

12.6.8. Setup flow for Fabric Synchronization

This section will cover generic setup sequences, which ecosystems MAY extend to provide the desired level of configuration options.

12.6.8.1. Fabric Synchronization Mutual Authentication

As a precondition to enabling the Fabric Synchronization feature, ecosystems MAY wait until the complete bi-directional commissioning of both ecosystems has been completed before exposing any Bridged Nodes. At this point, both ecosystems have received the device attestation from the other.

12.6.8.2. Scope of User Consent

Before or after commissioning a Fabric Synchronizing Administrator, the user SHALL be asked for consent to enable Fabric Synchronization functionality between ecosystems. This matches the existing single-device Administrator-Assisted Commissioning consent model that requires user consent when Matter devices are shared.

Each ecosystem SHALL independently ask the user for consent. This can be done before or after commissioning the device.

Similar to the Multi-Admin flow, after the share operation has been completed, the second Admin can now perform additional sharing operations with the device and/or data according to consent the user has given the second ecosystem.

12.6.8.3. Starting Condition

For the purpose of demonstrating the setup process, consider two ecosystems that provide Fabric Synchronization. These may have existing Matter devices commissioned on their independent fabrics.

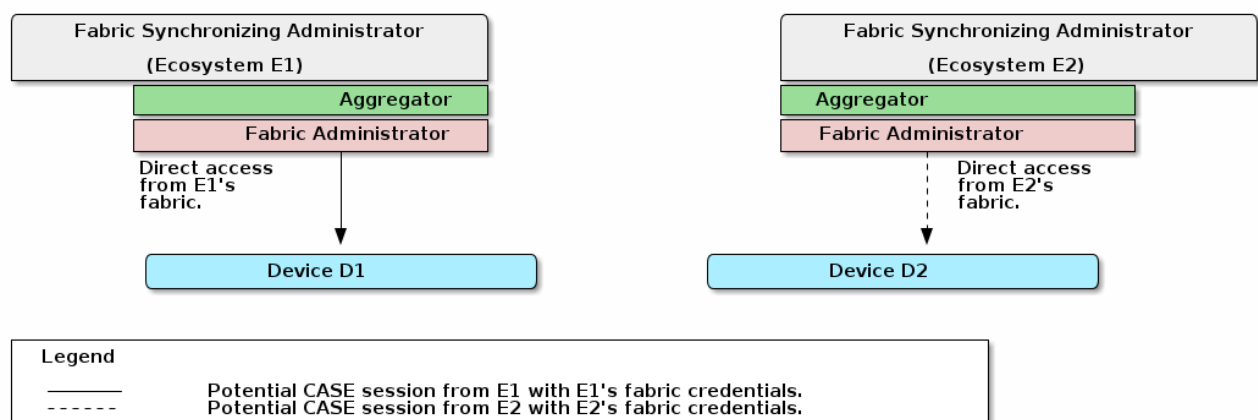


Figure 112. Fabric Synchronization Setup - Example Starting Condition.

12.6.8.4. Enabling Fabric Synchronization Between Two Ecosystems

User Action Summary (Informational)

To initiate the setup of Fabric Synchronization, the manufacturer-specific setup SHOULD include