


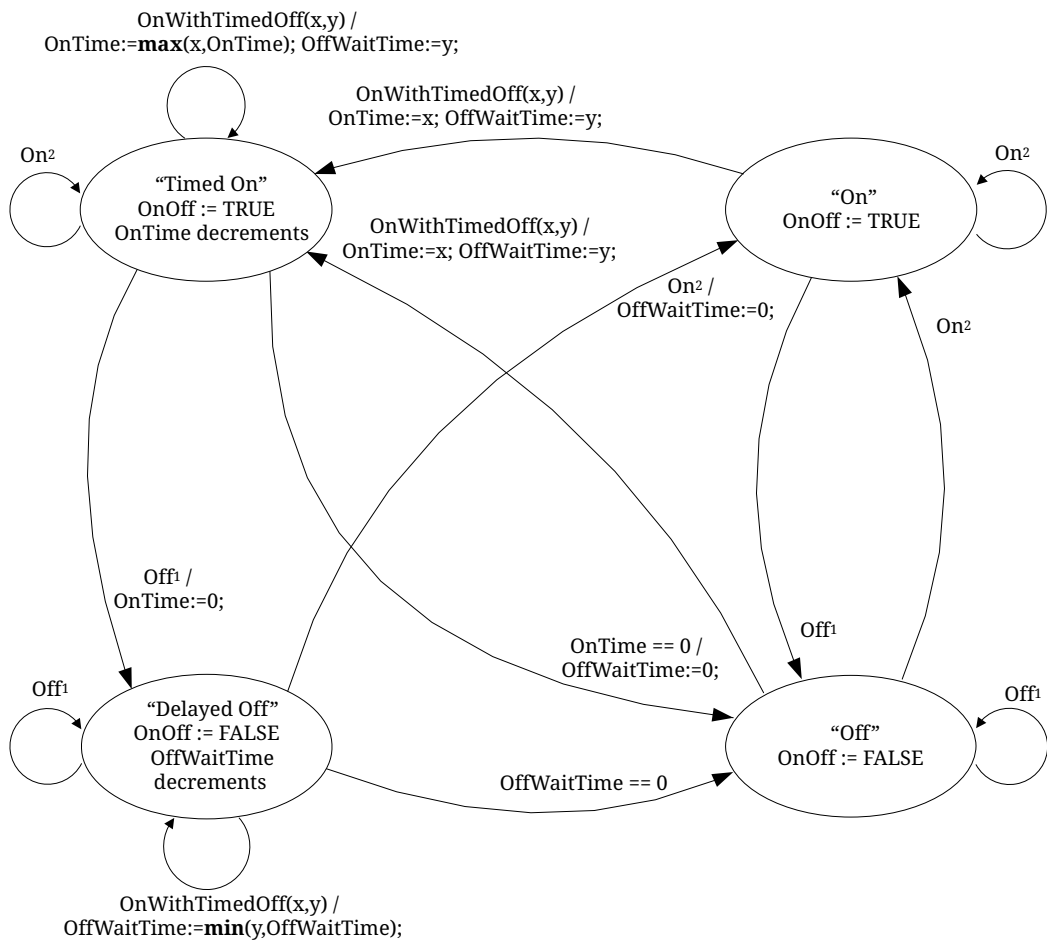

Off¹ : Any command which causes the OnOff attribute to be set to FALSE, e.g. Off, Toggle or OffWithEffect.  
On² : Any command which causes the OnOff attribute to be set to TRUE, e.g. On, Toggle or OnWithRecallGlobalScene.

Figure 2. On/Off Cluster Operation State Machine

## 1.6. Level Control Cluster

This cluster provides an interface for controlling a characteristic of a device that can be set to a level, for example the brightness of a light, the degree of closure of a door, or the power output of a heater.

### 1.6.1. Revision History

The global ClusterRevision attribute value SHALL be the highest revision number in the table below.

| Revision | Description                                                                                            |
|----------|--------------------------------------------------------------------------------------------------------|
| 1        | Mandatory global ClusterRevision attribute added                                                       |
| 2        | Added Options attribute, state change table; ZLO 1.0; Base cluster (no change) CCB 2085 1775 2281 2147 |