


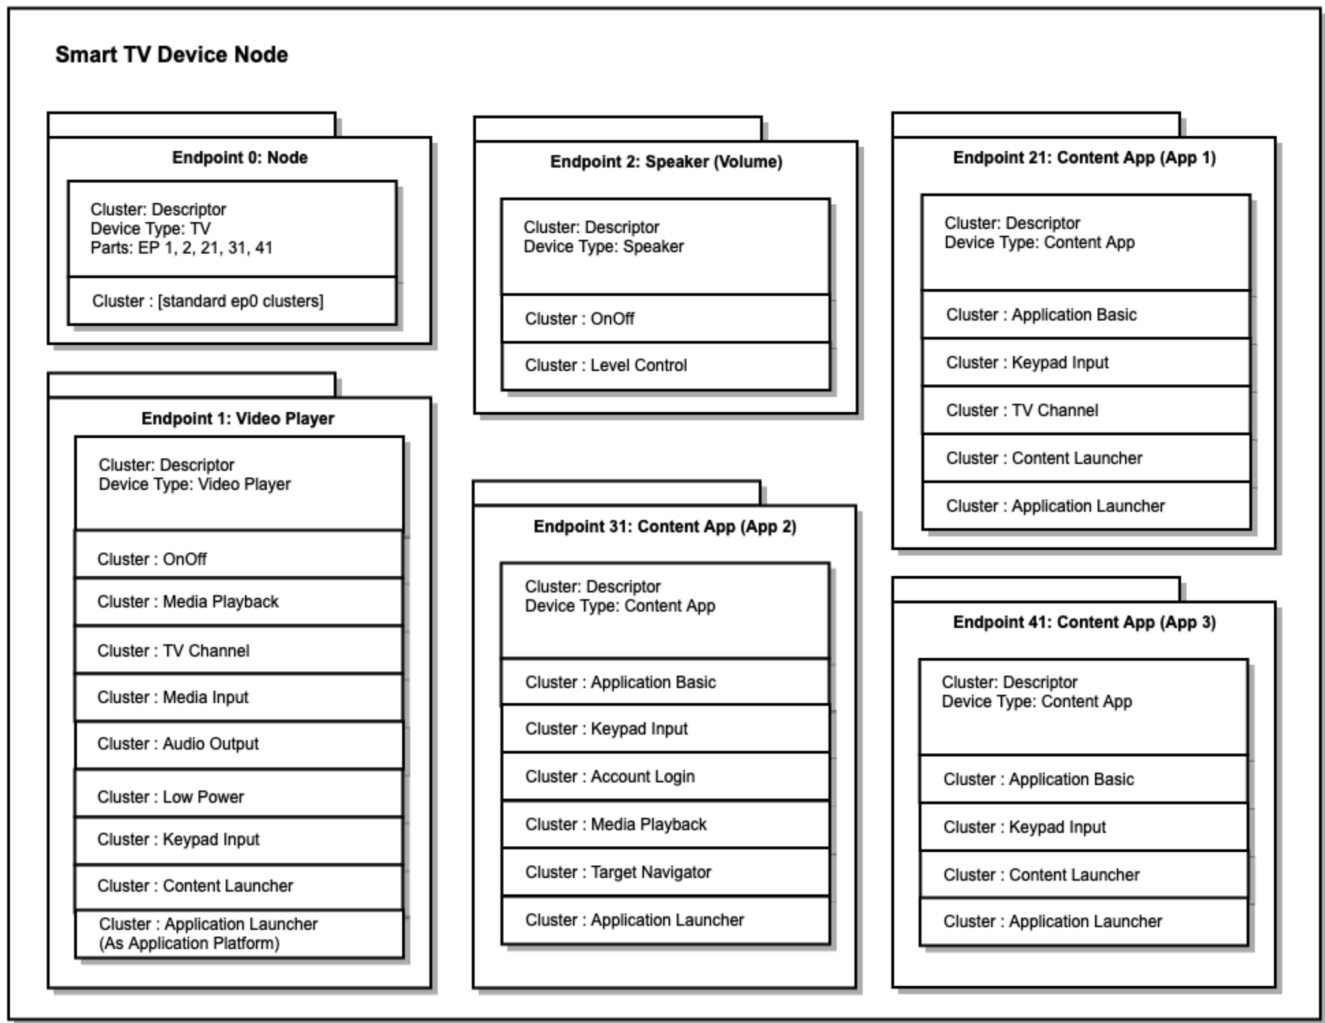

6.2. Account Login Cluster

This cluster provides commands that facilitate user account login on a Content App or a node. For example, a Content App running on a Video Player device, which is represented as an endpoint (see Device Type Library document), can use this cluster to help make the user account on the Content App match the user account on the Client.

Often a fabric administrator will facilitate commissioning of a Client (such as a Casting Video Client), and invoke commands on the AccountLogin cluster on the Content App associated with that client. Specifically:

1. GetSetupPIN in order to attempt to obtain the Passcode for commissioning.
2. Login in order to let the Content App know that commissioning has completed. The Content App can use information provided in this command in order to determine the user account associated with the client, and potentially assume that user account.
3. Logout in order to let the Content App know that client access has been removed, and potentially clear the current user account.

The cluster server for this cluster may be supported on each endpoint that represents a Content App on a Video Player device.

See Device Type Library document for details of how a Content App, represented as an endpoint on