

```

    },
    "attribute":4
  ]
}

```

← Capability bit[2]: Play bit equal to 1

### 13.1.5. Playback a file

Here shows how to specify and playback File b09. Confirm if the attribute of Response Parameter is playable. And the index of Request Parameter is 9.

#### Request

`http://{host}/YamahaExtendedControl/v1/netusb/setListControl?list_id=main&type=play&index=9`

#### Response

```

{
  "response_code":0
}

```

The File b09 in Folder B is now playback.

### 13.1.6. Moving back one layer

Here shows an example of how to move back to one layer.

#### Request


`http://{host}/YamahaExtendedControl/v1/netusb/setListControl  
?list_id=main&type=return`

#### Response

```

{
  "response_code":0
}

```

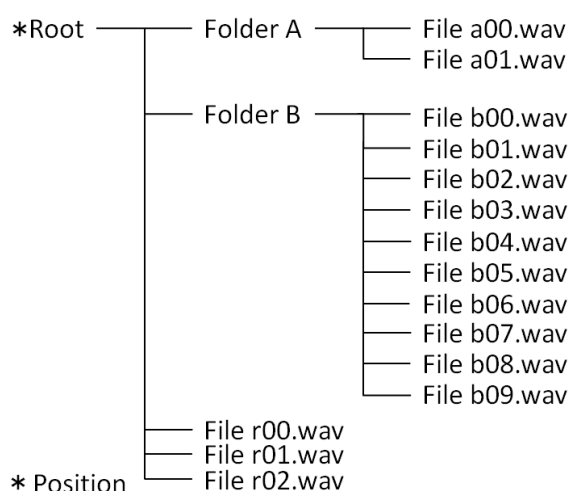

#### \*Note

getListInfo is the only command that blocks other commands execution. It may take up to 30 seconds to get the whole list information, and all other commands are not accepted all the while.