



AWS: SES (Simple email service)

Step 1-

Go to your SES dashboard . To add an user then go to ‘identities’ and click ‘create identity’

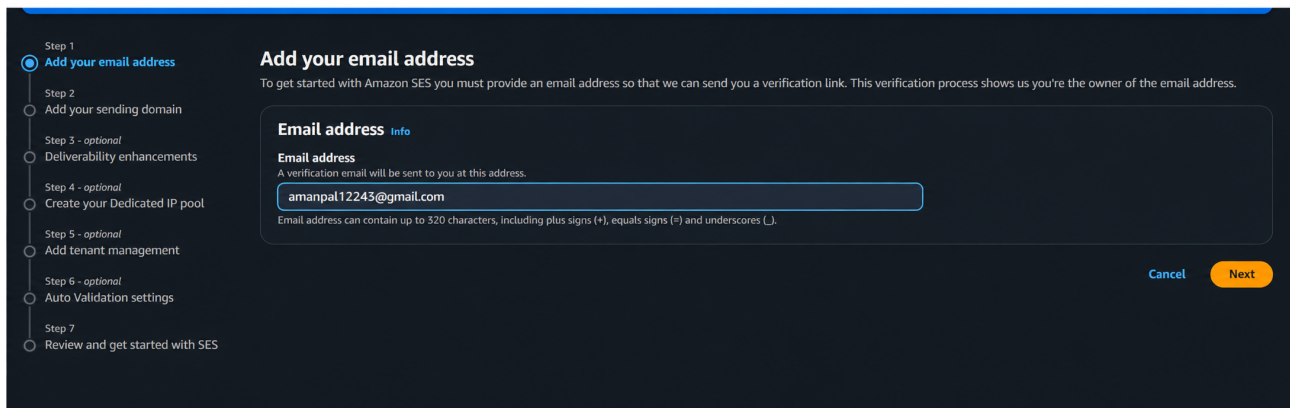

The screenshot shows the 'Add your email address' step in the AWS SES console. On the left, a vertical list of steps is shown, with 'Add your email address' selected. The main area has a title 'Add your email address' and a subtext: 'To get started with Amazon SES you must provide an email address so that we can send you a verification link. This verification process shows us you're the owner of the email address.' Below this is a form with a label 'Email address' and a sub-label 'Email address info'. The form contains the text 'amanpal12243@gmail.com'. A note below the input field states: 'Email address can contain up to 320 characters, including plus signs (+), equals signs (=) and underscores (_).' At the bottom right of the form are 'Cancel' and 'Next' buttons.

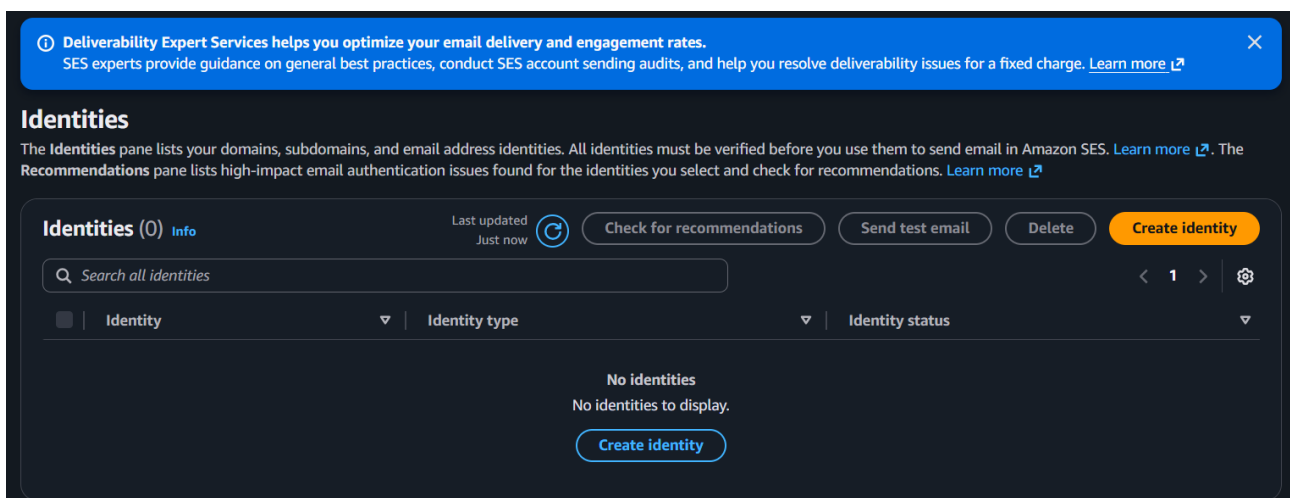

The screenshot shows the 'Identities' page in the AWS SES console. At the top, there is a blue banner for 'Deliverability Expert Services'. Below this, the 'Identities' section title is followed by a description: 'The Identities pane lists your domains, subdomains, and email address identities. All identities must be verified before you use them to send email in Amazon SES. Learn more'. Below the description is a 'Recommendations' pane. The main area shows a table with columns: 'Identity', 'Identity type', and 'Identity status'. The table is currently empty, displaying 'No identities' and 'No identities to display.' At the bottom of the table area is a 'Create identity' button. Above the table, there are buttons for 'Check for recommendations', 'Send test email', 'Delete', and 'Create identity'.

STEP 2-

Now select all the identity details. If you have a domain of your own then you can select domain as the option and fill the details. If you don't have a domain you can use email address. Select email as option and then write down the email to which you want to send the email to. Then click on ‘create identity’.

Create identity
An *identity* is a domain, subdomain, or email address you use to send email through Amazon SES. Identity verification at the domain level extends to all email addresses under one verified domain identity.

Identity details Info

Identity type

☐ Domain
To verify ownership of a domain, you must have access to its DNS settings to add the necessary records.

☒ Email address
To verify ownership of an email address, you must have access to its inbox to open the verification email.

ⓘ Sending email from an email address identity without having the domain identity verified will result in your message being quarantined or rejected depending on the domain's DMARC policy. [Learn more about DMARC and how to look up a domain's DMARC policy.](#)

Email address

nishu@gmail.com

Email address can contain up to 320 characters, including plus signs (+), equals signs (=) and underscores (_).

☐ Assign a default configuration set
Enabling this option ensures that the assigned configuration set is applied to messages sent from this identity by default whenever a configuration set isn't specified at the time of sending.

☐ Assign to a tenant
Assigning an identity to a tenant enables the tenant to use the identity for sending emails. The same identity can be assigned to multiple tenants or isolated to a single tenant.

Tags - optional Info
You can add one or more tags to help manage and organize your resources, including identities.

No tags associated with the resource.

[Add new tag](#)

STEP 3-

The person who's email is added will get the confirmation email which they are supposed to confirm . We can only send the email if the user confirms it using the email he/she would've received for it.

STEP 4-

Now go back to 'identity' and select the emails to which you want to send the email to. And then click on 'send test email'. We are sending test email because we don't have much identities added , after we add numerous identities we can modify it accordingly.

Summary

Identity status

✔ Verified

Amazon Resource Name (ARN)

arn:aws:ses:us-east-1:651215072791:identity/nishunishant551@gmail.com

AWS Region

US East (N. Virginia)

Recommendations

📘 Recommendations are available only for verified domain identities.

Enable Virtual Deliverability Manager to generate recommendations automatically

Authentication

Notifications

Authorization

Configuration set

Tenants

Tags

DomainKeys Identified Mail (DKIM) [Info](#)

DKIM-signed messages help receiving mail servers validate that a message was not forged or altered in transit.

📘 DKIM authentication can only be set at the domain level. Once set, if you send mail from an email address that uses a DKIM-verified domain, Amazon SES automatically authenticates it with the inherited DKIM properties from the domain. You have the option to override these properties and send email without DKIM authentication, and you can choose to reenable it later. Read about [inherited DKIM signing and how to override it](#).

Send test email [Info](#)

The Amazon SES mailbox simulator lets you test how your application handles different email sending scenarios. Emails that you send to the mailbox simulator do not count towards your sending quota or your bounce and complaint rates. [Learn more](#)

Message details

Email format

☐ Formatted

Choose this option if you want to construct a simple test message using the form provided. SES takes the information entered in the form and parses it into email format for you.

☒ Raw

Choose this option if you want to send a more complex test message, such as one that uses HTML or includes attachments. This option requires you to format the entire message yourself.

From-address

nishunishant551@gmail.com

Scenario [Info](#)

Choose the email sending scenario that you want to simulate. Each scenario corresponds to a different recipient email address managed by the mailbox simulator. To specify a custom recipient, select Custom.

Successful delivery

success@simulator.amazonses.com

Message [Info](#)

Your message must be constructed using MIME formatting and must specify all of the message headers, as well as the message body.

helllooo