

+, <<, >>, =, []

string id = "2";
(), -> int n = stoi(id) // conversion function



The functions that convert one type into the another type
specifically the user defined type into fundamental type and vice versa

Time t1;
t1.display();



t1->display();// NOT OK

Time *ptr = new Time();
ptr->display();
delete ptr;

SmartPointers

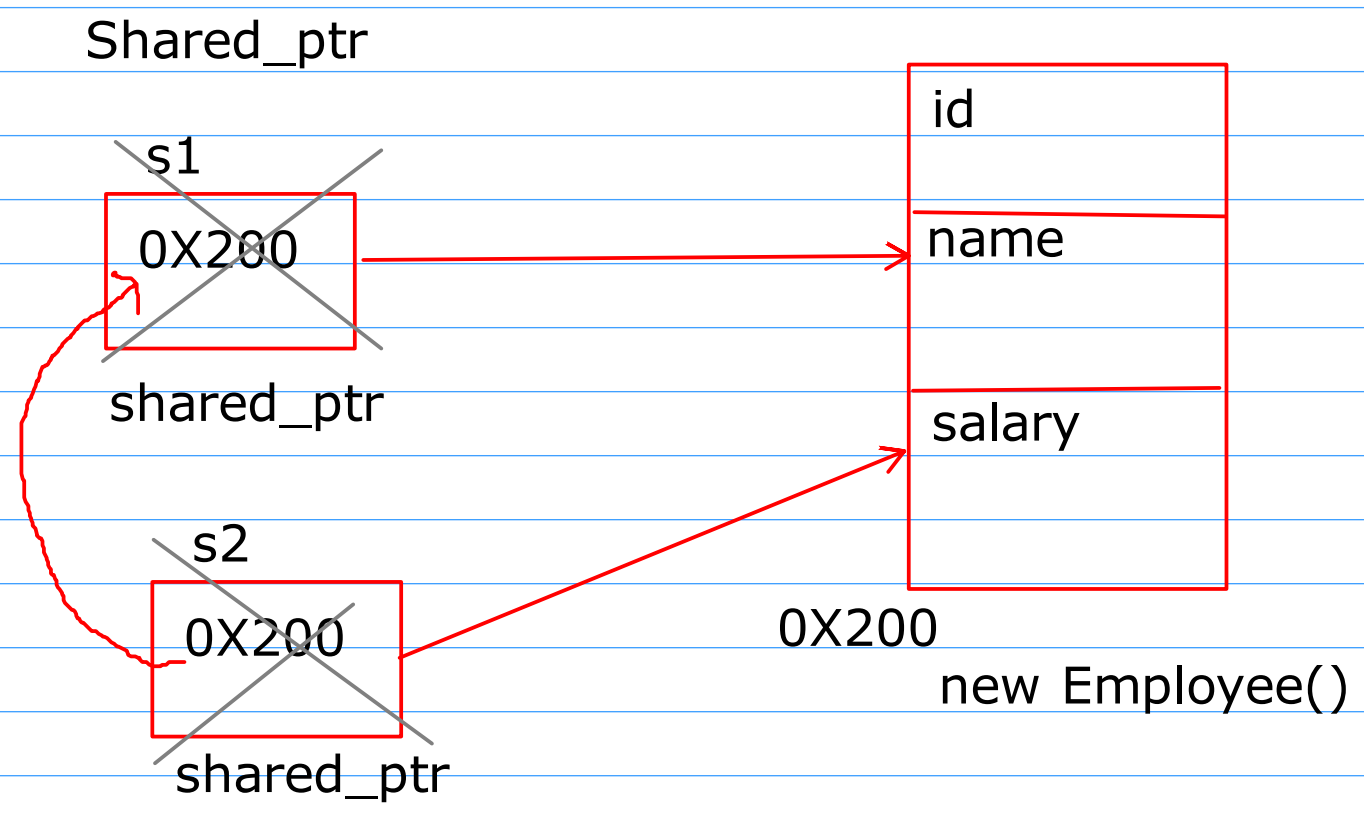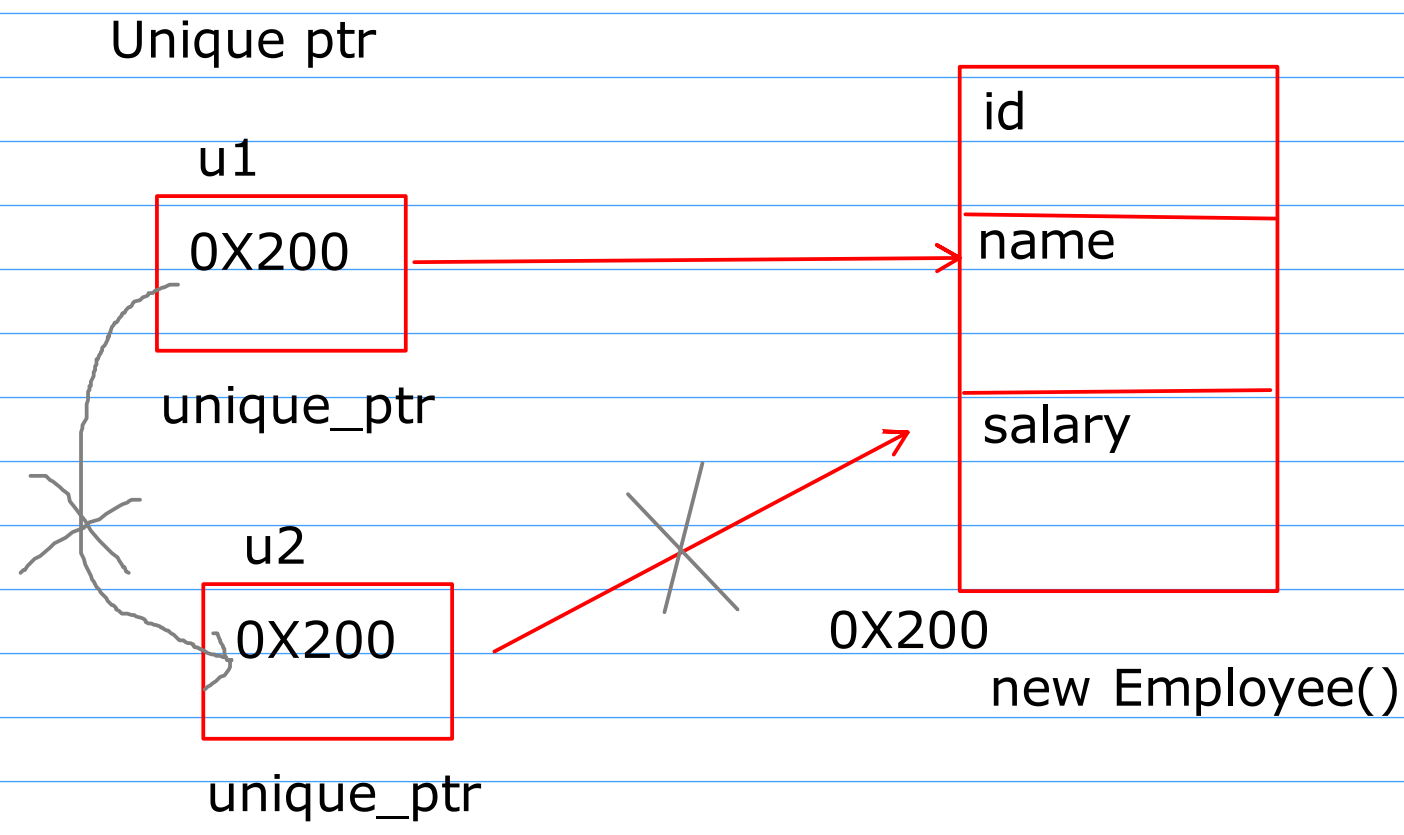

weak_ptr

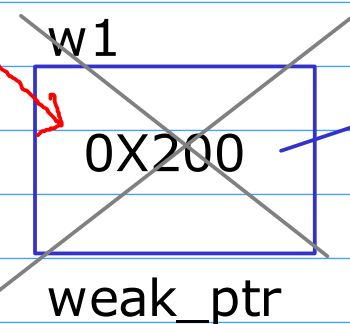

0X200
new Employee()

