



Object	Properties	CPP
{}	Methods	Java
new Object		
Ctor Function		

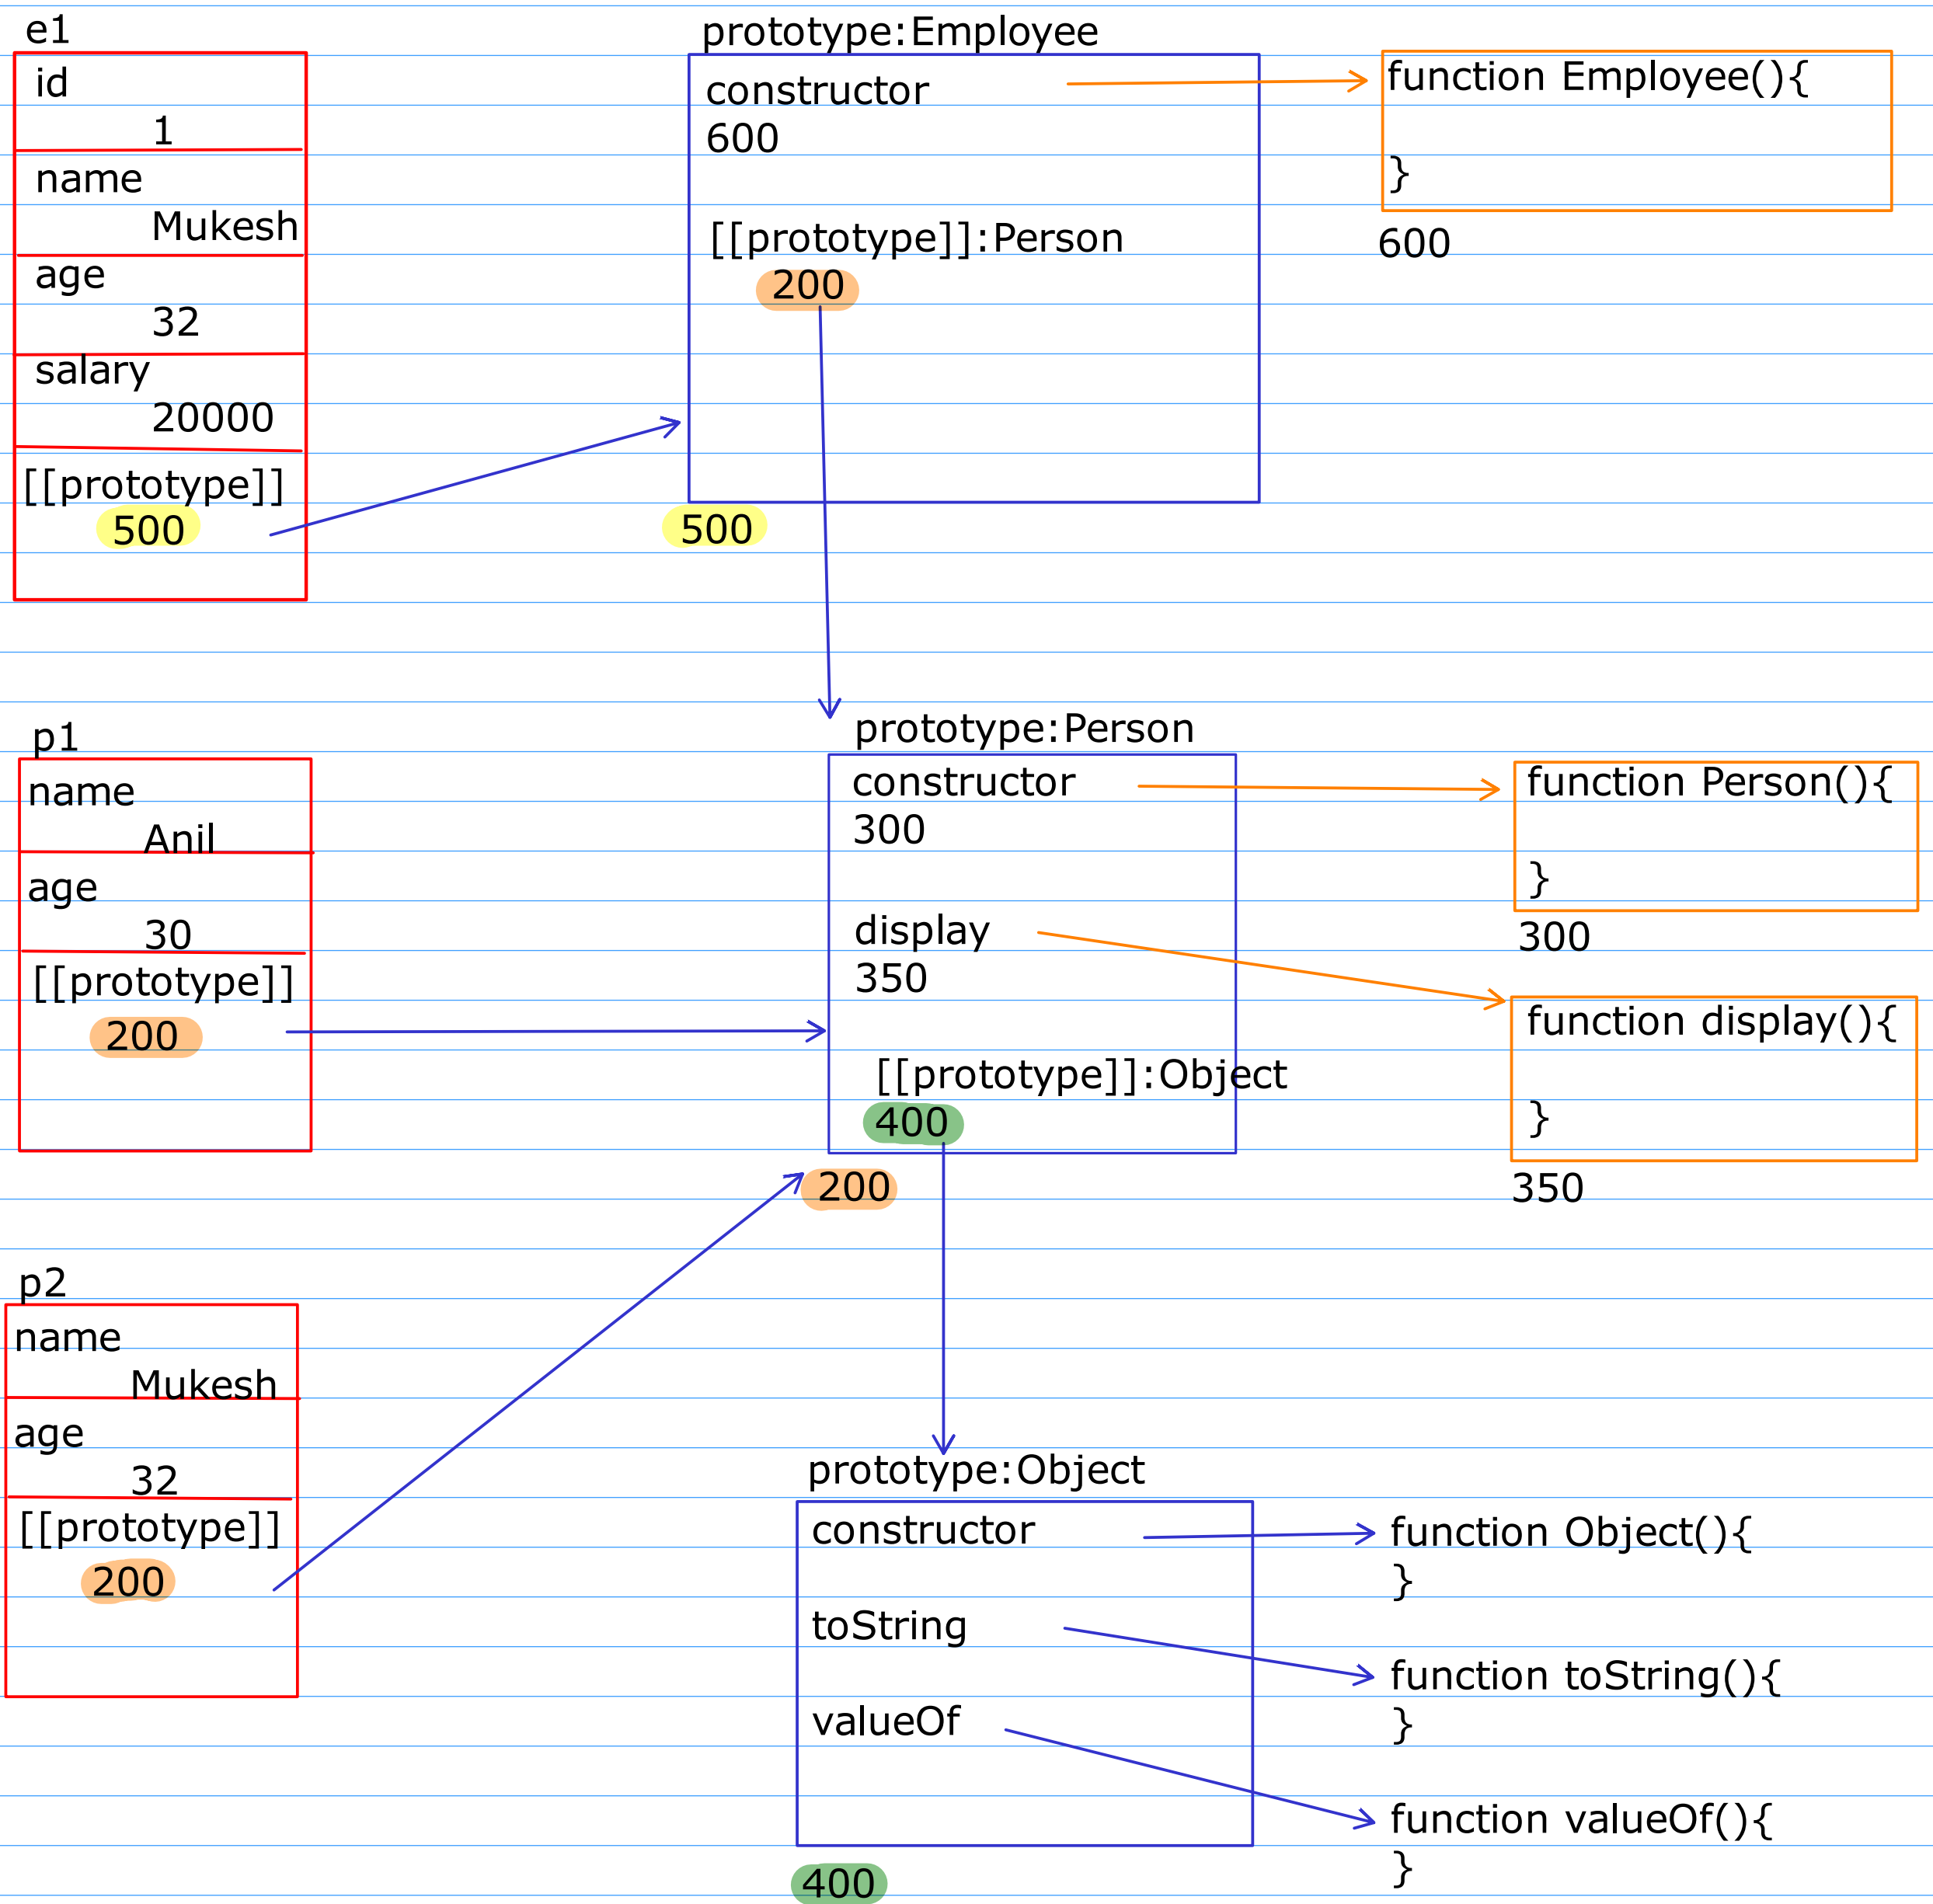

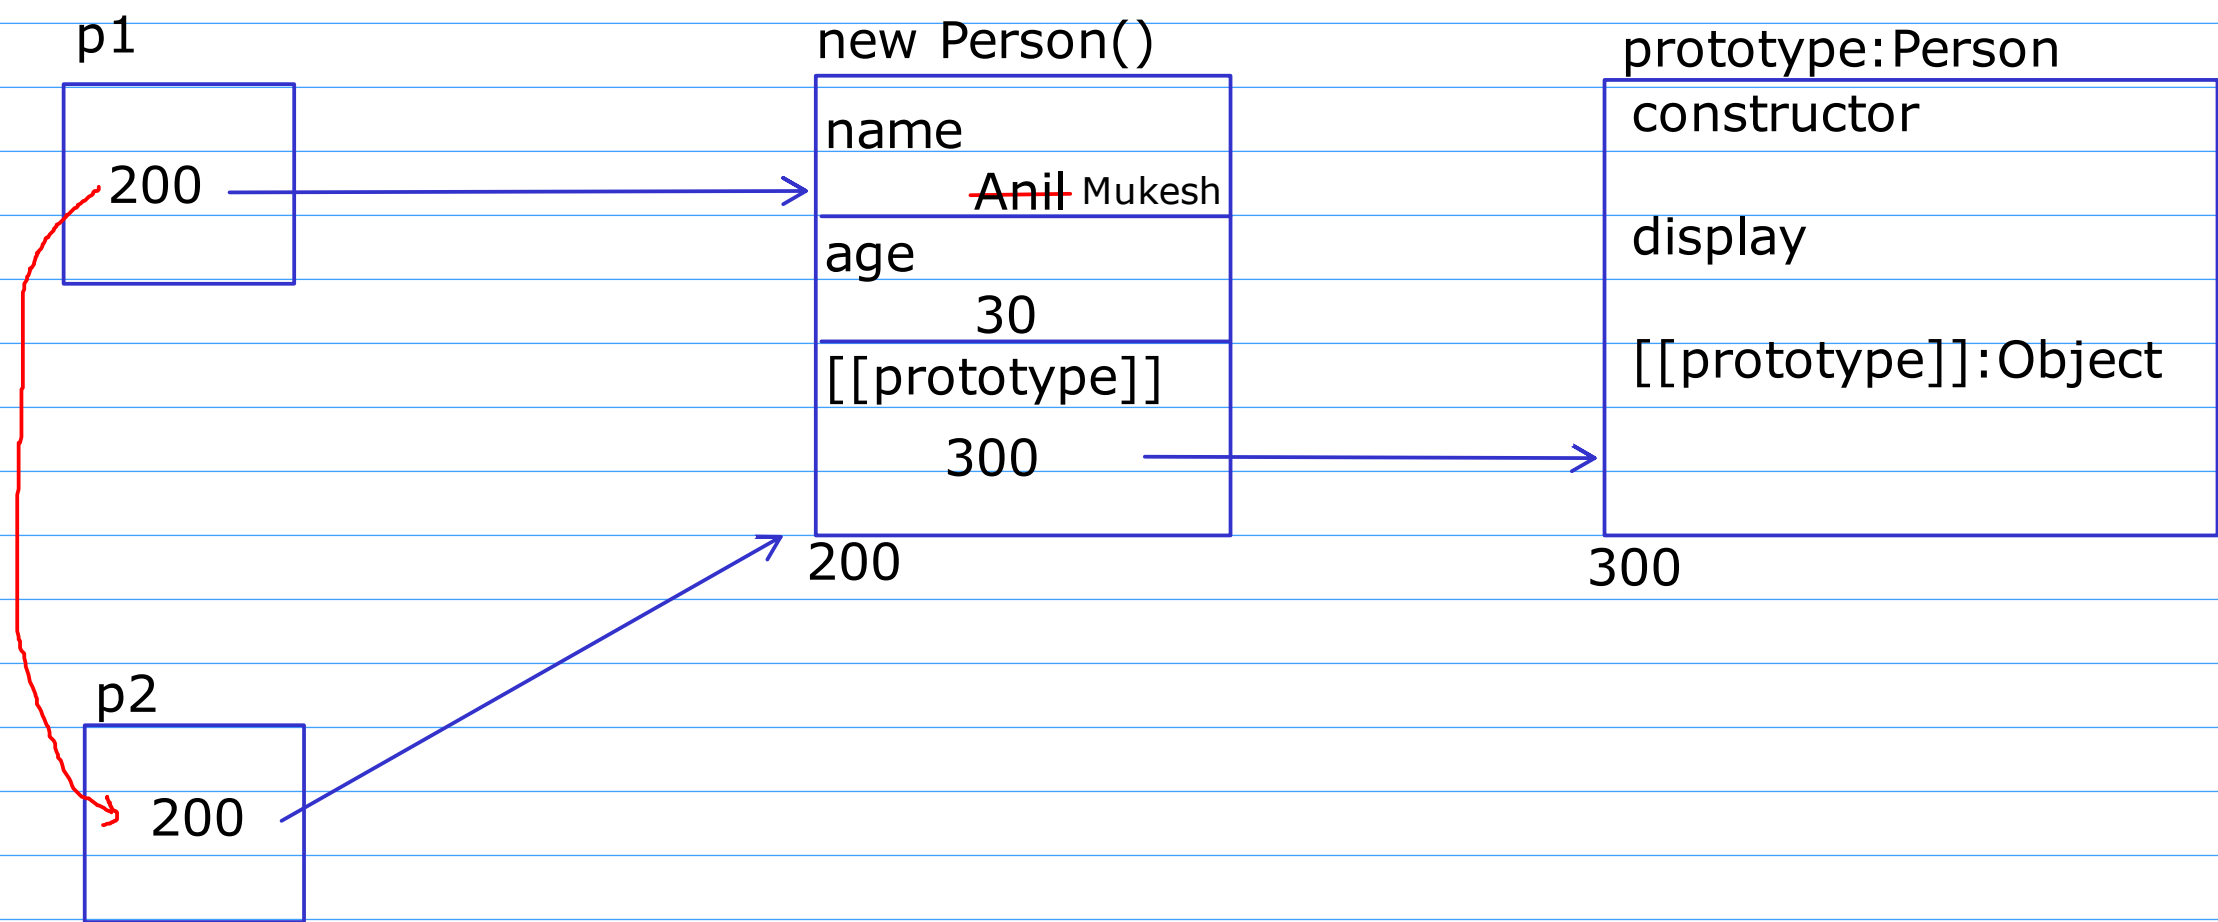


let p2 = p1

DOM - Document Object Model

window -> object created by the browser

document

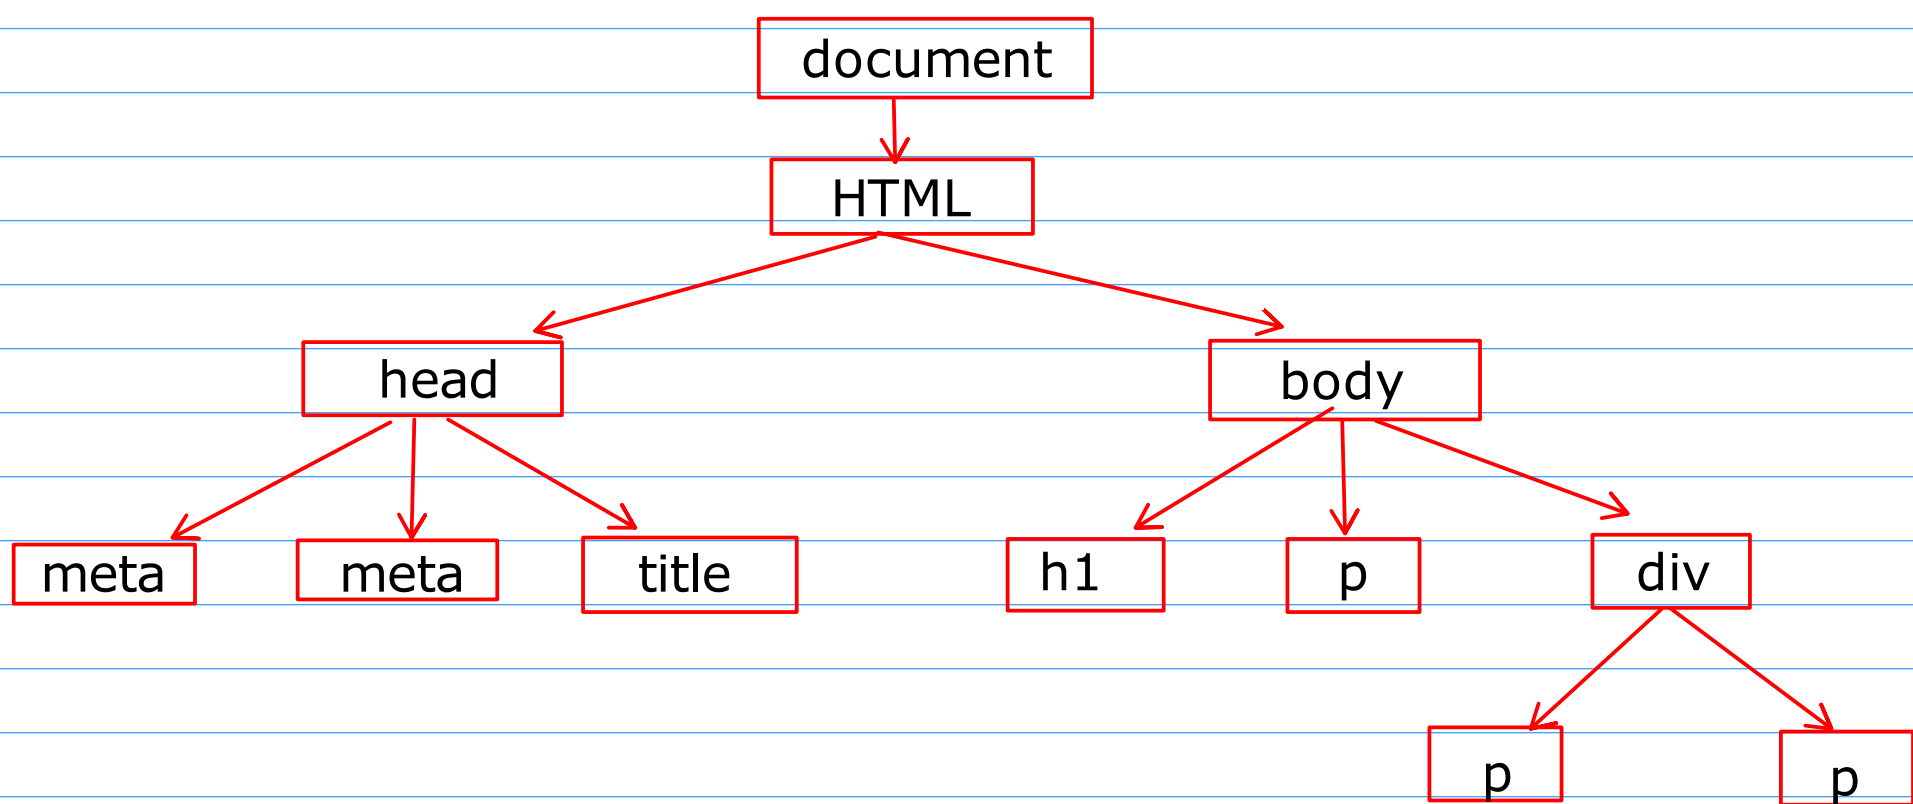

- to access the elements of HTML use document object.
- we can access the elements by using the property firstElementChild, lastElementChild or children
- from the accessed elements we want to change the text inside it use innerText property
- and if we want to chane the html code inside it use the property innerHTML

courses

save

ul

li