


# PROJECT REPORT

# PROJECT TITLE

## ONLINE EDUCATION SYSTEM

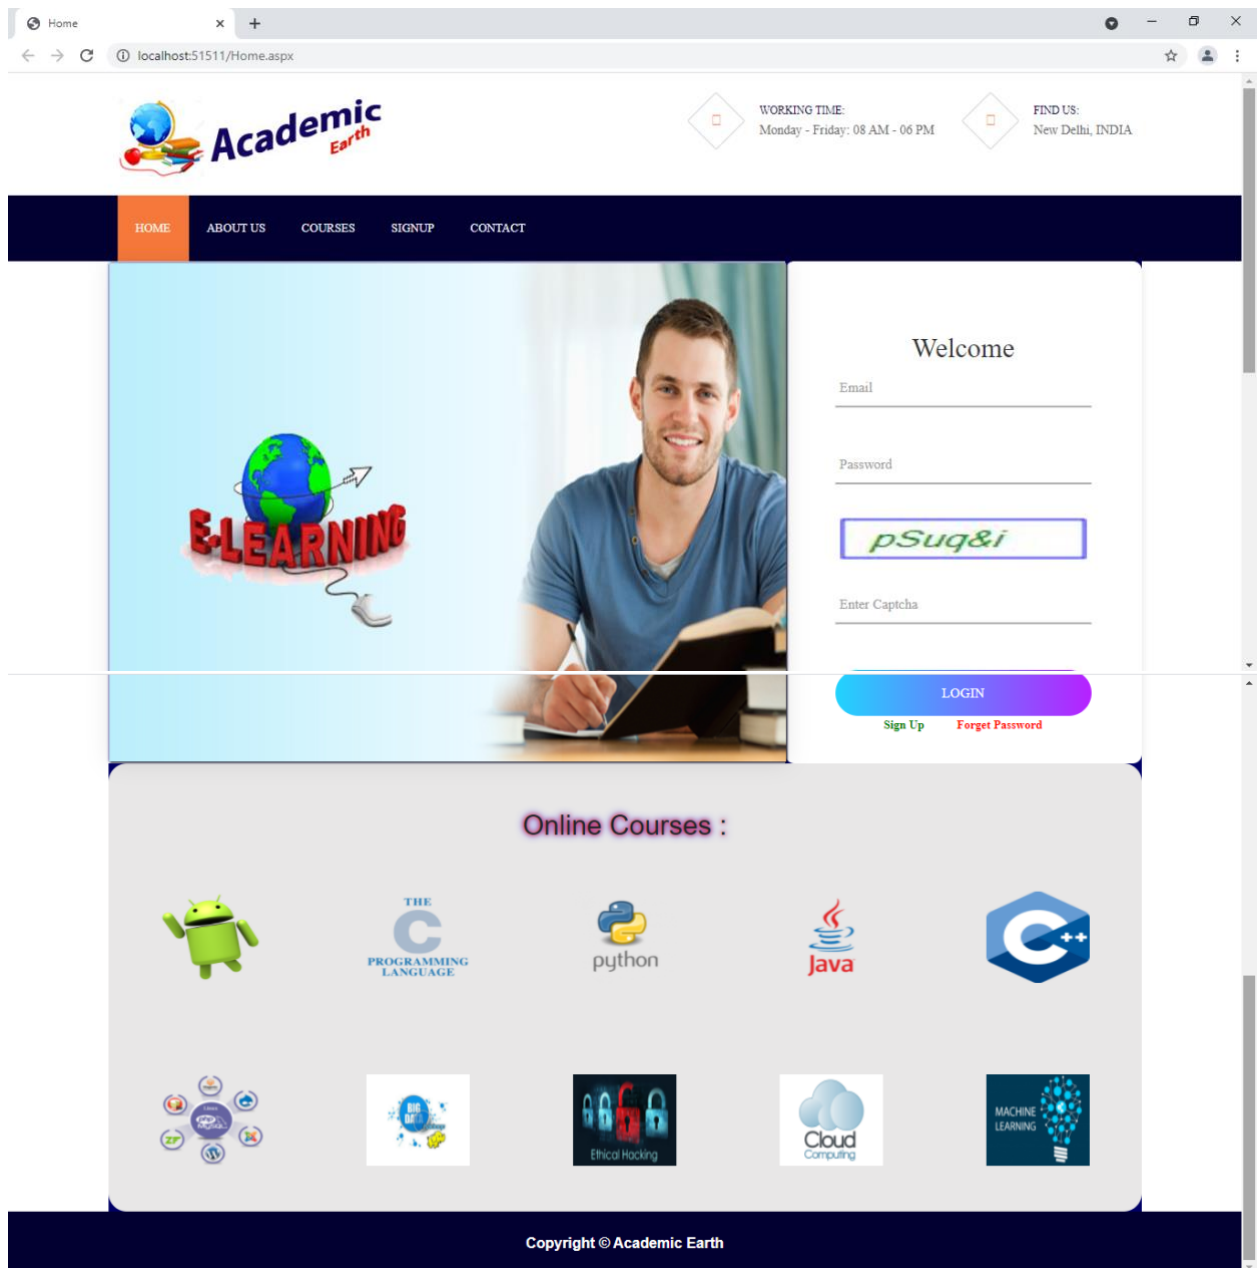

# PROJECT INTRODUCTION

Online education is a form of education where students use their computers, mobiles and tablets through the internet. Online education has become popular in the past decade. Online education is electronically supported learning that relies on the internet for teacher and student interaction and the distribution of class materials. Online education can include audio, videos, text, animation, virtual training environment and live chats with teachers. It can be engaging, fun and tailored to fit almost anyone's schedule. All live videos are kept in recorded form after class. Online education has become a viable and exciting method for instructional delivery in the global business society that runs on a 24/7 schedule (24 hours a day/7 days a week) because it provides students with great flexibility.

## **Online education offers many positive benefits since students:**

- have flexibility in taking classes and working at their own pace and time
- learn to become responsible for their own education with information available at their fingertips
- find the submission of assignments easy and convenient
- are more apt to voice their own opinions and share and debate issues with other students, as well as learn from other students during the group discussions

## **Possible negative effects of learning online are that some students:**

- may miss the face-to-face interaction with the instructor and among students
- may prefer to attend traditional classes with an instructor who teaches and guides them through the course

# PROJECT OBJECTIVE

The internet has become an essential part of our daily life, and many teacher came online and teach students. Now a days every work is going to computerized, manpower is used with computer system to increase the efficiency and reliability of the work. it also provides a lot of time to do that work with friendliness.

The primary aim of this project is to demonstrate that with the better interactive features with students and teachers.\_The objective of this project is to provide freely online smart class anywhere and anytime. Every School and college can access it easily.

**The objectives of the project are as follows:**

- Enhance the quality of learning and teaching.
- Meet the learning style of needs of students.
- Improve the efficiency and effectiveness.
- Improve user-accessibility and time flexibility to engage learners in the learning process.
- Doubts session or test paper regularly discuss.
- Learn from anywhere or anytime.
- Save travel time and cost.

# SOFTWARE REQUIREMENT SPECIFICATION

The System Requirement Specification provides the software designer with a representation of information, function and behavior that can be translated to architectural, interface and component-level designs. The Requirement specification specified the software operational characteristics; indicates software's interface with other system elements; and establish constraints that software must meet. In the development of project the following requirements specifications of Organization are considered:

## **User Requirements:**

It deals with the working of the Administrator or Operator of the Web Site Application. Basically it is a document having the details of all the constraints. In this Project, The users have to login according to their authentic User ID and Password; the any other activities can't be performed without Authorization.

It must include:

- An user must be an authorize one
- Different level of user has limited access
- Duplication of User Id & Password is not allowed

## **System Requirements:**

It is a detailed description of the user requirements. It served on the basis of their contracts for the implementation of the system; therefore it is the complete and consistent specification of the whole system. It specifies the user requirements.

In this System the basic user requirements are:


- Have a complete good services and Monitoring System
- Analytical reports can be generated according to their requirements.
- One time entry should be used to generate the respective reports.

# MODEL ADOPTED

In IEEE glossary software engineering is defined as the application of systematic, disciplined, quantifiable approach to the development, operation and maintenance of software, that is, the application of engineering to software. In the last few decades, the computer industry has undergone revolutionary changes in hardware to maintain the compatibility with hardware, the complexity of software has also changed.

Software engineering provides models that lead to the production of well documented software in a manner that is predictable. For a mature process, it should be possible to determine in advance how much time and effort will be required to produce the final product. To develop successful software following model has been considered, which act as guideline.

The model I have used is **Waterfall Model or Classic Life Cycle** model is also the simplest and oldest, and most widely used process model. Unlike Build and Fix Model which has two phases in first phase code is developed and in another code is fixed in this model, each phase of the life cycle is completed before the startup of new phase. This is the first engineering approach of software development. Then customer requirements are taken in consideration then planning, modeling, construction and finally deployment.

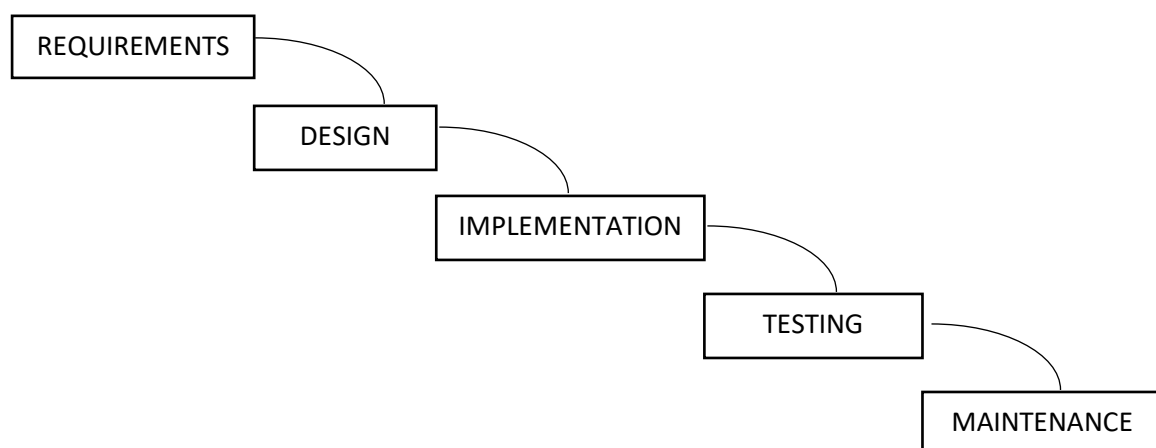

# **SOFTWARE BACKGROUND**

## **Windows 10:**

Windows 10 is a series of operating system developed by Microsoft. It is successor to windows 8.1. Microsoft released Windows 10 in July 2015. The company has said it will update Windows 10 continuously, rather than release a new, full-fledged operating system as a successor.

## **Windows 10 system requirements:**

The minimum Windows 10 hardware requirements for a PC or 2-in-1 device are:

- Processor: 1 gigahertz (GHz) or faster processor or system-on-a-chip (SoC)
- RAM: 1 gigabyte (GB) for 32-bit or 2 GB for 64-bit
- Hard disk space: 16 GB for 32-bit OS 20 GB for 64-bit OS
- Graphics card: DirectX 9 or later with Windows Display Driver Model 1.0
- Display: 800x600

## **SECURITY:**

Windows 10 includes Windows Security, which provides the latest antivirus protection. The device will be actively protected from the moment of start Windows 10. Windows Security continually scans for malware, viruses, and security threats. In addition to this real-time protection, updates are downloaded automatically to help keep your device safe and protect it from threats.

## **ASP .NET:**

ASP .NET 2.0 is an HTML-embedded scripting language. Much of its syntax is borrowed from C, JAVA and Perl with a couple of unique ASP .NET 2.0. The goal of the language is to allow web developers to write dynamically generated pages quickly. This is generally a good definition of ASP .NET 2.0. However, it does contain a lot of terms you may not be used to. When someone visits your ASP .NET 2.0 webpage, your web server processes the ASP .NET 2.0 code. It then sees which parts it needs to show to visitors and hides the other stuff (file operations, math calculations, etc.) then translates your ASP .NET 2.0 into HTML. After the translation into HTML, it sends the webpage to your visitor's web browser.

**ASP .NET 2.0 will allow you to:**

- Reduce the time to create large websites.
- Create customized user experience for visitors based on information that you have gathered from them.
- Open up thousands of possibilities for online tools. Check out ASP .NET 2.0 – Hot Scripts for examples of the great things that are possible with ASP .NET 2.0.
- Allow creation of shopping carts for e-commerce websites.

## **SQL SERVER:**

A database is a collection of information that is organised so that it can be easily accessed, managed and updated. Using Microsoft SQL server, we can manage all our information from a single database file. Within the file, divide our data into separate storage containers called table, view and update table data using offline forms, and retrieve just the data we want using queries and analyse or print the data in a specific layout using report.

- To store our data create one table for each type of information we track. To bring the from multiple tables together a query, form or report, we define the relationship between the table.
- To find the retrieve just the data that meets conditions we specify, including data from multiple tables, create a query. A query can also update or delete single records at one time, and perform built-in or custom calculations on our data.
- To analyse our data or present it a certain way it print, create a reports.

## **JAVA SCRIPTS:**

JavaScript is a programming language commonly used in web development. It was originally developed by Netscape as a means to add dynamic and interactive elements to websites. While JavaScript is influenced by Java, the syntax is more similar to C and is based on ECMAScript, a scripting language developed by Sun Microsystems.

JavaScript is a client-side scripting language, which means the source code is processed by the client's web browser rather than on the web server. This means

JavaScript functions can run after a webpage has loaded without communicating with the server. For example, a JavaScript function may check a web form before it is submitted to make sure all the required fields have been filled out. The JavaScript code can produce an error message before any information is actually transmitted to the server. JavaScript functions can be called within **<script>** tags or when specific events take place.



# PROBLEM ANALYSIS

## **Software requirement Analysis and specification:**

During our analysis of the project, we referred various books and manuals and conduct questionnaire with various administrators. The job of system administrator involves the maintain the new entry broker who are wanted to do testing, getting detail knowledge of the testing on videos, videos quality, comment section. This task is usually entrusted to a single person, the system administrator, also known as the super user. He has vest powers, having access to practically everything.

## **System planning:**

Scheduling of a software project does not differ greatly from System administrator in windows 10 is not quite demanding and requires form the administrator in a depth knowledge of the different components. The above stated task of a system administration is considered as routine duties of an administrator. But system problem can be quite grave and unexpected by identify the system responsibilities of an administrator to be quite demanding requiring a knowledge of the system. We identified a need of “graphical tool for the task of system administration as its menu and screens will guide him through the whole process.

## **Project Estimation:**

The project size is another important factor for the project estimation that can affect accuracy and efficacy of estimations. As size increase, the interdependency among various elements of the software grown rapidly.

## **Risk Analysis:**

Risk analysis and management are a series of steps that help a software team to understand and manage uncertainty. Many problems can affects a software project. A risk is a potential problem-it might happen it might not.

- **Natural risk:** Natural threats may be caused by natural disaster like fire, storm, earthquake, floods etc.
- **Deliberative act risk:** Threats may come from fraud, broker etc.
- **Unintended risk:** There may be some unavoidable threats like computer bug, traffic load on server.

# SYSTEM DESIGN


System design is a detail study of various operations performed by a system and its relationship with in end outside the system. A system is a collection of interrelated components that work together to achieve common objective and system analysis is the specification of what the system required. ERD (Entity relationship diagram) and DFD( Data Flow Diagram )are the tools which are used for designing.

## **DFD (DATA FLOW DIAGRAM):**


The data flow diagram is a graphical representation of the flow of data through an information system. Data flow diagram is also used for utilisation of data processing. Data flow daigram is initial step to create an overview of the system without going into great details. It is divided into many parts 0 level, 1<sup>st</sup> level and 2<sup>nd</sup> level etc.

## **ER Diagram (ENTITY RELATIONSHIP DIAGRAM):**


Entity relationship diagram is a graphical representation of an information system that shows relationship between people, object, place, concepts or events within that system. There is a relation between two attributes: the relation is either **one to many**, **many to one** and **many to many**.

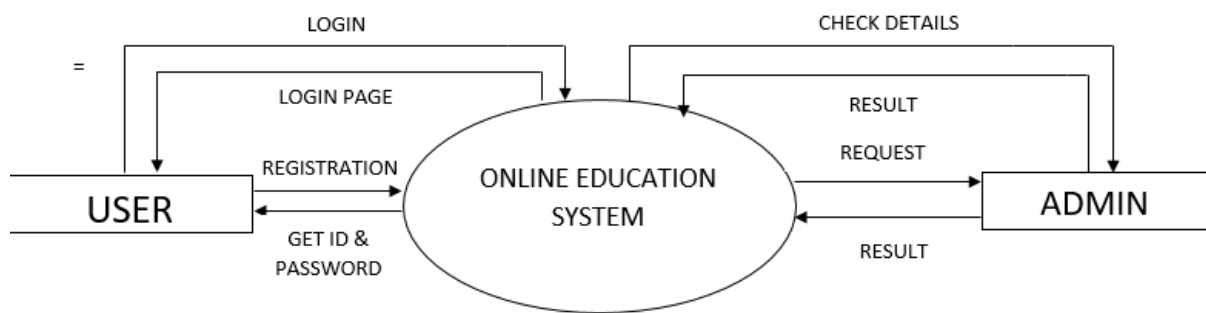


0 LEVEL FOR ADMIN AND USER

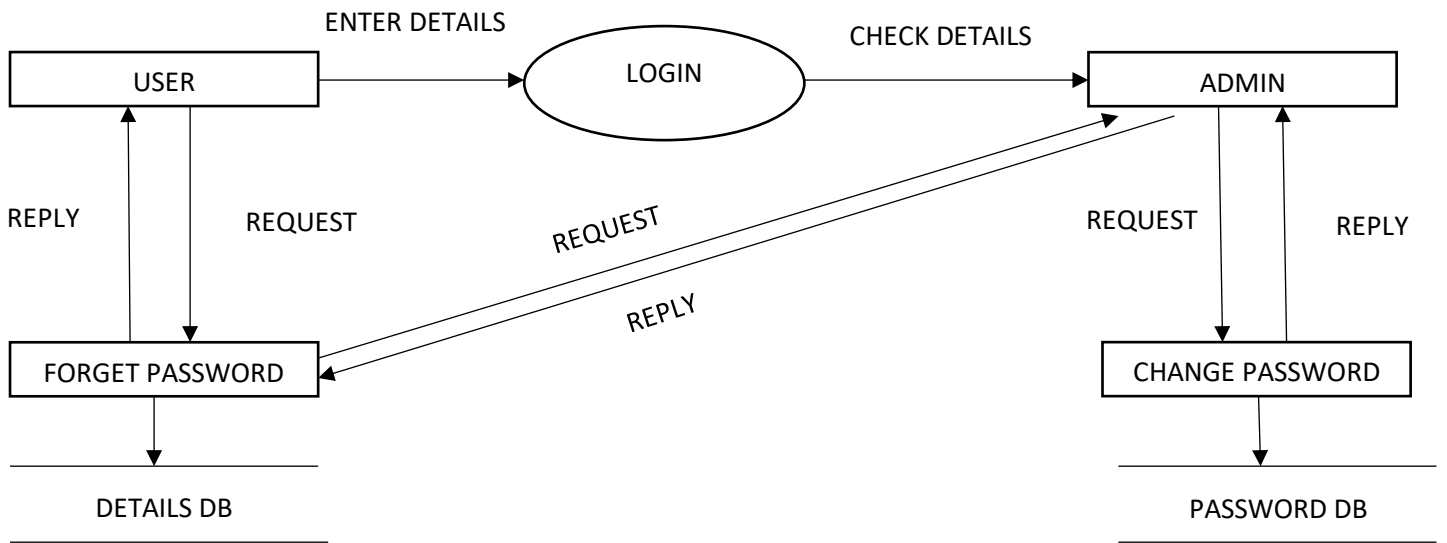


2<sup>ND</sup> LEVEL DFD

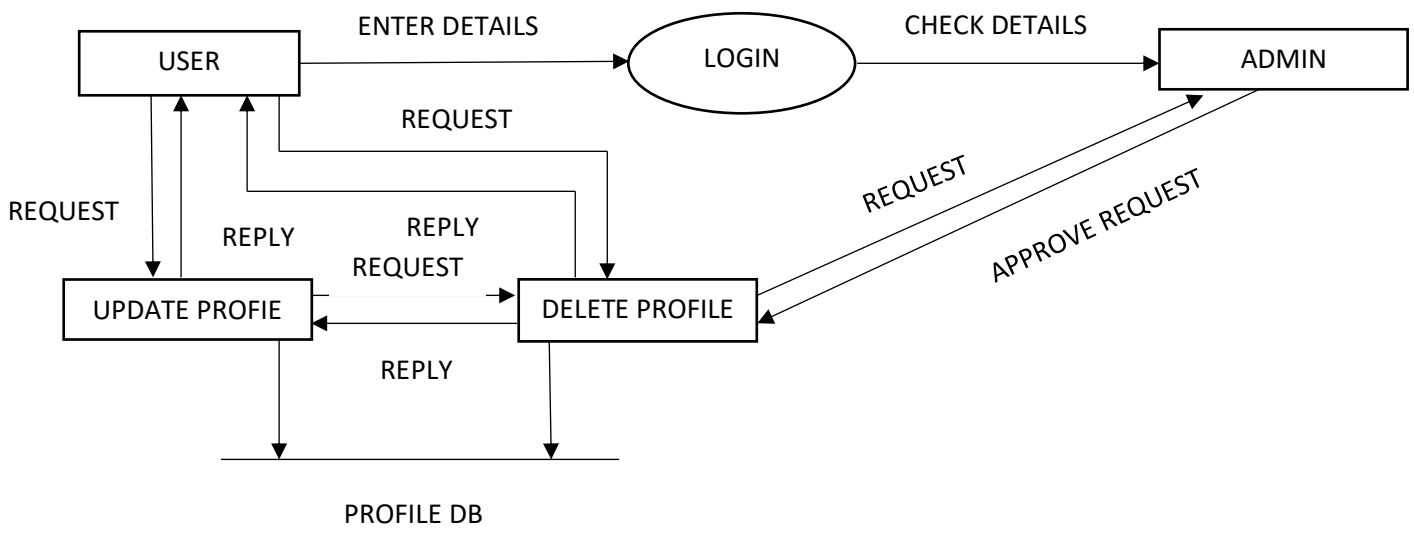


2<sup>ND</sup> LEVEL DFD

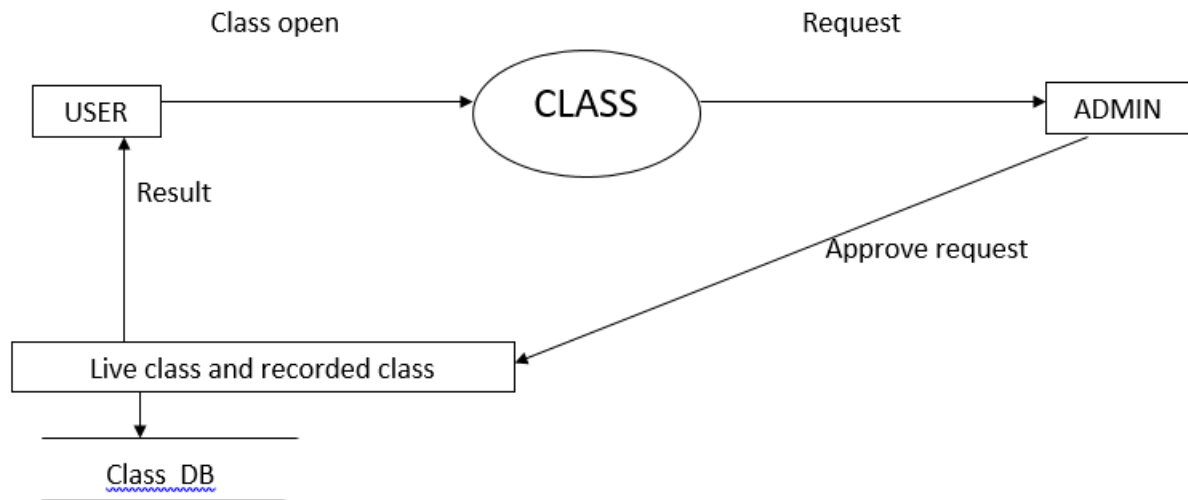

## 2<sup>ND</sup> LEVEL DFD

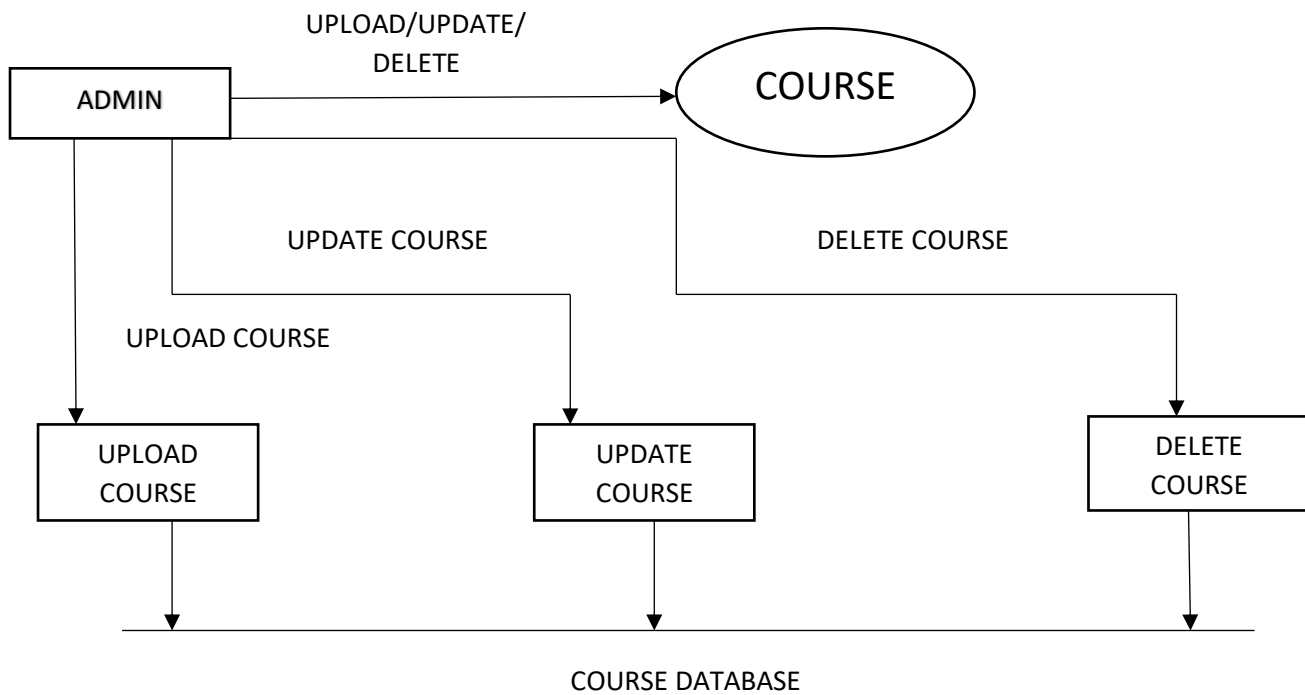

## 2<sup>ND</sup> LEVEL DFD

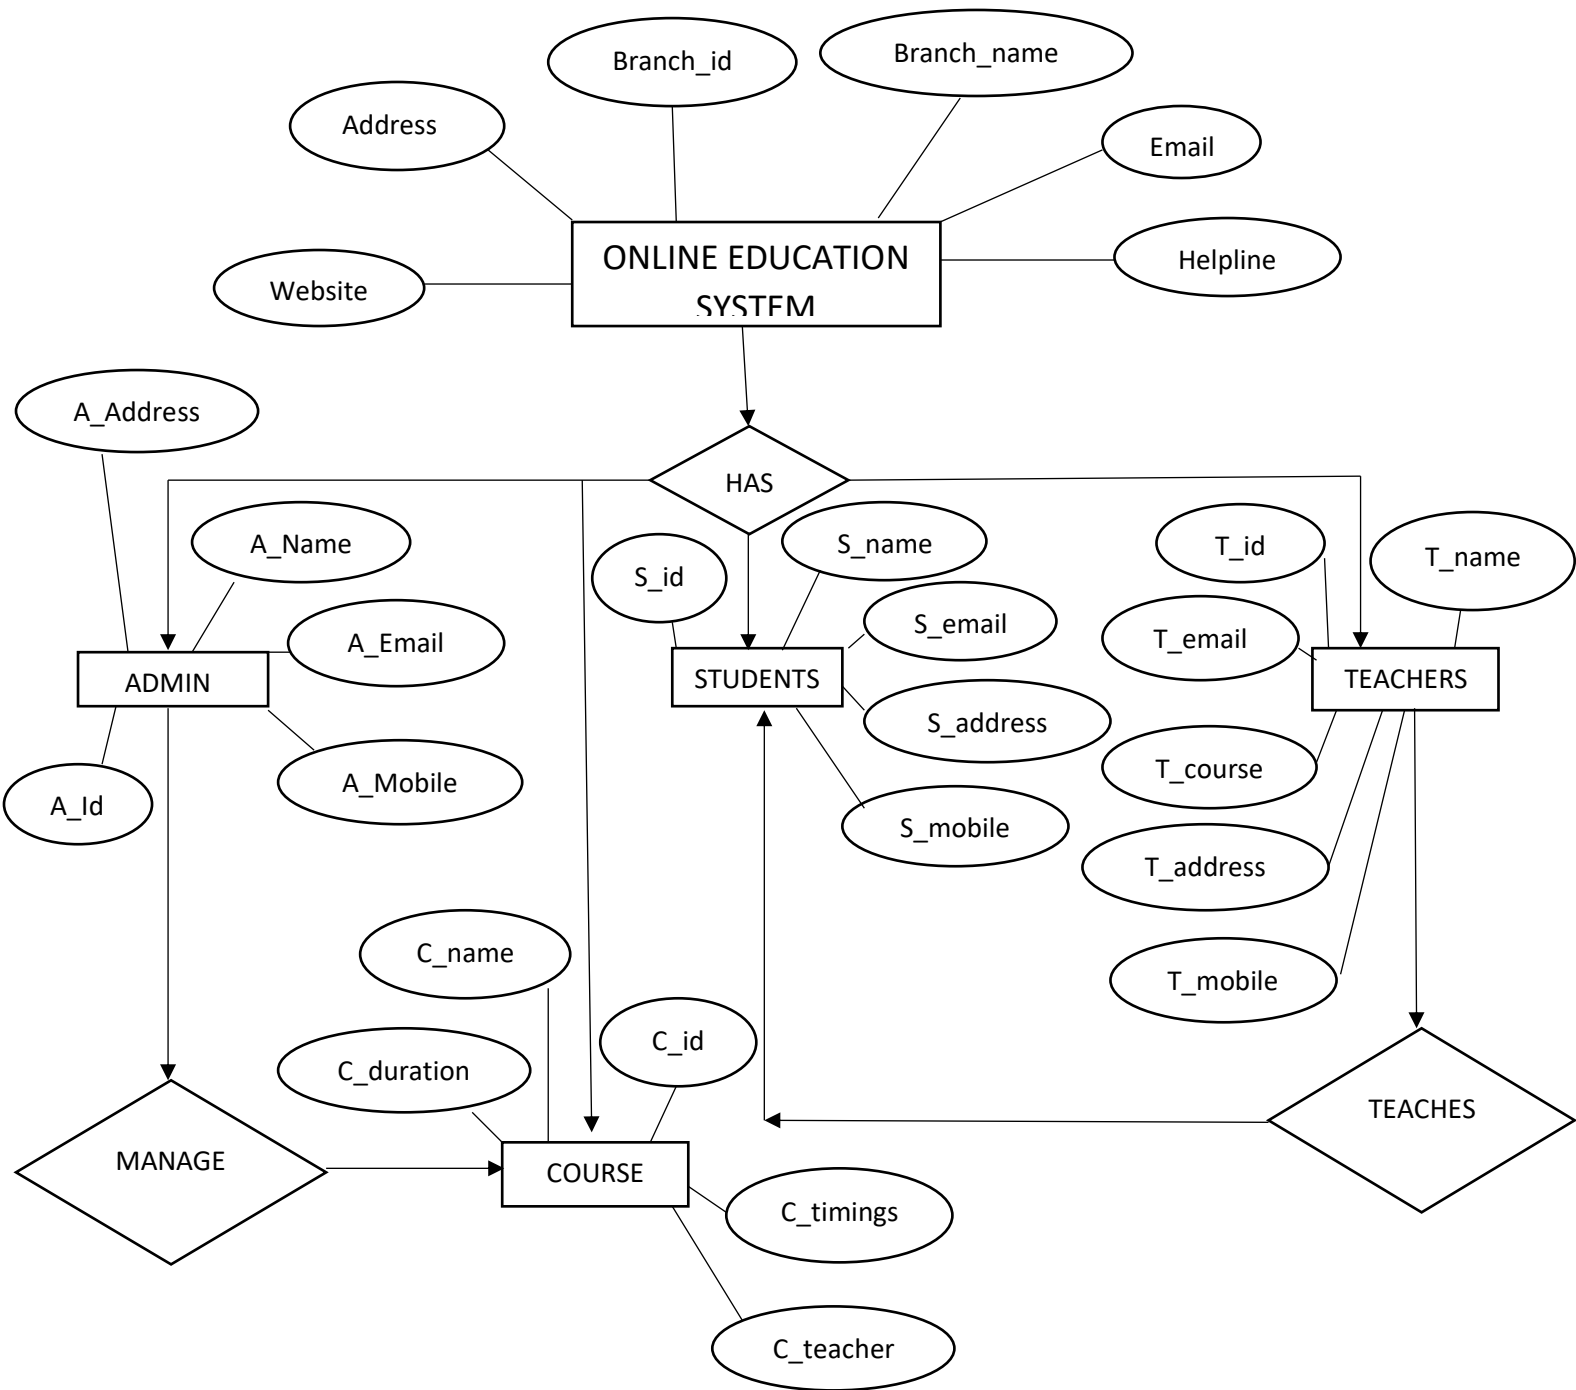


**ENTITY RELATIONSHIP DIAGRAM**

# IMPLEMENTATION

The module data is stored in the database. It can be access only by the user who is having excess permission. Access control module also give security to all the website modules. Security refers to the protection of data against unauthorised access, alteration. Security measures to the propsed system at different levels. It provides high security, a client can modify only permitted areas. Primary key validation is used in this project. Password protection is provided and otp provided at the web or application level.


## DATA DICTIONARY

### USER SIGN-IN LIST

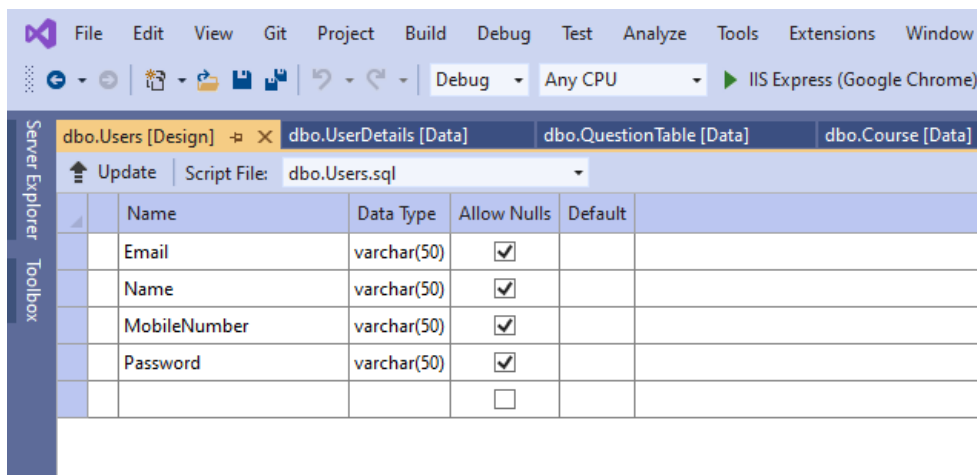


	Name	Data Type	Allow Nulls	Default	
	Email	varchar(50)	<input checked="" type="checkbox"/>		
	Name	varchar(50)	<input checked="" type="checkbox"/>		
	MobileNumber	varchar(50)	<input checked="" type="checkbox"/>		
	Password	varchar(50)	<input checked="" type="checkbox"/>		
			<input type="checkbox"/>		

### USER LIST:

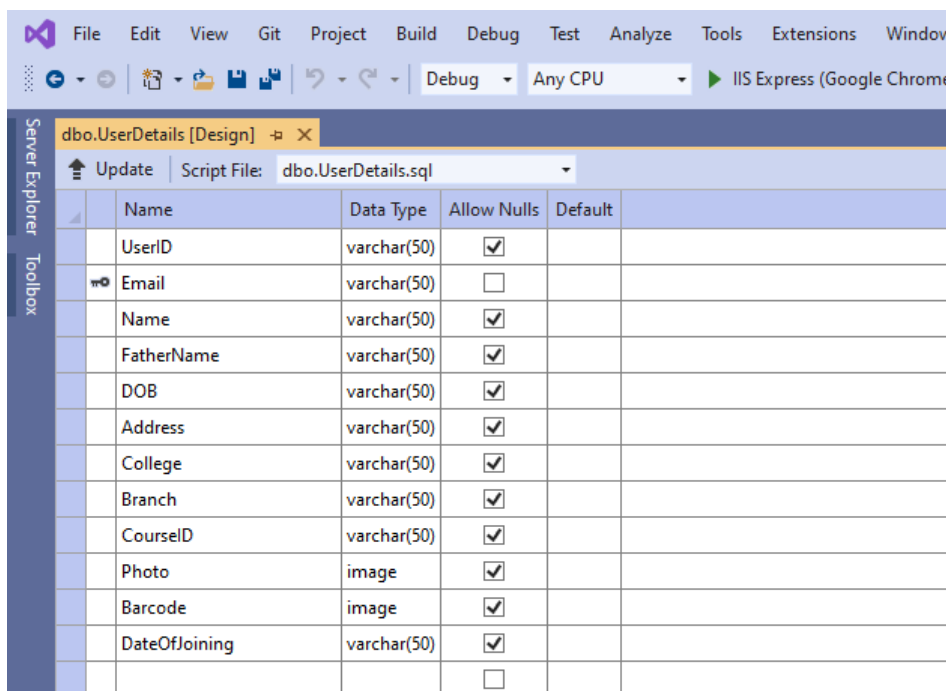

	Name	Data Type	Allow Nulls	Default	
	UserID	varchar(50)	<input checked="" type="checkbox"/>		
	Email	varchar(50)	<input type="checkbox"/>		
	Name	varchar(50)	<input checked="" type="checkbox"/>		
	FatherName	varchar(50)	<input checked="" type="checkbox"/>		
	DOB	varchar(50)	<input checked="" type="checkbox"/>		
	Address	varchar(50)	<input checked="" type="checkbox"/>		
	College	varchar(50)	<input checked="" type="checkbox"/>		
	Branch	varchar(50)	<input checked="" type="checkbox"/>		
	CourseID	varchar(50)	<input checked="" type="checkbox"/>		
	Photo	image	<input checked="" type="checkbox"/>		
	Barcode	image	<input checked="" type="checkbox"/>		
	DateOfJoining	varchar(50)	<input checked="" type="checkbox"/>		
			<input type="checkbox"/>		


## QUESTION TABLE:

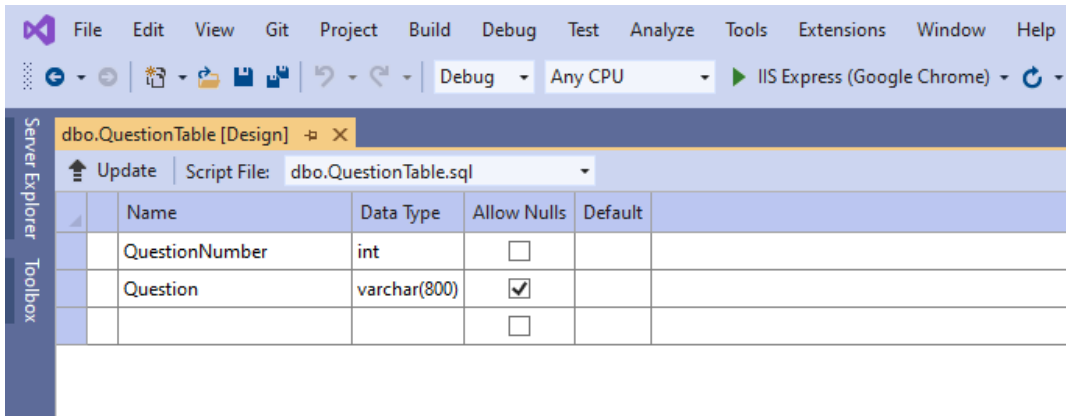

The screenshot shows the Visual Studio IDE with the 'dbo.QuestionTable [Design]' window open. The 'Script File' is 'dbo.QuestionTable.sql'. The table has three columns: 'QuestionNumber' (int, not null), 'Question' (varchar(800), nullable), and an unnamed column (int, not null). The 'Allow Nulls' checkbox is checked for the 'Question' column and unchecked for the others.

	Name	Data Type	Allow Nulls	Default
	QuestionNumber	int	<input type="checkbox"/>	
	Question	varchar(800)	<input checked="" type="checkbox"/>	
		int	<input type="checkbox"/>	


## COURSE LIST:

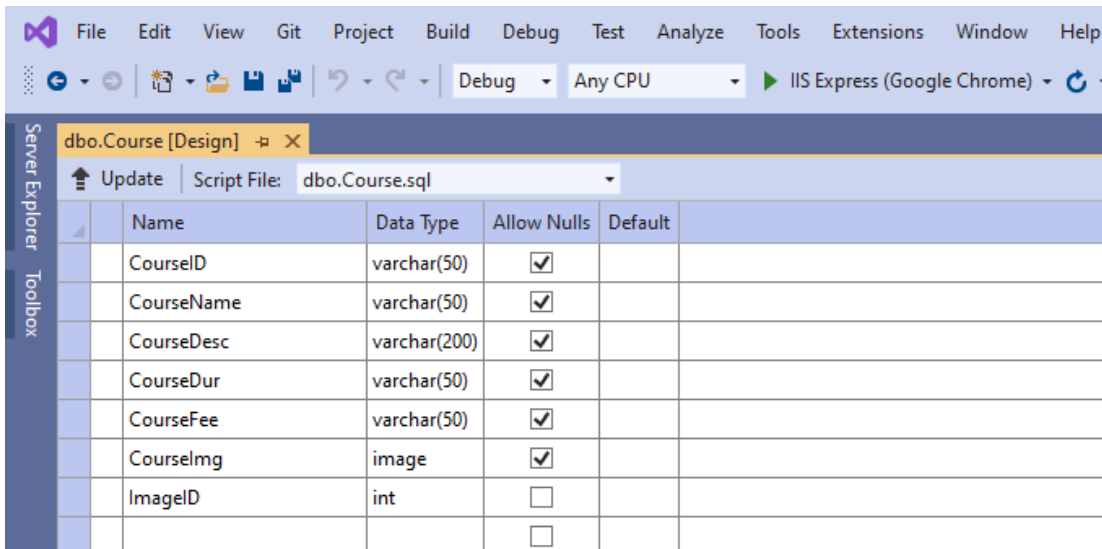

The screenshot shows the Visual Studio IDE with the 'dbo.Course [Design]' window open. The 'Script File' is 'dbo.Course.sql'. The table has seven columns: 'CourseID' (varchar(50), nullable), 'CourseName' (varchar(50), nullable), 'CourseDesc' (varchar(200), nullable), 'CourseDur' (varchar(50), nullable), 'CourseFee' (varchar(50), nullable), 'CourseImg' (image, nullable), and 'ImageID' (int, nullable). The 'Allow Nulls' checkbox is checked for all columns.

	Name	Data Type	Allow Nulls	Default
	CourseID	varchar(50)	<input checked="" type="checkbox"/>	
	CourseName	varchar(50)	<input checked="" type="checkbox"/>	
	CourseDesc	varchar(200)	<input checked="" type="checkbox"/>	
	CourseDur	varchar(50)	<input checked="" type="checkbox"/>	
	CourseFee	varchar(50)	<input checked="" type="checkbox"/>	
	CourseImg	image	<input checked="" type="checkbox"/>	
	ImageID	int	<input type="checkbox"/>	

## VIDEO LIST:

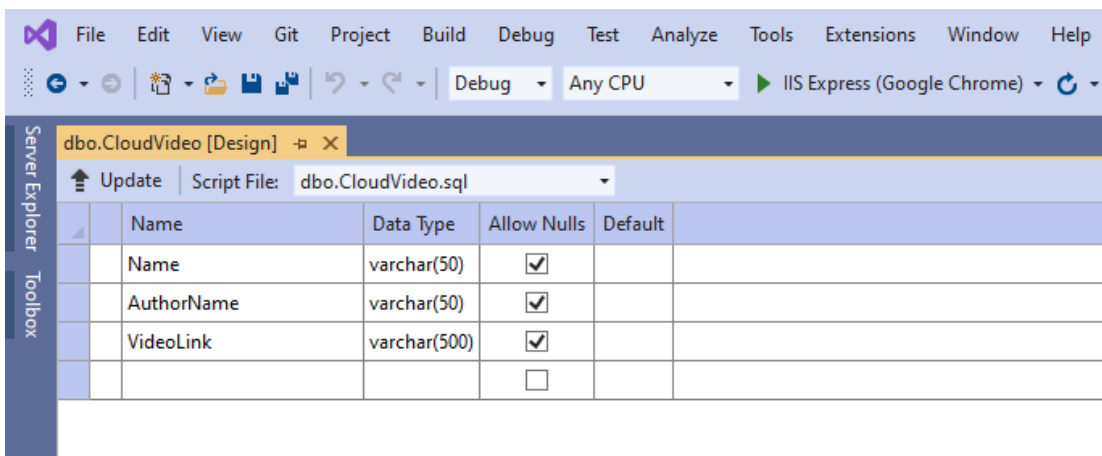

The screenshot shows the Visual Studio IDE with the 'dbo.CloudVideo [Design]' window open. The 'Script File' is 'dbo.CloudVideo.sql'. The table has three columns: 'Name' (varchar(50), nullable), 'AuthorName' (varchar(50), nullable), and 'VideoLink' (varchar(500), nullable). The 'Allow Nulls' checkbox is checked for all columns.

	Name	Data Type	Allow Nulls	Default
	Name	varchar(50)	<input checked="" type="checkbox"/>	
	AuthorName	varchar(50)	<input checked="" type="checkbox"/>	
	VideoLink	varchar(500)	<input checked="" type="checkbox"/>	

CLOUD PDF TABLE:

FileEditViewGitProjectBuildDebugTestAnalyzeToolsExtensionsWindowHelpSearch (Ctrl+K)

DebugAny CPUIIS Express (Google Chrome)

Server ExplorerToolbox

dbo.CloudPDF [Design] ×

dbo.CloudVideo [Design]


UpdateScript File: dbo.CloudPDF.sql

	Name	Data Type	Allow Nulls	Default	
	id	int	<input type="checkbox"/>		
	Name	varchar(100)	<input checked="" type="checkbox"/>		
	ContentType	varchar(50)	<input checked="" type="checkbox"/>		
	Data	varbinary(MAX)	<input checked="" type="checkbox"/>		
	Topic	varchar(50)	<input checked="" type="checkbox"/>		
			<input type="checkbox"/>		



# I/O WITH SOURCE CODE

## HOME PAGE

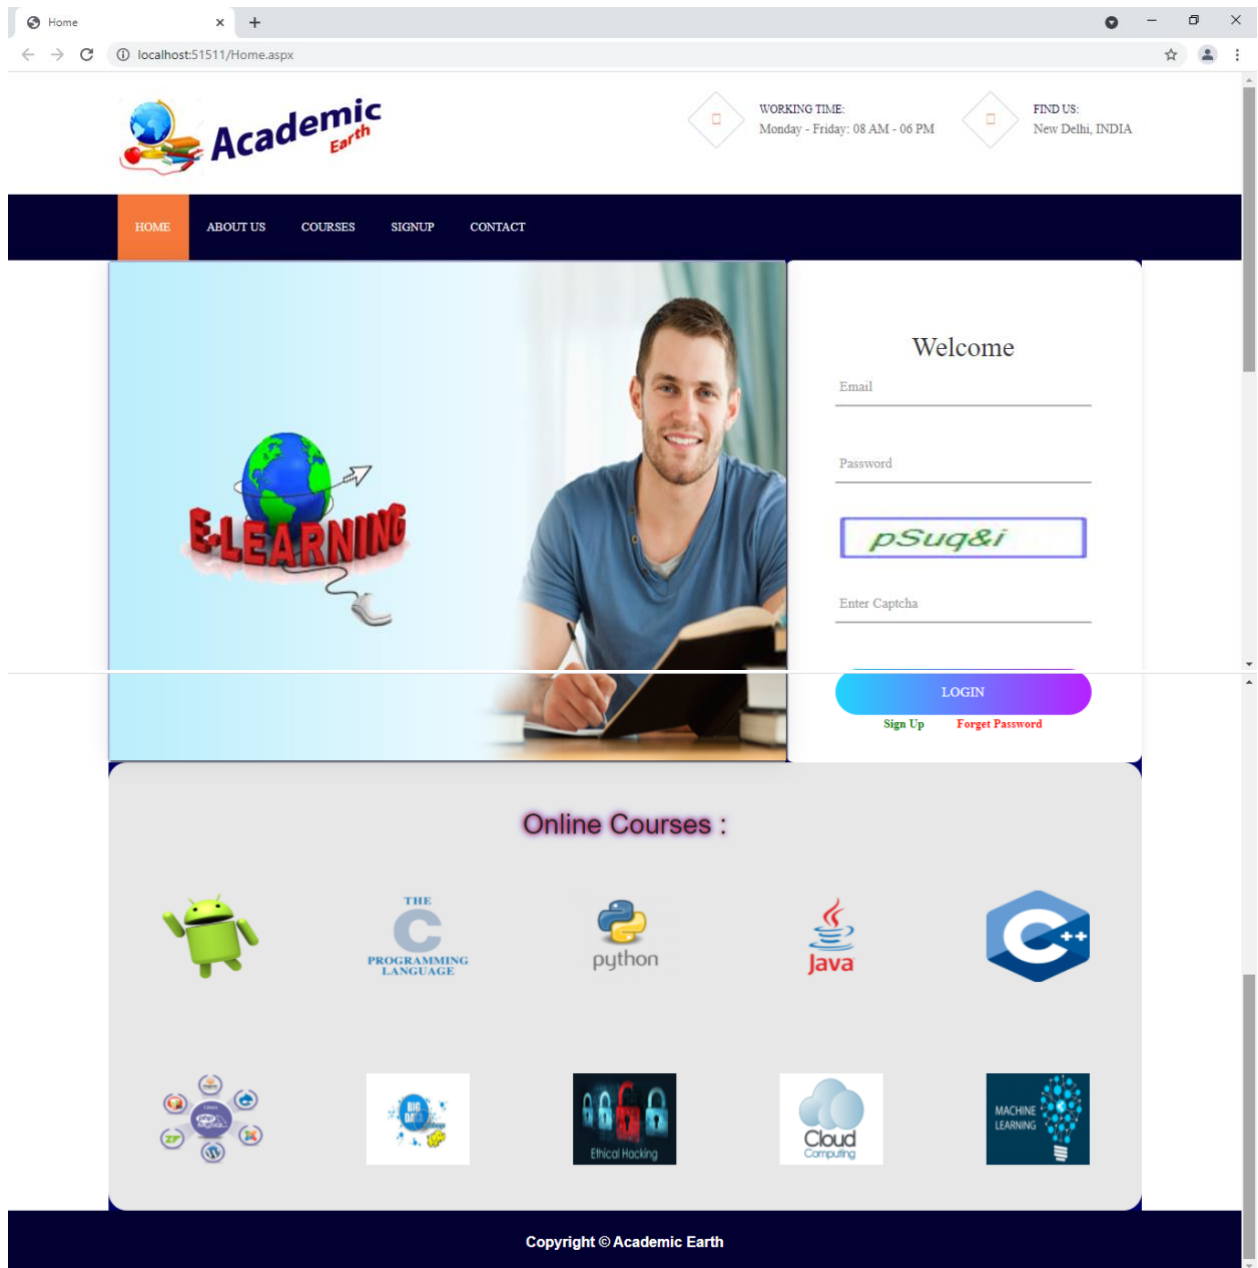

## **HTML CODE OF HOME PAGE**

```
<%@ Page Language="C#" AutoEventWireup="true" CodeFile="Home.aspx.cs"
Inherits="Scripts_Home" %>
```

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title>Home</title>
    <link href="Styles/bootstrap.min.css" rel="stylesheet" type="text/css" />
    <link href="Styles/style.css" rel="stylesheet" type="text/css" />
    <link href="Styles/font-awesome.min.css" rel="stylesheet" type="text/css" />
    <link href="Styles/Banner.css" rel="stylesheet" type="text/css" />
    <link href="Styles/themify-icons.css" rel="stylesheet" type="text/css" />
    <link href="Styles/magnific-popup.css" rel="stylesheet" type="text/css" />
    <link href="Styles/main.css" rel="stylesheet" type="text/css" />
    <script src="Scripts/jquery-1.9.1.min.js" type="text/javascript"></script>
    <script src="Scripts/jssor.js" type="text/javascript"></script>
    <script src="Scripts/jssor.slider.js" type="text/javascript"></script>
    <script src="Scripts/Slide.js" type="text/javascript"></script>
</head>
```

```
<body>
    <form id="form1" runat="server">
        <table width="100%">
            <tr>
                <td>
                    <div class="header-section">
                        <div class="container">
                            <a href="Home.aspx" class="site-logo"></a>
                            <div class="nav-switch">
                                <i class="fa fa-bars"></i>
                            </div>
                            <div class="header-info">
                                <div class="hf-item">
                                    <i class="fa fa-clock-o"></i>
                                    <p><span>Working time:</span>Monday - Friday: 08 AM - 06 PM</p>
```

```

</div>
<div class="hf-item">
<i class="fa fa-map-marker"></i>
<p><span>Find us:</span>New Delhi, INDIA</p>
</div>
</div>
</div>
</div>

<div class="nav-section">

<div class="container">
<ul class="main-menu">
<li class="active"><a href="Home.aspx">Home</a></li>
<li><a href="Aboutus.aspx">About Us</a></li>
<li><a href="Courses.aspx">COURSES</a></li>
<li><a href="Signup.aspx">SignUp</a></li>
<li><a href="Contact.aspx">Contact</a></li>
</ul>
</div>
</div>
</td>
</tr>
<tr>
<td align="center">
<table width="74%">
<tr>
<td style="width: 65%">
<div id="slider1_container" style="position: relative; width: 740px; box-shadow: 1px
1px 2px black, 0 0 25px rgba(0, 0, 0, 0.1), 0 0 3px darkblue; height: 545px; overflow:
hidden; top: 0px; left: 1px;">

<div u="slides" style="cursor: move; position: absolute; left: 0px; top: 0px; width:
740px; height:545px;overflow: hidden;">

<div>
<asp:Image ID="Image1" runat="server" ImageUrl="~/SliderImages/img7.jpg"
Height="545" Width="820"></asp:Image>
</div>

<div>

```

```

<asp:Image ID="Image2" runat="server" ImageUrl="~/SliderImages/img2.jpg"
Height="545" Width="800"></asp:Image>
</div>
<div>
<asp:Image ID="Image3" runat="server" ImageUrl="~/SliderImages/img3.jpg"
Height="545" Width="800"></asp:Image>
</div>

<div>
<asp:Image ID="Image4" runat="server" ImageUrl="~/SliderImages/img4.jpg"
Height="545" Width="800"></asp:Image>
</div>

<div>
<asp:Image ID="Image5" runat="server" ImageUrl="~/SliderImages/img5.jpg"
Height="545" Width="800"></asp:Image>
</div>

<div>
<asp:Image ID="Image6" runat="server" ImageUrl="~/SliderImages/img6.jpg"
Height="545" Width="800"></asp:Image>
</div>

<div>
<asp:Image ID="Image7" runat="server" ImageUrl="~/SliderImages/img1.png"
Height="545" Width="800"></asp:Image>
</div>
</div>
</div>
</td>

<td width="35%" bgcolor="#000066">
<div class="wrap-login100">
<span class="login100-form-title p-b-26">Welcome</span>
<div class="wrap-input100 validate-input" data-validate = "Valid email is: a@b.c">
<asp:TextBox ID="TextBox2" class="input100" runat="server"
ontextchanged="TextBox2_TextChanged"></asp:TextBox>
<span class="focus-input100" data-placeholder="Email"></span>
</div>
<div class="wrap-input100 validate-input" data-validate="Enter password">

```

```
<span class="btn-show-pass"><i class="zmdi zmdi-eye"></i></span>
<asp:TextBox ID="TextBox1" class="input100" runat="server" MaxLength="10"
TextMode="Password" ontextchanged="TextBox1_TextChanged"></asp:TextBox>
<span class="focus-input100" data-placeholder="Password"></span></div>
<div><asp:Image ID="Image8" runat="server"
class="input100"></asp:Image></div><br />
<div class="wrap-input100 validate-input" data-validate="Enter password">
<span class="btn-show-pass"><i class="zmdi zmdi-eye"></i></span>
<asp:TextBox ID="TextBox4" class="input100" runat="server" MaxLength="10"
ontextchanged="TextBox4_TextChanged"></asp:TextBox>
<span class="focus-input100" data-placeholder="Enter Captcha"></span></div>

<div class="container-login100-form-btn">
<div class="wrap-login100-form-btn">
<div class="login100-form-bgbtn"></div>
<asp:Button ID="Button1" runat="server" Text="Login" class="login100-form-btn"
BackColor="Transparent" onclick="Button1_Click"></asp:Button>
</div>
</div>

<div class="text-center p-t-115">
<a class="txt2" href="Signup.aspx"><font color="green"><b>Sign Up</b></font>
</a>
<span class="txt1">&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</span>
<a class="txt2" href="ForgetPassword.aspx">
<font color="red"><b>Forget Password</b></font>
</a>
</div>
</div>
</td>
</tr>

<tr><td colspan="2" height="" align="center">
<table border="0px" height="100%" width="100%" bgcolor="#000066">
<tr>
<td width="60%" style="border-left-style: solid; border-width: 0px; border-left-color:
#000080">
<table height="100%" width="100%">
<td height="95%" align="center" style="background-image:
url('Courses/Cousjse.jpg'); background-repeat: no-repeat; background-size: 70%70%;
background-position: center center;border-radius: 20px;">
```

```

<table width="100%" border="0px" bgcolor="#E8E7E7" style="border-radius: 20px">
  <tr>
    <td colspan="5" height="30px" align="center" style="background-color: Sliver; text-
shadow: 0 0 5px #FF0000, 0 0 8px #0000FF; font-size: 30px;"><br />Online Courses :
  </td></tr>
  <tr>
    <td width="20%" height="200px" class="pac" style="background-position: center
center; background-image: url('Courses/android.png'); background-repeat: no-repeat;
background-size: 50%50%;"></td>
    <td width="20%" height="200px" class="pac" style="background-position: center
center; background-image: url('Courses/c.png'); background-repeat: no-repeat;
background-size: 50%50%;"></td>
    <td width="20%" height="200px" class="pac" style="background-position: center
center; background-image: url('Courses/pythen.png'); background-repeat: no-repeat;
background-size: 50%50%;"></td>
    <td width="20%" height="200px" class="pac" style="background-position: center
center; background-image: url('Courses/java.png'); background-repeat: no-repeat;
background-size: 50%50%;"></td>
    <td width="20%" height="200px" class="pac" style="background-position: center
center; background-image: url('Courses/tcc.png'); background-repeat: no-repeat;
background-size: 50%50%;"></td>
  </tr>
  <tr>
    <td width="20%" height="200px" class="pac" style="background-position: center
center; background-image: url('Courses/php.png'); background-repeat: no-repeat;
background-size: 50%50%;"></td>
    <td width="20%" height="200px" class="pac" style="background-position: center
center; background-image: url('Courses/bigdata.png'); background-repeat: no-repeat;
background-size: 50%50%;"></td>
    <td width="20%" height="200px" class="pac" style="background-position: center
center; background-image: url('Courses/ethical.jpg'); background-repeat: no-repeat;
background-size: 50%50%;"></td>
    <td width="20%" height="200px" class="pac" style="background-position: center
center; background-image: url('Courses/cloud.png'); background-repeat: no-repeat;
background-size: 50%50%;"></td>
    <td width="20%" height="200px" class="pac" style="background-position: center
center; background-image: url('Courses/Machine.jpeg'); background-repeat: no-
repeat; background-size: 50%50%;"></td>
  </tr>
</table>
</td>

```

```

</tr>
</table>
</td>
</tr>
</table>
</td>
</tr>
</table>
</td>
</tr>

<tr>
<td class="mainfooter" bgcolor="#020031" style="border-style: 1; height: 70px; color:
#FFFFFF; text-align: center; background-image: url('img/footer-bg.png'); background-
repeat: no-repeat; background-size: 30%100%; background-position: center 5px;">
<table width="100%" height="100%">
<tr><td height="20%"><b>Copyright &copy; Academic Earth</b>
</td>
</tr>
</table>
</td>
</tr>
</table>
</form>
</body>
</html>

```

## **C# CODE OF HOME PAGE**

```
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data.SqlClient;
using System.Text;

public partial class Scripts_Home : System.Web.UI.Page
{
    SqlConnection con;
    SqlCommand cmd;
    SqlDataReader dtr;
    public string cs =
System.Configuration.ConfigurationManager.ConnectionStrings["AcademicEarth"].Co
nnectionString;
    string u;
    string p;
    protected void Page_Load(object sender, EventArgs e)
    {
        con = new System.Data.SqlClient.SqlConnection(cs);
        con.Open();
        if (!IsPostBack)
        {
            FillCaptha(Image8);
        }
    }
}

void FillCaptha(Image img)
{
    try
    {
        Random random = new Random();
        string combination =
"0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz"
;
        StringBuilder captcha = new StringBuilder();
        for (int i = 0; i < 6; i++)
```



```

        captcha.Append(combination[random.Next(combination.Length)]);
        Session["captcha"] = captcha.ToString();
        img.ImageUrl = "GenerateCaptche.aspx?" + DateTime.Now.Ticks.ToString();
    }

    catch
    {
        throw;
    }
}

protected void Button1_Click(object sender, EventArgs e)
{
    if (Session["captcha"].ToString() != TextBox4.Text)
        Response.Write("<script LANGUAGE='JavaScript' >alert('Enter Valid Code in Below Text')</script>");

    else
    {
        cmd = new System.Data.SqlClient.SqlCommand("Select Email,Password from Users where Email=' " + TextBox2.Text + " ' And Password=' " + TextBox1.Text + " '", con);
        dtr = cmd.ExecuteReader();
        if (dtr.Read())
        {
            u = TextBox2.Text;
            p = TextBox1.Text;
            Session.Add("u1", u);
            Session.Add("p1", p);
            Response.Redirect("YourProfile.aspx");
        }

        else
        {
            if (TextBox2.Text == "Sawan" )
            {
                if (TextBox1.Text == "Sawan" )
                {
                    Response.Redirect("AdminFirst.aspx");
                }
            }
            else
        }
    }
}

```

```

        TextBox2.Text = "";
        TextBox1.Text = "";
        Response.Write("<script LANGUAGE='JavaScript' >alert('Login Failed !
Wrong UserName Or Password')</script>");

    }

}
else
{
    TextBox2.Text = "";
    TextBox1.Text = "";
    Response.Write("<script LANGUAGE='JavaScript' >alert('Login Failed !
Wrong UserName Or Password')</script>");

}
}
FillCaptha(Image8);
}
}
protected void TextBox1_TextChanged(object sender, EventArgs e)
{


}
protected void TextBox4_TextChanged(object sender, EventArgs e)
{

}
protected void TextBox2_TextChanged(object sender, EventArgs e)
{

}
}
}

```

# ABOUTS US

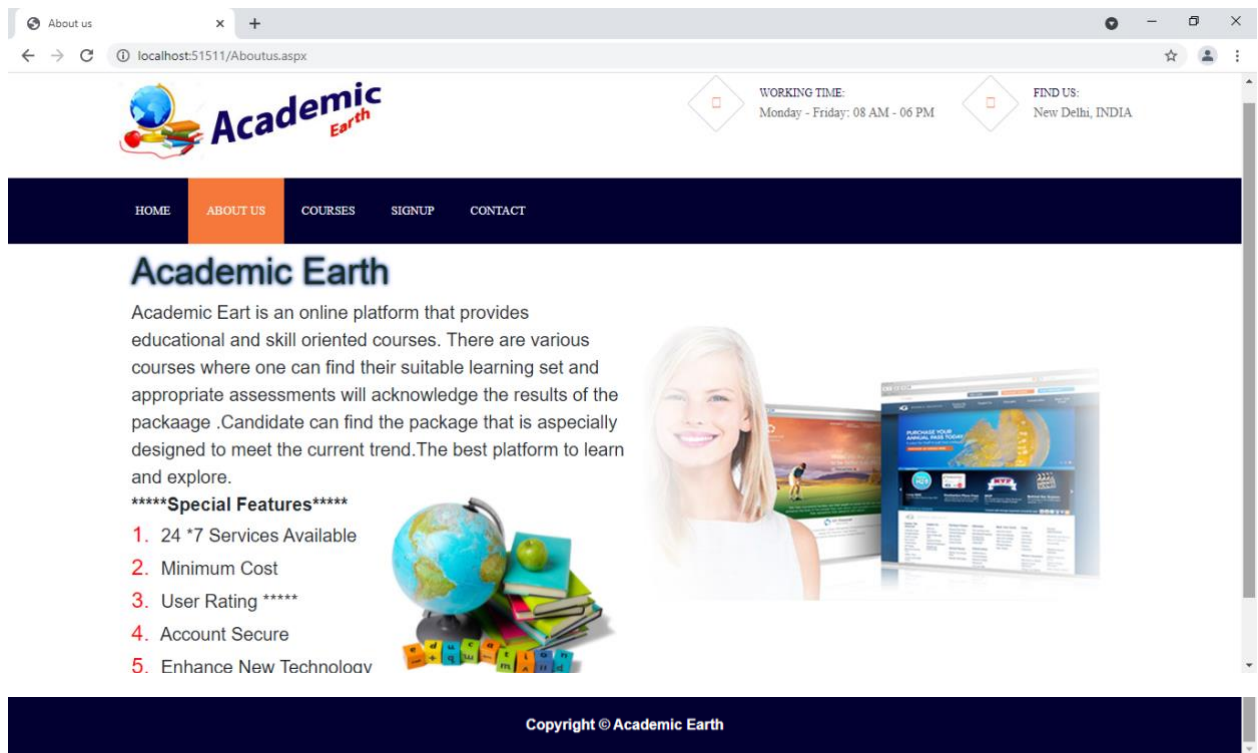

## HTML CODE

```
<%@ Page Language="C#" AutoEventWireup="true" CodeFile="Aboutus.aspx.cs"
Inherits="Aboutus" %>
```

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
<head id="Head1" runat="server">
    <title>About us</title>
    <link href="Styles/bootstrap.min.css" rel="stylesheet" type="text/css" />
    <link href="Styles/style.css" rel="stylesheet" type="text/css" />
    <link href="Styles/font-awesome.min.css" rel="stylesheet" type="text/css" />
    <link rel="stylesheet" type="text/css" href="Styles/main.css" />
    <link href="Styles/Banner.css" rel="stylesheet" type="text/css" />
    <script src="Scripts/jquery-1.9.1.min.js" type="text/javascript"></script>
    <script src="Scripts/jssor.js" type="text/javascript"></script>
    <script src="Scripts/jssor.slider.js" type="text/javascript"></script>
    <script src="Scripts/Slide.js" type="text/javascript"></script>
```

```

</head>

<body>
  <form id="form1" runat="server">
    <table width="100%">
      <tr><td>
        <div class="header-section">
          <div class="container">
            <a href="Home.aspx" class="site-logo"> </a>
              <div class="nav-switch">
                <i class="fa fa-bars"></i></div>
              <div class="header-info">
                <div class="hf-item">
                  <i class="fa fa-clock-o"></i>
<p><span>Working time:</span>Monday - Friday: 08 AM - 06 PM</p></div>
                <div class="hf-item">
                  <i class="fa fa-map-marker"></i>
                  <p><span>Find us:</span>New Delhi, INDIA</p>
                </div></div></div></div>

            <div class="nav-section">
              <div class="container">
                <ul class="main-menu">
<li><a href="Home.aspx">Home</a></li>
<li class="active"><a href="Aboutus.aspx">About Us</a></li>
<li><a href="Courses.aspx">COURSES</a></li>
<li><a href="Signup.aspx">SignUp</a></li>
<li><a href="Contact.aspx">Contact</a></li>
                </ul>
              </div>
            </div>
          </td>
        </tr>
      <tr><td align="center" ><table width="80%" style="height: ">
        <tr><td><table width="100%">
          <tr><td width="50%"><table width="100%">
            <tr><td style="text-shadow: 0 0 3px green, 0 0 5px blue;font-size: 40px;"> Academic
Earth</td></tr>
            <tr><td width="100%" style="background-position: right bottom; background-size:
50%50%; height: 300px; font-size: 20px; background-image: url('img/Aboutus2.jpg');
background-repeat: no-repeat;">Academic Earth is an online platform that provides

```

educational and skill oriented courses. There are various courses where one can find their suitable learning set and appropriate assessments will acknowledge the results of the package. Candidate can find the package that is especially designed to meet the current trend. The best platform to learn and explore. <br />

<b>\*\*\*\*\*Special Features\*\*\*\*\*</b><br />

<font color="red" size="5px">1.&nbsp;</font> 24 \*7 Services Available<br />

<font color="red" size="5px">2.&nbsp;</font> Minimum Cost<br />

<font color="red" size="5px">3.&nbsp;</font> User Rating \*\*\*\*\*<br />

<font color="red" size="5px">4.&nbsp;</font> Account Secure<br />

<font color="red" size="5px">5.&nbsp;</font> Enhance New Technology</td>

</tr>

</table>

</td>

<td width="50%" style="background-image: url('major/s3.png'); background-position: center center; background-repeat: no repeat"></td>

</tr>

</table>

</td>

</tr>

</table>

</td>

</tr>

<tr>

<td class="mainfooter" bgcolor="#020031" style="border-style: 1; height: 70px; color: #FFFFFF; text-align: center; background-image: url('img/footer-bg.png'); background-repeat: no-repeat; background-size: 30%100%; background-position: center 5px;">

<table width="100%" height="100%">

<tr><td height="20%"><b>Copyright &copy; Academic Earth</b>

</td>

</tr>

</table>

</td>

</tr>

</table>

</form>

</body>

</html>

## SIGN UP

Sign Up

localhost:51511/signup.aspx

**Academic Earth**

WORKING TIME: Monday - Friday: 08 AM - 06 PM

FOOD US: New Delhi, INDIA

HOME ABOUT US COURSES **SIGNUP** CONTACT

**Sign Up Yourself**

Enter Email

Enter Name

Enter Mobile Number

Enter Password

Enter Confirm Password

Submit

Copyright © Academic Earth

## HTML CODE

```
<%@ Page Language="C#" AutoEventWireup="true"
CodeFile="Signup.aspx.cs" Inherits="Signup" %>
```

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
<head id="Head1" runat="server">
    <title>Sign Up</title>
    <link href="Styles/bootstrap.min.css" rel="stylesheet" type="text/css" />
    <link href="Styles/style.css" rel="stylesheet" type="text/css" />
    <link href="Styles/font-awesome.min.css" rel="stylesheet" type="text/css" />
    <link rel="stylesheet" type="text/css" href="Styles/main.css" />
    <link href="Styles/Banner.css" rel="stylesheet" type="text/css" />
    <script src="Scripts/jquery-1.9.1.min.js" type="text/javascript"></script>
    <script src="Scripts/jssor.js" type="text/javascript"></script>
    <script src="Scripts/jssor.slider.js" type="text/javascript"></script>
```

```
<script src="Scripts/Slide.js" type="text/javascript"></script>
<style type="text/css">
.inputname{
    width: 80%;
    padding: 12px 20px;
    margin: 8px 0;
    display: inline-block;
    border: 1px solid #ccc;
    border-radius: 20px;
    box-sizing: border-box;
}
.inputname:hover {

}
.button {
    background-color: blue;
    border: none;
    color: #FFFFFF;
    text-align: center;
    font-size: 15px;
    padding: 10px;
    width: 250px;
    border-radius: 40px;
    transition: all 4s;
    cursor: pointer;
    margin: 5px;
}

.button span {
    cursor: pointer;
    display: inline-block;
    position: relative;
    transition: 0.5s;
}

.button span:after {
    content: '\00bb';
    position: absolute;
    opacity: 0;
    top: 0;
    right: -20px;
}
```

```

    transition: 0.5s;
}

.button:hover span {
    padding-right: 25px;
}

.button:hover span:after {
    opacity: 1;
    right: 0;
}</style>
</head>
<body>

    <form id="form1" runat="server">
    <table width="100%">
    <tr><td>
        <div class="header-section">
            <div class="container">

                <a href="Home.aspx" class="site-logo"></a>

                <div class="nav-switch">
                    <i class="fa fa-bars"></i></div>
                <div class="header-info">
                    <div class="hf-item">
                        <i class="fa fa-clock-o"></i>
<p><span>Working time:</span>Monday - Friday: 08 AM - 06 PM</p></div>
                    <div class="hf-item">
                        <i class="fa fa-map-marker"></i>
                        <p><span>Find us:</span>New Delhi,
INDIA</p></div></div></div></div>
                    <div class="nav-section">
                        <div class="container">
                            <ul class="main-menu">
                                <li><a href="Home.aspx">Home</a></li>
                                <li><a href="Aboutus.aspx">About Us</a></li>
                                <li><a href="Courses.aspx">COURSES</a></li>
                                <li class="active"><a href="Signup.aspx">SignUp</a></li>
                                <li><a href="Contact.aspx">Contact</a></li>
                            </ul>

```



```

</div>
</div>
</td>
</tr>

<tr>
<td align="center" ><table width="80%" style="height: " >
<tr>
<td width="50%" align="center" style="background-position: center center;
background-size: 100%100%; background-image: url('major/s7.png'); background-
size: 100%100%; background-repeat: no-repeat; background-attachment: ;"></td>

<td width="50%" align="center" style="border-radius: 20px; box-shadow: 1px 2px 7px
rgba(0, 0, 0, .5);"><table style="background-image: url('major/sjj2.png'); background-
size: 100%100%; background-position: center bottom; background-repeat: no-repeat;
width: 100%;">
<tr>
<td style="font-size: xx-large; font-weight: bold; background-color: #FF0000; color:
#FFFFFF;" align="center">Sign Up Yourself</td></tr>
<tr>
<td align="center"><asp:TextBox ID="TextBox1" runat="server" class="inputname"
Placeholder="Enter Email"></asp:TextBox><br /><asp:RequiredFieldValidator
ID="RequiredFieldValidator1" runat="server" ControlToValidate="TextBox1"
ErrorMessage="* Enter your Email" Font-Size="Small"
ForeColor="Red"></asp:RequiredFieldValidator></td></tr>

<tr><td align="center"><asp:TextBox ID="TextBox2" runat="server"
class="inputname" Placeholder="Enter Name"></asp:TextBox><br
/><asp:RequiredFieldValidator ID="RequiredFieldValidator5" runat="server"
ControlToValidate="TextBox2" ErrorMessage="* Enter your Name" Font-Size="Small"
ForeColor="Red"></asp:RequiredFieldValidator></td></tr>

<tr><td align="center"><asp:TextBox ID="TextBox3" runat="server"
class="inputname" Placeholder="Enter Mobile Number"></asp:TextBox><br
/><asp:RequiredFieldValidator ID="RequiredFieldValidator3" runat="server"
ControlToValidate="TextBox3" ErrorMessage="* Enter Mobile No" Font-Size="Small"
ForeColor="Red"></asp:RequiredFieldValidator><br
/><asp:RegularExpressionValidator ID="RegularExpressionValidator1" runat="server"
ControlToValidate="TextBox3" ErrorMessage="* Enter valid Mobile No" Font-
Size="Small" ForeColor="Red" ValidationExpression="(\d{3})|\d{3}-
)?\d{10}"></asp:RegularExpressionValidator>

```

```

</td></tr>
    <tr><td align="center"><asp:TextBox ID="TextBox4" runat="server"
class="inputname" Placeholder="Enter Password"
TextMode="Password"></asp:TextBox><br />
    <asp:RequiredFieldValidator ID="RequiredFieldValidator4" runat="server"
ControlToValidate="TextBox4" ErrorMessage="* Enter Password" Font-Size="Small"
ForeColor="Red"></asp:RequiredFieldValidator>td></tr>

<tr><td align="center"><asp:TextBox ID="TextBox5" runat="server"
class="inputname"
Placeholder="Enter Confirm Password" TextMode="Password"></asp:TextBox><br />
<asp:CompareValidator ID="CompareValidator1" runat="server"
ControlToCompare="TextBox4" ControlToValidate="TextBox5" ErrorMessage="*
Password doesn't match" Font-Size="Small"
ForeColor="Red"></asp:CompareValidator></td></tr>
    <tr><td></td></tr>

    <tr><td align="center" ><asp:Button ID="Button1" runat="server" Text="Submit"
    class="button" onclick="Button1_Click"></asp:Button></td></tr>
</table></td></tr></table></td></tr>

<tr><td class="mainfooter" bgcolor="#020031" style="border-style: 1; height: 70px;
color: #FFFFFF; text-align: center; background-image: url('img/footer-bg.png');
background-repeat: no-repeat; background-size: 30%100%; background-position:
center 5px;"> <table width="100%" height="100%"><tr><td
height="20%"><b>Copyright &copy; Academic Earth</td>
</tr>
</table>
</form>
</body>
</html>

```

## **C# SOURCE CODE OF SIGN UP**

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data.SqlClient;

public partial class Signup : System.Web.UI.Page
{
    SqlConnection con;
    SqlCommand cmd;
    SqlCommand cmd1;
    string u,n;
    public string cs =
System.Configuration.ConfigurationManager.ConnectionStrings["AcademicEarth"].Co
nnectionString;

    protected void Page_Load(object sender, EventArgs e)
    {
        con = new System.Data.SqlClient.SqlConnection(cs);
        con.Open();
    }
    protected void Button1_Click(object sender, EventArgs e)
    {
        try
        {
            cmd = new SqlCommand("INSERT INTO Users Values (' " + TextBox1.Text.Trim()
+ " ',' " + TextBox2.Text.Trim() + " ',' " + TextBox3.Text.Trim() + " ',' " +
TextBox5.Text.Trim() + " ')", con);
            cmd.ExecuteNonQuery();
            cmd1 = new SqlCommand("INSERT INTO UserDetails (Email,Name) Values (' " +
TextBox1.Text.Trim() + " ',' " + TextBox2.Text.Trim() + " ')", con);
            cmd1.ExecuteNonQuery();
            u = TextBox1.Text;
            n = TextBox2.Text;
            TextBox1.Text = "";
            TextBox2.Text = "";
        }
    }
}
```

```
        TextBox3.Text = "";
        TextBox4.Text = "";
        TextBox5.Text = "";
        con.Close();
        Session.Add("u1", u);
        Session.Add("n1", n);
        Response.Redirect("CreateProfile.aspx");
    }
    catch {}
}

}
```

## ADMIN



## HTML CODE

```
<%@ Page Language="C#" AutoEventWireup="true" CodeFile="AdminFirst.aspx.cs"
Inherits="AdminFirst" %> <!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0
Transitional//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
  <title>Admin</title>
  <style type="text/css">
    .style1
    {
      height: 80px;
    }
    .style2
    {
      height: 30px;
      background-color: #00001a;
      border: 1px;
      color: #FFFFFF;
    }
    .style2:hover
    {
      height: 30px;
      background-color: red;
      border: 1px;
      color: #FFFFFF;
    }
  </style>
</head>
<body>
  <div style="height: 80px; width: 100%; background-color: #00001a; color: #FFFFFF; text-align: center; line-height: 80px;">
    Admin
  </div>
  <div style="height: 30px; width: 100%; background-color: #00001a; color: #FFFFFF; text-align: center; line-height: 30px;">
    Admin
  </div>
  <div style="height: 30px; width: 100%; background-color: red; color: #FFFFFF; text-align: center; line-height: 30px;">
    Admin
  </div>
</body>
</html>
```

```

    }
    .style3
    {
        height: 15px;
    }
    .style5
    {
        height: 310px;
    }
    .style6
    {
        height: 30px;
        align: center;
        color: White;
        background-color: #00001a;
    }
    a
    {
        text-decoration: none;
        color: #FFFFFF;
    }
    a:hover
    {
        text-decoration: none;
        background-color: red;
    }
</style></head>
<body>
    <form id="form1" runat="server">
    <center><table width="70%">
    <tr><td colspan="2" class="style1" style="background-position: center bottom;
background-image: url('img/logo.jpg'); background-repeat: no-repeat; background-
size: 100%100%"></td>
    <td colspan="3" class="style1"></td></tr> <tr><td colspan="5"
class="style3"></td></tr>
    <tr>
    <td width="20%" align="center" class="style2"><a
href="AdminFirst.aspx">Home</a></td>
    <td width="20%" align="center" class="style2"><a href="Upload.aspx">Upload
Info</a></td>


```

```

    <td width="20%" align="center" class="style2"><a href="Update.aspx">Update
Info</a></td>
    <td width="20%" align="center" class="style2"><a href="Delete.aspx">Delete
Info</a></td><td width="20%" align="center" class="style2"><asp:Button
ID="Button1" runat="server" Text="Logout" BackColor="Transparent"
ForeColor="#FFFFFF" BorderStyle="None"
onclick="Button1_Click"></asp:Button></td></tr>
<tr><td colspan="5" class="style5" style="background-image: url('img/portal.jpg');
background-position: center center; background-repeat: no-repeat; background-size:
90%90%"></td></tr>
<tr><td colspan="5" class="style6" align="center">All Right are reserved by Academic
Earth</td></tr>
</table></center></form></body></html>

```

# CONTACT

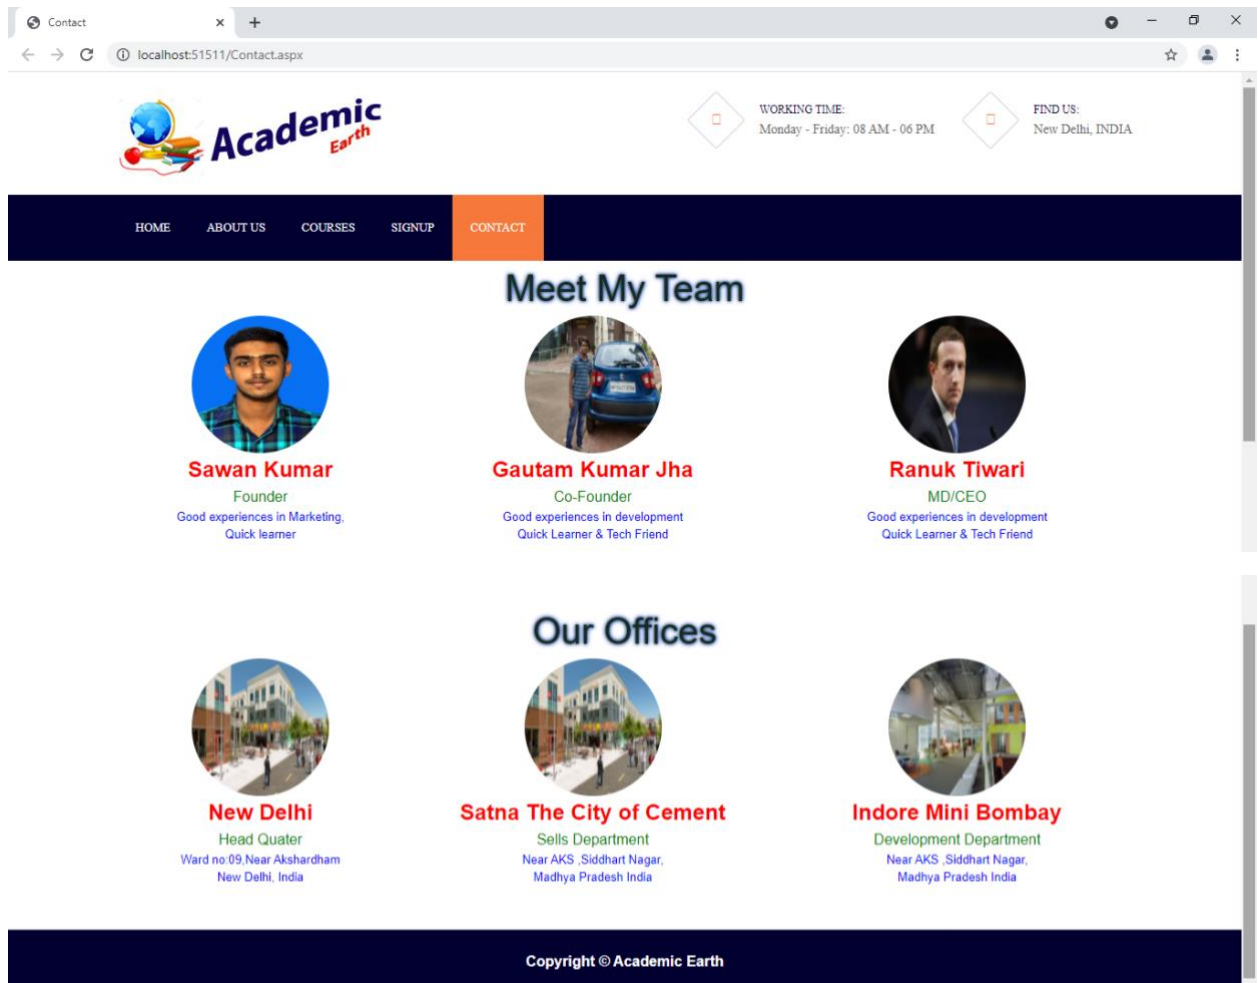

## HTML CODE

```
<%@ Page Language="C#" AutoEventWireup="true" CodeFile="Contact.aspx.cs" Inherits="Contact" %>
```

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
```

```
<head id="Head1" runat="server">
```

```
<title>Contact</title>
```

```
<link href="Styles/bootstrap.min.css" rel="stylesheet" type="text/css" />
```

```
<link href="Styles/style.css" rel="stylesheet" type="text/css" />
```

```
<link href="Styles/font-awesome.min.css" rel="stylesheet" type="text/css" />
```

```
<link rel="stylesheet" type="text/css" href="Styles/main.css" />
```



```
<link href="Styles/Banner.css" rel="stylesheet" type="text/css" />
<script src="Scripts/jquery-1.9.1.min.js" type="text/javascript"></script>
<script src="Scripts/jssor.js" type="text/javascript"></script>
<script src="Scripts/jssor.slider.js" type="text/javascript"></script>
<script src="Scripts/Slide.js" type="text/javascript"></script>
<style>
#sawan
{
    border-radius: 50%;
    width: 150px;
    height: 150px;
    background-size: 100%100%;
    background-position: center center;
    background-repeat: no-repeat;
}
#Rahul
{
    border-radius: 50%;
    width: 150px;
    height: 150px;
    background-size: 100%100%;
    background-position: center center;
    background-repeat: no-repeat;
}
#Gautam
{
    border-radius: 50%;
    width: 150px;
    height: 150px;
    background-size: 100%100%;
    background-position: center center;
    background-repeat: no-repeat;
}
#google
{
    border-radius: 50%;
    width: 150px;
    height: 150px;
    background-size: 100%100%;
    background-position: center center;
    background-repeat: no-repeat;
}
```

```

}
#fb
{
border-radius: 50%;
width: 150px;
height: 150px;
background-size: 100%100%;
background-position: center center;
background-repeat: no-repeat;
}
#ibm
{
border-radius: 50%;
width: 150px;
height: 150px;
background-size: 100%100%;
background-position: center center;
background-repeat: no-repeat;
}</style></head>
<body>
<form id="form1" runat="server">
<table width="100%">
<tr><td>
<div class="header-section">
<div class="container">
<a href="Home.aspx" class="site-logo"></a>

<div class="nav-switch">
<i class="fa fa-bars"></i></div>

<div class="header-info">
<div class="hf-item">
<i class="fa fa-clock-o"></i>
<p><span>Working time:</span>Monday - Friday: 08
AM - 06 PM</p></div>
<div class="hf-item">
<i class="fa fa-map-marker"></i>
<p><span>Find us:</span>New Delhi, INDIA</p>
</div></div></div></div>
<div class="nav-section">
<div class="container">

```

```

        <ul class="main-menu">
            <li><a href="Home.aspx">Home</a></li>
            <li><a href="Aboutus.aspx">About Us</a></li>
            <li><a href="Courses.aspx">COURSES</a></li>
            <li><a href="Signup.aspx">SignUp</a></li>
            <li class="active"><a href="Contact.aspx">Contact</a></li>
        </ul></div></div></td></tr>
    <tr><td align="center" ><table width="80%" style="height: ">
    <tr><td align="center"><table width="100%">
    <tr><td style="text-shadow: 0 0 3px green, 0 0 5px blue;font-size: 40px;"
    width="100%" colspan="3" align="center">Meet My Team</td></tr>
    <tr><td align="center"><div id="sawan" style="background-image:
    url('img/sawan.JPG')"></div></td>
    <td align="center"><div id="Gautam" style="background-image:
    url('img/gautam.jpeg')"></div></td>
    <td align="center"><div id="Rahul" style="background-image:
    url('img/mark.jpg')"></div></td></tr>
    <tr><td align="center"><div class="about">
    <font size="5px" color="red"><b>Sawan Kumar</b></font><br />
    <font size="3px" color="green">Founder</font><br />
    <font size="2px" color="blue">Good experiences in Marketing,<br /> Quick learner
    </font><br/></div></td>
    <td align="center"><div class="about">
    <font size="5px" color="red"><b>Gautam Kumar Jha</b></font><br />
    <font size="3px" color="green">Co-Founder</font><br />
    <font size="2px" color="blue">Good experiences in development <br />Quick
    Learner & Tech Friend</font><br /></div></td>
    <td align="center"><div class="about">
    <font size="5px" color="red"><b>Ranuk Tiwari</b></font><br />
    <font size="3px" color="green">MD/CEO</font><br />
    <font size="2px" color="blue">Good experiences in development <br />Quick
    Learner & Tech Friend</font><br /></div></td></tr>
    <tr><td style="text-shadow: 0 0 3px green, 0 0 5px blue;font-size: 40px;"
    width="100%" colspan="3" align="center"><br /><br />Our Offices</td></tr>
    <tr>
    <td align="center"><div id="google" style="background-image:
    url('img/facebook.jpg')"></div></td>
    <td align="center"><div id="fb" style="background-image:
    url('img/facebook.jpg')"></div></td>
    <td align="center"><div id="ibm" style="background-image:
    url('img/google.jpg')"></div></td>


```

```

</tr>
<tr>
<td align="center">
<div class="about">
<font size="5px" color="red"><b>New Delhi</b></font><br />
<font size="3px" color="green">Head Quater</font><br />
<font size="2px" color="blue">Ward no:09,Near Akshardham <br />New Delhi,
India</font><br /></div></td>
<td align="center"><div class="about">
<font size="5px" color="red"><b>Satna The City of Cement</b></font><br />
<font size="3px" color="green">Sells Department</font><br />
<font size="2px" color="blue">Near AKS ,Siddhart Nagar, <br />Madhya Pradesh
India</font><br /></div></td>
<td align="center"><div class="about">
<font size="5px" color="red"><b>Indore Mini Bombay</b></font><br />
<font size="3px" color="green">Development Department</font><br />
<font size="2px" color="blue">Near AKS ,Siddhart Nagar, <br />Madhya Pradesh
India</font><br /></div></td></tr>
</tr></table><br /><br /></td></tr></table></td></tr>
<tr>
<td class="mainfooter" bgcolor="#020031" style="border-style: 1; height: 70px;
color: #FFFFFF; text-align: center;background-image: url('img/footer-bg.png');
background-repeat: no-repeat; background-size: 30%100%; background-position:
center 5px;"><table width="100%" height="100%"><tr><td
height="20%"><b>Copyright &copy; Academic
Earth</td></tr></table></form></body></html>

```

# COURSE

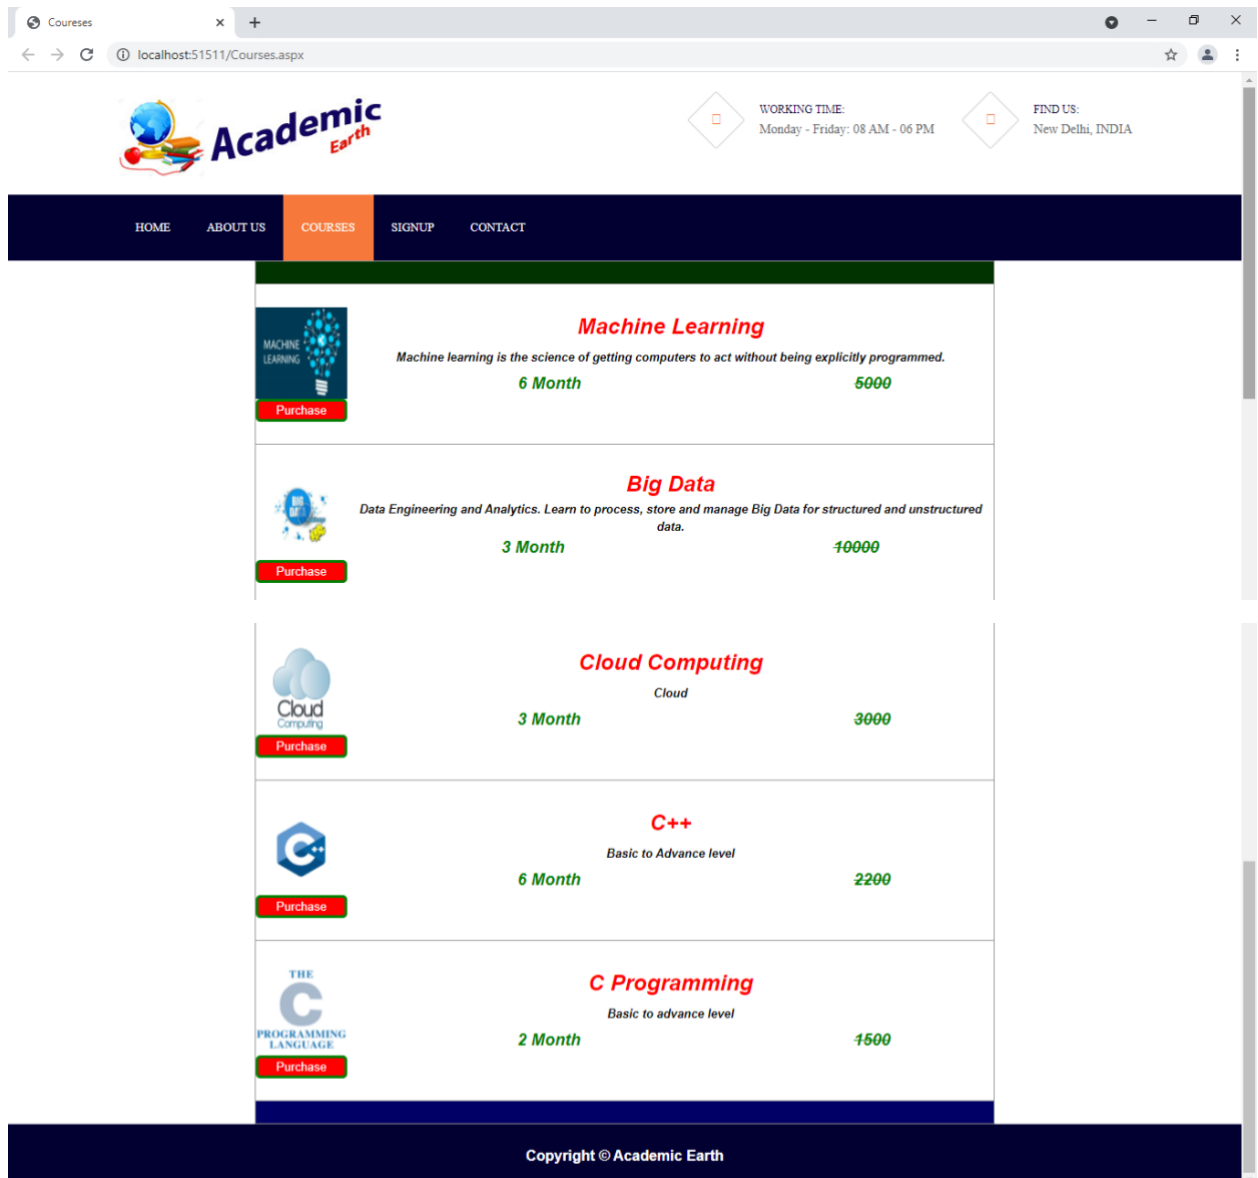

## HTML CODE

```
<%@ Page Language="C#" AutoEventWireup="true" CodeFile="Courses.aspx.cs"
Inherits="Courses" %>
```

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
<head id="Head1" runat="server">
    <title>Courses</title>
    <link href="Styles/bootstrap.min.css" rel="stylesheet" type="text/css" />
```

```

<link href="Styles/style.css" rel="stylesheet" type="text/css" />
<link href="Styles/font-awesome.min.css" rel="stylesheet" type="text/css" />
<link rel="stylesheet" type="text/css" href="Styles/main.css" />
<link href="Styles/Banner.css" rel="stylesheet" type="text/css" />
<script src="Scripts/jquery-1.9.1.min.js" type="text/javascript"></script>
<script src="Scripts/jssor.js" type="text/javascript"></script>
<script src="Scripts/jssor.slider.js" type="text/javascript"></script>
<script src="Scripts/Slide.js" type="text/javascript"></script>
<style type="text/css">
.sendbtn
{
    width : 100px;
    height: 25px;
    background-color: Red;
    color: #fff;
    border-radius: 5px;
    font-size: Small;
    border-style: solid;
    border-color: Green;
    transition: all 2s linear;
}
.sendbtn:hover
{
    background-color: green;
    color: #fff;
    border-style: solid;
    border-color: yellow;
}
</style>
</head>
<body>
    <form id="form1" runat="server">
    <table width="100%">
    <tr><td>
        <div class="header-section">
            <div class="container">
                <a href="Home.aspx" class="site-logo"></a>
                <div class="nav-switch">
                    <i class="fa fa-bars"></i></div>
                <div class="header-info">

```

```

        <div class="hf-item">
            <i class="fa fa-clock-o"></i>
            <p><span>Working time:</span>Monday - Friday: 08
AM - 06 PM</p></div>
        <div class="hf-item">
            <i class="fa fa-map-marker"></i>
            <p><span>Find us:</span>New Delhi,
INDIA</p></div></div></div></div>
        <div class="nav-section">
            <div class="container">
                <ul class="main-menu">
                    <li><a href="Home.aspx">Home</a></li>
                    <li><a href="Aboutus.aspx">About Us</a></li>
                    <li class="active"><a href="Courses.aspx">COURSES</a></li>
                    <li><a href="Signup.aspx">SignUp</a></li>
                    <li><a href="Contact.aspx">Contact</a></li>
                </ul></div></div></td></tr>
<tr><td align="center" ><asp:GridView ID="GridView1" runat="server" Width="60%"
onrowcommand="GridView1_RowCommand" AutoGenerateColumns="False"
BackColor="#FFFFFF" BorderColor="#999999"
onselectedindexchanged="GridView1_SelectedIndexChanged" ShowFooter="True"
ShowHeaderWhenEmpty="True"><AlternatingRowStyle BackColor="White" />
<Columns><asp:TemplateField><ItemTemplate>
<asp:Panel ID="Panel1" runat="server"><table width="100%">
<tr><td align="left" height="25px"></td></tr>
<tr><td rowspan="4" width="100px" bgcolor="" align="center">
<asp:Image ID="Image1" runat="server" ImageUrl="<%# "Handler.ashx?ImageID="+
Eval("ImageID") %>" Height="100px" Width="100px"/></td></tr>
<tr><td colspan="2" align="center" style="font-size: x-large; font-weight: bold; font-
style: italic; color: red"><%# Eval("CourseName") %></td></tr>
<tr><td colspan="2" align="center" style="font-size: Small; font-weight: bold; font-
style: italic; color: black"><%# Eval("CourseDesc") %></td></tr>
<tr><td colspan="1" align="center" style="font-size: large; font-weight: bold; font-
style: italic; color: green"><%# Eval("CourseDur") %></td>
<td colspan="1" align="center" style="font-size: large; font-weight: bold; font-style:
italic; color: green; text-decoration: line-through;"><%#
Eval("CourseFee") %></td></tr>
<tr><td></td></tr>
<tr><td align="left"><asp:Button ID="Button1" runat="server" Text="Purchase"
class="sendbtn"

```

```

CommandName="AddToCart"></asp:Button>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</td>
>
</tr></table></asp:Panel></ItemTemplate></asp:TemplateField></Columns>
<FooterStyle BackColor="#000066" /><HeaderStyle BackColor="#003300"
/></asp:GridView>
</td></tr>
<tr><td class="mainfooter" bgcolor="#020031" style="border-style: 1; height: 70px;
color: #FFFFFF; text-align: center; background-image: url('img/footer-bg.png');
background-repeat: no-repeat; background-size: 30%100%; background-position:
center 5px;"><table width="100%" height="100%">
<tr><td height="20%"><b>Copyright &copy; Academic
Earth</td></tr></table></form>
</body>
</html>

```



# PROFILE

The screenshot shows a web browser window with the title 'Make Profile'. The address bar displays 'localhost:51511/CreateProfile.aspx'. The page features the 'Academic Earth' logo at the top. Below the logo is a form titled 'Make Profile'. The form contains the following fields and elements:

- AID:** Pre-filled with 'AE66240'.
- Name:** An empty text input field.
- Father Name:** An empty text input field.
- DOB:** An empty text input field.
- College:** An empty text input field.
- Branch:** An empty text input field.
- Address:** A larger empty text input field.
- Upload Photo:** A button labeled 'Choose File' and a status 'No file chosen'.
- Submit:** A button at the bottom right of the form.

On the right side of the form, there is a small image of three students (two girls and one boy) looking at a laptop. The text 'AE66240' is also visible next to the image. At the bottom of the page, a footer states 'All Right are reserved by Academic Earth'.

## HTML CODE

```
<%@ Page Language="C#" AutoEventWireup="true" CodeFile="CreateProfile.aspx.cs"
Inherits="CreateProfile" %>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
<head id="Head1" runat="server">
  <title>Make Profile</title>
  <style type="text/css">
    .style1
    {
      height: 80px;
    }
    .style2
    {
      height: 30px;
      background-color: #00001a;
      border: 1px;
      color: #FFFFFF;
    }
    .style2:hover
    {
```

```
    height: 30px;
    background-color: red;
    border: 1px;
    color: #FFFFFF;
}
.style3
{
    height: 15px;
}
.style6
{
    height: 30px;
    align: center;
    color: White;
    background-color: #00001a;
}
a
{
    text-decoration: none;
    color: #FFFFFF;
}
a:hover
{
    text-decoration: none;
    background-color: red;
}
.style8
{
    width: 183px;
}
.style9
{
    width: 46px;
    font-weight: 700;
}
.style10
{
    width: 204px;
    font-weight: bold;
}
</style></head>
```

```

<body>
<form id="form1" runat="server">
<center>
<table width="70%">
<tr><td colspan="2" class="style1" style="background-position: center bottom;
background-image: url('img/logo.jpg'); background-repeat: no-repeat; background-size:
100%100%"></td>
<td colspan="3" class="style1"></td></tr>
<tr><td colspan="5" class="style3"></td></tr>
<tr><td width="20%" align="center" class="style2" colspan="4"><a
href="CreateProfile.aspx">Make Profile</a></td></tr>
<tr><td colspan="5" style="background-image: url('img/studentreg.png'); background-
repeat: no-repeat; background-position: top right; background-size: 40%100%"><center>
<table width="90%" style="height: 400px">
<tr><td class="style10">AID</td>
<td class="style8">
<asp:Label ID="Label2" runat="server" Text="AE0001"></asp:Label></td>
<td class="style9">Email</td>
<td><asp:Label ID="Label1" runat="server" Text="Label"></asp:Label></td></tr>
<tr><td colspan="" class="style10">Name</td><td colspan="2">
<asp:TextBox ID="TextBox1" runat="server" Width="200px"
onTextChanged="TextBox1_TextChanged" ReadOnly="True"></asp:TextBox></td>
<td rowspan="3"><asp:Image ID="Image2" runat="server" Width="100px"
Height="100px" BorderWidth="1" BorderStyle="Solid"
Visible="False"></asp:Image></td></tr>
<tr><td colspan="1" class="style10">Father Name</td>
<td colspan="2"><asp:TextBox ID="TextBox2" runat="server"
Width="200px"></asp:TextBox></td>
</tr>
<tr><td colspan="1" class="style10">DOB</td>
<td colspan="2"><asp:TextBox ID="TextBox3" runat="server" Width="200px"
onTextChanged="TextBox3_TextChanged"></asp:TextBox></td></tr>
<tr><td colspan="1" class="style10">College</td><td colspan="2">
<asp:TextBox ID="TextBox5" runat="server" Width="200px"></asp:TextBox></td>
<td rowspan="2"><asp:Image ID="Image1" runat="server" Height="42px"
Width="112px"></asp:Image></td></tr>
<tr><td colspan="1" class="style10">Branch</td>
<td colspan="2"><asp:TextBox ID="TextBox6" runat="server"
Width="200px"></asp:TextBox></td>
</tr>
<tr><td colspan="1" class="style10">Address</td>

```

```

<td colspan="3"><asp:TextBox ID="TextBox4" runat="server" Height="80px"
TextMode="MultiLine"
    Width="370px"></asp:TextBox></td></tr>
<tr>
<td colspan="1" class="style10">Upload Photo</td>
<td colspan="2"><asp:FileUpload ID="FileUpload1" runat="server" /></td></tr>

<tr>
<td colspan="3" align="right"><asp:Button ID="Button2" runat="server" Text="Submit"
    onclick="Button2_Click"></asp:Button></td>
</tr>
</table></center></td></tr></td></tr>
<tr><td colspan="5" class="style6" align="center">All Right are reserved by Academic
Earth</td></tr>
</table>
</center>
</form>
</body>
</html>

```

# DELETE COURSE

```
<%@ Page Language="C#" AutoEventWireup="true" CodeFile="Delete.aspx.cs"
Inherits="Delete" %>
```

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
```

```
<head id="Head1" runat="server">
```

```
<title>Delete Items</title>
```

```
<style type="text/css">
```

```
.style1
```

```
{
```

```
height: 80px;
```

```
}
```

```
.style2
```

```
{
```

```
height: 30px;
```

```
background-color: #00001a;
```

```
border: 1px;
```

```
color: #FFFFFF;
```

```
}
```

```
.style2:hover
```

```
{
```

```
height: 30px;
```

```
background-color: red;
```

```

        border: 1px;
        color: #FFFFFF;
    }
    .style3
    {
        height: 15px;
    }
    .style5
    {
        height: 310px;
    }
    .style6
    {
        height: 30px;
        align: center;
        color: White;
        background-color: #00001a;
    }
    a
    {
        text-decoration: none;
        color: #FFFFFF;
    }
    a:hover
    {
        text-decoration: none;
        background-color: red;
    }
    .style7
    {
        width: 170px;
    }
</style>
</head>
<body>
    <form id="form1" runat="server">
    <center>
    <table width="70%">
    <tr><td colspan ="2" class="style1" style="background-position: center bottom;
background-image: url('img/logo.jpg'); background-repeat: no-repeat; background-
size: 100%100%"></td>

```

```

<td colspan="3" class="style1"></td></tr>
<tr><td colspan="5" class="style3"></td></tr>
<tr>
<td width="20%" align="center" class="style2"><a
href="AdminFirst.aspx">Home</a></td>
<td width="20%" align="center" class="style2"><a href="Upload.aspx">Upload
Info</a></td>
<td width="20%" align="center" class="style2"><a href="Update.aspx">Update
Info</a></td>
<td width="20%" align="center" class="style2"><a href="Delete.aspx">Delete
Info</a></td>
<td width="20%" align="center" class="style2"><asp:Button ID="Button1"
runat="server" Text="Logout" BackColor="Transparent" ForeColor="#FFFFFF"
BorderStyle="None" onclick="Button1_Click"></asp:Button></td></tr>
<tr><td colspan="5" class="style5" align="right" style="background-image:
url('img/admin.jpg'); background-repeat: no-repeat; background-position: left center;
background-size: 50%100%">
<right><table width="50%" style="height: 300px">
<tr><td align="center">Course ID</td>
<td align="center" class="style7"><asp:TextBox ID="TextBox1" runat="server"
Width="103px"></asp:TextBox><asp:Button ID="Button3" runat="server"
Text="Find.." onclick="Button3_Click" Width="53px"></asp:Button></td></tr>
<tr>
<td align="center">Course Name</td>
<td align="center" class="style7"><asp:TextBox ID="TextBox2"
runat="server"></asp:TextBox></td>
</tr>
<tr><td align="center">Course Desc</td>
<td align="center" class="style7"><asp:TextBox ID="TextBox3" runat="server"
Height="88px"
TextMode="MultiLine"></asp:TextBox></td></tr>
<tr>
<td align="center">Course Duration</td>
<td align="center" class="style7"><asp:TextBox
ID="TextBox4"runat="server"></asp:TextBox></td>
</tr>
<tr>
<td align="center">Course Fee</td>
<td align="center" class="style7"><asp:TextBox ID="TextBox5"
runat="server"></asp:TextBox></td>
</tr>

```


```
<td colspan="2" align="center"><asp:Button ID="Button2" runat="server"
Text="Submit" onclick="Button2_Click"></asp:Button></td>
</tr></table></right></td></tr></td></tr>
<tr><td colspan="5" class="style6" align="center">All Right are reserved by Academic
Earth</td></tr>
</table></center></form>
</body>
</html>
```




# PROFILE

Browser window: Delete Items | localhost:51511/DeleteProfile.aspx

**Academic Earth**

Your Profile	Purchase Package	Your Packages	Delete Profile	Logout
AID	AE0001	Email	AE0001	
Name	<input type="text"/>			
Father Name	<input type="text"/>			
DOB	<input type="text"/>			
College	<input type="text"/>	AE0001		
Branch	<input type="text"/>			
Address	<input type="text"/>			
<input type="button" value="Submit"/>				



All Right are reserved by Academic Earth

# HTML CODE

```
<%@ Page Language="C#" AutoEventWireup="true" CodeFile="DeleteProfile.aspx.cs" Inherits="DeleteProfile" %>
```

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
<head id="Head1" runat="server">
  <title>Delete Items</title>
  <style type="text/css">
    .style1
    {
      height: 80px;
    }
    .style2
    {
      height: 30px;
      background-color: #00001a;
      border: 1px;
      color: #FFFFFF;
    }
    .style2:hover
```

```
{
    height: 30px;
    background-color: red;
    border: 1px;
    color: #FFFFFF;
}
.style3
{
    height: 15px;
}
.style6
{
    height: 30px;
    align: center;
    color: White;
    background-color: #00001a;
}
a
{
    text-decoration: none;
    color: #FFFFFF;
}
a:hover
{
    text-decoration: none;
    background-color: red;
}
.style8
{
    width: 183px;
}
.style9
{
    width: 46px;
    font-weight: 700;
}
.style10
{
    width: 204px;
    font-weight: bold;
}
```

```

</style>
<script language="JavaScript">
    this.history.forward(-1);
</script>
</head>
<body>
    <form id="form1" runat="server">
        <center>
            <table width="70%">
                <tr>
                    <td colspan="2" class="style1" style="background-position: center bottom;
background-image: url('img/logo.jpg'); background-repeat: no-repeat; background-
size: 100%100%"></td>
                    <td colspan="3" class="style1"></td></tr>
                    <tr><td colspan="5" class="style3"></td></tr>
                    <tr>
                        <td width="20%" align="center" class="style2"><a href="YourProfile.aspx">Your
Profile</a></td>
                        <td width="20%" align="center" class="style2"><a href="Purchase.aspx">Purchase
Packege</a></td>
                        <td width="20%" align="center" class="style2"><a href="Pac.aspx">Your
Packages</a></td>
                        <td width="20%" align="center" class="style2"><a
href="DeleteProfile.aspx">Delete Profile</a></td>
                        <td width="20%" align="center" class="style2"><asp:Button ID="Button1"
runat="server" Text="Logout" BackColor="Transparent" ForeColor="#FFFFFF"
BorderStyle="None" onclick="Button1_Click"></asp:Button></td></tr>

                    <tr>
                        <td colspan="5" style="background-image: url('img/studentreg.png'); background-
repeat: no-repeat; background-position: top right; background-size: 40%100%">
                            <center>
                                <table width="90%" style="height: 400px">
                                    <tr>
                                        <td class="style10">AID</td>
                                        <td class="style8">
                                            <asp:Label ID="Label2" runat="server" Text="AE0001"></asp:Label></td>
                                        <td class="style9">Email</td>
                                        <td><asp:Label ID="Label1" runat="server" Text="AE0001"></asp:Label></td></tr>
                                    <tr>
                                        <td colspan="4" class="style10">Name</td>

```

```


<td colspan="2"><asp:TextBox ID="TextBox1" runat="server" Width="200px"
ReadOnly="True"></asp:TextBox></td>
<td rowspan="3"><asp:Image ID="Image2" runat="server" Width="100px"
Height="100px" BorderWidth="1" BorderStyle="Solid"></asp:Image></td> </tr>
<tr>
<td colspan="1" class="style10">Father Name</td>
<td colspan="2">
<asp:TextBox ID="TextBox2" runat="server" Width="200px"
ReadOnly="True"></asp:TextBox>
</td> </tr>
<tr><td colspan="1" class="style10">DOB</td>
<td colspan="2">
<asp:TextBox ID="TextBox3" runat="server" Width="200px"
ReadOnly="True"></asp:TextBox>
</td></tr>
<tr>
<td colspan="1" class="style10">College</td>
<td colspan="2">
<asp:TextBox ID="TextBox5" runat="server" Width="200px"
ReadOnly="True"></asp:TextBox></td>
<td rowspan="2">
<asp:Image ID="Image1" runat="server" Height="42px"
Width="112px"></asp:Image></td></tr>
<tr>
<td colspan="1" class="style10">Branch</td>
<td colspan="2">
<asp:TextBox ID="TextBox6" runat="server" Width="200px"
ReadOnly="True"></asp:TextBox>
</td></tr>
<tr>
<td colspan="1" class="style10">Address</td>
<td colspan="3">
<asp:TextBox ID="TextBox4" runat="server" Height="80px"
TextMode="MultiLine"
Width="370px" ReadOnly="True"></asp:TextBox></td> </tr>
<tr>
<td colspan="3" align="right"><asp:Button ID="Button2" runat="server"
Text="Submit"
onclick="Button2_Click"></asp:Button></td> </tr>
</table></center></td></tr></td></tr>

```

<tr><td colspan="5" class="style6" align="center">All Right are reserved by Academic Earth</td></tr>

</table></center></form></body></html>

## **FORGET PASSWORD**

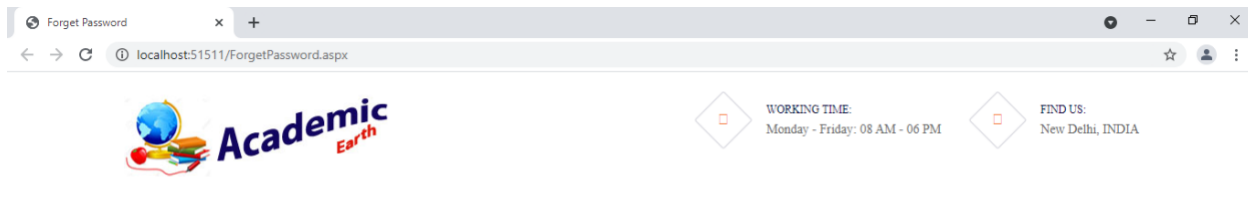

Email	
Mobile Number	
New Password	
Conform Password	
	Submit

Copyright © Academic Earth

<%@ Page Language="C#" AutoEventWireup="true"  
CodeFile="ForgetPassword.aspx.cs" Inherits="CloudStatic" %>

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"  
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title>Forget Password</title>

<link href="Styles/bootstrap.min.css" rel="stylesheet" type="text/css" />

<link href="Styles/style.css" rel="stylesheet" type="text/css" />

<link href="Styles/font-awesome.min.css" rel="stylesheet" type="text/css" />

<link href="Styles/Banner.css" rel="stylesheet" type="text/css" />

<link href="Styles/themify-icons.css" rel="stylesheet" type="text/css" />

<link href="Styles/magnific-popup.css" rel="stylesheet" type="text/css" />

<link href="Styles/main.css" rel="stylesheet" type="text/css" />

<script src="Scripts/jquery-1.9.1.min.js" type="text/javascript"></script>

<script src="Scripts/jssor.js" type="text/javascript"></script>

<script src="Scripts/jssor.slider.js" type="text/javascript"></script>

<script src="Scripts/Slide.js" type="text/javascript"></script>

</head>

<body>

<form id="form1" runat="server">

```

<table width="100%">
<tr><td>
    <div class="header-section">
        <div class="container">
            <a href="ForgetPassword.aspx" class="site-logo"></a>
            <div class="nav-switch"><i class="fa fa-bars"></i></div>
            <div class="header-info">
                <div class="hf-item">
                    <i class="fa fa-clock-o"></i>
                    <p><span>Working time:</span>Monday - Friday: 08
AM - 06 PM</p></div>
                    <div class="hf-item">
                        <i class="fa fa-map-marker"></i>
                        <p><span>Find us:</span>New Delhi, INDIA</p>
                    </div></div></div></div><hr /><div><center><br /><br
/><br /><br />
    <table width="500px" border="1">
    <tr>
    <td>Email</td>
    <td><asp:TextBox ID="TextBox1" runat="server"></asp:TextBox></td>
    </tr>
    <tr>
    <td>Mobile Number</td>
    <td><asp:TextBox ID="TextBox4" runat="server"></asp:TextBox></td>
    </tr>
    <tr>
    <td>New Password</td>
    <td><asp:TextBox ID="TextBox2" runat="server"
TextMode="Password"></asp:TextBox></td>
    </tr>
    <tr>
    <td>Conform Password</td>
    <td><asp:TextBox ID="TextBox3" runat="server"
TextMode="Password"></asp:TextBox></td>
    </tr>
    <tr>
    <td></td>
    <td align="center"><asp:Button ID="Button1" runat="server" Text="Submit"
onclick="Button1_Click"></asp:Button></td>
    </tr></table></center></div><br /><br /><br /><br /><br /><br />

```

```

<tr>
<td class="mainfooter" bgcolor="#020031"
    style="border-style: 1; height: 70px; color: #FFFFFF; text-align: center;
    background-image: url('img/footer-bg.png'); background-repeat: no-repeat;
    background-size: 30%100%; background-position: center 5px;">
    <table width="100%" height="100%">
    <tr><td height="20%"><b>Copyright &copy; Academic
Earth</b></td></tr></td></tr>
</table>
</form></body></html>

```

# COURSE

```
<%@ Page Language="C#" AutoEventWireup="true" CodeFile="Pac.aspx.cs"
Inherits="Pac" %>
```

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
```

```
<head id="Head1" runat="server">
```

```
<title>Your Package</title>
```

```
<style type="text/css">
```

```
.style1
```

```
{
```

```
height: 80px;
```

```
}
```

```
.style2
```

```
{
```

```
height: 30px;
```

```
background-color: #00001a;
```

```
border: 1px;
```

```
color: #FFFFFF;
```

```
}
```

```
.style2:hover
```

```
{
```

```
height: 30px;
```

```
background-color: red;
```



```
border: 1px;
color: #FFFFFF;
}
.style3
{
height: 15px;
}
.style6
{
height: 30px;
align: center;
color: White;
background-color: #00001a;
}
a
{
text-decoration: none;
color: #FFFFFF;
}
a:hover
{
text-decoration: none;
background-color: red;
}
.style8
{
width: 111px;
}
.style9
{
width: 119px;
font-weight: 700;
}
.style10
{
width: 204px;
font-weight: bold;
}
.style11
{
width: 119px;
```

```

        font-weight: bold;
    }
    .style12
    {
        width: 204px;
        font-weight: bold;
        height: 38px;
    }
    .style13
    {
        height: 38px;
    }
</style>
<script language="JavaScript">
    this.history.forward(-1);
</script>
</head>
<body>
    <form id="form1" runat="server">
    <center>
    <table width="70%">
    <tr>
    <td colspan="2" class="style1" style="background-position: center bottom;
background-image: url('img/logo.jpg'); background-repeat: no-repeat; background-
size: 100%100%"></td>
    <td colspan="3" class="style1"></td>
    </tr>
    <tr><td colspan="5" class="style3"></td></tr>
    <tr>
    <td width="20%" align="center" class="style2"><a href="YourProfile.aspx">Your
Profile</a></td>
    <td width="20%" align="center" class="style2"><a href="Purchase.aspx">Purchase
Package</a></td>
    <td width="20%" align="center" class="style2"><a href="Pac.aspx">Your
Packages</a></td>
    <td width="20%" align="center" class="style2"><a
href="DeleteProfile.aspx">Delete Profile</a></td>
    <td width="20%" align="center" class="style2"><asp:Button ID="Button1"
runat="server" Text="Logout" BackColor="Transparent" ForeColor="#FFFFFF"
BorderStyle="None" onclick="Button1_Click"></asp:Button></td>
    </tr>

```

```

<tr>
<td colspan="5" style="background-image: url('img/studentreg.png'); background-
repeat: no-repeat; background-position: top right; background-size: 40%100%">
<center>
<table width="90%" style="height: 00px">
<tr>
<td class="style10">Course ID</td>
<td class="style8">
<asp:Label ID="Label2" runat="server" Text="AE0001"></asp:Label>
</td>
<td class="style9">&nbsp;</td>
<td rowspan="2">
<asp:Image ID="Image2" runat="server" BorderStyle="Solid" BorderWidth="1"
Height="100px" Width="100px" />
</td>
</tr>
<tr>
<td colspan="" class="style10">Course Name</td>
<td colspan="2"><asp:TextBox ID="TextBox1" runat="server" Width="200px"
ReadOnly="True"></asp:TextBox></td></tr>
<tr>
<td colspan="1" class="style10">Course Description</td>
<td colspan="3">
<asp:TextBox ID="TextBox4" runat="server" Height="80px"
TextMode="MultiLine"
Width="334px" ontextchanged="TextBox4_TextChanged"
ReadOnly="True"></asp:TextBox>
</td>
</tr>
<tr>
<td colspan="1" class="style10">Course Fee</td>
<td colspan="1" class="style8"><asp:TextBox ID="TextBox2" runat="server"
Width="100px" ReadOnly="True"></asp:TextBox></td>
<td colspan="1" class="style11">Course Duration</td>
<td colspan="1"><asp:TextBox ID="TextBox3" runat="server" Width="100px"
ReadOnly="True"></asp:TextBox></td>
</tr>
<td colspan="1" class="style12">Date of Purchase</td>
<td colspan="" align="center" class="style13">
<asp:Label ID="Label3" runat="server" Text="AE0001"></asp:Label>
</td>

```

```

        <td align="left" colspan="2"><asp:Button ID="Button2" runat="server"
Text="Open Your Package" onclick="Button2_Click" BackColor="#FF3300"
BorderColor="#000066" BorderWidth="1px" Font-Bold="True" ForeColor="White"
style="height: 24px"></asp:Button></td>
    </tr>
</table>
</center>
</td>
</tr>
</td>
</tr>
    <tr><td colspan="5" class="style6" align="center">All Right are reserved by
Academic Earth</td></tr>
</table>
</center>
</form>
</body>
</html>

```

# PURCHASE COURSE

```
<%@ Page Language="C#" AutoEventWireup="true" CodeFile="Purchase.aspx.cs"
Inherits="Purchase" %>
```

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
<head id="Head1" runat="server">
  <title>Your Package</title>
  <style type="text/css">
    .style1
    {
      height: 80px;
    }
    .style2
    {
      height: 30px;
      background-color: #00001a;
      border: 1px;
      color: #FFFFFF;
    }
    .style2:hover
    {
      height: 30px;
```

```
background-color: red;
border: 1px;
color: #FFFFFF;
}
.style3
{
height: 15px;
}
.style6
{
height: 30px;
align: center;
color: White;
background-color: #00001a;
}
a
{
text-decoration: none;
color: #FFFFFF;
}
a:hover
{
text-decoration: none;
background-color: red;
}
.style8
{
width: 111px;
}
.style9
{
width: 119px;
font-weight: 700;
}
.style10
{
width: 204px;
font-weight: bold;
}
.style11
{
```

```

        width: 119px;
        font-weight: bold;
    }
</style>
<script language="JavaScript">
    this.history.forward(-1);
</script>
</head>
<body>
    <form id="form1" runat="server">
        <center>
            <table width="70%">
                <tr>
                    <td colspan="2" class="style1"
                        style="background-position: center bottom; background-image:
url('img/logo.jpg'); background-repeat: no-repeat; background-size:
100%100%"></td>
                    <td colspan="3" class="style1"></td>
                </tr>
                <tr><td colspan="5" class="style3"></td></tr>
                <tr>
                    <td width="20%" align="center" class="style2"><a href="YourProfile.aspx">Your
Profile</a></td>
                    <td width="20%" align="center" class="style2"><a href="Purchase.aspx">Purchase
Package</a></td>
                    <td width="20%" align="center" class="style2"><a href="Pac.aspx">Your
Packages</a></td>
                    <td width="20%" align="center" class="style2"><a
href="DeleteProfile.aspx">Delete Profile</a></td>
                    <td width="20%" align="center" class="style2"><asp:Button ID="Button1"
                        runat="server" Text="Logout" BackColor="Transparent" ForeColor="#FFFFFF"
                        BorderStyle="None" onclick="Button1_Click"></asp:Button></td>
                </tr>
                <tr>
                    <td colspan="5"
                        style="background-image: url('img/studentreg.png'); background-repeat: no-
repeat; background-position: top right; background-size: 40%100%">
                        <center>
                            <table width="90%" style="height: 00px">
                                <tr>

```

```

<td colspan="" class="style10">Select Course</td>
<td colspan="2"><asp:DropDownList ID="DropDownList1" runat="server"
Width="200px"
    AutoPostBack="True" Font-Bold="True"
    onselectedindexchanged="DropDownList1_SelectedIndexChanged">
<asp:ListItem>--Select--</asp:ListItem>
</asp:DropDownList>
<asp:Button ID="Button2" runat="server" Visible="false"
    Text="Purchase" onclick="Button2_Click" BackColor="#FF3300"
    BorderColor="#000066" BorderWidth="1px" Font-Bold="True"
ForeColor="White"></asp:Button></td>
<td rowspan="2">
<asp:Image ID="Image2" runat="server" BorderStyle="Solid" BorderWidth="1"
    Height="100px" Width="100px" ImageUrl="~/img/lear.jpg" />
</td>
</tr>
<tr>
<td class="style10">Course ID</td>
<td class="style8">
<asp:Label ID="Label2" runat="server" Text="AE0001"></asp:Label>
</td>
</tr>
<tr>
<td colspan="1" class="style10">Course Description</td>
<td colspan="3">
<asp:TextBox ID="TextBox4" runat="server" Height="80px"
TextMode="MultiLine"
    Width="334px" ReadOnly="True"></asp:TextBox>
</td>
</tr>
<tr>
<td colspan="1" class="style10">Course Fee</td>
<td colspan="1" class="style8"><asp:TextBox ID="TextBox2" runat="server"
    Width="100px" ReadOnly="True"></asp:TextBox></td>
<td colspan="1" class="style11">Course Duration</td>
<td colspan="1"><asp:TextBox ID="TextBox3" runat="server" Width="100px"
    ReadOnly="True"></asp:TextBox></td>
</tr>
<tr>
<td colspan="3" align="right"><asp:Label ID="Label1" runat="server"
Visible="False"></asp:Label></td>

```



```
</tr>
</table>
</center>
</td>
</tr>
```

```
</td></tr>
<tr><td colspan="5" class="style6" align="center">All Right are reserved by
Academic Earth</td></tr>
</table>
</center>
</form>
</body>
</html>
```

## UPDATE INFORMATION

```
<%@ Page Language="C#" AutoEventWireup="true" CodeFile="Update.aspx.cs"
Inherits="Update" %>
```

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
<head id="Head1" runat="server">
  <title>Update Items</title>
  <style type="text/css">
    .style1
    {
      height: 80px;
    }
    .style2
    {
      height: 30px;
      background-color: #00001a;
      border: 1px;
      color: #FFFFFF;
    }
    .style2:hover
```

```

{
    height: 30px;
    background-color: red;
    border: 1px;
    color: #FFFFFF;
}
.style3
{
    height: 15px;
}
.style5
{
    height: 310px;
}
.style6
{
    height: 30px;
    align: center;
    color: White;
    background-color: #00001a;
}
a
{
    text-decoration: none;
    color: #FFFFFF;
}
a:hover
{
    text-decoration: none;
    background-color: red;
}
</style>
</head>
<body>
    <form id="form1" runat="server">
        <center>
            <table width="70%">
                <tr>
                    <td colspan="2" class="style1"

```


```

        style="background-position: center bottom; background-image:
url('img/logo.jpg'); background-repeat: no-repeat; background-size:
100%100%"></td>
        <td colspan="3" class="style1"></td>
    </tr>
    <tr><td colspan="5" class="style3"></td></tr>
    <tr>
        <td width="20%" align="center" class="style2"><a
href="AdminFirst.aspx">Home</a></td>
        <td width="20%" align="center" class="style2"><a href="Upload.aspx">Upload
Info</a></td>
        <td width="20%" align="center" class="style2"><a href="Update.aspx">Update
Info</a></td>
        <td width="20%" align="center" class="style2"><a href="Delete.aspx">Delete
Info</a></td>
        <td width="20%" align="center" class="style2"><asp:Button ID="Button1"
runat="server" Text="Logout" BackColor="Transparent" ForeColor="#FFFFFF"
BorderStyle="None" onclick="Button1_Click"></asp:Button></td>
    </tr>
    <tr>
        <td colspan="5" class="style5" align="right"
            style="background-image: url('img/admin.jpg'); background-repeat: no-repeat;
background-position: left center; background-size: 50%100%">
            <right>
            <table width="50%" style="height: 300px">
                <tr>
                    <td align="center">Course Name</td>
                    <td align="center"><asp:DropDownList ID="DropDownList1" runat="server"
Width="170px"
AutoPostBack="True" Font-Bold="True"
onselectedindexchanged="DropDownList1_SelectedIndexChanged">
                        <asp:ListItem>--Select--</asp:ListItem>
                        </asp:DropDownList></td>
                </tr>
                <tr>
                    <td align="center">Course ID</td>
                    <td align="center"><asp:TextBox ID="TextBox2"
runat="server"></asp:TextBox></td>
                </tr>
                <tr>
                    <td align="center">Course Desc</td>

```



## UPLOAD INFORMATION

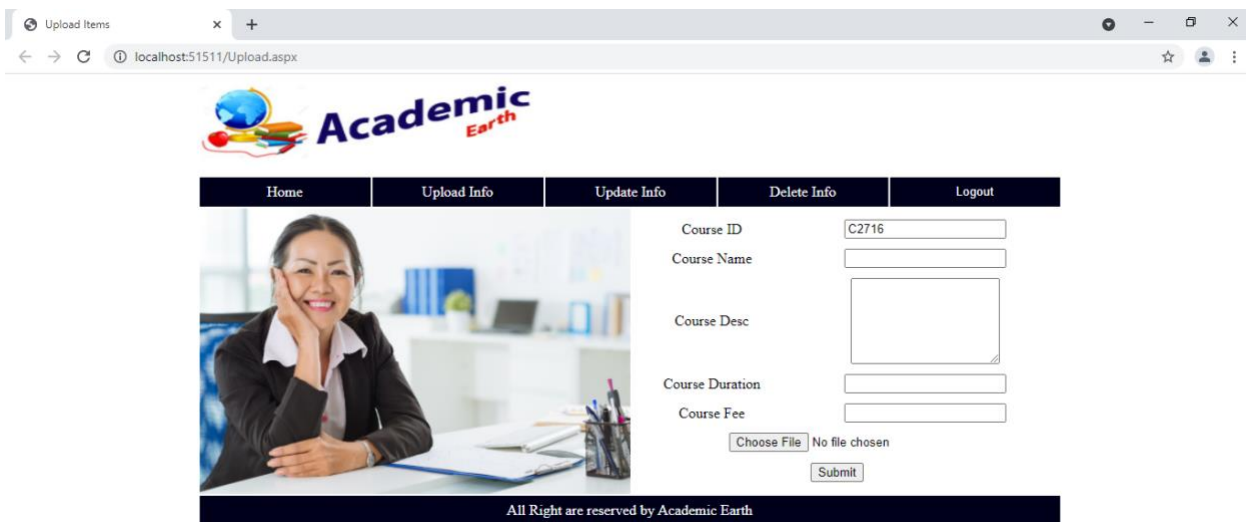

Upload Items

localhost:51511/Upload.aspx

**Academic Earth**

Home Upload Info Update Info Delete Info Logout

Course ID: C2716

Course Name:

Course Desc:

Course Duration:

Course Fee:

Choose File No file chosen

Submit

All Right are reserved by Academic Earth

```
<%@ Page Language="C#" AutoEventWireup="true" CodeFile="Upload.aspx.cs"
Inherits="Upload" %>
```

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
<head id="Head1" runat="server">
  <title>Upload Items</title>
  <style type="text/css">
    .style1
    {
      height: 80px;
    }
    .style2
    {
      height: 30px;
      background-color: #00001a;
      border: 1px;
```

```

        color: #FFFFFF;
    }
    .style2:hover
    {
        height: 30px;
        background-color: red;
        border: 1px;
        color: #FFFFFF;
    }
    .style3
    {
        height: 15px;
    }
    .style5
    {
        height: 310px;
    }
    .style6
    {
        height: 30px;
        align: center;
        color: White;
        background-color: #00001a;
    }
    a
    {
        text-decoration: none;
        color: #FFFFFF;
    }
    a:hover
    {
        text-decoration: none;
        background-color: red;
    }
</style>
</head>
<body>
    <form id="form1" runat="server">
    <center>
    <table width="70%">
    <tr>

```

```

<td colspan="2" class="style1"
    style="background-position: center bottom; background-image:
url('img/logo.jpg'); background-repeat: no-repeat; background-size:
100%100%"></td>
<td colspan="3" class="style1"></td>
</tr>
<tr><td colspan="5" class="style3"></td></tr>
<tr>
<td width="20%" align="center" class="style2"><a
href="AdminFirst.aspx">Home</a></td>
<td width="20%" align="center" class="style2"><a href="Upload.aspx">Upload
Info</a></td>
<td width="20%" align="center" class="style2"><a href="Update.aspx">Update
Info</a></td>
<td width="20%" align="center" class="style2"><a href="Delete.aspx">Delete
Info</a></td>
<td width="20%" align="center" class="style2"><asp:Button ID="Button1"
    runat="server" Text="Logout" BackColor="Transparent" ForeColor="#FFFFFF"
    BorderStyle="None" onclick="Button1_Click"></asp:Button></td>
</tr>
<tr>
<td colspan="5" class="style5" align="right"
    style="background-image: url('img/admin.jpg'); background-repeat: no-repeat;
background-position: left center; background-size: 50%100%">
<right>
<table width="50%" style="height: 300px">
<tr>
<td align="center">Course ID</td>
<td align="center"><asp:TextBox ID="TextBox1"
runat="server"></asp:TextBox></td>
</tr>
<tr>
<td align="center">Course Name</td>
<td align="center"><asp:TextBox ID="TextBox2"
runat="server"></asp:TextBox></td>
</tr>
<tr>
<td align="center">Course Desc</td>
<td align="center"><asp:TextBox ID="TextBox3" runat="server" Height="88px"
    TextMode="MultiLine"></asp:TextBox></td>
</tr>

```





## UPLOAD VIDEO

```
<%@ Page Language="C#" AutoEventWireup="true"
CodeFile="UploadContent.aspx.cs" Inherits="UploadContent" %>
```

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title>Upload Video</title>
    <link href="Styles/bootstrap.min.css" rel="stylesheet" type="text/css" />
    <link href="Styles/style.css" rel="stylesheet" type="text/css" />
    <link href="Styles/font-awesome.min.css" rel="stylesheet" type="text/css" />
    <link href="Styles/themify-icons.css" rel="stylesheet" type="text/css" />
    <link href="Styles/magnific-popup.css" rel="stylesheet" type="text/css" />
    <link rel="stylesheet prefetch" href="https://cdnjs.cloudflare.com/ajax/libs/font-
awesome/4.6.3/css/font-awesome.min.css">
    <script src="https://code.jquery.com/jquery-2.2.4.min.js"></script>

    <script src="index.js" type="text/javascript"></script>
```

```

<style type="text/css">
hr {
display: block;
margin-top: 0.0em;
margin-bottom: 0.0em;
margin-left: auto;
margin-right: auto;
border-style: solid;
border-width: 5px;
}
</style>
<link href="css/style.css" rel="stylesheet" type="text/css" />
</head>
<body>
<form id="form1" runat="server">
<table width="100%">
<tr>
<td>
<div class="header-section">
<div class="container">
<a href="Home.aspx" class="site-logo">
</a>
<div class="nav-switch">
<i class="fa fa-bars"></i>
</div>
<div class="header-info">
<div class="hf-item">
<i class="fa fa-clock-o"></i>
<p><span>Working time:</span>Monday - Friday: 08
AM - 06 PM</p>
</div>
<div class="hf-item">
<i class="fa fa-map-marker"></i>
<p><span>Find us:</span>New Delhi, INDIA</p>
</div>
</div>
</div>
</div>
</td>
</tr>
<tr>

```

```

<td align="center">
<div style="width: 85%; height: 0px; background-color: #FFFFFF">
<hr/> <table width="100%">
<tr>
<td>
<ul class="accordion-menu">
<li><div class="dropdownlink"><i class="fa fa-paper-plane" aria-
hidden="true"></i><a href="UploadContent.aspx">Upload Video</a></div></li>
<li><div class="dropdownlink"><i class="fa fa-paper-plane" aria-
hidden="true"></i><a href="UploadPDF.aspx"> Upload PDF</a></div></li>
<li><div class="dropdownlink"><i class="fa fa-paper-plane" aria-
hidden="true"></i><a href="UploadQuestion.aspx"> Upload Question</div></li>
<li><div class="dropdownlink"><i class="fa fa-paper-plane" aria-hidden="true"></i><a
href="Update.aspx">Close</a></div></li>
</ul>
</td>
<td style="width: 80%; position: relative;" rowspan="" align="center">
<div style="height: 250px; padding: 30px">
<center>
<table width="60%" style="height: 200px; color: #FFFFFF; font-weight: bold;"
bgcolor="#FFFFFF">
<tr>
<td align="left" style="color: #000000">Course Name</td>
<td align="right"><asp:TextBox ID="TextBox1" runat="server"
ReadOnly="True"></asp:TextBox></td>
</tr>
<tr>
<td align="left" style="color: #000000">Topic Name</td>
<td align="right"><asp:TextBox ID="TextBox2" runat="server"></asp:TextBox></td>
</tr>
<tr>
<td align="left" style="color: #000000">Video File</td>
<td align="right"><asp:FileUpload ID="FileUpload1" runat="server" Font-
Bold="True"
ForeColor="#000066"></asp:FileUpload></td>
</tr>
<tr>
<td align="center" style="color: #000000"></td>
<td align="right"><asp:Button ID="Button1" runat="server" Text="Upload"
Width="200px"
onclick="Button1_Click"></asp:Button></td>


```

```

</tr>
<tr>
<td align="center" colspan="2" style="color: #000000"><asp:Label ID="Label1"
runat="server"></asp:Label></td>
</tr>
<tr>
<td align="center" colspan="2">
<asp:HyperLink ID="HyperLink1" runat="server" NavigateUrl="~/Videos.aspx">View
All Video</asp:HyperLink>
</td>
</tr>
</table>
</center>
</div>
</td>
</tr>
<tr>
<td align="center" colspan="2" style="color: #FFFFFF; font-size: large; font-weight:
bold; height: 30px; background-color: #000066;">@ Academic Earth</td>
</tr>
</table>
</div>
</td>
</tr>
</table>
</form>
</body>
</html>

```

## UPLOAD PDF

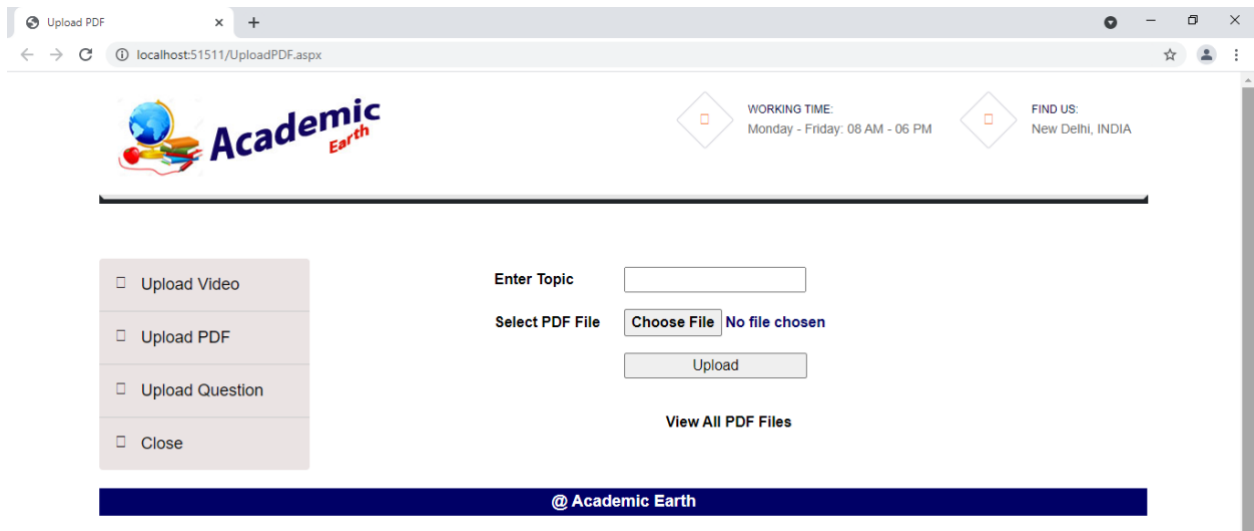

```
<%@ Page Language="C#" AutoEventWireup="true" CodeFile="UploadPDF.aspx.cs"
Inherits="UploadPDF" %>
```

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
```

```
<head id="Head1" runat="server">
```

```
<title>Upload PDF</title>
```

```
<link href="Styles/bootstrap.min.css" rel="stylesheet" type="text/css" />
```

```
<link href="Styles/style.css" rel="stylesheet" type="text/css" />
```

```
<link href="Styles/font-awesome.min.css" rel="stylesheet" type="text/css" />
```

```
<link href="Styles/themify-icons.css" rel="stylesheet" type="text/css" />
```

```
<link href="Styles/magnific-popup.css" rel="stylesheet" type="text/css" />
```

```
<link rel='stylesheet prefetch' href='https://cdnjs.cloudflare.com/ajax/libs/font-
awesome/4.6.3/css/font-awesome.min.css'>
```

```
<script src='https://code.jquery.com/jquery-2.2.4.min.js'></script>
```

```
<script src="index.js" type="text/javascript"></script>
```

```
<style type="text/css">
```

```

hr {
display: block;
margin-top: 0.0em;
margin-bottom: 0.0em;
margin-left: auto;
margin-right: auto;
border-style: solid;
border-width: 5px;
}
</style>
<link href="css/style.css" rel="stylesheet" type="text/css" />

</head>
<body>
  <form id="form1" runat="server">

    <table width="100%">
    <tr>
    <td>
      <div class="header-section">
        <div class="container">
          <a href="Home.aspx" class="site-logo">
            </a>
            <div class="nav-switch">
              <i class="fa fa-bars"></i>
            </div>
            <div class="header-info">
              <div class="hf-item">
                <i class="fa fa-clock-o"></i>
                <p><span>Working time:</span>Monday - Friday: 08
AM - 06 PM</p>
              </div>
              <div class="hf-item">
                <i class="fa fa-map-marker"></i>
                <p><span>Find us:</span>New Delhi, INDIA</p>
              </div>
            </div>
          </div>
        </td>
      </tr>
    </table>
  </form>

```

```

<tr>
<td align="center">
<div style="width: 85%; height: 0px; background-color: #FFFFFF">
<hr/>
<table width="100%">
<tr>
<td>
<ul class="accordion-menu">
<li><div class="dropdownlink"><i class="fa fa-paper-plane" aria-
hidden="true"></i><a href="UploadContent.aspx">Upload Video</a></div></li>
<li><div class="dropdownlink"><i class="fa fa-paper-plane" aria-
hidden="true"></i><a href="UploadPDF.aspx"> Upload PDF</a></div></li>
<li><div class="dropdownlink"><i class="fa fa-paper-plane" aria-
hidden="true"></i><a href="UploadQuestion.aspx"> Upload Question</div></li>
<li><div class="dropdownlink"><i class="fa fa-paper-plane" aria-hidden="true"></i><a
href="Update.aspx">Close</a></div></li>
</ul>
</td>
<td style="width: 80%; position: relative;" rowspan="">
<div style="height: 250px;padding: 30px">
<center>
<table width="60%" style="height: 200px; color: #FFFFFF; font-weight: bold;"
bgcolor="#FFFFFF">
<tr>
<td align="left" style="color: #000000">Enter Topic</td>
<td align="left"><asp:TextBox ID="TextBox1" runat="server" ReadOnly="False"
ontextchanged="TextBox1_TextChanged"></asp:TextBox></td>
</tr>
<tr>
<td align="left" style="color: #000000">Select PDF File</td>
<td align="left"><asp:FileUpload ID="FileUpload1" runat="server" Font-Bold="True"
ForeColor="#000066"></asp:FileUpload></td>
</tr>
<tr>
<td align="center" style="color: #000000"></td>
<td align="left">
<asp:Button ID="Button1" runat="server" Text="Upload" Width="200px"
onclick="Button1_Click"></asp:Button></td>
</tr>
<tr>

```



```

        <td align="center" colspan="2" style="color: #000000"><asp:Label ID="Label1"
runat="server"></asp:Label></td>
    </tr>
    <tr>
        <td align="center" colspan="2">
            <asp:HyperLink ID="HyperLink1" runat="server" NavigateUrl="~/PDF.aspx">View All
PDF Files</asp:HyperLink>
        </td>
    </tr>
</table>
</center>
</div>
</td>
</tr>
<tr>
    <td align="center" colspan="2" style="color: #FFFFFF; font-size: large; font-weight:
bold; height: 30px; background-color: #000066;">@ Academic Earth</td>
</tr>
</table>
</div>
</td>
</tr>
</table>
</form>
</body>
</html>

```

## UPLOAD QUESTION

```
<%@ Page Language="C#" AutoEventWireup="true"  
CodeFile="UploadQuestion.aspx.cs" Inherits="UploadQuestion" %>
```

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"  
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
```

```
<html xmlns="http://www.w3.org/1999/xhtml">  
<head id="Head1" runat="server">  
  <title>Upload Video</title>  
  <link href="Styles/bootstrap.min.css" rel="stylesheet" type="text/css" />  
  <link href="Styles/style.css" rel="stylesheet" type="text/css" />  
  <link href="Styles/font-awesome.min.css" rel="stylesheet" type="text/css" />  
  <link href="Styles/themify-icons.css" rel="stylesheet" type="text/css" />  
  <link href="Styles/magnific-popup.css" rel="stylesheet" type="text/css" />  
  <link rel="stylesheet prefetch" href='https://cdnjs.cloudflare.com/ajax/libs/font-  
awesome/4.6.3/css/font-awesome.min.css'>  
  <script src='https://code.jquery.com/jquery-2.2.4.min.js'></script>  
  
  <script src="index.js" type="text/javascript"></script>  
  <style type="text/css">  
    hr {  
      display: block;  
      margin-top: 0.0em;  
      margin-bottom: 0.0em;  
      margin-left: auto;  
      margin-right: auto;  
      border-style: solid;  
      border-width: 5px;  
    }  
  </style>  
  <link href="css/style.css" rel="stylesheet" type="text/css" />
```

```

</head>
<body>
  <form id="form1" runat="server">
    <table width="100%">
      <tr>
        <td>
          <div class="header-section">
            <div class="container">
              <a href="Home.aspx" class="site-logo">
                </a>
                <div class="nav-switch">
                  <i class="fa fa-bars"></i>
                </div>
                <div class="header-info">
                  <div class="hf-item">
                    <i class="fa fa-clock-o"></i>
                    <p><span>Working time:</span>Monday - Friday: 08 AM - 06 PM</p>
                  </div>
                  <div class="hf-item">
                    <i class="fa fa-map-marker"></i>
                    <p><span>Find us:</span>New Delhi, INDIA </p>
                  </div>
                </div>
              </div>
            </div>
          </td>
          <td align="center">
            <div style="width: 85%; height: 0px; background-color: #FFFFFF">
            <hr/>
            <table width="100%">
              <tr>
                <td>
                  <ul class="accordion-menu">
                    <li><div class="dropdownlink"><i class="fa fa-paper-plane" aria-
                      hidden="true"></i><a href="UploadContent.aspx">Upload Video</a></div></li>
                    <li><div class="dropdownlink"><i class="fa fa-paper-plane" aria-
                      hidden="true"></i><a href="UploadPDF.aspx"> Upload PDF</a></div></li>

```

```

<li><div class="dropdownlink"><i class="fa fa-paper-plane" aria-
hidden="true"></i><a href="UploadQuestion.aspx"> Upload Question</div></li>
<li><div class="dropdownlink"><i class="fa fa-paper-plane" aria-hidden="true"></i><a
href="Update.aspx">Close</a></div></li>
</ul>
</td>
<td style="width: 80%; position: relative;" rowspan="" align="center">
<div style="height: 250px; padding: 30px">
<center>
<table width="90%" style="height: 200px; color: #FFFFFF; font-weight: bold;"
bgcolor="#FFFFFF">
<tr>
<td align="left" style="color: #000000">Question</td>
<td align="right">
<asp:TextBox ID="TextBox1" runat="server"
Width="400px" Height="85px" TextMode="MultiLine"></asp:TextBox></td>
</tr>

<tr>
<td align="center" style="color: #000000"></td>
<td align="right"><asp:Button ID="Button1" runat="server" Text="Upload"
Width="200px"
onclick="Button1_Click"></asp:Button></td>
</tr>
<tr>
<td align="center" colspan="2" style="color: #000000"><asp:Label ID="Label1"
runat="server"></asp:Label></td>
</tr>
<tr>
<td align="center" colspan="2">
<asp:HyperLink ID="HyperLink1" runat="server"
NavigateUrl="~/MinorTest.aspx">View All Question</asp:HyperLink>
</td>
</tr> </table>
</center>
</div>
</td>
</tr>
<tr>
<td align="center" colspan="2" style="color: #FFFFFF; font-size: large; font-weight:
bold; height: 30px; background-color: #000066;">@ Academic Earth</td>

```

```
</tr>
</table>
</div></td>
</tr>
</table>
</form>
</body></html>
```

## TESTING

Software testing is the process of evaluation a software item to deduct differences between we need input and aspect output. Testing access quality of product. Software testing is the process that should be done during the developing process in other word software testing is verification and validation process.

**White-Box Testing:** It is also called glass box testing. It is a test case design method that uses the control structure of the procedural design to derive test cases. In this all statement in the program has been executed at least once during testing that all logical conditions have been exercised. Using white box testing methods, software engineer can derive test cases that

- Guarantee that all independent paths within a module have been exercised at least once.
- Exercise all loops at their boundaries and within their operational bounds.
- Exercise all logical decision on their true and false sides.
- Exercise internal data structure to assure their validity.

**Black Box Testing:** It focuses on the functional requirements of the software i.e. black box testing enables the software engineer to derive sets of input condition that will fully exercise all functional requirements for a program. Black box Testing is not alternative to white box testing. Rather, it is a complementary approach that is likely to uncover different class errors than white box testing.

Black box Testing attempts to find errors in the following categories:

- Incorrect or missing function.
- Interface error.
- Errors in the data structure or external database.

- Performance error.
- Initialization and termination errors.

## **SYSTEM ANALYSIS**

### **Feasibility study:**

Feasibility is define as the practical extend to which a project can be perform successfully. To evaluate feasibility, feasibility study is performed which determines whether the solution considered to complete the requirement is practical and workable in the software. The objective of feasibility study is to establish the reason for developing the software that is expectable to users, confrontable to establish standard. The another objective of feasibility study is to determine, whether the software can be implement using the current technology and within the specified budget and schedule.

### **Technical feasibility:**

It access current resource and technology. Which are required to complete. User requirements in the software within the allocated time and budget. It determines whether the relevant technology is stable and establish.

Advantages of language are achieved as:

- Good interface for user.
- Allow changes as when required.
- It is rapid action development tool, which makes processing fast.
- Coding make technical processing easy.

### **Economic feasibility:**

It determines whether the required software is capable of generating financial gain for the organisation.it involve the cost incurred on the software development team and

cost of hardware and software. Software is said to be economically feasible if it focus on the below points cost incurred on software development to produce long term gain for organisation cost required to conduct full software investigation cost of hardware software development team and training.

## DETAILED HARDWARE AND SOFTWARE

### Hardware specification of machine used

Central processing unit	Intel core3i
Random access memory	4GB
Hard disk drive	500GB
Keyboard	102 key
Mouse	Windows Compatible

### Software (O.S. Language, Packages) used along version

Operating system	Windows 10
Front end	ASP.NET
Back end	SQL server
Package	MS-Word

# **SECURITY**

Computer is a versatile instruction with almost enormous capacity computation at an unimaginable speed. The end user is concerned about security along with increased dependence on the computer. In system development, the project manager must consider measures for maintaining data and controlling secret at all time. The level of protection depends on the sensitivity of the data, the reliability of the user, & the complexity of the system. A well designed system includes control procedure to provide physical protection (hardware security) and restrict system access (database security).

## **Application security:**

In our project, going password an application security. In our project, if the user type wrong password and user name then he/she cannot enter inside the project, if the users want to use or run the project then he/she must enter the correct user name and password. If the user type three times wrong password and click three times enter then our project will close and he/she not enter any type.

## **Database security:**

The database security is most essential to avoid theft or leakage of confidential data. A control must be kept over the issue of data file, so that possibilities of destruction are minimized. Any person not open database. If he/she know password then he/she open database. The security arrangement should be provided by computer installation initially at time it is being established rather than being added later on. Security is like seat belt it does not guarantee there will be no accident. However, when accident does occur it may be found too much cheaper, it may records. The system security problem can be divided into following related issues.



# **LIMITATIONS**

Our system is also having limitations:

- There is no automatically facility of saving to main database.
- Any from which will directly close may loss database information.
- There is no facility of direct access.
- There is no automatically edit the records.

- **Documentation:**

It is time consuming and requires expertise in creating good documentation from view point of top administrators users.

- **Manuals:**

Various manuals are to be prepared such as user manuals, System manuals etc. It needs time, human labor and are subject to change drastically as the technology changes.

- **Online Help:**

One needs to provide online help to various users so that all the features of the software can be properly understood by the user.

- **Complexity:**

It is time consuming to manage and debug all the modules one by one.

## **CONCLUSION**

Online education is a growing and exciting new way to learn about almost anything. If there is a course you have always wanted to take or a skill you have always wanted to learn, but you have not had the time to attend a traditional face-to-face class or there hasn't been an opportunity near you, then online learning might be your answer.

Today's online learning opportunities offer everything from one-hour live workshops to online degrees. There is virtually something for everyone, all you have to do is find it.

However, learning online is different from learning in a face-to-face setting, and it is important to think about your goals, your needs and your interests before committing yourself to something. You also need to think about the time you have available, your comfort level with using technology and the equipment that is at your disposal. As we all become more familiar with computers and computer access becomes increasingly common, online learning will continue to open doors and offer learning opportunities for those who are interested.

# **BIBLIOGRAPHY**

## **ASP .NET**

- Beginning ASP .NET 2008(Wrox)
- Professional ASP .NET 2008(Wrox)
- E-Book of mastering ASP .NET
- MSDN library of visual studio 2008

## **MS SQL SERVER by Youtube & Google**

### **System analysis & designing**

Author  
Publisher

ELIAS M AWARD  
Galgotia Publication

### **Software Engineering**

Author  
Publisher

ROGER S. PRESMAN  
McGraw HILL INTL. EDN.