




Build your Excel dashboard

A complete, click-by-click guide for Excel 2021 on Windows.
From your first import to a finished project.

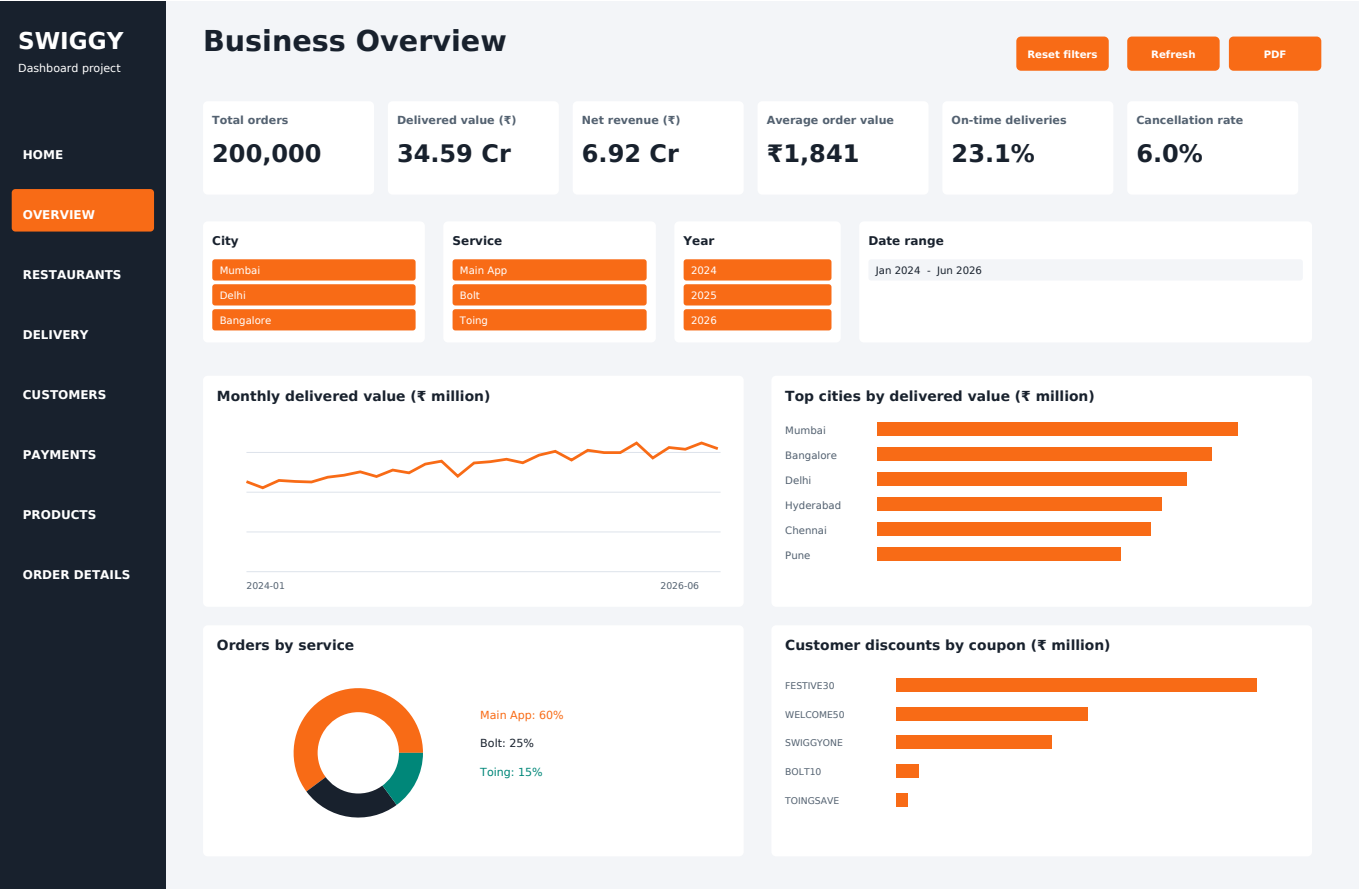

Target layout sketch. Exact charts will be created from your PivotTables; this is not an Excel screenshot.

14 source files. 200,000 orders. Six analysis pages, a Home page, and an Order Details page.

Follow the numbered steps in order. Each page ends with a check before you continue.

Your build sequence

Click a section name to jump to it. Use the PDF bookmarks to find any individual step.

Set up	4
Import and clean	10
Prepare the tables	25
Build the model	44
Add calculations	48
Build the report	59
Design the pages	69
Build the charts	78
Finish the interactions	103
Build the Home page	110
Make the action buttons	112
Test and present	119
Quick reference	125

Use the workbook names and formulas exactly as written. The guide contains all button code and all calculations; no finished Excel file is required.

Where everything goes

Area	Excel range / purpose
Sidebar	A1:F48; eight page links
Page title	H2:AG4
Action buttons	AI2:AM4, AO2:AR4, AT2:AV4
Six cards	H6:M10, O6:T10, V6:AA10, AC6:AH10, AJ6:AO10, AQ6:AV10
City / Service / Year	H12:O18, Q12:X18, Z12:AF18
Timeline	AH12:AV18
Chart 1 / Chart 2	H20:AA32 / AC20:AV32
Chart 3 / Chart 4	H34:AA46 / AC34:AV46
Footer	H47:AV48
Print area	A1:AW48

Use Alt while dragging chart and control borders to snap them to cell edges. Leave the blank columns and rows between panels as spacing.

The common filters are Date, City, Service, and Year. Customers and Products have their own card labels, while using the same filter selection.

Order Details is a separate record-search table with its own column filters. The PDF button exports a snapshot; the Excel file retains the interactions.

STEP 001

Create your project folder

Work in: Windows File Explorer

1. Press Windows + E. Click Documents on the left.
2. Right-click an empty space. Choose New > Folder. Name it Swiggy Dashboard Project.
3. Open this folder. Create another folder inside it named Data.
4. Copy all 14 CSV files into Data. Keep their original filenames. Do not open and resave the CSVs in Excel.
5. Create one more folder inside Swiggy Dashboard Project named Exports.
6. Open Excel. Click Blank workbook.
7. Click File > Save As > Browse. Choose Swiggy Dashboard Project.
8. Name the workbook Swiggy_Dashboard.xlsm. For Save as type, choose Excel Macro-Enabled Workbook (*.xlsm). Click Save.

This guide builds the workbook by hand. The PDF itself is the instruction book; dashboard filters will work in the Excel workbook.

Before you continue

Your project folder contains Data, Exports, and Swiggy_Dashboard.xlsm. The Excel workbook is outside the Data folder.

STEP 002

Check Excel and show the two tabs

Work in: Excel > File > Account

1. Click File > Account > About Excel. Check that this is Excel 2021 for Windows. Note whether it says 32-bit or 64-bit.
2. Close About Excel. This project has 200,000 orders and 372,503 item rows. Use 64-bit Excel when available; close other large workbooks before importing.
3. Click File > Options > Customize Ribbon. On the right, tick Developer. Click OK.
4. Click File > Options > Add-ins. At the bottom, change Manage to COM Add-ins. Click Go.
5. Tick Microsoft Power Pivot for Excel. Click OK. Look for Power Pivot across the top.
6. If Power Pivot was disabled, use File > Options > Add-ins > Manage: Disabled Items > Go. Select Power Pivot and click Enable, then repeat the COM Add-ins step.
7. If Power Pivot is not listed at all, check your Office installation with your college or computer administrator before starting the imports. This guide requires that add-in.

[Microsoft: Power Pivot setup](#)

Before you continue

Data, Power Pivot, and Developer are visible on the ribbon. You can remain on Excel 2021; the guide does not need Microsoft 365.

STEP 003

Learn the controls used in this guide

Work in: Excel workbook

1. The buttons Home, Insert, Data, View, and Power Pivot are ribbon tabs. Click a tab to show its controls.
2. Find the small box to the left of the formula bar. This is the Name Box. It normally shows a cell address such as A1.
3. Click the Name Box, type B2, and press Enter. Excel selects cell B2.
4. When the guide says select H6:M10, type H6:M10 in the Name Box and press Enter.
5. The long box beside fx is the formula bar. Paste worksheet formulas there, including the opening = sign.
6. To rename a worksheet, double-click its tab at the bottom, type the name, and press Enter.
7. To select several columns in Power Query, click the first column header, hold Ctrl, and click the other headers. Release Ctrl before choosing a command.
8. Save with Ctrl + S after each page. If the ribbon disappears, press Ctrl + F1.

Power Query formulas, Power Pivot measures, worksheet formulas, and button code go in different places. Each code step below tells you the correct place.

Before you continue

You can select a cell or range using the Name Box, find the formula bar, and rename a sheet.

STEP 004

Create the starting worksheets

Work in: Swiggy_Dashboard.xlsm

1. Rename Sheet1 to Overview.
2. Click the + beside the sheet tabs. Rename the new sheet Home.
3. Add four more sheets, named Details, Pivots, KPI, and Checks.
4. Drag Home to the far left. Keep Overview next to it.
5. Leave the sheets empty. Later, you will copy the finished Overview frame to create Restaurants, Delivery, Customers, Payments, and Products.
6. Click Formulas > Calculation Options > Automatic. Press Ctrl + S.

Use these exact spellings. Formulas, navigation links, and button code depend on them.

Before you continue

The starting tabs are Home, Overview, Details, Pivots, KPI, and Checks.

STEP 005

Check the source files

Work in: Your Data folder

CSV file	Rows	Query name
Fact_Orders.csv	200,000	qOrders
Fact_OrderItems.csv	372,503	qItems
Fact_Financials.csv	200,000	qFinancials
Fact_Delivery.csv	187,925	qDelivery
Fact_Payments.csv	200,000	qPayments
Fact_Reviews.csv	40,000	qReviews
Dim_City.csv	12	qCity
Dim_Restaurant.csv	4,000	qRestaurant
Dim_Customer.csv	25,000	qCustomer
Dim_DeliveryPartner.csv	750	qRider
Dim_PaymentMode.csv	6	qPaymentMode
Dim_Menu.csv	40,391	qMenu
Dim_Coupon.csv	5	qCoupon
Dim_Service.csv	3	qService

The source uses names such as Restaurant_1 and Item_1. Keep those labels. Do not replace them with invented real restaurant or dish names.

Before you continue

There are 14 CSV files. Dim_Date is not required; you will create Calendar inside Excel.

STEP 006

Keep the measurements correct

Work in: Read this before importing

1. Keep every order in the source, including Cancelled orders. Measures will choose the correct status.
2. Delivered Value means the customer total for delivered orders, including fees and after the customer discount.
3. Net Revenue uses Net_Revenue_Swiggy for delivered orders. It follows the dataset definition and is not profit.
4. Keep negative Net_Revenue_Swiggy values. There are 3,110 delivered orders with a negative value.
5. Keep blank Coupon_ID values: they mean no coupon. Keep missing review ratings blank; zero would reduce the average incorrectly.
6. Use food and delivery ratings only for reviewed, delivered orders. Exclude the 2,447 reviews attached to cancelled orders from those measures.
7. Use the supplied delivery duration fields. The delivery clock timestamps have ordering inconsistencies, so do not calculate duration from them.
8. Use Order_Date for trends. The data ends on 30 June 2026. Do not compare the full 2025 total with the half-year 2026 total as a growth rate.

The table model will be Calendar -> Orders -> Items. Orders has one row per order; Items has one row per order item. This prevents repeated order revenue.

Before you continue

You will preserve the source files and apply these rules in the prepared queries and measures.

STEP 007

Import the first CSV

Work in: Excel > Data

1. Click Data > Get Data > From File > From Text/CSV.
2. Open your Data folder. Select Fact_Orders.csv and click Import.
3. In the preview, check that Delimiter is Comma and that each heading is in a separate column. If file origin is shown, choose 65001: Unicode (UTF-8).
4. Click Transform Data. A separate Power Query Editor window opens.
5. On the right, find Query Settings > Properties > Name. Replace the name with qOrders.
6. If the right pane is hidden, click View > Query Settings.
7. Check the first header: it must be Order_ID. If Column1, Column2 appear instead, click Home > Use First Row as Headers.
8. Continue to the next page before loading this query.

Before you continue

Power Query Editor is open, the query is named qOrders, and the headings match the CSV.

STEP 008

Set up qOrders

Work in: Power Query Editor > qOrders

- 1. Stay in qOrders in Power Query Editor.
- 2. For each row in the table below, select the named column headers using Ctrl. Choose Transform > Data Type and the type shown. Click Replace Current if asked.
- 3. For decimal columns, the source uses a dot, such as 14.99. If you see errors, use the Data Type dropdown > Using Locale > Decimal Number > English (United States).
- 4. Click the arrow under Home > Close & Load. Choose Close & Load To. Select Only Create Connection. Leave Add this data to the Data Model unticked. Click OK.

Set this type	Columns
Whole Number	Order_ID, Customer_ID, Restaurant_ID, Rider_ID, City_ID, Coupon_ID, Delivery_Time_Expected, Delivery_Time_Actual, Delivery_Fee_Customer, Packaging_Fee_Customer
Date	Order_Date
Time	Order_Time
Decimal Number	Delivery_Distance, Subtotal, Discount_Customer, Platform_Fee_Customer, Grand_Total_Customer
Text	Service_Type, Status, Cancellation_Reason

Keep null Coupon_ID and Cancellation_Reason values. Do not filter out cancelled orders. Coupon_ID is a Whole Number column that may contain null.

Before you continue

qOrders appears in Excel > Data > Queries & Connections. It is Connection only. Expected source rows: 200,000.

STEP 009

Set up qltems

Work in: Power Query Editor > qltems

- 1. In the Excel window, click Data > Get Data > From File > From Text/CSV. Select Fact_OrderItems.csv. Click Import, then Transform Data.
- 2. In Query Settings > Name, type qltems. Check that the first row contains the actual column headings.
- 3. For each row in the table below, select the named column headers using Ctrl. Choose Transform > Data Type and the type shown. Click Replace Current if asked.
- 4. For decimal columns, the source uses a dot, such as 14.99. If you see errors, use the Data Type dropdown > Using Locale > Decimal Number > English (United States).
- 5. Click the arrow under Home > Close & Load. Choose Close & Load To. Select Only Create Connection. Leave Add this data to the Data Model unticked. Click OK.

Set this type	Columns
Whole Number	Order_Item_ID, Order_ID, Menu_ID, Quantity
Decimal Number	Selling_Price_Per_Item, Discount_Item, GST_Item, Net_Amount_Item

Discount_Item is per unit. $Net_Amount_Item = Quantity * (Selling_Price_Per_Item - Discount_Item) + GST_Item$. Keep the supplied totals.

Before you continue

qltems appears in Excel > Data > Queries & Connections. It is Connection only. Expected source rows: 372,503.

STEP 010

Set up qFinancials

Work in: Power Query Editor > qFinancials

1. In the Excel window, click Data > Get Data > From File > From Text/CSV. Select Fact_Financials.csv. Click Import, then Transform Data.
2. In Query Settings > Name, type qFinancials. Check that the first row contains the actual column headings.
3. For each row in the table below, select the named column headers using Ctrl. Choose Transform > Data Type and the type shown. Click Replace Current if asked.
4. For decimal columns, the source uses a dot, such as 14.99. If you see errors, use the Data Type dropdown > Using Locale > Decimal Number > English (United States).
5. Click the arrow under Home > Close & Load. Choose Close & Load To. Select Only Create Connection. Leave Add this data to the Data Model unticked. Click OK.

Set this type	Columns
Whole Number	Financial_ID, Order_ID, Restaurant_ID, Delivery_Fee_Customer, Packaging_Fee_Customer
Text	Service_Type
Decimal Number	Restaurant_Commission_Rate, Restaurant_Commission_Amount, Platform_Fee_Customer, Net_Revenue_Swiggy, Restaurant_Payout

Restaurant_Commission_Rate already contains fractions such as 0.18. Keep it unchanged; 0.18 means 18%. Keep negative revenue.

Before you continue

qFinancials appears in Excel > Data > Queries & Connections. It is Connection only. Expected source rows: 200,000.

STEP 011

Set up qDelivery

Work in: Power Query Editor > qDelivery

1. In the Excel window, click Data > Get Data > From File > From Text/CSV. Select Fact_Delivery.csv. Click Import, then Transform Data.
2. In Query Settings > Name, type qDelivery. Check that the first row contains the actual column headings.
3. For each row in the table below, select the named column headers using Ctrl. Choose Transform > Data Type and the type shown. Click Replace Current if asked.
4. For decimal columns, the source uses a dot, such as 14.99. If you see errors, use the Data Type dropdown > Using Locale > Decimal Number > English (United States).
5. Click the arrow under Home > Close & Load. Choose Close & Load To. Select Only Create Connection. Leave Add this data to the Data Model unticked. Click OK.

Set this type	Columns
Whole Number	Delivery_ID, Order_ID, Rider_ID, Delay_Minutes
Time	Pickup_Time, Arrival_Time_Restaurant, Delivered_Time
Decimal Number	Distance_Travelled
Text	Weather_Condition, Traffic_Level

Keep the timestamp columns in the connection, but the dashboard will use duration fields from Fact_Orders.

Before you continue

qDelivery appears in Excel > Data > Queries & Connections. It is Connection only. Expected source rows: 187,925.

STEP 012

Set up qPayments

Work in: Power Query Editor > qPayments

1. In the Excel window, click Data > Get Data > From File > From Text/CSV. Select Fact_Payments.csv. Click Import, then Transform Data.
2. In Query Settings > Name, type qPayments. Check that the first row contains the actual column headings.
3. For each row in the table below, select the named column headers using Ctrl. Choose Transform > Data Type and the type shown. Click Replace Current if asked.
4. For decimal columns, the source uses a dot, such as 14.99. If you see errors, use the Data Type dropdown > Using Locale > Decimal Number > English (United States).
5. Click the arrow under Home > Close & Load. Choose Close & Load To. Select Only Create Connection. Leave Add this data to the Data Model unticked. Click OK.

Set this type	Columns
Whole Number	Payment_ID, Order_ID, Payment_Mode_ID
Text	Payment_Status, Gateway
Time	Transaction_Time
Decimal Number	Refund_Amount, Cashback_Amount

Keep the source values. This query is a connection, not a worksheet table.

Before you continue

qPayments appears in Excel > Data > Queries & Connections. It is Connection only. Expected source rows: 200,000.

STEP 013

Set up qReviews

Work in: Power Query Editor > qReviews

- 1. In the Excel window, click Data > Get Data > From File > From Text/CSV. Select Fact_Reviews.csv. Click Import, then Transform Data.
- 2. In Query Settings > Name, type qReviews. Check that the first row contains the actual column headings.
- 3. For each row in the table below, select the named column headers using Ctrl. Choose Transform > Data Type and the type shown. Click Replace Current if asked.
- 4. For decimal columns, the source uses a dot, such as 14.99. If you see errors, use the Data Type dropdown > Using Locale > Decimal Number > English (United States).
- 5. Click the arrow under Home > Close & Load. Choose Close & Load To. Select Only Create Connection. Leave Add this data to the Data Model unticked. Click OK.

Set this type	Columns
Whole Number	Review_ID, Order_ID, Customer_ID, Restaurant_ID, Food_Rating, Delivery_Rating, Likes
Text	Review_Text, Sentiment

Food_Rating and Delivery_Rating are identical in this source. Preserve them; do not claim they are independent evidence.

Before you continue

qReviews appears in Excel > Data > Queries & Connections. It is Connection only. Expected source rows: 40,000.

STEP 014

Set up qCity

Work in: Power Query Editor > qCity

- 1. In the Excel window, click Data > Get Data > From File > From Text/CSV. Select Dim_City.csv. Click Import, then Transform Data.
- 2. In Query Settings > Name, type qCity. Check that the first row contains the actual column headings.
- 3. For each row in the table below, select the named column headers using Ctrl. Choose Transform > Data Type and the type shown. Click Replace Current if asked.
- 4. For decimal columns, the source uses a dot, such as 14.99. If you see errors, use the Data Type dropdown > Using Locale > Decimal Number > English (United States).
- 5. Click the arrow under Home > Close & Load. Choose Close & Load To. Select Only Create Connection. Leave Add this data to the Data Model unticked. Click OK.

Set this type	Columns
Whole Number	City_ID
Text	City_Name, Population_Density

Keep the source values. This query is a connection, not a worksheet table.

Before you continue

qCity appears in Excel > Data > Queries & Connections. It is Connection only. Expected source rows: 12.

STEP 015

Set up qRestaurant

Work in: Power Query Editor > qRestaurant

1. In the Excel window, click Data > Get Data > From File > From Text/CSV. Select Dim_Restaurant.csv. Click Import, then Transform Data.
2. In Query Settings > Name, type qRestaurant. Check that the first row contains the actual column headings.
3. For each row in the table below, select the named column headers using Ctrl. Choose Transform > Data Type and the type shown. Click Replace Current if asked.
4. For decimal columns, the source uses a dot, such as 14.99. If you see errors, use the Data Type dropdown > Using Locale > Decimal Number > English (United States).
5. Click the arrow under Home > Close & Load. Choose Close & Load To. Select Only Create Connection. Leave Add this data to the Data Model unticked. Click OK.

Set this type	Columns
Whole Number	Restaurant_ID, Opening_Year
Text	Restaurant_Name, Cuisine, City, Area, Price_Range, Partner_Type, Commission_Tier
Decimal Number	Average_Rating, Popularity
True/False	Pure_Veg
Date	Online_Since

Keep the source values. This query is a connection, not a worksheet table.

Before you continue

qRestaurant appears in Excel > Data > Queries & Connections. It is Connection only. Expected source rows: 4,000.

STEP 016

Set up qCustomer

Work in: Power Query Editor > qCustomer

1. In the Excel window, click Data > Get Data > From File > From Text/CSV. Select Dim_Customer.csv. Click Import, then Transform Data.
2. In Query Settings > Name, type qCustomer. Check that the first row contains the actual column headings.
3. For each row in the table below, select the named column headers using Ctrl. Choose Transform > Data Type and the type shown. Click Replace Current if asked.
4. For decimal columns, the source uses a dot, such as 14.99. If you see errors, use the Data Type dropdown > Using Locale > Decimal Number > English (United States).
5. Click the arrow under Home > Close & Load. Choose Close & Load To. Select Only Create Connection. Leave Add this data to the Data Model unticked. Click OK.

Set this type	Columns
Whole Number	Customer_ID, Age
Text	Name, Gender, City, Occupation, Income_Group, Age_Group
Date	Join_Date
True/False	Premium_Member

Age_Group contains 496 blanks. You will rebuild this column from Age after all imports. Keep the customer IDs even when names repeat.

Before you continue

qCustomer appears in Excel > Data > Queries & Connections. It is Connection only. Expected source rows: 25,000.

STEP 017

Set up qRider

Work in: Power Query Editor > qRider

- 1. In the Excel window, click Data > Get Data > From File > From Text/CSV. Select Dim_DeliveryPartner.csv. Click Import, then Transform Data.
- 2. In Query Settings > Name, type qRider. Check that the first row contains the actual column headings.
- 3. For each row in the table below, select the named column headers using Ctrl. Choose Transform > Data Type and the type shown. Click Replace Current if asked.
- 4. For decimal columns, the source uses a dot, such as 14.99. If you see errors, use the Data Type dropdown > Using Locale > Decimal Number > English (United States).
- 5. Click the arrow under Home > Close & Load. Choose Close & Load To. Select Only Create Connection. Leave Add this data to the Data Model unticked. Click OK.

Set this type	Columns
Whole Number	Rider_ID, Experience_Years
Text	Vehicle_Type, Shift, Service_Preference
Date	Joining_Date
Decimal Number	Rating

Keep the source values. This query is a connection, not a worksheet table.

Before you continue

qRider appears in Excel > Data > Queries & Connections. It is Connection only. Expected source rows: 750.

STEP 018

Set up qPaymentMode

Work in: Power Query Editor > qPaymentMode

1. In the Excel window, click Data > Get Data > From File > From Text/CSV. Select Dim_PaymentMode.csv. Click Import, then Transform Data.
2. In Query Settings > Name, type qPaymentMode. Check that the first row contains the actual column headings.
3. For each row in the table below, select the named column headers using Ctrl. Choose Transform > Data Type and the type shown. Click Replace Current if asked.
4. For decimal columns, the source uses a dot, such as 14.99. If you see errors, use the Data Type dropdown > Using Locale > Decimal Number > English (United States).
5. Click the arrow under Home > Close & Load. Choose Close & Load To. Select Only Create Connection. Leave Add this data to the Data Model unticked. Click OK.

Set this type	Columns
Whole Number	Payment_Mode_ID
Text	Payment_Mode_Name

Keep the source values. This query is a connection, not a worksheet table.

Before you continue

qPaymentMode appears in Excel > Data > Queries & Connections. It is Connection only.
Expected source rows: 6.

STEP 019

Set up qMenu

Work in: Power Query Editor > qMenu

1. In the Excel window, click Data > Get Data > From File > From Text/CSV. Select Dim_Menu.csv. Click Import, then Transform Data.
2. In Query Settings > Name, type qMenu. Check that the first row contains the actual column headings.
3. For each row in the table below, select the named column headers using Ctrl. Choose Transform > Data Type and the type shown. Click Replace Current if asked.
4. For decimal columns, the source uses a dot, such as 14.99. If you see errors, use the Data Type dropdown > Using Locale > Decimal Number > English (United States).
5. Click the arrow under Home > Close & Load. Choose Close & Load To. Select Only Create Connection. Leave Add this data to the Data Model unticked. Click OK.

Set this type	Columns
Whole Number	Menu_ID, Restaurant_ID, Calories
Text	Item_Name, Category, Cuisine, Veg_NonVeg
Decimal Number	Cost_Price, Selling_Price

Keep the source values. This query is a connection, not a worksheet table.

Before you continue

qMenu appears in Excel > Data > Queries & Connections. It is Connection only. Expected source rows: 40,391.

STEP 020

Set up qCoupon

Work in: Power Query Editor > qCoupon

1. In the Excel window, click Data > Get Data > From File > From Text/CSV. Select Dim_Coupon.csv. Click Import, then Transform Data.
2. In Query Settings > Name, type qCoupon. Check that the first row contains the actual column headings.
3. For each row in the table below, select the named column headers using Ctrl. Choose Transform > Data Type and the type shown. Click Replace Current if asked.
4. For decimal columns, the source uses a dot, such as 14.99. If you see errors, use the Data Type dropdown > Using Locale > Decimal Number > English (United States).
5. Click the arrow under Home > Close & Load. Choose Close & Load To. Select Only Create Connection. Leave Add this data to the Data Model unticked. Click OK.

Set this type	Columns
Whole Number	Coupon_ID, Discount_Pct, Max_Discount
Text	Coupon_Name, Campaign, Applicable_Service
Date	Expiry_Date

Discount_Pct contains whole percentages such as 50. Keep it as 50; the imported order discount amount is already supplied.

Before you continue

qCoupon appears in Excel > Data > Queries & Connections. It is Connection only. Expected source rows: 5.

STEP 021

Set up qService

Work in: Power Query Editor > qService

- 1. In the Excel window, click Data > Get Data > From File > From Text/CSV. Select Dim_Service.csv. Click Import, then Transform Data.
- 2. In Query Settings > Name, type qService. Check that the first row contains the actual column headings.
- 3. For each row in the table below, select the named column headers using Ctrl. Choose Transform > Data Type and the type shown. Click Replace Current if asked.
- 4. For decimal columns, the source uses a dot, such as 14.99. If you see errors, use the Data Type dropdown > Using Locale > Decimal Number > English (United States).
- 5. Click the arrow under Home > Close & Load. Choose Close & Load To. Select Only Create Connection. Leave Add this data to the Data Model unticked. Click OK.

Set this type	Columns
Whole Number	Service_ID, Base_Packaging_Fee
Text	Service_Name
Decimal Number	Base_Platform_Fee

Keep the source values. This query is a connection, not a worksheet table.

Before you continue

qService appears in Excel > Data > Queries & Connections. It is Connection only. Expected source rows: 3.

STEP 022

Repair the customer age groups

Work in: Data > Queries & Connections > qCustomer

1. Double-click qCustomer to open Power Query Editor.
2. Right-click the Age_Group column header. Choose Remove.
3. Click Add Column > Custom Column. In New column name, type Age_Group.
4. Paste the formula below in the Custom column formula box. Do not add =. Click OK.
5. Select the new Age_Group column. Choose Transform > Data Type > Text.
6. Filter Age to 18 as a temporary check. The displayed Age_Group should be 18-25. Remove this temporary Filtered Rows step using its X under Applied Steps.
7. Click Home > Close & Load to save the query changes.

```
if [Age] = null then "Unknown"  
else if [Age] < 18 then "Under 18"  
else if [Age] <= 25 then "18-25"  
else if [Age] <= 35 then "26-35"  
else if [Age] <= 50 then "36-50"  
else if [Age] <= 65 then "51-65"  
else "66+"
```

Before you continue

The query still contains all customers. The age-18 customers now belong to 18-25.

STEP 023

Add a readable membership label

Work in: Power Query Editor > qCustomer

1. Open qCustomer again through Data > Queries & Connections.
2. Click Add Column > Custom Column. Name the column Membership.
3. Paste the formula below without an opening =. Click OK.
4. Set Membership to Text.
5. Click Home > Close & Load.

```
if [Premium_Member] = true then "Premium"  
else "Standard"
```

Do not use Join_Date to calculate customer acquisition or tenure in this project: 48,508 orders occur before their customer join date in the supplied data.

Before you continue

Membership contains Premium and Standard. Premium_Member is still available in the source query.

STEP 024

Add payment method names

Work in: Power Query Editor > qPayments

1. Double-click qPayments in Queries & Connections.
2. Click Home > Merge Queries > Merge Queries. Do not choose Append.
3. The top table should be qPayments. Select qPaymentMode in the lower dropdown.
4. Click Payment_Mode_ID in the top table, then Payment_Mode_ID in the bottom table. Both headings should be highlighted.
5. Set Join Kind to Left Outer (all from first, matching from second). Leave fuzzy matching unticked. Click OK.
6. Find the new qPaymentMode column at the far right. Click its two-arrow expand button.
7. Untick Select All Columns. Tick only Payment_Mode_Name. Untick Use original column name as prefix. Click OK.
8. Click Home > Close & Load.

Microsoft: [Merge queries](#)

Before you continue

qPayments now contains names such as UPI and Credit Card. Its row count remains 200,000.

STEP 025

Start the prepared Orders query

Work in: Power Query Editor

1. Double-click qOrders in Queries & Connections.
2. In the Queries list on the left, right-click qOrders. Click Reference.
3. Select the new query. In Query Settings > Name, type Orders.
4. Keep qOrders unchanged. All following order merges happen in Orders.
5. In the next pages, use Left Outer joins and expand only the named fields. Do not expand the joined ID column again.
6. Do not merge the raw qItems table into Orders. Each order can have several item rows; that would repeat its financial amounts.

Before you continue

Both qOrders and Orders appear on the left. Orders is selected.

STEP 026

Add city fields to Orders

Work in: Power Query Editor > Orders

1. Select Orders in the Queries list on the left.
2. Click Home > Merge Queries > Merge Queries.
3. Keep Orders as the top table. Choose qCity as the bottom table.
4. Click City_ID in Orders, then City_ID in qCity.
5. Choose Left Outer (all from first, matching from second). Leave fuzzy matching unticked. Click OK.
6. Scroll right to the new qCity column. Click its two-arrow expand button.
7. Untick Select All Columns. Tick exactly the fields listed below. Untick Use original column name as prefix. Click OK.
8. Stay in Orders for the next step. If you need to pause, Close & Load To > Only Create Connection, then reopen Orders next time.

Expand these columns

City_Name

Before you continue

The new fields are visible in Orders. qCity remains a separate source query.

STEP 027

Add restaurant fields to Orders

Work in: Power Query Editor > Orders

1. Select Orders in the Queries list on the left.
2. Click Home > Merge Queries > Merge Queries.
3. Keep Orders as the top table. Choose qRestaurant as the bottom table.
4. Click Restaurant_ID in Orders, then Restaurant_ID in qRestaurant.
5. Choose Left Outer (all from first, matching from second). Leave fuzzy matching unticked. Click OK.
6. Scroll right to the new qRestaurant column. Click its two-arrow expand button.
7. Untick Select All Columns. Tick exactly the fields listed below. Untick Use original column name as prefix. Click OK.
8. Double-click the new Cuisine header. Rename it Restaurant_Cuisine. Press Enter.
9. Stay in Orders for the next step. If you need to pause, Close & Load To > Only Create Connection, then reopen Orders next time.

Expand these columns

Restaurant_Name

Cuisine

Price_Range

Partner_Type

Pure_Veg

Before you continue

The new fields are visible in Orders. qRestaurant remains a separate source query.

STEP 028

Add customer fields to Orders

Work in: Power Query Editor > Orders

1. Select Orders in the Queries list on the left.
2. Click Home > Merge Queries > Merge Queries.
3. Keep Orders as the top table. Choose qCustomer as the bottom table.
4. Click Customer_ID in Orders, then Customer_ID in qCustomer.
5. Choose Left Outer (all from first, matching from second). Leave fuzzy matching unticked. Click OK.
6. Scroll right to the new qCustomer column. Click its two-arrow expand button.
7. Untick Select All Columns. Tick exactly the fields listed below. Untick Use original column name as prefix. Click OK.
8. Stay in Orders for the next step. If you need to pause, Close & Load To > Only Create Connection, then reopen Orders next time.

Expand these columns

Gender

Age_Group

Membership

Income_Group

Occupation

Before you continue

The new fields are visible in Orders. qCustomer remains a separate source query.

STEP 029

Add rider fields to Orders

Work in: Power Query Editor > Orders

1. Select Orders in the Queries list on the left.
2. Click Home > Merge Queries > Merge Queries.
3. Keep Orders as the top table. Choose qRider as the bottom table.
4. Click Rider_ID in Orders, then Rider_ID in qRider.
5. Choose Left Outer (all from first, matching from second). Leave fuzzy matching unticked. Click OK.
6. Scroll right to the new qRider column. Click its two-arrow expand button.
7. Untick Select All Columns. Tick exactly the fields listed below. Untick Use original column name as prefix. Click OK.
8. Stay in Orders for the next step. If you need to pause, Close & Load To > Only Create Connection, then reopen Orders next time.

Expand these columns

Vehicle_Type

Shift

Experience_Years

Before you continue

The new fields are visible in Orders. qRider remains a separate source query.

STEP 030

Add coupon fields to Orders

Work in: Power Query Editor > Orders

1. Select Orders in the Queries list on the left.
2. Click Home > Merge Queries > Merge Queries.
3. Keep Orders as the top table. Choose qCoupon as the bottom table.
4. Click Coupon_ID in Orders, then Coupon_ID in qCoupon.
5. Choose Left Outer (all from first, matching from second). Leave fuzzy matching unticked. Click OK.
6. Scroll right to the new qCoupon column. Click its two-arrow expand button.
7. Untick Select All Columns. Tick exactly the fields listed below. Untick Use original column name as prefix. Click OK.
8. Stay in Orders for the next step. If you need to pause, Close & Load To > Only Create Connection, then reopen Orders next time.

Expand these columns

Coupon_Name

Campaign

A missing coupon name is normal for orders with no coupon. You will create a No coupon label next.

Before you continue

The new fields are visible in Orders. qCoupon remains a separate source query.

STEP 031

Add service fields to Orders

Work in: Power Query Editor > Orders

1. Select Orders in the Queries list on the left.
2. Click Home > Merge Queries > Merge Queries.
3. Keep Orders as the top table. Choose qService as the bottom table.
4. Click Service_Type in Orders, then Service_Name in qService.
5. Choose Left Outer (all from first, matching from second). Leave fuzzy matching unticked. Click OK.
6. Scroll right to the new qService column. Click its two-arrow expand button.
7. Untick Select All Columns. Tick exactly the fields listed below. Untick Use original column name as prefix. Click OK.
8. Stay in Orders for the next step. If you need to pause, Close & Load To > Only Create Connection, then reopen Orders next time.

Expand these columns

Base_Platform_Fee

Base_Packaging_Fee

Before you continue

The new fields are visible in Orders. qService remains a separate source query.

STEP 032

Add payments fields to Orders

Work in: Power Query Editor > Orders

1. Select Orders in the Queries list on the left.
2. Click Home > Merge Queries > Merge Queries.
3. Keep Orders as the top table. Choose qPayments as the bottom table.
4. Click Order_ID in Orders, then Order_ID in qPayments.
5. Choose Left Outer (all from first, matching from second). Leave fuzzy matching unticked. Click OK.
6. Scroll right to the new qPayments column. Click its two-arrow expand button.
7. Untick Select All Columns. Tick exactly the fields listed below. Untick Use original column name as prefix. Click OK.
8. Stay in Orders for the next step. If you need to pause, Close & Load To > Only Create Connection, then reopen Orders next time.

Expand these columns

Payment_Mode_Name

Payment_Status

Refund_Amount

Cashback_Amount

Gateway

Before you continue

The new fields are visible in Orders. qPayments remains a separate source query.

STEP 033

Add delivery fields to Orders

Work in: Power Query Editor > Orders

1. Select Orders in the Queries list on the left.
2. Click Home > Merge Queries > Merge Queries.
3. Keep Orders as the top table. Choose qDelivery as the bottom table.
4. Click Order_ID in Orders, then Order_ID in qDelivery.
5. Choose Left Outer (all from first, matching from second). Leave fuzzy matching unticked. Click OK.
6. Scroll right to the new qDelivery column. Click its two-arrow expand button.
7. Untick Select All Columns. Tick exactly the fields listed below. Untick Use original column name as prefix. Click OK.
8. Stay in Orders for the next step. If you need to pause, Close & Load To > Only Create Connection, then reopen Orders next time.

Expand these columns

Weather_Condition

Traffic_Level

Weather and traffic are blank for cancelled orders. Keep those blanks.

Before you continue

The new fields are visible in Orders. qDelivery remains a separate source query.

STEP 034

Add reviews fields to Orders

Work in: Power Query Editor > Orders

1. Select Orders in the Queries list on the left.
2. Click Home > Merge Queries > Merge Queries.
3. Keep Orders as the top table. Choose qReviews as the bottom table.
4. Click Order_ID in Orders, then Order_ID in qReviews.
5. Choose Left Outer (all from first, matching from second). Leave fuzzy matching unticked. Click OK.
6. Scroll right to the new qReviews column. Click its two-arrow expand button.
7. Untick Select All Columns. Tick exactly the fields listed below. Untick Use original column name as prefix. Click OK.
8. Stay in Orders for the next step. If you need to pause, Close & Load To > Only Create Connection, then reopen Orders next time.

Expand these columns

Review_ID

Food_Rating

Delivery_Rating

Sentiment

Most orders have no review. Keep their ratings null, not zero. Status-aware measures will handle the cancelled-order reviews.

Before you continue

The new fields are visible in Orders. qReviews remains a separate source query.

STEP 035

Add financials fields to Orders

Work in: Power Query Editor > Orders

1. Select Orders in the Queries list on the left.
2. Click Home > Merge Queries > Merge Queries.
3. Keep Orders as the top table. Choose qFinancials as the bottom table.
4. Click Order_ID in Orders, then Order_ID in qFinancials.
5. Choose Left Outer (all from first, matching from second). Leave fuzzy matching unticked. Click OK.
6. Scroll right to the new qFinancials column. Click its two-arrow expand button.
7. Untick Select All Columns. Tick exactly the fields listed below. Untick Use original column name as prefix. Click OK.
8. Stay in Orders for the next step. If you need to pause, Close & Load To > Only Create Connection, then reopen Orders next time.

Expand these columns

Restaurant_Commission_Rate

Restaurant_Commission_Amount

Net_Revenue_Swiggy

Restaurant_Payout

Do not expand delivery, platform, or packaging fees again. Those fields already exist in Orders.

Before you continue

The new fields are visible in Orders. qFinancials remains a separate source query.

STEP 036

Create Coupon_Label

Work in: Power Query Editor > Orders

1. Select Orders. Click Add Column > Custom Column.
2. In New column name, type Coupon_Label.
3. Paste the formula below into Custom column formula without an opening =. Click OK.
4. Select the new column. Choose Transform > Data Type > Text.
5. Check the new values. Keep all order rows.

```
if [Coupon_Name] = null then "No coupon"  
else [Coupon_Name]
```

Before you continue

Orders without a coupon are labelled No coupon.

STEP 037

Create Delivery_Band

Work in: Power Query Editor > Orders

1. Select Orders. Click Add Column > Custom Column.
2. In New column name, type Delivery_Band.
3. Paste the formula below into Custom column formula without an opening =. Click OK.
4. Select the new column. Choose Transform > Data Type > Text.
5. Check the new values. Keep all order rows.

```
if [Status] <> "Delivered" then "Not delivered"  
else if [Delivery_Time_Actual] <= [Delivery_Time_Expected]  
then "On time" else "Late"
```

Before you continue

Delivered orders are On time or Late. Cancelled orders are Not delivered.

STEP 038

Create Time_Slot

Work in: Power Query Editor > Orders

1. Select Orders. Click Add Column > Custom Column.
2. In New column name, type Time_Slot.
3. Paste the formula below into Custom column formula without an opening =. Click OK.
4. Select the new column. Choose Transform > Data Type > Text.
5. Check the new values. Keep all order rows.

```
if Time.Hour([Order_Time]) >= 6 and Time.Hour([Order_Time]) < 11  
then "1 Breakfast"  
else if Time.Hour([Order_Time]) >= 11 and Time.Hour([Order_Time]) < 16  
then "2 Lunch"  
else if Time.Hour([Order_Time]) >= 16 and Time.Hour([Order_Time]) < 19  
then "3 Evening"  
else if Time.Hour([Order_Time]) >= 19 and Time.Hour([Order_Time]) < 23  
then "4 Dinner"  
else "5 Late night"
```

Before you continue

The five time labels include a sorting number. Midnight to 05:59 and 23:00 to 23:59 are Late night.

STEP 039

Prepare Items without repeating orders

Work in: Power Query Editor

1. Right-click qItems in the Queries list. Choose Reference. Rename the new query Items.
2. With Items selected, click Home > Merge Queries > Merge Queries.
3. Choose qMenu in the lower dropdown. Click Menu_ID in both tables.
4. Use Left Outer. Click OK. Expand the new qMenu column using the two-arrow button.
5. Keep only Item_Name, Category, Cuisine, Veg_NonVeg, Calories, and Cost_Price. Untick Use original column name as prefix. Click OK.
6. Rename the expanded Cuisine header to Item_Cuisine.
7. Leave Order_ID in Items. Do not add order-level revenue fields to this table.
8. Keep all 372,503 item rows, including items belonging to cancelled orders. Measures will apply the Delivered status through the relationship.

Menu cost is not Swiggy operating cost. The guide does not calculate company profit from menu prices.

Before you continue

Items has one row per Order_Item_ID. The Net_Amount_Item totals reconcile to the Subtotal field in Orders.

STEP 040

Create the Calendar table

Work in: Power Query Editor

1. Click Home > New Source > Other Sources > Blank Query. If needed, use Excel > Data > Get Data > From Other Sources > Blank Query.
2. Rename the blank query Calendar in Query Settings.
3. Click Home > Advanced Editor. Press Ctrl + A inside the code area to select its starter code.
4. Replace the starter code with the complete block below. Click Done.
5. Check that Date shows a calendar icon. Year and Month_Number should be whole numbers.

```
let
    StartDate = Date.StartOfYear(List.Min(Orders[Order_Date])),
    EndDate = Date.EndOfYear(List.Max(Orders[Order_Date])),
    Days = List.Dates(StartDate,
        Duration.Days(EndDate - StartDate) + 1,
        #duration(1, 0, 0, 0)),
    Dates = Table.FromList(Days, Splitter.SplitByNothing(), {"Date"}),
    Typed = Table.TransformColumnTypes(Dates, {"Date", type date}),
    Yr = Table.AddColumn(Typed, "Year", each Date.Year([Date]), Int64.Type),
    Mo = Table.AddColumn(Yr, "Month_Number", each Date.Month([Date]), Int64.Type),
    YM = Table.AddColumn(Mo, "YearMonth",
        each Date.ToText([Date], "yyyy-MM", "en-US"), type text),
    Qtr = Table.AddColumn(YM, "Quarter",
        each "Q" & Text.From(Date.QuarterOfYear([Date])), type text)
in
    Qtr
```

Before you continue

Calendar has 1,096 dates: 1 January 2024 to 31 December 2026. The empty months after June 2026 help you test a no-data selection.

STEP 041

Load only three tables into the model

Work in: Power Query Editor, then Excel

1. Select Orders. Click the arrow under Home > Close & Load > Close & Load To.
2. Select Only Create Connection. Tick Add this data to the Data Model. Click OK. Wait for the load to finish.
3. In Excel > Data > Queries & Connections, right-click Items > Load To. Choose Only Create Connection, tick Add this data to the Data Model, and click OK.
4. Repeat for Calendar. Wait until all three loads finish.
5. Keep the 14 queries whose names start with q as Connection only, without a Data Model load.
6. Click Power Pivot > Manage. At the bottom of that window, you should see Orders, Items, and Calendar.
7. Click each table and check its record count in the status area: Orders 200,000; Items 372,503; Calendar 1,096.
8. If Load To is unavailable inside the editor, close it and use the query right-click > Load To command in the Excel Queries & Connections pane.

Before you continue

The model contains only Orders, Items, and Calendar. The workbook sheets do not contain hundreds of thousands of pasted raw cells yet.

STEP 042

Create the two relationships

Work in: Excel > Data > Relationships

- 1. Close the Power Pivot window to return to Excel. Click Data > Relationships > New.
- 2. For Table choose Orders. For Column choose Order_Date.
- 3. For Related Table choose Calendar. For Related Column choose Date. Click OK.
- 4. Click New again. For Table choose Items. For Column choose Order_ID.
- 5. For Related Table choose Orders. For Related Column choose Order_ID. Click OK, then Close.
- 6. Click Power Pivot > Manage > Home > Diagram View. Check that Calendar is the 1 side of Orders, and Orders is the 1 side of Items.
- 7. If Excel already created exactly these relationships, keep them. Remove only an extra relationship you accidentally created in this project.
- 8. Return to Excel and save.

Many-side table / column	One-side table / column
Orders / Order_Date	Calendar / Date
Items / Order_ID	Orders / Order_ID

Use Calendar, city, and service filters for all analysis pages. Do not add an Items category slicer to the common order cards: an item filter does not travel back into Orders.

Microsoft: [Data Model relationships](#)

Before you continue

There are two active relationships, with no loop. Calendar filters Orders; Orders filters Items.

STEP 043

Create refreshable data checks

Work in: Power Query Editor

1. Create a Blank Query using Home > New Source > Other Sources > Blank Query. Name it DataChecks.
2. Open Home > Advanced Editor. Replace its starter code with the complete block on the next page, then click Done.
3. Click Home > Close & Load > Close & Load To. Choose Table > Existing worksheet > Checks!\$F\$2. Leave Add this data to the Data Model unticked.
4. After the load finishes, click the check table in Excel. On Table Design, change Table Name to tblDataChecks.
5. Select columns F:G and choose Home > Format > AutoFit Column Width.
6. Every Issues value must be 0. If any value is above 0, fix the corresponding type or merge before continuing.

These checks read the prepared data and do not feed the dashboard calculations. The Refresh button will update this check table too.

Before you continue

The five source checks are in Checks!F2:G7. They are separate from the benchmark checks you will put in columns A:D later.

STEP 044

Paste the data-check query

Work in: Power Query > DataChecks > Advanced Editor

```
let
    O = Table.Buffer(Orders),
    T = Table.Group(Items, {"Order_ID"},
        {"Item_Total", each List.Sum([Net_Amount_Item]), type number})),
    J = Table.NestedJoin(O, {"Order_ID"}, T, {"Order_ID"},
        "ItemCheck", JoinKind.LeftOuter),
    E = Table.ExpandTableColumn(J, "ItemCheck", {"Item_Total"}),
    Missing = Table.RowCount(Table.SelectRows(O, each
        [City_Name] = null or [Restaurant_Name] = null or
        [Gender] = null or [Vehicle_Type] = null or
        [Payment_Mode_Name] = null or [Net_Revenue_Swiggy] = null)),
    Amounts = Table.RowCount(Table.SelectRows(O, each
        Number.Abs([Grand_Total_Customer] -
            ([Subtotal] - [Discount_Customer] + [Delivery_Fee_Customer] +
            [Platform_Fee_Customer] + [Packaging_Fee_Customer])) > 0.011)),
    ItemDiff = Table.RowCount(Table.SelectRows(E, each
        [Item_Total] = null or
        Number.Abs([Item_Total] - [Subtotal]) > 0.011)),
    Result = #table({"Check", "Issues"}, {
        {"Duplicate order IDs", Table.RowCount(O) -
            List.Count(List.Distinct(O[Order_ID]))},
        {"Duplicate item IDs", Table.RowCount(Items) -
            List.Count(List.Distinct(Items[Order_Item_ID]))},
        {"Missing required lookup values", Missing},
        {"Customer total mismatches", Amounts},
        {"Item totals versus order subtotal", ItemDiff}
    }),
    Typed = Table.TransformColumnTypes(Result, {"Issues", Int64.Type})
in
    Typed
```

Before you continue

All five Issues values are 0 for the supplied files. This also verifies that item amounts reconcile to each order subtotal.

STEP 045

Create your first measure

Work in: Excel > Power Pivot

1. Click Power Pivot > Measures > New Measure. A measure is a calculation that updates when you use a filter.
2. In Table name, choose Orders. Store every measure in this guide under Orders, even when its formula reads Items.
3. In Measure name, type Total Orders.
4. In Formula, enter =COUNTROWS(Orders). If the box already contains =, do not type it twice.
5. Click Check Formula. Under Formatting Options, choose Number with 0 decimal places and a thousands separator. Click OK.
6. Use the next pages to add the other measures in the listed order. For each one, reopen Power Pivot > Measures > New Measure.
7. Paste only the formula block into Formula. Put the measure name in the separate Measure name box.
8. If a formula with commas is rejected by your regional settings, replace argument-separating commas with semicolons in DAX and worksheet formulas. Do not change Power Query code this way.

To fix a measure later: Power Pivot > Measures > Manage Measures > select its name > Edit.

Before you continue

Total Orders appears under Orders with a calculator icon. Do not create it as a calculated column.

STEP 046

Add measures 2 to 4

Work in: Power Pivot > Measures > New Measure

1. Add each measure below separately, from top to bottom. Use Orders as Table name.
2. Enter the exact name, paste its formula, click Check Formula, set the format, and click OK.
3. For currency, choose the rupee symbol and 2 decimals. For percentages use 1 decimal. For decimals use 2. For Date, use a date format if offered; otherwise leave General and format its worksheet result later.

Delivered Orders - format: Whole Number

```
=CALCULATE([Total Orders],  
    KEEPFILTERS(Orders[Status] = "Delivered"))
```

Cancelled Orders - format: Whole Number

```
=CALCULATE([Total Orders],  
    KEEPFILTERS(Orders[Status] = "Cancelled"))
```

Cancellation Rate - format: Percentage

```
=DIVIDE([Cancelled Orders], [Total Orders])
```

Before you continue

Each new measure appears with a calculator icon. There are no red formula errors.

STEP 047

Add measures 5 to 7

Work in: Power Pivot > Measures > New Measure

1. Add each measure below separately, from top to bottom. Use Orders as Table name.
2. Enter the exact name, paste its formula, click Check Formula, set the format, and click OK.
3. For currency, choose the rupee symbol and 2 decimals. For percentages use 1 decimal. For decimals use 2. For Date, use a date format if offered; otherwise leave General and format its worksheet result later.

Delivered Value - format: Currency

```
=CALCULATE(SUM(Orders[Grand_Total_Customer]),  
    KEEPFILTERS(Orders[Status] = "Delivered"))
```

Net Revenue - format: Currency

```
=CALCULATE(SUM(Orders[Net_Revenue_Swiggy]),  
    KEEPFILTERS(Orders[Status] = "Delivered"))
```

Average Order Value - format: Currency

```
=DIVIDE([Delivered Value], [Delivered Orders])
```

Before you continue

Each new measure appears with a calculator icon. There are no red formula errors.

STEP 048

Add measures 8 to 10

Work in: Power Pivot > Measures > New Measure

1. Add each measure below separately, from top to bottom. Use Orders as Table name.
2. Enter the exact name, paste its formula, click Check Formula, set the format, and click OK.
3. For currency, choose the rupee symbol and 2 decimals. For percentages use 1 decimal. For decimals use 2. For Date, use a date format if offered; otherwise leave General and format its worksheet result later.

Delivered Units - format: Whole Number

```
=CALCULATE(SUM(Items[Quantity]),  
    KEEPFILTERS(Orders[Status] = "Delivered"))
```

Average Delivery Minutes - format: Decimal

```
=CALCULATE(AVERAGE(Orders[Delivery_Time_Actual]),  
    KEEPFILTERS(Orders[Status] = "Delivered"))
```

On Time Orders - format: Whole Number

```
=CALCULATE([Delivered Orders],  
    KEEPFILTERS(Orders[Delivery_Band] = "On time"))
```

Before you continue

Each new measure appears with a calculator icon. There are no red formula errors.

STEP 049

Add measures 11 to 13

Work in: Power Pivot > Measures > New Measure

1. Add each measure below separately, from top to bottom. Use Orders as Table name.
2. Enter the exact name, paste its formula, click Check Formula, set the format, and click OK.
3. For currency, choose the rupee symbol and 2 decimals. For percentages use 1 decimal. For decimals use 2. For Date, use a date format if offered; otherwise leave General and format its worksheet result later.

On Time Rate - format: Percentage

```
=DIVIDE([On Time Orders], [Delivered Orders])
```

Active Customers - format: Whole Number

```
=DISTINCTCOUNT(Orders[Customer_ID])
```

Reviewed Orders - format: Whole Number

```
=CALCULATE(COUNT(Orders[Review_ID]),  
    KEEPFILTERS(Orders[Status] = "Delivered"))
```

Before you continue

Each new measure appears with a calculator icon. There are no red formula errors.

STEP 050

Add measures 14 to 16

Work in: Power Pivot > Measures > New Measure

1. Add each measure below separately, from top to bottom. Use Orders as Table name.
2. Enter the exact name, paste its formula, click Check Formula, set the format, and click OK.
3. For currency, choose the rupee symbol and 2 decimals. For percentages use 1 decimal. For decimals use 2. For Date, use a date format if offered; otherwise leave General and format its worksheet result later.

Food Rating - format: Decimal

```
=CALCULATE(AVERAGE(Orders[Food_Rating]),  
    KEEPFILTERS(Orders[Status] = "Delivered"))
```

Delivery Rating - format: Decimal

```
=CALCULATE(AVERAGE(Orders[Delivery_Rating]),  
    KEEPFILTERS(Orders[Status] = "Delivered"))
```

Positive Reviews - format: Whole Number

```
=CALCULATE([Reviewed Orders],  
    KEEPFILTERS(Orders[Sentiment] = "Positive"))
```

Before you continue

Each new measure appears with a calculator icon. There are no red formula errors.

STEP 051

Add measures 17 to 19

Work in: Power Pivot > Measures > New Measure

1. Add each measure below separately, from top to bottom. Use Orders as Table name.
2. Enter the exact name, paste its formula, click Check Formula, set the format, and click OK.
3. For currency, choose the rupee symbol and 2 decimals. For percentages use 1 decimal. For decimals use 2. For Date, use a date format if offered; otherwise leave General and format its worksheet result later.

Positive Review Rate - format: Percentage

```
=DIVIDE([Positive Reviews], [Reviewed Orders])
```

Review Coverage - format: Percentage

```
=DIVIDE([Reviewed Orders], [Delivered Orders])
```

Discounts - format: Currency

```
=CALCULATE(SUM(Orders[Discount_Customer]),  
    KEEPFILTERS(Orders[Status] = "Delivered"))
```

Before you continue

Each new measure appears with a calculator icon. There are no red formula errors.

STEP 052

Add measures 20 to 22

Work in: Power Pivot > Measures > New Measure

1. Add each measure below separately, from top to bottom. Use Orders as Table name.
2. Enter the exact name, paste its formula, click Check Formula, set the format, and click OK.
3. For currency, choose the rupee symbol and 2 decimals. For percentages use 1 decimal. For decimals use 2. For Date, use a date format if offered; otherwise leave General and format its worksheet result later.

Refund Amount - format: Currency

```
=SUM(Orders[Refund_Amount])
```

Refunded Orders - format: Whole Number

```
=CALCULATE([Total Orders],  
    KEEPFILTERS(Orders[Payment_Status] = "Refunded"))
```

Commission - format: Currency

```
=CALCULATE(SUM(Orders[Restaurant_Commission_Amount]),  
    KEEPFILTERS(Orders[Status] = "Delivered"))
```

Before you continue

Each new measure appears with a calculator icon. There are no red formula errors.

STEP 053

Add measures 23 to 25

Work in: Power Pivot > Measures > New Measure

1. Add each measure below separately, from top to bottom. Use Orders as Table name.
2. Enter the exact name, paste its formula, click Check Formula, set the format, and click OK.
3. For currency, choose the rupee symbol and 2 decimals. For percentages use 1 decimal. For decimals use 2. For Date, use a date format if offered; otherwise leave General and format its worksheet result later.

Restaurant Payout - format: Currency

```
=CALCULATE(SUM(Orders[Restaurant_Payout]),  
    KEEPFILTERS(Orders[Status] = "Delivered"))
```

Item Sales - format: Currency

```
=CALCULATE(SUM(Items[Net_Amount_Item]),  
    KEEPFILTERS(Orders[Status] = "Delivered"))
```

Items Sold - format: Whole Number

```
=CALCULATE(DISTINCTCOUNT(Items[Menu_ID]),  
    KEEPFILTERS(Orders[Status] = "Delivered"))
```

Before you continue

Each new measure appears with a calculator icon. There are no red formula errors.

STEP 054

Add measures 26 to 28

Work in: Power Pivot > Measures > New Measure

1. Add each measure below separately, from top to bottom. Use Orders as Table name.
2. Enter the exact name, paste its formula, click Check Formula, set the format, and click OK.
3. For currency, choose the rupee symbol and 2 decimals. For percentages use 1 decimal. For decimals use 2. For Date, use a date format if offered; otherwise leave General and format its worksheet result later.

Item Orders - format: Whole Number

```
=CALCULATE(DISTINCTCOUNT(Items[Order_ID]),  
    KEEPFILTERS(Orders[Status] = "Delivered"))
```

Units Per Order - format: Decimal

```
=DIVIDE([Delivered Units], [Item Orders])
```

Negative Revenue Orders - format: Whole Number

```
=CALCULATE([Delivered Orders],  
    KEEPFILTERS(Orders[Net_Revenue_Swiggy] < 0))
```

Before you continue

Each new measure appears with a calculator icon. There are no red formula errors.

STEP 055

Add measures 29 to 30

Work in: Power Pivot > Measures > New Measure

1. Add each measure below separately, from top to bottom. Use Orders as Table name.
2. Enter the exact name, paste its formula, click Check Formula, set the format, and click OK.
3. For currency, choose the rupee symbol and 2 decimals. For percentages use 1 decimal. For decimals use 2. For Date, use a date format if offered; otherwise leave General and format its worksheet result later.

Unique Orders - format: Whole Number

```
=DISTINCTCOUNT(Orders[Order_ID])
```

Latest Order Date - format: Date

```
=MAX(Orders[Order_Date])
```

Before you continue

Each new measure appears with a calculator icon. There are no red formula errors.

STEP 056

Create the master totals PivotTable

Work in: Excel > Pivots

1. Click Pivots and select B4 with the Name Box.
2. Click Insert > PivotTable. Choose From Data Model if it is shown. Otherwise choose From External Data Source > Choose Connection > Tables > This Workbook Data Model > Open.
3. Select Existing Worksheet and set Location to Pivots!\$B\$4. Click OK.
4. Click inside the pivot. On PivotTable Analyze, change PivotTable Name to ptKPI.
5. In PivotTable Fields, switch to All if needed. Expand Orders.
6. Drag every calculator-icon measure created in the previous pages into Values. Do not drag raw numeric columns.
7. If the measures run across many columns, drag the special Values field from Columns to Rows. Keep other row fields empty.
8. Right-click inside the pivot > PivotTable Options > Layout & Format. Untick Autofit column widths on update and tick Preserve cell formatting on update.
9. If the field list disappears, click PivotTable Analyze > Field List.

Before you continue

ptKPI displays the overall measures. Total Orders is 200,000; Net Revenue is 69,163,857.07; Delivered Value is 345,936,805.61.

STEP 057

Connect the worksheet cells to the pivot

Work in: KPI sheet

1. Click KPI. In A1 type Measure. In B1 type Value. In D1 type Card text.
2. For each row on the next pages, type its measure name into column A and paste its formula into column B.
3. Use the formula bar for formulas. Keep the sheet name Pivots and the pivot anchor \$B\$4 unchanged.
4. If GETPIVOTDATA gives an error, click ptKPI first. On PivotTable Analyze > Options dropdown, turn on Generate GetPivotData.
5. In an empty KPI cell, type =, click the corresponding value inside ptKPI, and press Enter. Excel writes the correct local GETPIVOTDATA formula. Use this if your installation generates different OLAP wording.
6. Do not type the displayed business totals into the card cells. The formulas keep the cards connected to filters.

Microsoft: [GETPIVOTDATA](#)

Before you continue

KPI cells obtain their numbers from ptKPI. The [Measures] part refers to the Data Model measure name.

STEP 058

Fill KPI rows 2 to 7

Work in: KPI sheet

A2: Total Orders B2: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Total Orders]",  
Pivots!$B$4),0)
```

A3: Delivered Value B3: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Delivered Value]",  
Pivots!$B$4),0)
```

A4: Net Revenue B4: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Net Revenue]",  
Pivots!$B$4),0)
```

A5: Average Order Value B5: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Average Order Value]",  
Pivots!$B$4),0)
```

A6: On Time Rate B6: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[On Time Rate]",  
Pivots!$B$4),0)
```

A7: Cancellation Rate B7: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Cancellation Rate]",  
Pivots!$B$4),0)
```

Before you continue

The names are in column A and the numeric formulas are in column B. Wrap the name column if needed.

STEP 059

Fill KPI rows 8 to 13

Work in: KPI sheet

A8: Delivered Orders B8: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Delivered Orders]",  
Pivots!$B$4),0)
```

A9: Cancelled Orders B9: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Cancelled Orders]",  
Pivots!$B$4),0)
```

A10: Delivered Units B10: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Delivered Units]",  
Pivots!$B$4),0)
```

A11: Average Delivery Minutes B11: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Average Delivery Minutes]",  
Pivots!$B$4),0)
```

A12: Active Customers B12: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Active Customers]",  
Pivots!$B$4),0)
```

A13: Reviewed Orders B13: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Reviewed Orders]",  
Pivots!$B$4),0)
```

Before you continue

The names are in column A and the numeric formulas are in column B. Wrap the name column if needed.

STEP 060

Fill KPI rows 14 to 19

Work in: KPI sheet

A14: Food Rating B14: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Food Rating]",  
Pivots!$B$4),0)
```

A15: Delivery Rating B15: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Delivery Rating]",  
Pivots!$B$4),0)
```

A16: Positive Reviews B16: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Positive Reviews]",  
Pivots!$B$4),0)
```

A17: Positive Review Rate B17: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Positive Review Rate]",  
Pivots!$B$4),0)
```

A18: Review Coverage B18: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Review Coverage]",  
Pivots!$B$4),0)
```

A19: Discounts B19: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Discounts]",  
Pivots!$B$4),0)
```

Before you continue

The names are in column A and the numeric formulas are in column B. Wrap the name column if needed.

STEP 061

Fill KPI rows 20 to 25

Work in: KPI sheet

A20: Refund Amount B20: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Refund Amount]",  
Pivots!$B$4),0)
```

A21: Refunded Orders B21: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Refunded Orders]",  
Pivots!$B$4),0)
```

A22: Commission B22: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Commission]",  
Pivots!$B$4),0)
```

A23: Restaurant Payout B23: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Restaurant Payout]",  
Pivots!$B$4),0)
```

A24: Item Sales B24: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Item Sales]",  
Pivots!$B$4),0)
```

A25: Items Sold B25: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Items Sold]",  
Pivots!$B$4),0)
```

Before you continue

The names are in column A and the numeric formulas are in column B. Wrap the name column if needed.

STEP 062

Fill KPI rows 26 to 31

Work in: KPI sheet

A26: Item Orders B26: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Item Orders]",  
Pivots!$B$4),0)
```

A27: Units Per Order B27: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Units Per Order]",  
Pivots!$B$4),0)
```

A28: Negative Revenue Orders B28: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Negative Revenue Orders]",  
Pivots!$B$4),0)
```

A29: Unique Orders B29: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Unique Orders]",  
Pivots!$B$4),0)
```

A30: Latest Order Date B30: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[Latest Order Date]",  
Pivots!$B$4),0)
```

A31: On Time Orders B31: paste this formula

```
=IFERROR(GETPIVOTDATA("[Measures].[On Time Orders]",  
Pivots!$B$4),0)
```

Before you continue

The names are in column A and the numeric formulas are in column B. Wrap the name column if needed.

STEP 063

Format the six summary cards

Work in: KPI sheet

1. Enter the six display formulas below into the named cells.
2. Cr means crore: the underlying rupee amount divided by 10,000,000. Column B keeps the full numeric amount.
3. Select B30. Press Ctrl + 1 > Number > Custom. Type dd mmm yyyy and click OK.
4. Do not use TEXT formulas as inputs for later calculations. Those calculations must use the numeric values in column B.

D2

```
=TEXT(B2,"#,##0")
```

D3

```
=TEXT(B3/10000000,"0.00")&" Cr"
```

D4

```
=TEXT(B4/10000000,"0.00")&" Cr"
```

D5

```
=IF(B8=0,"No orders",TEXT(B5,"₹#,##0"))
```

D6

```
=IF(B8=0,"No deliveries",TEXT(B6,"0.0%"))
```

D7

```
=IF(B2=0,"No orders",TEXT(B7,"0.0%"))
```

Before you continue

D2:D7 show 200,000; 34.59 Cr; 6.92 Cr; ₹1,841; 23.1%; and 6.0%.

STEP 064

Check the starting totals

Work in: Checks sheet

1. Make this check before creating filters. If filters already exist, clear them first.
2. Enter Metric, Actual, Expected, and Check in A1:D1.
3. Enter the rows below. In column B, link to the matching KPI cell. In column C, type the expected value.
4. In D2 enter `=IF(ABS(B2-C2)<0.01,"OK","Check")`. Copy D2 down for every populated row.
5. All checks must say OK before you start the dashboard design.

Metric	Actual formula	Expected
Total Orders	=KPI!B2	200,000
Unique Orders	=KPI!B29	200,000
Delivered Orders	=KPI!B8	187,925
Cancelled Orders	=KPI!B9	12,075
Delivered Value	=KPI!B3	345,936,805.61
Net Revenue	=KPI!B4	69,163,857.07
Delivered Units	=KPI!B10	524,899
Item Sales	=KPI!B24	339,124,497.01
Refund Amount	=KPI!B20	11,056,234.61
Reviewed Orders	=KPI!B13	37,553

These expected totals belong to the supplied files. After adding future data, the totals should change. Keep the uniqueness and reconciliation checks, and update the expected totals for the new source.

Before you continue

There are 200,000 unique orders and 372,503 item rows in the model. Delivered Units is 524,899; reviewed delivered orders is 37,553.

STEP 065

Create a small pivot to copy for charts

Work in: Pivots sheet

1. Select B60. Insert another PivotTable from This Workbook Data Model, using Existing Worksheet: Pivots!\$B\$60.
2. Name it ptSeed using PivotTable Analyze > PivotTable Name.
3. Add only the Total Orders measure to Values. Leave Rows, Columns, and Filters empty.
4. Right-click it > PivotTable Options > Layout & Format. Untick Autofit column widths on update; tick Preserve cell formatting on update.
5. This is the pivot you will copy for each chart. Do not copy the 30-measure ptKPI.

Before you continue

ptSeed at B60 contains only Total Orders. ptKPI at B4 still contains all measures.

STEP 066

Set the dashboard canvas

Work in: Overview sheet

1. Click Overview. On View, untick Gridlines and Headings. Keep the formula bar visible while building.
2. Select A:AW with the Name Box. Click Home > Format > Column Width. Enter 3.6 and click OK.
3. Select 1:48 with the Name Box. Click Home > Format > Row Height. Enter 15 and click OK.
4. Select A1:AW48. Set the font to Calibri, size 11. Set Fill Color > More Colors > Custom to RGB 243, 245, 248.
5. Select A1:F48. Set the fill to RGB 24, 33, 45. This is the sidebar.
6. Select B2:E3. Click Home > Merge & Center. Type SWIGGY. Set white font, bold, size 18.
7. Select B4:E5. Merge & Center. Type Dashboard project. Set white font, size 9.
8. Select H2:AG4. Merge & Center, then click Align Left and Middle Align. Type Business Overview. Set bold, size 23, font RGB 24, 33, 45.
9. Set zoom near 70% using the slider at the bottom right. Adjust it until A:AW fits your screen.

Before you continue

The sidebar is dark, the content area is light, and the title is readable. All dashboard elements will stay inside A1:AW48.

STEP 067

Build the clickable sidebar

Work in: Overview sheet

1. For each range below, select the range, click Home > Merge & Center, and paste its formula into the formula bar.
2. Set the text to Calibri 10, bold, white, with Middle Align. Set the fill to RGB 24, 33, 45.
3. Select B11:E13, the Overview button. Change its fill to orange: RGB 248, 107, 22.
4. Some destination sheets will be created later. The links to those names become usable after the sheet-copy step.
5. Select B42:E45. Merge & Center, enable Wrap Text, and type your full name, then press Alt + Enter and type Major project. Use white text, size 9.

Range	Formula
B7:E9	=HYPERLINK("#'Home'!A1","HOME")
B11:E13	=HYPERLINK("#'Overview'!A1","OVERVIEW")
B15:E17	=HYPERLINK("#'Restaurants'!A1","RESTAURANTS")
B19:E21	=HYPERLINK("#'Delivery'!A1","DELIVERY")
B23:E25	=HYPERLINK("#'Customers'!A1","CUSTOMERS")
B27:E29	=HYPERLINK("#'Payments'!A1","PAYMENTS")
B31:E33	=HYPERLINK("#'Products'!A1","PRODUCTS")
B35:E37	=HYPERLINK("#'Details'!A1","ORDER DETAILS")

These navigation buttons use worksheet hyperlinks and do not need VBA. To edit a hyperlink cell without opening it, select it using the Name Box.

Before you continue

Home and Overview links work now. The other link text exactly matches the future sheet names.

STEP 068

Create the first summary card

Work in: Overview sheet

1. Select H6:M10. Set Fill Color to white.
2. Press Ctrl + 1 > Border. Choose a thin line and a light grey color, RGB 221, 227, 235. Click Outline, then OK.
3. Select H6:M6. Merge & Center. Type Total orders. Set Calibri 9, bold, dark grey.
4. Select H7:M9. Merge & Center. Enter =KPI!D2. Set font size 22, bold, color RGB 24, 33, 45. Click Middle Align.
5. Select H10:M10. Merge & Center. Type All order statuses. Set font size 8, grey.
6. The whole card is 5 rows tall. Keep its text and value within H6:M10.

Before you continue

The first white card shows 200,000. Its value comes from a formula, so it can change with filters.

STEP 069

Complete the six summary cards

Work in: Overview sheet

1. Create each remaining card using the same method as the first card: white background, thin grey outline, title row, merged value rows, and caption row.
2. Use row 6 for the title, rows 7:9 for the value, and row 10 for the caption.
3. Use the labels, value formulas, and captions below. Apply the same font sizes as the first card.
4. Leave the single blank column between cards unchanged. Do not merge neighbouring cards together.

Columns	Title / value formula / caption
H:M	Total orders =KPI!D2 All order statuses
O:T	Delivered value (₹) =KPI!D3 Delivered orders
V:AA	Net revenue (₹) =KPI!D4 Dataset definition
AC:AH	Average order value =KPI!D5 Delivered orders
AJ:AO	On-time deliveries =KPI!D6 Actual ≤ expected
AQ:AV	Cancellation rate =KPI!D7 Cancelled / all orders

Before you continue

All six cards are aligned and show the verified totals. No card contains a typed business total.

STEP 070

Add city, service, and year filters

Work in: Pivots sheet, then Overview

1. Click inside ptKPI on Pivots. Click PivotTable Analyze > Insert Slicer.
2. In the field list, tick Orders > City_Name, Orders > Service_Type, and Calendar > Year. Click OK.
3. Select the City_Name slicer border. Press Ctrl + X. Click Overview, select H12, and press Ctrl + V.
4. Hold Alt while dragging the slicer border and corners so it fits H12:O18. Alt helps edges snap to cell boundaries.
5. Move Service_Type to Q12:X18 and Year to Z12:AF18 in the same way.
6. Select City_Name. On the Slicer tab, set Columns to 3. Set Button Height near 0.5 cm so all 12 cities fit.
7. Keep Service_Type and Year at 1 column. Adjust button height so their three choices fit.
8. Right-click each slicer > Slicer Settings. Change its caption to City, Service, or Year. Keep Display header ticked.
9. Do not hide items with no data. You need to see the complete list and the current selection.

[Microsoft: Slicers and report connections](#)

Before you continue

Clicking Mumbai changes the six cards. Clear that filter using the small funnel-with-X icon in the City slicer.

STEP 071

Add the date timeline

Work in: Pivots sheet, then Overview

1. Click inside ptKPI. Choose PivotTable Analyze > Insert Timeline.
2. Tick Calendar > Date and click OK. Use Calendar Date, not Order_Time.
3. Cut the timeline, paste it on Overview, and use Alt-drag to fit AH12:AV18.
4. In the timeline, open the time-level dropdown at the top right and choose Months.
5. Click one month to select it. Drag across month blocks to select a range.
6. Click the timeline clear-filter icon to return to all dates.
7. In H19:AV19, merge the cells, align left, and type Filters apply across the analysis pages. Use size 9 and grey text.

Before you continue

The timeline can filter months. Year and timeline filters work together, so clear both when returning to the full period.

STEP 072

Give the filters one consistent style

Work in: Overview sheet

1. Click a slicer. On the Slicer tab, open the Slicer Styles gallery using its small More arrow.
2. Choose New Slicer Style. Name it Swiggy Orange.
3. Select Whole Slicer > Format. Set white fill and a thin light-grey border.
4. Select Header > Format. Choose bold dark text, size 10, and white fill.
5. Select Selected Item with Data > Format. Choose orange fill and white bold text.
6. Select Unselected Item with Data > Format. Choose a very light grey fill and dark text.
7. Select Unselected Item with No Data > Format. Use light grey text and white fill.
8. Click OK to save the style. Apply Swiggy Orange to each slicer from the style gallery.
9. For the timeline, select a light neutral built-in Timeline Style. Keep it readable; its selected range may use the theme accent.

Custom slicer styles use the element names above in Excel 2021. Hover styles are optional; no hover effect is required for filtering to work.

Before you continue

Selected slicer buttons are clearly different from unselected buttons. Labels remain readable.

STEP 073

Add the page footer and print area

Work in: Overview sheet

1. Select H47:AV48. Merge the cells, turn on Wrap Text, and align left and middle. Set Calibri 9 and grey text.
2. Paste the footer formula below.
3. Select A1:AW48. Click Page Layout > Print Area > Set Print Area.
4. Choose Page Layout > Orientation > Landscape, Size > A3, and Margins > Narrow. If A3 is unavailable, use A4.
5. Under Page Layout > Scale to Fit, set Width to 1 page and Height to 1 page.
6. Click File > Print. Check that the whole frame fits. Press Esc to return.
7. Do not hide the ribbon or formula bar while building.

```
=IF(KPI!B2=0,"No orders in this selection",  
"Latest selected order: "&TEXT(KPI!B30,"dd mmm yyyy")  
&" | Delivered units: "&TEXT(KPI!B10,"#,##0"))
```

Before you continue

The footer is linked to the selection. The printable area is one dashboard page.

STEP 074

Copy the frame for the other pages

Work in: Overview sheet tab

1. Right-click the Overview sheet tab. Choose Move or Copy.
2. Tick Create a copy. Choose (move to end) and click OK.
3. Rename the copied sheet Restaurants.
4. Repeat by copying Overview four more times. Name the copies Delivery, Customers, Payments, and Products.
5. On each copy, change H2:AG4 to the page title in the table below.
6. On each copy, return the Overview navigation cell B11:E13 to the dark sidebar fill. Make that page's own navigation range orange.
7. Arrange the tabs in this order: Home, Overview, Restaurants, Delivery, Customers, Payments, Products, Details, Pivots, KPI, Checks.
8. Test every sidebar link once. The destination sheets now exist.

Sheet	Page title	Orange navigation range
Restaurants	Restaurant Performance	B15:E17
Delivery	Delivery Performance	B19:E21
Customers	Customer Experience	B23:E25
Payments	Payments and Revenue	B27:E29
Products	Menu and Item Sales	B31:E33

Before you continue

All six analysis pages have the same frame, cards, and filter controls. The copies share the slicer selections.

STEP 075

Learn the chart-building pattern

Work in: Pivots sheet, then the named dashboard

1. Every chart page below starts by copying ptSeed at B60. Click inside it, then PivotTable Analyze > Select > Entire PivotTable. Press Ctrl + C.
2. Paste at the exact Pivots cell shown on the chart page. Rename the new pivot to the given pt number.
3. In Values, remove Total Orders unless that is the required measure. Drag the required calculator-icon measure into Values.
4. Drag the required category field into Rows. Keep Columns and Filters empty.
5. Use PivotTable Design > Subtotals > Do Not Show Subtotals, and Grand Totals > Off for Rows and Columns.
6. Apply the sorting or Top 10 filter described on that chart page.
7. Click inside the new pivot. Choose PivotTable Analyze > PivotChart. Select the chart type shown.
8. Click the chart border. Choose Chart Design > Move Chart > Object in, select its dashboard sheet, and click OK.
9. On the destination sheet, hold Alt while moving and resizing the chart so it fits the given cell range.
10. Right-click any grey field button on the chart > Hide All Field Buttons on Chart. You will use the slicers instead.

Before you continue

Chart pivot locations are 100 rows apart so their rows cannot overlap. Always copy ptSeed, not an existing chart pivot.

STEP 076

Chart 01: overview analysis

Work in: Pivots!B100 -> Overview!H20:AA32

1. Copy ptSeed at B60 and paste it at Pivots!B100. Rename this new pivot pt01.
2. Put Calendar > YearMonth in Rows. Put the Delivered Value measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Right-click a YearMonth label > Sort > Sort A to Z. Keep chronological label order; do not sort by value.
5. Click PivotTable Analyze > PivotChart. Choose Line with Markers. Click OK.
6. Use Chart Design > Move Chart > Object in > Overview. Click OK.
7. On Overview, use Alt-drag to fit the chart inside H20:AA32.
8. Click the chart title and type: Monthly delivered value (₹ million).
9. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Before you continue

pt01 uses YearMonth and Delivered Value. Its chart is in H20:AA32. Connect it to the slicers after all 24 charts exist.

STEP 077

Chart 02: overview analysis

Work in: Pivots!B200 -> Overview!AC20:AV32

1. Copy ptSeed at B60 and paste it at Pivots!B200. Rename this new pivot pt02.
2. Put Orders > City_Name in Rows. Put the Delivered Value measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Open the Row Labels dropdown > Value Filters > Top 10. Set Top, 8, Items, by Delivered Value. Click OK.
5. Right-click one numeric value in the pivot > Sort > Sort Largest to Smallest.
6. Click PivotTable Analyze > PivotChart. Choose Clustered Bar. Click OK.
7. Use Chart Design > Move Chart > Object in > Overview. Click OK.
8. On Overview, use Alt-drag to fit the chart inside AC20:AV32.
9. Click the chart title and type: Top cities by delivered value (₹ million).
10. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Before you continue

pt02 uses City_Name and Delivered Value. Its chart is in AC20:AV32. Connect it to the slicers after all 24 charts exist.

STEP 078

Chart 03: overview analysis

Work in: Pivots!B300 -> Overview!H34:AA46

1. Copy ptSeed at B60 and paste it at Pivots!B300. Rename this new pivot pt03.
2. Put Orders > Service_Type in Rows. Put the Total Orders measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Right-click one numeric value in the pivot > Sort > Sort Largest to Smallest.
5. Click PivotTable Analyze > PivotChart. Choose Doughnut. Click OK.
6. Use Chart Design > Move Chart > Object in > Overview. Click OK.
7. On Overview, use Alt-drag to fit the chart inside H34:AA46.
8. Click the chart title and type: Orders by service.
9. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Before you continue

pt03 uses Service_Type and Total Orders. Its chart is in H34:AA46. Connect it to the slicers after all 24 charts exist.

STEP 079

Chart 04: overview analysis

Work in: Pivots!B400 -> Overview!AC34:AV46

1. Copy ptSeed at B60 and paste it at Pivots!B400. Rename this new pivot pt04.
2. Put Orders > Coupon_Label in Rows. Put the Discounts measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Right-click one numeric value in the pivot > Sort > Sort Largest to Smallest.
5. Click PivotTable Analyze > PivotChart. Choose Clustered Bar. Click OK.
6. Use Chart Design > Move Chart > Object in > Overview. Click OK.
7. On Overview, use Alt-drag to fit the chart inside AC34:AV46.
8. Click the chart title and type: Customer discounts by coupon (₹ million).
9. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Before you continue

pt04 uses Coupon_Label and Discounts. Its chart is in AC34:AV46. Connect it to the slicers after all 24 charts exist.

STEP 080

Chart 05: restaurants analysis

Work in: Pivots!B500 -> Restaurants!H20:AA32

1. Copy ptSeed at B60 and paste it at Pivots!B500. Rename this new pivot pt05.
2. Put Orders > Restaurant_Name in Rows. Put the Delivered Value measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Open the Row Labels dropdown > Value Filters > Top 10. Set Top, 10, Items, by Delivered Value. Click OK.
5. Right-click one numeric value in the pivot > Sort > Sort Largest to Smallest.
6. Click PivotTable Analyze > PivotChart. Choose Clustered Bar. Click OK.
7. Use Chart Design > Move Chart > Object in > Restaurants. Click OK.
8. On Restaurants, use Alt-drag to fit the chart inside H20:AA32.
9. Click the chart title and type: Top 10 restaurants by delivered value (₹ million).
10. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Before you continue

pt05 uses Restaurant_Name and Delivered Value. Its chart is in H20:AA32. Connect it to the slicers after all 24 charts exist.

STEP 081

Chart 06: restaurants analysis

Work in: Pivots!B600 -> Restaurants!AC20:AV32

1. Copy ptSeed at B60 and paste it at Pivots!B600. Rename this new pivot pt06.
2. Put Orders > Restaurant_Cuisine in Rows. Put the Delivered Value measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Open the Row Labels dropdown > Value Filters > Top 10. Set Top, 8, Items, by Delivered Value. Click OK.
5. Right-click one numeric value in the pivot > Sort > Sort Largest to Smallest.
6. Click PivotTable Analyze > PivotChart. Choose Clustered Bar. Click OK.
7. Use Chart Design > Move Chart > Object in > Restaurants. Click OK.
8. On Restaurants, use Alt-drag to fit the chart inside AC20:AV32.
9. Click the chart title and type: Top cuisines by delivered value (₹ million).
10. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Before you continue

pt06 uses Restaurant_Cuisine and Delivered Value. Its chart is in AC20:AV32. Connect it to the slicers after all 24 charts exist.

STEP 082

Chart 07: restaurants analysis

Work in: Pivots!B700 -> Restaurants!H34:AA46

1. Copy ptSeed at B60 and paste it at Pivots!B700. Rename this new pivot pt07.
2. Put Orders > Partner_Type in Rows. Put the Net Revenue measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Right-click one numeric value in the pivot > Sort > Sort Largest to Smallest.
5. Click PivotTable Analyze > PivotChart. Choose Clustered Column. Click OK.
6. Use Chart Design > Move Chart > Object in > Restaurants. Click OK.
7. On Restaurants, use Alt-drag to fit the chart inside H34:AA46.
8. Click the chart title and type: Net revenue by partner type (₹ million).
9. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Before you continue

pt07 uses Partner_Type and Net Revenue. Its chart is in H34:AA46. Connect it to the slicers after all 24 charts exist.

STEP 083

Chart 08: restaurants analysis

Work in: Pivots!B800 -> Restaurants!AC34:AV46

1. Copy ptSeed at B60 and paste it at Pivots!B800. Rename this new pivot pt08.
2. Put Orders > Price_Range in Rows. Put the Delivered Value measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Right-click one numeric value in the pivot > Sort > Sort Largest to Smallest.
5. Click PivotTable Analyze > PivotChart. Choose Doughnut. Click OK.
6. Use Chart Design > Move Chart > Object in > Restaurants. Click OK.
7. On Restaurants, use Alt-drag to fit the chart inside AC34:AV46.
8. Click the chart title and type: Delivered value by price range.
9. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Before you continue

pt08 uses Price_Range and Delivered Value. Its chart is in AC34:AV46. Connect it to the slicers after all 24 charts exist.

STEP 084

Chart 09: delivery analysis

Work in: Pivots!B900 -> Delivery!H20:AA32

1. Copy ptSeed at B60 and paste it at Pivots!B900. Rename this new pivot pt09.
2. Put Orders > Service_Type in Rows. Put the Average Delivery Minutes measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Right-click one numeric value in the pivot > Sort > Sort Largest to Smallest.
5. Click PivotTable Analyze > PivotChart. Choose Clustered Column. Click OK.
6. Use Chart Design > Move Chart > Object in > Delivery. Click OK.
7. On Delivery, use Alt-drag to fit the chart inside H20:AA32.
8. Click the chart title and type: Average delivery time by service (minutes).
9. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Before you continue

pt09 uses Service_Type and Average Delivery Minutes. Its chart is in H20:AA32. Connect it to the slicers after all 24 charts exist.

STEP 085

Chart 10: delivery analysis

Work in: Pivots!B1000 -> Delivery!AC20:AV32

1. Copy ptSeed at B60 and paste it at Pivots!B1000. Rename this new pivot pt10.
2. Put Orders > City_Name in Rows. Put the On Time Rate measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Right-click one numeric value in the pivot > Sort > Sort Largest to Smallest.
5. Click PivotTable Analyze > PivotChart. Choose Clustered Bar. Click OK.
6. Use Chart Design > Move Chart > Object in > Delivery. Click OK.
7. On Delivery, use Alt-drag to fit the chart inside AC20:AV32.
8. Click the chart title and type: On-time rate by city.
9. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Before you continue

pt10 uses City_Name and On Time Rate. Its chart is in AC20:AV32. Connect it to the slicers after all 24 charts exist.

STEP 086

Chart 11: delivery analysis

Work in: Pivots!B1100 -> Delivery!H34:AA46

1. Copy ptSeed at B60 and paste it at Pivots!B1100. Rename this new pivot pt11.
2. Put Orders > Traffic_Level in Rows. Put the Average Delivery Minutes measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Right-click one numeric value in the pivot > Sort > Sort Largest to Smallest.
5. Click PivotTable Analyze > PivotChart. Choose Clustered Column. Click OK.
6. Use Chart Design > Move Chart > Object in > Delivery. Click OK.
7. On Delivery, use Alt-drag to fit the chart inside H34:AA46.
8. Click the chart title and type: Average delivery time by traffic (minutes).
9. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Before you continue

pt11 uses Traffic_Level and Average Delivery Minutes. Its chart is in H34:AA46. Connect it to the slicers after all 24 charts exist.

STEP 087

Chart 12: delivery analysis

Work in: Pivots!B1200 -> Delivery!AC34:AV46

1. Copy ptSeed at B60 and paste it at Pivots!B1200. Rename this new pivot pt12.
2. Put Orders > Delivery_Band in Rows. Put the Delivered Orders measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Right-click one numeric value in the pivot > Sort > Sort Largest to Smallest.
5. Click PivotTable Analyze > PivotChart. Choose Doughnut. Click OK.
6. Use Chart Design > Move Chart > Object in > Delivery. Click OK.
7. On Delivery, use Alt-drag to fit the chart inside AC34:AV46.
8. Click the chart title and type: Delivered orders: on time or late.
9. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Leave Show items with no data off. A blank category should not appear because the measure counts only the relevant orders.

Before you continue

pt12 uses Delivery_Band and Delivered Orders. Its chart is in AC34:AV46. Connect it to the slicers after all 24 charts exist.

STEP 088

Chart 13: customers analysis

Work in: Pivots!B1300 -> Customers!H20:AA32

1. Copy ptSeed at B60 and paste it at Pivots!B1300. Rename this new pivot pt13.
2. Put Orders > Age_Group in Rows. Put the Active Customers measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Right-click a Age_Group label > Sort > Sort A to Z. Keep chronological label order; do not sort by value.
5. Click PivotTable Analyze > PivotChart. Choose Clustered Bar. Click OK.
6. Use Chart Design > Move Chart > Object in > Customers. Click OK.
7. On Customers, use Alt-drag to fit the chart inside H20:AA32.
8. Click the chart title and type: Active customers by age group.
9. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Active Customers is a distinct count of Customer_ID. The same customer may order in different periods; do not add monthly distinct counts to get an annual total.

Before you continue

pt13 uses Age_Group and Active Customers. Its chart is in H20:AA32. Connect it to the slicers after all 24 charts exist.

STEP 089

Chart 14: customers analysis

Work in: Pivots!B1400 -> Customers!AC20:AV32

1. Copy ptSeed at B60 and paste it at Pivots!B1400. Rename this new pivot pt14.
2. Put Orders > Membership in Rows. Put the Delivered Value measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Right-click one numeric value in the pivot > Sort > Sort Largest to Smallest.
5. Click PivotTable Analyze > PivotChart. Choose Doughnut. Click OK.
6. Use Chart Design > Move Chart > Object in > Customers. Click OK.
7. On Customers, use Alt-drag to fit the chart inside AC20:AV32.
8. Click the chart title and type: Delivered value by membership.
9. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Before you continue

pt14 uses Membership and Delivered Value. Its chart is in AC20:AV32. Connect it to the slicers after all 24 charts exist.

STEP 090

Chart 15: customers analysis

Work in: Pivots!B1500 -> Customers!H34:AA46

1. Copy ptSeed at B60 and paste it at Pivots!B1500. Rename this new pivot pt15.
2. Put Orders > Sentiment in Rows. Put the Reviewed Orders measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Right-click one numeric value in the pivot > Sort > Sort Largest to Smallest.
5. Click PivotTable Analyze > PivotChart. Choose Clustered Column. Click OK.
6. Use Chart Design > Move Chart > Object in > Customers. Click OK.
7. On Customers, use Alt-drag to fit the chart inside H34:AA46.
8. Click the chart title and type: Reviews on delivered orders by sentiment.
9. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Leave Show items with no data off. A blank category should not appear because the measure counts only the relevant orders.

Before you continue

pt15 uses Sentiment and Reviewed Orders. Its chart is in H34:AA46. Connect it to the slicers after all 24 charts exist.

STEP 091

Chart 16: customers analysis

Work in: Pivots!B1600 -> Customers!AC34:AV46

1. Copy ptSeed at B60 and paste it at Pivots!B1600. Rename this new pivot pt16.
2. Put Orders > Service_Type in Rows. Put the Food Rating measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Right-click one numeric value in the pivot > Sort > Sort Largest to Smallest.
5. Click PivotTable Analyze > PivotChart. Choose Clustered Column. Click OK.
6. Use Chart Design > Move Chart > Object in > Customers. Click OK.
7. On Customers, use Alt-drag to fit the chart inside AC34:AV46.
8. Click the chart title and type: Food rating by service (out of 5).
9. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Use a fixed 0 to 5 rating axis. These ratings cover reviewed, delivered orders, not all orders.

Before you continue

pt16 uses Service_Type and Food Rating. Its chart is in AC34:AV46. Connect it to the slicers after all 24 charts exist.

STEP 092

Chart 17: payments analysis

Work in: Pivots!B1700 -> Payments!H20:AA32

1. Copy ptSeed at B60 and paste it at Pivots!B1700. Rename this new pivot pt17.
2. Put Calendar > YearMonth in Rows. Put the Net Revenue measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Right-click a YearMonth label > Sort > Sort A to Z. Keep chronological label order; do not sort by value.
5. Click PivotTable Analyze > PivotChart. Choose Line with Markers. Click OK.
6. Use Chart Design > Move Chart > Object in > Payments. Click OK.
7. On Payments, use Alt-drag to fit the chart inside H20:AA32.
8. Click the chart title and type: Monthly net revenue (₹ million).
9. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Before you continue

pt17 uses YearMonth and Net Revenue. Its chart is in H20:AA32. Connect it to the slicers after all 24 charts exist.

STEP 093

Chart 18: payments analysis

Work in: Pivots!B1800 -> Payments!AC20:AV32

1. Copy ptSeed at B60 and paste it at Pivots!B1800. Rename this new pivot pt18.
2. Put Orders > Payment_Mode_Name in Rows. Put the Total Orders measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Right-click one numeric value in the pivot > Sort > Sort Largest to Smallest.
5. Click PivotTable Analyze > PivotChart. Choose Clustered Bar. Click OK.
6. Use Chart Design > Move Chart > Object in > Payments. Click OK.
7. On Payments, use Alt-drag to fit the chart inside AC20:AV32.
8. Click the chart title and type: Orders by payment method.
9. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Before you continue

pt18 uses Payment_Mode_Name and Total Orders. Its chart is in AC20:AV32. Connect it to the slicers after all 24 charts exist.

STEP 094

Chart 19: payments analysis

Work in: Pivots!B1900 -> Payments!H34:AA46

1. Copy ptSeed at B60 and paste it at Pivots!B1900. Rename this new pivot pt19.
2. Put Orders > Payment_Status in Rows. Put the Total Orders measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Right-click one numeric value in the pivot > Sort > Sort Largest to Smallest.
5. Click PivotTable Analyze > PivotChart. Choose Doughnut. Click OK.
6. Use Chart Design > Move Chart > Object in > Payments. Click OK.
7. On Payments, use Alt-drag to fit the chart inside H34:AA46.
8. Click the chart title and type: Payment status across all orders.
9. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Before you continue

pt19 uses Payment_Status and Total Orders. Its chart is in H34:AA46. Connect it to the slicers after all 24 charts exist.

STEP 095

Chart 20: payments analysis

Work in: Pivots!B2000 -> Payments!AC34:AV46

1. Copy ptSeed at B60 and paste it at Pivots!B2000. Rename this new pivot pt20.
2. Put Orders > Cancellation_Reason in Rows. Put the Cancelled Orders measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Right-click one numeric value in the pivot > Sort > Sort Largest to Smallest.
5. Click PivotTable Analyze > PivotChart. Choose Clustered Bar. Click OK.
6. Use Chart Design > Move Chart > Object in > Payments. Click OK.
7. On Payments, use Alt-drag to fit the chart inside AC34:AV46.
8. Click the chart title and type: Cancelled orders by reason.
9. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Leave Show items with no data off. A blank category should not appear because the measure counts only the relevant orders.

Before you continue

pt20 uses Cancellation_Reason and Cancelled Orders. Its chart is in AC34:AV46. Connect it to the slicers after all 24 charts exist.

STEP 096

Chart 21: products analysis

Work in: Pivots!B2100 -> Products!H20:AA32

1. Copy ptSeed at B60 and paste it at Pivots!B2100. Rename this new pivot pt21.
2. Put Items > Category in Rows. Put the Delivered Units measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Right-click one numeric value in the pivot > Sort > Sort Largest to Smallest.
5. Click PivotTable Analyze > PivotChart. Choose Clustered Bar. Click OK.
6. Use Chart Design > Move Chart > Object in > Products. Click OK.
7. On Products, use Alt-drag to fit the chart inside H20:AA32.
8. Click the chart title and type: Delivered units by menu category.
9. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Before you continue

pt21 uses Category and Delivered Units. Its chart is in H20:AA32. Connect it to the slicers after all 24 charts exist.

STEP 097

Chart 22: products analysis

Work in: Pivots!B2200 -> Products!AC20:AV32

1. Copy ptSeed at B60 and paste it at Pivots!B2200. Rename this new pivot pt22.
2. Put Items > Item_Cuisine in Rows. Put the Item Sales measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Open the Row Labels dropdown > Value Filters > Top 10. Set Top, 8, Items, by Item Sales. Click OK.
5. Right-click one numeric value in the pivot > Sort > Sort Largest to Smallest.
6. Click PivotTable Analyze > PivotChart. Choose Clustered Bar. Click OK.
7. Use Chart Design > Move Chart > Object in > Products. Click OK.
8. On Products, use Alt-drag to fit the chart inside AC20:AV32.
9. Click the chart title and type: Top item cuisines by item sales (₹ million).
10. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Item Sales includes item GST and item discounts, before order-level coupon discounts and customer fees. It is not Swiggy revenue.

Before you continue

pt22 uses Item_Cuisine and Item Sales. Its chart is in AC20:AV32. Connect it to the slicers after all 24 charts exist.

STEP 098

Chart 23: products analysis

Work in: Pivots!B2300 -> Products!H34:AA46

1. Copy ptSeed at B60 and paste it at Pivots!B2300. Rename this new pivot pt23.
2. Put Items > Veg_NonVeg in Rows. Put the Delivered Units measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Right-click one numeric value in the pivot > Sort > Sort Largest to Smallest.
5. Click PivotTable Analyze > PivotChart. Choose Doughnut. Click OK.
6. Use Chart Design > Move Chart > Object in > Products. Click OK.
7. On Products, use Alt-drag to fit the chart inside H34:AA46.
8. Click the chart title and type: Delivered units: veg and non-veg.
9. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

Before you continue

pt23 uses Veg_NonVeg and Delivered Units. Its chart is in H34:AA46. Connect it to the slicers after all 24 charts exist.

STEP 099

Chart 24: products analysis

Work in: Pivots!B2400 -> Products!AC34:AV46

1. Copy ptSeed at B60 and paste it at Pivots!B2400. Rename this new pivot pt24.
2. Put Items > Item_Name in Rows. Put the Delivered Units measure from Orders in Values. Remove Total Orders if it is not the required measure.
3. Set Design > Subtotals > Do Not Show Subtotals and Grand Totals > Off for Rows and Columns.
4. Open the Row Labels dropdown > Value Filters > Top 10. Set Top, 10, Items, by Delivered Units. Click OK.
5. Right-click one numeric value in the pivot > Sort > Sort Largest to Smallest.
6. Click PivotTable Analyze > PivotChart. Choose Clustered Bar. Click OK.
7. Use Chart Design > Move Chart > Object in > Products. Click OK.
8. On Products, use Alt-drag to fit the chart inside AC34:AV46.
9. Click the chart title and type: Top 10 menu items by delivered units.
10. Hide All Field Buttons on Chart. Apply the matching formatting page that follows this chart section.

The file uses Item_ identifiers as names. Keep them. A Top 10 filter can display extra rows when the last value is tied.

Before you continue

pt24 uses Item_Name and Delivered Units. Its chart is in AC34:AV46. Connect it to the slicers after all 24 charts exist.

STEP 100

Format the bar, column, and line charts

Work in: All six analysis pages

1. Click a chart border. Right-click > Format Chart Area. Under Fill & Line, use Solid fill: White and Border: No line.
2. Click the chart title. Set Calibri 11, bold, dark text. If a long title wraps, keep it to two lines inside the chart.
3. Click a value-axis label. Right-click > Format Axis. Set Minimum to 0. Leave Maximum on Auto unless the chart is a percentage or rating.
4. For rupee charts labelled ₹ million, set Display units to Millions. Untick Show display units label on chart. Under Number, untick Linked to source and use 0.0.
5. For count charts, use #,##0. For minutes, use 0.0. For percentage charts set Minimum 0, Maximum 1, and Number 0%. For ratings use Minimum 0, Maximum 5, Number 0.0.
6. Click a bar or column once to select the whole series. Format Data Series > Fill > Solid fill: orange RGB 248, 107, 22. Set Border to No line and Gap Width near 55%.
7. For horizontal bar charts, right-click a category-axis label > Format Axis > Categories in reverse order. The first PivotTable category will appear at the top.
8. For line charts, use orange line width 2 pt, marker size 3. Keep the month labels in yyyy-MM order.
9. Use Chart Design > Add Chart Element > Legend > None for single-series bar, column, and line charts.
10. Keep only light major value gridlines. Use font size 9 or 10 on axes; remove labels that overlap instead of shrinking everything.

Before you continue

Money charts say ₹ million, rating charts use 0-5, and rate charts use 0-100%. No chart shows a 3-D effect.

STEP 101

Format the doughnut charts

Work in: Overview, Restaurants, Delivery, Customers, Payments, Products

1. Give each doughnut chart a white background and no outer border.
2. Right-click the ring > Format Data Series > Series Options. Set Doughnut Hole Size to 65%.
3. Click one slice, then click it again to select that single data point. Set its fill color.
4. Use orange RGB 248,107,22 for the first category, dark charcoal RGB 24,33,45 for the second, and teal RGB 0,135,121 for the third. Use grey for additional categories.
5. Choose Chart Design > Add Chart Element > Data Labels > Best Fit. Right-click a label > Format Data Labels. Tick Percentage and untick Value.
6. Choose Chart Design > Add Chart Element > Legend > Bottom. Use Calibri 9 or 10.
7. If labels overlap, remove data labels and keep the legend. Hovering over a slice still shows its value in Excel.
8. Keep the chart title short enough to fit without covering the ring.

Before you continue

Doughnuts show composition clearly and use consistent colors. They remain native PivotCharts.

STEP 102

Connect every pivot to the same filters

Work in: Overview sheet

1. Click the City slicer border. On the Slicer tab, click Report Connections. This may be named PivotTable Connections.
2. Tick ptKPI and every chart pivot from pt01 through pt24. Also tick ptSeed if it appears. Click OK.
3. Repeat the same Report Connections step for the Service slicer.
4. Repeat for the Year slicer.
5. Click the timeline border. On the Timeline tab, click Report Connections. Tick the same pivots and click OK.
6. If a pivot is missing from the list, check that it was created from This Workbook Data Model. Recreate that pivot from ptSeed and reconnect it.
7. Choose Mumbai on Overview. Open Restaurants and Products. Their copied slicers should show Mumbai and their charts should change.
8. Clear the City filter before continuing.

Clicking a chart bar selects that bar; it does not filter other charts in this Excel design. Use the slicer buttons and timeline for filtering.

Before you continue

All four filters control ptKPI and all 24 chart pivots. The copied filter controls share the same selections.

STEP 103

Add useful page-specific card values

Work in: Customers and Products sheets

1. On Customers, keep the first card as Total orders. Change the other five cards using the mappings below.
2. Change only each card title, value formula, and caption. Keep the same merged ranges, fill colors, and font sizes.
3. On Products, replace all six cards using its mappings on the next page.
4. These cells still read the shared ptKPI, so city, service, year, and timeline filters continue to work.

Customer card columns	Title / value formula / caption
O:T	Active customers =TEXT(KPI!B12,"#,##0") Distinct IDs, all orders
V:AA	Reviewed orders =TEXT(KPI!B13,"#,##0") Delivered orders only
AC:AH	Food rating =IF(KPI!B13=0,"No reviews",TEXT(KPI!B14,"0.00")) Out of 5
Aj:AO	Positive reviews =IF(KPI!B13=0,"No reviews",TEXT(KPI!B17,"0.0%")) Share of reviewed deliveries
AQ:AV	Review coverage =IF(KPI!B8=0,"No deliveries",TEXT(KPI!B18,"0.0%")) Reviewed / delivered orders

Before you continue

With no filters, Customers shows 24,962 active customers, 37,553 reviewed orders, food rating 3.07, positive reviews 42.2%, and coverage 20.0%.

STEP 104

Set the six product cards

Work in: Products sheet

1. Use row 6 for each title, rows 7:9 for the formula, and row 10 for the caption.
2. Enter the mappings below. Keep the same layout and formatting as the original cards.
3. Do not rename Item Sales to Swiggy revenue. The two amounts measure different things.

Columns	Title / value formula / caption
H:M	Delivered units =TEXT(KPI!B10,"#,##0") Sum of item quantities
O:T	Item sales (₹) =TEXT(KPI!B24/10000000,"0.00")&" Cr" Item net amount incl. GST
V:AA	Orders with items =TEXT(KPI!B26,"#,##0") Delivered orders
AC:AH	Menu items sold =TEXT(KPI!B25,"#,##0") Distinct Menu_ID
AJ:AO	Units per order =IF(KPI!B26=0,"No orders",TEXT(KPI!B27,"0.00")) Units / delivered item orders
AQ:AV	Average order value =KPI!D5 Customer order total

Before you continue

With no filters, Products shows 524,899 units; item sales 33.91 Cr; 187,925 item orders; 39,560 menu items sold; and 2.79 units per order.

STEP 105

Create the Order Details table

Work in: Power Query Editor > Orders

- 1. Open Power Query Editor. Right-click Orders > Reference. Name the new query OrderDetails.
- 2. Click Home > Choose Columns. Keep only the 13 columns below.
- 3. Drag the column headers into the exact order shown, from left to right.
- 4. Click Home > Close & Load > Close & Load To. Choose Table, Existing worksheet, and Details!\$B\$9.
- 5. Leave Add this data to the Data Model unticked. Click OK and wait for the table to load.
- 6. Click inside the new table. On Table Design, set Table Name to tblDetails.
- 7. This table is for row searches. Its column filters are separate from the dashboard slicers.

Order	Columns
1-5	Order_ID, Order_Date, City_Name, Service_Type, Status
6-9	Customer_ID, Restaurant_Name, Grand_Total_Customer, Net_Revenue_Swiggy
10-13	Delivery_Time_Actual, Payment_Mode_Name, Payment_Status, Coupon_Label

Before you continue

Details contains 200,000 orders. It has its own filter arrows, with one row per order.

STEP 106

Make Order Details easy to search

Work in: Details sheet

1. Select B1:N6. Set a dark fill and white text. Merge H2:N4 and type Order Details in bold, size 22.
2. Merge B2:F4. Enter =HYPERLINK("#'Home'!A1","HOME"). Give it an orange fill and white bold text.
3. Merge B7:N8. Turn on Wrap Text. Type: Search using the column arrows below. These filters are separate from the dashboard filters. Amounts on this page are source values; cancelled orders also have amounts.
4. Select B:N and use Home > Format > AutoFit Column Width. Then set Restaurant_Name and the money columns wide enough for their labels.
5. Click inside the table > Table Design. Choose a light table style with banded rows. Keep Filter Button ticked.
6. Select C10:C200009. Press Ctrl + 1 > Number > Custom. Enter dd mmm yyyy. Format I10:J200009 as Number with 2 decimals and a thousands separator.
7. Select J10:J200009. Choose Home > Conditional Formatting > Highlight Cells Rules > Less Than. Enter 0 and choose Light Red Fill with Dark Red Text. Click OK.
8. Select C10. Choose View > Freeze Panes > Freeze Panes. This keeps the header and Order_ID visible while scrolling.
9. Open the Order_ID filter arrow > Number Filters > Equals. Enter 1 and click OK.
10. Check the first sample: Order 1 is Delivered, has customer total 167.96, and net revenue 74.50.
11. Use Data > Clear to remove table filters. You can also search by restaurant, city, or payment status using the other arrows.

Do not calculate delivered revenue by summing this unfiltered detail column. The dashboard measures handle order status correctly.

Before you continue

The Details page can find an exact order, and Home returns to the landing page.

STEP 107

Create the Home page

Work in: Home sheet

1. Copy Overview using Move or Copy > Create a copy. Rename the copy Home_Frame.
2. On Home_Frame, delete its four charts and its four filter controls by clicking each object border and pressing Delete. Do not delete worksheet rows or columns.
3. Select H6:AV48. Open the Home > Merge & Center dropdown > Unmerge Cells. Then choose Home > Clear > Clear All. Fill this range with RGB 243, 245, 248 again. Keep the sidebar and title area.
4. Change H2:AG4 to Swiggy Dashboard. Change the Overview navigation fill back to dark and make B7:E9 orange.
5. On the original empty Home sheet, right-click its tab > Delete. Confirm only after checking that it is the original empty Home sheet.
6. Rename Home_Frame to Home. Move it to the first tab position. The text-based navigation formulas still point to Home.
7. Select H6:AV8. Merge, enable Wrap Text, align left, and type: Explore orders, restaurants, delivery, customers, payments, and item sales. Select a page to begin.
8. Create the six large linked tiles using the ranges on the next page.

Before you continue

Home has a clean title, sidebar, and space for six linked page tiles. It contains no charts or filter controls.

STEP 108

Add the Home page tiles

Work in: Home sheet

1. For each tile range below, use Merge & Center and Middle Align.
2. Give the tile a white fill and a thin light-grey outline. Set Calibri 15, bold, dark text.
3. Paste the listed HYPERLINK formula into the formula bar.
4. Make the Business Overview tile orange with white text to show the recommended starting page.
5. Select H44:AV46. Merge, enable Wrap Text, and type: Data period: 1 Jan 2024 to 30 Jun 2026. Use Order Details to look up individual records.
6. Set Home's print area to A1:AW48 and check its print preview.
7. Click each tile and then the HOME sidebar link on its destination. Confirm every tile reaches the correct page.

Tile range	Formula
H11:AA19	=HYPERLINK("#'Overview'!A1","BUSINESS OVERVIEW")
AC11:AV19	=HYPERLINK("#'Restaurants'!A1","RESTAURANTS")
H22:AA30	=HYPERLINK("#'Delivery'!A1","DELIVERY")
AC22:AV30	=HYPERLINK("#'Customers'!A1","CUSTOMERS")
H33:AA41	=HYPERLINK("#'Payments'!A1","PAYMENTS AND REVENUE")
AC33:AV41	=HYPERLINK("#'Products'!A1","MENU AND ITEM SALES")

Before you continue

All six large tiles open the correct analysis page, and the sidebar opens Order Details.

STEP 109

Open the button-code editor

Work in: Swiggy_Dashboard.xlsm

1. Press Alt + F11. The Visual Basic for Applications editor opens.
2. If the Project Explorer is hidden, press Ctrl + R.
3. Find VBAProject (Swiggy_Dashboard.xlsm). Click it once to select the correct workbook.
4. Click Insert > Module. A blank white code window opens.
5. Paste the complete ResetFilters code from the next page into this module.
6. Paste RefreshDashboard and ExportCurrentPage underneath it. Keep all three procedures in the same module.
7. Keep Option Explicit once, at the very top. Do not place one procedure inside another.
8. The VBA code is provided in full. You do not need to write any additional code.

Before you continue

The module belongs to Swiggy_Dashboard.xlsm. The three procedures will appear in the Assign Macro list after you save.

STEP 110

Add the Reset Filters code

Work in: VBA editor > the same module

Option Explicit

```
Public Sub ResetFilters()  
    On Error GoTo Failed  
    Dim sc As SlicerCache  
    Dim lo As ListObject  
    Application.ScreenUpdating = False  
    For Each sc In ThisWorkbook.SlicerCaches  
        sc.ClearManualFilter  
    Next sc  
    Set lo = ThisWorkbook.Worksheets("Details") _  
        .ListObjects("tblDetails")  
    If lo.AutoFilter.FilterMode Then lo.AutoFilter.ShowAllData  
    Application.ScreenUpdating = True  
    Exit Sub  
Failed:  
    Application.ScreenUpdating = True  
    MsgBox "Reset failed: " & Err.Description, vbExclamation  
End Sub
```

Copy only the code block. Preserve the underscores at the ends of continued VBA lines and use straight quotation marks.

Microsoft: [Microsoft VBA reference](#)

Before you continue

ResetFilters clears all slicers and the timeline, plus any filters on the Details table.

STEP 111

Add the Refresh Data code

Work in: VBA editor > the same module

```
Public Sub RefreshDashboard()
    On Error GoTo Failed
    Dim ws As Worksheet
    Dim pt As PivotTable
    Application.ScreenUpdating = False
    Application.StatusBar = "Refreshing dashboard data..."
    ThisWorkbook.Model.Refresh
    Application.CalculateUntilAsyncQueriesDone
    If Not ThisWorkbook.Worksheets("Details").ListObjects("tblDetails") _
        .QueryTable.Refresh(BackgroundQuery:=False) Then
        Err.Raise vbObjectError + 1, , "Details refresh cancelled."
    End If
    If Not ThisWorkbook.Worksheets("Checks").ListObjects("tblDataChecks") _
        .QueryTable.Refresh(BackgroundQuery:=False) Then
        Err.Raise vbObjectError + 2, , "Check-table refresh cancelled."
    End If
    For Each ws In ThisWorkbook.Worksheets
        For Each pt In ws.PivotTables
            If Not pt.RefreshTable Then
                Err.Raise vbObjectError + 3, , "Pivot refresh failed."
            End If
        Next pt
    Next ws
    Application.CalculateFull
    Application.StatusBar = False
    Application.ScreenUpdating = True
    MsgBox "Data refresh completed.", vbInformation
    Exit Sub
Failed:
    Application.StatusBar = False
    Application.ScreenUpdating = True
    MsgBox "Refresh failed: " & Err.Description, vbExclamation
End Sub
```

Copy only the code block. Preserve the underscores at the ends of continued VBA lines and use straight quotation marks.

Microsoft: [Microsoft VBA reference](#)

Before you continue

RefreshDashboard refreshes the model, the Details table, and the PivotTables.

STEP 112

Add the Export Page code

Work in: VBA editor > the same module

```
Public Sub ExportCurrentPage()
    On Error GoTo Failed
    Dim ws As Worksheet
    Dim target As Variant
    Set ws = ActiveSheet
    Select Case ws.Name
        Case "Home", "Overview", "Restaurants", "Delivery", _
            "Customers", "Payments", "Products"
        Case Else
            MsgBox "Open a dashboard page first.", vbInformation
            Exit Sub
    End Select
    target = Application.GetSaveAsFilename( _
        InitialFileName:=ThisWorkbook.Path & "\Exports\" & _
        ws.Name & "_" & Format(Now, "yyyymmdd_hhnnss") & ".pdf", _
        FileFilter:="PDF files (*.pdf), *.pdf")
    If VarType(target) = vbBoolean Then Exit Sub
    ws.ExportAsFixedFormat Type:=xlTypePDF, _
        Filename:=CStr(target), Quality:=xlQualityStandard, _
        IncludeDocProperties:=True, IgnorePrintAreas:=False, _
        OpenAfterPublish:=True
    Exit Sub
Failed:
    MsgBox "PDF export failed: " & Err.Description, vbExclamation
End Sub
```

Copy only the code block. Preserve the underscores at the ends of continued VBA lines and use straight quotation marks.

[Microsoft: Microsoft VBA reference](#)

Before you continue

ExportCurrentPage asks where to save a PDF of the active dashboard page. Cancel closes the dialog without exporting.

STEP 113

Compile and save the button code

Work in: VBA editor, then Excel

1. In the VBA editor, click Debug > Compile VBAProject. If no error appears, compilation passed.
2. If Excel highlights a line, compare it with the PDF. Common causes are a missing End Sub, a smart quote, or a missing line-continuation underscore.
3. Press Ctrl + S. Press Alt + Q to return to Excel.
4. Confirm that the file is still Swiggy_Dashboard.xlsm. Do not save it as .xlsx; that would remove the button code.
5. Close and reopen this workbook once. If Excel shows a security banner, enable content only for the workbook you created and whose code you pasted.
6. Do not choose Enable all macros globally. Keep normal Excel security settings.
7. Press Alt + F8. Check that ResetFilters, RefreshDashboard, and ExportCurrentPage are listed. Close the dialog.

Before you continue

The code compiles and the three macros are available. Hyperlink navigation and slicers work even when macro action buttons are unavailable.

STEP 114

Draw and connect the three action buttons

Work in: Overview sheet

1. Click Insert > Shapes > Rounded Rectangle. Draw a small button within AI2:AM4.
2. Right-click the shape > Edit Text. Type Reset filters.
3. On Shape Format, choose orange fill, no outline, and white text. Use Calibri 10, bold, centered.
4. Right-click the button > Assign Macro. Choose ResetFilters and click OK.
5. Create a second rounded rectangle within AO2:AR4. Type Refresh. Assign RefreshDashboard.
6. Create a third rounded rectangle within AT2:AV4. Type PDF. Assign ExportCurrentPage.
7. Use Alt while dragging each shape so its edges snap to its cell range.
8. To select a button without running it, right-click its border and press Esc to close the menu.
9. The title ends at AG4, leaving AH as a gap before the buttons.

[Microsoft: Assign macros to buttons](#)

Before you continue

Each button has its own assigned macro. No decorative shape is labelled as a button unless it performs that action.

STEP 115

Put the action buttons on every dashboard

Work in: Overview, then the other pages

1. On Overview, select Reset filters by right-clicking its border and pressing Esc. Hold Ctrl and select Refresh and PDF.
2. Press Ctrl + C. Click Restaurants, select AI2 using the Name Box, and press Ctrl + V.
3. Use Alt-drag to place the copies in AI2:AM4, AO2:AR4, and AT2:AV4. Their assigned macros are copied with them.
4. Repeat for Delivery, Customers, Payments, Products, and Home.
5. Keep these export buttons off Details, Pivots, KPI, and Checks.
6. On each destination sheet, right-click each copied button > Assign Macro to verify its assignment once.
7. Test Reset filters from Customers. All analysis pages should return to the full data selection.

Before you continue

Home and all six analysis pages have working Reset filters, Refresh, and PDF buttons.

STEP 116

Test one exact filter combination

Work in: Overview sheet

1. Click Reset filters.
2. In City select Mumbai. In Service select Main App. In Year select 2026.
3. In the timeline, choose Months and select only January 2026. Use its scroll bar to reach January if necessary.
4. Compare the cards and numeric KPI cells with the table below.
5. Open Restaurants, Delivery, Customers, Payments, and Products. Their filter selections must match, and their charts must update.
6. If only the cards change, reconnect the missing chart pivots using Report Connections.
7. If Products does not change, check the Items[Order_ID] -> Orders[Order_ID] relationship.

Metric	Expected for this selection
Total Orders	549
Delivered Orders	518
Cancelled Orders	31
Delivered Value	998,796.32
Net Revenue	193,312.57
Delivered Units	1,589
Reviewed Orders	97

Before you continue

The selection gives 549 orders, delivered value 998,796.32, and net revenue 193,312.57. Products gives 1,589 delivered units.

STEP 117

Test an empty selection and reset

Work in: Overview and Products sheets

1. Click Reset filters. Select Year 2026.
2. On the timeline, select July 2026. Calendar includes July, but the supplied orders stop in June.
3. Total orders should show 0. Average order value should show No orders. The on-time card should show No deliveries.
4. Charts should have no data for this selection. A blank plot is correct; old bars or old values should not remain.
5. Open Customers. Its rating card should show No reviews.
6. Open Products. Units per order should show No orders.
7. Click Reset filters. Verify that the full totals return, including 200,000 orders and 524,899 delivered units.

Before you continue

Empty filters do not produce #DIV/0!, #REF!, or misleading old totals. Reset restores the original dashboard.

STEP 118

Test refresh and export

Work in: Home and one analysis page

1. Click Refresh. Wait for the completion message. Keep Excel open while it is working.
2. Because the source files are unchanged, the full-period totals should remain unchanged.
3. Open Details and filter Order_ID to 1. Verify its sample values, then clear its filter.
4. Open Overview and select Mumbai. Click PDF.
5. In the Save dialog, select your Exports folder and click Save.
6. Open the exported PDF. Confirm the page title, selected filter, cards, and charts fit on one page.
7. Return to Excel. Clear the filters and export Home once.
8. A PDF export is a snapshot. Use Swiggy_Dashboard.xlsm when someone needs to click filters and navigation.

Before you continue

Refresh reads the source files; export creates a readable one-page snapshot of the selected dashboard.

STEP 119

Finish the workbook for presentation

Work in: All dashboard sheets

1. Click Reset filters. Save a clean starting view.
2. Open each analysis page at the same zoom. Check that chart edges align and no title or number is cut off.
3. Check that every page has one orange active navigation label and all other navigation labels are dark.
4. Right-click Pivots > Hide. Repeat for KPI and Checks. Keep the eight user pages visible.
5. Leave the underlying queries and model intact. Hiding a sheet does not delete its formulas or pivots.
6. Do not protect the sheets in this first version; protection can block slicers or object interaction unless configured carefully.
7. Click Home. Press Ctrl + S so the workbook opens on the landing page.
8. To show a hidden support sheet later, right-click any visible sheet tab > Unhide > select the sheet > OK.

Before you continue

The visible tabs are Home, Overview, Restaurants, Delivery, Customers, Payments, Products, and Details.

STEP 120

Update the project with new source data

Work in: Project folder, then Excel

1. Keep a backup copy of the current workbook and source folder before replacing data.
2. Replace the CSVs inside Data using the same filenames and column headings. Keep one current file for each source; do not add duplicate copies as new imports.
3. Open Swiggy_Dashboard.xlsm and click Refresh. Calendar will extend to cover the years in the new order dates.
4. If the project folder has moved, use Data > Get Data > Data Source Settings. Select each CSV source > Change Source > browse to its new location.
5. Repeat Change Source for every moved CSV, then refresh again. Do not rewrite the joins or measures.
6. Unhide Checks and compare totals with the new source. The original numeric benchmarks are for the original files only.
7. Keep the primary keys unique and the column names unchanged. If a source table starts containing more than one payment, review, or financial row per order, aggregate that table to one order row before using this model.
8. After a successful update, test one filter combination, check the Details table, and save on Home.

Before you continue

The project can be refreshed without rebuilding its layout. If a source structure changes, review the affected query instead of guessing.

STEP 121

Use the dashboard in your project demo

Work in: Home page

1. Start on Home and open Business Overview.
2. Show the full-period orders, delivered customer value, and platform net revenue. Explain that customer value and platform revenue are different.
3. Select Mumbai, Main App, and January 2026. Show the cards and charts changing together.
4. Open Delivery. Compare on-time rate and average duration across the selected categories.
5. Open Products. Show that the same filters also change item quantities and sales without repeating order revenue.
6. Open Customers. Explain that ratings use only reviewed delivered orders, and missing ratings are not zero.
7. Open Order Details and search an order ID. Then return Home.
8. Finish by clicking Reset filters and exporting one dashboard page as a PDF.

Describe this as a dashboard built from the supplied Swiggy project dataset. The files do not establish that it is audited company operating data.

Before you continue

The demo shows data preparation, correct calculations, connected filters, navigation, record lookup, refresh, and export.

STEP 122

Fix common problems

Work in: Use the row matching your problem

Problem	What to do
Power Query shows Error	Check the column type. Dates are yyyy-MM-dd; numeric decimals use a dot. Use Data Type > Using Locale for the affected column.
Merge finds no matches	Check both key columns have matching types. Use the exact ID pair in the guide. Service_Type joins to Service_Name by text.
Order count exceeds 200,000	A merge has duplicated orders. Check the expanded table's order key. Raw qltems must stay separate from Orders.
Ratings are too low	Do not replace missing ratings with zero. Use the delivered-only Food Rating measure and preserve nulls.
KPI has #REF! or always shows 0	Check measure spelling and that ptKPI still includes the measure. Generate a GETPIVOTDATA formula by clicking the pivot value.
Only some charts change	Use Report Connections on every slicer and timeline. Tick ptKPI and pt01-pt24.

Before you continue

After a fix, rerun the relevant filter or total check before continuing.

STEP 123

Fix common problems

Work in: Use the row matching your problem

Problem	What to do
Products ignores date or city	Check both model relationships and that Products uses measures reading Items, with the Delivered status filter.
Month order is wrong	Use Calendar[YearMonth] and Sort A to Z. Do not use month names alone or sort the monthly pivot by its numeric value.
A button does nothing	Check the workbook is .xlsm, macros are available, and the shape has the correct Assign Macro setting.
VBA compile error	Paste complete procedures into a standard Module. Keep straight quotes, End Sub, and the trailing underscore on continued lines.
Refresh cannot find a CSV	Use Data > Get Data > Data Source Settings > Change Source and point to the moved file.
PDF is cut off or has blank pages	Reset Print Area to A1:AW48, Landscape, and Width/Height to 1 page. Check File > Print before exporting.

Before you continue

After a fix, rerun the relevant filter or total check before continuing.

STEP 124

Keep these data notes with the project

Work in: Checks sheet or your written project report

1. Customer Age_Group was rebuilt from Age. The 496 missing labels belonged to age-18 customers.
2. Customer Join_Date is not used for acquisition or tenure because some orders precede it.
3. Food and delivery ratings are identical in the supplied source. Do not claim a discovered relationship between those two ratings.
4. Cancelled-order reviews stay in the source, but the rating measures exclude them.
5. Revenue follows Net_Revenue_Swiggy for delivered orders. It includes the supplied commission and customer fees less the customer discount; it is not a profit measure.
6. Item sales use Net_Amount_Item. Order-level coupon discounts and customer fees are represented at order level, not allocated across menu items.
7. Negative revenue remains visible. The original delivered-order count with negative revenue is 3,110.
8. This guide's calculations were checked against the CSVs. Excel 2021 itself was not available for a native execution test; complete the workbook test pages before presenting.

Before you continue

Your project explains the meaning and limits of the numbers without changing or inventing source facts.

STEP 125

Microsoft references

Work in: Optional help links

Topic	Official link
Power Pivot	https://support.microsoft.com/en-us/excel/start-the-power-pivot-add-in-for-excel
Merge queries	https://learn.microsoft.com/en-us/power-query/merge-queries-overview
Relationships	https://support.microsoft.com/en-us/excel/relationships-between-tables-in-a-data-model
CALCULATE and filters	https://learn.microsoft.com/en-us/dax/calculate-function-dax
GETPIVOTDATA	https://support.microsoft.com/en-us/excel/functions/getpivotdata-function
Slicers	https://support.microsoft.com/en-us/excel/get-started/use-slicers-to-filter-data
Macro buttons	https://support.microsoft.com/en-us/excel/assign-a-macro-to-a-form-or-a-control-button
Model refresh	https://learn.microsoft.com/en-us/office/vba/api/excel.model.refresh
PDF export	https://learn.microsoft.com/en-us/office/vba/api/excel.worksheet.exportasfilteredformat

Before you continue

The guide uses features available in Excel 2021 for Windows, with Power Pivot enabled.