


ingestion/gateway/include
/telemetryhub/gateway/RedisPublisher.h

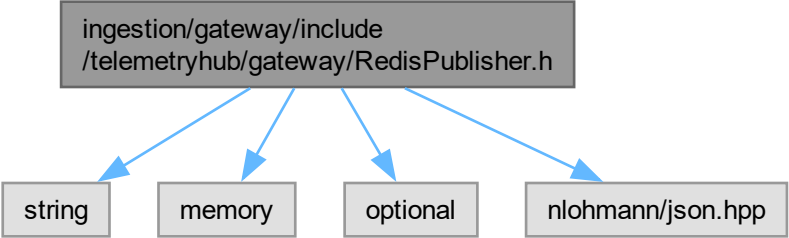

```
graph TD; A["ingestion/gateway/include  
/telemetryhub/gateway/RedisPublisher.h"] --> B["string"]; A --> C["memory"]; A --> D["optional"]; A --> E["nlohmann/json.hpp"];
```

The diagram illustrates the dependencies of the header file `ingestion/gateway/include/telemetryhub/gateway/RedisPublisher.h`. It is represented as a central gray box at the top. Four blue arrows point downwards from this box to four separate gray boxes below it, each representing a dependency: `string`, `memory`, `optional`, and `nlohmann/json.hpp`.

string

memory

optional

nlohmann/json.hpp