Chungyuk Takahashi, Amauris Ferreira, Jonathan Maeda, Joseph Kantorovich
COSI 105b
Twitter DB Schema
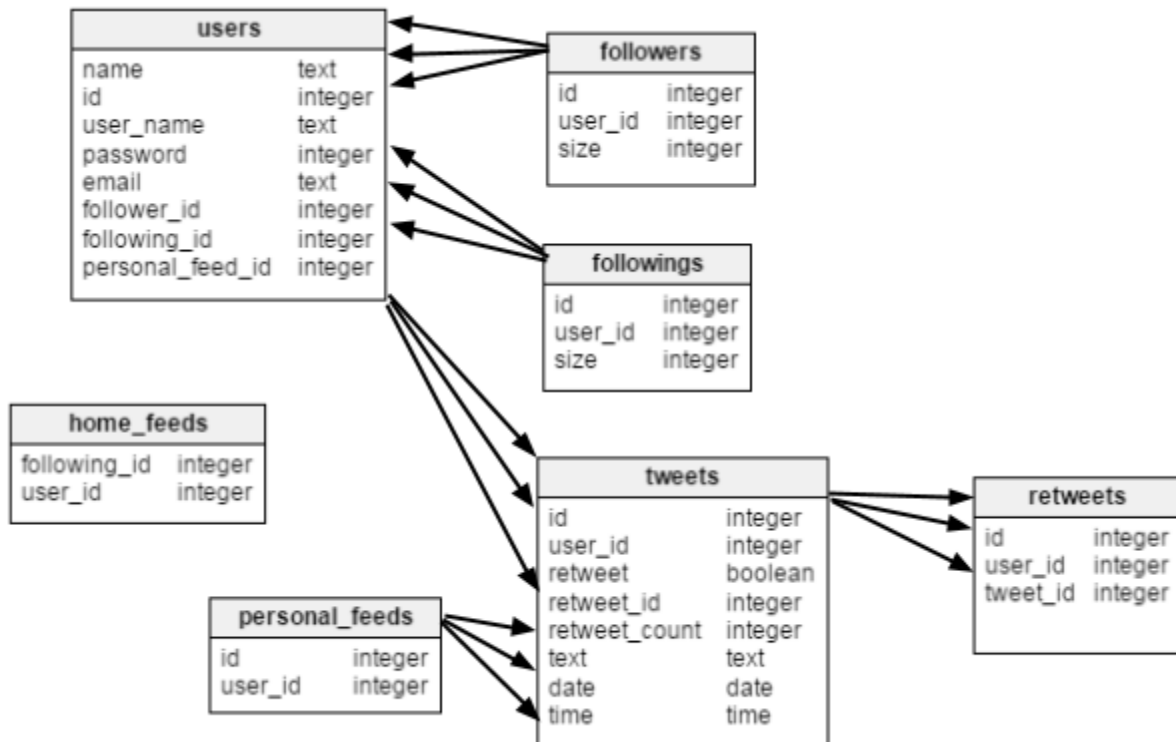
users

name	text
id	integer
user_name	text
password	integer
email	text
follower_id	integer
following_id	integer
personal_feed_id	integer

followers

id	integer
user_id	integer
size	integer

followings

id	integer
user_id	integer
size	integer

home_feeds

| following_id | integer |
| user_id | integer |

tweets

id	integer
user_id	integer
retweet	boolean
retweet_id	integer
retweet_count	integer
text	text
date	date
time	time

retweets

id	integer
user_id	integer
tweet_id	integer

personal_feeds

| id | integer |
| user_id | integer |

table users
    has_many tweets
    belongs_to follower
    belongs_to following
        name:text
        id: integer
        user_name: text
        password: text
        email: text
        follower_id: integer
        following_id: integer

table tweets
    belongs_to user
    belongs_to personal_feed
    has_many retweets
        id :integer
        user_id :integer
        retweet :boolean
        retweet_id :integer
        retweet_count: integer
        text :text
        date :date

```
        time :time

table retweets
    belongs_to tweet
        id :integer
        user_id :integer
        tweet_id :integer

table followers
    has_many users
        id: integer
        user_id: integer
        size: integer

table followings
    has_many users
        id: integer
        user_id: integer
        size: integer

table personal_feeds
    has_many tweets
        user_id :integer

table home_feeds
        following_id :integer
        user_id :integer
```