

Setup and Installation Guide



March, 2021

© Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved. SPDX-License-Identifier: CC-BY-SA-4.0

Notices

This document is provided for informational purposes only. It represents AWS's current product offerings and practices as of the date of issue of this document, which are subject to change without notice. Customers are responsible for making their own independent assessment of the information in this document and any use of AWS's products or services, each of which is provided "as is" without warranty of any kind, whether express or implied. This document does not create any warranties, representations, contractual commitments, conditions or assurances from AWS, its affiliates, suppliers or licensors. The responsibilities and liabilities of AWS to its customers are controlled by AWS agreements, and this document is not part of, nor does it modify, any agreement between AWS and its customers.

Abstract

This guide details the integration between Amazon Connect and Salesforce Lightning. It covers the installation, configuration, and operation of the two primary components of the integration: the Amazon Connect CTI Adapter for Salesforce and the AWS Serverless Application Repository for Amazon Connect Salesforce integration.

License Summary

The documentation is made available under the Creative Commons Attribution-ShareAlike 4.0 International License. See the [LICENSE file](#).

The sample code within this documentation is made available under the MIT-0 license. See the [LICENSE-SAMPLECODE file](#).

Table of contents:

- [Release Notes](#)

- 5.14 June 2021
- 5.13 April 2021
- 5.12 March 2021
- 5.11 March 2021
- 5.10 February 2021
- 5.9 December 2020
- 5.7 November 2020
- 5.5 October 2020
- 5.4 Late September 2020
 - 5.3 September 2020
 - 5.2 September 2020
 - 5.1 Late August 2020
 - 5.0 August 2020
 - 4.5 April 2020
 - 4.4 March 2020
 - 4.2 December 2019
 - 4.1 November 2019
 - 3.11 August 2019
 - 3.10 July 2019
 - 3.9 May 2019
 - 3.87 May 2019
 - 3.7 May 2019
 - 3.6 April 2019
 - 3.1 March 2019
 - 3.0 February 2019
- Further Reading
- Key Benefits and Requirements
 - Key Benefits
 - Requirements
 - Prerequisites
 - Browser Compatibility
 - Salesforce Lightning Support
- Installing the Amazon Connect CTI Adapter for Salesforce Package
 - Lightning Flow Setup Installation
 - Installing from the Salesforce AppExchange

- Create the Softphone Layout
- Set Access Permissions
 - AC_Administrator
 - AC_Manager
 - AC_Agent
- Configure Console Experience
- Configure Classic Experience
- Installing the Amazon Connect Salesforce Lambda Package
 - Salesforce Lambda Prerequisites
 - Determine your production Environment
 - Determine your Consumer Key and Secret
 - Determine your Username, Password and Security Token
 - Store Salesforce credentials in AWS Secrets Manager
 - Install the Amazon Connect Salesforce Lambda package
- Upgrading from an Earlier Version
- CTI Adapter Installation Troubleshooting and Common Issues
 - I upgraded my adapter to v5.10, but I cannot see the CCP Config changes
 - Error "refused to run the JavaScript URL because it violates the following Content Security Policy directive..."
 - Error "refused to frame" Visualforce page
 - I upgraded my adapter to v5, but I don't see the CTI Flows feature.
 - I upgraded my adapter from v3 to v5 and we lost some screenpop functionality.
 - Certain picklists are missing picklist items.
- CTI Adapter Configuration
 - CTI Adapter Details
 - Single Sign On Settings
 - Identify the SSO URL components
 - Configure the CTI Lightning Adapter in Salesforce
- Omnipresence Agent State Sync
 - Enable Omnichannel
 - Create Presence Statuses
 - Configure Enabled Service Presences Status Access
 - Amazon Connect System Statuses
 - Configure Presence Status Synchronization Rules
 - Presence Status Configuration Rules
- Contact Attributes Display

- Call Recording Link for Task
 - Cloudformation Template
 - AWS Side Setup
 - Salesforce Side Setup
 - Enabling call recording streaming
 - Common Audio Streaming Setup Issues
- Call Display on the Account Page
- Outbound Campaign Calls
 - Create a Queue
 - Create a Service Channel
 - Create a Routing Configuration
 - Outbound Campaign Custom Object Using Salesforce Data Loader
- Amazon Connect Reports in Salesforce
- CTI Flows
- Localization
 - Prerequisites
 - Setting you preferred language
 - Additional Notes
- CTI Actions
 - CCP Overlay
 - Receiving Data from CTI Flows
 - Upgrading from an earlier version
- Recording Controls
 - Setup
- Invoking the Amazon Connect Salesforce Lambda in a Contact Flow
 - Salesforce Lookup
 - Salesforce Create
 - Salesforce Update
 - Salesforce Phone Lookup
 - Salesforce query
 - Salesforce queryOne
 - Salesforce createChatterPost
 - Salesforce createChatterComment
 - Salesforce search
 - Salesforce searchOne

- Appendix A: CTI Flow Sources and Events
- Appendix B: Configuring Salesforce as Your Identity Provider
 - Configuration
 - Prerequisites
 - Configuring Salesforce as an Identity Provider
 - Setup Identity Provider & Download Metadata
 - Configure the Identity Provider, Policy, and Role in the AWS Console
 - Configure the Identity Provider
 - Create the IAM Role and Policy
 - Complete the Base Salesforce Configuration
 - Create the Connected App in Salesforce
 - Complete the Amazon Connect Configuration
 - Add Users to Amazon Connect
 - Final Configuration for the Lightning Experience
 - Create the Amazon Connect SSO URL
 - Configure the CTI Lightning Adapter in Salesforce For SSO
- Appendix C: CTI Flow Examples
 - Voice Contact Screenpop (Legacy Adapter Support)
 - Chat Contact Screenpop
 - Click-to-Dial
 - Screen Pop on Customer Phone Number
 - Screen Pop a Case on Contact Attribute Data (if it exists) or Pop a New Case (if it does not)
 - Create a Task (Call Activity) and Pop That Task
 - Screenpop on Customer Email Address (in contact attribute data)
 - Create a Task (Call Activity) and Pop That Task
 - Default CTI Flows
- Appendix D: CTI Flow Blocks
 - If-else
 - HTTP Request
 - Get Property
 - Get All Properties
 - Format Phone Number
 - Format Phone Number (E164)
 - Format a Date object
 - Is Truthy?

- Set Property
- Log to Console
- Show Modal
- Enable Click To Dial?
- Enable Click To Dial
- Disable Click To Dial
- Get App View Info
- Get Softphone Layout
- Get Agent Workload on Salesforce
- Complete High Velocity Sales Work With Task Saved
- Refresh View
- Show Softphone Panel
- Hide Softphone Panel
- Set Softphone Panel Height
- Set Softphone Panel Width
- Screenpop Object
- Screenpop Url
- Screenpop Object Home
- Screenpop List
- Screenpop Search
- Screenpop New Record
- Search And Screenpop
- Run Apex
- Get Agent State from Salesforce
- Set Agent State on Salesforce
- Login Agent on Salesforce
- Logout Agent on Salesforce
- Save (or Create) a Record
- Create a Task
- Is Contact "Do Not Call"?
- Dial Number
- Mute Agent
- Unmute Agent
- Get Agent Status from Connect
- Set Agent Status on Connect

- Set Agent Status By Name on Connect
- Set Agent as Available on Connect
- Get Quick Connection List
- Get Transfer Connection List
- Get Endpoint by Phone Number
- Get Available Agent States
- Get Agent Name
- Get Agent Extension
- Get Agent Deskphone Number
- Is Agent Softphone Enabled?
- Change Agent to Softphone
- Change Agent to Deskphone
- Get Agent Configuration
- Get Agent Dialable Countries
- Create Task Contact
- Get Contact Attribute
- Is Voice Contact?
- Is Chat Contact?
- Is Task Contact?
- Is Contact Inbound?
- Is Contact Transfer?
- Is Callback?
- Get Contact Properties
- Get Customer Phone Number
- Get Contact Interaction Metadata
- Pop Task Contact's Reference Urls
- Query value
- Get Salesforce Lead Id
- Open Salesforce Primary Tab
- Open Salesforce Sub Tab
- Get Focused Primary Tab Object Id
- Get Focused Subtab Object Id
- Call jQuery Method
- Replace String
- Text Starts With Value

- Text Ends With Value
- Join Strings
- SOQL Query
- Multiply
- Divide
- Get Tab Object Map
- Close Salesforce Tab
- Delay
- Get Primary Tab Ids
- Get Tabs With Matching Url
- Length
- Slice
- Cast a Value to a Type
- Get CCP Logs
- Clear All Properties
- Unset Property
- Show Attributes
- Is Task Contact?
- Create Task Contact
- Pop Task Contact's ReferenceUrls
- Start Recording
- Stop Recording
- Update Contact Attributes
- Get Payload
- Send Data to CCP Overlay
- Leave a Voicemail

Release Notes

Important: when upgrading the CTI Adapter, please make sure that the Salesforce Lambdas are also updated to the newest version.

5.14 June 2021

- **Bugfix:** The issue that caused an Attribute label to not display properly in the attributes panel has been fixed.
- **Bugfix:** The issue that caused AC Queue Metrics tab's name showing blank has been fixed.
- **Bugfix:** The issue that caused the Recording Panel button to fail when a url is used for connect instance alias has been fixed.
- **Enhancement:** We now make it possible for voicemail drops to work with queue callbacks.
- **Enhancement:** You can now configure the CT Action Recording Panel's initial state using contact attributes. If you're recording your call, make sure to add an attribute named `RECORDING_STARTED` whose value is `true` in your Contact Flow.
- **Enhancement:** We have added `IfCurrentAgentState` tag to `SetAgentStatusOnSessionEnd` feature, which allows customers to condition this feature on the Agent's current state.

5.13 April 2021

- **Feature: CTI Actions - programmable buttons within the CCP overlay**

In this release, we have added a feature called CTI Action which are programmable buttons for your CTI Flows. Each CTI Action is a button that can be programmed to trigger a CTI Flows whose source value is "CTI Action." In addition, CTI Actions can be programmed to ask the agent for additional information via a data entry form. You can use the agent's entry in your CTI Flow with the help of "Get Payload" block. This is a great way to ask your agents to enter ad-hoc data prior to running the CTI Flow to provide additional information as part of a workflow to automate case creation, or start a customer refund process. **If you are upgrading from a previous version of the CTI Adapter, please be sure to review the additional setup steps required for CTI Actions.**

- **Feature: CTI Actions: recording API integration within the CCP overlay**

The CTI Adapter now includes integration with Connect's recording API. This feature allows the agent to control when to start and stop recording a call. Once the recording has started, they can also pause and resume it. For example, agents can pause a recording before asking for sensitive information from your customers. Once the agent stops a recording, you cannot start it again. Use pause/resume buttons after you've started recording a call to control the recording.

- **Enhancement: Voicemail Drops (beta)**

The **beta Voicemail Drops** feature now integrates with CTI Actions. In the beta, voicemail drops were loaded directly into the CCP Overlay. As of 5.13, you will need to create a CTI Action, and use the newly added "Leave a Voicemail" block in the CTI Flow where you can configure the specific voicemail drop and the quick connect name to use for the voicemail.

- **Feature: CCP Overlay: Data panel to receive data from CTI Flows.**

You can now send data from a CTI Flow to the CCP Overlay. The Data panel on CCP Overlay will display any object you pass it from "Send Data to CCP Overlay" block.

- **Feature: CTI Flow Blocks: "Start Recording" and "Stop Recording"**

With "Start Recording" and "Stop Recording" blocks, you can control the voice recording of the call within your CTI Flows.

- **Feature: CTI Flow Block: "Update Contact Attributes"**

You can now update contract attributes using CTI Flows. This block accepts a list of key-value pairs and assigns them to the currently active contact. It may come handy for passing Case id and other important information to the next agent when transferring a call.

- **Feature: CTI Flow Block: "Get Payload"**

The `payload` object contains the arguments passed to the CTI Flow. Now you will be able to use "Get Payload" block to reference a payload key as an input in other blocks on your CTI Flow.

- **Feature: CTI Flow Block: "Send Data to CCP Overlay"**

This block allows you to send data to your agent from a CTI flow. The agent will see this information in the CCP Overlay in a panel entitled "Data."

- **Feature: CTI Flow Block: "Leave a Voicemail"**

This block works with the beta Voicemail Drops feature. When you configure the voicemailDropName and quickConnectName, it will pass the contact to an IVR to leave a voicemail on the agent's behalf.

- **Feature: CTI Flow Block: "Get Salesforce Lead ID":** This block allows you to get a Salesforce lead by using a phone number.
- **Enhancement:** "Get Salesforce Contact Id" block now uses FIND syntax to search across multiple fields.
- **BugFix:** For the `SetAgentStatusOnSessionEnd` feature, it would occasionally fail if the agent hadn't interacted with the webpage. We solve this by creating a popout to monitor the agent session.
- **Enhancement:** For the `SetAgentStatusOnSessionEnd` attribute, you can now specify multiple values.

- **Enhancement:** When `SetAgentStatusOnSessionEnd` feature is enabled, you can now configure which state the agent should be shown as when they login with the `InitialAgentState` setting.
- **Enhancement:** When `SetAgentStatusOnSessionEnd` feature is enabled, you can now configure which agent to logout when all tabs are closed by setting the Status to Logout.
- **Bugfix:** Addressed issue that caused CTI Flows to be run on every open Salesforce tab.
- **Bugfix:** Addressed an issue in "Get Salesforce Contact Id" block that caused the query to fail if the phone number was in E164 format.
- **Enhancement:** Added the `onDestroy` Event to certain CTI Flow Sources

5.12 March 2021

- **Feature:** Added custom setting which will allow customers to enable and disable non-essential triggers (They are disabled by default now). [More details in the troubleshooting section](#)
- **Bugfix:** Addressed additional trigger issue that prevented orgs with 200k+ CCA records from updating Case and Contact records.
- **Bugfix:** Addressed issue where AC Permission sets did not include the `CustomerEndpointAddress` field for the `ContactChannelAnalytics` object.
- **Bugfix:** Addressed issue where AC Permission sets did not include the `MedialessPopout` page.

5.11 March 2021

- **Bugfix:** Addressed trigger issue that prevented community and partner users from updating Contact and Case records.

5.10 February 2021

- **Feature:** *Contact Control Panel (CCP) Audio Device settings option.* Admins can toggle Phone type settings and the new [Audio Devices settings](#) for agents to see on their CCP. [Audio Device settings](#) allow the agents to choose audio devices for their speaker, microphone, and ringer.
- **Feature:** *Custom Ringtone for chat.* Admins can configure a custom ringtone for chat (separate from CCP) from the CTI Adapter configuration page.
- **Enhancement:** The Salesforce built-in Cross Site Request Forgery (CSRF) protection is enabled for Visualforce pages in the CTI Adapter package which improves organizational security to protect

against cross site request forgeries.

- **Bugfix:** Decision blocks no longer requires both sockets to be connected.
- **Bugfix:** Click to Dial stopped working after first use until the agent refreshed the page.
- **Bugfix:** Error that prevented Contact Lens app resources from being hosted on a different domain than the Salesforce instance.
- **Bugfix:** Error that prevented Contact Lens app from displaying intermittently when Transcribe was enabled.
- **Bugfix:** Changed the logic for the IsContactTransfer CTI Flow Block which always returned true.
- **Bugfix:** Medialess popout not closing after Salesforce tabs are closed.
- **Bugfix:** Login window did not close automatically after logging into Connect.
- **Bugfix:** Unable to upgrade the package if the Case or Contact object contained encrypted fields.

5.9 December 2020

- **Feature:** Contact Lens Integration
- **Feature:** Tasks Integration - Added the Amazon Connect Task Contact as a source to CTI Flow in addition to Task specific events
- **Feature:** CTI Block - Is Task Contact? - Check if the contact is a task
- **Feature:** CTI Block - Create Task Contact - Creating a new task contact with certain inputs.
- **Feature:** CTI Block - Pop Task Contact's ReferenceUrls - Pop any reference urls that are related to the task contact
- Upgraded Salesforce API to v50.0.
- **Feature update:** If you have CCP open on multiple tabs, CTI Flows will be executed only on one of them. The execution will be performed on the current tab, by default. If the agent is currently looking at a different site, a random tab will be selected to perform the execution.
- **Enhancement:** \$User.ProfileId is now available through "userProfile" property.
- **Enhancement:** CTI Flow execution timeout window has been increased to 60 seconds.
- **Feature update:** When the CCP popout is opened, we now ask for a confirmation before refreshing or closing the tab that opened it. Note that if you do close the original tab, the pop out might also be closed.
- **Bugfix:** Voicemail Drops feature has been fixed.
- **Bugfix:** CTI Flow "Open Subtab" block has been fixed.

5.7 November 2020

- **Feature:** Localization into 9 languages.

- **Feature:** Add callType to return fields of "Get Contact Properties" block
- **Feature:** Add formatted phone number to return fields of "Get Contact Properties" block
- **Feature:** Add script name to CTI flow definition file.
- **Feature:** Remove context from log outputs
- **Bugfix:** Return field of "Open Primary Tab" was value, not id, as specified. We now provide it in both `value` and `id` fields for backward compatibility.
- **Feature:** Make the error message shown when the execution runs too long more informative.
- **Feature:** Make sure the attributes overlay doesn't open automatically when CCP is opened.
Documentation: "Create and pop that task" default flow is fixed.
- **Bugfix:** update return value of "Get Agent Configuration" block to match the documentation.
- **Feature:** Increase CTI Flow timeout to 10 seconds.
- **Bugfix:** remove the leading wildcard matcher in "Get Salesforce Contact Id" block query. The wildcard matcher caused performance issues with the query. Going forward make sure the phone number is an exact match to the one in file.
- **Bugfix:** Ensure "Join Strings" block does not ignore boolean false values.
- **Bugfix:** Ensure "Log to Console" block does not ignore boolean false values.
- **Feature:** Add uid field on top of the block on the canvas.
- **Bugfix:** Remove the loginWindow object from log output because it errors with "Cannot convert object to primitive value."
- **Bugfix:** ContactChannel object updates to new agent if previous agent rejected or missed a contact
- **Bugfix:** Changing status to logout now correctly logs agent out
- **Feature:** Rename "Enable Click to Dial?" to "Can Make Outbound Calls?".
- **Feature:** CTI Flow Block - math function - "Multiply"
- **Feature:** CTI Flow Block - math function - "Divide"
- **Feature:** CTI Flow Block - "Get Tab Object Map"
- **Feature:** CTI Flow Block - "Close Salesforce Tab"
- **Feature:** CTI Flow Block - "Delay"
- **Feature:** CTI Flow Block - "Get Primary Tab Ids"
- **Feature:** Improve browser log formatting.
- **Feature:** CTI Flow Block - "Get Tabs With Matching Url"
- **Feature:** *Update Connect agent status when all Salesforce tabs are closed:* You can set the agent status to a specific state if the SetAgentStatusOnSessionEnd feature is turned on and the agent's routing profile name includes the value of IfProfileNameIncludes setting, such as "On-Call." By default, the agent status is set to "Offline" if the feature is enabled and nothing is specified for IfProfileNameIncludes. If this feature is enabled, the agent will be automatically shown as available when they login to Salesforce and the CCP.
- **Feature:** CTI Flow Block - Length"

- **Feature:** CTI Flow Block - "Slice"
- **Feature:** CTI Flow Block - "Cast a Value to a Type"
- **Bugfix:** Agent is able to accept calls when Medialess is turned on.
- **Feature:** CTI Flow Block - "Get CCP Logs" Remove "Initialization" and "Browser" sources

5.5 October 2020

- **Feature:** CTI Flow Block - "Clear All Properties"
- **Feature:** CTI Flow Block - "Unset Property"
- **Feature:** CTI Flow Block - "Show All Attributes"
- **Bugfix:** Attributes panel can now display attributes of transferred contacts.

5.4 Late September 2020

- **Feature:** You can now provide additional ad-hoc fields to "Create a Task" block. (Note: the values of these fields don't have a lookup dropdown yet.)
- **Feature:** New CTI Block! - You can now create "counters" with the "Update Counter" and read the value of your counters using "Get Counter" block.
- **Feature:** You can now get the number of open tabs from `openAgentTabs` counter.
- **Feature:** You can now compare multiple things using "Is One Of?" block in CTI Flows.
- **Feature:** New CTI Block! - You can now extract a value from a complex value, such as an array or an object, using the "Extract Value" block. (This comes handy when you retrieve a Salesforce object.)
- **Feature:** New CTI Block! - You can use the Salesforce retrieve API to fetch a record from the server by id using "Retrieve Salesforce Record" block.
- **Feature:** New CTI Block! - You can use the "Get Salesforce Contact Id" to fetch the id of a Salesforce contact by its phone number.
- **Feature:** New CTI Block! - You can now show a window alert using "Alert" block.
- **Feature:** New CTI Block! - You can now use create a complex string using string templates and multiple variables with the help of "String Template" block.
- **Bugfix:** When a screenpop is "deferred," the CTI Block used to return an inexact match and the Id field in the return value of the block would be blank. This issue has been fixed in this release.
- **Bugfix:** Presence sync is working again. The current release also reduces the wait threshold between each presence sync update from 1 second to 100ms, i.e. co-occurring events won't get lost anymore (as much).
- **Bugfix:** The encoding issue affecting "SOQL Block" has been fixed. The single quotes in the SOQL query are no longer encoded as HTML entities.

- **Bugfix:** To access the return value of another block, power users use "magic strings," e.g. `\$.actions.<blockId>.results.<fieldName>`, but these strings used to be cleared in the UI when the block is selected on the canvas. This issue is now fixed.
- **Bugfix:** The spelling of `TaskSubtype` field in "Create a Task" block has been fixed. Your `TaskSubtype` won't get lost anymore.
- **Bugfix:** Call recording view for a Case has been fixed.
- **Bugfix:** "Is Contact Inbound?" block is working again.
- **Bugfix:** "Is Truthy?" block now works with boolean input values.
- **Bugfix:** Salesforce UI onNavigationChange event listener is working again.
- **Bugfix:** We now alert you to change your instance alias if you try to sign in with instance alias set to "default."

5.3 September 2020

- **Bugfix:** Fix the issue that caused ACSFCCP_CallRecordingTask component to not work.

5.2 September 2020

- **Bugfix:** Fix the issue that prevented users from creating a new record using CTI Flows in Classic.
- **Bugfix:** Fix the issue that caused the contact channel analytics to not get updated at the end of a call.
- **Bugfix:** Fix the contact channel analytics recording view.
- **Feature:** Add a CTI block called "Get Chat Message."
- **Feature:** Add a CTI block called "SOQL Query." This block executes an arbitrary SOQL statement and returns the results.

5.1 Late August 2020

- **Bugfix:** Ensure "Get App View" CTI Flow block doesn't break the sidebar
- **Enhancement:** Add "queueARN" field to "Dial Number" CTI Flow block
- **Bugfix:** Ensure some required CTI Flow block fields are not shown as "optional"
- **Bugfix:** Ensure "Save (or Create) a Record" block works as expected
- **Bugfix:** Fix the validation error on "CallDurationInSeconds" field in "Create a Task" block
- **Bugfix:** Fix phantom scrollbar on Windows machines
- **Bugfix:** Fix issue where copying contact attributes to clipboard doesn't work
- **Bugfix:** Fix issue where "saveLog" CTI Flow block throws an error
- **Bugfix:** Fix issue with onOffline CTI Flow event not firing
- **Bugfix:** Fix various omnichannel presence sync bugs

- **Bugfix:** Ensure the CCP default dimensions are adjusted to CCPv2 defaults
- **Feature:** Add block "Set Agent Status By Name on Connect."

5.0 August 2020

- **This release has new features and updates:** Please test and validate version 5.0 in your Salesforce sandbox before upgrading this in production.
- **CTI Flows:** CTI Flows replace Lightning CTI Extensions in allowing customers to build their agent workflows for Lightning and Classic via a drag and drop UI. Many of the CTI blocks are similar to the Lightning CTI Extension script API calls and can be mapped similarly. Lightning CTI Extension scripts are NOT automatically migrated to CTI Flows. When upgrading the package with existing scripts, it will give you the option to download the existing script for reference before building your CTI Flows. We strongly recommend you validate this install/upgrade in a test environment and fully test the CTI Flows against your previous scripts functionality. Please open a support ticket if there is additional functionality you require from your current scripting implementation.
- **Security Profile improvements:** Added AC Administrator, AC Agent, and AC Manager permission sets to enforces objects access and fields level security (FLS) as per Salesforce security guideline for managed package. To access Amazon Connect Objects and fields, user should either one of Amazon Connect permission sets AC Administrator, AC Agent, and AC Manager.
- **Attributes:** Amazon Connect CCP (Contact Control Panel) in Lightning and Classic now display an overlay for showing attributes consistently.
- **AWS Secrets Manager** support for storing Salesforce credentials.
- **VPC Support:** ability to place Lambdas in VPC
- **New Salesforce API integration:** Exposed new operations in sfinvokeapi to read or create Salesforce records(query, queryOne, createChatterPost, createChatterComment, lookup_all, delete)
- **Upgrade:** Amazon Connect Streams API bumped up to version 1.5.
- **Bugfix:** Task creation issue for non-connect users - Fixed task trigger apex code, added a validation before evaluate security access check for Amazon Connect managed package objects
- **Bugfix:** Contact interaction duration fixed.
- **Other minor bugfixes and improvements**

4.5 April 2020

- **This release has new features and updates:** Please test and validate version 4.5 in your Salesforce sandbox before upgrading this in production.
- **Installation / Configuration:** AC_Administrator role has been added to manage CTI Configuration in addition to AC_Manager and AC_Agent. See documentation for further information.
- **API:** Updated support for CCPv2 in Classic/Console. See documentation for Call Center settings.
- **Bugfix:** Updated attribute display to resolve duplicated attributes.

- **Security:** Improved enforced Salesforce sharing model (record and field level) support.

4.4 March 2020

- **This release has significant new features and updates:** Please test and validate version 4.3 in your Salesforce sandbox before upgrading this in production.
- **Documentation:** Guide has been rewritten and restructured based on feedback.
- **Installation / Configuration:** Improved installation and configuration guide
- **Installation / Configuration:** Added Enhanced Agent Logout functionality to Lightning.
- **API:** Updated to the latest Amazon Connect Streams and Chat libraries
- **API:** Additional extensibility methods provided
- **Setup:** Improved Presence Sync Rule editor
- **Setup:** CTI Adapter validation is performed upon initialization and will inform the user of common misconfigurations.
- **Setup:** Additional CTI Script examples are provided.
- **Setup:** The ability to place the lightning transcript view on Task, Contact Channel, and Contact Channel Analytics object has been added.
- **Bugfix:** OmniChannel workload related data not being usable has been resolved.
- **Bugfix:** CTI Attribute issue when processing multiple pieces of contact attribute data has been resolved.
- **Bugfix:** The call transcript now scrolls within a fixed region rather than consuming vertical space.
- **Bugfix:** Finding Task Record in Classic/Console fixed.
- **Security:** The ability to create, update, and delete AC_CtiAdapter, AC_CtiScript, AC_CtiAttribute and AC_PresenceSyncRule records has been removed from the AC_Agent permission set.

4.2 December 2019

- **This release has significant new features and updates:** Please test and validate version 4.2 in your Salesforce sandbox before upgrading this in production.
- **Installation / Configuration:** Improved installation and configuration guide
- **API:** Lightning CCP Extension scripts and reference guide
- **Setup:** A default CTI adapter and scripts for click-to-dial, voice contact pop, and chat contact pop are not included in the base installation.
- **Editor:** A more robust script editor is included for use in CTI adapter / script configuration.
- **Bugfix:** SSO issue has been resolved

4.1 November 2019

- **This release has significant new features and updates:** Please test and validate version 4.0 in your Salesforce sandbox before upgrading this in production. As we look to simplify documentation, this release introduces a new [Amazon Connect CTI Adapter v4 for Salesforce Lightning](#) setup and installation guide. Please review this setup guide in detail to see all the latest changes for Lightning CTI Adapter installations.
- **Classic and Console CTI setup guide:** Please use the [Amazon Connect CTI Adapter v4 for Salesforce Classic](#) setup and installation guide for Classic and Console CTI Adapter installations.
- **Amazon Connect Chat and Contact Control Panel (CCP) v2:** support for Amazon Connect chat and integration of CCP v2. CCP v2 is required for Lightning CTI Adapter installations. CCP v1 is still supported for Classic / Console CTI Adapter installations.
- **Historical and Real-Time Reporting:** updated historical metric functionality with additional metrics and dashboards. Added real-time metrics and dashboards. This functionality requires an update of AWS Serverless Lambda functions for Salesforce.
- **Lightning CCP Extensions and configuration:** We have revamped the approach for the Call Center config and have added a new AC CTI Adapters Lighting config page.
- **High Velocity Sales:** CTI Adapter integration supported for Salesforce High Velocity Sales product.

3.11 August 2019

- Added support for Salesforce platform encryption
- Fixed issue with logout action not re-rendering the sign-in button
- Fixed documentation issue regarding presence sync sources
- Fixed documentation issue regarding recorded conversations security configuration
- Updated documentation for presence sync rule configuration

3.10 July 2019

- Added support for enabling / disabling softphone popout
- Added support for previousWorkloadPct and newWorkloadPct operands in presence sync rules
- Fixed issue with presence sync rules loading

3.9 May 2019

- Added support for Opportunities for Task association
- Fixed issue with presence sync rules loading
- Fixed issue with state setting when no presence rules defined
- Fixed issue with Task pop in specific config scenarios

3.87 May 2019

- NOTE: The "mini" Task page has been deprecated in this release of the adapter. Users requiring custom functionality may use the page and controller code included in this document as a starting point for a custom Task page of their design.
- Added rules-based configuration of agent presence state between Amazon Connect and Salesforce
- Added enhanced contact attribute display and configuration including clickable hyperlinks, key-value display options, and key-value formatting
- Added option to enable/disable automatic call duration updating on the Task object
- Added functionality to directly pop associated record on click-to-dial avoiding search and pop behavior
- Fixed issue with callback Task pops not occurring in some cases

3.7 May 2019

- Unpublished version

3.6 April 2019

- NOTE: Automatic association of accounts, contacts, leads, or contacts to call activity (Task) records based upon tab navigation has been deprecated. Automatic association of accounts, contact, leads or contacts to call activity (Task) records when a single match is made via ANI lookup OR by contact attribute is supported.
- NOTE: The "mini" Task page will be deprecated in future releases. The default setting is now "DEFAULT_TASK_LAYOUT".
- NOTE: Automatic pop of Tasks in an object's (Account, Contact, Lead, Case) subtab is only supported with the object (Account, Contact, Lead, Case) is open in a primary tab.
- Added support for queued callback calls
- Added support for specifying call types for which to create Task objects
- Added support for enabling / disabling automatic call duration updates of call activity (Task) objects.
- Fixed issue with secondary click-to-dial in console mode
- Fixed issue with Task pop occurring during call connecting when set to start of call
- Fixed issue with call context data remaining after a call has ended
- Fixed issue with contact attributes being displayed after a call has ended or has been missed
- Fixed issue with click to dial with ani match to multiple Salesforce objects

3.1 March 2019

- Added ability to specify DEFAULT_TASK_LAYOUT for the Call Activity Page setting
- Added ability to specify static values used during initial task creation
- Added support for Standard Lightning navigation
- Added support for secondary click-to-dial in Console mode
- Fixed issue with primary tab closing upon call activity (Task) save
- Fixed issue with Case handling and Task association

3.0 February 2019

- Removed requirement for Omni-channel to be enabled to perform installation
- Added ability to specify custom ringtone
- Added ability to enable or disable the automatic creation of task (call activity) objects
- Added ability to specify a page to select creation of Lead or Contact when an object with matching ANI is not found
- Added ability to specify task (call activity) object pop at the start of call, end of call, or to disable pop
- Added ability to edit task (call activity) subject
- Added automatic setting of whold and whatId on task (call activity) objects
- Added ability to specify a custom task pop page
- Added ability to include agent friendly name when creating task (call activity) objects for calls delivered to agent queues
- Added ability to add third call participant via click to dial
- Added call attributes display in classic mode
- Fixed call attributes display being persistent when no attributes are defined
- Added ability for automatic task creation on outbound calls
- Upgraded API to Amazon Connect Streams 1.3
- Added support for Lightning Flow Setup

Further Reading

For additional information, see the following:

- Amazon Connect CTI Adapter for Salesforce: <https://appexchange.salesforce.com/appxListingDetail?listingId=a0N3A00000EJH4yUAH>
- Amazon Connect User Guide: <https://docs.aws.amazon.com/connect/latest/userguide/using-amazon-connect.html>

- Amazon Connect Admin Guide: <https://docs.aws.amazon.com/connect/latest/adminguide/what-is-amazon-connect.html>
- Amazon Connect API Reference:
<https://docs.aws.amazon.com/connect/latest/APIReference>Welcome.html>
- Amazon Connect Release Notes: <https://docs.aws.amazon.com/connect/latest/adminguide/amazon-connect-release-notes.html>
- Amazon Connect FAQ: <https://aws.amazon.com/connect/faqs>

Key Benefits and Requirements

Key Benefits

The key benefits of the adapter include:

- **Amazon Connect Voice and Chat:** ability to take voice and chat calls in the salesforce agent experience and advanced screen pop on the incoming phone number, case, account or contact. Agents can also click to dial a number within their contacts.
- **Single Sign-On support:** seamless login with Connect and Salesforce with any standard SAML 2.0 provider.
- **IVR data dips:** easily inject salesforce data into the customer experience. Businesses can offer personalized greetings and dynamic routing based on customer information.
- **Call disposition and activity management:** configure post call workflows to support your Agent's after call work.
- **Omnichannel Presence Sync:** enable Salesforce chat, sms and email to share presence with Amazon Connect. Amazon Connect will know when an agent is handling a Salesforce chat and make them unavailable for a voice call, and vice versa.
- **Call logging and recording:** Voice and chat interactions can be logged as Salesforce activities and Amazon Connect call recordings can be played within the Salesforce.
- **Contact center real-time reports:** display real-time contact center metrics within Salesforce from Amazon Connect.
- **Contact center historical reports:** display historical contact center metrics within Salesforce from Amazon Connect.

- **Lightning CCP extensions:** easily customize and extend behaviors within the CTI Adapter such as screenpop and activity management. Default scripts along with the API guide provide key examples.
- **High-velocity sales (HVS):** using Salesforce HVS, enable your inside sales team to follow a repeatable pre-define sales cadence for your business. It enables sales managers and reps to work on prioritize list of prospects and follow best sequence of sales outreach activities defined by your sales process.

We recommend that you initially install the package into your Salesforce sandbox. After the package is installed, you can configure your Salesforce Call Center configuration within Salesforce.

The next step is to allowlist your Salesforce Visualforce domain within your Amazon Connect Application integration. This allows cross-domain access to your Amazon Connect instance.

If you want to quickly get setup with basic CTI capabilities in Lightning, we suggest you walk through our Salesforce trailhead available at <https://sfdc.co/Amazon-Connect>.

Requirements

To successfully create, configure, and implement the Amazon Connect CTI Adapter for Salesforce, you must ensure that the requirements and prerequisites described in this section are in place before you start.

Prerequisites

To install the Amazon Connect CTI package, you must:

1. Have a running instance of Salesforce Classic, Salesforce Console, or Lightning Experience
2. Create an Amazon Connect instance (<https://aws.amazon.com/connect/>)

Browser Compatibility

Amazon Connect requires WebRTC to enable soft-phone voice media stream and Websockets to enable soft-phone signaling. Consequently, users are required to use the latest version of either Google Chrome or Mozilla Firefox. For more information, please see the Amazon Connect documentation (<https://aws.amazon.com/connect/resources/#Documentation>)

Salesforce Lightning Support

Please note that following features are currently not supported in Salesforce Lightning:

- Outbound Campaign Calls using Salesforce Omni can be routed to the agent, but the automated screen pops and the dialing of the phone number will not work. The agent will have to click on the record links to open the records and use Salesforce's Click-to-Dial feature to make the phone call.
- Lightning Standard Navigation is not currently supported in App Options for the Amazon Connect CTI Adapter. Console navigation is fully supported.

Installing the Amazon Connect CTI Adapter for Salesforce Package

Lightning Flow Setup Installation

1. Navigate to **Service Setup** within the Lightning UI under the gear icon.
2. Click **View All**
3. Search for or select **Add Phone Support**
4. Click **Start** on the **Voice Setup** screen
5. Under **Select Your Voice Provider**, select Amazon Connect CTI Adapter
6. Agree to the terms and conditions and click **Install Package**
7. Under **Add Voice Service Provider Details**, add the URL to your Amazon Connect instance (see instructions below if you are unsure). You will also need to allowlist your Salesforce domain within Amazon Connect.
8. Under **Who's Answering the Phone?**, select the name of the users you would like to access the phone configuration. This can be modified later under the Call Center configuration.
9. Click **Finish**. You can also launch the Amazon Connect Setup Guide.

Installing from the Salesforce AppExchange

1. Log in into your Salesforce instance and open **Setup**.

Secure | https:// /one/one.app#/setup/SetupOneHome/home

Setup Home

Lightning Experience

2. Open the [Amazon Connect CTI Package URL](#), then choose **Install for Admins Only**.

Install Amazon Connect - Universal Package

By

Install for Admins Only

Install for All Users

Install for Specific Profiles...

Install **Cancel**

Install Amazon Connect - Universal Package

By Amazon AWS

i **Installation Complete!**
Please review the instructions below to properly configure this app. [View in another browser](#)

Done

3. Choose Done. The **Installed Packages** page opens.

The screenshot shows the 'Installed Packages' page in the Salesforce setup. At the top, there's a 'Help for this Page' link and a 'Visit AppExchange' button. The main table lists one package: 'Amazon Connect - Universal Package' by 'Amazon AWS' at version 2.3, with a namespace prefix of 'amazonconnect'. The package was installed on '20/09/2018 14:47'. It has 0 apps, 0 tabs, 2 objects, and 2 passed tests. A note below says 'Amazon Connect Integration to support Lightning, Console and Classic.'

4. In the Quick Find box, type **Call Center**, then choose **Call Centers**.

The screenshot shows the Salesforce navigation menu. The 'Setup' tab is selected. In the search bar, 'Call Center' is typed. Under 'Feature Settings', 'Service' is expanded, and 'Call Center' is selected. Within 'Call Center', 'Call Centers' is highlighted with a yellow box.

The Call Centers page opens. You should see 3 Call Center configurations: Classic, Console and Lightning.

All Call Centers

A call center corresponds to a single computer-telephony integration (CTI) system already in place at your organization. Salesforce.com users must be assigned to a call center before they can use any Call Center features.

Action	Name	Import	Version	Created Date	Last Modified Date
Edit Del	Amazon Connect CCP Adapter Classic		23/05/2018 13:27	23/05/2018 13:27	23/05/2018 13:27
Edit Del	Amazon Connect CCP Adapter Console		23/05/2018 13:27	23/05/2018 13:27	23/05/2018 13:27
Edit Del	Amazon Connect CCP Adapter Lightning		23/05/2018 13:27	23/05/2018 13:27	23/05/2018 13:27

Create the Softphone Layout

Next, we need to create a softphone layout for the solution.

The screenshot shows the Salesforce Setup interface under the Call Center category. The 'Softphone Layouts' section is selected. A sub-section titled 'Softphone Layouts' is displayed with a brief description: "A softphone is a customizable call control tool that appears in the sidebar of every salesforce.com page if a user is assigned to a call center and is working on a machine on which a CTI adapter has been installed. Similar custom softphone layouts and assign them to call center users based on their user profile." Below the description is a table with columns: Name, Default, Created By Alias, Created Date, Last Modified By Alias, and Last Modified Date. A note says "No records to display." At the top right of the table is a 'New' button.

6. In the **Quick Find** box, type **Softphone Layouts**, then choose **Softphone Layouts**.

7. Choose **New**.

Softphone Layout Edit

[Help for this Page](#)

Each softphone layout allows you to customize the appearance of a softphone for inbound, outbound, and internal calls. Assign softphone layouts to user profiles by clicking Layout Assignment in the Softphone Layouts page.

The screenshot shows the 'Softphone Layout Edit' page. At the top are 'Save' and 'Cancel' buttons. Below them is a 'Name' input field containing 'AmazonConnectDefault' and a checked 'Is Default Layout' checkbox. A 'Select Call Type' dropdown is set to 'Inbound'. The main area is titled 'Softphone Layout' and includes sections for 'Display these call-related fields:' (Caller ID, Dialed Number), 'Display these salesforce.com objects:' (Account, Contact, Lead), and a detailed list of object display rules for Account, Contact, and Lead. Each rule has an 'Edit' link next to it. A 'Help about this section' link is at the top right.

8. Enter a name for the layout, such as *AmazonConnectDefault*, then select the **Is Default Layout** checkbox.

Softphone Layout Edit

Each softphone layout allows you to customize the appearance of a softphone for inbound, outbo

The screenshot shows the 'Softphone Layout Edit' page again. The 'Name' input field now contains 'AmazonConnectDefault' and the 'Is Default Layout' checkbox is checked. The rest of the interface is identical to the previous screenshot.

9. Expand "Display these salesforce.com objects" and select objects that CTI Connector should be able to search, for a screen-pop query. In this example, besides default selection, I'm adding "Case", as I want to search and screen-pop by CaseID.

Display these salesforce.com objects:

▼ Account, Contact, Lead, Case

Available	Selections
Campaign Event Opportunity Task User	Account Contact Lead Case

Available **Selections**

Add Remove

Up Down

10. If necessary, configure the search behavior in the case that one or multiple records are found upon CTI search.

► If single Account found, display: Account Name <small>If multiple matches are found, only the Account Name is displayed in Salesforce Classic. In Lightning Experience, all the selected fields are displayed.</small>	Edit
► If single Contact found, display: Name <small>If multiple matches are found, only the Name is displayed in Salesforce Classic. In Lightning Experience, all the selected fields are displayed.</small>	Edit
► If single Lead found, display: Name <small>If multiple matches are found, only the Name is displayed in Salesforce Classic. In Lightning Experience, all the selected fields are displayed.</small>	Edit
► If single Case found, display: Case Number <small>If multiple matches are found, only the Case Number is displayed in Salesforce Classic. In Lightning Experience, all the selected fields are displayed.</small>	Edit

11. In this example, keep the default configuration, then choose **Save**.

Softphone Layout Edit

Each softphone layout allows you to customize the appearance of a softphone for inbound, outbound, a

Save Cancel

Name Is Default Layout

Softphone Layouts

A softphone is a customizable call control tool that appears in the sidebar of every salesforce.com page if a user is assigned to a call center and is working on a machine on which a CTI adapter has been installed. Similar to page layouts, you can create custom softphone layouts and assign them to call center users based on their user profile.

Action	Name	Default	Created By Alias	Created Date	Last Modified By Alias	Last Modified Date
Edit	AmazonConnectDefault	<input checked="" type="checkbox"/>	ASFDC	23/05/2018 13:48	ASFDC	23/05/2018 13:48

Set Access Permissions

All users must be assigned the required permission set to access the Salesforce metadata included in this package. The Amazon Connect CTI integration package comes with two Permission Sets, one for agents and one for managers, that grant the users all necessary access to use the softphone.

1. Log in into your Salesforce Org.
2. Navigate to **Setup > Manage Users > Permission Sets**.



SETUP

Permission Sets

Permission Sets

On this page you can create, view, and manage permission sets.

In addition, you can use the Salesforce mobile app to assign permission sets to a user. Download Salesforce from the App Store or Google Play: [iOS](#) | [Android](#)

[All Permission Sets](#) [Edit](#) | [Delete](#) | [Create New View](#)

[New](#)

Action	Permission Set Label	Description
<input type="checkbox"/>	Toolkit for Amazon Connect - Agent	Permissions to all components that an agent would need to use the toolkit.
<input type="checkbox"/>	Toolkit for Amazon Connect - Manager	Permissions required to access the toolkit reports.

2. Choose AC_Manager.

Assign Users

All Users

View: [All Users](#) [Edit](#) | [Create New View](#)

[Assign](#) [Cancel](#)

3. Choose Manage Assignments.

4. Choose Add Assignments.

5. Select the users to assign the permissions, then choose **Assign**. More information on assigning user permissions can be found at: https://help.salesforce.com/articleView?id=perm_sets_mass_assign.htm&type=5

AC_Administrator

Org Level Object Sharing Model	Object Access	Read	Create	Edit	Delete	View All	Modify All
Public	AC Agent Performance	<input checked="" type="checkbox"/>					
Public	AC Contact Channel Analytics	<input checked="" type="checkbox"/>					
Public	AC Contact Channels	<input checked="" type="checkbox"/>					
Public	AC Contact Trace Records	<input checked="" type="checkbox"/>					
Public	AC CTI Adapters	<input checked="" type="checkbox"/>					
Public	AC CTI Attributes	<input checked="" type="checkbox"/>					
Public	AC CTI Scripts	<input checked="" type="checkbox"/>					
Public	AC Events	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Public	AC Historical Queue Metrics	<input checked="" type="checkbox"/>					
Public	AC Presence Sync Rules	<input checked="" type="checkbox"/>					
Public	AC Queue Metric Events	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Public	AC Real Time Queue Metrics	<input checked="" type="checkbox"/>					
Private	AC Voicemail Drops	<input checked="" type="checkbox"/>					
Public	Amazon Connect Call Campaigns	<input checked="" type="checkbox"/>					

AC_Manager

Org Level Object Sharing Model	Object Access	Read	Create	Edit	Delete	View All	Modify All
Public	AC Agent Performance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Public	AC Contact Channel Analytics	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Public	AC Contact Channels	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Public	AC Contact Trace Records	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Public	AC CTI Adapters	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Public	AC CTI Attributes	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Public	AC CTI Scripts	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Public	AC Events	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Public	AC Historical Queue Metrics	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Public	AC Presence Sync Rules	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Public	AC Queue Metric Events	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Public	AC Real Time Queue Metrics	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Private	AC Voicemail Drops	<input checked="" type="checkbox"/>					
Public	Amazon Connect Call Campaigns	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

AC_Agent

Org Level Object Sharing Model	Object Access	Read	Create	Edit	Delete	View All	Modify All
Public	AC Agent Performance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Public	AC Contact Channel Analytics	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Public	AC Contact Channels	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Public	AC Contact Trace Records	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Public	AC CTI Adapters	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Public	AC CTI Attributes	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Public	AC CTI Scripts	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Public	AC Events	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Public	AC Historical Queue Metrics	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Public	AC Presence Sync Rules	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Public	AC Queue Metric Events	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Public	AC Real Time Queue Metrics	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Private	AC Voicemail Drops	<input checked="" type="checkbox"/>					
Public	Amazon Connect Call Campaigns	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Configure Console Experience

For the Console experience, we are going to use Sample Console application, but the procedure is the same for other applications.

The screenshot shows a navigation bar with several options: AmazonConnect SF..., Setup, Help, and Sample Console. The Sample Console dropdown is open, showing a list of links: Sales (which is highlighted with a blue background), Service, Marketing, App Launcher, Community, Site.com, Salesforce Chatter, Content, AppExchange, Developer Community, and Success Community.

In the top navigation bar, select the "+" icon.

The screenshot shows the top navigation bar with various tabs: Home, Chatter, Campaigns, Leads, Accounts, Contacts, Opportunities, Forecasts, Contracts, Orders, Cases, Solutions, Products, Reports, Dashboards, and a "+" icon. The "+" icon is highlighted with a red box.

All Tabs

Use the links below to quickly navigate to a tab. Alternatively, you can add a tab to your display to better suit the way you work.


The screenshot shows the "All Tabs" page with a "View:" dropdown set to "All Tabs". Below it is a grid of tabs. The "AC CTI Adapters" tab is highlighted with a red box. Other tabs include AC Contact Channel Analytics, AC Contact Trace Records, Accounts, AC Real Time Queue Metrics, AC Voicemail Drops, Analytics, App Launcher, Documents, Duplicate Record Sets, Engagement Channel Types, External Managed Accounts, Files, Forecasts, Groups, and Home.

Select "AC CTI Adapters"

Create a new adapter. Fill in the CTI Adapter Name. For the Call Center Definition Name, type in ACCConsoleAdapter. For the Amazon Connect Instance, type in the login url to the instance (this can be found in the Amazon Connect Instance details page), removing everything after ".com".

The screenshot shows the "Overview" section of the Amazon Connect console. It displays the Instance ARN, Directory, Service-linked role (AWSServiceRoleForAmazonConnect_x8eOtNYvgBDc9FIHHQc), and Login URL ([https://\[REDACTED\].awsapps.com/connect/login](https://[REDACTED].awsapps.com/connect/login)). On the left sidebar, under the "Overview" section, there are links for Telephony, Data storage, Data streaming, Application integration, and Contact flows.

Select Save.

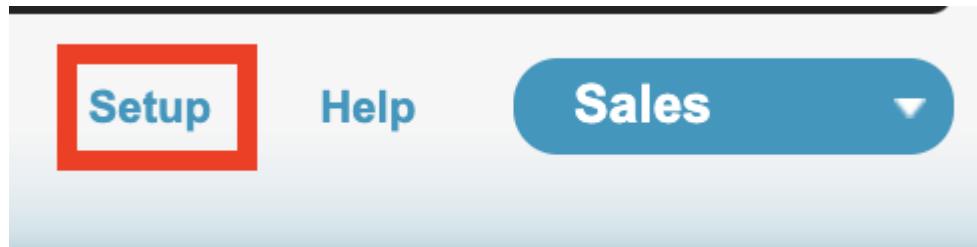

In the Quick Find field, type Visualforce Pages and select Visual Force Pages:



Take Salesfo

Run your business

Visualforce Pages



Expand All | Collapse All

Build Develop

Visualforce Pages

Security AC_RecordingViewer	AC_RecordingViewer	amazonconnect
Security AC_CtiScriptEditor	AC_CtiScriptEditor	amazonconnect
Security AC_LightningAdapter	AC_LightningAdapter	amazonconnect
Security AC_LightningScriptIncludes	AC_LightningScriptIncludes	amazonconnect
Security AC_RealTimeQueueMetrics	AC_RealTimeQueueMetrics	amazonconnect
Security AC_ClassicScriptIncludes	AC_ClassicScriptIncludes	amazonconnect
Security AC_ConsoleAdapter	AC_ConsoleAdapter	amazonconnect
Security AC_ConsoleScriptIncludes	AC_ConsoleScriptIncludes	amazonconnect
Security ACSFCCP_CallTask	ACSFCCP_CallTask	amazonconnect
Security ACSFCCP_ObjectType	ACSFCCP_ObjectType	amazonconnect
Security ACSFCCP_PostCallUpdateTask	ACSFCCP_PostCallUpdateTask	amazonconnect
Security AC_ClassicAdapter	AC_ClassicAdapter	amazonconnect
Security ACSFCCP_CallRecordingTask	ACSFCCP_CallRecordingTask	amazonconnect
Security ACSFCCP_CallLogging_View	ACSFCCP_CallLogging_View	amazonconnect

Security | [ACSFCCP_CallRecordingCase](#) [ACSFCCP_CallRecordingCase](#) amazonconnect

Security | [AC_HelperIncludes](#) [AC_HelperIncludes](#) amazonconnect

Security | [AC_HelperIncludesCcpV1](#) [AC_HelperIncludesCcpV1](#) amazonconnect

As we are currently setting up the Console experience, click on AC_ConsoleAdapter page.

Visualforce Page

amazonconnect__AC_ConsoleAdapter

Page Detail		Where is this used?	Preview	
Label	AC_ConsoleAdapter		Name	AC_ConsoleAdapter
Namespace Prefix	amazonconnect	Available for Lightning Experience, Lightning Communities, and the mobile app	<input type="checkbox"/>	
Require CSRF protection on GET requests	<input type="checkbox"/>		Description	

Click on the **Preview** button. A new browser tab will open with the URL of this page. It's going to be in this format:

https://sfcdlInstance--amazonconnect.visualforce.com/apex/AC_ConsoleAdapter

This is what we are going to use as "Origin URL" in our Amazon Connect configuration. From AWS Console, select Amazon Connect service and then select your Amazon Connect instance:

Amazon Connect > -test10

Overview

Instance ARN: arn:aws:connect:us-east-1:... instance/193a3ba0-...
Directory: -test10
Login URL: <https://...-test10.awsapps.com/connect/login>

Login as administrator

Select "Application Integration" on the left-hand side:

Amazon Connect > -test10

Application integration

Amazon Connect can integrate with other products including Customer Relationship Management (CRM) and Workforce Management (WFM) products. Click on the link for details on how to set up integrations with Amazon Connect. [Learn more](#)

Approved origins

Once you integrated with a CRM product, add the origins (scheme + host + port) that Amazon Connect will need to have access to.

+ Add origin

Click on "Add origin" link and enter the origin URL

Add origin



Enter origin URL

https://[REDACTED].visual.force.com

Cancel

Add

Click "Add" button

Application integration

Amazon Connect can integrate with other products including Customer Relationship Management (CRM) and Workforce Management (WFM) products. Click on the link for details on how to set up integrations with Amazon Connect. [Learn more](#)

Approved origins

Once you integrated with a CRM product, add the origins (scheme + host + port) that Amazon Connect will need to have access to.

https://[REDACTED].visual.force.com [remove](#)

[+ Add origin](#)

From the Setup screen, type Apps in Quick Find field and select Build>Create>Apps:

The screenshot shows the Salesforce Administer interface. On the left, there's a sidebar with sections like "Administer", "Build", and "Create". Under "Administer", the "Manage Apps" section is expanded, showing sub-options: "Connected Apps", "Connected Apps OAuth", "Usage", and "App Menu". Below that, the "Google Apps" section is also expanded, showing "Google Apps Settings". A search bar at the top has "Apps" typed into it.

You will be able to see all applications that are available in your account.

Apps					Quick Start	New	Reorder
Action	App Label	Console	Custom	Description			
Edit	App Launcher	<input type="checkbox"/>	<input type="checkbox"/>	App Launcher tabs			
Edit	Community	<input type="checkbox"/>	<input type="checkbox"/>	Salesforce CRM Communities			
Edit	Content	<input type="checkbox"/>	<input type="checkbox"/>	Salesforce CRM Content			
Edit	Marketing	<input type="checkbox"/>	<input type="checkbox"/>	Best-in-class on-demand marketing automation			
Edit	Platform	<input type="checkbox"/>	<input type="checkbox"/>	The fundamental Lightning Platform			
Edit	Sales	<input type="checkbox"/>	<input type="checkbox"/>	The world's most popular sales force automation (SFA) solution			
Edit	Salesforce Chatter	<input type="checkbox"/>	<input type="checkbox"/>	The Salesforce Chatter social network, including profiles and feeds			
Edit	Sample Console	<input checked="" type="checkbox"/>	<input type="checkbox"/>	(Salesforce Classic) Lets agents work with multiple records on one screen			
Edit	Service	<input type="checkbox"/>	<input type="checkbox"/>	Manage customer service with accounts, contacts, cases, and more			
Edit	Site.com	<input type="checkbox"/>	<input type="checkbox"/>	Build pixel-perfect, data-rich websites using the drag-and-drop Site.com application, and manage content and published sites.			

Click "Edit" next to the Sample Console application.

Scroll to the bottom of the page and "Assign to Profiles"

Assign to Profiles

Profile	<input type="checkbox"/> Visible	<input type="checkbox"/> Default
Analytics Cloud Integration User	<input type="checkbox"/>	<input type="checkbox"/>
Analytics Cloud Security User	<input type="checkbox"/>	<input type="checkbox"/>
Contract Manager	<input type="checkbox"/>	<input type="checkbox"/>
Cross Org Data Proxy User	<input type="checkbox"/>	<input type="checkbox"/>
Custom: Marketing Profile	<input type="checkbox"/>	<input type="checkbox"/>
Custom: Sales Profile	<input type="checkbox"/>	<input type="checkbox"/>
Custom: Support Profile	<input type="checkbox"/>	<input type="checkbox"/>
Force.com - App Subscription User	<input type="checkbox"/>	<input type="checkbox"/>
Identity User	<input type="checkbox"/>	<input type="checkbox"/>
Marketing User	<input type="checkbox"/>	<input type="checkbox"/>
Partner App Subscription User	<input type="checkbox"/>	<input type="checkbox"/>
Read Only	<input type="checkbox"/>	<input type="checkbox"/>
Solution Manager	<input type="checkbox"/>	<input type="checkbox"/>
Standard Platform User	<input type="checkbox"/>	<input type="checkbox"/>
Standard User	<input type="checkbox"/>	<input type="checkbox"/>
System Administrator	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Save **Save & New** **Cancel**

In this example, I'm assigning Sample console as Visible to System Administrator.

Choose **Save**.

From Setup, type Call Centers in the Quick Find field and select Call Centers.



 Take Salesforce with you
Run your business from any mobile device

Call Centers  

Expand All | Collapse All

Build

- Customize
- Call Center

Call Centers

Getting Started

 Build

Generate or copy

Recent Items beta

All Call Centers

A call center corresponds to a single computer-telephony integration (CTI) system already in place at your organization. Salesforce.com users must...

Action	Name	Import	Version
Edit Del	Amazon Connect CCP Adapter Classic		
Edit Del	Amazon Connect CCP Adapter Console		
Edit Del	Amazon Connect CCP Adapter Lightning		

Select "Amazon Connect CCP Adapter Console 3.9"

Call Center
AC Console Adapter
[All Call Centers](#) » AC Console Adapter

Call Center Detail

[Edit](#) [Delete](#) [Clone](#)

General Information

InternalName	ACConsoleAdapter
Display Name	AC Console Adapter
CTI Adapter URL	/apex/amazonconnect__AC_ConsoleAdapter?ccpVersion=2
Softphone Height	544
Softphone Width	325
Use CTI API	true
Salesforce Compatibility Mode	Classic
Default CallCenter	true
Package Namespace	amazonconnect

Replace the **CTI Adapter URL** with the AC Lightning Adapter visualforce page url you copied in the previous section. If you wish to specify your version of the ccp user interface, add "?ccpVersion=x", where

x is the version of the ccp (either 1 or 2). Click on the Save button.

Click on the "Manage Call Center Users" button at the bottom of the page.

The screenshot shows a table with one row containing the text 'Total 0'. Above the table, there is a header bar with the title 'Call Center Users' and a button labeled 'Manage Call Center Users'.

Total 0

Call Center Amazon Connect CCP Adapter Console: Manage Users

All Call Centers » Amazon Connect CCP Adapter Console » Manage Users

View: All Create New View

The screenshot shows a table with two columns: 'Full Name' and 'Alias'. A button labeled 'Add More Users' is located above the table, and a button labeled 'Remove Users' is located to its right. The message 'No records to display.' is visible below the table.

Full Name	Alias
No records to display.	

Add More Users Remove Users

Call Center

Amazon Connect CCP Adapter Console: Search for New Users

All Call Centers » Amazon Connect CCP Adapter Console » Manage Users » Search for New Users

Set the search criteria below and then click Search to find salesforce.com users who should be enabled as :

The screenshot shows a search interface with five dropdown filters. To the right of each filter is an 'AND' connector. Below the filters is a section titled 'Filter By Additional Fields (Optional):' containing three bullet points:

- You can use "or" filters by entering multiple items in the third column, separated by commas.
- For date fields, enter the value in following format: 23/05/2018
- For date/time fields, enter the value in following format: 23/05/2018 15:07

Find

Set filters and click on the Find button. Select the checkbox next to the user and click "Add to Call Center" button.

The screenshot shows a table with columns: 'Full Name', 'Alias', 'Username', 'Role', and 'Profile'. The 'Role' and 'Profile' columns are populated with 'System Administrator', 'Analytics Cloud Integration User', and 'Analytics Cloud Security User'. The 'Full Name' column has a checkbox next to it, which is checked for the first user. There are 'Add to Call Center' and 'Cancel' buttons at the top of the dialog.

Full Name	Alias	Username	Role	Profile
<input checked="" type="checkbox"/> SFDCDryRun_AmazonConnect	ASfdc	acsfddryrun ^(*)	System Administrator	
<input type="checkbox"/> User_Integration	integ	integration@00d0n000001bsn5uaa.com	Analytics Cloud Integration User	
<input type="checkbox"/> User_Security	sec	Insightssecurity@00d0n000001bsn5uaa.com	Analytics Cloud Security User	

Repeat the steps to add more users.

Amazon Connect CCP Adapter Console: Manage Users


All Call Centers » Amazon Connect CCP Adapter Console » Manage Users

View: All Create New View


Action	Full Name ↑	Alias	Username
<input type="checkbox"/> Remove	SFDCDryRun, AmazonConnect	ASFDC	acsfdcdryrun

Add More Users Remove Users


From the top-right corner, select Sample Console application.

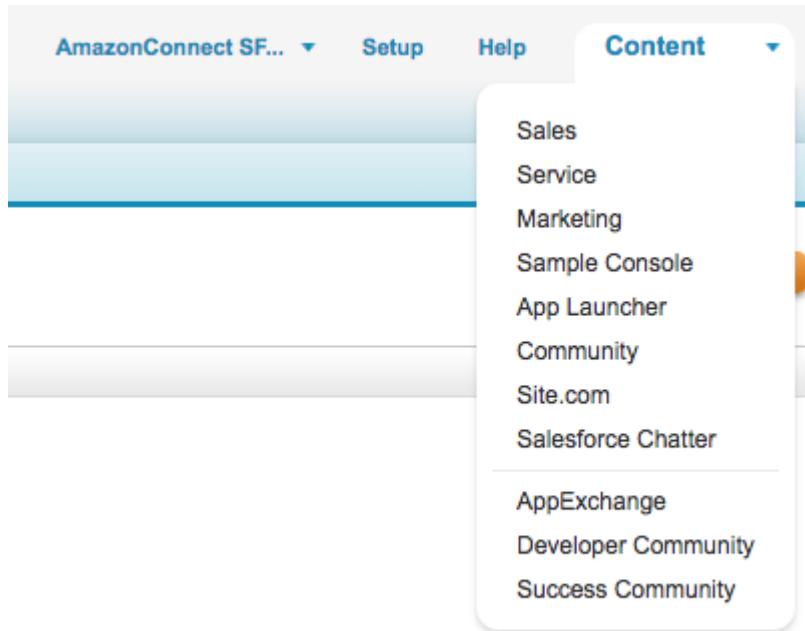

In the bottom-right corner, you will be able to see the Phone button.

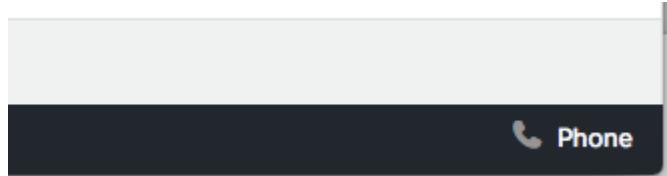

Click on the Phone button to open the softphone pop-up.

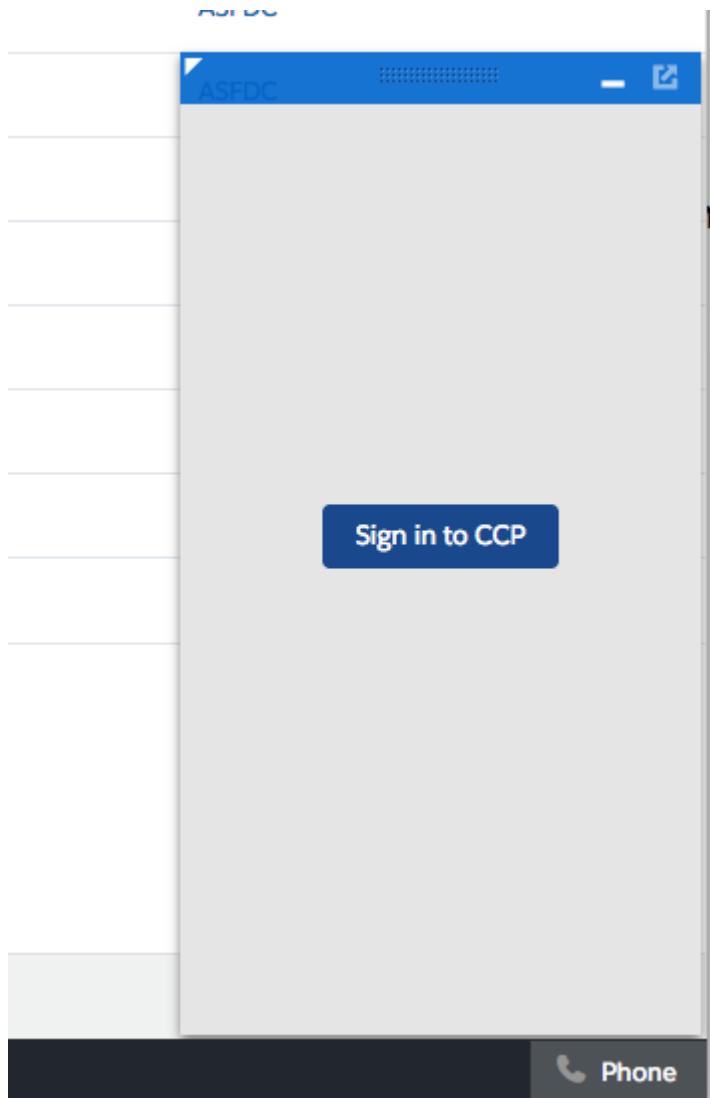

You will need to Sign in into your Amazon Connect CCP. Click on the Sign in to CCP button. A new modal pop-up will show, asking you to enter your credentials.

test10 - AWS Apps Authentication

O | P | Q | R | S | T | U | V | W | X | Y | Z | Other | All |

Secure | https://[REDACTED]-test10.awsapps.com/auth/?clie...

ACCOUNT OWNER ALIAS

ASFDC

ASFDC

ASFDC

ASFDC

ASFDC

ASFDC

Sign In


Forgot Password?

Sign in to CCP


Phone

Page 1 of 1


Enter your credentials and click Sign in. Allow Microphone access (if asked by browser). Once login is successful, the pop-up window will automatically close.

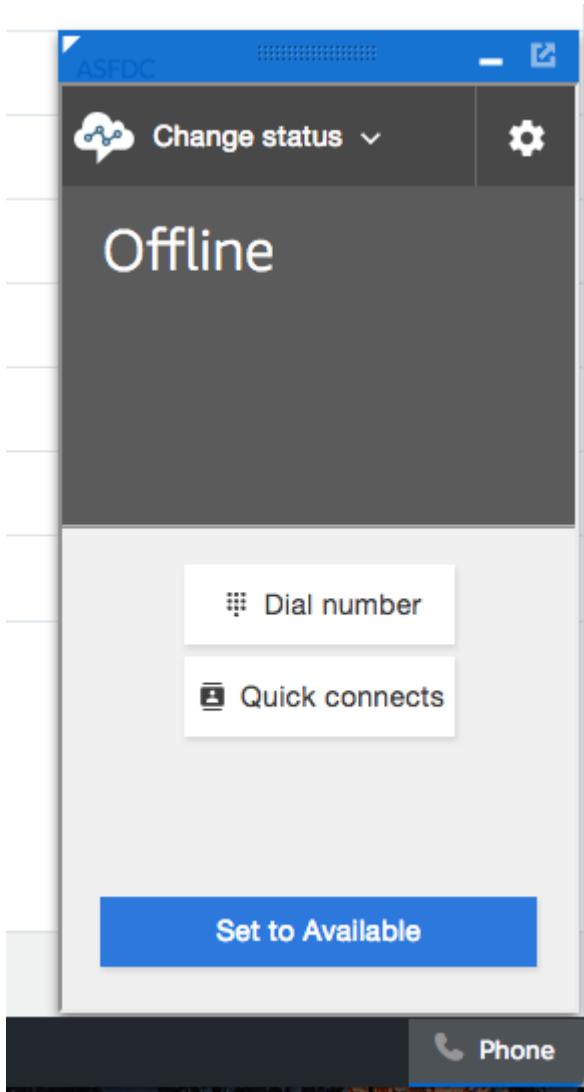

Select "Change status" and select "Available".

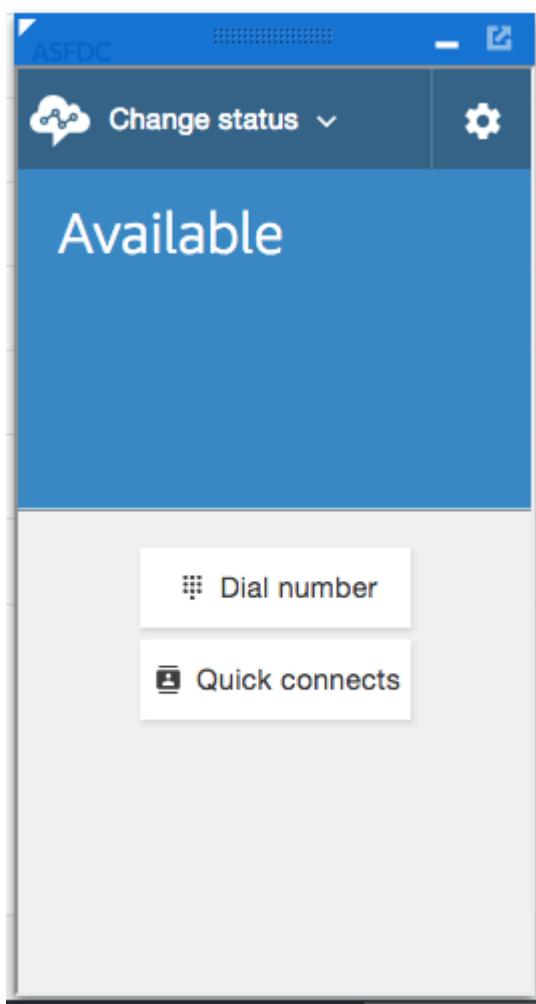

Make an inbound phone call to your Amazon Connect instance. The CCP is going to "ring" and you can answer the call.

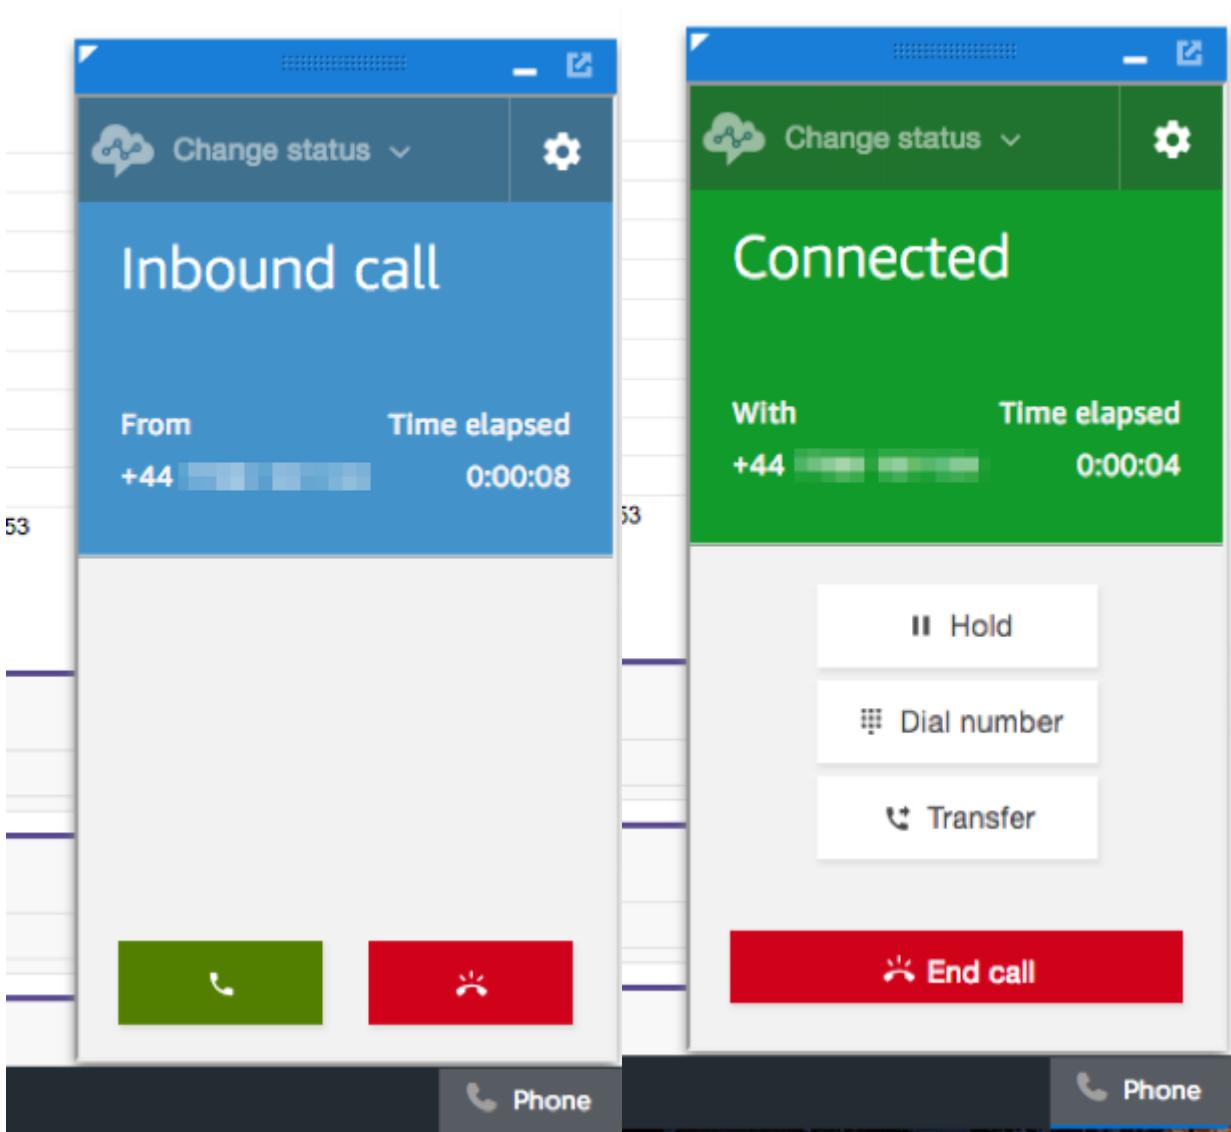

Configure Classic Experience

The Salesforce Classic is the easiest to configure, but it has some limitations. Most important limitation is that, with Classic layout, there are no tabs and modal containers, so each time new object is selected, a full page reload occurs. This full reload causes softphone to be reloaded too, which could cause an issue in the voice call audio stream. Because of that, in the Classic environment, we have to run a separate instance of softphone (CPP) which will carry the audio, while embedded instance of CCP can be used for call control and screen-pop functionality.

First, we have to configure Amazon Connect integration.

The screenshot shows the 'Sample Console' dropdown menu open. The 'Sales' option is highlighted with a blue background and white text. Other options listed include Service, Marketing, App Launcher, Community, Site.com, Salesforce Chatter, Content, AppExchange, Developer Community, and Success Community.

From the top right corner, select the Sales application.

In the top navigation bar, select the "+" icon.

The screenshot shows the 'All Tabs' page within the Sales application. The top navigation bar includes links for Home, Chatter, Campaigns, Leads, Accounts, Contacts, Opportunities, Forecasts, Contracts, Orders, Cases, Solutions, Products, Reports, Dashboards, and a '+'. Below the navigation bar, there is a 'View:' dropdown set to 'All Tabs'. The page lists several tabs with icons: AC Contact Channel Analytics, AC Contact Trace Records, Accounts, AC CTI Adapters (which is highlighted with a red box), AC Real Time Queue Metrics, AC Voicemail Drops, Analytics, App Launcher, Documents, Duplicate Record Sets, Engagement Channel Types, External Managed Accounts, Files, Forecasts, Groups, and Home. The 'AC CTI Adapters' tab is selected.

Select "AC CTI Adapters"

Create a new adapter. Fill in the CTI Adapter Name. For the Call Center Definition Name, type in ACCConsoleAdapter. For the Amazon Connect Instance, type in the login url to the instance (this can be found in the Amazon Connect Instance details page), removing everything after ".com".

Overview

Telephony

Data storage

Data streaming

Application integration

Contact flows


Instance ARN: [REDACTED]

Directory: [REDACTED]

Service-linked role ⓘ AWSServiceRoleForAmazonConnect_x8eOtNYvgBDc9FlXHHQc [Learn more](#)

Login URL: [https://\[REDACTED\].awsapps.com/connect/login](https://[REDACTED].awsapps.com/connect/login)

Select Save.

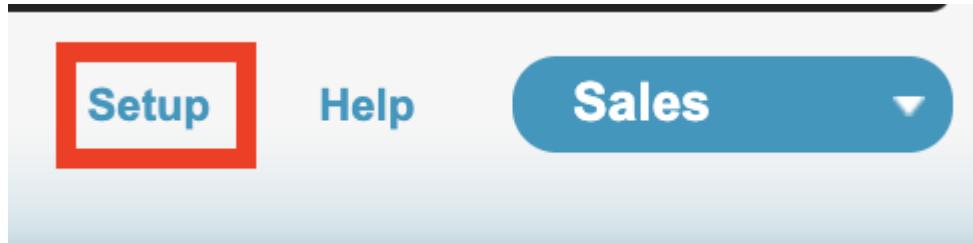

In the Quick Find field, type Visualforce Pages and select Visual Force Pages:



Take Salesfo

Run your business

Visualforce Pages



Expand All | Collapse All

Build Develop

Visualforce Pages

Security AC_RecordingViewer	AC_RecordingViewer	amazonconnect
Security AC_CtiScriptEditor	AC_CtiScriptEditor	amazonconnect
Security AC_LightningAdapter	AC_LightningAdapter	amazonconnect
Security AC_LightningScriptIncludes	AC_LightningScriptIncludes	amazonconnect
Security AC_RealTimeQueueMetrics	AC_RealTimeQueueMetrics	amazonconnect
Security AC_ClassicScriptIncludes	AC_ClassicScriptIncludes	amazonconnect
Security AC_ConsoleAdapter	AC_ConsoleAdapter	amazonconnect
Security AC_ConsoleScriptIncludes	AC_ConsoleScriptIncludes	amazonconnect
Security ACSFCCP_CallTask	ACSFCCP_CallTask	amazonconnect
Security ACSFCCP_ObjectType	ACSFCCP_ObjectType	amazonconnect
Security ACSFCCP_PostCallUpdateTask	ACSFCCP_PostCallUpdateTask	amazonconnect
Security AC_ClassicAdapter	AC_ClassicAdapter	amazonconnect
Security ACSFCCP_CallRecordingTask	ACSFCCP_CallRecordingTask	amazonconnect
Security ACSFCCP_CallLogging_View	ACSFCCP_CallLogging_View	amazonconnect

Security | [ACSFCCP_CallRecordingCase](#) [ACSFCCP_CallRecordingCase](#) amazonconnect

Security | [AC_HelperIncludes](#) [AC_HelperIncludes](#) amazonconnect

Security | [AC_HelperIncludesCcpV1](#) [AC_HelperIncludesCcpV1](#) amazonconnect

As we are currently setting up the Classic experience, click on AC_ClassicAdapter page

Visualforce Page

amazonconnect_AC_ClassicAdapter

Page Detail

Label	AC_ClassicAdapter	Name	AC_ClassicAdapter
Namespace Prefix	amazonconnect	Available for Lightning Experience, Lightning Communities, and the mobile app	<input type="checkbox"/>
Require CSRF protection on GET requests	<input type="checkbox"/>	Description	

Click on the Preview button. New browser tab will open with the URL of this page. It's going to be in this format:

https://sfdclnstance--amazonconnect.visualforce.com/apex/AC_ClassicAdapter

This is what we are going to use as "Origin URL" in our Amazon Connect configuration. From AWS Console, select Amazon Connect service and then select your Amazon Connect instance:

Amazon Connect > -test10

Overview	Overview
Telephony	Instance ARN arn:aws:connect:us-east-1:-test10:instance/193a3ba0-
Data storage	Directory -test10
Data streaming	Login URL <a href="https:// -test10.awsapps.com/connect/login">https://-test10.awsapps.com/connect/login
Application integration	Login as administrator
Contact flows	

Select "Application Integration" on the left-hand side:

Amazon Connect > -test10

Overview	Application integration
Telephony	Amazon Connect can integrate with other products including Customer Relationship Management (CRM) and Workforce Management (WFM) products. Click on the link for details on how to set up integrations with Amazon Connect. Learn more
Data storage	
Data streaming	
Application integration	Approved origins
Contact flows	Once you integrated with a CRM product, add the origins (scheme + host + port) that Amazon Connect will need to have access to.
	+ Add origin

Click on "Add origin" link and enter the origin URL

Add origin



Enter origin URL

https://[REDACTED].visual.force.com

Cancel

Add

Click "Add" button

Application integration

Amazon Connect can integrate with other products including Customer Relationship Management (CRM) and Workforce Management (WFM) products. Click on the link for details on how to set up integrations with Amazon Connect. [Learn more](#)

Approved origins

Once you integrated with a CRM product, add the origins (scheme + host + port) that Amazon Connect will need to have access to.

https://[REDACTED].visual.force.com [remove](#)

[+ Add origin](#)

From the Salesforce Classic layout, select Setup then type Call Centers in the Quick Find field and select Call Centers.


[Home](#) [Chatter](#) [Libraries](#) [Content](#) [Subscriptions](#)


Take Salesforce with you

Run your business from any mobile device.


[Expand All](#) | [Collapse All](#)

Build

 [Customize](#)
 [Call Center](#)
[Call Centers](#)

Getting Started



Build

Generate or copy



Recent Items beta

All Call Centers

A call center corresponds to a single computer-telephony integration (CTI) system already in place at your organization. Salesforce.com users must...

Action	Name	Import	Version
Edit Del	Amazon Connect CCP Adapter Classic		
Edit Del	Amazon Connect CCP Adapter Console		
Edit Del	Amazon Connect CCP Adapter Lightning		

Select "Amazon Connect CCP Adapter Classic 3.9"

Call Center Detail

[Edit](#)
[Delete](#)
[Clone](#)

General Information

InternalName	ACClassicAdapter
Display Name	AC Classic Adapter
CTI Adapter URL	/apex/amazonconnect__AC_ClassicAdapter?ccpVersion=2
Softphone Height	460
Softphone Width	200
Use CTI API	true
Salesforce Compatibility Mode	Classic
Default CallCenter	true
Package Namespace	amazonconnect

Replace the **CTI Adapter URL** with the AC Lightning Adapter visualforce page url you copied in the previous section. If you wish to specify your version of the ccp user interface, add "?ccpVersion=x", where x is the version of the ccp (either 1 or 2). Click on the Save button.

Click on the "Manage Call Center Users" button at the bottom of the page.

Call Center Amazon Connect CCP Adapter Classic: Manage Users

All Call Centers » Amazon Connect CCP Adapter Classic » Manage Users

View: All Create New View

Click on the "Add More Users" button.

Call Center Amazon Connect CCP Adapter Classic: Search for New Users

All Call Centers » Amazon Connect CCP Adapter Classic » Manage Users » Search for New Users

Set the search criteria below and then click Search to find salesforce.com users who should be enabled as

Set filters and click on the Find button. Select the checkbox next to the user and click "Add to Call Center" button.

Add to Call Center	Cancel			
<input type="checkbox"/> Full Name	Alias	Username	Role	Profile
<input checked="" type="checkbox"/> SFDCDryRun_AmazonConnect	ASFDC	acsfddryrun@00d0n000001bsn5uaa.com		System Administrator
<input type="checkbox"/> User_Integration	integ	integration@00d0n000001bsn5uaa.com		Analytics Cloud Integration User
<input type="checkbox"/> User_Security	sec	insightssecurity@00d0n000001bsn5uaa.com		Analytics Cloud Security User

Repeat the steps to add more users.

Call Center


Amazon Connect CCP Adapter Classic: Manage Users

All Call Centers » Amazon Connect CCP Adapter Classic » Manage Users


View: All Create New View

Action	Full Name	Alias	Username
<input type="checkbox"/> Remove	SFDCDryRun_AmazonConnect	ASfdc	acsfcdcdryrun

Add More Users Remove Users

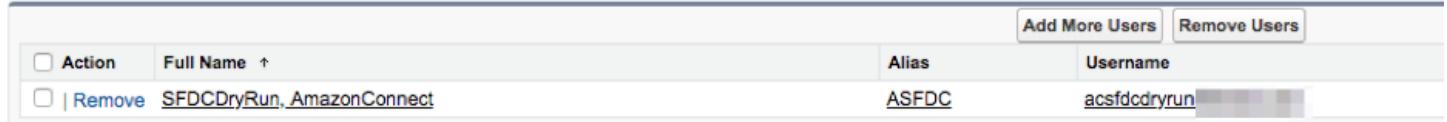

From the top-right corner, select Sales application.

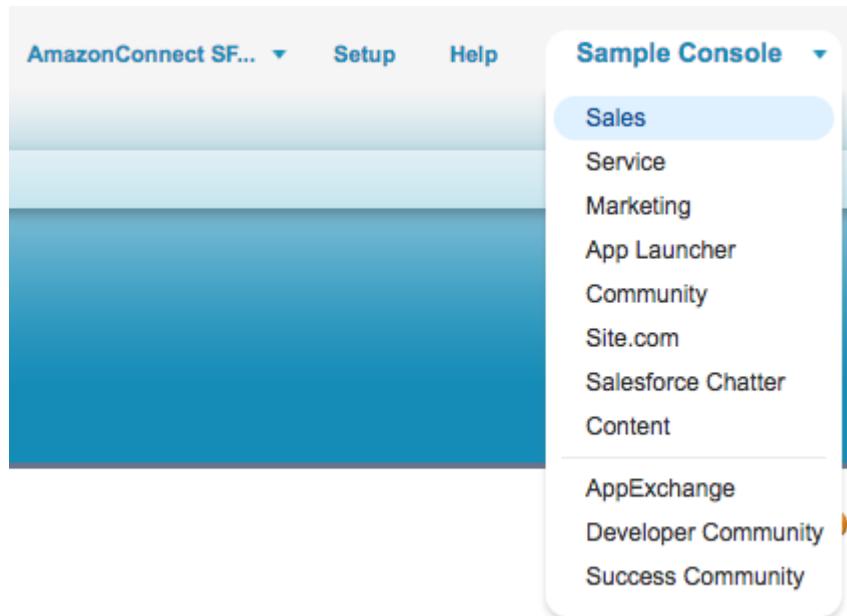

AmazonConnect SF... ▾ Setup Help

Sample Console ▾

- Sales
- Service
- Marketing
- App Launcher
- Community
- Site.com
- Salesforce Chatter
- Content
- AppExchange
- Developer Community
- Success Community

On the left-hand side, you will be able to see the Phone container.



Search...

Search

[Home](#) [Chatter](#) [Campaigns](#) [Leads](#) [Accounts](#) [Contacts](#) [Opportunities](#) [Forecasts](#) [Contracts](#) [Orders](#) [Cases](#)

AmazonConnect SFDCDryRun

Wednesday 23 May 2018

[Hide Feed](#)[Post](#)[File](#)[New Event](#)[More](#)

Share an update, @mention someone...

[Share](#)[Sort By Latest Posts](#)[Sign in to CCP](#)

There are no updates.

Calendar

[New Event](#)**Today 23/05/2018**

You have no events scheduled for the next 7 days.

[Create New...](#)

You will need to Sign in into your Amazon Connect CCP. Click on the Sign in to CCP button. A new browser tab will open, asking you to enter your credentials.



Amazon Connect

Please log in with your [\[REDACTED\]-test10](#) credentials


Username

Password

[Sign In](#)

[Forgot Password?](#)

Enter your credentials and click Sign in. Allow Microphone access (if asked by browser). Once Login is successful, the new tab with CCP will stay open, as this tab is going to carry the audio for voice calls.

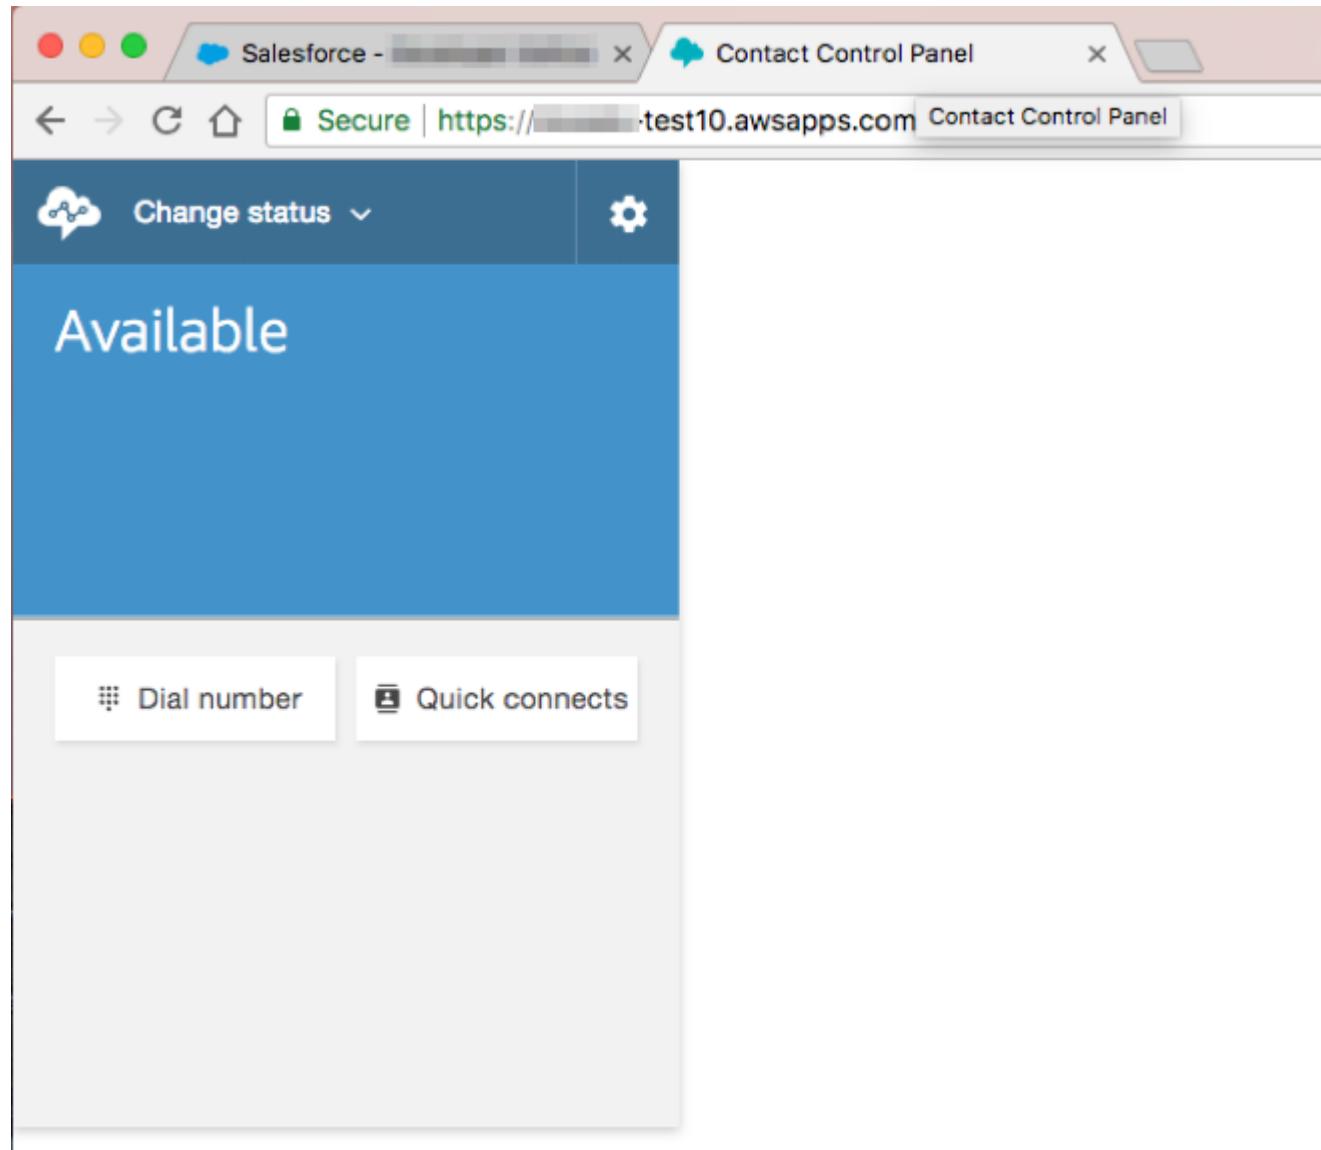

Switch back to Salesforce tab in your browser.


The screenshot shows the Salesforce Contact Control Panel interface. At the top, there are tabs for Home, Chatter, Campaigns, Leads, Accounts, Contacts, Opportunities, Forecasts, Contracts, Orders, and Cases. The Chatter tab is active.

In the center, the Chatter feed displays a post from 'AmazonConnect SFDCDryRun' dated Wednesday 23 May 2018. Below the post are buttons for Post, File, New Event, and More. A text input field says 'Share an update, @mention someone...' with a Share button. A search bar and a 'Sort By Latest Posts' dropdown are also present.


On the left, a sidebar titled 'Offline' shows status controls: 'Change status' (dropdown), 'Dial number', 'Quick connects', and a large blue 'Set to Available' button.

At the bottom, the Calendar section shows 'Today 23/05/2018' and a message stating 'You have no events scheduled for the next 7 days.' A 'New Event' button is located in the top right corner of the calendar area.

Select "Change status" and select "Available".

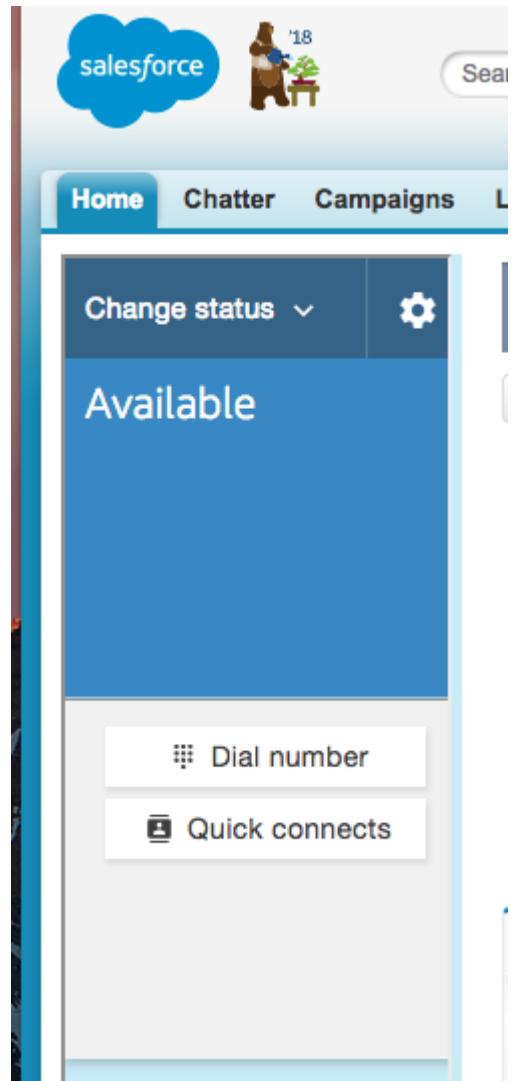

Make an inbound phone call to your Amazon Connect instance. The CCP is going to "ring" and you can answer the call.

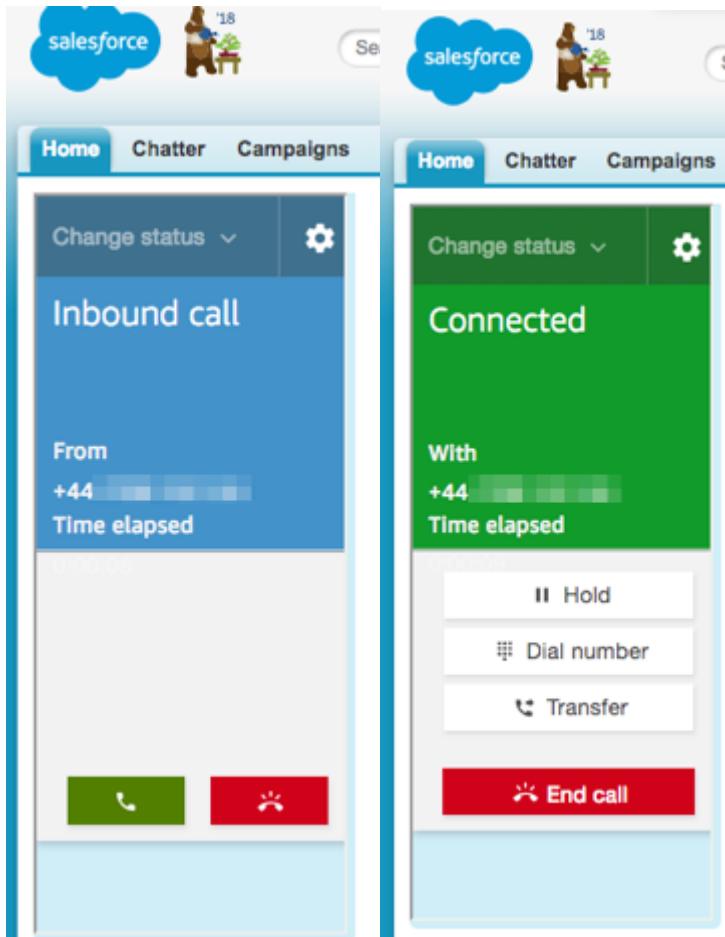

Some CTI Flow features will reload the page the agent is currently on. The page is fully reloaded, but the softphone preserved the audio stream, as another instance of CCP was running in the 2nd tab. If the 2nd tab is closed, the audio will be lost. The 2nd CCP instance can also run in a separate browser window, if preferred.

Go to Salesforce Setup page and type Call Centers in Quick Find, then select Call Centers.

All Call Centers

A call center corresponds to a single computer-telephony integration (CTI) system already in place at your organization. Salesforce.com users must have the appropriate permissions to view and manage call centers.

Action	Name	Import	Version
Edit Del	Amazon Connect CCP Adapter Classic		
Edit Del	Amazon Connect CCP Adapter Console		
Edit Del	Amazon Connect CCP Adapter Lightning		

Select "Amazon Connect CCP Classic"

Amazon Connect CCP Adapter Classic

All Call Centers » Amazon Connect CCP Adapter Classic

Call Center Detail

[Edit](#) [Delete](#) [Clone](#)

Amazon Connect Salesforce CCP Adapter

Internal Name	AmazonConnectSFCCPAdapterClassic
Display Name	Amazon Connect CCP Adapter Classic
Description	Amazon Connect Call Center
CTI Adapter URL	/apex/ACSFCCP_Classic
Use CTI API	true
Softphone Height	400
Softphone Width	250
Salesforce Compatibility Mode	Classic


Click on the Edit button and find the "Amazon Connect CCP Login Popup" field. By default, this field is set to "false", which means that Login Popup will be opened in a 2nd tab. If we change this value to "true", then Login Popup will be opened in a new browser window.

You may also notice that "Amazon Connect CCP Medialess" field is set to "true". This basically means that embedded CCP instance will not carry any media. Set the value to "true" and click on the Save button. Go back to Sales application. If CCP is already logged in, please log out.


The screenshot shows the Salesforce home page with the following elements:

- Header:** Shows the Salesforce logo, a user icon with '18' notifications, a search bar, and a 'Search' button.
- Top Navigation:** Includes links for Home, Chatter, Campaigns, Leads, Accounts, Contacts, and Opportunities.
- Left Sidebar:** Contains a 'Sign in to CCP' button.
- Feed Area:** Displays a post from 'AmazonConnect SFDCDryRun' dated 'Wednesday 23 May 2018'. It includes a 'Hide Feed' button and a text input field for sharing updates.
- Search and Sort:** Includes a search bar and a 'Sort By Latest Posts' dropdown.
- Message Area:** States 'There are no updates.'
- Calendar Section:** Titled 'Calendar', it shows 'Today 23/05/2018' and the message 'You have no events scheduled for the next 7 days.'

Click on the "Sign in to CCP" button and new browser window will open, asking you for credentials.

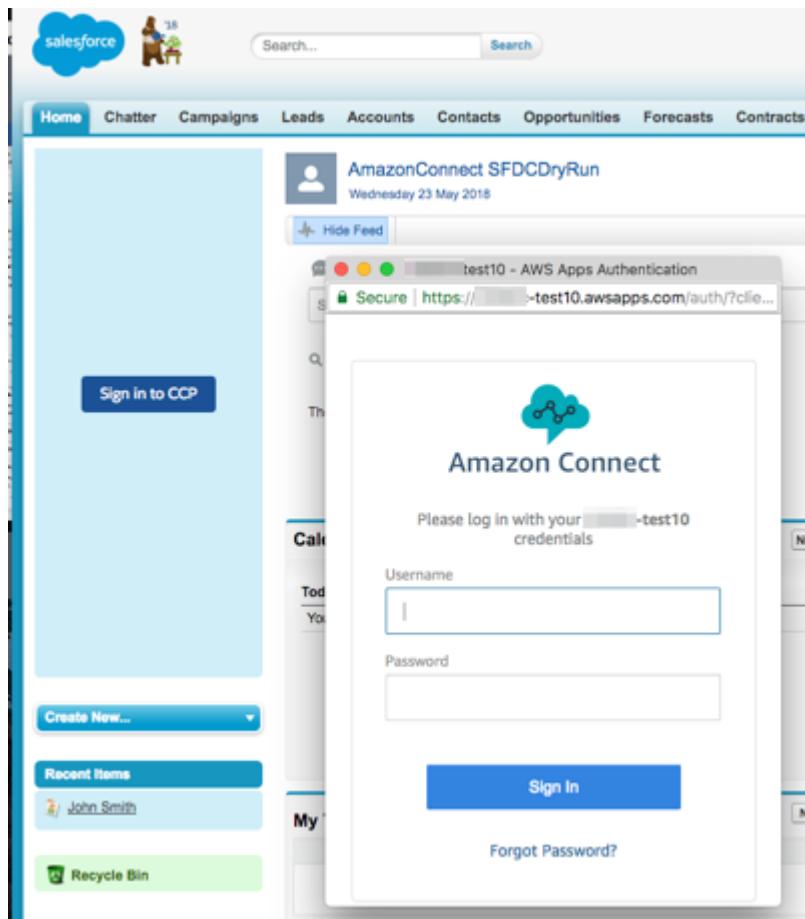

Enter your credentials and click Sign In. The CCP application will login, but popup window will stay open and it will host the 2nd CCP which will carry the audio stream. This window can be minimized or moved to 2nd screen.

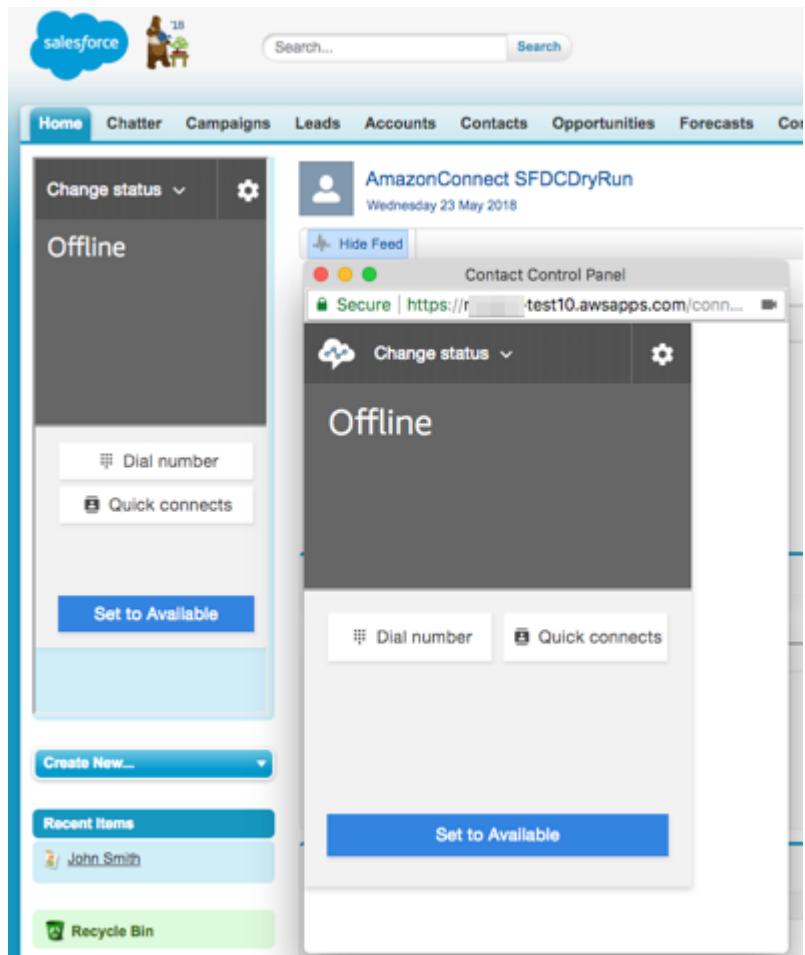


Installing the Amazon Connect Salesforce Lambda Package

This section will guide you through the installation process of Amazon Connect Salesforce Lambda package, which is hosted in AWS Serverless Application Repository.

The AWS Serverless Application Repository enables you to quickly deploy code samples, components, and complete applications. Each application is packaged with an AWS Serverless Application Model (SAM) template that defines the AWS resources used. There is no additional charge to use the Serverless Application Repository - you only pay for the AWS resources used in the applications you deploy.

How it works: Deploying applications

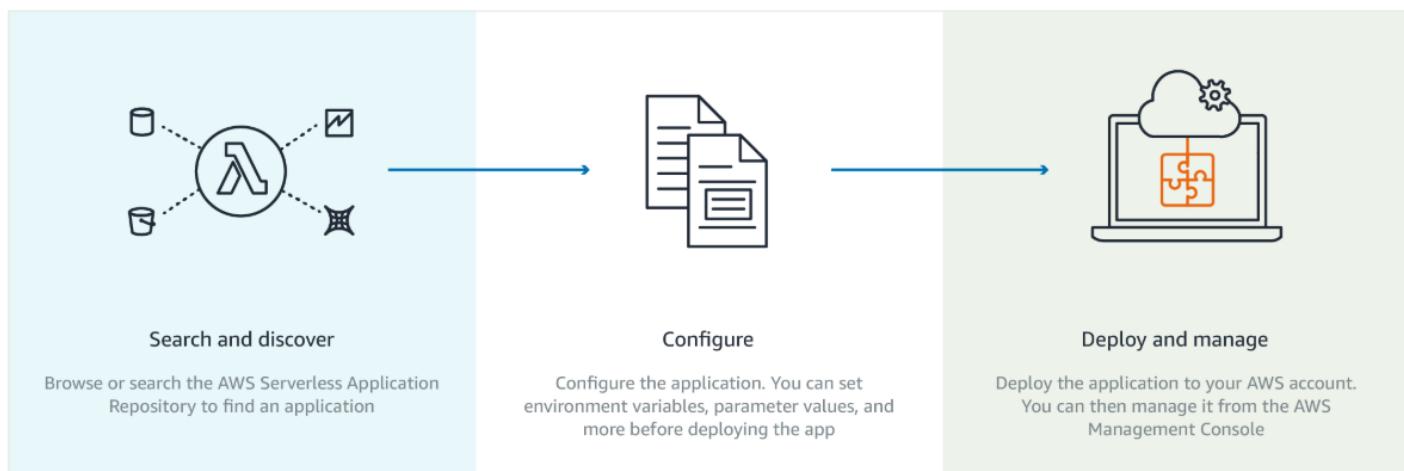

Salesforce Lambda Prerequisites

Consider the following prerequisites before you install the Lambda package.

Determine your production Environment

In your installation notes, enter the value for "Production Environment" as "true" or "false", depending on whether the Salesforce environment that you are deploying the package into is a production or a sandbox. For Production, enter "true". For Sandbox enter "false".

Determine your Consumer Key and Secret

To leverage the full potential of the integration, Salesforce data needs to be accessed from AWS environment. The AWS Serverless package comes with a set of pre-built queries to lookup, update and create Salesforce objects within Amazon Connect Contact Flows, in form of AWS Lambda functions.

The Lambda function access Salesforce using the Salesforce REST API. To get access to the environment, a Connected App must be configured with OAuth settings enabled.

1. Log in to Salesforce

2. Navigate to Setup > Create > Apps

Apps

Help for this Page

An app is a group of tabs that work as a unit to provide functionality. Users can switch between apps using the app drop-down menu at the top-right corner of every page.

You can customize existing apps to match the way you work, or build new apps by grouping standard and custom tabs.

Custom apps work in conjunction with User Profile Tab Visibility settings. [View User Profiles now.](#)

Action	App Label	Console	Custom	Description
Edit	App Launcher	<input type="checkbox"/>	<input type="checkbox"/>	App Launcher tabs
Edit	Community	<input type="checkbox"/>	<input type="checkbox"/>	Salesforce CRM Communities
Edit	Content	<input type="checkbox"/>	<input type="checkbox"/>	Salesforce CRM Content
Edit	Marketing	<input type="checkbox"/>	<input type="checkbox"/>	Best-in-class on-demand marketing automation
Edit	Platform	<input type="checkbox"/>	<input type="checkbox"/>	The fundamental Lightning Platform
Edit	Sales	<input type="checkbox"/>	<input type="checkbox"/>	The world's most popular sales force automation (SFA) solution
Edit	Salesforce Chatter	<input type="checkbox"/>	<input type="checkbox"/>	The Salesforce Chatter social network, including profiles and feeds
Edit	Sample Console	<input checked="" type="checkbox"/>	<input type="checkbox"/>	(Salesforce Classic) Lets agents work with multiple records on one screen
Edit	Service	<input type="checkbox"/>	<input type="checkbox"/>	Manage customer service with accounts, contacts, cases, and more
Edit	Site.com	<input type="checkbox"/>	<input type="checkbox"/>	Build pixel-perfect, data-rich websites using the drag-and-drop Site.com application, and manage content and published sites.

Subtab Apps

Action	App Label	Description
Edit	Profile (Others)	The tabs displayed when users view someone else's profile
Edit	Profile (Self)	The tabs displayed when users view their own profile

Connected Apps

Action	Connected App Name	Description	Version
New			

3. Click on the "New" button for the Connected Apps at the bottom of the page

4. In the following form, fill out the Connected App Name, API Name and Contact Email with values of your choice. We recommend "Amazon Connect Integration" as the Connected App Name and the default value for the API name.

New Connected App

[Save](#) [Cancel](#)

Basic Information

Connected App Name	<input type="text" value="Amazon Connect Integration"/>
API Name	<input type="text" value="Amazon_Connect_Integration"/>
Contact Email	<input type="text"/>

5. Select the checkbox next to "Enable OAuth Settings" as shown below.

▼ API (Enable OAuth Settings)

Enable OAuth Settings

6. Ensure the Callback URL is set to <https://www.salesforce.com>

API (Enable OAuth Settings)

Enable OAuth Settings	<input checked="" type="checkbox"/>
Enable for Device Flow	<input type="checkbox"/>
Callback URL	<input type="text" value="https://www.salesforce.com"/>

7. Ensure Selected OAuth Scopes has the following values selected:

- a. Access and manage your data (api)
- b. Access your basic information (id, profile, email, address, phone)

The screenshot shows three panels: 'Selected OAuth Scopes' (empty), 'Available OAuth Scopes' (containing various API options like Chatter, Eclair, Wave, etc.), and 'Selected OAuth Scopes' (containing 'Access and manage your data (api)' and 'Access your basic information (id, profile, email, address, phone)'). Between the available and selected scopes are 'Add' and 'Remove' buttons.

8. Select the checkbox "Require Secret for Web Server Flow"



9. Click "Save" at the bottom of the screen.

10. Click "Continue" on the next screen

New Connected App

Allow from 2-10 minutes for your changes to take effect on the server before using the connected app.

[Continue](#) [Cancel](#)

11. Once the app has been created, on the app's detail screen, please copy the "Consumer Key" value to your installation notes

A screenshot of a page with 'API (Enable OAuth Settings)' at the top. It shows 'Consumer Key' as 3MVG9TSaZB... and 'Consumer Secret' as bOcgUMSvusvy. Below this, there are 'Edit', 'Delete', and 'Manage' buttons.

12. Select "Click to reveal" next to Consumer Secret and record this value to "Consumer Secret" in your installation notes.

13. Click "Manage" at the top of the page

Connected App Name
Amazon Connect Integration

[« Back to List: Custom Apps](#)

[Edit](#) [Delete](#) [Manage](#)


14. On the page that appears, click "Edit Policies"

15. Set "Permitted Users" to "Admin approved users are pre-authorized"

OAuth policies

Permitted Users	Admin approved users are pre-authorized
-----------------	---

16. Click "OK" on the pop-up dialog:

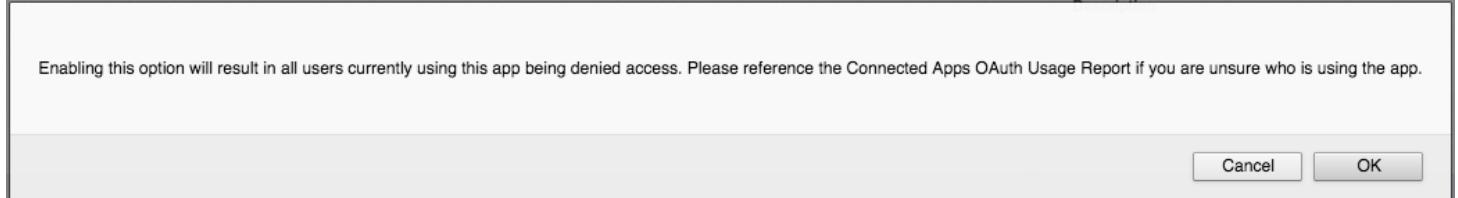

17. Set "IP Relaxation" to "Relax IP restrictions"



18. Click "Save"

Determine your Username, Password and Security Token

The authentication of the Lambda Functions requires valid user credentials. It is a common practice to create an API user account for this purpose.

1. Log in to Salesforce

2. Navigate to Setup > Manage Users > Profiles

3. Click "New Profile"

4. Enter the Profile Name (i.e. "API Only")

5. Select the existing profile to clone (The integration user's access to just those objects required for the integration)

Enter the name of the new profile.

You must select an existing profile to clone from.

Existing Profile	System Administrator
User License	Salesforce
Profile Name	API Only

Save Cancel

NOTE: You're advised to use a full Salesforce License for the user to be able to set the below permissions and have full access to avoid any other errors.

6. Click "Save". A New Profile is created:

Profile
API Only
« Back to List: Profiles

Users with this profile have the permissions and page layouts listed below. Administrators can change a user's profile by editing that user's personal information.

If your organization uses Record Types, use the Edit links in the Record Type Settings section below to make one or more record types available to users with this profile.

[Login IP Ranges](#) | [Enabled Apex Class Access](#) [2] | [Enabled Visualforce Page Access](#) [11] | [Enabled External Data Source Access](#) | [Enabled Named Credential Access](#) | [Enabled Service Presence Status Access](#) | [Enabled Custom Permissions](#)

Profile Detail		Edit Clone Delete View Users		Custom Profile ✓	
Name	API Only	User License	Salesforce		
Description					

7. Once the new profile page opens, select the **System Permissions** button

8. If the Lightning Experience User checkbox is selected, clear it



9. Save the system permissions, then go back to Profile Overview

10. Select the *Password Policies* link, click edit

Password Policies	
User passwords expire in	90 days
Enforce password history	3 passwords remembered
Minimum password length	8
Password complexity requirement	Must mix alpha and numeric characters
Password question requirement	Cannot contain password
Maximum invalid login attempts	10
Lockout effective period	15 minutes
Obscure secret answer for password resets	<input type="checkbox"/>
Require a minimum 1 day password lifetime	<input type="checkbox"/>
Don't immediately expire links in forgot password emails	<input type="checkbox"/>
Edit Clone Delete View Users	

11. Set **User password expire in** to **Never expires** **NOTE:** Failure to do this may lead to production outages.

Password Policies	
User passwords expire in	Never expires
Enforce password history	No passwords remembered
Minimum password length	8
Password complexity requirement	Must mix alpha and numeric characters
Password question requirement	Cannot contain password
Maximum invalid login attempts	10
Lockout effective period	15 minutes
Obscure secret answer for password resets	<input type="checkbox"/>
Require a minimum 1 day password lifetime	<input type="checkbox"/>
Don't immediately expire links in forgot password emails	<input type="checkbox"/> i

12. Select **Save**

13. Navigate to Setup > Manage Apps > Connected Apps

14. Select the app you have created in the previous step (i.e. Amazon Connect Integration)

Connected Apps

Manage access to apps that connect to this Salesforce organization.

App Access Settings

Allow users to install canvas personal apps

Edit

View: All [Create New View](#)

Action	Master Label ↑
Edit	Amazon Connect Integration

15. Click "Manage Profiles"

Profiles

[Manage Profiles](#)

No profiles associated with this app.

16. Ensure the "API Only" profile is selected:

Application Profile Assignment

[« Back to Connected App Detail](#)

Select the appropriate profiles to choose which users have access to this application.

Select	Profiles
<input type="checkbox"/>	Analytics Cloud Integration User
<input type="checkbox"/>	Analytics Cloud Security User
<input checked="" type="checkbox"/>	API Only

17. Click "Save" at the bottom of the page

18. Navigate to Setup > Manage Users > Users

19. Click "New User"

All Users

On this page you can create, view, and manage users.

In addition, download SalesforceA to view and edit user details, reset passwords, and perform other administrative tasks from your mobile devices: [iOS](#) | [Android](#)

View: [All Users](#) [Edit | Create New View](#)

The screenshot shows the top navigation bar of the Salesforce 'All Users' page. It includes a 'View' dropdown set to 'All Users', a 'Search' bar with placeholder text 'Search All Users', and three buttons: 'New User', 'Reset Password(s)', and 'Add Multiple Users'.

20. Set necessary fields: Last Name, Alias, Email, Username, Nickname

New User

The screenshot shows the 'User Edit' page under the 'General Information' tab. The form fields are as follows:

First Name	<input type="text"/>
Last Name	APIUser
Alias	apiuser
Email	<input type="text"/>
Username	apiuser
Nickname	apiuser i
Title	<input type="text"/>
Company	<input type="text"/>
Department	<input type="text"/>
Division	<input type="text"/>

21. On the right-hand side, set the User License and Profile

The screenshot shows the right-hand sidebar of the 'User Edit' page with three dropdown menus:

- Role: <None Specified> [i](#)
- User License: Salesforce [i](#)
- Profile: API Only [i](#)

22. Click "Save"

23. In **Quick Find**, search for "Permission Sets". Select the **AC_Administrator** permission set.



Search Setup

Setup

Home

Object Manager

Q Perm

Users

Permission Set Groups

Permission Sets

Custom Code

Custom Permissions

Didn't find what you're looking for?
Try using Global Search.



SETUP

Permission Sets

Permission Sets

On this page you can create, view, and manage permission sets.

In addition, you can use the Salesforce mobile app to assign permission sets to a user. Download Salesforce from the App Store or Google Play: [iOS](#) | [Android](#)

[All](#) [Edit](#) [Delete](#) [Create New View](#)[New](#)

Permission Set Label ↑

Description

Licenses

Action	AC Administrator	Description	Licenses
<input type="checkbox"/> Action	AC Administrator	Allows the user to configure Amazon Connect setup and provides ...	
<input type="checkbox"/> Clone	AC Agent		
<input type="checkbox"/> Clone	AC CallRecording		
<input type="checkbox"/> Clone	AC Manager		

24. Select **Manage Assignments**. Add the apiuser you just created to the permission set.

25. A confirmation email will be sent, with an activation link. Click the link to activate your user.

Welcome to Salesforce!

Click below to verify your account.

Verify Account

To easily log in later, save this URL:
<https://login.salesforce.com/>

Change (set) a password for apiuser (Considered a strong that contains at least 20 random characters):



Change Your Password

Enter a new password for apiuser@acsfcdryrun.com.

Your password must have at least:

- 8 characters
- 1 letter
- 1 number

* New Password

|

* Confirm New Password

Security Question

▼ In what city were you born?

* Answer

Change Password

Password was last changed on 18/09/2018 17:29.

26. Click "Change Password"

27. Access the apiuser personal settings by selecting the username in the top right corner, then "My Settings".

APIUser ▾

Setup

My Profile

My Settings

Developer Console

Logout

28. Type "Security Token" in the Quick Find box and click "Reset My Security Token".

Reset My Security Token

When you access Salesforce from an IP address that isn't trusted for your company, and you use a desktop client, you must reset your security token.



After you reset your token, you can't use your old token in API applications and desktop clients.

Reset Security Token

29. Your security token will be emailed to you

[Reset My Security Token](#)

Check Your Email



We sent a new security token to the email address for your account.


30. Copy the security token from the email in to your installation notes for the "Access Token" value.

Store Salesforce credentials in AWS Secrets Manager

To ensure that your Salesforce credentials are secure, the Lambdas require that the credentials are stored in AWS Secrets Manager. AWS Secrets Manager is a highly secure service that helps you store and retrieve secrets.

1. In a new browser tab, login to the AWS console

2. Make sure you are in the same region as your Amazon Connect instance. You can set the region by expanding the region selector in the upper right and choosing the region

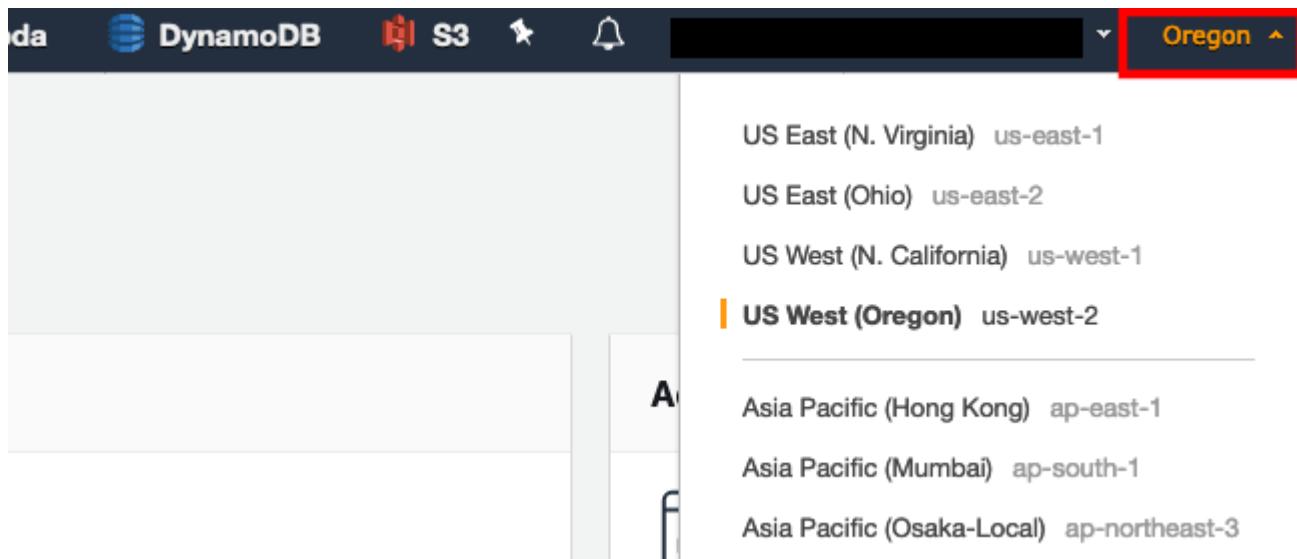

3. Navigate to the [Secrets Manager console](#)

4. Select **Secrets**

5. Select **Store a new secret**

6. Select **Other types of secrets**

7. Make sure **Secret key/value** is selected

8. Enter key value pairs that match the following:

a. **Key:** Password, **Value:** the password for the API user that you configured in the previous section

b. **Key:** ConsumerKey, **Value:** the Consumer Key for the Connected App you created in the previous section

c. **Key:** ConsumerSecret, **Value:** the Consumer Secret for the Connected App you created in the previous section

d. **Key:** AccessToken, **Value:** this is the access token for the API user that you configured in the previous section

9. For the encryption key, click "Add new key"

10. Select **Create Key**

11. Make sure key type is set to **symmetric**

12. Give your key an **alias**, like *SalesforceCredentialsSecretsManagerKey*

13. Click Next

14. Select administrators you want to have access permission to change the key policy. Make sure you are being as restrictive as possible

15. Click Next

16. Select the users and roles you want to have access to the Salesforce credentials in Secrets Manager. Make sure you are being as restrictive as possible

17. Click Next

18. Click Finish

19. Navigate back to the Secrets Manager setup tab

20. Select the key you just created

Specify the key/value pairs to be stored in this secret Info

Secret key/value **Plaintext**

Password	Password	Remove
ConsumerKey	ConsumerKey	Remove
ConsumerSecret	ConsumerSecret	Remove
AccessToken	AccessToken	Remove

+ Add row

Select the encryption key Info

Select the AWS KMS key to use to encrypt your secret information. You can encrypt using the default service encryption key that AWS Secrets Manager creates on your behalf or a customer master key (CMK) that you have stored in AWS KMS.

SalesforceCredentialsSecretsManagerKey

Add new key 

Cancel **Next**

21. Click Next

22. Give your secret a name, like *SalesforceCredentials*

23. Click Next

24. Make sure **Disable automatic rotation** is disabled

25. Click Next

26. Click Store

27. Select the secret you just created, and copy the Secret ARN

The screenshot shows the AWS Secrets Manager interface. At the top, there's a breadcrumb navigation: AWS Secrets Manager > Secrets > SalesforceCredentials. Below the navigation, the title "SalesforceCredentials" is displayed. On the left, a sidebar titled "Secret details" lists the following information:

- Encryption key: SalesforceCredentialsSecretsManagerKey
- Secret name: SalesforceCredentials
- Secret ARN: (This field is highlighted with a red rectangle.)
- Secret description: -

On the right side of the screen, there's a "Actions" button with a dropdown arrow.

28. You should now have all of the information you need to install the package

Install the Amazon Connect Salesforce Lambda package

1. Login into your AWS Account

2. Navigate AWS Serverless Application Repository
(<https://aws.amazon.com/serverless/serverlessrepo/>)



Contact Sales Support English ▾ My Account ▾

Products Solutions Pricing Learn Partner Network AWS Marketplace Explore More



AWS Serverless Application Repository

Home

Publishing Applications

Resources

FAQs and Terms

AWS Serverless Application Repository

Discover, deploy, and publish serverless applications

Browse all applications

3. Click on the Search (magnifying glass) and type in Amazon Connect Salesforce.

The screenshot shows the AWS Serverless Application Repository interface. At the top, there's a dark header with the AWS logo and navigation links like 'Contact Sales', 'Support', 'English ▾', and 'My Account ▾'. Below the header is a search bar containing the text 'amazon connect salesforce'. To the right of the search bar is a small 'X' button for clearing the search term.

4. Select AmazonConnectSalesForceLambdas and click "Deploy"

The screenshot shows the AWS Lambda Functions interface. On the left, there's a sidebar with 'AWS Lambda' and 'Dashboard' under 'Functions'. The main area shows a breadcrumb trail: 'Lambda > Functions > Create function > Review, configure and deploy'. Below the trail, the title 'AmazonConnectSalesForceLambdas — Version' is displayed. A sub-instruction below it says 'Review details and configure parameters below to deploy the application'.

5. Fill in all Salesforce related fields in "Configure application parameters". All values should be available in your installation notes:

Configure application parameters

Application name

The stack name of this application created via AWS CloudFormation

SalesforceAccessToken

The security token of the Salesforce API user account used above.

SalesforceConsumerKey

Your Salesforce consumer key

SalesforceConsumerSecret

Your Salesforce consumer secret is available in Salesforce immediately to the right of your Salesforce Consumer Key

SalesforceHost

Your Salesforce Host

SalesforcePassword

The password of a valid Salesforce API account for your environment. This account must be the same one as entered in the "Salesforce API Configuration Username" parameter above.

SalesforceProduction

True for Production Environment, False for Sandbox

SalesforceUsername

The username of a valid Salesforce API account for your environment. For example, user@domain.com

SalesforceVersion

To find the Salesforce Edition and API Version please visit
<https://help.salesforce.com/articleView?id=000199268&type=1>

[Cancel](#)[Previous](#)[Deploy](#)

6. The Lambda package includes additional features which can be enabled or disabled, based on particular use-case:
- a. *PostcallCTRImportEnabled* -- if set to true, the package will include a feature to import Amazon Connect CTRs into your Salesforce Org. Once enabled, you can decide which CTR records should be imported, by setting a custom attribute (*postcallCTRImportEnabled*) in your Contact Flow. This feature requires you to provide *CTRKinesisARN*.
 - b. *PostcallRecordingImportEnabled* -- if set to true, the package will include a feature to import Amazon Connect Call Recording (wav) files into your Salesforce Org. This feature is not required if you only need a call recording link in your Salesforce Org. Once enabled, you can decide which Call Recordings should be imported, by setting a custom attribute (*postcallRecordingImportEnabled*) in your Contact Flow. This feature requires you to provide: *CTRKinesisARN*, *ConnectRecordingS3BucketName* and *TranscribeOutputS3BucketName*
 - c. *PostcallTranscribeEnabled* -- if set to true, the package will include a feature to transcribe Amazon Connect Call Recordings, using Amazon Transcribe, and provide Speech Analytics, using Amazon Comprehend, then import results into your Salesforce Org. Once enabled, you can decide which Call Recordings should be transcribed and analyzed, by setting custom attributes (*postcallTranscribeEnabled*, *postcallTranscribeLanguage* and *postcallTranscribeComprehendAnalysis*) in your Contact Flow. This feature requires you to provide: *CTRKinesisARN*, *ConnectRecordingS3BucketName* and *TranscribeOutputS3BucketName*
 - d. *RealtimeReportImportEnabled* -- if set to true, the package will include a feature to publish Amazon Connect Queue Metrics into your Salesforce Org. This feature requires you to provide *AmazonConnectInstanceId*
 - e. *HistoricalReportingImportEnabled* -- if set to true, the package will include a feature to import Amazon Connect Queue and Agent Historical Metrics into your Salesforce Org. This feature requires you to provide *ConnectReportingS3BucketName*
 - f. *CTRKinesisARN* -- please set Amazon Kinesis Stream ARN that is attached to your Amazon Connect instance as Contact Trace Records destination. Amazon Kinesis Firehose is not supported. This parameter is mandatory for certain features, please see above.
 - g. *ConnectRecordingS3BucketName* -- this is the S3 bucket where Amazon Connect stores call recordings. This parameter is mandatory for certain features, please see above.
 - h. *ConnectReportingS3BucketName* -- this is the S3 bucket name where Amazon Connect stores schedule reports. This parameter is mandatory for Historical Reporting Import.
 - i. *AmazonConnectInstanceId* -- this parameter is mandatory for Realtime Reporting Import

j. *TranscribeOutputS3BucketName* -- this is the S3 bucket where Amazon Transcribe stores the output. You can use an existing bucket, or create a new one, as the installation process doesn't create one for you. This parameter is mandatory for certain features, please see above.

k. *SalesforceHost*: The full domain for your salesforce org. For example `https://mydevorg-dev-ed.my.salesforce.com`. Please make sure that the host starts with `https`, and that the url ends with `.my.salesforce.com`. This url can be found in `Setup -> My Domain`.

7. Once completed, click "Deploy" function:

The screenshot shows the AWS Lambda console. In the top left, it says 'Lambda > Functions'. Below that, there's a search bar with 'Add filter' and a keyword input field containing 'keyword : aws-serv'. The main area is titled 'Functions (31)' with a refresh icon. It has three columns: 'Function name', 'Description', and 'Runtime'. A single row is visible, representing a function named 'aws-serverless-repository-AmazonConnec-sfInvokeAPI-2R3T34AMGSWS' with a Python 3.6 runtime. The 'Function name' column has a dropdown arrow.

Function name	Description	Runtime
aws-serverless-repository-AmazonConnec-sfInvokeAPI-2R3T34AMGSWS		Python 3.6


8. The package provides a single Lambda function (`sfInvokeAPI`) that supports multiple operations, like lookup, create and update. For the initial validation, sample events are provided within the function. Click on the function name and check the list of files in the editor.

The screenshot shows the AWS Lambda function editor for the 'aws-serverless-repository-AI' function. On the left, there's a sidebar labeled 'Environment' with a triangle icon. The main area shows a file tree with the following structure:
aws-serverless-repository-AI/
 phonenumbers/
 event-create.json
 event-lookup.json
 event-phoneLookup.json
 event-update.json
 README.md

9. To validate a phone number lookup, double-click on `event-phoneLookup.json` file and copy the text in your clipboard.

```
1 {  
2     "Details": {  
3         "Parameters": {  
4             "sf_operation" : "phoneLookup",  
5             "sf_phone": "+441122334455",  
6             "sf_fields": "Id, Name, Email"  
7         }  
8     }  
9 }
```

10. In the top-right corner, click the drop-down arrow next to the "Test" button and select "Configure test events"

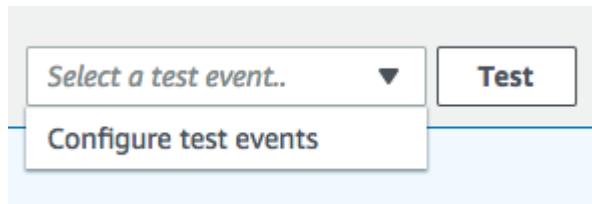

11. Select "Create new test event", set Event name (i.e. phoneLookup) and paste the JSON payload you've copied in the previous step.

Configure test event X

A function can have up to 10 test events. The events are persisted so you can switch to another computer or web browser and test your function with the same events.

Create new test event
 Edit saved test events

Event template

Hello World

Event name

eventLookup

```
1 {  
2     "Details": {  
3         "Parameters": {  
4             "sf_operation": "phoneLookup",  
5             "sf_phone": "+441122334455",  
6             "sf_fields": "Id, Name, Email"  
7         }  
8     }  
9 }
```

12. Click "Create" button

13. From the drop-down list, select your "eventLookup" and click "Test" button



14. If successful, the result will contain fields defined in "sf_fields" parameter in the invocation event

Execution result: succeeded (logs)

▼ Details


The area below shows the result returned by your function execution.

```
{  
    "Id": "0031r000026MVPIAA4",  
    "Name": "Milos Cosic",  
    "Email": "mcosic@amazon.com",  
    "sf_count": 1  
}
```

15. As a next step, we are going to use the ContactId provided and create a Case in Salesforce. Double-click on "event-create.json" file and set the ContactId value from the previous step. Copy the JSON text into your clipboard.

```
1 {  
2     "Details": {  
3         "Parameters": {  
4             "sf_operation" : "create",  
5             "sf_object": "Case",  
6             "Origin": "Phone",  
7             "Status": "New",  
8             "ContactId": "0031r000026MVPIAA4",  
9             "Subject": "Amazon Connect Case",  
.0             "Priority": "Low"  
.1         }  
.2     }  
.3 }
```

16. In the top-right corner, click the drop-down arrow next to the "Test" button and select "Configure test events"

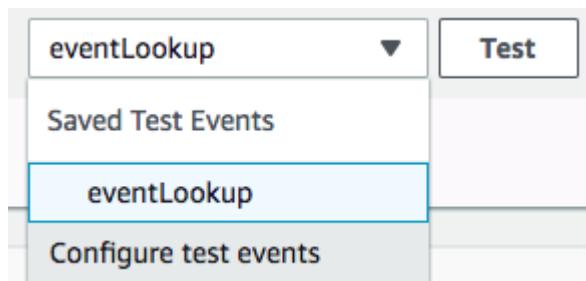

17. Select "Create new test event", set Event name (i.e. createCase) and paste the JSON payload you've copied in the previous step.

Configure test event

X

A function can have up to 10 test events. The events are persisted so you can switch to another computer or web browser and test your function with the same events.

- Create new test event
- Edit saved test events

Saved Test Event

createCase



```
1 - [ {  
2 -   "Details": {  
3 -     "Parameters": {  
4 -       "sf_operation": "create",  
5 -       "sf_object": "Case",  
6 -       "Origin": "Phone",  
7 -       "Status": "New",  
8 -       "ContactId": "0031r000026MVPIAA4",  
9 -       "Subject": "Amazon Connect Case",  
10 -      "Priority": "Low"  
11 -    }  
12 -  }  
13 - }
```

18. Click "Create" button

19. From the drop-down list, select your "createCase" and click "Test" button

createCase



Test

20. If successful, the result will contain a Case Id for newly created case:

Execution result: succeeded ([logs](#))

Details


The area below shows the result returned by your function execution.

```
{  
  "Id": "5001r000023QcAcAAK"  
}
```

21. As defined in the event payload, Status is "New" and Priority is "Low". We are going to use the update operation to close the case. Copy the Case Id provided in the previous step, then double-click on "event-update.json" file and paste the Case Id in "sf_id" parameter:

```
sflInvokeAPI.py x event-phoneLoot x event-create.json x event-update.json x
1 {
2     "Details": {
3         "Parameters": {
4             "sf_operation": "update",
5             "sf_object": "Case",
6             "sf_id": "5001r000023QcAcAAK",
7             "Status": "Closed"
8         }
9     }
10 }
```

22. In the top-right corner, click the drop-down arrow next to the "Test" button and select "Configure test events"

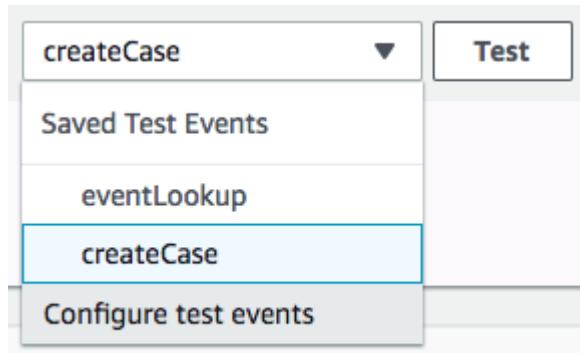

23. Select "Create new test event", set Event name (i.e. closeCase) and paste the JSON payload you've copied in the previous step.

The screenshot shows the 'Configure test event' dialog box. At the top, there are two radio button options: 'Create new test event' (selected) and 'Edit saved test events'. Below this is a dropdown labeled 'Saved Test Event' containing the value 'closeCase'. At the bottom is a large text area displaying the JSON payload:

```
1 - [{}]
2 -     "Details": {
3 -         "Parameters": {
4 -             "sf_operation": "update",
5 -             "sf_object": "Case",
6 -             "sf_id": "5001r000023QcAcAAK",
7 -             "Status": "Closed"
8 -         }
9 -     }
10 }
```

24. Click "Create" button

25. From the drop-down list, select your "closeCase" and click "Test" button

closeCase



Test

26. If successful, the result will be HTTP code 204 ("No Content" success code):

Execution result: succeeded ([logs](#))

▼ Details

The area below shows the result returned by your function execution.

204

27. Login in to Salesforce and search for Case and it's details. The Case status should be "Closed".

Upgrading from an Earlier Version

If you are upgrading from an earlier version of CTI Adapter, there are a few additional things you need to do.

1. Go to the **Setup** section and search for **Object Manager**.

2. In Object Manager section, search for "AC CTI"

LABEL	API NAME	DESCRIPTION	LAST MODIFIED	DEP
AC CTI Adapter	amazonconnect__AC_CtiAdapter__c		8/6/2020	✓
AC CTI Attribute	amazonconnect__AC_CtiAttribute__c		8/6/2020	✓
AC CTI Flow	amazonconnect__AC_CtiScript__c		8/6/2020	✓

3. Open up **AC CTI Adapter**

4. On the left sidebar, click on **Page Layouts**

5. Click on **Page Layout Assignment**

6. On the next page, click on **Edit Assignments**

7. Click on the grey bar at the top of the table to select all rows.



Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

Search Layouts for Salesforce Classic

Triggers

Edit Page Layout Assignment
AC CTI Adapter

The table below shows the page layout assignments for different profiles. Use SHIFT + click or click and drag to select a range of adjacent cells. Use CTRL + click to select multiple cells that are not adjacent. Then choose a new page layout from the drop-down.

Save	Cancel	Page Layout To Use: -- Select Page Layout --	0 Selected	0 Changed
Profiles		Page Layout		
Analytics Cloud Integration User		AC CTI Adapter Layout		
Analytics Cloud Security User		AC CTI Adapter Layout		
Chatter External User		AC CTI Adapter Layout		
Chatter Free User		AC CTI Adapter Layout		
Chatter Moderator User		AC CTI Adapter Layout		
Contract Manager		AC CTI Adapter Layout		
Cross Org Data Proxy User		AC CTI Adapter Layout		
Custom: Marketing Profile		AC CTI Adapter Layout		
Custom: Sales Profile		AC CTI Adapter Layout		
Custom: Support Profile		AC CTI Adapter Layout		
Force.com - App Subscription User		AC CTI Adapter Layout		
Force.com - Free User		AC CTI Adapter Layout		
Gold Partner User		AC CTI Adapter Layout		
Identity User		AC CTI Adapter Layout		
Marketing User		AC CTI Adapter Layout		
Minimum Access - Salesforce		AC CTI Adapter Layout		
Partner App Subscription User		AC CTI Adapter Layout		

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

Edit Page Layout Assignment
AC CTI Adapter

The table below shows the page layout assignments for different profiles. Use SHIFT + click or click and drag to select a range of adjacent cells. Use CTRL + click to select multiple cells that are not adjacent. Then choose a new page layout from the drop-down.

Save	Cancel	Page Layout To Use: -- Select Page Layout --	26 Selected	0 Changed
Profiles		Page Layout		
Analytics Cloud Integration User		AC CTI Adapter Layout		
Analytics Cloud Security User		AC CTI Adapter Layout		
Chatter External User		AC CTI Adapter Layout		
Chatter Free User		AC CTI Adapter Layout		
Chatter Moderator User		AC CTI Adapter Layout		
Contract Manager		AC CTI Adapter Layout		
Cross Org Data Proxy User		AC CTI Adapter Layout		
Custom: Marketing Profile		AC CTI Adapter Layout		
Custom: Sales Profile		AC CTI Adapter Layout		
Custom: Support Profile		AC CTI Adapter Layout		
Force.com - App Subscription User		AC CTI Adapter Layout		
Force.com - Free User		AC CTI Adapter Layout		

8. Open the **Page Layout to Use** dropdown and select **AC CTI Adapter Layout -- August 2020**.

9. Click **Save** and go back to **Page Layouts**.

10. Click on the dropdown next to the item labelled **AC CTI Adapter Layout** and click **Delete**.

11. Confirm **Yes** in the next dialogue where you will be asked "Are you sure?"

12. If you see a screen titled **Deletion Problems**, find and click **Delete**.




Deletion problems

[Back to Previous Page](#)

The attempted delete was invalid for your session. Please refresh your page and try again.

[Delete](#)

13. You will be asked which layout you want to replace it with. Select **AC CTI Adapter Layout -- August 2020** and click **Replace**.

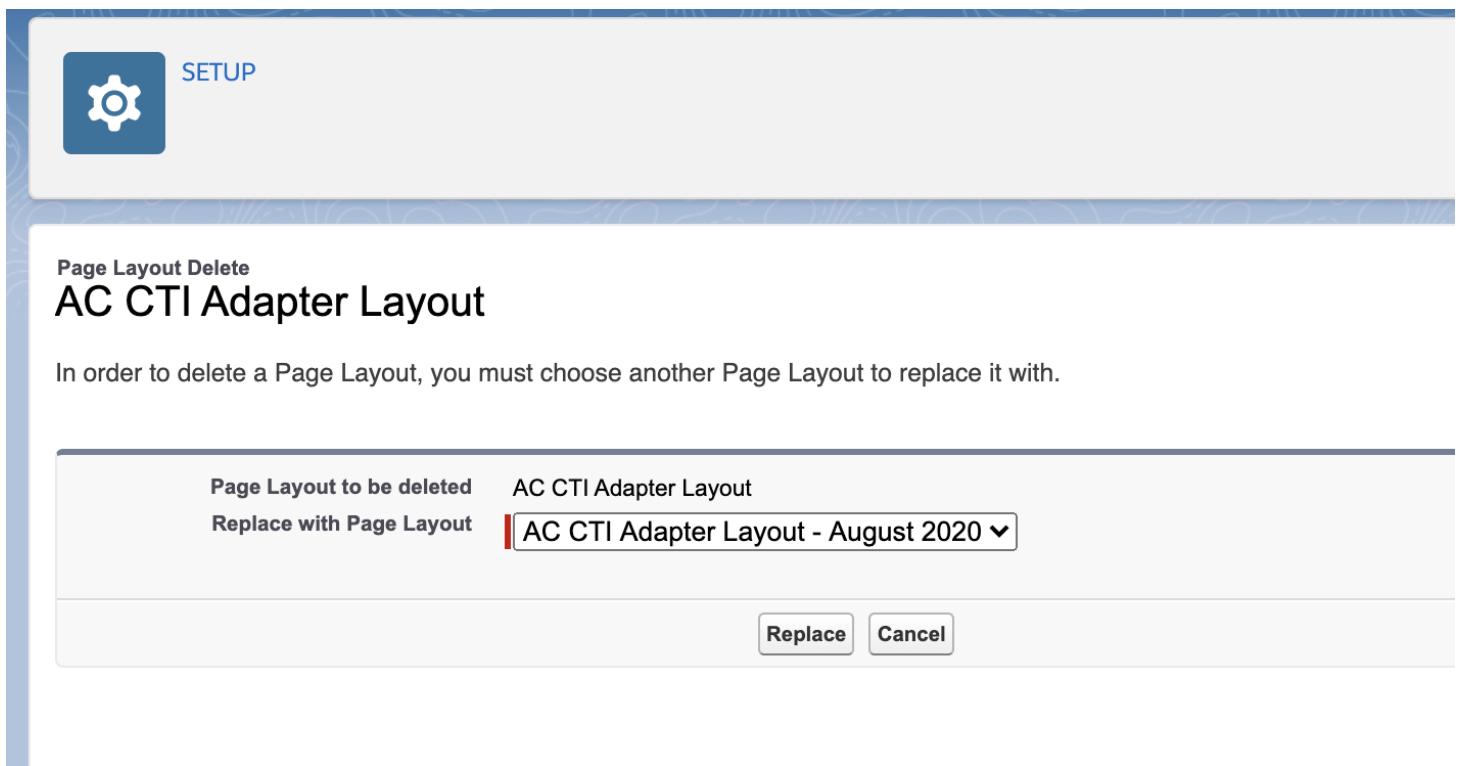

Now we are going to do the same thing for **AC CTI Script Layout**.

1. Open up **AC CTI Script Layout**
2. On the left sidebar, click on **Page Layouts**
3. Click on **Page Layout Assignment**
4. On the next page, click on **Edit Assignments**
5. Click on the grey bar at the top of the table to select all rows.

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

**Edit Page Layout Assignment
AC CTI Flow**

Help for this Page ?

The table below shows the page layout assignments for different profiles. Use SHIFT + click or click and drag to select a range of adjacent cells. Use CTRL + click to select multiple cells that are not adjacent. Then choose a new page layout from the drop-down.

Save Cancel

Page Layout To Use: -- Select Page Layout -- 0 Selected 0 Changed

Profiles

Analytics Cloud Integration User
Analytics Cloud Security User
Chatter External User
Chatter Free User
Chatter Moderator User
Contract Manager
Cross Org Data Proxy User
Custom: Marketing Profile

Page Layout

AC CTI Script Layout
AC CTI Script Layout



Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

**Edit Page Layout Assignment
AC CTI Flow**

Help for this Page ?

The table below shows the page layout assignments for different profiles. Use SHIFT + click or click and drag to select a range of adjacent cells. Use CTRL + click to select multiple cells that are not adjacent. Then choose a new page layout from the drop-down.

Save Cancel

Page Layout To Use: -- Select Page Layout -- 26 Selected 0 Changed

Profiles

Analytics Cloud Integration User
Analytics Cloud Security User
Chatter External User
Chatter Free User
Chatter Moderator User
Contract Manager
Cross Org Data Proxy User
Custom: Marketing Profile

AC CTI Script Layout
AC CTI Script Layout

6. Open the Page Layout to Use dropdown and select AC CTI Flow Layout.

7. Click Save and go back to Page Layouts.

8. Click on the dropdown next to the item labelled AC CTI Script Layout and click Delete.

9. Confirm Yes in the next dialogue where you will be asked "Are you sure?"

10. If you see a screen titled Deletion Problems, find and click Delete.

Deletion problems

[Back to Previous Page](#)

The attempted delete was invalid for your session. Please refresh your page and try again.

[Delete](#)



11. You will be asked which layout you want to replace it with. Select AC CTI Flow Layout and click Replace.



SETUP

Page Layout Delete

AC CTI Script Layout

In order to delete a Page Layout, you must choose another Page Layout to replace it with.

Page Layout to be deleted	AC CTI Script Layout
Replace with Page Layout	AC CTI Flow Layout ▾
Replace Cancel	

12. Go to your **CTI Adapter**.

13. Click on any of the CTI Flows and scroll down to the section labeled **CTI Flow**. You should see something like this:

Invalid Script

Please note that starting from version 4.6, your scripts will need to be migrated to our new CTI Flows.

You can download your current script below



When you are ready to try out the CTI Flow editor, click Continue.

Continue ➔

14. Click **Download** and save your script before clicking **Continue**.


15. Use the CTI Block primitives in the editor to re-create your script as a CTI Flow.

16. Refer to the Sample Flows in the Appendix of this manual.

CTI Adapter Installation Troubleshooting and Common Issues

I upgraded my adapter to v5.10, but I cannot see the CCP Config changes


There is a bug with Salesforce that doesn't update a page layout when you upgrade a package. To fix this, go to Setup and search for `Objects` and click the option under `Create`. Once you're on the Custom Object page, search for the `AC CTI Adapter` object and click on it. Then go into `Page Layouts` and click `Edit` on the layout you are using (Typically `AC CTI Adapter Layout – August 2020`). Then, drag and drop the `Audio Device Settings` and `Page Layout Settings` into the desired spot on the page. Finally hit save.

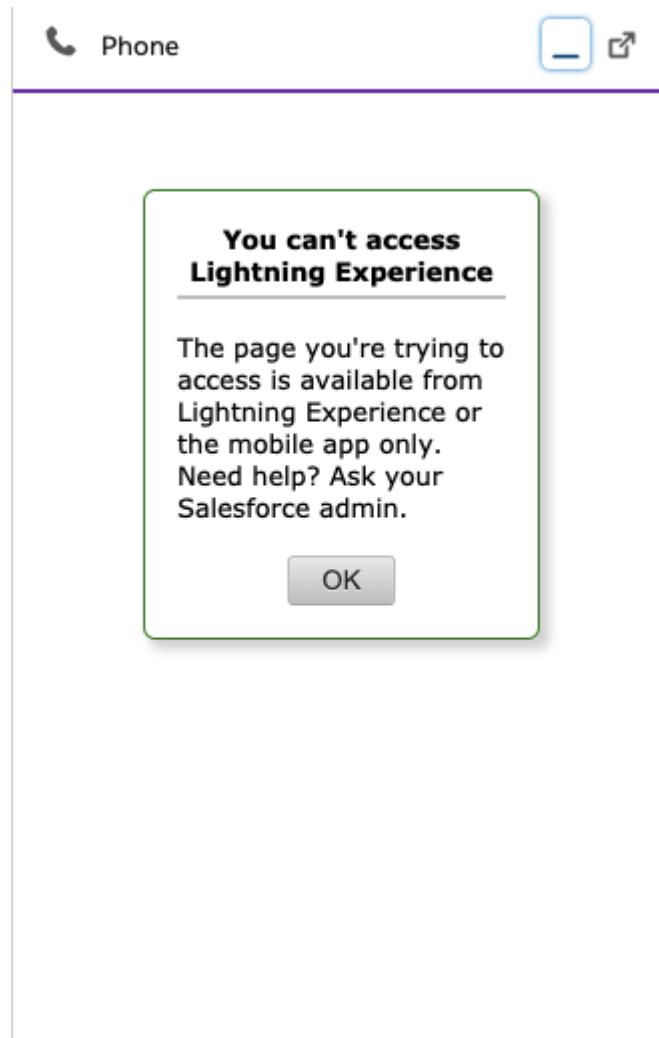

Error “refused to run the JavaScript URL because it violates the following Content Security Policy directive...”

This is an allowlisting issue, please review the installation and ensure that both URLs are properly allowlisted.

Error “refused to frame” Visualforce page

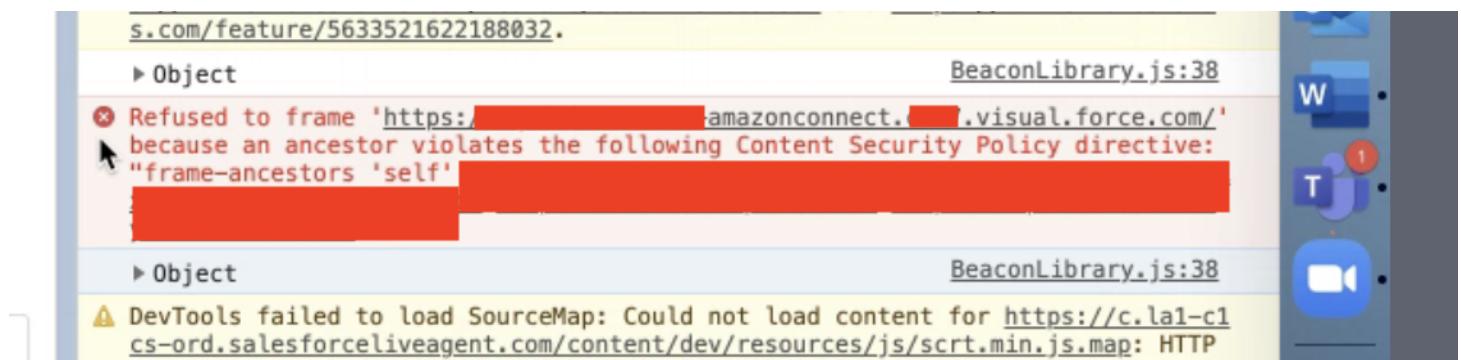

This can happen if the customer has checked “Enable clickjack protection” on Salesforce session settings. The solution is to uncheck that.

The screenshot shows the Salesforce Setup - Session Settings page. The “Clickjack Protection” section contains the following checkboxes:

- Enable clickjack protection for Setup pages
- Enable clickjack protection for non-Setup Salesforce pages
- Enable clickjack protection for customer Visualforce pages with standard headers
- Enable clickjack protection for customer Visualforce pages with headers disabled

A red arrow points to the second checkbox, “Enable clickjack protection for non-Setup Salesforce pages”. A tooltip for this checkbox states: “Protect against clickjack attacks and allow framing on whitelisted external domains”.

I upgraded my adapter to v5, but I don’t see the CTI Flows feature.

See the [Upgrading from an Earlier Version](#) section of the installation guide.

I upgraded my adapter from v3 to v5 and we lost some screenpop functionality.

All screenpop functionality native to v3 now needs to be recreated using CTI Flows. Please review the [CTI Flow Examples](#) for more details, all screenpop functionality from v3 has been recreated.

Certain picklists are missing picklist items.

When upgrading from a version of the package to a higher version of the package in which new picklist items were added to a picklist, those new picklist items won't be installed. This is a [known Salesforce issue](#).

CTI Adapter Configuration

The CTI Adapter installed by the managed package provides a number of features that change or enhance the functionality of the integration. By default, many of these features have been configured during install with a default setting. This section will detail the options available.

AC CTI Adapter Detail		Edit	Delete	Clone
CTI Adapter Name	ACLightningAdapter			
Amazon Connect Instance	https://sfadAPTERtest.awsapps.com/			
Custom Ringtone				
Softphone Popout Enabled	<input checked="" type="checkbox"/>			
Medialess	<input type="checkbox"/>			
Audio Device Settings	<input type="checkbox"/>			
Owner	[REDACTED]			
Amazon Connect Instance Region	us-east-1			
Call Center Definition Name	ACLightningAdapter			
Debug Level	Off			
Presence Sync Enabled	<input checked="" type="checkbox"/>			
Phone Type Settings	<input checked="" type="checkbox"/>			

CTI Adapter Details

- 1. CTI Adapter Name:** provide a unique name for this CTI adapter definition
- 2. Amazon Connect Instance:** This was configured in a previous section. This is the instance url for your Amazon Connect instance.
- 3. Amazon Connect Instance Region:** This is the code for the region that you have deployed your Amazon Connect instance to. This is required for the Amazon Connect chat APIs to work correctly. If you do not use the chat feature of Amazon Connect, this field is not necessary
- 4. Custom Ringtone:** This allows for overriding the built-in ringtone with any browser-supported audio file accessible by the user.
- 5. Call Center Definition Name:** This was configured in a previous section. This is the internal name of the Call Center configured in Salesforce setup. This value links the CTI Adapter to the Call Center, and ultimately to the agents.
- 6. Softphone Popout Enabled:** Salesforce supports softphone pop out in Console and Lightning Experience modes. When the softphone is popped out, it opens in a new browser window external to the Salesforce UI. This is helpful in use cases where the call controls are regularly needed but the agent also needs full access to the entire console.
- 7. Debug Level:** For future use
- 8. Medialess:** Amazon Connect supports running in VDI environments, however best practice is to send the actual audio stream via a separate CCP. Selecting the medialess option will configure the

Salesforce CCP to run in medialess mode, which provides the data that Salesforce needs for screenpop while the audio is streamed to a local CCP.

9. **Presence Sync Enabled:** This setting allows the adapter to use the presence rules to sync state from Amazon Connect to Salesforce Omni-Channel.
10. **Audio Device Settings** Turning this setting on allows the Agent to setup a custom audio device for their speaker, microphone and ringer in the adapter (Speaker and Ringer settings not available on Firefox). You may have to add this field to the layout manually. [See troubleshooting](#).
11. **Phone Type Settings** Turning this setting on allows the Agent to change their Phone Type in the CCP. You may have to add this field to the layout manually. [See troubleshooting](#)

Single Sign On Settings

The Amazon Connect CTI Adapter supports single sign on(SSO) via SAML integration. This allows customers that use a SAML provider for authentication into Amazon Connect. You will need the SSO URL for your provider and the Relay State settings for your Amazon Connect instance.

For general information on configuring SAML for Amazon Connect, please refer to: [Amazon Connect Administrator Guide: Configure SAML for Identity Management in Amazon Connect](#).

If you wish to use **Salesforce** as your identity provider for Single Sign On, please follow the setup instructions in [Appendix B - Configuring Salesforce as Your Identity Provider](#).

For information about configuring specific SAML providers to work with Amazon Connect:

- [AWS Single Sign-On](#)
- [Okta](#)

Once you have your SAML integration working with Amazon Connect, you will need to create the Amazon Connect Single Sign On URL and validate that it works correctly, then configure the Lightning CTI adapter and login the agent.

Identify the SSO URL components

In order to authenticate with Amazon Connect, you need your IdP login URL from your SAML provider and a relay state URL that will redirect the authenticated user to your Amazon Connect instance.

Your IdP Login URL will resemble the following (Salesforce is shown):

<https://mXXXXXXrun-dev-ed.my.salesforce.com/idp/login?app=0sp0N000000Caid>

The 'RelayState' will be in the following format:

[https://console.aws.amazon.com/connect/federate/**InstanceId**?destination=%2Fconnect%2Fccp](https://console.aws.amazon.com/connect/federate/InstanceId?destination=%2Fconnect%2Fccp)


Please note that "console.aws.amazon.com" refers to US-East-1 region (N. Virginia). If your Amazon Connect instance is in a different region, please use the region Console URL. For example:

[https://us-west-2.console.aws.amazon.com/connect/federate/**InstanceId**?destination=%2Fconnect%2Fccp](https://us-west-2.console.aws.amazon.com/connect/federate/InstanceId?destination=%2Fconnect%2Fccp)


Configure the CTI Lightning Adapter in Salesforce

Now we are ready to complete the last step in the configuration process: Adding the SSO settings to the Lightning Adapter. This will configure the adapter to authenticate via SSO and redirect to the Amazon Connect Contact Control Panel once authentication completes.

1. Log in into your Salesforce org and go to the **Service Console**
2. Expand the **navigation menu** by selecting the down arrow and choose **AC CTI Adapters**.

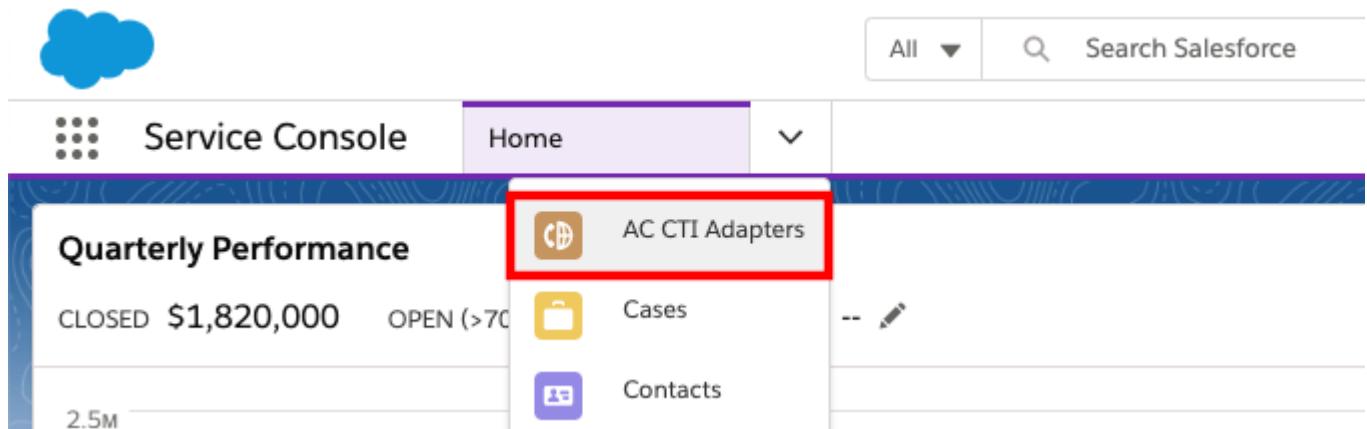

3. Select **ACLightningAdapter**
4. Scroll down to the Single SignOn (SSO) section and choose the pencil icon of either field to edit

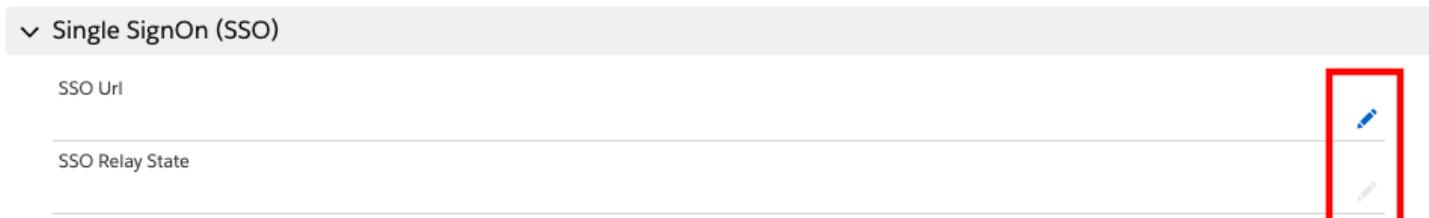

5. For the SSO Url, paste your IdP login URL up to the first question mark (if one exists). A couple of examples are provided:

Salesforce:

<https://mXXXXXXrun-dev-ed.my.salesforce.com/idp/login?app=0sp0N000000Caid>

Microsoft ADFS:

<https://sts.yourcorp.com/adfs/ls/idpinitiatedsignon.aspx>

6. Paste this portion of the URL into the **SSO Url** field

▼ Single SignOn (SSO)

SSO Url

`https://sample-dev-ed.my.salesforce.com/idp/login`

7. For the SSO Relay State:

If you had a question mark in your login URL, paste everything AFTER the question mark into the SSO Relay state field, then add &RelayState= to the end, and append your relay state URL. For example:

`app=0sp0N000000Caid&RelayState=https://console.aws.amazon.com/connect/federate/InstanceId?destination=%2Fconnect%2Fccp`

If you did not have a Question Mark, then enter &RelayState= into the SSO Relay State field and append your relay state URL to it. For example:

`&RelayState=https://console.aws.amazon.com/connect/federate/InstanceId?destination=%2Fconnect%2Fccp`

8. Example of a completed SSO section (Salesforce is shown)

▼ Single SignOn (SSO)

SSO Url

`https://sample-dev-ed.my.salesforce.com/idp/login`


SSO Relay State

`app=0sp6g000000XZyd&RelayState=https://us-west-2.console.aws.amazon.com/connect/federate/YOUR-INSTANCE-ID?destination=%2Fconnect%2Fccp`


9. Choose **Save**

10. **Refresh** your browser to make the changes take effect

a. **NOTE:** If you receive a blocked popup warning, select the warning and change the setting to always allow popups from your Salesforce org, then refresh the browser again

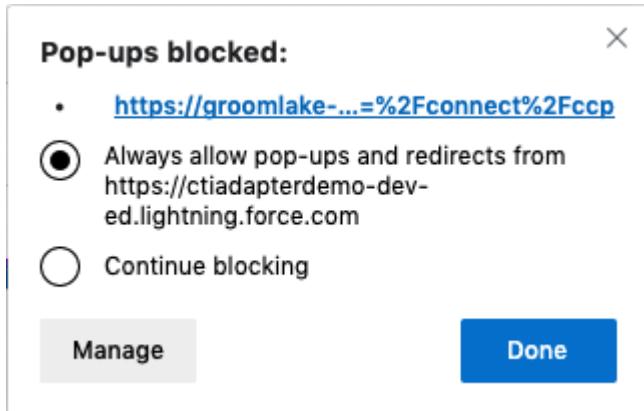

11. After a few seconds, a new window should pop up for a moment. This window is performing the authentication and setting your session cookie. Once it does this, it will close automatically.

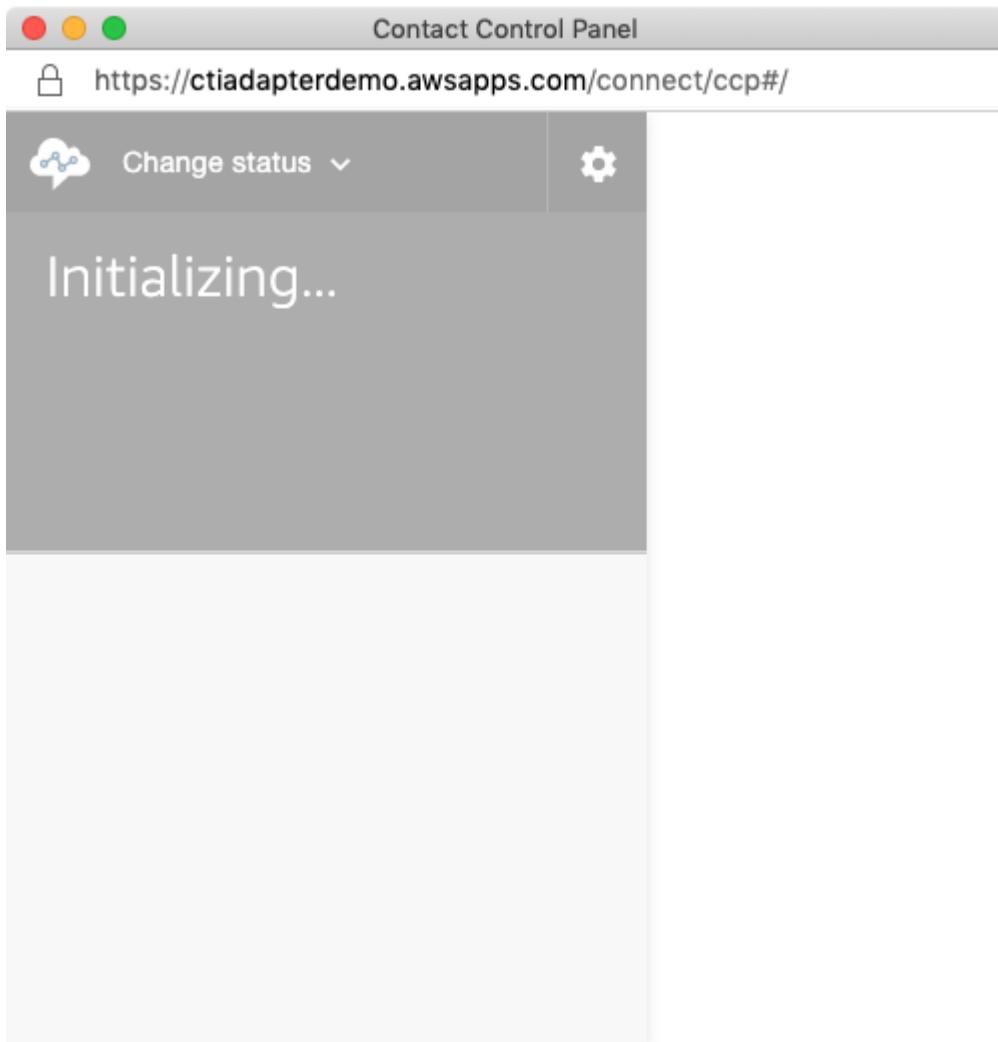

12. Once the authentication window closes, select the **phone icon** in the console toolbar to open the CCP Note: You may also receive popups to allow notifications and microphone access. Please accept both.

13. You should now see the authenticated and logged in CCP

ACLightningAdapter | Sale X Lightning

AdapterTest Burner Accounts -...

https://ctiadapterdemo-dev-ed.l

Service Console AC CTI Adapters

Recently Viewed ▾

1 item • Updated 4 minutes ago

Search this list...

Amazon Connect

Offline

Welcome Jason

Quick connects

Number pad

Amazon Connect History

SSO Configuration is complete

Omnipresence Agent State Sync

Amazon Connect CTI Connector supports the bidirectional synchronization of Amazon Connect agent states with Salesforce omnichannel presence states.

Omnipresence Agent State Sync Enabled true

Enable Omnichannel

In order to sync your Connect User status with your Omni-Channel agent status, you must configure Omni-Channel Presence Syncing. This will make your Omni-Channel presence status match your Amazon Connect Agent Status and vice versa.

First, we must enable omni-channel. To do this, navigate to "Setup" and type "omni" into the Quick Find box, then select "Omni-Channel Settings" from the menu.

 omni

▼ Feature Settings

 ▼ Service

 ▼ Omni-Channel

 ▼ Agent Work

 Agent Work Limits

 Agent Work Triggers

 Agent Work Validatio...

 Limits

 Omni-Channel Settings



 Presence Configurations

 Presence Decline Reaso...

Place a check in the checkbox for "Enable Omni-Channel".



SETUP

Omni-Channel Settings

Omni-Channel Settings

Welcome to Omni-Channel!

Work Limits
Work Triggers
Work Validatio...

nel Settings
onfigurations

ecline Reaso...

atuses

nfigurations

nnels

ices

ience Limits

ience Triggers

ience Valida...

looking for?

Omni-Channel is a comprehensive customer service solution that lets contact centers push work to Omni-Channel. Omni-Channel lets you create work items from your Salesforce records—including cases, chats, leads, objects—and route them to the most qualified, available agents in your organization, all in real time. It integrates seamlessly into the Salesforce console, so it's easy for your support agents to use.

With Omni-Channel, you can manage the priority of work items to make sure that critical assignments get handled quickly. You can manage your agents' capacity and availability for work to ensure that they're given assignments that they can handle. You can also define which agents can work on different types of work items. Omni-Channel routes all of these assignments to the correct agents automatically. Agents no longer have to work items manually from a queue, and managers no longer have to triage or dispatch work to agents based on the most qualified available agent in real time!

Show diagram ▾

First, you need to enable Omni-Channel. Then, [create Service Channels](#).

Enable Omni-Channel This must be checked

Use Skills-Based Routing

Save Cancel

Create Presence Statuses

In this step, we need to add and map Presence Statuses to what is defined in Amazon Connect under Users -> Agent Status.



Manage agent status

Create new agent status, and drag table To maintain integrity of historical metrics

Status name	Description
Available	Available
Wrap Up	Updating
Day Dreaming	Don't Disturb
Break	Taking a Break
Lunch	Going to Lunch
Offline	Offline

Open the Setup in your Salesforce Org and type "presence", then select "Presence Statuses" from the menu. Click the "New" button and add statuses to match what is defined in Amazon Connect.

Presence Statuses

Let agents indicate when they're online and available to receive work items from a

View: [All ▾](#) [Create New View](#)

Action	Status Name	
Edit	Available	
Edit	Break	
Edit	Day Dreaming	
Edit	Lunch	
Edit	Offline	
Edit	Wrap Up	

Each status is flagged as either Online or Busy. For each status that is marked as Online, you will need to specify a service channel to associate the presence status.

Presence Statuses

Let agents indicate when they're online and available to receive work items from a specific service.

Save Cancel

Basic Information

Status Name	Available
Developer Name	Available

▼ Status Options

Choose whether agents are online or busy when they use this status. Online statuses let agents accept work items.

Online
 Busy

▼ Service Channels

Select one or more service channels to assign to this presence status. Agents logged into these channels will see work items assigned to them.

Available Channels	Selected Channels
<div style="border: 1px solid #ccc; padding: 5px; height: 150px;"></div>	<div style="border: 1px solid #ccc; padding: 5px; height: 150px;"><p>Live Agent Outbound Campaign Chan</p></div>
<p>Add </p> <p> Remove</p>	

Save Cancel

Configure Enabled Service Presences Status Access

Next, we need to assign access to these statuses by going to Profiles in Salesforce Setup, and ensure that the agent will be able to access the statuses that map to their Amazon Connect statuses.

In the Salesforce Setup, under Manage Users, select Profiles, then select the user profile to edit. Scroll down the page until you find the section labeled "Enabled Service Presence Status Access".



SETUP

Profiles

[StdExceptionTemplate](#)[Unauthorized](#)[UnderConstruction](#)

Enabled External Data Source Access

[Edit](#)

No External Data Sources enabled

Enabled Named Credential Access

[Edit](#)

No Named Credential enabled



Enabled Service Presence Status Access

[Edit](#)

Service Presence Status Name

[Available](#)[Day_Dreaming](#)

Matches Connect Statuses

[Offline](#)[On Break](#)

Enabled Custom Permissions

[Edit](#)

Click the "Edit" button and on the next page, "Add" presence statuses you want to have enabled for the user.

Enable Service Presence Status Access

The screenshot shows a configuration interface for enabling service presence status access. At the top right are 'Save' and 'Cancel' buttons. The left panel, titled 'Available Service Presence Statuses', contains a single item: '--None--'. The right panel, titled 'Enabled Service Presence Statuses', contains six items: Available, Break, Day Dreaming, Lunch, Offline, and Wrap Up. Between the two panels are 'Add' and 'Remove' buttons with arrows.

Available Service Presence Statuses	Enabled Service Presence Statuses
--None--	Available Break Day Dreaming Lunch Offline Wrap Up

Add Remove

Amazon Connect System Statuses

The following Amazon Connect CCP statuses are system statuses that can be used in presence sync. Please note however that these statuses are restricted and you cannot set the Amazon Connect status to the below.

- Busy - agent is in a call
- Pending - agent is receiving a request for a queue callback
- PendingBusy - agent is receiving call
- CallingCustomer - agent is calling customer
- AfterCallWork - agent is in the after call work screen

Configure Presence Status Synchronization Rules

The Amazon Connect Salesforce CTI Adapter provides a rules-based presence status synchronization system allowing for flexibility in mapping agent states between Amazon Connect and Salesforce Omnichannel.

Presence synchronization actions may be configured based upon manual agent state changes (agent goes on break), system agent state changes (answering a call), omnichannel agent work (agent accepts an email), and omnichannel workload changes (agent completes an email) as examples.

Presence Status Configuration Rules

Presence Sync Rules are evaluated based on specific events. The available events are:

- **Connect Agent State Change:** The Connect agent's state has changed.
- **Salesforce Agent State Change:** The Salesforce agent's state has changed.
- **Salesforce Agent Logout:** The Salesforce agent has logged out.
- **Salesforce Work Accepted:** The Salesforce agent has accepted work.
- **Salesforce Workload Changed:** The Salesforce agent's workload has changed.

Once the event is triggered, the CTI adapter will evaluate the provided criteria. The criteria is established by comparing Operand A, using standard comparator options, against Operand B. Possible options for Operand A and B are:

- **Connect Agent New State:** The Connect agent's new state value
- **Connect Agent Old State:** The Connect agent's old (previous) state value
- **Salesforce Agent New State:** The Salesforce agent's new state value
- **Salesforce Service Channel:** The service channel upon which the Salesforce agent has accepted work
- **Salesforce Previous Workload:** The Salesforce agent's previous workload
- **Salesforce Previous Workload Pct:** The Salesforce agent's previous workload expressed as a percent of configured capacity
- **Salesforce New Workload:** The Salesforce agent's new workload
- **Salesforce New Workload Pct:** The Salesforce agent's new workload expressed as a percent of configured capacity
- **Salesforce Configured Capacity:** The Salesforce agent's configured capacity

- **Static Value:** The user may provide a value. For example, a custom agent state name or other alphanumeric value. When Static Value is selected a "Value" field becomes visible to accept the users static value input.

Available comparators are:

- **Equal to:** Are Operand A and Operand B equal
- **Not equal to:** Are Operand A and Operand B not equal
- **Greater than:** Is Operand A greater than Operand B
- **Greater than or equal to:** Is Operand A greater than or equal to Operand B
- **Less than:** Is Operand A less than Operand B
- **Less than or equal to:** Is Operand A less than or equal to Operand B

The screenshot shows the configuration page for an AC CTI Adapter named 'ACClassicAdapter'. The page includes sections for 'Single SignOn (SSO)', 'Customizations' (with a 'User Defined' section), and 'Presence Sync Rules' (with a red box highlighting the 'New AC Presence Sync Rule' button). Other sections like 'Attributes' and 'CTI Flows' show 'No records to display'.

Section	Setting	Value
AC CTI Adapter Detail	CTI Adapter Name	ACClassicAdapter
	Amazon Connect Instance Alias	testinglogin123
	Custom Ringtone	
	Softphone Popout Enabled	<input checked="" type="checkbox"/>
	Medialess	<input type="checkbox"/>
Edit Delete Clone		
Single SignOn (SSO)		
SSO Url SSO Relay State		
Customizations		
User Defined Created By <u>Bomi Lee</u> , 8/3/2020, 1:19 PM Edit Delete Clone		
Attributes		
No records to display		
CTI Flows		
No records to display		
Presence Sync Rules		
No records to display		

The configuration setting illustrated in the previous example, are described below:

- source -- The triggered event. In this case, an Amazon Connect agent state change is the triggering event
- destination -- The target system on which to execute the action

- criteria -- The values and comparator that will be evaluated to determine whether or not to trigger the action
 - operandA -- The left side of the criteria statement
 - operandB -- The right side of the criteria statement
 - comparator -- The comparison operator used to evaluate the criteria statement
- state -- The target agent state of the destination system

Example rule:

The screenshot shows the 'AC Presence Sync Rule Edit' interface. The rule name is 'Connect agent switches'. The source is 'Connect Agent State Change' with 'Connect Agent New State' selected as Operand A. The comparator is 'Equal to'. The destination is 'Salesforce Agent State' with 'Static Value' selected as Operand B, and 'Lunch' entered as the value. The rule is active.

Information	
Presence Sync Rule Name	Connect agent switches
CTI Adapter	ACClassicAdapter
Source	Connect Agent State Change
Operand A	Connect Agent New State
Operand A Value	
Comparator	Equal to
Active	<input checked="" type="checkbox"/>
<input type="button" value="Save"/> <input type="button" value="Save & New"/> <input type="button" value="Cancel"/>	

Destination	
Destination	Salesforce Agent State
Operand B	Static Value
Operand B Value	Lunch
Value	Lunch
<input type="button" value="Save"/> <input type="button" value="Save & New"/> <input type="button" value="Cancel"/>	

Summary: This rule is triggered when the Connect agent's state is changed (Source). If their state is changed to the static value (Operand B) "Lunch" (Operand B Value), then the Salesforce Agent's state (Destination) is set to Lunch (Value).

Contact Attributes Display

Amazon Connect allows for user defined Contact Attributes to be attached to a phone call within Contact Flows. This can be used to track caller inputs, IVR selections, outcomes of an interaction with Amazon Lex, or data lookup from backend systems through Lambda. Some of those values can be useful to be displayed to the agent to speed up data input or skip processes such as authenticating the customer.

Amazon Connect allows data classifications for contact's attributes. The classification engines scans configured metadata and identifies text and links attributes to display in Attributes and Links sections respectively.

To configure a contact attribute for display within embedded CCP:

In the top navigation bar, select the "+" icon.




Select "AC CTI Adapters"

Create a new adapter. Fill in the CTI Adapter Name, and Amazon Connect Instance Alias. For the Call Center Definition Name, type in ACConsoleAdapter. Select Save.

1. Log in to your Salesforce Org.

2. From the top right corner, select the **Sales** application.

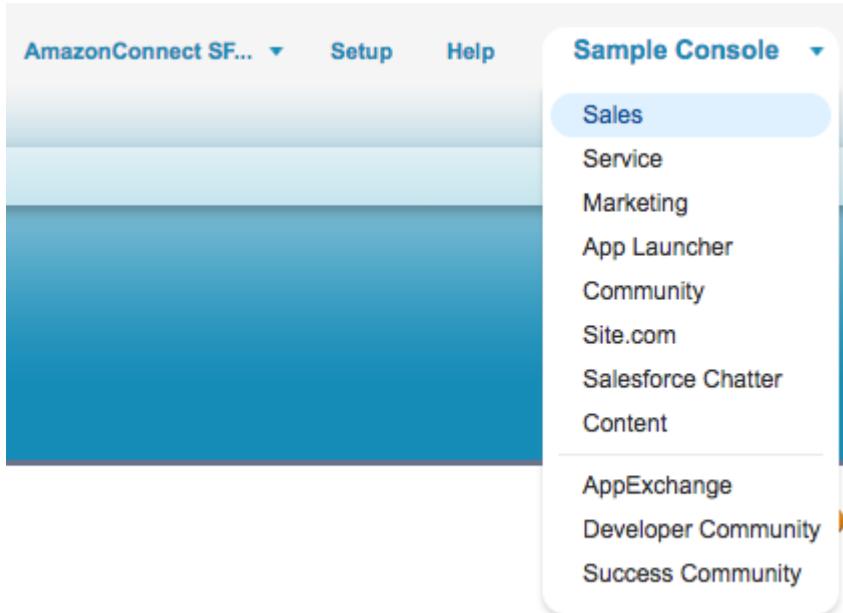

All Tabs

Use the links below to quickly navigate to a tab. Alternatively, you can add a tab to your display to better suit the way you work.

View: All Tabs	
AC Contact Channel Analytics	Documents
AC Contact Trace Records	Duplicate Record Sets
Accounts	Engagement Channel Types
AC CTI Adapters	External Managed Accounts
AC Real Time Queue Metrics	Files
AC Voicemail Drops	Forecasts
Analytics	Groups
App Launcher	Home

3. Select **AC CTI Adapters** and select your adapter

4. Scroll down to the attributes section and select **New AC CTI Attribute**

Attributes	New AC CTI Attribute
No records to display	

5. Provide a **CTI Attribute Name**, for example: authenticated

6. Provide the **Label** name, for example:

7. Select the **Display** option, in this case: Key-Value

8. Select Text as the **Type**

9. For **Style**, enter the following: `color: red`

10. In the **Format** field, enter `{{phone_number}}` to reference the incoming contact attribute

11. Set **Default Value** to `unk`

12. Choose **Save**

The screenshot shows the 'AC CTI Attribute Edit' dialog box. It has tabs for 'Information' and 'Advanced'. The 'Information' tab is selected. The fields are as follows:

Setting	Value
CTI Adapter	ACClassicAdapter
CTI Attribute Name	Authenticated
Label	Is Authenticated?
Type	Text
Format	<code>{{authenticated}}</code>
Default Value	unk
Display	Key-Value
Style	<code>color:red</code>
Active	<input checked="" type="checkbox"/>

At the bottom, there are 'Save', 'Save & New', and 'Cancel' buttons.

13. Open the Amazon Connect Contact Flow Designer and drop Set > Set Contact Attributes block to your Contact Flow. Set the attribute based on your business logic. For example:

Set contact attributes



Stores key / value pairs as contact attributes.

Contact attributes are accessible by other areas of Amazon Connect, such as the Contact Control Panel (CCP) and Contact Trace Records (CTRs).

Attribute to save

The screenshot shows the configuration of the 'Set Contact Attributes' block. The 'Destination key' is set to `authenticated` and the 'Value' is set to `true`. The 'Use text' option is selected.

14. Place and inbound call and ask to speak with an agent. Accept the incoming call and check if Contact Attribute is displayed in the embedded CCP.



Attributes

Is Authenti... bfc5c3b



AC CTI A
ACC

[« Back to List: Call Centers](#)

AC CTI Ada

Amazon C

Softp

Call Center Definition Name

There are additional features that can be used to further customize CTI attributes.



AC CTI Adapter
ACClassicAdapter

[« Back to List: Call Centers](#)

[Attributes \[1\]](#) | [CTI Flows \[0\]](#) | [Presence Sync Rules \[0\]](#) | [Features \[0\]](#)

AC CTI Adapter Detail

[Edit](#) [Delete](#) [Clone](#) [Sharing](#)

Owner

CTI Adapter Name	ACClassicAdapter	Amazon Connect Instance Alias	ac-test-east-1	Amazon Connect Instance Region
Custom Ringtone				Call Center Definition Name
Softphone Popout Enabled	<input checked="" type="checkbox"/>			Debug Level
Medialess	<input type="checkbox"/>			Presence Sync Enabled

1. In the Sales application, navigate to your CTI Adapter

The screenshot shows a table header with 'Features' and a button labeled 'New AC Feature' which is highlighted with a red box.

No records to display

2. Scroll down to the Features section. Select **New AC Feature**.

3. Set the AC Feature Name to **FEATURE_CTI_ATTRIBUTES**

4. Fill the value text box to contain the following settings:

- a. **ShowAttributesIfEmpty** (Boolean, default true): show attributes text box when contact has no attributes
- b. **ShowAllAttributes** (Boolean, default false): show all attributes, including attributes with no value

The screenshot shows the 'AC Feature Edit' screen with the following configuration:

- AC Feature Name:** FEATURE_CTI_ATTRIB
- Value:** ShowAttributesIfEmpty: true
ShowAllAttributes: true
- Active:** checked
- CTI Adapter:** ACClassicAdapter

At the bottom are three buttons: Save, Save & New, and Cancel.


5. Select **Save**

Call Recording Link for Task

The Adapter comes with a Visualforce component that provides users with the ability to download a call recording created within Amazon Connect from a Salesforce page.

Cloudformation Template

To make sure that the AWS resources are set up, make sure that the *PostcallRecordingImportEnabled* parameter is set to true in your Cloudformation stack:

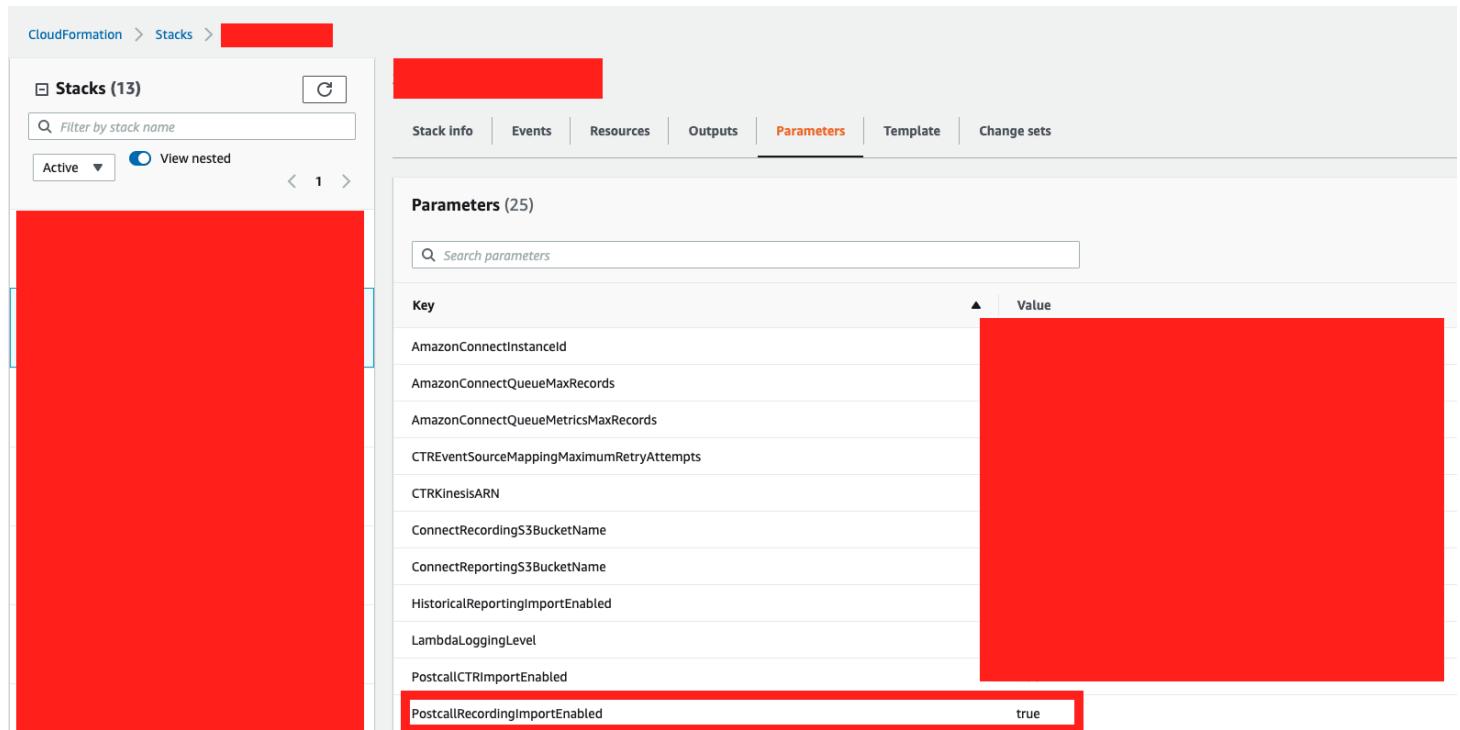

AWS Side Setup

1. See [these steps](#). Follow the sections *Creating key pairs for your signers*, and *Adding a signer to a distribution*. Make sure to record the **public key ID**.
2. Copy and paste the contents of the private key .pem file into a text editor. Replace every newline character with a space, and then delete the last character. This is most easily done using a "find and replace" feature in your text editor. The resulting string of text should resemble the following:

```
-----BEGIN RSA PRIVATE KEY----- (64 character string) (64 character string)  
(64 character string) (64 character string) (64 character string) (64  
character string) (64 character string) (64 character string) (64 character  
string) (64 character string) (64 character string) (64 character string)  
(64 character string) (64 character string) (64 character string) (64 character  
string) (64 character string) (64 character string) (64 character string)  
(64 character string) (64 character string) (under 64 character string) ---  
--END RSA PRIVATE KEY-----
```

3. Navigate to the "Secrets Manager" service. Select the **SalesforceCredentials**.
4. Under the "Secret value" tab, select "Retrieve secret value" and then "Edit".
5. For the **CloudFrontPrivateKey** field, copy and paste the modified contents of the private key .pem file. For the **CloudFrontAccessKeyId** field, copy and paste the **Access Key Id** you recorded above.

Your Secrets Manager Secret should look like the following:

The screenshot shows the AWS Secrets Manager interface. A secret named "SalesforceCredentials" is displayed. The "Secret details" tab shows fields for "Encryption key" (aws/secretsmanager), "Secret name" (SalesforceCredentials), and "Secret ARN" (redacted). The "Secret description" field is empty. The "Actions" button is visible in the top right. Below this is the "Tags" section with an "Edit tags" button.

Secret value Info
Retrieve and view the secret value.

Secret key/value | **Plaintext**

```
{  
    "CloudFrontPrivateKey": "-----BEGIN RSA PRIVATE KEY-----  
    [REDACTED]  
    -----END RSA PRIVATE KEY-----",  
    "CloudFrontAccessKeyId": [REDACTED],  
}
```

The "Secret value" section contains a JSON object with two entries: "CloudFrontPrivateKey" and "CloudFrontAccessKeyId". The "CloudFrontPrivateKey" value is a long string of characters representing an RSA private key, starting with "-----BEGIN RSA PRIVATE KEY-----" and ending with "-----END RSA PRIVATE KEY-----". The "CloudFrontAccessKeyId" value is also redacted.

Please note that your secret may also be formatted stored as a "Secret key/value" secret rather than a "Plaintext" secret; both secret types are valid.

6. Navigate to your Salesforce instance. Navigate to setup, then search for "Visualforce pages."

The screenshot shows the Salesforce Setup interface under "Visualforce Pages". A search bar at the top left shows "visualfor". The main area displays a "Visualforce Page" titled "AC_RecordingViewer". The "Page Detail" section includes a "Label" field set to "AC_RecordingViewer" and a "Namespace Prefix" field. Action buttons for "Edit", "Delete", "Clone", "Where is this used?", "Show Dependencies", and "Preview" are visible. To the left, a sidebar shows "Custom Code" and "Visualforce Components" sections, with "Visualforce Pages" selected. A message at the bottom left says "Didn't find what you're looking for? Try using Global Search."

7. Select the **ACSFCCP_CallRecordingTask** visualforce page, and select "preview." Copy the url of the opened page up until `.com`. Make sure not to include any characters after `.com`.

8. Navigate back to aws, to the s3 bucket where your audio recording files are stored. This s3 bucket should be the same bucket as the **ConnectRecordingS3BucketName** parameter to the serverless application.

9. In the bucket details, select the **Permissions** tab and then the **CORS configuration** tab and paste the following. Replace the AllowedOrigin with the url copied in step 9.

```
[  
{
```

```

    "AllowedHeaders": ["Access-Control-Allow-Origin"],
    "AllowedMethods": ["GET"],
    "AllowedOrigins": ["{url copied in step 9}"],
    "ExposeHeaders": []
}
]

```

Cross-origin resource sharing (CORS)

The CORS configuration, written in JSON, defines a way for client web applications that are loaded in one domain to interact with resources in a different domain. [Learn more](#)

[Edit](#) [Copy](#)

```
[  
  {  
    "AllowedHeaders": [  
      "Access-Control-Allow-Origin"  
    ],  
    "AllowedMethods": [  
      "GET"  
    ],  
    "AllowedOrigins": [  
      "https://[REDACTED]--amazonconnect.visualforce.com"  
    ],  
    "ExposeHeaders": []  
  }  
]
```

10. Select Save

11. Navigate to the "IAM" aws service. Select **Add User**.

Identity and Access Management (IAM)

[Add user](#) [Delete user](#)

Find users by username or access key

User name ▾

[REDACTED]

sfInvokeGenerateAudioRecordingStreamingURLIAMUser

[REDACTED]

Dashboard

▼ **Access management**

- Groups
- Users**
- Roles
- Policies
- Identity providers

12. Give your IAM user a name, like **sfInvokeGenerateAudioRecordingStreamingURLIAMUser**. For the "AWS Access Type", select **Programmatic access**.

Summary

User ARN [REDACTED]

Path /

Creation time 2020-08-21 16:37 EDT

Permissions **Groups** **Tags** **Security credentials** **Access Advisor**

Sign-in credentials

Summary	• User does not have console management access
Console password	Disabled Manage
Assigned MFA device	Not assigned Manage
Signing certificates	None

Access keys

Use access keys to make secure REST or HTTP Query protocol requests to AWS service APIs. For your protection, you should never share your secret keys with anyone. As a best practice, rotate your access keys regularly.

Create access key

Access key ID	Created	Last used
[REDACTED]		

13. Select Next, then select "Attach existing policies directly." Search for

invokeSfGenerateAudioRecordingStreamingURLPolicy and select it.

14. Create the user, then copy down the **Access key ID** and the **Secret access key**. These keys will be used in the next section.

Add user

1 2 3 4 5



Success

You successfully created the users shown below. You can view and download user security credentials. You can also email users instructions for signing in to the AWS Management Console. This is the last time these credentials will be available to download. However, you can create new credentials at any time.

Users with AWS Management Console access can sign-in at: <https://bomilee.signin.aws.amazon.com/console>

Download .csv

	User	Access key ID	Secret access key
▶	sflInvokeGenerateAudioRecordingStreamingURLIAMUser	[REDACTED]	***** Show

15. Navigate to the "Lambda" aws service. Search for term "sfgenerate" and copy down the full name of the sfGenerateAudioRecordingStreaming lambda. This will be used in the next section.

Functions (16)

Filter by tags and attributes or search by keyword 1 match

"sfgenerate" X Clear filters

Function name

-sfGenerateAudioRecordingStreaming-

16. Navigate back to the "Lambda" aws service main page and navigate to the **us-east-1 region**. Select **create function**.

AWS Services ▾ Lambda > Functions Functions (30) Actions Create function

17. Enter a function name, like **sfSig4RequestToS3**.

18. Select **change default execution role**, and **use an existing role**. Search for and select **sfSig4RequestToS3Role**.

Function name
Enter a name that describes the purpose of your function.
sflambdas-sfSig4RequestToS3

Use only letters, numbers, hyphens, or underscores with no spaces.

Runtime Info
Choose the language to use to write your function.
Node.js 12.x

Permissions Info
By default, Lambda will create an execution role with permissions to upload logs to Amazon CloudWatch Logs. You can customize this default role later when adding triggers.

▼ Change default execution role

Execution role
Choose a role that defines the permissions of your function. To create a custom role, go to the [IAM console](#).

- Create a new role with basic Lambda permissions
- Use an existing role
- Create a new role from AWS policy templates

Existing role
Choose an existing role that you've created to be used with this Lambda function. The role must have permission to upload logs to Amazon CloudWatch Logs.
-sfSig4RequestToS3Role-

19. Select **create function**. On the next screen, copy and paste the contents from [this file](#) into the function body, and then select **Deploy**.

20. Select the actions dropdown, and then select **Deploy to Lambda@Edge**.

21. Select the Cloudfront Distribution that was created by the Salesfore Lambdas serverless application, then check off the "I acknowledge..." check box, then select deploy.

Deploy to Lambda@Edge

Configure CloudFront trigger

Distribution
The CloudFront distribution that will send events to your Lambda function.
 X

Cache behavior
Choose the cache behavior you would like this Lambda function to be associated with.
 ▼

CloudFront event
Choose one CloudFront event to listen for.
 ▼

Include body
Select "Include body" if you want to read the request body for viewer request or origin request events.
[Learn more](#).

Confirm deploy to Lambda@Edge

I acknowledge that on deploy a new version of this function will be published with the above trigger and replicated across all available AWS regions.

Lambda will add the necessary permissions for Amazon CloudFront to invoke your Lambda function from this trigger.
[Learn more](#) about the Lambda permissions model.

Cancel Deploy

Salesforce Side Setup

1. In Salesforce Setup, search for "Named Credentials." Select **New Named Credential**.
2. For the **Name** and **Label**, enter AwsGenerateAudioRecordingURL.
3. In the **URL** section, enter `https://lambda.{awsRegion}.amazonaws.com/2015-03-31/functions/{lambdaFunctionName}/invocations/` -- replace {awsRegion} with the awsRegion your serverless application resides in (for example, us-east-1), and replace {lambdaFunctionName} with the full name of the sfGenerateAudioRecordingStreaming lambda you recorded in the previous section.
4. For **Identity Type** select **Named Principal**. For the **Authentication Protocol**, select **AWS Signature Version 4**. Fill in the **Access key ID** you recorded in the previous section as "AWS Access Key ID",


the **Secret access key** as the "AWS Secret Access Key", the AWS Region, and "lambda" as the "AWS Service."

The screenshot shows the Amazon Connect Setup interface. The top navigation bar includes 'Setup', 'Home', 'Object Manager', and a search bar. On the left, a sidebar has 'named credentials' selected under 'Named Credentials'. A message says 'Didn't find what you're looking for? Try using Global Search.' The main content area is titled 'SETUP Named Credentials' and shows a table with one row. The row is highlighted with a red border and contains the following columns: 'Edit | Del' (with 'Edit' underlined), 'AwsGenerateAudioRecordingURL', and a URL 'https://lambda.{awsRegion}.amazonaws.com/2015-03-31/functions/{lambdaFunctionName}/invocations/'. There is also a 'New Named Credential' button at the top right of the table.

5. Select **save**.

Enabling call recording streaming

1. Login to your Amazon Connect instance as an Administrator
2. From the left navigation, choose **Routing** then select **Contact flows**

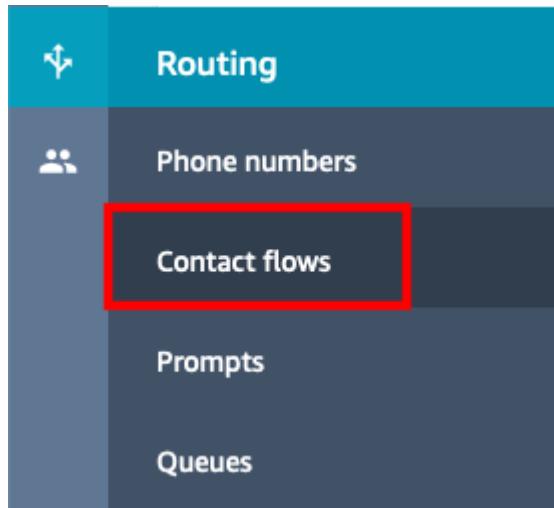

3. Open the contact flow that you want to use to enable call recording import. This contact flow must have Amazon Connect's native recording turned on.
4. In your contact flow, before you transfer to queue, add a new **Set contact attributes** block
5. Configure the block to set a contact attribute as follows:
 - a. **Destination key:** postcallRecordingImportEnabled
 - b. **Value:** true

Attribute to save

Use text X

Destination key
postcallRecordingImportEnabled

Value
true

Use attribute

6. **Save** the Set contact attributes block. Make sure it is appropriately connected to your contact flow, and **Publish** the flow.

7. Wait approximately 2 minutes to give the contact flow time to publish.

To edit the sample Task Page Layout, please follow the steps:

1. Log in to your Salesforce Org
2. Navigate to **Setup** then in type *Object Manager* in Quick Find

Edit Service Console App Navigation Items

Personalize your nav bar for this app. Reorder items, and rename or remove items you've added.

[Learn More](#) i

i 1 item added to your list. Save your updates.

NAVIGATION ITEMS (11)

[Add More Items](#)


<small>≡</small>	 AC CTI Adapters	<small>X</small>
<small>≡</small>	 AC Queue Metrics	<small>X</small>
<small>≡</small>	 AC Real Time Queue Metrics	<small>X</small>
<small>≡</small>	 Cases	
<small>≡</small>	 Contacts	
<small>≡</small>	 Accounts	
<small>≡</small>	 Reports	
<small>≡</small>	 Dashboards	
<small>≡</small>	 Chatter	
<small>≡</small>	 Home	
<small>≡</small>	 AC Contact Channel Analytics	<small>X</small>

[Reset Navigation to Default](#) i

[Cancel](#)

[Save](#)

3. Click on the "Task" object

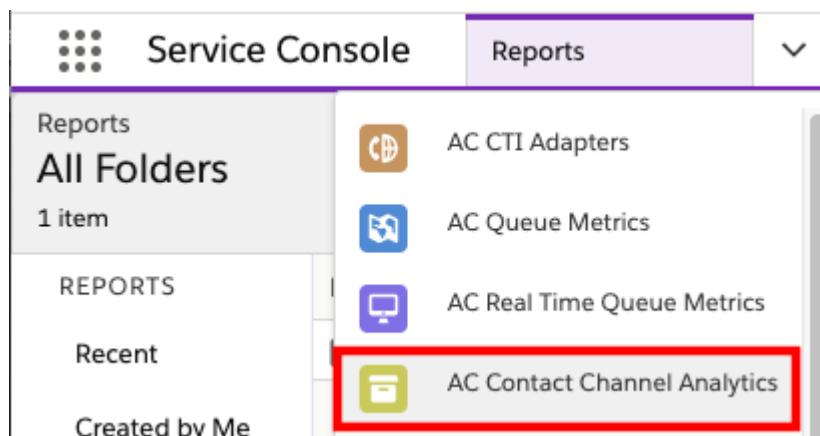

The screenshot shows the Service Console navigation bar. The main menu bar includes 'Service Console', 'Reports' (which is currently selected), and a dropdown arrow. Below the menu, there's a sidebar with categories: 'Reports', 'All Folders' (containing '1 item'), 'REPORTS', 'Recent', and 'Created by Me'. On the right side, a list of items is displayed with icons: 'AC CTI Adapters' (CTI Adapter icon), 'AC Queue Metrics' (Queue Metrics icon), 'AC Real Time Queue Metrics' (Real Time Queue Metrics icon), and 'AC Contact Channel Analytics' (Contact Channel Analytics icon). The 'AC Contact Channel Analytics' item is highlighted with a red rectangular box.


4. Click on the "Page Layouts"

 AC Contact Channel Analytics
Recently Viewed ▾ 

0 items LIST VIEWS

All Recently Viewed (Pinned list)

5. Click on the "Task Layout" and the layout designer will open

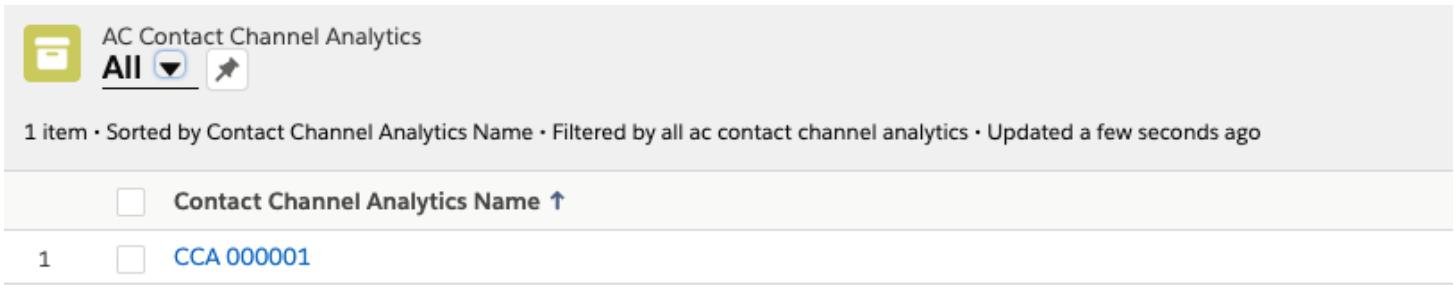


AC Contact Channel Analytics
All  

1 item • Sorted by Contact Channel Analytics Name • Filtered by all ac contact channel analytics • Updated a few seconds ago

	Contact Channel Analytics Name ↑
1	<input type="checkbox"/> CCA 000001

6. Drag the "ACSFCCP_CallRecording" item to the desired area of the layout to have that information appear on the agent's screen. The following screenshot shows how the Call Details section could appear when placing the "ACSFCCP_CallRecording" item on the required Task layout.

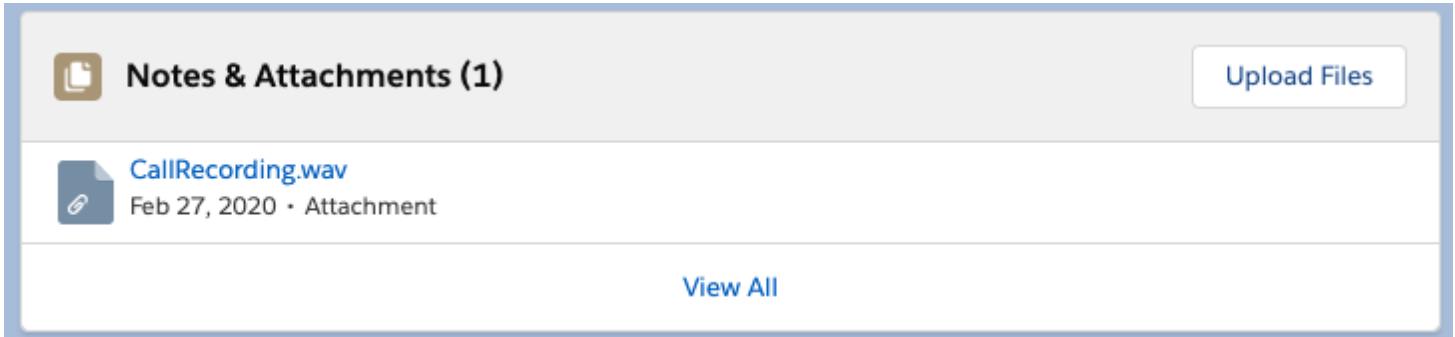

Notes & Attachments (1) 

 CallRecording.wav
Feb 27, 2020 • Attachment

[View All](#)

7. To have access to the recording, the user must have an active session with Amazon Connect. This can be achieved by either logging in to the CCP softphone, or by logging in to Amazon Connect outside of Salesforce. After the session is established, a page refresh should make the player appear.

Common Audio Streaming Setup Issues

1. Verify that the Secrets Manager secret contains both the `CloudFrontPrivateKey` and `CloudFrontAccessKeyId` items.
2. Verify that your Cloudfront distribution's behavior is set to use `Trusted Key Groups`, and that the correct Key Group is selected.

Restrict Viewer Access Yes No

Trusted Key Groups or Trusted Signer Trusted Key Groups Trusted Signer

Trusted Key Groups	No key groups available	Add	Create a new key group			
<table border="1"> <tr> <th>Trusted Key Group Name</th> </tr> <tr> <td>keyGroup1</td> <td>X</td> </tr> </table>				Trusted Key Group Name	keyGroup1	X
Trusted Key Group Name						
keyGroup1	X					

3. Verify that your Cloudfront distribution's behavior contains the sfSig4RequestToS3 edge lambda

Edge Function Associations

Edge Function	CloudFront Event	Function ARN/Name	Include Body
Lambda@Edge	Origin Request	arn:aws:lambda:us-east-1:██████████	<input type="checkbox"/> X

4. Verify that your S3 bucket CORS configuration is correct

Cross-origin resource sharing (CORS)

The CORS configuration, written in JSON, defines a way for client web applications that are loaded in one domain to interact with resources in a different domain. [Learn more](#)

```
[  
  {  
    "AllowedHeaders": [  
      "Access-Control-Allow-Origin"  
    ],  
    "AllowedMethods": [  
      "GET"  
    ],  
    "AllowedOrigins": [  
      "https://██████████--amazonconnect.visualforce.com"  
    ],  
    "ExposeHeaders": []  
  }  
]
```

[Edit](#) [Copy](#)

5. Verify that your named credentials are correctly set up


6. Verify that your user is added to the AC_CallRecording permission set

Call Display on the Account Page

The Adapter comes with a Visualforce Page that displays all phone calls made using Amazon Connect for an Account. It differs from the standard Activity Related List because it filters all other activities out and focuses on the phone calls only.

To show the recent calls on the Account details page, add the "ACSFCCP_CallLogging_View" Visualforce Page to the Account Page layout. It is recommended to create a dedicated section with a 1-Column layout for this purpose, and to make the Visualforce Page scrollable.

1. Log in to your Salesforce Org
2. Navigate to **Setup** then in type *Object Manager* in Quick Find

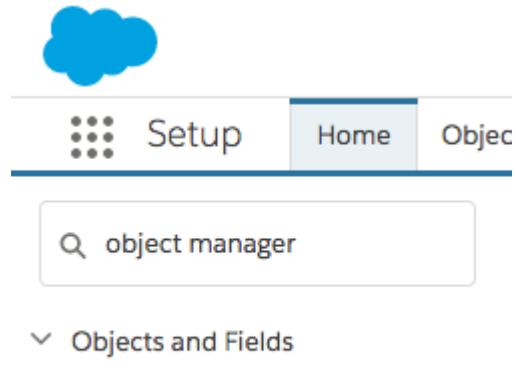

3. Click on the "Account" object

Object Manager		
LABEL	API NAME	DESCRIPTION
Account	Account	

4. Click on the "Page Layouts"

Account

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Object Limits

Record Types

Page Layouts

4 Items, Sorted by Page Layout Name

PAGE LAYOUT NAME

Account (Marketing) Layout

Account (Sales) Layout

Account (Support) Layout

Account Layout

5. Click on the "Account layout" and the layout designer will open

Field	Value	Field	Value	Field	Value	Field	Value	Field	Value
Account Owner		Annual Revenue		Customer Priority		D-U-N-S Number		Last Modified By	
Account Site		Billing Address		D&B Company		Employees		NAICS Code	
Account Name		Account Source		Clean Status		Data.com Key		NAICS Description	
Account Number		Active		Created By		Description		Industry	
								Number of Locations	
								Rating	

6. From the left-hand side menu, select "Fields"

Field	Type	Value
Section	Section	Account Owner, Annual Revenue, Customer Priority, D-U-N-S Number, Last Modified By, Ownership
Blank Space	Blank Space	Account Site, Billing Address, D&B Company, Employees, NAICS Code, Parent Ac
Account Name	Text	Account Name, Account Source, Clean Status, Data.com Key, Fax, NAICS Description, Phone
Account Number	Text	Account Number, Active, Created By, Description, Industry, Number of Locations, Rating

6. Drag and Drop "Section" item to add a new section on the layout

Save | Quick Save | Preview As... | Cancel | Undo | Redo | Layout Properties

Fields

- Buttons
- Custom Links
- Quick Actions
- Mobile & Lightning Actions
- Expanded Lookups
- Related Lists
- Report Charts

Quick Find Field Name

Section	Account Owner	Annual Rev
Blank Space	Section	Billing Add
Account Name	Account Source	Clean Status
Account Number	Active	Created By

Save | Quick Save | Preview As... | Cancel | Undo | Redo | Layout Properties

Fields

- Buttons
- Custom Links
- Quick Actions
- Mobile & Lightning Actions
- Expanded Lookups
- Related Lists
- Report Charts

Quick Find Field Name

Section	Account Owner	Annual Revenue	Customer Priority	D-U-N-S Number	Last Modified By	Ownership
Blank Space	Account Site	Billing Address	D&B Company	Employees	NAICS Code	Parent Ac
Account Name	Account Source	Clean Status	Data.com Key	Fax	NAICS Description	Phone
Account Number	Active	Created By	Description	Industry	Number of Locations	Rating

Customer Priority	Sample Text	SLA	Sample Text
SLA Expiration Date	20/09/2018	SLA Serial Number	Sample Text
Number of Locations	518	Upsell Opportunity	Sample Text
Active	Sample Text		

System Information (Header visible on edit only)

Created By Sample Text Last Modified By Sample Text

Description Information (Header visible on edit only)

Description Sample Text

Custom Links (Header not visible)

Billing

Section

Mobile Cards (Salesforce mobile only)

8. On the pop-up form, set Section Name ("Call Logging View") and 1-Column Layout

Section Properties

Section Name Call Logging View

Display Section Header On Detail Page Edit Page

Layout

1-Column 2-Column

OK Cancel

9. Click "OK"

■ Description Information (Header visible on edit only)


Description Sample Text

■ Custom Links (Header not visible)


Billing


■ Call Logging View

10. From the left-hand side menu, select Visualforce Pages:

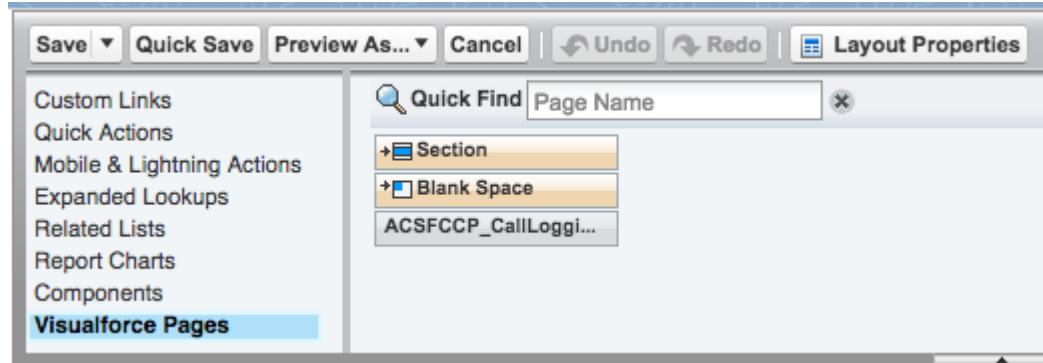


11. Drag and drop "ACSFCCP_CallLogging_View" item to the "Call Logging View" section

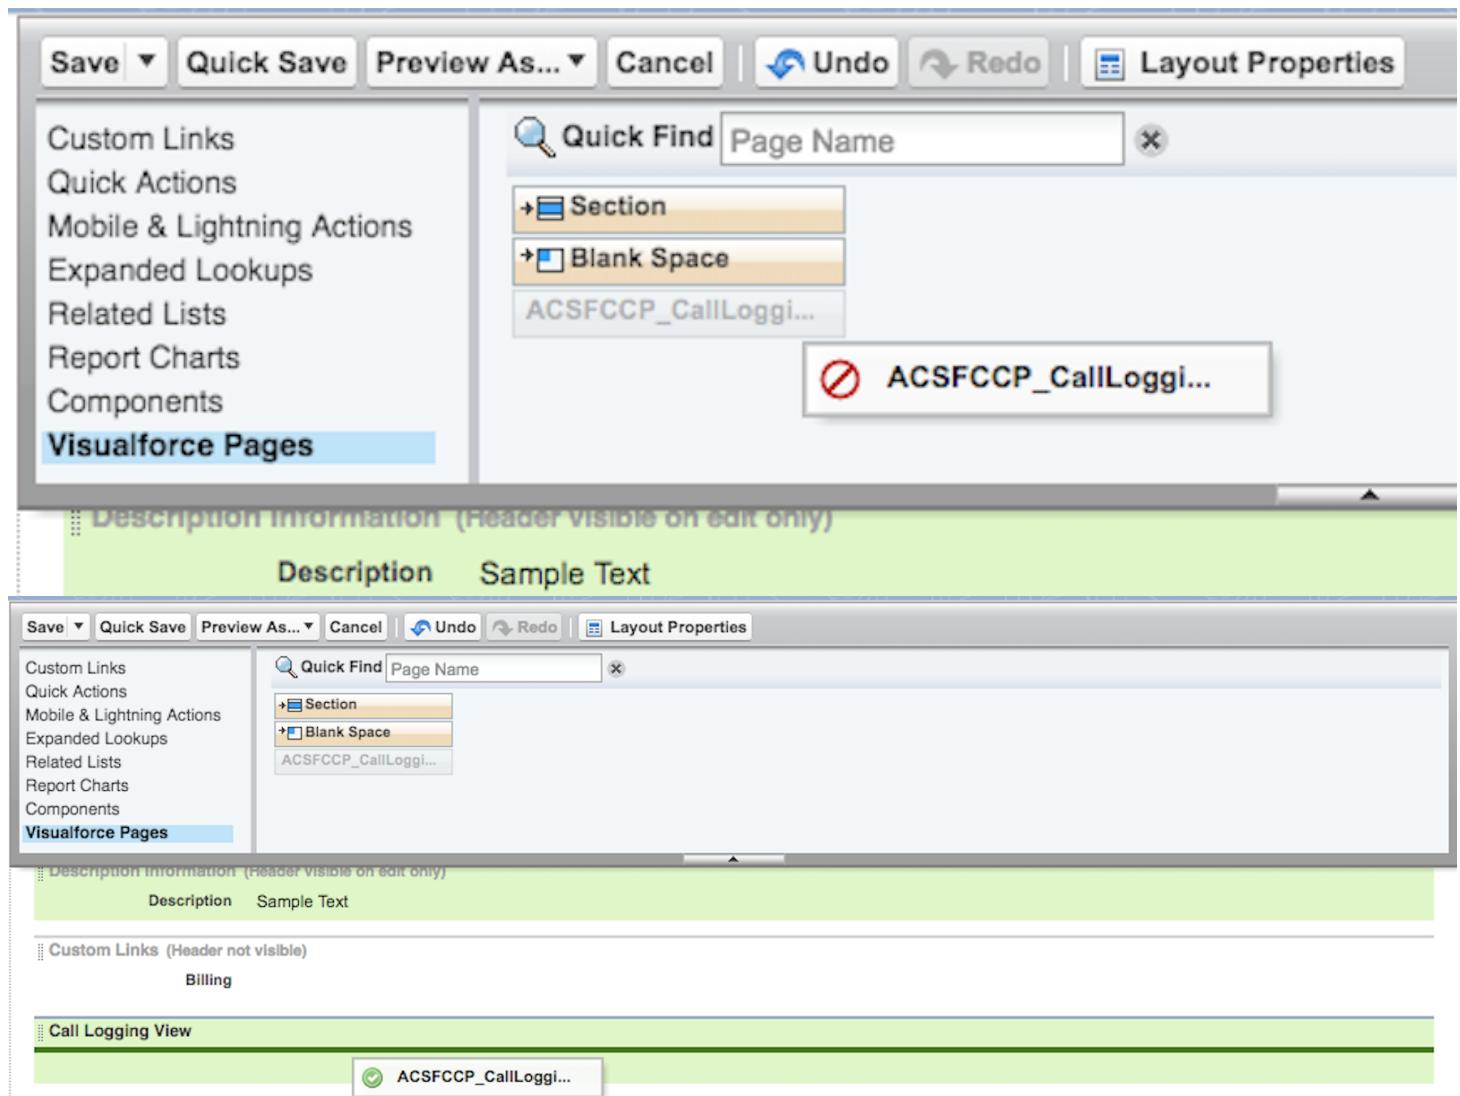

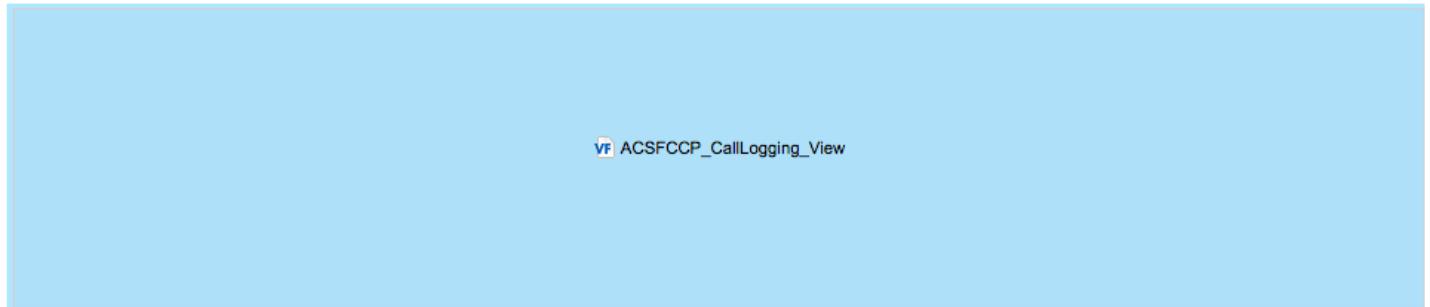


VF ACSFCCP_CallLogging_View


12. Hover the newly added component and click on the "Setting" icon

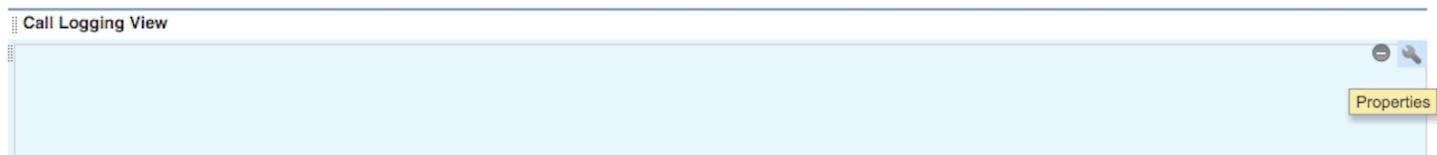

Check "Show scrollbars" and click "OK"

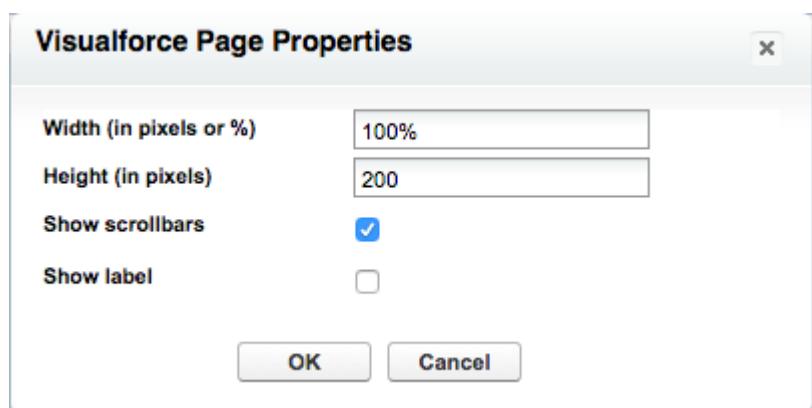

13. Click the "Save" button in the top-left corner

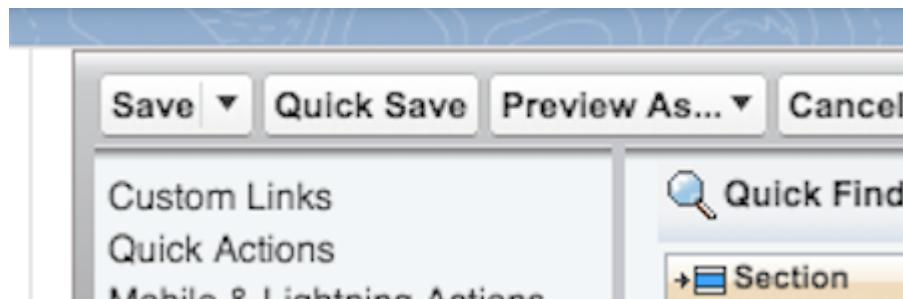

14. Make some phone calls, ask to speak with an agent. Open the Account, then select "Details" tab



Account

TestAccount1



Type

Phone

Website

RELATED

DETAILS

NEWS

15. Scroll down the Details page until you see the "Call Logging View" section

Call Logging View				
CALL DATE	PHONE NUMBER	CALL TYPE	PHONE CALL DURATION	CALL IDENTIFIER
Thu Jun 07 16:59:54 GMT 2018	+44 [REDACTED]	Inbound	0 min 31 sec	805f8089-3646-4f9b-ae73-be9236aa26a1
Thu Jun 07 08:17:07 GMT 2018	+44 [REDACTED]	Inbound	0 min 23 sec	a0a42712-6d3d-4700-b650-d6b8aae189cc
Thu May 17 06:55:21 GMT 2018	+44 [REDACTED]	Inbound	0 min 10 sec	37491b40-85a7-4feb-a388-fd2c69ea8eb2
Tue May 08 18:26:50 GMT 2018	+44 [REDACTED]	Inbound	0 min 38 sec	994fbea6-94a6-4cf1-a118-a7c31cc39099
Tue May 08 18:00:11 GMT 2018	+44 [REDACTED]	Outbound	0 min 4 sec	40c6ad53-429a-42a2-b4c0-d46b20c109b6

For more information on how to add a Visualforce Page to a Page layout, please visit:

https://trailhead.salesforce.com/en/modules/visualforce_mobile_salesforce1/units/visualforce_mobile_salesforce1_layouts_cards

Outbound Campaign Calls

The package allows for running Outbound Call Campaigns using Salesforce Omni Channel routing and Amazon Connect. To enable outbound campaigns, the Custom Object called **Amazon Connect Call Campaign**, which comes bundled with the Adapter, must be configured to be routed by Salesforce Omni.

Outbound call campaigns are a feature of the package that utilizes Omni-Channel routing and Amazon Connect. To use the Call Campaigns, we must first configure the following items:

1. Create a Queue for users to manage a workload and configure it for the custom object.

2. Create a Service Channel and configure it for the custom object.
3. Create a Routing Configuration.
4. Associate the Routing Configuration with the Agents and the Queue.
5. Create a Presence Status and Configuration and assign it to the Users.

First, we must enable omni-channel. To do this, navigate to "Setup" and type "omni" into the Quick Find box, then select "Omni-Channel Settings" from the menu.

 omni

▼ Feature Settings

 ▼ Service

 ▼ Omni-Channel

 ▼ Agent Work

 Agent Work Limits

 Agent Work Triggers

 Agent Work Validatio...

 Limits

 Omni-Channel Settings



 Presence Configurations

 Presence Decline Reaso...

Place a check in the checkbox for "Enable Omni-Channel".



SETUP

Omni-Channel Settings

Omni-Channel Settings

Welcome to Omni-Channel!

Work Limits
Work Triggers
Work Validatio...

nel Settings
onfigurations

ecline Reaso...

atuses

nfigurations

nnels

ices

ience Limits

ience Triggers

ience Valida...

looking for?

Omni-Channel is a comprehensive customer service solution that lets contact centers push work to Omni-Channel. Omni-Channel lets you create work items from your Salesforce records—including cases, chats, leads, objects—and route them to the most qualified, available agents in your organization, all in real time. It integrates seamlessly into the Salesforce console, so it's easy for your support agents to use.

With Omni-Channel, you can manage the priority of work items to make sure that critical assignments get handled quickly. You can manage your agents' capacity and availability for work to ensure that they're given assignments that they can handle. You can also define which agents can work on different types of work items. Omni-Channel routes all of these assignments to the correct agents automatically. Agents no longer have to work items manually from a queue, and managers no longer have to triage or dispatch work to agents based on the most qualified available agent in real time!

Show diagram ▾

First, you need to enable Omni-Channel. Then, [create Service Channels](#).

Enable Omni-Channel This must be checked

Use Skills-Based Routing

Save **Cancel**

Create a Queue

Navigate to "Setup" and type "queue" into the Quick Find box, then select "Queues" from the menu.



Search Setup



Setup

Home

Object Manager

 queues

▼ Users

Queues

Didn't find what you're looking for?
Try using Global Search.



SETUP

Queues

Queues

Queues allow groups of users to manage a shared workload more effectively. A queue is a location where records can be routed to await processing by a group member. The records remain in the queue until a user accepts them for processing or they are transferred to another queue. You can specify the set of objects that are supported by each queue, as well as the set of users that are allowed to retrieve records from the queue.

View: [Edit](#) | [Create New View](#)

You may see some entries if you are already using Omni-Channel for other things in your instance. We want to create a new queue for the purpose of handling these outbound call campaigns.

SETUP
Queues

Queues Help for this page

Queues allow groups of users to manage a shared workload more effectively. A queue is a location where records can be routed to await processing by a group member. The records remain in the queue until a user accepts them for processing or they are transferred to another queue. You can specify the set of objects that are supported by each queue, as well as the set of users that are allowed to retrieve records from the queue.

View: [Edit](#) | [Create New View](#)

Action	Label	Queue Name	Queue Email	Supported Objects	Modified By	Last Modified
Edit Del	TestChatQueue	TestChatQueue		Amazon Connect Historical Report Data; Amazon Connect Call Campaign; Agent Work; Case; Goal; Knowledge Article Version; Lead; Live Agent Session; Live Chat Transcript; Macro; Metric; Order; Quick Text; Scorecard; User Provisioning Request; User Presence; Coaching; Feedback; Feedback Question; Feedback Question Set; Feedback Request; Feedback Template; Performance Cycle		15/09/2018



On the Queues screen, click the "New" button. Fill-in the required fields and then scroll down the screen until you see "Supported Objects". Select the Amazon Connect Call Campaign object and click the "Add" button.



SETUP

Queues

Supported Objects

Select the objects you want to assign to this queue. Individual records for those objects can then be owned by this queue.

Available Objects	Selected Objects
Amazon Connect Historical Report Data	--None--
Agent Work	
Amazon Connect Call Campaign	1
Case	
Goal	
Knowledge Article Version	
Lead	
Live Agent Session	
Live Chat Transcript	
Macro	
Metric	
Order	
Quick Text	
Scorecard	

The interface shows a list of available objects on the left and selected objects on the right. An orange arrow points from the 'Amazon Connect Call Campaign' entry in the available list to the 'Selected Objects' list. A red circle highlights the 'Add' button in the center, which has a red number '2' indicating pending additions. The 'Selected Objects' list currently contains one item, 'Amazon Connect Call Campaign'.

Queue Members

To add members to this queue, select a type of member, then choose the group, role, or user from the "Available Members". If the Queue is Public Read/Write/Transfer, you do not need to assign users to the queue, as all users already have

Search: for:

Available Members	Selected Members
User: [REDACTED]	--None--
User: [REDACTED]	
User: [REDACTED]	
User: [REDACTED]	

The 'Available Members' list shows four user entries, each starting with 'User:'. The 'Selected Members' list is currently empty, showing '--None--'.


Scroll down to the Queue members to select the members of the queue. You can assign the queue by Public Groups, Roles, Roles and Subordinates, or Users. If you need to wade through many users, groups, or roles, feel free to use the "Find" feature.

Once you have found the entity you'd like to add, select it and click Add, just like we did with the object in the previous step.



SETUP Queues

- User Presence
- Coaching
- Feedback
- Feedback Question
- Feedback Question Set
- Feedback Request
- Feedback Template
- Performance Cycle



Queue Members

To add members to this queue, select a type of member, then choose the group, role, or user from the "Available Members" list. If the Queue is Public Read/Write/Transfer, you do not need to assign users to the queue, as all users already

Search: for:

Available Members

- User:
- User: **User:** 1
- User:
- User:

Selected Members

- None--

Add
Remove

Now, our queue has been created and assigned to users.



Queues

[Help for this Page](#)

Queues allow groups of users to manage a shared workload more effectively. A queue is a location where records can be routed to await processing by a group member. The records remain in the queue until a user accepts them for processing or they are transferred to another queue. You can specify the set of objects that are supported by each queue, as well as the set of users that are allowed to retrieve records from the queue.

View: [All](#) ▾ [Edit](#) | [Create New View](#)

[A](#) | [B](#) | [C](#) | [D](#) | [E](#) | [F](#) | [G](#) | [H](#) | [I](#) | [J](#) | [K](#) | [L](#) | [M](#) | [N](#) | [O](#) | [P](#) | [Q](#) | [R](#) | [S](#) | [T](#) | [U](#) | [V](#) | [W](#) | [X](#) | [Y](#) | [Z](#) | Other | [All](#)

[New](#)

Action	Label	Queue Name	Queue Email	Supported Objects	Modified By	Last Modified Date
Edit Del	Call Campaign	Call_Campaign		Amazon Connect Call Campaign	[REDACTED]	21/09/2018 04:07

Amazon Connect Historical Report Data; Amazon Connect Call Campaign; Agent Work; Case; Goal;

Create a Service Channel

Click into the Setup search box in the left navigation panel and type "Service Channel". Then click "Service Channels".

 service channel

✓ Feature Settings

✓ Service

✓ Omni-Channel

Service Channels



Didn't find what you're looking for?

Try using Global Search.

Click "New" to create our new Service Channel.



SETUP

Queues

Queues

Queues allow groups of queue until a user accept allowed to retrieve record

View: [Edit](#) | [Cr](#)

Action	Label ↑
Edit Del	Call Campaign



SETUP

Service Channels

Service Channels let you turn any Salesforce object—such as a case, lead, SOS session, or even a custom object—into a work record. Omni-Channel then plucks these work items from their queues—like flowers from the garden of agent productivity—and routes them to your agents in real time.

Does your organization use Live Agent for chats or SOS for video calls? If so, you'll notice that Salesforce creates those Service Channels for you automatically, so you can get up and running using Live Agent and SOS with Omni-Channel right away.

Show diagram ▾

Let's get this party started and create a new Service Channel. After you create a Service Channel, [create a Routing Configuration](#) to determine how work items are pushed to your agents.

View: All ▾ [Create New View](#)

A | B | C | D | E | F | G | H | I | J | K | L | M | N | C

New



Action Service Channel Name ↑

Developer Name

Edit [Live Agent](#)

SETUP

Service Channels

Service Channels let you turn any Salesforce object—such as a case, lead, SOS session, or even a custom object—into a work record. Omni-Channel then plucks these work items from their queues—like flowers from the garden of agent productivity—and routes them to your agents in real time.

Show me an example ▾

After you create a Service Channel, [create a Routing Configuration](#) to determine how work items are pushed to your agents.

We have resources that will help you up Omni-Channel for your organizational

[Create Service Channels](#)
Need help creating your first Service Salesforce help.

[Service Channel Settings](#)
Learn more about what individual se

[Set Up Omni-Channel - implemen](#)
Snuggle up with a cup of cocoa and end-to-end process of setting up On

Save Cancel

Basic Information

Service Channel Name

Call Campaign Channel



Developer Name

Call_Campaign_Channel

Salesforce Object

Amazon Connect Call Campaign



Custom Console Footer Component

3



Save Cancel

In the new Service Channel form, enter your desired Service Channel Name (step 1). The Developer Name field will auto-populate based on the Service Channel Name content. Then, select the [Amazon Connect Call Campaign]{.ul} object (step 2). Finally, save the new Service Channel (step 3).



SETUP

Service Channels

[« Back to List: Service Channels](#)

Basic Information

[Edit](#) [Delete](#)

Service Channel Name	Call Campaign Channel
Developer Name	Call_Campaign_Channel
Salesforce Object	Amazon Connect Call Campaign

Custom Console Footer Component

Create a Routing Configuration

Now, we need to create a routing configuration. Enter "routing" into the search box in the left navigation and click "Routing Configurations".



Setup

Home

Project Manager

 routing

Feature Settings

Service

Omni-Channel

Routing Configurations

Didn't find what you're looking for?

Try using Global Search.

Service

[« Back to List:](#)

Basic Info

Custom Conso

1. On the Routing Configurations landing page, click "New".

SETUP

Routing Configurations

Routing Configurations

Routing Configurations determine how work items are routed to agents. They let you prioritize the relative importance and size of work items across your Omni-Channel Queues. Since not all work items take the same amount of effort, Routing Configurations let you control the relative size of items in your Queues so agents can focus the right amount of attention on their work. That way, the most important work items are handled accordingly, and work is evenly distributed to your agents. After all, we want to make sure every agent gets to have an equal amount of fun, right?

Show diagram ▾

After you create your Routing Configuration, you need to associate Routing Configurations with [Queues](#). The items in that Queue are pushed to your agents based on the settings in your Routing Configuration. For routing to work correctly, make sure all of your agents are assigned to your Omni-Channel Queues.

View: All ▾ [Create New View](#)

Action	Routing Configuration Name ↑	Developer Name	Routing Priority	Routing Model
Edit Del	TestRouting	TestRouting	1	Most Available

SETUP

Routing Configurations

Routing Configurations determine how work items are routed to agents. They let you prioritize the relative importance and size of work items across your Omni-Channel Queues. Since not all work items take the same amount of effort, Routing Configurations let you control the relative size of items in your Queues so agents can focus the right amount of attention on their work. That way, the most important work items are handled accordingly, and work is evenly distributed to your agents. After all, we want to make sure every agent gets to have an equal amount of fun, right?

Show diagram ▾

After you create your Routing Configuration, you need to associate Routing Configurations with [Queues](#). The items in that Queue are pushed to your agents based on the settings in your Routing Configuration. For routing to work correctly, make sure all of your agents are assigned to your Omni-Channel Queues.

We have up Omni

Create F
Need he
Salesfor

Set Up C
Snuggle
end-to-e

We have resou
up Omni-Chan

Create Routin
Need help crea
Salesforce help

Routing Conf
Learn more abo

Set Up Omni-
Snuggle up wit
end-to-end pro

Basic Information

Routing Configuration Name	<input type="text" value="Call Campaign Routing Co"/> 1
Developer Name	<input type="text" value="Call_Campaign_Routing_C"/>
Overflow Assignee	If you don't give the overflow assignee access to the object types in your queues and set an overflow assignment won't work.
User	<input type="text"/>

Optional

Routing Settings

The routing priority determines the order in which work items across your Omni-Channel queues get pushed to your agents. Lower-priority items

The routing model determines how to evenly distribute work items to your agents. It acts as a tiebreaker if two or more agents qualify to take c

the fewest number of open work items. Most Available routes to the agent with the most open capacity in proportion to their set capacity.

Enter the Routing Configuration Name (step 1), and the Developer Name will auto-populate. If you'd like to set an Overflow Assignee, you can optionally do that at this point. The overflow assignee will receive work if your organization reaches its Omni-Channel limits. This setting has no effect until the limits are reached.

The screenshot shows the 'Routing Settings' configuration page. At the top, there is a dropdown menu labeled 'User'. Below it, the 'Routing Settings' section contains three fields: 'Routing Priority' (set to 2), 'Routing Model' (set to 'Most Available'), and 'Push Time-Out (seconds)' (empty). Orange arrows numbered 1, 2, and 3 point to the 'Routing Model', 'Push Time-Out', and 'Units of Capacity' fields respectively. Below this, the 'Work Item Size' section contains two fields: 'Units of Capacity' (set to 5) and 'Percentage of Capacity' (empty). An orange arrow numbered 4 points to the 'Save' button at the bottom right of the form.

User

Routing Settings

The routing priority determines the order in which work items across your Omni-Channel queues get pushed to your agents. Lower-priority items are pushed first.
The routing model determines how to evenly distribute work items to your agents. It acts as a tiebreaker if two or more agents qualify to take on the same work item. Least Active routes to the agent with the fewest number of open work items. Most Available routes to the agent with the most open capacity in proportion to their set capacity.

Routing Priority 2

Routing Model Most Available

Push Time-Out (seconds)

Work Item Size

Specify the size of the work items in the queues associated with this configuration. You can size items by number of units or percentage of the agent's capacity, but not both.

Units of Capacity 5

Percentage of Capacity

Save Cancel

Next, you must configure the Routing Settings. First, (step 1) enter the priority of the work across the Omni-Channel queues. Second (step 2), select the model to use to act as the tie-breaker between agents. Third, (step 3) specify the units of capacity or percentage of capacity of the work items in the queue. Finally, (step 4), click "Save".



SETUP

Routing Configurations

[« Back to List: Routing Configurations](#)

Basic Information

[Edit](#)

[Delete](#)

Routing Configuration Name Call Campaign Routing Config

Developer Name Call_Campaign_Routing_Config

Overflow Assignee

▼ Routing Settings

Routing Priority 2

Routing Model Most Available

Push Time-Out (seconds)



Units of Capacity 5.00

Percentage of Capacity

▼ Related Queues

Label	Queue Name

You have created your Routing Configuration.

Now, we need to assign the Routing Configuration to our queue. From the Quick Find in Setup, enter "queues" and then select "Queues" (step 1).

queues

Users Queues

Queues

Didn't find what you're looking for? Try using Global Search.

View: All ▾ Edit | Create New View

A | B | C | D | E | F | G | H | I | J | K | L | M | New

Action	Label	Queue Name	Queue Email	Supported Objects
Edit Del	Call Campaign	Call_Campaign		Amazon Connect Call Campaign
Edit Del	TestChatQueue	TestChatQueue		Amazon Connect Historical Report Data; Amazon Connect Call Campaign; Agent Work Log; Case; Contact; Customer Profile; Device; Feedback; Feedback Question Set; Feedback Request; Feedback Template; Knowledge Article Version; Lead; Live Agent Session; Live Chat Transcript; Macro; Message; Scorecard; User Provisioning Request; User Presence; Coaching; Feedback; Feedback Response; Feedback Template; Performance Cycle

Click on the "Edit" link next in the row of the queue that was created earlier (step 2).

Enter the name of the queue and the email address to use when sending notifications (for example). When an object is assigned to a queue, only the queue members will be notified.

Label	Call Campaign	
Queue Name	Call_Campaign	
Queue Email		
Send Email to Members	<input type="checkbox"/>	

Configuration with Omni-Channel Routing

If your organization uses Omni-Channel, you can link queues to a routing configuration. This section shows how to do that.

Routing Configuration



Supported Objects

Use the magnifying glass button to search for our new Routing Configuration created earlier.



Lookup

Go!

You can use "*" as a wildcard next to other characters to improve your search results.

Search Results

Routing Configuration Name	Developer Name	Routing Priority	Routing Model	Units of Capacity	Percentage
TestRouting	TestRouting	1	Most Available	5.00	
Call Campaign Routing Config	Call_Campaign_Routing_Config	2	Most Available	5.00	

Copyright © 2000-2018 salesforce.com, inc. All rights reserved.

Select our Routing Configuration from the Lookup window.

Queues

Edit Queue

Call Campaign

Queue Edit

Save**Cancel**

Queue Name and Email Address

Enter the name of the queue and the email address to use when sending notifications (for example, when a case is assigned to a queue). When an object is assigned to a queue, only the queue members will be notified.

Label



Queue Name



Queue Email

Send Email to Members

Configuration with Omni-Channel Routing

If your organization uses Omni-Channel, you can link queues to a routing configuration. This will push work from the queue to the routing configuration.

Routing Configuration

[Campaign_Routing_Config](#)




Supported Objects

Click "Save" to store our changes.

The next steps are to create and configure the Presence Statuses.

Outbound Campaign Custom Object Using Salesforce Data Loader

The following is a description of the steps using the Salesforce Data Loader to insert outbound call campaign records. The Data Loader can be obtained from <https://dataloader.io/>

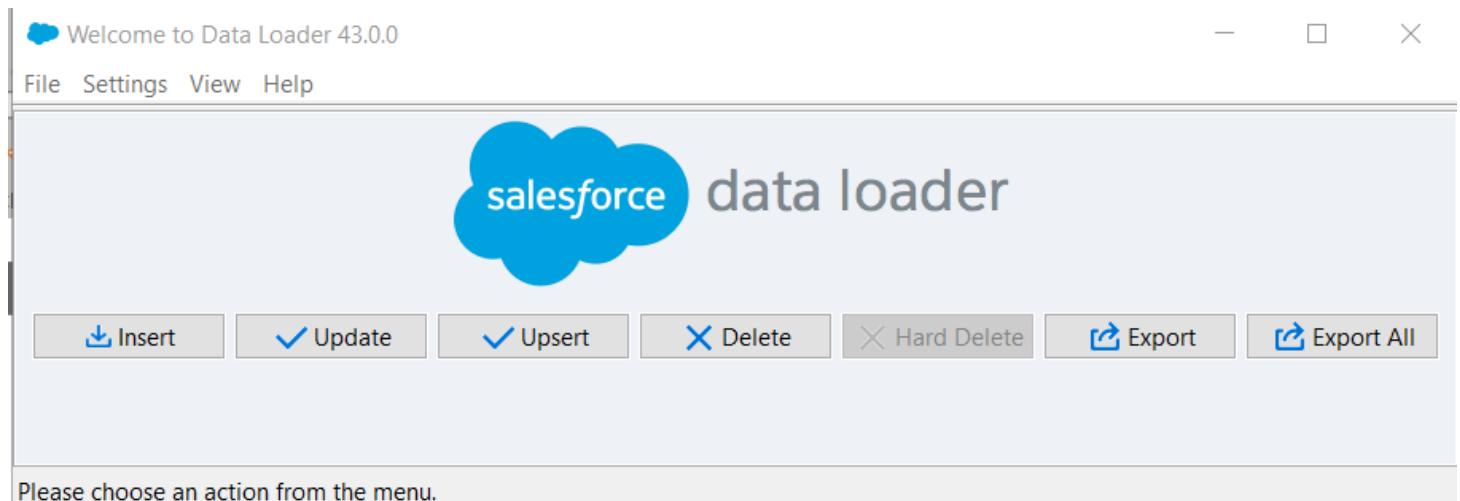

Start by exporting the call campaign custom object. From the Data Loader UI, click the "Export" button.

You will be prompted to Login. Select OAuth as the method and then provide your Salesforce login credentials.

From the list of Salesforce objects select the **Amazon Connect Call Campaign** and export it to CSV file.

Step 2: Select Data Objects

Select your Salesforce object and your target file



Select Salesforce Object:

Show all Salesforce objects

Account (Account)

Amazon Connect Call Campaign (actoolkit_Call_Campaign_c)

Amazon Connect Historical Report Data (actoolkit_ACT_HistoricalReportData_c)

Case (Case)

Contact (Contact)

Event (Event)

Lead (Lead)

Opportunity (Opportunity)

Choose a target for extraction:

< Back

Next >

[Finish](#)

[Cancel](#)

Next, we need the Object ID of the Queue that was created earlier. To obtain that, use the Data Loader to extract a listing of Queues. You will want to query for the QueueId.

Choose the query fields below.

<input checked="" type="checkbox"/> Id
<input checked="" type="checkbox"/> QueueId
<input type="checkbox"/> SubjectType
<input type="checkbox"/> CreatedById
<input type="checkbox"/> SystemModstamp

Create the where clauses to your query below.

Fields	Operation	Value
<input type="text"/>	<input type="text"/>	<input type="text"/>

The generated query will appear below. You may edit it before finishing.

Select Id, QueueId FROM QueueSubject

In this example, we want to pop Contact records when the outbound call is presented to the agent, so let's export a list of Contact to be called.

Select Salesforce Object:

Show all Salesforce objects

- Account (Account)
- Amazon Connect Call Campaign (actoolkit_Call_Campaign_c)
- Amazon Connect Historical Report Data (actoolkit_ACT_HistoricalReportData_c)
- Case (Case)
- Contact (Contact)
- Event (Event)
- Lead (Lead)
- Opportunity (Opportunity)
- Price Book (Pricebook2)

Choose a target for extraction:

Query for all or specific Contacts, based on pre-defined criteria. At a minimum, you will need to extract a list of the Id and Phone number of the Contact.

Choose the query fields below.

<input checked="" type="checkbox"/> Id	<input type="checkbox"/> IsDeleted	<input type="checkbox"/> MasterRecordId
<input type="checkbox"/> Name	<input type="checkbox"/> RecordType	<input type="checkbox"/> SystemModstamp
<input type="checkbox"/> AccountId	<input type="checkbox"/> ContactId	<input type="checkbox"/> LastModifiedDate
<input type="checkbox"/> CaseId	<input type="checkbox"/> LeadId	<input type="checkbox"/> ParentRecordId
<input type="checkbox"/> Email	<input type="checkbox"/> LastName	<input type="checkbox"/> RecordTypeId
<input type="checkbox"/> FirstName	<input type="checkbox"/> MailingAddress	<input type="checkbox"/> RevisionNumber
<input type="checkbox"/> LastName	<input type="checkbox"/> MailingCity	<input type="checkbox"/> SystemName
<input type="checkbox"/> MailingCountry	<input type="checkbox"/> MailingPostalCode	<input type="checkbox"/> Type
<input type="checkbox"/> MailingState	<input type="checkbox"/> MailingStreet	

Create the where clauses to your query below.

Fields	Operation	Value
<input type="text"/>	<input type="button"/>	<input type="text"/>
<input type="button"/> Add condition		<input type="button"/> Clear all conditions

Select all fields Clear all fields

The generated query will appear below. You may edit it before finishing.

Select Id, Phone FROM Contact

< Back Next > Finish Cancel

Using the data extracted in the Queue listing and the Contact listing files, construct the outbound campaign, by using the first file what was exported as a template. Open the exported "**Amazon Connect Call Campaign**" in a spreadsheet application, such as Microsoft Excel, and build a list of Contacts to be called.

	A	B	C	D	E	F	G
1	OWNERID	ACCOUNT__C	CASE__C	CONTACT__C	LEAD__C	OPPORTUNITY__C	PHONE_NUMBER__C
2	00G1U000000EIDcUAK			0031U000004WGR5QAO			(702) 555-0111
3	00G1U000000EIDcUAK			0031U000004WGR6QAO			(702) 555-0112
4	00G1U000000EIDcUAK			0031U000004WGR7QAO			(702) 555-0113
5	00G1U000000EIDcUAK			0031U000004WGR8QAO			(702) 555-0114
6	00G1U000000EIDcUAK			0031U000004WGR9QAO			(702) 555-0115
7	00G1U000000EIDcUAK			0031U000004WGTRAQAA4			(702) 555-0116
8	00G1U000000EIDcUAK			0031U000004WGRBQAA4			(702) 555-0117
9	00G1U000000EIDcUAK			0031U000004WGRCCAA4			(702) 555-0118

In the example above, the **OWNERID** column contains the QueueId obtained from the export of Queues.

The **CONTACT__C** column contains the Id of the Contact we want presented to the agent, when the outbound call is initiated, and the **PHONE_NUMBER__C** field contains the phone number to be automatically dialed by Amazon Connect CCP.

Once you have built the campaign file, save it as a CSV file and then import it into Salesforce, using the Data Loader. Select "**Amazon Connect Call Campaign**" as the target of the upload.

Select Salesforce object:

Show all Salesforce objects

Account (Account)

Amazon Connect Call Campaign (actoolkit_Call_Campaign_c)

Amazon Connect Historical Report Data (actoolkit_ACT_HistoricalReportData_c)

Case (Case)


Contact (Contact)

Event (Event)

Lead (Lead)

Opportunity (Opportunity)

Once the campaign has been uploaded, the campaign records will be added to the queue and the agents who are assigned to that queue should start receiving the outbound requests in their Omni-Channel widget.

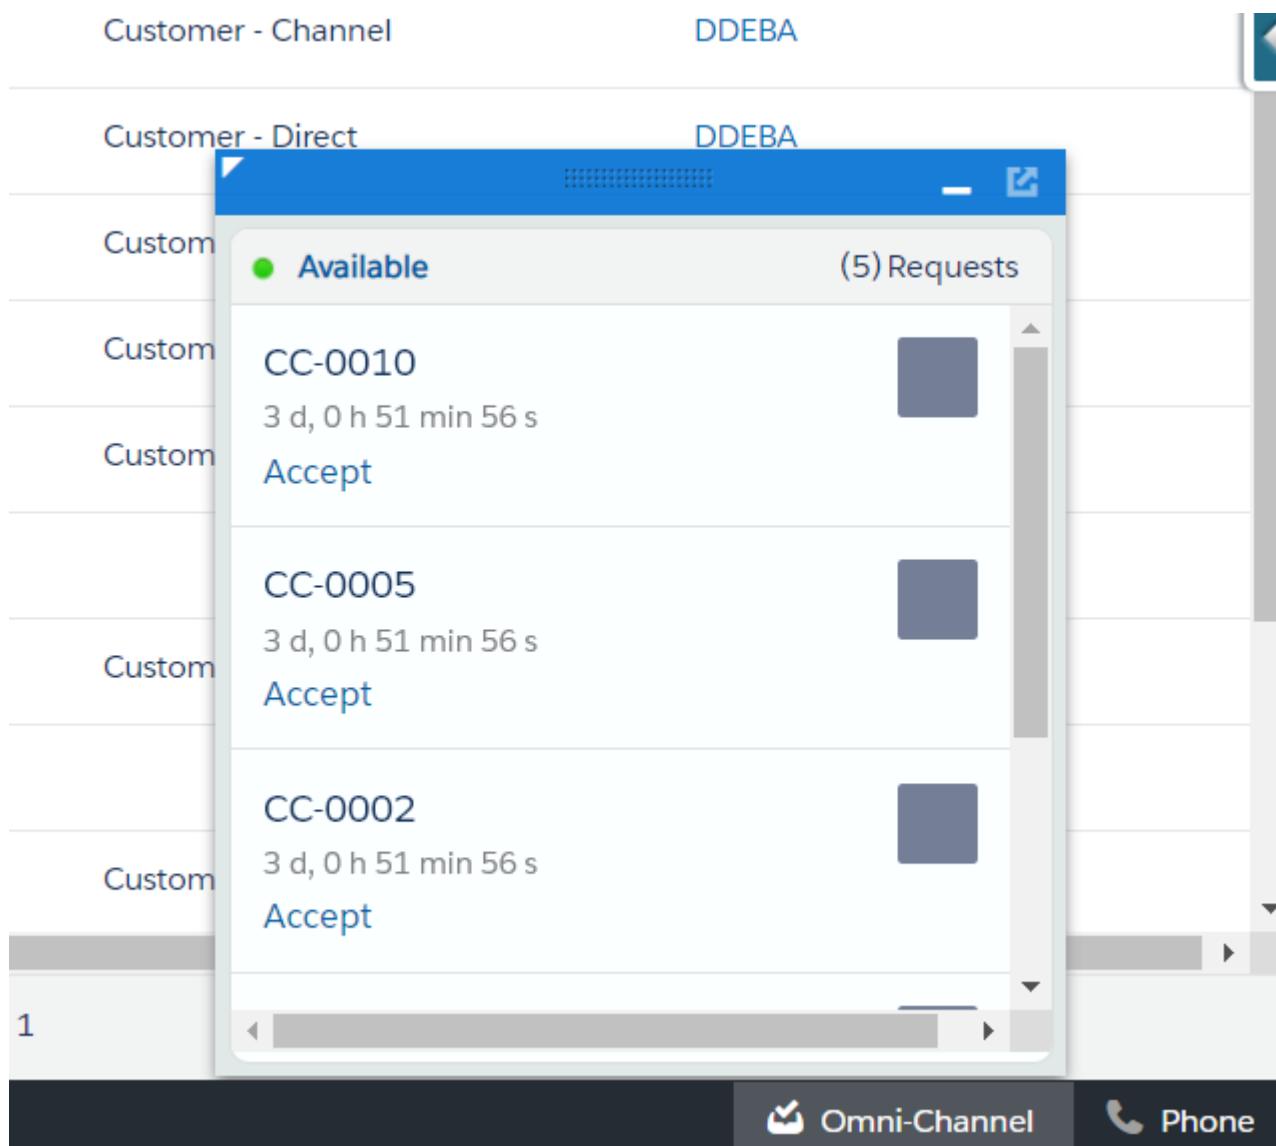

Amazon Connect Reports in Salesforce

Out of the box, within Amazon Connect, you can generate a number of real-time and historical metric reports to monitor efficiency and utilization, agent performance, and other information about your contact center.

Real-time metrics reports show real-time or near-real time metrics information about activity in your contact center. Historical metrics reports include data about past, completed activity and performance in your contact center. You can customize the default report settings to get the view of the data that is most meaningful to you and your organization. You can change the time frame for the report, which metrics are included in the report, and how the data is grouped within the report.

Amazon Connect provides you the ability to export reports to the S3 bucket of your choice, in comma separated value (CSV) format. This enables broad compatibility across many analytics and WFM tools. Encryption is enabled by default for all saved reports, using S3 server-side encryption with KMS. Disabling encryption is not recommended. You can schedule reports run hourly, daily, and monthly. The output will be stored in the S3 bucket. Each report can have different name and prefix.

For the particular integration, at 30-minute intervals, Amazon Connect generates CSV reports which contain statistics for the last (30 minute) period. Two different reports are available to transport Agent and Queue interval data from Amazon Connect to Salesforce.

Each time a new report is exported, S3 is going to trigger a Lambda function from Amazon Connect Salesforce Lambda package (AWS Serverless Application Repository), which is going to import the data into your Salesforce instance.

Amazon Connect scheduled, Agent and Queue reports, are not automatically configured by the Amazon Connect Salesforce Lambda package, therefore the first step would be to create and schedule these reports.

In your Amazon Connect instance, navigate to Metrics and Quality > Historical metrics. By default, you will be able to see the two reports needed for this integration: "Contact metrics" and "Agent Performance".



A screenshot showing two tabs: "Queues" and "Agents". The "Queues" tab is selected and shows the sub-section "Contact metrics" with a gear icon for configuration. The "Agents" tab is also visible with its own sub-section "Agent performance".

Click on the "Contact metrics" to open the report and then click on the grey gear icon on the right-hand side to configure it.

A screenshot of the "Historical metrics" configuration page. It includes sections for "Interval" (set to "Total"), "Time range" (Nov 16, 2018, 12:00 AM - Nov 23, 2018, 12:00 AM), "Time Zone" (UTC), and a "Save" button with a dropdown menu.

Set the report configuration by following the screenshots below:

Table Settings

X

Interval & Time range

Groupings

Filters

Metrics

0 Interval

30 Minutes ▾

Time Zone

UTC ▾

07 Time range

Last 24 hours ▾

Table Settings

X

Interval & Time range

Groupings

Filters

Metrics

Select the values you'd like to group your metrics by, and add them to the right in the order you prefer.

Grouping options

Selected groupings (Maximum 5)

Agent

+

Queue

-

Agent Hierarchy Level One

+

i

2

Agent Hierarchy Level Two

+

i

3

Agent Hierarchy Level Three

+

i

4

Agent Hierarchy Level Four

+

i

5

Agent Hierarchy Level Five

+

i

Routing Profile

+

Phone Number

+

Optionally set the filters:

Table Settings

X

Interval & Time range

Groupings

Filters

Metrics

Queues that match these filters will be displayed on the table

Queue

Routing profile

Agent hierarchy

Phone number

Queue

Show metrics only for contacts handled in these queues:

 Search

And most importantly, select the correct metrics in the last tab:

Table Settings

X

Interval & Time range

Groupings

Filters

Metrics

Metrics are displayed to the right of grouping columns.

Contact metrics

Agent metrics

 Search

Metrics definitions 

Agent Name 

Agent First Name 

Agent Last Name 

After contact work time

Agent on contact time

Agent idle time

Non-Productive Time 

Average queue abandon time

Average after contact work time

Average queue answer time

Average handle time

Average customer hold time

Average agent interaction and customer hold time

Average agent interaction time

Contacts abandoned

Contacts abandoned in 15 seconds

Contacts abandoned in 20 seconds

Contacts abandoned in 25 seconds

Contacts abandoned in 30 seconds

Contacts abandoned in 45 seconds

Contacts abandoned in 60 seconds

Contacts abandoned in 90 seconds

Contacts abandoned in 120 seconds

Contacts abandoned in 180 seconds

Contacts abandoned in 240 seconds

Contacts abandoned in 300 seconds

Contacts abandoned in 600 seconds

Contacts agent hung up first

Contacts consulted

Contacts handled

Contacts handled incoming

- | | |
|---|--|
| <input checked="" type="checkbox"/> Contacts handled outbound | <input type="checkbox"/> Callback contacts handled |
| <input type="checkbox"/> API contacts handled | <input checked="" type="checkbox"/> Contacts put on hold |
| <input checked="" type="checkbox"/> Contacts hold disconnect | <input checked="" type="checkbox"/> Contacts hold agent disconnect |
| <input checked="" type="checkbox"/> Contacts hold customer disconnect | <input checked="" type="checkbox"/> Contacts incoming |
| <input type="checkbox"/> Callback Contacts | <input type="checkbox"/> API Contacts |
| <input checked="" type="checkbox"/> Contacts answered in 15 seconds | <input checked="" type="checkbox"/> Contacts answered in 20 seconds |
| <input type="checkbox"/> Contacts answered in 25 seconds | <input checked="" type="checkbox"/> Contacts answered in 30 seconds |
| <input checked="" type="checkbox"/> Contacts answered in 45 seconds | <input checked="" type="checkbox"/> Contacts answered in 60 seconds |
| <input checked="" type="checkbox"/> Contacts answered in 90 seconds | <input checked="" type="checkbox"/> Contacts answered in 120 seconds |
| <input checked="" type="checkbox"/> Contacts answered in 180 seconds | <input checked="" type="checkbox"/> Contacts answered in 240 seconds |
| <input checked="" type="checkbox"/> Contacts answered in 300 seconds | <input checked="" type="checkbox"/> Contacts answered in 600 seconds |
| <input checked="" type="checkbox"/> Contacts queued | <input checked="" type="checkbox"/> Contacts transferred in |
| <input checked="" type="checkbox"/> Contacts transferred out | <input type="checkbox"/> Contacts transferred out internal |
| <input type="checkbox"/> Contacts transferred out external | <input checked="" type="checkbox"/> Contacts transferred in from queue |
| <input checked="" type="checkbox"/> Contacts transferred out from queue | <input type="checkbox"/> Error status time  |

- | | |
|---|--|
| <input checked="" type="checkbox"/> Customer hold time | <input checked="" type="checkbox"/> Agent answer rate |
| <input checked="" type="checkbox"/> Maximum queued time | <input checked="" type="checkbox"/> Contacts missed |
| <input checked="" type="checkbox"/> Contact handle time | <input checked="" type="checkbox"/> Contact flow time |
| <input checked="" type="checkbox"/> Occupancy | <input checked="" type="checkbox"/> Service level 15 seconds |
| <input checked="" type="checkbox"/> Service level 20 seconds | <input checked="" type="checkbox"/> Service level 25 seconds |
| <input checked="" type="checkbox"/> Service level 30 seconds | <input checked="" type="checkbox"/> Service level 45 seconds |
| <input checked="" type="checkbox"/> Service level 60 seconds | <input checked="" type="checkbox"/> Service level 90 seconds |
| <input checked="" type="checkbox"/> Service level 120 seconds | <input checked="" type="checkbox"/> Service level 180 seconds |
| <input checked="" type="checkbox"/> Service level 240 seconds | <input checked="" type="checkbox"/> Service level 300 seconds |
| <input checked="" type="checkbox"/> Service level 600 seconds | <input type="checkbox"/> Online time ! |
| <input checked="" type="checkbox"/> Agent interaction and hold time | <input checked="" type="checkbox"/> Agent interaction time |
| <input checked="" type="checkbox"/> Agent interaction and hold time | <input checked="" type="checkbox"/> Agent interaction time |
| <input checked="" type="checkbox"/> Average outbound agent interaction time | <input checked="" type="checkbox"/> Average outbound after contact work time |
| <input type="checkbox"/> Lunch time ! | <input type="checkbox"/> Break time ! |

[Cancel](#)

[Apply](#)

Once metrics are selected, click the Apply button. Next, click the drop-down arrow on the right-hand side and select Schedule.

Save



Save as

Download CSV

Share report

Schedule

Set the report name, for instance *sfIntervalQueue* and click Continue

Schedule report

X

First, name your report.

Name sflIntervalQueue

Cancel

Continue

Schedule report

X

Note

Once you schedule a report, it will be published to your organization, and all individuals who have proper permissions will be able to access it.

Cancel

Continue

On the next screen, set Recurrence as:

Recurrence

Delivery Options

Generate this report

Hourly ▼ every 0.5 ▼ hour(s)

Starting at

Time zone

1 am ▼ UTC

For the previous

0.5 ▼ hour(s)

Switch to Delivery Options tab and set the Prefix as SFDC/Queue

Recurrence

Delivery Options

Default location

connect-62 [REDACTED] d2/connect/[REDACTED]-test8/Reports

Prefix

SFDC/Queue



| Click the Create button to create the Schedule for the report. The report can be found in Metrics and quality > Saved Reports > Historical metrics



Metrics and quality



Real-time metrics



Historical metrics

Contact search

Login/Logout report

Saved reports

Dashboard

Real-time metrics

Historical metrics

Login/Logout report

Search by report name

Name

Schedule report

sfIntervalQueue



Click on the Clock (Schedule Report) icon to see the configuration. Please note the File name and the Path for the CSV file to be created.

Schedule 1

Repeats: HOURLY - runs every 0.5 hour(s), starting at 01:00 (UTC), for the previous 0.5 hour(s).

File name: connect-62[REDACTED]2/connect/[REDACTED]-test8/Reports/SFDC/Queue/sfIntervalQueue-YYYY-MM-DDThh:mm:ssZ.csv

Next run: Friday, November 23, 2018 6:00:00 PM UTC


Last run: Friday, November 23, 2018 5:15:26 PM UTC

The Queue Interval report has been created and scheduled to export the data. After a while, you will be able to see CSV files in the S3 bucket.


Viewing 1 to 60			
Name	Last modified	Size	Storage class
sfIntervalQueue-2018-11-22T12:00:00Z.csv	Nov 22, 2018 12:15:27 PM GMT+0000	625.0 B	Standard
sfIntervalQueue-2018-11-22T12:30:00Z.csv	Nov 22, 2018 12:45:27 PM GMT+0000	512.0 B	Standard
sfIntervalQueue-2018-11-22T13:00:00Z.csv	Nov 22, 2018 1:15:27 PM GMT+0000	512.0 B	Standard

Repeat the steps for the Agent Interval report:

In your Amazon Connect instance, navigate to Metrics and Quality > Historical metrics.

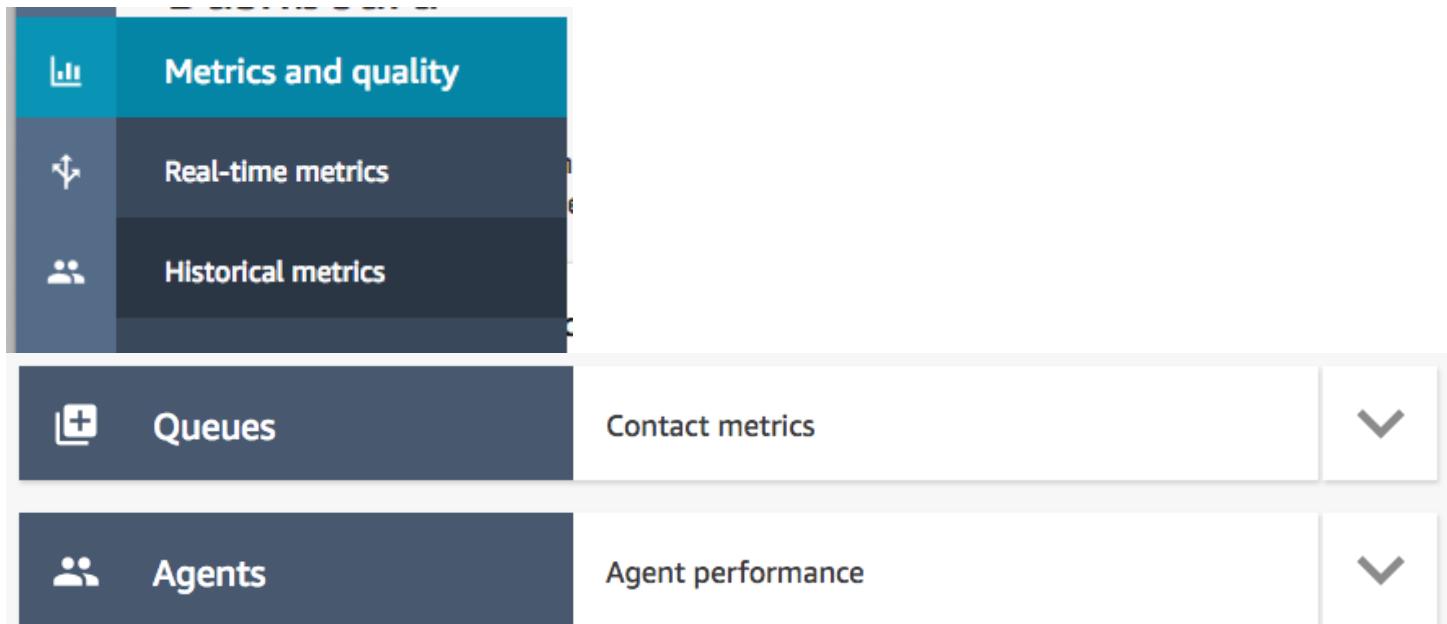

Choose the "Agent Performance" metrics to open the report and then click on the grey gear icon on the right-hand side to configure it.

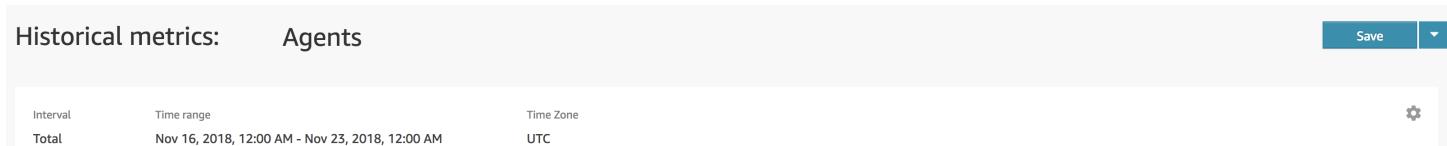

Set the report configuration by following the screenshots below:

Table Settings

X

Interval & Time range

Groupings

Filters

Metrics

Interval

30 Minutes

Time Zone

UTC

Time range

Last 24 hours

Table Settings

X

Interval & Time range

Groupings

Filters

Metrics

Select the values you'd like to group your metrics by, and add them to the right in the order you prefer.

Grouping options

Selected groupings (Maximum 5)

Agent Hierarchy Level One



Agent



Agent Hierarchy Level Two



2

Agent Hierarchy Level Three



3

Agent Hierarchy Level Four



4

Agent Hierarchy Level Five



5

Queue



Routing Profile



Phone Number



Optionally set the filters:

Table Settings



Interval & Time range

Groupings

Filters

Metrics

Queues that match these filters will be displayed on the table

Queue

Routing profile

Agent hierarchy

Phone number

Queue

Show metrics only for contacts handled in these queues:

Search



And most importantly, select the correct metrics in the last tab:

Table Settings

[Interval & Time range](#)[Groupings](#)[Filters](#)[Metrics](#)

Metrics are displayed to the right of grouping columns.

 Contact metrics Agent metrics Search[Metrics definitions](#) Agent Name Agent First Name Agent Last Name After contact work time Agent on contact time Agent idle time Non-Productive Time Average queue abandon time Average after contact work time Average queue answer time Average handle time Average customer hold time Average agent interaction and customer hold time Average agent interaction time Contacts abandoned Contacts abandoned in 15 seconds Contacts abandoned in 20 seconds Contacts abandoned in 25 seconds Contacts abandoned in 30 seconds Contacts abandoned in 45 seconds Contacts abandoned in 60 seconds Contacts abandoned in 90 seconds Contacts abandoned in 120 seconds Contacts abandoned in 180 seconds Contacts abandoned in 240 seconds Contacts abandoned in 300 seconds Contacts abandoned in 600 seconds Contacts agent hung up first Contacts consulted Contacts handled Contacts handled incoming


- | | |
|---|---|
| <input checked="" type="checkbox"/> Contacts handled outbound | <input type="checkbox"/> Callback contacts handled |
| <input type="checkbox"/> API contacts handled | <input checked="" type="checkbox"/> Contacts put on hold |
| <input checked="" type="checkbox"/> Contacts hold disconnect | <input checked="" type="checkbox"/> Contacts hold agent disconnect |
| <input checked="" type="checkbox"/> Contacts hold customer disconnect | <input type="checkbox"/> Contacts incoming |
| <input type="checkbox"/> Callback Contacts | <input type="checkbox"/> API Contacts |
| <input type="checkbox"/> Contacts answered in 15 seconds | <input type="checkbox"/> Contacts answered in 20 seconds |
| <input type="checkbox"/> Contacts answered in 25 seconds | <input type="checkbox"/> Contacts answered in 30 seconds |
| <input type="checkbox"/> Contacts answered in 45 seconds | <input type="checkbox"/> Contacts answered in 60 seconds |
| <input type="checkbox"/> Contacts answered in 90 seconds | <input type="checkbox"/> Contacts answered in 120 seconds |
| <input type="checkbox"/> Contacts answered in 180 seconds | <input type="checkbox"/> Contacts answered in 240 seconds |
| <input type="checkbox"/> Contacts answered in 300 seconds | <input type="checkbox"/> Contacts answered in 600 seconds |
| <input type="checkbox"/> Contacts queued | <input type="checkbox"/> Contacts transferred in |
| <input checked="" type="checkbox"/> Contacts transferred out | <input checked="" type="checkbox"/> Contacts transferred out internal |
| <input checked="" type="checkbox"/> Contacts transferred out external | <input type="checkbox"/> Contacts transferred in from queue |
| <input type="checkbox"/> Contacts transferred out from queue | <input checked="" type="checkbox"/> Error status time |

- | | |
|---|--|
| <input type="checkbox"/> Customer hold time | <input checked="" type="checkbox"/> Agent answer rate |
| <input type="checkbox"/> Maximum queued time | <input checked="" type="checkbox"/> Contacts missed |
| <input type="checkbox"/> Contact handle time | <input type="checkbox"/> Contact flow time |
| <input checked="" type="checkbox"/> Occupancy | <input type="checkbox"/> Service level 15 seconds |
| <input type="checkbox"/> Service level 20 seconds | <input type="checkbox"/> Service level 25 seconds |
| <input type="checkbox"/> Service level 30 seconds | <input type="checkbox"/> Service level 45 seconds |
| <input type="checkbox"/> Service level 60 seconds | <input type="checkbox"/> Service level 90 seconds |
| <input type="checkbox"/> Service level 120 seconds | <input type="checkbox"/> Service level 180 seconds |
| <input type="checkbox"/> Service level 240 seconds | <input type="checkbox"/> Service level 300 seconds |
| <input type="checkbox"/> Service level 600 seconds | <input checked="" type="checkbox"/> Online time |
| <input checked="" type="checkbox"/> Agent interaction and hold time | <input checked="" type="checkbox"/> Agent interaction time |
| <input checked="" type="checkbox"/> Average outbound agent interaction time | <input checked="" type="checkbox"/> Average outbound after contact work time |

[Cancel](#)

[Apply](#)

Once metrics are selected, click the Apply button. Next, click the drop-down arrow on the right-hand side and select Schedule.

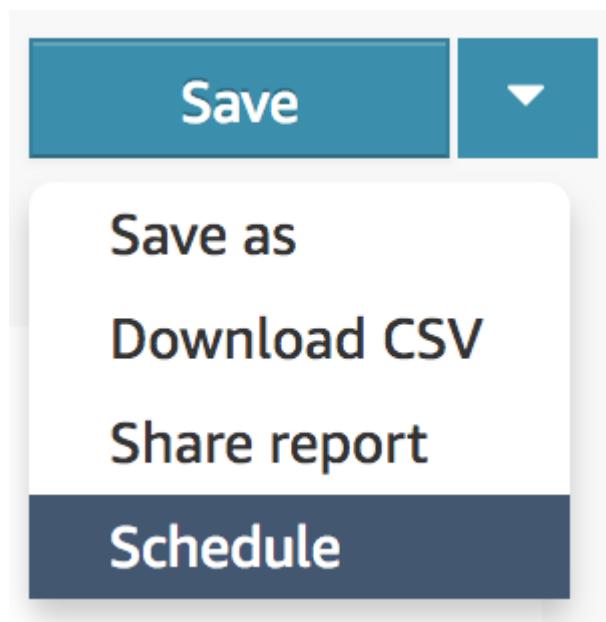

Set the report name, for instance `sfIntervalAgent` and click Continue

Schedule report

X

First, name your report.

Name `sfIntervalAgent`

Cancel

Continue

Schedule report

X

Note

Once you schedule a report, it will be published to your organization, and all individuals who have proper permissions will be able to access it.

Cancel

Continue

On the next screen, set Recurrence as:

Recurrence

Delivery Options

Generate this report

Hourly ▾ every 0.5 ▾ hour(s)

Starting at

Time zone

1 am ▾ UTC

For the previous

0.5 ▾ hour(s)

Switch to Delivery Options tab and set the Prefix as SFDC/Agent

Recurrence

Delivery Options

Default location

connect-627[REDACTED]12/connect/[REDACTED]-test8/Reports

Prefix

SFDC/Agent



Click the Create button to create the Schedule for the report. The report can be found in Metrics and quality > Saved Reports > Historical metrics



Metrics and quality



Real-time metrics



Historical metrics

Contact search

Login/Logout report

Saved reports

Dashboard

Real-time metrics

Historical metrics

Login/Logout report

Search by report name

Name

sflIntervalQueue

Schedule report

SfIntervalAgent



Click on the Clock (Schedule Report) icon to see the configuration. Please note the File name and the Path for the CSV file to be created.

Schedule 1

Repeats: HOURLY - runs every 0.5 hour(s), starting at 01:00 (UTC), for the previous 0.5 hour(s).

File name: connect-62[REDACTED]d2/connect/[REDACTED]-test8/Reports/SFDC/Agent/SfIntervalAgent-YYYY-MM-DDThh:mm:ssZ.csv

Next run: Friday, November 23, 2018 6:30:00 PM UTC

Last run: Friday, November 23, 2018 5:45:07 PM UTC

The Agent Interval report has been created and scheduled to export the data. After a while, you will be able to see CSV files in the S3 bucket.

Name	Last modified	Size	Storage class
SfIntervalAgent-2018-11-21T17:00:00Z.csv	Nov 21, 2018 5:15:08 PM GMT+0000	413.0 B	Standard
SfIntervalAgent-2018-11-21T17:30:00Z.csv	Nov 21, 2018 5:45:07 PM GMT+0000	413.0 B	Standard
SfIntervalAgent-2018-11-21T18:00:00Z.csv	Nov 21, 2018 6:15:11 PM GMT+0000	413.0 B	Standard

Amazon Connect Salesforce Lambda package (AWS Serverless Application Repository) deploys two Lambda functions to handle the reporting integration: *sfnIntervalQueue* and *sfnIntervalAgent*. In the next step, we are going to set Triggers for these functions.

From the AWS Console, select Lambda service and choose *sfnIntervalQueue* Lambda function. On the left-hand side, select S3 as a trigger.

Kinesis

S3

Add triggers from the list on the left

After the trigger is selected:

Kinesis

S3



We need to set the trigger configuration. Select the Bucket where the CSV files are stored (from the Filename in previous steps). Set Event type to PUT and set Prefix to the Queue path (from the Filename in previous steps). Click the Add button and Save the function.

Configure triggers

Bucket

Please select the S3 bucket that serves as the event source. The bucket must be in the same region as the function.

connect-62 d2

Event type

Select the events that you want to have trigger the Lambda function. You can optionally set up a prefix or suffix for an event. However, for each bucket, individual events cannot have multiple configurations with overlapping prefixes or suffixes that could match the same object key.

PUT

Prefix

Enter a single optional prefix to limit the notifications to objects with keys that start with matching characters.

connect/████████-test8/Reports/SFDC/Queue/

Suffix

Enter a single optional suffix to limit the notifications to objects with keys that end with matching characters.

e.g. .jpg

Lambda will add the necessary permissions for Amazon S3 to invoke your Lambda function from this trigger. [Learn more](#) about the Lambda permissions model.

Enable trigger

Enable the trigger now, or create it in a disabled state for testing (recommended).

Cancel

Add

The final configuration should look like this:

S3

connect-62 d2

arnaws3::connect-6278f407e9d2

Event type: ObjectCreatedByPut Notification name: caf30f0e-7111-404b-a881-4324cd62a503 Prefix: connect/ [REDACTED]-test8/Reports/SFDC/Queue/

Enabled Delete

This Lambda function transfers the Queue reporting data to your SFDC instance. Next, we have to repeat steps for Agent reporting Lambda function.

From the AWS Console, select Lambda service and choose *sflIntervalAgent* Lambda function. On the left-hand side, select S3 as a trigger.

Kinesis

S3

Add triggers from the list on the left

After the trigger is selected:

Kinesis

S3

S3 Configuration required

We need to set the trigger configuration. Select the Bucket where the CSV files are stored (from the Filename in previous steps). Set Event type to PUT and set Prefix to the Agent path (from the Filename in previous steps). Click the Add button and Save the function.

Configure triggers

Bucket

Please select the S3 bucket that serves as the event source. The bucket must be in the same region as the function.

connect-62 [REDACTED] d2

Event type

Select the events that you want to trigger the Lambda function. You can optionally set up a prefix or suffix for an event. However, for each bucket, individual events cannot have multiple configurations with overlapping prefixes or suffixes that could match the same object key.

PUT

Prefix

Enter a single optional prefix to limit the notifications to objects with keys that start with matching characters.

connect/[REDACTED]-test8/Reports/SFDC/Agent/

Suffix

Enter a single optional suffix to limit the notifications to objects with keys that end with matching characters.

e.g. .jpg

Lambda will add the necessary permissions for Amazon S3 to invoke your Lambda function from this trigger. [Learn more](#) about the Lambda permissions model.

Enable trigger

Enable the trigger now, or create it in a disabled state for testing (recommended).

Cancel

Add

The final configuration should look like this:

S3

connect-62

Event type: ObjectCreatedByPut Notification name: 6d7b80c0-e705-454d-9ae1-ec5cd63cd03d Prefix: connect/

Enabled Delete

This Lambda function transfers the Agent reporting data to your SFDC instance.

The Amazon Connect CTI Adapter comes with a predefined set of reports, which can be customized or additional reports can be created by leveraging the imported data. To see the list of built-in reports, login into your SFDC instance and open the App Launcher, then choose Reports.

App Launcher

Search apps or items...

Visit AppExchange

Service Manage customer service with accounts, contacts, cases, and more	Marketing Best-in-class on-demand marketing automation	Sample Console (Salesforce Classic) Lets agents work with multiple records o... ⓘ	Community Salesforce CRM Communities
Salesforce Chatter The Salesforce Chatter social network, including profiles and feeds	Content Salesforce CRM Content	Sales Console (Lightning Experience) Lets sales reps work with multiple rec... ⓘ	Service Console (Lightning Experience) Lets support agents work with multiple... ⓘ
Sales Manage your sales process with accounts, leads, opportunities, and more	Lightning Usage App View Adoption and Usage Metrics for Lightning Experience	Amazon Connect Toolkit Console Sample Salesforce Console application for the Amazon Connect ... ⓘ	

▼ All Items

Accounts	App Launcher	Approval Requests	Assets	Calendar
Campaigns	Cases	Chatter	Contacts	Contracts
Dashboards	Duplicate Record Sets	Email Templates	Files	Forecasts
Groups	Home	Leads	Lightning Bolt Solutions	Lightning Usage
List Emails	Live Agent Sessions	Live Chat Transcripts	Live Chat Visitors	Macros
Omni Supervisor	Opportunities	Orders	People	Price Books
Products	Quick Text	Reports	Scorecards	Streaming Channels
Tasks	User Provisioning Requests			

All Amazon Connect built-in reports are deployed in Amazon Connect Reports folder:

Reports

Recent

14 items

REPORTS	REPORT NAME	DESCRIPTION	FOLDER
Recent	Agent All Interval 30 Today		Amazon Connect Reports
Created by Me	Queue All Interval 30 Today		Amazon Connect Reports
Private Reports	Contacts Agent Hung Up First This ...		Amazon Connect Reports
Public Reports	Contacts Handled This Week		Amazon Connect Reports
All Reports	Contacts Queued This Week		Amazon Connect Reports
FOLDERS	Trend of Calls Abandoned This Week		Amazon Connect Reports
All Folders	Agent Service Level 60 Today		Amazon Connect Reports
Created by Me	Contacts Transferred In This Week		Amazon Connect Reports
Shared with Me	Contacts Transferred Out This Week		Amazon Connect Reports
FAVORITES	Contacts Handled Outbound This W...		Amazon Connect Reports
All Favorites	Contacts Handled Incoming/Outgoi...		Amazon Connect Reports
	Average Occupancy Today		Amazon Connect Reports
	Average Handle Time Today		Amazon Connect Reports
	Agent Answer Rate This Week		Amazon Connect Reports

To see the exact layout of imported data for Queue, select the Queue All Interval 30 Today report:

REPORT Queue All Interval 30 Today																		Switch to Enhanced Run Page (Beta)		C		Edit	
Total Records	1																						
STARTINTERVAL ↑	AC OBJECT NAME	AFTER CONTACT WORK TIME	AGENT ON CONTACT TIME	AGENT IDLE TIME	AVERAGE QUEUE ANSWER TIME	AVERAGE AFTER CONTACT WORK TIME	AVERAGE HANDLE TIME	AVERAGE CUSTOMER HOLD TIME	AVG AGENT INTERACTION AND CUST HOLD TIME	AVERAGE AGENT INTERACTION TIME	CONTACTS ABANDONED	CONTACTS ABANDONED IN 15 SECONDS	CONTACTS ABANDONED IN 20 SECONDS	CONTACTS ABANDONED IN 25 SECONDS	CONTACTS ABANDONED IN 30 SECONDS	CONTACTS ABANDONED IN 45 SECONDS	CONTACTS ABANDONED IN 60 SECONDS	CONTACTS ABANDONED IN 90 SECONDS	CONTACTS ABANDONED IN 120 SECONDS				
23/11/2018 16:00	BasicQueue	461	991	18	19	461	992	-	531	531	0	-	-	-	-	-	-	-	-	-	-		

To see the exact layout of imported data for Agent, select the Agent All Interval 30 Today report:

REPORT Agent All Interval 30 Today																		Switch to Enhanced Run Page (Beta)		C		Edit	
Total Records	1																						
STARTINTERVAL ↑	USER	AC OBJECT NAME	AFTER CONTACT WORK TIME	AGENT ON CONTACT TIME	AGENT IDLE TIME	NONPRODUCTIVE TIME	AVERAGE AFTER CONTACT WORK TIME	AVERAGE HANDLE TIME	AVERAGE CUSTOMER HOLD TIME	AVG AGENT INTERACTION AND CUST HOLD TIME	AVERAGE AGENT INTERACTION TIME	CONTACTS AGENT HUNG UP FIRST	CONTACTS CONSULTED	CONTACTS HANDLED	CONTACTS HANDLED INCOMING	CONTACTS HANDLED OUTBOUND	CONTACTS HOLD ON HOLD	CONTACTS HOLD DISCONNECT	CONTACTS HOLD AGENT DISCONNECT	CONTACTS HOLD CUSTOMER DISCONNECT			
23/11/2018 16:00	-	rncosic	461	991	18	-	461	992	-	531	531	1	-	1	1	0	0	0	0	0	0		

CTI Flows

The CTI Adapter provides a mechanism to customize the behavior of the adapter based on your business needs without needing to edit the underlying Visualforce pages, which could negatively impact overall adapter function. This is accomplished through CTI Flows.

A CTI Flow consist of "actions" that represent an API call to parts of Salesforce or Amazon Connect API. Like a JavaScript function, each action can take inputs and provide outputs, or returns values, that you

can use from other actions.

CTI Flows

New AC CTI Flow

No records to display

CTI Flow, go to your Adapter page and find a section called "CTI Flows."

AC CTI Flow Edit

Save Save & New Cancel

Information

CTI Flow Name	Create Screenpop	CTI Adapter	ACLightningAdapter
Source	Amazon Connect Voice Contact	Event	onConnecting
Description	A screenpop will be triggered when a new contact is created in Amazon Connect.		
		Active	<input checked="" type="checkbox"/>
		Debug	<input type="checkbox"/>

This will take you to a form where you can fill in name and adapter of the CTI Flow. There are a couple of fields that you may be unfamiliar with: "Source" and "Event."

CTI Flow Name
Source
Description

--None--
✓ Initialization
Amazon Connect Agent
Amazon Connect Voice Contact
Amazon Connect Queue Callback Contact
Amazon Connect Chat Contact
Salesforce Agent
Salesforce UI

You can think of Source as the "origin" of the CTI Flow. There are currently 7 sources: Initialization, an Agent on Connect, Voice Contact on Connect, Queue Callback Contact on Connect, Chat on Connect, Salesforce Agent or Salesforce UI.

Each source comes with a set of events that you can hook into, i.e. your CTI Flow will be executed when one of these events fire. Typically, you will have only one flow for a combination of a source and an event. (You can find out more about sources and events in Appendix A.)

For the purposes of this example, we selected "Amazon Connect Voice Contact" source and "onConnecting" event. Now click Save and on the next page scroll down till you find the "CTI Flow" section.



AC CTI Flow

Create Screenpop

AC CTI Flow Detail

[Edit](#)[Delete](#)[Clone](#)

▼ Information

CTI Flow Name Create Screenpop

Source Amazon Connect Voice Contact

Description

Created By Amazon Connect, 7/23/2020 9:10 AM


▼ CTI Flow

Main Menu

[Save](#)



[Download](#) [Upload](#)

Drag to stage



Let's build a CTI Flow that opens a screenpop in Salesforce when a voice call comes.

Drag to stage

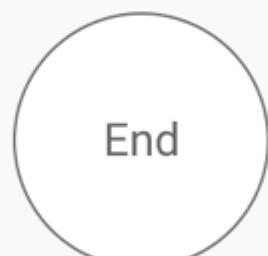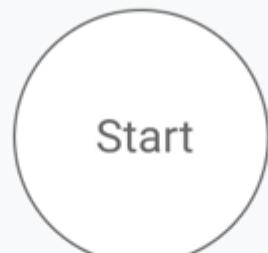

You can start using by dragging the item called "CTI Block" from the sidebar in the Main Menu over the stage, which is marked by a grid pattern.

When you drop the block, you will see a modal titled "Explorer." This modal contains a list of actions you can choose from.

Explorer

Search
 x

Categories
 ▼

Tags
 ▼

Showing 13 actions

[Save search](#)

[Searches \(Clear\)](#)

[phone](#)
[date](#)

Format Phone Number

Formats a phone number for a country code.

[Parameters >](#)

What it calls:

`ac.Utils.Common.formatPhoneNumber(...)`

[Select](#)

Format Phone Number (E164)

Formats a phone number for a country code in E164 format.

[Parameters >](#)

What it calls:

`ac.Utils.Common.formatPhoneNumberE164(...)`

[Select](#)

Get Softphone Layout

The query to get softphone layout.

What it calls:

`ac.Utils.Salesforce.getSoftphoneLayout()`

Show Softphone Panel

The command to show softphone panel.

What it calls:

`ac.Utils.Salesforce.showSoftphonePanel()`

In the "Search" field, search for "Phone" and Select the action called "Get Customer Phone Number" from the results on the right.

Change type ▾

Get Customer Phone Number


ID: uid-0

Remove About this action

Return Values

This action has a return value. It returns the following fields. You may use these fields in the input fields of connected actions.

phone	Phone number of the caller.
country	Country of the phone number.

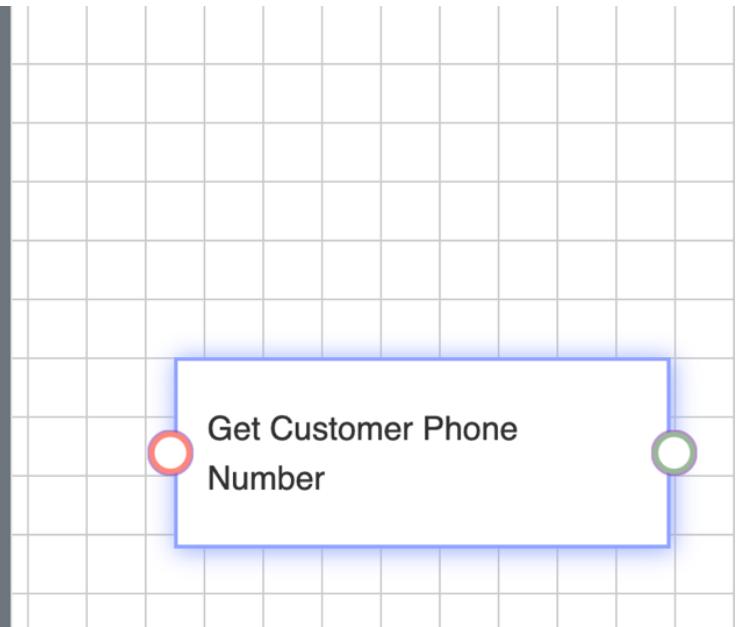

You should now see a block on the stage for the action you selected, and the sidebar will display some information about this action, including its return value.

Some actions can be configured using input fields to provide arguments to function calls, as well. This action does not have any input fields, and returns two values ---- "phone" and "country."

Now let's drag another CTI Block over the stage and find an action called "Search and Screenpop."

Change type ▾

Search And Screenpop

ID: uid-9

Remove About this action

Arguments

searchParams i

Enter a value


queryParams i

Enter a value

defaultFieldValues i

Add a field


deferred i

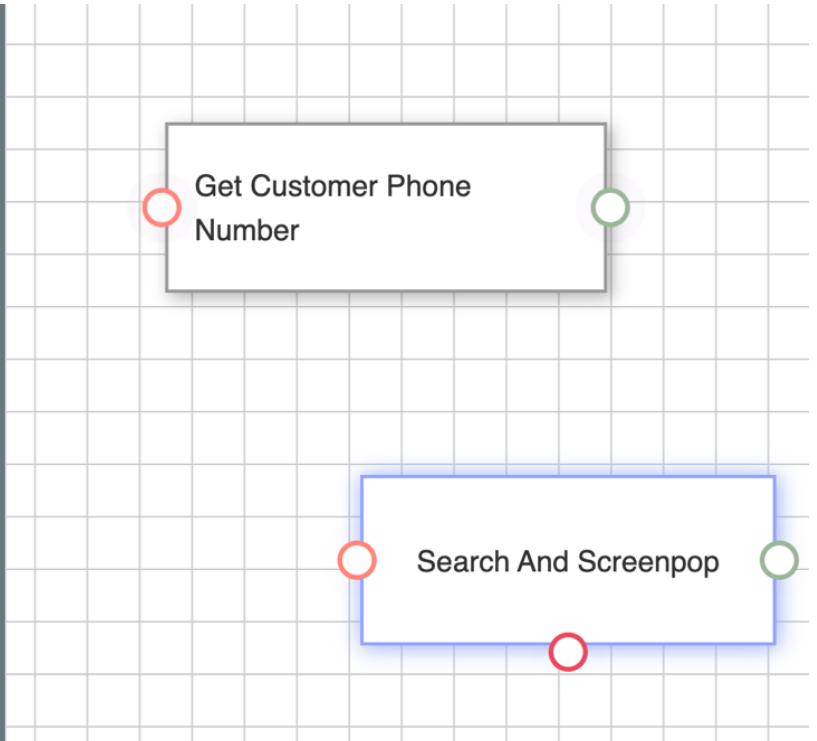

Connect these blocks by clicking the green socket (green means "done") on "Get Customer Phone," which will display a blue line that tracks your mouse cursor around the stage.

Now, click on the pink socket, i.e. the "input" socket, which is to the left of the "Search and Screenpop" block. If the connection is successful, the sockets turn into a solid color and the blue line will connect

them. (There are some restrictions on which sockets you can connect together. For example, you cannot connect output of an action to its own input socket or connect two inputs.) If you are not happy with this connection, you can hover over it and double click to remove.

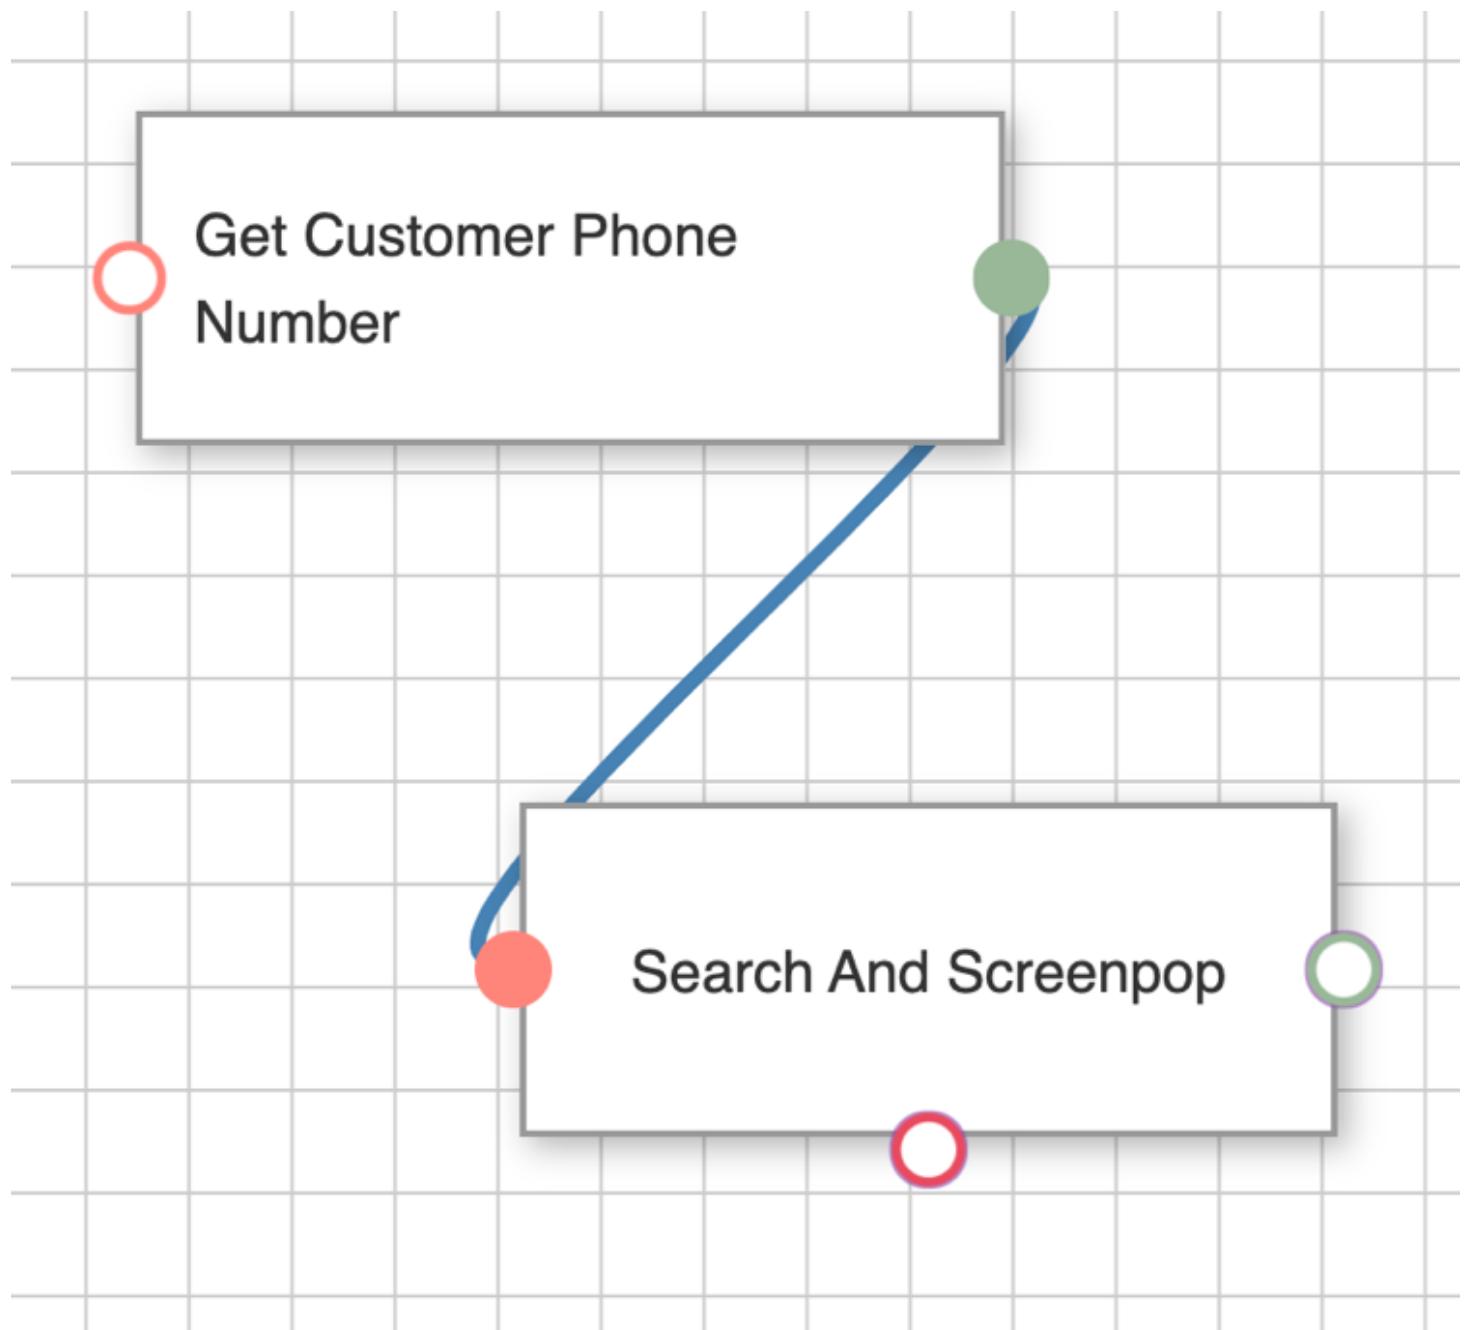

Now we'd like to get the phone number of the customer and use it in "Search and Screenpop." Here is a tip: if two actions are connected, you can use the return values of the first action in the input fields of the next action. (You can even use the return values of actions connected to the last action, and the ones connected to that, and so on.)

This action has only two options, and we want to use the one called "phone" for this field.

Change type ▾

Search And Screenpop

ID: uid-2

Remove

About this action

Arguments

searchParams

GET CUSTOMER PHONE NUMBER (UID-0)

phone

country

Add a field

deferred

callType

Search And Screenpop

ID: uid-9

Remove

About this action

Arguments

searchParams

ValueOf

queryParams

Add New Value


Add a field


deferred

callType

If you want to enter a custom input value, you can type that, and select "Add New Value" from the dropdown.

And make sure to set "callType" to "inbound." Finally, add the "Start" and "End" nodes and connect everything together.

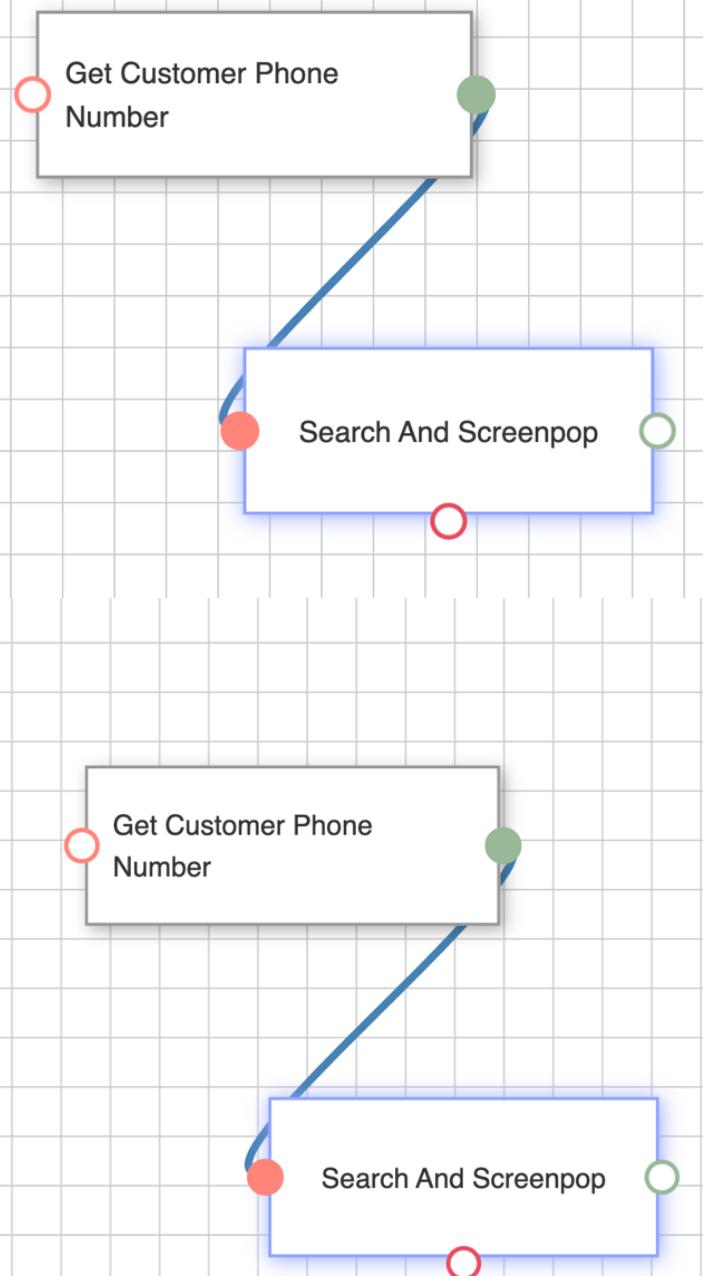

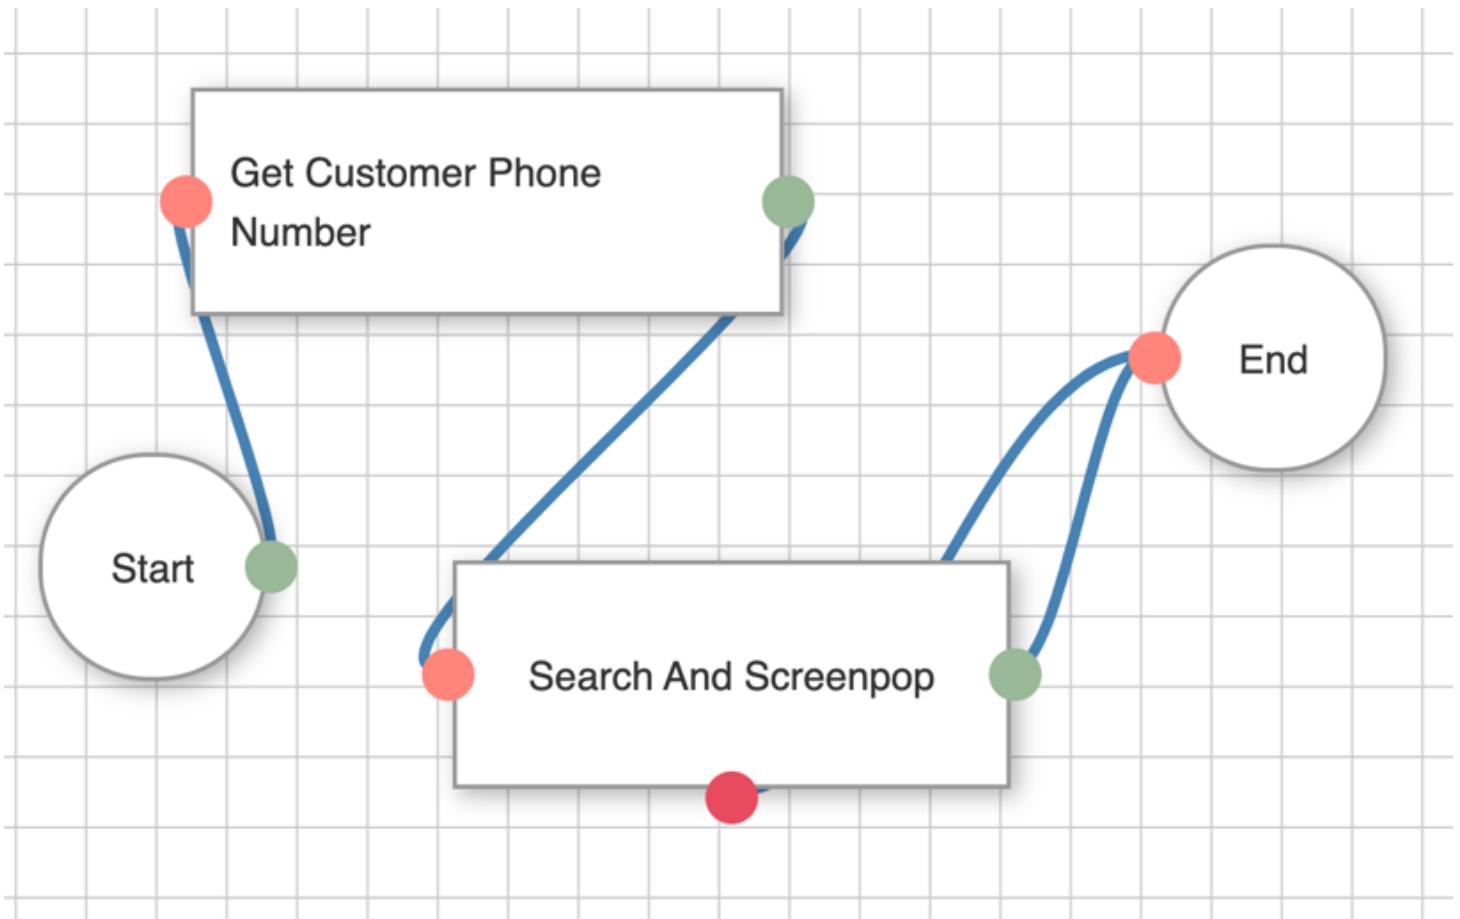

When you're finished, click "Save" in the sidebar. That's it. You created your first CTI Flow.

To test your flow, go to your Service Console, and make a call from a number that is in the profile of a Contact. As the call is displayed in your CCP dashboard, Salesforce will pop open the contact of the caller in a separate tab.

Localization

Prerequisites


CTI Adapter will use Translation Workbench to maintain translated values for metadata and data labels in your Salesforce org. In order for that to work, you need to enable Translation Workbench in your org.

1. From Setup, in the Quick Find box, enter Translation Language Settings, and then select Translation Language Settings.
2. On the welcome page, click Enable.

Setting your preferred language

Starting from v5.6, Amazon Connect Salesforce CTI adapter is localized in nine new languages: Spanish, French, Brazilian Portuguese, Korean, Italian, German, (Simplified/Traditional) Chinese, and Japanese.

Change the language by selecting the username in the top right corner, then click on "My Settings".

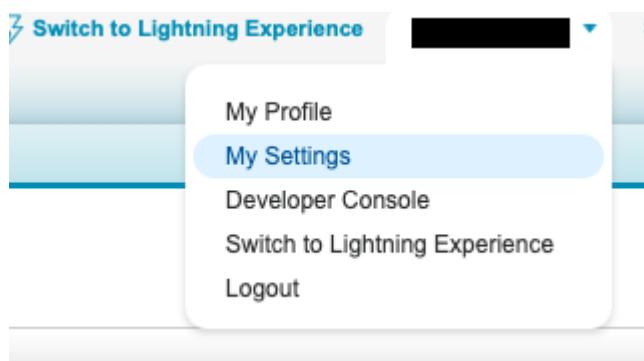

On the setting page on the left panel go to "Personal" and then select "Language & Time Zone".

A screenshot of the 'My Settings' page in the Salesforce interface. At the top is a 'Quick Find' search bar with a magnifying glass icon. Below it is a header 'My Settings'. Underneath is a sidebar with a blue profile icon and the text 'Personal'. The sidebar contains ten items: 'Personal Information', 'Change My Password', 'Language & Time Zone' (which is highlighted with a grey background), 'Grant Account Login Access', 'My Groups', 'Reset My Security Token', 'Connections', 'Login History', 'Approver Settings', and 'Advanced User Details'. The main content area is currently empty.

You can then select your preferred language. Note that CTI adapter only have nine languages built within the package.

Language & Time Zone

Settings

Time Zone (GMT-07:00) Pacific Daylight Time (America/Los_Angeles) ▾

Locale English (United States) ▾ i

Language

Email Encoding Europe (ISO-8859-1, ISO-LATIN-1) ▾ i

Save Cancel

- ✓ English
- Deutsch
- Español
- Français
- Italiano
- 日本語
- Svenska
- 한국어
- 中文 (繁體)
- 中文 (简体)
- Português (Brasil)
- Nederlands
- Dansk
- ภาษาไทย
- Suomi
- Русский
- Español (México)
- Norsk (bokmål)

Click save and the page will reload. That's it. You can check in other pages to see if it actually applies your change. For example here is a screenshot of CTI Flow Editor in Spanish.

Explorer

**Buscar** **Categorías** **Etiquetas**

Mostrar 100 acciones

[Guardar búsqueda](#)**If-else**

Cambie el flujo del script en función del valor de los campos que obtenga o almacene. Se trata de una utilidad "if-else" sencilla para el flujo.

[Parámetros >](#)**Qué llama:**


```
ac.Utils.Common.decision(..  
.)
```

[Seleccionar](#)**CoreCast**

Cast an input value to a Javascript type, such as Number or String.

[Parámetros >](#)[Seleccionar](#)**Solicitud HTTP****Obtener la propiedad**

Click on Phone pannel on the bottom to see if CCP has been localized. If not right click on CCP and reload.

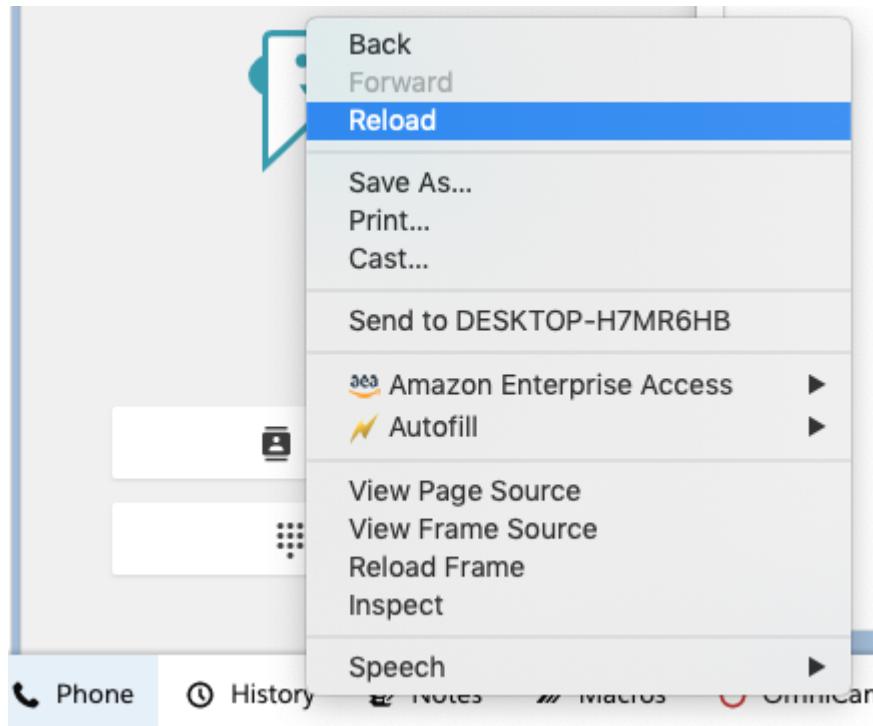

Additional Notes

Please note that not all fields can be localized to different languages due to a couple reasons. Here are places that cannot be localized:

- Dashboard. Salesforce dashboards do not support localization.
- Flexipages. This means the page with tabs that you can find in AC CTI Adapter page in lightning.

Attributes	CTI Flows	Presence Sync Rules	Features
 Attributes (0)			

- Reports. This is a missing functionality in Salesforce.

CTI Actions

Customers can now extend their Contact Control Panel (CCP) with customizable buttons called CTI Actions. These buttons can be configured in Salesforce and used to simplify common agent actions. For example, you can add a button that transfers calls to a manager, start and stop recordings, automate case creation, or start a customer refund process. CTI Actions are configured in the CTI Adapter's Actions Admin panel to execute [CTI Flows](#) which are process blocks that enable you to easily design agent workflows within our Salesforce integration.

You can configure a CTI Action in the CCP Element Editor page.

The screenshot shows the CCP Element Editor interface with the title 'CCP Element Editor' at the top. Below it, there's a section titled 'Actions' with three steps: 'Step 1: Name and Flow', 'Step 2: Payload (optional)', and 'Step 3: Additional Data (optional)'. Step 1 is active, showing a 'Save' button and other options like 'Quick Save', 'Delete', and 'Cancel'. A note says: 'This section asks you for some required information about your action. It is the only required section you need to fill to create an action.' Below this, there are input fields for 'Action Name' (containing 'Leave Voicemail'), 'The name agents will see.', 'CTI Flow' (containing 'Leave a Voicemail'), and 'Order' (containing '0'). A note next to the CTI Flow field says: 'In this field, you will see all CTI Flows in this account whose source field is CCP Overlay.'

Make sure that you have created a CTI Flow and it uses the source "CTI Action." Only these CTI Flows will be displayed in the dropdown field.

You can optionally specify a payload to pass to the CTI Flow. This allows your agents to enter additional data about the customer or information about the call to pass into the CTI Flow. The CCP Element Editor gives you the ability to add input fields into your form.

Actions

Step 1: Name and Flow	Save Quick Save Delete Cancel
Step 2: Payload (optional)	In this section, you will build a form that will be displayed to the agents prior to triggering the CTI Flow. The form data will be passed as a payload to the executed flow.
Step 3: Additional Data (optional)	Overview Form fields New field +

This section collects some basic information about the form, such as title and instructions. Both fields are optional.

(optional)

Title
Enter a short title for the form.

(optional)

Instructions
Enter a few lines about how to fill out this form.

Form fields ▶

Actions

Step 1: Name and Flow	Save Quick Save Delete Cancel
Step 2: Payload (optional)	In this section, you will build a form that will be displayed to the agents prior to triggering the CTI Flow. The form data will be passed as a payload to the executed flow.
Step 3: Additional Data (optional)	Overview Form fields New field +

Field Name
This is the name of the field in your payload. It should be a camelCased word.

Label
The label is a human readable text shown to the agent next to the input field.

Field Type Text **Order** 0
You have the option to select a text input or a dropdown.


Field Required

Cancel **Finish**

◀ Overview

CCP Overlay

The **Actions** panel in the CCP overlay drawer displays the CTI Action buttons where your agents have easy access to them as they are interacting with customers.

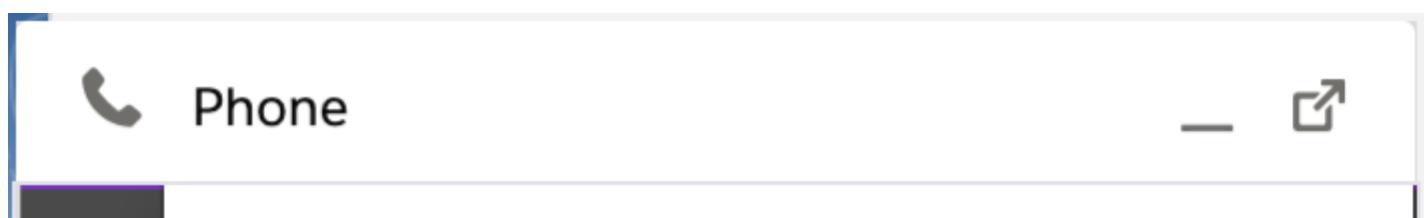

Attributes	Actions
Send Customer Giftcard	▶
Activate Customer Account	<button>Execute</button>
Transfer to Manager	<button>Execute</button>
Give customer refund	<button>Execute</button>
Open a Case	<button>Execute</button>
➤ Find Cases for Customer	<button>Execute</button>
Create Task and Contact and Screenpop	<button>Execute</button>
VIP	<button>Execute</button>
Transfer to Manager	<button>Execute</button>
Transfer to Peer	<button>Execute</button>

If a CTI Action requires additional input by the agent, its name will be followed by an arrow and when the agent clicks on this button, it will open the configured form. Otherwise, it will be shown with an "Execute"

button next to its name.



Phone



Attributes

Actions



Go back

Customer Gift Card

Please fill in these details about the user.

First name*

John



Last name*

Doe

Telephone

Submit

Receiving Data from CTI Flows

In addition to agents sending data to the CTI Flow, they can also receive data from a CTI Flow.. When a CTI Flow sends some information to the CCP overlay, it will be displayed in the Data panel.



Phone



Attributes

Data



+1 3

Data Sink

foo

bar



Here is how you would configure your CTI Flow to send data back to the CCP overlay.

Send Data to CCP Overlay


ID: uid-9 ⓘ

Arguments

value ⓘ optional

foo bar ⚡

Add a field

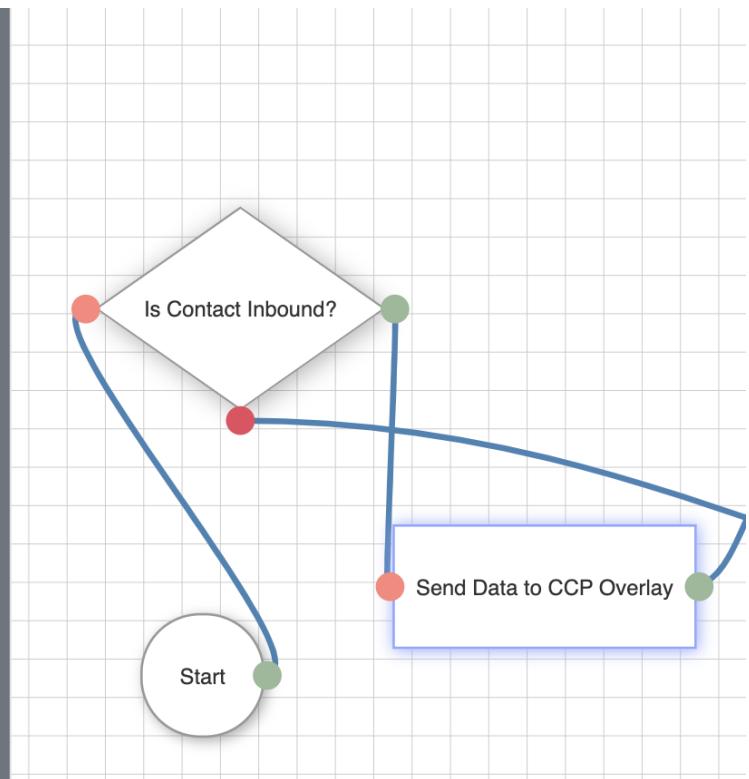

Upgrading from an earlier version

If you are upgrading the Salesforce package from an earlier version of CTI Adapter, there are a few additional steps to follow:

1. Go to Setup
2. In "Quick Find," search for "Picklist Value Sets" and click on the result.
3. Select "AC_CtiScriptSource" on "Picklist Value Sets" page.
4. Scroll down to "Values" section
5. Click "New" to add a new value.
6. In the textarea, enter "ctiAction" and save
7. Scroll down to the new field you added, "ctiAction," and click "Edit."
8. Update the label to "CTI Action" and save.

Recording Controls

Recording Controls panel in the CCP Overlay allows your agents to control the recording behavior of the call.





Start recording

Pause recording



This panel integrates to Amazon Connect [call recording API](#). To use it, make sure to add [Set recording behavior block](#) in your Contact Flow. The controls will be activated during a call.

This can be useful when you don't want to record every call, and give the agent the ability to pause and resume a recording.

Note that once a recording is stopped, it cannot be restarted. After starting a recording, you should use pause/resume button to control it.

This panel is disabled by default. You can enable it by adding `FEATURE_RECORDING_PANEL` feature flag to your CTI Adapter, with the setting `Enabled:true`.

Setup

First, create an IAM user and give it the managed policy `AmazonConnect_FullAccess`. (Make sure to create this in the same AWS account as the one that owns your Connect instance.)

The screenshot shows the AWS IAM console with the "Permissions" tab selected. Below it, a section titled "Permissions policies (1 policy applied)" is expanded, revealing a blue "Add permissions" button. A table lists a single policy:

Policy name	Attached directly
▼	AmazonConnect_FullAccess

Copy the access key and secret of this user (from the "Security credentials" tab.) Next, go to your Salesforce instance Setup section. Search for Named Credentials in the left sidebar, and create a new credential named `AmazonConnectAPI`. (The name and the label should be identical.)

Named Credential Edit: AmazonConnectAPI

Specify the callout endpoint's URL and the authentication settings that are required for

The screenshot shows the 'Named Credential Edit' interface for 'AmazonConnectAPI'. At the top right are 'Save' and 'Cancel' buttons. Below them are three fields: 'Label' (set to 'AmazonConnectAPI'), 'Name' (set to 'AmazonConnectAPI'), and 'URL' (set to 'https://connect.us-east-1.amazonaws.com'). A section titled 'Authentication' is expanded, showing fields for 'Certificate' (empty), 'Identity Type' (set to 'Named Principal'), 'Authentication Protocol' (set to 'AWS Signature Version 4'), 'AWS Access Key ID' (set to 'AKIAUYVLTXECVPVW5'), 'AWS Secret Access Key' (redacted), 'AWS Region' (set to 'us-east-1'), and 'AWS Service' (set to 'connect').

Label	AmazonConnectAPI
Name	AmazonConnectAPI
URL	https://connect.us-east-1.amazonaws.com
Authentication	
Certificate	[Empty]
Identity Type	Named Principal
Authentication Protocol	AWS Signature Version 4
AWS Access Key ID	AKIAUYVLTXECVPVW5
AWS Secret Access Key	[Redacted]
AWS Region	us-east-1
AWS Service	connect

Fill in `https://connect.us-east-1.amazonaws.com` as the url. For Identity Type, select "Named Principal" and for "Authentication Protocol" select "AWS Signature Version 4." Then fill in the "AWS Access Key Id" and "AWS Access Secret" fields with your IAM user credentials. And for AWS Region, use the region of your Connect instance. And for the AWS Service, fill in `connect`.

Invoking the Amazon Connect Salesforce Lambda in a Contact Flow

The Amazon Connect Contact Flow defines the routing behaviour within Amazon Connect, allowing contact center administrators to customize call flow behaviour such as playing prompts, invoking Lambda functions for data lookup, and sending the call to different queues based on various conditions. As a result, Contact Flows are expected to be highly customized for each organization. While the Adapter package does not provide any Contact Flows, there are some best practices that are worth highlighting when utilizing the Adapter.

The key element that enables Contact Flow integration is the AWS Lambda function. A Lambda function is a serverless piece of code that is invoked by the Contact Flow. Typically, Lambda functions are used to update or retrieve information from databases or APIs, as well as integrating with other systems. Lambda function can return any data processed to the Contact Flow where it can be used for decision making.

Since Salesforce is highly customizable, the same Salesforce object in a different environment may have different fields associated with it. As a result, we can expect objects to have different requirements for how they are retrieved, updated and created. The CTI Adapter was built to be able to query Salesforce objects regardless of how they have been customized. The user of the Adapter must therefore ensure they are passing the appropriate parameters to the Lambda functions provided as part of the Adapter.

The Lambda function supports different operations, based on the mandatory input parameter "sf_operation".

Salesforce Lookup

This operation is invoked by setting "sf_operation" to "lookup". In this case, the Lambda function queries Salesforce for objects based on the parameters passed to it.

- "**sf_object**" parameter contains Salesforce Object, like Case, Contact etc.
- "**sf_fields**" parameter contains a set of fields to be returned in a result. For example, if we are querying Case, we might specify "Id, IsClosed, Subject", or if we are querying Contact, we might specify "Id, Name, Email"
- Specify a conditional parameter, for example "CaseNumber" or "homephone". Multiple values may be sent and they will be applied with "AND" operator.

In the Amazon Connect Contact Flow Designer, add *Integrate > Invoke AWS Lambda function* block. Set 'sflnvokeAPI' Lambda ARN and make sure you have granted Amazon Connect to invoke the Lambda Function.

Example for phone number lookup:

X

Invoke AWS Lambda function

Makes a call to AWS Lambda, and optionally returns key / value pairs.

The returned key value pairs can be used to set contact attributes.

Function ARN

arn:aws:lambda:us-east-1:680944752362:function:aws-ser

Function input parameters

Use text X

Destination key

sf_operation

Value

lookup

Use text X

Destination key

sf_object

Value

Contact

Use text

X

Destination key

sf_fields

Value

Id, Name

Use attribute

Destination key

homephone

Type

System

Attribute

Customer Number

A result example:

```
"ExternalResults": {  
    "Id": "0031r000026MVP1AA4",  
    "sf_count": "1",  
    "Name": "Milos Cosic"  
}
```

Example for Case lookup:

X

Invoke AWS Lambda function

Makes a call to AWS Lambda, and optionally returns key / value pairs.

The returned key value pairs can be used to set contact attributes.

Function ARN

2362:function:aws-serverless-repository-AmazonConnec-s

Function input parameters

X

Use text

Destination key

sf_operation

Value

lookup

X

Use text

Destination key

sf_object

Value

Case

The screenshot shows two configuration panels side-by-side.

Top Panel:

- Destination key:** sf_fields
- Value:** Id, IsClosed, Subject

Bottom Panel:

- Use text** (radio button) is selected.
- Destination key:** CaseNumber
- Type:** System (selected from a dropdown)
- Attribute:** Stored customer input (selected from a dropdown)

A result example:

```
"ExternalResults": {
    "Id": "5001r000023QcAcAAK",
    "IsClosed": "true",
    "sf_count": "1",
    "Subject": "Amazon Connect Case"
}
```

Salesforce Create

This operation is invoked by setting "sf_operation" to "create". In this case, the Lambda function creates a Salesforce object based on the parameters passed to it.

- "**sf_object**" parameter contains Salesforce to be created, like Case.
- Specify additional parameters for the Salesforce object to be created. Please be sure to include all parameters required to create the Salesforce object.

In the Amazon Connect Contact Flow Designer, add *Integrate > Invoke AWS Lambda function* block. Set 'sflnvokeAPI' Lambda ARN and make sure you have granted Amazon Connect to invoke the Lambda Function.

An example for Case creation:

Invoke AWS Lambda function

X

Makes a call to AWS Lambda, and optionally returns key / value pairs.

The returned key value pairs can be used to set contact attributes.

Function ARN

erless-repository-AmazonConhec-sfInvokeAPI-2R3T34AMG

Function input parameters

• Use text X

Destination key
sf_operation

Value
create

• Use text X

Destination key
sf_object

Value
Case

• Use text X

Destination key
Origin

Value
Phone

Use text X

Destination key
Status

Value
New

Use text X

Use attribute X

Destination key
ContactId

Type
External

Attribute
Id

Contact Id is usually received as a result of a previous phone lookup, but it can be also stored as an Attribute (i.e. sf_contact_id)

Use text X

Destination key
Subject

Value
Amazon Connect Case

Use text X

Destination key
Priority

Value
Low

A result example (providing the newly created Case Id):

```
"ExternalResults": {  
    "Id": "5001r000023QfhPAAS"  
},
```

Salesforce Update

This operation is invoked by setting "sf_operation" to "update". In this case, the Lambda function updates a Salesforce object based on the parameters passed to it.

- "**sf_object**" parameter contains Salesforce to be updated, like Case.
- Specify additional parameters for the Salesforce object to be created. Parameters must include `sf_object` and `sf_id`.

In the Amazon Connect Contact Flow Designer, add *Integrate > Invoke AWS Lambda function* block. Set 'sfInvokeAPI' Lambda ARN and make sure you have granted Amazon Connect to invoke the Lambda Function.

An example for Case update:

X

Invoke AWS Lambda function

Makes a call to AWS Lambda, and optionally returns key / value pairs.

The returned key value pairs can be used to set contact attributes.

Function ARN

752362:function:aws-serverless-repository-AmazonConnec

Function input parameters

Use text X

Destination key

sf_operation

Value

update

Use text X

Destination key

sf_object

Value

Case

Use attribute

Destination key

sf_id


Type

External

Attribute

Id

Case Id is usually received as a result of a previous case lookup, but it can be also stored as an Attribute (i.e. sf_case_id)

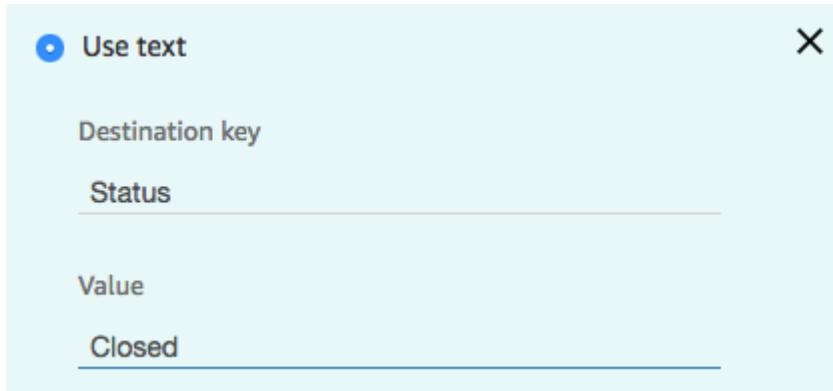

A result example (HTTP Status Code):

```
"ExternalResults": {  
    "Status": "204"
```

204 is "No Content" success code

Salesforce Phone Lookup

This operation is invoked by setting "sf_operation" to "phoneLookup". In this case, the Lambda function queries Salesforce for Contacts based on the parameter passed to it.

It uses the Salesforce Object Search Language (SOLS) to construct text-based search queries against the search index, which gives significant performance improvement when searching phone number fields.

- "**sf_phone**" parameter contains the phone number to search.
- "**sf_fields**" parameter contains a set of fields to be returned in a result. As it searches for Contacts, we might specify "Id, Name, Email"

In the Amazon Connect Contact Flow Designer, add *Integrate > Invoke AWS Lambda function* block. Set 'sfInvokeAPI' Lambda ARN and make sure you have granted Amazon Connect to invoke the Lambda Function.

Example for phone number lookup:

Invoke AWS Lambda function

X

Makes a call to AWS Lambda, and optionally returns key / value pairs.

The returned key value pairs can be used to set contact attributes.

Function ARN

serverless-repository-AmazonConnec-sfInvokeAPI-2R3T34AMG

Function input parameters

Use text X

Destination key

sf_operation

Value

phoneLookup

Use text X

Destination key

sf_fields

Value

Id, Name

Use attribute X

Destination key

sf_phone

Type

System

Attribute

Customer Number

A result example:

```
"ExternalResults": {  
    "Id": "0031r000026MVPPIAA4",  
    "sf_count": "1",  
    "Name": "Milos Cosic"  
}
```

Salesforce query

This operation is invoked by setting "sf_operation" to "query". In this case, the Lambda function uses Salesforce Object Query Language (SOQL) to conduct a query against the Salesforce instance.

- "query" parameter contains the query.

Any additional parameters will replace text values in the original query so that queries can be dynamic based on values stored within the contact flow. For example, the parameter set:

- query: "select field from object"
- field: "Id"
- object: "Task"

Will result in the query: "select Id from Task".

Function input parameters

Use text X

Destination key	Value
<u>sf_operation</u>	<u>query</u>

Use attribute

In the contact flow example below, we look for a customer by phone number.

Use text

X

 Use attribute

Destination key

number

Type

System



Attribute

Customer Number



(full text of the value is "select Id from Contact where Phone LIKE '%number%'")

 Use text

X

Destination key

query

Value

select Id from Contact where Phone LIKE '%numl Use attribute

This operation returns a response of:

{

```
"sf_records": [
    {
        "Id": "00303000001RZfIAAW"
    }
],
"sf_count": "1"
}
```

Salesforce queryOne

This operation is invoked by setting "sf_operation" to "queryOne" (case sensitive). In this case, the Lambda function uses Salesforce Object Query Language (SOQL) to conduct a query against the Salesforce instance, returning a result only when one record is returned from the query. For query, the following parameter is required:

- "**query**" parameter contains the query.

Any additional parameters will replace text values in the original query so that queries can be dynamic based on values stored within the contact flow. For example, the parameter set:

- query: "select field from object"
- field: "Id"
- object: "Task"

Will result in the query: "select Id from Task".

In the contact flow example below, we look for a customer by phone number.

Function input parameters

Use text

X

Destination key

sf_operation

Value

query

Use attribute

(full text of the value is "select Id from Contact where Phone LIKE '\%number%\''")

Use text

Destination key

query

Value

select Id from Contact where Phone LIKE '%numl

 Use attribute Use text Use attribute

Destination key

number

Type

System



Attribute

Customer Number



This operation returns a response of:

```
{  
  "sf_records": [  
    {
```

```
        "Id": "00303000001RZfIAAw"  
    }  
],  
"sf_count": "1"  
}
```

Salesforce createChatterPost

This operation is invoked by setting "sf_operation" to "createChatterPost" (case sensitive). In this case, the Lambda function uses the Salesforce Connect REST API to create a chatter post (see [here](#)). For createChatterPost, the following parameters are required:

- sf_feedElementType
- sf_subjectId
- sf_messageType
- sf_message

The following parameter is optional:

- sf_mention

(refer to the api reference for value types)

Any additional parameters will replace text values in the sf_message so that messages can be dynamic based on values stored within the contact flow. For example, the parameter set:

- sf_message: "Please help me with case {{caseld}}"
- caseld: 1234

Will result in the message: "Please help me with case 1234".

In the contact flow example below, we leave a chatter post on a contact.

Use text



Destination key

sf_operation

Value

createChatterPost

Use attribute

Use text



Destination key

sf_feedElementType

Value

FeedItem

Use attribute

Use text



Destination key

sf_subjectId

Value

00303000001RZflAAW

Use attribute

Use text X

Destination key

sf_messageType

Value

Text

Use attribute

Use text



Use attribute

Destination key

contactId

Type

System



Attribute

Contact id



Use text



Destination key

sf_message

Value

I had a problem during the call. My contact id is {{

Use attribute

(full text of the value is "I had a problem during the call. My contact id is {{contactId}}.")

The operation returns a response of:

```
{
```

```
"Id": "0D503000000ILY5CA0"
```

```
}
```



apiuser



I had a problem during the call. My contact id is dda99fbf-6186-4125-ba59-c461d620fdbd.

[Comment](#) · [Like](#) · Today at 3:45 PM via Amazon Connect Integration

the Subject:

Salesforce createChatterComment

This operation is invoked by setting "sf_operation" to "createChatterComment" (case sensitive). In this case, the Lambda function uses the Salesforce Connect REST to create a chatter comment (see [here](#)). For createChatterComment, the following parameters are required:

- sf_feedElementId
- sf_commentType
- sf_commentMessage

(refer to the api reference for value types)

Any additional parameters will replace text values in the sf_commentMessage so that messages can be dynamic based on values stored within the contact flow. For example, the parameter set:

- sf_commentMessage: "Please help me with case {{ caseld }}"
- caseld: 1234

In the contact flow example below, we leave a comment on a chatter post.

Use text



Destination key

sf_operation

Value

createChatterComment

Use attribute

Use text



Destination key

sf_feedElementId

Value

0D503000000ILY5CAO

Use attribute



Use text

Destination key

sf_commentType

Value

Text

Use attribute

Use text X

Destination key

sf_message

Value

This concern has been addressed.

Use attribute

The operation returns a response of:

```
{  
    "Id": "0D703000000ChhNCAS"  
}
```

See the chatter post appear attached to the Subject:



apiuser

I had a problem during the call. My contact id is dda99fbf-6186-4125-ba59-c461d620fdbd.

[Comment](#) · [Like](#) · Today at 3:45 PM via Amazon Connect Integration



apiuser

This concern has been addressed.

[Like](#) · Today at 3:53 PM via Amazon Connect Integration

Write a comment...

Salesforce search

This operation is invoked by setting "sf_operation" to "search" (case sensitive). In this case, the Lambda function uses the Salesforce REST to perform a parameterized search (see [here](#)). For search, the following parameters are required:

- q
- sf_fields
- sf_object

The following parameters are optional:

- where
- overallLimit

See the below example:

Use text X

Destination key
sf_operation

Value
search

Use attribute

Use text

X

Destination key

q

Value

test

Use attribute

59

Use text

X

Destination key

sf_object

Value

Case

Use attribute

60

Use text



Destination key

sf_fields

Value

Subject, Status

Use attribute

61

Use text



Destination key

overallLimit

Value

3

Use attribute

62

Use text



Destination key

where

Value

Status like 'New'

Use attribute

63

The operation returns a response of:

```
{  
    "sf_records": [  
        {  
            "Id": "50001000001B9e6AAG",  
            "Subject": "test subject",  
            "Status": "New"  
        },  
        {  
            "Id": "50001000001B9eWAAS",  
            "Subject": "test subject",  
            "Status": "New"  
        },  
        {  
            "Id": "50001000001BDgiAAG",  
            "Subject": "test subject",  
            "Status": "New"  
        }  
    ],  
    "sf_count": 3  
}
```

Salesforce searchOne

This operation is invoked by setting "sf_operation" to "searchOne" (case sensitive). In this case, the Lambda function uses the Salesforce REST API to perform a parameterized search (see [here](#)). For search, the following parameters are required:

- q
- sf_fields
- sf_object

The following parameter is optional:

- where

See the below example:

Use text



Destination key

sf_operation

Value

searchOne

Use attribute

Use text



Destination key

q

Value

test subject unique

Use attribute

Use text



Destination key

sf_object

Value

Case

Use attribute

Use text



Destination key

sf_fields

Value

Subject, Status

Use attribute

Use text

X

Destination key

overallLimit

Value

3

 Use attribute Use text

X

Destination key

where

Value

Status like 'New'

 Use attribute

The operation returns a response of:

```
{  
  "Id": "50001000001BIn6AAG",  
  "Subject": "test subject unique",  
  "Status": "New",  
  "sf_count": 1  
}
```

Appendix A: CTI Flow Sources and Events

The following sources are defined in the adapter for use with CTI Scripts:

- Initialization
 - onInit -- The CTI adapter has initialized.
- Amazon Connect Agent
 - onRefresh -- The Connect agent's data was updated.
 - onStateChange -- The Connect agent's state changed.
 - onRoutable -- The Connect agent became available for contacts.
 - onNotRoutable -- The Connect agent became unavailable for contacts.
 - onOffline -- The Connect agent's state was set to "Offline".
 - onError -- The Connect agent encountered a system error.
 - onAfterCallWork -- The Connect agent entered "After Call Work".
 - onInit -- The Connect agent has logged in.
- Amazon Connect Voice Contact
 - onIncoming -- The voice contact is incoming. Note: This event fires for queued callback contact only.
 - onConnecting -- The voice contact is connecting. Note: This event fires for inbound and outbound contacts except queued callback contacts.
 - onConnected -- The voice contact is connected.
 - onEnded -- The voice contact is ended or destroyed.
 - onRefresh -- The voice contact is updated.
 - onAccepted -- A voice contact is accepted.

- onPending -- The voice contact is pending.
 - onMissed -- The voice contact is / was missed.
 - onDestroy - The voice contact is destroyed.
- Amazon Connect Chat Contact
 - onConnecting -- The chat contact is connecting.
 - onConnected -- The chat contact is connected.
 - onEnded -- The chat contact ended.
 - onRefresh -- The chat contact is updated.
 - onAccepted -- The chat contact is accepted.
 - onPending -- The chat contact is pending.
 - onMessageReceived -- A message was received from the customer
 - onMessageSent -- A message was sent to the customer
 - onMissed -- The chat contact was missed.
 - onDestroy - The voice contact is destroyed.
- Amazon Connect Task Contact
 - onIncoming -- The tasks contact is incoming.
 - onConnecting -- The task contact is connecting.
 - onConnected -- The task contact is connected.
 - onEnded -- The task contact ended.
 - onRefresh -- The task contact is updated.
 - onAccepted -- The task contact is accepted.
 - onPending -- The voice contact is pending.
 - onMissed -- The task contact was missed.

- onDestroy - The voice contact is destroyed.
 - onTransferInitiated -- When the server has initiated the task transfer.
 - onTransferSucceeded -- When the task transfer has succeeded.
 - onTransferFailed -- When the task transfer has failed.
 - onTaskExpiring -- Triggers 2 hours before the task expires.
 - onTaskExpired -- When the task has expired.
- Salesforce Agent
 - onStateChange -- The Salesforce agent's state changed.
 - onWorkAccepted -- The Salesforce agent accepted work.
 - onWorkloadChanged -- The Salesforce agent's workload changed.
 - Salesforce UI
 - onClickToDial -- A phone number, within the Salesforce UI, was clicked.
 - onNavigationChange
 - onHvsWorkStart

Appendix B: Configuring Salesforce as Your Identity Provider

Amazon Connect supports Security Assertion Markup Language (SAML 2.0) to enable single sign on(SSO). Salesforce can act as a single sign on identity provider to service providers, allowing end users to easily and securely access many web and mobile applications with one login. By establishing the SSO integration between Amazon Connect and Salesforce, you will be able to seamlessly login to Salesforce and the same credentials will be used to auto-login to Amazon Connect.

Configuration

Prerequisites

To complete the SSO integration between Salesforce and Amazon Connect, you need:

1. An Amazon Connect Instance configured for SAML authentication
2. Appropriate AWS permissions to create Identity and Access Management (IAM) roles and policies
3. Administrator permissions for your Salesforce Org
4. Amazon Connect CTI Adapter AppExchange package installed and configured

Configuring Salesforce as an Identity Provider

First, we need to enable Salesforce to act as an identity provider (IdP). An IdP performs end user authentication and provides the credentials to the requesting service provider. In this case, Salesforce server as the IdP and Amazon Connect the service provider, while being embedded in Salesforce.

Setup Identity Provider & Download Metadata

1. Log in into your Salesforce org and go to **Setup**.
2. In the **Quick Find** field, type **Identity Provider**, then select **Identity Provider** from the result list
3. Identity Provider may be enabled by default. If not, choose **Enable Identity Provider**, then select the appropriate certificate and select Save.

Identity Provider

Enable Salesforce.com as an identity provider so you can use single sign-on with other web sites, and define the appropriate service providers whose applications support single sign-on. You can switch to different service providers without having to log in again. [Learn more...](#)

Identity Provider Setup

Enable Identity Provider

Click Enable Identity Provider to enable your Salesforce.com organization as an identity provider.

Name	Created Date
No Service Providers	

Service Providers

Service Providers are now created via Connected Apps. Click here.

4. Choose **Download Metadata** and save the file to your computer.

Identity Provider

Help for this Page 

Enable Salesforce.com as an identity provider so you can use single sign-on with other web sites, and define the appropriate service providers whose applications support single sign-on. You can switch to different service providers without having to log in again. [Learn more...](#)

Quick Tips

- [Certificates and Keys](#)
- [About Single Sign-On](#)
- [My Domain](#)

Identity Provider Setup

[Edit](#) [Disable](#) [Download Certificate](#) [Download Metadata](#) 

▼ Details

Issuer <https://ctiadAPTERDEMO-dev-ed.my.salesforce.com>

▼ Currently chosen certificate details

Label	Unique Name
SelfSignedCert_17Feb2020_221125	SelfSignedCert_17Feb2020_221125

Created Date 2/17/2020, 2:11 PM Expiration Date 2/17/2021, 4:00 AM

Key Size 2048

▼ SAML Metadata Discovery Endpoints

Salesforce Identity	Endpoint URL
Salesforce Identity	https://ctiadAPTERDEMO-dev-ed.my.salesforce.com/.well-known/samlidp.xml

Configure the Identity Provider, Policy, and Role in the AWS Console

Next, you need to configure the identity provider (Salesforce) in the AWS console and provide access to Amazon Connect via IAM policies and roles. This allows AWS to acknowledge Salesforce as the identity provider and to provide users authenticated through Salesforce with the access required to login to Amazon Connect.

Configure the Identity Provider

1. Login to the [AWS console](#)
2. Open the [AWS identity and Access Management \(IAM\) Console](#)
3. Select **Identity providers**

Identity and Access Management (IAM)

Dashboard

▼ Access management

Groups

Users

Roles

Policies

Identity providers 


Account settings

4. Choose **Create Provider**

5. On the Configure Provider screen, select **SAML** as the Provider Type

Configure Provider

Choose a provider type.

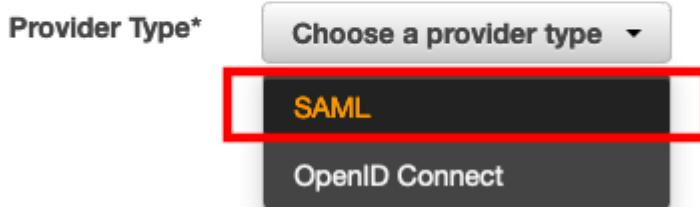

6. Set the Provider Name to **SalesforceConnect**

7. Import the metadata file you downloaded previously by selecting Choose File and navigating to the downloaded metadata file.

8. Select Next Step

9. Choose Create

10. The Identity provider has been created

Create the IAM Role and Policy

1. Login to the [AWS console](#)

2. Open the [AWS identity and Access Management \(IAM\) Console](#)

3. Select **Roles**, then choose **Create role**

4. Choose **SAML 2.0 federation**


5. In the SAML provider dropdown, select the provider you just created, which should be named **SalesforceConnect**

6. Select the radio button for **Allow programmatic and AWS Management Console access**. The Attribute and Value fields should auto-populate

Create role

1 2 3 4

Select type of trusted entity



Allows users that are federated with SAML 2.0 to assume this role to perform actions in your account. [Learn more](#)

Choose a SAML 2.0 provider

If you're creating a role for API access, choose an Attribute and then type a Value to include in the role. This restricts access to users with the specified attributes.

SAML provider

Allow programmatic access only
 Allow programmatic and AWS Management Console access

Attribute

Value*

Condition

7. Select Next: Permissions

8. On the Attach permissions policies page, select **Create policy**. This will open a new browser tab.

9. Choose the **JSON** tab to switch to the JSON editor

10. Replace the existing JSON with the following:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "Statement1",
      "Effect": "Allow",
      "Action": "connect:GetFederationToken",
      "Resource": [
        "**YOUR ARN**/user/${aws:userid}"
      ]
    }
  ]
}
```

11. Replace ****YOUR ARN**** with the ARN of your Amazon Connect instance. To find your Amazon Connect instance ARN:

12. Open a new tab in your browser and navigate to [Amazon Connect Console](#)

13. Click on the name (alias) of your Amazon Connect instance

14. Copy the Instance ARN and paste it to your computer's notepad (you will use it in a few places)

15. Choose **Review policy**

16. Set the Name to **SalesforceConnectPolicy**

17. Select **Create Policy**

18. Once the Policy has been created, close the tab, go back to the original (Role) tab in your browser and select the **Refresh** button (do not refresh the browser)

19. In the search field, enter **SalesforceConnectPolicy** and select the box to attach the policy.

Create role

1 2 3 4

▼ Attach permissions policies

Choose one or more policies to attach to your new role.

Choose one or more policies to attach to your new role.

Create policy ⟳

Filter policies Showing 1 result

SalesforceConnectPolicy None

20. Choose **Next: Tags** and set tags if desired, then choose **Next: Review**

21. Name the Role **SalesforceConnectRole** and provide a description if you like

22. Select Create role

Complete the Base Salesforce Configuration

Next, you need to configure a Connect App in Salesforce and provide further configuration to complete the SAML integration.

Create the Connected App in Salesforce

1. Log in into your Salesforce org and go to **Setup**

2. In the **Quick Find** field, type **Apps** and select **Build->Create->Apps**

3. Select New Connected App

4. Provide a name for the Connected App, such as **AmazonConnectSAML**, then press tab and the API Name should auto-populate

5. Provide an email contact address

New Connected App

[Save](#) [Cancel](#)

Basic Information

Connected App Name	AmazonConnectSAML
API Name	AmazonConnectSAML
Contact Email	dougjaso+ctiadapterdemo@amazon.co
Contact Phone	
Logo Image URL	Upload logo image or Choose one of our sample logos
Icon URL	Choose one of our sample logos
Info URL	
Description	

6. In the Web App Settings section, choose **Enable SAML**

7. Leave Start URL empty

8. Set Entity Id to the same name that you gave the Identity Provider in the IAM console, which should be **SalesforceConnect**

9. Set ACS URL as <https://signin.aws.amazon.com/saml>

10. Set Subject Type as **Persistent ID**

Web App Settings

Start URL	<input type="text"/>
Enable SAML	<input checked="" type="checkbox"/>
Entity Id	SalesforceConnect
ACS URL	https://signin.aws.amazon.com/saml
Enable Single Logout	<input type="checkbox"/>
Subject Type	Persistent ID
Name ID Format	urn:oasis:names:tc:SAML:1.1:nameid-format:unspecified
Issuer	https://ctiadapterdemo-dev-ed.my.salesforce.com
IdP Certificate	Default IdP Certificate
Verify Request Signatures	<input type="checkbox"/>
Encrypt SAML Response	<input type="checkbox"/>

11. Choose **Save**. The screen should refresh and the new Connected App should be displayed

12. Scroll down to the **Custom Attributes** section and select **New**

13. Set Key as <https://aws.amazon.com/SAML/Attributes/RoleSessionName>

14. Set Value as **\$User.Email**

15. Select **Save**

Create Custom Attribute

Key	<input type="text" value="https://aws.amazon.com"/>
Value	<input type="text" value="\$User.Email"/> <div style="border: 2px solid blue; height: 150px; width: 100%;"></div>
<input type="button" value="Save"/> <input type="button" value="Cancel"/>	

16. Select New again to configure another custom attribute

17. Set Key as <https://aws.amazon.com/SAML/Attributes/Role>

18. The Value is going to be a combination of the Identity Provider and IAM Role ARNs.

a. In a new tab, open the [AWS identity and Access Management \(IAM\) Console](#)

- b. On the left navigation, select **Identity providers**
- c. Select the Identity provider you created earlier, which should be named **SalesforceConnect**
- d. Copy the **Provider ARN** to your computer's notepad
- e. Return to the IAM console and select **Roles**
- f. Select the Role you created earlier, which should be **SalesforceConnectRole**
- g. Copy the **Role ARN** to your computer's notepad
- h. Format the combined value as follows:

```
'Identity Provider ARN' & ',' & 'Role ARN'
```

- i. Paste the formatted value into the Custom Attribute Value


19. Select **Save**

Create Custom Attribute

The screenshot shows the 'Create Custom Attribute' dialog. The 'Key' field is set to 'https://aws.amazon.com'. The 'Value' field contains the following expression:
'arn:aws:iam::YOURACCOUNT:saml-provider/SalesforceConnect' & ',' &
'arn:aws:iam::YOURACCOUNT:role/SalesforceConnectRole'
Below the dialog are 'Save' and 'Cancel' buttons.

20. At the top of the Connected App description, select **Manage**
21. Scroll down to the **SAML login Information** section
22. Copy the **IdP-Initiated Login URL** to your computer's notepad
23. Scroll down to find the Profiles section, then select **Manage Profiles**
24. Select a profile from the list, for example System Administrator for testing purposes
25. Choose **Save**

26. Open a new tab in your browser and navigate to IdP-Initiated Login URL that you copied in an earlier step
27. The browser will redirect to AWS Console and log you in automatically as a federated user **Note:** you may be able to see AWS services, but you should have no configuration rights.

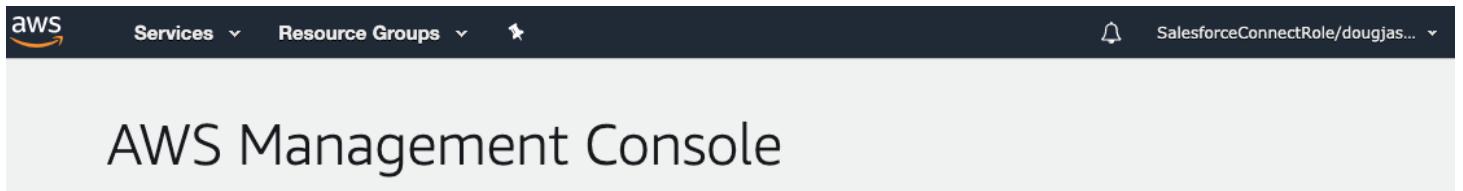

28. The Federated Login consists of the Role name and your Salesforce email address.
29. Initial validation is complete

Complete the Amazon Connect Configuration

The last step in the SAML setup is to add users to Amazon Connect that exist in your Salesforce org, then validate login. It is critical that the usernames for both platforms match exactly.

Add Users to Amazon Connect

1. In a new browser tab, login to the [AWS console](#)
2. Open the [Amazon Connect Console](#)
3. Select the name (alias) of your Amazon Connect instance
4. Choose **Login as administrator**

Overview

Instance ARN	arn:aws:connect:us-west-2: XXXXXXXXXX instance: XXXXXXXXXX
Directory	ctiadapterdemo
Service-linked role	! AWSServiceRoleForAmazonConnect_ Learn more
Login URL	https://ctiadapterdemo.awsapps.com/connect/login

5. Within the Amazon Connect administration portal, select **Users** then choose **User Management**
6. Click **Add New Users**
7. Leave **Create and setup a new user** selected and choose **Next**

8. Complete the First and Last name fields as appropriate

9. Set the login name to match the **Email Address** of your Salesforce user

10. Set the **Routing Profile**. In this example, the default Basic Routing Profile is shown

11. Set the **Security Profile**. In this example, *Admin* is shown

Add new user

The screenshot shows the 'Add new user' wizard in the Amazon Connect console. Step 2: Add user details. The form includes fields for First name (Jason), Last name (Douglas), and Login name (j+ctladapterdemo@amazon.com). Below the main form, there are three sections: Routing Profile (Basic Routing Profile), Security Profiles (Admin), and Phone Type (Soft phone, Auto-Accept Call checked). The After call work (ACW) timeout field is set to 0.

12. Select **Save**

13. Select **Create Users**

14. Repeat this process as required for your staff

Final Configuration for the Lightning Experience

Now that all of the underlying pieces are in place, the last steps are to create the Amazon Connect Single Sign On URL and validate that it works correctly, then configure the Lightning CTI adapter and login the agent.

Create the Amazon Connect SSO URL

You create the Amazon Connect SSO URL by combining the IdP-Initiated Login URL that you copied earlier, and a relay state URL that will redirect the authenticated user to your Amazon Connect instance.

The 'RelayState' will be in the following format:

<https://console.aws.amazon.com/connect/federate/InstanceId?destination=%2Fconnect%2Fccp>

Please note that "console.aws.amazon.com" refers to US-East-1 region (N. Virginia). If your Amazon Connect instance is in a different region, please use the region Console URL. For example:

<https://us-west-2.console.aws.amazon.com/connect/federate/InstanceId?destination=%2Fconnect%2Fccp>

1. To begin, format the relay state URL by replacing **InstanceId** with your Instance Id. To find your Amazon Connect Instance Id:

- a. Open a new tab in your browser and navigate to the [Amazon Connect Console](#)
- b. Click on the name (alias) of your Amazon Connect
- c. From the Instance ARN, copy the portion after the '/'. This is the Instance Id

Overview

The screenshot shows the 'Overview' section of the Amazon Connect console. It includes fields for 'Instance ARN' (arn:aws:connect:us-east-1:XXXXXXXXXXXX:instance/f0c669ee-21dc-XXXX-XXXX-XXXX-XXXX), 'Directory' (XXXXXXXXXXXX), 'Login URL' (<https://XXXXXXXXXX.awsapps.com/connect/login>), and a 'Login as administrator' button. A red arrow points to the 'InstanceId' part of the Instance ARN.

2. Concatenate the 'IdP-Initiated Login URL' and the 'RelayState' by combining the two with "&RelayState=" in between, for example:

[https://mXXXXXXXXrun-dev-ed.my.salesforce.com/idp/login?](https://mXXXXXXXXrun-dev-ed.my.salesforce.com/idp/login?app=0sp0N000000Caid&RelayState=https://console.aws.amazon.com/connect/federate/InstanceId?destination=%2Fconnect%2Fccp)

app=0sp0N000000Caid&RelayState=https://console.aws.amazon.com/connect/federate/**InstanceId**?destination=%2Fconnect%2Fccp

3. This is the Final SSO URL, needed for the Amazon Connect Lightning CTI Adapter Configuration.

4. To validate this URL:

- a. Open a new tab in the same browser that you are logged into Salesforce
- b. Paste the fully concatenated URL into the new browser and press enter
- c. You should automatically login and be redirected to the Amazon Connect Contact Control Panel.


5. Once you validate the full URL, you are ready to add it to the Lightning Adapter

Configure the CTI Lightning Adapter in Salesforce For SSO

Now we are ready to complete the last step in the configuration process: Adding the SSO settings for Salesforce to the Lightning Adapter. This will configure the adapter to authenticate via SSO and redirect to

the Amazon Connect Contact Control Panel once authentication completes.

1. Log in into your Salesforce org and go to the **Service Console**
2. Expand the **navigation menu** by selecting the down arrow and choose **AC CTI Adapters**.

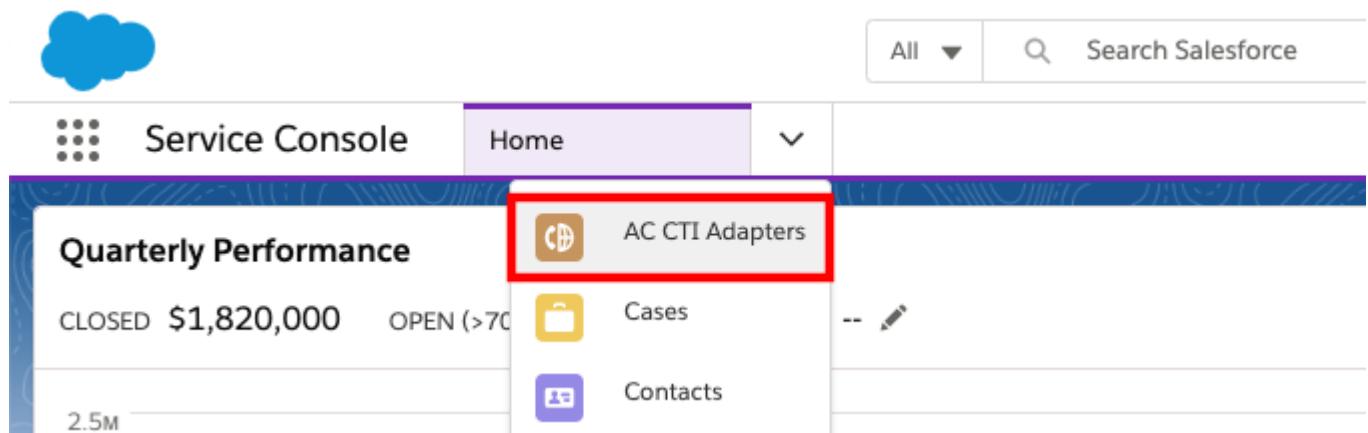

3. Select **ACLightningAdapter**
4. Scroll down to the Single SignOn (SSO) section and choose the pencil icon of either field to edit

A screenshot of the AC Lightning Adapter configuration page. It shows a section titled 'Single SignOn (SSO)' with two fields: 'SSO Url' and 'SSO Relay State'. To the right of each field is a small edit icon (pencil symbol). A red box highlights the edit icon for the 'SSO Url' field.

5. For the SSO Url, copy the first part of the SSO URL that you created previously, up to the first question mark (do not copy the question mark), for example:

```
https://mXXXXXXrun-dev-ed.my.salesforce.com/idp/login?  
app=0sp0N000000Caid&RelayState=https://console.aws.amazon.com/connect/feder  
ate/<b>InstanceId</b>?destination=%2Fconnect%2Fccp
```

6. Paste this portion of the URL into the **SSO Url** field

A screenshot of the AC Lightning Adapter configuration page. The 'SSO Url' field is highlighted with a yellow background and contains the URL 'https://sample-dev-ed.my.salesforce.com/idp/login'. The edit icon to the right of the field is also visible.

7. For the SSO Relay State, copy everything AFTER the question mark (do not copy the question mark), for example:

```
https://mXXXXXXrun-dev-ed.my.salesforce.com/idp/login?  
app=0sp0N000000Caid&RelayState=https://console.aws.amazon.com/connect/feder  
ate/<b>InstanceId</b>?destination=%2Fconnect%2Fccp
```

8. Paste this portion of the URL into the **SSO Relay State** field

▼ Single SignOn (SSO)


SSO Url

SSO Relay State

9. Choose **Save**

10. **Refresh** your browser to make the changes take effect

- a. **NOTE:** If you receive a blocked popup warning, select the warning and change the setting to always allow popups from your Salesforce org, then refresh the browser again

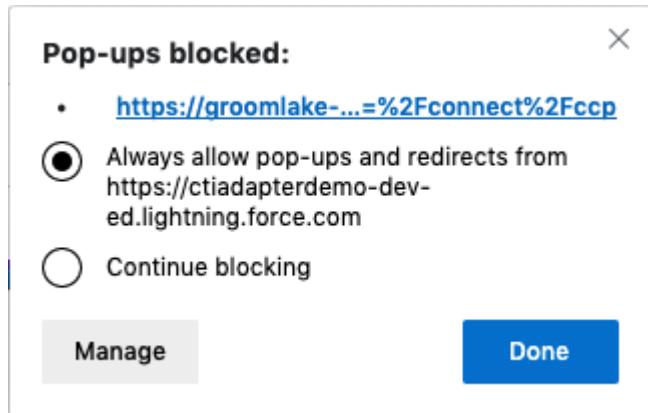

11. After a few seconds, a new window should pop up for a moment. This window is performing the authentication and setting your session cookie. Once it does this, it will close automatically.



Change status ▾



Initializing...

12. Once the authentication window closes, select the **phone icon** in the console toolbar to open the CCP Note: You may also receive popups to allow notifications and microphone access. Please accept both.
13. You should now see the authenticated and logged in CCP

ACLightningAdapter | Sale

Lightning

AdapterTest Burner Accounts -...

Service Console AC CTI Adapters

Recently Viewed

1 item • Updated 4 minutes ago

Search this list...

Amazon Connect

Offline

Welcome Jason

Quick connects

Number pad

Amazon Connect History

Configuration is complete

Appendix C: CTI Flow Examples

This appendix includes samples scripts that provide different functionality depending on the event source.

Voice Contact Screenpop (Legacy Adapter Support)

Source: Amazon Connect Voice Contact

Event: onConnecting

[Download](#)

Chat Contact Screenpop

Source: Amazon Connect Chat Contact

Event: onConnecting

[Download](#)

Click-to-Dial

Source: Amazon Connect Chat Contact

Event: onClickToDial

[Download](#)

Screen Pop on Customer Phone Number

Source: Amazon Connect Voice Contact

Event: onConnecting

[Download](#)

Screen Pop a Case on Contact Attribute Data (if it exists) or Pop a New Case (if it does not)

Source: Amazon Connect Voice Contact

Event: onConnecting

[Download](#)

Create a Task (Call Activity) and Pop That Task

Source: Amazon Connect Voice Contact

Event: onConnecting

[Download](#)

Screenpop on Customer Email Address (in contact attribute data)

Source: Amazon Connect Chat Contact

Event: onConnecting

[Download](#)

Create a Task (Call Activity) and Pop That Task

Source: Amazon Connect Chat Contact

Event: onConnecting

[Download](#)

Default CTI Flows

The following zip file includes default flows, which are automatically added and activated on new installations of the package. However, if you are upgrading from an earlier version you may need to replace your legacy script with the new flow.

[Download](#)

Appendix D: CTI Flow Blocks

If-else

Change the flow of your script depending on value of fields you fetch or store. This is a simple "if-else" utility for your flow.

HTTP Request

Make an HTTP request.

Get Property

Fetches a property from the local data store. You can access a property you have retrieved from the local store by referring to the return value of this block.

Get All Properties

Returns all stored properties.

Format Phone Number

Formats a phone number for a country code.

Format Phone Number (E164)

Formats a phone number for a country code in E164 format.

Format a Date object

Returns a formatted date.

Is Truthy?

This is a utility to branch your flow depending on the truthiness of a value.

Set Property

Assigns a value to a property in the local data store.

Log to Console

Sends a static or dynamic value from an action to a logger.

Show Modal

The command to open modal.

Enable Click To Dial?

The query to determine whether Click to Dial should be enabled.

Enable Click To Dial

The command to enable Click to Dial.

Disable Click To Dial

The command to disable Click to Dial.

Get App View Info

The command to get App View information.

Get Softphone Layout

The query to get softphone layout.

Get Agent Workload on Salesforce

Returns the agent's current workload.

Complete High Velocity Sales Work With Task Saved

This methods allow your CTI implementation to communicate with High Velocity Sales (HVS) to handle HVS work.

Refresh View

The command to refresh the view.

Show Softphone Panel

The command to show softphone panel.

Hide Softphone Panel

The command to hide softphone panel.

Set Softphone Panel Height

The command to set the height of softphone panel.

Set Softphone Panel Width

The command to set the width of softphone panel.

Screenpop Object

The command to open a screenpop with information from object.

Screenpop Url

The command to screenpop a url in a new browser tab or browser window.

Screenpop Object Home

The command to screenpop to an object's home page.

Screenpop List

The command to screenpop a list view.

Screenpop Search

The command to screenpop search results based upon the search input. Not to be confused with "Search And Screenpop."

Screenpop New Record

The command to screenpop to a new record of the specified type with specified default field values.

Search And Screenpop

This command searches objects specified in the softphone layout for a given string. Returns search results and screen pops any matching records. Not to be confused with "Screenpop Search."

Run Apex

The command to run an apex function.

Get Agent State from Salesforce

The command to get an agent's state.

Set Agent State on Salesforce

The command to set an agent's presence state on Salesforce.

Login Agent on Salesforce

The command to login an agent on Salesforce.

Logout Agent on Salesforce

The command to logout an agent on Salesforce.

Save (or Create) a Record

The command to save or create a Salesforce object.

Create a Task

The command to create a Task. (The Subject of the task will be a string made up of upto 3 field values.)

Is Contact "Do Not Call"?

The query to check if the Contact requested not to be called.

Dial Number

The command to dial a phone number or to conference to an endpoint.

Mute Agent

The command to mute the agent.

Unmute Agent

The command to unmute the agent.

Get Agent Status from Connect

The command to get the current presence status of the agent from Connect.

Set Agent Status on Connect

The command to set the current presence status of the agent on Connect.

Set Agent Status By Name on Connect

The command to set the current presence status of the agent on Connect by name of the state.

Set Agent as Available on Connect

The command to set the current state of the agent to "Available."

Get Quick Connection List

Gets the list of quick connects available to the current agent

Get Transfer Connection List

Gets the list of quick connects available to the current agent.

Get Endpoint by Phone Number

Generates and returns an endpoint for a provided phone number.

Get Available Agent States

Gets all of the available agent states including custom states.

Get Agent Name

Returns the agent's user friendly display name for the agent.

Get Agent Extension

Returns the phone number that is dialed by Amazon Connect to connect calls to the agent for incoming and outgoing calls, if softphone is not enabled.

Get Agent Deskphone Number

Returns the phone number that is dialed by Amazon Connect to connect calls to the agent for incoming and outgoing calls, if softphone is not enabled.

Is Agent Softphone Enabled?

Checks if agent softphone is enabled. Branches in different directions if it is or not.

Change Agent to Softphone

Changes the current agent to softphone mode.

Change Agent to Deskphone

Changes the current agent to desktop phone mode with the specified phone number.

Get Agent Configuration

Returns the phone number that is dialed by Amazon Connect to connect calls to the agent for incoming and outgoing calls, if softphone is not enabled.

Get Agent Dialable Countries

Returns the list of dialable countries for the current agent.

Create Task Contact

The command to create a task contact that is sent to the provided quick connect endpoint. The quick connect must be available to any queue the agent has access too.

Get Contact Attribute

The command to get value of an attribute from the contact in the current session.

Is Voice Contact?

The command to determine if the contact is a voice contact.

Is Chat Contact?

The command to determine if the contact is a chat contact.

Is Task Contact?

The command to determine if the contact is an amazon connect task contact.

Is Contact Inbound?

The command to determine if the contact is inbound.

Is Contact Transfer?

The command to determine if the contact is transferred.

Is Callback?

The command to determine if the contact is a queue callback.

Get Contact Properties

The command to get properties of a contact.

Get Customer Phone Number

The command to get customer phone number of a contact.

Get Contact Interaction Metadata

The command to get metadata about a contact interaction.

Pop Task Contact's ReferenceUrls

The command to pop any reference urls if the contact is a task. Returns the number of urls popped.

Query value

The query to execute an arbitrary SOQL statement and returns the results.

Get Salesforce Lead Id

The command to get a salesforce lead id using a formatted phone number.

Open Salesforce Primary Tab

Opens a new primary tab to display the content of the specified URL.

Open Salesforce Sub Tab

Opens a new subtab (within a primary tab) that displays the content of a specified URL.

Get Focused Primary Tab Object Id

Returns the object ID of the primary tab on which the browser is focused.

Get Focused Subtab Object Id

Returns the object ID of the subtab on which the browser is focused.

Call jQuery Method

Perform a method call on a jQuery selection with your arguments.

Replace String

Perform a .replace() method on an input string.

Text Starts With Value

Checks whether a text input starts with one of the values.

Text Ends With Value

Checks whether a text input ends with one of the values.

Join Strings

Concatenates 2 values into a string.

SOQL Query

The query to execute an arbitrary SOQL statement and returns the results.

Multiply

Multiply two numbers.

Divide

Divide two numbers.

Get Tab Object Map

Returns a map of all visible primary tabs and their associated objects (if available).

Close Salesforce Tab

Closes the Salesforce with a given id.

Delay

Delays execution for a period of time. (Keep in mind that your flow may be stopped if it runs longer than the maximum allowed execution window of 60 seconds.)

Get Primary Tab Ids

Returns all of the IDs of open primary tabs.

Get Tabs With Matching Url

Returns the ids of the primary tabs with the url matching a provided string.

Length

Returns the length of a value.

Slice

Returns the slice of a value.

Cast a Value to a Type

Cast an input value to a Javascript type, such as Number or String.

Get CCP Logs

The command to get the logs of agent from Connect.

Clear All Properties

Clears all stored properties.

Unset Property

Removes the value assigned to a property in the local data store.

Show Attributes

This command displays the contact attributes in the CCP overlay.

Is Task Contact?

Check if the contact is a task

Create Task Contact

Creating a new task contact with certain inputs.

Pop Task Contact's ReferenceUrls

Pop any reference urls that are related to the task contact

Start Recording

Use the contact recording API to start recording the call.

Stop Recording

Use the contact recording API to stop recording the call.

Update Contact Attributes

Use the Connect API to update the attributes of the current contact.

Get Payload

Retrieve the payload of the CTI Flow. (The payload can be configured by CTI Actions.)

Send Data to CCP Overlay

Send an object to Data panel of CCP Overlay.

Leave a Voicemail

Use Voicemail drops to leave a voicemail.