



@scottmotte



SendGrid[®]

SMTP API

Web API

CloudFoundry Add-On




AppDirect



CLOUD
FOUNDRY™





Let's Code!






This repository ▾ Search or type a command ⓘ


ExploreGistBlogHelp

 scottmotte   

PUBLIC  scottmotte / spring-attack

Unwatch ▾ 1

★ Star 0

 Fork 0


This is an example app for my session at the SpringOne2Gx. — Edit

4 commits


1 branch


0 releases





1 contributor


 branch: master ▾ **spring-attack** / +

Update README for development

 **scottmotte** authored 6 hours ago

latest commit 2bb76ad28f 

 src	Uses environment variables ot set SendGrid username and password	6 hours ago
 .gitignore	Initial commit - basics of signing up and getting the model data back	5 days ago
 README.md	Update README for development	6 hours ago
 build.gradle	SendGrid piece of the presentation	5 days ago


 **README.md**


spring-attack


This is an example app for my session at the [SpringOne2Gx](#). It demonstrates combining [SendGrid](#) and [Cloudfoundry](#).


<> Code


! Issues 0


 Pull Requests 0

 Wiki

 Pulse


 Graphs

 Network


 Settings


SSH clone URL

git@github.com:scottmotte/spring-attack



You can clone with [HTTPS](#), [SSH](#), [Subversion](#), and [other methods](#).

 Clone in Desktop

 Download ZIP


```
spring-attack (master) gradle jettyRunWar
```


TO THE INTERWEBS!!






CLOUD
FOUNDRY™



cf in action. create an app. bind sendgrid. set envs.

```
cf target api.run.pivotal.io  
cf login  
gradle assemble  
cf push --path build/libs/spring-attack.war
```

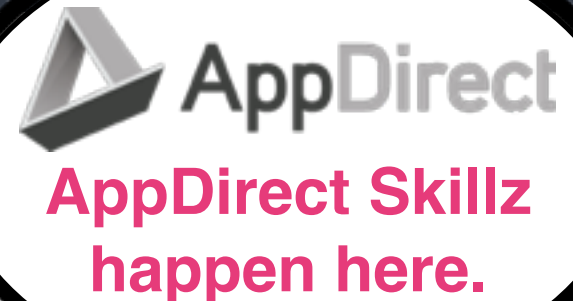



```
cf create-service sendgrid  
cf bind-service
```

```
cf files spring-attack logs/env.log
```

```
cf set-env spring-attack SENDGRID_USERNAME username  
cf set-env spring-attack SENDGRID_PASSWORD password
```

```
cf env spring-attack
```

<http://spring-attack.cfapps.io>

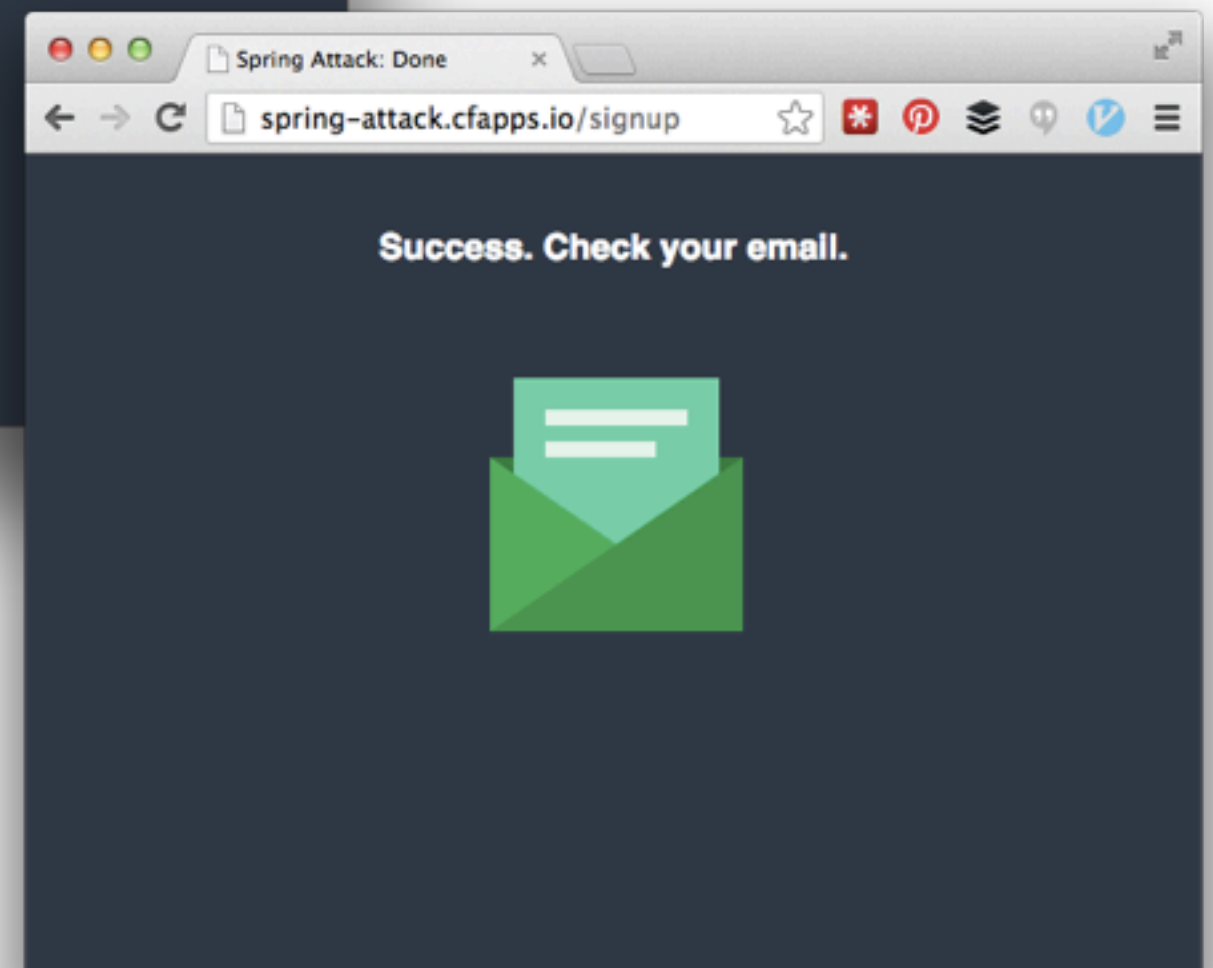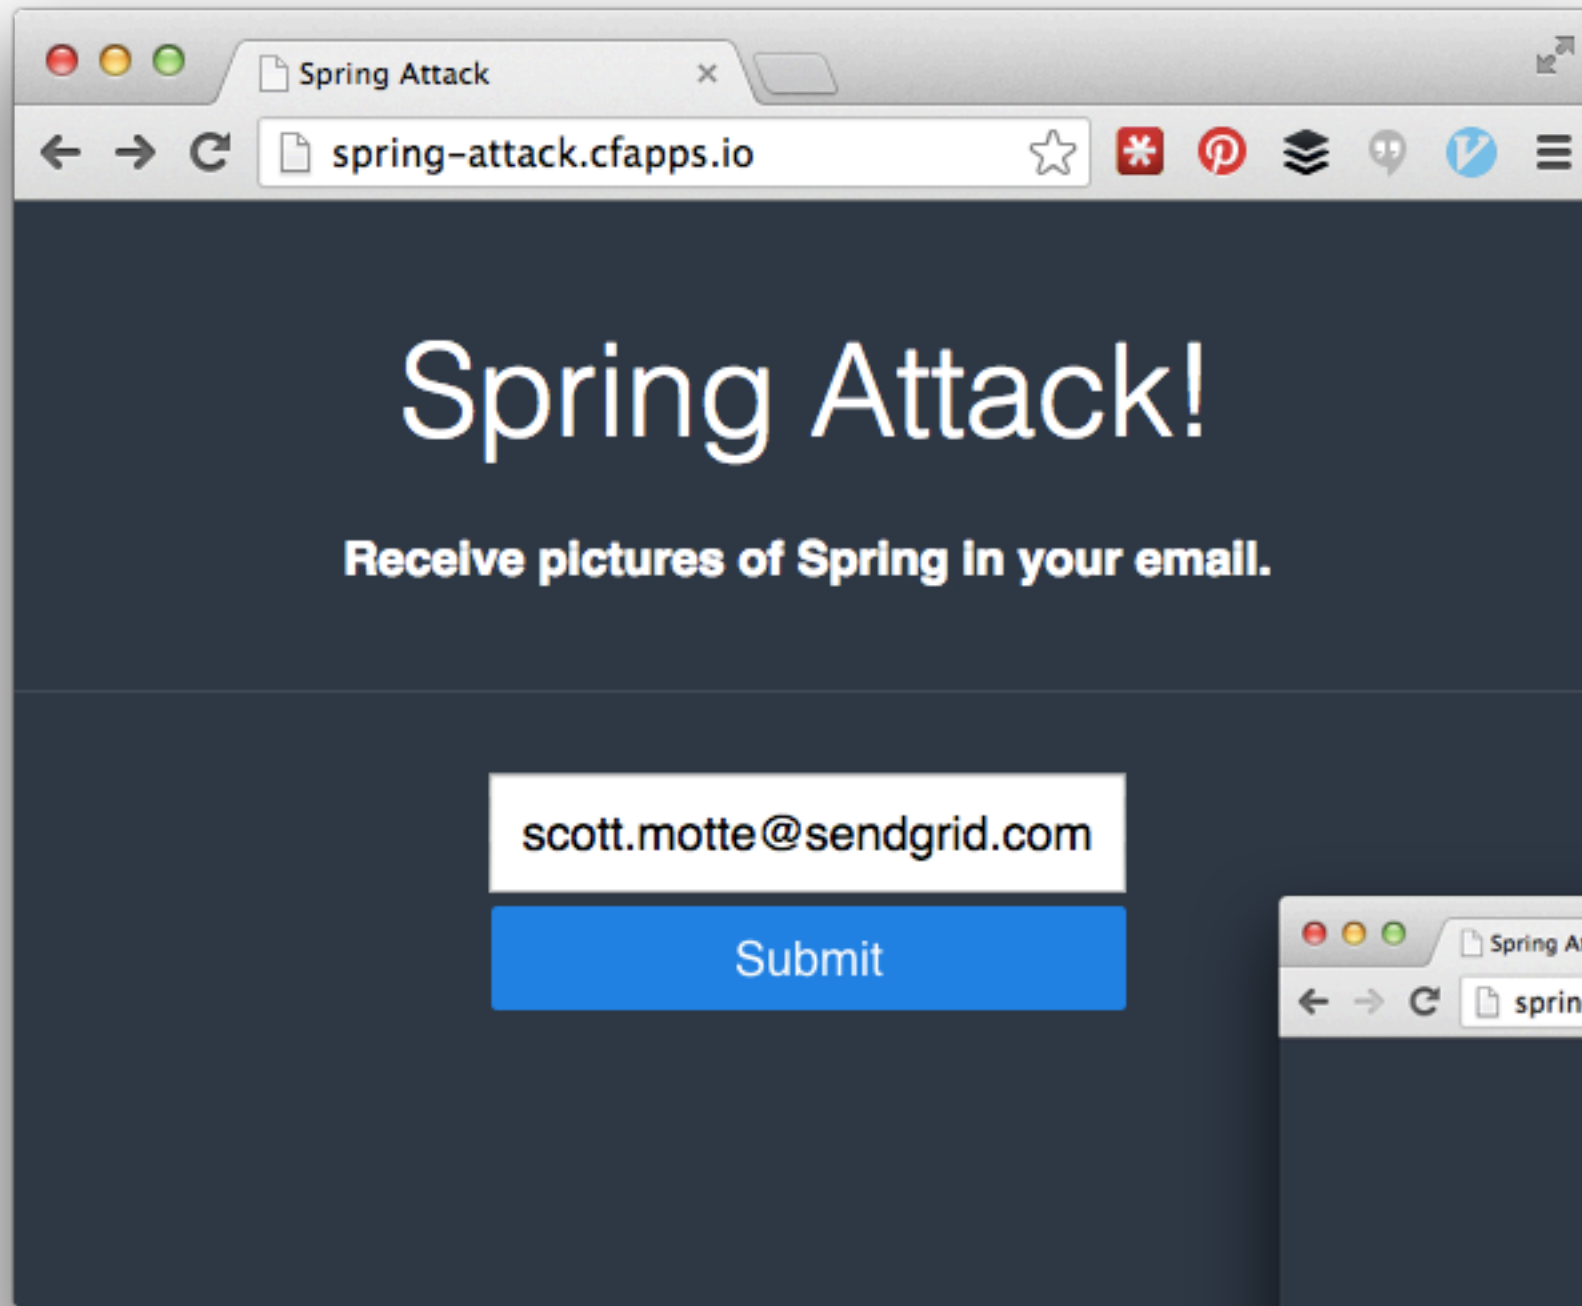

[Spring Attack] Welcome



Inbox x

from myself to myself x



scott.motte@sendgrid.com

to me ▾

Thanks for signing up. Here is a picture of Spring to start you off.



We like to solve
problems for
developers.



Thanks.