

Tokenization with Split Trees

Craig W. Schmidt^{*,†} Michael Krumdick^{*} Adam Wiemerslage^{*}
Seth Ebner^{*} Varshini Reddy^{*} Yuval Pinter[§] Chris Tanner^{*,‡}

^{*}Kensho Technologies [§]Ben-Gurion University [‡]MIT
Cambridge, MA Beer Sheva, Israel Cambridge, MA

Abstract

We introduce Tokenization with Split Trees (ToaST), a subword tokenization method that directly optimizes compression under a new recursive inference procedure. ToaST greedily splits each pretoken into a full binary tree using precomputed byte n -gram counts, independent of any vocabulary. Given a vocabulary, inference recursively descends each split tree and emits the first in-vocabulary node reached on each path. Vocabulary selection is formulated as an Integer Program (IP) that minimizes the total token count over all split trees under this inference procedure. The Linear Programming (LP) relaxation is near-integral in practice, yielding provably near-optimal vocabularies, with training time empirically scaling quadratically in the number of split trees. On English text, ToaST reduces token counts by more than 11% compared to BPE, WordPiece, and UnigramLM at vocabulary sizes of 40,960 and above, reducing the number of inference tokens for models using this tokenizer, thus extending the effective context length. ToaST also uses common single-byte tokens less frequently than these baselines, leading to a substantial improvement in Rényi efficiency. In experiments training 1.5B parameter language models, ToaST achieves the highest CORE score, outperforming baselines by 2.6%–7.6%, with significance for two of three, and scoring best on 13 of 22 individual tasks.

1 Introduction

Tokenization is an important first step in many natural language processing tasks. The most common approach, Byte Pair Encoding (BPE; Sennrich et al., 2016), was initially designed as a compression technique (Gage, 1994), minimizing the number of tokens in a greedy, heuristic manner. Using fewer tokens has the immediate practical benefits of lower inference cost and a larger effective

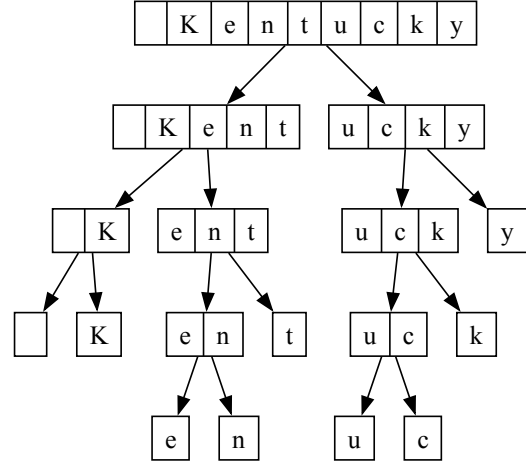


Figure 1: Example split tree for ‘Kentucky’.

context window. The relationship between compression and downstream task performance is less clear. Some studies (Gallé, 2019; Rust et al., 2021; Goldman et al., 2024) find a correlation, while others (Schmidt et al., 2024; Ali et al., 2024) argue compression alone does not explain tokenization quality. However, these practical benefits are reason enough to optimize compression directly rather than rely on BPE’s greedy approximation.

Prior work has shown that finding a tokenizer that maximizes compression is NP-complete (Whittington et al., 2025; Lim et al., 2025), even over bounded alphabets (Kastreva et al., 2025). These results apply to both the bottom-up merge-based formulation of BPE and the direct vocabulary selection problem using optimal shortest-path inference (Schmidt et al., 2024). Lim et al. (2025) also show tokenization is NP-hard under shortest-path inference, proposing a partition cover approach in which a greedy polynomial-time approximation algorithm gives a 3% compression gain over BPE. These hardness results suggest a need for alternative approaches.

We introduce a new subword tokenization ap-

[†]Corresponding author: craig.schmidt@kensho.com

proach that follows neither the bottom-up approach of BPE nor the alternative ablative top-down approach of UnigramLM (Kudo, 2018) or SaGe (Yehezkel and Pinter, 2023). Tokenization with Split Trees (ToaST) instead uses a large dictionary of byte n -gram counts to greedily split a given pretoken into a full binary tree. The nodes in this *split tree* form the candidate tokens. The split trees are constructed solely from this precomputed n -gram count data, without first specifying a tokenizer vocabulary. Given a vocabulary, inference follows a recursive descent of the split tree. If a given node of the tree is in the vocabulary, it becomes a token. Otherwise, the procedure is called recursively on the two children in the split tree.

Tokenizer training selects the subset of the candidate tokens, equal to the desired vocabulary size, that minimizes the number of training tokens, by solving an optimization problem. We formulate the training problem as an Integer Program (IP) that can be relaxed and solved as a Linear Program (LP), minimizing the total token count to within a negligible fraction (10^{-6}) of the global optimum. We show computational results up to 700,000 split trees, covering 99% of the aggregated pretoken counts of the training data, with computational time scaling quadratically with the number of split trees. We compare ToaST to several standard tokenization baselines, and show it improves compression by at least 11% for vocabulary sizes of 40,960 or larger, and Rényi efficiency by a comparable amount. Nanochat language models of depth 24 with 1.5B parameters show ToaST achieving the highest CORE metric, significantly outperforming two of three baselines.

2 Split Trees

As is common practice, we first split our training data into pretokens using a regular expression, and then aggregate the unique pretokens by count. Let p index the byte n -grams s_p computed within pretoken boundaries across the training corpus whose count c_p meets or exceeds a threshold $c_{\min}$. For a reasonably large value of $c_{\min}$, these n -grams can be computed efficiently (Schmidt et al., 2026, Appendix B). We can use the counts to split a pretoken in a deterministic way: starting with the full pretoken, we split it into two nonempty parts with the binary split $[s_p, s_{p'}]$ maximizing $\min(c_p, c_{p'})$,¹ with

¹If no pair of splits appears in the count dictionary, then the longest prefix contained in the dictionary is split from the

split	c_p	$c_{p'}$	$\min(c_p, c_{p'})$
⌋ Kentucky	986M	10,558	10,558
⌋K entucky	1.37M	10,647	10,647
⌋Ke ntucky	221,234	10,647	10,647
⌋Ken tucky	60,162	10,699	10,699
⌋Kent ucky	15,944	31,457	15,944
⌋Kentu cky	9,904	70,919	9,904
⌋Kentuc ky	9,900	257,430	9,900
⌋Kentuck y	9,899	67M	9,899

Table 1: Example of split counts, with the selected maximum split score shown in bold.

ties broken by choosing the leftmost split. This formula encourages high counts on all nodes, avoiding lopsided splits.²

Table 1 shows example counts for the pretoken ⌋Kentucky. In this example, the fifth split with a score of 15,944 is chosen. This procedure continues recursively until we have constructed a split tree, with single bytes as leaves, such as the example shown in Figure 1.

3 Split Tree Inference

Tokenization inference is performed by recursively walking the split tree. For ease of exposition, assume we have constructed a vocabulary V , such as the one described in Section 4. At each node, if a node is in V it is emitted as a token, and otherwise its split point is computed and both children are processed recursively. To avoid unknown tokens, we assume that all 243 single bytes appearing in valid UTF-8 are included in V .³ An implementation of the inference algorithm for a dictionary of n -gram counts and a vocabulary is given in Listing 1.⁴

Figure 2 gives an example tokenization using split tree inference. Assume the two nodes shown in white are not in the vocabulary, while the nodes in blue are. Inference will first visit ⌋Kentucky. Since that is not in the vocabulary, it will recursively visit the two children generated by the chosen split. ⌋Kent is in the vocabulary, so it will be part of the tokenization. Since ucky is not in the vocabulary, it will also be split into uck and y, which

remainder of the pretoken. See the most_known routine of Listing 1.

²Any other method independent of the eventual trained vocabulary could be used instead. One could, for example, find morphologically correct splits from a gold standard reference dataset (cf. Hofmann et al., 2021), or enforce that splits not break a multi-byte character when possible. See Section A.

³See Appendix C of Land and Bartolo (2024) for an explanation of why all 256 bytes are not present in valid UTF-8.

⁴Split tree inference speed is competitive with compiled baselines; see Section B.4.

```

# if best_split fails,
# find the longest run we know about in counts
def most_known(s: bytes):
    for i in range(1, len(s)):
        if s[:i] not in counts:
            return i-1 # last one in counts

def best_split(s: bytes):
    best_score = -1
    best_i = -1
    # find the split with the maximum min value
    for i in range(1, len(s)):
        left_s = counts.get(s[:i], -10)
        right_s = counts.get(s[i:], -10)
        score = min(left_s, right_s)
        if score > best_score:
            best_score = score
            best_i = i

    # if no split has both parts in count
    # fall back to this, to split it
    if best_i == -1:
        best_i = most_known(s)

    return best_i

def tokenize(s: bytes, vocab: set[bytes]):
    if len(s) == 0:
        return []

    # all leaves are fine
    # if s in vocabulary, return it
    if len(s) == 1 or s in vocab:
        return [s]

    # recursively call with best split
    best_i = best_split(s)
    return tokenize(s[:best_i], vocab) + \
           tokenize(s[best_i:], vocab)

```

Listing 1: Split tree inference algorithm with a given vocabulary vocab and count dictionary counts.

will be the other two tokens in the tokenization. The nodes below these on the tree are never visited.

This inference procedure has several desirable properties. Changing the vocabulary V has no effect on the split trees, since they are created independently from V . Any possible vocabulary V (containing all 243 necessary single bytes) results in a valid tokenization, unlike BPE which must also have a set of merge rules. Finally, removing a token t from the vocabulary V simply splits any current tokens t into parts, with no other changes. Unlike UnigramLM, PathPiece (Schmidt et al., 2024), or greedy-left-to-right inference (Uzan et al., 2024), there are no cascading effects on the tokenization. Removal of a token t that appears in a given split tree simply continues the recursive process of finding in-vocabulary tokens further down the tree.

4 Tokenization Training

We develop an Integer Programming (IP) formulation that will find the vocabulary of a specified size $m = |V|$ minimizing the total number of tokens used when a training corpus is tokenized with the split tree inference procedure. Experimentally, the

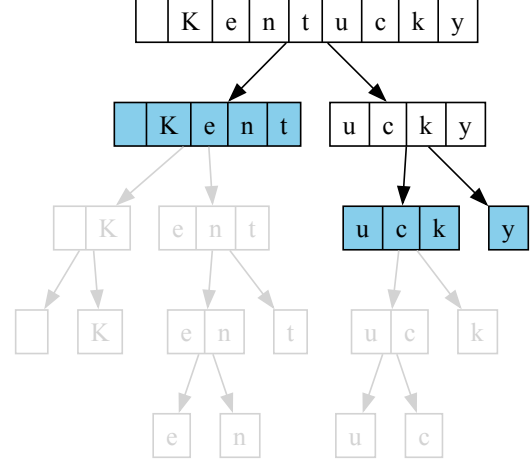


Figure 2: Example tokenization, with white tokens not in the vocabulary, used tokens (in the vocabulary) in blue, and nodes never reached in the recursive descent in light gray.

Token sets	
T	potential tokens in the vocabulary
$V \subset T$	selected vocabulary
Index sets with corresponding element names	
$i \in I$	potential tokens $t_i \in T$
$i \in I_B \subset I$	single byte tokens that must be in V
$j \in J$	split trees, or pretokens
$k \in K_j$	nodes in split tree j
$k \in L_j \subseteq K_j$	leaf nodes of split tree j
$k' \in A_{jk} \subset K_j$	ancestors of node k in split tree j
Parameters	
c_j	aggregated count of split tree j
m	desired vocabulary size $ V $
Variables	
$x_i \in \{0, 1\}$	is token i included in vocabulary V
$z_{jk} \in \{0, 1\}$	is node k in the tokenization of split tree j , using split tree inference

Table 2: Summary of notation.

LP relaxation of this IP can be rounded to an integer solution that is extremely close to the guaranteed global optimum (see Section 5). Thus, we avoid the poor scaling often associated with solving IPs through branch-and-bound.

4.1 Integer Programming Model

For convenience, the notation used in the model is summarized in Table 2. The token sets consist of sets of byte strings representing actual tokens, while index sets are integers. The index used for elements of each index set is also shown.

Let $j \in J$ be an index over the aggregated pretokens in the training data, each forming a split tree, with aggregate count c_j . Let $k \in K_j$ be an

index over the tokens forming nodes in split tree j . Let t_{jk} be the token string for node k in split tree j . Note that there may be duplicate token strings within a given split tree j , but the index k treats them as separate nodes. Let B be the set of 243 single byte tokens that can appear in UTF-8, which should always be in the vocabulary to avoid out of vocabulary tokens. Let T be the set of unique token strings over all nodes of all split trees, combined with B :

$$T = \left(\bigcup_{j \in J, k \in K_j} t_{jk} \right) \bigcup B. \quad (1)$$

Note that T is the set of potential tokens in the vocabulary V , so $V \subseteq T$. Let $i \in I$ be an index over the unique tokens $t_i \in T$. To map token t_{jk} to the correct index i we define:

$$i_{jk} = i \in I | t_i = t_{jk}, \quad \forall j \in J, k \in K_j. \quad (2)$$

In other words, i_{jk} is a lookup for the correct token index i for node k in split tree j .

Let x_i be a binary variable that indicates if token i is included in the vocabulary V ,

$$x_i \in \{0, 1\} \quad \forall i \in I. \quad (3)$$

Let z_{jk} be a binary variable that indicates that node k is part of the tokenization of split tree j after inference is run,

$$z_{jk} \in \{0, 1\} \quad \forall j \in J, k \in K_j. \quad (4)$$

The objective f we seek to minimize is:

$$f = \min \sum_{j \in J} c_j \sum_{k \in K_j} z_{jk}, \quad (5)$$

which is the total number of tokens required to tokenize the training data.

This objective is subject to the constraint that the total number of tokens in the vocabulary $V \subseteq T$ is exactly the desired size $m = |V|$:

$$\sum_{i \in I} x_i = m \quad (6)$$

Let $i \in I_B \subseteq I$ be the indices of the single byte tokens B . We set $x_i = 1$ for all single byte tokens B , to enforce that they are in the vocabulary:

$$x_i = 1 \quad \forall i \in I_B. \quad (7)$$

Consider the example in Figure 3. If the $x_{i_{jk}}$ corresponding to the blue node en is in the vocabulary, then the node will appear in the tokenization

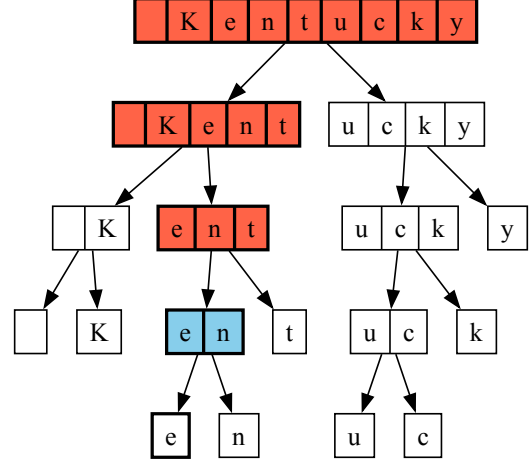


Figure 3: A node (blue) appears in the tokenization when it is in the vocabulary and none of its ancestors (red) are in the vocabulary. An example path from leaf node e to the root is also shown with a heavier black outline.

with $z_{jk} = 1$, unless one of its ancestors, shown in red, also appears in the vocabulary. In that case, the ancestor would block en and appear in the tokenization instead. More generally, $z_{jk} = 1$ if and only if $x_{i_{jk}} = 1$ and $x_{i_{j'k'}} = 0$ for all ancestors k' .

We need the following two types of constraints to enforce that the z_{jk} correctly represent the tokenization of each split tree j as resulting from the inference procedure (Section 3) with the vocabulary specified by the x_i .

4.1.1 Ensuring Complete Coverage

First, we need to ensure that all the bytes of the pretoken are included in the tokenization. Consider the path of nodes from the leaf node e to the base of the tree shown by heavier black outlines in Figure 3. Exactly one of the nodes on the path must appear in the tokenization. There cannot be more than one, since the inclusion of an ancestor in the tokenization prevents its descendants from appearing in the tokenization. If none of the nodes appeared in the tokenization, then the e in the pretoken would not be included in any token of the tokenization. Thus, we need to ensure that $z_{jk} = 1$ for exactly one node along each path from a leaf node to the root.

Let $k \in L_j \subseteq K_j$ be an index over the leaf nodes L_j in split tree j . Let $k' \in A_{jk}$ be an index over the (possibly empty) set of ancestor nodes k' above node k in split tree j . To ensure the entire pretoken is included in the tokenization, we need each leaf node $k \in L_j$ or one of its ancestor nodes

to appear in the tokenization:

$$z_{jk} + \sum_{k' \in A_{jk}} z_{jk'} = 1, \quad \forall j \in J, k \in L_j. \quad (8)$$

Note that Eq (8) ensures that the en of Figure 3 cannot be in the tokenization if one of its ancestors is, since exactly one of the binary z_{jk} on the path can be 1, forcing all others to be 0.

4.1.2 Relating the x and z Variables

All that remains is to ensure that for all nodes where $z_{jk} = 1$, we must have the corresponding $x_{i_{jk}} = 1$ in the vocabulary. Conversely, having $x_{i_{jk}} = 0$ implies $z_{jk} = 0$, meaning we cannot use a token that is not included in the vocabulary. Thus we need:

$$z_{jk} \leq x_{i_{jk}} \quad \forall j \in J, k \in K_j. \quad (9)$$

4.2 Final Model

In total, if we minimize Eq (5) subject to Eqs (3), (4) and (6) to (9), we will get the vocabulary exactly minimizing the total number of tokens in a corpus when using ToaST inference.

4.3 LP Rounding Heuristic

Integer programming is NP-hard (Karp, 1972; Garey and Johnson, 1979). However, the relaxed problem, which replaces the integrality constraints in Eq (3) and Eq (4) with bounds and allows fractional values:

$$0 \leq x_i \leq 1 \quad \forall i \in I, \quad (10)$$

$$0 \leq z_{jk} \leq 1 \quad \forall j \in J, k \in K_j, \quad (11)$$

can be solved efficiently as a Linear Program (LP). With this model, the resulting LP solution has a very small number of fractional values,⁵ which we round with the following simple heuristic. Let x_i^* and z_{jk}^* be the optimal LP solution with objective value f_{LP}^* . Partition I into sets of i indices with an x_i near 1, near 0, or taking a fractional value in between:⁶

$$I_1 = \{i \in I : x_i^* \geq 1 - \varepsilon\}, \quad (12)$$

$$I_0 = \{i \in I : x_i^* \leq \varepsilon\}, \quad (13)$$

$$I_F = I \setminus (I_1 \cup I_0). \quad (14)$$

⁵See Section 5 for our computational results.

⁶LP solutions are computed using floating point values, so most variables are not exactly equal to 0 or 1. We use a small tolerance $\varepsilon = 1 \times 10^{-5}$ when comparing to integer values.

Since there are already $|I_1|$ variables at 1, we would like to round $m - |I_1|$ of the x_i^* for $i \in I_F$ up to 1 to obtain the desired vocabulary size m , and round the rest to 0. The objective contribution C_i^* of the z_{jk}^* associated with each fractional x_i^* is,

$$C_i^* = \sum_{j \in J, k \in K_j : i_{jk} = i} c_j z_{jk}^*, \quad \forall i \in I_F. \quad (15)$$

We use the simple rounding heuristic of rounding $m - |I_1|$ of the x_i^* for $i \in I_F$ with the highest C_i^* up to 1, and the rest to 0. Rounding these x_i^* up allows their associated nodes to be in the tokenization, saving at least c_j per node in the objective versus rounding them down, in which case each of these nodes would have to be represented by at least two tokens rather than one. Given a vocabulary of all integer x_i , the corresponding integer z_{jk} can be found through the split tree inference procedure, finding the first token in the vocabulary along each path from the root, and setting that $z_{jk} = 1$.

5 Scaling Results

5.1 Training Data

We train tokenizers on a portion of the English subset of the multilingual dataset CulturaX (Nguyen et al., 2024). We use a very large 175GB tokenizer training corpus and 37.5GB of validation data for computing intrinsic metrics. This corpus size was chosen to be in the range of diminishing returns found in Reddy et al. (2026).

We first pre-tokenize the training data using a length-limited variant of the regular expression of GPT-4o,⁷ which limits match length to avoid very large split trees resulting from long runs of whitespace, and then compute the frequency of each pre-token in the training corpus. The ToaST model is trained on the most frequent pretokens. Due to the Zipfian distribution of words (Zipf, 1949), the most frequent 700,000 of the 58,469,075 unique pretokens accounted for 99.01% of the total counts of all pretokens, which we deemed sufficient coverage for training.⁸

We then compute all byte n -grams contained within the aggregated pretokens that occur at least $c_{\min}$ times, for use in creating the split trees. We use a cutoff $c_{\min} = 250$, which was set to be slightly below the frequency of 272 achieved by the 700,000th

⁷See Listing 2 in Section B.3 for details.

⁸The fraction of total counts covered by other pretoken counts is given in Table 5 in Section B.1.

most frequent pretoken, which produced 5,991,872 unique n -grams.⁹

5.2 Implementation

The LP models were implemented using the Pyomo modeling language (Bynum et al., 2021; Hart et al., 2011)¹⁰ and solved using the dual simplex algorithm from the HiGHS open source LP solver (Huangfu and Hall, 2018).^{11,12} For comparison, baseline models for BPE, WordPiece (Wu et al., 2016; Schuster and Nakajima, 2012), and UnigramLM were built using the Hugging Face tokenizers library,¹³ using the same length-limited GPT-4o regex used by ToaST.

5.3 Computational Performance

The number of variables and constraints in our LP scales linearly in the total byte-length of all unique pretokens $\sum_j |L_j|$.¹⁴ Since pretoken lengths are bounded and small in practice, model size is also linear in the number of pretokens. Figure 4 shows that, empirically, the total time to build and solve the LP is quadratic in the number of split trees over the range we study. This modest scaling allows us to solve reasonably large models in practice that cover 99% of the aggregated counts of pretokens.¹⁵

Empirically, we find that the LP solutions have very few fractional variables, and that the objective of the rounded integer solution is extremely close to the LP bound. We consider 400k, 500k, 600k, or 700k split trees, and 32 vocabulary sizes ranging from 8,192 to 262,144. Across these 128 problem instances, the LP relaxation is nearly integral: in the worst case, only 66 x_i variables and 285 z_{jk} variables are fractional, corresponding to fewer than 0.012% and 0.004% of the variables in those instances, respectively. Let f_{LP}^* denote the optimal LP objective value, and let $\hat{f}$ denote the

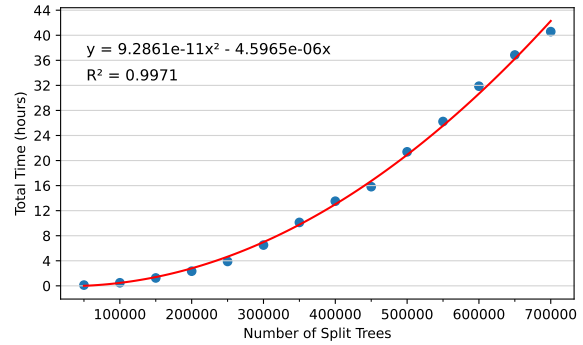


Figure 4: Total training time as a function of the number of split trees. In these runs the vocabulary size m is set to half the number of split trees.

objective value after rounding to an integer solution according to Section 4.3. Across the problem instances, the maximum absolute gap $\hat{f} - f_{LP}^*$ is 21,500 out of 37 billion, and the maximum relative gap $(\hat{f} - f_{LP}^*)/\hat{f}$ is 5.76×10^{-7} . In 44 of the 128 cases, the LP solution is fully integral.¹⁶ Overall, the LP relaxation is exceptionally tight. We conjecture this arises from the tree structure itself: on each root-to-leaf path, selecting a higher node always produces fewer tokens, giving the LP little incentive to assign fractional values across competing nodes on the same path.

6 Intrinsic Results

As seen in Figure 5, ToaST achieves substantial improvements in compression as measured by bytes per token. ToaST achieves a 7.5% improvement over the best baseline at a vocabulary size of 8,192, 10.5% at 24,576, and more than 11% for vocabulary sizes of 40,960 and larger. The ToaST results are very similar when varying the number of split trees from 400k to 700k, except at higher vocabulary sizes.¹⁷ Compression does improve very slightly with more split trees, which suggests one should use as many as is computationally feasible.

As shown in Table 3, tokens produced on the validation data can be divided into four categories. Root tokens encode a full pretoken, often as a semantically meaningful word, which is the ideal outcome. Unavoidable Leaves are single-byte pretokens (e.g., punctuation) with only one possible tokenization. Non-Leaf Subwords represent parts of less frequent words. Leaf tokens are single-byte

⁹Thus, the n -gram dictionary covers all 700,000 pretokens, each of which is a candidate root token in the vocabulary. Storing these n -grams and their counts requires approximately 708MB as a Python dict[bytes, int].

¹⁰<https://www.pyomo.org/>

¹¹<https://highs.dev/>

¹²Our code, including both training and split tree inference will be open sourced following review.

¹³<https://github.com/huggingface/tokenizers>

¹⁴See Section B.2 for details.

¹⁵The runs of Figure 4 were run independently on an AWS r7i.48xlarge instance, but note that it is possible to solve the same model over a range of vocabulary sizes in significantly less time using warm starts. See Section B.5 for details. This warm-start approach was used for the vocabulary range used in later figures.

¹⁶See Table 7 to Table 10 in Section E for the complete data on fractional variables and relaxation gaps.

¹⁷See Figure 12 in Section C for a zoomed-in chart for vocabularies of 196k or more.

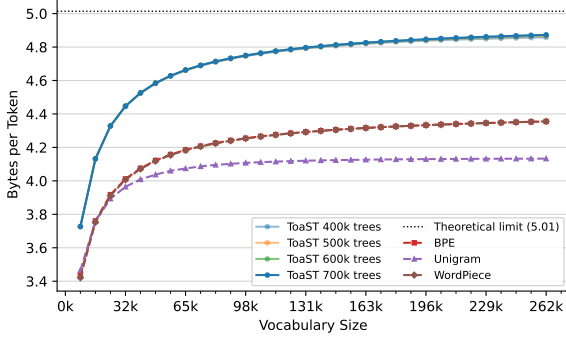


Figure 5: Validation data bytes per token for ToaST and several baselines, as a function of vocabulary size. Without the use of supermerges (Liu et al., 2025; Schmidt et al., 2025, 2026) there is an upper bound in which each pretoken is a single token, which is shown as a dotted line at 5.01 for the validation data.

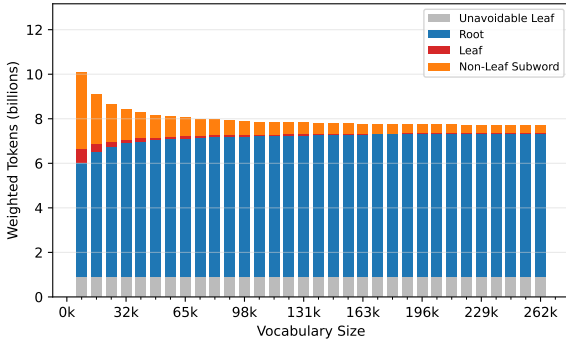


Figure 6: Stacked validation token categories for ToaST with 700k split trees by Leaf (single byte tokens), Unavoidable Leaf (single byte pretokens), Non-Leaf Subword, and Root nodes (single token for pretoken).

fallbacks within multi-token pretokens; they appear in too many contexts for the language model to learn a meaningful representation and are best avoided. We apply the same categorization to baseline methods by analogy.

Category	Tok in pretok	Bytes in tok
Root	1	2+
Unavoidable Leaf	1	1
Leaf	2+	1
Non-Leaf Subword	2+	2+

Table 3: Four categories of tokens produced during inference on the validation data.

Figure 6 shows validation counts of the four categories for ToaST,¹⁸ while Figure 7 gives the same results for BPE.¹⁹ ToaST has vastly fewer Leaf

¹⁸See Figure 13 in Section C for the same data on a log y scale.

¹⁹See Figure 14 and Figure 15 in Section C for these results

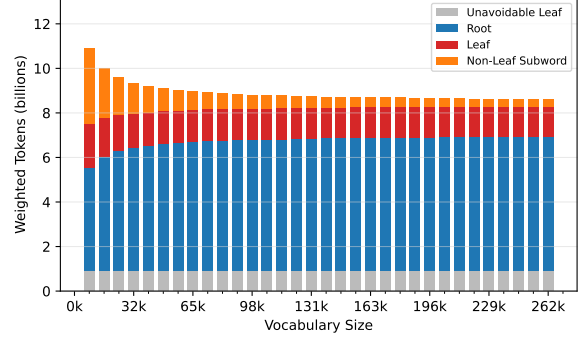


Figure 7: Validation token categories for BPE. Using the same categories as ToaST in Figure 6.

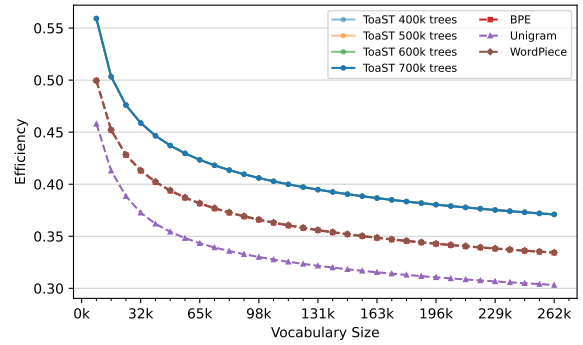


Figure 8: Validation Rényi efficiency ($\alpha = 2.5$) for ToaST and several baselines as a function of vocabulary size. Higher is better, indicating a more uniform token distribution. The four ToaST series are very similar to each other, as are BPE and WordPiece.

tokens than all baselines with a ~ 14 – 19 x reduction at a vocabulary size of 65,536. ToaST also produces substantially more Root tokens than the baselines. These extra Root tokens are possible because ToaST avoids the intermediate tokens used in BPE to reach high-frequency tokens, freeing up vocabulary space for more Roots.

Rényi efficiency measures how uniformly a tokenizer uses its vocabulary; with $\alpha = 2.5$ (Zouhar et al., 2023), it particularly penalizes very frequent tokens. Zouhar et al. (2023) suggests Rényi efficiency correlates with downstream performance, although Cognetta et al. (2024) and Dagan et al. (2024) offer differing views. Because ToaST dramatically reduces high-frequency Leaf tokens, it achieves substantially higher Rényi efficiency than the baselines (Figure 8).²⁰

for WordPiece and UnigramLM, respectively.

²⁰Figure 16 in Section C gives a Zipf plot confirming that ToaST has fewer high-frequency tokens in general. The Shannon efficiency with $\alpha = 1$ is also better; see Figure 17 in Section C.

	Metric	ToaST	BPE	Unigram	WordPiece
Base model	CORE	0.2632 $\pm$.0076	0.2446 $\pm$.0055	0.2500 $\pm$.0044	0.2566 $\pm$.0079
Supervised fine-tuning	ARC-Chall.	0.4744 $\pm$.0194	0.4917 $\pm$.0188	0.4998 $\pm$.0090	0.4945 $\pm$.0126
	ARC-Easy	0.6069 $\pm$.0365	0.6171 $\pm$.0092	0.6155 $\pm$.0124	0.6238 $\pm$.0173
	GSM8K	0.0747 $\pm$.0080	0.0578 $\pm$.0079	0.0741 $\pm$.0070	0.0667 $\pm$.0112
	HumanEval	0.1280 $\pm$.0086	0.1371 $\pm$.0079	0.1235 $\pm$.0219	0.1189 $\pm$.0145
	MMLU	0.3613 $\pm$.0029	0.3602 $\pm$.0050	0.3635 $\pm$.0033	0.3609 $\pm$.0022
	ChatCORE	0.3530 $\pm$.0139	0.3578 $\pm$.0089	0.3610 $\pm$.0058	0.3577 $\pm$.0094

Table 4: Downstream results (mean $\pm$ std, $n=4$).

7 Downstream Results

To evaluate downstream performance, we trained 4 replications of a depth 24 nanochat language model²¹ for ToaST and our baselines, varying the random seed across training replicates.²² With a vocabulary size of 40,960, each model had 1.56B parameters. Pretraining used the default ClimbMix-400B dataset (Diao et al., 2025). We replaced the normal nanochat tokenizer training process with the tokenizers we trained on CulturaX.

CORE, the primary downstream metric used by nanochat, is an average over 22 benchmarks (Li et al., 2025). As we see in Table 4, ToaST resulted in the best CORE score and the best individual score on 13 of the 22 tasks.²³ On CORE, ToaST significantly outperformed BPE by 7.6% ($p=0.009$) and Unigram by 5.3% ($p=0.032$), and beat WordPiece by 2.6% (not significant).²⁴ Since pretraining is token-matched on 5.9B tokens, ToaST’s superior compression means the language models trained with ToaST saw approximately 11% more text than BPE, which may account for the strong CORE performance. There is also a supervised fine tuning (SFT) phase that is not compute matched, giving ToaST fewer training steps due to its superior compression. On the six SFT tasks in the bottom of Table 4, Unigram—which has the worst compression—was best on three, despite winning only three of the 22 base tasks.

8 Conclusion

We presented ToaST, a tokenization method that constructs split trees from byte n -gram counts and selects a vocabulary by formulating an integer program (IP) that minimizes the total token count un-

der a recursive split tree inference procedure. The LP relaxation of this IP is very tight, with a worst-case optimality gap of less than one part per million across all instances tested, making the approach both principled and practical.

For vocabulary sizes of 40,960 and larger, ToaST achieves over 11% better compression than BPE, WordPiece, and UnigramLM, with dramatically fewer single-byte tokens and higher Rényi efficiency. These improvements stem from the global optimization: unlike greedy merge-based methods, ToaST selects tokens that collectively minimize the token count, avoiding the intermediate tokens that BPE retains as stepping stones to forming frequent words. ToaST had the best downstream performance on CORE by 2.6%–7.6% over baselines, significantly outperforming BPE and Unigram, and was best on 13 of 22 individual tasks.

Split tree construction is decoupled from vocabulary selection: the trees are built once from corpus statistics, and the IP finds an optimal vocabulary regardless of how they were constructed. This separation means the splitting procedure can be extended with a hierarchy of preferences without changing the vocabulary optimization. For example, one can prefer superwords, then morpheme-aligned splits, then character boundary splits, then byte-level splits. Similarly, the linear cost objective can be reweighted to give equal influence to each language on a multilingual dataset, directly addressing tokenization premiums (Petrov et al., 2023; Arnett et al., 2024) for low-resource languages. We sketch these extensions in detail in Section A.

Limitations

Our experiments were conducted exclusively on English text, and it is not clear how these results will extend to other languages. Training on the top aggregated pretokens may be less effective in other languages, especially non-space-delimited ones, as they would cover a lower fraction of the

²¹<https://github.com/karpathy/nanochat>

²²These models were trained on an AWS p4de.24xlarge instance with 8xA100 80GB GPUs, taking approximately 9 hours each.

²³See Table 6 in Section D for the individual CORE task scores.

²⁴Welch’s t-test, $n=4$.

total pretoken counts.

LLM Use Disclosure

We used Claude Code Opus 4.6 (Anthropic, 2026) to help with the implementation of the code, before manually verifying its correctness. The LLM was also used to write the Python scripts to generate the figures in this paper, and to improve wording at a paragraph level.

Acknowledgments

This research was supported in part by the Israel Science Foundation (grant No. 1166/23).

References

- Orevaoghene Ahia, Sachin Kumar, Hila Gonen, Jungo Kasai, David Mortensen, Noah Smith, and Yulia Tsvetkov. 2023. [Do all languages cost the same? tokenization in the era of commercial language models](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 9904–9923, Singapore. Association for Computational Linguistics.
- Mehdi Ali, Michael Fromm, Klaudia Thellmann, Richard Rutmann, Max Lübbering, Johannes Levelling, Katrin Klug, Jan Ebert, Niclas Doll, Jasper Buschhoff, Charvi Jain, Alexander Weber, Lena Jurkschat, Hammam Abdelwahab, Chelsea John, Pedro Ortiz Suarez, Malte Ostendorff, Samuel Weinbach, Rafet Sifa, and 2 others. 2024. [Tokenizer choice for LLM training: Negligible or crucial?](#) In *Findings of the Association for Computational Linguistics: NAACL 2024*, pages 3907–3924, Mexico City, Mexico. Association for Computational Linguistics.
- Anthropic. 2026. [Claude Opus 4.6](#).
- Catherine Arnett, Tyler A. Chang, and Benjamin Bergen. 2024. [A bit of a problem: Measurement disparities in dataset sizes across languages](#). In *Proceedings of the 3rd Annual Meeting of the Special Interest Group on Under-resourced Languages @ LREC-COLING 2024*, pages 1–9, Torino, Italia. ELRA and ICCL.
- Duygu Ataman and Marcello Federico. 2018. [Compositional representation of morphologically-rich input for neural machine translation](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 305–311, Melbourne, Australia. Association for Computational Linguistics.
- Kaj Bostrom and Greg Durrett. 2020. [Byte pair encoding is suboptimal for language model pretraining](#). In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 4617–4624, Online. Association for Computational Linguistics.
- Michael L. Bynum, Gabriel A. Hackebeitl, William E. Hart, Carl D. Laird, Bethany L. Nicholson, John D. Sirola, Jean-Paul Watson, and David L. Woodruff. 2021. *Pyomo—optimization modeling in python*, third edition, volume 67. Springer Science & Business Media.
- Geoffrey Churchill and Steven Skiena. 2026. [Reducing tokenization premiums for low-resource languages](#). *Preprint*, arXiv:2601.13328.
- Marco Cognetta, Vilém Zouhar, Sangwhan Moon, and Naoaki Okazaki. 2024. [Two counterexamples to tokenization and the noiseless channel](#). In *Proceedings of the 2024 Joint International Conference on Computational Linguistics, Language Resources and Evaluation (LREC-COLING 2024)*, pages 16897–16906, Torino, Italia. ELRA and ICCL.
- Gautier Dagan, Gabriel Synnaeve, and Baptiste Roziere. 2024. [Getting the most out of your tokenizer for pre-training and domain adaptation](#). In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pages 9784–9805. PMLR.
- Shizhe Diao, Yu Yang, Yonggan Fu, Xin Dong, Dan Su, Markus Kliegl, Zijia Chen, Peter Belcak, Yoshi Suhara, Hongxu Yin, Mostofa Patwary, Yingyan, Lin, Jan Kautz, and Pavlo Molchanov. 2025. [Nemotron-climb: Clustering-based iterative data mixture bootstrapping for language model pre-training](#). *Preprint*, arXiv:2504.13161.
- Aradhya Dixit and Shreem Dixit. 2026. [The script tax: Measuring tokenization-driven efficiency and latency disparities in multilingual language models](#). *Preprint*, arXiv:2602.11174.
- Negar Foroutan, Clara Meister, Debjit Paul, Joel Niklaus, Sina Ahmadi, Antoine Bosselut, and Rico Sennrich. 2025. [Parity-aware byte-pair encoding: Improving cross-lingual fairness in tokenization](#). *Preprint*, arXiv:2508.04796.
- Philip Gage. 1994. A new algorithm for data compression. *The C Users Journal*, 12(2):23–38.
- Matthias Gallé. 2019. [Investigating the effectiveness of BPE: The power of shorter sequences](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 1375–1381, Hong Kong, China. Association for Computational Linguistics.
- Michael R. Garey and David S. Johnson. 1979. *Computers and Intractability: A Guide to the Theory of NP-Completeness*. W. H. Freeman.
- Omer Goldman, Avi Caciularu, Matan Eyal, Kris Cao, Idan Szpektor, and Reut Tsarfaty. 2024. [Unpacking tokenization: Evaluating text compression and its correlation with model performance](#). In *Findings of the Association for Computational Linguistics: ACL*

- 2024, pages 2274–2286, Bangkok, Thailand. Association for Computational Linguistics.
- William E Hart, Jean-Paul Watson, and David L Woodruff. 2011. Pyomo: modeling and solving mathematical programs in python. *Mathematical Programming Computation*, 3(3):219–260.
- Valentin Hofmann, Janet Pierrehumbert, and Hinrich Schütze. 2021. [Superbizarre is not superb: Derivational morphology improves BERT’s interpretation of complex words](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 3594–3608, Online. Association for Computational Linguistics.
- Valentin Hofmann, Hinrich Schuetze, and Janet Pierrehumbert. 2022. [An embarrassingly simple method to mitigate undesirable properties of pretrained language model tokenizers](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 385–393, Dublin, Ireland. Association for Computational Linguistics.
- Q. Huangfu and J. A. J. Hall. 2018. [Parallelizing the dual revised simplex method](#). *Mathematical Programming Computation*, 10(1):119–142.
- Eugene Jang, Kimin Lee, Jin-Woo Chung, Keuntae Park, and Seungwon Shin. 2025. [Improbable bigrams expose vulnerabilities of incomplete tokens in byte-level tokenizers](#). In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pages 18209–18216, Suzhou, China. Association for Computational Linguistics.
- Richard M. Karp. 1972. Reducibility among combinatorial problems. In Raymond E. Miller and James W. Thatcher, editors, *Complexity of Computer Computations*, pages 85–103. Plenum Press, New York.
- Violeta Kastreva, Philip Whittington, Dennis Komm, and Tiago Pimentel. 2025. [Tokenisation over bounded alphabets is hard](#). *Preprint*, arXiv:2511.15709.
- Taku Kudo. 2018. [Subword regularization: Improving neural network translation models with multiple subword candidates](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 66–75, Melbourne, Australia. Association for Computational Linguistics.
- Sander Land and Catherine Arnett. 2025. [Bpe stays on script: Structured encoding for robust multilingual pretokenization](#). *Preprint*, arXiv:2505.24689.
- Sander Land and Max Bartolo. 2024. [Fishing for magikarp: Automatically detecting under-trained tokens in large language models](#). In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 11631–11646, Miami, Florida, USA. Association for Computational Linguistics.
- Jeffrey Li, Alex Fang, Georgios Smyrnis, Maor Ivgi, Matt Jordan, Samir Gadre, Hritik Bansal, Etash Guha, Sedrick Keh, Kushal Arora, Saurabh Garg, Rui Xin, Niklas Muennighoff, Reinhard Heckel, Jean Mercat, Mayee Chen, Suchin Gururangan, Mitchell Wortsman, Alon Albalak, and 40 others. 2025. [Datacomp-lm: In search of the next generation of training sets for language models](#). *Preprint*, arXiv:2406.11794.
- Jia Peng Lim, Shawn Tan, Davin Choo, and Hady W. Lauw. 2025. A partition cover approach to tokenization. In *The Thirty-ninth Annual Conference on Neural Information Processing Systems*.
- Tomasz Limisiewicz, Terra Blevins, Hila Gonen, Orevaoghene Ahia, and Luke Zettlemoyer. 2024. [MYTE: Morphology-driven byte encoding for better and fairer multilingual language modeling](#). In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 15059–15076, Bangkok, Thailand. Association for Computational Linguistics.
- Alisa Liu, Jonathan Hayase, Valentin Hofmann, Sewoong Oh, Noah A. Smith, and Yejin Choi. 2025. [SuperBPE: Space travel for language models](#). In *Second Conference on Language Modeling*.
- Jessica M. Lundin, Ada Zhang, Nihal Karim, Hamza Louzan, Guohao Wei, David Ifeoluwa Adelani, and Cody Carroll. 2026. [The token tax: Systematic bias in multilingual tokenization](#). In *Proceedings of the 7th Workshop on African Natural Language Processing (AfricaNLP 2026)*, page 103–112. Association for Computational Linguistics.
- Thuat Nguyen, Chien Van Nguyen, Viet Dac Lai, Hieu Man, Nghia Trung Ngo, Franck Dernoncourt, Ryan A. Rossi, and Thien Huu Nguyen. 2024. [CulturaX: A cleaned, enormous, and multilingual dataset for large language models in 167 languages](#). In *Proceedings of the 2024 Joint International Conference on Computational Linguistics, Language Resources and Evaluation (LREC-COLING 2024)*, pages 4226–4237, Torino, Italia. ELRA and ICCL.
- Hyunji Hayley Park, Katherine J. Zhang, Coleman Haley, Kenneth Steimel, Han Liu, and Lane Schwartz. 2021. [Morphology matters: A multilingual language modeling analysis](#). *Transactions of the Association for Computational Linguistics*, 9:261–276.
- Aleksandar Petrov, Emanuele La Malfa, Philip H. S. Torr, and Adel Bibi. 2023. [Language model tokenizers introduce unfairness between languages](#). *Preprint*, arXiv:2305.15425.
- Varshini Reddy, Craig W Schmidt, Yuval Pinter, and Chris Tanner. 2026. [How much is enough? the diminishing returns of tokenization training data](#). In *Tokenization Workshop*.

- Phillip Rust, Jonas Pfeiffer, Ivan Vulić, Sebastian Ruder, and Iryna Gurevych. 2021. [How good is your tokenizer? on the monolingual performance of multilingual language models](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 3118–3135, Online. Association for Computational Linguistics.
- Craig W Schmidt, Varshini Reddy, Chris Tanner, and Yuval Pinter. 2025. [Boundless byte pair encoding: Breaking the pre-tokenization barrier](#). In *Second Conference on Language Modeling*.
- Craig W Schmidt, Varshini Reddy, Haoran Zhang, Alec Alameddine, Omri Uzan, Yuval Pinter, and Chris Tanner. 2024. [Tokenization is more than compression](#). In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 678–702, Miami, Florida, USA. Association for Computational Linguistics.
- Craig W. Schmidt, Chris Tanner, and Yuval Pinter. 2026. [Faster superword tokenization](#). *Preprint*, arXiv:2604.05192.
- Mike Schuster and Kaisuke Nakajima. 2012. [Japanese and korean voice search](#). In *2012 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 5149–5152.
- Rico Sennrich, Barry Haddow, and Alexandra Birch. 2016. [Improving neural machine translation models with monolingual data](#). In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 86–96, Berlin, Germany. Association for Computational Linguistics.
- Hailay Kidu Teklehaymanot and Wolfgang Nejdl. 2025. [Tokenization disparities as infrastructure bias: How subword systems create inequities in llm access and efficiency](#). *Preprint*, arXiv:2510.12389.
- Omri Uzan, Craig W. Schmidt, Chris Tanner, and Yuval Pinter. 2024. [Greed is all you need: An evaluation of tokenizer inference methods](#). In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 813–822, Bangkok, Thailand. Association for Computational Linguistics.
- Philip Whittington, Gregor Bachmann, and Tiago Pimentel. 2025. [Tokenisation is NP-complete](#). In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 28133–28153, Vienna, Austria. Association for Computational Linguistics.
- Yonghui Wu, Mike Schuster, Zhifeng Chen, Quoc V. Le, Mohammad Norouzi, Wolfgang Macherey, Maxim Krikun, Yuan Cao, Qin Gao, Klaus Macherey, Jeff Klingner, Apurva Shah, Melvin Johnson, Xiaobing Liu, Łukasz Kaiser, Stephan Gouws, Yoshikiyo Kato, Taku Kudo, Hideto Kazawa, and 12 others. 2016. [Google’s neural machine translation system: Bridging the gap between human and machine translation](#). *Preprint*, arXiv:1609.08144.
- Shaked Yehezkel and Yuval Pinter. 2023. [Incorporating context into subword vocabularies](#). In *Proceedings of the 17th Conference of the European Chapter of the Association for Computational Linguistics*, pages 623–635, Dubrovnik, Croatia. Association for Computational Linguistics.
- George Kingsley Zipf. 1949. *Human Behavior and the Principle of Least Effort*. Addison-Wesley.
- Vilém Zouhar, Clara Meister, Juan Gastaldi, Li Du, Mrinmaya Sachan, and Ryan Cotterell. 2023. [Tokenization and the noiseless channel](#). In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 5184–5207, Toronto, Canada. Association for Computational Linguistics.

A Extensions and Future Work

Since split tree construction is independent of vocabulary selection, it is very flexible: any procedure that produces binary trees can be used, potentially with multiple sources of external data. While we suggest a procedure based on byte n -gram counts (choosing the split maximizing $\min(c_p, c_{p'})$), there are natural extensions. Common pretoken combinations could be combined into superwords (Liu et al., 2025; Schmidt et al., 2025, 2026) that are represented as a single split tree. Morphemes are the smallest linguistically meaningful units of words, and ideally these units should be preserved whenever possible (Ataman and Federico, 2018; Bostrom and Durrett, 2020; Park et al., 2021; Hofmann et al., 2021, 2022; Limisiewicz et al., 2024). Many scripts use multiple bytes to represent a character, and it is preferable to not split within the multi-byte characters (Land and Arnett, 2025; Land and Bartolo, 2024; Jang et al., 2025). Such a hierarchy of preferences can easily be incorporated into the split tree construction.

Figure 9 gives an example of this hierarchy. The phrase `_crème_brûlée` could form a two-word superword. Within the pretoken `_brûlée`, a morphological analysis would suggest a split between `_brûl` and `ée`. The phrase’s three two-byte characters should not be split in between the bytes. Finally, at the lowest level, we have the regular byte splits we have previously discussed in split trees. At each node, the split is chosen from the highest available level in the preference hierarchy, using the $\min(c_p, c_{p'})$ criterion from Section 2 to select among splits within a level. All results in this paper

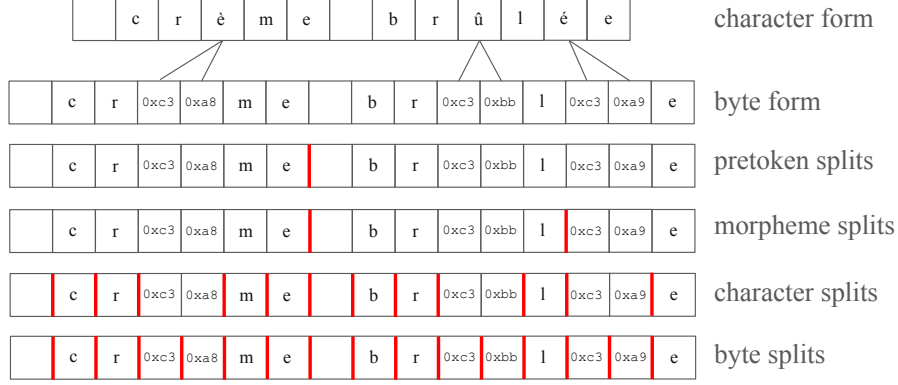


Figure 9: Example split hierarchy of pretokens $\succ$ morphemes $\succ$ characters $\succ$ bytes for *crème brûlée*.

use the multi-byte character level, as it requires no additional external data, although its effect on English is minimal since English text is almost entirely single-byte characters. Pretoken n -grams for superword construction and gold morpheme splits could be added to support the other levels.

The vocabulary construction process can also be customized, as the explicit linear objective in Eq (5) allows different c_j values to be used. As one example, multilingual tokenizers often disproportionately favor languages with the most training data. This problem has been widely studied (Rust et al., 2021; Ahia et al., 2023; Petrov et al., 2023; Arnett et al., 2024; Ali et al., 2024; Teklehaymanot and Nejd, 2025; Dixit and Dixit, 2026; Lundin et al., 2026) with a number of proposed solutions (Foroutan et al., 2025; Churchill and Skiena, 2026). Similarly to how imbalanced classification is often addressed by upweighting the cost coefficients of minority classes, one could scale the c_j so that the total weight per language is equal, giving each language equal influence in the optimization.

B Additional Computational Results

B.1 Count Distribution of Pretokens

Table 5 gives the percent of cumulative total counts of unique pretokens for various numbers of split trees. While there are 58,469,075 unique pretokens in the CulturaX training data, the 700k most frequent pretokens cover more than 99% of the total counts. At the smallest level of 400k split trees considered in Section 6, there was 98.64% coverage.

B.2 LP Model Size

Each split tree for pretoken j is a full binary tree with $|L_j|$ leaves (one per byte), giving exactly $|K_j| = 2|L_j| - 1$ nodes. The model has $|I|$ vari-

ables x_i (one per unique candidate token across all trees) and $\sum_j (2|L_j| - 1)$ variables z_{jk} (one per node). The constraints consist of one vocabulary size constraint, $\sum_j (2|L_j| - 1)$ link constraints (Eq (9)), and $\sum_j |L_j|$ leaf coverage constraints (Eq (8)), for a total of $1 + \sum_j (3|L_j| - 1)$ constraints. Since each unique token candidate corresponds to at least one tree node, $|I| \leq \sum_j (2|L_j| - 1) + |B|$, both the number of variables and constraints are linear in the total byte-length of the pretokens $\sum_j |L_j|$. Typically $|I|$ is much smaller than this bound due to candidate tokens being shared across many trees. As we see in the following section, the length of our pretokens is bounded and small in practice, so model size is also linear in the number of pretokens used in training.

B.3 Pre-tokenization Regular Expression

We use the length-limited variant of the standard GPT-4o regular expressions (regex) shown in Listing 2 to avoid very large trees resulting from long runs of whitespace. To limit the length of the resulting match, we replace $*$ with $\{0, 32\}$ for words or $\{0, 16\}$ for other branches. We also replace $+$ with $\{1, 32\}$ for words or $\{1, 16\}$ for other branches. We give the standard GPT-4o regex for comparison.²⁵

B.4 Split tree inference speed

On a MacBook Pro, split tree inference in Python achieves approximately 600k tokens/s compared to 1,000k tokens/s for the Rust-based Hugging Face BPE implementation, only a factor of 1.6x slower. This competitiveness is partly because inference frequently terminates at the root node — when the full pretoken is in the vocabulary, no recursion is needed.

²⁵From https://github.com/openai/tiktoken/blob/4560a889/tiktoken_ext/openai_public.py#L101-L114.

Pretokens	Running Sum	Cumulative %
10,000	30,187,095,725	86.50%
20,000	31,762,559,765	91.01%
50,000	33,170,977,653	95.05%
100,000	33,801,910,552	96.85%
200,000	34,188,646,490	97.96%
300,000	34,341,585,733	98.40%
400,000	34,427,201,031	98.64%
500,000	34,483,299,331	98.81%
600,000	34,523,691,216	98.92%
700,000	34,554,477,609	99.01%
800,000	34,578,973,085	99.08%
900,000	34,599,106,503	99.14%
1,000,000	34,616,038,004	99.19%
2,000,000	34,706,353,801	99.44%
5,000,000	34,785,981,428	99.67%
10,000,000	34,826,964,370	99.79%
20,000,000	34,857,292,526	99.88%
50,000,000	34,891,739,261	99.98%
⋮		
58,469,075	34,900,208,336	100.00%

Table 5: Cumulative weighted count of unique pre-token types in CulturaX English training data, ranked by frequency. The top 700k pretokens cover 99% of all occurrences.

```

# length limited GPT-4o pattern
# limit punctuation and spaces to runs
# of no more than 16 characters
# and words to 32 characters (68 in the worse case)
# in practice it matches no more than 65 characters
GPT40_REGEX_16 = "|".join([
    r"^[^\\r\\n\\p{L}\\p{N}]?\\p{Lu}\\p{Lt}\\p{Lm}\\p{Lo}\\p{M}]{0,32}\\p{L}\\p{Lm}\\p{Lo}\\p{M}]{1,32}(?:'s|'t|'re|'ve|'m|'ll|'d)?",
    r"^[^\\r\\n\\p{L}\\p{N}]?\\p{Lu}\\p{Lt}\\p{Lm}\\p{Lo}\\p{M}]{1,32}\\p{L}\\p{Lm}\\p{Lo}\\p{M}]{0,32}(?:'s|'t|'re|'ve|'m|'ll|'d)?",
    r"\\p{N}{1,3}",
    r"^[^\\s\\p{L}\\p{N}]{1,16}[\\r\\n/]{0,16}",
    r"\\s{0,15}[\\r\\n]{1,16}",
    r"\\s{1,16}(?!\\s)",
    r"\\s{1,16}",
])

# GPT-4o pattern for comparison
GPT40_REGEX = "|".join([
    r"^[^\\r\\n\\p{L}\\p{N}]?\\p{Lu}\\p{Lt}\\p{Lm}\\p{Lo}\\p{M}]*\\p{L}\\p{Lm}\\p{Lo}\\p{M}]{1,32}(?:'s|'t|'re|'ve|'m|'ll|'d)?",
    r"^[^\\r\\n\\p{L}\\p{N}]?\\p{Lu}\\p{Lt}\\p{Lm}\\p{Lo}\\p{M}]*\\p{L}\\p{Lm}\\p{Lo}\\p{M}]{1,32}(?:'s|'t|'re|'ve|'m|'ll|'d)?",
    r"\\p{N}{1,3}",
    r"^[^\\s\\p{L}\\p{N}]+[\\r\\n/]*",
    r"\\s*[\\r\\n]+",
    r"\\s+(?!\\s)",
    r"\\s+",
])

```

Listing 2: We use a length limited variant of the standard GPT-4o regular expressions (regex) to avoid very large trees resulting from long runs of whitespace.

B.5 Resolving Multiple Vocabulary Sizes

The specified vocabulary size m appears in the LP only through the right-hand side of Eq (6). This makes it efficient to solve the model for a range of vocabulary sizes. We first solve the LP for the largest value, $m = 262,144$, which takes 12–23 hours depending on the number of split trees. We then decrease m and re-solve using a warm start, reusing the previous optimal basis as the starting point, which allows the solver to converge much faster than solving from scratch. Under dual simplex, the previous optimal basis remains dual feasible since only the right-hand side of Eq (6) changes, although it is no longer primal feasible for the smaller value of m . Dual simplex can then efficiently re-optimize from this basis, which is substantially cheaper than solving each LP from scratch.

Figure 10 gives the cumulative total time to set up and solve the model, as a function of the number of vocabulary sizes computed. Starting from the largest vocabulary size $m = 262,144$, we reduce the size by 8,192 and resolve the LP using a warm start. This continues down to the smallest vocabulary size of 8,192. The time for subsequent resolves is much reduced to less than an hour because of the warm start. The 700k split tree problem took notably longer at vocabulary sizes of 16,384 and 8,192, a pattern that was consistent across two independent runs. We do not have a clear explanation for this behavior.

Figure 11 gives the individual timing of each resolve step, with the same setup as Figure 10, with a log scale on the y -axis solve time. In all runs, the times decrease as the vocabulary size decreases until it reaches a size of 40,960. The times then increase again to the smallest sizes.

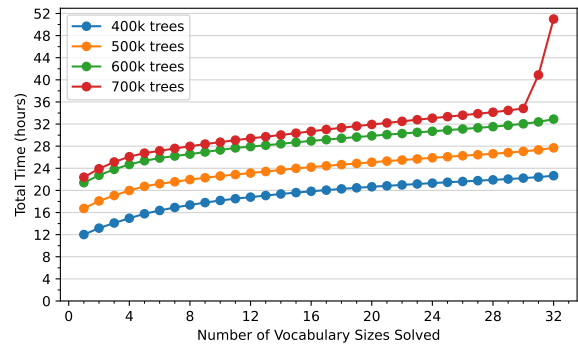


Figure 10: Cumulative total time to set up and solve the model, as a function of the number of vocabulary sizes computed.

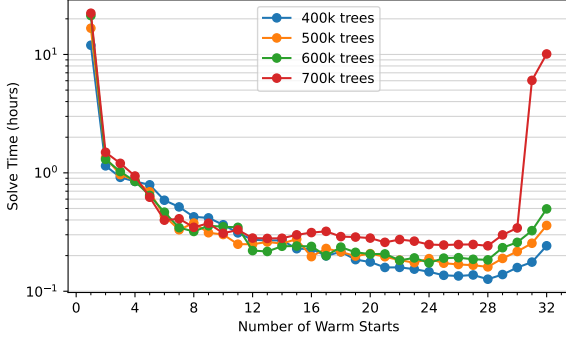


Figure 11: Individual timing of each resolve step, with the same setup as Figure 10, with a log scale on the y -axis solve time. Set up time is included in the first point.

C Additional Intrinsic Metrics

Figure 12 shows the spread in compression as the number of split trees is varied, at the upper end of vocabulary sizes where this spread is largest. While the improvement in compression is small in absolute terms, using more split trees is better in all cases.

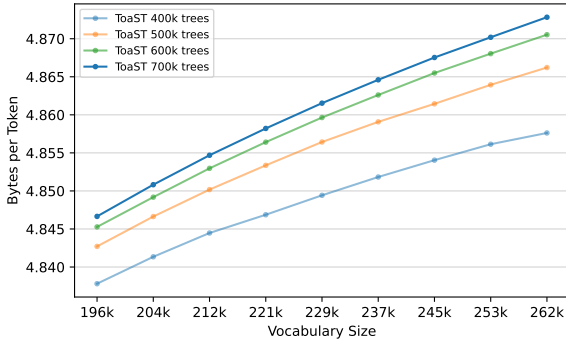


Figure 12: Validation bytes per token of ToaST, zoomed in for larger vocabulary sizes.

Figure 13 shows the counts of the four categories of tokens on validation data. While not visible in the linear-scale graph in Figure 6, the counts of Leaves and Non-Leaf Subword categories continue to decrease as the vocabulary size increases, while the number of Root tokens increases.

Figure 14 and Figure 15 show the four token categories for WordPiece and UnigramLM, respectively. Much like BPE in Figure 7, these have a significant number of Leaf or single byte tokens compared to ToaST (Figure 6).

Figure 16 gives a Zipf plot comparison of ToaST with BPE, WordPiece, and UnigramLM. ToaST has fewer very-frequent tokens compared to the baselines, and also has fewer very-infrequent tokens,

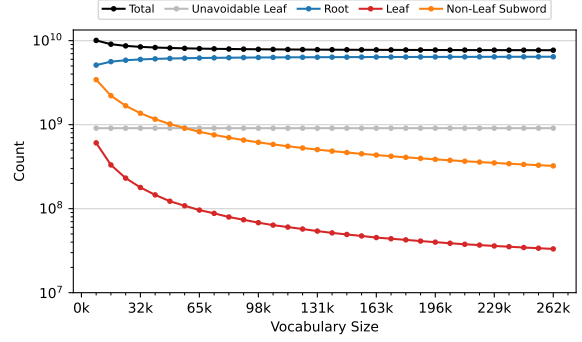


Figure 13: Validation counts for ToaST with 700k split trees by Leaf (single byte tokens), Unavoidable Leaf (single-byte pretokens), Non-Leaf Subword, and Root nodes (single token for pretoken), on a log scale.

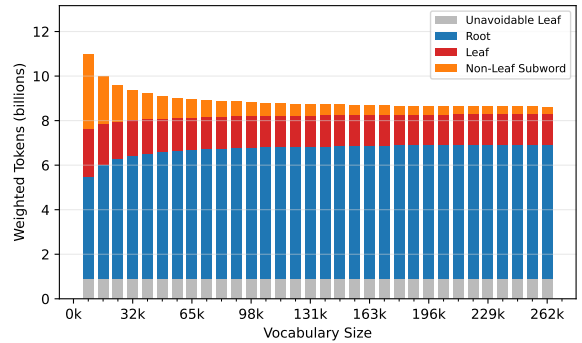


Figure 14: Token categories for WordPiece, using the same categories as ToaST.

with a minimum count on the validation data of 103 for ToaST versus 4 for UnigramLM and 1 for BPE and WordPiece.²⁶

Figure 17 shows that the Shannon efficiency, which corresponds to a Rényi efficiency with $\alpha = 1$, is higher for ToaST than for the baselines.

Figure 18 shows a Venn diagram of the vocabulary overlap on the validation data of ToaST, BPE and UnigramLM at a vocabulary size of 128k. While 42,363 tokens are shared by all three, UnigramLM is the most distinctive, with 75,331 (57%) of its tokens unique to it. In comparison, ToaST has 20,556 unique tokens, while BPE has 15,272.

D Downstream CORE Scores

CORE is the primary downstream metric used by nanochat, which is an average over 22 benchmarks (Li et al., 2025) shown in Table 6. CORE is evaluated both on the base model and a supervised fine

²⁶At a vocabulary size of 128k, ToaST has just 6 unused tokens over the 37.5GB of validation data, which are all rare single bytes added to avoid unknown tokens. The baseline models have 24–92 unused tokens.

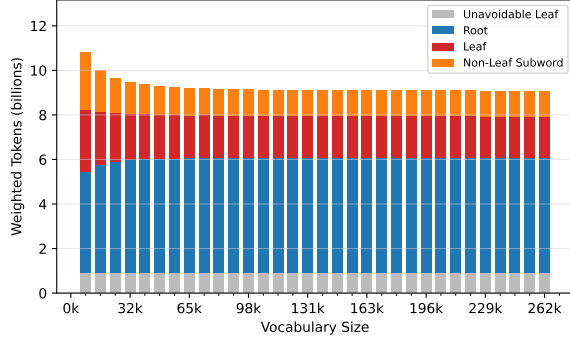


Figure 15: Token categories for UnigramLM, using the same categories as ToaST.

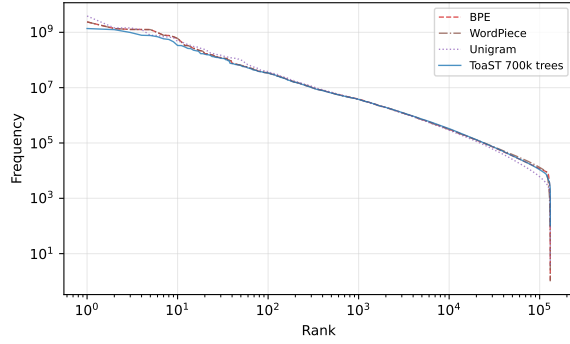


Figure 16: Zipf plot of the validation token frequency vs. token rank for ToaST, BPE, WordPiece, and UnigramLM with 128k vocabularies.

tuning (SFT) version. It also includes a number of SFT metrics.

E Relaxation Gap

Table 7 through Table 10 give statistics about the relaxation gap for various numbers of pretokens and vocabulary sizes.

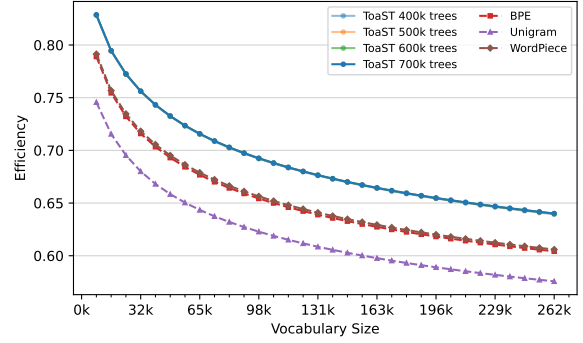


Figure 17: Validation Shannon efficiency ($\alpha = 1$).

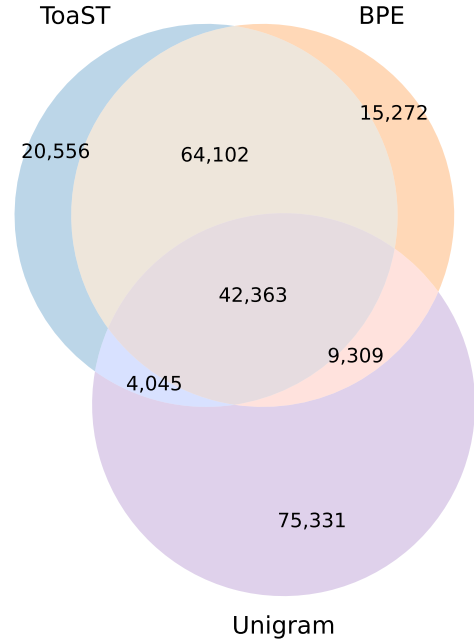


Figure 18: Venn diagram of overlap in the tokens used in the tokenization of the validation data, with a 128k vocabulary.

Metric	Stage	ToaST	BPE	Unigram	WordPiece
CORE	BASE	0.2632 $\pm$.0076	0.2446 $\pm$.0055	0.2500 $\pm$.0044	0.2566 $\pm$.0079
hellaswag_zeroshot	BASE	0.3992 $\pm$.0018	0.3406 $\pm$.0034	0.3891 $\pm$.0043	0.3444 $\pm$.0060
jeopardy	BASE	0.0941 $\pm$.0087	0.1122 $\pm$.0061	0.1040 $\pm$.0070	0.1208 $\pm$.0086
bigbench_qa_wikidata	BASE	0.4653 $\pm$.0077	0.4678 $\pm$.0119	0.4494 $\pm$.0098	0.4663 $\pm$.0116
arc_easy	BASE	0.5640 $\pm$.0064	0.5297 $\pm$.0059	0.5591 $\pm$.0048	0.5368 $\pm$.0113
arc_challenge	BASE	0.1820 $\pm$.0091	0.1376 $\pm$.0110	0.1800 $\pm$.0047	0.1462 $\pm$.0136
copa	BASE	0.3400 $\pm$.0849	0.2300 $\pm$.0416	0.3200 $\pm$.0432	0.3100 $\pm$.0383
commonsense_qa	BASE	0.0819 $\pm$.0737	0.0525 $\pm$.0268	0.0835 $\pm$.0428	0.0917 $\pm$.0757
piqa	BASE	0.4886 $\pm$.0064	0.4785 $\pm$.0016	0.4725 $\pm$.0082	0.4739 $\pm$.0066
openbook_qa	BASE	0.2074 $\pm$.0073	0.2140 $\pm$.0124	0.2193 $\pm$.0093	0.2060 $\pm$.0046
lambada_openai	BASE	0.4249 $\pm$.0044	0.4245 $\pm$.0053	0.4058 $\pm$.0055	0.4236 $\pm$.0029
hellaswag	BASE	0.4071 $\pm$.0041	0.3483 $\pm$.0038	0.3931 $\pm$.0035	0.3528 $\pm$.0033
winograd	BASE	0.3554 $\pm$.0169	0.3297 $\pm$.0211	0.3260 $\pm$.0333	0.3407 $\pm$.0392
winogrande	BASE	0.1346 $\pm$.0226	0.1140 $\pm$.0184	0.1299 $\pm$.0108	0.1389 $\pm$.0039
bigbench_dyck_languages	BASE	0.1593 $\pm$.0257	0.1427 $\pm$.0266	0.0512 $\pm$.0325	0.1030 $\pm$.0130
agi_eval_lsar	BASE	0.0802 $\pm$.0489	0.0543 $\pm$.0329	0.0611 $\pm$.0359	0.0543 $\pm$.0160
bigbench_cs_algorithms	BASE	0.4333 $\pm$.0181	0.4174 $\pm$.0259	0.3875 $\pm$.0210	0.4307 $\pm$.0255
bigbench_operators	BASE	0.1726 $\pm$.0157	0.1619 $\pm$.0227	0.1857 $\pm$.0134	0.1750 $\pm$.0192
bigbench_repeat_copy_logic	BASE	0.0390 $\pm$.0157	0.0000 $\pm$.0000	0.0078 $\pm$.0156	0.0312 $\pm$.0000
squad	BASE	0.4435 $\pm$.0460	0.4381 $\pm$.0271	0.4428 $\pm$.0117	0.4323 $\pm$.0262
coqa	BASE	0.3103 $\pm$.0071	0.3156 $\pm$.0085	0.3258 $\pm$.0120	0.3092 $\pm$.0090
boolq	BASE	-0.1705 $\pm$.0831	-0.1078 $\pm$.0338	-0.1709 $\pm$.1338	-0.0208 $\pm$.0664
bigbench_language_id	BASE	0.1789 $\pm$.0059	0.1802 $\pm$.0052	0.1784 $\pm$.0028	0.1782 $\pm$.0033
ARC-Challenge	SFT	0.4744 $\pm$.0194	0.4917 $\pm$.0188	0.4998 $\pm$.0090	0.4945 $\pm$.0126
ARC-Easy	SFT	0.6069 $\pm$.0365	0.6171 $\pm$.0092	0.6155 $\pm$.0124	0.6238 $\pm$.0173
GSM8K	SFT	0.0747 $\pm$.0080	0.0578 $\pm$.0079	0.0741 $\pm$.0070	0.0667 $\pm$.0112
HumanEval	SFT	0.1280 $\pm$.0086	0.1371 $\pm$.0079	0.1235 $\pm$.0219	0.1189 $\pm$.0145
MMLU	SFT	0.3613 $\pm$.0029	0.3602 $\pm$.0050	0.3635 $\pm$.0033	0.3609 $\pm$.0022
SpellingBee	SFT	0.9922 $\pm$.0032	0.9932 $\pm$.0037	0.9971 $\pm$.0020	0.9883 $\pm$.0071
ChatCORE	SFT	0.3530 $\pm$.0139	0.3578 $\pm$.0089	0.3610 $\pm$.0058	0.3577 $\pm$.0094

Table 6: Detailed downstream performance (mean $\pm$ std, $n=4$) of all methods (40,960 vocab) on a nanochat depth-24 (1.5B param) model. Best mean per row in bold.

$ V $	x -vars	z -vars	frac- x	frac- z	$\hat{f}$	Δ	δ
8,192	478,647	5,693,790	0	0	44,898,180,556	0	0
16,384	478,647	5,693,790	0	0	40,490,452,286	0	0
24,576	478,647	5,693,790	0	0	38,670,470,194	0	0
32,768	478,647	5,693,790	0	0	37,666,946,583	0	0
40,960	478,647	5,693,790	4	67	37,023,027,109	10,893	2.942×10^{-7}
49,152	478,647	5,693,790	4	66	36,573,020,225	1,696	4.637×10^{-8}
57,344	478,647	5,693,790	0	0	36,243,579,311	0	0
65,536	478,647	5,693,790	4	37	35,991,861,347	4,028	1.119×10^{-7}
73,728	478,647	5,693,790	4	37	35,794,124,507	4,028	1.125×10^{-7}
81,920	478,647	5,693,790	4	37	35,633,845,353	4,028	1.130×10^{-7}
90,112	478,647	5,693,790	0	0	35,501,503,533	0	0
98,304	478,647	5,693,790	4	55	35,390,309,378	3,525	9.960×10^{-8}
106,496	478,647	5,693,790	0	0	35,295,748,262	0	0
114,688	478,647	5,693,790	0	0	35,214,171,930	0	0
122,880	478,647	5,693,790	0	0	35,142,911,421	0	0
131,072	478,647	5,693,790	4	39	35,080,188,458	28	7.982×10^{-10}
139,264	478,647	5,693,790	4	28	35,024,516,131	848	2.421×10^{-8}
147,456	478,647	5,693,790	4	19	34,974,792,201	1,471	4.206×10^{-8}
155,648	478,647	5,693,790	14	81	34,930,085,827	6,397	1.831×10^{-7}
163,840	478,647	5,693,790	12	75	34,889,641,006	4,789	1.373×10^{-7}
172,032	478,647	5,693,790	4	18	34,852,854,939	742	2.129×10^{-8}
180,224	478,647	5,693,790	4	18	34,819,226,549	562	1.614×10^{-8}
188,416	478,647	5,693,790	12	53	34,788,343,245	3,164	9.095×10^{-8}
196,608	478,647	5,693,790	10	38	34,759,839,855	1,410	4.056×10^{-8}
204,800	478,647	5,693,790	20	94	34,733,475,830	3,292	9.478×10^{-8}
212,992	478,647	5,693,790	32	140	34,708,994,779	4,965	1.430×10^{-7}
221,184	478,647	5,693,790	4	13	34,686,162,324	324	9.341×10^{-9}
229,376	478,647	5,693,790	4	13	34,664,827,364	324	9.347×10^{-9}
237,568	478,647	5,693,790	10	28	34,644,854,320	839	2.422×10^{-8}
245,760	478,647	5,693,790	9	27	34,626,118,167	605	1.747×10^{-8}
253,952	478,647	5,693,790	4	13	34,608,500,245	324	9.362×10^{-9}
262,144	478,647	5,693,790	4	13	34,591,899,783	324	9.366×10^{-9}

Table 7: LP relaxation gap statistics for the ToaST vocabulary selection MILP with 400k pretokens. The frac- x and frac- z columns count fractional variables. The $\Delta = \hat{f} - f_{LP}^*$ column is the difference between the objective of the rounded LP solution $\hat{f}$ and the optimal objective of the LP f_{LP}^* . The $\delta = \Delta/\hat{f}$ column gives the relative relaxation gap.

$ V $	x -vars	z -vars	frac- x	frac- z	$\hat{f}$	Δ	δ
8,192	591,902	7,141,996	0	0	45,100,996,517	0	0
16,384	591,902	7,141,996	0	0	40,673,109,283	0	0
24,576	591,902	7,141,996	0	0	38,841,664,829	0	0
32,768	591,902	7,141,996	0	0	37,831,278,597	0	0
40,960	591,902	7,141,996	6	109	37,182,719,280	10,748	2.891×10^{-7}
49,152	591,902	7,141,996	4	114	36,728,900,011	1,544	4.204×10^{-8}
57,344	591,902	7,141,996	0	0	36,396,244,531	0	0
65,536	591,902	7,141,996	4	43	36,142,030,248	3,464	9.584×10^{-8}
73,728	591,902	7,141,996	10	212	35,942,140,866	4,257	1.184×10^{-7}
81,920	591,902	7,141,996	4	43	35,780,068,540	3,464	9.681×10^{-8}
90,112	591,902	7,141,996	0	0	35,646,133,112	0	0
98,304	591,902	7,141,996	0	0	35,533,586,648	0	0
106,496	591,902	7,141,996	0	0	35,437,817,446	0	0
114,688	591,902	7,141,996	0	0	35,355,144,287	0	0
122,880	591,902	7,141,996	0	0	35,282,991,969	0	0
131,072	591,902	7,141,996	0	0	35,219,508,697	0	0
139,264	591,902	7,141,996	8	48	35,163,192,732	3,664	1.042×10^{-7}
147,456	591,902	7,141,996	10	51	35,112,889,225	13,348	3.801×10^{-7}
155,648	591,902	7,141,996	6	27	35,067,664,949	12,919	3.684×10^{-7}
163,840	591,902	7,141,996	14	78	35,026,770,120	13,904	3.970×10^{-7}
172,032	591,902	7,141,996	14	73	34,989,568,420	2,753	7.868×10^{-8}
180,224	591,902	7,141,996	4	20	34,955,585,056	2,550	7.295×10^{-8}
188,416	591,902	7,141,996	4	11	34,924,398,119	2,708	7.754×10^{-8}
196,608	591,902	7,141,996	4	11	34,895,645,876	2,846	8.156×10^{-8}
204,800	591,902	7,141,996	10	40	34,869,060,022	15,735	4.513×10^{-7}
212,992	591,902	7,141,996	14	64	34,844,400,773	15,761	4.523×10^{-7}
221,184	591,902	7,141,996	52	238	34,821,423,187	6,149	1.766×10^{-7}
229,376	591,902	7,141,996	66	285	34,799,968,630	9,649	2.773×10^{-7}
237,568	591,902	7,141,996	47	214	34,779,892,228	6,863	1.973×10^{-7}
245,760	591,902	7,141,996	4	16	34,761,047,923	82	2.359×10^{-9}
253,952	591,902	7,141,996	4	16	34,743,334,749	82	2.360×10^{-9}
262,144	591,902	7,141,996	4	16	34,726,639,160	82	2.361×10^{-9}

Table 8: LP relaxation gap statistics for the ToaST vocabulary selection MILP with 500k pretokens. The frac- x and frac- z columns count fractional variables. The $\Delta = \hat{f} - f_{LP}^*$ column is the difference between the objective of the rounded LP solution $\hat{f}$ and the optimal objective of the LP f_{LP}^* . The $\delta = \Delta/\hat{f}$ column gives the relative relaxation gap.

$ V $	x -vars	z -vars	frac- x	frac- z	$\hat{f}$	Δ	δ
8,192	704,228	8,597,338	0	0	45,248,511,309	0	0
16,384	704,228	8,597,338	0	0	40,806,025,676	0	0
24,576	704,228	8,597,338	0	0	38,966,639,675	0	0
32,768	704,228	8,597,338	0	0	37,951,147,692	0	0
40,960	704,228	8,597,338	7	117	37,299,151,004	21,500	5.764×10^{-7}
49,152	704,228	8,597,338	4	77	36,842,392,553	1,690	4.587×10^{-8}
57,344	704,228	8,597,338	0	0	36,507,332,414	0	0
65,536	704,228	8,597,338	4	43	36,251,239,139	3,464	9.556×10^{-8}
73,728	704,228	8,597,338	4	43	36,049,695,718	3,464	9.609×10^{-8}
81,920	704,228	8,597,338	4	43	35,886,221,075	3,464	9.653×10^{-8}
90,112	704,228	8,597,338	0	0	35,751,075,189	0	0
98,304	704,228	8,597,338	0	0	35,637,475,906	0	0
106,496	704,228	8,597,338	0	0	35,540,731,094	0	0
114,688	704,228	8,597,338	0	0	35,457,263,752	0	0
122,880	704,228	8,597,338	0	0	35,384,390,896	0	0
131,072	704,228	8,597,338	5	27	35,320,260,380	203	5.747×10^{-9}
139,264	704,228	8,597,338	5	28	35,263,386,611	467	1.324×10^{-8}
147,456	704,228	8,597,338	12	97	35,212,544,966	3,384	9.610×10^{-8}
155,648	704,228	8,597,338	12	88	35,166,865,123	998	2.838×10^{-8}
163,840	704,228	8,597,338	5	28	35,125,581,620	1,054	3.001×10^{-8}
172,032	704,228	8,597,338	4	18	35,088,037,455	1,466	4.178×10^{-8}
180,224	704,228	8,597,338	6	46	35,053,722,115	1,108	3.161×10^{-8}
188,416	704,228	8,597,338	6	46	35,022,228,071	1,108	3.164×10^{-8}
196,608	704,228	8,597,338	8	51	34,993,204,631	2,794	7.984×10^{-8}
204,800	704,228	8,597,338	8	51	34,966,350,714	1,193	3.412×10^{-8}
212,992	704,228	8,597,338	8	50	34,941,463,536	2,989	8.554×10^{-8}
221,184	704,228	8,597,338	10	58	34,918,305,865	2,816	8.065×10^{-8}
229,376	704,228	8,597,338	4	19	34,896,685,087	93	2.665×10^{-9}
237,568	704,228	8,597,338	34	189	34,876,471,931	7,050	2.021×10^{-7}
245,760	704,228	8,597,338	35	193	34,857,511,426	6,830	1.959×10^{-7}
253,952	704,228	8,597,338	30	142	34,839,695,013	6,387	1.833×10^{-7}
262,144	704,228	8,597,338	30	127	34,822,912,931	3,803	1.092×10^{-7}

Table 9: LP relaxation gap statistics for the ToaST vocabulary selection MILP with 600k pretokens. The frac- x and frac- z columns count fractional variables. The $\Delta = \hat{f} - f_{LP}^*$ column is the difference between the objective of the rounded LP solution $\hat{f}$ and the optimal objective of the LP f_{LP}^* . The $\delta = \Delta/\hat{f}$ column gives the relative relaxation gap.

$ V $	x -vars	z -vars	frac- x	frac- z	$\hat{f}$	Δ	δ
8,192	815,895	10,060,616	0	0	45,362,191,523	0	0
16,384	815,895	10,060,616	0	0	40,908,382,806	0	0
24,576	815,895	10,060,616	0	0	39,062,851,981	0	0
32,768	815,895	10,060,616	0	0	38,043,381,167	0	0
40,960	815,895	10,060,616	4	123	37,388,651,403	7,489	2.003×10^{-7}
49,152	815,895	10,060,616	4	159	36,929,627,409	1,456	3.943×10^{-8}
57,344	815,895	10,060,616	0	0	36,592,649,091	0	0
65,536	815,895	10,060,616	4	49	36,335,033,935	3,122	8.592×10^{-8}
73,728	815,895	10,060,616	4	49	36,132,208,763	3,122	8.640×10^{-8}
81,920	815,895	10,060,616	4	49	35,967,611,182	3,122	8.680×10^{-8}
90,112	815,895	10,060,616	0	0	35,831,496,444	0	0
98,304	815,895	10,060,616	0	0	35,717,052,408	0	0
106,496	815,895	10,060,616	0	0	35,619,559,753	0	0
114,688	815,895	10,060,616	0	0	35,535,431,186	0	0
122,880	815,895	10,060,616	0	0	35,461,977,252	0	0
131,072	815,895	10,060,616	0	0	35,397,338,559	0	0
139,264	815,895	10,060,616	0	0	35,339,977,094	0	0
147,456	815,895	10,060,616	6	42	35,288,738,408	839	2.378×10^{-8}
155,648	815,895	10,060,616	4	21	35,242,680,519	781	2.216×10^{-8}
163,840	815,895	10,060,616	8	52	35,201,066,111	1,732	4.920×10^{-8}
172,032	815,895	10,060,616	9	54	35,163,223,450	1,527	4.343×10^{-8}
180,224	815,895	10,060,616	17	121	35,128,625,521	5,390	1.534×10^{-7}
188,416	815,895	10,060,616	11	70	35,096,851,343	4,287	1.221×10^{-7}
196,608	815,895	10,060,616	11	69	35,067,586,868	4,192	1.195×10^{-7}
204,800	815,895	10,060,616	12	87	35,040,509,580	4,886	1.394×10^{-7}
212,992	815,895	10,060,616	6	41	35,015,412,408	1,592	4.547×10^{-8}
221,184	815,895	10,060,616	0	0	34,992,073,404	0	0
229,376	815,895	10,060,616	6	31	34,970,294,105	829	2.371×10^{-8}
237,568	815,895	10,060,616	0	0	34,949,928,251	0	0
245,760	815,895	10,060,616	6	34	34,930,842,093	30	8.588×10^{-10}
253,952	815,895	10,060,616	6	34	34,912,909,475	97	2.778×10^{-9}
262,144	815,895	10,060,616	4	21	34,896,022,483	83	2.378×10^{-9}

Table 10: LP relaxation gap statistics for the ToaST vocabulary selection MILP with 700k pretokens. The frac- x and frac- z columns count fractional variables. The $\Delta = \hat{f} - f_{\text{LP}}^*$ column is the difference between the objective of the rounded LP solution $\hat{f}$ and the optimal objective of the LP f_{LP}^* . The $\delta = \Delta/\hat{f}$ column gives the relative relaxation gap.