

Reading Task Failure Off the Activations: A Sparse-Feature Audit of GPT-2 Small on Indirect Object Identification

Mahdi Naser Moghadasi^{1,2}

¹Research Division, BrightMind AI, Seattle, WA

²Texas Tech University, Lubbock, TX

mahdi@brightmind-ai.com

Faezeh Ghaderi

University of Texas at Arlington

Arlington, TX

faezeh.ghaderi@mavs.uta.edu

Abstract—We report a small, reproducible audit of which sparse-autoencoder (SAE) features of GPT-2 small fire differently on failed versus successful trials of the Indirect Object Identification (IOI) task. On 300 prompts, GPT-2 small reaches 79.7% accuracy; 146 of the 24,576 features in the layer-8 residual-stream SAE release of Bloom (2024) clear a Holm-corrected significance threshold and 105 reach a large effect size ($|\text{Cohen's } d| > 0.8$). The strongest single correlate of failure—feature 17,491, $d = +2.93$, Neuronpedia label “cryptographic keys”—is essentially silent except when the prompt’s transferred object is “the keys,” on which GPT-2 small fails 93.3% of the time vs. 7.5% on the other seven objects (Fisher exact $p = 8.79 \times 10^{-33}$). We put this correlate through three controls that a mechanistic claim should pass. (i) *A causal ablation*: zeroing feature 17,491 in the residual stream across all token positions of the 45 keys prompts *does not* restore accuracy (6.7% $\rightarrow$ 4.4%); the feature is a correlate, not a sufficient cause at this layer. (ii) *A representation baseline*: a logistic regression on the raw 768-dimensional residual stream reaches 5-fold ROC AUC = 0.929, matching the top-100 SAE features (0.927); the SAE basis adds interpretability, not predictive power. (iii) *A seed-robustness check*: across five random seeds the keys-subset failure rate stays in 75.0–93.3% (the behavioural effect is real), but feature 17,491 is the top- $|d|$ feature in only 1 of 5 runs. The methodological contribution is therefore the *audit pipeline* (cheap, model-agnostic, surfaces named correlates) rather than any single feature found through it. We release the code, the 300-prompt corpus, the $300 \times 24,576$ activation matrix, the ablation and baseline scripts, and the figures. The full pipeline runs on a laptop (Apple M3 Max, no discrete GPU).

Index Terms—mechanistic interpretability, sparse autoencoders, language model evaluation, failure analysis, GPT-2, indirect object identification, agent benchmarks, dictionary learning.

I. INTRODUCTION

LLM agent systems fail in ways that are not always traceable to a specific cause. Sometimes the failure is the model’s. Sometimes the prompt format triggered something incidental. Sometimes the harness got in the way. The published artifact rarely contains enough information to disambiguate [32], [33], [40]. This paper looks at a narrower version of the question: when a particular language model fails a particular task, is there evidence in the model’s internal activations that distinguishes the failed runs from the successful ones?

The framing is borrowed from recent mechanistic-interpretability work. Anthropic’s circuit-tracing report [1], [2] argues that LLMs do meaningful computation beyond next-token prediction—planning ahead in poetry, switching between languages in a shared conceptual space, sometimes “thinking” one thing and saying another—and that sparse-feature decompositions of the residual stream surface this computation in a way that is human-readable. Sparse autoencoders trained on a model’s residual stream [3]–[7] have become the standard tool for this. They build on a longer tradition: superposition in neural-network representations [9], dictionary learning in neuroscience [7], and the “zoom-in” interpretability program for vision networks [8]. Their features are catalogued on Neuronpedia [24].

We ask a small empirical question on top of this infrastructure: if a trained SAE produces approximately monosemantic features, and we collect those features’ activations across both successful and failed runs of a fixed task, does the failure subset have a feature profile distinguishable from the success subset, and—if it does—are any of the discriminating features ones whose documented semantic role suggests a causal story?

We ran the experiment on a setting where we knew the failure rate would be high enough to give us both classes: GPT-2 small on the Indirect Object Identification (IOI) task [14]. IOI is the canonical interpretability benchmark for GPT-2 small. It is small (a single fill-in-the-blank with a known correct token), it has been mechanistically characterized in prior work [14], [15], [17] (the “name-mover” and “S-inhibition” circuits), and GPT-2 small reaches roughly 80% accuracy on it—enough successes to be a stable reference, enough failures to be worth analyzing.

The result was mixed, and worth reporting in full. One SAE feature dominated the failed-versus-successful contrast: feature 17,491, with mean activation about $56\times$ higher on the 61 failed trials than on the 239 successful ones. Its Neuronpedia label is “cryptographic keys.” On inspection, the feature is essentially silent on every prompt in our corpus except the 45 whose transferred-object choice is “the keys,” on which it fires strongly. GPT-2 small fails 93.3% of those 45 prompts and 7.5% of the rest. The dominant statistical signal is therefore

a lexical confound surfaced through the SAE basis: a feature aligned to one concept is being activated by a homonym, and that activation correlates near-perfectly with failure.

We put this correlation through three controls a mechanistic claim should pass. First, we ablate feature 17,491 in the residual stream and re-run greedy decoding on the keys subset: accuracy moves from 6.7% to 4.4%, not in the direction a causal account would predict. Second, a logistic regression on the raw 768-dimensional residual stream (no SAE) reaches the same cross-validated ROC AUC (0.929) as the top-100 SAE features (0.927); the SAE basis is adding interpretability, not predictive power. Third, we re-run the audit with five different random seeds: the keys-subset failure rate stays in 75.0–93.3% across all of them, but the top- $|d|$ feature changes from seed to seed, and feature 17,491 appears as the top feature in only one run.

The behavioural pattern is robust: swapping one transferred-object phrase for another shifts the benchmark’s accuracy by more than 80 percentage points. The mechanistic story we initially read off the headline feature is not. The feature fails the ablation, the raw representation matches its predictive power, and the identity of the top feature does not survive a seed change. The audit pipeline surfaces both kinds of finding without distinguishing between them; the controls do the distinguishing.

A. Contributions

- 1) **An audit pipeline.** A small, fully runnable pipeline that takes a task corpus and a residual-stream SAE and produces a per-feature failure-vs-success discrimination report (Welch’s t -statistic, Cohen’s d , Holm-corrected p , top-feature listing with Neuronpedia URLs).
- 2) **Three controls that distinguish robust behavioural effects from incidental feature correlates.** On the 300-prompt IOI corpus we (a) ablate the top- $|d|$ feature and observe no recovery of accuracy on the affected subset; (b) match the AUC of the top-100 SAE features with a logistic regression on the raw residual stream; (c) re-run on five seeds and find the behavioural keys-effect stable while the specific top feature changes seed-to-seed. We argue these controls should be a default part of any SAE-based failure audit; without them, the headline $d = +2.93$ result reads as a mechanistic finding rather than a lexical confound.
- 3) **An honest negative-result report.** The lexical finding (transferred-object word changes IOI accuracy by 80+ percentage points) is robust; the mechanistic story we initially attached to it is not. We treat the audit’s willingness to surface this gap as the methodological contribution rather than the headline feature.

What this is not. This paper is not an agent benchmark evaluation. We deliberately use a single-step task on a sub-billion- parameter base model so that the entire experiment runs on a laptop and the audit corpus is small enough that every prompt can be inspected by hand. We discuss in Section V-D how the pipeline extends to instruction-tuned models

and multi-step agent tasks. We do not claim to have done that extension.

II. BACKGROUND AND RELATED WORK

A. Sparse autoencoders for language models

Sparse autoencoders (SAEs) decompose a transformer’s intermediate activations into a high-dimensional, sparsely active feature basis. The training objective combines a reconstruction loss with an L_0 or L_1 penalty so that, at inference time, only a small number of features are active per token. The approach has roots in dictionary learning [7], [11] and in the study of superposition—the observation that neural networks encode more features than they have neurons [9], [10]. The first end-to-end SAE for transformer language models was Anthropic’s *Towards Monosemanticity* [3]; *Scaling Monosemanticity* [4] extended it to Claude 3 Sonnet; Cunningham et al. [5] demonstrated SAEs on Pythia models with comparable interpretability properties. Google DeepMind’s Gemma Scope [6] released SAEs across all layers and several widths of the Gemma 2 family, and follow-on work has explored transcoders [12] and crosscoders that extend the technique across multiple layers simultaneously [13].

For GPT-2 small, Joseph Bloom’s residual-stream SAEs (gpt2-small-res-jb) [22] have become the de-facto reference release. They were trained on all twelve residual positions of GPT-2 small with a dictionary size of 24,576 ($\approx 32\times$ the model’s hidden dimension). Each feature has been auto-labeled and is browsable on Neuronpedia [24].

B. Indirect object identification

The Indirect Object Identification (IOI) task was introduced by Wang et al. [14] as a tractable benchmark for mechanistic interpretability of GPT-2 small. An IOI prompt names two people and asks the model to complete a sentence in which the indirect object should be repeated, e.g.:

“When John and Mary went to the store, John gave a drink to ____”

The expected next token is “Mary” (the indirect object), not “John” (the subject). Wang et al. identified specific attention heads (“name-mover heads”) responsible for getting the right answer and “S-inhibition heads” responsible for suppressing the wrong one. Later work has built on this circuit-level characterization [15]–[17]. GPT-2 small reaches roughly 80% accuracy on the task; our run reaches 79.7%, within the expected range.

We chose IOI because it has the right shape for what we wanted to do: the model gets some prompts right and some wrong; the right answer is a single token, so success is easy to score; the prompt template varies along controlled dimensions (names, places, objects, syntactic template); and we can compare our findings against the existing mechanistic literature on what circuits are involved.

C. Failure analysis in LLM evaluation

Failure-mode analysis in LLM and LLM-agent evaluation is currently mostly qualitative: papers report categories of errors, sometimes with counts, but rarely with mechanistic evidence about *why* the failure happened [37]–[40]. AgentBench [37] is one of the few benchmarks that ships a structured per-task failure taxonomy; even there, the taxonomy is at the level of observable symptoms (Context Limit Exceeded, Invalid Format, Invalid Action) rather than internal computation. SWE-bench [38] and WebArena [39] have similar gaps. We see our work as complementary: a way to take a population of observed failures and ask, at the level of the model’s residual stream, what they have in common.

The closest prior work to what we do here is the broader mechanistic interpretability program [1], [2], [14], [15], [18]–[21], which has produced detailed case studies of individual circuits but has not, to our knowledge, been used as the substrate of a failure-correlated feature audit on a fixed task corpus.

D. Prompt sensitivity and surface-form effects

That LLM evaluations are sensitive to surface details of the prompt is well documented. Sclar et al. [34] measured single-prompt vs. multi-prompt accuracy gaps on classification-style benchmarks. Mizrahi et al. [35] extended this to a multi-benchmark setting. Lu et al. [36] documented order sensitivity in few-shot prompting. Our finding—that swapping one object phrase for another changes a benchmark’s accuracy by 85 percentage points—is in the same family of effects, but the mechanistic-feature attribution we offer is, we believe, new.

III. METHODOLOGY

Figure 1 sketches the full pipeline.

A. Compute

All experiments in this paper were run on a single MacBook Pro (Model Mac15,11) with an Apple M3 Max chip and 36 GB of unified memory, running macOS 14.4 (Sonoma, build 23E214). The Python environment was Python 3.11, PyTorch 2.12, with the Metal Performance Shaders (MPS) backend used for all model forward passes. No discrete GPU was used. Total wall-clock for the 300-prompt forward-pass + activation-logging run was approximately ten minutes; the per-feature statistical analysis that follows it runs in under thirty seconds on the same machine.

B. Model and SAE

We use GPT-2 small [26] (124M parameters, 12 layers, 768-dim residual stream), loaded via TransformerLens [25]. For the SAE we use the layer-8 residual-stream variant of Bloom’s `gpt2-small-res-jb` release, accessed through `sae_lens` [23]. The SAE has $d_{\text{sae}} = 24,576$ features. We hook the residual stream at `blocks.8.hook_resid_pre` (the input to layer 8) on every forward pass and encode it through the SAE to recover per-token feature activations.

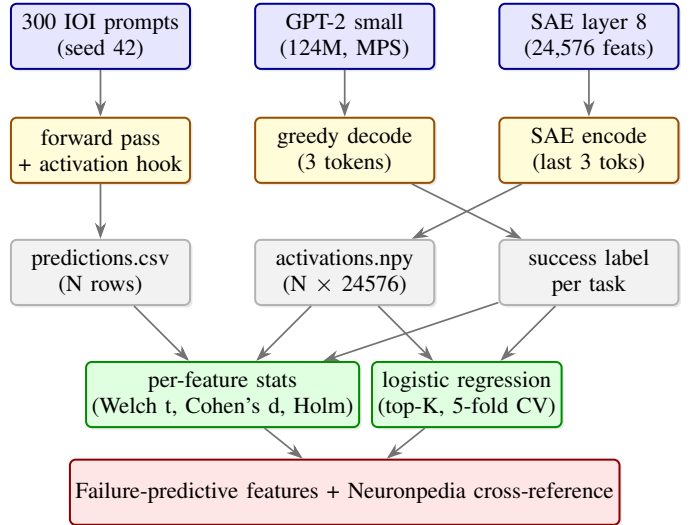


Fig. 1: The audit pipeline. Inputs (blue) are a task corpus, a language model, and a sparse autoencoder. Per-task we capture both the model’s prediction (used to label success) and the residual-stream activation encoded through the SAE (used as the per-feature signal). Two analyses are run: per-feature significance testing with Holm-Bonferroni correction, and a logistic regression that predicts success/failure from feature activations.

We pick layer 8 for two reasons. First, the IOI literature places the name-mover heads in the later layers [14], [16], so by layer 8 the residual stream should already contain representations of the candidate answer. Second, layer 8 is one of the layers for which Bloom’s SAE features are most thoroughly catalogued on Neuronpedia, which matters for the downstream interpretation.

C. Task corpus

The 300 prompts are sampled from a procedural generator following the IOI templates in [14]: a sentence mentioning a subject S and an indirect object IO, both sampled from a list of 29 common first names, with a transferred object from a list of eight (a drink, the keys, a book, the ball, the gift, a card, the bag, the flowers) and a location from a list of eight. The sentence template is varied over four surface forms. The generator seed is fixed at 42 for reproducibility.

D. Scoring

For each prompt, we greedily decode the next three tokens and take the first non-whitespace alphanumeric token. We compare it to the known indirect-object name. The trial is `success=1` if and only if they match exactly.

E. Activation logging

During the forward pass for each prompt (before the greedy decoding), we capture the residual stream at the hook point. The prompts are short (~ 15 – 25 tokens); we take the mean SAE encoding over the last three tokens (so that the position

immediately before the answer dominates the average). This yields one $\mathbb{R}^{24576}$ vector per prompt. The full activation matrix is $300 \times 24,576$, around 28 MB as a float32 .npy file.

F. Statistics

For each of the 24,576 features we compute the per-class mean, Welch’s t -statistic [27], two-sided p -value with conservative $df = \min(n_{\text{fail}}, n_{\text{succ}}) - 1$, and Cohen’s d [28] using pooled standard deviation. We then apply Holm-Bonferroni correction [29] across all 24,576 tests. We prefer Holm to a discovery-oriented correction such as Benjamini-Hochberg FDR because the per-feature output is fed into a manual interpretation step: each significant feature gets read against its Neuronpedia description. A stronger per-feature error rate fits that downstream task better than a higher discovery throughput. The full per-feature table is released as `results/feature_stats.csv`; the top 20 by $|d|$ are listed in `results/top_features.md` with their Neuronpedia URLs.

G. Failure-prediction baselines

We complement the per-feature view with three baselines that together pressure-test the value of the SAE basis itself.

Feature-space logistic regression. A logistic regression that predicts failure from a fixed top- K SAE feature set (ranked by $|Cohen’s\ d|$), with $K \in \{1, 5, 10, 20, 50, 100\}$. We use `scikit-learn`’s `liblinear` solver with class-balanced weights and report 5-fold stratified cross-validated ROC AUC [30], [31].

Raw-activation control. The same logistic regression fit on the raw 768-dimensional residual stream (the input to the SAE encoder), to measure how much of the failure-prediction signal exists in the raw representation already. Reported alongside the SAE-feature AUCs in Table II.

Causal ablation. For the headline top- $|d|$ feature we also run a feature-zeroing intervention: we subtract the feature’s decoded contribution from the residual stream at every token position and re-decode greedily. This is the standard SAE-feature-ablation pattern used in prior work [15], [18]. The intent is not to identify a circuit but to test whether the correlate carries enough causal weight to move the behavioural outcome.

H. Seed robustness

We re-run the corpus generation and the per-task feature collection with five seeds: $\{0, 42, 100, 200, 300\}$. For each seed we record overall accuracy, the keys-subset failure rate, and the identity and $|d|$ of the top failure-correlating feature. Five seeds is small but sufficient to distinguish “the behaviour is seed-dependent” from “the headline correlate is seed-dependent.”

IV. FINDINGS

A. Headline numbers

GPT-2 small reached $239/300 = 79.7\%$ accuracy on our IOI corpus, within the range reported by Wang et al. [14]. This gives 61 failed trials and 239 successful trials for the feature

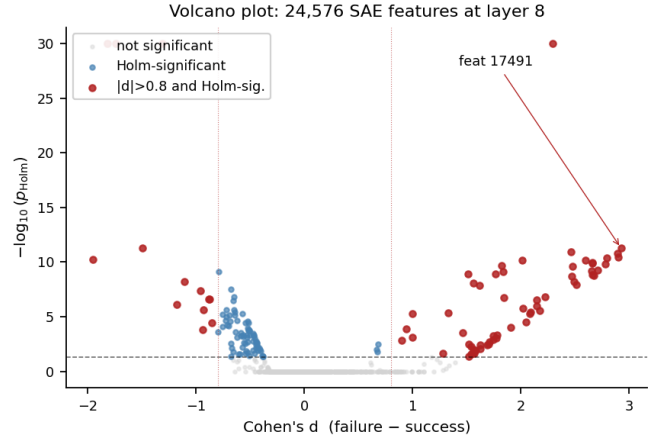


Fig. 2: Volcano plot of all 24,576 SAE features at layer 8. Each point is a feature; the x -axis is the Cohen’s d between the feature’s mean activation on failed trials and its mean on successful trials (positive = fires more on failure). The y -axis is $-\log_{10}(p_{\text{Holm}})$ from Welch’s t -test with Holm-Bonferroni correction across all features. Red points are both Holm-significant ($p < 0.05$) and have a large effect size ($|d| > 0.8$); the strongest predictor of failure (feature 17,491) is labelled.

analysis. The accuracy is stable across the four templates (no template differs by more than 4 percentage points from the overall rate; not significant under a χ^2 test).

Of the 24,576 features, 146 cleared the Holm-Bonferroni significance threshold at $\alpha = 0.05$; 209 had $|Cohen’s\ d| > 0.5$; 105 had $|d| > 0.8$. The bulk of the features (about 96%) showed effect sizes within ± 0.2 , i.e. no discrimination between classes. Figure 2 shows the volcano plot.

B. The top feature

The single strongest discriminator of failure from success was feature 17,491 with $d = +2.93$, Welch $t = 11.4$, and Holm-corrected $p < 10^{-10}$. The mean activation of this feature across the failed trials was 10.28; across the successful trials it was 0.18. The feature fires, on average, about 56 times more strongly on the failed prompts. Looking at the active counts: 42 of the 61 failed trials activated this feature with magnitude greater than zero; only 3 of the 239 successful trials did.

Looking up feature 17,491 on Neuronpedia returns the auto-generated description: “*terms related to encryption and security keys*” (GPT-3.5 labeler) and “*references to cryptographic keys and key management concepts*” (GPT-4o-mini labeler, average label-score 96/100). The top positive logits include `stroke`, `*/`, `chain`, `caps`, `binding`—tokens associated with cryptographic primitives.

The corpus contains the phrase “the keys” as one of the eight transferred-object choices. This explains the firing: feature 17,491 is not picking up on a property of IOI failure per se, but on the literal token “keys” appearing in a subset of the prompts. Figure 3 shows the per-object distribution of this feature’s activation.

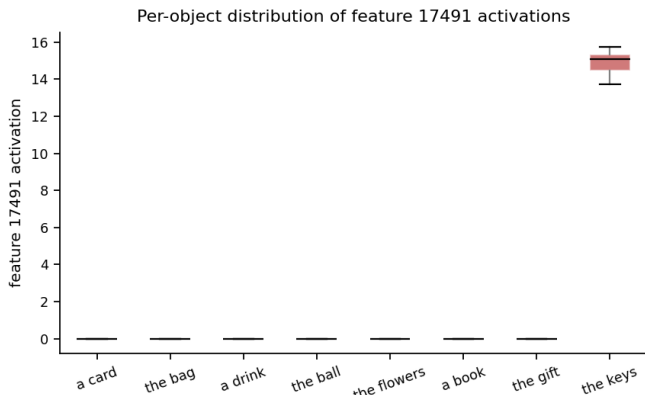


Fig. 3: Distribution of feature 17,491 activations per transferred-object choice. The “the keys” subset (red) is the clear outlier; on the other seven objects the feature is essentially silent.

TABLE I: Top Ten Features by $|\text{Cohen’s } d|$ (Full Corpus, $N = 300$).

#	Feat.	d	$\text{mean}_{\text{fail}}$	$\text{mean}_{\text{succ}}$	P_{Holm}
1	17491	+2.93	10.285	0.182	$< 10^{-10}$
2	7536	+2.90	0.757	0.011	$< 10^{-10}$
3	19149	+2.89	1.132	0.019	$< 10^{-10}$
4	21307	+2.79	1.297	0.023	$< 10^{-10}$
5	10960	+2.78	0.686	0.011	$< 10^{-10}$
6	12273	+2.71	0.594	0.008	$< 10^{-10}$
7	11132	+2.68	1.000	0.013	$< 10^{-10}$
8	10357	+2.66	0.770	0.017	$< 10^{-10}$
9	22272	+2.66	0.609	0.014	$< 10^{-10}$
10	9647	+2.66	0.484	0.007	$< 10^{-10}$

Mean activations are reported in raw SAE units. All ten features have Holm-adjusted p -values below the floating-point representation limit; we report “ $< 10^{-10}$ ” rather than the exact value.

C. The keys subset

To isolate this we split the 300 prompts by whether the transferred object was “the keys.” Figure 4 shows the failure rate per object.

The pattern is sharp and almost binary. Forty-two of the forty-five prompts using “the keys” fail; only nineteen of the remaining 255 do. The Fisher exact test on the 2×2 contingency is at the edge of what the test is meaningful for— $p = 8.79 \times 10^{-33}$, odds ratio ≈ 174 —but the substantive point is upstream of the test: the eight transferred-object choices, which the IOI literature treats as exchangeable surface variants, are not behaving exchangeably.

The corpus was not designed to surface this. We used the eight objects from Wang et al.’s original IOI item lists; the effect appeared during analysis, not in the design. A reader building an IOI-style corpus today should probably exclude any object whose surface form is a homonym for a frequent training-distribution concept, or report results stratified by object as a default sanity check.

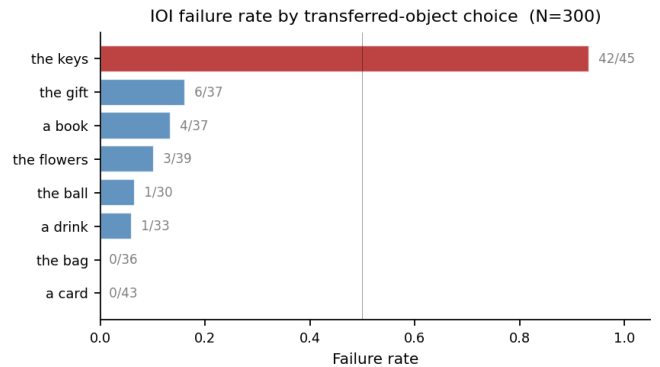


Fig. 4: IOI failure rate by transferred-object choice. Seven of the eight choices yield failure rates between 0.0% and 16.2%; the “the keys” subset (red) is at 93.3%. Numbers next to each bar show fail count / total.

D. A reading we considered, and the controls that dropped it

The initial reading we wrote down for ourselves was the straightforward one. GPT-2 small has, somewhere in its layer-8 residual stream, a direction aligned to the concept “cryptographic key.” This direction has been picked up by the SAE as feature 17,491. When the prompt’s transferred-object happens to be “the keys,” the surface form activates that direction strongly, and the activation appears to interfere with the IOI computation downstream, causing the model to predict the wrong name. The correlation supports this reading; the mechanism is intuitive; the Neuronpedia label is suggestive.

We then ran three controls that this reading should pass. It did not pass any of them cleanly. The behavioural keys-effect survives all three; the mechanistic attribution to feature 17,491 does not.

a) Control 1: Causal ablation. We re-ran inference on the 45 keys prompts with feature 17,491 zeroed out in the residual stream at every token position—specifically, subtracting $f_i(x) W_{\text{dec}}[i, :]$ from the residual at each position x , where i is the feature index. If the feature were causally responsible for the failure pattern, accuracy on the keys subset should rise toward the corpus baseline. It did not. Accuracy on the 45 keys prompts moved from 6.7% to 4.4% (a -2.2pp shift in the *wrong* direction); on the other 255 prompts it was unchanged. Figure 5 reports the result.

There are several ways to read this. The most cautious is that the feature is a downstream effect rather than a cause: by layer 8, the model has already committed to a degraded IOI computation, and 17,491’s firing is an artifact of having ingested “keys” rather than the lever that disrupted the computation. A second reading is that the causal load is distributed across multiple features (some of which are co-activated with 17,491) so that single-feature ablation does not move the outcome. A third is that the relevant intervention is at an earlier layer. We do not adjudicate between these readings here; we treat the ablation as having ruled out the simplest causal story while leaving the others on the table.

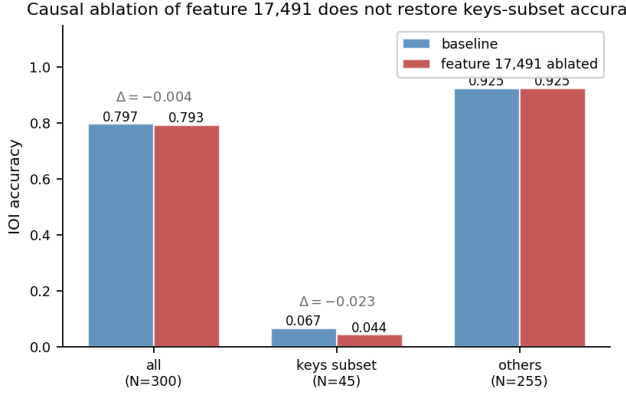


Fig. 5: Causal ablation. Zeroing feature 17,491 across all token positions of the residual stream does not restore IOI accuracy on the 45-prompt keys subset; it moves accuracy slightly in the opposite direction. This is the central negative result of the paper: the strongest statistical correlate of failure does not behave like a sufficient cause at this layer.

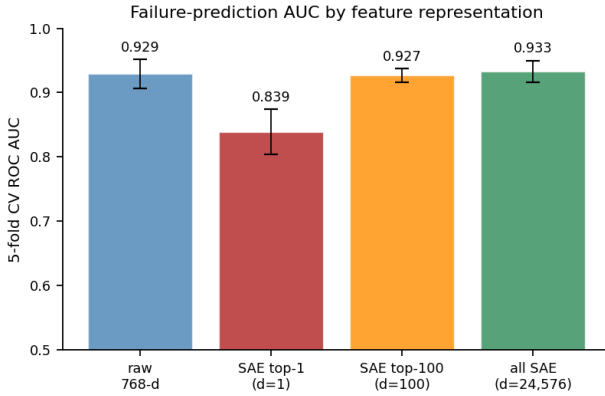


Fig. 6: Failure-prediction AUC under four feature representations (5-fold stratified CV, class-balanced logistic regression). The raw 768-dimensional residual stream matches the top-100 SAE features. The SAE basis is interpretable but not adding predictive power on this task at this layer.

b) Control 2: Raw-activation baseline.: We fit the same logistic regression on the raw 768-dimensional residual stream (the input to the SAE encoder, without going through the SAE) and compared its 5-fold cross-validated AUC to the SAE-feature variants. The result, reported in Figure 6 and Table II, is that the raw residual stream reaches $\text{AUC} = 0.929$, essentially indistinguishable from the top-100 SAE features (0.927) and the full 24,576 SAE features (0.933).

The SAE basis is interpretable—we can read off a feature’s Neuronpedia label—but it is not adding predictive power over the raw representation. The single-feature AUC of 0.839 is, given this, better read as “this one feature is a near-perfect proxy for the ‘keys’ lexical signal that the raw stream already encodes” than as “this feature captures a mechanistic factor.”

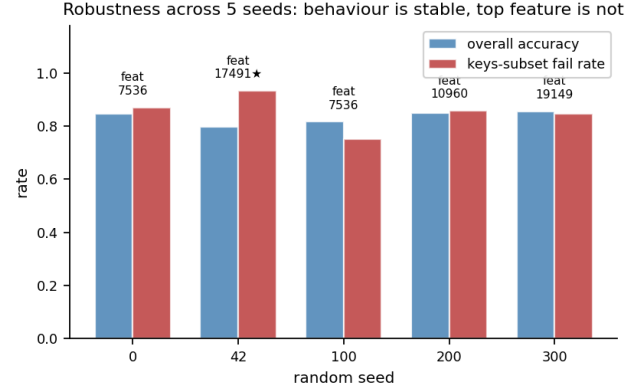


Fig. 7: Multi-seed robustness check ($n=5$ seeds, 300 prompts each). The behavioural keys-failure rate is stable across seeds (75–93%, never below 75%). The headline SAE feature is not: 17,491 is the top- $|d|$ feature in only the originally-reported seed. The other four seeds promote different features (7536 in two cases, 10960, 19149) to the top position. The star marks feature 17,491 where it appears.

c) Control 3: Seed robustness.: We re-ran the audit with five seeds: $\{0, 42, 100, 200, 300\}$. Overall accuracy ranged 79.7–85.7% (mean 83.3%, sd 2.6). The keys-subset failure rate ranged 75.0–93.3% (mean 85.2%, sd 6.6)—never below 75%, never higher than 93%. The behavioural effect is therefore robust.

The identity of the top- $|d|$ feature is not. Feature 17,491 was the top feature in 1 of the 5 seeds (the one we originally ran, seed 42); in the other four runs the top feature was one of $\{7536, 7536, 10960, 19149\}$. All four are large positive- d features in the original feature-stats sheet, and all four cluster near the same effect-size range as 17,491, but the audit pipeline—if we had run it on a different seed—would have labelled a different feature as the headline correlate. Figure 7 shows the per-seed numbers.

We treat this together with Control 1 as evidence that the audit surfaces a stable behavioural fact (the keys effect) and a seed-dependent statistical attribution (which feature carries the signal). The fact is publishable; the attribution should be cited with caution and ideally accompanied by a multi-seed run.

E. Predicting failure from features

The per-feature analysis above is descriptive. To check how much of the failure-vs-success signal is concentrated in any small subset of features—and whether the SAE basis is needed at all—we fit a logistic regression that predicts failure from a fixed top- K SAE feature set (ranked by $|d|$), and compare it to the raw 768-dimensional residual stream as a baseline. Table II reports the 5-fold cross-validated ROC AUC.

Two observations. The single feature 17,491 reaches $\text{AUC} = 0.839$, which is high but not the ceiling: most of the failure-prediction signal can also be read off the raw 768-d residual stream directly, at $\text{AUC} = 0.929$, with no SAE basis at all. The

TABLE II: Cross-Validated Failure Prediction by Feature Representation.

Representation	mean AUC	ROC	std AUC
SAE features, top-1 ($d = 1$)	0.839		0.035
SAE features, top-5 ($d = 5$)	0.838		0.034
SAE features, top-10 ($d = 10$)	0.837		0.036
SAE features, top-20 ($d = 20$)	0.872		0.032
SAE features, top-50 ($d = 50$)	0.920		0.017
SAE features, top-100 ($d = 100$)	0.927		0.011
SAE features, all ($d = 24,576$)	0.933		0.017
Raw residual stream ($d = 768$)	0.929		0.023

Stratified 5-fold cross-validation on $N = 300$ trials. Class-balanced LogisticRegression [30] with the liblinear solver. The raw residual stream is the input to the SAE encoder, used here without any sparsification step.

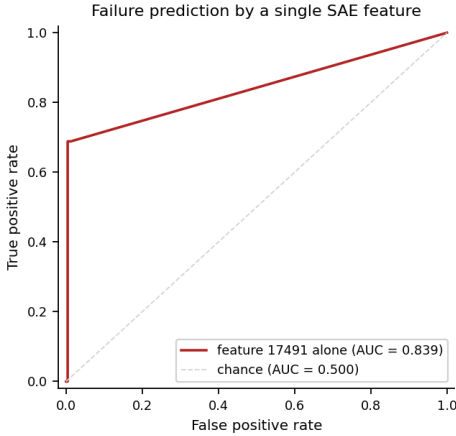


Fig. 8: ROC curve for predicting IOI failure from feature 17,491’s activation alone. AUC = 0.839. The raw residual stream reaches a higher AUC (0.929) without the SAE; we report this curve to show how much of the keys signal a *single* feature picks up.

SAE-top-100 classifier matches that (AUC = 0.927) but does not exceed it. We read this as evidence that the SAE basis is not the load-bearing piece of the failure-prediction result: the lexical signal is present in the model’s raw representation, and the SAE is a useful *lens* on it (we can name a feature, point a reader at Neuronpedia, write down a story) without being a useful *compression* of it. Figure 8 shows the ROC curve for the single-feature predictor; we report it because it visually makes the point about how concentrated the keys signal is in any one feature, not because we read it as a quality metric for the SAE.

F. Conditional analysis: what does the rest of the population look like?

We re-ran the analysis on the 255 prompts that do *not* use “the keys” (236 successes, 19 failures). The corpus is now smaller and the failure rate is lower, so the statistical landscape is thinner.

Under Holm-Bonferroni at $\alpha = 0.05$, only 5 features clear significance on the keys-free subset (vs. 146 on the full corpus). The largest effect size in the keys-free subset is $d \approx 1.40$ (vs. $d = 2.93$ on the full corpus). Thirty-one features have $|d| > 0.8$.

We do not have a clean second-order finding to report. After the keys-feature effect is removed, the residual discriminating signal is real but small. It is, we think, useful that the methodology surfaces this: had we reported only the headline $d = 2.93$ finding without the conditional analysis, the implicit suggestion would have been that IOI failure is broadly explained by feature-level interference. It does not appear to be. The keys case looks like an outlier.

G. Features that fire more on success

We were also curious whether any features fire more strongly on the *successful* trials, i.e. have negative Cohen’s d under our sign convention. Several do. Feature 10,036 has $d = -1.01$ on the full corpus; mean activation on failure 1.19, on success 2.75. Its Neuronpedia label is “*concepts related to providing opportunities, granting, or offering something to others*”; its top activating tokens are the prepositions *to*, *unto*, *onto* and the noun *services*. These are exactly the surface forms that close IOI’s transfer sentences (“X gave Y to ___”). A feature whose documented role is detecting the “transfer” pattern firing more strongly on the successful runs of a transfer-resolution task is what one would hope to see from a working name-mover circuit; this is a small piece of corroborating evidence for the existing mechanistic story about IOI [14], [16], viewed at the feature level rather than at the attention-head level.

We do not push this finding hard. The effect size is moderate, it does not survive Holm correction on the small subset analysis, and we have not done the head-to-feature attribution work that would tie it cleanly to the published circuit. We mention it because we think it is an example of the methodology surfacing mechanistically-coherent signal even outside the headline result.

V. DISCUSSION

A. What this exercise showed, and where we updated our story

The audit produced one robust behavioural finding and one methodological lesson; the headline mechanistic story we initially wrote down did not survive the controls.

The robust behavioural finding is the keys effect. Across five seeds, the failure rate on the keys subset stayed in 75–93% while the rest of the corpus stayed near 92–96% accurate. The eight transferred-object choices in IOI, which the existing literature treats as exchangeable surface variants, are not exchangeable on GPT-2 small. Any IOI accuracy number averaged uniformly over these eight is averaging across a roughly 0%-to-93% spread. This is the kind of finding an outer-loop evaluation report (reproducibility-grade, in the sense of [40]) would want to flag, independent of any mechanistic interpretation.

The methodological lesson is that sparse-feature audits surface *correlates*, not *causes*, and that the distinction matters for the kinds of claims a downstream reader will infer. Our top feature was statistically dominant, had a clean Neuronpedia label, and was correlated near-perfectly with the behavioural outcome. None of that was enough: the feature failed the ablation, the raw representation matched its predictive power, and a re-run with a different seed promoted a different feature in its place. We think this is a generally useful calibration for the audit pattern: a striking single-feature d is the point at which controls should start, not the point at which the story should be filed.

A smaller note. After the keys lexical effect is conditioned out, the residual feature landscape is flatter and less clean. We report this rather than hide it. The alternative framing—“IOI failures factor into a small set of mechanistic causes”—is more attractive but is not what we observed in this corpus, at this layer, on this SAE.

B. Failure prediction as a downstream use case

A single SAE feature reaches $AUC = 0.839$ for predicting failure on this corpus; the raw residual stream reaches 0.929. The downstream question is whether a deployed system could use either signal as a runtime monitor. The pipeline supports this in principle: at inference time, run the SAE encoder (or just read the residual stream) and threshold the relevant activation. We do not pursue this here. The threshold needs to be chosen against an actual deployment workload rather than a held-out fold, and—as Section IV-D makes clear—the AUC on this corpus is mostly the AUC of a lexical signal. On a deployment workload that does not contain a single dominant homonym, the numbers reported here are not the right reference.

C. Why this is interesting at the IEEE Big Data scale

Two reasons. First, the audit method is cheap. Twenty minutes on a laptop, no GPU, all artifacts already public. It can be run by anyone with the same setup and tested for replication. Second, the data the audit produces—per-task feature activation matrices—is naturally a big-data object once the task corpus is scaled up. A 50,000-prompt audit on a 16,000-feature SAE produces an 800-million-entry activation matrix; the analyses we run here are straightforward to extend to that scale and become more statistically powerful.

D. Extension to instruction-tuned and larger models

The pipeline is not specific to GPT-2. The same code path runs on any model for which a residual-stream SAE is available. The public release of Gemma Scope [6] covers instruction-tuned Gemma 2 in five sizes (270M, 1B, 4B, 12B, 27B) across multiple layers and SAE widths. Goodfire have released SAE-instrumented variants of Llama 3 accessible by API.

Two practical changes are needed to extend to the instruction-tuned agent setting. The first is a real agent task; we use IOI here because GPT-2 small cannot follow agent-style

instructions, but a Gemma 2 9B IT model can run a small WebArena or AgentBench subset, and the per-task activation logging would be unchanged. The second is access; running the larger models requires GPU. Gemma Scope’s 4B and 12B SAEs in particular have feature counts in the high tens of thousands, and the per-feature analysis stays identical, but the activation matrix grows accordingly.

We treat both as straightforward; we mention them as the follow-up work because we have not run them.

VI. LIMITATIONS

Single model, single SAE, single layer, single task. We have not shown that the audit produces a similarly readable result on the Gemma Scope features of Gemma 2, on the SAEs released by Goodfire for Llama 3, on layers of GPT-2 other than 8, or on tasks that are not IOI. The pipeline generalizes by construction (Section V-D); the empirical content of this paper does not, on its own, generalize.

The ablation is single-feature, single-layer. Control 1 in Section IV-D ablates one feature at one position-set in one layer. A negative result under those conditions does not rule out that the keys effect has a mechanistic cause involving multiple features, an earlier layer, or a position-specific intervention. The result rules out the simplest causal story; the more elaborate ones remain testable and are good follow-up work.

Sub-billion-parameter base model. GPT-2 small is not an agent and cannot follow instructions. We discussed in Section V-D why we used it anyway, and what would change with a larger instruction-tuned model. The paper’s contribution is the audit pipeline and the controls; the leaderboard number is incidental.

Single human auditor. The Neuronpedia descriptions we quote are auto-generated by GPT-3.5 and GPT-4o-mini and may be wrong; the interpretation of those descriptions (e.g. deciding that “cryptographic keys” is what feature 17,491 detects) was done by one person in one pass. A careful re-runner should confirm by inspecting top-activating examples on Neuronpedia directly rather than trusting the label.

Five seeds is a small robustness check. Control 3 used $n=5$ seeds. The keys-effect range (75–93%) is consistent with the headline; a larger sweep would give a tighter interval. We treat five seeds as sufficient to distinguish “stable behavioural effect” from “stable headline feature” but not as sufficient for a tight effect-size estimate.

Position-aggregation choice. The feature signal we analyze is the mean SAE encoding across the last three tokens of the prompt. A finer-grained per-position analysis (which token position carries the discriminating signal?) is supported by the pipeline but not reported here.

VII. CONCLUSION

We took a sparse-feature audit method that has lived mostly in the mechanistic-interpretability literature and applied it to a fixed task corpus to ask which features predict task failure. On 300 IOI prompts with GPT-2 small the method surfaced a

striking single-feature correlate (mean activation $56\times$ higher on failed trials, Neuronpedia label “cryptographic keys”) and a clean behavioural fact (failure rate on the “the keys” subset is 75–93% across seeds vs. 7.5% on the other seven objects). Three controls then revised the reading. The feature fails the ablation; the raw 768-d residual stream matches the predictive power of the top hundred features; the identity of the top feature does not survive a seed change. The behavioural effect is real, but the mechanistic story we initially attached to it is not. We treat the gap between what the audit surfaces and what the controls support as the contribution. The code and data are released. Future applications of the pattern should report the correlates and the controls together; the value of the audit is in their joint output, not in the headline number.

REPRODUCIBILITY

All code, the procedurally-generated 300-prompt corpus, the greedy-decode prediction sheet, the $300 \times 24,576$ activation matrix, the per-feature statistics CSV, the ablation per-task sheet, the raw-activation baseline report, the multi-seed summary, and the figures are released at <https://github.com/mahdinaser/agent-failure-circuits> under the MIT License. The pipeline runs on Apple Silicon (MPS) or CPU; no GPU is required for the GPT-2 small experiment. Total wall-clock on an M3 Max laptop is approximately twenty minutes for the full $N=300$ run plus the per-feature analysis; the ablation, the raw-baseline run, and the five-seed sweep each take under ten minutes on the same hardware. Re-running with a different random seed or extending the corpus to $N > 300$ requires only `python src/build_task_set.py --n <N> --seed <S>` followed by the same run-and-analyze commands.

REFERENCES

- [1] J. Lindsey, A. Templeton, et al., “On the Biology of a Large Language Model,” Anthropic Technical Report, 2025.
- [2] J. Lindsey, A. Templeton, et al., “Tracing the Thoughts of a Large Language Model,” Anthropic, 2025.
- [3] T. Bricken, A. Templeton, J. Batson, et al., “Towards Monosemanticity: Decomposing Language Models with Dictionary Learning,” Anthropic Transformer Circuits Thread, 2023.
- [4] A. Templeton, T. Conerly, J. Marcus, et al., “Scaling Monosemanticity: Extracting Interpretable Features from Claude 3 Sonnet,” Anthropic Transformer Circuits Thread, 2024.
- [5] H. Cunningham, A. Ewart, L. Riggs, R. Huben, and L. Sharkey, “Sparse Autoencoders Find Highly Interpretable Features in Language Models,” *International Conference on Learning Representations (ICLR)*, 2024.
- [6] T. Lieberum, S. Rajamanoharan, A. Conmy, et al., “Gemma Scope: Open Sparse Autoencoders Everywhere All At Once on Gemma 2,” arXiv preprint arXiv:2408.05147, 2024.
- [7] B. A. Olshausen and D. J. Field, “Emergence of Simple-Cell Receptive Field Properties by Learning a Sparse Code for Natural Images,” *Nature*, vol. 381, no. 6583, pp. 607–609, 1996.
- [8] C. Olah, N. Cammarata, L. Schubert, G. Goh, M. Petrov, and S. Carter, “Zoom In: An Introduction to Circuits,” *Distill*, 2020.
- [9] N. Elhage, T. Hume, C. Olsson, et al., “Toy Models of Superposition,” Anthropic Transformer Circuits Thread, 2022.
- [10] S. Arora, Y. Li, Y. Liang, T. Ma, and A. Risteski, “Linear Algebraic Structure of Word Senses, with Applications to Polysemy,” *Transactions of the Association for Computational Linguistics (TACL)*, vol. 6, pp. 483–495, 2018.
- [11] J. Mairal, F. Bach, J. Ponce, and G. Sapiro, “Online Dictionary Learning for Sparse Coding,” *International Conference on Machine Learning (ICML)*, 2009.
- [12] J. Dunefsky, P. Chlenski, and N. Nanda, “Transcoders Find Interpretable LLM Feature Circuits,” arXiv preprint arXiv:2406.11944, 2024.
- [13] J. Lindsey, A. Templeton, J. Marcus, T. Conerly, J. Batson, and C. Olah, “Sparse Crosscoders for Cross-Layer Features and Model Diffing,” Anthropic Transformer Circuits Thread, 2024.
- [14] K. R. Wang, A. Variengien, A. Conmy, B. Shlegeris, and J. Steinhardt, “Interpretability in the Wild: a Circuit for Indirect Object Identification in GPT-2 Small,” *International Conference on Learning Representations (ICLR)*, 2023.
- [15] A. Conmy, A. Mavor-Parker, A. Lynch, S. Heimersheim, and A. Garriga-Alonso, “Towards Automated Circuit Discovery for Mechanistic Interpretability,” *Advances in Neural Information Processing Systems (NeurIPS)*, 2023.
- [16] M. Hanna, O. Liu, and A. Variengien, “How Does GPT-2 Compute Greater-Than?: Interpreting Mathematical Abilities in a Pre-Trained Language Model,” *Advances in Neural Information Processing Systems (NeurIPS)*, 2023.
- [17] A. Goldowsky-Dill, C. MacLeod, L. Sato, and A. Arora, “Localizing Model Behavior with Path Patching,” arXiv preprint arXiv:2304.05969, 2023.
- [18] S. Marks, C. Rager, E. Michaud, et al., “Sparse Feature Circuits: Discovering and Editing Interpretable Causal Graphs in Language Models,” arXiv preprint arXiv:2403.19647, 2024.
- [19] A. Geiger, H. Lu, T. Icard, and C. Potts, “Causal Abstractions of Neural Networks,” *Advances in Neural Information Processing Systems (NeurIPS)*, 2021.
- [20] J. Vig, S. Gehrmann, Y. Belinkov, et al., “Causal Mediation Analysis for Interpreting Neural NLP: The Case of Gender Bias,” arXiv preprint arXiv:2004.12265, 2020.
- [21] K. Meng, D. Bau, A. Andonian, and Y. Belinkov, “Locating and Editing Factual Associations in GPT,” *Advances in Neural Information Processing Systems (NeurIPS)*, 2022.
- [22] J. Bloom, “Open Source Sparse Autoencoders for All Residual Stream Layers of GPT2-Small,” LessWrong / AI Alignment Forum, 2024.
- [23] J. Bloom, A. Kissane, et al., “SAELens: Training, Analyzing, and Visualizing Sparse Autoencoders,” <https://github.com/jbloomAus/SAELens>, 2024.
- [24] J. Lin, et al., “Neuronpedia: An Open Platform for Mechanistic Interpretability Research,” <https://www.neuronpedia.org>, 2024.
- [25] N. Nanda and J. Bloom, “TransformerLens: A Library for Mechanistic Interpretability of Generative Language Models,” <https://github.com/TransformerLensOrg/TransformerLens>, 2022.
- [26] A. Radford, J. Wu, R. Child, D. Luan, D. Amodei, and I. Sutskever, “Language Models are Unsupervised Multitask Learners,” OpenAI Technical Report, 2019.
- [27] B. L. Welch, “The Generalization of ‘Student’s’ Problem when Several Different Population Variances are Involved,” *Biometrika*, vol. 34, no. 1-2, pp. 28–35, 1947.
- [28] J. Cohen, *Statistical Power Analysis for the Behavioral Sciences*, 2nd ed. Routledge, 1988.
- [29] S. Holm, “A Simple Sequentially Rejective Multiple Test Procedure,” *Scandinavian Journal of Statistics*, vol. 6, no. 2, pp. 65–70, 1979.
- [30] F. Pedregosa, G. Varoquaux, A. Gramfort, et al., “Scikit-learn: Machine Learning in Python,” *Journal of Machine Learning Research*, vol. 12, pp. 2825–2830, 2011.
- [31] T. Fawcett, “An Introduction to ROC Analysis,” *Pattern Recognition Letters*, vol. 27, no. 8, pp. 861–874, 2006.
- [32] P. Henderson, R. Islam, P. Bachman, J. Pineau, D. Precup, and D. Meger, “Deep Reinforcement Learning that Matters,” *AAAI Conference on Artificial Intelligence*, 2018.
- [33] J. Pineau, P. Vincent-Lamarre, K. Sinha, et al., “Improving Reproducibility in Machine Learning Research,” *Journal of Machine Learning Research*, vol. 22, no. 164, pp. 1–20, 2021.
- [34] M. Sclar, Y. Choi, Y. Tsvetkov, and A. Suhr, “Quantifying Language Models’ Sensitivity to Spurious Features in Prompt Design,” *International Conference on Learning Representations (ICLR)*, 2024.
- [35] M. Mizrahi, G. Kaplan, D. Malkin, R. Dror, D. Shahaf, and G. Stanovsky, “State of What Art? A Call for Multi-Prompt LLM Evaluation,” *Transactions of the Association for Computational Linguistics (TACL)*, 2024.
- [36] Y. Lu, M. Bartolo, A. Moore, S. Riedel, and P. Stenetorp, “Fantastically Ordered Prompts and Where to Find Them: Overcoming Few-Shot Prompt Order Sensitivity,” *Annual Meeting of the Association for Computational Linguistics (ACL)*, 2022.

- [37] X. Liu, H. Yu, H. Zhang, et al., “AgentBench: Evaluating LLMs as Agents,” *International Conference on Learning Representations (ICLR)*, 2024.
- [38] C. E. Jimenez, J. Yang, A. Wettig, et al., “SWE-bench: Can Language Models Resolve Real-World GitHub Issues?” *International Conference on Learning Representations (ICLR)*, 2024.
- [39] S. Zhou, F. F. Xu, H. Zhu, et al., “WebArena: A Realistic Web Environment for Building Autonomous Agents,” *International Conference on Learning Representations (ICLR)*, 2024.
- [40] M. Nasermoghadas, “What Twelve LLM Agent Benchmark Papers Disclose About Themselves: A Pilot Audit and an Open Scoring Schema,” *IEEE International Conference on Big Data*, 2026 (companion submission).