

# **20MCA243 MOBILE APPLICATION DEVELOPMENT LAB**

*Lab Report Submitted By*

**AMEENA SHERIN.V**

**Reg. No.: AJC20MCA-2012**

*In Partial fulfillment for the Award of the Degree Of*

**MASTER OF COMPUTER APPLICATIONS (2 Year)  
(MCA)**

**APJ ABDUL KALAM TECHNOLOGICAL UNIVERSITY**



**AMAL JYOTHI COLLEGE OF ENGINEERING  
KANJIRAPPALLY**

[Affiliated to APJ Abdul Kalam Technological University, Kerala. Approved by AICTE, Accredited by NAAC with 'A' grade. Koovapally, Kanjirappally, Kottayam, Kerala – 686518]

**2021-2022**

**DEPARTMENT OF COMPUTER APPLICATIONS**  
**AMAL JYOTHI COLLEGE OF ENGINEERING**  
**KANJIRAPPALLY**



**CERTIFICATE**

This is to certify that the lab report, “**20MCA243 MOBILE APPLICATION DEVELOPMENT LAB**” is the bonafide work of **AMEENA SHERIN.V (Reg.No:AJC20MCA-2012)** in partial fulfillment of the requirements for the award of the Degree of Master of Computer Applications under APJ Abdul Kalam Technological University during the year 2021-22.

Ms. Nimmy Francis  
Staff In-Charge

# CONTENT

| <b>S.No</b> | <b>Content</b>  | <b>Date</b> | <b>Page No:</b> |
|-------------|---|-------------|-----------------|
| 1           | Program to develop the android mobile application which consist of GUI components for Login Page creation.                            |             | <b>1</b>        |
| 2           | Program to display the content of EditText in TextView on button click.   |             | <b>8</b>        |
| 3           | Program to design a Login Form with username and password using LinearLayout and toast valid credentials                              |             | <b>12</b>       |
| 4           | Program to implementing basic arithmetic operations of a simple calculator  |             | <b>17</b>       |
| 5           | Program to complement validations on various UI controls  |             | <b>33</b>       |
| 6           | Program to design a registration activity and store registration details in local memory of phone using Intents and SharedPreferences |             | <b>38</b>       |
| 7           | Program to design a simple Calculator using GridLayout and Cascaded LinearLayout  |             | <b>47</b>       |
| 8           | Program to create a Facebook page using RelativeLayout; set properties using .xml file  |             | <b>55</b>       |
| 9           | Program to develop an application that toggles image using FrameLayout  |             | <b>60</b>       |
| 10          | Program to implement Adapters and perform exception handling  |             | <b>63</b>       |
| 11          | Program to implement Intent to navigate between multiple activities (Explicit Intent)   |             | <b>68</b>       |
| 12          | Program to develop an application that works with Implicit intents  |             | <b>71</b>       |
| 13          | Program to implement Options Menu to navigate to activities   |             | <b>77</b>       |
| 14          | Program to develop an application that uses ArrayAdapter with ListView  |             | <b>85</b>       |
| 15          | Program to develop an application that use GridView with images and display Alert box on selection                                    |             | <b>89</b>       |
| 16          | Program to develop an application that implements Spinner component and perform event handling  |             | <b>95</b>       |
| 17          | Program to apply themes via code from manifest file   |             | <b>98</b>       |
| 18          | Program to develop application using Fragments  |             | <b>102</b>      |
| 19          | Program to implement Navigation drawer  |             | <b>108</b>      |

|    |  |  |            |
|----|--|--|------------|
| 20 | Program to implement activity life cycle   |  |            |
| 21 | Program to implement various SQLite operations :<br>(INSERT, UPDATE ,DELETE ,SELECT) |  | <b>113</b> |

**Program no: 01****Aim:**

Program to develop the android mobile application which consist of GUI components for Login Page creation.

**XML Code:**

```
<?xml version="1.0" encoding="utf-8"?>

<androidx.constraintlayout.widget.ConstraintLayout
xmlns:android="http://schemas.android.com/apk/res/android"
xmlns:app="http://schemas.android.com/apk/res-auto"
xmlns:tools="http://schemas.android.com/tools"
android:layout_width="match_parent"
android:layout_height="match_parent"
android:background="@drawable/primary_screen"
tools:context=".LoginActivity">

<ImageView
android:id="@+id/avatar"
android:layout_width="120dp"
android:layout_height="120dp"
android:layout_marginTop="10dp"
android:contentDescription="@string/login_image"
android:src="@drawable/avatar"
app:layout_constraintEnd_toEndOf="parent"
app:layout_constraintHorizontal_bias="0.498"
app:layout_constraintStart_toStartOf="parent"
```

```
app:layout_constraintTop_toTopOf="parent" />
```

```
<TextView
```

```
android:id="@+id/loginText"
```

```
android:layout_width="wrap_content"
```

```
android:layout_height="wrap_content"
```

```
android:layout_marginTop="10dp"
```

```
android:text="@string/login"
```

```
android:textColor="@color/black"
```

```
android:textSize="30sp"
```

```
app:layout_constraintEnd_toEndOf="parent"
```

```
app:layout_constraintHorizontal_bias="0.498"
```

```
app:layout_constraintStart_toStartOf="parent"
```

```
app:layout_constraintTop_toBottomOf="@+id/avatar" />
```

```
<RelativeLayout
```

```
android:id="@+id/loginLoginLayout"
```

```
android:layout_width="match_parent"
```

```
android:layout_height="wrap_content"
```

```
android:layout_marginStart="5dp"
```

```
android:layout_marginEnd="5dp"
```

```
    android:background="@drawable/account_creation"
```

```
app:layout_constraintBottom_toBottomOf="parent"
```

```
app:layout_constraintEnd_toEndOf="parent"
```

```
app:layout_constraintHorizontal_bias="1.0"
```

```
app:layout_constraintStart_toStartOf="parent"
```

```
app:layout_constraintTop_toBottomOf="@+id/loginText"
app:layout_constraintVertical_bias="0.098">
```

```
<EditText
    android:id="@+id/loginUsername"
    android:layout_width="match_parent"
    android:layout_height="40dp"
    android:layout_marginTop="40dp"
    android:autofillHints=""
    android:layout_alignParentTop="true"
    android:hint="@string/username"
    android:layout_alignParentStart="true"
    android:layout_alignParentEnd="true"
    android:inputType="textEmailAddress"
    android:padding="10dp"
    android:layout_marginEnd="20dp"
    android:layout_marginStart="20dp"
    android:textColor="@color/white"
    android:textColorHint="@color/white" />
```

```
<EditText
    android:id="@+id/loginPassword"
    android:layout_width="match_parent"
    android:layout_height="40dp"
    android:layout_below="@+id/loginUsername"
    android:layout_alignParentStart="true"
```

```

android:layout_alignParentEnd="true"
android:layout_marginTop="20dp"
android:layout_marginEnd="20dp"
android:layout_marginStart="20dp"
android:hint="@string/password"
android:inputType="textPassword"
android:padding="10dp"
android:textColor="@color/white"
android:textColorHint="@color/white" />

```

```

<TextView
    android:id="@+id/forgotPasswordText"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_marginTop="20dp"
    android:text="@string/forgot_password"
    android:clickable="true"
    android:textSize="20sp"
    android:layout_marginStart="30dp"
    android:layout_alignParentStart="true"
    android:layout_below="@+id/loginPassword"/>
<com.blure.complexview.ComplexView
    android:id="@+id/shadowLoginButton"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    app:radius="20dp"

```



```

app:shadow="true"
app:shadowAlpha="100"
app:shadowColor="#2962FF"
android:padding="10dp"
android:layout_below="@+id/forgotPasswordText"
android:layout_marginTop="30dp"
app:shadowSpread="2">

<Button
    android:id="@+id/loginButton"
    android:layout_width="match_parent"
    android:layout_height="46dp"
        android:background="@drawable/password_reset_buttons"
    android:text="@string/sign_in" />
</androidx.constraintlayout.widget.ConstraintLayout>

```

### Java Code:

```

import androidx.annotation.NonNull;
import androidx.appcompat.app.AlertDialog;
import androidx.appcompat.app.AppCompatActivity;

import android.view.View;
import android.view.ViewGroup;
import android.widget.Button;
import android.widget.EditText;
import android.widget.ImageView;

```

```
import android.widget.TextView;

import android.widget.Toast;


public class LoginActivity extends AppCompatActivity {

    EditText loginName, loginPwd;

    Button login;

    @Override

    protected void onCreate(Bundle savedInstanceState) {

        super.onCreate(savedInstanceState);

        setContentView(R.layout.activity_login);


        loginName = findViewById(R.id.loginUsername);

        loginPwd = findViewById(R.id.loginPassword);

        login = findViewById(R.id.loginButton);

        login.setOnClickListener(new View.OnClickListener() {

            @Override

            public void onClick(View v) {

                String uName, passwd;

                uName = loginName.getText().toString();

                passwd = loginPwd.getText().toString();


                Toast.makeText(LoginActivity.this, "Welcome", Toast.LENGTH_SHORT).show();

            }

        });

    }


}
```

```
});
```

```
}
```

```
}
```

### Output:

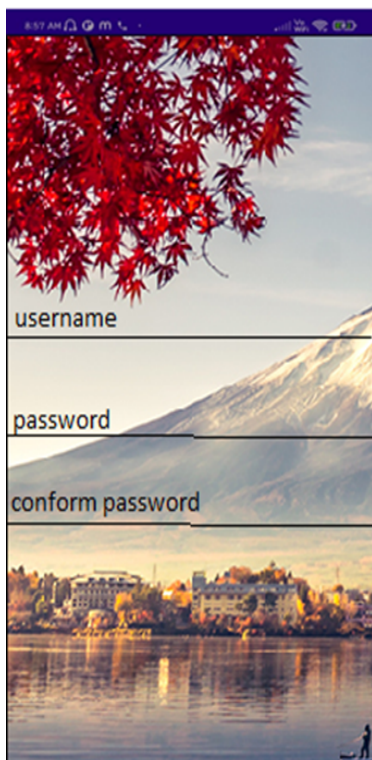

**Program no: 02****Aim:**

Program to display the content of EditText in TextView on button click.

**XML Code:**

```
<?xml version="1.0" encoding="utf-8"?>

<androidx.constraintlayout.widget.ConstraintLayout
xmlns:android="http://schemas.android.com/apk/res/android"

xmlns:app="http://schemas.android.com/apk/res-auto"

xmlns:tools="http://schemas.android.com/tools"

android:layout_width="match_parent"

android:layout_height="match_parent"

tools:context=".MainActivity">

<TextView

android:id="@+id/txt1"

android:layout_width="182dp"

android:layout_height="54dp"

app:layout_constraintBottom_toBottomOf="parent"

app:layout_constraintHorizontal_bias="0.497"

app:layout_constraintLeft_toLeftOf="parent"

app:layout_constraintRight_toRightOf="parent"

app:layout_constraintTop_toBottomOf="@+id/btn1"

app:layout_constraintVertical_bias="0.356" />

<EditText
```

```

android:id="@+id/edt1"
android:layout_width="300dp"
android:layout_height="40dp"
android:layout_marginTop="136dp"
app:layout_constraintEnd_toEndOf="parent"
app:layout_constraintHorizontal_bias="0.495"
app:layout_constraintStart_toStartOf="parent"
app:layout_constraintTop_toTopOf="parent"
app:layout_constraintVertical_bias="0.85" />

<Button
android:id="@+id/btn1"
android:layout_width="122dp"
android:layout_height="43dp"
android:layout_marginTop="48dp"
android:text="Button"
app:layout_constraintEnd_toEndOf="parent"
app:layout_constraintHorizontal_bias="0.498"
app:layout_constraintStart_toStartOf="parent"
app:layout_constraintTop_toBottomOf="@+id/edt1" />
</androidx.constraintlayout.widget.ConstraintLayout>

```

### Java Code:

```

package com.example.textview;

import androidx.appcompat.app.AppCompatActivity;

```

```
import android.os.Bundle;

import android.view.View;

import android.widget.Button;

import android.widget.EditText;

import android.widget.TextView;

import android.widget.Toast;


public class MainActivity extends AppCompatActivity {

    Button b1;

    EditText e1;

    TextView t1;


    @Override

    protected void onCreate(Bundle savedInstanceState) {

        super.onCreate(savedInstanceState);

        setContentView(R.layout.activity_main);

        e1 = findViewById(R.id.edt1);

        b1=findViewById(R.id.btn1);

        t1=findViewById(R.id.txt1);

        b1.setOnClickListener(new View.OnClickListener() {

            @Override

            public void onClick(View v) {


                String value=e1.getText().toString();

                t1.setText(value);
```

```
}  
});
```

```
}  
}
```

### Output:

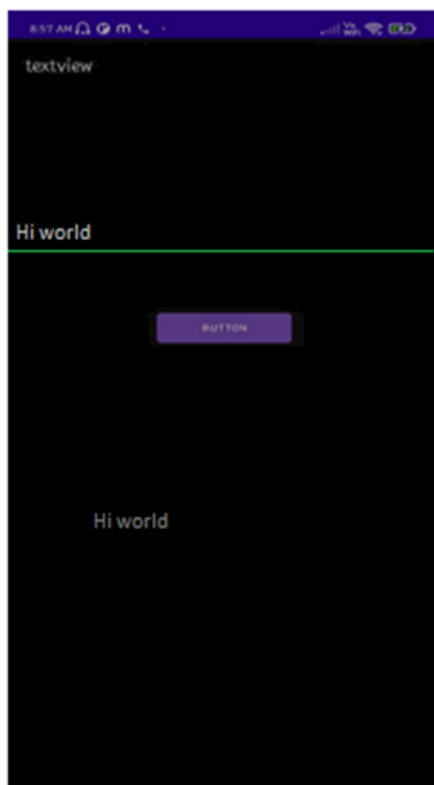

**Program no: 03****Aim:**

Program to design a Login Form with username and password using LinearLayout and toast valid credentials

**XML Code:**

```
<?xml version="1.0" encoding="utf-8"?>

<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:orientation="vertical"
    android:background="#ecdaf2"
    tools:context=".MainActivity">

    <TextView
        android:id="@+id/txt1"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:layout_marginTop="10dp"
        android:padding="20dp"
```



android:textAlignment="center"

android:textSize="20sp"

android:text="Login form"/>

<EditText

android:id="@+id/edt1"

android:layout\_width="match\_parent"

android:layout\_height="wrap\_content"

android:layout\_marginTop="100dp"

android:paddingStart="10dp"

android:hint="Username" />

<TextView

android:id="@+id/t1"

android:layout\_width="wrap\_content"

android:layout\_height="wrap\_content"

android:visibility="gone"

android:padding="10dp"

android:text="\*Please enter username"

android:textColor="@color/red"/>

<EditText

android:id="@+id/edt2"

android:layout\_width="match\_parent"

android:layout\_height="wrap\_content"

android:layout\_marginTop="50dp"

android:paddingStart="10dp"

```

android:hint="Password" />
<TextView
    android:id="@+id/t2"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:visibility="gone"
    android:padding="10dp"
    android:text="*Please enter password"
    android:textColor="@color/red"/>

```

```

<Button
    android:id="@+id/btn1"
    android:layout_width="150dp"
    android:layout_height="40dp"
    android:layout_gravity="center"
    android:text="Sign In"
    android:layout_marginTop="20dp"
/>
</LinearLayout>

```

### Java Code:

```

package com.example.logformvalid;

import androidx.appcompat.app.AppCompatActivity;

import android.os.Bundle;

```

```

import android.view.View;

import android.widget.Button;

import android.widget.EditText;

import android.widget.TextView;

import android.widget.Toast;


public class MainActivity extends AppCompatActivity {

    EditText e1,e2;

    TextView t1, t2;

    Button b1;


    @Override

    protected void onCreate(Bundle savedInstanceState) {

        super.onCreate(savedInstanceState);

        setContentView(R.layout.activity_main);

        e1=findViewById(R.id.edt1);

        e2=findViewById(R.id.edt2);

        t1 = findViewById(R.id.t1);

        t2 = findViewById(R.id.t2);

        b1=findViewById(R.id.btn1);

        b1.setOnClickListener(new View.OnClickListener() {

            @Override

            public void onClick(View v) {

                String username,password;

                username=e1.getText().toString();

                password=e2.getText().toString();

```

```
if (username.isEmpty()){  
    t1.setVisibility(View.VISIBLE);  
    Toast.makeText(MainActivity.this, "Username is empty", Toast.LENGTH_SHORT).show();  
}  
else if (password.isEmpty()){  
    t2.setVisibility(View.VISIBLE);  
    Toast.makeText(MainActivity.this, "Password is empty", Toast.LENGTH_SHORT).show();  
}else  
    Toast.makeText(MainActivity.this, "Login success", Toast.LENGTH_SHORT).show();  
}  
});  
}  
}
```

**Output:**

**Program no: 04****Aim:**

Program to implementing basic arithmetic operations of a simple calculator.

**XML Code:**

```
<?xml version="1.0" encoding="utf-8"?>

<androidx.constraintlayout.widget.ConstraintLayout
xmlns:android="http://schemas.android.com/apk/res/android"
xmlns:app="http://schemas.android.com/apk/res-auto"
xmlns:tools="http://schemas.android.com/tools"
android:layout_width="match_parent"
android:layout_height="match_parent"
tools:context=".MainActivity">

<TextView
android:id="@+id/txt1"
android:layout_width="match_parent"
android:layout_height="wrap_content"
android:text="@string/calc"
app:layout_constraintStart_toStartOf="parent"
app:layout_constraintEnd_toEndOf="parent"
app:layout_constraintTop_toTopOf="parent"
android:padding="20dp"/>

<TextView
android:id="@+id/txt2"
```

```

android:layout_width="match_parent"
android:layout_height="wrap_content"
android:text="20"
app:layout_constraintStart_toStartOf="parent"
android:gravity="end"
app:layout_constraintBottom_toTopOf="@+id/grid"
android:layout_marginTop="60dp"
app:layout_constraintEnd_toEndOf="parent"
app:layout_constraintTop_toBottomOf="@+id/txt1"
android:padding="20dp"/>

```

```

<GridLayout
android:id="@+id/grid"
android:layout_width="match_parent"
android:layout_height="wrap_content"
app:layout_constraintStart_toStartOf="parent"
app:layout_constraintEnd_toEndOf="parent"
android:rowCount="3"
android:columnCount="4"
app:layout_constraintBottom_toBottomOf="parent">

```

```

<Button
android:layout_height="80dp"
android:layout_width="wrap_content"
android:layout_margin="7dp"
android:text="C"/>

```

```
<Button  
    android:layout_height="80dp"  
    android:layout_width="wrap_content"  
    android:layout_margin="7dp"  
    android:text="Back"/>
```

```
<Button  
    android:layout_height="80dp"  
    android:layout_width="wrap_content"  
    android:layout_margin="7dp"  
    android:text="%"/>
```

```
<Button  
    android:layout_height="80dp"  
    android:layout_width="wrap_content"  
    android:layout_margin="7dp"  
    android:text="/">
```

```
<Button  
    android:layout_height="80dp"  
    android:layout_width="wrap_content"  
    android:background="@drawable/button_number"  
    android:layout_margin="7dp"  
    android:text="7"/>
```

```
<Button  
    android:layout_height="80dp"  
    android:layout_width="wrap_content"  
    android:layout_margin="7dp"  
    android:background="@drawable/button_number"
```

```
android:text="8"/>
```

```
<Button
```

```
android:layout_height="80dp"
```

```
android:layout_width="wrap_content"
```

```
android:layout_margin="7dp"
```

```
android:background="@drawable/button_number"
```

```
android:text="9"/>
```

```
<Button
```

```
android:layout_height="80dp"
```

```
android:layout_width="wrap_content"
```

```
android:layout_margin="7dp"
```

```
android:text="X"/>
```

```
<Button
```

```
android:layout_height="80dp"
```

```
android:layout_width="wrap_content"
```

```
android:background="@drawable/button_number"
```

```
android:layout_margin="7dp"
```

```
android:text="4"/>
```

```
<Button
```

```
android:layout_height="80dp"
```

```
android:layout_width="wrap_content"
```

```
android:background="@drawable/button_number"
```

```
android:layout_margin="7dp"
```

```
android:text="5"/>
```

```
<Button
```



```
android:layout_height="80dp"
android:layout_width="wrap_content"
android:background="@drawable/button_number"
android:layout_margin="7dp"
android:text="6"/>
```

```
<Button
```

```
android:layout_height="80dp"
android:layout_width="wrap_content"
android:layout_margin="7dp"
android:text="-"/>
```

```
<Button
```

```
android:layout_height="80dp"
android:layout_width="wrap_content"
android:background="@drawable/button_number"
android:layout_margin="7dp"
android:text="1"/>
```

```
<Button
```

```
android:layout_height="80dp"
android:layout_width="wrap_content"
android:background="@drawable/button_number"
android:layout_margin="7dp"
android:text="2"/>
```

```
<Button
```

```
android:layout_height="80dp"
android:layout_width="wrap_content"
```

```
android:background="@drawable/button_number"
```

```
android:layout_margin="7dp"
```

```
android:text="3"/>
```

```
<Button
```

```
android:layout_height="80dp"
```

```
android:layout_width="wrap_content"
```

```
android:layout_margin="7dp"
```

```
android:text="+"/>
```

```
<Button
```

```
android:layout_height="80dp"
```

```
android:layout_width="wrap_content"
```

```
android:layout_margin="7dp"
```

```
android:text="--"/>
```

```
<Button
```

```
android:layout_height="80dp"
```

```
android:layout_width="wrap_content"
```

```
android:background="@drawable/button_number"
```

```
android:layout_margin="7dp"
```

```
android:text="0"/>
```

```
<Button
```

```
android:layout_height="80dp"
```

```
android:layout_width="wrap_content"
```

```
android:layout_margin="7dp"
```

```
android:text="."/>
```

```
<Button
```

```

android:layout_height="80dp"
android:layout_width="wrap_content"
android:layout_margin="7dp"
android:text=""/>
</GridLayout>
</androidx.constraintlayout.widget.ConstraintLayout>

```

### Java Code:

```
#MainActivity.java
```

```
package com.example.calculator;
```

```
import androidx.appcompat.app.AppCompatActivity;
```

```
import android.os.Bundle;
```

```
import android.view.View;
```

```
import android.widget.Button;
```

```
import android.widget.TextView;
```

```
public class MainActivity extends AppCompatActivity {
```

```
    double input1 = 0, input2 = 0;
```

```
    TextView edt1;
```

```
    boolean Addition, Subtract, Multiplication, Division, mRemainder, decimal;
```

```
    Button button0, button1, button2, button3, button4, button5, button6, button7, button8,
    button9, buttonAdd, buttonSub,
```

buttonMul, buttonDivision, buttonEqual, buttonDel, buttonDot, Remainder;

@Override

protected void onCreate(Bundle savedInstanceState) {

super.onCreate(savedInstanceState);

setContentView(R.layout.activity\_main);

button0 = (Button) findViewById(R.id.button0);

button1 = (Button) findViewById(R.id.button1);

button2 = (Button) findViewById(R.id.button2);

button3 = (Button) findViewById(R.id.button3);

button4 = (Button) findViewById(R.id.button4);

button5 = (Button) findViewById(R.id.button5);

button6 = (Button) findViewById(R.id.button6);

button7 = (Button) findViewById(R.id.button7);

button8 = (Button) findViewById(R.id.button8);

button9 = (Button) findViewById(R.id.button9);

buttonDot = (Button) findViewById(R.id.buttonDot);

buttonAdd = (Button) findViewById(R.id.buttonadd);

buttonSub = (Button) findViewById(R.id.buttonsub);

buttonMul = (Button) findViewById(R.id.buttonmul);

buttonDivision = (Button) findViewById(R.id.buttondiv);

Remainder = (Button) findViewById(R.id.Remainder);

buttonDel = (Button) findViewById(R.id.buttonDel);

buttonEqual = (Button) findViewById(R.id.buttoneq);

```
edt1 = (TextView) findViewById(R.id.display);
```

```
button1.setOnClickListener(new View.OnClickListener() {  
    @Override  
    public void onClick(View v) {  
        edt1.setText(edt1.getText() + "1");  
    }  
});
```

```
button2.setOnClickListener(new View.OnClickListener() {  
    @Override  
    public void onClick(View v) {  
        edt1.setText(edt1.getText() + "2");  
    }  
});
```

```
button3.setOnClickListener(new View.OnClickListener() {  
    @Override  
    public void onClick(View v) {  
        edt1.setText(edt1.getText() + "3");  
    }  
});
```

```
button4.setOnClickListener(new View.OnClickListener() {  
    @Override  
    public void onClick(View v) {
```

```
edt1.setText(edt1.getText() + "4");  
  
}  
  
});
```

```
button5.setOnClickListener(new View.OnClickListener() {  
  
    @Override  
  
    public void onClick(View v) {  
  
        edt1.setText(edt1.getText() + "5");  
  
    }  
  
});
```

```
button6.setOnClickListener(new View.OnClickListener() {  
  
    @Override  
  
    public void onClick(View v) {  
  
        edt1.setText(edt1.getText() + "6");  
  
    }  
  
});
```

```
button7.setOnClickListener(new View.OnClickListener() {  
  
    @Override  
  
    public void onClick(View v) {  
  
        edt1.setText(edt1.getText() + "7");  
  
    }  
  
});
```

```
button8.setOnClickListener(new View.OnClickListener() {  
  
    @Override
```

```

public void onClick(View v) {
    edt1.setText(edt1.getText() + "8");
}
});

```

```

button9.setOnClickListener(new View.OnClickListener() {
    @Override
    public void onClick(View v) {
        edt1.setText(edt1.getText() + "9");
    }
});

```

```

button0.setOnClickListener(new View.OnClickListener() {
    @Override
    public void onClick(View v) {
        edt1.setText(edt1.getText() + "0");
    }
});

```

```

buttonAdd.setOnClickListener(new View.OnClickListener() {
    @Override
    public void onClick(View v) {
        if (edt1.getText().length() != 0) {
            input1 = Float.parseFloat(edt1.getText() + "");
            Addition = true;
            decimal = false;

```

```
edt1.setText(null);

}

}

});
```

```
buttonSub.setOnClickListener(new View.OnClickListener() {

@Override

public void onClick(View v) {

if (edt1.getText().length() != 0) {

input1 = Float.parseFloat(edt1.getText() + "");

Subtract = true;

decimal = false;

edt1.setText(null);

}

}

});
```

```
buttonMul.setOnClickListener(new View.OnClickListener() {

@Override

public void onClick(View v) {

if (edt1.getText().length() != 0) {

input1 = Float.parseFloat(edt1.getText() + "");

Multiplication = true;

decimal = false;

edt1.setText(null);

}

}

});
```



```

}
});

```

```

buttonDivision.setOnClickListener(new View.OnClickListener() {

@Override

public void onClick(View v) {

if (edt1.getText().length() != 0) {

input1 = Float.parseFloat(edt1.getText() + "");

Division = true;

decimal = false;

edt1.setText(null);

}

}

});

```

```

Remainder.setOnClickListener(new View.OnClickListener() {

@Override

public void onClick(View v) {

if (edt1.getText().length() != 0) {

input1 = Float.parseFloat(edt1.getText() + "");

mRemainder = true;

decimal = false;

edt1.setText(null);

}

}

});

```

```
buttonEqual.setOnClickListener(new View.OnClickListener() {  
    @Override  
    public void onClick(View v) {  
        if (Addition || Subtract || Multiplication || Division || mRemainder) {  
            input2 = Float.parseFloat(edt1.getText() + "");  
        }  
  
        if (Addition) {  
  
            edt1.setText(input1 + input2 + "");  
            Addition = false;  
        }  
  
        if (Subtract) {  
  
            edt1.setText(input1 - input2 + "");  
            Subtract = false;  
        }  
  
        if (Multiplication) {  
            edt1.setText(input1 * input2 + "");  
            Multiplication = false;  
        }  
  
        if (Division) {
```

```

edt1.setText(input1 / input2 + "");
Division = false;
}
if (mRemainder) {
edt1.setText(input1 % input2 + "");
mRemainder = false;
}
}
});

```

```

buttonDel.setOnClickListener(new View.OnClickListener() {
@Override
public void onClick(View v) {
edt1.setText("");
input1 = 0.0;
input2 = 0.0;
}
});

```

```

buttonDot.setOnClickListener(new View.OnClickListener() {
@Override
public void onClick(View v) {
if (decimal) {
//do nothing or you can show the error
} else {
edt1.setText(edt1.getText() + ".");
}
}
});

```

```
decimal = true;
```

```
}
```

```
}
```

```
});
```

```
}
```

```
public void onClick(View view) {
```

```
}
```

```
}
```

### Output:



**Program no: 05****Aim:**

Program to complement validations on various UI controls.

**XML Code:**

```
<?xml version="1.0" encoding="utf-8"?>

<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:tools="http://schemas.android.com/tools" android:layout_width="match_parent"
    android:layout_height="match_parent" android:orientation="vertical"

    tools:context=".Ui_validation" tools:ignore="HardcodedText">

    <EditText android:id="@+id/firstName"

        android:layout_width="match_parent" android:layout_height="wrap_content"
        android:layout_marginStart="16dp" android:layout_marginTop="16dp"
        android:layout_marginEnd="16dp" android:hint="First Name" android:inputType="text" />

    <EditText android:id="@+id/lastName"

        android:layout_width="match_parent" android:layout_height="wrap_content"
        android:layout_marginStart="16dp" android:layout_marginTop="16dp"
        android:layout_marginEnd="16dp" android:hint="Last Name" android:inputType="text" />

    <EditText android:id="@+id/email"

        android:layout_width="match_parent" android:layout_height="wrap_content"
        android:layout_marginStart="16dp" android:layout_marginTop="16dp"
        android:layout_marginEnd="16dp" android:hint="Email"
        android:inputType="textEmailAddress" />

    <EditText android:id="@+id/password"

        android:layout_width="match_parent" android:layout_height="wrap_content"
        android:layout_marginStart="16dp" android:layout_marginTop="16dp"
```

```
android:layout_marginEnd="16dp" android:hint="Password"
android:inputType="textPassword" />
```

```
<LinearLayout android:layout_width="match_parent" android:layout_height="wrap_content"
android:layout_marginTop="8dp" android:gravity="end" android:orientation="horizontal">
```

```
<Button
```

```
android:id="@+id/cancelButton" style="@style/Widget.AppCompat.Button.Borderless"
android:layout_width="wrap_content" android:layout_height="wrap_content"
android:layout_marginEnd="4dp" android:text="CANCEL"
android:textColor="@color/white" />
```

```
<Button
```

```
android:id="@+id/proceedButton" android:layout_width="wrap_content"
android:layout_height="wrap_content" android:layout_marginEnd="16dp"
android:backgroundTint="@color/black" android:text="PROCEED"
```

```
android:textColor="@android:color/white" tools:ignore="ButtonStyle" />
```

```
</LinearLayout>
```

```
</LinearLayout>
```

### Java Code:

```
package com.example.validation;
```

```
import androidx.appcompat.app.AppCompatActivity; import android.content.Intent;
```

```

import android.os.Bundle; import android.view.View; import android.widget.Button; import
android.widget.EditText;

public class Ui_validation extends AppCompatActivity {

    // two buttons

    Button bCancel, bProceed;

    // four text fields

    EditText etFirstName, etLastName, etEmail, etPassword;

    // one boolean variable to check whether all the text fields

    // are filled by the user, properly or not. boolean isAllFieldsChecked = false;

    @Override

    protected void onCreate(Bundle savedInstanceState) { super.onCreate(savedInstanceState);
    setContentView(R.layout.activity_ui_validation);

    // register buttons with their proper IDs. bProceed = findViewById(R.id.proceedButton);
    bCancel = findViewById(R.id.cancelButton);

    // register all the EditText fields with their IDs. etFirstName = findViewById(R.id.firstName);
    etLastName = findViewById(R.id.lastName); etEmail = findViewById(R.id.email);
    etPassword = findViewById(R.id.password);

    // handle the PROCEED button bProceed.setOnClickListener(new View.OnClickListener() {

    @Override

    public void onClick(View v) {

    // store the returned value of the dedicated function which checks

    // whether the entered data is valid or if any fields are left blank. isAllFieldsChecked =
    CheckAllFields();

    // the boolean variable turns to be true then

    // only the user must be proceed to the activity2

```

```

if (isAllFieldsChecked) {

Intent i = new Intent(Ui_validation.this, Dashboard.class); startActivity(i);

}

}

});

// if user presses the cancel button then close the

// application or the particular activity. bCancel.setOnClickListener(new
View.OnClickListener() {

@Override

public void onClick(View v) { Ui_validation.this.finish(); System.exit(0);

}

});

}

// function which checks all the text fields

// are filled or not by the user.

// when user clicks on the PROCEED button

// this function is triggered.

private boolean CheckAllFields() { if (etFirstName.length() == 0) {

etFirstName.setError("This field is required"); return false;

}

if (etLastName.length() == 0) { etLastName.setError("This field is required"); return false;

}

}

```



```

if (etEmail.length() == 0) { etEmail.setError("Email is required"); return false;
}

if (etPassword.length() == 0) { etPassword.setError("Password is required"); return false;
} else if (etPassword.length() < 8) {

etPassword.setError("Password must be minimum 8 characters"); return false;

}

// after all validation return true. return true;

}

}

```

### Output:



**Program no: 06****Aim:**

Program to design a registration activity and store registration details in local memory of phone using Intents and SharedPreferences

**XML Code:**

```
<?xml version="1.0" encoding="utf-8"?>

<androidx.constraintlayout.widget.ConstraintLayout
xmlns:android="http://schemas.android.com/apk/res/android"

xmlns:app="http://schemas.android.com/apk/res-auto"

xmlns:tools="http://schemas.android.com/tools"

android:layout_width="match_parent"

android:layout_height="match_parent"

tools:context=".MainActivity">

<TextView

android:id="@+id/txt1"

android:layout_width="wrap_content"

android:layout_height="wrap_content"

android:text="Registration"

android:layout_marginTop="50dp"

android:textSize="25sp"

app:layout_constraintLeft_toLeftOf="parent"

app:layout_constraintRight_toRightOf="parent"

app:layout_constraintTop_toTopOf="parent" />

<EditText
```

```

android:id="@+id/edt1"
android:layout_width="match_parent"
android:layout_height="wrap_content"
android:layout_marginTop="100dp"
app:layout_constraintStart_toStartOf="parent"
app:layout_constraintEnd_toEndOf="parent"
android:paddingStart="10dp"
app:layout_constraintTop_toBottomOf="@+id/txt1"
android:hint="Name"/>
<EditText
android:id="@+id/edt2"
android:layout_width="match_parent"
android:layout_height="wrap_content"
android:layout_marginTop="10dp"
app:layout_constraintStart_toStartOf="parent"
app:layout_constraintEnd_toEndOf="parent"
android:paddingStart="10dp"
app:layout_constraintTop_toBottomOf="@+id/edt1"
android:hint="Email"/>
<EditText
android:id="@+id/edt3"
android:layout_width="match_parent"
android:layout_height="wrap_content"
android:layout_marginTop="10dp"
app:layout_constraintStart_toStartOf="parent"
app:layout_constraintEnd_toEndOf="parent"

```

```

android:paddingStart="10dp"
app:layout_constraintTop_toBottomOf="@+id/edt2"
android:hint="Password"/>

```

```

<Button
    android:layout_width="wrap_content"
    android:id="@+id/btn1"
    android:layout_height="wrap_content"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintTop_toBottomOf="@+id/edt3"
    android:layout_marginTop="30dp"
    android:text="Register"/>

```

```

</androidx.constraintlayout.widget.ConstraintLayout>
.constraintlayout.widget.ConstraintLayout>

```

#activity2.xml

```

<?xml version="1.0" encoding="utf-8"?>

<androidx.constraintlayout.widget.ConstraintLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"

```

```
tools:context=".MainActivity2">
```

```
<TextView
```

```
android:id="@+id/txt1"
```

```
android:layout_width="match_parent"
```

```
android:layout_height="wrap_content"
```

```
app:layout_constraintStart_toStartOf="parent"
```

```
app:layout_constraintEnd_toEndOf="parent"
```

```
app:layout_constraintTop_toTopOf="parent"
```

```
android:layout_marginTop="70dp"
```

```
android:layout_marginHorizontal="20dp"/>
```

```
<TextView
```

```
android:id="@+id/txt2"
```

```
android:layout_width="match_parent"
```

```
android:layout_height="wrap_content"
```

```
app:layout_constraintStart_toStartOf="parent"
```

```
app:layout_constraintEnd_toEndOf="parent"
```

```
app:layout_constraintTop_toBottomOf="@+id/txt1"
```

```
android:layout_marginTop="70dp"
```

```
android:layout_marginHorizontal="20dp"/>
```

```
<TextView
```

```
android:id="@+id/txt3"
```

```
android:layout_width="match_parent"
```

```
android:layout_height="wrap_content"
```

```

app:layout_constraintStart_toStartOf="parent"
app:layout_constraintEnd_toEndOf="parent"
app:layout_constraintTop_toBottomOf="@+id/txt2"
android:layout_marginTop="70dp"
android:layout_marginHorizontal="20dp"/>

</androidx.constraintlayout.widget.ConstraintLayout>

```

### Java Code:

```

package com.example.sharedpref;

import androidx.appcompat.app.AppCompatActivity;

import android.content.Intent;
import android.content.SharedPreferences;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.Toast;

public class MainActivity extends AppCompatActivity {

    EditText e1, e2, e3;

```

```
Button b1;
```

```
@Override
```

```
protected void onCreate(Bundle savedInstanceState) {
```

```
    super.onCreate(savedInstanceState);
```

```
    setContentView(R.layout.activity_main);
```

```
    e1 = findViewById(R.id.edt1);
```

```
    e2 = findViewById(R.id.edt2);
```

```
    e3 = findViewById(R.id.edt3);
```

```
    b1 = findViewById(R.id.btn1);
```

```
    b1.setOnClickListener(new View.OnClickListener() {
```

```
        @Override
```

```
        public void onClick(View v) {
```

```
            String a, b, c;
```

```
            a = e1.getText().toString();
```

```
            b = e2.getText().toString();
```

```
            c = e3.getText().toString();
```

```
            SharedPreferences sharedPreferences = getSharedPreferences("myKey", MODE_PRIVATE);
```

```
            SharedPreferences.Editor editor = sharedPreferences.edit();
```

```
            editor.putString("name", a);
```

```
            editor.putString("email", b);
```

```
            editor.putString("password", c);
```

```
            editor.apply();
```

```
Intent intent = new Intent(MainActivity.this, MainActivity2.class);
startActivity(intent);

}

});

}

}
```

### **#mainactivity2.java**

```
package com.example.shared preference;

import androidx.appcompat.app.AppCompatActivity;

import android.content.SharedPreferences;
import android.os.Bundle;
import android.widget.TextView;
import android.widget.Toast;

public class MainActivity2 extends AppCompatActivity {

    TextView t1, t2, t3;

    @Override
```



```
protected void onCreate(Bundle savedInstanceState) {  
    super.onCreate(savedInstanceState);  
    setContentView(R.layout.activity_main2);  
  
    t1 = findViewById(R.id.txt1);  
    t2 = findViewById(R.id.txt2);  
    t3 = findViewById(R.id.txt3);  
  
    SharedPreferences sharedPreferences = getSharedPreferences("myKey", MODE_PRIVATE);  
    String name, email, password;  
    name = "Name: "+sharedPreferences.getString("name", "");  
    email = "Email: "+sharedPreferences.getString("email", "");  
    password = "Password: "+sharedPreferences.getString("password", "");  
  
    t1.setText(name);  
    t2.setText(email);  
    t3.setText(password);  
}  
}
```

**Output:**

shrdpref

Registration

Ameena

ameenasherin@gmail.com

ameenaamee

REGISTER

shrdpref

Name: Ameena

Email: ameenasherin@gmail.com

password: ameenaamee

**Program no: 07****Aim:**

Program to design a simple Calculator using GridLayout and Cascaded LinearLayout

**XML Code:**

```
<?xml version="1.0" encoding="utf-8"?>

<androidx.constraintlayout.widget.ConstraintLayout
xmlns:android="http://schemas.android.com/apk/res/android"

xmlns:app="http://schemas.android.com/apk/res-auto"

xmlns:tools="http://schemas.android.com/tools"

android:layout_width="match_parent"

android:layout_height="match_parent"

tools:context=".MainActivity">

<TextView

android:id="@+id/txt1"

android:layout_width="match_parent"

android:layout_height="wrap_content"

android:text="@string/calculator"

app:layout_constraintStart_toStartOf="parent"

app:layout_constraintEnd_toEndOf="parent"

app:layout_constraintTop_toTopOf="parent"

android:padding="20dp"/>

<TextView
```

```

android:id="@+id/txt2"
android:layout_width="match_parent"
android:layout_height="wrap_content"
android:text="20"
app:layout_constraintStart_toStartOf="parent"
android:gravity="end"
app:layout_constraintBottom_toTopOf="@+id/grid"
android:layout_marginTop="60dp"
app:layout_constraintEnd_toEndOf="parent"
app:layout_constraintTop_toBottomOf="@+id/txt1"
android:padding="20dp"/>

```

```
<GridLayout
```

```

android:id="@+id/grid"
android:layout_width="match_parent"
android:layout_height="wrap_content"
app:layout_constraintStart_toStartOf="parent"
app:layout_constraintEnd_toEndOf="parent"
android:rowCount="3"
android:columnCount="4"
app:layout_constraintBottom_toBottomOf="parent">

```

```
<Button
```

```

android:layout_height="80dp"
android:layout_width="wrap_content"
android:layout_margin="7dp"

```

```
android:text="C"/>

<Button

android:layout_height="80dp"

android:layout_width="wrap_content"

android:layout_margin="7dp"

android:text="Back"/>

<Button

android:layout_height="80dp"

android:layout_width="wrap_content"

        android:layout_margin="7dp"

android:text="%"/>

<Button

android:layout_height="80dp"

android:layout_width="wrap_content"

android:layout_margin="7dp"

android:text="/">

<Button

android:layout_height="80dp"

android:layout_width="wrap_content"

android:background="@drawable/button_number"

android:layout_margin="7dp"

android:text="7"/>

<Button

android:layout_height="80dp"

android:layout_width="wrap_content"

android:layout_margin="7dp"
```

```
android:background="@drawable/button_number"
```

```
android:text="8"/>
```

```
<Button
```

```
android:layout_height="80dp"
```

```
android:layout_width="wrap_content"
```

```
android:layout_margin="7dp"
```

```
android:background="@drawable/button_number"
```

```
android:text="9"/>
```

```
<Button
```

```
android:layout_height="80dp"
```

```
android:layout_width="wrap_content"
```

```
android:layout_margin="7dp"
```

```
android:text="X"/>
```

```
<Button
```

```
android:layout_height="80dp"
```

```
android:layout_width="wrap_content"
```

```
android:background="@drawable/button_number"
```

```
android:layout_margin="7dp"
```

```
android:text="4"/>
```

```
<Button
```

```
android:layout_height="80dp"
```

```
android:layout_width="wrap_content"
```

```
android:background="@drawable/button_number"
```

```
android:layout_margin="7dp"
```

```
android:text="5"/>
```

```
<Button  
    android:layout_height="80dp"  
    android:layout_width="wrap_content"  
    android:background="@drawable/button_number"  
    android:layout_margin="7dp"  
    android:text="6"/>
```

```
<Button  
    android:layout_height="80dp"  
    android:layout_width="wrap_content"  
    android:layout_margin="7dp"  
    android:text="-"/>
```

```
<Button  
    android:layout_height="80dp"  
    android:layout_width="wrap_content"  
    android:background="@drawable/button_number"  
    android:layout_margin="7dp"  
    android:text="1"/>
```

```
<Button  
    android:layout_height="80dp"  
    android:layout_width="wrap_content"  
    android:background="@drawable/button_number"  
    android:layout_margin="7dp"  
    android:text="2"/>
```

```
<Button  
    android:layout_height="80dp"
```

```
android:layout_width="wrap_content"  
android:background="@drawable/button_number"  
android:layout_margin="7dp"  
android:text="3"/>
```

```
<Button
```

```
android:layout_height="80dp"  
android:layout_width="wrap_content"  
android:layout_margin="7dp"  
android:text="+"/>
```

```
<Button
```

```
android:layout_height="80dp"  
android:layout_width="wrap_content"  
android:layout_margin="7dp"  
android:text="--"/>
```

```
<Button
```

```
android:layout_height="80dp"  
android:layout_width="wrap_content"  
android:background="@drawable/button_number"  
android:layout_margin="7dp"  
android:text="0"/>
```

```
<Button
```

```
android:layout_height="80dp"  
android:layout_width="wrap_content"  
android:layout_margin="7dp"  
android:text="."/>
```



```

<Button
    android:layout_height="80dp"
    android:layout_width="wrap_content"
    android:layout_margin="7dp"
    android:text=""/>
</GridLayout>

</androidx.constraintlayout.widget.ConstraintLayout>

```

### Java Code:

```

package com.example.calculator;

import androidx.appcompat.app.AppCompatActivity;


import android.os.Bundle;

public class MainActivity extends AppCompatActivity {

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
    }
}

```

### Output:

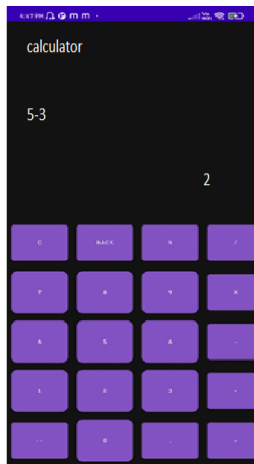

**Program no: 08****Aim:**

Program to create a Facebook page using RelativeLayout; set properties using .xml file

**XML Code:**

```
<?xml version="1.0" encoding="utf-8"?>

<RelativeLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:background="@color/blue"
    tools:context=".MainActivity">

    <TextView
        android:id="@+id/t1"
        android:layout_width="264dp"
        android:layout_height="40dp"
        android:layout_alignParentStart="true"
        android:layout_alignParentTop="true"
        android:textColor="@color/white"
        android:layout_alignParentEnd="true"
        android:layout_marginTop="50dp"
        android:text="FACEBOOK"
        android:textAlignment="center"
        android:textSize="40dp" />
```

```
<EditText
    android:id="@+id/ed1"
    android:layout_width="match_parent"
    android:layout_height="50dp"
    android:layout_below="@+id/t1"
    android:layout_alignParentStart="true"
    android:layout_alignParentEnd="true"
    android:layout_marginHorizontal="40dp"
    android:layout_marginTop="150dp"
    android:textColor="@color/white"
    android:textColorHint="@color/white"
    android:hint="Username"
    android:paddingStart="10px" />
```

```
<EditText
    android:id="@+id/ed2"
    android:layout_width="match_parent"
    android:layout_height="50dp"
    android:layout_below="@+id/ed1"
    android:layout_alignParentStart="true"
    android:layout_alignParentEnd="true"
    android:textColor="@color/white"
    android:textColorHint="@color/white"
    android:layout_marginHorizontal="40dp"
    android:layout_marginTop="50dp"
```

```
android:hint="Password"
```

```
android:paddingStart="10px" />
```

```
<Button
```

```
android:id="@+id/btn1"
```

```
android:layout_width="334dp"
```

```
android:layout_height="50dp"
```

```
android:layout_below="@+id/ed2"
```

```
android:layout_marginTop="31dp"
```

```
android:layout_alignParentStart="true"
```

```
android:layout_alignParentEnd="true"
```

```
android:background="@color/purple_700"
```

```
android:layout_marginHorizontal="400px"
```

```
android:text="SignIn"/>
```

```
<Button
```

```
android:id="@+id/btn2"
```

```
android:layout_width="match_parent"
```

```
android:layout_height="50dp"
```

```
android:layout_below="@+id/btn1"
```

```
android:layout_marginTop="100dp"
```

```
android:background="@color/green"
```

```
android:text="Dont have an account? Register here"
```

```
android:layout_marginHorizontal="20dp"/>
```

```
</RelativeLayout>
```


**Java Code:**

```
package com.example.facebook

import androidx.appcompat.app.AppCompatActivity;
import android.os.Bundle;

public class MainActivity extends AppCompatActivity {

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        getSupportActionBar().hide();
    }
}
```

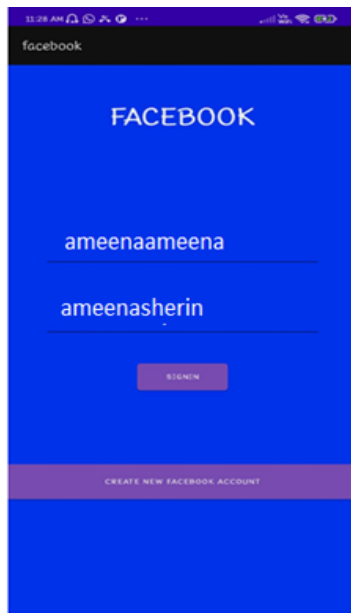**Output:**

**Program no: 09****Aim:**

Program to develop an application that toggles image using FrameLayout

**XML Code:**

```
<?xml version="1.0" encoding="utf-8"?>

<FrameLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:layout_gravity="center"
    android:background="@color/teal_700"
    tools:context=".MainActivity">

    <ImageView
        android:id="@+id/image2"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_gravity="center"
        android:src="@drawable/image2"
        android:visibility="gone"/>

    <ImageView
        android:id="@+id/image1"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
```



```

android:layout_gravity="center"

android:src="@drawable/image1"/>

</FrameLayout>

```

### **Java Code:**

```

package com.example.frame_layout;

import androidx.appcompat.app.AppCompatActivity;
import android.os.Bundle;
import android.view.View;
import android.widget.ImageView;

public class MainActivity extends AppCompatActivity implements View.OnClickListener {
    ImageView img1,img2;


    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);

        img1 =findViewById(R.id.image1);
        img2 =findViewById(R.id.image2);
        img1.setOnClickListener(this);
        img2.setOnClickListener(this);
    }

    public void onClick(View v)

```

```
{  
int id=v.getId();  
switch (id){  
case R.id.image1:  
img1.setVisibility(View.GONE);  
img2.setVisibility(View.VISIBLE);  
break;  
case R.id.image2:  
img1.setVisibility(View.VISIBLE);  
img2.setVisibility(View.GONE);  
break;  
}  
}
```

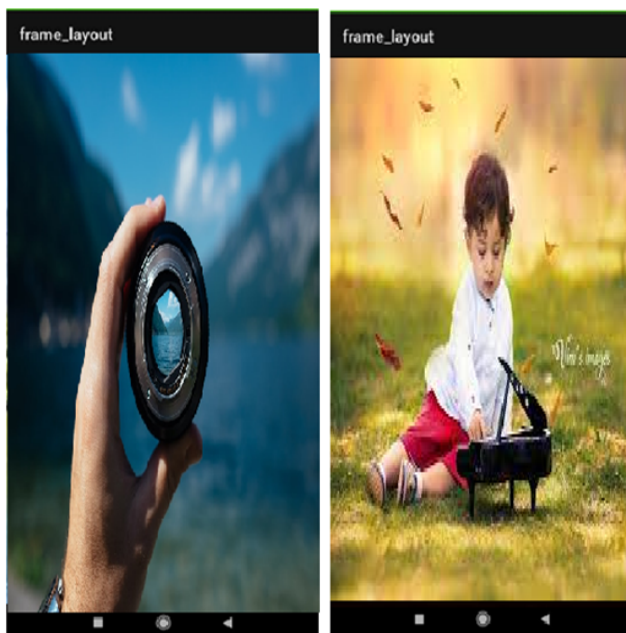**Output:**

**Program no: 10****Aim:**

Program to implement Adapters and perform exception handling .

**XML Code:**

```
<?xml version="1.0" encoding="utf-8"?>

<androidx.constraintlayout.widget.ConstraintLayout
xmlns:android="http://schemas.android.com/apk/res/android"

xmlns:app="http://schemas.android.com/apk/res-auto"

xmlns:tools="http://schemas.android.com/tools"

android:layout_width="match_parent"

android:layout_height="match_parent"

android:background="@color/purple_500"

tools:context=".MainActivity">

<TextView

android:id="@+id/txt1"

android:layout_width="match_parent"

android:padding="20dp"

android:textAlignment="center"

android:layout_marginHorizontal="10dp"

android:layout_height="wrap_content"

android:textSize="30sp"

app:layout_constraintStart_toStartOf="parent"

app:layout_constraintEnd_toEndOf="parent"

app:layout_constraintTop_toTopOf="parent"

android:layout_marginTop="100dp"
```

```
android:text="EXCEPTION" />
```

```
<EditText
```

```
android:id="@+id/edt1"
```

```
android:layout_width="match_parent"
```

```
android:layout_height="wrap_content"
```

```
android:padding="20dp"
```

```
android:layout_marginHorizontal="20dp"
```

```
android:hint="Enter first number"
```

```
app:layout_constraintStart_toStartOf="parent"
```

```
app:layout_constraintEnd_toEndOf="parent"
```

```
app:layout_constraintTop_toBottomOf="@+id/txt1"
```

```
android:layout_marginTop="100dp"/>
```

```
<EditText
```

```
android:id="@+id/edt2"
```

```
android:layout_width="match_parent"
```

```
android:layout_height="wrap_content"
```

```
android:padding="20dp"
```

```
android:hint="Enter second number"
```

```
android:layout_marginHorizontal="20dp"
```

```
app:layout_constraintStart_toStartOf="parent"
```

```
app:layout_constraintEnd_toEndOf="parent"
```

```
app:layout_constraintTop_toBottomOf="@+id/edt1"
```

```
android:layout_marginTop="10dp"/>
```

```
<Button
```

```

android:id="@+id/btn1"
android:layout_width="wrap_content"
android:layout_height="wrap_content"
android:text="Divide"
app:layout_constraintTop_toBottomOf="@+id/edt2"
android:layout_marginTop="30dp"
app:layout_constraintStart_toStartOf="parent"
app:layout_constraintEnd_toEndOf="parent"/>

<TextView
android:id="@+id/txt2"
android:layout_width="wrap_content"
android:layout_height="wrap_content"
android:layout_marginTop="20dp"
app:layout_constraintStart_toStartOf="parent"
app:layout_constraintEnd_toEndOf="parent"
app:layout_constraintTop_toBottomOf="@+id/btn1"/>

</androidx.constraintlayout.widget.ConstraintLayout>

```

### Java Code:

```

package com.example.exception;

import androidx.appcompat.app.AppCompatActivity;

import android.os.Bundle;

```

```
import android.view.View;

import android.widget.Button;

import android.widget.EditText;

import android.widget.TextView;


public class MainActivity extends AppCompatActivity {

    EditText e1, e2;

    Button b1;

    TextView t1;


    @Override

    protected void onCreate(Bundle savedInstanceState) {

        super.onCreate(savedInstanceState);

        setContentView(R.layout.activity_main);

        e1 = findViewById(R.id.edt1);

        e2 = findViewById(R.id.edt2);

        b1 = findViewById(R.id.btn1);

        t1 = findViewById(R.id.txt2);


        b1.setOnClickListener(new View.OnClickListener() {

            @Override

            public void onClick(View v) {

                String a, b;


                int c, d;

                a = e1.getText().toString();

                b = e2.getText().toString();
```

```
try{  
    int res = Integer.parseInt(a)/Integer.parseInt(b);  
    t1.setText(res);  
}catch(Exception e){  
    t1.setText(e.toString());  
}  
  
}  
  
});  
  
}  
  
}
```

### Output:

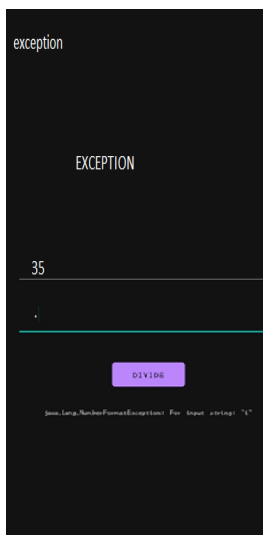

**Program no: 11****Aim:**

Program to implement Intent to navigate between multiple activities (Explicit Intent).

**XML Code:**

```
<?xml version="1.0" encoding="utf-8"?>

<androidx.constraintlayout.widget.ConstraintLayout
xmlns:android="http://schemas.android.com/apk/res/android"
xmlns:app="http://schemas.android.com/apk/res-auto"
xmlns:tools="http://schemas.android.com/tools"
android:layout_width="match_parent"
android:layout_height="match_parent"
android:background="#fba9dc"
tools:context=".MainActivity">

<Button
android:id="@+id/btn1"
android:layout_width="wrap_content"
android:layout_height="wrap_content"
app:layout_constraintEnd_toEndOf="parent"
app:layout_constraintStart_toStartOf="parent"
app:layout_constraintTop_toTopOf="parent"
```



```

app:layout_constraintBottom_toBottomOf="parent"
android:text="Button"
/>
</androidx.constraintlayout.widget.ConstraintLayout>

```

### Java Code:

```

package com.example.explicit;

import androidx.appcompat.app.AppCompatActivity;

import android.content.Intent;
import android.net.Uri;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;

public class MainActivity extends AppCompatActivity {
    Button b1;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        b1=findViewById(R.id.btn1);
        b1.setOnClickListener(new View.OnClickListener() {
            @Override


```

```

public void onClick(View v) {
    Intent b=new Intent(Intent.ACTION_VIEW, Uri.parse("https://www.google.com"));
    startActivity(b);
}
});
}
}

```

### Output:

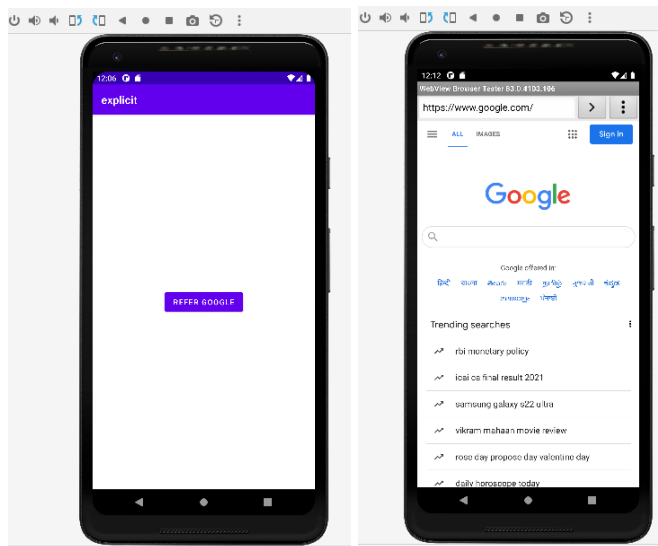

**Program no: 12****Aim:**

Program to develop an application that works with Implicit intents

**XML Code:**

#activity\_main1.xml

```
<?xml version="1.0" encoding="utf-8"?>

<androidx.constraintlayout.widget.ConstraintLayout
xmlns:android="http://schemas.android.com/apk/res/android"
xmlns:app="http://schemas.android.com/apk/res-auto"
xmlns:tools="http://schemas.android.com/tools"
android:layout_width="match_parent"
android:background="@color/teal_200"
android:layout_height="match_parent"
tools:context=".MainActivity">

<TextView
android:id="@+id/txt1"
android:layout_width="wrap_content"
android:layout_height="wrap_content"
android:text="Activity 1"
app:layout_constraintLeft_toLeftOf="parent"
android:layout_marginTop="50dp"
android:textSize="30sp"
app:layout_constraintRight_toRightOf="parent"
app:layout_constraintTop_toTopOf="parent" />
```

```

<Button
    android:id="@+id/btn1"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="SWITCH TO NEXT ACTIVITY"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintTop_toBottomOf="@id/txt1"
    app:layout_constraintBottom_toBottomOf="parent"/>

</androidx.constraintlayout.widget.ConstraintLayout>

```

#activity\_main2.xml

```

<?xml version="1.0" encoding="utf-8"?>

<androidx.constraintlayout.widget.ConstraintLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:background="@color/white"
    tools:context=".MainActivity2">

```

```

<TextView
    android:id="@+id/txt2"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:textSize="30sp"
    android:text="Activity 2"
    app:layout_constraintLeft_toLeftOf="parent"
    android:layout_marginTop="50dp"
    app:layout_constraintRight_toRightOf="parent"
    app:layout_constraintTop_toTopOf="parent" />

```

```

<Button
    android:id="@+id/btn2"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="GO TO PREVIOUS ACTIVITY"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintTop_toBottomOf="@id/txt2"
    app:layout_constraintBottom_toBottomOf="parent"/>

```

```

</androidx.constraintlayout.widget.ConstraintLayout>

```

### **Java Code:**

#### **#MainActivity1**

```

package com.example.intent;

```

```
import androidx.appcompat.app.AppCompatActivity;

import android.content.Intent;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;

public class MainActivity extends AppCompatActivity {
    Button b1;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);

        b1 = findViewById(R.id.btn1);
        b1.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View v) {
                Intent intent = new Intent(MainActivity.this, MainActivity2.class);
                startActivity(intent);
            }
        });
    }
}
```

```
#MainActivity2

package com.example.intent;

import androidx.appcompat.app.AppCompatActivity;

import android.content.Intent;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;

public class MainActivity2 extends AppCompatActivity {

    Button b1;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main2);


        b1 = findViewById(R.id.btn2);

        b1.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View v) {
                Intent intent = new Intent(MainActivity2.this, MainActivity.class);
                startActivity(intent);
            }
        });
    }
}
```

```
}  
});
```

```
}  
}
```

### Output:

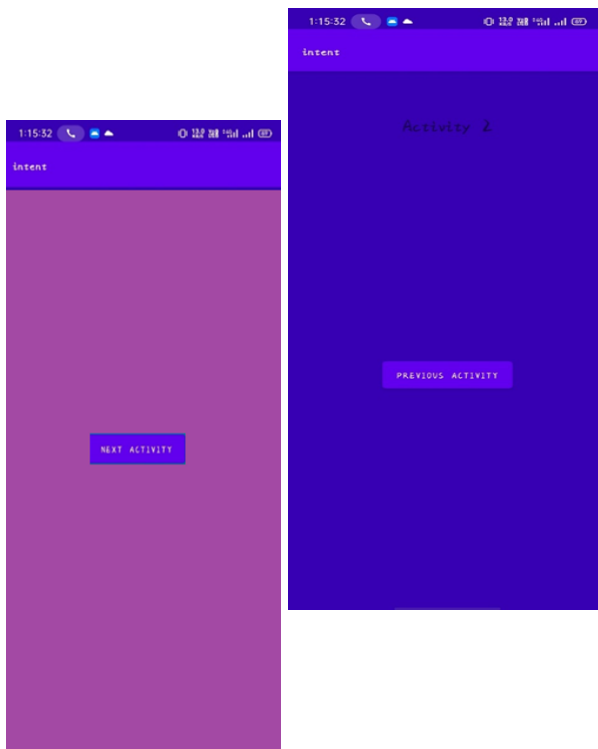



**Program no: 13****Aim:**

Program to implement Options Menu to navigate to activities.

**XML Code:**

```
#Activity_main_drawer
```

```
<?xml version="1.0" encoding="utf-8"?>
```

```
<menu xmlns:android="http://schemas.android.com/apk/res/android"
```

```
xmlns:tools="http://schemas.android.com/tools"
```

```
tools:showIn="navigation_view">
```

```
<group android:checkableBehavior="single">
```

```
<item
```

```
android:id="@+id/nav_home"
```

```
android:icon="@drawable/ic_menu_camera"
```

```
android:title="@string/menu_home" />
```

```
<item
```

```
android:id="@+id/nav_gallery"
```

```
android:icon="@drawable/ic_menu_gallery"
```

```
android:title="Account" />
```

```
<item
```

```
android:id="@+id/nav_slideshow"
```

```
android:icon="@drawable/ic_menu_slideshow"
```

```
android:title="Logout" />
```

```
</group>
```

```
</menu>
```

#main

```
<?xml version="1.0" encoding="utf-8"?>

<menu xmlns:android="http://schemas.android.com/apk/res/android"
xmlns:app="http://schemas.android.com/apk/res-auto">

<item

android:id="@+id/action_settings"

android:orderInCategory="100"

android:title="@string/action_settings"

app:showAsAction="never" />

</menu>
```

#activity\_main

```
<?xml version="1.0" encoding="utf-8"?>

<androidx.drawerlayout.widget.DrawerLayout
xmlns:android="http://schemas.android.com/apk/res/android"

xmlns:app="http://schemas.android.com/apk/res-auto"

xmlns:tools="http://schemas.android.com/tools"

android:id="@+id/drawer_layout"

android:layout_width="match_parent"

android:layout_height="match_parent"

android:fitsSystemWindows="true"

tools:openDrawer="start">

<include
```

```

android:id="@+id/app_bar_main"
layout="@layout/app_bar_main"
android:layout_width="match_parent"
android:layout_height="match_parent" />

<com.google.android.material.navigation.NavigationView
android:id="@+id/nav_view"
android:layout_width="wrap_content"
android:layout_height="match_parent"
android:layout_gravity="start"
android:fitsSystemWindows="true"
app:headerLayout="@layout/nav_header_main"
app:menu="@menu/activity_main_drawer" />
</androidx.drawerlayout.widget.DrawerLayout>

```

```
#activity_main2
```

```

<?xml version="1.0" encoding="utf-8"?>

<androidx.constraintlayout.widget.ConstraintLayout
xmlns:android="http://schemas.android.com/apk/res/android"
xmlns:app="http://schemas.android.com/apk/res-auto"
xmlns:tools="http://schemas.android.com/tools"
android:layout_width="match_parent"
android:layout_height="match_parent"
android:background="@color/teal_700"
tools:context=".MainActivity2">

```

```

<TextView
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    app:layout_constraintBottom_toBottomOf="parent"
    app:layout_constraintEnd_toEndOf="parent"
    android:text="Account Page"
    android:textSize="30sp"
    android:textAlignment="center"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toTopOf="parent" />

</androidx.constraintlayout.widget.ConstraintLayout>

```

### Java Code:

```

package com.example.nav;

import android.os.Bundle;
import android.view.View;
import android.view.Menu;

import com.google.android.material.snackbar.Snackbar;
import com.google.android.material.navigation.NavigationView;

import androidx.navigation.NavController;
import androidx.navigation.Navigation;

```

```

import androidx.navigation.ui.AppBarConfiguration;
import androidx.navigation.ui.NavigationUI;
import androidx.drawerlayout.widget.DrawerLayout;
import androidx.appcompat.app.AppCompatActivity;

import com.example.nav.databinding.ActivityMainBinding;

public class MainActivity extends AppCompatActivity {

    private AppBarConfiguration mAppBarConfiguration;
    private ActivityMainBinding binding;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);

        binding = ActivityMainBinding.inflate(getLayoutInflater());
        setContentView(binding.getRoot());

        setSupportActionBar(binding.appBarMain.toolbar);
        binding.appBarMain.fab.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View view) {
                Snackbar.make(view, "Replace with your own action", Snackbar.LENGTH_LONG)
                    .setAction("Action", null).show();
            }
        });
    }

```

```

});

DrawerLayout drawer = binding.drawerLayout;

NavigationView navigationView = binding.navView;

// Passing each menu ID as a set of Ids because each
// menu should be considered as top level destinations.

mAppBarConfiguration = new AppBarConfiguration.Builder(
    R.id.nav_home, R.id.nav_gallery, R.id.nav_slideshow)
    .setOpenableLayout(drawer)
    .build();

NavController navController = Navigation.findNavController(this,
    R.id.nav_host_fragment_content_main);

NavigationUI.setupActionBarWithNavController(this, navController,
    mAppBarConfiguration);

NavigationUI.setupWithNavController(navigationView, navController);
}

```

```

@Override

public boolean onCreateOptionsMenu(Menu menu) {

    // Inflate the menu; this adds items to the action bar if it is present.

    getMenuInflater().inflate(R.menu.main, menu);

    return true;

}

```

```

@Override

public boolean onSupportNavigateUp() {

    NavController navController = Navigation.findNavController(this,
    R.id.nav_host_fragment_content_main);

```

```
return NavigationUI.navigateUp(navController, mAppBarConfiguration)
|| super.onSupportNavigateUp();
}
}
```

#mainactivity2

```
package com.example.nav;
```

```
import androidx.appcompat.app.AppCompatActivity;
```

```
import android.os.Bundle;
```

```
public class MainActivity2 extends AppCompatActivity {
```

```
    @Override
```


```
    protected void onCreate(Bundle savedInstanceState) {
```

```
        super.onCreate(savedInstanceState);
```

```
        setContentView(R.layout.activity_main2);
```

```
    }
```

```
}
```

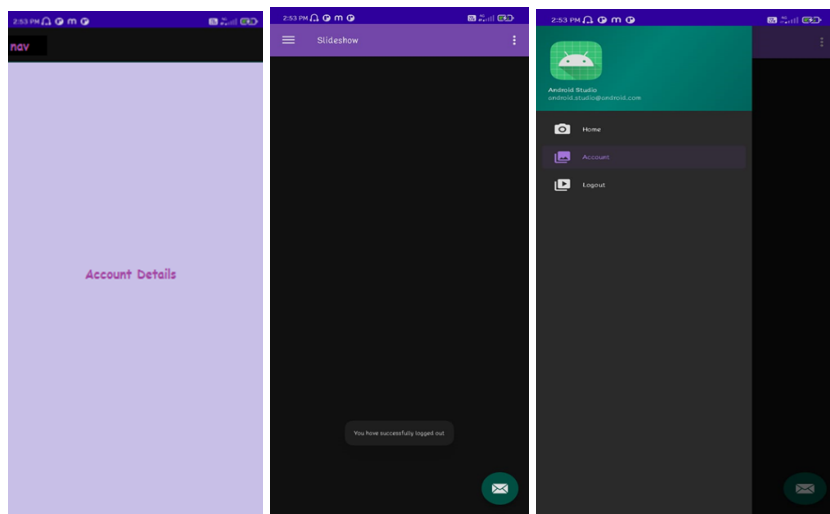**Output:**



**Program no: 14****Aim:**

Program to develop an application that uses ArrayAdapter with ListView

**XML Code:**

```
<?xml version="1.0" encoding="utf-8"?>

<LinearLayout

    xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:tools="http://schemas.android.com/tools"
    xmlns:app="http://schemas.android.com/apk/res-auto"

    android:layout_width="match_parent"
    "
    android:layout_height="match_paren
    t" tools:context=".arrayAdapter">

    <ListView

        android:id="@+id/mobile_list"
        android:layout_width="match_paren
        t"

        android:layout_height="wrap_content" >

    </ListView>
```

```
</LinearLayout>
```

### Java Code:

```
package com.example.ArrayAdapter;

import androidx.appcompat.app.AppCompatActivity;
import android.os.Bundle;
import
android.view.View;

import android.widget.AdapterView;
import
android.widget.ArrayAdapter;

import android.widget.ListView;
import android.widget.TextView;

import android.widget.Toast;

public class arrayAdapter extends AppCompatActivity
implements AdapterView.OnItemClickListener {

    ListView l;

    String[] days = {{"Sunday", "Monday", "Tuesday", "Wednesday", "Thursday", "Friday",
    "Saturday"}};

    @Override

    protected void onCreate(Bundle savedInstanceState) {

        super.onCreate(savedInstanceState);

        super.onCreate(savedInstanceState);

        setContentView(R.layout.activity_array_adapter);

        l = findViewById(R.id.mobile_list);
```

```
    ArrayAdapter<String> adapter = new ArrayAdapter<String>(this,
    R.layout.support_simple_spinner_dropdown_item, digits);

    l.setAdapter(adapter);

    l.setOnItemClickListener(this);

}

@Override

public void onItemClick(AdapterView<?> adapterView, View view, int i, long l) {


    TextView temp = (TextView) view;

    Toast.makeText(this, "You clicked " + temp.getText() + " at " + i,
    Toast.LENGTH_LONG).show();

}

}
```

**Output:**

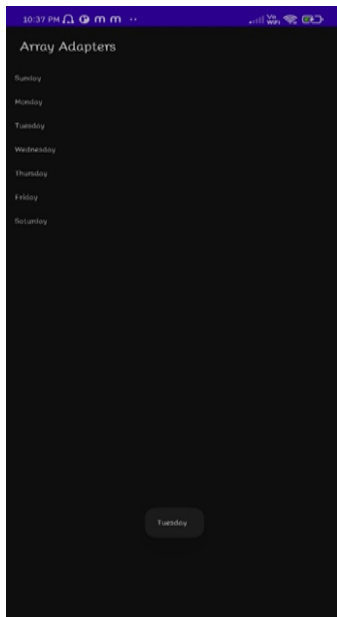

**Program no:15**

**Aim:** Program to develop an application that use GridView with images and display Alert box on selection

**XML Code:**

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout
xmlns:android="http://schemas.android.com/apk/res/android"
xmlns:tools="http://schemas.android.com/tools"
android:layout_width="match_parent"
android:layout_height="match_parent"
tools:context=".MainActivity">

<!-- android:numColumns=2 is the number of columns for Grid View
android:horizontalSpacing is the space between horizontal
grid items.-->
<GridView
android:id="@+id/idGVcourses"
android:layout_width="match_parent"
android:layout_height="match_parent"
android:horizontalSpacing="6dp"
android:numColumns="2"
android:verticalSpacing="6dp" />

</androidx.constraintlayout.widget.ConstraintLayout>
```

**Java Code:**

```
package com.example.myapp;

import androidx.annotation.NonNull;
```

```

import androidx.appcompat.app.AlertDialog;
import androidx.appcompat.app.AppCompatActivity;

import
android.content.DialogInterface;
import android.content.Intent;
import android.os.Bundle; import android.view.Menu;

import
android.view.MenuItem;
import android.view.View;
import
android.widget.Button;
import
android.widget.ImageView;
import android.widget.TextView;
import android.widget.Toast;

public class MainActivity3 extends AppCompatActivity
    ImageView i;
    AlertDialog.Builder builder;
    AlertDialog alertDialog;
    Button b;

    //option
    menu

    @Overri
    de

    public boolean onCreateOptionsMenu(Menu menu) {
        getMenuInflater().inflate(R.menu.menu,menu); return
        true;
        //return super.onCreateOptionsMenu(menu);
    }

```

```

@Override
public boolean onOptionsItemSelected(@NonNull MenuItem item) {

    item.setIcon(R.drawable.about);
    //i=findViewById(R.id.imageView);

    TextView t=findViewById(R.id.textView4);

    //handle item selection

    switch (item.getItemId()) {

        case R.id.it3:

            builder=new AlertDialog.Builder(MainActivity3.this);
            builder.setMessage("Do you want to
                close?").setTitle("AlertDialog").setPositiveButton("OK", new
                DialogInterface.OnClickListener() {
@Override
public void onClick(DialogInterface dialog, int which)

{

finish();
}

}).setNegativeButton("Cancel", new DialogInterface.OnClickListener()

{

@Override
public void onClick(DialogInterface dialog, int which) {
dialog.dismiss();
}

});

alertDialog=builder.create();
alertDialog.show();

return true;

```

```

case R.id.it4:
builder=new AlertDialog.Builder(MainActivity3.this);
View popupView=getLayoutInflater().inflate(R.layout.popup1,null);
builder.setView(popupView);
alertDialog=builder.create();
alertDialog.show();
return true;

default:
return super.onOptionsItemSelected(item);
}
}

```

```

@Override
protected void onCreate(Bundle savedInstanceState) {
super.onCreate(savedInstanceState);
setContentView(R.layout.activity_main3);
}
}

```

### **Popup.xml**

```

<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"

    android:layout_width="match_parent"

    android:layout_height="match_parent"
    ndroid:orientation="vertical">

<ImageView android:id="@+id/imageView2"

```



```

android:layout_width="wrap_content" a
ndroid:layout_height="wrap_content"
android:layout_weight="1"
    android:src="@drawable/help" />

    <TextView
        android:id="@+id/textView3"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_weight="1"
        android:text="help" />
</LinearLayout>

```

### **Menu.xml**

```

<?xml version="1.0" encoding="utf-8"?>
<menu xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:android="http://schemas.android.com/apk/res/android">
    <item
        android:id="@+id/it3"
        android:title="Alert" />
    <item
        android:id="@+id/it4"
        android:title="Pop Up" />
</menu>

```

**Output:**



**Program no:16**

**Aim:** Program to develop an application that implements Spinner component and perform event handling

**XML Code:**

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout xmlns:android="http://schemas.android.c
om/apk/res/android"
xmlns:app="http://schemas.android.com/apk/res-auto"
xmlns:tools="http://schemas.android.com/tools"
android:layout_width="match_parent"
android:layout_height="match_parent"
tools:context=".MainActivity">
<Spinner
android:id="@+id/spinner"
android:layout_width="197dp"
android:layout_height="70dp"
tools:layout_editor_absoluteX="92dp"
tools:layout_editor_absoluteY="297dp"
app:layout_constraintBottom_toBottomOf="parent"
app:layout_constraintEnd_toEndOf="parent"
app:layout_constraintHorizontal_bias="0.502"
app:layout_constraintStart_toStartOf="parent"
app:layout_constraintTop_toTopOf="parent"
app:layout_constraintVertical_bias="0.48"/>
</androidx.constraintlayout.widget.ConstraintLayout>
```

**Java Code:**

```
package com.example.spinner;
import androidx.appcompat.app.AppCompatActivity;
```

```

import android.os.Bundle;
import android.view.View;
import android.widget.AdapterView;
import android.widget.AdapterView.OnItemClickListener;
import android.widget.ArrayAdapter;
import android.widget.Spinner;
import android.widget.Toast;


public class MainActivity extends AppCompatActivity implements
    AdapterView.OnItemClickListener {
    String[] country = {"india","Iran","USA","other"};

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        Spinner spin =(Spinner) findViewById(R.id.spinner);
        spin.setOnItemClickListener(this);
        ArrayAdapter aa = new ArrayAdapter(this,android.R.layout.simple_spinner_item,country);
        aa.setDropDownViewResource(android.R.layout.simple_spinner_item);
        spin.setAdapter(aa);
    }

    @Override
    public void onItemClick(AdapterView<?> arg0, View arg1, int position, long id){
        Toast.makeText(getApplicationContext(),country[position],Toast.LENGTH_LONG).show();
    }

    @Override
    public void onNothingSelected(AdapterView<?>arg0){
    }
}

```

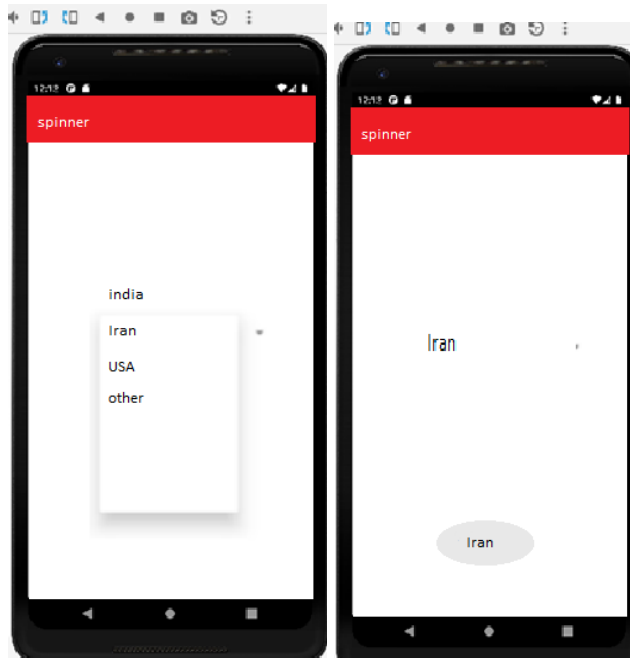**Output:**

**Program no:17**

**Aim:** Program to apply themes via code from manifest file.

**XML Code:**

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout
xmlns:android="http://schemas.android.com/apk/res/android"
xmlns:tools="http://schemas.android.com/tools"
xmlns:app="http://schemas.android.com/apk/res-auto"
android:layout_width="match_parent"
android:layout_height="match_parent"
tools:context=".MainActivity">

<EditText
android:id="@+id/editTextTextPersonName"
android:layout_width="wrap_content"
android:layout_height="wrap_content"
android:ems="10"
android:inputType="textPersonName"
android:minHeight="48dp"
android:text="avani"
app:layout_constraintBottom_toBottomOf="parent"
app:layout_constraintEnd_toEndOf="parent"
app:layout_constraintStart_toStartOf="parent"
app:layout_constraintTop_toTopOf="parent" />
</androidx.constraintlayout.widget.ConstraintLayout>
```

**Java Code:**

```

package com.example.themes;

import androidx.appcompat.app.AppCompatActivity;
import android.os.Bundle;

public class MainActivity extends AppCompatActivity {

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
    }
}

```

### #colors.xml

```

<?xml version="1.0" encoding="utf-8"?>

<resources>

<color name="colorPrimary">#006064</color>

<color name="color_primary_dark">#00838F</color>

<color name="color_accent">#B2DFDB</color>

<color name="color_text_color_primary">#03A9F4</color>

</resources>

```

### #new\_style.xml

```

<resources xmlns:tools="http://schemas.android.com/tools">

<!-- Base application theme. -->

<style name="Theme.new_style"
parent="Theme.MaterialComponents.DayNight.DarkActionBar">

<item name="colorPrimary">@color/colorPrimary</item>

<item name="colorPrimaryDark">@color/color_primary_dark</item>

<item name="colorAccent">@color/color_accent</item>

<item name="android:textColorPrimary">@color/color_text_color_primary</item>

<item name="android:textSize">40dp</item>

</style>

</resources>

```

**#values\themes.xml**

```

<resources xmlns:tools="http://schemas.android.com/tools">

<!-- Base application theme. -->

<style name="Theme.Themes"
parent="Theme.MaterialComponents.DayNight.DarkActionBar">
<item name="colorPrimary">@color/colorPrimary</item>
<item name="colorPrimaryDark">@color/color_primary_dark</item>
<item name="colorAccent">@color/color_accent</item>
<item name="android:textColorPrimary">@color/color_text_color_primary</item>
<item name="android:textSize">40dp</item>
</style>
</resources>

```

**#AndroidManifest.xml**

```

<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
package="com.example.themes" >
<application
android:allowBackup="true"
android:icon="@mipmap/ic_launcher"
android:label="@string/app_name"
android:roundIcon="@mipmap/ic_launcher_round"
android:supportsRtl="true"
android:theme="@style/Theme.new_style">
<activity
android:name=".MainActivity"
android:exported="true" >
<intent-filter>
<action android:name="android.intent.action.MAIN" />
<category android:name="android.intent.category.LAUNCHER" />
</intent-filter>

```



```

</activity>
</application>
</manifest>

```

### #night\themes.xml


```

<resources xmlns:tools="http://schemas.android.com/tools">
<!-- Base application theme. -->
<style name="Theme.Themes"
parent="Theme.MaterialComponents.DayNight.DarkActionBar">

<item name="colorPrimary">@color/colorPrimary</item>
<item name="colorPrimaryDark">@color/color_primary_dark</item>
<item name="colorAccent">@color/color_accent</item>
<item name="android:textColorPrimary">@color/color_text_color_primary</item>
<item name="android:textSize">40sp</item>
</style>
</resources>

```

### Output:

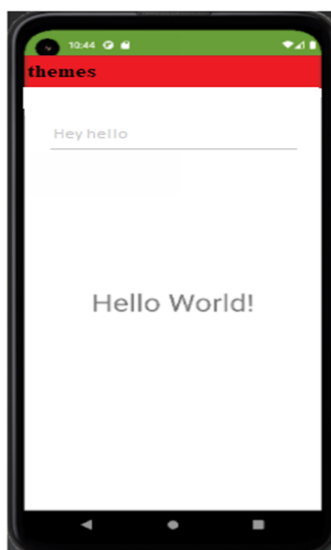

**Program no:18**

**Aim:** Program to develop application using Fragments

**XML Code:**

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent" android:layout_height="match_parent"
    android:orientation="vertical"
    tools:context=".MainActivity">

    <FrameLayout
        android:id="@+id/frameLayout"
        android:layout_width="match_parent"
        android:background="@color/teal_200"
        android:layout_height="0dp"
        android:layout_weight="4" />

    <RelativeLayout
        android:layout_width="match_parent"
        android:layout_height="0dp"
        android:layout_weight="1">

        <Button
            android:id="@+id/b1"
            android:layout_width="160dp"
            android:layout_height="50dp"
            android:layout_alignParentBottom="true"
            android:layout_marginStart="30dp"
            android:layout_marginBottom="30dp"
            android:text="Fragment 1" />
```

**Java Code:**

```

package com.example.myapplication09_02_3;

import androidx.appcompat.app.AppCompatActivity;
import androidx.fragment.app.Fragment;
import androidx.fragment.app.FragmentManager;
import androidx.fragment.app.FragmentTransaction;

import android.os.Bundle;
import android.view.View;
import
android.widget.Button;

public class MainActivity extends AppCompatActivity {
    Button b1,b2;
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);

        b1=findViewById(R.id.b1);
        b2=findViewById(R.id.b2);

        b1.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View v) {
                replaceFragmnt(new fragment1());
            }
        });

        b2.setOnClickListener(new View.OnClickListener() {

```

```

@Override
public void onClick(View v) {
    replaceFragmnt(new fragment2());

}

});

}

private void replaceFragmnt(Fragment fragment) {
    FragmentManager fragmentManager=getSupportFragmentManager();
    FragmentTransaction
    fragmentTransaction=fragmentManager.beginTransaction();
    fragmentTransaction.replace(R.id.frameLayout,fragment);
    fragmentTransaction.commit();
}

}

<Button
    android:id="@+id/b2"

    android:layout_width="160dp"
    android:layout_height="50dp"
    android:layout_alignParentBottom="true"
    android:layout_alignParentRight="true"
    android:layout_marginStart="30dp"
    android:layout_marginBottom="30dp"
    android:text="Fragment 2" />

</RelativeLayout>

</LinearLayout>
//create fragment from new>framents>fragment(blank)

```

### **fragment1.java**

```
package
```

```
com.example.myapp09_02_3; import
```

```
android.os.Bundle;
```

```
import androidx.fragment.app.Fragment;
```

```
import
```

```
android.view.LayoutInflater;
```

```
import android.view.View;
```

```
import android.view.ViewGroup;
```

```
public class fragment1 extends Fragment {
```

```
@Override
```

```
public View onCreateView(LayoutInflater inflater, ViewGroup container, Bundle
savedInstanceState) {
```

```
// Inflate the layout for this fragment
```

```
return inflater.inflate(R.layout.fragment_fragment1, container, false);
```

```
}
```

```
}
```

### **fragment2.java**

```
package com.example.myapp;
```

```
import android.os.Bundle;
```

```
import androidx.fragment.app.Fragment;
```

```

import
android.view.LayoutInflater;
import android.view.View;
import android.view.ViewGroup;

public class fragment2 extends Fragment {
    @Override
    public View onCreateView(LayoutInflater inflater, ViewGroup container, Bundle
savedInstanceState) {
        // Inflate the layout for this fragment

        return inflater.inflate(R.layout.fragment_fragment2, container, false);
    }
}

```

### **fragment\_fragment1.xml**

```


<?xml version="1.0" encoding="utf-8"?>
<RelativeLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:background="@color/purple_700"
    tools:context=".fragment1">

    <!-- TODO: Update blank fragment layout -->

    <TextView android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_centerInParent="true"
        android:textSize="30dp"
        android:text="Fragment 1" />

</RelativeLayout>

```

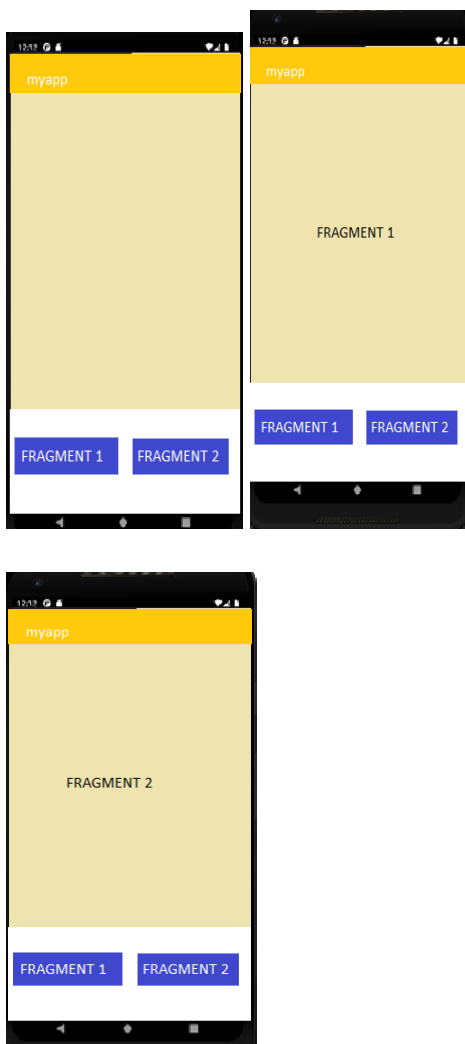**Output:**

**Program no:19**

**Aim:** Program to implement Navigation drawer.

**XML Code:**

```
<?xml version="1.0" encoding="utf-8"?>

<androidx.drawerlayout.widget.DrawerLayoutxmlns:android="http://schemas.android.com/a
pk/res/android"

xmlns:app="http://schemas.android.com/apk/res-auto"

xmlns:tools="http://schemas.android.com/tools"

android:layout_width="match_parent"

android:layout_height="match_parent"

tools:context=".MainActivity"

android:id="@+id/drawer">

<LinearLayout

android:layout_width="match_parent"

android:layout_height="match_parent">

<TextView

android:layout_width="wrap_content"

android:layout_height="wrap_content"

android:text="Hello World!"

app:layout_constraintBottom_toBottomOf="parent"

app:layout_constraintLeft_toLeftOf="parent"

app:layout_constraintRight_toRightOf="parent"

app:layout_constraintTop_toTopOf="parent" />

</LinearLayout>

<com.google.android.material.navigation.NavigationView

android:layout_width="match_parent"

android:layout_height="match_parent"

android:id="@+id/navigation_view"

app:menu="@menu/navigation_menu"

android:layout_gravity="start"/>
```



```
</androidx.drawerlayout.widget.DrawerLayout>
```

### Java Code:

```
package com.example.drawernavigation;

import androidx.annotation.NonNull;
import androidx.appcompat.app.ActionBarDrawerToggle;
import androidx.appcompat.app.AppCompatActivity;
import androidx.drawerlayout.widget.DrawerLayout;
import android.app.ActionBar;
import android.os.Bundle;
import android.view.MenuItem;
import android.widget.Toast;
import com.google.android.material.navigation.NavigationView;

public class MainActivity extends AppCompatActivity implements
NavigationView.OnNavigationItemSelectedListener {

    public DrawerLayout drawerLayout;
    public ActionBarDrawerToggle actionBarDrawerToggle;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        drawerLayout = findViewById(R.id.drawer);
        actionBarDrawerToggle = new ActionBarDrawerToggle(this, drawerLayout,
            R.string.nav_open, R.string.nav_close);
        drawerLayout.addDrawerListener(actionBarDrawerToggle);
        actionBarDrawerToggle.syncState();
        getSupportActionBar().setDisplayHomeAsUpEnabled(true);
        NavigationView navigationView = findViewById(R.id.navigation_view);
        navigationView.setNavigationItemSelectedListener(this);
    }

    @Override
```

```

public boolean onOptionsItemSelected(@NonNull MenuItem item) {
    if (actionBarDrawerToggle.onOptionsItemSelected(item)) {
        return true;
    }
    return super.onOptionsItemSelected(item);
}

@Override
public boolean onOptionsItemSelected(@NonNull MenuItem item) {
    int id = item.getItemId();
    if (id == R.id.nav_account) {
        Toast.makeText(this, "home", Toast.LENGTH_SHORT).show();
    }
    if (id == R.id.nav_settings) {
        Toast.makeText(this, "settings", Toast.LENGTH_SHORT).show();
    }
    if (id == R.id.nav_logout) {
        Toast.makeText(this, "logout", Toast.LENGTH_SHORT).show();
    }
    return false;
}
}

```

### **#navigation\_menu.xml**

```

<?xml version="1.0" encoding="utf-8"?>
<menu xmlns:android="http://schemas.android.com/apk/res/android">
    <item
        android:id="@+id/nav_account"
        android:title="MY Account"/>
    <item
        android:id="@+id/nav_settings"
        android:title="Settings"/>
    <item

```

```
android:id="@+id/nav_logout"
```

```
android:title="logout"/>
```

```
</menu>
```

### **#strings.xml**

```
<resources>
```

```
<string name="app_name">drawernavigation</string>
```

```
<string name="nav_open">Open</string>
```

```
<string name="nav_close">Close</string>
```

```
</resources>
```

### **#build.gradle(:app)**

```
plugins {
```

```
id 'com.android.application'
```

```
}
```

```
android {
```

```
compileSdk 31
```

```
defaultConfig {
```

```
applicationId "com.example.drawernavigation"
```

```
minSdk 21
```

```
targetSdk 31
```

```
versionCode 1
```

```
versionName "1.0"
```

```
testInstrumentationRunner "androidx.test.runner.AndroidJUnitRunner"
```

```
}
```

```
buildTypes {
```

```
release {
```

```
minifyEnabled false
```

```
proguardFiles getDefaultProguardFile('proguard-android-optimize.txt'), 'proguard-rules.pro'
```

```
}
```

```
}
```

```
compileOptions {
```


```
sourceCompatibility JavaVersion.VERSION_1_8
```

```

targetCompatibility JavaVersion.VERSION_1_8
}
}
dependencies {
implementation 'androidx.appcompat:appcompat:1.4.1'
implementation 'com.google.android.material:material:1.5.0'
implementation 'androidx.constraintlayout:constraintlayout:2.1.3'
implementation 'androidx.drawerlayout:drawerlayout:1.1.1'
testImplementation 'junit:junit:4.+''
androidTestImplementation 'androidx.test.ext:junit:1.1.3'
androidTestImplementation 'androidx.test.espresso:espresso-core:3.4.0'
implementation "com.google.android.material:material:1.4.1"
}

```

### Output:

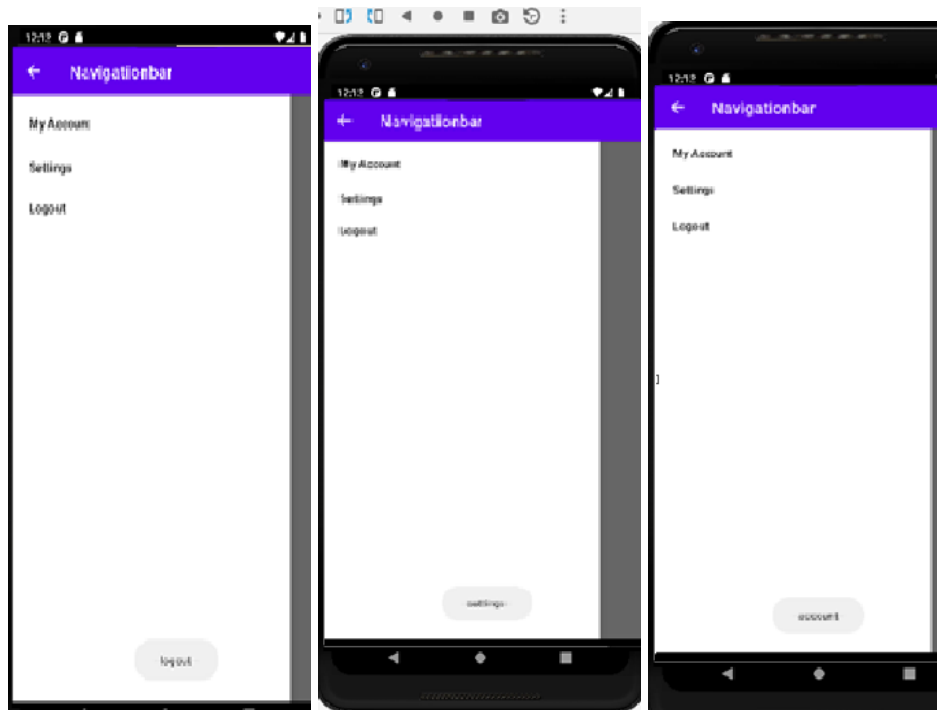

**Program no:21**

**Aim:**Program to implement various SQLite operations :

(INSERT, UPDATE ,DELETE ,SELECT)

**XML Code:**

```
<?xml version="1.0" encoding="utf-8"?>

<RelativeLayout
xmlns:android="http://schemas.android.com/apk/res/android"

    xmlns:app="http://schemas.android.com/apk/res-auto"

    xmlns:tools="http://schemas.android.com/tools"

    android:layout_width="match_parent"

    android:layout_height="match_parent"

    android:padding="10dp"

    tools:context=".MainActivity">

    <TextView

        android:id="@+id/texttitle"

        android:layout_width="wrap_content"

        android:layout_height="wrap_content"

        android:layout_marginTop="20dp"

        android:text="Please enter the details below"

        android:textSize="24dp" />

    <EditText

        android:id="@+id/name"

        android:layout_width="match_parent"

        android:layout_height="wrap_content"
```

```

        android:hint="Name"

        android:textSize="24dp"

        android:layout_below="@+id/textttitle"

        android:inputType="textPersonName"

    />

<EditText

    android:id="@+id/contact"

    android:layout_width="match_parent"

    android:layout_height="wrap_content"

    android:hint="Contact"

    android:textSize="24dp"

    android:layout_below="@+id/name"

    android:inputType="number"

/>

<EditText

    android:id="@+id/dob"

    android:layout_width="match_parent"

    android:layout_height="wrap_content"

    android:hint="Date of birth"

    android:textSize="24dp"

    android:layout_below="@+id/contact"

    android:inputType="number"

/>

<Button

    android:id="@+id/buttonInsert"

    android:layout_width="match_parent"

    android:layout_height="wrap_content"

    android:textSize="24dp"

```

```

        android:text="Insert new Data"

        android:layout_marginTop="30dp"

        android:layout_below="@+id/dob"

    />

<Button

    android:id="@+id/buttonUpdate"

    android:layout_width="match_parent"

    android:layout_height="wrap_content"

    android:textSize="24dp"

    android:text="Update Data"

    android:layout_below="@+id/buttonInsert"

/>

<Button

    android:id="@+id/buttondelete"

    android:layout_width="match_parent"

    android:layout_height="wrap_content"

    android:textSize="24dp"

    android:text="Delete existing data"

    android:layout_below="@+id/buttonUpdate"

/>

<Button

    android:id="@+id/buttonView"

    android:layout_width="match_parent"

    android:layout_height="wrap_content"

    android:textSize="24dp"

    android:text="View data"

    android:layout_below="@+id/buttondelete"

/>

```

</RelativeLayout>

#MainActivity.java

```
package com.example.sqlite_app;

import androidx.appcompat.app.AlertDialog;
import androidx.appcompat.app.AppCompatActivity;

import android.database.Cursor;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.Toast;

public class MainActivity extends AppCompatActivity {

    EditText name, contact, dob;

    Button insert, update, delete, view;

    DBHelper DB;

    @Override

    protected void onCreate(Bundle savedInstanceState) {

        super.onCreate(savedInstanceState);

        setContentView(R.layout.activity_main);

        name=findViewById(R.id.name);

        contact=findViewById(R.id.contact);

        dob=findViewById(R.id.dob);
```



```

insert=findViewById(R.id.buttonInsert);

update=findViewById(R.id.buttonUpdate);

delete=findViewById(R.id.buttondelete);

view=findViewById(R.id.buttonView);

DB=new DBHelper(this);

insert.setOnClickListener(new View.OnClickListener() {

    @Override

    public void onClick(View v) {

        String nameTXT=name.getText().toString();

        String contactTXT=contact.getText().toString();

        String dobTXT=dob.getText().toString();

        Boolean

checkinsertdata=DB.insertuserdata(nameTXT,contactTXT,dobTXT);

        if(checkinsertdata==true)

            Toast.makeText(MainActivity.this, "New Entry
Inserted", Toast.LENGTH_SHORT).show();

        else

            Toast.makeText(MainActivity.this, "unable to
insert", Toast.LENGTH_SHORT).show();

    }

});

update.setOnClickListener(new View.OnClickListener() {

    @Override

    public void onClick(View v) {

        String nameTXT=name.getText().toString();

        String contactTXT=contact.getText().toString();

        String dobTXT=dob.getText().toString();

```

```

        Boolean
        checkupdatedata=DB.updateuserdata (nameTXT,contactTXT,dobTXT) ;

        if (checkupdatedata==true)

            Toast.makeText (MainActivity.this, "Entry updated",
            Toast.LENGTH_SHORT) .show() ;

        else

            Toast.makeText (MainActivity.this, "Not updated",
            Toast.LENGTH_SHORT) .show() ;

    }

});

delete.setOnClickListener (new View.OnClickListener() {

    @Override

    public void onClick (View v) {

        String nameTXT=name.getText().toString() ;

        Boolean checkdeletedata=DB.deletedata (nameTXT) ;

        if (checkdeletedata==true)

            Toast.makeText (MainActivity.this, "Entry deleted",
            Toast.LENGTH_SHORT) .show() ;

        else

            Toast.makeText (MainActivity.this, "Not deleted",
            Toast.LENGTH_SHORT) .show() ;

    }

});

view.setOnClickListener (new View.OnClickListener() {

    @Override

    public void onClick (View v) {

        Cursor res=DB.getdata() ;

        if (res.getCount()==0) {

```

```

        Toast.makeText(MainActivity.this, "No entry
exists", Toast.LENGTH_SHORT).show();

        return;

    }

    StringBuffer buffer=new StringBuffer();

    while(res.moveToNext()){

        buffer.append("Name:"+res.getString(0)+"\n");

        buffer.append("Contact:"+res.getString(1)+"\n");

        buffer.append("Date of
Birth:"+res.getString(2)+"\n");

    }

    AlertDialog.Builder builder=new
AlertDialog.Builder(MainActivity.this);

    builder.setCancelable(true);

    builder.setTitle("User Entries");

    builder.setMessage(buffer.toString());

    builder.show();

}

});

}

}

```

### #DBHelper.java

```
package com.example.sqlite_app;
```

```

import android.content.ContentValues;

import android.content.Context;

import android.database.Cursor;

import android.database.sqlite.SQLiteDatabase;

import android.database.sqlite.SQLiteOpenHelper;


import androidx.annotation.Nullable;


public class DBHelper extends SQLiteOpenHelper {

    public DBHelper(Context context) {

        super(context, "Userdata", null, 1);

    }


    @Override

    public void onCreate(SQLiteDatabase DB) {

        DB.execSQL("create Table Userdetails(name TEXT primary key,
contact TEXT, dob TEXT)");

    }


    @Override

    public void onUpgrade(SQLiteDatabase DB, int oldVersion, int
newVersion) {

        DB.execSQL("drop Table if exists Userdetails");

    }


    public Boolean insertuserdata(String name, String contact, String
dob){

        SQLiteDatabase DB=this.getWritableDatabase();

        ContentValues contentValues=new ContentValues();

```

```

        contentValues.put("name",name);

        contentValues.put("contact",contact);

        contentValues.put("dob",dob);

        long result=DB.insert("Userdetails", null, contentValues);

        if(result==-1){

            return false;

        }else{

            return true;

        }

    }

    public Boolean updateuserdata(String name, String contact, String
dob){

        SQLiteDatabase DB=this.getWritableDatabase();

        ContentValues contentValues=new ContentValues();

        contentValues.put("contact",contact);

        contentValues.put("dob",dob);

        Cursor cursor=DB.rawQuery("Select * from Userdetails where
name=?", new String[]{name});

        if(cursor.getCount()>0) {

            long result = DB.update("Userdetails", contentValues,
"name=?", new String[]{name});

            if (result == -1) {

                return false;

            } else {

                return true;

            }

        }else{

            return false;

        }

    }

```

```

    }

    public Boolean deletedata(String name){

        SQLiteDatabase DB=this.getWritableDatabase();

        Cursor cursor=DB.rawQuery("Select * from Userdetails where
name=?", new String[]{name});

        if(cursor.getCount()>0) {

            long result = DB.delete("Userdetails", "name=?", new
String[]{name});

            if (result == -1) {

                return false;

            } else {

                return true;

            }

        }else{

            return false;

        }

    }

    public Cursor getdata (){

        SQLiteDatabase DB=this.getWritableDatabase();

        Cursor cursor=DB.rawQuery("Select * from Userdetails",null);

        return cursor;

    }

}

```

**Output:**

