

ToricGT: Graph-Token Reasoning with Tropical Ring Attention, Noncommutative Tori, Soft-MoE Routing, and Parameter-Golf Compression

Amelie Schreiber

June 1, 2026

Abstract

This manuscript extends the ToricGT framework into a more formal, didactic, and proof-heavy specification. ToricGT is a graph-to-graph architecture that combines TokenGT-style node and edge tokenization, exact ring evaluation of attention, tropical max-plus heads for dynamic-programming structure, finite noncommutative-torus channels for projective phase memory, and embedding-space Generative Flow Network fine-tuning. We formalize bounded typed graph domains, prove equivariance of tokenization, masking, attention, decoding, and projective toric transports, and reduce bounded graph-to-graph universality to sequence-to-sequence Transformer universality. We then give exact blockwise tropical ring-attention proofs, stability lemmas for active faces, and constructive simulations of Bellman-Ford-style semiring recurrences. Motivated by the toric geometry of ReLU neural networks, we add a toric-geometric layer of explanation: tropical heads induce Newton polytopes and normal fans, active faces become exposed faces of those polytopes, and kink/bend diagnostics are interpreted as discrete analogues of Cartier-divisor intersection numbers. The operator-algebra layer is sharpened by normal-form, cocycle, trace, finite Weyl-pair, and irrational-spiral projection theorems. A new Hebrew morphology section defines root-template graphs for biblical and classical Hebrew, including radical alignment, binyan/template structure, source-span graphs, paradigm graphs, and semiring alignment losses. We add a visualization contract for auditing reasoning capacity: equivariance orbits, tropical active faces, toric phase maps, Hebrew paradigm lattices, GFlowNet reward landscapes, and proof-dependency graphs. We integrate Soft-MoE routing as a typed, fully differentiable expert-slot layer for ToricGT graph tokens, prove its permutation equivariance, give low-rank and shared-expert variants for compact artifacts, and specify a Parameter-Golf-constrained micro-ToricGT language-model track with byte-accurate artifact accounting, BPB scoring, quantization-aware training, record-folder checklists, compliance risk controls, and a byte-scored TokenGT hybrid objective that trains graph structure on hidden reveal trajectories without replacing official byte BPB. We further formulate behavior-modification protocols that generalize Assistant-Axis activation capping to GraphCG-disentangled, toric-tropical corridor and alcove control over graph-of-thought trajectories, memory retrieval, and analogical transfer. Finally, we integrate PolarQuant-style random preconditioning and recursive polar-angle quantization as an optional long-context KV-cache layer for ToricGT ring attention, with perturbation bounds showing when quantized keys and values preserve tropical outputs and active argmax faces. This revision also adds two implementation-facing layers requested for the training program: Soft-MoE feed-forward replacement blocks adapted to graph tokens, and a Parameter-Golf compression track that turns ToricGT ideas into a self-contained micro language model satisfying the OpenAI Model Craft Challenge constraints. The result is a mathematically controlled specification for a small, reproducible model family aimed at graph-structured mathematical, algebraic, tropical, toric-geometric, Hebrew-morphological, behavior-steered, and parameter-constrained language-model reasoning.

Contents

1	Purpose and high-level architecture	5
2	Typed attributed graph domains	5
2.1	Graph objects	5
3	Tokenization as an equivariant construction	7
3.1	Token maps	7
3.2	Attention and block equivariance	8
4	Universal graph-to-graph approximation	9
5	Tropical ring attention and semiring reasoning	10
5.1	Max-plus heads with provenance	10
5.2	Dynamic-programming gates	12
6	Toric geometry of neural-network charts	13
6.1	Minimal toric dictionary	13
6.2	ReLU fans, Cartier data, and ToricGT diagnostics	15
6.3	Moment features and compact toric regularization	16
6.4	Toric auxiliary losses for training	17
7	Rotation algebras, noncommutative tori, and spiral projections	18
7.1	Finite Weyl pairs and normal forms	18
7.2	Higher noncommutative tori	19
7.3	Infinite spiral projection	19
7.4	Trace supervision	20
8	Hebrew roots as graph-structured morphology	21
8.1	Why Hebrew morphology belongs in ToricGT	21
8.2	Graph construction algorithm	22
8.3	Hebrew morphology losses	23
8.4	Tropical alignment for root extraction	24
8.5	Hebrew graph tasks	24
9	Reasoning capacity and visualization contract	24
10	Embedding-space GFlowNet fine-tuning	25
11	Anticipative reasoning-trajectory memory	27
12	Interleaving PolarQuant with ToricGT ring attention	28
12.1	Applicability	28
12.2	Recursive polar transform	28
12.3	Polar ring cache	29
12.4	Memory accounting	31

13 Soft-MoE ToricGT blocks	31
13.1 Motivation and placement	31
13.2 Equations	31
13.3 Typed expert bank for ToricGT	33
13.4 Implementation details	34
13.5 Prefix-causal Soft-MoE for language-model scoring	34
13.6 Soft-MoE regularizers and diagnostics	36
14 Parameter-Golf constrained ToricGT	36
14.1 Contest constraints as engineering axioms	36
14.2 Prequential BPB validity	38
14.3 Random-order graph autoregressive projection	38
14.4 Byte-scored TokenGT hybrid graph loss	39
14.5 Byte-safe embedding-space GFlowNet actions	39
14.6 Relative Kolmogorov diagnostics and analogical helper transfer	40
14.7 GraphCG bases and directed topological analogies	41
14.8 Behavior modification protocols as toric-tropical corridor control	46
14.9 DEC conservative reasoning flow	48
14.10 Micro-ToricGT language-model design	52
14.11 Soft-MoE under a 16 MB artifact cap	53
14.12 Distillation from ToricGT to the contest LM	54
14.13 Artifact packing and runtime implementation	54
14.14 Contest record folder checklist	54
14.15 Pragmatic risk controls	55
14.16 Current oai implementation and recovery snapshot	55
15 Datasets, synthetic families, and leakage control	57
15.1 Training mixture	57
15.2 Normalized record schema	58
15.3 Graph conversion policy	58
15.4 Leakage-resistant splitting	59
15.5 Output layout and commands	59
15.6 Expected scale and license handling	60
15.7 Synthetic generator specifications	61
16 Model, losses, and training schedule	61
16.1 Architecture	61
16.2 Composite objective	61
16.3 Schedule	62
17 Evaluation and ablations	62
18 Implementation blueprint	63
19 Discussion and limits	64

20 A Look Ahead	64
20.1 Checkpoint audit before retraining	64
20.2 Toric data curriculum	65
20.3 Affine toric charts and Koszul persistence modules	65
20.4 Finite combinatorial algebra bridge	66
20.5 Skeptic gate and ablation discipline	68
20.6 Affine Coxeter, braid, and toric phase foliations	69
20.7 Slepian concentration on toric leaves	70
20.8 Fine-tuning objective	71
20.9 Continuous GFlowNets on toric charts	71
20.10 Retraining protocol	72
21 Conclusion	72
A Additional proof details	72
A.1 Hybrid universal approximation	72
A.2 Softmax perturbation with quantized keys	73
B Graph record schema	73
C Recommended hyperparameters	73

1 Purpose and high-level architecture

The original ToricGT proposal joined four pieces: graph-tokenized Transformers, ring attention, tropical max-plus reasoning, and finite noncommutative-torus features. This version makes the claims precise. The paper deliberately separates three levels of assertion.

First, there are exact statements about finite graph-token computations: permutation equivariance, ring-schedule exactness, projective phase consistency, and stability of max-plus argmax faces. These can be proved without empirical assumptions. Second, there are compact-domain approximation statements. These are universal-approximation results over bounded graph families, not claims about all finite graphs of arbitrary size. Third, there are experimental design claims: if one trains on finite shadows of rotation algebras, braid groups, Coxeter groups, Hebrew morphological paradigms, and tropical graph algorithms, the correct evaluations are held-out families and graph-similarity-controlled splits, not random example-level splits.

Model family. A ToricGT instance consists of

$$\text{ToricGT} = D \circ \Phi_L \circ \cdots \circ \Phi_1 \circ T, \quad (1.1)$$

where T is a graph-tokenizer, each Φ_ℓ is a token-permutation-equivariant Transformer block with softmax, tropical, or hybrid attention, and D is a shared node/edge/graph decoder. Optional side modules supply toric phase transports, a GFlowNet policy head, and a PolarQuant cache for long-context inference.

Core design invariants. The model is engineered around five invariants.

1. *Graph-to-graph equivariance*: relabeling a graph relabels node and edge outputs in the same way.
2. *Exact schedule/function separation*: ring attention changes the evaluation schedule, not the attention function being evaluated.
3. *Semiring visibility*: tropical heads expose active maximizers and margins, so dynamic-programming decisions can be visualized and tested.
4. *Projective algebraic memory*: toric phase channels encode twisted commutation and cocycles without pretending that a finite neural network faithfully represents an infinite C^* -algebra.
5. *Auditable reasoning*: every run emits diagnostics that make equivariance, active faces, phase consistency, root-template alignments, and GFlowNet diversity inspectable.


2 Typed attributed graph domains

2.1 Graph objects

Definition 2.1 (Typed attributed directed multigraph). A typed attributed graph is a tuple

$$G = (V, E, s, t, \tau_V, \tau_E, x, e, m_V, m_E), \quad (2.1)$$

where $V = \{1, \dots, n\}$ is a finite vertex set, $E = \{1, \dots, m\}$ is a finite edge-token set, $s, t : E \rightarrow V$ are source and target maps, $\tau_V : V \rightarrow \mathcal{T}_V$ and $\tau_E : E \rightarrow \mathcal{T}_E$ are finite type maps, $x_i \in \mathbb{R}^{d_v}$ and $e_a \in \mathbb{R}^{d_e}$ are bounded real attributes, and m_V, m_E are masks when the graph is embedded into a padded domain.

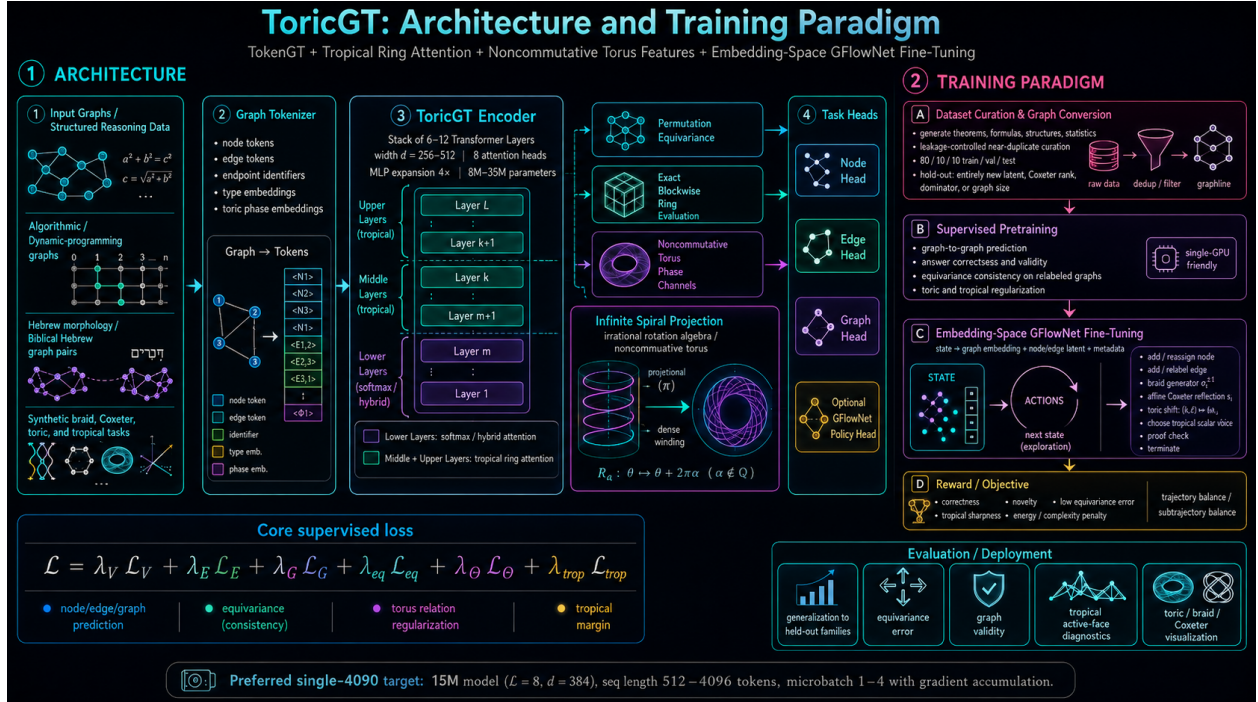

The edge set is treated as a set of edge tokens rather than as raw file-order rows. This matters: file order is rarely a graph invariant. For a node relabeling $\pi \in S_n$, an edge a with endpoints $(s(a), t(a))$ is transformed to an edge with endpoints $(\pi s(a), \pi t(a))$. If edge tokens are stored by a canonical endpoint order, this induces an edge permutation ρ_π ; if edge tokens are stored unordered, ρ_π is any consistent action on the edge-token set.

Definition 2.2 (Padded bounded graph cell). Fix $N_{\max}$ and $M_{\max}$. A padded graph cell $\mathcal{G}_{n,m,I,\tau}$ consists of graphs with exactly $n \leq N_{\max}$ valid nodes, $m \leq M_{\max}$ valid edges, fixed endpoint pattern $I \in \{1, \dots, n\}^{m \times 2}$, fixed node and edge type pattern τ , and attributes in compact sets $K_V \subset \mathbb{R}^{d_v}$ and $K_E \subset \mathbb{R}^{d_e}$. The full bounded domain is the finite union

$$\mathcal{G}_{\leq N, \leq M} = \bigcup_{n \leq N, m \leq M, I, \tau} \mathcal{G}_{n,m,I,\tau}. \quad (2.2)$$

Lemma 2.3 (Compactness of cells). *Every graph cell $\mathcal{G}_{n,m,I,\tau}$ is compact. The bounded padded graph space $\mathcal{G}_{\leq N, \leq M}$ is a finite union of compact cells and is therefore compact when equipped with the disjoint-union topology or with a mask topology that separates cells.*

Proof. Fix n, m, I, τ . The only continuous degrees of freedom are node attributes $X \in K_V^n$ and edge attributes $E \in K_E^m$. Finite products of compact sets are compact by Tychonoff's theorem in the finite case, equivalently by Heine-Borel when the sets are closed and bounded subsets of Euclidean space. Endpoint and type data are fixed discrete parameters in the cell. Hence $\mathcal{G}_{n,m,I,\tau} \simeq K_V^n \times K_E^m$ is compact. There are finitely many masks, endpoint patterns, and type patterns under fixed N and M , so the union is finite. A finite union of compact sets is compact. $\square$

Lemma 2.4 (Induced edge permutations form an action). *Suppose edge canonicalization is label-compatible: for all $\pi, \sigma \in S_n$, canonicalizing after σ and then after π is the same as canonicalizing after $\pi\sigma$. Then $\rho_{\pi\sigma} = \rho_\pi \rho_\sigma$ and $\rho_{\text{id}} = \text{id}$.*

Proof. Let a be an edge token with endpoints (u, v) . Applying σ sends the endpoints to $(\sigma u, \sigma v)$ and moves the token to position $\rho_\sigma(a)$. Applying π next sends endpoints to $(\pi\sigma u, \pi\sigma v)$ and token position to $\rho_\pi(\rho_\sigma(a))$. Direct application of $\pi\sigma$ gives the same endpoint pair. By label-compatible canonicalization the same edge-token position is assigned, so $\rho_{\pi\sigma}(a) = \rho_\pi \rho_\sigma(a)$ for every a . The identity relabeling leaves endpoints and canonical order unchanged. $\square$

Definition 2.5 (Graph-to-graph equivariance). Let $P_\pi = \pi \oplus \rho_\pi$ be the induced token permutation on node and edge outputs. A graph-to-graph map $F : \mathcal{G} \rightarrow \mathcal{Y}_V^n \times \mathcal{Y}_E^m \times \mathcal{Y}_G$ is equivariant if

$$F(\pi \cdot G) = (P_\pi F_{V,E}(G), F_G(G)) \quad (2.3)$$

for every admissible relabeling π . Its graph-level component is invariant when $F_G(\pi \cdot G) = F_G(G)$.

3 Tokenization as an equivariant construction

3.1 Token maps

A graph tokenizer maps typed attributed graphs to token matrices. Node and edge tokens have distinct type channels, endpoint channels, structural identifiers, and optional toric phase channels. For a node i and an edge token $a = (u, v)$,

$$t_i^V = \phi_V(x_i, \tau_V(i)) + \eta_i + \kappa_i + \theta_i, \quad (3.1)$$

$$t_a^E = \phi_E(e_a, \tau_E(a)) + \psi(\eta_u, \eta_v) + \zeta_a + \kappa_a + \theta_a. \quad (3.2)$$

Here η_i is an equivariant node identifier, ζ_a is an edge identifier, κ denotes optional structural features such as degree or Laplacian information, and θ denotes optional toric phase features. The maps ϕ_V, ϕ_E, ψ are shared across all nodes and edges.

Assumption 3.1 (Equivariant identifiers). The identifier fields obey

$$\eta_i(\pi G) = \eta_{\pi^{-1}i}(G), \quad \zeta_a(\pi G) = \zeta_{\rho_\pi^{-1}a}(G), \quad (3.3)$$

and structural/phase channels obey the analogous transformation law.

Lemma 3.2 (Tokenization equivariance). *Under equivariant identifiers and shared endpoint maps,*

$$T(\pi \cdot G) = P_\pi T(G). \quad (3.4)$$

Proof. For a node token,

$$\begin{aligned} t_i^V(\pi G) &= \phi_V(x_{\pi^{-1}i}, \tau_V(\pi^{-1}i)) + \eta_{\pi^{-1}i} + \kappa_{\pi^{-1}i} + \theta_{\pi^{-1}i} \\ &= (P_\pi T(G))_i. \end{aligned} \quad (3.5)$$

For an edge token a in the relabeled graph, its preimage under ρ_π is $\rho_\pi^{-1}a$. Its source and target identifiers are the permuted identifiers of the original endpoints. Since ϕ_E and ψ are shared, the edge token after relabeling equals the edge token at $\rho_\pi^{-1}a$ before relabeling. Concatenating node and edge rows gives $P_\pi T(G)$. $\square$

Lemma 3.3 (Mask equivariance). *Let $M(G) \in \{0, -\infty\}^{L \times L}$ be an additive attention mask whose entries depend only on token validity, token types, and graph incidence relations. Then*

$$M(\pi G) = P_\pi M(G) P_\pi^\top. \quad (3.7)$$

Proof. Validity masks permute with valid token rows. Type masks are preserved because node tokens map to node tokens and edge tokens map to edge tokens. Incidence masks are preserved because a is incident to i exactly when $\rho_\pi a$ is incident to πi . Thus every masked or unmasked pair is carried to its relabeled pair, which is exactly conjugation by P_π . $\square$

3.2 Attention and block equivariance

For token matrix $Z \in \mathbb{R}^{L \times d}$, define

$$Q = ZW_Q, \text{quad}K = ZW_K, \quad V = ZW_V, \quad S = QK^\top / \sqrt{d_h}. \quad (3.8)$$

A softmax head computes $\text{softmax}(S + M)V$. A max-plus tropical head computes

$$Y_{ic} = \max_j \{S_{ij} + M_{ij} + V_{jc}\}. \quad (3.9)$$

Lemma 3.4 (Softmax and tropical attention are token equivariant). *For any token permutation matrix P and mask satisfying $M(PZ) = PM(Z)P^\top$,*

$$\text{Attn}(PZ) = P \text{Attn}(Z) \quad (3.10)$$

for softmax attention and for tropical attention.

Proof. Linear projections commute with row permutations: $Q(PZ) = PQ(Z)$ and similarly for K, V . Hence the score matrix becomes

$$S(PZ) = PQK^\top P^\top / \sqrt{d_h} = PS(Z)P^\top. \quad (3.11)$$

For softmax, row-wise exponentiation and normalization are invariant under simultaneous row and column reindexing:

$$\text{softmax}(PSP^\top + PMP^\top) = P \text{softmax}(S + M)P^\top. \quad (3.12)$$

Multiplication by PV then yields $P \text{softmax}(S + M)V$. For tropical attention, fix output row i and coordinate c . If p is the permutation represented by P , then

$$Y'_{ic} = \max_j \{(PSP^\top + PMP^\top)_{ij} + (PV)_{jc}\} \quad (3.13)$$

$$= \max_j \{S_{p^{-1}i, p^{-1}j} + M_{p^{-1}i, p^{-1}j} + V_{p^{-1}j, c}\} \quad (3.14)$$

$$= \max_{j'} \{S_{p^{-1}i, j'} + M_{p^{-1}i, j'} + V_{j'c}\} = Y_{p^{-1}i, c}. \quad (3.15)$$

Thus $Y' = PY$. $\square$

Lemma 3.5 (Row-wise sublayers are equivariant). *Shared feed-forward networks, residual connections, dropout with shared distribution over rows, and layer normalization applied row-wise commute with token permutations.*

Proof. A shared feed-forward network f acts as $(f(Z_1), \dots, f(Z_L))$. Permuting rows before or after applying the same f gives the same sequence of rows. Residual addition is row-wise vector addition. Layer normalization uses statistics within a row, not across row labels. Dropout is exactly equivariant when the dropout mask is permuted with rows, and distributionally equivariant when masks are independently sampled from the same row-wise distribution. $\square$

Theorem 3.6 (TokenGT stack equivariance). *A ToricGT encoder built from equivariant tokenization, equivariant masks, shared attention projections, shared row-wise feed-forward layers, residuals, layer normalization, and shared node/edge decoders is graph-to-graph equivariant.*

Proof. Tokenization maps G to Z and πG to $P_\pi Z$. Each encoder block maps $P_\pi Z$ to $P_\pi \Phi(Z)$ by the previous two lemmas. A composition of equivariant maps is equivariant by induction on layers. Shared node decoders apply the same map to every node-token row, and shared edge decoders apply the same map to every edge-token row. Therefore decoding also commutes with P_π . Graph-level pooling by sum, mean, log-sum-exp, max, or attention with a permutation-invariant query is invariant because it is a symmetric function of token rows. $\square$

4 Universal graph-to-graph approximation

Assumption 4.1 (Token separability). For each fixed graph cell $\mathcal{G}_{n,m,I,\tau}$, the tokenizer T is continuous and injective. Since the domain is compact and the codomain is Hausdorff, T is a homeomorphism from $\mathcal{G}_{n,m,I,\tau}$ onto $T(\mathcal{G}_{n,m,I,\tau})$.

Theorem 4.2 (Fixed-cell graph-to-graph universality). *Let $F : \mathcal{G}_{n,m,I,\tau} \rightarrow \mathbb{R}^{(n+m) \times d_o}$ be continuous and equivariant under all relabelings preserving the cell. Under token separability, for every $\varepsilon > 0$ there exists a TokenGT-style Transformer Φ without absolute position embeddings such that*

$$\sup_{G \in \mathcal{G}_{n,m,I,\tau}} \|\Phi(T(G)) - F(G)\| < \varepsilon, \quad (4.1)$$

and Φ is token-permutation equivariant.

Proof. Let $K_T = T(\mathcal{G}_{n,m,I,\tau})$. The set K_T is compact because T is continuous and the graph cell is compact. Since T is a homeomorphism onto K_T , the conjugate map

$$\tilde{F} = F \circ T^{-1} : K_T \rightarrow \mathbb{R}^{(n+m) \times d_o} \quad (4.2)$$

is continuous. Equivariance of F and T gives, for every admissible P_π ,

$$\tilde{F}(P_\pi Z) = F(T^{-1}(P_\pi Z)) = F(\pi T^{-1}(Z)) = P_\pi F(T^{-1}(Z)) = P_\pi \tilde{F}(Z). \quad (4.3)$$

Yun et al.’s sequence-to-sequence Transformer universality theorem gives an equivariant Transformer approximating any continuous equivariant map on a compact token domain. Apply that theorem to $\tilde{F}$ on K_T . The approximation inequality follows after composing with T . $\square$

Corollary 4.3 (Bounded variable-size universality). *Let $\mathcal{G}_{\leq N, \leq M}$ be a finite union of graph cells. If F is continuous on each cell, equivariant, and compatible with padding masks, then a masked TokenGT model uniformly approximates F on the bounded padded domain.*

Proof. Apply the fixed-cell theorem to every cell. There are finitely many cells. The model can read mask and type indicators; shared feed-forward layers can approximate a continuous partition-of-unity-like selector over this finite discrete partition. Since the maximum of finitely many approximation errors can be made below ε , a single masked model approximates all cells. Mask equivariance preserves the group action. $\square$

Remark 4.4 (Scope). The theorem is not a claim that one finite model uniformly solves all graph sizes, all denominators q , all braid lengths, all Hebrew lexemes, or the entire irrational rotation algebra. It is a compact-domain theorem. Infinite objects enter the experimental program through finite presentations, finite approximants, finite graphs, and curriculum generalization tests.

5 Tropical ring attention and semiring reasoning

5.1 Max-plus heads with provenance

Let $\mathbb{T}_{\max} = \mathbb{R} \cup \{-\infty\}$ with $a \oplus b = \max(a, b)$ and $a \otimes b = a + b$. A tropical attention head computes

$$Y_{ic} = \bigoplus_{j=1}^L S_{ij} \otimes V_{jc} = \max_j (S_{ij} + V_{jc}). \quad (5.1)$$

Its provenance set is

$$A_{ic} = \arg \max_j (S_{ij} + V_{jc}). \quad (5.2)$$

When A_{ic} is a singleton, the output is locally affine. The top-two tropical margin is

$$\Delta_{ic} = z_{ic}^{(1)} - z_{ic}^{(2)}, \quad z_{icj} = S_{ij} + V_{jc}, \quad (5.3)$$

where $z^{(1)}$ and $z^{(2)}$ are the largest and second-largest candidate values.

Theorem 5.1 (Exact blockwise tropical ring attention). *Partition the key-value indices into blocks $B_1, \dots, B_R$. Let*

$$\hat{Y}_{ic}^{(r)} = \max_{j \in B_r} (S_{ij} + V_{jc}), \quad \hat{Y}_{ic} = \max_r \hat{Y}_{ic}^{(r)}. \quad (5.4)$$

Then $\hat{Y}_{ic} = Y_{ic}$ for every query i and coordinate c , independent of block order.

Proof. The blocks form a partition of $\{1, \dots, L\}$. Thus

$$Y_{ic} = \max_{j \in \cup_r B_r} (S_{ij} + V_{jc}) \quad (5.5)$$

$$= \max \left(\max_{j \in B_1} (S_{ij} + V_{jc}), \dots, \max_{j \in B_R} (S_{ij} + V_{jc}) \right) \quad (5.6)$$

$$= \max_r \hat{Y}_{ic}^{(r)}. \quad (5.7)$$

The binary maximum is associative and commutative, so the order in which blocks arrive around the ring cannot change the exact real-arithmetic result. Floating-point implementations differ only by standard numerical roundoff and tie-breaking behavior. $\square$

Corollary 5.2 (Exact provenance under ring evaluation). *If each block returns both its block maximum and the local argmax set, then a second maximum over block maxima returns the same global provenance set A_{ic} as full tropical attention.*

Proof. Let $m_r = \max_{j \in B_r} z_j$ and $m = \max_r m_r$. A candidate j is globally active exactly when $z_j = m$. This holds exactly when j is locally active in a block B_r whose block value $m_r = m$. Taking the union of local argmax sets over globally maximal blocks gives precisely the global argmax set. $\square$

Lemma 5.3 (Lipschitz stability of tropical attention). *Let S, V and $\hat{S}, \hat{V}$ satisfy*

$$\|S - \hat{S}\|_\infty \leq \epsilon_S, \quad \|V - \hat{V}\|_\infty \leq \epsilon_V. \quad (5.8)$$

Then the tropical outputs satisfy

$$\|Y - \hat{Y}\|_\infty \leq \epsilon_S + \epsilon_V. \quad (5.9)$$

If the original margin $\Delta_{ic} > 2(\epsilon_S + \epsilon_V)$, then the active argmax index for (i, c) is unchanged under perturbation.

Proof. For every candidate j ,

$$\left| (S_{ij} + V_{jc}) - (\hat{S}_{ij} + \hat{V}_{jc}) \right| \leq \epsilon_S + \epsilon_V. \quad (5.10)$$

The maximum function is 1-Lipschitz in ℓ_∞ :

$$\left| \max_j a_j - \max_j b_j \right| \leq \max_j |a_j - b_j|. \quad (5.11)$$

This proves the output bound. For argmax stability, let j^* be the unique original maximizer and let $j \neq j^*$. After perturbation,

$$\hat{z}_{j^*} - \hat{z}_j \geq (z_{j^*} - (\epsilon_S + \epsilon_V)) - (z_j + (\epsilon_S + \epsilon_V)) \quad (5.12)$$

$$\geq \Delta_{ic} - 2(\epsilon_S + \epsilon_V) > 0. \quad (5.13)$$

Thus j^* remains the unique maximizer. $\square$

5.2 Dynamic-programming gates

Definition 5.4 (Equivariant max-plus graph circuit). An equivariant max-plus graph circuit is a finite directed acyclic circuit whose inputs are graph-token features, whose gates are shared over token orbits, and whose primitive gates compute

$$g(x) = \max_{r \in [R]} (a_r^\top x + b_r) \quad (5.14)$$

or ordinary affine maps, with outputs transforming equivariantly under graph relabeling.

Lemma 5.5 (Tropical heads implement max-plus affine gates). *For a bounded token domain, a tropical attention head followed by shared affine maps can implement, or uniformly approximate, a finite max-plus affine gate $g(x) = \max_r (a_r^\top x + b_r)$.*

Proof. Create one candidate key-value channel for each affine form. A shared linear map computes the candidate score $a_r^\top x + b_r$ and stores it as $S_{ir} + V_{rc}$ for an appropriate query row i and output coordinate c . Tropical attention takes the maximum over r . If exact candidate construction is not available because candidate identities are embedded continuously, a feed-forward network approximates the candidate scores uniformly on the compact domain, and the Lipschitz property of maximum transfers this approximation to the gate output. $\square$

Proposition 5.6 (One Bellman-Ford relaxation as tropical attention). *For a directed weighted graph with current distances D_u and edge weights $w_{u \rightarrow v}$, the relaxation*

$$D'_v = \min \left(D_v, \min_{u: u \rightarrow v} (D_u + w_{u \rightarrow v}) \right) \quad (5.15)$$

can be implemented by a min-plus variant of tropical attention with an incidence mask.

Proof. Use the identity $\min_j z_j = -\max_j (-z_j)$. For each query node v , mask keys to include v itself and predecessors u satisfying $u \rightarrow v$. Give the self-candidate value D_v and predecessor candidate value $D_u + w_{u \rightarrow v}$. Applying negative max-plus attention computes the minimum over these candidates. The incidence mask is equivariant by mask equivariance. Therefore the relaxation is equivariant. $\square$

Theorem 5.7 (Tropical TokenGT approximation of bounded semiring algorithms). *Let A be a graph algorithm over bounded graphs that can be unrolled into T finite max-plus, min-plus, or Boolean semiring circuit layers with shared local rules and equivariant masks. Then a ToricGT stack with tropical heads and shared feed-forward layers uniformly approximates the unrolled algorithm on the bounded graph domain and is graph equivariant.*

Proof. Each primitive semiring gate is either a max/min over finitely many affine candidates, an addition of finite channels, or a Boolean threshold. Max/min gates are implemented by tropical heads by the previous lemma; additions are affine maps; thresholds can be uniformly approximated away from zero-margin decision boundaries by ReLU feed-forward layers, or represented exactly if Boolean values are embedded as 0 and $-\infty$ with exact masks. Composing the approximating layers gives an approximation to the unrolled circuit. Equivariance follows because every gate is shared over node and edge orbits and every mask transforms by conjugation. $\square$

Tropical active path and max-plus envelope

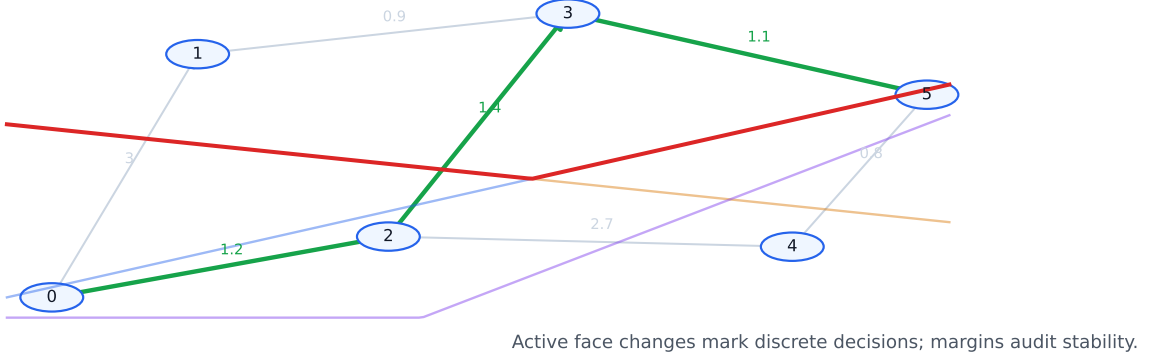


Figure 2: Tropical reasoning diagnostics. Left: a shortest-path-style active predecessor path. Right: a piecewise-linear tropical envelope whose active face and margin provide a direct explanation of a discrete decision.

6 Toric geometry of neural-network charts

The previous section treats tropical heads as max-plus computation. A complementary view comes from toric geometry. Fu’s toric geometry of ReLU neural networks formalizes an observation that is directly useful for ToricGT: an unbiased rational ReLU network determines a polyhedral fan, a toric variety, and a Cartier divisor whose support function is the network output up to linear shift [1]. This section imports the part of that dictionary that is operational for a graph-token model. The goal is not to make ToricGT an algebraic variety. The goal is to expose the polyhedral and divisor-like structure already present in max-plus and ReLU subcomputations, and then use it as a diagnostic and a next-iteration training target.

6.1 Minimal toric dictionary

Let $N \simeq \mathbb{Z}^r$ be a cocharacter lattice and $M = \text{Hom}(N, \mathbb{Z})$ its character lattice, with pairing $\langle m, u \rangle$ for $m \in M$ and $u \in N$ [6]. A rational polyhedral cone is

$$\sigma = \text{Cone}(u_1, \dots, u_s) = \left\{ \sum_{j=1}^s \lambda_j u_j : \lambda_j \geq 0, u_j \in N \right\} \subset N_{\mathbb{R}}. \quad (6.1)$$

A fan Σ is a finite collection of cones closed under faces and pairwise intersections. A toric variety X_{Σ} is glued from affine charts indexed by cones of Σ . For this manuscript, the key combinatorial object is not the variety itself but the support function of a torus-invariant Cartier divisor:

$$\varphi_D : |\Sigma| \rightarrow \mathbb{R}, \quad \varphi_D(u) = \langle m_{\sigma}, u \rangle \quad \text{for } u \in \sigma. \quad (6.2)$$

The vectors $m_{\sigma} \in M$ are the Cartier data. They are exactly the slopes of the piecewise-linear function on each maximal cone. Across a shared wall $\tau = \sigma \cap \sigma'$, the difference $m_{\sigma} - m_{\sigma'}$ measures the bend of the support function. In toric geometry this bend is encoded by the intersection number of D with the torus-invariant curve $V(\tau)$; in a neural network it is the algebraic form of a kink.

Definition 6.1 (Toric chart probe). Let $H \in \mathbb{R}^{L \times d}$ be a graph-token hidden table. A toric chart probe is a shared map

$$\Pi(H_i) = (\ell_1(H_i), \dots, \ell_R(H_i)), \quad \ell_r(h) = \langle a_r, h \rangle + b_r, \quad (6.3)$$

where $a_r \in \mathbb{Q}^d$ after optional rational quantization. Its tropical output is

$$\psi(h) = \max_{r \leq R} \ell_r(h). \quad (6.4)$$

The associated Newton polytope is

$$P_\Pi = \text{Conv}(a_1, \dots, a_R) \subset (\mathbb{Q}^d)^*. \quad (6.5)$$

The rationality condition is not a training restriction. It is an audit restriction: a learned real-valued probe can be rounded to a rational lattice at evaluation time, just as finite Weyl-pair tasks approximate irrational rotations by rational phases. This gives a reproducible, byte-stable object for visualization and comparison across checkpoints.

Theorem 6.2 (Active faces are normal-fan cells). *Let $\psi(h) = \max_r (\langle a_r, h \rangle + b_r)$ and let*

$$A(h) = \arg \max_r (\langle a_r, h \rangle + b_r). \quad (6.6)$$

For any active set A , define the lifted face

$$F_A = \text{Conv}\{(a_r, b_r) : r \in A\} \subset (\mathbb{Q}^d)^* \times \mathbb{Q}. \quad (6.7)$$

Then the set of hidden states with active set containing A is a polyhedron cut out by linear inequalities

$$\langle a_r - a_s, h \rangle + b_r - b_s \geq 0, \quad r \in A, s \notin A. \quad (6.8)$$

Equivalently, active-face diagnostics of a tropical head are cells in the normal fan of the lifted Newton polytope $\text{Conv}\{(a_r, b_r)\}_{r=1}^R$.

Proof. The condition that r is at least as good as s is precisely

$$\langle a_r, h \rangle + b_r \geq \langle a_s, h \rangle + b_s, \quad (6.9)$$

which is a linear half-space condition in h . Intersecting these half-spaces over all active candidates and inactive competitors gives the stated polyhedron. A face of a polytope is exposed by a linear functional. Here the functional is $(a, b) \mapsto \langle a, h \rangle + b$, so candidates maximizing the tropical expression are exactly the vertices lying on the exposed face. As h varies, these exposed faces are organized by the normal fan. $\square$

Corollary 6.3 (Tropical margins are fan distances). *For a unique active candidate r^* , the margin*

$$\Delta(h) = \min_{s \neq r^*} [\langle a_{r^*} - a_s, h \rangle + b_{r^*} - b_s] \quad (6.10)$$

is the signed distance to the nearest wall of the active normal-fan cell, up to the norm of the corresponding wall normal.

Proof. The boundary between r^* and a competitor s is the affine hyperplane

$$\langle a_{r^*} - a_s, h \rangle + b_{r^*} - b_s = 0. \quad (6.11)$$

The Euclidean distance to this hyperplane is the displayed affine value divided by $\|a_{r^*} - a_s\|_2$. Taking the minimum over competitors gives the nearest wall. Without the denominator, $\Delta(h)$ is the unnormalized signed fan distance. $\square$

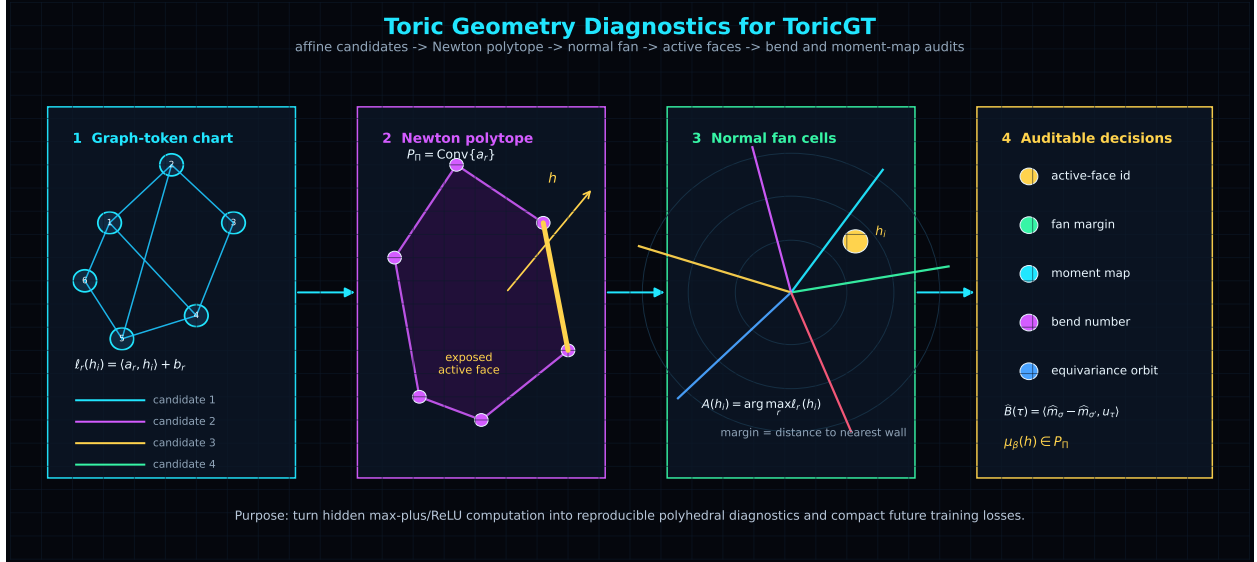


Figure 3: Toric-geometric interpretation of ToricGT tropical subcomputations. A graph-token hidden state is scored by affine candidates. Their exponent vectors form a Newton polytope; its normal fan partitions hidden space into active regions. Active faces and bend numbers become diagnostics for reasoning decisions and future toric auxiliary losses.

6.2 ReLU fans, Cartier data, and ToricGT diagnostics

A feed-forward ReLU network is continuous piecewise linear. Fu defines its ReLU fan Σ_{f_θ} as the canonical polyhedral complex on which all hidden-layer piecewise-linear functions and the output are linear. The corresponding ReLU toric variety is $X_{\Sigma_{f_\theta}}$, and the output function is the support function of a ReLU Cartier divisor D_f on that fan [1]. Zhang, Naitzat, and Lim earlier showed that ReLU networks can be represented as tropical rational maps and that their decision boundaries are controlled by tropical hypersurfaces [2]. Later work uses activation polytopes and classification fans to study real tropical decision regions [3], and lattice-polytope arguments give depth lower bounds for integral ReLU networks [4]. The toric view refines this by giving a divisor and intersection-number language for the same bends.

ToricGT contains two sources of piecewise-linear structure. First, tropical attention heads are explicitly max-plus. Second, ordinary feed-forward and Soft-MoE expert sublayers often use ReLU or GELU-like gates; ReLU subpaths admit exact fan descriptions, while smooth gates admit local linearization or temperature-controlled max approximations. For a fixed checkpoint and a bounded evaluation corpus, one can attach an *empirical ReLU fan* to any probe subnetwork by clustering hidden states according to activation signs and tropical active faces.

Definition 6.4 (Empirical toric shadow). Fix a bounded batch family $\mathcal{B}$ and a ToricGT checkpoint. Let $\mathcal{A}(h)$ collect the binary ReLU activation pattern, tropical active-face pattern, and Soft-MoE dominant-slot pattern of a chosen subnetwork at hidden state h . The empirical toric shadow is the finite cell decomposition

$$\hat{\Sigma}_{\mathcal{B}} = \{ \{h \in \mathcal{B} : \mathcal{A}(h) = a\} : a \in \text{im } \mathcal{A} \}, \quad (6.12)$$

equipped with fitted local slopes $\hat{m}_\sigma$ for each occupied cell σ .

Local slopes can be estimated by least squares over hidden-state/output pairs inside a cell:

$$\hat{m}_\sigma = \arg \min_m \sum_{h_i \in \sigma} |\psi(h_i) - \langle m, h_i \rangle|^2. \quad (6.13)$$

The fitted slopes are not used to prove exact representability of the learned model. They are used to inspect whether the checkpoint has learned stable polyhedral computation: low within-cell residual, large fan margins, repeated bend patterns across equivalent graph situations, and coherent Newton-polytopal active faces.

Proposition 6.5 (Equivariance of toric shadows). *Assume the probe, attention masks, tropical heads, and Soft-MoE routers are shared over token rows and have no absolute token-index input. If P_π is a graph-token relabeling, then the empirical toric shadow of πG is the row-permuted shadow of G . In particular, the multiset of Newton polytopes, active-face dimensions, tropical margins, and fitted bend magnitudes is invariant under graph relabeling.*

Proof. By tokenization and block equivariance, hidden states transform by row permutation. Shared probes and routers therefore produce the same activation, slot, and active-face labels on permuted rows. The Newton polytope of a shared probe depends only on its candidate slopes, not on row order. Least-squares slope fitting within a cell is unchanged after relabeling because the objective is a sum over the same points in permuted order. Hence all listed diagnostics are invariant as multisets, with only token labels permuted. $\square$

Definition 6.6 (Bend audit). Let σ, σ' be adjacent occupied cells in an empirical toric shadow, with shared wall normal u_τ after rational approximation. The empirical bend across the wall $\tau = \sigma \cap \sigma'$ is

$$\widehat{B}(\tau) = \langle \hat{m}_\sigma - \hat{m}_{\sigma'}, u_\tau \rangle. \quad (6.14)$$

In the exact toric setting, this quantity is the intersection number of the corresponding Cartier divisor with the torus-invariant curve $V(\tau)$. For ToricGT it becomes a diagnostic for whether reasoning decisions change consistently across equivalent graph perturbations. For example, in a shortest-path task, crossing a wall that changes the active predecessor should produce a bend aligned with the edge-weight difference. In a Hebrew root-template alignment task, crossing a wall that changes a radical-slot assignment should produce a bend localized to the relevant template slot, not a global drift across unrelated graph tokens.

6.3 Moment features and compact toric regularization

Toric geometry also suggests a compact way to summarize a tropical decision. Given affine candidates $\ell_r(h) = \langle a_r, h \rangle + b_r$ and inverse temperature $\beta > 0$, define the soft active-face moment

$$\mu_\beta(h) = \frac{\sum_{r=1}^R \exp(\beta \ell_r(h)) a_r}{\sum_{r=1}^R \exp(\beta \ell_r(h))} \in P_\Pi. \quad (6.15)$$

This is the moment-map analogue of a softmax over candidate exponents. As $\beta \rightarrow \infty$, $\mu_\beta(h)$ converges to a convex combination of the active vertices of the Newton polytope.

Lemma 6.7 (Moment map limit). *If $A(h)$ is the active set of $\psi(h) = \max_r \ell_r(h)$, then every accumulation point of $\mu_\beta(h)$ as $\beta \rightarrow \infty$ lies in $\text{Conv}\{a_r : r \in A(h)\}$. If the active maximizer is unique, $\mu_\beta(h) \rightarrow a_{r^*}$.*

Proof. Write $M = \max_r \ell_r(h)$. Terms with $r \notin A(h)$ are multiplied by $\exp(\beta(\ell_r(h) - M))$, which converges to 0. Terms with $r \in A(h)$ all have exponent 0 after factoring out $\exp(\beta M)$. Therefore the limit is a normalized convex combination of active a_r 's. If $A(h) = \{r^*\}$, only one term remains. $\square$

This gives a low-cost diagnostic for compact models. Rather than storing large explanation traces, a Parameter-Golf-facing model can emit quantized moments $\mu_\beta(h)$, active-face ids, and top-two margins. These are enough to audit whether the small model uses stable polyhedral decisions without increasing the artifact by a large expert bank.

6.4 Toric auxiliary losses for training

The toric view suggests auxiliary losses that do not require changing the deployable architecture. In the `oai` competition branch they are attached as training-only low-rank probes and excluded from the compressed artifact. Let $\mathcal{R}$ be a set of integer relations among exponent vectors,

$$\sum_r \alpha_r a_r = \sum_r \beta_r a_r, \quad \alpha_r, \beta_r \in \mathbb{N}. \quad (6.16)$$

In log-coordinate form, the associated binomial consistency loss is

$$\mathcal{L}_{\text{binom}} = \sum_{(\alpha, \beta) \in \mathcal{R}} \left\| \sum_r \alpha_r \ell_r(h) - \sum_r \beta_r \ell_r(h) \right\|_2^2. \quad (6.17)$$

For active-face stability, a fan-margin loss can be used:

$$\mathcal{L}_{\text{fan}} = \mathbb{E}_h \max \left(0, \gamma - \min_{s \notin A(h), r \in A(h)} [\ell_r(h) - \ell_s(h)] \right). \quad (6.18)$$

For repeated graph situations expected to share the same bend, use

$$\mathcal{L}_{\text{bend}} = \sum_{(\tau, \tau') \in \mathcal{P}} \left| \widehat{B}(\tau) - \widehat{B}(\tau') \right|^2, \quad (6.19)$$

where $\mathcal{P}$ pairs walls that are equivalent under graph relabeling, algebraic normal form, or morphology-template symmetry. These losses are pragmatic: they regularize the geometry of reasoning decisions rather than merely increasing parameter count.

The implemented compact objective also adds affine-Coxeter, braid, and phase-leaf terms:

$$\begin{aligned} \mathcal{L}_{\text{toric}} = & \mathcal{L}_{\text{base}} + \lambda_{\text{fan}} \mathcal{L}_{\text{fan}} + \lambda_{\text{bend}} \mathcal{L}_{\text{bend}} + \lambda_{\text{binom}} \mathcal{L}_{\text{binom}} + \lambda_{\text{moment}} \|\widehat{\mu} - \mu^*\|_2^2 \\ & + \lambda_{\text{cox}} \mathcal{L}_{\text{cox}} + \lambda_{\text{br}} \mathcal{L}_{\text{br}} + \lambda_{\text{leaf}} \mathcal{L}_{\text{leaf}}. \end{aligned} \quad (6.20)$$

Here $\mathcal{L}_{\text{cox}}$ reflects predicted and teacher moments across simple affine walls and compares the reflected points, $\mathcal{L}_{\text{br}}$ compares the two length-three braid paths $s_1 s_2 s_1$ and $s_2 s_1 s_2$, and $\mathcal{L}_{\text{leaf}}$ compares successive projected phase increments with the irrational rotation increments determined by (θ, β) . The probe is low-rank and fake-quantized during training, so it tests whether the main hidden state contains a compact toric chart rather than adding a large explanation module. The evaluation suite separately builds empirical toric shadows from hidden states alone: occupied fan cells, active-face margins, bend magnitudes, fitted-slope residuals, and branch-wise phase-leaf residuals. Thus old checkpoints can be audited even when they were trained before the probe existed.

7 Rotation algebras, noncommutative tori, and spiral projections

7.1 Finite Weyl pairs and normal forms

For $\theta \in \mathbb{R}$, the rotation algebra $\mathcal{A}_\theta$ is generated by unitaries U, V satisfying

$$VU = e^{2\pi i \theta} UV. \quad (7.1)$$

For rational $\theta = p/q$, finite clock and shift matrices give an exact Weyl pair. Let $\omega = e^{2\pi i p/q}$,

$$C_q = \text{diag}(1, \omega, \omega^2, \dots, \omega^{q-1}), \quad S_q e_j = e_{j-1 \bmod q}. \quad (7.2)$$

Lemma 7.1 (Finite clock-shift relation). *The matrices S_q and C_q satisfy*

$$S_q C_q = \omega C_q S_q. \quad (7.3)$$

Proof. Apply both sides to a basis vector e_j , with indices interpreted modulo q . Since $C_q e_j = \omega^j e_j$ and $S_q e_j = e_{j-1}$,

$$S_q C_q e_j = \omega^j e_{j-1}. \quad (7.4)$$

On the other hand,

$$\omega C_q S_q e_j = \omega C_q e_{j-1} = \omega \cdot \omega^{j-1} e_{j-1} = \omega^j e_{j-1}. \quad (7.5)$$

The two operators agree on every basis vector, so $S_q C_q = \omega C_q S_q$. $\square$

Remark 7.2 (Convention discipline). The sign of the clock-shift phase is a common source of synthetic-data bugs. Every generated record must store the shift convention, the normal-form order, and whether the relation is $VU = \omega UV$ or $UV = \omega VU$.

Lemma 7.3 (Rotation-word normal form). *Let $VU = \omega UV$, where $\omega = e^{2\pi i \theta}$. Every word in $U^{\pm 1}, V^{\pm 1}$ reduces to a unique expression*

$$\omega^c U^a V^b, \quad (7.6)$$

where $a, b, c \in \mathbb{Z}$, after fixing the normal-form order U before V . If the word is $W = X_1 \cdots X_T$ and $\deg(X_t) = (u_t, v_t) \in \mathbb{Z}^2$, then

$$a = \sum_{t=1}^T u_t, \quad b = \sum_{t=1}^T v_t, \quad c = \sum_{1 \leq r < s \leq T} v_r u_s, \quad (7.7)$$

with signs interpreted by the same commutation convention.

Proof. The relation $VU = \omega UV$ allows any adjacent out-of-order pair VU to be swapped into UV at the cost of multiplying by ω . Similarly, inverse pairs cancel using $UU^{-1} = U^{-1}U = VV^{-1} = V^{-1}V = 1$, and inverse commutations follow by multiplying the basic relation by inverses. Repeated adjacent swaps bubble all U powers to the left and all V powers to the right. The net exponents a and b are additive because U and V powers combine within their own generators. The phase exponent counts signed crossings in which a V contribution originally appears before a later U contribution; this is exactly $\sum_{r < s} v_r u_s$. Confluence follows because this crossing count depends only on the ordered degree sequence, and all swap sequences that sort the word have the same inversion count in the abelianized degree lattice with the same bilinear cocycle. $\square$

7.2 Higher noncommutative tori

A higher noncommutative torus $\mathcal{A}_\Theta$ is generated by $U_1, \dots, U_n$ with

$$U_j U_k = e^{2\pi i \Theta_{jk}} U_k U_j, \quad (7.8)$$

where $\Theta \in \mathbb{R}^{n \times n}$ is skew-symmetric. For $a, b \in \mathbb{Z}^n$, define the cocycle

$$\sigma_\Theta(a, b) = \exp(2\pi i a^\top \Theta b). \quad (7.9)$$

Lemma 7.4 (Bicharacter identities). *For $a, b, c \in \mathbb{Z}^n$,*

$$\sigma_\Theta(a + b, c) = \sigma_\Theta(a, c) \sigma_\Theta(b, c), \quad (7.10)$$

$$\sigma_\Theta(a, b + c) = \sigma_\Theta(a, b) \sigma_\Theta(a, c), \quad (7.11)$$

$$\sigma_\Theta(a, b) \sigma_\Theta(b, a) = 1. \quad (7.12)$$

Proof. The first two identities follow from bilinearity:

$$(a + b)^\top \Theta c = a^\top \Theta c + b^\top \Theta c, \quad (7.13)$$

and similarly in the second argument. Exponentiating turns sums into products. For the third identity, skew-symmetry gives $b^\top \Theta a = -a^\top \Theta b$. Hence the exponents sum to zero. $\square$

Proposition 7.5 (Projective equivariance of toric transports). *Let T_a be a lattice transport on toric channels satisfying*

$$T_a T_b = \sigma_\Theta(a, b) T_{a+b}. \quad (7.14)$$

If token relabelings act on rows and T_a acts only on toric feature channels attached equivariantly to each row, then ToricGT layers built from shared maps, attention, and T_a are graph-equivariant and projectively lattice-equivariant.

Proof. A graph relabeling P_π acts by row permutation. A toric transport T_a acts within the channel vector of every row by the same linear operator or by an endpoint-derived equivariant channel rule. Therefore $P_\pi T_a = T_a P_\pi$. The only noncommutativity among transports is the scalar cocycle $\sigma_\Theta(a, b)$, which yields projective equivariance. Since all other sublayers are row-shared and equivariant, the composition retains graph equivariance and the stated projective lattice law. $\square$

7.3 Infinite spiral projection

The infinite spiral view is a visualization, not a finite representation theorem. It makes the irrational rotation visible: repeated additions of α never close when α is irrational, and the orbit winds densely.

Lemma 7.6 (Density of an irrational circle orbit). *If $\alpha \notin \mathbb{Q}$, then the set $\{k\alpha \bmod 1 : k \in \mathbb{N}\}$ is dense in $[0, 1)$.*

Proof. Fix $N \in \mathbb{N}$. Consider the $N + 1$ points $0, \alpha, 2\alpha, \dots, N\alpha$ modulo 1. Partition $[0, 1)$ into N intervals of length $1/N$. By the pigeonhole principle, two points $r\alpha$ and $s\alpha$ lie in the same interval, so $\delta = (s - r)\alpha \bmod 1$ has distance at most $1/N$ from 0. Since α is irrational, $\delta \neq 0$. The arithmetic progression $0, \delta, 2\delta, \dots$ modulo 1 visits every interval of length roughly $1/N$ before wrapping. Because N was arbitrary, every open interval contains some $k\alpha \bmod 1$. $\square$

Spiral diagnostics for irrational rotations

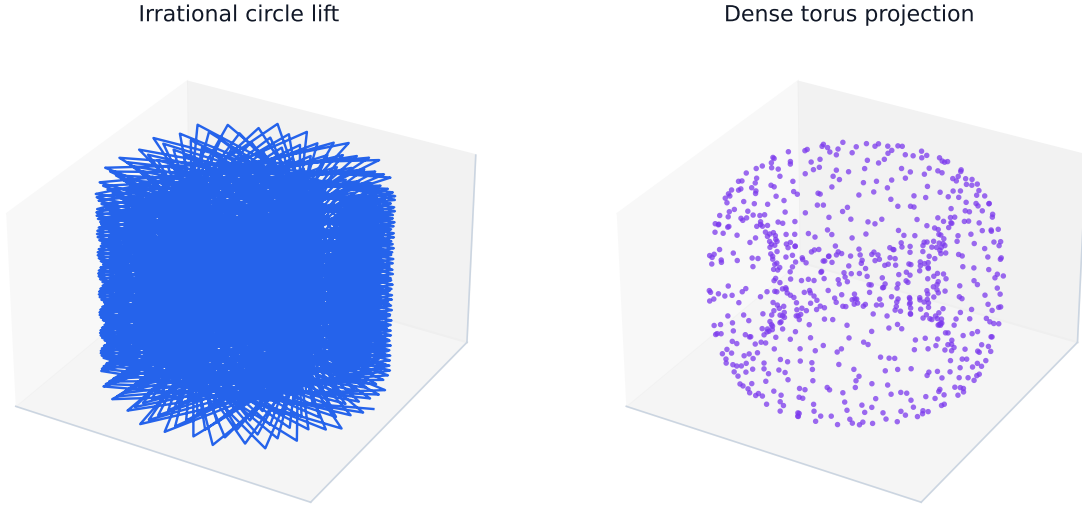


Figure 4: Infinite spiral-projection diagnostic for the rotation algebra and noncommutative torus. The cylinder shows irrational rotation by α ; the torus projection visualizes dense phase winding and finite phase-channel truncations.

Definition 7.7 (Spiral projection feature). For irrational α and truncation length K , define the spiral-projection feature path

$$\Gamma_K(k) = (\cos(2\pi k\alpha), \sin(2\pi k\alpha), k/K), \quad 0 \leq k < K, \quad (7.15)$$

and the projected torus path

$$\Pi_K(k) = ((R + r \cos(2\pi k\beta)) \cos(2\pi k\alpha), (R + r \cos(2\pi k\beta)) \sin(2\pi k\alpha), r \sin(2\pi k\beta)), \quad (7.16)$$

where $1, \alpha, \beta$ are rationally independent.

Proposition 7.8 (Finite feature convergence of phases). *Let p_k/q_k be continued-fraction approximants to α . Then*

$$\left| e^{2\pi i p_k/q_k} - e^{2\pi i \alpha} \right| \leq 2\pi |p_k/q_k - \alpha| \rightarrow 0. \quad (7.17)$$

Proof. For real x, y , $|e^{ix} - e^{iy}| = 2 |\sin((x-y)/2)| \leq |x-y|$. Set $x = 2\pi p_k/q_k$ and $y = 2\pi\alpha$. Continued-fraction convergence gives $p_k/q_k \rightarrow \alpha$. $\square$

7.4 Trace supervision

The canonical trace on the rotation algebra satisfies

$$\tau(U^a V^b) = \begin{cases} 1, & a = b = 0, \\ 0, & \text{otherwise.} \end{cases} \quad (7.18)$$

For a finite Weyl-pair approximation, the normalized trace $q^{-1} \text{Tr}(C_q^a S_q^b)$ obeys the same selection rule modulo q .

Lemma 7.9 (Finite trace selection). *For the q -dimensional Weyl pair, if $a, b \in \mathbb{Z}$, then*

$$\frac{1}{q} \text{Tr}(C_q^a S_q^b) = 0 \quad (7.19)$$

unless $a \equiv b \equiv 0 \pmod{q}$, in which case the normalized trace is 1.

Proof. If $b \not\equiv 0 \pmod{q}$, then S_q^b has no fixed basis vector, so $C_q^a S_q^b$ has zero diagonal and zero trace. If $b \equiv 0 \pmod{q}$, then $S_q^b = I$ and

$$\text{Tr}(C_q^a) = \sum_{j=0}^{q-1} \omega^{aj}. \quad (7.20)$$

This geometric sum is q when $\omega^a = 1$, equivalently $a \equiv 0 \pmod{q}$, and is 0 otherwise. $\square$

8 Hebrew roots as graph-structured morphology

8.1 Why Hebrew morphology belongs in ToricGT

Biblical and classical Hebrew morphology is naturally graph-structured. A surface form is not merely a string: it is related to a lexical root, ordered radicals, a vocalic/consonantal template, a binyan or stem, prefixes and suffixes, morphosyntactic features, a lemma, a gloss, and a source span. These objects form a typed graph with many-to-many dependencies. A root such as **כתב** (transliterated K-T-B) participates in forms such as *katav* (**כָּתַב**, “he wrote”), *kotev* (writing/writer), and *miktav* (letter or writing). A model trained only on linear strings must rediscover this structured factorization; a graph-token model can represent it explicitly.

Classical grammars describe Hebrew and other Semitic languages through roots, stems, and patterns; computational morphology often implements such analyses with finite-state or two-level systems [42, 43, 44, 45, 46, 47]. ToricGT does not replace a morphological analyzer. It consumes analyzer outputs, text spans, and uncertain analyses as typed graph evidence, and learns graph-to-graph tasks over those analyses.

Definition 8.1 (Hebrew root-template record). A Hebrew morphology record is a typed graph

$$G_H = (V_H, E_H, \tau, \rho, x, \ell, y) \quad (8.1)$$

with node types


$$\begin{aligned} \mathcal{T}_V^H = \{ & \text{Root, Radical, Pat, Binyan, Feat, Prefix, Suffix,} \\ & \text{SurfaceForm, Lemma, Gloss, VerseSpan, Paradigm, AnalyzerHypothesis} \}, \end{aligned} \quad (8.2)$$

and edge types

$$\begin{aligned} \mathcal{T}_E^H = \{ & \text{has_radical, fills_slot, has_template, has_binyan, has_feature,} \\ & \text{attested_at, glosses, same_root, paradigm_member, analyzer_score} \}. \end{aligned} \quad (8.3)$$

The target y may include root identity, radical-slot alignment, binyan, feature bundle, lemma, gloss, paradigm membership, and confidence.

Root-template morphology as a typed graph

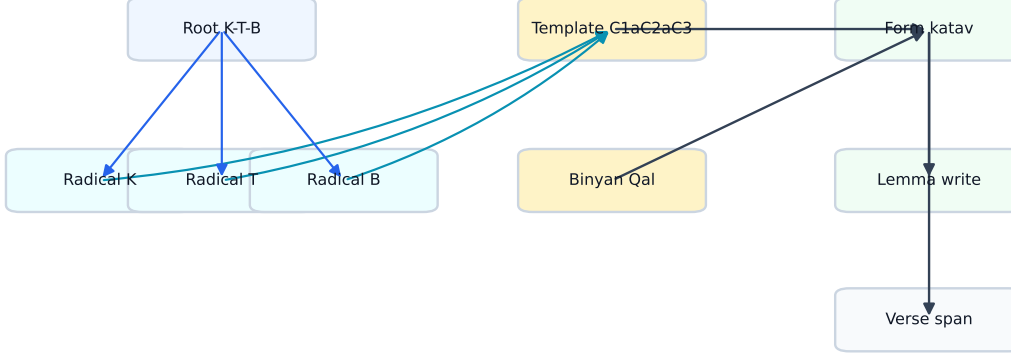

Records preserve analyzer uncertainty, paradigm edges, source spans, and semiring alignment losses.

Figure 5: A root-template graph for K-T-B. The actual graph record can also store Hebrew glyphs and source spans; the figure uses transliteration for directional readability.

Definition 8.2 (Root-template rendering relation). Let $r = (r_1, r_2, r_3)$ be an ordered radical tuple, p a template with consonant slots C_1, C_2, C_3 and vocalic/affix material, b a binyan, and f a feature bundle. The rendering relation is a partial relation

$$\mathcal{R}_H \subseteq \text{Root} \times \text{Pat} \times \text{Binyan} \times \text{Feat} \times \text{SurfaceForm} \quad (8.4)$$

where $(r, p, b, f, w) \in \mathcal{R}_H$ if w is licensed by inserting radicals into template slots and applying the orthographic/phonological rules attached to b and f .

Remark 8.3 (Root ambiguity). A Hebrew surface string can have multiple analyses. Matres lectionis, missing niqqud, weak roots, gutturals, homographs, and clitic morphology can all create ambiguity. The graph schema therefore allows multiple analyzer-hypothesis nodes with scores, instead of forcing a single gold analysis when the evidence is uncertain.

8.2 Graph construction algorithm

Given a tokenized Hebrew or biblical-Hebrew text with optional morphology, construct G_H as follows.

1. Create one **SurfaceForm** node per token or morpheme span.
2. For each analyzer hypothesis, create a hypothesis node with score s_h .
3. Attach root, radical, template, binyan, feature, lemma, gloss, and span nodes. Share root and paradigm nodes across forms when the analyzer or lexicon identifies the same root.
4. Add **fills_slot** edges from radicals to template slots and from slots to surface spans.
5. Add **same_root** and **paradigm_member** edges between lexemes/forms with the same root family.

6. Preserve uncertainty by edge weights or hypothesis scores rather than deleting non-maximal analyses.

Lemma 8.4 (Typed acyclicity of local morphology subgraphs). *If paradigm-sharing edges are removed, each local root-template analysis graph is acyclic when edges are oriented from abstract causes to surface evidence.*

Proof. Order node types by the partial order

$$\text{Root, Radical, Pat, Binyan, Feat} \prec \text{AnalyzerHypothesis} \prec \text{SurfaceForm} \prec \text{Lemma, Gloss, VerseSpan}. \quad (8.5)$$

Edges in a local analysis go from an earlier type to a later type, or from a hypothesis to a surface node. Since every directed edge increases this type rank, no directed cycle can occur. Paradigm-sharing edges intentionally introduce global family structure and are excluded from the local acyclicity claim. $\square$

Lemma 8.5 (Functoriality under graph relabeling). *Let C be a deterministic converter from morphology records to typed graphs, and let π be a relabeling of source token identifiers that preserves source spans and analyzer hypotheses. Then*

$$C(\pi \cdot R) = \pi \cdot C(R). \quad (8.6)$$

Proof. The converter creates graph nodes by deterministic functions of record fields: token id, span id, root id, hypothesis id, feature id, and lexicon id. Relabeling source token ids simply relabels the nodes whose keys contain those token ids. Shared lexical nodes such as root and binyan nodes are unaffected except for incident edge endpoints. Therefore every node and edge in $C(R)$ is carried to the corresponding node and edge in $C(\pi R)$. $\square$

8.3 Hebrew morphology losses

Let p_R , p_B , p_F , and p_L denote predicted distributions over roots, binyanim, feature bundles, and lemmas. Let $A \in [0, 1]^{3 \times S}$ be a predicted radical-to-slot alignment for a three-radical root and A^* the target alignment. Define

$$\mathcal{L}_{\text{root}} = -\log p_R(R^*), \quad (8.7)$$

$$\mathcal{L}_{\text{binyan}} = -\log p_B(B^*), \quad (8.8)$$

$$\mathcal{L}_{\text{feat}} = -\sum_{f \in \mathcal{F}} [y_f \log p_F(f) + (1 - y_f) \log(1 - p_F(f))], \quad (8.9)$$

$$\mathcal{L}_{\text{align}} = -\sum_{i=1}^3 \sum_{s=1}^S A_{is}^* \log A_{is}. \quad (8.10)$$

Paradigm consistency can be enforced by a cycle loss. If z_w is the embedding of a surface form and z_R is the embedding of its root family,

$$\mathcal{L}_{\text{par}} = \sum_{(w, w') : \text{Root}(w) = \text{Root}(w')} \| (z_w - z_R) - (z_{w'} - z_R) \|_2^2 - \sum_{(w, u) : \text{Root}(w) \neq \text{Root}(u)} \max(0, \gamma - \|z_w - z_u\|)^2. \quad (8.11)$$

Proposition 8.6 (Paradigm loss is relabeling invariant). *If root-family membership is represented by equivariant graph edges and embeddings transform by token permutation, then $\mathcal{L}_{\text{par}}$ is invariant under graph relabeling.*

Proof. Relabeling permutes the set of surface-form nodes and root-family edges but does not change which unordered pairs are same-root or different-root. The summands depend only on Euclidean distances between the corresponding permuted embeddings. Euclidean distance is unchanged by row reindexing. Therefore the entire sum is invariant. $\square$

8.4 Tropical alignment for root extraction

Root-template alignment can be cast as a shortest-path problem over a small weighted finite-state graph. Let $w_1, \dots, w_T$ be surface characters or consonantal skeleton symbols, and let template states record how many radical slots have been filled. A transition either consumes a surface symbol as affix/vowel material or aligns it to the next radical slot. With costs $c_t(q, q')$, the best analysis is

$$D_{t+1}(q') = \min_q (D_t(q) + c_t(q, q')) . \quad (8.12)$$

Theorem 8.7 (Root-template alignment is min-plus dynamic programming). *For a fixed finite template inventory and bounded token length T , the best radical-slot alignment is computed by a finite min-plus circuit and can therefore be represented by tropical ToricGT layers.*

Proof. The dynamic program has finitely many states because the template inventory and maximum word length are bounded. Each update is a minimum over finitely many predecessor states of an affine expression $D_t(q) + c_t(q, q')$. This is a min-plus gate. Unrolling for T time steps yields a finite min-plus circuit. By the tropical semiring approximation theorem above, ToricGT can implement or approximate this circuit on the bounded domain. $\square$

8.5 Hebrew graph tasks

ToricGT should include at least the following Hebrew-specific tasks.

1. **Root recovery:** predict the root node and ordered radicals from a surface form and context.
2. **Binyan classification:** predict stem/binyan and verbal pattern.
3. **Feature tagging:** predict person, number, gender, tense/aspect, state, and part of speech when represented in the source annotation.
4. **Paradigm completion:** given several forms in a root family, predict missing forms or missing feature nodes.
5. **Graph disambiguation:** choose among analyzer hypotheses using local context and source-span dependencies.
6. **Interlinear graph construction:** convert text plus morphology into lemma, gloss, and dependency graphs.

9 Reasoning capacity and visualization contract

Definition 9.1 (Visualization contract). A ToricGT run satisfies the visualization contract if it emits, for every evaluation batch, the following diagnostic objects: relabeling orbits, attention/ring block provenance, tropical active-face maps, toric phase trajectories, Hebrew root-template sub-graphs when applicable, proof-dependency graphs, GFlowNet terminal samples, and reward/margin/error summaries.

Reasoning capacity is audited at each computational layer

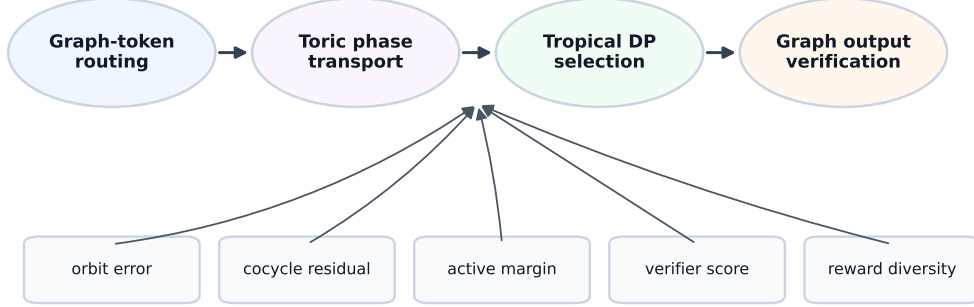


Figure 6: Reasoning capacity as a composition of graph-token routing, algebraic transport, tropical inference, and graph-level output. The model should expose checks at each stage rather than returning only an answer string.

Diagnostic	Computation	Failure mode exposed
Equivariance orbit	$\ F(\pi G) - P_\pi F(G)\ $ over random π	absolute-position leakage, edge-order bugs
Tropical active face	$A_{ic} = \arg \max_j (S_{ij} + V_{jc})$ and margin Δ_{ic}	tropical collapse, unstable DP decisions
Torus commutator	$\ U_j U_k H - e^{2\pi i \Theta_{jk}} U_k U_j H\ $	phase memorization without cocycle structure
Hebrew paradigm lattice	root-family edges and feature-bundle consistency	string memorization without root-template abstraction
GFlowNet diversity	terminal graph count, edit distance, reward histogram	mode collapse, reward hacking
Polar cache residual	$\ K - \hat{K}\ $, $\ V - \hat{V}\ $, argmax preservation rate	quantization damaging long-context retrieval

The `oai` analysis suite implements this contract with interactive 3D diagnostics. For each sampled graph-of-thought branch it plots focused hidden-state coordinates, local Vietoris–Rips 1/2-complexes, toric active-face colors, chamber-crossing markers, empirical normal-fan rays, convex chamber-polytopes for occupied active faces, fitted wall sheets at observed tropical/toric crossings, and a small Newton-polytope shadow built from the pseudo-exponents used by the empirical fan audit. The energy-landscape companion lifts local NLL to the vertical axis and overlays the same chamber and wall geometry. Sparse/default/dense controls adjust the local simplicial radius; Plotly legend toggles isolate branches, complexes, chambers, walls, and polytopes.

Proposition 9.2 (Visualization invariance). *Suppose diagnostic functions are defined from graph-invariant quantities or equivariant token quantities followed by canonical graph rendering. Then relabeling the input graph changes only node/edge labels in the visualization, not the diagnostic values.*

Proof. Equivariance errors are norms of aligned outputs and are invariant under row permutation. Active-face sets transform by the same token permutation, and canonical rendering quotients out

Visualization contract dashboard



Figure 7: Visualization dashboard targets. The dashboard should make reasoning behavior falsifiable: a good scalar metric is not sufficient if equivariance, phase, active-face, morphology, or diversity diagnostics fail.

Actions include adding a reasoning node, adding or relabeling an edge, applying a braid generator $\sigma_i^{\pm 1}$, applying an affine Coxeter reflection s_i , applying a toric shift or clock operation, choosing a tropical active face, requesting a local proof check, selecting a Hebrew analyzer hypothesis, and terminating.

Definition 10.2 (Trajectory balance loss). For a trajectory $\tau = (s_0, a_0, s_1, \dots, s_T = x)$, forward policy P_F , backward policy P_B , reward $R(x) > 0$, and learned partition scalar $Z > 0$, trajectory balance is

$$\mathcal{L}_{\text{TB}}(\tau) = \left(\log Z + \sum_{t=0}^{T-1} \log P_F(s_{t+1} \mid s_t) - \log R(x) - \sum_{t=0}^{T-1} \log P_B(s_t \mid s_{t+1}) \right)^2. \quad (10.2)$$

Theorem 10.3 (Trajectory balance terminal law). *If the trajectory-balance equation holds exactly for every complete trajectory and the backward policy is normalized over parents of every state, then the marginal probability of sampling terminal object x under the forward policy is proportional to $R(x)$.*

Proof. Exact trajectory balance states

$$Z \prod_{t=0}^{T-1} P_F(s_{t+1} \mid s_t) = R(x) \prod_{t=0}^{T-1} P_B(s_t \mid s_{t+1}). \quad (10.3)$$

Sum both sides over all trajectories ending at fixed terminal object x . The left side becomes $Z P_F(x)$, the forward marginal probability of reaching x . The right side becomes $R(x)$ times the sum of backward probabilities over all reverse paths from x to the initial state. Because P_B is normalized over parents and every reverse path terminates at the unique initial state, this sum is 1. Hence $P_F(x) = R(x)/Z$. $\square$

A useful ToricGT reward is

$$R(x) = \exp \left(\frac{\lambda_c C(x) + \lambda_n N(x) - \lambda_e E_{\text{eq}}(x) + \lambda_t \Delta_{\text{trop}}(x) - \lambda_H H(x) - \lambda_\Theta E_\Theta(x)}{\tau} \right), \quad (10.4)$$

where C is correctness, N is novelty, E_{eq} is equivariance error, Δ_{trop} is tropical margin, H is complexity, and E_Θ is toric commutator error.

11 Anticipative reasoning-trajectory memory

Long-context tropical ring attention makes it practical to place retrieved reasoning traces in the context window, but the model still needs to learn which traces are worth consulting. ToricGT therefore uses a small anticipative memory layer. It stores completed graph-of-thought trajectories and trains a retrieval head that predicts helpful trajectories before the expensive search roll-out begins.

Definition 11.1 (Trajectory-memory record). For a completed trajectory $\tau = (h_1, \dots, h_T)$ with hidden states $h_t \in \mathbb{R}^d$, define a memory record

$$\mathcal{M}_i = (k_i, v_i, \mu_i, q_i), \quad (11.1)$$

where k_i is a compact key, v_i is a value payload such as a serialized graph trace or solution span, μ_i contains metadata and split information, and q_i is a quality score such as verifier reward, negative answer BPB, or negative local NLL.

The implemented key is

$$k(\tau) = \text{norm} [\bar{h}, h_T - h_1, \bar{v}, \sigma_v, \kappa, \rho_{\text{VR}}, \phi_\theta, \phi_\beta, q(\tau)], \quad (11.2)$$

where $\bar{h}$ is the mean hidden state, $h_T - h_1$ is endpoint displacement, $\bar{v}$ and σ_v summarize hidden-step speed, κ is a curvature proxy, ρ_{VR} is a Vietoris–Rips radius/density summary, and ϕ_θ, ϕ_β are noncommutative-toric phase-shadow moments.

Definition 11.2 (Anticipative retrieval head). Given a current state summary s and a memory key k_i , the retrieval head scores

$$r_\psi(s, i) = \frac{\langle Q_\psi(s), K_\psi(k_i) \rangle}{\tau_r}. \quad (11.3)$$

During training, an in-batch teacher score is

$$\tilde{r}(s, i) = \lambda_G \langle g_s, g_i \rangle + \lambda_\Theta \langle \phi_s, \phi_i \rangle - \lambda_T d_{\text{top}}(s, i) + q_i, \quad (11.4)$$

where g is the GraphCG chart coordinate, ϕ is the toric phase summary, and d_{top} is a local-topology distance.

The auxiliary objective is

$$\mathcal{L}_{\text{mem}} = \text{CE} \left(\text{softmax } r_\psi, \arg \max_i \tilde{r}(s, i) \right) + \eta \text{KL}(\text{softmax } \tilde{r} \parallel \text{softmax } r_\psi) + \xi \|\hat{q} - q\|_2^2. \quad (11.5)$$

This objective is intentionally small and late-phase. It teaches the model a retrieval geometry before the full offline library is inserted into long contexts.

Proposition 11.3 (Score-first safety of trajectory memory). *If every retrieved memory item is generated from completed training trajectories, a fixed prevalidation library, or legal score-before-update online state, then adding retrieved trajectory payloads to the context does not violate prequential byte scoring.*

Proof. At scoring step t , the predictive distribution may depend on fixed model parameters, public metadata, the strict prefix, and any auxiliary state that is a function only of already scored data. Completed training trajectories and fixed libraries are independent of the unscored validation suffix. Score-before-update online memories are, by induction, functions only of previously scored bytes. Therefore a retrieval function over such items cannot depend on b_t or $b_{>t}$ before the loss term for b_t is recorded. The prequential log score remains valid. $\square$

In the current implementation, `TrajectoryMemoryIndex` stores CPU JSONL memory records and cosine-searches compact keys. `TrajectoryRetrievalHead` trains the in-batch score and logs recall, entropy, score gap, cross-entropy, distillation, and quality-regression metrics to W&B. The active `oai` configuration instantiates the head but keeps its weight at zero during BPB-first recovery, then activates a small loss in later GFlowNet/GraphCG/topology phases.

12 Interleaving PolarQuant with ToricGT ring attention

12.1 Applicability

PolarQuant is directly relevant when ToricGT performs long-context autoregressive graph-token decoding, verifier decoding over long proof graphs, or ring-attention inference over very long tokenized graph traces. It is less relevant to small full-context training batches where no KV cache is materialized or where training memory is dominated by activations rather than cached keys and values. Its best role in ToricGT is therefore optional: a long-context inference and evaluation module, plus a stress-test for ring attention under compressed cache memory.

Han, Kacham, Karbasi, Mirrokni, and Zandieh introduce PolarQuant as a KV-cache quantization method using random preconditioning, recursive polar transformation, and angle quantization [41]. The method is motivated by the fact that KV cache memory scales with context length, layers, and heads; their paper reports over $\times 4.2$ compression while maintaining strong long-context performance.

12.2 Recursive polar transform

Assume the head dimension d_h is a power of two. For $x \in \mathbb{R}^{d_h}$, define level-one angles and radii by pairing coordinates:

$$r_j^{(1)} = \sqrt{x_{2j-1}^2 + x_{2j}^2}, \quad \psi_j^{(1)} = \text{atan2}(x_{2j}, x_{2j-1}), \quad j = 1, \dots, d_h/2. \quad (12.1)$$

For $\ell \geq 2$, recursively pair radii:

$$r_j^{(\ell)} = \sqrt{(r_{2j-1}^{(\ell-1)})^2 + (r_{2j}^{(\ell-1)})^2}, \quad \psi_j^{(\ell)} = \tan^{-1} \left(\frac{r_{2j}^{(\ell-1)}}{r_{2j-1}^{(\ell-1)}} \right). \quad (12.2)$$

The transform stores one final radius $r^{(\log_2 d_h)}$ and $d_h - 1$ angles.

Lemma 12.1 (Polar transform is invertible off coordinate-pair degeneracies). *For $x \neq 0$, the recursive polar representation with exact radius and exact angles reconstructs x uniquely, up to the standard angle-convention choices on zero coordinates.*

Proof. At level ℓ , each pair (a, b) is represented by $r = \sqrt{a^2 + b^2}$ and angle ψ satisfying $a = r \cos \psi$, $b = r \sin \psi$ with the level-appropriate quadrant convention. Starting from the top radius, recursively apply this inverse map to recover lower-level radii and finally the original coordinate pairs. If a pair has zero radius, its angle is irrelevant; fixing a deterministic convention yields uniqueness of the reconstructed vector. $\square$

Lemma 12.2 (Gaussian preconditioning gives predictable radii). *Let $S \in \mathbb{R}^{m \times d}$ have i.i.d. $\mathcal{N}(0, 1)$ entries. For fixed $x \in \mathbb{R}^d$, $Sx \sim \mathcal{N}(0, \|x\|_2^2 I_m)$.*

Proof. The i th coordinate of Sx is $\sum_j S_{ij}x_j$, a linear combination of independent centered Gaussians. Hence it is Gaussian with mean zero and variance $\sum_j x_j^2 = \|x\|_2^2$. Distinct rows of S are independent, so the coordinates are independent. Therefore the covariance matrix is $\|x\|_2^2 I_m$. $\square$

Proposition 12.3 (Angle concentration heuristic). *After random preconditioning, recursive polar angles at higher levels concentrate around $\pi/4$ because they compare norms of two independent high-dimensional Gaussian subvectors of equal dimension.*

Proof. At a higher recursive level, an angle has form

$$\psi = \tan^{-1} \left(\frac{R_2}{R_1} \right), \quad (12.3)$$

where R_1 and R_2 are norms of independent Gaussian subvectors of the same dimension m . Each R_i^2 is chi-square distributed up to scale, with mean proportional to m and variance proportional to m . Thus $R_i/\sqrt{m}$ concentrates around the same constant as m grows. Consequently R_2/R_1 concentrates around 1, and ψ concentrates around $\tan^{-1}(1) = \pi/4$. PolarQuant formalizes this distribution and uses it for codebook design [41]. $\square$

12.3 Polar ring cache

Definition 12.4 (Polar ring cache). For each ring block B_r , head h , and layer ℓ , store quantized polar representations

$$\text{PQ}(K_{\ell h, B_r}), \quad \text{PQ}(V_{\ell h, B_r}) \quad (12.4)$$

instead of full-precision K, V . During ring traversal, a block is dequantized locally or fused into a kernel that computes $Q\hat{K}^\top$ and attention-value products without materializing full $\hat{K}, \hat{V}$ globally.

Lemma 12.5 (Score perturbation from quantized keys). *Assume $\|q_i\|_2 \leq R_Q$ for every query and $\|k_j - \hat{k}_j\|_2 \leq \epsilon_K$ for every key. Then*

$$\|S - \hat{S}\|_\infty \leq \frac{R_Q \epsilon_K}{\sqrt{d_h}}. \quad (12.5)$$

Proof. For every pair (i, j) ,

$$|S_{ij} - \hat{S}_{ij}| = \frac{1}{\sqrt{d_h}} |q_i^\top (k_j - \hat{k}_j)| \leq \frac{1}{\sqrt{d_h}} \|q_i\|_2 \|k_j - \hat{k}_j\|_2 \leq \frac{R_Q \epsilon_K}{\sqrt{d_h}}, \quad (12.6)$$

by Cauchy-Schwarz. $\square$

PolarQuant-style cache interleaved with ring attention

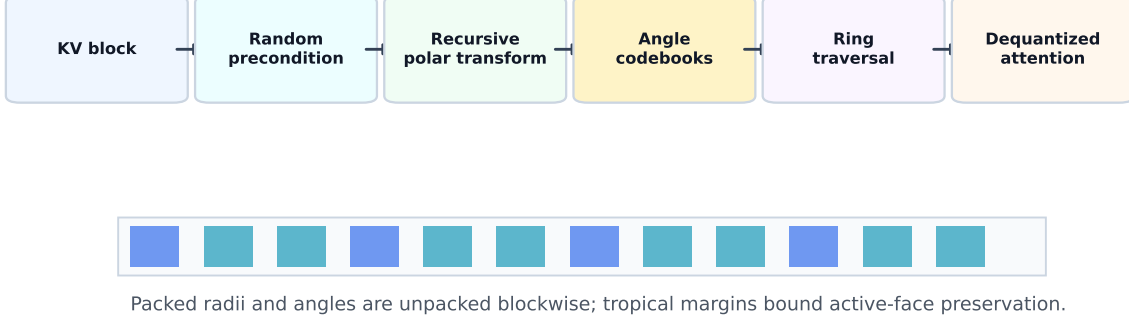


Figure 8: PolarQuant interleaving with ring attention. Each key-value block is randomly preconditioned, recursively transformed to polar coordinates, angle-quantized, packed, and dequantized only when the block reaches a query device.

Theorem 12.6 (Tropical output stability under PolarQuant cache). *Assume key and value dequantization errors obey*

$$\left\|k_j - \hat{k}_j\right\|_2 \leq \epsilon_K, \quad \left\|v_j - \hat{v}_j\right\|_\infty \leq \epsilon_V, \quad (12.7)$$

and $\|q_i\|_2 \leq R_Q$. Then tropical attention with dequantized PolarQuant cache satisfies

$$\left\|Y - \hat{Y}\right\|_\infty \leq \frac{R_Q \epsilon_K}{\sqrt{d_h}} + \epsilon_V. \quad (12.8)$$

If the full-precision tropical margin is larger than twice this bound, the active key is unchanged.

Proof. The previous lemma bounds score perturbation by $\epsilon_S = R_Q \epsilon_K / \sqrt{d_h}$. Value perturbation is bounded by ϵ_V . Apply the Lipschitz and argmax-stability lemma for tropical attention. $\square$

Proposition 12.7 (Equivariance of a shared PolarQuant cache). *If the random preconditioner, codebooks, and quantization rules are shared over token rows and ring blocks, and block schedules are label-independent or transformed consistently, then PolarQuant-dequantized ring attention remains graph equivariant up to numerical quantization error.*

Proof. The preconditioner and quantizer act identically on every key/value row. Therefore quantizing after a row permutation gives the same packed rows in permuted order, modulo deterministic tie-breaking. Ring traversal is a schedule; if it is label-independent or permuted with the tokens, it does not introduce semantic label dependence. Dequantized attention is equivariant by the attention equivariance proof, with values replaced by their quantized approximations. The only deviation from full-precision equivariance comes from finite-precision quantization and tie-breaking. $\square$

12.4 Memory accounting

Let B_{fp} be bits per full-precision coordinate, typically 16 for bf16/fp16 KV caches. If a polar cache stores one radius using B_r bits and angle level ℓ uses b_ℓ bits per angle, then amortized bits per coordinate are approximately

$$B_{\text{polar}} \approx \frac{B_r + \sum_{\ell=1}^{\log_2 d_h} (d_h/2^\ell) b_\ell}{d_h} + B_{\text{overhead}}, \quad (12.9)$$

where B_{overhead} accounts for packed-index alignment and amortized codebook storage. The compression ratio is

$$\rho_{\text{cache}} \approx \frac{B_{\text{fp}}}{B_{\text{polar}}}. \quad (12.10)$$

Because codebooks are shared and preconditioning avoids per-block scale/zero-point storage, the overhead can be lower than blockwise affine quantization.

13 Soft-MoE ToricGT blocks

13.1 Motivation and placement

Soft-MoE is useful for ToricGT for a different reason than ordinary large-scale MoE. The goal is not merely to increase parameter count. The goal is to allocate typed computation to different graph-token roles without hard token dropping or brittle top- k routing. In a ToricGT block, experts may specialize as generic feed-forward maps, tropical dynamic-programming gates, toric phase maps, Hebrew root-template analyzers, local proof verifiers, or graph-decoder refiners. Because Soft-MoE computes differentiable weighted mixtures rather than discrete assignments, the routing map remains smooth and can be made permutation equivariant.

Puigcerver, Riquelme, Mustafa, and Houlsby define Soft-MoE as a fully differentiable MoE mechanism where each expert slot receives a weighted average of all input tokens and the output tokens are reconstructed as weighted averages of the expert outputs [37]. The public PyTorch implementation referenced for this project exposes a `SoftMoE` layer with arguments such as `in_features`, `out_features`, `num_experts`, and `slots_per_expert` [40]. ToricGT uses that mechanism as a graph-token feed-forward replacement, not as a black-box vision-only module.

13.2 Equations

Let $X \in \mathbb{R}^{B \times L \times d}$ be a batch of graph-token hidden states and let $M \in \{0, 1\}^{B \times L}$ be the validity mask. A Soft-MoE layer has E experts and S slots per expert. Let $\Phi \in \mathbb{R}^{d \times E \times S}$ be learned slot vectors and let $g > 0$ be a learned temperature. Use normalized vectors

$$\bar{x}_{bi} = \frac{x_{bi}}{\|x_{bi}\|_2 + \epsilon}, \quad \bar{\phi}_{es} = \frac{\phi_{es}}{\|\phi_{es}\|_2 + \epsilon}, \quad (13.1)$$


and define token-slot logits

$$A_{bies} = g \langle \bar{x}_{bi}, \bar{\phi}_{es} \rangle. \quad (13.2)$$

Invalid tokens are removed by setting $A_{bies} = -\infty$ whenever $M_{bi} = 0$. Dispatch weights normalize over tokens for each slot:

$$D_{bies} = \frac{\exp(A_{bies}) M_{bi}}{\sum_{j=1}^L \exp(A_{bj es}) M_{bj} + \epsilon}. \quad (13.3)$$

Default 4-expert Soft-MoE graph-token block

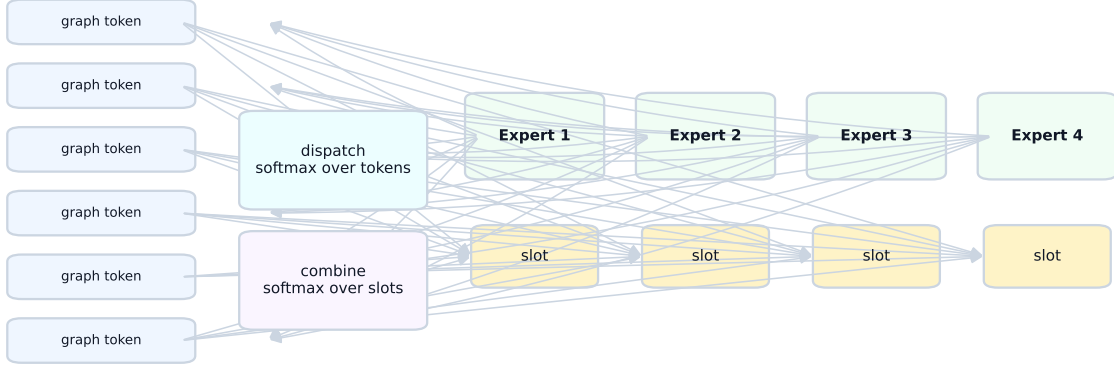

Shared routing preserves permutation equivariance; diagnostics report expert mass and slot entropy.

Figure 9: Soft-MoE ToricGT block. Graph tokens are softly dispatched into slot mixtures, typed experts process the slots, and combine weights project expert outputs back to the original token stream. The same equations handle node, edge, proof, Hebrew, tropical, and toric tokens when masks and type channels are equivariant.

Combine weights normalize over slots for each token:

$$C_{bies} = \frac{\exp(A_{bies})}{\sum_{e'=1}^E \sum_{s'=1}^S \exp(A_{bie's'}) + \epsilon}. \quad (13.4)$$

The input slot for expert e and slot s is

$$Z_{bes} = \sum_{i=1}^L D_{bies} X_{bi}. \quad (13.5)$$

Each expert $f_e : \mathbb{R}^d \rightarrow \mathbb{R}^d$ processes its slots:

$$\tilde{Z}_{bes} = f_e(Z_{bes}). \quad (13.6)$$

The output token is reconstructed by

$$Y_{bi} = \sum_{e=1}^E \sum_{s=1}^S C_{bies} \tilde{Z}_{bes}. \quad (13.7)$$

A residual gate $\alpha_\ell \in [0, 1]$ is used in practice:

$$X_{\ell+1} = X_\ell + \alpha_\ell \text{Dropout}(Y_\ell), \quad \alpha_\ell \text{ initialized near } 0.05 \text{ or } 0.1. \quad (13.8)$$

This conservative initialization prevents the expert bank from dominating early training before the graph-token features have useful semantics.

Lemma 13.1 (Soft-MoE graph-token equivariance). *Let P be a token permutation matrix that preserves the validity mask by $M(PX) = PM(X)$. Suppose Φ , the experts f_e , and the temperature g are shared across token rows and do not depend on absolute token indices. Then*

$$\text{SoftMoE}(PX, PM) = P \text{SoftMoE}(X, M). \quad (13.9)$$

Proof. The logits satisfy

$$A(PX)_{ies} = A(X)_{\pi^{-1}i,e,s}. \quad (13.10)$$

The dispatch denominator for a fixed (e, s) sums over all valid tokens, so it is invariant under reindexing. Therefore

$$D(PX)_{ies} = D(X)_{\pi^{-1}i,e,s}. \quad (13.11)$$

The slot mixture is unchanged:

$$\begin{aligned} Z(PX)_{es} &= \sum_i D(PX)_{ies} (PX)_i = \sum_i D(X)_{\pi^{-1}i,e,s} X_{\pi^{-1}i} \\ &= \sum_j D(X)_{jes} X_j = Z(X)_{es}. \end{aligned} \quad (13.12)$$

Thus expert outputs $\tilde{Z}_{es}$ are unchanged. The combine weights satisfy $C(PX)_{ies} = C(X)_{\pi^{-1}i,e,s}$ because their denominator normalizes only over slots for the same token. Hence

$$Y(PX)_i = \sum_{e,s} C(X)_{\pi^{-1}i,e,s} \tilde{Z}_{es} = Y(X)_{\pi^{-1}i}, \quad (13.13)$$

which is exactly $PY(X)$. □

Proposition 13.2 (Soft-MoE preserves TokenGT equivariance). *Replacing any shared token-wise feed-forward block of an equivariant ToricGT layer by the Soft-MoE block above preserves graph-to-graph equivariance.*

Proof. The surrounding attention, normalization, residual, and decoder maps are equivariant by earlier results. The Soft-MoE block is equivariant by the preceding lemma. Compositions and residual sums of equivariant maps are equivariant. □

13.3 Typed expert bank for ToricGT

For the full 8M-35M graph-reasoning model, use a small typed bank rather than hundreds of experts.

Expert	Function	Practical notes
Generic MLP	ordinary dense nonlinear map	always present; fallback for arbitrary continuous approximation
Tropical DP	max/min-plus candidate scoring and margin features	use for shortest path, Viterbi, active-face, and transitive-closure tasks
Toric phase	clock/shift/cocycle channels and phase normalization	regularize lightly; avoid forcing phase structure on arbitrary data

Expert	Function	Practical notes
Hebrew root	radical alignment, template/binyan features, paradigm consistency	useful only for Hebrew or Semitic morphology batches; can be gated by type embeddings
Proof verifier	local step validity and dependency consistency	attach to equation/proof-obligation nodes
Graph decoder	node/edge graph-to-graph refinement	useful near output layers

Recommended defaults are $E = 4\text{--}8$ experts, $S = 1\text{--}4$ slots per expert, g initialized near 1, and Soft-MoE enabled by default in the upper half of the network. For $L \leq 2048$, $ES \leq 32$ is normally safe on a 4090. For longer graph traces, use chunked dispatch: compute A blockwise over tokens, accumulate dispatch denominators by log-sum-exp, then form slots in a second streaming pass. This keeps the slot computation compatible with ring attention.

13.4 Implementation details

A minimal PyTorch implementation for graph tokens has the following shape discipline.

```
# X: [B, L, d], mask: [B, L]
Xn = l2_normalize(X, dim=-1)
Pn = l2_normalize(Phi, dim=0) # [d, E, S]
logits = scale * torch.einsum('bld,des->bles', Xn, Pn)
logits = logits.masked_fill(~mask[:, :, None, None], -torch.inf)
D = torch.softmax(logits, dim=1) # dispatch over tokens
C = torch.softmax(logits.flatten(2), dim=-1).view(B, L, E, S)
slots = torch.einsum('bld,bles->besd', X, D)
out_slots = stack([experts[e](slots[:, e]) for e in range(E)], dim=1)
Y = torch.einsum('besd,bles->bld', out_slots, C)
X = X + residual_gate * dropout(Y)
```

The implementation should explicitly test: output shape, mask handling, gradient finiteness, deterministic behavior under token permutation, absence of NaNs when all tokens of a batch element are padded, and agreement between chunked and unchunked dispatch within numerical tolerance.

13.5 Prefix-causal Soft-MoE for language-model scoring

The graph-to-graph ToricGT encoder is allowed to use bidirectional graph context. The Parameter-Golf micro language model is not. A direct Soft-MoE implementation that dispatches each expert slot using all tokens in a sequence is noncausal: the slot representation for position t would include future tokens $x_{>t}$ and would therefore leak validation information. The contest-facing model must use a prefix-causal version of Soft-MoE whenever the output at token t is scored autoregressively.

Flatten the expert and slot indices into $s \in \{1, \dots, ES\}$ and let a_{ts} be the token-slot logit. For

an autoregressive sequence $x_1, \dots, x_T$, define strict-prefix dispatch accumulators

$$N_s^{(t)} = \sum_{m < t} \exp(a_{ms}) x_m, \quad (13.14)$$

$$R_s^{(t)} = \sum_{m < t} \exp(a_{ms}), \quad (13.15)$$

$$Z_s^{(t)} = \frac{N_s^{(t)}}{R_s^{(t)} + \epsilon}. \quad (13.16)$$

The expert output available at position t is

$$\tilde{Z}_s^{(t)} = f_{e(s)}(Z_s^{(t)}), \quad (13.17)$$

and the causal combine weights are normalized only over slots for the current token,

$$C_{ts} = \frac{\exp(a_{ts})}{\sum_{u=1}^{ES} \exp(a_{tu}) + \epsilon}. \quad (13.18)$$

The Soft-MoE residual used to predict token x_{t+1} is then

$$y_t = \sum_{s=1}^{ES} C_{ts} \tilde{Z}_s^{(t)}. \quad (13.19)$$

After the loss for position t has been computed, the accumulators may be updated by

$$N_s^{(t+1)} = N_s^{(t)} + \exp(a_{ts}) x_t, \quad (13.20)$$

$$R_s^{(t+1)} = R_s^{(t)} + \exp(a_{ts}). \quad (13.21)$$

This is a score-before-update rule. It is the Soft-MoE analogue of ordinary causal attention: the current prediction can use only the strict prefix.

Lemma 13.3 (Prefix-causal Soft-MoE is valid for autoregressive BPB). *For every position t , the output y_t of the prefix-causal Soft-MoE block is a measurable function of $x_{<t}$, the current unscored embedding used to choose a distribution over x_t only when that embedding itself is derived from $x_{<t}$, and the fixed model parameters. In particular, if the surrounding attention and embedding pipeline is causal, replacing a dense feed-forward block by prefix-causal Soft-MoE preserves strict left-to-right scoring.*

Proof. By construction, $N_s^{(t)}$ and $R_s^{(t)}$ are sums over indices $m < t$. Therefore $Z_s^{(t)}$ and $\tilde{Z}_s^{(t)}$ are functions only of the strict prefix and the parameters of f_e . The combine weights C_{ts} may depend on the hidden state at t , but in a causal language model that hidden state is produced from the same strict prefix. Hence y_t is a function of the strict prefix. The update with x_t occurs only after scoring position t , so no scored probability can depend on its own target or on future targets. $\square$

A vectorized training implementation can compute these quantities by prefix scans. In PyTorch, the noncausal dispatch

```
D = softmax(logits, dim=1)          # invalid for LM scoring if dim=1 sees future
slots = einsum('bld,bles->besd', X, D)
```

should be replaced in the contest model by cumulative sums over time:

```
w = torch.exp(logits.flatten(2)).clamp_max(1e4)          # [B, T, ES]
prefix_num = torch.cumsum(w[..., None] * X[:, :, None, :], dim=1)
prefix_den = torch.cumsum(w, dim=1)
# strict prefix: shift right before forming slots
N = torch.cat([zeros_like(prefix_num[:, :1]), prefix_num[:, :-1]], dim=1)
R = torch.cat([zeros_like(prefix_den[:, :1]), prefix_den[:, :-1]], dim=1)
slots_t = N / (R[..., None] + eps)                      # [B, T, ES, d]
out_slots_t = experts(slots_t)
C = torch.softmax(logits.flatten(2), dim=-1)
Y = torch.einsum('bts,btsd->btd', C, out_slots_t)
```

For the graph-reasoning encoder this causal restriction is unnecessary; for the Parameter-Golf track it is mandatory.

13.6 Soft-MoE regularizers and diagnostics

Soft-MoE should be monitored rather than trusted. Define expert combine mass

$$m_e = \frac{1}{BL} \sum_{b,i,s} C_{bies}, \quad (13.22)$$

slot dispatch entropy

$$H_{es}^D = - \sum_i D_{bies} \log(D_{bies} + \epsilon), \quad (13.23)$$

and token combine entropy

$$H_i^C = - \sum_{e,s} C_{bies} \log(C_{bies} + \epsilon). \quad (13.24)$$

A light usage regularizer is

$$\mathcal{L}_{\text{moe}} = \lambda_{\text{bal}} \sum_e \left(m_e - \frac{1}{E} \right)^2 - \lambda_D \mathbb{E}[H^D] + \lambda_C \mathbb{E}[\max(0, H^C - H_{\text{max}})]. \quad (13.25)$$


The sign convention encourages noncollapsed dispatch while allowing combine weights to become sharp only when the task supports specialization. Do not over-regularize m_e on mixed-domain batches: if a batch contains only Hebrew morphology, the Hebrew-root expert should be allowed to receive more mass.

14 Parameter-Golf constrained ToricGT

14.1 Contest constraints as engineering axioms

The OpenAI Model Craft Challenge: Parameter Golf asks participants to train the best language model that fits in a self-contained 16,000,000 byte artifact, trains in roughly ten minutes on the prescribed 8xH100 evaluation setting, and is scored by tokenizer-agnostic bits per byte on FineWeb validation data [38]. The ToricGT implementation should track both the official repository and the working fork used for this project [39]. The important engineering point is that the counted artifact is not a vague parameter count: it is the serialized code, compressed model state, tokenizer or byte

Parameter-Golf compression track

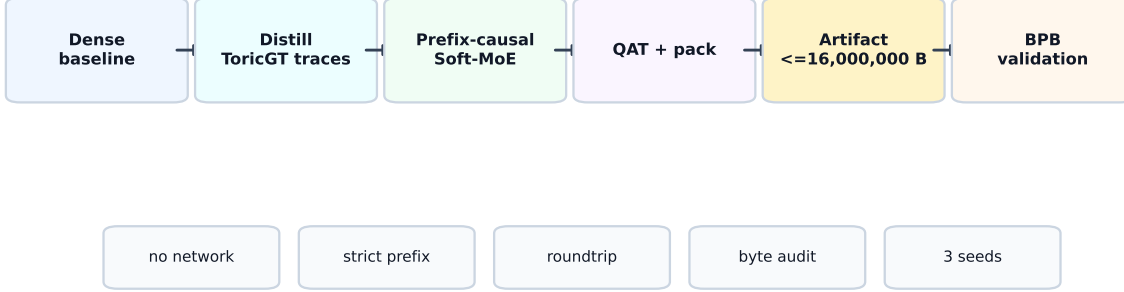

The contest LM is a separate deployment artifact; the full ToricGT graph model is the teacher and diagnostic scaffold.

Figure 10: Parameter-Golf protocol for ToricGT. The full graph-to-graph model remains the research model. The contest-facing model is a micro language model distilled from graph-reasoning traces, equipped with byte-safe Soft-MoE adapters, trained under the wallclock budget, and exported as a single self-contained artifact with exact byte accounting and prequential BPB validation.

model, and metadata that the evaluator receives. The contest setting also requires evaluation to be self-contained, with no network calls, no external downloads, no hidden validation side information, and no dependence on a training dataset at evaluation time [38]. Record-style submissions should include a runnable `train_gpt.py`, `README`, `submission.json`, training logs from independent runs, and exact byte accounting. SOTA claims require a statistically meaningful improvement over the current record, so a ToricGT-derived submission must be treated as an auditable compression experiment rather than an informal model sketch. The working fork used for ToricGT experimentation is treated as the project-local contest scaffold, while the official OpenAI repository remains the normative source for rules and compliance checks [39].

Definition 14.1 (Parameter-Golf artifact budget). Let

$$B_{\text{art}} = B_{\text{code}} + B_{\text{weights}} + B_{\text{tokenizer}} + B_{\text{metadata}}. \quad (14.1)$$

A Parameter-Golf-compliant artifact must satisfy

$$B_{\text{art}} \leq 16,000,000. \quad (14.2)$$

For a model with tensors W_r quantized to b_r bits per scalar and entropy-compressed by factor $\rho_r \geq 1$,

$$B_{\text{weights}} \approx \sum_r \frac{b_r |W_r|}{8\rho_r} + B_{\text{packing}}. \quad (14.3)$$

The contest objective can be written as

$$\min_{\theta, \mathcal{C}} \text{BPB}_{\text{FineWeb}}(q_{\theta, \mathcal{C}}) \quad \text{subject to} \quad B_{\text{art}} \leq 16,000,000, \quad (14.4)$$

where $\mathcal{C}$ denotes the compression/export scheme and

$$\text{BPB}(q) = -\frac{1}{N_{\text{bytes}}} \sum_t \log_2 q(b_t \mid b_{<t}). \quad (14.5)$$

This formula is tokenizer-agnostic because the denominator is bytes, not tokens.

14.2 Prequential BPB validity

Parameter Golf scoring is best viewed as a prequential compression game. The model emits a full normalized predictive distribution, pays log loss on the next symbol, and only then may update any legal online state. Let the validation byte stream be $b_1, \dots, b_T$ and let $\ell(t)$ be the exact number of bytes represented by the tokenizer symbol scored at step t . A scoring procedure is valid if it satisfies four conditions:

1. **strict prefix dependence:** q_t depends only on $b_{<t}$, fixed parameters, and legal online state derived from already scored bytes;
2. **full normalization:** q_t is a normalized distribution over the next scored symbol;
3. **score before update:** the state update using b_t occurs after $-\log q_t(b_t)$ is recorded;
4. **single validation pass:** the validation stream is not permuted, repeated for tuning, or searched over by seeds.

Under these conditions the reported objective is

$$\text{BPB}_{\text{valid}} = \frac{\sum_{t=1}^T -\log_2 q_t(b_t \mid b_{<t})}{\sum_{t=1}^T \ell(t)}. \quad (14.6)$$

Proposition 14.2 (Score-before-update prevents validation leakage). *Assume q_t satisfies strict prefix dependence and the online state update has the form $s_{t+1} = U(s_t, b_t)$ after the loss term at t is recorded. Then the cumulative validation loss is a proper left-to-right log score and no term in the sum can depend on future validation bytes.*

Proof. We prove by induction that s_t is a function only of $b_{<t}$ and fixed parameters. The base state s_1 is fixed. If s_t is a function only of $b_{<t}$, then q_t is also a function only of $b_{<t}$ by strict prefix dependence. The loss term $-\log q_t(b_t)$ is therefore scored before any access to $b_{>t}$. The update $s_{t+1} = U(s_t, b_t)$ is then a function only of $b_{\leq t}$, closing the induction. Thus no loss term uses future information. $\square$

14.3 Random-order graph autoregressive projection

The contest-facing implementation uses a graph-to-sequence projection rather than replacing the ToricGT theory. A byte chunk $b = (b_1, \dots, b_T)$ is viewed as a path graph whose nodes are byte positions. For every chunk, sample a content-independent permutation

$$\pi = \pi(s, \text{id}, r, T) \in S_T \quad (14.7)$$

from a base seed s , a public sample id, a pass id r , and the length T . The randomized autoregressive factorization is

$$q_\theta(b \mid \pi) = \prod_{k=1}^T q_\theta(b_{\pi_k} \mid b_{\pi_1}, \dots, b_{\pi_{k-1}}, \pi_1, \dots, \pi_k). \quad (14.8)$$

The row scored at step k contains the previous revealed byte, the current target position π_k , fixed toric phase features of π_k , and causal access only to rows $< k$. It does not contain b_{π_k} .

Lemma 14.3 (Content-independent random order is score-valid). *If π is sampled independently of the unscored byte values and the model row for step k is a measurable function only of $(b_{\pi_1}, \dots, b_{\pi_{k-1}}, \pi_1, \dots, \pi_k)$ and fixed parameters, then every loss term*

$$-\log q_\theta(b_{\pi_k} \mid b_{\pi_{<k}}, \pi_{\leq k}) \quad (14.9)$$

is score-before-update valid.

Proof. Induct on k . Before step 1, only the permutation, BOS symbol, and fixed parameters are known. Assume before step k that the online state is a function only of already scored bytes $b_{\pi_{<k}}$ and the public order prefix $\pi_{\leq k}$. The predictive distribution for b_{π_k} is computed from exactly those quantities. The byte b_{π_k} is inserted into the state only after its log score is recorded. Since π is independent of unscored byte values, the order itself cannot encode future validation information. $\square$

14.4 Byte-scored TokenGT hybrid graph loss

The official Parameter-Golf score should not be replaced by graph-token bits-per-token. The hybrid implementation instead treats the random-order hidden states as a TokenGT-style graph while preserving byte logits. For reveal state h_i and original byte position $p_i = \pi_i$, define local path-neighborhood labels

$$A_{ij} = \mathbf{1}\{0 < |p_i - p_j| \leq r\}. \quad (14.10)$$

If the source has a trustworthy causal orientation, use $E_{ij} = A_{ij}\mathbf{1}\{i < j\}$. If the source is cyclic, undirected, or otherwise noncausal, use $E_{ij} = A_{ij}$ and set the direction and cycle weights to zero. With normalized hidden states $\bar{h}_i$, temperature τ , coarse byte-class agreement C_{ij} , and toric phase map ϕ , the training-only graph objective is

$$\mathcal{L}_{\text{ByteTokenGT}} = a_e \text{BCE}(\langle \bar{h}_i, \bar{h}_j \rangle / \tau, E_{ij}) + a_p \text{SmoothL1}(d_h(i, j), \log(1 + |p_i - p_j|)) \quad (14.11)$$

$$+ a_c \text{BCE}(\langle \bar{h}_i, \bar{h}_j \rangle / \tau, C_{ij}) + a_d \mathbb{E}_{i \rightarrow j} \max(0, m - \cos(h_j - h_i, \phi(p_j) - \phi(p_i)))^2 \quad (14.12)$$

$$+ a_{\text{cyc}} \mathbb{E}_{i > j, A_{ij}=1} \sigma(\langle \bar{h}_i, \bar{h}_j \rangle / \tau). \quad (14.13)$$

The total hybrid loss adds $\lambda_{\text{ByteTokenGT}} \mathcal{L}_{\text{ByteTokenGT}}$ to byte CE, GFlowNet trajectory balance, GraphCG disentanglement, toric geometry, BGG, Koszul, Slepian–Pollak, and memory losses. Thus FineWeb examples are graph-structured as path graphs, graph-of-thought examples may add richer structure, and official BPB remains the byte-denominated prequential log score. The current byte-accounted hybrid config uses $d = 448$, 8 heads, seven stored dense blocks, and two recurrent passes; its 6-bit row-quantized LZMA artifact probe is 15,206,131 bytes, leaving 793,869 bytes below the 16,000,000 byte cap.

14.5 Byte-safe embedding-space GFlowNet actions

The full ToricGT graph model uses an embedding-space GFlowNet over graph-of-thought states. The Parameter-Golf adapter uses the score-valid subset of the same idea. Let h_k be the hidden state at random-order step k , computed from $(b_{\pi_{<k}}, \pi_{\leq k})$. A small policy head produces

$$p_\psi(a \mid h_k) = \text{softmax}(W_2 \sigma(W_1 \text{LN}(h_k)))_a, \quad a \in \{1, \dots, A\}. \quad (14.14)$$

Each action has an embedding $u_a \in \mathbb{R}^d$, and the byte predictor uses

$$\tilde{h}_k = h_k + \alpha u_{a_k}, \quad q_\theta(b_{\pi_k} \mid b_{\pi_{<k}}, \pi_{\leq k}, a_k) = \text{softmax}(E\tilde{h}_k + c). \quad (14.15)$$

At evaluation, multiple action trajectories may be averaged by the legal mixture

$$q_\theta^{(M)}(b_{\pi_k} \mid \mathcal{F}_k) = \frac{1}{M} \sum_{m=1}^M q_\theta(b_{\pi_k} \mid \mathcal{F}_k, a_k^{(m)}), \quad a_k^{(m)} \sim p_\psi(\cdot \mid h_k), \quad (14.16)$$

where $\mathcal{F}_k$ is the prefix sigma-field generated by already scored bytes and public order information. A lightweight trajectory-balance surrogate uses the detached next-byte log likelihood as a local reward proxy:

$$\mathcal{L}_{\text{PG-GFN}} = \mathbb{E}_k \left(\log Z_\psi + \log p_\psi(a_k \mid h_k) + \text{CE}_k^{\text{stop}} \right)^2 - \lambda_H \mathbb{E}_k H(p_\psi(\cdot \mid h_k)). \quad (14.17)$$

This is not a substitute for the full graph GFlowNet objective; it is a compact, byte-accounted way to let the contest model explore latent graph-of-thought refinements at training and inference time.

Lemma 14.4 (GFlowNet action scaling is score-valid). *If h_k is $\mathcal{F}_k$ -measurable and a_k is sampled from $p_\psi(\cdot \mid h_k)$ before observing b_{π_k} , then scoring with $q_\theta(\cdot \mid \mathcal{F}_k, a_k)$ and updating state after the score preserves prequential validity.*

Proof. The sampled action is a randomized function of h_k and independent sampler noise. Since h_k is $\mathcal{F}_k$ -measurable, the pair (h_k, a_k) is measurable with respect to $\mathcal{F}_k$ augmented by legal internal randomness. The distribution $q_\theta(\cdot \mid \mathcal{F}_k, a_k)$ is therefore fixed before b_{π_k} is read. The update including b_{π_k} occurs after recording the log score, so the score-before-update induction remains unchanged. $\square$

14.6 Relative Kolmogorov diagnostics and analogical helper transfer

The competition objective is BPB, but BPB alone does not reveal whether a small model has learned reusable reasoning programs. ToricGT therefore reports compressor-tagged conditional-complexity proxies. For a compressor c , define

$$\hat{K}_c(s) = |c(s)|, \quad \hat{K}_c(y \mid x) = \max\{0, \hat{K}_c(x\|y) - \hat{K}_c(x)\}. \quad (14.18)$$

This is not true Kolmogorov complexity, which is uncomputable; it is an auditable estimator whose compressor and helper context are always named. The underlying ideal quantities are the conditional complexities

$$K_U(y \mid x) = \min\{|p| : U(p, x) = y\}, \quad K_U(x \mid y) = \min\{|p| : U(p, y) = x\}, \quad (14.19)$$

for a fixed universal machine U . Up to the invariance constant, these measure how much extra program information is needed to reconstruct one object from the other. The two directions matter. In ToricGT, x is usually a problem, graph prefix, or helper trajectory, while y is a target answer, future byte block, or reasoning trace; $K(y \mid x)$ measures forward reasoning economy, whereas $K(x \mid y)$ measures how much of the original problem structure is recoverable from the proposed solution. A short answer with low $K(y \mid x)$ but high $K(x \mid y)$ can be an overcompressed guess rather than a faithful solution.

For diagnostics that allow signed improvement over the best direct helper, ToricGT also logs

$$\tilde{K}_c(y \mid x; h_0) = \hat{K}_c(h_0\|y) - \hat{K}_c(h_0) - \hat{K}_c(y \mid x), \quad (14.20)$$

where h_0 is a named baseline helper such as the strict prefix or shortest-known direct program proxy. Negative values mean that the new helper encoded y more compactly than the baseline proxy. These signed values are never interpreted as negative true Kolmogorov complexity; they are relative compression gains.

For random-order autoregression, the helper object is structured. At random-order step k , the direct helper family is

$$H_k = \{b_{\pi_{<k}}, \pi, \text{chunk}(b), a_{<k}, G_k, T_k\}, \quad (14.21)$$

where $b_{\pi_{<k}}$ is the strict prefix, π is the public permutation or tree-order program, $\text{chunk}(b)$ is the original graph-projected byte chunk, $a_{<k}$ is the prefix-visible GFlowNet action trace when active, and G_k, T_k are optional serialized graph and tree helper payloads. The reported shortest-known program proxy is

$$\hat{K}_c(y_k | H_k) = \min_{h \in H_k \cup \{\emptyset\}} \hat{K}_c(y_k | h). \quad (14.22)$$

This construction interacts correctly with random-order decoding: the public order program and strict prefix are available before scoring, while the target byte is not.

Analogical reasoning supplies additional helper objects. Given a source pair (x_s, y_s) and target pair (x_t, y_t) , plus optional source graph/tree serializations (G_s, T_s) , define the transfer residual

$$\Delta K_c^{\text{ana}} = \hat{K}_c(y_t | H_t, x_s, y_s, G_s, T_s) - \hat{K}_c(y_t | H_t). \quad (14.23)$$

Negative ΔK_c^{ana} means the analogy shortened the estimated program for the target. The implementation logs both this signed residual and the clipped gain $\max(0, -\Delta K_c^{\text{ana}})$. Prediction-side rewards are multiplied by a correctness gate, preventing a short but wrong prediction from receiving a positive complexity reward.

Finally, the suite records a symmetry-of-information residual

$$S_c(x, y) = \left| (\hat{K}_c(x) - \hat{K}_c(x | y)) - (\hat{K}_c(y) - \hat{K}_c(y | x)) \right|. \quad (14.24)$$

This mirrors the algorithmic-information identity $K(x) - K(x | y) \approx K(y) - K(y | x)$ up to logarithmic and machine-dependent terms. Large S_c indicates that the chosen compressor/helper encoding may be asymmetric for the domain at hand, or that the model’s prediction preserved one direction of the relation while losing the other. In the current branch these quantities are diagnostics and checkpoint-selection aids, not replacements for the BPB objective. They interact with random-order autoregression only through score-valid helpers: at position k , the order program π , strict prefix $b_{\pi_{<k}}$, prefix-visible GFlowNet actions, and previously generated graph/tree helpers may condition the proxy, while the target byte b_{π_k} and future bytes may not.

14.7 GraphCG bases and directed topological analogies

The competition branch adds an auxiliary geometric training signal, but the two source ideas play different roles. GraphCG learns steerable latent factors by contrasting edits along learned directions and suppressing cross-direction entanglement [8]. ToricGT uses this as a compact concept chart for hidden states, not as a separate graph generator in the exported artifact. The analogical-reasoning paper studies a different mechanism: relational structures align in embedding space, measured by decreasing Dirichlet energy, and Transformer layers apply a functor-like residual map from a source structure to a target structure [9]. ToricGT composes these mechanisms: GraphCG supplies the coordinates, while analogical maps act between filtered directed complexes built over those coordinates. The signal is deliberately auxiliary. It does not replace BPB, and its weights are phased in only after the early byte compressor has a stable negative slope.

Let $B = [d_1, \dots, d_r] \in \mathbb{R}^{d \times r}$ be the learned GraphCG chart with approximately orthonormal columns. For a prefix-visible hidden state $h_t \in \mathbb{R}^d$, define chart coordinates $\xi_t = B^\top h_t$. For a short stride s , define a normalized chart relation arrow

$$a_t = \frac{\xi_{t+s} - \xi_t}{\|\xi_{t+s} - \xi_t\|_2 + \epsilon}. \quad (14.25)$$

Coarse byte-relation classes are obtained from source and target byte classes: for example digit-to-digit, lowercase-to-punctuation, or Hebrew-byte-to-Hebrew-byte. If two arrows belong to the same class, they should represent the same abstract operation up to local context. The GraphCG-style contrastive loss edits hidden states along chart axes and asks the edited direction to remain identifiable:

$$\mathcal{L}_{\text{GCG}} = \text{CE} \left(\frac{\langle \text{norm}(h + \alpha d_i), \text{norm}(h + 2\alpha d_j) \rangle}{T}, i \right) + \lambda_\perp \|B^\top B - I\|_F^2 + \lambda_{\text{cov}} \|\text{Corr}(HB) - I\|_F^2. \quad (14.26)$$

This gives an identifiable basis for concept-like coordinates. The reason this matters for ToricGT is geometric. Tropical and toric probes do not merely read a hidden vector; they cut hidden space into polyhedral chambers. If a tropical probe has candidate slopes a_r and biases b_r , its active chamber in raw coordinates is

$$C_r = \{h : \langle a_r - a_s, h \rangle \geq b_s - b_r \text{ for all } s\}. \quad (14.27)$$

In the GraphCG chart $\xi = B^\top h$, the same chamber is pulled back to

$$C_r^B = \{\xi : \langle B^\top(a_r - a_s), \xi \rangle \geq b_s - b_r \text{ for all } s\}. \quad (14.28)$$

Thus GraphCG changes the coordinates in which Newton-normal fans are seen. A well-conditioned chart makes the active faces align with reusable concept axes; a poorly conditioned chart smears a single toric wall across many dense directions. This is why the implementation logs both GraphCG covariance/coherence metrics and toric fan occupancy/margins: the desired behavior is not an abstractly small auxiliary loss, but a sharper pullback fan with lower off-axis covariance and stable byte likelihood.

Proposition 14.5 (GraphCG chart pullback of toric fans). *Let $P = \text{Conv}\{a_1, \dots, a_R\} \subset \mathbb{R}^d$ be the Newton polytope of a tropical probe and let $\mathcal{N}(P)$ be its normal fan. If $B \in \mathbb{R}^{d \times r}$ has full column rank, then the chart map $\iota_B : \mathbb{R}^r \rightarrow \mathbb{R}^d$, $\iota_B(\xi) = B\xi$, pulls $\mathcal{N}(P)$ back to a polyhedral fan-like chamber decomposition of chart space with cones*

$$\iota_B^{-1}(N_F P) = \{\xi : B\xi \in N_F P\}, \quad (14.29)$$

where F ranges over faces of P . If $B^\top B \approx I$ and $\text{Corr}(HB) \approx I$ on hidden samples H , then distances to pulled-back walls are stable under small chart-coordinate perturbations up to the conditioning of B .

Proof. Each normal cone $N_F P$ is an intersection of finitely many linear halfspaces. The preimage of a linear halfspace under the linear map ι_B is again a linear halfspace in $\mathbb{R}^r$, so $\iota_B^{-1}(N_F P)$ is polyhedral. Intersections and common faces are preserved by preimage, giving a chamber decomposition of the chart image. Full column rank prevents collapse of chart directions. Approximate orthonormality bounds $\|B\xi - B\xi'\|_2$ above and below by constants close to $\|\xi - \xi'\|_2$, while low chart covariance keeps empirical hidden variation from concentrating on a small subset of axes. Therefore chart-space wall distances change continuously with controlled condition number. $\square$

An analogical functor loss reduces within-class variance of a_t , while a parallelogram loss penalizes failures of local closure:

$$\mathcal{L}_{\text{para}} = \mathbb{E} \|(\xi_{t+s} - \xi_t) + (\xi_{u+s} - \xi_u) - (\xi_{v+s} - \xi_v)\|_2^2 \quad (14.30)$$

over adjacent relation triples that share the same coarse arrow label. These terms encourage byte-level reasoning moves to become reusable lattice vectors in the GraphCG chart.

Definition 14.6 (Directed filtered analogy complex). Fix a relation class with arrows $a_1, \dots, a_m$. Let

$$d_{ij} = \frac{\|a_i - a_j\|_2}{\text{median}_{p < q} \|a_p - a_q\|_2 + \epsilon}. \quad (14.31)$$

For filtration radii $\rho_1 < \dots < \rho_L$, the symmetric soft Rips adjacency is

$$A_\ell(i, j) = \sigma\left(\frac{\rho_\ell - d_{ij}}{\tau}\right) (1 - \delta_{ij}). \quad (14.32)$$

Split each arrow into two channel blocks $a_i = (a_i^{(1)}, a_i^{(2)}, \dots)$ and define the antisymmetric toric skew form

$$\Omega_{ij} = \langle a_i^{(1)}, a_j^{(2)} \rangle - \langle a_i^{(2)}, a_j^{(1)} \rangle. \quad (14.33)$$

The directed noncommutative adjacency is

$$A_\ell^\rightarrow(i, j) = \sigma\left(\frac{\rho_\ell - d_{ij} + \gamma\Omega_{ij}}{\tau}\right) (1 - \delta_{ij}). \quad (14.34)$$

The collection $\{A_\ell, A_\ell^\rightarrow\}_{\ell=1}^L$ is the directed filtered analogy complex.

The persistent object behind this construction should be stated explicitly. In the hard-threshold limit, A_ℓ defines a Vietoris–Rips graph and hence a clique complex K_ℓ . Since $\rho_\ell \leq \rho_{\ell+1}$, the complexes are nested:

$$K_1 \subseteq K_2 \subseteq \dots \subseteq K_L. \quad (14.35)$$

For a field $\mathbb{F}$ and homological degree p , the inclusion maps induce a persistence module

$$H_p(K_1; \mathbb{F}) \rightarrow H_p(K_2; \mathbb{F}) \rightarrow \dots \rightarrow H_p(K_L; \mathbb{F}). \quad (14.36)$$

Its barcode records intervals $[b, d)$ over which connected components, loops, or higher cycles persist [12, 13, 14]. In the contest implementation, exact barcode computation is replaced by differentiable surrogates: 0-dimensional persistence is approximated by nearest-neighbor/MST edge scales, 1-dimensional cycle pressure is approximated by triangle-closure and cycle-flux terms, and higher clique growth is monitored by soft triangle density. This is the missing bridge between the practical loss and persistent homology: the model is not merely regularizing distances, it is regularizing a small persistence module of analogical hidden-state relations.

Definition 14.7 (Directed persistent analogy module). For a directed thresholded adjacency $A_\ell^\rightarrow$, define the directed flag complex $K_\ell^\rightarrow$ whose ordered p -simplices $(i_0, \dots, i_p)$ satisfy $A_\ell^\rightarrow(i_r, i_s) > 0$ for every $r < s$. If the directed adjacencies are nested with ℓ , then

$$K_1^\rightarrow \subseteq K_2^\rightarrow \subseteq \dots \subseteq K_L^\rightarrow \quad (14.37)$$

and the directed chain complexes induce directed persistence modules

$$H_p(K_1^\rightarrow; \mathbb{F}) \rightarrow \dots \rightarrow H_p(K_L^\rightarrow; \mathbb{F}). \quad (14.38)$$

When the antisymmetric form Ω is nonzero, reversing an arrow can change the simplex set; this is the topology-level analogue of noncommutative toric memory.

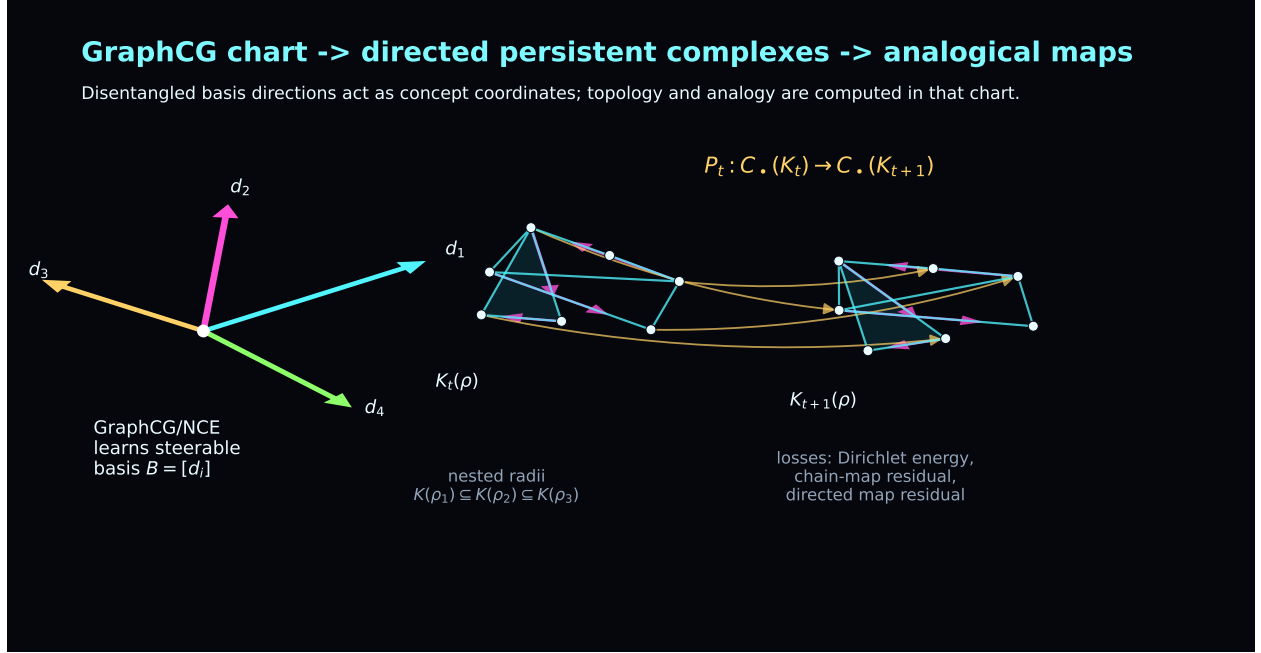


Figure 11: GraphCG supplies a steerable concept chart; ToricGT builds directed persistent complexes in that chart and learns soft analogical maps between local reasoning complexes. The maps are functor-like, but they also carry filtered simplicial, chain-map, and persistence-module structure.

Definition 14.8 (Filtered topological analogical map). Let $K_s(\rho_\ell)$ and $K_{s+1}(\rho_\ell)$ be two consecutive reasoning-window complexes in the GraphCG chart. A soft analogical transport is

$$P_s(i, j) = \frac{\exp(-\|\xi_i^{(s)} - \xi_j^{(s+1)}\|_2 / \tau)}{\sum_k \exp(-\|\xi_i^{(s)} - \xi_k^{(s+1)}\|_2 / \tau)}. \quad (14.39)$$

It pushes the source adjacency and directed adjacency to the target window by

$$\widehat{A}_\ell^{(s+1)} = P_s^\top A_\ell^{(s)} P_s, \quad \widehat{A}_\ell^{\rightarrow, (s+1)} = P_s^\top A_\ell^{\rightarrow, (s)} P_s. \quad (14.40)$$

The differentiable map residual is

$$\mathcal{L}_{\text{map}} = \frac{1}{L} \sum_{\ell=1}^L \left\| \widehat{A}_\ell^{(s+1)} - A_\ell^{(s+1)} \right\|_F^2 + \left\| \widehat{A}_\ell^{\rightarrow, (s+1)} - A_\ell^{\rightarrow, (s+1)} \right\|_F^2. \quad (14.41)$$

The map is functor-like, but its intended structure is stronger than a bare functor: it should also respect the filtration order, approximately commute with boundary and chain maps, and induce low-residual morphisms between persistence modules.

Definition 14.9 (Exact small persistence-module morphism audit). For sampled analysis windows, replace the soft adjacencies by hard thresholded flag complexes over $\mathbb{F}_2$ up to dimension 2. Let $C_p(K_s(\rho_\ell))$ be the p -chain group and ∂_p the boundary. A nearest-neighbor vertex map induced by P_s is accepted at target radius $\rho_{\ell'}$ if every source edge and triangle maps either to a collapsed

simplex or to an edge or triangle in $K_{s+1}(\rho_{\ell'})$. It then induces chain maps $F_{p,\ell,\ell'}$ and homology maps

$$(F_{p,\ell,\ell'})_* : H_p(K_s(\rho_{\ell}); \mathbb{F}_2) \longrightarrow H_p(K_{s+1}(\rho_{\ell'}); \mathbb{F}_2). \quad (14.42)$$

The audit reports $\dim H_0$, $\dim H_1$, the ranks of $(F_0)_*$ and $(F_1)_*$, the minimal radius shift $\ell' - \ell$ required for a simplicial map, edge and triangle validity, directed-edge validity, and whether the complex was truncated for tractability.

Proposition 14.10 (Chain-map validity implies a homology map). *If $F_{p,\ell,\ell'}$ satisfies*

$$\partial_p^{s+1} F_{p,\ell,\ell'} = F_{p-1,\ell,\ell'} \partial_p^s, \quad (14.43)$$

then it induces a well-defined linear map on H_p over $\mathbb{F}_2$.

Proof. If $z \in C_p(K_s)$ is a cycle, then $\partial_p^s z = 0$. The chain-map identity gives

$$\partial_p^{s+1} F_p z = F_{p-1} \partial_p^s z = 0, \quad (14.44)$$

so cycles map to cycles. If z and z' differ by a boundary, $z - z' = \partial_{p+1}^s w$, then

$$F_p z - F_p z' = F_p \partial_{p+1}^s w = \partial_{p+1}^{s+1} F_{p+1} w, \quad (14.45)$$

so their images differ by a boundary. Therefore the map depends only on homology classes. $\square$

Proposition 14.11 (Persistence stability for analogy filtrations). *Let d and $\hat{d}$ be two symmetric distance matrices on the same relation arrows, and let $\text{Dgm}_p(d)$ and $\text{Dgm}_p(\hat{d})$ be the degree- p persistence diagrams of their Vietoris–Rips filtrations. Then the bottleneck distance obeys*

$$d_B(\text{Dgm}_p(d), \text{Dgm}_p(\hat{d})) \leq \|d - \hat{d}\|_{\infty}. \quad (14.46)$$

Consequently, small perturbations of hidden relation arrows cannot arbitrarily change the persistent homology unless they close or open a small-margin topological feature.

Proof. If $\|d - \hat{d}\|_{\infty} \leq \eta$, then every edge present in the Rips complex of d at radius ρ is present in the Rips complex of $\hat{d}$ at radius $\rho + \eta$, and conversely with d and $\hat{d}$ exchanged. Thus the two filtrations are η -interleaved. The algebraic stability theorem for persistence diagrams then gives the bottleneck bound [15, 16]. The final claim follows because a topological feature whose birth-death margin is larger than 2η cannot be removed by such a perturbation. $\square$

The implementation uses differentiable proxies rather than a heavy persistent-homology dependency. It logs inclusion residuals

$$\mathcal{L}_{\text{inc}} = \sum_{\ell < L} \|\max(0, A_{\ell} - A_{\ell+1})\|_F^2, \quad (14.47)$$

chain-map commutators for row-normalized prolongations P_{ℓ} ,

$$\mathcal{L}_{\text{chain}} = \sum_{\ell < L} \|P_{\ell+1} P_{\ell} - P_{\ell} P_{\ell+1}\|_F^2, \quad (14.48)$$

soft triangle density $\sum_{i,j,k} A_{ij} A_{jk} A_{ik}$, directed transitive residuals, and directed cycle/holonomy flux

$$\Phi_{\ell}^{\rightarrow} = \sum_{i,j,k} A_{\ell}^{\rightarrow}(i, j) A_{\ell}^{\rightarrow}(j, k) A_{\ell}^{\rightarrow}(k, i) \max(0, \Omega_{ij}) \max(0, \Omega_{jk}) \max(0, \Omega_{ki}). \quad (14.49)$$

14.8 Behavior modification protocols as toric-tropical corridor control

The preceding GraphCG and directed-persistence machinery also gives a concrete way to steer model behavior. The intended use is not opaque personality scripting; it is an auditable control layer for keeping hidden reasoning in regions associated with helpfulness, harmlessness, calibration, appropriate tone, rigor, and level of detail, while discouraging regions associated with hallucination, sycophancy, unsafe compliance, brittle role-play, or ungrounded verbosity. Recent interpretability work on the Assistant Axis identifies a one-dimensional persona direction in activation space and shows that activation capping in a normal Assistant interval can reduce persona drift [10]. The tropical-quiver steering atlas gives the natural generalization: replace one global direction by a chamberwise family of steering coordinates, corridors, and local quadratic metrics [11].

Let $h_{\ell,t} \in \mathbb{R}^d$ be the residual state at layer or graph-of-thought vertex ℓ and time t . Let

$$B_\ell = [d_{\ell,1}, \dots, d_{\ell,r}] \in \mathbb{R}^{d \times r}, \quad \xi_{\ell,t} = B_\ell^\top h_{\ell,t} \quad (14.50)$$

be the GraphCG chart. A policy π supplies signed labels, reward-model scores, verifier outcomes, style labels, refusal/helpfulness labels, and memory-compatibility tags. From these data the trainer estimates behavior coordinates

$$S_{\pi,C}(\xi) = W_{\pi,C}\xi + b_{\pi,C} \quad (14.51)$$

on each occupied toric-tropical cell C of the pulled-back normal fan. The desired behavior corridor is a closed polytope

$$K_{\pi,C} = \{y \in \mathbb{R}^m : \ell_j(C, \pi) \leq y_j \leq u_j(C, \pi) \ \forall j, \quad R_{\pi,C}y \leq r_{\pi,C}\}. \quad (14.52)$$

The interval coordinates may encode Assistant-likeness, epistemic caution, citation/verification demand, concision, warmth, mathematical rigor, refusal confidence, or domain tone. The halfspaces encode interactions that should not be separable: for example, high warmth may be allowed only with adequate truthfulness margin, and high confidence may be allowed only when verifier support and memory provenance are strong.

The inference-time correction is the cellwise projection

$$\Pi_{\pi,C}(h^+) \in \arg \min_{\tilde{h} \in h^+ + \text{im}(B_\ell)} \frac{1}{2} \left\| \tilde{h} - h^+ \right\|_{G_C}^2 + \lambda_C \text{dist}(S_{\pi,C}(B_\ell^\top \tilde{h}), K_{\pi,C})^2 + \eta_C \mathcal{A}_{\pi,C}(\tilde{h}). \quad (14.53)$$

Here $G_C \succ 0$ is a local metric and $\mathcal{A}_{\pi,C}$ is an algebraic barrier defined below. If $r = 1$, $B = v / \|v\|_2$, $S(h) = \langle v, h \rangle$, $K = [a, b]$, $G_C = I$, and $\eta_C = 0$, then (14.53) reduces to ordinary Assistant-Axis capping:

$$h \mapsto h + \frac{\text{clip}(\langle v, h \rangle, [a, b]) - \langle v, h \rangle}{\|v\|_2^2} v. \quad (14.54)$$

Thus the Assistant Axis is not discarded; it is the rank-one chart of the more general protocol. The ToricGT extension adds multiple learned axes, chamber-dependent intervals, graph-of-thought topology, memory provenance, and algebraic certificates.

Alcoves and wall-crossing control. Inside a toric chamber, affine roots or learned concept normals α_q cut the GraphCG coordinates by hyperplanes

$$H_{q,k} = \{\xi : \langle \alpha_q, \xi \rangle = k\}. \quad (14.55)$$

The connected components of

$$C \setminus \bigcup_{q,k} H_{q,k} \quad (14.56)$$

are behavior alcoves. They refine broad cells into pragmatic operating regions: concise technical proof, exploratory brainstorming, careful refusal plus safe alternative, grounded uncertainty, or long-form tutorial. During training, the policy supplies a target alcove distribution $\mu_\pi^\star$ rather than a single alcove. The occupancy term

$$\mathcal{L}_{\text{occ}} = \sum_A (\hat{\mu}_\theta(A) - \mu_\pi^\star(A))^2 + \lambda_{\text{hit}} \text{BH}_\theta \quad (14.57)$$

penalizes long-run drift into bad regions and excessive grazing of walls. The boundary-hit rate BH_θ is important because many unwanted behaviors are not stable modes at first; they appear as repeated small wall crossings that eventually trap the conversation in the wrong persona, style, or evidence posture.

Commutative-algebra behavior barriers. At a reasoning vertex q_t , let Δ_t be the directed or undirected simplicial complex built from nearby GraphCG relation arrows, and let $x_i(\xi_t)$ be soft chamber coordinates. For a desired policy complex Δ_π , the Stanley–Reisner barrier is

$$\mathcal{L}_{\text{SR-beh}} = \sum_{F \notin \Delta_\pi} \prod_{i \in F} x_i(\xi_t), \quad (14.58)$$

so forbidden coactivations such as “high confidence” plus “low evidence” plus “unsafe compliance” receive direct polynomial pressure. If A is the finite exponent table for the active toric chart, the toric-ideal barrier is

$$\mathcal{L}_{I_A\text{-beh}} = \sum_{x^u - x^v \in I_A^{\leq D}} \left(\sum_i u_i \log(x_i + \epsilon) - \sum_i v_i \log(x_i + \epsilon) \right)^2. \quad (14.59)$$

This keeps behavior coordinates compatible with the affine semigroup chart instead of allowing the steering head to invent inconsistent local coordinates. The exact sidecar computes the corresponding Stanley–Reisner ideals, toric-binomial relations, Fitting summaries, Taylor-resolution ranks, and DG-algebra checks; the trainer sees bounded differentiable polynomial evaluations. The algebraic piece of (14.53) can therefore be chosen as

$$\mathcal{A}_{\pi,C} = \lambda_{\text{SR}} \mathcal{L}_{\text{SR-beh}} + \lambda_{I_A} \mathcal{L}_{I_A\text{-beh}} + \lambda_{\partial^2} \|\partial_{t-1} \partial_t\|_F^2 + \lambda_{\text{DG}} \left\| d(ab) - d(a)b - (-1)^{|a|} ad(b) \right\|^2. \quad (14.60)$$

These terms make the protocol more robust than a scalar classifier: it controls which combinations of latent behavior variables may coexist, whether those combinations lie on the intended toric chart, and whether graph-of-thought transitions form a coherent complex.

Training objective. For supervised or preference-labeled data, the behavior protocol is trained with a small auxiliary weight on top of BPB or task loss:

$$\begin{aligned} \mathcal{L}_{\text{BMP}} = & \mathcal{L}_{\text{LM/BPB}} + \lambda_{\text{corr}} \mathbb{E}_{\ell,t} \text{dist}(S_{\pi,C}(\xi_{\ell,t}), K_{\pi,C})^2 \\ & + \lambda_{\text{wall}} \mathbb{E}_{\ell,t,q} \text{softplus}(\tau(g_q(\xi_{\ell,t}) - m_q)) + \lambda_{\text{occ}} \mathcal{L}_{\text{occ}} + \lambda_{\text{alg}} \mathcal{A}_{\pi,C} \\ & + \lambda_{\text{gfn}} \mathcal{L}_{\text{GFlowNet-corr}} + \lambda_{\text{mem}} \mathcal{L}_{\text{memory-corr}} + \lambda_{\text{ana}} \mathcal{L}_{\text{analogy-corr}}. \end{aligned} \quad (14.61)$$

The GFlowNet reward is modified by a corridor factor

$$R_{\text{corr}}(\tau) = R_{\text{task}}(\tau) \exp \left(-\beta \sum_t \text{dist}(S_{\pi,C_t}(\xi_t), K_{\pi,C_t})^2 - \beta_{\text{bad}} \sum_t \mathcal{L}_{\text{SR-beh}}(t) \right), \quad (14.62)$$

so graph-of-thought search prefers terminal answers reached through stable, evidence-compatible reasoning paths. The weights should start conservatively: the base BPB and verifier losses remain primary, while corridor and algebraic terms become stronger only after ablations show reduced unsafe behavior or hallucination without BPB damage.

Memory and analogy. Trajectory memory becomes a graph $M = (V_M, E_M)$ whose vertices store hidden summaries, corridor labels, source provenance, verifier outcomes, and small certificate hashes. Retrieval uses not only cosine similarity but also chamber compatibility:

$$\text{score}(q, m) = \lambda_h \langle \text{norm } h_q, \text{norm } h_m \rangle - \lambda_C \text{dist}(S_{\pi, C_q}(\xi_q), K_{\pi, C_m})^2 + \lambda_v \text{Verifier}(m) - \lambda_{\text{bad}} \mathcal{L}_{\text{SR-beh}}(m). \quad (14.63)$$

Analogical transfer is allowed when a source corridor can be transported into the target corridor. For a soft transport $P_{s \rightarrow t}$ and affine map $A_{s \rightarrow t}$ between behavior coordinates, use

$$\mathcal{L}_{\text{analogy-corr}} = \|S_t(P_{s \rightarrow t} \xi_s) - A_{s \rightarrow t} S_s(\xi_s)\|_2^2 + \text{dist}(S_t(P_{s \rightarrow t} \xi_s), K_{\pi, C_t})^2 + \mathcal{L}_{\text{map}}(P_{s \rightarrow t}). \quad (14.64)$$

This prevents analogy from becoming surface-level mimicry. The transported reasoning graph must land in the right behavioral corridor and must preserve enough filtered topological structure to remain auditable.

Operational protocol. A practical implementation uses five stages. First, learn or refresh GraphCG axes from contrastive examples of desired and undesired behaviors, using orthogonality and covariance penalties. Second, fit Assistant-Axis-like and domain-specific behavior coordinates in the chart, but store them as chamberwise corridors rather than global scalars. Third, train with the small $\mathcal{L}_{\text{BMP}}$ auxiliary while logging BPB, verifier accuracy, corridor distance, wall-hit rate, bad-nonface mass, toric-binomial residual, memory-corridor compatibility, and analogy-corridor residual. Fourth, at inference time apply projection (14.53) only when the state leaves the calibrated safe band, mirroring light-touch activation capping. Fifth, run periodic sidecar audits that materialize the exact complexes, ideals, free-resolution summaries, Fitting minors, DG products, and persistence morphisms for sampled trajectories. A protocol is promoted only when the behavioral metric improves and the BPB or task metric does not regress beyond a predeclared tolerance.

14.9 DEC conservative reasoning flow

The directed simplicial layer also admits a conservative-flow interpretation inspired by discrete exterior calculus (DEC) discretizations of incompressible Navier–Stokes equations on simplicial surface meshes [17]. Mohamed, Hirani, and Samtaney rewrite the continuous equations using exterior derivative, Hodge star, wedge product, and interior product, then replace these operators by DEC analogues. The central lesson for ToricGT is not to simulate a fluid, but to audit whether a discrete trajectory respects conservative algebraic identities beyond pointwise prediction loss. In the DEC paper, mass and vorticity conservation and kinetic-energy behavior reveal physical fidelity of the discretization; in ToricGT, analogous quantities reveal whether graph-of-thought hidden flows are organized or merely oscillatory.

For a local reasoning window at radius ρ_ℓ , let $A_\ell^\rightarrow \in [0, 1]^{n \times n}$ be the directed adjacency and set

$$u_\ell = A_\ell^\rightarrow - (A_\ell^\rightarrow)^\top. \quad (14.65)$$

This antisymmetric matrix is treated as a discrete 1-form on the directed 1-skeleton. Its divergence proxy is

$$(\delta u_\ell)_i = \frac{1}{n-1} \sum_j u_\ell(i, j), \quad \mathcal{L}_{\text{mass}}(\ell) = \frac{1}{n} \sum_i (\delta u_\ell)_i^2. \quad (14.66)$$

Low mass residual means that the local reasoning flow is not creating or destroying hidden-state mass at a vertex merely because the filtration radius changed. Define a node circulation proxy

$$\omega_{\ell,i} = \frac{\sum_j A_{\ell}(i,j)u_{\ell}(i,j)}{\sum_j A_{\ell}(i,j) + \epsilon}, \quad (14.67)$$

where A_{ℓ} is the symmetric adjacency. The vorticity drift across adjacent radii is

$$\mathcal{L}_{\omega}(\ell) = \|\omega_{\ell} - \omega_{\ell-1}\|_2^2 / n. \quad (14.68)$$

The edge-flow kinetic energy is

$$E_{\ell} = \frac{\sum_{ij} A_{\ell}(i,j)u_{\ell}(i,j)^2}{\sum_{ij} A_{\ell}(i,j) + \epsilon}, \quad \mathcal{L}_E(\ell) = (E_{\ell} - E_{\ell-1})^2. \quad (14.69)$$

To mimic the metric role of the Hodge star, the implementation uses the HDBSCAN core radii as a diagonal dual-volume proxy,

$$H_{ij} = \frac{(c_i + c_j + \epsilon)^{-1}}{\text{mean}_{p \neq q} (c_p + c_q + \epsilon)^{-1}}, \quad E_{\ell}^* = \frac{\sum_{ij} H_{ij} A_{\ell}(i,j)u_{\ell}(i,j)^2}{\sum_{ij} H_{ij} A_{\ell}(i,j) + \epsilon}. \quad (14.70)$$

The Hodge-balance residual is

$$\mathcal{L}_{\star}(\ell) = (E_{\ell}^* / (|E_{\ell}| + \epsilon) - 1)^2. \quad (14.71)$$

Finally, the DEC convective term in the paper motivates a wedge/interior-product consistency check. With average edge vorticity $\bar{\omega}_{ij} = (\omega_i + \omega_j)/2$, define

$$(u \wedge \omega)_{ij} = u_{ij} \bar{\omega}_{ij}, \quad (14.72)$$

$$(i_u \omega)_{ij} = A_{ij}^{\rightarrow} \omega_j - A_{ji}^{\rightarrow} \omega_i, \quad (14.73)$$

and penalize

$$\mathcal{L}_{\wedge}(\ell) = \frac{\sum_{ij} A_{\ell}(i,j) ((u \wedge \omega)_{ij} - (i_u \omega)_{ij})^2}{\sum_{ij} A_{\ell}(i,j) + \epsilon}. \quad (14.74)$$

The DEC conservative auxiliary is

$$\mathcal{L}_{\text{DEC}} = \mathcal{L}_{\text{mass}} + 0.25\mathcal{L}_{\omega} + 0.10\mathcal{L}_E + 0.05\mathcal{L}_{\star} + 0.05\mathcal{L}_{\wedge}. \quad (14.75)$$

It enters only as a small part of the step-topology loss. The intended healthy regime is not zero directed flow: it is low divergence, bounded vorticity and kinetic drift, nonzero but stable directed cycle structure, and no domination of the BPB objective by a geometric auxiliary.

The latest training branch also adds a radius-parametrized HDBSCAN surrogate [18, 19, 20]. For each relation class, let c_i be the k th-nearest-neighbor core distance of a_i and define the mutual-reachability distance

$$d_{\text{mr}}(i,j) = \max\{c_i, c_j, d_{ij}\}. \quad (14.76)$$

Across the same radii ρ_{ℓ} , define persistent density affinities

$$H(i,j) = \frac{1}{L} \sum_{\ell=1}^L \sigma \left(\frac{\rho_{\ell} - d_{\text{mr}}(i,j)}{\tau} \right) (1 - \delta_{ij}). \quad (14.77)$$

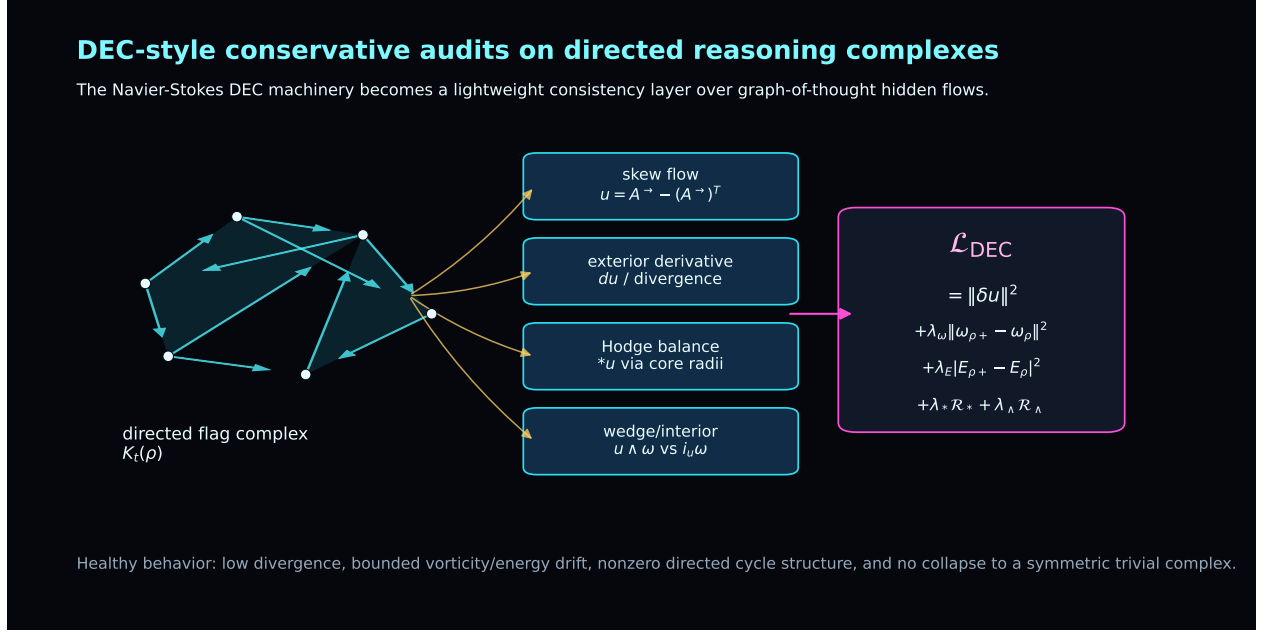


Figure 12: DEC-inspired conservative audits for graph-of-thought reasoning. A directed local reasoning complex supplies a discrete 1-form; divergence, circulation, Hodge-weighted energy, and wedge/interior consistency become finite diagnostics and low-weight training signals.

The auxiliary loss uses detached high-stability affinities as weights,

$$\mathcal{L}_{\text{HDB}} = \frac{\sum_{i \neq j} w_{ij} d_{ij}^2}{\sum_{i \neq j} w_{ij} + \epsilon}, \quad w_{ij} = [\max(0, H(i, j) - \alpha)]^2 \mathbf{1}\{s_i \geq m - 1, s_j \geq m - 1\}, \quad (14.78)$$

where $s_i = \sum_j H(i, j)$ is a density-stability score and m is the minimum cluster size. The detachment of w_{ij} is intentional: persistent density neighborhoods may pull together, but unstable or outlier arrows do not receive gradients that would collapse unrelated analogies. Periodic analyses compute the corresponding hard radius sweep, stable-cluster counts, outlier fractions, mutual-reachability heatmaps, and density-persistence adjacency plots. Thus HDBSCAN is used as a relevance gate for the topology loss, not as an extra non-differentiable optimizer inside backpropagation.

Proposition 14.12 (Scale stability of normalized analogy filtrations). *If all hidden arrows in one relation class are multiplied by a common scalar $\lambda > 0$, then d_{ij} is unchanged. Consequently the symmetric filtration $\{A_\ell\}$ and every diagnostic depending only on d_{ij} is invariant up to numerical ϵ effects. If both channel blocks in Ω are normalized before forming the skew matrix, the directed filtration is also invariant to the same common rescaling.*

Proof. The numerator $\|\lambda a_i - \lambda a_j\|_2$ and the median denominator are both multiplied by λ , so their ratio is unchanged. Therefore each logit $(\rho_\ell - d_{ij})/\tau$ is unchanged, and so is A_ℓ . The inclusion, chain-map, barcode-proxy, and triangle diagnostics are deterministic functions of these adjacencies. For the directed case, normalized channel blocks satisfy $\lambda a_i^{(r)} / \|\lambda a_i^{(r)}\| = a_i^{(r)} / \|a_i^{(r)}\|$ for $\lambda > 0$, so Ω_{ij} is unchanged. Hence $A_\ell^\rightarrow$ and the directed diagnostics are unchanged as well. $\square$

The noncommutative toric memory shapes the same trajectories through irrational phase probes.

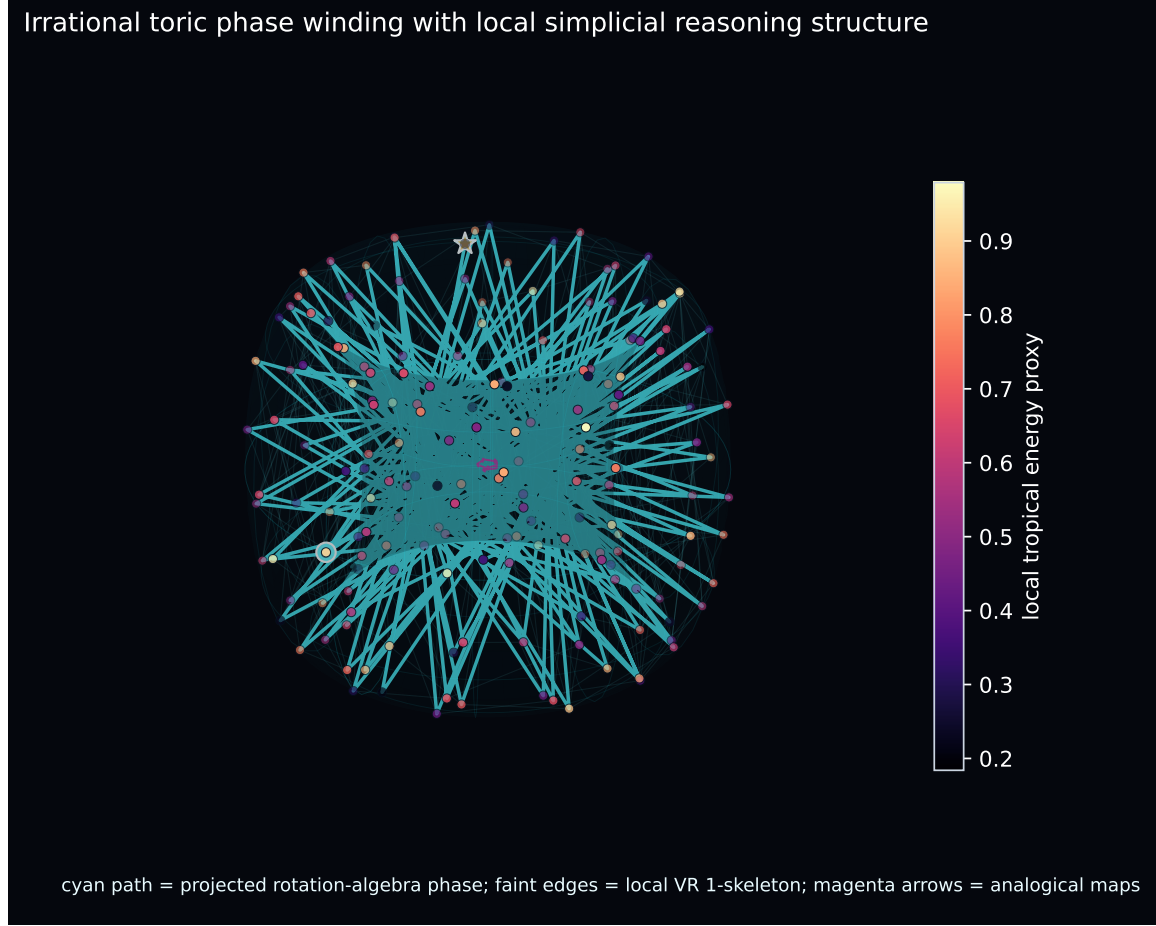


Figure 13: Irrational toric phase projection of a reasoning trajectory. The torus path visualizes pseudo-periodic phase coverage; local Vietoris–Rips edges reveal step-level simplicial structure; magenta arrows indicate soft analogical maps between consecutive windows.

In the compact Parameter-Golf adapter, target positions receive phase features

$$(\sin 2\pi\theta t, \cos 2\pi\theta t, \sin 2\pi\beta t, \cos 2\pi\beta t), \quad (14.79)$$

and memory slots carry a finite cocycle-like phase

$$\chi_s = \exp(2\pi i(\theta s^2 + \beta s)). \quad (14.80)$$

When $1, \theta, \beta$ are rationally independent, the projected path

$$\Pi(t) = ((R + r \cos 2\pi\beta t) \cos 2\pi\theta t, (R + r \cos 2\pi\beta t) \sin 2\pi\theta t, r \sin 2\pi\beta t) \quad (14.81)$$

is pseudo-periodic and equidistributed on the visualization torus in the finite-prefix sense. This does not by itself solve reasoning; it supplies a nonrepeating phase scaffold that helps separate random-order positions, exposes recurrence, and contributes an antisymmetric skew term to directed topology diagnostics.

Periodic analyses render these quantities directly. For selected reasoning records the script writes directed filtration curves for edge density, triangle density, asymmetry, cycle flux, DEC

conservation residuals, and mass residuals; heatmaps of normalized distances, mutual reachability, the antisymmetric toric skew matrix, and directed adjacencies; window-by-radius simplex hierarchy plots with DEC kinetic and wedge/interior panels; exact $\mathbb{F}_2$ persistence-module morphism heatmaps for H_0 and H_1 ; and toric phase/simplicial trajectory plots. Thus the noncommutative topology is both a training pressure and an auditable explanation object.

Proposition 14.13 (Dense recurrent blocks are the byte-efficient default). *Under a strict serialized-byte cap, replacing a dense feed-forward block of size $O(dd_{\text{ff}})$ by E full experts costs $O(Edd_{\text{ff}})$ stored scalars, whereas applying the same dense block recurrently r times costs no additional stored scalars. Therefore the Parameter-Golf default should be dense recurrent ToricGT blocks, with Soft-MoE retained as a measured ablation or low-rank adapter variant.*

Proof. The artifact stores parameters, tokenizer, code, and metadata, not floating-point operations. A full expert bank serializes E separate MLP parameter sets. A recurrent dense block serializes one MLP parameter set and increases only runtime. When the cap is binding and the evaluator allows a fixed training/evaluation program, recurrent dense computation has a better first-order byte/computation tradeoff. Soft-MoE becomes attractive only if low-rank adapters or routing vectors improve BPB enough to justify their extra bytes. $\square$

14.10 Micro-ToricGT language-model design

The contest model should be a language model inspired by ToricGT, not the full graph-to-graph encoder. The recommended design is:

1. a byte-level tokenizer with tied input/output embeddings;
2. randomized content-independent target-position order by default;
3. a small number of dense unique Transformer blocks reused recurrently to increase effective depth without storing more block parameters;
4. lower softmax layers and upper tropical-ring layers with stabilized score normalization and residual gates;
5. fixed toric phase features of target positions and optional PolarQuant KV perturbation audits;
6. a compact prefix-visible GFlowNet action policy for latent graph-of-thought sampling;
7. compact serialization of `graph_json` node/edge records into the byte stream, so graph-structured supervision is not discarded in the contest adapter;
8. final int8 export by default, with int6/int4 packing tested only after round-trip BPB checks;
9. optional Soft-MoE or low-rank expert adapters only as byte-accounted ablations after a dense baseline is stable.

A safe starting microarchitecture for the implemented dense track is

$$V = 260, \quad d = 384, \quad H = 6, \quad L_{\text{unique}} = 7, \quad L_{\text{effective}} = 14, \quad (14.82)$$

with tied embeddings, recurrent block tying, hybrid softmax/tropical-ring attention, a tiny $A = 8$ action GFlowNet policy, and no stored expert bank. In the current artifact audit this gives about 13.0M stored scalars and an int8 compressed artifact around 12.94MB, leaving margin below

16,000,000 bytes for code and metadata. If P_{fp} is the uncompressed scalar count, then int8 export roughly permits $P_{\text{fp}} < 16\text{M}$ minus code overhead; int6 export roughly permits $P_{\text{fp}} < 21\text{M}$ before entropy compression; int4 export permits more parameters but is less stable unless quantization-aware training is strong. These are engineering estimates; the actual gate is the serialized artifact size.

For experimental triage, use explicit BPB bands. Runs above 1.35 BPB are debugging runs. A range of 1.25–1.35 indicates a functional but noncompetitive small language model. A range of 1.20–1.22 is the first serious target because it is near the naive baseline reported in OpenAI’s challenge recap. A range of 1.16–1.19 is strong; 1.13–1.15 is excellent; and ≤ 1.12 BPB is exceptional or SOTA-class under the public recap. Any claim below 1.10 BPB should be treated as a possible breakthrough only after strict tokenizer, leakage, and score-before-update audits. Since the record-track rules require statistically meaningful improvement, single-run changes below roughly 0.007 BPB should not be interpreted as reliable without repeated runs.

Proposition 14.14 (Depth recurrence improves effective computation without increasing stored block parameters). *Let a block Ψ_θ be applied r times with shared parameters. The stored parameter count is $|\theta|$, while the effective computational depth is r . If Ψ_θ is token equivariant, then Ψ_θ^r is token equivariant.*

Proof. Only one copy of θ is serialized, so stored parameters do not scale with r . The composition of r copies of the same equivariant map is equivariant because for any permutation P ,

$$\Psi_\theta^r(PX) = \Psi_\theta^{r-1}(P\Psi_\theta(X)) = P\Psi_\theta^r(X) \quad (14.83)$$

by induction. □

14.11 Soft-MoE under a 16 MB artifact cap

A naive Soft-MoE can violate the artifact budget because it stores multiple expert MLPs. The contest adaptation must use one or more of the following parameter-sharing schemes.

1. **Shared base plus expert adapters:** $f_e(x) = f_0(x) + B_e\sigma(A_ex)$ with small rank $r \ll d$.
2. **Tied expert matrices:** all experts share W_1, W_2 but have expert-specific gates, biases, or low-rank deltas.
3. **Grouped experts:** experts are reused across recurrent layers and only routing vectors Φ change by layer.
4. **Quantized experts:** expert weights are trained with straight-through quantization and exported in int6/int8.
5. **Pruned slots:** keep $ES \leq 8$ or 16 for the contest model; large slot counts are inappropriate under the wallclock cap.

For a low-rank expert adapter with rank r , the incremental parameter cost per expert is approximately

$$P_{\text{adapter}} \approx 2dr + 2d_{\text{ff}}r + O(d + d_{\text{ff}}), \quad (14.84)$$

which is far smaller than a full expert cost $2dd_{\text{ff}}$. Therefore a Parameter-Golf Soft-MoE block should store one shared dense MLP plus small expert adapters. The graph-reasoning version may use full typed experts; the contest version should not unless artifact measurements prove it fits.

14.12 Distillation from ToricGT to the contest LM

The full ToricGT model can help the contest track before submission by producing training-time supervisory signals. The contest artifact should not need the teacher at evaluation. Let p_T be a trained ToricGT-derived teacher distribution over serialized graph-reasoning traces and p_S be the micro language model. A compliant training objective on allowed training data is

$$\mathcal{L}_{\text{PG}} = \mathcal{L}_{\text{LM}} + \lambda_{\text{KD}} T^2 \text{KL} \left(p_T^{(T)}(\cdot | c) \parallel p_S^{(T)}(\cdot | c) \right) + \lambda_h \|Rh_T - h_S\|_2^2 + \lambda_q \mathcal{L}_{\text{QAT}}, \quad (14.85)$$

where c ranges over training contexts, T is distillation temperature, R is a small learned projection used only during training, and $\mathcal{L}_{\text{QAT}}$ is the quantization-aware training loss. Teacher logits, if stored, must be generated from allowed training data and must not be used as hidden validation information. In the final artifact, omit the teacher, omit distillation heads, and serialize only the student.

14.13 Artifact packing and runtime implementation

A robust contest script should separate training-time tensors from serialized tensors. During training, keep fp16 or bf16 master weights and fake-quantized forward weights. At export, pack only the deployable state:

$$\mathcal{A} = \text{Pack}(\text{Quantize}(\theta_S), \text{Tokenizer}, \text{Config}, \text{DecodeCode}). \quad (14.86)$$

The export test is not complete until the model is loaded from $\mathcal{A}$ and evaluated without the floating-point training checkpoint. The following checks should be hard failures in `train_gpt.py`:

```
assert artifact_bytes <= 16_000_000
assert not uses_network()
assert not reads_validation_except_eval_stream()
assert roundtrip_bpb_close(float_eval_bpb, packed_eval_bpb, tolerance=0.01)
assert causal_audit_passed(model)
```

The size audit should report at least

$$(B_{\text{code}}, B_{\text{weights}}, B_{\text{tokenizer}}, B_{\text{metadata}}, B_{\text{art}}), \quad (14.87)$$

and the log should include the exact command, seed, git commit, wallclock, GPU type, tokenizer, vocabulary size, number of unique blocks, recurrence depth, number of Soft-MoE experts, slots per expert, quantization bits, validation BPB, and validation bytes. For a ToricGT-derived model, also report whether causal Soft-MoE, toric adapters, tropical gates, or teacher distillation were active.

14.14 Contest record folder checklist

A ToricGT Parameter-Golf submission should create a record folder with:

```
records/<name>/
  README.md          # architecture, training recipe, size accounting
  submission.json    # author, GitHub id, val_bpb, metadata
  train.log          # automatic training/eval log, preferably 3 seeds
  train_gpt.py       # self-contained runnable script
  requirements.txt   # only if extra packages are needed
```

Before opening a pull request, run:

```
python train_gpt.py --dry_run_size_check
python train_gpt.py --minimal_train_check --max_steps 20
python train_gpt.py --roundtrip_quantize
python train_gpt.py --eval_only --assert_no_network
```

The script should print train loss, validation loss, validation BPB, compressed model bytes, code bytes, artifact bytes, seed, wallclock, and hardware. The size check must compute decimal bytes and fail at 16,000,000, not 16 MiB.

14.15 Pragmatic risk controls

The Parameter-Golf track has different failure modes from the research model. The most important controls are:

1. keep a boring dense baseline in the record folder before adding Soft-MoE;
2. measure artifact bytes after every architecture change;
3. verify quantized round-trip evaluation, not only floating-point evaluation;
4. maintain three-seed evidence before claiming a record-quality result;
5. keep validation handling strictly score-first and never train on future validation tokens;
6. prefer self-contained torch code over fragile external imports, even if imports are nominally allowed;
7. document every compression, tokenizer, and test-time adaptation trick in the README.

The contest leaderboard shows that successful submissions often combine small-model architecture changes, quantization, recurrent or parallel residual computation, tokenizer/data transforms, and legal test-time adaptation. ToricGT should borrow these tactics only when they are compatible with the self-contained artifact and validation rules.

14.16 Current oai implementation and recovery snapshot

The active competition branch is `oai`. Its deployable candidate remains the dense random-order Parameter-Golf model, not the full graph encoder: seven stored dense blocks of width 384 are applied recurrently twice, input and output embeddings are tied, lower blocks use ordinary soft-max attention, upper blocks use stabilized tropical-ring attention, and the deployable artifact excludes training-only toric, GraphCG, Koszul, Slepian, and multi-token-head probes. The current artifact audit is about 12.94 MB after int8 compression, comfortably below the 16,000,000 byte limit. The training run uses score-before-update random-order autoregression, compact prefix-visible GFlowNet actions, graph-projected byte chunks from the curated split mirror, and W&B logging for BPB, GFlowNet, topology, toric, complexity, and checkpoint-publishing metrics.

The live training protocol is deliberately conservative. Auxiliary geometric losses are permitted only when deterministic validation BPB is improving or stable. When local BPB curvature flattens or rebounds, the controller enters a scalar recovery phase:

$$\lambda_{\text{toric}} = \lambda_{\text{Koszul}} = \lambda_{\text{flow}} = \lambda_{\text{QAT}} = 0, \quad 0 < \lambda_{\text{GFN}} \ll 1, \quad \lambda_{\text{GraphCG}} \ll 1, \quad \lambda_{\text{contrastive}}, \lambda_{\text{MTP}} \text{ small}, \quad (14.88)$$

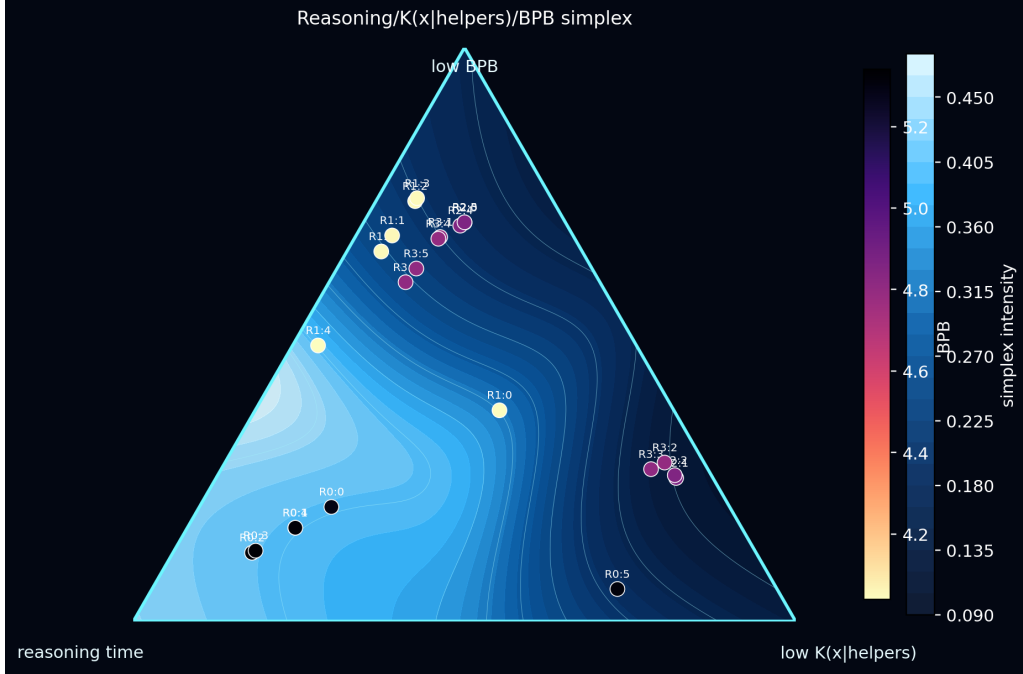


Figure 14: Step-2250 *oai* recovery diagnostic. The reasoning/ $K(x | \text{helpers})$ /BPB simplex places graph-of-thought branches in a three-way tradeoff among additional reasoning budget, conditional-compression structure, and low BPB. The early checkpoint still favors low-BPB branches over longer reasoning budgets, so GraphCG and a small GFlowNet objective are activated while heavier toric/Koszul losses remain gated.

with a slightly increased learning-rate multiplier and tighter gradient clipping. A later step-2250 recovery gate found that train BPB and loss were descending but flattening: median train BPB fell from 3.8067 to 3.5449 over the exported window, with recent slope about -1.92 BPB per 1000 optimizer steps, while the raw log tail reached local values near 3.49–3.60. However GraphCG covariance and analogical-map diagnostics drifted because the active phase had GraphCG loss weight set to zero. Branch search also showed a real inference-time-scaling gap: best branch BPB was 1.33 below mean branch BPB. The next run therefore resumes from `random_order_step_00002250.pt` with $\lambda_{\text{GraphCG}} = 6 \times 10^{-5}$, $\lambda_{\text{analogy}} = 10^{-5}$, $\lambda_{\text{GFN}} = 2.5 \times 10^{-4}$, GFlowNet entropy weight 5×10^{-5} , contrastive weight 8×10^{-5} , learning-rate multiplier 0.16, and clip norm 0.42, while keeping heavier toric, Koszul, trajectory-flow, and QAT losses disabled until the next gate.

The step-2250 geometry gate used three held-out validation records and nine branches. It reported mean branch BPB 4.804, best branch BPB 3.476, mean answer-span BPB 4.776, best answer-span BPB 3.476, mean hidden-trajectory MST efficiency 0.667, path smoothness 0.0480, directed topology asymmetry 0.345, HDBSCAN stability 0.931, exact directed-edge validity 0.949, exact triangle validity 0.742, Slepian concentration 1.000, and Slepian leakage 0.000. Branch search is already finding lower-BPB terminals than the mean branch, but the simplex shows that extra reasoning budget still moves away from the low-BPB corner at this early checkpoint. GFlowNet is therefore promoted gently, not at the later full-alignment weight. The same pass recorded weak tropical/toric margins: mean toric-shadow margin 2.27×10^{-2} , minimum margin 1.22×10^{-4} , and mean toric-geometry active-face margin -1.85 . Strong toric or Koszul training losses therefore stay off; GraphCG is the right immediate auxiliary because it improves the coordinate chart in which future fan and chamber losses will act.

The periodic analysis suite now writes both static and interactive toric trajectory overlays. For each selected validation record it projects hidden reasoning paths through the irrational toric phase map, overlays the best and competing branches on the embedded commutative torus surface, draws local Vietoris–Rips edges, sizes markers by GraphCG chart margin, colors points by local NLL, and draws analogical transport arrows between reasoning windows. The HTML output is a manipulable 3D audit of whether noncommutative toric memory is organizing latent search rather than adding decorative sinusoidal features.

Remark 14.15 (Analysis-gate reliability). The post-resume watcher intentionally interrupts training only after a checkpoint is safely written. A fragile point in early runs was W&B path resolution: the metric analyzer expected an entity/project/run-id path but was sometimes given the human-readable run name. The current analyzer resolves both run ids and run names before downloading history. Thus a pause for analysis should no longer become a terminal stop merely because the W&B display name differs from the run id.

15 Datasets, synthetic families, and leakage control

15.1 Training mixture

The data plan is graph-first. Every raw record is normalized into a graph record with question, answer, reasoning, metadata, stable hashes, graph JSON, token-count estimates, and deterministic split fields. The local curation plan targets chain-of-thought, tree-of-thought, graph-of-thought, mathematical, programming, OpenAI-origin GSM8K, Hebrew morphology, rabbinic Hebrew/Aramaic-English, and Jewish Hebrew text sources. It writes Parquet outputs and split reports suitable for training and, after license review, possible Hugging Face upload.

Dataset	Selected loader/config	License observed	ToricGT role
NuminaMath-CoT	default via datasets	Apache-2.0	large math CoT to proof graphs
OpenR1-Math-220k	all via datasets	Apache-2.0	multi-trace math reasoning
Codeforces-CoTs	decontaminated	CC-BY-4.0	algorithmic/programming CoT
GSM8K	Python/editorial config main	MIT	OpenAI math word problems
Hendrycks MATH	seven subject configs	MIT	competition math and verifier checks
MATH-500	default/test	dataset card	verifier-style benchmark
Tree-of-Thoughts 24k	raw JSON	Apache-2.0	explicit ToT branches
Got Math 500K	raw JSONL stream	Apache-2.0	explicit GoT math
UniMorph Hebrew	raw UniMorph TSV	CC-BY-SA-3.0	Hebrew lemma/inflection graphs
Sefaria parallel pairs	fallback		
	default	CC-BY-4.0	rabbinic Hebrew/Aramaic-English parallel text
Sefaria Hebrew library	default	GPL-3.0	large Jewish Hebrew text library
Superior-Reasoning gpt-oss	stage1/stage2	CC-BY-4.0	frontier open-weight reasoning distillation
GPT-OSS math distill	default	Apache-2.0	gpt-oss math rationales

Dataset	Selected loader/config	License observed	ToricGT role
Algorithmic SFT v1	default	MIT	procedural algorithmic traces
Graph reasoning messages	default	Apache-2.0	graph-structured reasoning dialogue
DAG reasoning	default	Apache-2.0	dependency-aware reasoning traces
Opus reasoning 24k	default	Apache-2.0	high-quality reasoning style transfer

The important loader details are pragmatic. The UniMorph Hub repository may contain an old dataset script, so the Hebrew file should be downloaded directly from the UniMorph GitHub source when the current `datasets` package rejects the script. The GoT and ToT sources are raw JSON/JSONL rather than conventional multi-shard builders, so the curation script downloads and streams them directly. The Hebrew/Jewish-text slice intentionally uses Sefaria and UniMorph Hebrew sources rather than Christian-branded biblical-language datasets when the experimental goal is Jewish Hebrew/rabbinic coverage.

Hebrew rows are niqqud-aware. The curation policy is to preserve pointed Hebrew when the upstream source provides it, prefer same-consonant pointed variants when an equivalent field is present, and explicitly flag unpointed Hebrew rather than synthesize vowels into attested source text. The current audit finds 3,564,756 rows containing Hebrew, of which 2,868 are pointed upstream rows and 3,561,888 are unpointed upstream rows. Strict pointed-Hebrew runs should filter out records with `has_hebrew_without_niqqud=true`; broader Jewish-text pretraining can retain them while making the missing-vowel status visible to the model and to evaluation reports.

15.2 Normalized record schema

Every curated row should contain:

```
record_id, dataset, config, source_split, source_index,
task_family, language, license, role,
question, answer, solution, reasoning,
metadata_json, text, graph_json,
content_hash, group_hash, split,
estimated_tokens, quality_flags_json
```

The schema separates the human-readable training view from the graph view. The `text` field supports ordinary language-model distillation and debugging; the `graph_json` field supports TokenGT conversion, graph-to-graph prediction, GFlowNet state construction, and visualization.

15.3 Graph conversion policy

The conservative base graph has a `problem` node, zero or more `reasoning_step` nodes, an `answer` node, `depends_on` edges between consecutive or referenced steps, and a `supports_answer` edge from the final step or problem node to the answer node. Dataset-specific additions are:

1. Codeforces rows add `problem_statement`, `editorial`, `public_test`, and `code_solution` nodes when available.

2. OpenR1 rows add one generation node per sampled reasoning trace when multiple traces are present.
3. UniMorph rows add `lemma`, `form`, and `features` nodes.
4. Sefaria parallel rows add `ref`, `hebrew_or_aramaic`, `english`, and `category` nodes.
5. Sefaria Hebrew-library rows add `ref`, `category`, `version`, and `text` nodes when metadata is available.
6. ToT/GoT rows preserve branch markers and tag records as `tot` or `got_math` for richer later conversion.

This representation is deliberately conservative: it is sufficient for TokenGT pretraining and can be refined later without redownloading raw sources.

15.4 Leakage-resistant splitting

Random record-level splits are invalid for this setting. Near-duplicate chain-of-thought traces, identical proof graphs, inverse braid words, conjugate torus words, repeated Hebrew lexeme paradigms, and copied Sefaria references can leak structure.

Definition 15.1 (Leakage cluster). A leakage cluster is an equivalence class generated by any of the following high-similarity relations: exact normalized-content hash, source-family key collision, text shingle SimHash prefix match, graph Weisfeiler-Lehman sketch match, algebraic normal-form equivalence, inverse/conjugate word equivalence, same Hebrew root paradigm, Sefaria reference identity, or graph-isomorphism equivalence for synthetic dynamic-programming instances.

The practical splitter computes canonical text, exact `content_hash`, task-family keys such as Codeforces problem id or Sefaria reference, and a stable SimHash prefix over word shingles. The `group_hash` combines task-family key, content hash, and SimHash prefix. Split assignment is deterministic:

$$\text{split}(g) = \begin{cases} \text{train}, & h(g) \in [0, 80), \\ \text{validation}, & h(g) \in [80, 90), \\ \text{test}, & h(g) \in [90, 100), \end{cases} \quad (15.1)$$

where $h(g)$ is a stable hash percentile. All rows with the same group key go to the same split. For synthetic algebra, stronger family holdouts override percentile splitting: hold out denominator intervals q , word lengths, Coxeter ranks, graph sizes, root families, and root-template pairs.

Proposition 15.2 (Cluster splitting prevents direct duplicate leakage). *If every leakage cluster is assigned wholly to one split, then no train/test pair is connected by the chosen leakage relations.*

Proof. Assume for contradiction that a train record r and a test record s are connected by a leakage relation. By definition, r and s lie in the same equivalence class generated by such relations. Cluster splitting assigns the entire class to a single split, contradicting that r is train and s is test. $\square$

15.5 Output layout and commands

The curation output should have the following structure.

```

data/
  curated/
    manifest.json
    split_report.json
    split_report.md
    all.parquet
    train.parquet
    validation.parquet
    test.parquet
    by_dataset/<safe_dataset_name>.parquet
  raw/hf/
    downloaded raw JSON/JSONL fallback files

```

Run a full curation with:

```

conda run -n tokengt env PYTHONPATH=src python scripts/curate_datasets.py \
  --output-dir data/curated \
  --raw-dir data/raw/hf \
  --chunk-size 20000 \
  --num-workers 16 \
  --normalize-batch-size 256

```

Run a bounded sample curation with:

```

conda run -n tokengt env PYTHONPATH=src python scripts/curate_datasets.py \
  --output-dir data/curated_sample \
  --raw-dir data/raw/hf \
  --max-records-per-source 1000 \
  --num-workers 4 \
  --normalize-batch-size 128

```

Validate outputs with:

```

conda run -n tokengt env PYTHONPATH=src python scripts/inspect_curated_data.py \
  --curated-dir data/curated

```

Use 8–16 CPU workers on a 32-thread workstation, lowering the count when other CPU-heavy jobs are running. Large direct downloads can use `aria2c` when available, but the bottleneck is often Python-side graph normalization, SimHash grouping, and Parquet writing.

15.6 Expected scale and license handling

The first full pass is expected to produce about 5.2M records: roughly 859k NuminaMath, 225k OpenR1, 500k GoT Math, 9.8k Codeforces, 8.8k GSM8K, 12.5k MATH, 24.7k ToT, 3.55M Sefaria Hebrew-library records, 3.7k Sefaria parallel pairs, and a small UniMorph Hebrew table. This is enough for the lower Chinchilla-style token budget for 8M–35M parameters once reasoning text, Hebrew text, and graph tokens are counted.

Before publishing any normalized data, re-check every license, preserve source attribution columns, and consider publishing only metadata and graph-conversion outputs where redistribution is allowed. Do not publish records from sources whose terms prohibit redistribution or require gating. GPL-licensed data, in particular, should be handled separately from permissively licensed training mixtures when downstream model or dataset release terms matter.

15.7 Synthetic generator specifications

Rotation words. Sample words in $\{U, U^{-1}, V, V^{-1}\}$, reduce to $\omega^c U^a V^b$, and emit each rewrite as a graph edge labeled `commutes_with_phase` or `cancels`. Hold out denominator intervals q , word lengths, and phase exponents.

Higher tori. Sample skew matrices Θ and words in $U_1^{\pm 1}, \dots, U_n^{\pm 1}$. Targets include ordered exponent vector $a \in \mathbb{Z}^n$ and symbolic phase

$$\exp \left(2\pi i \sum_{j < k} c_{jk} \Theta_{jk} \right). \quad (15.2)$$

Hebrew roots. Sample root families and templates from curated lexica or analyzer outputs. Create graph records with shared root nodes, radical nodes, template nodes, binyan nodes, and uncertain hypotheses. Hold out entire roots or entire root-template combinations to test abstraction.

Tropical algorithms. Generate weighted graphs and full Bellman-Ford/Floyd-Warshall traces. Record selected and dominated candidates, active faces, margins, and final distances.

16 Model, losses, and training schedule

16.1 Architecture

A practical 8M-35M parameter ToricGT family uses $L = 6$ –12 layers, width $d = 256$ –512, eight heads, MLP expansion four, softmax/hybrid lower layers, tropical ring middle and upper layers, node/edge/graph heads, optional Hebrew morphology heads, optional GFlowNet policy heads, default Soft-MoE feed-forward replacements in the upper half of the graph model, and optional PolarQuant cache at inference. The full research model is graph-to-graph. The Parameter-Golf variant is a dense random-order byte model with tied embeddings, recurrent blocks, target-position toric phases, stabilized tropical-ring attention, and byte-accounted quantized export.

The rough parameter count is

$$P \approx L (4d^2 + 8d^2) + O(dV_{\text{feat}}), \quad (16.1)$$

where $4d^2$ is attention projection scale and $8d^2$ is a two-layer feed-forward block with expansion four. Because graph-token feature vocabularies are small compared with language vocabularies, most parameters sit in the encoder. If a dense feed-forward block is replaced by full Soft-MoE experts, the stored parameter count grows roughly like E times the expert MLP size plus dES router parameters. For the research model this can be acceptable when E is small. For Parameter Golf, use shared experts or low-rank expert adapters so that increased specialization does not destroy the artifact budget.

16.2 Composite objective

The supervised objective is

$$\begin{aligned} \mathcal{L}_{\text{sup}} = & \lambda_V \mathcal{L}_V + \lambda_E \mathcal{L}_E + \lambda_G \mathcal{L}_G + \lambda_{\text{eq}} \mathcal{L}_{\text{eq}} + \lambda_{\Theta} \mathcal{L}_{\Theta} + \lambda_{\text{trop}} \mathcal{L}_{\text{margin}} \\ & + \lambda_H (\mathcal{L}_{\text{root}} + \mathcal{L}_{\text{align}} + \mathcal{L}_{\text{binyan}} + \mathcal{L}_{\text{feat}} + \mathcal{L}_{\text{par}}) + \lambda_{\text{moe}} \mathcal{L}_{\text{moe}} + \lambda_{\text{cache}} \mathcal{L}_{\text{PQ}} + \lambda_{\text{KD}} \mathcal{L}_{\text{distill}}. \end{aligned} \quad (16.2)$$

The equivariance loss is

$$\mathcal{L}_{\text{eq}} = \mathbb{E}_{\pi} \|F(\pi G) - P_{\pi}F(G)\|_2^2. \quad (16.3)$$

The torus loss is

$$\mathcal{L}_{\Theta} = \sum_{j < k} \|U_j U_k H - e^{2\pi i \Theta_{jk}} U_k U_j H\|_F^2. \quad (16.4)$$

A stable tropical objective combines margin and entropy:

$$\mathcal{L}_{\text{margin}} = -\mathbb{E}[\Delta_{\text{correct}}] + \beta \mathbb{E}[\max(0, \Delta_{\text{collapse}} - H(A))]. \quad (16.5)$$

16.3 Schedule

1. **Phase A: implementation validation.** CPU-only shape tests, equivariance tests, mask tests, and exact tropical ring-vs-full comparisons.
2. **Phase B: synthetic algebra.** Rotation words, finite tori, braid/Coxeter tasks, and tropical dynamic programming.
3. **Phase C: curated reasoning graphs.** Math, algorithmic, and Hebrew morphology graph records with clustered splits.
4. **Phase D: GFlowNet fine-tuning.** Activate trajectory or subtrajectory balance over embedding-space graph refinements.
5. **Phase E: long-context cache evaluation.** Enable PolarQuant cache for long graph-token traces and compare exact KV, unquantized ring, and polar ring cache.
6. **Phase F: Parameter-Golf random-order compression.** Train the dense random-order byte model with compact graph-json projection and prefix-visible GFlowNet action sampling, measure BPB and artifact bytes, add compact Soft-MoE adapters only if they improve BPB under the same cap, run quantization-aware or post-training export checks, and export a self-contained artifact with exact byte accounting.

17 Evaluation and ablations

Core metrics include node accuracy/regression, edge accuracy/regression, graph answer exact match, proof validity, equivariance error, tropical margin and active-face entropy, torus commutator error, Hebrew root/binyan/feature F1, paradigm consistency, Soft-MoE expert utilization and slot entropy, Parameter-Golf artifact bytes and validation BPB for the micro-LM track, compact GFlowNet action entropy/diversity, GFlowNet reward calibration, terminal diversity, and OOD generalization over graph size, word length, denominator q , Coxeter rank, and Hebrew root families.

Ablation	Question answered
Softmax TokenGT, no toric features	Is graph tokenization alone sufficient?
Softmax TokenGT + toric features	Do phase channels help without tropical heads?

Ablation	Question answered
Tropical heads, no ring schedule	Does max-plus reasoning help independent of systems schedule?
Tropical ring heads	Does exact blockwise evaluation preserve quality at longer context?
No equivariance loss	Does architecture alone enforce enough symmetry in practice?
No torus regularizer	Are phase channels learned structurally or memorized?
No Hebrew graph factorization	Does root-template structure outperform string-only morphology?
GFlowNet token-space vs embedding-space	Which action space gives more diverse high-reward graphs?
Dense FFN vs Soft-MoE ToricGT	Does typed differentiable routing improve graph reasoning without destabilizing training?
Full expert Soft-MoE vs shared-adaptor Soft-MoE	Which expert parameterization gives the best quality/byte tradeoff?
Full ToricGT vs micro-ToricGT LM	Which graph-reasoning inductive biases survive the Parameter-Golf compression regime?
Full KV vs PolarQuant cache	Does polar cache compression preserve long-context graph reasoning?

18 Implementation blueprint

The codebase should be organized as follows.

1. `typed_graph.py`: graph schema, relabeling, canonicalization, masks.
2. `graph_tokenizer.py`: node, edge, endpoint, toric, Hebrew, and structural feature channels.
3. `tropical_attention.py`: full tropical attention, ring tropical attention, provenance, margins.
4. `toric_algebra.py`: continued fractions, Weyl pairs, cocycles, normal forms, trace tasks.
5. `hebrew_graphs.py`: root-template graph conversion, analyzer-hypothesis graphs, paradigm graphs.
6. `model.py`: encoder, task heads, graph decoder, GFlowNet policy head.
7. `gflownet.py`: trajectory balance, subtrajectory balance, replay buffer, novelty metrics.
8. `soft_moe_toric.py`: graph-token Soft-MoE dispatch/combine, typed expert banks, slot diagnostics, chunked dispatch.
9. `random_order_lm.py`: dense random-order autoregressive byte model, toric position phases, tied embeddings, recurrence, compact GFlowNet action scaling, and score-before-update tests.
10. `causal_soft_moe.py`: prefix-scan Soft-MoE for optional autoregressive Parameter-Golf ablations, causal audits, score-before-update tests.
11. `polar_cache.py`: preconditioning, recursive polar transform, codebooks, packing, dequantized kernels.

12. `parameter_golf_export.py`: byte accounting, tied-weight packing, QAT export, zlib/zstd round-trip checks, record-folder scaffolding.
13. `bpb_audit.py`: byte-length accounting, validation-order checks, normalized-distribution tests, seed-bruteforce guards.
14. `visualization.py`: spiral projection, tropical cells, root graphs, braid/Coxeter trajectories, reward landscapes.
15. `leakage.py`: text shingles, graph hashes, algebraic normal forms, root-family cluster splits.

19 Discussion and limits

ToricGT is intentionally finite. It learns finite presentations, finite approximants, finite graph algorithms, finite root-template analyses, and finite proof graphs. The operator-algebraic layer supplies structure and tests, not a claim that a 35M parameter model contains $\mathcal{A}_\theta$ as an infinite C^* -algebra. The Hebrew layer supplies an explicit graph factorization of morphology, not a claim that every ambiguous biblical form has a unique analysis. The PolarQuant layer supplies a plausible and mathematically analyzable cache-compression path for long-context inference, not a claim that every graph reasoning task is insensitive to quantization.

The practical advantage of this framing is falsifiability. Soft-MoE routing can be inspected through slot entropy and expert mass rather than treated as magic capacity. Parameter-Golf claims can be inspected through exact byte accounting, run logs, and validation rules rather than informal model-size estimates. If the model violates relabeling equivariance, the error is measured. If tropical heads collapse to a single global key, active-face entropy shows it. If toric channels memorize denominators, held-out q intervals reveal it. If Hebrew root abstraction fails, held-out root families and paradigm completion expose it. If PolarQuant breaks long-context retrieval, margin-preservation and exact-vs-quantized graph outputs show where.

20 A Look Ahead

This section is a concrete plan for the next ToricGT iteration after the present base model has completed training. It does not require changing the current training run. The central change is methodological: use toric geometry not merely as an explanatory language after the fact, but as a source of supervised tasks, auxiliary losses, checkpoint audits, and inference-time search constraints.

20.1 Checkpoint audit before retraining

The first step is to turn the trained checkpoint into a measurable geometric object. For each evaluation family, record hidden states h_i , tropical candidate scores $\ell_r(h_i)$, active faces $A(h_i)$, Soft-MoE combine masses, graph labels, and correctness. Then construct empirical toric shadows $\hat{\Sigma}_{\mathcal{G}}$ for selected layers and heads. The audit should report:

1. occupied fan-cell count and entropy;
2. mean and minimum active-face margin;
3. within-cell affine residual $\sum_{h_i \in \sigma} |\psi(h_i) - \langle \hat{m}_\sigma, h_i \rangle|^2$;
4. bend magnitudes $\hat{B}(\tau)$ across high-traffic walls;

5. correlation between bend changes and task-level reasoning errors;
6. equivariance of fan cells under graph relabeling.

This audit separates two failure modes that ordinary validation loss merges. A model may know the answer but use unstable walls, which predicts poor out-of-distribution behavior. Conversely, a model may have clean fan structure but poor task calibration, in which case fine-tuning should target heads and decoders rather than the core encoder.

20.2 Toric data curriculum

The next data pass should add explicit toric-geometric tasks alongside the existing graph, algebraic, Hebrew, and reasoning corpora. The recommended generators are:

1. **Newton-polytope active-face tasks:** sample exponent sets $A = \{a_r\}$, biases b_r , and hidden probes h ; predict the active face, top-two margin, normal cone, and moment $\mu_\beta(h)$.
2. **Cartier-divisor bend tasks:** sample rational fans and support functions; predict slope vectors m_σ , wall bends $\langle m_\sigma - m_{\sigma'}, u_\tau \rangle$, and consistency of repeated walls.
3. **Toric ideal and binomial relation tasks:** sample exponent matrices and integer kernel relations; predict whether two monomial paths represent the same character and verify binomial constraints.
4. **ReLU fan realization tasks:** sample shallow and low-depth rational ReLU networks, construct their canonical polyhedral complexes, and predict whether a given finitely piecewise-linear function satisfies the equal-bend criterion for shallow unbiased realization.
5. **Toric graph-of-thought tasks:** serialize the above objects as typed graphs with cone, ray, face, divisor, monomial, and wall nodes, so the same graph-token machinery handles polyhedral geometry and ordinary reasoning records.

These tasks should be held out by fan combinatorial type, number of rays, Newton-polytope dimension, relation-rank, and wall-equivalence class. Random example-level splits are especially weak here because adjacent points in a normal fan can share almost all combinatorial data.

20.3 Affine toric charts and Koszul persistence modules

Toric geometry also supplies a commutative-algebra interface for the directed persistence machinery. Let N be the cocharacter lattice and $M = \text{Hom}(N, \mathbb{Z})$ the character lattice. For a rational polyhedral cone $\sigma \subset N_{\mathbb{R}}$, the associated affine toric chart is

$$U_\sigma = \text{Spec } k[\sigma^\vee \cap M], \quad (20.1)$$

where $k[\sigma^\vee \cap M]$ is the semigroup algebra generated by characters whose exponents lie in the dual cone. In ToricGT, σ is not chosen abstractly: it is induced by a tropical active face, a Newton normal cone, or an empirical fan cell discovered in the hidden states. Thus a local reasoning window can be treated as a finite sample over a concrete affine chart rather than as an unstructured point cloud.

This is the bridge to multiparameter persistence. A finite n -parameter persistence module can be represented as a finitely generated $\mathbb{N}^n$ -graded module over

$$R = k[x_1, \dots, x_n], \quad (20.2)$$

where the variables act by the structure maps of the filtration [7]. ToricGT has several natural filtration parameters: reasoning step, graph distance, Vietoris–Rips radius, HDBSCAN mutual-reachability threshold, tropical margin threshold, and noncommutative phase distance. When a toric chart is active, the polynomial ring can be replaced locally by

$$R_\sigma = k[\sigma^\vee \cap M], \quad (20.3)$$

so the persistence module is graded by the same semigroup directions that define the local toric geometry.

Let $a_1, \dots, a_r$ be polynomial or semigroup parameters acting on such a finite module M_{pers} . The Koszul complex is

$$K_q(a; M_{\text{pers}}) = M_{\text{pers}} \otimes \bigwedge^q k^r, \quad (20.4)$$

with differential

$$\begin{aligned} d(m \otimes e_{i_1} \wedge \cdots \wedge e_{i_q}) &= \sum_{s=1}^q (-1)^{s-1} a_{i_s} m \\ &\quad \otimes e_{i_1} \wedge \cdots \wedge \widehat{e_{i_s}} \wedge \cdots \wedge e_{i_q}. \end{aligned} \quad (20.5)$$

Its homology computes

$$H_q(K(a; M_{\text{pers}})) \cong \text{Tor}_q^R(R/(a_1, \dots, a_r), M_{\text{pers}}). \quad (20.6)$$

If $a_1, \dots, a_r$ behave like clean local parameters for the observed reasoning module, higher Koszul homology should be small or structurally predictable. If higher homology grows, if Fitting minors jump across adjacent chart cells, or if multigraded Betti mass shifts erratically under graph relabeling, then the model’s claimed toric/persistent coordinates are not yet a reliable explanation of the reasoning trajectory.

20.4 Finite combinatorial algebra bridge

The train-time version of the previous paragraph is deliberately finite. For a hidden window $H = (h_1, \dots, h_n)$, ToricGT forms a small combinatorial commutative-algebra/topology certificate

$$\mathcal{C}(H) = (A, \Delta, \mathcal{R}, C_\bullet, \partial_\bullet, T_1, \dots, T_r, \mathcal{F}_1 \subset \cdots \subset \mathcal{F}_L). \quad (20.7)$$

Here $A = \{a_1, \dots, a_m\} \subset \mathbb{Z}^s$ is a fixed exponent configuration, Δ is a chamber or fan complex, $\mathcal{R}$ is a low-degree toric-binomial relation set, $(C_\bullet, \partial_\bullet)$ is a finite chain complex, the T_i are local operators used for Koszul differentials, and $\mathcal{F}_\ell$ are filtered flag complexes extracted from the reasoning trajectory. The certificate is exact only when $Au = Av$ for every $x^u - x^v \in \mathcal{R}$, $\partial_{q-1}\partial_q = 0$, $\mathcal{F}_\ell \subseteq \mathcal{F}_{\ell+1}$, and the T_i commute whenever a Koszul exactness claim is made.

The toric component comes from the monomial map

$$\varphi_A : k[x_1, \dots, x_m] \rightarrow k[t_1^{\pm 1}, \dots, t_s^{\pm 1}], \quad \varphi_A(x_i) = t^{a_i}, \quad (20.8)$$

with toric ideal

$$I_A = \ker \varphi_A = \langle x^u - x^v : Au = Av \rangle. \quad (20.9)$$

Training uses only a short Markov-basis shadow: degree-two or otherwise low-degree relations $a_i + a_j \approx a_k + a_l$ become a normalized binomial residual on chamber logits. The chamber component is the Stanley–Reisner face ring

$$k[\Delta] = k[x_1, \dots, x_m]/I_\Delta, \quad I_\Delta = \langle x_F : F \notin \Delta \rangle. \quad (20.10)$$

Soft chamber coactivation on nonfaces gives $\mathcal{L}_{\text{SR}}$, while exact sidecar audits compute forbidden hard edges, Euler characteristic, and finite-field Betti ranks. Hochster’s formula supplies the algebraic reference:

$$\beta_{i,\sigma}(k[\Delta]) = \dim_k \tilde{H}^{|\sigma|-i-1}(\Delta_\sigma; k). \quad (20.11)$$

The implemented bridge is the bounded auxiliary

$$\begin{aligned} \mathcal{L}_{\text{CCA-top}} = & w_{\text{binom}} \mathcal{L}_{\text{binom}} + w_{\text{SR}} \mathcal{L}_{\text{SR}} + w_H(1 - H(C)) \\ & + w_{\text{bal}} \mathcal{L}_{\text{balance}} + w_\chi |\chi_{\text{proxy}}|/m + w_K \mathcal{L}_{\text{Koszul}} + w_T \mathcal{L}_{\text{top}}. \end{aligned} \quad (20.12)$$

The code path is `src/toricgt/combinatorial_toric_metrics.py`; it returns `toric_cca_topology_loss` and detached diagnostics such as `toric_cca_binomial_residual`, `toric_cca_stanley_reisner_nonface_mass`, `toric_cca_betti0_proxy`, `toric_cca_betti1_proxy`, `toric_cca_koszul_loss`, and `toric_cca_topology_loss`. The BPB-first scratch contract uses these quantities from optimizer step 0: `ADVANCED_LOSS_START_STEP=0`, no validation-BPB gate in front of metric computation, a long auxiliary warmup, and a cross-entropy-ratio cap. The early gradient is therefore nonzero but tiny, while exact finite audits decide whether later phases may increase frequency or weight. This keeps the commutative algebra rigorous without letting it overpower the byte-level objective.

The implementation now includes a full symbolic multigraded resolution for the finite Stanley–Reisner ideal used by this bridge. Let $S = k[x_1, \dots, x_m]$ with $\mathbb{Z}^m$ grading $\deg(x_i) = e_i$, and let

$$I_\Delta = \langle x_F = \prod_{i \in F} x_i : F \notin \Delta \rangle.$$

For the face ring $k[\Delta] = S/I_\Delta$, the sidecar computes the exact minimal multigraded Betti table over $\mathbb{F}_2$ using Hochster’s formula

$$\beta_{i,\sigma}(k[\Delta]) = \dim_{\mathbb{F}_2} \tilde{H}_{|\sigma|-i-1}(\Delta_\sigma; \mathbb{F}_2).$$

It also records the Taylor free resolution of I_Δ : if $I_\Delta = \langle m_1, \dots, m_g \rangle$, the degree- p Taylor module has one basis vector e_J for every p -subset J of generators, multidegree $\text{lcm}(m_j : j \in J)$, and differential

$$d(e_J) = \sum_{r=1}^p (-1)^{r-1} \frac{\text{lcm}(m_j : j \in J)}{\text{lcm}(m_j : j \in J \setminus \{j_r\})} e_{J \setminus \{j_r\}}.$$

This Taylor complex is a full symbolic multigraded free resolution and carries the usual DG-algebra structure: $d^2 = 0$, $d(ab) = d(a)b + (-1)^{|a|}ad(b)$, and the multiplication of basis elements is governed by lcm multidegrees. The Hochster table gives the minimal Betti numbers, projective dimension, regularity, and nonminimality gap.

The exact symbolic data are discrete, but the train-time maps are differentiable because they are polynomial evaluations over soft chamber coordinates. With

$$x_i(H) = \frac{1}{n} \sum_t p_i(h_t),$$

the Stanley–Reisner generator loss is $\text{mean}_{F \in \mathcal{G}(I_\Delta)} \prod_{i \in F} x_i(H)$, Taylor lcm-syzygy mass is the corresponding average over $\text{lcm}(m_a, m_b)$, full Taylor multidegree mass averages over all positive-degree Taylor basis elements using exact compressed multiplicities, and DG augmentation mass measures the positive-degree Taylor ideal evaluated on the same soft variables. The Hilbert/Betti pressure multiplies these polynomial maps by constants derived from the exact Betti table, projective dimension, and regularity. Thus the symbolic multigraded ring is used exactly for audits and differentially

for optimization. The BPB hypothesis is that these losses lower next-byte conditional entropy by forcing hidden byte features into cleaner multigraded factors; any promotion is accepted only when matched OAI validation BPB is improved or unchanged.

The corresponding audit metrics are deliberately literal:

```
toric_affine_chart_id
toric_semigroup_generator_coverage
koszul_exactness_residual
koszul_homology_rank_by_chart
toric_syzygy_residual
fitting_minor_rank_residual
buchsbaum_eisenbud_rank_residual
buchsbaum_eisenbud_multiplier_residual
multigraded_betti_mass
```

Here the Buchsbaum–Eisenbud multiplier residual is a sampled complementary-minor test for a finite two-step complex

$$C_2 \xrightarrow{d_2} C_1 \xrightarrow{d_1} C_0. \quad (20.13)$$

Exactness at C_1 requires $\text{rank}(d_1) + \text{rank}(d_2) = \dim C_1$, and the multiplier relations compare maximal minors of d_1 with complementary maximal minors of d_2 up to scalar factors. The implemented audit samples complementary edge-index sets over $\mathbb{F}_2$ and counts multiplier mismatches, while the differentiable train-time expression penalizes d_K^2 , local action commutators, and regularized rank-condition failures. Only after exact small-window audits over finite fields agree with these differentiable polynomial/rank evaluations should their weights be increased. A conservative later-stage loss is

$$\mathcal{L}_{\text{Koszul}} = \lambda_{\text{dga}} \|d_K^2\|_F^2 + \lambda_{\text{Tor}} \sum_q \left\| \hat{\beta}_{q,\bullet} - \beta_{q,\bullet}^* \right\|_1 + \lambda_{\text{Fitt}} \mathcal{L}_{\text{minor}} + \lambda_{\text{BE}} \mathcal{L}_{\text{BE}}, \quad (20.14)$$

where $\mathcal{L}_{\text{BE}}$ penalizes Buchsbaum–Eisenbud-style rank and minor violations in small free-resolution audits. This is intentionally an audit-first layer. For Parameter Golf, the deployable artifact should not pay bytes for Koszul probes unless an ablation shows a clear BPB or reasoning-quality improvement.

20.5 Skeptic gate and ablation discipline

The practical antidote to overfitting the theory is a hard gate: no advanced geometric object receives more than micro-loss status unless it has a logged metric, an ablation, and a plot path. The named “there be dragons” onlooker is not a model component, prompt role, reward term, or hidden observer; repository search verifies it is absent from executable paths outside ignored output/checkpoint/data directories. More importantly, the scientific guardrail is positive rather than rhetorical:

1. exact small algebraic or topological audits must pass on toy windows;
2. differentiable polynomial/rank evaluations must agree with those audits within tolerance;
3. enabling the auxiliary loss must not damage validation BPB, score-first causality, or held-out reasoning metrics.

If an object fails this gate, it remains a visualization or diagnostic. This rule keeps the toric, Coxeter, noncommutative, and Koszul layers falsifiable instead of decorative.

20.6 Affine Coxeter, braid, and toric phase foliations

The next iteration should also make explicit the Lie-theoretic structure that sits naturally next to the toric layer. A toric variety by itself is controlled by a lattice and a fan; a reductive Lie group with maximal torus T adds a root datum. This extra root datum is the precise bridge from toric geometry to Weyl chambers, affine Coxeter systems, and braid actions. Let

$$M = \text{Hom}(T, \mathbb{G}_m), \quad N = \text{Hom}(\mathbb{G}_m, T) \quad (20.15)$$

be the character and cocharacter lattices, and let $\Phi \subset M$ be a finite root system. Each root $\alpha \in \Phi$ defines a wall in $N_{\mathbb{R}}$,

$$H_{\alpha} = \{x \in N_{\mathbb{R}} : \langle \alpha, x \rangle = 0\}. \quad (20.16)$$

Reflections across these walls generate the Weyl group W . Translating the walls by integer levels gives the affine arrangement

$$H_{\alpha,k} = \{x \in N_{\mathbb{R}} : \langle \alpha, x \rangle = k\}, \quad \alpha \in \Phi, \ k \in \mathbb{Z}, \quad (20.17)$$

and the corresponding affine Weyl group

$$W_{\text{aff}} = Q^{\vee} \rtimes W, \quad (20.18)$$

where $Q^{\vee}$ is the coroot lattice [29]. In ToricGT terms, Newton normal fans and tropical active-face decompositions give the polyhedral chamber geometry; root hyperplanes add labeled reflection walls; and affine translations give a principled way to extend finite Coxeter tasks to unbounded but still structured reasoning families. This is the rigorous sense in which toric geometry leads to affine Coxeter structure: not every toric fan carries a root system, but once the relevant character lattice and root datum are specified, the fan/chamber machinery becomes the natural coordinate system for affine reflections and their walls.

Braid groups enter through ordered wall crossings. The Artin braid generator σ_i can be treated as a graph-of-thought edit that crosses or winds around a specified adjacent wall while preserving the appropriate Coxeter projection. A useful synthetic task is therefore not merely to reduce braid words, but to predict the chamber path:

$$C_0 \xrightarrow{\sigma_{i_1}^{\epsilon_1}} C_1 \xrightarrow{\sigma_{i_2}^{\epsilon_2}} \dots \xrightarrow{\sigma_{i_T}^{\epsilon_T}} C_T, \quad (20.19)$$

along with the associated tropical margin at each crossing and the induced affine reflection when the path projects to the Coxeter group. The held-out families should include braid length, affine rank, wall multiplicity, and chamber distance. The model already has the right primitive actions: braid generators, affine Coxeter reflections, tropical active-face selection, and toric clock/shift operations. The next iteration should bind them together in a single typed graph schema with chamber, wall, root, coroot, generator, and braid-path nodes.

The noncommutative torus adds a complementary phase-foliation view. For the rotation algebra $\mathcal{A}_{\theta}$,

$$VU = e^{2\pi i \theta} UV, \quad (20.20)$$

ordinary commutative projection forgets operator order and keeps only the degree $(a, b) \in \mathbb{Z}^2$ of a word $U^a V^b$. The projective cocycle keeps the missing information: a word reduction also accumulates a phase exponent c ,

$$W \mapsto e^{2\pi i c \theta} U^a V^b. \quad (20.21)$$

Projecting this phase memory to an ordinary torus produces finite diagnostic leaves. For irrationally related θ and β , define

$$\gamma(k) = \left(e^{2\pi i k \theta}, e^{2\pi i k \beta} \right) \in \mathbb{T}^2. \quad (20.22)$$

By Kronecker density, $\gamma(\mathbb{Z})$ is dense in the commutative torus when $1, \theta, \beta$ are rationally independent. Geometrically, the projected phase path is a leaf of an irrational linear foliation of $\mathbb{T}^2$; rational Weyl-pair approximants p/q close the leaf into a finite periodic orbit. Thus noncommutative toric memory can be audited by asking whether reasoning trajectories follow smooth projected phase leaves between justified wall crossings:

$$E_{\text{leaf}} = \sum_t \text{dist}_{\mathbb{T}^2}(\Pi_\theta(h_{t+1}), R_{\Delta_t} \Pi_\theta(h_t))^2, \quad (20.23)$$

where Π_θ is the learned toric phase projection and R_{Δ_t} is the expected rotation increment from the graph action at step t . A small E_{leaf} means the phase channel behaves like a coherent projective memory; a large value means the model is using the sinusoidal channel incoherently. This remains an audit shadow, not a claim that a finite neural network represents the full irrational rotation algebra faithfully.

20.7 Slepian concentration on toric leaves

The phase-foliation audit can be sharpened by asking whether the finite projected leaf is time-band concentrated. Classical prolate spheroidal wave functions solve an extremal concentration problem: among bandlimited functions, they maximize energy inside a time window. The discrete version is the Slepian or DPSS basis [27]. For a finite trajectory of length N and normalized half-bandwidth $W \in (0, 1/2)$, define the time-band limiting matrix

$$K_W[m, n] = \begin{cases} 2W, & m = n, \\ \frac{\sin(2\pi W(m - n))}{\pi(m - n)}, & m \neq n. \end{cases} \quad (20.24)$$

Its leading eigenvectors $q_1, \dots, q_J$ are the discrete prolate spheroidal sequences and its eigenvalues $\lambda_j \in [0, 1]$ measure spectral concentration in the prescribed band. Given a projected noncommutative-torus phase path

$$z_k = (e^{2\pi i u_k}, e^{2\pi i v_k}) \in \mathbb{T}^2 \quad (20.25)$$

we form a real probe signal from low-order characters and cocycle-like differences, for example

$$s_k = \cos(2\pi u_k) + \frac{3}{4} \sin(2\pi v_k) + \frac{4}{5} \cos(2\pi(u_k - v_k)), \quad (20.26)$$

optionally weighted by local reasoning energy such as per-token negative log likelihood. With coefficients $c_j = \langle s, q_j \rangle$, the finite Slepian concentration score is

$$C_{\text{sl}}(s) = \frac{\sum_{j=1}^J \lambda_j |c_j|^2}{\sum_{j=1}^J |c_j|^2 + \epsilon}, \quad L_{\text{sl}}(s) = 1 - C_{\text{sl}}(s). \quad (20.27)$$

The companion mode entropy

$$H_{\text{sl}}(s) = -\frac{1}{\log J} \sum_{j=1}^J p_j \log(p_j + \epsilon), \quad p_j = \frac{|c_j|^2}{\sum_r |c_r|^2 + \epsilon}, \quad (20.28)$$

separates a coherent low-dimensional phase leaf from a diffuse phase pattern. In the current implementation this is an audit and visualization metric rather than a training loss. It appears in the geometry suite as a toric Slepian panel: concentration spectrum, phase-signal reconstruction, local NLL energy, torus-leaf scatter, and branch-level BPB versus concentration. This is also the mathematically controlled version of the musical analogy: a toric phase path with high Slepian concentration has stable, localized oscillatory content; rendering it as an audio envelope is an intelligible sonification of phase coherence, not evidence by itself.

20.8 Fine-tuning objective

Let $\mathcal{L}_{\text{base}}$ be the existing supervised and GFlowNet objective. A toric fine-tuning phase can use

$$\begin{aligned} \mathcal{L}_{\text{toric-ft}} = & \mathcal{L}_{\text{base}} + \lambda_{\text{face}} \mathcal{L}_{\text{face}} + \lambda_{\text{fan}} \mathcal{L}_{\text{fan}} + \lambda_{\text{bend}} \mathcal{L}_{\text{bend}} \\ & + \lambda_{\text{binom}} \mathcal{L}_{\text{binom}} + \lambda_{\text{moment}} \mathbb{E} \|\hat{\mu}_{\beta} - \mu_{\beta}^*\|_2^2 + \lambda_{\text{eqfan}} \mathbb{E}_{\pi} d_{\text{fan}}(\hat{\Sigma}(G), P_{\pi} \hat{\Sigma}(\pi G)). \end{aligned} \quad (20.29)$$

Here $\mathcal{L}_{\text{face}}$ is cross-entropy over active faces or face dimensions, $\mathcal{L}_{\text{fan}}$ is the fan-margin hinge loss, $\mathcal{L}_{\text{bend}}$ enforces repeated-wall consistency, and $\mathcal{L}_{\text{binom}}$ enforces integer relation consistency in probe logits. The fan distance d_{fan} can be implemented by comparing active-face ids and margins after relabeling, avoiding expensive exact polyhedral isomorphism during training.

For compactness, the exponent probes should be low-rank and quantized. Let

$$A = UV^{\top}, \quad U \in \mathbb{R}^{R \times r}, \quad V \in \mathbb{R}^{d \times r}, \quad r \ll d. \quad (20.30)$$

The probe cost is $O(r(R + d))$ rather than $O(Rd)$, and an int8 or int6 export can store the probe without threatening a Parameter-Golf artifact. This is the same principle as low-rank Soft-MoE adapters: add geometric structure only where it buys measurable reasoning stability per byte.

20.9 Continuous GFlowNets on toric charts

The current GFlowNet acts on embedding-space graph states. The next iteration should make the continuous part explicit by augmenting the state with moment-map and fan coordinates:

$$s_t = (G_t, H_t, \mu_t, A_t, \hat{\Sigma}_t, m_t). \quad (20.31)$$

Actions are hybrid. Discrete actions add graph-of-thought nodes, select proof obligations, choose analyzer hypotheses, or apply algebraic generators. Continuous actions move inside a normal cone, move along a wall, or propose a new point in the Newton polytope:

$$\mu_{t+1} = \Pi_{P_{\Pi}}(\mu_t + \epsilon v_t), \quad v_t \sim q_{\phi}(\cdot \mid s_t), \quad (20.32)$$

where $\Pi_{P_{\Pi}}$ is projection to the polytope. Continuous GFlowNet theory provides the density-based analogue of trajectory balance [35]. For a hybrid trajectory τ , use

$$\mathcal{L}_{\text{CTB}}(\tau) = \left(\log Z + \sum_t \log p_F(s_{t+1} \mid s_t) - \log R(x) - \sum_t \log p_B(s_t \mid s_{t+1}) \right)^2, \quad (20.33)$$

with densities for continuous moves and probabilities for discrete moves. The reward should combine task correctness, verifier score, fan-margin stability, bend consistency, novelty, and complexity:

$$R(x) = \exp \left(\frac{C(x) + \alpha V(x) + \beta \Delta_{\text{fan}}(x) - \eta E_{\text{bend}}(x) - \kappa H(x)}{\tau} \right). \quad (20.34)$$

This gives inference-time scaling a geometric search space. Rather than sampling arbitrary latent perturbations, the model explores cells, walls, and faces that correspond to identifiable changes in reasoning.

20.10 Retraining protocol

The recommended next iteration has four stages.

1. **Frozen audit:** run the toric shadow audit on the current checkpoint; decide which layers and task families have unstable fan structure.
2. **Probe-only fine-tuning:** train low-rank toric probes and diagnostic heads while freezing the main encoder. This establishes whether the existing representation already contains recoverable toric structure.
3. **Adapter fine-tuning:** unfreeze Soft-MoE adapters, tropical heads, and small toric probes; optimize $\mathcal{L}_{\text{toric-ft}}$ on the mixed curriculum.
4. **Scratch retraining decision:** retrain from scratch only if probe-only and adapter fine-tuning reveal that early layers lack stable fan cells on synthetic toric tasks. Otherwise, continue from the present base model and spend compute on inference-time scaling and distillation.

For the Parameter-Golf track, the practical target is not a large toric module. It is a small model whose hidden computation has auditable fan structure: quantized exponent probes, recurrent block sharing, compact Soft-MoE adapters, and a score-before-update inference-time adaptation rule. Tropical compression work suggests that Newton-polytopal summaries can guide structured pruning without access to training data [5]; ToricGT should use that idea conservatively, as a post-training audit and compression hint rather than as a substitute for validation BPB. The metric remains BPB under the artifact cap, but toric diagnostics become pre-submission gates: a model that improves BPB by exploiting unstable validation-specific behavior should fail the fan and leakage audits.

21 Conclusion

The extended ToricGT framework gives a rigorous path from graph-tokenized Transformers to algebraic, tropical, toric-geometric, and morphological graph reasoning. The central mathematical claims are exact finite statements: tokenization and layers are equivariant; tropical ring attention exactly equals full tropical attention; max-plus heads simulate bounded semiring algorithms; active faces are cells in normal fans of Newton polytopes; affine toric charts and Koszul complexes give audit-ready commutative-algebra diagnostics for persistent reasoning modules; finite Weyl pairs and cocycles provide controlled toric features; root-template Hebrew morphology becomes a typed graph problem; Soft-MoE blocks preserve graph equivariance while routing typed computations; Parameter-Golf compression defines a separate micro-LM deployment path with byte-level constraints; and PolarQuant-style cache compression admits explicit attention perturbation bounds. The resulting research program is small enough for single-GPU experimentation yet structured enough to support serious mathematical diagnostics.

A Additional proof details

A.1 Hybrid universal approximation

Theorem A.1 (Hybrid ToricGT universality). *Let F be a continuous equivariant graph-to-graph map on a bounded compact graph domain. A ToricGT model with at least one ordinary ReLU feed-forward path or softmax attention path and any number of tropical, toric, Hebrew, or PolarQuant-compatible residual paths can approximate F uniformly while preserving equivariance.*

Proof. By graph-to-graph universality, an equivariant TokenGT approximant exists using ordinary Transformer blocks. Add the additional paths as residual maps. Initialize their output projections to zero or arbitrarily small norm, so the augmented model initially equals or approximates the original approximant. Every added path is equivariant by the preceding lemmas when its masks, transports, and quantizers are shared or equivariant. A sum of equivariant maps is equivariant, and the approximation error can be kept below ε by choosing the original approximant error below $\varepsilon/2$ and the residual perturbation below $\varepsilon/2$. $\square$

A.2 Softmax perturbation with quantized keys

Lemma A.2 (Softmax attention perturbation). *Let rows of V and $\hat{V}$ be bounded by R_V in ℓ_∞ , and suppose $\|S - \hat{S}\|_\infty \leq \epsilon_S$ and $\|V - \hat{V}\|_\infty \leq \epsilon_V$. Then a single softmax head satisfies*

$$\left\| \text{softmax}(S)V - \text{softmax}(\hat{S})\hat{V} \right\|_\infty \leq C_L R_V \epsilon_S + \epsilon_V, \quad (\text{A.1})$$

where C_L is a Lipschitz constant for row-wise softmax on L entries.

Proof. Add and subtract $\text{softmax}(\hat{S})V$:

$$\left\| \text{softmax}(S)V - \text{softmax}(\hat{S})\hat{V} \right\|_\infty \leq \left\| (\text{softmax}(S) - \text{softmax}(\hat{S}))V \right\|_\infty + \left\| \text{softmax}(\hat{S})(V - \hat{V}) \right\|_\infty. \quad (\text{A.2})$$

The second term is at most ϵ_V because each softmax row is a probability vector. The first term is bounded by the Lipschitz constant of softmax times ϵ_S times the value bound. This yields the claim. $\square$

B Graph record schema

A recommended JSONL record has fields

`id, source, task_family, nodes, edges, targets, metadata, split_cluster`

Each node contains a stable local id, type, symbolic payload, numerical features, source span, and optional uncertainty. Each edge contains source id, target id, type, directionality, numerical features, and optional proof or analyzer metadata. Targets include graph-level labels, node labels, edge labels, next-state graphs, answer strings, verifier scores, GFlowNet rewards, and visualization payloads.

For Hebrew records, node types include `root`, `radical`, `template`, `binyan`, `feature`, `surface`, `lemma`, `gloss`, `span`, and `hypothesis`. Edge types include `has_radical`, `fills_slot`, `has_feature`, `attested_at`, `same_root`, and `paradigm_member`.

C Recommended hyperparameters

Setting	Value	Notes
Validation model	2 layers, $d = 64$	CPU-only shape and equivariance tests
8M model	6 layers, $d = 256$	first real training run
15M model	8 layers, $d = 384$	preferred single-4090 target
35M model	12 layers, $d = 512$	checkpointing and careful memory profiling
Attention block size	128–512	tune by sequence length and memory
Tropical heads	25–50% of heads after warmup	avoid early collapse
Torus regularizer	small, delayed	introduce after normal forms are learned
Hebrew loss weight	curriculum-dependent	start with analyzer-supervised tasks
Soft-MoE full model	$E = 4\text{--}8$, $S = 1\text{--}4$	enabled by default in upper layers; monitor expert mass and slot entropy
Dense Parameter-Golf	$d = 384$, 7 unique blocks, 2 recurrent passes	random-order byte AR, hybrid attention, tied embeddings, compact GFlowNet actions, target under 15.6MB artifact bytes
Soft-MoE Parameter-Golf	off by default	enable only as low-rank adapter ablation after dense BPB baseline is stable
PolarQuant cache	inference/eval first	compare full KV vs compressed cache
Optimizer	AdamW	clipping at 1.0, cosine decay
Precision	bf16	fallback to fp16/fp32 if unsupported
Splits	clustered 80/10/10	no random record-level split

References

- [1] Yaoying Fu. Toric geometry of ReLU neural networks. arXiv:2509.05894, 2025.
- [2] Liwen Zhang, Gregory Naitzat, and Lek-Heng Lim. Tropical geometry of deep neural networks. In *ICML*, Proceedings of Machine Learning Research 80:5824–5832, 2018. arXiv:1805.07091.
- [3] Marie-Charlotte Brandenburg, Georg Loho, and Guido Montufar. The real tropical geometry of neural networks. arXiv:2403.11871, 2024.
- [4] Christian Haase, Christoph Hertrich, and Georg Loho. Lower bounds on the depth of integral ReLU neural networks via lattice polytopes. In *ICLR*, 2023. arXiv:2302.12553.
- [5] Konstantinos Fotopoulos, Petros Maragos, and Panagiotis Misiakos. TropNNC: Structured neural network compression using tropical geometry. arXiv:2409.03945, 2024.

- [6] David A. Cox, John B. Little, and Henry K. Schenck. *Toric Varieties*. Graduate Studies in Mathematics 124. American Mathematical Society, 2011.
- [7] Amelie Schreiber. Multiparameter persistent homology: Generic structures and quantum computing. arXiv:2210.11433, 2022.
- [8] Shengchao Liu, Chengpeng Wang, Jiarui Lu, Weili Nie, Hanchen Wang, Zhuoxinran Li, Bolei Zhou, and Jian Tang. Unsupervised discovery of steerable factors when graph deep generative models are entangled. *Transactions on Machine Learning Research*, 2024. arXiv:2401.17123.
- [9] Gouki Minegishi, Jingyuan Feng, Hiroki Furuta, Takeshi Kojima, Yusuke Iwasawa, and Yutaka Matsuo. Emergent analogical reasoning in Transformers. arXiv:2602.01992, 2026.
- [10] Christina Lu, Jack Gallagher, Jonathan Michala, Kyle Fish, and Jack Lindsey. The Assistant Axis: Situating and Stabilizing the Default Persona of Language Models. arXiv:2601.10387, 2026.
- [11] Amelie Schreiber. Tropical Quivers of Architectures: a research program for composed embedding-space models. GitHub repository https://github.com/amelie-iska/Tropical_Quivers_of_Archs, 2026.
- [12] Herbert Edelsbrunner, David Letscher, and Afra Zomorodian. Topological persistence and simplification. *Discrete & Computational Geometry*, 28:511–533, 2002.
- [13] Afra Zomorodian and Gunnar Carlsson. Computing persistent homology. *Discrete & Computational Geometry*, 33:249–274, 2005.
- [14] Gunnar Carlsson. Topology and data. *Bulletin of the American Mathematical Society*, 46(2):255–308, 2009.
- [15] David Cohen-Steiner, Herbert Edelsbrunner, and John Harer. Stability of persistence diagrams. *Discrete & Computational Geometry*, 37:103–120, 2007.
- [16] Frédéric Chazal, Vin de Silva, Marc Glisse, and Steve Oudot. *The Structure and Stability of Persistence Modules*. SpringerBriefs in Mathematics. Springer, 2016.
- [17] Mamdouh S. Mohamed, Anil N. Hirani, and Ravi Samtaney. Discrete exterior calculus discretization of incompressible Navier-Stokes equations over surface simplicial meshes. *Journal of Computational Physics*, 312:175–191, 2016. arXiv:1508.01166.
- [18] Ricardo J. G. B. Campello, Davoud Moulavi, and Jörg Sander. Density-based clustering based on hierarchical density estimates. In *PAKDD*, Lecture Notes in Computer Science 7819:160–172, 2013.
- [19] Ricardo J. G. B. Campello, Davoud Moulavi, Arthur Zimek, and Jörg Sander. Hierarchical density estimates for data clustering, visualization, and outlier detection. *ACM Transactions on Knowledge Discovery from Data*, 10(1):1–51, 2015.
- [20] Leland McInnes, John Healy, and Steve Astels. hdbscan: Hierarchical density based clustering. *Journal of Open Source Software*, 2(11):205, 2017.
- [21] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *NeurIPS*, 2017.

- [22] Chulhee Yun, Srinadh Bhojanapalli, Ankit Singh Rawat, Sanjiv Kumar, and Sashank J. Reddi. Are Transformers universal approximators of sequence-to-sequence functions? *ICLR*, 2020. arXiv:1912.10077.
- [23] Jinwoo Kim, Tien Dat Nguyen, Seonwoo Min, Sungjun Cho, Moontae Lee, Honglak Lee, and Seunghoon Hong. Pure Transformers are powerful graph learners. *NeurIPS*, 2022. arXiv:2207.02505.
- [24] Hao Liu, Matei Zaharia, and Pieter Abbeel. Ring Attention with blockwise Transformers for near-infinite context. arXiv:2310.01889, 2023.
- [25] Baran Hashemi, Kurt Pasque, Chris Teska, and Ruriko Yoshida. Tropical Attention: Neural algorithmic reasoning for combinatorial algorithms. *NeurIPS*, 2025. arXiv:2505.17190.
- [26] Marc A. Rieffel. C^* -algebras associated with irrational rotations. *Pacific Journal of Mathematics*, 93(2):415–429, 1981.
- [27] David Slepian. Prolate spheroidal wave functions, Fourier analysis, and uncertainty V: The discrete case. *Bell System Technical Journal*, 57(5):1371–1430, 1978.
- [28] Marc A. Rieffel. Projective modules over higher-dimensional non-commutative tori. *Canadian Journal of Mathematics*, 40(2):257–338, 1988.
- [29] James E. Humphreys. *Reflection Groups and Coxeter Groups*. Cambridge University Press, 1990.
- [30] Mihai Pimsner and Dan Voiculescu. Imbedding the irrational rotation C^* -algebra into an AF-algebra. *Journal of Operator Theory*, 4:201–210, 1980.
- [31] Alain Connes. C^* -algebres et geometrie differentielle. *Comptes Rendus de l’Academie des Sciences*, 290:599–604, 1980.
- [32] Yoshua Bengio, Salem Lahlou, Tristan Deleu, Edward J. Hu, Mo Tiwari, and Emmanuel Bengio. GFlowNet foundations. *Journal of Machine Learning Research*, 24(210):1–55, 2023.
- [33] Nikolay Malkin, Moksh Jain, Emmanuel Bengio, Chen Sun, and Yoshua Bengio. Trajectory balance: Improved credit assignment in GFlowNets. arXiv:2201.13259, 2022.
- [34] Kanika Madan, Jarrod Rector-Brooks, Maksym Korablyov, Emmanuel Bengio, Moksh Jain, Andrei Cristian Nica, Tom Bosc, Yoshua Bengio, and Nikolay Malkin. Learning GFlowNets from partial episodes for improved convergence and stability. In *ICML*, 2023.
- [35] Salem Lahlou, Tristan Deleu, Pablo Lemos, Dinghuai Zhang, Alexandra Volokhova, Alex Hernández-García, Lena Nehale Ezzine, Yoshua Bengio, and Nikolay Malkin. A theory of continuous generative flow networks. In *ICML*, Proceedings of Machine Learning Research 202:18269–18300, 2023. arXiv:2301.12594.
- [36] Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza Rutherford, Diego de Las Casas, Lisa Anne Hendricks, Johannes Welbl, Aidan Clark, Tom Hennigan, Eric Noland, Katie Millican, and others. Training compute-optimal large language models. In *NeurIPS*, 2022. arXiv:2203.15556.
- [37] Joan Puigcerver, Carlos Riquelme, Basil Mustafa, and Neil Houlsby. From Sparse to Soft Mixtures of Experts. *ICLR*, 2024. arXiv:2308.00951.

- [38] OpenAI. Model Craft Challenge: Parameter Golf. GitHub repository <https://github.com/openai/parameter-golf>, accessed May 26, 2026.
- [39] Amelie Schreiber. Parameter Golf fork for ToricGT experimentation. GitHub repository <https://github.com/amelie-iska/parameter-golf>, accessed May 26, 2026.
- [40] Amelie Schreiber. Soft mixture-of-experts fork for ToricGT experimentation. GitHub repository <https://github.com/amelie-iska/soft-mixture-of-experts>, accessed May 26, 2026.
- [41] Insu Han, Praneeth Kacham, Amin Karbasi, Vahab Mirrokni, and Amir Zandieh. PolarQuant: Quantizing KV Caches with Polar Transformation. arXiv:2502.02617, 2025.
- [42] Wilhelm Gesenius, edited and enlarged by E. Kautzsch, translated by A. E. Cowley. *Gesenius' Hebrew Grammar*. Oxford University Press, 1910.
- [43] Bruce K. Waltke and M. O'Connor. *An Introduction to Biblical Hebrew Syntax*. Eisenbrauns, 1990.
- [44] Paul Joüon and Takamitsu Muraoka. *A Grammar of Biblical Hebrew*. Gregorian and Biblical Press, revised edition, 2006.
- [45] Kimmo Koskeniemi. Two-level morphology: A general computational model for word-form recognition and production. University of Helsinki, Department of General Linguistics, 1983.
- [46] Kenneth R. Beesley and Lauri Karttunen. *Finite State Morphology*. CSLI Publications, 2003.
- [47] Shlomo Yona and Shuly Wintner. A finite-state morphological grammar of Hebrew. *Natural Language Engineering*, 14(2):173–190, 2008.