

Git: <https://github.com/amendivelsoa/Taller-2-API-REST.git>

Set de pruebas para api

Api Dog

The screenshot shows the Postman API client interface. The left sidebar displays the 'My Workspace' with a collection named 'Taller 2' containing three requests: 'GET DogApi', 'GET pokemon', and 'GET animales'. The main panel shows the 'GET DogApi' request selected. The request URL is 'http://dog.ceo/api/breeds/BerneseMountain/random/'. The response is a 404 Not Found error, displayed in the 'Body' tab as JSON:

```
{  "status": "error",  "message": "Breed not found (master breed does not exist)",  "code": 404}
```

GET DogApi

GET

http://dog.ceo/api/breeds/BerneseMountain/random/

Send

Params Auth Headers (7) Body Scripts Tests Settings Cookies

Query Params

Key	Value	Description	...	Bulk Edit
Key	Value	Description		

Body

404 Not Found 308 ms 876 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": "error",
3   "message": "Breed not found (master breed does not exist)",
4   "code": 404
5 }
```

BREEDS LIST

<https://dog.ceo/api/breed/>

Bernese Mountain

/images/random

Fetch!



<https://dog.ceo/api/breed/>

Bernese Mountain

/images/random

Fetch!



https://dog.ceo/api/breed/

Bernese Mountain

/images/random

Fetch!



Api Pokemon


Postman interface showing a GET request to the Pokemon API endpoint: `https://pokeapi.co/api/v2/pokemon/ditto`. The response is displayed in JSON format, showing the Pokemon's details, including its name, height, weight, and various sprite URLs.

Query Params:


Key	Value	Description
Key	Value	Description

Body:

```
{
  "sprites": {
    "back_default": "https://raw.githubusercontent.com/PokeAPI/sprites/master/sprites/pokemon/back/132.png",
    "back_female": null,
    "back_shiny": "https://raw.githubusercontent.com/PokeAPI/sprites/master/sprites/pokemon/back/shiny/132.png",
    "back_shiny_female": null,
    "front_default": "https://raw.githubusercontent.com/PokeAPI/sprites/master/sprites/pokemon/132.png",
    "front_female": null,
    "front_shiny": "https://raw.githubusercontent.com/PokeAPI/sprites/master/sprites/pokemon/shiny/132.png",
    "front_shiny_female": null,
    "other": {
      "dream_world": {
        "front_default": "https://raw.githubusercontent.com/PokeAPI/sprites/master/sprites/pokemon/"
      }
    }
  }
}
```

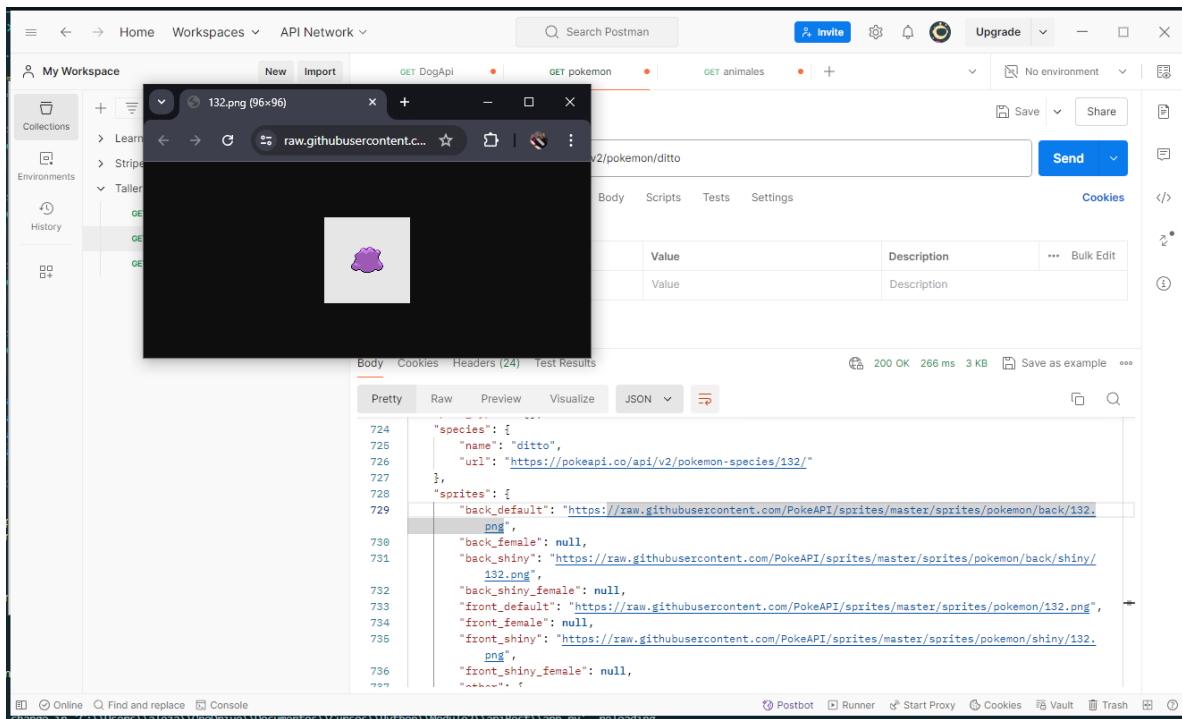

Nuestra api (Animales)

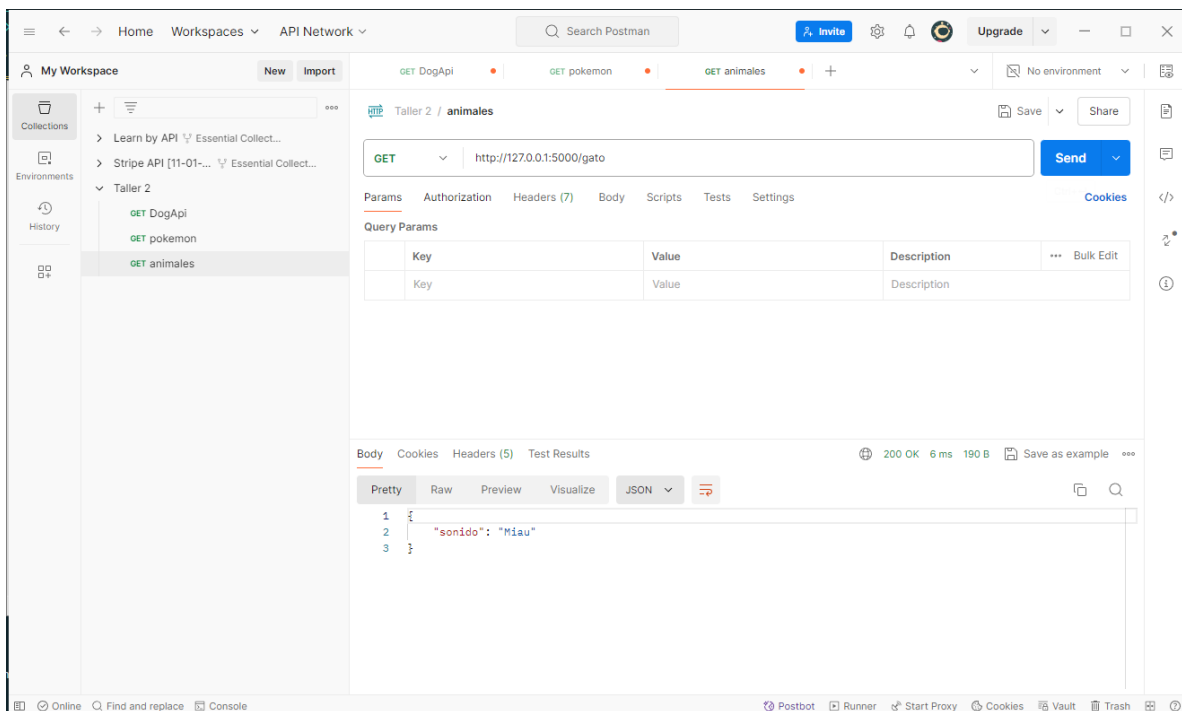

Postman interface showing a GET request to `http://127.0.0.1:5000/perro`. The response is a JSON object: `{ "sonido": "Guau" }`.

Query Params:

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body: `{ "sonido": "Guau" }`

Response: 200 OK, 5 ms, 190 B

Postman interface showing a GET request to `http://127.0.0.1:5000/huipn`. The response is a JSON object: `{ "sonido": "Fzz" }`.

Query Params:

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body: `{ "sonido": "Fzz" }`

Response: 200 OK, 12 ms, 189 B

