


Puppet Standalone Setup:

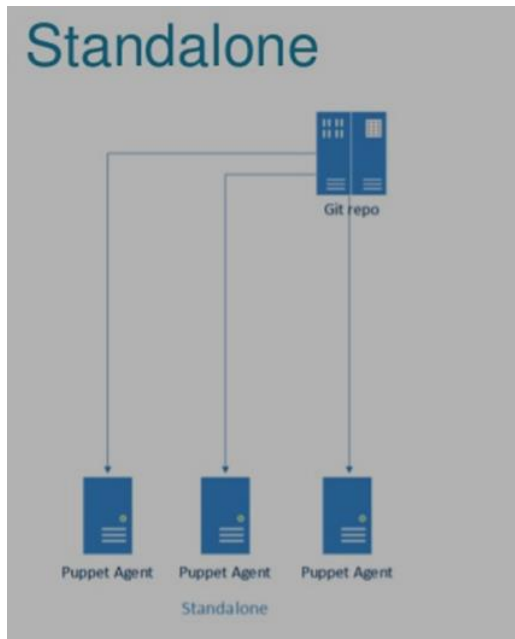

Each machine/node has puppet software installed and running. Each node also has its copy of puppet configuration (puppet manifests), which you can run using `puppet apply` on the node.

Add the repo:

```
$ sudo rpm -ivh http://yum.puppetlabs.com/puppetlabs-release-el-7.noarch.rpm
```

INSTALLING PUPPET:

```
yum -y install puppet
```

Verify Puppet Installation and version by using the below commands

```
which puppet
```

```
puppet-version
```