
StampAlbumGen2 — System Overview (Before Refactor)

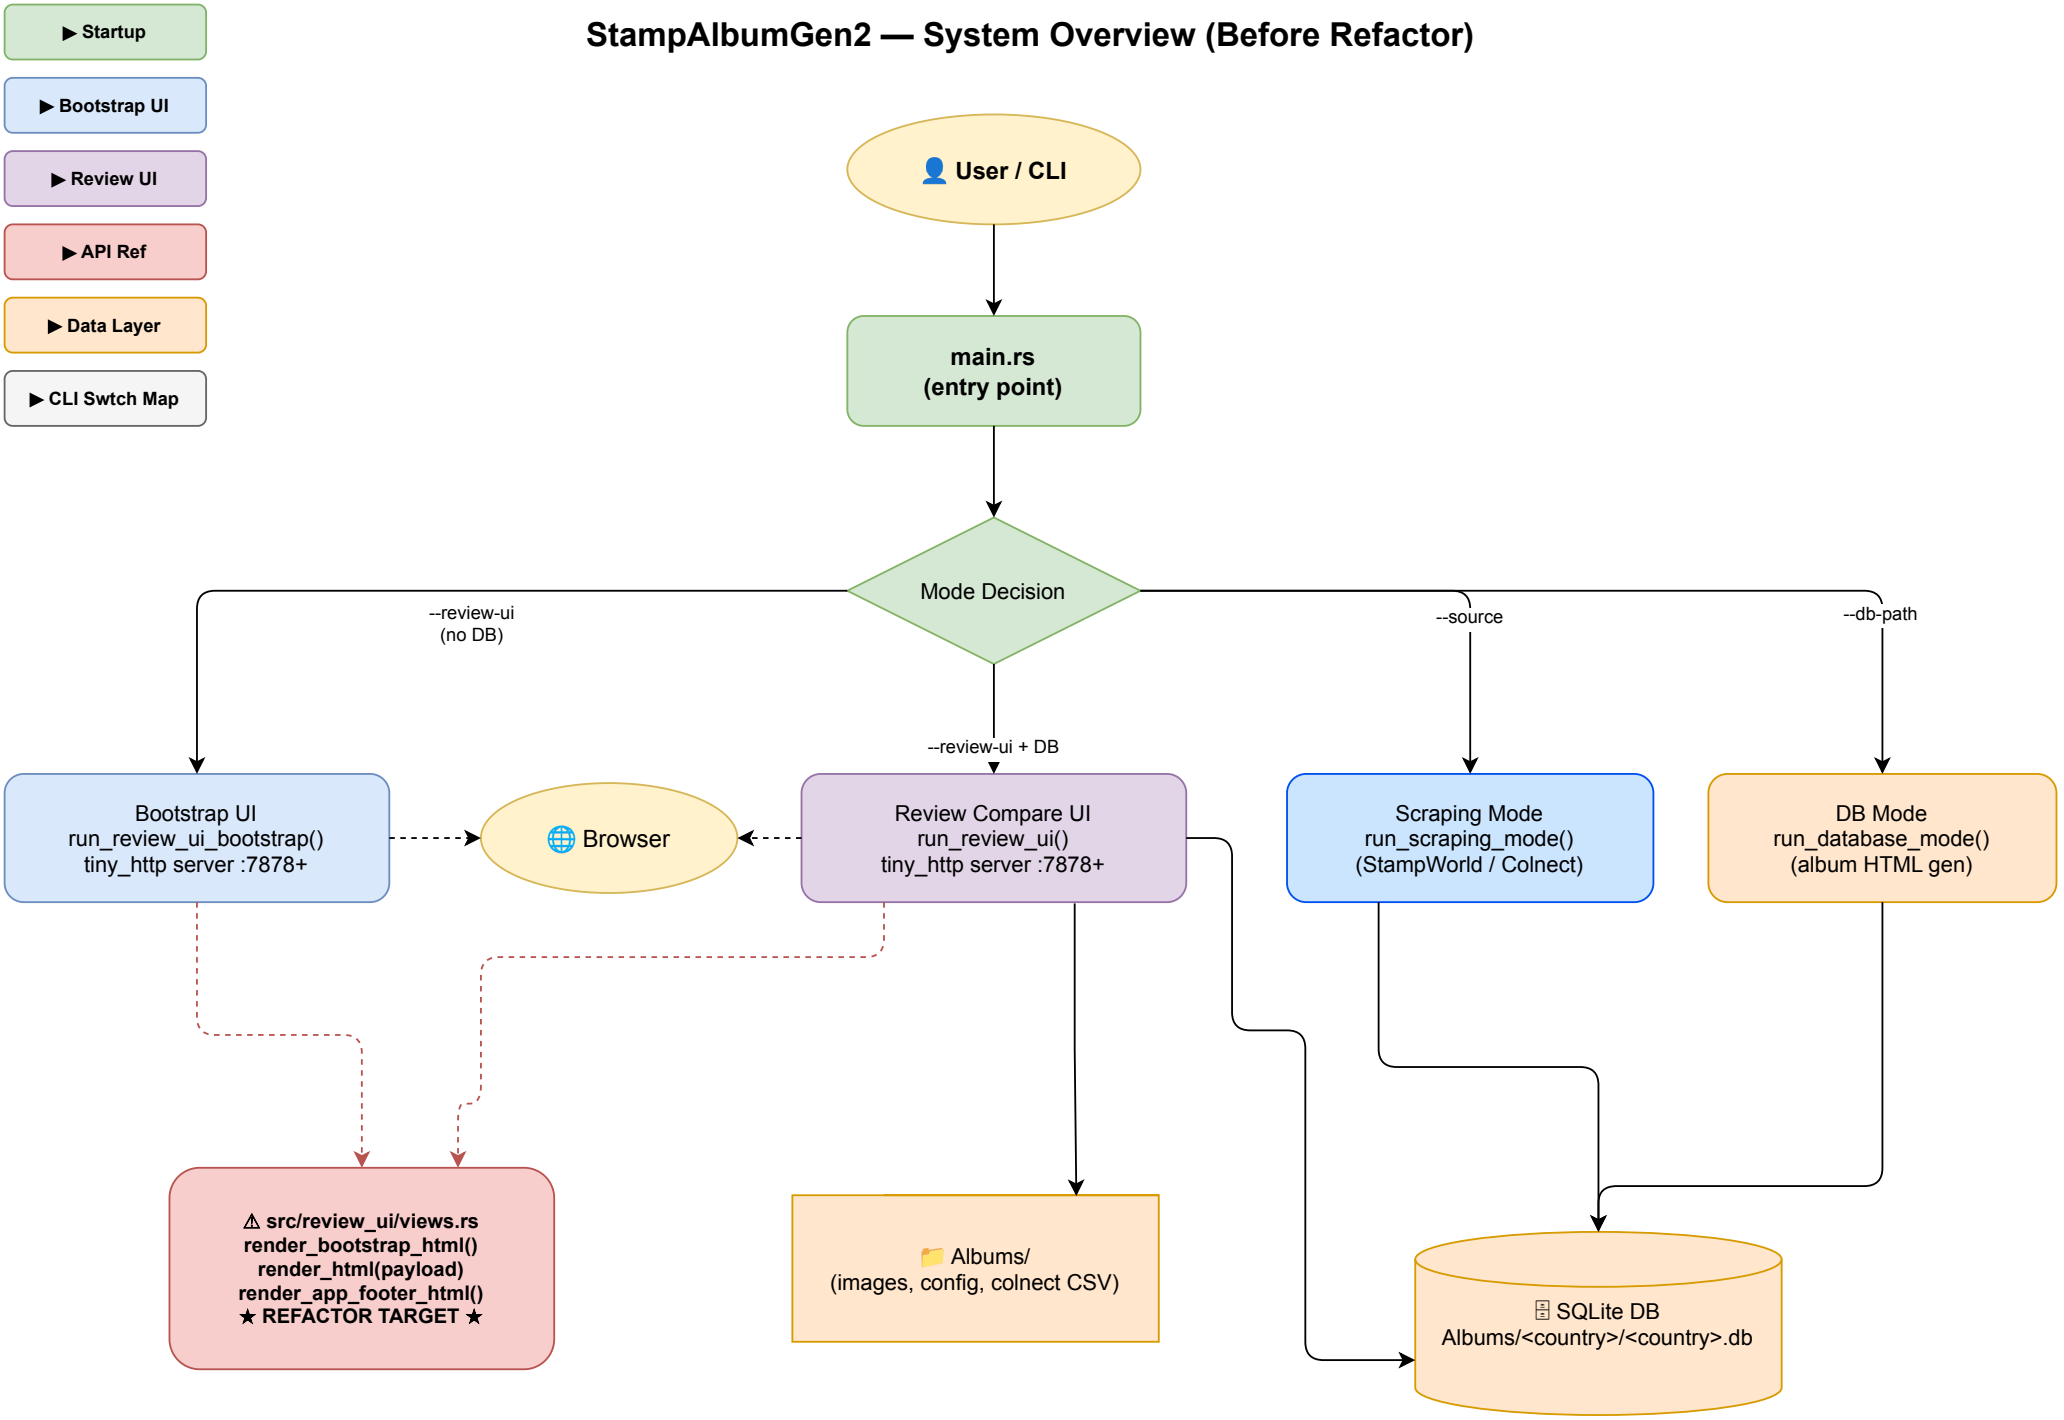


◀ Overview

▶ Bootstrap UI

▶ Review UI


▶ CLI Swtich Map

App Startup — main.rs

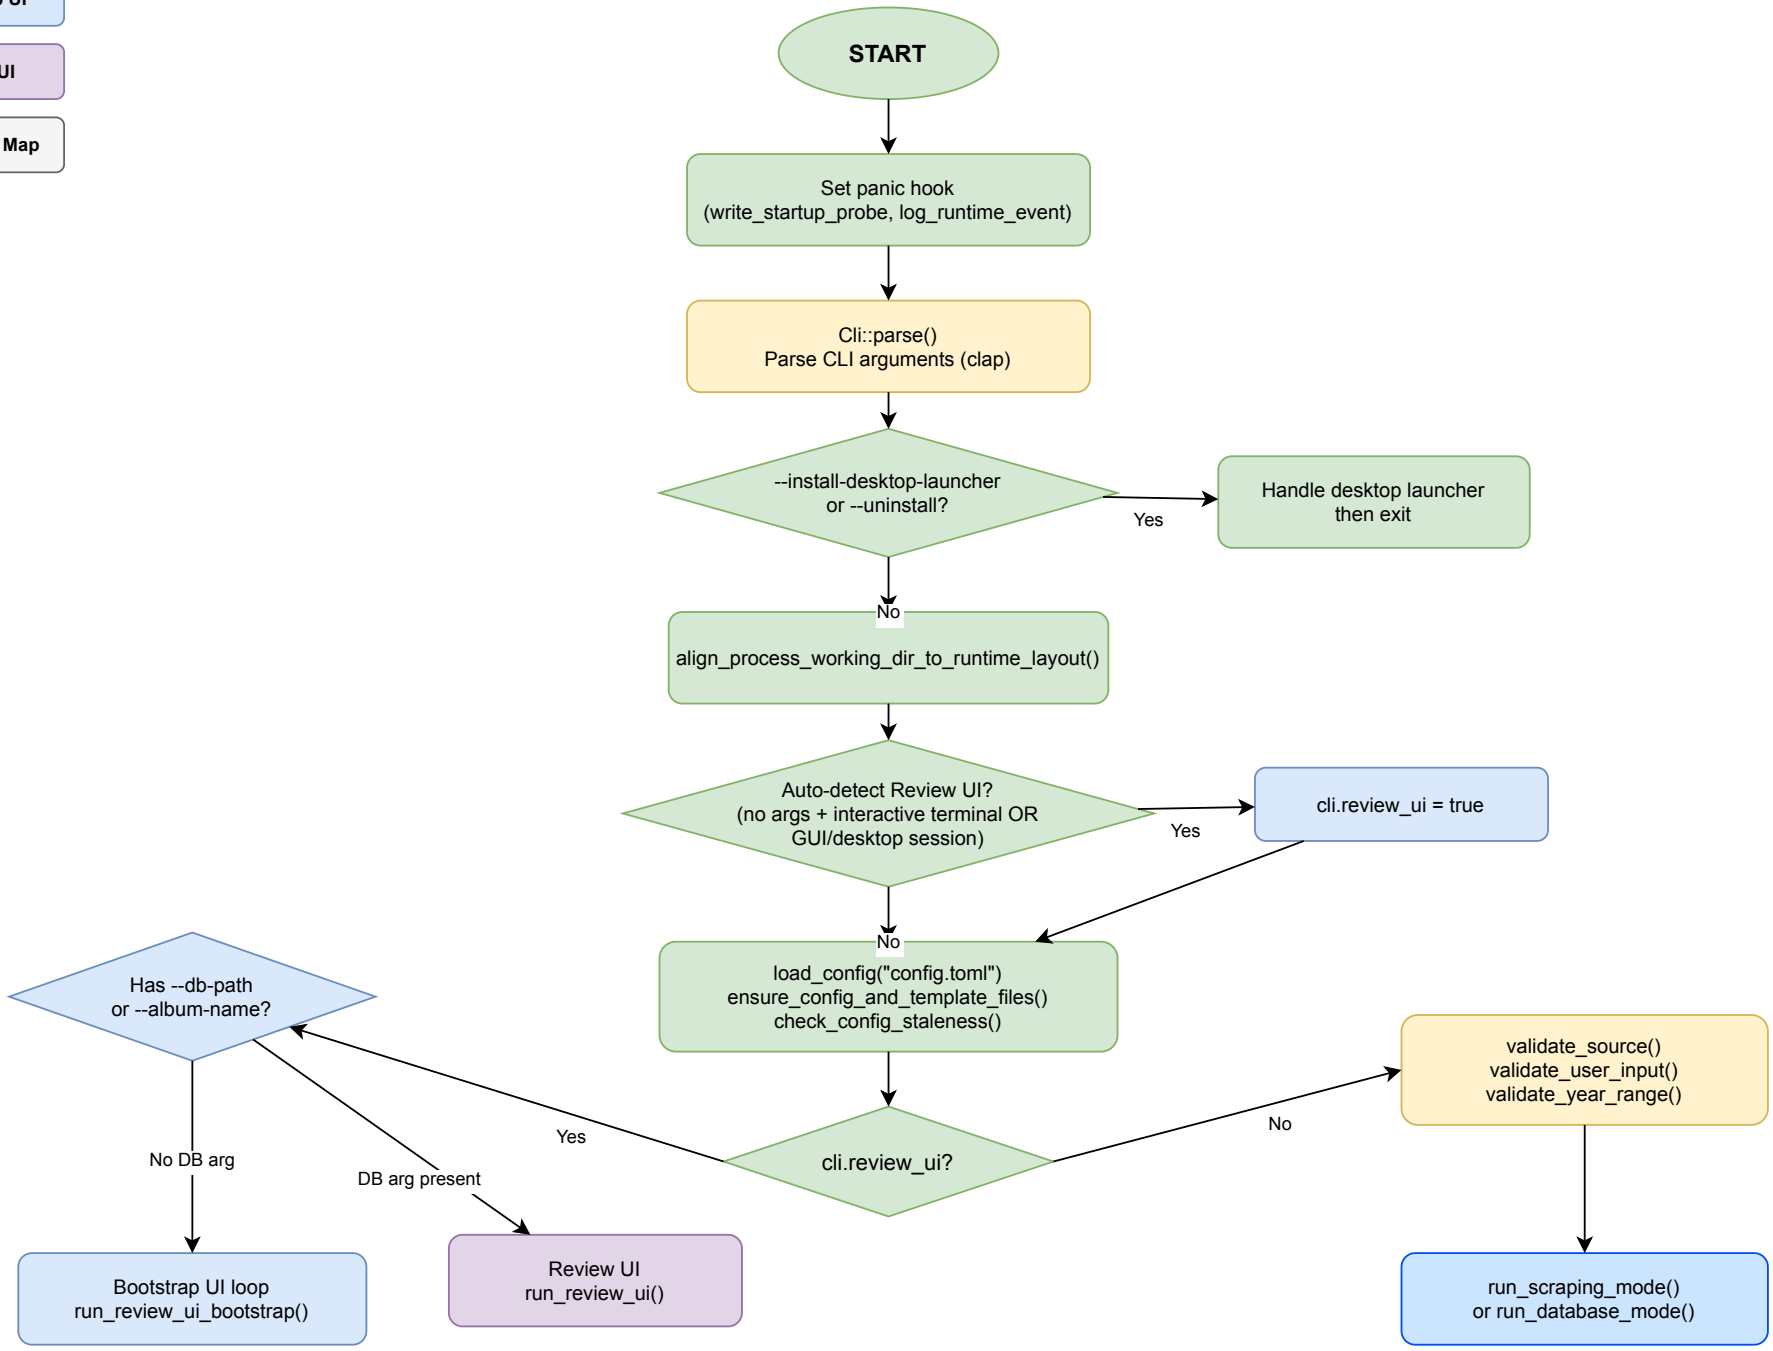


◀ Overview
◀ Startup
▶ Review UI
▶ API Ref
▶ CLI Swtich Map

Bootstrap UI — run_review_ui_bootstrap()

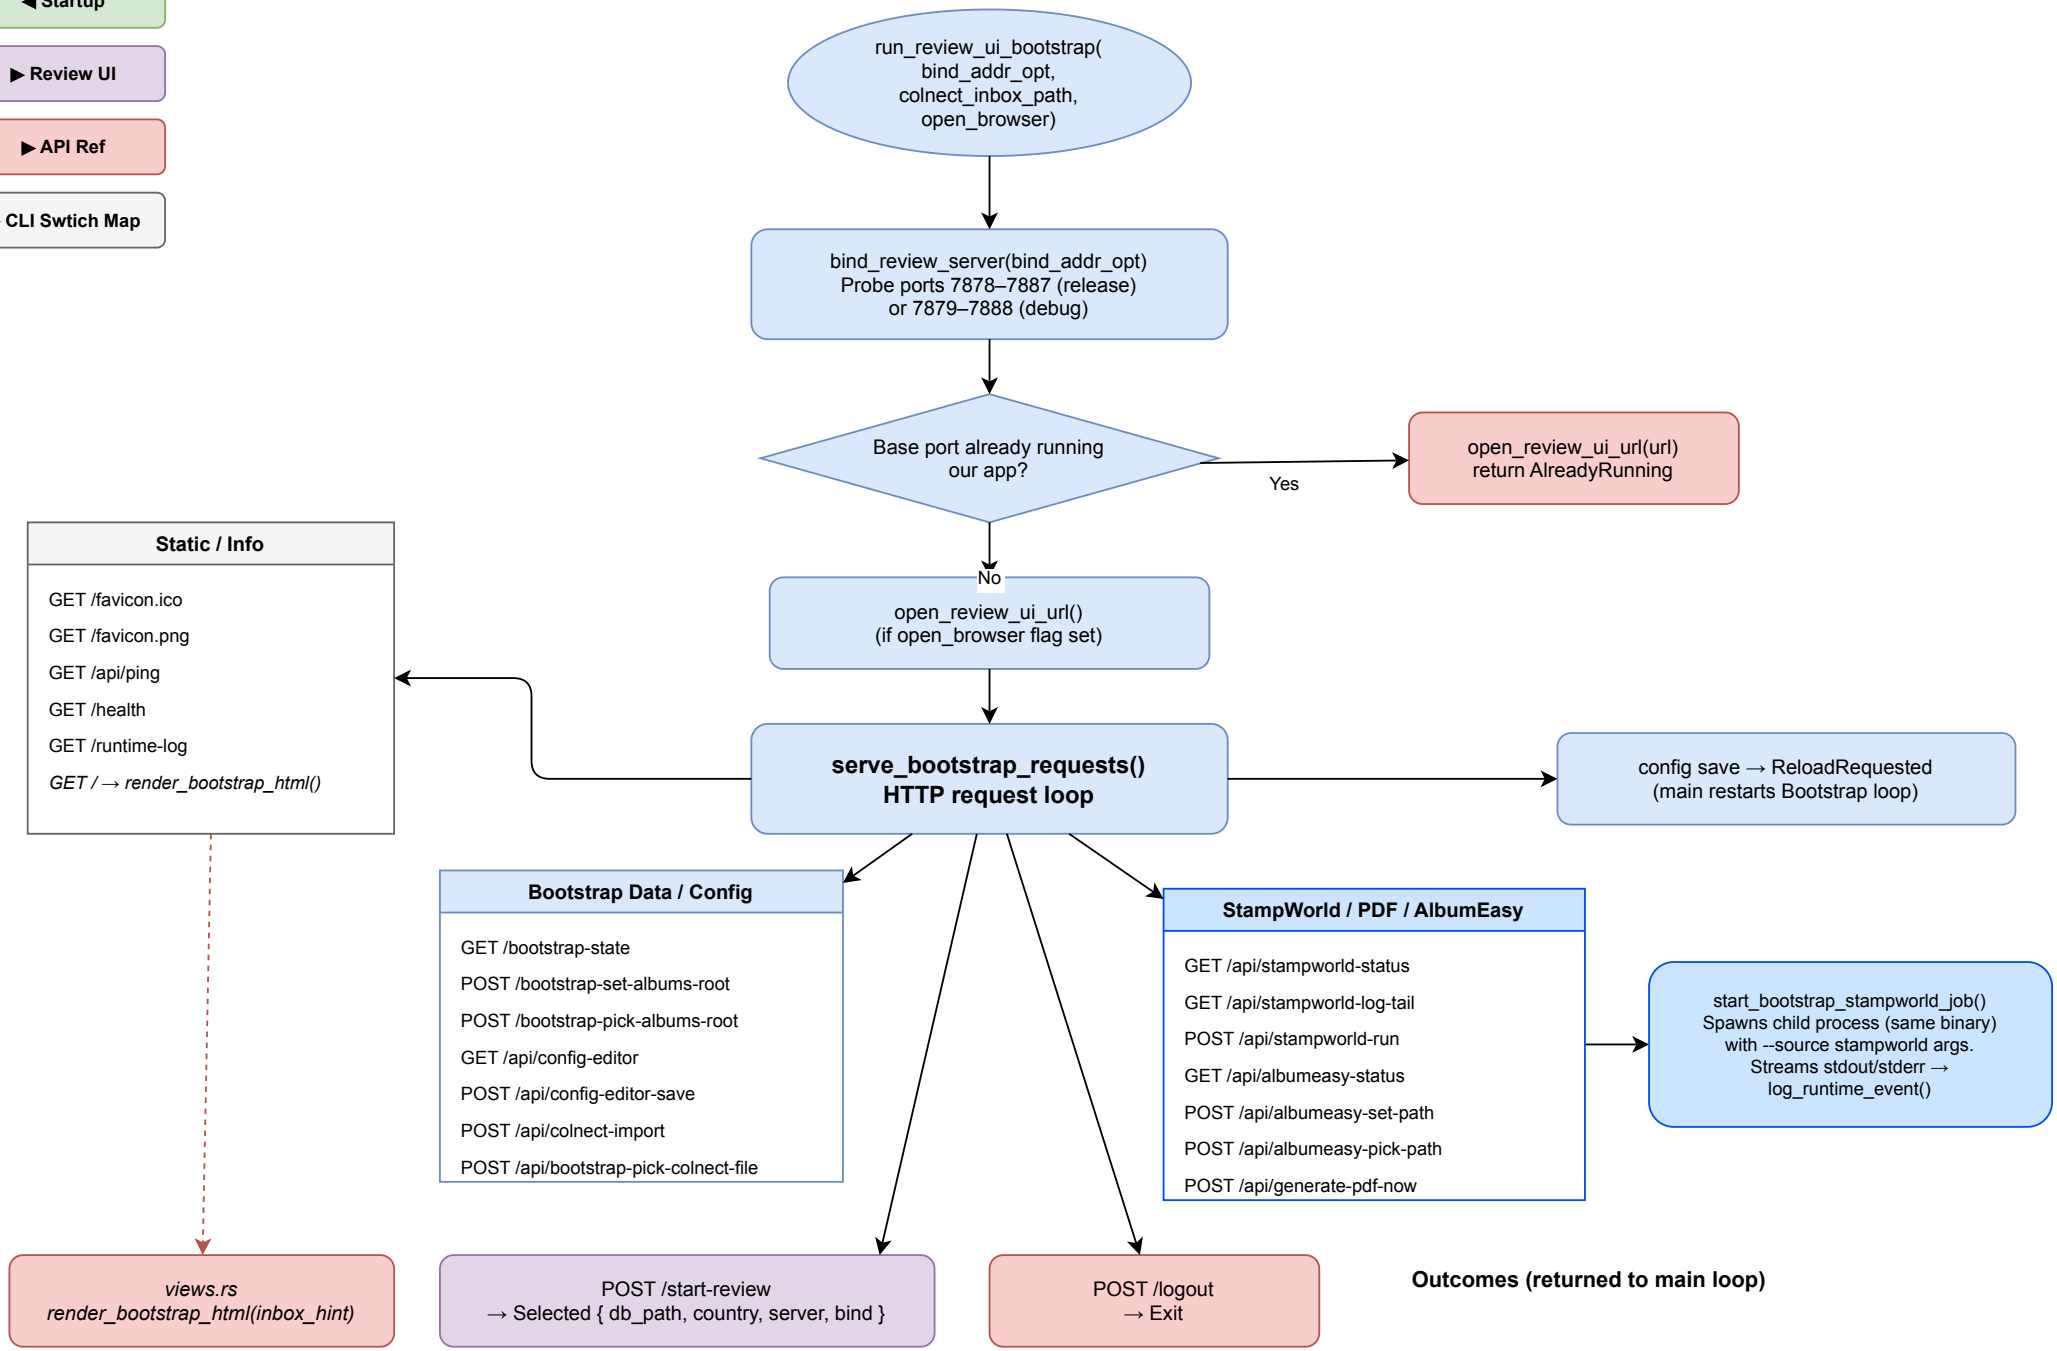

◀ Overview
◀ Bootstrap UI
▶ API Ref
▶ Data Layer
▶ CLI Map

Review Compare UI — run_review_ui()

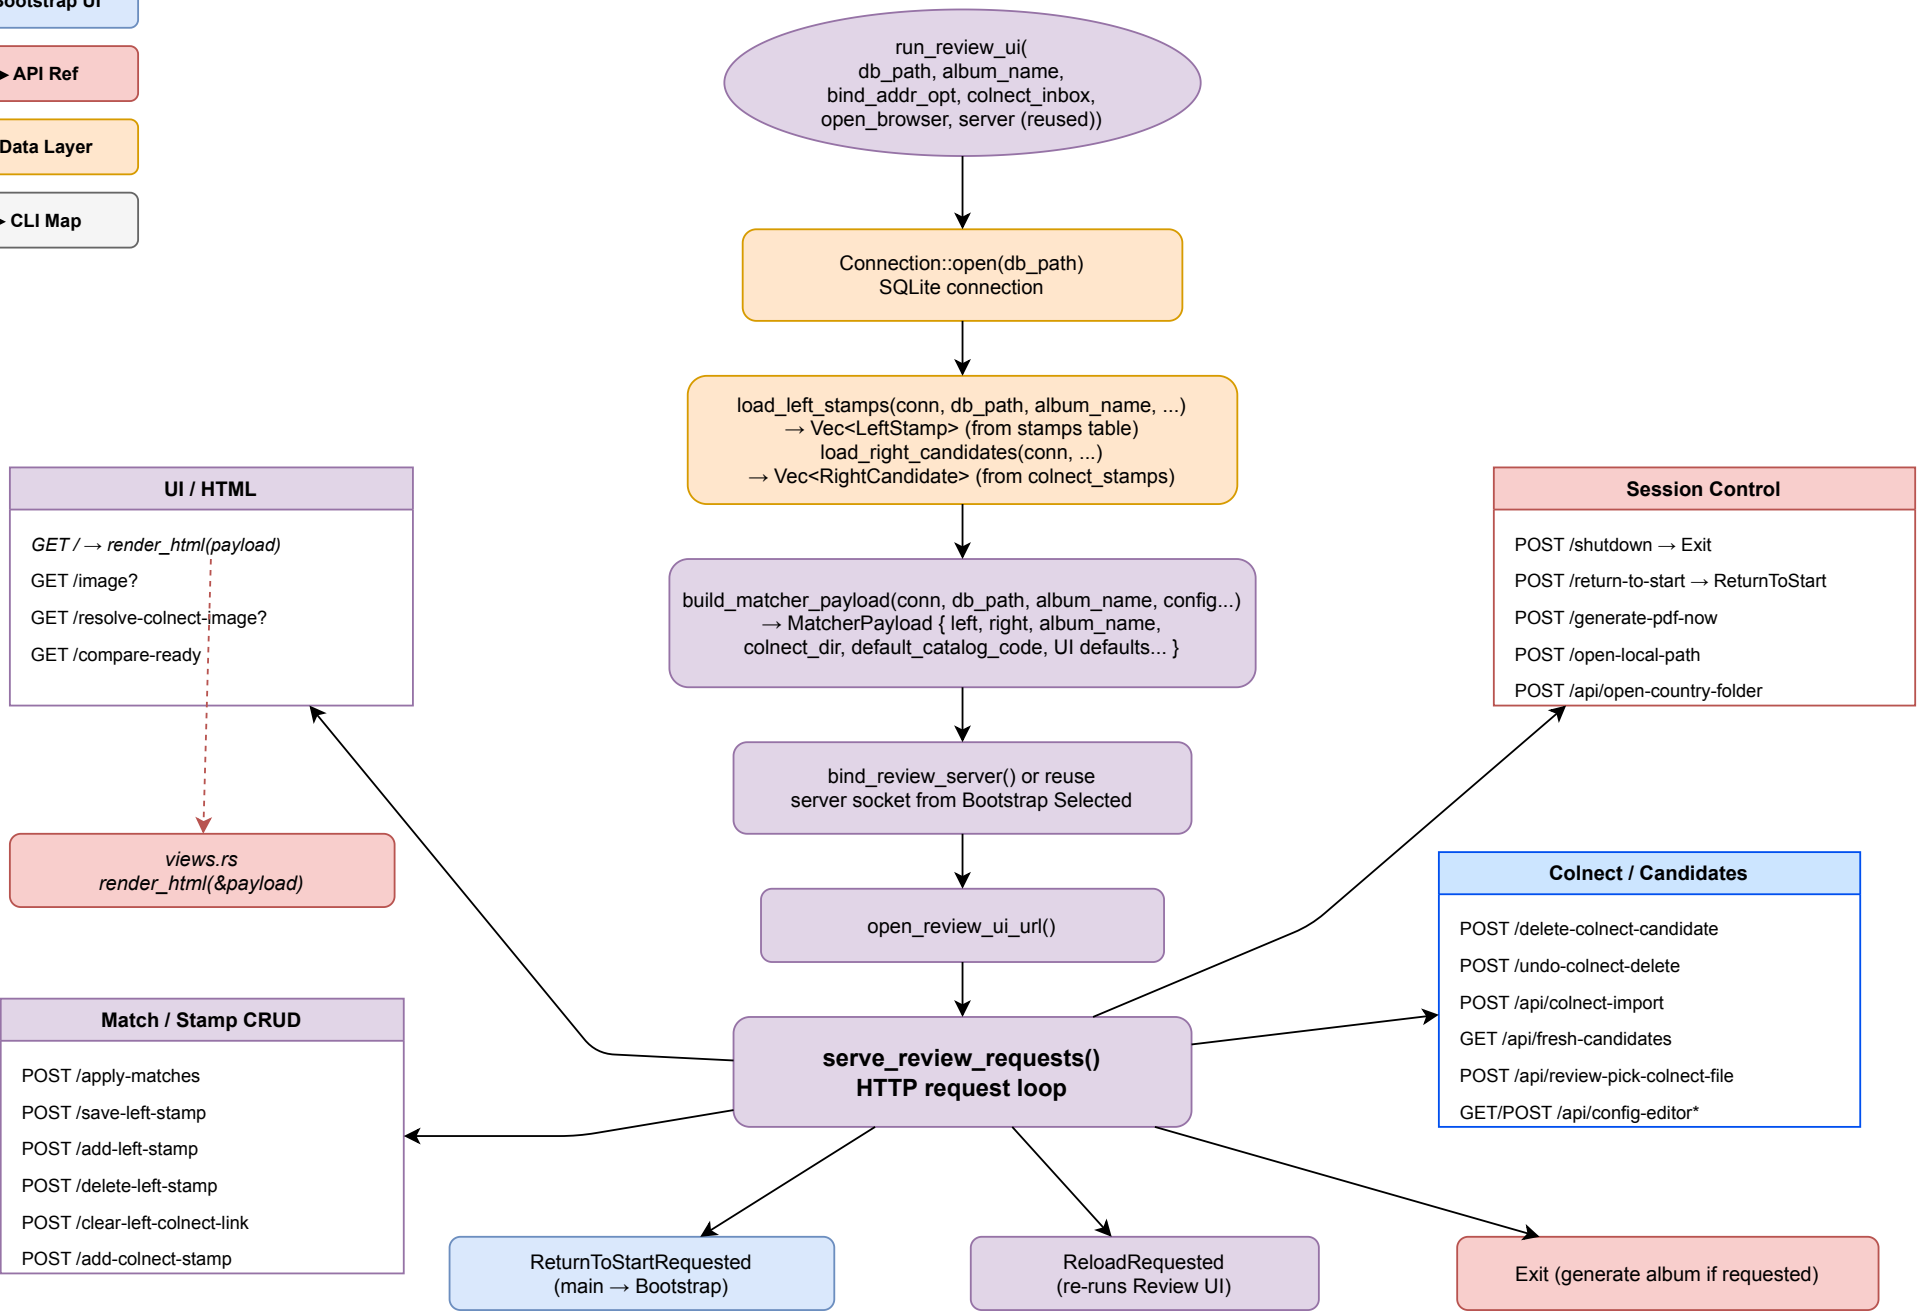

◀ Overview
◀ Bootstrap UI
◀ Review UI
▶ Data Layer
▶ CLI Swtich Map

HTTP API Reference — Both Servers

Bootstrap Server (serve_bootstrap_requests)

Shared / Health

GET /favicon.ico
GET /favicon.png
GET /api/ping → JSON identity probe
GET /health
GET /runtime-log → log lines

Bootstrap UI / Country Selection

GET / → render_bootstrap_html() ★
GET /bootstrap-state
POST /bootstrap-set-albums-root
POST /bootstrap-pick-albums-root
POST /start-review → Selected outcome
POST /logout → Exit outcome
POST /api/review-client-log

Config Editor

GET /api/config-editor
POST /api/config-editor-save → ReloadRequested

StampWorld / PDF / AlbumEasy / Colnect

GET /api/stampworld-status
GET /api/stampworld-log-tail
POST /api/stampworld-run → spawns child process
GET /api/albumeasy-status
POST /api/albumeasy-set-path
POST /api/albumeasy-pick-path → file dialog
POST /api/generate-pdf-now → generate album/PDF
POST /api/colnect-import → CSV ingest
POST /api/bootstrap-pick-colnect-file → file dialog

Review Compare Server (serve_review_requests)

Shared / Health (same as Bootstrap)

GET /favicon.ico /favicon.png /api/ping /health /runtime-log
GET /api/stampworld-status /api/stampworld-log-tail
POST /api/stampworld-run POST /api/review-client-log
GET /api/config-editor POST /api/config-editor-save-album
POST /api/config-editor-delete-album-override POST /api/config-editor-save

UI / HTML

GET / or /?... → render_html(&payload) ★
GET /image? → serve local image file
GET /resolve-colnect-image? → proxy/cache colnect image
GET /compare-ready → readiness check

Match / Stamp CRUD

POST /apply-matches POST /save-left-stamp POST /add-left-stamp
POST /delete-left-stamp POST /clear-left-colnect-link
POST /add-colnect-stamp POST /delete-colnect-candidate
POST /undo-colnect-delete POST /api/colnect-import
GET /api/fresh-candidates
POST /api/review-pick-colnect-file POST /api/default-catalog-config

Session Control / PDF / Files

POST /shutdown → generate album opt. + Exit | ReturnToStart
POST /return-to-start → ReturnToStartRequested outcome
POST /generate-pdf-now → generate album + optional PDF
POST /open-local-path POST /api/open-country-folder

★ = calls views.rs render function (REFACTOR TARGET)

◀ Overview
◀ Bootstrap UI
◀ Review UI
◀ API Ref
▶ CLI Swtich Map

Data Layer & Non-UI Modes

SQLite Schema (Albums//.db)

TABLE: stamps

rowid INTEGER (PK)
sg_number TEXT
catalog_code TEXT
year INTEGER
series TEXT
image_path TEXT
description TEXT
watermark, design, engraving, ...
colnect_id, colnect_page_url, colnect_image_url,
colnect_name, colnect_catalog_codes, ...
colnect_score, colnect_accuracy, colnect_list,
colnect_quantity, colnect_condition, ...
(47 fields total on LeftStamp struct)


TABLE: colnect_stamps

rowid INTEGER (PK)
colnect_id TEXT UNIQUE
sg_number, year, series, page_url
image_url, image_path, description
watermark, design, engraving, perforation
name, catalog_codes_text, country
width, height, format, emission, printing
paper, gum, face_value, currency, colors
ord_mi, ord_sn, ord_yt, ord_sg, expiry_date
print_run, parent_item, variant, overprint_variant
score, accuracy, list, quantity, condition
is_deleted INTEGER DEFAULT 0
(43 fields total on RightCandidate struct)


TABLE: colnect_catalog_codes

rowid INTEGER (PK)
colnect_id TEXT (FK → colnect_stamps)
catalog_type TEXT
code TEXT


Scraping Pipeline (run_scraping_mode)

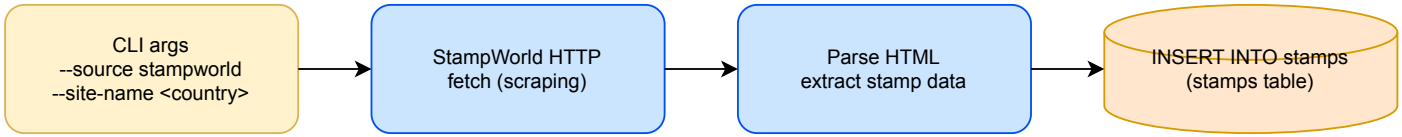



Colnect CSV Import (run_colnect_inbox_mode / colnect_import_data)

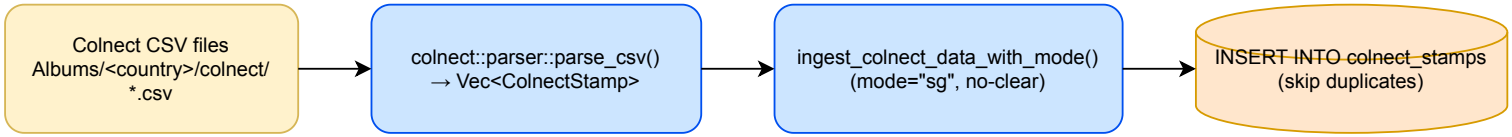

Album Generation (run_database_mode)

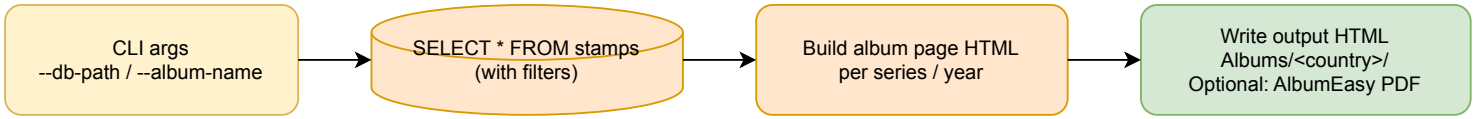

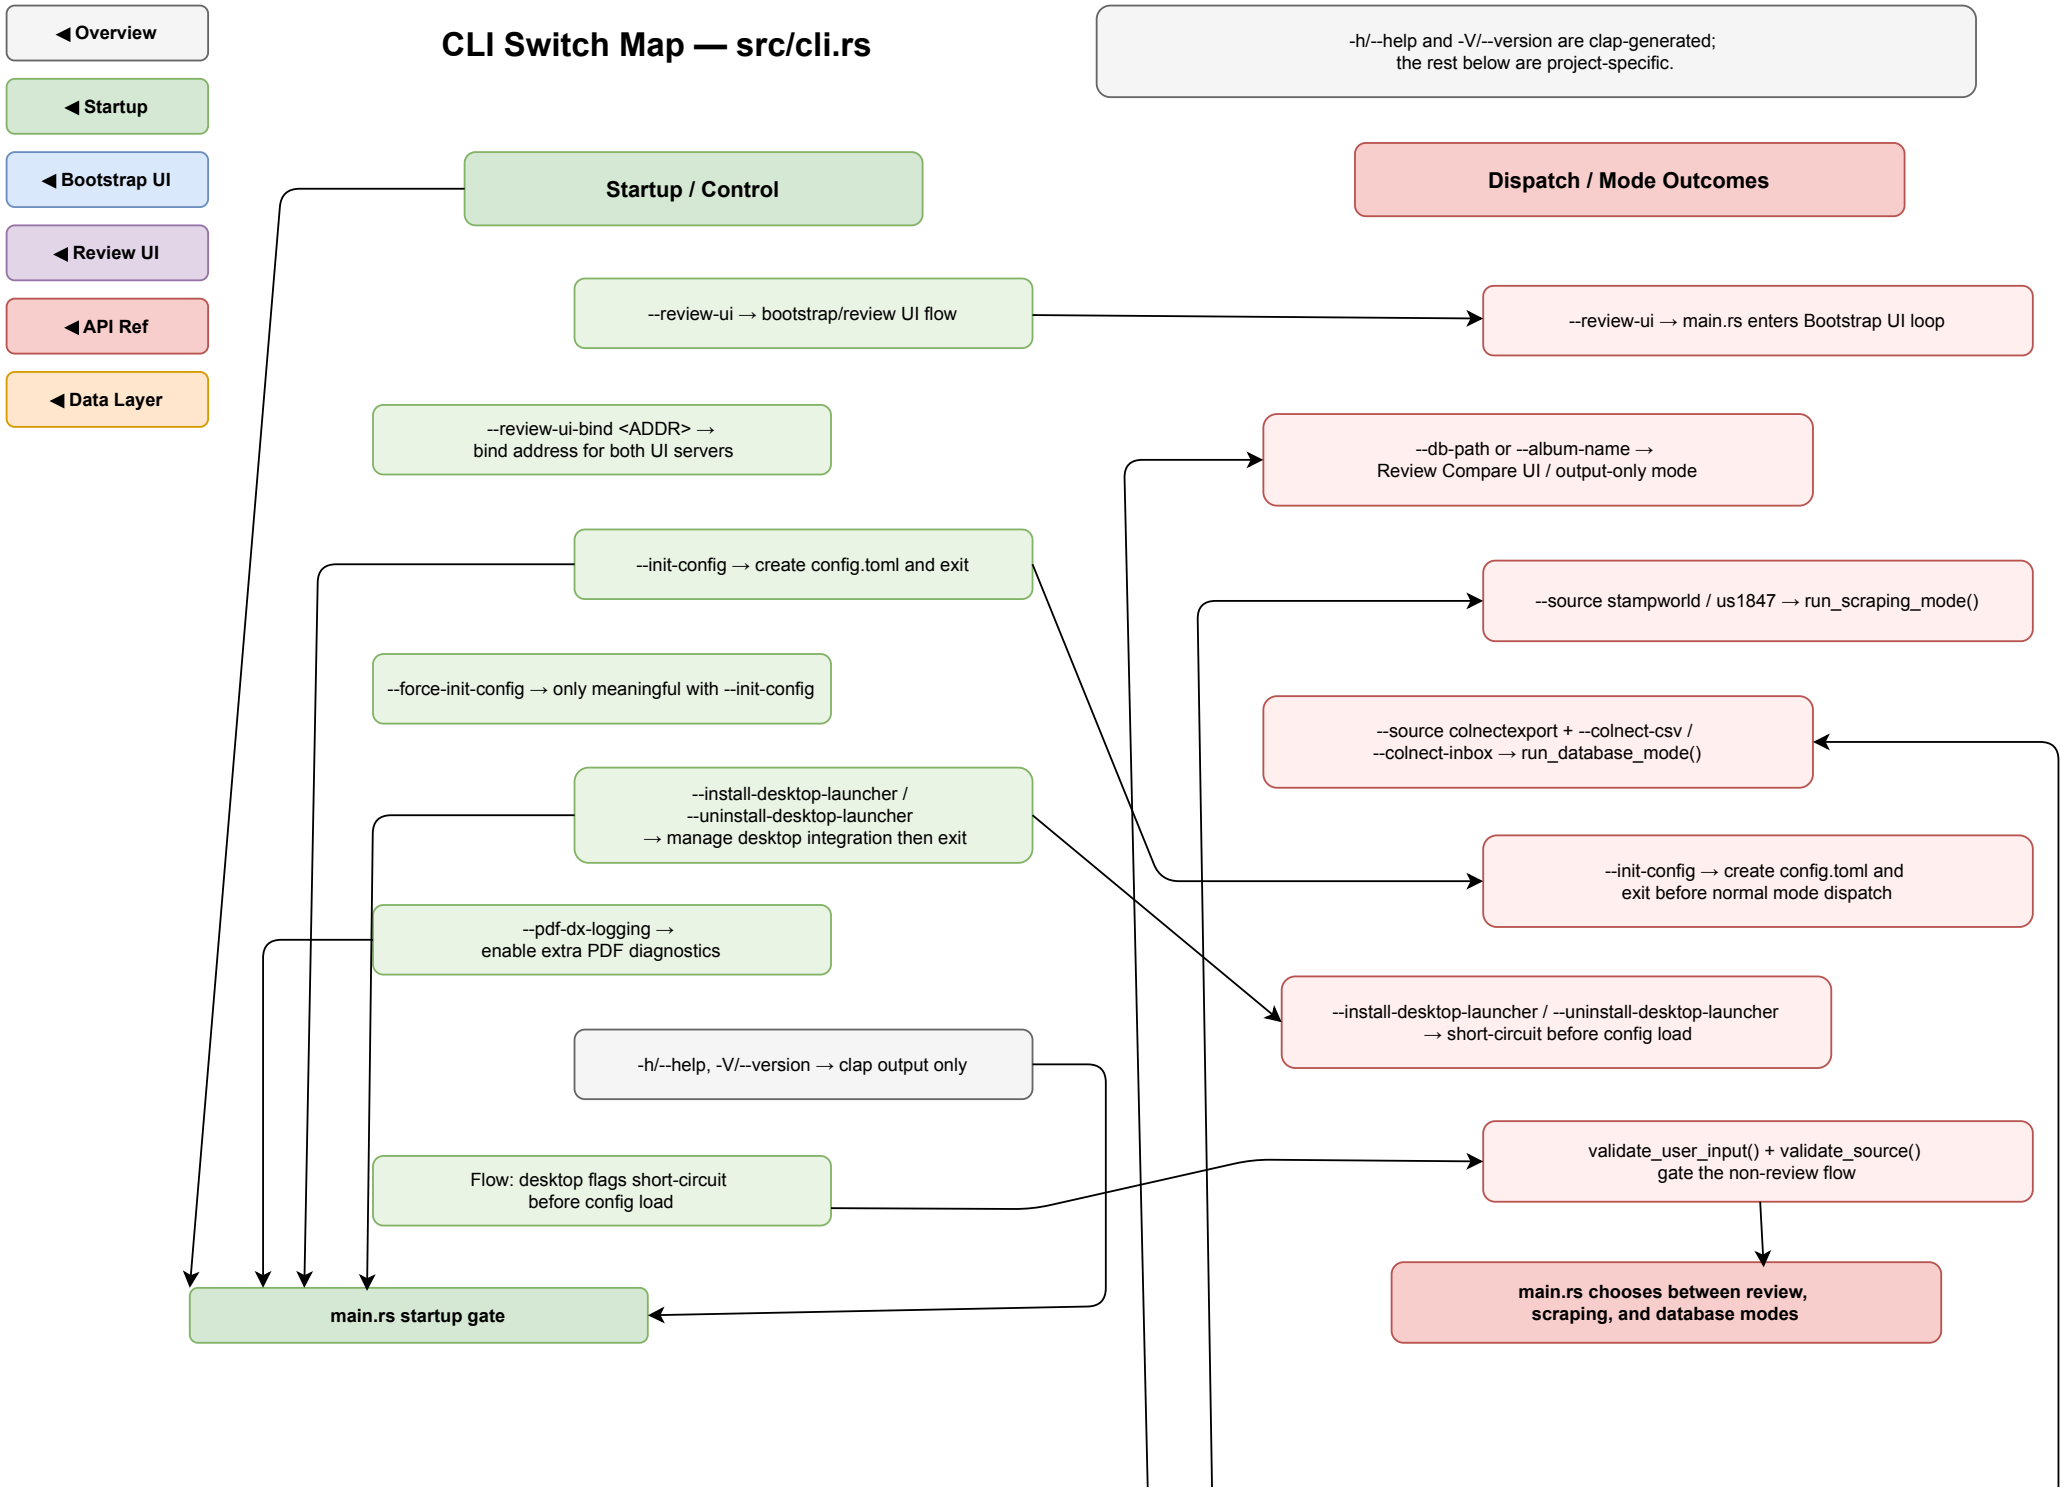
◀ Overview
◀ Startup
◀ Bootstrap UI
◀ Review UI
◀ API Ref
◀ Data Layer
CLI Switch Map — src/cli.rs
-h/--help and -V/--version are clap-generated;
the rest below are project-specific.
Startup / Control
Dispatch / Mode Outcomes
--review-ui → bootstrap/review UI flow
--review-ui → main.rs enters Bootstrap UI loop
--review-ui-bind <ADDR> →
bind address for both UI servers
--db-path or --album-name →
Review Compare UI / output-only mode
--init-config → create config.toml and exit
--source stampworld / us1847 → run_scraping_mode()
--force-init-config → only meaningful with --init-config
--source colnectexport + --colnect-csv /
--colnect-inbox → run_database_mode()
--install-desktop-launcher /
--uninstall-desktop-launcher
→ manage desktop integration then exit
--init-config → create config.toml and
exit before normal mode dispatch
--pdf-dx-logging →
enable extra PDF diagnostics
--install-desktop-launcher / --uninstall-desktop-launcher
→ short-circuit before config load
-h/--help, -V/--version → clap output only
validate_user_input() + validate_source()
gate the non-review flow
Flow: desktop flags short-circuit
before config load
main.rs startup gate
main.rs chooses between review,
scraping, and database modes

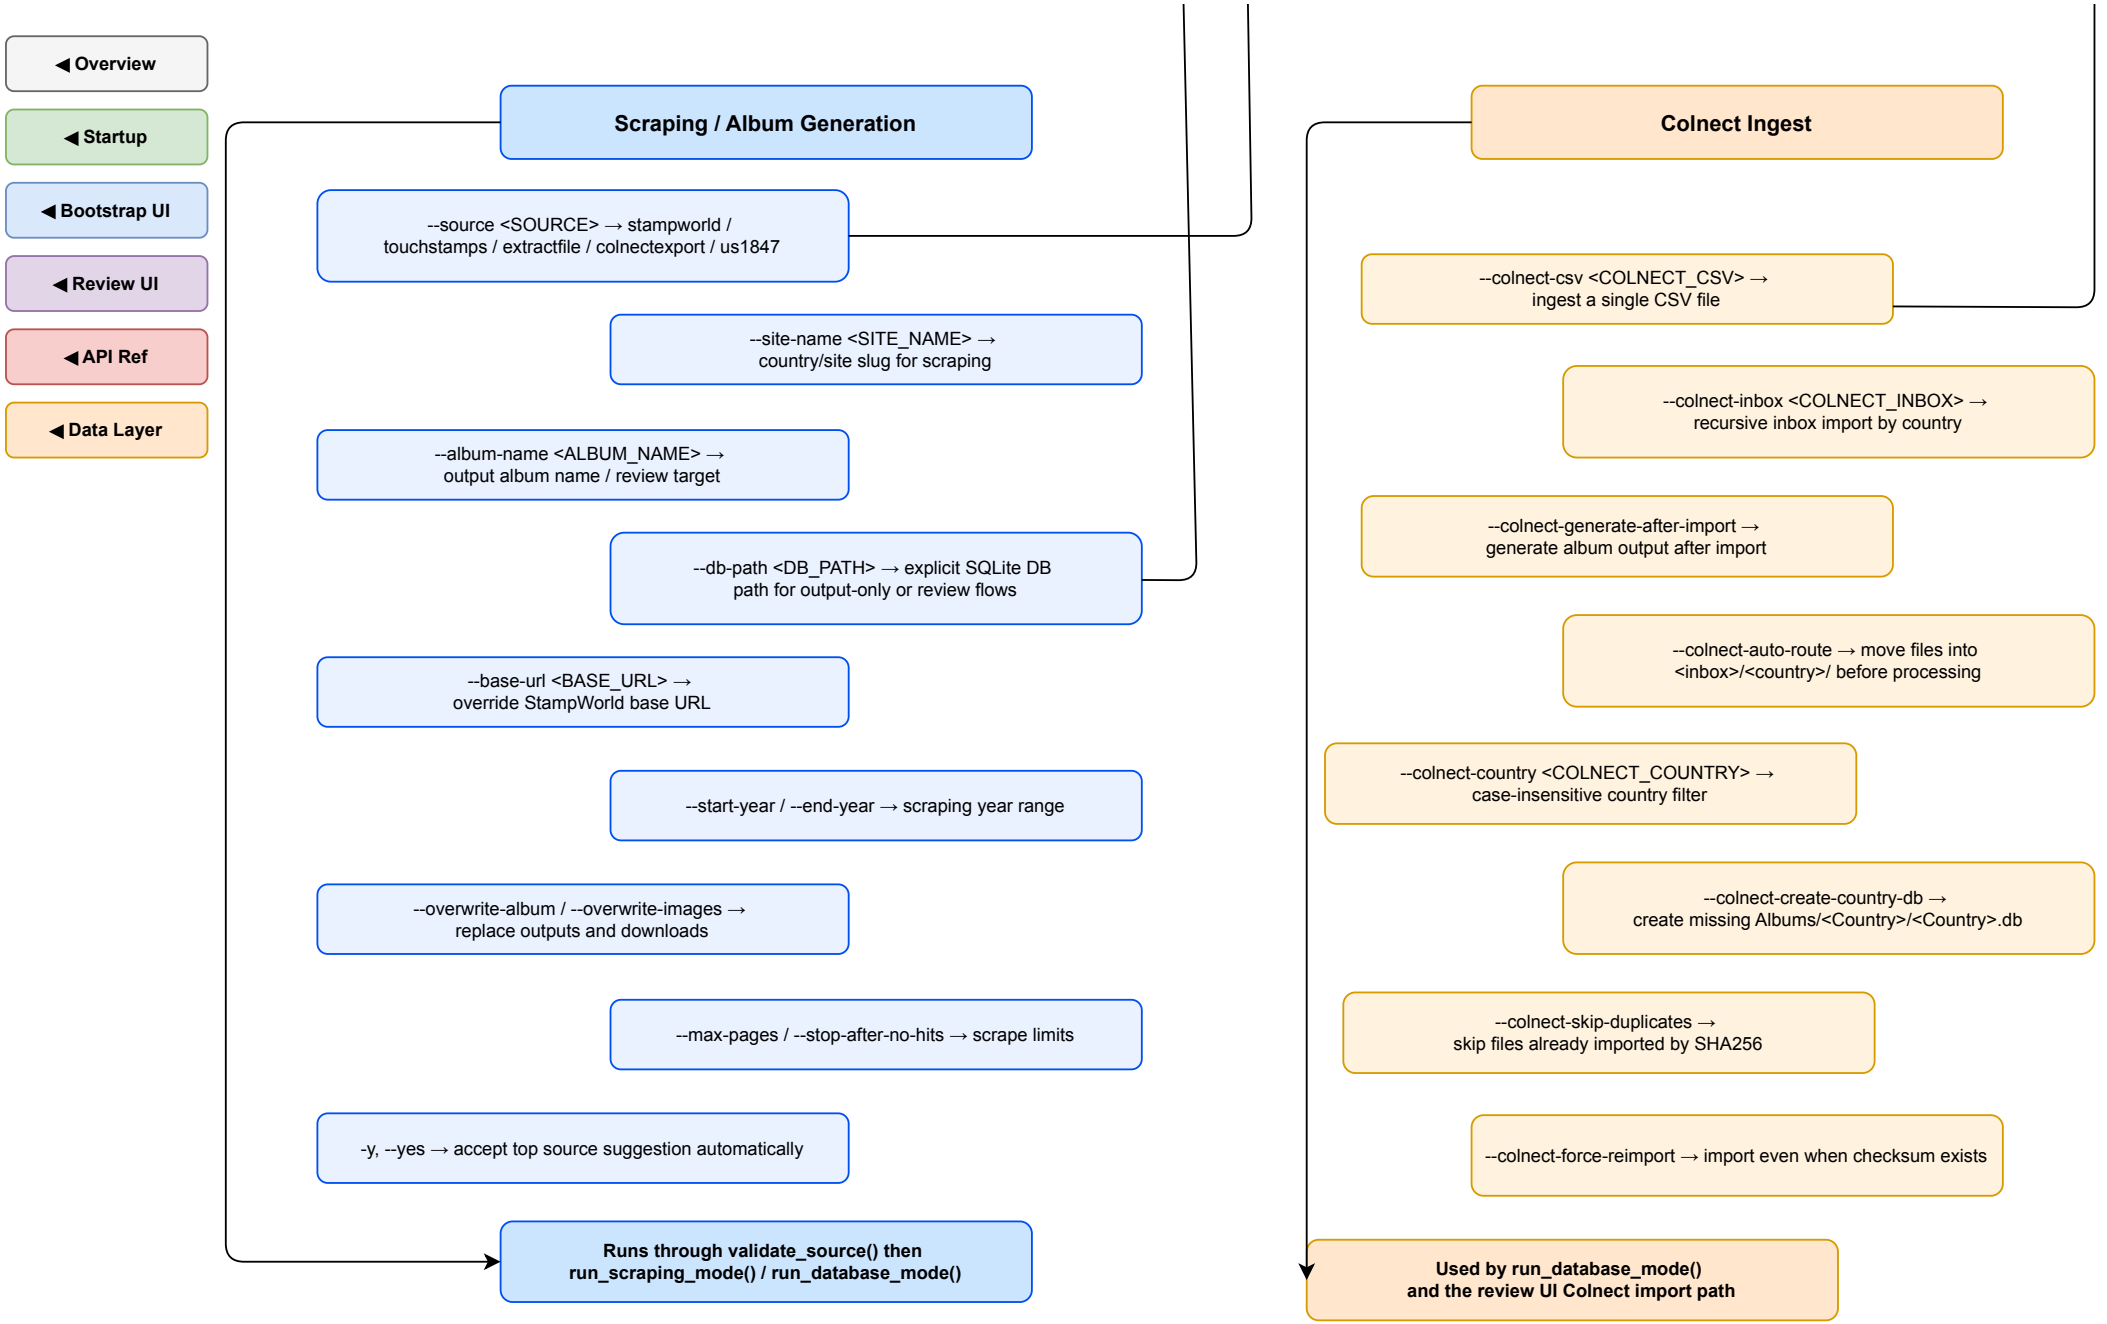
◀ Overview
◀ Startup
◀ Bootstrap UI
◀ Review UI
◀ API Ref
◀ Data Layer
Scraping / Album Generation
--source <SOURCE> → stampworld / touchstamps / extractfile / colnectexport / us1847
--site-name <SITE_NAME> → country/site slug for scraping
--album-name <ALBUM_NAME> → output album name / review target
--db-path <DB_PATH> → explicit SQLite DB path for output-only or review flows
--base-url <BASE_URL> → override StampWorld base URL
--start-year / --end-year → scraping year range
--overwrite-album / --overwrite-images → replace outputs and downloads
--max-pages / --stop-after-no-hits → scrape limits
-y, --yes → accept top source suggestion automatically
Runs through validate_source() then run_scraping_mode() / run_database_mode()
Colnect Ingest
--colnect-csv <COLNECT_CSV> → ingest a single CSV file
--colnect-inbox <COLNECT_INBOX> → recursive inbox import by country
--colnect-generate-after-import → generate album output after import
--colnect-auto-route → move files into <inbox>/<country>/ before processing
--colnect-country <COLNECT_COUNTRY> → case-insensitive country filter
--colnect-create-country-db → create missing Albums/<Country>/<Country>.db
--colnect-skip-duplicates → skip files already imported by SHA256
--colnect-force-reimport → import even when checksum exists
Used by run_database_mode() and the review UI Colnect import path