


Bertens Validation

Amin Adibi

23/03/2021

Validation

Missing Values

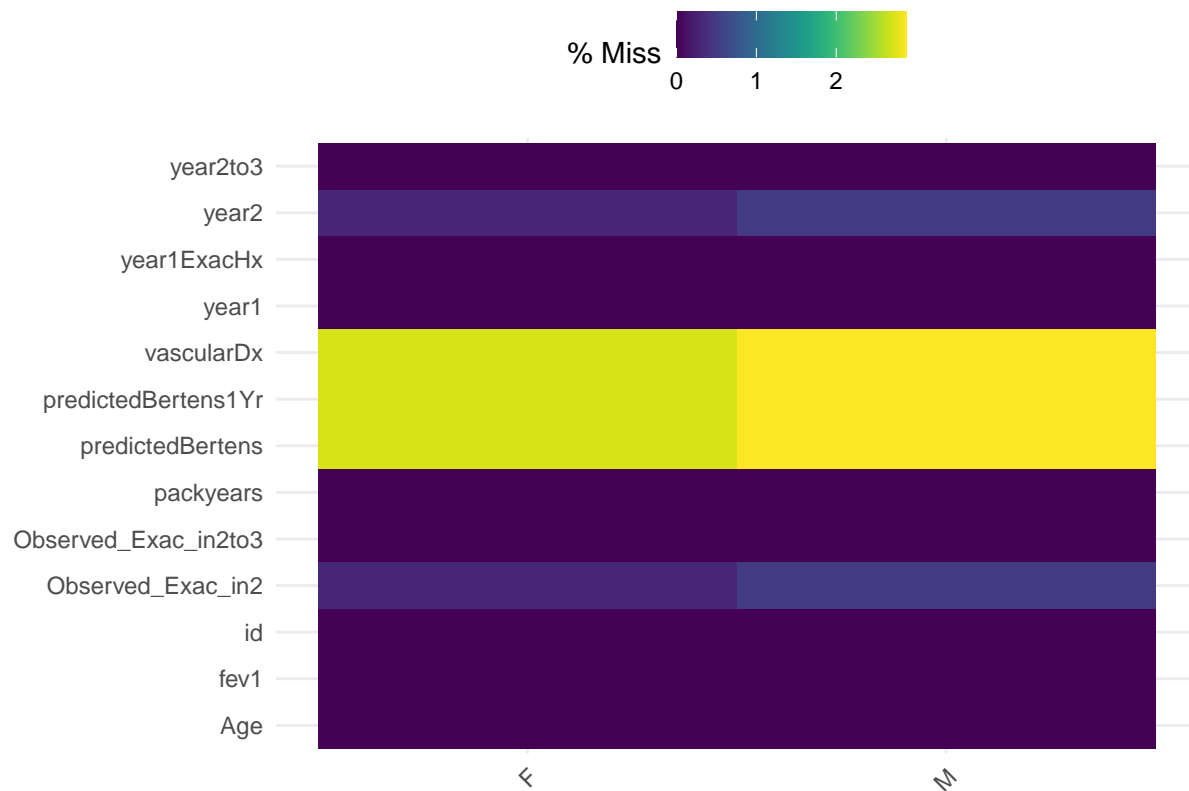


```
## # A tibble: 6 x 14
##   id      Age sex   fev1 packyears vascularDx year1 year2 year2to3
##   <chr> <dbl> <chr> <dbl>    <dbl> <lgl>    <dbl> <dbl>    <dbl>
## 1 100033  60 M    33.6     27 FALSE      0     1      2
## 2 100051  70 M    54.1     68 FALSE      1     1      3
## 3 100120  72 F    43.2     20 FALSE      0     3      4
## 4 100219  67 F    28.4     40 FALSE      1     1      1
## 5 100235  62 M    44.4     50 FALSE      1     0      0
## 6 100411  75 M    45.9     22 FALSE      1     0      3
## # ... with 5 more variables: Observed_Exac_in2to3 <dbl>,
## #   Observed_Exac_in2 <dbl>, year1ExacHx <dbl>, predictedBertens <dbl>,
## #   predictedBertens1Yr <dbl>
```

Two years, Bertens vs History - all COPD

```
## Setting levels: control = 0, case = 1
```

```
## Setting direction: controls < cases
```

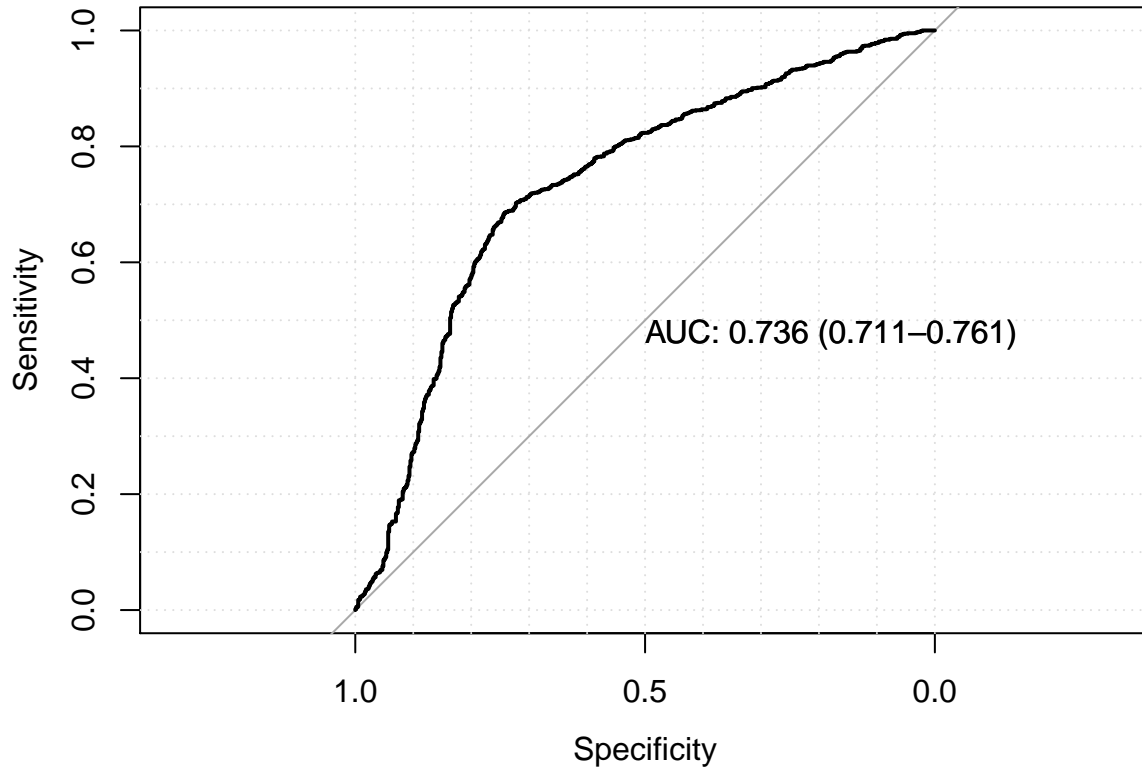

```
##
```

```
## Call:
```

```
## roc.default(response = eclipseComplete$Observed_Exac_in2to3,    predictor = eclipseComplete$predicted
```

```
##
```


```
## Data: eclipseComplete$predictedBertens in 599 controls (eclipseComplete$Observed_Exac_in2to3 0) < 12
```

```
## Area under the curve: 0.7357
```


```
## 95% CI: 0.7107-0.7607 (DeLong)
```

```
## Setting levels: control = 0, case = 1
```


```
## Setting direction: controls < cases
```

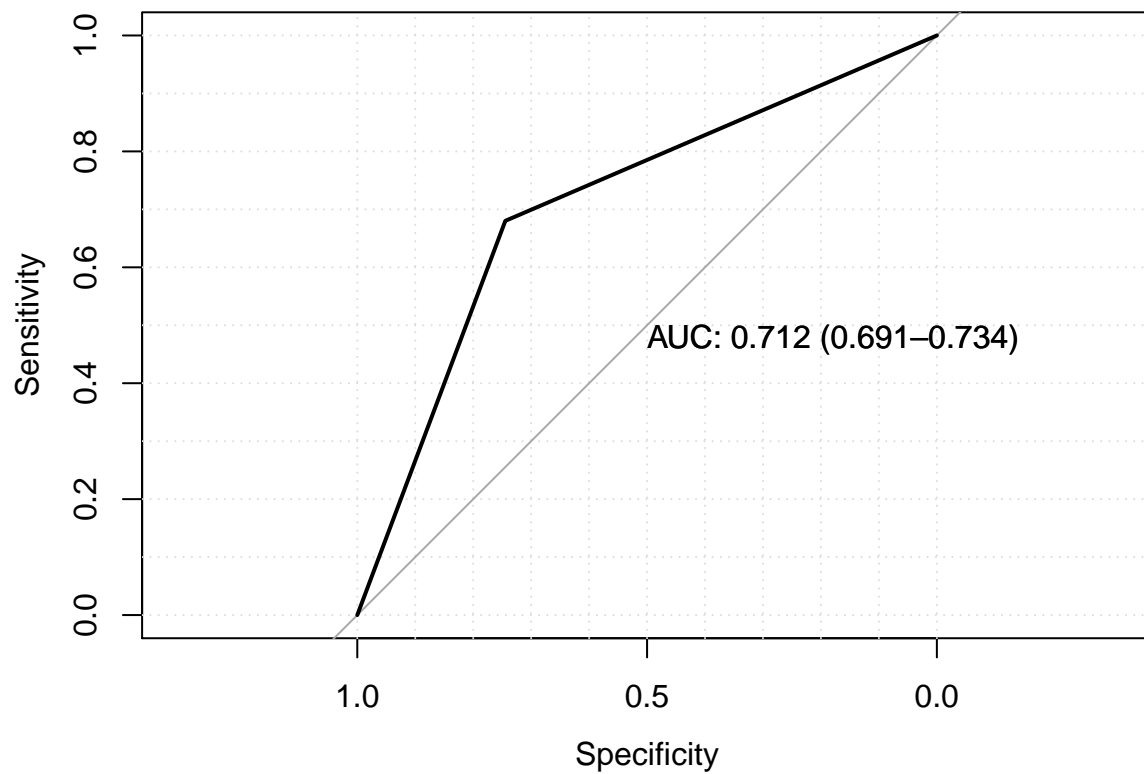

```
##
## Call:
## roc.default(response = eclipseComplete$Observed_Exac_in2to3,      predictor = eclipseComplete$year1ExacHx,
##
## Data: eclipseComplete$year1ExacHx in 599 controls (eclipseComplete$Observed_Exac_in2to3 0) < 1257 cases
## Area under the curve: 0.7124
## 95% CI: 0.6907-0.7341 (DeLong)
```

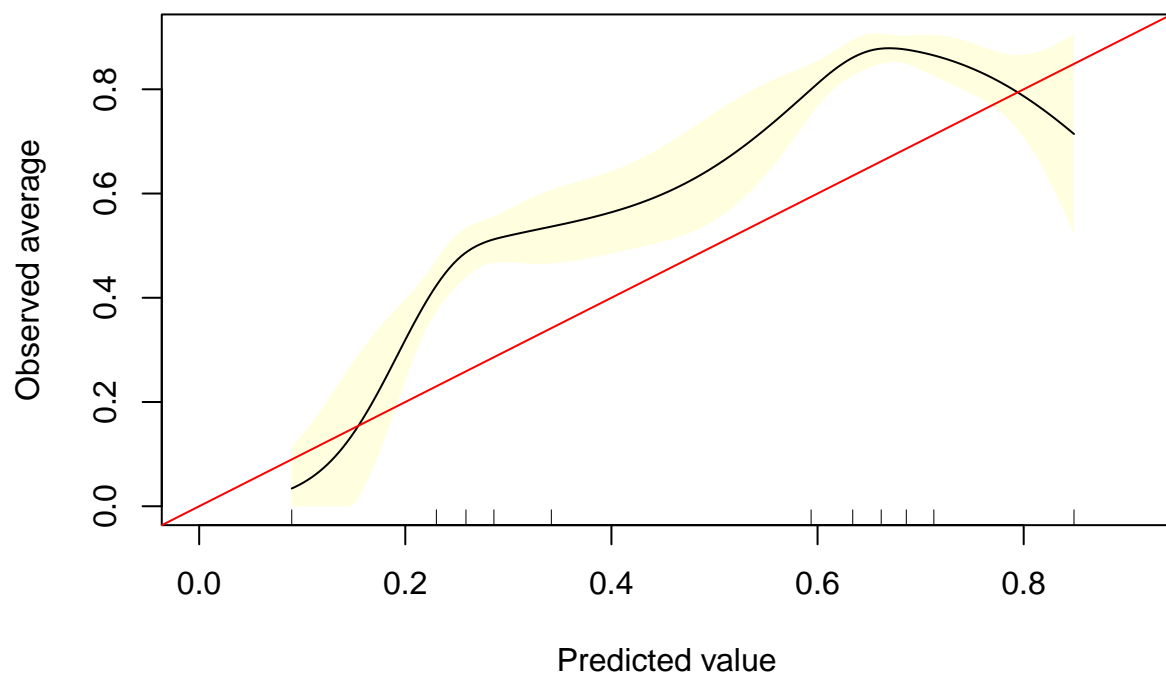


Note: When multiple decision curves are plotted, decision curves for 'All' are calculated using the p

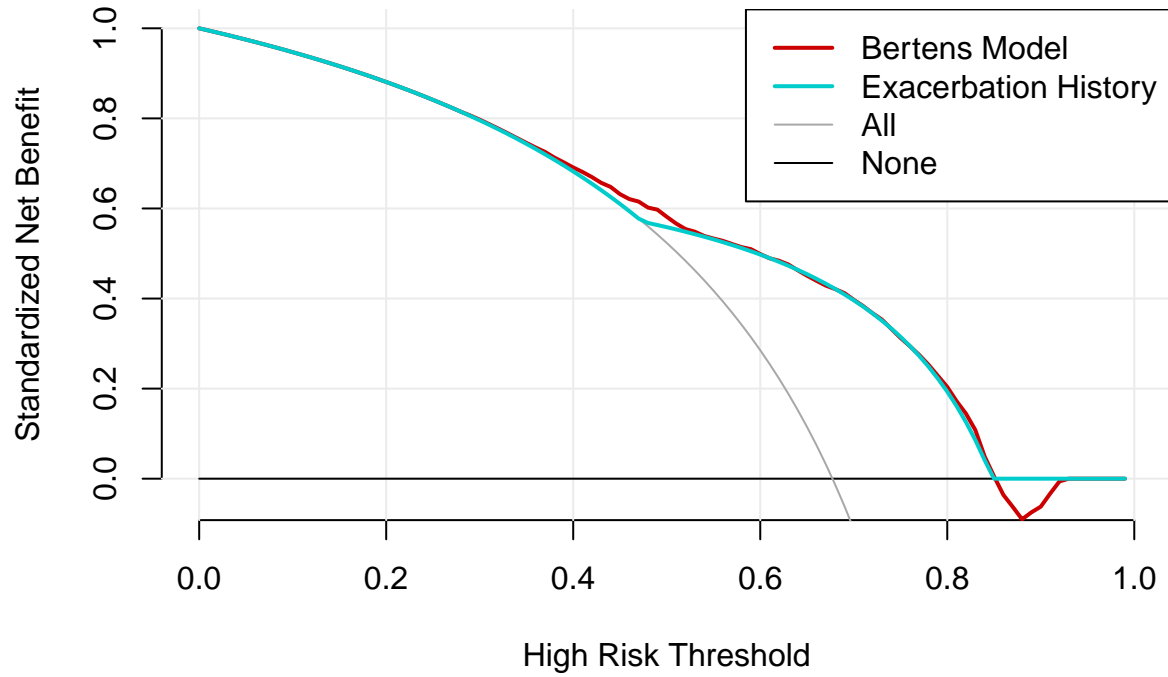



Two years - Smokers


Setting levels: control = 0, case = 1

Setting direction: controls < cases

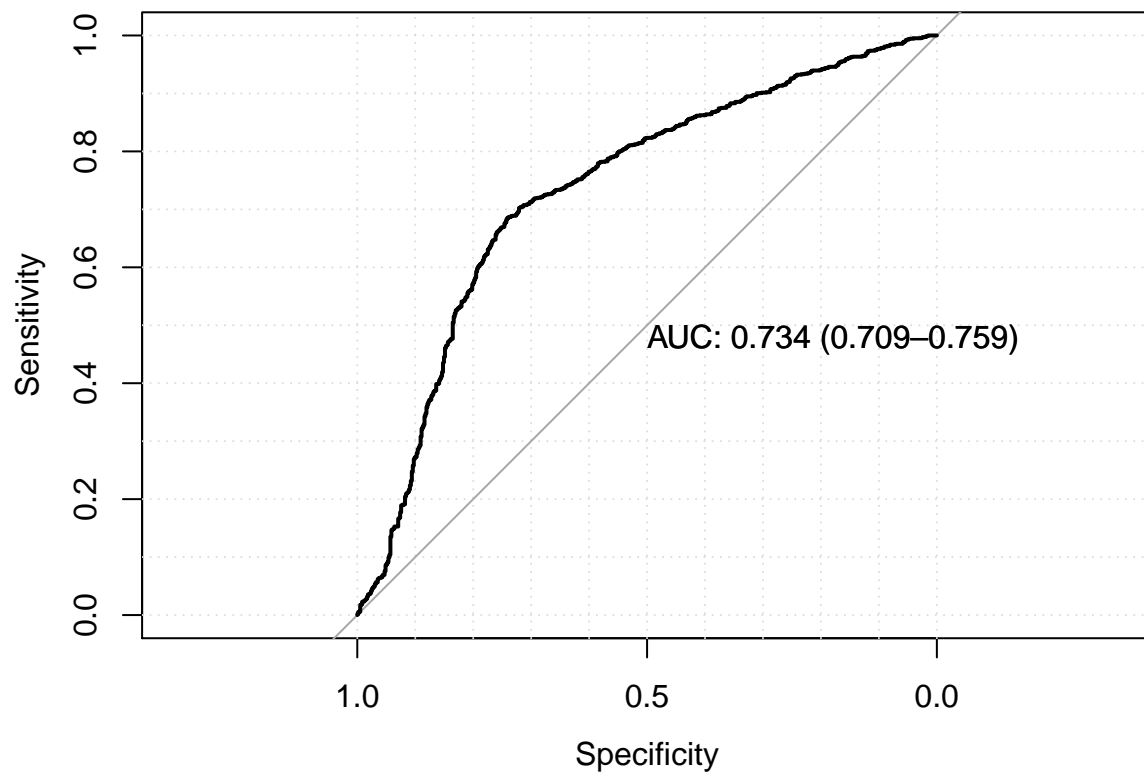


```
## Setting levels: control = 0, case = 1
## Setting direction: controls < cases
```

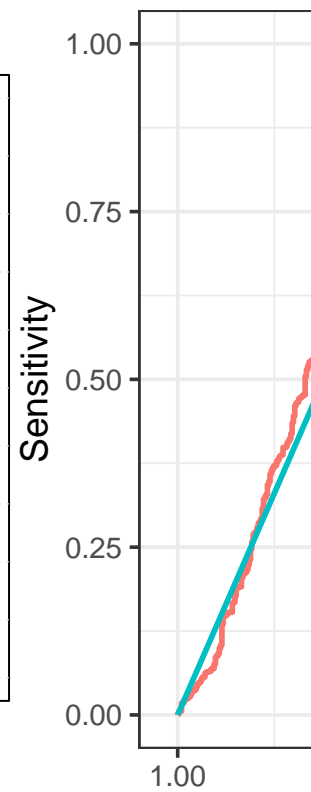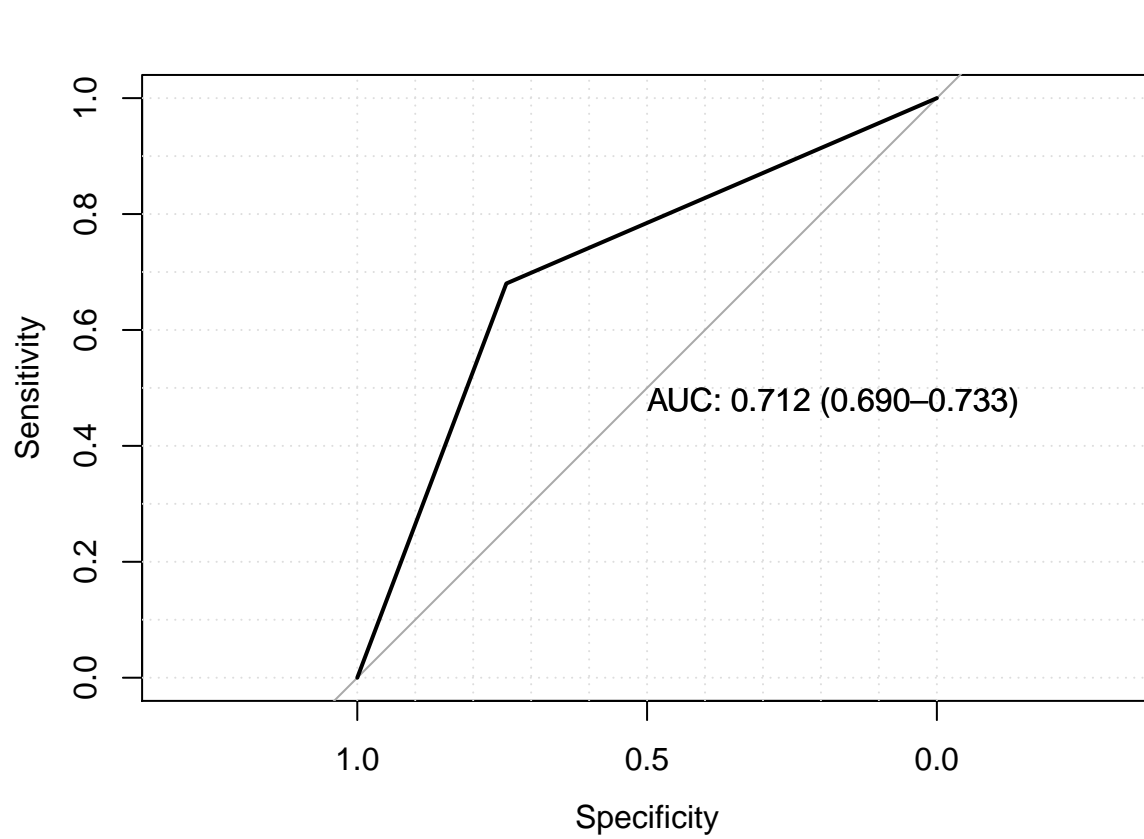

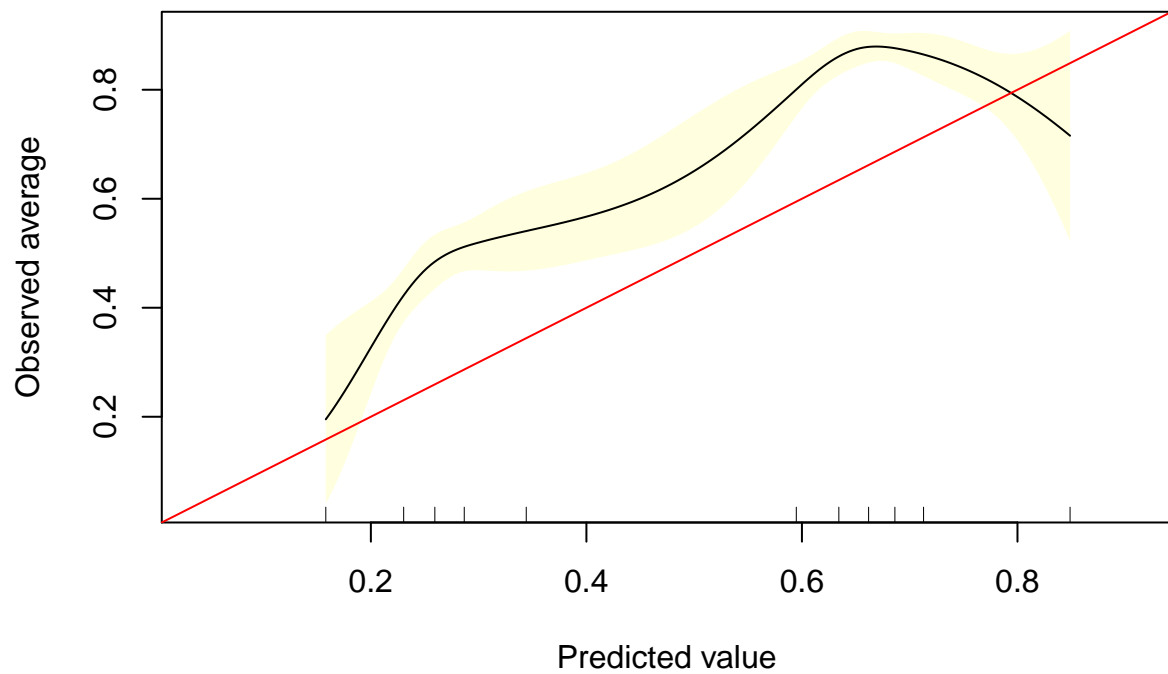


Note: When multiple decision curves are plotted, decision curves for 'All' are calculated using the p

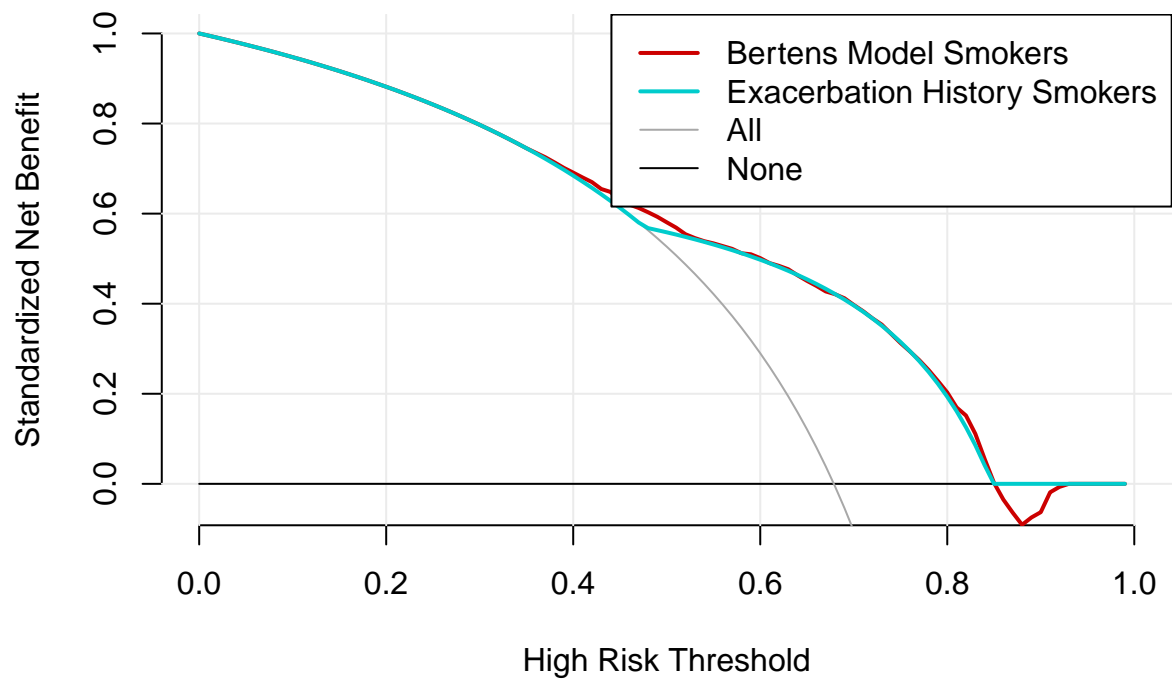



ACCEPT Severe


Setting levels: control = 0, case = 1

Setting direction: controls < cases

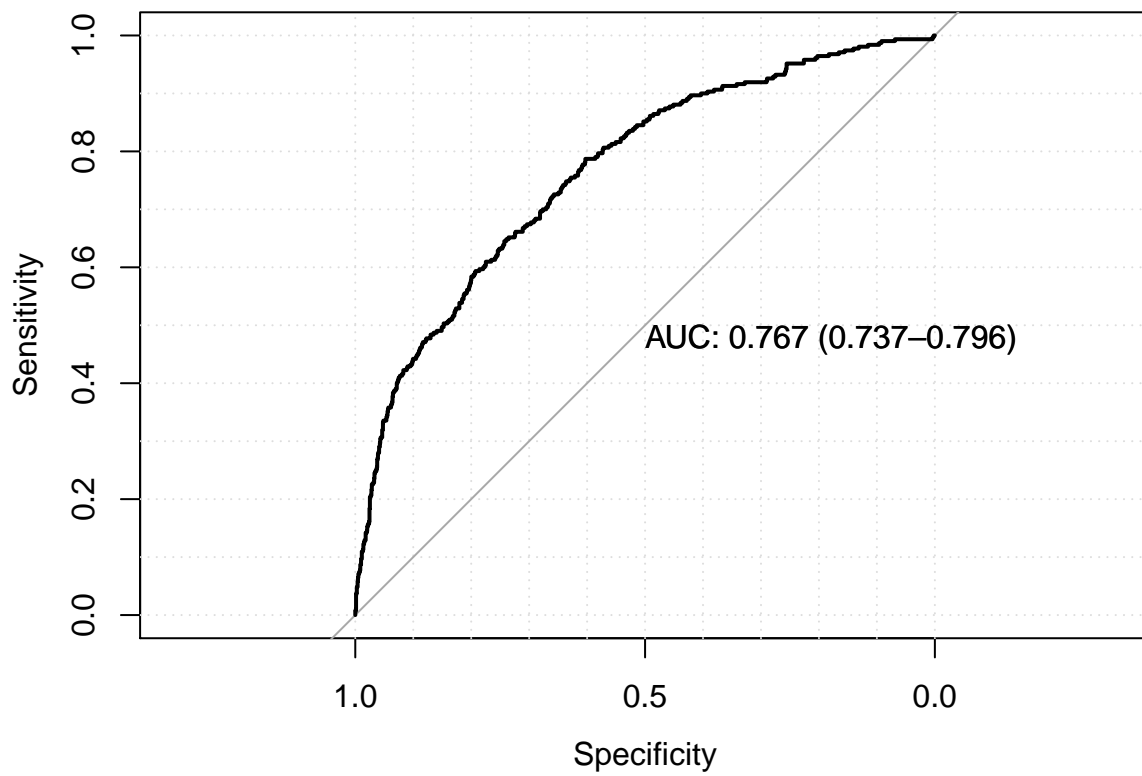


```
## Setting levels: control = 0, case = 1
## Setting direction: controls < cases
```

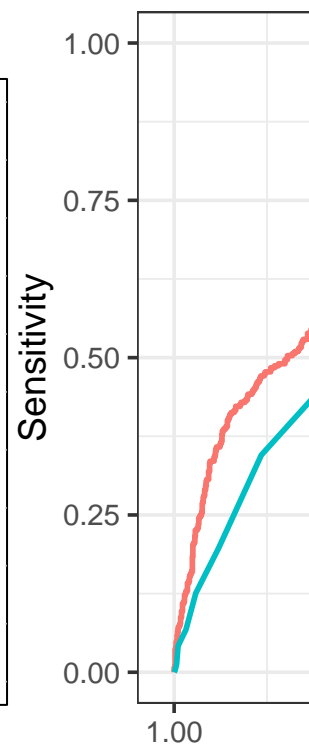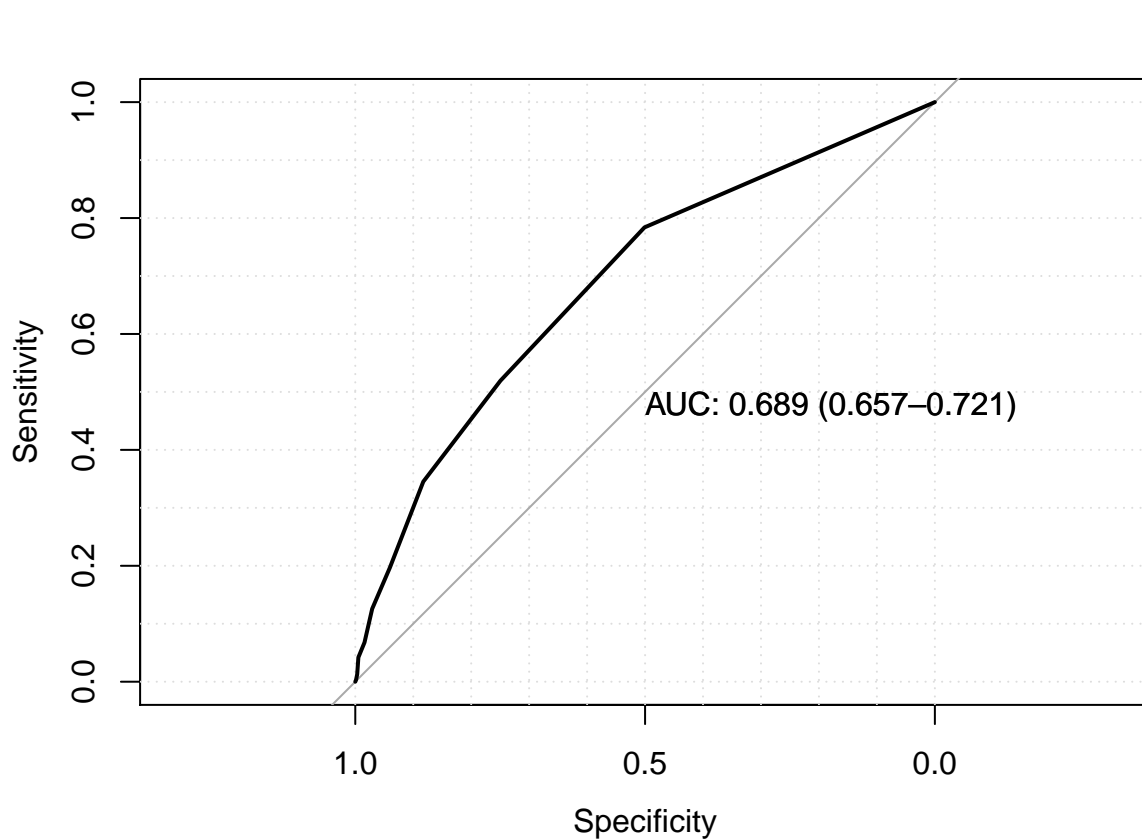

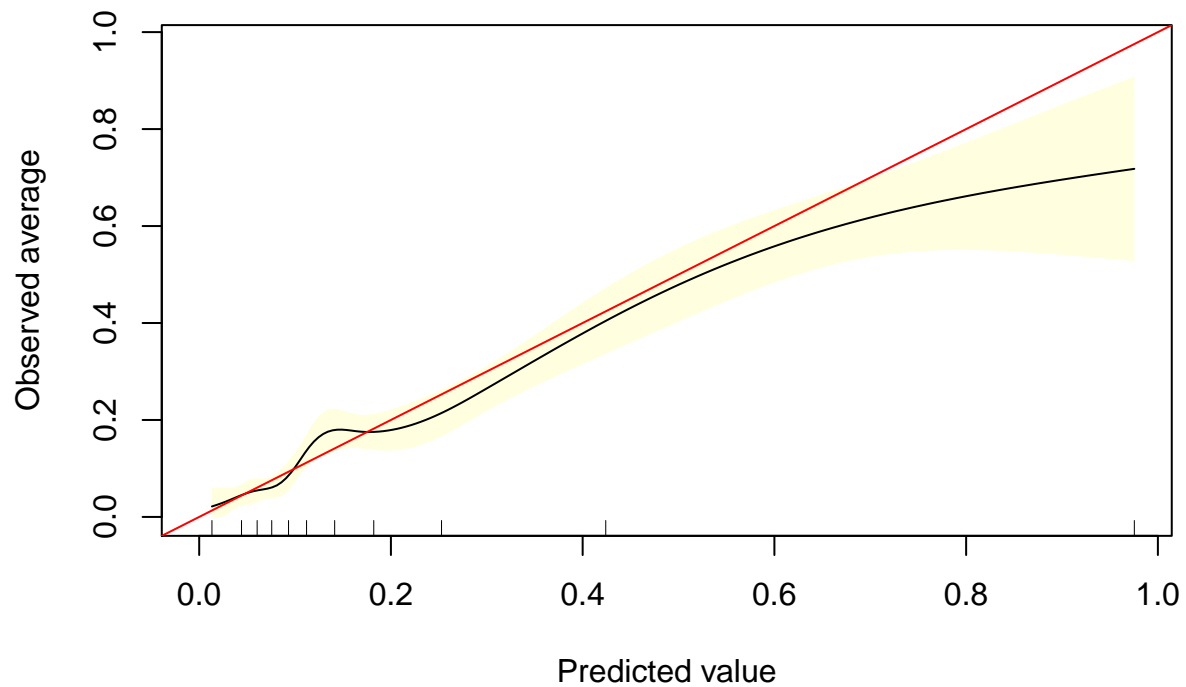


Note: When multiple decision curves are plotted, decision curves for 'All' are calculated using the p


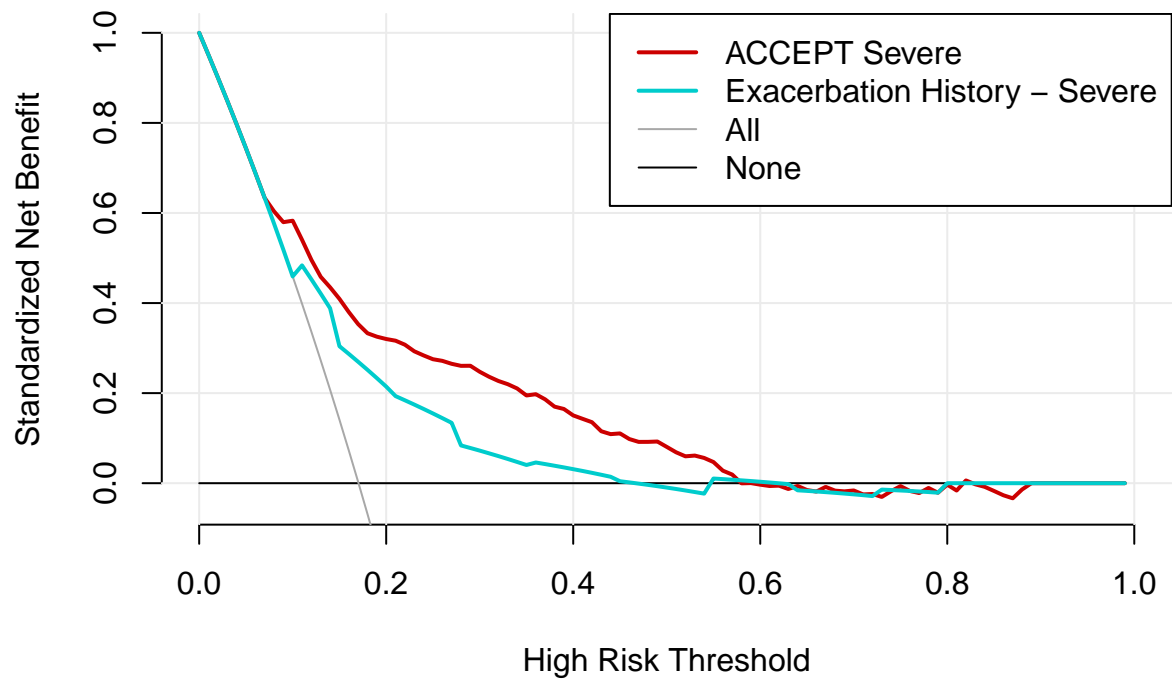



Setting levels: control = FALSE, case = TRUE

Setting direction: controls < cases

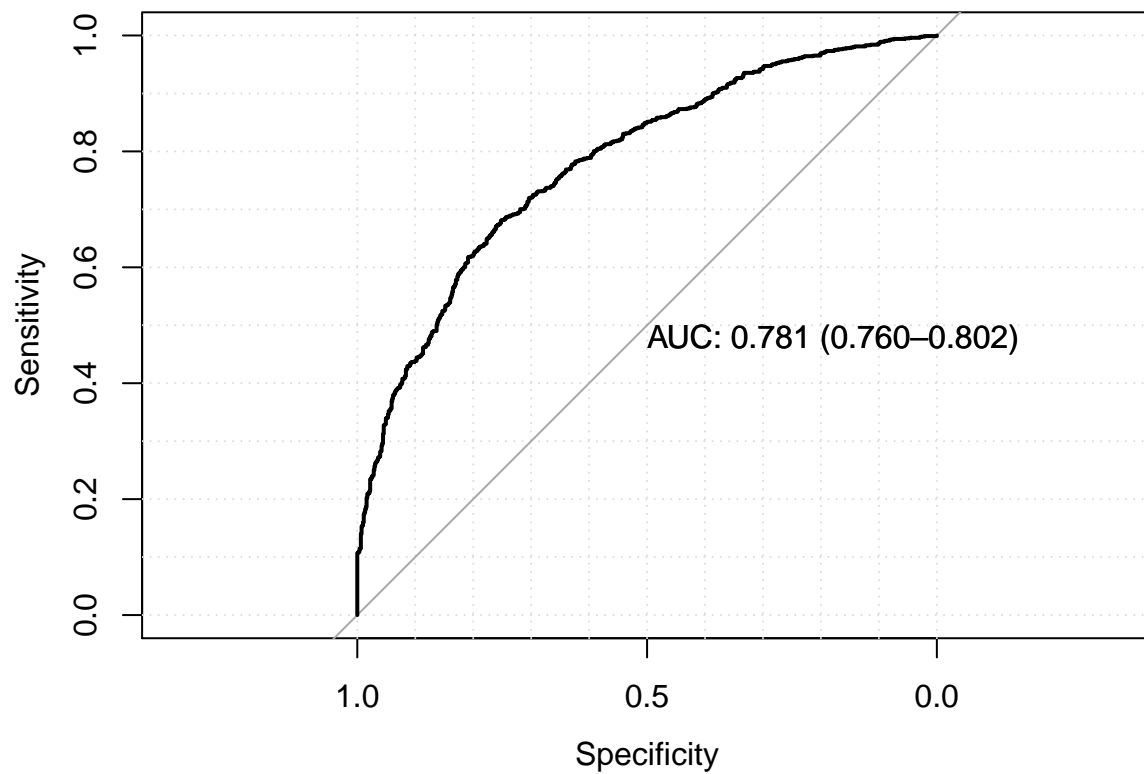

```
## Setting levels: control = FALSE, case = TRUE
## Setting direction: controls < cases
```

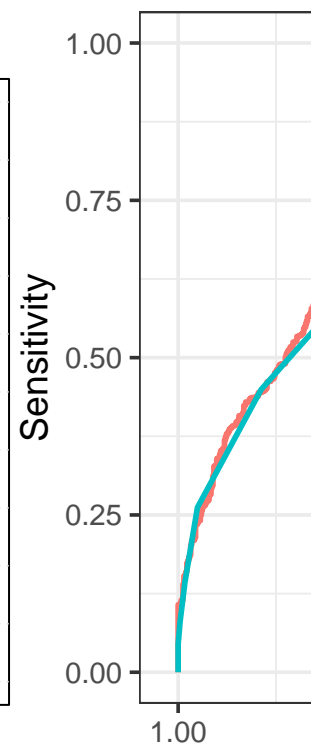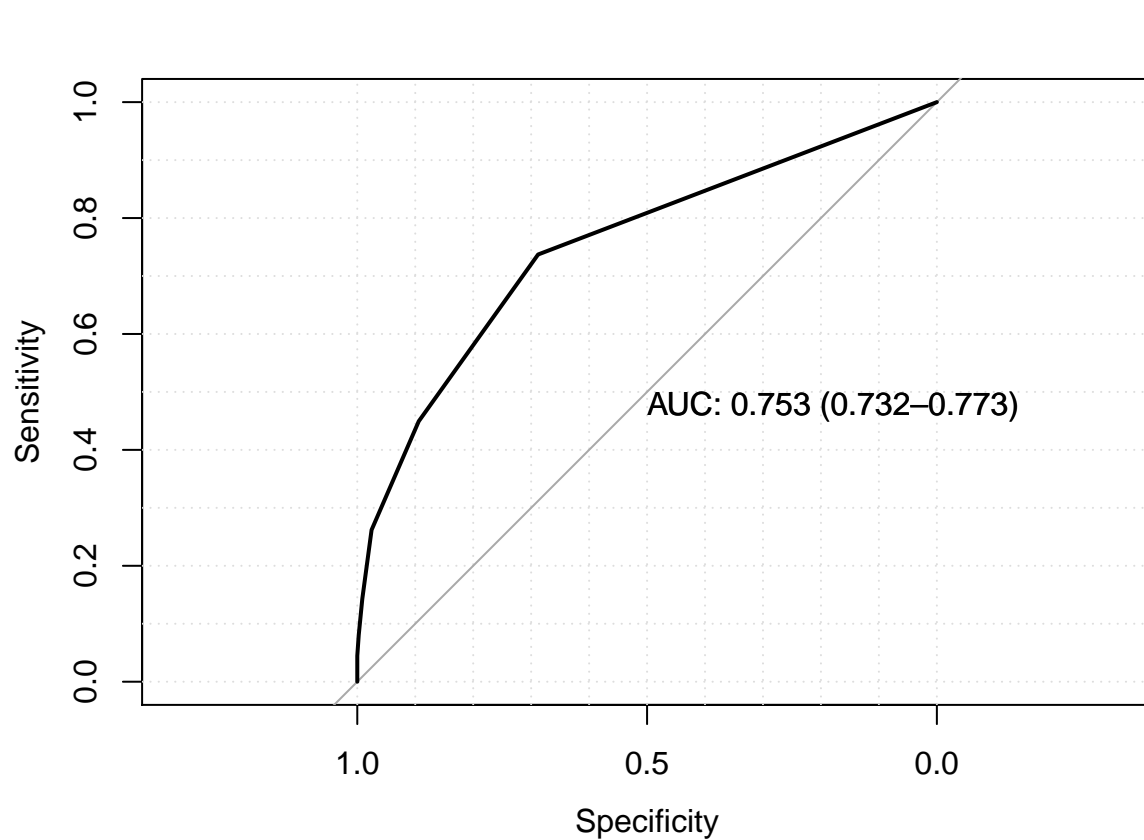

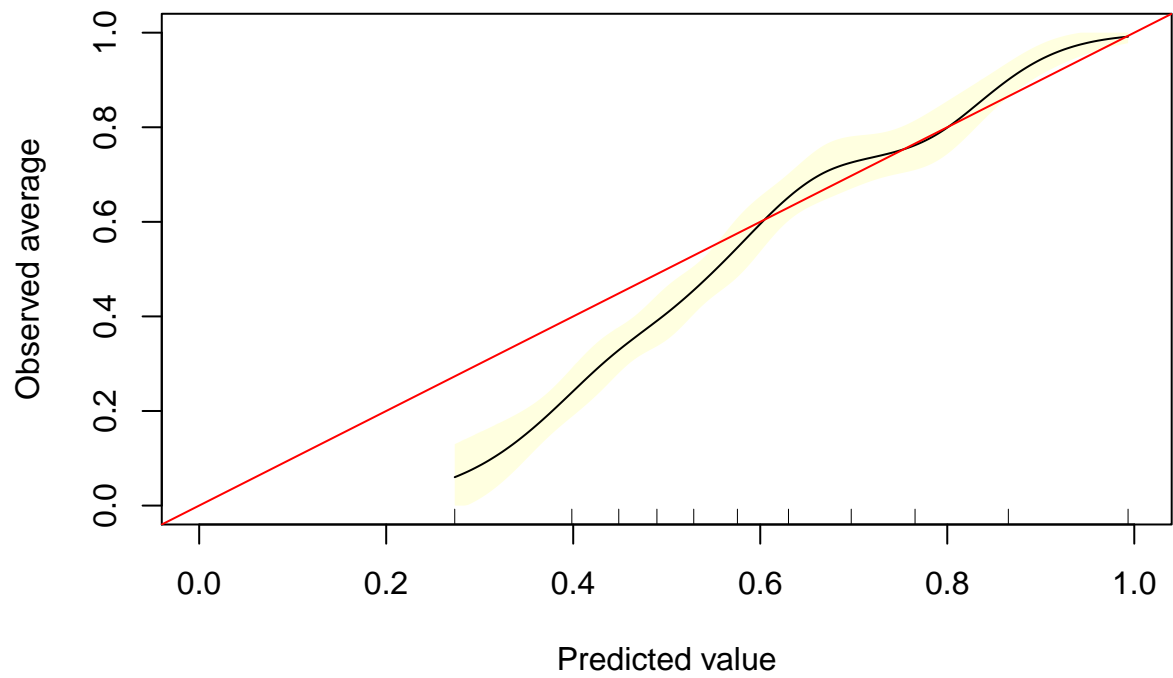

Note: When multiple decision curves are plotted, decision curves for 'All' are calculated using the p

