TD1

sqlplus HR/HR@localhost:1521/ORCLPBD

Exercice 1

1- Lancement de SQL*Plus sans connexion

2- Connexion en tant que SYSDBA

3- Vérification de l'utilisateur connecté - Constat : USER est "SYS"

4- Vérification du conteneur courant

```
C:\Users\HP>sqlplus /nolog

SQL*Plus: Release 19.0.0.0.0 - Production on Sam. Oct. 17 21:10:39 2026
Version 19.3.0.0.0

Copyright (c) 1982, 2019, Oracle.  All rights reserved.

SQL> CONNECT / AS SYSDBA
ConnectÚ.
SQL> show user;
USER est "SYS"
SQL> SHOW CON_NAME;

CON_NAME
------------------------------
CDB$ROOT
SQL> SHOW PDBS;

    CON_ID CON_NAME                       OPEN MODE  RESTRICTED
---------- ------------------------------ ---------- ----------
         2 PDB$SEED                       READ ONLY  NO
         3 ORCLPDB                        READ WRITE NO
```

5- Affichage des PDB et de leur état

```
SQL> ALTER PLUGGABLE DATABASE ORCLPDB OPEN;
ALTER PLUGGABLE DATABASE ORCLPDB OPEN
*
ERREUR Ó la ligne 1 :
ORA-65019: base de donnÛes pluggable ORCLPDB dÚjÓ ouverte
```

```
SQL> ALTER SESSION SET CONTAINER = ORCLPDB;

Session modifiÚe.

SQL> SHOW CON_NAME;

CON_NAME
------------------------------
ORCLPDB
SQL>
```

6- Ouverture du PDB s'il est en MOUNTED

```
USERNAME
--------------------------------------------------------------------------------
   USER_ID CREATED  COM O INH
---------- -------- --- - ---
DEFAULT_COLLATION
--------------------------------------------------------------------------------
IMP ALL
--- ---
DVF
       103 30/05/19 YES Y NO
USING_NLS_COMP
NO  NO


36 lignes sÚlectionnÚes.
```

7- Bascule vers le PDB

```
SQL> alter session set container = pdb1 ;

Session altered.
```

8- Vérification : on doit maintenant être dans PDB

```
SQL> show con_name ;

CON_NAME
------------------------------
PDB1
SQL>
```

9- Liste de tous les utilisateurs visibles

SQL> select * from all_users ;

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

SYS
0 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

AUDSYS
8 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

SYSTEM
9 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

SYSBACKUP
2147483617 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

SYSDG
2147483618 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

SYSKM
2147483619 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

SYSRAC
2147483620 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

OUTLN
13 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

DBSFWUSER
36 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

XS$NULL
2147483638 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

GSMADMIN_INTERNAL
22 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

GSMUSER
23 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

DIP
24 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

REMOTE_SCHEDULER_AGENT
35 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

DBSNMP
57 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

ORACLE_OCM
40 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

SYS$UMF
49 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

APPQOSSYS
58 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

GSMCATUSER
62 30-MAY-19 YES Y YES

USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

GGSYS
63 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

XDB
65 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

ANONYMOUS
66 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

WMSYS
75 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

OJVMSYS
84 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

CTXSYS
86 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

ORDSYS
88 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

ORDDATA
89 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

ORDPLUGINS
90 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

SI_INFORMTN_SCHEMA
91 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

MDSYS
92 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

OLAPSYS
95 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

MDDATA
98 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

DVSYS
1279990 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

LBACSYS
100 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED COM O INH

DEFAULT_COLLATION

IMP ALL

DVF
102 30-MAY-19 YES Y YES
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED   COM O INH

DEFAULT_COLLATION

IMP ALL

PDBADMIN
105 12-OCT-26 NO N NO
USING_NLS_COMP
NO NO

USERNAME

USER_ID CREATED   COM O INH


DEFAULT_COLLATION

IMP ALL

HR
106 12-OCT-26 NO N NO
USING_NLS_COMP
NO NO

37 rows selected.

10- Paramètres d'affichage actuels - Constat : par défaut linesize 80 et pagesize 14

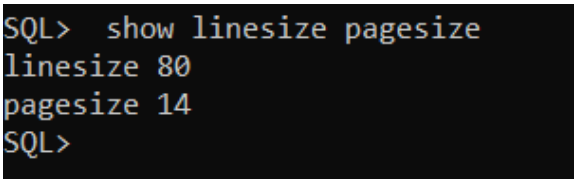

11- Modification pour un affichage plus lisible

```
ORCLPDB
SQL> SHOW LINESIZE PAGESIZE
linesize 80
pagesize 14
SQL> set pagesize 200
SQL> set pagesize 1000
SQL>
```

12- Informations sur HR

```
SQL> select * from DBA_USERS WHERE USERNAME = 'HR';

USERNAME
--------------------------------------------------------------------------------
   USER_ID
----------
PASSWORD
--------------------------------------------------------------------------------
ACCOUNT_STATUS                   LOCK_DAT EXPIRY_D
-------------------------------- -------- --------
DEFAULT_TABLESPACE             TEMPORARY_TABLESPACE
------------------------------ ------------------------------
LOCAL_TEMP_TABLESPACE          CREATED
------------------------------ --------
PROFILE
--------------------------------------------------------------------------------
INITIAL_RSRC_CONSUMER_GROUP
--------------------------------------------------------------------------------
EXTERNAL_NAME
--------------------------------------------------------------------------------
PASSWORD_VERSIONS E AUTHENTI P COM
----------------- - -------- - ---
LAST_LOGIN                                                                    O
------------------------------------------------------------------------------- -
INH
---
DEFAULT_COLLATION
--------------------------------------------------------------------------------
IMP ALL PASSWORD
--- --- --------
HR
       106

EXPIRED & LOCKED                 17/10/26 17/10/26
SYSAUX                         TEMP
TEMP                           17/10/26
DEFAULT
DEFAULT_CONSUMER_GROUP

11G 12C           N PASSWORD N NO
                                                                              N
NO
USING_NLS_COMP
NO  NO  17/10/26
```

13- Structure de la vue DBA_USERS

```
SQL> desc DBA_USERS
 Nom                                       NULL ?   Type
 ----------------------------------------- -------- ----------------------------
 USERNAME                                  NOT NULL VARCHAR2(128)
 USER_ID                                   NOT NULL NUMBER
 PASSWORD                                           VARCHAR2(4000)
 ACCOUNT_STATUS                            NOT NULL VARCHAR2(32)
 LOCK_DATE                                          DATE
 EXPIRY_DATE                                        DATE
 DEFAULT_TABLESPACE                        NOT NULL VARCHAR2(30)
 TEMPORARY_TABLESPACE                      NOT NULL VARCHAR2(30)
 LOCAL_TEMP_TABLESPACE                              VARCHAR2(30)
 CREATED                                   NOT NULL DATE
 PROFILE                                   NOT NULL VARCHAR2(128)
 INITIAL_RSRC_CONSUMER_GROUP                        VARCHAR2(128)
 EXTERNAL_NAME                                      VARCHAR2(4000)
 PASSWORD_VERSIONS                                  VARCHAR2(17)
 EDITIONS_ENABLED                                   VARCHAR2(1)
 AUTHENTICATION_TYPE                                VARCHAR2(8)
 PROXY_ONLY_CONNECT                                 VARCHAR2(1)
 COMMON                                             VARCHAR2(3)
 LAST_LOGIN                                         TIMESTAMP(9) WITH TIME ZONE
 ORACLE_MAINTAINED                                  VARCHAR2(1)
 INHERITED                                          VARCHAR2(3)
 DEFAULT_COLLATION                                  VARCHAR2(100)
 IMPLICIT                                           VARCHAR2(3)
 ALL_SHARD                                          VARCHAR2(3)
 PASSWORD_CHANGE_DATE                               DATE
```

14- Statut du compte HR

```
SQL> select account_status from dba_users where username='HR';

ACCOUNT_STATUS
--------------------------------
OPEN
```

15- Déverrouillage puis définition du mot de passe

```
SQL> ALTER USER HR ACCOUNT UNLOCK;

Utilisateur modifiÚ.

SQL>
SQL> SELECT ACCOUNT_STATUS
  2  FROM DBA_USERS
  3  WHERE USERNAME = 'HR';

ACCOUNT_STATUS
--------------------------------
EXPIRED

SQL>
SQL> ALTER USER HR IDENTIFIED BY HR;

Utilisateur modifiÚ.

SQL>
SQL> SELECT ACCOUNT_STATUS
  2  FROM DBA_USERS
  3  WHERE USERNAME = 'HR';

ACCOUNT_STATUS
--------------------------------
OPEN
```