



**Readability and Impact in Scientific Writing:
A Computational Analysis of arXiv Abstracts**

Project Report

[Amine Habbou]

[Constructor University]

[Academic Writing Skills / Intercultural Training]

[APA-6 Referencing Style]

[15.05.2026]

Abstract

Scientific abstracts are thoroughly not easy to understand, readability does not foresee citation effect, and AI-generated abstracts do not cure this inability to easily understand by audience — these are the three main verdicts of the underlying study. Utilizing a total of 2,272 arXiv abstracts traversing computer science, mathematics, and physics, the following readability metrics were calculated — the Flesch Reading Ease score, the Flesch-Kincaid Grade Level, the Gunning Fog Index, and the SMOG Index — then the citation count for each scientific paper was retrieved using the Semantic Scholar API and then was concatenated into one dataset along with the readability metrics. Three of the four metrics backed the fact that Physics abstracts were the hardest to understand as they ranked as the most linguistically complex. Readability indicated only minor correlations with citation counts ($|\rho| \leq 0.153$), only 4.1% of citation variability was explained by the fitted OLS regression model ($R^2 = 0.041$). Surprisingly, AI-generated abstracts generated by a local language model (Tinylama) were constantly tougher to read than the human crafted ones, as this proved to be statistically significant with $p < 10^{-8}$. These outcomes convey straight inferences for how scientific communication is usually published, how citation effect is inferred, and how AI generated text can be unexpectedly harder to understand in terms of readability metrics.

Introduction

Scientific writing poses an understanding obstacle for its general readers — and this study reckons this posed obstacle through three disciplines. This assertion is not controversial; it comes from the conclusion of a computational analysis of 2,272 scientific abstracts, and this poses a serious threat to science readers, because the echoes

of inaccessible science spread far beyond any individual paper. When the main access point into a scientific research — the abstract — necessitates the alike of a university education degree to grasp, the growing influence is a literature that dismisses interdisciplinary readers, debutant researchers, science correspondents, and the overall public similarly. The convenience of scientific writing is hence not simply an appealing worry but a structural one, with insinuations for how information is communicated, who profits from publicly financed research, and how scientific communities interconnect athwart disciplinary margins.

Readability, generally well-defined as the linguistic easiness with which a reader can handle and understand human text, has been the focus of methodical study since the mid-twentieth century. Introductory measurement metrics — comprising the Flesch Reading Ease score (Flesch, 1948), the Flesch-Kincaid Grade Level (Kincaid et al., 1975), the Gunning Fog Index (Gunning, 1952), and the SMOG Index (Harry & Laughlin, 1969) — measure readability through variables such as word length, sentence length, and syllable count, converting these into either an ease score or a rough university-level-estimate equivalent. While these metrics do not apprehend every aspect of conception, they arrange for a compliant, reproducible, and vastly authenticated foundation for large-scale textual processing. Academic texts were found to be getting harder to understand by the time when applying these metrics (Plavén-Sigra et al., 2017), yet the association between this growing difficulty of understanding academic text and the quantifiable influence of scientific work — as indexed by citation counts — has inherited relatively narrow observed attention.

A further aspect has been familiarized by the recent introduction of large language models (Touvron et al., 2023). . The hypothesis that AI will simplify and clarify academic text is commonly brought in discussions of scholarly communication, yet it's not experimented in terms of analytical study (Wan & Liu, 2014). This study bridges the analysis of these three assumptions: it illustrates readability across scientific abstracts across the three earlier mentioned fields, inspects whether readability is a strong predictor for citation count, and compares the readability of human-authored abstracts with AI-generated rewrites. By doing thus, it focuses on a narrowly defined computational analysis rather than broader issues about scientific accessibility. However, the topic then expands to include their implications for academic publishing, open research, and the regulation of AI in scholarly contexts.

Research Questions

The study is structured around three research questions. What degree of knowledge is necessary to understand scientific abstracts in computer science, mathematics, and physics, according to RQ1? RQ2 examines whether the influence of citations in scientific papers is correlated with readability. RQ3: Are scientific abstracts produced by AI easier to read than those written by humans? A layered empirical explanation of readability in scientific discourse is produced by the questions' progression from descriptive (RQ1) to relational (RQ2) to comparative (RQ3).

Methodology

The arxiv Python package was used to programmatically gather preprint data from the arXiv repository. Three disciplinary categories—computer science, mathematics

and physics were the focus of the queries, which covered contributions from 2010 to 2018. The results were arranged chronologically in descending order. An arXiv identifier, title, field label, abstract text, and publication year were included in each record of the initial pool of about 3,000 papers that were retrieved. Python's `re` module and the `pandas` library were used to pre-process abstracts. This resulted in a cleaned body of text for each paper by methodically removing LaTeX mathematical equations, LaTeX command sequences, embedded URLs, line-break characters, and extraneous whitespace.

Using the arXiv identification as the lookup key, citation numbers for every paper were obtained through the Semantic Scholar API. To control rate constraints, requests were separated with a one-second delay and an exponential backoff technique. The final analysis dataset consisted of 2,272 publications after records for which citation data could not be retrieved were eliminated. The `textstat` package, which uses standardized formulas for all four readability metrics, was used to calculate readability scores for every cleaned abstract. Prior to correlation and regression analysis, citation counts were log-transformed using the natural logarithm of $(\text{count} + 1)$ due to the substantially right-skewed nature of citation distributions. After calculating Spearman rank correlations between each readability metric and raw citation counts, the `statsmodels` package was used to generate an ordinary least squares (OLS) regression model employing all four metrics as predictors of log-transformed citations. Matplotlib and Seaborn were used to create the visualizations. 150 papers were chosen from the corpus for RQ3, and their cleaned abstracts were fed to "Tinyllama"-- a local language model pulled from the framework "Ollama" with instructions to rewrite each abstract with the following prompt: "Rewrite the following scientific abstract in your own way!(approximately same word count if you

want)". The readability of abstracts produced by “Tinyllama” and humans was compared using paired-samples t-tests and Wilcoxon signed-rank tests.

Results

RQ1: Educational Level Required to Comprehend Scientific Abstracts

Physics is routinely the most complicated of the three fields, all of which create abstracts that require considerable university knowledge to understand. This result holds true for both mean scores and distributional shape and is consistent across three of the four readability metrics. The mean Flesch Reading Ease score for all 2,272 papers in the dataset was 24.18, which is well below the traditional cutoff of 60 for secondary school reading and below 30 for college-level difficulty. Figure 1 shows the distribution of Flesch scores, which is somewhat bell-shaped, centered around 20 to 25, and has a noticeable right skew. The vast majority of articles fall between 10 and 40, with very few exceeding 60. Considering only this distribution is sufficient to prove that scientific abstracts in these three major fields are not accessible to general readers.

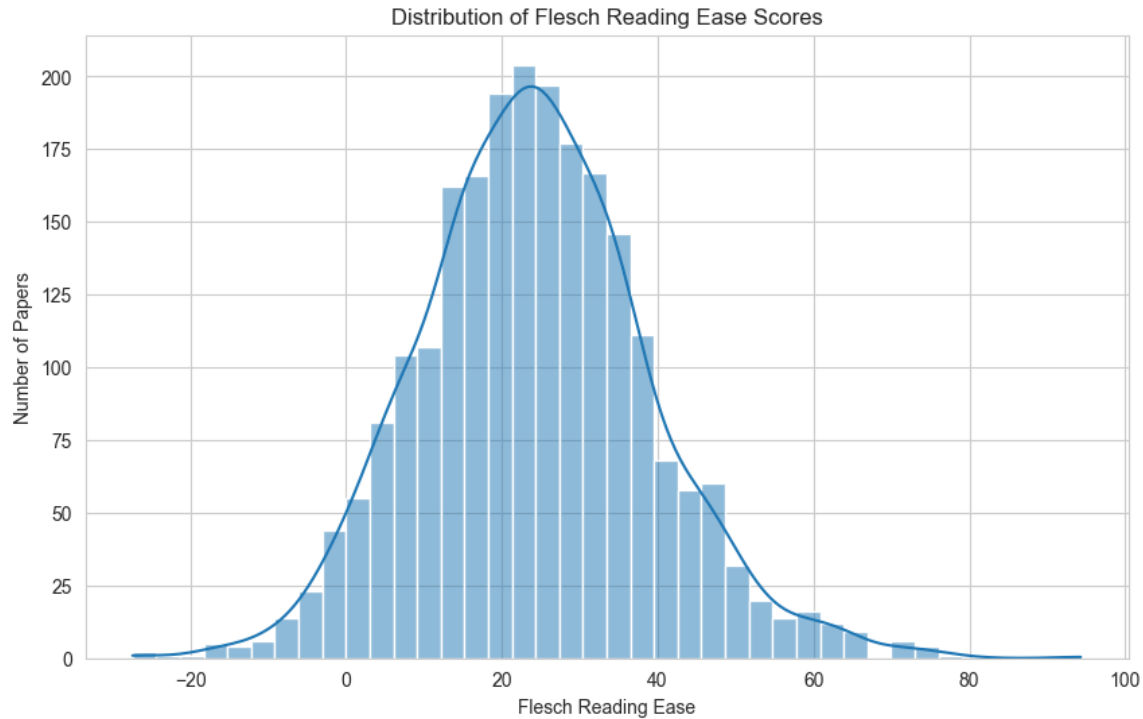


Figure 1. Distribution of Flesch Reading Ease scores across the full dataset

Comparisons at the field level significantly improve this claim. Physics had the lowest mean (19.89), followed by computer science (23.34) and mathematics (29.26) on the Flesch Reading Ease scale, where higher scores imply greater ease. The three grade-level measures, which all describe difficulty as years of schooling required, support this ordinal classification, with physics being the toughest and mathematics being the easiest. The Gunning Fog Index means were 20.24, 18.72, and 18.58, respectively; the SMOG Index means were 17.61, 16.57, and 16.33; and the Flesch-Kincaid Grade Level means were 16.53 for physics, 15.65 for computer science, and 15.03 for mathematics. These discrepancies are physically shown by the boxplots in Figures 2 and 3, which show that physics abstracts consistently occupy higher grade-level territory. The most severe upper outliers and the biggest interquartile ranges reach grade levels above 28 to 30.

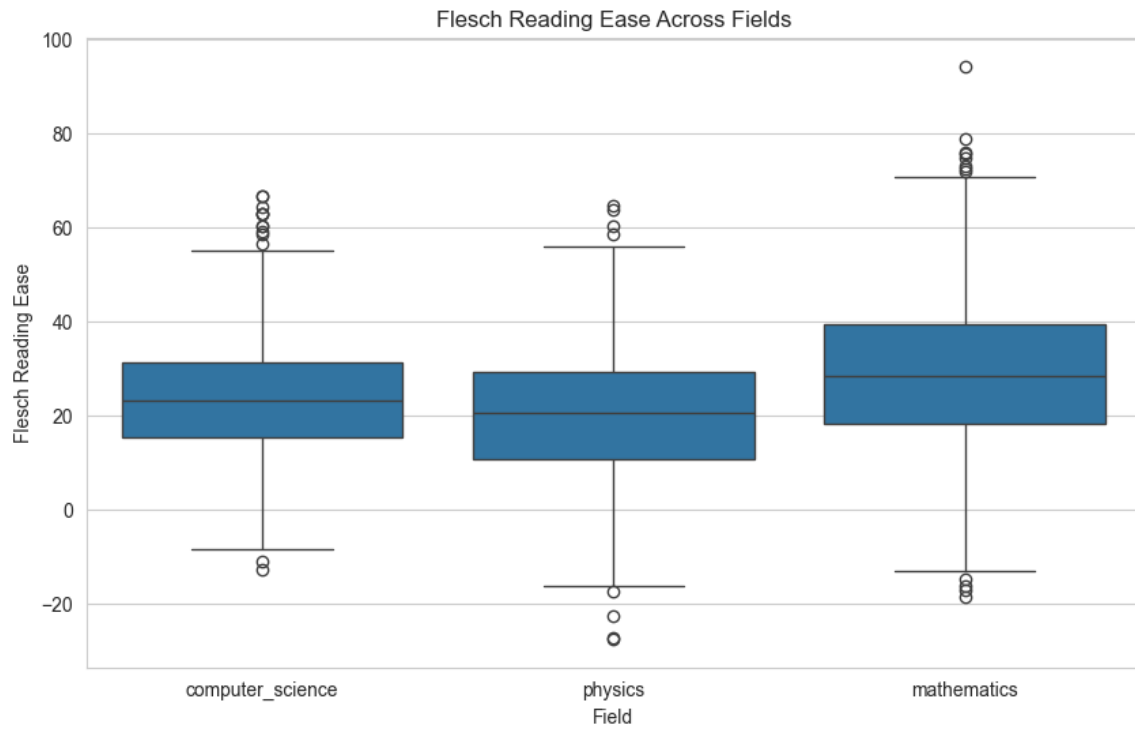


Figure 2. Flesch Reading Ease across Fields—Box Plots

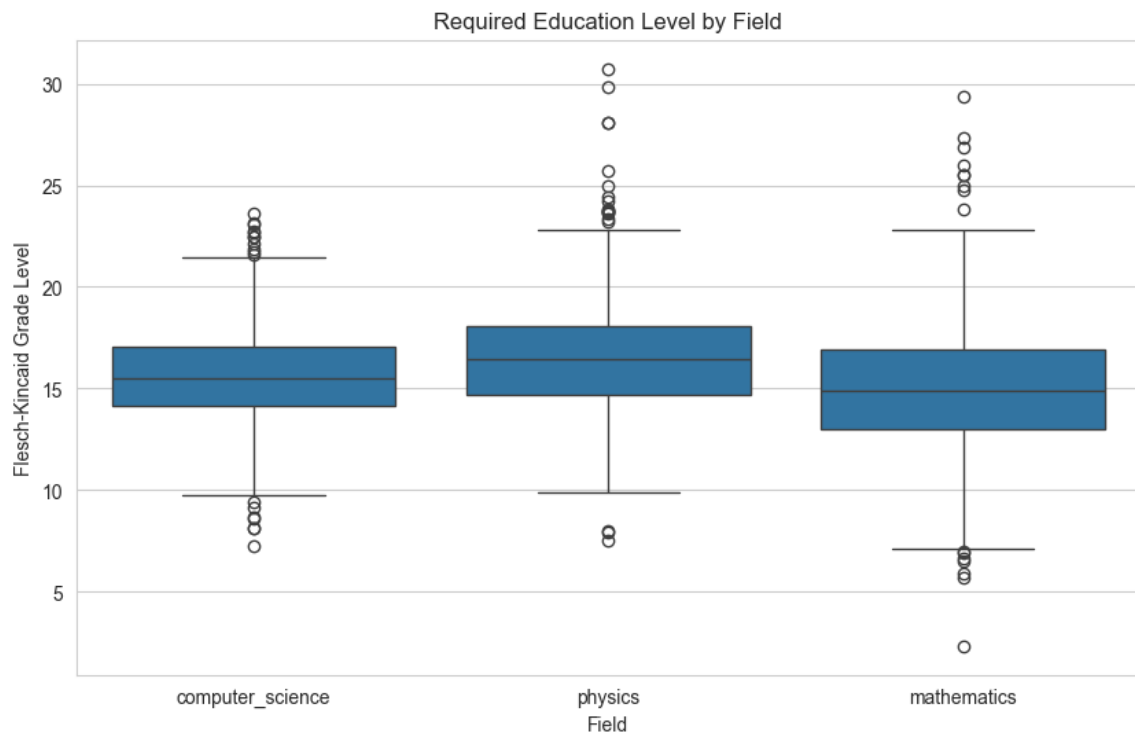


Figure 3. Flesch-Kincaid Grade Level across Fields—Box Plots

The removal of LaTeX notation in mathematical texts reduces sentence length and syllable density, which readability formulae translate directly into lower complexity scores. This is probably why mathematics performs best on grade-level metrics despite the technical density of the discipline. Therefore, rather than the conceptual depth of mathematical writing, what the data captures is its prose component, which tends toward shorter, more carefully constructed phrases. In contrast, all four metrics are well-positioned to identify the mix of complex nominal phrases, multiple embedded clauses, and extensive technical reasoning seen in physics abstracts. The common finding, however, outdoes field differences: no discipline actually produces abstracts that a general reader (i.e. a non-field-specialist) can easily navigate without the need of deep knowledge in the related field, and the grade-level equivalents of 15 to 17 across all fields back this claim and intuitively filter out the vast majority of normal readers in terms of the capability of thorough comprehension of abstracts.

RQ2: Relationship Between Readability and Citation Impact

The influence of citations is not significantly predicted by readability. This is the main conclusion of the regression and correlation studies, and it needs to be made clear before the statistical information is given because the numbers might give the wrong impression or might be misleading at first encounter. All readability metrics and raw citation counts have very significant Spearman rank correlations: Flesch-Kincaid Grade Level $\rho = 0.114$ ($p = 5.15 \times 10^{-1}$), Flesch Reading Ease $\rho = -0.153$ ($p = 2.44 \times 10^{-1}$), Gunning Fog $\rho = 0.082$ ($p = 9.75 \times 10^{-1}$), and SMOG Index $\rho = 0.094$ ($p = 7.02 \times 10^{-1}$). These p-values are all vanishingly tiny. However, none of the impact sizes are significant.

The absolute magnitude of all four ρ values is less than 0.16, which by conventional standards indicates insignificant to minor impacts.

Using all four readability measures as simultaneous predictors of log-transformed citation counts, the OLS regression model produced an overall F-statistic of 24.44 ($p = 7.84 \times 10^{-22}$), an R-squared of 0.041, and an adjusted R-squared of 0.040. The practical result is clear despite this model being highly statistically significant as expressed by the very small p-values: readability as a whole accounts for just 4.1% of the variance in citation counts, leaving other “unknown” factors to account for 95.9% of that variance. Among the individual predictors, the SMOG coefficient was positive and significant ($\beta = 0.175$, $p = 0.012$), while the Flesch Reading Ease coefficient was negative and significant ($\beta = -0.033$, $p < 0.001$) and Gunning Fog ($\beta = -0.214$, $p < 0.001$). There was no independent predictive value from the Flesch-Kincaid Grade Level ($\beta = -0.003$, $p = 0.939$).

The lack of a consistent directional association between readability and influence on citations is further shown by the contradictory indications (i.e. conflicting positive and negative signs) among significant coefficients.

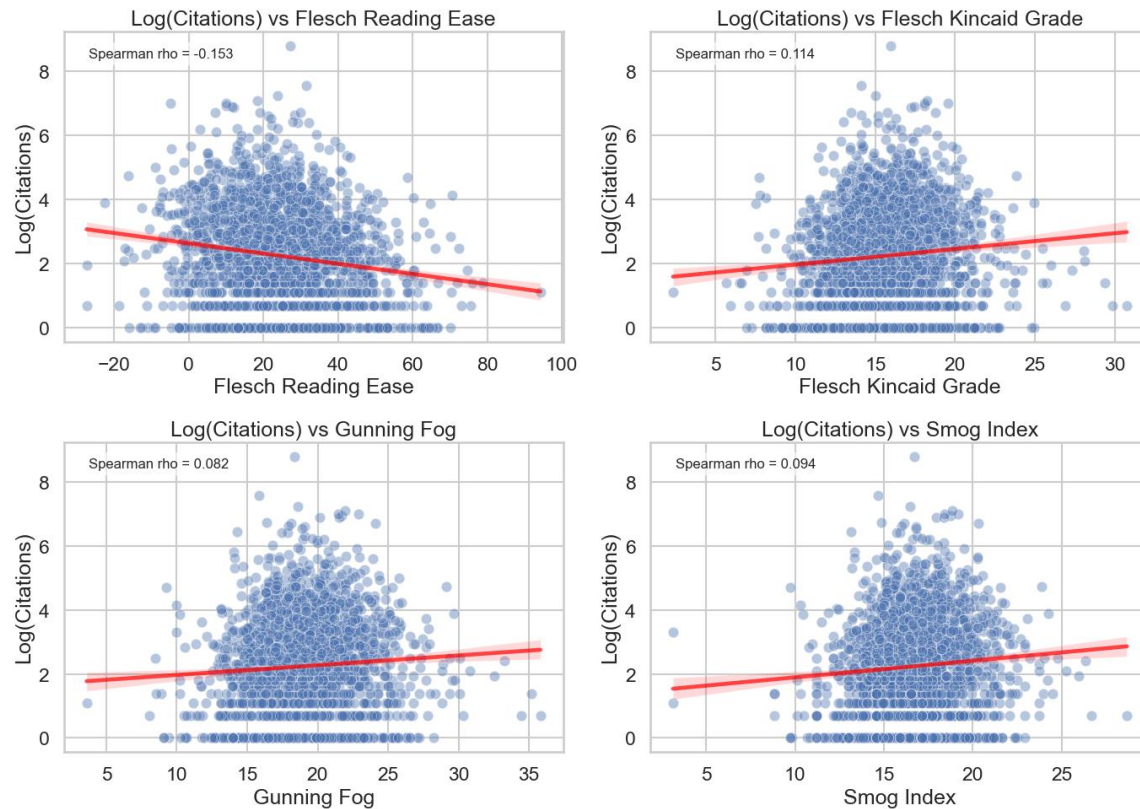


Figure 4. Scatter plots of $\log(\text{Citations} + 1)$ against each of the four readability metrics

The dissimilarity between statistical importance and practical importance is very crucial here. A well-known characteristic of large-sample hypothesis testing is that associations with no concrete substantial meaning frequently exceed conformist significance criteria, taking into account that the sample put in question consists of 2,272 publications. The Flesch Reading Ease score distributions across citation quartiles are almost identical, with mostly overlapping interquartile ranges and little discernible development from Q1 (least cited) to Q4 (most cited), as the figure 5 illustrates. The SMOG, Gunning Fog, and Flesch-Kincaid distributions exhibit the same behavior across different quartiles; they are flat. When combining the findings all together, the scatter plots, the quartile distributions and the regression model R-squared value (0.041), they provide a clearer picture: methodological novelty, positioning within prominent research

debates, and network effects within citation communities are the actual elements that drive citation amassing, and they are completely independent with regards of how a paper can be classified as easy or hard to read.



Figure 5. Flesch Reading Ease scores across citation quartiles (Q1 = lowest 25% of citation counts; Q4 = highest 25%).

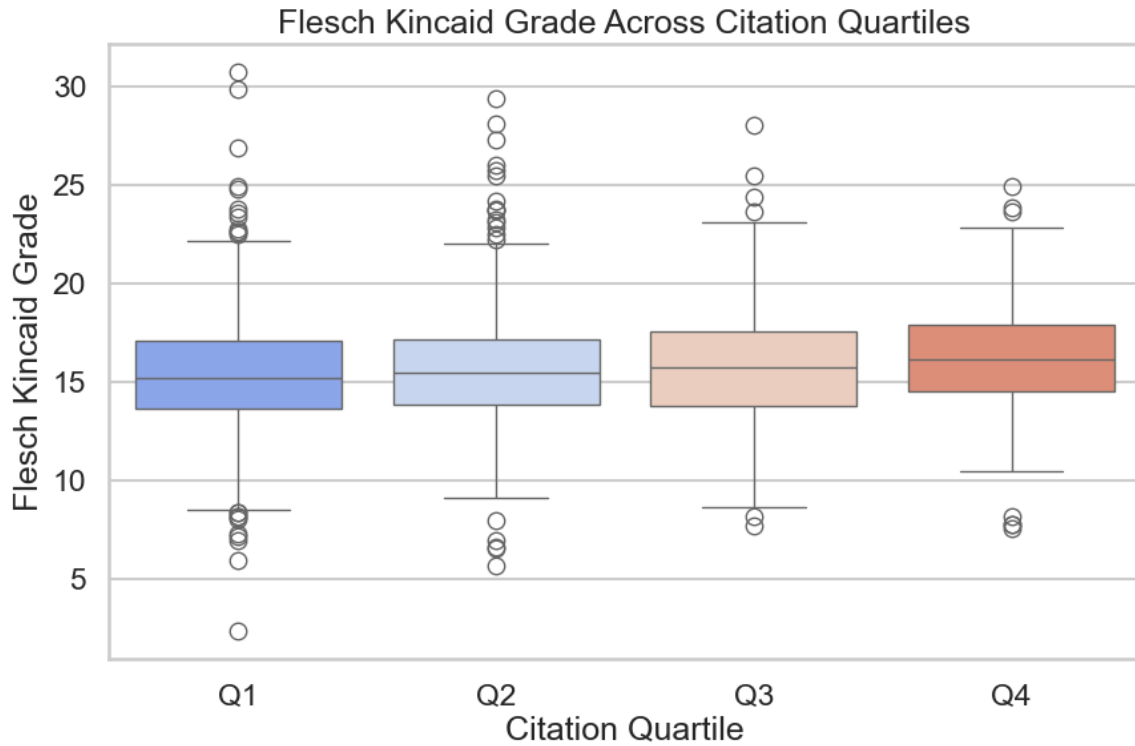


Figure 6. Flesch Kincaid Grade scores across citation quartiles (Q1 = lowest 25% of citation counts; Q4 = highest 25%).

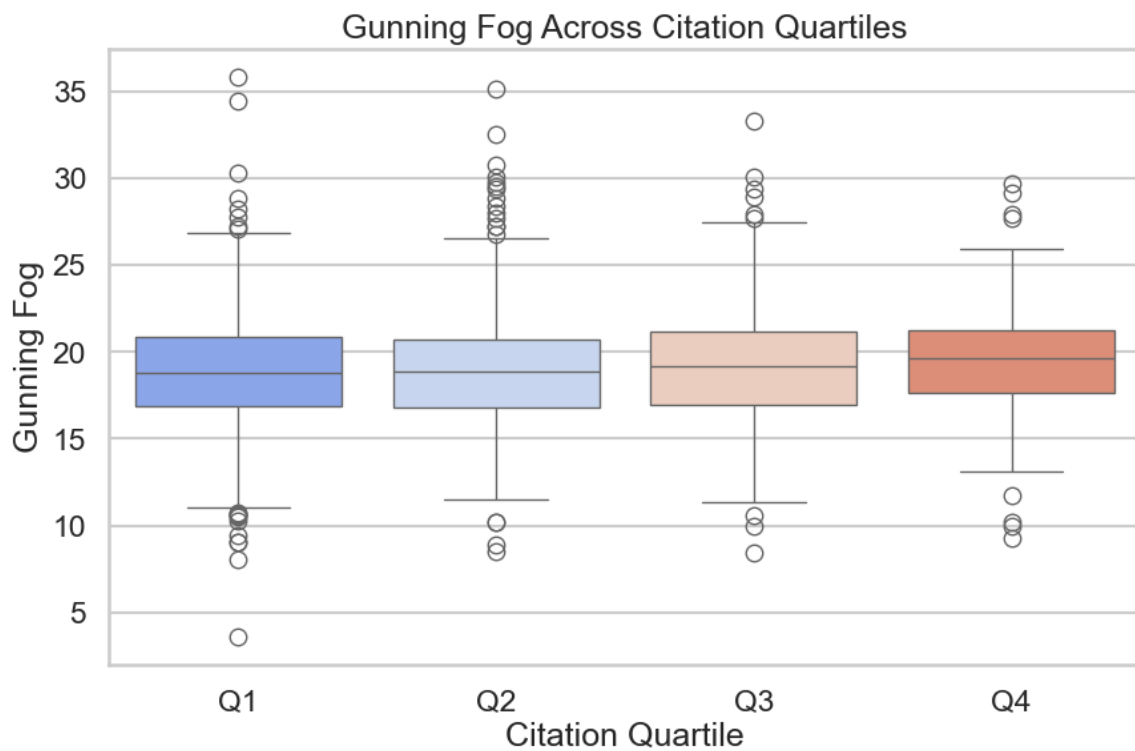


Figure 7. Gunning Fox scores across citation quartiles (Q1 = lowest 25% of citation counts; Q4 = highest 25%).

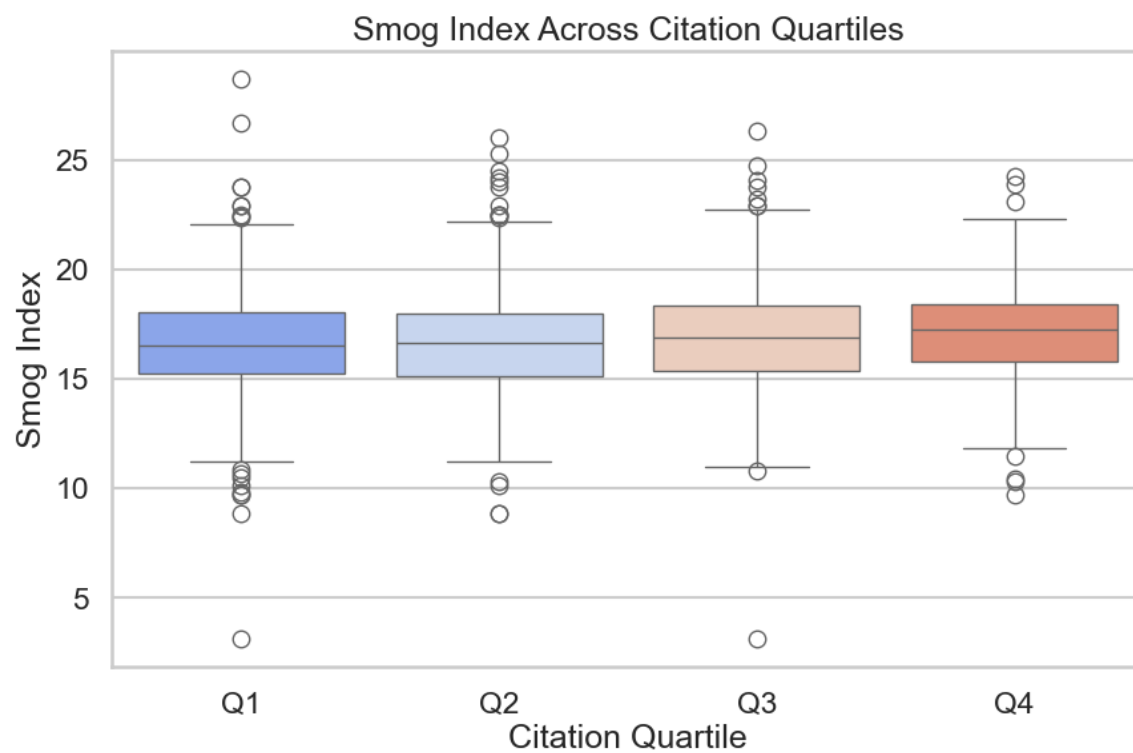


Figure 8. Smog index scores across citation quartiles (Q1 = lowest 25% of citation counts; Q4 = highest 25%).

RQ3: Human-Authored versus AI-Generated Abstracts

AI-generated abstracts are more difficult to comprehend than the human abstracts versions they replace, and this contradicts the original hypothesis made. The difference is illustrated clearly across all four criteria. A difference of 7.16 between the human abstracts and the AI versions in terms of the Flesch Reading ease metric. The Flesch-Kincaid Grade Level mean augmented by almost 1.6 grade levels, from 15.68 for human abstractions to 17.27 for AI abstracts. SMOG averages were 16.73 (human) while 17.81 (AI), while Gunning Fog means were 18.97 (human) versus 20.54 (AI). In other terms,

there was no presence of a single metric that favors AI generated abstracts over human ones.

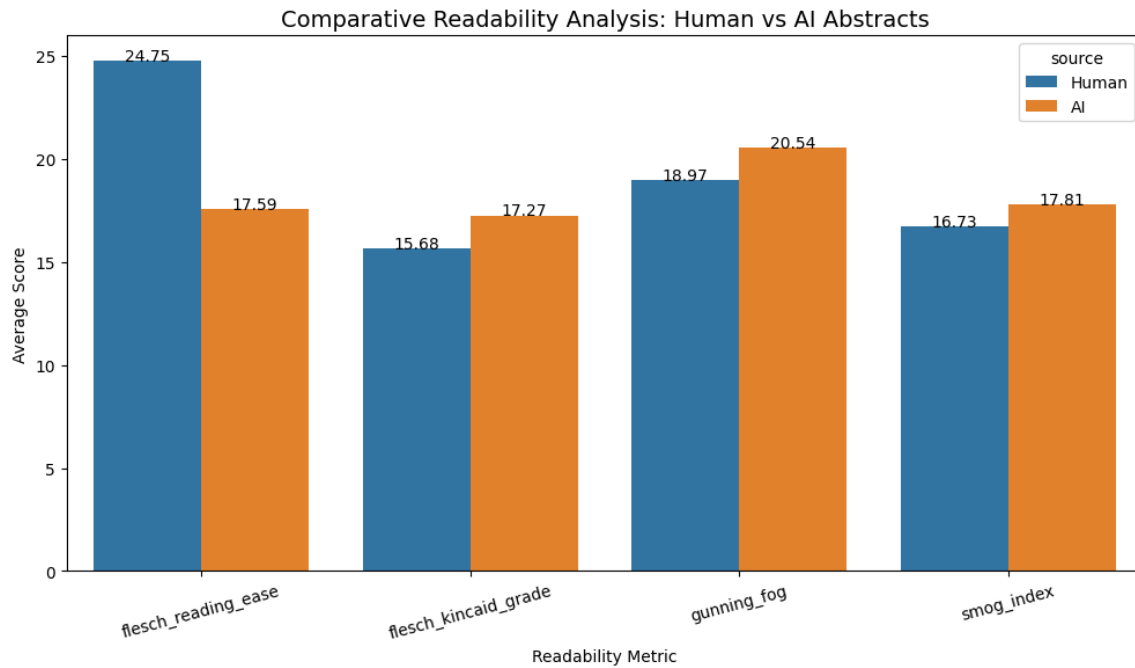


Figure 9. Comparative bar chart of mean readability scores for human-authored and AI-generated abstracts ($n = 150$ pairs)

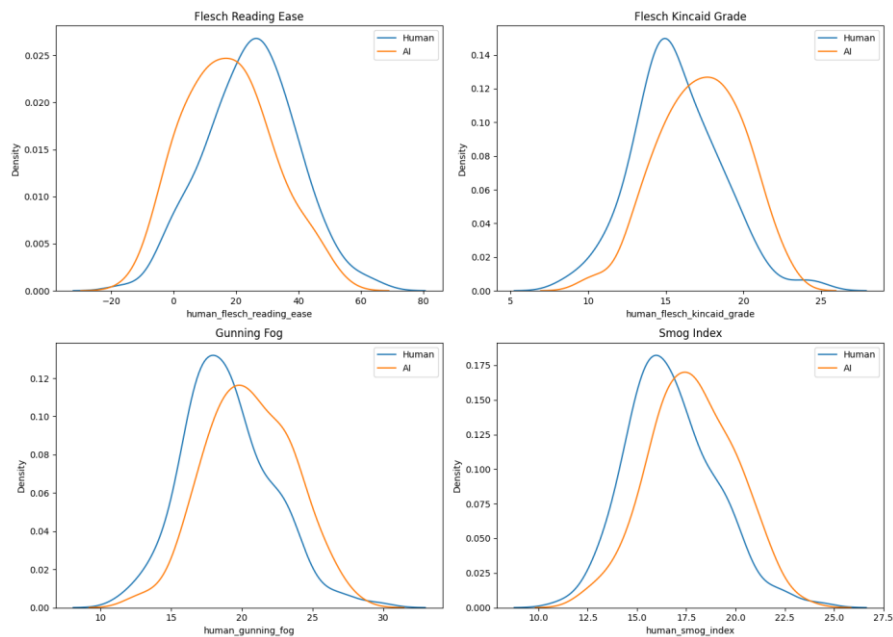


Figure 10. Distributional Comparison of Readability Metrics: Human vs. AI-Generated Scientific Abstracts

Each difference's statistical significance was verified using paired-samples t-tests. Flesch Reading Ease: $t = 6.776$, $p = 2.69 \times 10^{-1}$; Kincaid-Flesch Grade: $t = -6.752$, $p = 3.04 \times 10^{-1}$; SMOG Index: $t = -6.036$, $p = 1.20 \times 10^{-1}$; Gunning Fog: $t = -6.158$, $p = 6.53 \times 10^{-1}$. Robustness to distributional assumptions was proved using Wilcoxon signed-rank tests, which returned completely reliable conclusions. The complete distributional comparison for all four measures is shown in Figure 11, which shows that AI distributions move towards higher complexity rather than just a change in means. The human distributions consistently exhibit heavier tails in the readable direction, while the AI distributions' interquartile ranges are pushed higher on all grade-level indicators and downward on Flesch Reading Ease.

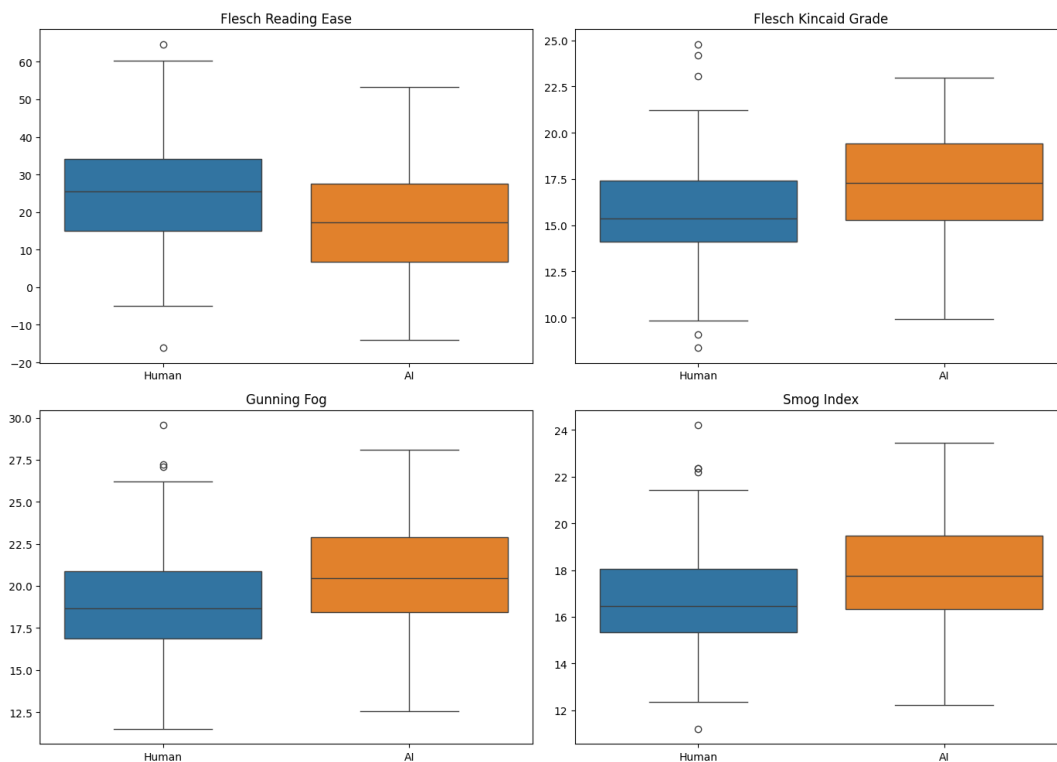


Figure 11. Side-by-side boxplots comparing the full distributions of human-authored (blue) and AI-generated (orange) abstracts across all four readability metrics (n = 150 pairs).

The most prospective elucidation for this result lies in the training dynamics of relatively smaller (in terms of trained number of parameters), locally hosted language models like the one used “Tinyllama” to rewrite the human abstracts. Such models have an inclination to over-index on the most properly complex register found in their training data in the absence of the proper extensive reinforcement learning from human input that calibrates frontier models toward natural, understandable writing. The model in this study seems to have learned to execute academic formality by amplifying exactly the characteristics that readability measures penalize the most, such as long sentences, complex noun phrases, and strong subordinate embedding. The end product is literature that has more grammatical opacity than even the original scientific papers, yet on the surface it seems like high-status academic language.

Discussion

The three findings come together to form a distinct, fundamentally significant conclusion: scientific writing is deeply inaccessible, self-sustaining, and not easily remedied by technology intervention or citation market dynamics. Each finding adds a unique aspect to this conclusion, and when they are combined, they show something that no single finding could prove on its own. The baseline is set by the RQ1 results, which show that comprehending scientific abstracts in all three fields necessitates the equivalent of a postsecondary education. In opposition to the notion that mathematics would be the harder to grasp, physics abstracts occupied this position. This conclusion highpoints a crucial variance between conceptual and language complexity. When mathematical writing is stripped of its notation, it leans toward concise and rationally ordered phrases, whereas physics writing assorts lengthy

arguing language with complex technical vocabulary. This dissimilarity matters because readability metrics measure linguistic surface features, not conceptual depth, and the two can diverge markedly. Yet the wider finding positions regardless of disciplinary arrangement: no field produces abstracts that a non-specialist could understand easily. This is not a performance matter of individual researchers; it is a genre norm, and genre norms are preserved by the collective anticipations of reviewers, editors, and disciplinary communities. Changing them requires institutional involvement rather than individual effort.

The RQ2 results defy a principally resulting assumption in science communication discourse: that accessible academic writing is remunerated by greater citation impact. The findings demonstrate that the contrary is true, or more accurately, that the influence of citations is independent of readability. Refining an abstract's readability won't raise a paper's citations on its own, thus an R-squared of 0.041 isn't just a weak finding; it's a null result dressed in significance. This has a significant influence on how the argument for clear scientific writing is brought to the picture. This study disproves the claim made by readability advocates that more citations result from clearer abstracts. Instead, the case for accessible scientific writing must be based on its inherent worth, which includes multidisciplinary collaboration (Rakedzon et al., 2017), equity of access, and the moral need to convey publicly financed research in a manner that is readable by its supporters (Tenopir & King, 2004) .

The RQ3 results add an instructive dimension that is mostly well-timed. The rising reliance on AI writing tools in academic settings is frequently defended by the supposition that AI generates cleaner, more accessible text outcome than human authors

(Wan & Liu, 2014). This study shows that this hypothesis is false at least for the scope of the data (150 abstracts) fed to the fixed language model “Tinyllama”. And it constantly fails for both parametric and non-parametric tests as well as all four measures. Instead of just producing a different abstract with different words, the “Tinyllama” produced outcome which will require an extra year or two of education in average to be grasped by the reader . This outcome needs to result in a careful review of the situations where AI tools can genuinely help achieve accessibility goals. These factors—like how big the model is, what it's trained on, and how it's fine-tuned—decide if a tool improves or worsens the way texts communicate; they aren't just small technical things. Using AI for accessibility can actually make the problem it's meant to solve worse if we don't carefully check how easy the content is to read and understand.

When put together, the three results change how we see the problem of sharing scientific information. The issue isn't just that individual researchers write badly; it's that the rules, tools, and rewards in academic writing make it hard for people to understand. To tackle this, people at different levels need to work together: journals must require simple summaries, funding groups should ask for easy-to-understand reports, teaching should focus on clear and accurate writing, and AI tools should be designed to help with accessibility, not just to make things more complicated. None of these actions will work on their own, and none of them happens naturally without changes to the current system.

Limitations

Some limitations should be noted when applying the results of this study to other situations. The dataset includes only papers from arXiv, which is a website where

researchers share their work before it's officially published. This site has a specific focus in certain academic areas and the authors who use it choose to share their work there. Because of this, the way papers are written, how they cite other works, and what audience they're aiming for might be different compared to papers that are only published in traditional peer-reviewed journals. So, the results from this study shouldn't be used to make generalizations about all types of academic publishing. The focus on data from around 2018 makes the results less useful now: the way research is published and the language used in scientific summaries have changed since then, especially after 2022 when AI tools became widely used. The four readability measures look at basic language features like word length, sentence length, and syllable count. They don't take into account more complex aspects of how easy a text is to understand, such as how clear the ideas are, what background knowledge readers need, or how well the story flows (Plavén-Sigra et al., 2017). A text might do well on all four measures but still be very hard to understand for people who aren't familiar with the subject. The RQ3 analysis was limited to 150 papers because running the local model predictions required a lot of computer power, and the findings might not apply to bigger, more advanced models that have been heavily trained using a lot of human input. In the end, the particular language model being used might have its own unique style that doesn't reflect the general style of AI-assisted academic writing.

Conclusion

This study provides three clear answers to its three research questions. To understand scientific abstracts in computer science, mathematics, and physics, you usually need a university-level education — about 15 to 17 years of formal schooling —

and physics is generally the most difficult subject in three out of the four areas measured. Readability does not have a strong connection to how much a paper is cited. The links between how easy a paper is to read and how often it is cited are very weak. Even when looking at all the factors together, the model can only explain about 4% of the differences in how many times a paper is cited. This means that how easy a paper is to read is not closely tied to its influence in academic circles (Plavén-Sigra et al., 2017). Abstracts made by an AI model that's kept on a local machine are much harder to read than those written by people. This is true across all four ways we measured it, and the results are very clear, with each difference showing a very low chance of happening by accident, less than 1 in 100 million. These findings hold up even when we use tests that don't assume a specific kind of data distribution.

The bigger meaning of these results is that making scientific writing easier to understand is a big problem that hasn't been solved yet — and it won't just fix itself because of how citations work, changes in the field, or just using AI tools by default. The group of scientists has a chance, and maybe even a responsibility, to make their research easier for the different groups of people they are meant to help. Understanding that progress will need the kind of clear and important changes in the system that the data here show are needed: not because writing in an easy way leads to more references, but because it's the correct way to do science in a world where knowledge is something we all share. Future studies should look at this analysis in more places, over longer time periods, and in different areas of study. They should also check how making advanced models easier to understand affects how easy texts are to read. Plus, they need to create better ways to measure both how clear ideas are and how complex the language is on the

surface. Until that work is completed and until the system that rewards scientific communication is changed, the difference between what scientists know and what the public understands will stay exactly as large as this study has shown.

References

Flesch, R. (1948). A new readability yardstick. *Journal of Applied Psychology*, 32(3), 221–233.

<https://doi.org/10.1037/h0057532>

Gunning, R. (1952). *The Technique of Clear Writing*.

Harry, G., & Laughlin, M. (1969). SMOG grading --a new readability formula.

https://oqg.osu.edu/media/documents/health_lit/WRRSMOG_Readability_Formula_G._Harry_McLaughlin_1969_.pdf

Kincaid, J. P., Fishburne, J., Rogers, R. L., & Chissom, B. S. (1975, February 1). Derivation of New Readability Formulas (Automated Readability Index, Fog Count and Flesch Reading Ease Formula) for Navy Enlisted Personnel. *Apps.dtic.mil*. <https://apps.dtic.mil/sti/citations/ADA006655>

Plavén-Sigray, P., Matheson, G. J., Schiffler, B. C., & Thompson, W. H. (2017). The readability of scientific texts is decreasing over time. *ELife*, 6, e27725. <https://doi.org/10.7554/eLife.27725>

Rakedzon, T., Segev, E., Chapnik, N., Yosef, R., & Baram-Tsabari, A. (2017). Automatic jargon identifier for scientists engaging with the public and science communication educators. *PLOS ONE*, 12(8), e0181742. <https://doi.org/10.1371/journal.pone.0181742>

Tenopir, C., & King, D. W. (2004). *Communication Patterns of Engineers*. John Wiley & Sons.

Touvron, H., Lavril, T., Izacard, G., Martinet, X., Lachaux, M.-A., Lacroix, T., Rozière, B., Goyal, N., Hambro, E., Azhar, F., Rodriguez, A., Joulin, A., Grave, E., & Lample, G. (2023). *LLaMA: Open and Efficient Foundation Language Models*. ArXiv (Cornell University). <https://doi.org/10.48550/arxiv.2302.13971>

Wan, X., & Liu, F. (2014). Are all literature citations equally important? Automatic citation strength estimation and its applications. *Journal of the Association for Information Science and Technology*, 65(9), 1929–1938. <https://doi.org/10.1002/asi.23083>