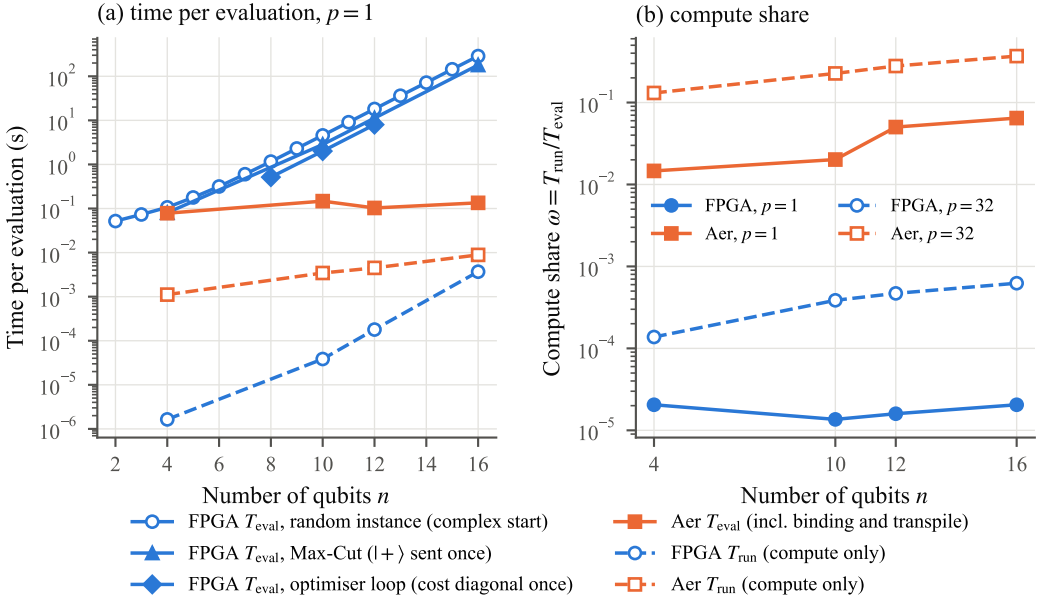
(a) time per evaluation, $p = 1$
(b) compute share
Time per evaluation (s)
Compute share $\omega = T_{\text{run}}/T_{\text{eval}}$
Number of qubits n
Number of qubits n
FPGA, $p = 1$
FPGA, $p = 32$
Aer, $p = 1$
Aer, $p = 32$
FPGA T_{eval}, random instance (complex start)
FPGA T_{eval}, Max-Cut ($|+\rangle$ sent once)
FPGA T_{eval}, optimiser loop (cost diagonal once)
Aer T_{eval} (incl. binding and transpile)
FPGA T_{run} (compute only)
Aer T_{run} (compute only)