


🔍 How can we help you today?

Articles in this section

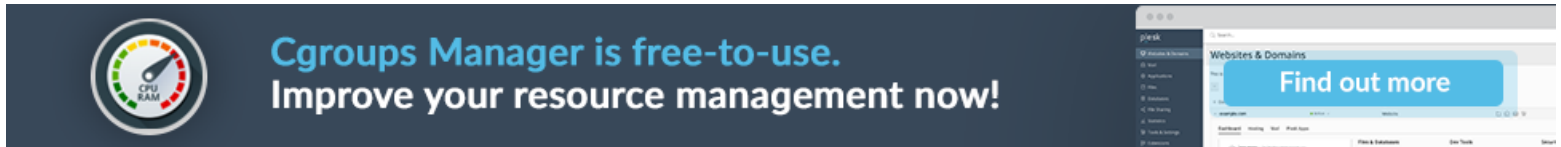

([https://servedbyadbutler.com/redirect.spark?](https://servedbyadbutler.com/redirect.spark?MID=178643&plid=1702135&setID=427883&channelID=0&CID=621168&banID=520588617&PID=0&textadID=0&tc=1&adSize=970x90&mt=1646899957530132&sw=153us%2Farticles%2F213403429-How-to-upgrade-MySQL-5.5-to-5.6-5.7-or-MariaDB-5.5-to-10.0-10.1-10.2-on-Linux-&hc=9a176424073349312a74348cd8c50c2a0cd99983&location=))

[MID=178643&plid=1702135&setID=427883&channelID=0&CID=621168&banID=520588617&PID=0&textadID=0&tc=1&adSize=970x90&mt=1646899957530132&sw=153us%2Farticles%2F213403429-How-to-upgrade-MySQL-5.5-to-5.6-5.7-or-MariaDB-5.5-to-10.0-10.1-10.2-on-Linux-&hc=9a176424073349312a74348cd8c50c2a0cd99983&location=\)](#)

How to upgrade MySQL 5.5 to 5.6/5.7 or MariaDB 5.5 to 10.x on Linux?



Anastasia Zyrianova (/hc/en-us/profiles/366514597820-Anastasia-Zyrianova)
Updated 4 hours ago

Follow (/hc/en-us/articles/213403429--How-to-upgrade-MySQL-5.5-to-5.6-5.7-or-MariaDB-5.5-to-10.x-on-Linux-/subscription.html)

Applicable to: Plesk for Linux

Question

How to upgrade MySQL 5.5 to 5.6/5.7 or MariaDB 5.5 to 10.X on Linux?

Answer

This article provides instructions for upgrading MySQL 5.5 to 5.6/5.7 and MariaDB 5.5 to 10.0/10.1/10.2/10.3/10.4/10.5 on Linux.

- ❗ **Note:** Upgrade can be performed in a command-line interface (<https://support.plesk.com/hc/en-us/articles/115000172834>) with the instructions below at your own risk. This task is supposed to be performed by a system administrator.

If you are not familiar with Linux system administering and would like our professionals to handle this task on your behalf, contact Professional Services team at <https://www.plesk.com/professional-services/> (<https://www.plesk.com/professional-services/>).

To find out your Linux distribution, run:

```
# plesk version | grep "OS version"
```

Or:

```
# cat /etc/*-release
```

Warning: MariaDB 10.4 and 10.5 are supported starting from Plesk Obsidian 18.0.30. Previous versions (Onyx and older) do not support MariaDB starting from 10.3 and there are no plans to implement it currently.

Warnings:

Direct upgrade from MySQL 5.1 to MySQL 5.6/5.7 will break tables structure. The instructions for upgrading MySQL from 5.1 to 5.5 on Linux are available here: [How to upgrade MySQL from 5.1 to 5.5 on Linux \(https://support.plesk.com/hc/en-us/articles/213367429\)](#)

It is strongly recommended to create a server snapshot (full backup) before upgrading. Perform MySQL upgrade at your own risk.

Before starting a MySQL upgrade, stop the WatchDog service if it is used on a server. Check its status with the `service watchdog status` command.

Note: MySQL will not be upgraded on CentOS/RHEL-based operating systems if it was installed from the Webtatic Yum repository:

```
# rpm -qa | grep -i mysql
mysql55w-server-5.5.57-1.w6.x86_64
```

To start an upgrade of MySQL/MariaDB, connect to a server via SSH (<https://support.plesk.com/hc/en-us/articles/115000172834>) as root/superuser and follow the instructions for your operating system:

Plesk on CentOS 8

Plesk on CentOS 7 / RHEL 7

By default, CentOS 7 is shipped with MariaDB 5.5. MariaDB 10.x version is a drop-in replacement for MySQL 5.5-5.7.

Automatic method

Note: The script will upgrade the default MariaDB 5.5 to the latest MariaDB version 10.5. Make sure Obsidian 18.0.30 or later is installed on the server.

1. Download the attached script and provide it with executable rights:

```
# wget https://support.plesk.com/hc/en-us/article_attachments/4584125667858/c7-mariadb-10.5-upgrade.sh && chmod +x c7-mariadb-10.5-upgrade.sh
```

2. Execute the script via CLI:

```
# ./c7-mariadb-10.5-upgrade.sh
```

Manual Method

1. For security reasons, create a database dump of all databases with the following command:

```
# MYSQL_PWD=`cat /etc/psa/.psa.shadow` mysqldump -u admin --verbose --all-databases --routines --triggers > /tmp/all-databases.sql
```

2. Stop MariaDB:

```
# service mariadb stop
```

3. Remove additional `mariadb-bench` package if installed:

```
# rpm -e --nodeps mariadb-bench
```

4. For security reasons, copy the database directory in a separate folder:

```
# cp -v -a /var/lib/mysql/ /var/lib/mysql_backup
```

5. Check if the `mysql-server` package is already installed:

```
# rpm -q --whatprovides mysql-server
```

If it is installed and the command above gives output, remove using the following command:

```
# rpm -e --nodeps `rpm -q --whatprovides mysql-server`
```

6. Configure MariaDB repository: open the Setting MariaDB repositories

(https://downloads.mariadb.org/mariadb/repositories/#mirror=mephi&distro=CentOS&distro_release=centos7-amd64--centos7) page, select your OS distro, release, and desired MariaDB version. Once done, the configuration that should be added to the `/etc/yum.repos.d/MariaDB.repo` file will appear.

Warning: MariaDB 10.4 and 10.5 are supported since 18.0.30, make sure the latest Plesk version is installed.

Here is an example for MariaDB 10.5:

6.1. Open/create the `MariaDB.repo` file in any text editor. In this example, we are using the `vi` editor (<https://support.plesk.com/hc/en-us/articles/360001084114>):

```
# vi /etc/yum.repos.d/MariaDB.repo
```

6.2. Add the content below to the file:

```
[mariadb]
name = MariaDB
baseurl = http://yum.mariadb.org/10.5/centos7-amd64
gpgkey = https://yum.mariadb.org/RPM-GPG-KEY-MariaDB
gpgcheck=1
```

6.3. Save the changes and close the file.

7. Reset all the cache:

```
# yum clean all
```

8. Start an upgrade of MariaDB:

```
# yum install MariaDB-client MariaDB-server MariaDB-compat MariaDB-shared
```

9. Once the upgrade is finished, start MariaDB:

```
# systemctl restart mariadb
```

OR

```
# systemctl restart mysql
```

10. Upgrade MySQL databases:

```
# MYSQL_PWD=`cat /etc/psa/.psa.shadow` mysql_upgrade -uadmin
```

11. Restart mysql service:

```
# systemctl restart mariadb
```

OR

```
# systemctl restart mysql
```

12. Execute this command to update the package version inside Plesk:

```
# plesk sbin packagemng -sdf
```

i Note: After an upgrade, there may appear 'mysql' init script. It should be removed to avoid conflicts with MariaDB service. The same commands can be used to fix already existing conflict:

```
# systemctl stop mysql; killall mysqld # to stop the incorrect service if it is started
# rm /etc/init.d/mysql && systemctl daemon-reload # to remove the incorrect service script and reload systemctl
configuration
# systemctl start mariadb # to start MariaDB if not started
# systemctl enable mariadb # to make sure that MariaDB will start after the server reboot automatically
```

Plesk on CloudLinux



Plesk on Debian 9



Plesk on Debian 10



Plesk on Ubuntu 18.04



Plesk on Ubuntu 20.04



More information available in MySQL documentation at <http://dev.mysql.com/> (<http://dev.mysql.com/doc/mysql-apt-repo-quick-guide/en/#repo-qg-apt-upgrading>).

 [c7-mariadb-10.5-upgrade.sh](#) (/hc/en-us/article_attachments/4584125667858/c7-mariadb-10.5-upgrade.sh)

1 KB · [Download](#) (/hc/en-us/article_attachments/4584125667858/c7-mariadb-10.5-upgrade.sh)



Was this article helpful?

✓

✗

Return to top ↗

Comments

215 comments

Sort by ▾

 Artur Beqiraj (/hc/en-us/profiles/114314410153-Artur-Beqiraj)
June 21, 2017 01:26

i have centos 7 end plesk Onyx end i need to have mariaDB 10.0.27 is possible ?
Is there any way to get this version?
thanks



(/hc/en-us/signin?return_to=us%2Farti0



(/hc/en-us/signin?return_to=us%2Farti



 Alexandr Tumanov
June 21, 2017 10:39

Hello @Artur Beqiraj
We recommend upgrading to MariaDB 10.1 at least. There is no significant difference, however, it will be easier to install MariaDB 10.1 or 10.2



(/hc/en-us/signin?return_to=us%2Farti0



(/hc/en-us/signin?return_to=us%2Farti



 Artur Beqiraj (/hc/en-us/profiles/114314410153-Artur-Beqiraj)
June 21, 2017 11:27

Hello Alexandr and thank you for your reply
But I have a soft who works only with mysql 5.6 or MariaDB 10.0.27
For this reason i am using the cpanel
But I'm not practical with it, Because I've always used plesk on my servers. Your article gives you the opportunity to upgrate but if I changed the url to
baseurl = http://yum.mariadb.org/10.2/centos7-amd64 (http://yum.mariadb.org/10.2/centos7-amd64) in /10.0.27/ run into errors
for this reason i ask you
thanks



(/hc/en-us/signin?return_to=us%2Farti0



(/hc/en-us/signin?return_to=us%2Farti



 Peter Jablonski (/hc/en-us/profiles/114324052713-Peter-Jablonski)
June 25, 2017 18:25 (Edited 5 years ago)

It didn't work for me in 100%.
I was upgrading MySQL 5.1 to 5.7 om my CentOS 6 and I couldn't start mysql.

```
# service mysqld start - gave me nothing, even no single line in /var/log/mysqld.log.
```

What I did:

1. I started mysql service from a file /usr/sbin/msqld to check what a problem was
2. The problem was in config file /etc/my.cnf

```
[ERROR] unknown variable 'innodb_additional_mem_pool_size=500K'
```

I had to comment this line.

3. After that I had a problem with access to the user table.

```
[ERROR] Fatal error: mysql.user table is damaged. Please run mysql_upgrade.
```

mysqld --skip-grant-tables - it starts without reading the user table

mysql_upgrade - then I could upgrade my tables

killall mysqld - killing all the mysql instances

4. Finally

```
# service mysqld start
```



Peter Debik (/hc/en-us/profiles/9266349285-Peter-Debik)

June 25, 2017 23:38

MariaDB 10.2 is not yet officially supported. It is not causing issues in the panel, but the database repair tool claims that some date/timestamp fields are misconfigured, and it is unable to repair them. It would be good to add a check in the installation routines of Plesk to prohibit an installation on MariaDB 10.2. I only "accidentally" installed it on a 10.2 and found out about the wrong version in a recent support ticket.



Artyom Baranov

June 30, 2017 16:52

@Peter Jablonski,

Direct upgrade of MySQL 5.1 to MySQL 5.6/5.7 will damage tables (There is the warning message at the top of this article).

It's strongly recommended to upgrade to MySQL 5.5 at first.



Definedhostinguk (/hc/en-us/profiles/114361191153-Definedhostinguk)

July 05, 2017 01:30

was upgrade from 5.5 to 5.7 on centos 6.9 and was getting **mysqld daemon failed to start** when trying to restart mysql. Trawled through the web and finally came to a really quick fix.

```
# mysqld_safe
```



Vitaly Zhidkov (/hc/en-us/profiles/5227400985-Vitaly-Zhidkov)

July 08, 2017 21:27

@Artur, in case you need some specific version of MariaDB, you can specify it in repository configuration file in baseurl. For 10.0.27 for CentOS 7 it will be <http://yum.mariadb.org/10.0.27/centos7-amd64> (<http://yum.mariadb.org/10.0.27/centos7-amd64>)



(/hc/en-us/signin?return_to=us%2Farti0



(/hc/en-us/signin?return_to=us%2Farti



Vitaly Zhidkov (/hc/en-us/profiles/5227400985-Vitaly-Zhidkov)

July 08, 2017 21:30

@Definedhostinguk this can be only a workaround, not a fix. Check the `/var/log/mysqld.log` for error messages and search for articles in our Help Center



(/hc/en-us/signin?return_to=us%2Farti0



(/hc/en-us/signin?return_to=us%2Farti



Bulat Tsydenov (/hc/en-us/profiles/5238808529-Bulat-Tsydenov)

July 19, 2017 03:20

@Peter It would be great if you provide your suggestion on our Plesk User Voice (<https://plesk.uservoice.com/forums/184549-feature-suggestions>). Thank you!



(/hc/en-us/signin?return_to=us%2Farti0



(/hc/en-us/signin?return_to=us%2Farti



Jonathan (/hc/en-us/profiles/114899323774-Jonathan)

September 07, 2017 00:48 (Edited 5 years ago)

I run CentOS Linux 7.3.1611 with Plesk Onyx v17.5.3_build1705170317.16. In Plesk I see there's a MySQL server running with 5.5.52-MariaDB, which I want to upgrade. But the command `service mariadb stop` returns *'mariadb' is not a command*. Furthermore, when I run `yum repolist` I don't see any mariadb or mysql at all. I'm quite new at this. What am I doing wrong?



(/hc/en-us/signin?return_to=us%2Farti0



(/hc/en-us/signin?return_to=us%2Farti



Bulat Tsydenov (/hc/en-us/profiles/5238808529-Bulat-Tsydenov)

September 07, 2017 03:17

@Jonathan instead of 'service mariadb stop' you can try to run 'systemctl stop mariadb.service'. As for 'yum repolist', as it is described in "For CentOS 7" section of this article, make sure you create `/etc/yum.repos.d/MariaDB10.1.repo` file with the corresponding content.

 Artur Beqiraj (/hc/en-us/profiles/114314410153-Artur-Beqiraj)
September 07, 2017 17:55

@Vitaly Zhidkov

i have specific it but dont work so does not successfully complete the installation

 Artyom Baranov
September 09, 2017 02:49

@Artur Beqiraj,

I have checked your previous post carefully and found that you are trying to install MariaDB 10.0.27 from the repository on MariaDB 10.2:

```
baseurl = http://yum.mariadb.org/10.2/centos7-amd64 (http://yum.mariadb.org/10.2/centos7-amd64)
```

Try to use the following link for baseurl instead:

```
baseurl = http://yum.mariadb.org/10.0.27/centos7-amd64
```

 Artur Beqiraj (/hc/en-us/profiles/114314410153-Artur-Beqiraj)
September 13, 2017 13:34

Artyom Baranov (/hc/en-us/profiles/7204214549-Artyom-Baranov)

i have specific but has in this error after instalation

Transaction check error:

- file `/etc/init.d/mysql` conflicts between attempted installs of MariaDB-server-10.0.27-1.el7.centos.x86_64 and MariaDB-Galera-server-10.0.27-1.el7.centos.x86_64
- file `/etc/my.cnf.d/server.cnf` conflicts between attempted installs of MariaDB-server-10.0.27-1.el7.centos.x86_64 and MariaDB-Galera-server-10.0.27-1.el7.centos.x86_64
- file `/usr/bin/aria_chk` conflicts between attempted installs of MariaDB-server-10.0.27-1.el7.centos.x86_64 and MariaDB-Galera-server-10.0.27-1.el7.centos.x86_64
- file `/usr/bin/aria_dump_log` conflicts between attempted installs of MariaDB-server-10.0.27-1.el7.centos.x86_64 and MariaDB-Galera-server-10.0.27-1.el7.centos.x86_64
- file `/usr/bin/aria_ftdump` conflicts between attempted installs of MariaDB-server-10.0.27-1.el7.centos.x86_64 and MariaDB-Galera-server-10.0.27-1.el7.centos.x86_64
- file `/usr/bin/aria_pack` conflicts between attempted installs of MariaDB-server-10.0.27-1.el7.centos.x86_64 and MariaDB-Galera-server-10.0.27-1.el7.centos.x86_64
- file `/usr/bin/aria_read_log` conflicts between attempted installs of MariaDB-server-10.0.27-1.el7.centos.x86_64 and MariaDB-Galera-server-10.0.27-1.el7.centos.x86_64
- file `/usr/bin/innochecksum` conflicts between attempted installs of MariaDB-server-10.0.27-1.el7.centos.x86_64 and MariaDB-Galera-server-10.0.27-1.el7.centos.x86_64
- file `/usr/bin/my_print_defaults` conflicts between attempted installs of MariaDB-server-10.0.27-1.el7.centos.x86_64 and MariaDB-Galera-server-10.0.27-1.el7.centos.x86_64

file /usr/bin/myisam_ftdump conflicts between attempted installs of MariaDB-server-10.0.27-1.el7.centos.x86_64 and MariaDB-Galera-server-10.0.27-1.el7.centos.x86_64

file /usr/bin/myisamchk conflicts between attempted installs of MariaDB-server-10.0.27-1.el7.centos.x86_64 and MariaDB-Galera-server-10.0.27-1.el7.centos.x86_64

file /usr/bin/myisamlog conflicts between attempted installs of MariaDB-server-10.0.27-1.el7.centos.x86_64 and MariaDB-Galera-server-10.0.27-1.el7.centos.x86_64

file /usr/bin/myisampack conflicts between attempted installs of MariaDB-server-10.0.27-1.el7.centos.x86_64 and MariaDB-Galera-server-10.0.27-1.el7.centos.x86_64

file /usr/bin/mysql_tzinfo_to_sql conflicts between attempted installs of MariaDB-server-10.0.27-1.el7.centos.x86_64 and MariaDB-Galera-server-10.0.27-1.el7.centos.x86_64

file /usr/bin/mysql_upgrade conflicts between attempted installs of MariaDB-server-10.0.27-1.el7.centos.x86_64 and MariaDB-Galera-server-10.0.27-1.el7.centos.x86_64

file /usr/bin/mysqlbug conflicts between attempted installs of MariaDB-server-10.0.27-1.el7.centos.x86_64 and MariaDB-Galera-server-10.0.27-1.el7.centos.x86_64

 Artyom Baranov
October 06, 2017 23:57

Artur Beqiraj@

Hello! Such issue may appear if you have enabled additional repository from which MariaDB can be installed.

Or, MariaDB has already been installed from another repository which conflicts with the one provided earlier.

If my first suggestion is correct, just disable that additional repository.

If the second suggestion is correct, I recommend contacting our Professional Service (<https://www.plesk.com/help-center/professional-services>).

 Keith Arnold (/hc/en-us/profiles/115237149013-Keith-Arnold)
October 10, 2017 12:41 (Edited 4 years ago)

Hi,

I've just followed the instructions for upgrading on Centos 6 and all appeared to go ok.

But then some of the tables started showing the following error:

Native table 'performance_schema'. 'session_variables' has the wrong structure

A quick Google later and it appears I needed to have done

service mysqld restart

after the mysql_upgrade. I now don't appear to have the 'wrong structure' errors anymore.

 Konstantin Annikov
October 10, 2017 21:52

@Keith,

Thank you for the input. I have added this information to article.

 Richard Mountain (/hc/en-us/profiles/115949456033-Richard-Mountain)
December 06, 2017 18:35

I've followed the Centos 6 guide, everything seem to install but it's still running MySql 5.5.57

I've tried service mysqld restart

But this doesn't seem to do anything.


(/hc/en-us/signin?return_to=us%2Farti0


(/hc/en-us/signin?return_to=us%2Farti




(/hc/en-us/signin?return_to=us%2Farti0


(/hc/en-us/signin?return_to=us%2Farti




(/hc/en-us/signin?return_to=us%2Farti0


(/hc/en-us/signin?return_to=us%2Farti





Artyom Baranov
December 09, 2017 01:56

@Richard Mountain,

Hello! Please provide me with the output of the following commands:

```
# plesk version  
  
# mysql -V
```



Thomas Friedrich (/hc/en-us/profiles/360884029914-Thomas-Friedrich)
March 06, 2018 18:48

With Ubuntu 14.04 I had to restart mysql before step 7 worked.



Robert Asilbekov (/hc/en-us/profiles/7222639945-Robert-Asilbekov)
March 10, 2018 15:26

@Thomas Friedrich

Thank you for the feedback. The article was updated.



Louis-Philippe Frenette (/hc/en-us/profiles/361061639534-Louis-Philippe-Frenette)
March 15, 2018 18:41

For those like me who installed mysql from the webtatic repo here's the workaround to upgrade to 5.6 or 5.7 on Centos 6:

instead of

[\(/hc/en-us/signin?return_to=us%2Farti0\)](/hc/en-us/signin?return_to=us%2Farti0)

[\(/hc/en-us/signin?return_to=us%2Farti0\)](/hc/en-us/signin?return_to=us%2Farti0)

[\(/hc/en-us/signin?return_to=us%2Farti0\)](/hc/en-us/signin?return_to=us%2Farti0)

[\(/hc/en-us/signin?return_to=us%2Farti0\)](/hc/en-us/signin?return_to=us%2Farti0)

[\(/hc/en-us/signin?return_to=us%2Farti0\)](/hc/en-us/signin?return_to=us%2Farti0)

[\(/hc/en-us/signin?return_to=us%2Farti0\)](/hc/en-us/signin?return_to=us%2Farti0)

[\(/hc/en-us/signin?return_to=us%2Farti0\)](/hc/en-us/signin?return_to=us%2Farti0)

[\(/hc/en-us/signin?return_to=us%2Farti0\)](/hc/en-us/signin?return_to=us%2Farti0)

```
# yum update mysql
```

write the following:

```
# yum replace mysql55w --replace-with=mysql-community-client mysql55w-libs --replace-with=mysql-community-libs
mysql55w-server --replace-with=mysql-community-server
```



Ivan Postnikov (/hc/en-us/profiles/10828154765-Ivan-Postnikov)
March 17, 2018 01:52

@Louis-Philippe Frenette

Thank you for sharing the workaround.
It may be useful to another Pleskians.



Stefan (/hc/en-us/profiles/362177501374-Stefan)
May 01, 2018 13:44

Thank you for the guide, I sucessfully updated mysql 5.1 to mysql 5.6 on centos 6 with plesk 17.5.3.
Now, how do I upgrade / replace this mysql 5.6 to maria db 10.1?



Alexander Hammer (/hc/en-us/profiles/362201851373-Alexander-Hammer)
May 02, 2018 15:57

I have CentOS 7 and Plesk 17.5 and want to upgrade from MaraiaDB 5.5 to 10.1. On my local server (without plesk) I had to run the " mysql_upgrade " command. Do I have to do this on my server with plesk as well?



Ivan Postnikov (/hc/en-us/profiles/10828154765-Ivan-Postnikov)
May 05, 2018 20:26

Hello @Alexander! Usually, it is not required.



(/hc/en-us/signin?return_to=us%2Farti0



(/hc/en-us/signin?return_to=us%2Farti



(/hc/en-us/signin?return_to=us%2Farti0



(/hc/en-us/signin?return_to=us%2Farti



(/hc/en-us/signin?return_to=us%2Farti0



(/hc/en-us/signin?return_to=us%2Farti




(/hc/en-us/signin?return_to=us%2Farti0




(/hc/en-us/signin?return_to=us%2Farti






Dear Ivan, I can answer my own question. When checking the status of the MariaDB service, there where an error message regarding the innodb table(s). After I ran "mysql_upgrade " command the error was gone.



@Alexander, thank you for letting us know your experience!



@Stefan, use the instruction from this ([/hc/en-us/articles/115003113653-How-to-switch-database-server-from-MySQL-to-MariaDB-on-CentOS](https://howtoper.com/en-us/articles/115003113653-How-to-switch-database-server-from-MySQL-to-MariaDB-on-CentOS)) article.

Please note that it is highly recommended to create a full server backup before applying resolution steps.

The solution is applied on your own risk.

Recently viewed articles

How to log in to Plesk? (/hc/en-us/articles/213413369-How-to-log-in-to-Plesk-)

Related articles

[How to upgrade MySQL from 5.1 to 5.5 on Plesk for Linux? \(/hc/en-us/related/click?\)](#)

data=BAh7CjcbZGVzdGluYXRyb25fYXJ0aWNSZV9pZGkEhbq3DDoYcmVmZXJyZXJfYXJ0aWNSZV9pZGkEJUE4DDoLbG9jYWxlSSIKZW4tdXMGOgZFVDoldJxSSJaL2hjL2VuLXVzL2FydGlibGVzLzlxMzI
-78c99d049f0414fc39820cef0bcd4b7f781e73ed)

How to back up all MySQL databases via a command-line interface in Plesk for Linux (/hc/en-us/related/click?)

data=BAh7CjcbZGVzdGluYXRyb25fYXJ0aWNsZV9pZGwrCE54NFTADoYcmVmZXJyZXJfYXJ0aWNsZV9pZGkEJUE4DDoLbG9jYWxlSSlKZW4tdXMGOGZFVDoldXJsSSJ3L2hjL2VuLXVzL2FydGlibGVzL2-184edbfb90a4cef51c436357baf28437e4551b906)

After successful MySQL upgrade, the old version of database server is shown in Plesk interface ([/hc/en-us/related/click?](/hc/en-us/related/click?source=sidebar)

data=BAH7CjobZGVzdGluYXRpb25fYXJ0aWNSZV9pZGkE0U%2B4DDoYcmVmZXJyZXJfYXJ0aWNSZV9pZGkEJUE4DDoLbG9jYWxlSSIKZW4tdXMGOgZFVDoldXsSSIBey9oYy9lbi11cy9hcnRpY2xlcy8y
-dd54905a3de03097f4606ab88c9a26f0c226c00d)

How to enable remote access to MySQL server in Plesk? (/hc/en-us/related/click?)

data=BAh7CjcbZGVzdGluYXRyb25fYXJ0aWNsZV9pZGkE7eu%2FDDoYcmVmZXJyZXJfYXJ0aWNsZV9pZGkEUe4DDoLbG9jYWxlSSIKZW4tdXMGOgZFVDoldXSJSXL2hjL2VuLVxzL2FydGljbGVzLzlzLWU6bG9ja3Rlc2VudDQ7MTI2b24e3f40bbe1916d459)

	COMPANY	PRODUCT	KNOWLEDGE BASE	PROGRAMS	COMMUNITY
	About Plesk (https://www.plesk.com/)	Pricing (https://www.plesk.com/pricing/)	Documentation (https://docs.plesk.com/)	Content Program (https://www.plesk.com/content-program/)	Blog (https://www.plesk.com/blog/)
Follow us:	us)	Extensions (https://www.plesk.com/extensions/)	Help Center (/hc/en-us)	Partner Program (https://www.plesk.com/partner-program/)	Forums (https://talk.plesk.com/)
	(https://www.facebook.com/Plesk/)	Our Brand (https://www.plesk.com/brand/)	Migrate to Plesk (https://www.plesk.com/products/migrate-to-plesk/)	Professional (https://www.plesk.com/professional/)	Plesk University (https://www.plesk.com/university/)
	(https://twitter.com/Plesk)	Legal (https://www.plesk.com/legal/)	services)		
	(https://www.linkedin.com/company/plesk/)	Privacy Policy (https://www.plesk.com/privacy-policy/)	Contact Us (https://www.plesk.com/contact-us/)		
	(https://www.youtube.com/channel/UCeU-6YHGQFcVSHLbEXLNIA)	Impressum (https://www.plesk.com/impressum/)	Plesk Lifecycle Policy (https://www.plesk.com/lifecycle-policy/)		
	(https://github.com/plesk)				