



Postgres deployment

This time, we will not use the command line but the OpenShift web console to deploy an instance of Postgres. Start by opening the Web interface:

Red Hat OpenShift Container Platform

Project: All Projects

Developer ← select the developer view

+Add

Topology

Observe

Search

Builds

Helm


Add

Select a Project to start adding to it or [create a Project](#). ← click here


Name Search by name...

Name	Display name	Status
PR airflow	No display name	✓ Active
PR calico-system	No display name	✓ Active


Now, create a new project:

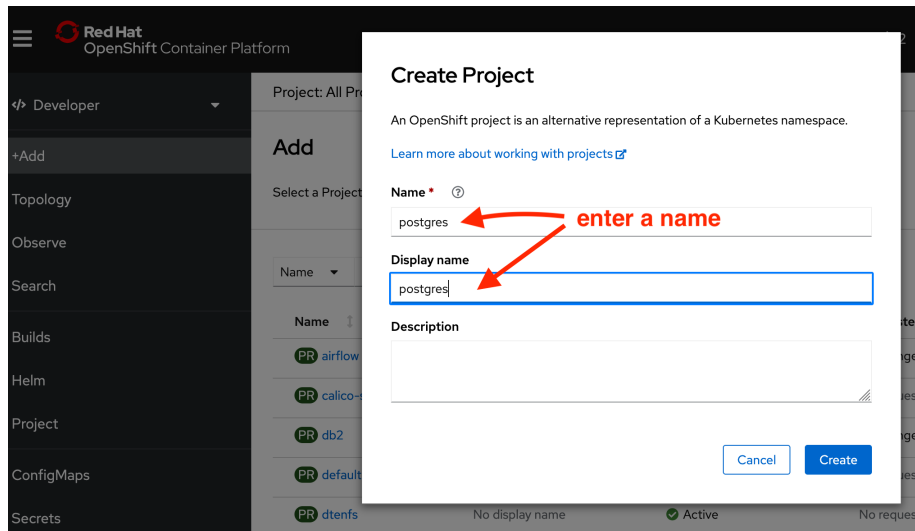

For the next step, ensure that you are in the newly created project and add a database deployment template:

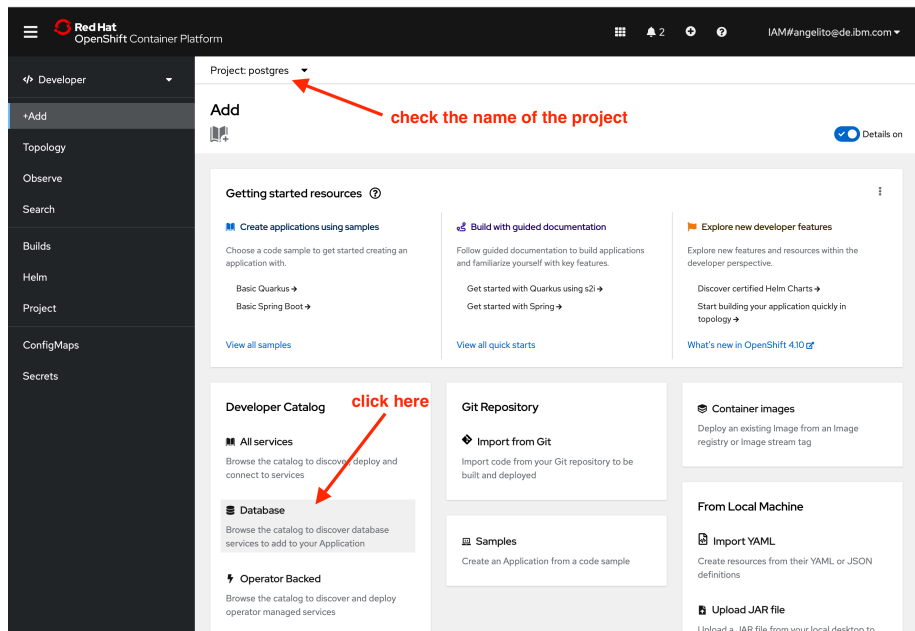

Select the PostgreSQL template:

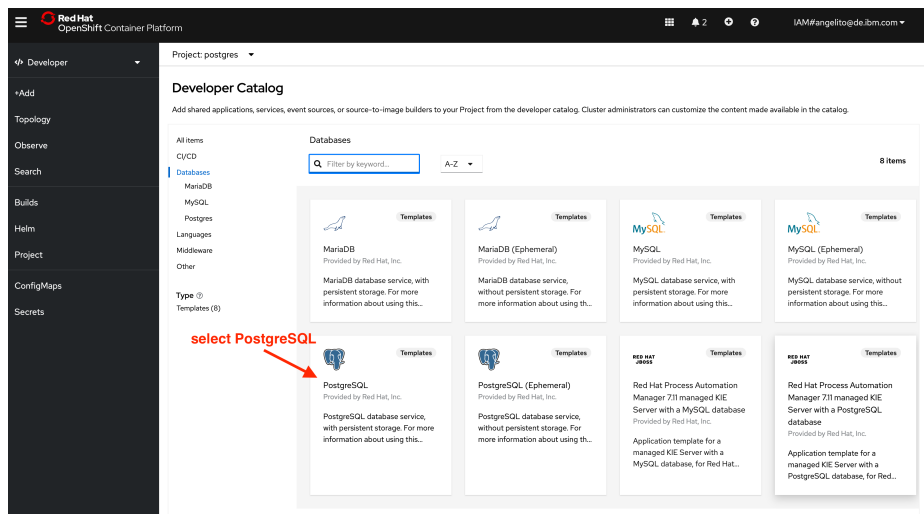

Provider	Description
Red Hat, Inc.	
Created at	PostgreSQL database service, with persistent storage. For more information about using this template, including OpenShift considerations, see https://github.com/sclorg/postgresql-container/ .
Support	NOTE: Scaling to more than one replica is not supported. You must have persistent volumes available in your cluster to use this template.
Documentation	

In the next panel, you just need to enter a user and the password. Leave the rest fields as default:

Red Hat OpenShift Container Platform

Developer

- +Add
- Topology
- Observe
- Search
- Builds
- Helm
- Project
- ConfigMaps
- Secrets

Instantiate Template

Namespace *
 postgres

Memory Limit *
 512Mi
 Maximum amount of memory the container can use.

Namespace
 openshift
 The OpenShift Namespace where the ImageStream resides.

Database Service Name *
 postgresql
 The name of the OpenShift Service exposed for the database.

PostgreSQL Connection Username
 postgres
 Username for PostgreSQL user that will be used for accessing the database.

PostgreSQL Connection Password
 postgres
 Password for the PostgreSQL connection user.

PostgreSQL Database Name *
 sampledb
 Name of the PostgreSQL database accessed.

Volume Capacity *
 1Gi
 Volume space available for data, e.g. 512Mi, 2Gi.

Version of PostgreSQL Image *
 10-e18
 Version of PostgreSQL image to be used (10-e17, 10-e18, or latest).

Create **Cancel**

PostgreSQL
 DATABASE: POSTGRESQL
 • View documentation
 • Get support
 PostgreSQL database service, with per considerations, see https://github.com
 NOTE: Scaling to more than one replica template.
 The following resources will be created:
 • DeploymentConfig
 • PersistentVolumeClaim
 • Secret
 • Service

After a few minutes, you can check if the deployment succeeded by inspecting the pods

```
# Replace the command with your own one inside the single quotes and run the cell
# Example OC_LOGIN_COMMAND='oc login --token=sha256~3bR5KXgwiUoaQiph2_kIXCDQnVfm_HQy3YwU2m-t
OC_LOGIN_COMMAND='_replace_this_string_by_pasting_the_clipboard_'
$OC_LOGIN_COMMAND
```

```
# Check if there is one pod running and another one completed
oc project postgres
oc get pods
```

Check if there is one service defined for postgres

```
# Look for a service. The default name will be postgresql and the port 5432
oc get services
```

In case you want to access the Postgres database with a GUI like DBeaver, SquiereL SQL or an external python program, it is necessary to externalize the

service port:

```
servicename=$(oc get services | grep postgresql | awk '{print $1}')
oc expose svc $servicename --type=NodePort --generator="service/v2" --name=pg-nodeport
```

If everything went well, you will see two services. The port 5432 is the default postgres and it is accessible inside the cluster. The NodePort entry will map 5432 to another one (the number attached right to the colon) and can be used by applications hosted outside OpenShift.

Two services will be displayed:

```
oc expose svc pg-nodeport
oc get services
```

And the address of the host can be retrieved by querying the routes:

This is the host name of Postgres to access it from outside the cluster

```
oc get routes
```

Finally, you can verify if you can connect to the default database and insert data:

```
podname=$(oc get pods --field-selector=status.phase=Running -o custom-columns=POD:.metadata.name)
oc rsh $podname psql --version
oc rsh $podname psql -c '\l'
oc rsh $podname psql -c 'create table test(c1 integer, c2 char(1));'
oc rsh $podname psql -c "insert into test values(1,'a')"
oc rsh $podname psql -c 'select * from test'
```

Previous Section: DataStage deployment

Return to main