

Introduction to Software Testing *(2nd edition)* **Chapter 5**

Criteria-Based Test Design

Paul Ammann & Jeff Offutt


<http://www.cs.gmu.edu/~offutt/softwaretest/>

20 September 2015

Changing Notions of Testing

- Old view focused on testing at each software development **phase** as being very different from other phases
 - Unit, module, integration, system ...
- New view is in terms of **structures** and **criteria**
 - input space, graphs, logical expressions, syntax
- **Test design** is largely the same at each phase
 - Creating the **model** is different
 - Choosing **values** and **automating** the tests is different

Model-Driven Test Design

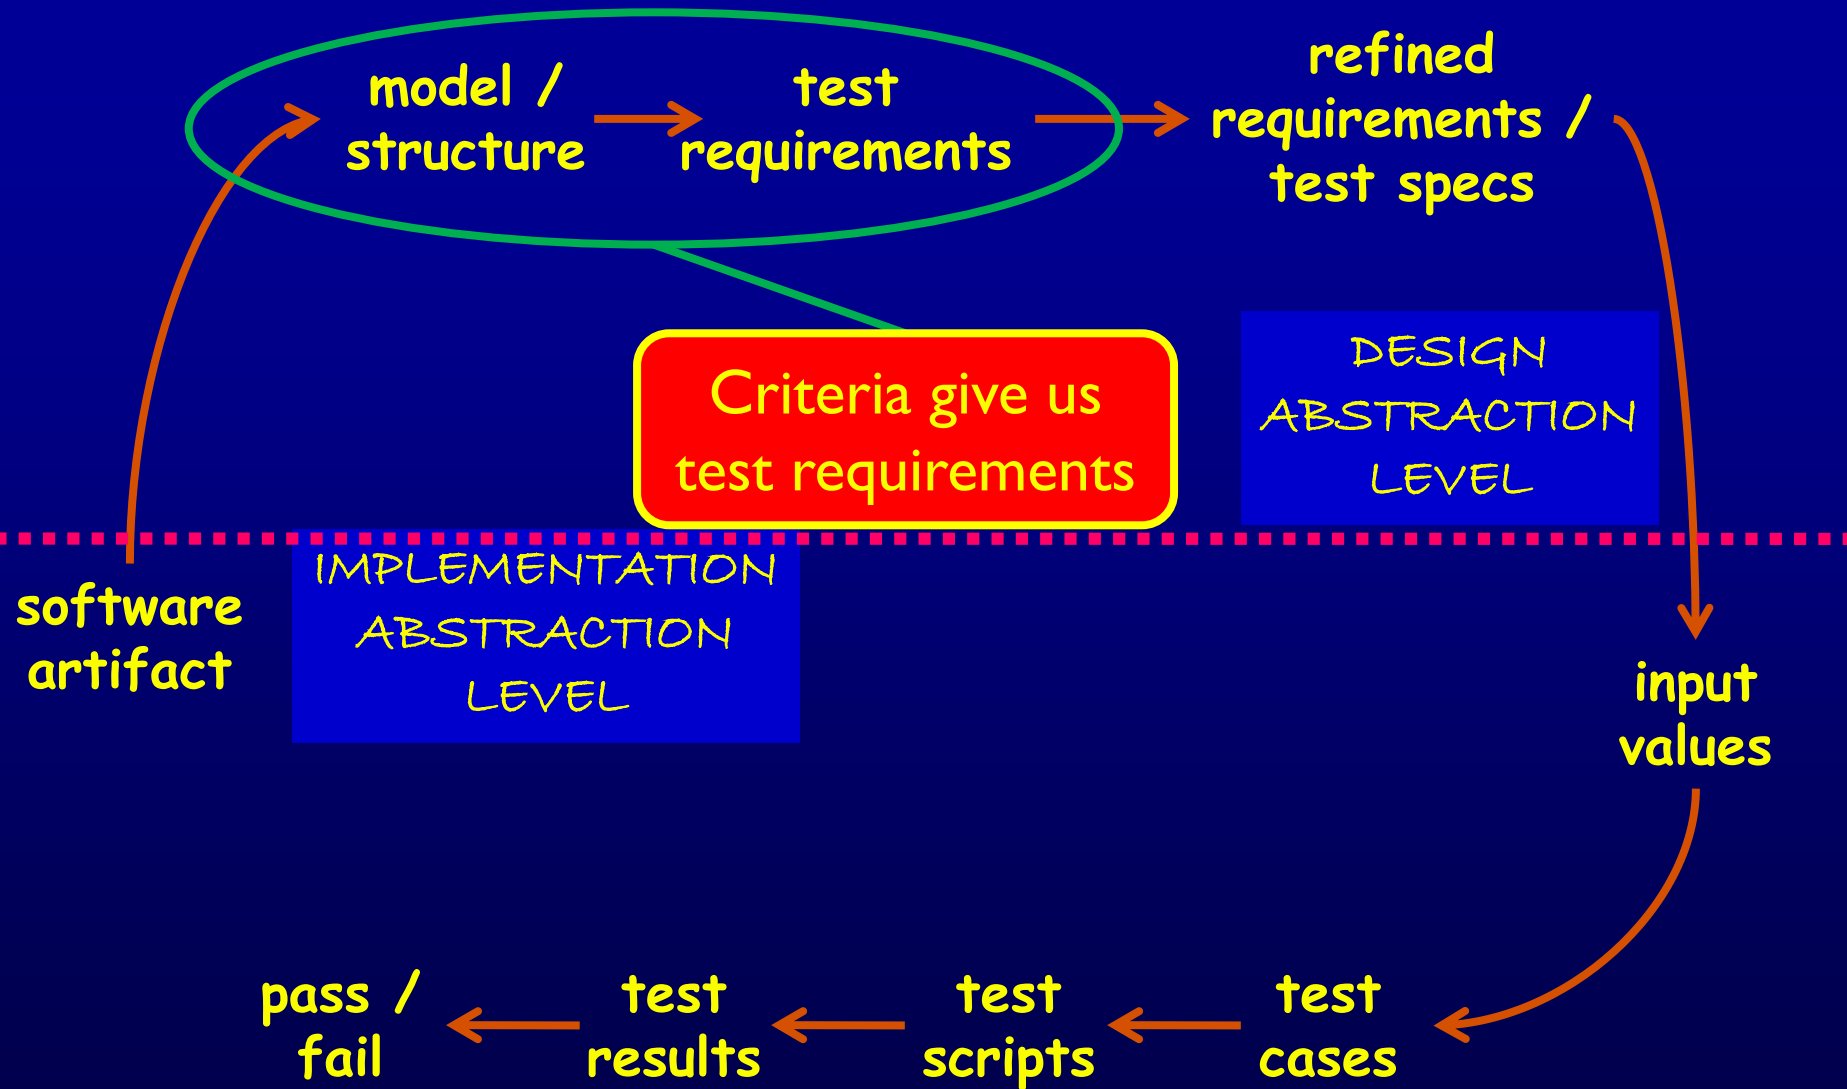

New : Test Coverage Criteria

A tester's job is **simple** : Define a model of the software, then find ways to cover it

- **Test Requirements** : A specific element of a software artifact that a test case must satisfy or cover
- **Coverage Criterion** : A rule or collection of rules that impose test requirements on a test set

Example : Jelly Bean Coverage

Flavors :

1. Lemon
2. Pistachio
3. Cantaloupe
4. Pear
5. Tangerine
6. Apricot



Colors :

1. Yellow (Lemon, Apricot)
2. Green (Pistachio)
3. Orange (Cantaloupe, Tangerine)
4. White (Pear)

■ Possible coverage criteria :

1. Taste one jelly bean of **each flavor**
 - Deciding if yellow jelly bean is Lemon or Apricot is a controllability problem
2. Taste one jelly bean of **each color**

Test Coverage Criteria

Testing researchers have defined dozens of criteria, but they are all really just a few criteria on four types of structures ...


Criteria Based on Structures

Structures : Four ways to model software

1. Input Domain
Characterization
(sets)

A: {0, 1, >1}
B: {600, 700, 800}
C: {swe, cs, isa, ifs}

2. Graphs



3. Logical Expressions

(not X or not Y) and A and B

4. Syntactic Structures
(grammars)

```
if (x > y)
    z = x - y;
else
    z = 2 * x;
```

1. Input Domain Characterization

■ Describe the **input domain** of the software


- Identify input parameters
- Partition each input into finite sets of representative values
- Choose combinations of values

■ Example

- Parameters $F(\text{int } X, \text{int } Y)$
- Possible values $X: \{ <0, 0, 1, 2, >2 \}, Y: \{ 10, 20, 30 \}$
- Tests
 - $F(-5, 10), F(0, 20), F(1, 30), F(2, 10), F(5, 20)$

2. Graph Coverage

to test all nodes: num path = 2 = num reqsto test all edges: num path = 2 = num reqsto

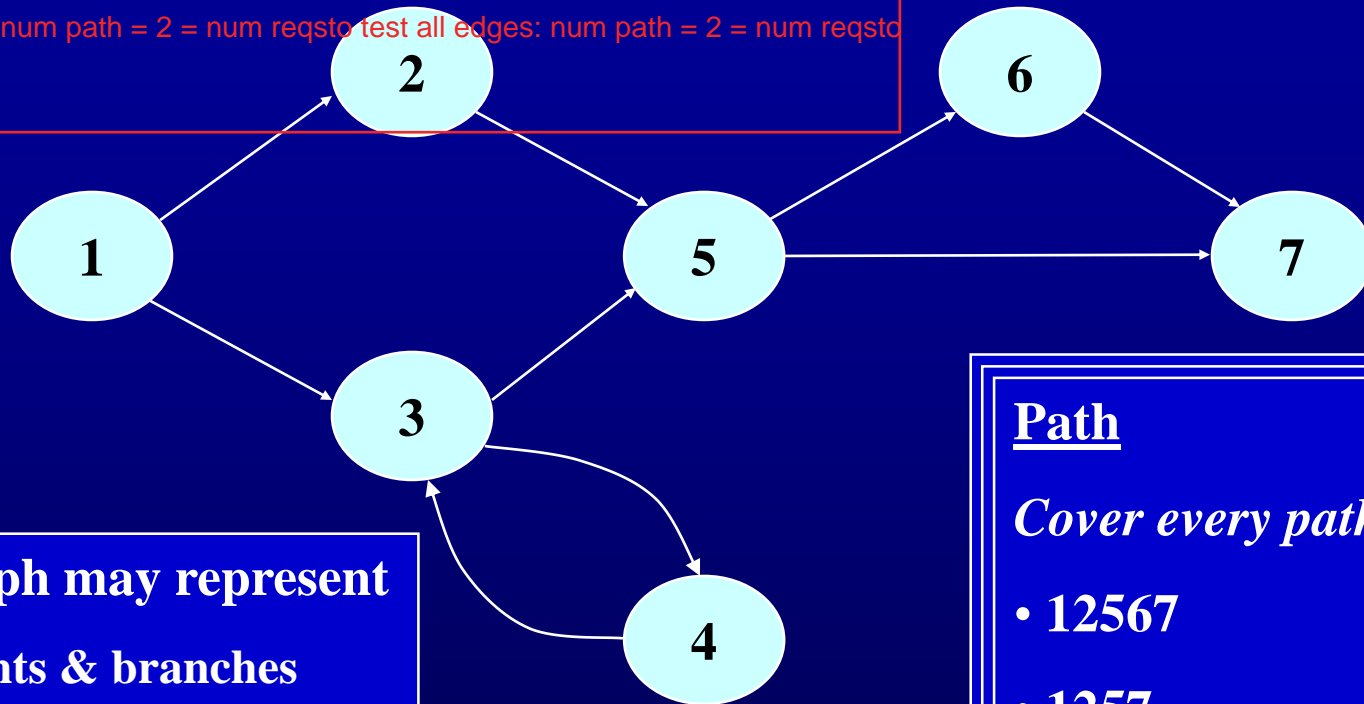

This graph may represent

- statements & branches
- methods & calls
- states and transitions

•
•
•

Path

Cover every path

- 12567
- 1257
- 13567
- 1357
- 1343567
- 134357 ...

3. Logical Expressions

$((a > b) \text{ or } G) \text{ and } (x < y)$

num clauses = 3 If each clause must be tested with one False and one True values: num of requiremen

Transitions

Program Decision Statements

Software Specifications

Logical
Expressions

3. Logical Expressions

$((a > b) \text{ or } G) \text{ and } (x < y)$

■ Example:

■ Predicate Coverage : Each predicate must be true and false

– $((a > b) \text{ or } G) \text{ and } (x < y) = \text{True, False}$

■ Clause Coverage : Each clause must be true and false

– $(a > b) = \text{True, False}$

– $G = \text{True, False}$

– $(x < y) = \text{True, False}$

4. Syntactic Structures

- Based on a grammar, or other syntactic definition
- Primary example is mutation testing
 1. Induce **small changes** to the program: mutants
 2. Find **tests** that cause the mutant programs to fail: killing mutants
 3. Killing mutants is defined as different output from the original program
- In practice, if the software contains a fault, there will usually be a set of mutants that can only be killed by a test case that also detects that fault
- Example program and mutants

```
if (x > y)
    z = x - y;
else
    z = 2 * x;
```

```
if (x > y)
    Δif (x >= y)
        z = x - y;
else
    z = 2 * x;
```

Coverage

Given a set of test requirements TR for coverage criterion C , a test set T satisfies C coverage if and only if for every test requirement tr in TR , there is at least one test t in T such that t satisfies tr

- **Infeasible test requirements** : test requirements that cannot be satisfied
 - No test case values exist that meet the test requirements
 - Example: Dead code
 - Detection of infeasible test requirements is formally undecidable for most test criteria
- Thus, 100% coverage is **impossible** in practice

More Jelly Beans

T1 = { three Lemons, one Pistachio, two Cantaloupes, one Pear, one Tangerine, four Apricots }

- Does test set T1 satisfy the **flavor criterion** ? ✓

T2 = { One Lemon, two Pistachios, one Pear, three Tangerines }

- Does test set T2 satisfy the **flavor criterion** ? ✗ $c = 4 / 6 = 66\%$
- Does test set T2 satisfy the **color criterion** ? ✓

Coverage Level

The ratio of the number of test requirements satisfied by T to the size of TR

- T2 on the previous slide satisfies 4 of 6 test requirements

Comparing Criteria with Subsumption (5.2)

- **Criteria Subsumption** : A test criterion $C1$ subsumes $C2$ if and only if every set of test cases that satisfies criterion $C1$ also satisfies $C2$
- Must be true for **every set** of test cases
- **Examples** :
 - The flavor criterion on jelly beans subsumes the color criterion ... if we taste every flavor we taste one of every color
 - If a test set has covered every branch in a program (satisfied the branch criterion), then the test set is guaranteed to also have covered every statement

ex: Nodes cannot subsume edges.

Advantages of Criteria-Based Test Design (5.3)

- Criteria maximize the “bang for the buck”
 - Fewer tests that are more effective at finding faults
- Comprehensive test set with minimal overlap
- Traceability from software artifacts to tests
 - The “why” for each test is answered
 - Built-in support for regression testing
- A “stopping rule” for testing—advance knowledge of how many tests are needed
- Natural to automate

Criteria Summary

- Many companies still use “monkey testing”
 - A human sits at the keyboard, wiggles the mouse and bangs the keyboard
 - No automation
 - Minimal training required
- Some companies automate human-designed tests
- But companies that use both automation and criteria-based testing

Save money

Find more faults

Build better software

Structures for Criteria-Based Testing

