

Philipps-Universität Marburg  
Fachbereich Mathematik und Informatik  
AG Softwaretechnik

**Analysis of Conflicts and Dependencies between User  
Stories using Graph Transformation**

**Masterarbeit**  
zur Erlangung des akademischen Grades  
Master of Science

vorgelegt von  
**Amir Rabieyan Nejad**  
Matrikel-Nr: 3350269

24. Juni 2024



## Selbstständigkeitserklärung

Hiermit versichere ich, Amir Rabieyan Nejad, dass ich die vorliegende Arbeit mit dem Titel *Analysis of Conflicts and Dependencies between User Stories using Graph Transformation* selbstständig verfasst und keine anderen als die angegebenen Quellen und Hilfsmittel benutzt habe. Die Masterarbeit wurde in der jetzigen oder ähnlichen Form noch bei keiner anderen Hochschule eingereicht und hat noch keinen anderen Prüfungszwecken gedient.

A handwritten signature in blue ink, appearing to read 'Rabieyan' followed by a stylized flourish.

Marburg, den 24. Juni 2024



## Abstract

*User stories*, the basic building blocks of software development, serve as precise and testable descriptions of a software's functionality. Within the dynamic framework of *agile development*, these user stories are usually written informally in simple text and managed in the product backlog, which serves as a repository for prioritising and tracking development tasks.

*Behaviour Driven Development* (BDD), a special approach in the field of agile software development, places a strong emphasis on the iterative implementation of user stories. The sequence of user stories in BDD is a central aspect of the methodology. The correct sequence not only has an impact on the efficiency of development, but also on the overall success of the project. By effectively prioritising and sequencing user stories, development teams can deliver incremental value to users, respond to changing requirements and ensure that the most critical features are addressed first.

User stories often have dependencies on each other, leading to potential conflicts if one user story requires the deletion of a component that is essential for the successful execution of another user story, or if one user story introduces an element that runs counter to the realisation of another user story and thus prevents it. In addition, changing an existing requirement or adding a new requirement to the existing *product backlog* in agile software development can also cause conflicts due to changes in the needs and concerns of *system stakeholders*. This can result in a wide range of inconsistencies due to conflicting requirements, as requirements are raised by multiple stakeholders involved in product development to achieve different functions.

Normally, to minimise the occurrence of conflicts, teams should systematically identify and document dependencies between user stories within their backlog. Agile methods such as *Scrum* encourage cross-functional collaboration and daily stand-up meetings as mechanisms to address and mitigate dependencies and conflicts in a timely manner. However, this approach can be time and resource consuming. In cases where the backlog is very extensive, recognising existing conflicts between user stories can become a complex undertaking.

*Model-based software engineering* is a suitable method for coping with the ever-increasing complexity of software development processes. *Graphs* and *graph transformations* have proven to be useful for visualising such models and their changes.

Since there is no process in agile software development to systematically identify and manage conflicts between requirements created in natural language, this thesis aims to present a well-structured workflow that uses a collection of techniques and tools from different domains to accelerate the automatic detection of conflicts and dependencies in natural language user stories.

## Zusammenfassung

*User Stories*, die Grundbausteine der Softwareentwicklung, dienen als präzise und testbare Beschreibungen der Funktionalität einer Software. Innerhalb des dynamischen

Rahmens der *agilen Entwicklung* werden diese User Stories in der Regel informell in einfachem Text verfasst und im *Product Backlog* verwaltet, das als Repository für die Priorisierung und Verfolgung von Entwicklungsaufgaben dient.

*Behaviour Driven Development* (BDD), ein spezieller Ansatz im Bereich der agilen Softwareentwicklung, legt einen starken Schwerpunkt auf die iterative Umsetzung von User Stories. Die Reihenfolge der User Stories im BDD ist ein zentraler Aspekt der Methodik. Die richtige Reihenfolge hat nicht nur Auswirkungen auf die Effizienz der Entwicklung, sondern auch auf den Gesamterfolg des Projekts. Durch eine effektive Priorisierung und Abfolge der User Stories können die Entwicklungsteams den Benutzern einen inkrementellen Mehrwert bieten, auf sich ändernde Anforderungen reagieren und sicherstellen, dass die kritischsten Funktionen zuerst behandelt werden.

User Stories sind oft voneinander abhängig, was zu potenziellen Konflikten führen könnte, wenn eine User Story die Löschung einer Komponente erfordert, die für die erfolgreiche Ausführung einer anderen User Story unerlässlich ist, oder wenn eine User Story ein Element einführt, das der Realisierung einer anderen User Story zuwiderläuft und diese somit verhindert. Darüber hinaus kann auch die Änderung einer bestehenden Anforderung oder das Hinzufügen einer neuen Anforderung zum bestehenden Product Backlog in der agilen Softwareentwicklung zu Konflikten führen, da sich die Bedürfnisse und Anliegen der Systemstakeholder ändern. Dies kann zu einer Vielzahl von Inkonsistenzen aufgrund widersprüchlicher Anforderungen führen, da Anforderungen von mehreren an der Produktentwicklung beteiligten Stakeholdern gestellt werden, um unterschiedliche Funktionen zu erreichen.

Um das Auftreten von Konflikten zu minimieren, sollten Teams in der Regel systematisch Abhängigkeiten zwischen User Stories innerhalb ihres Backlogs identifizieren und dokumentieren. Agile Methoden wie *Scrum* fördern die funktionsübergreifende Zusammenarbeit und tägliche Stand-up-Meetings als Mechanismen, um Abhängigkeiten und Konflikte zeitnah anzugehen und zu entschärfen. Dieser Ansatz kann jedoch zeit- und ressourcenaufwendig sein. In Fällen, in denen das Backlog sehr umfangreich ist, kann das Erkennen bestehender Konflikte zwischen User Stories zu einem komplexen Unterfangen werden.

*Modellbasiertes Software-Engineering* ist eine geeignete Methode, um die ständig steigende Komplexität von Softwareentwicklungsprozessen zu bewältigen. *Graphen* und *Graphtransformationen* haben sich als nützlich erwiesen, um solche Modelle und deren Änderungen zu visualisieren.

Da es in der agilen Softwareentwicklung keinen Prozess zur systematischen Identifizierung und Verwaltung von Konflikten zwischen in natürlicher Sprache erstellten Anforderungen gibt, soll in dieser Arbeit ein gut strukturierter Arbeitsablauf vorgestellt werden, der eine Sammlung von Techniken und Werkzeugen aus verschiedenen Bereichen verwendet, um die automatische Erkennung von Konflikten und Abhängigkeiten in natürlichsprachlichen User Stories zu beschleunigen.

# Contents

<b>1</b>	<b>Introduction</b>	<b>8</b>
<b>2</b>	<b>Related Work</b>	<b>9</b>
2.1	Role of User Stories and Backlogs in Agile Development . . . . .	10
2.2	QUS Framework and AQUUSA as a Tool . . . . .	11
<b>3</b>	<b>Preliminaries</b>	<b>22</b>
3.1	Extracting Domain Models from Textual Requirements . . . . .	22
3.2	NLP and VerbNet as a Computational Lexical Resource . . . . .	27
3.3	Analysis by Graph Transformation Tool . . . . .	32
<b>4</b>	<b>Analysing Redundancy</b>	<b>39</b>
4.1	Requirements . . . . .	39
4.2	Design . . . . .	41
4.3	Implementation . . . . .	66
4.4	Test . . . . .	85
4.5	Evaluation . . . . .	92
4.6	Conclusion . . . . .	101
<b>5</b>	<b>Analysing Conflict</b>	<b>102</b>
5.1	Requirements . . . . .	103
5.2	Design . . . . .	104
5.3	Implementation . . . . .	128
5.4	Test . . . . .	147
5.5	Evaluation . . . . .	154
5.6	Conclusion . . . . .	163





# 1 Introduction

*User stories* (USs) are fundamentally informal units in the field of software development, which should be as precise and testable as possible descriptions of the functionality of a software in the dynamic framework of *agile development*. The iterative implementation of these user stories, especially in the context of *behaviour driven development* (BDD), plays a decisive role in the efficiency and success of a project[30]. As development teams navigate through the *product backlog* to prioritise and sequence the user stories, the inherent interdependencies between them become clear, presenting challenges to efficient implementation and potential conflicts.

*Product backlog* in agile software development acts as a repository for development tasks, reflecting the evolving needs and concerns of *system stakeholders*[35]. Additionally, the involvement of a *product owner* (PO) in agile development has broken down traditional barriers between development teams and end-users, fostering an environment where the product backlog becomes a central artifact guiding the development process[35]. However, there is no formal language for expressing stories or modelling backlogs from a practical point of view. Managing dependencies between user stories is increasingly important, and although agile methodologies such as *scrum* advocate collaboration and daily stand-up meetings to resolve conflicts, the process can be resource intensive, especially with extensive backlogs.

In between automated support for extracting domain models from requirements artifacts such as USs play a central role in effectively supporting the detection of dependencies and conflicts between user stories. Domain models are a simple way to understand the relationship between artifacts and the whole system. For example, Mosser et al. propose a model engineering method (and the associated tooling) to exploit a graph-based meta-modelling and compositional approach. The objective is to shorten the feedback loop between developers and POs while supporting agile development’s iterative and incremental nature[30].

*Natural language processing* (NLP) is a *computational* method for the automated analysis and representation of human language [8]. NLP techniques offer potential advantages to improve the quality of USs and can be used to parse, extract, or analyze user story’s data. It has been widely used to help in the software engineering domain (*e.g.*, managing software requirements [3], extraction of actors and actions in requirement document [1]. Furthermore, the incorporation of computational lexicon resources like *VerbNet*<sup>1</sup> aids in semantic analysis, capturing linguistic and semantic data for a comprehensive understanding.

To systematically identify conflicts and dependencies between USs, the *critical pair analysis*(CPA) extension of Henshin is used to determine whether USs influence each other through model-driven transformation rules. CPA for graph rewriting [15] has been adapted to rule-based model transformation, *e.g.* to find conflicting functional requirements for software systems [16], or to analyses potential causal dependencies between model refactorings [27], which helps to make informed decisions about the most

---

<sup>1</sup><https://verbs.colorado.edu/verbnnet>

appropriate refactoring to apply next.

This thesis attempts to introduce a well-structured workflow. The overall goal is to develop a framework that accelerates the automatic detection of conflicts and dependencies in USs expressed in natural language using graph transformation.

For this reason, we use the model presented by Mosser et al. 2022 and present an extended model, which is visualised in Figure 1 and illustrates the subsequent phases:

- Initially, Mosser et al. used the only publicly available residue dataset as the dataset[10]. They optimise the backlog and transfer it to the *Conditional Random Fields* (CRF) tool. The CRF tool is used to generate a graph-based model that represents the refined and annotated backlog to recognise *Entities*, *Actions*, *Personas* and *Benefits* of USs[30].
- In the next step, we want to use annotated backlog datasets generated by CRF tool and utilise the actions generated by CRF that correspond to the verbs in each user story. These actions are then processed through a *computational lexical resource VerbNet*, to categorize them into four distinct categories namely “create”, “delete”, “forbid” and “preserve”.
- Following that, the *Henshin* tool, specifically the transformation module through Henshin’s *application programming interface* (API), is employed to create a class model and formulate transformation rules aligned with each user story.
- We then use a Henshin extension known as *Critical Pair Analysis* (CPA) to automatically analyse conflicts and dependencies between user stories programmatically via their API.
- With the outcomes of the CPA analysis, the requirements engineer can visualize conflicts and dependencies between user stories in a text-based format. This presentation is designed to be lightweight and facilitates comprehension for both the development team and the client.

This thesis is structured as follows: Related work is listed in section 2. In Section 3, we present a product backlog containing a set of annotated user stories to evaluate them with the QUS framework and AQUA. In Section 4, we implement a method to extract all verbs from the product backlog to categorise them into four categories, namely “create”, “delete”, “forbid” and “preserve”. In Section 5, we implement a method to convert annotated user stories into transformation rules and take action on each verb category. In Section 6, we implement a method to automatically analyse conflicts and dependencies between user stories using Henshin’s CPA programming interface and conclude with Section 7. [h]

## 2 Related Work

This section discusses relevant work such the role of USs and backlogs in agile development (Section 2.1) and the most frequently used pattern of USs is presented.

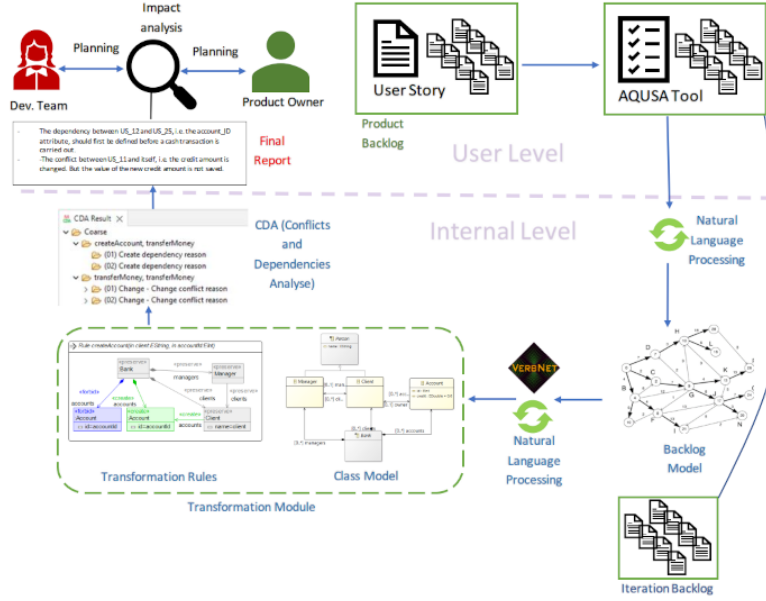


Figure 1: Extending backlog model represented by Mosser et al., 2022[30]

In Section 2.2, the focus is on the *quality user story* (QUS) framework and its tool “AQUASA” to answer the question of the existence of criteria and an automatic way to manage and identify conflicts and dependencies between user stories. Following this investigation, we draw a conclusion as to whether the existing criteria are able to optimise the USs in terms of their conflicts and dependencies.

## 2.1 Role of User Stories and Backlogs in Agile Development

The agile software development paradigm broke the wall that classically existed between the development team and end-users. Thanks to the involvement of a *product owner* (PO) who acts as a proxy to end-users for the team, the product backlog [35] became a first-class citizen during the product development.

Furthermore, thanks to a set of user stories expressing features to be implemented in the product in order to deliver value to end-users, the development teams were empowered to think in terms of added value when planning their subsequent developments. The product is then developed iteration by iteration.

Sedano et al. posited that a “product backlog is an informal model of the work to be done” [35]. A backlog implements a shared mental model among the practitioners working on a given product, acting as a boundary artefact between stakeholders. This model is voluntarily kept informal to support rapid prototyping and brainstorming sessions. Classically, backlogs are stored in project management systems, such as Jira<sup>2</sup>. These tools store user stories as tickets, where stakeholders write text as natural lan-

<sup>2</sup><https://www.atlassian.com/en/software/jira>

guage. Meta-data (*e.g.*, architecture components, severity, quality attribute) can also be attached to the stories. However, there is no formal language to express stories or model backlogs from a state of practice point of view.

A *user story* (US) is a brief, semi-structured sentence and informal description of some aspect of a software system that illustrates requirements from the user’s perspective [33]. Large, vague stories are called epics. While user stories vary widely between organizations, most observed stories included a motivation and acceptance criteria. The brief motivation statement followed the pattern: As a *<user>* I want to *<action>* so that *<value>*. This is sometimes called the *Connextra* template. The acceptance criteria followed the pattern: Given *<context>*, when *<condition>* then *<action>*. This is referred to as *Gherkin syntax*[41]. It consists of three aspects, namely aspects of *who*, *what* and *why*. The aspect of “who” refers to the system user or actor, “what” refers to the actor’s desire, and “why” refers to the reason (optional in the user story) [33].

The US components consist of the following elements[39]:

- *role*: abstract behaviour of actors in the system context; the aspect of who represents.
- *goal*: a state or circumstance that is desired by stakeholders or actors
- *task*: specific things that need to be done to achieve goals.
- *Capability*: the ability of actors to achieve goals based on certain conditions and events.

User stories usually have dependencies, i.e. the order in which they are implemented plays a decisive role. This raises the question of how to recognise and identify the relationships between the user stories.

## 2.2 QUS Framework and AQUSA as a Tool

Lucassen et al. [26] present a quality user story (QUS) framework consisting of 13 quality criteria that US authors should strive for. The criteria analysed determine the intrinsic quality of USs in terms of *syntax*, *pragmatics* and *semantics*. Figure 2 illustrates the structure of the agile requirements verification framework. Table 2 also shows the QUS framework, which defines 13 criteria for the quality of user stories.

Based on QUS, Lucassen et al. present the automatic quality user story artisan (AQUSA) software tool for assessing and enhancing US quality automatically. Relying on NLP techniques, AQUSA detects quality defects and suggests possible remedies.

A US should follow a pre-defined, agreed template, chosen from the many templates available. In the conceptual model the skeleton of the template is called *format*, which the *role*, *means*, and optional *end(s)* are interspersed to form a US [40].

Because USs are a controlled language, the QUS framework’s criteria are organized in *Lindland’s* categories [23]:

- *Syntactic quality*, about the textual structure of a US without taking its meaning into account;
- *Semantic quality*, about the relationships and the meaning of (parts of) the US text;
- *Pragmatic quality*, takes into account not only syntax and semantics, but also the subjective interpretation of the US text by the audience.

By Lucassen et al. introduced quality criteria divided into two categories, namely *Individual*, which applies to single US, and *Set*, which applies to a bundle of USs. Individual criteria can be evaluated against an individual US:

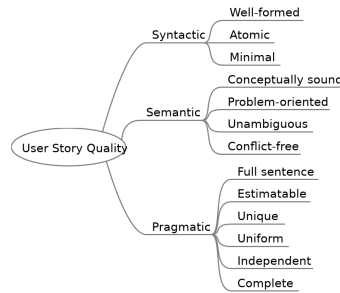


Figure 2: Agile Requirements Verification Framework [26]

### well-formed

To be considered US, the core text of the request must contain a role and the expected functionality: the *means*. Looking at the US “I want to see an error message if I can’t see recommendations after uploading an article”. It is likely that the US author has forgotten to specify the role. The error can be fixed by adding the role: “As a member, I would like to see an error message if I cannot see recommendations after uploading an article”.

### Atomic

A US should only concern one characteristic. Although it is common in practice, combining multiple USs into a larger, general US affects the accuracy of effort estimation[24]. For example, the US “As a user, I can click on a specific location on the map and thereby perform a search for landmarks associated with that combination of latitude and longitude” consists of two separate requests: Clicking on a location and viewing the associated landmarks. This US should be split into two parts:

- “As a user, I am able to click on a specific location on the map”;
- “As a user, I am able to see landmarks associated with the combination of latitude and longitude of a specific location”.

Criteria	Description	Individual/Set
<b>Syntactic</b>		
Well-formed	A user story includes at least a role and a means	Individual
Atomic	A user story expresses a requirement for exactly one feature	Individual
Minimal	A user story contains nothing more than role, means, and ends	Individual
<b>Semantic</b>		
Conceptually sound	The means expresses a feature and the ends expresses a rationale	Individual
Problem-oriented	A user story only specifies the problem, not the solution to it	Individual
Unambiguous	A user story avoids terms or abstractions that lead to multiple interpretations	Individual
Conflict-free	A user story should not be inconsistent with any other user story	Set
<b>Pragmatic</b>		
Full sentence	A user story is a well-formed full sentence	Individual
Estimable	A story does not denote a coarse-grained requirement that is difficult to plan and prioritize	Individual
Unique	Every user story is unique, duplicates are avoided	Set
Uniform	All user stories in a specification employ the same template	Set
Independent	The user story is self-contained and has no inherent dependencies on other stories	Set
Complete	Implementing a set of user stories creates a feature-complete application, no steps are missing	Set

Table 2: Quality User Story framework that defines 13 criteria for user story quality [26]

## Minimal

User stories should contain a role, a means and (ideally) some goals. Any additional information such as comments, descriptions of expected behaviour or notes on testing should be noted in additional notes. View the US “As a supervisor, I would like to see the registered hours for this week (split into products and activities). See: Mockup by Alice NOTE-first create the overview screen-then add validations”: In addition to a role and resources, it includes a reference to an undefined mockup and an indication of how the implementation should be approached. The requirements engineer should move both to separate US attributes such as the description or comments and keep only the basic story text: “As a care professional, I would like to see this week’s registered hours”.

## Conceptually sound

The middle and end parts of a US play a special role. The middle part should capture a specific feature, while the end part expresses the rationale for that feature. Let’s look at the US “As a user, I want to open the interactive map so that I can see the location of the points of interest”: The purpose is actually a dependency on another (hidden) feature that is required for the purpose to be fulfilled, which requires the presence of a database of points of interest that is not mentioned in any of the other stories. An

important additional function that is misrepresented as an end, but should be a means in a separate US, for example:

- “As a user, I would like to open the interactive map”;
- “As a user, I would like to see the location of points of interest on the interactive map”.

### **problem orientated**

According to the principle of problem specification for requirements engineering proposed by Zave and Jackson, a US should only specify the problem. If absolutely necessary, implementation notes can be included as comments or descriptions. Apart from the violation of the minimum quality criteria, this US contains “As a care professional, I would like to save a refund - Save button top right (never greyed out)” Implementation details (a solution) within the US text. The text could be rewritten as follows “As a carer I would like to save a reimbursement”.

### **Unambiguous**

Ambiguity is inherent in natural language requirements, but the requirements engineer writing USs must avoid it as much as possible. A US should not only be internally unambiguous, but should also be unambiguous in relation to all other USs. The taxonomy of ambiguity types [6] provides a comprehensive overview of the types of ambiguity that can occur in a systematic requirements specification.

In this US “As a user, I am able to edit the content I have added to a person’s profile page”, “content” is a superclass that refers to audio, video, and text media uploaded to the profile page, as specified in three other, separate user stories in the real US record. The requester should explicitly mention which media is editable; for example, the story can be modified as follows: “As a user, I am able to edit video, photo and audio content that I have added to a person’s profile page”.

### **Full sentence**

A US should read like a complete sentence, without typos or grammatical errors. The US “server configuration”, for example, is not formulated as a complete sentence (and does not correspond to the syntactic quality). By reformulating the feature as a complete sentence US, it automatically specifies what exactly needs to be configured. For example, US “Server configuration” can be converted to “As an administrator, I would like to configure the sudo-ers of the server”.

### **Estimatable**

The larger and more complex the US becomes, the more difficult it is to accurately estimate the required effort. Therefore, any US should not become so large that it

becomes impossible to estimate and plan with reasonable certainty<sup>3</sup>. For example, the US “As a carer, I would like to see my route list for the next/future days so that I can prepare (e.g. I can see when I should start the journey)” a route list so that carers can prepare.

This may be an unordered list of places to visit during the working day. However, it is equally likely that the function includes an algorithmic arrangement of routes to minimise the distance travelled and/or display the route on a map. These many functionalities make an accurate estimate difficult and make it necessary to split the US into several user stories, for example:

- “As a carer, I would like to see my route list for the next/future days so that I can prepare”;
- “As a manager, I would like to upload a route list for carers”.

The following quality criteria refer to a collection of USs. These quality criteria are relevant for assessing the quality of the entire project specification, as they focus on the entirety of the project specification and not on the individual review of each individual story:

### Unique and conflict-free

The concept of unique USs, which emphasises the avoidance of semantic similarity or duplication within a project. For example, consider  $EP_a$ : “As a visitor, I can see a list of messages so I can stay up to date” and  $US_a$ : “As a visitor, I can see a list of messages so I can stay up to date”. This situation can be improved by offering more specific messages, such as:

- $US_{a1}$  “As a visitor, I am able to see the latest news,”
- $US_{a2}$  “As a visitor I am able to see sports news”

It is also important to avoid conflicts between user stories to ensure their quality. A requirements conflict occurs when two or more requirements cause an inconsistency[31][34]. For example, consider the story  $US_b$ : “As a User, I am able to edit any landmark” contradicts the requirement that a user can edit any landmark ( $US_c$ : “As a User, I am able to delete only the landmarks that I added”), if we assume that edit is a general term that includes delete.  $US_b$  refers to any landmark, while  $US_c$  refers only to those that the user has added. One possible way to fix this is to change  $US_b$ : “As a user, I can edit the landmarks I have added”. [26]

To recognise these types of relationships, each US part must be compared with the parts of the other USs using a combination of similarity measures that are either syntactic (e.g. Levenshtein distance) or semantic (e.g. using an ontology to determine synonyms). If the similarity exceeds a certain threshold, a human analyst must analyse the USs for possible conflicts and/or duplicates.

---

<sup>3</sup><http://xp123.com/articles/invest-in-good-stories-and-smart-tasks/>



**Definition 2.1.** A US  $\mu$  is a 4-tuple  $\mu = (r, m, E, f)$ , where  $r$  is the role,  $m$  is the mean,  $E = (e_1, e_2, \dots)$  is a set of ends and  $f$  is the format. A means  $m$  is a 5-tuple  $m(s, av, do, io, adj)$ , where  $s$  is a subject,  $av$  an action verb,  $do$  a direct object,  $io$  an indirect object and  $adj$  an adjective ( $io$  and  $adj$  can be zero, see figure 3). The set of user stories in a project is denoted by  $U = (\mu_1, \mu_2, \dots)$ .

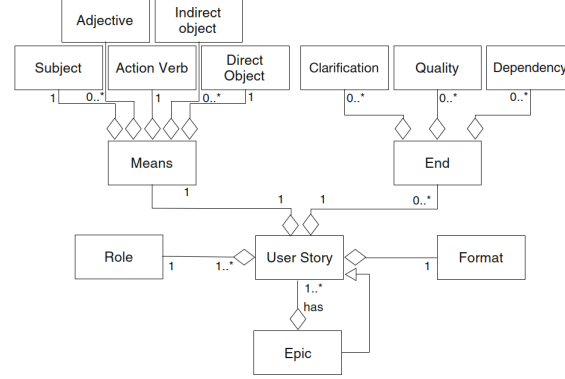


Figure 3: Conceptual model of the user stories [26]

## uniform

Uniformity refers to the consistency of a US format where the majority of USs are within the same set. To assess uniformity, the Requirements Engineer determines the most common format, which is usually determined in collaboration with the team. For example, the US “As administrator, I receive an email notification when a new user is registered” is presented as a non-uniform US and can be rewritten as follows to improve uniformity: “As an administrator, I would like to receive an email notification when a new user is registered”.

## Independent

USs should be able to be planned and implemented in any order and should not overlap conceptually.

It is recommended that all dependencies are made explicit and visible, as complete independence is not always achievable. In addition, some interdependencies may not be possible to resolve, and you may want to consider making these interdependencies visible in a practical way, for example by adding notes to story cards or by linking to them in the issue tracker. Two examples of dependency are given:

- *causality*: Sometimes a US ( $l_1$ ) needs to be completed before another ( $l_2$ ) may start. which states that  $l_1$  is causally dependent on  $l_2$  if certain conditions are satisfied.

- *superclasses*: USs can contain an object (*e.g.*, “content” in US “As a user, I can edit the content I’ve added to a person’s profile page”) that references several other objects in different histories. This means that the object in  $l_1$  serves as a parent or superclass for the other objects.

## Complete

The implementation of a series of USs should result in a complete application. Whilst it is not necessary for the USs to cover 100% of the application’s functionality from the outset, it is important not to overlook any essential USs as this can create a significant functionality gap that hinders progress. Take for example the US “As a user, I can edit the content I have added to a person’s profile page”, which requires the presence of another story describing the creation of content. This scenario can be extended to USs with action verbs that refer to non-existent direct objects, such as reading, updating or deleting an item, which requires its prior creation. To address these dependencies with respect to the direct object of the agent, Lucassen et al. introduce a conceptual relation.

## The Automatic Quality User Story Artisan (AQUSA)

The QUS framework provides guidelines for improving the quality of USs. To support the framework, Lucassen et al. propose the AQUSA tool, which exposes defects and deviations from good US practice [26]. AQUSA primarily targets easily describable and algorithmically determinable defects in the clerical part of requirements engineering, focusing on syntactic and some pragmatic criteria, while omitting semantic criteria that require a deep understanding of requirements’ content [26]. AQUSA consists of five main architectural components (Figure 4): linguistic parser, US base, analyzer, enhancer, and report generator.

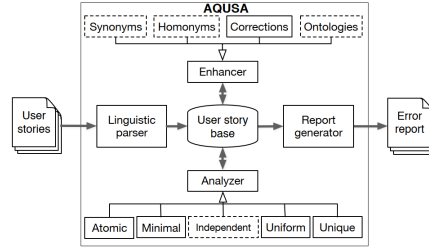


Figure 4: Functional view on architecture of AQUSA. Dashed components are not fully implemented yet [26]

The first step for every US is validating that it is well-formed. This takes place in the linguistic parser, which separates the US in its role, means and end(s) parts. The US base captures the parsed US as an object according to the conceptual model, which acts as central storage. Next, the analyzer runs tailormade method to verify specific syntactic and pragmatic quality criteria—where possible enhancers enrich the US base,

improving the recall and precision of the analyzers. Finally, AQUUSA captures the results in a comprehensive report [26].

In the case of story analysis, AQUUSA v1 conducts multiple analyses, beginning with the *StoryChunker* and subsequently executing the Unique-, Minimal-, WellFormed-, Uniform-, and *AtomicAnalyzer* modules. If any of these modules detect a violation of quality criteria, they engage the *DefectGenerator* to record the defect in the associated database tables related to the story. Additionally, users have the option to utilize the AQUUSA-GUI to access a project list or view a report of defects associated with a set of stories.

### **Linguistic Parser: Well-Formed**

One of the essential aspects of verifying whether a string of text is a US is splitting it into *role*, *means*, and *end(s)*. This initial step is performed by the linguistic parser, implemented as the StoryChunker component. It identifies common indicators in the US, such as “As a”, “I want to”, “I am able to”, and “so that”. The linguistic parser then categorizes words within each chunk using the Stanford NLP POS Tagger and validates the following rules for each chunk:

- **Role:** Checks if the last word is a noun representing an actor and if the words preceding the noun match a known role format (*e.g.*, “as a”).
- **Means:** Verifies if the first word is “I” and if a known means format like “want to” is present. It also ensures the remaining text contains at least one verb and one noun (*e.g.*, “update event”).
- **End:** Checks for the presence of an end and if it starts with a recognized end format (*e.g.*, “so that”).

The linguistic parser validates whether a US adheres to the conceptual model. When it cannot detect a known means format, it retains the full US and eliminates the role and end sections. If the remaining text contains both a verb and a noun, it’s tagged as a “potential means,” and further analysis is conducted. Additionally, the parser checks for a comma after the role section.

### **User Story Base and Enhancer**

Linguistically parsed USs are transformed into objects containing role, means, and ends components, aligning with the first level of decomposition in the conceptual model. These parsed USs are stored in the US base for further processing. AQUUSA enriches these USs by adding potential synonyms, homonyms, and relevant semantic information sourced from an ontology to the pertinent words within each chunk. Additionally, AQUUSA includes a corrections’ subpart, ensuring precise defect correction where possible.

### **Analyzer: Explicit Dependencies**

AQUSA enforces that USs with explicit dependencies on other USs should include navigable links to those dependencies. It checks for numbers within USs and verifies whether these numbers are enclosed within links. For instance, if a US reads, “As a care professional, I want to edit the planned task I selected—see 908,” AQUSA suggests changing the isolated number to “See PID-908,” where PID represents the project identifier. When integrated with an issue tracker like Jira or Pivotal Tracker, this change would automatically generate a link to the dependency, such as “see PID-908 (<http://company.issuetracker.org/PID-908>.” It’s worth noting that this explicit dependency analyzer has not been implemented in AQUSA v1 to ensure its universal applicability across various issue trackers.

### **Analyzer: Atomic**

AQUSA examines USs to ensure that the means section focuses on a single feature. To do this, it parses the means section for occurrences of the conjunctions “and, &, +, or”. If AQUSA detects double feature requests in a US, it includes them in its report and suggests splitting the US into multiple ones. For example, a US like “As a User, I’m able to click a particular location from the map and thereby perform a search of landmarks associated with that latitude-longitude combination” would prompt a suggestion to split it into two USs: (1) “As a User, I want to click a location from the map” and (2) “As a User, I want to search landmarks associated with the lat-long combination of a location.”

AQUSA v1 verifies the role and means chunks for the presence of the conjunctions “and, &, +, or”. If any of these conjunctions are found, AQUSA checks whether the text on both sides of the conjunction conforms to the QUS criteria for valid roles or means. Only if these criteria are met, AQUSA records the text following the conjunction as an atomicity violation.

### **Analyzer: Minimal**

AQUSA assesses the minimality of USs by examining the role and means of sections extracted during chunking and *well-formedness* verification. If AQUSA successfully extracts these sections, it checks for any additional text following specific punctuation marks such as dots, hyphens, semicolons, or other separators. For instance, in the US “As a care professional I want to see the registered hours of this week (split into products and activities). See: Mockup from Alice NOTE: First create the overview screen—Then add validations,” AQUSA would flag all text following the first dot (“.”) as non-minimal. Additionally, any text enclosed within parentheses is also marked as non-minimal. AQUSA v1 employs two separate minimality checks using regular expressions. The first check searches for occurrences of special punctuation marks like “, -, ?, ., \*.” and marks any text following them as a minimality violation. The second check identifies text enclosed in brackets such as “(), [], {}, <>” and records it as a minimality violation.

### **Analyzer: Uniform**

AQUSA, in addition to its chunking process, identifies and extracts the format parts of USs and calculates their occurrences across all USs in a set. The most frequently occurring format is designated as the standard US format. Any US that deviates from this standard format is marked as non-compliant and included in the error report. For example, if the standard format is “I want to,” AQUSA will flag a US like “As a User, I am able to delete a landmark” as non-compliant because it does not follow the standard. After the linguistic parser processes all USs in a set, AQUSA v1 initially identifies the most common US format by counting the occurrences of indicator phrases and selecting the most frequent one. Later, the uniformity analyzer calculates the edit distance between the format of each individual US chunk and the most common format for that chunk. If the edit distance exceeds a threshold of 3, AQUSA v1 records the entire story as a uniformity violation. This threshold ensures that minor differences, like “I am” versus “I’m,” do not trigger uniformity violations, while more significant differences in phrasing, such as “want” versus “can,” “need,” or “able,” do.

### **Analyzer: Unique**

AQUSA has the capability to utilize various similarity measures, leveraging the WordNet lexical database to detect semantic similarity. For each verb and object found in the means or end of a US, AQUSA performs a WordNet::Similarity calculation with the corresponding verbs or objects from all other USs. These individual calculations are combined to produce a similarity degree for two USs. If this degree exceeds 90%, AQUSA flags the USs as potential duplicates.

### **AQUSA-GUI: report generator**

After AQUSA detects a violation in the linguistic parser or one of the analyzers, it promptly creates a defect record in the database, including details such as the defect type, a highlight of where the defect is located within the US, and its severity. AQUSA utilizes this data to generate a comprehensive report for the user. The report begins with a dashboard that provides a quick overview of the US set’s quality. It displays the total number of issues, categorized into defects and warnings, along with the count of perfect stories. Below the dashboard, all USs containing issues are listed, accompanied by their respective warnings and errors. An example is illustrated in figure 5.

## **Conclusion**

In the QUS framework, a conflict is defined as a requirements conflict that occurs when two or more requirements cause an inconsistency. As far as the inconsistency is concerned, it is not clear to which form it actually belongs. Is it a content inconsistency or an inconsistency in the sense that two USs are very close to each other and describe the matter slightly differently, which leads to an inconsistency that we can understand as a similarity?

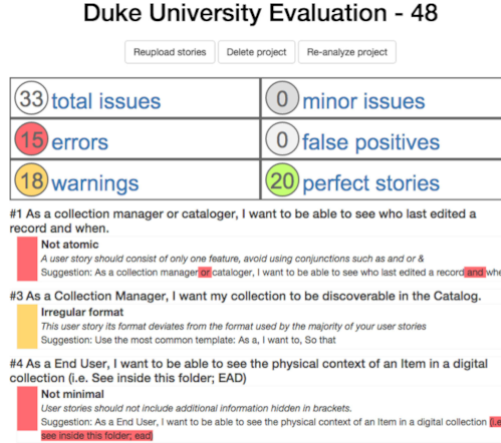


Figure 5: Example report of a defect and warning for a story in AQUASA [26]

If we look at the analysis of the similarity of texts, *e.g.* with transformation tools or similar, we realize that our analysis cannot effectively recognise strong overlaps between USs and will not act precisely. We try to capture the content of the USs through the annotation just through the action, so we can do very lightweight conflict analysis similarity of texts. Very lightweight because there are many inaccuracies, as is often the case with the USs. But otherwise it is as if the analysis of two USs are similar but not the same, and somehow contradict each other.

One is the conflict that can arise in the final described system versus the inconsistencies during the specification of USs. The content-related conflict in the quality criterion is not even mentioned. They described how the USs were written down and do not refer to content conflicts.

Similarly, with dependencies, there are explicit dependencies to define in the USs by saying this US is based on that and giving it an ID. In another case, we can analyse implicit dependencies by determining, *e.g.*, something has to be created at this position first so that it can be used in another position and so creating and using it happens in two different USs. We call this implicit dependency because it is not explicitly stated in USs, but if we analyse what is there semantically, we can find out that there is a dependency.

In addition, we could use the US-ID to obtain information about the implicit dependencies between USs and compare these with the explicit dependencies to ensure that explicit and implicit dependencies are consistent with each other?

Both conflicts and dependencies are interesting and both terms and both analyses we would sharpen and make clear what can be analysed at all. However, this only partially fits in with the quality framework here from AQUASA-tool.

**Example 2.1.** Considering two USs:  $US_1$ : “As a user, I am able to edit any landmark” and  $US_2$ : “As a user, I am able to delete only the landmarks that I added”. First, we try to minimize  $US_1$  and divided it into three USs namely:

- $US_{1a}$ : “As a user, I am able to add any landmark.”
- $US_{1b}$ : “As a user, I am able to modify any landmark.”
- $US_{1c}$ : “As a user, I am able to delete any landmark.”

$US_{1c}$  means that two users are allowed to delete the same landmark, which would lead to a conflict. This conflict can be avoided if  $US_{1c}$  is replaced with  $US_2$ , as two users are then no longer allowed to delete the same landmark. Furthermore, this situation cause an inconsistency between  $US_{1c}$  and  $US_2$ , e.g. if  $US_2$  deletes the landmark that was added by a particular user,  $US_{1c}$  can no longer find this landmark and vice versa.

Moreover, analyzing dependencies through AQUASA v1 is a component of the forthcoming effort by Lucassen et al. Which means, the automatic analysis of dependencies and conflicts between USs is an area that requires future attention and development. In this context, we would like to contribute by addressing this unmet need.

### 3 Preliminaries

In the 3.1 Section, we introduce *conditional random fields* (CRF) for the extraction of domain models from agile product backlogs, which play a central role in effectively supporting the identification of dependencies and conflicts between user stories. Furthermore, we conduct a conclusion.

Next, we dive into the Section *nlp* and introduce *natural language processing* (NLP) and *VerbNet* as a computational lexicon resource as well as a conclusion.

Finally, in Section 3.3, some basic definitions of *graphs* and *graph transformation rules* are laid down for better understanding. We then look at the graph transformation tool *Henshin* and its extension *critical pair analysis* (CPA), which plays a central role in our methodology. We also draw a conclusion and explain why we have chosen these techniques and what their central idea is.

#### 3.1 Extracting Domain Models from Textual Requirements

Automated support for extracting domain models from requirements artifacts such as USs play a central role in effectively supporting the detection of redundancies and conflicts between user stories. Domain models are a simple way to understand the relationship between artifacts and the whole system. In this subsection, we present a graph-based extraction modelling approach called CRF and conclude our review.

#### A Modelling Backlog as Composable Graphs

Mosser et al. propose a model engineering method (and the associated tooling) to exploit a graph-based meta-modelling and compositional approach. The objective is to shorten the feedback loop between developers and POs while supporting agile development’s iterative and incremental nature.

The tool can extract what is called a conceptual model of a backlog in an ontology-like way. The conceptual models are then used to measure USs quality by detecting ambiguities or defects in a given story [30]. From a modelling point of view, Mosser et al. represents the concepts involved in the definition of a backlog in a metamodel, as depicted in figure 6. Without surprise, the key concept is the notion of story, which brings a benefit to a *Persona* thanks to an Action performed on an *Entity*. A Story is associated to a readiness *Status*, and might optionally contribute to one or more *QualityProperty* (e.g., security, performance).

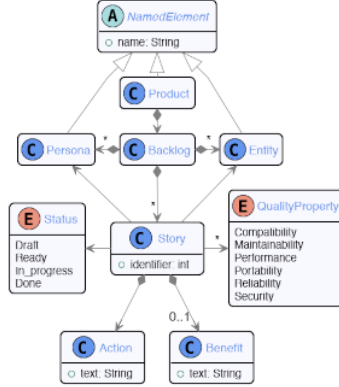


Figure 6: Backlog conceptual metamodel [30]

Consider, for example, the following story, extracted from the reference dataset [11]: “As a user, I want to click on the address so that it takes me to a new tab with Google Maps.”. *This story brings to the user (Persona) the benefit of reaching a new Google Maps tab (Benefit) by clicking (Action) on the displayed address (Entity).*

As Entities and Personas implement the *jargon* to be used while specifying features in the backlog, they are defined at the *Backlog level*. On the contrary, Actions belong to the associated stories and are not shared with other stories. Finally, a *Product* is defined as the *Backlog* used to specify its features.

Mosser et al. propose in the context of backlog management a system which represented in figure 7 is proposed for utilization. Building upon the efficiency of NLP approaches. Mosser et al. suggest employing an NLP-based extractor to create a backlog model. This model will subsequently assist teams in the planning phase by aiding in the selection of stories for implementation during the upcoming iteration [30].

## Composable Backlogs

In order to support team customization (e.g., a given team might want to enrich the backlog metamodel with additional information existing in their product management system) Mosser et al. chose open-world(ontological) representation by modelling backlog as graphs [30]. The graph is equipped with constraints (e.g., a story always refers to a persona and an entity) to ensure that the minimal structure captured in the previously



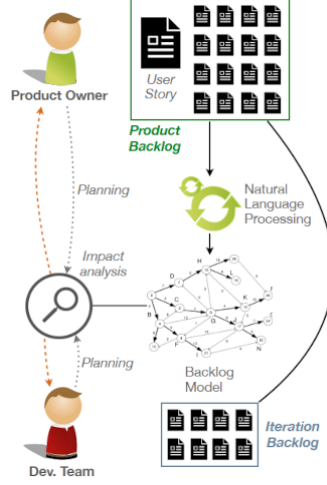


Figure 7: Providing early feedback at the backlog level [30]

defined metamodel is guaranteed.

**Definition 3.1 (Story).** A *Story*  $s \in S$  is defined as a tuple  $(P, A, E, K)$ , where  $P = \{p_1, \dots, p_i\}$  is the set of involved personas,  $A = \{a_1, \dots, a_i\}$  the set of performed actions, and  $E = \{e_1, \dots, e_k\}$  the set of targeted entities. Additional knowledge (e.g., benefit, architectural properties, status) can be declared as key-value pairs in  $K = \{(k_1, v_1), \dots, (k_l, v_l)\}$ . The associated semantics is that the declared actions bind personas to entities. Considering that story independence is a pillar of agile methods (as, by definition, stories are independent inside a backlog), there is no equivalence class defined over  $S : \forall (s, s') \in S^2, s \neq s' \Rightarrow s \not\equiv s'$ .

**Definition 3.2 (Backlog).** A *backlog*  $b \in B$  is represented as an attributed typed graph  $b = (V, E, A)$ , with  $V$  a set of typed vertices,  $E$  a set of undirected edges linking existing vertices, and  $A$  a set of key-value attributes. Vertices are typed according to the model element they represent  $v \in V, \text{type}(v) \in \{\text{Persona}, \text{Entity}, \text{Story}\}$ . Edges are typed according to the kind of model elements they are binding. Like backlogs, vertices and edges can contain attributes, represented as (key, value) pairs. The empty backlog is denoted as  $\emptyset = (\emptyset, \emptyset, \emptyset)$ .

**Example 3.1.** *Backlog excerpt: Content Management System for Cornell University — CulRepo* [11].

- $s_1$ : As a faculty member, I want to access a collection within the repository.

Associated model:

- $s_1 = (\{\text{facultymember}\}, \{\text{access}\}, \{\text{repository}, \text{collection}\}, \emptyset) \in S$

A backlog containing a single story  $s_1$ : (“As a faculty member, I want to access a collection within the repository”).

$$\begin{aligned}
b_1 &= (V_1, E_1, \emptyset) \in B \\
V_1 &= \{Persona(faculty\ member, \emptyset), \\
&\quad Stroy(s_1, \{(action, access)\}) \\
&\quad Entity(repository, \emptyset), \\
&\quad Entity(collection, \emptyset)\} \\
E_1 &= \{has\_for\_persona(s_1, faculty\ member), \\
&\quad has\_for\_entity(s_1, repository) \\
&\quad has\_for\_entity(s_1, collection)\}
\end{aligned}$$

## Conditional Random Fields (CRF)

CRFs [21] are a particular class of *Markov Random Fields*, a statistical modelling approach supporting the definition of discriminative models. They are classically used in pattern recognition tasks (labelling or parsing) when context is important identify such patterns [4].

To apply CRF Mosser et al. transform a given story into a sequence of tuples. Each tuple contains minimally three elements: *(i)* the original word from the story, *(ii)* its syntactical role in the story, and *(iii)* its semantical role in the story. The syntactical role in the sentence is classically known as *Part-of-Speech* (POS), describing the grammatical role of the word in the sentence. The semantical role plays a dual role here. For training the model, the tags will be extracted from the annotated dataset and used as target. When used as a predictor after training, these are the data Mosser et al. will ask the model for infer.

The main limitations of CRF are that *(i)* it works at the word level (model elements can spread across several words), and *(ii)* it is not designed to identify relations between entities [4]. To address the first limitation, Mosser et al. use a glueing heuristic. Words that are consecutively associated with the same label are considered as being the same model element, *e.g.*, the subsequence [“UI”, “designer”] from the previous example is considered as one single model element of type *Persona*.

Mosser et al. applied this heuristic to everything but verbs, as classically, two verbs following each other represent different actions. They used again heuristic approach to address the second limitation. Mosser et al. bound every *Persona* to every primary *Action* (as *trigger* relations), and every primary *Actions* to every primary *Entity* (as *target* relations) [4].

**Example 3.2.** Consider the following example:

$$\begin{aligned}
S &= [As', a', UI', designer', ', \dots] \\
POS(S) &= [ADP, DET, NOUN, NOUN, PUNCT, \dots] \\
Label(S) &= [\emptyset, \emptyset, PERSONA, PERSONA, \emptyset, \dots]
\end{aligned}$$

*S* represents a given US (Table 6). *POS(S)* represent the Part-of-speech analysis of *S*. The story starts with an adposition (ADP), followed by determiner (DET), followed

by a noun, followed by another noun, .... Then, *Labels (S)* represents what we interest in: the first two words are not interesting, but the 3<sup>rd</sup> and 4<sup>th</sup> words represent a *Persona*. A complete version of the example is provided in Table 6.

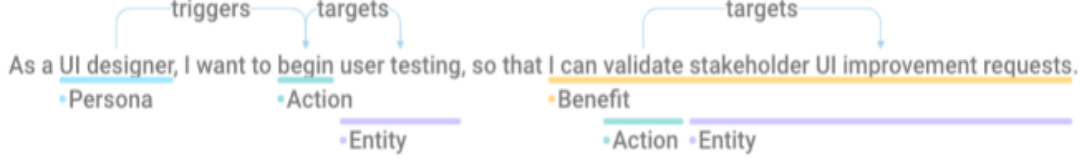


Figure 8: Example of annotated user using Doccano Annotation UI [4]

Word	As	a	UI	designer	,	I	want	to	begin	user	testing	,
POS	ADP	DET	NOUN	NOUN	PUNCT	PRON	VERB	PART	VERB	NOUN	NOUN	PUNCT
Label	-	-	PER	PER	-	-	-	-	P-ACT	P-ENT	P-ENT	-

Word	so	that	I	can	validate	stakeholder	UI	improvement	requests	.
POS	SCONJ	SCONJ	PRON	AUX	VERB	NOUN	NOUN	NOUN	NOUN	PUNCT
Label	-	-	-	-	S-ACT	S-ENT	S-ENT	S-ENT	S-ENT	-

POS tags are the Universal POS tags

Labels: PER (Persona), P-ACT (Primary Action), P-ENT (Primary Entity), S-ACT (Secondary Action), S-ENT (Secondary Entity)

Table 6: Minimal Feature Set, associating part-of-speech (POS) and semantic labels to each word in a given story [4]

## Doccano Tool

Doccano<sup>4</sup> is an open-source annotation tool designed to facilitate the labelling and tagging of textual data for various Natural Language Processing tasks. Its user-friendly interface and versatile functionalities make it suitable for different annotation purposes, including Named Entity Recognition (NER), text classification, and sequence labelling. It supports collaborative annotation efforts, making it an ideal choice for projects requiring high-quality labelled datasets.

Doccano proved to be an effective tool for Mosser et al. in annotating USs, enabling them to create a reliable dataset with high interrater agreement. Its ease of use, collaborative features, and support for complex annotation schemes make it a valuable asset for any annotation project in the field of NLP.

<sup>4</sup><https://doccano.github.io/doccano>

## Annotating User Stories with Doccano

Mosser et al. used publicly available requirements, focusing on a dataset from Dalpiaz et al.[11], which includes 22 product backlogs and 1,679 USs. This dataset is a raw archive of 22 text files, each containing USs for a product, one per line. They noted the absence of publicly available expert annotations providing ground truth for the dataset’s concepts.

To address this, they manually annotated the dataset using the Doccano tool as a *Named Entity Recognition* task. They applied labels such as persona, action, entity, and benefit part, along with two relations (triggers and contains) from their domain meta-model. Figure 8 shows example of annotated US using Doccano. Quality checks included:

- Initial calibration on 75 randomly selected stories.
- Fortnightly validation sessions over two months.
- Manual review of 330 randomly selected annotated stories (19.6%).

They found no significant discrepancies, with only 21 elements disputed, resulting in a 94% interrater agreement, considered excellent.

## Conclusion

The Conditional Random Fields (CRF) approach is graph-based and is designed to achieve a high degree of precision and recall, which is particularly important in the context of domain concept extraction. The CRF approach can encompass both syntactic and semantic aspects, particularly when complemented by a suitable conceptual meta-model. This makes it a suitable candidate for definition as a type graph in Henshin.

However, due to the aforementioned limitations of the CRF tool, specifically the exclusion of secondary actions and entities within relations such as trigger and target, we opted for annotated datasets using Doccano presented by Mosser et al. This was because it labelled a greater number of relations such contains and targets, even between secondary actions and entities, which should facilitate precise evaluation in further analysis.

The annotations generated by Doccano can then be utilised for transformation into a rule-based graph transformation system, which enhances support for DevOps practices.

## 3.2 NLP and VerbNet as a Computational Lexical Resource

Natural language processing (NLP) is a computational method for the automated analysis and representation of human language [8]. NLP techniques offer potential advantages to improve the quality of USs and can be used to parse, extract, or analyze US’s data. It has been widely used to help in the software engineering domain (*e.g.*, managing software requirements [3], extraction of actors and actions in requirement document [1].

NLP techniques are usually used for text preprocessing (*e.g.*, tokenization, *Part-of-Speech* (POS) tagging, and dependency parsing). Several NLP approaches can be

used (*e.g.*, syntactic representation of text and computational models based on semantic features). Syntactic methods focus on word-level approaches, while the semantic focus is on multiword expressions [8].

A computational lexicon resource is a systematically organized repository of words or terms, complete with linguistic and semantic data. These lexicons play a pivotal role in facilitating NLP systems focused on semantic analysis by offering comprehensive insights into language elements, encompassing word forms, part-of-speech (POS) categories, phonetic details, syntactic properties, semantic attributes, and frequency statistics. Lexical classes, defined in terms of shared meaning components and similar (morpho-) syntactic behaviour of words, have attracted considerable interest in NLP [8]. These classes are useful for their ability to capture generalizations about a range of (cross-) linguistic properties. NLP systems can benefit from lexical classes in a number of ways. As the classes can capture higher level abstractions (*e.g.* syntactic or semantic features) they can be used as a principled means to abstract away from individual words when required. Their predictive power can help compensate for lack of sufficient data fully exemplifying the behaviour of relevant words [19].

Upon the completion of the transformation of USs utilizing a Conditional Random Fields (CRF) approach, wherein entities, actions (both primary and secondary), persona, and their relational attributes (specifically, triggers, targets and contains) are meticulously annotated and structured as a graph-based representation, a preliminary imperative emerges. This imperative entails the determination of a representative semantic interpretation for the ascertained actions. This determination, in turn, serves as a prerequisite for the generation of corresponding transformation rules, namely, “create”, “delete”, “preserve” and “forbidden” rules.

The attainment of this representative semantic interpretation hinges upon the application of a suite of foundational lexical resource techniques of a conceptual nature. These techniques assume a pivotal role in furnishing the essential cognitive infrastructure, facilitating a comprehensive grasp of the semantic roles, syntactic characteristics, and the systematic categorization to “creation”, “deletion”, “preservation” and “forbiddance” of linguistic elements embedded within the construct of the US.

## VerbNet

VerbNet (VN) is a hierarchical domain-independent, broad-coverage verb lexicon with mappings to several widely-used verb resources, including WordNet [28], Xtag [32], and FrameNet [5]. It includes syntactic and semantic information for classes of English verbs derived from Levin’s classification, which is considerably more detailed than that included in the original classification.

Each verb class in VN is completely described by a set of members, thematic roles for the predicate-argument structure of these members, selectional restrictions on the arguments, and frames consisting of a syntactic description and semantic predicates with a temporal function, in a manner similar to the event decomposition of Moens and Steedman [29]. The original Levin classes have been refined, and new subclasses added to achieve syntactic and semantic coherence among members.

## Syntactic Frames

Semantic restrictions, such as constraints related to animacy, humanity, or organizational affiliation, are employed to limit the types of thematic roles allowed within these classes. Furthermore, each syntactic frame may have constraints regarding which prepositions can be used.

Additionally, there may be additional constraints placed on thematic roles to indicate the likely syntactic nature of the constituent associated with that role. Levin classes are primarily characterized by NP (noun phrase) and PP (prepositional phrase) complements.

Some classes also involve sentential complementation, albeit limited to distinguishing between finite and non-finite clauses. This distinction is exemplified in VN, particularly in the frames for the class Tell-37.2, as shown in Examples (1) and (2), to illustrate how the differentiation between finite and non-finite complement clauses is implemented.

1. Sentential Complement (finite):  
“Susan told Helen that the room was too hot.”  
*Agent V Recipient Topic [+sentential – infinitival]*
2. Sentential Complement (nonfinite):  
“Susan told Helen to avoid the crowd.”  
*Agent V Recipient Topic [+infinitival – wh\_inf]*

## Semantic Predicates

Each VN frame also contains explicit semantic information, expressed as a conjunction of Boolean semantic predicates such as “motion”, “contact”, or “cause”. Each of these predicates is associated with an event variable  $E$  that allows predicates to specify when in the event the predicates are true  $start(E)$  for preparatory stage,  $during(E)$  for the culmination stage, and  $end(e)$  for the consequent stage).

Relations between verbs (or classes) such as antonymy and entailment present in WordNet and relations between verbs (and verb classes) such as the ones found in FrameNet can be predicted by semantic predicates. Aspect in VN is captured by the event variable argument present in the predicates.

## The VerbNet Hierarchy

VerbNet represents a hierarchical structure of verb behaviour, with groups of verb classes sharing similar semantics and syntax. Verb classes are numbered based on common semantics and syntax, and classes with the same top-level number (e.g., 9-109) have corresponding semantic relationships.

For instance, classes related to actions like “putting”, such as “put-9.1”, “put\_spatial-9.2”, “funnel-9.3”, all belong to class number 9 and relate to moving an entity to a location. Classes sharing a top class can be further divided into subclasses, as seen with “wipe” verbs categorized into “wipe\_manner” (10.4.1) and “wipe\_inst” (10.4.2) specifying

the manner and instrument of “wipe” verbs in the “Verbs of Removing” group of classes (class number 10).

The classification encompasses class numbers 1-57, derived from Levin’s classification [22], and class numbers 58-109, developed later by Korhonen and Briscoe [20]. The later classes are more specific, often having a one-to-one relationship between verb type and verb class. This hierarchical structure helps categorize and organize verbs based on their semantic and syntactic properties.

## Verb Class Hierarchy Contents

Each individual verb class within VerbNet is hierarchical. These classes can include one or more “subclasses” or “child” classes, as well as “sister” classes. All verb classes have a top-level classification, but some provide further specification of the behaviours of their verb members by having one or more subclasses.

Subclasses are identified by a dash followed by a number after the class information. For example, the top class might be “spray-9.7”, and a subclass would be denoted as “spray 9.7-1”. This hierarchy allows for a more detailed and structured organization of verb behaviour within VerbNet.

- **Top Class:** The highest class in the hierarchy; all features in the top class are shared by every verb in the class. The top class of the hierarchy consists of syntactic constructions and semantic role labels that are shared by all verbs in this class.
- **Parent Class:** Dominates a subclass; all features are shared with subordinate classes.
- **Subclasses:** VerbNet subclasses inherit features from the top class but specify further syntactic and semantic commonalities among their verb members. These can include additional syntactic constructions, further selectional restrictions on semantic role labels, or new semantic role labels.
- **Child Class:** Is dominated by a parent class; inherits features from this parent class, but also adds information in the form of additional syntactic frames, thematic roles, or restrictions.
- **Sister Class:** A subclass directly dominated by a parent class. This parent class also, directly dominates another subclass, so the two subclasses are sisters to one another. Sister classes do not share features.

Figure 9 illustrate an example of class hierarchy from spray-9.7 class. Verb Classes are numbered according to shared semantics and syntax, and classes which share a top-level number (9-109) have corresponding semantic relationships.

For instance, verb classes related to putting, such as put-9.1, put\_spatial-9.2, funnel-9.3, etc. are all assigned to the class number 9 and related to moving an entity to a location.





### 3.3 Analysis by Graph Transformation Tool

In a software development process, the class architecture is getting changed over the development, *e.g.* due to a change of requirements, which results in a change of the class diagram. During runtime of a software, an object diagram can also be modified through creating or deleting of new objects.

Many structures, that can be represented as graph, are able to change or mutate. This suggests the introduction of a method to modify graphs through the creation or deletion of nodes and edges. This graph modification can be performed by the so-called graph transformations. There are many approaches to model graph transformations *e.g.* the double pushout approach or the single pushout approach, which are both concepts based on pushouts from category theory in the category Graphs.

In this section, some basic definitions about graph transformation and transformation rules are first established for better understanding. Afterwards, we dive into graph transformation tool Henshin [2], which plays a pivotal role in our methodology.

#### Graphs and Typed Graphs

A graph consists of nodes and edges, with each edge connecting precisely two nodes and having the option to be directed or undirected. When an edge is directed, it designates a distinct start node (source) and an end node (target). For the purpose of this discussion, we will focus on directed graphs.

**Definition 3.3 (graph).** A graph  $G = (V, E, s, t)$  contains  $V$ , a set of nodes,  $E$ , a set of edges,  $s : E \rightarrow V$ , a source function, where  $s(e)$  is the start node of  $e \in E$  and a target function  $t : E \rightarrow V$ , where  $t(e)$  is the end node of a edge  $e \in E$ .

**Definition 3.4 (Transformation Rule).** A transformation rule denotes which nodes and edges of a graph have to be deleted and which nodes and edges have to be created. In the double-pushout approach a transformation rule  $p = L \xleftarrow{l} K \xrightarrow{r} R$  consists of three graphs  $L, K, R$ , two graph morphisms  $l : K \rightarrow L$  and  $r : K \rightarrow R$ , where  $K$  contains all elements, that remain in the graph,  $L \setminus l(K)$  contains the elements that are removed and  $R \setminus r(K)$  contains the elements, that are created.

**Definition 3.5 (Graph Transformation).** In the context of graph transformations, when we have two graphs  $G$  and  $H$ , along with a transformation rule  $p$ , we can apply this rule to graph  $G$  at match  $m$ . This application, denoted as  $G \xrightarrow[p, m]{} H$ , results in graph  $H$ . The match, represented as  $m : L \hookrightarrow G$ , is an injective graph morphism, and  $L$  contains all the nodes and edges of  $p$  that remain intact and are not deleted during the transformation.

As outlined in section 3.1, where we elucidated our utilization of conditional random fields (CRF) as a graph-based metamodeling and compositional approach for annotating USs, each US is meticulously structured and annotated in the form of a graph. Subsequently, we will apply transformation rules to these CRF-generated graphs to modelling graph transformation.

To accomplish this objective, we have harnessed the capabilities of established lexical resources such as VerbNet. This utilization of VerbNet enables us to categorize actions (which are verbs) extracted from the US into four distinct categories, namely: “create”, “delete”, “preserve”, “forbid”. These categories serve as essential components of transformation rules that articulate precise changes within the graph-based representation.

## **Henshin: A Tools for In-Place EMF Model Transformations**

The Eclipse Modelling Framework (EMF) provides modelling and code generation facilities for Java applications based on structured data models. Henshin is a language and associated tool set for in-place transformations of EMF models.

The Henshin transformation language uses pattern-based rules on the lowest level, which can be structured into nested transformation units with well-defined operational semantics. So-called amalgamation units are a special type of transformation units that provide a forall-operator for pattern replacement. For all of these concepts, Henshin offers a visual syntax, sophisticated editing functionalities, execution and analysis tools. The Henshin transformation language has its roots in attributed graph transformations, which offer a formal foundation for validation of EMF model transformations [2].

## **Graph Types**

Graph transformation-based approaches, essentially define model transformations using rules consisting of a pre-condition graph, called the left-hand side (LHS), and a post-condition graph, called the right-hand side (RHS) of the rule. Informally, the execution of a model transformation requires that a matching of objects in the model (host graph) to the nodes and edges in the LHS is found, and these matched objects are changed in such a way that the nodes and edges of the RHS match these objects [37].

The performance of graph transformation-based model transformations is mainly determined by the efficiency of the match finding of the LHS. Consequently, model transformation languages offer different options to add constraints to the LHS of model transformations to improve the performance of the matching [37]. To be efficient, graph transformation tools usually employ heuristics such as search plans to provide good performance (e.g. [38]).

## **Structure and Application of Rules**

The Henshin transformation language is defined by means of a metamodel. The Henshin metamodel is closely aligned to the underlying formal model of double pushout (DPO) graph transformations [37]. Thus, rules consist of a left-hand side and a right-hand side graph as instances of the *Graph* class. Rules further contain node mappings between the LHS and the RHS which are omitted here for better readability. Graphs consist of a set of Nodes and a set of Edges. Nodes can additionally contain a set of Attributes. These three kinds of model elements are typed by their corresponding concepts in the Ecore metamodel of EMF.

## Application Conditions

To conveniently determine where a specified rule should be applied, application conditions can be defined. An important subset of application conditions is negative application conditions (NACs) which specify the non-existence of model patterns in certain contexts. In the Henshin transformation model, graphs can be annotated with application conditions using a *Formula*. This formula is either a logical expression or an application condition, which is an extension of the original graph structure by additional nodes and edges. A rule can be applied to a host graph only if all application conditions are fulfilled [2].

## Attribute and Parameters

Nodes may also include a set of Attributes. Rules inherit from Units and can thus include various Parameters. A common use of parameters is to transmit an Attribute value (such as a name) from a node to be matched in the rule. To restrict the application of a rule, the metamodel encompasses concepts for representing nested graph conditions [14] as well as attribute conditions.

## State Space Exploration

Henshin support in-place model transformation, Arendt et al. have developed a state space generation tool, which allow to simulating all possible executions of a transformation for a given input model, and to apply model checking, similar to the GROOVE [18] tool. Henshin can generate finite as well as large state space exploration. Regarding generation and analysis of large state space, the tool's ability to utilize parallel algorithms, taking advantage of modern multi-core processors, which enables the handling of state spaces with millions of states.

## Analyzing Conflicts and Dependencies

The elements that comprise the system under construction interact with each other, establishing dependencies among them [18]. In Figure 10, *element A* requires *element B*, generating a dependency between them. Such dependencies are naturally inherited by the USs ( $US_i$  cannot be implemented until  $US_j$  is implemented).

Therefore, the natural dependencies between USs should be accepted as inevitable. In fact, only a fifth of the requirements can be considered with no dependencies [9]. The existence of dependencies between USs makes it necessary to have some implemented before others [9],[13],[25]. If the order of USs implementation does not consider these dependencies, it may have a large number of preventable refactorings, increasing the total cost of the project needlessly. Identifying beforehand the dependencies increases the ability to effectively deal with changes.

Hence, light systematic mechanisms are needed to help identify dependencies between USs [12]. The critical pair analysis (CPA) for graph rewriting [15] has been adapted to rule-based model transformation, *e.g.* to find conflicting functional requirements

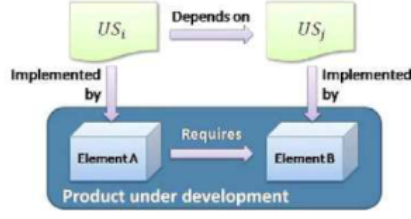


Figure 10: Inherited dependencies by user stories[12]

for software systems [16], or to analyses potential causal dependencies between model refactorings [27], which helps to make informed decisions about the most appropriate refactoring to apply next. The CPA reports two different forms of potential causal dependencies, called conflicts and dependencies [7]. The application of a rule  $r_1$  is in conflict with the application of a rule  $r_2$  if

- $r_1$  deletes a model element used by the application of  $r_2$  (**delete/use**), or
- $r_1$  produces a model element that  $r_2$  forbids (**produce/forbid**), or
- $r_1$  changes an attribute value used by  $r_2$  (**change/use**)<sup>5</sup>.

### Different between Model Checking and Conflict and Dependency Analysis

In this subsection, we shall delineate two distinct analytical methodologies, specifically model checking and Conflict and Dependency Analysis. Their respective purposes are delineated in Table 10, which serves to elucidate their appropriateness for modelling USs.

Aspect	Model Checking for User Stories	Conflict and Dependency Analysis for User Stories
Purpose	Verify user story properties and system behavior	Understand dependencies and interactions between user stories
Method	Large state spaces exploration	Rule-based model transformation
Automated vs. Manual	Automated	Automated
Scope	Ensuring user stories meet specified requirements and system behavior	Understanding how user stories relate to each other, managing dependencies
Use Cases	Ensuring user story correctness and system behavior	Agile development, impact analysis, and managing user story dependencies
Result	Verification of user story properties (e.g., acceptance criteria)	Identification of user story dependencies, potential conflicts, and their impact on the development process

Table 10: Comparative analysis between model checking and conflict and dependency methods

**Example 3.3.** Now, we exemplify conflicts and dependencies within Henshin using two US namely  $US_1$ : “As an administrator, I can add a new person to the database” and  $US_2$ : “As a visitor, I can view a person’s profile”. Figure 11 delineates the class model LDAP (Lightweight Directory Access Protocol). In Figure 12, the defined rules in Henshin, specifically the rule `view-profile` linked to  $US_2$ , and `add-person-profile` corresponding to

<sup>5</sup>Dependencies between rule applications can be characterized analogously.

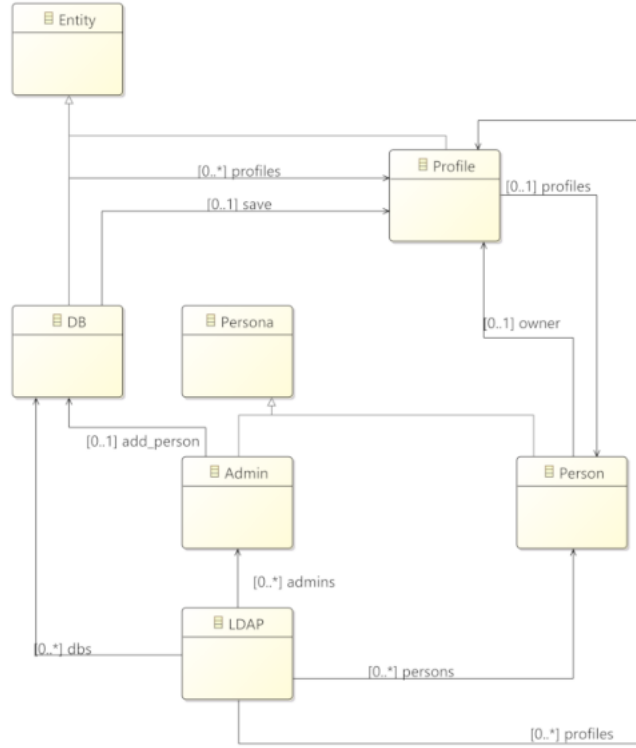


Figure 11: Henshin Class Model LDAP

$US_1$ , are depicted. The representation uses black to signify object preservation and green for new objects. In addition, Figure 13 (CDA result) shows the dependencies between  $US_2$  and  $US_1$  as “Create dependency”, which highlights that Profile node must first be created by  $US_1$  in order to be used in  $US_2$ . Last but not least, a special instance graph is not required in Henshin.

**Example 3.4.** Looking at the  $US$ s mentioned in the example 2.1,  $US_1$ : “As a user, I am able to edit any landmark.” and  $US_2$ : “As a user, I am able to delete only the landmarks that I added.”. First, we minimize  $US_1$  and divided it into three  $US$ s as follows:

- $US_{1a}$ : “As a user, I am able to add any landmark.”
- $US_{1b}$ : “As a user, I am able to modify any landmark.”
- $US_{1c}$ : “As a user, I am able to delete any landmark.”

Figure 14 shows the class model “Map” while figure 15 shows the defined rules in Henshin, with each rule corresponding to a user story.

In this example, we assume that a user only performs one action at a time. If  $US_{1c}$  is translated into a rule and then CDA (Conflict and Dependency Analysis) is applied (Figure 16), Henshin would find a “Delete-Delete” conflict between two “Actions (verbs)”

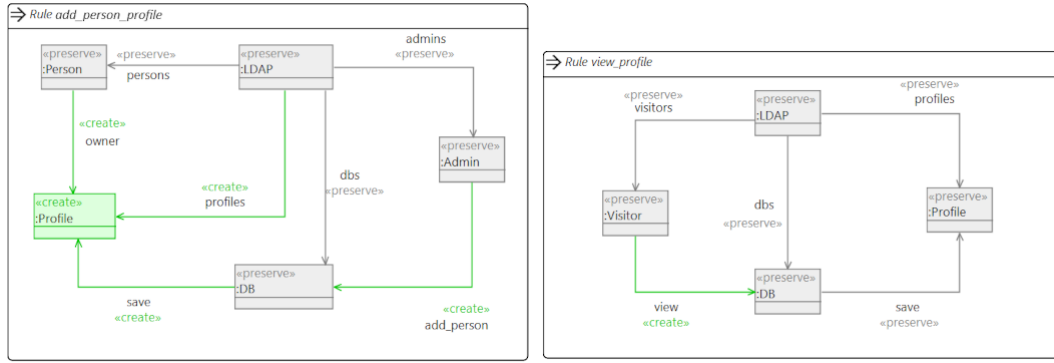


Figure 12: Illustrated rules in Henshin: view\_profile rule related to  $US_2$  and add\_person related to  $US_1$




Figure 13: Henshin CDA result visualises dependencies between user stories

in  $US_{1c}$  and  $US_2$  where two users are allowed to delete the same landmark. This conflict can be avoided if  $US_{1c}$  is replaced with  $US_2$ , as two users are then no longer allowed to delete the same landmark.

Figure 16 shows the conflicts and dependencies between two rules. For Instance, there is a “Create-Delete” conflict between  $US_{1b}$  and  $US_2$ . If the specific landmark are deleted,  $US_{1b}$  cannot modify that landmark anymore.

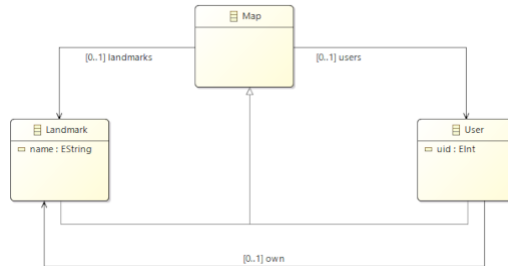


Figure 14: Henshin Class Model Map

## CPA Tool

The provided CPA extension of Henshin can be used in two different ways: Its application programming interface (API) can be used to integrate the CPA into other tools and a

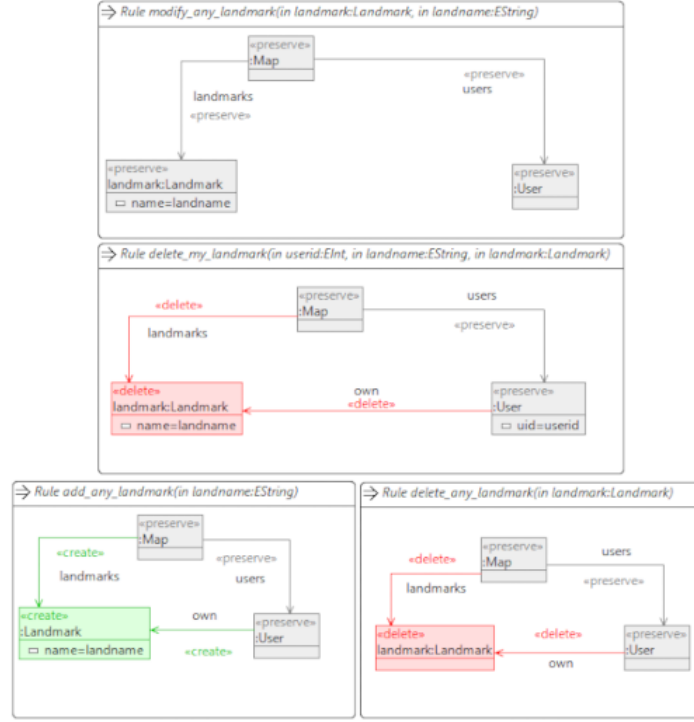


Figure 15: Illustrated rules in Henshin: add\_any\_landmark rule related to  $US_1a$ , modify\_any\_landmark rule related to  $US_1b$ , delete\_any\_landmark rule related to  $US_1c$  and delete\_my\_landmark rule related to  $US_2$

user interface (UI) is provided supporting domain experts in developing rules by using the CPA interactively [27].

After invoking the analysis, the rule set and the kind of critical pairs to be analyzed have to be specified. Furthermore, options can be customized to stop the calculation after finding a first critical pair, to ignore critical pairs of the same rules, etc. The resulting list of critical pairs is shown and ordered along rule pairs.

## Conclusion

It is notable that Henshin's critical pair analysis (CPA) remains agnostic to the specifics of instance graphs. Consequently, model checking in Henshin merely requires the set of rules. In the Henshin approach, instance graphs are not explicitly selected; instead, only rule pairs are analysed, considering conflicts and dependencies.

Since Henshin enables the specification of constraints and conditions within rules, which can be useful for enforcing and verifying US requirements to ensure that constraints are met.

Moreover, a compelling factor in favor of Henshin is the inherent support of a versatile *application programming interface* (API) by the CPA extension, facilitating seamless

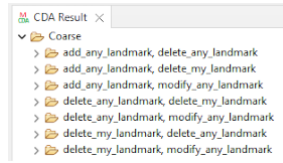


Figure 16: Henshin CDA result visualises conflicts and dependencies between user stories

integration of CPA functionality into various tools, including Java-based platforms.

## 4 Analysing Redundancy

USs are a fundamental component of agile software development. They provide concise and clear descriptions of the software functionality from the end user’s perspective. These stories guide the development process and ensure that the software meets the actual needs of the users.

However, as the project backlog grows, they often become overloaded with redundant USs that can obscure project priorities, waste resources and complicate maintenance. Analysing the redundancy within these USs is key to maintaining clarity and efficiency in the development process.

The main goal of this analysis is to streamline the software development workflow by identifying redundancies in the USs within a project’s backlog syntactically.

By identifying and consolidating overlapping functionalities, companies can avoid redundant work, streamline development work and optimise testing processes. This strategic approach not only shortens project timelines but also improves the clarity and coherence of project documentation, making it easier for team members to navigate and manage project requirements.

In section 4.1 we present the requirements and functional needs that are used as input for the design phase to fulfil the requirements. In section 4.2 we explain the design decisions of the workflow shown in Figure 17 and explain how the architecture is structured.

In section 5.3 follows the implementation to show how the components and their classes look in relation to Figure 18. In Section 5.4 we show what and how far we tested it. Finally, we apply our approach to 19 datasets of backlogs annotated with the Doccano tool <sup>6</sup>. In Section 5.5 we analyse the results and in Section 5.6 we draw a conclusion.

### 4.1 Requirements

In order to accomplish the analysis of redundancy in USs we try to address following functional requirements:

- As a user, I want to perform syntactic analysis on user stories within a specified project backlog, so that I can identify and address redundancies effectively.

<sup>6</sup><https://github.com/ace-design/nlp-stories>



- As a User, I want a report of user story pairs that contain identical syntactic clauses in both the main and benefit parts, so that I can modify them as needed.
- As a User, I want to apply a filter to the redundancy report to exclusively display US-pairs, which have at least one clauses as *Targets* with the terms "Action" (as a verb) and "Entity" (as a noun), so that I can efficiently reduce the number of potential redundant pairs.
- As a user, I want to mark found redundancy clauses as Triggers with a hash symbol (#) and show those that have a redundancy in "Persona" (as a noun) and "Action" (as a verb) entries, so that I can better see if the persona in is also recognised as a redundancy.
- As a user, I want to mark founded redundancy clauses as *Contains* with a hash symbol (#) and show those that contain two "Entity"(as a noun), so that I can better see whether the contained entity is also recognised as a redundancy.
- As a user, I would like to have a redundancy report that shows founded US texts in US-pairs and adds a hash symbol (#) at the beginning and end of the founded words as a marker, so that I can better see which words are redundant in US-pairs.
- As a user, I want to see how many redundancy clauses were founded in main and benefit parts of each US-pair, so that I can aggregate each founded redundancy US-pair for further statistical purposes on that basis.
- As a user, I want a table at the top of the redundancy report that lists the US-pairs and the number of redundancy clauses contained in each pair, so that I can quickly see all the US-pairs founded and the number of redundancy clauses.
- As a user, I want to know whether the redundancy clauses belong to the main or benefit part of the US, so that I can use it for further statistical purposes.
- As a user, I want to know if a pair of US is partially or fully redundant, so that I can delete or modify them.

To judge the operation of a system, we define following non-functional requirements:

- Testability: The system should support automated test procedures to ensure that syntactic analysis and redundancy detection work correctly. It should include comprehensive test cases covering different scenarios, including edge cases, to verify the accuracy and reliability of redundancy detection.
- Documentation: The system should include detailed documentation covering all aspects of functionality, setup. User manuals, API documentation and troubleshooting guides should be provided.
- Performance: The system should perform the redundancy analysis within a reasonable time frame, even with large project backlogs. It should be optimised to process large amounts of data without significant performance degradation.

- Scalability: The system should be scalable to handle an increasing the number of USs and larger project backlogs.

## 4.2 Design

This section describes the workflow and architectural considerations underlying the framework.

### Design Overview

To address the redundancy detection requirements specified in Section 4.1, our system initiates with backlogs annotated with Doccano tool<sup>7</sup> generated by Mosser et al. as the primary input[4]. These annotated USs are used to generate graph transformation rules for each US in the backlog using Henshin tool.

Subsequently, these rules serve as inputs for the Henshin Conflict and Dependency Analysis (CDA) tool [27], which automates the identification of potentially redundant US pairs. The output from the CDA tool is then utilized to create a report that compiles information on these potentially redundant pairs. This report, in turn, becomes the input for the evaluation process, which outputs statistical data concerning redundancy among USs.

Figure 17 illustrates how each step in this sequence is interconnected, with the output of one step feeding directly into the next. This diagram effectively demonstrates the toolchain and process workflow, highlighting how each tool transforms artefacts and contributes to the overall objective of redundancy detection.

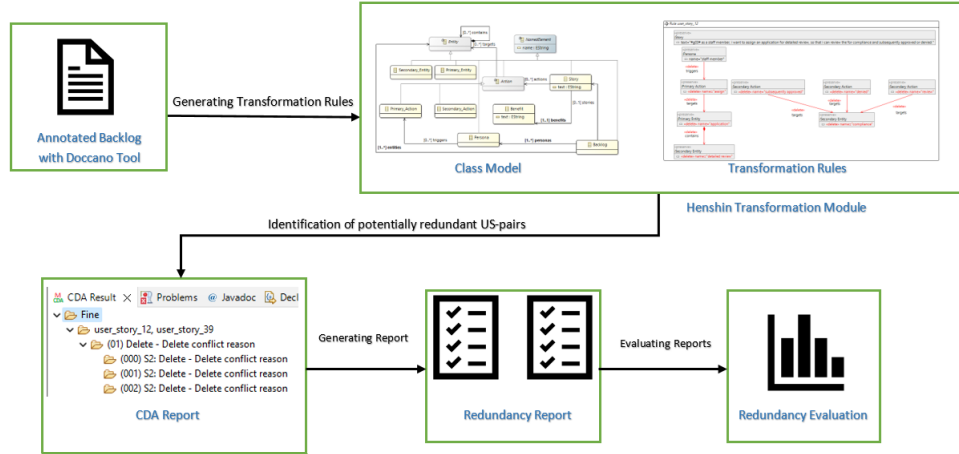


Figure 17: Step-by-step visualisation of the tool chain and its inputs and outputs

<sup>7</sup><https://github.com/ace-design/nlp-stories>

**US labelling in JSON files** As the annotated USs in the JSON files do not contain identifiers, a customised Python script, *nummerise-us.py*, is used to assign a unique identifier to each US, which is stored in a JSON object named "*US\_Nr*"<sup>8</sup>. This addition improves the system's ability to distinguish and process individual USs within the analytical pipeline.

**Creation of an Ecore meta model** The creation of an Ecore meta-model is required to generate rules in Henshin. The constructed meta-model, is based on the conceptual meta-model outlined in Figure 6 and ensures consistency with the JSON-structured data. This correspondence between the meta-model and the JSON representation underpins the rule generation and transformation processes of the system.

**Rule creation process** The transition from identified USs to implementable transformation rules within Henshin is facilitated by the package *org.eclipse.emf.henshin.model.compact*. The class *RuleCreator* within the package *org.henshin.backlog.code.rule* is important in this process as it uses different classes to instantiate transformation rules, nodes, edges and attributes. These components are annotated with actions such as *Delete*, *Create* or *Preserve*, which are necessary for the subsequent application of CDA tool to recognise redundant US-pairs. This methodological approach improves the system's ability to detect redundancies and thus optimises the efficiency of the residue analysis process.

**Conflict and Dependency Analysis (CDA)** After the creation of transformation rules and the creation of the corresponding Henshin file by the *RuleCreator* class, the system is able to perform a conflict and dependency analysis (CDA) to identify potential redundancy pairs.

**Extraction of text reports** The creation of a text report is a crucial step in consolidating the results of the conflict and dependency analysis (CDA), which aims to highlight essential information such as the identification of potentially redundant US-pairs, the enumeration of redundancy clauses, the categorisation of these clauses within the main or benefit parts of the USs and a tabulation of potentially redundant pairs alongside the total number of redundancy clauses.

**Evaluating the reports** After creating the reports, we are now able to evaluate the level of redundancy between US-pairs based on JSON reports.

The evaluation process involves a detailed examination of elements such as triggers, targets, and contains within the USs, comparing them to identify exact matches or significant overlaps that could indicate redundancy.

---

<sup>8</sup>[https://github.com/amirrabieyannejad/Redundancy\\_Analysis/tree/main/Script/numberise-us](https://github.com/amirrabieyannejad/Redundancy_Analysis/tree/main/Script/numberise-us)

## Software Architecture

In this section, we present the basic structures of our workflow and the discipline of creating such structures. Each structure comprises software elements, relations among them, and properties of both.

- Annotated USs with Doccano Tool<sup>9</sup>: Mosser et al. used publicly available requirements from Dalpiaz et al.[11] consisting of 19 product backlogs and 1,458 USs. The dataset is a raw archive of 19 text files, each containing one US per line. As there were no public expert-based annotations, Mosser et al. manually annotated the dataset using the Doccano tool for *Named Entity Recognition*. Labels included persona, action, entity, benefit part and relations such as triggers, targets, and contains based on their domain meta-model. As artefact we receive a graph-based model with JSON format, which represents the refined and annotated dataset for the recognition of *entities*, *actions*, *personas* and *benefits* of USs [30].
- Eclipse as IDE<sup>10</sup>: Eclipse is an integrated development environment (IDE) used in computer programming. It contains a base work workspace and an extensible plug-in system for customizing the environment. We chose this IDE because it offers the Henshin tool specifically for model-based development.
- Eclipse Modelling Project<sup>11</sup>: It focuses on the evolution and promotion of model-based development technologies within the Eclipse community by providing a unified set of modelling frameworks, tooling, and standards implementations.
- Eclipse Modelling Framework (EMF)<sup>12</sup>: The EMF project is a modeling framework and code generation facility for building tools and other applications based on a structured data model. From a model specification described in XMI, EMF provides tools and runtime support to produce a set of Java classes for the model, along with a set of adapter classes that enable viewing and command-based editing of the model, and a basic editor.
- Henshin<sup>13</sup>: Henshin is an in-place model transformation language for the Eclipse Modelling Framework (EMF). It supports direct transformations of EMF model instances (endogenous transformations), as well as generating instances of a target language from given instances of a source language (exogenous transformations).

Because Henshin enables the specification of restrictions and conditions within rules, we use it to enforce and verify US requirements to ensure that the restrictions are met.

---

<sup>9</sup><https://github.com/doccano/doccano>

<sup>10</sup><https://eclipseide.org/>

<sup>11</sup><https://eclipse.dev/modeling/>

<sup>12</sup><https://eclipse.dev/modeling/emf/>

<sup>13</sup><https://wiki.eclipse.org/Henshin>

- Henshin API: It provides the specification and execution of transformation modules, units and rules. This API is beneficial due to the dynamic creation and modification of transformation modules as part of an automated tool chain<sup>14</sup>.
- RuleCreator Class: This class developed within the *org.henshin.backlog.code.rule* package, serves as an integral component of our software architecture, leveraging the Henshin API to automate the process of transformation rule creation based on dynamic JSON input. This class facilitates the programmable generation of graph transformation rules. It operates by reading JSON files, which specify USs and their associated actions, entities, and relationships, then systematically constructs corresponding Henshin modules, rules, nodes, and their attributes.

the RuleCreator class effectively bridges the gap between high-level requirements specified in JSON and the low-level execution capabilities of the Henshin, ensuring that USs translated into executable transformation rules that reflect the specified software behaviour. This translation process is crucial for maintaining consistency and traceability across the software development lifecycle, from requirements specification to implementation.

- Henshin’s CDA Feature<sup>15</sup>: Henshin’s conflict and dependency analysis (CDA) feature enables the detection of potential conflicts and dependencies of a set of rules.

After the rules and the corresponding Henshin file have been created by the RuleCreator class as artefact, we are now able to pass them to the conflict and dependency analysis (CDA) to find potential redundancy pairs.

Since the analysis of conflicts and dependencies related to the *attribute* is not yet considered in the CDA API, we decided to use the user interface (UI) of the CDA extension, which supports analysis of conflict and dependencies of rules through the interactive use of CDA.

- ReportExtractor Class: The class from the *org.henshin.backlog.code.report* package is used in our software architecture to extract and format reports from the CDA-generated *Minimal-Model.ECore* that contain all information about redundant US-pairs such as redundant elements with their name and type. It uses classes from the *org.eclipse.emf.ecore* package to handle EMF (Eclipse Modelling Framework) resources that support the management and manipulation of *Minimal-Model.ECore* data in a structured format.

In operation, the ReportExtractor class reads *minimal-model.ecore* files containing detailed information about redundant US-pairs. It then processes this data to generate reports in both text and JSON formats, aiding in the systematic analysis of potential redundancies within the USs. This is facilitated through methods that dynamically read and interpret the JSON data, extracting key information such as actions, entities, and their interactions.

---

<sup>14</sup>[https://wiki.eclipse.org/Henshin/Compact\\_API](https://wiki.eclipse.org/Henshin/Compact_API)

<sup>15</sup>[https://wiki.eclipse.org/Henshin/Conflict\\_and\\_Dependency\\_Analysis](https://wiki.eclipse.org/Henshin/Conflict_and_Dependency_Analysis)

- **Evaluation Class:** The class is part of the *org.henshin.backlog.code.evaluation* package, serves a critical function within our software architecture, focusing on the analysis and determination of redundancy between USs based on specified criteria. This class utilizes JSON processing to assess the overlap and redundancy between elements of USs, such as triggers, targets, and contains, which are vital for identifying potential redundancies in the USs.

Key functionalities of this class include reading and interpreting JSON data, where it extracts detailed elements related to USs and evaluates them against redundancy criteria defined in its methods. The class's method *evaluateRedundancyCriteria* is particularly central, as it processes the JSON objects representing USs to determine if they are fully or partially redundant based on the presence and matching of various JSON array elements like triggers, targets, and contains in the main and benefit parts of the USs.

Figure 18 shows the architectural composition, highlighting the integral components and their user interface and artefacts.

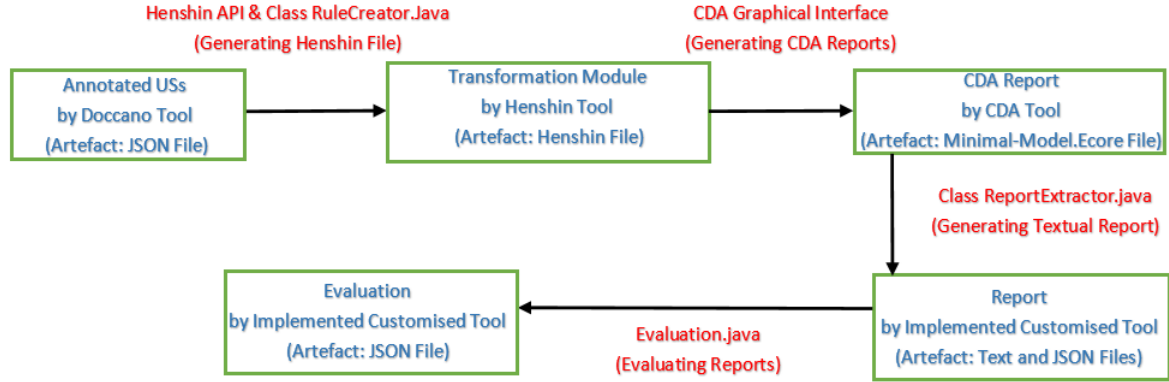


Figure 18: Design phases

Regarding redundancy, some definitions are clarified:

**Definition 4.1 (Main and Benefit Parts in User Story).** *A user story (US) is divided into two distinct parts that collectively describe what the user wants, why they want it, and how it will benefit them. These are:*

- *The main part, which is essential as it clearly and concisely summarises the persona, the intended functionality and the resources required to perform the action. This part usually has follow the format: "As a [persona], I want [what]".*

*Here, the persona helps contextualise the requirement by linking it to a user type, which promotes understanding and empathy. The intended functionality describes the action that the persona wants to perform or the function they need, providing a clear statement of the requirement.*

*Specifying the resources required to perform the action helps with planning and resource allocation and ensures that the development team is aware of the tools, technologies and time required.*

- *The benefit part, which formulates the potential benefit for the end user and typically begins with the phrase “so that”. This part of the US is used for justifying the need for a feature by explaining the value or improvement it brings to the user’s experience. It connects the functionality directly to user satisfaction, efficiency, or productivity gains, making it easier for the development team to prioritize features based on their impact.*

*It is worth noting that sometimes the benefit part may not exist in the structure of USs. In such cases, the main part can stand alone.*

**Definition 4.2 (Clause).** *In this context, a clause is constructed as a pair of words, each pair being linked by a set of predefined relational constructs. These constructs, which are central to the contextual structuring of USs, are described below:*

- *Triggers: A relationship between a persona and an action that includes the invocation of the action by the persona within the narrative of a US.*
- *Targets: A relationship between an action and an entity means that the action influences the entity in question.*
- *Contains: A relation between two entities, indicating that one entity contains another one, in which one entity merges into or is enclosed by another.*

*Including the specified clauses in the analysis framework ensures that the words identified in potentially redundant US-pairs are linked by one of the relational constructs outlined: Triggers, Targets, or Contains.*

*This methodological approach supports the identification of redundancy not only on the basis of lexical similarity, but through the contextual relationships that determine the interactions within the US narratives.*

**Example 4.1.** *When evaluating the textual similarities between two USs, consider the following pair:*

*user\_story\_01: “As a Staff member, I want to Manage Ordinances, so that I can maintain accurate ordinance information in the System.”*

*user\_story\_02: “As a Staff member, I want to Manage Affidavits, so that I can ensure compliance with the requirements prior to the hearing.”*

*Upon comparing these two user stories, we identify shared phrases: “Staff member” and “Manage.” These common elements indicate that both user stories involve the same persona (“Staff member”) engaged in a similar type of action (“Manage”). However, the focus of their management tasks differs significantly, with one managing “Ordinances” and the other “Affidavits.”*

This distinction in the resources being managed suggests that while there are textual overlaps and commonalities in persona and action, the user stories are not duplicates, as they address different aspects of the staff member’s responsibilities and goals within the organization.

**Definition 4.3 (Redundancy).** Redundancy refers to situations where all phrases of USs duplicate or largely overlap with others. This is the case when only a part (main or benefit) or entire USs are syntactically identical, meaning that some or all phrases and their orderings match perfectly between two USs.

*Notation.* Lowercase identifiers refer to single elements, and uppercase identifiers denote sets. A user story  $us$  is a 2-tuple  $us = \langle m, b \rangle$  where:

- A main  $m$  is a 6-tuple  $m = \langle p, A, E, Tr, Ta, Co \rangle$  which  $p$  is the persona,  $A = \{a_1, a_2, \dots\}$  is a set of actions,  $E = \{e_1, e_2, \dots\}$  is a set of entities, trigger references  $Tr = \{(p_1, a_1), (p_2, a_2), \dots\}$  is a set of pairs of persona and action, target references  $Ta = \{(a_1, e_1), (a_2, e_2), \dots\}$  is a set of pairs of action and entity, and contain references  $Co = \{(e_1, e_2), (e_*, e_*), \dots\}$  is a set of pairs of entities.
- A benefit  $b$  is a 4-tuple  $b = \langle A, E, Ta, Co \rangle$  where  $A = \{a_1, a_2, \dots\}$  is a set of actions,  $E = \{e_1, e_2, \dots\}$  is a set of entities,  $Ta = \{(a_1, e_1), (a_2, e_2), \dots\}$  is a set of pairs of action and entity,  $Co = \{(e_1, e_2), (e_*, e_*), \dots\}$  is a set of pairs of entities.

To denote that a syntactic operator, we add the subscript “syn”; for instance,  $=_{syn}$  is syntactic equivalence which introduced by Lucassen et al. [26].

In the following, let  $us_1 = \langle m_1, b_1 \rangle$  which  $m_1 = \langle p_1, a_1, e_1, tr_1, ta_1, co_1 \rangle$  and  $b_1 = \langle a_1, e_1, ta_1, co_1 \rangle$  as well as  $us_2 = \langle m_2, b_2 \rangle$  which  $m_2 = \langle p_2, a_2, e_2, tr_2, ta_2, co_2 \rangle$  and  $b_2 = \langle a_2, e_2, ta_2, co_2 \rangle$ .

The entity  $e_1$  is an exact redundant of entity  $e_2$ , when the entities are identical. Formally,

$$isRedundant(e_1, e_2) \leftrightarrow e_1 =_{syn} e_2$$

The action  $a_1$  is an exact redundant of action  $a_2$ , when the actions are identical. Formally,

$$isRedundant(a_1, a_2) \leftrightarrow a_1 =_{syn} a_2$$

The trigger reference  $tr_1$  is an exact redundant of trigger  $tr_2$ , if they run between redundant personas  $p_1$  and  $p_2$  and redundant actions  $a_1$  and  $a_2$ . Formally,

$$isRedundant((p_1, a_1), (p_2, a_2)) \leftrightarrow tr_1 =_{syn} tr_2$$

The target reference  $ta_1$  is an exact redundant of target  $ta_2$ , if they run between redundant actions  $a_1$  and  $a_2$  and redundant entities  $e_1$  and  $e_2$ . Formally,

$$isRedundant((a_1, e_1), (a_2, e_2)) \leftrightarrow ta_1 =_{syn} ta_2$$

The contain reference  $co_1$  is an exact redundant of contain  $co_2$ , if they start at redundant



entities  $e_1$  and  $e_2$  and end in redundant entities  $e_3$  and  $e_4$ . Formally,  
 $isRedundant((e_1, e_3), (e_2, e_4)) \leftrightarrow co_1 =_{syn} co_2$

To comprehensively assess redundancy, it is important to consider not only the textual content, but also the functional and contextual relevance of each phrase within the USs. By analysing triggers, targets and contains relationships, we can uncover redundancies that may not be immediately apparent through a simple text comparison.

**Definition 4.4 (Full Redundancy).** A US-pair are fully redundant in their main parts if

- there are redundant target references  $Ta_2$  in  $m_2$  for all target references  $Ta_1$  in  $m_1$ , so that  $Ta_1$  and  $Ta_2$  are redundant, and vice versa, and
- there are redundant trigger references  $Tr_2$  in  $m_2$  for all trigger references  $Tr_1$  in  $m_1$ , so that  $Tr_1$  and  $Tr_2$  are redundant, and vice versa, and
- there are redundant contain references  $Co_2$  in  $m_2$  for all contain references  $Co_1$  in  $m_1$ , so that  $Co_1$  and  $Co_2$  are redundant, and vice versa.

A US-pair are fully redundant in their benefit parts if

- there are redundant target references  $Ta_2$  in  $b_2$  for all target references  $Ta_1$  in  $b_1$ , so that  $Ta_1$  and  $Ta_2$  are redundant, and vice versa, and
- there are redundant contain references  $Co_2$  in  $b_2$  for all contain references  $Co_1$  in  $b_1$ , so that  $Co_1$  and  $Co_2$  are redundant, and vice versa.

A US-pair was categorised as "full redundancy" in the main/benefit part if all occurring clauses in the main/benefit part consisting of triggers (for the main part only), targets and contains were syntactically identical.

This means that in each pair, the wording, order and structure of the clauses relating to the triggers and targets must be identical to fall into this category. The check also extends to the "contain" elements, if these are present, to ensure that these also match perfectly and without deviations.

Full redundancy in the main part means that the redundant stories do not provide additional information and can be consolidated or eliminated without compromising the completeness or operational integrity of the system specifications.

On the other hand, having this level of redundancy in the benefit part means that USs achieve the same goal; they can be categorised in the same group. This means that if the end results or benefits described by the USs are identical, regardless of the different actions/entities or triggers that lead to these results, the USs effectively serve the same purpose within the system.

**Example 4.2.** For example, the following US-pair is identified as “Full Redundancy” in the main part:

*user\_story\_01: “#g14# as a #publisher#, i want to #publish# a #dataset#, so that i can view just the dataset with a few people.”*

*user\_story\_02: “#g14# as a #publisher#, i want to #publish# a #dataset#, so that i can share the dataset publicly with everyone.”*

All existing clauses associated with the main elements in this scenario - in particular the trigger (where “Publisher” is the persona and “Publish” is the action) and the targets (where “Publish” is the action and “Dataset” is the entity) - are exactly the same in the main parts of the USs. This complete similarity shows that there is “full redundancy” in the main parts of these USs.

**Example 4.3.** Following US-pair is identified as “Full Redundancy” in “Benefit” part:

*user\_story\_02: #g05# as a data publishing user, I want to be able to edit the model of data I have already imported, so that I can #fix# #bugs# or #make# #enhancements# in the #API# built for my #data#.*

*user\_story\_07: #g05# as a data publishing user, I want to be able to edit the data source of data I have already imported, so that i can #fix# #bugs# or #make# #enhancements# in the #API# built for my #data#.*

As we can see, targets([“fix”, “bugs”], [“make”, enhancements]) and contains([“API”, “enhancements”], [“data”, “API”]) in the benefit part are identical between USs, therefore, we have “Full Redundancy” in the “Benefit” parts.

Last but not least, sometime there are words in the annotated USs that are not labelled as a reference (trigger, target or contain) by the Doccano tool at all, which leads to a full redundancy being incorrectly recognised instead of a partial.

**Example 4.4.** Considering following US-pair:

*user\_story\_26: #g05# as an #api user#, i want to be able to #understand# if a #user# is an administrator, so that [...].*

*user\_story\_25: #g05# as an #api user#, i want to be able to #understand# if a #user# is a publisher, so that [...].*

In this example, full redundancy is found due to the redundant targets and triggers in the main part, which is not entirely correct. This is because there are some phrases that do not appear as contain or target in any reference, such as: “administrator” (user\_story\_26) and “publisher” (user\_story\_25).

**Definition 4.5 (Partial Redundancy).** A US-pair are partially redundant in their main parts if there is a target reference  $ta_1$  in  $m_1$  and a target reference  $ta_2$  in  $m_2$ , so that  $ta_1$  and  $ta_2$  are redundant.

A US-pair are partially redundant in their benefit parts if there is a target reference  $ta_1$  in  $b_1$  and a target reference  $ta_2$  in  $b_2$ , so that  $ta_1$  and  $ta_2$  are redundant.

Note that in this definition, a US-pair that is fully redundant in the main part (or in the benefit part) is also partially redundant in the main part (or in the benefit part).

Partial redundancy in USs occurs when only certain clauses, such as targets, have significant overlap but are not completely identical. This means that while there are shared aspects such as targets between USs, other clauses such as triggers or contains may not overlap, indicating an incomplete match. Such a scenario indicates that there is substantial, but not fully, a match between the USs.

**Example 4.5.** Following US-pair is identified as “Partial Redundancy” in main part:

*user\_story\_09: #g04# as a #user#, I want to be able to #view# a #map display# of the public recycling bins around my #area#.*

*user\_story\_10: #g04# as a #user#, I want to be able to #view# a #map display# of the special waste drop off sites around my #area#.*

As we can see, there are some redundancy clauses such as Triggers ([“user”, “view”]), Targets ([“view”, “map display”]) and Contains([“map display”, “area”]) between the USs. There are also clauses such as Contains ([“public recycling bins”] vs. [“hazardous waste collection points”]) that are distinct elements justifying the maintaining of separate USs. We therefore assess this as “Partial redundancy” in the “Main part”.

**Example 4.6.** Following US-pair is identified as “Partial Redundancy” in benefit part:

*user\_story\_17: #g03# as a staff member, I want to manage approved proffers, so that I can #ensure# #compliance# with and satisfaction of the proffer in the future.*

*user\_story\_30: #g03# as a staff member, I want to manage affidavits, so that I can #ensure# #compliance# with the requirements prior to the hearing.*

As we can see, there is a redundancy clause as targets ([“ensure”, “compliance”]) between the USs in the benefit part, but there is also a clause as contains ([“proffer”, “satisfaction”] vs [“requirements”, “hearing”]), which leads us to evaluate this as “Partial Redundancy” in the “Benefit” part.

## Design Phases

To provide a comprehensive overview of the design phases, this section explains each step of the process, from initial setup to final evaluation, using practical examples.

### Step 1: Data Preparation

As primary input, we receive a graph-based model generated by the Doccano tool, which represents the refined and annotated dataset for the recognition of *entities*, *actions*, *persons* and *benefits* of USs [4].

The datasets have the JSON format, the structure of which is very important in the Java classes *RuleCreator*, *ReportExtractor*, and *Evaluation*. Therefore, understanding the JSON format provided is needed for the further procedure.

Each JSON file for a backlog dataset contains a JSON-array in which each US entry is defined as a JSON-object. Listing 9 illustrates the format used for the US entry.

---

```
[
{
  "Text": "...",
  "Persona": [ "... " ],
  "Action": {
    "Primary Action": [ "...", ... ],
    "Secondary Action": [ "...", ... ],
  },
  "Entity": {
    "Primary Entity": [ "...", ... ],
    "Secondary Entity": [ "...", ... ] },
  "Benefit": "...",
  "Triggers": [ [ "...", "..." ] ],
  "Targets": [ [ "...", "..." ], ... ],
  "Contains": [ [ "...", "..." ], ... ]
},
...
]
```

---

Listing 1: The JSON format of each US entry in JSON file

---

Mosser et al. have linked each *Persona* to each *Primary Action* as *Trigger* relationships, each *Primary Actions* to each *Primary Entity* as *Target* relationships and each *Primary/Secondary Entity* to each *Primary/Secondary Entity* implying a *Contains* relationship[4].

To interact with the entries in JSON file, we need to distinguish between the entries that are defined as JSON-objects, such as: Text, Action, Entity, Benefit and the entries that are defined as a JSON-array, such as: Persona, Primary/Secondary Action, Primary/Secondary Entity, Triggers, Targets, Contains.

### Identifying USs in JSON-File

Annotated USs in each JSON file have no identifier. To distinguish USs, we use a Python script called *numerise\_us.py*<sup>16</sup>, which receives JSON files as input and adds a JSON object named “US\_Nr” with an identifier as value (e.g. user\_story\_01) to each US and returns the JSON files as output. Listing 10 illustrates the added JSON object “US\_Nr” and its value in the JSON file.

---

```
[
{
  "Text": "...",
  "Persona": [ "... " ],
  "Action": {
```

---

<sup>16</sup>[https://github.com/amirrabieyannejad/Redundancy\\_Analysis/tree/main/Script/numerise\\_us](https://github.com/amirrabieyannejad/Redundancy_Analysis/tree/main/Script/numerise_us)

```

        "Primary Action": [ "...", ... ],
        "Secondary Action": ["..."], ... },
    "Entity": {
        "Primary Entity": [ "...", ... ],
        "Secondary Entity": [ "...", ...] },
    "Benefit": "...",
    "Triggers": [ [ "...", "..." ] ],
    "Targets": [ [ "...", "..." ], ... ],
    "Contains": [ [ "...", "..." ], ... ]
    },
    "US_Nr" : "user_story_01"
    ,
    ...
]

```

---

Listing 2: The JSON format with the additional JSON object "US\_Nr" and its value

---

## Step 2: Creation of Rules

Step 2 of the design involves a central process in which the US data structured in JSON files is transformed into transformation rules using the Henshin API. This involves the creation of an Ecore meta-model that represents the structure of the data we are working with, followed by the generation of Henshin transformation rules using RuleCreator class.

### Creating Ecore Meta-Model

To be able to create rules in Henshin, an Ecore (meta)-model should be available. Ecore is the core (meta)-model at the heart of the EMF (Eclipse Modelling Framework). It enables the formulation of other models by utilising its constructs.

Accordingly, we create an Ecore meta-model as shown in Figure 42, which is inspired by the meta-model shown in Figure 6 and corresponds to the JSON-objects in the JSON-file as follows:

- *Persona* as a class in the meta-model corresponds to the JSON-object "Persona" in the JSON-file.
- *Entity* as an abstract class, from which *Primary/Secondary Entity* inherits as a class in the meta-model, corresponds to the JSON-object "Entity", which contains two JSON-arrays, namely "Secondary/Primary Entity" in the JSON-file.
- *Action* as an abstract class and *Primary/Secondary Action* as an inherited class in the meta-model correspond to the JSON-object "Action", which contains two JSON-arrays, namely "Secondary/Primary Action" in the JSON-file.
- *Benefit* as a class in the meta-model, which also has an attribute called "text" that corresponds to the JSON-object "Benefit" in the JSON-file.

- *Story* as a class in the meta-model that contains text from US, which also has an attribute called “text” that corresponds to the JSON-object “Text” in the JSON-file.
- Abstract class *NamedElement* has attribute *name*, which Primary/Secondary Action/Entity inherit from it, which corresponds to the value of *Primary/Secondary Action/Entity* in JSON-file.
- *Edge* with the name *triggers* between Persona and Primary Action in the meta-model, which corresponds to the JSON-array “Triggers”, where each JSON-array in it contains a pair, the first element corresponding to the *Persona* and the second to the *Primary Action*.
- *Edge* named *targets* between Primary/Secondary Action and Primary/Secondary Entity in the meta-model, which corresponds to the JSON-array “Targets”, where each JSON-array has a pair, the first element corresponding to “Primary/Secondary Action” and the second element corresponding to “Primary/Secondary Entity”.
- *Edge* named *contains* between Primary/Secondary Entity and itself in the meta-model, which corresponds to the JSON-array “Contains”, where each JSON-array in it has a pair where the first element corresponds to “Primary/Secondary Entity” and the second element corresponds to “Primary/Secondary Entity”.

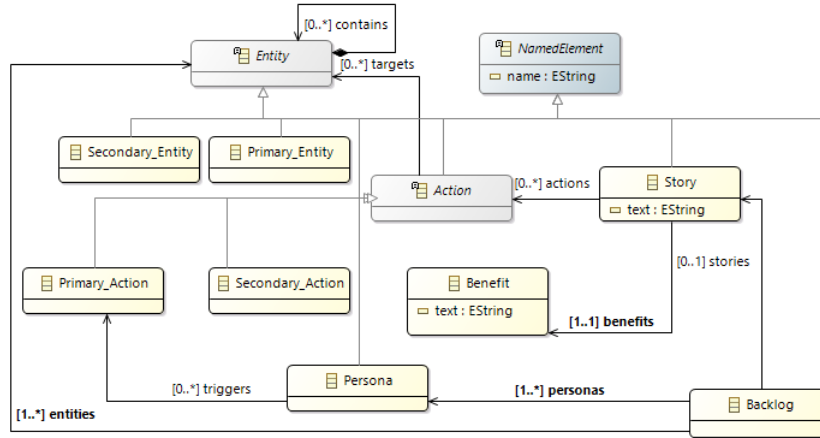


Figure 19: Ecore meta-model inspired by Mosser et al. [30]

## Creating Rules

With the identified USs in the the JSON-file, we generate rules with the Henshin package *org.eclipse.emf.henshin.model.compact*, which is responsible for the creation of *transformation rules* and their *classes*, *attributes*, *edges* and annotates them with *<Delete>*,

`<Create>` or `<Preserve>`, which are vital for the CDA tool to recognise the redundant pairs.

To generating rules we create a package named `org.henshin.backlog.code.rule` and specially the class `RuleCreator` which used following classes<sup>17</sup>:

- `org.eclipse.emf.henshin.model.compact.CModule`: CModule class can import elements from an Ecore file to use them in the transformation process responsible for linking the Ecore meta-model to the Henshin-file to be created.
- `org.eclipse.emf.henshin.model.compact.CRule`: Once we have a CModule, we can specify transformation rules with the CRule class and create them.
- `org.eclipse.emf.henshin.model.compact.CNode`: Now that we have a transformation rule, we want to fill this rule with nodes, edges and attributes. To create a node within a transformation rule, we need the CRule class. To create an edge we need to reference two nodes together. The default action when specifying a node, edge or an attributes is the `<preserve>` action. We can also specify a different action when we create a node or an edge, for example `<delete>` or `<create>`.
- `org.henshin.backlog.code.rule.RuleCreator`: We implement `RuleCreator` class that creates a rule with annotated nodes, edges and attributes based on a JSON-file as input and a Henshin-file containing all rules as output, where each rule and its members(nodes, attributes, edges) correspond to the individual US and their JSON-objects/arrays in the JSON-file.

The most important design decision of this class is the way nodes, attributes and edges are annotated in order to be able to apply conflict and dependency analysis (CDA) for rules stored as a Henshin file.

We decided to annotate the “name” attribute of all Primary/Secondary Actions/Entities and their associated edges including “targets”, “triggers” and “contains” as `<delete>` action.

The main goal is to increase the probability of identifying US-pairs characterised by matching names of *action* nodes and *entity* nodes in conjunction with an edge called *targets*. This congruence serves as a basic criterion for identifying potentially redundant US-pairs and simplifies the process of redundancy detection in the context of US analysis.

**Example 4.7.** Listing 11 shows the JSON format in relation to *user\_story\_12* and Figure 43 shows the application of the `RuleCreator` class in this US, which is a transformation rule where the targets and the associated contains relationships are annotated as a `<Delete>` action and the rest of the nodes and edges are annotated as a `<Preserve>` action.

---

<sup>17</sup>[https://wiki.eclipse.org/Henshin/Compact\\_API](https://wiki.eclipse.org/Henshin/Compact_API)

Text of US is: user\_story\_12: "#G03# As a Staff member, I want to Assign an Application for Detailed Review, so that I can review the for compliance and subsequently approved or denied."

```
{
  "Text": "#G03# As a Staff member, I want to Assign an Application
for Detailed Review, so that I can review the for compliance and
subsequently approved or denied.",
  "Persona": ["Staff member"],
  "Action": {"Primary Action": ["Assign"],
  "Secondary Action": ["subsequently approved", "denied", "review"]},
  "Entity": {"Primary Entity": ["Application"],
  "Secondary Entity": ["compliance", "Detailed Review"]},
  "Benefit": "I can review the for compliance and subsequently
approved or denied",
  "Triggers": [{"Staff member", "Assign"}],
  "Targets": [{"Assign", "Application"}, {"review", "compliance"},
  ["subsequently approved", "compliance"], ["denied", "compliance"]],
  "Contains": [{"Application", "Detailed Review"}],
  "US_Nr": "user_story_12"
},
```

Listing 3: JSON entities Related to user\_story\_12

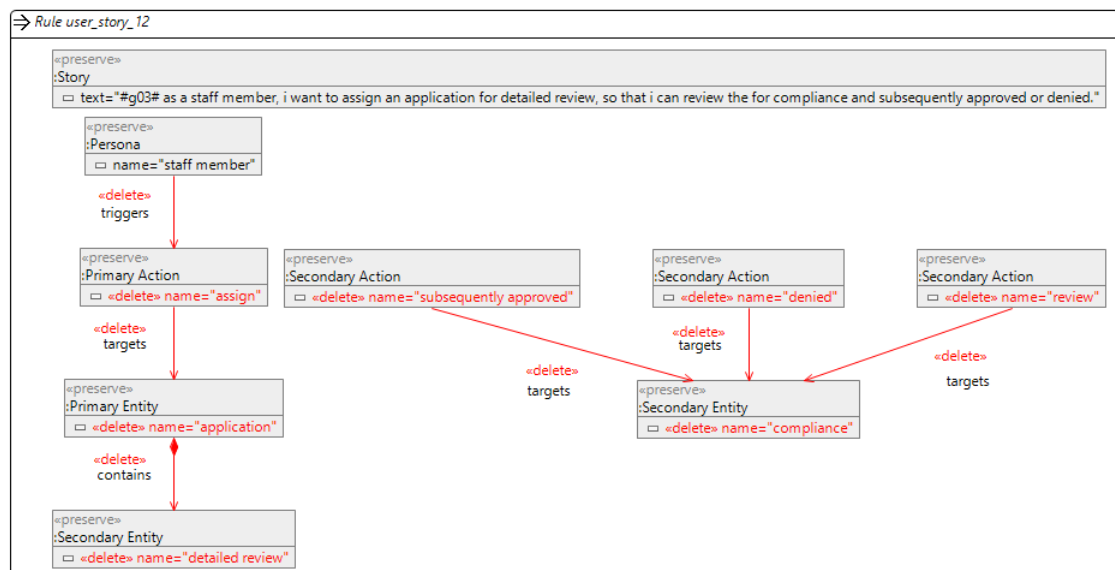


Figure 20: Generated transformation rule related to user\_story\_12 using RuleCreator class

As we can see, the "targets" edges and their direct relationships ("triggers" and "contains", if any) are also annotated as <delete>, which is very important to find redundant elements with the CDA tool.



**Example 4.8.** Listing 12 shows the JSON entities related to user\_story\_39 and Figure 44 shows transformation rule generated by RuleCreator class.

Text of US is: user\_story\_39: ”#G03# As a Plan Review Staff member, I want to Review Plans, so that I can review them for compliance and either approve, or fail or deny the plans and record any conditions, clearances, or corrections needed from the Applicant.”

```
{
  "Text": "#G03# As a Plan Review Staff member, I want to Review
Plans, so that I can review them for compliance and either approve,
or fail or deny the plans and record any conditions, clearances, or
corrections needed from the Applicant.",
  "Persona": ["Plan Review Staff member"],
  "Action": {"Primary Action": ["Review"]},
  "Secondary Action": ["deny", "review", "approve", "fail", "record"]},
  "Entity": {"Primary Entity": ["Plans"],
    "Secondary Entity": ["compliance", "plans", "clearances", "Applicant",
      "corrections", "any conditions"]},
  "Benefit": "so that I can review them for compliance and either
approve, or fail or deny the plans and record any conditions,
clearances, or corrections needed from the Applicant",
  "Triggers": [{"Plan Review Staff member", "Review"}], "Targets": [[
  "Review", "Plans"], ["review", "compliance"], ["approve", "plans"], ["fail",
  "plans"], ["deny", "plans"], ["record", "clearances"], ["record",
  "corrections"], ["record", "any conditions"]],
  "Contains": [{"Applicant", "plans"},
    ["plans", "clearances"], ["plans", "corrections"], ["plans", "any
    conditions"]
  ],
  "US_Nr": "user_story_39"
},
```

Listing 4: JSON entities Related to user\_story\_39

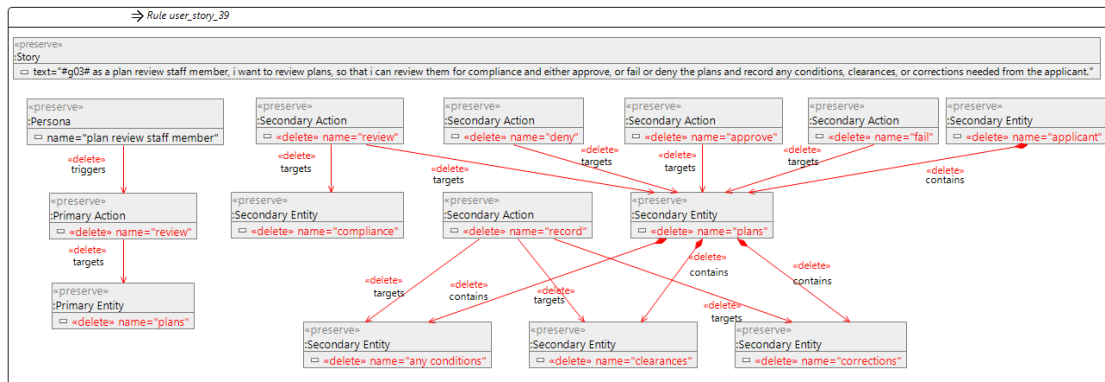


Figure 21: Generated transformation rule related to user\_story\_39 using RuleCreator class

Attribute "Plan", as we can see, it appears both in the main part as a primary entity and in the benefit part as a secondary entity, forming the various relationships as targets and contains.

**Example 4.9.** Listing 13 shows the JSON entities related to user\_story\_51 and Figure 45 shows transformation rule generated by RuleCreator class.

Text of US is: user\_story\_51: "#G03# As an Enforcement Staff member, I want to Issue a Notice of Violation, so that I can provide formal communication to the responsible party."

```
{
  "Text": "#G03# As an Enforcement Staff member, I want to Issue a
  Notice of Violation, so that I can provide formal communication to
  the responsible party.",
  "Persona": ["Enforcement Staff member"],
  "Action": {"Primary Action": ["Issue"],
    "Secondary Action": ["provide"]},
  "Entity": {"Primary Entity": ["Notice of Violation"], "Secondary
  Entity": ["formal communication", "responsible party"]},
  "Benefit": "I can provide formal communication to the responsible
  party",
  "Triggers": [{"Enforcement Staff member", "Issue"}], "Targets": [{"
  Issue", "Notice of Violation"}, {"provide", "formal communication"}],
  "Contains": [],
  "US_Nr": "user_story_51"
}
```

Listing 5: JSON entities Related to user\_story\_51

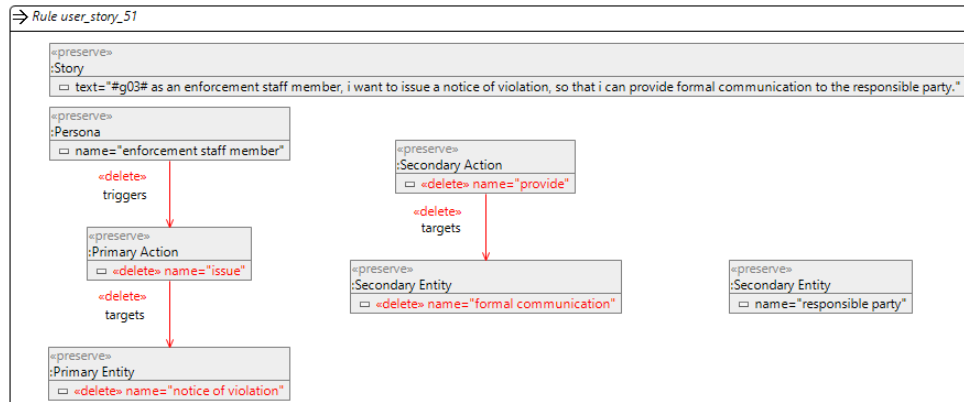


Figure 22: Generated transformation rule related to user\_story\_51 using RuleCreator class

Last but not least, we have determined that the secondary entity "responsible party" has neither a target nor a contains relationship. Therefore, it is not annotated as

*<delete>, but as <preserve>. This is due to the fact that some phrases have been identified as entities in the Doccano tool, but their relationship is not annotated at all, which is problematic for analysing redundancy.*

### Step 3: Conflict and Dependency Analysis

After the rules and the corresponding henshin file have been created by the RuleCreator class, we are now able to pass them to the conflict and dependency analysis (CDA) to find potential redundancy pairs.

Since the analysis of conflicts and dependencies related to the *attribute* is not yet considered in the CDA API <sup>18</sup>, we decided to use the user interface (UI) of the CDA extension of Henshin, which supports analysis of conflict and dependencies of rules through the interactive use of CDA.

To apply CDA to Henshin files, we just need to right-click on the Henshin file and select *Henshin -> conflict and Dependency Analysis* from the context menu as shown in Figure 46. A user interface then appears, prompting to select the rule sets to be analysed




Figure 23: Applying CDA to the selected Henshin file

and the type of analysis. We then select as “*First*” and “*Second Rules*”, all rules related to USs. Additionally, as the type of analysis we select “*conflicts*” as illustrated in Figure 47. On the next page of the CDA UI shown in Figure 48, we specify the depth of analysis

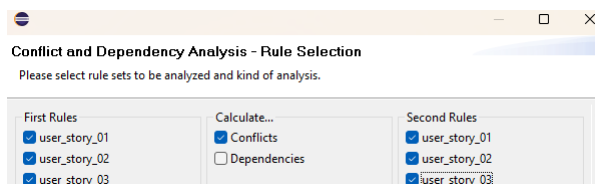


Figure 24: CDA user interface: Selection of rules and type of analysis

that we use with “*Fine granularity*” when selecting “*Create a complete result table*” and “*Create an abstract result table*”.

Fine granularity provides a detailed examination of each conflicting rule by listing all conflict reasons. Unlike coarse granularity, which focuses only on minimal conflict reasons, fine granularity includes both minimal and more general conflict reasons. The binary granularity, where simple conflicting rule pairs are listed, may be too simple for complex systems where understanding the nature of the conflict is essential for the solution. We choose “Fine granularity” as the depth of analysis due to the fact that

<sup>18</sup>[https://wiki.eclipse.org/Henshin/conflict\\_and\\_Dependency\\_Analysis](https://wiki.eclipse.org/Henshin/conflict_and_Dependency_Analysis)

it shows all conflict reasons for each conflicting rule pair. This allows for a deeper understanding of how different model fragments contribute to conflicts.

A conflict reason is a model fragment whose presence leads to a conflict. General conflict reasons result from different combinations of minimal conflict reasons[36]. During

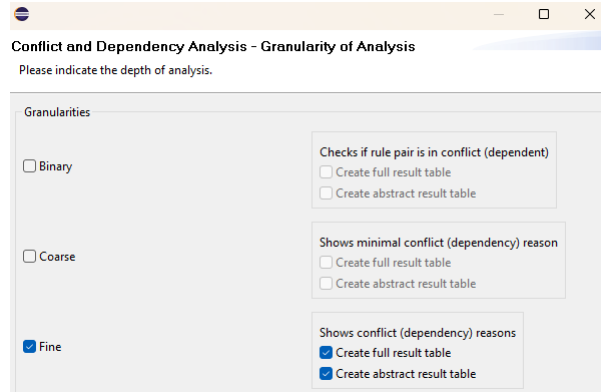


Figure 25: CDA user interface: Selection of report granularity

the execution of the CDA analysis, the rule pairs is analysed and a conflict analysis is performed. Once the calculation is complete, the results are listed in the “CDA” - > “Result window”, as shown in Figure 49. The top entry shows the granularity, which in our case is “Fine”. These entries contain the rule pairs that conflict with each other. Each rule pair contains a number of conflict reasons. Figure 50 shows how the data is




Figure 26: CDA report with fine granularity

saved in the project tree view. The results directory is created in the directory containing the Henshin that was used for the analyses. The new folder name is the date and time at which the analysis was performed. In contrast to the “CDA/Results” view, this folder contains all conflict reasons and atoms together in a rule pair directory. For each conflict reason, there is a “*minimal-model.ecore*” file, that contains packages in which various conflict elements such as “attributes” and “references” (edges) are mapped together and displayed in different packages.

Figure 51 shows the representation of the conflicting attributes and references. An attribute has the property of changing the value and is represented by an arrow “->”. The attribute from the first rule is separated from the second rule by an underscore, just as with the nodes.

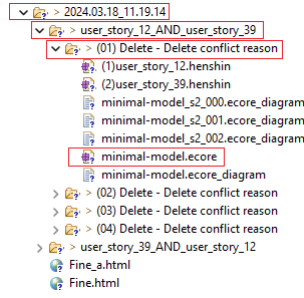


Figure 27: Saving CDA results data in the project structure view

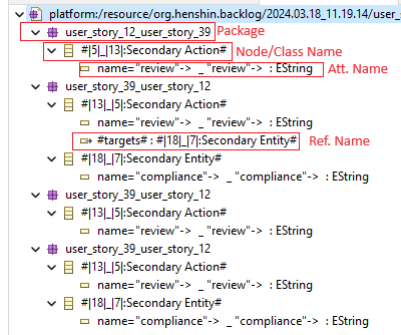


Figure 28: Representation of redundant attributes and references in *minimal-model.ecore* file

**Example 4.10.** To illustrate this step, we also pass the transformation rules created in step 2, which reflect three USs (*user\_story\_12/39/51*), to the CDA tool and selecting "conflicts" as conflict type to calculate with "fine granularity" as the depth of analysis. Once the calculation is complete, the results are listed in the "CDA" -> "Results Window" as shown in Figure 52. Figure 53 shows how the data is saved in the project's tree view, which contains all conflict reasons and atoms together in a rule pair direc-




Figure 29: CDA report in relation to three transformation rules with "conflicts" as the type to be calculated and "fine granularity" as the depth of the analysis

and *user\_story\_39*. This is because there are no redundant clauses between two USs




Figure 30: Saving CDA results data in the project's tree view

(*user\_story\_12* and *user\_story\_39*) and *user\_story\_51*.

Regarding the redundant elements specifically, we can refer to the created file "*minimal-model.ecore*", which is located in the tree view of the project under each conflict reason. Figure 53 show the *minimal-model.ecore* file related to *user\_story\_12* and *user\_story\_39*.

The file *Minimal-model.ecore*, which refers to *user\_story\_12* and *user\_story\_39*, is divided into packages, with each package containing different matches of redundant elements. If there is a redundancy between two elements, this is explicitly indicated by a hash symbol (#). Figure 54 illustrates the redundant elements found in each package.

For example, the attribute "name" with the value "review" in "Secondary Action"

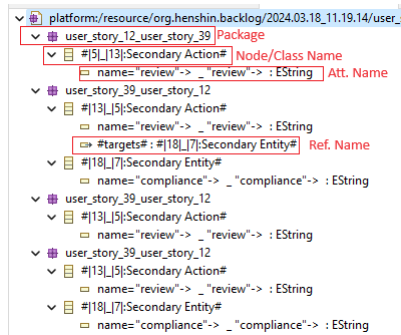


Figure 31: Representation of the redundant elements in each package within *minimal-model.ecore* file

and the attribute "targets" with the value "compliance" in "Secondary Entity" are labelled as redundant (both with a hash symbol). The reference to "targets" is also marked as redundant (with a hash symbol), which means that the reference (targets) from "Secondary Action" to "Secondary Entity" is also redundant between USs, which is a very important criterion for finding redundancy correctly.

#### Step 4: Report Extraction

To create a lightweight report for the group or individual in question, we need to extract the key information from the CDA report, e.g. redundancy US-pair, redundancy clauses, count of redundancy clauses in each part of the US (main or benefit part), and create a report as a text file with the following information:

- A table of potential redundant pairs with the number of total redundancy clauses.
- Founded potential redundant US-pairs.
- Redundancy words and clauses of founded US-pairs. Clauses consisting of two words that have one of the relationships triggers, targets or contains.
- Text of US-pairs whose redundancy words are marked with a hash symbol (#).
- Parts of the sentence in which words and clauses are found.

#### Structure of a US

The delineation and checking of redundancy clauses within USs requires a methodical approach, especially when distinguishing between the main and the benefit part of a US-pair. This distinction is crucial to ensure that redundancy identifications within one part are not mistakenly transferred to the other. Consequently, the analytical framework comprises three conditions, each of which specifies its own methodology for case processing:

- Presence of benefit in both USs of the redundancy-pair: if a benefit is identifiable in each US of the pair, a process of separation is used to split the main content from the benefit parts. After this separation, a targeted search for redundancy clauses is carried out only within the main part, whereby identified redundancies are annotated with a hash symbol (#). This process is repeated for the benefit parts to ensure a thorough check and marking of redundancies within each individual part.
- Exclusive presence of a benefit in one US of the redundancy-pair: In scenarios where only one US of the pair contains a benefit part, the analysis is limited to the main part of both USs. The aim remains the identification and annotation of redundancy clauses within this part. The lone benefit part remains in its original state and is excluded from the redundancy check.
- Absence of benefit parts in both USs of the pair: If neither of the two USs of the redundancy-pair contains a benefit part, the focus shifts completely to the main parts. The investigation is designed to highlight redundancy clauses within these parts, whereby the benefit parts are not taken into account due to their non-existence.

This structured and segmented approach ensures precise and efficient identification of redundancy clauses within the USs, optimising the clarity and effectiveness of textual report.

**Example 4.11.** After the CDA directory for user\_story\_12 and user\_story\_39 is created by CDA tool graphic interface (UI), we pass the location of directory into ReportExtractor class and in order to extracting the important information and save it into the textual report as well as JSON report. Listing 14 illustrates the example of the textual report. In this case, the report only contains one US-pair.

```
* Table of potential redundancies between user stories and the number of their overlapping
elements
```

	us_12	us_39
us_12	0	1
us_39	1	0

-----[Potential Redundant User Stories found]-----  
{user\_story\_12\_AND\_user\_story\_39}

Redundant clauses within user stories are:

- \* Secondary Action: review
- \* Secondary Entity: compliance
- \* Targets: Link from "review" to "compliance" is found.

user\_story\_39: #g03# as a plan review staff member, i want to review plans, so that i can #review# them for #compliance# and either approve, or fail or deny the plans and record any conditions, clearances, or corrections needed from the applicant.

user\_story\_12: #g03# as a staff member, i want to assign an application for detailed review, so that i can #review# the for #compliance# and subsequently approved or denied.

The following sentence parts are candidates for possible redundancies between user stories:

user\_story\_12: so that i can #review# the for #compliance# and subsequently approved or denied.

user\_story\_39: so that i can #review# them for #compliance# and either approve, or fail or deny the plans and record any conditions, clearances, or corrections needed from the applicant.

Listing 6: Example of generated textual report for one US-pair

As we can see, the text report consists of a 2 x 2 table whose first column and first row are US identifiers, and the numbers inside the table are the total number (benefit part + main part) of redundancy elements between two USs; secondly, the redundant clauses related to the redundant US-pair are listed; thirdly, the text of US whose redundant phrases are marked with a hash symbol; finally, the part of the clauses in which redundant elements occur is displayed.

For further evaluation purposes and easy export of the report to another platform such as Excel, a JSON report is created that collects the information about redundant US-pairs separately in a JSON object with the following entries:

- Potential Redundant User Stories: which has stored the US-pair identifier(e.g. "user\_story\_12\_AND\_user\_story\_39").



- Status: consisting of "Main/Benefit Part Redundancy Clauses" and "Total Redundancy Clauses", which store the count of redundancy clauses in the main and benefit part as well as in the total part of the US.
- Entity: which can consist of a "Secondary/Primary Entity" and stores the founded redundant entities.
- Common Targets/Contains: which consists of the "Main Part" and "Benefit Part" entries and only stores the targets/contains relationships that are common between the USs in a particular part of the USs. For example, if there are common redundant targets in the main part of the USs, these are included in the "Main Part" entity of the "Common Targets".
- Text: consisting of two entries, namely "First UserStory" and "Second UserStory", in which the text of the US-pair whose hash symbol has already been applied in redundant phrases is stored.
- Project Number: stores the number of the Project(e.g. "G03").
- Part of Sentence: consists of the entries "First UserStory" and "Second UserStory", in which the part of the US sentences containing redundant clauses is stored.
- All Targets/Contains: which consists of the "Main Part" and "Benefit Part" entries and stores the whole targets/contains relationships that are occurred in the particular part of the USs.

**Example 4.12.** *Listing 15 illustrates the example of the JSON report regarding user\_story\_12 and user\_story\_39.*

```
[
  {
    "Potential Redundant User Stories": "user_story_12_AND_user_story_39",
    "Status": {"Main Part Redundancy Clauses": 0, "Total Redundancy Clauses": 1,
    "Benefit Part Redundancy Clause": 1,},
    "Entity": {"Secondary Entity": ["compliance"]},
    "Common Targets": {"Main Part": [], "Benefit Part": [{"review", "compliance"}]},
    "Action": {"Secondary Action": ["review"]},
    "Common Contains": {"Main Part": [], "Benefit Part": [], "Targets": [{"review",
    "compliance"}]},
    "Triggers": [],
    "Text": {"Second UserStory": "user_story_39: #g03# as a plan review staff member,
    i want to review plans, so that i can #review# them for #compliance# and either
    approve, or fail or deny the plans and record any conditions, clearances, or
    corrections needed from the applicant.",
    "First UserStory": "user_story_12: #g03# as a staff member, i want to assign
    an application for detailed review, so that i can #review# the for
    #compliance# and subsequently approved or denied."},
    "Project Number": "g03",
    "Part of Sentence": {"Second UserStory": [" so that i can #review# them for
    #compliance# and either approve, or fail or deny the plans and record any
    conditions, clearances, or corrections needed from the applicant."],
    "First UserStory": [" so that i can #review# the for #compliance# and
    subsequently approved or denied."]},
    "All Contains": {"user_story_39": {"Main Part": [], "Benefit Part": [{"applicant",
    "plans"}, {"plans", "clearances"}, {"plans", "corrections"}, {"plans", "any conditions"}
    ]},
    "user_story_12": {"Main Part": [{"application", "detailed review"}], "Benefit
    Part": []}},
    "All Targets": {"user_story_39": {"Main Part": [{"review", "plans"}], "Benefit Part"
    : [{"review", "plans"}, {"review", "compliance"}, {"approve", "plans"}, {"fail", "plans"}
    ], {"deny", "plans"}, {"record", "clearances"}, {"record", "corrections"}, {"record",
    "any conditions"}]},
    "user_story_12": {"Main Part": [{"assign", "application"}], "Benefit Part": [{"
    review", "compliance"}, {"subsequently approved", "compliance"}, {"denied",
    "compliance"}]}}
  ],
]
```

Listing 7: Example of generated JSON report for one US-pair

## Step 5: Report Evaluation

The Evaluation class, part of the *org.henshin.backlog.code.evaluation* package, was developed to determine the level of redundancy in USs based on JSON reports. This class provides methods to evaluate whether two USs are either fully or partially redundant, analysing different application components of these USs.

The evaluation process involves a complex logic to determine whether USs are redundant. This includes:

- Checking whether the arrays are empty or contain similar elements.
- Comparing the individual elements in the arrays for both USs to determine if they fully match (full redundancy) or if they have some common elements (partial redundancy).

**Example 4.13.** *For the two US-pairs of dataset G03, we apply the evaluation class to determine whether there is redundancy in the main or benefit part, and if so, what type of redundancy is recognised(full or partially).*

*As shown in Listing 16, four entries are added to the JSON report, namely "Main Partially Redundant", "Benefit Part Fully Redundant", "Main Part Fully Redundant", "Benefit Partially Redundant" as "Status" which their value is whether true or false.*

```
"Status":
{
  "Main Part Redundancy Clauses": 0,
  "Main Part Partially Redundant": false,
  "Total Redundancy Clauses": 1,
  "Benefit Part Fully Redundant": false,
  "Benefit Part Redundancy Clause": 1,
  "Main Part Fully Redundant": false,
  "Benefit Part Partially Redundant": true
},
```

Listing 8: Example of generated entries in JSON report regarding evaluation of level of redundancy in main or benefit part

*In the case of user\_story\_12 and user\_story\_39, the entry "Benefit Partially Redundant" was marked as true, which means that US-pair in benefit parts are partially redundant.*

The class performs these checks by iterating through the JSON arrays of Triggers, Targets and Contains and comparing each element with those in the common sections to determine redundancy.

### 4.3 Implementation

In this section, we explain the objective and scope of the implementation, the functionality and the programming languages used.

The entire implementation is available in the GitHub repository <sup>19</sup>.

<sup>19</sup>[https://github.com/amirrabieyannejad/Redundancy\\_Analysis/tree/main](https://github.com/amirrabieyannejad/Redundancy_Analysis/tree/main)

## Methodology

This section explains and introduces tools that are required during the development process.

Following approach and tools are necessary in order to develop our workflow:

- Java as programming language<sup>20</sup>: Java is a widely used object-oriented programming language and software platform that is used to implement the Henshin and EMF APIs, which are critical to our approach to utilising them. Therefore, we use Java as our programming language.
- GitHub as version control<sup>21</sup>: GitHub is a developer platform that allows developers to create, store, manage and share their code. It uses Git software, providing the distributed version control of Git plus access control, bug tracking, software feature requests, task management, continuous integration, and wikis for every project.

## Implementation Phases

This section contains a step-by-step guide to implementation, starting with the set-up and ending with the final evaluation.

### Creation of Rules

In this section, we explain the methods we used to convert the US data structured in JSON files into transformation rules using the Henshin API. The process starts with the creation of an Ecore meta model, as explained in Section 5.2, which reflects the structure of the data. The henshin transformation rules are then generated using the RuleCreator class and its methods.

### Methods of the RuleCreator Class

In this section, the methods of the RuleCreator class is described as follows:

- `assingCmodule`: This method assign a CModule to a Ecore meta-model. It creates a new CModule object with the provided Henshin-file name, adds imports from the Ecore file, and returns the module.
- `processJsonFile`: It takes parsed JSON array as input and processes their attributes, such as persona, actions, entities, text and their edges, such as targets, triggers. Corresponding elements are created as output in a the Henshin transformation module (CModule).

---

<sup>20</sup><https://www.java.com/de/>

<sup>21</sup><https://github.com/>

- **processRule:** It takes the “US\_Nr” JSON-object as input and creates a new CRule with the name of unique US identifier in the CModule.
- **processPersona:** It receives as input the persona extracted from the JSON data and the associated CRule to create a new CNode representing the persona within the provided CRule and adds the attribute “name” with persona as value. Finally, the created CNode representing the persona is returned.
- **processText:** It receives as input US text extracted from JSON data and the associated CRule to create a new CNode representing the text within the provided CRule and adds the attribute “text” with US text as value. Finally, the created CNode representing the US text is returned.
- **processActions:** The processActions method is responsible for creating CNode objects that represent actions within the CModule. As parameters, it receives the JSON-object of the actions, the CNode-object representing the persona associated with the actions and the unique identifier of the US. Since the edge triggers only refer to the persona and the primary action, a new CNode is created for each primary action that represents the primary action within the provided CRule, an attribute “name” is added and an edge is created from the persona node to the primary action with the label “triggers”. For each secondary action, a new CNode is created to represent the action within the provided CRule and an attribute “name” is added to the action node.
- **checkEntityIsTarget:** It receives the name of the entity and the JSON-array with information about target edges. The method iterates through the JSON-array targets, which contains arrays that represent targets edges between actions and entities. It compares the targets entity with the specified entity. If there is a match, it returns true to indicate that the entity is a target.
- **processEntities:** It receives as parameters the JSON-object with information about the entities, the CRule object representing the US to which the entities belong and the JSON-array with information about the targets associated with the entities. The method checks whether primary/secondary entities are present, then creates a CNode for each primary/secondary entity and checks whether the entity is present in the target array. If this is the case, its attribute “name” is annotated for deletion. This method is used within the processContainsEdges method to determine whether an entity involved in a contains relationship is also a target of another entity.
- **processContainsEdges:** It receives the JSON-object to be processed, the JSON array with information about contains/target edges and the US identifier as parameters. It first checks whether both entities belong to contains edges. If both entities exist, an edge is created between them in CRule with the name “contains”. If one of the entities is a target of another entity (as specified in the targets array),

the edge is annotated for deletion. If none of the entities is a target, the edge is annotated as “preserve”.

Figure 55 is a class diagram that illustrates the attributes, operations and relationships related to the RuleCreator class.

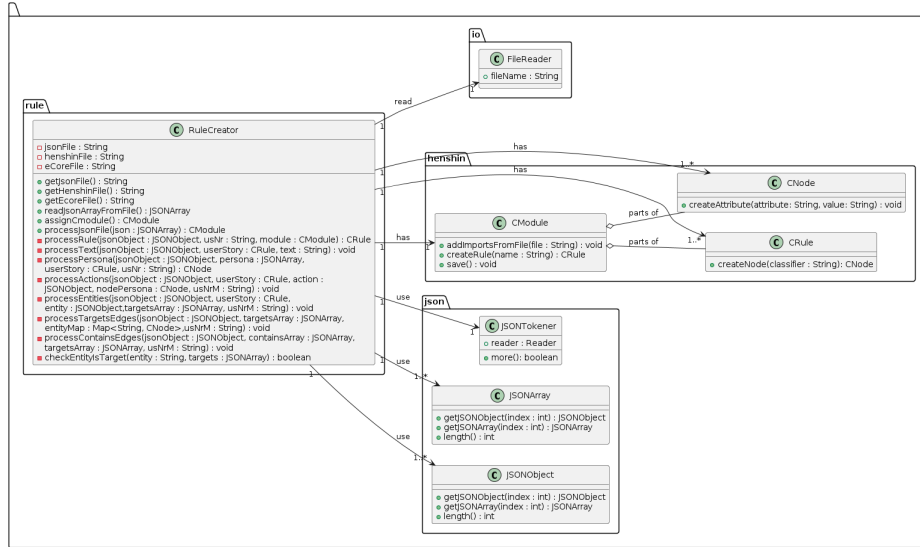


Figure 32: Class diagram of the RuleCreator class and its relationships

## Report Extraction

In order to extracting a textual report associated with a specific backlog, we implement a class called *ReportExtractor* within the package *org.henshin.backlog.code.report*, which include the following classes form the package *org.eclipse.emf.ecore*<sup>22</sup>. These classes are important for reading the content of minimal-model.ecore:

- *org.eclipse.emf.ecore.resource.Resource*: A resource of an appropriate type is created by a resource factory; a resource set indirectly creates a resource using such a factory. A resource is typically contained by a resource set, along with related resources.
- *org.eclipse.emf.ecore.resource.ResourceSet*: A resource set manages a collection of related resources and notifies about changes to this collection. It provides a tree of content. A collection of adapter factories supports the search for an adapter via a registered adapter factory.

<sup>22</sup><https://download.eclipse.org/modeling/emf/emf/javadoc/2.7.0/org.eclipse/emf/ecore/>

- org.eclipse.emf.ecore.EObject: EObject is the root of all modelled objects, therefore all method names start with "E" to distinguish the EMF methods from the client methods. It provides support for the behaviour and functions that are common to all modelled objects.
- org.eclipse.emf.ecore.EPackage: A representation of the model object "EPackage".
- org.eclipse.emf.ecore.EClassifier: A representation of the model object "EClassifier".
- org.eclipse.emf.ecore.EClass: A representation of the model object "EClass".
- org.eclipse.emf.ecore.EAttribute: A representation of the model object "EAttribute".
- org.eclipse.emf.ecore.EReference: A representation of the model object "EReference".

### Storing Redundancy Items into RedundancyItems Class

To save the redundant elements found by the CDA tool, we implement classes to save the elements according to their type.

Figure 56 is a class diagram that illustrates the attributes, operations and relationships related to the RedundancyItems class to store the redundancy elements provided by the CDA tool. The following classes were created to represent the extracted model object accordingly. All these classes are extensions of the class *RedundancyItems*, which contains all extracted model object from "minimal-model.ecore" such as "EClass", "EAttribute" or "EReference":

- PrimaryAction/SecondaryAction: Which has only saved the EClass specified by "Primary/Secondary Action" and the EAttribute model object with the methods *getType* to retrieve the saved EClass and *getName* to retrieve the saved EAttribute.
- PrimaryEntity/SecondaryEntity: Which has only saved the EClass specified by "Primary/Secondary Entity" and the EAttribute model object with the methods *getType* to retrieve the saved EClass and *getName* to retrieve the saved EAttribute.
- Targets: The EClass specified by "Primary/Secondary Action" as *outgoing edge* and an EAttribute model object as *incoming edge* with "Primary/Secondary Entity". The method *getType* retrieve the stored EClass and method *getName* retrieve the stored EAttribute.
- Contains: The EClass specified by "Primary/Secondary Entity" as *outgoing edge* and an EAttribute model object as *incoming edge* with "Primary/Secondary Entity". The method *getType* retrieve the stored EClass and method *getName* retrieve the stored EAttribute.

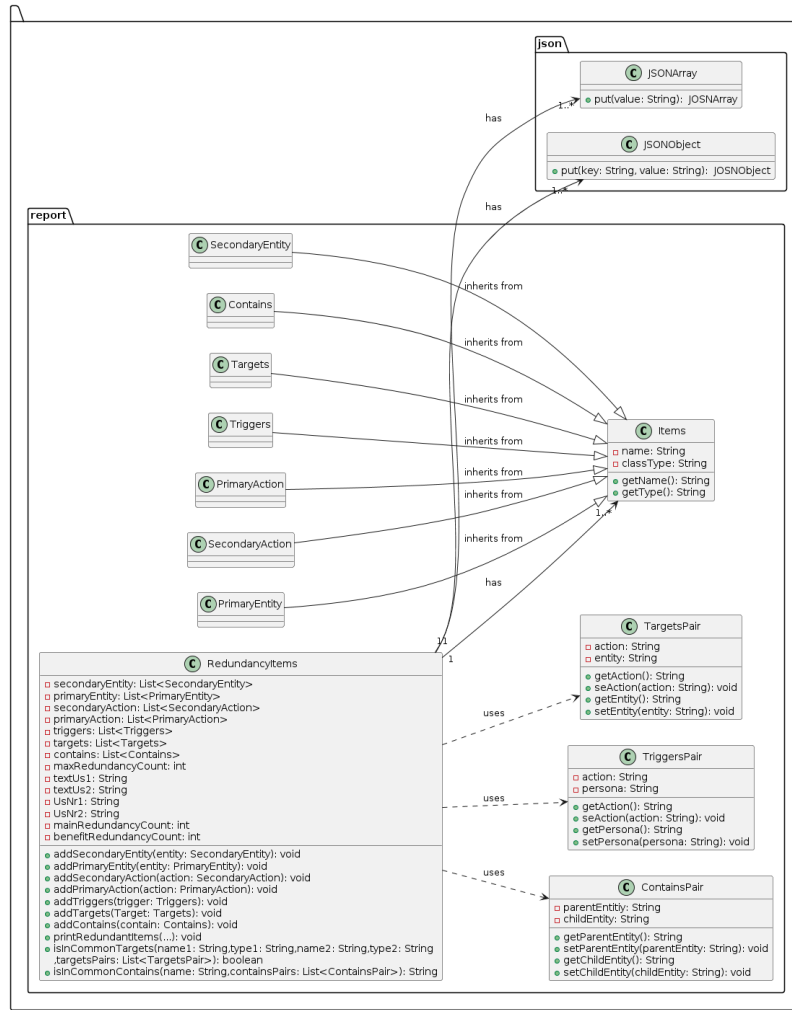


Figure 33: Class diagram for the RedundancyItems class and its relationship

- **Triggers:** The EClass specified by “Persona” as *outgoing edge* and an EAttribute model object as *incoming edge* with “Primary Action”. The method *getType* retrieve the stored EClass and method *getName* retrieve the stored EAttribute.
- **RedundantPair:** Stores the identifier of the two USs that were founded as a redundant pair. It also stored the total count of redundancy clauses within the US-pair.
- **TargetsPair:** Stores effective value of “Primary/Secondary Action” and “Primary/Secondary Entity” in action and entity fields accordingly.
- **ContainsPair:** Stores effective value of “Primary/Secondary Entity” as “parent/child entity” due to the fact that parent entity is a containment of child entity.



- **TriggersPair:** Stores effective value of “*Persona*” as a persona and “*Primary Action*” as an action.

The class `RedundancyItems` contains following methods which are important for class `ReportExtractor`:

- **isInCommonContains:** This method is designed to determine whether a given entity (specified by its name) is part of a redundant pair listed in the “Contains” array of related USs stored in a JSON file.

As input, it receives the name of the entity for which we want to check whether it exists in a redundant pair. In addition, a list of redundant pair objects that represent pairs of entities where one entity contains the other. If there is a match with the parent entity, it returns the child entity and vice versa.

- **isInCommonTargets:** This method is responsible for determining whether a particular action/entity is part of a redundant pair listed in the “Targets” array of related USs stored in a JSON file.

As input, it receives the name and type of the first element, which is an action, and the name and type of the second element, which is an entity. It also receives a list of `TargetsPair` objects, which are pairs of common actions and entities between US-pairs.

For each pair, it checks whether the specified names and types match either the action or entity in the pair. If a match is found, the method returns *true*, which means that the specified elements are part of a redundant pair.

- **printRedundantItems:** This method is responsible for creating a report on redundancy items based on the data stored in the class instance.

As input, it takes several parameters, including a “`FileWriter`” to write to the textual report’s file, lists of different pairs of “Targets”, “Contains” and “Triggers”, and a JSON-object to store the report data in JSON format, which is vital for evaluation.

### **ReportExtractor Class: Methods related to Extracting Redundancy Items**

To extract the redundant elements and save them in a `RedundancyItems` object, we must first iterate through all existing *minimal-mode.ecore* files and extract the redundant redundancy item from each `EPackage`.

Figure 57 is a class diagram that illustrates the attributes, operations and relationship related to the extraction of redundancy items founded by the CDA tool and their storage in a `RedundancyItems` object.

The following methods in the `ReportExtractor` class are responsible for extracting the redundancies found by the CDA tool:

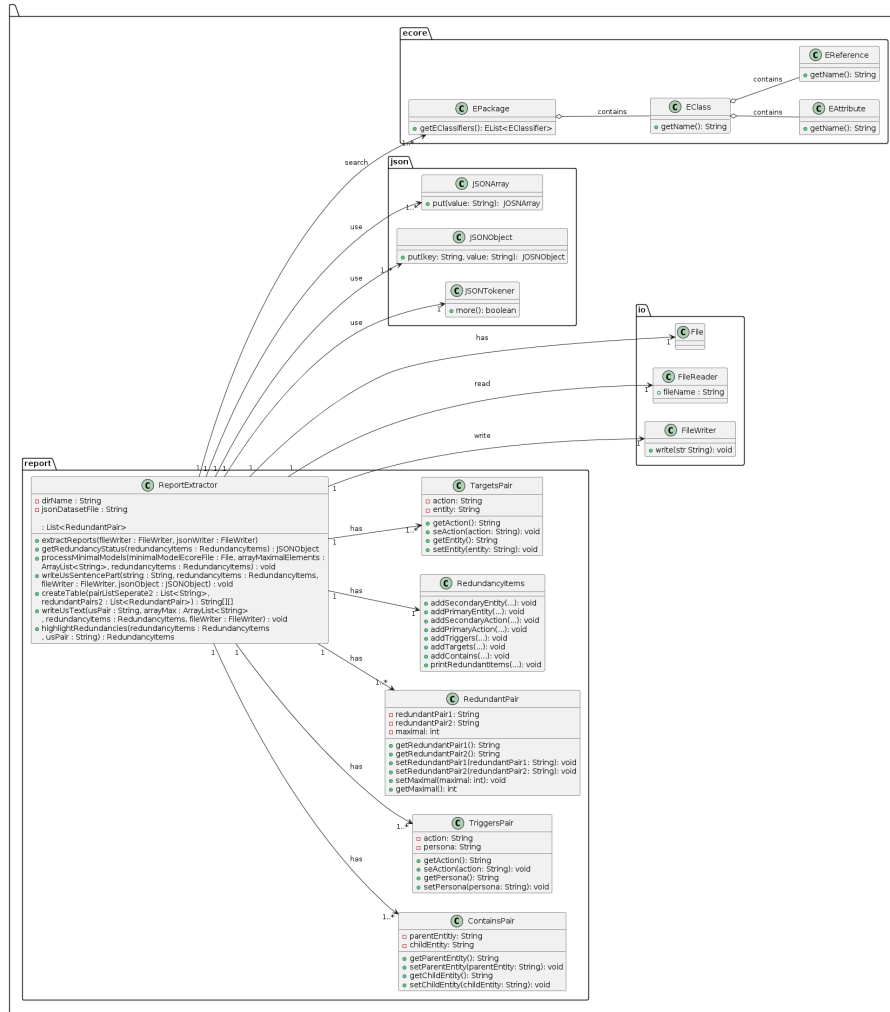


Figure 34: Class diagram for the process of extracting redundancy items

- **extractReports:** This method orchestrates the extraction and analysis of created CDA report from a directory containing conflicted US-pairs and their associated reasons(conflict reason), and generates both text and JSON reports for further investigation and processing.

It receives two `FileWriter` objects as input, one for writing textual and one for JSON reports.

It iterates through each directory in the main directory that represents a conflict pair and uses the `checkIfReportExist` method to make sure that the current US-pair are not already proceeded and the `containsAnd` method to check whether it contains the conjunction “AND” to make sure that it is the valid US-pair name(*e.g.* “user\_stroy\_12\_AND\_user\_stroy\_39” is a valid directory name).

For each valid conflict pair directory, it iterates through the conflict reason directories within the current conflict pair directory and uses the *minimalEcoreExist* method to check whether a *minimal-model.ecore* file exists with reference to a conflict reason.

To identify redundancy items, it uses the method *processMinimalModels* and reads the "minimal-model.ecore" file, processes its content and iterates over the contained EPackages in order to process them further with the method *iteratePackages*, which saves all redundancy items in RedundancyItems object.

In addition, the methods *hasEntitys*, *hasActions* and *hasTargets* are used to check whether the identified elements contain "Primary/Secondary actions" and "Primary/Secondary Entities" with common "Targets" reference. If the identified elements fulfil the criteria, the redundancy pair is included in the report.

It then writes the potentially redundant USs and their clauses to the textual as well as JSON report files for further analysis.

As output, the method returns a list of RedundantPair objects containing information about identified redundancies between US-pairs.

- *createOrOverwriteReportFile*: The method is responsible for creating or overwriting report file. It first ensures the existence of a report file. If the file doesn't exist, it creates a new one; if it already exists, it overwrites the existing file. Finally, it returns a *FileWriter* to allow writing to the report file.
- *checkIfReportExist*: This method takes two parameters, namely US-pair and the list of all previously processed pairs in the CDA report directory. It returns *true* if the US-pair was found in the pairList, which means that a report with the specified pairs has already been executed and therefore does not need to be executed again.
- *minimalEcoreExist*: This method checks the existence of a *minimal-model.ecore* file using a conflict pair and a conflict reason generated by CDA tool.

As input, it receives a conflict pair and a conflict reason. Using these parameters, the method constructs the file path to the minimal-model.ecore file and checks whether the file exists under the constructed path.

If the ECore file exists, the method returns *true*, indicating that the minimal-model.ecore file exists for the examined conflict pair and conflict reason. If the file does not exist, *false* is returned.

- *containsAnd*: This method ensures that the folder name is identified with "\_AND\_", as the report generated by CDA tool is formatted like "user\_story\_<digit>\_AND\_user\_story<digit>". It returns *true* if the examined directory contains "AND", otherwise *false* is returned.
- *processMinimalModels*: This method reads a Minimal Model Ecore file, processes its content and iterates over the contained EPackages in order to process them further with the *iteratePackages* method.

As parameters, it receives a File object that represents examined minimal model ecore file, an array list in which the names of the redundant elements are stored, and a RedundancyItems object that is used to handle redundant elements.

First, a ResourceSet and a ResourceFactoryRegistry corresponding to the minimal model Ecore file are set up and a Resource object is created from the Ecore file; the *iteratePackages* method is called for each EPackage.

- *iteratePackages*: This method identifies redundancies within the attributes and references of EClasses in examined minimal model, stored them accordingly and updates the RedundancyItems object.

It takes several parameters, such as the EPackage to be iterated over, an array list in which the names of the redundant elements are stored, and a RedundancyItems object.

It iterates through every EClassifier in the minimal package that contains EClasses and checks whether “#” is present in EClass; if this is the case, EClass has been recognised as a conflict by CDA tool.

If an attribute is found, the class of the conflicting attribute is determined and added to the corresponding element within RedundancyItems (e.g. Primary/Secondary Action/Entity).

Each EReference is then iterate through in the EClass. Depending on the reference name, the reference is added to the corresponding element within RedundancyItems (e.g. Triggers, Targets, Contains). The method is completed once all EClassifiers within the specified EPackage have been processed.

- *hasActions*: This method is useful for using the data stored in RedundancyItem to determine whether certain actions are present in a list of redundant entries, in order to later check whether the identified elements fulfil the criteria and the redundancy pair is included in the report.

It checks if there’s a match with name of any primary/secondary action stored in the RedundancyItems object. If match is found, it immediately returns *true*.

- *hasEntitys*: This method is used to determine whether certain secondary/primary entities are present in the RedundancyItems object based on their name. For each item, it checks whether there is a match with the name of a primary/secondary entity stored in the RedundancyItems object.

If a match is found, *true* is returned immediately, in order to later check whether the identified elements fulfil the criteria and the redundancy pair is included in the report.

- *hasTargets*: This method uses the content of a RedundancyItems object to determine whether targets are present in a list of founded redundant elements.

As input, it receives an array list with the names of the redundant elements and an object of the type `RedundancyItems`, which contains a collection of founded "Targets".

The method checks whether there is a match with the name of any targets reference stored in the `RedundancyItems` object.

If a match is found between the elements, the method immediately returns *true*, which means that at least one targets reference is present, in order to later check whether the identified elements fulfil the criteria and the redundancy pair is included in the report.

- `readJsonArrayFromFile`: This method provides the ability to read JSON data from a file and convert it into a `JSONArray` object, handling cases where the file is empty or does not exist.

It receives the file path of the JSON file to be read as input. An attempt is made to open the specified file and check whether the file is empty or does not exist. If the file exists and is not empty, it reads the JSON data from the file and creates a JSON array object from the JSON data read from the file and returns the JSON array object with the JSON data.

- `getRedundancyStatus`: This method add statistics like count of main/benefit/total redundancies into JSON report. It receive as input `redundancyItems` and as output write the count of main/benefit/total redundancies into JSON report already defined in method `highlightRedundancies`.

## Methods for Extracting Data from Dataset of Backlog

To get information about USs such as text, redundant clauses in targets/contains/triggers references between US-pairs, we need to extract data from the dataset stored in the JSON file.

The following methods in the `ReportExtractor` class are responsible for extracting data from dataset within JSON file:

- `readJsonArrayFromFile`: This method receives a JSON file as input. After reading, the JSON content is tokenised, parsed into a JSON array and the parsed JSON array is returned.
- `getUssTexts`: This method ensures that the text of the specified US-pair is retrieved from the JSON file and properly assigned to the `RedundancyItems` object for further processing. It receives a US-pair and `RedundancyItems` as input.

It reads a JSON array from a file using the `readJsonArrayFromFile` method, iterates over each JSON object in the array and compares the extracted US identifier with the US identifier extracted from the input US-pair. If a match is found, the text of the first and second USs is set in the `redundancyItems` object.

- `getCommonTargets`: Used to determine overlaps in "Targets" references (pairs of actions and entities) between specified US-pairs from a JSON file.

It receives the identifiers of the US-pair as input. After it finds the US objects, it compares each pair of entries (actions and entities) in "Targets" references of the two USs and looks for matches.

The output is the matches, i.e. the list of common pairs of actions and entities, in "Targets" reference.

- `getCommonContains`: Used to determine overlaps in "Contains" references (pairs of entities) between specified US-pairs from a JSON file.

It receives the identifiers of the US-pair as input. After it finds the US objects, it compares each pair of entities in "Contains" references of the two USs and looks for matches.

The output is the matches, i.e. the list of common pairs of entities, in "Contains" reference.

- `getCommonTriggers`: Used to determine overlaps in "Triggers" references (pairs of personas and actions) between specified US-pairs from a JSON file.

It receives the identifiers of the US-pair as input. After it finds the US objects, it compares each pair of entries (personas and actions) in "Triggers" references of the two USs and looks for matches.

The output is the matches, i.e. the list of common pairs of personas and actions, in "Triggers" reference.

## Methods for Highlighting Words using Hash Symbol(#)

In order to distinguish redundancy words between a US-pair, in text of each US, we decide to highlighting redundant words using hash symbol like "... #<word># ...".

The following methods in the `ReportExtractor` class are responsible for highlighting redundancy words:

- `writeUsText`: This method reads the text of examined US-pair, highlights redundant element between them using *highlightRedundancies* method, writes the highlighted text to a file, and records information about the redundant elements.

As input it receive a US-pair, a list of redundant pairs to store redundant pairs in it, an object `RedundancyItems` containing stored redundancy elements and a `FileWriter` object used for writing output.

It extract the identifier of the two USs from US-pair, retrieves the text of the USs from JSON file and add them to `RedundancyItems`, invoke the *highlightRedundancies* method to identify and highlight redundants between the USs, it writes the highlighted text of each US to the `FileWriter`. Finally, sets the redundant pair and count of redundancy clauses.

- **highlightRedundancies:** This method identifies redundancies between US-pair, applies hash symbols using *applyHashSymbols* method to highlight common items and updates the redundancy counts in the *redundancyItems* object.

It takes two parameters, *redundancyItems* and *US-pair*, which represents the pair of USs to be analysed.

It checks whether both USs contain a main clause part or whether one of them has a benefit part or whether both USs also have a benefit part.

It applies hash symbols to common elements that only occur in the part of the USs that occurs in the same part (e.g. only main or only benefit part of the USs).

In each condition, it checks if there are redundancy clauses in the main part, then *persona* is also highlighted using *applyHashSymbolPersona* method. It also updates the count of main/benefit/total redundancies and sets the changed text of USs. Finally, it returns the updated *redundancyItems* object.

- **applyHashSymbols:** This method is used to mark certain words within a substring with hash symbols (#) at the beginning and end to ensure that they are distinguishable and can be easily identified or processed later.

It takes a substring in which replacements are to be made and a field of matches containing the words to be surrounded with hash symbols. First, the field of matches is sorted in descending order of length and processed accordingly to avoid adding hash symbols to unwanted clauses.

**Example 4.14.** *For example, let's assume that we have "data" and "data format" as redundancy elements. If we continue first with "data" and then with "import data", "import data" will be replaced by "import #data#", which is not desired.*

- **hasMoreThanFour/SixHashSymbols:** These methods receive a text from the US as input. They are used to check whether there are redundant clauses in the main part of the sentence (it can be one or two clauses). If so, *true* is returned.
- **applyHashSymbolPersona:** This method identifies common "Triggers" references, marks them with hash symbols and returns the changed text parts together with the count of redundant triggers references.

As input, it receives a list of common triggers between US-pair, *RedundancyItems* and the parts of the USs. It iterates through the list of common triggers and checks whether both elements(*persona* and *primary action*) of the triggers are present in both parts.

It then increments the redundancy count to keep track of the count of redundant triggers. The output returned, is the text of USs containing the manipulated text parts with hash symbols and the redundancy count in main part.

- **applyHashSymbolTargets:** This method identifies common targets references between two parts of USs, marks them with hash symbols and returns the changed text parts together with the count of redundant targets references.

As input, it receives a list of common targets between the US-pair, RedundancyItems and the parts of the USs.

It iterates through the list of common targets and checks whether both elements (primary/secondary action and primary/secondary entity) of the targets are present. It then increments the redundancy count in examined part of USs to keep track of the count of redundant targets.

The output returned is the text of USs containing the manipulated text parts with hash symbols and the redundancy count in examined part(main or benefit).

- **applyHashSymbolContaiaans:** This method identifies common contains references between two parts of USs, marks them with hash symbols and returns the changed text parts together with the count of redundant contains references.

As input, it receives a list of common contains between the US-pair, RedundancyItems and the parts of the USs. It iterates through the list of common contains and checks whether both elements of the contains are present in both parts. It then increments the redundancy count to keep track of the count of redundant contains.

The output returned is the text of USs containing the manipulated text parts with hash symbols and the redundancy count in examined part(main or benefit).

## Methods related to Report Divided Parts of USs

To show which part of the USs with redundancy words occur between a US-pair, we have split the individual parts of the USs and included them in the report. The following methods in the ReprortExtractor class are responsible for splitting and reporting the parts of the USs :

- **splitUsText:** This method is used to split the text of two USs into separate sections based on the occurrence of redundancy clauses.

The input is the text of the first and second US and their corresponding identifiers, a FileWriter for writing to a file and a JSON object for processing JSON data.

It splits each US text into three parts using commas and saves the result in arrays. It iterates over parts of the first and second USs and searches for occurrences of hash symbol pairs. For each part, the number of hash symbol pairs found is counted. Finally, all parts of the records that contain hash symbols are written to a text file and a JSON file as well.

- **writeUsSentencePart:** This method facilitates the extraction and storage of highlighted USs parts from US-pair in a textual report file for further analysis.



As input, it receives the US-pair, RedundancyItems and a FileWriter allowing the extracted USs parts to be written. It receives the text of the USs from the redundancyItems object and calls the *splitUsText* method to split the US-pair texts into USs parts with highlighted elements.

The extracted USs parts are also written to the text and JSON report files, using the FileWriter for further processing and analysis.

**Example 4.15.** *Take, for example, the following US-pair:*

*user\_story\_60: #g22# as an it staff member, I want to #know# #how# the #data# is #used#, so that I can determine what kind of basic services and functionalities are required.*

*user\_story\_04: #g22# as a data manager, I want to #know# #how# the #data# is #used#, so that I can develop more detailed usage and support scenarios with researchers.*

*The following sentence parts are candidates for possible redundancies between user stories:*

*user\_story\_04: I want to #know# #how# the #data# is #used#*

*user\_story\_60: I want to #know# #how# the #data# is #used#*

## Methods related to Creating Table

The summary of potential redundancy between US-pairs is presented in a table, which makes it easy to find out which US-pairs have been identified as potentially redundant US-pairs and how many redundancy elements there are in total. The following methods in the ReportExtractor class are responsible for creating a table at the beginning of the text report:

- **writeTable:** This method is used to write a table of potential redundancies between USs and the count of their total redundant clauses *createTable* method.

As input, it receives a File object into which the table is inserted and a list of redundancy pairs containing information about redundant clauses in US-pars.

It reads the existing content of the textual report file into a StringBuilder. It creates a table to display the potential redundancies between USs and the count of total redundancy clauses.

The table headers and contents are generated based on the redundant pairs. It calculates the maximum width for each column in the table to ensure proper formatting. Finally, the table content is written to the FileWriter, followed by the existing content stored in the report's StringBuilder.

- **createTable:** This method prepares the content for the table in which potential redundancies between USs are displayed, taking into account the total redundancy count between each US-pairs based on the RedundantPair objects provided.

As input, it receives a list of unique US-pairs for which the table is to be created and a list of RedundantPair objects containing information about redundant clauses between US-pairs.

It initialises a two-dimensional array containing the contents of the table. The size of the table is determined by the count of unique pairs of USs plus one for the header row and column.

It fills the header row and the first column of the table with unique pairs of US-pairs, replacing “user\_story” with “us” for the purpose of brevity.

It calculates the maximum redundancy count between each US-pair by calling the method *getTotalRedundanciesFromPair*. Finally, it fills the table with the total redundancy count.

The output is a two-dimensional array representing the contents of the table, with each cell containing the maximum redundancy count between the corresponding pair of USs.

- **getTotalRedundanciesFromPair:** This method makes it easier to retrieve the total number of redundancies between a US-pair from a list of RedundantPair objects.

As input, it receives a list of RedundantPair objects containing information about redundant elements in US-pairs, where the first and second USs are to be compared.

It iterates through each RedundantPair object in the RedundantPairs list and checks for each RedundantPair object whether the examined US-pair matches as redundant US-pair.

If a matching pair is found, the maximum redundancy number stored in this RedundantPair object is returned. If no matching pair is found, *zero* is returned, indicating that there are no redundancies between the examined US-pair.

## Report Evaluation

The Evaluation class, found in the *org.henshin.backlog.code.evaluation* package, was created to assess redundancy levels in USs based on JSON reports. This class includes methods that evaluate whether two USs are fully or partially redundant, focusing on various application components within these USs.

Figure 58 is a class diagram that illustrates the attributes, operations of the Evaluation class and its relationship to other classes. The class offers a detailed mechanism to evaluate redundancy through following methods:

- *evaluateRedundancyCriteria:* This method compares elements such as “Triggers”, “Targets” and “Contains” in the “Main” and “Benefit” parts of USs. The method

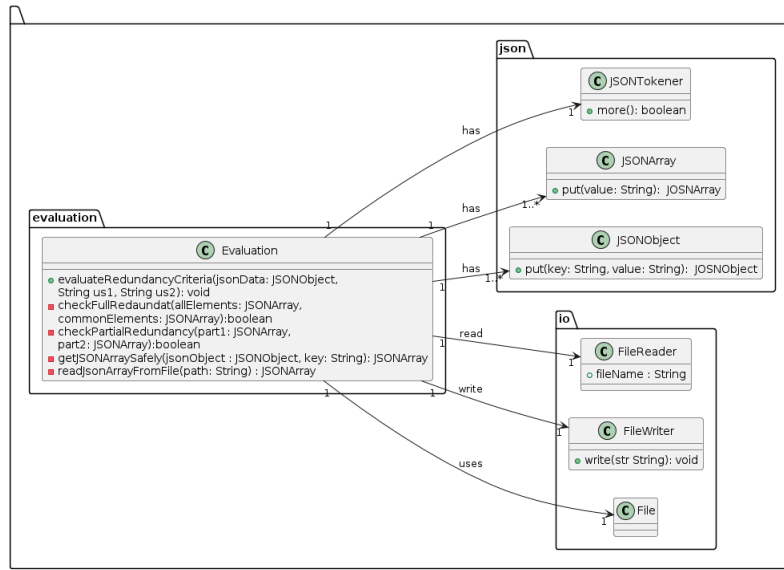


Figure 35: Class diagram related to Evaluation class

checks whether these clauses are fully redundant (i.e. they are identical between USs) or partially redundant (i.e. they share some clauses but are not fully identical).

As input, it receives the JSON object for a specific US-pair.

In particular, it checks various conditions, e.g. whether common clauses are present, whether targets or contains are empty and whether the clauses in the stories are fully or partially identical.

As output, the method updates the JSON report with new keys indicating the redundancy status:

**Main Part Fully Redundant:** A Boolean value indicating whether the "main part" of the USs is fully redundant.

**Main Part Partially Redundant:** A Boolean value that indicates whether the "main part" of the USs is partially redundant.

**Benefit Part Fully Redundant:** A Boolean value that indicates whether the "benefit part" of the USs is fully redundant.

**Benefit Partially Redundant:** A Boolean value that indicates whether the "benefit part" of the USs is partially redundant.

- **checkPartialRedundancy:** The method processes these arrays to identify partial redundancy by checking whether elements from arrays of elements match elements from another array.

It receives the two arrays of elements as input, iterates through each element of the first input array and compares each of these elements with all elements in the

second input array. A match counter records how often elements from the first input array find a match in the second input array.

As output, method returns a Boolean value. True: indicates that there is at least one matching element pair between the two JSON arrays, which means partial redundancy. False: indicates that there are no matching elements, indicating no partial redundancy between these specific parts of the USs.

**Example 4.16.** Assume we have the following JSON arrays for two different USs:

*First JSON array: `[["login", "button"], ["help", "link"]]`*

*Second JSON array: `[["logout", "button"], ["help", "link"]]`*

*The method would determine that the second element of the first array ("help", "link") matches the second element of the second array. As there is at least one match, `checkPartialRedundancy` would return true, indicating partial redundancy.*

- `getJSONArraySafely`: This method is designed to handle JSON operations safely by retrieving JSON array from a JSON object without the risk of throwing exceptions if the specified key does not exist.

As input it receives the JSON object from which the JSON array needs to be extracted and a key corresponding to the JSON array within the provided JSON object.

The method first checks whether the provided key exists in the JSON object. If the key exists, it retrieves the JSON array associated with that key. If the key does not exist, it returns an empty JSON array.

**Example 4.17.** Let's assume that a JSON object representing USs details should contain the key for "Benefit Part", which does not exist:

```
{
  "Common Targets" : {
    "Main Part" : [ ["login", "button"], ["help", "link"] ]
  }
}
```

*If the "Benefit Part" in the "Common Targets" needs to be accessed that does not exist, this is handled safely with `getJSONArraySafely` by returning an empty array to avoid runtime errors.*

- `readJsonArrayFromFile`: The method enables JSON data to be read from a file and converted into a JSON array object. It takes the file path as input and attempts to open the file, checking whether the file is empty or missing. If the file is available and contains data, this data is read, converted into a JSON array object and returned.

## Error Handling

There were erroneous data in datasets that force us to handle them correctly. Therefore, we implement/use the following exceptions to accurately distinguish and handle them.

The following classes, which extend the *Exception* class, are used in the *org.henshin.backlog.code.rule* package and relate to error handling related to the JSON entries in the dataset of the backlogs and to the Ecore meta-model required to create the rules based on it:

- EmptyOrNotExistJsonFile: Is triggered if the JSON file could not be found in the file system.
- ActionInJsonFileNotFound: Is triggered if the entry *Action*, which contains *Primary/Secondary Actions*, is not present in the JSON file and its absence should be reported.
- EntityInJsonFileNotFound: Is triggered if the entry *Entity*, which contains *Primary/Secondary Entity*, is not present in the JSON file and its absence should be reported.
- PersonaInJsonFileNotFound: Is triggered if the entry *Persona* does not exist in the JSON file for a specific US.
- TextInJsonFileNotFound: Is triggered if the entry *Text* does not exist in the JSON file for a specific US.
- UsNrInJsonFileNotFound: Is triggered if the entry *Us\_Nr* does not exist in the JSON file for a specific US.
- EdgeWithSameSourceAndTarget: Refers to the creation of edges in graph transformation rules and is triggered if the source and target of the edge have already been created, then the duplicate edge should be avoided.
- TargetsInJsonFileNotFound: Is triggered if the entry *Targets* does not exist in the JSON file for a specific US.
- ContainsInJsonFileNotFound: Is triggered if the entry in *Contains* is not present as *Primary/Secondary Entity* in the JSON file and its absence should be reported.
- TriggersInJsonFileNotFound: Is triggered if the entry *Triggers* does not exist in the JSON file for a specific US.
- EcoreFileNotFound: Is triggered if the required ECore meta-model file could not be found and should also be reported.

Within the *org.henshin.backlog.code.report* package, special classes that extend the *Exception* class are designed to solve problems related to the CDA report directory, which encapsulates all US-pairs together with the associated conflict reasons. These classes include:

- `CdaReportDirIsEmpty`: This exception is called if the CDA report directory is found but has no content.
- `CdaReportDirIsNotADirectory`: This exception is thrown in scenarios where the path provided for the CDA report directory is either not a directory (e.g. it is a file) or the specified path does not lead to a directory.
- `CdaReportDirNotFound`: This exception is triggered if the CDA report directory cannot be found within the specified path.

## Limitations

There are technical limitations that are causing us to change our implementation strategy. The following limitations should be clarified at the beginning:

- Use Eclipse version 2023-03, as Henshin version 4 cannot be installed with the latest version of Eclipse.
- Working with Java as the programming language, as the Henshin and CDA APIs are only available in the Java programming language.
- CDA API is not yet implemented to take into account conflicts and dependencies for attributes that are crucial for our approach. This forces us to use the CDA graphical user interface(GUI) instead of the CDA API.
- Lack of Henshin documentation regarding methods and classes, which makes it time consuming to understand the methods and make the right decision.

## 4.4 Test

In this section, we aim to validate certain functionalities, check the system requirements and ensure reliability and robustness of implemented classes and methods.

As a test strategy, we perform unit tests with *JUnit* version 4<sup>23</sup> as version 4 is more suitable and compatible with Eclipse version 2023-03.

EclEmma<sup>24</sup> as a code coverage tool integrated into the Eclipse IDE is used, to ensure thorough testing and coverage. By using EclEmma, we were able to systematically measure the effectiveness of our test suites and determine the test coverage for each individual class.

## Configuration of Test Environment

In the main project *org.henshin.backlog*, we create a separate package called *org.henshin.backlog.test*. This package contains two Java classes namely *ReportExtractorTest.java* and *RuleCreator\_Test.java*, each of which corresponds to the Java source codes accordingly.

---

<sup>23</sup><https://junit.org/junit4/>

<sup>24</sup><https://www.eclEmma.org/>

## Scope of Testing

The scope of the test depends on the system requirements and the two most important implemented classes *ReportExtractorTest.java*, *RuleCreator\_Test.java*, *Evaluation.java* and their methods. The implemented error handling classes are also tested.

## Test Cases and their Code Coverage

We describe the specific test cases that are performed during the tests. Each test case contains a description of the test scenario, the data provided and the expected result. For refining and improving our test cases, we used a code coverage report created by EclEmma in order to increase coverage and ensure a more reliable, error-resistant application.

Table 20 shows the test cases for the RuleCreator.java class and Figure 59 shows the code coverage.

Test Case	Supplied Data	Expected Outcome	Description
testAssignCmodule	Assing a dummy ECore model file	Through an exception: <i>EcoreFileNotFound</i>	Check whether the ECore model already exists and CModule is correctly assigned
ActionNotExist (test-Process.JsonFile)	JSON file with a US without "Action" entry	Through an exception: <i>ActionInJsonFileNotFound</i>	Check whether there is an entry "Action" in the related US in JSON file
EntityNotExist (testProcess.JsonFile)	JSON file with a US without "Entity" entry	Through an exception: <i>EntityInJsonFileNotFound</i>	Check whether there is an entry "Entity" in the related US in JSON file
PersonaNotExist (test-Process.JsonFile)	JSON file with a US without "Persona" entry	Through an exception: <i>PersonaInJsonFileNotFound</i>	Check whether there is an entry "Persona" in the related US in JSON file
TargetsNotExist (test-Process.JsonFile)	JSON file with a US without "Targets" entry	Through an exception: <i>TargetsInJsonFileNotFound</i>	Check whether there is an entry "Targets" in the related US in JSON file
ContainsNotExist (test-Process.JsonFile)	JSON file with a US without "Contains" entry	Through an exception: <i>ContainsInJsonFileNotFound</i>	Check whether there is an entry "Contains" in the related US in JSON file
ContainsInTargets (test-ProcessContainsEdges)	JSON file with a US which the entity in "Contains" entry also belong to Targets	The entity in Contains should be annotated as <Delete>	Check whether entity in Targets have connection as Contains, if so entity in Contains should also annotated as <Delete>
TriggersNotExist (test-Process.JsonFile)	JSON file with a US without "Triggers" entry	Through an exception: <i>TriggersInJsonFileNotFound</i>	Check whether there is an entry "Triggers" in the related US in JSON file
DuplicateTriggers (test-ProcessContainsEdges)	JSON file with a US with duplicate Triggers entries	Through an exception: <i>EdgeWithSameSourceAndTarget</i>	Verify whether there is duplicated entries in Triggers JSON-array

Test Case	Supplied Data	Expected Outcome	Description
TextNotExist (testProcessJsonFile)	JSON file with a US without “Text” entry	Through an exception: <i>TextInJsonFileNotFound</i>	Check whether there is an entry “Text” in the related US in JSON file
UsNrNotExist (testProcessJsonFile)	JSON file with a US without “Us_Nr” entry	Through an exception: <i>UsNrInJsonFileNotFound</i>	Check whether there is an entry “US_Nr” in the related US in JSON file
UndefinedEntity (testProcessContainsEdges)	Specify an entity that is not contained as “Entity” in the JSON file, but appears as “Contains”	Through an exception: <i>EntityInJsonFileNotFound</i>	Check whether the entity that appears in the <i>Contains</i> entry has already been identified as an entity
PrimaryActionNotFound (testProcessTargetsEdges)	Specify a primary action that is not contained as “Primary Action” in the JSON file, but appears as “Targets”	Through an exception: <i>ActionInJsonFileNotFound</i>	Check whether the primary action that appears in the <i>Targets</i> entry has already been identified as a primary action
PrimaryEntityNotFound (testProcessTargetsEdges)	Specify a primary entity that is not contained as “Primary Entity” in the JSON file, but appears as “Targets”	Through an exception: <i>EntityInJsonFileNotFound</i>	Check whether the primary entity that appears in the <i>Targets</i> entry has already been identified as a primary entity
SecondaryActionNotFound (testProcessTargetsEdges)	Specify a secondary action that is not contained as “Secondary Action” in the JSON file, but appears as “Targets”	Through an exception: <i>ActionInJsonFileNotFound.class</i>	Check whether the secondary action that appears in the <i>Targets</i> entry has already been identified as a secondary action
SecondaryEntityNotFound (testProcessTargetsEdges)	Specify a secondary entity that is not contained as “Secondary Entity” in the JSON file, but appears as “Targets”	Through an exception: <i>EntityInJsonFileNotFound.class</i>	Check whether the secondary entity that appears in the <i>Targets</i> entry has already been identified as a secondary entity
UndefinedEntity (testProcessTargetsEdges)	Specify an entity that is not contained as “Entity” in the JSON file, but appears as “Targets”	Through an exception: <i>EntityInJsonFileNotFound</i>	Check whether the entity that appears in the <i>Targets</i> entry has already been identified as an entity
ActionNotFound	Provision of a JSON file that contains actions in <i>Targets</i> that are not entered in primary/secondary action	Through an exception: <i>EntityInJsonFileNotFound</i>	Verify whether the action that appear in the <i>Targets</i> entry has already been identified as an action
ReadJsonArrayFromFile	Assign a dummy JSON file	Through an exception: <i>EmptyOrNotExistJsonFile</i>	Check whether the JSON file already exists
EmptyOrNotExistJsonFile	Assign an empty JSON file	Through an exception: <i>EmptyOrNotExistJsonFile</i>	Check whether the JSON file is empty

Table 11: Test cases for RuleCreator class

Table 21 shows the test cases for the ReportExtractor.java class and Figure 60 shows



## RuleCreator

Element	Missed Instructions	Cov.	Missed Branches	Cov.	Missed	Cxty	Missed	Lines	Missed	Methods
main(String[])	1	0 %		n/a	1	1	3	3	1	1
processJsonFile(JSONArray)		100 %		100 %	0	10	0	53	0	1
processEntities(JSONObject_CRule_JSONObject_JSONArray_Map_String)		100 %		100 %	0	7	0	31	0	1
processActions(JSONObject_CRule_JSONObject_CNode_Map_String)		100 %		100 %	0	5	0	21	0	1
processTargetsEdges(JSONObject_JSONArray_Map_Map_String)		100 %		100 %	0	4	0	18	0	1
processContainsEdges(JSONObject_JSONArray_Map_Map_String)		100 %		90 %	1	6	0	15	0	1
createRules(String)		100 %		n/a	0	1	0	7	0	1
processPerson(JSONObject_JSONArray_CRule_String)		100 %		n/a	0	1	0	4	0	1
processText(JSONObject_CRule_String)		100 %		n/a	0	1	0	4	0	1
readJSONArrayFromFile()		100 %		100 %	0	2	0	6	0	1
getJsonFileAbsolutePath()		100 %		100 %	0	2	0	4	0	1
checkEntityIsTarget(String_JSONArray)		100 %		100 %	0	3	0	6	0	1
getEcoreFileAbsolutePath()		100 %		100 %	0	2	0	4	0	1
assignCmodule()		100 %		100 %	0	2	0	5	0	1
RuleCreator(String_String_String)		100 %		n/a	0	1	0	5	0	1
processRule(JSONObject_String_CModule)		100 %		n/a	0	1	0	2	0	1
getJsonFile()		100 %		n/a	0	1	0	1	0	1
getHenshinFile()		100 %		n/a	0	1	0	1	0	1
getEcoreFile()		100 %		n/a	0	1	0	1	0	1
Total	5 of 923	99 %	1 of 66	98 %	2	52	3	191	1	19

Figure 36: Code coverage related to class RuleCreator

the code coverage.

Test Case	Supplied Data	Expected Outcome	Description
testEmptyDirectroy	Assing a dummy direc- tory	Through an excep- tion: <i>CdaReport- DirIsEmpty.class</i>	Check if CDA Report di- rectory is empty
testEmptyJSONFile	Assing an empty JSON dataset file	Through an exception: <i>EmptyOrNotExistJson- File</i>	Check if JSON dataset file is empty
testCdaDirNotDirectroy	Assing a file instead of CDA directory	Through an excep- tion: <i>CdaReportDirIsNotA Directory</i>	Check if assigned path is a directory
testCdaDirectroy	Assing a not readable di- rectory	Through an excep- tion: <i>CdaReportDir NotFound</i>	Check whether CDA di- rectory is accessible
testFinalReportDir	Assign an empty dataset directory	Return <i>false</i> if the as- signed directory is empty	Check if directory of datasets are empty
testMinimalEcoreExist	Assign a CDA direc- tory without minimal- ecore file	Return <i>false</i> if the minimal-ecore file not found	Check whether the Ecore file already exist in CDA directory
testWriteTable	Provide a CDA report for a US-pair	A table should be created in the report file	Check whether the table for US-pairs has already been created
completeMajorElements Edge (testExtractReports)	Provision of a CDA re- port for US-pair with ex- actly one “Targets” edge	Inclusion of this US-pair in the text report with the nodes “Action”, “En- tity” and “Targets” edge	Verifies <i>extractReports</i> method when all major elements are present in the CDA report
completeMajorElements Upper Edge (testExtractReports)	Provide a CDA report for a US-pair with at least one “Targets” edge and redundancy ele- ments such as Triggers	Generated textual report contains information about Secondary Enti- ties, Secondary Actions, Targets, and Triggers	Verifies <i>extractReports</i> method when all major elements are present in the CDA report and the upper edge case is reached

Test Case	Supplied Data	Expected Outcome	Description
notCompleteMajorElements (testExtractReports)	Provide a CDA report for a US-pair without “Targets” edge, but with action and entity	The US-pair should not reported	Verifies the behavior of the <i>extractReports</i> method when not all major elements are present in the input data
getBenefitPartRedundanciesElements (testExtractReports)	Provision of a CDA report for a US-pair that only contains redundancy clauses in the “Benefit” part	Check whether the count of redundancy clauses in the benefit part of the USs matches the value “Benefit Part Redundancy Clause” specified in the JSON_Report file	Verifies the behaviour of the <i>extractReports</i> method when there are redundancy elements in the benefit part of USs
getMainPartRedundanciesElements (testExtractReports)	Provision of a CDA report for a US-pair that only contains redundancy clauses in the “Main” part	Check whether the count of redundancy clauses in the main part of the USs matches the value “Main Part Redundancy Clause” specified in the JSON_Report file	Verifies the behaviour of the <i>extractReports</i> method when there are redundancy elements only in the main part of USs
getTotalRedundancyElements (testExtractReports)	Provision of a CDA report for a US-pair that contains redundancy clauses in the “Main” and “Benefit” parts	Check whether the count of redundancy clauses in the main and benefit parts of the USs matches the value “Total Redundancy Clause” specified in the JSON_Report file	Verifies the behaviour of the <i>extractReports</i> method when there are redundancy elements in the main and benefit parts of USs
highlightPersona (testExtractReports)	Providing a CDA report for a US-pair with redundancy clause in “Triggers” edge (from Persona to Primary Action)	The persona should only be marked with hash symbol if there is a redundant clause in the main part	Checks the behaviour of the <i>extractReports</i> method when highlighting redundant persona in USs
BenefitInBothUss (testhighlightRedundancies)	Provision of a CDA report for a US-pair where both USs have the “benefit” part	Search both the main and the benefit parts of USs and mark redundancy clauses with a hash symbol if they occur	Verifies the behaviour of the <i>highlightRedundancies</i> method when both USs have benefit part
noBenefitInBothUss (testhighlightRedundancies)	Provision of a CDA report for a US-pair where both USs do not have the “benefit” part	Search only the main part of USs and mark redundancy clauses with a hash symbol	Verifies the behaviour of the <i>highlightRedundancies</i> method when both USs don’t have benefit part
noBenefitInUs1 (testhighlightRedundancies)	Provision of a CDA report for a US-pair where only the second US have the “benefit” part	Search only the main part of USs and mark redundancy clauses with a hash symbol	Verifies the behaviour of the <i>highlightRedundancies</i> method when only the second US have benefit part
noBenefitInUs2 (testhighlightRedundancies)	Provision of a CDA report for a US-pair where only the first US have the “benefit” part	Search only the main part of USs and mark redundancy clauses with a hash symbol	Verifies the behaviour of the <i>highlightRedundancies</i> method when only the first US have benefit part

Test Case	Supplied Data	Expected Outcome	Description
ContainInBenefitPart (testHighlightRedundancies)	Provide a CDA report for a US-pair with redundancy clauses of “Contains” within “Benefit” part	The entities included in Contains should be marked with hash symbol	Checks the behaviour of the <i>highlightRedundancies</i> method when highlighting redundant entities included in the Contains
ContainInMainPart (testHighlightRedundancies)	Provide a CDA report for a US-pair with redundancy clauses of “Contains” within “Main” part	The entities included in Contains should be marked with hash symbol	Checks the behaviour of the <i>highlightRedundancies</i> method when highlighting redundant entities included in the Contains
TargetsInMainPart (testHighlightRedundancies)	Provide a CDA report for a US-pair with redundancy clauses with more than one “Targets” within the “Main” part	Founded redundancy clauses should also be marked with a hash symbol, if the main part contains more than one redundancy clause as Targets	Check the behaviour of the <i>highlightRedundancies</i> method if there is more than one redundancy clause as Targets in main part
TargetsInBenefitPart (testHighlightRedundancies)	Provide a CDA report for a US-pair with redundancy clauses with more than one “Targets” within the “Benefit” part	Founded redundancy clauses should also be marked with a hash symbol, if the benefit part contains more than one redundancy clause as Targets	Check the behaviour of the <i>highlightRedundancies</i> method if there is more than one redundancy clause as Targets in benefit part

Table 12: Test cases for ReportExtractor class

Table 22 shows the test cases for the Evaluation.java class and Figure 61 shows the code coverage.

Test Case	Supplied Data	Expected Outcome	Description
testEmptyOrNotExist JsonFile	Provision of a dummy JSON file	Through an exception: <i>EmptyOrNotExist JsonFile</i>	Check whether the provided JSON file already exists and is not empty
testJsonFile	Provision of a JSON file which is not accessible	Through an exception: <i>IOException</i>	Check whether the provided JSON file is accessible
main/benefitFull_Case1	Provide a JSON file with US-pair that have no common textitContains entries but have common <i>Targets</i> entries in main/benefit part	In JSON report the entry “Main/Benefit Part Fully Redundant” should be <i>true</i>	Check whether US-pair without <i>Contains</i> entries can also be fully redundant in main/benefit part
main/benefitFull_Case2	Provide a JSON file with US-pair that have not common textitContains entries but one US has entries as Contains in main/benefit	In JSON report the entry “Main/Benefit Part Fully Redundant” should be <i>true</i>	Check whether US-pair without common <i>Contains</i> entries can also be fully redundant in main/benefit part

Test Case	Supplied Data	Expected Outcome	Description
main/benefitFull_Case3	Provide a JSON file with US-pair that have common textitContains entries but one US have additional entries as Contains in main/benefit part	In JSON report the entry "Main/Benefit Part Fully Redundant" should be <i>true</i>	Check whether USs with additional <i>Contains</i> entries from common contains can also be fully redundant in main/benefit part
main/benefitFull_Case4	Provide a JSON file with US-pair that have exactly common textitContains entries as well as common <i>Targets</i> in main/benefit part	In JSON report the entry "Main/Benefit Part Fully Redundant" should be <i>true</i>	Check whether USs with <i>Contains</i> and <i>Targets</i> entries can also be fully redundant in main/benefit part
mainBenefitFull	Provide a JSON file with US-pair that all clauses in the main and benefit parts are identical	The JSON report the entries "Main Part Fully Redundant" and "Benefit Part Fully Redundant" should be <i>true</i>	Check that all clauses in the main and benefit part are identical, main and benefit part are evaluated as fully redundant
mainPartial_Case1	Provide a JSON file with a US-pair whose entries in <i>Targets</i> are partially identical	In the JSON report, the entry "Main Part Partially Redundant" should be <i>true</i>	Check whether USs with partially redundant entries in <i>Targets</i> are evaluated as partially redundant
mainPartial_Case2	Provide a JSON file with a US-pair whose entries in <i>Contains</i> are partially identical	In the JSON report, the entry "Main Part Partially Redundant" should be <i>true</i>	Check whether USs with partially redundant entries in <i>Contains</i> are evaluated as partially redundant
benefitParial	Provide a JSON file with US-pair where only some clauses in <i>Targets</i> and <i>Contains</i> entries are common	In the JSON report, the entry "Benefit Part Partially Redundant" should be <i>true</i>	Check whether USs with partially common <i>Targets</i> and <i>Contains</i> entries are evaluated as partially redundant
mainFullBenefitPartial	Provide a JSON file with US-pair where all clauses in the main part and some in the benefit part are identical	In the JSON report, the entry "Main Part Fully Redundant" and "Benefit Part Partially Redundant" should be <i>true</i>	Check whether the main part is evaluated as fully redundant if all clauses are identical and the benefit part is evaluated as partially redundant if some clauses are identical
mainPartialBenefitFull	Provide a JSON file with US-pair where some clauses in the main part and all in the benefit part are identical	In the JSON report, the entry "Main Part Partially Redundant" and "Benefit Part Fully Redundant" should be <i>true</i>	Check whether the main part is evaluated as partially redundant if some clauses are identical and the benefit part is evaluated as fully redundant if all clauses are identical

Table 13: Test cases for Evaluation class

## ReportExtractor

Element	Missed Instructions	Cov.	Missed Branches	Cov.	Missed	Cxty	Missed	Lines	Missed	Methods
splitUsText(String,String,String,String,FileWriter,JSONObject)		100 %		100 %	0	9	0	27	0	1
reportExtractor(String[])		100 %		100 %	0	2	0	15	0	1
createTable(List,List)		100 %		100 %	0	4	0	13	0	1
getAbsolutePath(Path)		100 %		100 %	0	6	0	15	0	1
getUsTexts(String,RedundancyItems)		100 %		100 %	0	4	0	13	0	1
hasActions(ArrayList,RedundancyItems)		100 %		100 %	0	6	0	8	0	1
hasEntities(ArrayList,RedundancyItems)		100 %		100 %	0	6	0	8	0	1
applyHashSymbols(String,String[])		100 %		100 %	0	2	0	4	0	1
getTotalRedundanciesFromPair(List,String,String)		100 %		100 %	0	6	0	6	0	1
checkIfReportExist(String,List)		100 %		100 %	0	2	0	7	0	1
hasTargets(ArrayList,RedundancyItems)		100 %		100 %	0	4	0	5	0	1
minimalCoreExist(String,String)		100 %		100 %	0	2	0	4	0	1
getAllTargetsInBenefit(String,String,String,JSONObject)		100 %		100 %	0	2	0	8	0	1
getAllContainsInBenefit(String,String,String,JSONObject)		100 %		100 %	0	2	0	8	0	1
getAllTargetsInMain(String,String,String,JSONObject)		100 %		100 %	0	2	0	7	0	1
getAllContainsInMain(String,String,String,JSONObject)		100 %		100 %	0	2	0	7	0	1
getAbsolutePathFinalReportDir()		100 %		100 %	0	2	0	4	0	1
readJsonArrayFromFile(String)		100 %		100 %	0	2	0	6	0	1
processElements(String,String,String,JSONObject)		100 %		100 %	0	3	0	4	0	1
getFinalReportDir(Path)		100 %		100 %	0	2	0	4	0	1
hasMoreThanFourHashSymbols(String)		100 %		100 %	0	2	0	2	0	1
containsAnd(String)		100 %		100 %	0	2	0	3	0	1
lambda\$0\$0(int)		100 %		100 %	0	2	0	1	0	1
lambda\$2\$0(int)		100 %		100 %	0	2	0	1	0	1
highlightRedundancies(RedundancyItems,String,List,List,JSONObject)		87 %		87 %	3	13	0	104	0	1
getCommonTargets(String,JSONObject)		87 %		87 %	4	17	0	69	0	1
getCommonContains(String,JSONObject)		87 %		87 %	4	17	0	68	0	1
writeTable(File,List)		87 %		87 %	2	9	0	28	0	1
iteratePackages(EPackage,ArrayList,ArrayList,RedundancyItems)		85 %		85 %	4	16	0	32	0	1
getCommonTriggers(String)		81 %		81 %	4	12	0	27	0	1
extractReports(FileWriter,FileWriter)		80 %		80 %	6	16	0	59	0	1
applyHashSymbolTargetsMain(List,List,RedundancyItems,String,String,JSONObject)		75 %		75 %	3	7	0	27	0	1
applyHashSymbolContainsMain(List,RedundancyItems,String,String,JSONObject)		70 %		70 %	3	6	0	21	0	1
applyHashSymbolTargetsBenefit(List,List,RedundancyItems,String,String,JSONObject)		66 %		66 %	4	7	2	26	0	1
applyHashSymbolPersonal(List,RedundancyItems,String,String)		66 %		66 %	2	4	0	13	0	1
processMinimalModels(File,ArrayList,ArrayList,RedundancyItems)		60 %		60 %	4	6	0	11	0	1
applyHashSymbolContainsBenefit(List,RedundancyItems,String,String,JSONObject)		58 %		58 %	5	7	2	23	0	1
createOrOverwriteReportFile(File)		50 %		50 %	1	2	2	6	0	1
hasMoreThanSixHashSymbols(String)		50 %		50 %	1	2	0	2	0	1
main(String[])		0 %		n/a	1	1	2	2	1	1
writeUsText(String,ArrayList,List,RedundancyItems,FileWriter,List,List,JSONObject)		100 %		n/a	0	1	0	17	0	1
getRedundancyStatus(RedundancyItems)		100 %		n/a	0	1	0	5	0	1
writeUsSentencePart(String,RedundancyItems,FileWriter,JSONObject)		100 %		n/a	0	1	0	6	0	1
getClassName(String)		100 %		n/a	0	1	0	2	0	1
ReportExtractor(String,String)		100 %		n/a	0	1	0	4	0	1
getRefName(String)		100 %		n/a	0	1	0	2	0	1
getAttName(String)		100 %		n/a	0	1	0	2	0	1
getUsName1(String)		100 %		n/a	0	1	0	1	0	1
getUsName2(String)		100 %		n/a	0	1	0	1	0	1
getDirName()		100 %		n/a	0	1	0	1	0	1
getJsonDatasetFile()		100 %		n/a	0	1	0	1	0	1
Total	35 of 3 863	99 %	50 of 357	85 %	51	231	8	738	1	51

Figure 37: Code coverage related to class ReportExtractor

## 4.5 Evaluation

In this section, we address two different research questions and provide a detailed explanation of the experimental design and execution for each question. We also present a detailed analysis of the results to provide answers to these research questions, highlight their implications and provide insights into the research findings.

### Research Questions

The research questions addressed in this section are as follows:

1. Does our tool reliably determine the level of redundancy —either partial or full— between different parts of USs (main and benefit)?
2. How does the tool’s performance scale when the number of USs in a backlog increases?

## Evaluation

Element	Missed Instructions	Cov.	Missed Branches	Cov.	Missed Cxty	Missed Lines	Missed Methods
• <a href="#">evaluateRedundancyCriteria(JSONObject_String_String)</a>	<div><div></div></div>	98 %	<div><div></div></div>	79 %	30 76	0 99	0 1
• <a href="#">checkFullRedundancy(JSONArray_JSONArray)</a>	<div><div></div></div>	94 %	<div><div></div></div>	70 %	3 6	0 12	0 1
• <a href="#">checkPartialRedundancy(JSONArray_JSONArray)</a>	<div><div></div></div>	100 %	<div><div></div></div>	100 %	0 8	0 14	0 1
• <a href="#">readJSONArrayFromFile(String)</a>	<div><div></div></div>	100 %	<div><div></div></div>	100 %	0 2	0 8	0 1
• <a href="#">getJSONArraySafely(JSONObject_String)</a>	<div><div></div></div>	100 %	<div><div></div></div>	100 %	0 2	0 1	0 1
• <a href="#">Evaluation()</a>	<div><div></div></div>	100 %	n/a	0 1	0 2	0 1	0 1
Total	8 of 613	98 %	34 of 178	80 %	33 95	0 136	0 6

Figure 38: Code coverage related to class Evaluation

## Methodology

To address the first questions "Does our tool reliably determine the level of redundancy—either partial or full—between different parts of USs (main and benefit)?" we recap the methodology employed to analyse redundancy between USs. We utilized a systematic approach that involved several key steps:

- **Data Collection:** For a comprehensive assessment, we applied our approach to 19 backlog datasets presented by Mosser et al.<sup>25</sup>. They applied the Doccano approach to these publicly available requirements datasets[10].

It is also worth noting that some backlog datasets (g02, g13, g17, g27) did not follow the expected sentence structure, which is why we did not include them in the evaluation results to avoid unexpected behaviour. Table 23 shows the project number of each dataset and the count of USs.

Item	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	
Project Nr.	g03	g04	g05	g08	g10	g11	g12	g14	g16	g18	g19	g21	g22	g23	g24	g25	g26	g27	g28	Total USs
Total USs	57	51	53	66	97	73	54	67	66	102	137	69	83	56	53	100	100	114	60	1458

Table 14: Project number and count of USs contained in each backlog dataset

- **Identification of main and benefit parts:** Each US was divided into its main part, which is the core functionality, and its benefit part, which describes the value to the persona.
- **Detection of overlapping clauses:** Recognition of overlapping clauses between a US-pair in a specific part of the USs.
- **Redundancy analysis in main and benefit parts:** Based on the redundant clauses identified, an automatic redundancy analysis was performed for the main and benefit parts of the US-pair based on certain criteria indicating the level of redundancy (partial or full) in the main and benefit parts.

<sup>25</sup><https://github.com/ace-design/nlp-stories>

## Ground Truth Evaluation of US Redundancy

Answering the first research question requires our automated system to have a reference point against which its accuracy can be measured. This reference point or "ground truth" is derived from a personal assessment and serves as a benchmark for the tool's performance.

In contrast to the tool evaluation, we did not evaluate based on labels (e.g., action, entity, persona, targets, etc.) in the personal evaluation. This means that when evaluating ground truth, we evaluate partial and full redundancy based on the phrases occurring in a given part as a one-to-one comparison.

The ground truth is the final assessment against which automated results are compared. It is derived from the personal judgement of a subject matter expert (in this case myself) using a combination of expertise, experience and specific evaluation criteria. The personal assessment is targeted at providing a reliable and accurate reference for redundancy between USs.

The following criteria were taken into account in the personal assessment:

- A US-pair is evaluated as fully redundant in the main part, if all phrases occurred in the main parts of both USs fully overlap with one-to-one comparison. For example, the following US-pair is assessed as fully redundant:  
user\_story\_01: "#g14# as a #publisher#, i want to #publish# a #dataset#, so that i can view just the dataset with a few people."  
user\_story\_02: "#g14# as a #publisher#, i want to #publish# a #dataset#, so that i can share the dataset publicly with everyone."
- A US-pair is considered fully redundant in the main part, if all phrases in the main part of at least one US completely overlap. For instance:  
user\_story\_22: "#g14# as a #consumer#, i want to #view# a #data package# online, so that i can #get# a #sense# of whether this is the dataset i want."  
user\_story\_24: "#g14# as a #consumer#, i want to #view# the #data package#, so that that i can #get# a #sense# of whether i want this dataset or not."
- A US-pair is categorised as partially redundant in the main part if some phrases remain distinctive between the USs. For Instance:  
user\_story\_09: "#g04# as a #user#, i want to be able to #view# a #map display# of the public recycling bins around my #area#."  
user\_story\_10: "#g04# as a #user#, i want to be able to #view# a #map display# of the special waste drop off sites around my #area#."
- The criteria mentioned were also applied to the benefit part.

Table 24 shows the aggregation of full and partial redundancies in the main and benefit parts as ground truth. As we can see, the main parts of the US-pairs have less full redundancy (15 cases), which means that there are 15 cases where the main part of the

Project Nr.	G03	G04	G05	G08	G10	G11	G12	G14	G16	G18	G19	G21	G22	G23	G24	G25	G26	G27	G28	Grand Total
Main Partial		2	15	17	13	8	2	5	2	159	512	13	26	6	10	38	9	7	31	875
Main Full								2	1	4		1	3			2		2		15
Benefit Partial	2	1	2	5		6	1	6		3		2	10		1		1	2		42
Benefit Full		1	14	18	3	3	1	1		3		3	13		4			1		65

Table 15: Detail about full and partial redundancies related to main or benefit parts as ground truth

US-pairs is exactly the same. This level of redundancy indicates common functionality of the US-pairs, which is a sign of overlapping features.

A much higher occurrence of partial redundancy in the main parts(875 cases) indicates that there are common elements between the US-pairs, but still enough differences to avoid a complete match.

Fewer instances of partial redundancy in the benefit parts (42 cases) indicate that the USs diverge in their benefit clauses, they are more tailored to specific project outcomes.

The higher count of full redundancies (42 cases) compared to partial redundancies in the benefit parts is interesting, as it indicates that the expected objectives of certain features are often repeated in the USs. This suggests that the project is aiming for a set of common goals regardless of the specific functionality.

### Evaluation of US Redundancy using Tool

The automated tool is designed to identify redundancy among USs based on predefined criteria. It operates by analysing the text and structure of USs to detect similarities that could indicate redundancy.

In contrast to ground truth, which is based on one-to-one comparison of phrases in specific parts of USs, tool evaluation relies heavily on specified labelling (targets, triggers, contains) using the Doccano tool.

The following criteria are defined for the evaluation of US-pairs:

- Full redundancy: A pair of US is considered to have "full redundancy" in the main or benefit part when every labelled clause in that part—comprising triggers (in the main part), targets, and contains—is syntactically identical.
- Partial redundancy: When only some labelled clauses, such as targets, have significant overlap but are not completely identical. This means that while certain labelled clauses, such as targets, may match between USs, other labelled clauses, such as triggers or contains, may differ, meaning that the USs are not fully redundant. This scenario suggests that while USs have significant similarities, they still contain unique aspects.

Table 25 shows the aggregation of the full and partial redundancies in the main and benefit parts assessed by the tool. It is also worth noting that the numbers highlighted in red show the variation in the ground truth evaluation.



Project Nr.	G03	G04	G05	G08	G10	G11	G12	G14	G16	G18	G19	G21	G22	G23	G24	G25	G26	G27	G28	Grand Total
Main Part Partial		2	14	17	13	8	1	5	2	159	477	13	26	5	10	31	9	7	27	826
Main Part Full			1				1	2	1	4	35	1	3	1		9		2	4	64
Benefit Partial	1		1	2		6	1	3		3		2	10		1			1		31
Benefit Full	1	2	15	21	3	3	1	4		3		3	13		4		1	2		76

Table 16: Aggregation of the count of full and partial redundancies in relation to the main or benefit parts assessed by the tool

**Assessment of Result: High-Level Overview** Based on the datasets provided, it was found that 1,851 redundancy clauses were identified across all projects, with the highest count found in the backlog G19 dataset (925 clauses), indicating a significant presence of redundancy in the USs of this project.

Table 26 shows the total number of redundancy clauses found in each dataset.

Project Nr.	G03	G04	G05	G08	G10	G11	G12	G14	G16	G18	G19	G21	G22	G23	G24	G25	G26	G27	G28	Grand Total
Main Part Redundancy Clauses	0	4	30	31	25	11	4	11	5	274	925	24	67	12	24	89	18	19	90	1663
Benefit Part Redundancy Clause	2	2	31	64	5	9	2	7	0	9	0	7	38	0	8	0	1	3	0	188
Total Redundancy Clause	2	6	61	95	30	20	6	18	5	283	925	31	105	12	32	89	19	22	90	1851

Table 17: Detail about number of redundancy clauses occurred in main and benefit parts

**Assessment of Result: Aggregated Analysis** We also look for an aggregate for the count of redundant clauses in both the main and the benefit parts of the USs.

In the main parts, the large count of full redundancies, especially where two clauses are present (6 clauses), indicates a high degree of similarity in the functionalities described.

In the benefit part of the USs, there is a considerable count of cases where full redundancy prevails, especially where two clauses are inserted (24 clauses). The large count of full redundancies with two clauses indicates that benefits are often described in a standardised way in the different USs.

Figure 62 illustrates the aggregation of the count of redundancy clauses that occur in USs.

**Assessment of Result: Detailed Insights** In the dataset of Backlog G19, the clause “have alfred” was repeated in all USs, indicating that “alfred” is the end product and not a specific functionality. This suggests that the quality of the USs should be considered, so that they do not contain generic information that results in a lot of redundant information(false positives) being provided.

In the main parts of the USs, 1,663 clauses were redundant(“Main Part Redundancy Clauses” in Table 26), while only 188 redundancy clauses were found in the benefit parts(“Benefit Part Redundancy Clauses” in Table 26). This means that some USs are not often written in a standardised format for the description of core functions, resulting in a higher count of redundant clauses in the main part.

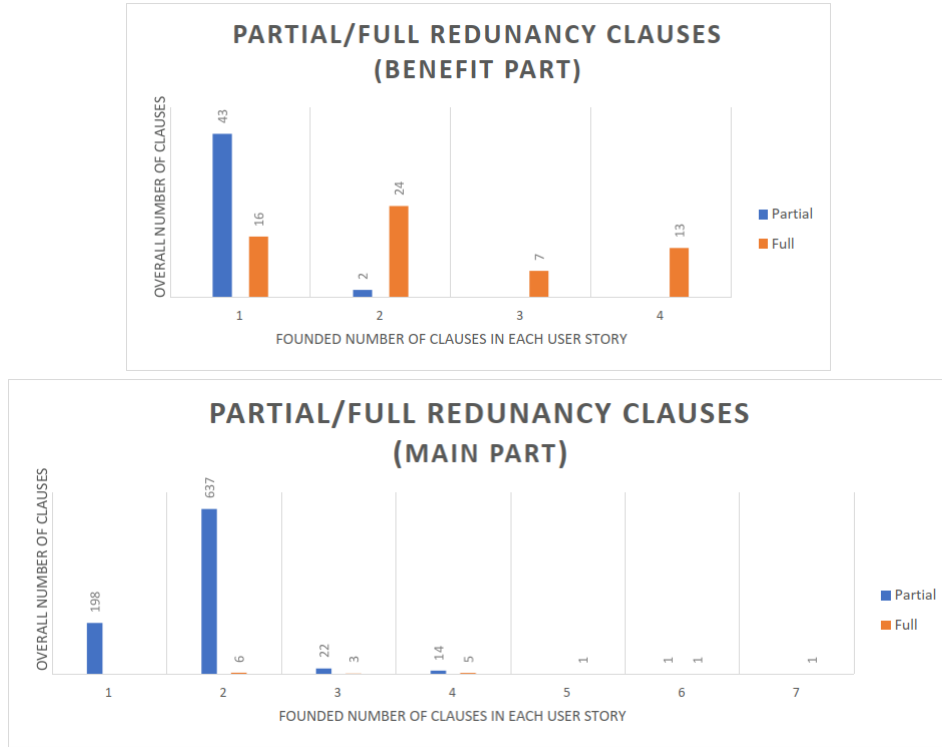


Figure 39: The aggregation between the count of redundancy clauses occurred in USs

**Example 4.18.** In the dataset of backlog G18 (274 clauses out of 283 in the main parts), for example, this is due to the clauses “have ability” in the main part, which are unnecessarily repeated in most USs:

*user\_story\_92: #g18# as a #researcher# I want to have #the #ability# to search files by file type and format.*

*user\_story\_80: #g18# as a #researcher# I want to have #the #ability# to attach standard metadata for behavioural observations (and video) so that my data can be searched and understood later.*

*Actually, the clause “have ability” in USs should be deleted and no redundancy should be possible at all:*

*user\_story\_92: #g18# as a researcher I want to search for files by file type and format.*

*user\_story\_80: #As a researcher, I want to attach standard metadata for behavioural observations (and videos), so that my data can be searched and understood later.*

There are also USs with the same functionality, but one provides more details about the functionality. In other words, one US is contained within another, and we refer to them as full redundant US-pairs, as deleting the US with less detail has no negative impact on the system. Sometimes it is necessary to merge these two USs to obtain a single detailed US.

**Example 4.19.** In the dataset of backlog G18, for example, we have two US-pairs

that are marked as full redundancy between *user\_story\_12* and *user\_story\_11* as well as *user\_story\_13* and *user\_story\_11*:

*user\_story\_12*: “#g18# as a #researcher#, I want to #upload# #files# prior to having them #attached# to a #log book page# using the web interface.”

*user\_story\_11*: “#g18# as a #researcher#, I want to #upload# #files# prior to having them #attached# to a #log book page#.”

*user\_story\_13*: “#g18# as a #researcher#, I want to #upload# #files# prior to having them #attached# to a #log book page# using a mapped network drive.”

As we can see, the *user\_story\_11* is an incomplete version of two other USs, and deleting it has no negative impact in the system, due to the fact that its goal is achieved and fulfilled by two other USs.

**Research question 1: Conclusion** After comparing the Ground Truth result with the result provided by our tool, the following realisation was made:

- Main Part Partial: A -5.6% (negative) percentage suggests that the Framework has fewer "Main Part Partial" counts than the Ground Truth. In this case, the Framework has about 5.6% fewer "Main Part Partial" counts than expected.
- Main Part Full: A high positive percentage of 326.67% indicates that the Framework has a significantly higher count of Main Part Full compared to Ground Truth. At 326.67%, the framework has more than three times as many main part full compared to the ground truth. In our investigation, we found that some phrases are not included as relationship (contains or targets) in the USs annotated with the Doccano tool. Therefore, our tool categorised some USs as fully redundant when in reality they were only partially redundant.
- Count of Benefit Partial: -26.19% a negative percentage here indicates that the Framework has fewer "Benefit Partial" counts compared to the Ground Truth. With -26.19%, the Framework has approximately one-quarter fewer "Benefit Partial" counts.
- Count of Benefit Full: 16.92% a positive percentage indicates that the Framework has more "Benefit Full" counts compared to the Ground Truth. With 16.92%, the Framework has almost 17% more "Benefit Full" counts than the Ground Truth.

It is also notable that if we add founded partial and full redundancies in main or benefit parts, we both amount are identical(main part: 890 cases , benefit part: 107).

This consistency indicates that the automated tool's results align with the ground truth, suggesting that the tool is reliable in detecting redundancy. It demonstrates that the tool's performance closely matches the personal assessment, reinforcing confidence in its accuracy and validity.

## Performance Evaluation

To answer the second research question "How does the tool's performance scale as the count of USs in a backlog increases?", we conducted a series of tests to measure the time it takes the tool to process different counts of USs. This section describes the testing methodology, the results obtained and the impact on the scalability of the tool.

**Test Methodology** To evaluate the tool's performance, we conducted a set of experiments in which the tool processed different numbers of USs in a backlog. The tests involved the following steps:

1. **Backlog Setup:** We used backlogs with varying numbers of USs around—50, 70, 90, 120 and 140—to simulate different workload sizes. Each backlog contained USs with varying content, redundancy elements, and complexity to represent a realistic range of cases. Table 27 shows information on the backlog data records provided for the performance test application.

US Information	Project Nr.	G04	G11	G10	G27	G19	Grand Total
	Number of US	51	73	97	114	137	472
	Number of Redundancy Clauses	6	20	30	22	925	1003

Table 18: Information on the backlog datasets provided for the application of the performance test

2. **Tool Execution:** Each part of toolchain(Rule creation, CDA tool, report creation and evaluation) was run for each backlog and the total time taken to process the entire backlog was recorded. The performance of the tool was measured by the processing time, i.e. the total time taken to process all USs in the backlog and identify redundancies.
3. **Repeating Tests:** To ensure reliability, each test was conducted multiple times, and the average processing time was calculated.

The test environment consisted of:

- Processor: Intel(R) Core(TM) i7-8565U CPU @ 1.80GHz (8 CPUs), 2.0GHz
- Memory: 8070MB RAM
- Display Devices: Intel(R) UHD Graphics 620, 4163 MB(Display Memory)
- Hard Disk: INTEL SSDPEKNW512G8H
- Operating System: Windows 11 Home 64-bit (10.0, Build 22631) (22621.ni\_release.220506-1250)
- System Type: 64-bit operating system, x64-based processor

Table 28 shows the result of tool's performance in seconds which were conducted on a controlled environment to ensure consistency.

<b>Test Result</b>	Project Nr.	G04	G11	G10	G27	G19	<b>Grand Total</b>
	Rule Creation	1,32	1,49	1,53	1,63	1,67	<b>7,64</b>
	CDA Tool	13,35	55,9	63,41	80,93	1221,49	<b>1435,08</b>
	Report Creation & Evaluation	3,69	17,46	17,86	33,91	2205,9	<b>2278,82</b>
	<b>Grand Total</b>	<b>18,36</b>	<b>74,85</b>	<b>82,8</b>	<b>116,5</b>	<b>3429,06</b>	<b>3721,54</b>

Table 19: Information about the result of the tool’s performance test, which was measured using the processing time in seconds.

**Research question 2: Conclusion** As we can see, there is a direct correlation between the number of USs in a backlog and the time our tool needs to process them. The results confirm that developers and project managers should expect a longer processing time when evaluating redundancy as the backlog grows.

However, the impact on processing time varies depending on the process in question. While rule creation using the Henshin API shows relatively consistent and lower processing times, other components such as the CDA tool and report creation processes show an exponential increase in processing time as the number of USs increases. This indicates that certain processes scale differently as the data load increases.

An important observation is that with a larger number of USs, the probability of finding redundant clauses between USs increases. This has a significant impact on redundancy detection and backlog management. As the data set grows, there are more opportunities for overlaps, repetitions or similar USs that could indicate redundancy.

### Threats to Validity

When assessing the redundancy of USs through both personal assessment (ground truth) and the automated tool, several potential threats to validity must be considered. This section outlines the main threats to validity and describes how they were mitigated during the study.

**Construct validity** It refers to the extent to which the assessment measures what it is intended to measure. The following risks were identified:

- Ambiguity of criteria: If the criteria for redundancy are unclear or open to interpretation, this can lead to inconsistent scores. To avoid this, we defined clear and detailed criteria for identifying redundancy in USs.
- Subjectivity in ground truth: As ground truth is based on personal judgement, subjectivity could lead to bias. To minimise this risk, we cross-checked out evaluations with another experienced evaluator.

**External validity** External validity refers to the generalisability of the study results to other contexts or population groups. Threats to external validity include:

- specificity of USs: If the USs used in the study are too specific or context-dependent, the results may not be transferable to other projects. To mitigate this, we included 19 backlog datasets with different USs and different project types in the analysis.
- Tool Limitation: The automated tool is designed for a specific format of USs, which limits its broader applicability. Our tool depends heavily on the specific US's format (e.g. "As a <user>, I want to ..., so that..."), which is essential for the application of the tool. Therefore, we tested the tool in isolated contexts limited to well-formed USs and analysed its performance in a number of scenarios.

Another limitation is that our tool is dependent on the specific type of annotation used for USs. In our case, these are annotations such as action, entity, their reference targets, triggers and contains. This means that the effectiveness of the tool depends on the accuracy and consistency of these annotations. If the annotations are incomplete or incorrect, the tool may not work as expected. In addition, the tool may not be compatible with other annotation schemes that do not use these specific labels.

**Internal Validity** Internal validity is concerned with whether the observed results are attributable to the factors analysed or are influenced by other variables. Potential threats to internal validity include:

- Confounding factors: External influences or unintended variables could influence the assessment of redundancy. In particular, USs annotated with Doccano are a very critical impact when evaluating full and partial redundancies between USs using tool. The more phrases are covered in the relationship(targets, contains), the better the score. Since our tool uses Doccano annotated USs as primary input without any changes, these discrepancies are unavoidable.
- Limitation of tool: The automated tool may not capture all aspects of redundancy, especially semantically. This leads us to the next step, the semantic analysis of USs.

## 4.6 Conclusion

In this study, we developed and applied a comprehensive approach that combines the Doccano tool, Henshin and the CDA tool to systematically identify and report redundancies in USs within software development projects with an evaluation.

By carefully analysing 19 different backlog datasets, our method not only separated USs into main and benefit parts for nuanced examination, but also facilitated the distinction between full and partial redundancies within these parts.

Our results reveal a crucial finding: the effectiveness of redundancy detection is significantly influenced by the quality of the USs as well as annotated USs. Well-formulated USs that do not contain unnecessary clauses (e.g. the repetition of "end product" in

all USs) and a concisely annotated backlog specially in relation properties also have a major influence on the effective redundancy analysis process.

If the main part is evaluated to be full redundant, then we have a US-pair that is functionally identical and we can merge the US-pair into one US. In the case of full redundancy in the benefit part, this means that the US-pairs belong to the same goal and objective, to which they should be categorised for better accessibility and understanding.

A notable trend emerged from our analysis: the benefit parts are more often fully redundant than the main parts of USs. This indicates that multiple USs often strive for different functions that contribute to a common system aspect or goal.

Recognising such redundancies not only helps to consolidate functionally identical US-pairs into single, more compact USs, but also to group US-pairs together, improving accessibility and understanding of project backlogs.

In summary, our study confirms the central role of a syntactic analysis approach in detecting and managing redundancies in project backlogs, thereby contributing to the rationalisation of software development processes.

While the quality of annotated USs plays a critical role in the success of this approach, the insights gained from this research provide valuable guidance for both current practices and future research in software project management.

However, our investigation has also shown that we can only consider USs with syntactic redundancy. If they are indeed US-pairs with the same functionality but using different words and clauses to achieve the same goal, we cannot detect this with this approach.

This finding shows that the distinction between actual redundancy and mere superficial similarity can be further refined, which leads us to analyse the USs semantically.

In the next section, we therefore present a method for analysing conflicts and dependencies between USs in semantic way.

## 5 Analysing Conflict

In software development, especially in agile methods, conflict analysis is an important task to ensure the coherence and functionality of the system to be developed. A conflict is defined as a inconsistency that arises when two or more requirements, often encapsulated as USs, contradict each other. This section will introduce and define conflict analysis, focusing on the concept of *content inconsistency* between USs.

The main objective of this analysis is to rationalise the software development workflow by semantically identifying conflicts between the USs within the backlog of a project.

A conflict of requirements arises when two or more USs show contradictions or inconsistencies. This can manifest itself in various forms, e.g. in the manipulation of the same resource by several USs at the same time, in overlapping functions or in conflicting conditions.

**Example 5.1.** *Considering following USs:*

*user\_story\_13: "#G03# As a Staff member, I want to Apply a Hold, so that I can prevent progression through the workflow or other actions in the system until the issue is resolved."*

*user\_story\_14: "#G03# As a Staff member, I want to Remove a Hold, so that I can allow progression through the workflow or other actions in the system now that the issue has been resolved."*

*In this example, user\_story\_14 deletes a resource that is used by user\_story\_13. This means that user\_story\_13 cannot be applied at all if user\_story\_14 is executed first, which leads to a conflict between these USs.*

In section 5.1, we present the requirements and functional needs that serve as input for the design phase in order to fulfil the requirements. In section 5.2 we explain the design decisions of the workflow shown in figure 40 and explain how the architecture is structured.

## 5.1 Requirements

In order to accomplish the analysis of conflicts in USs we try to address following functional requirements:

- As a user, I want to perform semantic analysis on user stories within a specified project backlog, so that I can identify and address conflicts effectively.
- As a user, I want a report on the US-pairs that are conflicting in the main parts so I can change them if needed.
- As a user, I want to apply a filter to the conflict report to only show US-pairs that have the same resource (as entity) with different verbs (as action), so that the verbs are semantically contradictory (e.g. one US deletes a resource that another US is using, or deleting or one US creates a resource that another US prohibits).
- As a user, I would like to have a conflict report that shows founded US texts in US-pairs and adds a hash symbol (#) at the beginning and end of conflicting verbs and a noun (as a resource) as a marker, so that I can better recognise the verbs and noun that conflict in US-pairs.
- As a user, I want to see how many conflict US-pairs have been created in the main parts of the USs within a backlog, so that I can summarise conflict US-pairs founded on this basis for further statistical purposes.
- As a user, I want a table at the top of the conflict report that lists the US-pairs in conflict, so that I can quickly see all the US-pairs that have been founded.

To judge the operation of a system, we define following non-functional requirements:



- **Testability:** The system should support automated test procedures to ensure that semantic analysis and conflict detection work correctly. It should include comprehensive test cases covering different scenarios, including edge cases, to verify the accuracy and reliability of conflict detection.
- **Documentation:** The system should include detailed documentation covering all aspects of functionality and setup. User manuals, API documentation and troubleshooting guides should be provided.
- **Performance:** The system should perform the conflict analysis within a reasonable time frame, even with large project backlogs. It should be optimised so that it can process large volumes of data without any significant loss of performance.
- **Scalability:** The system should be scalable to handle an increasing the number of USs and larger project backlogs.

## 5.2 Design

This section describes the operational flow and architectural considerations that underpin the framework.

### Design Overview

To address the conflict detection requirements specified in Section 5.1, our system used the backlogs labelled with Doccano tool<sup>26</sup> generated by Mosser et al. as the primary input[4].

In order to apply conflict analysis, a preparation phase is required. In this phase, each verb should be classified using the VerbNet<sup>27</sup> classification. Finally, each verb class annotated into four categories, namely *Create*, *Delete*, *Preserve*, or *Forbid* (from now on) called *action-rule*. To validate the action rules, a personal judgement is made for each verb in the context of the backlog by three evaluators as a final check, so that each person verifies the action rules for each verb and also comments his/her own interpretation. We then collect all personal judgements and combine all inconsistencies for each verb. Subsequently, we add action rules into the backlogs labelled with Doccano tool.

After preparation, annotated USs are used to analyse conflicts between USs in the backlog using the *ReportMaker* class.

Finally, a conflict assessment phase is initiated for further statistical purposes.

Figure 40 illustrates how each step in this sequence is interconnected, with the output of one step feeding directly into the next. This diagram effectively demonstrates the toolchain and process workflow, highlighting how each tool transforms artefacts and contributes to the overall objective of conflict detection.

<sup>26</sup><https://github.com/ace-design/nlp-stories>

<sup>27</sup><https://verbs.colorado.edu/verbnet>

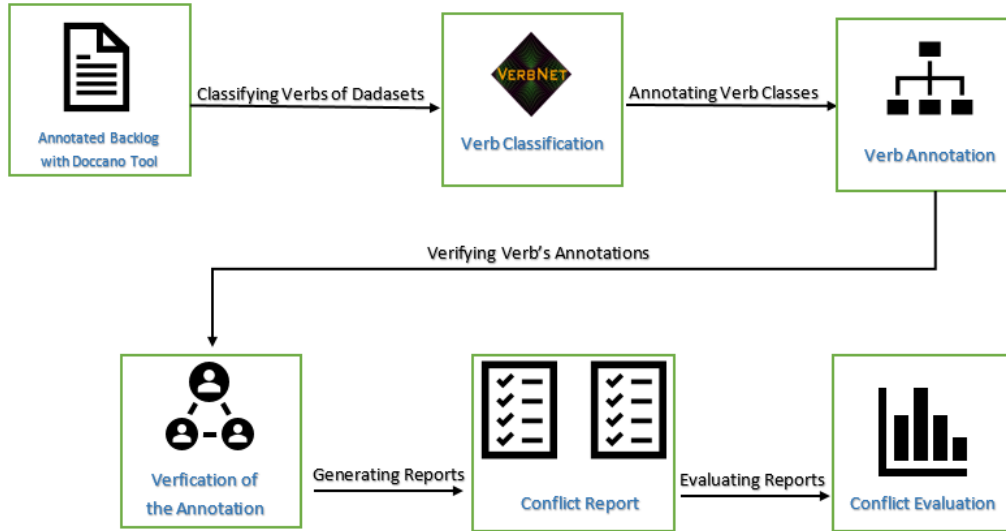


Figure 40: Step-by-step visualisation of the tool chain and its inputs and outputs

**Preparing the JSON-Format of the Primary Input** Since the annotated USs in the original JSON files did not separate entries such as Entity, Action, Text, Targets and Contains, it is not clear which element belongs to which part of the USs, which leads to ambiguity. Accordingly, we use a class called *JSONTransformer* that separates entries based on their occurrence in both the main and benefit parts of the USs. It also specifies an identifier to assign a unique identifier to each US, which is stored in a JSON object called "*US\_Nr*". These additions improve the system's ability to distinguish and process individual USs within the analytical pipeline.

**Extraction of text reports** Creating a text report aims to find conflicts between USs and highlight important information, such as identifying potentially conflicts US-pairs, the conflict reason, the resource (as noun) affected by actions (as verbs) causing the conflict, the texts of the main parts with the affected elements marked with # and a tabulation of the potentially conflicting pairs.

**Evaluating the reports** Once we have created the reports, we can now assess the correctness of the US-pairs reported as conflicts, i.e. whether the reported US-pairs really cause a conflict.

## Software Architecture

In this section, we present the basic structures of our workflow and the discipline of creating such structures. Each structure comprises software elements, relations among them, and properties of both.

- Annotated USs with Doccano Tool<sup>28</sup>: Mosser et al. used publicly available requirements from Dalpiaz et al.[11] consisting of 19 product backlogs and 1,458 USs. The dataset is a raw archive of 19 text files, each containing one US per line. As there were no public expert-based annotations, Mosser et al. manually annotated the dataset using the Doccano tool for *Named Entity Recognition*. Labels included persona, action, entity, benefit part and relations such as triggers, targets, and contains based on their domain meta-model. As artefact we receive a graph-based model with JSON format, which represents the refined and annotated dataset for the recognition of *entities*, *actions*, *personas* and *benefits* of USs [30].
- Eclipse as IDE<sup>29</sup>: Eclipse is an integrated development environment (IDE) used in computer programming. It contains a base work workspace and an extensible plug-in system for customizing the environment. We chose this IDE because it offers the Henshin tool specifically for model-based development.
- VerbNet as Verb Lexicon Resource<sup>30</sup>: VN is the largest on-line network of English verbs that links their syntactic and semantic patterns. It is a hierarchical, domain-independent, broad-coverage verb lexicon with mappings to other lexical resource, such as WordNet<sup>31</sup>, PropBank<sup>32</sup>, and FrameNet<sup>33</sup>. VerbNet is organized into verb classes extending Levin (1993) classes through refinement and addition of subclasses to achieve syntactic and semantic coherence among members of a class. Each verb class in VN is completely described by thematic roles, selectional preferences of the arguments, and frames consisting of a syntactic description and a semantic representation with subevent structure patterned on the Dynamic Event Model of Pustejovsky and Moszkowicz and Pustejovsky[19].
- JSONTransformer Class: This class is part of the *org.henshin.backlogconflict.code.rule* package and is a key component of the software architecture designed for transforming primary input datasets in JSON format. It separates entries based on their occurrence in both the main and benefit parts of the USs. It also assigns a unique identifier to each US to facilitate tracking and management.

This transformation simplifies subsequent tasks for editing, analysing and conflict resolution by providing a clear structure for the USs and their components. The separation of main and benefit parts and the assignment of unique identifiers improves the manageability and traceability of USs within the system.

- Action Rule Reference Database: This component is essential for identifying conflicts between USs, especially conflicts arising from actions over common entities

---

<sup>28</sup><https://github.com/doccano/doccano>

<sup>29</sup><https://eclipseide.org/>

<sup>30</sup><https://verbs.colorado.edu/verbnet/>

<sup>31</sup><https://wordnet.princeton.edu/>

<sup>32</sup><https://propank.github.io/>

<sup>33</sup><http://framenet.icsi.berkeley.edu/>

( as resources). To achieve this, we categorise actions into four different groups: *Preserve, Delete, Create and Prohibit*.

The main purpose of the action rule reference database is to facilitate the translation of actions (in the form of verbs) found in USs into corresponding action-rules. This process involves several important steps:

1. Collection of Actions: we collect all actions (represented as verbs) from existing datasets and compile them into a CSV file. This file serves as comprehensive reference database.
  2. Contextual Translation: each verb in the CSV file is translated into the corresponding action-rules related to its VerbNet class.
- ReportMaker Class: This class developed within the *org.henshin.backlogconflict.code.report* packages, serves
  - ReportExtractor Class: The class from the *org.henshin.backlog.code.report* package is used in our software architecture to extract and format reports from the CDA-generated *Minimal-Model.ECore* that contain all information about redundant US-pairs such as redundant elements with their name and type. It uses classes from the *org.eclipse.emf.ecore* package to handle EMF (Eclipse Modelling Framework) resources that support the management and manipulation of *Minimal-Model.ECore* data in a structured format.

In operation, the ReportExtractor class reads *minimal-model.ecore* files containing detailed information about redundant US-pairs. It then processes this data to generate reports in both text and JSON formats, aiding in the systematic analysis of potential redundancies within the USs. This is facilitated through methods that dynamically read and interpret the JSON data, extracting key information such as actions, entities, and their interactions.

- Evaluation Class: The class is part of the *org.henshin.backlog.code.evaluation* package, serves a critical function within our software architecture, focusing on the analysis and determination of redundancy between USs based on specified criteria. This class utilizes JSON processing to assess the overlap and redundancy between elements of USs, such as triggers, targets, and contains, which are vital for identifying potential redundancies in the USs.

Key functionalities of this class include reading and interpreting JSON data, where it extracts detailed elements related to USs and evaluates them against redundancy criteria defined in its methods. The class's method *evaluateRedundancyCriteria* is particularly central, as it processes the JSON objects representing USs to determine if they are fully or partially redundant based on the presence and matching of various JSON array elements like triggers, targets, and contains in the main and benefit parts of the USs.

Figure 41 shows the architectural composition, highlighting the integral components and their user interface and artefacts. Regarding conflict, some definitions are clarified:

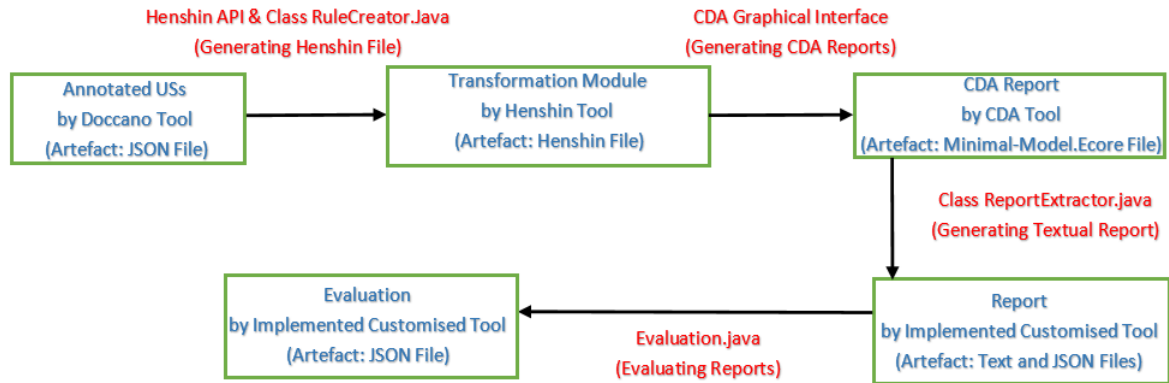


Figure 41: Design phases

**Definition 5.1 (Main and Benefit Parts in User Story).** *A user story (US) is divided into two distinct parts that collectively describe what the user wants, why they want it, and how it will benefit them. These are:*

- *The main part, which is essential as it clearly and concisely summarises the persona, the intended functionality and the resources required to perform the action. This part usually has follow the format: "As a [persona], I want [what]".*

*Here, the persona helps contextualise the requirement by linking it to a user type, which promotes understanding and empathy. The intended functionality describes the action that the persona wants to perform or the function they need, providing a clear statement of the requirement.*

*Specifying the resources required to perform the action helps with planning and resource allocation and ensures that the development team is aware of the tools, technologies and time required.*

- *The benefit part, which formulates the potential benefit for the end user and typically begins with the phrase "so that". This part of the US is used for justifying the need for a feature by explaining the value or improvement it brings to the user's experience. It connects the functionality directly to user satisfaction, efficiency, or productivity gains, making it easier for the development team to prioritize features based on their impact.*

*It is worth noting that sometimes the benefit part may not exist in the structure of USs. In such cases, the main part can stand alone.*

**Definition 5.2 (Conflict).** *Conflict refers to situations where two USs try to:*

- *delete a resource which another US are using*
- *delete a resource which another US also wants to delete*
- *create a resource which another US prohibits*

*Notation. Lowercase identifiers refer to single elements, and uppercase identifiers denote sets.*

*A user story  $us$  is a 2-tuple  $us = \langle m, b \rangle$  where:*

1. *A main  $m$  is define a 6-tuple:*

$$m = \langle p, A, E, Tr, Ta, Co \rangle$$

*where:*

- *$p$  is the persona.*
- *$A = \{a_1, a_2, \dots\}$  is a set of actions.*
- *$E = \{e_1, e_2, \dots\}$  is a set of entities.*
- *$Tr = \{(p_1, a_1), (p_2, a_2), \dots\}$  is a set of trigger references, each begin a pair of persona and action.*
- *$Ta = \{(a_1, e_1, R_1), (a_2, e_2, R_2), \dots\}$  is a set of target references, each begin a triple of action, entity, and action-rules  $R$ .*
- *$Co = \{(e_1, e_2, R_1), (e_*, e_*, R_2), \dots\}$  is a set of contain references, each begin a triple of entities and action-rules  $R$ .*
- *$R = \{\text{preserve, create, delete, forbid}\}$  are the rules applied to actions.*

2. *A benefit  $b$  is define as a 4-tuple:*

$$b = \langle A, E, Ta, Co \rangle$$

*where:*

- *$A = \{a_1, a_2, \dots\}$  is a set of actions.*
- *$E = \{e_1, e_2, \dots\}$  is a set of entities.*
- *$Ta = \{(a_1, e_1), (a_2, e_2), \dots\}$  is a set of target references, each begin a pair of action and entity.*
- *$Co = \{(e_1, e_2), (e_*, e_*), \dots\}$  is a set of contain references, each begin a pair of entities.*

To denote that a syntactic operator, we add the subscript “syn”; for instance,  $=_{syn}$  is syntactic equivalence which introduced by Lucassen et al. [26].

Consider two USs:

$$us_1 = \langle m_1, b_1 \rangle \text{ where } m_1 = \langle p_1, a_1, e_1, tr_1, ta_1, co_1 \rangle$$

$$us_2 = \langle m_2, b_2 \rangle \text{ where } m_2 = \langle p_2, a_2, e_2, tr_2, ta_2, co_2 \rangle$$

$us_1$  causes a conflict if:

The entity  $e_1$  is an exact redundant of entity  $e_2$ , formally:

$isRedundant(e_1, e_2) \leftrightarrow e_1 =_{syn} e_2$  and one of the following conditions holds:

1.  $ta_1 = (e_1, a_1, \text{"preserve"})$  and  $ta_2 = (e_2, a_2, \text{"delete"})$
2.  $ta_1 = (e_1, a_1, \text{"create"})$  and  $ta_2 = (e_2, a_2, \text{"forbid"})$
3.  $ta_1 = (e_1, a_1, \text{"delete"})$  and  $ta_2 = (e_2, a_2, \text{"delete"})$

To comprehensively assess conflicts, it is important to consider not only the textual content but also the functional relevance of each action over entities within the USs. By categorizing actions into four groups, conflict that may not be immediately apparent through a simple text comparison can be uncovered, thereby reducing time consumed in finding conflicts manually.

**Definition 5.3 (Full Redundancy).** A US-pair are fully redundant in their main parts if

- there are redundant target references  $Ta_2$  in  $m_2$  for all target references  $Ta_1$  in  $m_1$ , so that  $Ta_1$  and  $Ta_2$  are redundant, and vice versa, and
- there are redundant trigger references  $Tr_2$  in  $m_2$  for all trigger references  $Tr_1$  in  $m_1$ , so that  $Tr_1$  and  $Tr_2$  are redundant, and vice versa, and
- there are redundant contain references  $Co_2$  in  $m_2$  for all contain references  $Co_1$  in  $m_1$ , so that  $Co_1$  and  $Co_2$  are redundant, and vice versa.

A US-pair are fully redundant in their benefit parts if

- there are redundant target references  $Ta_2$  in  $b_2$  for all target references  $Ta_1$  in  $b_1$ , so that  $Ta_1$  and  $Ta_2$  are redundant, and vice versa, and
- there are redundant contain references  $Co_2$  in  $b_2$  for all contain references  $Co_1$  in  $b_1$ , so that  $Co_1$  and  $Co_2$  are redundant, and vice versa.

A US-pair was categorised as "full redundancy" in the main/benefit part if all occurring clauses in the main/benefit part consisting of triggers (for the main part only), targets and contains were syntactically identical.

This means that in each pair, the wording, order and structure of the clauses relating to the triggers and targets must be identical to fall into this category. The check also extends to the "contain" elements, if these are present, to ensure that these also match perfectly and without deviations.

Full redundancy in the main part means that the redundant stories do not provide additional information and can be consolidated or eliminated without compromising the completeness or operational integrity of the system specifications.

On the other hand, having this level of redundancy in the benefit part means that USs achieve the same goal; they can be categorised in the same group. This means that if the end results or benefits described by the USs are identical, regardless of the different actions/entities or triggers that lead to these results, the USs effectively serve the same purpose within the system.

**Example 5.2.** For example, the following US-pair is identified as "Full Redundancy" in the main part:

user\_story\_01: "#g14# as a #publisher#, i want to #publish# a #dataset#, so that i can view just the dataset with a few people."

user\_story\_02: "#g14# as a #publisher#, i want to #publish# a #dataset#, so that i can share the dataset publicly with everyone."

All existing clauses associated with the main elements in this scenario - in particular the trigger (where "Publisher" is the persona and "Publish" is the action) and the targets (where "Publish" is the action and "Dataset" is the entity) - are exactly the same in the main parts of the USs. This complete similarity shows that there is "full redundancy" in the main parts of these USs.

**Example 5.3.** Following US-pair is identified as "Full Redundancy" in "Benefit" part:

user\_story\_02: #g05# as a data publishing user, I want to be able to edit the model of data I have already imported, so that I can #fix# #bugs# or #make# #enhancements# in the #API# built for my #data#.

user\_story\_07: #g05# as a data publishing user, I want to be able to edit the data source of data I have already imported, so that i can #fix# #bugs# or #make# #enhancements# in the #API# built for my #data#.

As we can see, targets(["fix", "bugs"], ["make", "enhancements"]) and contains(["API", "enhancements"], ["data", "API"]) in the benefit part are identical between USs, therefore, we have "Full Redundancy" in the "Benefit" parts.

Last but not least, sometime there are words in the annotated USs that are not labelled as a reference (trigger, target or contain) by the Doccano tool at all, which



leads to a full redundancy being incorrectly recognised instead of a partial.

**Example 5.4.** *Considering following US-pair:*

*user\_story\_26: #g05# as an #api user#, i want to be able to #understand# if a #user# is an administrator, so that [...].*

*user\_story\_25: #g05# as an #api user#, i want to be able to #understand# if a #user# is a publisher, so that [...].*

*In this example, full redundancy is found due to the redundant targets and triggers in the main part, which is not entirely correct. This is because there are some phrases that do not appear as contain or target in any reference, such as: "administrator" (user\_story\_26) and "publisher" (user\_story\_25).*

**Definition 5.4 (Partial Redundancy).** *A US-pair are partially redundant in their main parts if there is a target reference  $ta_1$  in  $m_1$  and a target reference  $ta_2$  in  $m_2$ , so that  $ta_1$  and  $ta_2$  are redundant.*

*A US-pair are partially redundant in their benefit parts if there is a target reference  $ta_1$  in  $b_1$  and a target reference  $ta_2$  in  $b_2$ , so that  $ta_1$  and  $ta_2$  are redundant.*

*Note that in this definition, a US-pair that is fully redundant in the main part (or in the benefit part) is also partially redundant in the main part (or in the benefit part).*

*Partial redundancy in USs occurs when only certain clauses, such as targets, have significant overlap but are not completely identical. This means that while there are shared aspects such as targets between USs, other clauses such as triggers or contains may not overlap, indicating an incomplete match. Such a scenario indicates that there is substantial, but not fully, a match between the USs.*

**Example 5.5.** *Following US-pair is identified as "Partial Redundancy" in main part:*

*user\_story\_09: #g04# as a #user#, I want to be able to #view# a #map display# of the public recycling bins around my #area#.*

*user\_story\_10: #g04# as a #user#, I want to be able to #view# a #map display# of the special waste drop off sites around my #area#.*

*As we can see, there are some redundancy clauses such as Triggers (["user", "view"]), Targets (["view", "map display"]) and Contains(["map display", "area"]) between the USs. There are also clauses such as Contains (["public recycling bins"] vs. ["hazardous waste collection points"]) that are distinct elements justifying the maintaining of separate USs. We therefore assess this as "Partial redundancy" in the "Main part".*

**Example 5.6.** *Following US-pair is identified as "Partial Redundancy" in benefit part:*

*user\_story\_17: #g03# as a staff member, I want to manage approved proffers, so that I can #ensure# #compliance# with and satisfaction of the proffer in the future.*

*user\_story\_30: #g03# as a staff member, I want to manage affidavits, so that I can #ensure# #compliance# with the requirements prior to the hearing.*

As we can see, there is a redundancy clause as targets (["ensure", "compliance"]) between the USs in the benefit part, but there is also a clause as contains (["proffer", "satisfaction"] vs ["requirements", "hearing"]), which leads us to evaluate this as "Partial Redundancy" in the "Benefit" part.

## Design Phases

To provide a comprehensive overview of the design phases, this section explains each step of the process, from initial setup to final evaluation, using practical examples.

### Step 1: Data Preparation

As primary input, we receive a graph-based model generated by the Doccano tool, which represents the refined and annotated dataset for the recognition of *entities*, *actions*, *persons* and *benefits* of USs [4].

The datasets have the JSON format, the structure of which is very important in the Java classes *RuleCreator*, *ReportExtractor*, and *Evaluation*. Therefore, understanding the JSON format provided is needed for the further procedure.

Each JSON file for a backlog dataset contains a JSON-array in which each US entry is defined as a JSON-object. Listing 9 illustrates the format used for the US entry.

---

```
[
{
  "Text": "...",
  "Persona": [ "... " ],
  "Action": {
    "Primary Action": [ "...", ... ],
    "Secondary Action": ["..."], ... },
  "Entity": {
    "Primary Entity": [ "...", ... ],
    "Secondary Entity": [ "...", ...] },
  "Benefit": "...",
  "Triggers": [ [ "...", "..." ] ],
  "Targets": [ [ "...", "..." ], ... ],
  "Contains": [ [ "...", "..." ], ... ]
},
...
]
```

---

Listing 9: The JSON format of each US entry in JSON file

---

Mosser et al. have linked each *Persona* to each *Primary Action* as *Trigger* relationships, each *Primary Actions* to each *Primary Entity* as *Target* relationships and each *Primary/Secondary Entity* to each *Primary/Secondary Entity* implying a *Contains* relationship[4].

To interact with the entries in JSON file, we need to distinguish between the entries that are defined as JSON-objects, such as: Text, Action, Entity, Benefit and the entries that are defined as a JSON-array, such as: Persona, Primary/Secondary Action, Primary/Secondary Entity, Triggers, Targets, Contains.

## Identifying USs in JSON-File

Annotated USs in each JSON file have no identifier. To distinguish USs, we use a Python script called *nummerise\_us.py*<sup>34</sup>, which receives JSON files as input and adds a JSON object named "US\_Nr" with an identifier as value (e.g. user\_story\_01) to each US and returns the JSON files as output. Listing 10 illustrates the added JSON object "US\_Nr" and its value in the JSON file.

---

```
[
{
  "Text": "...",
  "Persona": [ "... " ],
  "Action": {
    "Primary Action": [ "...", ... ],
    "Secondary Action": [ "...", ... ],
  "Entity": {
    "Primary Entity": [ "...", ... ],
    "Secondary Entity": [ "...", ... ] },
  "Benefit": "...",
  "Triggers": [ [ "...", "..." ] ],
  "Targets": [ [ "...", "..." ], ... ],
  "Contains": [ [ "...", "..." ], ... ]
},
  "US_Nr" : "user_story_01"
,
...
]
```

---

Listing 10: The JSON format with the additional JSON object "US\_Nr" and its value

---

## Step 2: Creation of Rules

Step 2 of the design involves a central process in which the US data structured in JSON files is transformed into transformation rules using the Henshin API. This involves the creation of an Ecore meta-model that represents the structure of the data we are working with, followed by the generation of Henshin transformation rules using RuleCreator class.

---

<sup>34</sup>[https://github.com/amirrabieyannejad/Redundancy\\_Analysis/tree/main/Script/numberise\\_us](https://github.com/amirrabieyannejad/Redundancy_Analysis/tree/main/Script/numberise_us)

## Creating Ecore Meta-Model

To be able to create rules in Henshin, an Ecore (meta)-model should be available. Ecore is the core (meta)-model at the heart of the EMF (Eclipse Modelling Framework). It enables the formulation of other models by utilising its constructs.

Accordingly, we create an Ecore meta-model as shown in Figure 42, which is inspired by the meta-model shown in Figure 6 and corresponds to the JSON-objects in the JSON-file as follows:

- *Persona* as a class in the meta-model corresponds to the JSON-object “Persona” in the JSON-file.
- *Entity* as an abstract class, from which *Primary/Secondary Entity* inherits as a class in the meta-model, corresponds to the JSON-object “Entity”, which contains two JSON-arrays, namely “Secondary/Primary Entity” in the JSON-file.
- *Action* as an abstract class and *Primary/Secondary Action* as an inherited class in the meta-model correspond to the JSON-object “Action”, which contains two JSON-arrays, namely “Secondary/Primary Action” in the JSON-file.
- *Benefit* as a class in the meta-model, which also has an attribute called “text” that corresponds to the JSON-object “Benefit” in the JSON-file.
- *Story* as a class in the meta-model that contains text from US, which also has an attribute called “text” that corresponds to the JSON-object “Text” in the JSON-file.
- Abstract class *NamedElement* has attribute *name*, which *Primary/Secondary Action/Entity* inherit from it, which corresponds to the value of *Primary/Secondary Action/Entity* in JSON-file.
- *Edge* with the name *triggers* between *Persona* and *Primary Action* in the meta-model, which corresponds to the JSON-array “Triggers”, where each JSON-array in it contains a pair, the first element corresponding to the *Persona* and the second to the *Primary Action*.
- *Edge* named *targets* between *Primary/Secondary Action* and *Primary/Secondary Entity* in the meta-model, which corresponds to the JSON-array “Targets”, where each JSON-array has a pair, the first element corresponding to “Primary/Secondary Action” and the second element corresponding to “Primary/Secondary Entity”.
- *Edge* named *contains* between *Primary/Secondary Entity* and itself in the meta-model, which corresponds to the JSON-array “Contains”, where each JSON-array in it has a pair where the first element corresponds to “Primary/Secondary Entity” and the second element corresponds to “Primary/Secondary Entity”.

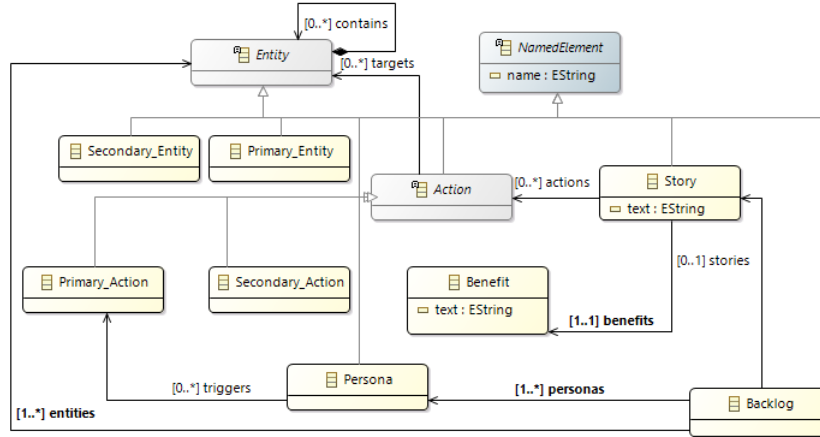


Figure 42: Ecore meta-model inspired by Mosser et al. [30]

## Creating Rules

With the identified USs in the the JSON-file, we generate rules with the Henshin package *org.eclipse.emf.henshin.model.compact*, which is responsible for the creation of *transformation rules* and their *classes*, *attributes*, *edges* and annotates them with *<Delete>*, *<Create>* or *<Preserve>*, which are vital for the CDA tool to recognise the redundant pairs.

To generating rules we create a package named *org.henshin.backlog.code.rule* and specially the class *RuleCreator* which used following classes<sup>35</sup>:

- *org.eclipse.emf.henshin.model.compact.CModule*: CModule class can import elements from an Ecore file to use them in the transformation process responsible for linking the Ecore meta-model to the Henshin-file to be created.
- *org.eclipse.emf.henshin.model.compact.CRule*: Once we have a CModule, we can specify transformation rules with the CRule class and create them.
- *org.eclipse.emf.henshin.model.compact.CNode*: Now that we have a transformation rule, we want to fill this rule with nodes, edges and attributes. To create a node within a transformation rule, we need the CRule class. To create an edge we need to reference two nodes together. The default action when specifying a node, edge or an attributes is the *<preserve>* action. We can also specify a different action when we create a node or an edge, for example *<delete>* or *<create>*.
- *org.henshin.backlog.code.rule.RuleCreator*: We implement *RuleCreator* class that creates a rule with annotated nodes, edges and attributes based on a JSON-file as input and a Henshin-file containing all rules as output, where each rule and its members(nodes, attributes, edges) correspond to the individual US and their JSON-objects/arrays in the JSON-file.

<sup>35</sup>[https://wiki.eclipse.org/Henshin/Compact\\_API](https://wiki.eclipse.org/Henshin/Compact_API)

The most important design decision of this class is the way nodes, attributes and edges are annotated in order to be able to apply conflict and dependency analysis (CDA) for rules stored as a Henshin file.

We decided to annotate the “name” attribute of all Primary/Secondary Actions/Entities and their associated edges including “targets”, “triggers” and “contains” as `<delete>action`.

The main goal is to increase the probability of identifying US-pairs characterised by matching names of *action* nodes and *entity* nodes in conjunction with an edge called *targets*. This congruence serves as a basic criterion for identifying potentially redundant US-pairs and simplifies the process of redundancy detection in the context of US analysis.

**Example 5.7.** Listing 11 shows the JSON format in relation to *user\_story\_12* and Figure 43 shows the application of the *RuleCreator* class in this US, which is a transformation rule where the targets and the associated contains relationships are annotated as a `<Delete>action` and the rest of the nodes and edges are annotated as a `<Preserve>action`.

Text of US is: *user\_story\_12*: “#G03# As a Staff member, I want to Assign an Application for Detailed Review, so that I can review the for compliance and subsequently approved or denied.”

```
{
  "Text": "#G03# As a Staff member, I want to Assign an Application
for Detailed Review, so that I can review the for compliance and
subsequently approved or denied.",
  "Persona": ["Staff member"],
  "Action": {"Primary Action": ["Assign"],
  "Secondary Action": ["subsequently approved", "denied", "review"]},
  "Entity": {"Primary Entity": ["Application"],
  "Secondary Entity": ["compliance", "Detailed Review"]},
  "Benefit": "I can review the for compliance and subsequently
approved or denied",
  "Triggers": [{"Staff member", "Assign"}],
  "Targets": [{"Assign", "Application"}, {"review", "compliance"},
  {"subsequently approved", "compliance"}, {"denied", "compliance"}],
  "Contains": [{"Application", "Detailed Review"}],
  "US_Nr": "user_story_12"
},
```

Listing 11: JSON entities Related to *user\_story\_12*

As we can see, the “targets” edges and their direct relationships (“triggers” and “contain”, if any) are also annotated as `<delete>`, which is very important to find redundant elements with the CDA tool.

**Example 5.8.** Listing 12 shows the JSON entities related to *user\_story\_39* and Figure 44 shows transformation rule generated by *RuleCreator* class.

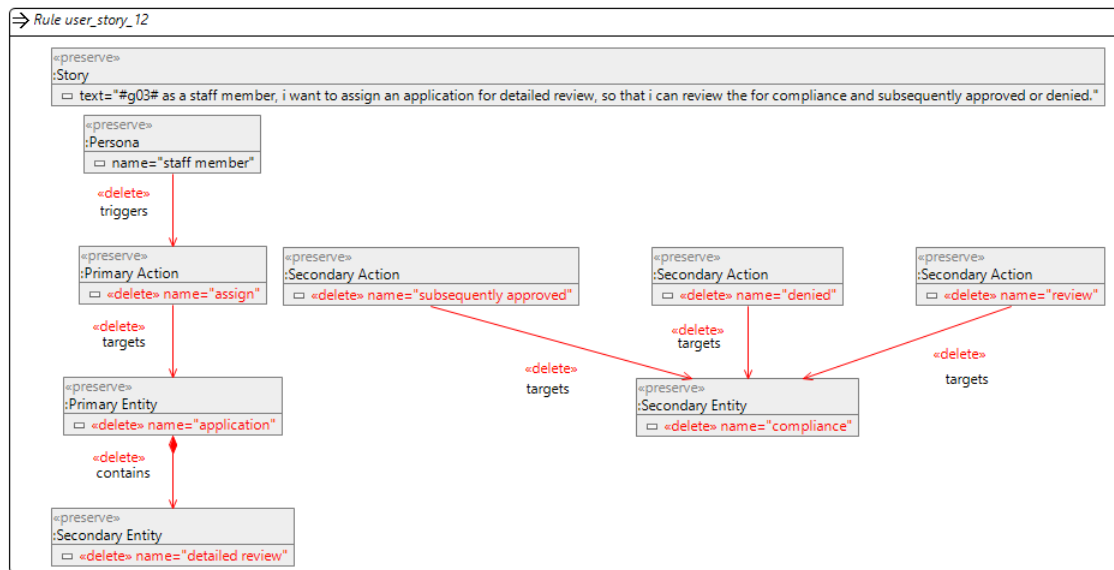


Figure 43: Generated transformation rule related to user\_story\_12 using RuleCreator class

Text of US is: user\_story\_39: "#G03# As a Plan Review Staff member, I want to Review Plans, so that I can review them for compliance and either approve, or fail or deny the plans and record any conditions, clearances, or corrections needed from the Applicant."

```

{
  "Text": "#G03# As a Plan Review Staff member, I want to Review Plans, so that I can review them for compliance and either approve, or fail or deny the plans and record any conditions, clearances, or corrections needed from the Applicant.",
  "Persona": ["Plan Review Staff member"],
  "Action": {"Primary Action": ["Review"],
  "Secondary Action": ["deny", "review", "approve", "fail", "record"]},
  "Entity": {"Primary Entity": ["Plans"],
  "Secondary Entity": ["compliance", "plans", "clearances", "Applicant", "corrections", "any conditions"]},
  "Benefit": "so that I can review them for compliance and either approve, or fail or deny the plans and record any conditions, clearances, or corrections needed from the Applicant",
  "Triggers": [{"Plan Review Staff member", "Review"]},
  "Targets": [{"Review", "Plans"}, {"review", "compliance"}, {"approve", "plans"}, {"fail", "plans"}, {"deny", "plans"}, {"record", "clearances"}, {"record", "corrections"}, {"record", "any conditions"}],
  "Contains": [{"Applicant", "plans"}, {"plans", "clearances"}, {"plans", "corrections"}, {"plans", "any conditions"}],
  "US_Nr": "user_story_39"
},

```

Listing 12: JSON entities Related to user\_story\_39

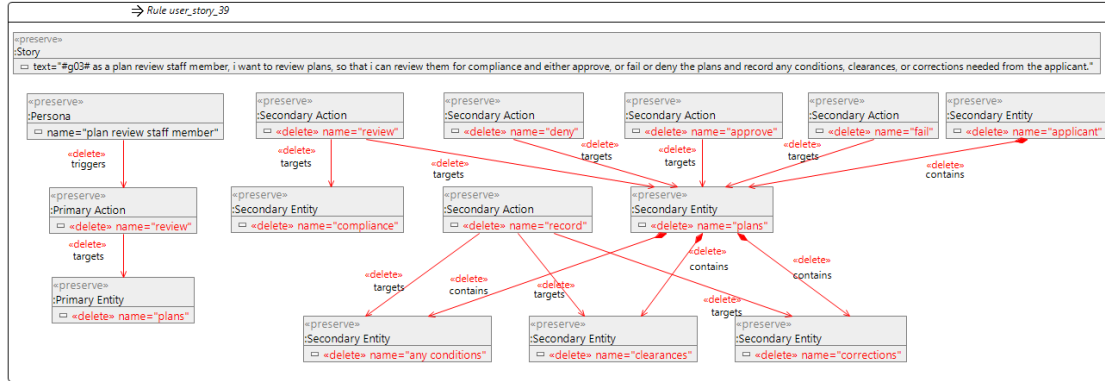


Figure 44: Generated transformation rule related to user\_story\_39 using RuleCreator class

Attribute "Plan", as we can see, it appears both in the main part as a primary entity and in the benefit part as a secondary entity, forming the various relationships as targets and contains.

**Example 5.9.** Listing 13 shows the JSON entities related to user\_story\_51 and Figure 45 shows transformation rule generated by RuleCreator class.

Text of US is: user\_story\_51: "#G03# As an Enforcement Staff member, I want to Issue a Notice of Violation, so that I can provide formal communication to the responsible party."

```
{
  "Text": "#G03# As an Enforcement Staff member, I want to Issue a Notice of Violation, so that I can provide formal communication to the responsible party.",
  "Persona": ["Enforcement Staff member"],
  "Action": {"Primary Action": ["Issue"],
    "Secondary Action": ["provide"]},
  "Entity": {"Primary Entity": ["Notice of Violation"], "Secondary Entity": ["formal communication", "responsible party"]},
  "Benefit": "I can provide formal communication to the responsible party",
  "Triggers": [["Enforcement Staff member", "Issue"]], "Targets": [
    ["Issue", "Notice of Violation"], ["provide", "formal communication"]],
  "Contains": [],
  "US_Nr": "user_story_51"
}
```

Listing 13: JSON entities Related to user\_story\_51



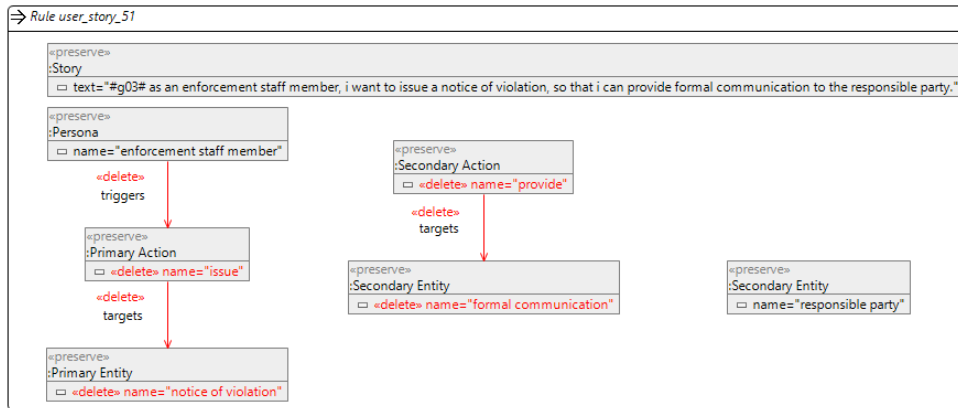


Figure 45: Generated transformation rule related to user\_story\_51 using RuleCreator class

*Last but not least, we have determined that the secondary entity "responsible party" has neither a target nor a contains relationship. Therefore, it is not annotated as <delete>, but as <preserve>. This is due to the fact that some phrases have been identified as entities in the Doccano tool, but their relationship is not annotated at all, which is problematic for analysing redundancy.*

### Step 3: Conflict and Dependency Analysis

After the rules and the corresponding henshin file have been created by the RuleCreator class, we are now able to pass them to the conflict and dependency analysis (CDA) to find potential redundancy pairs.

Since the analysis of conflicts and dependencies related to the *attribute* is not yet considered in the CDA API <sup>36</sup>, we decided to use the user interface (UI) of the CDA extension of Henshin, which supports analysis of conflict and dependencies of rules through the interactive use of CDA.

To apply CDA to Henshin files, we just need to right-click on the Henshin file and select *Henshin -> conflict and Dependency Analysis* from the context menu as shown in Figure 46. A user interface then appears, prompting to select the rule sets to be analysed




Figure 46: Applying CDA to the selected Henshin file

and the type of analysis. We then select as "*First*" and "*Second Rules*", all rules related to USs. Additionally, as the type of analysis we select "*conflicts*" as illustrated in Figure 47. On the next page of the CDA UI shown in Figure 48, we specify the depth of analysis

<sup>36</sup>[https://wiki.eclipse.org/Henshin/conflict\\_and\\_Dependency\\_Analysis](https://wiki.eclipse.org/Henshin/conflict_and_Dependency_Analysis)

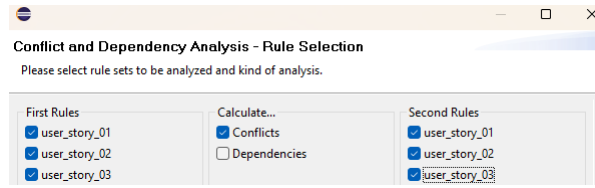


Figure 47: CDA user interface: Selection of rules and type of analysis

that we use with “*Fine granularity*” when selecting “*Create a complete result table*” and “*Create an abstract result table*”.

Fine granularity provides a detailed examination of each conflicting rule by listing all conflict reasons. Unlike coarse granularity, which focuses only on minimal conflict reasons, fine granularity includes both minimal and more general conflict reasons. The binary granularity, where simple conflicting rule pairs are listed, may be too simple for complex systems where understanding the nature of the conflict is essential for the solution. We choose “Fine granularity” as the depth of analysis due to the fact that it shows all conflict reasons for each conflicting rule pair. This allows for a deeper understanding of how different model fragments contribute to conflicts.

A conflict reason is a model fragment whose presence leads to a conflict. General conflict reasons result from different combinations of minimal conflict reasons[36]. During

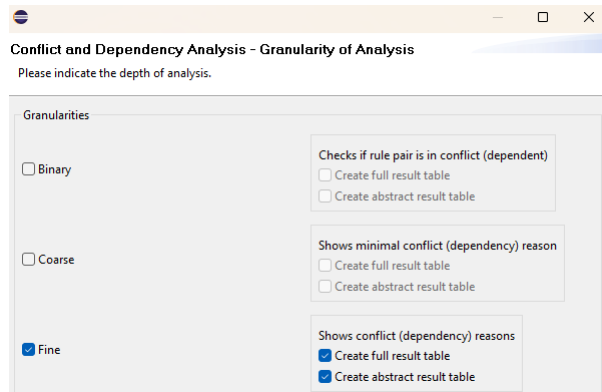


Figure 48: CDA user interface: Selection of report granularity

the execution of the CDA analysis, the rule pairs is analysed and a conflict analysis is performed. Once the calculation is complete, the results are listed in the “CDA” - > “Result window”, as shown in Figure 49. The top entry shows the granularity, which in our case is “Fine”. These entries contain the rule pairs that conflict with each other. Each rule pair contains a number of conflict reasons. Figure 50 shows how the data is saved in the project tree view. The results directory is created in the directory containing the Henshin that was used for the analyses. The new folder name is the date and time at which the analysis was performed. In contrast to the “CDA/Results” view, this folder contains all conflict reasons and atoms together in a rule pair directory. For each conflict




Figure 49: CDA report with fine granularity




Figure 50: Saving CDA results data in the project structure view

reason, there is a “*minimal-model.ecore*” file, that contains packages in which various conflict elements such as “attributes” and “references” (edges) are mapped together and displayed in different packages.

Figure 51 shows the representation of the conflicting attributes and references. An attribute has the property of changing the value and is represented by an arrow “->”. The attribute from the first rule is separated from the second rule by an underscore, just as with the nodes.

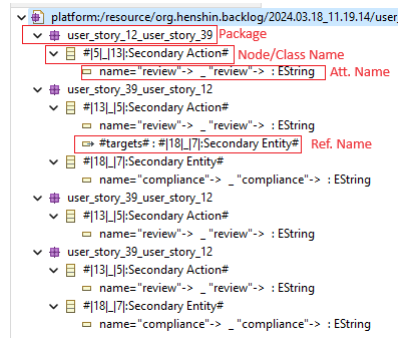


Figure 51: Representation of redundant attributes and references in *minimal-model.ecore* file

**Example 5.10.** To illustrate this step, we also pass the transformation rules created in step 2, which reflect three USs (*user\_story\_12/39/51*), to the CDA tool and selecting “conflicts” as conflict type to calculate with “fine granularity” as the depth of analysis.

Once the calculation is complete, the results are listed in the "CDA" -> "Results Window" as shown in Figure 52. Figure 53 shows how the data is saved in the project's tree view, which contains all conflict reasons and atoms together in a rule pair directory. As we can see, the CDA tool has only found redundancy between *user\_story\_12*




Figure 52: CDA report in relation to three transformation rules with "conflicts" as the type to be calculated and "fine granularity" as the depth of the analysis




Figure 53: Saving CDA results data in the project's tree view

and *user\_story\_39*. This is because there are no redundant clauses between two USs (*user\_story\_12* and *user\_story\_39*) and *user\_story\_51*.

Regarding the redundant elements specifically, we can refer to the created file "minimal-model.ecore", which is located in the tree view of the project under each conflict reason. Figure 53 show the minimal-model.ecore file related to *user\_story\_12* and *user\_story\_39*.

The file *Minimal-model.ecore*, which refers to *user\_story\_12* and *user\_story\_39*, is divided into packages, with each package containing different matches of redundant elements. If there is a redundancy between two elements, this is explicitly indicated by a hash symbol (#). Figure 54 illustrates the redundant elements found in each package.

For example, the attribute "name" with the value "review" in "Secondary Action" and the attribute "targets" with the value "compliance" in "Secondary Entity" are labelled as redundant (both with a hash symbol). The reference to "targets" is also marked as redundant (with a hash symbol), which means that the reference (targets) from "Secondary Action" to "Secondary Entity" is also redundant between USs, which is a very important criterion for finding redundancy correctly.

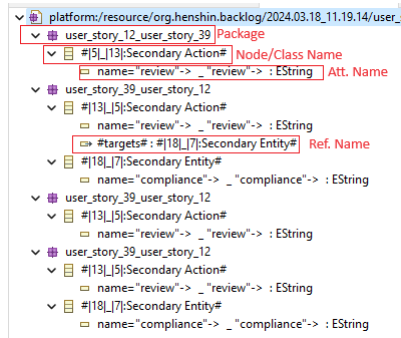


Figure 54: Representation of the redundant elements in each package within *minimal-model.ecore* file

#### Step 4: Report Extraction

To create a lightweight report for the group or individual in question, we need to extract the key information from the CDA report, e.g. redundancy US-pair, redundancy clauses, count of redundancy clauses in each part of the US (main or benefit part), and create a report as a text file with the following information:

- A table of potential redundant pairs with the number of total redundancy clauses.
- Founded potential redundant US-pairs.
- Redundancy words and clauses of founded US-pairs. Clauses consisting of two words that have one of the relationships triggers, targets or contains.
- Text of US-pairs whose redundancy words are marked with a hash symbol (#).
- Parts of the sentence in which words and clauses are found.

#### Structure of a US

The delineation and checking of redundancy clauses within USs requires a methodical approach, especially when distinguishing between the main and the benefit part of a US-pair. This distinction is crucial to ensure that redundancy identifications within one part are not mistakenly transferred to the other. Consequently, the analytical framework comprises three conditions, each of which specifies its own methodology for case processing:

- Presence of benefit in both USs of the redundancy-pair: if a benefit is identifiable in each US of the pair, a process of separation is used to split the main content from the benefit parts. After this separation, a targeted search for redundancy clauses

is carried out only within the main part, whereby identified redundancies are annotated with a hash symbol (#). This process is repeated for the benefit parts to ensure a thorough check and marking of redundancies within each individual part.

- Exclusive presence of a benefit in one US of the redundancy-pair: In scenarios where only one US of the pair contains a benefit part, the analysis is limited to the main part of both USs. The aim remains the identification and annotation of redundancy clauses within this part. The lone benefit part remains in its original state and is excluded from the redundancy check.
- Absence of benefit parts in both USs of the pair: If neither of the two USs of the redundancy-pair contains a benefit part, the focus shifts completely to the main parts. The investigation is designed to highlight redundancy clauses within these parts, whereby the benefit parts are not taken into account due to their non-existence.

This structured and segmented approach ensures precise and efficient identification of redundancy clauses within the USs, optimising the clarity and effectiveness of textual report.

**Example 5.11.** *After the CDA directory for user\_story\_12 and user\_story\_39 is created by CDA tool graphic interface (UI), we pass the location of directory into ReportExtractor class and in order to extracting the important information and save it into the textual report as well as JSON report. Listing 14 illustrates the example of the textual report. In this case, the report only contains one US-pair.*

```
* Table of potential redundancies between user stories and the number of their overlapping
elements
      us_12  us_39
us_12  0      1
us_39  1      0
```

-----[Potential Redundant User Stories found]-----  
{user\_story\_12\_AND\_user\_story\_39}

Redundant clauses within user stories are:

```
* Secondary Action: review
* Secondary Entity: compliance
* Targets: Link from "review" to "compliance" is found.
```

user\_story\_39: #g03# as a plan review staff member, i want to review plans, so that i can #review# them for #compliance# and either approve, or fail or deny the plans and record any conditions, clearances, or corrections needed from the applicant.

user\_story\_12: #g03# as a staff member, i want to assign an application for detailed review, so that i can #review# the for #compliance# and subsequently approved or denied.

The following sentence parts are candidates for possible redundancies between user stories:

user\_story\_12: so that i can #review# the for #compliance# and subsequently approved or denied.

user\_story\_39: so that i can #review# them for #compliance# and either approve, or fail or deny the plans and record any conditions, clearances, or corrections needed from the applicant.

Listing 14: Example of generated textual report for one US-pair

*As we can see, the text report consists of a 2 x 2 table whose first column and first row are US identifiers, and the numbers inside the table are the total number (benefit part + main part) of redundancy elements between two USs; secondly, the redundant clauses related to the redundant US-pair are listed; thirdly, the text of US whose redundant phrases are marked with a hash symbol; finally, the part of the clauses in which redundant elements occur is displayed.*

For further evaluation purposes and easy export of the report to another platform such as Excel, a JSON report is created that collects the information about redundant US-pairs separately in a JSON object with the following entries:

- Potential Redundant User Stories: which has stored the US-pair identifier(e.g. "user\_story\_12\_AND\_user\_story\_39").
- Status: consisting of "Main/Benefit Part Redundancy Clauses" and "Total Redundancy Clauses", which store the count of redundancy clauses in the main and benefit part as well as in the total part of the US.
- Entity: which can consist of a "Secondary/Primary Entity" and stores the founded redundant entities.
- Common Targets/Contains: which consists of the "Main Part" and "Benefit Part" entries and only stores the targets/contains relationships that are common between the USs in a particular part of the USs. For example, if there are common redundant targets in the main part of the USs, these are included in the "Main Part" entity of the "Common Targets".
- Text: consisting of two entries, namely "First UserStory" and "Second UserStory", in which the text of the US-pair whose hash symbol has already been applied in redundant phrases is stored.
- Project Number: stores the number of the Project(e.g. "G03").
- Part of Sentence: consists of the entries "First UserStory" and "Second UserStory", in which the part of the US sentences containing redundant clauses is stored.
- All Targets/Contains: which consists of the "Main Part" and "Benefit Part" entries and stores the whole targets/contains relationships that are occurred in the particular part of the USs.

**Example 5.12.** *Listing 15 illustrates the example of the JSON report regarding user\_story\_12 and user\_story\_39.*

```
[
  {
    "Potential Redundant User Stories": "user_story_12_AND_user_story_39",
    "Status": {"Main Part Redundancy Clauses": 0, "Total Redundancy Clauses": 1,
    "Benefit Part Redundancy Clause": 1,},
    "Entity": {"Secondary Entity": ["compliance"]},
    "Common Targets": {"Main Part": [], "Benefit Part": [["review", "compliance"]]},
    "Action": {"Secondary Action": ["review"]},
    "Common Contains": {"Main Part": [], "Benefit Part": [], "Targets": [["review",
    "compliance"]]},
    "Triggers": [],
    "Text": {"Second UserStory": "user_story_39: #g03# as a plan review staff member,
    i want to review plans, so that i can #review# them for #compliance# and either
    approve, or fail or deny the plans and record any conditions, clearances, or
    corrections needed from the applicant.",
    "First UserStory": "user_story_12: #g03# as a staff member, i want to assign
    an application for detailed review, so that i can #review# the for
    #compliance# and subsequently approved or denied."},
    "Project Number": "g03",
    "Part of Sentence": {"Second UserStory": [" so that i can #review# them for
    #compliance# and either approve, or fail or deny the plans and record any
    conditions, clearances, or corrections needed from the applicant."],
    "First UserStory": [" so that i can #review# the for #compliance# and
    subsequently approved or denied."]},
    "All Contains": {"user_story_39": {"Main Part": [], "Benefit Part": [{"applicant",
    "plans"}, {"plans", "clearances"}, {"plans", "corrections"}, {"plans", "any conditions"}
    ]},
    "user_story_12": {"Main Part": [{"application", "detailed review"}], "Benefit
    Part": []}},
    "All Targets": {"user_story_39": {"Main Part": [{"review", "plans"}], "Benefit Part"
    : [{"review", "plans"}, {"review", "compliance"}, {"approve", "plans"}, {"fail", "plans"}
    ], {"deny", "plans"}, {"record", "clearances"}, {"record", "corrections"}, {"record",
    "any conditions"}]},
    "user_story_12": {"Main Part": [{"assign", "application"}], "Benefit Part": [{"
    review", "compliance"}, {"subsequently approved", "compliance"}, {"denied",
    "compliance"}]}}
  ],
]
```

Listing 15: Example of generated JSON report for one US-pair

## Step 5: Report Evaluation

The Evaluation class, part of the *org.henshin.backlog.code.evaluation* package, was developed to determine the level of redundancy in USs based on JSON reports. This class provides methods to evaluate whether two USs are either fully or partially redundant, analysing different application components of these USs.



The evaluation process involves a complex logic to determine whether USs are redundant. This includes:

- Checking whether the arrays are empty or contain similar elements.
- Comparing the individual elements in the arrays for both USs to determine if they fully match (full redundancy) or if they have some common elements (partial redundancy).

**Example 5.13.** *For the two US-pairs of dataset G03, we apply the evaluation class to determine whether there is redundancy in the main or benefit part, and if so, what type of redundancy is recognised(full or partially).*

*As shown in Listing 16, four entries are added to the JSON report, namely "Main Partially Redundant", "Benefit Part Fully Redundant", "Main Part Fully Redundant", "Benefit Partially Redundant" as "Status" which their value is whether true or false.*

```
"Status":
{
  "Main Part Redundancy Clauses": 0,
  "Main Part Partially Redundant": false,
  "Total Redundancy Clauses": 1,
  "Benefit Part Fully Redundant": false,
  "Benefit Part Redundancy Clause": 1,
  "Main Part Fully Redundant": false,
  "Benefit Part Partially Redundant": true
},
```

Listing 16: Example of generated entries in JSON report regarding evaluation of level of redundancy in main or benefit part

*In the case of user\_story\_12 and user\_story\_39, the entry "Benefit Partially Redundant" was marked as true, which means that US-pair in benefit parts are partially redundant.*

The class performs these checks by iterating through the JSON arrays of Triggers, Targets and Contains and comparing each element with those in the common sections to determine redundancy.

### 5.3 Implementation

In this section, we explain the objective and scope of the implementation, the functionality and the programming languages used.

The entire implementation is available in the GitHub repository <sup>37</sup>.

<sup>37</sup>[https://github.com/amirrabieyannejad/Redundancy\\_Analysis/tree/main](https://github.com/amirrabieyannejad/Redundancy_Analysis/tree/main)

## Methodology

This section explains and introduces tools that are required during the development process.

Following approach and tools are necessary in order to develop our workflow:

- Java as programming language<sup>38</sup>: Java is a widely used object-oriented programming language and software platform that is used to implement the Henshin and EMF APIs, which are critical to our approach to utilising them. Therefore, we use Java as our programming language.
- GitHub as version control<sup>39</sup>: GitHub is a developer platform that allows developers to create, store, manage and share their code. It uses Git software, providing the distributed version control of Git plus access control, bug tracking, software feature requests, task management, continuous integration, and wikis for every project.

## Implementation Phases

This section contains a step-by-step guide to implementation, starting with the set-up and ending with the final evaluation.

### Creation of Rules

In this section, we explain the methods we used to convert the US data structured in JSON files into transformation rules using the Henshin API. The process starts with the creation of an Ecore meta model, as explained in Section 5.2, which reflects the structure of the data. The henshin transformation rules are then generated using the RuleCreator class and its methods.

### Methods of the RuleCreator Class

In this section, the methods of the RuleCreator class is described as follows:

- `assingCmodule`: This method assign a CModule to a Ecore meta-model. It creates a new CModule object with the provided Henshin-file name, adds imports from the Ecore file, and returns the module.
- `processJsonFile`: It takes parsed JSON array as input and processes their attributes, such as persona, actions, entities, text and their edges, such as targets, triggers. Corresponding elements are created as output in a the Henshin transformation module (CModule).

---

<sup>38</sup><https://www.java.com/de/>

<sup>39</sup><https://github.com/>

- **processRule:** It takes the “US\_Nr” JSON-object as input and creates a new CRule with the name of unique US identifier in the CModule.
- **processPersona:** It receives as input the persona extracted from the JSON data and the associated CRule to create a new CNode representing the persona within the provided CRule and adds the attribute “name” with persona as value. Finally, the created CNode representing the persona is returned.
- **processText:** It receives as input US text extracted from JSON data and the associated CRule to create a new CNode representing the text within the provided CRule and adds the attribute “text” with US text as value. Finally, the created CNode representing the US text is returned.
- **processActions:** The processActions method is responsible for creating CNode objects that represent actions within the CModule. As parameters, it receives the JSON-object of the actions, the CNode-object representing the persona associated with the actions and the unique identifier of the US. Since the edge triggers only refer to the persona and the primary action, a new CNode is created for each primary action that represents the primary action within the provided CRule, an attribute “name” is added and an edge is created from the persona node to the primary action with the label “triggers”. For each secondary action, a new CNode is created to represent the action within the provided CRule and an attribute “name” is added to the action node.
- **checkEntityIsTarget:** It receives the name of the entity and the JSON-array with information about target edges. The method iterates through the JSON-array targets, which contains arrays that represent targets edges between actions and entities. It compares the targets entity with the specified entity. If there is a match, it returns true to indicate that the entity is a target.
- **processEntities:** It receives as parameters the JSON-object with information about the entities, the CRule object representing the US to which the entities belong and the JSON-array with information about the targets associated with the entities. The method checks whether primary/secondary entities are present, then creates a CNode for each primary/secondary entity and checks whether the entity is present in the target array. If this is the case, its attribute “name” is annotated for deletion. This method is used within the processContainsEdges method to determine whether an entity involved in a contains relationship is also a target of another entity.
- **processContainsEdges:** It receives the JSON-object to be processed, the JSON array with information about contains/target edges and the US identifier as parameters. It first checks whether both entities belong to contains edges. If both entities exist, an edge is created between them in CRule with the name “contains”. If one of the entities is a target of another entity (as specified in the targets array),

the edge is annotated for deletion. If none of the entities is a target, the edge is annotated as “preserve”.

Figure 55 is a class diagram that illustrates the attributes, operations and relationships related to the RuleCreator class.

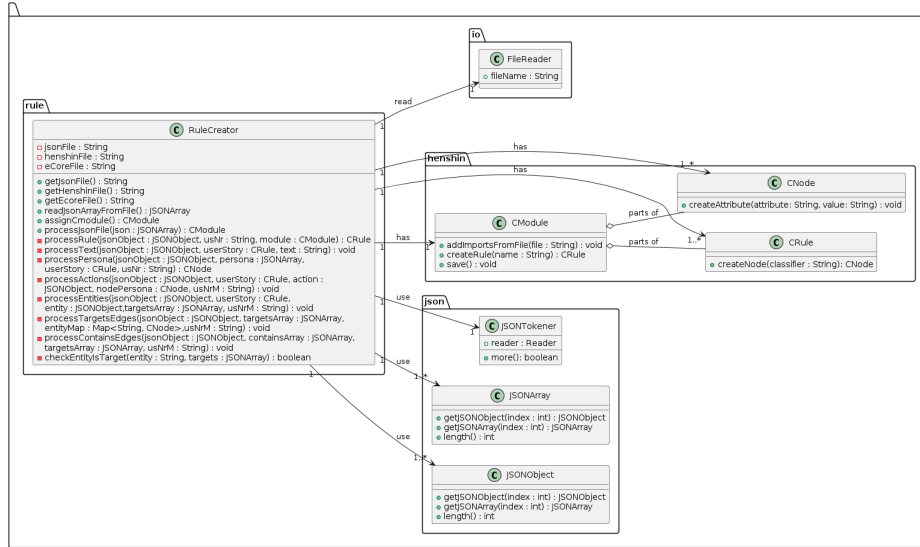


Figure 55: Class diagram of the RuleCreator class and its relationships

## Report Extraction

In order to extracting a textual report associated with a specific backlog, we implement a class called *ReportExtractor* within the package *org.henshin.backlog.code.report*, which include the following classes form the package *org.eclipse.emf.ecore*<sup>40</sup>. These classes are important for reading the content of minimal-model.ecore:

- *org.eclipse.emf.ecore.resource.Resource*: A resource of an appropriate type is created by a resource factory; a resource set indirectly creates a resource using such a factory. A resource is typically contained by a resource set, along with related resources.
- *org.eclipse.emf.ecore.resource.ResourceSet*: A resource set manages a collection of related resources and notifies about changes to this collection. It provides a tree of content. A collection of adapter factories supports the search for an adapter via a registered adapter factory.

<sup>40</sup><https://download.eclipse.org/modeling/emf/emf/javadoc/2.7.0/org.eclipse/emf/ecore/>


- org.eclipse.emf.ecore.EObject: EObject is the root of all modelled objects, therefore all method names start with "E" to distinguish the EMF methods from the client methods. It provides support for the behaviour and functions that are common to all modelled objects.
- org.eclipse.emf.ecore.EPackage: A representation of the model object "EPackage".
- org.eclipse.emf.ecore.EClassifier: A representation of the model object "EClassifier".
- org.eclipse.emf.ecore.EClass: A representation of the model object "EClass".
- org.eclipse.emf.ecore.EAttribute: A representation of the model object "EAttribute".
- org.eclipse.emf.ecore.EReference: A representation of the model object "EReference".

### Storing Redundancy Items into RedundancyItems Class

To save the redundant elements found by the CDA tool, we implement classes to save the elements according to their type.

Figure 56 is a class diagram that illustrates the attributes, operations and relationships related to the RedundancyItems class to store the redundancy elements provided by the CDA tool. The following classes were created to represent the extracted model object accordingly. All these classes are extensions of the class *RedundancyItems*, which contains all extracted model object from "minimal-model.ecore" such as "EClass", "EAttribute" or "EReference":

- PrimaryAction/SecondaryAction: Which has only saved the EClass specified by "Primary/Secondary Action" and the EAttribute model object with the methods *getType* to retrieve the saved EClass and *getName* to retrieve the saved EAttribute.
- PrimaryEntity/SecondaryEntity: Which has only saved the EClass specified by "Primary/Secondary Entity" and the EAttribute model object with the methods *getType* to retrieve the saved EClass and *getName* to retrieve the saved EAttribute.
- Targets: The EClass specified by "Primary/Secondary Action" as *outgoing edge* and an EAttribute model object as *incoming edge* with "Primary/Secondary Entity". The method *getType* retrieve the stored EClass and method *getName* retrieve the stored EAttribute.
- Contains: The EClass specified by "Primary/Secondary Entity" as *outgoing edge* and an EAttribute model object as *incoming edge* with "Primary/Secondary Entity". The method *getType* retrieve the stored EClass and method *getName* retrieve the stored EAttribute.



- 133

- **TriggersPair:** Stores effective value of “*Persona*” as a persona and “*Primary Action*” as an action.

The class `RedundancyItems` contains following methods which are important for class `ReportExtractor`:

- **isInCommonContains:** This method is designed to determine whether a given entity (specified by its name) is part of a redundant pair listed in the “Contains” array of related USs stored in a JSON file.

As input, it receives the name of the entity for which we want to check whether it exists in a redundant pair. In addition, a list of redundant pair objects that represent pairs of entities where one entity contains the other. If there is a match with the parent entity, it returns the child entity and vice versa.

- **isInCommonTargets:** This method is responsible for determining whether a particular action/entity is part of a redundant pair listed in the “Targets” array of related USs stored in a JSON file.

As input, it receives the name and type of the first element, which is an action, and the name and type of the second element, which is an entity. It also receives a list of `TargetsPair` objects, which are pairs of common actions and entities between US-pairs.

For each pair, it checks whether the specified names and types match either the action or entity in the pair. If a match is found, the method returns *true*, which means that the specified elements are part of a redundant pair.

- **printRedundantItems:** This method is responsible for creating a report on redundancy items based on the data stored in the class instance.

As input, it takes several parameters, including a “`FileWriter`” to write to the textual report’s file, lists of different pairs of “Targets”, “Contains” and “Triggers”, and a JSON-object to store the report data in JSON format, which is vital for evaluation.

### **ReportExtractor Class: Methods related to Extracting Redundancy Items**

To extract the redundant elements and save them in a `RedundancyItems` object, we must first iterate through all existing *minimal-mode.ecore* files and extract the redundant redundancy item from each `EPackage`.

Figure 57 is a class diagram that illustrates the attributes, operations and relationship related to the extraction of redundancy items founded by the CDA tool and their storage in a `RedundancyItems` object.

The following methods in the `ReportExtractor` class are responsible for extracting the redundancies found by the CDA tool:

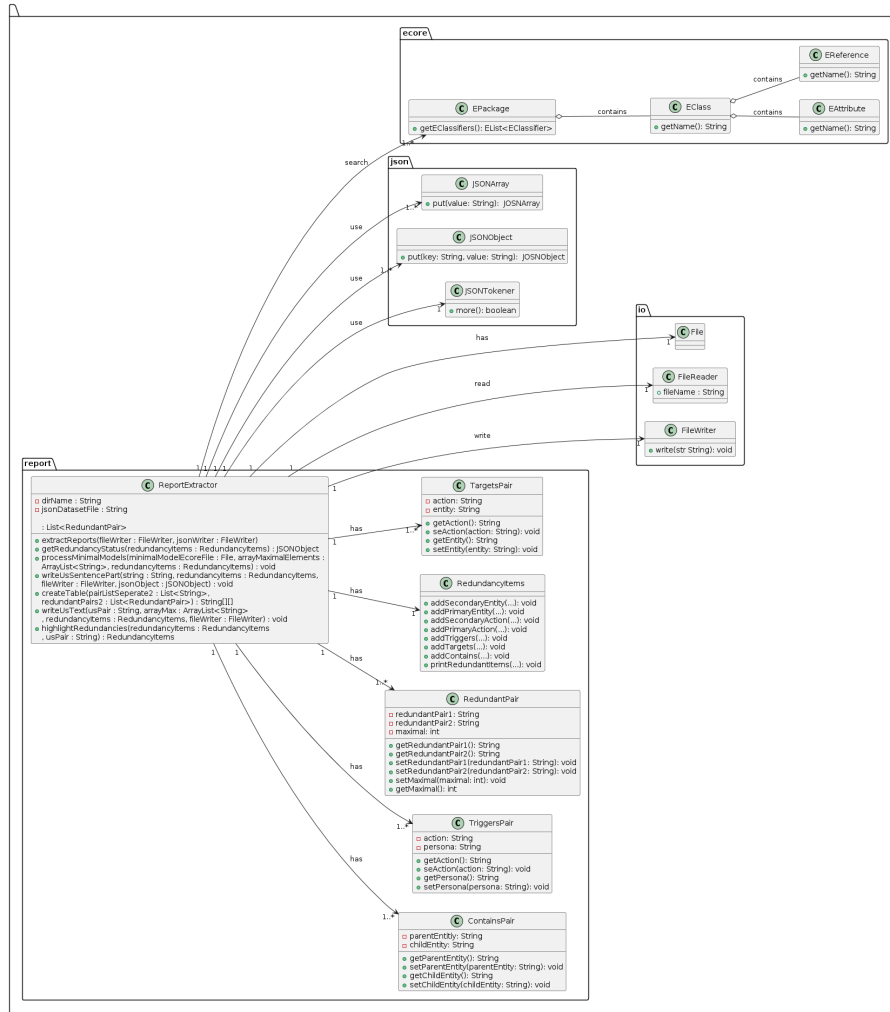


Figure 57: Class diagram for the process of extracting redundancy items

- **extractReports:** This method orchestrates the extraction and analysis of created CDA report from a directory containing conflicted US-pairs and their associated reasons(conflict reason), and generates both text and JSON reports for further investigation and processing.

It receives two `FileWriter` objects as input, one for writing textual and one for JSON reports.

It iterates through each directory in the main directory that represents a conflict pair and uses the *checkIfReportExist* method to make sure that the current US-pair are not already proceeded and the *containsAnd* method to check whether it contains the conjunction “AND” to make sure that it is the valid US-pair name(*e.g.* “user\_stroy\_12\_AND\_user\_stroy\_39” is a valid directory name).



For each valid conflict pair directory, it iterates through the conflict reason directories within the current conflict pair directory and uses the *minimalEcoreExist* method to check whether a *minimal-model.ecore* file exists with reference to a conflict reason.

To identify redundancy items, it uses the method *processMinimalModels* and reads the "minimal-model.ecore" file, processes its content and iterates over the contained EPackages in order to process them further with the method *iteratePackages*, which saves all redundancy items in RedundancyItems object.

In addition, the methods *hasEntitys*, *hasActions* and *hasTargets* are used to check whether the identified elements contain "Primary/Secondary actions" and "Primary/Secondary Entities" with common "Targets" reference. If the identified elements fulfil the criteria, the redundancy pair is included in the report.

It then writes the potentially redundant USs and their clauses to the textual as well as JSON report files for further analysis.

As output, the method returns a list of RedundantPair objects containing information about identified redundancies between US-pairs.

- *createOrOverwriteReportFile*: The method is responsible for creating or overwriting report file. It first ensures the existence of a report file. If the file doesn't exist, it creates a new one; if it already exists, it overwrites the existing file. Finally, it returns a *FileWriter* to allow writing to the report file.
- *checkIfReportExist*: This method takes two parameters, namely US-pair and the list of all previously processed pairs in the CDA report directory. It returns *true* if the US-pair was found in the pairList, which means that a report with the specified pairs has already been executed and therefore does not need to be executed again.
- *minimalEcoreExist*: This method checks the existence of a *minimal-model.ecore* file using a conflict pair and a conflict reason generated by CDA tool.

As input, it receives a conflict pair and a conflict reason. Using these parameters, the method constructs the file path to the minimal-model.ecore file and checks whether the file exists under the constructed path.

If the ECore file exists, the method returns *true*, indicating that the minimal-model.ecore file exists for the examined conflict pair and conflict reason. If the file does not exist, *false* is returned.

- *containsAnd*: This method ensures that the folder name is identified with "\_AND\_", as the report generated by CDA tool is formatted like "user\_story\_<digit>\_AND\_user\_story<digit>". It returns *true* if the examined directory contains "AND", otherwise *false* is returned.
- *processMinimalModels*: This method reads a Minimal Model Ecore file, processes its content and iterates over the contained EPackages in order to process them further with the *iteratePackages* method.

As parameters, it receives a File object that represents examined minimal model ecore file, an array list in which the names of the redundant elements are stored, and a RedundancyItems object that is used to handle redundant elements.

First, a ResourceSet and a ResourceFactoryRegistry corresponding to the minimal model Ecore file are set up and a Resource object is created from the Ecore file; the *iteratePackages* method is called for each EPackage.

- *iteratePackages*: This method identifies redundancies within the attributes and references of EClasses in examined minimal model, stored them accordingly and updates the RedundancyItems object.

It takes several parameters, such as the EPackage to be iterated over, an array list in which the names of the redundant elements are stored, and a RedundancyItems object.

It iterates through every EClassifier in the minimal package that contains EClasses and checks whether “#” is present in EClass; if this is the case, EClass has been recognised as a conflict by CDA tool.

If an attribute is found, the class of the conflicting attribute is determined and added to the corresponding element within RedundancyItems (e.g. Primary/Secondary Action/Entity).

Each EReference is then iterate through in the EClass. Depending on the reference name, the reference is added to the corresponding element within RedundancyItems (e.g. Triggers, Targets, Contains). The method is completed once all EClassifiers within the specified EPackage have been processed.

- *hasActions*: This method is useful for using the data stored in RedundancyItem to determine whether certain actions are present in a list of redundant entries, in order to later check whether the identified elements fulfil the criteria and the redundancy pair is included in the report.

It checks if there’s a match with name of any primary/secondary action stored in the RedundancyItems object. If match is found, it immediately returns *true*.

- *hasEntitys*: This method is used to determine whether certain secondary/primary entities are present in the RedundancyItems object based on their name. For each item, it checks whether there is a match with the name of a primary/secondary entity stored in the RedundancyItems object.

If a match is found, *true* is returned immediately, in order to later check whether the identified elements fulfil the criteria and the redundancy pair is included in the report.

- *hasTargets*: This method uses the content of a RedundancyItems object to determine whether targets are present in a list of founded redundant elements.

As input, it receives an array list with the names of the redundant elements and an object of the type `RedundancyItems`, which contains a collection of founded "Targets".

The method checks whether there is a match with the name of any targets reference stored in the `RedundancyItems` object.

If a match is found between the elements, the method immediately returns *true*, which means that at least one targets reference is present, in order to later check whether the identified elements fulfil the criteria and the redundancy pair is included in the report.

- `readJsonArrayFromFile`: This method provides the ability to read JSON data from a file and convert it into a `JSONArray` object, handling cases where the file is empty or does not exist.

It receives the file path of the JSON file to be read as input. An attempt is made to open the specified file and check whether the file is empty or does not exist. If the file exists and is not empty, it reads the JSON data from the file and creates a JSON array object from the JSON data read from the file and returns the JSON array object with the JSON data.

- `getRedundancyStatus`: This method add statistics like count of main/benefit/total redundancies into JSON report. It receive as input `redundancyItems` and as output write the count of main/benefit/total redundancies into JSON report already defined in method `highlightRedundancies`.

## Methods for Extracting Data from Dataset of Backlog

To get information about USs such as text, redundant clauses in targets/contains/triggers references between US-pairs, we need to extract data from the dataset stored in the JSON file.

The following methods in the `ReportExtractor` class are responsible for extracting data from dataset within JSON file:

- `readJsonArrayFromFile`: This method receives a JSON file as input. After reading, the JSON content is tokenised, parsed into a JSON array and the parsed JSON array is returned.
- `getUssTexts`: This method ensures that the text of the specified US-pair is retrieved from the JSON file and properly assigned to the `RedundancyItems` object for further processing. It receives a US-pair and `RedundancyItems` as input.

It reads a JSON array from a file using the `readJsonArrayFromFile` method, iterates over each JSON object in the array and compares the extracted US identifier with the US identifier extracted from the input US-pair. If a match is found, the text of the first and second USs is set in the `redundancyItems` object.

- `getCommonTargets`: Used to determine overlaps in "Targets" references (pairs of actions and entities) between specified US-pairs from a JSON file.

It receives the identifiers of the US-pair as input. After it finds the US objects, it compares each pair of entries (actions and entities) in "Targets" references of the two USs and looks for matches.

The output is the matches, i.e. the list of common pairs of actions and entities, in "Targets" reference.

- `getCommonContains`: Used to determine overlaps in "Contains" references (pairs of entities) between specified US-pairs from a JSON file.

It receives the identifiers of the US-pair as input. After it finds the US objects, it compares each pair of entities in "Contains" references of the two USs and looks for matches.

The output is the matches, i.e. the list of common pairs of entities, in "Contains" reference.

- `getCommonTriggers`: Used to determine overlaps in "Triggers" references (pairs of personas and actions) between specified US-pairs from a JSON file.

It receives the identifiers of the US-pair as input. After it finds the US objects, it compares each pair of entries (personas and actions) in "Triggers" references of the two USs and looks for matches.

The output is the matches, i.e. the list of common pairs of personas and actions, in "Triggers" reference.

## Methods for Highlighting Words using Hash Symbol(#)

In order to distinguish redundancy words between a US-pair, in text of each US, we decide to highlighting redundant words using hash symbol like "... #<word># ...".

The following methods in the `ReportExtractor` class are responsible for highlighting redundancy words:

- `writeUsText`: This method reads the text of examined US-pair, highlights redundant element between them using *highlightRedundancies* method, writes the highlighted text to a file, and records information about the redundant elements.

As input it receive a US-pair, a list of redundant pairs to store redundant pairs in it, an object `RedundancyItems` containing stored redundancy elements and a `FileWriter` object used for writing output.

It extract the identifier of the two USs from US-pair, retrieves the text of the USs from JSON file and add them to `RedundancyItems`, invoke the *highlightRedundancies* method to identify and highlight redundants between the USs, it writes the highlighted text of each US to the `FileWriter`. Finally, sets the redundant pair and count of redundancy clauses.

- **highlightRedundancies:** This method identifies redundancies between US-pair, applies hash symbols using *applyHashSymbols* method to highlight common items and updates the redundancy counts in the *redundancyItems* object.

It takes two parameters, *redundancyItems* and US-pair, which represents the pair of USs to be analysed.

It checks whether both USs contain a main clause part or whether one of them has a benefit part or whether both USs also have a benefit part.

It applies hash symbols to common elements that only occur in the part of the USs that occurs in the same part (e.g. only main or only benefit part of the USs).

In each condition, it checks if there are redundancy clauses in the main part, then *persona* is also highlighted using *applyHashSymbolPersona* method. It also updates the count of main/benefit/total redundancies and sets the changed text of USs. Finally, it returns the updated *redundancyItems* object.

- **applyHashSymbols:** This method is used to mark certain words within a substring with hash symbols (#) at the beginning and end to ensure that they are distinguishable and can be easily identified or processed later.

It takes a substring in which replacements are to be made and a field of matches containing the words to be surrounded with hash symbols. First, the field of matches is sorted in descending order of length and processed accordingly to avoid adding hash symbols to unwanted clauses.

**Example 5.14.** *For example, let's assume that we have "data" and "data format" as redundancy elements. If we continue first with "data" and then with "import data", "import data" will be replaced by "import #data#", which is not desired.*

- **hasMoreThanFour/SixHashSymbols:** These methods receive a text from the US as input. They are used to check whether there are redundant clauses in the main part of the sentence (it can be one or two clauses). If so, *true* is returned.
- **applyHashSymbolPersona:** This method identifies common "Triggers" references, marks them with hash symbols and returns the changed text parts together with the count of redundant triggers references.

As input, it receives a list of common triggers between US-pair, *RedundancyItems* and the parts of the USs. It iterates through the list of common triggers and checks whether both elements(*persona* and *primary action*) of the triggers are present in both parts.

It then increments the redundancy count to keep track of the count of redundant triggers. The output returned, is the text of USs containing the manipulated text parts with hash symbols and the redundancy count in main part.

- **applyHashSymbolTargets:** This method identifies common targets references between two parts of USs, marks them with hash symbols and returns the changed text parts together with the count of redundant targets references.

As input, it receives a list of common targets between the US-pair, RedundancyItems and the parts of the USs.

It iterates through the list of common targets and checks whether both elements (primary/secondary action and primary/secondary entity) of the targets are present. It then increments the redundancy count in examined part of USs to keep track of the count of redundant targets.

The output returned is the text of USs containing the manipulated text parts with hash symbols and the redundancy count in examined part(main or benefit).

- **applyHashSymbolContaiaans:** This method identifies common contains references between two parts of USs, marks them with hash symbols and returns the changed text parts together with the count of redundant contains references.

As input, it receives a list of common contains between the US-pair, RedundancyItems and the parts of the USs. It iterates through the list of common contains and checks whether both elements of the contains are present in both parts. It then increments the redundancy count to keep track of the count of redundant contains.

The output returned is the text of USs containing the manipulated text parts with hash symbols and the redundancy count in examined part(main or benefit).

## Methods related to Report Divided Parts of USs

To show which part of the USs with redundancy words occur between a US-pair, we have split the individual parts of the USs and included them in the report. The following methods in the ReprortExtractor class are responsible for splitting and reporting the parts of the USs :

- **splitUsText:** This method is used to split the text of two USs into separate sections based on the occurrence of redundancy clauses.

The input is the text of the first and second US and their corresponding identifiers, a FileWriter for writing to a file and a JSON object for processing JSON data.

It splits each US text into three parts using commas and saves the result in arrays. It iterates over parts of the first and second USs and searches for occurrences of hash symbol pairs. For each part, the number of hash symbol pairs found is counted. Finally, all parts of the records that contain hash symbols are written to a text file and a JSON file as well.

- **writeUsSentencePart:** This method facilitates the extraction and storage of highlighted USs parts from US-pair in a textual report file for further analysis.

As input, it receives the US-pair, RedundancyItems and a FileWriter allowing the extracted USs parts to be written. It receives the text of the USs from the redundancyItems object and calls the *splitUsText* method to split the US-pair texts into USs parts with highlighted elements.

The extracted USs parts are also written to the text and JSON report files, using the FileWriter for further processing and analysis.

**Example 5.15.** *Take, for example, the following US-pair:*

*user\_story\_60: #g22# as an it staff member, I want to #know# #how# the #data# is #used#, so that I can determine what kind of basic services and functionalities are required.*

*user\_story\_04: #g22# as a data manager, I want to #know# #how# the #data# is #used#, so that I can develop more detailed usage and support scenarios with researchers.*

*The following sentence parts are candidates for possible redundancies between user stories:*

*user\_story\_04: I want to #know# #how# the #data# is #used#*

*user\_story\_60: I want to #know# #how# the #data# is #used#*

## Methods related to Creating Table

The summary of potential redundancy between US-pairs is presented in a table, which makes it easy to find out which US-pairs have been identified as potentially redundant US-pairs and how many redundancy elements there are in total. The following methods in the ReportExtractor class are responsible for creating a table at the beginning of the text report:

- **writeTable:** This method is used to write a table of potential redundancies between USs and the count of their total redundant clauses *createTable* method.

As input, it receives a File object into which the table is inserted and a list of redundancy pairs containing information about redundant clauses in US-pars.

It reads the existing content of the textual report file into a StringBuilder. It creates a table to display the potential redundancies between USs and the count of total redundancy clauses.

The table headers and contents are generated based on the redundant pairs. It calculates the maximum width for each column in the table to ensure proper formatting. Finally, the table content is written to the FileWriter, followed by the existing content stored in the report's StringBuilder.

- **createTable:** This method prepares the content for the table in which potential redundancies between USs are displayed, taking into account the total redundancy count between each US-pairs based on the RedundantPair objects provided.

As input, it receives a list of unique US-pairs for which the table is to be created and a list of RedundantPair objects containing information about redundant clauses between US-pairs.

It initialises a two-dimensional array containing the contents of the table. The size of the table is determined by the count of unique pairs of USs plus one for the header row and column.

It fills the header row and the first column of the table with unique pairs of US-pairs, replacing “user\_story” with “us” for the purpose of brevity.

It calculates the maximum redundancy count between each US-pair by calling the method *getTotalRedundanciesFromPair*. Finally, it fills the table with the total redundancy count.

The output is a two-dimensional array representing the contents of the table, with each cell containing the maximum redundancy count between the corresponding pair of USs.

- **getTotalRedundanciesFromPair:** This method makes it easier to retrieve the total number of redundancies between a US-pair from a list of RedundantPair objects.

As input, it receives a list of RedundantPair objects containing information about redundant elements in US-pairs, where the first and second USs are to be compared.

It iterates through each RedundantPair object in the RedundantPairs list and checks for each RedundantPair object whether the examined US-pair matches as redundant US-pair.

If a matching pair is found, the maximum redundancy number stored in this RedundantPair object is returned. If no matching pair is found, *zero* is returned, indicating that there are no redundancies between the examined US-pair.

## Report Evaluation

The Evaluation class, found in the *org.henshin.backlog.code.evaluation* package, was created to assess redundancy levels in USs based on JSON reports. This class includes methods that evaluate whether two USs are fully or partially redundant, focusing on various application components within these USs.

Figure 58 is a class diagram that illustrates the attributes, operations of the Evaluation class and its relationship to other classes. The class offers a detailed mechanism to evaluate redundancy through following methods:

- *evaluateRedundancyCriteria:* This method compares elements such as “Triggers”, “Targets” and “Contains” in the “Main” and “Benefit” parts of USs. The method



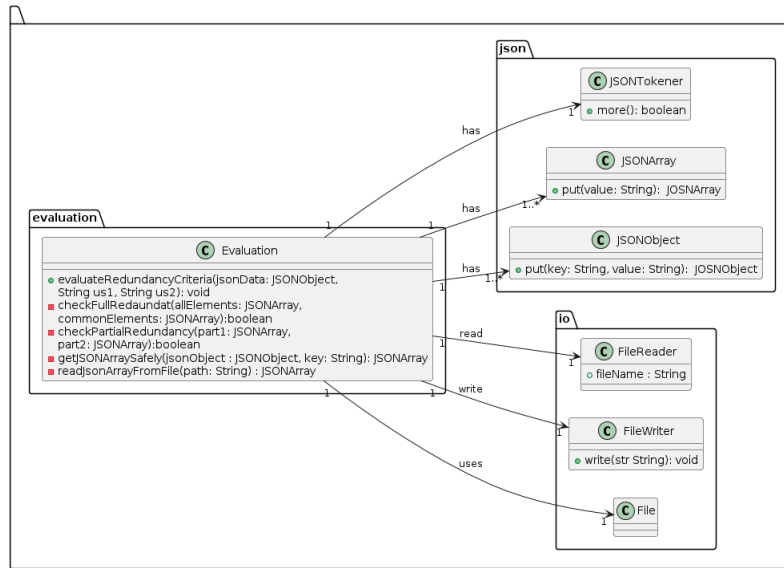


Figure 58: Class diagram related to Evaluation class

checks whether these clauses are fully redundant (i.e. they are identical between USs) or partially redundant (i.e. they share some clauses but are not fully identical).

As input, it receives the JSON object for a specific US-pair.

In particular, it checks various conditions, e.g. whether common clauses are present, whether targets or contains are empty and whether the clauses in the stories are fully or partially identical.

As output, the method updates the JSON report with new keys indicating the redundancy status:

**Main Part Fully Redundant:** A Boolean value indicating whether the "main part" of the USs is fully redundant.

**Main Part Partially Redundant:** A Boolean value that indicates whether the "main part" of the USs is partially redundant.

**Benefit Part Fully Redundant:** A Boolean value that indicates whether the "benefit part" of the USs is fully redundant.

**Benefit Partially Redundant:** A Boolean value that indicates whether the "benefit part" of the USs is partially redundant.

- **checkPartialRedundancy:** The method processes these arrays to identify partial redundancy by checking whether elements from arrays of elements match elements from another array.

It receives the two arrays of elements as input, iterates through each element of the first input array and compares each of these elements with all elements in the

second input array. A match counter records how often elements from the first input array find a match in the second input array.

As output, method returns a Boolean value. True: indicates that there is at least one matching element pair between the two JSON arrays, which means partial redundancy. False: indicates that there are no matching elements, indicating no partial redundancy between these specific parts of the USs.

**Example 5.16.** Assume we have the following JSON arrays for two different USs:

*First JSON array: `[["login", "button"], ["help", "link"]]`*

*Second JSON array: `[["logout", "button"], ["help", "link"]]`*

*The method would determine that the second element of the first array ("help", "link") matches the second element of the second array. As there is at least one match, `checkPartialRedundancy` would return true, indicating partial redundancy.*

- `getJSONArraySafely`: This method is designed to handle JSON operations safely by retrieving JSON array from a JSON object without the risk of throwing exceptions if the specified key does not exist.

As input it receives the JSON object from which the JSON array needs to be extracted and a key corresponding to the JSON array within the provided JSON object.

The method first checks whether the provided key exists in the JSON object. If the key exists, it retrieves the JSON array associated with that key. If the key does not exist, it returns an empty JSON array.

**Example 5.17.** Let's assume that a JSON object representing USs details should contain the key for "Benefit Part", which does not exist:

```
{
  "Common Targets" : {
    "Main Part" : [ ["login", "button"], ["help", "link"] ]
  }
}
```

*If the "Benefit Part" in the "Common Targets" needs to be accessed that does not exist, this is handled safely with `getJSONArraySafely` by returning an empty array to avoid runtime errors.*

- `readJsonArrayFromFile`: The method enables JSON data to be read from a file and converted into a JSON array object. It takes the file path as input and attempts to open the file, checking whether the file is empty or missing. If the file is available and contains data, this data is read, converted into a JSON array object and returned.

## Error Handling

There were erroneous data in datasets that force us to handle them correctly. Therefore, we implement/use the following exceptions to accurately distinguish and handle them.

The following classes, which extend the *Exception* class, are used in the *org.henshin.backlog.code.rule* package and relate to error handling related to the JSON entries in the dataset of the backlogs and to the Ecore meta-model required to create the rules based on it:

- EmptyOrNotExistJsonFile: Is triggered if the JSON file could not be found in the file system.
- ActionInJsonFileNotFound: Is triggered if the entry *Action*, which contains *Primary/Secondary Actions*, is not present in the JSON file and its absence should be reported.
- EntityInJsonFileNotFound: Is triggered if the entry *Entity*, which contains *Primary/Secondary Entity*, is not present in the JSON file and its absence should be reported.
- PersonaInJsonFileNotFound: Is triggered if the entry *Persona* does not exist in the JSON file for a specific US.
- TextInJsonFileNotFound: Is triggered if the entry *Text* does not exist in the JSON file for a specific US.
- UsNrInJsonFileNotFound: Is triggered if the entry *Us\_Nr* does not exist in the JSON file for a specific US.
- EdgeWithSameSourceAndTarget: Refers to the creation of edges in graph transformation rules and is triggered if the source and target of the edge have already been created, then the duplicate edge should be avoided.
- TargetsInJsonFileNotFound: Is triggered if the entry *Targets* does not exist in the JSON file for a specific US.
- ContainsInJsonFileNotFound: Is triggered if the entry in *Contains* is not present as *Primary/Secondary Entity* in the JSON file and its absence should be reported.
- TriggersInJsonFileNotFound: Is triggered if the entry *Triggers* does not exist in the JSON file for a specific US.
- EcoreFileNotFound: Is triggered if the required ECore meta-model file could not be found and should also be reported.

Within the *org.henshin.backlog.code.report* package, special classes that extend the *Exception* class are designed to solve problems related to the CDA report directory, which encapsulates all US-pairs together with the associated conflict reasons. These classes include:

- `CdaReportDirIsEmpty`: This exception is called if the CDA report directory is found but has no content.
- `CdaReportDirIsNotADirectory`: This exception is thrown in scenarios where the path provided for the CDA report directory is either not a directory (e.g. it is a file) or the specified path does not lead to a directory.
- `CdaReportDirNotFound`: This exception is triggered if the CDA report directory cannot be found within the specified path.

## Limitations

There are technical limitations that are causing us to change our implementation strategy. The following limitations should be clarified at the beginning:

- Use Eclipse version 2023-03, as Henshin version 4 cannot be installed with the latest version of Eclipse.
- Working with Java as the programming language, as the Henshin and CDA APIs are only available in the Java programming language.
- CDA API is not yet implemented to take into account conflicts and dependencies for attributes that are crucial for our approach. This forces us to use the CDA graphical user interface(GUI) instead of the CDA API.
- Lack of Henshin documentation regarding methods and classes, which makes it time consuming to understand the methods and make the right decision.

## 5.4 Test

In this section, we aim to validate certain functionalities, check the system requirements and ensure reliability and robustness of implemented classes and methods.

As a test strategy, we perform unit tests with *JUnit* version 4<sup>41</sup> as version 4 is more suitable and compatible with Eclipse version 2023-03.

*EclEmma*<sup>42</sup> as a code coverage tool integrated into the Eclipse IDE is used, to ensure thorough testing and coverage. By using *EclEmma*, we were able to systematically measure the effectiveness of our test suites and determine the test coverage for each individual class.

### Configuration of Test Environment

In the main project *org.henshin.backlog*, we create a separate package called *org.henshin.backlog.test*. This package contains two Java classes namely *ReportExtractorTest.java* and *RuleCreator\_Test.java*, each of which corresponds to the Java source codes accordingly.

---

<sup>41</sup><https://junit.org/junit4/>

<sup>42</sup><https://www.eclEmma.org/>

## Scope of Testing

The scope of the test depends on the system requirements and the two most important implemented classes *ReportExtractorTest.java*, *RuleCreator\_Test.java*, *Evaluation.java* and their methods. The implemented error handling classes are also tested.

## Test Cases and their Code Coverage

We describe the specific test cases that are performed during the tests. Each test case contains a description of the test scenario, the data provided and the expected result. For refining and improving our test cases, we used a code coverage report created by EclEmma in order to increase coverage and ensure a more reliable, error-resistant application.

Table 20 shows the test cases for the RuleCreator.java class and Figure 59 shows the code coverage.

Test Case	Supplied Data	Expected Outcome	Description
testAssignCmodule	Assing a dummy ECore model file	Through an exception: <i>EcoreFileNotFound</i>	Check whether the ECore model already exists and CModule is correctly assigned
ActionNotExist (test-Process.JsonFile)	JSON file with a US without "Action" entry	Through an exception: <i>ActionInJsonFileNotFound</i>	Check whether there is an entry "Action" in the related US in JSON file
EntityNotExist (testProcess.JsonFile)	JSON file with a US without "Entity" entry	Through an exception: <i>EntityInJsonFileNotFound</i>	Check whether there is an entry "Entity" in the related US in JSON file
PersonaNotExist (test-Process.JsonFile)	JSON file with a US without "Persona" entry	Through an exception: <i>PersonaInJsonFileNotFound</i>	Check whether there is an entry "Persona" in the related US in JSON file
TargetsNotExist (test-Process.JsonFile)	JSON file with a US without "Targets" entry	Through an exception: <i>TargetsInJsonFileNotFound</i>	Check whether there is an entry "Targets" in the related US in JSON file
ContainsNotExist (test-Process.JsonFile)	JSON file with a US without "Contains" entry	Through an exception: <i>ContainsInJsonFileNotFound</i>	Check whether there is an entry "Contains" in the related US in JSON file
ContainsInTargets (test-Process.ContainsEdges)	JSON file with a US which the entity in "Contains" entry also belong to Targets	The entity in Contains should be annotated as <Delete>	Check whether entity in Targets have connection as Contains, if so entity in Contains should also annotated as <Delete>
TriggersNotExist (test-Process.JsonFile)	JSON file with a US without "Triggers" entry	Through an exception: <i>TriggersInJsonFileNotFound</i>	Check whether there is an entry "Triggers" in the related US in JSON file
DuplicateTriggers (test-Process.ContainsEdges)	JSON file with a US with duplicate Triggers entries	Through an exception: <i>EdgeWithSameSourceAndTarget</i>	Verify whether there is duplicated entries in Triggers JSON-array

Test Case	Supplied Data	Expected Outcome	Description
TextNotExist (testProcessJsonFile)	JSON file with a US without “Text” entry	Through an exception: <i>TextInJsonFileNotFound</i>	Check whether there is an entry “Text” in the related US in JSON file
UsNrNotExist (testProcessJsonFile)	JSON file with a US without “Us_Nr” entry	Through an exception: <i>UsNrInJsonFileNotFound</i>	Check whether there is an entry “US_Nr” in the related US in JSON file
UndefinedEntity (testProcessContainsEdges)	Specify an entity that is not contained as “Entity” in the JSON file, but appears as “Contains”	Through an exception: <i>EntityInJsonFileNotFound</i>	Check whether the entity that appears in the <i>Contains</i> entry has already been identified as an entity
PrimaryActionNotFound (testProcessTargetsEdges)	Specify a primary action that is not contained as “Primary Action” in the JSON file, but appears as “Targets”	Through an exception: <i>ActionInJsonFileNotFound</i>	Check whether the primary action that appears in the <i>Targets</i> entry has already been identified as a primary action
PrimaryEntityNotFound (testProcessTargetsEdges)	Specify a primary entity that is not contained as “Primary Entity” in the JSON file, but appears as “Targets”	Through an exception: <i>EntityInJsonFileNotFound</i>	Check whether the primary entity that appears in the <i>Targets</i> entry has already been identified as a primary entity
SecondaryActionNotFound (testProcessTargetsEdges)	Specify a secondary action that is not contained as “Secondary Action” in the JSON file, but appears as “Targets”	Through an exception: <i>ActionInJsonFileNotFound.class</i>	Check whether the secondary action that appears in the <i>Targets</i> entry has already been identified as a secondary action
SecondaryEntityNotFound (testProcessTargetsEdges)	Specify a secondary entity that is not contained as “Secondary Entity” in the JSON file, but appears as “Targets”	Through an exception: <i>EntityInJsonFileNotFound.class</i>	Check whether the secondary entity that appears in the <i>Targets</i> entry has already been identified as a secondary entity
UndefinedEntity (testProcessTargetsEdges)	Specify an entity that is not contained as “Entity” in the JSON file, but appears as “Targets”	Through an exception: <i>EntityInJsonFileNotFound</i>	Check whether the entity that appears in the <i>Targets</i> entry has already been identified as an entity
ActionNotFound	Provision of a JSON file that contains actions in <i>Targets</i> that are not entered in primary/secondary action	Through an exception: <i>EntityInJsonFileNotFound</i>	Verify whether the action that appear in the <i>Targets</i> entry has already been identified as an action
ReadJsonArrayFromFile	Assign a dummy JSON file	Through an exception: <i>EmptyOrNotExistJsonFile</i>	Check whether the JSON file already exists
EmptyOrNotExistJsonFile	Assign an empty JSON file	Through an exception: <i>EmptyOrNotExistJsonFile</i>	Check whether the JSON file is empty

Table 20: Test cases for RuleCreator class

Table 21 shows the test cases for the ReportExtractor.java class and Figure 60 shows

## RuleCreator

Element	Missed Instructions	Cov.	Missed Branches	Cov.	Missed	Cxty	Missed	Lines	Missed	Methods
main(String[])	1	0 %		n/a	1	1	3	3	1	1
processJsonFile(JSONArray)		100 %		100 %	0	10	0	53	0	1
processEntities(JSONObject_CRule_JSONObject_JSONArray_Map_String)		100 %		100 %	0	7	0	31	0	1
processActions(JSONObject_CRule_JSONObject_CNode_Map_String)		100 %		100 %	0	5	0	21	0	1
processTargetsEdges(JSONObject_JSONArray_Map_Map_String)		100 %		100 %	0	4	0	18	0	1
processContainsEdges(JSONObject_JSONArray_Map_Map_String)		100 %		90 %	1	6	0	15	0	1
createRules(String)		100 %		n/a	0	1	0	7	0	1
processPerson(JSONObject_JSONArray_CRule_String)		100 %		n/a	0	1	0	4	0	1
processText(JSONObject_CRule_String)		100 %		n/a	0	1	0	4	0	1
readJSONArrayFromFile()		100 %		100 %	0	2	0	6	0	1
getJsonFileAbsolutePath()		100 %		100 %	0	2	0	4	0	1
checkEntityIsTarget(String_JSONArray)		100 %		100 %	0	3	0	6	0	1
getEcoreFileAbsolutePath()		100 %		100 %	0	2	0	4	0	1
assignCmodule()		100 %		100 %	0	2	0	5	0	1
RuleCreator(String_String_String)		100 %		n/a	0	1	0	5	0	1
processRule(JSONObject_String_CModule)		100 %		n/a	0	1	0	2	0	1
getJsonFile()		100 %		n/a	0	1	0	1	0	1
getHenshinFile()		100 %		n/a	0	1	0	1	0	1
getEcoreFile()		100 %		n/a	0	1	0	1	0	1
Total	5 of 923	99 %	1 of 66	98 %	2	52	3	191	1	19

Figure 59: Code coverage related to class RuleCreator

the code coverage.

Test Case	Supplied Data	Expected Outcome	Description
testEmptyDirectroy	Assing a dummy direc- tory	Through an excep- tion: <i>CdaReport- DirIsEmpty.class</i>	Check if CDA Report di- rectory is empty
testEmptyJSONFile	Assing an empty JSON dataset file	Through an exception: <i>EmptyOrNotExistJson- File</i>	Check if JSON dataset file is empty
testCdaDirNotDirectroy	Assing a file instead of CDA directory	Through an excep- tion: <i>CdaReportDirIsNotA Directory</i>	Check if assigned path is a directory
testCdaDirectroy	Assing a not readable di- rectory	Through an excep- tion: <i>CdaReportDir NotFound</i>	Check whether CDA di- rectory is accessible
testFinalReportDir	Assign an empty dataset directory	Return <i>false</i> if the as- signed directory is empty	Check if directory of datasets are empty
testMinimalEcoreExist	Assign a CDA direc- tory without minimal- ecore file	Return <i>false</i> if the minimal-ecore file not found	Check whether the Ecore file already exist in CDA directory
testWriteTable	Provide a CDA report for a US-pair	A table should be created in the report file	Check whether the table for US-pairs has already been created
completeMajorElements Edge (testExtractReports)	Provision of a CDA re- port for US-pair with ex- actly one “Targets” edge	Inclusion of this US-pair in the text report with the nodes “Action”, “En- tity” and “Targets” edge	Verifies <i>extractReports</i> method when all major elements are present in the CDA report
completeMajorElements Upper Edge (testExtractReports)	Provide a CDA report for a US-pair with at least one “Targets” edge and redundancy ele- ments such as Triggers	Generated textual report contains information about Secondary Enti- ties, Secondary Actions, Targets, and Triggers	Verifies <i>extractReports</i> method when all major elements are present in the CDA report and the upper edge case is reached

Test Case	Supplied Data	Expected Outcome	Description
notCompleteMajor Elements (testExtractReports)	Provide a CDA report for a US-pair without “Targets” edge, but with action and entity	The US-pair should not reported	Verifies the behavior of the <i>extractReports</i> method when not all major elements are present in the input data
getBenefitPart RedundanciesElements (testExtractReports)	Provision of a CDA report for a US-pair that only contains redundancy clauses in the “Benefit” part	Check whether the count of redundancy clauses in the benefit part of the USs matches the value “Benefit Part Redundancy Clause” specified in the JSON_Report file	Verifies the behaviour of the <i>extractReports</i> method when there are redundancy elements in the benefit part of USs
getMainPartRedundancies Elements (testExtractReports)	Provision of a CDA report for a US-pair that only contains redundancy clauses in the “Main” part	Check whether the count of redundancy clauses in the main part of the USs matches the value “Main Part Redundancy Clause” specified in the JSON_Report file	Verifies the behaviour of the <i>extractReports</i> method when there are redundancy elements only in the main part of USs
getTotalRedundancy Elements (testExtractReports)	Provision of a CDA report for a US-pair that contains redundancy clauses in the “Main” and “Benefit” parts	Check whether the count of redundancy clauses in the main and benefit parts of the USs matches the value “Total Redundancy Clause” specified in the JSON_Report file	Verifies the behaviour of the <i>extractReports</i> method when there are redundancy elements in the main and benefit parts of USs
highlightPersona (testExtractReports)	Providing a CDA report for a US-pair with redundancy clause in “Triggers” edge (from Persona to Primary Action)	The persona should only be marked with hash symbol if there is a redundant clause in the main part	Checks the behaviour of the <i>extractReports</i> method when highlighting redundant persona in USs
BenefitInBothUss (testhighlightRedundancies)	Provision of a CDA report for a US-pair where both USs have the “benefit” part	Search both the main and the benefit parts of USs and mark redundancy clauses with a hash symbol if they occur	Verifies the behaviour of the <i>highlightRedundancies</i> method when both USs have benefit part
noBenefitInBothUss (testhighlightRedundancies)	Provision of a CDA report for a US-pair where both USs do not have the “benefit” part	Search only the main part of USs and mark redundancy clauses with a hash symbol	Verifies the behaviour of the <i>highlightRedundancies</i> method when both USs don’t have benefit part
noBenefitInUs1 (testhighlightRedundancies)	Provision of a CDA report for a US-pair where only the second US have the “benefit” part	Search only the main part of USs and mark redundancy clauses with a hash symbol	Verifies the behaviour of the <i>highlightRedundancies</i> method when only the second US have benefit part
noBenefitInUs2 (testhighlightRedundancies)	Provision of a CDA report for a US-pair where only the first US have the “benefit” part	Search only the main part of USs and mark redundancy clauses with a hash symbol	Verifies the behaviour of the <i>highlightRedundancies</i> method when only the first US have benefit part



Test Case	Supplied Data	Expected Outcome	Description
ContainInBenefitPart (testHighlightRedundancies)	Provide a CDA report for a US-pair with redundancy clauses of “Contains” within “Benefit” part	The entities included in Contains should be marked with hash symbol	Checks the behaviour of the <i>highlightRedundancies</i> method when highlighting redundant entities included in the Contains
ContainInMainPart (testHighlightRedundancies)	Provide a CDA report for a US-pair with redundancy clauses of “Contains” within “Main” part	The entities included in Contains should be marked with hash symbol	Checks the behaviour of the <i>highlightRedundancies</i> method when highlighting redundant entities included in the Contains
TargetsInMainPart (testHighlightRedundancies)	Provide a CDA report for a US-pair with redundancy clauses with more than one “Targets” within the “Main” part	Founded redundancy clauses should also be marked with a hash symbol, if the main part contains more than one redundancy clause as Targets	Check the behaviour of the <i>highlightRedundancies</i> method if there is more than one redundancy clause as Targets in main part
TargetsInBenefitPart (testHighlightRedundancies)	Provide a CDA report for a US-pair with redundancy clauses with more than one “Targets” within the “Benefit” part	Founded redundancy clauses should also be marked with a hash symbol, if the benefit part contains more than one redundancy clause as Targets	Check the behaviour of the <i>highlightRedundancies</i> method if there is more than one redundancy clause as Targets in benefit part

Table 21: Test cases for ReportExtractor class

Table 22 shows the test cases for the Evaluation.java class and Figure 61 shows the code coverage.

Test Case	Supplied Data	Expected Outcome	Description
testEmptyOrNotExist JsonFile	Provision of a dummy JSON file	Through an exception: <i>EmptyOrNotExist JsonFile</i>	Check whether the provided JSON file already exists and is not empty
testJsonFile	Provision of a JSON file which is not accessible	Through an exception: <i>IOException</i>	Check whether the provided JSON file is accessible
main/benefitFull_Case1	Provide a JSON file with US-pair that have no common textitContains entries but have common <i>Targets</i> entries in main/benefit part	In JSON report the entry “Main/Benefit Part Fully Redundant” should be <i>true</i>	Check whether US-pair without <i>Contains</i> entries can also be fully redundant in main/benefit part
main/benefitFull_Case2	Provide a JSON file with US-pair that have not common textitContains entries but one US has entries as Contains in main/benefit	In JSON report the entry “Main/Benefit Part Fully Redundant” should be <i>true</i>	Check whether US-pair without common <i>Contains</i> entries can also be fully redundant in main/benefit part

Test Case	Supplied Data	Expected Outcome	Description
main/benefitFull_Case3	Provide a JSON file with US-pair that have common textitContains entries but one US have additional entries as Contains in main/benefit part	In JSON report the entry "Main/Benefit Part Fully Redundant" should be <i>true</i>	Check whether USs with additional <i>Contains</i> entries from common contains can also be fully redundant in main/benefit part
main/benefitFull_Case4	Provide a JSON file with US-pair that have exactly common textitContains entries as well as common <i>Targets</i> in main/benefit part	In JSON report the entry "Main/Benefit Part Fully Redundant" should be <i>true</i>	Check whether USs with <i>Contains</i> and <i>Targets</i> entries can also be fully redundant in main/benefit part
mainBenefitFull	Provide a JSON file with US-pair that all clauses in the main and benefit parts are identical	The JSON report the entries "Main Part Fully Redundant" and "Benefit Part Fully Redundant" should be <i>true</i>	Check that all clauses in the main and benefit part are identical, main and benefit part are evaluated as fully redundant
mainPartial_Case1	Provide a JSON file with a US-pair whose entries in <i>Targets</i> are partially identical	In the JSON report, the entry "Main Part Partially Redundant" should be <i>true</i>	Check whether USs with partially redundant entries in <i>Targets</i> are evaluated as partially redundant
mainPartial_Case2	Provide a JSON file with a US-pair whose entries in <i>Contains</i> are partially identical	In the JSON report, the entry "Main Part Partially Redundant" should be <i>true</i>	Check whether USs with partially redundant entries in <i>Contains</i> are evaluated as partially redundant
benefitParial	Provide a JSON file with US-pair where only some clauses in <i>Targets</i> and <i>Contains</i> entries are common	In the JSON report, the entry "Benefit Part Partially Redundant" should be <i>true</i>	Check whether USs with partially common <i>Targets</i> and <i>Contains</i> entries are evaluated as partially redundant
mainFullBenefitPartial	Provide a JSON file with US-pair where all clauses in the main part and some in the benefit part are identical	In the JSON report, the entry "Main Part Fully Redundant" and "Benefit Part Partially Redundant" should be <i>true</i>	Check whether the main part is evaluated as fully redundant if all clauses are identical and the benefit part is evaluated as partially redundant if some clauses are identical
mainPartialBenefitFull	Provide a JSON file with US-pair where some clauses in the main part and all in the benefit part are identical	In the JSON report, the entry "Main Part Partially Redundant" and "Benefit Part Fully Redundant" should be <i>true</i>	Check whether the main part is evaluated as partially redundant if some clauses are identical and the benefit part is evaluated as fully redundant if all clauses are identical

Table 22: Test cases for Evaluation class

## ReportExtractor

Element	Missed Instructions	Cov.	Missed Branches	Cov.	Missed	Cxty	Missed	Lines	Missed	Methods
splitUsText(String,String,String,String,FileWriter,JSONObject)	<div></div>	100 %	<div></div>	100 %	0	9	0	27	0	1
reportExtractor(String[])	<div></div>	100 %	<div></div>	100 %	0	2	0	15	0	1
createTable(List,List)	<div></div>	100 %	<div></div>	100 %	0	4	0	13	0	1
getAbsolutePath(Path)	<div></div>	100 %	<div></div>	100 %	0	6	0	15	0	1
getUsTexts(String,RedundancyItems)	<div></div>	100 %	<div></div>	100 %	0	4	0	13	0	1
hasActions(ArrayList,RedundancyItems)	<div></div>	100 %	<div></div>	100 %	0	6	0	8	0	1
hasEntities(ArrayList,RedundancyItems)	<div></div>	100 %	<div></div>	100 %	0	6	0	8	0	1
applyHashSymbols(String,String[])	<div></div>	100 %	<div></div>	100 %	0	2	0	4	0	1
getTotalRedundanciesFromPair(List,String,String)	<div></div>	100 %	<div></div>	100 %	0	6	0	6	0	1
checkIfReportExists(String,List)	<div></div>	100 %	<div></div>	100 %	0	2	0	7	0	1
hasTargets(ArrayList,RedundancyItems)	<div></div>	100 %	<div></div>	100 %	0	4	0	5	0	1
minimalCoreExists(String,String)	<div></div>	100 %	<div></div>	100 %	0	2	0	4	0	1
getAllTargetsInBenefit(String,String,String,JSONObject)	<div></div>	100 %	<div></div>	100 %	0	2	0	8	0	1
getAllContainsInBenefit(String,String,String,JSONObject)	<div></div>	100 %	<div></div>	100 %	0	2	0	8	0	1
getAllTargetsInMain(String,String,String,JSONObject)	<div></div>	100 %	<div></div>	100 %	0	2	0	7	0	1
getAllContainsInMain(String,String,String,JSONObject)	<div></div>	100 %	<div></div>	100 %	0	2	0	7	0	1
getAbsolutePathFinalReportDir()	<div></div>	100 %	<div></div>	100 %	0	2	0	4	0	1
readJsonArrayFromFile(String)	<div></div>	100 %	<div></div>	100 %	0	2	0	6	0	1
processElements(String,String,String,JSONObject)	<div></div>	100 %	<div></div>	100 %	0	3	0	4	0	1
getFinalReportDir(Path)	<div></div>	100 %	<div></div>	100 %	0	2	0	4	0	1
hasMoreThanFourHashSymbols(String)	<div></div>	100 %	<div></div>	100 %	0	2	0	2	0	1
containsAnd(String)	<div></div>	100 %	<div></div>	100 %	0	2	0	3	0	1
lambda\$0\$0(int)	<div></div>	100 %	<div></div>	100 %	0	2	0	1	0	1
lambda\$2\$0(int)	<div></div>	100 %	<div></div>	100 %	0	2	0	1	0	1
highlightRedundancies(RedundancyItems,String,List,List,JSONObject)	<div></div>	87 %	<div></div>	87 %	3	13	0	104	0	1
getCommonTargets(String,JSONObject)	<div></div>	87 %	<div></div>	87 %	4	17	0	69	0	1
getCommonContains(String,JSONObject)	<div></div>	87 %	<div></div>	87 %	4	17	0	68	0	1
writeTable(File,List)	<div></div>	87 %	<div></div>	87 %	2	9	0	28	0	1
iteratePackages(EPackage,ArrayList,ArrayList,RedundancyItems)	<div></div>	85 %	<div></div>	85 %	4	16	0	32	0	1
getCommonTriggers(String)	<div></div>	81 %	<div></div>	81 %	4	12	0	27	0	1
extractReports(FileWriter,FileWriter)	<div></div>	80 %	<div></div>	80 %	6	16	0	59	0	1
applyHashSymbolTargetsMain(List,List,RedundancyItems,String,String,JSONObject)	<div></div>	75 %	<div></div>	75 %	3	7	0	27	0	1
applyHashSymbolContainsMain(List,RedundancyItems,String,String,JSONObject)	<div></div>	70 %	<div></div>	70 %	3	6	0	21	0	1
applyHashSymbolTargetsBenefit(List,List,RedundancyItems,String,String,JSONObject)	<div></div>	66 %	<div></div>	66 %	4	7	2	26	0	1
applyHashSymbolPersonal(List,RedundancyItems,String,String)	<div></div>	66 %	<div></div>	66 %	2	4	0	13	0	1
processMinimalModels(File,ArrayList,ArrayList,RedundancyItems)	<div></div>	60 %	<div></div>	60 %	4	6	0	11	0	1
applyHashSymbolContainsBenefit(List,RedundancyItems,String,String,JSONObject)	<div></div>	58 %	<div></div>	58 %	5	7	2	23	0	1
createOrOverwriteReportFile(File)	<div></div>	50 %	<div></div>	50 %	1	2	2	6	0	1
hasMoreThanSixHashSymbols(String)	<div></div>	50 %	<div></div>	50 %	1	2	0	2	0	1
main(String[])	<div></div>	0 %	<div></div>	n/a	1	1	2	2	1	1
writeUsText(String,ArrayList,List,RedundancyItems,FileWriter,List,List,JSONObject)	<div></div>	100 %	<div></div>	n/a	0	1	0	17	0	1
getRedundancyStatus(RedundancyItems)	<div></div>	100 %	<div></div>	n/a	0	1	0	5	0	1
writeUsSentencePart(String,RedundancyItems,FileWriter,JSONObject)	<div></div>	100 %	<div></div>	n/a	0	1	0	6	0	1
getClassName(String)	<div></div>	100 %	<div></div>	n/a	0	1	0	2	0	1
ReportExtractor(String,String)	<div></div>	100 %	<div></div>	n/a	0	1	0	4	0	1
getRefName(String)	<div></div>	100 %	<div></div>	n/a	0	1	0	2	0	1
getAttName(String)	<div></div>	100 %	<div></div>	n/a	0	1	0	2	0	1
getUsName1(String)	<div></div>	100 %	<div></div>	n/a	0	1	0	1	0	1
getUsName2(String)	<div></div>	100 %	<div></div>	n/a	0	1	0	1	0	1
getDirName()	<div></div>	100 %	<div></div>	n/a	0	1	0	1	0	1
getJsonDatasetFile()	<div></div>	100 %	<div></div>	n/a	0	1	0	1	0	1
Total	35 of 3 863	99 %	50 of 357	85 %	51	231	8	738	1	51

Figure 60: Code coverage related to class ReportExtractor

## 5.5 Evaluation

In this section, we address two different research questions and provide a detailed explanation of the experimental design and execution for each question. We also present a detailed analysis of the results to provide answers to these research questions, highlight their implications and provide insights into the research findings.

### Research Questions

The research questions addressed in this section are as follows:

1. Does our tool reliably determine the level of redundancy —either partial or full— between different parts of USs (main and benefit)?
2. How does the tool’s performance scale when the number of USs in a backlog increases?

## Evaluation

Element	Missed Instructions	Cov.	Missed Branches	Cov.	Missed Cxty	Missed Lines	Missed Methods
• <a href="#">evaluateRedundancyCriteria(JSONObject_String_String)</a>	<div><div></div></div>	98 %	<div><div></div></div>	79 %	30 76	0 99	0 1
• <a href="#">checkFullRedundancy(JSONArray_JSONArray)</a>	<div><div></div></div>	94 %	<div><div></div></div>	70 %	3 6	0 12	0 1
• <a href="#">checkPartialRedundancy(JSONArray_JSONArray)</a>	<div><div></div></div>	100 %	<div><div></div></div>	100 %	0 8	0 14	0 1
• <a href="#">readJSONArrayFromFile(String)</a>	<div><div></div></div>	100 %	<div><div></div></div>	100 %	0 2	0 8	0 1
• <a href="#">getJSONArraySafely(JSONObject_String)</a>	<div><div></div></div>	100 %	<div><div></div></div>	100 %	0 2	0 1	0 1
• <a href="#">Evaluation()</a>	<div><div></div></div>	100 %	n/a		0 1	0 2	0 1
Total	8 of 613	98 %	34 of 178	80 %	33 95	0 136	0 6

Figure 61: Code coverage related to class Evaluation

## Methodology

To address the first questions "Does our tool reliably determine the level of redundancy—either partial or full—between different parts of USs (main and benefit)?", we recap the methodology employed to analyse redundancy between USs. We utilized a systematic approach that involved several key steps:

- **Data Collection:** For a comprehensive assessment, we applied our approach to 19 backlog datasets presented by Mosser et al.<sup>43</sup>. They applied the Doccano approach to these publicly available requirements datasets[10].

It is also worth noting that some backlog datasets (g02, g13, g17, g27) did not follow the expected sentence structure, which is why we did not include them in the evaluation results to avoid unexpected behaviour. Table 23 shows the project number of each dataset and the count of USs.

Item	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	
Project Nr.	g03	g04	g05	g08	g10	g11	g12	g14	g16	g18	g19	g21	g22	g23	g24	g25	g26	g27	g28	Total USs
Total USs	57	51	53	66	97	73	54	67	66	102	137	69	83	56	53	100	100	114	60	1458

Table 23: Project number and count of USs contained in each backlog dataset

- **Identification of main and benefit parts:** Each US was divided into its main part, which is the core functionality, and its benefit part, which describes the value to the persona.
- **Detection of overlapping clauses:** Recognition of overlapping clauses between a US-pair in a specific part of the USs.
- **Redundancy analysis in main and benefit parts:** Based on the redundant clauses identified, an automatic redundancy analysis was performed for the main and benefit parts of the US-pair based on certain criteria indicating the level of redundancy (partial or full) in the main and benefit parts.

<sup>43</sup><https://github.com/ace-design/nlp-stories>

## Ground Truth Evaluation of US Redundancy

Answering the first research question requires our automated system to have a reference point against which its accuracy can be measured. This reference point or "ground truth" is derived from a personal assessment and serves as a benchmark for the tool's performance.

In contrast to the tool evaluation, we did not evaluate based on labels (e.g., action, entity, persona, targets, etc.) in the personal evaluation. This means that when evaluating ground truth, we evaluate partial and full redundancy based on the phrases occurring in a given part as a one-to-one comparison.

The ground truth is the final assessment against which automated results are compared. It is derived from the personal judgement of a subject matter expert (in this case myself) using a combination of expertise, experience and specific evaluation criteria. The personal assessment is targeted at providing a reliable and accurate reference for redundancy between USs.

The following criteria were taken into account in the personal assessment:

- A US-pair is evaluated as fully redundant in the main part, if all phrases occurred in the main parts of both USs fully overlap with one-to-one comparison. For example, the following US-pair is assessed as fully redundant:  
user\_story\_01: "#g14# as a #publisher#, i want to #publish# a #dataset#, so that i can view just the dataset with a few people."  
user\_story\_02: "#g14# as a #publisher#, i want to #publish# a #dataset#, so that i can share the dataset publicly with everyone."
- A US-pair is considered fully redundant in the main part, if all phrases in the main part of at least one US completely overlap. For instance:  
user\_story\_22: "#g14# as a #consumer#, i want to #view# a #data package# online, so that i can #get# a #sense# of whether this is the dataset i want."  
user\_story\_24: "#g14# as a #consumer#, i want to #view# the #data package#, so that that i can #get# a #sense# of whether i want this dataset or not."
- A US-pair is categorised as partially redundant in the main part if some phrases remain distinctive between the USs. For Instance:  
user\_story\_09: "#g04# as a #user#, i want to be able to #view# a #map display# of the public recycling bins around my #area#."  
user\_story\_10: "#g04# as a #user#, i want to be able to #view# a #map display# of the special waste drop off sites around my #area#."
- The criteria mentioned were also applied to the benefit part.

Table 24 shows the aggregation of full and partial redundancies in the main and benefit parts as ground truth. As we can see, the main parts of the US-pairs have less full redundancy (15 cases), which means that there are 15 cases where the main part of the

Project Nr.	G03	G04	G05	G08	G10	G11	G12	G14	G16	G18	G19	G21	G22	G23	G24	G25	G26	G27	G28	Grand Total
Main Partial		2	15	17	13	8	2	5	2	159	512	13	26	6	10	38	9	7	31	875
Main Full								2	1	4		1	3			2		2		15
Benefit Partial	2	1	2	5		6	1	6		3		2	10		1		1	2		42
Benefit Full		1	14	18	3	3	1	1		3		3	13		4			1		65

Table 24: Detail about full and partial redundancies related to main or benefit parts as ground truth

US-pairs is exactly the same. This level of redundancy indicates common functionality of the US-pairs, which is a sign of overlapping features.

A much higher occurrence of partial redundancy in the main parts(875 cases) indicates that there are common elements between the US-pairs, but still enough differences to avoid a complete match.

Fewer instances of partial redundancy in the benefit parts (42 cases) indicate that the USs diverge in their benefit clauses, they are more tailored to specific project outcomes.

The higher count of full redundancies (42 cases) compared to partial redundancies in the benefit parts is interesting, as it indicates that the expected objectives of certain features are often repeated in the USs. This suggests that the project is aiming for a set of common goals regardless of the specific functionality.

### Evaluation of US Redundancy using Tool

The automated tool is designed to identify redundancy among USs based on predefined criteria. It operates by analysing the text and structure of USs to detect similarities that could indicate redundancy.

In contrast to ground truth, which is based on one-to-one comparison of phrases in specific parts of USs, tool evaluation relies heavily on specified labelling (targets, triggers, contains) using the Doccano tool.

The following criteria are defined for the evaluation of US-pairs:

- Full redundancy: A pair of US is considered to have "full redundancy" in the main or benefit part when every labelled clause in that part—comprising triggers (in the main part), targets, and contains—is syntactically identical.
- Partial redundancy: When only some labelled clauses, such as targets, have significant overlap but are not completely identical. This means that while certain labelled clauses, such as targets, may match between USs, other labelled clauses, such as triggers or contains, may differ, meaning that the USs are not fully redundant. This scenario suggests that while USs have significant similarities, they still contain unique aspects.

Table 25 shows the aggregation of the full and partial redundancies in the main and benefit parts assessed by the tool. It is also worth noting that the numbers highlighted in red show the variation in the ground truth evaluation.

Project Nr.	G03	G04	G05	G08	G10	G11	G12	G14	G16	G18	G19	G21	G22	G23	G24	G25	G26	G27	G28	Grand Total
Main Part Partial		2	14	17	13	8	1	5	2	159	477	13	26	5	10	31	9	7	27	826
Main Part Full			1				1	2	1	4	35	1	3	1		9		2	4	64
Benefit Partial	1		1	2		6	1	3		3		2	10		1			1		31
Benefit Full	1	2	15	21	3	3	1	4		3		3	13		4		1	2		76

Table 25: Aggregation of the count of full and partial redundancies in relation to the main or benefit parts assessed by the tool

**Assessment of Result: High-Level Overview** Based on the datasets provided, it was found that 1,851 redundancy clauses were identified across all projects, with the highest count found in the backlog G19 dataset (925 clauses), indicating a significant presence of redundancy in the USs of this project.

Table 26 shows the total number of redundancy clauses found in each dataset.

Project Nr.	G03	G04	G05	G08	G10	G11	G12	G14	G16	G18	G19	G21	G22	G23	G24	G25	G26	G27	G28	Grand Total
Main Part Redundancy Clauses	0	4	30	31	25	11	4	11	5	274	925	24	67	12	24	89	18	19	90	1663
Benefit Part Redundancy Clause	2	2	31	64	5	9	2	7	0	9	0	7	38	0	8	0	1	3	0	188
Total Redundancy Clause	2	6	61	95	30	20	6	18	5	283	925	31	105	12	32	89	19	22	90	1851

Table 26: Detail about number of redundancy clauses occurred in main and benefit parts

**Assessment of Result: Aggregated Analysis** We also look for an aggregate for the count of redundant clauses in both the main and the benefit parts of the USs.

In the main parts, the large count of full redundancies, especially where two clauses are present (6 clauses), indicates a high degree of similarity in the functionalities described.

In the benefit part of the USs, there is a considerable count of cases where full redundancy prevails, especially where two clauses are inserted (24 clauses). The large count of full redundancies with two clauses indicates that benefits are often described in a standardised way in the different USs.

Figure 62 illustrates the aggregation of the count of redundancy clauses that occur in USs.

**Assessment of Result: Detailed Insights** In the dataset of Backlog G19, the clause “have alfred” was repeated in all USs, indicating that “alfred” is the end product and not a specific functionality. This suggests that the quality of the USs should be considered, so that they do not contain generic information that results in a lot of redundant information(false positives) being provided.

In the main parts of the USs, 1,663 clauses were redundant(“Main Part Redundancy Clauses” in Table 26), while only 188 redundancy clauses were found in the benefit parts(“Benefit Part Redundancy Clauses” in Table 26). This means that some USs are not often written in a standardised format for the description of core functions, resulting in a higher count of redundant clauses in the main part.

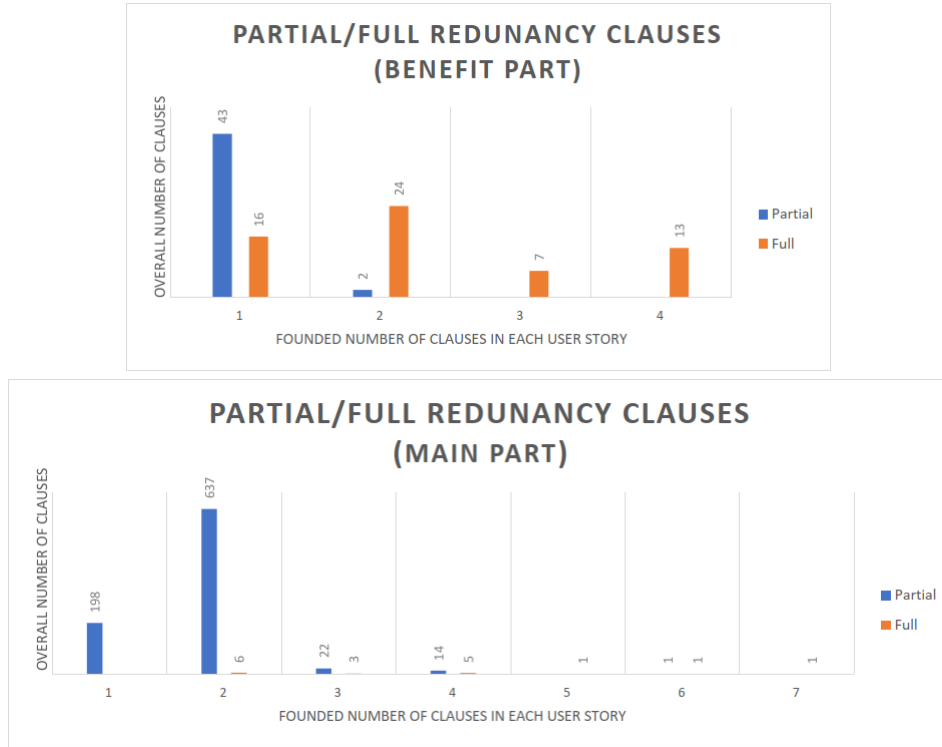


Figure 62: The aggregation between the count of redundancy clauses occurred in USs

**Example 5.18.** In the dataset of backlog G18 (274 clauses out of 283 in the main parts), for example, this is due to the clauses “have ability” in the main part, which are unnecessarily repeated in most USs:

*user\_story\_92: #g18# as a #researcher# I want to have #the #ability# to search files by file type and format.*

*user\_story\_80: #g18# as a #researcher# I want to have #the #ability# to attach standard metadata for behavioural observations (and video) so that my data can be searched and understood later.*

*Actually, the clause “have ability” in USs should be deleted and no redundancy should be possible at all:*

*user\_story\_92: #g18# as a researcher I want to search for files by file type and format.*

*user\_story\_80: #As a researcher, I want to attach standard metadata for behavioural observations (and videos), so that my data can be searched and understood later.*

There are also USs with the same functionality, but one provides more details about the functionality. In other words, one US is contained within another, and we refer to them as full redundant US-pairs, as deleting the US with less detail has no negative impact on the system. Sometimes it is necessary to merge these two USs to obtain a single detailed US.

**Example 5.19.** In the dataset of backlog G18, for example, we have two US-pairs



that are marked as full redundancy between *user\_story\_12* and *user\_story\_11* as well as *user\_story\_13* and *user\_story\_11*:

*user\_story\_12*: “#g18# as a #researcher#, I want to #upload# #files# prior to having them #attached# to a #log book page# using the web interface.”

*user\_story\_11*: “#g18# as a #researcher#, I want to #upload# #files# prior to having them #attached# to a #log book page#.”

*user\_story\_13*: “#g18# as a #researcher#, I want to #upload# #files# prior to having them #attached# to a #log book page# using a mapped network drive.”

As we can see, the *user\_story\_11* is an incomplete version of two other USs, and deleting it has no negative impact in the system, due to the fact that its goal is achieved and fulfilled by two other USs.

**Research question 1: Conclusion** After comparing the Ground Truth result with the result provided by our tool, the following realisation was made:

- Main Part Partial: A -5.6% (negative) percentage suggests that the Framework has fewer "Main Part Partial" counts than the Ground Truth. In this case, the Framework has about 5.6% fewer "Main Part Partial" counts than expected.
- Main Part Full: A high positive percentage of 326.67% indicates that the Framework has a significantly higher count of Main Part Full compared to Ground Truth. At 326.67%, the framework has more than three times as many main part full compared to the ground truth. In our investigation, we found that some phrases are not included as relationship (contains or targets) in the USs annotated with the Doccano tool. Therefore, our tool categorised some USs as fully redundant when in reality they were only partially redundant.
- Count of Benefit Partial: -26.19% a negative percentage here indicates that the Framework has fewer "Benefit Partial" counts compared to the Ground Truth. With -26.19%, the Framework has approximately one-quarter fewer "Benefit Partial" counts.
- Count of Benefit Full: 16.92% a positive percentage indicates that the Framework has more "Benefit Full" counts compared to the Ground Truth. With 16.92%, the Framework has almost 17% more "Benefit Full" counts than the Ground Truth.

It is also notable that if we add founded partial and full redundancies in main or benefit parts, we both amount are identical(main part: 890 cases , benefit part: 107).

This consistency indicates that the automated tool's results align with the ground truth, suggesting that the tool is reliable in detecting redundancy. It demonstrates that the tool's performance closely matches the personal assessment, reinforcing confidence in its accuracy and validity.

## Performance Evaluation

To answer the second research question "How does the tool's performance scale as the count of USs in a backlog increases?", we conducted a series of tests to measure the time it takes the tool to process different counts of USs. This section describes the testing methodology, the results obtained and the impact on the scalability of the tool.

**Test Methodology** To evaluate the tool's performance, we conducted a set of experiments in which the tool processed different numbers of USs in a backlog. The tests involved the following steps:

1. **Backlog Setup:** We used backlogs with varying numbers of USs around—50, 70, 90, 120 and 140—to simulate different workload sizes. Each backlog contained USs with varying content, redundancy elements, and complexity to represent a realistic range of cases. Table 27 shows information on the backlog data records provided for the performance test application.

US Information	Project Nr.	G04	G11	G10	G27	G19	Grand Total
	Number of US	51	73	97	114	137	472
	Number of Redundancy Clauses	6	20	30	22	925	1003

Table 27: Information on the backlog datasets provided for the application of the performance test

2. **Tool Execution:** Each part of toolchain(Rule creation, CDA tool, report creation and evaluation) was run for each backlog and the total time taken to process the entire backlog was recorded. The performance of the tool was measured by the processing time, i.e. the total time taken to process all USs in the backlog and identify redundancies.
3. **Repeating Tests:** To ensure reliability, each test was conducted multiple times, and the average processing time was calculated.

The test environment consisted of:

- Processor: Intel(R) Core(TM) i7-8565U CPU @ 1.80GHz (8 CPUs), 2.0GHz
- Memory: 8070MB RAM
- Display Devices: Intel(R) UHD Graphics 620, 4163 MB(Display Memory)
- Hard Disk: INTEL SSDPEKNW512G8H
- Operating System: Windows 11 Home 64-bit (10.0, Build 22631) (22621.ni\_release.220506-1250)
- System Type: 64-bit operating system, x64-based processor

Table 28 shows the result of tool's performance in seconds which were conducted on a controlled environment to ensure consistency.

<b>Test Result</b>	Project Nr.	G04	G11	G10	G27	G19	<b>Grand Total</b>
	Rule Creation	1,32	1,49	1,53	1,63	1,67	<b>7,64</b>
	CDA Tool	13,35	55,9	63,41	80,93	1221,49	<b>1435,08</b>
	Report Creation & Evaluation	3,69	17,46	17,86	33,91	2205,9	<b>2278,82</b>
	<b>Grand Total</b>	<b>18,36</b>	<b>74,85</b>	<b>82,8</b>	<b>116,5</b>	<b>3429,06</b>	<b>3721,54</b>

Table 28: Information about the result of the tool’s performance test, which was measured using the processing time in seconds.

**Research question 2: Conclusion** As we can see, there is a direct correlation between the number of USs in a backlog and the time our tool needs to process them. The results confirm that developers and project managers should expect a longer processing time when evaluating redundancy as the backlog grows.

However, the impact on processing time varies depending on the process in question. While rule creation using the Henshin API shows relatively consistent and lower processing times, other components such as the CDA tool and report creation processes show an exponential increase in processing time as the number of USs increases. This indicates that certain processes scale differently as the data load increases.

An important observation is that with a larger number of USs, the probability of finding redundant clauses between USs increases. This has a significant impact on redundancy detection and backlog management. As the data set grows, there are more opportunities for overlaps, repetitions or similar USs that could indicate redundancy.

### Threats to Validity

When assessing the redundancy of USs through both personal assessment (ground truth) and the automated tool, several potential threats to validity must be considered. This section outlines the main threats to validity and describes how they were mitigated during the study.

**Construct validity** It refers to the extent to which the assessment measures what it is intended to measure. The following risks were identified:

- Ambiguity of criteria: If the criteria for redundancy are unclear or open to interpretation, this can lead to inconsistent scores. To avoid this, we defined clear and detailed criteria for identifying redundancy in USs.
- Subjectivity in ground truth: As ground truth is based on personal judgement, subjectivity could lead to bias. To minimise this risk, we cross-checked out evaluations with another experienced evaluator.

**External validity** External validity refers to the generalisability of the study results to other contexts or population groups. Threats to external validity include:

- specificity of USs: If the USs used in the study are too specific or context-dependent, the results may not be transferable to other projects. To mitigate this, we included 19 backlog datasets with different USs and different project types in the analysis.
- Tool Limitation: The automated tool is designed for a specific format of USs, which limits its broader applicability. Our tool depends heavily on the specific US's format (e.g. "As a <user>, I want to ..., so that..."), which is essential for the application of the tool. Therefore, we tested the tool in isolated contexts limited to well-formed USs and analysed its performance in a number of scenarios.

Another limitation is that our tool is dependent on the specific type of annotation used for USs. In our case, these are annotations such as action, entity, their reference targets, triggers and contains. This means that the effectiveness of the tool depends on the accuracy and consistency of these annotations. If the annotations are incomplete or incorrect, the tool may not work as expected. In addition, the tool may not be compatible with other annotation schemes that do not use these specific labels.

**Internal Validity** Internal validity is concerned with whether the observed results are attributable to the factors analysed or are influenced by other variables. Potential threats to internal validity include:

- Confounding factors: External influences or unintended variables could influence the assessment of redundancy. In particular, USs annotated with Doccano are a very critical impact when evaluating full and partial redundancies between USs using tool. The more phrases are covered in the relationship(targets, contains), the better the score. Since our tool uses Doccano annotated USs as primary input without any changes, these discrepancies are unavoidable.
- Limitation of tool: The automated tool may not capture all aspects of redundancy, especially semantically. This leads us to the next step, the semantic analysis of USs.

## 5.6 Conclusion

In this study, we developed and applied a comprehensive approach that combines the Doccano tool, Henshin and the CDA tool to systematically identify and report redundancies in USs within software development projects with an evaluation.

By carefully analysing 19 different backlog datasets, our method not only separated USs into main and benefit parts for nuanced examination, but also facilitated the distinction between full and partial redundancies within these parts.

Our results reveal a crucial finding: the effectiveness of redundancy detection is significantly influenced by the quality of the USs as well as annotated USs. Well-formulated USs that do not contain unnecessary clauses (e.g. the repetition of "end product" in

all USs) and a concisely annotated backlog specially in relation properties also have a major influence on the effective redundancy analysis process.

If the main part is evaluated to be full redundant, then we have a US-pair that is functionally identical and we can merge the US-pair into one US. In the case of full redundancy in the benefit part, this means that the US-pairs belong to the same goal and objective, to which they should be categorised for better accessibility and understanding.

A notable trend emerged from our analysis: the benefit parts are more often fully redundant than the main parts of USs. This indicates that multiple USs often strive for different functions that contribute to a common system aspect or goal.

Recognising such redundancies not only helps to consolidate functionally identical US-pairs into single, more compact USs, but also to group US-pairs together, improving accessibility and understanding of project backlogs.

In summary, our study confirms the central role of a syntactic analysis approach in detecting and managing redundancies in project backlogs, thereby contributing to the rationalisation of software development processes.

While the quality of annotated USs plays a critical role in the success of this approach, the insights gained from this research provide valuable guidance for both current practices and future research in software project management.

However, our investigation has also shown that we can only consider USs with syntactic redundancy. If they are indeed US-pairs with the same functionality but using different words and clauses to achieve the same goal, we cannot detect this with this approach.

This finding shows that the distinction between actual redundancy and mere superficial similarity can be further refined, which leads us to analyse the USs semantically.

In the next section, we therefore present a method for analysing conflicts and dependencies between USs in semantic way.

## References

- [1] A. Al-Hroob, A. T. Imam, and R. Al-Heisa. [The use of artificial neural networks for extracting actions and actors from requirements document](#). *Information and Software Technology*, 101:1–15, 2018.
- [2] T. Arendt, E. Biermann, S. Jurack, C. Krause, and G. Taentzer. [Henshin: advanced concepts and tools for in-place EMF model transformations](#). In *Model Driven Engineering Languages and Systems: 13th International Conference, MODELS 2010, Oslo, Norway, October 3-8, 2010, Proceedings, Part I 13*, pages 121–135. Springer, 2010.
- [3] M. Arias, A. Buccella, and A. Cechich. [A Framework for Managing Requirements of Software Product Lines](#). *Electronic Notes in Theoretical Computer Science*, 339:5–20, July 2018. ZSCC: 0000025.
- [4] S. Arulmohan, M.-J. Meurs, and S. Mosser. [Extracting Domain Models from Textual Requirements in the Era of Large Language Models](#). MDEIntelligence (co-located with ACM/IEEE 26th International Conference on . . . , 2023.
- [5] C. F. Baker, C. J. Fillmore, and J. B. Lowe. [The berkeley framenet project](#). In *COLING 1998 Volume 1: The 17th International Conference on Computational Linguistics*, 1998.
- [6] D. M. Berry and E. Kamsties. Ambiguity in requirements specification. In *Perspectives on software requirements*, pages 7–44. Springer.
- [7] K. Born, T. Arendt, F. Heß, and G. Taentzer. [Analyzing conflicts and dependencies of rule-based transformations in Henshin](#). In *Fundamental Approaches to Software Engineering: 18th International Conference, FASE 2015, Held as Part of the European Joint Conferences on Theory and Practice of Software, ETAPS 2015, London, UK, April 11-18, 2015, Proceedings 18*, pages 165–168. Springer, 2015.
- [8] E. Cambria and B. White. [Jumping NLP curves: A review of natural language processing research](#). *IEEE Computational intelligence magazine*, 9(2):48–57, 2014.
- [9] P. Carlshamre, K. Sandahl, M. Lindvall, B. Regnell, and J. N. och Dag. An industrial survey of requirements interdependencies in software product release planning. In *Proceedings Fifth IEEE International Symposium on Requirements Engineering*, pages 84–91. IEEE, 2001.
- [10] F. Dalpiaz. [Requirements Data Sets \(User Stories\)](#), 2018.07.28.
- [11] F. Dalpiaz, A. Ferrari, X. Franch, and C. Palomares. [Natural Language Processing for Requirements Engineering: The Best Is Yet to Come](#). 35:115–119, 2018.

- [12] A. Gomez, G. Rueda, and P. P. Alarcón. A systematic and lightweight method to identify dependencies between user stories. In *Agile Processes in Software Engineering and Extreme Programming: 11th International Conference, XP 2010, Trondheim, Norway, June 1-4, 2010. Proceedings 11*, pages 190–195. Springer, 2010.
- [13] D. Greer and G. Ruhe. [Software release planning: an evolutionary and iterative approach](#). 46:243–253, 2004.
- [14] A. Habel and K.-H. Pennemann. [Correctness of high-level transformation systems relative to nested conditions](#). *Mathematical Structures in Computer Science*, 19(2):245–296, 2009.
- [15] A. C. D. H. J. Hartmanis, T. Henzinger, J. H. N. J. T. Leighton, and M. Nivat. [Monographs in Theoretical Computer Science An EATCS Series](#). 2006.
- [16] J. H. Hausmann, R. Heckel, and G. Taentzer. [Detection of conflicting functional requirements in a use case-driven approach: a static analysis technique based on graph transformation](#). In *Proceedings of the 24th international conference on software engineering*, pages 105–115, 2002.
- [17] P. Heck and A. Zaidman. [A quality framework for agile requirements: a practitioner’s perspective](#). *arXiv preprint arXiv:1406.4692*, 2014.
- [18] H. Kastenberg and A. Rensink. [Model checking dynamic states in GROOVE](#). In *Model Checking Software: 13th International SPIN Workshop, Vienna, Austria, March 30-April 1, 2006. Proceedings 13*, pages 299–305. Springer, 2006.
- [19] K. Kipper, A. Korhonen, N. Ryant, and M. Palmer. [Extending VerbNet with Novel Verb Classes](#). In *LREC*, pages 1027–1032, 2006.
- [20] A. Korhonen and T. Briscoe. [Extended lexical-semantic classification of English verbs](#). In *Proceedings of the Computational Lexical Semantics Workshop at HLT-NAACL 2004*, pages 38–45, 2004.
- [21] J. D. Lafferty, A. McCallum, and F. C. N. Pereira. [Conditional Random Fields: Probabilistic Models for Segmenting and Labeling Sequence Data](#). In C. E. Brodley and A. P. Danyluk, editors, *Proceedings of the Eighteenth International Conference on Machine Learning (ICML 2001), Williams College, Williamstown, MA, USA, June 28 - July 1, 2001*, pages 282–289. Morgan Kaufmann, 2001.
- [22] B. Levin. *English verb classes and alternations: A preliminary investigation*. University of Chicago press, 1993.
- [23] O. I. Lindland, G. Sindre, and A. Solvberg. [Understanding quality in conceptual modeling](#). *IEEE software*, 11(2):42–49, 1994.

- [24] O. Liskin, R. Pham, S. Kiesling, and K. Schneider. [Why we need a granularity concept for user stories](#). In *Agile Processes in Software Engineering and Extreme Programming: 15th International Conference, XP 2014, Rome, Italy, May 26-30, 2014. Proceedings 15*, pages 110–125. Springer, 2014.
- [25] K. Logue and K. McDavid. [Handling uncertainty in agile requirement prioritization and scheduling using statistical simulation](#). In *Agile 2008 Conference*, pages 73–82. IEEE, 2008.
- [26] G. Lucassen, F. Dalpiaz, J. M. E. van der Werf, and S. Brinkkemper. [Improving agile requirements: the quality user story framework and tool](#). *Requirements engineering*, 21:383–403, 2016.
- [27] T. Mens, G. Taentzer, and O. Runge. [Analysing refactoring dependencies using graph transformation](#). *Software & Systems Modeling*, 6:269–285, 2007.
- [28] G. A. Miller. [WordNet: a lexical database for English](#). *Communications of the ACM*, 38(11):39–41, 1995.
- [29] M. Moens, M. Steedman, et al. [Temporal ontology and temporal reference.](#), 2005.
- [30] S. Mosser, C. Pulgar, and V. Reinharz. [Modelling Agile Backlogs as Composable Artifacts to support Developers and Product Owners](#). *Journal of Object Technology (JOT)*, 2022.
- [31] E. Paja, F. Dalpiaz, and P. Giorgini. [Managing security requirements conflicts in socio-technical systems](#). In *Conceptual Modeling: 32th International Conference, ER 2013, Hong-Kong, China, November 11-13, 2013. Proceedings 32*, pages 270–283. Springer, 2013.
- [32] C. A. Prolo. [Generating the XTAG English grammar using metarules](#). In *COLING 2002: The 19th International Conference on Computational Linguistics*, 2002.
- [33] I. K. Raharjana, D. Siahaan, and C. Fatichah. [User stories and natural language processing: A systematic literature review](#). *IEEE access*, 9:53811–53826, 2021.
- [34] W. N. Robinson. [Integrating multiple specifications using domain goals](#). *ACM SIGSOFT Software Engineering Notes*, 14(3):219–226, 1989.
- [35] T. Sedano, P. Ralph, and C. Péraire. [The product backlog](#). In *2019 IEEE/ACM 41st International Conference on Software Engineering (ICSE)*, pages 200–211. IEEE, 2019.
- [36] D. Strueber. [Henshin/Conflict and Dependency Analysis](#), 2023.02.11.
- [37] M. Tichy, C. Krause, and G. Liebel. [Detecting performance bad smells for henshin model transformations](#). *Amt@ models*, 1077, 2013.



- [38] G. Varró, F. Deckwerth, M. Wieber, and A. Schürr. [An algorithm for generating model-sensitive search plans for EMF models](#). In *Theory and Practice of Model Transformations: 5th International Conference, ICMT 2012, Prague, Czech Republic, May 28-29, 2012. Proceedings 5*, pages 224–239. Springer, 2012.
- [39] Y. Wautelet, S. Heng, S. Kiv, and M. Kolp. [User-story driven development of multi-agent systems: A process fragment for agile methods](#). 2017.
- [40] Y. Wautelet, S. Heng, M. Kolp, and I. Mirbel. [Unifying and extending user story models](#). In *Advanced Information Systems Engineering: 26th International Conference, CAiSE 2014, Thessaloniki, Greece, June 16-20, 2014. Proceedings 26*, pages 211–225. Springer, 2014.
- [41] M. Wynne, A. Hellesoy, and S. Tooke. *The cucumber book: behaviour-driven development for testers and developers*. Pragmatic Bookshelf, 2017.