


ACL CONFIGURATION

Creation of Access Control Lists (Read ACL)

1. In the Application Navigator, search for System Security → Access Control (ACL).
2. Elevate “Security_admin” role
3. Click New to create a new ACL.
4. Enter the following details:
 - Type: record
 - Operation: read
 - Name: u_institution_details
 - Active: true
 - Advanced: true
5. In the Requires role related list, add:
 - bb1 (custom role)
6. Add Data condition as Branch is EEE
7. In the Script field, add the following script:

```
(function () {  
    // Allow admin users full access  
    if (gs.hasRole('admin')) {  
        return true;  
    }  
  
    // Allow only EEE branch users to see EEE records  
    if (gs.hasRole('bb1')){  
        return true;  
    }  
  
    // Deny access for all others  
    return false;  
})();
```

8. Click Submit to save the ACL.

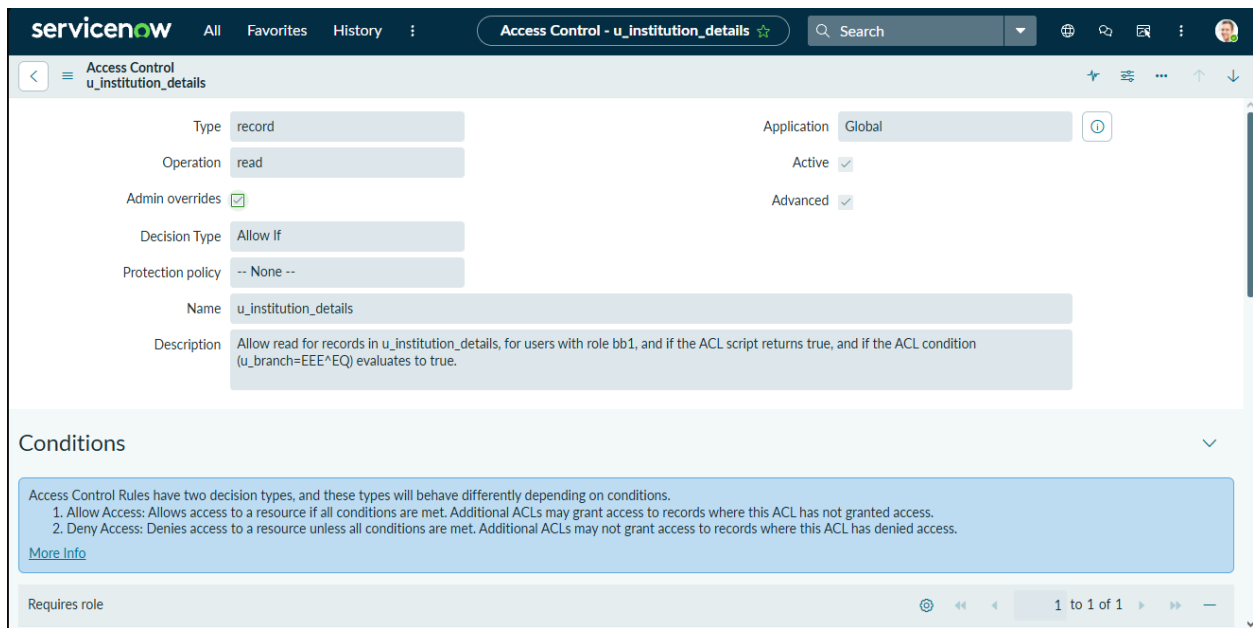

The screenshot shows the ServiceNow interface for configuring an Access Control Rule (ACL) for the resource 'u_institution_details'. The top navigation bar includes 'All', 'Favorites', 'History', and a search bar. The breadcrumb trail is 'Access Control - u_institution_details'. The main form contains the following fields:

- Type: record
- Operation: read
- Admin overrides: ☒
- Decision Type: Allow If
- Protection policy: -- None --
- Name: u_institution_details
- Description: Allow read for records in u_institution_details, for users with role bb1, and if the ACL script returns true, and if the ACL condition (u_branch=EEE^EQ) evaluates to true.
- Application: Global
- Active: ☒
- Advanced: ☒

Below the form is a 'Conditions' section with a blue box containing the following text:

Access Control Rules have two decision types, and these types will behave differently depending on conditions.

1. Allow Access: Allows access to a resource if all conditions are met. Additional ACLs may grant access to records where this ACL has not granted access.
2. Deny Access: Denies access to a resource unless all conditions are met. Additional ACLs may not grant access to records where this ACL has denied access.

A link for 'More Info' is provided below the text.

At the bottom, there is a 'Requires role' field and a pagination bar showing '1 to 1 of 1'.

Screenshot – ACL Configuration

9. Impersonate EEE users and open the Student Records list.
10. Copy the table name u_institution_details.list/LIST and paste in the All menu.
11. Impersonate Admin and open the Student Records list.

Verify :

- User with bb1 role can view only EEE branch records
- User without the role cannot view any records
- Admin user can view all records regardless of branch