B2B eCommerce MarketPlace system

General Information

Settings & installation guide

Files Location

Operate & Manauals

General Information

B2B eCommerce MarketPlace System

This is the **B2B eCommerce MarketPlace system** for small ,medium & large company(Extended Version). In this **B2B eCommerce MarketPlace system** You will have the products information with selling price, In Admin there are all kinds of data including products,slides,featured products,CMS and others Features. in Member Area there are login register and buy products and can see the status of their orders,delivery,cancellation,completion of their Orders.

Dashboard:

After login You can see Dashboard with the current status of products, orders, users

Products:

You will have your products with category . The Products will have the buying price & selling price

Orders:

At the Orders You will manage delivery status

Theme:

At the theme You can add your own theme


Material Used:

HTML,CSS,JS PHP 5.6+ Codelgniter 3.1.11 Framewok MYSQL 5.6+

Settings & installation guide

MYSQL:

Database:

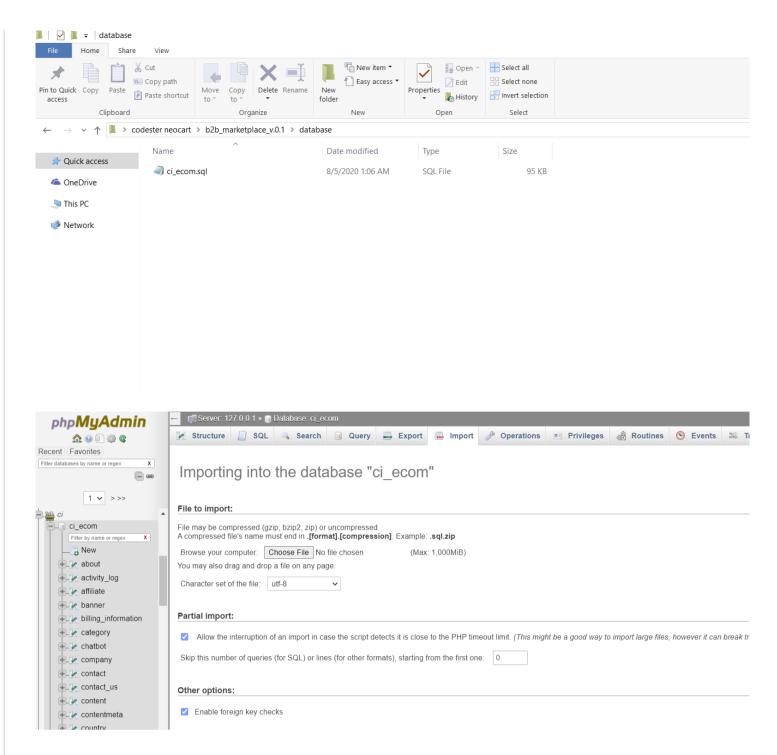

The database and its tables is in zip folder. In PhpMyAdmin make a database name and click import. now browse and select *.sql file from unzipped folder and after submitting You can see all the tables there.

PHP:

config.php:

```
| Control of the cont
```

Path: application/config/config.php

Enter your domain name here example: http://www.example.com

database.php:

```
d_neocart

d_lead settings
delta set
                                                                                                                                                                                              73 $active_group = 'default';
74 $query_builder = TRUE;
                                                                                                                                                                                            ,
'localhost',
                                                                                                                                                                                                                                                 'hostname' =
                                                                                                                                                                                                                                                     'username'
                                                                                                                                                                                                                                                                                                                                                 'root',
                                                                                                                                                                                                                                                  'database'
                                                                                                                                                                                                                                                                                                                                               'ci_ecom'
                                                                                                                                                                                                                                                    'dbdriver'
                                                                                                                                                                                                                                                                                                                                                  'mysqli',
                                                                                                                                                                                                                                                    'dbprefix'
                                                                                                                                                                                                                                                                                                                                               FALSE,
                                                                                                                                                                                                                                                     'pconnect'
                                                                                                                                                                                                                                                                                                                                                 TRUE, //(ENVIRONMENT !== 'production'),
                                                                                                                                                                                              86
87
                                                                                                                                                                                                                                                                                                                                               FALSE,
                                                                                                                                                                                                                                                    'cache on'
                                                                                                                                                                                                                                                        'cachedir'
                                                                                                                                                                                                                                                                                                                                                 'utf8',
                                                                                                                                                                                                                                                     'char_set'
                                                                                                                                                                                                                                                                                                                                               'utf8_general_ci',
                                                                                                                                                                                              89
                                                                                                                                                                                                                                                      'dbcollat'
                                                                                                                                                                                                                                                        'swap_pre'
                                                                                                                                                                                                                                                      'encrypt' =
                                                                                                                                                                                                                                                                                                                                           FALSE,
                                                                                                                                                                                                                                                        'compress'
```

Path: application/config/database.php

Enter your database name, username & password

paypal_pro.lib.php:

```
### 44 ### 45 function PPHttpPost($methodName_, $nvpStr_)
                                                        $environment = 'sandbox'; // or 'beta-sandbox' or 'live'
                                                        // Set up your API credentials, PayPal end point, and API version.
                                                        $API_Password = urlencode('QFZCWN5HZM8VBG7Q');
                                                        $API_Signature = urlencode('A.d9eRKfd1yVkRrtmMfCFLTqa6M9AyodL0SJkhYztxUi8W9pCXF6.4NI');
      template_ord
chatbot
contact_us
delvery_information
extentions
Home
member
                                                         $API_Endpoint = "https://api-3t.paypal.com/nvp";
if ("sandbox" === $environment || "beta-sandbox"
                                                        if ("sandbox" === $
                                                              $API_Endpoint = "https://api-3t.$environment.paypal.com/nvp";
      member
pages
privacy_polcy
product
search
subscription
terms_condition
                                                        $version = urlencode('51.0');
                                                       // Set the curl parameters.
                                                       $ch = curl_init();
curl_setopt($ch, CURLOPT_URL, $API_Endpoint);
curl_setopt($ch, CURLOPT_VERBOSE, 1);
   index.htm
index.htm
index.htm
index.htm
index.htm
index.htm
index.htm
index.htm
                                                       // Turn off the server and peer verification (TrustManager Concept).
curl_setopt($ch, CURLOPT_SSL_VERIFYPEER, FALSE);
curl_setopt($ch, CURLOPT_SSL_VERIFYHOST, FALSE);
index.html
contents
themes
neocart
public
system
buldpath
ditorconfig
aitianore
                                         69
70
                                                        curl_setopt($ch, CURLOPT_RETURNTRANSFER, 1);
                                                        curl_setopt($ch, CURLOPT_POST, 1);
```

Path : application/modules/cart/views/paypal_pro.lib.php

Enter your live, code, username & password

Files location

Modules-Controller, Model, Views:

```
### settings application

| Composition of the controllers of the controller of the controllers of the controller of the controllers of the controller o
```

Controller:

Path: application/modules/controller

All the business logic is here and included the model and views

Model:

Path: application/modules/model Database Model to retive data

Views:

Path: application/modules/views HTML and Tables to display data


libraris:



Path :application/libraris

Your custom libraris and load in Controller

third_party:

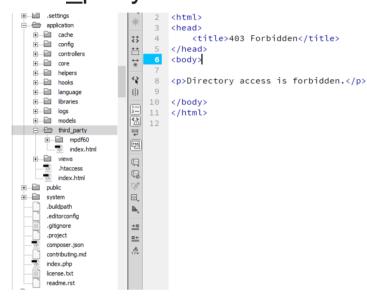

Path: application/third_party

Keep all your third party property like pdf, excell etc.

public:




Path:public

Keep all your public property like js,css and images


Operate & Manauals

Login:

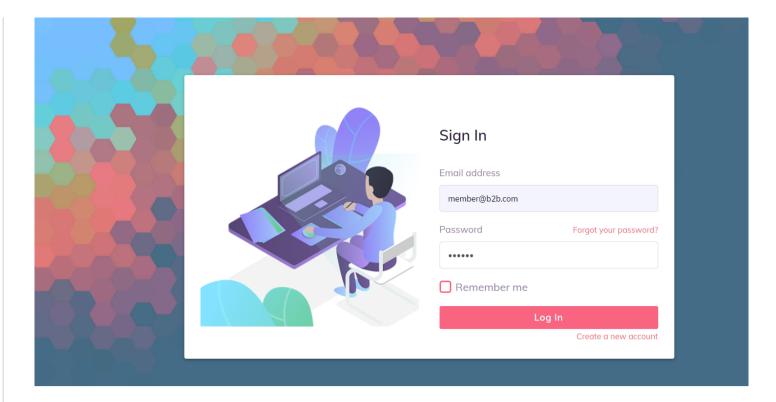


Login with your username(email) & password stored in users tables

Dashboard:

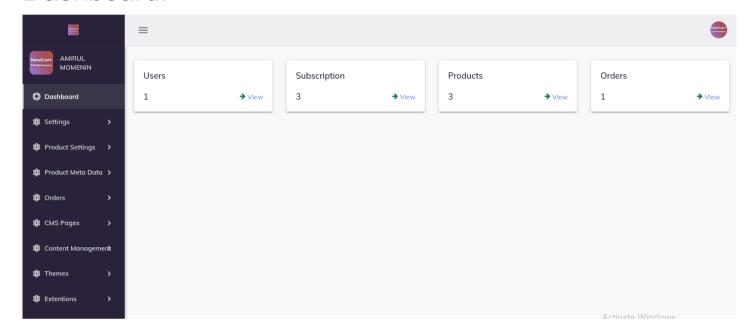


In the Dashboard you can see users,products,orders

Profile:

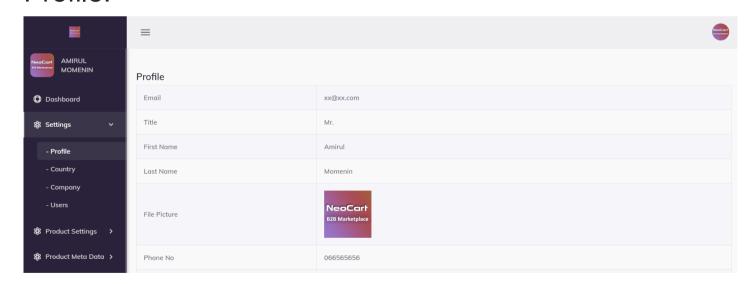


Enter the profile information with name, email, contact, picture and address information

Products:

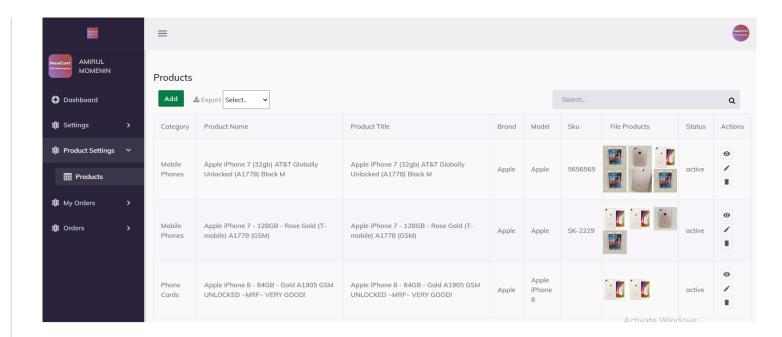

Enter the Products information with name, title, description, sale price, tax, vat, discount

Orders:

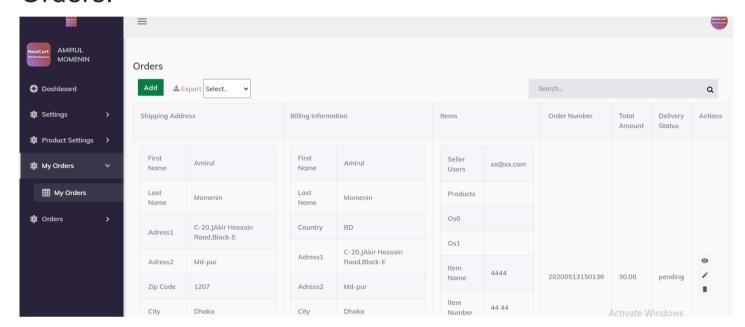

Manage your Orders with status