

1. Producer

Key Parameters
- Message
- Key
- Partition
- Timestamp (if your broker was using MSK)
2. Partition

Key Parameters
- Partition
- Key
- Message
- Timestamp (if your broker was using MSK)
3. Fetching

Key Parameters
- Partition
- Key
- Message
- Timestamp (if your broker was using MSK)
4. Fetching

Key Parameters
- Partition
- Key
- Message
- Timestamp (if your broker was using MSK)
5. Fetching

Key Parameters
- Partition
- Key
- Message
- Timestamp (if your broker was using MSK)
6. Fetching

Key Parameters
- Partition
- Key
- Message
- Timestamp (if your broker was using MSK)

1. Fetching

Key Parameters
- Partition
- Key
- Message
- Timestamp (if your broker was using MSK)

2. Fetching

Key Parameters
- Partition
- Key
- Message
- Timestamp (if your broker was using MSK)

3. Fetching

Key Parameters
- Partition
- Key
- Message
- Timestamp (if your broker was using MSK)

4. Fetching


Key Parameters
- Partition
- Key
- Message
- Timestamp (if your broker was using MSK)

5. Fetching

Key Parameters
- Partition
- Key
- Message
- Timestamp (if your broker was using MSK)

6. Fetching

Key Parameters
- Partition
- Key
- Message
- Timestamp (if your broker was using MSK)

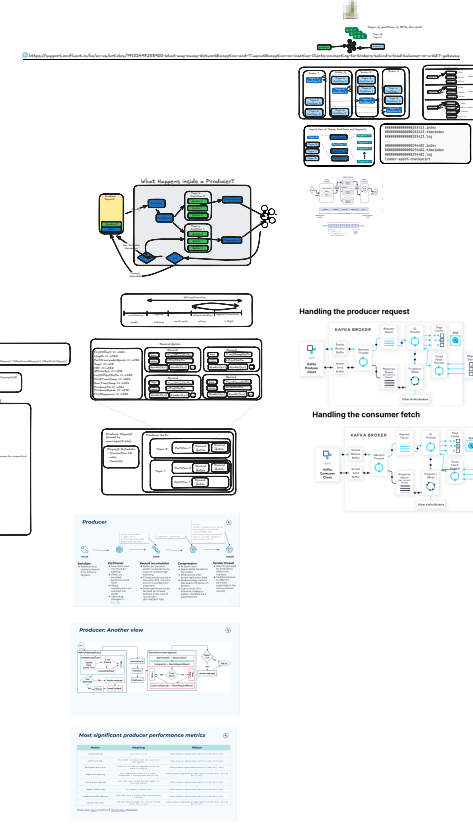

Key parameters in each partition

Consumer Partition assignment strategies

Consumer Log

Selected consumer performance metrics

Monitoring Requests on the Broker

Anatomy of a Produce Request on a Broker

Anatomy of a Fetch Request on a Broker

MP to MP v1
MP to MP v1
MP to MP v1
MP to MP v1