


Themes, Preferences and Keyboard Shortcuts



John Papa

@john_papa | www.johnpapa.net

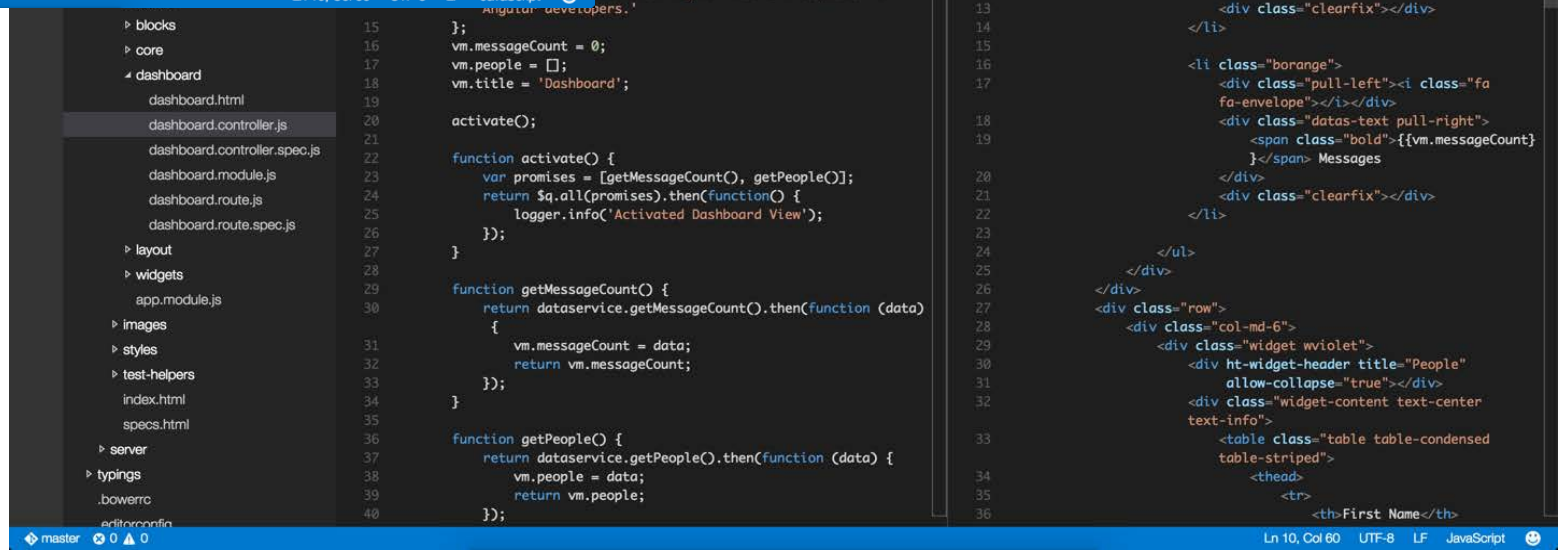

Code Preferences

Default

Come with Code

User

All instances of Code

Workspace

The current project/workspace

Workspace



Creates `settings.json` file

Stored in your workspace in `.settings` folder

Overrides the user preferences

Keybindings

Default and Custom Bindings

7 Valuable Default Keyboard Shortcuts

⇧⌘F

Format Code

⌘F12

Peek

⇧F12

Show all References

F12

Go to Definition

⌘P

Go to File

⌘1

Focus 1st Pane (or 2nd or 3rd)

^⌘F

Full Screen

Defining Keybindings

Rules

- Key – the pressed key(s)
- When – evaluated expression describing the context of when to execute the command
- Command – the command to execute

```
{ "key": "ctrl+shift+l",  
  "command": "workbench.action.changeToLightTheme" }
```

```
{ "key": "f5",  
  "command": "workbench.action.debug.play",  
  "when": "inDebugMode" }
```

Accepted Modifiers for Keybindings

OSX

ctrl+, shift+, alt+, cmd+

Windows

ctrl+, shift+, alt+, win+

Linux

ctrl+, shift+, alt+, meta+

Customization



Themes

Customize your preferences

Store project specific preferences

Explore keybindings

Create custom keybindings