



# How Server Data Reaches Splunk Observability Cloud

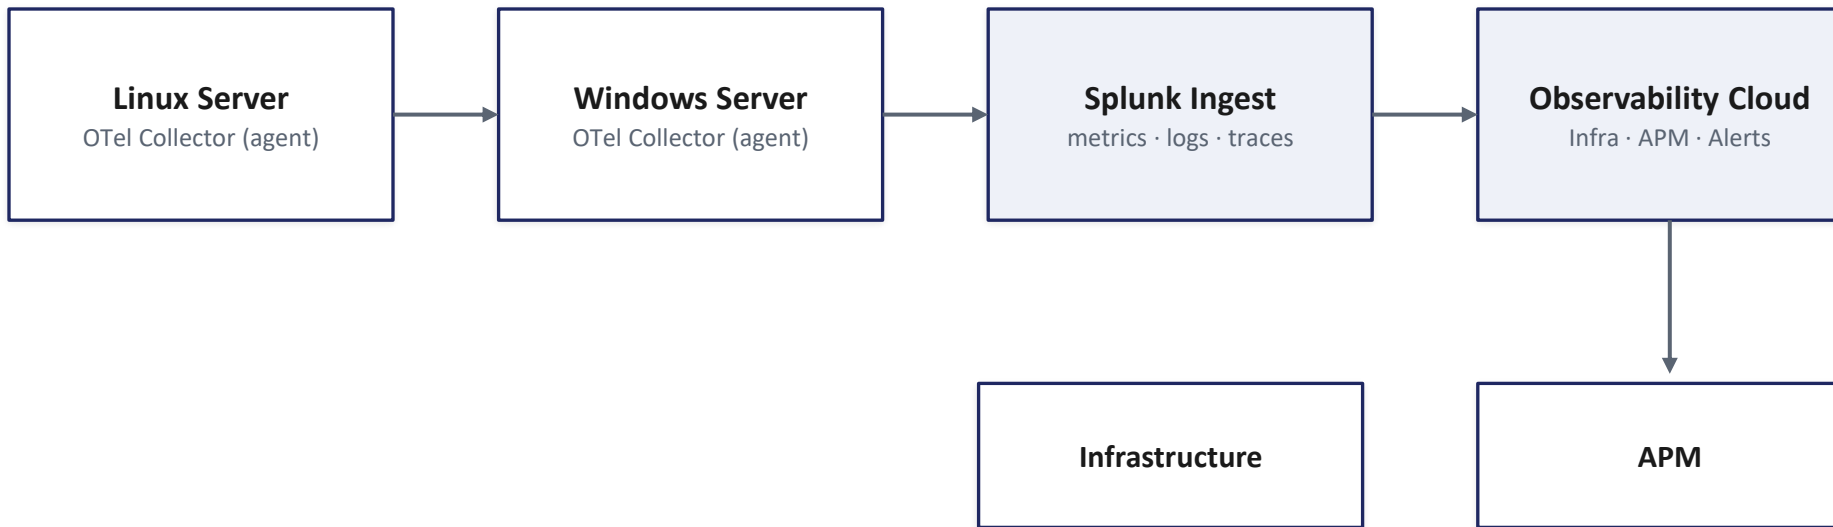


*One OTel Collector runs on each host and streams data through a single ingest pipeline into Splunk Observability Cloud.*

# OTel Collector Install & Configuration Flow

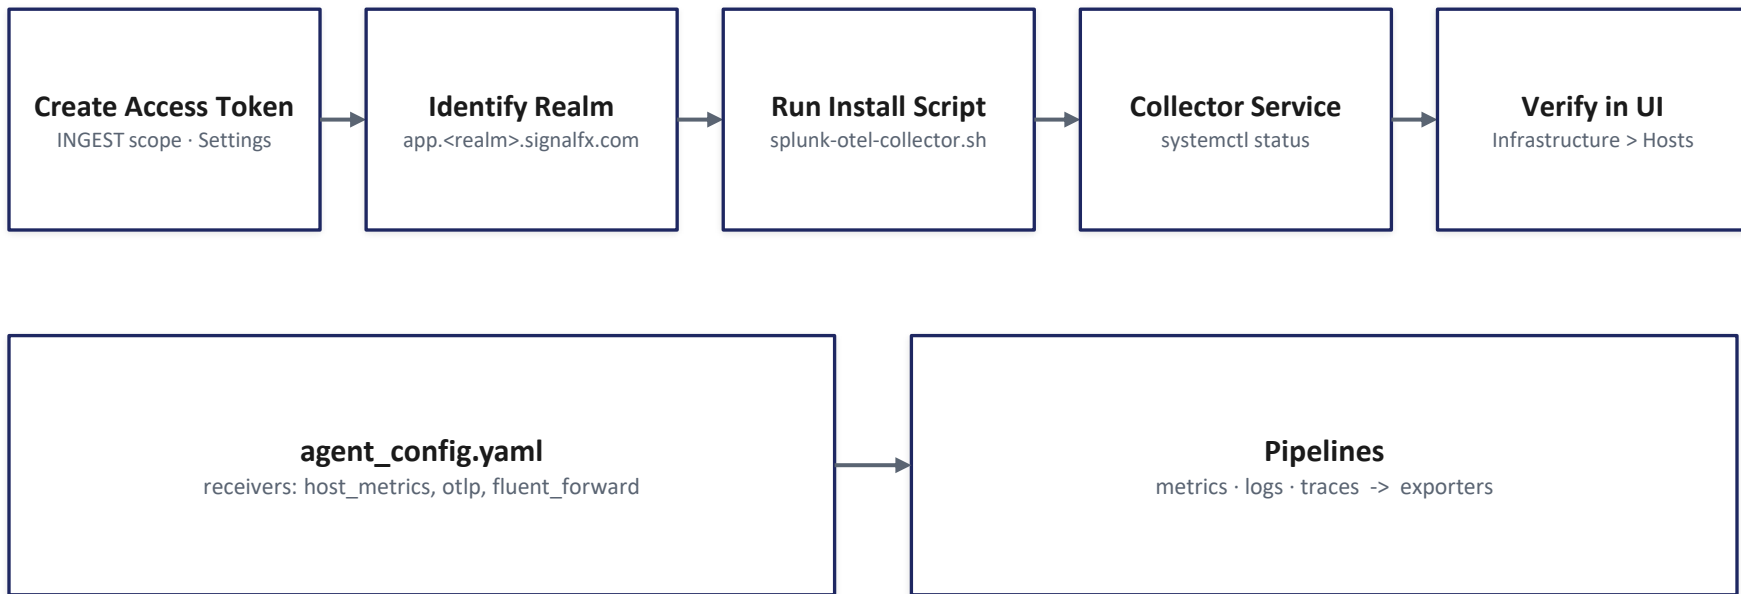

*Default config already enables host metrics; log and trace collection are turned on by editing the same file.*

# OTel Collector Install & Configuration Flow

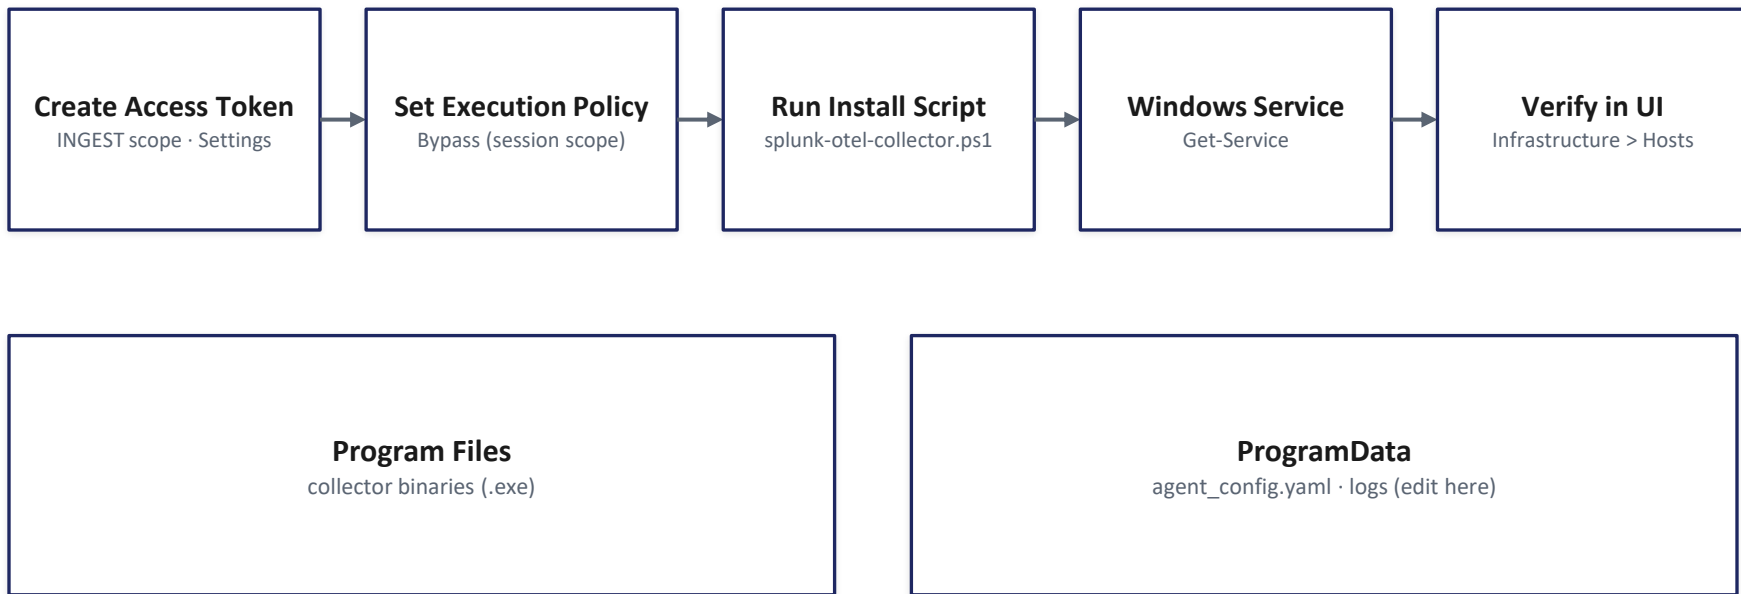

*Binaries and editable configuration live in separate directories — always edit the copy under ProgramData.*

# Receivers, Processors, and Exporters



*Every pipeline (metrics, logs, traces) follows this same three-stage shape inside agent\_config.yaml.*



## VALIDATION

# Confirming Data in SREability Cloud

Collector Sends Data



### Infrastructure

Hosts · CPU/mem/disk

### APM

Service map · traces

### Logs

Application · system

### Alerts

Detectors · notifications

### Host Tagging

environment:lab -> filter & scope dashboards

### Troubleshooting

journalctl / Event Log -> validate config -> restart

*A healthy setup shows the host under Infrastructure within minutes, with logs, traces, and alerts following the same path.*