

Domain Name Changed & Https Configuration On Linux Server

Step 1: Configure amit.pachpute.in

Check On Terminal


hostname -I

192.168.0.104 This is Domain Name IP {DNS IP LAN WIFI NETWORK }

192.168.0.104 amit.pachpute.in

Open:


sudo nano /etc/hosts

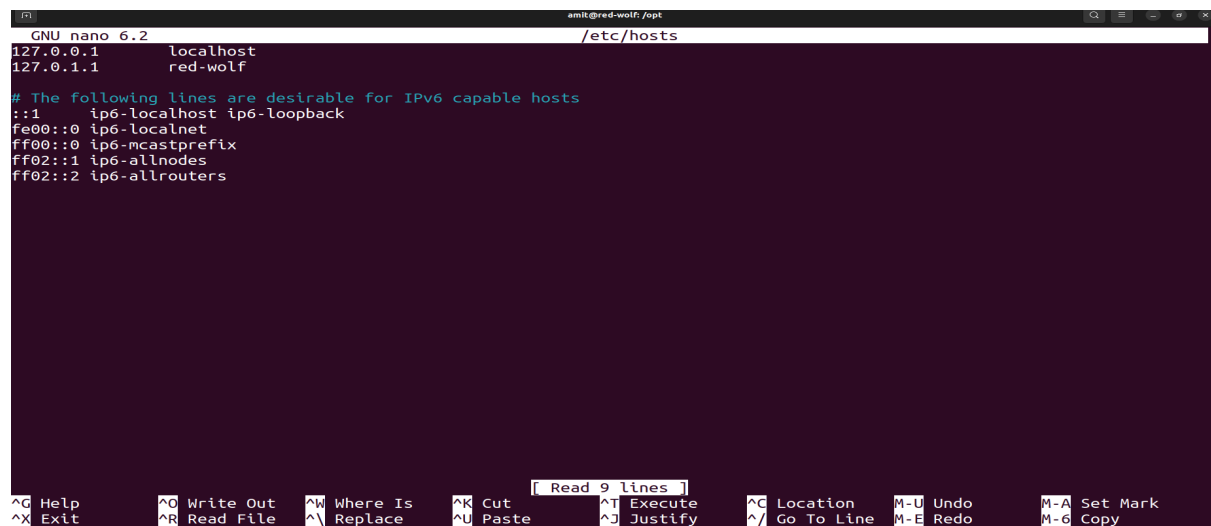

```
GNU nano 6.2 /etc/hosts
127.0.0.1 localhost
127.0.1.1 red-wolf

# The following lines are desirable for IPv6 capable hosts
::1 ip6-localhost ip6-loopback
fe00::0 ip6-localnet
ff00::0 ip6-mcastprefix
ff02::1 ip6-allnodes
ff02::2 ip6-allrouters
```

Add 192.168.0.104 amit.pachpute.in

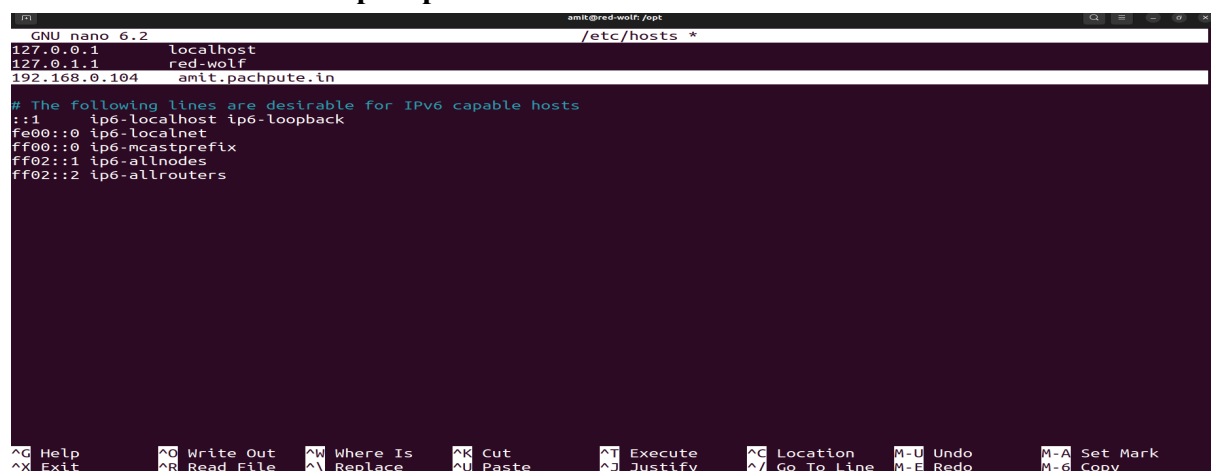

```
GNU nano 6.2 /etc/hosts *
127.0.0.1 localhost
127.0.1.1 red-wolf
192.168.0.104 amit.pachpute.in

# The following lines are desirable for IPv6 capable hosts
::1 ip6-localhost ip6-loopback
fe00::0 ip6-localnet
ff00::0 ip6-mcastprefix
ff02::1 ip6-allnodes
ff02::2 ip6-allrouters
```

Ctrl + X then Y then Enter

STEP 2 — Verify Domain Resolution

Run:

getent hosts amit.pachpute.in

Expected:

```
amit@red-wolf:/opt$ getent hosts amit.pachpute.in
192.168.0.104    amit.pachpute.in
amit@red-wolf:/opt$
```

192.168.0.104 amit.pachpute.in

Then:

ping -c 3 amit.pachpute.in

Expected:

```
amit@red-wolf:/opt$ ping -c 3 amit.pachpute.in
PING amit.pachpute.in (192.168.0.104) 56(84) bytes of data.
64 bytes from amit.pachpute.in (192.168.0.104): icmp_seq=1 ttl=64 time=0.064 ms
64 bytes from amit.pachpute.in (192.168.0.104): icmp_seq=2 ttl=64 time=0.056 ms
64 bytes from amit.pachpute.in (192.168.0.104): icmp_seq=3 ttl=64 time=0.051 ms

--- amit.pachpute.in ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2031ms
rtt min/avg/max/mdev = 0.051/0.057/0.064/0.005 ms
amit@red-wolf:/opt$
```

PING amit.pachpute.in (192.168.0.104)

64 bytes from 192.168.0.104

If this works, your hostname is correctly mapped.

STEP 3 — Create Separate Certificate Directory

sudo mkdir -p /opt/certificates

```
amit@red-wolf:/opt$ sudo mkdir certificates
```

sudo chmod 700 /opt/certificates

```
amit@red-wolf:/opt$ sudo chmod 700 /opt/certificates
amit@red-wolf:/opt$ ll
total 40
drwxr-xr-x 10 root root 4096 Sep 27 09:27 ./
drwxr-xr-x 20 root root 4096 Oct  6 2024 ../
drwxrwxr-x  9 amit amit 4096 Sep 13 19:06 apache-tomcat-10.1.55_Linux_Server/
drwxr-xr-x  3 root root 4096 Oct 20 2024 brave.com/
drwxr-xr-x  5 root root 4096 Sep 26 12:17 Build_Backup/
drwxr-xr-x  5 root root 4096 Nov  3 2024 BurpSuiteCommunity/
drwx----- 2 root root 4096 Sep 27 09:27 certificates/
drwxr-xr-x  5 root root 4096 Sep 26 21:07 Deployment_Backup/
drwxr-xr-x  3 root root 4096 Sep 20 13:51 Tomcat_Logs/
drwxr-xr-x  6 root root 4096 Oct 12 2024 wine-stable/
amit@red-wolf:/opt$
```

STEP 4 — Stop Tomcat

Go to bin/./[shatdown.sh](#)

STEP 5 — Create the SSL Certificate

Now we'll create the certificate directly inside:

/opt/certificates/

Run All :

```
/usr/lib/jvm/java-21-openjdk-amd64/bin/keytool -genkeypair \  
-alias tomcat \  
-keyalg RSA \  
-keysize 2048 \  
-validity 3650 \  
-storetype PKCS12 \  
-keystore /opt/certificates/tomcat.p12 \  
-ext SAN=dns:amit.pachpute.in,dns:localhost,ip:192.168.0.104,ip:127.0.0.1
```

```
amit@red-wolf:/opt$ cd certificates/  
amit@red-wolf:/opt/certificates$ /usr/lib/jvm/java-21-openjdk-amd64/bin/keytool -genkeypair \  
-alias tomcat \  
-keyalg RSA \  
-keysize 2048 \  
-validity 3650 \  
-storetype PKCS12 \  
-keystore /opt/certificates/tomcat.p12 \  
-ext SAN=dns:amit.pachpute.in,dns:localhost,ip:192.168.0.104,ip:127.0.0.1  
Enter keystore password: |
```

Enter keystore password: root@123

Re-enter new password: root@123

```
amit@red-wolf:/opt$ cd certificates/  
amit@red-wolf:/opt/certificates$ /usr/lib/jvm/java-21-openjdk-amd64/bin/keytool -genkeypair \  
-alias tomcat \  
-keyalg RSA \  
-keysize 2048 \  
-validity 3650 \  
-storetype PKCS12 \  
-keystore /opt/certificates/tomcat.p12 \  
-ext SAN=dns:amit.pachpute.in,dns:localhost,ip:192.168.0.104,ip:127.0.0.1  
Enter keystore password:  
Re-enter new password:  
Enter the distinguished name. Provide a single dot (.) to leave a sub-component empty or press ENTER to use the default value in braces.  
What is your first and last name?  
[Unknown]: amit.pachpute.in  
What is the name of your organizational unit?  
[Unknown]: IT  
What is the name of your organization?  
[Unknown]: AMIT  
What is the name of your City or Locality?  
[Unknown]: Mumbai  
What is the name of your State or Province?  
[Unknown]: Maharashtra  
What is the two-letter country code for this unit?  
[Unknown]: IN  
Is CN=amit.pachpute.in, OU=IT, O=AMIT, L=Mumbai, ST=Maharashtra, C=IN correct?  
[no]: yes  
  
Generating 2,048 bit RSA key pair and self-signed certificate (SHA384withRSA) with a validity of 3,650 days  
for: CN=amit.pachpute.in, OU=IT, O=AMIT, L=Mumbai, ST=Maharashtra, C=IN  
amit@red-wolf:/opt/certificates$
```

```
amit@red-wolf:/opt/certificates$ /usr/lib/jvm/java-21-openjdk-amd64/bin/keytool -genkeypair \  
-alias tomcat \  
-keyalg RSA \  
-keysize 2048 \  
-validity 3650 \  
-storetype PKCS12 \  
-keystore /opt/certificates/tomcat.p12 \  
-ext SAN=dns:amit.pachpute.in,dns:localhost,ip:192.168.0.104,ip:127.0.0.1
```

Enter keystore password: root@123

Re-enter new password: root@123

Enter the distinguished name. Provide a single dot (.) to leave a sub-component empty or press ENTER to use the default value in braces.

What is your first and last name?

[Unknown]: amit.pachpute.in

What is the name of your organizational unit?

[Unknown]: IT

What is the name of your organization?

[Unknown]: AMIT

What is the name of your City or Locality?

[Unknown]: Mumbai

What is the name of your State or Province?

[Unknown]: Maharashtra

What is the two-letter country code for this unit?

[Unknown]: IN

Is CN=amit.pachpute.in, OU=IT, O=AMIT, L=Mumbai, ST=Maharashtra, C=IN correct?

[no]: yes

Generating 2,048 bit RSA key pair and self-signed certificate (SHA384withRSA) with a validity of 3,650 days

for: CN=amit.pachpute.in, OU=IT, O=AMIT, L=Mumbai, ST=Maharashtra, C=IN
amit@red-wolf:/opt/certificates\$

STEP 6 — Verify the Certificate File

```
amit@red-wolf:/opt/certificates$ ls
tomcat.p12
amit@red-wolf:/opt/certificates$ |
```

STEP 7 — Verify Certificate Details

```
/usr/lib/jvm/java-21-openjdk-amd64/bin/keytool -list -v \
-keystore /opt/certificates/tomcat.p12 \
-storetype PKCS12
```

```
amit@red-wolf:/opt/certificates$ /usr/lib/jvm/java-21-openjdk-amd64/bin/keytool -list -v \
-keystore /opt/certificates/tomcat.p12 \
-storetype PKCS12
Enter keystore password:
Keystore type: PKCS12
Keystore provider: SUN

Your keystore contains 1 entry

Alias name: tomcat
Creation date: 27-Sept-2026
Entry type: PrivateKeyEntry
Certificate chain length: 1
Certificate[1]:
Owner: CN=amit.pachpute.in, OU=IT, O=AMIT, L=Mumbai, ST=Maharashtra, C=IN
Issuer: CN=amit.pachpute.in, OU=IT, O=AMIT, L=Mumbai, ST=Maharashtra, C=IN
Serial number: 35a902729cd1af5e
Valid from: Sun Sep 27 09:51:10 IST 2026 until: Wed Sep 24 09:51:10 IST 2036
Certificate fingerprints:
    SHA1: 0171:4725:54:D3:F5:36:43:E4:D2:2F:40:AC:4D:24:3A:AA:25:B3
    SHA256: 30:B4:26:5E:8C:3E:05:04:46:2A:BF:75:B2:6C:36:5F:ED:36:8D:79:C0:BB:BF:79:77:C4:B2:9B:3E:4A:EA:BB
Signature algorithm name: SHA384withRSA
Subject Public Key Algorithm: 2048-bit RSA key
Version: 3

Extensions:
#1: ObjectId: 2.5.29.17 Criticality=false
SubjectAlternativeName [
  DNSName: amit.pachpute.in
  DNSName: localhost
  IPAddress: 192.168.0.104
  IPAddress: 127.0.0.1
]
#2: ObjectId: 2.5.29.14 Criticality=false
SubjectKeyIdentifier [
  KeyIdentifier [
    0000: 49 30 B0 CD 0F 10 93 FD 1F 67 0A 4E F0 9E 8D 3A 10.....g.N...:
    0010: F2 C1 4C A5 ..L.
  ]
]

*****
amit@red-wolf:/opt/certificates$ |
```

Secure certictae :

```
amit@red-wolf:/opt/certificates$ ll
```

```
total 12
```

```
drwxrwxrwx  2 root root 4096 Sep 27 09:51 ./
```

```
drwxr-xr-x 10 root root 4096 Sep 27 09:27 ../
```

```
-rw-rw-r--  1 amit amit 2792 Sep 27 09:51 tomcat.p12
```

```
amit@red-wolf:/opt/certificates$ chmod 600 /opt/certificates/tomcat.p12
```

```
amit@red-wolf:/opt/certificates$ ll
```

```
total 12
```

```
drwxrwxrwx  2 root root 4096 Sep 27 09:51 ./
```

```
drwxr-xr-x 10 root root 4096 Sep 27 09:27 ../
```

```
-rw-----  1 amit amit 2792 Sep 27 09:51 tomcat.p12
```

```
tomcat.p12
amit@red-wolf:/opt/certificates$ ll
total 12
drwxrwxrwx  2 root root 4096 Sep 27 09:51 ./
drwxr-xr-x 10 root root 4096 Sep 27 09:27 ../
-rw-rw-r--  1 amit amit 2792 Sep 27 09:51 tomcat.p12
amit@red-wolf:/opt/certificates$ chmod 600 /opt/certificates/tomcat.p12
amit@red-wolf:/opt/certificates$ ll
total 12
drwxrwxrwx  2 root root 4096 Sep 27 09:51 ./
drwxr-xr-x 10 root root 4096 Sep 27 09:27 ../
-rw-----  1 amit amit 2792 Sep 27 09:51 tomcat.p12
amit@red-wolf:/opt/certificates$
```

STEP 8 — Open Tomcat server.xml

```
cd /opt/apache-tomcat-10.1.55_Linux_Server/conf
```

```
nano server.xml
```


Old :

```
<Connector port="8686" protocol="HTTP/1.1"
    connectionTimeout="20000"
    redirectPort="8443"
    maxParameterCount="1000"
/>
```

New :

```
<Connector
    port="8686"
    protocol="org.apache.coyote.http11.Http11NioProtocol"
    maxThreads="150"
    SSLEnabled="true"
    scheme="https"
    secure="true">

    <SSLHostConfig>
        <Certificate
            certificateKeystoreFile="/opt/certificates/tomcat.p12"
            certificateKeystorePassword="root@123"
            type="RSA" />
        </SSLHostConfig>
    </Connector>
```

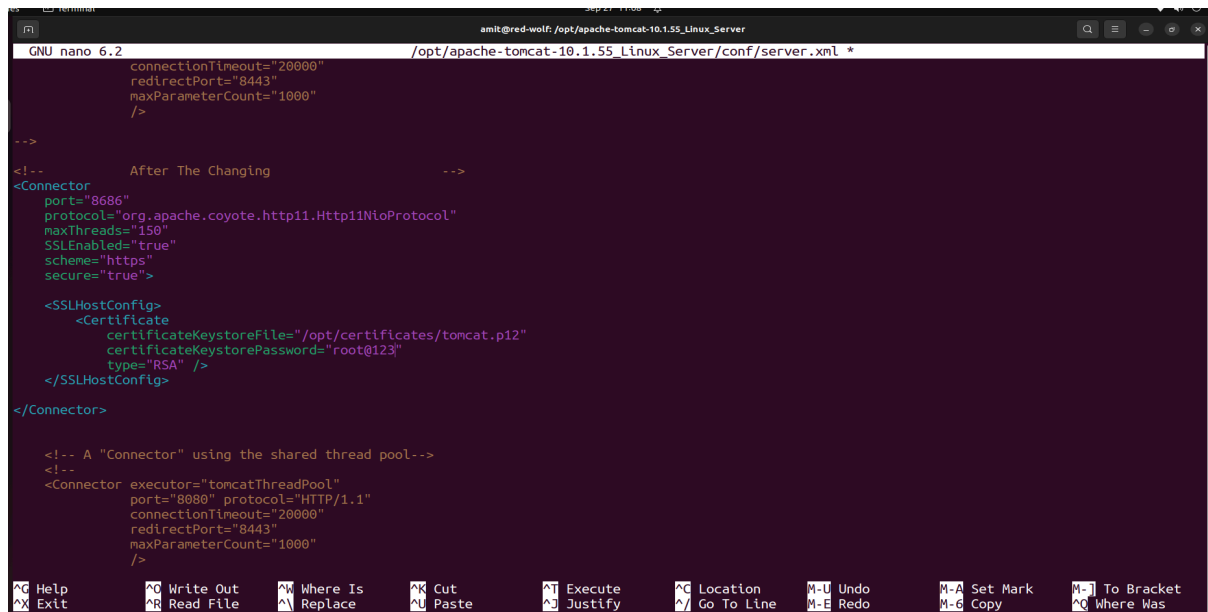

```
GNU nano 6.2 /opt/apache-tomcat-10.1.55_Linux_Server/conf/server.xml *
    connectionTimeout="20000"
    redirectPort="8443"
    maxParameterCount="1000"
  />

<!-- After The Changing -->
<Connector
  port="8686"
  protocol="org.apache.coyote.http11.Http11NioProtocol"
  maxThreads="150"
  SSLEnabled="true"
  scheme="https"
  secure="true">

  <SSLHostConfig>
    <Certificate
      certificateKeystoreFile="/opt/certificates/tomcat.p12"
      certificateKeystorePassword="root@123"
      type="RSA" />
    </SSLHostConfig>
  </Connector>

<!-- A "Connector" using the shared thread pool-->
<!--
<Connector executor="tomcatThreadPool"
  port="8080" protocol="HTTP/1.1"
  connectionTimeout="20000"
  redirectPort="8443"
  maxParameterCount="1000"
  />

^G Help      ^O Write Out  ^W Where Is   ^K Cut        ^J Execute    ^L Location   ^U Undo       ^M Set Mark   ^, To Bracket
^X Exit      ^R Read File  ^_ Replace    ^V Paste      ^_ Justify    ^_ Go To Line ^- Redo       ^C Copy       ^_ Where Was
```

STEP 9 — Verify the Configuration

Run:

```
grep -n "8686" /opt/apache-tomcat-10.1.55_Linux_Server/conf/server.xml
```

You should see your HTTPS connector.

Also verify the certificate path:

```
grep -n "keystore" /opt/apache-tomcat-10.1.55_Linux_Server/conf/server.xml
```

Expected:

```
keystoreFile="/opt/certificates/tomcat.p12"
```

Verify These Things Also :

```
amit@red-wolf:/opt/apache-tomcat-10.1.55_Linux_Server/conf$
```

```
grep -n "8686" /opt/apache-tomcat-10.1.55_Linux_Server/conf/server.xml
```

```
74:<!--    <Connector port="8686" protocol="HTTP/1.1"
```

```
84:  port="8686"
```


```
amit@red-wolf:/opt/apache-tomcat-10.1.55_Linux_Server/conf$
```

```
grep -n "keystore" /opt/apache-tomcat-10.1.55_Linux_Server/conf/server.xml
```

```
90:  keystoreFile="/opt/certificates/tomcat.p12"
```

```
91:  keystorePass="root@123"
```

```
92:  keystoreType="PKCS12"
```

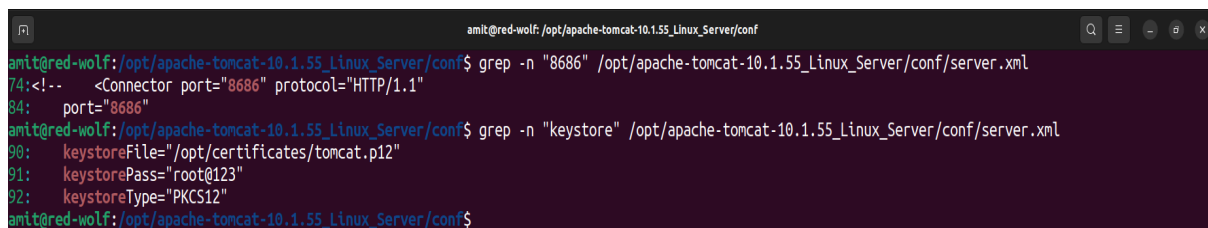


```
amit@red-wolf:/opt/apache-tomcat-10.1.55_Linux_Server/conf$ grep -n "8686" /opt/apache-tomcat-10.1.55_Linux_Server/conf/server.xml
74:<!--    <Connector port="8686" protocol="HTTP/1.1"
84:  port="8686"
amit@red-wolf:/opt/apache-tomcat-10.1.55_Linux_Server/conf$ grep -n "keystore" /opt/apache-tomcat-10.1.55_Linux_Server/conf/server.xml
90:  keystoreFile="/opt/certificates/tomcat.p12"
91:  keystorePass="root@123"
92:  keystoreType="PKCS12"
amit@red-wolf:/opt/apache-tomcat-10.1.55_Linux_Server/conf$
```

STEP 10: Changed Old Url to New In `configSetting.json` file


`amit@red-wolf:/opt/apache-tomcat-10.1.55_Linux_Server/webapps/TfrsUm_V2/assets/data$ nano configSetting.json`

Old Url : http://localhost:8686/TfrsUmApp_V2/

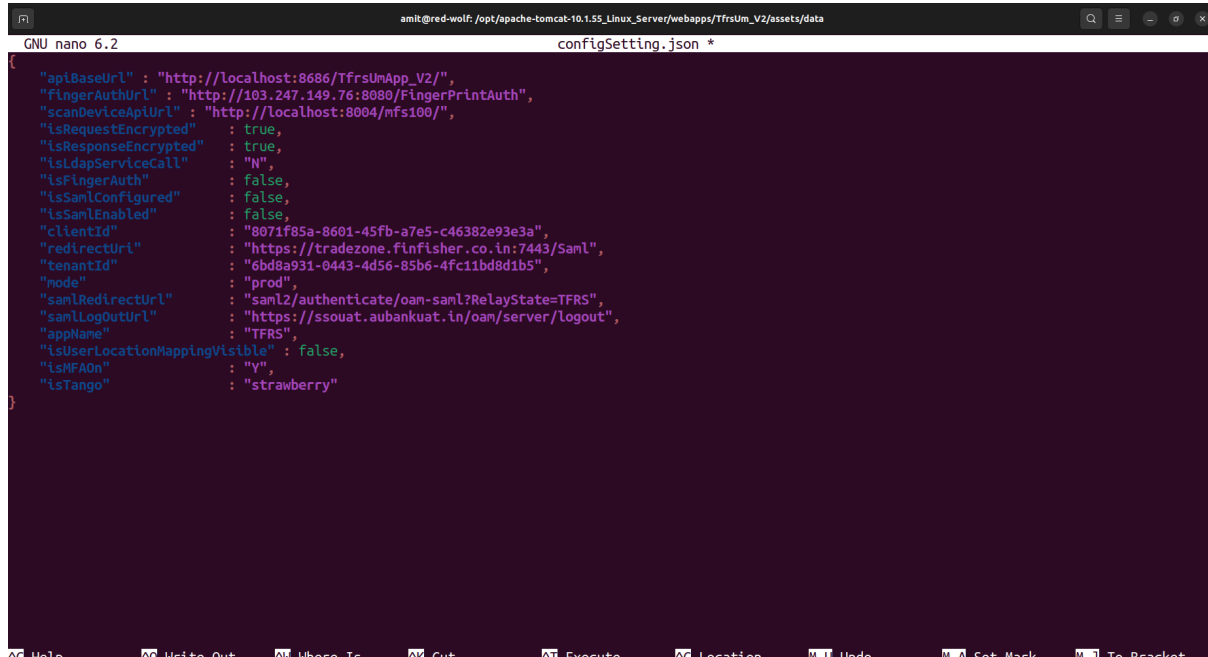

```
GNU nano 6.2 configSetting.json *
{
  "apiBaseUrl" : "http://localhost:8686/TfrsUmApp_V2/",
  "fingerAuthUrl" : "http://103.247.149.76:8080/FingerPrintAuth",
  "scanDeviceApiUrl" : "http://localhost:8004/mfs100/",
  "isRequestEncrypted" : true,
  "isResponseEncrypted" : true,
  "isLdapServiceCall" : "N",
  "isFingerAuth" : false,
  "isSamlConfigured" : false,
  "isSamlEnabled" : false,
  "clientId" : "8071f85a-8601-45fb-a7e5-c46382e93e3a",
  "redirectUrl" : "https://tradezone.flnfisher.co.in:7443/Saml",
  "tenantId" : "6bd8a931-0443-4d56-85b6-4fc11bd8d1b5",
  "mode" : "prod",
  "samlRedirectUrl" : "saml2/authenticate/oam-saml?RelayState=TFRS",
  "samlLogoutUrl" : "https://ssouat.aubankuat.in/oam/server/logout",
  "appName" : "TFRS",
  "isUserLocationMappingVisible" : false,
  "isMFAOn" : "Y",
  "isTango" : "strawberry"
}
```

To New Url: https://amit.pachpute.in:8686/TfrsUmApp_V2/

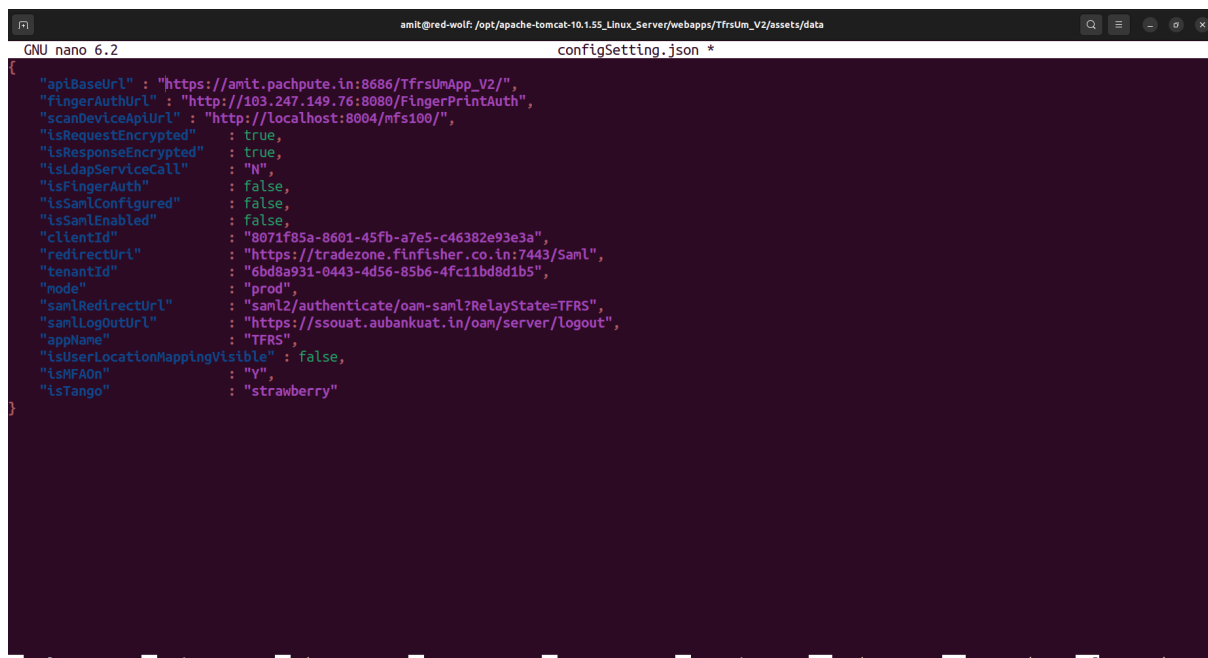

```
GNU nano 6.2 configSetting.json *
{
  "apiBaseUrl" : "https://amit.pachpute.in:8686/TfrsUmApp_V2/",
  "fingerAuthUrl" : "http://103.247.149.76:8080/FingerPrintAuth",
  "scanDeviceApiUrl" : "http://localhost:8004/mfs100/",
  "isRequestEncrypted" : true,
  "isResponseEncrypted" : true,
  "isLdapServiceCall" : "N",
  "isFingerAuth" : false,
  "isSamlConfigured" : false,
  "isSamlEnabled" : false,
  "clientId" : "8071f85a-8601-45fb-a7e5-c46382e93e3a",
  "redirectUrl" : "https://tradezone.flnfisher.co.in:7443/Saml",
  "tenantId" : "6bd8a931-0443-4d56-85b6-4fc11bd8d1b5",
  "mode" : "prod",
  "samlRedirectUrl" : "saml2/authenticate/oam-saml?RelayState=TFRS",
  "samlLogoutUrl" : "https://ssouat.aubankuat.in/oam/server/logout",
  "appName" : "TFRS",
  "isUserLocationMappingVisible" : false,
  "isMFAOn" : "Y",
  "isTango" : "strawberry"
}
```

STEP 11: Now Changed the Database Configuration :



Common Uri & isSSLEnable


-- Common Uri

SELECT * FROM sbm_tfrsum.tfrs_constants where
CONSTANT_NAME like '%commonUri%';

-- Old : http://localhost:8686/TfrsUmApp_V2/

-- New : https://amit.pachpute.in:8686/TfrsUmApp_V2/

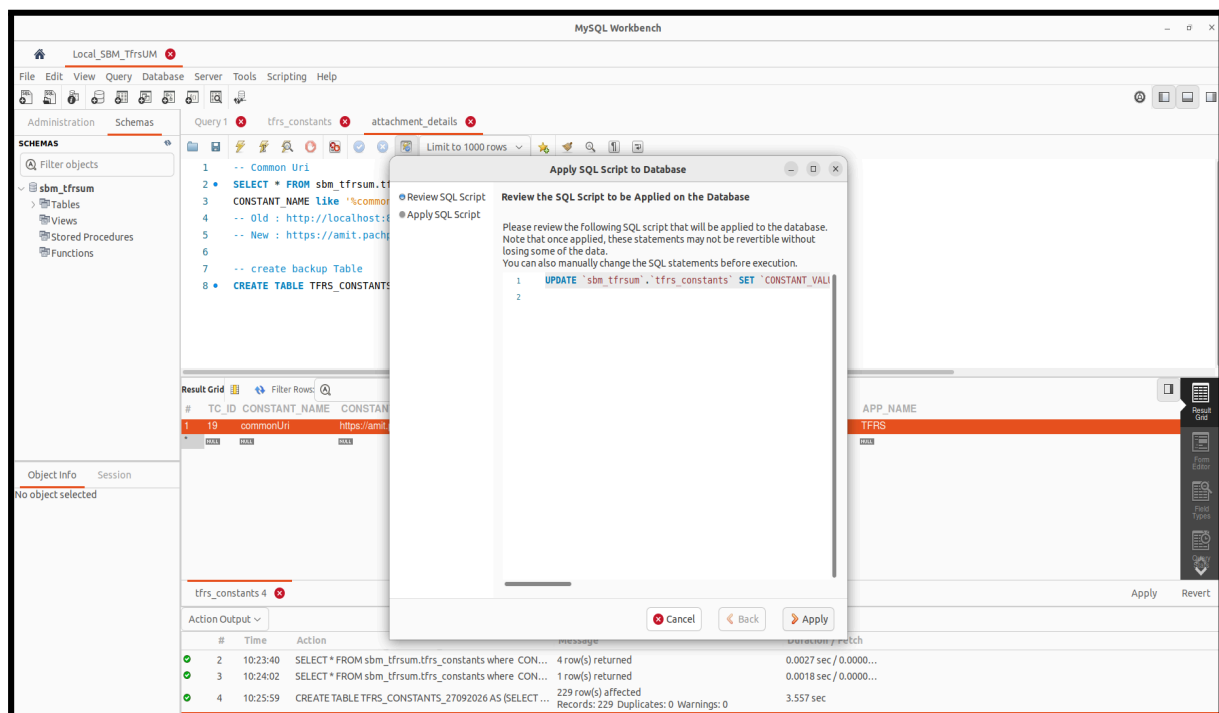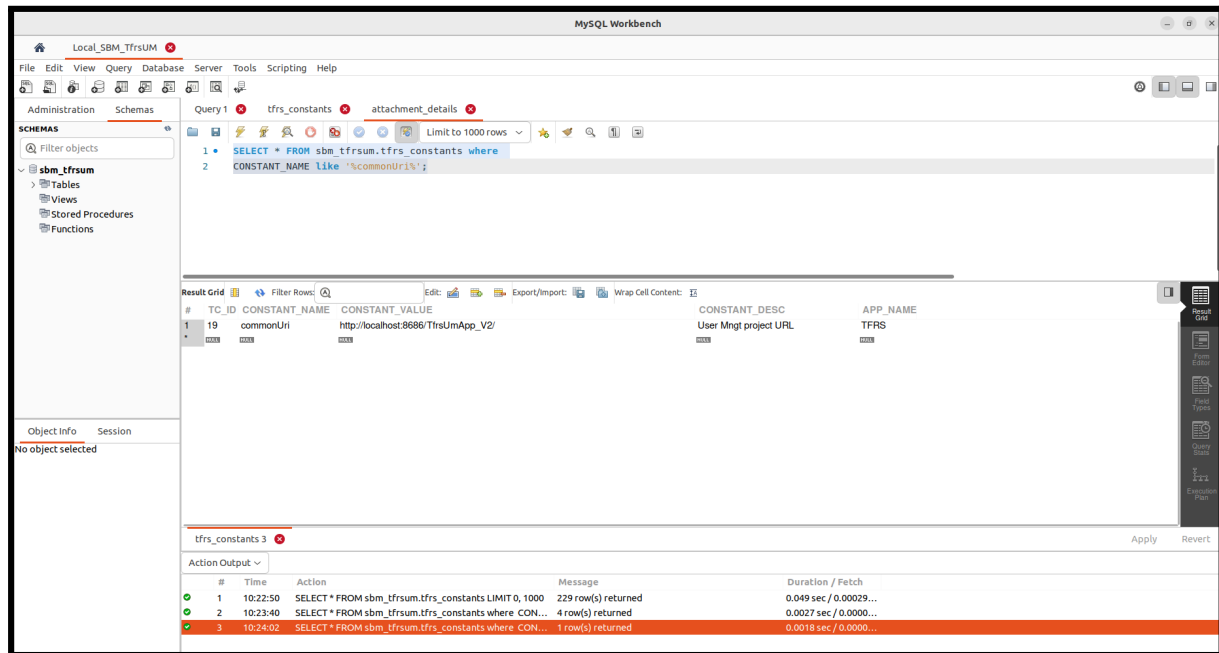

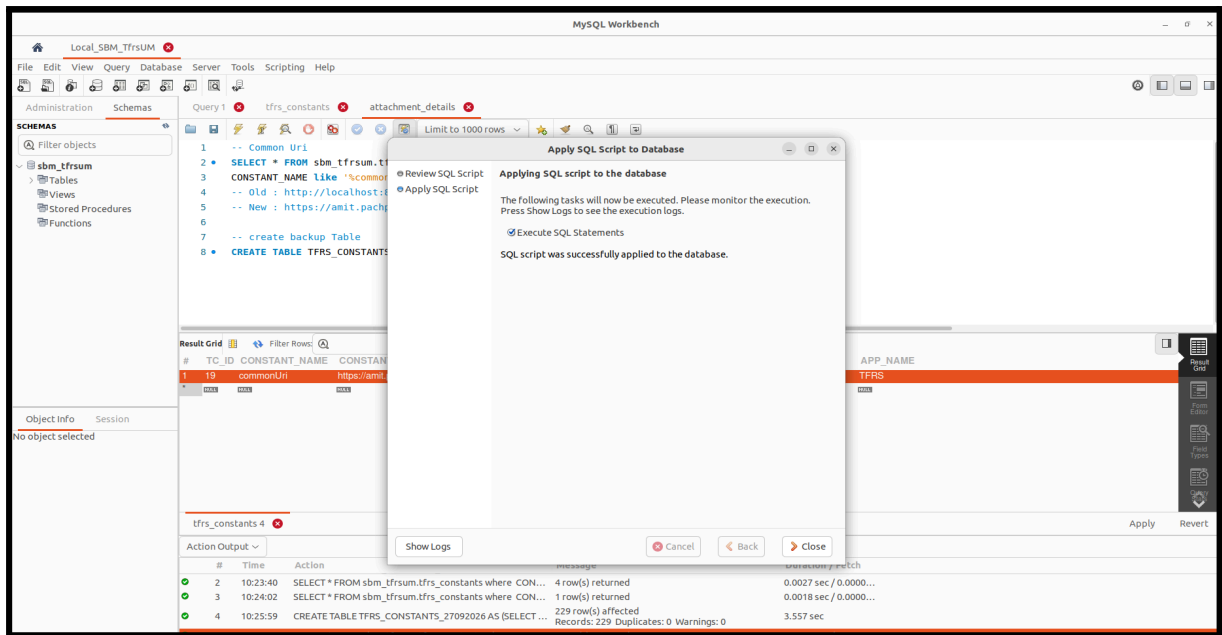


Also Update The isSSLEnable : N to Y

-- Enable Is SSL Y

SELECT * FROM sbm_tfrsum.tfrs_constants where
CONSTANT_NAME like '%isSSLEnable%';

-- Old : N

-- New : Y

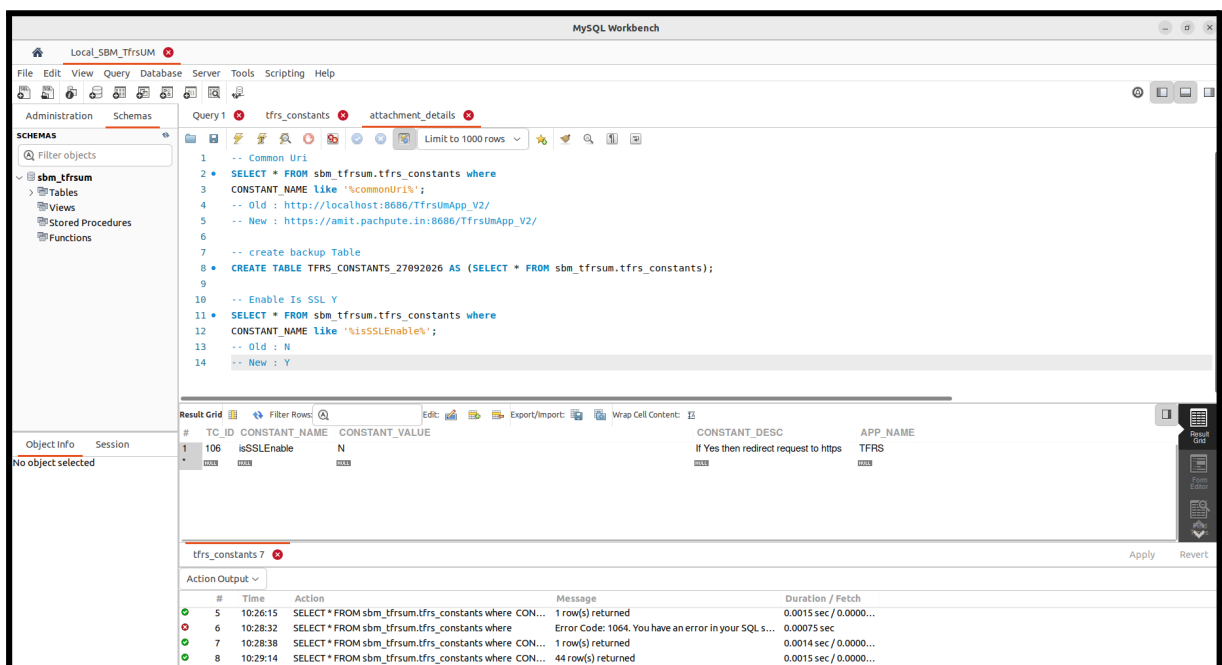

SQL - QUERYs

-- Common Uri

```
SELECT * FROM sbm_tfrsum.tfrs_constants where  
CONSTANT_NAME like '%commonUri%';
```

-- Old : http://localhost:8686/TfrsUmApp_V2/

-- New : https://amit.pachpute.in:8686/TfrsUmApp_V2/

-- Create backup Table

```
CREATE TABLE TFRS_CONSTANTS_27092026 AS (SELECT * FROM sbm_tfrsum.tfrs_constants);
```

-- Enable Is SSL Y

```
SELECT * FROM sbm_tfrsum.tfrs_constants where  
CONSTANT_NAME like '%isSSLEnable%';
```

-- Old : N

-- New : Y

STEP 12 — Start Tomcat

Go to:

```
cd /opt/apache-tomcat-10.1.55_Linux_Server
```

Start:

```
./bin/startup.sh
```

Expected:

Tomcat started.


STEP 13 — Immediately Check Tomcat Logs

Run:

```
tail -f /opt/apache-tomcat-10.1.55_Linux_Server/logs/catalina.out
```

STEP 14 — Open Front End & BackEnd URL and Check It Works Properly

FontEnd Url : https://amit.pachpute.in:8686/TfrsUm_V2/

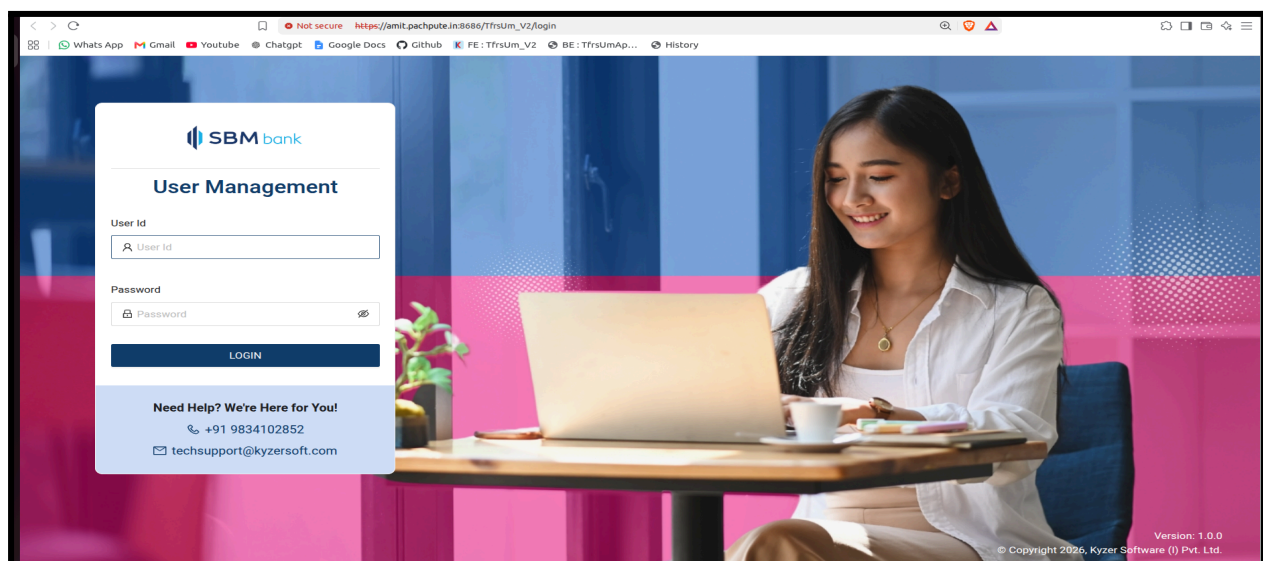

BackEnd Url : https://amit.pachpute.in:8686/TfrsUmApp_V2/

