
Object Reference for the Salesforce Platform

Version 66.0, Spring '26



CONTENTS

Chapter 1: Overview of Salesforce Objects and Fields	1
Release Notes	2
Primitive Data Types	2
Field Types	4
API Field Properties	10
Required Fields	11
System Fields	12
Frequently Occurring Fields	13
Compound Fields	15
Address Compound Fields	15
Geolocation Compound Field	18
Compound Field Considerations and Limitations	19
Custom Objects	21
Custom Fields	24
AppExchange Object Prefixes and the API	25
Relationships Among Standard Objects and Fields	25
Factors that Affect Data Access	27
Field and Type Differences in Salesforce Apps and APIs	29
External Objects	29
Big Objects	31
Define and Deploy Custom Big Objects	33
Object Interfaces	39
REFERENCE	40
Chapter 2: Salesforce Object Behavior	40
Object Groups	43
Salesforce Common Objects	43
Salesforce Cloud Objects	44
Salesforce High-Scale Objects	44
Salesforce External Data Objects	50
Salesforce Object Types	51
Object Cheatsheet	52
Chapter 3: Associated Objects (Feed, History, OwnerSharingRule, Share, and ChangeEvent Objects)	55
StandardObjectName Feed Feed	55
StandardObjectName History History	63
StandardObjectName OwnerSharingRule OwnerSharingRule	65

StandardObjectName Share	67
StandardObjectNameChangeEvent	68
Chapter 4: Custom Objects	78
FSL__Time_Dependency__c	78
Custom Metadata Type __mdt __mdt	80
Custom Object __c __c	83
Custom Object __Feed __Feed	87
Chapter 5: Object Interfaces	95
PriceAdjustmentGroup	96
PriceAdjustmentItem	98
SalesTransaction	103
SalesTransactionItem	104
Chapter 6: Standard Objects	115
AbnExperiment	224
AbnExperimentCohort	229
AcceptedEventRelation	233
Account	234
AccountBrand	260
AccountContactRelation	264
AccountCleanInfo	266
AccountContactRole	288
AccountInsight	290
AccountOwnerSharingRule	293
AccountPartner	297
AccountPlan	299
AccountPlanObjective	305
AccountPlanObjectiveMeasure	309
AccountPlanObjMeasCalcCond	313
AccountPlanObjMeasCalcDef	315
AccountPlanObjMeasCalcDefLocalization	318
AccountPlanObjMeasRela	320
AccountRelationship	322
AccountRelationshipShareRule	324
AccountShare	328
AccountTag	332
AccountTeamMember	334
AccountTerritoryAssignmentRule	337
AccountTerritoryAssignmentRuleItem	339
AccountTerritorySharingRule	341
AccountUserTerritory2View	344
ActionCadence	345

Contents

ActionCadenceRule	350
ActionCadenceRuleCondition	353
ActionCadenceStep	355
ActionCadenceStepTracker	368
ActionCadenceStepVariant	375
ActionCadenceTracker	377
ActionCdncStpMonthlyMetric	383
ActionLinkGroupTemplate	395
ActionLinkTemplate	398
ActionPlan	403
ActionPlanItem	406
ActionPlanTemplate	409
ActionPlanTemplateItem	415
ActionPlanTemplateItemValue	418
ActionPlanTemplateVersion	425
ActiveFeatureLicenseMetric	427
ActivePermSetLicenseMetric	429
ActiveProfileMetric	431
ActiveScratchOrg	432
ActivityFieldHistory	437
ActivityHistory	441
ActivityMetric	453
ActivityUsrConnectionStatus	457
AdditionalNumber	460
Address	462
AgentWork	466
AgentWorkConversationalData	479
AgentWorkSkill	484
AIApplication	486
AIApplicationConfig	488
AiGenActionItem	489
AllInsightAction	493
AllInsightFeedback	496
AllInsightReason	498
AllInsightValue	501
AiJobRun	506
AiJobRunItem	508
AiModelLanguage	511
AIRecordInsight	513
AIResearchPromptResult	518
AllowedEmailDomain	522
AlternativePaymentMethod	523
AnalyticsChangeEventLog	532
AnalyticsDashboard	536

Contents

AnalyticsDownloadEventLog	539
AnalyticsInteractEventLog	543
AnalyticsLicensedAsset	547
AnalyticsPerfEventLog	548
AnalyticsVisualization	552
AnalyticsVizField	555
AnalyticsVizViewDef	558
AnalyticsWorkspace	561
AnalyticsWorkspaceAsset	563
Announcement	565
ApexCalloutEventLog	567
ApexClass	571
ApexComponent	574
ApexEmailNotification	576
ApexExecutionEventLog	577
ApexExtlCalloutEventLog	582
ApexInlineEventLog	586
ApexLog	586
ApexPage	589
ApexPageInfo	592
ApexRestApiEventLog	594
ApexSoapApiEventLog	600
ApexTestQueueItem	605
ApexTestResult	607
ApexTestResultLimits	611
ApexTestRunResult	614
ApexTestSuite	618
ApexTrigger	618
ApexTriggerEventLog	622
ApexTypeImplementor	627
ApexUnexpectedExcpEventLog	631
ApiTotalUsageEventLog	633
AppAnalyticsQueryRequest	636
AppDefinition	642
AppExtension	646
ApplicationFormTemplate	648
AppMenuItem	650
AppointmentAssignmentPolicy	657
AppointmentScheduleAggr	659
AppointmentScheduleLog	661
AppointmentSchedulingPolicy	664
AppointmentTopicTimeSlot	669
Approval	672
ApprovalAlertContentDef	674

Contents

ApprovalSubmission	676
ApprovalSubmissionDetail	679
ApprovalWorkItem	683
ApprovalWorkItemCondition	687
ApprovalWorkItemCriteria	691
AppTabMember	692
ApptBundleAggrDurDnscale	694
ApptBundleAggrPolicy	696
ApptBundleConfig	701
ApptBundlePolicy	706
ApptBundlePolicySvcTerr	709
ApptBundlePropagatePolicy	711
ApptBundleRestrictPolicy	714
ApptBundleSortPolicy	717
AppUsageAssignment	719
ArchiveActivity	720
ArchivePolicyDefinition	725
Article Type __DataCategorySelection __DataCategorySelection	727
Asset	729
AssetAction	745
AssetActionSource	753
AssetAttribute	761
AssetContractRelationship	763
AssetDowntimePeriod	766
AssetOwnerSharingRule	768
AssetRateAdjustment	770
AssetRateCardEntry	771
AssetRelationship	775
AssetShare	780
AssetStatePeriod	783
AssetStatePeriodAttribute	788
AssetTag	790
AssetTokenEvent	791
AssetWarranty	791
AssignedResource	795
AssignmentRule	798
AssociatedLocation	799
AsyncApexJob	802
AsyncOperationLog	805
AsyncOperationTracker	808
AsyncOpSyndicationFeedFile	817
AttachedContentDocument	819
AttachedContentNote	823
Attachment	825

Contents

AttachmentEventLog	830
AttribModel	832
AttribModelStage	838
AttribModelStageMetric	841
AttributeDefinition	843
AttributePicklist	847
AttributePicklistValue	850
AsyncReportRunEventLog	853
Audience	859
AuraDefinition	862
AuraDefinitionBundle	864
AuraDefinitionBundleInfo	866
AuraDefinitionInfo	866
AuraRequestEventLog	866
AuthConfig	870
AuthConfigProviders	873
AuthorizationForm	874
AuthorizationFormConsent	877
AuthorizationFormDataUse	881
AuthorizationFormText	884
AuthProvider	886
AuthProvParamFwdAllowlist	895
AuthSession	896
AutomatedAction	901
AutomatedActionCondition	906
AutomatedActionOverride	909
AutomatedActionParameter	911
AutomatedActionReminder	913
BackgroundOperation	916
BackgroundOperationResult	921
BatchApexErrorEvent	923
BillingBatchScheduler	923
BillingPeriodItem	929
BillingPolicy	933
BillingSchedule	935
BillingScheduleGroup	942
BillingTreatment	954
BillingTreatmentItem	957
BlockedRedirectEventLog	961
Bookmark	963
BotDefinition	965
BotVersion	966
BrandingSet	968
BrandTemplate	970

Contents

Brief	972
BriefcaseAssignment	975
BriefcaseDefinition	976
BriefcaseRule	979
BriefcaseRuleFilter	982
BroadcastCommAudience	984
BroadcastCommunication	988
BroadcastTopic	991
BroadcastTopicGroup	994
BroadcastTopicNetwork	995
BrowserPolicyViolation	997
BulkApi2EventLog	999
BulkApiEventLog	1003
BulkApiRequestEventLog	1007
BusinessBrand	1011
BusinessAlert	1013
BusinessAlertStatus	1016
BusinessHours	1017
Business Process	1021
BusinessProcessDefinition	1023
BusinessProcessFeedback	1025
BusinessProcessGroup	1026
BuyerAccount	1028
BuyerCriteria	1033
BuyerGroup	1036
BuyerGroupBuyerCriteria	1038
BuyerGroupMember	1040
BuyerGroupPricebook	1042
BuyerGroupRelatedObject	1044
CalcProcStepRelationship	1046
CalculatedInsightRangeBound	1048
CalculationMatrix	1051
CalculationMatrixColumn	1055
CalculationMatrixRow	1057
CalculationMatrixVersion	1059
CalculationProcedure	1063
CalculationProcedureStep	1065
CalculationProcedureVariable	1071
CalculationProcedureVersion	1074
Calendar	1077
CalendarView	1078
CallCenter	1083
CallCenterRoutingMap	1084
CallCoachingMediaProvider	1086

Contents

CallCtrAgentFavTrfrDest	1087
CallCtrAgentFavTrfrDestShare	1089
CallDisposition	1091
CallDispositionCategory	1092
CallTemplate	1094
Campaign	1097
CampaignInfluence	1112
CampaignInfluenceModel	1115
CampaignMember	1118
CampaignMemberStatus	1126
CampaignOwnerSharingRule	1128
CampaignShare	1130
CampaignTag	1132
CardPaymentMethod	1134
CartCheckoutSession	1147
CartDeliveryGroup	1149
CartDeliveryGroupMethod	1158
CartDeliveryGroupMethodAdj	1162
CartItem	1165
CartItemAttribute	1184
CartItemPriceAdjustment	1186
CartTax	1192
CartValidationOutput	1194
Case	1197
CaseArticle	1210
CaseComment	1211
CaseContactRole	1214
CaseHistory	1216
CaseHistory2	1218
CaseMilestone	1220
CaseOwnerSharingRule	1224
CaseParticipant	1226
CaseRelatedIssue	1230
CaseShare	1232
CaseSolution	1234
CaseStatus	1236
CaseSubjectParticle	1237
CaseTag	1240
CaseTeamMember	1241
CaseTeamRole	1244
CaseTeamTemplate	1245
CaseTeamTemplateMember	1245
CaseTeamTemplateRecord	1246
CategoryData	1247

Contents

CategoryNode	1249
CategoryNodeLocalization	1250
ChangeRequest	1256
ChangeRequestRelatedIssue	1262
ChangeRequestRelatedItem	1264
ChangeSetOperationEventLog	1267
ChannelObjectLinkingRule	1269
ChannelProgram	1273
ChannelProgramLevel	1275
ChannelProgramMember	1277
ChatterActivity	1279
ChatterAnswersActivity	1281
ChatterAnswersReputationLevel	1285
ChatterConversation	1286
ChatterConversationMember	1287
ChatterExtension	1288
ChatterExtensionConfig	1291
ChatterMessage	1292
ClientBrowser	1294
CollaborationGroup	1295
CollaborationGroupMember	1302
CollaborationGroupMemberRequest	1304
CollaborationGroupRecord	1306
CollaborationInvitation	1307
CollaborationRoom	1310
CollabDocumentMetric	1312
CollabDocumentMetricRecord	1315
CollabTemplateMetric	1316
CollabTemplateMetricRecord	1318
CollabUserEngagementMetric	1319
CollabUserEngmtRecordLink	1322
ColorDefinition	1323
ContCalloutSummaryEventLog	1324
CombinedAttachment	1327
CommerceEntitlementBuyerGroup	1331
CommerceEntitlementPolicy	1332
CommerceEntitlementPolicyShare	1335
CommerceEntitlementProduct	1337
CommissionSchedule	1338
CommissionScheduleAssignment	1342
CommSubscription	1346
CommSubscriptionChannelType	1348
CommSubscriptionConsent	1351
CommSubscriptionTiming	1356

Contents

Community (Zone)	1359
ConcurApexLimitEventLog	1361
ConnectedApplication	1363
ConferenceNumber	1366
Consumption Rate	1368
Consumption Schedule	1371
Contact	1375
ContactCenterChannel	1395
ContactCleanInfo	1398
ContactDailyMetric	1407
ContactMonthlyMetric	1415
ContactPointAddress	1422
ContactPointConsent	1429
ContactPointEmail	1434
ContactPointPhone	1438
ContactPointTypeConsent	1443
ContactOwnerSharingRule	1449
ContactRequest	1451
ContactRequestShare	1456
ContactShare	1458
ContactSuggestionInsight	1460
ContactTag	1465
ContentAsset	1467
ContentBody	1469
ContentDistribution	1469
ContentDistributionEventLog	1476
ContentDistributionView	1477
ContentDocument	1479
ContentDocumentHistory	1487
ContentDocumentLink	1489
ContentDocumentListViewMapping	1495
ContentDocumentSubscription	1496
ContentDocLinkEventLog	1497
ContentFolder	1499
ContentFolderItem	1501
ContentFolderLink	1502
ContentFolderMember	1504
ContentHubItem	1505
ContentHubRepository	1509
ContentNote	1511
ContentNotification	1515
ContentTagSubscription	1516
ContentTaxonomy	1517
ContentTaxonomyRelatedTerm	1518

Contents

ContentTaxonomyTerm	1520
ContentTaxonomyTermRelatedTerm	1521
ContentTaxonomyTermRelationshipType	1523
ContentTransferEventLog	1524
ContentUserSubscription	1527
ContentVersion	1528
ContentVersionComment	1544
ContentVersionHistory	1545
ContentVersionRating	1547
ContentWorkspace	1549
ContentWorkspaceDoc	1553
ContentWorkspaceMember	1555
ContentWorkspacePermission	1556
ContentWorkspaceSubscription	1560
ContextParamMap	1561
Contract	1562
ContractContactRole	1576
ContractLineItem	1578
ContractLineOutcome	1582
ContractLineOutcomeData	1587
ContractStatus	1590
ContractTag	1591
ConvAnalysisSummary	1593
ConvAnalysisTopic	1595
ConvAnalysisTopicEntry	1598
Conversation	1599
ConversationApiLog	1601
ConversationContextEntry	1603
ConversationChannelDefinition	1604
ConversationEntry	1613
ConversationParticipant	1619
ConvIntelligenceSignalRule	1621
ConvIntelligenceSignalSubRule	1624
ConvMessageSendRequest	1625
ConversationVendorInfo	1632
CorsWhitelistEntry	1643
Coupon	1646
CouponCodeRedemption	1649
CreditMemo	1651
CreditMemoAddressGroup	1659
CreditMemoInvApplication	1662
CreditMemoLine	1666
Crisis	1675
CronJobDetail	1677

Contents

CronTrigger	1678
CryptoProdCatgWalletGroup	1681
CspTrustedSite	1683
CspViolationEventLog	1688
CurrencyType	1692
CustExpIntlTransfSetup	1693
CustomBrand	1695
CustomBrandAsset	1696
CustomFieldDisplayValue	1700
CustomHelpMenuItem	1702
CustomHelpMenuSection	1703
CustomHttpHeader	1705
CustomMsgChannel	1707
CustomNotificationType	1709
CustomPermission	1711
CustomPermissionDependency	1715
Customer	1717
DandBCompany	1719
Dashboard	1742
DashboardComponent	1750
DashboardTag	1751
DataAssessmentFieldMetric	1753
DataAssessmentMetric	1754
DataAssessmentValueMetric	1756
DatabaseSaveEventLog	1757
DatacloudCompany	1760
DatacloudContact	1769
DatacloudDandBCompany	1774
DatacloudOwnedEntity	1797
DatacloudPurchaseUsage	1799
DataDetectJobObjectSession	1801
DataDetectJobSession	1801
DataDetectJobSessSummary	1804
DataDetectPolicy	1804
DataDetectPolicyObject	1806
DataDetectScanResult	1807
DataDetectPolicyObjField	1809
DataDetectPolicySnapshot	1810
DataDetPlcyDataSrchExps	1810
DataDetPlcyMdatScanCrit	1812
DataDetPlcySstvDataCatg	1813
DataEncryptionKey	1814
DataIntegrationRecordPurchasePermission	1820
DataKitDeployEvent	1821

Contents

DataKitDeploymentLog	1824
DatasetExport	1830
DatasetExportPart	1832
DataMaskCustomValueLibrary	1834
DataStatistics	1836
DataUseLegalBasis	1837
DataUsePurpose	1839
DataWeaveResource	1841
DatedConversionRate	1844
DealIndirectPartner	1845
DeclinedEventRelation	1848
DelegatedAccount	1850
DeleteEvent	1853
DeliveryEstimationSetup	1854
DigitalSignature	1859
DigitalWallet	1862
DirectMessage	1871
Division	1871
DivisionLocalization	1873
DocAtchDownloadEventLog	1874
Document	1876
DocumentAttachmentMap	1881
DocumentRecipient	1882
DocumentTag	1886
Domain	1887
DomainSite	1890
DsarPolicy	1892
DsarPolicyLog	1894
DuplicateJob	1897
DuplicateJobDefinition	1900
DuplicateJobMatchingRule	1901
DuplicateJobMatchingRuleDefinition	1902
DuplicateRecordItem	1903
DuplicateRecordSet	1905
DuplicateRule	1906
DynamicDataCapture	1909
ElectronicMediaGroup	1913
ElectronicMediaUse	1915
EmailContent	1916
EmailDomainFilter	1922
EmailDomainKey	1923
EmailInsight	1928
EmailInsightAction	1930
EmailMessage	1932

Contents

EmailMessageMigration	1947
EmailMessageRelation	1947
EmailRelay	1949
EmailRoutingAddress	1952
EmailServicesAddress	1953
EmailServicesFunction	1955
EmailStatus	1961
EmailTemplate	1963
EmailTemplateMonthlyMetric	1972
EmbeddedServiceDetail	1983
EmbeddedServiceLabel	1990
Employee	1991
Employee2	2002
EmployeeCrisisAssessment	2006
EmpUserProvisioningProcess	2009
EmpUserProvisionProcessErr	2011
EnablementMeasureDefinition	2014
EnablementProgram	2018
EnablementProgramDefinition	2022
EnblMeasureObjectDefinition	2025
EnblPgmTaskMeasureProgress	2028
EnblProgramSection	2029
EnblProgramTaskDefinition	2031
EnblProgramTaskMeasure	2036
EnblProgramTaskProgress	2037
EnblProgramTaskSubCategory	2040
EngagementChannelType	2043
EngagementSignal	2045
EngagementSignalCmpndMetric	2047
EngagementSignalMetric	2050
EnhancedLetterhead	2052
Entitlement	2053
EntitlementContact	2058
EntitlementTemplate	2059
EntityHistory	2061
EntityMilestone	2063
EntitySubscription	2070
EnvironmentHubMember	2073
Event	2077
EventLogFile	2098
EventLogFile Supported Event Types	2101
EventRelation	2453
EventBusSubscriber	2459
EventRelayConfig	2462

Contents

EventRelayFeedback	2466
EventStagedInviteeEmail	2469
EventTag	2471
EventWhoRelation	2473
Expense	2474
ExpenseReport	2478
ExpenseReportEntry	2480
ExpressionFilter	2482
ExpressionFilterCriteria	2484
ExpressionSetConstraintObj	2486
ExtConvParticipantIntegDef	2488
ExtDataShare	2490
ExternalAccountHierarchy	2493
ExternalAccountHierarchyHistory	2495
ExternalClientApplication	2498
ExternalDataSource	2498
ExternalDataUserAuth	2503
ExternalEncryptionRootKey	2505
ExternalEvent	2509
ExternalEventMapping	2510
ExternalSocialAccount	2513
ExtKnowledgeConnector	2517
ExtIntAppOAuthPlcyCnfg	2520
ExtIntAppOAuthSettings	2520
ExtIntAppPlcyCnfg	2520
ExtIntIdMapping	2520
ExtIntRecShrCnct	2522
ExtIntRecShrCnctAccnt	2524
ExtIntRecShrField	2525
ExtIntRecShrFieldMap	2528
ExtIntRecShrLead	2529
ExtIntRecShrObject	2531
ExtIntRecShrOpportunity	2532
ExtIntRecShrPcklstOptn	2534
ExtIntRecShrPicklistMap	2535
ExtIntRecShrRecordMap	2536
FeedAttachment	2539
FeedComment	2542
FeedItem	2549
FeedLike	2563
FeedPollChoice	2564
FeedPollVote	2566
FeedPost	2566
FeedRevision	2570

Contents

feedSignal	2573
FeedTrackedChange	2574
FieldHistoryArchive	2577
FieldChangeSnapshot	2581
FieldPermissions	2583
FieldSecurityClassification	2588
FieldServiceMobileSettings	2590
FieldServiceOrgSettings	2602
FileSearchActivity	2605
FiscalYearSettings	2607
FldSvcObjChg	2610
FldSvcObjChgDtl	2613
FlexQueueItem	2614
FlowDefinitionView	2616
FlowInterview	2628
FlowInterviewLog	2632
FlowInterviewLogEntry	2634
FlowInterviewLogOwnerSharingRule	2637
FlowInterviewOwnerSharingRule	2639
FlowInterviewShare	2640
FlowNavMetricEventLog	2642
FlowOrchestration	2647
FlowOrchestrationInstance	2653
FlowOrchestrationLog	2658
FlowOrchestrationStageInstance	2662
FlowOrchestrationStepInstance	2664
FlowOrchestrationVersion	2667
FlowOrchestrationWorkItem	2672
FlowRecord	2678
FlowRecordElement	2693
FlowRecordElementOccurrence	2695
FlowRecordRelation	2698
FlowRecordVersion	2701
FlowRecordVersionOccurrence	2715
FlowTestResult	2718
FlowTestView	2721
FlowStageRelation	2722
FlowVariableView	2724
FlowVersionView	2726
Folder	2733
FolderedContentDocument	2736
ForecastingAdjustment	2738
ForecastingColumnDefinition	2743
ForecastingColumnDefinition Formula Field Details	2746

Contents

ForecastingColumnDefinitionLocalization	2748
ForecastingCustomCategory	2754
ForecastingCustomData	2758
ForecastingDisplayedFamily	2760
ForecastingFact	2761
ForecastingFilter	2764
ForecastingFilterCondition	2766
ForecastingGroup	2769
ForecastingGroupItem	2771
ForecastingItem	2773
ForecastingOwnerAdjustment	2780
ForecastingQuota	2785
ForecastingShare	2788
ForecastingSourceDefinition	2790
ForecastingSrcRecJudgment	2794
ForecastingSubmission	2795
ForecastingSubmissionItem	2799
ForecastingType	2801
ForecastingTypeSource	2806
ForecastingUserPreference	2808
FormulaFunction	2811
FormulaFunctionAllowedType	2813
FormulaFunctionCategory	2814
FrcstCustmCatgRampRateSrc	2815
FrcstCustmzAdjustment	2817
FrcstCustmzOwnerAdjustment	2820
FulfillmentOrder	2823
FulfillmentOrderItemAdjustment	2838
FulfillmentOrderItemTax	2841
FulfillmentOrderLineItem	2844
FunctionConnection	2852
FunctionInvocationRequest	2854
FunctionReference	2858
GenAIConversationSummary	2860
GenAiFunctionDefinition	2862
GenAiPlannerDefinition	2866
GenAiPlannerFunctionDef	2868
GenAiPluginDefinition	2869
GenOpPlanRequest	2872
GeoCountry	2876
GeolocationBasedAction	2878
GeoState	2882
GtwyProvPaymentMethodType	2883
Goal	2887

Contents

GoalLink	2890
GoogleDoc	2891
Group	2892
GroupMember	2897
GroupMembershipEventLog	2898
GuestBuyerProfile	2901
HashtagDefinition	2902
HealthCareDiagnosis	2903
HealthCareProcedure	2908
Holiday	2911
IconDefinition	2915
Idea	2917
IdeaComment	2924
IdeaReputation	2926
IdeaReputationLevel	2928
IdeaTheme	2929
IdpEventLog	2931
IframeWhiteListUrl	2934
Image	2935
Incident	2939
IncidentRelatedItem	2945
Individual	2948
IndividualApplicationItem	2954
IndividualHistory	2956
IndividualShare	2957
InsufficientAccessEventLog	2959
InternalOrganizationUnit	2962
InventoryItemReservation	2964
InventoryReservation	2968
InvocableActionEventLog	2971
Invoice	2974
InvoiceAddressGroup	2984
InvoiceBatchRun	2987
InvoiceBatchRunCriteria	2993
InvoiceBatchRunRecovery	2995
InvoiceDocument	2998
InvoiceLine	3000
JobProfile	3011
JobProfileQueueGroup	3012
Knowledge__Feed	3014
Knowledge__ka	3019
Knowledge__kav	3022
Knowledge__DataCategorySelection	3031
KnowledgeableUser	3032

Contents

KnowledgeArticle	3033
KnowledgeArticleEventLog	3036
KnowledgeArticleFeedback	3040
KnowledgeArticleVersion	3045
KnowledgeArticleVersionHistory	3056
KnowledgeArticleViewStat	3058
KnowledgeArticleVoteStat	3060
LandingPage	3062
Lead	3068
LeadCleanInfo	3091
LeadDailyMetric	3106
LeadMonthlyMetric	3113
LeadOwnerSharingRule	3120
LeadShare	3122
LeadStatus	3125
LeadTag	3126
LearningContent	3128
LearningItem	3130
LearningItemAssignment	3133
LearningItemProgress	3137
LearningItemSubmission	3139
LearningItemType	3141
LearningPractice	3145
LegalEntity	3148
LicenseDefinitionCustomPermission (Developer Preview)	3150
LightningErrorEventLog	3151
LightningExperienceTheme	3159
LightningLoggerEventLog	3161
LightningOnboardingConfig	3168
LightningPageViewEventLog	3170
LightningPrfmEventLog	3180
LightningToggleMetrics	3187
LightningUsageByAppTypeMetrics	3188
LightningUsageByBrowserMetrics	3189
LightningUsageByPageMetrics	3190
LightningUsageByFlexiPageMetrics	3192
LightningExitByPageMetrics	3193
LinkedArticle	3194
LinkedArticleFeed	3196
LinkedArticleHistory	3201
ListEmail	3202
ListEmailIndividualRecipient	3212
ListEmailSentResult	3214
ListEmailMonthlyMetric	3219

Contents

ListEmailRecipientSource	3225
ListView	3226
ListViewChart	3228
ListViewChartInstance	3230
LiveAgentSession	3234
LiveAgentSessionHistory	3238
LiveAgentSessionShare	3240
LiveChatBlockingRule	3241
LiveChatObjectAccessConfig	3243
LiveChatObjectAccessDefinition	3245
LiveChatButton	3246
LiveChatButtonDeployment	3259
LiveChatButtonSkill	3260
LiveChatDeployment	3261
LiveChatSensitiveDataRule	3264
LiveChatTranscript	3267
LiveChatTranscriptEvent	3275
LiveChatTranscriptShare	3278
LiveChatTranscriptSkill	3280
LiveChatUserConfig	3281
LiveChatUserConfigProfile	3287
LiveChatUserConfigUser	3288
LiveChatVisitor	3289
Location	3290
LocationGroup	3301
LocationGroupAssignment	3303
LocationShippingCarrierMethod	3305
LocationTrustMeasure	3307
LocWaitlistMsgTemplate	3310
LocationWaitlist	3311
LocationWaitlistedParty	3315
LoginAsEventLog	3318
LoginEvent	3320
LoginEventLog	3320
LoginGeo	3328
LoginHistory	3330
LoginIp	3338
LogoutEventLog	3340
LogoutEventStream	3345
LookedUpFromActivity	3345
Macro	3354
MacroInstruction	3357
MacroUsage	3361
MailmergeTemplate	3365

Contents

MaintenanceAsset	3368
MaintenancePlan	3370
MaintenanceWorkRule	3377
ManagedContent	3381
ManagedContentChannel	3383
ManagedContentInfo	3386
ManagedContentSpace	3386
ManagedContentVariant	3388
MarketingForm	3391
MarketingLink	3395
MatchingRule	3397
MatchingRuleItem	3400
MerchAccPaymentMethodSet	3402
MerchAccPaymentMethodType	3403
MerchantAccount	3406
MerchantAccountEvent	3409
MessagingChannel	3411
MessagingChannelSkill	3418
MessagingChannelUsage	3419
MessagingConfiguration	3423
MessagingDeliveryError	3424
MessagingEndUser	3427
MessagingLink	3433
MessagingSession	3434
MessagingSessionMetrics	3443
MessagingTemplate	3444
MetadataApiOpEventLog	3446
MetadataPackage	3448
MetadataPackageVersion	3450
Metric	3453
MetricDataLink	3457
MigratedEmail	3459
MilestoneType	3459
MktJourneyDcsnSetup	3460
MLField	3461
MLIntentUtteranceSuggestion	3462
MLPredictionDefinition	3463
MLModel	3466
MLModelFactor	3469
MLModelFactorComponent	3471
MLModelMetric	3474
MLRecommendationDefinition	3478
MobileDeviceAppRegistration	3478
MobileSecurityAssignment	3483

Contents

MobileSecurityPolicy	3485
MobileSecurityUserMetric	3490
MobileSettingsAssignment	3490
MobSecurityCertPinConfig	3491
MobSecurityCertPinEvent	3494
MsgChannellLanguageKeyword	3497
MsgChannelUsageExternalOrg	3500
MyDomainDiscoverableLogin	3501
MutingPermissionSet	3504
Name	3506
NamedCredential	3510
NamedCredentialEventLog	3516
NamespaceRegistry	3519
NavigationLinkSet	3520
NavigationMenuItem	3522
NavigationMenuItemLocalization	3525
Network	3527
NetworkActivityAudit	3542
NetworkAffinity	3545
NetworkAuthApiSettings	3545
NetworkDataCategory	3553
NetworkDiscoverableLogin	3554
NetworkEmailTplAllowlist	3556
NetworkFeedResponseMetric	3557
NetworkMember	3559
NetworkMemberGroup	3565
NetworkModeration	3567
NetworkPageOverride	3568
NetworkSelfRegistration	3569
NetworkUserHistoryRecent	3573
Note	3576
NoteAndAttachment	3578
NoteTag	3580
OauthCustomScope	3582
OauthCustomScopeApp	3584
OauthToken	3584
OauthTokenExchangeHandler	3587
OauthTokenExchHandlerApp	3591
ObjectDataImport	3593
ObjectDataImportReference	3595
ObjectMetadataTag	3596
ObjectPermissions	3598
ObjectRelatedUrl	3602
ObjectTerritory2AssignmentRule	3604

Contents

ObjectTerritory2AssignmentRuleItem	3606
ObjectTerritory2Association	3608
ObjectUserTerritory2View	3609
OmniSupervisorConfig	3611
OmniSupervisorConfigAction	3613
OmniSupervisorConfigGroup	3614
OmniSupervisorConfigProfile	3615
OmniSupervisorConfigQueue	3617
OmniSupervisorConfigSkill	3618
OmniSupervisorConfigTab	3619
OmniSupervisorConfigUser	3620
OpenActivity	3621
OperatingHours	3631
OperatingHoursHistory	3633
OperatingHoursHoliday	3635
Opportunity	3636
OpportunityCompetitor	3653
OpportunityContactRole	3654
OpportunityContactRoleSuggestionInsight	3657
OpportunityFieldHistory	3660
OpportunityHistory	3661
OpportunityInsight	3664
OpportunityLineItem	3669
OpportunityLineItemSchedule	3677
OpportunityLineItemSplit	3680
OpportunityOwnerSharingRule	3684
OpportunityPartner	3686
OpportunityRelatedDeleteLog	3688
OpportunityShare	3690
OpportunitySplit	3693
OpportunitySplitType	3697
OpportunityStage	3700
OpportunityTag	3703
OpportunityTeamMember	3704
OpptyLineItemSplitType	3707
Order	3709
OrderAction	3730
OrderAdjustmentGroup	3732
OrderAdjustmentGroupSummary	3737
OrderChangeLog	3741
OrderChgReasonCategMap	3745
OrderDeliveryGroup	3748
OrderDeliveryGroupSummary	3755
OrderDeliveryMethod	3764

Contents

OrderHistory	3767
OrderItem	3768
OrderItemAdjustmentLineItem	3790
OrderItemAdjustmentLineSummary	3795
OrderItemGroup	3799
OrderItemRecipient	3801
OrderItemRelationship	3807
OrderItemSummary	3811
OrderItemSummaryChange	3827
OrderItemSummaryRelationship	3830
OrderItemTaxLineItem	3834
OrderItemTaxLineItemSummary	3837
OrderItemType	3841
OrderOwnerSharingRule	3842
OrderPaymentSummary	3845
OrderPaymentSummaryReference	3851
OrderShare	3854
OrderStatus	3856
OrderSummary	3858
OrderSummaryAdditionalInfo	3877
OrderSummaryRelationship	3880
OrderSummaryRoutingSchedule	3883
Organization	3886
OrgDeleteRequest	3905
OrgEmailAddressSecurity	3907
OrgMetric	3908
OrgMetricScanResult	3910
OrgMetricScanSummary	3913
OrgSnapshot	3916
OrgWideEmailAddress	3919
OSAsyncChgCompletedEvent	3921
OutOfOffice	3926
OutgoingEmail	3928
OutgoingEmailRelation	3928
OwnedContentDocument	3928
OwnerChangeOptionInfo	3931
PackageInstallEventLog	3931
PackageLicense	3935
PackagePushError	3938
PackagePushJob	3940
PackagePushRequest	3944
PackageSubscriber	3948
Participant	3953
Partner	3954

Contents

PartnerFundAllocation	3957
PartnerFundClaim	3959
PartnerFundRequest	3962
PartnerMarketingBudget	3965
PartnerNetworkConnection	3969
PartnerNetworkRecordConnection	3972
PartnerNetworkSyncLog	3975
PartnerRole	3977
PartyConsent	3978
Payment	3982
PaymentAuthAdjustment	3994
PaymentAuthorization	4000
PaymentCredit	4008
PaymentCreditLinePayment	4013
PaymentCreditTransaction	4017
PaymentGateway	4020
PaymentGatewayLog	4025
PaymentGatewayProvider	4031
PaymentGroup	4033
PaymentInitiationSource	4034
PaymentIntent	4040
PaymentIntentEvent	4053
PaymentLineInvoice	4056
PaymentLink	4062
PaymentLinkEvent	4068
PaymentMethod	4069
PymtSchdDistributionMethod	4074
PaymentScheduleTreatmentDtl	4077
PaymentTerm	4080
PaymentTermItem	4082
PaymentSchedule	4085
PaymentScheduleItem	4091
PaymentSchedulePolicy	4097
PaymentScheduleTreatment	4100
PendingOrderSummary	4103
PendingServiceRouting	4109
PendingServiceRoutingInteractionInfo	4117
Period	4119
PermissionSet	4122
PermissionSetAssignment	4128
PermissionSetGroup	4132
PermissionSetGroupComponent	4135
PermissionSetLicense	4136
PermissionSetLicenseAssign	4140

Contents

PermissionSetLicenseDefinition (Developer Preview)	4142
PermissionSetTabSetting	4145
PersnlBatchDecision	4147
PersonAccountOwnerPowerUser	4149
PersonalOrgInfo	4151
PersonalizationDecision	4155
PersonalizationObjective	4158
PersonalizationPoint	4160
PersonalizationSchema	4165
PersonalizationTargetInfo	4167
PermissionUpdateEventLog	4169
PersonTraining	4172
PicklistValueInfo	4174
PickTicket	4176
PickTicketAssignment	4179
PickTicketProduct	4181
PipelineInspectionListView	4183
PipelineInspectionSumField	4188
PipelineInspMetricConfig	4189
PipelineInspMetricConfigLocalization	4191
PlatformAction	4192
PlatformEventUsageMetric	4199
PlatformStatusAlertEvent	4203
PortalDelegablePermissionSet	4204
PresenceConfigDeclineReason	4205
PresenceDeclineReason	4206
PresenceUserConfig	4207
PresenceUserConfigProfile	4212
PresenceUserConfigUser	4213
PriceAdjustmentGroupShape	4214
PriceAdjustmentItemShape	4216
PriceAdjustmentSchedule	4220
PriceAdjustmentTier	4224
Pricebook2	4226
Pricebook2History	4230
PricebookEntry	4232
PricebookEntryAdjustment	4236
PriceProtectionExecution	4237
PriceProtectExecLineItem	4240
PriceProtectionTerm	4246
PrivacyHold	4248
PrivacyHoldReason	4251
PrivacyJobSession	4253
PrivacyObjectSession	4258

Contents

PrivacyRequest	4263
PrivacyRTBFRequest	4266
PrivacySessionRecordFailure	4268
Problem	4270
ProblemIncident	4276
ProblemRelatedItem	4278
ProcessDefinition	4280
ProcessException	4282
ProcessFlowMigration	4288
ProcessInstance	4294
ProcessInstanceHistory	4298
ProcessInstanceNode	4303
ProcessInstanceStep	4306
ProcessInstanceWorkitem	4309
ProcessNode	4312
ProducerCommission	4313
Product2	4319
Product2DataTranslation	4330
ProductAttribute	4332
ProductAttributeSet	4333
ProductAttributeSetItem	4335
ProductAttributeSetProduct	4336
ProductCatalog	4337
ProductCategory	4340
ProductCategoryProduct	4343
ProductCategoryDataTranslation	4345
ProductComponentGroup	4347
ProductConsumed	4349
ProductDetectedPriceChange	4353
ProductEntitlementTemplate	4356
ProductFeaturedProduct	4357
ProductItem	4359
ProductItemTransaction	4362
ProductMedia	4365
ProgramProduct	4368
ProductQuantityRule	4370
ProductRelatedComponent	4371
ProductRelationshipType	4377
ProductRequest	4379
ProductRequestLineItem	4385
ProductRequired	4393
ProductSellingModel	4396
ProductSellingModelOption	4398
ProductServiceCampaign	4401

Contents

ProductServiceCampaignItem	4404
ProductServiceCampaignItemStatus	4407
ProductServiceCampaignStatus	4408
ProductTransfer	4410
ProductWarrantyTerm	4417
Profile	4419
ProfileSkill	4423
ProfileSkillEndorsement	4425
ProfileSkillShare	4426
ProfileSkillUser	4428
ProgramRebateType	4430
Promotion	4436
PromotionLineItemRule	4443
PromotionMarketSegment	4445
PromotionQualifier	4448
PromotionSegment	4452
PromotionSegmentBuyerGroup	4454
PromotionSegmentSalesStore	4457
PromotionTarget	4459
PromotionTier	4465
Prompt	4467
PromptAction	4469
PromptError	4473
PromptActionOwnerSharingRule	4475
PromptActionShare	4476
PromptLocalization	4478
PromptVersion	4480
PromptVersionLocalization	4491
Prospect	4493
ProspectingAgentDataSource	4500
ProspectingAgentRcmdTarget	4500
ProspectingAgentSpec	4501
ProspectingAgentSpecParm	4501
ProspectingAgentUserSpec	4502
ProrationPolicy	4502
PublicComplaint	4504
PurchaseQuantityRule	4514
PushTopic	4517
PushUpgradeCustomization	4520
QueuedExecutionEventLog	4521
QueueRoutingConfig	4525
Question	4528
QuestionDataCategorySelection	4533
QuestionReportAbuse	4535

Contents

QuestionSubscription	4536
QueueSubject	4537
QuickText	4539
QuickTextUsage	4542
Quote	4546
QuoteAction	4562
QuoteAdjustmentGroup	4565
QuoteDocument	4568
QuoteLineGroup	4570
QuoteLineItem	4572
QuoteLineItemRecipient	4595
QuoteLinePriceAdjustment	4600
QuoteLineRelationship	4604
QuoteItemTaxItem	4609
QuoteLineWorkSource	4611
QuoteRecipientGroup	4613
QuoteRecipientGroupMember	4615
RecentFieldChange	4617
RecentlyViewed	4619
Recommendation	4624
RecommendationResponse	4627
RecordAction	4630
RecordActionHistory	4636
RecordsetFilterCriteria	4639
RecordsetFilterCriteriaRule	4643
RecordsetFilterCriteriaMonitor	4646
RecordType	4648
RecordTypeLocalization	4651
RecordVisibility (Pilot)	4653
RedirectWhitelistUrl	4654
Refund	4657
RefundLinePayment	4666
RegisteredExternalService	4671
RelatedListColumnDefinition	4676
RelatedListDefinition	4678
RemoteKeyCalloutEvent	4681
Reply	4681
ReplyEmailSettings	4684
ReplyReportAbuse	4686
ReplyText	4687
Report	4689
ReportEventLog	4693
ReportExportEventLog	4701
ReportTag	4703

Contents

ReputationLevel	4704
ReputationLevelLocalization	4706
ReputationPointsRule	4707
ResourceAbsence	4709
ResourcePreference	4713
RestApiEventLog	4716
RetentionStoreUsage	4721
ReturnOrder	4724
ReturnOrderItemAdjustment	4740
ReturnOrderItemTax	4743
ReturnOrderLineItem	4746
ReturnOrderOwnerSharingRule	4757
RevenueAsyncOperation	4759
RevenueTransactionErrorLog	4764
RpaFlowResultEvent	4769
RpaRobot	4769
RpaRobotAsgnMaintWindow	4769
RpaRobotAsgnSessionInf	4769
RpaRobotDefinition	4769
RpaRobotMaintWindow	4769
RpaRobotMaintWindowDef	4769
RpaRobotPool	4769
RpaRobotPoolAsgnRobot	4769
RpaRobotPoolDefinition	4769
RpaRobotPoolFlowAsgn	4770
RpaRobotSessionInfo	4770
RpaRobotSessionInfoDef	4770
RuleTerritory2Association	4770
SalesAIScoreCycle	4771
SalesAIScoreModelFactor	4772
SalesforceLoginAsEventLog	4775
SalesChannel	4777
SalesforceContract	4779
SalesforceInvoice	4786
SalesforcePayment	4789
SalesforceQuote	4790
SalesStoreCatalog	4792
SalesTransactionItemShape	4793
SalesTransactionShape	4803
SalesTransactionType	4805
SalesTrxnItemRelationShape	4806
SalesTrxnItemRelationship	4810
SalesWorkQueueSettings	4813
SandboxStatusEventLog	4814

Contents

SamISsoConfig	4816
SavedPaymentMethod	4823
SavedPaymentMethodEvent	4832
SchedulingAdherenceDetail	4834
SchedulingAdherenceSummary	4835
SchedulingConstraint	4840
SchedulingObjective	4843
SchedulingRule	4844
SchedulingRuleParameter	4846
Scontrol	4848
ScontrolLocalization	4851
Scorecard	4857
ScorecardAssociation	4859
ScorecardMetric	4861
ScoreIntelligence	4863
ScratchOrgInfo	4863
SearchActivity	4871
SearchClickEventLog	4874
SearchEventLog	4875
SearchLayout	4877
SearchPromotionRule	4880
SecurityCustomBaseline	4881
SelfServiceUser	4882
Seller	4886
SenderEmailAddress	4888
ServiceAppointment	4890
ServiceAppointmentStatus	4902
ServiceChannel	4904
ServiceChannelFieldPriority	4909
ServiceChannelStatus	4910
ServiceChannelStatusField	4911
ServiceContract	4912
ServiceContractOwnerSharingRule	4920
ServiceCrew	4922
ServiceCrewMember	4924
ServiceCrewOwnerSharingRule	4926
ServicePresenceStatus	4928
ServiceReport	4929
ServiceReportLayout	4933
ServiceRequest	4935
ServiceResource	4940
ServiceResourceCapacity	4945
ServiceResourceCapacityHistory	4948
ServiceResourceDataTranslation	4949

Contents

ServiceResourceOwnerSharingRule	4950
ServiceResourcePreference	4952
ServiceResourceSkill	4955
ServiceSetupProvisioning	4957
ServiceTerritory	4959
ServiceTerritoryDataTranslation	4965
ServiceTerritoryLocation	4967
ServiceTerritoryMember	4968
ServiceTerritoryWorkType	4973
SessionPermSetActivation	4976
SetupAssistantStep	4979
SetupAuditTrail	4979
SetupEntityAccess	4981
ShapeRepresentation	4984
SharingRecordCollection	4985
SharingRecordCollectionItem	4987
SharingRecordCollectionMember	4988
Shift	4989
ShiftHistory	4994
ShiftOwnerSharingRule	4996
ShiftPattern	4998
ShiftPatternEntry	5000
ShiftSegment	5002
ShiftSegmentType	5004
ShiftShare	5006
ShiftStatus	5008
ShiftTemplate	5010
Shipment	5013
ShipmentItem	5023
ShippingCarrier	5026
ShippingCarrierMethod	5034
ShippingConfigurationSet	5038
ShippingConfigSetProduct	5039
ShippingRateArea	5041
ShippingRateGroup	5042
SignupRequest	5043
Site	5051
SiteDetail	5061
SiteDomain	5062
SiteEventLog	5063
SiteHistory	5069
SiteIframeWhitelistUrl	5070
SiteRedirectMapping	5071
Skill	5073

Contents

SkillLevelDefinition	5075
SkillLevelProgress	5077
SkillProfile	5080
SkillRequirement	5081
SkillUser	5084
SlackChannelRelatedRecord	5085
SlaProcess	5086
Snippet	5090
SnippetAssignment	5092
SoapApiEventLog	5092
SocialPersona	5098
SocialPost	5104
Solution	5117
SolutionStatus	5121
SolutionTag	5123
SOSDeployment	5124
SOSSession	5126
SOSSessionActivity	5130
StagedEmail	5131
StagedInviteeEmail	5131
StagedUnmtchdEmailAddr	5132
StagedUnmtchdEmailAddrRela	5134
Stamp	5136
StampAssignment	5137
StandardInvocableActionType	5138
StandardShippingRate	5139
StaticResource	5142
StoreIntegratedService	5145
StreamingChannel	5146
Salesforce Surveys Object Model	5149
Survey	5149
SurveyEmailBranding	5152
SurveyEngagementContext	5155
SurveyInvitation	5156
SurveyPage	5161
SurveyQuestion	5162
SurveyQuestionChoice	5166
SurveyQuestionResponse	5167
SurveyQuestionScore	5170
SurveyResponse	5174
SurveySubject	5182
SurveyVersion	5185
SurveyVersionAddlInfo	5187
SvcCatalogCategory	5193

Contents

SvcCatalogCategoryItem	5195
SvcCatalogFilterCriteria	5197
SvcCatalogItemDef	5200
SvcCatalogRequest	5204
SvcCatalogReqRelatedItem	5209
Swarm	5210
SwarmMember	5215
TabDefinition	5218
TagDefinition	5220
Task	5222
TaskPriority	5236
TaskRelation	5238
TaskStatus	5240
TaskTag	5241
TaskWhoRelation	5243
TaxEngine	5244
TaxEngineInteractionLog	5249
TaxEngineProvider	5254
TaxGeoConfig	5255
TaxPolicy	5258
TaxRate	5260
TaxTreatment	5263
TenantScrAPIPrmptInjection	5266
TenantSecret	5269
TenantSecurityAPIGatewayUsage	5275
TenantSecurityAlertRuleSelectedTenant	5279
TenantSecurityApiAnomaly	5280
TenantSecurityCertificate	5284
TenantSecurityConnectedApp	5288
TenantSecurityConfigAgent	5291
TenantSecurityCredentialStuffing	5294
TenantSecurityCustomMetricSetup	5298
TenantSecurityCustomMetricDetail	5300
TenantSecurityCustomMetricStat	5302
TenantSecurityEncryptedField	5304
TenantSecurityGuestUserAnomaly	5307
TenantSecurityEncryptionPolicy	5310
TenantSecurityFeature	5313
TenantSecurityHealthCheckBaselineTrend	5315
TenantSecurityHealthCheckDetail	5318
TenantSecurityHealthCheckTrend	5321
TenantSecurityLicense	5324
TenantSecurityLogin	5327
TenantSecurityLoginIpRangeTrend	5330

Contents

TenantSecurityMobilePolicyTrend	5333
TenantSecurityMonitorMetric	5337
TenantSecurityNotification	5339
TenantSecurityNotificationRule	5342
TenantSecurityMetricDetailLink	5345
TenantSecurityPackage	5346
TenantSecurityPolicy	5349
TenantSecurityPolicyDeployment	5352
TenantSecurityPolicySelectedTenant	5354
TenantSecurityReportAnomaly	5355
TenantSecuritySessionHijacking	5359
TenantSecurityTenantInfo	5364
TenantSecurityTransactionPolicyTrend	5367
TenantSecurityTrigTransactionSecurityPol	5370
TenantSecurityTrustedIpRangeTrend	5375
TenantSecurityUserActivity	5378
TenantSecurityUserPerm	5381
TenantUsageEntitlement	5384
Territory	5387
TerritoryMgmtObjectConfig	5390
Territory2	5392
Territory2AlignmentLog	5395
Territory2Model	5397
Territory2ModelHistory	5399
Territory2ObjectExclusion	5401
Territory2ObjSharingConfig	5402
Territory2Type	5403
TerritoryAdminAssignment	5405
TestSuiteMembership	5407
ThirdPartyAccountLink	5408
ThreatDetectionFeedback	5412
TimeSheet	5414
TimeSheetEntry	5417
TimeSlot	5421
TimeSlotHistory	5424
TodayGoal	5425
Topic	5427
TopicAssignment	5429
TopicLocalization	5431
TopicUserEvent	5437
TopInsight	5439
TransactionSecurityPolicy	5439
TransactionSecurityEventLog	5444
Translation	5449

Contents

TravelMode	5450
TwoFactorInfo	5452
TwoFactorMethodsInfo	5453
TwoFactorTempCode	5457
UiAgentInteractionEventLog	5458
UiFormulaCriterion	5466
UiFormulaRule	5467
UiTelemetryNavTmEventLog	5469
UiTelemetryRsrcTmEventLog	5482
UndecidedEventRelation	5493
UnifiedActivity	5495
UnifiedActivityInsight	5497
UnifiedActivityParticipant	5499
UnifiedActivityRelation	5501
UnifiedActvtyInsightKeyword	5502
UnifiedEmail	5503
UnifiedEmailParticipant	5506
UnifiedMeeting	5508
UnifiedMeetingParticipant	5510
UnifiedTask	5512
UnifiedTaskParticipant	5514
UnifiedVideoCall	5516
UnifiedVideoCallParticipant	5518
UnifiedVoiceCall	5520
UnifiedVoiceCallParticipant	5523
UnitOfMeasure	5525
UriEventLog	5528
UsageImpactFactor	5532
UsageImpactGroup	5534
UsageImpactGroupFactor	5535
UsageImpactGroupPgmMeasure	5538
UsageImpactGroupVersion	5540
User	5543
UserAccessChange	5587
UserAccessPolicy	5587
UserAccountTeamMember	5590
UserAppInfo	5593
UserAppMenuCustomization	5594
UserAppMenuItem	5596
UserAuthCertificate	5599
UserConfigTransferButton	5602
UserConfigTransferSkill	5603
UserCustomBadge	5603
UserCustomBadgeLocalization	5604

Contents

UserDailyMetric	5606
UserDailyMetricOwnerSharingRule	5615
UserDefinedLabel	5616
UserDefinedLabelAssignment	5618
UserDevice	5620
UserDeviceApplication	5623
UserDeviceHistory	5625
UserEmailCalendarSync	5628
UserEmailPreferredPerson	5629
UserEmailPreferredPersonShare	5631
UserLicense	5633
UserListView	5636
UserListViewCriterion	5638
UserLocationAssignment	5639
UserLogin	5641
UserMembershipSharingRule	5642
UserMonthlyMetric	5644
UserMonthlyMetricOwnerSharingRule	5655
UserPackageLicense	5657
UserPermissionAccess	5659
UserPrioritizedRecord	5660
UserPreference	5661
UserProfile	5664
UserProvAccount	5682
UserProvAccountStaging	5685
UserProvMockTarget	5689
UserProvisioningConfig	5690
UserProvisioningLog	5694
UserProvisioningRequest	5697
UserRecordAccess	5703
UserRelatedRecordContent	5706
UserRole	5707
UserServicePresence	5711
UserSetupEntityAccess	5715
UserShare	5717
UserSharedFeature	5719
UserTeamMember	5719
UserTerritory	5721
UniqueQueryEventLog	5722
UserTerritory2Association	5725
UserTerritory2AssocLog	5726
UserUIPreference	5728
UserWorkList	5730
UserWorkListItem	5731

Contents

VendorCallCenterStatusMap	5732
VerificationHistory	5733
VisualforceAccessMetrics	5740
VisualforceRequestEventLog	5742
VideoCall	5748
VideoCallInsight	5755
VideoCallInsightAction	5758
VideoCallInsightReason	5761
VideoCallParticipant	5762
VideoCallRecording	5765
VideoCallRecordingStructure	5769
VoiceCall	5771
VoiceCallInsight	5787
VoiceCallInsightAction	5790
VoiceCallInsightReason	5793
VoiceCallMetrics	5794
VoiceCallList	5799
VoiceCallListItem	5800
VoiceCallQualityFeedback	5801
VoiceCallRecording	5803
VoiceCoaching	5806
VoiceLocalPresenceNumber	5807
VoiceMailContent	5808
VoiceMailGreeting	5809
VoiceMailMessage	5811
VoiceOrgSetting	5812
VoiceUserLine	5818
VoiceUserPreferences	5820
VoiceVendorInfo	5821
VoiceVendorLine	5823
Vote	5825
WarrantyTerm	5828
WaveAutoInstallRequest	5833
WebCart	5837
WebCartAdjustmentBasis	5849
WebCartAdjustmentGroup	5851
WebCartHistory	5854
WebLink	5856
WebLinkLocalization	5861
WebStore	5867
WebstoreBuyerGroup	5877
WebStoreCatalog	5879
WebStoreInventorySource	5881
WebStoreMessageContent	5884

Contents

WebStoreNetwork	5886
WebStorePricebook	5888
WebStoreSearchProdSettings	5890
WebStoreShare	5891
Wishlist	5894
WishlistItem	5896
WorkAccess	5897
WorkAccessShare	5898
WorkBadge	5900
WorkBadgeDefinition	5904
WorkCapacityAvailability	5908
WorkCapacityLimit	5910
WorkCapacityUsage	5917
WorkCoaching	5924
WorkDemographic	5926
WorkFeedback	5928
WorkFeedbackQuestion	5930
WorkFeedbackQuestionSet	5932
WorkFeedbackRequest	5934
WorkforceCapacity	5939
WorkforceCapacityUnit	5942
WorkGoal	5947
WorkGoalCollaborator	5954
WorkGoalCollaboratorHistory	5955
WorkGoalHistory	5957
WorkGoalLink	5958
WorkGoalShare	5959
Workload	5961
WorkloadUnit	5963
WorkOrder	5966
WorkOrderHistory	5983
WorkOrderLineItem	5984
WorkOrderLineItemHistory	5998
WorkOrderLineItemStatus	6000
WorkOrderShare	6001
WorkOrderStatus	6003
WorkPerformanceCycle	6005
WorkPlan	6008
WorkPlanSelectionRule	6011
WorkPlanTemplate	6014
WorkPlanTemplateEntry	6016
WorkReward	6018
WorkRewardFund	6020
WorkRewardFundType	6023

Contents

WorkStep 6026

WorkStepStatus 6031

WorkStepTemplate 6032

WorkThanks 6034

WorkType 6036

WorkTypeGroup 6041

WorkTypeGroupMember 6043

Chapter 7: Data Model 6046

INDEX 6047

CHAPTER 1 Overview of Salesforce Objects and Fields

In this chapter ...

- [Salesforce Objects Release Notes](#)
- [Primitive Data Types](#)
- [Field Types](#)
- [API Field Properties](#)
- [Required Fields](#)
- [System Fields](#)
- [Frequently Occurring Fields](#)
- [Compound Fields](#)
- [Custom Objects](#)
- [Custom Fields](#)
- [AppExchange Object Prefixes and the API](#)
- [Relationships Among Standard Objects and Fields](#)
- [Factors that Affect Data Access](#)
- [Field and Type Differences in Salesforce Apps and APIs](#)
- [External Objects](#)
- [Big Objects](#)
- [Object Interfaces](#)

Salesforce objects and fields are analogous to database tables and the table columns. Objects and fields structure data. For example, the central object in the Salesforce data model represents accounts—companies and organizations involved with your business, such as customers, partners, and competitors.

The term “record” describes a particular occurrence of an object (such as a specific account like “IBM” or “United Airlines” that is represented by an Account object). A record is analogous to a row in a database table.

Objects already created for you by Salesforce are called standard objects. Objects that you create in your organization with the user interface or with the Metadata API are called custom objects. Objects you create that map to data stored outside your organization are called external objects.

While this document describes all of the objects available in the API, your applications work with only the objects that you are authorized to access. Programmatic access to objects is determined by the objects defined in your organization, your organization configuration, your user permissions and access settings (which are configured by your organization’s Salesforce admin), your data sharing model, and other factors related specifically to the object.

Most of the objects accessible through the API are read-write objects. However, there are a few objects that are read-only. This fact is noted in the description for the object.

For details about the data types and size restrictions for each object’s fields, see the [Salesforce Field Reference Guide](#).

Salesforce Objects Release Notes

Use the Salesforce Release Notes to learn about the most recent updates and changes to Salesforce Objects.

For information on updates to Salesforce Objects with broad availability, see [New and Changed Objects](#) in the Salesforce Release Notes.

For changes to objects with limited availability, see the release notes for each product area. Browse all of the most recent [Salesforce Release Notes](#).

Primitive Data Types

The API uses the following primitive data types:

Value	Details
base64	Base 64-encoded binary data. Fields of this type are used for storing binary files in Attachment records, Document records, and Scontrol records. In these objects, the <code>Body</code> or <code>Binary</code> field contains the (base64 encoded) data, while the <code>BodyLength</code> field defines the length of the data in the <code>Body</code> or <code>Binary</code> field. In the Document object, you can specify a URL to the document instead of storing the document directly in the record.
boolean	Boolean fields have one of these values: <code>true</code> (or 1), or <code>false</code> (or 0).
byte	A set of bits.
date	Date data. Fields of this type contain date values, such as <code>ActivityDate</code> in the Event object. Unlike <code>dateTime</code> fields, date fields contain no time value—the time portion of a date field is not relevant and is always set to midnight in the Coordinated Universal Time (UTC) time zone. If you specify a date value in a query, you can filter on date fields only.
dateTime	Date/time values (timestamps). Fields of this type handle date/time values (timestamps), such as <code>ActivityDateTime</code> in the Event object or the <code>CreatedDate</code>, <code>LastModifiedDate</code>, or <code>SystemModstamp</code> in many objects. Regular <code>dateTime</code> fields are full timestamps with a precision of one second. They are always transferred in the Coordinated Universal Time (UTC) time zone. In your client application, you might need to translate the timestamp to or from a local time zone. If you specify a <code>dateTime</code> value in a query, you can filter on <code>dateTime</code> fields only. Development tools differ in the way that they handle time data. Some development tools report the local time, while others report only the Coordinated Universal Time (UTC) time zone. To determine how your development tool handles time values, refer to its documentation. The Event object has a <code>DurationInMinutes</code> field that specifies the number of minutes for an event. Even though this is a temporal value, it is an integer type—not a <code>dateTime</code> type.
double	Double values. Fields of this type can contain fractional portions (digits to the right of the decimal place), such as <code>ConversionRate</code> in <code>CurrencyType</code>. In the API, all non-integer values (such as Currency Field Type and Percent Field Type) contain values of type double. Some restrictions may be applied to double values: • <code>scale</code>: Maximum number of digits to the right of the decimal place. • <code>precision</code>: Total number of digits, including those to the left and the right of the decimal place

Value	Details
	The maximum number of digits to the left of the decimal place is equal to <code>precision</code> minus <code>scale</code>. In the Salesforce user interface, precision is defined differently—it is the maximum number of digits allowed to the left of the decimal place. Values can be stored in scientific notation if the number is large enough (or, for negative numbers, small enough), as indicated by the W3C XML Schema Part 2: Datatypes Second Edition specification. When the user sets the precision in custom fields in the Salesforce application, it displays the precision set by the user, even if the user enters a more precise value than defined for those fields. However, when you set the precision in custom fields using the API, no rounding occurs when the user retrieves the number field.
int	Fields of this type contain numbers with no fractional portion (digits to the right of a decimal place), such as the <code>NumberOfEmployees</code> in an Account. For integer fields, <code>digits</code> specifies the maximum number of digits that an int can have.
long	Large integers. They are similar to the int type but can hold a wider range of numbers. The smallest possible value for long is -9223372036854775808 and the largest possible value is 9223372036854775807. For long fields, <code>digits</code> specifies the maximum number of digits that the number can have.
string	Character strings. Fields that are of data type <code>string</code> contain text and some have length restrictions depending on the data being stored. For example, in the Contact object, the <code>FirstName</code> field is 40 characters, the <code>LastName</code> field is 80 characters, the <code>MailingStreet</code> is 255 characters. For fields that contain strings, behavior is different beginning with API version 15.0. In API versions previous to 15.0, if you specify a value for a field, and that value is too large, the value is truncated. For API version 15.0 and later, if a value is specified that is too large, the operation fails and the fault code <code>STRING_TOO_LONG</code> is returned. <code>AllowFieldTruncationHeader</code> allows you to specify that the previous behavior, truncation, be used instead of the new behavior in API versions 15.0 and later. This header has no effect in versions 14.0 and earlier. The affected fields are: <code>anyType</code>, <code>email</code>, <code>encryptedstring</code>, <code>multipicklist</code>, <code>phone</code>, <code>picklist</code>, <code>string</code>, and <code>textarea</code>.
time	Time values. Fields of this type handle time values, such as <code>FridayEndTime</code> in the BusinessHours object, with a precision of one millisecond. Development tools differ in the way that they handle time data. Some development tools report the local time, while others report only the Coordinated Universal Time (UTC) time zone. To determine how your development tool handles time values, refer to its documentation.

These data types are used in the SOAP messages that are exchanged between your client application and the API. When writing your client application, follow the data typing rules defined for your programming language and development environment. Your development tool handles the mapping of typed data in your programming language with these SOAP data types.

The primitive data types are:

- specified in the World Wide Web Consortium's publication *XML Schema Part 2: Data Types* at the following URL: <http://www.w3.org/TR/xmlschema-2/>.
- enumerated in the `SOAPType` field of the Field type, which is described in the `fields` property of the DescribeObjectResult.

Primitive types are used as a standardized way to define, send, receive, and interpret basic data types in the SOAP messages exchanged between client applications and the API. In addition, primitive data types are interpreted in a Salesforce-specific way, which is useful for display formatting and for numeric conversion (adding values of different currencies).

For example, Salesforce chooses to interpret a double value passed via SOAP as a `double` in a number of possible ways, depending on the field definition. If the field type for that data is currency, Salesforce handles the display of the data by prepending it with a currency symbol and inserting a decimal for precision. Similarly, if the field type is percent, Salesforce handles the display of the data by appending a percent sign (%). Regardless of the field type, however, the value is sent in the SOAP message as a double.

The API uses data types called field types that are defined in the WSDLs. For more information, see [Field Types](#).

Field Types

In addition to the primitive data types, the API defines the following data types for fields.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.



Note: For fields that contain strings, behavior is different beginning with API version 15.0. In API versions previous to 15.0, if you specify a value for a field, and that value is too large, the value is truncated. For API version 15.0 and later, if a value is specified that is too large, the operation fails and the fault code `STRING_TOO_LONG` is returned. `AllowFieldTruncationHeader` allows you to specify that the previous behavior, truncation, be used instead of the new behavior in API versions 15.0 and later. This header has no effect in versions 14.0 and earlier. The affected fields are: `anyType`, `email`, `encryptedstring`, `multipicklist`, `phone`, `picklist`, `string`, and `textarea`.

Field Type	What the Field Contains
address	A compound data type that contains address field data.
anyType	Polymorphic data type that returns string, picklist, reference, Boolean, currency, int, double, percent, ID, date, datetime, url, or email data depending on the kind of field involved. See AnyType Field Type .
calculated	Fields that are defined by a formula. See Calculated Field Type .
combobox	A combobox, which includes a set of enumerated values and allows the user to specify a value not in the list. See ComboBox Field Type .
currency	Currency values. See Currency Field Type .
DataCategoryGroupReference	Reference to a data category group or a category unique name. See DataCategoryGroupReference Field Type .
email	Email addresses. See Email Field Type .
encryptedstring	Encrypted text fields contain any combination of letters, numbers, or symbols that are stored in encrypted form. You can set a maximum length of up to 175 characters. Available in API versions 11.0 and later.
floatarray	Reserved for future use.
ID	Primary key field for the object. See ID Field Type . Most Web services tools, including .NET and WSC, map the ID simple type defined in the API WSDL (Enterprise or Partner) to a string. However, other tools generate a specific ID class to represent the ID simple type. Consult your Web services toolkit documentation for more information.

Field Type	What the Field Contains
JunctionIdList	A string array of referenced ID values that represent the many-to-many relationship of an underlying junction entity. Query and manipulate the string array to query and manipulate the underlying junction entities in a single API call. See JunctionIdList Field Type . Adding a <code>JunctionIdList</code> field name to the <code>fieldsToNull</code> property deletes all related junction records. This action can't be undone.
location	A compound data type that contains latitude and longitude values for geolocation fields.
masterrecord	When records are merged, the ID of the record that is saved (the other records are deleted).
multipicklist	Multi-select picklists, which include a set of enumerated values from which multiple values can be selected. See Multi-Select Picklist Field Type .
percent	Percentage values. See Percent Field Type .
phone	Phone numbers. Values can include alphabetic characters. Client applications are responsible for phone number formatting. See Phone Field Type .
picklist	Picklists, which include a set of enumerated values from which one value can be selected. See Picklist Field Type .
reference	Cross-references to a different object. Analogous to a foreign key field in SQL. See Reference Field Type .
textarea	String that's displayed as a multiline text field. See Textarea Field Type .
textarray	Reserved for future use.
url	URL values. Client applications commonly display URLs as hyperlinks. See URL Field Type .

These field types extend [primitive data types](#). Many of these field types follow common data typing conventions that are made explicit in their metadata. However, certain field types have unique characteristics that you must understand before using them in your client application.

These field types apply to both standard and custom fields. They're enumerated in the `type` field of the [Field Types](#) type, which is described in the `fields` property of the `DescribeObjectResult`.



Note: Some numeric fields have precision and scale limits. In addition, certain text fields have length restrictions. These restrictions are enforced when you `create()` or `update()` objects. However, the API can return data that doesn't meet these restrictions.

AnyType Field Type

The `anyType` field type is dynamic and returns `string`, `date`, `number`, or `boolean` data depending on the kind of field involved. For example, the element in a SOAP message has an `xsi:type="xsd:string"` attribute if the field is of type `string`. This field type is used in history objects for the `NewValue` and `OldValue` fields. It's also a valid field type for `fieldType` and `soapType`.



Note: Most SOAP toolkits automatically deserialize this element into the correct native type.

Calculated Field Type

Calculated fields are read-only fields in the API. These fields are defined by a formula, which is an algorithm that derives its value from other fields, expressions, or values. You can filter on these fields in SOQL, but you don't replicate these fields. The length of text calculated fields is 3,900 characters or less—anything longer is truncated.

Calculated fields are called formula fields in the Salesforce user interface.

ComboBox Field Type

A combobox is a picklist that also allows users to type a value that isn't already specified in the list. A combobox is defined as a string value.

Currency Field Type

Currency fields contain currency values, such as the `ExpectedRevenue` field in a Campaign, and are defined as type `double`.

For orgs that have the multicurrency option enabled, the `CurrencyIsoCode` field is defined for any object that can have currency fields. The `CurrencyIsoCode` field and currency fields are linked in a special way. On any specific record, the `CurrencyIsoCode` field defines the currency of that record. Therefore, the values of all currency fields on that record are expressed in that currency.

For most cases, clients don't need to consider the linking of the `CurrencyIsoCode` field and the currency fields on an object. However, consider these points.

- The `CurrencyIsoCode` field exists only for those orgs that have enabled multicurrency support.
- When you display the currency values in a user interface, it's recommended that you prepend each currency value with its `CurrencyIsoCode` value and a space separator.
- The `CurrencyIsoCode` field is a restricted picklist field. The set of allowable values, defined in the `CurrencyType` object, can vary from org to org. Attempting to set it to a value that isn't defined for an org causes the operation to be rejected.
- If you update the `CurrencyIsoCode` field on an object, it implicitly converts all currency values on that object to the new currency code. The field uses the conversion rates that are defined for that org in the Salesforce user interface. If you specify currency values in that same `update()` call, the new currency values you specify are interpreted in the new `CurrencyIsoCode` field value, without conversion.
- The picklist values in a `CurrencyIsoCode` field don't exactly match the labels displayed in Salesforce.

To perform currency conversions, client applications can look up the `CurrencyIsoCode` in the `CurrencyType` object.

DataCategoryGroupReference Field Type

A data category group has categories that classify articles in Salesforce Knowledge and questions in the Answers feature. Every article and question object has two fields of type `DataCategoryGroupReference` which contain the category group and category unique name. You can use the `describeDataCategoryGroups()` and `describeDataCategoryGroupStructures()` calls to retrieve the category groups and categories related to these objects.

Email Field Type

Email fields contain email addresses. Client applications are responsible for specifying valid and properly formatted email addresses in `create()` and `update()` calls.

ID Field Type

With rare exceptions, all objects in the API have a field of type ID. The field is named `Id` and contains a unique identifier for each record in the object. It's analogous to a primary key in relational databases. When you `create()` a new record, the Web service generates an ID value for the record, ensuring that it's unique within your org's data. You can't use the `update()` call on ID fields. Because the ID value stays constant over the lifetime of the record, you can refer to the record by its ID value in subsequent API calls. Also, the ID value contains a three-character code that identifies the object type, which client applications can retrieve via the `describeSObjects()` call.

In addition, certain objects, including custom objects, have one or more fields of type `reference` that contain the ID value for a related record. These fields have names that end in the suffix "Id", for example, `OwnerId` in the account object. `OwnerId` contains the ID of the user who owns that object. Unlike the field named `Id`, `reference` fields are analogous to foreign keys and can be changed via the `update()` call.


Some API calls, such as `retrieve()` and `delete()`, accept an array of IDs as parameters—each array element uniquely identifies the row to retrieve or delete. Similarly, the `update()` call accepts an array of `sObject` records—each `sObject` contains an `Id` field that uniquely identifies the `sObject`.

 **Note:** Most Web services tools, including .NET and WSC, map the ID simple type defined in the API WSDL (Enterprise or Partner) to a string. However, other tools generate a specific ID class to represent the ID simple type. Consult your web services toolkit documentation for more information.


Salesforce IDs are often represented by 15-character, base-62, strings. Each of the 15 characters can be a numeric digit (0-9), a lowercase letter (a-z), or an uppercase letter (A-Z). These 15-character IDs are *case-sensitive*. To Salesforce, `000000000000Abc` isn't the same as `000000000000aBC`.

Don't use 15-character IDs in case-insensitive applications like Microsoft Access™. These applications incorrectly consider `000000000000Abc` to be the same as `000000000000aBC`.

To avoid these issues, all API calls return an 18-character ID that's *case-safe*, meaning that it's compared correctly by case-insensitive applications. The extra 3 characters at the end of the ID encode the case of the preceding 15 characters. Use 18-character IDs in all API calls when creating, editing, or deleting data.

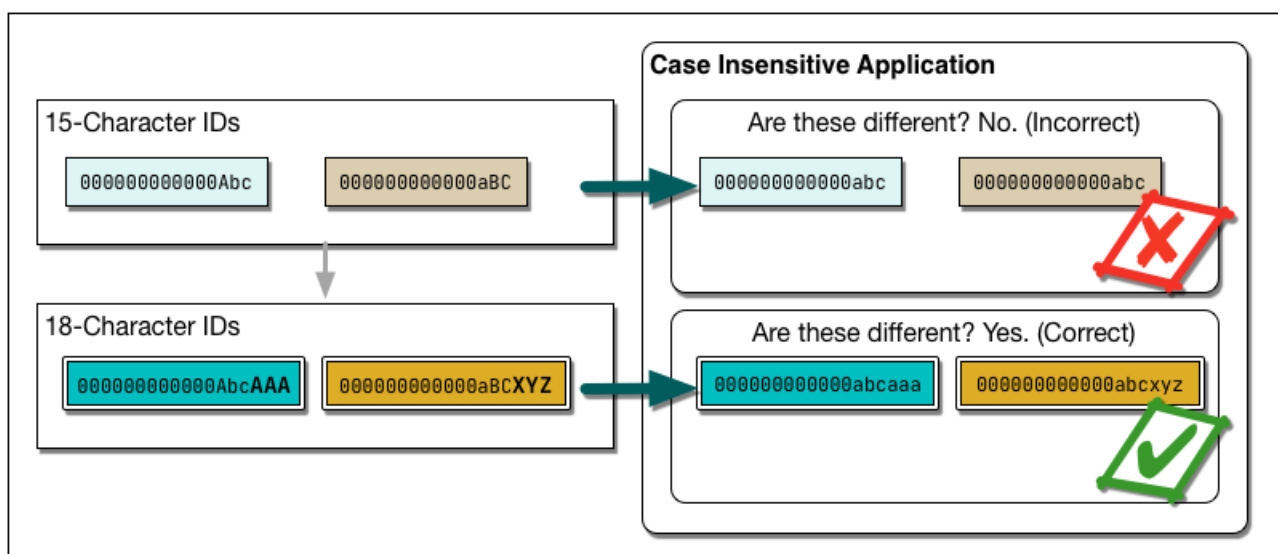

 **Note:** 18-character IDs are *case-safe*, but not *case-insensitive*. In other words, if you manually change the case of an 18-character ID, Salesforce detects that the three extra characters don't match the case of the preceding characters and returns an error.

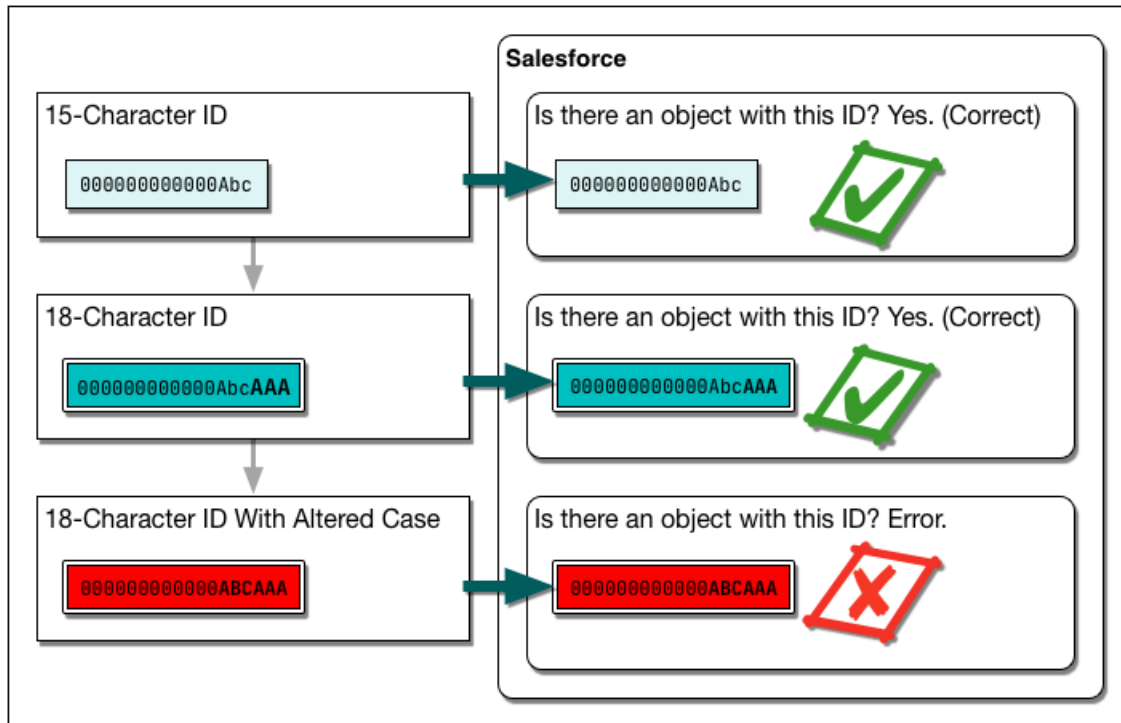

To convert the 18-character ID to a 15-character version, you may truncate the last three characters. However, Salesforce recommends that you use the 18-character ID.

JunctionIdList Field Type

Starting in API version 34.0, the `JunctionIdList` field type lets you directly manipulate the many-to-many relationship of an entity. You no longer need to manipulate underlying junction entity records. `JunctionIdList` fields can be queried and updated like any other field on the entity. Queries or updates to `JunctionIdList` fields act as queries or updates to the underlying junction entity records. Fields of type `JunctionIdList` appear in the WSDL as an unbounded array of type ID.

Query `JunctionIdList` fields like any other field. For example, this SOQL query includes `TaskWhoIds`, which is a `JunctionIdList` field.

```
SELECT Id, Subject, TaskWhoIds
FROM Task
WHERE LastModifiedDate > LAST_WEEK
```

The total number of records allowed in a single SOQL query can't exceed 500 when one of the fields being queried on is a `JunctionIdList` type. If the number of IDs in the query exceeds 500, the query fails and returns the `MALFORMED_QUERY` exception.

The restriction is (total number of entity records) * (total number of records in the entity's `JunctionIdList` field) must equal less than 500. For example, you query on the `EventWhoIds` `JunctionIdList` field for a list of events. There are 101 events and for each event, there are 5 records in the `EventWhoIds` `JunctionIdList`. Therefore, the Salesforce Object Query Language query would be querying for 505 records in total, which is over the 500 limit, and you get an exception.

To avoid exceeding the record limit, reformulate the query so it includes fewer than 500 junction IDs or query a parent/child relationship instead of junction IDs. For example, this Salesforce Object Query Language query includes `CcIds`, which is a `JunctionIdList` field.

```
SELECT Subject, CcIds
FROM EmailMessage
```

This example shows the conversion of a `JunctionIdList` query into a parent/child query.

```
SELECT Subject, (SELECT Id FROM EmailMessageRelations WHERE RelationType = 'CcAddress')
FROM EmailMessage
```

All `JunctionIdLists` are read-only in Apex. Attempting to set a new value on an existing object results in an exception.

Multi-Select Picklist Field Type

Multi-select picklist fields contain a list of one or more items from which a user can choose multiple items. One of the items can be configured as the default item. Selections are maintained as a string containing a series of attributes delimited by semicolons. For example, a query can return the values of a multivalue picklist as “first value; second value; third value”. For information on querying multi-select picklists, see Query Multi-Select Picklists in the [Salesforce SOQL and SOSL Reference Guide](#).

Percent Field Type

Percent fields contain percent values. Percent fields are defined as type `double`.

Phone Field Type

Phone fields contain phone numbers, which can include alphabetic characters. Client applications are responsible for phone number formatting.

Picklist Field Type

Picklist fields contain a list of one or more items from which a user chooses a single item. They display as dropdown lists in the Salesforce user interface. One of the items can be configured as the default item.

In the `Field` object associated with the `DescribeObjectResult`, the `restrictedPicklist` field defines whether the field is a restricted picklist or not. The API doesn’t enforce the list of values for advisory (unrestricted) picklist fields on `create()` or `update()`. When inserting an unrestricted picklist field that doesn’t have a `PicklistEntry`, the system creates an “inactive” picklist value. This value can be promoted to an “active” picklist value by adding the picklist value in the Salesforce user interface.

When creating new, inactive picklists, the API checks to see if there’s a match. This check is case-insensitive.

In the `Field` object associated with the `DescribeObjectResult`, the `picklistValues` field contains an array of items (`PicklistEntry` objects). Each `PicklistEntry` defines the item’s label, value, and whether it’s the default item in the picklist (a picklist has no more than one default value).

Enumerated fields support localization of the labels to the language of the user. For example, for the `Industry` field on an `Account`, the value “Agriculture” can be translated to various languages. The enumerated field values are fixed and don’t change with a user’s language. However, each value may have a specified “label” field that provides the localized label for that value. Always use the value when inserting or updating a field. The `query()` call always returns the value, not the label. Use the corresponding label for a value in the `describeObjectResult` when displaying the value to the user in any user interface.

The API supports the retrieval of the certain picklists in the following objects: `CaseStatus`, `ContractStatus`, `LeadStatus`, `OpportunityStage`, `PartnerRole`, `SolutionStatus`, `TaskPriority`, and `TaskStatus`. Each object represents a value in the respective picklist. These picklist entries always specify some other piece of information, such as whether the status is converted. Your client application can invoke the `query()` call on any of these objects (such as `CaseStatus`) to retrieve the set of values in the picklist. The application can then use that information while processing other objects (such as `Case` objects) to find more information about those objects (such as a given case). These objects are read-only via the API. To modify items in picklists, you must use the Salesforce user interface.

Reference Field Type

A reference field contains an `Id` value that points to a unique record (usually the parent record) on another object. A reference field is analogous to the concept of a foreign key in relational databases. The name of a reference field ends, by convention, with the letters `Id` (such as `CaseId` or `OpportunityId`). For example, in the `OpportunityCompetitor` object, the `OpportunityId` field is a reference field that points to the `Opportunity` object. It contains an ID value that uniquely identifies an `Opportunity` record.

Sometimes, an object can refer to another object of its same type. For example, an `Account` can have a parent link that points to another `Account`.

The `Event` and `Task` objects both have `whoId` and `whatId` cross-reference ID fields. Each of these cross-reference fields can point to one of several other objects. The `whoId` field can point to a `Contact` or `Lead`, and the `whatId` field can point to an `Account`, `Opportunity`, `Campaign`, or `Case`. In addition, if the `whoId` field refers to a `Lead`, then the `whatId` field must be empty.

You can describe and query each cross-referenced object. When you query a cross-reference ID field, it returns an object ID of the appropriate type. You can then query that ID to get additional information about the object, using the ID in the `id` field for that query.

The cross-reference ID field value is either:

- a valid record in your organization, or
- an empty value, which indicates an empty reference

The cross-reference ID field value, if non-`null`, is guaranteed to be an object in your org. However, it isn't guaranteed that you can query that object. Users with the "View All Data" permission can always query that object. Other users can be restricted from viewing or editing the referenced object.

When specifying a value for a cross-reference ID field in a `create()` or `update()` call, the value must be a valid value of type ID, and the user must have appropriate access to that object. The exact requirements vary from field to field.

Textarea Field Type

Textarea fields contain text that can be longer than 4,000 bytes. Unlike string fields, textarea fields can't be specified in the `WHERE` clause of a `queryString` of a `query()` call. To filter records on this field, you must do so while processing records in the `QueryResult`. For fields with this restriction, its `filterable` field in the Field type (described in the `fields` property of the `DescribeObjectResult`) is `false`.

URL Field Type

URL fields contain URLs. Client applications are responsible for specifying valid and properly formatted URLs in `create()` and `update()` calls.

API Field Properties

Fields on objects represent the details of each object and are analogous to columns in a database table. Each field on each object has one or more of the following properties:

Property	Description
Aggregatable	Can be used by one of the SOQL aggregate functions.
Autonumber	The API creates an autonumber.
Create	Value for the field can be specified during create using the API.
Defaulted on create	If no other value is specified when created, a default value is supplied.
Delete	Value for the field can be deleted using the API.
Filter	Can be used as filter criteria in a SOQL query FROM or WHERE clause.
Group	Can be included in the GROUP BY clause of a SOQL query (<code>true</code>) or not (<code>false</code>). Available in API version 18.0 and later.
idLookup	Can be used to specify a record in an upsert call. The <code>Id</code> field of each object has this property and some <code>Name</code> fields. There are exceptions, so check for the property in any object you wish to upsert.
Namepointing	Indicates whether the field's value is the Name of the parent of this object (<code>true</code>) or not (<code>false</code>). Used for objects whose parents can be more than one type of object. For example, a task can have an account or a contact as a parent.
Nullable	The field can contain a null value.
Query	The field can be queried with SOQL using the API.
Restricted picklist	A picklist whose values are restricted to those values defined by a Salesforce admin. Users can't load unapproved values through the API.
Retrieve	Value of the field can be retrieved using the API.
Sort	Indicates whether a query can sort on this field (<code>true</code>) or not (<code>false</code>).
Update	Can be updated using the API.

Required Fields

Required fields must have a non-`null` value. This rule affects the create and update calls:

- In a create call, the system automatically populates the data for certain required fields (such as system fields and the object ID fields). Similarly, if a required field has a default value (its `defaultedOnCreate` attribute is set to `true`, then the system implicitly assigns a value for this field when the object is created, even if a value for this field is not explicitly passed in on the create call. For all other required fields, such as ID fields that are analogous to foreign keys in SQL, a client application must explicitly assign a value when the object is created (it cannot be `null`).
- In updates, a required field cannot be set to `null`, and many required fields can't be changed.

Any field not specified as required in the object description is optional, that is, it can be `null` when updated or created.

Some required fields for some objects require special handling.

System Fields

System fields are read-only fields found on most objects. These fields are automatically updated during API operations. For example, the `ID` field is automatically generated during a create operation and the `LastModifiedDate` is automatically updated when a user modifies a record.

Field	Field Type	Description
<code>Id</code>	ID	Globally unique string that identifies a record. For information on IDs, see ID Field Type . Because this field exists in every object, it is not listed in the field table for each object. <code>Id</code> fields have Defaulted on create and Filter access.
<code>IsDeleted</code>	boolean	Indicates whether the record has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>).
<code>LastReferencedDate</code>	dateTime	Date and time when the current user last viewed or modified this record, a record related to this record, or a list view. If this value is <code>null</code> , the current user has never viewed or modified a record related to this object. This field doesn't exist on records for a custom object unless a custom object tab is created for that object. See Use LastReferencedDate and LastViewedDate fields in a SOQL query .
<code>LastViewedDate</code>	dateTime	Date and time when the current user last viewed or modified this record. If this value is <code>null</code> , the current user has never viewed or modified this record. This field doesn't exist on records for a custom object unless a custom object tab is created for that object. See Use LastReferencedDate and LastViewedDate fields in a SOQL query .
Audit Fields		
<code>CreatedById</code>	reference	ID of the User who created this record. <code>CreatedById</code> fields have Defaulted on create and Filter access.
<code>CreatedDate</code>	dateTime	Date and time when this record was created. <code>CreatedDate</code> fields have Defaulted on create and Filter access.
<code>LastModifiedById</code>	reference	ID of the User who last updated this record. <code>LastModifiedById</code> fields have Defaulted on create and Filter access.
<code>LastModifiedDate</code>	dateTime	Date and time when a user last modified this record. <code>LastModifiedDate</code> fields have Defaulted on create and Filter access.
<code>SystemModstamp</code>	dateTime	Date and time when a user or automated process (such as a trigger) last modified this record. In this context, "trigger" refers to Salesforce code that runs to implement standard functionality, and not an Apex trigger. <code>SystemModstamp</code> fields have Defaulted on create and Filter access.



Note: In general, `SystemModstamp` shows the date and time when a user or automated process last modified the record. However, in certain cases, `SystemModstamp` doesn't capture every field change. For example, if object A retrieves values from object B, then the changes to

Field	Field Type	Description
		field values in records on object B are reflected in the <code>SystemModstamp</code> field for records on object B, but not on object A.

 **Note:** Audit Fields with the `dateTime` field type have a certain range of valid dates. Unlike other `dateTime` fields, the earliest valid date is 1970-01-01T00:00:00Z GMT, or just after midnight on January 1, 1970. The latest valid date is 4000-12-31T00:00:00Z GMT, or just after midnight on December 31, 4000. These values are offset by your time zone. For example, in the Pacific time zone, the earliest valid date is 1969-12-31T16:00:00, or 4:00 PM on December 31, 1969.

If you import data into Salesforce and want to retain the audit field values of the source system, you can set the values for audit fields on the following objects: Account, ArticleVersion, Attachment, CampaignMember, Case, CaseComment, Contact, ContentVersion, Contract, Event, Idea, IdeaComment, Lead, Opportunity, Question, Task, Vote, and custom objects. The only audit field you cannot set a value for is `systemModstamp`.

1. From Setup, enter *User Interface* in the *Quick Find* box, then select **User Interface** under *Customize*.
2. Under Setup, select **Enable “Set Audit Fields upon Record Creation” and “Update Records with Inactive Owners” User Permissions**.
3. In the permission set or profile that you want to set audit fields with, enable the permission **Set Audit Fields upon Record Creation**.
4. Using the API, create a record and set its audit fields.

Not all standard objects have all audit fields. Check the Enterprise WSDL to verify which audit fields are available for a given object.

Parent Reference Fields

If an object has a relationship to a parent object, two fields are added.

- `Parent_Name` contains the object name of the parent. For example, Case has a `Contact` field that contains a reference to the contact parent of the case.
- `Parent_NameId` contains the ID of the parent. For example, Case has a `ContactId` field that refers to the contact parent of the case. This field is used in SOQL relationship queries such as the following:

```
SELECT Case.ContactId, Case.Contact.Name FROM Case
```

Even if the object can parent itself, these fields occur. For example, the Campaign object has a `CampaignName` and `CampaignId` field for referencing the parent Campaign.

Frequently Occurring Fields

In addition to system fields, these fields are found on many objects.

- `OwnerId`
- `RecordTypeId`
- `CurrencyIsoCode`

OwnerId

Objects have an `OwnerId` field that is a reference to the user who owns that object. Ownership is an important concept that affects the security model and has other implications throughout the system. Any user can query the owner field for any record they can access. However, setting the `OwnerId` field has the following limitations:

- For most users and most objects, this field can't be set directly upon insert. It is implicitly set to the current user when inserting an object.
- When creating or updating a Case or Lead, a client application (that is logged in with sufficient permissions to transfer a record) can set this field to any valid User in the organization or to any valid queue of the appropriate type in the organization.
- Updating this field via the API changes only the owner of that record. The change of ownership does not cascade to associated records as it does when you transfer record ownership in the Salesforce user interface.
- Updating this field on an account deletes the existing sharing information and reapplies the organization-wide sharing defaults and sharing rules.
- To update the `OwnerId` field, the user must have the "Transfer Record" permission and Read access to the new owner.

In API version 12.0 and later, if your organization has set up opportunity teams, `OwnerId` fields behave the same for Account and Opportunity objects as for other objects. That is, if you update the `OwnerId` field in either object, any AccountShare or OpportunityShare records with `RowCause` set to Sales Team are kept. In API version 11.0 and earlier, the sharing records are deleted.

RecordTypeId

Record types are used to offer different business processes and subsets of picklist values to different User records based on their Profile settings. (In addition, person accounts use record types to manage a number of additional elements.)

Record types are configured in the user interface or by creating, editing, or deleting the RecordType object in the API. Retrieve the list of valid record type IDs (String) for an object by querying the RecordType object.

The `RecordTypeId` field in an object contains the ID of the RecordType record that is associated with a standard or custom object. You can create or update this field.

 **Note:** You can't create or update the `RecordTypeId` field on the CampaignMember records. Set the CampaignMember record type using the `CampaignMemberRecordTypeId` field on Campaign.

When specified in a create or update call, the record type ID (String) must refer to a valid record type for that object.

 **Note:** The `RecordTypeId` field is in your organization's WSDL only if at least one record type is configured for your organization in the Salesforce user interface.

CurrencyIsoCode

For organizations that have multicurrency enabled, the `CurrencyIsoCode` field contains the string representation of the currency ISO code associated with currency values in the object. Note that the User object also has a `DefaultCurrencyIsoCode` field, which is the default currency for that user. For example, a user in France could have a `DefaultCurrencyIsoCode` set to Euros, and that would be their default currency in the application. However, the User object could have currency custom fields stored in a different currency, that correspond to the organization currency at the time the user record is created.

Compound Fields

Compound fields group together multiple elements of primitive data types, such as numbers or strings, to represent complex data types, such as a location or an address. Compound fields are an abstraction that can simplify application code that handles the values, leading to more concise, understandable code.

Address compound fields are available in the SOAP and REST APIs in API version 30.0 and later. Geolocation fields are available in the SOAP and REST APIs in API version 26.0 and later, with some limitations on SOAP for API versions below 30.0.

Compound fields are accessible as a single, structured field, or as individual component fields. The values contained within the compound field and the values in individual fields both map to the same underlying data stored in Salesforce; they always have identical values. Code that references individual component fields is unaffected by the new compound fields.

Compound fields are read-only. Changes are performed by writing to the individual component fields. This maintains a single, consistent method for performing updates, and avoids the possibility of conflicts. For example, if both the `BillingAddress` compound field and `BillingCity` individual component field were updated in the same API call, it would be unclear which value should be saved.

Compound fields are available only through the SOAP and REST APIs. Compound fields are described in both the Enterprise and Partner WSDLs. Update your WSDL to at least API 30.0 to access the new compound data types.

Address Compound Fields

Standard addresses—addresses built into standard objects in Salesforce—are accessible in the SOAP API and REST API as an `Address`, a structured compound data type, as well as individual address elements. If you enabled Custom Address Fields, you can also add custom fields that mimic the standard address field behavior.

Geolocation Compound Field

Geolocation fields are accessible in the SOAP and REST APIs as a `Location`—a structured compound data type—or as individual latitude and longitude elements.

Compound Field Considerations and Limitations

Address and geolocation compound fields are convenient and result in more concise, clear code. Here are some things to consider when using them in your apps.

Address Compound Fields

Standard addresses—addresses built into standard objects in Salesforce—are accessible in the SOAP API and REST API as an `Address`, a structured compound data type, as well as individual address elements. If you enabled Custom Address Fields, you can also add custom fields that mimic the standard address field behavior.

The `Address` type extends the `Location` type, the data type used for compound geolocation fields. Using API 30.0 and later, standard addresses are available in the SOAP and REST APIs as a compound field of type `Address`, a structured data type that combines these fields.

Field	Type	Description
Accuracy	picklist	Accuracy level of the geocode for the address. For example, this field is known as <code>MailingGeocodeAccuracy</code> on Contact.
City	string	The city component of the address. For example, this field is known as <code>MailingCity</code> on Contact.
Country	string	The country component of the address. For example, this field is known as <code>MailingCountry</code> on Contact.

Field	Type	Description
CountryCode	picklist	The ISO country code for the address. For example, this field is known as <code>MailingCountryCode</code> on Contact. For Standard Address Fields, <code>CountryCode</code> is only available when state and country/territory picklists are enabled in your organization. For Custom Address Fields, <code>CountryCode</code> is always available, whether or not state and country/territory picklists are enabled in your organization.
Latitude	double	Used with <code>Longitude</code> to specify the precise geolocation of the address. For example, this field is known as <code>MailingLatitude</code> on Contact.
Longitude	double	Used with <code>Latitude</code> to specify the precise geolocation of the address. For example, this field is known as <code>MailingLongitude</code> on Contact.
PostalCode	string	The postal code for the address. For example, this field is known as <code>MailingPostalCode</code> on Contact.
State	string	The state component of the address. For example, this field is known as <code>MailingState</code> on Contact.
StateCode	picklist	The ISO state code for the address. For example, this field is known as <code>MailingStateCode</code> on Contact. <code>StateCode</code> is available only when state and country/territory picklists are enabled in your organization.
Street	textarea	The street component of the address. For example, this field is known as <code>MailingStreet</code> on Contact.

Address fields are provided on many standard objects, such as Account, Contact, Quote, and User. Some objects provide fields for multiple addresses. For example, Account provides four different addresses. In this case, address field names are prefixed with the type of address, for example, `BillingAddress` and `ShippingAddress`.



Note: Standard address compound fields are read-only, and are only accessible using the SOAP and REST APIs. To learn about the limitations of compound fields, see [Compound Field Considerations and Limitations](#) on page 19.

When an address is geocoded, its latitude and longitude fields are populated with coordinates. A related geolocation field is also populated. Typically, geocoding service providers geocode addresses, and rate the accuracy of the geocodes.

The accuracy subfield `GeocodeAccuracy` stores the accuracy data for a geocoded location. External geolocation apps can get the accuracy level of a geocoded address via the API. When you retrieve an address via the API, any accuracy data is included. You can also retrieve the accuracy information by itself, if needed.

Like its parent, the compound `Address` field, the `GeocodeAccuracy` field is only available for standard address fields on standard objects.

Custom Address Fields

If you enabled Custom Address Fields, the `Address` field type is available in Object Manager when you add a custom field. Custom address fields mimic the behavior of standard address fields with some limitations.

For more information, see the [Custom Address Fields Developer Guide](#).

Retrieving Compound Address Fields

Using compound fields can simplify code that works with addresses, especially for SOQL queries. SOQL `SELECT` clauses can reference addresses directly, instead of all of the individual component fields.

```
SELECT Name, BillingAddress
FROM Account
```

To write a SOQL query that's compatible with API versions earlier than 30.0, as well as API 30.0 and later, use the individual fields:

```
SELECT Name, BillingStreet, BillingCity, BillingState, BillingPostalCode,
       BillingCountry, BillingLatitude, BillingLongitude
FROM Account
```

Compound address field values are returned as a structured data type, `Address`. Code that works with compound address fields must reference the individual components of the returned value. See the code sample below.



Example: Retrieve a Standard Address Compound Field with the SOAP API

This Java method uses the Salesforce SOAP API to retrieve and display the Mailing Address for a list of contacts.

```
// Modified version of code in the SOAP API QuickStart
private void querySample() {
    String soqlQuery = "SELECT FirstName, LastName, MailingAddress FROM Contact";
    try {
        QueryResult qr = connection.query(soqlQuery);
        boolean done = false;

        if (qr.getSize() > 0) {
            System.out.println("\nLogged-in user can see "
                               + qr.getRecords().length + " contact records.");

            while (!done) {
                System.out.println("");
                SObject[] records = qr.getRecords();
                for (int i = 0; i < records.length; ++i) {
                    Contact con = (Contact) records[i];
                    String fName = con.getFirstName();
                    String lName = con.getLastName();

                    // Access the compound address field MailingAddress
                    Address addr = (Address) con.getMailingAddress();
                    String streetAddr = "";
                    if (null != addr) streetAddr = addr.getStreet();

                    if (fName == null) {
                        System.out.println("Contact " + (i + 1) + ": " + lName +
                                           " -- " + streetAddr);
                    } else {
                        System.out.println("Contact " + (i + 1) + ": " + fName +
                                           " " + lName +
                                           " -- " + streetAddr);
                    }
                }

                if (qr.isDone()) {
```

```

        done = true;
    } else {
        qr = connection.queryMore(qr.getQueryLocator());
    }
}
} else {
    System.out.println("No records found.");
}
} catch (ConnectionException ce) {
    ce.printStackTrace();
}
}

```

Using Compound Address Fields as Locations

Compound address fields include latitude and longitude fields. Address fields can be used as locations in SOQL `WHERE` and `ORDER BY` clauses. For example, here's a SOQL query that uses the `GEOLOCATION` function to retrieve the 10 accounts closest to San Francisco.

```

SELECT Id, Name, BillingAddress
FROM Account
WHERE DISTANCE(BillingAddress, GEOLOCATION(37.775,-122.418), 'mi') < 20
ORDER BY DISTANCE(BillingAddress, GEOLOCATION(37.775,-122.418), 'mi')
LIMIT 10

```

 **Note:** In Developer, Professional, Enterprise, Unlimited, and Performance editions, Salesforce can automatically add or update geolocation fields for Account, Contact, Lead, and WorkOrder records. To use this feature, your administrator must enable the geo data integration rule for each object. For all other objects and editions, set values for latitude and longitude by using SOQL, SOAP or REST API, or a geocoding service. You can then use address fields as locatable values. To find geocoding services, search AppExchange.

Geolocation Compound Field

Geolocation fields are accessible in the SOAP and REST APIs as a `Location`—a structured compound data type—or as individual latitude and longitude elements.

In API versions 26.0 and later, geolocation fields are available in the SOAP and REST APIs as a compound field of type `Location`. This structured data type contains the following fields.

- `latitude`
- `longitude`

 **Note:** SOAP calls that use API versions earlier than 30.0 return geolocation compound values as strings. See “Returned Geolocation Data Types” later in this topic.

Geolocation fields are provided on many standard objects, such as Account, Contact, Quote, and User, as part of their address field or fields. Geolocation fields can also be added as custom fields to standard or custom objects.

 **Note:**

- A geolocation compound field is read-only, although its `latitude` and `longitude` subfields are editable. You can only access compound fields using the SOAP or REST API. For more information about working with compound fields and their subfields, see [Compound Field Considerations and Limitations](#) on page 19.

- Although geolocation fields appear as a single field in the user interface, custom geolocation fields count as *three* custom fields towards your organization's limits: one for latitude, one for longitude, and one for internal use.

Retrieving Compound Geolocation Fields

Using compound fields can simplify code that works with geolocations, especially for SOQL queries. SOQL `SELECT` clauses can reference geolocations directly, instead of the individual component fields.

```
SELECT location__c
FROM Warehouse__c
```

To write code that's compatible with API versions earlier than 26.0 and with API versions 26.0 and later, use the individual latitude and longitude fields.

```
SELECT location__latitude__s, location__longitude__s
FROM Warehouse__c
```

Returned Geolocation Data Types

A compound geolocation field value is returned as the structured data type `Location`. Code that works with compound geolocation fields must reference the individual components of the returned value. See the sample code in [Address Compound Fields](#) on page 17.

In API versions earlier than 30.0, SOAP calls return compound geolocation field values as strings, instead of as a structured data type, for backward compatibility. If you plan to display your latitude and longitude values or pass them to a service that expects strings, use the values that are returned. If you plan to use the values in mathematical calculations or pass them to a map service that expects numbers, cast the results to numbers.

The string value format is:

```
API location: [latitudeValue longitudeValue]
```

An example of a regular expression to parse out the latitude and longitude values is:

```
API location: \([[-+]?[0-9]{1,2}(\.[0-9]+)?\)[[-+]?[0-9]{1,3}(\.[0-9]+)?\]
```

The first capture is the latitude, and the third is the longitude.

Compound Field Considerations and Limitations

Address and geolocation compound fields are convenient and result in more concise, clear code. Here are some things to consider when using them in your apps.

Both address and geolocation compound fields have the following limitations.

- Compound fields are read-only. To update field values, modify the individual field components.
- Compound fields are accessible only through SOAP API, REST API, and Apex. The compound versions of fields aren't accessible anywhere in the Salesforce user interface.
- Although compound fields can be queried with the `Location` and `Address` Apex classes, they're editable only as components of the actual field. Read and set geolocation field components by appending "`__latitude__s`" or "`__longitude__s`" to the field name, instead of the usual "`__c`." For example:

```
Double theLatitude = myObject__c.aLocation__latitude__s;
myObject__c.aLocation__longitude__s = theLongitude;
```

You can't access or set the compound value.

- You can't use compound fields in Visualforce—for example, in an `<apex:outputField>`. To access or update field values, use the individual field components.
- If you select compound fields for export in the Data Loader, they cause error messages. To export values, use individual field components.
- Custom geolocation and location fields on standard addresses aren't supported with email templates.
- You can't use compound fields in lookup filters, except to filter distances that are within or not within given ranges. You can use distance lookup filters only in the Metadata API.
- The only formula functions that you can use with compound fields are `ISBLANK`, `ISCHANGED`, and `ISNULL`. You can't use `BLANKVALUE`, `CASE`, `NULLVALUE`, `PRIORVALUE`, or the equality and comparison operators with compound fields. The equality and comparison operators include `=` and `==` (equal), `<>` and `!=` (not equal), `<` (less than), `>` (greater than), `<=` (less than or equal), `>=` (greater than or equal), `&&` (AND), and `||` (OR).

Address compound fields have the following limitations.

- Compound address fields are available only for address fields that exist as part of the standard objects included in Salesforce.
- To add custom address fields on standard and custom objects, enable Custom Address Fields. For more information see the [Custom Address Fields Developer Guide](#).
- In Developer, Professional, Enterprise, Unlimited, and Performance editions, Salesforce can automatically add or update geolocation fields for Account, Contact, Lead, and WorkOrder records. To use this feature, your administrator must enable the geo data integration rule for each object. For all other objects and editions, set values for latitude and longitude by using Salesforce CLI, SOAP or REST API, or a geocoding service. You can then use address fields as locatable values. To find geocoding services, search AppExchange.
- The accuracy subfield of address fields is populated only when an address is geocoded. Typically, geocoding service providers provide accuracy data for an address's latitude and longitude coordinates.
- Address fields can't be used in `WHERE` statements in SOQL. Address fields aren't filterable, but the `isFilterable()` method of the `DescribeFieldResult` Apex class erroneously returns `true` for address fields.

Geolocation compound fields have the following limitations.

- Geolocation fields aren't supported in custom settings.
- Geolocation fields aren't available in dashboards or Schema Builder.
- Geolocation fields are available in Visual Workflow and in formula-based workflow and approvals, but they can't be used in filter-based workflow updates and approvals.
- `DISTANCE` formulas are supported in:
 - Entry criteria for workflow rules and approval processes
 - Field update actions in workflow rules and approval processes
 - Custom validation rules
 - Lookup filters (in the Metadata API only)
- Geolocation fields and latitude and longitude on standard addresses aren't supported in Salesforce to Salesforce.
- In Developer, Professional, Enterprise, Unlimited, and Performance editions, Salesforce can automatically add or update geolocation fields for Account, Contact, Lead, and WorkOrder records. To use this feature, your administrator must enable the geo data integration rule for each object. For all other objects and editions, set values for latitude and longitude by using SOQL, SOAP or REST API, or a geocoding service. You can then use address fields as locatable values. To find geocoding services, search AppExchange.
- Geolocation fields are supported in SOQL with the following limitations.
 - `DISTANCE` and `GEOLOCATION` are supported in `WHERE` and `ORDER BY` clauses in SOQL, but not in `GROUP BY`. `DISTANCE` is supported in `SELECT` clauses.

- `DISTANCE` supports only the logical operators `>` and `<`, returning values within (`<`) or beyond (`>`) a specified radius.
- When using the `GEOLOCATION` function in SOQL queries, the geolocation field must precede the latitude and longitude coordinates. For example, `DISTANCE(warehouse_location__c, GEOLOCATION(37.775,-122.418), 'km')` works but `DISTANCE(GEOLOCATION(37.775,-122.418), warehouse_location__c, 'km')` doesn't work.
- Apex bind variables aren't supported for the units parameter in the `DISTANCE` function. This query doesn't work.

```
String units = 'mi';
List<Account> accountList =
    [SELECT ID, Name, BillingLatitude, BillingLongitude
     FROM Account
     WHERE DISTANCE(My_Location_Field__c, GEOLOCATION(10,10), :units) < 10];
```

For more information and examples, see the [SOQL and SOSL Reference](#).

Custom Objects

In the user interface, you can extend your org's data by defining custom objects. Custom objects are custom database tables that allow you to store information unique to your organization. For custom objects, the `custom` flag—a Boolean field in the describe results—is `true`.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Client applications with sufficient permissions can invoke API calls on existing custom objects. You can create custom objects with the user interface, or by using the metadata WSDL with a client application or using the Salesforce Extensions for Visual Studio Code. For more information about using the metadata WSDL to create custom objects, see the [Lightning Platform Metadata API Developer's Guide](#). For more information about Visual Studio Code, see [Salesforce Extensions for Visual Studio Code](#).

Naming Conventions for Custom Objects

Your Salesforce admin defines an associated name field for each custom object during setup. Custom objects must have unique names within your org.

In the API, the names of custom objects include a suffix of two underscores followed by a lowercase “c”. For example, a custom object labeled “Issue” in the Salesforce user interface is `Issue__c` in that organization's WSDL.

Relationships change the naming convention.

For a custom object record to appear in the Salesforce user interface, its name field must be populated. If you use the API to create a custom object record that doesn't have a name, the record's ID is used as its name.

Relationships Among Custom Objects

Custom objects behave and relate to other objects just like standard objects do. For example, cascading deletes are supported in custom objects in a master-detail relationship.

Custom objects can also have many-to-many relationships with other custom objects or standard objects. A many-to-many relationship allows each record of one object to be linked to multiple records from another object and vice versa.

Custom objects require special treatment so that they can participate in Relationship Queries. For the relationship field name of a custom object, `__r` is appended to the name to create the ID. Also, `__c` is appended to the name to create the parent object pointer. For

example, if the relationship field name is `MyRel`, the name of the ID becomes `MyRelId__r`, the parent object pointer becomes `MyRel__c`, and the relationship name is `MyRel__r`. For more information, see [Understanding Relationship Names, Custom Objects, and Custom Fields in the Salesforce SOQL and SOSL Reference Guide](#).

This table summarizes whether a standard object can be:

- The master in a master-detail relationship with a custom object. Master-detail relationships involve cascading deletes and sharing rules that the parent controls.
- The lookup in a lookup relationship on a custom object. In other words, whether a custom object can have a lookup to the standard object.
- Extended with custom fields.

Standard Object	Master-Detail	Lookup	Custom Fields
Account	Yes	Yes	Yes
Campaign	Yes	Yes	Yes
Case	Yes	Yes	Yes
Contact	Yes	Yes	Yes
Contract	Yes	Yes	Yes
Event	No	No	Yes
Lead	No	No	Yes
Opportunity	Yes	Yes	Yes
Product2	No	Yes	Yes
Solution	Yes	Yes	Yes
Task	No	No	Yes
User	No	Yes	Yes

Audit Fields for Custom Objects

Custom objects can have the same audit fields as standard objects. When you create a custom object, the four audit fields, `CreatedById`, `CreatedDate`, `LastModifiedById`, and `LastModifiedDate`, are created and populated for the object. These fields are read only. If you import data into Salesforce custom objects and want to retain the audit field values from the source system, you can set the values when you create the custom objects. The only audit field you can't set a value for is `SystemModstamp`. Your organization must be API enabled, and you must have the "Modify All Data" permission.

1. From Setup, enter *User Interface* in the **Quick Find** box, then select **User Interface** under Customize.
2. Under Setup, select **Enable "Set Audit Fields upon Record Creation" and "Update Records with Inactive Owners" User Permissions**.
3. In the permission set or profile that you want to set audit fields with, enable the permission **Set Audit Fields upon Record Creation**.
4. Using the API, create a record and set its audit fields.

Note these restrictions:

- `CreatedDate` can't be greater than the `LastModifiedDate`.

- You can't set any date field to be greater than the current time.

Sharing and Custom Objects

A sharing rule object is created for each custom object that doesn't have a master-detail relationship to another object. They're similar to standard object sharing rules, for example `AccountOwnerSharingRule`. If the user creating the custom object has the "Manage Sharing" permission, a sharing rule object is automatically created for it.

Apex sharing reasons can be retrieved describing the custom object's sharing object, and examining the information in the `rowCause` field. The name of a sharing object for each custom object is of the form: `MyObjectName__Share`, similar to `AccountShare` and other standard object sharing objects.

Tags and Custom Objects

When a custom object is created, a Tag object related to it's also created. These object names are of the form: `MyObjectName__Tag`, similar to `AccountTag` and other standard object tag objects.

Standard Fields for Custom Objects

When a custom object is created, Salesforce assigns some standard fields to the object or entity. For details, see [Custom Objects](#).

Required Fields in Custom Objects

In the user interface, you can mark a custom field as required, and this rule is also enforced in the API. Each custom field has a `nullable` attribute, with a data type boolean. The default value is `false`. If set to `true`, each request supplies a value (or leaves the current value) to this field. Otherwise, the request fails. When the value is set to `true`, the next time the field is edited or created, the validation applies. If no value is supplied or default value specified, the request fails.

To edit the `nullable` attribute, you must log in as a user with the "Customize Application" permission.

If you change a custom object field to be required in an existing client application or integration, be sure that a value is supplied for that field. For example, if the custom picklist field `Education_Level` on the contact object is required, supply a default value for that custom field. If a required field doesn't have a specified or default value, an error with the status code `REQUIRED_FIELD_MISSING` is returned.

Managed Packages and API Names

If you have an unmanaged package and a managed package version becomes available, the API names of custom fields, custom objects, and Scontrol objects in the package change. A namespace prefix is added to each component to make it unique: `name__c` becomes `prefix__name__c`. To move from an unmanaged package to a managed package version of the same application, export your data, uninstall the old package, and install the new package. Then review the name changes and import your data with the relevant mapping. For details, see the [ISVforce Guide](#).

SEE ALSO:

[Custom Objects](#)

Custom Fields

Salesforce administrators can define custom fields for standard or custom objects in their organization using the user interface. During creation, the `custom` flag—a Boolean field in the Field object—is set to true. Client applications cannot define custom fields via the API. Usually, client applications do not need to know whether a field is a standard field or a custom field.

Note that all numeric custom fields are handled as type double.

Objects That Support Custom Fields

Standard Object	Master-Detail	Lookup	Custom Fields
Account	Yes	Yes	Yes
Campaign	Yes	Yes	Yes
Case	Yes	Yes	Yes
Contact	Yes	Yes	Yes
Contract	Yes	Yes	Yes
Event	No	No	Yes
Lead	No	No	Yes
Opportunity	Yes	Yes	Yes
Product2	No	Yes	Yes
Solution	Yes	Yes	Yes
Task	No	No	Yes
User	No	Yes	Yes

Naming Conventions for Custom Fields

Custom objects have an associated name field that is defined by your Salesforce administrator. Custom fields must have unique names within the same object.

In the API, the names of custom fields are identified by a suffix of two underscores immediately followed by a lowercase “c” character. For example, a custom object labeled “Issue” in the user interface is seen as `Issue__c` in that organization's WSDL. Similarly, a custom field labeled “Hire Date” in the user interface is seen as `Hire_Date__c` in that organization's WSDL.

External ID Attribute on Custom Fields

In the user interface, you can identify one custom field on an object as being an external ID field. The field type must be a text, number, or email field. An external ID contains record IDs from a system outside of Salesforce. You can match against this field during import or integration, or when upserting records.

Uniqueness for Custom Fields

In the user interface, you can specify that a custom field on a custom object contain unique values across all the records of that custom object type. The uniqueness can be either case sensitive or case insensitive. In the API, you can find out if a field is unique by issuing a describe call against the custom object and inspecting two attribute values:

- If the `unique` field is set to `true`, the custom field values must be unique across all records of that custom object type in the organization. A value of `false` means the field can have the same value in different records of that custom object type.
- If the `caseSensitive` field is set to `true`, the uniqueness (if enabled) is case sensitive. For example “ABC” and “abc” are considered two unique values. If the value is `false`, then “ABC” and “abc” are considered the same value.

These values cannot be set or modified using API calls. If a custom field on a custom object has `unique` set to `true`, and you try to insert a duplicate value, a `DUPLICATE_VALUE` exception code is returned.

Default Values in Custom Fields

You can set a default value on a custom field using a formula field:

- The user logged in for API activity must have the “Customize Application” permission.
- The field must have a data type of currency, date, datetime, int, double, percent, string, textarea, email, phone, or url. You cannot use composite fields like Address, Person, Names, nor Fiscal Periods. Note that you can set a checkbox as checked or unchecked by default using the user interface, but you cannot set it using a formula field.
- Default formulas run on fields, and the results are saved, even if the fields are hidden by field-level security.
- Default values are not used for lead conversion, importing, or merging records.

Managed Packages and API Names

If you have an unmanaged package and a managed package version becomes available, the API names of custom fields, custom objects, and Scontrol objects in the package change. A namespace prefix is added to each component to make it unique: `name__c` becomes `prefix__name__c`. To move from an unmanaged package to a managed package version of the same application, export your data, uninstall the old package, and install the new package. Then review the name changes and import your data with the relevant mapping.

AppExchange Object Prefixes and the API

If you have an unmanaged package and a managed package version becomes available, the API names of custom fields, custom objects, and Scontrol objects in the package change. A namespace prefix is added to each component to make it unique: `name__c` becomes `prefix__name__c`. To move from an unmanaged package to a managed package version of the same application, export your data, uninstall the old package, and install the new package. Then review the name changes and import your data with the relevant mapping. For details, see the [ISVforce Guide](#).

Relationships Among Standard Objects and Fields

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Relationships associate objects with other objects. For example, a relationship can link a custom object to standard object in a related list, such as linking a custom object called Issues to cases to track product defects associated with customer cases. To view the parent and child relationships among standard objects, see the ERD diagrams in [Data Model](#).

 Note:

- You can use parent-child relationships in SOQL queries. For more information, see Relationship Queries in the [Salesforce SOQL and SOSL Reference Guide](#).
- Only lookup, external lookup, and indirect lookup relationships are available for external objects. No other relationship types are supported. See Salesforce Help: External Object Relationships.

You can define different types of relationships by creating custom relationship fields on an object. The differences between relationship types include how they handle data deletion, record ownership, security, and required fields in page layouts:

- **Master-Detail (1:n)** — A parent-child relationship where the master object controls certain behaviors of the detail object.
 - When a record of the master object is deleted, its related detail records are also deleted.
 - The `Owner` field on the detail object isn't available and is automatically set to the owner of its associated master record. Custom objects on the detail side of a master-detail relationship can't have sharing rules, manual sharing, or queues, because these elements require the `Owner` field.
 - The detail record inherits the sharing and security settings of its master record.
 - The master-detail relationship field is required on the page layout of the detail record.
 - By default, records can't be reparented in master-detail relationships. But administrators can allow child records in master-detail relationships on custom objects to be reparented to different parent records by selecting the `Allow reparenting` option in the master-detail relationship definition.

You can define master-detail relationships between custom objects or between a custom object and a standard object. But the standard object can't be on the detail side of a relationship with a custom object. And you can't create a master-detail relationship where these standard objects are the primary object.

- BusinessHours
- Idea
- Lead
- OrderItem
- PriceBook2
- Product2
- QuoteLineItem
- User

When you define a master-detail relationship, the custom object that you're working on is the detail side. Its data can appear as a custom related list on page layouts for the other object.

- **Many-to-many** — You can use master-detail relationships to model *many-to-many* relationships between any two objects. A many-to-many relationship allows each record of one object to be linked to multiple records from another object and vice versa. For example, you create a custom object called Issue that relates to the standard Case object. In this example, an issue could be related to multiple cases and a case could also be related to multiple issues. To create a many-to-many relationship, simply create a custom junction object with two master-detail relationship fields, each linking to the objects that you want to relate.

Custom objects with two master-detail relationships are supported in API version 11.0 and later.

Starting in API version 34.0, the `JunctionIdList` field type lets you manipulate the many-to-many relationship of an entity directly. You no longer manipulate underlying junction entity records. `JunctionIdList` fields can be queried and updated like any other field on the entity. Queries or updates to `JunctionIdList` fields act as queries or updates to the underlying junction

entity records. Fields of type `JunctionIdList` appear in the WSDL as an unbounded array of type `ID`. `JunctionIdList` is implemented in the `Task` and `Event` objects. All `JunctionIdLists` are read-only in Apex. Attempting to set a new value on an existing object will result in an exception.

- **Lookup (1:n)** — This type of relationship links two objects, but has no effect on deletion or security. Unlike master-detail fields, lookup fields aren't automatically required. When you define a lookup relationship, data from one object can appear as a custom related list on page layouts for the other object.

To create relationships, use the user interface or Salesforce Metadata API.

Factors that Affect Data Access

Some factors affect access to your organization's data.

When using the API, the following factors affect access to your organization's data:

Access

Your organization must be enabled for API access.

Objects may not be available until you contact Salesforce and request access. For example, `Territory2` is visible only if Enterprise Territory Management has been enabled in the application. Such requirements are in the "Usage" section for each object.

Sometimes a feature must be used once before objects related to it can be accessed with the API. For example, the `recordTypeIds` is available only after at least one record type has been created for your organization in the user interface.

To investigate data access issues, you can start by inspecting the WSDL:

- **Enterprise WSDL:** The generated enterprise WSDL file contains all of the objects that are available to your organization. By using the API, a client application can access objects that are defined in your enterprise WSDL file.
- **Partner WSDL:** When using the generated partner WSDL file, a client application can access objects that are returned in the `describeGlobal()` call.

Object-Level and Field-Level Security

The API respects object-level and field-level security configured in the user interface. You can access objects and fields only if the logged-in user's permissions and access settings allow such access. For example, fields that are not visible to a given user are not returned in a `query()` or `describeObjects()` call. Similarly, read-only fields can't be updated.

User Permissions

A user attempting to access the API must have the permission "API Enabled" selected. It's selected by default.

Your client application logs in as a user called a *logged-in* user. The logged-in user's permissions grant or deny access to specific objects and fields in your organization:

- **Read**—Users can only view objects of this type.
- **Create**—Users can read and create objects of this type.
- **Edit**—Users can read and update objects of this type.
- **Delete**—Users can read, edit, and delete objects of this type.

User permissions do not affect field-level security. If field-level security specifies that a field is hidden, users with "Read" on that object can view only those fields that are not hidden on the record. In addition, users with "Read" on an object can view only those records that sharing settings allow. The one exception is the "Edit Read Only Fields" permission, which gives users the ability to edit fields marked as read only via field-level security.

Sharing

For most API calls, data that is outside of the logged-in user's sharing model is not returned. Users are granted the most permissive access that is available to them, either through organization-wide defaults or manual record sharing, just as in the application.

User Permissions that Override Sharing

- **View All Records**—Users can view all records associated with this object regardless of sharing settings.
- **View All Data**—Users can view all records regardless of sharing settings. This permission is a user permission, not an object-level permission like View All Records.
- **Modify All Records**—Users can read, edit, delete, transfer, and approve all records associated with this object, regardless of sharing settings.
- **Modify All Data**—Users can read, edit, delete, transfer, and approve all records regardless of sharing settings. This permission is a user permission, not an object-level permission like Modify All Records.

To protect the security of your data, give the logged-in user only the permissions needed to successfully execute all the calls made by the application. For large integration applications, “Modify All Data” may speed up call response times. If you are loading a large number of records, use [Bulk API 2.0](#) instead.

Related Objects

Some objects depend on other objects for permission. For example, AccountTeamMember follows sharing on the associated permission-assigned object such as the Account record. Similarly, a Partner depends on the permissions in the associated .

Ownership changes to a record do not automatically cascade to related records. For example, if ownership changes for a given Account, ownership does not then automatically change for any Contract associated with that Account—each ownership change must be made separately and explicitly by the client application.

Object Properties

To create an object with the `create()` call, the object's `createable` attribute must be set to `true`. To determine what operations are allowed on a given object, your client application can invoke the `describeObjects()` call on the object and inspect the properties in the `DescribeObjectResult`.



Note: `replicable` allows `getUpdated()` and `getDeleted()` calls.

Page Layouts and Record Types

Requirements defined in the Salesforce user interface for page layouts and record types are not enforced by the API:

- Page layouts can specify whether a given field is required, but the API does not enforce such layout-specific field restrictions or validations in `create()` and `update()` calls. It's up to the client application to enforce any such constraints, if applicable.
- Record types can control which picklist values can be chosen in a given record and which page layouts users with different profiles can see. However, such rules that are configured and enforced in the user interface are not enforced in the API. For example, the API does not validate whether the value in a picklist field is allowed per any record type restrictions associated with the profile of the logged-in user. Similarly, the API does not prevent a client application from adding data to a particular field simply because that field does not appear in a layout associated with the profile of the logged-in user.

Referential Integrity

To ensure referential integrity, the API forces or prevents certain behaviors:

- ID values in [reference fields](#) are validated in `create()` and `update()` calls.
- If a client application deletes a record, then its children are automatically deleted as part of the call if the `cascadeDelete` property on `ChildRelationship` for that child has a value of `true`. For example, if a client application deletes an Opportunity, then any associated OpportunityLineItem records are also deleted. However, if an OpportunityLineItem is not deletable or is currently being used, then deletion of the parent Opportunity fails. For example, if a client application deletes an Invoice_Statement, then any associated Line_Item records are also deleted. However, if a Line_Item is not deletable or is currently being used, then deletion of the parent Invoice_Statement fails. Use `DescribeObjectResult` to view the `ChildRelationship` value if you want to be sure what will be deleted.

There are certain exceptions that prevent the execution of a `cascadeDelete`. For example, you can't delete an account if it has associated cases, if it has related opportunities that are owned by other users, or if associated contacts are enabled for the

Customer Portal. In addition, if you attempt to delete an account that has closed/won opportunities owned by you or has active contracts, then the delete request for that record will fail.

Field and Type Differences in Salesforce Apps and APIs

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Generally, API data types and field types in the user interface have the same names. For example, a date field is represented by a date data type in the API. However, some field types are represented differently depending on whether you inspect an object via the API or the user interface. This table contains the mapping for field types and data types that are different.

API Data Type	Corresponding Field Types in the User Interface
ID	Lookup relationship, master-detail relationship
string	Auto number, email, phone, picklist, multi-select picklist, text, text area, long text area, rich text area, data category group reference, and URL. Different maximum lengths are specified in the WSDL for text, text area, and long text area.
boolean	Checkbox
double	Currency, formula, number, percent, and roll-up summary
Varies by type	When formula fields are created in the user interface, a type must be specified. This type corresponds to the API data type of the same name: currency, date, date/time, number, percent, or text.

All other fields that you can create in the user interface fall into one of these categories.

- The field isn't available in both the user interface and the API. For example, the BusinessHours object has fields of API data type time, but you can't create a custom field of this type.
- Field types are the same as their corresponding API data type. For example, if you create a date field in the user interface, that field is the date data type in the API.

Additionally, the user interface allows you to change the labels on some fields and tabs. Although you can't relabel fields or tabs using the API, you can retrieve the current values. To do so, issue a `describeSObjects()` call and inspect the label field of the returned `DescribeSObjectResult`.

For more information about API data types, see [Primitive Data Types](#) and [Field Types](#).

External Objects

External objects are supported in API version 32.0 and later. External objects are similar to custom objects, but external object record data is stored outside your Salesforce organization. For example, perhaps you have data that's stored on premises in an enterprise resource planning (ERP) system. Instead of copying the data into your org, you can use external objects to access the data in real time via web service callouts.

External objects are available with Salesforce Connect and Files Connect. Each external object is associated with an external data source definition in your Salesforce organization.

An external data source specifies how to access an external system. Salesforce Connect uses external data sources to access data that's stored outside your Salesforce organization. Files Connect uses external data sources to access third-party content systems. External data sources have associated external objects, which your users and the Lightning Platform use to interact with the external data and content.

By accessing record data on demand, external objects always reflect the current state of the external data. You don't have to manage a copy of that data in Salesforce, so you're not wasting storage and resources keeping data in sync.

External objects are best used when you have a large amount of data that you can't or don't want to store in your Salesforce organization, and you need to use only a small amount of data at any one time.

See [Define External Objects](#) in Salesforce Help for how to create and modify external objects.

Naming Conventions for External Objects

Object names must be unique across all standard, custom, and external objects in the org.

In the API, the names of external objects are identified by a suffix of two underscores immediately followed by a lowercase "x" character. For example, an external object named "ExtraLogInfo" in the Salesforce user interface is seen as `ExtraLogInfo__x` in that organization's WSDL.

We recommend that you make object labels unique across all standard, custom, and external objects in the org.

External Object Relationships

External objects support standard lookup relationships, which use the 18-character Salesforce record IDs to associate related records with each other. However, data that's stored outside your Salesforce org often doesn't contain those record IDs. Therefore, two special types of lookup relationships are available for external objects: external lookups and indirect lookups. See [External Object Relationships](#) in Salesforce Help for details.

Feature Support for External Objects

Most of the Salesforce features that support custom objects also support external objects. However, there are exceptions, and some features have special limitations and considerations for external objects. See the following topics in the Salesforce Help.

- [External Objects in Salesforce Connect](#)
- [Salesforce Platform Features Supported by Salesforce Connect](#)

Salesforce Connect Adapters

Salesforce Connect uses a protocol-specific adapter to connect to an external system and access its data. This table describes the available adapters.

Salesforce Connect Adapter	Description	When to Use
Cross-org	Uses the Lightning Platform REST API to access data that's stored in other Salesforce orgs.	To seamlessly connect data between your Salesforce orgs. For example, provide your service representatives a unified view of customer transactions by integrating data from different Salesforce orgs.

Salesforce Connect Adapter	Description	When to Use
OData 2.0 OData 4.0	Uses Open Data Protocol to access data that's stored outside Salesforce. The external data must be exposed via OData producers.	To integrate external data sources into your org that support the ODATA protocol and publish an OData provider. For example, give your account executives a unified data view by pulling data from legacy systems such as SAP, Microsoft, and Oracle in real time.
Custom adapter created via Apex	You use the Apex Connector Framework to develop your own custom adapter when the other available adapters aren't suitable for your needs. A custom adapter can obtain data from anywhere. For example, some data can be retrieved from anywhere in the Internet via callouts, while other data can be manipulated or even generated programmatically.	To develop your own adapter with the Apex Connector Framework when the other available adapters aren't suitable for your needs. For example, when you want to retrieve data via callouts from a REST API.

Files Connect Adapters

Several Files Connect adapters are also available:

- Google Drive
- Box
- SharePoint Online
- OneDrive for Business

For more information about Salesforce Connect, see [Salesforce Connect](#) in the Salesforce Help.

For details on using the Apex Connector Framework, see "Salesforce Connect" and "DataSource Namespace" in the [Apex Code Developer's Guide](#).

Big Objects

A big object stores and manages massive amounts of data on the Salesforce platform. You can archive data from other objects or bring massive datasets from outside systems into a big object to get a full view of your customers. Clients and external systems use a standard set of APIs to access big object data. A big object provides consistent performance, whether you have 1 million records, 100 million, or even 1 billion. This scale gives a big object its power and defines its features.

There are two types of big objects.

- Standard big objects—Objects defined by Salesforce and included in Salesforce products. `FieldHistoryArchive` is a standard big object that stores data as part of the Field Audit Trail product. Standard big objects are always available and can't be customized.
- Custom big objects—New objects that you create to store information unique to your org. Custom big objects extend the functionality that Lightning Platform provides. For example, if you're building an app to track product inventory, create a custom big object called `HistoricalInventoryLevels` to track historical inventory levels for analysis and future optimizations. This implementation guide is for configuring and deploying custom big objects.

EDITIONS

Available in: both Salesforce Classic and Lightning Experience

Available in: **Enterprise, Performance, Unlimited, and Developer** Editions for up to 1 million records

Custom Big Object Use Cases

- 360° view of the customer—Extend your Salesforce data model to include detailed information from loyalty programs, feeds, clicks, billing and provisioning information, and more.
- Auditing and tracking—Track and maintain a long-term view of Salesforce or product usage for analysis or compliance purposes.
- Historical archive—Maintain access to historical data for analysis or compliance purposes while optimizing the performance of your core CRM or Lightning Platform applications.

Differences Between Big Objects and Other Objects

Because a big object can store data on an unlimited scale, it has different characteristics than other objects, like sObjects. Big objects are also stored in a different part of the Lightning Platform.

Big Objects	sObjects
Horizontally scalable distributed database	Relational database
Non-transactional database	Transactional database
Hundreds of millions or even billions of records	Millions of records

These big object behaviors ensure a consistent and scalable experience.

- Big objects support only object and field permissions, not regular or standard sharing rules.
- Features like triggers, flows, processes, and the Salesforce mobile app aren't supported on big objects.
- When you insert an identical big object record with the same representation multiple times, only a single record is created so that writes can be idempotent. This behavior is different from an sObject, which creates a record for each request to create an object.

API Support for Big Objects

It's easy to integrate custom big objects with your live Salesforce data. You can process big objects with SOQL, Bulk, Chatter and SOAP APIs.

 **Note:** These APIs are the only APIs supported for big objects. The REST API, for example, isn't supported.

Define and Deploy Custom Big Objects

You can define custom big objects with Metadata API or in Setup. After you define and deploy a big object, you can view it or add fields in Setup. After you've deployed a big object, you can't edit or delete the index. To change the index, start over with a new big object. To define a big object in Setup, see Salesforce Help.

Define and Deploy Custom Big Objects

You can define custom big objects with Metadata API or in Setup. After you define and deploy a big object, you can view it or add fields in Setup. After you've deployed a big object, you can't edit or delete the index. To change the index, start over with a new big object. To define a big object in Setup, see Salesforce Help.

EDITIONS

Available in: both Salesforce Classic and Lightning Experience

Available in: **Enterprise, Performance, Unlimited, and Developer** Editions for up to 1 million records.

Define a Custom Big Object

Define a custom big object through Metadata API by creating XML files that contain its definition, fields, and index.

- **object** files—Create a file for each object to define the custom big object, its fields, and its index.
- **permissionset/profile** files—Create a permission set or profile file to specify permissions for each field. These files aren't required, but they're required to grant access to users. By default, access to a custom big object is restricted.
- **package** file—Create a file for Metadata API to specify the contents of the metadata you want to migrate.



Note: The package file is unrelated to the packaging feature for Salesforce. This file isn't an unlocked, unmanaged, or managed package. It's simply a file used by Metadata API.



Note: While custom big objects use the CustomObject metadata type, some parameters are unique to big objects and others aren't applicable. The specific metadata parameters that apply to big objects are outlined in this document.

Naming Conventions for Custom Big Objects

Object names must be unique across all standard objects, custom objects, external objects, and big objects in the org. In the API, the names of custom big objects have a suffix of two underscores immediately followed by a lowercase "b" (__b). For example, a big object named "HistoricalInventoryLevels" is seen as HistoricalInventoryLevels__b in that organization's WSDL. We recommend that you make object labels unique across all objects in the org - standard, custom, external and big objects.

CustomObject Metadata

Field Name	Field Type	Description
deploymentStatus	DeploymentStatus (enumeration of type string)	Custom big object's deployment status (Deployed for all big objects)
fields	CustomField[]	Definition of a field in the big object
fullName	string	Unique API name of the big object
indexes	Index[]	Definition of the index
label	string	Big object's name as displayed in the UI
pluralLabel	string	Field plural name as displayed in the UI

CustomField Metadata

Field Name	Field Type	Description
fullName	string	Unique API name of a field.
label	string	Field name as displayed in the UI.
length	int	Length of a field in characters (Text and LongTextArea fields only). The total number of characters across all text fields in an index can't exceed 100. To increase this value, contact Salesforce Customer Support.  Note: Email fields are 80 characters. Phone fields are 40 characters. Keep these lengths in mind when designing your index because they count toward the 100 character limit.
pluralLabel	string	Field plural name as displayed in the UI.
precision	int	Number of digits for a number value. For example, the number 256.99 has a precision of 5 (number fields only).
referenceTo	string	Related object type for a lookup field (lookup fields only).
relationshipName	string	Name of a relationship as displayed in the UI (lookup fields only).
required	boolean	Specifies whether the field is required. All fields that are part of the index must be marked as required.
scale	int	Number of digits to the right of the decimal point for a number value. For example, the number 256.99 has a scale of 2 (number fields only).
type	FieldType	Field type. Supports DateTime, Email, Lookup, Number, Phone, Text, LongTextArea, and URL.  Note: You can't include LongTextArea and URL fields in the index.

 **Note:** Uniqueness isn't supported for custom fields.

Index Metadata

Represents an index defined within a custom [big object](#). Use this metadata type to define the composite primary key (index) for a custom big object.

Field Name	Field Type	Description
fields	IndexField[]	The definition of the fields in the index.
label	string	Required. This name is used to refer to the big object in the user interface. Available in API version 41.0 and later.

IndexField Metadata

Defines which fields make up the index, their order, and sort direction. The order in which the fields are defined determines the order fields are listed in the index.



Note: The total number of characters across all text fields in an index can't exceed 100. To increase this value, contact Salesforce Customer Support.

Field Name	Field Type	Description
name	string	Required. The API name for the field that's part of the index. This value must match the <code>fullName</code> value for the corresponding field in the fields section and be marked as required. Warning: When querying a big object record via SOQL and passing the results as arguments to the delete API, if any index field name has a leading or trailing white space, you can't delete the big object record.
sortDirection	string	Required. The sort direction of the field in the index. Valid values are <code>ASC</code> for ascending order and <code>DESC</code> for descending order.



Example: Create Metadata Files for Deployment

The following XML excerpts create metadata files that you can deploy. Each Customer Interaction object represents customer data from a single session in an online video game. The `Account__c`, `Game_Platform__c`, and `Play_Date__c` fields define the index, and a lookup field relates the Customer Interactions to the Account object.

Customer_Interaction__b.object

```
<?xml version="1.0" encoding="UTF-8"?>
<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">
  <deploymentStatus>Deployed</deploymentStatus>

  <fields>
    <fullName>In_Game_Purchase__c</fullName>
    <label>In-Game Purchase</label>
    <length>16</length>
    <required>false</required>
    <type>Text</type>
    <unique>false</unique>
  </fields>

  <fields>
    <fullName>Level_Achieved__c</fullName>
    <label>Level Achieved</label>
    <length>16</length>
    <required>false</required>
    <type>Text</type>
    <unique>false</unique>
  </fields>

  <fields>
    <fullName>Lives_This_Game__c</fullName>
    <label>Lives Used This Game</label>
```

```

        <length>16</length>
        <required>>false</required>
        <type>Text</type>
        <unique>>false</unique>
    </fields>

    <fields>
        <fullName>Game_Platform__c</fullName>
        <label>Platform</label>
        <length>16</length>
        <required>true</required>
        <type>Text</type>
        <unique>>false</unique>
    </fields>

    <fields>
        <fullName>Score_This_Game__c</fullName>
        <label>Score This Game</label>
        <length>16</length>
        <required>>false</required>
        <type>Text</type>
        <unique>>false</unique>
    </fields>

    <fields>
        <fullName>Account__c</fullName>
        <label>User Account</label>
        <referenceTo>Account</referenceTo>
        <relationshipName>Game_User_Account</relationshipName>
        <required>true</required>
        <type>Lookup</type>
    </fields>

    <fields>
        <fullName>Play_Date__c</fullName>
        <label>Date of Play</label>
        <required>true</required>
        <type>DateTime</type>
    </fields>

    <fields>
        <fullName>Play_Duration__c</fullName>
        <label>Play Duration</label>
        <required>>false</required>
        <type>Number</type>
        <scale>2</scale>
        <precision>18</precision>
    </fields>

    <indexes>
        <fullName>CustomerInteractionsIndex</fullName>
        <label>Customer Interactions Index</label>
        <fields>
            <name>Account__c</name>

```

```

        <sortDirection>DESC</sortDirection>
    </fields>
    <fields>
        <name>Game_Platform__c</name>
        <sortDirection>ASC</sortDirection>
    </fields>
    <fields>
        <name>Play_Date__c</name>
        <sortDirection>DESC</sortDirection>
    </fields>
</indexes>

<label>Customer Interaction</label>
<pluralLabel>Customer Interactions</pluralLabel>
</CustomObject>

```

package.xml

```

<?xml version="1.0" encoding="UTF-8"?>
<Package xmlns="http://soap.sforce.com/2006/04/metadata">
    <types>
        <members>*</members>
        <name>CustomObject</name>
    </types>
    <types>
        <members>*</members>
        <name>PermissionSet</name>
    </types>
    <version>41.0</version>
</Package>

```

Customer_Interaction_BigObject.permissionset

```

<?xml version="1.0" encoding="UTF-8"?>
<PermissionSet xmlns="http://soap.sforce.com/2006/04/metadata">

    <label>Customer Interaction Permission Set</label>

    <fieldPermissions>
        <editable>true</editable>
        <field>Customer_Interaction__b.In_Game_Purchase__c</field>
        <readable>true</readable>
    </fieldPermissions>

    <fieldPermissions>
        <editable>true</editable>
        <field>Customer_Interaction__b.Level_Achieved__c</field>
        <readable>true</readable>
    </fieldPermissions>

    <fieldPermissions>
        <editable>true</editable>
        <field>Customer_Interaction__b.Lives_This_Game__c</field>
        <readable>true</readable>
    </fieldPermissions>

```

```

<fieldPermissions>
  <editable>true</editable>
  <field>Customer_Interaction__b.Play_Duration__c</field>
  <readable>true</readable>
</fieldPermissions>

<fieldPermissions>
  <editable>true</editable>
  <field>Customer_Interaction__b.Score_This_Game__c</field>
  <readable>true</readable>
</fieldPermissions>

</PermissionSet>


```

Deploy Custom Big Objects Using Metadata API

Use Metadata API and the [Ant Migration Tool](#) to deploy. When building files to deploy a custom big object, make sure the `object` file is in a folder called `objects` and the `permissionset` file is in a folder called `permissionsets`. Put the `package.xml` file in the root directory and not in a subfolder.

View a Custom Big Object in Setup

After you've deployed your custom big object, you can view it by logging in to your organization and, from Setup, entering *Big Objects* in the Quick Find box, then selecting **Big Objects**.

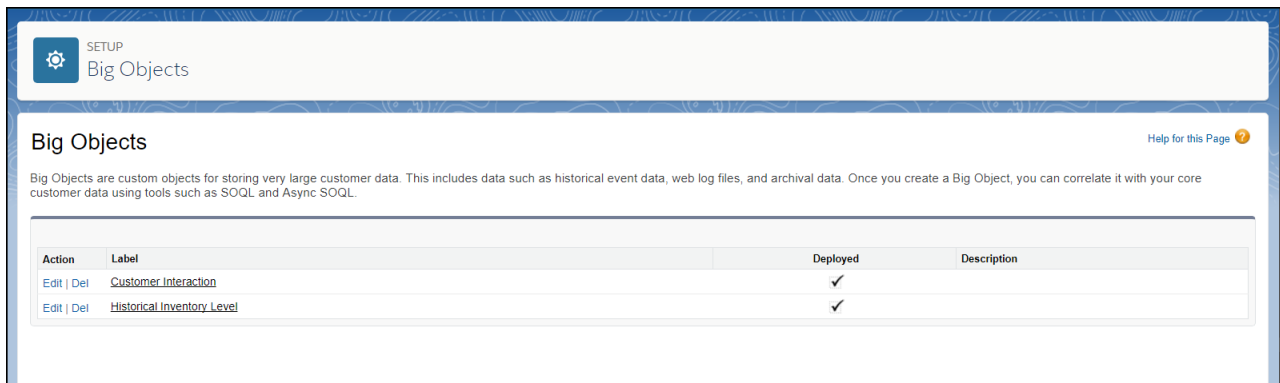

SETUP
Big Objects

Big Objects [Help for this Page](#)

Big Objects are custom objects for storing very large customer data. This includes data such as historical event data, web log files, and archival data. Once you create a Big Object, you can correlate it with your core customer data using tools such as SOQL and Async SOQL.

Action	Label	Deployed	Description
Edit Del	Customer Interaction	✓	
Edit Del	Historical Inventory Level	✓	

To see its fields and relationships, click the name of a big object.

Big Object Definition Detail

Singular Label	Customer Interaction	Description	
Plural Label	Customer Interactions	Deployment Status	Deployed
Object Name	Customer_Interaction		
API Name	Customer_Interaction__b		
Created By	Admin User, 9/11/2017 1:37 PM	Modified By	Admin User, 9/11/2017 1:38 PM

Standard Fields

No standard fields defined

Custom Fields & Relationships

Action	Field Label	API Name	Data Type	Indexed	Index Position	Index Direction	Modified By
Edit	Date of Play	Play_Date__c	Date/Time	✓	3	DESC	Admin User, 9/11/2017 1:37 PM
Edit	In-Game Purchase	In_Game_Purchase__c	Text(16)				Admin User, 9/11/2017 1:37 PM
Edit	Level Achieved	Level_Achieved__c	Text(16)				Admin User, 9/11/2017 1:37 PM
Edit	Lives Used This Game	Lives_This_Game__c	Text(16)				Admin User, 9/11/2017 1:37 PM
Edit	Platform	Game_Platform__c	Text(16)	✓	2	ASC	Admin User, 9/11/2017 1:37 PM
Edit	Play Duration	Play_Duration__c	Number(16, 2)				Admin User, 9/11/2017 1:37 PM
Edit	Score This Game	Score_This_Game__c	Text(16)				Admin User, 9/11/2017 1:37 PM
Edit	User Account	Account__c	Lookup(Account)	✓	1	DESC	Admin User, 9/11/2017 1:37 PM

Object Interfaces

An object interface defines the business logic that an object implements. The object that implements the interface, called the **implementor**, stores the data and implements the business logic.

An API that accepts a parameter with an object interface data type can accept any implementor of the object interface. For example, `/calculate-price` accepts the `SalesTransaction` object interface. You can use any implementor of `SalesTransaction`, such as an `Order` object, in the `/calculate-price` request.

REFERENCE

CHAPTER 2 Salesforce Object Behavior

In this chapter ...

- [Object Groups](#)
- [Salesforce Object Types](#)
- [Object Cheatsheet](#)

Learn how objects are related and how to choose the right Salesforce object for your data and transactions. Objects are categorized by data flow, storage, and transaction type, with some requiring specific licenses or managed packages.

Prefer listening to reading? Check out our AI-generated podcast on object behavior.

 [Watch a video](#)

Just as you pick different tools from your toolbox for different jobs, pick an object type based on the type of data you have and the kind of transactions you expect.

The type of object that you need is determined by the data you want to store in it and how you expect to interact with it.

Determine the properties of the data that you want to store:


- Structure—hierarchical, tabular, or unstructured
- Volume—high-scale or average
- Size - maximum size of data to store
- Storage—short-term or long-term storage

Determine how you want to interact with the data:

- Transaction—ACID, OLAP, OLTP
- Operation—Create, Read, Update, Delete
- Latency—How often you must process or update the data for it to be useful

Objects by Data Flow

Data flows into Salesforce from a variety of data sources. With the addition of Data Cloud, data also flows between objects that contain the same data but are of different types. For example, let's say that the data for an account is entered into a Sales org and then ingested into Data Cloud via the CRM connector. Any object that contains data for your org, including standard, custom, or external objects, can use the CRM connector to ingest data into Data Cloud. Other systems also connect to Data Cloud and store account data or metadata inside Data Cloud in their own schemas as Data Lake Objects (DLOs). The different schemas for objects containing account data are mapped to a single Account data model object (DMO) schema and then harmonized into an Account unified data model object.

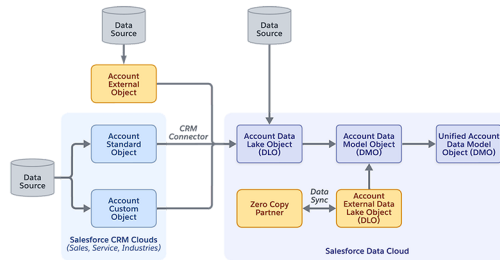


Objects by Data Domain

CRM objects are stored on every org as long as you have a license for the feature that uses them. These objects include standard objects, custom objects, and entity interfaces. Big Objects are available only via licenses or managed packages and are stored differently, but are accessible to any org. Data Cloud objects are stored in Data Cloud and are packaged in data kits. Additional data can be represented in your org, but stored in third-party systems using custom external objects. You can also store data in systems that participate in our zero copy program and query them like native Data Cloud objects.

Data Cloud objects are stored in Data Cloud.

External data is stored outside Salesforce.

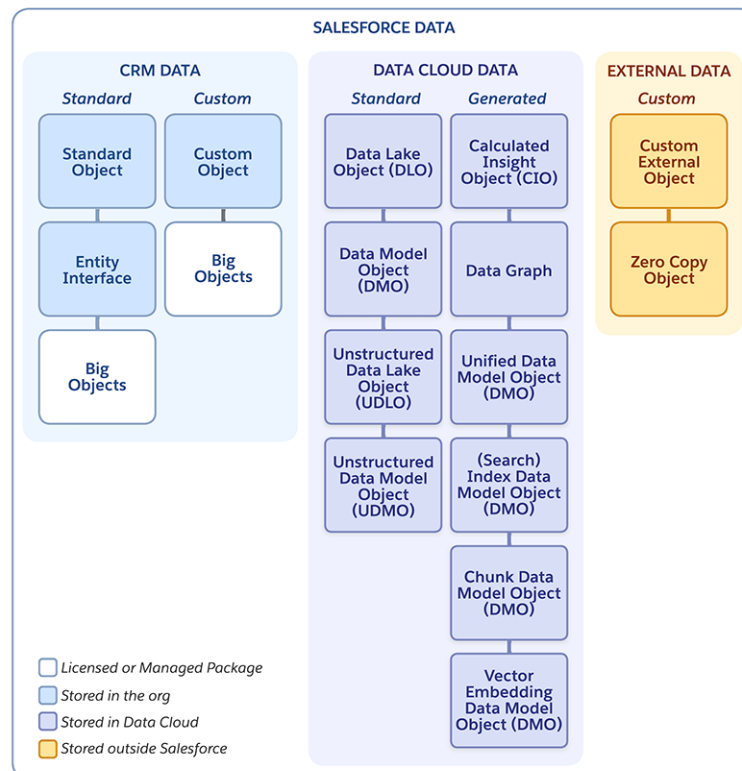


Objects by Transaction Type

For data stored outside Salesforce, the transaction type can't be guaranteed. However, the objects are grouped according to how most data of each type is stored and integrated with Salesforce.

ACID transactions are supported for standard objects, custom objects, entity interfaces, and custom external objects.

OLTP transactions are supported for standard and custom Big Objects.

OLAP transactions are supported for Data Cloud objects.

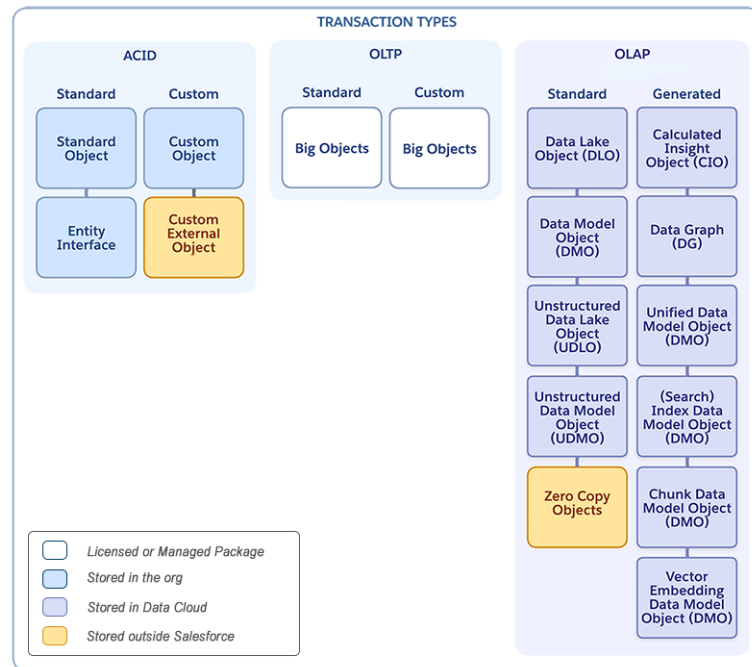

Object Groups

Objects can be grouped in any number of ways. Object groups are based on where data is stored, how it's used, and which licenses are required to access it.

- [Salesforce Common Objects](#)—available for any org
- [Salesforce Cloud Objects](#)—available for specific clouds or features
- [High-Scale Objects](#)—available when purchased for specific clouds
- [External Data](#)—stored outside Salesforce

[Salesforce Common Objects](#)

Common objects are available in any standard org for any cloud. They don't require any special licensing.

[Salesforce Cloud Objects](#)

Cloud objects are used only by a specific cloud. These objects sometimes have different limitations, APIs, or querying behavior than standard common objects.

[Salesforce High-Scale Objects](#)

Use high-scale objects when you have a large number of transactions, large objects, or you must store data over a long period. These objects sometimes have different limitations, APIs, or querying behavior than Salesforce common objects do.

[Salesforce External Data Objects](#)

You can store data outside Salesforce and still access in your org or Data Cloud.

Salesforce Common Objects

Common objects are available in any standard org for any cloud. They don't require any special licensing.

Optimized for: ACID transactions

Object types: Original, Base, and Setup.

Database storage: Relational and transactional database that scales to millions of records

Reference information: *Object Reference for the Salesforce Platform*

Documentation: Documented in Salesforce Help by product

Original Platform Objects

Original platform objects are sometimes called *hero* or *legacy* objects. They're the oldest of the Salesforce objects.

Objects: Account, Contact, Lead, Opportunity

Customizable: Yes

Cloud: Common. These objects are available in any cloud that uses an org.

Packaging: Every form of packaging except data kits. See the Metadata Coverage Report.

Object Examples: [Account](#), [Contact](#), [Lead](#), [Opportunity](#)

Documentation: [Apex Developer Guide](#), [Salesforce DX Developer Guide](#)

Reference: [Object Reference for the Salesforce Platform](#)

Base Platform Objects

Base platform objects (BPOs) are the objects common to most Salesforce orgs that contain data.

Object Examples: [SocialPersona](#)

Customizable: Yes

Cloud: Common. These objects are available on any cloud that uses an org.

Packaging: Every form of packaging except data kits.

Setup Platform Objects

Setup platform objects (SPOs) are the objects common to most Salesforce orgs that contain setup configuration information. Data about the platform is created using org Setup is stored in Setup platform objects.

Object Examples: [CompactLayout](#), [CustomField](#)

Customizable: Yes

Cloud: Common. These objects are available on any cloud that uses an org.

Packaging: The packaging available depends on the cloud, product, and feature that the objects are associated with.

Custom Objects

You can create custom objects and define the schema for the object.

Transaction type: ACID

Object type(s): All custom objects are user defined, so they don't have subtypes.

Object suffix: __c

Customizable: N/A

Cloud: Common

Packaging: Depends on the object.

Object Examples: N/A

Documentation: [Manage Custom Objects](#) in Salesforce Help.

Reference: N/A

Salesforce Cloud Objects

Cloud objects are used only by a specific cloud. These objects sometimes have different limitations, APIs, or querying behavior than standard common objects.

Some Salesforce objects require special licensing or purchase. If an object is included in the *Object Reference for the Salesforce Platform*, the special-access section of the page about the object indicates licensing or purchasing requirements. In most cases, these objects are documented in implementation guides for their cloud, not in the *Object Reference*.

Salesforce High-Scale Objects

Use high-scale objects when you have a large number of transactions, large objects, or you must store data over a long period. These objects sometimes have different limitations, APIs, or querying behavior than Salesforce common objects do.

Big Objects

Usage: Auditing, tracking, feeds, and historical archives.

Transaction Type: OLTP transactions

Database Storage: Horizontally scalable distributed databases that are non-transactional and scale to hundreds of millions or even billions of records. Big objects can contain data that's larger than the data that Data Cloud or standard objects support.

Object Type: BO

Object Suffix: __b

Customizable: Yes

Cloud: Any cloud that provides an org. However, Big Objects requires an additional license.

Packaging: Use the `deploy()` and `retrieve()` calls to deploy and retrieve a .zip file. Standard AppExchange packaging isn't available.

Object Examples: [FieldHistoryArchive](#)

Documentation: [Big Objects Implementation Guide](#)

Reference: [Object Reference for the Salesforce Platform](#)

High-Scale Order Objects

Optimized for: OLTP transactions

Objects: PendingOrderSummary

Documentation: [Order Management Implementation Guide](#)

Reference: [Object Reference for the Salesforce Platform](#)

Data Cloud Objects

Optimized for: OLAP transactions

Object types: DLO, DMO, CIO, DG

Documentation: [Data Object Concepts and Schema in Data Cloud](#)

[Salesforce Data Cloud Objects](#)

Data Cloud objects are high-scale objects that are used to store large amounts of data over time.

Salesforce Data Cloud Objects


Data Cloud objects are high-scale objects that are used to store large amounts of data over time.

Optimized for: OLAP transactions

Object Type(s): DLO, DMO, CIO, DG

Documentation: [Data Object Concepts and Schema in Data Cloud](#) in Salesforce Help


DMO Object Creation

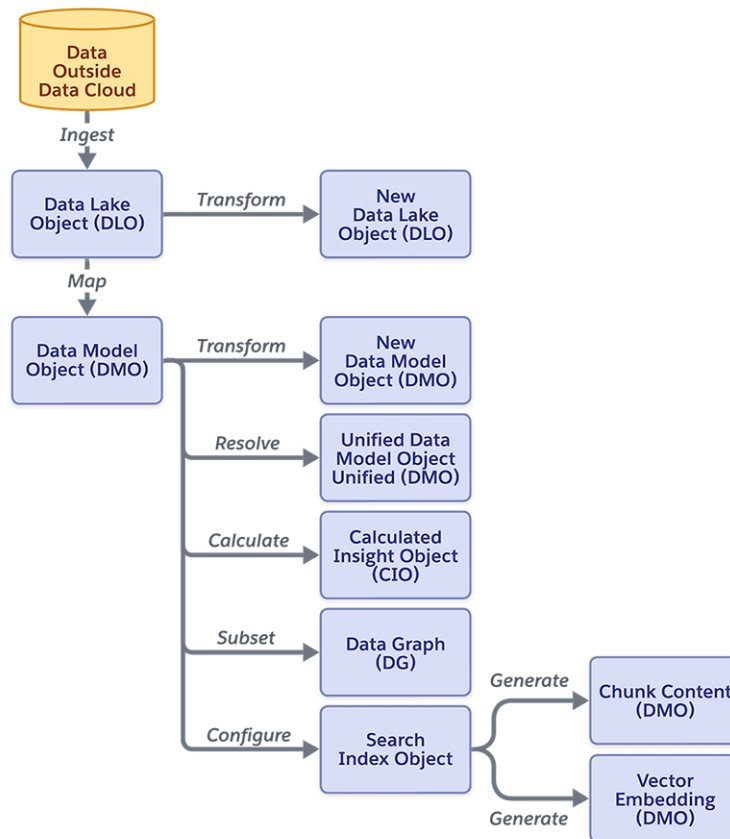

Data Cloud objects are created from ingested data and from various operations on that data. Here's how it works.


1. Data ingested into Data Cloud is stored in data lake objects (DLOs) in the native schema of the system it was created in. Formula fields are also supported for DLOs.
2. Data lake objects are mapped to the schema for data model objects (DMOs), which is the C360 Data Model. data model objects don't store data, only the references to data stored in data lake objects.
3. Data lake objects and data model objects can be transformed into new DLOs and DMOs by using the Data Cloud [data prep and transform feature](#).
4. Data model objects undergo identity resolution to match and resolve data across different records in the same type of DMO and combine the best data from different DMOs in a unified DMO. The unified DMO is often used to create other types of objects, such as data graphs and calculated insights, so it's usually created before other object types. However, it's an optional step.
5. Data in DMOs can be aggregated or calculated to create calculated insight objects (CIOS).
6. A subset of DMO data can also be used as a data graph for faster processing in near real-time transactions with high-scale data.
7. You configure search index objects for DMOs by using the Data Cloud app. These objects aren't DMOs, but they're used to generate DMOs.
8. Search index objects automatically generate chunk-content DMOs and vector-embedding DMOs.

UDMO Object Creation

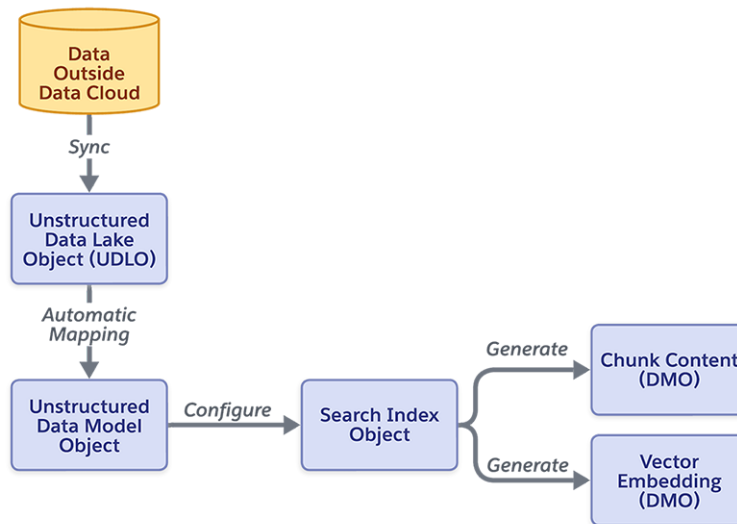

1. Unstructured data ingested into Data Cloud is stored in unstructured data lake objects (UDLOs).
2. Unstructured data lake objects are automatically mapped to the C360 Data Model schema for unstructured data model objects (UDMOs).
3. Configure a search index object on UDMOs and DMOs, so it can be used for Retrieval Augmented Generation (RAG) with Gen AI applications.
4. You can generate chunk content DMOs and vector embedding DMOs from (search) index DMOs.

Zero Copy Object Creation

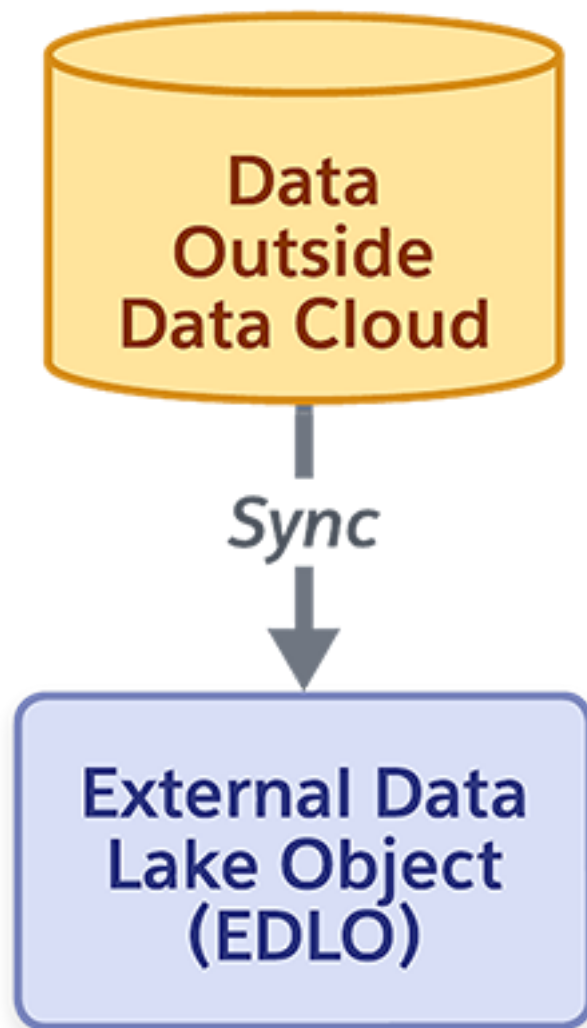

Some external data sources are deeply integrated with Data Cloud, so that you can create a connection that doesn't require data syncing or ingestion. When you share an external data source with Data Cloud, external objects are defined. You configure additional metadata about these objects so you can use the objects with Salesforce features and APIs. For example, you can configure label names that are used in apps and reports.

Calculated Insight Objects (CIO)

Usage: These objects contain data aggregated or calculated from DMO objects.

Customizable: Yes. There are no standard CIOs.

Cloud: Data Cloud.

Packaging: Data kits

Documentation: [Calculated Insights](#) in Salesforce Help

Reference: N/A

Data Lake Objects (DLO)

Usage: Data lake objects are used to store data ingested into Data Cloud.

Object suffix: __dlo.

Customizable: Yes

Cloud: Data Cloud

Packaging: DLOs can be packaged via data kits. Data streams to ingest DLOs can also be packaged.

Documentation: [Data Object Concepts and Schema in Data Cloud](#) in Salesforce Help

Reference: DLO objects can be ingested from any external source and retain the schema from the data stream. Consult the reference documentation for the system you're ingesting the DLO from.

In addition to standard data lake objects, there are also unstructured and external data lake objects.

Data Model Objects (DMO)

Usage: data model objects use the C360 Data Model to provide a common representation of data. Data stored in data lake objects is mapped to data model objects. data model objects don't store data, but they contain information on where data is stored in DLO objects. Data Cloud APIs and features use DMO objects to access data that's stored in data lake objects.

Object suffix: __dlm.

 **Note:** All API Names for DMO object fields have a __c suffix for both standard and custom fields.

Customizable: Yes

Cloud: Data Cloud.

Packaging: Data kits (recommended). Unmanaged packages and managed packages support data kit packaging only from the default data space. However, you can deploy data kits in any data space. It's also possible to import DMOs in unmanaged packages or through comma separated value (CSV) files.

Documentation: [Data Object Concepts and Schema in Data Cloud](#) in Salesforce Help

Reference: data model objects don't have a single reference. Most Salesforce DMOs mirror existing Salesforce base platform objects and original platform objects. A few of these use slightly different data types. Some Salesforce DMOs are referenced in the [Standard Data Model Objects \(DMOs\)](#) section of the *Data Cloud Reference Guide*. However, additional DMO objects are available for specific features or clouds. DMOs are also documented as a part of data kit or bundle mappings.

In addition to data model objects, there are also unified data model objects and unstructured data model objects (UDMO)

Data Graphs (DG)

Usage: You can create a precalculated, materialized view of your data to improve query speed with high-scale data. A data graph contains a JSON blob that combines data structures from multiple DMOs and is used for real-time operations in apps.

Customizable: Yes. All data graphs are customizable. There are no standard data graphs.

Cloud: Data Cloud.

Packaging: Data kits. Data graphs can be added to data kits, but they aren't packageable directly.

Documentation: [Data Graphs](#) in Salesforce Help

Reference: N/A

Unified Objects

Usage: You can create a precalculated, materialized view of your data to improve query speed with high-scale data. A data graph contains a JSON blob that combines data structures from multiple DMOs and is used for real-time operations in apps.

Customizable: Yes. All data graphs are customized. There are no standard data graphs.

Cloud: Data Cloud.

Packaging: Data kits. Data graphs can be added to data kits, but they aren't packageable directly.

Documentation: [Data Graphs](#) in Salesforce Help

Reference: N/A

Unstructured Data Lake Objects (UDLO)

Usage: Unstructured data lake objects (UDLOs) reference unstructured data in Data Cloud. A UDLO is created manually. Unstructured data is ingested from a blob store.

Object suffix: __dlo.

Customizable: Yes

Cloud: Data Cloud

Packaging: Not packageable. UDLOs aren't packaged. However, connections to ingest UDLOs can be packaged.

Documentation: [Unstructured Data Lake Objects](#) in Salesforce Help

Reference: In addition to standard data lake objects, there are also unstructured data lake objects (UDLO) and external data lake objects.

Unstructured Data Model Objects (UDMO)

Usage: Unstructured data model objects represent data created from unstructured data sources.

Object suffix: __dlm.



Note: All API names for DMO object fields have a __c suffix for both standard and custom fields.

Customizable: Yes

Cloud: Data Cloud.

Packaging: Data kits (recommended). It's also possible to import DMOs in unmanaged packages or through CSV files.

Documentation: [Data Object Concepts and Schema in Data Cloud](#) in Salesforce Help

Reference: N/A

Salesforce External Data Objects

You can store data outside Salesforce and still access in your org or Data Cloud.

External Objects

External objects are similar to custom objects, but external object record data is stored outside your org. You can access data in external objects by using OData and other adaptors.

Zero Copy Objects

In some cases, Salesforce is deeply integrated into data stored in other products, such as Snowflake or AWS. In this case, the data is stored outside Salesforce, but it's accessible through Data Cloud.

Salesforce Object Types

In the Salesforce Platform, an object type used to refer to whether an object was standard or custom. A standard object has a schema determined by Salesforce. A custom object has a schema determined or created by you. However, as the platform has continued to evolve, there are now many more types of objects.

The objects in the table are grouped by how objects are identified and accessed in Salesforce. These include objects that are visible via your org or an API, even if they are used for internal purposes.

Suffix	Object Type	Object Group
__b	Big object	High Scale
__c	Custom object	Common
__ChangeEvent	Custom Object Change Event	Common
__chn	PlatformEventChannel	Common
__cio	Calculated insight object	High Scale
__dg	Data graph	High Scale
__DataCategorySelection	Knowledge DataCategorySelection	Common
__dlm	Data Model Object (DMOs used for queries have this extension)	High Scale
__dlo	Data Lake Object	High Scale
__dmo	Data Model Object	High Scale
__dso	Data source object	High Scale
__e	Platform event	Common
__Feed	Knowledge article feed or custom object feed	Common
__hd	Historical data	Common
__History	Field History Tracking for custom objects	Common
__hst	A historical field for a custom report type .	Common
__ka	Knowledge article	Common
__kav	Knowledge article version	Common
__latitude__s	Geolocation custom field with latitude coordinates	Common
__longitude__s	Geolocation custom field with longitude coordinates	Common
__mdt	Custom metadata type	Common
__pc	Custom person account field	Common

__pr	Person account relationship field	Common
__r	Custom relationship field as used in a SOQL query to traverse the relationship	Common
__Share	Custom object sharing object	Common
__Tag	Salesforce tags	Common
__ViewStat	KnowledgeArticleViewStat	Common
__VoteStat	KnowledgeArticleVoteStat	Common
__x	External object	Common
__xo	Salesforce-to-Salesforce (S2S) spoke/proxy object	Common
ChangeEvent	Standard object change event	Common
Feed	Standard object feed	Common

Identifying an Object Type

You can identify an object type by its developer API name. The developer API name is a unique identifier with a standard suffix that indicates the type. You can see platform objects in the Object Manager, along with their suffix. Object Manager shows the object type.

Many different types of Data Cloud objects share the same suffix. To determine the type of a Data Cloud object, view it in Data Cloud [Data Explorer](#) and filter by the object type.

Accessing an Object

Access to an object type is determined by the products and features you're licensed for and relevant user in object permissions. In some cases, you need permissions in multiple clouds to access objects for a feature. For example, you need permission from Data Cloud and your Sales Cloud org to access Data Cloud objects for Data Cloud-powered features in Sales Cloud. The security model for an org is different from the security model of Data Cloud, because objects are stored differently.

Object Cheatsheet

At a glance, see how objects compare to each other.

Object Groups

- Common Objects: Used to store data available in any standard org for any cloud. Optimized for ACID transactions. Relational and transactional database that scales to millions of records.
- High-scale objects: Used for large numbers of transactions and data storage over time
- External Objects: Used to represent data stored outside Salesforce

Object Types

Object Type	Group	Description	Customizable	Cloud	Packaging	Documentation	Reference
Base Platform Objects	common objects	Used for data common to most orgs	Yes	Common	Every form of packaging except data kits	DX and Developer Tools	Object Reference for the Platform
Big Objects	high-scale objects	Used for large transactions and data storage over time	Yes	Any cloud that provides an org	Deploy/retrieve with .zip files; no standard AppExchange packaging	Big Objects Implementation Guide	Object Reference for the Platform
Calculated Insight Objects (CIO)	high-scale objects	Contains data aggregated or calculated from DMOs	Yes	Data Cloud	Data kits	Calculated Insights in Help	N/A
Custom Objects	common objects	User-defined objects	N/A	Common	Depends on the object	Create a Custom Object in Help	N/A
Data Graphs (DG)	high-scale objects	Create a materialized view of data to improve query speed	Yes	Data Cloud	Data kits	Create a Data Graph in Help	N/A
Data Lake Objects (DLO)	high-scale objects	Store data ingested into Data Cloud	Yes	Data Cloud	DLOs and data streams can be packaged via data kits	Data Objects in Data Cloud in Help	Consult the reference documentation for the system storing the data
Data Model Objects (DMO)	high-scale objects	Provide a common representation of data by using C360 data model	Yes	Data Cloud	Data kits (recommended)	Data Objects in Data Cloud in Help	Data Cloud Reference Guide
External Objects	External Objects	Represent data stored outside Salesforce	N/A	N/A	N/A	N/A	N/A
High Scale Order Objects	high-scale objects	Optimized for OLTP transactions	N/A	N/A	N/A	Order Management Implementation Guides in Help	Object Reference for the Platform

Object Type	Group	Description	Customizable	Cloud	Packaging	Documentation	Reference
Setup Platform Objects	common objects	Common objects containing setup configuration information created using Setup	Yes	Common	Depends on the cloud, product, and feature	DX and Developer Tools	Object Reference for the Platform
Unified Objects	high-scale objects	Created as a golden record of data through identity resolution	Yes	Data Cloud	Packageable through data kits	Unify Source Profiles in Help	N/A
Unstructured Data Lake Objects (UDLO)	high-scale objects	References unstructured data in Data Cloud and is created manually	Yes	Data Cloud	No, but connections can be packaged	Unstructured Data Lake Objects in Help	N/A
Unstructured Data Model Objects (UDMO)	high-scale objects	Represents data from unstructured data sources	Yes	Data Cloud	Data kits (recommended)	Data Objects in Data Cloud in Help	N/A
Zero Copy Objects	External objects	Deep integration with external data sources, so no data syncing required	N/A	N/A	N/A	N/A	N/A

CHAPTER 3 Associated Objects (Feed, History, OwnerSharingRule, Share, and ChangeEvent Objects)

This section provides a list of objects associated to standard objects and their standard fields.

Some fields may not be listed for some objects. To see the system fields for each object, see [System Fields](#).

To verify the complete list of fields for an object, use a describe call from the API or inspect with an appropriate tool. For example, inspect the WSDL or use a schema viewer.

[StandardObjectName Feed Feed](#)

StandardObjectNameFeed is the model for all feed objects associated with standard objects. These objects represent the posts and feed-tracked changes of a standard object.

[StandardObjectName History History](#)

StandardObjectNameHistory is the model for all history objects associated with standard objects. These objects represent the history of changes to the values in the fields of a standard object.

[StandardObjectName OwnerSharingRule OwnerSharingRule](#)

StandardObjectNameOwnerSharingRule is the model for all owner sharing rule objects associated with standard objects. These objects represent a rule for sharing a standard object with users other than the owner.

[StandardObjectName Share](#)

StandardObjectNameShare is the model for all share objects associated with standard objects. These objects represent a sharing entry on the standard object.

[StandardObjectNameChangeEvent](#)

A *ChangeEvent* object is available for each object that supports Change Data Capture. You can subscribe to a stream of change events using Change Data Capture to receive data tied to record changes in Salesforce. Changes include record creation, updates to an existing record, deletion of a record, and undeletion of a record. A change event isn't a Salesforce object—it doesn't support CRUD operations or queries. It's included in the object reference so you can discover which Salesforce objects support change events.

StandardObjectName Feed Feed

StandardObjectNameFeed is the model for all feed objects associated with standard objects. These objects represent the posts and feed-tracked changes of a standard object.

The object name is variable and uses *StandardObjectNameFeed* syntax. For example, *AccountFeed* represents the posts and feed-tracked changes on an account record. We list the available associated feed objects at the end of this topic. For specific version information, see the documentation for the standard object.

Supported Calls

`delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

In the internal org, users can delete all feed items they created. This rule varies in Experience Cloud sites where threaded discussions and delete-blocking are enabled. Site members can delete all feed items they created, provided the feed items don't have content nested under them—like a comment, answer, or reply. Where the feed item has nested content, only feed moderators and users with the Modify All Data permission can delete threads.

To delete feed items they didn't create, users must have one of these permissions:

- Modify All Data
- Modify All Records on the parent object, like Account for AccountFeed
- Moderate Chatter



Note: Users with the Moderate Chatter permission can delete only the feed items and comments they can see.

Only users with this permission can delete items in unlisted groups.

For more special access rules, if any, see the documentation for the standard object. For example, for AccountFeed, see the special access rules for Account.

Fields

Field	Details
BestCommentId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the comment marked as best answer on a question post. This field is available in API version 44.0 and later.
Body	Type textarea Properties Nillable, Sort Description The body of the post. Required when <code>Type</code> is <code>TextPost</code>. Optional when <code>Type</code> is <code>ContentPost</code> or <code>LinkPost</code>.
CommentCount	Type int Properties Filter, Group, Sort

Field	Details
	Description The number of comments associated with this feed item.  Tip: In a feed that supports pre-moderation, <code>CommentCount</code> isn't updated until a comment is published. For example, say that you comment on a post that already has one published comment and your comment triggers moderation. Now there are two comments on the post, but the count says there's only one. In a moderated feed, comments aren't counted until approved by an admin or someone with <code>Can Approve Feed Post and Comment</code> or <code>Modify All Data</code>. Feed moderation has implications on how you retrieve feed comments. In a moderated feed, rather than retrieving comments by looping through <code>CommentCount</code>, go through pagination until the end of comments is returned.
ConnectionId	Type reference Properties Filter, Group, Nillable, Sort Description When a <code>PartnerNetworkConnection</code> modifies a record that is tracked, the <code>CreatedBy</code> field contains the ID of the system administrator. The <code>ConnectionId</code> contains the ID of the <code>PartnerNetworkConnection</code>. Available if Salesforce to Salesforce is enabled for your organization.
ContentData	Type base64 Properties Nillable Description Available in API version 36.0 and earlier only. Required if <code>Type</code> is <code>ContentPost</code>. Encoded file data in any format, and can't be 0 bytes. Setting this field automatically sets <code>Type</code> to <code>ContentPost</code>. Only visible when <code>Type</code> is set to <code>ContentPost</code>.
ContentDescription	Type textarea Properties Nillable, Sort Description Available in API version 36.0 and earlier only. The description of the file specified in <code>ContentData</code>. Only visible when <code>Type</code> is set to <code>ContentPost</code>.
ContentFileName	Type string

Field	Details
	Properties Group, Nillable, Sort Description Available in API version 36.0 and earlier only. This field is required if <code>Type</code> is <code>ContentPost</code>. The name of the file uploaded to the feed. Setting <code>ContentFileName</code> automatically sets <code>Type</code> to <code>ContentPost</code>. Only visible when <code>Type</code> is set to <code>ContentPost</code>.
ContentSize	Type int Properties Group, Nillable, Sort Description Available in API version 36.0 and earlier. The size of the file (in bytes) uploaded to the feed. This field is read-only and is automatically determined during insert. Only visible when <code>Type</code> is set to <code>ContentPost</code>.
ContentType	Type string Properties Group, Nillable, Sort Description Available in API version 36.0 and earlier. The MIME type of the file uploaded to the feed. This field is read-only and is automatically determined during insert. Only visible when <code>Type</code> is set to <code>ContentPost</code>.
FeedPostId	Type reference Properties Filter, Group, Nillable, Sort Description This field was removed in API version 22.0, and is available in earlier versions for backward compatibility only. ID of the associated FeedPost. A FeedPost represents the following types of changes in a feed item: changes to tracked fields, text posts, link posts, and content posts.
InsertedById	Type reference Properties Group, Nillable, Sort

59

Field	Details
LinkUrl	Type url Properties Nillable, Sort Description The URL of a LinkPost.
NetworkScope	Type picklist Properties Group, Nillable, Restricted picklist, Sort Description Specifies whether this feed item is available in the default Experience Cloud site, a specific Experience Cloud site, or all sites. This field is available in API version 26.0 and later, if digital experiences is enabled for your org. NetworkScope can have the following values: • NetworkId—The ID of the Experience Cloud site in which the FeedItem is available. If left empty, the feed item is only available in the default Experience Cloud site. • AllNetworks—The feed item is available in all Experience Cloud sites. Note the following exceptions for NetworkScope: • Only feed items with a Group or User parent can set a NetworkId or a null value for NetworkScope. • For feed items with a record parent, users can set NetworkScope only to AllNetworks. • You can't filter a feed item on the NetworkScope field.
ParentId	Type reference Properties Filter, Group, Sort Description ID of the record that is tracked in the feed. The detail page for the record displays the feed.
RelatedRecordId	Type reference Properties Group, Nillable, Sort Description ID of the ContentVersion record associated with a ContentPost. This field is null for all posts except ContentPost.

Field	Details
Title	Type string Properties Group, Nillable, Sort Description The title of the feed item. When the <code>Type</code> is <code>LinkPost</code>, the <code>LinkUrl</code> is the URL and this field is the link name.
Type	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of feed item: • <code>ActivityEvent</code>—indirectly generated event when a user or the API adds a Task associated with a feed-enabled parent record (excluding email tasks on cases). Also occurs when a user or the API adds or updates a <code>Task</code> or Event associated with a case record (excluding email and call logging). For a recurring <code>Task</code> with <code>CaseFeed</code> disabled, one event is generated for the series only. For a recurring <code>Task</code> with <code>CaseFeed</code> enabled, events are generated for the series and each occurrence. • <code>AdvancedTextPost</code>—created when a user posts a group announcement and, in Lightning Experience as of API version 39.0 and later, when a user shares a post. • <code>AnnouncementPost</code>—Not used. • <code>ApprovalPost</code>—generated when a user submits an approval. • <code>BasicTemplateFeedItem</code>—Not used. • <code>CanvasPost</code>—a post made by a canvas app posted on a feed. • <code>CollaborationGroupCreated</code>—generated when a user creates a public group. • <code>CollaborationGroupUnarchived</code>—Not used. • <code>ContentPost</code>—a post with an attached file. • <code>CreatedRecordEvent</code>—generated when a user creates a record from the publisher. • <code>DashboardComponentAlert</code>—generated when a dashboard metric or gauge exceeds a user-defined threshold. • <code>DashboardComponentSnapshot</code>—created when a user posts a dashboard snapshot on a feed. • <code>LinkPost</code>—a post with an attached URL. • <code>PollPost</code>—a poll posted on a feed. • <code>ProfileSkillPost</code>—generated when a skill is added to a user's Chatter profile. • <code>QuestionPost</code>—generated when a user posts a question. • <code>ReplyPost</code>—generated when Chatter Answers posts a reply.

Field	Details
	• <code>RypplePost</code>—generated when a user creates a Thanks badge in WDC. • <code>TextPost</code>—a direct text entry on a feed. • <code>TrackedChange</code>—a change or group of changes to a tracked field. • <code>UserStatus</code>—automatically generated when a user adds a post. Deprecated. The following values appear in the <code>Type</code> picklist for all feed objects but apply only to <code>CaseFeed</code>: • <code>CaseCommentPost</code>—generated event when a user adds a case comment for a case object • <code>EmailMessageEvent</code>—generated event when an email related to a case object is sent or received • <code>CallLogPost</code>—generated event when a user logs a call for a case through the user interface. CTI calls also generate this event. • <code>ChangeStatusPost</code>—generated event when a user changes the status of a case • <code>AttachArticleEvent</code>—generated event when a user attaches an article to a case  Note: If you set <code>Type</code> to <code>ContentPost</code>, also specify <code>ContentData</code> and <code>ContentFileName</code>.
Visibility	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Specifies whether this feed item is available to all users or internal users only. This field is available in API version 26.0 and later, if digital experiences is enabled for your organization. <code>Visibility</code> can have the following values: • <code>AllUsers</code>—The feed item is available to all users who have permission to see the feed item. • <code>InternalUsers</code>—The feed item is available to internal users only. Note the following exceptions for <code>Visibility</code>: • For record posts, <code>Visibility</code> is set to <code>InternalUsers</code> for all internal users by default. • External users can set <code>Visibility</code> only to <code>AllUsers</code>. • On user and group posts, only internal users can set <code>Visibility</code> to <code>InternalUsers</code>.

Usage

A feed for an object is automatically created when a user enables feed tracking for the object. Use feeds to track changes to records. For example, `AccountFeed` tracks changes to an account record. Use feed objects to retrieve the content of feed fields, such as type of feed or feed ID.

- NewsFeed and UserProfileFeed are available in API version 18.0 through API version 26.0. In API version 27.0 and later, NewsFeed and UserProfileFeed are no longer available in SOAP API. Use Connect REST API to access NewsFeed and UserProfileFeed.

Use the NewsFeed object to query and retrieve lead feed items associated with a converted lead record.

- For NewsFeed and UserProfileFeed, users who don't have the View All Data permission have the following limitations when querying records: Must specify a LIMIT clause and the limit must be less than or equal to 1000. Can include a WHERE clause that references object fields, but can't include references to fields in related objects. For example, you can filter by CreatedDate or ParentId, but not by Parent.Name. Can include an ORDER BY clause that references object fields, but can't include references to fields in related objects. For example, ORDER BY CreatedDate or ParentId, but not by Parent.Name. To query for the most recent feed items, ORDER BY CreatedDate DESC, Id DESC.

Note the following SOQL restrictions. No SOQL limit if logged-in user has View All Data permission. If not, specify a LIMIT clause of 1,000 records or fewer. SOQL ORDER BY on fields using relationships isn't available. Use ORDER BY on fields on the root object in the SOQL query.

- The name *Article Type__Feed* is variable, where *Article Type* is the object name for the article type associated with the article. For example, *Offer__Feed* represents a feed on an article of type *Offer*.
- Field Service must be enabled in your organization for ServiceAppointmentFeed, ServiceCrewFeed, ServiceMemberFeed, ServiceResourceCapacityFeed, ServiceResourceFeed, ServiceResourceSkillFeed, ServiceTerritoryFeed, ServiceTerritoryMemberFeed, and SkillRequirementFeed.
- For WorkOrderFeed, Work Orders or Field Service must be enabled in your organization.
- On UserFeed, if you use the FeedComment object to comment on a user record, the user can delete the comment. For example, if John Smith adds a comment to the feed on Sasha Jones' user record, Sasha can delete the comment.

StandardObjectName History History

StandardObjectNameHistory is the model for all history objects associated with standard objects. These objects represent the history of changes to the values in the fields of a standard object.

The object name is variable and uses *StandardObjectNameHistory* syntax. For example, AccountHistory represents the history of changes to the values of an account record's fields. We list the available associated history objects at the end of this topic. For specific version information, see the documentation for the standard object.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Special Access Rules

For specific special access rules, if any, see the documentation for the standard object. For example, for AccountHistory, see the special access rules for Account.

Fields

Field Name	Details
<i>StandardObjectId</i>	Type reference Properties Filter, Group, Sort Description ID of the standard object.
<i>DataType</i>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Data type of the field that was changed.
<i>Field</i>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Name of the field that was changed.
<i>NewValue</i>	Type anyType Properties Nillable, Sort Description New value of the field that was changed.
<i>OldValue</i>	Type anyType Properties Nillable, Sort Description Old value of the field that was changed.

StandardObjectName OwnerSharingRule OwnerSharingRule

StandardObjectNameOwnerSharingRule is the model for all owner sharing rule objects associated with standard objects. These objects represent a rule for sharing a standard object with users other than the owner.

The object name is variable and uses *StandardObjectNameOwnerSharingRule* syntax. For example, *ChannelProgramOwnerSharingRule* is a rule for sharing a channel program with users other than the channel program owner. The available associated owner sharing rule objects are listed at the end of this topic. For specific version information, see the standard object documentation.

 **Note:** To enable access to this object, contact Salesforce customer support. But we recommend that you use Metadata API to programmatically update owner sharing rules instead because it triggers automatic sharing rule recalculation. The [SharingRules](#) Metadata API type is enabled for all orgs.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

For specific special access rules, if any, see the documentation for the standard object. For example, for *ChannelProgramOwnerSharingRule*, see the special access rules for *ChannelProgram*.

Fields

Field Name	Details
AccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Determines the level of access users have to records. Values are: - Read (read only) - Edit (read/write)
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Description of the sharing rule. Maximum length is 1,000 characters.

Field Name	Details
DeveloperName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package, and the changes are reflected in a subscriber's organization.  Note: When creating large sets of data, always specify a unique DeveloperName for each record. If no DeveloperName is specified, performance can slow while Salesforce generates one for each record.
GroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the source group. Records that are owned by users in the source group trigger the rule to give access.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Label of the sharing rule as it appears in the UI. Maximum length is 80 characters.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the user or group that you're granting access to.

StandardObjectName Share

StandardObjectNameShare is the model for all share objects associated with standard objects. These objects represent a sharing entry on the standard object.

The object name is variable and uses *StandardObjectNameShare* syntax. For example, *AccountBrandShare* is a sharing entry on an account brand. For specific version information, see the standard object documentation.

You can only create, edit, and delete sharing entries for standard objects whose *RowCause* field is set to *Manual*. Sharing entries for standard objects with different *RowCause* values are created as a result of your Salesforce org's sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren't stored at all.



Note: While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it's possible that we'll stop storing certain share records to improve performance. As a best practice, don't create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

For specific special access rules, if any, see the documentation for the standard object. For example, for *AccountBrandShare*, see the special access rules for *AccountBrand*.

Fields

Field Name	Details
<code>AccessLevel</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The level of access allowed. Values are: • <code>All</code> (owner) • <code>Edit</code> (read/write) • <code>Read</code> (read only)
<code>ParentId</code>	Type reference Properties Create, Filter, Group, Sort Description ID of the parent record.

Field Name	Details
RowCause	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Reason that the sharing entry exists.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the user or group that has been given access to the object.

StandardObjectNameChangeEvent

A ChangeEvent object is available for each object that supports Change Data Capture. You can subscribe to a stream of change events using Change Data Capture to receive data tied to record changes in Salesforce. Changes include record creation, updates to an existing record, deletion of a record, and undeletion of a record. A change event isn't a Salesforce object—it doesn't support CRUD operations or queries. It's included in the object reference so you can discover which Salesforce objects support change events.

Supported Calls

`describeSObjects()`

Special Access Rules

- All objects may not be available in your org. Some objects require specific feature settings and permissions to be enabled.
- For more special access rules, if any, see the documentation for the standard object. For example, for AccountChangeEvent, see the special access rules for Account.

Change Event Support

Change events are available for all custom objects and a subset of standard objects. Change events that correspond to custom settings are partially supported. They aren't supported in Apex triggers but are supported in other types of subscribers. For more information about standard object support, see the Objects That Support Change Events section below.

Change Event Name

The name of a change event is based on the name of the corresponding object for which it captures the changes.

Standard Object Change Event Name

```
<Standard_Object_Name>ChangeEvent
```

Example: AccountChangeEvent

Custom Object Change Event Name

```
<Custom_Object_Name>__ChangeEvent
```

Example: MyCustomObject__ChangeEvent

Change Event Fields

The fields that a change event can include correspond to the fields on the associated parent Salesforce object, with a few exceptions. For example, AccountChangeEvent fields correspond to the fields on Account.

The fields that a change event doesn't include are:

- The `IsDeleted` system field.
- The `SystemModStamp` system field.
- Any field whose value isn't on the record and is derived from another record or from a formula, except roll-up summary fields, which are included. Examples are formula fields. Examples of fields with derived values include `LastActivityDate` and `PhotoUrl`.

Each change event also contains header fields. The header fields are included inside the `ChangeEventHeader` field. They contain information about the event, such as whether the change was an update or delete and the name of the object, like Account.

In addition to the event payload, the event schema ID is included in the `schema` field. Also included is the event-specific field, `replayId`, which is used for retrieving past events.

Event Message Example

This example is an event message in JSON format for a new account record creation.

```
{
  "schema": "IeRuaY6cbI_HsV8Rv1Mc5g",
  "payload": {
    "ChangeEventHeader": {
      "entityName": "Account",
      "recordIds": [
        "<record_ID>"
      ],
      "changeType": "CREATE",
      "changeOrigin": "com/salesforce/api/soap/51.0;client=SfdcInternalAPI/",
      "transactionKey": "0002343d-9d90-e395-ed20-cf416ba652ad",
      "sequenceNumber": 1,
      "commitTimestamp": 1612912679000,
      "commitNumber": 10716283339728,
      "commitUser": "<User_ID>"
    },
    "Name": "Acme",
    "Description": "Everyone is talking about the cloud. But what does it mean?",
    "OwnerId": "<Owner_ID>",
    "CreatedDate": "2021-02-09T23:17:59Z",
    "CreatedById": "<User_ID>",
```

```

    "LastModifiedDate": "2021-02-09T23:17:59Z",
    "LastModifiedById": "<User_ID>"
  },
  "event": {
    "replayId": 6
  }
}

```

API Version and Schema

When you subscribe to change events, the subscription uses the latest API version and the event messages received reflect the latest field definitions. For more information, see [API Version and Event Schema](#) in the *Change Data Capture Developer Guide*.

Usage

For more information about Change Data Capture, see [Change Data Capture Developer Guide](#).

Objects That Support Change Events

These objects have associated ChangeEvent objects.

- Account (including Person Account)
- AccountCleanInfo
- AccountContactRelation
- AccountContactRole
- ActionCadence
- ActionCadenceStep
- ActionCadenceStepTracker
- ActionCadenceTracker
- AdOrderLineAdTarget
- AdProductTargetCategory
- AdQuoteLineAdTarget
- AdTargetCategory
- AdTargetCategorySegment
- AgentWork
- AgentWorkSkill
- AppExtension
- Asset
- AssetWarranty
- AssetRelationship
- AssignedResource
- AssociatedLocation
- AuthorizationForm
- AuthorizationFormConsent

- AuthorizationFormDataUse
- AuthorizationFormText
- Automotive Cloud. Some objects are supported. See [StandardObjectNameChangeEvent](#) in the *Automotive Cloud Developer Guide*.
- BriefcaseAssignment
- BriefcaseDefinition
- BroadcastTopicNetwork
- BusinessBrand
- CalendarView
- CallTemplate
- Campaign
- CampaignMember
- CampaignMemberStatus
- CartDeliveryGroup
- CartItem
- CartItemPriceAdjustment
- CartTax
- CartValidationOutput
- Case
- CaseRelatedIssue
- ChangeRequest
- ChangeRequestRelatedIssue
- ChangeRequestRelatedItem
- CollaborationGroupRecord
- CollabTemplateMetric
- CommerceEntitlementBuyerGroup
- CommerceEntitlementPolicy
- CommerceEntitlementProduct
- CommSubscription
- CommSubscriptionChannelType
- CommSubscriptionConsent
- CommSubscriptionTiming
- ConferenceNumber
- Consumer Goods Cloud. Some objects are supported. See [StandardObjectNameChangeEvent](#) in the *Consumer Goods Cloud Developer Guide*.
- Contact
- ContactCleanInfo
- ContentDocument
- ContentDocumentLink
- ContentFolder
- ContactPointAddress

- ContactPointConsent
- ContactPointEmail
- ContactPointPhone
- ContactPointTypeConsent
- ContentVersion
- Contract
- ContractLineItem
- Conversation Reason objects: ConversationContextEntry, ConversationReason, ConversationReasonExcerpt, and ConversationReasonGroup. See [Einstein Conversation Insights](#) in *Salesforce Help*.
- Coupon
- CustomFieldDisplayValue
- DataUseLegalBasis
- DataUsePurpose
- DigitalSignature
- DynamicDataCapture
- EmailMessage
- EmailTemplate
- EngagementAttendee
- EngagementChannelType
- EngagementInteraction
- EngagementTopic
- Entitlement
- Event
- EventRelation
- Expense
- ExternalClientAppSettings
- ExternalEvent
- FieldServiceMobileSettings
- Financial Services Cloud. Some objects are supported. See [StandardObjectNameChangeEvent](#) in the *Financial Services Cloud Developer Guide*.
- FlowRecord
- FlowRecordElement
- FlowRecordVersion
- FlowOrchestration
- FlowOrchestrationVersion
- ForecastingOwnerAdjustment
- FulfillmentOrderItemTax
- Health Cloud. Some objects are supported. See [StandardObjectNameChangeEvent](#) in the *Salesforce Health Cloud Developer Guide*.
- Incident Related Item
- Individual

- LandingPage
- Lead
- LinkedArticle
- ListEmail
- LiveAgentSession
- LiveChatTranscript
- LiveChatTranscriptEvent
- LiveChatVisitor
- Location
- LocationGroup
- LocationGroupAssignment
- Loyalty Management. Some objects are supported. See [StandardObjectNameChangeEvent](#) in the *Loyalty Management Developer Guide*.
- Macro
- MacroInstruction
- MaintenanceAsset
- MaintenancePlan
- ManagedContent
- Manufacturing Cloud. Some objects are supported. See [StandardObjectNameChangeEvent](#) in the *Manufacturing Cloud Developer Guide*.
- MarketingForm
- MarketingLink
- MarketSegmentActivation
- MerchantAccount
- MessagingEndUser
- MessagingSession
- Mortgage loan applicant and application objects. See [Mortgage Lending Objects Supported by Out-of-the-Box Components and Pages in Experience Builder Templates](#) in the *Financial Services Cloud Administrator Guide*.
- Net Zero Cloud. Some objects are supported. See [StandardObjectNameChangeEvent](#) in the *Net Zero Cloud Developer Guide*.
- Nonprofit Cloud. Some objects are supported. See [StandardObjectNameChangeEvent](#) in the *Nonprofit Cloud Developer Guide*.
- ObjectDataImport
- ObjectRelatedUrl
- OperatingHours
- Opportunity
- OpportunityContactRole
- OpportunityLineItem
- OpportunitySplit
- Order
- OrderAdjustmentGroupSummary
- OrderDeliveryGroupSummary
- OrderDeliveryMethod

- OrderItem
- OrderItemSummary
- OrderItemSummaryChange
- OrderItemTaxLineItemSummary
- OrderPaymentSummary
- OrderSummary
- PartyConsent
- PaymentPage
- PendingServiceRouting
- Pricebook2
- PricebookEntry
- ProblemIncident
- ProblemRelatedItem
- ProcessException
- ProcessInstance
- ProcessInstanceStep
- Product2
- ProductCategory
- ProductConsumed
- ProductFeaturedProduct
- ProductItem
- ProductMedia
- ProductRequest
- ProductRequestLineItem
- ProductTransfer
- ProductWarrantyTerm
- ProfileSkillEndorsement
- Public Sector Solutions. Some objects are supported. See [StandardObjectNameChangeEvent](#) in the *Public Sector Solutions Developer Guide*.
- QuickText
- QuickTextUsage
- Quote
- QuoteLineItem
- Recommendation
- RecordAggregationResult
- RecordSetFilterCriteria
- RecordSetFilterCriteriaRule
- ResourceAbsence
- ResourcePreference
- ReturnOrder

- ReturnOrderItemAdjustment
- ReturnOrderItemTax
- ReturnOrderLineItem
- SalesChannel
- ServiceAppointment
- ServiceContract
- ServiceCrew
- ServiceCrewMember
- ServiceResource
- ServiceResourceCapacity
- ServiceResourceSkill
- ServiceReport
- ServiceReportLayout
- ServiceTerritory
- ServiceTerritoryLocation
- ServiceTerritoryMember
- Shift
- ShiftPattern
- ShiftPatternEntry
- Shipment
- SkillRequirement
- SocialPost
- Survey
- SurveyInvitation
- SurveyPage
- SurveyQuestion
- SurveyQuestionChoice
- SurveyQuestionResponse
- SurveyResponse
- SurveySubject
- SurveyVersion
- TenantEntitlementTransaction
- TenantSecurityAlertRuleSelectedTenant
- TenantSecurityApiAnomaly
- TenantSecurityConnectedApp
- TenantSecurityCredentialStuffing
- TenantSecurityFeature
- TenantSecurityHealthCheckBaselineTrend
- TenantSecurityHealthCheckData
- TenantSecurityHealthCheckTrend

- TenantSecurityTenantInfo
- TenantSecurityLicense
- TenantSecurityLogin
- TenantSecurityLoginIpRangeTrend
- TenantSecurityMobilePolicyTrend
- TenantSecurityMonitorMetric
- TenantSecurityNotification
- TenantSecurityNotificationRule
- TenantSecurityPackage
- TenantSecurityPolicy
- TenantSecurityPolicyDeployment
- TenantSecurityPolicySelectedTenant
- TenantSecurityReportAnomaly
- TenantSecuritySessionHijacking
- TenantSecurityTransactionPolicyTrend
- TenantSecurityTrustedIpRangeTrend
- TenantSecurityUserActivity
- TenantSecurityUserPerm
- TenantUsageTypeMultiplier
- Territory2AlignmentLog
- Territory2Model
- TimeSheet
- TimeSheetEntry
- TimeSlot
- Task
- TodayGoal
- TaskRelation
- User (including partner users)
- UserAppInfo
- UserEmailPreferredPerson
- UserServicePresence
- VideoCall
- VideoCallParticipant
- VideoCallRecording
- VoiceCall
- VoiceCallRecording
- WarrantyTerm
- WaveAutoInstallRequest
- WebCart
- WebCartAdjustmentBasis

Associated Objects (Feed, History, OwnerSharingRule, Share, and ChangeEvent Objects)

StandardObjectNameChangeEvent

- WebCartAdjustmentGroup
- WorkAccess
- WorkBadge
- WorkBadgeDefinition
- WorkCapacityLimit
- WorkPlan
- WebStore
- WebStoreBuyerGroup
- WebStoreSearchProdSettings
- WorkOrder
- WorkOrderLineItem
- WorkThanks
- WorkType

CHAPTER 4 Custom Objects

This section provides details on custom objects, entities that support custom objects, and their standard fields.

When you create or enable features for a custom object, Salesforce creates entities to support your custom object. For example, when you enable sharing rules for a custom object, Salesforce creates a *MyObjectName__Share* object.

To verify the complete list of fields for an object or entity, you can use a describe call from the API, or inspect with an appropriate tool, for example, inspecting the WSDL or using a schema viewer.

[FSL__Time_Dependency__c](#)

Represents a dependency between two service appointments. This object is used to define scheduling relationships between two appointments. It allows you to determine the order and timing in which dependent appointments should be scheduled.

[Custom Metadata Type __mdt __mdt](#)

Represents a custom metadata record. This object is available in API version 34.0 and later.

[Custom Object __c __c](#)

Represents a custom object.

[Custom Object __Feed __Feed](#)

Represents the feed, specifically posts and feed-tracked changes, on a custom object.

FSL__Time_Dependency__c

Represents a dependency between two service appointments. This object is used to define scheduling relationships between two appointments. It allows you to determine the order and timing in which dependent appointments should be scheduled.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available in orgs that have the Field Service managed package installed. Records of this object are subject to standard sharing and security settings.

Fields

Field	Details
FSL__Dependency__c	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The type of the dependency. Possible values are: • Immediately Follow • Same Start • Start After Finish • Start After Finish And Same Day The default value is Same Start.
FSL__Root_Service_Appointment__c	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The service appointment that's the root appointment of the entire dependency chain. The root appointment is the same service appointment for all the dependencies in the chain. This field is automatically populated by the system when creating a dependency. When creating a dependency via API, the API user must have permissions for this field. We recommend leaving this field empty when a dependency is created and avoiding any custom modifications. This field is a relationship field. Relationship Name FSL__Root_Service_Appointment__r Relationship Type Lookup Refers To ServiceAppointment
FSL__Same_Resource__c	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description An indication of whether the two service appointments that share a dependency should be assigned to the same service resource.

Field	Details
	The default value is <code>false</code> .
FSL__Service_Appointment_1__c	Type reference Properties Create, Filter, Group, Sort Description The first service appointment on which the second service appointment is dependent. This field is a relationship field. Relationship Name FSL__Service_Appointment_1__r Relationship Type Master-detail Refers To ServiceAppointment (the master object)
FSL__Service_Appointment_2__c	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The second service appointment that's dependent on the first service appointment. This field is a relationship field. Relationship Name FSL__Service_Appointment_2__r Relationship Type Lookup Refers To ServiceAppointment
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-generated unique identifier for the appointment dependency record.

Custom Metadata Type __mdt __mdt

Represents a custom metadata record. This object is available in API version 34.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

The object name is a variable with the syntax *Custom Metadata Type__mdt*, where *Custom Metadata Type* is the `ObjectName` for the custom metadata type associated with the custom metadata record. For example, `PicklistUsage__mdt` represents a custom metadata record based on the `PicklistUsage` custom metadata type.

Supported Calls

`describeSObjects()`, `describeLayout()`, `query()`, `retrieve()`

Fields

Field	Details
<code>Custom Field__c</code>	Type Any Type Properties Filter, Group, Nillable, Sort Description A custom field on the record.
<code>DeveloperName</code>	Type string Properties Defaulted on create, Filter, Group, Sort Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.
<code>isProtected</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description When a custom metadata type's records are released in a managed package, access to them is limited in specific ways. • Code that's in the same managed package as custom metadata records can read the records. • Code that's in the same managed package as custom metadata types can read the records that belong to that type.

Field	Details
	- Code that's in a managed package that doesn't contain either the type or the protected record can't read the protected records. - Code that the subscriber creates and code that's in an unmanaged package can't read the protected records. - The developer can modify protected records only with a package upgrade. The subscriber can't read or modify protected records. The developer name of a protected record can't be changed after release. Records that are hidden by these access rules are also unavailable to REST, SOAP, SOQL, and Setup.
Label	Type picklist Properties Filter, Group, Nillable, Sort Description The custom metadata record label. This label value is always the same as the <code>MasterLabel</code> value.
Language	Type string Properties Filter, Group, restrictedPicklist, Sort Description The language of the custom metadata record. This value is always the default language of the developing organization.
MasterLabel	Type string Properties Filter, Group, Sort Description The primary label for the custom metadata record.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation.

Field	Details
QualifiedApiName	Type string Properties Filter, Group, Nillable, Sort Description A concatenation of the namespace prefix and developer name. The format is <i>NamespacePrefix__DeveloperName</i>.
SystemModStamp	Type dateTime Properties Defaulted on create, Filter, Sort Description Date and time when a user or automated process such as a trigger last modified this record. In this context, trigger refers to Salesforce code that runs to implement standard functionality, and not an Apex trigger. This field is available in API version 56.0 and later.

SEE ALSO:

[System Fields](#)[Field Types](#)[API Field Properties](#)

Custom Object __c __c

Represents a custom object.

The custom object name is a variable with the syntax `Custom_Object__c`, where `Custom_Object` is the object's Name associated with the record, followed by two underscores and `c`. For example, a custom object labeled "Issue" in the Salesforce user interface is `Issue__c` in that organization's WSDL.

System fields and properties behave the same on custom objects as they do on standard objects, unless otherwise noted in the following details.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ConnectionReceivedId	Type reference Properties Filter, Nillable Description ID of the PartnerNetworkConnection that shared this record with your organization. This field is available if you enabled Salesforce to Salesforce.
ConnectionSentId	Type reference Properties Filter, Nillable Description ID of the PartnerNetworkConnection that you shared this record with. This field is available if you enabled Salesforce to Salesforce. This field is supported using API versions earlier than 15.0. In all other API versions, this field's value is null. You can use the new PartnerNetworkRecordConnection object to forward records to connections.
CreatedById	Type reference Properties Aggregatable, Defaulted on create, Filter, Group, Sort Description ID of the User who created this record.
CreatedDate	Type dateTime Properties Aggregatable, Defaulted on create, Filter, Sort Description Date and time when this record was created.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.

Field	Details
Id	Type Id Properties Aggregatable, Defaulted on create, Filter, Group, idLookup, Sort Description Globally unique string that identifies a record. For information on IDs, see ID Field Type.
IsDeleted	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the record has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
LastActivityDate	Type dateTime Properties Filter, Group, Nillable, Sort Description Value is one of the following, whichever is the most recent: • Due date of the most recent event logged against the object. • Due date of the most recently closed task associated with the object.
LastModifiedDate	Type dateTime Properties Aggregatable, Defaulted on create, Filter, Sort Description Date and time when a user last modified this record.
LastModifiedById	Type reference Properties Aggregatable, Defaulted on create, Filter, Group, Sort Description ID of the User who last updated this object.
LastReferencedDate	Type dateTime

Field	Details
	Properties Aggregatable, Filter, Sort, Nillable Description Date and time when the current user last viewed or modified this record, a record related to this record, or a list view. If this value is <code>null</code>, the current user has never viewed or modified a record related to this object. This field doesn't exist on records for a custom object unless a custom object tab is created for that object. See Use LastReferencedDate and LastViewedDate fields in a SOQL query.
LastViewedDate	Type dateTime Properties Aggregatable, Filter, Sort, Nillable Description Date and time when the current user last viewed or modified this record. If this value is <code>null</code>, the current user has never viewed or modified this record. This field doesn't exist on records for a custom object unless a custom object tab is created for that object. See Use LastReferencedDate and LastViewedDate fields in a SOQL query.
Name	Type string Properties Aggregatable, Create, Defaulted on create, Filter, Group, idLookup, Sort, Update Description Label is Object Name. Name of the object. Maximum size is 80 characters. When the object is created using an API <code>update()</code> call, and the Name field is null, Salesforce sets the value to the record ID. When the object is created using an API <code>create()</code> call, Salesforce sets the initial value to the record ID. You can't set the Name field to null.
OwnerId	Type reference Properties Aggregatable, Create, Defaulted on create, Filter, Group, Namepointing, Sort, Update Description The ID of the user who currently owns this object. Default value is the user logged in to the API to perform the <code>create()</code> call.
RecordTypeId	Type reference Properties Create, Filter, Nillable, Update

Field	Details
	Description ID of the record type assigned to this object. Create at least one record type before this field appears for custom or standard objects.
SystemModStamp	Type dateTime Properties Aggregatable, Defaulted on create, Filter, Sort Description Date and time when a user or automated process such as a trigger last modified this record. In this context, trigger refers to Salesforce code that runs to implement standard functionality, and not an Apex trigger.

SEE ALSO:

[System Fields](#)

[Field Types](#)

[API Field Properties](#)

Custom Object __Feed __Feed

Represents the feed, specifically posts and feed-tracked changes, on a custom object.

A custom object feed shows posts and changes to the object's tracked fields. The object name is variable and uses *Custom Object__Feed* syntax, where *Custom Object* is the name of the custom object. For example, *Textile__Feed* represents a feed on the custom object *Textile__c*.

Supported Calls

`delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

In the internal org, users can delete all feed items they created. This rule varies in Experience Cloud sites where threaded discussions and delete-blocking are enabled. Site members can delete all feed items they created, provided the feed items don't have content nested under them—like a comment, answer, or reply. Where the feed item has nested content, only feed moderators and users with the Modify All Data permission can delete threads.

To delete feed items they didn't create, users must have one of these permissions:

- Modify All Data
- Modify All Records on the parent object, like *Textile__c*.
- Moderate Chatter



Note: Users with the Moderate Chatter permission can delete only the feed items and comments they can see.

Only users with this permission can delete items in unlisted groups.

Fields

Field	Details
BestCommentId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the comment marked as best answer on a question post. This field is available in API version 44.0 and later.
Body	Type textarea Properties Nillable, Sort Description The body of the post. Required when <code>Type</code> is <code>TextPost</code>. Optional when <code>Type</code> is <code>ContentPost</code> or <code>LinkPost</code>.
CommentCount	Type int Properties Filter, Group, Sort Description The number of comments associated with this feed item.  Tip: In a feed that supports pre-moderation, <code>CommentCount</code> isn't updated until a comment is published. For example, say that you comment on a post that already has one published comment and your comment triggers moderation. Now there are two comments on the post, but the count says there's only one. In a moderated feed, comments aren't counted until approved by an admin or someone with <code>Can Approve Feed Post and Comment</code> or <code>Modify All Data</code>. Feed moderation has implications on how you retrieve feed comments. In a moderated feed, rather than retrieving comments by looping through <code>CommentCount</code>, go through pagination until the end of comments is returned.
ConnectionId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description When a PartnerNetworkConnection modifies a record that is tracked, the <code>CreatedBy</code> field contains the ID of the system administrator. The <code>ConnectionId</code> contains the ID of the PartnerNetworkConnection. Available if Salesforce to Salesforce is enabled for your org.
ContentData	Type base64 Properties Nullable Description Available in API version 36.0 and earlier only. Required if <code>Type</code> is <code>ContentPost</code>. Encoded file data in any format, and can't be 0 bytes. Setting this field automatically sets <code>Type</code> to <code>ContentPost</code>.
ContentDescription	Type textarea Properties Nullable, Sort Description Available in API version 36.0 and earlier only. The description of the file specified in <code>ContentData</code>.
ContentFileName	Type string Properties Group, Nullable, Sort Description Available in API version 36.0 and earlier only. This field is required if <code>Type</code> is <code>ContentPost</code>. The name of the file uploaded to the feed. Setting <code>ContentFileName</code> automatically sets <code>Type</code> to <code>ContentPost</code>.
ContentSize	Type int Properties Group, Nullable, Sort Description Available in API version 36.0 and earlier only. The size of the file (in bytes) uploaded to the feed. This field is read-only and is automatically determined during insert.
ContentType	Type string

Field	Details
	Properties Group, Nillable, Sort Description Available in API version 36.0 and earlier only. The MIME type of the file uploaded to the feed. This field is read-only and is automatically determined during insert.
FeedPostId	Type reference Properties Filter, Group, Nillable, Sort Description This field was removed in API version 22.0, and is available in earlier versions for backward compatibility only. ID of the associated FeedPost. A FeedPost represents the following types of changes in a feed item: changes to tracked fields, text posts, link posts, and content posts.
InsertedById	Type reference Properties Group, Nillable, Sort Description ID of the user who added this item to the feed. For example, if an application migrates posts and comments from another application into a feed, the <code>InsertedBy</code> value is set to the ID of the context user.
IsRichText	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the feed item <code>Body</code> contains rich text. If you post a rich text feed comment using SOAP API, set <code>IsRichText</code> to <code>true</code> and escape HTML entities from the body. Otherwise, the post is rendered as plain text. Rich text supports the following HTML tags: • <code><p></code> •  Tip: Though the <code>
</code> tag isn't supported, you can use <code><p>&nbsp; </p></code> to create lines. • <code><a></code> • <code></code> • <code><code></code> • <code><i></code>

Field	Details
	• <u> • <s> • • • • The tag is accessible only through the API and must reference files in Salesforce similar to this example: <code></code>  Note: In API version 35.0 and later, the system replaces special characters in rich text with escaped HTML. In API version 34.0 and prior, all rich text appears as a plain-text representation.
LikeCount	Type int Properties Filter, Group, Sort Description The number of likes associated with this feed item.
LinkUrl	Type url Properties Nillable, Sort Description The URL of a <code>LinkPost</code>.
NetworkScope	Type picklist Properties Group, Nillable, Restricted picklist, Sort Description Specifies whether this feed item is available in the default Experience Cloud site, a specific Experience Cloud site, or all sites. This field is available in API version 26.0 and later, if digital experiences is enabled for your org. <code>NetworkScope</code> can have the following values: • <code>NetworkId</code>—The ID of the Experience Cloud site in which the <code>FeedItem</code> is available. If left empty, the feed item is only available in the default Experience Cloud site. • <code>AllNetworks</code>—The feed item is available in all Experience Cloud sites. Note the following exceptions for <code>NetworkScope</code>:

Field	Details
	- Only feed items with a Group or User parent can set a <code>NetworkId</code> or a null value for <code>NetworkScope</code>. - For feed items with a record parent, users can set <code>NetworkScope</code> only to <code>AllNetworks</code>. - You can't filter a feed item on the <code>NetworkScope</code> field.
ParentId	Type reference Properties Filter, Group, Sort Description ID of the custom object record that is tracked in the feed. The feed is displayed on the detail page for this record.
RelatedRecordId	Type reference Properties Group, Nillable, Sort Description ID of the <code>ContentVersion</code> object associated with a <code>ContentPost</code>. This field is null for all posts except <code>ContentPost</code>.
Title	Type string Properties Group, Nillable, Sort Description The title of the feed item. When the <code>Type</code> is <code>LinkPost</code>, the <code>LinkUrl</code> is the URL and this field is the link name.
Type	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of feed item: <code>ActivityEvent</code>—indirectly generated event when a user or the API adds a Task associated with a feed-enabled parent record (excluding email tasks on cases). Also occurs when a user or the API adds or updates a <code>Task</code> or Event associated with a case record (excluding email and call logging).

Field	Details
	For a recurring Task with CaseFeed disabled, one event is generated for the series only. For a recurring Task with CaseFeed enabled, events are generated for the series and each occurrence. • AdvancedTextPost—created when a user posts a group announcement and, in Lightning Experience as of API version 39.0 and later, when a user shares a post. • AnnouncementPost—Not used. • ApprovalPost—generated when a user submits an approval. • BasicTemplateFeedItem—Not used. • CanvasPost—a post made by a canvas app posted on a feed. • CollaborationGroupCreated—generated when a user creates a public group. • CollaborationGroupUnarchived—Not used. • ContentPost—a post with an attached file. • CreatedRecordEvent—generated when a user creates a record from the publisher. • DashboardComponentAlert—generated when a dashboard metric or gauge exceeds a user-defined threshold. • DashboardComponentSnapshot—created when a user posts a dashboard snapshot on a feed. • LinkPost—a post with an attached URL. • PollPost—a poll posted on a feed. • ProfileSkillPost—generated when a skill is added to a user's Chatter profile. • QuestionPost—generated when a user posts a question. • ReplyPost—generated when Chatter Answers posts a reply. • RypplePost—generated when a user creates a Thanks badge in WDC. • TextPost—a direct text entry on a feed. • TrackedChange—a change or group of changes to a tracked field. • UserStatus—automatically generated when a user adds a post. Deprecated. The following values appear in the Type picklist for all feed objects but apply only to CaseFeed: • CaseCommentPost—generated event when a user adds a case comment for a case object • EmailMessageEvent—generated event when an email related to a case object is sent or received • CallLogPost—generated event when a user logs a call for a case through the user interface. CTI calls also generate this event. • ChangeStatusPost—generated event when a user changes the status of a case • AttachArticleEvent—generated event when a user attaches an article to a case  Note: If you set Type to ContentPost, also specify ContentData and ContentFileName.

Field	Details
Visibility	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Specifies whether this feed item is available to all users or internal users only. This field is available in API version 26.0 and later, if digital experiences is enabled for your org. Visibility can have the following values: • AllUsers—The feed item is available to all users who have permission to see the feed item. • InternalUsers—The feed item is available to internal users only. Note the following exceptions for Visibility: • For record posts, Visibility is set to InternalUsers for all internal users by default. • External users can set Visibility only to AllUsers. • On user and group posts, only internal users can set Visibility to InternalUsers.

Usage

A feed for a custom object is automatically created when a user enables feed tracking for the custom object. Use feeds to track changes to the custom objects they serve. For example, `Textile__Feed` tracks changes to a `Textile__c` object. Use feed objects to retrieve the content of feed fields, such as type of feed or feed ID.

Note the following SOQL restrictions. No SOQL limit if logged-in user has View All Data permission. If not, specify a `LIMIT` clause of 1,000 records or fewer. SOQL `ORDER BY` on fields using relationships is not available. Use `ORDER BY` on fields on the root object in the SOQL query.

What About *StandardObjectName*Feed Objects?

Similar to custom objects, standard objects can have associated feed objects. For a list of *StandardObjectName*Feed objects, see [StandardObjectName Feed Feed](#).

CHAPTER 5 Object Interfaces

In this chapter ...

- [PriceAdjustmentGroup](#)
- [PriceAdjustmentItem](#)
- [SalesTransaction](#)
- [SalesTransactionItem](#)

This section provides a list of standard object interfaces and their standard fields.

Some fields may not be listed for some object interfaces. To see the system fields for each object interface, see [System Fields](#).

To verify the complete list of fields for an object interface, you can use a describe call from the API.

PriceAdjustmentGroup

Defines the business logic for a top-level price adjustment, for example, a discount applied to an entire order. This object interface is available in API version 55.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

This object interface is available with Subscription Management or B2B Commerce.

Fields

Field	Details
AdjustmentSource	Type picklist Properties Filter, Restricted picklist, Sort Description Indicates the source of the adjustment. This field is available with B2B Commerce. Possible values are: • Discretionary—The adjustment is entered manually, for example, by a sales rep. • Promotion—The adjustment is part of a promotion. • Rule—Reserved for future use. • System—The adjustment is configured by the system data, for example, as part of a pricing rule or discount schedule.
AdjustmentType	Type picklist Properties Filter, Restricted picklist, Sort Description Indicates whether the adjustment is a percentage, an amount, or an override. Possible values are: • AdjustmentAmount—Reserved for future use. • AdjustmentPercentage • OverrideAmount

Field	Details
AdjustmentValue	Type double Properties Filter, Sort Description The value of the adjustment. To indicate a discount, use a negative number.
Description	Type textarea Properties Nillable Description User-entered description of the price adjustment group. Available in API versions 55.0 to 57.0.
ImplementorType	Type string Properties Filter, Group, Nillable, Sort Description The object that is implementing this entity interface, for example, a WebCartAdjustmentGroup object.
PriceAdjustmentCauseId	Type reference Properties Filter, Nillable, Sort Description The ID of the record that is the source of the adjustment. For example, if the price adjustment is due to a promotion, this field contains the ID of the promotion record. If the price adjustment is due to a price adjustment tier, this field contains the ID of the price adjustment tier record. This field is a relationship field. Relationship Name PriceAdjustmentCause Relationship Type Lookup Refers To PriceAdjCauseInterface
Priority	Type int

Field	Details
	Properties Filter, Nillable, Sort Description A positive integer indicating the order in which this price adjustment group is applied, relative to other price adjustment groups. A <code>Priority</code> of 1 indicates this price adjustment group is applied first. Price adjustments with a null priority are applied after price adjustments with a specified priority. If two or more price adjustments have a null priority, percentage adjustments are applied before amount adjustments. Applying a percentage adjustment before an amount adjustment results in a larger total adjustment.  Note: The value of <code>Priority</code> must be unique among price adjustment groups in the same sales transaction.
<code>SalesTransactionId</code>	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the sales transaction that the price adjustment group belongs to. This field is a relationship field. Relationship Name SalesTransaction Relationship Type Lookup Refers To SalesTransaction
<code>TotalAmount</code>	Type currency Properties Filter, Sort Description The total amount of adjustments of all related price adjustment items, inclusive of quantity, prorated for the duration of the subscription. This field is a calculated field equal to the sum of the <code>TotalAmount</code> fields in the related price adjustment items.

PriceAdjustmentItem

Defines the business logic for an item-level price adjustment, for example, a discount on an order item. This object interface is available in API version 55.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

This object interface is available with Subscription Management or B2B Commerce.

Fields

Field	Details
AdjustmentAmountScope	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Used with <code>AdjustmentValue</code> to determine the amount of the adjustment. Possible values are: • Total—The adjustment applies to the line item's total and isn't multiplied by the quantity, prorated for the duration of the subscription. For example, let's say a sales transaction item quantity is 10 and the <code>TotalLineAmount</code> is 1000. If the price adjustment item has an <code>AdjustmentValue</code> of -10, an <code>AdjustmentType</code> of <code>AdjustmentAmount</code>, and an <code>AdjustmentAmountScope</code> of <code>Total</code>, the \$10 discount is applied to the total line amount. The <code>TotalAmount</code> of the price adjustment item is $\\$1000 + (-\\$10) = \\$990$. • Unit—The adjustment is multiplied by the line item's quantity. For example, let's say a sales transaction item quantity is 5 and the <code>TotalLineAmount</code> is 1000. If the price adjustment item has an <code>AdjustmentValue</code> of -10, an <code>AdjustmentType</code> of <code>AdjustmentAmount</code>, and an <code>AdjustmentAmountScope</code> of <code>Unit</code>, the \$10 discount is applied to each line amount. The <code>TotalAmount</code> of the price adjustment item is $\\$1000 + (-\\$10 \times 5) = \\$950$.
AdjustmentSource	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Indicates the source of the adjustment. Possible values are: • Discretionary—The adjustment is entered manually; for example, by a sales rep.

Field	Details
	• Promotion—The adjustment is a promotion. • Rule—Reserved for future use. • System—The adjustment is determined by the pricing configuration for the product; for example, as part of a discount schedule.
AdjustmentType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Indicates whether the adjustment is a percentage, an amount, or an override. Possible values are: • AdjustmentAmount • AdjustmentPercentage • OverrideAmount
AdjustmentValue	Type double Properties Filter, Sort Description The value of the adjustment. Used together with AdjustmentAmountScope to determine the amount of the adjustment.
Description	Type textarea Properties Nillable Description The user-entered description of the price adjustment item. Available in API version 55.0 to 57.0.
ImplementorType	Type string Properties Filter, Group, Nillable, Sort Description The object that is implementing this object interface, for example, a CartItemPriceAdjustment object.

Field	Details
PriceAdjustmentCauseId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the record that caused the adjustment. For example, if the price adjustment is due to a promotion, this field contains the ID of the Promotion record. If the price adjustment is due to a price adjustment tier, this field contains the ID of the PriceAdjustmentTier record. This field is a relationship field. Relationship Name PriceAdjustmentCause Relationship Type Lookup Refers To PriceAdjCauseInterface
PriceAdjustmentGroupId	Type reference Properties Filter, Group, Nillable, Sort Description A reference to the object interface or object that summarizes the values from multiple price adjustment items. If the related entity is an object, the object must implement the PriceAdjustmentGroup object interface. Relationship Name PriceAdjustmentGroup Relationship Type Lookup Refers To PriceAdjustmentGroup
Priority	Type int Properties Filter, Group, Nillable, Sort Description A positive integer indicating the order in which this price adjustment item is applied, relative to other price adjustment items. A <code>Priority</code> of 1 indicates this price adjustment item is applied first. Price adjustments with a null priority are applied after price adjustments with a specified priority. If two or more price adjustments have a null priority, percentage adjustments are

Field	Details
	applied before amount adjustments. Applying a percentage adjustment before an amount adjustment results in a larger total adjustment.  Note: The value of <code>Priority</code> must be unique among price adjustment items related to the same price adjustment group. For example, you can't have two price adjustment items with a priority of 1. For example, let's say that two price adjustment items apply to the same item to be priced. The first price adjustment, <code>Spring_Promotion</code>, defines a 10% discount and has <code>Priority</code> of 1. The second price adjustment, <code>Early_Renewal_Discount</code>, defines a \$2,000 discount and has a <code>Priority</code> of 2. In this case, the <code>Spring_Promotion</code> price adjustment is applied before the <code>Early_Renewal_Discount</code> price adjustment.
<code>SalesTransactionItemId</code>	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the sales transaction item that the price adjustment item applies to. This field is a relationship field. Relationship Name <code>SalesTransactionItem</code> Relationship Type Lookup Refers To <code>SalesTransactionItem</code>
<code>TotalAmount</code>	Type currency Properties Filter, Sort Description The total amount of the adjustment that applies to the item to be priced, inclusive of quantity, prorated for the duration of the subscription. For example, let's say the price adjustment item has an <code>AdjustmentAmountScope</code> of <code>Unit</code>, an <code>AdjustmentType</code> of <code>AdjustmentAmount</code>, and an <code>AdjustmentValue</code> of <code>-10</code>. This configuration indicates a \$10 per-unit discount. If the subscription is priced for 12 months and the pricing term is 1, the <code>PricingTermCount</code> on the sales transaction item is 12. If the quantity is 5, the value of <code>TotalAmount</code> is $5 \times 12 \times -10 = -600$.

SalesTransaction

Defines the business logic for a sales transaction, for example, an order or a cart. This object interface is available in API version 55.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

This object interface is available with Subscription Management and B2B Commerce.

Fields

Field	Details
ImplementorType	Type string Properties Default on create, Filter, Group, Restricted picklist, Sort Description The object that is implementing this object interface, for example, an Order object.
TotalAdjustmentAmount	Type currency Properties Filter, Nillable, Sort Description The sum of all adjustments applied to the sales transaction, inclusive of quantity, prorated for the duration of the subscription. Includes distributed price adjustment items and price adjustment items applied directly. This is a calculated field equal to the sum of <code>TotalAdjustmentAmount</code> on the related sales transaction items.
TotalAdjustmentDistAmount	Type currency Properties Filter, Nillable, Sort Description The sum of the distributed price adjustment items applied to the related sales transaction items, inclusive of quantity, prorated for the duration of the subscription. Does not include price adjustment items that are applied directly. This is a calculated field equal to the sum of <code>TotalAdjustmentDistAmount</code> on the related sales transaction items.

Field	Details
TotalAmount	Type currency Properties Filter, Nillable, Sort Description The final price of the sales transaction, after all adjustments, inclusive of quantity, prorated for the duration of the subscription. This is a calculated field equal to the sum of <code>TotalPrice</code> on the related sales transaction items.
TotalListAmount	Type currency Properties Filter, Nillable, Sort Description The sum of the list price of the related sales transaction items, inclusive of quantity, prorated for the duration of the subscription. This is a calculated field equal to the sum of <code>ListPriceTotal</code> on the related sales transaction items.
TotalProductAmount	Type currency Properties Filter, Nillable, Sort Description The total price of all related sales transaction items of type <code>Product</code>, before price adjustments, inclusive of quantity, prorated for the duration of the subscription. This is a calculated field equal to the sum of <code>TotalLineAmount</code> on the related sales transaction items of type <code>Product</code>.

SalesTransactionItem

Defines the business logic for a sales transaction item, for example, an item in an order. This object interface is available in API version 55.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

This object interface is available with Subscription Management or B2B Commerce.

Fields

Field	Details
BasisTransactionItemId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the transaction item to use as a reference when pricing this transaction. For example, let's say an order item is renewed. In this case, a renewal order item is created from the new sale order item, and the <code>BasisTransactionItemId</code> on the new sale order item is updated to contain the ID of the renewal order item. This field is a polymorphic relationship field. Relationship Name BasisTransactionItem Relationship Type Lookup Refers To SalesTransactionItem
BillingFrequency	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The time period that indicates how often the sales transaction item is billed. Possible values are: • Annual • Monthly
EndDate	Type date Properties Filter, Group, Nillable, Sort Description The last day the sales transaction item is available. For example, the last day that the service purchased in the order item is available.
ImplementorType	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The object that is implementing this entity interface, for example, an OrderProduct object.
ListPrice	Type currency Properties Filter, Nillable, Sort Description The list price for the sales transaction item. This value is inherited from the related price book entry.
ListPriceTotal	Type currency Properties Filter, Nillable, Sort Description The list price, inclusive of quantity, prorated for the duration of the subscription. This calculated field is equal to ListPrice times Quantity times PricingTermCount.
NetUnitPrice	Type currency Properties Filter, Nillable, Sort Description The unit price after all adjustments are applied.
ObligatedAmount	Type currency Properties Filter, Nillable, Sort Description In a subscription, the amount a subscriber is billed for products used during the subscription period that the subscriber returns before the subscription end date. This field's value is the price for use of the product. This field is available in version 57.0 and later. This field is available when Subscription Management is enabled.  Note: - A subscriber must submit a quantity amendment in order to change the subscription's product quantity. A quantity amendment request is only valid until the subscription end date. - A subscriber is eligible for a refund only for the periods when the products weren't used.

Field	Details
	The subscription's proration policy indicates whether the obligated amount and the refund are prorated for partial periods.
ParentSalesTransactionItem	Type reference Properties Filter, Group, Nillable, Sort Description The parent transaction of <code>BasisTransactionItemId</code>. This field is available in API version 58.0 and later. This field is a polymorphic relationship field. Relationship Name ParentSalesTransactionItem Relationship Type Lookup Refers To SalesTransactionItem
PeriodBoundary	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The period boundary helps determine the start and end date of the billing periods. Possible values are: <code>AlignToCalendar</code>—The period starts on the first day of the term unit, for example, the first day of the month. <code>Anniversary</code>—The start date determines the boundary. For example, if a monthly subscription starts on September 13, the subscription starts on the 13th day of each month. <code>DayOfPeriod</code>—The period starts on the day indicated by <code>PeriodBoundaryDay</code>. <code>LastDayOfPeriod</code>—The period starts on the last day of the pricing term unit; for example, the last day of the month.
PeriodBoundaryDay	Type int Properties Filter, Group, Nillable, Sort Description Required when <code>PeriodBoundary</code> is <code>DayOfPeriod</code>. Indicates day of the week or month that marks the period boundary. Must be an integer from 1 through 31.

Field	Details
PeriodBoundaryStartMonth	Type picklist Properties Create, Filter, Group, Restricted picklist, Nillable, Sort, Update Description Field is populated based on input in the StartDate, PeriodBoundary, and PeriodBoundaryDay when BillingFrequency is Annual or by manual user entry. Possible values are: • 1-January • 2-February • 3-March • 4-April • 5-May • 6-June • 7-July • 8-August • 9-September • 10-October • 11-November • 12-December
PricebookEntryId	Type reference Properties Filter, Group, Nillable, Sort Description The unique identifier of the related price book entry. This field is a relationship field. Relationship Name PricebookEntry Relationship Type Lookup Refers To PricebookEntryInterface
PricingTermCount	Type double Properties Filter, Nillable, Sort Description A calculated field indicating the number of pricing terms in the subscription.

Field	Details
PricingTransactionType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the type of pricing transaction, for example, a new sale, a cancellation, an amendment, or a renewal. Possible values are: • AmendmentAtLastNegotiatedPrice—calculate the price of the amended sales transaction item using the same price book and price adjustments as the new sale item. For example, an order item that is amended using a pricing transaction type of AmendmentAtLastNegotiatedPrice is priced using the same price book information and price adjustments as the new sale item. The amended order item has the same price as the new sale order item. This value is available in version 57.0 and later. • AmendmentStartingFromListPrice—calculate the price of the amended sales transaction item using current price book information, disregarding any pricing information or adjustments that were applied to the new sale item. Typically, an amended transaction item has a different price than the new sale transaction item. This value is available in version 57.0 and later. • Cancellation—calculate the price of the canceled transaction. For example, let's say that a 1-year subscription was purchased on January 1, then canceled on July 31. The price of the canceled products and services from August 1 through Dec 31 is calculated. • NewSale—the price of a new transaction is calculated. • RenewalAtLastNegotiatedPrice—calculate the price of the renewal transaction item using the same price book and price adjustments as the new sale item. For example, an order item that is renewed using a pricing transaction type of RenewalAtLastNegotiatedPrice is priced using the same price book information and price adjustments as the new sale item. The renewal order item has the same price as the new sale order item. • RenewalAtListPrice—calculate the price of the renewal transaction item using current price book information, disregarding any pricing information or adjustments that were applied to the new sale item. Typically, a renewal transaction item has a different price than the new sale transaction item.
ProductId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the related product. This field is a relationship field.

Field	Details
	Relationship Name Product Relationship Type Lookup Refers To ProductInterface
ProductSellingModelId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the related product selling model. The product selling model defines one method by which a product can be sold, for example, as a one-time sale, an evergreen subscription, or a termed subscription. This field is a relationship field. Relationship Name ProductSellingModel Relationship Type Lookup Refers To ProductSellingModel
ProrationPolicyId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the related proration policy. The proration policy defines how the price is calculated for each subscription period, for example, whether partial periods are allowed, and how remainder amounts are handled. This field is a relationship field. Relationship Name ProrationPolicy Relationship Type Lookup Refers To ProrationPolicy
Quantity	Type double

Field	Details
	Properties Filter, Sort Description Required. Number of units in the sales transaction item.
SalesItemType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Required. The type of sale. Possible values are: • Charge • Product
SalesTransactionId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the related sales transaction. This field is a polymorphic relationship field. Relationship Name SalesTransaction Relationship Type Lookup Refers To SalesTransaction
StartDate	Type date Properties Filter, Group, Nillable, Sort Description The start date of the service or charge.
StartingPriceTotal	Type currency Properties Filter, Nillable, Sort

Field	Details
	Description The starting unit price, inclusive of quantity, prorated for the duration of the subscription. This calculated field is equal to <code>StartingUnitPrice</code> times <code>Quantity</code> times <code>PricingTermCount</code> .
<code>StartingUnitPrice</code>	Type currency Properties Filter, Nillable, Sort Description The unit price before any adjustments.
<code>StartingUnitPriceSource</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Required. Indicates whether the starting unit price was inherited, entered manually, or calculated. Possible values are: • <code>Inherited</code>—The starting unit price is copied from a previous transaction, for example, from the order item being renewed. • <code>Manual</code>—The starting unit price is entered manually, for example, by a sales rep. • <code>System</code>—The starting unit price is calculated using pricing information that was configured by an administrator, for example, a pricing tier.
<code>StockKeepingUnit</code>	Type string Properties Filter, Group, Nillable, Sort Description The SKU assigned to the related product.
<code>SubscriptionTerm</code>	Type int Properties Filter, Group, Nillable, Sort Description The number of terms in the subscription. You can indicate a subscription's length using either the start and end dates, or by using the start date and the subscription term.

Field	Details
TotalAdjustmentAmount	Type currency Properties Filter, Nillable, Sort Description The sum of the adjustments applied to the sales transaction item, inclusive of quantity, prorated for the duration of the subscription. Includes distributed price adjustment items and price adjustment items applied directly.
TotalAdjustmentDistAmount	Type currency Properties Filter, Nillable, Sort Description The sum of the distributed price adjustment items applied to the sales transaction item, prorated for the duration of the subscription. Doesn't include price adjustment items that are applied directly. A distributed price adjustment is automatically created to apply a transaction-level adjustment to the transaction items. For example, let's say that you have an order with two order items: one for a file storage service and another for a video streaming service. A 10% volume discount and a 15% manual discount are applied to the entire order. An additional 20% discount is applied to the file storage service. To distribute the order-level discounts, the system creates a 10% price adjustment item and a 15% price adjustment item for each order item. In this example, the file storage service's sales transaction item has the following field values: • TotalAdjustmentAmount the sum of all item-level adjustments, including the 10% price adjustment item, the 15% price adjustment item, and the 20% price adjustment item. • TotalAdjustmentDistAmount the sum of the distributed item-level adjustments, including the 10% price adjustment item and the 15% price adjustment item.
TotalLineAmount	Type currency Properties Filter, Nillable, Sort Description The total price of the sales transaction item, before price adjustments, inclusive of quantity, prorated for the duration of the subscription. This calculated field is equal to <code>TotalPrice</code> times <code>Quantity</code> times <code>PricingTermCount</code>.
TotalPrice	Type currency

Field	Details
	Properties Filter, Nillable, Sort
	Description The price after all adjustments, inclusive of quantity, prorated for the duration of the subscription. This calculated field is equal to <code>TotalAdjustmentAmount</code> plus <code>TotalLineAmount</code> .

CHAPTER 6 Standard Objects

This section provides a list of standard objects and their standard fields. Only a subset of standard objects appear in Object Manager.

Some fields may not be listed for some objects. To see the system fields for each object, see [System Fields](#).

To verify the complete list of fields for an object, use a describe call from the API, or inspect with an appropriate tool. For example, inspecting the WSDL or using a schema viewer.

[AbnExperiment](#)

Represents an A/B/n experiment that's used with Marketing Cloud Next content, Experience Cloud websites, and platform automations. This object is available in API version 63.0 and later.

[AbnExperimentCohort](#)

Represents the specified audience that's participating in an A/B/n experiment. This object is available in API version 63.0 and later.

[AcceptedEventRelation](#)

Represents event participants (invitees or attendees) with the status `Accepted` for a given event.

[Account](#)

Represents an individual account, which is an organization or person involved with your business (such as customers, competitors, and partners).

[AccountBrand](#)

Represents the brand details of a Partner Account. This object is available in API version 43.0 and later.

[AccountContactRelation](#)

Represents a relationship between a contact and one or more accounts.

[AccountCleanInfo](#)

Stores the metadata Data.com Clean uses to determine an account record's clean status. AccountCleanInfo helps you automate the cleaning or related processing of account records.

[AccountContactRole](#)

Represents the role that a Contact plays on an Account.

[AccountInsight](#)

Represents an individual insight (a key business development) related to an account record.

[AccountOwnerSharingRule](#)

Represents the rules for sharing an account with a User other than the owner.

[AccountPartner](#)

This object represents a partner relationship between two Account records. An AccountPartner record is created automatically when a Partner record is created for a partner relationship between two accounts. An AccountPartner record is also created automatically between an account and an opportunity's account when a Partner record is created between an account and an opportunity.

Standard Objects

[AccountPlan](#)

Represents customer information with measurable objectives and executable steps to proactively manage and grow customer relationships. This object is available in API version 62.0 and later.

[AccountPlanObjective](#)

Represents strategic objectives or initiatives pursued by a relationship team with a customer to enhance customer engagement and satisfaction. This object is available in API version 62.0 and later.

[AccountPlanObjectiveMeasure](#)

Represents the performance of target metrics for an objective associated with the account plan. This object is available in API version 62.0 and later.

[AccountPlanObjMeasCalcCond](#)

Represents a field and value combination for filtering records to include in the calculation of a sales account plan objective measure's current value. This object is available in API version 63.0 and later.

[AccountPlanObjMeasCalcDef](#)

Represents the definition of a target object, rollup field, and logic for calculating the current value of a sales account plan objective measure. This object is available in API version 63.0 and later.

[AccountPlanObjMeasCalcDefLocalization](#)

Represents the translated value of the definition of a target object, rollup field, and logic for calculating the current value of a sales account plan objective measure. This object is available in API version 63.0 and later when the Translation Workbench is enabled.

[AccountPlanObjMeasRela](#)

Represents a junction between an account plan objective measure and the related objects. This object is available in API version 62.0 and later.

[AccountRelationship](#)

Represents a relationship of a given type between two accounts. This object is available in API version 45.0 and later.

[AccountRelationshipShareRule](#)

Represents the rule that determines which object records are shared, how they are shared, the account relationship type that shares the records, and the level of access granted to the records. This object is available in API version 45.0 and later.

[AccountShare](#)

Represents a sharing entry on an account.

[AccountTag](#)

Associates a word or short phrase with an Account.

[AccountTeamMember](#)

Represents a User who is a member of an Account team.

[AccountTerritoryAssignmentRule](#)

An account assignment rule that assigns accounts to territories based on account fields. Available if Sales Territories has been enabled.

[AccountTerritoryAssignmentRuleItem](#)

A row of selection criteria for an AccountTerritoryAssignmentRule object. Available if Sales Territories has been enabled.

[AccountTerritorySharingRule](#)

Represents the rules for sharing an Account within a territory.

[AccountUserTerritory2View](#)

Represents the view of the Users in Assigned Territories related list in Lightning Experience for Sales Territories. Available in API version 42.0 and later.

Standard Objects

[ActionCadence](#)

Represents the definition of a cadence. This object is available in API version 45.0 and later.

[ActionCadenceRule](#)

Represents the logic that a branch step uses to determine which branch an action cadence tracker follows in an action cadence. Use ActionCadenceRule to learn about a branch step, including its logic and what the next step is. This object is available in API version 48.0 and later.

[ActionCadenceRuleCondition](#)

Represents the logic for a branch step. This object is available in API version 48.0 and later.

[ActionCadenceStep](#)

Represents a step in a cadence. Use ActionCadenceStep to learn which steps belong to a cadence, and how the steps are connected to each other. This object is available in API version 48.0 and later.

[ActionCadenceStepTracker](#)

Represents a step in an active cadence for a specific cadence target. This object is available in API version 48.0 and later.

[ActionCadenceStepVariant](#)

Represents an email template or call script variant associated with an action cadence step. Email and call steps can have up to 3 variants associated so sales teams can compare the engagement results. This object is available in API version 53.0 and later.

[ActionCadenceTracker](#)

Represents an active cadence target. This object is available in API version 45.0 and later.

[ActionCdncStpMonthlyMetric](#)

Represents the monthly engagement metrics for an action cadence step. This object is available in API version 49.0 and later.

[ActionLinkGroupTemplate](#)

Action link templates let you reuse action link definitions and package and distribute action links. An action link is a button on a feed element. Clicking on an action link can take a user to another Web page, initiate a file download, or invoke an API call to an external server or Salesforce. Use action links to integrate Salesforce and third-party services into the feed. Every action link belongs to an action link group and action links within the group are mutually exclusive. This object is available in API version 33.0 and later.

[ActionLinkTemplate](#)

Action link templates let you reuse action link definitions and package and distribute action links. An action link is a button on a feed element. Clicking an action link can take a user to another Web page, initiate a file download, or invoke an API call to an external server or Salesforce. Use action links to integrate Salesforce and third-party services into the feed. This object is available in API version 33.0 and later.

[ActionPlan](#)

Represents the instance of an action plan, a set of tasks created from an action plan template. This object is available in API version 44.0 and later.

[ActionPlanItem](#)

Represents the instance of an action plan item. This object is available in API version 44.0 and later.

[ActionPlanTemplate](#)

Represents the instance of an action plan template. This object is available in API version 44.0 and later.

[ActionPlanTemplateItem](#)

Represents the instance of an item on an action plan template version. This object is available in API version 44.0 and later.

[ActionPlanTemplateItemValue](#)

Represents the value associated with an action plan template item. This object is available in API version 44.0 and later.

Standard Objects

[ActionPlanTemplateVersion](#)

Represents the version of an action plan template. This object is available in API version 44.0 and later.

[ActiveFeatureLicenseMetric](#)

Represents the number of active, assigned, and purchased feature licenses in the org. This object is available in API version 52.0 and later.

[ActivePermSetLicenseMetric](#)

Represents the number of active, assigned, and purchased permission set licenses in the org. This object is available in API version 52.0 and later.

[ActiveProfileMetric](#)

Represents the profile associated with the active, assigned, and purchased user licenses. This object is available in API version 52.0 and later.

[ActiveScratchOrg](#)

Represents an active scratch org. This object is available in API version 41.0 and later.

[ActivityFieldHistory](#)

Represents a change in a field value for a tracked object or field. This object is a big object. This object is available in API version 55.0 and later.

[ActivityHistory](#)

This read-only object is displayed in a related list of closed activities—past events and closed tasks—related to an object. It includes activities for all contacts related to the object. ActivityHistory fields for phone calls are only available if your organization uses Salesforce CRM Call Center.

[ActivityMetric](#)

Represents activities that were added to Salesforce automatically by Einstein Activity Capture and manually by users.

[ActivityUsrConnectionStatus](#)

Represents the status of the email connections for Einstein Activity Capture users. You can also see whether users accepted the required terms of service to capture emails. This object is available in API version 54.0 and later.

[AdditionalNumber](#)

Represents an optional additional number for a call center. This additional number is visible in the call center's phone directory.

[Address](#)

Represents a mailing, billing, or home address.

[AgentWork](#)

Represents a work assignment that's been routed to an agent. If the work is transferred to another agent, a new AgentWork record is created. This object is available in API version 32.0 and later.

[AgentWorkConversationalData](#)

Stores conversation data for agent work sessions, such as agent interactions, transfer information, and operational metrics. This object is available in API version 66.0 and later.

[AgentWorkSkill](#)

Represents a skill used to route a work assignment to an agent. AgentWorkSkill is used for reporting and represents the result of a routing decision. This object is available in API version 42.0 and later.

[AIApplication](#)

Represents an AI application such as Einstein Prediction Builder. This object is available in API version 50.0 and later.

[AIApplicationConfig](#)

Additional prediction information related to an AI application. This object is available in API version 50.0 and later.

Standard Objects

[AiGenActionItem](#)

Represents business actions suggested by generative AI. AI-generated action items are sent to either agents for automatic execution or human users for review, depending on org preference and if there are any errors in the process. This object is available in API version 64.0 and later.

[AllInsightAction](#)

Represents an Einstein prediction insight action. This object is available in API version 47.0 and later.

[AllInsightFeedback](#)

Represents an Einstein prediction insight feedback. This object is available in API version 47.0 and later.

[AllInsightReason](#)

Represents an Einstein prediction insight reason. This object is available in API version 47.0 and later.

[AllInsightValue](#)

Represents an Einstein prediction insight value. This object is available in API version 47.0 and later.

[AiJobRun](#)

Represents an execution instance of an AI job. This object tracks the overall status and manages the lifecycle of the job from initiation to completion. This object is available in API version 63.0 and later.

[AiJobRunItem](#)

Stores an individual item associated with a parent AiJobRun, including the inputs and resulting response. This object is available in API version 63.0 and later.

[AiModelLanguage](#)

An object that stores language related information that is generated for each AI model. This object is available in API version 55.0 and later.

[AIRecordInsight](#)

Represents an Einstein prediction insight. This object is available in API version 47.0 and later.

[AIResearchPromptResult](#)

Represents the research result generated by Agentforce or by Einstein from a standard or custom prompt template. This object is available in API version 64.0 and later.

[AllowedEmailDomain](#)

Represents an allowed email domain for users in your organization. You can define an allowlist to restrict the email domains allowed in a user's `Email` field. This object is available in API version 29.0 and later.

[AlternativePaymentMethod](#)

Represents a payment method that isn't cash, a debit card, or a credit card. This object defines methods that aren't defined by the [CardPaymentMethod](#) or [DigitalWallet](#) objects. Examples of alternative payment methods include CashOnDeliver, Klarna, and Direct Debit. `AlternativePaymentMethod` functions the same as any other type of payment method for processing transactions through a payment gateway. This object is available in API version 51.0 and later.

[AnalyticsChangeEventLog](#)

Analytics Change Event Logs represent route or page changes made in the CRM Analytics. This object is available in API version 61.0 and later.

[AnalyticsDashboard](#)

Represents a Tableau Next dashboard. This object is available in API version 64.0 and later.

[AnalyticsDownloadEventLog](#)

`AnalyticsDownloadEventLog` represent downloads made from lens and dashboard in the CRM Analytics. This object is available in API version 61.0 and later.

Standard Objects

[AnalyticsInteractEventLog](#)

Analytics Interact Event Log represents route or page changes made in the CRM Analytic UI. This object is available in API version 61.0 and later.

[AnalyticsLicensedAsset](#)

Represents a licensed Analytics asset. In this context, Analytics is CRM Analytics, Sonic, or Mulesoft Data Path. Available in API version 52.0 and later.

[AnalyticsPerfEventLog](#)

Analytics Perf Event Log helps track trends in your Analytics performance. This object is available in API version 61.0 and later.

[AnalyticsVisualization](#)

Represents a Tableau Next viusalization. This object is available in API version 64.0 and later.

[AnalyticsVizField](#)

Represents a Tableau Next viusalization field. This object is available in API version 65.0 and later.

[AnalyticsVizViewDef](#)

Represents a Tableau Next viusalization view definition. This object is available in API version 64.0 and later.

[AnalyticsWorkspace](#)

Represents a Tableau Next workspace. This object is available in API version 54.0 and later.

[AnalyticsWorkspaceAsset](#)

Represents a Tableau Next asset in a workspace. This object is available in API version 54.0 and later.

[Announcement](#)

Represents a Chatter group announcement. This object is available in API version 30.0 and later.

[ApexCalloutEventLog](#)

Apex Callout event logs contain details about callouts (external requests) during Apex code execution. This object is available in API version 55.0 and later.

[ApexClass](#)

Represents an Apex class.

[ApexComponent](#)

Represents a definition for a custom component that can be used in a Visualforce page alongside standard components such as `<apex:relatedList>` and `<apex:dataTable>`.

[ApexEmailNotification](#)

Stores a Salesforce user ID or external email address to be notified when unhandled Apex exceptions occur. This object is available in API version 35.0 and later.

[ApexExecutionEventLog](#)

Apex Execution event logs contain details about Apex classes that are used. This object is available in API version 55.0 and later.

[ApexExtlCalloutEventLog](#)

Apex Extl Callout EventLog represent external data callouts via custom adapters for Salesforce Connect. This object is available in API version 61.0 and later.

[ApexInlineEventLog](#)

This object is reserved for future use. This object is available in API version 66.0 and later.

[ApexLog](#)

Represents a debug log containing information about a transaction, including information about Apex, Visualforce, and workflow and validation rules. This object is available in API version 19.0 and later.

Standard Objects

[ApexPage](#)

Represents a single Visualforce page.

[ApexPageInfo](#)

Represents metadata about a single Visualforce page. This object is available in API version 48.0 and later.

[ApexRestApiEventLog](#)

Apex REST API event logs capture information about every Apex REST API request. This object is available in API version 55.0 and later.

[ApexSoapApiEventLog](#)

Apex SOAP event logs contain details about custom SOAP web service calls. This object is available in API version 55.0 and later.

[ApexTestQueueItem](#)

Represents a single Apex class in the Apex job queue. This object is available in API version 23.0 and later.

[ApexTestResult](#)

Represents the result of an Apex test method execution. This object is available in API version 23.0 and later.

[ApexTestResultLimits](#)

Captures the Apex test limits used for a particular test method execution. An instance of this object is associated with each ApexTestResult record. This object is available in API version 37.0 and later.

[ApexTestRunResult](#)

Contains summary information about all the test methods that were run in a particular Apex job. This object is available in API version 37.0 and later.

[ApexTestSuite](#)

Represents a suite of Apex classes to include in a test run. A TestSuiteMembership object associates each class with the suite. This object is available in API version 36.0 and later.

[ApexTrigger](#)

Represents an Apex trigger.

[ApexTriggerEventLog](#)

Apex Trigger event logs contain details about triggers that fire in an organization. This object is available in API version 55.0 and later.

[ApexTypeImplementor](#)

Represents Apex classes that directly or indirectly implement an interface. Using a SOQL query, this object gets information about public or global classes and only global classes for installed managed packages. This object is available in API version 54.0 and later.

[ApexUnexpectedExcpEventLog](#)

Apex Unexpected Excp Event Log captures information about unexpected exceptions in Apex code execution. This object is available in API version 61.0 and later.

[ApiTotalUsageEventLog](#)

API Total Usage Event Log contains details about Platform SOAP API, Platform REST API, and Bulk API requests. This object is available in API version 61.0 and later.

[AppAnalyticsQueryRequest](#)

Represents a request for AppExchange App Analytics data.

[AppDefinition](#)

Represents the metadata of an app and its navigation items. Metadata is returned only for apps that the current user can access. This object is available in API version 43.0 and later.

Standard Objects

[AppExtension](#)

Represents a connection between the Field Service mobile app and another app, typically for passing record data to the Salesforce mobile app or other apps. This object is available in API version 41.0 and later.

[ApplicationFormTemplate](#)

Represents the fields to capture application metadata as a template which is used in application tracking and processing. This object is available in API version 59.0 and later.

[AppMenuItem](#)

Represents the organization's default settings for items in the app menu or App Launcher.

[AppointmentAssignmentPolicy](#)

Stores information about resource assignment rules. This object is available in API version 52.0 and later.

[AppointmentScheduleAggr](#)

Records the utilization of a service resource, by date, for the Load Balancing appointment assignment policy. This object is available in API version 52.0 and later.

[AppointmentScheduleLog](#)

Stores service appointments of each service Resource. This object is used to calculate the utilization of a service resource for the AppointmentScheduleAggr object. This object is available in API version 52.0 and later.

[AppointmentSchedulingPolicy](#)

Represents a set of rules for scheduling appointments using Salesforce Scheduler. This object is available in API version 45.0 and later.

[AppointmentTopicTimeSlot](#)

Represents a lookup to a work type or a work type group for a time slot. This object is available in API version 52.0 and later.

[Approval](#)

Represents an approval request for a Contract.

[ApprovalAlertContentDef](#)

Represents the mapping that links specific user-created email templates to different notification events such as initial assignment or reassignment within an Advanced Approvals flow. This object is available in API version 66.0 and later.

[ApprovalSubmission](#)

Represents the instance of an approval request that's submitted for a record of the related object. This object is available in API version 62.0 and later.

[ApprovalSubmissionDetail](#)

ApprovalSubmissionDetail contains additional information about operations happening during the approval lifecycle. It will not hold any information that's already captured in the existing ApprovalSubmission and ApprovalWorkItem entities. This object is available in API version 62.0 and later.

[ApprovalWorkItem](#)

Contains run-time information about each step in an approval workflow, such as assignees and their decisions regarding the object's approval. Has a master-detail relationship with ApprovalSubmission. This object is available in API version 61.0 and later.

[ApprovalWorkItemCondition](#)

Represents a condition for starting and concluding an approval step that's evaluated as part of the smart approval process. This object is available in API version 64.0 and later.

[ApprovalWorkItemCriteria](#)

Represents the logic by which a smart approval request is evaluated. This object is available in API version 64.0 and later.

Standard Objects

[AppTabMember](#)

Represents the list of tabs for each of the available apps. This object is available in API version 43.0 and later.

[ApptBundleAggrDurDnscale](#)

Sums the duration of the bundle members, reduced by a predefined percentage. This object is available in API version 54.0 and later.

[ApptBundleAggrPolicy](#)

Policy that defines how the property values of the bundle members are aggregated and assigned to the bundle. This object is available in API version 54.0 and later.

[ApptBundleConfig](#)

Represents the general parameters that define the behavior of the bundle. This object is available in API version 54.0 and later.

[ApptBundlePolicy](#)

Policy that defines how the bundling of service appointments should be handled. This object is available in API version 54.0 and later.

[ApptBundlePolicySvcTerr](#)

Represents a link between the BundlePolicy and the ServiceTerritory. This object is available in API version 54.0 and later.

[ApptBundlePropagatePolicy](#)

Policy that defines which property values are inherited from the bundle to the bundle members or are assigned as constant values in the bundle members. This object is available in API version 55.0 and later.

[ApptBundleRestrictPolicy](#)

Policy that defines the restrictions that are considered while forming a bundle. This object is available in API version 54.0 and later.

[ApptBundleSortPolicy](#)

Policy that defines the properties by which the bundle members are sorted within the bundle. Can also be used in the automatic mode for determining the order of the automatic selection of bundle members. This object is available in API version 54.0 and later.

[AppUsageAssignment](#)

Provides application context for a record. A record can have different allowed actions or different related objects when it's created for different applications. For example, a Revenue Lifecycle Management order has a related `RevenueLifecycleManagementAppUsageAssignment`, so Salesforce knows it can create assets for that order. Available in API version 50.0 and later.

[ArchiveActivity](#)

Represents metadata retrieved for a single Archive process initiated by an action. Retrieved metadata can include status tracking, start and end times, record counts, and monitoring and auditing outcomes. This object is available in API version 65.0 and later.

[ArchivePolicyDefinition](#)

Represents a data lifecycle policy that, in each row, defines the scope, frequency, and rules for automated archiving or purging of records from a root entity, such as Contact or Lead. This object is available in API version 65.0 and later.

[Article Type __DataCategorySelection __DataCategorySelection](#)

A data category selection represents a data category that classifies an article. This object is available in API version 19.0 and later.

[Asset](#)

Represents an item of commercial value, such as a product sold by your company or a competitor, that a customer has purchased.

[AssetAction](#)

Represents a change made to a lifecycle-managed asset. The fields can't be edited. This object is available in API version 50.0 and later.

Standard Objects

[AssetActionSource](#)

Represents an optional way to record what transactions caused changes to lifecycle-managed assets. Use it to trace financial and other information about asset actions. This object supports Salesforce order products and work order line items, and transaction IDs from other systems. The fields can't be edited. This object is available in API version 50.0 and later.

[AssetAttribute](#)

Stores asset attributes to track and analyze asset conditions to improve their uptime. This object is available in API version 57.0 and later.

[AssetContractRelationship](#)

Represents a relationship between an asset and a contract. This object is available in API version 60.0 and later.

[AssetDowntimePeriod](#)

Represents a period during which an asset is not able to perform as expected. Downtime periods include planned activities, such as maintenance, and unplanned events, such as mechanical breakdown. This object is available in API version 49.0 and later.

[AssetOwnerSharingRule](#)

Represents the rules for sharing an Asset with users other than the owner. This object is available in API version 33.0 and later.

[AssetRateAdjustment](#)

Stores the tier rate adjustments for the asset rate card entries. This object is available in API version 62.0 and later.

[AssetRateCardEntry](#)

Stores the negotiated rate card entries that are associated with an asset in Revenue Cloud. This object is available in API version 62.0 and later.

[AssetRelationship](#)

Represents a non-hierarchical relationship between assets due to an asset modification; for example, a replacement, upgrade, or other circumstance. In Revenue Lifecycle Management, this object represents an asset or assets grouped in a bundle or set. This object is available in API version 41.0 and later.

[AssetShare](#)

Represents a sharing entry on an Asset. This object is available in API version 33.0 and later.

[AssetStatePeriod](#)

Represents a time span when an asset has the same quantity, amount, and monthly recurring revenue (MRR). An asset has as many asset state periods as there are changes to it (asset actions) during its lifecycle. The dashboard and related pages show the current asset state period. The fields can't be edited. This object is available in API version 50.0 and later.

[AssetStatePeriodAttribute](#)

Represents a virtual object that holds the key-value pair of the asset attribute in a specified asset state period. This object is a child object of AssetStatePeriod. This object is available in API version 60.0 and later.

[AssetTag](#)

Associates a word or short phrase with an Asset.

[AssetTokenEvent](#)

The documentation has moved to [AssetTokenEvent](#) in the *Platform Events Developer Guide*.

[AssetWarranty](#)

Defines the warranty terms applicable to an asset along with any exclusions and extensions. This object is available in API version 50.0 and later.

[AssignedResource](#)

Represents a service resource who is assigned to a service appointment in Field Service and Lightning Scheduler. Assigned resources appear in the Assigned Resources related list on service appointments. This object is available in API version 38.0 and later.

Standard Objects

[AssignmentRule](#)

Represents an assignment rule associated with a Case or Lead.

[AssociatedLocation](#)

Represents a link between an account and a location in Field Service. You can associate multiple accounts with one location. For example, a shopping center location may have multiple customer accounts.

[AsyncApexJob](#)

Represents an individual Apex sharing recalculation job, a batch Apex job, a method with the `future` annotation, or a job that implements `Queueable` or `Schedulable`. Use this object to query Apex batch jobs in your organization.

[AsyncOperationLog](#)

Represents an async operations log containing progress and status information about external synchronizations to the Omnichannel Inventory service. This object is available in API version 51.0 and later.

[AsyncOperationTracker](#)

Represents the status of an asynchronous request initiated from the Quote, Order, and CreditMemo objects. This object is available in API version 61.0 and later.

[AsyncOpSyndicationFeedFile](#)

Represents the sync status of file-related information shared with external channels such as Facebook and Instagram. This object is available in API version 64.0 and later.

[AttachedContentDocument](#)

This read-only object contains all `ContentDocument` objects associated with an object.

[AttachedContentNote](#)

This read-only object contains all `ContentNote` objects associated with an object. This object is available in API version 35.0 and later.

[Attachment](#)

Represents a file that a User has uploaded and attached to a parent object.

[AttachmentEventLog](#)

Attachment event logs contain information about attachments. This object is available in API version 65.0 and later.

[AttribModel](#)

Represents an attribution model used with Personalization, Attribution, and Campaign Influence, including model weights and touch type. This object is available in API version 62.0 and later.

[AttribModelStage](#)

Represents a funnel stage that's used in a predefined or custom attribution configuration. Available in API version 62.0 and later.

[AttribModelStageMetric](#)

Represents the engagement signal metrics that you select when you configure a funnel stage for an attribution configuration. Available in API version 63.0 and later.

[AttributeDefinition](#)

Represents a product, asset, or object attribute, for example, a hardware specification or software detail. This object is available in API version 57.0 and later.

[AttributePicklist](#)

Represents a custom picklist for an asset attribute. This object is available in API version 57.0 and later.

[AttributePicklistValue](#)

Represents the values of an asset attribute picklist. This object is available in API version 57.0 and later.

Standard Objects

[AsyncReportRunEventLog](#)

Async Report Run Event Log is used for reporting scheduled requests. This category includes dashboard refreshes, asynchronous reports, schedule reports, and analytics snapshots. This object is available in API version 61.0 and later.

[Audience](#)

Represents an audience that is defined by criteria and can be assigned and used for targeting in an Experience Cloud site. This object is available in API version 44.0 and later.

[AuraDefinition](#)

Represents an Aura component definition, such as component markup, a client-side controller, or an event. This object is available in API version 32.0 and later.

[AuraDefinitionBundle](#)

Represents a Lightning Aura component definition bundle, such as a component or application bundle. A bundle contains a Lightning Aura component definition and all its related resources. This object is available in API version 32.0 and later.

[AuraDefinitionBundleInfo](#)

For internal use only.

[AuraDefinitionInfo](#)

For internal use only.

[AuraRequestEventLog](#)

Aura Request Event Log contains details of requests to Apex methods from Aura and Lightning web components. This object is available in API version 61.0 and later.

[AuthConfig](#)

Represents authentication options for My Domain and Experience Cloud site login pages. This object is available in API version 32.0 and later.

[AuthConfigProviders](#)

Represents an authentication provider that's configured in an organization. AuthConfigProviders is a child of the AuthConfig object. This object is available in API version 32.0 and later.

[AuthorizationForm](#)

Represents the specific version and effective dates of a form that is associated with consent, such as a privacy policy or terms and conditions. This object is available in API version 46.0 and later.

[AuthorizationFormConsent](#)

Represents the date and way in which a user consented to an authorization form. This object is available in API version 46.0 and later.

[AuthorizationFormDataUse](#)

Represents the data use consented to in an authorization form. This object is available in API version 46.0 and later.

[AuthorizationFormText](#)

Represents an authorization form's text and language settings. This object is available in API version 46.0 and later.

[AuthProvider](#)

Represents an authentication provider (auth provider). An auth provider lets users log in to your Salesforce org from an external service provider, such as Facebook, Google, or GitHub. This object is available in API version 27.0 and later.

[AuthProvParamFwdAllowlist](#)

Represents an allowlisted URL parameter that can be forwarded from authentication provider client configuration URLs to the authorization URL. Use this type to add custom functionality to authentication providers. For example, allowlist a `ui_locales` parameter and use it to send a user's language preference from Salesforce to the third-party provider's login page. This object is available in API version 62.0 and later.

Standard Objects

[AuthSession](#)

The AuthSession object represents an individual user session in your organization. This object is available in versions 29.0 and later.

[AutomatedAction](#)

Represents the configuration of an automated action, such as a workflow rule. This object is available in API version 57.0 and later.

[AutomatedActionCondition](#)

Represents the logical operator details for evaluating conditions in an automated action. This object is available in API version 57.0 and later.

[AutomatedActionOverride](#)

Represents a modified attribute of a shared automated action. For example, the modified attribute can contain customizations for your business. This object is available in API version 58.0 and later.

[AutomatedActionParameter](#)

Represents the values or field references evaluated by the automated action. This object is available in API version 57.0 and later.

[AutomatedActionReminder](#)

Represents a reminder to the end user to take an action in the future. This object is available in API version 58.0 and later.

[BackgroundOperation](#)

Represents a background operation in an asynchronous job queue. This object is available in API version 35.0 and later.

[BackgroundOperationResult](#)

Stores error messages generated when or importing data into big objects using Bulk API. This is a big object, available in API version 37.0 and later.

[BatchApexErrorEvent](#)

The documentation has moved to [BatchApexErrorEvent](#) in the *Platform Events Developer Guide*.

[BillingBatchScheduler](#)

Represents a scheduled processing job that triggers recurring invoice batch runs and payment batch runs in Subscription Management. This object is available in API version 55.0 and later.

[BillingPeriodItem](#)

Represents one payment period for a subscription. The billing period item is used to pass billing information to an invoice line item in Subscription Management. This object is available in API version 55.0 and later.

[BillingPolicy](#)

Represents a group of billing treatments, which define the rules for how to invoice a customer for an order item. This object is available in API version 55.0 and later.

[BillingSchedule](#)

Stores the order item information used in the invoicing process. This object is available in API version 55.0 and later.

[BillingScheduleGroup](#)

Represents a consolidated view of all billing schedules related to the order items generated from one asset, including new orders and amendment orders. This object is available in API version 55.0 and later.

[BillingTreatment](#)

Defines how Subscription Management bills an order item. The Exclude From Billing field controls whether the order item is invoiced. Child billing treatment items control how much of the order item's balance is invoiced for each invoice across the subscription's lifecycle. Billing treatments are assigned to order items based on the parent billing policy's Billing Treatment Selection field. This object is available in API version 55.0 and later.

Standard Objects

[BillingTreatmentItem](#)

A billing treatment item defines how the order item's total amount is distributed into billing schedules over the course of the order item's lifecycle. In the Subscription Management pilot, billing treatments must have only one billing treatment item, so that the billing treatment item covers 100% of the order item's total value. This object is available in API version 55.0 and later.

[BlockedRedirectEventLog](#)

Blocked Redirect events capture information about blocked redirections from Salesforce to untrusted and malformed URLs. This object is available in API version 65.0 and later.

[Bookmark](#)

Represents a link between opportunities that share common information.

[BotDefinition](#)

Represents a top level object for Einstein Bots or Agentforce Agents. This object is available in API version 60.0 and later.

[BotVersion](#)

Represents a version of a bot or agent defined by a BotDefinition record. This object is available in API version 63.0 and later.

[BrandingSet](#)

Represents the definition of a set of branding properties for an Experience Builder site, as defined in the Theme panel in Experience Builder. This object is available in API version 40.0 and later.

[BrandTemplate](#)

Letterhead for HTML EmailTemplate.

[Brief](#)

Represents a marketing brief. A brief contains information that's used for positioning and grounding a marketing campaign. Agentforce can help you create a campaign that best fits the goals and requirements in your brief. This object is available in API version 61.0 and later.

[BriefcaseAssignment](#)

Represents the assignment of a briefcase definition to selected users and user groups. This object is available in API version 50.0 and later.

[BriefcaseDefinition](#)

Represents a briefcase definition. A briefcase makes selected records available for users to view when they're offline in the Salesforce Field Service mobile app for iOS and Android. This object is available in API version 50.0 and later.

[BriefcaseRule](#)

Represents a rule that specifies records for a briefcase definition. This object is available in API version 50.0 and later.

[BriefcaseRuleFilter](#)

Represents a filter criteria for a briefcase rule. This object is available in API version 50.0 and later.

[BroadcastCommAudience](#)

Represents the audience that the broadcast communication is sent to. This object is available in API version 56.0 and later.

[BroadcastCommunication](#)

Represents a broadcast communication related to an incident. This object is available in API version 56.0 and later.

[BroadcastTopic](#)

Represents a definition of a broadcast topic. A broadcast topic is associated with a list of Experience Cloud network sites for Service Cloud and collaboration rooms for Sales Cloud. The topic is created for a specific user role. Collaboration rooms are linked to Slack channels. This object is available in API version 55.0 and later.

Standard Objects

[BroadcastTopicGroup](#)

Represents a junction object that relates a group to an alert type broadcast topic. The broadcast sends the alert to this group. This object is available in API version 57.0 and later.

[BroadcastTopicNetwork](#)

Represents a link between a broadcast topic and the Experience Cloud network site for Service Cloud. This object is available in API version 56.0 and later.

[BrowserPolicyViolation](#)

Represents a violation that occurred within the last seven days related to the Trusted URLs and Trusted URLs for External Redirects allowlists. These violations include blocked resource requests based on your content security policy (CSP) and blocked redirections. This object is available in API version 61.0 and later.

[BulkApi2EventLog](#)

Bulk API 2 event logs contain details about Bulk API 2.0 requests. This object is available in API version 61.0 and later.

[BulkApiEventLog](#)

Bulk API event logs contain details about Bulk API requests. This object is available in API version 61.0 and later.

[BulkApiRequestEventLog](#)

The Bulk API request event captures when Bulk API requests are received to create a job, update a job, create a batch, update a batch, and when a job completes. This object is available in API version 65.0 and later.

[BusinessBrand](#)

Represents a unique brand for a business that belongs to a parent entity. This object is available in API version 53.0 and later.

[BusinessAlert](#)

Represents information about insight notifications that Einstein Relationship Insights explores, such as news mentions, job updates, and relationships. This object is available in API version 57.0 and later.

[BusinessAlertStatus](#)

Represents information about the read status of an insight alert. This object is available in API version 57.0 and later.

[BusinessHours](#)

Specifies the business hours of your support organization. Escalation rules are run only during these hours.

[Business Process](#)

Represents a business process. Business Processes track separate sales, lead, support, and solution lifecycles by displaying different picklist values according to each user's profile.

[BusinessProcessDefinition](#)

Setup object that stores information about stages in a customer lifecycle map. The stages are associated with surveys and questions created using Salesforce Surveys. This object is reserved for internal use, and is available in API version 49.0 and later.

[BusinessProcessFeedback](#)

Setup object that stores information about the survey and the question associated with each stage in a customer lifecycle map. Customer lifecycle maps are used to track the scores provided by customers across their lifecycle using Salesforce Surveys. This object is reserved for internal use, and is available in API version 49.0 and later.

[BusinessProcessGroup](#)

Setup object that stores information about customer lifecycle maps. Customer lifecycle maps are used to track the scores provided by customers across their lifecycle using Salesforce Surveys. This object is reserved for internal use, and is available in API version 49.0 and later.

[BuyerAccount](#)

Represents an account that is enabled as a buyer for Lightning B2B Commerce. This object is available in API version 48.0 and later.

Standard Objects

[BuyerCriteria](#)

Represents the buyer context qualifier of locale for any buyer groups of type Market. This object is available in API version 58.0 and later.

[BuyerGroup](#)

Associates group qualifiers (entitlements, price books, promotions, and shipping methods) with buyer members based on buyer account ID or on the localized language and currency of the market browsed in a webstore. This object is available in API version 57.0; amended to support Market in version 58.0 and later.

[BuyerGroupBuyerCriteria](#)

Associates a buyer group that is enabled for webstores supporting multiple languages and currencies with BuyerCriteria that define those languages and currencies. This object is available in API version 58.0 and later.

[BuyerGroupMember](#)

Represents a member of a buyer group. This object is available in API version 55.0 and later.

[BuyerGroupPricebook](#)

Represents a buyer group price book used in Lightning B2B Commerce. This object is available in API version 48.0 and later.

[BuyerGroupRelatedObject](#)

Used to associate currencies and supported ship-to countries with a buyer group and its price books, promotions, and entitlements. Supports buyer experience when buyer group members shop in stores enabled for multiple locales. This object is available in API version 58.0 and later.

[CalcProcStepRelationship](#)

Defines a parent-child relationship between two Expression Set Steps in an Expression Set Version. The label for this object is Expression Set Step Relationship. This object is available in API version 53.0 and later.

[CalculatedInsightRangeBound](#)

Stores the information required to calculate a range-bound data insight. This object is available in API version 59.0 and later.

[CalculationMatrix](#)

Matches input values to a table row and returns the row's output values. The label for this object is Decision Matrix. This object is available in API version 53.0 and later.

[CalculationMatrixColumn](#)

Defines a column in a Decision Matrix. The label for this object is Decision Matrix Column. This object is available in API version 53.0 and later.

[CalculationMatrixRow](#)

Defines a row in a Decision Matrix. The label for this object is Decision Matrix Row. This object is available in API version 53.0 and later.

[CalculationMatrixVersion](#)

Defines a version of a Decision Matrix. The label for this object is Decision Matrix Version. This object is available in API version 53.0 and later.

[CalculationProcedure](#)

Performs a series of calculations using matrix lookups and user-defined variables and constants. The label for this object is Expression Set. This object is available in API version 53.0 and later.

[CalculationProcedureStep](#)

Defines a step in an Expression Set. The label for this object is Expression Set Step. This object is available in API version 53.0 and later.

Standard Objects

[CalculationProcedureVariable](#)

Defines a variable in an Expression Set. The label for this object is Expression Set Variable. This object is available in API version 53.0 and later.

[CalculationProcedureVersion](#)

Defines a version of an Expression Set. The label for this object is Expression Set Version. This object is available in API version 53.0 and later.

[Calendar](#)

Represents a calendar. This can be a default user calendar, public calendar, resource calendar, or holiday calendar. This object is available in API version 45.0 and later.

[CalendarView](#)

These calendars can be created and assigned to users other than the creator. Available calendars include object, shared, public, resource, and user list calendars. Object calendars represent a calendar based on a Salesforce object, either standard or custom. This object is available in API version 51.0 and later.

[CallCenter](#)

Represents a call center, which is a logical representation of a single computer-telephony integration (CTI) system instance in an organization.

[CallCenterRoutingMap](#)

Stores a mapping between a user or queue in a Salesforce org to a user or queue in an external system's call center. This object is available in API version 53.0 and later.

[CallCoachingMediaProvider](#)

Represents the media provider for call recordings. This object is available in API version 49.0 and later.

[CallCtrAgentFavTrfrDest](#)

Represents a transfer destination that has been marked (starred) as a favorite in the Omni-Channel softphone by a contact center agent for voice call transfers. This object is available in API version 55.0 and later.

[CallCtrAgentFavTrfrDestShare](#)

Represents a sharing entry on a favorite transfer destination in the Omni-Channel softphone for voice call transfers. This object is available in API version 55.0 and later.

[CallDisposition](#)

Represents a call result value that sales reps select when logging a call. This object is available in API version 47.0 and later.

[CallDispositionCategory](#)

Represents the call outcome of a phone call that is used in reports and branching criteria for cadences. This object is available in API version 47.0 and later.

[CallTemplate](#)

Represents a call script for users to read when making calls.

[Campaign](#)

Represents and tracks a marketing campaign, such as a direct mail promotion, webinar, or trade show.

[CampaignInfluence](#)

Represents the association between a campaign and an opportunity in Customizable Campaign Influence. This object is available in API version 37.0 and later.

[CampaignInfluenceModel](#)

This read-only object represents a campaign influence model in Customizable Campaign Influence. Use campaign influence models to group `CampaignInfluence` records created by a specific set of triggers and workflows that you define. The Primary Campaign Source influence model is the default model. This object is available in API version 37.0 and later.

Standard Objects

[CampaignMember](#)

The CampaignMember object represents the relationship between a campaign and either a lead or a contact. If the Accounts as Campaign Members setting is enabled in an org, CampaignMember can also represent the relationship between a campaign and an account.

[CampaignMemberStatus](#)

One or more member status values defined for a campaign.

[CampaignOwnerSharingRule](#)

Represents the rules for sharing a campaign with User records other than the owner or anyone above the owner in the role hierarchy.

[CampaignShare](#)

Represents a sharing entry on a Campaign.

[CampaignTag](#)

Associates a word or short phrase with a Campaign.

[CardPaymentMethod](#)

Represents a credit card or debit card payment method, which implements the PaymentMethod object. This object is available in API version 48.0 and later.

[CartCheckoutSession](#)

Represents a checkout session used in Lightning B2B Commerce checkout. This object is available in API version 48.0 and later.

[CartDeliveryGroup](#)

Represents shipping information for the delivery of items in an order against a store built with B2B Commerce or D2C Commerce. This object is available in API version 49.0 and later.

[CartDeliveryGroupMethod](#)

Represents the selected delivery method for a cart delivery group used in Lightning B2B Commerce checkout. This object is available in API version 49.0 and later.

[CartDeliveryGroupMethodAdj](#)

Represents the shipping promotion discount for a shipping method. This object is available in API version 60.0 and later.

[CartItem](#)

Represents an item in a `WebCart` that's active in a store built with B2B. Cart item can be of type `Product` or `Charge`. This object is available in API version 49.0 and later.

[CartItemAttribute](#)

Represents the attributes associated with a cart item, stored as key-value pairs. These attributes are derived from the product and carried forward to the order during checkout. This object is available in API version 66.0 and later.

[CartItemPriceAdjustment](#)

Price adjustment for a cart item. This object is available in API version 52.0 and later.

[CartTax](#)

Represents taxes for a line item in a `WebCart` that's active in a store built with B2B Commerce or D2C Commerce. This object is available in API version 49.0 and later.

[CartValidationOutput](#)

Associate errors to cart entities, such as cart line items, delivery groups, and the like, in a store built with B2B Commerce or D2C Commerce. An example error is "Out of stock." Available in API version 49.0 and later.

[Case](#)

Represents a case, which is a customer issue or problem.

Standard Objects

[CaseArticle](#)

Represents the association between a Case and a KnowledgeArticle. This object is available in API version 20.0 and later.

[CaseComment](#)

Represents a comment that provides additional information about the associated Case.

[CaseContactRole](#)

Represents the role that a given Contact plays on a Case.

[CaseHistory](#)

Represents historical information about changes that have been made to the associated Case.

[CaseHistory2](#)

Represents historical information about owner and status changes that have been made to the associated Case. This object is available in API version 59.0 and later.

[CaseMilestone](#)

Represents a milestone (required step in a customer support process) on a Case. This object is available in API version 18.0 and later.

[CaseOwnerSharingRule](#)

Represents the rules for sharing a case with users other than the owner.

[CaseParticipant](#)

Represents a junction between a case, and an account or a contact. This object stores the details of the participant associated with a case. This participant could be the applicant, co-applicant, a household, or even a business account. This object is available in API version 54.0 and later.

[CaseRelatedIssue](#)

This object acts as a junction between a customer issue (Case) and the Incident or Problem that represents an associated service failure. This object is available in API version 53.0 and later.

[CaseShare](#)

Represents a sharing entry on a Case.

[CaseSolution](#)

Represents the association between a Case and a Solution.

[CaseStatus](#)

Represents the status of a Case, such as New, On Hold, or In Process.

[CaseSubjectParticle](#)

Represents the Social Business Rules custom format for the **Case Subject** field on cases created from inbound social posts. This object is available in API version 41.0 and later.

[CaseTag](#)

Associates a word or short phrase with a Case

[CaseTeamMember](#)

Represents a case team member, who works with a team of other users to help resolve a case.

[CaseTeamRole](#)

Represents a case team role. Every case team member has a role on a case, such as "Customer Contact" or "Case Manager."

[CaseTeamTemplate](#)

Represents a predefined case team, which is a group of users that helps resolve a case.

[CaseTeamTemplateMember](#)

Represents a member on a predefined case team, which is a group of users that helps resolve cases.

Standard Objects

[CaseTeamTemplateRecord](#)

The CaseTeamTemplateRecord object is a linking object between the Case and CaseTeamTemplate objects. To assign a predefined case team to a case (customer inquiry), create a CaseTeamTemplateRecord record and point the `ParentId` to the case and the `TeamTemplateId` to the predefined case team.

[CategoryData](#)

Represents a logical grouping of Solution records.

[CategoryNode](#)

Represents a tree of Solution categories.

[CategoryNodeLocalization](#)

When the Translation Workbench is enabled for your organization, the CategoryNodeLocalization object provides the translation of the label of a solution category.

[ChangeRequest](#)

Represents a decision to implement a formal request for a change (RFC). This object is available in API version 53.0 and later.

[ChangeRequestRelatedIssue](#)

Represents a junction object that relates a ChangeRequest to an Incident or Problem due to a service failure. This object is available in API version 53.0 and later.

[ChangeRequestRelatedItem](#)

Represents a junction object that relates a ChangeRequest to an Asset. This object is available in API version 53.0 and later.

[ChangeSetOperationEventLog](#)

Change Set Operation events contain information from change set migrations. This object is available in API version 65.0 and later.

[ChannelObjectLinkingRule](#)

Represents a rule for linking a channel interaction with an object (such as Lead or Contact). This object is available in API version 47.0 and later.

[ChannelProgram](#)

Represents a channel program that vendors use to market and sell their products through channel partners. This object is available in API version 41.0 and later.

[ChannelProgramLevel](#)

Represents a level, based on member experience, in a channel program. This object is available in API version 41.0 and later.

[ChannelProgramMember](#)

Represents a partner who is a member of a channel program. This object is available in API version 41.0 and later.

[ChatterActivity](#)

ChatterActivity represents the number of posts and comments made by a user and the number of comments and likes on posts and comments received by the same user. This object is available in API version 23.0 and later.

[ChatterAnswersActivity](#)

Represents the reputation of a User in Chatter Answers zones. This object is available in API version 25.0 and later.

[ChatterAnswersReputationLevel](#)

Represents a reputation level within a Chatter Answers zone. This object is available in API version 26.0 and later.

[ChatterConversation](#)

Represents a private conversation in Chatter, consisting of messages that conversation members have sent or received. This object is available in API version 23.0 and later.

Standard Objects

[ChatterConversationMember](#)

Represents a member of a private conversation in Chatter. A member has either sent messages to or received messages from other conversation participants. This object is available in API version 23.0 and later.

[ChatterExtension](#)

Represents a Rich Publisher App that's integrated with the Chatter publisher. This object is available in API version 41.0 and later.

[ChatterExtensionConfig](#)

Configuration for the Chatter extension for Experience Cloud sites. This object is available in API version 41.0 and later.

[ChatterMessage](#)

Represents a message sent as part of a private conversation in Chatter. This object is available in API version 23.0 and later.

[ClientBrowser](#)

Represents a cookie added to the browser upon login, and also includes information about the browser application where the cookie was inserted. This object is available in version 28.0 and later.

[CollaborationGroup](#)

Represents a Chatter group. This object is available in API version 19.0 and later.

[CollaborationGroupMember](#)

Represents a member of a Chatter group. This object is available in API version 19.0 and later.

[CollaborationGroupMemberRequest](#)

Represents a request to join a private Chatter group. This object is available in API version 21.0 and later.

[CollaborationGroupRecord](#)

Represents the records associated with Chatter groups.

[CollaborationInvitation](#)

Represents an invitation to join Chatter, either directly or through a group. This object is available in API version 21.0 and later.

[CollaborationRoom](#)

Represents a collaboration room, which links Salesforce to a Slack channel used by applications with specific use cases, such as swarming or reporting. This object is available in API version 55.0 and later.

[CollabDocumentMetric](#)

Represents the engagement metrics for a Quip thread (document or spreadsheet) that's linked to a Salesforce record. This object is available in API version 50.0 and later.

[CollabDocumentMetricRecord](#)

Represents an association between a CollabDocumentMetric and a Salesforce record. It tracks which Salesforce record, such as an Account or Contact, is linked to a Quip thread for which metrics were gathered using CollabDocumentMetric.

CollabDocumentMetricRecord is available in API version 50.0 and later.

[CollabTemplateMetric](#)

Represents the engagement metrics for a Quip template. This object is available in API version 50.0 and later.

[CollabTemplateMetricRecord](#)

Represents an association between a CollabTemplateMetric and a Salesforce record. It tracks which Salesforce record, such as an Account or Contact, is linked to a Quip template for which metrics were gathered using CollabTemplateMetric.

CollabTemplateMetricRecord is available in API version 50.0 and later.

[CollabUserEngagementMetric](#)

Represents the user engagement metrics for a Quip thread in a Quip template or document. This object is available in API version 50.0 and later.

Standard Objects

[CollabUserEngmtRecordLink](#)

Represents an association between a CollabUserEngagementMetric and a Salesforce record. It tracks which Salesforce record, such as an Account or Contact, is associated with the user engagement metric. This object is available in API version 50.0 and later.

[ColorDefinition](#)

Represents the color-related metadata for a custom tab. This object is available in API version 43.0 and later.

[ContCalloutSummaryEventLog](#)

Continuation Callout Summary events contain information about all of the asynchronous callouts performed during a transaction, their response status codes, execution times, and URL endpoint destinations. This object is available in API version 65.0 and later.

[CombinedAttachment](#)

This read-only object contains all notes, attachments, Google Docs, documents uploaded to libraries in Salesforce CRM content, and files added to Chatter that are associated with a record.

[CommerceEntitlementBuyerGroup](#)

Represents the entitlement policy for a buyer group. This object is available in API version 49.0 and later.

[CommerceEntitlementPolicy](#)

Represents an entitlement policy, which determines what products and prices a user can see. This object is available in API version 49.0 and later.

[CommerceEntitlementPolicyShare](#)

Represents the entitlement rule for sharing products and prices with users other than the owner. This object is available in API version 49.0 and later.

[CommerceEntitlementProduct](#)

Represents the entitlement policy for a product. This object is available in API version 49.0 and later.

[CommissionSchedule](#)

Represents a commission calculation and rate definition. Calculates commission values for a commissionable event.

[CommissionScheduleAssignment](#)

Represents the commission calculation applicable to a specific product or producer for one or multiple commissionable events.

[CommSubscription](#)

Represents the subscription options for a specific communication. This object is available in API version 48.0 and later.

[CommSubscriptionChannelType](#)

Represents the engagement channel through which you can reach a customer for a communication subscription. This object is available in API version 48.0 and later.

[CommSubscriptionConsent](#)

Represents a customer's consent to a communication subscription. This object is available in API version 48.0 and later.

[CommSubscriptionTiming](#)

Represents a customer's timing preferences for receiving a communication subscription. This object is available in API version 48.0 and later.

[Community \(Zone\)](#)

Represents a zone that contains Idea or Question objects.

[ConcurApexLimitEventLog](#)

Concurrent Apex Limit event logs contain information about long-running concurrent Apex requests in your org that Salesforce terminated after reaching your org's concurrency limit. Requests with an established Apex context that execute for 5 seconds are counted towards your org's limit of concurrent long-running requests. (Asynchronous requests don't count towards the limit.) When the long-running requests exceed the org default limit, additional long-running requests are denied. This object is available in API version 61.0 and later.

[ConnectedApplication](#)

Represents a connected app and its details; all fields are read-only.

[ConferenceNumber](#)

Holds the telephone number for an external event shown in the Salesforce Today feature in the Salesforce mobile app. This object is available in API version 35.0 and later.

[Consumption Rate](#)

Consumption rates describe the billing rate for a range of usage within a consumption schedule. All consumption schedules require at least one consumption rate in order to rate usage on a usage product. This object is available in API version 45.0 and later.

[Consumption Schedule](#)

A consumption schedule organizes a set of consumption rates by which usage-based products are quoted and billed. This object is available in API version 45.0 and later.

[Contact](#)

Represents a contact, which is a person associated with an account.

[ContactCenterChannel](#)

Represents a junction object that relates a Bring Your Own Channel for Contact Center as a Service (CCaaS) messaging channel to a CallCenter object for Bring Your Own Channel for CCaaS. This object also represents the routing details for a voicemail configuration and routing information for callback requests. This object is available in API version 56.0 and later.

[ContactCleanInfo](#)

Stores the metadata Data.com Clean uses to determine a contact record's clean status. Helps you automate the cleaning or related processing of contact records. ContactCleanInfo includes a number of bit vector fields.

[ContactDailyMetric](#)

Represents the daily engagement metrics for a contact. This object is available in API version 52.0 and later.

[ContactMonthlyMetric](#)

Represents the monthly engagement metrics for a contact. This object is available in API version 52.0 and later.

[ContactPointAddress](#)

Represents a contact's billing or shipping address, which is associated with an individual or person account. This object is available in API version 49.0 and later.

[ContactPointConsent](#)

Represents a customer's consent to be contacted via a specific contact point, such as an email address or phone number. This object is available in API version 48.0 and later.

[ContactPointEmail](#)

Represents a contact's email, which is associated with an individual or person account. This object is available in API version 48.0 and later.

[ContactPointPhone](#)

Represents a contact's phone number, which is associated with an individual or person account. This object is available in API version 48.0 and later.

Standard Objects

[ContactPointTypeConsent](#)

Represents consent for a contact point type, such as email or phone. This object is available in API version 45.0 and later.

[ContactOwnerSharingRule](#)

Represents the rules for sharing a contact with a User other than the owner.

[ContactRequest](#)

Represents a customer's request for support to get back to them about an issue. This object is available in API version 45.0 and later.

[ContactRequestShare](#)

Represents a list of access levels to a ContactRequest with an explanation of the access level. This object is available in API version 45.0 and later.

[ContactShare](#)

Represents a list of access levels to a Contact along with an explanation of the access level. For example, if you have access to a record because you own it, the `ContactAccessLevel` is `All` and `RowCause` is `Owner`.

[ContactSuggestionInsight](#)

Represents a suggestion for a new contact record. Available in API versions 45.0 and later.

[ContactTag](#)

Associates a word or short phrase with a Contact.

[ContentAsset](#)

Represents a Salesforce file that has been converted to an asset file in a custom app in Lightning Experience. Use asset files for org setup and configuration. Asset files can be packaged and referenced by other components. This object is available in API version 38.0 and later.

[ContentBody](#)

Represents the body of a file in Salesforce CRM Content or Salesforce Files. This object is available in API version 40.0 and later.

[ContentDistribution](#)

Represents information about sharing a document externally. This object is available in API version 32.0 and later.

[ContentDistributionEventLog](#)

Content Distribution events contain information about content distributions and deliveries to users. This object is available in API version 65.0 and later.

[ContentDistributionView](#)

Represents information about views of a shared document. This read-only object is available in API version 32.0 and later.

[ContentDocument](#)

Represents a document that was uploaded to a library in Salesforce Files or Salesforce CRM content. This object is available in versions 17.0 and later for Salesforce CRM. This object is available in API version 21.0 and later for Salesforce Files.

[ContentDocumentHistory](#)

Represents the history of a document. This object is available in versions 17.0 and later.

[ContentDocumentLink](#)

Represents the link between a Salesforce CRM Content document, Salesforce file, or ContentNote and where it's shared. A file can be shared with other users, groups, records, and Salesforce CRM Content libraries. This object is available in versions 21.0 and later for Salesforce CRM Content documents and Salesforce Files.

[ContentDocumentListViewMapping](#)

Represents an association between a ListView and a Quip ContentDocument. Applies to Quip file types only. Maintains the mapping between a list view and Quip document when the list view is exported to a newly created Quip document. This object is available in API version 44.0 and later.

Standard Objects

[ContentDocumentSubscription](#)

Represents a subscription for a user following or commenting on a file in a library. This object is available in API version 42.0 and later.

[ContentDocLinkEventLog](#)

Content Document Link events contain sharing information for content documents. This object is available in API version 65.0 and later.

[ContentFolder](#)

Represents a folder in a content library for adding files. This object is available in API version 34.0 and later.

[ContentFolderItem](#)

Represents a file (ContentDocument) or folder (ContentFolder) that resides in a ContentFolder in a ContentWorkspace. This object is available in API version 35.0 and later.

[ContentFolderLink](#)

Defines the association between a library and its root folder. This object is available in API version 34.0 and later.

[ContentFolderMember](#)

Defines the association between a file and a folder. This object is available in API version 34.0 and later.

[ContentHubItem](#)

Represents a file or folder in a Files Connect external data source, such as Microsoft SharePoint or OneDrive for Business. This object is available in API version 33.0 and later.

[ContentHubRepository](#)

Represents a Files Connect external data source such as Microsoft SharePoint or OneDrive for Business. This object is available in API version 33.0 and later.

[ContentNote](#)

Represents a note created with the enhanced note-taking tool, released in Winter '16. This object is available in API version 32.0 and later.

[ContentNotification](#)

Represents a notification for a file. This object is available in API version 42.0 and later.

[ContentTagSubscription](#)

Represents a subscription for a user following a tag on a file. This object is available in API version 42.0 and later.

[ContentTaxonomy](#)

Represents a content taxonomy, which is used to classify and organize Salesforce CMS content. To create a hierarchy of terms in a content taxonomy, use this object in addition to the ContentTaxonomyTerm, ContentTaxonomyRelatedTerm, and ContentTaxonomyTermRelatedTerm objects. This object is available in API version 63.0 and later.

[ContentTaxonomyRelatedTerm](#)

Represents the relationship between a term and the content taxonomy to which the term belongs. This object is available in API version 63.0 and later.

[ContentTaxonomyTerm](#)

Represents a term in a content taxonomy. Terms describe what content is or how it's used, and they're organized in parent-child relationships in the taxonomy hierarchy. This object is available in API version 63.0 and later.

[ContentTaxonomyTermRelatedTerm](#)

Represents the relationship between two terms in a content taxonomy. This object is available in API version 63.0 and later.

[ContentTaxonomyTermRelationshipType](#)

Represents the type of relationship between two terms in a content taxonomy. This object is available in API version 63.0 and later.

Standard Objects

[ContentTransferEventLog](#)

ContentTransferEventLog stores information about content transfer events, such as downloads, uploads, and previews. This information includes events performed on files and attachments to records. This object is available in API version 62.0 and later.

[ContentUserSubscription](#)

Represents a subscription for a user following another user. This object is available in API version 42.0 and later.

[ContentVersion](#)

Represents a specific version of a document in Salesforce CRM content or Salesforce Files. This object is available in versions 17.0 and later for Salesforce CRM content documents. This object is available in versions 20.0 and later for Salesforce Files.

[ContentVersionComment](#)

Represents a comment on a version of a file. This object is available in API version 42.0 and later.

[ContentVersionHistory](#)

Represents the history of a specific version of a document. This object is available in version 17.0 and later.

[ContentVersionRating](#)

Represents a rating on a version of a file. This object is available in API version 42.0 and later.

[ContentWorkspace](#)

Represents a content library. This object is available in versions 17.0 and later.

[ContentWorkspaceDoc](#)

Represents a link between a document and a public library in Salesforce CRM Content. This object is available in versions 17.0 and later.

[ContentWorkspaceMember](#)

Represents a member of a content library. This object is available in API version 40.0 and later.

[ContentWorkspacePermission](#)

Represents a library permission. This object is available in API version 40.0 and later.

[ContentWorkspaceSubscription](#)

Represents a subscription for a user following a library. This object is available in API version 42.0 and later.

[ContextParamMap](#)

Represents optional context data for a Conversation or a ConversationParticipant. This object is available in API version 57.0 and later.

[Contract](#)

Represents a contract (a business agreement) associated with an Account.

[ContractContactRole](#)

Represents the role that a Contact plays on a Contract.

[ContractLineItem](#)

Represents a product covered by a service contract (customer support agreement). This object is available in API version 18.0 and later.

[ContractLineOutcome](#)

Represents information on a contract line outcome's captured data and other related parameters that are used when capturing data. This object is available in API version 58.0 and later.

[ContractLineOutcomeData](#)

Represents the contract line outcome's captured data. It stores the data that was captured between the contract line outcome's start date and end date. This object is available in API version 58.0 and later.

Standard Objects

[ContractStatus](#)

Represents the status of a Contract, such as Draft, InApproval, Activated, Terminated, or Expired.

[ContractTag](#)

Associates a word or short phrase with a Contract.

[ConvAnalysisSummary](#)

Represents the information stored for each run or refresh of Sales Signals. This object is available in API version 63.0 and later.

[ConvAnalysisTopic](#)

Represents a topic generated from the Sales Signals refresh or run. For example, a product experiencing issues due to high pricing could be a topic identified through the analysis of multiple calls. This object is available in API version 63.0 and later.

[ConvAnalysisTopicEntry](#)

Represents a single entry under the ConvAnalysisTopic object. An entry represents a segment of a video or voice call that is associated with a conversation analysis topic. This object is available in API version 63.0 and later.

[Conversation](#)

Represents a conversation between an end user and an agent. Available in API version 49.0 and later.

[ConversationApiLog](#)

Logs of an API operation on a specific conversation object done using the Conversation Service API. This object is available in API version 63.0 and later.

[ConversationContextEntry](#)

Represents the context of a message or an event in the chat history between an agent and a messaging user. This object is available in API version 47.0 and later.

[ConversationChannelDefinition](#)

Represents a configurable definition of a conversation channel that's implemented for Interaction Service for Bring Your Own Channel for Messaging and Bring Your Own Channel for CCaaS messaging channels. This object is available in API version 60.0 and later.

[ConversationEntry](#)

Represents a message or event in a voice call or messaging session. The schema on this page only applies to conversation entries for legacy chat. Refer to the ConversationEntry (Off-Core) schema in the [Messaging Object Model](#) guide to see the ConversationEntry schema for Enhanced Channels. This object is available in API version 43.0 and later.

[ConversationParticipant](#)

Represents an active participant in a conversation. A new ConversationParticipant record is created each time a participant joins a conversation. This object is available in API version 49.0 and later.

[ConvIntelligenceSignalRule](#)

Represents a conversation intelligence signal rule. The rule triggers actions based on real-time intelligence signals from your telephony system or keywords mentioned by support reps or customers. The rule contains a set of conditions (subrules) and the filter logic used to evaluate those conditions to determine whether to trigger actions. This object is available in API version 62.0 and later.

[ConvIntelligenceSignalSubRule](#)

Represents a condition (subrule) within a conversation intelligence signal rule. This object is available in API version 62.0 and later.

[ConvMessageSendRequest](#)

Represents a request to send a template-based messaging component to a series of messaging users in an enhanced messaging channel or Messaging for In-App. This object is available in API version 60.0 and later.

Standard Objects

[ConversationVendorInfo](#)

This setup object connects the partner vendor system to the Service Cloud feature. For example, for Service Cloud Voice, this object contains information about the partner telephony or Contact Center as a Service (CCaaS) partner system. For Bring Your Own Channel for Messaging this object contains information about the partner messaging system, and for Bring Your Own Channel for CCaaS, this object contains information about the CCaaS partner system. This object is available in API version 52.0 and later.

[CorsWhitelistEntry](#)

Represents an entry in the cross-origin resource sharing (CORS) allowlist. Origins included in the allowlist can request REST resources from that Salesforce org.

[Coupon](#)

A coupon associated with a promotion. This object is available in API version 54.0 and later.

[CouponCodeRedemption](#)

Tracks each coupon code redemption. This object is available in API version 58.0 and later.

[CreditMemo](#)

Represents a document that is used to reduce the amount that a buyer owes a seller under the terms of an earlier invoice. This object is available in API version 48.0 and later.

[CreditMemoAddressGroup](#)

Stores the buyer's address information, which is used to determine the amount of tax to credit to a buyer when a credit memo is issued. This object is available in API version 55.0 and later.

[CreditMemoInvApplication](#)

Represents an amount applied from a credit memo to an invoice. This object is available in API version 48.0 and later.

[CreditMemoLine](#)

Represents product, service, adjustment, or tax line items that were included in a credit memo. This object is available in API version 48.0 and later.

[Crisis](#)

Represents a major crisis event that affects an Employee in an InternalOrganizationUnit. This object is available in API version 48.0 and later. In API version 49.0 and later, this object supports reports, criteria-based sharing rules, and history tracking, plus you can exclude individual fields from custom page layouts.

[CronJobDetail](#)

Contains details about the associated scheduled job, such as the job's name and type. This object is available in API version 29.0 and later.

[CronTrigger](#)

Contains schedule information for a scheduled job. CronTrigger is similar to a cron job on UNIX systems. This object is available in API version 17.0 and later.

[CryptoProdCatgWalletGroup](#)

Specifies if CryptoWalletGroup is in the allowlist or airdrop for the ProductCategory. A custom object between ProductCategory and CryptoWalletGroup adding the CryptoWalletGroup to allowlist or airdrop. This object is available in API version 58.0 and later.

[CspTrustedSite](#)

Represents a trusted URL. For each CspTrustedSite, you can specify Content Security Policy (CSP) directives and permissions policy directives. Each CSP directive allows Lightning components, third-party APIs, and WebSocket connections to access a resource type from the trusted URL. If the Permissions-Policy HTTP header is enabled, each permissions policy directive grants the trusted URL access to a browser feature. In API version 58.0 and earlier, CspTrustedSite included only CSP directives and was referred to as CSP Trusted Sites in Salesforce Setup. Available in API version 39.0 and later.

Standard Objects

[CspViolationEventLog](#)

CSP violation events capture details about blocked resource requests from Lightning Experience pages based on your content security policy (CSP). This object is available in API version 63.0 and later.

[CurrencyType](#)

Represents the currencies used by an organization for which the multicurrency feature is enabled.

[CustExptIntTransfSetup](#)

Stores information for different data sources that are processed for customer insights. This object is available in API version 65.0 and later.

[CustomBrand](#)

Represents a custom branding and color scheme. This object is available in API version 28.0 and later.

[CustomBrandAsset](#)

Represents a branding element in a custom branding scheme. For example, a color, logo image, header image, or footer text. A CustomBrandAsset can apply to an Experience Cloud site or to an org using the Salesforce mobile app. This object is available in API version 28.0 and later.

[CustomFieldDisplayValue](#)

Stores variation details for the product attribute item view. This object is available in API version 63.0 and later.

[CustomHelpMenuItem](#)

Represents the items within a section of the Lightning Experience help menu that the admin added to display custom, org-specific help resources. This object is available in API version 44.0 and later.

[CustomHelpMenuSection](#)

Represents a section of the Lightning Experience help menu that the admin added to display custom, org-specific help resources. This object is available in API version 44.0 and later.

[CustomHTTPHeader](#)

Represents a custom HTTP header that provides context information from Salesforce such as region, org details, or the role of the person viewing the external object. This object is available in API version 43.0 and later.

[CustomMsgChannel](#)

Represents a custom conversation channel and stores event-driven Messaging settings. Custom conversation channels are implemented for Bring Your Own Channel for Messaging and Bring Your Own Channel for CCaaS Messaging channels. This object is available in API version 63.0 and later.

[CustomNotificationType](#)

Stores information about custom notification types. This object is available in API version 47.0 and later.

[CustomPermission](#)

Represents a permission created to control access to a custom process or app, such as sending email. This object is available in API version 31.0 and later.

[CustomPermissionDependency](#)

Represents the dependency between two custom permissions when one custom permission requires that you enable another custom permission. This object is available in API version 32.0 and later.

[Customer](#)

Represents the customer role of an individual with respect to a particular company or organization. This object is available in API version 53.0 and later.

[DandBCompany](#)

Represents a Dun & Bradstreet® company record, which is associated with an account added from Data.com. This object is available in API version 25.0 and later.

Standard Objects

[Dashboard](#)

Represents a dashboard, which shows data from custom reports as visual components. Access is read-only. This object is available in API version 20.0 and later.

[DashboardComponent](#)

Represents a dashboard component, which can be a chart, metric, table, or gauge on a dashboard. Access is read-only. This object is available in API version 21.0 and later.

[DashboardTag](#)

Associates a word or short phrase with a Dashboard. This object is available in API version 20.0 and later.

[DataAssessmentFieldMetric](#)

Represents summary statistics for matched, blank, and differing fields in account records of an org compared to records in Data.com. This object is available in API version 37.0 and later.

[DataAssessmentMetric](#)

Represents a summary of statistics for fields matched and unmatched in your account records with Data.com account records. This object is available in API version 37.0 and later.

[DataAssessmentValueMetric](#)

Summarizes the number of fields matched for your account records with Data.com account records. This object is available in API version 37.0 and later.

[DatabaseSaveEventLog](#)

Database Save events track when records are created, updated, or deleted. This object is available in API version 64.0 and later.

[DatacloudCompany](#)

Represents the fields for Data.com company records. This object is available in API version 30.0 or later.

[DatacloudContact](#)

The fields and properties for Data.com contact records. This object is available in API version 30.0 or later.

[DatacloudDandBCompany](#)

Represents a set of read-only fields that are used to return D&B company data from Data.com API calls. This object is available in API version 30.0 or later.

[DatacloudOwnedEntity](#)

Represents fields in the DatacloudOwnedEntity object. The DatacloudOwnedEntity object tracks user-purchased records. This object is available in API version 30.0 or later.

[DatacloudPurchaseUsage](#)

Represents an object used to identify and track Data.com record purchases. This object is available in API version 30.0 or later.

[DataDetectJobObjectSession](#)

For internal use only. This object is available in API version 63.0 and later.

[DataDetectJobSession](#)

Represents a run of a DataDetect scan policy that's triggered manually. This object is available in API version 63.0 and later.

[DataDetectJobSessSummary](#)

For internal use only. This object is available in API version 66.0 and later.

[DataDetectPolicy](#)

Represents a set of parameters that specifies the types of sensitive data for search with in a data scan. DataDetect scan policies can also apply filters to a data scan, along with specific objects and fields for scanning. This object is available in API version 60.0 and later.

Standard Objects

[DataDetectPolicyObject](#)

Represents an object of the DataDetect scan policy to be scanned. This object is available in API version 62.0 and later.

[DataDetectScanResult](#)

Represents the results of a DataDetect data policy scan. This object is available in API version 63.0 and later.

[DataDetectPolicyObjField](#)

Represents an object field of the DataDetect scan policy object to be scanned. This object is available in API version 64.0 and later.

[DataDetectPolicySnapshot](#)

For internal use only. This object is available in API version 64.0 and later.

[DataDetPlcyDataSrchExps](#)

Represents data search expressions for scanning DataDetect scan policies based on Java regex. This object is available in API version 64.0 and later.

[DataDetPlcyMdatScanCrit](#)

Represents inclusion and exclusion criteria that filter what DataDetect scan policy object fields are to be scanned based on metadata tags. This object is available in API version 64.0 and later.

[DataDetPlcySstvDataCatg](#)

Represents the sensitive data categories that the DataDetect scan policy is required to scan. This object is available in API version 64.0 and later.

[DataEncryptionKey](#)

The DataEncryptionKey object is part of the Bring Your Own Key (BYOK) feature, which allows users to upload a data encryption key (DEK) using a public key generated by the Salesforce Shield Key Management Service (KMS). Customers create their own DEKs and upload them to Salesforce. Users access this entity via the API to list DEK keys for auditing purposes. They can also programmatically use this object to create the certificate and to upload key material. This object is available in API version 63.0 and later.

[DataIntegrationRecordPurchasePermission](#)

Indicates Lightning Data purchase credits that a Salesforce admin has granted to users.

[DataKitDeployEvent](#)

Represents a data kit deployment event that notifies subscribers of the status of the data kit component deployment. This object is available in API version 61.0 or later.

[DataKitDeploymentLog](#)

Represents the log details of a data kit component deployment. This object is available in API version 61.0 or later.

[DatasetExport](#)

Represents a dataset exported from CRM Analytics. When a dataset is exported, the data is converted into a .csv file and the schema is stored in a separate JSON file. These files are stored in two objects: DatasetExport and DatasetExportPart. DatasetExport acts as the header and includes the JSON schema.

[DatasetExportPart](#)

Represents a dataset exported from CRM Analytics. When a dataset is exported, the data is converted into a .csv file and the schema is stored in a separate JSON file. These files are stored in two objects: DatasetExport and DatasetExportPart. DatasetExportPart contains parts of the .csv file.

[DataMaskCustomValueLibrary](#)

Represents a set of user-inputted values in a custom library in Data Mask. This object is available in API version 64.0 and later.

[DataStatistics](#)

For internal use only.

Standard Objects

[DataUseLegalBasis](#)

Represents the legal basis for contacting a customer, such as billing or contract. This object is available in API version 45.0 and later.

[DataUsePurpose](#)

Represents the reason for contacting a prospect or customer, such as for billing, marketing, or surveys. This object is available in API version 45.0 and later.

[DataWeaveResource](#)

Represents the DataWeaveScriptResource class that is generated for all DataWeave scripts. This object is available in API version 58.0 and later.

[DatedConversionRate](#)

Represents the dated exchange rates used by an organization for which the multicurrency and the effective dated currency features are enabled.

[DealIndirectPartner](#)

Represents an indirect partner's involvement in a deal. This object is available in API version 63.0 and later.

[DeclinedEventRelation](#)

Represents event participants (invitees or attendees) with the status `Declined` for a given event. This object is available in API versions 29.0 and later.

[DelegatedAccount](#)

Represents the external managed account. This object is available in API version 49.0 and later.

[DeleteEvent](#)

Represents a record that has been soft deleted. Search on this object was available in API version 48.0, then removed in API version 50.0.

[DeliveryEstimationSetup](#)

Shows the configuration options for the commerce delivery service offered through a web store or sales channel. Includes settings such as delivery location group, channel, fulfillment types, and default fulfillment time. This object is available in API version 61.0 and later.

[DigitalSignature](#)

Represents a signature captured on a service report in field service.

[DigitalWallet](#)

Represents a customer's digital wallet service. Salesforce Payments can use a digital wallet as a payment source when processing payments through a payment gateway. This object is available in API version 48.0 and later.

[DirectMessage](#)

Represents a direct message conversation between multiple users in Chatter. This object is available in API version 38.0 and later.

[Division](#)

A logical segment of your organization's data. For example, if your company is organized into different business units, you could create a division for each business unit, such as "North America," "Healthcare," or "Consulting." Available only if the organization has the Division permission enabled.

[DivisionLocalization](#)

When the Translation Workbench is enabled for your organization, the DivisionLocalization object provides the translation of the label for a division.

[DocAtchDownloadEventLog](#)

Document Attachment Downloads events contain details of document and attachment downloads. This object is available in API version 65.0 and later.

Standard Objects

[Document](#)

Represents a file that a user has uploaded. Unlike Attachment records, documents are not attached to a parent object.

[DocumentAttachmentMap](#)

Maps the relationship between an EmailTemplate and its attachment, which is stored as a Document.

[DocumentRecipient](#)

Connects a Service Report to a Digital Signature. This object is available in API version 55.0 and later.

[DocumentTag](#)

Associates a word or short phrase with a Document.

[Domain](#)

Read-only object that represents a custom Web address assigned to a site in your organization. This object is available in API version 26.0 and later.

[DomainSite](#)

Read-only junction object that joins the Site and Domain objects. This object is available in API version 26.0 and later.

[DsarPolicy](#)

Represents a Data Subject Access Request (DSAR) policy created in the Privacy Center managed package. DSAR policies anonymize or transfer personal data from your org at your customer's request. This object is available in API version 50.0 and later.

[DsarPolicyLog](#)

Represents the history of Data Subject Access Request (DSAR) policy execution requests. This log records the status and results of executed DSAR policies for a customer. This object is available in API version 50.0 and later.

[DuplicateJob](#)

Represents an instance of a job that identifies duplicates among existing records in the system.

[DuplicateJobDefinition](#)

Setup object defining a job that identifies duplicate record items globally.

[DuplicateJobMatchingRule](#)

Represents a MatchingRule to be used with a DuplicateJob sharing the corresponding DuplicateJobMatchingRuleDefinition.

[DuplicateJobMatchingRuleDefinition](#)

Setup object specifying a MatchingRule to use with DuplicateJob instances that share a DuplicateJobDefinition.

[DuplicateRecordItem](#)

Represents a record that's been identified as a duplicate. DuplicateRecordItems are included in a DuplicateRecordSet, which are processed in duplicate jobs. Use this object to create custom report types for duplicates.

[DuplicateRecordSet](#)

Represents a group of records that have been identified as duplicates. Each duplicate record set contains one or more duplicate record items. Use this object to create custom report types and view the results of duplicate jobs.

[DuplicateRule](#)

Represents a duplicate rule for detecting duplicate records.

[DynamicDataCapture](#)

DynamicDataCapture is a junction object that adds a Form tab to Work Order Overview, and to the related list of a work order, work order line item, or service appointment in the Field Service mobile app. This object is available in API version 62.0 and later.

[ElectronicMediaGroup](#)

Represents the type of media that you can associate with a product or category. This object is available in API version 49.0 and later.

Standard Objects

[ElectronicMediaUse](#)

Represents the usage of media. This object is available in API version 49.0 and later.

[EmailContent](#)

Represents a marketing email asset for use with Account Engagement. This object is available in API version 50.0 and later.

[EmailDomainFilter](#)

Represents a filter that determines whether an email relay is restricted to a specific list of domains. This object is available in API version 43.0 and later.

[EmailDomainKey](#)

Represents a domain key for an organization's domain, used to authenticate outbound email that Salesforce sends on the organization's behalf. This object is available in API version 28.0 and later.

[EmailInsight](#)

Represents an insight generated from an email interaction. EmailInsights acts as a central place to store various types of insights related to email messages. The insights stored include status, type, and time of generation. Only certain types of insights can be created based on a pre-configured list of insight types. This object is available in API version 63.0 and later.

[EmailInsightAction](#)

Represents the actions that have been taken, or could be taken, in relation to email insights. It logs different types of actions and associated metadata, helping to track and manage the activities and decisions made based on email insights. This object is available in API version 63.0 and later.

[EmailMessage](#)

Represents an email in Salesforce.

[EmailMessageMigration](#)

For internal use only.

[EmailMessageRelation](#)

Represents the relationship between an email and contacts, leads, and users. This object is available in API version 37.0 and later.

[EmailRelay](#)

Represents the configuration for sending an email relay. An email relay routes email sent from Salesforce through your company's email servers. This object is available in API version 43.0 and later.

[EmailRoutingAddress](#)

An email address used for Email-to-Case. Email routing addresses store a unique email services address provided by Salesforce and configuration options for emails received by this address.

[EmailServicesAddress](#)

An email service address.

[EmailServicesFunction](#)

An email service.

[EmailStatus](#)

Represents the status of email sent.

[EmailTemplate](#)

Represents a template for an email, mass email, list email, or Sales Engagement email. Supported in first-generation managed packages only.

[EmailTemplateMonthlyMetric](#)

Represents the monthly engagement metrics for an email template. This object is available in API version 53.0 and later.

Standard Objects

[EmbeddedServiceDetail](#)

Represents a metadata catalog object that exposes fields from the underlying Embedded Service setup objects defined in each EmbeddedServiceConfig deployment for guest users. Guest users don't have direct access to the Embedded Service setup objects. Available in API version 39.0 and later.

[EmbeddedServiceLabel](#)

Represents a customized label in Embedded Chat or embedded Appointment Management. This object is available in API version 44.0 and later.

[Employee](#)

Represents an employee within a company or organization. This object is available in API version 48.0 and later. In API version 49.0 and later, this object supports reports, criteria-based sharing rules, and history tracking, plus you can exclude individual fields from custom page layouts.

[Employee2](#)

Represents an employee within a company or an organization. This object is available in API version 62.0 and later.

[EmployeeCrisisAssessment](#)

Represents a crisis assessment of an Employee. This object is available in API version 48.0 and later. In API version 49.0 and later, this object supports reports, criteria-based sharing rules, and history tracking, plus you can exclude individual fields from custom page layouts.

[EmpUserProvisioningProcess](#)

Represents an employee-user provisioning process. This object is available in API version 52.0 and later.

[EmpUserProvisionProcessErr](#)

Represents an employee-user provisioning process error. This object is available in API version 52.0 and later.

[EnablementMeasureDefinition](#)

Represents an Enablement measure, which specifies the job-related activity that a user performs to complete a milestone or outcome in an Enablement program. A measure identifies a source object and optional related objects, with optional field filters and filter logic, for tracking the activity. This object also represents Enablement measure information in Metadata API. This object is available in API version 56.0 and later.

[EnablementProgram](#)

Represents an Enablement program, which includes exercises and measurable milestones to help users such as sales reps achieve specific outcomes related to your company's revenue goals. This object is available in API version 56.0 and later.

[EnablementProgramDefinition](#)

Represents Enablement program information in Metadata API. This object is available in API version 61.0 and later.

[EnblMeasureObjectDefinition](#)

Represents the criteria for an object that tracks the job-related activity for an Enablement measure in an Enablement program. A separate EnblMeasureObjectDefinition is used for a measure's source object and each optional related object. This object is available in API version 56.0 and later.

[EnblPgmTaskMeasureProgress](#)

Represents a user's progress through the object and field requirements that an Enablement measure defines for an outcome or milestone in an Enablement program. This object is available in API version 61.0 and later.

[EnblProgramSection](#)

Represents an optional section in an Enablement program. A section can include other program items, such as milestones and exercises. This object is available in API version 60.0 and later.

Standard Objects

[EnblProgramTaskDefinition](#)

Represents an outcome, a milestone, or an exercise in an Enablement program. A program task is also known as a program item. This object is available in API version 60.0 and later.

[EnblProgramTaskMeasure](#)

Represents the connection between an Enablement measure and a specific milestone or outcome in an Enablement program. This object is available in API version 61.0 and later.

[EnblProgramTaskProgress](#)

Represents a user's progress towards completing an outcome, a milestone, or an exercise in an Enablement program. This object is available in API version 60.0 and later.

[EnblProgramTaskSubCategory](#)

Represents a custom exercise type that an Enablement admin adds to an Enablement program in Program Builder. A custom exercise type also requires a corresponding EnblProgramTaskDefinition record for Program Builder and corresponding LearningItem and LearningItemType records for when users take the exercise in the Guidance Center. This object is available in API version 62.0 and later.

[EngagementChannelType](#)

Represents a channel through which a customer can be reached for communication. This object is available in API version 48.0 and later.

[EngagementSignal](#)

Represents data about an individual's engagement action, such as a web click, an email response, or a PDF download. This object is available in API version 62.0 and later.

[EngagementSignalCmpndMetric](#)

Represents a rate metric that measures the ratio between two engagement signal metrics, such as product orders and product views to calculate a conversion rate, or email clicks and email opens to determine a click-through rate. Use this object to create complex measurements for A/B testing and web experimentation. This object is available in API version 62.0 and later.

[EngagementSignalMetric](#)

Represents a measurable quantity that's derived from an engagement signal, such as the sum of revenue or a count of clicks. Use this object to track user engagement for A/B tests, machine learning model training, and attribution configurations. This object is available in API version 62.0 and later.

[EnhancedLetterhead](#)

Represents an enhanced letterhead that can be associated with a Lightning email template that doesn't use the Salesforce Merge Language (SML). This object is available in API version 46.0 and later.

[Entitlement](#)

Represents the customer support an account or contact is eligible to receive. This object is available in API version 18.0 and later. Entitlements may be based on an asset, product, or service contract.

[EntitlementContact](#)

Represents a Contact eligible to receive customer support via an Entitlement. This object is available in API version 18.0 and later.

[EntitlementTemplate](#)

Represents predefined terms of customer support for a product (Product2). This object is available in API version 18.0 and later.

[EntityHistory](#)

Represents historical information about an object's changed field values. This object is only available to users with the "View All Data" permission. This object is unavailable beginning with API version 8.0. Use the object-specific [History](#) objects instead.

Standard Objects

[EntityMilestone](#)

Represents a required step in a customer support process on a work order. The Salesforce user interface uses the term “object milestone.” This object is available in API version 37.0 and later.

[EntitySubscription](#)

Represents a subscription for a user following a record or another user. This object is available in API version 34.0 and later.

[EnvironmentHubMember](#)

Represents a member organization in the Environment Hub. This object is available in API version 29.0 and later.

[Event](#)

Represents an event in the calendar. In the user interface, event and task records are collectively referred to as activities.

[EventLogFile](#)

Represents event log files for event monitoring. The event monitoring product gathers information about your Salesforce org’s operational events, which you can use to analyze usage trends and user behavior. This object is available in API version 32.0 and later. The `Interval` and `Sequence` fields are available only in API version 37.0 and later.

[EventRelation](#)

Represents a person (a user, lead, or contact) or a resource (such as a conference room) invited to an event. This object lets you add or remove invitees from an event and use the API to manage invitees’ responses to invitations. If Shared Activities is enabled, `EventRelation` can also represent other objects that are related to an event. `EventRelation` does not support triggers, workflow, or data validation rules.

[EventBusSubscriber](#)

Represents a trigger, process, or flow that’s subscribed to a platform event or a change data capture event. Doesn’t include CometD or Pub/Sub API subscribers.

[EventRelayConfig](#)

Represents the configuration of an event relay, which relays platform events and change data capture events from Salesforce to Amazon EventBridge. This object is available in API version 56.0 and later.

[EventRelayFeedback](#)

Represents execution state information about an event relay from Salesforce to Amazon EventBridge for platform events and change data capture events. Query this object to get information such as the event relay status and any error message. This object is available in API version 56.0 and later.

[EventStagedInviteeEmail](#)

Represents the relationship between an event and an email address invited to the event that doesn’t match to a user, contact, or lead record. Data about the unmatched email address is represented in `StagedInviteeEmail`. This object represents event-related details, such as the invitee’s attendance response to the event. This object is available in API version 66.0 and later.

[EventTag](#)

Associates a word or short phrase with an Event.

[EventWhoRelation](#)

Represents the relationship between an event and a lead or contacts. This derived object is a filtered version of the [EventRelation](#) on page 2453 object; that is, `IsParent` is `true` and `IsWhat` is `false`. It doesn’t represent relationships to invitees or to accounts, opportunities, or other objects. This object is available in API versions 29.0 and later.

[Expense](#)

Represents an expense linked to a work order. Service resource technicians can log expenses, such as tools or travel costs. This object is available in API version 49.0 and later.

[ExpenseReport](#)

Represents a report that summarizes expenses. This object is available in API version 50.0 and later.

Standard Objects

[ExpenseReportEntry](#)

Represents an entry in an expense report. This object is available in API version 50.0 and later.

[ExpressionFilter](#)

Represents a logical expression that's used to control the execution of macro instructions. This object is available in API version 46.0 and later.

[ExpressionFilterCriteria](#)

Represents a condition in an expression that's used to control the execution of macro instructions. This object is available in API version 46.0 and later.

[ExpressionSetConstraintObj](#)

Represents the association between a Product object and the constraint model tags defined in a given constraint model. This object is available in API version 63.0 and later.

[ExtConvParticipantIntegDef](#)

Represents the integration configuration for external conversation participants, used for communication between Salesforce and external messaging platforms. This object is available in API version 66.0 and later.

[ExtDataShare](#)

Represents a data share, which is a collection of Data Cloud objects that can be shared with other Data Cloud orgs or third-party partners. This object is available in API version 56.0 and later.

[ExternalAccountHierarchy](#)

Represents the external account hierarchy, which works like a role-based hierarchy. Use ExternalAccountHierarchy to allow partner and customer users to share data with other external accounts in their hierarchy. This object is available in API version 49.0 and later.

[ExternalAccountHierarchyHistory](#)

Represents the history of changes to values in the fields of an external account hierarchy. This object is available in API version 50.0 and later.

[ExternalClientApplication](#)

For internal use only.

[ExternalDataSource](#)

Represents an external data source, which defines connection details for integration with data and content that are stored outside the Salesforce org. This object is available in API version 27.0 and later.

[ExternalDataUserAuth](#)

Stores authentication settings for a Salesforce user to access an external system. The external system must be defined in an external data source or a named credential that's configured to use per-user authentication. This object is available in API version 27.0 and later.

[ExternalEncryptionRootKey](#)

Represents metadata about root keys stored in third-party key stores that are used to generate and secure keys that encrypt Salesforce data. This object is available in API version 58.0 and later.

[ExternalEvent](#)

Holds native iOS or Android calendar event details for the Salesforce Today feature in the Salesforce mobile app. This object is available in API version 35.0 and later.

[ExternalEventMapping](#)

Holds native iOS or Android calendar event details for the Salesforce Today feature in the Salesforce mobile app. This object is available in API version 35.0 and later.

Standard Objects

[ExternalSocialAccount](#)

Represents a managed social media account on a social network such as Facebook or Twitter. This object is available in API version 29.0 and later.

[ExtKnowledgeConnector](#)

Represents a connector to a third-party knowledge source for Unified Knowledge. This object is available in API version 60.0 and later.

[ExtClntAppOAuthPlcyCnfg](#)

For internal use only.

[ExtClntAppOAuthSettings](#)

For internal use only.

[ExtClntAppPlcyCnfg](#)

For internal use only.

[ExtIntrldMapping](#)

Represents a mapping between a Salesforce record and its corresponding record in an external system, such as Workday. This object is available in API version 66.0 and later.

[ExtlRecShrCnct](#)

Represents authentication data to make outbound calls to and inbound calls from an external system to publish events for Partner Connect. This object is available in API version 62.0 and later.

[ExtlRecShrCnctAccnt](#)

Represents an association between an account and an external record share connection for Partner Connect. This object is available in API version 62.0 and later.

[ExtlRecShrField](#)

Represents an imported, exported, or updated external record share field for Partner Connect. This object is available in API version 63.0 and later.

[ExtlRecShrFieldMap](#)

Represents the external record share field mapping between the sender and receiver for Partner Connect. This object is available in API version 62.0 and later.

[ExtlRecShrLead](#)

Represents the Lead record of a vendor org if you're a partner. If you're a vendor for Partner Connect, this object represents a partner org. This object is available in API version 62.0 and later.

[ExtlRecShrObject](#)

Represents a shared object for Partner Connect. This object is available in API version 62.0 and later.

[ExtlRecShrOpportunity](#)

Represents the opportunity for Partner Connect in the vendor org if you're a partner and the partner org if you're the vendor. This object is available in API version 62.0 and later.

[ExtlRecShrPcklstOptn](#)

Represents a picklist option of an external record share picklist field shared between a partner and vendor for Partner Connect. This object is available in API version 62.0 and later.

[ExtlRecShrPicklistMap](#)

Represents the external record share picklist field mapping between the partner and vendor system for Partner Connect. This object is available in API version 62.0 and later.

Standard Objects

[ExtlRecShrRecordMap](#)

Represents the lead or opportunity being mapped between a partner and vendor for Partner Connect. This object is available in API version 62.0 and later.

[FeedAttachment](#)

Represents an attachment to a feed item, such as a file attachment or a link. Use FeedAttachment to add various attachments to one feed item. This object is available in API version 36.0 and later.

[FeedComment](#)

Represents a comment added to a feed by a user. This object is available in API version 18.0 and later.

[FeedItem](#)

FeedItem represents an entry in the feed, such as changes in a record feed, including text posts, link posts, and content posts. This object is available in API version 21.0 and later. This object replaces FeedPost.

[FeedLike](#)

Indicates that a user has liked a feed item. This object is available in API version 21.0 and later.

[FeedPollChoice](#)

Shows the choices for a poll posted in the feed. This object is available in API version 29.0 and later.

[FeedPollVote](#)

Shows how users voted on a poll posted in the feed. This object is available in API version 29.0 and later.

[FeedPost](#)

FeedPost represents the following types of changes in a record feed, such as AccountFeed: text posts, link posts, and content posts. This object is available in API version 18.0 through 21.0. FeedPost is no longer available in later versions. Starting with API version 21.0, use FeedItem to represent text posts, link posts, and content posts in feeds.

[FeedRevision](#)

Holds the revision history of a specific feed item or comment, including a list of attributes that changed for each revision. This object is available in API version 34.0 and later.

[feedSignal](#)

Attach feed signals, like `UpDownVote`, `UserVerified`, and `Verified`, to a feed post or comment. This object is available in API version 41.0 and later.

[FeedTrackedChange](#)

Represents an individual field change or set of field changes. A FeedTrackedChange is a child object of a record feed, such as AccountFeed. This object is available in API version 18.0 and later.

[FieldHistoryArchive](#)

Represents field history values for all objects that retain field history. `FieldHistoryArchive` is a big object, available only to users with the "Retain Field History" permission. This object is available in API version 29.0 and later.

[FieldChangeSnapshot](#)

Use this virtual object to learn which opportunities' close dates changed during the specified time period. This object is available in API version 52.0 and later.

[FieldPermissions](#)

Represents the enabled field permissions for the parent PermissionSet. This object is available in API version 24.0 and later.

[FieldSecurityClassification](#)

Represents a field's data sensitivity value selected from the SecurityClassification picklist. This object is available in API version 46.0 and later.

Standard Objects

[FieldServiceMobileSettings](#)

Represents a configuration of settings that control the Field Service iOS and Android mobile app experience. This object is available in API version 38.0 and later.

[FieldServiceOrgSettings](#)

Represents the org settings for Field Service, such as Appointment Assistant settings. If Field Service is enabled, the org contains one read-only record of this object. This object is available in API version 51.0 and later.

[FileSearchActivity](#)

Represents search activity on a file. This object is available in API version 38.0 and later.

[FiscalYearSettings](#)

Settings to define a custom or standard fiscal year for your organization. This object has a parent-child relationship with the Period object.

[FldSvcObjChg](#)

Represents a change made to one of a service appointment's tracked fields. This object is available in API version 63.0 and later.

[FldSvcObjChgDtl](#)

Represents the details of a change made to one of a service appointment's tracked fields. This object is available in API version 63.0 and later.

[FlexQueueItem](#)

Represents an asynchronous Apex job in the Apex flex queue. Provides information about the job type and flex queue position of the AsyncApexJob. This object is available in API version 36.0 and later.

[FlowDefinitionView](#)

Represents the description of a flow definition. This object is available in API version 46.0 and later.

[FlowInterview](#)

Represents a flow interview. A *flow interview* is a running instance of a flow. This object is available in API version 32.0 and later.

[FlowInterviewLog](#)

Represents the logs of a screen flow interview. An *interview* is an instance of a running or previously run flow. This object is available in API version 49.0 and later.

[FlowInterviewLogEntry](#)

Represents the log of a specific element that's executed by a screen flow interview. An *interview* is an instance of a running or previously run flow. This object is available in API version 49.0 and later.

[FlowInterviewLogOwnerSharingRule](#)

Represents the rules for sharing a FlowInterviewLog with users other than the owner. This object is available in API version 49.0 and later.

[FlowInterviewOwnerSharingRule](#)

Represents the rules for sharing a FlowInterview with users other than the owner. This object is available in API version 33.0 and later.

[FlowInterviewShare](#)

Represents a sharing entry on a FlowInterview. This object is available in API version 33.0 and later.

[FlowNavMetricEventLog](#)

Flow Navigation Metric event logs contain metric data for flow interviews such as total execution time, number of interviews, and number of errors. This object is available in API version 61.0 and later.

[FlowOrchestration](#)

Represents the details of an orchestration definition. This object is available in API version 62.0 and later.

Standard Objects

[FlowOrchestrationInstance](#)

Represents a run-time instance of an orchestration. This object is available in API version 53.0 and later.

[FlowOrchestrationLog](#)

Represents logging data for a FlowOrchestrationInstance. This object is available in API version 54.0 and later.

[FlowOrchestrationStageInstance](#)

Represents a run-time instance of a stage in a run-time instance of an orchestration. This read-only object is available in API version 53.0 and later.

[FlowOrchestrationStepInstance](#)

Represents a run-time instance of a step in a run-time instance of a stage of a run-time instance of an orchestration. This read-only object is available in API version 53.0 and later.

[FlowOrchestrationVersion](#)

Represents the version of an orchestration. This object is available in API version 62.0 and later.

[FlowOrchestrationWorkItem](#)

Represents a work item associated with a run-time instance of an interactive step in a run-time instance of an orchestration. This object is available in API version 54.0 and later.

[FlowRecord](#)

Represents the details of a flow. This object is available in API version 58.0 and later.

[FlowRecordElement](#)

Represents a single element within a flow version. This object is available in API version 58.0 and later.

[FlowRecordElementOccurrence](#)

Represents the execution metrics for a single element within a flow version. This object is available in API version 62.0 and later.

[FlowRecordRelation](#)

Represents a relationship between a record and a flow interview. When a flow interview is paused, Salesforce uses the `$Flow.CurrentRecord` global variable in the flow to associate the interview with a record. Available in API version 42.0 and later.

[FlowRecordVersion](#)

Represents the version of a flow. This object is available in API version 58.0 and later.

[FlowRecordVersionOccurrence](#)

Represents an instance of a recurring flow that runs on a schedule. For example, a flow that runs weekly on Wednesdays creates an occurrence each time it runs. This object is available in API version 60.0 and later.

[FlowTestResult](#)

Represents the results for a flow test associated with a flow version. This object is available in API version 55.0 and later.

[FlowTestView](#)

Represents the description of a flow test associated with a flow definition. This object is available in API version 55.0 and later.

[FlowStageRelation](#)

Represents a relationship between a paused flow interview and its stages. When a flow interview is paused, Salesforce creates a FlowStageRelation record for each stage that's set to the `$Flow.CurrentStage` or `$Flow.ActiveStages` global variable. Available in API version 43.0 and later.

[FlowVariableView](#)

Represents a variable within the flow version. This object is available in API version 46.0 and later.

[FlowVersionView](#)

Represents the version of a flow definition. This object is available in API version 46.0 and later.

Standard Objects

Folder

Represents a repository for a Dashboard, Document, EmailTemplate, Macro, QuickText, or Report. Only one type of item can be contained in a folder.

FolderedContentDocument

Represents the relationship between a parent and child ContentFolderItem in a ContentWorkspace.

ForecastingAdjustment

This object represents an individual forecast manager's adjustment for a subordinate's or child territory's forecast via a ForecastingItem. Available in API versions 26.0 and later. This object is different from the ForecastingOwnerAdjustment object, which represents forecast users' adjustments of their *own* forecasts, including territory forecasts they own.

ForecastingColumnDefinition

Represents a custom calculated column or a custom reference data column in a forecast type. This object is available in API version 56.0 and later.

ForecastingColumnDefinitionLocalization

Represents the translated value of a custom calculated column or custom reference data column label when the Translation Workbench is enabled for your organization. This object is available in API version 56.0 and later.

ForecastingCustomCategory

Represents a custom forecasting category used for forecast rollups. This object is available in API version 62.0 and later.

ForecastingCustomData

Represents forecast data from external sources to display in the forecasts page. For example, risk or last year's revenue. This object is available in API version 58.0 and later.

ForecastingDisplayedFamily

Represents the table in Forecasts Settings where an admin selects the product families that users can forecast on in Lightning Experience. This object is available in API version 40.0 and later.

ForecastingFact

This object is read-only and links a ForecastingItem with its opportunities, such as opportunities that share the same owner or forecast category and have a closing date within the period of the forecasting item. Available in API versions 26 and greater.

ForecastingFilter

Represents the custom filter for including or excluding data from opportunity forecasts. This object is available in API version 54.0 and later.

ForecastingFilterCondition

Represents the custom filter condition logic for including or excluding data from opportunity forecasts. This object is available in API version 54.0 and later.

ForecastingGroup

Represents groups used to roll up forecast totals on the forecasts page. For example, group forecasts by industry or sales type. This object is available in API version 60.0 and later.

ForecastingGroupItem

Represents the value within the picklist that is specified as the forecasting group for a forecast type. For example, if you have a forecasting group that identifies the industry an opportunity is part of, this object represents the value in the the industry picklist that's chosen to be part of the group. This object is available in API version 60.0 and later.

Standard Objects

[ForecastingItem](#)

This object is read-only used for individual forecast amounts. Users see amounts based on their perspectives and forecast roles. The amounts users see include one of these values when forecasting in revenue: `AmountWithoutAdjustments`, `AmountWithoutManagerAdjustment`, `ForecastAmount`, `OwnerOnlyAmount`. The amounts users see include one of these values when forecasting in quantity: `QuantityWithoutAdjustments`, `QuantityWithoutManagerAdjustment`, `ForecastQuantity`, `OwnerOnlyQuantity`. Available in API version 26.0 and later.

[ForecastingOwnerAdjustment](#)

This object represents an individual forecast user's adjustment of their *own* forecast, including territory forecasts they own, via a `ForecastingItem`. Available in API versions 33.0 and later. This object is different from the `ForecastingAdjustment` object, which represents managers' adjustments of *subordinates'* and child territories' forecasts.

[ForecastingQuota](#)

This object represents an individual user's or territory's quota for a specified time period. The `Managed Quotas` user permission is required for creating, updating, or deleting quotas. (Users can only edit their subordinates' or child territories' quotas, not their own.) The `View All Forecasts` permission is required to view any user's forecast, regardless of the forecast hierarchy. Available in API versions 25.0 and later. Forecast managers can view the forecasts of subordinates and territories below them in the forecast hierarchy.

[ForecastingShare](#)

Represents forecasts shared between a forecast manager and a user. Available in API version 44.0 and later.

[ForecastingSourceDefinition](#)

Represents the object, measure, date type, and hierarchy that a forecast uses to project sales. This object is available in API version 52.0 and later.

[ForecastingSrcRecJudgment](#)

Represents forecast managers' judgment of whether they consider an opportunity-related deal to be certain to close. This object is available in API version 59.0 and later.

[ForecastingSubmission](#)

Represents a submitted forecast. This object is available in API version 62.0 and later.

[ForecastingSubmissionItem](#)

Represents the values for each forecast category in a submitted forecast. This object is available in API version 62.0 and later.

[ForecastingType](#)

Used to identify the forecast type associated with `ForecastingAdjustment`, `ForecastingOwnerAdjustment`, `ForecastingQuota`, `ForecastingFact`, and `ForecastingItem` objects. Available in API version 30.0 and greater.

[ForecastingTypeSource](#)

Maps a forecasting source definition to a forecast type. This object is available in API version 52.0 and later.

[ForecastingUserPreference](#)

Represents the forecasting selections that a user has made, such as display options, date range, forecasting type, and currency.

[FormulaFunction](#)

Represents a function used when building a formula, including examples and uses. This object is available in API version 47.0 and later.

[FormulaFunctionAllowedType](#)

Represents the functions that are supported in the given formula context. This object is available in API version 48.0 and later.

[FormulaFunctionCategory](#)

Represents the category to which a formula belongs when building a formula. This object is available in API version 47.0 and later.

Standard Objects

[FrcstCustmCatgRampRateSrc](#)

Represents the total contract value used for custom bulk adjustments. This object is available in API version 63.0 and later.

[FrcstCustmzAdjustment](#)

Represents an individual forecast manager's adjustment of a subordinate's consumption forecast. Available in API version 63.0 and later. This object is different from the `ForecastingAdjustment` object, which represents managers' adjustments of subordinates' pipeline forecasts.

[FrcstCustmzOwnerAdjustment](#)

Represents an individual forecast user's adjustment of their own consumption forecast. Available in API version 63.0 and later. This object is different from the `ForecastingOwnerAdjustment` object, which represents users' adjustments of their pipeline forecasts.

[FulfillmentOrder](#)

Represents a group of products, fees, and delivery charges on a single order that share the same fulfillment location, delivery method, and recipient. The `FulfillmentOrderLineItem`s belonging to a `FulfillmentOrder` are associated with `OrderItemSummary` objects belonging to a single `OrderSummary`. This object is available in API version 48.0 and later.

[FulfillmentOrderItemAdjustment](#)

Represents a price adjustment on a `FulfillmentOrderLineItem`. Corresponds to an `OrderItemAdjustmentLineSummary` associated with the corresponding `OrderItemSummary`. This object is available in API version 48.0 and later.

[FulfillmentOrderItemTax](#)

Represents the tax on a `FulfillmentOrderLineItem` or `FulfillmentOrderItemAdjustment`. Corresponds to an `OrderItemTaxLineItemSummary`. This object is available in API version 48.0 and later.

[FulfillmentOrderLineItem](#)

Represents a product or delivery charge belonging to a `FulfillmentOrder`. Corresponds to an `OrderItemSummary`. This object is available in API version 48.0 and later.

[FunctionConnection](#)

Represents a connection between an org and Salesforce Functions. This object is available in API version 52.0 and later.

[FunctionInvocationRequest](#)

Represents invocation information for a Salesforce Function. This object is available in API version 51.0 and later.

[FunctionReference](#)

Represents a deployed Salesforce Function associated with an org. This object is available in API version 52.0 and later.

[GenAIConversationSummary](#)

Represents a generated summary of a voice or video call. This object is available in API version 60.0 and later.

[GenAiFunctionDefinition](#)

Represents an agent action. This object is available in API version 60.0 and later.

[GenAiPlannerDefinition](#)

Represents an agent planner service that uses a large language model (LLM) and a reasoning strategy to decompose a given task into smaller subtasks, identify the most suitable actions for each subtask, and invoke them. This object is available in API version 60.0 and later.

[GenAiPlannerFunctionDef](#)

Represents a relationship between the agent planner service and agent actions. This object is available in API version 60.0 and later.

[GenAiPluginDefinition](#)

Represents an agent topic, which is a category of actions related to a particular job to be done by AI agents. This object is available in API version 62.0 and later.

Standard Objects

[GenOpPlanRequest](#)

Represents a request to generate a service plan. This object is available in API version 67.0 and later.

[GeoCountry](#)

Represents a country. This object is available in API version 56.0 and later.

[GeolocationBasedAction](#)

Represents a geolocation-based action, which is an action that's triggered when a user enters, exits, or is within the area of the associated object. Available in API version 61.0 and later.

[GeoState](#)

Represents a state. This object is available in API version 57.0 and later.

[GtwyProvPaymentMethodType](#)

The gateway provider payment method type allows integrators and payment providers to choose an active payment to receive an order's payment data rather than allowing the Salesforce Order Management platform to select a default payment method. This object is available in API version 50.0 and later.

[Goal](#)

The Goal object represents the components of a goal such as its name, description, and status.

[GoalLink](#)

Represents the relationship between two goals. This is a many-to-many relationship, meaning that each goal can link to many other goals.

[GoogleDoc](#)

Represents a link to a Google Document. This object is available in API version 14.0 and later.

[Group](#)

A set of User records.

[GroupMember](#)

Represents a User or Group that is a member of a public group.

[GroupMembershipEventLog](#)

Group Membership events capture details about changes to public group and queue membership, such as when members are added to or removed from the public group or queue. This object is available in API version 64.0 and later.

[GuestBuyerProfile](#)

Represents a store's guest buyer profile, which allows unauthenticated buyers to browse the store. This object is available in API version 51.0 and later.

[HashtagDefinition](#)

HashtagDefinition represents hashtag (#) topics in public Chatter posts and comments. Public posts and comments include those on profiles and in public groups, but not those on records or in private groups. This object is available in API version 26.0 and later.

[HealthCareDiagnosis](#)

Represents information related to industry-standard healthcare diagnosis codes. Before the Spring '21 release, the Healthcare Procedure and Healthcare Diagnosis objects stored codes specifically related to procedures and diagnoses. These codes were used for prior-authorization requests and approval processes. Since the Spring'21 release, Health Cloud uses the Code Set and Code Set Bundle objects for this purpose instead.

[HealthCareProcedure](#)

Represents information related to industry-standard healthcare procedure codes. Before the Spring '21 release, the Healthcare Procedure and Healthcare Diagnosis objects stored codes specifically related to procedures and diagnoses. These codes were used for prior-authorization requests and approval processes. Since the Spring'21 release, Health Cloud uses the Code Set and Code Set Bundle objects for this purpose instead.

Standard Objects

[Holiday](#)

Represents a period of time during which your customer support team is unavailable. Business hours and escalation rules associated with business hours are suspended during any holidays with which they are affiliated.

[IconDefinition](#)

Represents the icon-related metadata for a custom tab. This object is available in API version 43.0 and later.

[Idea](#)

Represents an idea on which users are allowed to comment and vote, for example, a suggestion for an enhancement to an existing product or process. This object is available in API version 12 and later.

[IdeaComment](#)

Represents a comment that a user has submitted in response to an idea.

[IdeaReputation](#)

Represents a collection of statistics and scores derived from a user's activity within an Ideas zone or internal organization. This object is available in API version 28.0 and later.

[IdeaReputationLevel](#)

Represents a reputation level within an Ideas zone or internal organization and is used by the system to calculate reputation. You can create up to 25 levels per zone or internal organization. This object is available in API version 28.0 and later.

[IdeaTheme](#)

Represents an invitation to zone members to submit ideas that are focused on a specific topic. This object is available in API version 26 and later.

[IdpEventLog](#)

Represents the Identity Provider Event Log. This log records both problems and successes with inbound SAML or OpenID Connect authentication requests from another app provider. It also records outbound SAML responses when Salesforce is acting as an identity provider. This object is available in API version 39.0 and later.

[IframeWhiteListUrl](#)

Represents a list of trusted external domains that you allow to frame your Embedded Service, Surveys, and Visualforce pages. This object is available in API version 45.0 and later.

[Image](#)

Represents the details of an image. This object is available in API version 47.0 and later.

[Incident](#)

An Incident is any unplanned business interruption that has wide-sweeping impacts and requires an urgent fix. This object contains the details of the incident, documenting the history of the incident from registration to closure. This object is available in API version 53.0 and later.

[IncidentRelatedItem](#)

Represents a junction object that relates an Incident to an Asset or Product. This object is available in API version 53.0 and later.

[Individual](#)

Represents a customer's data privacy and protection preferences. Data privacy records based on the Individual object store your customers' preferences. Data privacy records are associated with related leads, contacts, person accounts, and users. This object is available in API version 42.0 and later.

[IndividualApplicationItem](#)

Captures individual application input data that is used during run-time. This object is available in API version 58.0 and later.

[IndividualHistory](#)

Represents the history of changes to values in the fields of a data privacy record, based on the Individual object. This object is available in versions 42.0 and later.

Standard Objects

[IndividualShare](#)

Represents a list of access levels to a data privacy record along with an explanation of the access level. For example, if you have access to a record because you own it, the `IndividualAccessLevel` is `All` and `RowCause` is `Owner`. This object is available in API version 42.0 and later.

[InsufficientAccessEventLog](#)

Insufficient Access event logs contain details about errors relating to insufficient account, case, contact, and opportunity record access. This object is available in API version 61.0 and later.

[InternalOrganizationUnit](#)

Represents an organization that an Employee belongs to. This object is available in API version 48.0 and later. In API version 49.0 and later, this object supports reports, criteria-based sharing rules, and history tracking, plus you can exclude individual fields from custom page layouts.

[InventoryItemReservation](#)

Used to store inventory item reservation information for a specific product and location. This object is available in API version 60.0 and later.

[InventoryReservation](#)

Stores information about the status of cart inventory reservations in B2B and D2C Commerce. This object is available in API version 60.0 and later.

[InvocableActionEventLog](#)

Invocable Action events capture the calls to Salesforce Invocable Actions. This is particularly useful to monitor actions invoked during Agentforce flows. This object is available in API version 64.0 and later.

[Invoice](#)

Represents a financial document describing the total amount a buyer must pay for goods or services provided. This object is available in API version 48.0 and later.

[InvoiceAddressGroup](#)

Stores the buyer's address information. This object is available in API version 50.0 and later.

[InvoiceBatchRun](#)

Represents a batch processing job in Subscription Management or Billing (Revenue Cloud). During an invoice batch run, all billing schedules that meet the specified criteria are processed, resulting in the generation of invoices. This object is available in API version 55.0 and later.

[InvoiceBatchRunCriteria](#)

Represents a batch processing job and its required criteria in Subscription Management. During an invoice batch run, all billing schedules that meet the specified criteria are processed, resulting in the generation of invoices. This object is available in API version 55.0 and later.

[InvoiceBatchRunRecovery](#)

Provides information about an invoice batch run recovery procedure. This object is available in API version 57.0 and later.

[InvoiceDocument](#)

Tracks and displays the status of documents generated for invoices. Invoice documents are available in the related lists of invoice entity records. This object is available in API version 61.0 and later.

[InvoiceLine](#)

Represents the amount that a buyer must pay for a product, service, or fee. Invoice lines are created based on the amount of an order line. This object is available in API version 48.0 and later.

[JobProfile](#)

Represents a job profile used for shift scheduling. This object is available in API versions 47.0 and later.

Standard Objects

[JobProfileQueueGroup](#)

JobProfileQueueGroup defines the mapping between Queue and JobProfile and configurations for capacity plans in Workforce Engagement. This object is available in API version 53.0 and later.

[Knowledge__Feed](#)

Represents the feed for a knowledge article. This object is available in API version 39.0 and later.

[Knowledge__ka](#)

Provides access to the concrete object that represents a Knowledge article, the parent object for article versions. This object is available in API version 39.0 and later.

[Knowledge__kav](#)

Provides access to the concrete object that represents a Knowledge article version. This object is available in API version 39.0 and later.

[Knowledge__DataCategorySelection](#)

Represents a data category that classifies an article. This object is available in API version 39.0 and later.

[KnowledgeableUser](#)

Represents a user identified as knowledgeable about a specific topic, and ranks them relative to other knowledgeable users. This object is available in API version 31.0 and later.

[KnowledgeArticle](#)

Provides read-only access to an article and the ability to delete the primary article. This object is available in API version 19.0 and later.

[KnowledgeArticleEventLog](#)

Knowledge Article View event logs contain user activity with your knowledge base. This object is available in API version 61.0 and later.

[KnowledgeArticleFeedback](#)

Represents information about feedback from users on Knowledge articles and details about assignment of feedback to the article owner or team to take action. This object is available in API version 64.0 and later.

[KnowledgeArticleVersion](#)

Provides a global view of standard article fields across all types of articles depending on their version. This object is available in API version 18.0 and later.

[KnowledgeArticleVersionHistory](#)

Enables read-only access to the full history of an article. This object is available in API version 25.0 and later.

[KnowledgeArticleViewStat](#)

Provides certain statistics related to the number of views for the specified article across all article types. The view count statistics are for published and archived articles only. View counts for draft articles aren't tracked. This object is read-only and available in API version 20.0 and later.

[KnowledgeArticleVoteStat](#)

Provides the weighted rating for the specified article on a scale of 1 to 5 across all article types. This object is read-only and available in API version 20.0 and later.

[LandingPage](#)

Represents an Account Engagement landing page. A landing page is a web page that a visitor reaches after clicking a link or advertisement. Landing pages can be created in Account Engagement and synced to Salesforce or created on the Landing Page object in Account Engagement Lightning App. This object is available in API version 42.0 and later.

[Lead](#)

Represents a prospect or lead.

Standard Objects

[LeadCleanInfo](#)

Stores the metadata Data.com Clean uses to determine a lead record's clean status. Helps you automate the cleaning or related processing of lead records.

[LeadDailyMetric](#)

Represents the daily engagement metrics for a lead. This object is available in API version 52.0 and later.

[LeadMonthlyMetric](#)

Represents the monthly engagement metrics for a lead. This object is available in API version 52.0 and later.

[LeadOwnerSharingRule](#)

Represents the rules for sharing a lead with users other than the owner.

[LeadShare](#)

Represents a sharing entry on a Lead.

[LeadStatus](#)

Represents the status of a Lead record, such as Open, Qualified, or Converted.

[LeadTag](#)

Associates a word or short phrase with a Lead.

[LearningContent](#)

Represents a Trailhead or enablement site (myTrailhead) module assigned to a user in Workforce Engagement or Learning Paths. This object also represents a Trailhead module or video in an Enablement program exercise. This object is available in API version 54.0 and later.

[LearningItem](#)

Represents an item that requires users to take action, including a Learning Paths entry, an Enablement program, or an exercise with linked content in an Enablement program. For Learning Paths, users are assigned a learning item to complete. For Enablement programs and exercises, users are assigned a program or can self-enroll in shared programs. This object is available in API version 58.0 and later.

[LearningItemAssignment](#)

Represents the assignment of a Learning Paths entry to users or groups or the enrollment of an Enablement program for a specific user. This object is available in API version 58.0 and later.

[LearningItemProgress](#)

Represents the progress that a user has made towards completing an assigned learning item, such as a Learning Paths entry or Enablement program. This object is available in API version 60.0 and later.

[LearningItemSubmission](#)

Represents a link to a resource, such as a video recording, that a user submits as part of a Feedback Request exercise in an Enablement program. For peer and manager feedback, this resource can be a recording of a user's sales pitch. For Einstein Coach feedback, this resource can be a video call, and Einstein generates feedback from the call's transcription. This object is available in API version 59.0 and later, but Einstein Coach is available only in API version 61.0 and later.

[LearningItemType](#)

Represents a custom exercise type that an Enablement user takes in an Enablement program in the Guidance Center. A custom exercise type also requires a corresponding LearningItem record for the Guidance Center and corresponding EnblProgramTaskDefinition and EnblProgramTaskSubCategory records for when admins create a program in Program Builder. This object is available in API version 62.0 and later.

Standard Objects

[LearningPractice](#)

Represents a Feedback Request exercise in an Enablement program. Users can submit a sample of their work and request feedback from their peers and managers. Or, users can submit a video call and Einstein Coach generates feedback from the call's transcription. This object is available in API version 59.0 and later, but Einstein Coach feedback is available only in API version 61.0 and later.

[LegalEntity](#)

Represents the way an organization is structured. An organization can be a single legal entity or it can comprise more than one legal entity. This object is available in API version 48.0 and later.

[LicenseDefinitionCustomPermission \(Developer Preview\)](#)

Represents a licensed custom permission that controls access to a license's features when included in a custom permission set license definition. This object is available in API version 54.0 and later.

[LightningErrorEventLog](#)

Lightning Error events represent errors that occurred during user interactions with Lightning Experience and the Salesforce mobile app. This object is available in API version 64.0 and later.

[LightningExperienceTheme](#)

Represents information for a theme in Lightning Experience. This object is available in API Version 42.0 and later.

[LightningLoggerEventLog](#)

Lightning Logger Event Log provides information from observed Lightning component logs. This object is available in API version 61.0 and later.

[LightningOnboardingConfig](#)

Represents the feedback provided when users switch from Lightning Experience to Salesforce Classic. Admins can customize the question, how frequently the form appears, and where the feedback is stored in Chatter from the Adoption Assistance page in Lightning Experience Setup. Available in API version 47.0 and later.

[LightningPageViewEventLog](#)

Lightning Page View event logs represent information about the page on which the event occurred in Lightning Experience and the Salesforce mobile app. A Lightning Page View event log tracks the page a user visited, how long the user spent on the page, and the load time for the page. This object is available in API version 61.0 and later.

[LightningPrfmEventLog](#)

Lightning Performance events track trends in Lightning Experience and Salesforce mobile app performance. This object is available in API version 65.0 and later.

[LightningToggleMetrics](#)

Represents users who switched from Lightning Experience back to Salesforce Classic. This object is available in API version 43.0 and later.

[LightningUsageByAppTypeMetrics](#)

Represents number of users on Lightning Experience and Salesforce Mobile. This object is available in API version 43.0 and later.

[LightningUsageByBrowserMetrics](#)

Represents Lightning Experience usage grouped by user's browser. This object is available in API version 43.0 and later.

[LightningUsageByPageMetrics](#)

Represents standard pages users viewed most frequently in Lightning Experience. This object is available in API version 43.0 and later.

[LightningUsageByFlexiPageMetrics](#)

Represents custom pages users viewed most frequently in Lightning Experience. This object is available in API version 43.0 and later.

Standard Objects

[LightningExitByPageMetrics](#)

Represents frequency metrics about the standard pages within which users switched from Lightning Experience to Salesforce Classic. This object is available in API version 44.0 and later.

[LinkedArticle](#)

Represents a knowledge article that is attached to a work order, work order line item, or work type. This object is available in API version 37.0 and later.

[LinkedArticleFeed](#)

Represents the comment feed on a linked article. This object is available in API version 39.0 and later.

[LinkedArticleHistory](#)

Represents the history of changes made to tracked fields on a linked article. This object is available in API version 37.0 and later.

[ListEmail](#)

Represents a list email sent from Salesforce, or sent from Account Engagement and synced to Salesforce. When the list email is sent, the recipients are generated by combining recipients in ListEmailIndividualRecipients and ListEmailRecipientSource. Duplicate and other invalid recipients are removed. The result is the recipients sent any given list email. ListEmail has a one-to-many relationship with ListEmailRecipientSource and ListEmailIndividualRecipient. This object is available in API version 41.0 and later.

[ListEmailIndividualRecipient](#)

For a list email in Salesforce, represents a recipient. Each record represents a link from a list email to exactly one recipient for that list email. Recipients can be contacts, leads, or campaign members. Has a one-to-many relationship with ListEmail. This object is available in API version 44.0 and later.

[ListEmailSentResult](#)

Represents the results of a list email sent from Salesforce, or sent from Account Engagement and synced to Salesforce. It contains transport headers and information specific to the associated send action. This object is available in API version 67.0 and later.

[ListEmailMonthlyMetric](#)

Represents the monthly engagement metrics for a single list email. This object is available in API version 49.0 and later.

[ListEmailRecipientSource](#)

For a list email in Salesforce, represents the dynamically defined sources of recipient email addresses. Each record represents a link to a single list view or campaign that is examined when the list email is sent. Has a one-to-many relationship with ListEmail. This object is available in API version 41.0 and later.

[ListView](#)

Represents a list view. A list view shows a set of records for an object, based on specific criteria. This object is available in API version 32.0 and later.

[ListViewChart](#)

Represents a graphical chart that's displayed on Salesforce for Android, iOS, and mobile web list views. The chart aggregates data that is filtered based on the list view that's currently displayed. This object is available in API version 33.0 and later and is accessible by portal users.

[ListViewChartInstance](#)

Retrieves metadata for all standard and custom charts for a given entity in context of a given list view. This object is available in API versions 34.0 and later.

[LiveAgentSession](#)

This object is automatically created for each Chat session and stores information about the session. This object is available in API versions 28.0 and later.

Standard Objects

[LiveAgentSessionHistory](#)

This object is automatically created for each Chat session and stores information about changes made to the session. This object is available in API versions 28.0 and later.

[LiveAgentSessionShare](#)

This object is automatically created for each Chat session and stores information about the session. This object is available in API versions 28.0 and later.

[LiveChatBlockingRule](#)

Represents a rule for blocking chat visitors' IP addresses from starting new chats with agents. This object is available in API version 34.0 and later.

[LiveChatObjectAccessConfig](#)

Represents the action you can perform on a specified object by the Chat API. This object is available in API version 53.0 and later.

[LiveChatObjectAccessDefinition](#)

Represents the parent record for one or more LiveChatObjectAccessConfig objects. This object is available in API version 53.0 and later.

[LiveChatButton](#)

Represents a button that allows visitors to request chats with Chat users. This object is available in API version 24.0 and later.

[LiveChatButtonDeployment](#)

Associates an automated chat invitation with a specific deployment. This object is available in API versions 28.0 and later.

[LiveChatButtonSkill](#)

Represents all the skills available to a LiveChatButton except the one currently assigned. To retrieve the skill currently assigned, query LiveChatButton. This object is available in API version 25.0 and later.

[LiveChatDeployment](#)

Represents the general settings for deploying Live Agent on a website. This object is available in API version 24.0 and later.

[LiveChatSensitiveDataRule](#)

Represents a rule for masking or deleting data of a specified pattern. Written as a regular expression (regex). This object is available in API version 35.0 and later.

[LiveChatTranscript](#)

This object is automatically created for each Live Agent chat session and stores information about the session. This object is available in API version 24.0 and later.

[LiveChatTranscriptEvent](#)

Captures specific events that occur over the lifetime of a chat. This object is available in API version 24.0 and later.

[LiveChatTranscriptShare](#)

Represents a sharing entry on a LiveChatTranscript object. This object is available in API version 24.0 and later.

[LiveChatTranscriptSkill](#)

Represents a join between LiveChatTranscript and Skill. This object is available in API version 25.0 and later.

[LiveChatUserConfig](#)

Represents a setting that controls the console settings for Chat users. This object is available in API version 24.0 and later.

[LiveChatUserConfigProfile](#)

Represents a join between LiveChatUserConfig and Profile. This object is available in API version 24.0 and later.

[LiveChatUserConfigUser](#)

Represents a join between Live Chat User Config and User. This object is available in API version 24.0 and later.

Standard Objects

[LiveChatVisitor](#)

Represents a website visitor who has started or tried to start a chat session. This object is available in API version 24.0 and later.

[Location](#)

Represents a warehouse, service vehicle, work site, or other element of the region where your team performs field service work. In API version 49.0 and later, you can associate activities with specific locations. Activities, such as the tasks and events related to a location, appear in the activities timeline when you view the location detail page. Also in API version 49.0 and later, Work.com users can view Employees as a related list on Location records. In API version 51.0 and later, this object is available for Omnichannel Inventory and represents physical locations where inventory is available for fulfilling orders.

[LocationGroup](#)

Represents a group of Omnichannel Inventory locations, providing an aggregate view of inventory availability across those locations. Omnichannel Inventory can create an inventory reservation for an order at the location group level, then assign the reservation to one or more locations in the group as needed. This object is available in API version 51.0 and later.

[LocationGroupAssignment](#)

Represents the assignment of a location to a location group. This object is available in API version 51.0 and later.

[LocationShippingCarrierMethod](#)

The available shipping carrier services associated with a location or location group. Allows the assignment of different shipping methods to a specific location and enables flexibility and customization in the shipping process. This object is available in API version 61.0 and later.

[LocationTrustMeasure](#)

Represents the COVID safety protocols that your business follows. For example, enforcement of masks, social distancing, cleanliness, and capacity limits. This object is available in API version 50.0 and later.

[LocWaitlistMsgTemplate](#)

Represents a junction object connecting LocationWaitlist to MessagingTemplate. This object is available in API version 50.0 and later.

[LocationWaitlist](#)

Represents a queue created for a specific location. Multiple queues can be created for a single location. For example, you can have a queue for each sales agent or a standard queue and a queue for vulnerable groups. The specific party of people in a queue is represented by LocationWaitlistedParty. This object is available in API version 50.0 and later.

[LocationWaitlistedParty](#)

Represents a specific party of people waiting in a queue. This object is available in API version 50.0 and later.

[LoginAsEventLog](#)

LoginAsEventLog contains details about when a user logs in as another user in your org. This object is available in API version 61.0 and later.

[LoginEvent](#)

The documentation has moved to [LoginEvent](#) in the *Platform Events Developer Guide*.

[LoginEventLog](#)

Login event logs contain details about your Salesforce org's user login history. This object is available in API version 61.0 and later.

[LoginGeo](#)

Represents the geographic location of the user's IP address for a login event. Due to the nature of geolocation technology, the accuracy of geolocation fields (for example, country, city, postal code) may vary. This object is available in API version 34.0 and later.

[LoginHistory](#)

Represents the login history for all successful and failed login attempts for organizations and enabled portals. This object is available in API version 21.0 and later.

Standard Objects

[LoginIp](#)

Represents a validated IP address. This object is available in version 28.0 and later.

[LogoutEventLog](#)

Contains details of user sessions ending or being revoked. This object is available in API version 65.0 and later.

[LogoutEventStream](#)

The documentation has moved to [LogoutEventStream](#) in the *Platform Events Developer Guide*.

[LookedUpFromActivity](#)

This read-only object is displayed as a related list on an activity record (an event or a task); the list contains records that have custom lookup relationships from the activity to another object. This object is not queryable.

[Macro](#)

Represents a macro, which is a set of instructions that tells the system to perform one or more tasks. This object is available in API version 32.0 and later.

[MacroInstruction](#)

Represents an instruction in a macro. An instruction can specify the object that the macro interacts with, the context or publisher that the macro works within, the operation or action that the macro performs, and the target of the macro's actions.

[MacroUsage](#)

Represents macro usage on a record, including which macro was used, who used it, and how they used it. This object is available in API version 47.0 and later.

[MailmergeTemplate](#)

Represents a mail merge template (a Microsoft Word document) used for performing mail merges for your organization.

[MaintenanceAsset](#)

Represents an asset covered by a maintenance plan in field service. Assets can be associated with multiple maintenance plans.

[MaintenancePlan](#)

Represents a preventive maintenance schedule for one or more assets in field service.

[MaintenanceWorkRule](#)

Represents the recurrence pattern for a maintenance record. This object is available in API version 49.0 and later.

[ManagedContent](#)

Represents managed content in a Salesforce CMS workspace for use in an Experience Cloud site or a channel. The ManagedContent object represents the complete instance of a managed content record. It provides a consistent identifier for the managed content so that variants of the content item can be created over time. This object is available in API version 56.0 and later.

[ManagedContentChannel](#)

Represents the details of a CMS channel. CMS channels correspond to managed content publishing endpoints. They deliver published content from your Salesforce CMS workspaces to an audience. This object is available in API version 55.0 and later.

[ManagedContentInfo](#)

Allows the creation of relationship to Product using ProductMedia. This object is available in API version 49.0 to 57.0. In API version 58.0 and later, use the ManagedContent object.

[ManagedContentSpace](#)

Represents the complete instance of a Salesforce CMS workspace that stores managed content. Users and groups with designated permissions can access and manage the content in a CMS workspace. This object is available in API version 56.0 and later.

[ManagedContentVariant](#)

Represents a variant of a managed content item. This object is available in API version 56.0 and later.

Standard Objects

[MarketingForm](#)

Represents an Account Engagement marketing form that has been synced to Salesforce. Use forms on your website and landing pages to collect information about visitors and turn anonymous visitors into identified prospects. This object is available in API version 42.0 and later.

[MarketingLink](#)

Represents an Account Engagement marketing link record, either a custom redirect or a file, that has been synced to Salesforce. This object is available in API version 42.0 and later.

[MatchingRule](#)

Represents a matching rule that is used to identify duplicate records. This object is available in API version 33.0 and later.

[MatchingRuleItem](#)

Represents criteria used by a matching rule to identify duplicate records. This object is available in API version 33.0 and later.

[MerchAccPaymentMethodSet](#)

Defines an ordered list of payment methods that are available to a merchant's customer during checkout. You can configure multiple payment method sets, each designated for a specific locale, payment region, or sale channel. This object is available in API version 58.0 and later.

[MerchAccPaymentMethodType](#)

Refers to a payment method that is in a payment method set, which is defined by the `MerchAccPaymentMethodSet` object. This object is available in API version 58.0 and later.

[MerchantAccount](#)

A type of bank account that lets a merchant accept payments from a variety of payment methods, including credit or debit cards, or digital wallets. A Salesforce Payments merchant account is linked to an underlying payment gateway to process payments. This object is available in API version 56.0 and later.

[MerchantAccountEvent](#)

Represents a merchant account platform event. Subscribe to these events so you can listen and respond to them when they're published. For example, create a Salesforce Flow that is triggered when one of these events is published. This object is available in API version 59.0 and later.

[MessagingChannel](#)

Represents a communication channel that an end user can use to send a message to an agent. A communication channel can be an SMS number, a Facebook page, or another supported messaging channel. This object is available in API version 40.0 and later.

[MessagingChannelSkill](#)

Junction object that represents an association between `MessagingChannel` and `Skill`. This object is available in API version 45.0 and later.

[MessagingChannelUsage](#)

Represents the status of an enhanced Messaging channel or of an application in a Unified Messaging channel. This object is available in API version 60.0 and later.

[MessagingConfiguration](#)

Represents the details for a Messaging configuration. This object is available in API version 47.0 and later.

[MessagingDeliveryError](#)

Represents a log of triggered outbound failures to verify when a triggered outbound has failed. This object is available in API version 44.0 and later.

[MessagingEndUser](#)

Represents a single address—such as a phone number or Facebook page—communicating with a single Messaging channel. This object is available in API version 40.0 and later.

Standard Objects

[MessagingLink](#)

Represents the link between a Messaging Channel and where it's shared. This object is available in API version 47.0 and later.

[MessagingSession](#)

Represents a session on a Messaging channel. This object is available in API version 47.0 and later.

[MessagingSessionMetrics](#)

Represents a metric gathered about a specific enhanced messaging session, such as average agent response time. This object is available starting in October 2024 in API version 62.0 and later.

[MessagingTemplate](#)

Represents a Messaging template used to send pre-formatted messages. This object is available in API version 47.0 and later.

[MetadataApiOpEventLog](#)

MetadataApiOpEventLog stores details of Metadata API retrieval and deployment requests. This object is available in API version 62.0 and later.

[MetadataPackage](#)

Represents a package that has been developed in the org you're logged in to. Applies to unlocked, unmanaged, first-generation, and second-generation managed packages.

[MetadataPackageVersion](#)

Represents a package version (managed or unmanaged) that has been uploaded from the org you're logged in to.

[Metric](#)

The Metric object represents the components of a goal metric such as its name, metric type, and current value.

[MetricDataLink](#)

The link between the metric and the data source, such as a report.

[MigratedEmail](#)

For internal use only.

[MilestoneType](#)

Represents a milestone (required step in a customer support process). This object is available in API version 18.0 and later.

[MktJourneyDcsnSetup](#)

Represents a collection of Marketing Cloud Engagement journeys that you can interact with by using Salesforce Flow in Marketing Cloud. This object is available in API version 65.0 and later.

[MLField](#)

Represents a single field in a data definition. This object is available in API version 50.0 and later.

[MLIntentUtteranceSuggestion](#)

Represents a customer input, used for training purposes in the feedback loop process of a conversation. Admins can add these inputs to the intent training model. This object is available in API version 51.0 and later.

[MLPredictionDefinition](#)

Represents a prediction definition that specifies details about the prediction. This object is available in API version 50.0 and later.

[MLModel](#)

Represents an AI model that can be used in Einstein Prediction Builder, Einstein Recommendation Builder, and other Einstein features. This object is available in API version 53.0 and later.

[MLModelFactor](#)

Represents a field value that has a positive or negative effect on the model's score. This object is available in API version 53.0 and later.

Standard Objects

[MLModelFactorComponent](#)

Represents information about the related MLModelFactor. For example, this object can represent a field value or a field range such as "Title = CEO" or "Annual Revenue >10000000". This object is available in API version 53.0 and later.

[MLModelMetric](#)

Represents a metric or statistic about the related model, such as accuracy, precision, or RSquared. Use a model's metrics to learn about its performance and to compare it with other models. This object is available in API version 53.0 and later.

[MLRecommendationDefinition](#)

For internal use only.

[MobileDeviceAppRegistration](#)

Represents the details provided in a mobile device registration event from an app that uses the Engagement Mobile SDK. This object is available in API version 65.0 and later.

[MobileSecurityAssignment](#)

Represents the assignment of mobile security policies to a profile. The policies apply to the Salesforce mobile app with Enhanced Mobile App Security enabled. This object is available in API version 54.0 and later.

[MobileSecurityPolicy](#)

Enables mobile security policies on the Salesforce mobile app with Enhanced Mobile Security. This object is available in API version 50.0 and later.

[MobileSecurityUserMetric](#)

Represents the metrics for users who have Enhanced Mobile Security policies enforced. This object is available in API version 51.0 and later.

[MobileSettingsAssignment](#)

Represents the assignment of a particular field service mobile settings configuration to a user profile. This object is available in API version 41.0 and later.

[MobSecurityCertPinConfig](#)

Configuration of mobile security certificate pinning on the Salesforce mobile app with Enhanced Mobile Security. This object is available in API version 53.0 and later.

[MobSecurityCertPinEvent](#)

The event of mobile security certificate pinning on the Salesforce mobile app with Enhanced Mobile Security. This object is available in API version 53.0 and later.

[MsgChannelLanguageKeyword](#)

Represents the consent configuration for a Messaging channel. This object is available in API version 48.0 and later.

[MsgChannelUsageExternalOrg](#)

Represents the Enterprise ID (EID) and Business Unit (MID) for Marketing Cloud connections in a Unified Messaging channel. This object is available in API version 60.0 and later.

[MyDomainDiscoverableLogin](#)

Represents configuration settings when the My Domain login page type is Discovery. Login Discovery provides an identity-first login experience, where the login page contains the identifier field only. Based on the identifier entered, a handler determines how to authenticate the user. This object is available in API version 45.0 and later.

[MutingPermissionSet](#)

Represents a set of disabled permissions and is used in conjunction with PermissionSetGroup. This object is available in API version 46.0 and later.

[Name](#)

Non-queryable object that provides information about foreign key traversals when the foreign key has more than one parent.

[NamedCredential](#)

Represents a named credential, which specifies the URL of a callout endpoint and its required authentication parameters in one definition. A named credential can be specified as an endpoint to simplify the setup of authenticated callouts. This object is available in API version 33.0 and later.

[NamedCredentialEventLog](#)

The Named Credential event type captures information about Apex callouts that use named credentials as their endpoints. Use this event type to audit the installed managed packages that use named credentials. If you don't recognize the package namespace in the named credential event log file, then you can investigate whether a security breach has occurred. This object is available in API version 65.0 and later.

[NamespaceRegistry](#)

Represents a namespace that you can link to scratch orgs that were created from your org's Dev Hub. You use the namespace when developing, packaging, and releasing an app. You can't create this object with the API. Use the **Link Namespace** action in the Dev Hub graphical interface to insert a `NamespaceRegistry` record. This object is available in API version 41.0 and later.

[NavigationLinkSet](#)

Represents the navigation menu in an Experience Cloud site. A navigation menu consists of items that users can click to go to other parts of the site. This object is available in API version 35.0 and later.

[NavigationMenuItem](#)

Represents a single menu item in a `NavigationLinkSet`. Use this object to create, delete, or update menu items in your Experience Cloud site's navigation menu. This object is available in API version 35.0 and later.

[NavigationMenuItemLocalization](#)

Represents the translated value of a navigation menu item in an Experience Cloud site. This object is available in API version 36.0 and later.

[Network](#)

Represents an Experience Cloud site. Salesforce Experience Cloud lets you create branded spaces for your employees, customers, and partners. You can customize and create experiences, whether they're communities, sites, or portals, to meet your business needs, then transition seamlessly between them. Experience Cloud sites let you share information, records, and files with coworkers and stakeholders all in one place. This object is available in API version 26.0 and later.

[NetworkActivityAudit](#)

Represents an audit trail of moderation actions in Experience Cloud sites. This object is available in API version 30.0 and later.

[NetworkAffinity](#)

Represents a junction object that associates a user profile with a `Network` object, that is, with an Experience Cloud site. Use `NetworkAffinity` to assign a default Experience Cloud site to a user profile. This object is available in API version 41.0 and later.

[NetworkAuthApiSettings](#)

Represents the settings that control enablement, access, and security for the Headless Registration Flow, Headless Forgot Password Flow, Headless Passwordless Login Flow, and their associated APIs. This object is available in API version 58.0 and later.

[NetworkDataCategory](#)

Represents data categories in Lightning Web Runtime (LWR) Experience Cloud Sites. This object is available in API version 59.0 and later.

[NetworkDiscoverableLogin](#)

Represents the Login Discoverable page from where customers and partners log in to an Experience Cloud site. Customers and partners are users with an External Identity license or any communities license for Experience Cloud. This object is available in API version 44.0 and later.

Standard Objects

[NetworkEmailTplAllowlist](#)

Represents an allowlist for the one-time password (OTP) email templates that are sent to end users during the Headless Registration Flow, the Headless Passwordless Login Flow, and the Headless Forgot Password Flow. This object is available in API version 60.0 and later.

[NetworkFeedResponseMetric](#)

Represents an object that stores the date and time values of question posts. It captures information for question creation, answer creation, and when an answer is marked as best answer. This object is available in API version 51.0 and later.

[NetworkMember](#)

Represents a member of an Experience Cloud site. Members can be either users in your company or external users with portal profiles. This object is available in API version 26.0 and later.

[NetworkMemberGroup](#)

Represents a group of members in an Experience Cloud site. Members can be either users in your internal org or external users assigned portal profiles. An administrator adds members to an Experience Cloud site by adding a profile or a permission set, and any user with the profile or permission set becomes a member of the site. This object is available in API version 26.0 and later.

[NetworkModeration](#)

Represents a flag on an item in a community. This object is available in API version 30.0 and later.

[NetworkPageOverride](#)

Represents information about custom pages used to override the default pages in Experience Cloud sites. You can create Experience Builder or Visualforce pages and override the default pages in a site. Using custom pages allows you to create a more personalized experience for your users. This object is available in API version 34.0 and later.

[NetworkSelfRegistration](#)

Represents the account that self-registering Experience Cloud users are associated with by default. Self-registering users in an Experience Cloud site are required to be associated with an account, which the admin must specify while setting up self-registration for the site. If an account isn't specified, Salesforce creates person accounts (when enabled) for self-registering users. This object is available in API version 34.0 and later.

[NetworkUserHistoryRecent](#)

Represents an Experience Cloud site user's history of accessed records. This object is available in API version 42.0 and later.

[Note](#)

Represents a note, which is text associated with a custom object or a standard object, such as a Contact, Contract, or Opportunity.

[NoteAndAttachment](#)

This read-only object contains all notes and attachments associated with an object.

[NoteTag](#)

Associates a word or short phrase with a Note.

[OAuthCustomScope](#)

Represents a permission defining the protected data that a connected app can access from an external entity when Salesforce is the OAuth authorization provider.

[OAuthCustomScopeApp](#)

Represents the name of the connected app to which the custom scope is assigned. This object is available in API version 49.0 and later.

[OAuthToken](#)

Represents an OAuth access token for connected app authentication. Use this object to create a user interface for token management. This object is available in API version 32.0 and later.

Standard Objects

[OAuthTokenExchangeHandler](#)

Represents a token exchange handler. The token exchange handler also consists of an Apex class. During the OAuth 2.0 token exchange flow, the token exchange handler is used to validate tokens from an external identity provider and to map users to Salesforce. This object is available in API version 60.0 and later.

[OAuthTokenExchHandlerApp](#)

Represents the enablement settings for a specific Salesforce connected app or external client app that's enabled for the token exchange handler. A handler can be enabled for multiple apps. This object is available in API version 60.0 and later.

[ObjectDataImport](#)

Represents the data import status of one or more object records. This object is available in API version 57.0 and later.

[ObjectDataImportReference](#)

Represents the relationships to the associated reference objects showing the source from which the data is imported. This object is available in API version 57.0 and later.

[ObjectMetadataTag](#)

Represents a meta tag for a store page. Meta tags in HTML documents provide structured data used by search engines for ranking and to show content in search results. This object is available in API version 60.0 and later.

[ObjectPermissions](#)

Represents the enabled object permissions for the parent PermissionSet. This object is available in API version 24.0 and later.

[ObjectRelatedUrl](#)

Represents a URL slug for a Product or Category page on a B2B Commerce or D2C Commerce LWR site, or a custom object, account, or contact page on an enhanced LWR Experience Cloud site. This object is available in API version 57.0 and later.

[ObjectTerritory2AssignmentRule](#)

Represents a territory assignment rule that's associated with an object, such as Account. ObjectTerritory2AssignmentRuleItem can be created or deleted if the BooleanFilter field on its corresponding ObjectTerritory2AssignmentRule is `null`. Available if Sales Territories has been enabled.

[ObjectTerritory2AssignmentRuleItem](#)

A single row of selection criteria for an ObjectTerritory2AssignmentRule object. ObjectTerritory2AssignmentRuleItem can only be created or deleted if the BooleanFilter field on its corresponding ObjectTerritory2AssignmentRule object is a `null` value. Available if Sales Territories has been enabled.

[ObjectTerritory2Association](#)

Represents an association (by assignment) between a territory and an object record such as an account or a lead.

[ObjectUserTerritory2View](#)

Represents a user and object, such as an account or lead, assigned to a territory. This object is available in API version 58.0 and later.

[OmniSupervisorConfig](#)

Represents the Command Center for Service configuration for an assigned group of supervisors. This object is available in API version 41.0 and later.

[OmniSupervisorConfigAction](#)

Represents the actions available to the supervisors of a Command Center for Service configuration. This object is available in API version 56.0 and later.

[OmniSupervisorConfigGroup](#)

Represents the group of reps who are visible to the supervisors of a Command Center for Service configuration. The group, if visible, appears in the Agents tab of Command Center for Service. This object is available in API version 41.0 and later.

Standard Objects

[OmniSupervisorConfigProfile](#)

Represents the supervisor profiles to which a Command Center for Service configuration applies. User-level configurations override profile-level configurations. This object is available in API version 41.0 and later.

[OmniSupervisorConfigQueue](#)

Represents the queues that are visible to the supervisors of a Command Center for Service configuration. The queue, if visible, appears in the Queues Backlog and Assigned Work tabs of Command Center for Service. This object is available in API version 53.0 and later.

[OmniSupervisorConfigSkill](#)

Represents the skills that are visible to the supervisors of a Command Center for Service configuration. These skills, if visible, appear in the Skills Backlog tab of Command Center for Service. This object is available in API version 53.0 and later.

[OmniSupervisorConfigTab](#)

Represents the visible tabs specified in a Command Center for Service configuration. This object is available in API version 60.0 and later.

[OmniSupervisorConfigUser](#)

Represents the users to whom a Command Center for Service configuration applies. User-level configurations override profile-level configurations. This object is available in API version 41.0 and later.

[OpenActivity](#)

This read-only object is displayed in a related list of open activities—future events and open tasks—related to an object. It includes activities for all contacts related to the object. OpenActivity fields for phone calls are only available if your organization uses Salesforce CRM Call Center.

[OperatingHours](#)

Represents the hours in which a service territory, service resource, or account is available for work. OperatingHours is used by Field Service, Salesforce Scheduler, Salesforce Meetings, Sales Engagement, and Workforce Engagement. This object is available in API version 38.0 and later.

[OperatingHoursHistory](#)

Represents the history of changes made to tracked fields on an operating hours record. This object is available in API version 38.0 and later.

[OperatingHoursHoliday](#)

Represents the day or hours for which a service territory and service resources exclusive to the service territory are unavailable in Salesforce Scheduler. This object is available in API version 54.0 and later.

[Opportunity](#)

Represents an opportunity, which is a sale or pending deal.

[OpportunityCompetitor](#)

Represents a competitor on an Opportunity.

[OpportunityContactRole](#)

Represents the role that a Contact plays on an Opportunity.

[OpportunityContactRoleSuggestionInsight](#)

Represents a suggestion for a new opportunity contact role. Available in API versions 45.0 and later.

[OpportunityFieldHistory](#)

Represents the history of changes to the values in the fields of an opportunity. This object is available in versions 13.0 and later.

[OpportunityHistory](#)

Represents the stage history of an opportunity.

Standard Objects

[OpportunityInsight](#)

Represents an individual insight (deal prediction, follow-up reminder, or key moment) related to an opportunity record.

[OpportunityLineItem](#)

Represents an opportunity line item, which is a member of the list of Product2 products associated with an Opportunity.

[OpportunityLineItemSchedule](#)

Represents information about the quantity, revenue distribution, and delivery dates for a particular `OpportunityLineItem`.

[OpportunityLineItemSplit](#)

Represents information about an opportunity product split, including percentages, amounts, and owner. This object is available in API version 58.0 and later.

[OpportunityOwnerSharingRule](#)

Represents a rule for sharing an opportunity with users other than the owner.

[OpportunityPartner](#)

This object represents a partner relationship between an Account and an Opportunity. An `OpportunityPartner` record is created automatically when a `Partner` record is created for a partner relationship between an account and an opportunity.

[OpportunityRelatedDeleteLog](#)

Represents an audit log of the deletion of opportunity-related child records, such as opportunity team members, product splits, or opportunity splits. This object is available in API version 59.0 and later.

[OpportunityShare](#)

Represents a sharing entry on an Opportunity.

[OpportunitySplit](#)

`OpportunitySplit` credits one or more opportunity team members with a portion of the opportunity amount. This object is available in API version 16.0 and later for pilot customers, and version 28.0 and later for others.

[OpportunitySplitType](#)

`OpportunitySplitType` provides unique labels and behavior for each split type. This object is available in API version 28.0 and later.

[OpportunityStage](#)

Represents the stage of an Opportunity in the sales pipeline, such as New Lead, Negotiating, Pending, Closed, and so on.

[OpportunityTag](#)

Associates a word or short phrase with an Opportunity.

[OpportunityTeamMember](#)

Represents a User on the opportunity team of an Opportunity.

[OpptyLineItemSplitType](#)

Represents an opportunity product split type. This object is available in API version 58.0 and later.

[Order](#)

Represents an order associated with a contract or an account.

[OrderAction](#)

Indicates the type of order, such as a new sale or a cancellation. This object is available in API version 55.0 and later.

[OrderAdjustmentGroup](#)

Group containing a set of adjustments applied to an order. This object is available in API version 48.0 and later.

Standard Objects

[OrderAdjustmentGroupSummary](#)

Represents the current properties and state of a group of related price adjustments. Associated with a set of [OrderItemAdjustmentLineSummaries](#) that apply to [OrderItemSummaries](#) belonging to one [OrderSummary](#). Corresponds to one or more order adjustment group objects, consisting of an original object and any change objects applicable to it. This object is available in API version 48.0 and later.

[OrderChangeLog](#)

Represents a log record of all change requests made to an order post activation. A log record is always one-to-one to change an order request. This object is available in API version 48.0 and later.

[OrderChgReasonCategMap](#)

The mapping between an order change reason and a service flow category. This object is available in API version 65.0 and later.

[OrderDeliveryGroup](#)

A group of order items that share a delivery method and address. The delivery method and address are used during the fulfillment process, such as shipping as a gift, downloading, picking up in store, or shipping to a standard address. This object is available in API version 48.0 and later.

[OrderDeliveryGroupSummary](#)

Represents the current properties and state of a group of [OrderItemSummaries](#), belonging to one [OrderSummary](#), to be fulfilled using the same delivery method and delivered to the same address. A single shipment can include them all, but that isn't guaranteed. Corresponds to one or more order delivery group objects, consisting of an original object and any change objects applicable to it. This object is available in API version 48.0 and later.

[OrderDeliveryMethod](#)

Shows the customizations and options that a buyer selected for their delivery method. This object is available in API version 48.0 and later.

[OrderHistory](#)

Represents historical information about changes that have been made to the standard fields of the associated order, or to any custom fields with history tracking enabled.

[OrderItem](#)

Represents an order product that your organization sells.

[OrderItemAdjustmentLineItem](#)

An adjustment that has been made to an order item. This object is available in API version 48.0 and later.

[OrderItemAdjustmentLineSummary](#)

Represents the current properties and state of price adjustments on an [OrderItemSummary](#). Corresponds to one or more order item adjustment line item objects, consisting of an original object and any change objects applicable to it. This object is available in API version 48.0 and later.

[OrderItemGroup](#)

Stores the group information for line items in an order. It also stores the aggregated line field information (subtotal). It contains a parent-child relationship to order. This object is available in API version 62.0 and later.

[OrderItemRecipient](#)

Represents a site, employee, or other entity for which services are being ordered. This includes essential details such as the recipient's name, contact information, and the specific site or location where the services will be provided. This object is available in API version 62.0 and later.

[OrderItemRelationship](#)

Describes a relationship between order products. This object is available in API version 58.0 and later.

Standard Objects

[OrderItemSummary](#)

Represents the current properties and state of a product or charge on an OrderSummary. Corresponds to one or more order item objects, consisting of an original object and any change objects applicable to it. This object is available in API version 48.0 and later.

[OrderItemSummaryChange](#)

Represents a change to an OrderItemSummary, usually a reduction in quantity due to a cancel or return. Corresponds to a change order item. This object is available in API version 48.0 and later.

[OrderItemSummaryRelationship](#)

Junction object used to track how an original order summary (created before any exchanges have occurred) relates to other order summary objects in a chain of exchange orders. This object is available in API version 60.0 and later. An exchange order is an OrderSummary object whose SourceProcess property is set to Exchange. An original order summary can have an exchange order, which in turn can have yet another exchange order, and so on. The OrderSummaryRelationship object maintains this relationship between OrderSummary objects.

[OrderItemTaxLineItem](#)

The tax amount that has been applied to an order item. This object is available in API version 48.0 and later.

[OrderItemTaxLineItemSummary](#)

Represents the current tax on an OrderItemSummary or OrderItemAdjustmentLineSummary. Corresponds to one or more order item tax line items, consisting of an original object and any change objects applicable to it. This object is available in API version 48.0 and later.

[OrderItemType](#)

Shows whether the order product is a product line or charge line. This object is available in API version 48.0 and later.

[OrderOwnerSharingRule](#)

Represents a rule which determines order sharing access for the order's owners.

[OrderPaymentSummary](#)

Represents the current properties and state of payments using a single payment method that are applied to one OrderSummary. This object is available in API version 48.0 and later.

[OrderPaymentSummaryReference](#)

OrderPaymentSummaryReference is a junction object that allows an order payment summary to be shared with another order summary. This object is available in API version 60.0 and later.

[OrderShare](#)

Represents a sharing entry on an Order. This object is available in API version 48.0 and later.

[OrderStatus](#)

Represents the status of the order entity. This object is available in API version 48.0 and later.

[OrderSummary](#)

Represents the current properties and state of an order. Corresponds to one or more order objects, consisting of an original object and any change objects applicable to it. This object is available in API version 48.0 and later.

[OrderSummaryAdditionalInfo](#)

Stores information related to OrderSummary including context around the order, such as inventory reservation details, order origination, and other values that Einstein uses to perform order analysis. Only reservation details can be stored in this object. This object is available in API version 58.0 and later.

[OrderSummaryRelationship](#)

Junction object used to track how an original order summary (created before any exchanges have occurred) relates to other order summary objects in a chain of exchange orders. This object is available in API version 60.0 and later.

Standard Objects

[OrderSummaryRoutingSchedule](#)

Represents an attempt to route an order summary to one or more inventory locations for fulfillment. You can use it to schedule future attempts and to record completed attempts. This object is available in API version 51.0 and later.

[Organization](#)

Represents key configuration information for an organization.

[OrgDeleteRequest](#)

Represents a request to delete a developer edition (DE) org. This object is available in API version 42.0 and later. It is available only in Developer and Database.com editions.

[OrgEmailAddressSecurity](#)

Defines the assignment of a user profile to an org-wide email address. This object is available in API version 58.0 and later.

[OrgMetric](#)

Represents a feature or metric that Salesforce Optimizer evaluates. This object is available in API version 47.0 and later.

[OrgMetricScanResult](#)

Represents data or an item associated with a feature's results in a Salesforce Optimizer evaluation. For example, for the Custom Field Limit feature, an OrgMetricScanResult object represents an object flagged for approaching the custom field limit. This object is available in API version 47.0 and later.

[OrgMetricScanSummary](#)

Represents the results summary for a specific feature in a Salesforce Optimizer evaluation. This object is available in API version 47.0 and later.

[OrgSnapshot](#)

Represents a snapshot of a scratch org. Snapshots capture the state of a scratch org so that you can use it to quickly spin up new scratch orgs using its configuration. This object is available in API version 61.0 and later.

[OrgWideEmailAddress](#)

Represents an organization-wide email address for user profiles.

[OSAsyncChgCompletedEvent](#)

An event that allows the processing of the credit memo, invoices, and other entities after a bulk action has successfully completed. The event provides all of the values that would exist on the synchronous APIs. This object is available in API version 63.0 and later.

[OutOfOffice](#)

Represents a user-set value on a profile that shows when the user intends to be out of the office. This object is available in API version 41.0 and later.

[OutgoingEmail](#)

For internal use only.

[OutgoingEmailRelation](#)

For internal use only.

[OwnedContentDocument](#)

Represents a file owned by a user. This object is available in version 30.0 and later.

[OwnerChangeOptionInfo](#)

Represents default and optional actions that can be performed when a record's owner is changed. Available in API version 35.0 and later, but to query for change owner metadata, use the OwnerChangeOptionInfo object in Tooling API instead. For more information, see [OwnerChangeOptionInfo](#) in the Tooling API.

Standard Objects

[PackageInstallEventLog](#)

PackageInstallEventLog stores details about package installation in the organization. This object is available in API version 62.0 and later.

[PackageLicense](#)

Represents a license for an installed managed package. This object is available in API version 31.0 and later.

[PackagePushError](#)

Represents an error encountered during a push request. The number of PackagePushError records created depends on the number of push jobs in the request that result in an error.

[PackagePushJob](#)

Represents an individual push job for upgrading a package in an org from one version to another version. There can be multiple push jobs created for one push request. For example, if you want to upgrade five orgs as part of one push, you have one PackagePushRequest record and five PackagePushJob records.

[PackagePushRequest](#)

Represents the push request for upgrading a package in one or many orgs from one version to another version.

[PackageSubscriber](#)

Represents an installation of a package in an org. This object contains installation information for managed or unlocked packages developed in the org you're logged in to.

[Participant](#)

Represents a participant in a ConversationParticipant. An existing or new Participant is referenced each time a new ConversationParticipant is created. This object is available in API version 57.0 and later.

[Partner](#)

Represents a partner relationship between two Account records or between an Opportunity record and an Account record.

[PartnerFundAllocation](#)

Represents allocated funds from a partner marketing budget for channel partners. This object is available in API version 41.0 and later.

[PartnerFundClaim](#)

Represents a claim of funds from the partner marketing budget by a channel partner. This object is available in API version 41.0 and later.

[PartnerFundRequest](#)

Represents a request for funds from the partner marketing budget by a channel partner. This object is available in API version 41.0 and later.

[PartnerMarketingBudget](#)

Represents a budget that provides funds to channel partners for selling and marketing products and services. This object is available in API version 41.0 and later.

[PartnerNetworkConnection](#)

Represents a Salesforce to Salesforce connection between Salesforce organizations.

[PartnerNetworkRecordConnection](#)

Represents a record shared between Salesforce organizations using Salesforce to Salesforce.

[PartnerNetworkSyncLog](#)

Represents the Org Sync Log tab in Salesforce, where Salesforce administrators can track the replication of record inserts and updates being performed in Organization Sync. The Connection Detail page for the replication connection also displays the Org Sync Log's twenty most recent entries, and provides a link to the log.

Standard Objects

[PartnerRole](#)

Represents a role for an account Partner, such as consultant, supplier, and so on.

[PartyConsent](#)

Represents consent preferences for an individual. This object is available in API version 48.0 and later.

[Payment](#)

Represents a single event when a shopper makes a payment. For credit cards, this event is a payment capture or payment sale, but it doesn't appear on the shopper's credit card statement. This object is available in API version 48.0 and later.

[PaymentAuthAdjustment](#)

Shows information about an adjustment made to an authorized transaction. This object is available in API version 51.0 and later.

[PaymentAuthorization](#)

Represents a single payment authorization event where users can capture or reverse a payment against a reserve of funds. This object is available in API version 48.0 and later.

[PaymentCredit](#)

Tracks the amount of money returned to the customer. The return can be a store credit, a gift card, or another type of credit. It's linked to the original payment record and includes the total credit amount issued. This object is available in API version 65.0 and later.

[PaymentCreditLinePayment](#)

A payment credit line payment. This object is available in API version 65.0 and later.

[PaymentCreditTransaction](#)

A payment credit transaction. This object is available in API version 65.0 and later.

[PaymentGateway](#)

Platform object that represents the connection to an external payment gateway. This object is available in API version 48.0 and later.

[PaymentGatewayLog](#)

Stores information exchanged between the Salesforce payments platform and external payment gateways. Gateway logs can also record payloads from external payment entities. This object is available in API version 48.0 and later.

[PaymentGatewayProvider](#)

Setup entity for payment gateways. Defines the connection to a payment gateway Apex adapter. This object is available in API version 48.0 and later.

[PaymentGroup](#)

Top-level object that groups all payment transactions that are processed for an order or invoice. PaymentGroup is a standalone object, so it isn't required for users to execute payment transactions (authorizations, captures, refunds, and sales). This object is available in API version 48.0 and later.

[PaymentInitiationSource](#)

Represents the originating source of a payment. This information helps other Salesforce products integrate with Salesforce Payments. This object is available in API version 63.0 and later.

[PaymentIntent](#)

Represents data temporarily stored during a transaction's lifecycle that can identify the buyer, the merchant, and the amount the buyer is sending to the merchant. Data such as timestamp and amount returned can also be stored in PaymentIntent. This object is available in API version 58.0 and later.

[PaymentIntentEvent](#)

Represents a payment intent platform event. Subscribe to these events so you can listen and respond to them when they're published. For example, create a Salesforce Flow that is triggered when one of these events is published. This object is available in API version 59.0 and later.

Standard Objects

[PaymentLineInvoice](#)

Represents a payment allocated to or unallocated from an invoice. This object is available in API version 48.0 and later.

[PaymentLink](#)

A link that a merchant can share with customers to collect payments for products and services. The payment link, which you can embed into a Salesforce app or send directly to a customer, directs the customer to a Pay Now payment page. The page can show a total amount owed or an itemized list of products, shipping and tax charges, and a total amount owed. The customer enters their contact and payment details, and submits their payment. The amounts are shown in the store's currency. This object is available in API version 58.0 and later.

[PaymentLinkEvent](#)

Represents a payment link platform event. Subscribe to these events so you can listen and respond to them when they're published. For example, create a Salesforce Flow that is triggered when one of these events is published. This object is available in API version 59.0 and later.

[PaymentMethod](#)

Represents the method that a buyer uses to compensate the seller of a good or service. Common payment methods include cash, checks, credit or debit cards, money orders, bank transfers, and online payment services. This object is available in API version 48.0 and later.

[PymtSchdDistributionMethod](#)

Indicates how the total payment is divided into partial payments. This object is available in API version 56.0 and later.

[PaymentScheduleTreatmentDtl](#)

Contains configuration information for the payment schedule treatment detail. This object is available in API version 56.0 and later.

[PaymentTerm](#)

Defines your company's method and expectations for receiving payment. This object is available in API version 55.0 and later.

[PaymentTermItem](#)

Defines the attributes of a payment term that your company uses. The PaymentTermItem is used to determine the due date on invoices. This object is available in API version 55.0 and later.

[PaymentSchedule](#)

The payment schedule represents a collection of payments that a customer wants to collect at different times for a certain record. A schedule contains one or more payment schedule items, where each item represents one payment to be processed. Each of a schedule's items can have different payment configuration fields, such as payment methods, payment dates, and payment accounts. When a payment scheduler launches a payment run, the run evaluates active payment schedule items, and picks them up for payment processing if they align with the scheduler's payment criteria. This object is available in API version 55.0 and later.

[PaymentScheduleItem](#)

A payment schedule contains one or more payment schedule items, where each item represents one payment to be processed. Each of a schedule's items can have different payment configuration fields, such as payment methods, payment dates, and payment accounts. When a payment scheduler launches a payment run, the run evaluates active payment schedule items, and picks them up for payment processing if they align with the scheduler's payment criteria. This object is available in API version 55.0 and later.

[PaymentSchedulePolicy](#)

Contains configuration information for the payment schedule policy. This object is available in API version 56.0 and later.

[PaymentScheduleTreatment](#)

Contains configuration information for the payment schedule. This object is available in API version 56.0 and later.

[PendingOrderSummary](#)

Object representing a B2C Commerce order ingested via High Scale Orders before an OrderSummary is created for it. Optimized for online transaction processing (OLTP). This object is available in API version 55.0 and later.

Standard Objects

[PendingServiceRouting](#)

Represents the routing details of a work item that's waiting to be routed or assigned. This object is available in API version 40.0 and later.

[PendingServiceRoutingInteractionInfo](#)

Represents PendingServiceRouting interaction information that's used when work is routed to an agent. For a screen pop, it specifies which records to open when work is routed to an agent from a specific channel. PendingServiceRoutingInteractionInfo is read-only. This object is available in API version 53.0 and later.

[Period](#)

Represents a fiscal period defined in FiscalYearSettings.

[PermissionSet](#)

Represents a set of permissions that's used to grant more access to one or more users without changing their profile or reassigning profiles. This object is available in API version 22.0 and later.

[PermissionSetAssignment](#)

Represents a user's assignment to a permission set or permission set group. This object is available in API version 22.0 and later.

[PermissionSetGroup](#)

Represents a group of permission sets and the permissions within them. Use permission set groups to organize permissions based on job functions or tasks. Then, you can package the groups as needed. This object is available in API version 45.0 and later.

[PermissionSetGroupComponent](#)

A junction object that relates the PermissionSetGroup and PermissionSet objects via their respective IDs; enables permission set group recalculation to determine the aggregated permissions for the group. This object is available in API version 45.0 and later.

[PermissionSetLicense](#)

Represents a license that's used to enable one or more users to receive a specified permission without changing their profile or reassigning profiles. You can use permission set licenses to grant access, but not to deny access. This object is available in API version 29.0 and later.

[PermissionSetLicenseAssign](#)

Represents the association between a User and a PermissionSetLicense. This object is available in API version 29.0 and later.

[PermissionSetLicenseDefinition \(Developer Preview\)](#)

Represents the definition of a custom permission set license, which entitles specified features in a package. This object is available in API version 54.0 and later.

[PermissionSetTabSetting](#)

Represents a permission set tab setting. Requires the View Setup permission. Use this object to query all tab settings of the permission set. This object is available in API version 45.0 and later.

[PersnlBatchDecision](#)

Represents a batch personalization that delivers personalization decisions (content or recommendations) to a customer segment. Available in API version 64.0 and later.

[PersonAccountOwnerPowerUser](#)

Represents a user who can own more than 50,000 customer or partner portal accounts. Person account owner power users can own a large number of either customer or partner users. Their role can't be changed and they must be at the root of the role hierarchy. Person account owner power user objects can't be created if deferred sharing is turned on for your org. Person account owner power user objects can be created while deferred sharing is turned off for an org. Deferred sharing can be turned back on after person account owner power user objects have been created. This object is available in API version 57.0 and later.

[PersonalOrgInfo](#)

Represents the information for a Tableau Next personal org. This object is available in API version 64.0 and later.

Standard Objects

[PersonalizationDecision](#)

Represents a set of targeting rules within a personalization point that determine an individual's eligibility to receive personalized content and the content to deliver. Available in API version 62.0 and later.

[PersonalizationObjective](#)

Represents a specific business outcome that you want to achieve when creating a recommender. Available in API version 62.0 and later.

[PersonalizationPoint](#)

Represents a specific touch point in an experience where a personalization decision can be made. It connects a data space, profile data graph, personalization type, and response template to deliver personalized content at that time in a customer journey. Available in API version 62.0 and later.

[PersonalizationSchema](#)

Represents a personalization response template that's used when you build a personalization decision. Available in API version 62.0 and later.

[PersonalizationTargetInfo](#)

Represents a target for an audience. This object is available in API version 47.0 and later.

[PermissionUpdateEventLog](#)

Permission update events represent changes to object, field, and user permissions and setup entity access that occur in profiles and permission sets. The event type also tracks if you clone profiles or change whether session activation is required in permission sets or permission set groups. This object is available in API version 65.0 and later.

[PersonTraining](#)

Represents an assignment of a learning module in Workforce Engagement. This object is available in API version 54.0 and later.

[PicklistValueInfo](#)

Represents the active picklist values for a given picklist field. This object is available in API version 40.0 and later.

[PickTicket](#)

A PickTicket represents quantities of one or more products to be picked for fulfillment at a location. It can include products belonging to one or more fulfillment orders. This object is available in API version 57.0 and later.

[PickTicketAssignment](#)

Represents the association of a FulfillmentOrder with a PickTicket. A PickTicket has one PickTicketAssignment for each FulfillmentOrder containing products to be picked as part of that PickTicket. This object is available in API version 57.0 and later.

[PickTicketProduct](#)

Represents a quantity of a product to be picked as part of a PickTicket. It can include quantities for multiple FulfillmentOrders. This object is available in API version 57.0 and later.

[PipelineInspectionListView](#)

Represents a pipeline view, an intelligence view, or a saved filter. A pipeline view shows a set of opportunity records, based on specific criteria. An intelligence view shows a set of account, lead, or contact records, based on specific criteria. This object is available in API version 53.0 and later.

[PipelineInspectionSumField](#)

Use this object to learn which field from the opportunity object is used to aggregate Pipeline Inspection metrics on a pipeline view. This object is available in API version 56.0 and later.

[PipelineInspMetricConfig](#)

Represents the configuration of a forecast category metric that appears in the Pipeline Inspection view. This object is available in API version 55.0 and later.

Standard Objects

[PipelineInspMetricConfigLocalization](#)

Represents the translated label of a Pipeline Inspection metric. This object is available in API version 55.0 and later.

[PlatformAction](#)

PlatformAction is a virtual read-only object. It enables you to query for actions displayed in the UI, given a user, a context, device format, and a record ID. Examples include standard and custom buttons, quick actions, and productivity actions.

[PlatformEventUsageMetric](#)

Contains usage data for event publishing and delivery to CometD and Pub/Sub API clients, `empApi` Lightning components, and event relays. If Enhanced Usage Metrics isn't enabled, usage data is available for the last 24 hours, ending at the last hour, and for historical daily usage. In API 58.0 and later, you can enable Enhanced Usage Metrics to get usage data by event name and client for granular time intervals. PlatformEventUsageMetric contains separate usage metrics for platform events and change data capture events. This object is available in API version 50.0 and later.

[PlatformStatusAlertEvent](#)

The documentation has moved to [PlatformStatusAlertEvent](#) in the *Platform Events Developer Guide*.

[PortalDelegablePermissionSet](#)

PortalDelegablePermissionSet is a base platform object used to store permission sets that can be assigned by a delegated portal/external user admin (DPUA) to portal users. This object is available in API version 47.0 and later.

[PresenceConfigDeclineReason](#)

Represents the settings for a decline reason that a presence user provides when declining work. This object is available in API version 37.0 and later.

[PresenceDeclineReason](#)

Represents an Omni-Channel decline reason that agents can select when declining work requests. This object is available in API version 37.0 and later.

[PresenceUserConfig](#)

Represents a configuration that determines a presence user's settings. This object is available in API version 32.0 and later.

[PresenceUserConfigProfile](#)

Represents a configuration that determines the settings that are assigned to presence users who are assigned to a specific profile. User-level configurations override profile-level configurations. This object is available in API version 32.0 and later.

[PresenceUserConfigUser](#)

Represents a configuration that determines the settings that are assigned to a presence user. These user-level configurations override profile-level configurations. This object is available in API version 32.0 and later.

[PriceAdjustmentGroupShape](#)

Defines the business logic for a top-level price adjustment, for example, a discount applied to an entire order. This object is available in API version 57.0 and later.

[PriceAdjustmentItemShape](#)

Defines the business logic for an item-level price adjustment, for example, a discount on an order item. This object is available in API version 57.0 and later.

[PriceAdjustmentSchedule](#)

Represents a series of discounts offered depending on your product's configuration, quantity, and when they're purchased in combination with other products. This object is available in API version 47.0 and later.

[PriceAdjustmentTier](#)

Represents a discount tier in a price adjustment schedule. This object is available in API version 47.0 and later.

[Pricebook2](#)

Represents a price book that contains the list of products that your org sells.

Standard Objects

[Pricebook2History](#)

Represents historical information about changes that have been made to the standard fields of the associated Pricebook2, or to any custom fields with history tracking enabled. This object is available in API version 66.0 and later.

[PricebookEntry](#)

Represents a product entry (an association between a Pricebook2 and Product2) in a price book.

[PricebookEntryAdjustment](#)

Read-only junction object created when you associate a price adjustment schedule with a price book entry. This object is available in API version 47.0 and later.

[PriceProtectionExecution](#)

Represents an instance of running the price protection process, capturing execution time, status, and the effective date of price changes. This object is available in API version 63.0 and later.

[PriceProtectExecLineItem](#)

Represents a line item created as part of a Price Protection Execution. This object is available in API version 63.0 and later.

[PriceProtectionTerm](#)

Represents a configuration record that defines the rules, types, and eligible conditions for price protection. This object is available in API version 63.0 and later.

[PrivacyHold](#)

Represents a Privacy Hold that indicates that a record should be preserved from masking or deletion by Data Management policies in Privacy Center. This object is available in API version 59.0 and later.

[PrivacyHoldReason](#)

Represents the business or legal purpose for why a record has a Privacy Hold. This object is available in API version 59.0 and later.

[PrivacyJobSession](#)

Represents the status of past, ongoing, and scheduled policy jobs in Privacy Center. This object is available in API version 59.0 and later.

[PrivacyObjectSession](#)

Represents the status of each object being processed in past, ongoing, and scheduled policy jobs in Privacy Center. This object is available in API version 59.0 and later.

[PrivacyRequest](#)

See details and monitor the status of Data Subject Access Requests made in Privacy Center. This object is available in API version 54.0 and later.

[PrivacyRTBRequest](#)

Represents a Right to Be Forgotten Request made in Privacy Center. This object is available in API version 59.0 and later.

[PrivacySessionRecordFailure](#)

Represents error messages encountered during policy job executions in Privacy Center. This object is available in API version 59.0 and later.

[Problem](#)

Problems represent the root cause data of one or more incidents. This object contains all the details of a problem, documenting the history of the problem from detection to closure. This object is available in API version 53.0 and later.

[ProblemIncident](#)

Represents a junction object that relates a Problem to an Incident. This object is available in API version 53.0 and later.

[ProblemRelatedItem](#)

Represents a junction object that relates a Problem to an Asset. This object is available in API version 53.0 and later.

Standard Objects

[ProcessDefinition](#)

Represents the definition of a single approval process.

[ProcessException](#)

Represents a business exception, such as a processing failure on an order summary. A separate process is required to resolve the failure that caused the process exception before processing can continue. This object is available in API version 50.0 and later.

[ProcessFlowMigration](#)

Represents a process's migrated criteria and the resulting migrated flow. This object is available in API version 58.0 and later.

[ProcessInstance](#)

Represents an instance of a single, end-to-end approval process. Use this and the node, step, and workitem process instance objects to create approval history reports.

[ProcessInstanceHistory](#)

This read-only object shows all steps and pending approval requests associated with an approval process (ProcessInstance).

[ProcessInstanceNode](#)

Represents a step in an instance of an approval process. Compare to ProcessNode, which describes the step in a process definition. Use this object to retrieve approval history.

[ProcessInstanceStep](#)

Represents one work item in an approval process (ProcessInstance).

[ProcessInstanceWorkitem](#)

Represents a user's pending approval request.

[ProcessNode](#)

Describes a step in a process definition. Compare to ProcessInstanceNode, which describes a step in a running process. This object is available in API version 31.0 and later.

[ProducerCommission](#)

Represents a producer's commission for an insurance policy. The commission can be calculated from the commissionable transactions or can be populated from an external system. This object is available in API version 51.0 and later.

[Product2](#)

Represents a product that your company sells.

[Product2DataTranslation](#)

Represents the translated values of the data stored within a [Product2](#) record's fields. This object is available in API version 45.0 and later.

[ProductAttribute](#)

Represents the attributes that can be associated with a product. This object is available in API version 50.0 and later.

[ProductAttributeSet](#)

Represents a group of attributes that can be associated with a product. This object is available in API version 50.0 and later.

[ProductAttributeSetItem](#)

Represents a set of attributes that can be associated with a product. This object is available in API version 50.0 and later.

[ProductAttributeSetProduct](#)

Represents the product associated with a set of attributes. This object is available in API version 50.0 and later.

[ProductCatalog](#)

The container that holds a Product Category hierarchy. This object is available in API version 55.0 and later.

Standard Objects

[ProductCategory](#)

Represents the category that products are organized in. This object is available in API version 49.0 and later.

[ProductCategoryProduct](#)

Holds the relation between product and product category to assign products to a category. This object is available in API version 55.0 and later.

[ProductCategoryDataTranslation](#)

Represents the translated values for the data stored within a [ProductCategory](#) record's fields. This object is available in API version 46.0 and later.

[ProductComponentGroup](#)

Represents the logical grouping of associated products in a bundle and the products' arrangement policy (group cardinality). This object is available in API version 58.0 and later.

[ProductConsumed](#)

Represents an item from your inventory that was used to complete a work order or work order line item in field service.

[ProductDetectedPriceChange](#)

Represents a detected change in price for a product associated with a partner account. This object is available in API version 63.0 and later.

[ProductEntitlementTemplate](#)

Represents predefined terms of customer support (Entitlement) that users can add to products (Product2).

[ProductFeaturedProduct](#)

Represents the user-defined collection of featured products that are meant to cross-sell or upsell with your product. This object is available in API version 64.0 and later.

[ProductItem](#)

Represents the stock of a particular product at a particular location in field service, such as all bolts stored in your main warehouse.

[ProductItemTransaction](#)

Represents an action taken on a product item in field service. Product item transactions are auto-generated records that help you track when a product item is replenished, consumed, or adjusted.

[ProductMedia](#)

Represents the rich media, including images and attachments, that can be added to products. This object is available in API version 49.0 and later.

[ProgramProduct](#)

Represents a junction between Program and Product2. This will hold Product2 values related to a Program. This object is available in API version 58.0 and later.

[ProductQuantityRule](#)

Represents the relationship between a quantity rule and a product. This object assigns quantity rules to a product. This object is available in API version 51.0 and later.

[ProductRelatedComponent](#)

Represents a product that is included in a product bundle, a set, or a product and an add-on. This object is available in API version 57.0 and later.

[ProductRelationshipType](#)

Defines the relationship between two sales transaction items. For example, defines a relationship between a bundle and a bundle component. This object is available in API version 57.0 and later.

Standard Objects

[ProductRequest](#)

Represents an order for a part or parts in field service.

[ProductRequestLineItem](#)

Represents a request for a part in field service. Product request line items are components of product requests.

[ProductRequired](#)

Represents a product that is needed to complete a work order or work order line item in field service.

[ProductSellingModel](#)

Defines one method by which a product can be sold; for example, as a one-time sale, an evergreen subscription, or a term-defined subscription. If the product is sold on subscription, this object defines the subscription's term. A product can have multiple product selling models. This object is available in API version 55.0 and later.

[ProductSellingModelOption](#)

A junction object between Product Selling Model and Product2. This object is available in API version 55.0 and later.

[ProductServiceCampaign](#)

Represents a set of activities to be performed on a product service campaign asset, such as a product recall for safety issues or product defects. This object is available in API version 51.0 and later.

[ProductServiceCampaignItem](#)

Represents a product service campaign's asset. This object is available in API version 51.0 and later.

[ProductServiceCampaignItemStatus](#)

Represents a status for a product service campaign item in field service. This object is available in API version 51.0 and later.

[ProductServiceCampaignStatus](#)

Represents a status for a product service campaign in field service. This object is available in API version 51.0 and later.

[ProductTransfer](#)

Represents the transfer of inventory between locations in field service.

[ProductWarrantyTerm](#)

Defines the relationship between a product or product family and warranty term. This object is available in API version 50.0 and later.

[Profile](#)

Represents a profile, which defines a set of permissions to perform different operations. Operations can include creating a custom profile or querying, adding, updating, or deleting information.

[ProfileSkill](#)

Represents a profile skill, which describes a user's professional knowledge. This is a global record for the organization, and users are associated through the ProfileSkillUser object.

[ProfileSkillEndorsement](#)

Represents a detail relationship of ProfileSkillUser. An endorsement of a profile skill shows approval and support of another user's publicly declared skill.

[ProfileSkillShare](#)

Represents a sharing entry on a ProfileSkill.

[ProfileSkillUser](#)

Represents a detail relationship of User. The object connects profile skills with users.

[ProgramRebateType](#)

Represents a rebate structure associated with a Rebate Program. This object is available in API version 63.0 and later.

Standard Objects

[Promotion](#)

Represents a promotion for B2B or D2C stores. This object is available in API version 52.0 and later.

[PromotionLineItemRule](#)

Lists compound conditions about a promotion. This object is available in API version 59.0 and later.

[PromotionMarketSegment](#)

Represents a market segment within B2B Commerce that promotions can be assigned to. This object is available in API version 52.0 and later.

[PromotionQualifier](#)

Represents the product, product category, or order that you want to target with your promotion qualifier in a B2B or D2C store. This object is available in API version 52.0 and later.

[PromotionSegment](#)

Represents a promotion segment, which you can assign to different stores or buyer groups, allowing them to access the promotion. This object is available in API version 52.0 and later.

[PromotionSegmentBuyerGroup](#)

Represents a promotion segment, associated with a buyer group, and used for B2B Commerce. This object is available in API version 52.0 and later.

[PromotionSegmentSalesStore](#)

Represents a promotion segment, associated with a store, and used for B2B Commerce. This object is available in API version 52.0 and later.

[PromotionTarget](#)

Represents the product, product category, or order that you want to target with your promotion in a B2B Store or D2C store. This object is available in API version 52.0 and later.

[PromotionTier](#)

Represents a tier of a promotion that includes multiple tiers. A promotion can have up to 10 tiers. This object is available in API version 57.0 and later.

[Prompt](#)

Represents record details about an in-app guidance prompt or walkthrough. Available in API version 46.0 and later.

[PromptAction](#)

Represents how the user interacted with the in-app guidance prompt or walkthrough. Available in API version 46.0 and later.

[PromptError](#)

Represents the error or warning associated with the PromptAction. Available in API version 52.0 and later.

[PromptActionOwnerSharingRule](#)

Represents a rule which determines `PromptAction` sharing access for the owners. Available in API version 46.0 and later.

[PromptActionShare](#)

Represents a sharing entry on a prompt action record. Available in API version 46.0 and later.

[PromptLocalization](#)

Represents the translated value of a label for record details about in-app guidance when the Translation Workbench is enabled for your org. Available in API version 48.0 and later.

[PromptVersion](#)

Represents an in-app guidance prompt or walkthrough. Available in API version 46.0 and later.

Standard Objects

[PromptVersionLocalization](#)

Represents the translated value of a label for-app guidance when the Translation Workbench is enabled for your org. Available in API version 48.0 and later.

[Prospect](#)

Represents a prospect. A prospect is an individual who has shared contact information, but isn't yet qualified. This object is available in API version 63.0 and later.

[ProspectingAgentDataSource](#)

For internal use only.

[ProspectingAgentRcmdTarget](#)

Represents prospecting information suggested by generative AI. This object is available in API version 66.0 and later.

[ProspectingAgentSpec](#)

For internal use only.

[ProspectingAgentSpecParm](#)

For internal use only.

[ProspectingAgentUserSpec](#)

For internal use only.

[ProrationPolicy](#)

Defines how the price of a subscription is divided into time periods and how the price is calculated for each time period. This object is available in API version 55.0 and later.

[PublicComplaint](#)

Represents the complaints submitted by public users. This object is available in API version 49.0 and later.

[PurchaseQuantityRule](#)

Represents a rule that restricts the quantity of a product that can be purchased. The rule can be an increment, minimum, or maximum rule. This object is available in API version 52.0 and later.

[PushTopic](#)

Represents a query that is the basis for notifying Streaming API clients of changes to records in an org. This object is available in API version 21.0 and later.

[PushUpgradeCustomization](#)

Customized push upgrades allow a package subscriber to block push upgrades to their org. Package developers control which subscribers can opt into customized push upgrades. Each push upgrade customization maps to a specific package and to a specific subscriber org. This object is available in API version 60.0 and later.

[QueuedExecutionEventLog](#)

Queued Execution events contain details about queued executions—for example, batch Apex. This object is available in API version 65.0 and later.

[QueueRoutingConfig](#)

Represents the settings that determine how work items are routed to agents. This object is available in API version 32.0 and later.

[Question](#)

Represents a question in a zone that users can view and reply to.

[QuestionDataCategorySelection](#)

A data category selection represents a data category that classifies a question.

[QuestionReportAbuse](#)

Represents a user-reported abuse on a Question in a Chatter Answers zone. This object is available in API version 24.0 and later.

Standard Objects

[QuestionSubscription](#)

Represents a subscription for a user following a Question. This object is available in API version 24.0 and later.

[QueueSubject](#)

Represents the mapping between a queue Group and the types associated with the queue, including custom objects.

[QuickText](#)

This object stores a snippet of text that allows users to send a quick response to a customer. Use quick text to create greetings, answers to common questions, short notes, and more. This object is available in API version 24.0 and later.

[QuickTextUsage](#)

Represents the usage of quick text on a record, including which quick text was used, who used it, and how they used it. Quick text is a snippet of text that allows users to send a quick response to a customer. This object is available in API version 47.0 and later.

[Quote](#)

Represents a quote, which is a record showing proposed prices for products and services. Available in API version 18.0 and later.

[QuoteAction](#)

Indicates the type of sales transaction that's being quoted; for example, a renewal sale. This object is available in API version 59.0 and later.

[QuoteAdjustmentGroup](#)

Group containing a set of adjustments applied to a quote. This object is available in API version 58.0 and later.

[QuoteDocument](#)

Represents a quote in document format. Available in API version 18.0 and later.

[QuoteLineGroup](#)

Stores the group information for line items in a quote. It also stores the aggregated line field information (subtotal). It contains a parent-child relationship to quote. This object is available in API version 61.0 and later.

[QuoteLineItem](#)

Represents a quote line item, which is a member of the list of Product2 products associated with a quote, along with other information about those line items on that quote. Available in API version 18.0 and later.

[QuoteLineItemRecipient](#)

Represents a site, employee, or other entity for which services are being quoted. This could include details such as the recipient's name, contact information, associated site or location, and any specific requirements or preferences for the quoted services. This object is available in API version 62.0 and later.

[QuoteLinePriceAdjustment](#)

Indicates the calculated price adjustment that is applied to the quote line, for example, a calculated volume discount or the prorated value of a manual discount. Use the quote line price adjustment to inform potential customers about the type, value, and total amount of their discounts. This object is available in API version 56.0 and later.

[QuoteLineRelationship](#)

Describes the relationship between quote line items, such as items in a bundle. When you create a QuoteLineRelationship object, it's immutable: it can't be edited or removed. This object is available in API version 58.0 and later.

[QuoteItemTaxItem](#)

The tax that is applied to a quote line item. This object is available in API version 55.0 and later.

[QuoteLineWorkSource](#)

Represents an association between a quote and work sources, such as assets, quote line items, order products, or work type groups. This object is available in API version 63.0 and later.

Standard Objects

[QuoteRecipientGroup](#)

Represents a recipient group for which offers or products with the same configuration are being added. This also includes reusing these groups to add or remove recipients. This object is available in API version 64.0 and later.

[QuoteRecipientGroupMember](#)

Represents a junction between a quote line item recipient and a quote recipient group. This object is available in API version 64.0 and later.

[RecentFieldChange](#)

Use this virtual object to see how an opportunity has changed in the past seven days. Learn the previous value of a field, who made the change, and when the change was made. This object is available in API version 52.0 and later.

[RecentlyViewed](#)

Represents records or list views that the current user has recently viewed or referenced (by viewing a related record). List views are available in API version 29.0 and later.

[Recommendation](#)

Represents the recommendations surfaced as offers and actions for Einstein Next Best Action. This object is available in API version 45.0 and later.

[RecommendationResponse](#)

Represents the user responses to a presented offer or recommendation for Einstein Next Best Action. This object is available in API version 51.0 and later.

[RecordAction](#)

Represents a relationship between a record and an action, such as a flow. Create a RecordAction for every action that you want to associate with a particular record. Available in API version 42.0 and later.

[RecordActionHistory](#)

Represents the lifecycle of a RecordAction as it goes through different states. Available in API version 44.0 and later.

[RecordsetFilterCriteria](#)

Represents a set of filters that can be used to match service appointments or assets based on your criteria fields. For example, you can create recordset filter criteria so that only service appointments that satisfy the filter criteria are matched to the filtered shifts, and likewise only maintenance work rules that satisfy your criteria are matched to assets. This object is available in API version 50.0 and later. Assets and maintenance work rules are available in API version 52.0 and later.

[RecordsetFilterCriteriaRule](#)

Represents a rule using fields from the designated source object to create filters on the filtered, or target, object. RecordsetFilterCriteriaRule is associated with the RecordsetFilterCriteria object. This object is available in API version 50.0 and later.

[RecordsetFiltrCritMonitor](#)

Monitors whether the value of an asset attribute is within the threshold of a recordset filter criteria (RFC). You can monitor one or more RFCs for an Asset. This object is available in API version 57.0 and later.

[RecordType](#)

Represents a record type.

[RecordTypeLocalization](#)

Represents the translated value of a label for a record type when the Translation Workbench is enabled for your organization.

[RecordVisibility \(Pilot\)](#)

Represents the visibility attributes that determine a record's read access. This object is read only and is available in API version 46.0 and later.

Standard Objects

[RedirectWhitelistUrl](#)

Represents a trusted URL for external user redirections. Redirections to a different Salesforce org, including its publicly served pages and content, are allowed from your Salesforce org only when the URL is a [RedirectWhitelistUrl](#). For non-Salesforce URLs, a session setting controls whether redirections from pages and components built in Salesforce Classic are restricted to [RedirectWhitelistUrl](#) objects. Except for cross-org redirections, you can't restrict redirections that originate from pages and components built with Lightning Experience. This object is available in API version 48.0 and later.

[Refund](#)

Represents a refund made against a payment. This object is available in API version 48.0 and later.

[RefundLinePayment](#)

A refund line that has been applied to a payment. This object is available in API version 48.0 and later.

[RegisteredExternalService](#)

Represents a registered external service used for checkout integrations by data integrators. This object is available in API version 49.0 and later.

[RelatedListColumnDefinition](#)

Represents information about a column in a related list. A related list specifies a set of records for a related object, based on specific criteria. This object is available in API version 55.0 and later.

[RelatedListDefinition](#)

Represents information about a related list. A related list specifies a set of records for a related object, based on specific criteria. This object is available in API version 55.0 and later.

[RemoteKeyCalloutEvent](#)

The documentation has moved to [RemoteKeyCalloutEvent](#) in the *Platform Events Developer Guide*.

[Reply](#)

Represents a reply that a user has submitted to a question in an answers zone.

[ReplyEmailSettings](#)

Represents a reply mail management configuration, which is used to configure emails that are received by an email sending domain. This object is available in API version 62.0 and later.

[ReplyReportAbuse](#)

Represents a user-reported abuse on a Reply in a Chatter Answers zone. This object is available in API version 24.0 and later.

[ReplyText](#)

A text reply generated by Einstein Reply Recommendations that is based on closed chat transcripts. Admins review replies and publish them to quick text, editing them as needed. Einstein recommends relevant published replies to support agents in the Lightning Service Console, and agents can insert replies into chats or messaging sessions. This object is available in API version 49.0 and later.

[Report](#)

Represents a report, a set of data that meets certain criteria, displayed in an organized way. Access is read-only. This object is available in API version 20.0 and later.

[ReportEventLog](#)

Report event logs contain information about what happened when a user ran a report. This event type includes all activity that's in the Report Export event type, and additional information. For example, it has user activity for reports exported as both Formatted Report and Details Only output. This object is available in API version 61.0 and later.

Standard Objects

[ReportExportEventLog](#)

Report Export events contain details about reports that a user exported. For example, this event type captures when a user exports a report as Details Only output. But it doesn't capture reports that users export as Formatted Report or XLSX Detail output. For that data, see the Report event type. This object is available in API version 65.0 and later.

[ReportTag](#)

Associates a word or short phrase with a Report. This object is available in API version 20.0 and later.

[ReputationLevel](#)

Represents a reputation level defined for an Experience Cloud site. This object is available in API version 32.0 and later.

[ReputationLevelLocalization](#)

Represents the translated value of a reputation level. Reputation level localization only applies for reputation levels in Experience Cloud sites. This object is available in API version 35.0 and later.

[ReputationPointsRule](#)

Represents the reputation point rules for an Experience Cloud site. Each rule specifies an action that members can earn points from and the points associated with those actions in a particular site. This object is available in API version 32.0 and later.

[ResourceAbsence](#)

Represents a time period in which a service resource is unavailable to work in Field Service, Salesforce Scheduler, or Workforce Engagement. This object is available in API version 38.0 and later.

[ResourcePreference](#)

Represents an account's preference for a specified service resource on field service work.

[RestApiEventLog](#)

REST API event logs contain details about REST-specific requests. This object is available in API version 61.0 and later.

[RetentionStoreUsage](#)

Represents the total usage of the org's retention store measured at specific points in time. This object is available in API version 66.0 and later.

[ReturnOrder](#)

Represents the return or repair of inventory or products in Field Service, or the return of order products in Order Management. This object is available in API version 42.0 and later.

[ReturnOrderItemAdjustment](#)

Represents a price adjustment on a return order line item. This object is available in API version 50.0 and later.

[ReturnOrderItemTax](#)

Represents the tax on a return order line item or return order item adjustment. This object is available in API version 50.0 and later.

[ReturnOrderLineItem](#)

Represents a specific product that is returned or repaired as part of a return order in Field service, or a specific order item that is returned as part of a return order in Order Management. This object is available in API version 42.0 and later.

[ReturnOrderOwnerSharingRule](#)

Represents the rules for sharing a return order with user records other than the owner or anyone above the owner in the role hierarchy. This object is available in API version 42.0 and later.

[RevenueAsyncOperation](#)

Represents the status of an asynchronous process initiated by a REST request in Subscription Management. This object is available in API versions 57.0 to 59.0. Use AsyncOperationTracker instead of RevenueSyncOperation in API version 59.0 and later.

Standard Objects

[RevenueTransactionErrorLog](#)

Contains information about errors that occurred while processing a request. The error record persists until another error with the same category, primary record, and (optionally) related record occurs. This object is available in API version 55.0 and later.

[RpaFlowResultEvent](#)

Reserved for future use.

[RpaRobot](#)

Reserved for future use.

[RpaRobotAsgnMaintWindow](#)

Reserved for future use.

[RpaRobotAsgnSessionInf](#)

Reserved for future use.

[RpaRobotDefinition](#)

Reserved for future use.

[RpaRobotMaintWindow](#)

Reserved for future use.

[RpaRobotMaintWindowDef](#)

Reserved for future use.

[RpaRobotPool](#)

Reserved for future use.

[RpaRobotPoolAsgnRobot](#)

Reserved for future use.

[RpaRobotPoolDefinition](#)

Reserved for future use.

[RpaRobotPoolFlowAsgn](#)

Reserved for future use.

[RpaRobotSessionInfo](#)

Reserved for future use.

[RpaRobotSessionInfoDef](#)

Reserved for future use.

[RuleTerritory2Association](#)

Represents a record-assignment rule and its association to an object, such as Account. Available if Sales Territories has been enabled.

[SalesAIScoreCycle](#)

Represents the cycle type and ID used to score records. This object is available in API version 47.0 and later.

[SalesAIScoreModelFactor](#)

Represents the factors that Sales Cloud Einstein uses to build a scoring model. Scoring models are used by features, such as Opportunity Scoring, to score individual records. This object is available in API version 47.0 and later.

[SalesforceLoginAsEventLog](#)

Salesforce LoginAs Event provides details about the Salesforce User's login into Customer Org as Customer's authorized user. This object is available in API version 65.0 and later.

Standard Objects

[SalesChannel](#)

Represents the origin of an order. For example, a web storefront, physical store, marketplace, or mobile app. If you integrate Salesforce Order Management with Salesforce B2C Commerce, set up a SalesChannel corresponding to each Site in your B2C Commerce implementation. This object is available in API version 48.0 and later.

[SalesforceContract](#)

Read-only virtual object used in the Your Account App. Represents contract information related to your organization's Salesforce subscription.

[SalesforceInvoice](#)

Read-only virtual object used in the Your Account App. Represents information about your organization's invoices with Salesforce.

[SalesforcePayment](#)

Read-only virtual object used in the Your Account App. Represents information about payments related to your organization's Salesforce invoice.

[SalesforceQuote](#)

Read-only virtual object used in the Your Account App. Represents information about your organization's quotes with Salesforce.

[SalesStoreCatalog](#)

Represents the catalog associated with a store. This object is available in API version 49.0 and later.

[SalesTransactionItemShape](#)

Defines the business logic for a sales transaction shape item, for example, an item in an order. This object is available in API version 57.0 and later.

[SalesTransactionShape](#)

Defines the business logic for a sales transaction; for example, an order, a quote, or a cart. This object is available in API version 57.0 and later.

[SalesTransactionType](#)

Represents the type of sales transaction, such as an initial, renewal, or amendment sale, and its related pricing configuration.. This object is available in API version 61.0 and later.

[SalesTrxnItemRelationShape](#)

Describes the relationship between sales transaction shape items; for example, a bundle or set. This object is available in API version 57.0 and later.

[SalesTrxnItemRelationship](#)

Describes the relationship between sales transaction items; for example, a bundle or set. This object interface is available in API version 58.0 and later.

[SalesWorkQueueSettings](#)

Represents settings used to customize work queue options for third-party scoring. Third-party scoring enables custom number fields on person accounts, contacts, and leads. You must be a Sales Engagement customer to update this object. Previously, you could only use the Einstein Intelligence Score for third-party scoring. Available starting in Version 47.0.

[SandboxStatusEventLog](#)

SandboxStatusEventLog stores details about Sandbox copies. This object is available in API version 62.0 and later.

[SamlSsoConfig](#)

Represents a SAML Single Sign-On configuration. This object is available in API version 32.0 and later.

[SavedPaymentMethod](#)

Represents a payment method saved by an authenticated customer. This object is available in API version 58.0 and later.

Standard Objects

[SavedPaymentMethodEvent](#)

Represents a saved payment method platform event. Subscribe to these events so you can listen and respond to them when they're published. For example, create a Salesforce Flow that is triggered when one of these events is published. This object is available in API version 59.0 and later.

[SchedulingAdherenceDetail](#)

Represents the breakdown of daily shift adherence data by agent status. This object is available in API version 54.0 and later.

[SchedulingAdherenceSummary](#)

Represents daily shift adherence data for a service resource in a service territory and job profile on a specific date. This object is available in API version 54.0 and later.

[SchedulingConstraint](#)

Represents scheduling constraints on each service resource. This object is available in API version 50.0 and later.

[SchedulingObjective](#)

Represents business goals that the scheduling tools consider. This object is available in API version 53.0 and later.

[SchedulingRule](#)

Represents scheduling rules that are hard constraints in the scheduling logic engine. This object is available in API version 52.0 and later.

[SchedulingRuleParameter](#)

Represents scheduling rule parameters associated with a scheduling rule. This object is available in API version 52.0 and later.

[Scontrol](#)

A custom s-control, which is custom content that is hosted by the system but executed by the client application.

[ScontrolLocalization](#)

The translated value of the field label for an s-control.

[Scorecard](#)

Use scorecards to measure partner performance and establish benchmarks for channel programs within Experience Cloud. Display any report summary results that your channel account manager or executive team wants to see. This object is available in API version 40.0 and later.

[ScorecardAssociation](#)

Represents a connection between a specific scorecard and the associated account, channel program, or channel program level. This object is available in API version 41.0 and later.

[ScorecardMetric](#)

Stores information about a Salesforce report that is run and summarized to get a single value. The stored value is added as a metric to the related Scorecard object. This object is available in API version 40.0 and later.

[ScoreIntelligence](#)

For internal use only.

[ScratchOrgInfo](#)

Represents a scratch org and its audit log. Use this object to create a scratch org and keep a log of its creation and deletion. This object is available in API version 41.0 and later.

[SearchActivity](#)

Represents search activity on a Knowledge article. Also known as KnowledgeSearchActivity. This object is available in API version 38.0 and later.

Standard Objects

[SearchClickEventLog](#)

Search Click Event Log contains details about the user's interaction with the search results. This object is available in API version 61.0 and later.

[SearchEventLog](#)

Search Event Log provides details about the user's search query. This object is available in API version 61.0 and later.

[SearchLayout](#)

Represents a search layout defined for an object. This object is available in API version 35.0 and later.

[SearchPromotionRule](#)

Represents a promoted search term, which is one or more keywords that you associate with a Salesforce Knowledge article. When a user's search query includes these keywords, the associated article is returned first in search results. This object is available in API version 31.0 and later.

[SecurityCustomBaseline](#)

Provides the ability to read, create, and delete user-defined custom security baselines, which define an org's security standards. This object is available in API version 39.0 and later.

[SelfServiceUser](#)

Represents a Contact who has been enabled to use your organization's Self-Service portal, where he or she can obtain online support.

[Seller](#)

Represents the seller role of an individual with respect to a particular company or organization. This object is available in API version 53.0 and later.

[SenderEmailAddress](#)

Represents a From address in a marketing email. This object is available in API version 63.0 and later.

[ServiceAppointment](#)

Represents an appointment to complete work for a customer in Field Service, Lightning Scheduler, Intelligent Appointment Management, and Virtual Care. This object is available in API version 38.0 and later.

[ServiceAppointmentStatus](#)

Represents a possible status of a service appointment in field service.

[ServiceChannel](#)

Represents a channel of work items that are received from your organization—for example, cases, chats, or leads. This object is available in API version 32.0 and later.

[ServiceChannelFieldPriority](#)

Represents a secondary routing priority field-value mapping. This object is available in API version 47.0 and later.

[ServiceChannelStatus](#)

Represents the status that's associated with a specific service channel. This object is available in API version 32.0 and later.

[ServiceChannelStatusField](#)

Represents the values that you use to indicate completed and in-progress work item status for the status field in the Status-Based Capacity routing model. This object is available in API version 49.0 and later.

[ServiceContract](#)

Represents a customer support contract (business agreement). This object is available in API version 18.0 and later.

[ServiceContractOwnerSharingRule](#)

Represents the rules for sharing a ServiceContract (customer service agreement) with users other than the owner. This object is available in API version 18.0 and later.

Standard Objects

[ServiceCrew](#)

Represents a group of service resources who can be assigned to service appointments as a unit.

[ServiceCrewMember](#)

Represents a technician service resource that belongs to a service crew.

[ServiceCrewOwnerSharingRule](#)

Represents the rules for sharing a service crew with user records other than the owner or anyone above the owner in the role hierarchy.

[ServicePresenceStatus](#)

Represents a presence status that can be assigned to a service channel. This object is available in API version 32.0 and later.

[ServiceReport](#)

Represents a report that summarizes a work order, work order line item, or service appointment.

[ServiceReportLayout](#)

Represents a service report template in field service.

[ServiceRequest](#)

Represents a formal request from a user for something to be provided, such as access, information, hardware, or software. This object manages the lifecycle of these tasks, which are typically low-risk, and can be fulfilled through a defined, repeatable process. For example, a Service Request can be created for an employee requesting a new laptop or a student needing a transcript. This object is available in API version 66.0 and later.

[ServiceResource](#)

Represents a service technician or service crew in Field Service and Salesforce Scheduler, or an agent in Workforce Engagement. This object is available in API version 38.0 and later.

[ServiceResourceCapacity](#)

Represents the maximum number of scheduled hours or number of service appointments that a capacity-based service resource can complete within a specific time period. This object is available in API version 38.0 and later.

[ServiceResourceCapacityHistory](#)

Represents the history of changes made to tracked fields on a service resource capacity record. This object is available in API version 38.0 and later.

[ServiceResourceDataTranslation](#)

Represents the translated values of the data stored within a [ServiceResource](#) record's fields. This object is available in API version 54.0 and later.

[ServiceResourceOwnerSharingRule](#)

Represents the rules for sharing a service resource with user records other than the owner or anyone above the owner in the role hierarchy. This object is available in API version 38.0 and later.

[ServiceResourcePreference](#)

Represents the service resource scheduling preferences that are considered as a business objective in the scheduling logic engine. This object is available in API version 52.0 and later.

[ServiceResourceSkill](#)

Represents a skill that a service resource possesses in Field Service and Lightning Scheduler. This object is available in API version 38.0 and later.

[ServiceSetupProvisioning](#)

Represents a task completed by the Service Setup Assistant. This object is available in API version 52.0 and later.

Standard Objects

[ServiceTerritory](#)

Represents a geographic or functional region in which work can be performed in Field Service, Salesforce Scheduler, or Workforce Engagement. This object is available in API version 38.0 and later.

[ServiceTerritoryDataTranslation](#)

Represents the translated values of the data stored within a [ServiceTerritory](#) record's fields. This object is available in API version 54.0 and later.

[ServiceTerritoryLocation](#)

Represents a location associated with a particular service territory in field service.

[ServiceTerritoryMember](#)

Represents a service resource who can be assigned in a service territory in Field Service, Salesforce Scheduler, or Workforce Engagement. This object is available in API version 38.0 and later.

[ServiceTerritoryWorkType](#)

Represents the relationship between a ServiceTerritory object and a WorkType object for Salesforce Scheduler appointments. This object is available in API version 45.0 and later.

[SessionPermSetActivation](#)

The SessionPermSetActivation object represents a permission set assignment activated during an individual user session. When a SessionPermSetActivation object is inserted into a permission set, an activation event fires, allowing the permission settings to apply to the user's specific session. This object is available in API versions 37.0 and later.

[SetupAssistantStep](#)

For internal use only.

[SetupAuditTrail](#)

Represents changes you or other admins made in your org's Setup area for at least the last 180 days. This object is available in API version 15.0 and later.

[SetupEntityAccess](#)

Represents the enabled setup entity access settings (such as for Apex classes) for the parent PermissionSet. This object is available in API version 25.0 and later.

[ShapeRepresentation](#)

Contains information about the shape of an org. The shape of an org includes licenses and limits information. You can easily create scratch orgs based on a source org's shape. This object is available in API version 50.0 and later.

[SharingRecordCollection](#)

Represents a collection of records. This object is available in API version 51.0 and later.

[SharingRecordCollectionItem](#)

Represents a single record in a collection of records. This object is available in API version 51.0 and later.

[SharingRecordCollectionMember](#)

Represents a user with access to a collection of records. This object is available in API version 51.0 and later.

[Shift](#)

Represents a shift for service resource scheduling. Available in API versions 46.0 and later.

[ShiftHistory](#)

Represents the history of changes made to tracked fields on a time sheet. Available in API versions 46.0 and later.

[ShiftOwnerSharingRule](#)

Represents the rules for sharing a shift with user records other than the owner or anyone above the owner in the role hierarchy. Available in API versions 46.0 and later.

Standard Objects

[ShiftPattern](#)

Represents a pattern of templates for creating shifts. This object is available in API version 51.0 and later.

[ShiftPatternEntry](#)

ShiftPatternEntry links a shift template to a shift pattern. This object is available in API version 51.0 and later.

[ShiftSegment](#)

Represents a scheduled activity within a shift. This object is available in API version 55.0 and later.

[ShiftSegmentType](#)

Represents a type of activity scheduled within a shift. This object is available in API version 55.0 and later.

[ShiftShare](#)

Represents a sharing entry on a field service shift. Available in API versions 46.0 and later.

[ShiftStatus](#)

Represents a shift, such as Tentative, Published, or Confirmed. Available in API versions 46.0 and later.

[ShiftTemplate](#)

Represents a template for creating shifts. This object is available in API version 51.0 and later.

[Shipment](#)

Represents the transport of inventory in field service or a shipment of order items in Order Management.

[ShipmentItem](#)

Represents an order item included in a shipment. This object is available in API version 51.0 and later.

[ShippingCarrier](#)

Shipping company or carrier responsible for transporting goods or packages. Examples include UPS, FedEx, and USPS. This object is available in API version 61.0 and later.

[ShippingCarrierMethod](#)

Shipping service provided by a shipping carrier. Examples include Ground, 2Day, and NextDay. Service depends on the range of transit times available for each carrier. This object is available in API version 61.0 and later.

[ShippingConfigurationSet](#)

Shipping configuration for a set of products in a store. This object is available in API version 59.0 and later.

[ShippingConfigSetProduct](#)

Represents a product associated with a shipping configuration. This object is available in API version 64.0 and later.

[ShippingRateArea](#)

A designated geographical area that's available for shipping. This object is available in API version 59.0 and later.

[ShippingRateGroup](#)

Available shipping rates based on shipping destination. This object is available in API version 59.0 and later.

[SignupRequest](#)

Represents a request for a new sign-up. SignupRequest isn't supported in sandbox instances and will result in an error. This object is available in API version 27.0 and later.

[Site](#)

Represents a public website that is integrated with an org. This object is available in API version 16.0 and later.

[SiteDetail](#)

Represents the details of a Salesforce site or Experience Cloud site. Available in API Version 38.0 and later.

Standard Objects

[SiteDomain](#)

SiteDomain is a read-only object, and a one-to-many replacement for the Site.TopLevelDomain field. This object is available in API version 21.0, and has been deprecated as of API version 26.0. In API version 26.0 and later, use the [Domain](#) and [DomainSite](#) objects instead.

[SiteEventLog](#)

SiteEventLog stores details of Site.com requests. Requests can originate from the browser (UI). This object is available in API version 62.0 and later.

[SiteHistory](#)

Represents the history of changes to the values in the fields of a site. This object is generally available in API version 18.0 and later.

[SiteframeWhitelistUrl](#)

Represents a list of external domains that you allow to frame your Salesforce site or Experience Cloud site pages. This object is available in API version 44.0 and later.

[SiteRedirectMapping](#)

Represents a site redirect from an external site to an Experience Cloud site. This object is available in API version 52.0 and later.

[Skill](#)

Represents a category or group of Chat users or service resources in Field Service or Workforce Engagement. This object is available in API version 24.0 and later.

[SkillLevelDefinition](#)

Represents a skill which can be acquired by completing enablement site (myTrailhead) modules. This object is available in API version 51.0 and later.

[SkillLevelProgress](#)

Represents training progress for a given user. This object is available in API version 51.0 and later.

[SkillProfile](#)

Represents a join between Skill and Profile. This object is available in API version 24.0 and later.

[SkillRequirement](#)

Represents a skill that is required to complete a particular task in Field Service, Omni-Channel, Salesforce Scheduler, or Workforce Engagement. Skill requirements can be added to pending service routing objects in Omni-Channel. They can be added to work types, work orders, and work order line items in Field Service and Lightning Scheduler. And they can be added to job profiles in Workforce Engagement. This object is available in API version 38.0 and later. You also can add skill requirements to work items in Omni-Channel skills-based routing using API version 42.0 and later.

[SkillUser](#)

Represents a join between Skill and User. This object is available in API version 24.0 and later.

[SlackChannelRelatedRecord](#)

Represents the related record mapping between a Slack channel and a Salesforce record that's made when you create a Salesforce channel. This object is available in API version 65.0 and later.

[SlaProcess](#)

Represents an entitlement process associated with an Entitlement. This object is available in API version 19.0 and later.

[Snippet](#)

Represents a snippet, which is a container for rich text that can be reused across Account Engagement emails and email templates. This object is available in API version 47.0 and later.

Standard Objects

[SnippetAssignment](#)

Represents a relationship between a snippet and a campaign. Assignments are required to use snippet content in Account Engagement emails and email templates. A snippet can be assigned to more than one campaign. This object is available in API version 47.0 and later.

[SoapApiEventLog](#)

SOAP API events contain details about your org's SOAP API request activity. This object is available in API version 61.0 and later.

[SocialPersona](#)

Represents a snapshot of a contact's profile on a social network such as Facebook or Twitter. This object is available in API version 22.0 and later.

[SocialPost](#)

Represents a snapshot of a post on a social network such as a Facebook or Twitter. This object is available in API version 23.0 and later.

[Solution](#)

Represents a detailed description of a customer issue and the resolution of that issue.

[SolutionStatus](#)

Represents the status of a Solution, such as Draft, Reviewed, and so on.

[SolutionTag](#)

Associates a word or short phrase with a Solution.

[SOSDeployment](#)

Represents the general settings for deploying SOS video call capability in a native mobile application. This object is available in API version 34.0 and later.

[SOSSession](#)

This object is automatically created for each SOS session and stores information about the session. This object is available in API versions 34.0 and later.

[SOSSessionActivity](#)

Captures information about specific events that occur during an SOS video call, such as when an SOS call begins or ends. This object is available in API version 34.0 and later.

[StagedEmail](#)

For internal use only.

[StagedInviteeEmail](#)

Represents an email address that is included on a calendar event but that doesn't match an existing user, contact, or lead record. This object is available in API version 66.0 and later.

[StagedUnmtchdEmailAddr](#)

Represents data about an email address identified by Einstein Activity Capture that doesn't match to an existing user, contact, or lead record. These addresses are only stored temporarily. Related to [StagedUnmtchdEmailAddrRela](#), which represents data about the email message or calendar event activity associated with an unmatched email. This object is available in API version 66.0 and later.

[StagedUnmtchdEmailAddrRela](#)

Represents data about the message or event activity associated with an email address that Einstein Activity Capture can't match with an existing user, contact, or lead record. Related to [StagedUnmtchdEmailAddr](#), which represents data about the unmatched email address. This object is available in API version 66.0 and later.

[Stamp](#)

Represents a User Specialty. This object is available in API version 39.0 and later.

Standard Objects

[StampAssignment](#)

Represents assignment of a User Specialty to a user. This object is available in API version 39.0 and later.

[StandardInvokableActionType](#)

Represents a collection of fields to set up granular user permissions for access to a standard invocable action in Flow Builder. This object is available in API version 60.0 and later.

[StandardShippingRate](#)

Standard shipping rate for a store. This object is available in API version 59.0 and later.

[StaticResource](#)

Represents a static resource that can be used in Visualforce markup.

[StoreIntegratedService](#)

Represents an association between an integration and a store. This object is available in API version 49.0 and later.

[StreamingChannel](#)

Represents a channel that is the basis for notifying listeners of generic Streaming API events. This object is available in API version 29.0 and later.

[Salesforce Surveys Object Model](#)

Learn about how Salesforce Surveys objects relate to one another in Salesforce.

[Survey](#)

Represents a survey.

[SurveyEmailBranding](#)

Represents the configuration settings for invitation emails sent to survey participants for a particular survey.

[SurveyEngagementContext](#)

Represents the context based on which a survey invitation was sent or a survey response was received. This object is available in API version 49.0 and later.

[SurveyInvitation](#)

Represents the invitation sent to a participant to complete the survey.

[SurveyPage](#)

Represents a page, such as the title page or a question page, in a survey.

[SurveyQuestion](#)

Represents a question in a survey.

[SurveyQuestionChoice](#)

Represents an answer choice that a participant can select for a survey question.

[SurveyQuestionResponse](#)

Represents a participant's answer to a specific question.

[SurveyQuestionScore](#)

Represents the aggregate of responses for the following question types: date, multiple choice, picklist, radio, ranking, rating, scoring, slider, and [Net Promoter Score® \(NPS®\)](#).

[SurveyResponse](#)

Represents information about a participant's response to a survey, such as the status of the response, the participant's location, and when the survey was completed.

[SurveySubject](#)

Represents a relationship between a survey and another object, such as an account or a case.

Standard Objects

[SurveyVersion](#)

Represents a version of a survey.

[SurveyVersionAddlInfo](#)

Represents additional information about a survey version. This information defines the default settings of a survey version. This object is available in API version 49.0 and later.

[SvcCatalogCategory](#)

Represents a group of Service Catalog items by functional area. This object is available in API version 58.0 and later.

[SvcCatalogCategoryItem](#)

Represents an association between a Service Catalog item and category. Service catalog items can be grouped into categories. This object is available in API version 58.0 and later.

[SvcCatalogFilterCriteria](#)

Represents an eligibility rule that determines if a Service Catalog user has access to a catalog item. This object is available in API version 60.0 and later.

[SvcCatalogItemDef](#)

Represents a service catalog item that can be requested by a service catalog user. This object is available in API version 53.0 and later.

[SvcCatalogRequest](#)

Represents a request made by a user using the Service Catalog. Catalog builders use this object to report on Service Catalog activity. This object is available in API version 53.0 and later.

[SvcCatalogReqRelatedItem](#)

Represents an item related to a Service Catalog Request. This object is available in API version 53.0 and later.

[Swarm](#)

Represents a team of agents, Salesforce users, or Slack users in a Slack channel or thread dedicated to solving a problem. This problem can be related to a support case, incident, sales opportunity, or change request. This object is available in API version 55.0 and later.

[SwarmMember](#)

Represents a Salesforce member, such as an agent, of a swarm. This object is available in API version 55.0 and later.

[TabDefinition](#)

Represents a custom tab. Returns only the tabs that the current user has access to. This object is available in API version 43.0 and later.

[TagDefinition](#)

Defines the attributes of child Tag objects.

[Task](#)

Represents a business activity such as making a phone call or other to-do items. In the user interface, Task and Event records are collectively referred to as activities.

[TaskPriority](#)

Represents the importance or urgency of a task, such as High, Normal, or Low.

[TaskRelation](#)

Represents the relationship between a task and a lead, contacts, and other objects related to the task. If Shared Activities is enabled, this object doesn't support triggers, workflow, or data validation rules. This object is available in API version 24.0 and later.

[TaskStatus](#)

Represents the status of a task, such as Not Started, Completed, or Closed.

Standard Objects

[TaskTag](#)

Associates a word or short phrase with a task .

[TaskWhoRelation](#)

Represents the relationship between a task and a lead or contacts. This object is available in API version 29.0 and later.

[TaxEngine](#)

A tax engine represents both an instance of a tax engine provider as well as the merchant credentials for that specific instance. When Subscription Management calculates tax on an order item, it sends a request through Subscription Management Tax Calculation API to an external tax engine. The Salesforce tax engine record contains information passed to the external tax engine, such as This object is available in API version 55.0 and later.

[TaxEngineInteractionLog](#)

A record of a communication with an external tax engine following a tax calculation request. This object is available in API version 55.0 and later.

[TaxEngineProvider](#)

Represents general information about a service that manages a tax engine, such as the ID of the tax adapter Apex class in Salesforce, and the engine's namespace prefix. Tax engine providers have a one-to-many relationship with tax engines, where the tax engine record represents a specific configuration of a tax engine that can be assigned to multiple order items. This object is available in API version 55.0 and later.

[TaxGeoConfig](#)

Represents a tax configuration associated with a GeoCountry. This object is available in API version 57.0 and later.

[TaxPolicy](#)

A tax policy contains a group of tax treatments, where each treatment represents parameters to determine how a particular product is taxed for a transaction line item. Tax policies are related to products, which pass the policy on to the resulting order items. When you activate an order, Subscription Management assigns a tax treatment to each order item based on the tax policy's DefaultTaxTreatmentId, then uses the tax treatment to calculate tax. This object is available in API version 55.0 and later.

[TaxRate](#)

Represents a tax rate for a tax code and country. This object is available in API version 56.0 and later.

[TaxTreatment](#)

A tax treatment contains details about how Salesforce and external engines calculate taxes, and the tax engine to use for tax calculation. The IsTaxable field determines whether tax is calculated for the product in the transaction. The tax code, tax engine, and product code are sent via API to the external tax calculation service. When you invoice an order item that has a tax treatment, the invoice line inherits the tax treatment from the order item's related billing schedule. The invoice line's TaxCode field is populated based on the code that the tax engine used for calculation. This object is available in API version 55.0 and later.

[TenantScrAIPrmptInjection](#)

Stores generative AI prompt injection data. This object is available in API version 65.0 and later.

[TenantSecret](#)

This object stores an encrypted organization-specific key fragment that's used with the primary secret (KDF seed) to produce org-specific data encryption keys. This object is available in API version 34.0 and later.

[TenantSecurityAIGtwyUsage](#)

Stores Einstein generative AI gateway usage data. This object is available in API version 65.0 and later.

[TenantSecurityAlertRuleSelectedTenant](#)

Stores information about a Security Center alert rule for tenants. This object is available for Security Center subscribers in API version 55.0 and later.

Standard Objects

[TenantSecurityApiAnomaly](#)

Stores detected anomalies in how users typically make API calls. For more information, see [Threat Detection](#). This object is available to Security Center subscribers in API version 53.0 and later.

[TenantSecurityCertificate](#)

Stores metric details related to public key certificate information. The certificate binds the public key to the identity of an entity. This object is available in API version 63.0 and later.

[TenantSecurityConnectedApp](#)

Stores the details for a connected app that was added to or removed from a Security Center tenant. This object is available to Security Center subscribers in API version 53.0 and later.

[TenantSecurityConfigAgent](#)

Stores metric details related to implemented Agentforce Agents. This object is available in API version 65.0 and later.

[TenantSecurityCredentialStuffing](#)

Stores when a user successfully logs in to Salesforce during an identified credential stuffing attack. For more information, see [Threat Detection](#). This object is available to Security Center subscribers in API version 53.0 and later.

[TenantSecurityCustomMetricSetup](#)

Represents the configuration for a custom metric within Security Center. This object is available in API version 61.0 and later.

[TenantSecurityCustomMetricDetail](#)

Stores TenantSecurityCustomMetricStat drill down details. This object is available in API version 62.0 and later.

[TenantSecurityCustomMetricStat](#)

Represents custom metric data within Security Center. This object is available in API version 61.0 and later.

[TenantSecurityEncryptedField](#)

Represents fields encrypted under your Shield Platform Encryption policy. This object is available in API version 61.0 and later.

[TenantSecurityGuestUserAnomaly](#)

Represents metric details for guest user anomaly events detected by Threat Detection. This object is available in API version 60.0 and later.

[TenantSecurityEncryptionPolicy](#)

Stores tenant encryption policy status. This object is available in API version 58.0 and later.

[TenantSecurityFeature](#)

Stores org features across all tenants in Security Center. This object is available in API version 57.0 and later.

[TenantSecurityHealthCheckBaselineTrend](#)

Stores metric details related to Health Check baseline settings. The Health Check detail page in Security Center displays scores and settings for all your tenants in one place. Use this object to get details about which metrics are collected and for which tenants, and changes made to the Health Check baseline. This object is available to Security Center subscribers in API version 54.0 and later.

[TenantSecurityHealthCheckDetail](#)

Stores the details of Health Check scores for a connected tenant. The Health Check detail page in Security Center displays scores and settings for all your tenants in one place. Use this object to get settings and risks per tenant on a selected date. This object is available to Security Center subscribers in API version 53.0 and later.

[TenantSecurityHealthCheckTrend](#)

Stores the history of Security Health Check scores for a connected tenant within Security Center. Health Check in Security Center displays Health Check scores and the average risk settings for all your tenants in one place. This object belongs to the parent tenant and stores Health Check data pushed from child tenants. This object is available for Security Center subscribers in API version 53.0 and later.

Standard Objects

[TenantSecurityLicense](#)

Stores license usage information within Security Center. This object is available in API version 59.0 and later.

[TenantSecurityLogin](#)

Stores the login details of a single user to a tenant, grouped by date and type. You can query this object to find out how many times the user logged in to a specific tenant using a specific login type (for example, username/password or SSO). This object is available to Security Center subscribers in API version 53.0 and later.

[TenantSecurityLoginIpRangeTrend](#)

Stores details of changes related to login IP ranges in Security Center. This object is available in API version 59.0 and later.

[TenantSecurityMobilePolicyTrend](#)

Stores metrics related to changes in mobile security policies across all tenants in Security Center. This object is available to Security Center subscribers in API version 54.0 and later.

[TenantSecurityMonitorMetric](#)

Stores the daily count and daily count change for a metric within Security Center. This object is available to Security Center subscribers in API version 53.0 and later.

[TenantSecurityNotification](#)

Stores information about notifications that were triggered in Security Center as a function of the Alerts feature. For more information, see [Create Alerts for Security Changes](#). This object is available to Security Center subscribers in API version 54.0 and later.

[TenantSecurityNotificationRule](#)

Stores an alert configured in the Security Center Alerts feature to notify recipients of changes made to security settings. For more information, see [Create Alerts for Security Changes](#). This object is available to Security Center subscribers in API version 53.0 and later.

[TenantSecurityMetricDetailLink](#)

Represents the link between the metric count and metric drill down. This object is available in API version 48.0 and later.

[TenantSecurityPackage](#)

Stores details about managed and unmanaged packages that are added, updated, or removed from a tenant in Security Center. Use this object to identify whether new packages are installed, upgraded, or uninstalled from your connected tenants. This object is available to Security Center subscribers in API version 53.0 and later.

[TenantSecurityPolicy](#)

Stores security policies created and deployed in Security Center. For more information, see [Define and Deploy Security Policies](#). This object is available to Security Center subscribers in API version 54.0 and later.

[TenantSecurityPolicyDeployment](#)

Stores the status of deployments of a Security Center policy on a tenant. For more information, see [Define and Deploy Security Policies](#). This object is available to Security Center subscribers in API version 54.0 and later.

[TenantSecurityPolicySelectedTenant](#)

Stores the list of tenants selected for a Security Center policy. For more information, see [Define and Deploy Security Policies](#). This object is available to Security Center subscribers in API version 54.0 and later.

[TenantSecurityReportAnomaly](#)

Stores anomalies in how users run or export reports, including unsaved reports, as detected by Threat Detection. For more information, see [Threat Detection](#). This object is available to Security Center subscribers in API version 53.0 and later.

[TenantSecuritySessionHijacking](#)

Stores information about session hijacking events as detected by Threat Detection within connected tenants in Security Center. For more information, see [Threat Detection](#). This object is available for Security Center subscribers in API version 53.0 and later.

Standard Objects

[TenantSecurityTenantInfo](#)

Stores information on changes related to the tenant history. This object is available in API version 56.0 and later.

[TenantSecurityTransactionPolicyTrend](#)

Stores changes to the count of Transaction Security Policies for a connected tenant within Security Center. This object is available for Security Center subscribers in API version 55.0 and later.

[TenantSecurityTrigTransactionSecurityPol](#)

Stores metric details related to Transaction Security Policy triggering events. This object is available in API version 63.0 and later.

[TenantSecurityTrustedIpRangeTrend](#)

Stores details of changes related to trusted IP ranges in Security Center. This object is available for Security Center subscribers in API version 54.0 and later.

[TenantSecurityUserActivity](#)

Stores details related to how a user interacts with a tenant. Use this object to determine whether to reevaluate a user's access to your org for security purposes. You can check whether a user has never logged in, hasn't been active for 90 days, has a frozen account, or isn't using multi-factor authentication. This object is available to Security Center subscribers in API version 53.0 and later.

[TenantSecurityUserPerm](#)

Stores information on permissions assigned to a user. Use this object to see which tenants a user is assigned to. This object is available to Security Center subscribers in API version 53.0 and later.

[TenantUsageEntitlement](#)

Represents a data structure that contains information about the features or functionalities that a Salesforce org has access to. This object is available in API version 28.0 and later.

[Territory](#)

Represents a flexible collection of accounts and users where the users have at least read access to the accounts, regardless of who owns the accounts. Available if Sales Territories has been enabled. This object is available in API versions 7.0 to 52.0. Use Territory2 instead of Territory in API version 52.0 and later.

[TerritoryMgmtObjectConfig](#)

Represents territory management settings and defaults for a particular object. This object is available in API version 56.0 and later.

[Territory2](#)

Represents a sales territory. Available if Sales Territories has been enabled.

[Territory2AlignmentLog](#)

Represents the start and end status of a territory assignment rule run job. This object is available in API version 54.0 and later.

[Territory2Model](#)

Represents a territory model. Available if Sales Territories has been enabled.

[Territory2ModelHistory](#)

Represents the history of changes to the values in the fields on a territory model. Available if Sales Territories has been enabled.

[Territory2ObjectExclusion](#)

Represents the objects that aren't included in territory assignment rule runs, even when they meet assignment rule criteria. This object is available in API version 54.0 and later.

[Territory2ObjSharingConfig](#)

Represents the sharing access level of objects assigned to a particular territory. This object is available in API version 56.0 and later.

[Territory2Type](#)

Represents a category for territories (Territory2). Every Territory2 must have a Territory2Type. Available only if Sales Territories has been enabled for your organization.

Standard Objects

[TerritoryAdminAssignment](#)

Represents designated team members who can administer specific territories and their descendants. This object is available in API version 63.0 and later.

[TestSuiteMembership](#)

Associates an Apex class with an ApexTestSuite. This object is available in API version 36.0 and later.

[ThirdPartyAccountLink](#)

Represents the list of external users who authenticated using an authentication provider. This object is available in API version 32.0 and later.

[ThreatDetectionFeedback](#)

Represents feedback provided by a user about a Threat Detection event that occurred in your org. The feedback specifies whether the event was malicious, suspicious, not a threat, or unknown. Each ThreatDetectionFeedback object is associated with one of these Threat Detection storage events: ApiAnomalyEventStore, CredentialStuffingEventStore, ReportAnomalyEventStore, or SessionHijackingEventStore. This object is available in API version 49.0 and later.

[TimeSheet](#)

Represents a schedule of a service resource's time in Field Service or Workforce Engagement. This object is available in API v47.0 and later.

[TimeSheetEntry](#)

Represents a span of time that a service resource spends on a field service task. This object is available in API version 47.0 and later.

[TimeSlot](#)

Represents a period of time on a specified day of the week during which work can be performed in Field Service, Salesforce Scheduler, or Workforce Engagement. Operating hours consist of one or more time slots. This object is available in API version 38.0 and later.

[TimeSlotHistory](#)

Represents the history of changes made to tracked fields on a time slot. This object is available in API version 38.0 and later.

[TodayGoal](#)

Sets the quarterly sales goal on the performance chart. This object is available in API version 35.0 and later.

[Topic](#)

Represents a topic on a Chatter post or record. This object is available in API version 28.0 and later.

[TopicAssignment](#)

Represents the assignment of a topic to a specific feed item, record, or file. This object is available in API version 28.0 and later.

[TopicLocalization](#)

Represents the translated version of a topic name. Topic localization applies only to navigational and featured topics in Experience Cloud sites. This object is available in API version 33.0 and later.

[TopicUserEvent](#)

Represents an action (such as comment, post, like, or share) made by a user on a topic. This object is available in API version 42.0 and later.

[TopInsight](#)

For internal use only.

[TransactionSecurityPolicy](#)

Represents a transaction security policy definition.

[TransactionSecurityEventLog](#)

Transaction Security event logs contain details about policy execution. Legacy transaction security policy details are supported in API version 38.0 and later. Enhanced transaction security policy details are supported in API version 61.0 and later.

Standard Objects

[Translation](#)

The Translation object represents the languages enabled for translation in your Salesforce org. This object is available in API version 47.0 and later.

[TravelMode](#)

Represents a travel mode used for travel time calculations. The records include information about the type of transportation (such as Car or Walking), whether a vehicle can take toll roads, and whether a vehicle is transporting hazardous materials. This object is available in API version 54.0 and later.

[TwoFactorInfo](#)

Stores a user's secret for multi-factor operations. Use this object when customizing multi-factor authentication in your organization. (Note that multi-factor authentication was formerly called two-factor authentication.) This object is available in API version 32.0 and later.

[TwoFactorMethodsInfo](#)

Stores information about which identity verification methods a user has registered. This object is available in API version 37.0 and later.

[TwoFactorTempCode](#)

Stores information about a user's temporary verification code for confirming their identity when logging in. This object is available in API version 37.0 and later.

[UiAgentInteractionEventLog](#)

This log tracks client side interactions and events with the Agentforce panel. It is limited to Salesforce Lightning Experience, Salesforce Mobile, and Conversation Preview within Agentforce Builder. This object is available in API version 65.0 and later.

[UiFormulaCriterion](#)

Represents a filter that helps define component visibility on a Lightning page. This object is available in API version 47.0 and later.

[UiFormulaRule](#)

Represents a set of one or more filters that define the conditions under which a component displays on a Lightning page. This object is available in API version 47.0 and later.

[UiTelemetryNavTmEventLog](#)

UI Telemetry Navigation Timing events capture network performance metrics related to page navigation. The event extends from the [UI Telemetry Resource Timing Event](#) on page 2412 and includes requests initiated with either the [Fetch API](#) or the [XMLHttpRequest API](#). This object is available in API version 64.0 and later.

[UiTelemetryRsrcTmEventLog](#)

UI Telemetry Resource Timing events capture network performance metrics related to loading an application's resources. The event includes requests initiated with either the [Fetch API](#) or the [XMLHttpRequest API](#). This object is available in API version 64.0 and later.

[UndecidedEventRelation](#)

Represents event participants (invitees or attendees) with the status `Not Responded` for a given event. This object is available in API versions 29.0 and later.

[UnifiedActivity](#)

Represents an activity that is automatically captured from Einstein Activity Capture (EAC) or other activity data, such as calls, manually logged tasks, and emails. This object consists of fields common to all types of activity-related objects such as Event, Task, EmailMessage, VoiceCall, VideoCall, and so on. This object is available for reports and dashboards in the Winter '24 release and later.

[UnifiedActivityInsight](#)

Represents an insight related to a unified activity. This object is available for reports and dashboards in the Winter '24 release and later.

Standard Objects

[UnifiedActivityParticipant](#)

Represents a participant in an activity. For example, a participant in a voice call is someone who initiated the call or someone who received the call. This object is available for reports and dashboards in the Winter '24 release and later.

[UnifiedActivityRelation](#)

Represents a relationship between an activity and a related record that's a target or topic of the activity. For example, a related record can be an opportunity, account, and so on. This object is available for reports and dashboards in the Winter '24 release and later.

[UnifiedActivityInsightKeyword](#)

Represents a keyword in a communication that triggered the activity insight. This object is available for reports and dashboards in the Winter '24 release and later.

[UnifiedEmail](#)

Represents an email that was captured or synced from an EmailMessage or Task record. This object is available for reports and dashboards in the Winter '24 release and later.

[UnifiedEmailParticipant](#)

Represents a participant in an email. This object is available for reports and dashboards in the Winter '24 release and later.

[UnifiedMeeting](#)

Represents a meeting that was captured or synced from an Event record. This object is available for reports and dashboards in the Winter '24 release and later.

[UnifiedMeetingParticipant](#)

Represents a participant in a meeting. This object is available for reports and dashboards in the Winter '24 release and later.

[UnifiedTask](#)

Represents a business activity such as a to-do item. This object is available for reports and dashboards in the Winter '24 release and later.

[UnifiedTaskParticipant](#)

Represents a participant in a task. This object is available for reports and dashboards in the Winter '24 release and later.

[UnifiedVideoCall](#)

Represents a video call that is captured or synced from the VideoCall or Task record. This object is available for reports and dashboards in the Winter '24 release and later.

[UnifiedVideoCallParticipant](#)

Represents a participant in a video call. This object is available for reports and dashboards in the Winter '24 release and later.

[UnifiedVoiceCall](#)

Represents a voice call that is captured or synced from a VoiceCall or Task record. This object is available for reports and dashboards in the Winter '24 release and later.

[UnifiedVoiceCallParticipant](#)

Represents a participant in a voice call. This object is available for reports and dashboards in the Winter '24 release and later.

[UnitOfMeasure](#)

Defines the units and systems of units used to express and account for quantities. This object is available in API version 61.0 and later.

[UriEventLog](#)

URI events contain details about user interaction with the web browser UI. This object is available in API version 61.0 and later.

[UsageImpactFactor](#)

Represents a collection of fields to set up the Usage Impact Factors used across jurisdictions and programs. This object is available in API version 58.0 and later.

Standard Objects

[UsageImpactGroup](#)

Represents a collection of fields to set up the Usage Impact Groups used across jurisdictions and programs. This object is available in API version 58.0 and later.

[UsageImpactGroupFactor](#)

Represents a junction between an Usage Impact Group version and Usage Impact Factor. This object is available in API version 58.0 and later.

[UsageImpactGroupPgmMeasure](#)

Represents a junction between the program, product, and Usage Impact Group version. This object is available in API version 58.0 and later.

[UsageImpactGroupVersion](#)

Represents a collection of fields to set up the versions of Usage Impact Groups. This object is available in API version 58.0 and later.

[User](#)

Represents a user in your organization.

[UserAccessChange](#)

Represents a change related to user access. This object is available in API version 57.0 and later.

[UserAccessPolicy](#)

Represents a user access policy. This object is available in API version 57.0 and later.

[UserAccountTeamMember](#)

Represents a User on the default account team of another User.

[UserAppInfo](#)

Stores the last Lightning app logged in to. If the user hasn't logged into Salesforce or if the user lost access to the last accessed app, the UserAppInfo object stores a Null value. This object is available in API version 38.0 and later.

[UserAppMenuCustomization](#)

Represents an individual user's settings for items in the app menu or App Launcher. This object is available in API version 35.0 and later.

[UserAppMenuItem](#)

Represents the organization-wide settings for items in the app menu or App Launcher that the requesting user has access to in Setup. This object is available in API version 35.0 and later.

[UserAuthCertificate](#)

Represents a user authentication certificate in your org. A user certificate is a unique PEM-encoded X.509 digital certificate to authenticate individual users to your org. This object is available in API version 45.0 and later.

[UserConfigTransferButton](#)

Represents the association between a Chat configuration and a live chat button. This association allows users associated with a specific configuration to transfer chats to a button queue.

[UserConfigTransferSkill](#)

Represents the association between a Chat configuration and a skill. This association allows users associated with a specific configuration to transfer chats to agents who have that skill.

[UserCustomBadge](#)

Represents a custom badge for a user. This object is available in API version 38.0 and later.

[UserCustomBadgeLocalization](#)

Represents the translated version of a custom badge for a user. This object is available in API version 38.0 and later.

Standard Objects

[UserDailyMetric](#)

Represents the daily engagement metrics for a user. This object is available in API version 52.0 and later.

[UserDailyMetricOwnerSharingRule](#)

Represents the rules for sharing the user daily metric with users other than the owner.

[UserDefinedLabel](#)

Represents a label created by a user to help organize, track, and find records. This object is available in API version 61.0 and later.

[UserDefinedLabelAssignment](#)

Represents a relationship between a record label and the item the user assigned it to. This object is available in API version 61.0 and later.

[UserDevice](#)

Represents information unique to a device. Available in API version 43.0 and later.

[UserDeviceApplication](#)

Represents information on applications installed on a device that is accessing Salesforce. Available in API version 43.0 and later.

[UserDeviceHistory](#)

Represents tracking information on the UserDevice sObject. This object is available in API version 50.0 and later.

[UserEmailCalendarSync](#)

Represents the user assignments of an Einstein Activity Capture configuration. This object is available in API version 49.0 and later.

[UserEmailPreferredPerson](#)

Represents a mapping for a user's preferred record for an email address when multiple records match an email field. This object is available in API version 44.0 and later.

[UserEmailPreferredPersonShare](#)

Represents a sharing entry on a UserEmailPreferredPerson object. Sharing is not customizable for UserEmailPreferredPerson records. This object is available in API version 44.0 and later.

[UserLicense](#)

Represents a user license in your organization. A user license entitles a user to specific functionality and determines the profiles and permission sets available to the user.

[UserListView](#)

Represents the customizations a user made to a list view. This object is available in API version 32.0 and later.

[UserListViewCriterion](#)

Represents the criterion for a user's customized list view. The criterion consists of the filters or sort order a user added to a list view for the Salesforce Mobile app. This object is available in API version 32.0 and later.

[UserLocationAssignment](#)

Represents the assignment between a location and a user. This object is available in API version 57.0 and later.

[UserLogin](#)

Represents the settings that affect a user's ability to log into an organization. To access this object, you need the `UserPermissions.ManageUsers` permission. This object is available in API version 29.0 and later.

[UserMembershipSharingRule](#)

Represents the rules for sharing user records from a source group to a target group. A user record contains details about a user. Users who are members of the source group can be shared with members of the target group. The source and target groups can be based on roles, portal roles, public groups, or territories. This object is available in API version 26.0 and later.

[UserMonthlyMetric](#)

Represents the monthly engagement metrics for a user. This object is available in API version 52.0 and later.

Standard Objects

[UserMonthlyMetricOwnerSharingRule](#)

Represents the rules for sharing the user monthly metric with users other than the owner.

[UserPackageLicense](#)

Represents a license for an installed managed package, assigned to a specific user. This object is available in API version 31.0 and later.

[UserPermissionAccess](#)

Represents the permissions accessibility for a current user. Available in API version 41.0 and later.

[UserPrioritizedRecord](#)

Represents records that Pipeline Inspection, Account Intelligence, Contact Intelligence, and Lead Intelligence users flag as important for tracking in pipeline and intelligence views and filters. This object is available in API version 53.0 and later.

[UserPreference](#)

Represents a functional preference for a specific user in your organization.

[UserProfile](#)

Represents a Chatter user profile.

[UserProvAccount](#)

Represents information that links a Salesforce user account with an account in a third-party (target) system, such as Google, for users of connected apps with Salesforce user provisioning enabled. This object is available in API version 33.0 and later.

[UserProvAccountStaging](#)

Temporarily stores user account information while a user completes the User Provisioning Wizard. This information that is stored in the UserProvAccount object when you click the button to collect and analyze accounts on the target system.

[UserProvMockTarget](#)

Represents an entity for testing user data before committing the data to a third-party system for user provisioning.

[UserProvisioningConfig](#)

Represents information for a flow to use during a user provisioning request process, such as the attributes for an update. This object is available in API version 34.0 and later.

[UserProvisioningLog](#)

Represents messages generated during the process of provisioning users for third-party applications. This object is available in API version 33.0 and later.

[UserProvisioningRequest](#)

Represents an individual provisioning request to create, update, or delete a single user account in a third-party service system (or another Salesforce organization). This object is available in API version 33.0 and later.

[UserRecordAccess](#)

Represents a user's access to a set of records. This object is read only and is available in API version 24.0 and later. This object doesn't consider whether a user's access is blocked by a restriction rule.

[UserRelatedRecordContent](#)

Represents the link between a managed content record, an account, event, or opportunity record, and a user record. This object is reserved for future use.

[UserRole](#)

Represents a user role in your organization.

[UserServicePresence](#)

Represents a presence user's real-time presence status. This object is available in API version 32.0 and later.

Standard Objects

[UserSetupEntityAccess](#)

Represents the enabled custom permissions of the running user. This object is available in API version 48.0 and later.

[UserShare](#)

Represents a sharing entry on a user record. This object is available in API version 26.0 and later.

[UserSharedFeature](#)

For internal use only.

[UserTeamMember](#)

Represents a single User on the default opportunity team of another User.

[UserTerritory](#)

Represents a User who has been assigned to a Territory.

[UniqueQueryEventLog](#)

Unique Query events capture specific search queries (SOQL), filter IDs, and report IDs that are processed, along with the underlying database queries (SQL). This object is available in API version 65.0 and later.

[UserTerritory2Association](#)

Represents an association (by assignment) between a territory and a user record. Available only if Sales Territories has been enabled.

[UserTerritory2AssocLog](#)

Represents a log of when a user is assigned and unassigned from a territory. This object is available in API version 57.0 and later.

[UserUIPreference](#)

Represents user preferences for Salesforce components. This object is available in API version 63.0 and later.

[UserWorkList](#)

Represents a list of work items in the My List tab for Sales Engagement users.

[UserWorkListItem](#)

Represents an individual work item in the My List tab for Sales Engagement users.

[VendorCallCenterStatusMap](#)

Stores a mapping between a call center vendor agent status and a Salesforce presence status for an associated call center. This object is available in API version 54.0 and later.

[VerificationHistory](#)

Represents the past six months of your org users' attempts to verify their identity. This object is available in API version 36.0 and later.

[VisualforceAccessMetrics](#)

Represents summary statistics for Visualforce pages.

[VisualforceRequestEventLog](#)

Visualforce Request events contain details of Visualforce requests. Requests can originate from the browser (UI). This object is available in API version 61.0 and later.

[VideoCall](#)

Represents a video call. One `VideoCall` record can be related to several `VideoCallRecording` records — for example, a video call can have several video recordings and a transcript. As well, one video call record can be associated with several video call participant records. This object is available in API version 51.0 and later.

[VideoCallInsight](#)

Represents the video call insight data associated with a video call. Each record represents the call insight of a specific recording or transcript within a call. This object is available in API version 66.0 and later.

Standard Objects

[VideoCallInsightAction](#)

Represents a suggested follow-up action derived from a video call insight. VideoCallInsightAction manages recommended steps—such as sending an email, creating a task, or scheduling a meeting—that address specific moments, including competitor mentions, pricing discussions, or objections. This object is available in API version 66.0 and later.

[VideoCallInsightReason](#)

Represents the video call insight reason that contains the insight keyword, insight moments associated with a keyword, and the number of keyword occurrences. This object is available in API version 66.0 and later.

[VideoCallParticipant](#)

Represents a participant in a video call. Participant information can come from the video call provider (for example, Zoom), or Salesforce. This object is available in API version 51.0 and later.

[VideoCallRecording](#)

Represents a recording from a video call, such as a video recording, a voice recording, or a transcript. Video call recordings aren't saved in Salesforce. This object is available in API version 51.0 and later.

[VideoCallRecordingStructure](#)

Represents the structure of a video call recording, having relation to a video call participant, speaking order, start offset, and end offset. This object is available in API version 65.0 and later.

[VoiceCall](#)

Represents a call in Service Cloud Voice, Sales Dialer, or other supported voice connectors. For Service Cloud Voice, this can be a phone or Voice over Internet Protocol (VoIP) call. This object is available in API version 40.0 and later.

[VoiceCallInsight](#)

Represents the voice call insight data associated with a voice call. Each record represents the call insight of a specific recording or transcript within a call. This object is available in API version 66.0 and later.

[VoiceCallInsightAction](#)

Represents a suggested follow-up action derived from a voice call insight. VoiceCallInsightAction manages recommended steps—such as sending an email, creating a task, or scheduling a meeting—that address specific moments, including competitor mentions, pricing discussions, or objections. This object is available in API version 66.0 and later.

[VoiceCallInsightReason](#)

Represents the voice call insight reason that contains the insight keyword, insight moments associated with a keyword, and the number of keyword occurrences. This object is available in API version 66.0 and later.

[VoiceCallMetrics](#)

Represents metrics for a VoiceCall lifecycle event, aggregated daily. This object is available in API version 56.0 and later.

[VoiceCallList](#)

Represents a prioritized list of numbers to call.

[VoiceCallListItem](#)

Represents a single phone number in a prioritized call list.

[VoiceCallQualityFeedback](#)

Represents feedback given by a Sales Dialer user about the quality of a [VoiceCall](#).

[VoiceCallRecording](#)

Represents a call recording in Service Cloud Voice and Sales Dialer. Call recordings for Service Cloud Voice with Amazon Connect and for Service Cloud Voice with Partner Telephony from Amazon Connect are stored in S3 buckets on your Amazon Web Services (AWS) account and can be accessed via AWS. Call recordings for Sales Dialer are saved as files in Salesforce.

[VoiceCoaching](#)

Represents a call that is using call monitoring.

Standard Objects

[VoiceLocalPresenceNumber](#)

Represents a phone number with the same area code as the person who's being called.

[VoiceMailContent](#)

Represents a voicemail message left by a caller to the context user.

[VoiceMailGreeting](#)

Represents a custom greeting message that plays upon reaching a user's voicemail. This object is available in API version 41.0 and later.

[VoiceMailMessage](#)

Represents a prerecorded voicemail message.

[VoiceOrgSetting](#)

Represents the org's customized voice settings. This object is available in API version 46.0 and later.

[VoiceUserLine](#)

Represents a user's forwarding phone number.

[VoiceUserPreferences](#)

Represents the number the user displays when making outbound calls. This object is available in API version 41.0 and later.

[VoiceVendorInfo](#)

Represents information about the Service Cloud Voice or Sales Dialer provider's vendor.

[VoiceVendorLine](#)

Represents a user's phone number reserved with the vendor.

[Vote](#)

Represents a vote that a user has made on a Knowledge Article, Idea, or Reply.

[WarrantyTerm](#)

Represents warranty terms defining the labor, parts, and expenses covered, along with any exchange options, provided to rectify issues with products. This object is available in API version 50.0 and later.

[WaveAutoInstallRequest](#)

Provides access to the concrete object that represents a CRM Analytics auto-install request. The auto-install request tracks the progress of CRM Analytics applications created from CRM Analytics templates by the automated process user. This object is available in API version 38.0 and later.

[WebCart](#)

Represents an online shopping cart for a store built with B2B Commerce or D2C Commerce, with total amounts for products, shipping and handling, and taxes. This object is available in API version 49.0 and later.

[WebCartAdjustmentBasis](#)

Coupons that trigger promotions for the cart. When a customer tries to add a coupon to the cart, the store looks for promotions associated with the coupon. If a promotion results in a price adjustment, a WebCartAdjustmentBasis record is created. This object is available in API version 54.0 and later.

[WebCartAdjustmentGroup](#)

Group of price adjustments for a cart. This object is available in API version 52.0 and later.

[WebCartHistory](#)

WebCartHistory represents the history of changes to the values in the fields of the `webCart` object.

[WebLink](#)

Represents a custom link to a URL or Scontrol.

Standard Objects

[WebLinkLocalization](#)

Represents the translated value of the field label for a custom link to a URL or s-control when the Translation Workbench is enabled for your organization.

[WebStore](#)

Represents a B2B or D2C store. This object is available in API version 49.0 and later.

[WebstoreBuyerGroup](#)

Associates a webstore with a buyer group. Supports dynamically changing locales when buyers shop in orgs that are enabled for multiple languages and currencies. This object is available in API version 58.0 and later.

[WebStoreCatalog](#)

Represents the collection of products associated with a store. This object is available in API version 49.0 and later.

[WebStoreInventorySource](#)

Used to configure the inventory source for a webstore. This object is available in API version 57.0 and later.

[WebStoreMessageContent](#)

Represents the association of a managed content message record in CMS to a web store, along with other attributes that specify the application and intent of the message content. This object is available in API version 61.0 and later.

[WebStoreNetwork](#)

Represents the relationship between a web store and an experience site. This object is available in API version 49.0 and later.

[WebStorePricebook](#)

Represents a store price book used in Lightning B2B Commerce. This object is available in API version 48.0 and later.

[WebStoreSearchProdSettings](#)

Search settings for a WebStore product search. This object is available in API version 47.0 and later.

[WebStoreShare](#)

Represents a sharing entry on a B2B or D2C store. This object is available in API version 45.0 and later.

[Wishlist](#)

Represents a buyer-created list of [WishlistItems](#) in a store that's built with B2B Commerce on Lightning. Available in API version 49.0 and later.

[WishlistItem](#)

Represents an item on a `Wishlist` in a store built with B2B Commerce for Lightning. Available in API version 49.0 and later.

[WorkAccess](#)

Used to grant or restrict user access to give badge definitions. Each badge definition record must have one `WorkAccess` record.

[WorkAccessShare](#)

Used to control Givers of `WorkBadgeDefinition` records.

[WorkBadge](#)

Represents information about who the badge was given to and which badge was given. A `WorkBadge` record is created for each recipient of a `WorkBadgeDefinition`.

[WorkBadgeDefinition](#)

Represents the attributes of a badge including the badge name, description, and image. Each `WorkBadge` record must have a lookup to a `WorkBadgeDefinition` since badge attributes (like badge name) are derived from the `WorkBadgeDefinition` object.

[WorkCapacityAvailability](#)

Represents the available work capacity for a specific time and service territory. This object is available in API version 59.0 and later.

Standard Objects

[WorkCapacityLimit](#)

Represents the capacity limit in a specific service territory for a workstream or for the whole service territory in a given period. This object is available in API version 59.0 and later.

[WorkCapacityUsage](#)

Represents the capacity usage in a specific service territory for a workstream or for the whole service territory in a given period. This object is available in API version 59.0 and later.

[WorkCoaching](#)

Represents a single coaching relationship between two users. One of the users is defined as the coach and the other is defined as a coachee. WorkCoaching is feed-enabled so there is a private feed available to the coach and coachee.

[WorkDemographic](#)

Represents the field values used to specify slices in the workload forecasting and capacity planning. This object is available in API version 49.0 and later.

[WorkFeedback](#)

Represents the answer to a question that a person was asked via a feedback request. Also used to store offered feedback without linking it to a particular question.

[WorkFeedbackQuestion](#)

Represents a free-form text type or multiple choice question within a set of questions.

[WorkFeedbackQuestionSet](#)

Represents a set of questions being asked. The question set is used to link all the individual requests where different recipients were asked the same set of questions on the same subject.

[WorkFeedbackRequest](#)

Represents a single feedback request on a subject or topic (question) to a single recipient in the feedback application. In the case of offered feedback, WorkFeedbackRequest represents feedback that is offered about a subject. In the performance application, WorkFeedbackRequest represents a request for feedback on a set of questions from a question set, on a subject—for the recipient to complete and submit.

[WorkforceCapacity](#)

Represents the time series for actual or forecasted workforce allocation. This object is available in API version 51.0 and later.

[WorkforceCapacityUnit](#)

Represents the number of resources allocated or needed for a specific set of work items at a timestamp within a specific duration. This object is available in API version 51.0 and later.

[WorkGoal](#)

Represents the components of a goal, such as its description and associated metrics. This object has been deprecated as of API version 35.0. Use the [Goal](#) object to query information about WDC goals.

[WorkGoalCollaborator](#)

Represents collaborators on a WorkGoal object. This doesn't include WorkGoal followers, which is handled by Chatter Feed Follow functionality. This object has been deprecated as of API version 35.0. Use the [Goal](#) object to query information about WDC goals.

[WorkGoalCollaboratorHistory](#)

Represents the history of changes to the values in the fields in a WorkGoalCollaborator object. Access is read-only.

[WorkGoalHistory](#)

Represents the history of changes to the values in the fields of a WorkGoal. Access is read-only. This object has been deprecated as of API version 35.0. Use the [GoalHistory](#) object to query historical information for WDC goals.

Standard Objects

[WorkGoalLink](#)

Represents the relationship between two goals (many to many relationship). This object has been deprecated as of API version 35.0. Use the [GoalLink](#) object to query information about the relationship between two WDC goals.

[WorkGoalShare](#)

Represents a sharing entry on a WorkGoal object. This object has been deprecated as of API version 35.0. Use the GoalShare object to query information about sharing for WDC goals.

[Workload](#)

Represents the time series for work item volume and average handle time from aggregation and forecasting processes. This object is available in API version 49.0 and later.

[WorkloadUnit](#)

Represents the number of work items and average handle time in a specific time interval. This object is available in API version 49.0 and later.

[WorkOrder](#)

Represents field service work to be performed for a customer. This object is available in API version 36.0 and later.

[WorkOrderHistory](#)

Represents the history of changes made to tracked fields on a work order. This object is available in API version 36.0 and later.

[WorkOrderLineItem](#)

Represents a subtask on a work order in field service. This object is available in API version 36.0 and later.

[WorkOrderLineItemHistory](#)

Represents the history of changes made to tracked fields on a work order line item. This object is available in API version 36.0 and later.

[WorkOrderLineItemStatus](#)

Represents a possible status of a work order line item in field service.

[WorkOrderShare](#)

Represents a sharing entry on a work order. This object is available in API version 36.0 and later.

[WorkOrderStatus](#)

Represents a possible status of a work order in field service.

[WorkPerformanceCycle](#)

Represents feedback that is gathered to assess the performance of a specific set of employees.

[WorkPlan](#)

Represents a work plan for a work order or work order line item. This object is available in API version 52.0 and later.

[WorkPlanSelectionRule](#)

Represents a rule that selects a work plan for a work order or work order line item. This object is available in API version 52.0 and later.

[WorkPlanTemplate](#)

Represents a template for a work plan. This object is available in API version 52.0 and later.

[WorkPlanTemplateEntry](#)

Represents an object that associates a work step template with a work plan template. This object is available in API version 52.0 and later.

[WorkReward](#)

Used to store reward codes tied to a Reward Fund. Reward Funds must have at least one WorkReward record.

[WorkRewardFund](#)

Represents a Reward Fund and describes the Reward Fund attributes.

[WorkRewardFundType](#)

Represents the type of WorkRewardFund object.

[WorkStep](#)

Represents a work step in a work plan. This object is available in API version 52.0 and later.

[WorkStepStatus](#)

Represents a picklist for a status category on a work step. This object is available in API version 52.0 and later.

[WorkStepTemplate](#)

Represents a template for a work step. This object is available in API version 52.0 and later.

[WorkThanks](#)

Represents the source and message of a thanks post.

[WorkType](#)

Represents a type of work to be performed in Field Service and Lightning Scheduler. Work types are templates that can be applied to work order or work order line items. This object is available in API version 38.0 and later.

[WorkTypeGroup](#)

Represents a grouping of work types used to categorize types of appointments available in Lightning Scheduler, or to define scheduling limits in Field Service. This object is available in API version 45.0 and later.

[WorkTypeGroupMember](#)

Represents the relationship between a work type and the work type group it belongs to. This object is available in API version 45.0 and later.

AbnExperiment

Represents an A/B/n experiment that's used with Marketing Cloud Next content, Experience Cloud websites, and platform automations. This object is available in API version 63.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
DataSpaceId	Type reference Properties Filter, Group, Sort Description Unique identifier that refers to the data space where an experiment's resources originate. Required.

Field	Details
	This field is a relationship field. Relationship Name DataSpace Refers To DataSpace
Description	Type string Properties Filter, Group, Nillable, Sort Description Text description of the experiment. Optional.
DeveloperName	Type string Properties Filter, Group, Nillable, Sort Description System or user-generated API name for the experiment. Required.
LastAnalyzed	Type dateTime Properties Filter, Nillable, Sort Description Time and date of last analysis.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp that indicates the last time an experiment was referenced by another resource.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp that indicates the last time a user viewed the experiment.

Field	Details
Name	Type string Properties Filter, Group, idLookup, Sort Description Text label that identifies the experiment. Required.
PersonalizationSchemaEnum	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Picklist value that indicates the type of personalization schema, which is related to where a personalization decision is created. Possible values are: • DecisionDefined • ExperienceVariation • FlowPath
PersonalizationSchemaId	Type reference Properties Filter, Group, Nillable, Sort Description Unique identifier that refers to the schema that's related to the experiment. This field is a relationship field. Relationship Name PersonalizationSchema Refers To PersonalizationSchema
PrimaryMetricId	Type reference Properties Filter, Group, Nillable, Sort Description Unique identifier that refers to engagement signal metrics, which are used to measure an experiment. This field is a polymorphic relationship field.

Field	Details
	Relationship Name PrimaryMetric Refers To EngagementSignalCmpndMetric, EngagementSignalMetric
ProfileDataGraphId	Type reference Properties Filter, Group, Nillable, Sort Description Unique identifier that refers to the profile data graph that's used. This field is a relationship field. Relationship Name ProfileDataGraph Refers To DataGraph
ScheduleFrequencyInMinutes	Type int Properties Filter, Group, Nillable, Sort Description Number of minutes that defines when personalized content can be made available.
Source	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates where the experiment was created. Possible values are: • BlockBuilder—CMS content editors • ExperienceBuilder—Experience Site Builder • FlowBuilder • PersonalizationApp
SourceRecordId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description Unique identifier that refers to the specific record that contains the experiment. This field is a polymorphic relationship field. Relationship Name SourceRecord Refers To FlowRecordElement, ManagedContent
StartedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp that indicates when the experiment began or is scheduled to begin.
State	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Picklist value that indicates the current state of the experiment. Possible values are: • Archived • Created • Started • Stopped The default value is Created.
Status	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Picklist value that indicates the current status of the experiment while an action is being performed. Possible values are: • Active • CreateError • DeleteError • Deleting

Field	Details
	• <code>EditError</code> • <code>Processing</code> The default value is <code>Processing</code>.
<code>StoppedDate</code>	Type <code>dateTime</code> Properties Filter, Nillable, Sort Description Timestamp that indicates when the experiment ended or is scheduled to end.
<code>WinnerSelectionMode</code>	Type <code>picklist</code> Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Possible values are: • <code>Automatic</code> • <code>Manual</code> The default value is <code>Manual</code>.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AbnExperimentChangeEvent](#) on page 68

Change events are available for the object.

[AbnExperimentFeed](#) on page 55

Feed tracking is available for the object.

[AbnExperimentHistory](#) on page 63

History is available for tracked fields of the object.

[AbnExperimentOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[AbnExperimentShare](#) on page 67

Sharing is available for the object.

AbnExperimentCohort

Represents the specified audience that's participating in an A/B/n experiment. This object is available in API version 63.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
AbnExperimentId	Type reference Properties Filter, Group, Sort Description Unique identifier that refers to a related experiment. This field is a relationship field. Relationship Name AbnExperiment Relationship Type Parent-detail Refers To AbnExperiment (the parent object)
AllocationWeight	Type int Properties Filter, Group, Nillable, Sort Description Percentage of an audience to experience the selected part of the experiment.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Three letter ISO currency codes for supported currencies. Optional. Possible values are: • USD—U.S. Dollar
DataSpaceId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description Unique identifier that refers to the data space where an experiment cohort's resources originate. Required. This field is a relationship field. Relationship Name DataSpace Refers To DataSpace
Description	Type string Properties Filter, Group, Nillable, Sort Description Text description of the experiment.
DeveloperName	Type string Properties Filter, Group, Nillable, Sort Description System or user-generated API name for the experiment. Required.
IsControl	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Whether the cohort is used as the control group that performance is checked against. The default value is <code>false</code>.
IsFallThrough	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this cohort captures users who don't meet the criteria for other cohorts in the experiment. When <code>true</code>, this cohort serves as the fallback option. When <code>false</code>, users must explicitly qualify for this cohort. The default value is <code>false</code>.

Field	Details
Name	Type string Properties Filter, Group, idLookup, Sort Description Text label that identifies the experiment cohort. Required.
PersonalizerId	Type reference Properties Filter, Group, Nillable, Sort Description Unique identifier that refers to the personalizer that's related to the experiment cohort. This field is a relationship field. Relationship Name Personalizer Refers To PersonalizationRecommender

Usage

Use this object to describe experiment cohorts or to change allocation weights.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AbnExperimentCohortChangeEvent](#) on page 68

Change events are available for the object.

[AbnExperimentCohortFeed](#) on page 55

Feed tracking is available for the object.

[AbnExperimentCohortHistory](#) on page 63

History is available for tracked fields of the object.

[AbnExperimentCohortOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[AbnExperimentCohortShare](#) on page 67

Sharing is available for the object.

AcceptedEventRelation

Represents event participants (invitees or attendees) with the status `Accepted` for a given event.

This object is available in API versions 29.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
<code>EventId</code>	Type reference Properties Filter, Group, Nillable, Sort Description Indicates the ID of the event. This is a relationship field. Relationship Name Event Relationship Type Lookup Refers To Event
<code>RelationId</code>	Type reference Properties Filter, Group, Nillable, Sort Description Indicates the ID of the invitee. This is a polymorphic relationship field. Relationship Name Relation Relationship Type Lookup Refers To Calendar, Contact, Lead, User

Field Name	Details
RespondedDate	Type dateTime Properties Filter, Nillable, Sort Description Indicates the most recent date and time when the invitee accepted an invitation to the event.
Response	Type string Properties Filter, Group, Nillable, Sort Description Indicates the content of the response field. Label is Comment.
Type	Type string Properties Filter, Group, Nillable, Sort Description Indicates whether the invitee is a user, lead or contact, or resource.

Usage

Query invitees who have accepted an invitation to an event

```
SELECT eventId, type, response FROM AcceptedEventRelation WHERE eventId='00UTD000000ZH5LA'
```

SEE ALSO:

[DeclinedEventRelation](#)

[UndecidedEventRelation](#)

Account

Represents an individual account, which is an organization or person involved with your business (such as customers, competitors, and partners).

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `merge()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Experience Cloud site or Customer Portal users can access their own accounts and any account shared with them.

Fields

Field Name	Details
AccountNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Account number assigned to this account (not the unique, system-generated ID assigned during creation). Maximum size is 40 characters.
AccountSource	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The source of the account record. For example, <i>Advertisement</i> or <i>Trade Show</i>. The source is selected from a picklist of available values, which are set by an administrator. Each picklist value can have up to 40 characters.
ActivityMetricId	Type reference Properties Filter, Group, Nillable, Sort Description When Einstein Activity Capture with Activity Metrics is enabled, the ID of the related activity metric. This field is a relationship field. Relationship Name ActivityMetric Refers To ActivityMetric
ActivityMetricRollupId	Type reference Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description When Einstein Activity Capture with Activity Metrics is enabled, the ID of the related activity metric rollup. This field is a relationship field. Relationship Name ActivityMetricRollup Refers To ActivityMetricRollup
AnnualRevenue	Type currency Properties Create, Filter, Nillable, Sort, Update Description Estimated annual revenue of the account.
BillingAddress	Type address Properties Filter, Nillable Description The compound form of the billing address. Read-only. For details on compound address fields, see Address Compound Fields.
BillingCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the billing address of this account. Maximum size is 40 characters.
BillingCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the billing address of this account. Maximum size is 80 characters.
BillingCountryCode	Type picklist

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO country code for the account's billing address.
BillingGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Accuracy level of the geocode for the billing address. For details on geolocation compound fields, see Compound Field Considerations and Limitations .
BillingLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>BillingLongitude</code> to specify the precise geolocation of a billing address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations .
BillingLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>BillingLatitude</code> to specify the precise geolocation of a billing address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places. See Compound Field Considerations and Limitations for details on geolocation compound fields.
BillingPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the billing address of this account. Maximum size is 20 characters.
BillingState	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description Details for the billing address of this account. Maximum size is 80 characters.
BillingStateCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO state code for the account's billing address.
BillingStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Street address for the billing address of this account.
ChannelProgramLevelName	Type string Properties Group, Nillable Description Read only. Name of the channel program level the account has enrolled. If this account has enrolled more than one channel program level, the oldest channel program name is displayed.
ChannelProgramName	Type string Properties Group, Nillable Description Read only. Name of the channel program the account has enrolled. If this account has enrolled more than one channel program, the oldest channel program name is displayed.
CleanStatus	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates the record's clean status as compared with Data.com.. Possible values are: AcknowledgedThe label on the account record detail page is Reviewed.

Field Name	Details
	• Different • Inactive • Matched—The label on the account record detail page is In Sync. • NotFound • PendingThe label on the account record detail page is Not Compared. • SelectMatch • Skipped
ConnectionReceivedId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the PartnerNetworkConnection that shared this record with your organization. This field is available if you enabled Salesforce to Salesforce.
ConnectionSentId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the PartnerNetworkConnection that you shared this record with. This field is available if you enabled Salesforce to Salesforce. This field is supported using API versions earlier than 15.0. In all other API versions, this field's value is null. You can use the new PartnerNetworkRecordConnection object to forward records to connections.
Description	Type textarea Properties Create, Nillable, Update Description Text description of the account. Limited to 32,000 KB.
DunsNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The Data Universal Numbering System (D-U-N-S) number is a unique, nine-digit number assigned to every business location in the Dun & Bradstreet database that has a unique, separate, and distinct operation. D-U-N-S numbers are used by industries and organizations

Field Name	Details
	around the world as a global standard for business identification and tracking. Maximum size is 9 characters. This field is available on business accounts, not person accounts.  Note: This field is only available to organizations that use Data.com Prospector or Data.com Clean.
Fax	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description Fax number for the account.
Industry	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description An industry associated with this account. For example, <i>Biotechnology</i>. Maximum size is 40 characters.
IsBuyer	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates that the account is enabled as a buyer for Lightning B2B Commerce. The default value is <code>false</code>. This field is available in API version 48.0 and later.  Note: This field is only available to organizations that have the B2B Commerce license enabled.
IsCustomerPortal	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the account has at least one contact enabled to use the org's Experience Cloud site or Customer Portal (<code>true</code>) or not (<code>false</code>). This field is available if Customer Portal is enabled OR digital experiences is enabled. If your org is enabled to use Content Security Policy (CSP) features, then this field is visible on the Account object even if those features are later disabled.

Field Name	Details
	If you change this field's value from <code>true</code> to <code>false</code>, you can disable up to 100 Experience Cloud site or Customer Portal users associated with the account and permanently delete all of the account's site roles and groups. You can't restore deleted site roles and groups. Exclude this field when merging accounts. This field can be updated in API version 16.0 and later.  Tip: We recommend that you update up to 50 contacts simultaneously when changing the accounts on contacts enabled for an Experience Cloud site. We also recommend that you make this update after business hours.
IsPartner	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the account has at least one contact enabled to use the org's partner portal (<code>true</code>) or not (<code>false</code>). This field is available if partner relationship management (partner portal) is enabled OR digital experiences is enabled and you have partner portal licenses. If you change this field's value from <code>true</code> to <code>false</code>, you can disable up to 15 partner portal users associated with the account and permanently delete all of the account's partner portal roles and groups. You can't restore deleted partner portal roles and groups. Disabling a partner portal user in the Salesforce user interface or the API doesn't change this field's value from <code>true</code> to <code>false</code>. Even if this field's value is <code>false</code>, you can enable a contact on an account as a partner portal user via the API. Exclude this field when merging accounts. This field can be updated in API version 16.0 and later.  Tip: We recommend that you update up to 50 contacts simultaneously when changing the accounts on contacts enabled for an Experience Cloud site. We also recommend that you make this update after business hours.
IsPersonAccount	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Read only. Label is Is Person Account. Indicates whether this account has a record type of Person Account (<code>true</code>) or not (<code>false</code>).
IsPriorityRecord	Type boolean

Field Name	Details
	Properties Defaulted on create, Group Description Shows whether the user has marked the account as important (<i>True</i>) or not (<i>False</i>). The default value is <code>false</code>. Available in API version 60.0 and later.
Jigsaw	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description References the ID of a company in Data.com. If an account has a value in this field, it means that the account was imported from Data.com. If the field value is <code>null</code>, the account was not imported from Data.com. Maximum size is 20 characters. Available in API version 22.0 and later. Label is Data.com Key. This field is available on business accounts, not person accounts.  Important: The <code>Jigsaw</code> field is exposed in the API to support troubleshooting for import errors and reimporting of corrected data. Do not modify the value in the <code>Jigsaw</code> field.
JigsawCompanyId	Type string Properties Filter, Group, Nillable, Sort Description The ID of the company in reference to <code>Jigsaw</code>.  Important: The <code>Jigsaw</code> field is exposed in the API to support troubleshooting for import errors and reimporting of corrected data. Don't modify the value in the <code>Jigsaw</code> field.
LastActivityDate	Type date Properties Filter, Group, Nillable, Sort Description Value is one of the following, whichever is the most recent: • Due date of the most recent event logged against the record. • Due date of the most recently closed task associated with the record.
LastReferencedDate	Type datetime

Field Name	Details
	Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
LastViewedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>), but not viewed it.
MasterRecordId	Type reference Properties Filter, Group, Nillable, Sort Description If this object was deleted as the result of a merge, this field contains the ID of the record that was kept. If this object was deleted for any other reason, or has not been deleted, the value is <code>null</code>. This is a relationship field. Relationship Name MasterRecord Relationship Type Lookup Refers To Account
NaicsCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The six-digit North American Industry Classification System (NAICS) code is the standard used by business and government to classify business establishments into industries, according to their economic activity for the purpose of collecting, analyzing, and publishing statistical data related to the U.S. business economy. Maximum size is 8 characters. This field is available on business accounts, not person accounts.

Field Name	Details
	 Note: This field is only available to organizations that use Data.com Prospector or Data.com Clean.
NaicsDesc	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of an org's line of business, based on its NAICS code. Maximum size is 120 characters. This field is available on business accounts, not person accounts.  Note: This field is only available to organizations that use Data.com Prospector or Data.com Clean.
Name	Type string Properties Create, Filter, Group, Sort, Update Description Required. Label is Account Name. Name of the account. Maximum size is 255 characters. If the account has a record type of Person Account: • This value is the concatenation of the <code>FirstName</code>, <code>MiddleName</code>, <code>LastName</code>, and <code>Suffix</code> of the associated person contact. • You can't modify this value.
NumberOfEmployees	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Label is Employees. Number of employees working at the company represented by this account. Maximum size is eight digits.
OperatingHoursId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The operating hours associated with the account. Available only if Field Service is enabled. This is a relationship field. Relationship Name OperatingHours

Field Name	Details
	Relationship Type Lookup Refers To OperatingHours
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who currently owns this account. Default value is the user logged in to the API to perform the create. If you have set up account teams in your org, updating this field has different consequences depending on your version of the API: - For API version 12.0 and later, sharing records are kept, as they are for all objects. - For API version before 12.0, sharing records are deleted. - For API version 16.0 and later, users must have the “Transfer Record” permission in order to update (transfer) account ownership using this field. This is a relationship field. Relationship Name Owner Relationship Type Lookup Refers To User
Ownership	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Ownership type for the account, for example Private, Public, or Subsidiary.
ParentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the parent object, if any. This is a relationship field.

Field Name	Details
	Relationship Name Parent
	Relationship Type Lookup
	Refers To Account
PersonActionCadenceAssigneeId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description The ID of the sales rep designated to work the lead through their assigned cadence. This field is available in API version 47.0 and later when the Sales Engagement license is enabled. To see this field, the user also needs the Sales Engagement User or Sales Engagement Quick Cadence Creator user permission set. This field is a polymorphic relationship field.
	Relationship Name PersonActionCadenceAssignee
	Refers To Group, User
PersonActionCadenceId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description The ID of the lead's assigned cadence. This field is available in API version 46.0 and later when the Sales Engagement license is enabled. To see this field, the user also needs the Sales Engagement User or Sales Engagement Quick Cadence Creator user permission set. This is a relationship field.
	Relationship Name PersonActionCadence
	Refers To ActionCadence
PersonActionCadenceState	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort

Field Name	Details
	Description The state of the current action cadence tracker. This field is available in API version 50.0 and later when the Sales Engagement license is enabled. To see this field, the user also needs the Sales Engagement User or Sales Engagement Quick Cadence Creator user permission set. Possible values are: • Complete • Error • Initializing • Paused • Processing • Running
PersonIndividualId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the data privacy record associated with this person's account. This field is available if you enabled Data Protection and Privacy in Setup. Available in API version 42.0 and later.
PersonScheduledResumeDateTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the action cadence tracker is going to resume after it's paused or on a wait step. This field is available in API version 54.0 and later when the Sales Engagement license is enabled. To see this field, the user also needs the Sales Engagement User or Sales Engagement Quick Cadence Creator user permission set.
Phone	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description Phone number for this account. Maximum size is 40 characters.
PhotoUrl	Type url

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description Path to be combined with the URL of a Salesforce instance (for example, <code>https://yourInstance.salesforce.com/</code>) to generate a URL to request the social network profile image associated with the account. Generated URL returns an HTTP redirect (code 302) to the social network profile image for the account. Blank if Social Accounts and Contacts isn't enabled for the org or if Social Accounts and Contacts is disabled for the requesting user.
Rating	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The account's prospect rating, for example Hot, Warm, or Cold.
RecordTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the record type assigned to this object.
Salutation	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Honorific added to the name for use in letters, etc. This field is available on person accounts.
ShippingAddress	Type address Properties Filter, Nillable Description The compound form of the shipping address. Read-only. See Address Compound Fields for details on compound address fields.
ShippingCity	Type string

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Details of the shipping address for this account. City maximum size is 40 characters
ShippingCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details of the shipping address for this account. Country maximum size is 80 characters.
ShippingCountryCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO country code for the account's shipping address.
ShippingGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Accuracy level of the geocode for the shipping address. For details on geolocation compound fields, see Compound Field Considerations and Limitations .
ShippingLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>ShippingLongitude</code> to specify the precise geolocation of a shipping address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations .
ShippingLongitude	Type double Properties Create, Filter, Nillable, Sort, Update

Field Name	Details
	Description Used with <code>ShippingLatitude</code> to specify the precise geolocation of an address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations.
<code>ShippingPostalCode</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details of the shipping address for this account. Postal code maximum size is 20 characters.
<code>ShippingState</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details of the shipping address for this account. State maximum size is 80 characters.
<code>ShippingStateCode</code>	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO state code for the account's shipping address.
<code>ShippingStreet</code>	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The street address of the shipping address for this account. Maximum of 255 characters.
<code>Sic</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Standard Industrial Classification code of the company's main business categorization, for example, 57340 for Electronics. Maximum of 20 characters. This field is available on business accounts, not person accounts.

Field Name	Details
SicDesc	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of an org's line of business, based on its SIC code. Maximum length is 80 characters. This field is available on business accounts, not person accounts.
Site	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Name of the account's location, for example <code>Headquarters</code> or <code>London</code>. Label is Account Site. Maximum of 80 characters.
TickerSymbol	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The stock market symbol for this account. Maximum of 20 characters. This field is available on business accounts, not person accounts.
Tradestyle	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A name, different from its legal name, that an org may use for conducting business. Similar to "Doing business as" or "DBA". Maximum length is 255 characters. This field is available on business accounts, not person accounts.  Note: This field is only available to organizations that use Data.com Prospector or Data.com Clean.
Type	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Type of account, for example, Customer, Competitor, or Partner.

Field Name	Details
Website	Type url Properties Create, Filter, Group, Nillable, Sort, Update Description The website of this account. Maximum of 255 characters.
YearStarted	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The date when an org was legally established. Maximum length is 4 characters. This field is available on business accounts, not person accounts.  Note: This field is only available to organizations that use Data.com Prospector or Data.com Clean.

IsPersonAccount Fields

These fields are the subset of person account fields that are contained in the child person contact record of each person account. If the `IsPersonAccount` field has the value `false`, the following fields have a null value and can't be modified. If `true`, the fields can be modified.

Person account fields only show when person accounts are enabled. Person accounts are disabled by default.

Field Name	Details
FirstName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description First name of the person for a person account. Maximum size is 40 characters.
LastName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Last name of the person for a person account. Required if the record type is a person account record type. Maximum size is 80 characters.

Field Name	Details
MiddleName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Middle name of the person for a person account. Maximum size is 40 characters.
PersonAssistantName	Type string Properties Create, Filter, Nillable, Update Description The person account's assistant name. Label is Assistant. Maximum size is 40 characters.
PersonAssistantPhone	Type phone Properties Create, Filter, Nillable, Update Description The person account's assistant phone. Label is Asst. Phone. Maximum size is 40 characters.
PersonBirthDate	Type date Properties Create, Filter, Nillable, Update Description The birthday of the contact associated with this person account. Label is Birthdate. The year portion of the <code>PersonBirthDate</code> field is ignored in filter criteria, including report filters, list view filters, and SOQL queries. For example, the following SOQL query returns person accounts with birthdays later in the year than today: <pre>SELECT FirstName, LastName, PersonBirthDate FROM Account WHERE Birthdate > TODAY</pre>
PersonContactId	Type reference Properties Filter, Nillable, Update Description The ID for the contact associated with this person account. Label is Contact ID.

Field Name	Details
PersonDepartment	Type string Properties Create, Filter, Nillable, Update Description The department. Label is Department. Maximum size is 80 characters.
PersonEmail	Type email Properties Create, Filter, Nillable, Update Description Email address for this person account. Label is Email.
PersonEmailBouncedDate	Type dateTime Properties Create, Filter, Nillable, Update Description If bounce management is activated and an email sent to the person account bounces, the date and time the bounce occurred.
PersonEmailBouncedReason	Type string Properties Create, Filter, Nillable, Update Description If bounce management is activated and an email sent to the person account bounces, the reason the bounce occurred
PersonGenderIdentity	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The person's internal experience of their gender, which may or may not correspond to the person's designated sex at birth. Label is Gender Identity.
PersonHasOptedOutOfEmail	Type boolean Properties Create, Filter, Nillable, Update

Field Name	Details
	Description Indicates whether the person account has opted out of email (<code>true</code>) or not (<code>false</code>). Label is Email Opt Out .
PersonHomePhone	Type phone Properties Create, Filter, Nillable, Update Description The home phone number for this person account. Label is Home Phone .
PersonLeadSource	Type picklist Properties Create, Filter, Nillable, Update Description The person account's lead source. Label is Lead Source .
PersonMailingAddress	Type address Properties Filter, Nillable Description The compound form of the person account mailing address. Read-only. For details on compound address fields, see Address Compound Fields .
- PersonMailingCity - PersonMailingCountry - PersonMailingPostalCode - PersonMailingState	Type string Properties Create, Filter, Nillable, Update Description Details about the mailing address for this person account. Labels are Mailing City , Mailing Country , Postal Code , and State . Maximum size for city and country is 40 characters. Maximum size for postal code and state is 20 characters.
- PersonMailingCountryCode - PersonMailingStateCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO country or state code for the mailing address of the person account.

Field Name	Details
PersonMailingGeocodeAccuracy	Type picklist Properties Retrieve, Query, Restricted picklist, Nillable Description Accuracy level of the geocode for the person's mailing address. For details on geolocation compound fields, see Compound Field Considerations and Limitations.
PersonMailingLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>PersonMailingLongitude</code> to specify the precise geolocation of a person account's mailing address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations.
PersonMailingLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>PersonMailingLatitude</code> to specify the precise geolocation of a person account's mailing address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations on page 19.
PersonMailingStreet	Type textarea Properties Create, Filter, Nillable, Update Description The mailing street address for this person account. Label is Mailing Street. Maximum size is 255 characters.
PersonMobilePhone	Type phone Properties Create, Filter, Nillable, Update Description The mobile phone number for this person account. Label is Mobile.

Field Name	Details
- PersonOtherCity - PersonOtherCountry - PersonOtherPostalCode - PersonOtherState	Type string Properties Create, Filter, Nillable, Update Description Details about the alternate address for this person account. Labels are Other City, Other Country, Other Zip/Postal Code, and Other State.
- PersonOtherCountryCode - PersonOtherStateCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO country or state code for the alternate address of the person account.
PersonOtherLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>PersonOtherLongitude</code> to specify the precise geolocation of a person account's alternate address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations.
PersonOtherLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>PersonOtherLatitude</code> to specify the precise geolocation of a person account's alternate address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations.
PersonOtherPhone	Type phone Properties Create, Filter, Nillable, Update Description The alternate phone number for this person account. Label is Other Phone.

Field Name	Details
PersonOtherStreet	Type textarea Properties Create, Filter, Nillable, Update Description The person account's alternate street address. Label is Other Street.
PersonPronouns	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The individual's personal pronouns, reflecting their gender identity. Others can use these pronouns to refer to the individual in the third person. The entry is selected from a picklist of available values, which the administrator sets. Maximum 40 characters. Label is Pronouns. Possible values are: • He/Him • He/They • Not Listed • She/Her • She/They • They/Them
PersonReportsToId	Type reference Properties Create, Filter, Group, Nillable, Sort Update Description ID of the person account or contact that this person account reports to. This field doesn't appear if <code>enableReportsToOnPersonAccount</code> in the <code>AccountSettings</code> metadata type is <code>false</code>. Available in API version 62.0 and later. This is a relationship field. Relationship Name PersonReportsTo Relationship Type Lookup Refers To Contact

Field Name	Details
PersonTitle	Type string Properties Create, Filter, Nillable, Update Description The person account's title. Label is Title. Maximum size is 80 characters. When converting a lead to a person account, the conversion fails if the lead's Title field contains more than 80 characters.
Suffix	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Name suffix of the person for a person account. Maximum size is 40 characters.



Note: When importing account data, users need the Set Audit Fields upon Record Creation permission to assign values to audit fields such as `CreatedDate`. Audit fields are automatically updated during API operations unless you set these fields yourself.

Usage

Use this object to query and manage accounts in your org. Client applications can create, update, delete, or query Attachment records associated with an account via the API.

Client applications can also create or update account objects by converting a Lead via the `convertLead()` call.

If the values in the `IsPersonAccount` Fields are not null, you can't change `IsPersonAccount` to `false` or an error occurs.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AccountChangeEvent (API version 44.0)

Change events are available for the object.

AccountFeed (API version 18.0)

Feed tracking is available for the object.

AccountHistory (API version 11.0)

History is available for tracked fields of the object.

AccountOwnerSharingRule

Sharing rules are available for the object.

AccountShare

Sharing is available for the object.

SEE ALSO:

- AccountShare
- AccountTeamMember
- SOAP API Developer Guide: Person Account Record Types

AccountBrand

Represents the brand details of a Partner Account. This object is available in API version 43.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated() query(), retrieve(), search(), undelete(), update(), upsert()

Special Access Rules

This object is available only if digital experiences is enabled in your org and it has a Partner Community or Customer Community Plus license.

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the Account. This number is unique within your organization.
Address	Type address Properties Filter, Nillable Description The street address.
City	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The city.
CompanyName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the company associated with the account brand.
Country	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The country where the account is physically located.
Email	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Email address associated with the account.
GeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist Sort, Update Description Stores data for accurate geocoded location.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Most recent date referenced.
LastViewedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description Most recent date viewed.
Latitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used along with <code>Longitude</code> to specify the precise geolocation of an address.
LogoId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the logo.
LogoUrl	Type url Properties Nillable, Description URL of the logo. This field is available in API version 44.0 and later.
Longitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>Latitude</code> to specify the precise geolocation of an address.
Name	Type string Properties Create, Filter, Nillable, Sort, Update Description Required. Name of the account.
OwnerId	Type reference

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Required. ID of the Owner.
Phone	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description Phone number.
PostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The postal code where the user's IP address is physically located.
State	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The address state.
Street	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The address street.
Website	Type url Properties Create, Filter, Group, Nillable, Sort, Update Description Website for the Account Brand.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

AccountBrandOwnerSharingRule

Sharing rules are available for the object.

AccountBrandShare

Sharing is available for the object.

AccountContactRelation

Represents a relationship between a contact and one or more accounts.

This object is available in API version 37.0. The AccountContactRelation object supports person accounts. That means that a person account can be either a related contact on a business account or a related account on a contact. A person account can also be related to another person account as either a related contact or related account.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
AccountContactRelationshipCurrency	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for organizations with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
AccountId	Type reference Properties Create, Filter, Group, Sort Description ID of the account that is related to the contact. Field can't be modified when updating existing account-contact relationship records.
ContactId	Type reference Properties Create, Filter, Group, Sort

Field Name	Details
	Description ID of the contact that is related to the account. Field can't be modified when updating existing account-contact relationship records.
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date a relationship between a contact and account ended. Use with the <code>StartDate</code> to keep a history of the relationship.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether relationship is active (<code>true</code>) or not (<code>false</code>).
IsDirect	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the account associated with the contact is the contact's primary account (<code>true</code>) or not (<code>false</code>).
Roles	Type multipicklist Properties Create, Filter, Nillable, Update Description The contact's participating role in the account. Values are <code>Business User</code> , <code>Decision Maker</code> , <code>Economic Buyer</code> , <code>Economic Decision Maker</code> , <code>Evaluator</code> , <code>Executive Sponsor</code> , <code>Influencer</code> , <code>Technical Buyer</code> , and <code>Other</code> .
StartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The date a relationship between a contact and account began. Use with the <code>EndDate</code> to keep a history of the relationship.

Usage

Use this object to associate a single contact record to multiple account records so you can easily track the relationships between the people and businesses they work with.

When you insert a non-private contact in your org that associates a contact to multiple accounts, an `AccountContactRelation` is created and its validation rules, database insertion, and triggers are executed immediately after the contact is saved to the database. When you change a contact's primary account, an `AccountContactRelation` may be created or edited, and the `AccountContactRelation` validation rules, database changes, and triggers are executed immediately after the contact is saved to the database. See [Order of Execution](#).

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AccountContactRelationChangeEvent](#) on page 68 (API version 59.0)

Change events are available for the object.

AccountCleanInfo

Stores the metadata Data.com Clean uses to determine an account record's clean status. `AccountCleanInfo` helps you automate the cleaning or related processing of account records.



Note: When your Data.com Prospector or Data.com Clean contract expires, Data.com features, objects, and fields will be removed from your org.

To support customers' needs around compliance and to remain a leader in trust and privacy, Salesforce removed all contact data from the Data.com service on February 1, 2021.

For more information, see [Data.com Prospector and Clean Retirement](#).

Account Clean Info provides a snapshot of the data in your Salesforce account record and its matched Data.com record at the time the Salesforce record was cleaned.

Account Clean Info includes a number of bit vector fields, whose component fields each correspond to individual object fields and provide related data or status information about those fields. For example, the bit vector field `IsDifferent` has an `IsDifferentState` field. If the `IsDifferentState` field's value is `False`, that means the `State` field value is *the same* on the Salesforce account record and its matched Data.com record.

`AccountCleanInfo` bit vector fields include:

- `CleanedBy` indicates who (a user) or what (a Clean job) cleaned the account record.
- `IsDifferent` indicates whether or not a field on the account record has a value that differs from the corresponding field on the matched Data.com record.
- `IsFlaggedWrong` indicates whether or not a field on the account record has a value that is flagged as wrong to Data.com.

- `IsReviewed` indicates whether or not a field on the account record is in a `Reviewed` state, which means that the value was reviewed but not accepted.

Their individual bits are defined here.

Supported Calls

`describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Fields

Field Name	Details
<code>AccountId</code>	Type reference Properties Filter, Group, Sort Description The unique, system-generated ID assigned when the account record was created.
<code>AccountSite</code>	Type string Properties Filter, Group, Nillable, Sort Description Information about the account's location, such as single location, headquarters, or branch.
<code>Address</code>	Type address Properties Filter, Nillable Description The compound form of the address. Read-only. See Address Compound Fields for details on compound address fields.
<code>AnnualRevenue</code>	Type currency Properties Filter, Nillable, Sort Description Estimated annual revenue of the account.
<code>City</code>	Type string

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description Details for the billing address of the account.
CleanedByJob	Type boolean Properties Filter Description Indicates whether the account record was cleaned by a Data.com Clean job (<code>true</code>) or not (<code>false</code>).
CleanedByUser	Type boolean Properties Filter Description Indicates whether the account record was cleaned by a Salesforce user (<code>true</code>) or not (<code>false</code>).
CompanyName	Type string Properties Filter, Group, Nillable, Sort Description The name of the company.
CompanyStatusDataDotCom	Type picklist Properties Filter, Group, Nillable, Sort Description The status of the company per Data.com. Values are: Company is In Business per Data.com or Company is Out of Business per Data.com.
Country	Type string Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description Details for the billing address of the account.
DandBCompanyDunsNumber	Type string Properties Filter, Group, Nillable, Sort Description The D-U-N-S Number on the D&B Company record (if any) that is linked to the account.
DataDotComId	Type string Properties Filter, Group, Nillable, Sort Description The ID Data.com maintains for the company.
Description	Type textarea Properties Nillable Description A description of the account.
DunsNumber	Type string Properties Filter, Group, Nillable, Sort Description The Data Universal Numbering System (D-U-N-S) number is a unique, nine-digit number assigned to every business location in the Dun & Bradstreet database that has a unique, separate, and distinct operation. D-U-N-S numbers are used by industries and organizations around the world as a global standard for business identification and tracking.
DunsRightMatchConfidence	Type int Properties Filter, Group, Nillable, Sort Description The account's DUNSRight confidence code.

Field Name	Details
DunsRightMatchGrade	Type string Properties Filter, Group, Nillable, Sort Description The account's DUNSRight match grade.
Fax	Type phone Properties Filter, Group, Nillable, Sort Description The account's fax number.
Industry	Type picklist Properties Filter, Group, Nillable, Sort Description The industry the account belongs to.
IsDifferentAccountSite	Type boolean Properties Filter Description Indicates whether the account's AccountSite field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
IsDifferentAnnualRevenue	Type boolean Properties Filter Description Indicates whether the account's AnnualRevenue field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
IsDifferentCity	Type boolean Properties Filter

Field Name	Details
	Description Indicates whether the account's <code>City</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentCompanyName</code>	Type boolean Properties Filter Description Indicates whether the account's <code>AccountName</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentCountry</code>	Type boolean Properties Filter Description Indicates whether the account's <code>Country</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentCountryCode</code>	Type boolean Properties Filter Description Indicates whether the account's <code>Country Code</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentDandBCompanyDunsNumber</code>	Type boolean Properties Filter Description Indicates whether the account's <code>DandBCompanyID</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentDescription</code>	Type boolean Properties Filter

Field Name	Details
	Description Indicates whether the account's <code>Description</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentDunsNumber</code>	Type boolean Properties Filter Description Indicates whether the account's <code>DunsNumber</code> field value is different from the D-U-N-S Number on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentFax</code>	Type boolean Properties Filter Description Indicates whether the account's <code>Fax</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentIndustry</code>	Type boolean Properties Filter Description Indicates whether the account's <code>Industry</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentNaicsCode</code>	Type boolean Properties Filter Description Indicates whether the account's <code>NaicsCode</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentNaicsDescription</code>	Type boolean Properties Filter

Field Name	Details
	Description Indicates whether the account's <code>NaicsDescription</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentNumberOfEmployees</code>	Type boolean Properties Filter Description Indicates whether the account's <code>NumberOfEmployees</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentOwnership</code>	Type boolean Properties Filter Description Indicates whether the account's <code>Ownership</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentPhone</code>	Type boolean Properties Filter Description Indicates whether the account's <code>Phone</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentPostalCode</code>	Type boolean Properties Filter Description Indicates whether the account's <code>PostalCode</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentSic</code>	Type boolean Properties Filter

Field Name	Details
	Description Indicates whether the account's <code>Sic</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentSicDescription</code>	Type boolean Properties Filter Description Indicates whether the account's <code>SicDescription</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentState</code>	Type boolean Properties Filter Description Indicates whether the account's <code>State</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentStateCode</code>	Type boolean Properties Filter Description Indicates whether the account's <code>State Code</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentStreet</code>	Type boolean Properties Filter Description Indicates whether the account's <code>State</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentTickerSymbol</code>	Type boolean Properties Filter

Field Name	Details
	Description Indicates whether the account's <code>TickerSymbol</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentTradestyle</code>	Type boolean Properties Filter Description Indicates whether the account's <code>Tradestyle</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentWebsite</code>	Type boolean Properties Filter Description Indicates whether the account's <code>Website</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentYearStarted</code>	Type boolean Properties Filter Description Indicates whether the account's <code>YearStarted</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongAccountSite</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>AccountSite</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongAddress</code>	Type boolean Properties Filter, Update

Field Name	Details
	Description Indicates whether the account's <code>Address</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongAnnualRevenue</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>AnnualRevenue</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongCompanyName</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>CompanyName</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongDescription</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>Description</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongDunsNumber</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>DunsNumber</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongFax</code>	Type boolean Properties Filter, Update

Field Name	Details
	Description Indicates whether the account's <code>Fax</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongIndustry</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>Industry</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongNaicsCode</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>NaicsCode</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongNaicsDescription</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>NaicsDescription</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongNumberOfEmployees</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>NumberOfEmployees</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongOwnership</code>	Type boolean Properties Filter, Update

Field Name	Details
	Description Indicates whether the account's <code>Ownership</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongPhone</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>Phone</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongSic</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>Sic</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongSicDescription</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>SicDescription</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongTickerSymbol</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>TickerSymbol</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongTradestyle</code>	Type boolean Properties Filter, Update

Field Name	Details
	Description Indicates whether the account's <code>Tradestyle</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongWebsite</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>Website</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongYearStarted</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>YearStarted</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsInactive</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the account has been reported to Data.com as <i>Inactive</i> (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedAccountSite</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>AccountSite</code> field value is in a Reviewed state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedAddress</code>	Type boolean Properties Filter, Update

Field Name	Details
	Description Indicates whether the account's <code>Address</code> field value is in a <code>Reviewed</code> state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedAnnualRevenue</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>AnnualRevenue</code> field value is in a <code>Reviewed</code> state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedCompanyName</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>CompanyName</code> field value is in a <code>Reviewed</code> state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedDandBCompanyDunsNumber</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>DandBCompanyID</code> field value is in a <code>Reviewed</code> state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedDescription</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>Description</code> field value is in a <code>Reviewed</code> state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedDunsNumber</code>	Type boolean Properties Filter, Update

Field Name	Details
	Description Indicates whether the account's <code>DunsNumber</code> field value is in a Reviewed state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedFax</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>Fax</code> field value is in a Reviewed state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedIndustry</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>Industry</code> field value is in a Reviewed state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedNaicsCode</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>NaicsCode</code> field value is in a Reviewed state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedNaicsDescription</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>NaicsDescription</code> field value is in a Reviewed state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedNumberOfEmployees</code>	Type boolean Properties Filter, Update

Field Name	Details
	Description Indicates whether the account's <code>NumberOfEmployees</code> field value is in a Reviewed state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedOwnership</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>Ownership</code> field value is in a Reviewed state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedPhone</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>Phone</code> field value is in a Reviewed state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedSic</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>Sic</code> field value is in a Reviewed state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedSicDescription</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>SicDescription</code> field value is in a Reviewed state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedTickerSymbol</code>	Type boolean Properties Filter, Update

Field Name	Details
	Description Indicates whether the account's <code>TickerSymbol</code> field value is in a Reviewed state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedTradestyle</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>Tradestyle</code> field value is in a Reviewed state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedWebsite</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>Website</code> field value is in a Reviewed state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedYearStarted</code>	Type boolean Properties Filter, Update Description Indicates whether the account's <code>YearStarted</code> field value is in a Reviewed state (<code>true</code>) or not (<code>false</code>).
<code>LastMatchedDate</code>	Type dateTime Properties Filter, Sort Description The date the account record was last matched and linked to a Data.com record.
<code>LastStatusChangedById</code>	Type reference Properties Filter, Group, Nillable, Sort Description The ID of who or what last changed the record's <code>Clean Status</code> field value: a Salesforce user or a Clean job.

Field Name	Details
LastStatusChangedDate	Type dateTime Properties Filter, Nillable, Sort Description The date on which the record's <code>Clean Status</code> field value was last changed.
Latitude	Type double Properties Filter, Nillable, Sort Description Used with <code>Longitude</code> to specify the precise geolocation of a billing address. Data not currently provided.
Longitude	Type double Properties Filter, Nillable, Sort Description Used with <code>Latitude</code> to specify the precise geolocation of a billing address. Data not currently provided.
NaicsCode	Type string Properties Filter, Group, Nillable, Sort Description The six-digit North American Industry Classification System (NAICS) code is the standard used by business and government to classify business establishments into industries, according to their economic activity for the purpose of collecting, analyzing, and publishing statistical data related to the U.S. business economy.
NaicsDescription	Type string Properties Filter, Group, Nillable, Sort Description A brief description of an organization's line of business, based on its NAICS code.
Name	Type string

Field Name	Details
	Properties Filter, Group, Sort, Update Description Field label is Account Clean Info Name. The name of the account. Maximum size is 255 characters.
NumberOfEmployees	Type int Properties Filter, Group, Nillable, Sort Description The number of employees working at the account.
Ownership	Type picklist Properties Filter, Group, Nillable, Sort Description Ownership type for the account, for example Private, Public, or Subsidiary.
Phone	Type phone Properties Filter, Group, Nillable, Sort Description The phone number for the account.
PostalCode	Type string Properties Filter, Group, Nillable, Sort Description Details for the billing address of the account.
Sic	Type string Properties Filter, Group, Nillable, Sort Description Standard Industrial Classification code of the company's main business categorization, for example, 57340 for Electronics.

Field Name	Details
SicDescription	Type string Properties Filter, Group, Nillable, Sort Description A brief description of an organization's line of business, based on its SIC code.
State	Type string Properties Filter, Group, Nillable, Sort Description Details for the billing address of the account.
Street	Type textarea Properties Filter, Group, Nillable, Sort Description Details for the billing address of the account.
TickerSymbol	Type string Properties Filter, Group, Nillable, Sort Description The stock market symbol for the account.
Tradestyle	Type string Properties Filter, Group, Nillable, Sort Description A name, different from its legal name, that an organization can use for conducting business. Similar to "Doing business as" (DBA).
Website	Type url Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description The website of the account.
YearStarted	Type string Properties Filter, Group, Nillable, Sort Description The year the company was established or the year when current ownership or management assumed control of the company.

Usage

Administrators can modify a limited set of AccountCleanInfo fields from the Account Clean Info page.

Developers can create triggers that read the Account Clean Info fields to help automate the cleaning or related processing of account records. For example, you might create a trigger that reads the `Clean Status` field on the Account object. If an account record's `Clean Status` field value is `Different` but the record has no `Billing Street` value, the trigger could update the record's status to `Not Compared`.

Create triggers that read AccountCleanInfo fields to help automate the cleaning or related processing of account records. For example:

- Keep account records' status `InSync` if the only difference from matched records is the `Phone` format (for example, `(415) 353-8000` on the account record versus `415 353 8000` on the matched Data.com record).

```
trigger AccountPhoneTrigger on Account (before update) {

    for (Account account: Trigger.new) {
        Account oldAccount = Trigger.oldMap.get(account.ID);
        if (account.CleanStatus == 'Different') {
            List <AccountCleanInfo> cleanInfo = [Select Id, IsDifferentPhone,
            IsReviewedPhone, Phone from AccountCleanInfo where AccountId = :account.Id];
            if (cleanInfo.size() > 0 && cleanInfo[0].IsDifferentPhone &&
            cleanInfo[0].Phone.StartsWith('+')) {
                // if Data.com phone number is marked Different but starts with '+',
            ignore this
                // and set the status to "Reviewed"
                AccountCleanInfo cleanInfoToUpdate = new AccountCleanInfo();
                cleanInfoToUpdate.Id = cleanInfo[0].Id;
                cleanInfoToUpdate.IsReviewedPhone = true;
                update cleanInfoToUpdate;
                account.CleanStatus = 'Reviewed';
            }
        }
    }
}
```

- Create a customized set of `Industry` field values for accounts. Use triggers to map values from fields on imported or cleaned records onto a standard set of values.

- Read the `CleanStatus` field value on the Account object. If that value is `Different`, but a Salesforce record has no street address value, update the record's status to `Not Compared`.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AccountCleanInfoChangeEvent](#) (API version 62.0)

Change events are available for the object.

AccountContactRole

Represents the role that a Contact plays on an Account.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
<code>AccountId</code>	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the Account. This is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
<code>ContactId</code>	Type reference

Field	Details
	Properties Create, Filter, Group, Sort, Update Description Required. ID of the Contact associated with this account. This is a relationship field. Relationship Name Contact Relationship Type Lookup Refers To Contact
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
IsPrimary	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Specifies whether the Contact plays the primary role on the Account (<code>true</code>) or not (<code>false</code>). Note that each account has only one primary contact role. Label is Primary. Default value is <code>false</code>.
Role	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Name of the role played by the Contact on this Account, such as Decision Maker, Approver, Buyer, and so on. Must be unique—there can't be multiple records in which the <code>AccountId</code>, <code>ContactId</code>, and <code>Role</code> values are identical. Different contacts can play the same role on the same account. A contact can play different roles on the same account.

Usage

Use this object to define the role that a Contact plays on a given Account within the context of a specific Opportunity.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AccountContactRoleChangeEvent (API version 44.0)

Change events are available for the object.

SEE ALSO:

[Account](#)

[Contact](#)

AccountInsight

Represents an individual insight (a key business development) related to an account record.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

To see an insight related to a specific account, users need a Sales Cloud Einstein license and access to the account record. As of the Spring '20 release, Pardot and Sales Engagement users no longer have access to this object.

Fields

Field Name	Details
<code>AccountId</code>	Type reference Properties Filter, Group, Sort Description ID of the related account record.
<code>ActualHeardWithinDays</code>	Type int Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description Reserved for future use.
CompetitorName	Type string Properties Filter, Group, Nillable, Sort Description This field has been deprecated as of API version 45.0.
ContactName	Type string Properties Filter, Group, Nillable, Sort Description This field is not in use as of API version 46.0.
ContactTitle	Type string Properties Filter, Group, Nillable, Sort Description This field is not in use as of API version 46.0.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
Division	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The division of the related record.
ExpectedHeardWithinDays	Type int

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description Reserved for future use.
LastHeard	Type dateTime Properties Filter, Nillable, Sort Description Reserved for future use.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
NumberOfNewsArticles	Type int Properties Filter, Group, Nillable, Sort Description The number of news articles related to insights of type M&A activity detected, Company is expanding, and Leadership changes.
Rationale	Type string Properties Filter, Group, Nillable

Field Name	Details
	Description The explanation for an insight, providing more background information and details that are specific to the org.
Title	Type string Properties Filter, Group, Nillable Description The title of the insight.
TrendType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The trend type of the insight. Possible values include: - Negative - Positive - Informational
Type	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of insight. Possible values include: - M&A activity detected - Company is expanding - Leadership changes

Usage

This object is read-only and isn't supported with workflows, triggers, or process builder.

AccountOwnerSharingRule

Represents the rules for sharing an account with a User other than the owner.



Note: To programmatically update owner sharing rules, we recommend that you use Metadata API. Contact Salesforce customer support to enable access to this object for your org.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
<code>AccountAccessLevel</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Update Description A value that represents the type of sharing being allowed. The possible values are: • Read • Edit • All (This value isn't valid for creating or updating.)
<code>CaseAccessLevel</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A value that represents the type of access granted to the target Group for all child cases. The possible values are: • None • Read • Edit
<code>ContactAccessLevel</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description A value that represents the type of access granted to the target Group, UserRole, or User for any associated contacts. The possible values are: • None • Read

Field	Details
	Edit  Note: When DefaultContactAccess is set to Controlled by Parent, you can't create or update this field.
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description A description of the sharing rule. Maximum size is 1000 characters. This field is available in API version 29.0 and later.
DeveloperName	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Corresponds to Rule Name in the user interface. This field is available in API version 24.0 and later.  Note: When creating large sets of data, always specify a unique DeveloperName for each record. If no DeveloperName is specified, performance may slow while Salesforce generates one for each record.
GroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the source group. An Account owned by a User in the source Group triggers the rule to give access.
OpportunityAccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description A value that represents the type of access granted to the target Group for any associated Opportunity. The possible values are: • None • Read • Edit
Name	Type string Properties Create, Filter, Group, Sort, Update Description Label of the sharing rule as it appears in the user interface. Limited to 80 characters. Corresponds to Label on the user interface.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the User or Group being granted access.

Usage

Use this object to manage the sharing rules for accounts. General sharing and territory management-related sharing use this object. For example, the following code creates an account owner sharing rule between two public groups, which can also contain portal users.

```
AccountOwnerSharingRule rule = new AccountOwnerSharingRule();
rule.setName("RuleName"); // Set the sharing rule name
rule.setDeveloperName("RuleDeveloperName"); // Set the sharing rule developer name
rule.setGroupId("00Gx0000000000"); // Set the group of users to share records from
rule.setUserOrGroupId("00Gx00000000001"); // Set the group of users to share records to
rule.setAccountAccessLevel("Edit");
rule.setOpportunityAccessLevel("Read");
rule.setCaseAccessLevel("None");
connection.create(rule);
```

 **Note:** The original territory management feature is now unavailable. For more information, see [The Original Territory Management Module Will Be Retired in the Summer '21 Release](#). The information in this topic applies to the original territory management feature only, and not to Enterprise Territory Management.

SEE ALSO:

[Account](#)

[AccountShare](#)

[Metadata API Developer Guide: SharingRules](#)

AccountPartner

This object represents a partner relationship between two Account records. An AccountPartner record is created automatically when a Partner record is created for a partner relationship between two accounts. An AccountPartner record is also created automatically between an account and an opportunity's account when a Partner record is created between an account and an opportunity.

 **Note:** This object is completely distinct from and independent of Account records that have been enabled for the partner portal.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
AccountFromId	Type reference Properties Create, Filter, Group, Sort Description ID of the main Account in the partner relationship. This is a relationship field. Relationship Name AccountFrom Relationship Type Lookup Refers To Account

Field	Details
AccountToId	Type reference Properties Create, Filter, Group, Sort Description ID of the partner Account in the partner relationship. This is a relationship field. Relationship Name AccountTo Relationship Type Lookup Refers To Account
IsPrimary	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether the AccountPartner is the primary partner of an opportunity (<code>true</code>). When there are no corresponding Opportunity Partner records, the value is <code>false</code>.
OpportunityId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the opportunity in a partner relationship. This is a relationship field. Relationship Name Opportunity Relationship Type Lookup Refers To Opportunity
ReversePartnerId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description ID of the reciprocal AccountPartner record in a partner relationship.
Role	Type picklist Properties Create, Filter, Group, Nillable, Sort Description The UserRole that the partner Account has on the main Account. For example, Consultant or Distributor.

Creating an Account-Account Partner Relationship

When you create a partner relationship between two accounts (when you create a Partner record and specify the `AccountFromId`), the API automatically creates two AccountPartner records, one for the forward relationship and one for the reverse. For example, if you create a Partner relationship with "Acme, Inc." as the `AccountFromId` and "Acme Consulting" as the `AccountToId`, the API automatically creates two AccountPartner records:

- The forward relationship AccountPartner with "Acme, Inc." as the `AccountFromId` and "Acme Consulting" as the `AccountToId`.
- The reverse relationship AccountPartner with "Acme Consulting" as the `AccountFromId` and "Acme, Inc." as the `AccountToId`.
- The value of the Role field in the reverse relationship AccountPartner is set to the PartnerRole record `ReverseRole` value associated with the value of the `Role` field in the forward relationship AccountPartner.

This mapping allows the API to manage the records and their relationships efficiently.

SEE ALSO:

[Partner](#)

[OpportunityPartner](#)

AccountPlan

Represents customer information with measurable objectives and executable steps to proactively manage and grow customer relationships. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

This object is available if sales account plans are turned on.

Fields

Field	Details
AccountChallenges	Type textarea Properties Create, Nillable, Update Description The key obstacles to the growth of the account.
AccountCmptvWeaknesses	Type textarea Properties Create, Nillable, Update Description The shortcomings that hinder the account's ability to outperform competitors in the market.
AccountCompetitiveStrengths	Type textarea Properties Create, Nillable, Update Description The abilities of the account to outperform their competitors in the market.
AccountCompetitors	Type textarea Properties Create, Nillable, Update Description The businesses or companies that offer similar products or services and compete for the same target market as the account.
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The Account record. This field is a relationship field. Relationship Name Account

Field	Details
	Refers To Account
AccountIndustryTrends	Type textarea Properties Create, Nillable, Update Description The shifts in the pattern of the industry that are specific to the account.
AccountInternalRiskRating	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The rating that's assigned to assess the risk level of the account. To access this field, you must have an FSC Sales or a Financial Services Cloud Extension license.
AccountPrfmIndicators	Type textarea Properties Create, Nillable, Update Description The key performance indicators used by the account to measure the success and effectiveness of a product or service.
AccountStrategicPriorities	Type textarea Properties Create, Nillable, Update Description The key priorities of the account.
AccountVision	Type textarea Properties Create, Nillable, Update Description The long-term value statement of the account.
CallingStrategy	Type textarea

Field	Details
	Properties Create, Nillable, Update Description How frequently the relationship team meets with the account. To access this field, you must have an FSC Sales or a Financial Services Cloud Extension license.
CallingStrategyNotes	Type textarea Properties Create, Nillable, Update Description The outline of the format and organization of account meetings. To access this field, you must have an FSC Sales or a Financial Services Cloud Extension license.
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The end date of the account plan.
FlexCard	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The Omnistudio FlexCard. To access this field, you must have an FSC Sales or a Financial Services Cloud Extension license.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly. For example, accessed through a list view or related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last viewed this record or list view. If this value is null, and <code>LastReferenceDate</code> isn't null, the user accessed this record or list view indirectly.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the account plan.
Notes	Type textarea Properties Create, Nillable, Update Description The notes or observations for the account plan.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the account plan. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
RelationshipOpportunities	Type textarea Properties Create, Nillable, Update Description The list of sales or potential deal opportunities in the relationship with the account.
RelationshipStrengths	Type textarea Properties Create, Nillable, Update

Field	Details
	Description The strengths in the relationship with the account.
RelationshipSummary	Type textarea Properties Create, Nillable, Update Description A concise overview of the relationship dynamics with the account. To access this field, you must have an FSC Sales or a Financial Services Cloud Extension license.
RelationshipThreats	Type textarea Properties Create, Nillable, Update Description The possible concerns in the relationship with the account.
RelationshipWeaknesses	Type textarea Properties Create, Nillable, Update Description The shortcomings in the relationship with the account.
StartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The start date of the account plan.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Specifies the status of the account plan. Possible values are: • Active • Inactive

Field	Details
	Not Started The default value is Not Started.

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AccountPlanChangeEvent

Change events are available for the object.

AccountPlanHistory

History is available for tracked fields of the object.

AccountPlanOwnerSharingRule

Sharing rules are available for the object.

AccountPlanShare

Sharing is available for the object.

AccountPlanObjective

Represents strategic objectives or initiatives pursued by a relationship team with a customer to enhance customer engagement and satisfaction. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available if sales account plans are turned on.

Fields

Field	Details
AccountPlanId	Type reference Properties Create, Filter, Group, Sort Description The account plan associated with the objective. This field is a relationship field.

Field	Details
	Relationship Name AccountPlan Relationship Type Master-detail Refers To AccountPlan
AccountPlanObjCategoryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The category associated with the account plan objective. To access this field, you must have an FSC Sales or a Financial Services Cloud Extension license. This field is a relationship field. Relationship Name AccountPlanObjCategory Refers To AccountPlanObjectiveCategory
Description	Type textarea Properties Create, Nillable, Update Description The description of the account plan objective.
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The end date of the account plan objective.
ExternalStakeholderId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The customer stakeholder contact associated with the account plan objective. The relationship team collaborates with the customer stakeholder to achieve a specific objective. To access this field, you must have an FSC Sales or a Financial Services Cloud Extension license. This field is a relationship field. Relationship Name ExternalStakeholder Refers To Contact
LastInteractionSumGenDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date when the most recent interaction summary was generated using Einstein Generative AI. To access this field, you must have an FSC Sales or a Financial Services Cloud Extension license.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the account plan objective.

Field	Details
ObjectiveInteractionSummary	Type textarea Properties Create, Nillable, Update Description The summary of interactions that occur with the account in relation to the account plan objective. To access this field, you must have an FSC Sales or a Financial Services Cloud Extension license.
ObjectiveOwnerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The owner user associated with the objective. This field is a relationship field. Relationship Name ObjectiveOwner Refers To User
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the user who created the record. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
Priority	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the level of importance placed on achieving the objective associated with the account plan. To access this field, you must have an FSC Sales or a Financial Services Cloud Extension license.

Field	Details
	Possible values are: • High • Low • Medium
StartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The start date of the account plan objective.
Status	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the status of the account plan objective. Possible values are: • Closed • In Progress • New

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AccountPlanObjectiveChangeEvent](#) on page 68

Change events are available for the object.

[AccountPlanObjectiveHistory](#) on page 63

History is available for tracked fields of the object.

[AccountPlanObjectiveOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[AccountPlanObjectiveShare](#) on page 67

Sharing is available for the object.

AccountPlanObjectiveMeasure

Represents the performance of target metrics for an objective associated with the account plan. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available if sales account plans are turned on.

Fields

Field	Details
AccountPlanObjMeasCalcDefId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The account plan objective calculation definition associated with the measure. This field is a relationship field. Available in API version 63.0 and later. Relationship Name AccountPlanObjMeasCalcDef Refers To AccountPlanObjMeasCalcDef
AccountPlanObjectiveId	Type reference Properties Create, Filter, Group, Sort Description The account plan objective associated with the measure. This field is a relationship field. Relationship Name AccountPlanObjective Relationship Type Master-detail Refers To AccountPlanObjective
CurrentCurrencyValue	Type currency Properties Filter, Nillable, Sort

Field	Details
	Description The current value in currency for a measure associated with the account plan objective.
CurrentNumberValue	Type double Properties Filter, Nillable, Sort Description The current numerical value for a measure associated with the account plan objective.
CurrentPercentValue	Type percent Properties Filter, Nillable, Sort Description The current value in percentage for a measure associated with the account plan objective.
CurrentValue	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The current value for a measure associated with the account plan objective.
CurrentValueTimestamp	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the current value was last updated. This field is available in API version 63.0 and later.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the account plan objective measure.
TargetCurrencyValue	Type currency Properties Filter, Nillable, Sort Description The target value in currency for a measure associated with the account plan objective.
TargetNumberValue	Type double Properties Filter, Nillable, Sort Description The target numerical value for a measure associated with the account plan objective.
TargetPercentValue	Type percent Properties Filter, Nillable, Sort Description The target value in percentage for a measure associated with the account plan objective.
TargetValue	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The target value for a measure associated with the account plan objective.

Field	Details
ValueType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the type of value that's measured. Possible values are: • Currency • Number • Percent

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AccountPlanObjectiveMeasureChangeEvent](#) on page 68

Change events are available for the object.

[AccountPlanObjectiveMeasureHistory](#) on page 63

History is available for tracked fields of the object.

AccountPlanObjMeasCalcCond

Represents a field and value combination for filtering records to include in the calculation of a sales account plan objective measure's current value. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

This object is available if sales account plans are turned on.

Fields

Field	Details
AccountPlanObjMeasCalcDefId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort Description The account plan objective measure calculation definition where this criteria is used. This field is a relationship field. Relationship Name AccountPlanObjMeasCalcDef Relationship Type Master-detail Refers To AccountPlanObjMeasCalcDef
FieldName	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A field on the calculation definition's <code>TargetObject</code> that you want to filter by. Fields on the Campaign, Case, Contact, or Opportunity objects are supported.
Operation	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The logical operator for matching records with the specified field value. Possible values are: • Contains • Equals • GreaterOrEqual • GreaterThan • LessOrEqual • LessThan • NotContain • NotEqual • StartsWith
Value	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The value to match for the specified field.

Usage

Let's say that a calculation definition tracks the currency amount on Closed Won opportunities. The calculation definition's `TargetObject` is `Opportunity`, and the condition further specifies these values.

- `FieldName` is `StageName`.
- `Operation` is `Equals`.
- `Value` is `ClosedWon`.

AccountPlanObjMeasCalcDef

Represents the definition of a target object, rollup field, and logic for calculating the current value of a sales account plan objective measure. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

This object is available if sales account plans are turned on.

Fields

Field	Details
Description	Type textarea
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description A summary of the calculation definition that's visible to users when they select the definition for an account plan objective measure.
DeveloperName	Type string

Field	Details
	Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. The name: • must be 40 characters or fewer • must begin with a letter • can contain only underscores and alphanumeric characters • can't include spaces • can't end with an underscore • can't contain 2 consecutive underscores
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The combined language and locale ISO code, which controls the language of the calculation definition.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Label for this calculation definition. This display value is the internal label that doesn't get translated.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of these values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This

Field	Details
	field's value is the namespace prefix of the Developer Edition org of the package developer. In orgs that aren't Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
RollupType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The method for calculating the account plan objective measure's current value from records that match the calculation definition and any optional conditions. Possible values are: - Count - Max - Min - Sum In Setup, this field's label is Calculation Type.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Possible values are: - Active - Draft - Inactive Only active calculation definitions are available for users to select when they specify an account plan objective measure.
TargetField	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The field on <code>TargetObject</code> to use for calculating the account plan objective measure's current value. Rollup fields on the Campaign, Case, Contact, or Opportunity object are supported. In Setup, this field's label is Rollup Field.

Field	Details
TargetObject	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The object to use for calculating the account plan objective measure's current value. Possible values are: • Campaign • Case • Contact • Opportunity
ValueType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The data type for calculating the account plan objective measure's current value. Possible values are: • Currency • Number • Percent

Usage

Let's say that a calculation definition tracks the currency amount on opportunities. The calculation definition's `TargetObject` is `Opportunity`, `TargetField` is `Amount`, and `RollupType` is `Sum`.

AccountPlanObjMeasCalcDefLocalization

Represents the translated value of the definition of a target object, rollup field, and logic for calculating the current value of a sales account plan objective measure. This object is available in API version 63.0 and later when the Translation Workbench is enabled.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

- Your organization must be using Lightning Experience with Sales Cloud in Enterprise, Performance, Unlimited, and Einstein 1 Sales Edition editions.
- Translation Workbench must be enabled for your org.
- Sales account plans must be turned on.
- Users with the Customize Application or Manage Translation permission can create or update AccountPlanObjMeasCalcDef translations.

Fields

Field	Details
Language	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The language the AccountPlanObjMeasCalcDef is translated into.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of these values. • In Developer Edition orgs, NamespacePrefix is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that aren't Developer Edition orgs, NamespacePrefix is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
ParentId	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description The ID of the related account plan objective measure calculation definition. This field is a relationship field.
Value	Type textarea Properties Create, Filter, Sort, update Description The translated label of the account plan objective measure calculation definition.

Usage

Translate the labels of your account plan objective measure calculation definitions for supported languages .

AccountPlanObjMeasRela

Represents a junction between an account plan objective measure and the related objects. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Fields

Field	Details
AccountPlanObjectiveMeasureId	Type reference Properties Create, Filter, Group, Sort Description The account plan objective measure associated with the record. This field is a relationship field. Relationship Name AccountPlanObjectiveMeasure Relationship Type Master-detail

Field	Details
	Refers To AccountPlanObjectiveMeasure (the master object)
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the account plan objective measure relation record.
ReferenceRecordId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The record of the object associated with the account plan objective measure. This field is a polymorphic relationship field. Relationship Name ReferenceRecord Refers To Case, FinancialDeal, Opportunity

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AccountPlanObjMeasRelaChangeEvent on page 68

Change events are available for the object.

AccountPlanObjMeasRelaHistory on page 63

History is available for tracked fields of the object.

AccountRelationship

Represents a relationship of a given type between two accounts. This object is available in API version 45.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

In Digital Experience Settings, turn on the Enable Account Relationships org preference, which is off by default.

Fields

Field	Details
AccountFromID	Type reference Properties Create, Filter, Group, Sort, Description ID of the account that gains access to data from <code>AccountTo</code>.
AccountToId	Type reference Properties Create, Filter, Group, Sort Description ID of the account sharing data with <code>AccountFrom</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user accessed this record or list view (<code>LastReferencedDate</code>) but didn't viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the account relationship.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the user who created the account relationship.
Type	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort Description The relationship type. All account relationship sharing rules of that type are to this account relationship. Standard values are: • System Integrator • Agency • Advertiser • Reseller • Distributor • Developer • Broker • Lender • Institution • Contractor

Field	Details
	• Dealer • Consultant • Client • Vendor • Agent • Retailer • SubContractor • Supplier Picklist items can be updated with your own values.

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

[AccountRelationshipFeed](#)

Feed tracking is available for the object.

[AccountRelationshipHistory](#)

History is available for tracked fields of the object.

[AccountRelationshipOwnerSharingRule](#)

Sharing rules are available for the object.

[AccountRelationshipShare](#)

Sharing is available for the object.

AccountRelationshipShareRule

Represents the rule that determines which object records are shared, how they are shared, the account relationship type that shares the records, and the level of access granted to the records. This object is available in API version 45.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout().describeSObjects()`, `query()`, `retrieve()`, `update().upsert()`

Fields

Field	Details
<code>AccessLevel</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description Type of access granted by the share rule. Valid values are: • Read (Read Only) • Edit (Read/Write)
AccountToCriteriaField	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Criteria that must be met for the data to be shared. Possible values are: • Account.OwnerId • Account.ParentId • Campaign.OwnerId • Case.AccountId • Case.OwnerId • Contact.AccountId • Contact.OwnerId • Lead.ConvertedAccountId • Lead.OwnerId • Lead.PartnerAccountId • Opportunity.PartnerAccountId • Order.AccountId • Order.ActivatedById • Order.CompanyAuthorizedById • Order.OwnerId • PartnerFundAllocation.CreatedById • PartnerFundAllocation.ChannelPartnerId • PartnerFundAllocation.OwnerId • PartnerFundClaim.CreatedById • PartnerFundClaim.OwnerId • PartnerFundRequest.ChannelPartnerId • PartnerFundRequest.CreatedById • PartnerFundRequest.OwnerId • PartnerMarketingBudget.CreatedById • PartnerMarketingBudget.ChannelPartnerId • PartnerMarketingBudget.OwnerId

Field	Details
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description A meaningful explanation of the sharing rule.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the record in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. This field is automatically generated but you can supply your own value if you create the record using the API.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance may slow while Salesforce generates one for each record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
EntityType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of data shared by this rule. Values are: • Account • Campaign • Case • Contact • Lead • Order • PartnerFundAllocation • PartnerFundClaim • PartnerFundRequest • PartnerMarketingBudget

Field	Details
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the account relationship share rule.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The label assigned to the sharing rule to identify it.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, NamespacePrefix is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, NamespacePrefix is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
StaticFormulaCriteria	Type string Properties Create, Filter, Nillable, Sort, Update Description A way to further filter what data gets shared. This must be a deterministic formula and spanning is not allowed.

Field	Details
Type	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update
	Description Must match the type of an account relationship for data to be shared according to the <code>AccountToCriteriaField</code> and the <code>StaticFormulaCriteria</code> .

AccountShare

Represents a sharing entry on an account.

You can only create, edit, and delete sharing entries for standard objects whose `RowCause` field is set to `Manual`. Sharing entries for standard objects with different `RowCause` values are created as a result of your Salesforce org's sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren't stored at all.



Note: While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it's possible that we'll stop storing certain share records to improve performance. As a best practice, don't create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, only users with access to the Account object can access this object. Customer Portal users can't access this object.

Fields

The properties available for some fields depend on the default org-wide sharing settings. The properties listed are true for the default settings of such fields.

Field	Details
<code>AccountAccessLevel</code>	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update
	Description Level of access that the User or Group has to the Account. The possible values are: Read

Field	Details
	- Edit - All (This value isn't valid for create or update calls.) This field must be set to an access level that is at least equal to the organization's default Account access level. In addition, either this field, the <code>OpportunityAccessLevel</code> field, or the <code>CaseAccessLevel</code> field must be set higher than the organization's default access level.
AccountId	Type reference Properties Create, Filter, Group, Sort Description ID of the Account associated with this sharing entry. This field can't be updated. This is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
CaseAccessLevel	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Level of access that the User or Group has to cases associated with the account. The possible values are: - None - Read - Edit This field must be set to an access level that is at least equal to the organization's default <code>CaseAccessLevel</code>. This field can't be updated via the API if the <code>AccountAccessLevel</code> field is set to All. You can't update this field for the associated account owner via the API. You must update the account owner's <code>CaseAccessLevel</code> via the Salesforce user interface.
ContactAccessLevel	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description Level of access that the User or Group has to contacts associated with the account. The possible values are: • None • Read • Edit This field must be set to an access level that is at least equal to the organization's default <code>ContactAccessLevel</code>. This field can't be updated via the API if the <code>ContactAccessLevel</code> field is set to "Controlled by Parent." You can't update this field for the associated account owner using the API. You must update the account owner's <code>ContactAccessLevel</code> via the Salesforce user interface.
OpportunityAccessLevel	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Level of access that the User or Group has to opportunities associated with the Account. The possible values are: • None • Read • Edit This field must be set to an access level that is at least equal to the organization's default opportunity access level. This field can't be updated via the API if the <code>AccountAccessLevel</code> field is set to <code>All</code>. You can't use the API to update this field for the associated Account owner. You must update the Account owner's <code>OpportunityAccessLevel</code> via the Salesforce user interface.
RowCause	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is <code>Manual</code>. If no value is specified, the field defaults to <code>Manual</code>. All other <code>RowCause</code> values are read-only. After the sharing entry is created, this field can't be edited. Valid values include: • <code>Manual</code>—The User or Group has access because a User with "All" access manually shared the Account with the user or group. • <code>Owner</code>—The User is the owner of the Account • <code>Team</code>—The User or Group has team access (is an <code>AccountTeamMember</code>).

Field	Details
	• Rule—The User or Group has access via an Account sharing rule. • GuestRule—The user or group has access via an Account guest user sharing rule. • ImplicitParent—The User or Group has access because they're the owner of or have sharing access to records related to the account, such as opportunities, cases, contacts, contracts, or orders. • GuestParentImplicit—The guest user has access because they have access to records related to the Account, such as opportunities, cases, contacts, contracts, or orders. • LpuParentImplicit—The User has access because they have access to records related to the Account, which are owned by high-volume Experience Cloud site users and shared via a share group. • LpuImplicit—The User has access to records owned by high-volume Experience Cloud site users via a share group. • PortalImplicit—The Account is associated with the portal user. • ARImplicit—The User, who belongs to a partner or customer account, has access to the Account via an account relationship data sharing rule. • Territory2AssociationManual—With Sales Territories in API version 44.0 and earlier, the TerritoryManual reason code was written to AccountShare records when you manually assigned an account to a territory. In API version 45.0 and later, Territory2AssociationManual replaces all instances of TerritoryManual, and the Territory2AssociationManual reason code is written to AccountShare records when you manually assign an account to a territory. • Territory—The territory has access via a territory assignment rule. • TerritoryManual—Deprecated starting in API version 45.0 and replaced by the Territory2AssociationManual value.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the User or Group that has been given access to the Account. This field can't be updated. This is a polymorphic relationship field. Relationship Name UserOrGroup Relationship Type Lookup Refers To Group, User

Usage

This object allows you to determine which users and groups can view or edit Account records owned by other users.

If you attempt to create an AccountShare record that matches an existing record, the request updates any modified fields and returns the existing record.

For example, the following code finds all accounts owned by a user and manually shares them to a portal user.

```
QueryResult result = conn.query("SELECT Id FROM Account WHERE OwnerId = '005D0000001LPFB'");
// Create a new AccountShare object
List<AccountShare> shares = new ArrayList<AccountShare>();
for (SObject rec : result.getRecords()) {
    AccountShare share = new AccountShare();
    share.setAccountId(rec.getId());
    //Set the portal user Id to share the accounts with
    share.setUserOrGroupId("003D000000QA8T1");
    share.setAccountAccessLevel("Edit");
    share.setOpportunityAccessLevel("Read");
    share.setCaseAccessLevel("Edit");
    shares.add(share);
}
conn.create(shares.toArray(new AccountShare[shares.size()]));
```

This code shares the accounts that the user owns at the time, but not those accounts that are owned later. For these types of shares, use an owner-based sharing rule, such as [AccountOwnerSharingRule](#).

If an account is shared in multiple ways with a user, you don't always see multiple sharing records. If a user has access to an account for one or more of the following RowCause values, the records in the AccountShare object are compressed into one record with the highest level of access.

- ImplicitParent
- Manual
- Owner

SEE ALSO:

[Account](#)

[CaseShare](#)

[LeadShare](#)

[OpportunityShare](#)

AccountTag

Associates a word or short phrase with an Account.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
ItemId	Type reference Properties Create, Filter Description ID of the tagged item.
Name	Type string Properties Create, Filter Description Name of the tag. If this value does not already exist, a new TagDefinition is created and becomes the parent of this Tag object. Otherwise, a TagDefinition with the same name becomes the parent of this Tag object. Parent relationships are created automatically.
TagDefinitionId	Type reference Properties Filter Description ID of the parent TagDefinition object that owns the tag.
Type	Type picklist Properties Create, Filter, Restricted picklist Description Defines the visibility of a tag. Valid values: • Public—The tag can be viewed and manipulated by all users in an organization. • Personal—The tag can be viewed or manipulated only by a user with a matching OwnerId.

Usage

AccountTag stores the relationship between its parent TagDefinition and the Account being tagged. Tag objects act as metadata, allowing users to describe and organize their data.

When a tag is deleted, its parent TagDefinition will also be deleted if the name is not being used; otherwise, the parent remains. Deleting a TagDefinition sends it to the Recycle Bin, along with any associated tag entries.

AccountTeamMember

Represents a User who is a member of an Account team.

See also UserAccountTeamMember, which represents a User who is on the default account team of another user.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

- This object is available only for Enterprise, Unlimited, and Performance Edition users who have enabled the account team functionality.
- Customer Portal users can't access this object.

Fields

Field Name	Details
AccountAccessLevel	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Level of access that the User has to the Account. The possible values are: • Read • Edit • All This field must be set to an access level that is at least equal to the organization's default Account access level. In addition, the users's AccountAccessLevel, ContactAccessLevel, OpportunityAccessLevel, or CaseAccessLevel field must be set higher than the organization's default access level.
AccountId	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the Account to which this user is a team member. Must be a valid account ID.

Field Name	Details
CaseAccessLevel	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Level of access that the User has to cases associated with the account. The possible values are: • None • Read • Edit This field must be set to an access level that is at least equal to the organization's default case access level. In addition, the users's AccountAccessLevel, ContactAccessLevel, OpportunityAccessLevel, or CaseAccessLevel field must be set higher than the organization's default access level. This field is available in API version 37.0 and later.
ContactAccessLevel	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Level of access that the User has to contacts associated with the account. The possible values are: • None • Read • Edit • Controlled By Parent This field must be set to an access level that is at least equal to the organization's default contact access level. In addition, the users's AccountAccessLevel, ContactAccessLevel, OpportunityAccessLevel, or CaseAccessLevel field must be set higher than the organization's default access level. If the org-wide default for contacts is set to Controlled By Parent, users can't see or edit the Contact Access field. This field is available in API version 37.0 and later.
CurrencyIsoCode	Type picklist Properties Filter, Restricted picklist Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the org.

Field Name	Details
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.  Note: An AccountTeamMember record that is deleted is not moved to the Recycle Bin. A deleted AccountTeamMember record can't be undeleted unless the record was cascade-deleted when deleting a related Account. For directly deleted AccountTeamMember records, don't use the <code>isDeleted</code> field to detect deleted records in SOQL queries or <code>queryAll()</code> calls. The <code>getDeleted()</code> call also doesn't show deleted account team members unless the record was deleted from an account related list or the Developer Console.
OpportunityAccessLevel	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Level of access that the User has to opportunities associated with the account. The possible values are: • None • Read • Edit This field must be set to an access level that is at least equal to the organization's default opportunity access level. In addition, the users's <code>AccountAccessLevel</code>, <code>ContactAccessLevel</code>, <code>OpportunityAccessLevel</code>, or <code>CaseAccessLevel</code> field must be set higher than the organization's default access level. This field is available in API version 37.0 and later.
PhotoURL	Type URL Properties Filter, Nillable, Sort, Group Description Read only. Retrieves the users Chatter photo URL. This field is available in API version 37.0 and later.
TeamMemberRole	Type picklist

Field Name	Details
	Properties Create, Filter, Nillable, Update Description Role associated with this team member. One of the valid team member roles defined for your organization. Label is Team Role .
Title	Type string Properties Filter, Nillable, Sort, Group Description Read only. Retrieves the user's title. This field is available in API version 37.0 and later.
UserId	Type reference Properties Create, Filter Description Required. ID of the User who is a member of this account team. Must be a valid User ID.

Usage

Use this object to manage the team members of a particular Account and to specify team member roles for those users on that account.

If team members are added by a user with group-based access, those members are removed after an account's owner is changed. This applies even if the **Keep account team** option is selected. A Salesforce admin, the account owner, or someone higher in the role hierarchy should add team members to keep team members related to the account.

If you use [SOQL statements to query all records in an organization](#), the ALL ROWS keywords don't query deleted account team member records.

SEE ALSO:

[Account](#)

AccountTerritoryAssignmentRule

An account assignment rule that assigns accounts to territories based on account fields. Available if Sales Territories has been enabled.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Users with the View Setup and Configuration permission can access this object. Users with the Manage Territories permission can edit this object.

Fields

Field	Details
BooleanFilter	Type string Properties Create, Filter, Nillable, Update Description Advanced filter conditions that were specified for the rule in the online application. For example, "(1 AND 2) OR 3."
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Update Description Indicates whether the rule is active (<code>true</code>) or inactive (<code>false</code>). Via the API, active rules run automatically when new accounts are created and existing accounts are edited. The exception is when the <code>IsExcludedFromRealign</code> field on an account is <code>true</code>, which prevents account assignment rules from evaluating that account.
IsInherited	Type boolean Properties Create, Defaulted on create, Filter, Update Description Indicates whether the rule is an inherited rule (<code>true</code>) or a local rule (<code>false</code>). An inherited rule also acts upon territories below it in the territory hierarchy. A local rule is created at the immediate territory and only impacts the immediate territory.
Name	Type string Properties Create, Filter, Update Description A name for the rule. Limit is 80 characters.

Field	Details
TerritoryId	Type reference Properties Create, Filter, Update Description ID of the territory where accounts that satisfy this rule are assigned.

Usage

A territory will not have any accounts (with the exception of manually assigned accounts) unless at least one account assignment rule is active for the territory.

SEE ALSO:

[AccountTerritoryAssignmentRuleItem](#)

[Territory](#)

[UserTerritory](#)

AccountTerritoryAssignmentRuleItem

A row of selection criteria for an AccountTerritoryAssignmentRule object. Available if Sales Territories has been enabled.

AccountTerritoryAssignmentRuleItem can be created or deleted if the `BooleanFilter` field on its corresponding AccountTerritoryAssignmentRule object is a null value.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Users with the View Setup and Configuration permission can access this object. Users with the Manage Territories permission can edit this object.

Fields

Field	Details
Field	Type picklist Properties Create, Filter, Group, Sort, Update

Field	Details
	Description The standard or custom account field to use as a criteria.
Operation	Type picklist Properties Create, Filter, Group, Sort, Update Description The criteria to apply, such as “equals” or “starts with.”
RuleID	Type reference Properties Create, Filter, Update Description ID of the associated AccountTerritoryAssignmentRule.
SortOrder	Type int Properties Create, Filter, Update Description The order in which this row is evaluated compared to other AccountTerritoryAssignmentRuleItem objects for the given AccountTerritoryAssignmentRule.
Value	Type string Properties Create, Filter, Nillable, Update Description The field value(s) to evaluate, such as 94105 if the Field is Billing Zip/Postal Code.

Usage

- Both standard and custom account fields can be used as criteria for account assignment rules.

- A territory will not have any accounts (with the exception of manually assigned accounts) unless at least one account assignment rule is active for the territory.

SEE ALSO:

- [AccountTerritoryAssignmentRule](#)
- [Territory](#)
- [UserTerritory](#)

AccountTerritorySharingRule

Represents the rules for sharing an Account within a territory.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
AccountAccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A value that represents the type of sharing being allowed. The possible values are: • Read • Edit • All
CaseAccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A value that represents the type of access granted to the target group for all child cases of the account. The possible values are: • None

Field	Details
	• Read • Edit
ContactAccessLevel	Type picklist Properties Filter, Group, Restricted picklist, Sort Description A value that represents the type of access granted to the target group for all related contacts on the account. The possible values are: • None • Read • Edit  Note: This field is read only.
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description A description of the sharing rule. Maximum size is 1000 characters. This field is available in API version 29.0 and later.
DeveloperName	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Corresponds to Rule Name in the user interface. This field is available in API version 24.0 and later.  Note: When creating large sets of data, always specify a unique DeveloperName for each record. If no DeveloperName is specified, performance may slow while Salesforce generates one for each record.
GroupId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort Description The ID representing the source group. Accounts owned by users in the source territory trigger the rule to give access.
Name	Type string Properties Create, Filter, Group, Sort, Update Description Label of the sharing rule as it appears in the user interface. Limited to 80 characters. Corresponds to Label on the user interface.
OpportunityAccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A value that represents the type of access granted to the target group for all opportunities associated with the account. The possible values are: • None • Read • Edit
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the user or group being given access, or, if a territory ID, the users assigned to that territory.

Usage

Use this object to manage the sharing rules for a particular object. General sharing and territory-related sharing use this object.

SEE ALSO:

[Account](#)

[AccountShare](#)

AccountUserTerritory2View

Represents the view of the Users in Assigned Territories related list in Lightning Experience for Sales Territories. Available in API version 42.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Standard and partner users can access this object.

Fields

Field Name	Details
AccountId	Type reference Properties Filter, Group, Nillable, Sort Description Unique identifier for the account associated with the Users in Assigned Territories related list.
RoleInTerritory2	Type picklist Properties Filter, Group, Nillable, Sort Description The role of each user in the Users in Assigned Territories related list.
Territory2Id	Type reference Properties Filter, Group, Nillable, Sort Description Unique identifier for each territory in the Users in Assigned Territories related list.
UserId	Type reference Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description Unique identifier for each user in the Users in Assigned Territories related list.

Usage

Use this object to show the users who are assigned to the territories assigned to an account.

A filter criterion with one `AccountId` is required when you execute a SOQL query on this object.

ActionCadence

Represents the definition of a cadence. This object is available in API version 45.0 and later.

Use ActionCadence and its related objects to learn about an action cadence, including:

- The current state of the action cadence.
- The steps that the action cadence contains.
- Which leads, contacts, or person accounts are assigned to the action cadence.

The ActionCadence, ActionCadenceStep, ActionCadenceRule, and ActionCadenceRuleCondition objects define an action cadence and the steps that it contains. ActionCadenceTracker and ActionCadenceStepTracker track a prospect's movement through an active action cadence.

By learning when the action cadence objects are created and deleted, you can make the most of the action cadence API.

- An ActionCadence record is created when you use the Sales Engagement app to create a cadence.
- An ActionCadenceStep record is created to represent a step. If the step is a branch step, then corresponding ActionCadenceRule and ActionCadenceRuleCondition records are also created.
- An ActionCadenceTracker record is created when you assign a prospect to an action cadence.
- An ActionCadenceStepTracker record is created each time the prospect moves to a new step.

All of these action cadence records exist until you use the Sales Engagement app to delete an action cadence. If many prospects have been assigned to the action cadence, there can be many associated ActionCadenceTracker and ActionCadenceStepTracker records. In this case, deleting the action cadence can take some time. While the action cadence is being deleted, the value for the State field is `Deleting` on the ActionCadence record.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`,

Fields

Field	Details
ActivatedDate	Type date

Field	Details
	Properties Filter, Group, Nillable, Sort Description The date that the user activated the action cadence. ActionCadence objects are created in a draft state and must be manually activated before they're used.
ActiveTargets	Type int Properties Filter, Group, Nillable, Sort Description The total number of active targets that are currently assigned with this cadence. Available in API version 58.0 and later.
Description	Type textarea Properties Create, Nillable, Update Description The description of this action cadence.
ErrorMessage	Type string Properties Filter, Group, Nillable, Sort Description If there was an error when activating the action cadence, this field contains the error message.
FolderId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the folder that contains the action cadence. Available in API version 49.0 and later. This is a polymorphic relationship field. Relationship Name Folder Relationship Type Lookup Refers To Folder, Organization, User

Field	Details
FolderName	Type string Properties Filter, Nillable, Sort Description The name of the folder that contains the action cadence. Available in API version 49.0 and later.
IsWaitAllowedBeforeDaisyChain	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Whether the cadence is allowed to have a wait step before a daisy chain step (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
LastEditedDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time this object was last edited.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date this object was last referenced.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date this action cadence was last viewed in the Sales Engagement app.
Name	Type string

Field	Details
	Properties Create, Filter, Group, idLookup, Sort, Update Description The name of this action cadence. Every action cadence in an org must have a unique name.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of the action cadence (typically the user who created it).  Note: To change the owner of an action cadence, the new owner must have read access to action cadences enabled in their user profile. This field is a relationship field. Relationship Name Owner Relationship Type Lookup Refers To User
State	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description This entity's state. Possible values are: • Active The user finished modifying the action cadence and has activated it. At this point, you can't make any more changes to the steps in the action cadence. • Deleting All records associated with this action cadence, including the ActionCadence record and all its related records, are being deleted. While in this state, the ActionCadence can't be attached to a prospect. • Draft ActionCadence objects are in the draft state when they're created. In this state, the ActionCadence can't be assigned to any prospect. • Error

Field	Details
	An error occurred while trying to activate the action cadence. • Inactive The user deactivated the action cadence. New targets can't be added to the action cadence. Existing targets continue in the action cadence until completion.
SuccessfulCompletions	Type int Properties Filter, Group, Nillable, Sort Description The total number of successful dispositions this cadence has upon completion. For example, customer engaged or customer connected. Available in API version 58.0 and later.
TotalSteps	Type int Properties Filter, Group, Nillable, Sort Description The number of total steps associated with this cadence. This value doesn't include special step types such as root, branch, and daisy chain. Available in API version 58.0 and later.
TotalTargets	Type int Properties Filter, Group, Nillable, Sort Description The total number of targets that have been assigned with this cadence. Available in API version 58.0 and later.
Type	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates the type of ActionCadence. Available in API version 56.0 and later. Possible values are: • Standard Standard cadences can contain multiple steps and are usually built by sales managers in the Cadence Builder. • Quick

Field	Details
	Quick cadences can contain only one step, are built by reps for their personal use, and don't require the Cadence Builder.

Usage

Use ActionCadence to learn how many action cadences are currently active:

```
select COUNT() from ActionCadence where State="Active"
```

Retrieve all ActionCadence records that have "West Coast" in their name:

```
SELECT ActionCadenceId FROM ActionCadence WHERE NAME LIKE '[West Coast Cadence]%'
```

Retrieve all ActionCadence records owned by a specific user:

```
SELECT ActionCadenceId FROM ActionCadence WHERE OwnerId = '<owner id>'
```

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ActionCadenceChangeEvent (API version 48.0)

Change events are available for the object.

ActionCadenceOwnerSharingRule on page 65

Sharing rules are available for the object.

ActionCadenceShare on page 67

Sharing is available for the object.

SEE ALSO:

[ActionCadenceRule](#)

[ActionCadenceRuleCondition](#)

[ActionCadenceStep](#)

[ActionCadenceStepTracker](#)

ActionCadenceRule

Represents the logic that a branch step uses to determine which branch an action cadence tracker follows in an action cadence. Use ActionCadenceRule to learn about a branch step, including its logic and what the next step is. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
ActionCadenceStepId	Type reference Properties Create, Filter, Group, Sort Description The ActionCadenceStep that this rule is associated with. This field is a relationship field. Relationship Name ActionCadenceStep Relationship Type Lookup Refers To ActionCadenceStep
ConditionLogic	Type string Properties Create, Filter, Group, Sort, Update Description The logical operator used to evaluate the rule conditions. Possible values are: • AND If this rule has several conditions, all of them must be <code>true</code> for this step to be <code>true</code>.
GlobalEventType	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description If the action cadence rule contains a global exit condition, this field contains the type of event that the rule represents. Possible values are: • EmailReply • EmailHardBounce • EmailSoftBounce • CallMeaningfulConnect • CallNotInterested • CallUnqualified

Field	Details
	• <code>CallLeftVoicemail</code> • <code>CallCallbackLater</code> This field is available in API version 49.0 and later.
<code>GraphState</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Represents the state of the <code>ActionCadenceRule</code> within the step graph, or sequence, of the related action cadence. Available in API version 53.0 and later. Possible values are: • <code>Included</code>—This step rule is part of the step graph. • <code>Orphaned</code>—This step rule was removed from the step graph before the action cadence was activated. Orphaned step rules are deleted upon activation. • <code>Pending</code>—This step rule has been created but hasn't been added to the step graph. Pending step rules can be added to the step graph in the future. • <code>Retired</code>—This step rule was previously part of an active action cadence step graph and was removed during an edit after activation. Retired step rules can have associated step trackers.
<code>OutcomeNextStepName</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The next step in the action cadence if this rule evaluates as <code>true</code>. If this rule evaluates as <code>false</code>, the next step is <code>ActionCadenceStep.BranchDefaultStepName</code>.
<code>ParentRuleName</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The value of the <code>RuleName</code> field of the previous rule in the action cadence. Must contain a valid rule name value unless this rule is the root rule. <code>null</code> if this rule is a root rule. This field is available in API version 49.0 and later.
<code>RuleName</code>	Type string

Field	Details
	Properties Create, Filter, Group, Sort, Update Description The name given to the rule. Every rule in an action cadence must have a unique name.
RuleType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of step that this rule applies to. Possible values are: • BranchStep— The rule evaluates the condition of a branch step. A branch step is an ActionCadenceStep record with the field <code>type</code> equal to <code>Branch</code>. • RepeatedStep— The rule evaluates the repeat steps for quick cadence. Available in API version 58.0 and later. • RootStep— The rule evaluates a global exit condition. • SubRootStep— Available in API version 58.0 and later. This field is available in API version 49.0 and later.

Usage

Use ActionCadenceRule to see all the rules associated with a branch step:

```
select RuleName from ActionCadenceRule where ActionCadenceStep.ActionCadence.Name = "High Priority CFO"
```

SEE ALSO:

[ActionCadence](#)

[ActionCadenceRuleCondition](#)

[ActionCadenceStep](#)

[ActionCadenceStepTracker](#)

ActionCadenceRuleCondition

Represents the logic for a branch step. This object is available in API version 48.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
ActionCadenceRuleId	Type reference Properties Create, Filter, Group, Sort Description The ID of the ActionCadenceRule that this condition is associated with.
Operator	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The conditional operator for this rule. Possible values are: Equal
Resource	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The field to evaluate. Possible values are: - CallDispositionCategory Use by branch steps. - EmailEngagement Used by ListenerBranch steps.
RuleConditionName	Type string Properties Create, Filter, Group, Sort, Update Description The name of the rule condition. Every rule condition in a cadence must have a unique name.
Value	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The event that your cadence rule condition listens for to decide when the event is complete. Possible values for emails are: - EmailOpen - EmailLinkClick Possible values for calls are: - CallMeaningfulConnect - CallUnqualified - CallLeftVoicemail - CallNotInterested - CallCallBackLater

Usage

Use ActionCadenceRuleContion to see all the rule conditions associated with a branch step:

```
select RuleConditionName from ActionCadenceRuleCondition where ActionCadenceStepId= <ID of a branch step>
```

SEE ALSO:

[ActionCadence](#)
[ActionCadenceRule](#)
[ActionCadenceStep](#)
[ActionCadenceStepTracker](#)

ActionCadenceStep

Represents a step in a cadence. Use ActionCadenceStep to learn which steps belong to a cadence, and how the steps are connected to each other. This object is available in API version 48.0 and later.

An ActionCadenceStep record is created to represent a step. If the step is a branch step, then corresponding ActionCadenceRule and ActionCadenceRuleCondition records are also created.



Note: An ActionCadenceStep with IsOrphan equal to true can be part of a cadence but is never executed. To retrieve the steps that can be executed by the cadence, query for ActionCadenceStep records with IsOrphan equal to false. ActionCadenceStep records with IsOrphan equal to true are deleted.

Supported Calls

create(), delete(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(), update(), upsert()

Fields

Field	Details
ActionCadenceId	Type reference Properties Create, Filter, Group, Sort Description The ID of the ActionCadence that this step belongs to. This field is a relationship field. Relationship Name ActionCadence Relationship Type Lookup Refers To ActionCadence
AllCallsCallBackLater	Type int Properties Filter, Group, Nillable, Sort Description The number of calls having the call outcome Call Back Later.
AllCallsLeftVoicemail	Type int Properties Filter, Group, Nillable, Sort Description The number of calls having the call outcome Left Voicemail.
AllCallsMeaningfulConnect	Type int Properties Filter, Group, Nillable, Sort Description The number of calls having the call outcome Meaningful Connect.
AllCallsNotInterested	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of calls having the call outcome Not Interested .
AllCallsUncategorized	Type int Properties Filter, Group, Nillable, Sort Description The number of calls where the call outcome isn't categorized.
AllCallsUnqualified	Type int Properties Filter, Group, Nillable, Sort Description The number of calls having the call outcome Unqualified .
AllEmailsBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails that weren't delivered successfully. This field is a calculated field.
AllEmailsDeliveredCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails delivered. This field is a calculated field.
AllEmailsHardBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails returned for a permanent reason — for example, the email address doesn't exist. This field is available in API version 50.0 and later.

Field	Details
AllEmailsLinkClickedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of links inside an email that the target clicked during this step. Multiple clicks on the same link count towards this total. This field is available in API version 50.0 and later.
AllEmailsOpenedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails that the target opened while working on this step. Multiple opens of the same email count towards this total.
AllEmailsOutOfOfficeCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails that were returned because the recipient set an out-of-office responder. Multiple replies count towards this total. This field is available in API version 50.0 and later.
AllEmailsRepliedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails that targets replied to as part of this step. Multiple replies to the same email count towards this total, This field is available in API version 50.0 and later.
AllEmailsSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of sent emails.
AllEmailsSoftBouncedCount	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The number of emails that were returned for temporary reasons — for example, the email is too large. This field is available in API version 50.0 and later.
AllEmailsTrackedSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent by this user with engagement tracking enabled.
AllEmailsUntrackedSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent by this user without engagement tracking.
AllManuallyCompletedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of steps manually completed.
AllOnTimeCompletedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of steps completed on time.
AllOverdueCompletedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of overdue steps that were completed.

Field	Details
AllSkippedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of steps skipped.
AllTotalCallsCount	Type int Properties Filter, Group, Nillable, Sort Description The number of calls that the sales rep made during this step. This field is a calculated field.
BranchDefaultStepName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the default step.
ChainedCadenceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the ActionCadence for the linked action cadence. Available only if the step type is <code>DaisyChain</code> (meaning that another action cadence is connected to this action cadence). This field is a relationship field. Relationship Name ChainedCadence Relationship Type Lookup Refers To ActionCadence
GoToStepIntervalInMinutes	Type int Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description Contains information about when the step should be repeated next, in minutes. Available in API version 58.0 and later.
GoToStepIterationLimit	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Contains the maximum number of repeat (goto) step iterations allowed. Available in API version 58.0 and later.
GoToStepName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description If this step's original next step was removed during an edit after activation, this field specifies the updated next step.
GraphState	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Represents the state of the <code>ActionCadenceStep</code> within the step graph, or sequence, of the action cadence. Possible values are: • Included—This step is part of the step graph. • Orphaned—This step was removed from the step graph before the action cadence was activated. Orphaned steps are deleted upon activation. • Pending—This step has been created but hasn't been added to the step graph. Pending steps can be added to the step graph in the future. • Retired—This step was previously part of an active action cadence step graph and was removed during an edit after activation. Retired steps can have associated step trackers.
HasVariant	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description This field is valid for email and call step types. If <code>true</code>, the step has email or call template variants. The template variants are defined in ActionCadenceStepVariant records. Available in API version 53.0 and later. The default value is <code>false</code>.
IsImmediateWakeUp	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether a listener branch is immediate wake up (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
IsOrphan	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, this step isn't executed by the action cadence and will be deleted. Steps with <code>IsOrphan</code> equal to <code>true</code> have <code>ParentStepName</code> equal to <code>null</code>.  Note: To retrieve the active steps in an action cadence, include <code>IsOrphan=false</code> in your query. The default value is <code>false</code>. This field is available in API version 49.0 and later. This field is a calculated field.
IsScheduledDueDateLocked	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether assignees can change the due date (<code>true</code>) or not (<code>false</code>). Available in API version 58.0 and later. The default value is <code>false</code>.
IsScreenFlowActive	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Indicates whether the flow is active and can be executed (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
IsStepAutomationActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If true, the flow referenced in the StepAutomationReference field is active. If false, the flow isn't active. Only active flows can be executed. The default value is <code>false</code>. This field is available in API version 56.0 and later.
IsThreaded	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description This field is valid for email steps. Email steps have ActionCadence.StepType equal to <code>SendAnEmail</code>. If <code>true</code>, the email for this email step is sent as a reply to the email conversation from the previous email step. By sending the email as a reply to a previous email, customers see a "conversation" view of the emails. Only emails from the same action cadence are grouped as conversations. This field can't be true for the first email step in an action cadence, because the first email from an action cadence must start a new conversation with the prospect. The default value is <code>false</code>. This field is available in API version 49.0 and later.
ParentStepName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The step name (<code>ActionCadenceStep.StepName</code>) of the previous step in the action cadence. Must contain a valid step name value unless this step is the root step. <code>null</code> if this step is a parent step.
RootStepId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The ID of the root step for this action cadence. Every action cadence has exactly one root step (so that the Salesforce API can find all the steps for this cadence). This field is a relationship field. Relationship Name RootStep Relationship Type Lookup Refers To ActionCadenceStep
ScheduledDaysUntilDue	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of days after which this current step is due. Available in API version 58.0 and later.
ScheduledDaysUntilStart	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of days when this step starts after the previous step completes. For delays of greater than one day from <code>ScheduledStartTimeInMinutes</code>. Available in API version 58.0 and later.
ScheduledStartDelayInMinutes	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Any hard waits in minutes is captured in this field. Waits greater than 1 day need to set <code>ScheduledDaysUntilStart</code>. Available in API version 58.0 and later.
ScheduledStartTimeInMinutes	Type int Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The specific time of day when the step starts. The time represents minutes after 00:00. Available in API version 58.0 and later.
ScreenFlowReference	Type string Properties Create, Filter, Group, Nillable, Sort Description The namespace__fullName of the screen flow. Used to describe flow objects and launch flows client side.
StepAutomationReference	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the flow that the step uses. Cadence steps can launch a cadence step flow as the step or as a cadence autolaunched flow when a rep completes the step. The format is namespace__fullName. This field is available in API version 56.0 and later.
StepComments	Type textarea Properties Create, Nillable, Update Description A comment that provides additional information about this step.
StepName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Unique identifier for this step. Generated by Salesforce.
StepTitle	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The title given to the step when it was created.

Field	Details
TemplateId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description If a template was added to this step, this field contains the template's ID. For example, if this step is a call step it can contain a template for a call script. Or, if this step is an email step, it can contain a template for an email. This field is a polymorphic relationship field. Relationship Name Template Relationship Type Lookup Refers To CallTemplate, EmailTemplate
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of step. Possible values are: • <code>AutoSendAnEmail</code> — Salesforce automatically sends the specified email. • <code>Branch</code> — A branch step in the action cadence. • <code>CreateTask</code> — Used for custom steps. • <code>DaisyChain</code> — A daisy chain step. A daisy chain step connects this action cadence to another action cadence. It must be the last step in the path. • <code>LinkedInConnection</code> • <code>LinkedInMail</code> • <code>ListenerBranch</code> — A branch step for emails. • <code>MakeACall</code> — The sales rep must call the prospect at this step. • <code>PlatformScreenFlow</code> • <code>Root</code> — This step is the root step for the action cadence. • <code>SendAnEmail</code> — The sales rep must send the prospect an email at this step. • <code>Wait</code> — A wait step tells the sales rep not to do anything at this point in the action cadence.
TypeDetail	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description More detail about the step type. If the step is a cadence step flow, this field contains the flow name. Otherwise, this field contains the same value as the Type field. This field is available in API version 56.0 and later.
UniqueEmailsLinkClickedCount	Type reference Properties Filter, Group, Nillable, Sort Description The number of links inside an email that the target clicked during this step. Multiple clicks on the same link aren't counted. This field is available in API version 50.0 and later.
UniqueEmailsOpenedCount	Type reference Properties Filter, Group, Nillable, Sort Description The number of emails that the target opened as part of this step. Multiple openings of the same email aren't counted. This field is available in API version 50.0 and later.
UniqueEmailsRepliedCount	Type reference Properties Filter, Group, Nillable, Sort Description The number of emails that targets replied to as part of this step. Multiple replies to the same email aren't counted. This field is available in API version 50.0 and later.
WaitTimeInSeconds	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Required if the step type is <code>wait</code>. The time in seconds for this step to wait.

Usage

Use ActionCadenceStep to see what steps your action cadence has:

```
select StepTitle from ActionCadenceStep where ActionCadence.ID= <the id of an action cadence> and IsOrphan=false
```

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ActionCadenceStepChangeEvent (API version 48.0)

Change events are available for the object.

SEE ALSO:

- [ActionCadence](#)
- [ActionCadenceRule](#)
- [ActionCadenceRuleCondition](#)
- [ActionCadenceStepTracker](#)

ActionCadenceStepTracker

Represents a step in an active cadence for a specific cadence target. This object is available in API version 48.0 and later.

An ActionCadenceStepTracker record is created when a target moves to a new step in a cadence. Use ActionCadenceStepTracker to find information such as the step's current state, the reason it completed, and its type.

Supported Calls

describeSObjects(), getDeleted(), getUpdated(), query(), retrieve()

Fields

Field	Details
ActionCadenceId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description The ID of the ActionCadence that is related to the ActionCadenceStep.
	This field is a relationship field.
	Relationship Name ActionCadence

Field	Details
	Relationship Type Lookup Refers To ActionCadence
ActionCadenceName	Type string Properties Filter, Group, Nillable, Sort Description The name of the related ActionCadence object.
ActionCadenceStepId	Type reference Properties Filter, Group, Nillable, Sort Description ActionCadenceStepTracker is the runtime version of an ActionCadenceStep. This field contains the ID of the related ActionCadenceStep. This field is a relationship field. Relationship Name ActionCadenceStep Relationship Type Lookup Refers To ActionCadenceStep
ActionCadenceTrackerId	Type reference Properties Filter, Group, Sort Description The ID of the related ActionCadenceTracker. This field is a relationship field. Relationship Name ActionCadenceTracker Relationship Type Lookup Refers To ActionCadenceTracker

Field	Details
ActionTakenDateTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the action described in this step was taken.
CompletedById	Type reference Properties Filter, Group, Nillable, Sort Description The user ID of the sales rep who completed this step. A step can be assigned to several users before it's completed. This field is available in API version 50.0 and later. This field is a relationship field. Relationship Name CompletedBy Relationship Type Lookup Refers To User
CompletionDate	Type dateTime Properties Filter, Nillable, Sort Description The date this step completed. A step is completed either when the action is taken, or the step is skipped.
CompletionReason	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The reason that this step completed: Possible values are: • <code>AutomaticallyCompleted</code> — The sales rep successfully completed this step and moved to the next one. Salesforce automatically marks this step as completed. • <code>AutomaticallyExited</code> — The step exited because a global exit condition occurred. This value is available in API version 49.0 and later. • <code>ManuallyCompleted</code> — The sales rep manually marked this step as completed.

Field	Details
	ManuallySkipped — The sales rep skipped this step.
DueDateTime	Type dateTime Properties Filter, Nillable, Sort Description Some steps have a due date to indicate when they must be completed. If this step has been assigned a due date, this field contains the date and time it is due.
ErrorCode	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Possible values are: - AUTO_EMAIL_DAILY_LIMIT_REACHED - AUTO_EMAIL_ORG_SETTING_OFF - AUTO_LIST_MQ_MAX_RETRIES_FAILED - BCC_NOT_ALLOWED_IF_BCC_COMPLIANCE_ENABLED - EAC_GLOBAL_DATA_SOURCE_ERROR—EAC data source error - EMAIL_ORG_SETTING_OFF - EXCHANGE_MAX_MAILBOX_SIZE—Max Exchange mailbox size reached - EXCHANGE_SEND_AS_DENIED - FIX_WITH_RECONNECT—Data connection failed - GOOGLE_MAIL_SERVICE_NOT_ENABLED—Gmail service not enabled - INVALID_DRAFT—Invalid email draft - INVALID_TARGET_EMAIL - INVALID_TEMPLATE_ID - INVALID_USER_EMAIL - MAIL_PROVIDER_RATE_LIMIT_REACHED—Email provider rate limit reached - NON_EMAIL_UNKNOWN_ERROR—Unknown error - NO_ATTACHMENT_ACCESS - NO_CONTENT_VERSION_ACCESS - NO_LIST_EMAIL_PERMISSION - NO_TARGET_ACCESS - ORG_WIDE_AUTO_EMAIL_LIMIT_REACHED - ORG_WIDE_DAILY_EMAIL_LIMIT_REACHED - OTHER_REQ_FIELD_MISSING—Other required field missing

Field	Details
	• PARDOT_MERGE_FIELD_RENDERING_ERROR • POST_SEND_EXCEPTION • RETRIES_MAX_EXCEEDED—Maximum retries exceeded • RETRY_LATER • SCHEDULED_EMAIL_FAILED—Unknown error • SENDER_MAILBOX_NOT_FOUND • TARGET_DO_NOT_CONTACT_ON—Target has Do Not Contact on • TARGET_EMAIL_BOUNCED • TARGET_EMAIL_EMPTY • TEMPLATE_DELETED • TEMPLATE_EMPTY—Email subject or body missing • TEMPLATE_HAS_INVALID_MERGE_FIELD • TEMPLATE_MERGE_FIELD_RENDERING_ERROR • TEMPLATE_NOT_PUBLIC—No access to template • TEMPLATE_TOO_LARGE • UNKNOWN—Email unknown error • USER_HAS_LOST_HVS_ACCESS • USER_IS_INACTIVE
GoToStepIterationCount	Type int Properties Filter, Group, Nillable, Sort Description The number of times the action cadence step tracker was created for the same step in a cadence. Available in API version 58.0 and later.
IsActionTaken	Type boolean Properties Defaulted on create, Filter, Group, Sort Description true if the sales rep completed an action during this step, such as making a phone call, otherwise false. The default value is false. This field is a calculated field.
ScheduledStartDateTime	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The date and time when the step starts. Available in API version 58.0 and later.
SecondsOverdue	Type int Properties Filter, Group, Nillable, Sort Description If this step has a due date that has passed, this field contains the number of seconds that has elapsed since the due date. Once a sales rep takes action on the cadence step, the value of this field is the number of seconds elapsed between the due date and the time the action was taken. This field is a calculated field.
State	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The current state of this step. Possible values are: Possible values are: • Active — The current step that the sales rep is performing. There can only be one active step for a given target. • Cancelled — The sales rep canceled the step. Salesforce doesn't run any canceled steps. • Completed — This step is finished. Either the work in the step completed, or the step was skipped. • Error — An error occurred while executing this step. • InProgress — The sales rep has started the step, but it isn't yet completed. • Paused — The sales rep paused the step. • Queued — Used for automated email steps. The email step has started but the email is waiting in the queue to be sent. • Scheduled — Used for email steps. An email can be scheduled to be sent later.
StepTitle	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The name of the related step.
StepType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of step to execute. Possible values are: • AutoSendAnEmail • Branch • CreateTask • DaisyChain • LinkedInConnection • LinkedInMail • ListenerBranch • MakeACall • PlatformScreenFlow • Root • SendAnEmail • SubRoot • Wait
TargetId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the prospect that is assigned to this cadence. This field is a polymorphic relationship field. Relationship Name Target Relationship Type Lookup Refers To Contact, Lead
WasEverPaused	Type boolean

Field	Details
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates whether the sales rep had ever paused this step (<code>true</code>), or not (<code>false</code>). This field is available in API version 50.0 and later.

Usage

List all the steps that this prospect has completed in a given cadence:

```
select StepTitle from ActionCadenceStepTracker where TargetID = <target ID>
and ActionCadenceId=<action cadence id> and StepType="Completed"
```

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ActionCadenceStepTrackerChangeEvent (API version 48.0)

Change events are available for the object.

SEE ALSO:

[ActionCadence](#)

[ActionCadenceRule](#)

[ActionCadenceStep](#)

[ActionCadenceRuleCondition](#)

ActionCadenceStepVariant

Represents an email template or call script variant associated with an action cadence step. Email and call steps can have up to 3 variants associated so sales teams can compare the engagement results. This object is available in API version 53.0 and later.

Supported Calls

```
create(), delete(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(),
update(), upsert()
```

Special Access Rules

Sales Engagement and Allow Email Template and Call Script Variant Testing must be enabled.

Fields

Field	Details
ActionCadenceStepId	Type reference Properties Create, Filter, Group, Sort Description The ID of the related action cadence step. This is a relationship field. Relationship Name ActionCadenceStep Relationship Type Lookup Refers To ActionCadenceStep
SplitPercentage	Type percent Properties Create, Filter, Nillable, Sort, Update Description The percentage of emails to send or calls to make using this email template or call script variant. The total for all variants must be 100%.
TemplateId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the associated email template or call script. This is a polymorphic relationship field. Relationship Name Template Relationship Type Lookup Refers To CallTemplate, EmailTemplate
Type	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The type of the associated action cadence step. Possible values are: • AutoSendAnEmail • Branch • CreateTask • DaisyChain • LinkedInConnection • LinkedInMail • ListenerBranch • MakeACall • PlatformScreenFlow—Available in version 55.0 and later. • Root • SendAnEmail • Wait Only email and call steps can have an associated action cadence step variant.

Usage

Use ActionCadenceStepVariant to retrieve the email template or call script for an action cadence step:

```
SELECT SplitPercentage, TemplateId FROM ActionCadenceStepVariant WHERE
ActionCadenceStepId=:idValue]
```

Use ActionCadenceStepVariant to retrieve the call scripts from all call steps:

```
SELECT SplitPercentage, TemplateId, ActionCadenceStepId FROM ActionCadenceStepVariant WHERE
Type='MakeACall'
```

ActionCadenceTracker

Represents an active cadence target. This object is available in API version 45.0 and later.

An ActionCadenceTracker record is created when you add a target to a cadence. Use ActionCadenceTracker to learn about a running cadence target, including its state, current step, assigned prospect, and reason for completion.

Supported Calls

`delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
ActionCadenceId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the related ActionCadence. Relationship Name ActionCadence Relationship Type Lookup Refers To ActionCadence
CompletionDisposition	Type picklist Properties Filter, Group, Nillable, Sort Description The target's disposition when it exited the action cadence. This field contains a value if the target's <code>State</code> is <code>Complete</code>. Sales reps can set this value when removing a target from a cadence. This field is available in API version 51.0 and later. Possible values are: • <code>Bad Data</code> — some of the target's data is incorrect or invalid. • <code>Contact Later</code> — the target asked to be contacted at a later date. • <code>Customer Connected</code> — the sales rep contacted the target. • <code>Customer Engaged</code> — the target engaged with an email. • <code>Disqualified</code> — a sales rep determined that the target isn't qualified. • <code>Duplicate</code> — the target has a duplicate lead, contact, or person account record. • <code>No Response</code> — the target didn't reply to any outreach. • <code>Not Interested</code> — the target stated a lack of interest. • <code>Success</code> — the cadence outreach was successful.
CompletionReason	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The reason that the target completed the cadence. This field contains a value if the target's <code>State</code> is <code>Complete</code>. Possible values are:

Field	Details
	• <code>AutomaticallyExited</code> — the target completed because a global exit condition occurred. This value is available in API version 49.0 and later. • <code>AutomaticallyExitedDeletedStep</code> • <code>AutomaticallyExitedInvalidParentStep</code> • <code>DaisyChained</code> — the target completed because it's connected to another action cadence. • <code>LeadConverted</code> — the target completed because the lead converted. • <code>ManuallyRemoved</code> — the target completed because the sales rep removed it from the cadence. • <code>ManuallyRemovedNoAccess</code>— reserved for future use. • <code>NoMoreSteps</code> — the target completed the action cadence because all the action cadence steps were completed.
<code>CurrentStepId</code>	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the current <code>ActionCadenceStepTracker</code>. Relationship Name CurrentStep Relationship Type Lookup Refers To <code>ActionCadenceStepTracker</code>
<code>DaisyChainIteration</code>	Type int Properties Filter, Group, Nillable, Sort Description The number of this action cadence in a sequence of linked action cadences followed by this target. This value starts at 1 with the initial action cadence. A target can follow a sequence of up to 10 linked action cadences. Available in API version 53.0 and later.
<code>ErrorMessage</code>	Type string Properties Filter, Group, Nillable, Sort Description If an error occurs while this target is being completed, this field contains the error message.

Field	Details
ExitGlobalRuleId	Type reference Properties Filter, Group, Nillable, Sort Description If a global exit condition occurs, a target completes. One example of a global exit condition is an email returned because of an invalid address. If the target completed because a global exit condition occurred, this field contains the ID of the ActionCadenceRule record that evaluated as <code>true</code>. This field is available in API version 49.0 and later. Relationship Name ExitGlobalRule Relationship Type Lookup Refers To ActionCadenceRule
IsTrackerActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the action cadence target is active (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>. An action cadence target is active if the state is <code>Running</code>, <code>Paused</code>, <code>Processing</code>, or <code>Initializing</code>. Only active targets count against the org limit of 150,000 trackers. This field is available in API version 50.0 and later.
LastCompletedStepId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the last completed ActionCadenceStepTracker. Relationship Name LastCompletedStep Relationship Type Lookup Refers To ActionCadenceStepTracker

Field	Details
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the user who is assigned to complete the cadence steps for the target. Relationship Name Owner Relationship Type Lookup Refers To Group, User
RelatedToAttributionType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Defines when the cadence is related to an opportunity or invoice. Available in API version 51.0 and later. Possible values are: • Activation—Attribute the opportunity to the cadence when the opportunity is created. • Collected—Attribute the value to the cadence after payment for the invoice is collected. • Collection Advancement—Attribute the value to the cadence when the invoice is out for collection. • Maturation—Attribute the opportunity to the cadence only when the opportunity stage advances.
RelatedToId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the related opportunity if there's one. Available in API version 51.0 and later. This is a polymorphic relationship field. Relationship Name RelatedTo Relationship Type Lookup

Field	Details
	Refers To Opportunity, Invoice
ScheduledResumeDateTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the action cadence tracker is going to resume after it's paused or on a wait step. Available in API version 53.0 and later.
State	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The state of the current action cadence tracker. Possible values are: • Complete • Error • Initializing • Paused • Processing—Salesforce is working on changing the state of this action cadence tracker. We recommend that you filter out steps that have this state from your dashboards. • Running
TargetId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the target that is assigned to this action cadence. Relationship Name Target Relationship Type Lookup Refers To Contact, Lead

Usage

Use ActionCadenceTracker to see what targets are currently assigned to an active action cadence.

```
select TargetId from ActionCadenceTracker where ActionCadenceId=<Id of the action cadence>
and State= "Running"
```

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ActionCadenceTrackerChangeEvent (API version 48.0)

Change events are available for the object.

ActionCadenceTrackerOwnerSharingRule on page 65

Sharing rules are available for the object.

ActionCadenceTrackerShare on page 67

Sharing is available for the object.

ActionCdncStpMonthlyMetric

Represents the monthly engagement metrics for an action cadence step. This object is available in API version 49.0 and later.

Supported Calls

describeSObjects(), getDeleted(), getUpdated(), query(), retrieve()

Special Access Rules

Sales Engagement must be enabled.

Fields

Field	Details
ActionCadenceStepId	Type reference Properties Filter, Group, Sort Description The ID of the related action cadence step. This is a relationship field. Relationship Name ActionCadenceStep

Field	Details
	Relationship Type This is an overview-detail relationship field, where ActionCadenceStep is the master object. Refers To ActionCadenceStep
AllCallsCallBackLater	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this step with the call result Call Back Later.
AllCallsLeftVoicemail	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this step with the call result Left Voicemail.
AllCallsMeaningfulConnect	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this step with the call result Meaningful Connect.
AllCallsNotInterested	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this step with the call result Not Interested.
AllCallsUncategorized	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this step with no call result specified.
AllCallsUnqualified	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this step with the call result Unqualified.
AllEmailsBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The total of hard and soft bounced emails for this step in the month. This is a calculated field.
AllEmailsDeliveredCount	Type int Properties Filter, Group, Nillable, Sort Description The number of successfully delivered emails for this step in the month. This is a calculated field.
AllEmailsHardBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of hard bounced emails for this step in the month.
AllEmailsLinkClickedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails containing a link clicked by the recipient for this step in the month.
AllEmailsNotDeliveredCount	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of sent emails that were bounced for all recipients on the email. Bounced emails aren't marked as delivered. Available in API version 54.0 and later.
AllEmailsOpenedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails opened by the recipient for this step in the month.
AllEmailsOutOfOfficeCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails that triggered an out-of-office reply for this step in the month.
AllEmailsRepliedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails replied to for this step in the month.
AllEmailsSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent for this step in the month. This is a calculated field.
AllEmailsSoftBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails soft bounced for this step in the month.
AllEmailsTrackedSentCount	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The number of emails sent with engagement tracking enabled for this step in the month. Available in API version 51.0 and later.
AllEmailsUntrackedSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent without engagement tracking for this step in the month. Available in API version 51.0 and later.
AllTotalCallsCount	Type int Properties Filter, Group, Nillable, Sort Description The total number of calls with all call results for this step in the month. This is a calculated field.
DeliveredRecipientCount	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients that were successfully delivered an email. Available in API version 54.0 and later. This field is a calculated field.
DeliveredRecipientRate	Type percent Properties Filter, Nillable, Sort Description The percentage of unique recipients that received an email you sent. Available in API version 54.0 and later. This field is a calculated field.

Field	Details
HardBounceTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent with hard bounce tracking. Available in API version 54.0 and later.
HasTemplateAssigned	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this step has an associated email template or call script. Available in API version 52.0 and later. The default value is 'false'.
HrdBncTrackableRecipientSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who received an email with hard bounce tracking. Available in API version 54.0 and later.
IsCompoundMetric	Type boolean Properties Defaulted on create, Filter, Group, Sort Description When true, indicates that this metric represents engagement for a combination of the action cadence step and a single email template. The value is true for all action cadence steps created in Summer '21 and later. When false, indicates that the metric represents engagement for the action cadence step and all email templates used on the step. The value is false for all action cadence steps created in Spring '21 and earlier. The default value is 'false'. Available in API version 52.0 and later.
LinkClickTrackableSends	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of emails sent with link click tracking. Available in API version 54.0 and later.
LinkClkTrackableRecipientSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who received an email with link tracking. Available in API version 54.0 and later.
Month	Type date Properties Filter, Group, Sort Description The month in which the engagement occurred.
MonthInt	Type int Properties Filter, Group, idLookup, Sort Description The month in which the engagement occurred, in <code>yyyymm</code> format.
OooTrackableRecipientSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who received an email with out-of-office tracking. Out-of-office tracking requires Inbox. Available in API version 54.0 and later.
OpenTrackableRecipientSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who received an email with open tracking. Available in API version 54.0 and later.

Field	Details
OpenTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent with open tracking. Available in API version 54.0 and later.
OutOfOfficeTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent with out-of-office tracking. Available in API version 54.0 and later.
RecipientReplies	Type int Properties Filter, Group, Nillable, Sort Description The number of unique recipients who replied to an email. Available in API version 54.0 and later.
RecipientSends	Type int Properties Filter, Group, Nillable, Sort Description The number of unique email recipients. Available in API version 54.0 and later.
RecipientsHardBounced	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients that hard-bounced an email. Hard bounces can mean that the recipient's email address doesn't exist or is misspelled. Available in API version 54.0 and later.
RecipientsOutOfOffice	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of recipients that responded with an out-of-office reply. Available in API version 54.0 and later.
RecipientsSoftBounced	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients that soft-bounced an email. A soft bounce often indicates a temporary issue with the recipient's email server, such as a full inbox. Available in API version 54.0 and later.
ReplyTrackableRecipientSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who received an email with reply tracking. Available in API version 54.0 and later.
ReplyTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent with reply tracking. Available in API version 54.0 and later.
SftBncTrackableRecipientSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who received an email with soft bounce tracking. Available in API version 53.0 and later.
SoftBounceTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent with soft bounce tracking. Available in API version 54.0 and later.

Field	Details
SomeEmailsDeliveredCount	Type int Properties Filter, Group, Nillable, Sort Description The number of sent emails that were successfully delivered to at least one of its recipients. Available in API version 54.0 and later. This field is a calculated field.
SomeEmailsDeliveredRate	Type percent Properties Filter, Nillable, Sort Description The percentage of sent and tracked emails that were successfully delivered to at least one of their recipients. Available in API version 54.0 and later. This field is a calculated field.
TemplateId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the email template or call script associated with this step. Available in API version 52.0 and later. This is a polymorphic relationship field. Relationship Name Template Relationship Type Lookup Refers To CallTemplate, EmailTemplate
TrackableRecipientSendHrdBncRt	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to unique recipients with hard bounce tracking that hard bounced. Available in API version 54.0 and later. This field is a calculated field.

Field	Details
TrackableRecipientSendOooRate	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage of emails sent with out-of-office tracking that received out-of-office replies from unique recipients. Available in API version 54.0 and later.
	This field is a calculated field.
TrackableRecipientSendReplyRt	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage of emails sent with reply tracking that received replies from unique recipients. Available in API version 54.0 and later.
	This field is a calculated field.
TrackableRecipientSendSftBncRt	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage of emails sent to unique recipients with soft bounce tracking that soft-bounced. Available in API version 54.0 and later.
	This field is a calculated field.
TrackableSendHardBounceRate	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage of emails sent with hard bounce tracking that hard bounced. Available in API version 54.0 and later.
	This field is a calculated field.
TrackableSendLinkClickRate	Type percent
	Properties Filter, Nillable, Sort

Field	Details
	Description The percentage of emails sent with link tracking that had link clicks. Available in API version 54.0 and later. This field is a calculated field.
TrackableSendOpenRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with open tracking that were opened by the recipient. Available in API version 54.0 and later. This field is a calculated field.
TrackableSendOutOfOfficeRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with out-of-office tracking that received out-of-office replies. Available in API version 54.0 and later. This field is a calculated field.
TrackableSendReplyRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with reply tracking that received replies. Available in API version 54.0 and later. This field is a calculated field.
TrackableSendSoftBounceRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with soft bounce tracking that soft bounced. Available in API version 54.0 and later. This field is a calculated field.

Field	Details
UniqueEmailsLinkClickedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of unique recipients who clicked a link in an email for this step in the month.
UniqueEmailsOpenedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of unique recipients who opened an email for this step in the month.
UniqueEmailsRepliedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of unique recipients who replied to an email for this step in the month.

ActionLinkGroupTemplate

Action link templates let you reuse action link definitions and package and distribute action links. An action link is a button on a feed element. Clicking on an action link can take a user to another Web page, initiate a file download, or invoke an API call to an external server or Salesforce. Use action links to integrate Salesforce and third-party services into the feed. Every action link belongs to an action link group and action links within the group are mutually exclusive. This object is available in API version 33.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Only users with the “Customize Application” permission can modify or delete this object.

Fields

Field Name	Details
Category	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The location of the action link group within the feed element. Values are: • Primary—The action link group is displayed in the body of the feed element. • Overflow—The action link group is displayed in the overflow menu of the feed element.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The name of the action link group template to use in code.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
ExecutionsAllowed	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The number of times an action link can be executed. Values are: • Once—An action link can be executed only once across all users. • OncePerUser—An action link can be executed only once for each user. • Unlimited—An action link can be executed an unlimited number of times by each user. If the action link's <code>actionType</code> is <code>Api</code> or <code>ApiAsync</code>, you can't use this value.
HoursUntilExpiration	Type int Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The number of hours from when the action link group is created until it's removed from associated feed elements and can no longer be executed. The maximum value is 8,760.
IsPublished	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If <code>true</code>, the action link group template is published. Action link group templates shouldn't be published until at least one ActionLinkTemplate is associated with it. Once set to <code>true</code>, this can't be set back to <code>false</code>.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the <code>MasterLabel</code>.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The name of the action link group template.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the

Field Name	Details
	installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.

Usage

Define action link templates in Setup and use `ConnectApi` in Apex or Connect REST API to instantiate action links from the templates and to post feed elements with the action links.

If you delete a published action link group template, you delete all related action link information which includes deleting all action links that were instantiated using the template from feed items.

ActionLinkTemplate

Action link templates let you reuse action link definitions and package and distribute action links. An action link is a button on a feed element. Clicking an action link can take a user to another Web page, initiate a file download, or invoke an API call to an external server or Salesforce. Use action links to integrate Salesforce and third-party services into the feed. This object is available in API version 33.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Only users with the “Customize Application” permission can modify or delete this object.

Fields

Field Name	Details
<code>ActionLinkGroupTemplateId</code>	Type reference Properties Create, Filter, Group, Sort Description ID of the ActionLinkGroupTemplate with which this action link template is associated. This is a relationship field.

Field Name	Details
	Relationship Name ActionLinkGroupTemplate Relationship Type Lookup Refers To ActionLinkGroupTemplate
ActionUrl	Type textarea Properties Create, Update Description The action link URL. For example, a <code>ui</code> action link URL is a Web page. A <code>Download</code> action link URL is a link to the file to download. <code>ui</code> and <code>Download</code> action link URLs are provided to clients. An <code>Api</code> or <code>ApiAsync</code> action link URL is a REST resource. <code>Api</code> and <code>ApiAsync</code> action link URLs aren't provided to clients. Links to Salesforce can be relative. All other links must be absolute and start with <code>https://</code>. Links to resources hosted on Salesforce servers can be relative, starting with a <code>/</code>. All other links must be absolute and start with <code>https://</code>. This field can contain context variables and binding variables in the form <code>{!Bindings.key}</code>, for example, <code>https://www.example.com/{!Bindings.itemId}</code>. Set the binding variable's value when you instantiate the action link group from the template.
Headers	Type textarea Properties Create, Nillable, Update Description Template for the HTTP headers sent when corresponding action links are invoked. This field can be used only for <code>Api</code> and <code>ApiAsync</code> action links. This field can contain context variables and binding variables in the form <code>{!Bindings.key}</code>.
IsConfirmationRequired	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If <code>true</code>, a confirmation dialog appears before the action is executed.

Field Name	Details
IsGroupDefault	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If <code>true</code>, action links derived from this template are the default or primary action in their action groups. There can be only one default action per action group.
Label	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A custom label to display on the action link button. If none of the <code>LabelKey</code> values make sense for an action link, use a custom label. Set the <code>LabelKey</code> field to <code>None</code> and enter a label name in the <code>Label</code> field. Action links have four states: new, pending, success, and failed. These strings are appended to the label for each state: • <code>Label</code> • <code>Label Pending</code> • <code>Label Success</code> • <code>Label Failed</code> For example, if the value of <code>Label</code> is "Call Home," the values of the four action link states are: Call Home, Call Home Pending, Call Home Success, and Call Home Failed. If <code>LabelKey</code> has any value other than <code>None</code>, the <code>Label</code> field is empty.
LabelKey	Type string Properties Create, Filter, Group, Sort, Update Description Key for the set of labels to display for these action link states: new, pending, success, failed. For example, the Approve set contains these labels: Approve, Pending, Approved, Failed. For a complete list of keys and labels, see Action Link Labels in the <i>Connect REST API Developer Guide</i>. If none of the label key values make sense for an action link, set this field to <code>None</code> and enter a custom label name in the <code>Label</code> field.
LinkType	Type picklist

Field Name	Details
	Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of action link. One of these values: • Api—The action link calls a synchronous API at the action URL. Salesforce sets the status to SuccessfulStatus or FailedStatus based on the HTTP status code returned by your server. • ApiAsync—The action link calls an asynchronous API at the action URL. The action remains in a PendingStatus state until a third party makes a request to <code>/connect/action-links/actionLinkId</code> to set the status to SuccessfulStatus or FailedStatus when the asynchronous operation is complete. • Download—The action link downloads a file from the action URL. • Ui—The action link takes the user to a web page at the action URL.
Method	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description HTTP method for the action URL. One of these values: • HttpDelete—Returns HTTP 204 on success. Response body or output class is empty. • HttpGet—Returns HTTP 200 on success. • HttpHead—Returns HTTP 200 on success. Response body or output class is empty. • HttpPatch—Returns HTTP 200 on success or HTTP 204 if the response body or output class is empty. • HttpPost—Returns HTTP 201 on success or HTTP 204 if the response body or output class is empty. Exceptions are the batch posting resources and methods, which return HTTP 200 on success. • HttpPut—Return HTTP 200 on success or HTTP 204 if the response body or output class is empty. Ui and Download action links must use HttpGet.
Position	Type int Properties Create, Filter, Group, Sort, Update Description An integer specifying the position of the action link template relative to other action links in the group. 0 is the first position.

Field Name	Details
RequestBody	Type textarea Properties Create, Nillable, Update Description Template for the HTTP request body sent when corresponding action links are invoked. This field can be used only for <code>Api</code> and <code>ApiAsync</code> action links. This field can contain context variables and binding variables in the form <code>{!Bindings.key}</code>.
UserAlias	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description If you selected <code>CustomUser</code> or <code>CustomExcludedUser</code> for <code>UserVisibility</code>, this field is the alias for the custom user. Use the alias in a template binding to specify the custom user when an action link group is created using the template.
UserVisibility	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Who can see the action link. This value is set per action link, not per action link group. One of these values: • <code>Creator</code>—Only the creator of the action link can see the action link. • <code>Everyone</code>—Everyone can see the action link. • <code>EveryoneButCreator</code>—Everyone but the creator of the action link can see the action link. • <code>Manager</code>—Only the manager of the creator of the action link can see the action link. • <code>CustomUser</code>—Only the custom user can see the action link. • <code>CustomExcludedUser</code>—Everyone but the custom user can see the action link.

Usage

Create action link templates in Setup. Use Apex classes in the `ConnectApi` namespace or Connect REST API to instantiate action links from templates and to post feed elements with the action links.

For information about action links, see [Working with Action Links](#) in the *Apex Developer Guide* or the *Connect REST API Developer Guide*.

ActionPlan

Represents the instance of an action plan, a set of tasks created from an action plan template. This object is available in API version 44.0 and later.

Supported Calls

`create()` `delete()` `describeLayout()` `describeSObjects()` `getDeleted()` `getUpdated()` `query()` `retrieve()` `undelete()` `update()` `upsert()`

Fields

Field Name	Details
<code>ActionPlanState</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The status of work being done for the action plan. Possible values are: • Canceled • Complete • In Progress • Not Started The default value is <code>Not Started</code>.
<code>ActionPlanTemplateVersionId</code>	Type reference Properties Create, Filter, Group, Sort Description The ID of the version of the action plan template used to create this action plan. At creation, the referenced action plan template must be in the published state.
<code>ActionPlanType</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The action plan's type.

Field Name	Details
	Possible values are: • Industries • Sales—This value is available in API version 63.0 and later with the Sales Action Plans add-on license and the Sales Action Plans default permission set. • Service
IsLocked	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the action plan is locked or not.
IsUsingHolidayHours	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether task completion dates have been calculated by incrementing the task offset for each non-work day, excluding recurring holidays.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The most recent date on which a user referenced this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The most recent date on which a user viewed this record.
MayEdit	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field Name	Details
	Description Indicates whether the action plan can be edited or not.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the action plan.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who owns this record.
StartDate	Type date Properties Create, Default on create, Filter, Group, Sort Description The start date of the action plan.
TargetId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the parent object record that relates to this action plan. For API version 63.0 and later, supported parent objects are Account, AccountPlanObjective, Applicant, ApplicationForm, ApplicationFormProduct, Asset, BusinessLicense, BusinessMilestone, Campaign, Case, ChangeRequest, Claim, Contact, Contract, FinancialGoal, Incident, InsurancePolicy, InsurancePolicyCoverage, Lead, Opportunity, PersonLifeEvent, Problem, ResidentialLoanApplication, WorkOrder, and WorkOrderLineItem. For API version 62.0 and later, supported parent objects are ApplicationFormEvaluation and VettingEvaluation. For API version 48.0 and later, supported parent objects are Account, AssetsAndLiabilities, BusinessMilestone, Campaign, Card, Case, Claim, Contact,

Field Name	Details
	Contract, Financial Account, Financial Goal, Financial Holding, InsurancePolicy, InsurancePolicyCoverage, Lead, Opportunity, PersonLifeEvent, ResidentialLoanApplication, and Visit as well as custom objects with activities enabled.
	For API version 47.0 and later, supported parent objects are Account, BusinessMilestone, Campaign, Case, Claim, Contact, Contract, InsurancePolicy, InsurancePolicyCoverage, Lead, Opportunity, PersonLifeEvent, and Visit as well as custom objects with activities enabled.
	For API version 46.0 and later, supported parent objects are Account, Campaign, Case, Contact, Contract, Lead, and Opportunity as well as custom objects with activities enabled.
	For API version 45.0 and earlier, the only supported parent object is Account.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

ActionPlanChangeEvent

Change events are available for the object.

ActionPlanFeed

Feed tracking is available for the object.

ActionPlanHistory

History is available for tracked fields of the object.

ActionPlanOwnerSharingRule

Sharing rules are available for the object.

ActionPlanShare

Sharing is available for the object.

ActionPlanItem

Represents the instance of an action plan item. This object is available in API version 44.0 and later.

Supported Calls

`create()` `delete()` `describeLayout()` `describeSObjects()` `getDeleted()` `getUpdated()` `query()` `retrieve()` `undelete()` `update()` `upsert()`

Fields

Field Name	Details
ActionPlanId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Sort Description The ID of the action plan that this item belongs to.
ActionPlanTemplateItemId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the action plan template item this item was created from.
IsLocked	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this action plan item is locked or not. The default value is <code>false</code> .
IsRequired	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether this action plan item is required or not.
ItemEntityType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of object used with the item. This field is available in API version 61.0 and later. Possible values are: • <code>AssessmentTask</code>—Assessment Task • <code>DocumentChecklistItem</code>—Document Checklist Item • <code>Event</code>—Available only with sales action plans in API version 63.0 and later with the Sales Action Plans add-on license and the Sales Action Plans default permission set.

Field Name	Details
	• <code>GenericVisitTask</code>—Generic Visit Task • <code>OtherComponentTask</code>—Other Component Task • <code>RecordAction</code> • <code>SignatureTask</code>—Signature Task • <code>Task</code>
ItemId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the record created by this action plan item. This field is a polymorphic relationship field. Relationship Name Item Refers To DocumentChecklistItem, Event, RecordAction, Task
ItemState	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The action plan item's work state. Possible values are: • Canceled • Completed • Deleted • In Progress • Pending
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of this action plan item.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

ActionPlanItemChangeEvent

Change events are available for the object.

ActionPlanItemFeed

Feed tracking is available for the object.

ActionPlanItemHistory

History is available for tracked fields of the object.

ActionPlanItemOwnerSharingRule

Sharing rules are available for the object.

ActionPlanItemShare

Sharing is available for the object.

ActionPlanTemplate

Represents the instance of an action plan template. This object is available in API version 44.0 and later.

Supported Calls

`create()``delete()``describeLayout()``describeObjects()``getDeleted()``getUpdated()``query()``retrieve()``search()``undelete()``update()``upsert()`

Fields

Field Name	Details
ActionPlanType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort Description This action plan template’s type. Possible values are: - Industries - Sales—This value is available in API version 63.0 and later with the Sales Action Plans add-on license and the Sales Action Plans default permission set. - Service
Category	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field Name	Details
	Description Specifies the category that the action plan template belongs to. Available in API version 64.0 and later. Possible values are: • Onboarding • Application
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The description of this action plan template.
EstimatedCompletionDays	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The estimated number of days to complete the action plan. Available in API version 64.0 and later.
FileBasedTemplatePath	Type string Properties Filter, Group, Nillable, Sort Description The path of the file based template using which the action plan template is created. Available in API version 64.0 and later.
IsAdHocItemCreationEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether users can add tasks or other items to generated action plans (<code>true</code>) or not (<code>false</code>).
IsLocked	Type boolean

Field Name	Details
	Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this action plan template is locked or not. The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The most recent date on which a user referenced this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The most recent date on which a user viewed this record.
MayEdit	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this action plan template can be edited or not. The default value is <code>false</code>.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of this action plan template.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field Name	Details
	Description The ID of the user who owns this action plan template. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
SourceType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the source type to which the action plan template belongs to. Available in API version 64.0 and later. Possible values are: • CRM • MigratedFromSandbox
Status	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The status of this action plan template. Possible values are: • Draft • Final-Published • Obsolete • ReadOnly
Subcategory	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The subcategory to which the action plan template belongs. Available in API version 64.0 and later. Possible values are:

Field Name	Details
	- Product Onboarding - Customer Onboarding
TargetEntityType	Type picklist Properties Create, Defaulted on create, Group, Restricted picklist, Sort Description The parent object this action plan template relates to. Possible values are organized by the API version in which they were introduced. Values are available in all versions after introduction unless noted otherwise. API Version 62.0 and later with Financial Services: - AccountPlanObjective - FinancialDeal - PartyProfile API Version 62.0 and later with Public Sector Solutions: - ApplicationFormEvaluation - VettingEvaluation API version 60.0 and later with Education Cloud - ProgramEnrollment API version 58.0 and later with Health Cloud - CareBarrier API version 58.0 and later with Nonprofit Cloud: - Benefit - Program API Version 58.0 and later with Public Sector Solution and Education Cloud: - ApplicationDecision - ApplicationReview - Benefit - Program API Version 56.0 and later with Automotive Cloud: - Account - Asset - Asset Account Participant - Asset Contact Participant - Asset Milestone - Fleet

Field Name	Details
	• Lead • Opportunity • Record Alert • Vehicle • Case • Claim • Contact
	API Version 58.0 and later with Grantmaking:
	• ApplicationDecision • ApplicationReview • Benefit • Budget • BudgetAllocation • CareBarrier • FundingAward • FundingAwardAmendment • FundingAwardRequirement • FundingDisbursement • FundingOpportunity • Program
	API Version 52.0 and later:
	• BusinessLicenseApplication • IndividualApplication • PublicComplaint • RegulatoryCodeViolation • ViolationEnforcementAction
	API Version 47.0 and later:
	• BusinessMilestone • Claim • InsurancePolicy • InsurancePolicyCoverage • PersonLifeEvent • Visit
	API Version 46.0 and later:
	• Campaign—Unsupported for Grantmaking. • Case • Contact

Field Name	Details
	- Contract - Lead - Opportunity - Custom objects with activities enabled API Version 44.0 and later: Account
UniqueName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name for this action plan template. This field is unique within your organization.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

ActionPlanTemplateChangeEvent

Change events are available for the object.

ActionPlanTemplateFeed

Feed tracking is available for the object.

ActionPlanTemplateHistory

History is available for tracked fields of the object.

ActionPlanTemplateOwnerSharingRule

Sharing rules are available for the object.

ActionPlanTemplateShare

Sharing is available for the object.

ActionPlanTemplateItem

Represents the instance of an item on an action plan template version. This object is available in API version 44.0 and later.

Supported Calls

`create()` `delete()` `describeLayout()` `describeObjects()` `getDeleted()` `getUpdated()` `query()` `retrieve()` `search()` `undelete()` `update()` `upsert()`

Fields

Field Name	Details
ActionPlanTemplateVersionId	Type reference Properties Create, Filter, Group, Sort, Description The version of the action plan template this item is for.
DisplayOrder	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The order in which this item is displayed within the action plan template version.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the task created from this template item is active. The default value is <code>false</code>.
IsLocked	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this action plan template item is locked or not. The default value is <code>false</code>.
IsRequired	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the task created from this template item is required. The default value is <code>false</code>.

Field Name	Details
ItemEntityType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of action plan template item entity.. Possible values are: • Document Checklist Item • Event—This value is available in API version 63.0. • RecordAction • Task
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The most recent date on which a user referenced this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The most recent date on which a user viewed this record.
MayEdit	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this action plan template item can be edited or not. The default value is <code>false</code>.
Name	Type string Properties Create, Filter, Group, Sort, idLookup, Update

Field Name	Details
	Description The unique identifier for this action plan template item record.
UniqueName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name for this action plan template item. This field is unique within your organization.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

ActionPlanTemplateItemChangeEvent

Change events are available for the object.

ActionPlanTemplateItemFeed

Feed tracking is available for the object.

ActionPlanTemplateItemHistory

History is available for tracked fields of the object.

ActionPlanTemplateItemOwnerSharingRule

Sharing rules are available for the object.

ActionPlanTemplateItemShare

Sharing is available for the object.

ActionPlanTemplateItemValue

Represents the value associated with an action plan template item. This object is available in API version 44.0 and later.

Supported Calls

`create()` `delete()` `describeLayout()` `describeObjects()` `getDeleted()` `getUpdated()` `query()` `retrieve()` `search()` `undelete()` `update()` `upsert()`

Fields

Field Name	Details
ActionPlanTemplateItemId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Sort Description The ID of the action plan template item that this value relates to. Relationship Name ActionPlanTemplateItem Relationship Type Master-detail Refers To ActionPlanTemplateItem (the master object)
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the task created from this template item is active. The default value is <code>false</code>.
IsLocked	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this action plan template item value is locked or not. The default value is <code>false</code>.
ItemEntityFieldName	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The name of the field on the action plan template item that this value is for. Available fields include: • <code>AssessmentTask.AssessmentTaskDefinitionId</code>—Assessment Task Definition ID • <code>AssessmentTask.AssignedToId</code>—AssignedTo ID • <code>AssessmentTask.Description</code>—Description • <code>AssessmentTask.EndTime</code>—End Time • <code>AssessmentTask.IsRequired</code>—Required

Field Name	Details
	• <code>AssessmentTask.Name</code>—Name • <code>AssessmentTask.OwnerId</code>—Owner ID • <code>AssessmentTask.ParentId</code>—Visit ID • <code>AssessmentTask.ReferenceRecordId</code>—ReferenceRecord ID • <code>AssessmentTask.SequenceNumber</code>—Sequence • <code>AssessmentTask.StartTime</code>—Start Time • <code>AssessmentTask.Status</code>—Status • <code>AssessmentTask.TaskDefinitionId</code>—TaskDefinition ID • <code>AssessmentTask.TaskType</code>—Task Type • <code>DocumentChecklistItem.Comments</code>—Comments • <code>DocumentChecklistItem.DocumentCategoryId</code>—Document Category ID • <code>DocumentChecklistItem.DocumentTypeId</code>—Document Type ID • <code>DocumentChecklistItem.Instruction</code>—Instructions • <code>DocumentChecklistItem.IsAccepted</code>—Accepted • <code>DocumentChecklistItem.IsFrozen</code>—Frozen • <code>DocumentChecklistItem.IsRequired</code>—Required • <code>DocumentChecklistItem.Name</code>—Name • <code>DocumentChecklistItem.OwnerId</code>—Owner ID • <code>DocumentChecklistItem.ParentRecordId</code>—Parent Record ID • <code>DocumentChecklistItem.ReceivedDocumentId</code>—Received Document ID • <code>DocumentChecklistItem.Status</code>—Status • <code>DocumentChecklistItem.ValidatedById</code>—User ID • <code>DocumentChecklistItem.ValidationDateTime</code>—Validation Date Time • <code>DocumentChecklistItem.WhoId</code>—Who ID • <code>Event.ActivityDate</code>—Due Date Only • <code>Event.ActivityDateTime</code>—Due Date Time • <code>Event.Description</code>—Description • <code>Event.DurationInMinutes</code>—Duration • <code>Event.EndDateTime</code>—End Date Time • <code>Event.EventSubtype</code>—Event Subtype • <code>Event.IsAllDayEvent</code>—All-Day Event • <code>Event.IsPrivate</code>—Private • <code>Event.IsRecurrence</code>—Create Recurring Series of Events • <code>Event.IsReminderSet</code>—Reminder Set • <code>Event.Location</code>—Location

Field Name	Details
	• <code>Event.OwnerId</code>—Assigned To ID • <code>Event.Recurrence2PatternText</code>—Recurrence Pattern • <code>Event.RecurrenceDayOfMonth</code>—Recurrence Day of Month • <code>Event.RecurrenceDayOfWeekMask</code>—Recurrence Day of Week Mask • <code>Event.RecurrenceEndDateOnly</code>—Recurrence End • <code>Event.RecurrenceInstance</code>—Recurrence Instance • <code>Event.RecurrenceInterval</code>—Recurrence Interval • <code>Event.RecurrenceMonthOfYear</code>—Recurrence Month of Year • <code>Event.RecurrenceStartDateTime</code>—Recurrence Start • <code>Event.RecurrenceTimeZoneSidKey</code>—Recurrence Time Zone • <code>Event.RecurrenceType</code>—Recurrence Type • <code>Event.ReminderDateTime</code>—Reminder Date/Time • <code>Event.ShowAs</code>—Show Time As • <code>Event.StartDateTime</code>—Start Date Time • <code>Event.Subject</code>—Subject • <code>Event.Type</code>—Type • <code>Event.WhatId</code>—Related To ID • <code>Event.WhoId</code>—Name ID • <code>GenericVisitTask.DefinitionReferenceId</code>—Generic Visit Task ID • <code>GenericVisitTask.Description</code>—Description • <code>GenericVisitTask.EndDateTime</code>—End Date Time • <code>GenericVisitTask.IsRequired</code>—Required • <code>GenericVisitTask.Name</code>—Name • <code>GenericVisitTask.OwnerId</code>—Owner ID • <code>GenericVisitTask.Sequence</code>—Sequence • <code>GenericVisitTask.StartDateTime</code>—Start Date Time • <code>GenericVisitTask.Status</code>—Status • <code>GenericVisitTask.VisitId</code>—Visit ID • <code>OtherComponentTask.Description</code>—Description • <code>OtherComponentTask.FullyQualifiedName</code>—Fully Qualified Name • <code>OtherComponentTask.Name</code>—Name • <code>OtherComponentTask.OwnerId</code>—Owner ID • <code>OtherComponentTask.ParentTaskId</code>—Assessment Task ID • <code>OtherComponentTask.ParticipantRoleId</code>—Participant Role ID • <code>RecordAction.ActionDefinition</code>—Action Definition

Field Name	Details
	- RecordAction.ActionType—Action Type - RecordAction.FlowDefinition—Interaction Definition ID - RecordAction.FlowInterviewId—FlowInterview ID - RecordAction.IsMandatory—Is Mandatory - RecordAction.IsUiRemoveHidden—Hide Remove Action in UI - RecordAction.Order—Order - RecordAction.ParticipantRoleId—ParticipantRole ID - RecordAction.Pinned—Pinned - RecordAction.RecordId—Parent Record ID - RecordAction.Status—Status - SignatureTask.Description—Description - SignatureTask.Name—Name - SignatureTask.ParentTaskId—Assessment Task ID - Task.APT_Custom_Text_1_c__c—APT Custom Text - 1 - Task.ActivityDate—Due Date Only - Task.Boolean_Test__c—Boolean Test - Task.CallDisposition—Call Result - Task.CallDurationInSeconds—Call Duration - Task.CallObject—Call Object Identifier - Task.CallType—Call Type - Task.Custom_Picklist__c—Custom Picklist - Task.Description—TEstActivityDEs - Task.IsRecurrence—Create Recurring Series of Tasks - Task.IsReminderSet—Reminder Set - Task.OwnerId—Assigned To ID - Task.Priority—Priority - Task.RecurrenceDayOfMonth—Recurrence Day of Month - Task.RecurrenceDayOfWeekMask—Recurrence Day of Week Mask - Task.RecurrenceEndDateOnly—Recurrence End - Task.RecurrenceInstance—Recurrence Instance - Task.RecurrenceInterval—Recurrence Interval - Task.RecurrenceMonthOfYear—Recurrence Month of Year - Task.RecurrenceRegeneratedType—Repeat This Task - Task.RecurrenceStartDateOnly—Recurrence Start - Task.RecurrenceTimeZoneSidKey—Recurrence Time Zone - Task.RecurrenceType—Recurrence Type - Task.ReminderDateTime—Reminder Date/Time - Task.Status—Status

Field Name	Details
	• <code>Task.Subject</code>—Subject • <code>Task.TaskSubtype</code>—Task Subtype • <code>Task.Type</code>—Type • <code>Task.WhatId</code>—Related To ID • <code>Task.WhoId</code>—Name ID • <code>Task.test__c</code>—test • <code>Task.text_3__c</code>—text 3
<code>ItemEntityType</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of action plan template item. Possible values are: • <code>Document Checklist Item</code> • <code>Event</code>—Available in API version 63.0 and later with the Sales Action Plans add-on license and the Sales Action Plans default permission set. • <code>RecordAction</code> • <code>Task</code>
<code>LastReferencedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The most recent date on which a user referenced this record.
<code>LastViewedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The most recent date on which a user viewed this record.
<code>MayEdit</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field Name	Details
	Description Indicates whether this action plan template item value can be edited or not. The default value is <code>false</code> .
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The unique identifier for this record.
ValueFormula	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A formula used to calculate the value for this action plan template item.
ValueLiteral	Type textarea Properties Create, Filter, Nillable, Update Description The value for this action plan template item.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ActionPlanTemplateItemValueChangeEvent](#)

Change events are available for the object.

[ActionPlanTemplateItemValueFeed](#)

Feed tracking is available for the object.

[ActionPlanTemplateItemValueHistory](#)

History is available for tracked fields of the object.

[ActionPlanTemplateItemValueOwnerSharingRule](#)

Sharing rules are available for the object.

[ActionPlanTemplateItemValueShare](#)

Sharing is available for the object.

ActionPlanTemplateVersion

Represents the version of an action plan template. This object is available in API version 44.0 and later.

Supported Calls

`create()` `delete()` `describeLayout()` `describeSObjects()` `getDeleted()` `getUpdated()` `query()` `retrieve()` `search()` `undelete()` `update()` `upsert()`

Fields

Field Name	Details
ActionPlanTemplateId	Type reference Properties Create, Filter, Group, Sort, Group Description The ID of the action plan template this version represents.
ActivationDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Description The date and time at which this version became active.
InactivationDateTime	Type dateTime Properties Create, Filter, Nillable, Sort Description The date and time at which this version became inactive.
IsLocked	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this action plan template version is locked or not. The default value is <code>false</code> .

Field Name	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort, , Sort Description The most recent date on which a user referenced this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The most recent date on which a user viewed this record.
MayEdit	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this action plan template version can be edited. The default value is <code>false</code>.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update, Description The name of this version item.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The action plan template version's state. Possible values are: • Draft • Final - Published • Obsolete • ReadOnly

Field Name	Details
Version	Type int Properties Create, Defaulted on create, Filter, Group, Sort Description The index number of this action plan template version.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[ActionPlanTemplateVersionChangeEvent](#)

Change events are available for the object.

[ActionPlanTemplateVersionFeed](#)

Feed tracking is available for the object.

[ActionPlanTemplateVersionHistory](#)

History is available for tracked fields of the object.

[ActionPlanTemplateVersionOwnerSharingRule](#)

Sharing rules are available for the object.

[ActionPlanTemplateVersionShare](#)

Sharing is available for the object.

ActiveFeatureLicenseMetric

Represents the number of active, assigned, and purchased feature licenses in the org. This object is available in API version 52.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
ActiveUserCount	Type int Properties Filter, Group, Nillable, Sort Description Number of users assigned this feature license who have logged in within the last 30 days.

Field	Details
AssignedUserCount	Type int Properties Filter, Group, Nillable, Sort Description Number of users assigned this feature license.
FeatureType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Type of feature license. Possible values are: • AvantgoUser—AvantGo User • ChatterAnswersUser—Chatter Answers User • InteractionUser—Flow User • JigsawProspectingUser—Data.com User • KnowledgeUser—Knowledge User • LiveAgentUser—Chat User • MarketingUser—Marketing User • MobileUser—Apex Mobile User • OfflineUser—Offline User • SFContentUser—Salesforce CRM Content User • SiteforceContributorUser—Site.com Contributor User • SiteforcePublisherUser—Site.com Publisher User • SupportUser—Service Cloud User • WirelessUser—Wireless User • WorkDotComUserFeature—WDC User
MetricsDate	Type date Properties Filter, Group, Sort Description Date that feature license metrics were collected.
TotalLicenseCount	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort
	Description The number of feature licenses in the organization.

ActivePermSetLicenseMetric

Represents the number of active, assigned, and purchased permission set licenses in the org. This object is available in API version 52.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
ActiveUserCount	Type int Properties Filter, Group, Nillable, Sort Description Number of users assigned this permission set license who have logged in within the last 30 days.
AssignedUserCount	Type int Properties Filter, Group, Nillable, Sort Description Number of users assigned this permission set license.
DeveloperName	Type string Properties Filter, Group, Nillable, Sort Description The unique name of this permission set license object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin

Field	Details
	with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores.
MasterLabel	Type string Properties Filter, Group, Nillable, Sort Description The label of the permission set license.
MetricsDate	Type date Properties Filter, Group, Sort Description Date that permission set license metrics were collected.
PermissionSetLicenseId	Type reference Properties Filter, Group, Sort Description The ID of the permission set license. This is a relationship field. Relationship Name PermissionSetLicense Relationship Type Lookup Refers To PermissionSetLicense
TotalLicenses	Type int Properties Filter, Group, Nillable, Sort Description The total number of this permission set licenses that are available to your org.

ActiveProfileMetric

Represents the profile associated with the active, assigned, and purchased user licenses. This object is available in API version 52.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
ActiveUserCount	Type int Properties Filter, Group, Nillable, Sort Description Number of users assigned this profile who have logged in within the last 30 days.
AssignedUserCount	Type int Properties Filter, Group, Nillable, Sort Description Number of users assigned this profile.
MetricsDate	Type date Properties Filter, Group, Sort Description Date that profile metrics were collected.
ProfileId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the profile. This is a relationship field. Relationship Name Profile

Field	Details
	Relationship Type Lookup Refers To Profile
UserLicenseId	Type reference Properties Filter, Group, Sort Description The ID of the user license. This is a relationship field. Relationship Name UserLicense Relationship Type Lookup Refers To UserLicense

ActiveScratchOrg

Represents an active scratch org. This object is available in API version 41.0 and later.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Fields

Field Name	Details
Description	Type textarea Properties Create, Nillable, Update Description A description of this scratch org.

Field Name	Details
Edition	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The org edition of this scratch org. Possible values are Group, Developer, Enterprise, and Professional. This field is read only.
ExpirationDate	Type date Properties Filter, Group, Nillable, Sort Description Date when the scratch org expires. This field is read only.
Features	Type textarea Properties Nillable Description The features enabled in this scratch org, such as MultiCurrency. See the <i>Salesforce DX Developer Guide</i> for the full list of valid features. This field is read only.
HasSampleData	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Specifies whether the scratch org contains sample data. If set to <code>true</code>, the sample data is similar to the data in a Salesforce free trial org.
LastLoginDate	Type date Properties Filter, Group, Nillable, Sort Description The date of the last user login to the scratch org. This field is read only.
LastReferencedDate	Type dateTime

Field Name	Details
	Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record. This field is read only.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, and LastReferenceDate isn't null, the user accessed this record or list view indirectly. This field is read only.
Name	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description The auto-generated ID of this scratch org. This field is read only.
Namespace	Type string Properties Filter, Group, Nillable, Sort Description The namespace associated with this scratch org. This field is read only.
OrgName	Type string Properties Filter, Group, Nillable, Sort Description The name of the scratch org. This field is read only.
OwnerId	Type reference Properties Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who owns this scratch org. This field is read only.

Field Name	Details
ScratchOrg	Type string Properties Filter, Group, Sort Description The org ID of the scratch org. This field is read only.
ScratchOrgInfoId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The id of the associated <code>ScratchOrgInfo</code> object. This field is read only.
SignupEmail	Type email Properties Filter, Group, Nillable, Sort Description The email address of the Administration user. This field is read only.
SignupInstance	Type string Properties Filter, Group, Nillable, Sort Description The Salesforce instance on which this scratch org resides. This field is read only.
SignupTrialDays	Type int Properties Filter, Group, Nillable, Sort Description The number of days between the scratch org's creation and expiration. This field is read only.
SignupUsername	Type string Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description The username of the Administration user of the scratch org. This field is read only.
Snapshot	Type string Properties Filter, Group, Nillable, Sort Description If this scratch org was created from a scratch org snapshot, then this field contains either the name or ID of the snapshot. Specifically, the name corresponds to the <code>Name</code> field of the snapshot's record in the <code>OrgSnapshot</code> standard object; the ID corresponds to the record ID. If this scratch org wasn't created from a snapshot, this field is empty. This field is read only. This field is available in API version 61.0 and later.

Usage

Salesforce automatically creates an instance of this object after a `ScratchOrgInfo` record moves to the Active state. The new `ActiveScratchOrg` gets many of its field values from the `ScratchOrgInfo` object with which it's associated.

When you delete an `ActiveScratchOrg` record, its associated scratch org is deleted and its associated `ScratchOrgInfo` record is moved to the Deleted state.

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

ActiveScratchOrgFeed

Feed tracking is available for the object.

ActiveScratchOrgHistory

History is available for tracked fields of the object.

ActiveScratchOrgShare

Sharing is available for the object.

SEE ALSO:

[ScratchOrgInfo](#)

[NamespaceRegistry](#)

[Salesforce DX Developer Guide](#)

ActivityFieldHistory

Represents a change in a field value for a tracked object or field. This object is a big object. This object is available in API version 55.0 and later.

Supported Calls

`delete()` `describeSObjects()` `query()` `retrieve()`

Special Access Rules

To see this object, users must have ViewAllData permissions.

Fields

Field	Details
ActivityId	Type reference Properties Filter, Sort Description The ID of the task or event that changed. This field is a polymorphic relationship field. Relationship Name Activity Refers To Event, Task
ChangedById	Type reference Properties Filter, Sort Description The ID of the user who made the change. This field is a relationship field. Relationship Name ChangedBy Refers To User
ChangedDate	Type dateTime

Field	Details
	Properties Filter, Sort Description The date the field value changed.
DataType	Type picklist Properties Restricted picklist Description The type of the field with the changed value. Possible values are: • Address • AnyType • AutoNumber • Base64 • BitVector • Boolean • Content • Currency • DataCategoryGroupReference • DateOnly • DateTime • Division • Double • DynamicEnum • Email • EncryptedBase64 • EncryptedText • EntityId • EnumOrId • ExternalId • Fax • File • HtmlMultiLineText • HtmlStringPlusClob • InetAddress • Json

Field	Details
	• Location • MultiEnum • MultiLineText • Namespace • Percent • PersonName • Phone • Raw • RecordType • SfdcEncryptedText • SimpleNamespace • StringPlusClob • Switchable_PersonName • Text • TimeOnly • Url • YearQuarter
FieldName	Type string Properties Filter, Sort Description The name of the field changed.
IsDataAvailable	Type boolean Properties Defaulted on create Description Indicates whether valid data is available in the old and new value fields. This field is <code>false</code> if, for example, the fields are encrypted or the changed values are too large, such as for Description field types. The default value is <code>false</code>.
NewValueDateTime	Type dateTime Properties Nillable

Field	Details
	Description The new value for date type fields.
NewValueNumber	Type double Properties Nillable Description The new value for number type fields.
NewValueText	Type string Properties Nillable Description The new value for all other field types that are not a date or number type.
OldValueDateTime	Type dateTime Properties Nillable Description Old value for date type fields.
OldValueNumber	Type double Properties Nillable Description Old value for number type fields.
OldValueText	Type string Properties Nillable Description The old value for all other field types that are not a date or number type.
Operation	Type picklist Properties Restricted picklist

Field	Details
	Description The operation of the field value change. Possible values are: • delete • update

Indexed Fields

When you're querying ActivityFieldHistory with SOQL, you must specify indexed fields in the `WHERE` clause filter starting from the first field defined in the index. If you specify a partial list of indexed fields, don't leave any gaps between indexed fields after the first field. Here are the indexed fields for ActivityFieldHistory, listed from first to last in the index order.

1. ActivityId
2. ChangedDate
3. ChangedById
4. FieldName
5. ActivityFieldChange

For example, this SOQL query succeeds because the first three indexed fields are in the `WHERE` clause.

```
SELECT ActivityId, OldValueText, NewValueText, FieldName, ChangedDate
FROM ActivityFieldHistory
WHERE ActivityId = 'SomeId' AND ChangedDate >= :startDate AND ChangedDate <= :endDate
ORDER BY ChangedDate
```

If you remove the `ActivityId` field from the `WHERE` clause, the query fails.

```
SELECT ActivityId, OldValueText, NewValueText, FieldName, ChangedDate
FROM ActivityFieldHistory
WHERE ChangedDate >= :startDate AND ChangedDate <= :endDate
ORDER BY ChangedDate
```

SEE ALSO:

[Big Objects Implementation Guide: SOQL with Big Objects](#)

[Big Objects Implementation Guide: Big Objects](#)

ActivityHistory

This read-only object is displayed in a related list of closed activities—past events and closed tasks—related to an object. It includes activities for all contacts related to the object. ActivityHistory fields for phone calls are only available if your organization uses Salesforce CRM Call Center.

Supported Calls

`describeSObjects()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Fields

Field	Details
AccountId	Type reference Properties Filter, Group, Nillable, Sort Description Indicates the ID of the related account, which is determined as follows: • The account associated with the <code>whatId</code>, if it exists; or • The account associated with the <code>whoId</code>, if it exists; otherwise • <code>null</code> For information on IDs, see ID Field Type. This is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
ActivityDate	Type date Properties Filter, Group, Nillable, Sort Description Indicates one of the following: • The due date of a task • The due date of an event if <code>IsAllDayEvent</code> is set to <code>true</code> This field has a time stamp that is always set to midnight in the Universal Time Coordinated (UTC) time zone. The time stamp doesn't represent the time of the activity; don't attempt to alter it to accommodate time zone differences. Label is <code>Date</code>.
ActivityDateTime	Type dateTime

Field	Details
	Properties Aggregate, Filter, Nillable, Sort Description Contains the event's due date if the <code>IsAllDayEvent</code> flag is set to <code>false</code>. The time portion of this field is always transferred in the Coordinated Universal Time (UTC) time zone. Translate the time portion to or from a local time zone for the user or the application, as appropriate. Label is Due Date Time. The value for this field and <code>StartDateTime</code> must match, or one of them must be <code>null</code>.
ActivitySubtype	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Provides standard subtypes to facilitate creating and searching for specific activity subtypes. This field isn't updateable. Possible values are: • Task • Email • Call • Event • LinkedIn —Available in API version 56.0 and later. • List Email
ActivityType	Type picklist Properties Filter, Group, Nillable, Sort Description Represents one of the following values: <code>Call</code>, <code>Email</code>, <code>Meeting</code>, or <code>Other</code>. Label is <code>Type</code>. These are default values, and can be changed. <code>ActivityType</code> is the union of <code>TaskType</code> and <code>EventType</code>. If the same activity appears in both dynamic picklists, duplicate activities appear. <code>TaskType</code> and <code>EventType</code> can each have a <code>Call</code> type. Internally, they are distinct from each other.
AlternateDetailId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description The ID of a record the activity is related to which contains more details about the activity. For example, an activity can be related to an EmailMessage record. This is a relationship field. Relationship Name AlternateDetail Relationship Type Lookup Refers To EmailMessage
CallDisposition	Type string Properties Filter, Group, Nillable, Sort Description Represents the result of a given call, for example, "we'll call back," or "call unsuccessful." Limit is 255 characters.
CallDurationInSeconds	Type int Properties Filter, Group, Nillable, Sort Description Duration of the call in seconds.
CallObject	Type string Properties Filter, Group, Nillable, Sort Description Name of a call center. Limit is 255 characters.
CallType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of call being answered: Inbound, Internal, or Outbound.

Field	Details
CompletedDateTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time the task was saved with a Closed status. - For insert, if the task is saved with a Closed status the field is set. If the task is saved with an Open status the field is set to NULL. - For update, if the task is saved with a new Closed status, the field is reset. If the task is saved with a new non-closed status, the field is reset to NULL. If the task is saved with the same closed status (that is, unchanged) there is no change to the field.  Note: The status is a dynamic enum. If the Closed mapping is changed it won't cause an update of existing tasks. Only new insert/update operations are affected.
ConnectionReceivedId	Type reference Properties Filter, Group, Nillable, Sort Description Indicates the ID of the PartnerNetworkConnection that shared this record with your organization. This field is available only if your organization has enabled Salesforce to Salesforce and only in API versions 28.0 and later.
ConnectionSentId	Type reference Properties Filter, Group, Nillable, Sort Description Indicates the ID of the PartnerNetworkConnection that your organization shared this record with. This field is available only if your organization has enabled Salesforce to Salesforce, and only in API versions 28.0 and later. The value is always null. You can use the PartnerNetworkRecordConnection object to forward records to connections.
Description	Type textarea Properties Nillable Description Contains a description of the event or task. Limit is 32 KB.

Field	Details
Division	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description A logical segment of your organization's data. For example, if your company is organized into different business units, you could create a division for each business unit, such as "North America," "Healthcare," or "Consulting." Available only if the organization has the Division permission enabled.
DurationInMinutes	Type int Properties Filter, Group, Nillable, Sort Description Indicates the duration of the event or task.
EndTime	Type dateTime Properties Filter, Nillable, Sort Description Indicates the end date and time of the event or task. Available in versions 27.0 and later. This field is optional, depending on the following: • If <code>IsAllDayEvent</code> is true, you can supply a value for either <code>DurationInMinutes</code> or <code>EndTime</code>. Supplying values in both fields is allowed if the values add up to the same amount of time. If both fields are <code>null</code>, the duration defaults to one day. • If <code>IsAllDayEvent</code> is false, a value must be supplied for either <code>DurationInMinutes</code> or <code>EndTime</code>. Supplying values in both fields is allowed if the values add up to the same amount of time.
IsAllDayEvent	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If the value of this field is set to <code>true</code>, then the activity is an event spanning a full day, and the <code>ActivityDate</code> defines the date of the event. If the value of this field is set to <code>false</code>, then the activity may be an event spanning less than a full day, or it may be a task. The default value of this field is <code>false</code>. Label is <code>All-Day Event</code>.

Field	Details
IsClosed	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a task is closed (<code>true</code>) or not closed (<code>false</code>). The default value of this field is <code>false</code>. This field is set indirectly by setting the <code>Status</code> field on the task—each picklist value has a corresponding <code>IsClosed</code> value. Label is <code>Closed</code>.
IsDeleted	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the activity has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is <code>Deleted</code>.
IsHighPriority	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates a high-priority task. This field is derived from the <code>Priority</code> field. The default value of this field is <code>false</code>.
IsOnlineMeeting	Type boolean Properties Defaulted on create, Filter Description Indicates whether the activity represents an online meeting (<code>true</code>) or not (<code>false</code>).  Note: This field is not available in API version 16.0 or later.
IsReminderSet	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a reminder is set for an activity (<code>true</code>) or not (<code>false</code>). The default value of this field is <code>false</code>.

Field	Details
IsTask	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If the value of this field is set to <code>true</code>, then the activity is a task. If the value is set to <code>false</code>, then the activity is an event. The default value of this field is <code>false</code>. Label is <code>Task</code>.
IsVisibleInSelfService	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If the value of this field is set to <code>true</code>, then the activity can be viewed in the self-service portal. The default value of this field is <code>false</code>. Label is <code>Visible in Self-Service</code>.
Location	Type string Properties Filter, Group, Nillable, Sort Description If the activity is an event, then this field contains the location of the event. If the activity is a task, then the value is <code>null</code>.
OwnerId	Type reference Properties Filter, Group, Nillable, Sort Description Indicates the ID of the user or group who owns the activity. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Calendar, Group, User
PrimaryAccountId	Type reference

Field	Details
	Properties Filter, Group, Nillable, Sort Description Contains the <code>AccountId</code> value from the activity record. Available in API versions 30.0 and later to organizations that use Shared Activities.
PrimaryWhoId	Type reference Properties Filter, Group, Nillable, Sort Description Contains the <code>whoId</code> value from the activity record. Available in API versions 30.0 and later to organizations that have enabled Shared Activities.
Priority	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Sort Description Indicates the priority of a task, such as high, normal, or low. The default value of this field is <code>Normal</code>.
ReminderDateTime	Type dateTime Properties Filter, Nillable, Sort Description Represents the time when the reminder is scheduled to fire, if <code>IsReminderSet</code> is set to <code>true</code>. If <code>IsReminderSet</code> is set to <code>false</code>, then the user may have deselected the reminder checkbox in the Salesforce user interface, or the reminder has already fired at the time indicated by the value.
StartDateTime	Type dateTime Properties Filter, Nillable, Sort Description Indicates the start date and time of the event. Available in versions 29.0 and later. If the event's <code>IsAllDayEvent</code> flag is set to <code>true</code> (indicating an all-day event), then the time stamp in <code>StartDateTime</code> is always set to midnight in the Coordinated Universal Time (UTC) time zone.

Field	Details
	 Note: Don't attempt to alter the time stamp to account for any time zone differences. If the event's <code>IsAllDayEvent</code> flag is set to false, then you must translate the time portion of the time stamp in <code>StartDateTime</code> to or from a local time zone for the user or the application, as appropriate. The translation must be in the Coordinated Universal Time (UTC) time zone. If this field has a value, then <code>ActivityDate</code> and <code>ActivityDateTime</code> either must be null or must match the value of this field. If the activity is a task, <code>StartDateTime</code> is null
Status	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Sort Description Indicates the current status of a task. The default value of this field is <code>Not Started</code>. Each predefined status field sets a value for <code>IsClosed</code>. To obtain picklist values, query <code>TaskStatus</code>. Possible values are: - Completed - Deferred - In Progress - Not Started - Waiting on someone else
Subject	Type combobox Properties Filter, Nillable, Sort Description Contains the subject of the task or event.
WhatId	Type reference Properties Filter, Group, Nillable, Sort Description The <code>WhatId</code> represents nonhuman objects such as accounts, opportunities, campaigns, cases, or custom objects. <code>WhatIds</code> are polymorphic. Polymorphic means a <code>WhatId</code> is equivalent to the ID of a related object. The label is <code>Related To ID</code>. This is a polymorphic relationship field.

Field	Details
	Relationship Name What Relationship Type Lookup Refers To Account, Accreditation, AssessmentIndicatorDefinition, AssessmentTask, AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskOrder, Asset, AssetRelationship, AssignedResource, Award, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, Campaign, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis, CareInterventionType, CareMetricTarget, CareObservation, CareObservationComponent, CarePgmProvHealthcareProvider, CarePreauth, CarePreauthItem, CareProgram, CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee, CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider, CareProgramTeamMember, CareProviderAdverseAction, CareProviderFacilitySpecialty, CareProviderSearchableField, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareSpecialtyTaxonomy, CareTaxonomy, Case, CommSubscriptionConsent, ContactEncounter, ContactEncounterParticipant, ContactRequest, Contract, CoverageBenefit, CoverageBenefitItem, CreditMemo, DelegatedAccount, DocumentChecklistItem, EnrollmentEligibilityCriteria, HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, IdentityDocument, Image, IndividualApplication, Invoice, ListEmail, Location, MemberPlan, Opportunity, Order, OtherComponentTask, PartyConsent, PersonLifeEvent, PlanBenefit, PlanBenefitItem, ProcessException, Product2, ProductItem, ProductRequest, ProductRequestLineItem, ProductTransfer, PurchaserPlan, ReceivedDocument, ResourceAbsence, ReturnOrder, ReturnOrderLineItem, ServiceAppointment, ServiceResource, Shift, Shipment, ShipmentItem, Solution, Visit, VisitedParty, VolunteerProject, WorkOrder, WorkOrderLineItem
WhoId	Type reference Properties Filter, Group, Nillable, Sort Description The Whold represents a human such as a lead or a contact. Wholds are polymorphic. Polymorphic means a Whold is equivalent to a contact's ID or a lead's ID. The label is Name ID. If Shared Activities is enabled, the value of this field is the ID of the related lead or primary contact. If you add, update, or remove the Whold field, you might encounter problems with triggers, workflows, and data validation rules that are associated with the record. The label is Name ID.

Field	Details
	If your organization uses Shared Activities, when you query activities in API version 30.0 or later, the returned value of the <code>WhoId</code> field matches the value in the queried object, not necessarily in the activity record itself. If Shared Activities is enabled, the value of this field is not populated and the field <code>PrimaryWhoId</code> should be queried instead. This is a polymorphic relationship field. Relationship Name Who Relationship Type Lookup Refers To Contact, Lead

Usage

Query activities that are related to an object

1. Optionally, issue a describe call against the object whose activities you wish to query, to get a suggestion of the correct SOQL to use.
2. Issue a SOQL relationship query with a main clause that references the object, and an inner clause that references the activity history; for example:

```
SELECT
  (SELECT ActivityDate, Description
   FROM ActivityHistories)
FROM Account
WHERE Name Like 'XYZ%'
```

The user interface enforces sharing rules, filtering out related-list items that a user doesn't have permission to see.

The following constraints on users who don't have the "View All Data" permission help prevent performance issues.

- In the main clause of the relationship query, you can reference only one record. For example, you can't filter on all records where the account name starts with "A." Instead, you must reference a single account record.

```
SELECT
  (SELECT ActivityDate, Description
   FROM ActivityHistories
   ORDER BY ActivityDate DESC NULLS LAST, LastModifiedDate DESC
   LIMIT 500)
FROM Account
WHERE Name = 'Acme'
LIMIT 1
```

- In the inner clause of the query, you can't use `WHERE`.
- In the inner clause of the query, you must specify a limit of 500 or fewer on the number of rows that are returned in the list.

- In the inner clause of the query, you must sort on `ActivityDate` in descending order and `LastModifiedDate` in descending order. You can optionally display nulls last. For example: `ORDER BY ActivityDate DESC NULLS LAST, LastModifiedDate DESC`.

SEE ALSO:

[Task](#)

ActivityMetric

Represents activities that were added to Salesforce automatically by Einstein Activity Capture and manually by users.

This object is available in API version 45.0.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Unless otherwise noted, Einstein Activity Capture and Activity Metrics must be enabled.

Fields

Field	Details
<code>BaseId</code>	Type reference Properties Create, Defaulted on create, Filter, Group, idLookup, Sort Description The ID of the record that the activities apply to.
<code>BaseType</code>	Type string Properties Filter, Group, Nillable, Sort Description The entity that corresponds to the BaseId
<code>FirstCallDateTime</code>	Type dateTime Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description Indicates the date when the first call was made. This field is available only to Sales Engagement users. Einstein Activity Capture and Activity Metrics aren't required.
FirstEmailDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Indicates the date when the first email was sent. This field is available only to Sales Engagement users. Einstein Activity Capture and Activity Metrics aren't required.
InactiveDays	Type int Properties Filter, Group, Nillable, Sort Description Indicates the number of days since the most recent activity was completed. This field is derived from the Last Activity Date field.
LastActivityDateLastModDate	Type dateTime Properties Filter, Nillable, Sort Description Indicates when the LastActivityDateTime field was last modified.
LastActivityDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Indicates the date when the most recent activity was completed.
LastCallDateLastModDate	Type dateTime Properties Filter, Nillable, Sort Description Indicates when the LastCallDateTime field was last modified.

Field	Details
LastCallDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Indicates the date when the most recent call was made through Sales Dialer or Inbox.
LastEmailDateLastModDate	Type dateTime Properties Filter, Nillable, Sort Description Indicates when the LastEmailDateTime field was last modified.
LastEmailDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Indicates the date when the most recent email was sent or received.
LastEmailReceivedDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Indicates the date when the most recent email was received. Available in API version 54.0 and later.
LastEmailSentDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Indicates the date when the most recent email was sent. Available in API version 54.0 and later.
LastEventDateLastModDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description Indicates when the LastEventDateTime field was last modified.
LastEventDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Indicates the date when the most recent event was completed.
LastTaskDateLastModDate	Type dateTime Properties Filter, Nillable, Sort Description Indicates when the LastTaskDateTime field was last modified.
LastTaskDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Indicates the date when the last task was completed.
NextActivityDateLastModDate	Type dateTime Properties Filter, Nillable, Sort Description Indicates when the NextActivityDateTime field was last modified.
NextActivityDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Indicates the date of the next scheduled task or event. Only open tasks in the future are included.

Usage

Use this object to see data about sales activities that were added to Salesforce manually and by Einstein Activity Capture. Activity Metric fields are derived from your activity data. For example, the Inactive Days field indicates the number of days since the most recent activity was completed. Create a trigger that notifies a user when there isn't any activity on an account for a certain amount of time.

ActivityUsrConnectionStatus

Represents the status of the email connections for Einstein Activity Capture users. You can also see whether users accepted the required terms of service to capture emails. This object is available in API version 54.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, enable Einstein Activity Capture in your org.

Fields

Field	Details
ConfigurationName	Type string Properties Filter, Group, Nillable, Sort Description The name of the Einstein Activity Capture configuration that the user is assigned to.
ConnectivityStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The status of the user's email connection. Possible values are: • ACTIVE • DISABLED • INITIALIZING • NEEDSATENTION • NEEDSATENTIONGLOBAL (used when an org-level connection isn't working)

Field	Details
	- NEEDSATTEENTIONHYBRID (used when both org-level and user-level connections aren't working) - PENDING - PROCESSING
ContactsSynced	Type int Properties Filter, Group, Nillable, Sort Description The number of contacts synced after midnight between Salesforce and the user's Microsoft or Google email account. This field is available in API version 59.0 and later.
EmailAddress	Type string Properties Filter, Group, Nillable, Sort Description The email address that's used to capture and sync data between Salesforce and the user's Microsoft or Google account.
EventsSynced	Type int Properties Filter, Group, Nillable, Sort Description The number of events synced after midnight between Salesforce and the user's Microsoft or Google email account. This field is available in API version 59.0 and later.
ExternalId	Type string Properties Filter, Group, Nillable, Sort Description This field is reserved for future use.
GlobalOAuthTermsState	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description Indicates the user's terms of service status. When emails are enabled for Einstein Activity Capture, each user must accept the terms of service. Possible values are: • ACCEPTED • DECLINED • PENDING This field is available only if you use an org-level OAuth 2.0 or a service account authentication method. In connection report CSV files downloaded from Einstein Activity Capture Status & Metrics, this field is labeled Global Auth User Email Consent Status.
IsTermsOfServiceAccepted	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the user has accepted the Einstein Activity Capture terms of service or not. When emails are enabled for Einstein Activity Capture, each user must accept the terms of service. The default value is <code>false</code>. This field is available only if you use a user-level authentication method. In connection report CSV files downloaded from Einstein Activity Capture Status & Metrics, this field is labeled User Auth Terms of Service Accepted.
RecommendedActionDescription	Type string Properties Filter, Nillable, Sort Description Recommended action to take when the user's <code>ConnectivityStatus</code> is <code>NEEDSATENTION</code>. Available in API version 58.0 and later.
RecommendedActionTitle	Type string Properties Filter, Group, Nillable, Sort Description Reason for the user's <code>ConnectivityStatus</code> when the status is <code>NEEDSATENTION</code>. Available in API version 58.0 and later.
UserId	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description ID of the user.
UserName	Type string Properties Filter, Group, Nillable, Sort Description The username of the Einstein Activity Capture user.
UserOnboardingStatus	Type string Properties Filter, Group, Nillable, Sort Description The initial sync status when the user connects Salesforce with their external email account and syncs data for the first time. This field is available in API version 59.0 and later. Possible values are: • NOT_STARTED • IN_PROGRESS • NOT_CONFIGURED • COMPLETE • FAILED

AdditionalNumber

Represents an optional additional number for a call center. This additional number is visible in the call center's phone directory.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
CallCenterId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description System field that contains the ID of the user who created the call center associated with this additional number. If value is null, this additional number is displayed in every call center's phone directory.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the additional number, such as Conference Room B. Limit: 255 characters.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the additional number. Limit: 80 characters.
Phone	Type phone Properties Create, Filter, Nillable, Group, Sort, Update Description The phone number that corresponds to this additional number.

Usage

Create an additional number for a call center directory. Use this object if the number is not easily categorized as a User, Contact, Lead, Account, or the other object. Examples include phone queues or conference rooms.

Address

Represents a mailing, billing, or home address.

Supported Calls

```
create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()
```

Special Access Rules

The following access checks must be enabled:

- Industries Insurance
- Retail Execution
- Industries Visit
- Field Service
- Order Management
 - Perms: FulfillmentOrder, OrderSummary, AdvancedOrderManagement, OrderCCS
 - Prefs: OrdersEnabled, EnhancedCommerceOrders
- Public Sector
- Employee Experience
- Contact Tracing For Employees

You can create an address only when creating a location.

Fields

Field Name	Details
Address	Type address Properties Filter, Nillable Description The full address.
AddressType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Picklist of address types. The values are: • Mailing

Field Name	Details
	- Shipping - Billing - Home
City	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The address city.
Country	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The address country.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of the address.
DrivingDirections	Type string Properties Create, Filter, Nillable, Sort, Update Description Directions to the address.
GeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The level of accuracy of a location's geographical coordinates compared with its physical address. A geocoding service typically provides this value based on the address's latitude and longitude coordinates.

Field Name	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The most recent date on which a user referenced this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The most recent date on which a user viewed this record.
Latitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>Longitude</code> to specify the precise geolocation of the address. Acceptable values are numbers between -90 and 90 with up to 15 decimal places.
LocationType	Type picklist Properties Create, Defaulted on create, Filter, Filter, Group, Sort, Update Description Picklist of location types. The available values are: • Warehouse (default) • Site • Van • Plant
Longitude	Type double Properties Create, Filter, Nillable, Sort, Update

Field Name	Details
	Description Used with <code>Latitude</code> to specify the precise geolocation of the address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the address.
ParentId	Type reference Properties Create, Filter, Group, Sort Description A lookup field to the parent location. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To Location
PostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The address postal code.
State	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The address state.

Field Name	Details
Street	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The address street.
TimeZone	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Picklist of available time zones.

Usage

 **Important:** “Address” in Salesforce can also refer to the Address compound field found on many standard objects. When referencing the Address object in your Apex code, always use `Schema.Address` instead of `Address` to prevent confusion with the standard Address compound field. If referencing both the address object and the Address field in the same snippet, you can differentiate between the two by using `System.Address` for the field and `Schema.Address` for the object.

Associated Object

This object has the following associated object. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

AddressHistory (API version 62.0)

History is available for tracked fields of the object.

AgentWork

Represents a work assignment that’s been routed to an agent. If the work is transferred to another agent, a new AgentWork record is created. This object is available in API version 32.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.

Fields

Field	Details
AcceptDateTime	Typedatetime Properties Filter, Nillable, Sort Description Indicates when the work item was accepted.
ActiveTime	Type int Properties Filter, Group, Nillable, Sort Description The amount of time an agent is actively working on a work item in their console. Active time is tracked only for tasks routed using the tab-based capacity model. It's tracked only when the work tab is open and in focus in the console. If the agent switches console tabs, the time spent on the other tabs isn't counted. Active time continues to count if you switch to a new browser tab or window. Active time stops when the agent closes the work item or the after conversation work time ends, whichever happens first.
AcwExtensionCount	Type int Properties Filter, Group, Nillable, Sort Description The number of times that an agent extended the After Conversation Work (ACW) timer. This field is available in API version 55.0 and later.
AcwExtensionDuration	Type int Properties Filter, Group, Nillable, Sort Description The length of time (in seconds) that the After Conversation Work (ACW) timer was extended each time that the agent extended the timer. This field is available in API version 55.0 and later. To find the total extension duration, multiply this field by <code>AcwExtensionCount</code> or use <code>AfterConversationActualTime</code>.
AfterConversationActualTime	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The number of seconds an agent spent on After Conversation Work (ACW) after customer contact ended. This field is available in API version 52.0 and later.
AgentCapacityWhenDeclined	Type double Properties Filter, Nillable, Sort Description The agent's capacity when declining work, either explicitly or through push timeout.
AssignedDateTime	Type dateTime Properties Filter, Nillable, Sort Description Indicates when the work item was assigned to an agent
BotId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the Enhanced Einstein Bot or AI agent that performed the work. This is a relationship field. This field is available in API version 52.0 and later. Relationship Name Bot Relationship Type Lookup Refers To BotDefinition
BotType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the type of bot. Valid values are: • Bot. Refers to an Einstein bot.

Field	Details
	ExternalCopilot. Refers to an AI agent with whom your customers can interact. The default value is Bot. This field is available in API version 63.0 and later.
CancelDateTime	Type dateTime Properties Filter, Nillable, Sort Description Indicates when the work item was canceled.
CapacityModel	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the capacity model used to determine agent capacity. Valid values are <code>StatusBased</code> and <code>TabBased</code>. This field is available in API version 50.0 and later. A work item consumes agent capacity only if it was first assigned to the agent by Omni-Channel using queues or skills.
CapacityPercentage	Type percent Properties Create, Filter, Nillable, Sort Description The percentage of an agent's capacity that's consumed when this work item is in progress. Valid values are from 0 to 100. The agent can receive a new work item only if they have enough available capacity for the item. Voice calls must have a capacity percentage of <code>100</code>, so an agent on a call doesn't receive new work items until the call ends.
CapacityWeight	Type double Properties Create, Filter, Nillable, Sort Description The amount of an agent's capacity that's consumed when this work item is in progress. For example, if cases are assigned a capacity weight of <code>2</code>, an agent with a capacity of <code>6</code> can accept up to 3 cases before the agent is at capacity and can't receive new work items. Voice calls must use the entire capacity weight.

Field	Details
CloseDateTime	Type dateTime Properties Filter, Nillable, Sort Description Indicates when the work item was closed.
DeclineDateTime	Type dateTime Properties Filter, Nillable, Sort Description Date and time when the agent declined this record.
DeclineReason	Type string Properties Filter, Group, Nillable, Sort Description The provided reason for why an agent declined the work request.
ExternalBotId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the third-party bot that handles the work item. This is a relationship field. This field is available in API version 64.0 and later. Relationship Name ExternalBot Relationship Type Lookup Refers To ExternalConversationBotDef
HandleTime	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The amount of time an agent had the work item open, calculated by <code>CloseDateTime</code> – <code>AcceptedDateTime</code>. Handle time stops when the agent closes the work item or the after conversation work time ends, whichever happens first.
<code>IsConference</code>	Type boolean Properties Filter, Group, Sort Description Indicates whether the agent was conferenced on the work item by another agent (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>. Available in API version 44.0 and later. This field is accessible in Reports, but not via the API.
<code>IsInterruptible</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a work item consumes interruptible or primary capacity. The default value is <code>false</code>. Available in API version 57.0 and later when the Interruptible Capacity feature is enabled.
<code>IsOwnerChangeInitiated</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a work item owner change triggered the direct assignment of the work item to the agent. The default value is <code>false</code>. Status-Based Capacity Model has to be turned on to use this field. This field is available in API version 50.0 and later.
<code>IsPreferredUserRequired</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a work item stays with the preferred user even when the user isn't available. The default value is <code>false</code>. This field is available in API version 50.0 and later.
<code>IsStatusChangeInitiated</code>	Type boolean

Field	Details
	Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a work item status change triggered the direct assignment of the work item to the agent. The default value is false. Status-Based Capacity Model has to be turned on to use this field. This field is available in API version 50.0 and later.
IsTransfer	Type boolean Properties Filter, Group, Sort Description Indicates whether the agent received the work item through transfer from another agent (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>. Available in API version 38.0 and later. This field is accessible in Reports, but not via the API.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An automatically generated ID number that identifies the record.
OriginalGroupId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the queue that the work assignment was originally routed to. This field is a relationship field. Relationship Name OriginalGroup Relationship Type Lookup Refers To Group
OriginalQueueId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description The ID of the queue that the work assignment was originally routed to. Due to API changes, <code>OriginalQueueId</code> is no longer recommended. Use <code>OriginalGroupId</code> instead.
<code>OwnerId</code>	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of the AgentWork. This field is a polymorphic relationship field. This field is available in API version 50.0 and later. Relationship Name Owner Relationship Type Lookup Refers To Group, User
<code>PausedCapacityPercentage</code>	Type percent Properties Create, Filter, Nillable, Sort, Update Description The percentage of an agent's capacity that's consumed when this work item is paused. The paused capacity feature is available with status-based capacity and Enhanced Omni-Channel only. This field is available in API version 62.0 and later.
<code>PausedCapacityWeight</code>	Type double Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description The amount of an agent's capacity that's consumed when this work item is paused. The paused capacity feature is available with status-based capacity and Enhanced Omni-Channel only. This field is available in API version 62.0 and later.
<code>PendingServiceRoutingId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort

Field	Details
	Description The ID of the PendingServiceRouting on page 4109 from which the AgentWork was created. This field is a relationship field. This field is available in API version 50.0 and later. Relationship Name PendingServiceRouting Relationship Type Lookup Refers To PendingServiceRouting
PreferredUserId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the preferred user to handle the work. This field is a relationship field. This field is available in API v46.0 and later. Relationship Name PreferredUser Relationship Type Lookup Refers To User
PushTimeout	Type int Properties Filter, Group, Nillable, Sort Description The time limit set for an agent to respond to an item before it's pushed to another agent. The time limit is measured in seconds. This field is available in API version 36.0 and later. Effective API version 57.0, for inbound Voice calls, this field represents the time limit set for an agent to respond to a call before it's declined. The value must be between 0 and 20. The value is capped at 20, so any number greater than that is treated as 20 seconds. This applies to the following telephony models: • Service Cloud Voice with Amazon Connect • Service Cloud Voice with Partner Telephony from Amazon Connect
PushTimeoutDateTime	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The date and time (in UTC) when the push timeout event occurred. This field is available in API version 36.0 and later.
RequestDateTime	Type dateTime Properties Filter, Nillable, Sort Description Indicates when the work was requested.
RoutingModel	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Determines how incoming work items are routed to agents assigned to a service channel. Possible values are: • ExternalRouting • LeastActive • MostAvailable
RoutingPriority	Type int Properties Filter, Group, Nillable, Sort Description The order in which work items from the queue that are associated with the routing configuration are routed to agents.
RoutingType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of Omni-Channel routing. Possible values are: • QueueBased • SkillsBased

Field	Details
SecondaryRoutingPriority	Type int Properties Filter, Group, Nillable, Sort Description Indicates the secondary routing priority.
ServiceChannelId	Type reference Properties Create, Filter, Group, Sort Description The ID of the service channel that's associated with the work assignment. This field is a relationship field. Relationship Name ServiceChannel Relationship Type Lookup Refers To ServiceChannel
ShouldSkipCapacityCheck	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether to skip checking an agent's available capacity (<code>true</code>) or not (<code>false</code>) when an externally routed work item is created. This field is used when agents can simultaneously handle work from both Omni-Channel queues and queues using external routing. When <code>true</code>, the receiving agent can exceed their set capacity to accept the item, but they don't receive more Omni-Channel routed work. When <code>false</code>, the receiving agent can't exceed their set capacity and must have enough open capacity to accept the item. The default value is <code>false</code>.
SpeedToAnswer	Type int Properties Filter, Group, Nillable, Sort Description The amount of time between when the work was requested and when an agent accepted it.

Field	Details
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The working status of the work item. Valid values are: • Assigned – The item is assigned to the agent but hasn't been opened. • Canceled – The item no longer needs to be routed. For example: a chat visitor cancels their Omni-Channel routed chat request before it reaches an agent. • Closed – The item is closed. • Declined – The item was assigned to the agent but the agent explicitly declined it. • DeclinedOnPushTimeout – The item was declined because push time-out is enabled and the item request timed out with the agent. • Opened – The agent opened the item. • Transferred – The item was transferred from an agent to another agent, queue, or skill. • Unavailable – The item was assigned to the agent but the agent became unavailable (went offline or lost connection).
TargetAcceptDateTime	Type dateTime Properties Filter, Nillable, Sort, Update Description The date and time by when a rep must accept a work item. Influences backlog ordering by prioritizing work items with earlier target acceptance deadlines. The field can be dynamically set using Flow for each work item during the routing process. This allows for flexible prioritization based on case urgency, customer tier, or other business rules. Available in API version 65.0 and later.
TransferRequesterId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The user ID of the rep who reassigned the work using the Reassign action. This field is populated in reassigned AgentWork records only, not the original AgentWork record. This is a relationship field. This field is available in API version 63.0 and later. Relationship Name TransferRequester Relationship Type Lookup

Field	Details
	Refers To User
UserId	Type reference Properties Create, Filter, Group, Sort Description The ID of the user that the work item was assigned to. This field is a relationship field. Relationship Name User Relationship Type Lookup Refers To User
WorkItemId	Type reference Properties Create, Filter, Group, Sort Description The ID of the object that's routed to the agent through Omni-Channel. This field is a polymorphic relationship field. Relationship Name WorkItem Relationship Type Lookup Refers To Custom objects and these standard objects: Account, Activity, Case, Claim, ClaimCoverage, ClaimRecovery, Contact, ContactRequest, CustomEntityData, Incident, Lead, LiveChatTranscript, MessagingSession, Opportunity, Orchestration Work Items, Order, PaymentRequest, PersonTraining,Referral, SocialPost, SwarmMember, and VoiceCall. WorkOrder is available in version 58.0 and later.

Usage

AgentWork records can only be deleted if they have the status Closed, Declined, or Unavailable. They can't be deleted if their status is Assigned or Opened because they're active in Omni-Channel.

When AgentWork records are created, they have the status Assigned. After a record is created, it's automatically pushed to the assigned agent.

While the metadata for `AgentWork` indicates support for `upsert()` and `update()`, these calls aren't used with `AgentWork` because none of its fields can be updated.

Apex triggers are supported with `AgentWork`.

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

AgentWorkChangeEvent (API version 63.0)

Change events are available for the object.

AgentWorkOwnerSharingRule

Sharing rules are available for the object.

AgentWorkShare

Sharing is available for the object.

SEE ALSO:

[Salesforce Help: Understand the Details of the Routing Lifecycle](#)

AgentWorkConversationalData

Stores conversation data for agent work sessions, such as agent interactions, transfer information, and operational metrics. This object is available in API version 66.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

You must have the Agentforce Contact Center Admin (Salesforce Voice) permission set enabled in your org.

Fields

Field	Details
AgentChannelRecordingId	Type reference Properties Filter, Group, Nillable, Sort Description Identifier for the recording associated with the agent channel conversation. This field is a relationship field. Relationship Name AgentChannelRecording

Field	Details
	Refers To VoiceCallRecording
AgentConnectDateTime	Type dateTime Properties Filter, Nillable, Sort Description Timestamp for when the agent connected to the conversation.
AgentCustomerMergeTime	Type dateTime Properties Filter, Nillable, Sort Description Timestamp when the service rep and customer conversations are merged after consultation.
AgentDisconnectDateTime	Type dateTime Properties Filter, Nillable, Sort Description Timestamp for when the agent disconnected from the conversation.
AgentId	Type reference Properties Filter, Group, Nillable, Sort Description ID of an agent or a rep involved in the conversation. This field is a polymorphic relationship field. Relationship Name Agent Refers To BotDefinition, ExternalConversationBotDef, User
AgentType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description Type of agent handling the conversation. Possible values are: • ExternalBot • Human • InternalBot
AgentWorkId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the <code>AgentWork</code> record associated with the conversational data. This field is a relationship field. Relationship Name AgentWork Refers To AgentWork
ChannelSessionRecordId	Type reference Properties Filter, Group, Nillable, Sort Description Identifier of the channel session for the conversation. This field is a relationship field. Relationship Name ChannelSessionRecord Refers To VoiceCall
LongestPauseDuration	Type int Properties Filter, Group, Nillable, Sort Description Duration of the longest pause during the conversation, measured in seconds.
Name	Type string

Field	Details
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the agent work conversational data record.
NextAgentWorkConvId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the next record in a sequence of conversations. This field is a relationship field. Relationship Name NextAgentWorkConv Refers To AgentWorkConversationalData
OwnerId	Type reference Properties Filter, Group, Sort Description ID of the owner of the conversational data record. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
OwnershipEndDateTime	Type dateTime Properties Filter, Nillable, Sort Description Timestamp for when ownership of the conversation ended.
OwnershipStartDateTime	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description Timestamp for when ownership of this conversation started.
PauseCount	Type int Properties Filter, Group, Nillable, Sort Description Total number of times the conversation was paused.
PrevAgentWorkConvId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the previous record in a sequence of conversations. This field is a relationship field. Relationship Name PrevAgentWorkConv Refers To AgentWorkConversationalData
QualityScore	Type double Properties Filter, Nillable, Sort Description Value of the Mean Opinion Score (MOS) that measures voice call quality.
TotalPauseDuration	Type int Properties Filter, Group, Nillable, Sort Description Total duration of all pauses during the conversation, measured in seconds.
TransferType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description Type of transfer for the conversation. Possible values are: • Cold • Warm

AgentWorkSkill

Represents a skill used to route a work assignment to an agent. AgentWorkSkill is used for reporting and represents the result of a routing decision. This object is available in API version 42.0 and later.

Supported Calls

`delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.

Fields

Field	Details
AgentWorkId	Type reference Properties Filter, Group, Sort Description The AgentWork object associated with this skill.
IsAdditionalSkill	Type boolean Properties Defaulted on create, Filter, Group, Sort Description After a designated timeout period, a skill marked as additional is dropped from Omni-Channel routing. The case is then routed to the best-matched agent, even if the agent doesn't have all the skills. The default value is false. Available in API version 48.0 and later.

Field	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An automatically generated ID number that identifies the record.
SkillId	Type reference Properties Filter, Group, Sort Description The skill that is required or additional.
SkillLevel	Type double Properties Filter, Sort Description The level of the required or additional skill. Skill levels can range from 1 to 10. Depending on your business needs, you might want the skill level to reflect years of experience, certification levels, or license classes.
SkillPriority	Type int Properties Aggregatable, Filter, Group, Nillable, Sort Description For additional skills, specifies the order in which skills are dropped if after the specified timeout no agent with that skill is available. Higher priority-value skills are dropped first. Lower priority-value skills, for example 0, are dropped last. Skills with the same priority value are dropped as a group. You can set skill priority using attribute setup for skills-based routing or Apex code.
WasDropped	Type boolean Properties Filter, Group, Sort Description For skills marked as additional, indicates if the skill was dropped from Omni-Channel routing because an agent with this skill was not available. The default value is false. Available in API version 48.0 and later.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AgentWorkSkillChangeEvent](#) (API version 62.0)

Change events are available for the object.

AIApplication

Represents an AI application such as Einstein Prediction Builder. This object is available in API version 50.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
DeveloperName	Type string Properties Filter, Group, Sort Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language of the application. Possible values are: • da—Danish • de—German • en_US—English • es—Spanish

Field	Details
	• <code>es_MX</code>—Spanish (Mexico) • <code>fi</code>—Finnish • <code>fr</code>—French • <code>it</code>—Italian • <code>ja</code>—Japanese • <code>ko</code>—Korean • <code>nl_NL</code>—Dutch • <code>no</code>—Norwegian • <code>pt_BR</code>—Portuguese (Brazil) • <code>ru</code>—Russian • <code>sv</code>—Swedish • <code>th</code>—Thai • <code>zh_CN</code>—Chinese (Simplified) • <code>zh_TW</code>—Chinese (Traditional)
MasterLabel	Type string Properties Filter, Group, Sort Description Label that identifies the AI application throughout the Salesforce user interface.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description Specifies the namespace of the application if installed with a managed package.
Status	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Status of the AI application. Possible values are: • Disabled • Enabled • Migrated

Field	Details
Type	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of application. Possible values are: PredictionBuilder

AIApplicationConfig

Additional prediction information related to an AI application. This object is available in API version 50.0 and later.

Supported Calls

`delete()`, `describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
DeveloperName	Type string Properties Filter, Group, Sort Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language of the application. Possible values are:

Field	Details
	• da—Danish • de—German • en_US—English • es—Spanish • es_MX—Spanish (Mexico) • fi—Finnish • fr—French • it—Italian • ja—Japanese • ko—Korean • nl_NL—Dutch • no—Norwegian • pt_BR—Portuguese (Brazil) • ru—Russian • sv—Swedish • th—Thai • zh_CN—Chinese (Simplified) • zh_TW—Chinese (Traditional)
MasterLabel	Type string Properties Filter, Group, Sort Description Label that identifies the AI application throughout the Salesforce user interface.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description Specifies the namespace of the application config, if installed with a managed package.

AiGenActionItem

Represents business actions suggested by generative AI. AI-generated action items are sent to either agents for automatic execution or human users for review, depending on org preference and if there are any errors in the process. This object is available in API version 64.0 and later.

Supported Calls

`delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`

Special Access Rules

Agentforce Pipeline Management must be enabled. Only the agent user can create AiGenActionItem records.

Fields

Field	Details
ActionItemOwnerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID associated with the owner of the AI-generated action item. The owner can be an agent or human user, and can change during the review and execution process. By default, the owner is an agent or queue. This field is a polymorphic relationship field. Relationship Name ActionItemOwner Refers To Group, User
ActionResult	Type textarea Properties Create, Nillable, Update Description The result generated when the agent action is executed.
AgentType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The specific agent that processes the AI-generated action item.
BotDefinitionId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The bot record with a template name that matches the value in the Sales Management agent template. This field is a relationship field. Relationship Name BotDefinition Refers To BotDefinition
BotVersionId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The bot version from the bot record with an ID that matches the ID of the Sales Management agent bot record. This field is a relationship field. Relationship Name BotVersion Refers To BotVersion
Description	Type string Properties Create, Filter, Nillable, Sort, Update Description The explanation of why the action item has been suggested. The description provides additional context to guide human users and agents in their decision-making.
ExpirationDate	Type dateTime Properties Create, Filter, Sort, Update Description The date that the action item expires and is deleted. AI-generated action items are no longer visible to users after 14 days and removed from records after 30 days.

Field	Details
GeneratedResponseIdRef	Type string Properties Filter, Group, Nillable, Sort Description The ID of generated result in the GenAIGeneration DMO. This field can be used by human users to provide feedback on the AI-generated action item.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of this object. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The status of the AI-generated action item.
Subject	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The subject line that displays to users indicating what the action item is.
Type	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The category that the action item falls under. This field can be used to search for specific action items, such as field updates or follow-up sales emails.

Field	Details
UnmodActionItemOutput	Type textarea Properties Nillable Description The unmodified output for the action item produced by AI, whether from a prompt template or other generation method.
WhatId	Type reference Properties Create, Filter, Group, Sort, Update Description The record that the AI-generated action item is for. This field is a polymorphic relationship field. Relationship Name What Refers To Account, Opportunity

AllInsightAction

Represents an Einstein prediction insight action. This object is available in API version 47.0 and later.

An Einstein insight is created every time an Einstein feature, such as Prediction Builder, makes a prediction. An insight is represented by a root `AIRecordInsight` and the following child objects: `AllInsightAction`, `AllInsightFeedback`, `AllInsightReason`, and `AllInsightValue`.

`AllInsightAction` is a one-to-many child of `AIRecordInsight`. `AllInsightAction` contains information about predicted actions for this particular insight. `AllInsightAction` has one or more `AllInsightValue` children which contain predicted values for the action. For example, an `AllInsightAction` could represent a quick action, and have a child `AllInsightValue` with the recommended value used by the quick action.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Prediction insight objects are only available in orgs that have Einstein features, such as Prediction Builder or Case Classification, enabled.

Fields

Field	Details
ActionId	Type reference Properties Filter, Group, Nillable, Sort Description The unique ID of the associated action, such as the ID of a Macro. This is a polymorphic relationship field. Relationship Name Action Relationship Type Lookup Refers To ApexClass, AuraDefinitionBundle
ActionName	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The ID of the action. For example, a value of "Case.SendEmail" indicates a send email quick action on Case.
AiRecordInsightId	Type reference Properties Filter, Group, Sort Description The unique ID of the associated AiRecordInsight. This is a relationship field. Relationship Name AiRecordInsight Relationship Type Lookup Refers To AiRecordInsight
Confidence	Type double

Field	Details
	Properties Filter, Nillable, Sort
	Description Relative confidence strength of the generated prediction insight. Higher values (near 1.0) indicate stronger confidence.
Name	Type string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description The name of the AllInsightAction.
Type	Type picklist
	Properties Filter, Group, Restricted picklist, Sort
	Description The type of action. Possible values are: • <code>InvokableAction</code>—Invocable Action • <code>Macro</code>—Macro • <code>QuickAction</code>—Quick action. • <code>StandardAction</code>—Standard Action. An example standard action would be to update a record.

Usage

When an Einstein feature makes a prediction and saves the results, the following events happen in a single atomic operation:

- An `AIRecordInsight` record is created and populated with information about the prediction insight. `AllInsightAction`, `AllInsightReason`, and `AllInsightValue` records are also created and made children of the `AIRecordInsight` record.
- If the Einstein feature uses AI prediction fields, prediction result values are written to the target AI prediction field.
- An `AIPredictionEvent` platform event is created, and any subscriber to `AIPredictionEvent` is notified.

When Einstein writes prediction results back to AI prediction fields, record save custom logic, such as Apex triggers, workflow rules, and assignment rules, aren't run. To add custom logic based on Einstein prediction results, use a platform event subscriber, such as Process Builder, to get notifications for `AIPredictionEvents` that contain references to Einstein insight objects.

Custom fields can't be added to Einstein insight objects.

Einstein insights contain information about target fields and predicted value. Your org may have created Einstein predictions that are associated with target fields with field-level security restrictions. To control how users access Einstein insights records, use Salesforce data access features such as user profiles and permission sets.

AllInsightFeedback

Represents an Einstein prediction insight feedback. This object is available in API version 47.0 and later.

An Einstein insight is created every time an Einstein feature, such as Prediction Builder, makes a prediction. An insight is represented by a root `AIRecordInsight` and the following child objects: `AllInsightAction`, `AllInsightFeedback`, `AllInsightReason`, and `AllInsightValue`.

`AllInsightFeedback` is a one-to-many child of `AIRecordInsight`. `AllInsightFeedback` contains information about explicit and implicit feedback collected from users for a particular insight.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Prediction insight objects are only available in orgs that have Einstein features, such as Prediction Builder or Case Classification, enabled.

Fields

Field	Details
<code>ActualValue</code>	Type string Properties Filter, Group, Nillable, Sort Description The raw feedback value. This field is null when no recommendation is selected.
<code>AIFeedback</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The feedback user sentiment. Possible values are: • <code>Negative</code>—Negative feedback • <code>Neutral</code>—Neutral feedback • <code>Positive</code>—Positive feedback
<code>AIInsightFeedbackType</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The nature of the feedback. Possible values are:

Field	Details
	• Explicit—Explicit feedback. For example, a user applies and saves an Einstein recommendation on a case. • Implicit—Implicit feedback. For example, a user edits or updates a case field without viewing or applying field recommendations from Einstein.
AiRecordInsightId	Type reference Properties Filter, Group, Sort Description The unique ID of the associated AIRecordInsight. This is a relationship field. Relationship Name AIRecordInsight Relationship Type Lookup Refers To AIRecordInsight
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the AllInsightFeedback.
Rank	Type int Properties Filter, Group, Nillable, Sort Description The feedback score.
ValueId	Type reference Properties Filter, Group, Nillable, Sort Description The unique ID of the associated AllInsightValue. This is a polymorphic relationship field.

Field	Details
	Relationship Name Value
	Relationship Type Lookup
	Refers To AllInsightAction, AllInsightValue

Usage

Salesforce creates AllInsightFeedback records based on user responses to predictions after the prediction has been created. User feedback, such as a thumbs up/down response or accepting a recommended value, results in the creation of a feedback record in which the feedback type is explicit. An implicit feedback record is created when Einstein makes a recommendation but the field is updated in another way, for example, by a process. Once the AllInsightFeedback record has been created, it's immutable.

Custom fields can't be added to Einstein insight objects.

AllInsightReason

Represents an Einstein prediction insight reason. This object is available in API version 47.0 and later.

An Einstein insight is created every time an Einstein feature, such as Prediction Builder, makes a prediction. An insight is represented by a root AIRecordInsight and the following child objects: AllInsightAction, AllInsightFeedback, AllInsightReason, and AllInsightValue.

AllInsightReason is a one-to-many child of AllInsightValue. AllInsightReason contains details about how Einstein predicted an insight value.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Prediction insight objects are only available in orgs that have Einstein features, such as Prediction Builder or Case Classification, enabled.

Fields

Field	Details
AiInsightValueId	Type reference
	Properties Filter, Group, Sort
	Description The unique ID of the associated AllInsightValue.

Field	Details
	This is a relationship field. Relationship Name AllInsightValue Relationship Type Lookup Refers To AllInsightValue
Contribution	Type double Properties Filter, Nillable, Sort Description The contribution weight for this insight reason.
FeatureType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of the feature, such as BOOL.
FeatureValue	Type string Properties Filter, Group, Nillable, Sort Description The value of the feature, such as TRUE or FALSE.
FieldName	Type string Properties Filter, Group, Nillable, Sort Description The name of the field the insight uses for its evaluation.
FieldValue	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The value for the field the insight uses for its evaluation.
Intensity	Type double Properties Filter, Nillable, Sort Description The intensity weight for this insight reason.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the AllInsightReason.
Operator	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The logical operator the insight uses to compare the field value with the expression value. For example, if the prediction evaluates whether the fieldValue for the field <code>bonus__c</code> is greater than \$5,000, the logical operator is <code>greater than</code> .
ReasonLabelKey (Beta)	Type string Properties Filter, Group, Nillable, Sort Description The key used to map an Einstein Key Accounts Identification (Beta) insight phrase or phrases to the correct messaging template.
RelatedInsightReasonId (Beta)	Type reference Properties Filter, Group, Nillable, Sort Description The ID used to relate multiple insights to a single model reason in the Einstein Key Accounts Identification (Beta) feature. This is a relationship field.

Field	Details
	Relationship Name RelatedInsightReason Relationship Type Lookup Refers To AllInsightReason
SortOrder (Beta)	Type int Properties Filter, Group, Nillable, Sort Description A number value used to organize the phrases in the model's insights message in the Einstein Key Accounts Identification (Beta) feature.
Variance	Type double Properties Filter, Nillable, Sort Description The variance weight for this insight reason.

Usage

When an Einstein feature makes a prediction and saves the results, the following events happen in a single atomic operation:

- An AIRecordInsight record is created and populated with information about the prediction insight. AllInsightAction, AllInsightReason, and AllInsightValue records are also created and made children of the AIRecordInsight record.
- If the Einstein feature uses AI prediction fields, prediction result values are written to the target AI prediction field.
- An AIPredictionEvent platform event is created, and any subscriber to AIPredictionEvent is notified.

When Einstein writes prediction results back to AI prediction fields, record save custom logic, such as Apex triggers, workflow rules, and assignment rules, aren't run. To add custom logic based on Einstein prediction results, use a platform event subscriber, such as Process Builder, to get notifications for AIPredictionEvents that contain references to Einstein insight objects.

Custom fields can't be added to Einstein insight objects.

Einstein insights contain information about target fields and predicted value. Your org may have created Einstein predictions that are associated with target fields with field-level security restrictions. To control how users access Einstein insights records, use Salesforce data access features such as user profiles and permission sets.

AllInsightValue

Represents an Einstein prediction insight value. This object is available in API version 47.0 and later.

An Einstein insight is created every time an Einstein feature, such as Prediction Builder, makes a prediction. An insight is represented by a root AIRecordInsight and the following child objects: AllInsightAction, AllInsightFeedback, AllInsightReason, and AllInsightValue.

AllInsightValue is a one-to-many child of AIRecordInsight. AllInsightValue represents a predicted value of a predicted insight.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Available when Einstein features such as Prediction Builder or Case Classification are enabled. To access an AllInsightValue record, you must have access to the related AIRecordInsight record. To grant a user the right to create an AllInsightValue record, you can use the AICreateInsightObjects or the CreateAllInsights permission.

Fields

Field	Details
AiInsightActionId	Type reference Properties Filter, Group, Nillable, Sort Description The unique ID of the associated AllInsightAction. This is a relationship field. Relationship Name AiInsightAction Relationship Type Lookup Refers To AllInsightAction
AiRecordInsightId	Type reference Properties Filter, Group, Sort Description The unique ID of the associated AIRecordInsight. This is a relationship field. Relationship Name AiRecordInsight Relationship Type Lookup

Field	Details
	Refers To AIRecordInsight
Confidence	Type double Properties Filter, Nillable, Sort Description Relative confidence strength of the generated prediction insight. Higher values (near 1.0) indicate stronger confidence.
Field	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The name of the target field Einstein is making predictions for, such as "AnnualRevenue".
FieldValueLowerBound	Type textarea Properties Nillable Description The lower bound value.
FieldValueUpperBound	Type textarea Properties Nillable Description The upper bound value.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the AllInsightValue.
SubjectLookupValueId	Type reference

Field**Details****Properties**

Filter, Group, Nillable, Sort

Description

The unique ID of the value object, if this insight value references an object.

This is a relationship field.

Relationship Name

SubjectLookupValue

Relationship Type

Lookup

Refers To

Account, Accreditation, ActivationTarget, Address, AlternativePaymentMethod, ApiAnomalyEventStore, AssessmentIndicatorDefinition, AssessmentTask, AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskIndDefinition, AssessmentTaskOrder, Asset, AssetRelationship, AssignedResource, AssociatedLocation, AuthorizationForm, AuthorizationFormConsent, AuthorizationFormDataUse, AuthorizationFormText, Award, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, Campaign, CampaignMember, CardPaymentMethod, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis, CareInterventionType, CareMetricTarget, CareObservation, CareObservationComponent, CarePgmProvHealthcareProvider, CarePreauth, CarePreauthItem, CareProgram, CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee, CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider, CareProgramTeamMember, CareProviderAdverseAction, CareProviderFacilitySpecialty, CareProviderSearchableField, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareSpecialtyTaxonomy, CareTaxonomy, Case, CodeSet, CodeSetBundle, CommSubscription, CommSubscriptionChannelType, CommSubscriptionConsent, CommSubscriptionTiming, ConsumptionRate, ConsumptionSchedule, Contact, ContactEncounter, ContactEncounterParticipant, ContactPointAddress, ContactPointConsent, ContactPointEmail, ContactPointPhone, ContactPointTypeConsent, ContactRequest, ContentVersion, Contract, CoverageBenefit, CoverageBenefitItem, CredentialStuffingEventStore, CreditMemo, CreditMemoLine, DataUseLegalBasis, DataUsePurpose, DelegatedAccount, DigitalWallet, DocumentChecklistItem, DuplicateRecordItem, DuplicateRecordSet, EmailMessage, EngagementChannelType, EnrollmentEligibilityCriteria, Event, HealthCareDiagnosis, HealthCareProcedure, HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, Idea, Identifier, IdentityDocument, Image, Individual, IndividualApplication, Invoice, InvoiceLine, Lead, Location, LocationTrustMeasure, MemberPlan, MessagingEndUser, OperatingHours, Opportunity, OpportunityContactRole, OpportunityLineItem, Order, OrderItem, OtherComponentTask, PartyConsent, Payment, PaymentAuthAdjustment, PaymentAuthorization, PaymentGateway, PaymentGroup, PaymentLineInvoice, PersonEducation, PersonLanguage, PersonLifeEvent, PersonName, PlanBenefit, PlanBenefitItem, Pricebook2, PricebookEntry, ProcessException, Product2, ProductConsumptionSchedule, ProductFulfillmentLocation, ProductItem,

Field	Details
	ProductItemTransaction, ProductRequest, ProductRequestLineItem, ProductRequired, ProductTransfer, ProfileSkill, ProfileSkillEndorsement, ProfileSkillUser, PurchaserPlan, PurchaserPlanAssn, QuickText, ReceivedDocument, Recommendation, Refund, RefundLinePayment, ReportAnomalyEventStore, ResourceAbsence, ResourcePreference, ReturnOrder, ReturnOrderItemAdjustment, ReturnOrderItemTax, ReturnOrderLineItem, ServiceAppointment, ServiceResource, ServiceResourceSkill, ServiceTerritory, ServiceTerritoryMember, ServiceTerritoryWorkType, SessionHijackingEventStore, SharingRecordCollection, Shift, Shipment, ShipmentItem, SkillRequirement, SocialPersona, SocialPost, Solution, Task, TimeSlot, UnitOfMeasure, UserProvisioningRequest, VideoCall, Visit, VisitedParty, Visitor, VoiceCall, VolunteerProject, WorkBadge, WorkBadgeDefinition, WorkOrder, WorkOrderLineItem, WorkThanks, WorkType, WorkTypeGroup, WorkTypeGroupMember
SubjectType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of the value object, such as Account or Case, if this insight value references an object.
Value	Type textarea Properties Nillable Description The prediction result insight value.
ValueType	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The data type of the prediction result insight value. Possible values are: • Boolean—Boolean • Currency—Currency • DateTime—DateTime • Enum—Enum • Lookup—Lookup • Number—Number • String—String

Usage

When an Einstein feature makes a prediction and saves the results, the following events happen in a single atomic operation:

- An `AIRecordInsight` record is created and populated with information about the prediction insight. `AllInsightAction`, `AllInsightReason`, and `AllInsightValue` records are also created and made children of the `AIRecordInsight` record.
- If the Einstein feature uses AI prediction fields, prediction result values are written to the target AI prediction field.
- An `AIPredictionEvent` platform event is created, and any subscriber to `AIPredictionEvent` is notified.

When Einstein writes prediction results back to AI prediction fields, record save custom logic, such as Apex triggers, workflow rules, and assignment rules, aren't run. To add custom logic based on Einstein prediction results, use a platform event subscriber, such as Process Builder, to get notifications for `AIPredictionEvents` that contain references to Einstein insight objects.

Custom fields can't be added to Einstein insight objects.

Einstein insights contain information about target fields and predicted value. Your org may have created Einstein predictions that are associated with target fields with field-level security restrictions. To control how users access Einstein insights records, use Salesforce data access features such as user profiles and permission sets.

AiJobRun

Represents an execution instance of an AI job. This object tracks the overall status and manages the lifecycle of the job from initiation to completion. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
<code>EndTime</code>	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The time when the job run ends.
<code>ErrorCode</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description If the job run fails, this field indicates the specific error that occurred.

Field	Details
ErrorMessage	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Contains a detailed, human-readable message that explains the reason for the job run failure.
JobType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Defines the job's logic. Possible values are: • PromptTemplate
Label	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A user-defined name or label for the job run, which can be used for identification and tracking.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description A unique, system-generated identifier for the <code>AiJobRun</code> record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The user group that owns the <code>AiJobRun</code> record. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User

Field	Details
StartTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The time when the job run's status changes to <code>InProgress</code>.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Tracks the lifecycle of the job run. Valid values are: • <code>New</code>: The job run has been created. • <code>ReadyToStart</code>: The job run is ready for the user to initiate processing. • <code>Queued</code>: The job run is queued to start. • <code>InProgress</code>: The job run is currently processing. • <code>Completed</code>: The job run completed. • <code>Failed</code>: The job run failed. • <code>Aborted</code>: The job run was aborted by the user. • <code>Archived</code>: The job run was archived by the user.
Target	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A metadata field used to specify job-specific details, such as a <code>PromptTemplateId</code>, <code>PromptTemplateName</code>, or <code>ModelId</code>. This provides further context for the job execution.

AiJobRunItem

Stores an individual item associated with a parent `AiJobRun`, including the inputs and resulting response. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AiJobRunId	Type reference Properties Create, Filter, Group, Sort, Update Description A required reference to the parent AiJobRun record that this item belongs to. This field is a relationship field. Relationship Name AiJobRun Refers To AiJobRun
ErrorCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description If processing for this item fails, this field contains a numeric code indicating the error.
ErrorMessage	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Contains a detailed, human-readable message that explains the reason for the job run item failure.
Input	Type textarea Properties Create, Update Description Contains the input data for a single item within the job run. For example, in a PromptTemplate job, this is the JSON input for the prompt template.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort

Field	Details
	Description A unique, system-generated identifier for the AiJobRunItem record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The user or group that owns the AiJobRunItem record. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
PreprocessedInput	Type textarea Properties Create, Nillable, Update Description Stores an intermediate version of the input data after the preprocessing step. For example, this field could be a hydrated JSON prompt.
Response	Type textarea Properties Create, Nillable, Update Description Contains the generated response for the job item after processing is complete.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Tracks the status of the individual job item. Valid values are: • Ready: The default value. The job run item is ready to start processing. • Completed: Processing for the job run item is complete. • Failed: Processing for the job run item failed.

AiModelLanguage

An object that stores language related information that is generated for each AI model. This object is available in API version 55.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Special Access Rules

For Einstein Reply Recommendations:

Requires the Einstein Reply Recommendations org permissions, Einstein Reply Recommendations org pref, and Admin user or user with Einstein Reply Manager permissions.

Fields

Field	Details
ApplicationType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Type of application using the AI model. Possible values are: • ARTICLE_RECOMMENDATION • EAR_FOR_CONVERSATION • EAR_FOR_VOICE • FAQ • REPLY_RECOMMENDATION • USE_CASE_EXPLORER • UTTERANCE_RECOMMENDATION
ExternalAiModelId	Type reference Properties Filter, Group, Sort Description ID of the AI model used to generate predictions. This field is a relationship field.

Field	Details
	Relationship Name ExternalAiModel Relationship Type Lookup Refers To ExternalAiModel
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Languages supported by this AI model. Possible values are: • Arabic • Chinese-simplified • Chinese-traditional • Dutch • English • French • German • Italian • Japanese • Korean • Polish • Portuguese • Russian • Spanish • Thai • Turkish
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description AI model name.
ServingStatus	Type picklist

Field	Details
	Properties Filter, Group, Restricted picklist, Sort, Update Description Determines if the language is enabled or disabled for this AI model.
TranscriptCount	Type int Properties Filter, Group, Sort Description Transcript count detected for each language.

AIRecordInsight

Represents an Einstein prediction insight. This object is available in API version 47.0 and later.

An Einstein insight is created every time an Einstein feature, such as Prediction Builder, makes a prediction. An insight is represented by a root AIRecordInsight and the following child objects: AllInsightAction, AllInsightFeedback, AllInsightReason, and AllInsightValue.

AIRecordInsight contains information on the Einstein prediction, the AI prediction field where results were written, and other details such as the type of prediction.

Supported Calls

`delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`

Special Access Rules

Prediction insight objects are available in orgs that have Einstein features, such as Prediction Builder or Case Classification, enabled.

Fields

Field	Details
AiApplicationId	Type reference Properties Filter, Group, Nillable, Sort Description The unique ID of the AiApplication that generated this prediction. This is a relationship field.

Field	Details
	Relationship Name AiApplication Relationship Type Lookup Refers To AIApplication
Confidence	Type double Properties Filter, Nillable, Sort Description Relative confidence strength of the generated prediction insight, from 0.0 to 1.0. Higher values (near 1.0) indicate stronger confidence.
MLPredictionDefinitionId	Type reference Properties Filter, Group, Nillable, Sort Description This field is a relationship field. Relationship Name MLPredictionDefinition Relationship Type Lookup Refers To MLPredictionDefinition
ModelId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the model to use when generating the insight. This field is a polymorphic relationship field. Relationship Name Model Relationship Type Lookup Refers To MLModel

Field	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the AIRecordInsight.
PredictionField	Type string Properties Filter, Group, Nillable, Sort Description The label of the field that Einstein is making predictions for, such as "Case.IsEscalated".
RunGuid	Type string Properties Filter, Group, Sort Description A unique identifier for the Einstein process that made the prediction.
RunStartTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time the Einstein prediction process was started.
Status	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The status of this insight. Possible values are: • Defunct—The insight has been consumed by the Einstein feature that owns the prediction. For example, Case Classification marks an insight as defunct if a predicted recommendation was presented to a user and the user either accepted or ignored the recommendation. This behavior ensures that the same recommendation isn't presented multiple times to the user. • New—The insight hasn't been consumed by the Einstein feature.

Field	Details
TargetField	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The field to which prediction results are written. Case Classification doesn't use this field.
TargetId	Type reference Properties Filter, Group, Sort Description The unique ID of the record Einstein is making predictions for. This is a relationship field. Relationship Name Target Relationship Type Lookup Refers To Account, Accreditation, ActivationTarget, Address, AlternativePaymentMethod, ApiAnomalyEventStore, AssessmentIndicatorDefinition, AssessmentTask, AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskIndDefinition, AssessmentTaskOrder, Asset, AssetRelationship, AssignedResource, AssociatedLocation, AuthorizationForm, AuthorizationFormConsent, AuthorizationFormDataUse, AuthorizationFormText, Award, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, Campaign, CampaignMember, CardPaymentMethod, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis, CareInterventionType, CareMetricTarget, CareObservation, CareObservationComponent, CarePgmProvHealthcareProvider, CarePreauth, CarePreauthItem, CareProgram, CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee, CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider, CareProgramTeamMember, CareProviderAdverseAction, CareProviderFacilitySpecialty, CareProviderSearchableField, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareSpecialtyTaxonomy, CareTaxonomy, Case, CodeSet, CodeSetBundle, CommSubscription, CommSubscriptionChannelType, CommSubscriptionConsent, CommSubscriptionTiming, ConsumptionRate, ConsumptionSchedule, Contact, ContactEncounter, ContactEncounterParticipant, ContactPointAddress, ContactPointConsent, ContactPointEmail, ContactPointPhone, ContactPointTypeConsent, ContactRequest, ContentVersion, Contract, CoverageBenefit, CoverageBenefitItem, CredentialStuffingEventStore, CreditMemo, CreditMemoLine, DataUseLegalBasis, DataUsePurpose, DelegatedAccount, DigitalWallet, DocumentChecklistItem, DuplicateRecordItem, DuplicateRecordSet, EmailMessage, EngagementChannelType, EnrollmentEligibilityCriteria, Event, HealthCareDiagnosis,

Field	Details
	HealthCareProcedure, HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, Idea, Identifier, IdentityDocument, Image, Individual, IndividualApplication, Invoice, InvoiceLine, Lead, Location, LocationTrustMeasure, MemberPlan, MessagingEndUser, OperatingHours, Opportunity, OpportunityContactRole, OpportunityLineItem, Order, OrderItem, OtherComponentTask, PartyConsent, Payment, PaymentAuthAdjustment, PaymentAuthorization, PaymentGateway, PaymentGroup, PaymentLineInvoice, PersonEducation, PersonLanguage, PersonLifeEvent, PersonName, PlanBenefit, PlanBenefitItem, Pricebook2, PricebookEntry, ProcessException, Product2, ProductConsumptionSchedule, ProductFulfillmentLocation, ProductItem, ProductItemTransaction, ProductRequest, ProductRequestLineItem, ProductRequired, ProductTransfer, ProfileSkill, ProfileSkillEndorsement, ProfileSkillUser, PurchaserPlan, PurchaserPlanAssn, QuickText, ReceivedDocument, Recommendation, Refund, RefundLinePayment, ReportAnomalyEventStore, ResourceAbsence, ResourcePreference, ReturnOrder, ReturnOrderItemAdjustment, ReturnOrderItemTax, ReturnOrderLineItem, ServiceAppointment, ServiceResource, ServiceResourceSkill, ServiceTerritory, ServiceTerritoryMember, ServiceTerritoryWorkType, SessionHijackingEventStore, SharingRecordCollection, Shift, Shipment, ShipmentItem, SkillRequirement, SocialPersona, SocialPost, Solution, Task, TimeSlot, UnitOfMeasure, UserProvisioningRequest, VideoCall, Visit, VisitedParty, Visitor, VoiceCall, VolunteerProject, WorkBadge, WorkBadgeDefinition, WorkOrder, WorkOrderLineItem, WorkThanks, WorkType, WorkTypeGroup, WorkTypeGroupMember
TargetSubjectType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of the target object, such as Account or Case.
Type	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of insight. Possible values are: • Action—An insight that indicates a suggested action, such as sending an email. • Lookup—An insight that indicates a related value not directly related to the target object and field. • MultiValue—An insight with multiple values, such as a multi-class classification. • SimilarRecord—An insight that indicates similar or duplicate records. • SingleValue—A single value insight, such as a regression number or a score.
ValidUntil	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort
	Description The day and time this insight is valid until. After this day and time, the insight might no longer be valid due to new prediction results from new or changed data. If this field is null, this insight never expires.

Usage

When an Einstein feature makes a prediction and saves the results, the following events happen in a single atomic operation:

- An AIRecordInsight record is created and populated with information about the prediction insight. AllInsightAction, AllInsightReason, and AllInsightValue records are also created and made children of the AIRecordInsight record.
- If the Einstein feature uses AI prediction fields, prediction result values are written to the target AI prediction field.
- An AIPredictionEvent platform event is created, and any subscriber to AIPredictionEvent is notified.

When Einstein writes prediction results back to AI prediction fields, record save custom logic, such as Apex triggers, workflow rules, and assignment rules, aren't run. To add custom logic based on Einstein prediction results, use a platform event subscriber, such as Process Builder, to get notifications for AIPredictionEvents that contain references to Einstein insight objects.

Custom fields can't be added to Einstein insight objects.

Einstein insights contain information about target fields and predicted value. Your org may have created Einstein predictions that are associated with target fields with field-level security restrictions. To control how users access Einstein insights records, use Salesforce data access features such as user profiles and permission sets.

Considerations for Case Classification

To generate reports on the effectiveness of Einstein Case Classification predictions, use the root AIRecordInsight object and its child objects, [AllInsightFeedback](#) and [AllInsightValue](#). For example, you can determine how many cases received predictions, or how often agents accepted or rejected them.

- To determine how many cases received recommendations, the AIRecordInsight table identifies the case and contains a row for each field and each recommendation. In AIRecordInsight, the TargetId field contains the case ID. The PredictionField indicates which case field is being predicted. Each field value recommendation is contained in a separate AllInsightValue object with AIRecordInsight as the parent. For a picklist field, Einstein creates AllInsightValue objects with up to 10 field value recommendations. However, just the top three predictions appear to agents in the Einstein Field Recommendations component.
- To learn whether agents acted on any of the top three predictions, use the AllInsightFeedback object. When an agent updates fields after viewing Einstein's recommendations, or when Einstein applies a recommendation automatically, the object's AllInsightFeedbackType field contains Explicit. If the agent updates fields without viewing the predictions, such as on the case details tab, AllInsightFeedbackType is set to Implicit. When the agent applies the recommended value, the object's AiFeedback field is set to Positive; if the agent applies a different value, AiFeedback is Negative.

AIResearchPromptResult

Represents the research result generated by Agentforce or by Einstein from a standard or custom prompt template. This object is available in API version 64.0 and later.

When an Agentforce or an Einstein feature researches a record and saves the results, an AIResearchPromptResult record is created and populated with information about the researched record.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Research results are only available in orgs that have Einstein features with Einstein generative AI enabled.

Fields

Field	Details
AiGenActionItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The business action suggested by generative AI. This field is a polymorphic relationship field. Relationship Name AiGenActionItem Refers To AiGenActionItem
IsToxicityDetected	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Specifies whether the generated response contains toxic language (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
LatestErrorMessage	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The error message that displays if the result can't be generated.

Field	Details
LatestGenResponseIdRef	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the most recently generated result in the GenAIGeneration object. The object is derived from the Data Cloud data model object (DMO).
LatestGenerationDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time that the result was most recently generated.
LatestResult	Type textarea Properties Create, Nillable, Update Description The AI-generated result.
LatestSafetyScore	Type double Properties Create, Filter, Nillable, Sort, Update Description Overall safety score for the generated research. A higher value means the generated response is more likely to be safe. Minimum value of 0.0. Maximum value of 1.0.
LatestStatus	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The status of the generated result. Possible values are: • Generating • Success • Failed

Field	Details
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the generated research result. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
ReferenceRecordId	Type reference Properties Create, Filter, Group, Sort, Update Description The record ID that the research result was generated for. This field is a polymorphic relationship field. Relationship Name ReferenceRecord Refers To Account, Lead, Opportunity
StandardPromptTemplate	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The standard prompt template used to generate the result.
Version	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The prompt template version number.

Associated Objects

This object has the following associated objects. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

AIResearchPromptResultFeed on page 55

Feed tracking is available for the object.

AIResearchPromptResultHistory on page 63

History is available for tracked fields of the object.

AIResearchPromptResultOwnerSharingRule on page 65

Sharing rules are available for the object.

AIResearchPromptResultShare on page 67

Sharing is available for the object.

AllowedEmailDomain

Represents an allowed email domain for users in your organization. You can define an allowlist to restrict the email domains allowed in a user’s Email field. This object is available in API version 29.0 and later.

Supported Calls

create(), delete(), describeObjects(), query(), retrieve(), update(), upsert()

Special Access Rules

You must have the “Manage Internal Users” user permission to use this object.

 **Note:** If you don’t see this object, contact your Salesforce representative to enable it.

Fields

Field	Details
Domain	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description An allowed email domain for users.

AlternativePaymentMethod

Represents a payment method that isn't cash, a debit card, or a credit card. This object defines methods that aren't defined by the [CardPaymentMethod](#) or [DigitalWallet](#) objects. Examples of alternative payment methods include CashOnDeliver, Klarna, and Direct Debit. `AlternativePaymentMethod` functions the same as any other type of payment method for processing transactions through a payment gateway. This object is available in API version 51.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access Salesforce Payments objects with the API, your org must have one or more of these licenses: Salesforce Payments, Salesforce Order Management, B2B Commerce, or D2C Commerce. Salesforce Payments objects are available only in Lightning Experience.

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The account for the alternative payment method. This field is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
AlternativePaymentMethodNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Salesforce ID number for the alternative payment method.
AuditEmail	Type email

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The email address of the payment owner where audit information about payments is sent.
BankAccountHolderType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Determines if the bank account is held by a business or an individual. Possible values are: • Business • Individual
BankAccountType	Type string Properties Filter, Group, Nillable, Sort Description Type of bank account such as a checking or savings account.
BillingFirstName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The first name of the payment method owner, based on their billing address details. This field is available in API version 58.0 and later.
BillingLastName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The last name of the payment method owner, based on their billing address details. This field is available in API version 58.0 and later.
BillingName	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The first and last name of the payment method owner, based on their billing address details. This field is available in API version 58.0 and later.
Comments	Type textarea Properties Create, Nillable, Update Description Users can add comments to provide additional details about a record. Maximum of 1000 characters.
CompanyName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Company name for this payment method. Part of the payment method's address.
Email	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description Email address of the payment method holder.
ExtendedPaymentMethodType	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Other alternative payment methods used for the transaction. This field is available in API version 66.0 and later.
GatewayToken	Type encryptedstring Properties Create, Nillable, Update

Field	Details
	Description Tokenized form of the alternative payment method, returned by the gateway. Stored as encrypted text.
GatewayTokenDetails	Type textarea Properties Create, Filter, Nillable, Sort, Update Description A unique tokenized ID generated by the payment gateway when this payment method first interacts with the gateway. Used to identify the payment method during future transactions.
IpAddress	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description IP address for the payment method owner.
IsAutoPayEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the payment method can be used for recurring payments (True) or not (False). The default value is False. This field is available in API v55.0 and later. For orgs that upgraded from v54.0, you must add this field to the Alternative Payment Method page layout in the UI. It isn't automatically added.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible the user only accessed this record or list view (LastReferencedDate) but not viewed it.
MacAddress	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Mac Address of the payment method holder.
NickName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description User-defined nickname for this payment method.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The user who owns the alternative payment method. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PaymentGatewayId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the payment gateway entity used to handle transactions from this payment method. This field is a relationship field.

Field	Details
	Relationship Name PaymentGateway Relationship Type Lookup Refers To PaymentGateway
PaymentMethodAddress	Type address Properties Filter, Nillable Description Full address associated with the alternative payment method. For more information about address fields, see Address Compound Fields .
PaymentMethodCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Payment method address details.
PaymentMethodCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Payment method address details.
PaymentMethodDetails	Type string Properties Create, Filter, Group, Nillable, Sort Description Optional information about the payment method type. This field is available in API version 57.0 and later.
PaymentMethodGeocode Accuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description Accuracy level of the geocode for the payment method address. An accuracy level contains information about the location of a latitude and longitude. For more information about geolocation fields, see Geolocation Compound Field. Possible values are: • Address • Block • City • County • ExtendedZip • NearAddress • Neighborhood • State • Street • Unknown • Zip
PaymentMethodLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Latitude of the payment method address. Used with the PaymentMethodLongitude to specify the precise geolocation of the address. For details about geolocation compound fields, see Compound Field Considerations and Limitations.
PaymentMethodLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Longitude of the payment method address. Used with the PaymentMethodLatitude to specify the precise geolocation of the address. For details about geolocation compound fields, see Compound Field Considerations and Limitations.
PaymentMethodPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details of the address for this payment method.

Field	Details
PaymentMethodState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details of the address for this payment method.
PaymentMethodStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Details of the address for this payment method.
PaymentMethodSubType	Type string Properties Create, Filter, Group, Nillable, Sort Description More information about the payment method. For example, if the PaymentMethodType is Visa, this field can be a digital wallet. This field is available in API version 57.0 and later.
PaymentMethodType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Payment method used for the transaction, such as Visa, Mastercard, EPS, SepaDebit, and Klarna. This field is available in API version 57.0 and later.
Phone	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description Phone number of the payment method's owner.
ProcessingMode	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort

Field	Details
	Description Indicates whether the payment method was created in Salesforce or externally. Required. Possible values are: • External: Select this value if you create the alternative payment method record through any method other than the Salesforce Payments Connect API. • Salesforce: Select this value if you use Salesforce Payments Connect API to create the alternative payment method record.
SavedPaymentMethodId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the saved payment method record. Relationship Name SavedPaymentMethod Relationship Type Lookup Refers To SavedPaymentMethod
StandardEntryClassCode	Type picklist Properties Filter, Group, Restricted picklist, Sort Description A three-letter code that indicates how a customer or a business initiated and authorized an ACH payment. Possible values are: • CCD—Corporate credit or debit entry • PPD—Pre-arranged payment and deposit entry • TEL—Telephone-initiated entry • WEB—Internet or mobile-initiated entry
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The state of the payment method. Required.

Field	Details
	Possible values are: • Active—The Payments platform can use the alternative payment method to make payments. Active alternative payment methods can't be deleted. • Canceled—The Payments platform can no longer use the payment method to make payments. A value of Canceled can't be changed back to Active or InActive • InActive—The Payment platform currently can't use the payment method to make payments. Admins can change this value to Active or Canceled when needed.

AnalyticsChangeEventLog

Analytics Change Event Logs represent route or page changes made in the CRM Analytics. This object is available in API version 61.0 and later.



Note: This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
AnalyticsMode	Type string Properties Filter, Group, Nillable, Sort Description The location where the dashboard is displayed. In the Salesforce mobile app, embedded dashboards are logged as embedded first.
AnalyticsSessionIdentifier	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The ID of a particular session of CRM Analytics. Use this field to determine which log lines originated from a particular session.
AnalyticsTimestamp	Type double Properties Filter, Nillable, Sort Description The time when this log line was generated.
ClientIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.
CpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
IsMobile	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates that the dashboard is displayed in mobile (true) or not (false).
IsNew	Type boolean Properties Defaulted on create, Filter, Group, Sort Description The field indicates that this action opens a new tab (<code>true</code>) or goes back to a previously opened tab (<code>false</code>). The default value is <code>false</code> .

Field	Details
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
PageContext	Type string Properties Filter, Group, Nillable, Sort Description The name of the component hosting the main content of the page. For example: clients:cardsContainer.
PageIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the CRM Analytics dashboard page.
RecordIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The Salesforce ID of the CRM Analytics object.
ReopenCount	Type int Properties Filter, Group, Nillable, Sort Description If <code>IsNew</code> is <code>false</code>, the number of times that an existing page opens.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestId</code>. For example: 3nWgxWbDKWWDIk0FKfF5DV.
RunTime	Type double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds.
SavedViewIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the CRM Analytics dashboard saved view.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
TabIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the particular Analytics tab in the user interface.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.

Field	Details
Type	Type string Properties Filter, Group, Nillable, Sort Description The type of Apex callout. For example: REST or AJAX.
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: /home/home.jsp.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character Identifier of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.
ViewMode	Type string Properties Filter, Group, Nillable, Sort Description The view mode for the CRM Analytics asset. Possible values include <code>view</code> • <code>edit</code> • <code>present</code> • <code>JSON</code> • <code>print</code>

AnalyticsDashboard

Represents a Tableau Next dashboard. This object is available in API version 64.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`, `search()`

Special Access Rules

To access this object, you must have Tableau Next enabled in your org and a Tableau Next permission set.

Fields

Field	Details
AnalyticsWorkspaceId	Type reference Properties Filter, Group, Sort Description The ID of the Tableau Next workspace the dashboard is associated with. This field is a relationship field. Relationship Name AnalyticsWorkspace Refers To AnalyticsWorkspace
Description	Type textarea Properties Nillable Description The description of the dashboard.
DeveloperName	Type string Properties Filter, Group, Sort Description The API name of the dashboard.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The supported languages for the visualization. There are over 50+ supported language and dialect values.

Field	Details
LastDraftModifiedDate	Type dateTime Properties Filter, Nillable, Sort Description The last modified date for the dashboard in draft mode.
LastPublishedDate	Type dateTime Properties Filter, Nillable, Sort Description The last published date for the dashboard.
MasterLabel	Type string Properties Filter, Group, idLookup, Sort Description The label for the dashboard.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix for the dashboard.
OwnerId	Type reference Properties Filter, Group, Sort Description The user ID of the user who created the dashboard. This field is a relationship field. Relationship Name Owner Refers To User

Field	Details
Style	Type textarea Properties Nillable Description The widget style for the dashboard, represented as a JSON string. For example, <pre>{\"widgetStyle\":{\"backgroundColor\":\"#fffff\",\"borderSize\":0,\"borderColor\":\"#ccc\",\"borderWidth\":1,\"borderRadius\":0}}</pre>
TemplateAssetSourceName	Type string Properties Filter, Group, Nillable, Sort Description If the dashboard was created from a template, this is name of the asset source.
TemplateSource	Type string Properties Filter, Group, Nillable, Sort Description If the dashboard was created from a template, this is name of the template.
Version	Type double Properties Filter, Nillable, Sort Description The API version for the dashboard.

AnalyticsDownloadEventLog

AnalyticsDownloadEventLog represent downloads made from lens and dashboard in the CRM Analytics. This object is available in API version 61.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
AnalyticsSessionIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of a particular session of CRM Analytics. Use this field to determine which log lines originated from a particular session.
AnalyticsTimestamp	Type dateTime Properties Filter, Nillable, Sort Description The time when this log line was generated.
AssetIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The asset ID from the user download.
AssetType	Type string Properties Filter, Group, Nillable, Sort Description The asset type from the user download.
ClientIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.

Field	Details
CpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DatasetIdentifiers	Type string Properties Filter, Group, Nillable, Sort Description A comma-separated list of used dataset IDs.
DownloadFormat	Type string Properties Filter, Group, Nillable, Sort Description The format of the data for export.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
RecordCount	Type int Properties Filter, Group, Nillable, Sort Description The number of records exported.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description Globally unique identifier for a given request.
RunTime	Type double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: /home/home.jsp.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.

Field	Details
UserType	Type string Properties Filter, Group, Nillable, Sort Description The category of user license. Possible values are: • CsnOnly—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users. • CspLitePortal—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site. • CustomerSuccess—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. • Guest—Users whose access is limited so that your customers can view and interact with your site without logging in. • PowerCustomerSuccess—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy. • PowerPartner—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site. • SelfService—Users whose access is limited because they're organization customers and access the application through a self-service portal. • Standard—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

AnalyticsInteractEventLog

Analytics Interact Event Log represents route or page changes made in the CRM Analytic UI. This object is available in API version 61.0 and later.



Note: This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
AnalyticsSessionIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of a particular session of CRM Analytics. Use this field to determine which log lines originated from a particular session.
AnalyticsTimestamp	Type datetime Properties Filter, Nillable, Sort Description The time when this log line was generated.
ClickCount	Type int Properties Filter, Group, Nillable, Sort Description The number of clicks performed on a page in the CRM Analytics UI.
ClientIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.
CpuTime	Type double Properties Filter, Nillable, Sort

Field	Details
	Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCSym5eyvtEK2I.
ReadTime	Type double Properties Filter, Nillable, Sort Description The amount of time a user spent on a particular tab.
RecordIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of the CRM Analytics object.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestIdentifier</code>. For example: 3nWgxWbDKWWDiK0FKfF5DV.
RunTime	Type double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds.

Field	Details
SessionCount	Type int Properties Filter, Group, Nillable, Sort Description The number of times a user returned to a particular page.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
TabIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the particular Analytics tab in the UI.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
TotalTime	Type double Properties Filter, Nillable, Sort Description The total amount of time (in milliseconds) a tab is open.
Type	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The CRM Analytics object type.
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: <code>/home/home.jsp</code> .
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the user who's using Salesforce services through the UI or the API. For example: <code>005300000009M943</code> .
ViewMode	Type string Properties Filter, Group, Nillable, Sort Description The view mode for the CRM Analytics asset. Possible values include <code>view</code> • <code>edit</code> • <code>present</code> • <code>JSON</code> • <code>print</code>

Usage

This event type is captured when a tab is closed. It collates the interaction statistics over the life of the tab, including total open time, read time, and so on. These statistics are aggregated as you go to other tabs and then return, and logged only when the tab is closed.

AnalyticsLicensedAsset

Represents a licensed Analytics asset. In this context, Analytics is CRM Analytics, Sonic, or Mulesoft Data Path. Available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
ConsumerNamespace	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The consumer namespace for the asset. The possible values are: • Industries
LicenseType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The license type for the asset. The possible values are: • Aqs (Analytics Query Service) • Cdp (Data Cloud) • DataPipelineQuery (Data Pipeline Query) • EinsteinAnalytics (CRM Analytics) • MulesoftDataPath (Mulesoft DataPath) • Sonic (Salesforce Data Pipelines) The default value is EinsteinAnalytics.

AnalyticsPerfEventLog

Analytics Perf Event Log helps track trends in your Analytics performance. This object is available in API version 61.0 and later.

 **Note:** This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
AnalyticsSessionIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of a particular session of CRM Analytics. Use this field to determine which log lines originated from a particular session.
AnalyticsTimestamp	Type datetime Properties Filter, Nillable, Sort Description The time when this log line is generated.
ClientIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.
CpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
EffectivePageTime	Type double Properties Filter, Nillable, Sort

Field	Details
	Description The experienced page time in milliseconds.
IsInitialLoad	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the event is for the initial load of the Dashboard (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCSym5eyvtEK2I.
QueriedName	Type string Properties Filter, Group, Nillable, Sort Description The asset title or query string.
RecordIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of the CRM Analytics object.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestIdentifier</code> . For example: 3nWgxWbDKWWDIk0FKfF5DV.

Field	Details
RunTime	Type double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
TabIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the particular Analytics tab in the UI.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: /home/home.jsp.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.
ViewMode	Type string Properties Filter, Group, Nillable, Sort Description The view mode for the CRM Analytics asset. Possible values include <code>view</code> <code>edit</code> <code>present</code> <code>JSON</code> <code>print</code>

AnalyticsVisualization

Represents a Tableau Next viusalization. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

To access this object, you must have Tableau Next enabled in your org and a Tableau Next permission set.

Fields

Field	Details
AnalyticsWorkspaceId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the Tableau Next workspace the visualization is associated with. This field is a relationship field. Relationship Name AnalyticsWorkspace

Field	Details
	Refers To AnalyticsWorkspace
Description	Type string Properties Create, Nillable, Update Description The description of the visualization.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The API name of the visualization.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The supported languages for the visualization. There are over 50+ supported language and dialect values.
LastDraftModifiedDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The last modified date for the visualization in draft mode.
LastPublishedDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The last published date for the visualization.
MasterLabel	Type string

Field	Details
	Properties Create, Filter, Group, idLookup, Sort, Update Description The label for the visualization.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix for the visualization.
OwnerId	Type reference Properties Create, Filter, Group, Sort Description The user ID of the user who created the visualization. This field is a relationship field. Relationship Name Owner Refers To User
TemplateAssetSourceName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description If the visualization was created from a template, this is name of the asset source.
TemplateSource	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description If the visualization was created from a template, this is name of the template.
Version	Type double

Field	Details
	Properties Create, Filter, Nillable, Sort, Update
	Description The API version for the visualization.

AnalyticsVizField

Represents a Tableau Next viusalization field. This object is available in API version 65.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, you must have Tableau Next enabled in your org and a Tableau Next permission set.

Fields

Field	Details
AdHocCalc	Type textarea
	Properties Create, Nillable, Update
	Description An ad-hoc calculation for the visualization field.
DisplayCategory	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The display category for the visualization field. Possible values are: - Continuous—continuous - Discrete—discrete
FieldKey	Type string

Field	Details
	Properties Create, Filter, Group, Sort, Update Description The key for for the visualization field.
Function	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The function for the visualization field. Possible values are: • Avg • Count • CountD • DatePartDay • DatePartMonth • DatePartQuarter • DatePartWeek • DatePartWeekDay • DatePartYear • DateTruncDay • DateTruncMonth • DateTruncQuarter • DateTruncWeek • DateTruncYear • FiscalDatePartMonth • FiscalDatePartQuarter • FiscalDatePartWeek • FiscalDatePartYear • FiscalDateTruncMonth • FiscalDateTruncQuarter • FiscalDateTruncWeek • FiscalDateTruncYear • Max • Mdy • Median • Min

Field	Details
	• My • Stdev • Stdevp • Sum • UserAgg • Var • Varp
Label	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The label for the visualization field.
Role	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The role for the visualization field. Possible values are: • Dimension • Measure
SemanticFieldApiName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The API for the field in the semantic model.
SemanticObjectApiName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The API name for object the field belongs to in the semantic model.
Type	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type for the visualization field. Possible values are: - Field - MeasureNames - MeasureValues
UniqueIndex	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The unique index value for the visualization field. This field is a calculated field.
VisualizationId	Type reference Properties Create, Filter, Group, Sort Description The ID of the visualization the field belongs to. This field is a relationship field. Relationship Name Visualization Relationship Type Master-detail Refers To AnalyticsVisualization (the master object)

AnalyticsVizViewDef

Represents a Tableau Next viusalization view definition. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, you must have Tableau Next enabled in your org and a Tableau Next permission set.

Fields

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The API name of the visualization view definition.
IsOriginal	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the view definition is original (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The supported languages for the visualization view definition. Possible values are: • <code>da</code>—Danish • <code>de</code>—German • <code>en_US</code>—English • <code>es</code>—Spanish • <code>es_MX</code>—Spanish (Mexico) • <code>fi</code>—Finnish • <code>fr</code>—French • <code>it</code>—Italian • <code>ja</code>—Japanese • <code>ko</code>—Korean • <code>nl_NL</code>—Dutch • <code>no</code>—Norwegian

Field	Details
	- pt_BR—Portuguese (Brazil) - ru—Russian - sv—Swedish - th—Thai - zh_CN—Chinese (Simplified) - zh_TW—Chinese (Traditional)
MasterLabel	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The label for the visualization view definition.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix for the visualization view definition.
OwnerId	Type reference Properties Create, Filter, Group, Sort Description The user ID of the user who created the visualization view definition. This field is a relationship field. Relationship Name Owner Refers To User
Version	Type double Properties Create, Filter, Nillable, Sort, Update Description The API version for the visualization view definition.

Field	Details
VisualizationId	Type reference Properties Create, Filter, Group, Sort, Update Description This field is a relationship field. Relationship Name Visualization Refers To AnalyticsVisualization

AnalyticsWorkspace

Represents a Tableau Next workspace. This object is available in API version 54.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`, `search()`

Special Access Rules

To access this object, you must have Tableau Next enabled in your org and a Tableau Next permission set.

Fields

Field	Details
Description	Type textarea Properties Nillable Description The description for the workspace.
DeveloperName	Type string Properties Filter, Group, Sort Description The API name for the workspace.

Field	Details
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The supported languages for the workspace. Possible values are: • da—Danish • de—German • en_US—English • es—Spanish • es_MX—Spanish (Mexico) • fi—Finnish • fr—French • it—Italian • ja—Japanese • ko—Korean • nl_NL—Dutch • no—Norwegian • pt_BR—Portuguese (Brazil) • ru—Russian • sv—Swedish • th—Thai • zh_CN—Chinese (Simplified) • zh_TW—Chinese (Traditional)
MasterLabel	Type string Properties Filter, Group, idLookup, Sort Description The label for the workspace.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix for the workspace.

AnalyticsWorkspaceAsset

Represents a Tableau Next asset in a workspace. This object is available in API version 54.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

To access this object, you must have Tableau Next enabled in your org and a Tableau Next permission set.

Fields

Field	Details
ActivePromotionRequestId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the active promotion request for the workspace asset. This field is a relationship field. Relationship Name ActivePromotionRequest Refers To DataAssetPromotionRequest
AnalyticsWorkspaceId	Type reference Properties Filter, Group, Sort Description The ID of the Tableau Next workspace the asset is associated with. This field is a relationship field. Relationship Name AnalyticsWorkspace Relationship Type Master-detail Refers To AnalyticsWorkspace (the master object)

Field	Details
AssetId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the asset. This field is a polymorphic relationship field. Relationship Name Asset Refers To AnalyticsDashboard, AnalyticsVisualization
AssetType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of asset. Possible values are: - AnalyticsDashboard—Analytics Dashboard - AnalyticsVisualization—Analytics Visualization - MktCalculatedInsightObject—Calculated Insight Object - MktDataConnection—Data Cloud Connection - MktDataLakeObject—Data Lake Object - MktDataModelObject—Data Model Object - SemanticModel—Semantic Model
AssetUsageType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of usage for the asset. Possible values are: - Created - Referenced
HistoricalPromotionStatus	Type picklist

Field	Details
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description The historical promotion status for the asset. Possible values are: • pending • promoted • unpromoted
MetadataSourceType	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description The source type of the asset metadata. Possible values are: • Promoted • Reused

Announcement

Represents a Chatter group announcement. This object is available in API version 30.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
ExpirationDate	Type dateTime
	Properties Create, Filter, Sort, Update
	Description Required. The date on which the announcement expires. Announcements display on the group UI until 11:59 p.m. local time on the selected date.

Field Name	Details
FeedItemId	Type reference Properties Create, Filter, Group, Sort Description Required. The ID of the FeedItem that contains the content of the announcement. Announcements are stored as text posts. This is a relationship field. Relationship Name FeedItem Relationship Type Lookup Refers To FeedItem
ParentId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the parent CollaborationGroup that the announcement belongs to. An announcement can belong only to a single Chatter group. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To CollaborationGroup
SendEmails	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Set to <code>true</code> to email all group members when an announcement is posted to the group. The default is <code>false</code>. This requires the user to have the “Send announcement on email” permission. This field is available in API version 36.0 and later.

Field Name

Details



Note: This field is currently available to select customers through a pilot program. To be nominated to join this pilot program, contact Salesforce. Additional terms and conditions may apply to participate in the pilot program. Please note that pilot programs are subject to change, and as such, we cannot guarantee acceptance into this pilot program or a particular time frame in which this feature can be enabled. Any unreleased services or features referenced in this document, press releases, or public statements are not currently available and may not be delivered on time or at all. Customers who purchase our services should make their purchase decisions based upon features that are currently available.

Usage

Group owners, managers, and users with the “Modify All Data” permission can use the Announcement object to create, edit, and delete group announcements. Creating a group announcement is a three-step process.

1. Use the FeedItem object to create a text post with the announcement’s content. Use the CollaborationGroup record you want to post the announcement to as the parent of this feed item.
2. Next, use the feed item ID and an expiration date to create the announcement record.
3. Finally, update the `AnnouncementId` field in the CollaborationGroup record with the ID of the announcement you created.

To delete the group announcement, simply delete the `AnnouncementId` value in the CollaborationGroup record. To restore a group announcement, update the `AnnouncementId` field for a group with the announcement’s ID. The expiration date for the announcement should be in the future and the feed item used to create the announcement should be parented by the same group.

ApexCalloutEventLog

Apex Callout event logs contain details about callouts (external requests) during Apex code execution. This object is available in API version 55.0 and later.



Note: This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
BotIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the bot.
BotSessionIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The bot session ID.
ClientIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.
CpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
IsSuccess	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the callout request was successful.
LoginKey	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
Method	Type string Properties Filter, Group, Nillable, Sort Description The HTTP method of the callout. For example: GET, POST, PUT, and so on.
PlannerIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the agent planner.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same RequestId. For example: 3nWgxWbDKWWDIk0FKfF5DV.
RequestSize	Type double Properties Filter, Nillable, Sort Description The size of the callout request body, in bytes.
RequestTime	Type double Properties Filter, Nillable, Sort

Field	Details
	Description The amount of time that the request took in milliseconds.
ResponseSize	Type double Properties Filter, Nillable, Sort Description The size of the callout response, in bytes.
RunTime	Type double Properties Filter, Nillable, Sort Description Not used for this event type. Use the <code>RequestTime</code> field instead.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
StatusCode	Type int Properties Filter, Group, Nillable, Sort Description The returned status code of the request.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.

Field	Details
Type	Type string Properties Filter, Group, Nillable, Sort Description The type of Apex callout. For example: <code>REST</code> or <code>AJAX</code> .
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: <code>/home/home.jsp</code> .
Url	Type string Properties Filter, Nillable, Sort Description The callout endpoint URL. For example, <code>www.salesforce.com</code> .
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the user who's using Salesforce services through the UI or the API. For example: <code>00530000009M943</code> .

ApexClass

Represents an Apex class.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()` `update()`, `upsert()`

Fields

Field	Details
ApiVersion	Type double Properties Create, Filter, Sort, Update Description The API version for this class. Every class has an API version specified at creation.
Body	Type textarea Properties Create, Nillable, Update Description The Apex class definition. Limit: 1 million characters.
BodyCrc	Type double Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description The CRC (cyclic redundancy check) of the class or trigger file.
IsValid	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether any dependent metadata has changed since the class was last compiled (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
LengthWithoutComments	Type int Properties Create, Filter, Group, Sort, Update Description Length of the class without comments.
Name	Type string

Field	Details
	Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the class. Limit: 255 characters
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The current status of the Apex class. The following string values are valid: • <code>Active</code>—The class is active. • <code>Deleted</code>—The class is marked for deletion. This is useful for managed packages, because it allows a class to be deleted when a managed package is updated. • <code>Inactive</code>—This option is unused and is only supported for ApexTrigger. For more information, see the Metadata API Developer Guide.

Usage

Although Apex classes and triggers have the Create and Update field properties, a runtime exception occurs if you try to create, update, or delete them using the API. Instead, use the Salesforce Extensions for Visual Studio Code or the Ant Migration Tool to create or update Apex classes or triggers. Apex classes and triggers can't be created, edited, or deleted in a production org. See [Deploying Apex](#).

SEE ALSO:

- [ApexTrigger](#)
- [Developer Guide: Apex Developer Guide](#)

ApexComponent

Represents a definition for a custom component that can be used in a Visualforce page alongside standard components such as `<apex:relatedList>` and `<apex:dataTable>`.

Represents a definition for a custom component that can be used in a Visualforce page alongside standard components such as `<apex:relatedList>` and `<apex:dataTable>`. For information, see the [Visualforce Developers Guide](#).

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Fields

Field	Details
ApiVersion	Type double Properties Create, Filter, Sort, Update Description The API version for this custom component. Every custom component has an API version specified at creation. If the API version is less than 15.0 and <code>ApiVersion</code> is not specified, <code>ApiVersion</code> defaults to 15.0.
ControllerKey	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The identifier for the controller associated with this custom component: If the <code>ControllerType</code> parameter is set to <code>Standard</code> or <code>StandardSet</code>, this value is the name of the sObject that defines the controller.

Field	Details
	If the <code>ControllerType</code> parameter is set to <code>Custom</code>, this value is the name of the Apex class that defines the controller.
ControllerType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of controller associated with this Visualforce custom component. Possible values include: <code>Not Specified</code>, for custom components defined without a value for the <code>controller</code> attribute on the <code><apex:component></code> tag <code>Standard</code>, a value that can't be used with custom components or errors may occur <code>StandardSet</code>, a value that can't be used with custom components or errors may occur <code>Custom</code>, for components that have a value for the <code>controller</code> attribute on the <code><apex:component></code> tag
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Description of the Visualforce custom component.
Markup	Type textarea Properties Create, Update Description The Visualforce markup, HTML, Javascript, and any other Web-enabled code that defines the content of the custom component.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The text used to identify the Visualforce custom component in the Setup area of Salesforce. The Label for this field is Label.

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Name of this Visualforce custom component.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.

Usage

Use custom components to encapsulate a common design pattern and then reuse that pattern several times in one or more Visualforce pages. All users who can view Visualforce pages can view custom components, but the “Customize Application” permission is required to create or update custom components.

SEE ALSO:

[ApexPage](#)

[StaticResource](#)

[Developer Guide: Visualforce Developer Guide](#)

ApexEmailNotification

Stores a Salesforce user ID or external email address to be notified when unhandled Apex exceptions occur. This object is available in API version 35.0 and later.

 **Note:** Each ApexEmailNotification contains either an email or a user ID, but not both.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
Email	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The external email address to which the notification is sent. Mutually exclusive with the <code>UserId</code> field.
UserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the user to which the notification is sent. Mutually exclusive with the <code>Email</code> field. This is a relationship field. Relationship Name User Relationship Type Lookup Refers To User

Usage

To notify users of your org at the email addresses they have on record, use `UserId`. To notify external users or alternate email addresses, use `Email`.

ApexExecutionEventLog

Apex Execution event logs contain details about Apex classes that are used. This object is available in API version 55.0 and later.

 **Note:** This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
<code>BotIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The ID of the bot.
<code>BotSessionIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The bot session ID.
<code>CalloutTime</code>	Type double Properties Filter, Nillable, Sort Description Time spent waiting on webservice callouts, in milliseconds.
<code>ClientIp</code>	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". If the user's session context isn't available, this field returns a blank value.
<code>CpuTime</code>	Type double

Field	Details
	Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DatabaseTotalTime	Type double Properties Filter, Nillable, Sort Description Time (in milliseconds) spent waiting for database processing in aggregate for all operations in the request. Compare this field to <code>CpuTime</code> to determine whether performance issues are occurring in the database layer or in your own code.
EntryPoint	Type string Properties Filter, Group, Nillable, Sort Description The entry point for this Apex execution. For example, <code>GeneralCloner.cloneAndInsertRecords</code> or <code>VF- /apex/CloneUser</code>.
ExecutionTime	Type double Properties Filter, Nillable, Sort Description The end-to-end Apex execution time (in milliseconds).
IsLongRunningRequest	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the request is counted against your org's concurrent long-running Apex request limit (<code>true</code>) or not (<code>false</code>). Asynchronous Apex jobs (batch, queueable, scheduled, and future), background processes, and bulk API requests are not counted against the concurrent long-running limit.
LoginKey	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
PlannerIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the agent planner.
Quiddity	Type string Properties Filter, Group, Nillable, Sort Description The type of outer execution associated with this event. For example: • A—ACS Batch Apex • C—Scheduled Apex • E—Inbound Email Service • F—Future • H—Apex REST • I—Invocable Action • K—Quick Action • L—Lightning • M—Remote Action • P—Bulk Apex jobs running in parallel • Q—Queueable • R—Synchronous uncategorized (which is where all transactions not specified elsewhere end up) • S—QueryLocator Batch Apex (Batch Apex jobs run faster when the start method returns a QueryLocator object that doesn't include related records via a subquery. See Batch Apex Best Practices in Using Batch Apex.) • T—Tests Apex • V—Visualforce • W—SOAP Webservices • X—Execute Anonymous

Field	Details
	Implementations of the Process.Plugin interface use the quiddity value <code>R</code> .
<code>RequestIdIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestId</code>. For example: <code>3nWgxWbDKWWDIk0FKfF5DV</code>.
<code>RunTime</code>	Type double Properties Filter, Nillable, Sort Description The amount of time the request took, as measured by SFDC code.
<code>SessionKey</code>	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: <code>d7DEq/ANa7nNZZVD</code>.
<code>SoqlQueryCount</code>	Type double Properties Filter, Nillable, Sort Description The number of SOQL queries that were executed during the event. This value is the aggregate across all namespaces, and can exceed the per-namespace limits. For test executions, the aggregate total value across all test methods executed in the request is used. If you are using this value to track limit consumption, consider filtering out test execution quiddities (indicated by the <code>Quiddity</code> field).
<code>Timestamp</code>	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: /home/home.jsp.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.

ApexExtlCalloutEventLog

Apex Extl Callout EventLog represent external data callouts via custom adapters for Salesforce Connect. This object is available in API version 61.0 and later.



Note: This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
Action	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description Action performed by the callout.
ExecutionTime	Type double Properties Filter, Nillable, Sort Description The end-to-end Apex execution time in milliseconds.
FetchTime	Type double Properties Filter, Nillable, Sort Description Duration (in milliseconds) it takes to retrieve the query results from the external system.
IsSuccess	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the query was successful (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .
Message	Type string Properties Filter, Nillable, Sort Description Error or warning message associated with the failed call.
ObjectType	Type string Properties Filter, Group, Nillable, Sort Description The type of event. The value is always BulkApi2.

Field	Details
QueryFilter	Type string Properties Filter, Group, Nillable, Sort Description Field expressions to filter the rows to return. Corresponds to <code>WHERE</code> in SOQL queries.
QueryLimit	Type double Properties Filter, Nillable, Sort Description Maximum number of rows to return for a query. Corresponds to <code>LIMIT</code> in SOQL queries.
QueryOffset	Type double Properties Filter, Nillable, Sort Description Number of rows to skip when paging through a result set. Corresponds to <code>OFFSET</code> in SOQL queries.
QueryOrderBy	Type string Properties Filter, Group, Nillable, Sort Description Field or column to use for sorting query results, and whether to sort the results in ascending (default) or descending order. Corresponds to <code>ORDER BY</code> in SOQL queries.
QuerySelect	Type string Properties Filter, Group, Nillable, Sort Description Comma-delineated list of fields being queried. Corresponds to <code>SELECT</code> in SOQL queries.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestId</code>. For example: 3nWgxWbDKWWDIk0FKfF5DV.
RowCount	Type int Properties Filter, Group, Nillable, Sort Description Total number of records in the result set.
RowsFetched	Type double Properties Filter, Nillable, Sort Description Number of rows fetched by the callout.
Subqueries	Type double Properties Filter, Nillable, Sort Description Number of subqueries this query has been split into.
Throughput	Type double Properties Filter, Nillable, Sort Description Number of records retrieved in one second.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.

Field	Details
TotalTime	Type double Properties Filter, Nillable, Sort Description How long it takes (in milliseconds) to prepare and execute the query and to retrieve the query results.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.

ApexInlineEventLog

This object is reserved for future use. This object is available in API version 66.0 and later.

ApexLog

Represents a debug log containing information about a transaction, including information about Apex, Visualforce, and workflow and validation rules. This object is available in API version 19.0 and later.

Supported Calls

`delete()`, `describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
Application	Type string Properties Filter, Group, Sort Description This value depends on the client type that triggered the log. For API clients, this value is the client ID.

Field	Details
	For browser clients, this value is <code>Browser</code>.
DurationMilliseconds	Type int Properties Filter, Group, Sort Description Duration of the transaction in milliseconds.
Location	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Specifies the location of the origin of the log. Values are: <code>Monitoring</code>—Log is generated as part of debug log monitoring. These types of logs are maintained for seven days or until a user deletes them. <code>SystemLog</code>—Log is generated from the Developer Console. These types of logs are maintained for 24 hours or until the user clears them.
LogLength	Type int Properties Filter, Group, Sort Description Length of the log in bytes.
LogUserId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the user whose actions triggered the debug log. This is a polymorphic relationship field. Relationship Name LogUser Relationship Type Lookup Refers To User

Field	Details
Operation	Type string Properties Filter, Group, Sort Description Name of the operation that triggered the debug log, such as <code>APEXSOAP</code>, <code>Apex Sharing Recalculation</code>, and so on.
Request	Type string Properties Filter, Group, Sort Description Request type. Values are: • <code>API</code>—Request came from the API • <code>Application</code>—Request came from the Salesforce user interface
RequestIdIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique identifier of the request that triggered the debug log. Use this request identifier to correlate multiple debug logs triggered by the same request.
StartTime	Type dateTime Properties Filter, Sort Description Start time of the transaction.
Status	Type string Properties Filter, Group, Sort Description Status of the transaction. This value is either <code>Success</code>, or the text of an unhandled Apex exception.

Usage

You can read information about this object, as well as delete it, but you can't update or insert it.

SEE ALSO:

[ApexClass](#)

[ApexTrigger](#)

[Developer Guide: Apex Developer Guide](#)

ApexPage

Represents a single Visualforce page.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Fields

Field	Details
<code>ApiVersion</code>	Type double Properties Create, Filter, Sort, Update Description The API version for this page. Every page has an API version specified at creation. If the API version is less than 15.0 and <code>ApiVersion</code> is not specified, <code>ApiVersion</code> defaults to 15.0.
<code>ControllerKey</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The identifier for the controller associated with this page: • If the <code>ControllerType</code> parameter is set to <code>Standard</code> or <code>StandardSet</code>, this value is the name of the sObject that defines the controller. • If the <code>ControllerType</code> parameter is set to <code>Custom</code>, this value is the name of the Apex class that defines the controller.

Field	Details
ControllerType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of controller associated with this Visualforce page. Possible values include: • Not Specified, for pages defined with neither a <code>standardController</code> nor a <code>controller</code> attribute on the <code><apex:page></code> tag • Standard, for pages defined with the <code>standardController</code> attribute on the <code><apex:page></code> tag • StandardSet, for pages defined using the <code>standardController</code> and <code>recordSetVar</code> attribute on the <code><apex:page></code> tag • Custom, for pages defined with the <code>controller</code> attribute on the <code><apex:page></code> tag
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Description of the Visualforce page.
IsAvailableInTouch	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if Visualforce tabs associated with the Visualforce page can be used in the Salesforce mobile app (<code>true</code>) or not (<code>false</code>). (Use of this field for Salesforce Touch is deprecated.) This field is available in API version 27.0 and later. Standard object tabs that are overridden with a Visualforce page aren't supported in the Salesforce mobile app, even if you set this field for the page. The default Salesforce app page for the object is displayed instead of the Visualforce page.
IsConfirmationTokenRequired	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether <code>GET</code> requests for the page require a CSRF confirmation token (<code>true</code>) or not (<code>false</code>). This field is available in API version 28.0 and later.

Field	Details
	If you change this field's value from <code>false</code> to <code>true</code>, links to the page require a CSRF token to be added to them, or the page will be inaccessible.
Markup	Type textarea Properties Create, Update Description The Visualforce markup, HTML, Javascript, and any other Web-enabled code that defines the content of the page.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The text used to identify the Visualforce page in the Setup area of Salesforce. The Label is Label.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Name of this Visualforce page.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer.

Field	Details
	In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.

Usage

Use Visualforce pages to add custom content that extends the base Salesforce application functionality. All users in Visualforce-enabled organizations can view Visualforce pages, but the “Customize Application” permission is required to create or update them.

SEE ALSO:

[ApexComponent](#)

[StaticResource](#)

[Developer Guide: Visualforce Developer Guide](#)

ApexPageInfo

Represents metadata about a single Visualforce page. This object is available in API version 48.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

As of Summer '20 and later, this object can only be accessed by users who can view a particular Visualforce page, and users with the View Setup and Configuration permission.

Fields

Field	Details
<code>ApexPageId</code>	Type string Properties Filter, Group, Sort Description ID for the Visualforce page.
<code>ApiVersion</code>	Type double

Field	Details
	Properties Filter, Sort Description The API version for the page. Every page has an API version specified at creation. If the API version is less than 15.0 and <code>ApiVersion</code> is not specified, <code>ApiVersion</code> defaults to 15.0.
Description	Type textarea Properties Filter, Nillable, Sort Description Description of the Visualforce page.
DurableId	Type string Properties Filter, Group, Nillable, Sort Description For internal use only.
IsAvailableInTouch	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates if Visualforce tabs associated with the Visualforce page can be used in the Salesforce app (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .
IsShowHeader	Type string Properties Filter, Group, Nillable, Sort Description The <code>showHeader</code> value for the Visualforce page. This will be “unknown” if the Visualforce page uses an expression to compute <code>showHeader</code> . The default value is <code>true</code> .
MasterLabel	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The text used to identify the Visualforce page in the Setup area of Salesforce.
Name	Type string Properties Filter, Group, Sort Description Developer name of the Visualforce page.
NamespacePrefix	Type string Properties Filter, Nillable, Sort Description The namespace prefix associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. - In Developer Edition orgs, the namespace prefix is set to the namespace prefix of the org for all objects that support it.  Note: If an object is in an installed managed package, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. - In non-Developer Edition orgs, <code>NamespacePrefix</code> is only set for objects that are part of an installed managed package. Objects outside of an installed managed package do not have a namespace prefix.

Usage

Use `ApexPageInfo` to query limited metadata about Visualforce pages. Some of this metadata corresponds to settings for a Visualforce page available in Visualforce Pages. To access Visualforce Pages, from *Setup*, in the *Quick Find* box, enter *Custom Code*. Then, select Visualforce Pages. Other values are only available via API. Use `ApexPageInfo` in [Visualforce pages](#) to add custom content that extends the base Salesforce application functionality.

Users can only query `ApexPageInfo` records if they can display the associated Visualforce page, or if they have the View Setup & Configuration permission. Allow users to view Visualforce pages by modifying their user profile or assigning permission sets.

ApexRestApiEventLog

Apex REST API event logs capture information about every Apex REST API request. This object is available in API version 55.0 and later.

 **Note:** This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
ClientIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
CpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DatabaseBlocks	Type double Properties Filter, Nillable, Sort Description Indicates how much activity is occurring in the database. A high value for this field suggests that adding indexes or filters on your queries would benefit performance.
DatabaseCpuTime	Type double Properties Filter, Nillable, Sort

Field	Details
	Description The CPU time in milliseconds to complete the request. Indicates the amount of activity taking place in the database layer during the request.
DatabaseTotalTime	Type double Properties Filter, Nillable, Sort Description The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and DatabaseCpuTime. Compare this field to CpuTime to determine whether performance issues are occurring in the database layer or in your own code.
ExceptionMessage	Type string Properties Filter, Nillable, Sort Description The exception message for a SOAP API request. An exception message gives details about errors in handling an API request, such as why an API request failed. For example: common.exception.ApiException: startDate cannot be more than 30 days ago.
FieldCount	Type int Properties Filter, Nillable, Sort Description The number of fields or columns, where applicable.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
MediaType	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The media type of the response.
Method	Type string Properties Filter, Group, Nillable, Sort Description The apex method name.
ObjectName	Type string Properties Filter, Group, Nillable, Sort Description API objects that are accessed. For example: Account, Opportunity, Contact, and so on.
RequestIdIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same RequestId. For example: 3nWgxWbDKWWDIk0FKfF5DV.
RequestSize	Type double Properties Filter, Nillable, Sort Description The size of the callout request body, in bytes.
RequestStatus	Type String Description The status of the request for a page view or user interface action. For example:

Field	Details
	• S—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned. • F—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only. • U—Undefined • A—Authorization Error • R—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page. • N—Not Found. 404 error. This field can have a blank value.
ResponseSize	Type double Properties Filter, Nillable, Sort Description The size of the callout response, in bytes.
RowsProcessed	Type int Properties Filter, Group, Nillable, Sort Description The number of rows that were processed in the request. For example: 150.
RunTime	Type double Properties Filter, Nillable, Sort Description The amount of time the request took, as measured by SFDC code.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nZZVD.

Field	Details
StatusCode	Type int Properties Filter, Group, Nillable, Sort Description The HTTP status code for the response.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: /home/home.jsp.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.
UserType	Type string Properties Filter, Group, Nillable, Sort Description The category of user license. Possible values are: • <code>csnOnly</code>—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users.

Field	Details
	<code>CspLitePortal</code>—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site. <code>CustomerSuccess</code>—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. <code>Guest</code>—Users whose access is limited so that your customers can view and interact with your site without logging in. <code>PowerCustomerSuccess</code>—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy. <code>PowerPartner</code>—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site. <code>SelfService</code>—Users whose access is limited because they're organization customers and access the application through a self-service portal. <code>Standard</code>—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

ApexSoapApiEventLog

Apex SOAP event logs contain details about custom SOAP web service calls. This object is available in API version 55.0 and later.



Note: This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
<code>ClassName</code>	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The Apex class name. If the class is part of a managed package, this string includes the package namespace.
ClientIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.
ClientName	Type string Properties Filter, Group, Nillable, Sort Description The name of the client that's using Salesforce services. This field is an optional parameter that can be passed in API calls. If blank, the caller didn't specify a client in the CallOptions header.
CpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DatabaseTotalTime	Type double Properties Filter, Nillable, Sort Description Time (in milliseconds) spent waiting for database processing in aggregate for all operations in the request. Compare this field to <code>CpuTime</code> to determine whether performance issues are occurring in the database layer or in your own code.
LimitUsagePercent	Type double Properties Filter, Nillable, Sort

Field	Details
	Description The percentage of Apex SOAP calls that were made against the organization's limit.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
MethodName	Type string Properties Filter, Group, Nillable, Sort Description The name of the calling Apex method.
QueryString	Type string Properties Filter, Nillable, Sort Description The SOQL query, if one was performed.
RateLimitUsage	Type string Properties Filter, Group, Nillable, Sort Description The percent of the current usage of your rate limit.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same RequestIdentifier. For example: 3nWgxWbDKWWDIk0FKfF5DV.

Field	Details
RequestStatus	Type String Description The status of the request for a page view or user interface action. For example: • S—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned. • F—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only. • U—Undefined • A—Authorization Error • R—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page. • N—Not Found. 404 error. This field can have a blank value.
RunTime	Type double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds. Requests with a value over five seconds are considered long-running requests for the purposes of the Concurrent Long-Running Apex Limit. HTTP callout processing time isn't included when calculating the 5-second limit. We pause the timer for the callout and resume it when the callout completes.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
Timestamp	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: /home/home.jsp.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.
UserType	Type string Properties Filter, Group, Nillable, Sort Description The category of user license. Possible values are: • CsnOnly—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users. • CspLitePortal—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site. • CustomerSuccess—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. • Guest—Users whose access is limited so that your customers can view and interact with your site without logging in. • PowerCustomerSuccess—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy. • PowerPartner—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site.

Field	Details
	• SelfService—Users whose access is limited because they're organization customers and access the application through a self-service portal. • Standard—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

ApexTestQueueItem

Represents a single Apex class in the Apex job queue. This object is available in API version 23.0 and later.

This object is available in API version 23.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

In API version 49.0 and later, users must have the View Setup and Configuration permission to access this object.

Fields

Field Name	Description
ApexClassId	Type reference Properties Create, Filter, Group, Sort Description The Apex class whose tests are to be executed. This is a relationship field. Relationship Name ApexClass Relationship Type Lookup Refers To ApexClass
ExtendedStatus	Type string Properties Filter, Nillable, Sort

Field Name	Description
	Description The pass rate of the test run. For example: "(4/6)". This means that four out of a total of six tests passed. If the class fails to execute, this field contains the cause of the failure.
ParentJobId	Type reference Properties Filter, Group, Nillable, Sort Description Points to the AsyncApexJob that represents the entire test run. If you insert multiple Apex test queue items in a single bulk operation, the queue items share the same parent job. This means that a test run can consist of the execution of the tests of several classes if all the test queue items are inserted in the same bulk operation.
ShouldSkipCodeCoverage	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether to opt out of collecting code coverage information during Apex test runs. Available in API version 43.0 and later.
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort, Update Description The status of the job. Valid values are: • Holding¹ • Queued • Preparing • Processing • Aborted • Completed • Failed ¹ This status applies to batch jobs in the Apex flex queue.

Field Name	Description
TestRunResultId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the associated ApexTestRunResult object.

Usage

Insert an `ApexTestQueueItem` object to place its corresponding Apex class in the Apex job queue for execution. The Apex job executes the test methods in the class.

To abort a class that is in the Apex job queue, perform an update operation on the `ApexTestQueueItem` object and set its `Status` field to *Aborted*.

If you insert multiple Apex test queue items in a single bulk operation, the queue items share the same parent job. This means that a test run can consist of the execution of the tests of several classes if all the test queue items are inserted in the same bulk operation.

ApexTestResult

Represents the result of an Apex test method execution. This object is available in API version 23.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

In API version 49.0 and later, users must have the View Setup and Configuration permission to access this object.

Fields

Field Name	Details
ApexClassId	Type reference Properties Create, Filter, Group, Sort, Update Description The Apex class whose test methods were executed. This is a relationship field.

Field Name	Details
	Relationship Name ApexClass
	Relationship Type Lookup
	Refers To ApexClass
ApexLogId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Points to the ApexLog for this test method execution if debug logging is enabled; otherwise, null. This is a relationship field.
	Relationship Name ApexLog
	Relationship Type Lookup
	Refers To ApexLog
ApexTestRunResultId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The ID of the ApexTestRunResult that represents the entire test run. This is a relationship field.
	Relationship Name ApexTestRunResult
	Relationship Type Lookup
	Refers To ApexTestRunResult
AsyncApexJobId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description Points to the AsyncApexJob that represents the entire test run. This field points to the same object as ApexTestQueueItem.ParentJobId. This is a relationship field. Relationship Name AsyncApexJob Relationship Type Lookup Refers To AsyncApexJob
IsTestSetup	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if the results are for a test setup method. The default is false.
Message	Type string Properties Create, Filter, Nillable, Sort, Update Description The exception error message if a test failure occurs; otherwise, null.
MethodName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The test method name.
Outcome	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The result of the test method execution. Can be one of these values:

Field Name	Details
	• Pass • Fail • CompileFail • Skip
QueueItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Points to the ApexTestQueueItem which is the class that this test method is part of. This is a relationship field. Relationship Name QueueItem Relationship Type Lookup Refers To ApexTestQueueItem
RunTime	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The time it took the test method to run, in milliseconds.
StackTrace	Type string Properties Create, Filter, Nillable, Sort, Update Description The Apex stack trace if the test failed; otherwise, null.
TestTimestamp	Type dateTime Properties Create, Filter, Sort, Update Description The start time of the test method.

Usage

You can query the fields of the `ApexTestResult` record that corresponds to a test method executed as part of an Apex class execution.

Each test method execution is represented by a single `ApexTestResult` record. For example, if an Apex test class contains six test methods, six `ApexTestResult` records are created. These records are in addition to the `ApexTestQueueItem` record that represents the Apex class.

Each `ApexTestResult` record has an associated [ApexTestResultLimits](#) on page 611 record, which captures the Apex limits used during execution of the test method.

ApexTestResultLimits

Captures the Apex test limits used for a particular test method execution. An instance of this object is associated with each `ApexTestResult` record. This object is available in API version 37.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

In API version 49.0 and later, users must have the View Setup and Configuration permission to access this object.

Fields

Field Name	Details
<code>ApexTestResultId</code>	Type reference Properties Create, Filter, Group, Sort Description The ID of the associated ApexTestResult object. This is a relationship field. Relationship Name ApexTestResult Relationship Type Lookup Refers To ApexTestResult
<code>AsyncCalls</code>	Type int

Field Name	Details
	Properties Create, Filter, Group, Sort, Update Description The number of asynchronous calls made during the test run.
Callouts	Type int Properties Create, Filter, Group, Sort, Update Description The number of callouts made during the test run.
Cpu	Type int Properties Create, Filter, Group, Sort, Update Description The amount of CPU used during the test run, in milliseconds.
Dml	Type int Properties Create, Filter, Group, Sort, Update Description The number of DML statements made during the test run.
DmlRows	Type int Properties Create, Filter, Group, Sort, Update Description The number of rows accessed by DML statements during the test run.
Email	Type int Properties Create, Filter, Group, Sort, Update Description The number of email invocations made during the test run.

Field Name	Details
LimitContext	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates whether the test run was synchronous or asynchronous.
LimitExceptions	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates whether your org has any limits that differ from the default limits.
MobilePush	Type int Properties Create, Filter, Group, Sort, Update Description The number of mobile push calls made during the test run.
QueryRows	Type int Properties Create, Filter, Group, Sort, Update Description The number of rows queried during the test run.
Soql	Type int Properties Create, Filter, Group, Sort, Update Description The number of SOQL queries made during the test run.
Sosl	Type int Properties Create, Filter, Group, Sort, Update

Field Name	Details
	Description The number of SOSL queries made during the test run.

Usage

The ApexTestResultLimits object is populated for each test method execution, and it captures the limits used between the Test.startTest() and Test.stopTest() methods. If startTest() and stopTest() aren't called, limits usage isn't captured. Note the following:

- The associated test method must be run asynchronously.
- Limits for asynchronous Apex operations (batch, scheduled, future, and queueable) that are called within test methods aren't captured.
- Limits are captured only for the default namespace.

ApexTestRunResult

Contains summary information about all the test methods that were run in a particular Apex job. This object is available in API version 37.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

In API version 49.0 and later, users must have the View Setup and Configuration permission to access this object.

Fields

Field Name	Details
AsyncApexJobId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The parent Apex job ID for the result. This is a relationship field. Relationship Name AsyncApexJob Relationship Type Lookup

Field Name	Details
	Refers To AsyncApexJob
ClassesCompleted	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The total number of classes executed during the test run.
ClassesEnqueued	Type int Properties Create, Filter, Group, Sort, Update Description The total number of classes enqueued during the test run.
EndTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The time at which the test run ended.
IsAllTests	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether all Apex test classes were run.
JobName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Reserved for future use.
MethodsCompleted	Type int

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The total number of methods completed during the test run. This value is updated after each class is run.
MethodsEnqueued	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The total number of methods enqueued for the test run. This value is initialized before the test runs.
MethodsFailed	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The total number of methods that failed during this test run. This value is updated after each class is run.
Source	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The source of the test run, such as the Developer Console.
StartTime	Type dateTime Properties Create, Filter, Sort, Update Description The time at which the test run started.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update

Field Name	Details
	Description The status of the test run. Values include: • Queued • Preparing • Processing • Aborted • Completed • Failed
TestSetupTime	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The time it took the setup methods to run, in milliseconds.
TestTime	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The time it took the test to run, in milliseconds.
UserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The user who ran the test run. This is a relationship field. Relationship Name User Relationship Type Lookup Refers To User

ApexTestSuite

Represents a suite of Apex classes to include in a test run. A TestSuiteMembership object associates each class with the suite. This object is available in API version 36.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

In API version 49.0 and later, users must have the View Setup and Configuration permission to access this object.

Fields

Field Name	Description
TestSuiteName	Type string Properties Create, Filter, Group, Sort, Unique, Update Description The name of the Apex test suite. This label appears in the user interface. This value is case-sensitive and must be unique.

Usage

Insert a TestSuiteMembership object using an API call to associate an Apex class with an ApexTestSuite object. (ApexTestSuite and TestSuiteMembership aren't editable through Apex DML.) To remove the class from the test suite, delete the TestSuiteMembership object. If you delete an Apex test class or test suite, all TestSuiteMembership objects that contain that class or suite are deleted.

The following SOQL query returns the membership object that relates this Apex class to this test suite.

```
SELECT Id FROM TestSuiteMembership WHERE ApexClassId = '01pD0000000Fhy9IAC'
      AND ApexTestSuiteId = '05FD00000004CDBMA2'
```

SEE ALSO:

[TestSuiteMembership](#)

ApexTrigger

Represents an Apex trigger.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Fields

Field	Details
ApiVersion	Type double Properties Create, Filter, Sort, Update Description The API version for this trigger. Every trigger has an API version specified at creation.
Body	Type textarea Properties Create, Nillable, Update Description The Apex trigger definition. Limit: 1 million characters.
BodyCrc	Type double Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description The CRC (cyclic redundancy check) of the class or trigger file.
IsValid	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether any dependent metadata has changed since the trigger was last compiled (<code>true</code>) or not (<code>false</code>).
LengthWithoutComments	Type int Properties Create, Filter, Group, Sort, Update

Field	Details
	Description Length of the trigger without comments
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the trigger. Limit: 255 characters
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, NamespacePrefix is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, NamespacePrefix is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The current status of the Apex trigger. The following string values are valid: • Active—The trigger is active. • Inactive—The trigger is inactive, but not deleted. • Deleted—The trigger is marked for deletion. This is useful for managed packages, because it allows a class to be deleted when a managed package is updated.

Field	Details
	 Note: <code>Inactive</code> is not valid for ApexClass. For more information, see the Metadata API Developer Guide .
TableEnumOrId	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the object associated with the trigger, such as Account or Contact.
UsageAfterDelete	Type boolean Properties Create, Filter, Update Description Specifies whether the trigger is an <code>after delete</code> trigger (<code>true</code>) or not (<code>false</code>).
UsageAfterInsert	Type boolean Properties Create, Filter, Update Description Specifies whether the trigger is an <code>after insert</code> trigger (<code>true</code>) or not (<code>false</code>).
UsageAfterUndelete	Type boolean Properties Create, Filter, Update Description Specifies whether the trigger is an <code>after undelete</code> trigger (<code>true</code>) or not (<code>false</code>).
UsageAfterUpdate	Type boolean Properties Create, Filter, Update Description Specifies whether the trigger is an <code>after update</code> trigger (<code>true</code>) or not (<code>false</code>).
UsageBeforeDelete	Type boolean Properties Create, Filter, Update

Field	Details
	Description Specifies whether the trigger is a <code>before delete</code> trigger (<code>true</code>) or not (<code>false</code>).
UsageBeforeInsert	Type boolean Properties Create, Filter, Update Description Specifies whether the trigger is a <code>before insert</code> trigger (<code>true</code>) or not (<code>false</code>).
UsageBeforeUpdate	Type boolean Properties Create, Filter, Update Description Specifies whether the trigger is a <code>before update</code> trigger (<code>true</code>) or not (<code>false</code>).
UsageIsBulk	Type boolean Properties Create, Filter, Update Description Specifies whether the trigger is defined as a bulk trigger (<code>true</code>) or not (<code>false</code>).  Note: This field is not used for Apex triggers saved using Salesforce API version 10.0 or higher: all triggers starting with that version are automatically considered bulk, and this field will always return <code>true</code> .

Usage

Although Apex classes and triggers have the Create and Update field properties, a runtime exception occurs if you try to create, update, or delete them using the API. Instead, use the Salesforce Extensions for Visual Studio Code or the Ant Migration Tool to create or update Apex classes or triggers. Apex classes and triggers can't be created, edited, or deleted in a production org. See [Deploying Apex](#).

SEE ALSO:

[ApexClass](#)

[Developer Guide: Apex Developer Guide](#)

ApexTriggerEventLog

Apex Trigger event logs contain details about triggers that fire in an organization. This object is available in API version 55.0 and later.

 **Note:** This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
<code>BotIdentifier</code>	Type String Description The ID of the bot.
<code>BotSessionIdentifier</code>	Type String Description The bot session ID.
<code>ClientIp</code>	Type String Properties Filter, Group, Nillable, Sort Description The IP address of the client that is using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
<code>CpuTime</code>	Type Double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
<code>DatabaseTotalTime</code>	Type Double Properties Filter, Nillable, Sort

Field	Details
	Description Time (in milliseconds) spent waiting for database processing in aggregate for all operations in the request. Compare this field to <code>CpuTime</code> to determine whether performance issues are occurring in the database layer or in your own code.
ExecutionTime	Type Double Properties Filter, Nillable, Sort Description The end-to-end Apex execution time (in milliseconds).
LoginKey	Type String Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: <code>GeJCsym5eyvtEK2I</code>.
ObjectName	Type String Properties Filter, Group, Nillable, Sort Description The name of the object affected by the trigger.
PlannerIdentifier	Type String Description The ID of the agent planner.
RequestIdentifier	Type String Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: <code>GeJCsym5eyvtEK2I</code>.

Field	Details
RequestStatus	Type String Description The status of the request for a page view or user interface action. For example: • S—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned. • F—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only. • U—Undefined • A—Authorization Error • R—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page. • N—Not Found. 404 error. This field can have a blank value.
RunTime	Type Double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds. Requests with a value over five seconds are considered long-running requests for the purposes of the Concurrent Long-Running Apex Limit. HTTP callout processing time isn't included when calculating the 5-second limit. We pause the timer for the callout and resume it when the callout completes.
SessionKey	Type String Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
Timestamp	Type DateTime Properties Filter, Nillable, Sort

Field	Details
	Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
TriggerIdentifier	Type String Properties Filter, Group, Nillable, Sort Description The 15-character ID of the trigger that was fired.
TriggerName	Type String Properties Filter, Group, Nillable, Sort Description For triggers coming from managed packages, <code>TriggerName</code> includes a namespace prefix separated with a <code>.</code> character. If no namespace prefix is present, the trigger is from an unmanaged trigger. For example: <code>examplePackage.managedExampleTrigger</code>—Managed trigger from the <code>examplePackage</code> namespace <code>unmanagedExampleTrigger</code>—Unmanaged trigger
TriggerType	Type String Properties Filter, Group, Nillable, Sort Description The type of this trigger. Possible values are: - AfterInsert - AfterUpdate - BeforeInsert - BeforeUpdate
Uri	Type String Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: <code>/home/home.jsp</code> .

Field	Details
UserIdentifier	Type String Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who is using Salesforce services through the UI or the API. For example: 00530000009M943.
UserType	Type String Properties Filter, Group, Nillable, Sort Description The category of user license. Possible values are: • <code>CsnOnly</code>—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users. • <code>CspLitePortal</code>—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site. • <code>CustomerSuccess</code>—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. • <code>Guest</code>—Users whose access is limited so that your customers can view and interact with your site without logging in. • <code>PowerCustomerSuccess</code>—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy. • <code>PowerPartner</code>—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site. • <code>SelfService</code>—Users whose access is limited because they're organization customers and access the application through a self-service portal. • <code>Standard</code>—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

ApexTypeImplementor

Represents Apex classes that directly or indirectly implement an interface. Using a SOQL query, this object gets information about public or global classes and only global classes for installed managed packages. This object is available in API version 54.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Fields

Field	Details
ApexClassId	Type reference Properties Filter, Group, Sort Description The foreign key to the outer class that contains the Apex class implementing the interface. This is a relationship field. Relationship Name ApexClass Relationship Type Lookup Refers To ApexClass
ClassName	Type string Properties Filter, Group, Sort Description Apex class name that implements the interface. For an inner class that implements the interface, the outer class and inner name separated by a period.
ClassNamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix of the class that implements the interface.
DurableId	Type string Properties Filter, Group, Nillable, Sort Description A unique identifier for the interface and implementor.

Field	Details
InterfaceApexClassId	Type reference Properties Filter, Group, Nillable, Sort Description The foreign key to the outer class that contains the Apex class defining the interface. Null for built-in system interfaces, such as <code>System.Batchable</code>. This is a relationship field. Relationship Name InterfaceApexClass Relationship Type Lookup Refers To ApexClass
InterfaceName	Type string Properties Filter, Group, Sort Description The interface name for which Apex class implementation is retrieved. For an inner interface, the outer Apex class name and the inner interface name separated by a period.
InterfaceNamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix of the class that defines the interface.
IsConcrete	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the implementing class is abstract (<code>false</code>) or not (<code>true</code>).

Usage

ApexTypeImplementor considers access modifiers based on the context, such as the namespace from which the ApexTypeImplementor entity is queried. These are additional usage considerations.

- In installed managed packages, you get information about all global implementors in the org, and public implementors from the managed package itself.
- ApexTypeImplementor appropriately filters classes that are annotated with `@Deprecated`. For example it respects the package version dependency settings of a class when queried from that class.
- ApexTypeImplementor returns implementors where `ApexClass.IsValid` is set to `False` (invalid classes) in addition to when it's set to `True`. Classes that don't compile or execute can be returned. An implementor class is only guaranteed to be usable if `ApexClass.IsValid` is set to `True` for the implementor.
- If a package is installed but not yet compiled because Compile on Deploy is disabled, ApexTypeImplementor returns no values until compilation is complete. In environments like sandboxes where Compile on Deploy can be disabled, you must perform a manual compilation to get complete results.
- To avoid cross-namespace collisions, always specify an `InterfaceNamespacePrefix` as a `WHERE` clause in SOQL queries for ApexTypeImplementor. Otherwise, the query includes all namespaces instead of only the current namespace. If a package contains an interface with the same name as an interface in a different namespace, a query without a specified `InterfaceNamespacePrefix` can return false implementors that can't be assigned to the interface.

For example, say a managed package contains a global interface named `RoundingStrategy` and a global class named `HalfDown` that implements `RoundingStrategy`. If a subscriber org has an interface that's also named `RoundingStrategy`, then the query `[SELECT ApexClass.Id FROM ApexTypeImplementor WHERE InterfaceName = 'RoundingStrategy']`, if performed in the subscriber org, can return the ID of `HalfDown` instead of an implementor in the subscriber org. To avoid this issue, perform a query that specifies a `InterfaceNamespacePrefix`: `[SELECT ApexClass.Id FROM ApexTypeImplementor WHERE InterfaceName = 'RoundingStrategy' AND InterfaceNamespacePrefix = 'PackageName']`.

Example

This example demonstrates how an interface allows flexibility in a configuration, record, or user-driven selection of the rounding strategy to apply. The multiple implementations of the interface can be discovered using ApexTypeImplementor and the specific implementation chosen based on user requirements.

```
// Common interface that all rounding strategies will implement
public interface RoundingStrategy {
    Decimal round(Decimal toRound);
}

public abstract class RoundingStrategies {
    public class Ceiling implements RoundingStrategy {
        public Decimal round(Decimal toRound) {
            return toRound.round(System.RoundingMode.CEILING);
        }
    }

    public class HalfDown implements RoundingStrategy {
        public Decimal round(Decimal toRound) {
            return toRound.round(System.RoundingMode.HALF_DOWN);
        }
    }

    public class TwoDecimalPlaces implements RoundingStrategy {
        public Decimal round(Decimal toRound) {
            return toRound.setScale(2, System.RoundingMode.HALF_UP);
        }
    }
}
```

```
    }
  }
}

List<ApexTypeImplementor> interfaceImpls = [
    SELECT ClassName, ClassNamespacePrefix
    FROM ApexTypeImplementor
    WHERE InterfaceName = 'RoundingStrategy' and IsConcrete = true and
InterfaceNamespacePrefix = ''
    ORDER BY ClassName ASC NULLS LAST];

// For example, an admin can be presented with a list of Apex classes
// that can be applied. Simulated selection of 2 decimal places
ApexTypeImplementor selectedRoundingStrategy = interfaceImpls[2];
System.assertEquals('RoundingStrategies.TwoDecimalPlaces',
    selectedRoundingStrategy.ClassName);

// Create an instance of the class that implements the interface
RoundingStrategy rs = (RoundingStrategy)
Type.forName(selectedRoundingStrategy.ClassNamespacePrefix,
    selectedRoundingStrategy.ClassName).newInstance();

Decimal rounded = rs.round(7.1459);
System.assertEquals(7.15, rounded);
```

ApexUnexpectedExcpEventLog

Apex Unexpected Excp Event Log captures information about unexpected exceptions in Apex code execution. This object is available in API version 61.0 and later.

 **Note:** This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

describeSObjects(), query()

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
ExceptionCategory	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The category of the unexpected Apex exception. For example, the <code>LimitException</code> exception type is split into subcategories that indicate if you exceeded a limit, such as the total heap size or CPU time. Possible values: • Subcategories of <code>LimitException</code> that indicate the Apex limit you've exceeded. Examples: • <code>LimitException: CpuTime</code>: Maximum CPU time on the Salesforce servers. • <code>LimitException: HeapSize</code>: Total heap size • <code>LimitException: Queries</code>: Total number of SOQL queries issued. • <code>LimitException: QueryRows</code>: Total number of records retrieved by SOQL queries. • <code>LimitException: DmlStatements</code>: Total number of DML statements issued. • <code>LimitException: Callouts</code>: Total number of callouts (HTTP requests or web services calls) in a transaction.
<code>ExceptionMessage</code>	Type string Properties Filter, Nillable, Sort Description The exception message for a SOAP API request. An exception message gives details about errors in handling an API request, such as why an API request failed. For example: <code>common.exception.ApiException: startDate cannot be more than 30 days ago</code>.
<code>ExceptionType</code>	Type string Properties Filter, Group, Nillable, Sort Description The class type of the unexpected exception. For example: <code>System.MathException</code>
<code>RequestIdIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestIdIdentifier</code>. For example: <code>3nWgxWbDKWWDik0FKfF5DV</code>.
<code>StackTrace</code>	Type string Properties Filter, Nillable, Sort

Field	Details
	Description The stack trace for the exception. For example: Class.OpportunityUtility.insert: line 22, column 1 AnonymousBlock: line 1, column 1
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.

ApiTotalUsageEventLog

API Total Usage Event Log contains details about Platform SOAP API, Platform REST API, and Bulk API requests. This object is available in API version 61.0 and later.

 **Note:** This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
ApiFamily	Type string Properties Filter, Group, Nillable, Sort Description The API family. For example, REST, SOAP, or Bulk.
ApiResource	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The API method or resource. For example, <code>describeSObjects</code> for SOAP.
BotIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the bot.
BotSessionIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The bot session ID.
ClientIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP, such as a login from AppExchange, is shown as "Salesforce.com IP". For example: 96.43.144.26.
ClientName	Type string Properties Filter, Group, Nillable, Sort Description The name of the client making the API request.
ConnectedAppIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the connected app making the API request.

Field	Details
HttpMethod	Type string Properties Filter, Group, Nillable, Sort Description The HTTP method. For example, <code>GET</code>.
IsApiLimitCounted	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Whether the request counted against the API limit (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
ObjectName	Type string Properties Filter, Group, Nillable, Sort Description The name of the object accessed by the API request.
PlannerIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the agent planner.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestIdentifier</code>. For example: <code>3nWgxWbDKWWDiK0FKfF5DV</code>.
StatusCode	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The HTTP response status code for the request.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.

AppAnalyticsQueryRequest

Represents a request for AppExchange App Analytics data.

AppExchange App Analytics is available for packages that passed security review and are registered to a License Management App (LMA). Usage data is provided as package usage logs, as month-based package usage summaries, or as point-in-time subscriber snapshots. Usage logs, monthly usage summaries, and subscriber snapshots are downloadable comma-separated value (.csv) files. For information on how to optimize your use of App Analytics, see [AppExchange App Analytics Best Practices](#).

 **Note:** Usage data from [Government Cloud](#) and [Government Cloud Plus](#) orgs isn't available in App Analytics.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

See [Get Started with AppExchange App Analytics](#) in the *Second-Generation Managed Packaging Developer Guide*.

Fields

Field Name	Details
AvailableSince	Type dateTime Properties Create, Filter, Nillable, Sort Description An optional value used to limit the requested results file to data newly arrived in the data lake after the specified date and time. This field is always transferred in the Coordinated Universal Time (UTC) time zone. Use the <code>AvailableSince</code> field as part of your catch-up query strategy. <code>AvailableSince</code> must be later than <code>StartTime</code> and <code>EndTime</code>, if specified. <code>AvailableSince</code> must be earlier than now. A query must include <code>StartTime</code>, <code>AvailableSince</code>, or both. For example, to schedule a catch-up query on <code>2021-04-03T18:00:00Z</code> for this date range: • <code>StartTime=2021-03-29T00:00:00Z</code> • <code>EndTime=2021-03-30T00:00:00Z</code> Valid <code>AvailableSince</code> values range from <code>2021-03-30T00:00:00Z</code> to <code>2021-04-03T18:00:00Z</code>. For more information on <code>AvailableSince</code> and catch-up queries, read AppExchange App Analytics Best Practices.
DataType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The type of usage data being requested. Valid values include: • <code>PackageUsageLog</code> • <code>PackageUsageSummary</code> • <code>SubscriberSnapshot</code>  Note: In Summer '20, we changed the enum names from <code>CustomObjectUsageSummary</code> and <code>CustomObjectUsageLog</code> to <code>PackageUsageSummary</code> and <code>PackageUsageLog</code>. If you wrote integrations using <code>CustomObjectUsageSummary</code> or <code>CustomObjectUsageLog</code>, they continue to work only with v47 and earlier. After you upgrade to v48, you must update the <code>DataType</code> to <code>PackageUsageSummary</code> and <code>PackageUsageLog</code>.

Field Name	Details
DownloadExpirationTime	Type dateTime Properties Filter, Nillable, Sort Description The time when the download URL is no longer valid. The expiration time is 60 minutes after the query is completed.
DownloadSize	Type long Properties Filter, Group, Nillable, Sort Description The size of the AppExchange App Analytics results file available for download, in bytes.
DownloadUrl	Type textarea Properties Nillable Description URL that the user can download data from. Populated after the request is completed. This URL expires and is removed after the expiration time is reached.
EndTime	Type dateTime Properties Create, Filter, Nillable, Sort Description Enter end time in format yyyy-MM-ddTHH:mm:ss. Example: 2019-04-15T12:00:00 For Package Usage Summaries, we recommend that StartTime corresponds to midnight UTC at beginning of the desired month and EndTime corresponds to midnight UTC at the beginning of the following month. For example, to retrieve the Package Usage Summary for December 2024 specify: • StartTime=2024-12-01T00:00:00Z • EndTime=2025-01-01T00:00:00Z

Field Name	Details
ErrorMessage	Type string Properties Filter, Group, Nillable, Sort Description Stores error message text that results from this query.
FileCompression	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The file compression format of your requested results file. <code>FileCompression</code> and <code>FileType</code> must align. If <code>FileType</code> is <code>csv</code>, <code>FileCompression</code> defaults to <code>none</code> and can be <code>none</code> or <code>gzip</code>. If <code>FileType</code> is <code>parquet</code>, <code>FileCompression</code> is <code>snappy</code> by default and can be <code>snappy</code>, <code>gzip</code>, or <code>none</code>. Valid values include: • <code>gzip</code> • <code>snappy</code> • <code>none</code>
FileType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The data format of your requested results file. The default is <code>csv</code>. <code>FileCompression</code> and <code>FileType</code> must align. If <code>FileType</code> is <code>csv</code>, <code>FileCompression</code> defaults to <code>none</code> and can be <code>none</code> or <code>gzip</code>. If <code>FileType</code> is <code>parquet</code>, <code>FileCompression</code> is <code>snappy</code> by default and can be <code>snappy</code>, <code>gzip</code>, or <code>none</code>. Valid values include: • <code>csv</code> • <code>parquet</code>
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field Name	Details
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The auto-generated name of the App Analytics query request.
OrganizationIds	Type string Properties Create, Filter, Group, Nillable, Sort Description Optional. Enter up to 16 comma-separated org IDs without spaces between IDs. Or enter up to 15 comma-separated org IDs with spaces between the IDs. To request data for all the orgs the package is installed in, leave the field blank.
PackageIds	Type string Properties Create, Filter, Group, Nillable, Sort Description Optional. Enter up to 16 comma-separated package IDs without spaces between IDs. Or enter up to 15 comma-separated package IDs with spaces between the IDs. Use the subscriber package ID that begins with 033. To retrieve a list of your second-generation managed package IDs, run <code>sf package list --verbose</code> in Salesforce CLI. To request data on all packages registered to this License Management App, leave the field blank.

Field Name	Details
QuerySubmittedTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the App Analytics query request was received for processing, in Coordinated Universal Time (UTC). <code>QuerySubmittedTime</code> is read only.
RequestState	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Status of the query request. Valid values are: • New • Pending • Complete • Expired • Failed • NoData
StartTime	Type dateTime Properties Create, Filter, Nillable, Sort Description Enter start time in format yyyy-MM-ddTHH:mm:ss. All App Analytics query requests must include <code>StartTime</code> or <code>AvailableSince</code> or both. Example: 2019-04-14T12:00:00 For Package Usage Summaries, we recommend that <code>StartTime</code> corresponds to midnight UTC at beginning of the desired month and <code>EndTime</code> corresponds to midnight UTC at the beginning of the following month. For example, to retrieve the Package Usage Summary for December 2024 specify: • <code>StartTime=2024-12-01T00:00:00Z</code> • <code>EndTime=2025-01-01T00:00:00Z</code>

Usage

To request usage data, log in to the License Management Org (LMO) that your package is registered to, and initiate the API request from the LMO. In a 24-hour period, you can download a maximum 20 GB of AppExchange App Analytics data.

See [Download Package Usage Logs, Package Usage Summaries, and Subscriber Snapshots](#) in the *Second Generation Managed Packaging Developer Guide*.

If requests to view package usage log or subscriber snapshot data are inactive for 90 days, we reserve the right to stop collecting this data. To resume data collection, log a support case in the [Salesforce Partner Community](#). For product, specify **Partner Programs & Benefits**. For topic, specify **ISV Technology Request**.

AppDefinition

Represents the metadata of an app and its navigation items. Metadata is returned only for apps that the current user can access. This object is available in API version 43.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Fields

Field Name	Details
Description	Type string Properties Filter, Group, Nillable, Sort Description The optional description of the application.
DeveloperName	Type string Properties Filter, Group, Nillable, Sort Description The developer name of the application.
DurableId	Type string Properties Filter, Group, Nillable, Sort Description A unique virtual Salesforce ID for the application.

Field Name	Details
HeaderColor	Type string Properties Filter, Group, Nillable, Sort Description The header color in the application. Specify the color with a hexadecimal code, such as #0000FF for blue.
Id	Type ID Properties Defaulted on create, Filter, Group, idLookup, Sort Description A default Salesforce ID.
IsLargeFormFactorSupported	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the Large form factor is set in the CustomApplication metadata.
IsMediumFormFactorSupported	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the Medium form factor is set in the CustomApplication metadata.
IsNavAutoTempTabsDisabled	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the navigation automatically creates temporary tabs settings.
IsNavPersonalizationDisabled	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field Name	Details
	Description Indicates whether navigation personalization is disabled.
IsNavTabPersistenceDisabled	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether workspace tabs are cleared for each new console session.
IsOmniPinnedViewEnabled	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the Omni-Channel component is enabled in sidebar view. The default is false.
IsOverrideOrgTheme	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether to override the global theme for the org. When true, the color scheme and logo that the user has set are used. When false, the global theme for the org is used, even if the user has set a color scheme and logo.
IsSmallFormFactorSupported	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the Small form factor is set in the CustomApplication metadata.
Label	Type string Properties Filter, Nillable, Sort Description The localized label value corresponding to the MasterLabel field.

Field Name	Details
LogoUrl	Type url Properties Filter, Group, Nillable, Sort Description The logo URL of the application as selected by the admin.
MasterLabel	Type string Properties Filter, Group, Nillable, Sort Description The non-translated label entered when the application was created.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace of the application.
NavType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of navigation for the application. The value <code>Standard</code> is for Lightning Experience. The value <code>Console</code> is for Salesforce console. A null value is for Salesforce Classic.
UiType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the type of custom application. The value <code>Aloha</code> is for Salesforce Classic, and <code>Lightning</code> is for Lightning Experience.
UtilityBar	Type string Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description The ID of the utility bar associated with this application.

AppExtension

Represents a connection between the Field Service mobile app and another app, typically for passing record data to the Salesforce mobile app or other apps. This object is available in API version 41.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
<code>AppExtensionLabel</code>	Type string Properties Create, Filter, Group, Sort, Update Description The label in the UI for the app extension.
<code>AppExtensionName</code>	Type string Properties Create, Filter, Group, Sort, Update Description The API name of the app extension.
<code>FieldServiceMobileSettingsId</code>	Type reference Properties Create, Filter, Group, Sort Description The ID of a set of field service mobile settings.

Field Name	Details
InstallationUrl	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The URL that takes the user to the app install location, such as the App Store or Google Play.
LaunchValue	Type string Properties Create, Filter, Group, Sort, Update Description A value directing the Field Service app to the appropriate app extension. The Launch Value can be a static URL or a dynamic value that you can represent with certain tokens. These tokens pass field information from the record that the user is currently viewing. The basic format for these tokens is based on the field names; for example: {!\$Name}.
ScopedToObjectTypes	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the types of records from which the app extension can be activated. Scoping an app extension to an object lets users activate the app extension from records of the specified type. For example, to scope to both work orders and service appointments you would use the value <i>WorkOrder, ServiceAppointment</i>.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A picklist of types of app extensions: iOS, Android, Flow, and Lightning Apps

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AppExtensionChangeEvent

Change events are available for the object. Available in API version 55.0 and later.

ApplicationFormTemplate

Represents the fields to capture application metadata as a template which is used in application tracking and processing. This object is available in API version 59.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available only with the EAndU Cloud Program Access permission set.

Fields

Field	Details
ApprovalFlowName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the flow that must be launched to approve the applications associated with the application form template.
ApplicationType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the type of application or template. Possible values are: • Contractor • EVCharger—EV Charger • EnergyEfficiency—Energy Efficiency • NewConnection—New Connection The default value is <code>NewConnection</code>.

Field	Details
ApprovalLimitAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description Amount up to which the approver has the authority to approve applications.
ApprovalFlowName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the flow that must be launched to approve the applications associated with the application form template.
ApproverId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The user who must approve the application payout. This field is a relationship field. Relationship Name Approver Relationship Type Lookup Refers To User
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the application form template.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update

Field	Details
	Description The name of the application form template.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ApplicationFormTemplateChangeEvent](#)

Change events are available for the object.

[ApplicationFormTemplateFeed](#)

Feed tracking is available for the object.

[ApplicationFormTemplateHistory](#)

History is available for tracked fields of the object.

[ApplicationFormTemplateOwnerSharingRule](#)

Sharing rules are available for the object.

[ApplicationFormTemplateShare](#)

Sharing is available for the object.

AppMenuItem

Represents the organization's default settings for items in the app menu or App Launcher.

Supported Calls

`delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`

Fields

Field	Details
ApplicationId	Type reference Properties Filter, Group, Nillable, Sort Description The 15-character ID for the menu item.
CanvasAccessMethod	Type picklist

Field	Details
	Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The access method for the canvas app. Values can be: • <code>Get</code>—OAuth Webflow • <code>Post</code>—Signed Request
CanvasEnabled	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates if the app menu item is a canvas app (<code>true</code>) or not (<code>false</code>). The default setting is <code>false</code>.
CanvasOptions	Type string Properties Filter, Group, Nillable, Sort Description Represents the options enabled for a canvas connected app. The options are: • <code>PersonalEnabled</code>—The app is enabled as a canvas personal app. • <code>HideHeader</code>—The publisher header, which contains the “What are you working on?” text, is hidden. • <code>HideShare</code>—The publisher Share button is hidden. This field is available in API version 34.0 and later.
CanvasReferenceId	Type string Properties Filter, Group, Nillable, Sort Description The canvas app unique identifier.
CanvasSelectedLocations	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The selected locations for the canvas app which define where the canvas app can appear in the user interface. For example: <pre>Chatter, ChatterFeed, Publisher, ServiceDesk</pre>
CanvasUrl	Type url Properties Filter, Group, Nillable, Sort Description The URL of the canvas app.
Description	Type string Properties Filter, Group, Nillable, Sort Description A description of this menu item.
IconUrl	Type url Properties Filter, Group, Nillable, Sort Description The icon for the menu item's application.
InfoUrl	Type url Properties Filter, Group, Nillable, Sort Description The URL for more information about the application.
IsAccessible	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, the current user is authorized to use the app. The default setting is <code>false</code>.

Field	Details
IsRegisteredDeviceOnly	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, indicates that the app is available to registered devices only. The default setting is <code>false</code>. Available in API version 49.0 and later.
IsUsingAdminAuthorization	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, the app is pre-authorized for certain users by the administrator. The default setting is <code>false</code>.
IsVisible	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description If <code>true</code>, the app is visible to users of the organization. The default setting is <code>false</code>.
Label	Type string Properties Filter, Group, Nillable, Sort Description The app's name.
LogoUrl	Type url Properties Filter, Group, Nillable, Sort Description The logo for the menu item's application. The default is the initials of the <code>Label</code> value.
MobileAppBinaryId	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The URL for the Mobile App Binary file.
MobileAppInstallUrl	Type url Properties Filter, Group, Nillable, Sort Description The location mobile users are directed to install the app. Available in API version 49.0 and later.
MobileAppInstalledDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that a user installed a mobile app. Available in API version 49.0 and later.
MobileAppInstalledVersion	Type string Properties Filter, Group, Nillable, Sort Description The version of the user's installed mobile app. Available in API version 49.0 and later.
MobileAppVer	Type string Properties Filter, Group, Nillable, Sort Description The version number of the mobile app. Available in API version 49.0 and later.
MobileDeviceType	Type string Properties Filter, Group, Nillable, Sort Description The supported device form factors for the mobile app. Available in API version 49.0 and later.
MobileMinOsVer	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The minimum version required for the app. Available in API version 49.0 and later.
MobilePlatform	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The mobile platform for the app. Possible values include: • <code>android</code> - Android • <code>ios</code> - iOS Available in API version 49.0 and later.
MobileStartUrl	Type url Properties Filter, Group, Nillable, Sort Description The location mobile users are directed to after they've authenticated. This field is used with connected apps and Experience Builder sites. For sites only, this location is a fully qualified domain name. For other apps, it's a relative URL.
Name	Type string Properties Filter, Group, Nillable, Sort Description The API name of the item.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values:

Field	Details
	- In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. - In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
<code>SortOrder</code>	Type int Properties Filter, Group, Sort Description The index value that controls where this item appears in the menu. For example, a menu item with a sort order of 5 appears between items with sort order values of 3 and 9.
<code>StartUrl</code>	Type url Properties Filter, Group, Nillable, Sort Description For a connected app, the location users are directed to after they've authenticated. Otherwise, the application's default start page.
<code>Type</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of application represented by this item. The types are: <code>ConnectedApplication</code> <code>Network</code> <code>ServiceProvider</code> <code>TabSet</code>
<code>UserSortOrder</code>	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The index value that represents where the user set this item in the menu (or App Launcher). For example, an item with a sort order value of 5 appears between items with sort order values of 3 and 9. This value is separate from SortOrder so you can create logic incorporating both values. For example, if you want the user-sorted items to appear first, followed by the organization order for the rest, use: <pre>SELECT ApplicationId,SortOrder,UserSortOrder FROM AppMenuItem order by userSortOrder NULLS LAST, sortOrder NULLS LAST</pre>

Usage

Use this read-only object to view an entry in the Lightning Platform app menu or the App Launcher. You can create a SOQL query to retrieve all items, even items the user does not see from the user interface.

There are many ways you can use AppMenuItem. Here are some examples:

- Build your own App Launcher or app menu in Salesforce. Create a custom page showing all the apps you have access to and that lets you run them using single sign-on.
- Build your own App Launcher or app menu on a tablet or mobile app. You can have your own app for launching applications on various mobile devices.
- Build an app launcher into your company's intranet. There's no need to have it run on Salesforce because Salesforce APIs let you integrate with Salesforce programmatically and build an app launcher.



Tip: To get metadata information about apps and their tabs, use the Apex `Schema.describeTabs()` method, REST API `/vXX.X/tabs/` resource, or SOAP API `describeTabs()` call.

AppointmentAssignmentPolicy

Stores information about resource assignment rules. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
FullName	Type string Properties Create, Filter, Group, Sort, Update

Field	Details
	Description The API name of the AppointmentAssignmentPolicy object.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the appointment assignment policy. Possible values are: • Possible values are: • da (Danish) • de (German) • en_US (English) • es (Spanish) • es_MX (Spanish - Mexican) • fi (Finnish) • fr (French) • it (Italian) • ja (Japanese) • ko (Korean) • nl_NL (Dutch) • no (Norwegian) • pt_BR (Portuguese - Brazilian) • ru (Russian) • sv (Swedish) • th (Thai) • zh_CN (Chinese - Simplified) • zh_TW (Chinese - Traditional)
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The label for the appointment assignment policy.

Field	Details
PolicyApplicableDuration	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The frequency at which the utilization of service resources is calculated. This field is available in API version 53.0 and later. Possible values are: • Parameter-Based • Monthly • Weekly The default value is Parameter-Based.
PolicyType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of appointment assignment policy. Possible values are: • loadBalancing
UtilizationFactor	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Specifies the count type for the resource utilization. This field is available in API version 53.0 and later. Possible values are: • NumberOfAppointments • TotalAppointmentDuration The default value is TotalAppointmentDuration.

AppointmentScheduleAggr

Records the utilization of a service resource, by date, for the Load Balancing appointment assignment policy. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AppointmentDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date of the appointment.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name or ID of the AppointmentScheduleAggr object.
ResourceUtilizationCount	Type integer Properties Filter, Group, Nillable, Sort Description The number of appointments scheduled for a service resource. Available in API version 53.0 and later. This is a calculated field.
ServiceResourceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The service resource associated with the appointment scheduling aggregate. This is a relationship field. Relationship Name ServiceResource Relationship Type Lookup

Field	Details
	Refers To ServiceResource
TotalResourceUtilization	Type double Properties Filter, Nillable, Sort Description The number of minutes for which the service resource has scheduled appointments. This is a calculated field.
UsageType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Specify the usage type of the AppointmentScheduleAggr object. Possible values are: • FSL_Daily • FSL_Monthly • FSL_Weekly • LightningScheduler The default value is 'LightningScheduler'.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AppointmentScheduleAggrOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[AppointmentScheduleAggrShare](#) on page 67

Sharing is available for the object.

AppointmentScheduleLog

Stores service appointments of each service Resource. This object is used to calculate the utilization of a service resource for the AppointmentScheduleAggr object. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AppointmentDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date of the appointment.
AppointmentScheduleAggrId	Type reference Properties Create, Filter, Group, Sort Description The appointment scheduling aggregate associated with the appointment scheduling log. This is a relationship field. Relationship Name AppointmentScheduleAggr Relationship Type Lookup Refers To AppointmentScheduleAggr
IsUsedForResourceUtilization	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the appointment scheduling log is used for deriving the appointment scheduling aggregate. The default value is 'false'.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort

Field	Details
	Description The name or ID of the AppointmentScheduleLog object.
RelatedRecordId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The service appointment, resource absence, event, or any other related record associated with the appointment scheduling log. This is a polymorphic relationship field. Relationship Name RelatedRecord Relationship Type Lookup Refers To Event, ServiceAppointment
ResourceUtilization	Type double Properties Create, Filter, Nillable, Sort, Update Description The number of minutes the service resource already has scheduled appointments for.
ServiceResourceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The service resource associated with the appointment scheduling log. This is a relationship field. Relationship Name ServiceResource Relationship Type Lookup Refers To ServiceResource
UsageType	Type picklist

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Specify the product associated with the AppointmentScheduleLog object. Possible values are: • <code>FSL_Daily</code>—FSL - Daily • <code>FSL_Monthly</code>—FSL - Monthly • <code>FSL_Weekly</code>—FSL - Weekly • <code>LightningScheduler</code>—Lightning Scheduler The default value is 'LightningScheduler'.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AppointmentScheduleLogChangeEvent](#) on page 68

Change events are available for the object.

[AppointmentScheduleLogFeed](#) on page 55

Feed tracking is available for the object.

[AppointmentScheduleLogHistory](#) on page 63

History is available for tracked fields of the object.

[AppointmentScheduleLogOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[AppointmentScheduleLogShare](#) on page 67

Sharing is available for the object.

AppointmentSchedulingPolicy

Represents a set of rules for scheduling appointments using Salesforce Scheduler. This object is available in API version 45.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
<code>AppointmentAssignmentPolicyId</code>	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The name or ID of the appointment assignment policy. This is a relationship field, available in version 52.0 and later. Relationship Name AppointmentAssignmentPolicy Relationship Type Lookup Refers To AppointmentAssignmentPolicy
AppointmentStartTimeInterval	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The proposed time interval in minutes between appointment start times. For example, set the interval to 15. Appointments can then begin at the top of the hour and at 15-minute intervals thereafter (10:00 AM, 10:15 AM, 10:30 AM, and so on). Possible values are: • 5 • 10 • 15 • 20 • 30 • 45 • 60 • 90 • 120 • 150 • 180 • 240 • 300 • 360 • 420 • 480
DeveloperName	Type string

Field	Details
	Properties Create, Filter, Group, Sort, Update Description The API name of the AppointmentSchedulingPolicy object.
ExtCalEventHandlerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The API name of the custom Apex class that checks service resources' external calendar events and returns the time slots where service resources are already booked. Available in API version 50.0 and later. This is a relationship field. Relationship Name ExtCalEventHandler Relationship Type Lookup Refers To ApexClass
IsOrgDefault	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this scheduling policy is the default appointment scheduling policy for Lightning Scheduler appointments in this org.
IsSvcTerrOpHoursWithShiftsUsed	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this scheduling policy considers the intersection of shifts and service territory operating hours when determining the availability of service resources for appointments (true). The default value is false. Available in API version 56.0 and later.
IsSvcTerritoryMemberShiftUsed	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Indicates whether this scheduling policy considers shifts of service territory members when determining the availability of service resources for appointments (true). The default value is false. Available in API version 56.0 and later.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the appointment scheduling policy. Possible values are: • Possible values are: • da (Danish) • de (German) • en_US (English) • es (Spanish) • es_MX (Spanish - Mexican) • fi (Finnish) • fr (French) • it (Italian) • ja (Japanese) • ko (Korean) • nl_NL (Dutch) • no (Norwegian) • pt_BR (Portuguese - Brazilian) • ru (Russian) • sv (Swedish) • th (Thai) • zh_CN (Chinese - Simplified) • zh_TW (Chinese - Traditional)
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The label for the appointment scheduling policy.

Field	Details
ShouldConsiderCalendarEvents	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this policy checks the Salesforce calendar for resource availability. The default value is 'false'.
ShouldEnforceExcludedResource	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this appointment scheduling policy prevents excluded service resources from being assigned to appointments.
ShouldEnforceRequiredResource	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this appointment scheduling policy allows only required service resources to be assigned to appointments.
ShouldMatchSkill	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this appointment scheduling policy allows only required service resources who have certain skills to be assigned to appointments.
ShouldMatchSkillLevel	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this appointment scheduling policy allows only required service resources who have certain skills and skill levels to be assigned to appointments.
ShouldRespectVisitingHours	Type boolean

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description Indicates whether this appointment scheduling policy prevents users from scheduling appointments outside of an account's visiting hours.
ShouldUsePrimaryMembers	Type boolean
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description Indicates whether this appointment scheduling policy allows only service resources who are primary members of a service territory to be assigned to appointments.
ShouldUseSecondaryMembers	Type boolean
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description Indicates whether this appointment scheduling policy allows service resources who are secondary members of a service territory to be assigned to appointments.

AppointmentTopicTimeSlot

Represents a lookup to a work type or a work type group for a time slot This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AppointmentTopicTimeSlotKey	Type string
	Properties Create, Filter, Group, idLookup, Nillable, Sort, Update

Field	Details
	Description Non-editable validating field used to ensure no two rows have the same time slot and work type or work type group values in an instance.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name or ID of the AppointmentTopicTimeSlot object.
OperatingHoursId	Type reference Properties Filter, Group, Nillable, Sort Description The operating hours that contain the time slot. This is a relationship field. Relationship Name OperatingHours Relationship Type Lookup Refers To OperatingHours
TimeSlotId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the time slot. This is a relationship field. Relationship Name TimeSlot Relationship Type Lookup Refers To TimeSlot
WorkTypeGroupId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The work type group associated with this time slot. This is a relationship field. Relationship Name WorkTypeGroup Relationship Type Lookup Refers To WorkTypeGroup
WorkTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The work type associated with this time slot. This is a relationship field. Relationship Name WorkType Relationship Type Lookup Refers To WorkType

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AppointmentTopicTimeSlotChangeEvent](#) on page 68

Change events are available for the object.

[AppointmentTopicTimeSlotFeed](#) on page 55

Feed tracking is available for the object.

[AppointmentTopicTimeSlotHistory](#) on page 63

History is available for tracked fields of the object.

[AppointmentTopicTimeSlotOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[AppointmentTopicTimeSlotShare](#) on page 67

Sharing is available for the object.

Approval

Represents an approval request for a Contract.



Note: This object is read-only and is specific to approvals on the Contract object. It isn't equal to or involved in the approval processes represented by the ProcessInstance, which is more powerful.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
ApproveComment	Type string Properties Filter, Nillable, Sort Description Text entered by the user when they approved or rejected this approval request. Required. Limit: 4,000 characters.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
OwnerId	Type reference Properties Filter, Group, Sort Description Required. ID of the User being asked to approve or reject the approval request. Must be a valid User ID. Required.

Field	Details
<code>ParentId</code>	Type reference Properties Filter, Group, Sort Description Required. ID of the Contract associated with this approval request. Must be a valid contract ID.
<code>RequestComment</code>	Type string Properties Filter, Nillable, Sort Description Text entered by the User who created the approval request. Optional. This field can't be updated after the Approval has been created. Limit: 4,000 characters.
<code>Status</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Required. Status of this approval request. One of the following picklist values: • <code>Pending</code>—Specified only when the Approval request is created (<code>create ()</code> call) • <code>Approved</code>—Specified only when the Approval request is approved (<code>update ()</code> call) • <code>Rejected</code>—Specified when the Approval request is rejected (<code>update ()</code> call) or when it is created (<code>create ()</code> call) and immediately rejected for archival/historical purposes.

Usage

This object allows client applications to programmatically handle approval requests for a Contract. Initially, to request a Contract approval, a client application might create a new Approval request record, specifying the `ParentId`, `OwnerId` (user approving or rejecting the request), `Status` (`Pending`), and (optionally) `RequestComment` fields. Note that when a client application creates the first approval request, if the value of the Contract `Status` field is `Draft`, then the Approval `Status` for this record is automatically changed to `In Approval Process` (see `ContractStatus` for more information).

A client application might subsequently update an existing Approval request, specifying the `Status` (`Approved` or `Rejected`) and an `ApproveComment` (required); the `RequestComment` field can't be updated. Updating an Approval record (either to approve or reject) requires the client application to be logged in with “Approve Contract” permission. To update an Approval request, its `Status` must be `Pending`—a client application can't update an Approval that has already been `Approved` or `Rejected`. To re-submit an approval request for a given Contract, a client application must create a new, separate Approval record and repeat the approval process.

Once a Contract has been approved (not rejected), the Contract `LastApprovedDate` field is automatically updated, however the Contract `Status` field isn't updated, it keeps the value `InApproval`.

An approved Contract must be activated explicitly. Client applications can activate a Contract by setting the value in its `Status` field to `Activated`, or a User can activate a Contract via the Salesforce user interface.

A Contract can have multiple approval requests in various states (Pending, Approved, and Rejected). In addition, one User can have multiple approval requests associated with the same Contract.

Client applications can't explicitly delete Approval records. Approval records are deleted automatically if the parent Contract is deleted.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

ApprovalAlertContentDef

Represents the mapping that links specific user-created email templates to different notification events such as initial assignment or reassignment within an Advanced Approvals flow. This object is available in API version 66.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available in Enterprise, Professional, Unlimited, and Developer Editions where Advanced Approvals is enabled.

Fields

Field	Details
<code>ApprovalFlowApiName</code>	Type string Properties Create, Filter, Group, Sort, Update Description The API name of the approval workflow.
<code>ApprovalStepApiName</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The unique API name of the approval step.

Field	Details
EmailTemplateId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The email template that's associated with an approval step in the approval workflow. This field is a relationship field. Relationship Name EmailTemplate Refers To EmailTemplate
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the approval alert content definition.
NotificationReason	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The reason within an approval step's lifecycle that triggers the notification for which an email is sent. For example, when an approval work item is moved from one user to another, a reassignment notification email is sent to the user. Possible values are: - ApprovalCreationSuccess - ApprovalStepAssignment - ApprovalStepAssignmentToDelegate - ApprovalStepReassignment - ApprovalStepReassignmentToDelegate - ApprovalSubmissionApprovedOrRejectedStatusUpdate - ApprovalWorkItemStatusUpdate - AutoApprovalConfirmation

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object.

ApprovalAlertContentDefHistory on page 63

History is available for tracked fields of the object.

ApprovalSubmission

Represents the instance of an approval request that's submitted for a record of the related object. This object is available in API version 62.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Special Access Rules

This object is available for users with a Salesforce user license of type Salesforce in Enterprise, Performance, Unlimited, and Developer Editions.

Fields

Field	Details
<code>Comments</code>	Type textarea Properties Nillable, Update Description The comments that the user adds when they submit the request for approval.
<code>DoesSendApprovalEmail</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description Required. Indicates whether approval request emails are sent to approvers and delegates (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
<code>FlowOrchestrationInstanceId</code>	Type reference Properties Filter, Group, Nillable, Sort, Update Description The ID of the flow orchestration instance record that's associated with the approval.

Field	Details
	This field is a relationship field. Relationship Name FlowOrchestrationInstance Refers To FlowOrchestrationInstance
IsEligibleForSmartApproval	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the approval submission is eligible for smart approval (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>. This field is only available with Advanced Approvals enabled.
IsSmartApprovalRun	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this approval submission either is run in smart approval mode (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>. This field is only available with Advanced Approvals enabled.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The sequentially-generated name of the approval submission record, for example AS-000000001.
OwnerId	Type reference Properties Filter, Group, Sort, Update Description The ID of the user or the group that owns the approval submission record. This field is a polymorphic relationship field.

Field	Details
	Relationship Name Owner
	Refers To User
RelatedRecordId	Type reference
	Properties Filter, Group, Nillable, Sort, Update
	Description Required. The API name of the related record that's submitted for approval.
	Relationship Name RelatedRecord
	Refers To The objects that you have access to for approvals.
RelatedRecordObjectName	Type string
	Properties Filter, Group, Nillable, Sort, Update
	Description Required. The type of record that was submitted for approval.
SmartApprvlBasisSubmissionId	Type reference
	Properties Filter, Group, Nillable, Sort, Update
	Description The previous approval submission used as reference for the auto-approval evaluation. This field is a relationship field. This field is only available with Advanced Approvals enabled.
	Relationship Name SmartApprvlBasisSubmission
	Refers To ApprovalSubmission
Status	Type picklist
	Properties Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description Required. The status of the approval. Valid values are: • Approved • Canceled • Errored • InProgress • Recalled • Rejected • Suspended
SubmittedById	Type reference Properties Filter, Group, Nillable, Sort, Update Description Required. The ID of the user who submitted the record for approval. This field is a relationship field. Relationship Name SubmittedBy Refers To User

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ApprovalSubmissionShare on page 67

Sharing is available for the object.

ApprovalSubmissionHistory on page 63

History is available for tracked fields of the object.

ApprovalSubmissionDetail

ApprovalSubmissionDetail contains additional information about operations happening during the approval lifecycle. It will not hold any information that's already captured in the existing ApprovalSubmission and ApprovalWorkItem entities. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Special Access Rules

This object is available in Enterprise, Performance, Unlimited, and Developer Editions for users with access to the Approval Submission object.

Fields

Field	Details
ActionChannelName	Type picklist Properties Filter, Group, Restricted picklist, Sort, Update Description The name of the channel where the action was performed. Valid values are: - ApprovalRecord - Email - InvocableAction - ScreenFlow - Slack - System
ActionContext	Type string Properties Filter, Group, Nillable, Sort, Update Description The context of the action taken for the item assigned for approval. For example, if the approval has been reassigned the string would be Reassigned from User Id - <original_assignee_id>.
ActionName	Type picklist Properties Filter, Group, Restricted picklist, Sort, Update Description The action taken for the item assigned for approval. Valid values are:

Field	Details
	• Cancel • Override • Reassign • Recall • Review
ActionPerformedById	Type reference Properties Filter, Group, Nillable, Sort, Update Description The ID of the user who performed the action on the item submitted for approval. This field is a relationship field. Relationship Name ActionPerformedBy Refers To User
ActionPerformerRole	Type picklist Properties Filter, Group, Restricted picklist, Sort, Update Description The role of the user who performed the action on the item submitted for approval. Valid values are: • Admin • Assignee • Delegate • Submitter • System
ApprovalSubmissionId	Type reference Properties Filter, Group, Sort Description The approval submission that's associated with the detail record. This field is a relationship field. Relationship Name ApprovalSubmission

Field	Details
	Relationship Type Master-detail Refers To ApprovalSubmission (the master object)
ApprovalWorkItemId	Type reference Properties Filter, Group, Nillable, Sort Description The approval assignment associated with the detail record. This field is a relationship field. Relationship Name ApprovalWorkItem Refers To ApprovalWorkItem
Comments	Type textarea Properties Nillable, Update Description The comments that the user adds when they cancel, review, reassign or recall the request.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The sequentially-generated name of the approval submission detail record, for example ASD-000000026.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ApprovalSubmissionDetailHistory](#) on page 63

History is available for tracked fields of the object.

ApprovalWorkItem

Contains run-time information about each step in an approval workflow, such as assignees and their decisions regarding the object's approval. Has a master-detail relationship with ApprovalSubmission. This object is available in API version 61.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Special Access Rules

This object is available in Enterprise, Performance, Unlimited, and Developer Editions for users with access to the Approval Submission object.

Fields

Field	Details
ApprovalChainName	Type string Properties Filter, Group, Nillable, Sort, Update Description The name of the related approval chain. This field is populated when there are multiple approval chains that are run in parallel. This field is only available with Advanced Approvals enabled.
ApprovalConditionName	Type string Properties Filter, Group, Nillable, Sort, Update Description The name of the condition that assigns the work item to a user or group for approval.
ApprovalSubmissionId	Type reference Properties Filter, Group, Sort Description The approval submission that's associated with this item. This field is a relationship field. Relationship Name ApprovalSubmission

Field	Details
	Relationship Type Master-detail Refers To ApprovalSubmission (the master object)
AssignedToId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The user, group, or queue that was assigned the work item. This field is a polymorphic relationship field. Relationship Name AssignedTo Refers To Group (Type = Regular), Group (Type = Queue), User
Comments	Type textarea Properties Nillable, Update Description The comments that the user adds when they review or override the work item.
FlowOrchestrationWorkItemId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The identifier of the associated flow orchestration work item. This field is a relationship field. Relationship Name FlowOrchestrationWorkItem Refers To FlowOrchestrationWorkItem
IsAutoReviewed	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Indicates whether the work item was auto-reviewed (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>. This field is only available with Advanced Approvals enabled.
IsEligibleForAutoApproval	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description Indicates whether custom logic is used for auto-approval of this approval work item (<code>true</code>) or not (<code>false</code>). This field is only available with Advanced Approvals enabled.
IsEligibleForSmartApproval	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the approval work item is eligible for smart approval (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>. This field is only available with Advanced Approvals enabled.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The sequentially-generated name of the related record that's submitted for approval, for example AWI-000000001.
RelatedRecordId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The API name of the related record that's submitted for approval. Relationship Name RelatedRecord

Field	Details
	Refers To The objects that you have access to for approvals.
RelatedRecordObjectName	Type string Properties Filter, Group, Nillable, Sort, Update Description The name of the related record that's submitted for approval.
ReviewedById	Type reference Properties Filter, Group, Nillable, Sort, Update Description The identifier of the user that reviewed the work item. This field is a relationship field. Relationship Name ReviewedBy Refers To User
ReviewedDate	Type dateTime Properties Filter, Nillable, Sort, Update Description The date and time when the work item was reviewed.
SmartApprovalBasisWorkItemId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The previous approval work item used as a reference for the auto-approval evaluation. This field is a relationship field. This field is only available with Advanced Approvals enabled. Relationship Name SmartApprovalBasisWorkItem Refers To ApprovalWorkItem

Field	Details
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort, Update Description The status of the approval work item. Possible values are: • Approved • Assigned • Canceled • Errored—Error • Recalled • Rejected • Withdrawn

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ApprovalWorkItemHistory](#) on page 63

History is available for tracked fields of the object.

ApprovalWorkItemCondition

Represents a condition for starting and concluding an approval step that's evaluated as part of the smart approval process. This object is available in API version 64.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Special Access Rules

This object is available in Enterprise, Professional, Unlimited, and Developer Editions where Advanced Approvals is enabled with the Modify All Data or the Approval Admin user permission.

Fields

Field	Details
ApprovalWorkItemCriteriaId	Type reference Properties Filter, Group, Sort Description The approval work item criteria associated with the approval work item condition. The approval work item criteria defines the logic by which the approval conditions are evaluated. This field is a relationship field. Relationship Name ApprovalWorkItemCriteria Relationship Type Master-detail Refers To ApprovalWorkItemCriteria (the master object)
ConditionSequencePosition	Type int Properties Filter, Group, Nillable, Sort, Update Description The order in which the condition is evaluated relative to other conditions that are part of the requirement logic.
HasEvaluationSucceeded	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the first value (left side) evaluates against the second value (right side) successfully (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
IsConditionExcluded	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the condition must be excluded from evaluation (<code>true</code>) or not (<code>false</code>) in an auto-approval process.

Field	Details
	The default value is <code>false</code> .
LeftValue	Type textarea Properties Nillable, Update Description The first value of the condition that's evaluated against the second value.
LeftValueDataType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort, Update Description The data type of the first operand (left side) in this condition. Possible values are: • Apex • Boolean • Currency • Date • DateTime—Date/Time • MultiSelectPicklist—Multi-Select Picklist • Number • Other • Picklist • Text • Time
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The sequentially-generated name of the approval work item condition record, for example AWCO-000000071.
OperatorType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description The operator for the condition. Possible values are: • Contains • EndsWith • Equal • GreaterThan • GreaterThanOrEqualTo • HasError • In • IsBlank • IsChanged • IsEmpty • IsNull • LessThan • LessThanOrEqualTo • None • NotEqualTo • NotIn • StartsWith • WasSelected • WasSet • WasVisited
RightValue	Type textarea Properties Nillable, Update Description The second value (right side) of the condition that's evaluated against the first value.
RightValueDataType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort, Update Description The data type of the second operand for the condition. Possible values are: • Apex

Field	Details
	• Boolean • Currency • Date • DateTime—Date/Time • MultiSelectPicklist—Multi-Select Picklist • Number • Other • Picklist • Text • Time

ApprovalWorkItemCriteria

Represents the logic by which a smart approval request is evaluated. This object is available in API version 64.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Special Access Rules

This object is available in Enterprise, Professional, Unlimited, and Developer Editions where Advanced Approvals is enabled with the Modify All Data or the Approval Admin user permission.

Fields

Field	Details
ApprovalStepApiName	Type string Properties Filter, Group, Sort, Update Description The unique API name of the approval step that uses the logic in the approval work item criteria.
ApprovalWorkItemId	Type reference Properties Filter, Group, Sort

Field	Details
	Description The parent approval work item associated with the approval work item criteria. This field is a relationship field. Relationship Name ApprovalWorkItem Relationship Type Master-detail Refers To ApprovalWorkItem (the master object)
CriteriaType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies whether the requirement logic is for an entry or exit condition. Possible values are: • Entry • Exit
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The sequentially-generated name of the approval work item criteria record, for example AWCR-000000071.
RequirementLogic	Type string Properties Filter, Group, Nillable, Sort, Update Description The requirement logic of all entry or exit conditions.

AppTabMember

Represents the list of tabs for each of the available apps. This object is available in API version 43.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Fields

Field Name	Details
<code>AppDefinitionId</code>	Type string Properties Filter, Nillable, Sort Description The ID of the <code>AppDefinition</code> object. This is a relationship field. Relationship Name AppDefinition Relationship Type Lookup Refers To AppDefinition
<code>DurableId</code>	Type string Properties Filter, Group, Nillable, Sort Description A unique virtual Salesforce ID for the color.
<code>SortOrder</code>	Type int Properties Filter, Group, Nillable, Sort Description The number used to sort this tab in the application.
<code>TabDefinitionId</code>	Type string Properties Filter, Nillable, Sort Description The ID of the <code>TabDefinition</code> object.

Field Name	Details
	This is a relationship field. Relationship Name TabDefinition Relationship Type Lookup Refers To TabDefinition
WorkspaceDriverField	Type string Properties Filter, Group, Nillable, Sort Description Refers to the workspace mapping in the CustomApplication Metadata API object.

ApptBundleAggrDurDnscale

Sums the duration of the bundle members, reduced by a predefined percentage. This object is available in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- Field Service must be enabled.
- Bundling must be enabled in the Field Service Settings.
- The Field Service Admin, Field Service Bundle for Dispatcher, and Field Service Integration permission sets must be enabled.

Fields

Field	Details
BundleAggregationPolicyId	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description The ID of the parent appointment bundle aggregation policy. This is a relationship field. Relationship Name BundleAggregationPolicy Relationship Type Lookup Refers To ApptBundleAggrPolicy
FromBundleMemberNumber	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The number of the first bundle member to which the downscale is applied.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
MaxReduction	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The maximum reduction that can be applied to a bundle member.

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the appointment bundle aggregation downscale policy.
PercentageOfReduction	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The percentage of duration reduction.
ToBundleMemberNumber	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of the last bundle member to which the downscale is applied.

ApptBundleAggrPolicy

Policy that defines how the property values of the bundle members are aggregated and assigned to the bundle. This object is available in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- Field Service must be enabled.
- Bundling must be enabled in the Field Service Settings.
- The Field Service Admin, Field Service Bundle for Dispatcher, and Field Service Integration permission sets must be enabled.

Fields

Field	Details
AggregationAction	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The aggregation action to be performed. Possible values are: All default and custom Service Appointment fields.
AggregationFieldType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The target field type in the bundle to which the aggregation is directed. Possible values are: • Boolean • Date • Numeric • Picklist • Picklist-Multi • Skills • String
AggregationOrder	Type int Properties Create, Defaulted on create, Filter, Group, idLookup, Nillable, Sort, Update Description The order the aggregation is triggered.
BundleFieldName	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Name of the target field in the bundle where the value is taken from the bundle member. Possible values are: All default and custom Service Appointment fields.

Field	Details
BundleMemberAddiFieldName	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Name of an additional source field that is connected to the initial source field in the bundle member from which the value is taken. Possible values are: All default and custom Service Appointment fields.
BundleMemberFieldName	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Name of the source field in the bundle member from which the value is taken. Possible values are: All default and custom Service Appointment fields.
BundlePolicyId	Type reference Properties Create, Filter, Group, Sort Description ID of the parent bundle policy. This is a relationship field. Relationship Name BundlePolicy Relationship Type Lookup Refers To ApptBundlePolicy
ConstantValue	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The constant value that is used in the aggregation.
DateValue	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Represents how the date value will be determined. Possible values are: • End of Day • Now • Null • Start of Day
DoesAllowDuplicateStrings	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if you want to allow the same string to appear more than once when using the 'Sum based on Bundle Members' action type.
DownscaleSortDirection	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Applies only if the Set Downscaled Duration action is set. The downscaling sorting direction of the bundle member service appointments, according to their duration. Possible values are: • Ascending • Descending
FilterCriteriaId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The active recordset filter criteria used for aggregating the bundle members. This is a relationship field. Relationship Name FilterCriteria Relationship Type Lookup

Field	Details
	Refers To RecordsetFilterCriteria
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
MaxBundleDuration	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The maximum bundle duration that can be accumulated from the bundle members (after downscaling).
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the appointment bundle aggregation policy.
ShouldUpdateOnCreationOnly	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if you want to update the field in the bundle only when it is created.

ApptBundleConfig

Represents the general parameters that define the behavior of the bundle. This object is available in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- Field Service must be enabled.
- Bundling must be enabled in the Field Service Settings.
- The Field Service Admin, Field Service Bundle for Dispatcher, and Field Service Integration permission sets must be enabled.

Fields

Field	Details
AddToBundleStatuses	Type multipicklist Properties Create, Defaulted on create, Filter, Nillable, Update Description The statuses of service appointment that are allowed to be bundled. Possible values are: • Accepted • Canceled • Cannot Complete • Completed • Dispatched • In Progress • None • Rejected • Scheduled The default value is None.
BundleStatusesToPropagate	Type multipicklist Properties Create, Defaulted on create, Filter, Nillable, Update

Field	Details
	Description The bundle statuses that when updated are inherited by the bundle members. Possible values are: - Accepted - Canceled - Cannot Complete - Completed - Dispatched - In Progress - None - Rejected - Scheduled The default value is None.
CriteriaForAutoUnbundlingId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The criteria that causes a bundle service appointment to be unbundled. This is a relationship field. Relationship Name CriteriaForAutoUnbundling Relationship Type Lookup Refers To RecordsetFilterCriteria
DoesAddTravelTime	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If the bundle members aren't in the same location, add travel time between them to the bundle's duration according to their sort order. The default value is false.
DoesDeleteEmptyBundles	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description If the bundle has no remaining bundle members, the bundle is deleted.
EmptyBundleStatus	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The status from the Canceled category that a bundle service appointment changes to if it has no remaining bundle members, but still appears in the appointment list. Possible values are determined by the org's statuses. The default value is None.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
MemberStatusesNotToPropagate	Type multipicklist Properties Create, Defaulted on create, Filter, Nillable, Update Description The bundle member statuses that aren't overridden when the bundle's status is updated. Possible values are: - Accepted - Canceled - Cannot Complete - Completed

Field	Details
	• Dispatched • In Progress • None • Rejected • Scheduled The default value is None.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the Appointment Bundle Config.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of this object. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
RemoveFromBundleStatuses	Type multipicklist Properties Create, Defaulted on create, Filter, Nillable, Update Description The statuses of service appointments that are allowed to be removed from a bundle. Possible values are: • Accepted • Canceled • Cannot Complete • Completed • Dispatched

Field	Details
	• In Progress • None • Rejected • Scheduled The default value is None.
StatusOnRemovalFromBundle	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The status that a service appointment is given when it's removed from a bundle. Possible values are: • Accepted • Canceled • Cannot Complete • Completed • Dispatched • In Progress • None • Rejected • Scheduled The default value is None.
StatusesNotToUpdateOnUnbundle	Type multipicklist Properties Create, Defaulted on create, Filter, Nillable, Update Description The statuses that aren't updated when a bundle is unbundled. Possible values are: • Accepted • Canceled • Cannot Complete • Completed • Dispatched • In Progress • None • Rejected

Field	Details
	Scheduled The default value is None.

ApptBundlePolicy

Policy that defines how the bundling of service appointments should be handled. This object is available in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- Field Service must be enabled.
- Bundling must be enabled in the Field Service Settings.
- The Field Service Admin, Field Service Bundle for Dispatcher, and Field Service Integration permission sets must be enabled.

Fields

Field	Details
BundleEndTimeFieldName	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description If IsTimeCalcByBundleDurationField is true, this field represents the name of the field used for entering the end time of the bundle.
BundleStartTimeFieldName	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description If IsTimeCalcByBundleDurationField is true, this field represents the name of the field used for entering the start time of the bundle.
CanAllowSchleDepndInBundle	Type boolean

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description This field is reserved for future use.
ConstantTimeValue	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description If IsTimeCalcByBundleDurationField is true, this field represents the total time of the bundle as a preset constant value.
FilterCriteriaId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The active recordset filter criteria used for the bundle members. Only service appointments that meet the criteria can be bundled. This is a relationship field. Relationship Name FilterCriteria Relationship Type Lookup Refers To RecordsetFilterCriteria
IsAutomaticBundling	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if the policy is relevant for automatic bundling.
IsManualBundling	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if the policy is relevant for manual bundling.

Field	Details
	The default value is 'false'.
IsTimeCalcByBundleDurationFld	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if the bundle's duration is validated. If true, the bundle's start time is subtracted from the bundle's end time. If the result is a negative value, it uses ConstantTimeValue as the bundle's duration. The default value is 'false'.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
LimitAmountOfBundleMembers	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The maximum number of bundle members that can be included in a bundle.
LimitDurationOfBundle	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The maximum duration of a bundle.

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the bundle policy.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of this object. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
Priority	Type int Properties Create, Filter, Group, idLookup, Sort, Update Description The priority level that this bundle policy should be given when the bundle policies are analyzed using the automatic mode.

ApptBundlePolicySvcTerr

Represents a link between the BundlePolicy and the ServiceTerritory. This object is available in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- Field Service must be enabled.
- Bundling must be enabled in the Field Service Settings.
- The Field Service Admin, Field Service Bundle for Dispatcher, and Field Service Integration permission sets must be enabled.

Fields

Field	Details
BundlePolicyId	Type reference Properties Create, Filter, Group, Sort Description The ID of the parent bundle policy. This is a relationship field. Relationship Name BundlePolicy Relationship Type Lookup Refers To ApptBundlePolicy
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
Name	Type string

Field	Details
	Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the appointment bundle service territory.
ServiceTerritoryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the service territory. This is a relationship field. Relationship Name ServiceTerritory Relationship Type Lookup Refers To ServiceTerritory

ApptBundlePropagatePolicy

Policy that defines which property values are inherited from the bundle to the bundle members or are assigned as constant values in the bundle members. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- Field Service must be enabled.
- Bundling must be enabled in the Field Service Settings.
- The Field Service Admin, Field Service Bundle for Dispatcher, and Field Service Integration permission sets must be enabled.

Fields

Field	Details
AdditionalConstantValue	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The additional constant value that is connected to the initial constant value to be added to the bundle members.
BundleFieldName	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Name of the source field in the bundle from which the value is taken. Possible values are: All default and custom Service Appointment fields.
BundleMemberFieldName	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Name of the target field in the bundle member where the value is inherited from the bundle. Possible values are: All default and custom Service Appointment fields.
BundlePolicyId	Type reference Properties Create, Filter, Group, Sort Description ID of the parent bundle policy. This field is a relationship field. Relationship Name BundlePolicy Relationship Type Lookup Refers To ApptBundlePolicy

Field	Details
ConstantValue	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The constant value to be added to the bundle members.
DateValue	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Represents how the date value is determined. Possible values are: • End of Day • Now • Null • Start of Day
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update

Field	Details
	Description The name of the appointment bundle propagation policy.
ShouldAddConstantValue	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if you want to enable adding a constant value to the bundle members.
ShouldUpdateOnAdd	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if you want to enable updating the fields of the bundle members when they are added to the bundle.
ShouldUpdateOnRemove	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if you want to enable updating the fields of the bundle members when they are removed from the bundle.
ShouldUpdateOnUnbundle	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if you want to enable updating the fields of the bundle members when performing the Unbundle action.

ApptBundleRestrictPolicy

Policy that defines the restrictions that are considered while forming a bundle. This object is available in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- Field Service must be enabled.
- Bundling must be enabled in the Field Service Settings.
- The Field Service Admin, Field Service Bundle for Dispatcher, and Field Service Integration permission sets must be enabled.

Fields

Field	Details
<code>BundlePolicyId</code>	Type reference Properties Create, Filter, Group, Sort Description ID of the parent bundle policy. This is a relationship field. Relationship Name BundlePolicy Relationship Type Lookup Refers To ApptBundlePolicy
<code>DoesAllowEmpty</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Allows a bundle member service appointment with an empty Restriction Field Name to be bundled.
<code>DoesRestrictAutomaticMode</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if you want to apply this restriction when using the automatic mode.

Field	Details
DoesRestrictManualMode	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if you want to apply this restriction when using the manual mode.
IsRestrictByDateOnly	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if you want the bundle to be restricted according to the calendar date only, ignoring the time of day.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the appointment bundle restriction policy.
RestrictionFieldName	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description Name of the field in the service appointment used for applying the restriction. Possible values are: All default and custom Service Appointment fields.

ApptBundleSortPolicy

Policy that defines the properties by which the bundle members are sorted within the bundle. Can also be used in the automatic mode for determining the order of the automatic selection of bundle members. This object is available in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- Field Service must be enabled.
- Bundling must be enabled in the Field Service Settings.
- The Field Service Admin, Field Service Bundle for Dispatcher, and Field Service Integration permission sets must be enabled.

Fields

Field	Details
BundlePolicyId	Type reference
	Properties Create, Filter, Group, Sort
	Description The ID of the parent bundle policy. This is a relationship field.
	Relationship Name BundlePolicy
	Relationship Type Lookup
	Refers To ApptBundlePolicy

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the appointment bundle sort policy.
SortDirection	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The order of the appointments in a bundle Possible values are: • Ascending • Descending
SortFieldName	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Name of the field in the service appointment used for sorting the bundle members. Possible values are: All default and custom Service Appointment fields.

Field	Details
SortOrder	Type int Properties Create, Defaulted on create, Filter, Group, idLookup, Nillable, Sort, Update Description The order of fields used for sorting the bundle members.
SortType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The applied sort type for arranging the bundle. Sort for Automatic Bundling defines the order that automated bundling uses to examine the candidate service appointments to be bundled. Sort Within a Bundle defines the order of bundle members. It's also used when you unbundle to define the order that the service appointments are scheduled on the Gantt. Possible values are: - SortForAutomaticBundling—Sort For Automatic Bundling - SortWithinABundle—Sort Within a Bundle

AppUsageAssignment

Provides application context for a record. A record can have different allowed actions or different related objects when it's created for different applications. For example, a Revenue Lifecycle Management order has a related `RevenueLifecycleManagementAppUsageAssignment`, so Salesforce knows it can create assets for that order. Available in API version 50.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AppUsageType	Type string Properties Create, Filter, Group, Sort

Field	Details
	Description The application context for the record. Allowed values are determined by the available licenses. For example, the <code>RevenueLifecycleManagement</code> and <code>BuyNow</code> <code>AppUsageTypes</code> are available with the Subscription Management license.
Name	Type string Properties Filter, Group, idLookup, Sort Description Autogenerated name for the <code>AppUsageAssignment</code>.
RecordId	Type reference Properties Create, Filter, Group, Sort Description The record that the <code>AppUsageAssignment</code> provides context for. For example, the order record. This is a relationship field. Relationship Name Record Relationship Type Lookup Refers To • Order in API version 58.0 and later • Asset, Contract, Quote in API version 59.0 and later • WebCart in API version 60.0 and later • OrderSummary in API version 61.0 and later

ArchiveActivity

Represents metadata retrieved for a single Archive process initiated by an action. Retrieved metadata can include status tracking, start and end times, record counts, and monitoring and auditing outcomes. This object is available in API version 65.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

This object is Read-Only and can't be deleted. Storage consumed by this object doesn't count toward your org's data storage limits.

Fields

Field	Details
ArchivePolicyId	Type reference Properties Filter, Group, Sort Description ID of the associated policy that triggered the process. Links each execution back to its configuration.
AttemptedRootRecordsCount	Type int Properties Filter, Sort Description The number of root records that the action tried to process. Excludes records that were filtered out before processing began.
EndTime	Type dateTime Properties Filter, Sort Description The date and time that the process executed successfully, or was terminated due to error.
FailedCount	Type int Properties Filter, Sort Description The number of records that failed to process due to errors such as validation failures, missing references, or system exceptions.
FailureReason	Type string Properties Filter, Group, Sort

Field	Details
	Description Description of why process failed or only partially completed. Can include system error messages or policy-level failures.
Name	Type string Properties Filter, Group, Sort Description The autogenerated name of the action instance.
ProgressPercentage	Type double Properties Filter, Sort Description The percentage of records that were successfully processed.
RecordsSizeInMb	Type double Properties Filter, Sort Description Estimated total size, in megabytes (MB), of the records processed during an action, including metadata and payload.
SkippedRootRecordsCount	Type int Properties Filter, Sort Description The number of root records skipped due to validation errors, exclusion filters, or data protection thresholds.
StartTime	Type dateTime Properties Filter, Sort Description The date and time that the action started.

Field	Details
Status	Type picklist Properties Filter, Group, Sort Description Status of the current activity. Valid values are: • Aborted—Policy manually aborted during policy run. • Aborting—Aborted process has started. • Archive Timeout—Process automatically stopped because it took too long to execute a specific task, or the entire run. • Completed—Process completed successfully, and all records were processed. • Ended with Delete Failures—Process finished its run, but failed to delete one or more designated items. • Ended With Errors—Process finished successfully, but some records weren't processed. A CSV of the failed records can be downloaded from the Execution Details page. • Failed—Process failed, and no records were archived. A CSV of the failed records is available on the Activities tab. • No Records—Process ran successfully but found no records matching the policy criteria. • Pending—Process is in a queue waiting to be executed. • Process Exceeds 23h—Activity started and ran successfully until it reached a time limit. When a policy is set to run daily, this status indicates partial success before exceeding the time limit. • Process Exceeds 120h—Activity started and ran successfully until it reached a time limit. When a policy is set to run one time in a five-day period, this status indicates partial success before exceeding the time limit. • Process Exceeds 168h—Activity started and ran successfully until it reached a time limit. When a policy is set to run weekly, this status indicates partial success before exceeding the time limit. • Query Timeout—Process stopped because database query took too long to execute. • Running—Process is actively executing its tasks. • Started—Process has been initiated and is currently in progress. • Too Many Failures—Process was abandoned after too many records failed to read or delete.
SucceededCount	Type int Properties Filter, Sort Description The number of records processed successfully.

Field	Details
TotalRecordCount	Type int Properties Filter, Sort Description The total number of records initially selected for processing, including successful, failed, and skipped records.
Type	Type picklist Properties Filter, Group, Sort Description Specifies the type of archive process to be executed. This static enum categorizes the purpose or mode of the run. Valid values are: • Analyzer • Archive • Archive-fail-to-delete • Estimate • Export • Export-and-download • Export-to-external-bucket • Import-data-archive • Import-data-load • Index-request • None • Purge • Purge-by-retention • Purge-estimation • RTBF-SDK • Unarchive • Unarchive-retry • Unarchive-sdk

ArchivePolicyDefinition

Represents a data lifecycle policy that, in each row, defines the scope, frequency, and rules for automated archiving or purging of records from a root entity, such as Contact or Lead. This object is available in API version 65.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Create, Update, and Delete operations are restricted to the Archive Admin profile. All other profiles have Read-Only access.

Fields

Field	Details
DataProtectionThreshold	Type int Properties Create, Filter, Sort, Update Description Specifies a retention buffer, in days, during which recently updated or sensitive records must not be archived or deleted. Enforces data protection compliance.
Description	Type textarea Properties Create, Update Description The purpose or scope of the policy.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the policy is active and eligible for execution. Only active policies can be executed by scheduled or manual processes.
Name	Type string Properties Create, Filter, Group, Sort, Update

Field	Details
	Description The unique name assigned to the policy.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Process type that the policy executes. Valid values are: • Archive • Import • Purge
Query	Type string Properties Create, Filter, Group, Sort, Update Description A complete SOQL or custom query defining the set of records to archive or purge, based on policy rules. Determines which records are eligible for processing.
QueryLimit	Type int Properties Create, Filter, Sort, Update Description The maximum number of root records this policy can process in a single run. Used to throttle execution for scalability and control.
RootEntityName	Type string Properties Create, Filter, Group, Sort, Update Description The API name of the Salesforce object targeted by the policy. Determines which object's records are queried and processed.
RunFrequency	Type picklist

Field	Details
	Properties Create, Filter, Group, Restricted picklist, Sort, Update
	Description Specifies how often the policy is executed—manually or on a regular interval. Enables automation for recurring data lifecycle operations. Valid values are: • None This option is specifically for manual policy runs. • Daily • Weekly • Monthly

Article Type __DataCategorySelection __DataCategorySelection

A data category selection represents a data category that classifies an article. This object is available in API version 19.0 and later.

This object can be used to associate an article with data categories from a data category group or to query the category selections for an article.

The object name is variable and has a syntax of *Article Type*__DataCategorySelection, where *Article Type* is the Object Name for the article type associated with the article. For example, Offer__DataCategorySelection represents the association between the Offer article type and its data categories. Every article is associated with an article type.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `getDeleted()`, `retrieve()`

Special Access Rules

Knowledge must be enabled in your org. Not available in Lightning Knowledge. Users can only access, create or delete data category selection visible to their role, permission set, or profile. If a user has partial visibility on an article's categorization, only the visible categories are returned.

Fields

Field Name	Details
DataCategoryGroupName	Type DataCategoryGroupReference
	Properties Create

Field Name	Details
	Description Unique name of the data category group which has categories associated with the article.
DataCategoryName	Type DataCategoryGroupReference Properties Create Description Unique name of the data category associated with the article.
ParentId	Type reference Properties Create, Filter Description ID of the article associated with the data category selection.

Usage

Every article in Salesforce Knowledge can be categorized. A data category selection represents a category that has been selected to classify an article. You can use the *Article Type__DataCategorySelection* object to query and manage article categorization in your org. Client applications can create a categorization for an article with a Draft status. They can also delete and query article categorizations.



Note: When using *Article Type__DataCategorySelection* to classify an article, you can't select both a category (for example USA) and one of its descendants (California) or ascendant categories (North America). In this case, only the first category is selected.

Answers zones use *QuestionDataCategorySelection* to classify questions.

SOQL Sample

The following SOQL query returns the data category selections used to classify the article whose ID is `ka0D000000005ApIAI`.

```
SELECT Id,DataCategoryName, ParentId
FROM Offer__DataCategorySelection WHERE ParentId='ka0D000000005ApIAI'
```

This clause only returns category unique names. To retrieve category labels use the following clause:

```
SELECT Id,toLabel(DataCategoryName), ParentId
FROM Offer__DataCategorySelection WHERE ParentId='ka0D000000005ApIAI'
```



Tip: You can also use relationship queries to retrieve categorizations from an article type.

SEE ALSO:

[QuestionDataCategorySelection](#)

Asset

Represents an item of commercial value, such as a product sold by your company or a competitor, that a customer has purchased.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description (Required) ID of the Account associated with this asset. Must be a valid account ID. Required if <code>ContactId</code> isn't specified. This field is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
Address	Type address Properties Filter, Nillable Description Represents the physical address or geolocation of the asset.
AssetLevel	Type int Properties Filter, Group, Nillable, Sort Description The asset's position in an asset hierarchy. If the asset has no parent or child assets, its level is 1. Assets that belong to a hierarchy have a level of 1 for the root asset, 2 for the child assets of the root asset, 3 for their children, and so forth. On assets created before the introduction

Field	Details
	of this field, the asset level defaults to –1. After the asset record is updated, the asset level is calculated and automatically updated.
AssetProvidedById	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The account that provided the asset, typically a manufacturer. This field is a relationship field. Relationship Name AssetProvidedBy Relationship Type Lookup Refers To Account
AssetServicedById	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The account in charge of servicing the asset. This field is a relationship field. Relationship Name AssetServicedBy Relationship Type Lookup Refers To Account
AssetTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The asset type associated with the asset. This field is a relationship field. This field is available in API version 62.0 and later for users with the Health Cloud Appointment Management permission set.

Field	Details
	Relationship Name AssetType Relationship Type Lookup Refers To AssetType
Availability	Type percent Properties Filter, Nillable, Sort Description The percentage of expected uptime where the asset was available for use.
Averagetimetorepair	Type double Properties Create, Filter, Nillable, Sort, Update Description Represents the number of hours it typically takes to repair an asset after a failure.
Averagetimebetweenfailure	Type double Properties Create, Filter, Nillable, Sort, Update Description Represents the number of hours that typically elapses before the asset is likely to fail again.
AverageUptimePerDay	Type double Properties Create, Filter, Nillable, Sort, Update Description The average number of hours per day the asset is expected to be available for use.
City	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The city detail for the address.

Field	Details
ConsequenceOfFailure	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The business impact associated with the asset's failure. Using this field, you can address the asset's health and take action using Flows. To enable this field, use Object Manager to update the field availability. Make sure that the field is visible for field-level security and for page layout. To learn more, see What Determines Field Access. The picklist values aren't predefined in orgs created before Winter '22 that aren't Field Service enabled. This field is available in API version 53.0 and later. Possible values are: • Insignificant • Minor • Moderate • Major • Critical
ContactId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Required if <code>AccountId</code> isn't specified. ID of the Contact associated with this asset. Must be a valid contact ID that has an account parent (but doesn't need to match the asset's <code>AccountId</code>). This field is a relationship field. Relationship Name Contact Relationship Type Lookup Refers To Contact
Country	Type String Properties Create, Filter, Group, Nillable, Sort, Update Description The country detail for the address.

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Three-letter ISO 4217 currency code associated with the invoice. The default value is USD. This field is available in API version 55.0 and later. This field is available when CPQ Plus, Salesforce Billing, or Revenue Cloud is enabled.
CurrentAmount	Type currency Properties Filter, Nillable, Sort Description Reserved for future use. This field is available in API version 50.0 and later. This field is available when CPQ Plus, Salesforce Billing, or Revenue Cloud is enabled.
CurrentLifecycleEndDate	Type dateTime Properties Filter, Nillable, Sort Description Represents the end of the period shown as current. System-populated field inherited from the end date of the current asset state period. If that field is empty, as with an evergreen subscription, the Current Lifecycle End Date field is also empty. This field is available in API version 50.0 and later. This field is available when CPQ Plus, Salesforce Billing, or Revenue Cloud is enabled.
CurrentMrr	Type currency Properties Filter, Nillable, Sort Description The asset's monthly recurring revenue during the current asset state period. System-populated field inherited from the monthly recurring revenue on the current asset state period. If no asset state period is current, the value is 0. Label is Current Monthly Recurring Revenue. This field is available in API version 50.0 and later. This field is available when CPQ Plus, Salesforce Billing, or Revenue Cloud is enabled.
CurrentQuantity	Type double

Field	Details
	Properties Filter, Nillable, Sort Description The asset's quantity during the current asset state period. System-populated field inherited from the quantity on the current asset state period. If no asset state period is current, the value is 0. This field is available in API version 50.0 and later. This field is available when CPQ Plus, Salesforce Billing, or Revenue Cloud is enabled.
Description	Type textarea Properties Create, Nillable, Update Description Description of the asset.
DigitalAssetStatus	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Status of digital tracking of the asset. The default picklist includes the following values: • On • Off • Warning • Error
ExternalIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the matching record in an external system. This field is available in API version 49.0 and later.
GeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Accuracy level of the geocode for the address.

Field	Details
HasLifecycleManagement	Type boolean Properties Defaulted on create, Filter, Group, Sort Description True if this asset is a lifecycle-managed asset, otherwise false. You can't switch an asset to a lifecycle-managed asset or the reverse. This field is system populated. The default value is <code>false</code>. This field is available in API version 50.0 and later. This field is available when CPQ Plus, Salesforce Billing, or Revenue Cloud is enabled.
InstallDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Date when the asset was installed.
IsCompetitorProduct	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this Asset represents a product sold by a competitor (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>. Its UI label is Competitor Asset.
IsInternal	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates that the asset is produced or used internally (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>. Its UI label is Internal Asset.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the asset was last modified. Its UI label is Last Modified Date.

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the asset was last viewed.
Latitude	Type double Properties Create, Filter, Group, Nillable, Sort, Update Description Used with Longitude to specify the precise geolocation of the address.
LifecycleEndDate	Type dateTime Properties Filter, Nillable, Sort Description Represents the end of the asset's lifecycle. System-populated field inherited from the end date of the final asset state period. If that field is empty, as with an evergreen subscription, the lifecycle has no end date. This field is available in API version 50.0 and later. This field is available when CPQ Plus, Salesforce Billing, or Revenue Cloud is enabled.
LifecycleStartDate	Type dateTime Properties Filter, Nillable, Sort Description Represents the beginning of the asset's lifecycle. System-populated field inherited from the start date of the earliest asset state period. This field can't be edited. When a new asset action affects the start date of an asset state period, the period is deleted and a new one is generated. This field is available in API version 50.0 and later. This field is available when CPQ Plus, Salesforce Billing, or Revenue Cloud is enabled.
LocationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The asset's location. Typically, this location is the place where the asset is stored, such as a warehouse or van.

Field	Details
	If you have access to the location entity, it doesn't necessarily mean you can access the location id field. To access the location, you must have <code>userHasLocation</code> user access.
Longitude	Type double Properties Create, Filter, Group, Nillable, Sort, Update Description Used with Latitude to specify the precise geolocation of the address.
ManufactureDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date when the asset was manufactured. This field is available from API version 49.0 and later.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description (Required) Name of the asset. Label is Asset Name.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The asset's owner. By default, the asset owner is the user who created the asset record. Its UI label is Asset Owner. This field is a relationship field. Relationship Name Owner Relationship Type Lookup Refers To User
ParentId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The asset's parent asset. Its UI label is Parent Asset. This field is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To Asset
PostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The postal code for the address.
Price	Type currency Properties Create, Filter, Nillable, Sort, Update Description Price paid for this asset.
PricingSource	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Pricing source to use when amending or renewing an asset. Valid values are: • LastTransaction—Last Transaction • PriceBookListPrice—Price Book or List Price Available in API version 60.0 and later.
Product2Id	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description (Optional) ID of the Product2 associated with this asset. Must be a valid Product2 ID. Its UI label is Product. This field is a relationship field. Relationship Name Product2 Relationship Type Lookup Refers To Product2
ProductCode	Type string Properties Filter, Group, Nillable, Sort Description The product code of the related product.
ProductDescription	Type string Properties Filter, Sort, Nillable Description The product description of the related product.
ProductFamily	Type picklist Properties Filter, Group, Sort, Nillable Description The product family of the related product.
PurchaseDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Date on which this asset was purchased.

Field	Details
Quantity	Type double Properties Create, Filter, Nillable, Sort, Update Description Quantity purchased or installed. The Quantity field value isn't set by Customer Asset Lifecycle Management. Instead, you can populate the field as you need.
QuantityIncreasePricingType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specify which pricing type to use when the quantity of this asset is increased. Its UI label is Pricing Type for Quantity Increase. This field is available in API version 56.0 and later. This field is available when Revenue Cloud is enabled. Possible values are: • <code>LastNegotiatedPrice</code>—Available in API version 58.0 and later. • <code>ListPrice</code>
RecordTypeId	Type reference Properties Create, Filter, Group, Sort, Update Description The unique identifier for the asset. This field is a relationship field. Relationship Name RecordType Relationship Type Lookup Refers To RecordType
Reliability	Type percent Properties Filter, Nillable, Sort Description The percentage of expected uptime where the asset wasn't subject to unplanned downtime.

Field	Details
RenewalPricingType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The price used when renewing a subscription. Its UI label is Pricing Type for Renewal. This field is available in API version 55.0 and later. This field is available when Revenue Cloud is enabled. Possible values are: • LastNegotiatedPrice • ListPrice
RenewalTerm	Type double Properties Create, Filter, Nillable, Sort, Update Description With Renewal Term Unit, defines the default subscription term for renewal quotes. This field is available in API version 55.0 and later. This field is available when Revenue Cloud is enabled.
RenewalTermUnit	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The unit of time for a subscription term. This field is available in API version 55.0 and later. This field is available when Revenue Cloud is enabled. Possible values are: • Annual—Available in API version 58.0 and later. —UI label is Years. • Months
SalesStoreId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the RetailStore or WebStore associated with this Asset. This field is a polymorphic relationship field. To access this field, your org must have a Salesforce Order Management license or a B2B Commerce License.

Field	Details
	This field is available in API v60.0 and later. Relationship Name SalesStore Relationship Type Lookup Refers To RetailStore, WebStore
SerialNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Serial number for this asset.
State	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The state detail for the address.
Status	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Customizable picklist of values. The default picklist includes the following values: • Purchased • Shipped • Installed • Registered • Obsolete
StatusReason	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The explanation of the device status. This field is available from API version 49.0 and later. Possible values are:

Field	Details
	• Not Ready • Off • Offline • Online • Paused • Standby
StockKeepingUnit	Type string Properties Filter, Group, Nillable, Sort Description The SKU assigned to the related product.
Street	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The street detail for the address.
SumDowntime	Type double Properties Filter, Nillable, Sort Description Accumulated downtime (planned and unplanned), determined as follows: • When only <code>UptimeRecordStart</code> is set, the sum of all downtime from <code>UptimeRecordStart</code> • When <code>UptimeRecordStart</code> and <code>UptimeRecordEnd</code> are set, the sum of all downtime from <code>UptimeRecordStart</code> to <code>UptimeRecordEnd</code> Otherwise, downtime isn't accumulated.
SumUnplannedDowntime	Type double Properties Filter, Nillable, Sort Description Accumulated unplanned downtime, determined as follows: • When only <code>UptimeRecordStart</code> is set, the sum of all unplanned downtime from <code>UptimeRecordStart</code>

Field	Details
	When <code>UptimeRecordStart</code> and <code>UptimeRecordEnd</code> are set, the sum of all unplanned downtime from <code>UptimeRecordStart</code> to <code>UptimeRecordEnd</code>. Otherwise, unplanned downtime isn't accumulated.
<code>TotalLifecycleAmount</code>	Type currency Properties Filter, Nillable, Sort Description The total amount of revenue for the asset, including revenue from each stage in the asset lifecycle. This field is available when CPQ Plus, Salesforce Billing, or Revenue Cloud is enabled.
<code>UptimeRecordEnd</code>	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date until which <code>SumDowntime</code> and <code>SumUnplannedDowntime</code> are accumulated.
<code>UptimeRecordStart</code>	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date from which <code>SumDowntime</code> and <code>SumUnplannedDowntime</code> are accumulated.
<code>UsageEndDate</code>	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Date when usage for this asset ends or expires.
<code>Uuid</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The unique ID for the asset. This field is available in API version 49.0 and later.

Usage

Use this object to track products sold to customers. With asset tracking, a client application can quickly determine which products were previously sold or are currently installed at a specific account. You can also create hierarchies of up to 10,000 assets.

For example, suppose that your company wants to renew and upsell opportunities on products sold in the past. Similarly, your company can track competitive products in a customer environment where products can be replaced or swapped out.

Asset tracking is also useful for product support, providing detailed information to assist with product-specific support issues. For example, the `PurchaseDate` or `SerialNumber` can indicate whether a given product has certain maintenance requirements, including product recalls. Similarly, the `UsageEndDate` can indicate when the asset was removed from service or when a license or warranty expires.

If an application creates an Asset record, it must specify a `Name` and either an `AccountId`, `ContactId`, or both.

With REST API, use the `getRelatedListInfo` function to get information about related lists on the asset. Note that when requesting information about *PrimaryAssets*, the response is labeled `Related Assets`, and the response for *RelatedAssets* is labeled `Primary Assets`.

Associated Objects

This object has the following associated objects. If the API version isn't specified, those objects are available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AssetChangeEvent (API version 44.0)

Change events are available for the object.

AssetFeed

Feed tracking is available for the object.

AssetHistory

History is available for tracked fields of the object.

AssetOwnerSharingRule

Sharing rules are available for the object.

AssetShare

Sharing is available for the object.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

AssetAction

Represents a change made to a lifecycle-managed asset. The fields can't be edited. This object is available in API version 50.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Special Access Rules

To use Customer Asset Lifecycle Management APIs, you must have the Access Customer Asset Lifecycle Management APIs permission and Read access to the Asset, Asset Action, Asset Action Source, and Asset State Period objects.

Fields

Field	Details
ActionDate	Type dateTime Properties Filter, Sort Description The date when an asset action change is recorded. This date can differ from the start date of the related asset state period. For example, suppose that a customer cancels a subscription in June, and the subscription expires in October. The date the customer cancels the subscription (June) is the action date of the asset action. The cancellation's effective date (October) is the start date of the asset state period.
ActualTaxChange	Type currency Properties Filter, Nillable, Sort Description The rollup of actual tax from all asset action sources. This field is populated by the system. Label is Change in Actual Tax. This field is a calculated field.
AdjustmentAmountChange	Type currency Properties Filter, Nillable, Sort Description The rollup of adjustment amount from all asset action sources. This field is populated by the system. Label is Change in Adjustment Amount. This field is a calculated field.
Amount	Type currency Properties Filter, Sort Description The delta in the total asset amount resulting from an asset action.

Field	Details
AssetActionNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The ID of the asset action. Label is Name.
AssetId	Type reference Properties Filter, Group, Sort Description The ID of the related lifecycle-managed asset. Label is Asset. This field is a relationship field. Relationship Name Asset Relationship Type Lookup Refers To Asset
CanRollBack	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the last asset action can be rolled back (<code>true</code>). If this property is set to <code>false</code>, the asset and the last asset action can't be rolled back. The default value is <code>false</code>. This field is available in API version 65.0 and later.
CategoryEnum	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The business category of the asset action, for use in reporting. Asset action totals are broken out by the picklist values on this required field, and those totals are in turn reflected on assets. These categories are available and aren't customizable. Label is Business Category. Possible values are: • Cancellations • Cross-Sells

Field	Details
	• Downgrades Indicates a transition to a lower-level version or tier of an asset. • Downsells Indicates a negative quantity amendment or a decreased Line Item total price with no change in quantity. • Initial Sale Indicates that the asset is initially purchased by an account. • Other • Renewals • Swaps Indicates the exchange of one asset for another. Applies to both swapped-out and swapped-in actions. • Terms And Conditions Changes • Transfers Indicates that an asset is transferred from one account to another. • Upgrades Indicates a transition to a higher-level version or tier of an asset. • Upsells Indicates a positive quantity amendment or an increased Line Item total price with no change in quantity.
EstimatedTaxChange	Type currency Properties Filter, Nillable, Sort Description The rollup of estimated tax from all asset action sources. This field is populated by the system. Label is Change in Estimated Tax. This field is a calculated field.
MrrChange	Type currency Properties Filter, Sort Description The delta in the asset's monthly recurring revenue resulting from an asset action. For example, suppose that the MRR during an asset state period is \$200 and the next asset action adds \$100. Then this field's value is \$100. Label is Change in Monthly Recurring Revenue.
ProductAmountChange	Type currency Properties Filter, Nillable, Sort Description The rollup of product amount from all asset action sources. This field is populated by the system. Label is Change in Product Amount. This field is a calculated field.

Field	Details
QuantityChange	Type double Properties Filter, Sort Description The delta in the asset quantity resulting from an asset action. For example, suppose that the asset quantity during an asset state period is 20 and the next asset action adds 10. Then this field's value is 10. Label is Change in Quantity.
RolledbackAssetAction	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The last asset action rolled back in the current rollback transaction. This field is available in API version 65.0 and later.
SubtotalChange	Type currency Properties Filter, Nillable, Sort Description The rollup of subtotal from all asset action sources. This field is populated by the system. Label is Change in Subtotal. This field is a calculated field.
Subtype	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The subtype of the action on the asset. Valid values are: • DowngradeFrom—Available in API version 66.0 and later. • DowngradeTo—Available in API version 66.0 and later. • FieldAmendment • Rollback • StartDateAdjustment • SwapIn—Available in API version 66.0 and later. • SwapOut—Available in API version 66.0 and later. • TransferFrom

Field	Details
	• <code>TransferTo</code> • <code>UpgradeFrom</code>—Available in API version 66.0 and later. • <code>UpgradeTo</code>—Available in API version 66.0 and later. This field is available in API version 65.0 and later.
<code>TotalAmount</code>	Type currency Properties Filter, Nillable, Sort Description The sum of the current and previous asset action amount. This field is populated by the system. This field is a calculated field.
<code>TotalCancellationsAmount</code>	Type currency Properties Filter, Nillable, Sort Description The sum of current and previous asset action amounts categorized as <code>Cancellations</code>. This field is populated by the system.
<code>TotalCrossSellsAmount</code>	Type currency Properties Filter, Nillable, Sort Description The sum of current and previous asset action amounts categorized as <code>Cross-Sells</code>. This field is populated by the system.
<code>TotalDowngradesAmount</code>	Type currency Properties Filter, Nillable, Sort Description The sum of current and previous asset action amounts categorized as <code>Downgrades</code>. This field is populated by the system and is available in API version 66.0 and later.
<code>TotalDownsellsAmount</code>	Type currency Properties Filter, Nillable, Sort

Field	Details
	Description The sum of current and previous asset action amounts categorized as <code>Downsell</code> s. This field is populated by the system.
<code>TotalInitialSaleAmount</code>	Type currency Properties Filter, Nillable, Sort Description The sum of current and previous asset action amounts categorized as <code>Initial Sale</code> . This field is populated by the system.
<code>TotalMrr</code>	Type currency Properties Filter, Nillable, Sort Description The sum of the monthly recurring revenue for the current and previous asset action. This field is populated by the system. Label is Total Monthly Recurring Revenue .
<code>TotalOtherAmount</code>	Type currency Properties Filter, Nillable, Sort Description The sum of current and previous asset action amounts categorized as <code>Other</code> . This field is populated by the system.
<code>TotalQuantity</code>	Type double Properties Filter, Nillable, Sort Description The sum of the changes in quantity for the current and previous asset action. This field is populated by the system.
<code>TotalRenewalsAmount</code>	Type currency Properties Filter, Nillable, Sort

Field	Details
	Description The sum of current and previous asset action amounts categorized as <code>Renewals</code> . This field is populated by the system.
<code>TotalSwapsAmount</code>	Type currency Properties Filter, Nillable, Sort Description The sum of current and previous asset action amounts categorized as <code>Swaps</code> . This field is populated by the system and is available in API version 66.0 and later.
<code>TotalTermsAndConditionsAmount</code>	Type currency Properties Filter, Nillable, Sort Description The sum of current and previous asset action amounts categorized as <code>Terms and Conditions Changes</code> . This field is populated by the system. Label is Total Terms and Conditions Changes Amount .
<code>TotalTransfersAmount</code>	Type currency Properties Filter, Nillable, Sort Description The sum of current and previous asset action amounts categorized as <code>Transfers</code> . This field is populated by the system.
<code>TotalUpgradesAmount</code>	Type currency Properties Filter, Nillable, Sort Description The sum of current and previous asset action amounts categorized as <code>Upgrades</code> . This field is populated by the system and is available in API version 66.0 and later.
<code>TotalUpsellsAmount</code>	Type currency Properties Filter, Nillable, Sort

Field	Details
	Description The sum of current and previous asset action amounts categorized as <code>Upsells</code> . This field is populated by the system.
Type	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The REST API used to generate the asset action. This field is populated by the system. Valid values are: • Cancel • Change • Convert • Generate

AssetActionSource

Represents an optional way to record what transactions caused changes to lifecycle-managed assets. Use it to trace financial and other information about asset actions. This object supports Salesforce order products and work order line items, and transaction IDs from other systems. The fields can't be edited. This object is available in API version 50.0 and later.

Supported Calls

`createable()`, `deletable()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undeletable()`, `updateable()`.

Special Access Rules

To use Customer Asset Lifecycle Management APIs, you must have the Access Customer Asset Lifecycle Management APIs permission and Read access to the Asset, Asset Action, Asset Action Source, and Asset State Period objects.

Fields

Field	Details
ActualTax	Type currency Properties Createable, Filter, Nillable, Sort, Updateable

Field	Details
	Description The region-specific tax amount determined at time of the order. This field is not used for price and tax calculations.
AdjustmentAmount	Type currency Properties Createable, Filter, Nillable, Sort, Updateable Description An adjustment to the product amount, such as a discount.
AssetActionId	Type reference Properties Createable, Filter, Group, Sort Description The related asset action, that is, the change caused by an asset action source transaction. This field is a relationship field. Relationship Name AssetAction Relationship Type Lookup Refers To AssetAction
AssetActionSourceNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The ID of the asset action source. Label is Name.
BillingReference	Type string Properties Filter, Group, Nillable, Sort Description The ID of the OrderItem or OrderItemDetail record that this AssetActionSource record is created for.

Field	Details
Discount	Type percent Properties Createable, Filter, Group, Nillable, Sort, Updateable Description The discount, expressed as a percentage, that's applied to the asset. This field is available in API version 62.0 and later.
DiscountAmount	Type currency Properties Createable, Filter, Nillable, Sort, Updateable Description The discount, expressed as currency, that's applied to the asset. This field is available in API version 62.0 and later.
EffectiveGrantDate	Type dateTime Properties Createable, Filter, Nillable, Sort, Updateable Description The date when the resources associated with the asset were granted. This field is available in orgs that have Revenue Cloud when Rate Management is enabled. This field is available in API version 62.0 and later.
EndDate	Type dateTime Properties Createable, Filter, Nillable, Sort, Updateable Description The end date of the service or change.
EstimatedTax	Type currency Properties Createable, Filter, Nillable, Sort, Updateable Description The estimate of the region-specific tax amount made at time of the transaction.
ExternalReference	Type string

Field	Details
	Properties Createable, Filter, Group, Nillable, Sort, Updateable Description The ID of an asset action source transaction originating in a system outside of Salesforce.
ExternalReferenceDataSource	Type string Properties Createable, Filter, Group, Nillable, Sort, Updateable Description A system outside of Salesforce that contains asset action source transactions.
LegalEntityId	Type reference Properties Createable, Filter, Group, Nillable, Sort, Updateable Description The ID of the legal entity record associated with the asset action source transaction. This field is a relationship field. This field is available in API version 62.0 and later. Relationship Name LegalEntity Relationship Type Lookup Refers To LegalEntity
ListPrice	Type currency Properties Createable, Filter, Nillable, Sort, Updateable Description List price for the order product. Value is inherited from the associated PriceBookEntry upon order product creation.
NetUnitPrice	Type currency Properties Createable, Filter, Nillable, Sort, Updateable

Field	Details
	Description The final adjusted unit price, inclusive of all adjustments, but exclusive of tax. The unit price after all price adjustments are applied.
ObligatedAmount	Type currency Properties Createable, Filter, Nillable, Sort, Updateable Description When a line amount is prorated, this amount shows the service amount that's been consumed.
OriginalLineNumber	Type int Properties Createable, Filter, Group, Nillable, Sort, Updateable Description The number of the original order item detail line. Salesforce uses this information to create a record to amend, renew, or cancel an order. This field is available in API version 64.0 and later. Relationship Name OrderItemDetail Relationship Type Lookup Refers To LineNumber
PeriodBoundary	Type picklist Properties Createable, Filter, Nillable, Sort, Updateable Description Boundary delimiters for periods. It determines when a period starts and/or ends. Valid values are: - AlignToCalendar - Anniversary - DayOfPeriod - LastDayOfPeriod
PeriodBoundaryDay	Type int

Field	Details
	Properties Createable, Filter, Nillable, Sort, Updateable Description The number specifying the day number when Period Boundary is a specific day in a week/month/year. It only applies when PeriodBoundary is set to "day of period."
PeriodBoundaryStartMonth	Type picklist Properties Createable, Filter, Nillable, Sort, Updateable Description Field is populated based on input in the StartDate, PeriodBoundary, and PeriodBoundaryDay when BillingFrequency2 is Annual or by manual user entry. Possible values are: 1-January 2-February 3-March 4-April 5-May 6-June 7-July 8-August 9-September 10-October 11-November 12-December
PricebookEntryId	Type reference Properties Createable, Filter, Group, Nillable, Sort, Updateable Description PricebookEntry is used as a lookup for price information in order to pre-populate OrderItem's ListPrice and UnitPrice.
PricingTermCount	Type double Properties Createable, Filter, Nillable, Sort, Updateable Description Number of pricing terms is this subscription product.

Field	Details
ProductAmount	Type currency Properties Createable, Filter, Nillable, Sort, Updateable Description The product amount after the asset action source transaction.
ProductSellingModelId	Type reference Properties Createable, Filter, Group, Nillable, Sort, Updateable Description Specifies the product selling model type. Foreignkey to ProductSellingModel entity.
ProrationPolicyId	Type reference Properties Createable, Filter, Group, Nillable, Sort, Updateable Description The ID of the ProrationPolicy used for pricing.
Quantity	Type double Properties Createable, Filter, Nillable, Sort, Updateable Description The product quantity or the change in product quantity after the asset action source transaction.
ReferenceEntityItemId	Type reference Properties Createable, Filter, Group, Nillable, Sort, Updateable Description The ID of an asset action source transaction originating in Salesforce. The transaction can be an order product or a work order line item. This field is a polymorphic relationship field. Relationship Name ReferenceEntityItem Relationship Type Lookup

Field	Details
	Refers To OrderItem, WorkOrderLineItem
SegmentIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the ramp segment associated with the asset action source transaction. This field is available in API version 62.0 and later.
StartDate	Type dateTime Properties Createable, Filter, Nillable, Sort, Updateable Description The start date of the service or change.
Subtotal	Type currency Properties Filter, Nillable, Sort Description The sum of the product amount and the adjustment amount. This field is a calculated field.
TaxTreatmentId	Type reference Properties Createable, Filter, Group, Nillable, Sort, Updateable Description Lookup to Tax Treatment entity. It's used to calculate tax.
TotalLineAmount	Type currency Properties Createable, Filter, Nillable, Sort, Updateable Description The price of the line before any price adjustments were applied. SalesTransactionItem: ProratedStartingTotal / StartingPriceTotal. Note: TotalPrice is computed using the UnitPrice,

Field	Details
	which includes discounts (price adjustments), while TotalLineAmount doesn't include price adjustments.
TotalPrice	Type currency Properties Createable, Filter, Nillable, Sort, Updateable Description Calculated by the pricing engine for ARC. Summation of TotalAdjustmentAmount plus TotalLineAmount for this item.
TransactionDate	Type dateTime Properties Createable, Filter, Nillable, Sort, Updateable Description The date of a source transaction, such as an order date.
UnitPrice	Type currency Properties Createable, Filter, Nillable, Sort, Updateable Description The unit price of the item before any discounts or tax calculation.

AssetAttribute

Stores asset attributes to track and analyze asset conditions to improve their uptime. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `update()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
AssetId	Type reference Properties Create, Filter, Group, Sort Description The ID of the asset. This field is a relationship field. Relationship Name Asset Relationship Type Lookup Refers To Asset
AttributeDefinitionId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the attribute definition for this asset attribute. This field is a relationship field. Relationship Name AttributeDefinition Relationship Type Lookup Refers To AttributeDefinition
AttributeName	Type string Properties Filter, Group, Sort Description The name given to the asset attribute in the UI by the user.
AttributePicklistValueId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The ID of the attribute picklist value if the attribute is a picklist type. This field is a relationship field. Relationship Name AttributePicklistValue Relationship Type Lookup Refers To AttributePicklistValue
AttributeValue	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Stores the value of an asset attribute, for example 5-TB storage .
ExternalId	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An auto-generated ID of the attribute record saved in an external system (for example an HBase database). This field is reserved and used for internal purpose.

Usage

Add asset descriptors to the AssetAttribute object instead of creating multiple custom attributes on an asset. This helps scale to a high asset volume in the system.

SEE ALSO:

[AttributeDefinition](#)
[AttributePicklist](#)
[AttributePicklistValue](#)
[RecordsetFiltrCritMonitor](#)

AssetContractRelationship

Represents a relationship between an asset and a contract. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

This object is available in Enterprise, Unlimited, and Developer Editions of Revenue Cloud.

Fields

Field	Details
AssetId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the asset related to the contract. This field is a relationship field. Relationship Name Asset Relationship Type Lookup Refers To Asset
ContractId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the contract related to the asset. This field is a relationship field. Relationship Name Contract Relationship Type Lookup Refers To Contract
EndDate	Type dateTime

Field	Details
	Properties Create, Filter, Sort, Update Description The end date and time of the relationship between contract and asset.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view. The associated UI label is Last Modified Date .
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user accessed this record or list view (LastReferencedDate) but didn't view it.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The auto-generated number assigned to AssetContractRelationship. (Read Only)
StartDate	Type dateTime Properties Create, Filter, Sort, Update Description The start date and time of the relationship between contract and asset.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AssetContractRelationshipFeed](#)

Feed tracking is available for the object.

AssetContractRelationshipHistory

History is available for tracked fields of the object.

AssetDowntimePeriod

Represents a period during which an asset is not able to perform as expected. Downtime periods include planned activities, such as maintenance, and unplanned events, such as mechanical breakdown. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AssetDowntimePeriodNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The unique number of this asset downtime period record.
AssetId	Type reference Properties Create, Filter, Group, Sort Description The ID of the asset this asset downtime period record is for.
Description	Type textarea Properties Create, Nillable, Update Description The description of this asset downtime period.
DowntimeType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description The type of this asset downtime period. Possible values are: - Planned - Unplanned
EndTime	Type dateTime Properties Create, Filter, Sort, Update Description The time this asset downtime period ended.
IsExcluded	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Whether this asset downtime period is excluded from the calculation of accumulated downtime and accumulated unplanned downtime, and therefore not included in availability and reliability calculations.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (<code>LastReferencedDate</code>) and not viewed.
StartTime	Type dateTime Properties Create, Filter, Sort, Update Description The time this asset downtime period started.

AssetOwnerSharingRule

Represents the rules for sharing an Asset with users other than the owner. This object is available in API version 33.0 and later.



Note: To enable access to this object for your org, contact Salesforce customer support. However, we recommend that you instead use Metadata API to programmatically update owner sharing rules because it triggers automatic sharing rule recalculation. The [SharingRules](#) Metadata API type is enabled for all orgs.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
<code>AssetAccessLevel</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A value that represents the type of sharing being allowed. The possible values are: • Read • Edit
<code>Description</code>	Type textarea Properties Create, Filter, Nillable, Sort, Update Description A description of the sharing rule. Maximum size is 1000 characters.
<code>DeveloperName</code>	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a

Field	Details
	letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Corresponds to Rule Name in the user interface.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance may slow while Salesforce generates one for each record.
GroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the source group. Cases owned by users in the source group trigger the rule to give access.
Name	Type string Properties Create, Filter, Group, Sort, Update Description Label of the sharing rule as it appears in the user interface. Limited to 80 characters. Corresponds to Label on the user interface.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the target user or group. Target users or groups are given access.

Usage

Use this object to manage the sharing rules for assets. General sharing uses this object.

SEE ALSO:

[Metadata API Developer Guide: SharingRules](#)

AssetRateAdjustment

Stores the tier rate adjustments for the asset rate card entries. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is available in orgs where Revenue Cloud is enabled.

Fields

Field	Details
AdjustmentType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of rate adjustment. Valid values are: • Amount—Adjusts rate by using a specific amount. • Override—Adjusts rate by using the override rate. • Percentage—Adjusts rate by using a percentage.
AdjustmentValue	Type double Properties Filter, Sort Description The value of the adjustment.
AssetRateCardEntryId	Type reference Properties Filter, Group, Sort Description The ID of the parent asset rate card entry record associated with the asset rate adjustment.

Field	Details
	This field is a relationship field. Relationship Name AssetRateCardEntry Relationship Type Master-detail Refers To AssetRateCardEntry (the master object)
LowerBound	Type double Properties Filter, Nillable, Sort Description The minimum quantity for the adjustment to be applicable.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the asset rate adjustment.
UpperBound	Type double Properties Filter, Nillable, Sort Description The maximum quantity for the adjustment to be applicable.

AssetRateCardEntry

Stores the negotiated rate card entries that are associated with an asset in Revenue Cloud. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is available in orgs where Revenue Cloud is enabled.

Fields

Field	Details
AssetId	Type reference Properties Filter, Group, Sort Description The ID of the asset rate card entry record. This field is a relationship field. Relationship Name Asset Relationship Type Master-detail Refers To Asset (the master object)
BindingObjectFormula	Type string Properties Filter, Group, Nillable, Sort Description The formula that returns the ID of the associated binding object, if specified. If binding object isn't added, the formula returns the asset ID of the asset related to this asset rate card entry. This field is read-only. Available in API version 65.0 and later.
BindingObjectId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the binding object associated with the asset rate card entry. Available in API version 65.0 and later. This field is a relationship field. Relationship Name BindingObject Refers To Asset

Field	Details
BindingObjectRateOrder	Type double Properties Filter, Nillable, Sort Description The order that determines the applicable binding object rate when multiple rates are defined for an Anchor binding object within a effective period. Available in API version 65.0 and later.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The ID of the binding object associated with the asset rate card entry. Possible values are: • AED - UAE Dirham • AUD - Australian Dollar • BRL - Brazilian Real • CAD - Canadian Dollar • EUR - Euro • GBP - British Pound • INR - Indian Rupee • JPY - Japanese Yen • SEK - Swedish Krona • USD - U.S. Dollar The default value is USD. Available in API version 65.0 and later.
EndDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the rate card's time period becomes inactive. The rate card becomes inactive at 11:59:00 PM on the end date.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort

Field	Details
	Description An auto-generated number assigned to the asset rate card entry. Read-only.
NegotiatedRate	Type double Properties Filter, Sort Description The base negotiated rate used to charge overage consumption.
RateCardEntryId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the rate card entry record containing the catalog rates that's associated with the asset rate card entry. This field is a relationship field. Relationship Name RateCardEntry Refers To RateCardEntry
RateCardId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the rate card record that's associated with the asset rate card entry. This field is a relationship field. Relationship Name RateCard Refers To RateCard
RateUnitOfMeasureId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the unit of measure record that's associated with the asset rate card entry.

Field	Details
	This field is a relationship field. Relationship Name RateUnitOfMeasure Refers To UnitOfMeasure
StartDate	Type dateTime Properties Filter, Sort Description The date when the rate card's time period becomes active. The rate card becomes active at 12:00:00 AM on the start date.
UsageResourceId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the usage resource record that's associated with the asset rate card entry. This field is a relationship field. Relationship Name UsageResource Refers To UsageResource

AssetRelationship

Represents a non-hierarchical relationship between assets due to an asset modification; for example, a replacement, upgrade, or other circumstance. In Revenue Lifecycle Management, this object represents an asset or assets grouped in a bundle or set. This object is available in API version 41.0 and later.

Asset relationships appear in the Primary Assets and Related Assets related lists on asset records in the UI.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Some fields are available only in Revenue Cloud. Field availability is noted in the field detail column.

Fields

Field Name	Details
AssetId	Type reference Properties Create, Filter, Group, Sort Description The unique identifier of the new asset, which is the asset that is taking the place of the existing asset. This field is a relationship field. Relationship Name Asset Relationship Type Lookup Refers To Asset
AssetRelationshipNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-generated number identifying the asset relationship.
AssetRole	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Describes the position of the main asset relative to the other assets in the relationship. This field is available in API version 58.0 and later. This field is available in orgs with Revenue Cloud. Possible values are: • Add-on—The main asset is an add-on. • Bundle—The main asset is the bundle parent. • Set—The asset is the main asset in the set.
CurrencyIsoCode	Type picklist

Field Name	Details
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Three-letter ISO 4217 currency code associated with the asset. The default value is USD.
FromDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date when the new asset was installed.
GroupingKey	Type string Properties Filter, Group, idLookup, Nillable, Sort Description Read-only field used to indicate the bundle that an asset belongs to. For example, if two assets have the same GroupingKey value, then it means that the assets are bundled together. This field is available in API v.60.0 and later. This field is available in orgs with Revenue Cloud.
ProductRelationshipTypeId	Type reference Properties Filter, Group, Nillable, Sort Description The unique identifier of the record that describes the relationship between the main and associated assets. This field is available in API version 58.0 and later. This field is available in orgs with Revenue Cloud. This field is a relationship field. Relationship Name ProductRelationshipType Relationship Type Lookup Refers To ProductRelationshipType

Field Name	Details
ProductRelatedComponent	Type reference Properties Filter, Group, Nillable, Sort Description The product related component that's associated with the asset relationship. This field is a relationship field. This field is available in API 60.0 and later in Revenue Cloud. Relationship Name ProductRelatedComponent Relationship Type Lookup Refers To ProductRelatedComponent
RelatedAssetId	Type reference Properties Create, Filter, Group, Sort, Update Description The existing asset that is being modified. This field is a relationship field. Relationship Name RelatedAsset Relationship Type Lookup Refers To Asset
RelatedAssetPricing	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Specifies whether the price of the related asset is included in the bundle price. Valid values are: • IncludedInBundlePrice • NotIncludedInBundlePrice This field is available in API version 59.0 and later in Revenue Cloud.

Field Name	Details
RelatedAssetQtyScaleMethod	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Specifies how the quantity of the related asset changes relative to the quantity of the parent asset. Valid values are: • Constant • Proportional This field is available in API version 59.0 and later in Revenue Cloud.
RelatedAssetRole	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Describes the position of the associated asset relative to other assets in the relationship. This field is available in API version 58.0 and later. This field is available in orgs with Revenue Cloud. Valid values are: • Add-on—The main asset is an add-on. • Bundle—The main asset is the bundle parent. • Set—The asset is the main asset in the set. • Simple—The asset is purchased individually and isn't associated with variations. • Variation Parent—The main asset is the variation parent.
RelationshipType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The type of relationship between the existing asset and the new asset. This field comes with three values—Replacement, Upgrade, and Crossgrade—, but you can create more values in Setup. Possible values are: • Crossgrade—The new asset is a crossgrade of an existing asset. For example, changing a subscription to a plan with the same service, but that runs for a longer amount of time.

Field Name	Details
	Replacement—The new asset is replacing an existing asset. For example, a customer’s faulty widget that was under warranty is being replaced with a new one. Upgrade—The new asset is an upgrade of an existing asset. For example, upgrading a customer’s existing subscription plan to a new plan with more services. The default value is Replacement.
ToDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date when the modified asset is uninstalled.

Associated Objects

This object has the following associated objects. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

AssetRelationshipChangeEvent (API version 62.0)

Change events are available for the object.

AssetRelationshipFeed

Feed tracking is available for the object.

AssetRelationshipHistory

History is available for tracked fields of the object.

AssetRelationshipOwnerSharingRule (API version 58.0)

Sharing rules are available for the object.

AssetRelationshipShare (API version 58.0)

Sharing is available for the object.

AssetShare

Represents a sharing entry on an Asset. This object is available in API version 33.0 and later.

You can only create, edit, and delete sharing entries for standard objects whose **RowCause** field is set to **Manual**. Sharing entries for standard objects with different **RowCause** values are created as a result of your Salesforce org’s sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren’t stored at all.



Note: While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it’s possible that we’ll stop storing certain share records to improve performance. As a best practice, don’t create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Customer Portal users can't access this object.

Fields

The properties available for some fields depend on the default organization-wide sharing settings. The properties listed are true for the default settings of such fields.

Field	Details
<code>AssetAccessLevel</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Level of access that the User or Group has to the Asset. The possible values are: • Read • Edit • All This value is not valid for creating or deleting records. This field must be set to an access level that is higher than the organization's default access level for cases.
<code>AssetId</code>	Type reference Properties Filter, Group, Sort Description ID of the Asset associated with this sharing entry. This field can't be updated. This is a relationship field. Relationship Name Asset Relationship Type Lookup Refers To Asset
<code>IsDeleted</code>	Type boolean

Field	Details
	Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
RowCause	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is <code>Manual</code>. If no value is specified, the field defaults to <code>Manual</code>. All other <code>RowCause</code> values are read-only. After the sharing entry is created, this field can't be edited. Valid values include: • <code>Manual</code>—The User or Group has access because a user with "All" access manually shared the Asset with them. • <code>Owner</code>—The User is the owner of the Asset. • <code>Rule</code>—The User or Group has access via an Asset sharing rule. • <code>GuestRule</code>—The User or Group has access via an Asset guest user sharing rule. • <code>LpuImplicit</code>—The User has access to records owned by high-volume Experience Cloud site users via a share group.
UserOrGroupId	Type reference Properties Filter, Group, Sort Description ID of the User or Group that has been given access to the Asset. This field can't be updated. This is a polymorphic relationship field. Relationship Name UserOrGroup Relationship Type Lookup Refers To Group, User

Usage

This object allows you to determine which users and groups can view and edit Asset records owned by other users.

If you attempt to create a new record that matches an existing record, request updates any modified fields and returns the existing record.

AssetStatePeriod

Represents a time span when an asset has the same quantity, amount, and monthly recurring revenue (MRR). An asset has as many asset state periods as there are changes to it (asset actions) during its lifecycle. The dashboard and related pages show the current asset state period. The fields can't be edited. This object is available in API version 50.0 and later.

Supported Calls

`createable()`, `deletable()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `updateable()`.

Special Access Rules

To use Customer Asset Lifecycle Management APIs, you must have the Access Customer Asset Lifecycle Management APIs permission and Read access to the Asset, Asset Action, Asset Action Source, and Asset State Period objects.

Fields

Field	Details
Amount	Type currency Properties Createable, Filter, Sort, Updateable Description An asset's total amount during an asset state period. Revenue Cloud doesn't set or use this field's value currently.
AssetId	Type reference Properties Createable, Filter, Group, Sort Description The asset related to an asset state period. Label is Asset. This field is a relationship field. Relationship Name Asset Relationship Type Lookup Refers To Asset

Field	Details
AssetStatePeriodNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The ID of the asset state period. Label is Name.
BillingFrequency	Type picklist Properties Createable, Filter, Group, Nillable, Restricted picklist, Sort, Updateable Description The time period that indicates how often the line item is billed. Possible values are: • Annual • Monthly • Quarterly • Semi-Annual Available in API version 65.0 and later.
BindingInstanceTargetId	Type reference Properties Createable, Filter, Group, Nillable, Sort, Updateable Description The ID of a custom product target for a usage-based quote line item, order item, or asset allocation. This field is a polymorphic relationship field. Relationship Name BindingInstanceTarget Refers To Account, Asset, BindingObjectCustomExt, Contract
Discount	Type percent Properties Createable, Filter, Nillable, Sort, Updateable Description Editable number from 0 to 100. Available in API version 65.0 and later.

Field	Details
DiscountAmount	Type currency Properties Createable, Filter, Nillable, Sort, Updateable Description The fixed amount discount to apply to the line item. Available in API version 65.0 and later.
EndDate	Type dateTime Properties Createable, Filter, Nillable, Sort, Updateable Description The end date and time of an asset state period. On an asset that is an evergreen subscription, the last asset state period has no end date.
LegalEntityId	Type reference Properties Createable, Filter, Group, Nillable, Sort, Updateable Description The ID of the related legal entity. This field is a relationship field. Relationship Name LegalEntity Refers To LegalEntity
Mrr	Type currency Properties Createable, Filter, Sort, Updateable Description An asset's monthly recurring revenue during an asset state period.
PriceRevisionPolicy	Type reference Properties Createable, Filter, Group, Sort, Updateable Description Specifies the price uplift policy associated with this asset state period. This field is a relationship field.

Field	Details
	This field is available in API version 65.0 and later. Relationship Name Price Revision Policy Relationship Type Lookup Refers To PriceRevisionPolicy
Quantity	Type double Properties Createable, Filter, Sort, Updateable Description The total quantity of an asset during an asset state period.
RampIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ramp record used to group order item segments for this asset state period. This field is available in orgs that have Revenue Cloud when the Ramp Deals setting is enabled. This field is available in API version 62.0 and later.
SegmentIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The order item segment for this asset state period. This field is available in orgs that have Revenue Cloud when the Ramp Deals setting is enabled. This field is available in API version 62.0 and later.
SegmentName	Type string Properties Createable, Filter, Group, Nillable, Sort, Updateable Description The name of the order item segment for this asset state period. This field is available in orgs that have Revenue Cloud when the Ramp Deals setting is enabled.

Field	Details
	This field is available in API version 62.0 and later.
SegmentType	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Updateable Description The period for the order item segment for this asset state period. Valid values are: • Custom • Free Trial • Yearly The default value is Yearly. This field is available in orgs that have Revenue Cloud when the Ramp Deals setting is enabled. This field is available in API version 62.0 and later.
StartDate	Type dateTime Properties Createable, Filter, Sort, Updateable Description The start date and time of an asset state period.
UnitPrice	Type currency Properties Createable, Filter, Nillable, Sort, Updateable Description The price per unit for the line item. Available in API version 65.0 and later. Revenue Cloud won't populate this field in API version 66.0 and later.
UnitPriceUplift	Type percent Properties Createable, Filter, Nillable, Sort, Updateable Description Indicates the percentage increase of a line item's unit price. Available in API version 65.0 and later.

AssetStatePeriodAttribute

Represents a virtual object that holds the key-value pair of the asset attribute in a specified asset state period. This object is a child object of AssetStatePeriod. This object is available in API version 60.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

This object is available in Enterprise, Unlimited, and Developer Editions of Revenue Cloud with the [Access Lifecycle-Managed Assets user permission](#). This object is editable only through API and not the UI.

Fields

Field	Details
AssetStatePeriodId	Type reference Properties Filter, Group, Sort Description The asset state period that's associated with the asset attribute. This field is a relationship field. Relationship Name AssetStatePeriod Relationship Type Master-detail Refers To AssetStatePeriod (the master object)
AttributeDefinitionId	Type reference Properties Filter, Group, Sort Description The attribute definition that's associated with the asset state period attribute. This field is a relationship field. Relationship Name AttributeDefinition

Field	Details
	Relationship Type Lookup
	Refers To AttributeDefinition
AttributeName	Type string
	Properties Filter, Group, idLookup, Nillable, Sort
	Description The name of the asset attribute.
AttributePicklistValueId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description The value specified in the picklist type field that corresponds to the attribute in the AttributePicklistValue object. This field is a relationship field.
	Relationship Name AttributePicklistValue
	Relationship Type Lookup
	Refers To AttributePicklistValue
AttributeValue	Type string
	Properties Filter, Group, Nillable, Sort
	Description The value of the asset state period attribute. For example, a shirt can have the value of <code>blue</code> , which indicates the shirt's color, or it can have the value of <code>small</code> , which indicates the shirt's size. You can use this field to filter records only if the <code>DataType</code> value in the related <code>AttributeDefinitionId</code> record is <code>Text</code> . If the <code>DataType</code> value is <code>Picklist</code> , use the value in the <code>AttributePicklistValueId</code> field for filtering. You can't use this field to filter records if the <code>DataType</code> value is <code>Checkbox</code> , <code>Currency</code> , <code>Date</code> , <code>Datetime</code> , <code>Multipicklist</code> , <code>Number</code> , or <code>Percent</code> .

Usage

This object doesn't support custom fields, validation rules, or triggers. In SOQL queries, you can filter records by using `Id` and `AttributeDefinition`. You can't use `AttributeValue` in the `WHERE` clause.

AssetTag

Associates a word or short phrase with an Asset.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
<code>ItemId</code>	Type reference Properties Create, Filter Description ID of the tagged item.
<code>Name</code>	Type string Properties Create, Filter Description Name of the tag. If this value does not already exist, a new <code>TagDefinition</code> is created and becomes the parent of this <code>Tag</code> object. Otherwise, a <code>TagDefinition</code> with the same name becomes the parent of this <code>Tag</code> object. Parent relationships are created automatically.
<code>TagDefinitionId</code>	Type reference Properties Filter Description ID of the parent <code>TagDefinition</code> object that owns the tag.
<code>Type</code>	Type picklist Properties Create, Filter, Restricted picklist

Field Name	Details
	Description Defines the visibility of a tag. Valid values: • <code>Public</code>—The tag can be viewed and manipulated by all users in an organization. • <code>Personal</code>—The tag can be viewed or manipulated only by a user with a matching <code>OwnerId</code>.

Usage

AssetTag stores the relationship between its parent TagDefinition and the Asset being tagged. Tag objects act as metadata, allowing users to describe and organize their data.

When a tag is deleted, its parent TagDefinition will also be deleted if the name is not being used; otherwise, the parent remains. Deleting a TagDefinition sends it to the Recycle Bin, along with any associated tag entries.

AssetTokenEvent

The documentation has moved to [AssetTokenEvent](#) in the *Platform Events Developer Guide*.

AssetWarranty

Defines the warranty terms applicable to an asset along with any exclusions and extensions. This object is available in API version 50.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
<code>AssetId</code>	Type reference Properties Create, Filter, Group, Sort Description The ID of the asset this warranty term applies to.

Field	Details
AssetWarrantyNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The identifier of the asset warranty record.
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date on which this warranty term expires.
ExchangeType	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The type of exchange offered by this warranty term.
Exclusions	Type textarea Properties Create, Nillable, Update Description Description of any exclusions.
ExpensesCovered	Type percent Properties Create, Filter, Nillable, Sort, Update Description The percentage of expenses covered.
ExpensesCoveredEndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date on which cover for expenses ends.

Field	Details
IsTransferable	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Defines whether the warranty term can be transferred to a new owner.
LaborCovered	Type percent Properties Create, Filter, Nillable, Sort, Update Description The percentage of labor covered.
LaborCoveredEndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date on which cover for labor ends.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the asset warranty term was last modified. Its label in the user interface is <code>Last Modified Date</code>.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the asset warranty term was last viewed.
PartsCovered	Type percent Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description The percentage of parts covered.
PartsCoveredEndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date on which cover for parts ends.
Pricebook2Id	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the price book item associated with this asset warranty term.
StartDate	Type date Properties Create, Filter, Group, Sort, Update Description The date on which cover under this warranty term starts.
WarrantyTermId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the warranty term this asset warranty term extends.
WarrantyType	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The type of the warranty.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AssetWarrantyChangeEvent](#)

Change events are available for the object.

AssignedResource

Represents a service resource who is assigned to a service appointment in Field Service and Lightning Scheduler. Assigned resources appear in the Assigned Resources related list on service appointments. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
<code>ActualTravelTime</code>	Type double Properties Create, Filter, Nillable, Sort, Update Description The number of minutes that the service resource needs to travel to the assigned service appointment. You can enter a value with up to two decimal places.
<code>ApptAssistantInfoUrl</code>	Type textarea Properties Create, Nillable, Update Description The URL that contains the status of the mobile worker approaching the service appointment, the Community URL, and the expiry of the URL. Available in version 51.0 and later.
<code>AssignedResourceNumber</code>	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-generated number identifying the resource assignment.

Field Name	Details
EstimatedTravelTime	Type double Properties Create, Filter, Nillable, Sort, Update Description The estimated number of minutes needed for the service resource to travel to the service appointment they're assigned to. You can enter a value with up to two decimal places.
LocationStatus	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The status of the mobile worker approaching the service appointment. When the location status changes to one of these values, a status update containing <code>ApptAssistantInfoUrl</code> is sent to the customer. Available in version 51.0 and later. Possible values are: • EnRoute • LastMile
IsPrimaryResource	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the service resource is a primary resource or not. The default value is false. Available in API version 47.0 and later.
ServiceAppointmentId	Type reference Properties Create, Filter, Group, Sort Description The service appointment that the resource is assigned to. This is a relationship field. Relationship Name ServiceAppointment Relationship Type Lookup

Field Name	Details
	Refers To ServiceAppointment
ServiceCrewId	Type reference Properties Create, Update, Filter, Group, Sort, Nillable Description The service crew that the resource is assigned to.  Note: Since service resources can represent crews or individuals, appointments are typically assigned to crews in the following way: 1. Create a service resource of the Crew type that represent the crew. 2. Create an assigned resource on the service appointment and select the crew resource in the <code>ServiceResourceId</code> field. As an alternative, you can assign appointments to crew members separately. This lets you track each member's travel time and see a list of the crew members in the Assigned Resources related list. To take this approach, create an assigned resource for each crew member. List the crew member in the <code>ServiceResourceId</code> field and the crew they belong to in the <code>ServiceCrewId</code> field.
ServiceResourceId	Type reference Properties Create, Update, Filter, Group, Sort Description The resource who is assigned to the service appointment. This is a relationship field. Relationship Name ServiceResource Relationship Type Lookup Refers To ServiceResource
Transaction	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The last transaction ID of the scheduling and optimization request that updated this object. The transaction ID is automatically generated and populated by the Enhanced Scheduling and Optimization engine. Available in API version 63.0 and later.

Usage

You can assign multiple service resources to a service appointment. Service resources who are assigned to service appointments cannot be deactivated until they are removed from the appointments.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AssignedResourceChangeEvent (API version 48.0)

Change events are available for the object.

AssignedResourceHistory on page 63 (API version 61.0)

History is available for tracked fields of the object.

AssignedResourceFeed

Feed tracking is available for the object.

AssignmentRule

Represents an assignment rule associated with a Case or Lead.

Supported Calls

`describeObjects()`, `query()`, `retrieve()`, `search()`

Special Access Rules

- This object is read only. Assignment rules are created, configured, and deleted in the user interface.
- Customer Portal users can't access this object.

Fields

Field	Details
Active	Type boolean

Field	Details
	Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this assignment rule is active (<code>true</code>) or not (<code>false</code>).
Name	Type string Properties Filter, Group, Nillable, Sort Description Name of this assignment rule.
SubjectType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Type of assignment rule—Case or Lead.

Usage

Before creating or updating a new Case or Lead, a client application can query (by name) the AssignmentRule to obtain the ID of the assignment rule to use, and then assign that ID to the `assignmentRuleId` field of the AssignmentRuleHeader. The AssignmentRuleHeader can be set using either SOAP API or REST API.

Assignment rules can also be specified when creating or upserting Case or Lead objects via the Bulk API or the Bulk 2.0 API.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

AssociatedLocation

Represents a link between an account and a location in Field Service. You can associate multiple accounts with one location. For example, a shopping center location may have multiple customer accounts.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
ActiveFrom	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date and time the associated location is active.
ActiveTo	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date and time the associated location stops being active.
AssociatedLocationNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Auto-generated number identifying the associated location.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the associated location was last modified.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the associated location was last viewed.

Field Name	Details
LocationId	Type reference Properties Create, Filter, Group, Sort, Update Description The location associated with the address. This is a relationship field. Relationship Name Location Relationship Type Lookup Refers To Location
ParentRecordId	Type reference Properties Create, Filter, Group, Sort Description The account associated with the location. This is a relationship field. Relationship Name ParentRecord Relationship Type Lookup Refers To Account
Type	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Picklist of address types. The values are: • Bill To • Ship To

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

AssociatedLocationChangeEvent (API version 62.0)

Change events are available for the object.

AssociatedLocationHistory

History is available for tracked fields of the object.

AsyncApexJob

Represents an individual Apex sharing recalculation job, a batch Apex job, a method with the `future` annotation, or a job that implements `Queueable` or `Schedulable`. Use this object to query Apex batch jobs in your organization.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

If Apex isn't running in system mode, users must have the View Setup and Configuration permission to access this object and to enqueue asynchronous Apex jobs.

Fields

Field Name	Details
ApexClassId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the Apex class executing the job. Label is <code>Class ID</code>. This is a relationship field. Relationship Name ApexClass Relationship Type Lookup Refers To ApexClass
CompletedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the job was completed.

Field Name	Details
CronTriggerId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the CronTrigger for the AsyncApexJob. This field only applies to ScheduledApex job type. This field is available in API version 53.0 and later. For scheduled jobs created before version 53.0, this field is populated on subsequent execution. This is a relationship field. Relationship Name CronTrigger Relationship Type Lookup Refers To CronTrigger
ExtendedStatus	Type string Properties Filter, Group, Nillable, Sort Description If one or more errors occurred during the batch processing, this field contains a short description of the first error. A more detailed description of that error, along with any subsequent errors, is emailed to the last user who modified the batch class. This field is available in API version 19.0 and later.
JobItemsProcessed	Type int Properties Filter, Group, Sort Description Number of job items processed. Label is <code>Batches Processed</code>.
JobType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of job being processed. Valid values are: - ApexToken - BatchApex

Field Name	Details
	• BatchApexWorker • Future • Queueable • ScheduledApex • SharingRecalculation • TestRequest • TestWorker
LastProcessed	Type string Properties Filter, Group, Nillable, Sort Description Last ID that was processed and committed.
LastProcessedOffset	Type int Properties Filter, Group, Nillable, Sort Description Offset of the last ID that was processed and committed.
MethodName	Type string Properties Filter, Group, Nillable, Sort Description The name of the Apex method being executed. Label is <code>Apex Method</code>.
NumberOfErrors	Type int Properties Filter, Group, Nillable, Sort Description Total number of batches with a failure. A batch is considered transactional, so any unhandled exceptions constitute an entire failure of the batch. Label is <code>Failures</code>.
ParentJobId	Type reference Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description For batch Apex jobs that run using chunking implementation, multiple child jobs of type <code>BatchApexWorker</code> are created. Each of these child job records contains the job Id of the parent Apex job that started their execution. For batch Apex jobs that run using a non-chunking implementation, child jobs aren't created.
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The status of the job. Valid values are: • Aborted • Completed • Failed • Holding¹ • Preparing • Processing • Queued ¹ This status applies to batch jobs in the Apex flex queue.
TotalJobItems	Type int Properties Filter, Group, Nillable, Sort Description Total number of batches processed. Each batch contains a set of records. Label is <code>Total Batches</code> .

Usage

Use this object to query Apex batch jobs in your organization.

AsyncOperationLog

Represents an async operations log containing progress and status information about external synchronizations to the Omnichannel Inventory service. This object is available in API version 51.0 and later.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`

Special Access Rules

This object is only available in Omnichannel Inventory orgs.

Fields

Field	Details
AsyncOperationNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The auto-generated number assigned to the operation.
Description	Type string Properties Filter, Group, Nillable, Sort Description Description of the operation.
Error	Type string Properties Filter, Group, Nillable, Sort Description The error message for the operation. Applies only if the operation has an error.
ExternalReference	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The unique external reference ID per type.
FinishedAt	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The date and time the operation finished.
LastStatusUpdateAt	Type dateTime Properties Filter, Nillable, Sort Description The date and time the status of the operation was last updated.
RelatedRecordId	Type reference Properties Filter, Group, Nillable, Sort Description The related record ID for the async request. This field is available in API version 60.0 and later. This field is a polymorphic relationship field. Relationship Name RelatedRecord Relationship Type Lookup Refers To Asset, OrderItemSummary
Request	Type textarea Properties Nillable Description The request sent to the external service.
Response	Type textarea Properties Nillable Description The full response from the external service.

Field	Details
StartedAt	Type dateTime Properties Filter, Nillable, Sort Description The date and time the operation started.
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The status of the operation. Possible values are: - Completed - Error - In Progress - New
Type	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of operation that is being tracked. Possible values are: - CancelAsset—This value is available in API version 60.0 and later. - CreateAsset—This value is available in API version 60.0 and later. - CancelOrderItemSummaries - ImportInventory - LocationManagement - OrderSummaryAdjustmentAggregate

AsyncOperationTracker

Represents the status of an asynchronous request initiated from the Quote, Order, and CreditMemo objects. This object is available in API version 61.0 and later.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
AsyncOperationNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description A string that identifies the operation tracked in AsyncOperationTracker.
CorrelationIdentifier	Type string Properties Filter, Group, Nillable, Sort Description A string that identifies an operation across services.
ExpiresAt	Type dateTime Properties Filter, Nillable, Sort Description The timestamp indicating when this record will be deleted.
FailedJobItems	Type int Properties Filter, Group, Nillable, Sort Description The number of items within the job that have failed.
FinishedAt	Type dateTime Properties Filter, Nillable, Sort Description The timestamp indicating when the asynchronous process completed.

Field	Details
JobType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of job. Possible values are: • <code>ASMAAdServerCheckAvailability</code>. This field is available in API version 66.0 and later. • <code>ASMAAdServerIntegration</code>. This field is available in API version 66.0 and later. • <code>ASMAAddRelatedEntityToAQL</code>. This field is available in API version 66.0 and later. • <code>ASMAApplyMediaPlanTemplateJob</code>. This field is available in API version 66.0 and later. • <code>ASMAApplyTargetingTemplateJob</code>. This field is available in API version 66.0 and later. • <code>ASMCalcLinearMediaSpotPrc</code>. This field is available in API version 66.0 and later. • <code>ASMCreateAmendQuoteJob</code>. This field is available in API version 66.0 and later. • <code>ASMFileProcessorJob</code>. This field is available in API version 66.0 and later. • <code>ASMMediaPlanAsTemplate</code>. This field is available in API version 66.0 and later. • <code>ASMMediaPlanClone</code>. This field is available in API version 66.0 and later. • <code>ASMMediaPlanCopyJob</code>. This field is available in API version 66.0 and later. • <code>AssetizationAsyncJob</code> • <code>AutomatedNegativeInvoiceLineConversion</code> • <code>AutomaticRefunds</code> • <code>CommerceVariationsUpsert</code> • <code>ContextPersistence</code> • <code>CreateCPQContractsJob</code> • <code>CreditMemoDraftToPosted</code>. This field is available in API version 66.0 and later. • <code>CreditMemoRecovery</code>. This field is available in API version 66.0 and later. • <code>DeltaCatalogSyndicationAsyncJob</code> • <code>energyAgreementSetup</code>. This field is available in API version 66.0 and later. • <code>FullCatalogSyndicationAsyncJob</code> • <code>InvoiceBatchRunEmailJob</code>. This field is available in API version 66.0 and later. • <code>InvoiceDocgenJob</code> • <code>InvoiceDocgenPostProcessJob</code> • <code>InvoiceDocgenRetryJob</code> • <code>InvoiceDraftToPosted</code>

Field	Details
	• InvoiceEstimatedTaxCallout. This field is available in API version 66.0 and later. • LoadSalesRecipientData. This field is available in API version 66.0 and later. • MultisiteAutoQuote. This field is available in API version 66.0 and later. • PearAmendQtyAssets—Initiate Amend Quantity • PearCancelAssets—Initiate Cancellation • PearRenewAssets—Initiate Renewal • PlaceOrder • PlaceOrderPersistSync • PlaceOrderPriceAsync • PlaceOrderTaxAsync • PlaceQuote • PlaceQuotePersistAndPriceSync • PlaceQuotePersistSync • PlaceQuotePriceAsync • PlaceQuoteTaxAsync • PreprocessOrder. This field is available in API version 66.0 and later. • PriceRuleDeployment • PriceSheetDeployJob • PSTBaseJob—Top-Level. This field is available in API version 66.0 and later. • PSTConfig—Configuration. This field is available in API version 66.0 and later. • PSTPersist—Save. This field is available in API version 66.0 and later. • PSTPrice. This field is available in API version 66.0 and later. • QuoteToOrderJob • RuleLibraryDeployment • SmsDltTemplateIngestion. This field is available in API version 66.0 and later. • StandaloneBillingSchedulesCreation. This field is available in API version 66.0 and later. • StatementOfAccountGeneration. This field is available in API version 66.0 and later. • StoreRetrieveSyncJob. This field is available in API version 66.0 and later. • TestSerialMessageStepJob. This field is available in API version 66.0 and later. • TransactionLineBom—Create Material Lines • VoidCreditMemo. This field is available in API version 66.0 and later.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user only accessed this record or list view (LastReferencedDate) but not viewed it.
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the user or group that owns the job. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
ParentOperationId	Type reference Properties Filter, Group, Nillable, Sort Description This field is a relationship field. Relationship Name ParentOperation Refers To AsyncOperationTracker
ReferenceEntityId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description Contains the ID of a record associated with the asynchronous request. For example, if the asynchronous request is associated with a credit memo, this field contains the ID of the credit memo. This field is a polymorphic relationship field. Relationship Name ReferenceEntity Refers To CreditMemo, InvoiceBatchRun, Order, Product2, Quote
Request	Type textarea Properties Nillable Description The payload required to process the async request that's populated by internal Salesforce services that use the async framework. This field is available in API version 66.0 and later.
Response	Type textarea Properties Nillable Description Stores the response for each step in the async flow, used in the next steps of the flow until its completion. This field is available in API version 66.0 and later.
SequenceNumber	Type int Properties Filter, Group, Nillable, Sort Description The sequence number associated with each step of a multiple step job, to define the execution order for the async job flow. This field is available in API version 66.0 and later.
StartedAt	Type dateTime Properties Filter, Nillable, Sort Description The timestamp indicating when Salesforce started the asynchronous process.

Field	Details
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The status of the asynchronous request. Possible values are: - Completed - CompletedWithFailures - Failure - InProgress - Submitted
StepName	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Possible values are: - ASMAAdServerCheckAvailability. This field is available in API version 66.0 and later. - ASMAAdServerIntegration. This field is available in API version 66.0 and later. - ASMAAddRelatedEntityToAQL. This field is available in API version 66.0 and later. - ASMAApplyMediaPlanTemplateJob. This field is available in API version 66.0 and later. - ASMAApplyTargetingTemplateJob. This field is available in API version 66.0 and later. - ASMCalcLinearMediaSpotPrc. This field is available in API version 66.0 and later. - ASMCreateAmendQuoteJob. This field is available in API version 66.0 and later. - ASMFileProcessorJob - ASMMediaPlanAsTemplate. This field is available in API version 66.0 and later. - ASMMediaPlanClone. This field is available in API version 66.0 and later. - ASMMediaPlanCopyJob. This field is available in API version 66.0 and later. - AssetizationAsyncJob - AutomatedNegativeInvoiceLineConversion - AutomaticRefunds - CommerceVariationsUpsert - ContextPersistence

Field	Details
	• <code>CreateCPQContractsJob</code> • <code>CreditMemoDraftToPosted</code>. This field is available in API version 66.0 and later. • <code>CreditMemoRecovery</code>. This field is available in API version 66.0 and later. • <code>DeltaCatalogSyndicationAsyncJob</code> • <code>energyAgreementSetup</code>. This field is available in API version 66.0 and later. • <code>FullCatalogSyndicationAsyncJob</code> • <code>InvoiceBatchRunEmailJob</code>. This field is available in API version 66.0 and later. • <code>InvoiceDocgenJob</code> • <code>InvoiceDocgenPostProcessJob</code> • <code>InvoiceDocgenRetryJob</code> • <code>InvoiceDraftToPosted</code> • <code>InvoiceEstimatedTaxCallout</code>. This field is available in API version 66.0 and later. • <code>LoadSalesRecipientData</code>. This field is available in API version 66.0 and later. • <code>MultisiteAutoQuote</code>. This field is available in API version 66.0 and later. • <code>PearAmendQtyAssets—Initiate Amend Quantity</code> • <code>PearCancelAssets—Initiate Cancellation</code> • <code>PearRenewAssets—Initiate Renewal</code> • <code>PlaceOrder</code> • <code>PlaceOrderPersistSync</code> • <code>PlaceOrderPriceAsync</code> • <code>PlaceOrderTaxAsync</code> • <code>PlaceQuote</code> • <code>PlaceQuotePersistAndPriceSync</code> • <code>PlaceQuotePersistSync</code> • <code>PlaceQuotePriceAsync</code> • <code>PlaceQuoteTaxAsync</code> • <code>PreprocessOrder</code>. This field is available in API version 66.0 and later. • <code>PriceRuleDeployment</code> • <code>PriceSheetDeployJob</code> • <code>PSTBaseJob—Top-Level</code>. This field is available in API version 66.0 and later. • <code>PSTCommonSyncStep</code> • <code>PSTConfig</code>. This field is available in API version 66.0 and later. • <code>PSTConfigAndPersist</code>. This field is available in API version 66.0 and later. • <code>PSTOrderTaxAsync</code>. This field is available in API version 66.0 and later. • <code>PSTPersist—Save</code>. This field is available in API version 66.0 and later. • <code>PSTPrice</code>. This field is available in API version 66.0 and later. • <code>PSTPriceAndPersist</code>. This field is available in API version 66.0 and later.

Field	Details
	• <code>PSTQuoteTaxAsync</code>. This field is available in API version 66.0 and later. • <code>QuoteToOrderJob</code> • <code>RuleLibraryDeployment</code> • <code>SmsDltTemplateIngestion</code>. This field is available in API version 66.0 and later. • <code>StandaloneBillingSchedulesCreation</code>. This field is available in API version 66.0 and later. • <code>StatementOfAccountGeneration</code>. This field is available in API version 66.0 and later. • <code>StoreRetrieveSyncJob</code>. This field is available in API version 66.0 and later. • <code>TestSerialMessageStepJob</code>. This field is available in API version 66.0 and later. • <code>TransactionLineBom—Create Material Lines</code> • <code>VoidCreditMemo</code>
<code>SubmittedAt</code>	Type dateTime Properties Filter, Nillable, Sort Description The timestamp indicating when the asynchronous process was submitted by the REST request.
<code>SuccessfulJobItems</code>	Type int Properties Filter, Group, Nillable, Sort Description The number of successful items in this job.
<code>TotalJobItems</code>	Type int Properties Filter, Group, Nillable, Sort Description Total number of items in this job.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AsyncOperationTrackerOwnerSharingRule](#)

Sharing rules are available for the object.

AsyncOperationTrackerShare

Sharing is available for the object.

AsyncOpSyndicationFeedFile

Represents the sync status of file-related information shared with external channels such as Facebook and Instagram. This object is available in API version 64.0 and later.

Supported Calls

describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve()

Special Access Rules

This object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
AsyncOpSyndicationFeedFileNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description ID assigned to each syndication feed file record, and used for tracking and reference purposes.
AsyncOperationTrackerId	Type reference Properties Filter, Group, Nillable, Sort Description ID assigned to the Async Operation Tracker record, which monitors and manages the lifecycle of the syndication process. This field is a relationship field. Relationship Name AsyncOperationTracker Refers To AsyncOperationTracker
FeedContentBody	Type base64

Field	Details
	Properties Nillable Description The content of the feed file that is syndicated to the external platform.
FeedContentContentType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Specifies the format of the feed file to ensure proper processing. For example, CSV, JSON, or XML files.
FeedContentLength	Type int Properties Filter, Group, Nillable, Sort Description The size of the feed file in bytes, which is used for validation and processing requirements.
FeedContentName	Type string Properties Filter, Group, Nillable, Sort Description The name of the feed file, which includes identifiers like timestamp or sequence number.
FeedScope	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Defines the scope or category of the feed. For example, if the feed applies to main, country-specific, or language-specific catalog segments. Possible values are: • CountryFeed • LanguageFeed • MainFeed
LastReferencedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description For internal use only.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description For internal use only.
PlatformConnections	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The external channel or destination for syndication. Possible values are: • Meta
SyncMode	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Specifies the type of sync being performed. Possible values are: • FullSync

AttachedContentDocument

This read-only object contains all `ContentDocument` objects associated with an object.

Supported Calls

`describeSObjects()`

Fields

Field Name	Details
ContentDocumentId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the attached ContentDocument. This is a relationship field. Relationship Name ContentDocument Relationship Type Lookup Refers To ContentDocument
ContentSize	Type int Properties Filter, Group, Nillable, Sort Description The size of the document in bytes for notes smaller than 2 GB. In API version 66.0 and later, we recommend that you use the ContentSizeLong field even for notes smaller than 2 GB.
ContentSizeLong	Type long Properties Filter, Group, Nillable, Sort Description The size of the note in bytes up to 10 GB. This field is available in API version 66.0 and later.
ContentUrl	Type url Properties Filter, Group, Nillable, Sort Description URL for links and Google Docs. This field is set only for links and Google Docs, and is one of the fields that determine the FileType.

Field Name	Details
	This field is available in API version 31.0 and later.
ExternalDataSourceName	Type string Properties Filter, Group, Nillable, Sort Description Name of the external data source in which the document is stored. This field is set only for external documents that are connected to Salesforce. This field is available in API version 32.0 and later.
ExternalDataSourceType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Type of external data source in which the document is stored. This field is set only for external documents that are connected to Salesforce. This field is available in API version 35.0 and later.
FileExtension	Type string Properties Filter, Group, Nillable, Sort Description File extension of the attached ContentDocument. This field is available in API version 31.0 and later.
FileType	Type string Properties Filter, Group, Nillable, Sort Description Type of document, determined by the file extension.
LinkedEntityId	Type reference Properties Filter, Group, Sort

Field Name**Details****Description**

ID of the record the `ContentDocument` is attached to.

This is a relationship field.

Relationship Name

LinkedEntity

Relationship Type

Lookup

Refers To

Account, Accreditation, ActivationTarget, ActivationTrgtIntOrgAccess, ApiAnomalyEventStore, AssessmentIndicatorDefinition, AssessmentTask, AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskIndDefinition, AssessmentTaskOrder, Asset, AssetRelationship, AssignedResource, Award, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, Campaign, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis, CareInterventionType, CareMetricTarget, CareObservation, CareObservationComponent, CarePgmProvHealthcareProvider, CarePreauth, CarePreauthItem, CareProgram, CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee, CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider, CareProgramTeamMember, CareProviderAdverseAction, CareProviderFacilitySpecialty, CareProviderSearchableField, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareSpecialtyTaxonomy, CareTaxonomy, Case, CodeSet, CollaborationGroup, CommSubscription, CommSubscriptionChannelType, CommSubscriptionConsent, CommSubscriptionTiming, ConsumptionSchedule, Contact, ContactEncounter, ContactEncounterParticipant, ContentWorkspace, Contract, ConversationEntry, CoverageBenefit, CoverageBenefitItem, CredentialStuffingEventStore, CreditMemo, CreditMemoLine, Dashboard, DashboardComponent, DataStream, DelegatedAccount, DocumentChecklistItem, EmailMessage, EmailTemplate, EngagementChannelType, EnhancedLetterhead, EnrollmentEligibilityCriteria, Event, HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, Identifier, Image, IndividualApplication, Invoice, InvoiceLine, Lead, ListEmail, Location, MarketSegment, MarketSegmentActivation, MemberPlan, MessagingSession, MktCalculatedInsight, OperatingHours, Opportunity, Order, OrderItem, Organization, OtherComponentTask, PartyConsent, PersonEducation, PersonLanguage, PersonLifeEvent, PersonName, PlanBenefit, PlanBenefitItem, Product2, ProductFulfillmentLocation, ProductItem, ProductItemTransaction, ProductRequest, ProductRequestLineItem, ProductRequired, ProductTransfer, ProfileSkill, ProfileSkillEndorsement, ProfileSkillUser, ProviderSearchSyncLog, PurchaserPlan, PurchaserPlanAssn, ReceivedDocument, Report, ReportAnomalyEventStore, ResourceAbsence, ResourcePreference, ReturnOrder, ReturnOrderLineItem, ServiceAppointment, ServiceResource, ServiceResourceSkill,

Field Name	Details
	ServiceTerritory, ServiceTerritoryMember, ServiceTerritoryWorkType, SessionHijackingEventStore, Shift, Shipment, ShipmentItem, Site, SkillRequirement, SocialPost, Solution, Task, ThreatDetectionFeedback, User, Visit, VisitedParty, Visitor, VoiceCall, VolunteerProject, WorkBadgeDefinition, WorkOrder, WorkOrderLineItem, WorkType, WorkTypeGroup, WorkTypeGroupMember
SharingOption	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Controls whether or not sharing is frozen for a file. Only administrators and file owners with Collaborator access to the file can modify this field. Default is <code>Allowed</code>, which means that new shares are allowed. When set to <code>Restricted</code>, new shares are prevented without affecting existing shares. This field is available in API versions 35.0 and later.
Title	Type string Properties Filter, Group, idLookup, Sort Description Title of the attached <code>ContentDocument</code>.

Usage

Use this object to list all `ContentDocument` objects attached to an object via a feed post.

To retrieve `ContentDocument` objects, issue a describe call on an object, which returns a query result for each activity since the record was created. You can't directly query this object.

AttachedContentNote

This read-only object contains all `ContentNote` objects associated with an object. This object is available in API version 35.0 and later.

Supported Calls

`describeSObjects()`

Special Access Rules

- Notes must be enabled.

- Chatter must be enabled.

Fields

Field Name	Details
ContentDocumentId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the attached ContentNote
ContentSize	Type int Properties Filter, Group, Nillable, Sort Description Size of the note in bytes for notes smaller than 2 GB. In API version 66.0 and later, we recommend that you use the ContentSizeLong field even for notes smaller than 2 GB.
ContentSizeLong	Type long Properties Filter, Group, Nillable, Sort Description The size of the note in bytes up to 10 GB. This field is available in API version 66.0 and later.
FileExtension	Type string Properties Filter, Group, Nillable, Sort Description File extension of the attached ContentNote.
FileType	Type string Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description Type of file for the note. All notes have a file type of <code>SNOTE</code> .
<code>LinkedEntityId</code>	Type reference Properties Filter, Group, Sort Description ID of the record the <code>ContentNote</code> is attached to.
<code>TextPreview</code>	Type string Properties Filter, Group, Nillable, Sort Description A preview of the note, up to 255 characters.
<code>Title</code>	Type string Properties Filter, Group, Sort Description Title of the note.

Usage

Use this object to list all `ContentNote` objects attached to an object.

To retrieve `ContentNote` objects, issue a `describe` call on an object, which returns a `describe` result for each note created or attached. You can't directly query this object.

Attachment

Represents a file that a User has uploaded and attached to a parent object.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Body	Type base64 Properties Create, Update Description Required. Encoded file data.
BodyLength	Type int Properties Filter, Group, Nillable, Sort Description Size of the file (in bytes).
ConnectionReceivedId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the PartnerNetworkConnection that shared this record with your organization. This field is available if you enabled Salesforce to Salesforce.
ConnectionSentId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the PartnerNetworkConnection that you shared this record with. This field is available if you enabled Salesforce to Salesforce. This field is supported using API versions earlier than 15.0. In all other API versions, this field's value is null. You can use the new PartnerNetworkRecordConnection object to forward records to connections.
ContentType	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The content type of the attachment. If the Don't allow HTML uploads as attachments or document records security setting is enabled for your organization, you cannot upload files with

Field	Details
	the following file extensions: <code>.htm</code>, <code>.html</code>, <code>.htt</code>, <code>.htx</code>, <code>.mhtm</code>, <code>.mhtml</code>, <code>.shtm</code>, <code>.shtml</code>, <code>.acgi</code>, <code>.svg</code>. When you insert a document or attachment through the API, make sure that this field is set to the appropriate MIME type.
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Description of the attachment. Maximum size is 500 characters. This field is available in API version 18.0 and later.
IsEncrypted	This information is about Shield Platform Encryption and not Classic Encryption. Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the attachment is encrypted using Shield Platform Encryption (<code>true</code>) or not (<code>false</code>). This field is available in API version 34.0 and later.
IsPartnerShared	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this record is shared with a connection using Salesforce to Salesforce. Label is <code>Is Shared With Partner</code>.
IsPrivate	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this record is viewable only by the owner and administrators (<code>true</code>) or viewable by all otherwise-allowed users (<code>false</code>). During a create or update call, it is possible to mark an Attachment record as private even if you are not the owner. This can result in a situation in which you can no longer access the record that you just inserted or updated. Label is Private. Attachments on tasks or events can't be marked private.

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Name of the attached file. Maximum size is 255 characters. Label is File Name.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the User who owns the attachment. This field isn't required for API version 9.0 or later. The owner of an attachment on a task or event must be the same as the owner of the task or event. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Calendar, User
ParentId	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the parent object of the attachment. The following objects are supported as parents of attachments: • Account • Asset • Campaign • Case • Contact • Contract • Custom objects • EmailMessage • EmailTemplate • Event

Field	Details
	- Lead - Opportunity - Product2 - Solution - Task This is a polymorphic relationship field. Relationship Name Parent Relationship Type Lookup Refers To Account, Accreditation, AssessmentIndicatorDefinition, AssessmentTask, AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskOrder, Asset, Award, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, Campaign, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis, CareMetricTarget, CareObservationComponent, CarePgmProvHealthcareProvider, CareProgram, CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee, CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider, CareProgramTeamMember, CareProviderAdverseAction, CareProviderFacilitySpecialty, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareTaxonomy, Case, CommSubscription, CommSubscriptionChannelType, CommSubscriptionConsent, CommSubscriptionTiming, Contact, Contract, CreditMemo, DelegatedAccount, EmailMessage, EmailTemplate, EngagementChannelType, EnrollmentEligibilityCriteria, Event, HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, IdentityDocument, Image, IndividualApplication, Invoice, Lead, Location, MemberPlan, Opportunity, Order, OtherComponentTask, PersonEducation, PersonLifeEvent, Product2, ProductRequest, ProductRequestLineItem, PurchaserPlan, ReceivedDocument, ServiceAppointment, ServiceResource, Shift, SocialPost, Solution, Task, Visit, VisitedParty, Visitor, VolunteerProject, WorkOrder, WorkOrderLineItem



Note: If you are importing Attachment data and want to set the value for an audit field, such as `CreatedDate`, contact Salesforce. For example, for compliance reasons, you may prefer to set the `CreatedDate` to the date the record was originally created in your system, rather than the date it was imported into Salesforce. Audit fields are automatically updated during API operations unless you request to set these fields yourself.

Usage

The API sends and receives the binary file attachment data encoded as a `base64Binary` data type. Before creating a record, client applications must encode the binary attachment data as `base64`. Upon receiving a response, client applications must decode the `base64` data to binary (this conversion is usually handled for you by the SOAP client).

The create call restricts these files to a maximum size of 25 MB. For a file attached to a Solution, the limit is 1.5 MB. The maximum email attachment size is 3 MB.

The API supports attachments on email in create, delete, or update calls. The query call does not return attachments parented by email, unless the user performing the query has the “Modify All Data” permission.

 Note:

- Attachment records are not searched during text searches.
- When issued by an administrator, the query results include Attachment records from the Recycle Bin.
- When issued by a non-administrator, the `queryAll()` call results do not include Attachment records from the Recycle Bin.

Access to fields depends on the method being used:

- All of the fields are accessible using the `describeObjects()` and `query()` calls. With the `create()` call, you can insert the `Name`, `ParentId`, `Body`, `IsPrivate`, and `OwnerId` fields.
- To modify existing records, the `update()` call gives you access to change the `Name`, `Body`, `IsPrivate`, and `OwnerId` fields.
- You can access all of the fields using a `query()` call. However, you can't receive the `Body` field for multiple records in a single `query()` call. If your query returns the `Body` field, your client application must ensure that only one row with one Attachment is returned; otherwise, an error occurs. A more effective approach is to return IDs (but not Attachment records in the `Body` field) from a `query()` call and then pass them into `retrieve()` calls that return the `Body` field.
- For information about accessing the attachments of archived activities, see Archived Activities.

SEE ALSO:

[Note](#)

AttachmentEventLog

Attachment event logs contain information about attachments. This object is available in API version 65.0 and later.

Supported Calls

`describeObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
<code>AttachmentIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The ID of the attachment.
ContentType	Type string Properties Filter, Group, Nillable, Sort Description The content type of the attachment.
IsPrivateOn	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Whether the attachment is flagged as private or not. The default value is <code>false</code> .
OperationType	Type string Properties Filter, Group, Nillable, Sort Description The operation type of the attachment.
ParentIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the parent object of the attachment. For example, <code>a07EE00001LgsUH</code>
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.
Timestamp	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.

AttribModel

Represents an attribution model used with Personalization, Attribution, and Campaign Influence, including model weights and touch type. This object is available in API version 62.0 and later.

Supported Calls

describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve()

Fields

Field	Details
AttribModelStatus	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Indicates a model's current status. The default value is <code>Draft</code> , and accepted values are • <code>Active</code> • <code>Draft</code> • <code>Inactive</code>
AttributionModelType	Type picklist

Field	Details
	Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the type of attribution model, which determines which touchpoints to evaluate. The default value is <code>LastTouch</code>, and accepted values are • <code>First touch</code> • <code>LastTouch</code>
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Three letter ISO currency codes for supported currencies. The default value is <code>USD</code>. This is an optional field.
DataSpaceId	Type reference Properties Filter, Group, Sort Description Unique identifier that refers to the data space where a model's resources originate. This is a required field. Relationship Name DataSpace Refers To DataSpace
Description	Type String Properties Filter, Group, Nillable, Sort Description Text description of the attribution model. Optional.
DeveloperName	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description Auto-generated or user-generated API name for the attribution model. This is a required field.
Error Code	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the issue that's causing an error. The default value is <code>None</code> , and accepted values are • <code>ConfigurationMissingError</code> indicates that a required configuration setting is missing. • <code>DpcJobError</code> indicates a problem during processing. • <code>InternalError</code> indicates an internal error during processing. • <code>ModelValidationError</code> indicates that the model is invalid. • <code>None</code>
GlobalAttributionWindowDays	Type int Properties Filter, Group, Nillable, Sort Description Defines a timeframe for tracking attribution-related engagement. This is a required field.
IdentityResolutionMode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Defines which identity resolution method to use when tracking engagement activities. Default value is <code>Individual</code> , and acceptable values are • <code>Individual</code> • <code>Unified</code>
IsZeroDayLoadRequired	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Defines whether to sync data before the attribution window begins. The default value is <code>false</code> .
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp that indicates the last time the model was referenced by another resource.
LastRefresh	Type dateTime Properties Filter, Nillable, Sort Description The timestamp that indicates the last time engagement data was refreshed and evaluated by the model.
LastSuccessfulRefresh	Type dateTime Properties Filter, Nillable, Sort Description The timestamp that indicates the last time the model was successfully refreshed.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp that indicates the last time a user viewed the model.
LatestRefreshedStatus	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Picklist value that indicates the status of last refresh process. The default value is <code>None</code> , and accepted values are • Canceled • Complete

Field	Details
	• Failure • None • Processing
ModelContext	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the app or feature in which the attribution model is used. The default value is <code>Personalization</code>, and accepted values are • <code>Attribution</code>: indicates the use with Attribution in Salesforce Personalization. • <code>CampaignInfluence</code>: indicates the use with Campaign Influence in Unified Marketing Analytics. • <code>Personalization</code>: indicates the use with Personalization in Salesforce Personalization.
ModelRevision	Type int Properties Filter, Group, Nillable, Sort Description A version number that indicates the latest save of the model.
Name	Type string Properties Filter, Group, idLookup, Sort Description Text label that identifies the attribution model. This is a required field.
Partner	Type string Properties Filter, Group, Nillable, Sort Description Indicates who's using the model. This field is required if the value of <code>ModelContext</code> is <code>Attribution</code>.
ProfileDataGraphId	Type reference

Field	Details
	Properties Filter, Group, Nillable, Sort Description Unique identifier that refers to the profile data graph that's used with the model. Relationship Name ProfileDataGraph Refers To DataGraph
ScheduledFrequencyMins	Type int Properties Filter, Group, Nillable, Sort Description The scheduled frequency (in minutes) at which the attribution model is processed.
SyncStatus	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Indicates the current status of the attribution model while an action is being performed. The default value is <code>Processing</code>, and acceptable values are: • <code>Active</code> • <code>CreateError</code> • <code>DeleteError</code> • <code>Deleting</code> • <code>EditError</code> • <code>Processing</code>
Tags	Type string Properties Filter, Nillable, Sort Description User-generated strings that can be used to organize attribution models.

Usage

Use this object to get information about attribution models that are in use with personalization and influence features. For example, you can:

- Retrieve status and error details.
- Identify model settings such as type (first-touch, last-touch).
- Find out when the model was last used, refreshed, or synced.

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AttribModelChangeEvent

Change events are available for the object.

AttribModelFeed

Feed tracking is available for the object.

AttribModelHistory

History is available for tracked fields of the object.

AttribModelOwnerSharingRule

Sharing rules are available for the object.

AttribModelShare

Sharing is available for the object.

AttribModelStage

Represents a funnel stage that's used in a predefined or custom attribution configuration. Available in API version 62.0 and later.

Supported Calls

describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve()

Fields

Field	Details
AttribModelId	Type reference
	Properties Filter, Group, Sort
	Description Unique identifier that refers to the attribution configuration that uses this stage. This is a required field.

Field	Details
	Relationship Name AttribModel Relationship Type Master-detail Refers To AttribModel (the master object)
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Three letter ISO currency codes for supported currencies. The default value is <code>USD</code>. This is an optional field.
EngagementSignalEnum	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Picklist value that indicates the engagement signal that's selected for an attribution stage. This value represents a step in a customer journey. The accepted values are the engagement signals that are configured in the selected data space.
IsContentMatchRequired	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether to link item attribution from one funnel stage to the next. The default value is <code>false</code>, meaning not required. If you set this value to <code>true</code>, only engagement with the same item from the previous stage is linkable.
Name	Type string Properties Filter, Group, idLookup, Sort Description Text label that identifies the attribution model stage. This is a required field.

Field	Details
Sequence	Type int Properties Filter, Group, Sort Description Indicates the position of a stage in its journey sequence, reflecting funnel engagement from start to finish. The funnel requires a minimum of two stages, with a maximum of four stages. Accepted values are 1, 2, 3, or 4.
StageUnionGroupName	Type string Properties Filter, Group, Nillable, Sort Description Name of a certain group of stages. It can be used to reference individual, consecutive stages as a combined group with a common name.

Usage

Use this object to create attribution funnel stages. The funnel mirrors key touchpoints of an individual's personalization journey, which you define by selecting an engagement signal and any relevant metrics. The order that you create stages in describes funnel engagement from start to finish.

For example, view a product, click the product, add it to cart, and submit the order. The funnel requires a minimum of two stages, with a maximum of four stages in a journey.

Associated Objects

This object has the these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AttribModelStageChangeEvent](#)

Change events are available for the object.

[AttribModelStageFeed](#)

Feed tracking is available for the object.

[AttribModelStageHistory](#)

History is available for tracked fields of the object.

[AttribModelStageOwnerSharingRule](#)

Sharing rules are available for the object.

[AttribModelStageShare](#)

Sharing is available for the object.

AttribModelStageMetric

Represents the engagement signal metrics that you select when you configure a funnel stage for an attribution configuration. Available in API version 63.0 and later.

Supported Calls

describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve()

Fields

Field	Details
Alias	Type string Properties Filter, Group, Sort Description Indicates the name of the output data metric. This name appears as the column name for the metric on the attribution output table.
AttribModelStageId	Type reference Properties Filter, Group, Sort Description Unique identifier that refers to the attribution configuration stage that uses this metric. Relationship Name AttribModelStage Relationship Type Primary-detail Refers To AttribModelStage (the primary object)
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Three letter ISO currency codes for supported currencies. The default value is <code>USD</code>. This is an optional field.

Field	Details
EngagementSignalMetricId	Type reference Properties Filter, Group, Sort Description Unique identifier that refers to the engagement signal that defines this stage. Relationship Name EngagementSignalMetric Refers To EngagementSignalMetric
Name	Type string Properties Filter, Group, idLookup, Sort Description The text label that identifies the attribution model stage metric.

Usage

An engagement signal metric is an aggregation of an engagement signal data field. These metrics are reported in the attribution model dashboard. For example, sum of clicks on a link, number of products added to a cart, email sends, or distinct article downloads.

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AttribModelStageMetricChangeEvent](#)

Change events are available for the object.

[AttribModelStageMetricFeed](#)

Feed tracking is available for the object.

[AttribModelStageMetricHistory](#)

History is available for tracked fields of the object.

[AttribModelStageMetricOwnerSharingRule](#)

Sharing rules are available for the object.

[AttribModelStageMetricShare](#)

Sharing is available for the object.

AttributeDefinition

Represents a product, asset, or object attribute, for example, a hardware specification or software detail. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
<code>DataType</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The data type of the attribute definition. Possible values are: • Checkbox • Date • Datetime • Number • Picklist • Text
<code>DefaultValue</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The default value for this attribute.
<code>Description</code>	Type textarea Properties Create, Nillable, Update

Field	Details
	Description Description of this attribute.
DeveloperName	Type string Properties Create, Filter, Group, Sort Description The unique name of the attribute definition record. This name must begin with a letter and use only alphanumeric characters and underscores. It can't include spaces, end with an underscore, or have two consecutive underscores. The developer name is used for internal purpose and must be unique for all records (including deleted records). If the system doesn't find the name unique, it automatically overrides the user input and creates a unique name. For external use, the developer name need not be fixed.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates that the attribute definition is active. Active attributes definitions can be selected for assets. The default value is <code>false</code> .
IsRequired	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the attribute definition is required for an asset. The default value is <code>false</code> .
Label	Type string Properties Create, Filter, Group, Sort, Update Description The label for the attribute. Displays a friendly name for the attribute, for example, threshold monitor lightning component and recordset filter criteria rule .

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the attribute definition was last referenced.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the attribute definition was last viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the attribute.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the attribute definition. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PicklistId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the attribute picklist with the valid values for this attribute.

Field	Details
	This field is a relationship field. Relationship Name Picklist Relationship Type Lookup Refers To AttributePicklist
SourceSystemIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The identifier of the attribute definition in an external system.
UnitOfMeasureId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the measurement unit for this attribute. This field is a relationship field. Relationship Name UnitOfMeasure Relationship Type Lookup Refers To UnitOfMeasure

Usage

Add asset descriptors to the Asset object instead of creating multiple custom attributes on an asset. This helps scale to a high volume of various assets in the system. When you create the AttributeDefinition, you can provide a unique API name. If the API name is not unique, the system appends a number to the end of the API name. The value of this number depends on how many times the same name has been used.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AttributeDefinitionHistory on page 63

History is available for tracked fields of the object.

AttributeDefinitionOwnerSharingRule on page 65

Sharing rules are available for the object.

AttributeDefinitionShare on page 67

Sharing is available for the object.

SEE ALSO:

- [AssetAttribute](#)
- [AttributePicklist](#)
- [AttributePicklistValue](#)
- [RecordsetFiltrCritMonitor](#)

AttributePicklist

Represents a custom picklist for an asset attribute. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
DataType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The data type of this picklist. Possible values are: • Boolean • Currency • Date • Datetime • Number

Field	Details
	- Percent - Text The default value is <code>Boolean</code>.
Description	Type textarea Properties Create, Nillable, Update Description A description of the picklist. Maximum size is 32000 alphanumeric characters. Can include the following special characters: @! - < > * ? + = % # () / \ & ' £ € \$ ".
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the attribute picklist was last referenced.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the attribute picklist was last viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the picklist. Names must be unique.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of the attribute picklist record. This field is a polymorphic relationship field.

Field	Details
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
Status	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The status of the attribute picklist. Possible values are: • Active • Draft • Inactive The default value is <code>Draft</code> .
UnitOfMeasureId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The ID of the unit of measure associated with the product. This field is a relationship field. This field is available when Revenue Cloud is enabled. This field is available in API version 63.0 and later.
	Relationship Name UnitOfMeasure
	Refers To UnitOfMeasure

Usage

The AttributePicklist object is the parent object and the AttributePicklistValue object contains the picklist values. Let's say you need an asset attribute to track the T-shirt size, which can be small, medium, or large. Create an AttributePicklist parent record as a Text type for the T-shirt size attribute. Then create AttributePicklistValue records, one for each picklist value small, medium, and large, and associate them with the parent record.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AttributePicklistHistory on page 63

History is available for tracked fields of the object.

AttributePicklistOwnerSharingRule on page 65

Sharing rules are available for the object.

AttributePicklistShare on page 67

Sharing is available for the object.

SEE ALSO:

- [AssetAttribute](#)
- [AttributeDefinition](#)
- [AttributePicklistValue](#)
- [RecordsetFiltrCritMonitor](#)

AttributePicklistValue

Represents the values of an asset attribute picklist. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
Abbreviation	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A short name of the picklist value that's displayed at run time. Use up to 255 alphanumeric characters. Can include the following special characters: @ ! - < > * ? + = % # () / \ & ' £ € \$ " .

Field	Details
Code	Type string Properties Create, Filter, Group, Sort, Update Description A picklist value code unique to the picklist. Maximum size is 80 alphanumeric characters. Can include the following special characters: @ ! - < > * ? + = % # () / \ & ' £ € \$ ".
DisplayValue	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The displayed picklist value if it's different from the Name field. For example, the Name '5' could have a DisplayValue 'Five'.
IsDefault	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the picklist value is the default for the associated picklist. Only one value can be the default for a picklist. The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the attribute picklist value was last referenced.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the attribute picklist value was last viewed.
Name	Type string

Field	Details
	Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the attribute picklist value.
PicklistId	Type reference Properties Create, Filter, Group, Sort Description The ID of the picklist that the value is associated with. This field is a relationship field. Relationship Name Picklist Relationship Type Lookup Refers To AttributePicklist
Sequence	Type double Properties Create, Filter, Nillable, Sort, Update Description The order in which the picklist value appears in the picklist.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The status of the attribute picklist value. Possible values are: • Active • Draft • Inactive The default value is Draft.
Value	Type string

Field	Details
	Properties Create, Filter, Group, Sort, Update
	Description The text value for a picklist item if the picklist data type is text. This value must be unique within a picklist. Maximum size is 255 alphanumeric characters. Can include the following special characters: @ ! - < > * ? + = % # () / \ & ' £ € \$ ".

Usage

The AttributePicklistValue object is the child object and the AttributePicklist object contains the picklist. Let's say you need an asset attribute to track the T-shirt size, which can be small, medium, or large. Create an AttributePicklist parent record as a Text type for the T-shirt size attribute. Then create AttributePicklistValue records, one for each picklist value small, medium, and large, and associate them with the parent record..

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AttributePicklistValueHistory on page 63

History is available for tracked fields of the object.

SEE ALSO:

[AssetAttribute](#)

[AttributeDefinition](#)

[AttributePicklist](#)

[RecordsetFiltrCritMonitor](#)

AsyncReportRunEventLog

Async Report Run Event Log is used for reporting scheduled requests. This category includes dashboard refreshes, asynchronous reports, schedule reports, and analytics snapshots. This object is available in API version 61.0 and later.



Note: This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
AverageRowSize	Type double Properties Filter, Nillable, Sort Description The average row size (in bytes) of all rows in the Asynchronous Report Run event.
BucketCount	Type int Properties Filter, Group, Nillable, Sort Description The number of buckets used in the report.
ClientIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.
ColumnCount	Type int Properties Filter, Group, Nillable, Sort Description The number of columns in the report.
CpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DashboardIdentifier	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The ID of the dashboard that was run.
DatabaseBlocks	Type double Properties Filter, Nillable, Sort Description How much activity is occurring in the database.
DatabaseCpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time (in milliseconds) to complete the request.
DatabaseTotalTime	Type double Properties Filter, Nillable, Sort Description Total time spent in OracleJdbc calls, counting the Jdbc driver, Network, and Oracle time for execs, fetches, and get-connection.
DisplayType	Type string Properties Filter, Group, Nillable, Sort Description Possible values are: • D—Dashboard • S—Show Details • H—Hide Details
ExceptionFilterCount	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of exception filters used in the report.
IsPreview	Type boolean Properties Defaulted on create, Filter, Group, Sort Description This field is reserved for future use. The default value is <code>false</code> .
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCSym5eyvtEK2I.
ObjectName	Type string Properties Filter, Group, Nillable, Sort Description The name of the object affected by the trigger.
Origin	Type string Properties Filter, Group, Nillable, Sort Description Where the report is being executed, such as from a UI (Classic, Lightning, Mobile), through an API (synchronous, asynchronous, Apex), or through a dashboard.
RenderingType	Type string Properties Filter, Group, Nillable, Sort Description Describes the format of the report output in Salesforce Classic. If the report was exported in Lightning Experience, this field is blank.

Field	Details
ReportIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The report's ID.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestIdentifier</code>. For example: 3nWgxWbDKWWDiK0FKf5DV.
RequestStatus	Type String Description The status of the request for a page view or user interface action. For example: • S—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned. • F—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only. • U—Undefined • A—Authorization Error • R—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page. • N—Not Found. 404 error. This field can have a blank value.
RowCount	Type int Properties Filter, Group, Nillable, Sort Description The number of rows that were processed in the Asynchronous Report Run event.
RunTime	Type double

Field	Details
	Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
SortOrder	Type string Properties Filter, Group, Nillable, Sort Description The sort column and order that was used in the report.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: /home/home.jsp.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.
UserType	Type string Properties Filter, Group, Nillable, Sort Description The category of user license. Possible values are: • CsnOnly—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users. • CspLitePortal—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site. • CustomerSuccess—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. • Guest—Users whose access is limited so that your customers can view and interact with your site without logging in. • PowerCustomerSuccess—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy. • PowerPartner—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site. • SelfService—Users whose access is limited because they're organization customers and access the application through a self-service portal. • Standard—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

Audience

Represents an audience that is defined by criteria and can be assigned and used for targeting in an Experience Cloud site. This object is available in API version 44.0 and later.

Supported Calls

`delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`

Fields

Field	Details
AudienceName	Type string Properties Filter, Group, Sort, Update Description Name of the audience.
ContainerId	Type reference Properties Filter, Group, Sort Description ID of the site or org that contains the audience. ContainerId is nillable in API versions 47.0 and earlier.
Description	Type string Properties Filter, Group, Nillable, Sort, Update Description Description of the audience.
DeveloperName	Type string Properties Filter, Group, Sort, Update Description The unique name of the audience in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. This field is automatically generated, but you can supply your own value if you create the record using the API.  Note: When creating large sets of data, always specify a unique DeveloperName for each record. If no DeveloperName is specified, performance may slow while Salesforce generates one for each record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
FormulaFilterType	Type picklist

Field	Details
	Properties Filter, Group, Nillable, Restricted picklist, Sort, Update Description Formula filter for the criteria used to define the audience. Valid values are: • <code>AllCriteriaMatch</code>—Matching all the conditions (AND). • <code>AnyCriterionMatches</code>—Matching at least one condition (OR). • <code>CustomLogicMatches</code>—Matching condition logic (AND and OR) and numbered criteria groups. This value is available in API version 45.0 and later.
Language	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort, Update Description Language of the audience. Valid values are: • Chinese (Simplified): <code>zh_CN</code> • Chinese (Traditional): <code>zh_TW</code> • Danish: <code>da</code> • Dutch: <code>nl_NL</code> • English: <code>en_US</code> • Finnish: <code>fi</code> • French: <code>fr</code> • German: <code>de</code> • Italian: <code>it</code> • Japanese: <code>ja</code> • Korean: <code>ko</code> • Norwegian: <code>no</code> • Portuguese (Brazil): <code>pt_BR</code> • Russian: <code>ru</code> • Spanish: <code>es</code> • Spanish (Mexico): <code>es_MX</code> Spanish (Mexico) defaults to Spanish for customer-defined translations. • Swedish: <code>sv</code> • Thai: <code>th</code> The Salesforce user interface is fully translated to Thai, but Help is in English.
MasterLabel	Type string Properties Filter, Group, Sort, Update

Field	Details
	Description Master label for the audience. This internal name doesn't get translated.

AuraDefinition

Represents an Aura component definition, such as component markup, a client-side controller, or an event. This object is available in API version 32.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, only your Salesforce org's internal users can access this object.

Fields

Field Name	Details
<code>AuraDefinitionBundleId</code>	Type reference Properties Create, Filter, Group, Sort Description The ID of the bundle containing the definition. A bundle contains a Lightning definition and all its related resources. This is a relationship field. Relationship Name AuraDefinitionBundle Relationship Type Lookup Refers To AuraDefinitionBundle
<code>DefType</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update

Field Name	Details
	Description The definition type. Valid values are: • APPLICATION — Lightning Aura Components app • CONTROLLER — client-side controller • COMPONENT — component markup • EVENT — event definition • HELPER — client-side helper • INTERFACE — interface definition • RENDERER — client-side renderer • STYLE — style (CSS) resource • PROVIDER — reserved for future use • MODEL — deprecated, do not use • TESTSUITE — reserved for future use • DOCUMENTATION — documentation markup • TOKENS — tokens collection • DESIGN — design definition • SVG — SVG graphic resource • MODULE — reserved for future use
Format	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The format of the definition. Valid values are: • XML for component markup • JS for JavaScript code • CSS for styles • TEMPLATE_CSS reserved for future use • SVG for an SVG graphic
Source	Type textarea Properties Create, Update Description The contents of the definition. This is all the markup or code for the definition.

Usage

For more information, see the [Lightning Aura Components Developer Guide](#).

AuraDefinitionBundle

Represents a Lightning Aura component definition bundle, such as a component or application bundle. A bundle contains a Lightning Aura component definition and all its related resources. This object is available in API version 32.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
ApiVersion	Type double Properties Create, Filter, Sort, Update Description The API version for this bundle. Every bundle has an API version specified at creation.
Description	Type textarea Properties Create, Filter, Group, Sort, Update Description The text description of the bundle. Maximum size of 255 characters.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the record in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. This field is automatically generated but you can supply your own value if you create the record using the API.

Field Name	Details
	 Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance may slow while Salesforce generates one for each record.  Note: Only users with View <code>DeveloperName</code> OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the <code>MasterLabel</code>.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Master label for the Lightning bundle. This internal label doesn't get translated.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.

Usage

For more information, see the [Lightning Aura Components Developer Guide](#).

AuraDefinitionBundleInfo

For internal use only.

AuraDefinitionInfo

For internal use only.

AuraRequestEventLog

Aura Request Event Log contains details of requests to Apex methods from Aura and Lightning web components. This object is available in API version 61.0 and later.

 **Note:** This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
ActionMessage	Type string Properties Filter, Group, Nillable, Sort Description The action (Apex method) names and times for all the actions in the request in the format. Forexample: <code>action1Name=action1Time;action2Name=action2Time...</code>
ClientIp	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
CpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DatabaseTotalTime	Type double Properties Filter, Nillable, Sort Description The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and DatabaseCpuTime. Compare this field to CpuTime to determine whether performance issues are occurring in the database layer or in your own code.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same RequestIdentifier. For example: 3nWgxWbDKWWDiK0FKfF5DV.
RequestMethod	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The HTTP method of the request, such as <code>GET</code> or <code>POST</code>.
RequestStatus	Type String Description The status of the request for a page view or user interface action. For example: • <code>S</code>—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned. • <code>F</code>—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only. • <code>U</code>—Undefined • <code>A</code>—Authorization Error • <code>R</code>—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page. • <code>N</code>—Not Found. 404 error. This field can have a blank value.
RunTime	Type double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: <code>d7DEq/ANa7nNZZVD</code>.
Timestamp	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: /home/home.jsp.
UserAgent	Type string Properties Filter, Group, Nillable, Sort Description The numeric code for the type of client used to make the request (for example, the browser, application, or API) as a string.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.
UserType	Type string Properties Filter, Group, Nillable, Sort Description The category of user license. Possible values are: • <code>CsnOnly</code>—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users. • <code>CspLitePortal</code>—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site. • <code>CustomerSuccess</code>—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal.

Field	Details
	• Guest—Users whose access is limited so that your customers can view and interact with your site without logging in. • PowerCustomerSuccess—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy. • PowerPartner—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site. • SelfService—Users whose access is limited because they're organization customers and access the application through a self-service portal. • Standard—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

AuthConfig

Represents authentication options for My Domain and Experience Cloud site login pages. This object is available in API version 32.0 and later.

The fields for this object control the options that display on the login page of an org. By default, you have a My Domain and corresponding login page. If you use Digital Experiences, you can also set up a login page for each of your Experience Cloud sites.

- Logging in with a username and password
- Using SAML for single sign-on
- Authentication provider logins from a third-party service, such as Facebook or Twitter

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

You must have "View Setup and Configuration" permission to view the settings.

Fields

Field Name	Details
<code>AuthOptionsAuthProvider</code>	Type boolean Properties Filter

Field Name	Details
	Description If <code>true</code>, at least one Auth. Provider is selected to show up on the login page, and this object has child <code>AuthConfigProvider</code> objects for each provider.
<code>AuthOptionsCertificate</code>	Type boolean Properties Filter Description If <code>true</code>, certificate-based login displays on the My Domain login page.
<code>AuthOptionsSaml</code>	Type boolean Properties Filter Description If <code>true</code>, at least one SAML configuration is selected to show up on the login page. If the organization has only one SAML configuration, this value indicates whether that configuration is selected to show up on the login page. If the organization has multiple SAML configurations, see the child <code>AuthConfigProvider</code> objects for each configuration.
<code>AuthOptionsUsernamePassword</code>	Type boolean Properties Filter Description If <code>true</code>, the login option for a username and password appears on the login page.
<code>DeveloperName</code>	Type string Properties Filter, Group, Sort Description The name of the domain created using My Domain or, for an Experience Cloud site, a concatenated string of <code>site name_site prefix</code>.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.

Field Name	Details
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Whether this configuration is in use.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language for the organization.
MasterLabel	Type string Properties Filter, Group, Sort Description The text that's used to identify the Visualforce page in Setup.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.

Field Name	Details
Type	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The organization type for this object. • Org (includes custom domains) • Community • Site • Portal
Url	Type string Properties Filter, Group, idLookup, Sort Description The login URL of the organization for this AuthConfig object. Each URL has only one associated AuthConfig object.

AuthConfigProviders

Represents an authentication provider that's configured in an organization. AuthConfigProviders is a child of the AuthConfig object. This object is available in API version 32.0 and later.

This object links the authentication configuration for an organization to the Auth Provider through the `AuthOptionsAuthProvider` field of the [AuthConfig](#) object. The login page of a My Domain or Experience Cloud site can allow multiple SAML configurations and multiple authentication providers. These configurations can be set to show up as buttons on the login page. Each configuration has an AuthConfigProvider object. For more information about how to display these configurations on the login page, see these resources in Salesforce Help.

- My Domain: [Add Identity Providers to the My Domain Login Page](#)
- Experience Cloud: [Configure Your Login Page](#)

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`

Special Access Rules

You must have "View Setup and Configuration" permission to view the settings.

Fields

Field Name	Details
AuthConfigId	Type reference Properties Create, Filter, Group, Sort Description The ID for this configuration. This is a relationship field. Relationship Name AuthConfig Relationship Type Lookup Refers To AuthConfig
AuthProviderId	Type reference Properties Create, Filter, Group, Sort Description The ID of the Auth. Provider or SAML configuration. This is a polymorphic relationship field. Relationship Name AuthProvider Relationship Type Lookup Refers To AuthProvider, SamlSsoConfig

AuthorizationForm

Represents the specific version and effective dates of a form that is associated with consent, such as a privacy policy or terms and conditions. This object is available in API version 46.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available if Data Protection and Privacy is enabled.

Fields

Field Name	Details
DefaultAuthFormTextId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Required. The ID of the default authorization form text to use if text isn't available for a specific language. This is a relationship field. Relationship Name DefaultAuthFormText Relationship Type Lookup Refers To AuthorizationFormText
EffectiveFromDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date when the authorization form takes effect.
EffectiveToDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date when the authorization form is no longer in effect.
IsSignatureRequired	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the authorization form requires a signature.

Field Name	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. The name of the authorization form.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of the account associated with this customer. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
RevisionNumber	Type string

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The revision number of the authorization form. For example, "rev1.21."

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[AuthorizationFormChangeEvent](#) (API version 61.0)

Change events are available for the object.

[AuthorizationFormHistory](#)

History is available for tracked fields of the object.

[AuthorizationFormOwnerSharingRule](#)

Sharing rules are available for the object.

[AuthorizationFormShare](#)

Sharing is available for the object.

AuthorizationFormConsent

Represents the date and way in which a user consented to an authorization form. This object is available in API version 46.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available if Data Protection and Privacy is enabled.

Fields

Field Name	Details
<code>AuthorizationFormTextId</code>	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description Required. The authorization form text that the Individual consented to.

Field Name	Details
	This is a relationship field. Relationship Name AuthorizationFormText Relationship Type Lookup Refers To AuthorizationFormText
ConsentCapturedDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Required. The date and time that consent was given.
ConsentCapturedSource	Type string Properties Create, Filter, Group, Nillable Sort, Update Description Required. The source through which consent was captured. For example, user@example.com, www.example.com.
ConsentCapturedSourceType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Required. The source type through which consent was captured. For example, phone, email, or website.
ConsentGiverId	Type reference Properties Create, Filter, Group, Sort, Update Description Required. The ID of the person consenting to the authorization form. This is a polymorphic relationship field. Relationship Name ConsentGiver

Field Name	Details
	Relationship Type Lookup Refers To Account, CareProgramEnrollee, Contact, Individual, User
DocumentVersionId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the document version for which consent is given. This is a relationship field. Relationship Name DocumentVersion Relationship Type Lookup Refers To ContentVersion
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update

Field Name	Details
	Description Required. The name of the authorization form consent.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Required. The ID of the owner of the account associated with this customer. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
RelatedRecordId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of a record showing consent of an authorization form. This is a polymorphic relationship field. Relationship Name RelatedRecord Relationship Type Lookup Refers To Account, Visit
Status	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The status of the authorization form. Possible values are: • Rejected • Seen

Field Name	Details
	Signed
PartyId	Type reference Properties Create, Filter, Group, Sort Description This field was removed in API version 47.0. Use <code>ConsentGiverId</code> instead.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AuthorizationFormConsentChangeEvent](#) (API version 47.0)

Change events are available for the object.

[AuthorizationFormConsentHistory](#)

History is available for tracked fields of the object.

[AuthorizationFormConsentOwnerSharingRule](#)

Sharing rules are available for the object.

[AuthorizationFormConsentShare](#)

Sharing is available for the object.

AuthorizationFormDataUse

Represents the data use consented to in an authorization form. This object is available in API version 46.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available if Data Protection and Privacy is enabled.

Fields

Field Name	Details
AuthorizationFormId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Sort, Update Description Required. The ID of the associated authorization form record. This is a relationship field. Relationship Name AuthorizationForm Relationship Type Lookup Refers To AuthorizationForm
DataUsePurposeId	Type reference Properties Create, Filter, Group, Sort, Update Description Required. Identifies the data use purpose record associated with the authorization form. This is a relationship field. Relationship Name DataUsePurpose Relationship Type Lookup Refers To DataUsePurpose
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field Name	Details
	Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. The name of the authorization form data use.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of the account associated with this customer. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[AuthorizationFormDataUseChangeEvent](#) (API version 62.0)

Change events are available for the object.

[AuthorizationFormDataUseHistory](#)

History is available for tracked fields of the object.

[AuthorizationFormDataUseOwnerSharingRule](#)

Sharing rules are available for the object.

[AuthorizationFormDataUseShare](#)

Sharing is available for the object.

AuthorizationFormText

Represents an authorization form's text and language settings. This object is available in API version 46.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available if Data Protection and Privacy is enabled.

Fields

Field Name	Details
AuthorizationFormId	Type reference Properties Create, Filter, Group, Sort Description Required. The ID of the associated authorization form record. This is a relationship field. Relationship Name AuthorizationForm Relationship Type Lookup Refers To AuthorizationForm
ContentDocumentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the ContentDocument that provides the authorization form's text. This is a relationship field. Relationship Name ContentDocument Relationship Type Lookup

Field Name	Details
	Refers To ContentDocument
DetailAuthorizationFormText	Type textarea Properties Create, Nillable, Update Description A detailed version of the authorization form.
FullAuthorizationFormUrl	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The URL where the full text of the authorization form is located.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
Locale	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The combined language and locale ISO code that control the language of the authorization form text. <code>Locale</code> and <code>LocaleSelection</code> have the same function.

Field Name	Details
	 Note: <code>Locale</code> can contain custom values not included in the picklist if added before version 47.0.
<code>LocaleSelection</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The combined language and locale ISO code that control the language of the authorization form text. <code>Locale</code> and <code>LocaleSelection</code> have the same function.
<code>Name</code>	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. The name of the authorization form text.
<code>SummaryAuthFormText</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A shortened version of the authorization form that is displayed to the user.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[AuthorizationFormTextChangeEvent](#) (API version 61.0)

Change events are available for the object.

[AuthorizationFormTextHistory](#)

History is available for tracked fields of the object.

AuthProvider

Represents an authentication provider (auth provider). An auth provider lets users log in to your Salesforce org from an external service provider, such as Facebook, Google, or GitHub. This object is available in API version 27.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Only users with Customize Application and Manage AuthProviders permissions can access this object.

Fields

Field Name	Details
AppleTeam	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Required when using Apple as a third-party authentication provider. A 10-character team ID, obtained from an Apple developer account. Available in API version 48.0 and later.
AuthorizeUrl	Type url Properties Create, Filter, Nillable, Sort, Update Description Required when creating an OpenID Connect authentication provider. The OAuth authorization endpoint URL. Available in API version 29.0 and later. In API version 33.0 and later, for Salesforce-managed auth providers, leave the field blank to let Salesforce supply and manage the value.
ConsumerKey	Type string Properties Create, Filter, Nillable, Sort, Update Description The app's key that is registered at the third-party (external) authentication provider. In API version 33.0 and later, for Salesforce-managed auth providers, leave the field blank to let Salesforce supply and manage the value.
ConsumerSecret	Type string Properties Create, Nillable

Field Name	Details
	Description The consumer secret of the authentication provider that is registered at the third-party SSO provider. It's used by the consumer for identification to Salesforce. In API version 33.0 and later, for Salesforce-managed auth providers, leave the field blank to let Salesforce supply and manage the value. You can create your own consumer secret on <code>create()</code>. However, after you set it, you can't change the value.
CustomMetadataTypeRecord	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Required when creating a custom authentication provider plug-in. The API name of the custom authentication provider. Available in API version 36.0 and later.
DefaultScopes	Type string Properties Create, Filter, Nillable, Sort, Update Description For OpenID Connect authentication providers, the scopes to send with the authorization request, if not specified when a flow starts. Available in API version 29.0 and later. In API version 33.0 and later, for Salesforce-managed auth providers, leave the field blank to let Salesforce supply and manage the value.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description Required. Used when referring to the authentication provider from a program.
EcKey	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Required when using Apple as a third-party authentication provider. Available in API version 48.0 and later.

Field Name	Details
ErrorUrl	Type string Properties Create, Filter, Nillable, Sort, Update Description A custom error URL for the authentication provider to use to report errors.
ExecutionUserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Required to specify a registration handler. The username of the Salesforce admin or system user who runs the Apex handler or flow. The execution user provides the context in which the registration handler runs. For example, if the handler creates a contact, the creation can be easily traced back to the registration process. In production, use a system user. The user must have the Manage Users permission. Available in API version 27.0 and later.
FlowDefaultAccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description For authentication providers that use a flow registration handler, the default account that new external users are assigned to. If you include this field, Salesforce automatically uses it for the <code>defaultAccountId</code> variable in the Authentication Provider User Registration standard flow. A default account is required to use a flow registration handler for external users. You can specify a default account here or in the flow itself. If you use both, the default account that's configured in the flow takes precedent. Available in API version 64.0 and later.
FlowDefaultProfileId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description For authentication providers that use a flow registration handler, the default profile that new users are assigned to. If you include this field, Salesforce automatically uses it for the <code>defaultProfileId</code> variable in the Authentication Provider User Registration standard flow.

Field Name	Details
	A default profile is required to use a flow registration handler. You can specify a default profile here or in the flow itself. If you use both, the default profile that's configured in the flow takes precedent. Available in API version 64.0 and later.
FriendlyName	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. A user-friendly name for the authentication provider.
IconUrl	Type url Properties Create, Filter, Nillable, Sort, Update Description The path to an icon to use as a button on the login page. Users click the button to log in with the associated authentication provider, such as Twitter or Facebook. Available in API version 32.0 and later.
IdTokenIssuer	Type string Properties Create, Filter, Nillable, Sort, Update Description The source of the authentication token in <code>https:</code> URI format. This field is available when configuring an OpenID Connect or Microsoft authentication provider. If provided, Salesforce validates the returned <code>id_token</code> value. OpenID Connect requires returning an <code>id_token</code> value with the <code>access_token</code> value. Available in API version 30.0 and later.
LinkKickoffUrl	Type url Properties Nillable Description The URL for linking existing Salesforce users to a third-party account. This field is read-only. Available in API version 43.0 and later.
LogoutUrl	Type url

Field Name	Details
	Properties Create, Filter, Nillable, Sort, Update Description The destination for users after they log out if they authenticated using single sign-on. The URL must be fully qualified with an http or https prefix, such as <code>https://acme.my.salesforce.com</code>. Available in API version 33.0 and later.
OAuthKickoffUrl	Type url Properties Nillable Description The URL for obtaining OAuth access tokens for a third party. This field is read-only. Available in API version 43.0 and later.
OptionsIncludeOrgIdInId	Type boolean Properties Create, Filter, Update Description Used to differentiate between users with the same user ID from two sources (such as two sandboxes). If enabled (<code>true</code>), Salesforce stores the org ID of the third-party identity in addition to the user ID. After you enable this setting, you can't disable it. Applies only to a Salesforce-managed auth provider. Available in API version 32.0 and later.
OptionsIsPkceEnabled	Type boolean Properties Create, Filter, Update Description If set to <code>true</code>, the authentication provider uses the OAuth 2.0 Proof Key for Code Exchange (PKCE) extension, which improves the security of the provider's authorization flow. This field applies only to these <code>providerType</code> values: • Custom • Facebook • Google • Microsoft • OpenIdConnect • Salesforce.

Field Name	Details
	This field is available in API version 59.0 and later.
OptionsRequireMfa	Type boolean Properties Filter Description Requires multi-factor authentication (MFA) for single sign-on with this auth provider based on the MFA status of each user. For this setting to trigger MFA, you must apply MFA directly to users via one of two methods. 1) Assign the user permission Multi-Factor Authentication for User Interface Logins. 2) Enable the org setting Require multi-factor authentication (MFA) for all direct UI logins to your Salesforce org.
OptionsSendAccessTokenInHeader	Type boolean Properties Create, Filter, Update Description If enabled (<code>true</code>), the access token is sent to the <code>UserInfoUrl</code> in a header instead of a query string. Available in API version 30.0 and later.
OptionsSendClientCredentialsInHeader	Type boolean Properties Create, Filter, Update Description Required when creating an OpenID Connect authentication provider. If enabled (<code>true</code>), the client credentials are sent in a header to the <code>tokenUrl</code> instead of a query string. The credentials are in the standard OpenID Connect Basic Credentials header format, which is <code>Basic <token></code>, where <code><token></code> is the base64-encoded string <code>"clientkey:clientsecret"</code>. Available in API version 30.0 and later.
OptionsSendSecretInApis	Type boolean Properties Create, Filter, Update Description Determines whether the encrypted consumer secret appears in API responses. If enabled (default), the secret appears in the response. If disabled (<code>false</code>),

Field Name	Details
	responses don't include the consumer secret. For security, you can disable the setting. However, keep in mind that: • By disabling this setting, the consumer secret is excluded from API responses in all API versions. • Change sets and other metadata deployments break because both the consumer key and secret are expected. To fix this problem, insert the consumer key manually during deployment. Available in API version 47.0 and later.
PluginId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description An existing Apex class that extends the <code>Auth.AuthProviderPluginClass</code> abstract class. Available in API version 39.0 and later.
ProviderType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. The third-party authentication provider to use. Valid values include: • <code>Apple</code>. Available in API version 48.0 and later. • <code>Bitbucket</code>—Provides authentication for a <code>Bitbucket</code> provider. Enables you to connect to Bitbucket from a Lightning Platform application. When logged in to Bitbucket, the app can make calls to Bitbucket APIs. The <code>Bitbucket</code> provider isn't available as an SSO provider, so users can't log in to a Salesforce org using their Bitbucket login credentials. Available in API version 61.0 and higher. • <code>Custom</code>—A provider configured with a custom authentication provider plug-in. Available in API version 36.0 and later. • <code>Facebook</code>. • <code>GitHub</code>—Provides authentication for a <code>GitHub</code> provider. Used to log in users of your Lightning Platform app to GitHub using OAuth. When logged in to GitHub, your app can make calls to GitHub APIs. The <code>GitHub</code> provider isn't available as an SSO provider, so users can't log in to your Salesforce org using their GitHub login credentials. Available in API version 35.0 and later. • <code>Google</code>. • <code>Janrain</code>. • <code>LinkedIn</code>. Available in API version 32.0 and later.

Field Name	Details
	• Microsoft. Provides authentication for all services that can be accessed via Microsoft Azure Active Directory. Available in API version 55.0 and later. • MicrosoftACS—Microsoft Access Control Service provides authentication for a Microsoft Office 365 service, like SharePoint Online. The MicrosoftACS provider doesn't support SSO. Available in API version 31.0 and later. • OpenIdConnect. Available in API version 29.0 and later. • Salesforce. • Slack. Available in API version 54.0 and later. • Twitter. Available in API version 32.0 and later.
RegistrationHandlerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description An existing Apex class that implements the <code>Auth.RegistrationHandler</code> interface.
SsoKickoffUrl	Type url Properties Nillable Description The URL for performing SSO into Salesforce from a third party by using its third-party credentials. This field is read-only. Available in API version 43.0 and later.
TokenUrl	Type url Properties Create, Filter, Nillable, Sort, Update Description The OAuth token endpoint URL of an OpenID Connect authentication provider. Available in API version 29.0 and later. In API version 33.0 and later, for Salesforce-managed auth providers for sandbox use cases only, leave the field blank to let Salesforce supply and manage the value.
UserInfoUrl	Type url Properties Create, Filter, Nillable, Sort, Update

Field Name	Details
	Description The OpenID Connect endpoint URL of the OpenID Connect authentication provider. Available in API version 29.0 and later. In API version 33.0 and later, for Salesforce-managed auth providers, leave the field blank to let Salesforce supply and manage the value.

AuthProvParamFwdAllowlist

Represents an allowlisted URL parameter that can be forwarded from authentication provider client configuration URLs to the authorization URL. Use this type to add custom functionality to authentication providers. For example, allowlist a `ui_locales` parameter and use it to send a user's language preference from Salesforce to the third-party provider's login page. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
AuthProviderId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the authentication provider associated with the allowlist. This field is a relationship field. Relationship Name AuthProvider Refers To AuthProvider
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A description for the allowlisted URL parameter.

Field	Details
Param	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the parameter, such as <code>ui_locales</code> or <code>login_hint</code> .

AuthSession

The AuthSession object represents an individual user session in your organization. This object is available in versions 29.0 and later.

Supported Calls

`delete()`, `describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
CreatedDate	Type dateTime Properties Defaulted on create, Filter, Sort Description The date and time this session was created. This field is a standard system field.
Id	Type id Properties Defaulted on create, Filter, Group, ID Lookup, Sort Description The current session's ID.
IsAssociatedWithJwtAccessToken	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code> , the session is associated with a JSON Web Token (JWT)-based access token. This field is available in API version 64.0 and later.

Field Name	Details
IsCurrent	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, the session is a member of the user's current session family. This field is available in API version 37.0 and later.
LastModifiedDate	Type dateTime Properties Defaulted on create, Filter, Sort Description The date and time this session was last updated. A session expires when the current date and time equals <code>LastModifiedDate + NumSecondsValid</code>. This field is a standard system field.
LoginGeoId	Type reference Properties Filter, Group, Nillable, Sort Description The 18-character ID for the record of the geographic location of the user for a login event. Due to the nature of geolocation technology, the accuracy of geolocation fields (for example, country, city, postal code) can vary. This field is available in API version 34.0 and later. This is a relationship field. Relationship Name LoginGeo Relationship Type Lookup Refers To LoginGeo
LoginHistoryId	Type reference Properties Filter, Group, Nillable, Sort Description The 18-character ID for a successful login event. When a session is reused, Salesforce updates the <code>LoginHistoryId</code> with the value from the most recent login. This field is available in API version 33.0 and later.

Field Name	Details
	This is a relationship field. Relationship Name LoginHistory Relationship Type Lookup Refers To LoginHistory
LoginType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of login used to access the session. Possible values are: • AJAX Toolkit • Apex Office Toolkit • AppExchange • Application • AppStore • Certificate-based login • Chatter Communities External User • Chatter Communities External User Third Party SSO • Community • Customer Service Portal Third-Party SSO • Customer Service Portal • DataJunction • DB Replication • Employee Login to Community • Excel Integration • Help and Training • HOTP YubiKey • Lightning Login • Networks Portal API Only • Offline Client • Order Center • Other Apex API • Outlook Integration • Partner Portal Third-Party SSO • Partner Portal

Field Name	Details
	• Partner Product • Passwordless Login • Remote Access 2.0 • Remote Access Client • Sales Anywhere • Salesforce Outlook Integration • Salesforce.com Website • SAML Chatter Communities External User SSO • SAML Customer Service Portal SSO • SAML Idp Initiated SSO • SAML Partner Portal SSO • SAML Sfdc Initiated SSO • SAML Site SSO • Self-Service • Signup • Sync • SysAdmin Switch • Third Party SSO • Unknown • Validate
LogoutUrl	Type string Properties Filter, Nillable, Sort Description The page or view to display after users log out of an Experience Cloud site, or an org if they authenticated using SAML. This field is available in API version 32.0 and later.
NumSecondsValid	Type int Properties Filter, Group, Sort Description The number of seconds before the session expires, starting from the last update time.
ParentId	Type reference

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description The 18-character ID for the parent session, if one exists (for example, if the current session is for a canvas app). If the current session doesn't have a parent, this value is the current session's own ID.
SessionSecurityLevel	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Standard or High, depending upon the authentication method used.
SessionType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of session. Common ones are UI, Content, API, and Visualforce. For more information, see User Session Types in the <i>Object Reference Guide</i>.
SourceIp	Type string Properties Filter, Group, Sort Description IP address of the end user's device from which the session started. This address can be an IPv4 or IPv6 address. The SourceIp field doesn't support the <code>LIKE</code> comparison operator.
UserType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The kind of user for this session. Types include Standard, Partner, Customer Portal Manager, High Volume Portal, and CSN Only.
UserId	Type reference

Field Name	Details
	Properties Filter, Group, Nillable, Sort
	Description The user's Salesforce user ID. This is a relationship field.
	Relationship Name Users
	Relationship Type Lookup
	Refers To User

Usage

The AuthSession object exposes session data and enables read and delete operations on that data. For example, use this object to see who is signed in to your org. Or you can use this object to create a tool to delete a session, ending that user's session. For a user, only their own sessions are available, while administrators can see all sessions.

You can't change user sessions with this object. You can only read and delete them.

AutomatedAction

Represents the configuration of an automated action, such as a workflow rule. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ApiVersion	Type int
	Properties Filter, Group, Sort
	Description Required. API version to use for executing the automated action.

Field	Details
Description	Type textarea Properties Create, Nillable, Update Description Description of the automated action.
ErrorDetail	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The source of the error encountered when executing the automated action. Possible values are: - invalidCondition - invalidConditionReference - invalidConditionValue - invalidInvocableAction - invalidInvocableActionParam - invalidReferenceEntity - unknownError
ErrorMessage	Type textarea Properties Create, Nillable, Update Description A description of the error encountered when executing the automated action.
EvalType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description When the automated action runs. Possible values are: - OnCreate - OnCreateAndUpdate

Field	Details
ExecutionType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Whether the action runs automatically or generates a reminder. Possible values are: • Automatic • Reminder
ExtraFilterExpression	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Additional condition logic for cross-object filters.
ExtraFilterType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Additional criteria for cross-object filters. Possible values are: • Advanced • And • Or
FilterExpression	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description If <code>FilterType</code> is <code>Advanced</code>, this field contains the condition logic.
FilterType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description Criteria for filters. Possible values are: - Advanced - And - Or
InvocationName	Type string Properties Create, Filter, Group, Sort, Update Description Invocable action to execute.
IsLocked	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the automated action record is locked or not. The default value is <code>false</code>.
LastEditedDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The timestamp when the automated action had a change that impacted rule evaluation.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed this record. If this value is null, this record was likely referenced (<code>LastReferencedDate</code>) and not viewed.
<code>MayEdit</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the automated action record can be edited or not. The default value is <code>false</code>.
<code>Name</code>	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the automated action.
<code>ReferenceEntity</code>	Type string Properties Create, Filter, Group, Sort, Update Description Entity on which the automated action operates.
<code>RuleType</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of workflow rule. Possible values are: • <code>ManagerAssigned</code> • <code>ManagerSubscribed</code> • <code>Personal</code>
<code>State</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description The status of the alert. Possible values are: • Active • Error • Inactive
SubscriptionState	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description For users who don't have an override, the default value of the subscription. Possible values are: • Active • Inactive
Summary	Type string Properties Filter, Nillable, Sort Description A human-readable explanation of the automated action, its conditions, and its parameters.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AutomatedActionOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[AutomatedActionShare](#) on page 67

Sharing is available for the object.

AutomatedActionCondition

Represents the logical operator details for evaluating conditions in an automated action. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
<code>AutomatedActionId</code>	Type reference Properties Create, Filter, Group, Sort Description ID of the automated action. This field is a relationship field. Relationship Name AutomatedAction Relationship Type Lookup Refers To AutomatedAction
<code>ConditionNumber</code>	Type int Properties Create, Filter, Group, Sort, Update Description Reference number of the condition containing advanced filter logic.
<code>IsLocked</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the automated action condition record is locked or not. The default value is <code>false</code>.
<code>MayEdit</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Indicates whether the automated action condition record can be edited or not. The default value is <code>false</code>.
Operator	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The logical operator for this condition. Possible values are: • Contains • EndsWith • Equal • GreaterThan • GreaterThanOrEqual • IsChanged • IsNull • LessThan • LessThanOrEqual • NotEqual • StartsWith
ReferenceField	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The field to use for this condition.
Type	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of condition. Possible values are: • ExtraFilterCondition • PrimaryFilterCondition

Field	Details
Value	Type textarea Properties Create, Nillable, Update Description The value to compare to the <code>ReferenceField</code>.

AutomatedActionOverride

Represents a modified attribute of a shared automated action. For example, the modified attribute can contain customizations for your business. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
FieldName	Type string Properties Create, Filter, Group, Sort, Update Description The name of the field to override.
IsLocked	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the automated action override record is locked or not. The default value is <code>false</code>.
IsRelatedRecordOverridable	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Indicates whether the parent automated action record can be overridden. The default value is <code>false</code>.
MayEdit	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the automated action override record can be edited or not. The default value is <code>false</code>.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the automated action.
RelatedRecordApiName	Type string Properties Filter, Group, Nillable, Sort Description The object name of the <code>RelatedRecordId</code>. This field is a calculated field.
RelatedRecordId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the automated action. This field is a polymorphic relationship field. Relationship Name RelatedRecord Relationship Type Lookup Refers To AutomatedAction, FtestUser

Field	Details
Value	Type textarea Properties Create, Update Description The overridden value used for <code>FieldName</code>.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AutomatedActionOverrideOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[AutomatedActionOverrideShare](#) on page 67

Sharing is available for the object.

AutomatedActionParameter

Represents the values or field references evaluated by the automated action. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AutomatedActionId	Type reference Properties Create, Filter, Group, Sort Description ID of the automated action. This field is a relationship field. Relationship Name AutomatedAction Relationship Type Lookup

Field	Details
	Refers To AutomatedAction
DataType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The data type of the value or field reference value. Possible values are: • Boolean • Double • Int • None • String • ValueList
IsLocked	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the automated action parameter record is locked or not. The default value is <code>false</code> .
MayEdit	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the automated action parameter record can be edited or not. The default value is <code>false</code> .
ParameterName	Type string Properties Create, Filter, Group, Sort, Update Description The name of the invocable action parameter the value maps to.

Field	Details
ReferenceField	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The reference to the field that's resolved at runtime. For example, LeadID. If <code>value</code> has a value, this field is null.
Value	Type textarea Properties Create, Nillable, Update Description The value to be passed to the invocable action parameter at runtime. If <code>ReferenceField</code> has a value, this field is null.

AutomatedActionReminder

Represents a reminder to the end user to take an action in the future. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ActionTakenDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Timestamp of when the user took the action suggested by the reminder.
AutomatedActionId	Type reference Properties Create, Filter, Group, Sort, Update

Field	Details
	Description ID of the automated action. This field is a relationship field. Relationship Name AutomatedAction Relationship Type Lookup Refers To AutomatedAction
IsLocked	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the automated action reminder record is locked or not. The default value is <code>false</code>.
IsValidForUser	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the automated action is active and accessible to the user who owns the record (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
MayEdit	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the automated action reminder record can be edited or not. The default value is <code>false</code>.
ReferenceRecordId	Type reference Properties Create, Filter, Group, Sort, Update

Field	Details
	Description The record that triggered the reminder. For example, when a rule is set to Case, the value of this field is <code>CaseId</code>. This field is a polymorphic relationship field. Relationship Name ReferenceRecord Relationship Type Lookup Refers To Account, Case, Contact, Invoice, Lead, Opportunity
StartDateTime	Type dateTime Properties Create, Filter, Sort, Update Description The date and time this reminder is scheduled to be displayed to the user.
State	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The status of the reminder. Possible values are: - Active - Completed - Disabled - Dismissed - Expired
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of automated action reminder. Possible values are: Reminder

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AutomatedActionReminderOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[AutomatedActionReminderShare](#) on page 67

Sharing is available for the object.

BackgroundOperation

Represents a background operation in an asynchronous job queue. This object is available in API version 35.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `retrieve()`

Special Access Rules

- BackgroundOperation doesn't support search.

Fields

Field Name	Details
Error	Type string Properties Filter, Group, Nillable, Sort Description The error message for the operation. Applies only if the operation has an error status.
ExecutionGroup	Type string Properties Filter, Group, Nillable, Sort Description Applies only if the operation is merged with other operations into an execution group to be processed in bulk. Identifies the execution group.
ExpiresAt	Type dateTime

Field Name	Details
	Properties Filter, Nillable, Sort Description After this time, the operation is removed from the asynchronous job queue. Applies only if the operation has a status of complete, canceled, error, or merged.
FinishedAt	Type dateTime Properties Filter, Nillable, Sort Description When the operation reached the status of completed or error.
GroupLeaderId	Type reference Properties Filter, Group, Nillable, Sort Description Applies only if the operation is merged with other operations into an execution group to be processed in bulk. Identifies the operation that's selected as the leader of the execution group. This field is a relationship field. Relationship Name GroupLeader Relationship Type Lookup Refers To BackgroundOperation
Name	Type string Properties Filter, Group, idLookup, Sort Description Identifies the background operation.
NumFollowers	Type int Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description Applies only if the operation is merged with other operations into an execution group to be processed in bulk. Number of other operations that are in the execution group.
ParentKey	Type string Properties Filter, Group, idLookup, Nillable, Sort Description Tag that identifies related sets of operations, if any.
ProcessAfter	Type dateTime Properties Filter, Nillable, Sort Description The operation is scheduled to be processed after this time.
RetryBackoff	Type int Properties Filter, Group, Nillable, Sort Description Applies only if the operation has an error status. The first retry is attempted immediately. Each subsequent retry is increasingly delayed according to an exponential expression that's multiplied by the <code>RetryBackoff</code>, in milliseconds. Specifically, the delay time is $(2^n - 1) \times R$, where n is the <code>RetryCount</code>, and R is the <code>RetryBackoff</code>. The default value for <code>RetryBackoff</code> depends on the type of operation. For example, the <code>RetryBackoff</code> default for write operations on external objects is 1,000 milliseconds. For write operations, retries are attempted immediately, after 3 seconds, after 7 seconds, after 15 seconds, and so on.
RetryCount	Type int Properties Filter, Group, Nillable, Sort Description Number of attempted retries. Applies only if the operation has an error status.

Field Name	Details
RetryLimit	Type int Properties Filter, Group, Nillable, Sort Description Maximum number of retries to attempt. Applies only if the operation has an error status.
SequenceGroup	Type string Properties Filter, Group, Nillable, Sort Description Identifies the sequence group. Applies only if the operation is merged with other operations into an execution group to be processed in bulk. Within an execution group, operations can be placed into a sequence group to be executed in a specific order.
SequenceNumber	Type int Properties Filter, Group, Nillable, Sort Description Order position within the sequence group. Applies only if the operation is merged with other operations into an execution group to be processed in bulk. Within an execution group, operations can be placed into a sequence group to be run in a specific order.
StartedAt	Type dateTime Properties Filter, Nillable, Sort Description When the operation started running.
Status	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Status of the background operation. The options are:

Field Name	Details
	• New • Scheduled • Canceled • Merged • Waiting • Running • Error • Complete
SubmittedAt	Type dateTime Properties Filter, Nillable, Sort Description When the operation was added to the job queue.
Timeout	Type int Properties Filter, Group, Nillable, Sort Description Maximum time in milliseconds to wait for results after the operation started running.
Type	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Type of the background operation. The options are: • ApiCatalogPoller • BlockchainEventPoller • CdpMetadataDeploy • ExternalChangeDataCapture • ExternalConnectivityPoller • ExternalObject • ExternalObjectSync • ExternalServiceCallback • MetadataChangesetOperation • MfgBulkUpdate

Field Name	Details
	• PrivateConnectMigration • SingularityAutoSync • SingularityMDSSync • SingularitySchemaEvolutionTrigger • SiteTaskCreate • SiteTaskPublish • Sweeper • WebCart • XClean
WorkerUri	Type string Properties Filter, Group, idLookup, Nillable, Sort Description URI of the worker that performed the operation. Example for a Salesforce Connect OData operation: <pre>services/data/v35.0/xds/upsert</pre>

Usage

Use the BackgroundOperation object to:

- Monitor the job status of asynchronous operations.
- View errors that are related to the asynchronous operations.
- Extract statistics for the asynchronous job queue.

BackgroundOperationResult

Stores error messages generated when or importing data into big objects using Bulk API. This is a big object, available in API version 37.0 and later.

Each instance of `BackgroundOperationResult` represents one error. The `Message` field stores the text of the error message. The `ParentID` field stores the:

- Batch ID for the data import, in case of Bulk API

Bulk API validates data at the time of import, and generates an error message for the first occurrence of invalid data in any row of the data file. The validation performed depends on the type of data being imported.

- **Text**—The length of the input string must be less than or equal to the length of the corresponding text field in the target object.
- **Number**—The input data must be a number, whose scale and precision are compatible with the corresponding number field in the target object.

- **ID**—The input data must be a valid 15- or 18-character ID.
- **DateTime**—The input data must be a valid dateTime value, in the approved format.
- **Lookup**—The lookup value must be a valid 15- or 18-character ID.

Supported Calls

`describeSObjects()`, `query()`

Fields

Field Name	Details
CreatedById	Type ID Properties Nillable Description The user ID of the user initiating the Bulk API request.
CreatedDate	Type dateTime Properties Defaulted on create Description The date and time at which the Bulk API request was made.
Data	Type string Properties Nillable Description The data that generated the error message. The total length is limited to 2,000 characters, and each column can occupy a maximum of 50 characters. Any data exceeding those limits is truncated.
Id	Type ID Properties Defaulted on create, idLookup Description The ID of the error message.
Message	Type string

Field Name	Details
	Properties Nillable Description The text of the error message.
MessageType	Type picklist Properties Nillable, Restricted picklist Description The type of error message. The possible values are: ERROR, WARNING, or INFO.
ParentId	Type reference Properties Filter, Sort Description The batch ID in Bulk API.

Usage

You can check for errors by querying the `BackgroundOperationResult` object. For example, this query returns details of all errors in a data file imported using Bulk API, whose batch ID is `751xx0000000060AAQ`.

```
SELECT CreatedById, CreatedDate, Id, Message, MessageType, ParentId FROM
BackgroundOperationResult WHERE ParentId = "751xx0000000060AAQ"
```



Note: You can only view errors resulting from Bulk API requests that you initiated, unless you have the global permission to view all data.

BatchApexErrorEvent

The documentation has moved to [BatchApexErrorEvent](#) in the *Platform Events Developer Guide*.

BillingBatchScheduler

Represents a scheduled processing job that triggers recurring invoice batch runs and payment batch runs in Subscription Management. This object is available in API version 55.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
BillingSchedulerName	Type string Properties Filter, Group, idLookup, Sort Description Name of the scheduler.
Comments	Type textarea Properties Filter, Nillable, Sort Description Optional field for comments about the scheduler.
CronExpression	Type string Properties Filter, Group, Sort Description Determines how often the scheduler recurs.
EndDate	Type date Properties Filter, Group, Nillable, Sort Description The date when the scheduler stops triggering batch processing jobs.
FrequencyCadence	Type picklist Properties Filter, Group, Restricted picklist, Sort

Field	Details
	Description Indicates how often the scheduler triggers the invoice batch run or the payment batch run. Possible values are: • Daily—The scheduled job recurs every day. • Monthly—The scheduled job recurs every month. • Once—The scheduled job occurs one time and doesn't recur. • Weekly—The scheduled job recurs every week.
FrequencyOptions	Type textarea Properties Nillable Description Derived field that stores the scheduler configuration.
JobType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Indicates the type of batch processing job that the scheduler triggers. Possible values are: • Invoice—The scheduler starts a batch invoice run. • Payment—The scheduler starts a batch payment run.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.

Field	Details
NextRunTime	Type dateTime Properties Filter, Nillable, Sort Description The date and timestamp of the next scheduled batch invoice run or batch payment run are shown in the user's time zone.
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the user who created the scheduler. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
RecurringSubType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Specifies the frequency at which the batch processing job recurs when the <code>FrequencyCadence</code> is set to <i>Monthly</i>. Possible values are: • <i>Every</i>—The processing job recurs at every instance of the frequency of the value. For example, if the <code>RecurringSubType</code> is <i>Every</i> and the <code>FrequencyCadence</code> is <i>Weekly</i>, then the batch processing job recurs every week. • <i>SpecificDate</i>—The scheduler triggers the batch processing job on the selected date. For example, if the selected date is <i>5</i>, and the <code>FrequencyCadence</code> is <i>Monthly</i>, then the job recurs on the fifth day of each month.
RecurringType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description Specifies the frequency at which the batch processing job is repeated when the <code>FrequencyCadence</code> is set to <i>Weekly</i>. Possible values are: • <code>Every</code>
<code>RecursOn</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Specifies the interval at which the scheduler triggers a batch processing job. If the <code>FrequencyCadence</code> is <i>Monthly</i>, you must select either the specific date or the interval when the schedule triggers the job. Possible values are: • <code>First</code> • <code>Fourth</code> • <code>Last</code> • <code>Second</code> • <code>Third</code> Example: To tell the scheduler to trigger the job on the first Monday of the month, set the following fields: • <code>FrequencyCadence=Monthly</code> • <code>RecursOn=First</code> • <code>RecursOnDay= Monday</code>
<code>RecursOnDate</code>	Type string Properties Filter, Group, Nillable, Sort Description Specifies the date on which the scheduler triggers a batch processing job. Example: To tell the scheduler to trigger the job on the fifth day of the month, set the following fields: • <code>FrequencyCadence=Monthly</code> • <code>RecursOnDate=5</code> Example: To tell the scheduler to trigger the job on the second to last day of the month, set the following fields: • <code>FrequencyCadence=Monthly</code>

Field	Details
	• <code>RecursonDate=SecondToLast</code> If you select <i>Last</i>, <i>SecondToLast</i>, or <i>ThirdToLast</i>, the date of the batch processing job varies depending on the number of days in the month. For example, suppose <i>SecondToLast</i> is selected. If the month has 30 days, such as June, then the batch processing job occurs on the 28th day. If the month has 31 days, such as July, then the batch processing job occurs on the 29th day.
RecursonDay	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Specifies the day on which the scheduler triggers a batch processing job. If the <code>FrequencyCadence</code> field is set to <i>Weekly</i>, then you must select the day when the scheduler runs. The scheduler recurs every week on the selected day; for example, weekly on Monday. Possible values are: • Sunday • Monday • Tuesday • Wednesday • Thursday • Friday • Saturday
RunCriteriaId	Type reference Properties Filter, Group, Sort Description The ID of the filter criteria that's defined for the invoice batch run or the payment batch run. This field is a polymorphic relationship field. Relationship Name RunCriteria Relationship Type Lookup Refers To InvoiceBatchRunCriteria, PaymentBatchRunCriteria

Field	Details
StartDate	Type date Properties Filter, Group, Sort Description The date when the scheduler triggers its first batch processing job.
StartTime	Type time Properties Filter, Sort Description The time when the scheduler triggers the batch processing job.
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The status of the scheduler. Only Active schedulers can trigger batch processing jobs. Possible values are: • Active • Canceled • Draft • Inactive
TimeZone	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The time zone is either the value selected when the run was configured, or it's the user's time zone. The time zone is shown in Greenwich Mean Time (GMT).

BillingPeriodItem

Represents one payment period for a subscription. The billing period item is used to pass billing information to an invoice line item in Subscription Management. This object is available in API version 55.0 and later.

When a billing schedule is invoiced, Subscription Management creates a billing period item to store the billing and payment information that's passed to an invoice line. Subscription Management next creates an invoice line for billing period items that match the invoice's

target date. One billing period item is created for each billing period in the billing schedule. For example, a one-year subscription that's billed quarterly creates a billing schedule with four billing period items.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
Amount	Type currency Properties Filter, Sort Description Price for the billing period item. Used to calculate the invoice line's Amount field.
BillingPeriodEndDate	Type date Properties Filter, Group, Nillable, Sort Description Used to calculate the invoice line's end date.
BillingPeriodItemNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description System-defined number that refers to the billing period item.
BillingPeriodStartDate	Type date Properties Filter, Group, Nillable, Sort Description Used to calculate the invoice line's start date.

Field	Details
BillingScheduleId	Type reference Properties Filter, Group, Sort Description Parent billing schedule of the billing period item. This field is a relationship field. Relationship Name BillingSchedule Relationship Type Lookup Refers To BillingSchedule
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Contains the ISO code for any currency allowed by the org. Available only for orgs with the multicurrency feature enabled.
InvoiceBatchRunId	Type reference Properties Filter, Group, Nillable, Sort Description Parent invoice batch run of the billing period item. This field is a relationship field. Relationship Name InvoiceBatchRun Relationship Type Lookup Refers To InvoiceBatchRun
InvoiceLineId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description This field looks up to the invoice line that's generated from the billing period item. This field is populated only when a billing period item is generated via an invoice batch run. Otherwise, this field is empty. This field is a relationship field. Relationship Name InvoiceLine Relationship Type Lookup Refers To InvoiceLine
InvoiceStatus	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Status of the invoice that contains the invoice line created from the billing period item. Valid values are: • Canceled—The invoice for this billing period item was canceled. • Draft—The invoice has been created but hasn't been posted. Available in API version 60.0 and later. • DraftInProgress—The invoice hasn't been created yet. When the invoice is created, the <code>InvoiceStatus</code> field value is changed to <code>Draft</code>. If the invoice generation process fails, the <code>InvoiceStatus</code> field value shows <code>DraftInProgress</code>. Available in API version 60.0 and later. • Error—The invoice for this billing period item was generated in error. • Pending—The invoice for this billing period item is being generated. • Posted—An invoice line based on this billing period has been created and added successfully to the invoice. • PostingInProgress—An invoice line based on this billing period has been created and is in the process of being added to the invoice. Available in API version 60.0 and later. • Voided—An invoice line based on this billing period was voided. • VoidInProgress—An invoice line based on this billing period is in the process of being voided.
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort

Field	Details
	Description Status of the billing period item. Draft billing period items aren't evaluated for invoice line creation. Valid values are: • Canceled • Draft • Reviewed

BillingPolicy

Represents a group of billing treatments, which define the rules for how to invoice a customer for an order item. This object is available in API version 55.0 and later.

Billing policies are related to products, which pass the policy on to the resulting order items. When an order is activated, Subscription Management assigns a billing treatment to each order item based on the values in the `BillingTreatmentSelection` field. Then Subscription Management uses the billing treatment to create billing schedules.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
<code>BillingTreatmentSelection</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Defines how Subscription Management assigns billing treatments to order items and to assets related to the billing policy. Possible values are:

Field	Details
	Default—The value specified in the DefaultBillingTreatmentId field is automatically applied to order items and assets. Manual—Users must specify the billing treatment that's applied to the order items and assets.
DefaultBillingTreatmentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description When BillingTreatmentSelection has a value of Default, Subscription Management uses the selected billing treatment for all order items and assets related to the billing policy. This field is a relationship field. Relationship Name DefaultBillingTreatment Relationship Type Lookup Refers To BillingTreatment
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Optional user-defined description that describes the billing policy.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Optional user-defined name for the billing policy.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The billing policy's status. Possible values are: • Active—Indicates that the billing policy is available for use on products. • Draft—Indicates that the billing policy isn't available for use on products. Use this status when creating billing policies that aren't ready to be activated. • Inactive—Indicates that the billing policy isn't available for use on products.

BillingSchedule

Stores the order item information used in the invoicing process. This object is available in API version 55.0 and later.

When you activate an order, Subscription Management creates one billing schedule for each order item in an order. For example, if an order contains 15 order items, Subscription Management creates 15 billing schedules, one billing schedule for each item. The invoice scheduler uses the information in the billing schedule to determine when it's time to invoice an order item.

Billing schedules for all order items that are generated from one asset are summarized in a billing schedule group.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
BillDayOfMonth	Type int Properties Filter, Group, Nillable, Sort Description An integer from 1 to 31 that indicates the day of the month.
BilledAmount	Type currency Properties Filter, Nillable, Sort Description The total amount (excluding tax) that has been invoiced from the billing schedule. This field is a calculated field.
BillingAccountId	Type reference Properties Filter, Group, Sort Description This field is a relationship field. Relationship Name BillingAccount Refers To Account
BillingPeriodAmount	Type currency Properties Filter, Nillable, Sort Description The amount to be invoiced each billing period. For example, if the billing period is monthly, this field shows the monthly amount that appears on the invoice line.

Field	Details
BillingScheduleEndDate	Type date Properties Filter, Group, Nillable, Sort Description The last date that the billing schedule is available for invoicing. Inherited from the EndDate field on the order item.
BillingScheduleGroupId	Type reference Properties Filter, Group, Sort Description ID of the billing schedule group that contains the billing schedule. Billing schedules are grouped when they have the same source order item. The source order item is the original order item that a customer bought. Afterwards, if the customer amends, cancels, or renews the order item, a new billing schedule is created with the BillingScheduleGroupId for the original order item. This field is a relationship field. Relationship Name BillingScheduleGroup Relationship Type Lookup Refers To BillingScheduleGroup
BillingScheduleNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Autogenerated reference number for the billing schedule.
BillingScheduleStartDate	Type date Properties Filter, Group, Nillable, Sort Description The date that the billing schedule is available for invoicing. Inherited from the ServiceDate on the order item.

Field	Details
BilledThroughPeriod	Type date Properties Filter, Group, Nillable, Sort Description The last billing period that includes this date.
BillingTreatmentItemId	Type reference Properties Filter, Group, Sort Description The billing treatment item used to configure invoiceable amounts on the billing schedule. This field is a relationship field. Relationship Name BillingTreatmentItem Relationship Type Lookup Refers To BillingTreatmentItem
CancellationDate	Type date Properties Filter, Group, Nillable, Sort Description The date on which the subscriber can no longer access the service. For example, if a service ends on August 31, then the cancellation date is September 1, because that's the date when the subscriber can no longer use the service. Subscription Management doesn't invoice billing schedules past their cancellation date.
Category	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The business action represented by the billing schedule. Possible values are: - AmendQuantity—A billing schedule for an order that changes the quantity. This object is available in API version 56.0 and later. - Cancellation—A billing schedule for an order that was canceled

Field	Details
	• Original—A billing schedule for the initial order • Renewal—A billing schedule for an order that was renewed
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Three-letter ISO 4217 currency code associated with the invoice. The default value is USD.
InvoiceBatchRunId	Type reference Properties Filter, Group, Nillable, Sort Description The invoice batch run that evaluated this billing schedule and its billing period items to produce an invoice. This field is a relationship field. Relationship Name InvoiceBatchRun Relationship Type Lookup Refers To InvoiceBatchRun
InvoiceRunBatch	Type picklist Properties Filter, Group, Nillable, Sort Description The batch value used by the invoice run that evaluated this billing schedule. During an invoice run, billing schedules with the same batch value (including null) are grouped to the same invoice run. For example, create one batch of invoices for Premium Customers and another batch for Regular Customers. Possible values are: • Premium Customers • Regular Customers

Field	Details
NextBillingDate	Type date Properties Filter, Group, Nillable, Sort Description The date that the next billing period starts for the invoice. Used to calculate which invoice lines are included on an invoice. When an invoice scheduler or API evaluates an order for invoicing, billing schedules with a next billing date on or before the invoice's target date are included on the invoice.
NextChargeFromDate	Type date Properties Filter, Group, Nillable, Sort Description The date that the billing schedule is invoiced in the upcoming billing period. For example, if you invoiced a customer for a billing period of 01/01/22 through 01/31/22, the billing schedule's <code>NextChargeFromDate</code> is 02/01/22.
OriginalBillingScheduleId	Type reference Properties Filter, Group, Nillable, Sort Description If this billing schedule is an amended or canceled billing schedule, then this field shows the original billing schedule. Otherwise, this field is null. This field is a relationship field. Relationship Name OriginalBillingSchedule Relationship Type Lookup Refers To BillingSchedule
PendingAmount	Type currency Properties Filter, Nillable, Sort Description The amount from the current billing term that hasn't been billed yet. For example, the unbilled amount for a month, quarter, or year, depending on this billing schedule's billing term.

Field	Details
Quantity	Type double Properties Filter, Nillable, Sort Description The quantity of the order item that created the billing schedule.
ReferenceEntityId	Type reference Properties Filter, Group, Nillable, Sort Description The parent order of the order item that created the billing schedule. This field is a polymorphic relationship field. Relationship Name ReferenceEntity Relationship Type Lookup Refers To Order
ReferenceEntityItemId	Type reference Properties Filter, Group, Nillable, Sort Description The order item or asset that created the billing schedule. This field is a polymorphic relationship field. Relationship Name ReferenceEntityItem Relationship Type Lookup Refers To OrderItem, OrderItemAdjustmentLineTime, or OrderItemSummary
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The state of the order item that the billing schedule represents.

Field	Details
	Possible values are: • <code>CompletelyBilled</code> • <code>Error</code> • <code>Processing</code> • <code>ReadyForInvoicing</code>
<code>TaxTreatmentId</code>	Type reference Properties Filter, Group, Sort Description Shows the treatment used to calculate tax for the billing schedule. Defined based on the order item's tax policy. This field is a relationship field. Relationship Name TaxTreatment Relationship Type Lookup Refers To TaxTreatment
<code>TotalAmount</code>	Type currency Properties Filter, Nillable, Sort Description The total amount of the order item represented by the billing schedule.
<code>UnitPrice</code>	Type currency Properties Filter, Nillable, Sort Description The price for an individual unit of the billing schedule's parent order item, including charges, adjustments, and discounts. Inherited from the order item's <code>UnitPrice</code> field.

BillingScheduleGroup

Represents a consolidated view of all billing schedules related to the order items generated from one asset, including new orders and amendment orders. This object is available in API version 55.0 and later.

When an order is created, a billing schedule is generated for each order item. The billing schedule group summarizes fields from each billing schedule. For example, it summarizes financial fields such as Total Billed Amount and Total Pending Amount and billing fields such as Billing Day of Month and Billing Term.

The billing schedule group includes schedules generated from a new order item and schedules generated from amendment order items. The billing schedule group shows users the summarized financial data that includes any changes, such as new orders or amendments, made to the asset.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`

Special Access Rules

This object is available with Subscription Management, Commerce Subscriptions, and Billing (Revenue Cloud). If your org has both Subscription Management and Commerce Subscriptions, then Subscription Management takes precedence.

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
<code>BillDayOfMonth</code>	Type int Properties Filter, Group, Nillable, Sort Description The Billing Day of Month for the billing schedules that comprise the billing schedule group. Subscription Management uses the order item's billing day of month to calculate the order item's next billing date, which the billing schedule then inherits. For example, an order item can be billed on the first day of the month.
<code>BillToContactId</code>	Type reference Properties Filter, Group, Nillable, Sort, Update Description The contact related to the billing schedule group. This field can't be modified when related billing schedules are in processing. This field is a relationship field. Relationship Name BillToContact

Field	Details
	Relationship Type Lookup Refers To Contact
BillingAccountId	Type reference Properties Filter, Group, Sort Description The Salesforce account for the billing schedule group. This field is a relationship field. Relationship Name BillingAccount Relationship Type Lookup Refers To Account
BillingAddress	Type address Properties Filter, Nillable Description The compound form of the billing address. Read-only. See Address Compound Fields for details on compound address fields.
BillingCity	Type string Properties Filter, Group, Nillable, Sort Description Details for the billing address of this billing schedule group. Maximum size is 40 characters.
BillingCountry	Type string Properties Filter, Group, Nillable, Sort Description Details for the billing address of this billing schedule group. Maximum size is 80 characters.

Field	Details
BillingGeocodeAccuracy	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Accuracy level of the geocode for the billing address. See Compound Field Considerations and Limitations for details on geolocation compound fields.
BillingLatitude	Type double Properties Filter, Nillable, Sort Description Used with BillingLongitude to specify the precise geolocation of a billing address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places. See Compound Field Considerations and Limitations for details on geolocation compound fields.
BillingLongitude	Type double Properties Filter, Nillable, Sort Description Used with BillingLatitude to specify the precise geolocation of a billing address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places. See Compound Field Considerations and Limitations for details on geolocation compound fields.
BillingMethod	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Shows the type of billing used for the source item. Possible values are: • Evergreen • OrderAmount
BillingPostalCode	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description Details for the billing address of this billing schedule group. Maximum size is 20 characters.
BillingScheduleGroupNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description System-generated reference number for the billing schedule group.
BillingStartMonth	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Read-only field used with annual billing. The field shows the numbers from 1 to 12, which indicate the month when billing begins for an annual subscription. For example, if billing starts in January, the value is 1; if billing starts in June, the value is 6. This field is available in API version 58.0 and later.
BillingState	Type string Properties Filter, Group, Nillable, Sort Description Details for the billing address of this billing schedule group. Maximum size is 80 characters.
BillingStreet	Type textarea Properties Filter, Group, Nillable, Sort Description Street address for the billing address of this billing schedule group.
BillingTerm	Type int Properties Filter, Group, Nillable, Sort Description Used with <code>BillingTermUnit</code> to define a billing cycle. For example, bill every 20 days or every two months. In this example, the <code>BillingTerm</code> is <code>20</code> and the <code>BillingTermUnit</code> is <code>days</code>

Field	Details
BillingTermUnit	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The frequency with which the billing schedule is invoiced. Possible values are: • Day • Month • OneTime • Quarter • Semi-Annual • Year Used with <code>BillingTermUnit</code> to define a billing cycle.
BillingType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Inherited from the shared value of each billing schedule in the billing schedule group. Defines when Subscription Management bills a product or service relative to when it's provided to the customer. Advance billing invoices a product or service before you provide it, while arrears billing invoices a product or service after you provide it. Subscription Management evaluates the billing type when it calculates an order's next billing date. Possible values are: • Advance – If the billing schedule is billed in advance, Subscription Management evaluates the order's billing day of month to choose the nearest date on or before the order product's start date. For example, if a monthly order product's start date is January 1, and the order's billing day of month is 15, the next billing date is December 15. • Arrears – If the billing schedule is billed in arrears, Subscription Management evaluates the order's billing day of month to choose the nearest date after the order product's start date. For example, if a monthly order product's start date is January 1 and the order's billing day of month is 15, the order product's next billing date is January 15.
CancellationDate	Type date Properties Filter, Group, Nillable, Sort

Field	Details
	Description The date that a cancellation was made against the billing schedule. Subscription Management doesn't invoice billing schedules past their cancellation date.
Controller	Type picklist Properties Filter, Group, Restricted picklist, Sort Description During the invoicing process, this field determines which date is used when the billing schedule group and billing schedule have a related field with conflicting values. For example, when <code>Controller</code> has a value of <code>BillingScheduleGroup</code>, if the billing schedule's billing day of month is 5 while the billing schedule group's billing day of month is 10, the invoice is sent on the 10th day of the month. Possible values are: • <code>BillingScheduleGroup</code>—The date on the billing schedule group controls.
CurrentBillingPeriodAmount	Type currency Properties Filter, Nillable, Sort Description This field was removed in Subscription Management API version 55.0.
CurrentQuantity	Type double Properties Filter, Nillable, Sort Description This field was removed in Subscription Management API version 55.0.
EffectiveNextBillingDate	Type date Properties Filter, Group, Nillable, Sort Description The earliest <code>NextBillingDate</code> from all billing schedules in the billing schedule group. This field is a reference field that isn't used for any features or calculations. This field is a calculated field.

Field	Details
EndDate	Type date Properties Filter, Group, Nillable, Sort Description The latest end date from all billing schedules in the billing schedule group.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
OwnerId	Type reference Properties Filter, Group, Sort, Update Description The Salesforce user who owns the billing schedule group. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PaymentTermId	Type reference

Field	Details
	Properties Filter, Group, Nillable, Sort, Update Description The ID of the payment term used in this billing schedule group. This field can't be modified when related billing schedules are in processing. This field is a relationship field. Relationship Name PaymentTerm Relationship Type Lookup Refers To PaymentTerm
PeriodBoundary	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Inherited from the order item's parent quote line item or sales transaction item. The period boundary helps determine the start and end date of the billing periods. Possible values are: • AlignToCalendar—the period starts on the first day of the term unit; for example, the first day of the month. • Anniversary—The start date determines the boundary. For example, if a monthly subscription starts on September 13, the subscription starts on the 13th day of each month. • DayOfPeriod—the period starts on the day indicated by <code>PeriodBoundaryDay</code>. • EndOfPeriod—the period starts on the last day of the pricing term unit.
Product2Id	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the product for the order item represented by each billing schedule in the billing schedule group. This field is a relationship field. Relationship Name Product2

Field	Details
	Relationship Type Lookup Refers To Product2
ProductName	Type string Properties Filter, Group, Nillable, Sort Description The name of the product for the order item represented by each billing schedule in the billing schedule group.
ProrationPolicyId	Type reference Properties Filter, Group, Nillable, Sort Description Refers to the proration policy that applies to this billing schedule group. The proration policy defines how time periods are calculated for subscription orders. For example, whether partial periods are allowed. Inherited from the shared proration policy for each billing schedule in the billing schedule group. This field is a relationship field. Relationship Name ProrationPolicy Relationship Type Lookup Refers To ProrationPolicy
ReferenceEntityId	Type reference Properties Filter, Group, Nillable, Sort Description The asset used to create the billing schedules in the billing schedule group. This field is a relationship field. Relationship Name ReferenceEntity

Field	Details
	Relationship Type Lookup Refers To Asset
ShippingAddress	Type address Properties Filter, Nillable Description The compound form of the shipping address. Read-only. See Address Compound Fields for details on compound address fields.
ShippingCity	Type string Properties Filter, Group, Nillable, Sort Description Details for the shipping address for this billing schedule group. City maximum size is 40 characters
ShippingCountry	Type string Properties Filter, Group, Nillable, Sort Description Details for the shipping address for this billing schedule group. Country maximum size is 80 characters.
ShippingGeocodeAccuracy	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Accuracy level of the geocode for the shipping address. See Compound Field Considerations and Limitations for details on geolocation compound fields.
ShippingLatitude	Type double Properties Filter, Nillable, Sort

Field	Details
	Description Used with ShippingLongitude to specify the precise geolocation of a shipping address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places. See Compound Field Considerations and Limitations for details on geolocation compound fields.
ShippingLongitude	Type double Properties Filter, Nillable, Sort Description Used with ShippingLatitude to specify the precise geolocation of an address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places. See Compound Field Considerations and Limitations for details on geolocation compound fields.
ShippingPostalCode	Type string Properties Filter, Group, Nillable, Sort Description Details for the shipping address for this billing schedule group. Postal code maximum size is 20 characters.
ShippingState	Type string Properties Filter, Group, Nillable, Sort Description Details for the shipping address for this billing schedule group. State maximum size is 80 characters.
ShippingStreet	Type textarea Properties Filter, Group, Nillable, Sort Description The street address of the shipping address for this billing schedule group. Maximum of 255 characters.
StartDate	Type date Properties Filter, Group, Nillable, Sort

Field	Details
	Description The earliest start date from all billing schedules in the billing schedule group.
TotalBilledAmount	Type currency Properties Filter, Nillable, Sort Description The amount that has been invoiced for all billing schedules within the billing schedule group. This field is a calculated field.
TotalPendingAmount	Type currency Properties Filter, Nillable, Sort Description The amount that hasn't yet been invoiced for all billing schedules within the billing schedule group. This field is a calculated field.

BillingTreatment

Defines how Subscription Management bills an order item. The Exclude From Billing field controls whether the order item is invoiced. Child billing treatment items control how much of the order item's balance is invoiced for each invoice across the subscription's lifecycle. Billing treatments are assigned to order items based on the parent billing policy's Billing Treatment Selection field. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
BillingPolicyId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the billing policy for the billing treatment. This field is a relationship field. Relationship Name BillingPolicy Relationship Type Lookup Refers To BillingPolicy
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Optional user-defined description of the billing treatment.
ExcludeFromBilling	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Excludes any order items assigned to the treatment from creating billing schedules. Possible values are: • No • Yes
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
LegalEntityId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the legal entity used to assign the treatment to order items when the parent billing policy's <code>BillingTreatmentSelection</code> is <code>LegalEntity</code>. This field is a relationship field. Relationship Name LegalEntity Relationship Type Lookup Refers To LegalEntity
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Optional user-defined name for the billing treatment.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Draft or inactive billing treatments can't be assigned to order items. Possible values are: • Active • Draft • Inactive

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

BillingTreatmentHistory (API version 55.0)

History is available for tracked fields of the object.

BillingTreatmentItem

A billing treatment item defines how the order item's total amount is distributed into billing schedules over the course of the order item's lifecycle. In the Subscription Management pilot, billing treatments must have only one billing treatment item, so that the billing treatment item covers 100% of the order item's total value. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
BillingTreatmentId	Type reference Properties Create, Filter, Group, Sort Description The parent billing treatment for the billing treatment item. This field is a relationship field. Relationship Name BillingTreatment Relationship Type Lookup Refers To BillingTreatment
BillingType	Type picklist

Field	Details
	Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Defines when Subscription Management invoices a product or service relative to when it's provided to the customer. Advance billing invoices a product or service before it's provided, while arrears billing invoices a product or service after it has provided Subscription Management evaluates billing type when calculating an order product's next billing date. Possible values are: • Advance – If the order item is billed in advance, Subscription Management evaluates the order's billing day of month to choose the nearest date on or before the order product's start date. For example, if a monthly order product's start date is January 1, and the order's billing day of month is 15, the next billing date is December 15. • Arrears – If the order item is billed in arrears, Subscription Management evaluates the order's billing day of month to choose the nearest date after the order product's start date. For example, if a monthly order product's start date is January 1 and the order's billing day of month is 15, the order product's next billing date is January 15.  Important: Arrears billing isn't available in Subscription Management API Version 54.0.
Controller	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description During the invoicing process, this field determines which value Subscription Management uses when the billing schedule group and billing schedule have a shared field with different values. For example, when <code>Controller</code> has a value of <code>BillingScheduleGroup</code>, if the billing schedule's billing day of month is 5 while the billing schedule group's billing day of month is 10, Subscription Management uses the value of 10. In the Subscription Management API version 54.0, only <code>BillingScheduleGroup</code> is supported. Possible values are: • <code>BillingScheduleGroup</code>—
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Three-letter ISO 4217 currency code associated with the billing treatment item.

Field	Details
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Optional user-defined description for the billing treatment item.
FlatAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description The amount in terms of units of currency (such as \$10 or \$21.52) to invoice from the order item. Used only when Type has a value of FlatAmount.
Handling0Amount	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Shows how Subscription Management invoices billing period items that have an amount of \$0. Possible values are: • CreateInvoice—Create a \$0 invoice line. • Null—No invoice line is created.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Default name of this record.
Percentage	Type percent Properties Create, Filter, Nillable, Sort, Update Description The percentage (such as 10% or 12.5%) to invoice from the order item. Used only when <code>Type</code> has a value of <code>Percentage</code>.
ProcessingOrder	Type int Properties Create, Filter, Group, Sort, Update Description Defines the order in which Subscription Management creates billing schedules based on each billing treatment item. Lower numbers are evaluated first. For example, if your billing treatment has a billing treatment item that invoices at 25 <code>Percentage</code> and a <code>ProcessingOrder</code> of 1, and another item that invoices at 75 <code>Percentage</code> and a <code>ProcessingOrder</code> of 2, your first billing schedule will be for 25 percent of the order item's total amount, and your second billing schedule will be for 75% of the order item's total amount.
Sequencing	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Allows users to define the number used to start invoice numbers on invoices generated from this billing treatment item. Subscription Management API Version 54.0 supports only manual sequencing. Possible values are:

Field	Details
	Manual—Invoices created from this billing treatment item begin with an invoice number of 1.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Draft billing treatment items aren't evaluated for creating billing schedules. Possible values are: - Active - Draft
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Defines whether billing schedules created from this billing treatment item are based on a flat amount or a percentage of the order item's total amount. Possible values are: - FlatAmount—The billing schedule is for a flat currency amount of the order item's total amount (for example, \$50 or \$200.50.) - Percentage—The billing schedule is for a percentage of the order item's total amount (for example, 12.5% or 54%).

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

BillingTreatmentItemHistory (API version 55.0)

History is available for tracked fields of the object.

BlockedRedirectEventLog

Blocked Redirect events capture information about blocked redirections from Salesforce to untrusted and malformed URLs. This object is available in API version 65.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
BlockedUri	Type string Properties Filter, Group, Nillable, Sort Description The full string of the target for the redirection.
BlockedUriDomain	Type string Properties Filter, Group, Nillable, Sort Description If BLOCKED_URI is a URL, the domain for that URL. To allow future redirections to the BLOCKED_URI, BLOCKED_URI_DOMAIN is the value to add to RedirectWhitelistUrl.
IsMalformedUrl	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this redirection was blocked because the target URL failed a syntax check or not. The default value is <code>false</code>.
Origin	Type string Properties Filter, Group, Nillable, Sort Description The origin that caused the request to the BLOCKED_URI. For example, if a form on an Experience Cloud Visualforce site page redirects a user to an untrusted URL via the saveURL parameter, ORIGIN contains the base URL of that site.
Referrer	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The absolute or partial address from which the request to the BLOCKED_URI came. The <code>Referrer-Policy</code> HTTP Header of the request determines how much of the URL is shared.
RemoteAddress	Type string Properties Filter, Group, Nillable, Sort Description Remote IP address of the client making the request.
RequestIdIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, <code>2020-01-20T19:12:26.965Z</code> . Milliseconds are the most granular setting.

Bookmark

Represents a link between opportunities that share common information.

This object is available to organizations with the Similar Opportunities feature enabled.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
ID	Type ID Properties Defaulted on create, Filter Description ID of the bookmark. Label is Bookmark ID.
FromId	Type ID Properties Filter Description The originating opportunity. Label is Bookmarked From ID
ToId	Type ID Properties Filter Description The opportunity to which the originating opportunity is linked. Label is Bookmarked To ID.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.

Usage

The Bookmark object works with the Opportunity object only.

Use this read-only object to query the bookmarks between opportunities in your organization. In the online application, users can search for opportunities that share attributes with their opportunity. The user can then bookmark the appropriate opportunities for future reference.

BotDefinition

Represents a top level object for Einstein Bots or Agentforce Agents. This object is available in API version 60.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

To access this object, Agents must be enabled in your org.

Fields

Field	Details
AgentTemplate	Type string Properties Filter, Group, Nillable, Sort Description If this BotDefinition represents an agent, this field represents the name of the agent template or legacy agent template used to create it.
AgentType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The agent type. For example, Agentforce Service Agent (ASA) or Agentforce Employee Agent (AEA).
BotUserId	Type reference Properties Filter, Group, Nillable, Sort Description The user ID associated with the bot definition. Relationship Name BotUser Refers To User

Field	Details
Description	Type textarea Properties Filter, Nillable, Sort Description A description for the bot or agent.
DeveloperName	Type string Properties Filter, Group, Sort Description The unique name for this object.
MasterLabel	Type string Properties Filter, Group, Sort Description The master label of the bot.
Type	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description This field represents the configuration type of the bot. The default value is <code>Bot</code>. Possible values are: • <code>Bot</code>—Default Einstein Bot configuration. • <code>ExternalCopilot</code>— An external-facing agent. For example, Agentforce Service Agent. • <code>InternalCopilot</code>— An internal-facing agent. For example, Agentforce (Default).

BotVersion

Represents a version of a bot or agent defined by a BotDefinition record. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
BotDefinitionId	Type reference Properties Create, Filter, Group, Sort Description Required. This field relates a bot version to its parent BotDefinition record. This field is a relationship field. Relationship Name BotDefinition Refers To BotDefinition
CopilotPrimaryLanguage	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The primary language that the bot or agent communicates in.
CopilotSecondaryLanguages	Type string Properties Create, Filter, Nillable, Sort, Update Description A comma-separated list of additional languages that the bot or agent supports.
DeveloperName	Type string Properties Filter, Group, Sort Description The unique name for this object.
Status	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort

Field	Details
	Description Required. Indicates whether the bot version is active or inactive. Only one version for a related BotDefinition can be active at once. Possible values are: • Active • Inactive The default value is Inactive.
ToneType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Defines the tone of the bot. Possible values are: • Casual— • Formal— • Neutral— The default value is Casual.
VersionNumber	Type int Properties Create, Filter, Group, Sort, Update Description The number for this version of the bot or agent.

BrandingSet

Represents the definition of a set of branding properties for an Experience Builder site, as defined in the Theme panel in Experience Builder. This object is available in API version 40.0 and later.

Supported Calls

create(), delete(), describeSObjects(), query(), retrieve(), update(), upsert()

Special Access Rules

The BrandingSet type is available when at least one of the following is enabled in your org: Digital Experiences, Surveys, or Lightning Experience. All users, including unauthenticated guest users, can access this type.

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description A description of the set of branding properties.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description Required. API name of the BrandingSet object.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language used in the branding set.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Required. The user-facing label of the set of branding properties.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix with a 15 character limit. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package.

Field	Details
	In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. In orgs that aren't Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix. <code>NamespacePrefix</code> is null if the publisher is Salesforce.

BrandTemplate

Letterhead for HTML EmailTemplate.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
Description	Type string Properties Create, Filter, Nillable, Sort, Update Description Description of the letterhead. Limited to 1000 characters.
DeveloperName	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Label is Letterhead Unique Name.

Field	Details
	 Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance may slow while Salesforce generates one for each record.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the letterhead is available for use (<code>true</code>) or not (<code>false</code>). Label is Active.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Label of the template as it appears in the user interface. Limited to 255 characters. Label is Brand Template Name.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
Value	Type textarea Properties Create, Update

Field	Details
	Description The contents of the letterhead, in HTML, including any logos.

Usage

Use this object to brand EmailTemplate records with your letterhead. You can also set a brand template to active or inactive. For example, if you have five different marketing brands, you can maintain each different brand in one template, and assign to the appropriate EmailTemplate.

SEE ALSO:

[EmailTemplate](#)

Brief

Represents a marketing brief. A brief contains information that's used for positioning and grounding a marketing campaign. Agentforce can help you create a campaign that best fits the goals and requirements in your brief. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AdditionalNotes	Type textarea Properties Create, Nillable, Update Description Context related to the campaign that isn't represented in the other fields.
AgentGuardrails	Type textarea Properties Create, Nillable, Update Description Guardrails that the agent must follow when creating a campaign. Use these guardrails to prevent damage to your brand and to ensure safety and compliance.

Field	Details
BrandId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The unique ID of your brand. This field is a relationship field. Relationship Name Brand Refers To ManagedContent
Description	Type textarea Properties Create, Nillable, Update Description A description of the brief.
IsConversational	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the campaign contains conversational elements. The default value is <code>false</code>.
KeyMessage	Type textarea Properties Create, Nillable, Update Description The main theme or message that you want to deliver to your customers through the campaign that's associated with the brief.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the brief was last referenced by a campaign.

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the brief was last viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the brief.
PlanName	Type textarea Properties Create, Nillable, Update Description An agent-generated name for the campaign. When you save a campaign preview, the resulting campaign has this name.
PrimaryCtas	Type textarea Properties Create, Nillable, Update Description The main calls-to-action (CTAs) for the brief. The agent uses this information to understand the actions that it can use to meet the goals of the campaign.
PrimaryGoal	Type textarea Properties Create, Nillable, Update Description The goal of the campaign that's associated with the brief. The agent uses this field to understand the main objective of the campaign.
PrimaryKpi	Type textarea Properties Create, Nillable, Update

Field	Details
	Description The main key performance indicator (KPI) for measuring progress toward the goal. The agent uses this field to prioritize actions that contribute to the goal of the campaign.
Priority	Type textarea Properties Create, Nillable, Update Description The priority of the brief. The agent uses this field to prioritize actions that contribute to the goal of the campaign.
TargetAudience	Type textarea Properties Create, Nillable, Update Description A description of the characteristics of the audience that you want to reach through the campaign that's associated with this brief.

BriefcaseAssignment

Represents the assignment of a briefcase definition to selected users and user groups. This object is available in API version 50.0 and later.

Use this object to assign selected records for users and groups to view offline. Briefcase objects are available in orgs that have Briefcase Builder and Field Service enabled.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
BriefcaseId	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the briefcase definition. Label is Briefcase Definition ID .

Field	Details
UserOrGroupId	Type reference
	Properties Create, Filter, Group, Sort
	Description Required. ID of the user or group requiring access to the briefcase. Label is User or Group ID .

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[BriefcaseAssignmentChangeEvent](#) (API version 55.0)

Change events are available for the object.

BriefcaseDefinition

Represents a briefcase definition. A briefcase makes selected records available for users to view when they're offline in the Salesforce Field Service mobile app for iOS and Android. This object is available in API version 50.0 and later.

Special Access Rules

This object is read-only.

Briefcase objects are available in orgs that have Briefcase Builder and Field Service enabled.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Packaging Considerations

An org can have up to 5 briefcases. Installed briefcases are counted against this limit. You can't install a package that includes a briefcase if your org already has 5 briefcases. When a managed package includes a briefcase, the only changes allowed for the briefcase are activating or deactivating and assigning users or groups to the briefcase.

Fields

Field	Details
Description	Type textarea

Field	Details
	Properties Filter, Nillable, Sort Description Description of the briefcase definition. Limited to 1024 characters.
DeveloperName	Type string Properties Filter, Group, Sort Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Limited to 80 characters. Label is Name.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the briefcase is available for use (<code>true</code>) or not (<code>false</code>). Label is Active.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language for the briefcase. This field defaults to the user's language unless the org is multi-language enabled. Specifies the language of the labels returned. Possible values are: - Chinese (Simplified): <code>zh_CN</code> - Chinese (Traditional): <code>zh_TW</code> - Danish: <code>da</code> - Dutch: <code>n1_NL</code> - English: <code>en_US</code> - Finnish: <code>fi</code> - French: <code>fr</code>

Field	Details
	• German: <code>de</code> • Italian: <code>it</code> • Japanese: <code>ja</code> • Korean: <code>ko</code> • Norwegian: <code>no</code> • Portuguese (Brazil): <code>pt_BR</code> • Russian: <code>ru</code> • Spanish: <code>es</code> • Spanish (Mexico): <code>es_MX</code> Spanish (Mexico) defaults to Spanish for customer-defined translations. • Swedish: <code>sv</code> • Thai: <code>th</code> The Salesforce user interface is fully translated to Thai, but Help is in English.
MasterLabel	Type string Properties Filter, Group, Sort Description The master label for the briefcase. This internal label doesn't get translated. Limited to 80 characters.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.

Usage

Use this object to query a briefcase or a list of briefcases with selected records and user assignments. For example:

```
SELECT Id, Description FROM BriefcaseDefinition
WHERE Id in (SELECT BriefcaseId FROM BriefcaseRule
WHERE TargetEntity='Account')
AND Id in (SELECT BriefcaseId FROM BriefcaseAssignment where
UserOrGroupId='00GR0000000VtwUMAS')
```

Associated Objects

This object has the following associated objects. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

BriefcaseDefinitionChangeEvent (API version 55.0)

Change events are available for the object.

BriefcaseRule

Represents a rule that specifies records for a briefcase definition. This object is available in API version 50.0 and later.

Special Access Rules

This object is read-only.

Supported Calls

describeSObjects(), query(), retrieve()

Fields

Field	Details
BriefcaseId	Type reference Properties Filter, Group, Sort Description Required. ID of the briefcase definition. Label is Briefcase Definition ID. This field is a relationship field. Relationship Name Briefcase Relationship Type Lookup

Field	Details
	Refers To BriefcaseDefinition
FilterLogic	Type string Properties Filter, Group, Nillable, Sort Description The filter logic for record selection, for example, 1 AND 2 where 1 and 2 correspond to filter 1 and filter 2. Filter logic operators include AND and OR. Limited to 255 characters. Label is Filter Logic .
IsAscendingOrder	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Required. Indicates whether the records should be sorted in ascending order. Label is Ascending .
OptionsIsRelatedFilesRule	Type boolean Properties Filter Description Indicates whether the briefcase rule is part of a hierarchical set of rules that configure the offline priming of file attachments. Available only for the Offline App (Salesforce Mobile App Plus).
OrderBy	Type picklist Properties Nillable, Restricted picklist Description The field to order the records by, which determines how the records can be sorted. For example, AccountName or CreatedBy. Label is Order By .
ParentRuleId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description The ID of the parent rule of this briefcase rule. This field is a relationship field. Relationship Name ParentRule Relationship Type Lookup Refers To BriefcaseRule
QueryScope	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Required. A group of records to restrict the scope of this rule. Possible values are: - assignedToMe - everything - mine The default value is <code>everything</code> (All Records). The value <code>assignedToMe</code> is available only for the <code>ServiceAppointment</code> object.
RecordLimit	Type int Properties Filter, Group, Nillable, Sort Description The record limit for the object. The recommended number for record limit is up to 500 records per object for optimal performance. The maximum number is 2000. Label is Limit.
RelationshipField	Type picklist Properties Nillable, Restricted picklist Description The Salesforce object field that relates the briefcase rule to another briefcase rule. For example, an Account rule can be related to a Contact rule using the Account ID object field. In this example, the value for the briefcase rule's <code>RelationshipField</code> is <code>AccountID</code>.
RelationshipType	Type picklist

Field	Details
	Properties Filter, Group, Nillable, Restricted picklist, Sort Description The relationship of the briefcase rule to another briefcase rule. Possible values are: • ParentToChild • ChildToParent
TargetEntity	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The standard object, custom object, or custom metadata type that the briefcase rule selects records from. The UI label is Target Object.

BriefcaseRuleFilter

Represents a filter criteria for a briefcase rule. This object is available in API version 50.0 and later.

Special Access Rules

This object is read-only.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
BriefcaseRuleId	Type reference Properties Filter, Group, Sort Description Required. ID of the briefcase rule.
FilterOperator	Type picklist

Field	Details
	Properties Filter, Group, Restricted picklist, Sort Description Required. The comparison operator for this rule filter. Possible values are: • d—Ends with • e—Equals • g—Greater than • h—Greater than or equal • i—Like • l—Less than • m—Less than or equal • s—Starts with
FilterSeqNumber	Type int Properties Filter, Group, Sort Description Required. The filter number. When you apply multiple filters, the filters are numbered sequentially, 1, 2, 3, and so on.
FilterValue	Type string Properties Filter, Group, Nillable, Sort Description The value for the field and criteria. For example, <code>true</code> or <code>false</code> for a boolean field whose criteria or filter operator is Equals. Capitalization matters with date filter operators. Be sure to specify date literals in uppercase. Some valid date literals include TODAY, YESTERDAY and TOMORROW.
TargetEntityField	Type picklist Properties Restricted picklist Description Required. The field to filter by. Compound fields and encrypted fields aren't supported. Label is Field.

BroadcastCommAudience

Represents the audience that the broadcast communication is sent to. This object is available in API version 56.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access this object with Service Cloud, enable Incident Management in Setup and set up Broadcast Communications.

Fields

Field	Details
AudienceId	Type reference Properties Create, Filter, Group, Sort Description ID of the broadcast communication audience. - If <code>BroadcastType</code> is <code>Alert</code>, this value is the ID of the Group record where the message is sent to. - If <code>BroadcastType</code> is <code>Email</code>, this value is the ID of the ListEmail record where the email is sent to. - If <code>BroadcastType</code> is <code>ExperienceSiteBanner</code>, this value is the ID of the Network record where the banner is displayed at. - If <code>BroadcastType</code> is <code>Slack</code>, this value is the ID of the CollaborationRoom record where the message is sent to. This field is a polymorphic relationship field. Relationship Name Audience Relationship Type Lookup Refers To CollaborationRoom, Group, ListEmail, Network
BroadcastCommAudienceNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort

Field	Details
	Description Auto-generated number for the BroadcastCommAudience record.
BroadcastCommunicationId	Type reference Properties Create, Filter, Group, Sort Description ID of the broadcast communication record. This field is a relationship field. Relationship Name BroadcastCommunication Relationship Type Lookup Refers To BroadcastCommunication
BroadcastFailureReason	Type string Properties Filter, Group, Nillable, Sort Description The reason the broadcast communication failed to send.
BroadcastType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Medium used to distribute the message. Possible values are: - Alert - Email - ExperienceSiteBanner - Slack
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, and LastReferenceDate is not null, the user accessed this record or list view indirectly.
MessageTimeStamp	Type string Properties Create, Filter, Group, Nillable, Sort Description If BroadcastType is Slack, this value is the timestamp when the broadcast Slack message was sent.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of this object. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
SiteBannerText	Type textarea Properties Create, Nillable Description If BroadcastType is ExperienceSiteBanner, this field contains the banner text displayed on the associated site.

Field	Details
SiteBannerVisibility	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description If <code>BroadcastType</code> is <code>ExperienceSiteBanner</code>, this field contains information about who can view the banner. Possible values are: • <code>AuthenticatedUsers</code> • <code>GuestUsers</code>
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The status of the broadcast communication. Possible values are: • <code>Active</code>—The site banner is visible on the site. Only applies if <code>BroadcastType</code> is <code>ExperienceSiteBanner</code>. • <code>Deleted</code>—The message is successfully deleted and isn't visible anymore. Only applies if <code>BroadcastType</code> is <code>Slack</code>. • <code>DeleteFailed</code>—The message failed to delete but is still visible. Only applies if <code>BroadcastType</code> is <code>Slack</code>. • <code>Failed</code>—The message failed to send. Applies to any <code>BroadcastType</code>. • <code>Inactive</code>—The site banner isn't visible on the site. Only applies if <code>BroadcastType</code> is <code>ExperienceSiteBanner</code>. • <code>Sent</code>—The message is sent successfully. Only applies if the <code>BroadcastType</code> is <code>Email</code> or <code>Slack</code>. • <code>Updated</code>—The message is successfully edited. Only applies if the <code>BroadcastType</code> is <code>Slack</code>. • <code>UpdateFailed</code>—The message failed to edit and the update isn't visible. Only applies if the <code>BroadcastType</code> is <code>Slack</code>.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[BroadcastCommAudienceChangeEvent](#) on page 68

Change events are available for the object.

BroadcastCommAudienceFeed on page 55

Feed tracking is available for the object.

BroadcastCommAudienceHistory on page 63

History is available for tracked fields of the object.

BroadcastCommAudienceOwnerSharingRule on page 65

Sharing rules are available for the object.

BroadcastCommAudienceShare on page 67

Sharing is available for the object.

BroadcastCommunication

Represents a broadcast communication related to an incident. This object is available in API version 56.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`

Special Access Rules

To access this object with Service Cloud, enable Incident Management in setup and set up Broadcast Communications.

Fields

Field	Details
Body	Type textarea Properties Create, Nillable Description • If <code>BroadcastType</code> is <code>Alert</code>, this field contains the alert message. • If <code>BroadcastType</code> is <code>Email</code>, this field contains the email body text. • If <code>BroadcastType</code> is <code>ExperienceSiteBanner</code>, this field is empty. • If <code>BroadcastType</code> is <code>Slack</code>, this field contains the Slack message.
BroadcastCommunicationNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Auto-generated number for every BroadcastCommunication record.

Field	Details
BroadcastType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Medium used to distribute the message. Possible values are: • Alert • Email • ExperienceSiteBanner • Slack
CustomNotificationTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the custom notification template used to frame the Slack message. Only applies if BroadcastType is Slack. Available in API version 58.0 and later. This field is a relationship field. Relationship Name CustomNotificationType Relationship Type Lookup Refers To CustomNotificationType
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last viewed this record or list view. If this value is null, and <code>LastReferenceDate</code> is not null, the user accessed this record or list view indirectly.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort Description ID of the owner of this object. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
RelatedRecordId	Type reference Properties Create, Filter, Group, Sort Description ID of the incident associated with the broadcast communication. This field is a relationship field. Relationship Name RelatedRecord Relationship Type Lookup Refers To Incident
Subject	Type textarea Properties Create, Nillable Description - If <code>BroadcastType</code> is <code>Alert</code>, this field is the alert message in the format "Incident Alert <Incident subject> <Incident Number>." - If <code>BroadcastType</code> is <code>Email</code>, this field is the subject of the email sent.

Field	Details
	- If <code>BroadcastType</code> is <code>ExperienceSiteBanner</code>, this field is empty. - If <code>BroadcastType</code> is <code>Slack</code>, this field is in the format "Incident Alert <Incident Subject>."

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

BroadcastCommunicationChangeEvent on page 68

Change events are available for the object.

BroadcastCommunicationFeed on page 55

Feed tracking is available for the object.

BroadcastCommunicationHistory on page 63

History is available for tracked fields of the object.

BroadcastCommunicationOwnerSharingRule on page 65

Sharing rules are available for the object.

BroadcastCommunicationShare on page 67

Sharing is available for the object.

BroadcastTopic

Represents a definition of a broadcast topic. A broadcast topic is associated with a list of Experience Cloud network sites for Service Cloud and collaboration rooms for Sales Cloud. The topic is created for a specific user role. Collaboration rooms are linked to Slack channels. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access this object with Sales Cloud, enable Slack Terms of Service and Sales Cloud for Slack App.

To access this object with Service Cloud, enable Incident Management in Setup and Broadcast Site Banner in the Incident Management setup.

Fields

Field	Details
BroadcastReason	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Reason for the broadcast topic. This field differentiates between Service Cloud and Sales Cloud use cases. Possible values are: • <code>FeedChannels</code>—Used in Sales Cloud and associates the topic with collaboration rooms. • <code>IncidentCommunication</code>—Used in Service Cloud for Customer Service Incident Management and associates the topic with networks. The default value is <code>FeedChannels</code>.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the broadcast topic.
IsFeatured	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the broadcast topic is featured (<code>true</code>) or not (<code>false</code>). This field is applicable only when <code>BroadcastReason</code> is <code>FeedChannels</code>. A featured topic displays the associated collaboration rooms to new users. The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp when the current user last accessed this record, a record related to this record, or a list view.

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the broadcast topic.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Owner of the broadcast topic. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
TopicType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Category for the broadcast topic. Possible values are: DealsWon—Feed of won deals to see your team's successes. This value appears when the Sales Cloud special access rules are enabled.

Field	Details
	• <code>DealsToWatch</code>—Feed of deals that have an amount above a specified value and are likely to close. This value appears when the Sales Cloud special access rules are enabled. • <code>Incident Communication</code>—This value appears when the Service Cloud special access rules are enabled.

BroadcastTopicGroup

Represents a junction object that relates a group to an alert type broadcast topic. The broadcast sends the alert to this group. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Enable Customer Service Incident Management and Broadcast Alert. To create a `BroadcastTopicGroup` record, set the `BroadcastReason` field of the associated `BroadcastTopic` to `Incident Communication`.

Fields

Field	Details
<code>BroadcastTopicId</code>	Type reference Properties Create, Filter, Group, Sort Description ID of the broadcast topic. This field is a relationship field. Relationship Name BroadcastTopic Relationship Type Lookup Refers To BroadcastTopic
<code>GroupId</code>	Type reference

Field	Details
	Properties Create, Filter, Group, Sort Description ID of the group where the alert of the associated BroadcastTopic record with an <code>AlertBroadcastType</code> is sent to. This field is a relationship field. Relationship Name Group Relationship Type Lookup Refers To Group
Name	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description Name of the broadcast topic group. This field is optional.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[BroadcastTopicGroupChangeEvent](#) on page 68

Change events are available for the object.

Available in API version 58.0

BroadcastTopicNetwork

Represents a link between a broadcast topic and the Experience Cloud network site for Service Cloud. This object is available in API version 56.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access this object with Service Cloud, enable Incident Management in Setup and Broadcast Site Banner in the Incident Management setup.

Fields

Field	Details
BroadcastTopicId	Type reference Properties Create, Filter, Group, Sort Description The BroadcastTopic ID that's linked to the Network. This field is a relationship field. Relationship Name BroadcastTopic Relationship Type Lookup Refers To BroadcastTopic
Name	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The name of the broadcast topic that's assigned to the network.
NetworkId	Type reference Properties Create, Filter, Group, Sort Description The Network ID that's linked to the BroadcastTopic.. This field is a relationship field. Relationship Name Network Relationship Type Lookup Refers To Network

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

BroadcastTopicNetworkChangeEvent on page 68

Change events are available for the object.

BrowserPolicyViolation

Represents a violation that occurred within the last seven days related to the Trusted URLs and Trusted URLs for External Redirects allowlists. These violations include blocked resource requests based on your content security policy (CSP) and blocked redirections. This object is available in API version 61.0 and later.

We recommend that you manage this object through the Trusted URL and Browser Policy Violations list in Setup. See [Manage Trusted URL and Browser Policy Violations](#) in Salesforce Help.

 **Note:** To help preserve performance, Salesforce uses throttling, a technique that limits the number of generated violations when the volume is exceptionally high. Therefore, if your org generates a high volume of violations over a short period of time, some of those violations can fail to generate a BrowserPolicyViolation.

To see detailed information about the captured CSP violations for your org, use the [CSP Violation Event Type](#).

To understand when Salesforce captures blocked redirections, see [External Redirection Restrictions in Salesforce](#) in Salesforce Help. For detailed information about each blocked redirection, use the [Blocked Redirect Event Type](#).

When you delete a BrowserPolicyViolation, only the logged event is removed. If your allowlists still block those requests, a new BrowserPolicyViolation is generated the next time a matching request occurs.

To help you manage the list, a daily process deletes violations that haven't occurred within the last seven days. To track browser policy violations over time, schedule daily queries of the Blocked Redirect and CSP Violations event types.

Supported Calls

`delete()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Only users with the Customize Application and Modify All Data permissions can access this object.

Fields

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort Description The developer name of the violation.

Field	Details
	Only users with View DeveloperName or View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort Description The language for the blocked request.
MasterLabel	Type string Properties Create, Filter, Group, Sort Description Master label for this violation.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description Namespace prefix for this violation.
UntrustedUrl	Type string Properties Create, Filter, Group, Nillable, Sort Description The URL associated with the blocked request, without the path. For example, if a blocked requested resource is an image with the URL <code>https://www.example.com/images/image1.png</code>, the UntrustedUrl is <code>https://www.example.com</code>.
ViolationContext	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description If the ViolationType is <code>img-src</code> (image), <code>font-src</code> (fonts), or <code>frame-src</code> (iframe content), the content security policy (CSP) context for the request. The CSP context controls which pages can load content from a CspTrustedSite.

Field	Details
	Possible values are: • <code>Lightning</code>—The blocked request is related to a Lightning Experience page. • <code>Not Applicable</code>—<code>ViolationContext</code> isn't applicable to this violation. For example, violations with a <code>ViolationType</code> of <code>Redirection</code>.
<code>ViolationImpact</code>	Type String Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The impact of this violation. Possible values are: • <code>Blocked</code>—The policy was enforced and prevented the resource from loading. The impact of blocked redirections and malformed URLs is always <code>Blocked</code>. • <code>Reported</code>—This violation is blocked only after stricter CSP settings are configured. For example, some resource requests associated with the <code>frame-src</code>, <code>font-src</code>, and <code>img-src</code> <code>ViolationType</code> are blocked only when the Adopt updated CSP directives setting is enabled in Session Settings.
<code>ViolationType</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The violation type. Possible values are: • <code>img-src</code>—At least one request to load an image file from the URL was blocked because the <code>UntrustedUrl</code> isn't a CspTrustedSite object with this CSP directive. • <code>font-src</code>—At least one request to load a font from the URL was blocked because the <code>UntrustedUrl</code> isn't a CspTrustedSite object with this CSP directive. • <code>frame-src</code>—At least one request to load content in an iframe that originated from the URL was blocked because the <code>UntrustedUrl</code> isn't a CspTrustedSite object with this CSP directive. • <code>MalformedUrl</code>—At least one redirection to this URL failed because the <code>UntrustedUrl</code> is malformed. • <code>Redirect</code>—At least one redirection to this URL was blocked because the <code>UntrustedUrl</code> isn't a RedirectWhitelistUrl object.

BulkApi2EventLog

Bulk API 2 event logs contain details about Bulk API 2.0 requests. This object is available in API version 61.0 and later.

 **Note:** This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
<code>ClientIp</code>	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.
<code>CpuTime</code>	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
<code>FailedRecordCount</code>	Type int Properties Filter, Nillable, Sort Description The total number of records that failed. For example: 150.
<code>ErrorMessage</code>	Type string Properties Filter, Nillable, Sort Description The error message returned on failure.

Field	Details
JobIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the Bulk API 2.0 job.
JobStatus	Type string Properties Filter, Group, Nillable, Sort Description The job's current status.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
ObjectType	Type string Properties Filter, Group, Nillable, Sort Description The type of event. The value is always BulkApi2.
OperationType	Type string Properties Filter, Group, Nillable, Sort Description The type of Bulk API 2.0 operation that was performed.
ProcessedRecordCount	Type double Properties Filter, Nillable, Sort

Field	Details
	Description Number of records processed for this event. For example: 980. The number of records processed is reported differently for ingest and query jobs. For <i>ingest</i> jobs: - Events with a status of <code>InProgress</code> report (if applicable) the number of records processed. For <i>query</i> jobs: - Events with a status of <code>JobComplete</code> or <code>InProgress</code> report (if applicable) the number of records processed.
RequestIdIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestId</code>. For example: 3nWgxWbDKWWDIk0FKfF5DV.
ResultSize	Type double Properties Filter, Nillable, Sort Description Number of megabytes returned in query. Empty for ingest jobs. For example: 670. ResultSizeMb currently does not emit events, but is shown here as a placeholder for future enhancement.
RunTime	Type double Properties Filter, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestId</code>. For example: 3nWgxWbDKWWDIk0FKfF5DV.
SessionKey	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: /home/home.jsp.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.

BulkApiEventLog

Bulk API event logs contain details about Bulk API requests. This object is available in API version 61.0 and later.



Note: This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
BatchIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the Bulk API batch.
ClientIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.
CpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
FailureCount	Type double Properties Filter, Nillable, Sort Description The number of failures that were returned with the request.
IsSuccess	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the callout request was successful.
JobIdentifier	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The 15-character ID of the Bulk API job.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCSym5eyvtEK2I.
Message	Type string Properties Filter, Nillable, Sort Description Any success or error message that's associated with the request.
ObjectType	Type string Properties Filter, Group, Nillable, Sort Description The type of entity that the Bulk API used.
OperationType	Type string Properties Filter, Group, Nillable, Sort Description The type of Bulk API operation that was performed.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same RequestId. For example: 3nWgxWbDKWWDIk0FKfF5DV.
RunTime	Type double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nZZVD.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: /home/home.jsp.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.

BulkApiRequestEventLog

The Bulk API request event captures when Bulk API requests are received to create a job, update a job, create a batch, update a batch, and when a job completes. This object is available in API version 65.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
<code>ApiVersion</code>	Type int Properties Filter, Group, Nillable, Sort Description The API version.
<code>BatchIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the Bulk API batch.
<code>ClientId</code>	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP".
ClientName	Type string Properties Filter, Group, Nillable, Sort Description The name of the client making the request.
ConcurrencyMode	Type string Properties Filter, Group, Nillable, Sort Description The concurrency mode selected by the user.
ConnectedAppIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the connected app making a request.
CpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
ErrorMessage	Type string Properties Filter, Group, Nillable, Sort Description The type of entity that the Bulk API used.
IsSuccess	Type boolean

Field	Details
	Properties Defaulted on create, Filter, Group, Sort Description Whether the batch was successful.
JobIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the Bulk API job
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The hash of the login id to allow click tracking across multiple transactions from login to action.
OperationType	Type string Properties Filter, Group, Nillable, Sort Description The type of Bulk API operation.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.
RequestPath	Type string Properties Filter, Group, Nillable, Sort Description The path of the request.

Field	Details
RunTime	Type double Properties Filter, Nillable, Sort Description Amount of time the request took, as measured by SFDC code.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The hash of the sid to allow click tracking across multiple transactions after login to action.
StatusCode	Type int Properties Filter, Group, Nillable, Sort Description The HTTP Status code indicating whether the batch was successful.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description Timestamp at which the log event was generated.
Uri	Type string Properties Filter, Group, Nillable, Sort Description URI of the page receiving the request.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description
	Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.

BusinessBrand

Represents a unique brand for a business that belongs to a parent entity. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
<code>LastReferencedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
<code>LastViewedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
<code>Name</code>	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Name of this business brand.

Field	Details
OrgId	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The Salesforce ID of the business brand.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the account owner associated with this business brand. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ParentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the parent entity that this business brand is a child of. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To BusinessBrand

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

BusinessBrandChangeEvent on page 68 (API version 62.0)

Change events are available for the object.

BusinessAlert

Represents information about insight notifications that Einstein Relationship Insights explores, such as news mentions, job updates, and relationships. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The BusinessAlert object is available only if the ERI Growth User or ERI Starter User license is enabled.

Fields

Field	Details
AlertData	Type textarea Properties Create, Nillable, Update Description Data associated with each alert.
AlertRecordId	Type reference Properties Create, Filter, Group, Sort, Update Description The record that's referenced by the insight alert. This field is a polymorphic relationship field. Relationship Name AlertRecord Relationship Type Lookup Refers To Account, Asset, AuthorizationForm, AuthorizationFormConsent, AuthorizationFormDataUse, AuthorizationFormText, BusinessBrand, CommSubscription, CommSubscriptionChannelType, CommSubscriptionConsent, Contact, ContactPointAddress, ContactPointConsent,

Field	Details
	ContactPointEmail, ContactPointPhone, ContactPointTypeConsent, ContentVersion, Customer, DataUseLegalBasis, DataUsePurpose, EmailMessage, EngagementChannelType, Idea, Image, Individual, Lead, Location, Opportunity, PartyConsent, Pricebook2, Product2, ProfileSkill, QuickText, Recommendation, Scorecard, ScorecardMetric, Seller, SocialPersona, SocialPost, Solution, VideoCall, WorkBadgeDefinition In addition to the listed standard object fields, this field can refer to custom objects as well,
AlertType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Specifies the type of insight alert. Possible values are: • JOB_CHANGE • NEWS • RELATIONSHIP The default value is NEWS.
CurrentDesignation	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The current designation that's related to the job alert.
CurrentEmployer	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the current employer that's related to the job alert.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed a record related to this alert record.

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this alert.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the alert record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who owns the record. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PreviousDesignation	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The previous designation that's related to the job alert.
PreviousEmployer	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the previous employer that's related to the job alert.

BusinessAlertStatus

Represents information about the read status of an insight alert. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The BusinessAlertStatus object is available only if the ERI Growth User or ERI Starter User license is enabled.

Fields

Field	Details
BusinessAlertId	Type reference Properties Create, Filter, Group, Sort Description The insight alert related to the status. This field is a relationship field. Relationship Name BusinessAlert Relationship Type Lookup Refers To BusinessAlert
IsAlertRead	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the insight alert is read by the user (true) or not (false). The default value is <code>false</code>.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort

Field	Details
	Description Specifies the activation status of the insight alert.
UserId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the user who is associated with the alert. This field is a relationship field. Relationship Name User Relationship Type Lookup Refers To User

BusinessHours

Specifies the business hours of your support organization. Escalation rules are run only during these hours.

Limit a list view to a maximum of 10,000 business hours.

If business hours are associated with any Holiday records, then business hours and escalation rules associated with business hours are suspended during the dates and times specified as holidays.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

All users, even those without the “View Setup and Configuration” user permission, can view business hours via the API.

Fields

Field	Details
BusinessHoursId	Type reference

Field	Details
	Properties Filter, Group, Nillable, Sort Description ID of the BusinessHours associated with the SlaProcess.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the business hours is active (<code>true</code>) or not active (<code>false</code>).
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the business hours.
IsDefault	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the business hours are set as the default business hours (<code>true</code>) or not (<code>false</code>).
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the business hours were last viewed.
FridayEndTime	Type time Properties Create, Filter, Nillable, Sort, Update Description Time that business closes.

Field	Details
FridayStartTime	Type time Properties Create, Filter, Nillable, Sort, Update Description Time that business opens.
MondayEndTime	Type time Properties Create, Filter, Nillable, Sort, Update Description Time that business closes.
MondayStartTime	Type time Properties Create, Filter, Nillable, Sort, Update Description Time that business opens.
SaturdayEndTime	Type time Properties Create, Filter, Nillable, Sort, Update Description Time that business closes.
SaturdayStartTime	Type time Properties Create, Filter, Nillable, Sort, Update Description Time that business opens.
SundayEndTime	Type time Properties Create, Filter, Nillable, Sort, Update Description Time that business closes.

Field	Details
SundayStartTime	Type time Properties Create, Filter, Nillable, Sort, Update Description Time that business opens.
ThursdayEndTime	Type time Properties Create, Filter, Nillable, Sort, Update Description Time that business closes.
ThursdayStartTime	Type time Properties Create, Filter, Nillable, Sort, Update Description Time that business opens.
TimeZoneSidKey	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The time zone of the business hours.
TuesdayEndTime	Type time Properties Create, Filter, Nillable, Sort, Update Description Time that business closes.
TuesdayStartTime	Type time Properties Create, Filter, Nillable, Sort, Update Description Time that business opens.

Field	Details
WednesdayEndTime	Type time Properties Create, Filter, Nillable, Sort, Update Description Time that business closes.
WednesdayStartTime	Type time Properties Create, Filter, Nillable, Sort, Update Description Time that business opens.

Usage

Use this object to specify the business hours at which your support team operates. Escalation rules only run during the business hours with which they are associated. To set business hours to 24-hours a day, set the times from midnight to midnight (00:00:00 ~ 00:00:00) on each day.

By default, business hours are set from 12:00 AM to 12:00 AM in the default time zone specified in your organization's profile.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

Business Process

Represents a business process. Business Processes track separate sales, lead, support, and solution lifecycles by displaying different picklist values according to each user's profile.

Supported Calls

`create()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of this business process. Limit: 255 characters.
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this business process can be presented to users in the Salesforce user interface (<code>true</code>) or not (<code>false</code>) when creating a new record type or changing the business process of an existing record type.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Name of this business process. Limit: 80 characters.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer.

Field	Details
	In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
<code>TableEnumOrId</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Required. One of the following values: Case, Opportunity, or Solution. Label is Entity Enumeration Or ID.

Usage

Use the `BusinessProcess` object to offer different subsets of picklist values to different users for the `LeadStatus`, `CaseStatus`, and `OpportunityStage` fields. Similar to a `RecordType`, a `BusinessProcess` identifies the type of a row in a Case, Lead, or Opportunity and implies a subset of picklist values for these three fields. The values for the remaining picklist fields are driven by `RecordType`.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

BusinessProcessDefinition

Setup object that stores information about stages in a customer lifecycle map. The stages are associated with surveys and questions created using Salesforce Surveys. This object is reserved for internal use, and is available in API version 49.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
<code>BusinessProcessGroupId</code>	Type reference Properties Filter, Group, Sort Description Unique identifier of the customer lifecycle map associated with the stage.

Field	Details
DeveloperName	Type string Properties Filter, Group, Sort Description Developer name of the stage.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language of the MasterLabel. Possible values are: • da—Danish • de—German • en_US—English • es—Spanish • es_MX—Spanish (Mexico) • fi—Finnish • fr—French • it—Italian • ja—Japanese • ko—Korean • nl_NL—Dutch • no—Norwegian • pt_BR—Portuguese (Brazil) • ru—Russian • sv—Swedish • th—Thai • zh_CN—Chinese (Simplified) • zh_TW—Chinese (Traditional)
MasterLabel	Type string Properties Filter, Group, Sort Description Label of the stage.

Field	Details
ProcessDescription	Type textarea Properties Nillable Description Description of the stage.
SequenceNumber	Type int Properties Filter, Group, Sort Description The position of the stage in the associated customer lifecycle map.

BusinessProcessFeedback

Setup object that stores information about the survey and the question associated with each stage in a customer lifecycle map. Customer lifecycle maps are used to track the scores provided by customers across their lifecycle using Salesforce Surveys. This object is reserved for internal use, and is available in API version 49.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
ActionName	Type string Properties Filter, Group, Sort Description Name of the survey used to gather feedback.
ActionParam	Type string Properties Filter, Group, Sort

Field	Details
	Description Name of the question used to gather feedback.
ActionType	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Method of collecting feedback. Possible value is: - PHONE_CALL - SURVEY
BusinessProcessDefinitionId	Type reference Properties Filter, Group, Sort Description Unique identifier of the stage associated with the survey and question.

BusinessProcessGroup

Setup object that stores information about customer lifecycle maps. Customer lifecycle maps are used to track the scores provided by customers across their lifecycle using Salesforce Surveys. This object is reserved for internal use, and is available in API version 49.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
CustomerSatisfactionMetric	Type picklist Properties Filter, Group, Restricted picklist, Sort

Field	Details
	Description Represents the question type that measures the customers' Net Promote Score or satisfaction score across their lifecycle. Possible values are: • NPS • Rating
Description	Type textarea Properties Nullable Description Description of the customer lifecycle map.
DeveloperName	Type string Properties Filter, Group, Sort Description Developer name the customer lifecycle map.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language of the MasterLabel. Possible values are: • da—Danish • de—German • en_US—English • es—Spanish • es_MX—Spanish (Mexico) • fi—Finnish • fr—French • it—Italian • ja—Japanese • ko—Korean

Field	Details
	- nl_NL—Dutch - no—Norwegian - pt_BR—Portuguese (Brazil) - ru—Russian - sv—Swedish - th—Thai - zh_CN—Chinese (Simplified) - zh_TW—Chinese (Traditional)
MasterLabel	Type string Properties Filter, Group, Sort Description Label of the customer lifecycle map.

BuyerAccount

Represents an account that is enabled as a buyer for Lightning B2B Commerce. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The BuyerAccount object is available only if the B2B Commerce license is enabled.

Fields

Field	Details
AvailableCredit	Type currency Properties Filter, Nillable, Sort Description The amount of credit available to a buyer account. This is a calculated field.

Field	Details
BuyerId	Type reference Properties Create, Filter, Group, Sort Description The ID of the buyer account. This is a relationship field. Relationship Name Buyer Relationship Type Lookup Refers To Account  Note: This field is unique within your organization.
BuyerStatus	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Status of the buyer account. Possible values are: • Active • Inactive • On Hold • Pending The default value is 'Pending'.
CommerceType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The type of commerce that the buyer account is conducting, using the Commerce app. Possible values are: • Buyer • Reseller • Seller The default value is 'Buyer'.

Field	Details
CreditLimit	Type currency Properties Create, Filter, Nillable, Sort, Update Description The limit of credit available to the buyer account.
CreditStatus	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The type or status of the buyer account's credit ranking. Possible values are: • Bad Credit • Delinquent • Good Credit • On Hold The default value is 'Good Credit'.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Three-letter ISO currency code associated with the buyer account record. Possible values are: • USD—U.S. Dollar The default value is 'USD'.
CurrentBalance	Type currency Properties Create, Filter, Nillable, Sort, Update Description The balance carried by the buyer account.
IsActive	Type boolean

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the buyer account is active (<code>true</code>) or not (<code>false</code>). The default value is 'false'.
MaximumOrderLimit	Type currency Properties Create, Filter, Nillable, Sort, Update Description The maximum number of orders that can be placed by the buyer account.
MinimumOrderLimit	Type currency Properties Create, Filter, Nillable, Sort, Update Description The minimum number of orders that can be placed by the buyer account.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the buyer account.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the buyer account owner. This is a relationship field. Relationship Name Owner Relationship Type Lookup Refers To User

Field	Details
PayerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the buyer account payer. This is a relationship field. Relationship Name Payer Relationship Type Lookup Refers To Account
SendToId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of account that an order is sent to. This is a relationship field. Relationship Name SendTo Relationship Type Lookup Refers To Account

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[BuyerAccountFeed](#) on page 55

Feed tracking is available for the object.

[BuyerAccountHistory](#) on page 63

History is available for tracked fields of the object.

[BuyerAccountShare](#) on page 67

Sharing is available for the object.

BuyerCriteria

Represents the buyer context qualifier of locale for any buyer groups of type Market This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
CriteriaKey	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. The label displayed to list supported markets with associated languages and currencies. Possible values are: • <code>Locale</code> • <code>DataCloudSegment</code>
CriteriaKeyType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. Defines the type of key. Possible values are: • <code>SessionAttributes</code> Session Attributes • <code>DataCloudObjects</code>
CriteriaValue	Type string Properties Create, Filter, Group, Sort, Update, Nillable Description Required. The value of a <code>Locale</code>. For example, <code>fr-FR</code>.

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Optional. Three letter ISO currency codes associated with the buyer account record or a locale. Auto populated if MultiCurrency is enabled in org.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The supported criteria in this record.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, and LastReferenceDate is not null, the user accessed this record or list view indirectly.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the buyer group the criteria apply to.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description ID of the member group or Admin/Merchandiser . This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Usage

BuyerCriteria is related to objects that enable a localized buyer experience. Together, these objects provide buyers with dynamic access to the qualifiers (entitlements, price books, and promotions) associated with their buyer group when they browse and shop in webstores with localized languages and currencies. The related objects are as follows:

- BuyerGroup - stores keys that link member entitlements, price books, promotions, and shipping methods to either a single currency and language or to multiple currencies and languages.
- BuyerCriteria - represents locales (languages and currencies) that are enabled for BuyerGroup members when they shop in webstores with localized currencies and languages.
- BuyerGroupBuyerCriteria - associates a buyer group that is enabled for webstores with multiple languages and currencies with BuyerCriteria that define those languages and currencies.
- BuyerGroupRelatedObject - allows BuyerGroup qualifiers (entitlements, price books, and promotions) to be available in multiple languages and currencies without duplicating the qualifiers for each language and currency.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

BuyerCriteriaFeed on page 55

Feed tracking is available for the object.

BuyerCriteriaHistory on page 63

History is available for tracked fields of the object.

BuyerCriteriaOwnerSharingRule on page 65

Sharing rules are available for the object.

BuyerCriteriaShare on page 67

Sharing is available for the object.

BuyerGroup

Associates group qualifiers (entitlements, price books, promotions, and shipping methods) with buyer members based on buyer account ID or on the localized language and currency of the market browsed in a webstore. This object is available in API version 57.0; amended to support Market in version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Buyer group details.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, and <code>LastReferenceDate</code> is not null, the user accessed this record or list view indirectly.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the buyer group.

Field	Details
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the creator of this object. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
RecordTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the record type of the version This field is a relationship field. Relationship Name RecordType Relationship Type Lookup Refers To RecordType
Role	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Determines a fixed or dynamic relationship to the language and currency that products, promotions, and entitlements are displayed in. Possible values are: - AccountBased - Market - DataCloudSegments

Field	Details
	The default value is <code>AccountBased</code> . When set to <code>Market</code> , and when the org has multiple locales, the currency and language for qualifiers (price books, promotions, entitlements) dynamically change as the buyer views different locale-based markets.

Usage

BuyerGroup is related to objects that enable a localized buyer experience. Together, these objects provide buyers with dynamic access to the qualifiers (entitlements, price books, and promotions) associated with their buyer group when they browse and shop in webstores with localized languages and currencies. The related objects are as follows:

- BuyerGroup - stores keys that link member entitlements, price books, promotions, and shipping methods to either a single currency and language or to multiple currencies and languages.
- BuyerCriteria - represents locales (languages and currencies) that are enabled for BuyerGroup members when they shop in webstores with localized currencies and languages.
- BuyerGroupBuyerCriteria - associates a buyer group that is enabled for webstores with multiple languages and currencies with BuyerCriteria that define those languages and currencies.
- BuyerGroupRelatedObject - allows BuyerGroup qualifiers (entitlements, price books, and promotions) to be available in multiple languages and currencies without duplicating the qualifiers for each language and currency.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

BuyerGroupChangeEvent on page 68

Change events are available for the object.

BuyerGroupFeed on page 55

Feed tracking is available for the object.

BuyerGroupHistory on page 63

History is available for tracked fields of the object.

BuyerGroupOwnerSharingRule on page 65

Sharing rules are available for the object.

BuyerGroupShare on page 67

Sharing is available for the object.

BuyerGroupBuyerCriteria

Associates a buyer group that is enabled for webstores supporting multiple languages and currencies with BuyerCriteria that define those languages and currencies. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
BuyerCriteriaId	Type reference Properties Create, Filter, Group, Sort, Update Description Required. ID of the buyer criteria this record is associated with. This field is a relationship field. Relationship Name BuyerCriteria Relationship Type Lookup Refers To BuyerCriteria
BuyerGroupId	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the buyer group this record is associated with. This field is a relationship field. Relationship Name BuyerGroup Relationship Type Lookup Refers To BuyerGroup
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Optional. Three letter ISO currency codes associated with the buyer account record or a locale. Auto populated if MultiCurrency is enabled in org.
Name	Type string

Field	Details
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description Name of this record.

Usage

BuyerGroupBuyerCriteria is related to objects that enable a localized buyer experience. Together, these objects provide buyers with dynamic access to the qualifiers (entitlements, price books, and promotions) associated with their buyer group when they browse and shop in webstores with localized languages and currencies. The related objects are as follows:

- BuyerGroup - stores keys that link member entitlements, price books, promotions, and shipping methods to either a single currency and language or to multiple currencies and languages.
- BuyerCriteria - represents locales (languages and currencies) that are enabled for BuyerGroup members when they shop in webstores with localized currencies and languages.
- BuyerGroupBuyerCriteria - associates a buyer group that is enabled for webstores with multiple languages and currencies with BuyerCriteria that define those languages and currencies.
- BuyerGroupRelatedObject - allows BuyerGroup qualifiers (entitlements, price books, and promotions) to be available in multiple languages and currencies without duplicating the qualifiers for each language and currency.

BuyerGroupMember

Represents a member of a buyer group. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The BuyerGroupMember object is available only if the Commerce Buyer and Entitlements Integrator permission is granted.

Fields

Field	Details
BuyerGroupId	Type reference
	Properties Create, Filter, Group, Sort

Field	Details
	Description The ID of the buyer group to which the member belongs. BuyerGroupId is a relationship field. Relationship Name BuyerGroup Relationship Type Lookup Refers To BuyerGroup
BuyerId	Type reference Properties Create, Filter, Group, Sort Description The ID of the account or guest buyer profile. BuyerId is a polymorphic relationship field. Relationship Name Buyer Relationship Type Lookup Refers To Account, GuestBuyerProfile
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the buyer group member.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, idLookup, Sort Description The ID of the member group or user. OwnerId is a polymorphic relationship field. Relationship Name Owner

Field	Details
	Relationship Type Lookup
	Refers To Group, User

BuyerGroupPricebook

Represents a buyer group price book used in Lightning B2B Commerce. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The BuyerGroupPricebook object is available only if the B2B Commerce license is enabled.

Fields

Field	Details
BuyerGroupId	Type reference Properties Create, Filter, Group, Sort Description The ID of the buyer group that the price book record is assigned to.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether the BuyerGroupPricebook is active (<code>true</code>) or not (<code>false</code>). Default value is <code>false</code> .
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the Buyer Group Price Book record.
Pricebook2Id	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the price book assigned to the buyer group.
Priority	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The sequential priority used to determine the price of a product. This field is only available for web stores that use the Priority pricing strategy.

Usage

Use the BuyerGroupPricebook object to assign a price book to a set of buyer users. Assigning a price book to a buyer group allows buyers within that buyer group to retrieve product prices from the price book. When a buyer has multiple price book assignments, including multiple prices for the same product, the store Pricing Strategy determines the price.

BuyerGroupRelatedObject

Used to associate currencies and supported ship-to countries with a buyer group and its price books, promotions, and entitlements. Supports buyer experience when buyer group members shop in stores enabled for multiple locales. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

BuyerGroupRelatedObject is available only if the org is Market Enabled (`Commerce.orgHasCommerceMarketEnabled`).

Fields

Field	Details
BuyerGroupId	Type reference Properties Create, Filter, Group, Sort, Update Description Required. ID of the buyer group this record is associated with. This field is a relationship field. Relationship Name BuyerGroup Relationship Type Lookup Refers To BuyerGroup
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
LastViewedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, and <code>LastReferenceDate</code> is not null, the user accessed this record or list view indirectly..
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of this record.
ObjectType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. The names displayed in the picklist showing the ObjectValues - currency and ship-to countries. Possible values are: • <code>DefaultCurrency</code> - Default Currency • <code>SupportedShipToCountries</code> - Supported Ship-to Countries
ObjectValues	Type textarea Properties Create, Nillable, Update Description Optional. Values for ObjectType. The actual currency and supported ship-to countries. Possible values are: • Three-letter ISO currency code associated with the buyer account or a supported locale. • ISO country code for supported ship-to countries.

Usage

BuyerGroupRelatedObject is related to objects that enable a localized buyer experience. Together, these objects provide buyers with dynamic access to the qualifiers (entitlements, price books, and promotions) associated with their buyer group when they browse and shop in webstores with localized languages and currencies. The related objects are as follows:

- BuyerGroup - stores keys that link member entitlements, price books, promotions, and shipping methods to either a single currency and language or to multiple currencies and languages.

- **BuyerCriteria** - represents locales (languages and currencies) that are enabled for BuyerGroup members when they shop in webstores with localized currencies and languages.
- **BuyerGroupBuyerCriteria** - associates a buyer group that is enabled for webstores with multiple languages and currencies with BuyerCriteria that define those languages and currencies.
- **BuyerGroupRelatedObject** - allows BuyerGroup qualifiers (entitlements, price books, and promotions) to be available in multiple languages and currencies without duplicating the qualifiers for each language and currency.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

BuyerGroupRelatedObjectChangeEvent on page 68

Change events are available for the object.

BuyerGroupRelatedObjectFeed on page 55

Feed tracking is available for the object.

BuyerGroupRelatedObjectHistory on page 63

History is available for tracked fields of the object.

CalcProcStepRelationship

Defines a parent-child relationship between two Expression Set Steps in an Expression Set Version. The label for this object is Expression Set Step Relationship. This object is available in API version 53.0 and later.



Note: This object has been deprecated as of API version 55.0. In API version 55.0 and later, use the new Expression Set objects in Business Rules Engine instead.

Parent-child step relationships collectively determine the step order.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Access to Expression Sets requires OmniStudio licenses.

Fields

Field	Details
CalcProcStepId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The ID of the child Expression Set Step. This is a relationship field. Relationship Name CalcProcStep Relationship Type Lookup Refers To CalculationProcedureStep
CalcProcVersionId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the related Expression Set Version. This is a relationship field. Relationship Name CalcProcVersion Relationship Type Lookup Refers To CalculationProcedureVersion
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The Expression Set Step Relationship name.
ParentCalcProcStepId	Type reference Properties Create, Filter, Group, Sort Description The ID of the parent Expression Set Step. This is a relationship field. Relationship Name ParentCalcProcStep

Field	Details
	Relationship Type Lookup Refers To CalculationProcedureStep
RelationshipType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of relationship between the parent and child steps. Possible values are: • Bypass—The parent is a condition step. If the condition is false, the child is the next step. • ParentChild—The child is the next step after the parent.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[CalcProcStepRelationshipFeed](#) on page 55

Feed tracking is available for the object.

[CalcProcStepRelationshipHistory](#) on page 63

History is available for tracked fields of the object.

CalculatedInsightRangeBound

Stores the information required to calculate a range-bound data insight. This object is available in API version 59.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available only if a B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
InsightName	Type string Properties Create, Filter, Group, Sort Description Name of the calculated insight.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
LowerBoundRange	Type double Properties Create, Filter, Sort, Update Description The lower limit of the calculated insight.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The autogenerated name of the insight.
Operator	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Operation used to calculate the insight based on the upper bound range and lower bound range. Possible values are: - EQUAL_TO - GREATER_THAN - GREATER_THAN_EQUAL_TO - LESS_THAN - LESS_THAN_EQUAL_TO
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the contact who owns the insight. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
SalesStoreId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the webstore associated with the insight benchmarks. This field is a relationship field. Relationship Name SalesStore Relationship Type Lookup Refers To WebStore

Field	Details
UpperBoundRange	Type double Properties Create, Filter, Nillable, Sort, Update Description The upper limit of the calculated insight.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[CalculatedInsightRangeBoundOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[CalculatedInsightRangeBoundShare](#) on page 67

Sharing is available for the object.

CalculationMatrix

Matches input values to a table row and returns the row's output values. The label for this object is Decision Matrix. This object is available in API version 53.0 and later.

Decision Matrices are useful for implementing complex rules in a systematic, readable way. There are two types: Standard and Grouped. A Grouped Decision Matrix groups rows in different versions by one or two keys such as geographic region or product code.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Access to Decision Matrices requires Omnistudio licenses.

Fields

Field	Details
DecisionMatrixDefinitionId	Type reference Properties Create, Filter, Group, Nillable, Sort

Field	Details
	Description The decision matrix definition record associated with this calculation matrix. This field is a polymorphic relationship field. Relationship Name DecisionMatrixDefinition Relationship Type Lookup Refers To DecisionMatrixDefinition, DecisionTable
DecisionMatrixType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the type of lookup table. Possible values are: • DecisionMatrix • DecisionTable The default value is DecisionMatrix.
Description	Type textarea Properties Create, Nillable, Update Description A text description of the Decision Matrix.
GroupKey	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A key for grouping matrix rows in different versions, such as geographic region or product code.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible the user only accessed this record or list view (LastReferencedDate) but didn't view it.
MigrationStatus	Type textarea Properties Nillable Description The status of migrating the data from the Calculation Matrix object to the Decision Matrix Definition object.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The Decision Matrix name.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who currently owns this matrix. Default value is the user logged in to the API to perform the create action. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Field	Details
SubGroupKey	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A subkey for grouping matrix rows in different versions, such as geographic region or product code. For example, if the <code>GroupKey</code> is <code>Country</code>, the <code>SubGroupKey</code> can be <code>State</code> or <code>Province</code>.
Type	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The Decision Matrix type. A Standard Decision Matrix has no special features. A Grouped Decision Matrix groups rows by one or two keys (<code>GroupKey</code> and <code>SubGroupKey</code>) such as geographic region or product code. Possible values are: • Grouped • Standard
UniqueName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The unique identifier of the record, which is sourced from the value in the <code>Name</code> field of <code>CalculationMatrix</code> (decision matrix). For example, if the name of the calculation matrix is <code>sample matrix</code>, its <code>UniqueName</code> would be <code>sample_matrix</code>.
UsageType	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description A decision matrix's usage type. Available in API version 59.0 and later. Possible value is: • Bre-Default

Field	Details
	When Business Rules Engine is enabled on your Salesforce org, the default value is Bre. Other usage types may be available to you depending on your industry solution and permission sets.

Usage

Expression Sets, OmniScripts, and Integration Procedures can call Decision Matrices.

CalculationMatrixColumn

Defines a column in a Decision Matrix. The label for this object is Decision Matrix Column. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Access to Decision Matrices requires Omnistudio licenses.

Fields

Field	Details
ApiName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The API name of the column.
CalculationMatrixId	Type reference Properties Create, Filter, Group, Sort Description The ID of the Decision Matrix to which this column belongs. This is a relationship field.

Field	Details
	Relationship Name CalculationMatrix Relationship Type Lookup Refers To CalculationMatrix
ColumnType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Specifies whether the column matches matrix input or is returned as output. Possible values are: • Input • Output
DataType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The type of data in the column. Possible values are: • Boolean • Currency • Number • NumberRange • Percent • Text • TextRange
DisplaySequence	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The position of this column in the column order.

Field	Details
IsWildcardColumn	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Specifies that this column can contain a wildcard value such as <code>ALL</code>. The default value is <code>false</code>.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The column name.
RangeValues	Type textarea Properties Create, Nillable, Update Description A list of values that define range boundaries.
WildcardColumnValue	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The value that indicates a wildcard, for example <code>ALL</code>. Applicable if <code>IsWildcardColumn</code> is <code>true</code>.

CalculationMatrixRow

Defines a row in a Decision Matrix. The label for this object is Decision Matrix Row. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Access to Decision Matrices requires Omnistudio licenses.

Fields

Field	Details
CalculationMatrixVersionId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the Decision Matrix Version to which this row belongs. This is a relationship field. Relationship Name CalculationMatrixVersion Relationship Type Lookup Refers To CalculationMatrixVersion
EndDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The last date on which this row version is active. Applicable if <code>IsVersionEnabled</code> is <code>true</code>.
InputData	Type textarea Properties Create, Nillable, Update Description The input columns and associated values for this row of the matrix.
IsVersionEnabled	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Specifies whether the associated matrix version is active. Derived from the associated Decision Matrix Version (CalculationMatrixVersion object). The default value is <code>false</code> .
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The row name.
OutputData	Type textarea Properties Create, Nillable, Update Description The output columns and associated values for this row of the matrix.
StartDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The first date on which this row version is active. Applicable if <code>IsVersionEnabled</code> is <code>true</code> .

CalculationMatrixVersion

Defines a version of a Decision Matrix. The label for this object is Decision Matrix Version. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Access to Decision Matrices requires Omnistudio licenses.

Fields

Field	Details
ApiName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The API name of the decision matrix version. This field is available in API version 56.0 and later.
CalculationMatrixId	Type reference Properties Create, Filter, Group, Sort Description The ID of the Decision Matrix to which this version belongs. This is a relationship field. Relationship Name CalculationMatrix Relationship Type Lookup Refers To CalculationMatrix
DecisionMatrixDefinitionVerId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The decision matrix definition version associated with this calculation matrix version. This field is a relationship field. Relationship Name DecisionMatrixDefinitionVer Relationship Type Lookup Refers To DecisionMatrixDefinitionVersion
DscnModelNoteExportStatus	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort Description Indicates the export status of a decision matrix version in the Decision Model and Notation (DMN) format. Possible values are: • Initiated • InProgress • Complete • Failed
EndTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The last date on which this matrix version is active.
GroupKey	Type string Properties Filter, Group, Nillable, Sort Description A key for grouping matrix rows in different versions, such as geographic region or product code. Derived from the associated Decision Matrix (CalculationMatrix object).
GroupKeyValue	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The value of the GroupKey for this version. For example, if the GroupKey is Country, the GroupKeyValue can be United States.
IsEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Specifies whether this version is active. The default value is <code>false</code>.

Field	Details
LoadProcessStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The status of a data upload from a <code>.csv</code> file. Possible values are: - Completed - CompletedWithErrors - Failed - InProgress - Pending
MatrixType	Type string Properties Filter, Group, Nillable, Sort Description The matrix type, either <code>Standard</code> or <code>Grouped</code>. A Grouped Decision Matrix groups rows in different Decision Matrix Versions by one or two keys such as geographic region or product code. Derived from the associated Decision Matrix (CalculationMatrix object).
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The matrix version name.
Rank	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description When the invocation time of a matrix call is between the <code>StartDateTime</code> and <code>EndDateTime</code> of more than one enabled matrix version, the version with the highest <code>Rank</code> is chosen.
StartDateTime	Type dateTime

Field	Details
	Properties Create, Filter, Nillable, Sort, Update Description The first date on which this matrix version is active.
SubGroupKey	Type string Properties Filter, Group, Nillable, Sort Description A subkey for grouping matrix rows in different versions, such as geographic region or product code. For example, if the <code>GroupKey</code> is <code>Country</code> , the <code>SubGroupKey</code> can be <code>State</code> or <code>Province</code> . Derived from the associated Decision Matrix (<code>CalculationMatrix</code> object).
SubGroupKeyValue	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The value of the <code>SubGroupKey</code> for this version. For example, if the <code>SubGroupKey</code> is <code>State</code> or <code>Province</code> , the <code>SubGroupKeyValue</code> can be <code>California</code> .
VersionNumber	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The version number.

CalculationProcedure

Performs a series of calculations using matrix lookups and user-defined variables and constants. The label for this object is Expression Set. This object is available in API version 53.0 and later.



Note: This object has been deprecated as of API version 55.0. In API version 55.0 and later, use the new Expression Set objects in Business Rules Engine instead.

Expression Sets accept input variables and return output variables, both in JSON format. Expression Sets are especially useful for determining prices, rates, and quotes.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Access to Expression Sets requires OmniStudio licenses.

Fields

Field	Details
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A text description of the Expression Set.
InputVariablesMetadata	Type textarea Properties Create, Nillable, Update Description Metadata for the Expression Set's input variables.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible the user only accessed this record or list view (<code>LastReferencedDate</code>) but didn't view it.

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The Expression Set name.
OutputVariablesMetadata	Type textarea Properties Create, Nillable, Update Description Metadata for the Expression Set's output variables.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who currently owns this Expression Set. Default value is the user logged in to the API to perform the create action. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Usage

OmniScripts and Integration Procedures can call Expression Sets. Expression Sets can call Decision Matrices.

CalculationProcedureStep

Defines a step in an Expression Set. The label for this object is Expression Set Step. This object is available in API version 53.0 and later.



Note: This object has been deprecated as of API version 55.0. In API version 55.0 and later, use the new Expression Set objects in Business Rules Engine instead.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Access to Expression Sets requires OmniStudio licenses.

Fields

Field	Details
CalculationMatrixId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the Decision Matrix this step calls. Applicable only if the <code>StepType</code> is <code>MatrixLookup</code> or <code>GroupMatrixLookup</code>. This is a relationship field. Relationship Name CalculationMatrix Relationship Type Lookup Refers To CalculationMatrix
CalculationMatrixType	Type string Properties Filter, Group, Nillable, Sort Description The type of the Decision Matrix this step calls. Applicable only if this step calls a Decision Matrix. If the <code>StepType</code> is <code>MatrixLookup</code>, the value of this field is <code>Standard</code>. If the <code>StepType</code> is <code>GroupMatrixLookup</code>, the value of this field is <code>Grouped</code>.
CalculationProcedure	Type string Properties Filter, Group, Nillable, Sort Description The ID of the Expression Set to which this step belongs.

Field	Details
CalculationProcedureVersionId	Type reference Properties Create, Filter, Group, Sort Description The ID of the Expression Set Version to which this step belongs. This is a relationship field. Relationship Name CalculationProcedureVersion Relationship Type Lookup Refers To CalculationProcedureVersion
ConditionsConvertedText	Type textarea Properties Create, Nillable, Update Description The condition expression converted to postfix notation. Applicable only if the <code>StepType</code> is <code>Condition</code>.
ConditionsExpressionText	Type textarea Properties Create, Nillable, Update Description The condition expression as the user entered it. Applicable only if the <code>StepType</code> is <code>Condition</code>.
ConditionsUiFormattedText	Type textarea Properties Create, Nillable, Update Description The condition expression converted to JSON format for UI display. Applicable only if the <code>StepType</code> is <code>Condition</code>.
Description	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description A text description of the Expression Set Step.
FormulaConvertedText	Type textarea Properties Create, Nillable, Update Description The formula expression converted to postfix notation. Applicable only if the <code>StepType</code> is <code>Calculation</code>.
FormulaExpressionText	Type textarea Properties Create, Nillable, Update Description The formula expression as the user entered it. Applicable only if the <code>StepType</code> is <code>Calculation</code>.
FormulaUiFormattedText	Type textarea Properties Create, Nillable, Update Description The formula expression converted to JSON format for UI display. Applicable only if the <code>StepType</code> is <code>Calculation</code>.
InputVariablesFormatText	Type textarea Properties Create, Nillable, Update Description A list of the input matrix columns or procedure variables applicable to the step.
IsConditionalStep	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Specifies that this step is conditional.

Field	Details
	The default value is <code>false</code> .
IsResultIncluded	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Specifies that the result of this step is included in the Expression Set output. The default value is <code>false</code>.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The step name.
OutputVariablesFormatText	Type textarea Properties Create, Nillable, Update Description A list of the output matrix columns or procedure variables applicable to the step. Applicable only if the <code>StepType</code> is <code>MatrixLookup</code>, <code>GroupMatrixLookup</code>, or <code>ReferenceProcedure</code>.
OutputVariablesMappingText	Type textarea Properties Create, Nillable, Update Description Maps Decision Matrix output variables to Expression Set variables. Applicable only if the <code>StepType</code> is <code>MatrixLookup</code> or <code>GroupMatrixLookup</code>.
ReferenceProcedureId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the child Expression Set this step calls. Applicable only if the <code>StepType</code> is <code>ReferenceProcedure</code>. This is a relationship field.

Field	Details
	Relationship Name ReferenceProcedure Relationship Type Lookup Refers To CalculationProcedure
ReturnMessageValueSet	Type textarea Properties Create, Nillable, Update Description A set of messages to return based on the result of a step with a <code>StepType</code> of <code>Condition</code> .
Stage	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The stage of Expression Set invocation. The <code>Aggregation</code> stage applies only to steps with a <code>StepType</code> of <code>Aggregation</code> . Possible values are: • <code>Aggregation</code> • <code>Calculation</code>
StageStepSequence	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Sequence order of the step within the Expression Set. Used only for Expression Sets migrated from a Salesforce Industries package. New Expression Sets use Expression Set Step Relationship objects to order their steps.
StepType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of action this step performs. Possible values are:

Field	Details
	• Aggregation—Returns an average, maximum, minimum, or sum of a list of values. • Calculation—Performs a mathematical operation, which can include variables and constants. • Condition—Defines a condition that determines whether other steps are invoked. • GroupMatrixLookup—Calls a Grouped Decision Matrix. • MatrixLookup—Calls a Standard Decision Matrix. • ReferenceProcedure—Calls a child Expression Set.

CalculationProcedureVariable

Defines a variable in an Expression Set. The label for this object is Expression Set Variable. This object is available in API version 53.0 and later.



Note: This object has been deprecated as of API version 55.0. In API version 55.0 and later, use the new Expression Set objects in Business Rules Engine instead.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Access to Expression Sets requires OmniStudio licenses.

Fields

Field	Details
ApiName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The API name of this variable.
CalculationMatrixName	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The name of the Decision Matrix to which this variable belongs. Applicable only if this variable references a Decision Matrix column.
CalculationProcedureVersionId	Type reference Properties Create, Filter, Group, Sort Description The ID of the Expression Set Version to which this variable belongs. This is a relationship field. Relationship Name CalculationProcedureVersion Relationship Type Lookup Refers To CalculationProcedureVersion
DataType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The data type of this variable. Possible values are: • Boolean • Currency • Date • Number • Percent • Text
DefaultValue	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The default value of this variable.

Field	Details
DisplayName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The user-readable name of this variable.
IsEditable	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If <code>true</code>, specifies that a variable is NOT auto-imported from a step that calls a Decision Matrix or a child Expression Set. The default value is <code>false</code>.
IsUserDefined	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Specifies whether a variable is defined by the user. The default value is <code>false</code>.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of this variable.
Precision	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of decimal places. Applicable if the <code>DataType</code> is Currency, Number, or Percent.
UiDisplayOrder	Type int

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The display order of the variable in the UI.

CalculationProcedureVersion

Defines a version of an Expression Set. The label for this object is Expression Set Version. This object is available in API version 53.0 and later.



Note: This object has been deprecated as of API version 55.0. In API version 55.0 and later, use the new Expression Set objects in Business Rules Engine instead.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Access to Expression Sets requires OmniStudio licenses.

Fields

Field	Details
CalculationProcedureId	Type reference
	Properties Create, Filter, Group, Sort
	Description The ID of the Expression Set to which this version belongs. This is a relationship field.
	Relationship Name CalculationProcedure
	Relationship Type Lookup
	Refers To CalculationProcedure

Field	Details
Constants	Type textarea Properties Create, Nillable, Update Description A serialized JSON object containing information about each constant. This information includes the name, data type, alias, and precision.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A text description of the Expression Set Version.
EndTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The last date on which this Expression Set Version is active.
IsEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Specifies whether this Expression Set Version is active. The default value is <code>false</code>.
IsLoopingEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Specifies whether looping is enabled in this Expression Set Version. The default value is <code>false</code>.
LastSimulatedVariablesInput	Type textarea

Field	Details
	Properties Create, Nillable, Update Description The input variables and results of the most recent simulation.
LoopEnd	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the end variable for looping.
LoopIncrement	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the interval variable for looping.
LoopStart	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the start variable for looping.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The version name.
Rank	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description When more than one enabled version matches an Expression Set call, and the <code>StartDateTime</code> to <code>EndTimeTime</code> spans overlap, the version with the highest <code>Rank</code> is chosen.

Field	Details
StartDateTime	Type dateTime Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description The first date on which this Expression Set Version is active.
VersionNumber	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The version number.

Calendar

Represents a calendar. This can be a default user calendar, public calendar, resource calendar, or holiday calendar. This object is available in API version 45.0 and later.

Newly created users are assigned a default calendar automatically. Similarly, holiday calendars are created automatically for each organization.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`, `search()`

Special Access Rules

Users with "View Setup and Configuration" user permissions can create, edit, and delete public and resource calendars in the user interface. All users, even those without the "View Setup and Configuration" user permission, can view calendars via the API.

Fields

All fields are readable only.

Field	Details
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description This field indicates whether a user can save events to the calendar.
Name	Type string Properties Filter, Group, idLookup, Sort Description A user provided name that identifies the calendar. It is text-indexed for searchability. Note that this is not an enumerated field; it can be any string to a maximum length of 80 characters.
Type	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of the calendar. Possible values are: • <code>Holiday</code> (Holiday Calendar) • <code>Public</code> (Public Calendar) • <code>Resource</code> (Resource Calendar) • <code>User</code> (User Calendar)
UserId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user that owns that calendar record. If Type=User, there's a UserID associated (foreign key reference to the user). Otherwise, the user field is null.

CalendarView

These calendars can be created and assigned to users other than the creator. Available calendars include object, shared, public, resource, and user list calendars. Object calendars represent a calendar based on a Salesforce object, either standard or custom. This object is available in API version 51.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

All fields and entities referenced by field values must be accessible by the CalendarView creator even if the creator isn't the CalendarView owner.

Fields

Field	Details
Color	Type string Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description Represents the color used in the background for records displayed in a user's calendar view within the user interface.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for organizations with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
DateHandlingType	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Determined by the data type of the <code>StartField</code>. Valid values include: • Date • Datetime
DisplayField	Type string Properties Create, Filter, Group, Sort, Update Description Represents the <code>SubjectType</code> field used as the subject for records displayed in a user's calendar view within the user interface.
EndField	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description An optional field that represents the sObjectType field used as the end time for records displayed in a user's calendar view within the user interface. Must be a date or dateTime field that matches the type in <code>StartField</code>.
FillPattern	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Represents the pattern displayed as the background for records displayed in a user's calendar view within the user interface. Valid values include: • <code>verticalStripes</code> • <code>ascDiagonalStripes</code> • <code>descDiagonalStripes</code>
IsDisplayed	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Defines whether users can see a calendar's records in their calendar view in the user interface. When <code>true</code>, records are visible in the user's calendar view. When <code>false</code>, records are hidden from the user's calendar view. The default is <code>true</code>. <code>IsDisplayed</code> can be <code>true</code> for up to 50 calendars.
ListViewFilterId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description References the ListView used to filter records represented by the CalendarView. ListView must have the same sObjectType. If no <code>ListViewFilterId</code> is defined, the calendar displays only records with the same owner as the CalendarView. This is a relationship field. Relationship Name ListViewFilter Relationship Type Lookup

Field	Details
	Refers To ListView
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description A user-provided name that identifies the calendar. This isn't an enumerated field; it can be any string to a maximum length of 80 characters.
OwnerId	Type reference Properties Create, Filter, Group, Sort Description Represents the owner of the CalendarView. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PublisherId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Represents the user, user list, public, or resource calendar from where event data is populated. This is a polymorphic relationship field. Relationship Name Publisher Relationship Type Lookup Refers To Calendar, ListView, User
SubjectType	Type picklist

Field	Details
	Properties Create, Filter, Group, Restricted picklist, Sort
	Description The type of standard or custom Salesforce object that is used to create records for the CalendarView. Use the API name of the desired <code>ObjectType</code> .
StartField	Type string
	Properties Create, Filter, Group, Sort, Update
	Description Represents the <code>ObjectType</code> field used as the start time for records displayed in a user's calendar view within the user interface. Must be a date or dateTime field type.

Usage

To distribute a CalendarView to multiple users, IDs can be pulled from a group, user list, or profile. For this example, a CalendarView based on opportunity close dates is being distributed to a sales team in a public group, Sales Group:

```
Group userGroup = [SELECT Id FROM Group WHERE Name = 'Sales Group' LIMIT 1];
List<Id> groupId = new List<Id>();
groupId.add(userGroup.id);
List<GroupMember> groupMembers = [SELECT UserOrGroupId FROM GroupMember
    WHERE GroupId IN: groupId];

List<CalendarView> calendarViews = new List<CalendarView>();
for (GroupMember groupMember : groupMembers) {
    CalendarView calendarView = new CalendarView(name = 'Opportunity Close Dates',
        ObjectType = 'Opportunity', StartField = 'CloseDate', DisplayField =
        'Name', OwnerId = groupMember.UserOrGroupId);
    calendarViews.add(calendarView);
}
insert calendarViews;
```

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

CalendarViewChangeEvent (API version 62.0)

Change events are available for the object.

CallCenter

Represents a call center, which is a logical representation of a single computer-telephony integration (CTI) system instance in an organization.

Supported Calls

`create()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
AdapterUrl	Type string Properties Create, Filter, Group, Nillable, Sort Description An optional field that specifies the location of where the CTI adapter is hosted. For example, <code>http://localhost:11000</code>. This field is available in API version 23.0 or later.
CustomSettings	Type string Properties Create, Filter, Nillable, Sort Description Specifies settings in the call center definition file, such as whether the call center uses the Open CTI, and SoftPhone properties, such as height in pixels. This field is available for Open CTI and in API version 25.0 or later.
Id	Type ID Properties Defaulted on create, Filter Description System field that uniquely identifies this call center. Label is Call Center ID. This ID is created automatically when the call center is created.

Field	Details
InternalName	Type string Properties Create, Filter, Group, Sort Description The internal name of the call center. Limit is 80 characters.
Name	Type string Properties Create, Filter, Group, idLookup, Sort Description The name of the call center. Limit is 80 characters.
Version	Type double Properties Create, Filter, Nillable, Sort Description The version of the CTI Toolkit used to create the call center (for versions 2.0 and later). This field is available in API version 18.0 and later.

Usage

Create a call center or query an existing call center.

CallCenterRoutingMap

Stores a mapping between a user or queue in a Salesforce org to a user or queue in an external system's call center. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Access to standard objects requires Salesforce admin privileges or the Customize Application permission.

Access to call center routing map records requires Contact Center Admin, Contact Center Admin (Partner Telephony), Contact Center Supervisor, or Manage Call Centers permission.

Fields

Field	Details
CallCenterId	Type reference Properties Create, Filter, Group, Sort, Update Description Reference to a call center. This is a relationship field. Relationship Name CallCenter Relationship Type Lookup Refers To CallCenter
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The developer name is a combination of the Salesforce user ID or queue name, and the call center ID, with an underscore between these two values. • [SALESFORCE_USER_ID]_[CALL_CENTER_ID] • [SALESFORCE_QUEUE_NAME]_[CALL_CENTER_ID]
ExternalId	Type string Properties Create, Filter, Group, Sort, Update Description Unique identifier for the external system's user or queue.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description The language of the MasterLabel.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The master label of the CallCenterRoutingMap.
QuickConnect	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The Amazon Connect QuickConnectId ARN used to determine agent availability for Omni-Channel call transfers. Available in API version 56.0 and later. This is a polymorphic relationship field.
ReferenceRecordId	Type reference Properties Create, Filter, Group, Sort, Update Description Lookup field to a Salesforce user or queue. This is a polymorphic relationship field. Relationship Name ReferenceRecord Relationship Type Lookup Refers To Group, User

CallCoachingMediaProvider

Represents the media provider for call recordings. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Whether the connection with the provider is active or not.
ProviderDescription	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the media provider.
ProviderName	Type string Properties Create, Filter, Group, idLookup, Sort Description The name of the media provider.

CallCtrAgentFavTrfrDest

Represents a transfer destination that has been marked (starred) as a favorite in the Omni-Channel softphone by a contact center agent for voice call transfers. This object is available in API version 55.0 and later.

To see a list of transfer destinations that have been marked as favorites in the Omni-Channel softphone, add a participant to the call, click the Phone tab, and select **Favorite** from the Filter dropdown menu. Examples of transfer destination types include agents, contacts, directories, flows, and queues.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AgentId	Type reference Properties Create, Filter, Group, Sort, Update Description The unique ID of the contact center agent who marked the transfer destination as a favorite. This field is a relationship field. Relationship Name Agent Relationship Type Lookup Refers To User
CallCenterId	Type reference Properties Create, Filter, Group, Sort, Update Description The unique ID of the contact center from where the agent starred the transfer destination as a favorite. This field is a relationship field. Relationship Name CallCenter Relationship Type Lookup Refers To CallCenter
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the transfer destination record that's marked as a favorite.
OwnerId	Type reference

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The unique ID of the user who owns this object. This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
TransferDestination	Type string
	Properties Create, Filter, Group, Sort, Update
	Description The unique ID of the transfer destination that's marked as a favorite. This is an external ID.

CallCtrAgentFavTrfrDestShare

Represents a sharing entry on a favorite transfer destination in the Omni-Channel softphone for voice call transfers. This object is available in API version 55.0 and later.

You can only create, edit, and delete sharing entries for standard objects whose `RowCause` field is set to `Manual`. Sharing entries for standard objects with different `RowCause` values are created as a result of your Salesforce org's sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren't stored at all.



Note: While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it's possible that we'll stop storing certain share records to improve performance. As a best practice, don't create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
AccessLevel	Type picklist

Field	Details
	Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The level of access the User or Group has to the transfer destination that's marked as a favorite. Possible values are: • All — Owner • Edit — Read/Write • Read — Read Only
ParentId	Type reference Properties Create, Filter, Group, Sort Description The unique ID of the parent object. This field is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To CallCtrAgentFavTrfrDest
RowCause	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is Manual. If no value is specified, the field defaults to Manual. All other RowCause values are read-only. After the sharing entry is created, this field can't be edited. Possible values are: • CompliantDataSharing — Compliant Data Sharing • GuestParentImplicit — Associated guest user sharing • GuestPersonImplicit — Associated Guest User Sharing • GuestRule — Guest User Sharing Rule • ImplicitChild — Account Sharing • ImplicitParent — Associated record owner or sharing • ImplicitPerson — Person Contact • LearningAssignment — Learning Assignment Share

Field	Details
	• <code>LearningAssignmentImplicit</code> — Learning Assignment Implicit Share • <code>LearningItemAssignment</code> — Learning Item Assignment Share • <code>Manual</code> — Manual Sharing • <code>MfgTargetShare</code> — Manufacturing Target Sharing Rule • <code>Owner</code> • <code>Rule</code> — Sharing Rule • <code>SharingRecordCollection</code> — Record Collection • <code>SurveyShare</code> — Survey Sharing Rule • <code>Team</code> — Sales Team • <code>Territory</code> — Territory Assignment Rule • <code>Territory2AssociationManual</code> — Territory Manual • <code>Territory2Forecast</code> — Territory assignment for forecasting and reporting • <code>TerritoryManual</code> — Territory Manual • <code>TerritoryRule</code> — Territory Sharing Rule
<code>UserOrGroupId</code>	Type reference Properties Create, Filter, Group, Sort Description The unique ID of the User or Group that has been given access to the favorite transfer destination. This field is a polymorphic relationship field. Relationship Name UserOrGroup Relationship Type Lookup Refers To Group, User

CallDisposition

Represents a call result value that sales reps select when logging a call. This object is available in API version 47.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

As of Spring '20 and later, only your Salesforce org's internal users can access this object.

Fields

Field	Details
Disposition	Type string Properties Filter, Group, idLookup, Sort Description The result of a phone call, such as whether a call was connected or the rep left a voicemail.
DispositionCategoryId	Type reference Properties Filter, Group, Sort Description The related call outcome that is used in reports and branching criteria for cadences.

CallDispositionCategory

Represents the call outcome of a phone call that is used in reports and branching criteria for cadences. This object is available in API version 47.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

As of Spring '20 and later, only your Salesforce org's internal users can access this object.

Fields

Field	Details
Category	Type string Properties Filter, Group, idLookup, Sort

Field	Details
	Description The name of the call outcome.
DeveloperName	Type string Properties Filter, Group, Sort Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language of the call category. Possible values are: • da—Danish • de—German • en_US—English • es—Spanish • es_MX—Spanish (Mexico) • fi—Finnish • fr—French • it—Italian • ja—Japanese • ko—Korean • nl_NL—Dutch • no—Norwegian • pt_BR—Portuguese (Brazil) • ru—Russian • sv—Swedish • th—Thai

Field	Details
	- zh_CN—Chinese (Simplified) - zh_TW—Chinese (Traditional)
MasterLabel	Type string Properties Filter, Group, Sort Description The static name of the call outcome.

CallTemplate

Represents a call script for users to read when making calls.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
Description	Type string Properties Filter, Group, Nillable, Sort Description The description of the call script.
HtmlBody	Type textarea Properties Nillable Description The body content of the call script.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The time stamp that indicates when the current user last viewed a record that is related to this CallTemplate.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The time stamp that indicates when the current user last viewed this CallTemplate. If this value is null, this record might have been only referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the call script.
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the user who owns the call script.
TemplateType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of call template. Possible values are: • Text
TotalCalls	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The total number of calls that use the CallTemplate.
TotalCallsCallBackLater	Type int Properties Filter, Group, Nillable, Sort Description The total Call Back Later call results that use the CallTemplate.
TotalCallsLeftVoicemail	Type int Properties Filter, Group, Nillable, Sort Description The total Left Voicemail call results that use the CallTemplate.
TotalCallsMeaningfulConnect	Type int Properties Filter, Group, Nillable, Sort Description The total Meaningful Connect call results that use the CallTemplate.
TotalCallsNotInterested	Type int Properties Filter, Group, Nillable, Sort Description The total Not Interested call results that use the CallTemplate.
TotalCallsUncategorized	Type int Properties Filter, Group, Nillable, Sort Description The total uncategorized call results that use the CallTemplate.
TotalCallsUnqualified	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The total Unqualified call results that use the CallTemplate.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[CallTemplateChangeEvent](#) (API version 48.0)

Change events are available for the object.

Campaign

Represents and tracks a marketing campaign, such as a direct mail promotion, webinar, or trade show.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
<code>ActualCost</code>	Type currency Properties Filter, Nillable, Sort Description The amount of money spent to run the campaign. Label is Actual Cost in Campaign.
<code>AmountAllOpportunities</code>	Type currency Properties Filter, Sort Description Amount of money in all opportunities associated with the campaign, including closed/won opportunities. Label is Value Opportunities in Campaign.

Field	Details
AmountWonOpportunities	Type currency Properties Filter, Sort Description Amount of money in closed or won opportunities associated with the campaign. Label is Value Won Opportunities in Campaign.
BriefId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the brief that's associated with the campaign. A brief contains additional context about the goals and audience for the campaign. The label is Brief. Relationship Name Brief Relationship Type Lookup Refers To Record
BudgetedCost	Type currency Properties Filter, Nillable, Sort Description Amount of money budgeted for the campaign. Label is Budgeted Cost in Campaign.
CampaignImageId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the campaign image. Available in API version 42.0 and later. Only available to orgs with Partner Community licenses and Digital Experience enabled or orgs that have installed the Direct Marketing Managed package.
CampaignMemberRecordTypeId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description The record type ID for CampaignMember records associated with the campaign. This is a relationship field. Relationship Name CampaignMemberRecordType Relationship Type Lookup Refers To RecordType
CampaignStage	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description This field is available with Marketing Cloud Growth and Advanced editions. The lifecycle stage of the campaign based on the status of all of its related flows. Possible values are: • In Planning • In Progress • Completed • Error • Canceled • Paused
CreatedByID	Type reference Properties Filter, Group, Sort Description ID of the user who created the campaign. This is a relationship field. Relationship Name Creator Relationship Type Lookup Refers To User
CurrencyIsoCode	Type picklist

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description Available only for organizations with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
Description	Type textarea
	Properties Nillable
	Description Description of the campaign. Limit: 32 KB. Only the first 255 characters display in reports.
EndDate	Type date
	Properties Filter, Group, Nillable, Sort
	Description Ending date for the campaign. Responses received after this date are still counted.
ExpectedResponse	Type percent
	Properties Filter, Nillable, Sort
	Description Percentage of responses you expect to receive for the campaign.
ExpectedRevenue	Type currency
	Properties Filter, Nillable, Sort
	Description Amount of money you expect to generate from the campaign.
HierarchyActualCost	Type currency
	Properties Filter, Nillable, Sort
	Description Calculated field for the total amount of money spent to run the campaigns in a campaign hierarchy. Label is Total Actual Cost in Hierarchy.

Field	Details
HierarchyAmountAllOpportunities	Type currency Properties Filter, Sort Description Amount of money in all opportunities associated with the campaign in a campaign hierarchy, including closed/won opportunities. Label is Value Opportunities in Hierarchy.
HierarchyAmountWonOpportunities	Type currency Properties Filter, Sort Description The amount of money in closed or won opportunities associated with the campaign in a campaign hierarchy. Label is Value Won Opportunities in Hierarchy.
HierarchyBudgetedCost	Type currency Properties Filter, Nillable, Sort Description Calculated field for the total amount of money budgeted for the campaigns in a campaign hierarchy. Label is Total Budgeted Cost in Hierarchy.
HierarchyExpectedRevenue	Type currency Properties Filter, Nillable, Sort Description Calculated field for the total amount of money you expect to generate from the campaign in a campaign hierarchy. Label is Total Expected Revenue in Hierarchy.
HierarchyNumberOfContacts	Type int Properties Filter Description Calculated field for the number of contacts associated with the campaign hierarchy. Label is Total Contacts in Hierarchy.
HierarchyNumberOfConvertedLeads	Type currency

Field	Details
	Properties Filter, Nillable, Sort Description Calculated field for the number of converted leads from the campaign in a campaign hierarchy. Label is Converted Leads in Hierarchy.
HierarchyNumberOfLeads	Type currency Properties Filter, Nillable, Sort Description Calculated field for the number of leads from the campaign in a campaign hierarchy. Label is Leads in Hierarchy.
HierarchyNumberOfOpportunities	Type currency Properties Filter, Nillable, Sort Description Calculated field for the number of opportunities related to the campaign in a campaign hierarchy. Label is Opportunities in Hierarchy.
HierarchyNumberOfResponses	Type currency Properties Filter, Nillable, Sort Description Number of contacts and unconverted leads with a Member Status equivalent to “Responded” for the campaign in a campaign hierarchy. Label is Responses in Hierarchy.
HierarchyNumberWonOpportunities	Type int Properties Filter, Group, Sort Description The number of closed or won opportunities associated with the campaign. Label is Won Opportunities in Hierarchy.
HierarchyNumberSent	Type double Properties Filter, Nillable, Sort

Field	Details
	Description Calculated field for the total number of individuals targeted by the campaign in a campaign hierarchy. For example, the number of email messages sent. The label is Num Sent in Hierarchy.
HierarchyTotalEmailsDelivered	Type int Properties Filter Description Calculated field for emails delivered related to the campaign in a campaign hierarchy. Label is Total Emails Delivered in Hierarchy. This field is available with Marketing Cloud Account Engagement.
HierarchyTotalFormSubmissions	Type int Properties Filter Description Calculated field for form submissions related to the campaign in a campaign hierarchy. Label is Total Form Submissions in Hierarchy. This field is available with Marketing Cloud Account Engagement.
HierarchyTotalFormViews	Type int Properties Filter Description Calculated field for form views related to the campaign in a campaign hierarchy. Label is Total Form Views in Hierarchy. This field is available with Marketing Cloud Account Engagement.
HierarchyTotalLandingPageFormSubmissions	Type int Properties Filter Description Calculated field for form submissions from a landing page related to the campaign in a campaign hierarchy. Label is Total Landing Page Form Submissions in Hierarchy. This field is available with Marketing Cloud Account Engagement.
HierarchyTotalLandingPageViews	Type int

Field	Details
	Properties Filter Description Calculated field for landing page views related to the campaign in a campaign hierarchy. Label is Total Landing Page Views in Hierarchy. This field is available with Marketing Cloud Account Engagement.
HierarchyUniqueEmailOpens	Type int Properties Filter Description Calculated field for email opens related to the campaign in a campaign hierarchy. Excludes repeat opens. Label is Unique Email Opens in Hierarchy. This field is available with Marketing Cloud Account Engagement.
HierarchyUniqueEmailTrackedLinkClicks	Type int Properties Filter Description Calculated field for unique email link clicks related to the campaign in a campaign hierarchy. Excludes repeat clicks. Label is Unique Email Clicks in Hierarchy. This field is available with Marketing Cloud Account Engagement.
HierarchyUniqueMarketingLinkClicks	Type int Properties Filter Description Calculated field for unique marketing link clicks related to the campaign in a campaign hierarchy. Excludes repeat clicks. Label is Unique Marketing Link Clicks in Hierarchy. This field is available with Marketing Cloud Account Engagement.
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this campaign is active (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>. The label is Active.

Field	Details
LastActivityDate	Type date Properties Filter, Group, Nillable, Sort Description Value is one of the following, whichever is the most recent: • The due date of the most recent event logged against the record. • The due date of the most recently closed task associated with the record.
LastModifiedById	Type reference Properties Filter, Group, Sort Description ID of the user who last updated the campaign. This is a relationship field. Relationship Name Last Modified Relationship Type Lookup Refers To User
LastReferencedDate	Type datetime Properties Filter, Nillable, Sort, Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type datetime Properties Filter, Nillable, Sort, Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.

Field	Details
Name	Type string Properties Filter, Group, idLookup, Sort Description Required. Name of the campaign. Limit: is 80 characters.
NumberOfContacts	Type int Properties Filter, Group, Sort Description Number of contacts associated with the campaign. Label is Total Contacts.
NumberOfConvertedLeads	Type int Properties Filter, Group, Sort Description Number of leads that were converted to an account and contact due to the marketing efforts in the campaign. Label is Converted Leads.
NumberOfLeads	Type int Properties Filter, Group, Sort Description The number of leads associated with the campaign. Label is Leads in Campaign.
NumberOfOpportunities	Type int Properties Filter, Group, Sort Description The number of opportunities associated with the campaign. Label is Opportunities in Campaign.
NumberOfResponses	Type int Properties Filter, Group, Sort

Field	Details
	Description The number of contacts and unconverted leads with a Member Status equivalent to “Responded” for the campaign. Label is Responses in Campaign.
NumberOfWonOpportunities	Type int Properties Filter, Group, Sort Description The number of closed or won opportunities associated with the campaign. Label is Won Opportunities in Campaign.
NumberSent	Type double Properties Filter, Nillable, Sort Description The number of individuals targeted by the campaign. For example, the number of emails sent. Label is Num Sent.
OwnerId	Type reference Properties Filter, Group, Sort Description ID of the user who owns this campaign. Default value is the user logging in to the API to perform the create. This is a relationship field. Relationship Name Owner Relationship Type Lookup Refers To User
ParentCampaign	Type reference Properties Create, Filter, Nillable, Update Description The campaign above the selected campaign in the campaign hierarchy.

Field	Details
ParentId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the parent Campaign record, if any. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To Campaign
RecordTypeId	Type reference Properties Create, Filter, Nillable, Update Description ID of the record type assigned to this object.
StartDate	Type date Properties Filter, Group, Nillable, Sort Description Starting date for the campaign.
Status	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Sort Description Status of the campaign, for example, Planned, In Progress. Limit: 40 characters.
TenantId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description ID of the associated Marketing Cloud Account Engagement business unit. Read-only. Available with Marketing Cloud Account Engagement in API version 51.0 and later. This is a relationship field. Relationship Name Business Unit Relationship Type Lookup Refers To PardotTenant
TotalAmountAllOpportunities	Type currency Properties Filter Description Calculated field for total amount of all opportunities associated with the campaign hierarchy, including closed/won opportunities. Label is Total Value Opportunities in Hierarchy.
TotalAmountAllWonOpportunities	Type currency Properties Filter Description Calculated field for amount of all closed/won opportunities associated with the campaign hierarchy. Label is Total Value Won Opportunities in Hierarchy.
TotalEmailsDelivered	Type int Properties Filter Description Calculated field for emails delivered related to the campaign. Label is Total Emails Delivered in Campaign. This field is available with Marketing Cloud Account Engagement.
TotalFormSubmissions	Type int Properties Filter Description Calculated field for form submissions related to the campaign. Label is Total Form Submissions in Campaign. This field is available with Marketing Cloud Account Engagement.

Field	Details
TotalFormViews	Type int Properties Filter Description Calculated field for form views related to the campaign. Label is Total Form Views in Campaign. This field is available with Marketing Cloud Account Engagement.
TotalLandingPageFormSubmissions	Type int Properties Filter Description Calculated field for form submissions from a landing page related to the campaign. Label is Total Landing Page Form Submissions in Campaign. This field is available with Marketing Cloud Account Engagement.
TotalLandingPageViews	Type int Properties Filter Description Calculated field for landing page views related to the campaign. Label is Total Landing Page Views in Campaign. This field is available with Marketing Cloud Account Engagement.
TotalNumberOfLeads	Type int Properties Filter Description Calculated field for total number of leads associated with the campaign hierarchy. This number also includes converted leads. Label is Total Leads in Hierarchy.
TotalNumberOfOpportunities	Type int Properties Filter Description Calculated field for the total number of opportunities associated with the campaign hierarchy. Label is Total Opportunities in Hierarchy.

Field	Details
TotalNumberOfResponses	Type int Properties Filter Description Calculated field for number of contacts and unconverted leads that have a <code>Member Status</code> equivalent to "Responded" for the campaign hierarchy. Label is Total Responses in Hierarchy.
TotalNumberOfWonOpportunities	Type int Properties Filter Description Calculated field for the total number of won opportunities associated with the campaign hierarchy. Label is Total Won Opportunities in Hierarchy.
Type	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Sort Description Type of campaign, for example, Direct Mail or Referral Program. Limit: 40 characters.
UniqueEmailOpens	Type int Properties Filter Description Calculated field for email opens related to the campaign. Excludes repeat opens. Label is Unique Email Opens in Campaign. This field is available with Marketing Cloud Account Engagement.
UniqueEmailTrackedLinkClicks	Type int Properties Filter Description Calculated field for unique email link clicks related to the campaign. Excludes repeat clicks. Label is Unique Email Clicks in Campaign. This field is available with Marketing Cloud Account Engagement.

Field	Details
UniqueMarketingLinkClicks	Type int Properties Filter Description Calculated field for unique marketing link clicks related to the campaign. Excludes repeat clicks. Label is Unique Marketing Link Clicks in Campaign. This field is available with Marketing Cloud Account Engagement.

Usage

Client applications can create, update, delete, and query Attachment records associated with a campaign via the API.

The Campaign object is defined only for those organizations that have the marketing feature enabled and valid marketing licenses. In addition, it is accessible only to those users that are enabled as marketing users. If the organization does not have the marketing feature or valid marketing licenses, this object does not appear in the `describeGlobal()` call, and you can't use `describeObjects()` or `query()` with the Campaign object.



Note: The main constituent of a campaign is a CampaignMember. You will commonly need to update campaigns with CampaignMember.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

CampaignChangeEvent (API version 44.0)

Change events are available for the object.

CampaignFeed (API version 18.0)

Feed tracking is available for the object.

CampaignHistory (API version 40.0)

History is available for tracked fields of the object.

CampaignOwnerSharingRule

Sharing rules are available for the object.

CampaignShare

Sharing is available for the object.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

CampaignInfluence

Represents the association between a campaign and an opportunity in Customizable Campaign Influence. This object is available in API version 37.0 and later.



Note: This information applies only to Customizable Campaign Influence and not to [Campaign Influence 1.0](#).

To ingest this object in Data Cloud, set up the Data Cloud Salesforce Connector permission set. See [Enable Object and Field Permissions for CRM Connections](#).

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, Customizable Campaign Influence must be enabled. Customer Portal users can't access this object.

Fields

Field Name	Details
CampaignId	Type reference Properties Create, Filter, Group, Sort Description The ID of the campaign that's related to the opportunity.
CampaignMemberId	Type reference Properties Create, Filter, Group, Sort Description The ID of the campaign member related to the opportunity. Not available in the UI.
ContactId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the contact on the associated opportunity.
Influence	Type percent Properties Create, Defaulted on create, Filter, Nillable, Sort, Update

Field Name	Details
	Description The percentage of the Amount field for the related opportunity that's attributed to the campaign.
ModelId	Type reference Properties Create, Filter, Group, Sort Description The ID of the campaign influence model that's related to the record.
OpportunityContactRoleId	Type reference Properties Create, Filter, Group, Sort Description The opportunity contact role ID of the related opportunity. Not available in the UI.
OpportunityId	Type reference Properties Create, Filter, Group, Sort Description The ID of the related opportunity.
RevenueShare	Type currency Properties Filter, Nillable, Sort Description The amount of revenue from the related opportunity attributed to the campaign.

Usage

Use this object to create campaign influence records for your custom campaign influence models. Don't create campaign influence records for the Primary Campaign Source model. Records added to the Primary Campaign Source model via the API are deleted when the model is recalculated.

CampaignInfluenceModel

This read-only object represents a campaign influence model in Customizable Campaign Influence. Use campaign influence models to group `CampaignInfluence` records created by a specific set of triggers and workflows that you define. The Primary Campaign Source influence model is the default model. This object is available in API version 37.0 and later.

 **Note:** This information applies only to [Customizable Campaign Influence](#) and not to [Campaign Influence 1.0](#).

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

To access this object, Customizable Campaign Influence must be enabled. Customer Portal users can't access this object.

Fields

Field Name	Details
<code>DeveloperName</code>	Type string Properties Filter, Group, Sort Description The API name of the influence model. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
<code>IsActive</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the model is active. Active models can generate campaign influence records. Deactivating a model deletes its campaign influence records. Custom models are always active and this field is ignored.

Field Name	Details
IsDefaultModel	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the model is the default model (<code>true</code>) or not (<code>false</code>). CampaignInfluence records associated with the default model appear in 3 locations. - The Campaign Influence related list on opportunities - The Influenced Opportunities related list on campaigns - The Campaign Statistics section on campaigns The value of <code>IsDefaultModel</code> can only be true for 1 model at a time.
IsModelLocked	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the model is locked (<code>true</code>) or not (<code>false</code>). Records for locked models can only be added, updated, or deleted via the API.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language of the influence model.
MasterLabel	Type string Properties Filter, Group, Sort Description The label for the influence model.
ModelDescription	Type string Properties Filter, Group, Nillable, Sort Description The description of the influence model.

Field Name	Details
ModelType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates whether the model is the Primary Campaign Source influence model, or a custom model. These values are the allowed. • 1: Primary Campaign Source Model • 2: Custom Model • 3: First Touch Model • 4: Last Touch Model • 5: Even Distribution Model • 6: Data-Driven Model
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, NamespacePrefix is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, NamespacePrefix is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
RecordPreference	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The value of this field determines when to create campaign influence records. • AllRecords: Creates records regardless of the revenue attribution percentage.

Field Name	Details
	RecordsWithAttribution: Creates records only when the revenue attribution is greater than 0%.

CampaignMember

The CampaignMember object represents the relationship between a campaign and either a lead or a contact. If the Accounts as Campaign Members setting is enabled in an org, CampaignMember can also represent the relationship between a campaign and an account.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Sort Description ID of the account related to the campaign. This field is available only if the Accounts as Campaign Members setting is enabled in the org. This field is a relationship field. Relationship Name Related Record ID Relationship Type Lookup Refers To Account
CampaignId	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description Required. The ID of the campaign related to the lead or contact. This field is a relationship field. Relationship Name Campaign Relationship Type Lookup Refers To Campaign
City	Type string Properties Filter, Group, Nillable, Sort Description The city for the address of the lead or contact. In orgs with the Accounts as Campaign Members setting enabled, this field can be the city for the account.
CompanyOrAccount	Type string Properties Filter, Group, Nillable, Sort Description The company or account of the lead or contact.
ContactId	Type reference Properties Create, Filter, Group, Nillable, Sort Description Required. The ID of a contact that's related to the campaign. This field is a relationship field. Relationship Name Contact Relationship Type Lookup Refers To Contact
CurrencyIsoCode	Type picklist

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for organizations with the multicurrency feature enabled. This field contains the ISO code for any currency allowed by the organization.
Country	Type string Properties Filter, Group, Nillable, Sort Description The country for the address of the lead or contact. In orgs with the Accounts as Campaign Members setting enabled, this field can be the country for the account.
Description	Type textarea Properties Nillable Description The description of the associated lead or contact. In orgs with the Accounts as Campaign Members setting enabled, this field can be the description of the account.
DoNotCall	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates that the lead or contact doesn't want to be called. In orgs with the Accounts as Campaign Members setting enabled, this field can indicate the account doesn't want to be called.
Email	Type email Properties Filter, Group, Nillable, Sort Description Email address for the lead or contact. In orgs with the Accounts as Campaign Members setting enabled, this field can be the email address for the account.
Fax	Type phone

Field	Details
	Properties Filter, Group, Nillable, Sort Description Fax number for the lead or contact. In orgs with the Accounts as Campaign Members setting enabled, this field can be the fax number for the account.
FirstName	Type string Properties Filter, Group, Nillable, Sort Description The first name of the lead or contact.
FirstRespondedDate	Type date Properties Filter, Group, Nillable, Sort Description This field indicates the date that the campaign member received a status of Responded.
HasOptedOutOfEmail	Type boolean Properties Defaulted on create, Filter, Group, Sort Description This field indicates the email opt-out preference for the lead or contact. A value of <code>false</code> indicates that the lead or contact is opted in to emails. A value of <code>true</code> indicates that they're opted out. In orgs with the Accounts as Campaign Members setting enabled, this field can be the opt-out preference for the account email address.
HasOptedOutOfFax	Type boolean Properties Defaulted on create, Filter, Group, Sort Description This field indicates the fax opt-out preferences for the lead or contact. A value of <code>false</code> indicates that the lead or contact is opted in to receiving faxes. A value of <code>true</code> indicates that they're opted out. In orgs with the Accounts as Campaign Members setting enabled, this field can indicate the account has opted out of faxes.
HasResponded	Type boolean

Field	Details
	Properties Defaulted on create, Filter, Group, Sort Description This field indicates whether the campaign member has responded to the campaign (<code>true</code>) or not (<code>false</code>). Label is Responded.
LastName	Type string Properties Filter, Group, Nillable, Sort Description The last name of the lead or contact. The limit is 80 characters.
LeadId	Type reference Properties Create, Filter, Group, Nillable, Sort Description Required. The ID of a lead that's related to the campaign. This field is a relationship field. Relationship Name Lead Relationship Type Lookup Refers To Lead
LeadOrContactId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of a lead or contact that's related to the campaign. In orgs with the Accounts as Campaign Members setting enabled, this field also accepts an account ID.
LeadOrContactOwnerId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description The ID of the owner of the associated lead or contact owner. In orgs with the Accounts as Campaign Members setting enabled, this field can be the owner of the account. This field is a polymorphic relationship field. Relationship Name LeadOrContactOwner Relationship Type Lookup Refers To Group, User
LeadSource	Type picklist Properties Filter, Group, Nillable, Sort Description The source where the lead was obtained.
MobilePhone	Type phone Properties Filter, Group, Nillable, Sort Description The mobile phone number of the lead or contact. In orgs with the Accounts as Campaign Members setting enabled, this field can be the mobile phone number for the account.
Name	Type string Properties Filter, Group, Nillable, Sort Description The first and last name of the lead or contact that's related to the campaign member.
Phone	Type phone Properties Filter, Group, Nillable, Sort Description The phone number of the lead or contact. In orgs with the Accounts as Campaign Members setting enabled, this field can be the phone number for the account.

Field	Details
PostalCode	Type string Properties Filter, Group, Nillable, Sort Description The postal code for the lead or contact. In orgs with the Accounts as Campaign Members setting enabled, this field can be the postal code for the account.
RecordTypeId	Type reference Properties Create, Filter, Nillable, Update Description ID of the record type assigned to this object. To change the record type, modify the CampaignMemberRecordTypeId field on the associated Campaign.
Salutation	Type picklist Properties Filter, Group, Nillable, Sort Description Salutation for the lead or contact.
State	Type string Properties Filter, Group, Nillable, Sort Description The state for the address of the lead or contact. The limit is 80 characters. In orgs with the Accounts as Campaign Members setting enabled, this field can be the state of the account address.
Status	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Controls the HasResponded flag on this object. You can't directly set the HasResponded flag, as it's read-only. You can set it indirectly by setting this field in a create or update call. Each predefined value implies a HasResponded flag value. Each time you update this field, you implicitly update the HasResponded flag. In the Salesforce user interface, Marketing users can define valid status values for the Status picklist. They

Field	Details
	can choose one status as the default status. For each <code>Status</code> field value, they can also select which values to count as “Responded,” meaning that the <code>HasResponded</code> flag is set to <code>true</code> for those values. The limit is 40 characters. When you create or update campaign members, use the text value for <code>Status</code> instead of the ID from the <code>CampaignMemberStatus</code> object.
Street	Type string Properties Filter, Group, Nillable, Sort Description The street for the address of the lead or contact. In orgs with the Accounts as Campaign Members setting enabled, this field can be the street of the account address.
Title	Type string Properties Filter, Group, Nillable, Sort Description Title for the lead or contact.
Type	Type string Properties Filter, Group, Nillable, Sort Description Indicates if the campaign member is a lead or a contact. In orgs with the Accounts as Campaign Members setting enabled, this field can indicate an account.



Note: If you’re importing CampaignMember data into Salesforce and want to set the value for an audit field, such as `CreatedDate`, contact Salesforce. Audit fields are automatically updated during API operations unless you request to set these fields yourself.

Usage

Each record has a unique ID, and must contain either a `ContactId` or a `LeadId`, but can't contain both. Any attempt to create a single record with both results in a successful insert but only the `ContactId` is inserted. However, you can create two separate records on a Campaign—one for the Lead and one for the Contact.

In orgs with the Accounts as Campaign Members setting enabled, the unique ID can be an `AccountId`.

Standard fields from a lead or contact are associated with the CampaignMember object, but you can't query them directly. To include a `Phone` in your query, for example, query the field from the Lead object.

```
SELECT Id, (SELECT Phone FROM Lead)
FROM CampaignMember
```

This object is defined only for orgs that have the marketing feature and valid marketing licenses. If your org doesn't have the marketing feature or valid marketing licenses, this object doesn't appear in the `describeGlobal()` call, and you can't use `describeSObjects()` or `query()` with this object.



Note: If you want to track lead-based campaign members you convert to contacts, provide both a `ContactId` and a `LeadId`. Otherwise, only use one ID type.

To issue `create()` requests to the API, your account only requires read access to campaigns.

If the record doesn't exist for the specified `ContactId` or `LeadId`, then a new record is created. If the record exists, an error is returned and no update is made. To update an existing record, specify the ID of the CampaignMember record to update.

To delete a record, specify the ID of the CampaignMember record.

When creating or updating records, the `Status` field value specified in the call is verified as a valid status for the given Campaign:

- If the specified `Status` value is a valid status, the value is updated, and the `HasResponded` field is updated to either `true` or `false`, depending on the `Status` value association with `HasResponded`.
- If the specified `Status` value isn't a valid status, the API assigns the default status to the `Status` field and updates the `HasResponded` field with the associated value. However, if the given Campaign doesn't have a default status, the API assigns the value specified in the call to the `Status` field, and the `HasResponded` field is set to `false`.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

CampaignMemberChangeEvent (API version 46.0)

Change events are available for the object.

SEE ALSO:

[Campaign](#)

[CampaignMemberStatus](#)

CampaignMemberStatus

One or more member status values defined for a campaign.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Customer Portal users can't access this object.

You can't delete a CampaignMemberStatus if that status is designated as the default status or if the status is currently used in a Campaign.

Fields

Field	Details
CampaignId	Type reference Properties Filter, Group, Sort Description ID of the campaign associated with this member status.
HasResponded	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this status is equivalent to "Responded" (<code>true</code>) or not (<code>false</code>). Beginning with API version 39.0, at least one CampaignMemberStatus on each campaign must have a hasResponded value of <code>true</code>.
IsDefault	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this status is the default status (<code>true</code>) or not (<code>false</code>). Beginning with API version 39.0, there must be a default CampaignMemberStatus defined for every campaign.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
Label	Type string Properties Filter, Sort Description Label for the status in the picklist. Limited to 765 characters.

Field	Details
SortOrder	Type int Properties Filter, Group, Sort, Update Description Unique number order where this campaign member status appears in the picklist.

Usage

Use this object to create picklist items for the member status in a campaign.

This object is defined only for those organizations that have the marketing feature and valid marketing licenses. In addition, the object is accessible only to those users that are enabled as marketing users. If the organization does not have the marketing feature or valid marketing licenses, this object does not appear in a `describeGlobal()` call, and you can't use `describeObjects()` or `query()` with the CampaignMember object.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

CampaignMemberStatusChangeEvent (API version 46.0)

Change events are available for the object.

SEE ALSO:

[Campaign](#)

[CampaignMember](#)

CampaignOwnerSharingRule

Represents the rules for sharing a campaign with User records other than the owner or anyone above the owner in the role hierarchy.



Note: To enable access to this object for your org, contact Salesforce customer support. However, we recommend that you instead use Metadata API to programmatically update owner sharing rules because it triggers automatic sharing rule recalculation. The [SharingRules](#) Metadata API type is enabled for all orgs.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
CampaignAccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A value that represents the type of access granted to the target Group, or UserRole. The possible values are: • Read • Edit • All
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description A description of the sharing rule. Maximum size is 1000 characters. This field is available in API version 29.0 and later.
DeveloperName	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Corresponds to Rule Name in the user interface. This field is available in API version 24.0 and later.  Note: When creating large sets of data, always specify a unique DeveloperName for each record. If no DeveloperName is specified, performance may slow while Salesforce generates one for each record.
GroupId	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description The ID representing the source group. A Campaign owned by a User in the source Group triggers the rule to give access.
Name	Type string Properties Create, Filter, Group, Sort, Update Description Label of the sharing rule as it appears in the user interface. Limited to 80 characters. Corresponds to Label on the user interface.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the User or Group being granted access.

Usage

Use this object to manage the sharing rules for campaigns.

SEE ALSO:

[Metadata API Developer Guide: SharingRules](#)

CampaignShare

Represents a sharing entry on a Campaign.

You can only create, edit, and delete sharing entries for standard objects whose `RowCause` field is set to `Manual`. Sharing entries for standard objects with different `RowCause` values are created as a result of your Salesforce org's sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren't stored at all.

 **Note:** While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it's possible that we'll stop storing certain share records to improve performance. As a best practice, don't create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, only users with access to the Campaign object can access this object.

Fields

The properties available for some fields depend on the default organization-wide sharing settings. The properties listed are true for the default settings of such fields.

Field	Details
CampaignId	Type reference Properties Create, Filter, Group, Sort Description ID of the Campaign associated with this sharing entry. This field can't be updated. This is a relationship field. Relationship Name Campaign Relationship Type Lookup Refers To Campaign
CampaignAccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Level of access that the User or Group has to the Campaign. The possible values are: • Read • Edit • All (This value is not valid for creating or updating records.) This field must be set to an access level that is higher than the organization's default access level for Campaign.
RowCause	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is <code>Manual</code>. If no value is specified, the field defaults to <code>Manual</code>. All other <code>RowCause</code> values are read-only. After the sharing entry is created, this field can't be edited. Valid values: <code>Rule</code>—The User or Group has access via a Campaign sharing rule. <code>GuestRule</code>—The User or Group has access via a Campaign guest user sharing rule. <code>Manual</code>—The User or Group has access because a User with "All" access manually shared the Campaign with them. <code>Owner</code>—The User is the owner of the Campaign. <code>IpuImplicit</code>—The User has access to records owned by high-volume Experience Cloud site users via a share group. <code>ARImplicit</code>—The User, who belongs to a partner or customer account, has access to the Campaign via an account relationship data sharing rule.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the User or Group that has been given access to the Campaign. This field can't be updated. This is a polymorphic relationship field. Relationship Name UserOrGroup Relationship Type Lookup Refers To Group, User

Usage

This object allows you to determine which users and groups can view or edit Campaign records owned by other users.

CampaignTag

Associates a word or short phrase with a Campaign.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
ItemId	Type reference Properties Create, Filter Description ID of the tagged item.
Name	Type string Properties Create, Filter Description Name of the tag. If this value does not already exist, a new TagDefinition is created and becomes the parent of this Tag object. Otherwise, a TagDefinition with the same name becomes the parent of this Tag object. Parent relationships are created automatically.
TagDefinitionId	Type reference Properties Filter Description ID of the parent TagDefinition object that owns the tag.
Type	Type picklist Properties Create, Filter, Restricted picklist Description Defines the visibility of a tag. Valid values: • <code>Public</code>—The tag can be viewed and manipulated by all users in an organization. • <code>Personal</code>—The tag can be viewed or manipulated only by a user with a matching <code>OwnerId</code>.

Usage

CampaignTag stores the relationship between its parent TagDefinition and the Campaign being tagged. Tag objects act as metadata, allowing users to describe and organize their data.

When a tag is deleted, its parent TagDefinition will also be deleted if the name is not being used; otherwise, the parent remains. Deleting a TagDefinition sends it to the Recycle Bin, along with any associated tag entries.

CardPaymentMethod

Represents a credit card or debit card payment method, which implements the PaymentMethod object. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access Salesforce Payments objects with the API, your org must have one or more of these licenses: Salesforce Payments, Salesforce Order Management, B2B Commerce, or D2C Commerce. Salesforce Payments objects are available only in Lightning Experience.

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Customer account for the payment method. This field is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
AuditEmail	Type email Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description Email address of the card owner where audit information about payments gets sent. This field is available in API v49.0 and later. It doesn't appear in the UI by default for orgs that upgraded from v48.0. Users must add it to the CardPaymentMethod page layout on their own.
AutoCardType	Type string Properties Create, Filter, Group, Nillable, Sort Description Card network type, derived from the card number.
CardBin	Type int Properties Create, Filter, Group, Nillable, Sort Description First six digits of the card number.
CardCategory	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Defines whether the card is a credit card or debit card. Possible values are: • CreditCard • DebitCard
CardHolderFirstName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description First name of the cardholder.
CardHolderLastName	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description Last name of the cardholder.
CardHolderName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Full name of the cardholder.
CardLastFour	Type int Properties Create, Filter, Group, Nillable, Sort Description Last four digits of the credit card or debit card.
CardPaymentMethodNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description System-defined unique ID for the card payment method.
CardType	Type picklist Properties Create, Filter, Group, Nillable, Sort Description Identifies the credit card type. Possible values are: - American Express - Diners Club - JCB - Maestro - Master Card - Visa
CardTypeCategory	Type picklist

Field	Details
	Properties Filter, Group, Nillable, Restricted picklist, Sort Description Further identifies the credit card. Used for internal reference. Possible values are: - AmericanExpress - DinersClub - Discover - Jcb - Maestro - MasterCard - UnionPay - Visa
Comments	Type textarea Properties Create, Nillable, Update Description Payment admin can add comments to provide additional details about a record. Maximum of 1000 characters.
CompanyName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Company of the cardholder.
DisplayCardNumber	Type string Properties Filter, Group, Nillable, Sort Description Masked digits for the full credit card number except the last four digits.
Email	Type email Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description Email address of the payer.
ExpiryMonth	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The card's expiration month.
ExpiryYear	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The card's expiration year.
GatewayDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date that the payment gateway logs a card activity.
GatewayResultCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The result of the card payment method's interaction with the payment gateway during a transaction request.
GatewayResultCodeDescription	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Additional information about the gateway result code. Descriptions vary between payment gateway providers.
GatewayToken	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Unencrypted unique token ID generated by the payment gateway to represent the card payment method during transactions. <code>GatewayToken</code> is for use with APIs earlier than version 52.0. For version 53.0 and latter, use the <code>GatewayTokenEncrypted</code> field. To secure the token, use the <code>GatewayTokenEncrypted</code> field. An error message appears if you try to record a <code>GatewayToken</code> for a card payment method that already has a <code>GatewayToken</code> or <code>GatewayTokenEncrypted</code> value.
<code>GatewayTokenDetails</code>	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Additional information about the gateway token.
<code>GatewayTokenEncrypted</code>	Type encryptedstring Properties Create, Nillable, Update Description Encrypted unique token ID generated by the payment gateway to represent the card payment method during transactions. Encrypted using Salesforce Classic Encryption. Available in API version 52.0 and later.
<code>InputCardNumber</code>	Type string Properties Create, Filter, Group, Nillable, Sort Description Used by a payer to enter a credit card number when storing an external-type card payment method. After entry, the credit card number isn't saved, so the <code>InputCardNumber</code> value always appears blank. The credit card number appears as a masked value in <code>DisplayCardNumber</code>, which shows only the last four digits.
<code>IpAddress</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description IP address of the card payment method holder.

Field	Details
	This field is available in API version 49.0 and later. It doesn't appear in the UI by default for Salesforce orgs that upgraded from version 48.0. Users must add it to the CardPaymentMethod page layout on their own.
IsAutoPayEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the payment method can be used for recurring payments (<code>True</code>) or not (<code>False</code>). The default value is <code>False</code>. This field is available in API version 55.0 and later. For orgs that upgraded from version 54.0, you must add this field to the Card Payment Method page layout in the UI. It isn't automatically added.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record or list view related to this record, but didn't access it directly.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible the user referenced this record but didn't view it directly.
MacAddress	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description MAC address of the card payment method holder. This field is available in API version 49.0 and later. It doesn't appear in the UI by default for Salesforce orgs that upgraded from version 48.0. Users must add it to the CardPaymentMethod page layout on their own.

Field	Details
NickName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Payer-defined nickname for the card payment method.
PaymentGatewayId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The payment gateway used to create a gateway token. For transactions with a saved payment method in Salesforce, this field stores the payment gateway ID used in the transaction. This field is a relationship field. Relationship Name PaymentGateway Relationship Type Lookup Refers To PaymentGateway
PaymentMethodAddress	Type address Properties Filter, Nillable Description Full address associated with the card payment method.
PaymentMethodCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description City of the address for the payment method.
PaymentMethodCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description Country of the address for the payment method.
PaymentMethodDetails	Type string Properties Create, Filter, Group, Nillable, Sort Description Optional information about the payment method type. This field is available in API version 57.0 and later.
PaymentMethodGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Accuracy level of the geocode for the payment method address. An accuracy level contains information about the location of a latitude and longitude. For more information about geolocation fields, see Geolocation Compound Field . Possible values are: • Address • Block • City • County • ExtendedZip • NearAddress • Neighborhood • State • Street • Unknown • Zip
PaymentMethodLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Latitude of the payment method address. Used with the PaymentMethodLongitude to specify the precise geolocation of the address. For details on geolocation compound fields, see Compound Field Considerations and Limitations .

Field	Details
PaymentMethodLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Latitude of the payment method address. Used with the PaymentMethodLatitude to specify the precise geolocation of the address. For details on geolocation compound fields, see Compound Field Considerations and Limitations.
PaymentMethodPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Postal Code of the address for the payment method.
PaymentMethodState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description State of the address for the payment method.
PaymentMethodStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Street of the address for the payment method.
PaymentMethodSubType	Type string Properties Create, Filter, Group, Nillable, Sort Description A payment method that exists as a subtype of a payment method type. For example, Visa, Mastercard, and American Express exist as subtypes of payment method types such as Apple Pay and Google Pay. This field is available in API version 57.0 and later.
PaymentMethodType	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Payment method used for the transaction. This field is available in API version 57.0 and later. Possible values are: • AfterpayClearpay • AmericanExpress • ApplePay • BanContact • DinersClub • Discover • EPS • GooglePay • Jcb • Klarna • Maestro • MasterCard • Other • PayPal • SepaDebit • UnionPay • Venmo • Visa • iDeal
Phone	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description Phone number of the payer. This field is available in API version 49.0 and later. It doesn't appear in the UI by default for Salesforce orgs that upgraded from version 48.0. Users must add it to the CardPaymentMethod page layout on their own.
ProcessingMode	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort

Field	Details
	Description Defines whether the card payment method is used for transactions made by Salesforce Payments or by an external third-party payment provider. Possible values are: • <code>External</code>—Transactions happened outside of the Salesforce payments platform. • <code>Salesforce</code>—Salesforce made and recorded an external call to the payment platform. This field is available in API version 49.0 and later. It doesn't appear in the UI by default for Salesforce orgs that upgraded from version 48.0. Users must add it to the CardPaymentMethod page layout on their own. You must enter a value for this field.
SavedPaymentMethodId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the saved payment method record. This field is available in API version 60.0 and later. Relationship Name SavedPaymentMethod Relationship Type Lookup Refers To SavedPaymentMethod
SfResultCode	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The results of the card payment method's interaction with the payment gateway. Possible values are: • <code>Decline</code> • <code>Indeterminate</code> • <code>PermanentFail</code> • <code>RequiresReview</code> • <code>Success</code> • <code>SystemError</code> • <code>ValidationError</code>

Field	Details
StartMonth	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The month is activated.
StartYear	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The year the card is activated.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The status of the payment method. Possible values are: • Active • Canceled • InActive

Usage

The following fields drop zeroes that appear at the beginning of the field value, and introduce commas for values with four or more digits:

- CardLastFour
- CardBin
- ExpiryYear

For example, a CardLastFour entered value of 0004112233445566 would appear as 4,112,233,445,566 on the record.

As a workaround, create a String-type custom formula field with the same label as the field that you want to replace, then hide the original field. Here are some examples for replacing CardLastFour, CardBin, and ExpiryYear.

CardLastFour

```
IF(ISBLANK(CardLastFour), NULL, RIGHT("0000" & TEXT(CardLastFour) , 4))
```

CardBin

```
IF(ISBLANK(CardBin), NULL, RIGHT("000000" & TEXT(CardBin) , 6))
```


ExpiryYear

```
IF (ISBLANK (ExpiryYear), NULL, TEXT (ExpiryYear))
```

CartCheckoutSession

Represents a checkout session used in Lightning B2B Commerce checkout. This object is available in API version 48.0 and later.

A checkout session is tied to a single web cart, but there can be multiple checkout sessions for a single cart.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
BackgroundOperationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the in progress background operation.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The currency used for the checkout session. Default value is <code>USD</code> . Possible values are: • <code>USD</code>—U.S. Dollar
IsArchived	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Indicates whether checkout processing is archived (<code>true</code>) or not (<code>false</code>). After a session is archived, it can't be unarchived. Default value is <code>false</code>.
IsError	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the session is in error state (<code>true</code>) or not (<code>false</code>). Default value is <code>false</code>.
IsProcessing	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether checkout processing is in progress (<code>true</code>) or not (<code>false</code>). Default value is <code>false</code>.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the checkout session.
NextState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The next state of the checkout session.
OrderId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of a created order after the checkout session has gone from cart to order.

Field	Details
OrderReferenceNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Unique reference number the shopper can use to refer to the order. In API version 63.0 and later, LWR stores don't populate this field upon checkout. Instead, the <code>InitialOrderReferenceNumber</code> field on the WebCart object is populated.
State	Type string Properties Create, Filter, Group, Sort, Update Description The current state of the checkout session.
WebCartId	Type reference Properties Create, Filter, Group, Sort Description The ID of the cart that is used to create the checkout session.

CartDeliveryGroup

Represents shipping information for the delivery of items in an order against a store built with B2B Commerce or D2C Commerce. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The CartDeliveryGroup object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
CartId	Type reference Properties Create, Filter, Group, Sort Description The ID the WebCart on page 5837 that's associated with this delivery group. This field is a relationship field. Relationship Name Cart Relationship Type Lookup Refers To WebCart
CompanyName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Company name associated with a delivery. This field is available in API version 59.0 and later.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The ISO code for the currency that's specified on the buyer's account. Default value is USD. Possible values are: • USD—U.S. Dollar
DeliverToAddress	Type address Properties Filter, Nillable Description The address to which a buyer order is delivered.
DeliverToCity	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The city to which a buyer order is delivered.
DeliverToCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The country to which a buyer order is delivered.
DeliverToFirstName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The first name of the person set to receive an order. This field is available in API version 57.0 and later.
DeliverToGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The geocode location to which a buyer order is delivered. Possible values are: • Address • Block • City • County • ExtendedZip • NearAddress • Neighborhood • State • Street • Unknown • Zip
DeliverToLastName	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The last name of the person to whom a buyer order is delivered. This field is available in API version 57.0 and later.
DeliverToLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description The latitude of a buyer delivery location.
DeliverToLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description The longitude of a buyer delivery location.
DeliverToName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the person to deliver a buyer order to. This field is set based on the <code>Name</code> field of the <code>ContactPointAddress</code> associated with this delivery group. <code>ContactPointAddress.Name</code> is generated by the system using the first and last names entered by a buyer during checkout.
DeliverToPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The postal code to which to deliver a buyer order.
DeliverToState	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The state to which to deliver a buyer order.
DeliverToStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The street to which to deliver a buyer order.
DeliveryMethodId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID for the delivery method to use to deliver a buyer order. Populated if the selected <code>CartDeliveryGroupMethod</code> only has the <code>ShippingFee</code> populated, but it has reference to an existing <code>DeliveryMethodId</code> which contains the fields <code>Carrier</code> , <code>ClassOfService</code> , and <code>ReferenceNumber</code> . If not, the <code>SelectedDeliveryMethod</code> field is used. This field is a relationship field. This field is deprecated in API version 64.0 and will be removed in API version 66.0. Instead, use the <code>DeliveryMethodId</code> field on the <code>CartDeliveryGroupMethod</code> object. Relationship Name DeliveryMethod Relationship Type Lookup Refers To OrderDeliveryMethod
DesiredDeliveryDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date that a buyer requests to have an order delivered.
GiftMessage	Type textarea Properties Create, Nillable, Update

Field	Details
	Description Personalized gift message for the order. This field is available in API version 64.0 and later.
GiftToName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the recipient for a gift order. This field is available in API version 64.0 and later.
GrandTotalAmount	Type currency Properties Filter, Nillable, Sort Description Sum of all cart items' TotalAmount, or CartDeliveryGroup TotalAmount plus CartDeliveryGroup TotalTaxAmount.
IsDefault	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if the delivery group is the default. This field is available in API version 59.0 and later. The default value is <code>false</code> . B2B and D2C stores create a default delivery group, along with a WebCart, when a customer adds an item to cart and doesn't have an existing cart. The default cart delivery group is needed to complete the checkout flow, and can't be replaced by a non-default cart delivery group. If you customize the standard checkout flow, make sure that you don't delete the default cart delivery group.
IsGift	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if the delivery group is a gift. This field is available in API version 64.0 and later. The default value is <code>false</code> .
Name	Type string

Field	Details
	Properties Create, Filter, Group, idLookup, Sort, Update Description The name of this <code>CartDeliveryGroup</code> record. Name can be up to 255 characters. In API version 62.0 and later, if <code>IsDefault</code> is <code>true</code>, the Name is <code>Shipment1</code>, a localized string. In prior API versions, the Name for a default delivery group was <code>Cart Delivery Group</code>. Due to this change, any queries intended to identify default delivery groups should use the <code>IsDefault</code> rather than Name field.
<code>SelectedDeliveryMethodId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the selected cart delivery group method. Populated if the selected <code>CartDeliveryGroupMethod</code> has the fields <code>Carrier</code>, <code>ClassOfService</code>, <code>ReferenceNumber</code>, and <code>ShippingFee</code>, but the <code>DeliveryMethodId</code> is null. If not, the <code>DeliveryMethodId</code> field is used. This field is available in API version 59.0 or later. This field is a relationship field. Relationship Name SelectedDeliveryMethod Relationship Type Lookup Refers To <code>CartDeliveryGroupMethod</code>
<code>ShipToPhoneNumber</code>	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description Phone number associated with a delivery. This field is available in API version 59.0 and later.
<code>ShippingInstructions</code>	Type textarea Properties Create, Nillable, Update Description Instructions for delivering an order.

Field	Details
TotalAdjustmentAmount	Type currency Properties Filter, Nillable, Sort Description The total amount of all promotional adjustments on the cart delivery group. This field is available in API version 54.0 and later. For product bundles, this includes the aggregate adjustments of all child components.
TotalAdjustmentTaxAmount	Type currency Properties Filter, Nillable, Sort Description The total tax amount for all promotional adjustments on the cart delivery group. This field is available in API version 54.0 and later. For product bundles, this includes the aggregate of the tax amounts for all child components' adjustments.
TotalAmount	Type currency Properties Filter, Nillable, Sort Description The sum of all cart items <code>TotalPrice</code>, or <code>TotalProductAmount</code> plus <code>TotalChargeAmount</code>. For product bundles, this includes the aggregate of all child component prices.
TotalCartItemCount	Type int Properties Filter, Group, Nillable, Sort Description The number of cart items, including their quantities, of the type <code>PRODUCT</code> in the delivery group. For product bundles, this count includes only the parent component. If the total quantity of cart items of type <code>PRODUCT</code> in the delivery group exceeds the system-defined maximum (<code>INT_MAX</code>), this field is set to <code>INT_MAX</code>.
TotalChargeAmount	Type currency

Field	Details
	Properties Filter, Nillable, Sort Description The sum of all the cart items <code>TotalPrice</code> for all cart items of type <code>CHARGE</code>. Cart items can be of type <code>Product</code> or <code>Charge</code>. For product bundles, if a child component includes a cart item of type <code>CHARGE</code>, its amount is aggregated with the parent's cart item's total charge amount.
<code>TotalChargeTaxAmount</code>	Type currency Properties Filter, Nillable, Sort Description The sum of all the cart items <code>TotalTaxAmount</code> for all cart items of type <code>CHARGE</code>. Cart items can be of type <code>Product</code> or <code>Charge</code>. For product bundles, this includes the aggregate of all tax amounts associated with bundle-level charges, including the taxes of individual child products.
<code>TotalProductAmount</code>	Type currency Properties Filter, Nillable, Sort Description The sum of all the cart items <code>TotalPrice</code> for all cart items of type <code>PRODUCT</code>. Cart items can be of type <code>Product</code> or <code>Charge</code>. For product bundles, this includes the aggregate of all child component prices.
<code>TotalProductTaxAmount</code>	Type currency Properties Filter, Nillable, Sort Description The sum of all the cart items <code>TotalTaxAmount</code> for all cart items of type <code>PRODUCT</code>. Cart items can be of type <code>Product</code> or <code>Charge</code>. For product bundles, this includes the aggregate of all child component taxes based on their individual prices.
<code>TotalTaxAmount</code>	Type currency Properties Filter, Nillable, Sort

Field	Details
	Description The sum of all cart items <code>TotalTaxAmount</code> , or the combined value of <code>TotalProductTaxAmount</code> plus <code>TotalChargeTaxAmount</code> . For product bundles, this includes the aggregate of all child component taxes based on their individual prices.

Associated Objects

[CartDeliveryGroupChangeEvent](#) (API version 58.0)

Change events are available for the object.

CartDeliveryGroupMethod

Represents the selected delivery method for a cart delivery group used in Lightning B2B Commerce checkout. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The `CartDeliveryGroupMethod` object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
<code>AdjustedShippingFee</code>	Type currency Properties Filter, Nillable, Sort Description Shipping fee, including <code>TotalAdjustmentAmount</code> , for the delivery method.
<code>Carrier</code>	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The carrier that the buyer chose for their delivery method. Values are defined based on the user's shipping service. This field is available in API version 59.0 or later.
CartCheckoutSessionId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The unique ID used to identify your cart checkout session.
CartDeliveryGroupId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the cart delivery group associated with the checkout session.
ClassOfService	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The carrier class of service that the buyer chose for their delivery method. Values are defined based on the user's shipping service. This field is available in API version 59.0 or later.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The currency used for your shipping fee. Default value is <code>USD</code>. Possible values are: • <code>USD</code>—U.S. Dollar
DeliveryMethodId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the selected order delivery method.

Field	Details
ExternalProvider	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the external shipping method provider. Optional field.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Assign new delivery groups to active delivery methods. The default value is <code>False</code>. This field is available in API version 59.0 or later.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the delivery method.
ProcessTime	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Merchant-specified process time for the delivery method. Process time includes the time between when an order is placed and when the shipment is given to the shipping carrier.
ProcessTimeUnit	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Unit of time used to define <code>ProcessTime</code>. Possible values are: • Days • Hours • Weeks

Field	Details
ProductId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Optional. This product represents a delivery charge order product for a delivery using this delivery method. For example, you could create a product that represents an overnight express charge and assign it to an overnight express delivery method. If your store uses Salesforce Native Shipping, the ProductId is selected from a non-variation product with Shipping in its name. The term Shipping in a product name isn't localized. If no matching product is found, a random non-variation product is used. This field is available in API version 59.0 or later.
ReferenceNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Reference number for an external delivery method. This field is available in API version 59.0 or later.
ShippingFee	Type currency Properties Create, Filter, Sort, Update Description Shipping fee associated with the delivery method. Required field.
TotalAdjustmentAmount	Type currency Properties Filter, Nillable, Sort Description The adjustment amount of a promotion applicable to the delivery method.
TransitTimeMax	Type int Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description Maximum estimate of transit time for the delivery method. Transit time includes the time between when a shipping carrier receives a shipment and when the shipment arrives at the delivery address.
TransitTimeMin	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Minimum estimate of transit time for the delivery method. Transit time includes the time between when a shipping carrier receives a shipment and when the shipment arrives at the delivery address.
TransitTimeUnit	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Unit of time used to define <code>TransitTimeMax</code> and <code>TransitTimeMin</code>. Possible values are: • Days • Hours • Weeks
WebCartId	Type reference Properties Create, Filter, Group, Sort Description The ID of the WebCart associated with the cart delivery group method. Required field.

Usage

Use the `CartDeliveryGroupMethod` object to give commerce buyers the ability to choose a delivery method for a cart delivery group. Shipping integrations populate the delivery options that are available for a cart delivery group.

CartDeliveryGroupMethodAdj

Represents the shipping promotion discount for a shipping method. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The `CartDeliveryGroupMethodAdj` object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
<code>AdjustmentAmount</code>	Type currency Properties Create, Filter, Sort, Update Description Amount subtracted from the price by the shipping promotion discount.
<code>AdjustmentBasisReferenceId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the adjustment basis reference. This is the coupon that causes the adjustment. This field is a relationship field. This field is available in API version 62.0 and later. Relationship Name AdjustmentBasisReference Refers To Coupon
<code>AdjustmentType</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Type of shipping promotion discount. Possible values are: • <code>AdjustmentAmount</code> • <code>AdjustmentPercentage</code> • <code>OverrideAmount</code>

Field	Details
AdjustmentValue	Type double Properties Create, Filter, Sort, Update Description Number representing the value of the price adjustment. For example, if the AdjustmentType is AdjustmentPercentage, a -10 AdjustmentValue means 10 percent off. If the AdjustmentType is AdjustmentAmount, a -10 AdjustmentValue means 10 dollars off.
CartDeliveryGroupMethodId	Type reference Properties Create, Filter, Group, Sort Description ID of the cart delivery group method. This field is a relationship field. Relationship Name CartDeliveryGroupMethod Relationship Type Lookup Refers To CartDeliveryGroupMethod
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Currency ISO code of the cart. Possible values are: • USD—U.S. Dollar The default value is USD.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the cart delivery group method adjustment.

Field	Details
PriceAdjustmentCauseId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the price adjustment cause. This field is a relationship field. Relationship Name PriceAdjustmentCause Relationship Type Lookup Refers To Promotion
Priority	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description If there are multiple promotional adjustments, the order in which the shipping promotion is applied.

CartItem

Represents an item in a `WebCart` that's active in a store built with B2B. Cart item can be of type `Product` or `Charge`. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The `CartItem` object is available only if the B2B Commerce license is enabled.

Fields

Field	Details
AdjustmentAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description Non-itemized adjustments for this cart item.
AdjustmentTaxAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description The tax that's calculated on the AdjustmentAmount.
AssociatedItemPricing	Type picklist Properties Create, Filter, Nillable, Sort, Update Description Specifies how a child cart item is priced relative to its parent cart item within a product bundle. This field is null for standalone products that aren't part of a bundle. Available in API version 65.0 and later. Possible values are: - IncludedInBundlePrice—Indicates that the parent product's price includes the aggregated prices of its child components. - NotIncludedInBundlePrice—Indicates that the parent product's price doesn't include the aggregated prices of its child components.
BillingFrequency	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies how often a subscription is billed. Available in API version 59.0 and later. Possible values are: - Annual - MilestonePlan - Monthly - Quarterly

Field	Details
	Semi-Annual
CartDeliveryGroupId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the <code>CartDeliveryGroup</code> that's associated with a cart item. This field is a relationship field. Relationship Name <code>CartDeliveryGroup</code> Relationship Type Lookup Refers To <code>CartDeliveryGroup</code>
CartId	Type reference Properties Create, Filter, Group, Sort Description The ID of the <code>WebCart</code> that's associated with a cart item. This field is a relationship field. Relationship Name <code>Cart</code> Relationship Type Lookup Refers To <code>WebCart</code>
ChildProductCount	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The total number of child products associated with this cart item. If a child product is a bundle, its own <code>ChildProductCount</code> is included in this total. For simple products that don't have any child products, the <code>ChildProductCount</code> value is zero.
ConfigureDuringSale	Type picklist

Field	Details
	Properties Create, Filter, Nillable, Sort, Update Description Specify whether a product bundle is configurable. Available in API version 65.0 and later. Possible values are: - Allowed - NotAllowed
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The ISO code for the currency that's specified on the buyer's account. Default value is USD. Possible values are: - AED—UAE Dirham - AUD—Australian Dollar - BRL—Brazilian Real - CAD—Canadian Dollar - EUR—Euro - GBP—British Pound - INR—Indian Rupee - JPY—Japanese Yen - SEK—Swedish Krona - USD—U.S. Dollar
DistributedAdjustment Amount	Type currency Properties Defaulted on create, Filter, Nillable, Sort Description A calculated field that determines the amount of a cart-wide promotional adjustment when distributed across all items in the cart. This field is for display purposes only and is valid only during checkout. This field is available in API version 52.0 and later. You receive \$10 off, and there are 5 items in the cart. The distributed adjustment is (-\$2).
DistributedAdjustment TaxAmount	Type currency Properties Defaulted on create, Filter, Nillable, Sort

Field	Details
	Description A calculated field that determines the amount of a cart-wide tax adjustment due to promotions when distributed across all items in the cart. This field is available in API version 52.0 and later. EXAMPLE: Your discount causes a cart-wide tax reduction of (-\$10), and there are 5 items in the cart. The distributed tax adjustment is (-\$2).
FirstPymtPriceAferAdjustments	Type currency Properties Create, Filter, Nillable, Sort, Update Description The first term price for term-based subscription products, after price adjustments are applied. The total amount for a non-subscription product or a non-term based subscription product, after price adjustments are applied. This is available in API version 60.0 and later.
FirstPymtTax	Type currency Properties Create, Filter, Nillable, Sort, Update Description The tax for the first term price for term-based subscription products. The tax amount for a non-subscription product or a non-term subscription product. This field is available in API version 60.0 and later.
GrossAdjustmentAmount	Type currency Properties Filter, Nillable, Sort Description The gross amount of the price adjustment on the cart item (tax inclusive). This is available in API version 55.0 and later.
GrossUnitPrice	Type currency Properties Create, Filter, Nillable, Sort, Update Description The gross amount of the unit price for a cart item (tax inclusive). This is available in API version 55.0 and later.
IsShippingChargeNotApplicable	Type boolean

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether shipping charges are applicable (<code>true</code>) or not (<code>false</code>) to the cart item. The default value is <code>false</code>. This field is available in API version 64.0 and later.
ItemizedAdjustmentAmount	Type currency Properties Defaulted on create, Filter, Nillable, Sort Description A calculated field that determines the total amount of promotional adjustments that are specific to an item. This field is available in API version 52.0 and later. EXAMPLE: One cart item has one discount code for \$10 off. Your itemized adjustment amount is (-\$10) for that item.
ItemizedAdjustmentTaxAmount	Type currency Properties Defaulted on create, Filter, Nillable, Sort Description A calculated field that determines the total amount of promotion-related tax adjustments that are specific to an item. This field is available in API version 52.0 and later. EXAMPLE: One cart item has one discount code for \$10 off. This reduces the tax on that item by (-\$2). Your itemized adjustment tax amount is (-\$2) for that item.
ListPrice	Type currency Properties Create, Filter, Nillable, Sort, Update Description The original price of the cart item. Typically shown with a line through it. List price is shown only when it's higher than the negotiated price. If the list price is the same or lower, it isn't shown to the buyer. This field is available in API version 52.0 and later.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of this <code>CartItem</code> record. <code>Name</code> can be up to 255 characters.

Field	Details
NetAdjustmentAmount	Type currency Properties Filter, Nillable, Sort Description The net amount of the price adjustment made on the cart item (tax exclusive). This is available in API version 55.0 and later.
NetUnitPrice	Type currency Properties Create, Filter, Nillable, Sort, Update Description The net amount of the unit price for the cart item (tax exclusive). This is available in API version 55.0 and later.
NetUnitPriceAfterAdjustments	Type currency Properties Create, Filter, Nillable, Sort, Update Description The net unit price for a cart item, after all tier and promotional price adjustments are applied. This field is available in API version 60.0 and later.
ParentCartItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the cart item's parent <code>CartItem</code>. The value is empty if the item is a top-level cart item. This field is a relationship field. Relationship Name CartItem Relationship Type Lookup Refers To CartItem
PerUnitWeight	Type double

Field	Details
	Properties Create, Filter, Nillable, Sort, Update Description Weight per unit of this cart item, in the unit specified by <code>weightUnit</code>. This field is available in API version 62.0 and later.
PeriodBoundary	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The. Default value is . Possible values are: • <code>AlignToCalendar</code> • <code>Anniversary</code> • <code>DayOfPeriod</code> • <code>LastDayOfPeriod</code>
PeriodBoundaryDay	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The .
PeriodBoundaryStartMonth	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The. Default value is . Possible values are: • 1—January • 10—October • 11—November • 12—December • 2—February • 3—March • 4—April • 5—May • 6—June • 7—July

Field	Details
	8—August 9—September
PriceBookEntryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the price book entry for the product. This field is available in API version 60.0 and later. This field is a relationship field. Relationship Name PricebookEntry Relationship Type Lookup Refers To PricebookEntry
PricingTermCount	Type double Properties Create, Filter, Nillable, Sort, Update Description A calculated field that indicates the number of pricing terms in the subscription. This field is available in API version 59.0 and later.
Product2Id	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of a product type cart item. Cart items can be of type <code>PRODUCT</code> or <code>CHARGE</code>. This field is a relationship field. Relationship Name Product2 Relationship Type Lookup Refers To Product2

Field	Details
ProductClass	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The product class of the cart item. Default value is Simple. Possible values are: • Bundle • Set • Simple • Variation • VariationParent
ProductRelatedComponentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the cart item's ProductRelatedComponent. The ProductRelatedComponent represents a product that is included in a product bundle, a set, or a product and an add-on. The ProductRelatedComponent is empty if the item is a top-level cart item. This field is a relationship field. Relationship Name ProductRelatedComponent Relationship Type Lookup Refers To ProductRelatedComponent
ProductSellingModelId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the model used to sell a product. This field is available in API version 59.0 or later. This field is a relationship field. Relationship Name ProductSellingModel Relationship Type Lookup

Field	Details
	Refers To ProductSellingModel
ProductValidationKey	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The product validation key of the cart item.
ProductRelationshipTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the product relationship type that defines the relationship between a product bundle and its child product. Available in API version 65.0 and later. This field is a relationship field. Relationship Name ProductRelationshipType Relationship Type Lookup Refers To https://developer.salesforce.com/docs/api-references/for-api-data/productrelationshiptype ProductRelationshipType
ProrationPolicyId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the proration policy, which defines how prices are calculated for each time period within a subscription term. This field is available in API version 60.0 and later. This field is a relationship field. Relationship Name ProrationPolicy Relationship Type Lookup Refers To Proration Policy

Field	Details
Quantity	Type double Properties Create, Filter, Nillable, Sort, Update Description The number of a given cart item in a cart.
QuantityScaleMethod	Type picklist Properties Create, Filter, Nillable, Sort, Update Description Determines how a child product's quantity scales when added to a cart or configured within a product bundle. Available in API version 65.0 and later. Possible values are: • <code>Constant</code>—Represents a value that remains fixed relative to the parent bundle. • <code>Proportional</code>—Represents a value that varies in proportion to the parent bundle's price or quantity.
SalesPrice	Type currency Properties Create, Filter, Nillable, Sort, Update Description The discounted price of a cart item.
SellingModelType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of the product selling model associated with a term-based subscription product. This field is available in API version 60.0 and later. Possible values are: • <code>Evergreen</code> • <code>OneTime</code> • <code>TermDefined</code> The default value is <code>OneTime</code>.
Sku	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The Shelf-Keeping Unit ID of a cart item.
StockCheckMethod	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Determines how inventory is assessed for a cart item that's part of a bundle or set. Possible values are: • <code>ChildProducts</code>—Inventory is assessed based on the child product or products. • <code>ParentProduct</code>—Inventory is assessed based on the parent product.
SubType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the subtype of the product. Possible values are: • <code>Bonus</code>—Bonus product. • <code>GiftWrap</code>—Gift wrapped product. This field is available in API version 64.0 and later.
SubscriptionTerm	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of terms (years or months, for example) in the subscription. This field is available in API version 59.0 and later.
TaxTreatmentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the related tax treatment for the cart item. This field is available in API version 63.0 and later. This field is available with Subscription Management. This field is a relationship field.

Field	Details
	Relationship Name TaxTreatment Relationship Type Lookup Refers To TaxTreatment
TotalAdjustmentAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description The total amount of all promotional adjustments on the item, both distributed and itemized. This field is available in API version 52.0 and later.
TotalAmount	Type currency Properties Filter, Nillable, Sort Description The total cost of this cart item, including taxes and adjustments.
TotalFirstPymtAdjAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description The total adjustment amount for the first payment of a term-based susbcription product. The TotalAdjustmentAmount for non-subscription products and non-term based subscription products. This field is available in API version 63.0 and later.
TotalFirstPymtListPrice	Type currency Properties Create, Filter, Nillable, Sort, Update Description The first-payment amount for a term-based subscription product, based on the product's ListPrice. This is the same value as TotalListPrice for non-subscription products or non-term based subscription products. This price is only for comparison, and not the price at which the buyer purchases a product. This field is available in API version 63.0 and later.

Field	Details
TotalFirstPymtPrice	Type currency Properties Create, Filter, Nillable, Sort, Update Description The first term price for term-based subscription products. The price of a line item for non-subscription products and non-term based subscription products. This price includes price adjustments and excludes taxes. This field is available in API version 63.0 and later.
TotalLineAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description Total amount for this cart item, based on sales price and quantity.
TotalLineFirstPymtAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description The first term price for term-based subscription products, calculated based on the sales price and quantity, before any price adjustments are made. This is the same value as TotalLineAmount for non-subscription products and non-term based subscription products. This field is available in API version 63.0 and later.
TotalLineFirstPymtTaxAmount	Type currency Properties Defaulted on create, Filter, Nillable, Sort Description The tax on the first payment amount, after price adjustments, for term-based subscription products. The tax on the price of the product for non-subscription products and non-term based subscription products. Taxes are also calculated on the delivery charge items. This field is a calculated field. This field is available in API version 63.0 and later.
TotalLineGrossAmount	Type currency Properties Filter, Nillable, Sort

Field	Details
	Description The total gross amount of the line item (tax inclusive). This is available in API version 55.0 and later.
TotalLineNetAmount	Type currency Properties Filter, Nillable, Sort Description The total net amount of the line item (tax exclusive). This is available in API version 55.0 and later.
TotalLineTaxAmount	Type currency Properties Defaulted on create, Filter, Nillable, Sort Description Total tax amount for TotalLineAmount.
TotalListPrice	Type currency Properties Create, Filter, Nillable, Sort, Update Description Total amount for this cart item, based on ListPrice. We provide this value for comparison. It's not the price that the buyer is paying.
TotalPrice	Type currency Properties Create, Filter, Nillable, Sort, Update Description Total amount for this cart item, including adjustments but excluding taxes.  Note: Although this field is Nillable, if you want to use Commerce Webstore Cart Promotions , this field is required.
TotalPriceAfterAllAdjustments	Type currency Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description Total price after all price adjustments are applied. This field is available in API version 52.0 and later.  Note: Although this field is Nillable, if you want to use Commerce Webstore Cart Promotions, this field is required.
TotalPriceTaxAmount	Type currency Properties Filter, Nillable, Sort Description Total tax amount for a cart item before promotional adjustments, including quantity-based adjustments. This field is available in API version 56.0 and later.
TotalPromoAdjustmentAmount	Type currency Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description Total itemized and distributed adjustment amount in cart (only for promotions). This field is available in API version 52.0 and later.
TotalPromoAdjustmentTaxAmount	Type currency Properties Filter, Nillable, Sort Description Total itemized and distributed adjustment tax amount in cart (only for promotions). This field is available in API version 52.0 and later.
TotalTaxAmount	Type currency Properties Filter, Nillable, Sort Description Total tax amount for this cart item. This value includes taxes for both TotalLineAmount and AdjustmentAmount.
TotalWeight	Type double Properties Filter, Nillable, Sort

Field	Details
	Description Total weight of this cart item, in the unit specified by <code>WeightUnit</code> . This field is available in API version 62.0 and later.
Type	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The <code>CartItem</code> type. Possible values are: • <code>Product</code> • <code>Charge</code>
UnitAdjustedPrice	Type currency Properties Create, Filter, Nillable, Sort, Update Description Price per quantity unit after a tier discount or surcharge is applied. This field is available in API version 50.0 and later.
UnitAdjustedPrice WithItemAdj	Type currency Properties Create, Filter, Nillable, Sort, Update Description Unit price, including both tier and item level discounts, for the item.
UnitAdjustmentAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description Tier discount or surcharge to apply to a quantity unit. This amount is added to the <code>SalesPrice</code> to get the <code>UnitAdjustedPrice</code> . This field is available in API version 50.0 and later.
UnitItemAdjustment Amount	Type currency Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description Item level adjustments made to the unit price for the item.
UnitPriceAfterAdjustments	Type currency Properties Create, Filter, Nillable, Sort, Update Description The unit price for a cart item, after tier and promotional price adjustments are applied. This field is available in API version 60.0 and later.
WeightUnit	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Unit of measurement for the weight of the cart item. This field is available in API version 62.0 and later. Possible values are: • Grams • Kilograms • Ounces • Pounds

Associated Objects

This object has the following associated objects. Unless it's noted, associated objects are available in the same API version as this object.

[CartItemChangeEvent](#) (API version 58.0)

Change events are available for the object.

SEE ALSO:

[Commerce Webstore Cart Promotions](#)

[Commerce Webstore Promotions, Associate Action](#)

[Commerce Webstore Promotions, Execute Action](#)

[CartDeliveryGroup](#)

[WebCart](#)

CartItemAttribute

Represents the attributes associated with a cart item, stored as key-value pairs. These attributes are derived from the product and carried forward to the order during checkout. This object is available in API version 66.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

The CartItemAttribute object is available only if the B2B Commerce license, the Salesforce CPQ feature, and Commerce Dynamic Bundles are enabled in your Salesforce org.

Fields

Field	Details
AttributeDefinitionId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the attribute definition associated with the cart item attribute. This field is a relationship field. Relationship Name AttributeDefinition Relationship Type Lookup Refers To AttributeDefinition
AttributeName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the cart item attribute.
AttributePicklistValueId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The ID of the picklist value associated with the cart item attribute. This field is a relationship field. Relationship Name AttributePicklistValue Relationship Type Lookup Refers To AttributePicklistValue
AttributeValue	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The value of the cart item attribute, such as Blue or Large.
CartItemId	Type reference Properties Create, Filter, Group, Sort Description The ID of the cart item to which this attribute is assigned. This field is a relationship field. Relationship Name CartItem Relationship Type Master-detail Refers To CartItem (the master object)
ExternalId	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An auto-generated ID for the attribute record that's stored in an external system, such as the HBase database.
IsPriceImpacting	Type boolean

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates whether the attribute affects cart pricing (<code>true</code>) or not (<code>false</code>). This field determines whether the Commerce Pricing API calls must be triggered to update the price.
UnitOfMeasure	Type reference Properties Create, Filter, Group, Sort Description The ID of the unit of measure associated with the cart item attribute. This field is available only if the AttributeUomPilot Org perm is enabled. Contact Salesforce support for assistance. This field is a relationship field. Relationship Name UnitOfMeasure Relationship Type Lookup Refers To UnitOfMeasure

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[CartItemAttributeChangeEvent](#) on page 68

Change events are available for the object.

[CartItemAttributeFeed](#) on page 55

Feed tracking is available for the object.

[CartItemAttributeHistory](#) on page 63

History is available for tracked fields of the object.

[CartItemAttributeOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[CartItemAttributeShare](#) on page 67

Sharing is available for the object.

CartItemPriceAdjustment

Price adjustment for a cart item. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The CartItemPriceAdjustment object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
AdjustmentAmountScope	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Scope of the adjustment amount for a promotion. Possible values are: • Total—The amount off the total price. This field is available in API version 54.0 and later.
AdjustmentBasisReferenceId	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Coupon code of the coupon associated with a promotion. This field is available in API version 54.0 and later. This is a relationship field. Relationship Name AdjustmentBasisReference Relationship Type Lookup Refers To Coupon
AdjustmentSource	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description Price adjustment type. Possible values are: - Discretionary - Promotion - System
AdjustmentTargetType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Target for the price adjustment (the cart itself or individual items). Possible values are: - Cart - Item
AdjustmentType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Indicates if the price adjustment is applied as percentage or an absolute amount. Possible values are: - AdjustmentAmount - AdjustmentPercentage
AdjustmentValue	Type double Properties Create, Filter, Sort, Update Description Numeric value of the adjustment (for example, 10 if the price adjustment is either 10% off or \$10 off).
CartId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The ID of the WebCart that's associated with a cart item. This field is available in API version 55.0 and later. This is a relationship field. Relationship Name Cart Relationship Type Lookup Refers To WebCart
CartItemId	Type reference Properties Create, Filter, Group, Sort Description ID of the parent cart item to which this adjustment belongs. This is a relationship field. Relationship Name CartItem Relationship Type Lookup Refers To CartItem
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The ISO code for the currency that's specified on the buyer's account. Default value is USD. Possible values are: • EUR—Euro • USD—U.S. Dollar
Description	Type textarea Properties Create, Nillable, Update

Field	Details
	Description Description of the price adjustment.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the price adjustment.
PriceAdjustmentCauseId	Type reference Properties Create, Filter, Group, Sort, Nillable, Update Description ID of entity that caused this adjustment (for example, a promotion ID). If unspecified, then <i>Description</i> populates the display name. This is a relationship field. Relationship Name PriceAdjustmentCause Relationship Type Lookup Refers To Promotion
Priority	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description If there are multiple price adjustments, sequence in which the price adjustments are applied.
TotalAmount	Type currency Properties Create, Filter, Sort, Update Description Total price after applying price adjustments.
TotalGrossAmount	Type currency

Field	Details
	Properties Filter, Nillable, Sort Description The total gross amount (tax inclusive) after applying price adjustments. This field is available in API version 55.0 and later.
TotalNetAmount	Type currency Properties Filter, Nillable, Sort Description The total net amount (tax exclusive) after applying price adjustments. This field is available in API version 55.0 and later.
TotalTax	Type currency Properties Filter, Nillable, Sort Description Tax on the total adjusted price.
WebCartAdjustmentGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the cart's adjustment group. This is a relationship field. Relationship Name WebCartAdjustmentGroup Relationship Type Lookup Refers To WebCartAdjustmentGroup

Associated Objects

This object has the following associated objects. Unless it's noted, associated objects are available in the same API version as this object.

[CartItemPriceAdjustmentChangeEvent](#) (API version 58.0)

Change events are available for the object.

CartTax

Represents taxes for a line item in a `WebCart` that's active in a store built with B2B Commerce or D2C Commerce. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The `CartTax` object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
<code>AdjustmentTargetType</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Target for the price adjustment (the cart itself or individual items). This field is available in API version 52.0 and later. Possible values are: • <code>Cart</code> • <code>Item</code>
<code>Amount</code>	Type currency Properties Create, Filter, Sort, Update Description Calculated tax amount.
<code>CartId</code>	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the <code>WebCart</code> being taxed.

Field	Details
CartItemId	Type reference Properties Create, Filter, Group, Sort Description The ID of a cart item being taxed.
CartItemPriceAdjustmentId	Type reference Properties Create, Filter, Group, Sort Description The ID of a price adjustment for a cart item being taxed. (This field is available in API version 52.0 and later.) Refers To CartItemPriceAdjustment
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The ISO code for the currency that's specified on the buyer's account. Default value is USD. Valid values include: • USD—U.S. Dollar
Description	Type textarea Properties Create, Nillable, Update Description A description of the tax. Enter up to 2000 characters.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of this CartTax record. Name can be up to 255 characters.

Field	Details
TaxCalculationDate	Type date Properties Create, Filter, Group, Sort, Update Description The date this tax was calculated.
TaxRate	Type percent Properties Create, Filter, Nillable, Sort, Update Description The applied tax rate for this line of tax.
TaxType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of tax for this line of tax. Possible values are: • Actual • Estimated

Associated Objects

This object has the following associated objects. Unless it's noted, associated objects are available in the same API version as this object.

CartTaxChangeEvent (API version 58.0)

Change events are available for the object.

SEE ALSO:

[WebCart](#)

CartValidationOutput

Associate errors to cart entities, such as cart line items, delivery groups, and the like, in a store built with B2B Commerce or D2C Commerce. An example error is "Out of stock." Available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The CartValidationOutput object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
BackgroundOperationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the background operation that ran the validation.
CartId	Type reference Properties Create, Filter, Group, Sort Description ID of the related <code>WebCart</code> .
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The ISO code for the currency that's specified on the buyer's account. Default value is <code>USD</code> . Possible values are: • <code>EUR</code>—Euro • <code>USD</code>—U.S. Dollar
IsDismissed	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the validation process is finished. Default value is <code>false</code> .

Field	Details
Level	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Describes the type of output resulting from the validation process. Possible values are: • 0 (Info) • 1 (Error) • 2 (Warning)
Message	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Defines the message to show in the log when validation is complete. Message can be up to 255 characters.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of this CartValidationOutput record. Name can be up to 255 characters.
RelatedEntityId	Type reference Properties Create, Filter, Group, Sort, Update Description Foreign key to WebCart, CartItem, and CartDeliveryGroup.
RelatedEntityPrefix	Type string Properties Filter, Group, Nillable, Sort Description Three-character prefix for the related entity.
Type	Type picklist

Field	Details
	Properties Create, Filter, Group, Restricted picklist, Sort, Update
	Description The CartValidationOutput type. Possible values are: • CartSave — Available in API version 64.0 and later. • Entitlement • Inventory • Other • Pricing • Promotions • Shipping • ShippingPromotions • SystemError • Taxes

Associated Objects

This object has the following associated objects. Unless it's noted, associated objects are available in the same API version as this object.

CartValidationOutputChangeEvent (API version 58.0)

Change events are available for the object.

SEE ALSO:

[WebCart](#)

[CartItem](#)

[CartDeliveryGroup](#)

Case

Represents a case, which is a customer issue or problem.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the account associated with this case. This is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
AssetWarrantyID	Type reference Properties Filter, Group, Nillable, Sort Description ID of the Asset associated with the warranty. Must be a valid asset warranty ID.
BusinessHoursId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the business hours associated with this case.
Comments	Type textarea Properties Create, Delete, Layout, Nillable, Query, Retrieve, Search, Sort, Undelete, Update Description Used to insert a new CaseComment. Email textarea has a length of 4000 chars.
CaseNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort

Field	Details
	Description Assigned automatically when each case is inserted. It can't be set directly, and it can't be modified after the case is created.
ClosedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the case was closed.
CommunityId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the zone associated with this case. This field is available in API version 24.0 and later.
ConnectionReceivedId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the PartnerNetworkConnection that shared this record with your organization. This field is available if you enabled Salesforce to Salesforce.
ConnectionSentId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the PartnerNetworkConnection that you shared this record with. This field is available if you enabled Salesforce to Salesforce. This field is supported using API versions earlier than 15.0. In all other API versions, this field's value is null. You can use the new PartnerNetworkRecordConnection object to forward records to connections.
ContactEmail	Type email Properties Filter, Group, Nillable, Sort

Field	Details
	Description Email address for the contact. The Case.ContactEmail field displays the Email field on the contact on page 1381 that is referenced by Case.ContactId. Label is <code>Contact Email</code>. This field is available in API version 38.0 and later.
ContactFax	Type phone Properties Filter, Group, Nillable, Sort Description Fax number for the contact. Label is <code>Contact Fax</code>. This field is available in API version 38.0 and later.
ContactId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the associated contact. This is a relationship field. Relationship Name Contact Relationship Type Lookup Refers To Contact
ContactMobile	Type phone Properties Filter, Group, Nillable, Sort Description Mobile telephone number for the contact. Label is <code>Contact Mobile</code>. This field is available in API version 38.0 and later.
ContactPhone	Type phone Properties Filter, Group, Nillable, Sort Description Telephone number for the contact. Label is <code>Contact Phone</code>. This field is available in API version 38.0 and later.

Field	Details
CreatorFullPhotoUrl	Type string Properties Filter, Group, Nillable, Sort Description URL of the user's profile photo from the feed. Chatter Answers must be enabled to view this field. This field is available in API version 26.0 and later.
CreatorName	Type string Properties Filter, Group, Nillable, Sort Description Name of the user who posted the question or reply. Only the first name of internal users (agents) appears to portal users in the feed. Chatter Answers must be enabled to view this field. This field is available in API version 26.0 and later.
CreatorSmallPhotoUrl	Type string Properties Filter, Group, Nillable, Sort Description URL of the user's thumbnail photo from the feed. Chatter Answers must be enabled to view this field. This field is available in API version 26.0 and later.
Description	Type textarea Properties Create, Nillable, Update Description A text description of the case. Limit: 32 KB.
FeedItemId	Type reference Properties Create, Group, Nillable, Sort Description ID of the question in Chatter associated with the case. This field is available in API version 33.0 and later, and is only accessible in organizations where Question-to-Case is enabled.

Field	Details
HasCommentsUnreadByOwner	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a case contains comments that the case owner hasn't read (<code>true</code>) or not (<code>false</code>).
HasSelfServiceComments	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a case has comments added by a Self-Service user (<code>true</code>) or not (<code>false</code>). Only visible when Customer Portal is enabled.
IsClosed	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the case is closed (<code>true</code>) or open (<code>false</code>). This field is controlled by the <code>Status</code> field; it can't be set directly. Label is <code>Closed</code>.
IsClosedOnCreate	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the case was closed at the same time that it was created (<code>true</code>) or not (<code>false</code>). This flag is read-only and is automatically set when a record is created. It can't be set to <code>true</code> unless the <code>IsClosed</code> flag is also <code>true</code>.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is <code>Deleted</code>.

Field	Details
IsEscalated	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the case has been escalated (<code>true</code>) or not. A case's escalated state does not affect how you can use a case, or whether you can query, delete, or update it. You can set this flag via the API. Label is <code>Escalated</code>.
IsSelfServiceClosed	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the case is closed for Self-Service users (<code>true</code>) or not (<code>false</code>).
IsStopped	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether an entitlement process on a case is stopped (<code>true</code>) or not (<code>false</code>).
IsVisibleInSelfService	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the case can be viewed in the Customer Service Portal, Partner Service Portal, and Self-Service Portal (<code>true</code>) or not (<code>false</code>). This field is applied for case visibility in the Partner Relationship Management, Customer Service Portal, and the earlier version of Self Service Portal. The field does not alter sharing and will not prevent usage of a direct URL to a case if a portal user has read or write access.
Language	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the case. The Language field is available when you enable Einstein Case Classification in Enterprise, Performance, and Unlimited edition orgs with Service Cloud. By default, only Einstein classification apps use this field.

Field	Details
LastReferencedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
MasterRecordId	Type reference Properties Filter, Group, Nillable, Sort Description If this object was deleted as the result of a merge, this field contains the ID of the record that was kept. If this object was deleted for any other reason, or has not been deleted, the value is <code>null</code>. This is a relationship field. Relationship Name MasterRecord Relationship Type Lookup Refers To Case
Origin	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The source of the case, such as Email, Phone, or Web. Label is Case Origin.
OwnerId	Type reference

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the contact who owns the case. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ParentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the parent case in the hierarchy. The label is <code>Parent Case</code>. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To Case
Priority	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The importance or urgency of the case, such as <code>High</code>, <code>Medium</code>, or <code>Low</code>.
QuestionId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The question in the answers zone that is associated with the case. This field does not appear if you don't have an answers zone enabled.

Field	Details
Reason	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The reason why the case was created, such as Instructions not clear, or User didn't attend training.
RecordTypeId	Type reference Properties Create, Filter, Nillable, Update Description ID of the record type assigned to this object.
ServiceContractId	Type reference Properties Create, Filter, Nillable, Update Description Required. ID of the ServiceContract associated with the entitlement. Must be a valid ID.
SlaStartDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Shows the time that the case entered an entitlement process. If you have the Edit permission on cases, you can update or reset the time. This field is available in API version 18.0 and later.
SourceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the social post source.
Status	Type picklist

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The status of the case, such as New, Closed, or Escalated. This field directly controls the <code>IsClosed</code> flag. Each predefined <code>Status</code> value implies an <code>IsClosed</code> flag value. For more information, see <code>CaseStatus</code>.
StopStartDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time an entitlement process was stopped on the case. This field is available in API version 18.0 and later.
Subject	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The subject of the case. Limit: 255 characters.
SuppliedCompany	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The company name that was entered when the case was created. Label is <code>Company</code>.
SuppliedEmail	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description The email address that was entered when the case was created. Label is <code>Email</code>. If your organization has an active auto-response rule, <code>SuppliedEmail</code> is required when creating a case via the API. Auto-response rules use the email in the contact specified by <code>ContactId</code>. If no email address is in the contact record, the email specified here is used.
SuppliedName	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The name that was entered when the case was created. Label is <code>Name</code> .
SuppliedPhone	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The phone number that was entered when the case was created. Label is <code>Phone</code> .
Type	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The type of case, such as <code>Feature Request</code> or <code>Question</code> .



Note: If you are importing Case data and need to set the value for an audit field, such as `CreatedDate`, contact Salesforce. Audit fields are automatically updated during API operations unless you request to set these fields yourself.

Usage

Use the Case object to manage cases for your organization. Client applications can query, update, and delete Attachment records associated with a case via the API.

Assignment Rules

When you query or update a case, your client application can have the case automatically assigned to one or more User records based on assignment rules that have been configured in the user interface. To use this feature, your client application must set either of the following options (but not both) in the `AssignmentRuleHeader` used in the create or update:

Field	Field Type	Details
<code>assignmentRuleId</code>	reference	ID of the assignment rule to use. Can be an inactive assignment rule. If unspecified and <code>useDefaultRule</code> is <code>true</code> , then the default assignment rule is used. To find the ID for a given assignment rule, query the <code>AssignmentRule</code> object (specifying <code>RuleType="caseAssignment"</code>), iterate through the returned <code>AssignmentRule</code> objects, find the one you want to use, retrieve its ID, and then specify its ID in this field in the <code>AssignmentRuleHeader</code> .

Field	Field Type	Details
<code>useDefaultRule</code>	boolean	Specifies whether to use the default rule for rule-based assignment (<code>true</code>) or not (<code>false</code>). The default rule is assigned by users in the Salesforce user interface.

For a code example that shows setting the `AssignmentRuleHeader` for a Lead (which is similar to setting the `AssignmentRuleHeader` for a Case), see [Lead](#).

Separating Accounts from Contacts in Cases

In releases before 8.0, the `AccountId` could not be specified, it was derived from the contact's account. This behavior will continue to be supported in future releases, but you can also now specify an `AccountId`. If you do not specify the `AccountId` during the creation of a case, the value will default to the contact's `AccountId`.



Note: When a record is updated, if the `ContactId` has not changed, then the `AccountId` is not regenerated. This prevents the API from overwriting a value previously changed in the Salesforce user interface. However, if an API call changes the `ContactId` and the `AccountId` field is empty, then the `AccountId` is generated using the contact's account.

Using `_case` with Java

Depending on the development tool you use, you might need to write your application using `_case` instead of `Case`, because `case` is a reserved word in Java.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

CaseChangeEvent (API version 44.0)

Change events are available for the object.

CaseFeed (API version 18.0)

Feed tracking is available for the object.

CaseHistory

History is available for tracked fields of the object.

CaseOwnerSharingRule

Sharing rules are available for the object.

CaseShare

Sharing is available for the object.

SEE ALSO:

[Account](#)

[CaseMilestone](#)

CaseArticle

Represents the association between a Case and a KnowledgeArticle. This object is available in API version 20.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`

Special Access Rules

Access to this object is controlled by the parent Case and KnowledgeArticle. However, when querying, access is only controlled by the parent Case.

Customer Portal users can't access this object.

Fields

Field	Details
ArticleLanguage	Type picklist Properties Filter, Restricted picklist Description The language of the article associated with the case.
ArticleVersionNumber	Type int Properties Create, Group, Nillable Description The number assigned to a version of an article. This field is available in API version 24.0 and later.
CaseId	Type reference Properties Create, Filter, Group, Sort Description ID of the Case associated with the KnowledgeArticle.
IsSharedByEmail	Type int

Field	Details
	Properties Create, Group, Nillable
	Description Indicates that the article has been shared with the customer through an email.
KnowledgeArticleId	Type reference
	Properties Create, Filter, Group, Sort
	Description ID of the KnowledgeArticle associated with the Case.

Usage

This object represents the association of a knowledge article with a Case. An article is associated with a case when it's relevant to a specific issue, when it helps an agent solve the case, or when the agent sends the article to a customer.

You can use this object to include case-article associations in Apex and Visualforce.

You can't update this object via the API. If you attempt to create a record that matches an existing record, the create request simply returns the existing record.

SEE ALSO:

[Case](#)

[KnowledgeArticle](#)

CaseComment

Represents a comment that provides additional information about the associated Case.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
CommentBody	Type textarea

Field	Details
	Properties Create, Filter, Nillable, Sort, Update Description Text of the CaseComment. The maximum size of the comment body is 4,000 bytes. Label is Body.
ConnectionReceivedId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the PartnerNetworkConnection that shared this record with your organization. This field is available if you enabled Salesforce to Salesforce.
ConnectionSentId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the PartnerNetworkConnection that you shared this record with. This field is available if you enabled Salesforce to Salesforce. This field is supported using API versions earlier than 15.0. In all other API versions, this field's value is null. You can use the new PartnerNetworkRecordConnection object to forward records to connections.
CreatorFullPhotoUrl	Type string Properties Filter, Group, Nillable, Sort Description URL of the user's profile photo from the feed. Chatter Answers must be enabled to view this field. This field is available in API version 26.0 and later.
CreatorName	Type string Properties Filter, Group, Nillable, Sort Description Name of the user who posted the question or reply. Only the first name of internal users (agents) appears to portal users in the feed. Chatter Answers must be enabled to view this field. This field is available in API version 26.0 and later.

Field	Details
CreatorSmallPhotoUrl	Type string Properties Filter, Group, Nillable, Sort Description URL of the user's thumbnail photo from the feed. Chatter Answers must be enabled to view this field. This field is available in API version 26.0 and later.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
IsNotificationSelected	Type boolean Properties Create, Defaulted on create, Update Description Indicates whether an email notification is sent to the case contact when a CaseComment is created or updated. When this field is queried, it always returns null. This field is available only when the <code>Enable Case Comment Notification to Contacts</code> setting is enabled on the Support Settings page in Setup. To send email notifications for CaseComment, you must use the <code>EmailHeader triggerUserEmail</code>. Available in API version 43.0 and later.
IsPublished	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the CaseComment is visible to customers in the Self-Service portal (<code>true</code>) or not (<code>false</code>). Label is Published. This is the only CaseComment field that can be updated via the API.
ParentId	Type reference Properties Create, Filter, Group, Sort,

Field	Details
	Description Required. ID of the parent Case of the CaseComment. This is a relationship field.
	Relationship Name Parent
	Relationship Type Lookup
	Refers To Case

 **Note:** If you're importing CaseComment data and must set the value for an audit field, such as `CreatedDate`, contact Salesforce. Record id's can't delete CaseComments entities when calling the `Database.delete()` Apex method or its analogous SOAP API. Audit fields are automatically updated during API operations unless you request to set these fields yourself.

Usage

In the Salesforce user interface, comments are entered by a User working on a Case. All users have access to create and view CaseComment in the Salesforce user interface and when using the API. In the API, CaseComment records can't be modified after insertion unless the user has the "Modify All Records" object-level permission for Cases or the "Modify All Data" permission. If not, users can only update the `IsPublished` field, and can't delete CaseComment.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

CaseContactRole

Represents the role that a given Contact plays on a Case.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
<code>CasesId</code>	Type reference

Field	Details
	Properties Create, Filter, Group, Sort Description ID of the cases associated with this contact. This is a relationship field. Relationship Name Cases Relationship Type Lookup Refers To Case
ContactId	Type reference Properties Create, Filter, Group, Sort, Update Description Required. ID of the contact. This is a relationship field. Relationship Name Contact Relationship Type Lookup Refers To Contact
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
Role	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Name of the role played by the contact on this case, such as Technical Contact, Business Contact, Decision Maker, and so on. Must be unique—there can't be multiple records in

Field	Details
	which the <code>CaseId</code> , <code>ContactId</code> , and <code>Role</code> values are identical. Different contacts can play the same role on the same case. A contact can play different roles on the same case.

Usage

Use this object to define the role that a given Case plays on a given Contact. For example, you can use this object to be able to see all contacts who are associated to a case, or, given a contact, be able to query all cases that they are associated with, even if they are not the primary contact on the case.

CaseHistory

Represents historical information about changes that have been made to the associated Case.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Special Access Rules

This object is always read-only.

Fields

Field	Details
<code>CaseId</code>	Type reference Properties Filter, Group, Sort Description ID of the Case associated with this record. This is a relationship field. Relationship Name Case Relationship Type Lookup Refers To Case

Field	Details
DataType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Data type of the field that was changed.
Field	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Name of the case field that was modified, or a special value to indicate some other modification to the case. The possible values, in addition to the case field names, are: • ownerAssignment—The owner of the case was changed. • ownerAccepted—A user took ownership of a case from a queue. • ownerEscalated—The owner of the case was changed due to case escalation. • external—A user made the case visible to customers in the Customer Self-Service Portal.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
NewValue	Type anyType Properties Nillable, Sort Description New value of the modified case field. Maximum of 255 characters.
OldValue	Type anyType Properties Nillable, Sort Description Previous value of the modified case field. Maximum of 255 characters.

Usage

Case history entries are indirectly created each time a case is modified.

Two rows are added to this record when foreign key fields change. One row contains the foreign key object names that display in the online application. For example, `Jane Doe` is recorded as the name of a Contact. The other row contains the actual foreign key ID that is only returned to and visible from the API.

This object respects field level security on the parent object.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

CaseHistory2

Represents historical information about owner and status changes that have been made to the associated Case. This object is available in API version 59.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

This object is always read-only.

Fields

Field	Details
CaseId	Type reference Properties Filter, Group, Sort Description The ID of the Case associated with this record. This is a relationship field. Relationship Name Case Relationship Type Lookup Refers To Case

Field	Details
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the contact who owns the case. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PreviousUpdate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the case was last updated.
Status	Type string Properties Filter, Group, Nillable, Sort Description The status of the case, such as <code>New</code>, <code>Closed</code>, or <code>Escalated</code>.

Usage

CaseHistory2 entries are intended for case history reports.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[CaseHistory2ChangeEvent](#) on [page 68](#)

Change events are available for the object in API version 60.0 or later.

CaseMilestone

Represents a milestone (required step in a customer support process) on a Case. This object is available in API version 18.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`

Fields

Field	Details
BusinessHoursId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the BusinessHours associated with the CaseMilestone.
CaseId	Type reference Properties Filter Description ID of the case.
CompletionDate	Type dateTime Properties Filter, Nillable, Update Description The date and time the milestone was completed.
ElapsedTimeInDays	Type double

Field	Details
	Properties Filter, Nillable Description The time required to complete a milestone in days.
ElapsedTimeInHrs	Type double Properties Filter, Nillable Description The time required to complete a milestone in hours.
ElapsedTimeInMins	Type int Properties Filter, Nillable Description The time required to complete a milestone in minutes.
IsCompleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the milestone is completed (<code>true</code>) or not (<code>false</code>).
IsViolated	Type boolean Properties Defaulted on create, Filter Description Indicates whether the milestone is violated (<code>true</code>) or not (<code>false</code>).
MilestoneTypeId	Type reference Properties Filter, Nillable Description The ID of the milestone on the case.
StartDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Update Description The date and time the milestone started on the case.
TargetDate	Type dateTime Properties Filter Description The date and time the milestone must be completed.
TargetResponseInDays	Type double Properties Filter, Nillable, Sort Description The time to complete the milestone in days.
TargetResponseInHrs	Type double Properties Filter, Nillable, Sort Description The time to complete the milestone in hours.
TargetResponseInMins	Type int Properties Filter, Group, Nillable, Sort Description The time to complete the milestone in minutes.
TimeRemainingInDays	Type double Properties Group, Nillable, Sort Description Time remaining to reach the milestone target, measured in days.
TimeRemainingInHrs	Type text

Field	Details
	Properties Nillable Description Time remaining to reach the milestone target, measured in hours.
TimeRemainingInMins	Type text Properties Group, Nillable, Sort Description Time remaining to reach the milestone target. The format is minutes and seconds.
TimeSinceTargetInDays	Type double Properties Nillable, Sort Description The time elapsed since the milestone target, measured in days.
TimeSinceTargetInHrs	Type string Properties Group, Nillable, Sort Description The time elapsed since the milestone target, measured in hours.
TimeSinceTargetInMins	Type string Properties Group, Nillable, Sort Description The time elapsed since the milestone target. The format is minutes and seconds.

Usage

This object lets you view a milestone on a case. It also lets you view if the milestone was completed and when it must be completed.

SEE ALSO:

[Case](#)

[MilestoneType](#)

[SlaProcess](#)

CaseOwnerSharingRule

Represents the rules for sharing a case with users other than the owner.



Note: To enable access to this object for your org, contact Salesforce customer support. However, we recommend that you instead use Metadata API to programmatically update owner sharing rules because it triggers automatic sharing rule recalculation. The [SharingRules](#) Metadata API type is enabled for all orgs.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
CaseAccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A value that represents the type of sharing being allowed. The possible values are: • Read • Edit
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description A description of the sharing rule. Maximum size is 1000 characters. This field is available in API version 29.0 and later.
DeveloperName	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Corresponds to Rule Name in the user interface. This field is available in API version 24.0 and later.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance may slow while Salesforce generates one for each record.
GroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the source group. Cases owned by users in the source group trigger the rule to give access.
Name	Type string Properties Create, Filter, Group, Sort, Update Description Label of the sharing rule as it appears in the user interface. Limited to 80 characters. Corresponds to Label on the user interface.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the target user or group. Target users or groups are given access.

Usage

Use this object to manage the sharing rules for cases. General sharing and territory management-related sharing use this object.

SEE ALSO:

- [Case](#)
- [CaseShare](#)
- [Metadata API Developer Guide: SharingRules](#)

CaseParticipant

Represents a junction between a case, and an account or a contact. This object stores the details of the participant associated with a case. This participant could be the applicant, co-applicant, a household, or even a business account. This object is available in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Fields and values added in API version 58.0 are available if the add-on license for Financial Services Cloud is enabled.

Fields

Field	Details
AuthorizationProof	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description How the participant communicated their consent. This field is available in API version 58.0 and later. Possible values are: - Email Consent - Joint Ownership - Power of Attorney - Verbal Consent
CaseId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort, Update Description The case associated with the case participant record. This field is a relationship field. Relationship Name Case Relationship Type Lookup Refers To Case
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, possibly the user only accessed this record or list view (<code>LastReferencedDate</code>) but didn't view it.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the case participant record.
ParticipantId	Type reference Properties Create, Filter, Group, Sort, Update

Field	Details
	Description The participant associated with the case participant record. This field is a polymorphic relationship field. Relationship Name Participant Relationship Type Lookup Refers To Account, Contact
PreferredCallTimeFrom	Type time Properties Create, Filter, Nillable, Sort, Update Description The start of the preferred time window for contacting the participant. This field is available in API version 58.0 and later.
PreferredCallTimeTo	Type time Properties Create, Filter, Nillable, Sort, Update Description The end of the preferred time window for contacting the participant. This field is available in API version 58.0 and later.
PreferredCommunicationMode	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description How the participant prefers to receive messages. This field is available in API version 58.0 and later. Possible values are: • Email • Phone • SMS
Role	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The role of the case participant. Possible values are: • Applicant • Complainant Representative (Available in API version 58.0 and later.) • Inspection Officer • Lawyer • Observer • Perpetrator • Primary Caretaker • Victim The default value is Applicant.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The status of the case participant. Possible values are: • Active • Inactive • In Review (Available in API version 58.0 and later.) • Pending (Available in API version 58.0 and later.) • Submitted (Available in API version 58.0 and later.)

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[CaseParticipantFeed](#) on page 55

Feed tracking is available for the object.

[CaseParticipantHistory](#) on page 63

History is available for tracked fields of the object.

CaseRelatedIssue

This object acts as a junction between a customer issue (Case) and the Incident or Problem that represents an associated service failure. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
CaseId	Type reference Properties Create, Filter, Group, Sort Description A relationship field that represents the case you're linking a Problem or Incident to. Relationship Name Case Relationship Type Lookup Refers To Case
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description A brief description of the related case.
RelatedEntityType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Shows what type of object the related entity is. Possible values are: - Incident - Problem

Field	Details
RelatedIssueId	Type reference Properties Create, Filter, Group, Sort Description A polymorphic relationship field that represents a related Problem or Incident. Relationship Name RelatedIssue Relationship Type Lookup Refers To Incident, Problem
RelationshipType	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Shows how two records relate to each other. Possible values are: • Root Cause • Similar The default value is 'Root Cause'.
UniqueKeyIndex	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description This field is unique within your organization.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[CaseRelatedIssueChangeEvent](#) on page 68 (API version 59.0)

Change events are available for the object.

[CaseRelatedIssueFeed](#) on page 55

Feed tracking is available for the object.

CaseRelatedIssueHistory on page 63

History is available for tracked fields of the object.

CaseShare

Represents a sharing entry on a Case.

You can only create, edit, and delete sharing entries for standard objects whose `RowCause` field is set to `Manual`. Sharing entries for standard objects with different `RowCause` values are created as a result of your Salesforce org's sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren't stored at all.



Note: While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it's possible that we'll stop storing certain share records to improve performance. As a best practice, don't create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`describeObjects()`, `create()`, `delete()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, only users with access to the Case object can access this object.

Fields

The properties available for some fields depend on the default organization-wide sharing settings. The properties listed are true for the default settings of such fields.

Field	Details
<code>CaseAccessLevel</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Level of access that the User or Group has to the Case. The possible values are: • <code>Read</code> • <code>Edit</code> • <code>All</code> This value isn't valid for creating or deleting records. This field must be set to an access level that is higher than the organization's default access level for cases.
<code>CaseId</code>	Type reference

Field	Details
	Properties Create, Filter, Group, Sort Description ID of the Case associated with this sharing entry. This field can't be updated. This is a relationship field. Relationship Name Case Relationship Type Lookup Refers To Case
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
RowCause	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is <code>Manual</code>. If no value is specified, the field defaults to <code>Manual</code>. All other <code>RowCause</code> values are read-only. After the sharing entry is created, this field can't be edited. Valid values include: • <code>Manual</code>—The User or Group has access because a user with "All" access manually shared the Case with them. • <code>Owner</code>—The User is the owner of the Case. • <code>ImplicitChild</code>—The User or Group has access to the Case on the Account associated with this Case. After faster account sharing recalculation is enabled for your org, sharing entries with this value aren't returned in queries. Instead of storing implicit child shares, record access is determined dynamically. • <code>RelatedPortalUser</code>—The portal user is the contact on the Case. • <code>Rule</code>—The User or Group has access via a Case sharing rule. • <code>GuestRule</code>—The User or Group has access via a Case guest user sharing rule. • <code>Team</code>—The User or Group has team access.

Field	Details
	• <code>LpuImplicit</code>—The User has access to records owned by high-volume Experience Cloud site users via a share group. • <code>ARImplicit</code>—The User, who belongs to a partner or customer account, has access to the Case via an account relationship data sharing rule.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the User or Group that has been given access to the Case. This field can't be updated. This is a polymorphic relationship field. Relationship Name UserOrGroup Relationship Type Lookup Refers To Group, User

Usage

This object allows you to determine which users and groups can view and edit Case records owned by other users. If you attempt to create a record that matches an existing record, request updates any modified fields and returns the existing record.

 **Note:** After faster account sharing recalculation is enabled for your org, we no longer store implicit share records between accounts and their child case records. Sharing entries that have a value of `ImplicitChild` in the `RowCause` field aren't returned when you query this object. Instead, the system dynamically determines whether users can access child case records when they try to access them. This change speeds up ownership and sharing recalculation for accounts.

For more information, see the [Faster Account Sharing Recalculation](#) knowledge article.

SEE ALSO:

- [AccountShare](#)
- [LeadShare](#)
- [OpportunityShare](#)

CaseSolution

Represents the association between a Case and a Solution.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
CaseId	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the Case associated with the Solution. This is a relationship field. Relationship Name Case Relationship Type Lookup Refers To Case
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
SolutionId	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the Solution associated with the case. This is a relationship field. Relationship Name Solution Relationship Type Lookup Refers To Solution

Usage

You can't update this object via the API. If you attempt to create a record that matches an existing record, the request simply returns the existing record.

SEE ALSO:

- [CaseShare](#)
- [SolutionStatus](#)

CaseStatus

Represents the status of a Case, such as New, On Hold, or In Process.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. Because changing terms in our code can break current implementations, we maintained this object's name.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
ApiName	Type string Properties Filter, Group, idLookup, Sort Description Uniquely identifies a picklist value so it can be retrieved without using an id or primary label.
IsClosed	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this case status value represents a closed Case (<code>true</code>) or not (<code>false</code>). Multiple case status values can represent a closed Case.
IsDefault	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Indicates whether this is the default case status value (<code>true</code>) or not (<code>false</code>) in the picklist.
MasterLabel	Type string Properties Filter, Group, Nillable, Sort Description Label for this case status value. This display value is the internal label that does not get translated.
SortOrder	Type int Properties Filter, Group, Nillable, Sort Description Number used to sort this value in the case status picklist. These numbers are not guaranteed to be sequential, as some previous case status values might have been deleted.

Usage

This object represents a value in the case status picklist. The case status picklist provides additional information about the status of a Case, such as whether a given `Status` value represents an open or closed case. Query the `CaseStatus` object to retrieve the set of values in the case status picklist, and then use that information while processing Case records to determine more information about a given case. For example, the application could test whether a given case is open or closed based on its `Status` value and the value of the `IsClosed` property in the associated `CaseStatus` object.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

CaseSubjectParticle

Represents the Social Business Rules custom format for the **Case Subject** field on cases created from inbound social posts. This object is available in API version 41.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name for the CaseSubjectParticle object. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. This field is automatically generated, but you can supply your own value if you create the record using the API.  Note: When creating large sets of data, always specify a unique DeveloperName for each record. If no DeveloperName is specified, performance may slow while Salesforce generates one for each record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Index	Type int Properties Create, Filter, Group, idLookup, Sort, Update Description Required. The order in which the custom Case Subject is generated, meaning if the social network is 0 and the social message is 1, then the subject generates as <code>Twitter Tweet</code>.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the case subject field. Possible values are: - ar—Arabic - da—Danish - de—German - en_US—English - es—Spanish - es_MX—Spanish (Mexico)

Field	Details
	• <code>fi</code>—Finnish • <code>fr</code>—French • <code>it</code>—Italian • <code>iw</code>—Hebrew • <code>ja</code>—Japanese • <code>ko</code>—Korean • <code>nl_NL</code>—Dutch • <code>no</code>—Norwegian • <code>pt_BR</code>—Portuguese (Brazil) • <code>ru</code>—Russian • <code>sv</code>—Swedish • <code>th</code>—Thai • <code>zh_CN</code>—Chinese (Simplified) • <code>zh_TW</code>—Chinese (Traditional)
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Label for the case subject field.
TextField	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Specifies inbound social content added to Case Subject in case records.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. Specifies the custom Case Subject format from which inbound social content appears in case records. Possible values are: • <code>ColonSeparator</code> • <code>Content—Message</code> • <code>HyphenSeparator</code>

Field	Details
	• MessageType • PipeSeparator • ProvidedString • RealName • Sentiment • SocialHandle • SocialNetwork • Source

Usage

In the Salesforce UI, case subjects are brief descriptions of cases. They are what agents see on cases first. Social Business Rules specify the brief descriptions of cases created from social posts. Using CaseSubjectParticle objects you can build your own case subject format, where each object represents a social post's component. For example, combining CaseSubjectParticle objects with components for types MessageType, RealName, and SocialNetwork results in "Tweet Customer123 Twitter".

CaseTag

Associates a word or short phrase with a Case

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
ItemId	Type reference Properties Create, Filter Description ID of the tagged item.
Name	Type string Properties Create, Filter

Field Name	Details
	Description Name of the tag. If this value does not already exist, a new TagDefinition is created and becomes the parent of this Tag object. Otherwise, a TagDefinition with the same name becomes the parent of this Tag object. Parent relationships are created automatically.
TagDefinitionId	Type reference Properties Filter Description ID of the parent TagDefinition object that owns the tag.
Type	Type picklist Properties Create, Filter, Restricted picklist Description Defines the visibility of a tag. Valid values: • Public—The tag can be viewed and manipulated by all users in an organization. • Personal—The tag can be viewed or manipulated only by a user with a matching OwnerId.

Usage

CaseTag stores the relationship between its parent TagDefinition and the Case being tagged. Tag objects act as metadata, allowing users to describe and organize their data.

When a tag is deleted, its parent TagDefinition will also be deleted if the name is not being used; otherwise, the parent remains. Deleting a TagDefinition sends it to the Recycle Bin, along with any associated tag entries.

CaseTeamMember

Represents a case team member, who works with a team of other users to help resolve a case.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only users with read access to the Case object can access this object.

When accessing from Apex code, use the `WITH USER_MODE` clause to enable field-level and object-level security permissions checking for `SOQL SELECT` queries, including subqueries and cross-object relationships. See [Enforce User Mode for Database Operations](#).

Fields

Field	Details
MemberId	Type reference Properties Create, Filter, Group, Sort Description The ID of the user or contact who is a member on a case team. This is a polymorphic relationship field. Relationship Name Member Relationship Type Lookup Refers To Contact, User
ParentId	Type reference Properties Create, Filter, Group, Sort Description The ID of the case with which the case team member is associated. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To Case
TeamRoleId	Type reference Properties Create, Filter, Group, Sort, Update

Field	Details
	Description The ID of the case team role with which the case team member is associated. This is a relationship field. Relationship Name TeamRole Relationship Type Lookup Refers To CaseTeamRole
TeamTemplateId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the predefined team with which the case team member is associated. This is a relationship field. Relationship Name TeamTemplate Relationship Type Lookup Refers To CaseTeamTemplate
TeamTemplateMemberId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the team member included in a predefined case team. This is a relationship field. Relationship Name TeamTemplateMember Relationship Type Lookup Refers To CaseTeamTemplateMember

CaseTeamRole

Represents a case team role. Every case team member has a role on a case, such as “Customer Contact” or “Case Manager.”

Supported Calls

`create()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only users with read access to the Case object can access this object.

Fields

Field	Details
<code>AccessLevel</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A value that represents the type of access granted to the target Group for cases. The possible values are: • None • Read • Edit
<code>Name</code>	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the case team role.
<code>PreferencesVisibleInCSP</code>	Type boolean Properties Create, Filter, Update Description Indicates whether or not the case team role is visible to Customer Portal users.

CaseTeamTemplate

Represents a predefined case team, which is a group of users that helps resolve a case.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only users with read access to the Case object can access this object.

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description A text description of the predefined case team.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the predefined case team.

CaseTeamTemplateMember

Represents a member on a predefined case team, which is a group of users that helps resolve cases.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only users with read access to the Case object can access this object.

Fields

Field	Details
MemberId	Type reference Properties Create, Filter, Group, Sort Description The ID of the user or contact who is a team member on a predefined case team.
TeamRoleId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the predefined case team member's case team role.
TeamTemplateId	Type reference Properties Create, Filter, Group, Sort Description The ID of the predefined case team's template.

CaseTeamTemplateRecord

The CaseTeamTemplateRecord object is a linking object between the Case and CaseTeamTemplate objects. To assign a predefined case team to a case (customer inquiry), create a CaseTeamTemplateRecord record and point the `ParentId` to the case and the `TeamTemplateId` to the predefined case team.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

As of Spring '20 and later, only users with read access to the Case object can access this object.

Fields

Field	Details
ParentId	Type reference Properties Create, Filter, Group, Sort Description The ID of the case with which the case team template record is associated. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To Case
TeamTemplateId	Type reference Properties Create, Filter, Group, Sort Description The ID of the predefined case team with which the case team template record is associated. This is a relationship field. Relationship Name TeamTemplate Relationship Type Lookup Refers To CaseTeamTemplate

CategoryData

Represents a logical grouping of Solution records.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
CategoryId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the CategoryNode associated with the solution.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted .
RelatedSubjectId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the solution related to the category.

Usage

This object allows you to assign one or more categories to a Solution. It is an intermediate data table with two foreign keys that defines the relationship between a CategoryNode and a Solution record.

CategoryData has two foreign keys:

- The first foreign key, `CategoryId`, refers to the ID of a CategoryNode.
- The other foreign key, `RelatedSubjectId`, refers to a Solution ID.

This is a many-to-many relationship, so there can be multiple rows returned with a `CategoryId`. A Solution can be associated with multiple categories.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

CategoryNode

Represents a tree of Solution categories.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

- Customer Portal users can't access this object.
- Attempting to delete a CategoryNode that has children (referred by CategoryNode.Parent), or is referred to elsewhere, causes a failure.

Fields

Field	Details
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Label for the category node.
ParentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the parent of this node, if any.
SortOrder	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the sort order of child CategoryNode objects.
SortStyle	Type picklist

Field	Details
	Properties Create, Filter, Group, Restricted picklist, Sort, Update
	Description Indicates whether the sort order is alphabetical or custom.

Usage

A CategoryNode defines a category of solutions. In the user interface, you can edit category definitions from Setup by entering *Solution Categories* in the **Quick Find** box, then selecting **Solution Categories**.

SEE ALSO:

[CategoryData](#)

[Solution](#)

CategoryNodeLocalization

When the Translation Workbench is enabled for your organization, the CategoryNodeLocalization object provides the translation of the label of a solution category.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

- Your organization must be using Professional, Enterprise, Developer, Unlimited, or Performance Edition and be enabled for the Translation Workbench.
- To view this object, you must have the “View Setup and Configuration” permission.

Fields

Field	Details
CategoryNodeId	Type reference
	Properties Create, Filter, Nillable
	Description The ID of the solution CategoryNode that is being translated.

Field	Details
LanguageLocaleKey	Type picklist Properties Create, Filter, Nillable, Restricted picklist Description This field is available in API version 16.0 and earlier. It is the same as the <code>Language</code> field.
Language	Type picklist Properties Create, Filter, Nillable, Restricted picklist Description This field is available in API version 17.0 and later. The combined language and locale ISO code, which controls the language for labels displayed in an application. This picklist contains the following fully-supported languages: - Chinese (Simplified): <code>zh_CN</code> - Chinese (Traditional): <code>zh_TW</code> - Danish: <code>da</code> - Dutch: <code>nl_NL</code> - English: <code>en_US</code> - Finnish: <code>fi</code> - French: <code>fr</code> - German: <code>de</code> - Italian: <code>it</code> - Japanese: <code>ja</code> - Korean: <code>ko</code> - Norwegian: <code>no</code> - Portuguese (Brazil): <code>pt_BR</code> - Russian: <code>ru</code> - Spanish: <code>es</code> - Spanish (Mexico): <code>es_MX</code> Spanish (Mexico) defaults to Spanish for customer-defined translations. - Swedish: <code>sv</code> - Thai: <code>th</code> The Salesforce user interface is fully translated to Thai, but Help is in English. The following end-user only languages are available. - Arabic: <code>ar</code> - Bulgarian: <code>bg</code>

Field	Details
	• Croatian: <code>hr</code> • Czech: <code>cs</code> • English (UK): <code>en_GB</code> • Greek: <code>el</code> • Hebrew: <code>iw</code> • Hungarian: <code>hu</code> • Indonesian: <code>in</code> • Polish: <code>pl</code> • Portuguese (European): <code>pt_PT</code> • Romanian: <code>ro</code> • Slovak: <code>sk</code> • Slovenian: <code>sl</code> • Turkish: <code>tr</code> • Ukrainian: <code>uk</code> • Vietnamese: <code>vi</code> The following platform languages are available for organizations that use Salesforce exclusively as a platform. • Albanian: <code>sq</code> • Afrikaans: <code>af</code> • Amharic: <code>am</code> • Arabic (Algeria): <code>ar_DZ</code> • Arabic (Bahrain): <code>ar_BH</code> • Arabic (Egypt): <code>ar_EG</code> • Arabic (Iraq): <code>ar_IQ</code> • Arabic (Jordan): <code>ar_JO</code> • Arabic (Kuwait): <code>ar_KW</code> • Arabic (Lebanon): <code>ar_LB</code> • Arabic (Libya): <code>ar_LY</code> • Arabic (Morocco): <code>ar_MA</code> • Arabic (Oman): <code>ar_OM</code> • Arabic (Qatar): <code>ar_QA</code> • Arabic (Saudi Arabia): <code>ar_SA</code> • Arabic (Sudan): <code>ar_SD</code> • Arabic (Syria): <code>ar_SY</code> • Arabic (Tunisia): <code>ar_TN</code> • Arabic (United Arab Emirates): <code>ar_AE</code> • Arabic (Yemen): <code>ar_YE</code> • Armenian: <code>hy</code>

Field**Details**

-
- Basque: eu
 - Bosnian: bs
 - Bengali: bn
 - Burmese: my
 - Catalan: ca
 - Chinese (Hong Kong): zh_HK
 - Chinese (Singapore): zh_SG
 - Chinese (Malaysia): zh_MY
 - Dutch (Belgium): nl_BE
 - English (Australia): en_AU
 - English (Belgium): en_BE
 - English (Canada): en_CA
 - English (Cyprus): en_CY
 - English (Germany): en_DE
 - English (Hong Kong): en_HK
 - English (India): en_IN
 - English (Ireland): en_IE
 - English (Israel): en_IL
 - English (Malaysia): en_MY
 - English (Malta): en_MT
 - English (Netherlands): en_NL
 - English (New Zealand): en_NZ
 - English (Philippines): en_PH
 - English (Singapore): en_SG
 - English (South Africa): en_ZA
 - English (United Arab Emirates): en_AE
 - Estonian: et
 - Farsi: fa
 - French (Belgium): fr_BE
 - French (Canada): fr_CA
 - French (Luxembourg): fr_LU
 - French (Morocco): fr_MA
 - French (Switzerland): fr_CH
 - Georgian: ka
 - German (Austria): de_AT
 - German (Belgium): de_BE
 - German (Luxembourg): de_LU
 - German (Switzerland): de_CH
-

Field

Details

- Greek (Cyprus): `e1_CY`
- Greenlandic: `k1`
- Gujarati: `gu`
- Hawaiian: `haw`
- Haitian Creole: `ht`
- Hindi: `hi`
- Hmong: `hmn`
- Icelandic: `is`
- Irish: `ga`
- Italian (Switzerland): `it_CH`
- Kannada: `kn`
- Kazakh: `kk`
- Khmer: `km`
- Latvian: `lv`
- Lithuanian: `lt`
- Luxembourgish: `lb`
- Macedonian: `mk`
- Malay: `ms`
- Malayalam: `ml`
- Maltese: `mt`
- Marathi: `mr`
- Montenegrin: `sh_ME`
- Punjabi: `pa`
- Romanian (Moldova): `ro_MD`
- Romansh: `rm`
- Russian (Armenia): `ru_AM`
- Russian (Belarus): `ru_BY`
- Russian (Kazakhstan): `ru_KZ`
- Russian (Kyrgyzstan): `ru_KG`
- Russian (Lithuania): `ru_LT`
- Russian (Moldova): `ru_MD`
- Russian (Poland): `ru_PL`
- Russian (Ukraine): `ru-UA`
- Samoan: `sm`
- Serbian (Cyrillic): `sr`
- Serbian (Latin): `sh`
- Spanish (Argentina): `es_AR`
- Spanish (Bolivia): `es_BO`

Field	Details
	- Spanish (Chile): <code>es_CL</code> - Spanish (Colombia): <code>es_CO</code> - Spanish (Costa Rica): <code>es_CR</code> - Spanish (Dominican Republic): <code>es_DO</code> - Spanish (Ecuador): <code>es_EC</code> - Spanish (El Salvador): <code>es_SV</code> - Spanish (Guatemala): <code>es_GT</code> - Spanish (Honduras): <code>es_HN</code> - Spanish (Nicaragua): <code>es_NI</code> - Spanish (Panama): <code>es_PA</code> - Spanish (Paraguay): <code>es_PY</code> - Spanish (Peru): <code>es_PE</code> - Spanish (Puerto Rico): <code>es_PR</code> - Spanish (United States): <code>es_US</code> - Spanish (Uruguay): <code>es_UY</code> - Spanish (Venezuela): <code>es_VE</code> - Swahili: <code>sw</code> - Tagalog: <code>tl</code> - Tamil: <code>ta</code> - Te reo: <code>mi</code> - Telugu: <code>te</code> - Urdu: <code>ur</code> - Welsh: <code>cy</code> - Xhosa: <code>xh</code> - Yiddish: <code>ji</code> - Zulu: <code>zu</code> The values in this field are not related to the default locale selection.
NamespacePrefix	Type string Properties Filter, Nillable Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values.

Field	Details
	- In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. - In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
Value	Type string Properties Create, Filter, Nillable, Update Description The actual translated label for the solution category. Label is Translation.

Usage

Use this object to translate the labels of your solution categories into a supported language. Users with the Translation Workbench enabled can view category node translations, but either the "Customize Application," "Manage Translation," or "Manage Categories" permission is required to create or update category node translations.

SEE ALSO:

[ScontrolLocalization](#)

[WebLinkLocalization](#)

ChangeRequest

Represents a decision to implement a formal request for a change (RFC). This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
<code>BusinessJustification</code>	Type textarea

Field	Details
	Properties Create, Nillable, Update Description A description of the business reason to implement the change. This field can store up to 32 KB of data, but only the first 255 characters display in reports.
BusinessReason	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The core reason for creating the change request. Possible values are: • t2
Category	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The type of change request. Administrators set field values.
ChangeRequestNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The unique, system-generated change request number.
ChangeType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of change request. Administrators set field values. Possible values are: • Emergency • Major • Normal • Standard

Field	Details
Description	Type textarea Properties Create, Nillable, Update Description A description of the change request. This field can store up to 32 KB of data, but only the first 255 characters display in reports.
EstimatedEndTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time (in UTC) when the change request is estimated to be implemented.
EstimatedStartTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The estimated date and time (in UTC) when the change request is implemented.
FinalReviewDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time (in UTC) when the change request was reviewed.
FinalReviewNotes	Type textarea Properties Create, Nillable, Update Description Notes left by the change request reviewer. This field can store up to 32 KB of data, but only the first 255 characters display in reports.
Impact	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Shows the impact of a requested change. Possible values are: • High • Low • Medium The default value is 'High'.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description A polymorphic relationship field that represents the user or group assigned as the change reviewer. Relationship Name Owner Relationship Type Lookup Refers To Group, User
Priority	Type picklist

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The impact and urgency of a requested change. Possible values are: • Critical • High • Low • Moderate The default value is 'Critical'.
RemediationPlan	Type textarea Properties Create, Nillable, Update Description A description of the steps required to resolve the incident. This field can store up to 32 KB of data, but only the first 255 characters display in reports.
ReviewerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the user who reviewed the change request. This is a relationship field. Relationship Name Reviewer Relationship Type Lookup Refers To User
RiskImpactAnalysis	Type textarea Properties Create, Nillable, Update Description An assessment of the risk involved with the implementation of the change request. Administrators set field values, and each value can have up to 20 characters.

Field	Details
RiskLevel	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The risk level associated with adopting the requested change. Possible values are: • High • Low • Medium The default value is 'High'.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Represents any custom or granular stages a customer may want to track. This will be a dependent picklist. Possible values are: • Approved • Canceled • Closed • Implementing • New • Open • Planning • Rejected • Reviewed • Scheduled The default value is 'New'.
StatusCode	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The status of the change. Possible values are:

Field	Details
	• Approved • Canceled • Closed • Implementing • New • Open • Planning • Rejected • Reviewed • Scheduled The default value is 'New'.
Subject	Type string Properties Create, Filter, Group, Sort, Update Description A brief description of the requested change.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ChangeRequestChangeEvent on page 68 (API version 59.0)
Change events are available for the object.

ChangeRequestFeed on page 55
Feed tracking is available for the object.

ChangeRequestHistory on page 63
History is available for tracked fields of the object.

ChangeRequestOwnerSharingRule on page 65
Sharing rules are available for the object.

ChangeRequestShare on page 67
Sharing is available for the object.

ChangeRequestRelatedIssue

Represents a junction object that relates a ChangeRequest to an Incident or Problem due to a service failure. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ChangeRequestId	Type reference Properties Create, Filter, Group, Sort Description The ChangeRequest ID that's linked to the Problem or Incident. Relationship Name ChangeRequest Relationship Type Lookup Refers To ChangeRequest
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description A description of the change request as it relates to the problem or incident.
RelatedEntityType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The name of the related object type. Possible values are: • Incident • Problem
RelatedIssueId	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description A polymorphic relationship field that represents the related Problem or Incident. Relationship Name RelatedIssue Relationship Type Lookup Refers To Incident, Problem
RelationshipType	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Shows how the ChangeRequest and Incident or Problem records relate to each other. Possible values are: • Caused By • Fixed By The default value is 'Caused By'.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ChangeRequestRelatedIssueChangeEvent](#) on page 68

Change events are available for the object.

[ChangeRequestRelatedIssueFeed](#) on page 55

Feed tracking is available for the object.

[ChangeRequestRelatedIssueHistory](#) on page 63

History is available for tracked fields of the object.

ChangeRequestRelatedItem

Represents a junction object that relates a ChangeRequest to an Asset. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AssetId	Type reference Properties Create, Filter, Group, Sort Description The Asset ID that's linked to the ChangeRequest. This field is a relationship field. Relationship Name Asset Relationship Type Lookup Refers To Asset
ChangeRequestId	Type reference Properties Create, Filter, Group, Sort Description The ChangeRequest ID that's linked to the Asset. This field is a relationship field. Relationship Name ChangeRequest Relationship Type Lookup Refers To ChangeRequest
Comment	Type textarea Properties Create, Nillable, Update Description A description of the change request as it relates to the item.
ImpactLevel	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The related item's impact on the change request. Possible values are: • High • Low • Medium The default value is High.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The auto-generated ID of the item that's related to the change request.
RelationshipType	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Shows how the ChangeRequest and Asset records relate to each other. Possible values are: • Broke Item • Fixed Item The default value is Broke Item.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ChangeRequestRelatedItemChangeEvent](#) on page 68

Change events are available for the object.

[ChangeRequestRelatedItemFeed](#) on page 55

Feed tracking is available for the object.

[ChangeRequestRelatedItemHistory](#) on page 63

History is available for tracked fields of the object.

ChangeSetOperationEventLog

Change Set Operation events contain information from change set migrations. This object is available in API version 65.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
ChangeSetName	Type string Properties Filter, Group, Nillable, Sort Description The name of the change set.
ClientId	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP".
CpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
LoginKey	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.
OperationType	Type string Properties Filter, Group, Nillable, Sort Description The operation that's being performed.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.
RunTime	Type double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.
TargetOrganizationIdentifier	Type string Properties Filter, Group, Nillable, Sort Description ID of the organization that's receiving the change set.

Field	Details
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description Timestamp at which the log event was generated.
Uri	Type string Properties Filter, Group, Nillable, Sort Description URI of the page receiving the request.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.

ChannelObjectLinkingRule

Represents a rule for linking a channel interaction with an object (such as Lead or Contact). This object is available in API version 47.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
ActionForNoRecordFound	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description Action to take when no matching records are found. Possible values are: • <code>CreateNewRecordAndLink</code>—Create Record and Link (Recommended) • <code>PromptAgent</code>—Prompt Agent
ActionForSingleRecordFound	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Action to take when one matching record is found. Possible values are: • <code>AutoLink</code>—Auto-Link Record (Recommended) • <code>PromptAgent</code>—Prompt Agent
ChannelType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The type of channel used for this rule. Possible values are: • <code>FacebookMessenger</code> • <code>Phone</code> • <code>Text</code> • <code>WeChat</code> • <code>WhatsApp</code>
Description	Type textarea Properties Create, Nillable, Update Description The description for this linking rule.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update

Field	Details
	Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance may slow while Salesforce generates one for each record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
<code>IsLinkedRecordOpenedAsSubTab</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether to open the linked record as a subtab when the link is established.
<code>IsRuleActive</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the rule is active.
<code>Language</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language for this linking rule. Possible values are: • <code>ar</code>—Arabic • <code>bg</code>—Bulgarian • <code>cs</code>—Czech • <code>da</code>—Danish • <code>de</code>—German • <code>el</code>—Greek • <code>en_GB</code>—English (UK)

Field	Details
	• en_US—English • es—Spanish • es_MX—Spanish (Mexico) • fi—Finnish • fr—French • hr—Croatian • hu—Hungarian • in—Indonesian • it—Italian • iw—Hebrew • ja—Japanese • ko—Korean • nl_NL—Dutch • no—Norwegian • pl—Polish • pt_BR—Portuguese (Brazil) • pt_PT—Portuguese (European) • ro—Romanian • ru—Russian • sk—Slovak • sl—Slovene • sv—Swedish • th—Thai • tr—Turkish • uk—Ukrainian • vi—Vietnamese • zh_CN—Chinese (Simplified) • zh_TW—Chinese (Traditional)
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The unique label name for this rule.
ObjectToLink	Type picklist

Field	Details
	Properties Create, Filter, Group, Restricted picklist, Sort Description The type of object to link to the channel interaction. Possible values are: • Contact
RuleName	Type string Properties Create, Filter, Group, Sort, Update Description Name of the rule as it appears in the UI. Maximum length is 80 characters.

ChannelProgram

Represents a channel program that vendors use to market and sell their products through channel partners. This object is available in API version 41.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Fields

Field Name	Details
Category	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Category of the channel program. Categories group channel programs by type. For example, a reseller category would include all the different regional reseller channel programs.
Description	Type textarea

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the channel program.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the channel program is active. New channel programs are inactive by default.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
Name	Type string Properties Create, Filter, Group, Sort, Update Description Name of the channel program.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field Name	Details
	Description ID of the owner of the channel program.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[ChannelProgramFeed](#)

Feed tracking is available for the object.

[ChannelProgramHistory](#)

History is available for tracked fields of the object.

[ChannelProgramOwnerSharingRule](#)

Sharing rules are available for the object.

[ChannelProgramShare](#)

Sharing is available for the object.

ChannelProgramLevel

Represents a level, based on member experience, in a channel program. This object is available in API version 41.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the channel program level.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field Name	Details
	Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the channel program level.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Required. ID of the user who is the owner of the record.
ProgramId	Type reference Properties Create, Filter, Group, Sort Description ID of the channel program.
Rank	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description An integer associated with the level. For example, 1 represents the lowest level, 2 the next level up, etc.

Field Name	Details
RecordTypeId	Type reference Properties Create, Filter, Nillable, Update Description ID of the record type assigned to this object.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[ChannelProgramLevelFeed](#)

Feed tracking is available for the object.

[ChannelProgramLevelHistory](#)

History is available for tracked fields of the object.

[ChannelProgramLevelOwnerSharingRule](#)

Sharing rules are available for the object.

[ChannelProgramLevelShare](#) (API version 43.0)

Sharing is available for the object.

ChannelProgramMember

Represents a partner who is a member of a channel program. This object is available in API version 41.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Most recent date referenced. This field is available in API version 45.0 and later.

Field Name	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Most recent date viewed. This field is available in API version 45.0 and later.
LevelId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the channel program level.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the channel program member.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Required. ID of the user who is the owner of the record.
PartnerId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the partner.
ProgramId	Type reference Properties Create, Filter, Group, Sort Description ID of the channel program.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

ChannelProgramMemberFeed (API version 46.0)

Feed tracking is available for the object.

ChannelProgramMemberHistory (API version 46.0)

History is available for tracked fields of the object.

ChannelProgramMemberOwnerSharingRule

Sharing rules are available for the object.

ChannelProgramMemberShare (API version 43.0)

Sharing is available for the object.

ChatterActivity

ChatterActivity represents the number of posts and comments made by a user and the number of comments and likes on posts and comments received by the same user. This object is available in API version 23.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field Name	Details
CommentCount	Type int Properties Filter, Group, Sort Description The number of FeedComments made by the ParentId.
CommentReceivedCount	Type int Properties Filter, Group, Sort Description The number of FeedComments received by the ParentId.
InfluenceRawRank	Type int Properties Filter, Group, Sort

Field Name	Details
	Description Number indicating the ParentId's Chatter influence rank, which is calculated based on the ParentId's ChatterActivity statistics, relative to the other users in the organization. This field is available in API version 26.0 and later.
LikeReceivedCount	Type int Properties Filter, Group, Sort Description The number of FeedLikes received by the ParentId.
NetworkId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the Experience Cloud site to which the ChatterActivity belongs. This field is available only if digital experiences is enabled in your org. This field is available in API version 26.0 and later.
ParentId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the object type to which the ChatterActivity is related. In API version 66.0, the ParentId must be a UserId or SelfServiceUser ID.
PostCount	Type int Properties Filter, Group, Sort Description The number of FeedItems made by the ParentId.

Usage

- Use this object to reference the Chatter activity statistics, which include the number of posts and comments made by a user and the number of comments and likes on posts and comments received by the same user.

- You can directly query for ChatterActivity.

```
SELECT Id, PostCount, LikeReceivedCount
FROM ChatterActivity
WHERE ParentId = UserId
```

 **Note:** To query ChatterActivity, you must provide the `ParentId`. In API version 66.0, the `ParentId` must be a `UserId` or `SelfServiceUser` ID.

- A ChatterActivity record is created for users the first time they post or comment. Users who have never posted or commented don't have ChatterActivity records. If users make only one post and then delete it, they do have ChatterActivity records. In both cases, the user interface displays zeros for their Chatter activity.
- Use the `InfluenceRawRank` field to reference a user's Chatter influence rank. This field is available in API version 26.0 and later.

SEE ALSO:

- [FeedItem](#)
- [FeedComment](#)
- [FeedLike](#)

ChatterAnswersActivity

Represents the reputation of a User in Chatter Answers zones.This object is available in API version 25.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
BestAnswerReceivedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of best answers the User has received from other users.
BestAnswerSelectedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of best answers the User has selected.

Field Name	Details
QuestionsCount	Type int Properties Filter, Group, Nillable, Sort Description The number of Question records posted by the User.
QuestionSubscrCount	Type int Properties Filter, Group, Nillable, Sort Description The number of Question records the User has selected to follow.
QuestionSubscrReceivedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of users following Question records posted by the User.
QuestionUpVotesCount	Type int Properties Filter, Group, Nillable, Sort Description The number of up votes the User has marked on Question records posted by other users.
QuestionUpVotesReceivedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of up votes the User has received from other users on the Question records he or she has posted.
RepliesCount	Type int

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description The number of Reply records posted by the User.
ReplyDownVotesCount	Type int Properties Filter, Group, Nillable, Sort Description The number of down votes the User has marked on Reply records posted by other users.
ReplyDownVotesReceivedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of down votes the User has received from other users on the Reply records he or she has posted.
ReplyUpVotesCount	Type int Properties Filter, Group, Nillable, Sort Description The number of up votes the User has marked on the Reply records posted by other users.
ReplyUpVotesReceivedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of up votes the User has received from other users on the Reply records he or she has posted.
ReportAbuseOnQuestionsCount	Type int

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description The number of abuses that the User has reported on Question records posted by other users.
ReportAbuseOnRepliesCount	Type int Properties Filter, Group, Nillable, Sort Description The number of abuses that the User has reported on Reply records posted by other users.
ReportAbuseReceivedOnQnCount	Type int Properties Filter, Group, Nillable, Sort Description The number of abuses reported by other users on the Question records posted by the User.
ReportAbuseReceivedOnReCount	Type int Properties Filter, Group, Nillable, Sort Description the number of abuses reported by other users on the Reply records posted by the User.
UserId	Type reference Properties Filter, Group, Nillable, Sort Description The User ID associated with this reputation.
CommunityId	Type reference

Field Name	Details
	Properties Filter, Group, Nillable, Sort
	Description The ID for the zone associated with this reputation.

Usage

Use this object to view metrics on User activity in Chatter Answers. For example, you can use the ChatterAnswersActivity object to view the number of Question records a user is following in Chatter Answers zones.

SEE ALSO:

[Question](#)

[Reply](#)

[User](#)

ChatterAnswersReputationLevel

Represents a reputation level within a Chatter Answers zone. This object is available in API version 26.0 and later.



Note: With the Spring '18 release, Salesforce no longer supports Chatter Answers. Users of Chatter Answers can post, answer, comment, or view existing Chatter Answers data, but support and updates are scheduled to end. We recommend transitioning to Chatter Questions. For more information, see [End of Support for Chatter Answers in Spring '18](#).

Supported Calls

`create()`, `delete()`, `query()`, `retrieve()`, `update()`

Fields

Field	Details
CommunityID	Type reference Properties Create, Filter, Group, Sort Description ID of the zone for which you're creating the reputation level.
Name	Type string

Field	Details
	Properties Create, Filter, Group, Sort, Update Description Name of the reputation level.
Value	Type int Properties Create, Filter, Group, Sort, Update Description Minimum number of points for this level.

Usage

Use to create or edit reputation levels for the zone.

ChatterConversation

Represents a private conversation in Chatter, consisting of messages that conversation members have sent or received. This object is available in API version 23.0 and later.

Supported Calls

`describeObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
Id	Type ID Properties Defaulted on create, Filter, Group, Sort Description ID of the conversation.

Usage

Use this object to identify private conversations in Chatter. Users can access this object if they have the Manage Chatter Messages and Direct Messages permission. This object is read-only via the API and is provided only to allow administrators to view users' Chatter messages; for example, for compliance purposes.

SEE ALSO:

- [ChatterConversationMember](#)
- [ChatterMessage](#)

ChatterConversationMember

Represents a member of a private conversation in Chatter. A member has either sent messages to or received messages from other conversation participants. This object is available in API version 23.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
ConversationId	Type reference Properties Filter, Group, Sort Description ID of the associated ChatterConversation.
MemberId	Type reference Properties Filter, Group, Sort Description ID of the conversation member.

Usage

Use this object to view members of private conversations in Chatter. Users can access this object if they have the Manage Chatter Messages and Direct Messages permission. This object is read-only via the API and is provided only to allow administrators to view users' Chatter messages; for example, for compliance purposes.

SEE ALSO:

- [ChatterConversation](#)
- [ChatterMessage](#)

ChatterExtension

Represents a Rich Publisher App that's integrated with the Chatter publisher. This object is available in API version 41.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
CompositionComponentEnumOrId	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The ID of the composition component for the Rich Publisher App. This field requires a value.
Description	Type string Properties Create, Filter, Group, Sort, Update Description The description of your custom Rich Publisher App. This field requires a value.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The name of the developer who is responsible for the app.

Field	Details
	 Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
ExtensionName	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of your extension. This field requires a value.
HeaderText	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The text to show in the header of your app composer. Header text is required for Lightning type extensions.
HoverText	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The text to show when a user mouses over your extension's icon. Mouse-over text is required for Lightning type extensions.
IconId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The icon to show in the Chatter publisher. Use an existing file asset ID from your org. This field requires a value. This is a relationship field. Relationship Name Icon Relationship Type Lookup Refers To ContentAsset

Field	Details
IsProtected	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description An auto-generated value. It currently has no impact.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language used for this instance of the <code>ChatterExtension</code>. This field requires a value.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The master label for the <code>ChatterExtension</code> object. This field requires a value.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The prefix to use for the extension's namespace.
RenderComponentEnumOrId	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The rendering component of the Rich Publisher App that you provide. It's comprised of the <code>lightning:availableForChatterExtensionRenderer</code> interface. This field requires a value.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description Describes the type of the extension. Currently, the only value supported is <i>Lightning</i> . Included to allow for other possible types in the future.

ChatterExtensionConfig

Configuration for the Chatter extension for Experience Cloud sites. This object is available in API version 41.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
CanCreate	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether the <code>ChatterExtension</code> can create an instance that appears by rendering.
CanRead	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether the <code>ChatterExtension</code> can be viewed.
ChatterExtensionId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the <code>ChatterExtension</code> . This is a relationship field. Relationship Name ChatterExtension

Field	Details
	Relationship Type Lookup Refers To ChatterExtension
NetworkId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the Experience Cloud site where the ChatterExtension is deployed.
Position	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The position of the ChatterExtension icon in the Chatter publisher.

ChatterMessage

Represents a message sent as part of a private conversation in Chatter. This object is available in API version 23.0 and later.

Supported Calls

`delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`

Fields

Field Name	Details
Body	Type textarea Properties Update Description Text of the message.
ConversationId	Type reference

Field Name	Details
	Properties Filter, Group, Sort
	Description ID of the conversation that the message is associated with.
SenderId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description ID of the sender.
SenderNetworkId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description ID of the Experience Cloud site from which the message was sent. This field is available only if digital experiences is enabled in your org. This field is available in API version 32.0 and later.
SentDate	Type dateTime
	Properties Filter, Sort
	Description Date the message was sent.

Usage

Use this object to view and delete messages sent or received via private conversations in Chatter. Users can access this object if they have the Manage Chatter Messages and Direct Messages permission. Users with the Moderate Experiences Chatter Messages permission can access this object in Experience Cloud sites they're a member of, only if the message has been flagged as inappropriate. This object is provided to allow administrators to view and delete users' Chatter messages, for example, for compliance purposes.

Messages are hard deleted. That is, they're removed completely without a trip to the Recycle Bin.

Deleting a message that resulted from sharing a file with someone doesn't also delete the file.

SEE ALSO:

[ChatterConversation](#)

[ChatterConversationMember](#)

ClientBrowser

Represents a cookie added to the browser upon login, and also includes information about the browser application where the cookie was inserted. This object is available in version 28.0 and later.

Supported Calls

`describeSObjects()`, `delete()`, `query()`, `retrieve()`

Fields

Field	Details
FullUserAgent	Type string Properties Filter, Nillable, Sort Description Detailed information about the client (browser). For example, <code>Mozilla/5.0 (Windows; U; Windows NT 5.1; en-US; rv:1.9.0.1) Gecko/2008070208 Firefox/3.0.1</code>
LastUpdate	Type dateTime Properties Filter, Nillable, Sort Description Represents the last time the cookie was changed.
ProxyInfo	Type string Properties Filter, Nillable, Sort Description The browser's current proxy information.
UsersId	Type reference Properties Filter, Group, Sort Description The ID of the user associated with this item. This is a relationship field.

Field	Details
	Relationship Name Users
	Relationship Type Lookup
	Refers To User

Usage

At every login, the device the login request is from is checked against the known devices using ClientBrowser. A match means a cookie was found on the browser that matches an entry in the ClientBrowser table, so the device is known. No match means that no matching cookie was found, so the device is unknown, and the user is asked to confirm their identity.

CollaborationGroup

Represents a Chatter group. This object is available in API version 19.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

The visibility of information in groups depends on the type of group and the user's permissions.

- **Members:** Any user with the Create and Own New Chatter Groups permission can create public, private, and unlisted groups, including in any Experience Cloud sites they belong to.
- **Owners and managers:** Users can modify group details for any group they own or manage. Owners can also delete groups they own.
- **Nonmembers:** These user permissions allow group access regardless of group membership.
 - View All Data—Allows users to view all public and private groups across their org and its Experience Cloud sites. Users with this permission can't view unlisted group information, unless they have the Modify Unlisted Groups permission as well.
 - Modify All Data—Allows users to view, modify, and delete all public and private groups across their org and its Experience Cloud sites. Users with this permission can't view or modify unlisted group information, unless they have the Manage Unlisted Groups permission as well.
 - Create and Set Up Experiences—Allows users to view, modify, and delete all public and private groups in Experience Cloud sites.
 - Manage Unlisted Groups—Allows users to search for, access, and modify any unlisted group in an org and its Experience Cloud sites.
 - Data Export—Allows users to export any data from Salesforce, including private and unlisted group data from an org and its Experience Cloud sites.

- **Apex and Visualforce:** Apex code runs in system mode, which means that the permissions of the current user aren't taken into account.
 - Visualforce pages that display groups might expose unlisted or private group data to users who aren't members.
 - Because system mode disregards the user's permissions, all users who are accessing a Visualforce page that's showing a group can act as an owner of that group.
 - AppExchange apps that are written in Apex and that access all groups will expose unlisted groups to users who aren't members.

To limit and manage access to the unlisted and private groups in your org:

- Explicitly filter out unlisted and private group information from SOQL queries in all Apex code.
- Use permission sets, profile-level permissions, and sharing checks in your code to further limit group access.
- Use Apex triggers on the CollaborationGroup object to monitor and manage the creation of groups. In Setup, enter *Group Triggers* in the **Quick Find** box, then select **Group Triggers** to add triggers.

Fields

Field	Details
AnnouncementId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Contains the ID of the Announcement last associated with the group. This field is available in API version 30.0 and later. This is a relationship field. Relationship Name Announcement Relationship Type Lookup Refers To Announcement
BannerPhotoUrl	Type url Properties Filter, Nillable, Sort Description The URL for the group's banner photo. The URL is updated every time a photo is uploaded and reflects the most recent photo. If a newer photo has been uploaded, the URL returned for an older photo is not guaranteed to return a photo. Query this field for the URL of the most recent photo. This field is available in API version 36.0 and later.

Field	Details
CanHaveGuests	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If set to <code>true</code>, indicates that a group allows customers. Chatter customers are people outside your company's email domains. Customers can see only the groups they're invited to. They can interact only with members of those groups. Customers can't see any Salesforce information. This field is available starting in API version 23.0, but groups that allow customers are accessible from earlier API versions. However, when accessed from earlier API versions, groups that allow customers aren't distinguishable from private groups. We strongly recommend that you upgrade to the latest API version. If you must use an earlier version, name groups that allow customers to indicate that they include customers.
CollaborationType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of Chatter group. Available values are: • Public—Anyone can see and post updates. Anyone can join a public group. • Private—Only members can see the group feed and post updates. Non-members can only see the group name and a few other details in list views, search, and on the group page. The group's owner or managers must add members who request to join the group. • Unlisted—Only members and users with the Manage Unlisted Groups permission can see the group and post updates. Other users can't access the group or see it in lists, search, and feeds.
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Description of the group.
FullPhotoUrl	Type url Properties Filter, Nillable, Sort

Field	Details
	Description The URL for the group's profile photo. The URL is updated every time a photo is uploaded and reflects the most recent photo. If a newer photo has been uploaded, the URL returned for an older photo is not guaranteed to return a photo. Query this field for the URL of the most recent photo. This field is available in API version 20.0 and later.
GroupEmail	Type email Properties Nillable, Sort Description The email address for posting to the group. For private groups, only visible to members and users with Modify All Data or View All Data permissions. This field is available in API version 29.0 and later.
HasPrivateFieldsAccess	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If set to <code>true</code>, indicates that a user can see the <code>InformationBody</code> and <code>InformationTitle</code> fields in a private group. This field is set to <code>true</code> for members of a private group and users with Modify All Data or View All Data permissions.
InformationBody	Type textarea Properties Create, Nillable, Update Description The text of the Information section. For private groups, only visible to members and users with Modify All Data or View All Data permissions.
InformationTitle	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The title of the Information section. For private groups, only visible to members and users with Modify All Data or View All Data permissions.

Field	Details
IsArchived	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the group is archived (<code>true</code>) or not (<code>false</code>). This field is available in API version 28.0 and later.
IsAutoArchiveDisabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether automatic archiving is disabled for the group (<code>true</code>) or not (<code>false</code>). This field is available in API version 29.0 and later.
IsBroadcast	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the group is a broadcast group (<code>true</code>) or not (<code>false</code>). This field is available in API version 36.0 and later.
LastFeedModifiedDate	Type dateTime Properties Filter, Sort Description The date of the last post or comment on the group.
LastReferencedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type datetime

Field	Details
	Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (<code>LastReferencedDate</code>) and not viewed.
MediumPhotoUrl	Type url Properties Filter, Nillable, Sort Description The URL for the larger, cropped photo size.
MemberCount	Type int Properties Filter, Group, Nillable, Sort Description The number of members in the group.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the group. Group names must be unique across public and private groups. Unlisted groups don't require unique names.
NetworkId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the Experience Cloud site that this group is part of. This field is available only if digital experiences is enabled in your org. You can only add a <code>NetworkId</code> when creating a group. You can't change or add a <code>NetworkId</code> for an existing group. This field is available in API version 26.0 and later.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description ID of the owner of the group. Only the current group owner or people with the Modify All Data permission can update the <code>OwnerId</code>. This is a relationship field. Relationship Name Owner Relationship Type Lookup Refers To User
SmallImageUrl	Type url Properties Filter, Nillable, Sort Description The URL for a thumbnail of the group's profile photo. The URL is updated every time a photo is uploaded and reflects the most recent photo. If a newer photo has been uploaded, the URL returned for an older photo is not guaranteed to return a photo. Query this field for the URL of the most recent photo. This field is available in API version 20.0 and later.

Usage

Use this object to create, edit, or delete groups in an org or Experience Cloud site. Deleting a group permanently deletes all posts and comments to the group. It also deletes all files and links posted to the group and removes the files from other locations where they were shared.

As a Chatter group member, you can post to the group using the CollaborationGroupFeed object. As a Chatter group owner or manager, you can add or remove group members using the CollaborationGroupMember object, post announcements to the group using the Announcement object, and accept or decline requests to join private groups using the CollaborationGroupMemberRequest object. Additionally, the group owner, manager, or your Salesforce system administrator can invite people to join the group using the [CollaborationInvitation](#) object.

The Salesforce system administrator doesn't need to be a member of the group in order to send invitations using the API.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

CollaborationGroupFeed

Feed tracking is available for the object.

SEE ALSO:

[CollaborationGroupMember](#)

[CollaborationGroupMemberRequest](#)

CollaborationGroupMember

Represents a member of a Chatter group. This object is available in API version 19.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `describeLayout()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
CollaborationGroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the associated CollaborationGroup. This is a relationship field. Relationship Name CollaborationGroup Relationship Type Lookup Refers To CollaborationGroup
CollaborationRole	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The role of a group member. Group owners and managers can change roles for members of their groups. The valid values are:

Field	Details
	• Standard—Indicates that a user is a group member. Members can post and comment in the group. • Admin—Indicates that a user is a group manager. Managers can post and comment, change member roles, edit group settings, add and remove members, delete posts and comments, and edit the group information field.  Note: To change the group owner, use the <code>OwnerId</code> field on the <code>CollaborationGroup</code> object.
<code>LastFeedAccessDate</code>	Type dateTime Properties Filter, Nillable, Sort Description Date and time when a group member last accessed the group’s feed. The value is only updated when a member explicitly consumes the group’s feed, not when the member sees group posts in other feeds, like the profile feed.
<code>MemberId</code>	Type reference Properties Create, Filter, Group, Sort Description ID of the group member. This is a relationship field. Relationship Name Member Relationship Type Lookup Refers To User
<code>NotificationFrequency</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Required. The frequency at which Salesforce sends Chatter group email digests to this member. Can only be set by the member or users with the “Modify All Data” permission. The valid values are: • <code>D</code>—Daily • <code>W</code>—Weekly

Field	Details
	- N—Never - P—On every post The default value is specified by the member in their Chatter email settings. In communities, the <code>Email on every post</code> option is disabled once more than 10,000 members choose this setting for the group. All members who had this option selected are automatically switched to <code>Daily digests</code>.

Usage

Use this object to view, create, and delete Chatter group members. You must be a group owner or manager to create members for private Chatter groups.

SEE ALSO:

- [CollaborationGroup](#)
- [CollaborationGroupMemberRequest](#)

CollaborationGroupMemberRequest

Represents a request to join a private Chatter group. This object is available in API version 21.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
CollaborationGroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the private Chatter group. This is a relationship field. Relationship Name CollaborationGroup Relationship Type Lookup

Field	Details
	Refers To CollaborationGroup
RequesterId	Type reference Properties Create, Filter, Group, Sort Description ID of the user requesting to join the group; must be the ID of the context user. This is a relationship field. Relationship Name Requester Relationship Type Lookup Refers To User
ResponseMessage	Type string Properties Filter, Group, Nillable, Sort, Update Description Optional message to be included in the notification email when <code>Status</code> is <code>Declined</code> .
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort, Update Description The status of the request. Available values are: - Accepted - Declined - Pending

Usage

This object represents a request to join a private Chatter group, and can be used to accept or decline requests to join private groups you own or manage. On create, an email is sent to the owner and managers of the private group to be accepted or declined. When the `Status` is `Accepted` or `Declined`, an email is sent to notify the requester. When the `Status` is `Declined`, a `ResponseMessage` is optionally included to provide additional details.

Note the following when working with requests:

- Users with the “Modify All Data” or “View All Data” permission can view records for all groups, regardless of membership.
- A user can be a member of 300 groups. Requests to join groups count against this limit.
- `Status` can't be specified on create.
- You can only update a request when the `Status` is `Pending`.
- You can't delete or update a request with a `Status` of `Accepted` or `Declined`.

SEE ALSO:

[CollaborationGroup](#)

[CollaborationGroupMember](#)

CollaborationGroupRecord

Represents the records associated with Chatter groups.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
<code>CollaborationGroupId</code>	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the Chatter group. This is a relationship field. Relationship Name CollaborationGroup Relationship Type Lookup Refers To CollaborationGroup
<code>NetworkId</code>	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description Optional. The ID of the Experience Cloud site that the group belongs to. Available from API version 34.0.
RecordId	Type reference Properties Create, Filter, Group, Sort Description Required. The ID of the record associated with the Chatter group. This is a polymorphic relationship field. Relationship Name Record Relationship Type Lookup Refers To Account, Campaign, Case, Contact, Contract, Lead, Opportunity

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[CollaborationGroupRecordChangeEvent](#) (API version 62.0)

Change events are available for the object.

CollaborationInvitation

Represents an invitation to join Chatter, either directly or through a group. This object is available in API version 21.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Invitations are available if "Allow Invitations" is enabled for your organization.

Invitations are limited to your allowed domain(s) unless the invite is sent from a private group that allows customers. Allowed domains are set by the administrator.

Invitations to customers are available if "Allow Customer Invitations" is enabled for your organization. Users must have the "Invite Customers to Chatter" permission to send invitations to people outside their Chatter domain.

Fields

Field	Details
InvitedUserEmail	Type string Properties Create, Filter, Group, Sort Description The email address for the user invited to join Chatter. Label is <code>Invited Email</code>.
InvitedUserEmailNormalized	Type email Properties Filter, Group, Sort Description A normalized version of the <code>InvitedUserEmail</code> entered. Label is <code>Invited Email (Normalized)</code>.
InviterId	Type reference Properties Filter, Group, Sort Description The person that initiated the invitation.
OptionalMessage	Type string Properties Create, Filter, Group, Nillable, Sort Description An optional message from the person sending the invitation to the person receiving it.
ParentId	Type reference Properties Filter, Group, Nillable, Sort Description Used when the email address on the invitation is different than the one entered when the invitee accepts the invitation.
SharedEntityId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort
	Description ID of the user or group associated with this invitation. • If the invitation is to join Chatter, the <code>SharedEntityId</code> is the ID of the User that created the invitation. The invitee will auto-follow the inviter. • If the invitation is to join a group within Chatter, the <code>SharedEntityId</code> is the ID of the Chatter CollaborationGroup. • To invite a customer, set <code>SharedEntityId</code> to the ID of the private CollaborationGroup with Allow Customers turned on.
Status	Type picklist
	Properties Filter, Group, Restricted picklist, Sort
	Description The status of the invitation. Possible values are: • Sent • Accepted • Canceled

Usage

Use this object to create or delete (cancel) invitations to join Chatter. You can either invite a user to join Chatter directly or as part of a CollaborationGroup.

 **Note:** To invite someone to join a CollaborationGroup, you must be either the owner or a manager of the group or a Salesforce system administrator.

The Salesforce system administrator doesn't need to be a member of the group in order to send invitations using the API.

When the person accepts your CollaborationGroup invitation, they join the CollaborationGroup and Chatter as well.

 **Note:** You can't send invitations to users of the organization the invite was sent from.

Invited users can view profiles, post on their feed, and join groups, but they can't see your Salesforce data or records.

If your organization allows groups with customers, owners and managers of private groups with the "Allow Customers" setting, as well as system administrators, can use this object to invite customers.

Java Samples

The following example shows how to send an invitation to join Chatter:

```
public void invitePeople(String inviterUserId, String invitedEmail) throws Exception {
    CollaborationInvitation invitation = new CollaborationInvitation();
```

```

invitation.setSharedEntityId(inviterUserId);//pass the userId of the inviter
invitation.setInvitedUserEmail(invitedEmail);//email of the invited user
insert(invitation);
}

```

The following example shows how to send an invitation to a customer user from a group that allows customers:

```

public void inviteToGroup(String groupName, String invitedEmail) throws Exception {
    QueryResult qr = query("select id from collaborationgroup where name = '" +
        groupName); //pass the group name
    String groupId = qr.getRecords()[0].getId();
    CollaborationInvitation invitation = new CollaborationInvitation();
    invitation.setSharedEntityId(groupId);//pass the groupId
    invitation.setInvitedUserEmail(invitedEmail);//email of the invited user
    insert(invitation);
}

```

Apex Samples

```

String emailAddress = 'bob@external.com';
CollaborationGroup chatterGroup = [SELECT Id
    FROM CollaborationGroup
    WHERE Name='All acme.com'
    LIMIT 1];
CollaborationInvitation inv = New CollaborationInvitation();
inv.SharedEntityId = chatterGroup.id;
inv.InvitedUserEmail = emailAddress;

try {
    Insert inv;
} catch(DMLException e) {
    System.debug('There was an error with the invite: '+e);
}

```

CollaborationRoom

Represents a collaboration room, which links Salesforce to a Slack channel used by applications with specific use cases, such as swarming or reporting. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

To access this object, enable the Slack Terms of Service and one of:

- Sales Cloud for Slack App
- Service Cloud for Slack App

- CRM Analytics for Slack App
- Industries Cloud for Slack App
- Health Cloud for Slack App

Fields

Field	Details
IsArchived	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether the collaboration room is archived (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
IsAutoJoin	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether new users automatically join the collaboration room. Used for Sales Cloud for Slack App. The default value is <code>false</code>.
IsExternal	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether external users are members of the Slack channel (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description Timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of collaboration room.
PlatformKey	Type string Properties Create, Filter, Group, Nillable, Sort Description ID of the Slack channel.
TeamKey	Type string Properties Create, Filter, Group, Nillable, Sort Description ID of the Slack workspace.

CollabDocumentMetric

Represents the engagement metrics for a Quip thread (document or spreadsheet) that's linked to a Salesforce record. This object is available in API version 50.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
Document	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The Quip thread ID.
Site	Type string Properties Filter, Group, Nillable, Sort Description The ID of the Quip site in which the thread is located.
SourceTemplate	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The ID of the template (if any) on which a Quip thread is based.
DocumentTitle	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The title of the thread.
MetricDate	Type dateTime Properties Filter, Nillable, Sort Description The date that the metric was gathered in your local time zone.
MetricDateOnly	Type date Properties Filter, Nillable, Sort

Field	Details
	Description The date that the metric was gathered in UTC. Available in API version 55.0 and later.
LastUpdatedDate	Type dateTime Properties Filter, Nillable, Sort Description The date that the thread was created, last edited, or last shared in your local time zone.
LastUpdatedDateOnly	Type date Properties Filter, Nillable, Sort Description The date that the thread was created, last edited, or last shared in UTC. Available in API version 55.0 and later.
ViewerCount	Type int Properties Filter, Nillable, Sort Description The number of thread views by user for the specified MetricDate.
UpdateCount	Type int Properties Filter, Group, Nillable, Sort Description The number of edits made on the thread on a given day.
EditorCount	Type int Properties Filter, Group, Nillable, Sort Description For the specified MetricDate, the number of users who edited the Quip thread.
CommenterCount	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort
	Description For the specified MetricDate, the number of users who commented on the Quip thread.

CollabDocumentMetricRecord

Represents an association between a CollabDocumentMetric and a Salesforce record. It tracks which Salesforce record, such as an Account or Contact, is linked to a Quip thread for which metrics were gathered using CollabDocumentMetric. CollabDocumentMetricRecord is available in API version 50.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
ParentRecord	Type reference
	Properties Filter, Group, Nillable, Sort
	Description The ID of the Salesforce record.
QuipDocumentMetric	Type reference
	Properties Filter, Group, Nillable, Sort
	Description The ID of the CollabDocumentMetric record.
MetricDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The date that the metric was gathered in your local time zone.

Field	Details
MetricDateOnly	Type date Properties Filter, Nillable, Sort Description The date that the metric was gathered in UTC. Available in API version 55.0 and later.
EntityType	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The object type of the Salesforce record, such as Account or Contact.

CollabTemplateMetric

Represents the engagement metrics for a Quip template. This object is available in API version 50.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
Template	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The ID of the template.
TemplateTitle	Type string Properties Filter, Group, Nillable, Sort Description The title of the template.

Field	Details
Site	Type string Properties Filter, Group, Nillable, Sort Description The ID of the Quip site on which the template is available.
MetricDate	Type dateTime Properties Filter, Nillable, Sort Description The date that the metric was gathered in your local time zone.
MetricDateOnly	Type date Properties Filter, Nillable, Sort Description The date that the metric was gathered in UTC. Available in API version 55.0 and later.
LastUpdatedDate	Type dateTime Properties Filter, Nillable, Sort Description The date that the thread was created, last edited, or last shared in your local time zone.
LastUpdatedDateOnly	Type date Properties Filter, Nillable, Sort Description The date that the thread was created, last edited, or last shared in UTC. Available in API version 55.0 and later.
TotalDocumentCount	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of documents created based on the template.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[CollabTemplateMetricChangeEvent](#) (API version 62.0)

Change events are available for the object.

CollabTemplateMetricRecord

Represents an association between a CollabTemplateMetric and a Salesforce record. It tracks which Salesforce record, such as an Account or Contact, is linked to a Quip template for which metrics were gathered using CollabTemplateMetric. CollabTemplateMetricRecord is available in API version 50.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
ParentRecord	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the Salesforce record.
QuipDocumentMetric	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the CollabTemplateMetric record.
MetricDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The date that the metric was gathered in your local time zone.
MetricDateOnly	Type date Properties Filter, Nillable, Sort Description The date that the metric was gathered in UTC. Available in API version 55.0 and later.
EntityType	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The object type of the Salesforce record, such as Account or Contact.

CollabUserEngagementMetric

Represents the user engagement metrics for a Quip thread in a Quip template or document. This object is available in API version 50.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
CommentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of comments by the user for the specified <code>MetricDate</code> .

Field	Details
EditCount	Type int Properties Filter, Group, Nillable, Sort Description The number of edits by the user for the specified MetricDate.
MetricDate	Type dateTime Properties Filter, Nillable, Sort Description The date that the metric was gathered in your local time zone.
MetricDateOnly	Type date Properties Filter, Nillable, Sort Description The date that the metric was gathered in UTC. Available in API version 55.0 and later.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The unique name of the CollabUserEngagementMetric object.
QuipThread	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The Quip thread ID.
QuipThreadTitle	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The title of the Quip document, sheet, slide, and so forth.

Field	Details
QuipThreadType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of Quip thread. The possible values are: • CHAT • DOCUMENT • SHEET • SLIDE • TEMPLATE
QuipUser	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The ID of the Quip user.
SalesforceUserId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the Salesforce user.
Site	Type string Properties Filter, Group, Nillable, Sort Description The ID of the Quip site.
SourceTemplate	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The ID of the source template.

Field	Details
ViewCount	Type int Properties Filter, Group, Nillable, Sort Description The number of views by the user for the specified <code>MetricDate</code> .

CollabUserEngmtRecordLink

Represents an association between a `CollabUserEngagementMetric` and a Salesforce record. It tracks which Salesforce record, such as an Account or Contact, is associated with the user engagement metric. This object is available in API version 50.0 and later.



Note: The `CollabUserEngmtRecordLink` object is now deprecated. You can still access user engagement metrics for metric dates before August 12, 2021. To obtain user engagement metric for dates starting from August 12, 2021, follow the instructions in the [Quip Engagement Metrics documentation](#).

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
MetricDate	Type dateTime Properties Filter, Nillable, Sort Description The date of the gathered metric.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The unique name of the <code>CollabUserEngmtRecordLink</code> object.
ObjectType	Type string

Field	Details
	Properties Filter, Group, idLookup, Nillable, Sort Description The object type of the Salesforce record, such as Account or Contact.
ParentRecordId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the Salesforce record.
UserEngagementMetricId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the CollabUserEngagementMetric record.

ColorDefinition

Represents the color-related metadata for a custom tab. This object is available in API version 43.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Fields

Field Name	Details
Color	Type string Properties Filter, Group, Nillable, Sort Description The color described in web color RGB format—for example, “00FF00”.
Context	Type string

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description The color context, which determines whether the color is the main color (or primary) for the tab.
DurableId	Type string Properties Filter, Group, Nillable, Sort Description A unique virtual Salesforce ID for the color.
TabDefinitionId	Type string Properties Filter, Nillable, Sort Description The TabDefinition ID. This is a relationship field. Relationship Name TabDefinition Relationship Type Lookup Refers To TabDefinition
Theme	Type string Properties Filter, Group, Nillable, Sort Description The icon's theme.

ContCalloutSummaryEventLog

Continuation Callout Summary events contain information about all of the asynchronous callouts performed during a transaction, their response status codes, execution times, and URL endpoint destinations. This object is available in API version 65.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
ContinuationIdentifier	Type string Properties Filter, Group, Nillable, Sort Description A unique ID identifying a sequence of events within a request.
Duration	Type double Properties Filter, Nillable, Sort Description Total duration of continuation, in milliseconds.
IsSuccess	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the continuation was successful or not.
OriginRequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the request that initiated a callout.
RequestFormSize	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description Continuation request form size, in bytes. Depending on how many HTTP requests were used in a continuation, this field can contain up to three space-separated values.
RequestIdIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.
ResponseSize	Type string Properties Filter, Group, Nillable, Sort Description The size of the callout response, in bytes. Depending on how many HTTP requests were used in a continuation, this field can contain up to three space-separated values.
StatusCode	Type int Properties Filter, Group, Nillable, Sort Description The HTTP status or internal code returned by the remote endpoint. A status code of 200 indicates that the request was successful. Other status code values indicate the type of problem that was encountered. Depending on how many HTTP requests were used in a continuation, this field can contain up to three space-separated values.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 20130715233322.670.
Url	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The callout endpoint URL. Depending on how many HTTP requests were used in a continuation, this field can contain up to three space-separated values.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 005300000009M943.
VisualforceControllerSize	Type string Properties Filter, Group, Nillable, Sort Description Continuation Visualforce controller size, in bytes. Depending on how many HTTP requests were used in a continuation, this field can contain up to three space-separated values.

CombinedAttachment

This read-only object contains all notes, attachments, Google Docs, documents uploaded to libraries in Salesforce CRM content, and files added to Chatter that are associated with a record.

Supported Calls

`describeSObjects()`

Fields

Field Name	Details
ContentSize	Type int Properties Filter, Group, Nillable, Sort Description The size of the document in bytes for documents smaller than 2 GB.

Field Name	Details
	In API version 66.0 and later, we recommend that you use the <code>ContentSizeLong</code> field even for documents smaller than 2 GB.
<code>ContentSizeLong</code>	Type long Properties Filter, Group, Nillable, Sort Description The size of the document in bytes up to 10 GB. This field is available in API version 66.0 and later.
<code>ContentUrl</code>	Type url Properties Filter, Group, Nillable, Sort Description URL for links and Google Docs. This field is set only for links and Google Docs, and is one of the fields that determine the <code>FileType</code>. This field is available in API version 31.0 and later.
<code>ExternalDataSourceName</code>	Type string Properties Filter, Group, Nillable, Sort Description The name of the external data source in which the document is stored. This field is set only for external documents that are connected to Salesforce. This field is available in API version 32.0 and later.
<code>ExternalDataSourceType</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Type of external data source in which the document is stored. This field is set only for external documents that are connected to Salesforce. This field is available in API version 35.0 and later.
<code>FileExtension</code>	Type string

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description File extension of the document. This field is available in API version 31.0 and later.
FileType	Type string Properties Filter, Group, Nillable, Sort Description Type of document, which is determined by the file extension.
ParentId	Type reference Properties Filter, Group, Sort Description The ID of the parent object. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To Account, Accreditation, ActivationTarget, ActivationTrgtIntOrgAccess, ApiAnomalyEventStore, AssessmentIndicatorDefinition, AssessmentTask, AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskIndDefinition, AssessmentTaskOrder, Asset, AssetRelationship, AssignedResource, Award, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, Campaign, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis, CareInterventionType, CareMetricTarget, CareObservation, CareObservationComponent, CarePgmProvHealthcareProvider, CarePreauth, CarePreauthItem, CareProgram, CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee, CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider, CareProgramTeamMember, CareProviderAdverseAction, CareProviderFacilitySpecialty, CareProviderSearchableField, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareSpecialtyTaxonomy, CareTaxonomy, Case, CodeSet, CollaborationGroup, CommSubscription, CommSubscriptionChannelType, CommSubscriptionConsent,

Field Name	Details
	CommSubscriptionTiming, ConsumptionSchedule, Contact, ContactEncounter, ContactEncounterParticipant, ContentWorkspace, Contract, ConversationEntry, CoverageBenefit, CoverageBenefitItem, CredentialStuffingEventStore, CreditMemo, CreditMemoLine, Dashboard, DashboardComponent, DataStream, DelegatedAccount, DocumentChecklistItem, EmailMessage, EmailTemplate, EngagementChannelType, EnhancedLetterhead, EnrollmentEligibilityCriteria, Event, HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, Identifier, IdentityDocument, Image, IndividualApplication, Invoice, InvoiceLine, Lead, ListEmail, Location, MarketSegment, MarketSegmentActivation, MemberPlan, MessagingSession, MktCalculatedInsight, OperatingHours, Opportunity, Order, OrderItem, Organization, OtherComponentTask, PartyConsent, PersonEducation, PersonLanguage, PersonLifeEvent, PersonName, PlanBenefit, PlanBenefitItem, Product2, ProductFulfillmentLocation, ProductItem, ProductItemTransaction, ProductRequest, ProductRequestLineItem, ProductRequired, ProductTransfer, ProfileSkill, ProfileSkillEndorsement, ProfileSkillUser, ProviderSearchSyncLog, PurchaserPlan, PurchaserPlanAssn, ReceivedDocument, Report, ReportAnomalyEventStore, ResourceAbsence, ResourcePreference, ReturnOrder, ReturnOrderLineItem, ServiceAppointment, ServiceResource, ServiceResourceSkill, ServiceTerritory, ServiceTerritoryMember, ServiceTerritoryWorkType, SessionHijackingEventStore, Shift, Shipment, ShipmentItem, Site, SkillRequirement, SocialPost, Solution, Task, ThreatDetectionFeedback, User, Visit, VisitedParty, Visitor, VoiceCall, VolunteerProject, WorkBadgeDefinition, WorkOrder, WorkOrderLineItem, WorkType, WorkTypeGroup, WorkTypeGroupMember
RecordType	Type string Properties Filter, Group, Nillable, Sort Description The parent object type.
SharingOption	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Controls whether sharing is frozen for a file. Only Salesforce admins and file owners with Collaborator access to the file can modify this field. The default is Allowed, which means that new shares are allowed. When set to Restricted, new shares are prevented without affecting existing shares. This field is available in API versions 35.0 and later.

Field Name	Details
Title	Type string Properties Filter, Group, Nillable, Sort Description Title of the attached file.

Usage

Use this object to list all notes, attachments, documents uploaded to libraries in Salesforce CRM content, and files added to Chatter for a record, such as a related list on a detail page.

To determine if an object supports the CombinedAttachment object, call `describeObject()` on the object. For example, `describeObject('Account')` returns all the child relationships of the Account object, including CombinedAttachment. You can then query the CombinedAttachment child relationship.

```
SELECT Name, (SELECT Title FROM CombinedAttachments)
FROM Account
```

You can't directly query CombinedAttachment.

CommerceEntitlementBuyerGroup

Represents the entitlement policy for a buyer group. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`

Special Access Rules

The CommerceEntitlementBuyerGroup object is available when you meet these requirements. The B2B Commerce license is enabled. The Commerce Buyer and Entitlements Integrator permission is granted.

Fields

Field	Details
BuyerGroupId	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description The unique ID for the buyer group.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort Description The standard code for the currency. Possible values are: • GBP—British Pound • USD—U.S. Dollar
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the entitlement buyer group.
PolicyId	Type reference Properties Create, Filter, Group, Sort Description The unique ID for the entitlement policy.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[CommerceEntitlementBuyerGroupChangeEvent](#) on page 68

Change events are available for the object.

CommerceEntitlementPolicy

Represents an entitlement policy, which determines what products and prices a user can see. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The CommerceEntitlementPolicy object is available only if the B2B Commerce license is enabled.

Fields

Field	Details
CanViewPrice	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether a user can view the price of a product (<code>true</code>) or not (<code>false</code>). Default value is <code>false</code>.
CanViewProduct	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether a user can view the product (<code>true</code>) or not (<code>false</code>). Default value is <code>false</code>.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The standard code for the currency. Possible values are: • GBP—British Pound • USD—U.S. Dollar
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The entitlement policy description.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines if the entitlement policy is active (<code>true</code>) or inactive (<code>false</code>). Default value is <code>false</code> .
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it can mean that the record was only referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the entitlement policy.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The unique ID for the entitlement policy owner.

Associated Objects

This object has the following associated objects. Except where noted, these objects are available in the same API version as CommerceEntitlementPolicy.

CommerceEntitlementPolicyChangeEvent on page 68

Change events are available for the object.

CommerceEntitlementPolicyOwnerFeed on page 55

Feed tracking is available for the object.

CommerceEntitlementPolicyHistory on page 63

History is available for tracked fields of the object.

CommerceEntitlementPolicyOwnerSharingRule

Sharing rules are available for this object.

CommerceEntitlementPolicyShare

Represents the entitlement rule for sharing products and prices with users other than the owner. This object is available in API version 49.0 and later.

You can only create, edit, and delete sharing entries for standard objects whose `RowCause` field is set to `Manual`. Sharing entries for standard objects with different `RowCause` values are created as a result of your Salesforce org's sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren't stored at all.



Note: While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it's possible that we'll stop storing certain share records to improve performance. As a best practice, don't create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

The CommerceEntitlementPolicyShare object is available only if the B2B Commerce license is enabled.

Fields

Field	Details
AccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Possible values are: • All—Owner

Field	Details
	- Edit—Read/Write - Read—Read Only
ParentId	Type reference Properties Create, Filter, Group, Sort Description The unique ID of the parent entitlement policy.
RowCause	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is <code>Manual</code>. If no value is specified, the field defaults to <code>Manual</code>. All other <code>RowCause</code> values are read-only. After the sharing entry is created, this field can't be edited. Possible values are: <code>CompliantCollaboration</code>—Compliant Data Sharing <code>GuestParentImplicit</code>—Associated guest user sharing <code>GuestPersonImplicit</code>—Associated Guest User Sharing <code>GuestRule</code>—Guest User Sharing Rule <code>ImplicitChild</code>—Account Sharing <code>ImplicitParent</code>—Associated record owner or sharing <code>ImplicitPerson</code>—Person Contact <code>Manual</code>—Manual Sharing <code>Owner</code> <code>Rule</code>—Sharing Rule <code>SurveyShare</code>—Survey Sharing Rule <code>Team</code>—Sales Team <code>Territory</code>—Territory Assignment Rule <code>Territory2AssociationManual</code>—Territory Manual <code>Territory2Forecast</code>—Territory assignment for forecasting and reporting <code>TerritoryManual</code>—Territory Manual <code>TerritoryRule</code>—Territory Sharing Rule
UserOrGroupId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort
	Description The unique ID of the associated user or buyer group.

CommerceEntitlementProduct

Represents the entitlement policy for a product. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`

Special Access Rules

The CommerceEntitlementProduct object is available when you meet these requirements. The B2B Commerce license is enabled. The Commerce Buyer and Entitlements Integrator permission is granted.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort Description The standard code for the currency. Possible values are: • GBP—British Pound • USD—U.S. Dollar
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The product entitlement policy name.

Field	Details
PolicyId	Type reference Properties Create, Filter, Group, Sort Description The unique ID for the product entitlement policy.
ProductId	Type reference Properties Create, Filter, Group, Sort Description The unique ID for the product referenced in the entitlement policy.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[CommerceEntitlementProductChangeEvent](#) on page 68

Change events are available for the object.

CommissionSchedule

Represents a commission calculation and rate definition. Calculates commission values for a commissionable event.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ApplicableObject	Type multipicklist Properties Create, Filter, Nillable, Restricted picklist, Update Description The object for which this Commission Schedule calculates commissions.

Field	Details
	Possible values are: - Contract - InsurancePolicy - Producer - Quote
CalcProcessInputMapping	Type textarea Properties Create, Nillable, Update Description The input mappings from the object fields to the variables used in the commission calculation.
CalcProcessOutput	Type textarea Properties Create, Nillable, Update Description The formula applied to this Commission Schedule's process output that calculates the final commission amount.
CalcProcessOutputConvNotation	Type textarea Properties Create, Nillable, Update Description An optimized version of the CalcProcessOutput formula that calculates the commission. Not user-editable.
CalculationProcessName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the Integration Procedure, Calculation Matrix, or Calculation Procedure this Commission Schedule uses for calculations.
CalculationType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description The type of calculation or process used when this Commission Schedule is used. Possible values are: • Amount • CalculationMatrix • CalculationProcedure • IntegrationProcedure • Rate
CommissionAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description The commission amount for the Commission Schedule when the process type is Amount.
CommissionRate	Type percent Properties Create, Filter, Nillable, Sort, Update Description The commission percentage for the Commission Schedule when the process type is Rate.
CommissionStructureType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates whether the commission calculation is Flat or Tiered when the process type is Matrix. Possible values are: • Flat • Tiered The default value is Flat.
EffectiveEndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The effective end date of the Commission Schedule.
EffectiveStartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The effective start date of the Commission Schedule.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the Commission Schedule is active. The default value is <code>false</code> .
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the Commission Schedule.
OwnerId	Type reference

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the record owner. This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
TierDefinition	Type textarea
	Properties Create, Nillable, Update
	Description Internal-only. Applies when the CalculationType is CalculationMatrix.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[CommissionScheduleChangeEvent](#) on page 68

Change events are available for the object in API version 62.0 and later.

[CommissionScheduleFeed](#)

Feed tracking is available for the object.

[CommissionScheduleHistory](#)

History is available for tracked fields of the object.

[CommissionScheduleOwnerSharingRule](#)

Sharing rules are available for the object.

[CommissionScheduleShare](#)

Sharing is available for the object.

CommissionScheduleAssignment

Represents the commission calculation applicable to a specific product or producer for one or multiple commissionable events.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
CommissionableEventType	Type multipicklist Properties Create, Filter, Nillable, Restricted picklist, Update Description The event that results in the commission calculation. Possible values are: - Contracting - Endorsement - Issue Policy - Policy Issuance
CommissionScheduleId	Type reference Properties Create, Filter, Group, Sort Description The ID of the associated Commission Schedule, which is the commission calculation tied to the product or producer. This is a relationship field. Relationship Name CommissionSchedule Relationship Type Lookup Refers To CommissionSchedule
EffectiveEndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The last date when the Commission Schedule is in effect for the product or producer.

Field	Details
EffectiveStartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The first date when the Commission Schedule is in effect for the product or producer.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.
MaxCommissionAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description The maximum commission calculated for the product or producer for a commissionable event. Constrains the output from the Commission Schedule.
MaxCommissionRate	Type percent Properties Create, Filter, Nillable, Sort, Update Description The maximum commission rate that a producer receives for a commissionable event.
MinCommissionAmount	Type currency Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description The minimum commission calculated for the product or producer for a commissionable event. Constrains the output from the Commission Schedule.
MinCommissionRate	Type percent Properties Create, Filter, Nillable, Sort, Update Description The minimum commission rate that a producer receives for a commissionable event.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the Commission Schedule Assignment.
ProducerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The producer, broker, brokerage, or other user who receives the commission. This is a relationship field. Relationship Name Producer Relationship Type Lookup Refers To Producer
Product2Id	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The product for which commissions are calculated. This is a relationship field. Relationship Name Product2

Field	Details
	Relationship Type Lookup
	Refers To Product2

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[CommissionScheduleAssignmentChangeEvent](#) on page 68

Change events are available for the object in API version 62.0 and later.

[CommissionScheduleAssignmentFeed](#)

Feed tracking is available for the object.

[CommissionScheduleAssignmentHistory](#)

History is available for tracked fields of the object.

[CommissionScheduleAssignmentOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[CommissionScheduleAssignmentShare](#) on page 67

Sharing is available for the object.

CommSubscription

Represents the subscription options for a specific communication. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
DataUsePurposeId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description ID of the data use purpose record associated with the communication subscription.

Field	Details
IsDefault	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if this communication subscription is the default (<code>true</code>) or not (<code>false</code>). This field has a default value of <code>false</code>. Only one communication subscription record can be the default.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Name of the communication subscription record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the account owner associated with this customer. This is a polymorphic relationship field. Relationship Name Owner

Field	Details
	Relationship Type Lookup
	Refers To Group, User

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

CommSubscriptionChangeEvent (API version 61.0)

Change events are available for the object.

CommSubscriptionFeed

Feed tracking is available for the object.

CommSubscriptionHistory

History is available for tracked fields of the object.

CommSubscriptionOwnerSharingRule

Sharing rules are available for the object.

CommSubscriptionShare

Sharing is available for the object.

CommSubscriptionChannelType

Represents the engagement channel through which you can reach a customer for a communication subscription. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
CommunicationSubscriptionId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description ID of the associated communication subscription record. This is a relationship field.

Field	Details
	Relationship Name CommunicationSubscription Relationship Type Lookup Refers To CommSubscription
EngagementChannelTypeId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the associated engagement channel type record. This is a relationship field. Relationship Name EngagementChannelType Relationship Type Lookup Refers To EngagementChannelType
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.
MessagingChannelUsageId	Type reference Properties Filter, Group, Sort

Field	Details
	Description The ID of the associated Messaging channel usage record, which is in turn associated with a messaging channel. This is a relationship field. Relationship Name MessagingChannelUsage Relationship Type Lookup Refers To MessagingChannelUsage
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Name of the communication subscription channel type record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID account owner associated with this customer. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[CommSubscriptionChannelTypeChangeEvent](#) (API version 61.0)

Change events are available for the object.

[CommSubscriptionChannelTypeFeed](#)

Feed tracking is available for the object.

CommSubscriptionChannelTypeHistory

History is available for tracked fields of the object.

CommSubscriptionChannelTypeOwnerSharingRule

Sharing rules are available for the object.

CommSubscriptionChannelTypeShare

Sharing is available for the object.

CommSubscriptionConsent

Represents a customer's consent to a communication subscription. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

With certain page layout and field-level security settings, some fields aren't visible or editable.

Field	Details
BusinessBrandId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the Business Brand that the individual has given consent to for a communication subscription. This is a relationship field. This field is available in API version 53.0 and later. Relationship Name BusinessBrand Relationship Type Lookup Refers To BusinessBrand
CommSubscriptionChannelTypeId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the associated communication subscription channel type record. This is a relationship field.

Field	Details
	Relationship Name CommSubscriptionChannelType Relationship Type Lookup Refers To CommSubscriptionChannelType
ConsentCapturedDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Required. Date when the customer's consent was captured.
ConsentCapturedSource	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Required. Source through which consent was captured. For example, user@example.com or www.example.com.
ConsentGiverId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the person who gave consent to the communication subscription on behalf of the contact point.  Note: If the contact point gave consent, don't use ConsentGiverId. This is a polymorphic relationship field. Relationship Name ConsentGiver Relationship Type Lookup Refers To Account, Contact, Individual, User
ContactPointId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort, Update Description ID of the contact point, such as an Individual or person account, associated with the communication subscription consent. This is a polymorphic relationship field. Relationship Name ContactPoint Relationship Type Lookup Refers To ContactPointAddress, ContactPointEmail, ContactPointPhone
DataUsePurposeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Represents the record for data use purpose that you want to associate this consent with. This field is available in API version 57.0 and later. This is a relationship field. Relationship Name DataUsePurpose Relationship Type Lookup Refers To DataUsePurpose
EffectiveFromDate	Type date Properties Create, Filter, Group, Sort, Update Description Required. Date when consent starts.
EffectiveToDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Date when consent ends. This field is restricted by field-level security.

Field	Details
EngagementChannelTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Represents the contact method you want to apply consent to. This field is available in API version 57.0 and later. This is a relationship field. Relationship Name EngagementChannelType Relationship Type Lookup Refers To EngagementChannelType
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Name of the communication subscription consent record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description The ID of the account owner associated with this customer. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PartyId	Type reference Properties Filter, Group, Nillable, Sort Description Represents the record based on the Individual object that you want to associate consent with. This field is available in API version 57.0 and later. This is a relationship field. Relationship Name Party Relationship Type Lookup Refers To Individual
PartyRoleId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the Party Role for the individual you want to associate consent with. This is a polymorphic relationship field. This field is available in API version 53.0 and later. Relationship Name PartyRole Relationship Type Lookup Refers To Customer, Seller
PrivacyConsentStatus	Type picklist

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Identifies whether the individual or person account associated with this record agrees to this form of contact. Possible values are: - NotSeen - OptIn - OptInPending—Available in API version 58.0 and later. - OptOut - OptOutPending—Available in API version 58.0 and later. - Seen The default value is <code>NotSeen</code>. This field is available in API version 57.0 and later.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

CommSubscriptionConsentChangeEvent (API version 49.0)

Change events are available for the object.

CommSubscriptionConsentFeed

Feed tracking is available for the object.

CommSubscriptionConsentHistory

History is available for tracked fields of the object.

CommSubscriptionConsentOwnerSharingRule

Sharing rules are available for the object.

CommSubscriptionConsentShare

Sharing is available for the object.

CommSubscriptionTiming

Represents a customer's timing preferences for receiving a communication subscription. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
CommSubscriptionConsentId	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the associated communication subscription consent record. This is a relationship field. Relationship Name CommSubscriptionConsent Relationship Type Lookup Refers To CommSubscriptionConsent
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Required. Name of the communication subscription timing record.
Offset	Type double

Field	Details
	Properties Create, Filter, Nillable, Sort, Update Description The amount of time before or after an event or the specific day of the week to communicate with the contact point. Set the unit of time in the <code>Unit</code> field. For example, if you set <code>Unit</code> as <i>Week</i> and <code>Offset</code> as <i>-4</i>, communicate with the contact point four weeks before the event. If you set <code>Offset</code> as <i>4</i>, communicate with the contact point four weeks after the event.
PreferredTimeEnd	Type time Properties Create, Filter, Nillable, Sort, Update Description End of the preferred time span in which to reach the customer.
PreferredTimeStart	Type time Properties Create, Filter, Nillable, Sort, Update Description Start of the preferred time span in which to reach the customer.
PreferredTimeZone	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Time zone of the preferred time span.
Unit	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The unit of time that works with the <code>Offset</code> field to determine the communication timing. Possible values are: • Day • DayOfWeek • Hour • Month

Field	Details
	• Week

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[CommSubscriptionTimingChangeEvent](#) (API version 62.0)

Change events are available for the object.

[CommSubscriptionTimingFeed](#)

Feed tracking is available for the object.

[CommSubscriptionTimingHistory](#)

History is available for tracked fields of the object.

Community (Zone)

Represents a zone that contains Idea or Question objects.



Note: Starting with the Summer '13 release, Chatter Answers and Ideas communities were renamed to zones. In API version 28, the API object label has changed to `Zone`, but the API type is still `Community`.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
<code>CanCreateCase</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether users can ask private questions in the zone using Chatter Answers.
<code>DataCategoryName</code>	Type string Properties Filter, Nillable, Group, Sort Description The data category associated with the zone.

Field	Details
Description	Type textarea Properties Filter, Nillable, Sort Description Text description of the zone.
HasChatterService	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether Chatter Answers is available in the zone.
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the zone is active or inactive. An idea or question can only be posted to an active zone.
IsPublished	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the zone is available in portals.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the zone.
NetworkId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description ID of the Experience Cloud site that this zone is associated with. This field is available only if digital experiences is enabled in your org. This field is available in API version 66.0 and later.

Usage

Use this object to create a zone in Ideas, Chatter Answers, or Answers. Zones help organize ideas and questions into logical groups and are shared by the Ideas, Answers, and Chatter Answers.

ConcurApexLimitEventLog

Concurrent Apex Limit event logs contain information about long-running concurrent Apex requests in your org that Salesforce terminated after reaching your org's concurrency limit. Requests with an established Apex context that execute for 5 seconds are counted towards your org's limit of concurrent long-running requests. (Asynchronous requests don't count towards the limit.) When the long-running requests exceed the org default limit, additional long-running requests are denied. This object is available in API version 61.0 and later.



Note: This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
<code>RequestCount</code>	Type int Properties Filter, Nillable, Sort Description Count of requests with an established Apex context executing for longer than 5 seconds in your org.
<code>RequestIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestId</code>. For example: <code>3nWgxWbDKWWDIk0FKfF5DV</code>.
<code>RequestLimit</code>	Type double Properties Filter, Nillable, Sort Description Maximum count of requests with an established Apex context that can execute for longer than 5 seconds. When <code>RequestCount</code> reaches this limit, then additional long-running Apex requests are terminated. (Asynchronous requests don't count towards the limit.) See <i>Apex Developer Guide: Lightning Platform Apex Limits</i>. For example: 10.
<code>RequestUri</code>	Type string Properties Filter, Group, Nillable, Sort Description The URI of the long-running Apex request that Salesforce terminated. For example: <code>/apex/ApexClassName</code>.
<code>Timestamp</code>	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, <code>2020-01-20T19:12:26.965Z</code>. Milliseconds are the most granular setting.
<code>UserIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: <code>00530000009M943</code>.

ConnectedApplication

Represents a connected app and its details; all fields are read-only.

Connected apps link client applications, third-party services, other Salesforce organizations, apps, and resources to your organization. The connected app configuration specifies authorization and security settings for these resources. This object exposes the settings for a specified connected app.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
MobileSessionTimeout	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Length of time after which the system logs out inactive mobile users.
MobileStartUrl	Type url Properties Filter, Nillable, Sort Description Users are directed to this URL after they've authenticated when the app is accessed from a mobile device.
Name	Type string Properties Filter, Group, idLookup, Sort Description The unique name for this object.
NamedUserUvidTimeout	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field Name	Details
	Description The timeout value for a JSON Web Token (JWT)-based access token that's issued to a named user. This field defines the timeout only if the app is configured to have an app-specific timeout. If the app uses the user's session timeout, the timeout value is defined based on the user's profile or the org session settings. For more information about defining JWT-based access token timeout, see Configure a Connected App to Issue JWT-Based Access Tokens. These values are available in API version 59.0 and later. • 1—1 Minute • 5—5 Minutes • 10—10 Minutes • 15—15 Minutes • 30—30 Minutes These values are available in API version 65.0 and later. • 60—1 Hour • 90—90 Minutes • 120—2 Hours • 240—4 Hours • 480—8 Hours • 720—12 Hours This field is available in API version 59.0 and later.
OptionsAllowAdminApprovedUsersOnly	Type boolean Properties Filter Description Indicates whether access is limited to users granted approval to use the connected app by an administrator. Manage profiles for the app by editing each profile's Access list.
OptionsCodeCredentialGuestEnabled	Reserved for future use.
OptionsFullContentPushNotifications	For internal use only.
OptionsHasSessionLevelPolicy	Type boolean Properties Filter Description Specifies whether the connected app requires a High Assurance level session.

Field Name	Details
OptionsIsInternal	For internal use only.
OptionsRefreshTokenValidityMetric	Type boolean Properties Filter Description Specifies whether the refresh token validity is based on duration or inactivity. If <code>true</code>, the token validity is measured based on the last use of the token; otherwise, it's based on the token duration.
OptionsTokenExchangeManageBitEnabled	Type boolean Properties Filter Description If <code>true</code>, the OAuth 2.0 token exchange flow is enabled.
PinLength	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description For mobile apps, this field is the PIN length requirement for users of the connected app. Valid values are 4, 5, 6, 7, or 8.
RefreshTokenValidityPeriod	Type int Properties Filter, Group, Nillable, Sort Description The duration of an authorization token until it expires in hours, months, or days as set in the connected app management page.
StartUrl	Type url Properties Filter, Nillable, Sort Description If the app isn't accessed from a mobile device, users are directed to this URL after they've authenticated.

Field Name	Details
UvidTimeout	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The timeout value for a JWT-based access token that's issued to an unknown user as a result of the guest user variation of the Authorization Code and Credentials Flow. JWT-based access tokens issued during this flow variation always contain a UVID. This field defines the timeout only if the app is configured to have an app-specific timeout. If the app uses the user's session timeout, the timeout value is defined based on the user's profile or the org session settings. For more information about defining JWT-based access token timeout, see Configure a Connected App to Issue JWT-Based Access Tokens. These values are available in API version 59.0 and later. • 1—1 Minute • 5—5 Minutes • 10—10 Minutes • 15—15 Minutes • 30—30 Minutes These values are available in API version 65.0 and later. • 60—1 Hour • 90—90 Minutes • 120—2 Hours • 240—4 Hours • 480—8 Hours • 720—12 Hours This field is available in API version 59.0 and later.

ConferenceNumber

Holds the telephone number for an external event shown in the Salesforce Today feature in the Salesforce mobile app. This object is available in API version 35.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The Salesforce Today app is available in Salesforce for Android and Salesforce for iOS. It's not available in the Salesforce desktop site. Access to Today is available only if you grant Calendar permission to the Salesforce mobile app.

Fields

Field	Details
AccessCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Specifies the access code to enter in order to validate identity and join the call.
ExternalEventId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the external event associated with the conference number. This field is a relationship field. Relationship Name ExternalEvent Refers To ExternalEvent
IsLocked	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Returns <code>true</code> if the conference number is locked, or <code>false</code> if it's not. The default value is <code>false</code>.
Label	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the conference number.

Field	Details
MayEdit	Type boolean Properties Defaulted on create, Filter, Group, Sort Indicates whether the conference number can be edited (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the conference call's organizer.
Number	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description The phone number used to connect to the conference call.
Vendor	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The vendor or company associated with the conference number.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ConferenceNumberChangeEvent](#)

Consumption Rate

Consumption rates describe the billing rate for a range of usage within a consumption schedule. All consumption schedules require at least one consumption rate in order to rate usage on a usage product. This object is available in API version 45.0 and later.

The consumption rate sets a quantity-based boundary for usage and defines how much your product costs when its usage falls within that boundary. Consumption rates price usage at a per-unit fee or a flat fee across the entire range of usage.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
ConsumptionScheduleId	Type reference Properties Create, Filter, Group, Sort Description The consumption schedule that contains the consumption rate. This is a relationship field. Relationship Name ConsumptionSchedule Relationship Type Lookup Refers To ConsumptionSchedule
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. Possible values are: • AUD—Australian Dollar • CAD—Canadian Dollar • GBP—British Pound • JPY—Japanese Yen • USD—U.S. Dollar
Description	Type textarea Properties Create, Nillable, Update Description Description of the consumption rate.

Field	Details
LowerBound	Type int Properties Create, Filter, Group, Sort, Update Description The lowest quantity of usage for the consumption rate.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Required. Default name of this record. Label is Product Name.
Price	Type currency Properties Create, Filter, Sort, Update Description The price for usage that falls within the consumption rate's bounds.
PricingMethod	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description How Salesforce applies the consumption rate's price to the total quantity of usage within a usage summary. Possible values are: • FlatFee—Salesforce applies the rate's price to the entire quantity of usage. • PerUnit—Salesforce applies the rate's price to each individual quantity of usage within the usage summary.
ProcessingOrder	Type int Properties Create, Filter, Group, Sort, Update Description The order for processing the usage rate across multiple rates. Consumption rates are evaluated beginning with the lowest processing order.

Field	Details
UpperBound	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The highest quantity of usage for the consumption rate.

Consumption Schedule

A consumption schedule organizes a set of consumption rates by which usage-based products are quoted and billed. This object is available in API version 45.0 and later.

Salesforce uses consumption schedules to group consumption rates. Your consumption schedule defines the unit of measurement and rating method for the schedule's rates. It also defines the billing frequency that Salesforce Billing uses to invoice a usage product.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
BillingTerm	Type int Properties Create, Filter, Group, Sort, Update Description The number used with the billing term unit to determine billing frequency.
BillingTermUnit	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The unit used with the billing term to determine billing frequency Possible values are: • Month— • Quarter— • Year—

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. Possible values are: • AUD—Australian Dollar • CAD—Canadian Dollar • GBP—British Pound • JPY—Japanese Yen • USD—U.S. Dollar
Description	Type textarea Properties Create, Nillable, Update Description Description of the consumption schedule.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this record is active (<code>true</code>) or not (<code>false</code>). Label is Active.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
MatchingAttribute	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Salesforce Billing matches usage with a consumption schedule if the records share Matching Attribute value.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Default name of this record. Label is Product Name.
NumberOfRates	Type int Properties Filter, Group, Nillable, Sort Description The number of consumption rates in this consumption schedule.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The user who owns a consumption schedule record. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Field	Details
RatingMethod	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A specific use case to rate usage against the schedule. This field is the controlling picklist for the Type field. Possible values are: • Tier
SBQQ__Category__c	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description This field is available only with Salesforce CPQ. You can define custom categories to organize consumption schedules in separate tabs on sales rep UI. If you do this, make sure to create a field set for each category. Possible values are: • Rates
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Defines how rate tiers are calculated. Possible values are: • Range—The schedule prices only using the tier that applies to the usage quantity. • Slab—Usage within a given bound receives pricing equal to its tier's value.
UnitOfMeasure	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description A unit of measure defines how you quantify instances of usage for your usage products. For example, if your usage product is a cloud storage subscription, you could provide a value of GB for your unit of measure.

Field	Details
<code>blng__BillingRule__c</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description This field is available only with Salesforce Billing. Salesforce Billing invoices usage summaries based off their related consumption schedule's billing rule.
<code>blng__RevenueRecognitionRule__c</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description This field is available only with Salesforce Billing. Salesforce Billing recognizes usage summary revenue based off the summary's related revenue recognition rule.
<code>blng__TaxRule__c</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description This field is available only with Salesforce Billing. Salesforce Billing taxes usage summary invoice lines based off the summary's related tax rule.

Contact

Represents a contact, which is a person associated with an account.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `merge()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Customer Portal users can access only portal-enabled contacts.

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the account that's the parent of this contact. We recommend that you update up to 50 contacts simultaneously when changing the accounts on contacts enabled for a Customer Portal or partner portal. We also recommend that you make this update after business hours. This is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
ActionCadenceAssigneeId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the sales rep designated to work the lead through their assigned cadence. This field is available in API version 48.0 and later when the Sales Engagement license is enabled. To see this field, the user also needs the Sales Engagement User or Sales Engagement Quick Cadence Creator user permission set.
ActionCadenceId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the lead's assigned cadence. This field is available in API version 48.0 and later when the Sales Engagement license is enabled. To see this field, the user also needs the Sales Engagement User or Sales Engagement Quick Cadence Creator user permission set.

Field	Details
ActionCadenceState	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The state of the current action cadence tracker. This field is available in API version 50.0 and later when the Sales Engagement license is enabled. To see this field, the user also needs the Sales Engagement User or Sales Engagement Quick Cadence Creator user permission set. Possible values are: • Complete • Error • Initializing • Paused • Processing • Running
ActiveTrackerCount	Type int Properties Filter, Group, Nillable, Sort Description The number of cadences that are actively running on this contact. This field is available in API version 57.0 and later when the Sales Engagement license is enabled. To see this field, the user also needs the Sales Engagement User or Sales Engagement Quick Cadence Creator user permission set.
ActivityMetricId	Type reference Properties Filter, Group, Nillable, Sort Description When Einstein Activity Capture with Activity Metrics is enabled, the ID of the related activity metric. This field is a relationship field. This field is available in API version 41.0 and later. Relationship Name ActivityMetric Refers To ActivityMetric

Field	Details
ActivityMetricRollupId	Type reference Properties Filter, Group, Nillable, Sort Description When Einstein Activity Capture with Activity Metrics is enabled, the ID of the related activity metric rollup. This field is a relationship field. This field is available in API version 41.0 and later. Relationship Name ActivityMetricRollup Refers To ActivityMetricRollup
AssistantName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The assistant's name.
AssistantPhone	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description The assistant's phone number. Label is Asst. Phone.
Birthdate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The contact's birthdate. Filter criteria for report filters, list view filters, and SOQL queries ignore the year portion of the Birthdate field. For example, this SOQL query returns contacts with birthdays later in the year than today: <pre>SELECT Name, Birthdate FROM Contact WHERE Birthdate > TODAY</pre>

Field	Details
BuyerAttributes	Type multipicklist Properties Create, Filter, Nillable, Restricted picklist, Update Description If Automatic Contact Enhancements or Buyer Relationship Map is enabled, this field contains the role of the contact in the opportunity or account. Possible values are: • <code>BusinessUser</code>—For example, an end user. Key value. • <code>Buyer</code>—Key value • <code>Champion</code>—Key value • <code>DecisionMaker</code>—Shown in green on a contact in the buyer relationship map UI. Key value. • <code>Detractor</code>—Shown in red on a contact in the buyer relationship map UI. Key value. • <code>Evaluator</code> • <code>ExecutiveSponsor</code>—Key value • <code>TechnicalExpert</code> Key values represent key contacts on an opportunity or account. If a buyer relationship map doesn't have contacts with key values, then Salesforce prompts you to add them. Having all key values represented on the map provides a full view of the deal or account, increasing sales success.  Warning: To ensure that the buyer relationship map feature works as expected, don't modify field values. For example, if you change <code>Detractor</code> to <code>Detract</code>, the value isn't shown in red in a buyer relationship map. This field is available with all profiles except custom and minimum-access. To provide access, use field-level security in Object Manager.
CanAllowPortalSelfReg	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this contact can self-register for your Customer Portal (<code>true</code>) or not (<code>false</code>).
CleanStatus	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description Indicates the record's clean status as compared with Data.com. Values include: Matched, Different, Acknowledged, NotFound, Inactive, Pending, SelectMatch, or Skipped. Several values for CleanStatus appear with different labels on the contact record. • Matched appears as In Sync • Acknowledged appears as Reviewed • Pending appears as Not Compared
ConnectionReceivedId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the PartnerNetworkConnection that shared this record with your organization. This field is available if you enabled Salesforce to Salesforce.
ConnectionSentId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the PartnerNetworkConnection that you shared this record with. This field is available if you enabled Salesforce to Salesforce. This field is supported using API versions earlier than 15.0. In all other API versions, this field's value is null. You can use the new PartnerNetworkRecordConnection object to forward records to connections.
ContactSource	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description If Automatic Contact Creation is enabled, this field indicates whether the contact was created automatically. A possible value is: • Auto Create
Department	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The contact's department.

Field	Details
DepartmentGroup	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description If Automatic Contact Enhancements or Buyer Relationship Map is enabled, this field contains the business unit, function, or department that the contact belongs to in the organization. Possible values are: • <code>chiefExecutive</code>—Key value • <code>customerSuccess</code>—For example, wealth management, consumer banking, subject matter experts, or healthcare research experts. • <code>finance</code>—Includes pricing and procurement. Key value. • <code>humanResources</code> • <code>legal</code>—Key value • <code>marketing</code> • <code>other</code> • <code>sales</code> • <code>support</code>—For example, tech support or customer support. • <code>tech</code>—For example, IT or engineering. Key value. Key values represent key contacts on an opportunity or account. If a buyer relationship map doesn't have contacts with key values, then Salesforce prompts you to add them. Having all key values represented on the map provides a full view of the deal or account, increasing sales success. This field is available with all profiles except custom and minimum-access. To provide access, use field-level security in Object Manager.
Description	Type textarea Properties Create, Nillable, Update Description A description of the contact. Label is Contact Description up to 32 KB.
DoNotCall	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates that the contact doesn't want to receive calls.
Email	Type email

Field	Details
	Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The contact's email address.
EmailBouncedDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description If bounce management is activated and an email sent to the contact results in a hard bounce, the date and time of the bounce.  Note: Email bounce functionality isn't triggered by record updates, including updates to this field.
EmailBouncedReason	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description If bounce management is activated and an email sent to the contact results in a hard bounce, the reason for the bounce.  Note: Email bounce functionality isn't triggered by record updates, including updates to this field.
Fax	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description The contact's fax number. Label is Business Fax.
FirstCallDateTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time of the first call placed to the contact. This field is available in API version 48.0 and later when the Sales Engagement license is enabled. To see this field, the user also needs the Sales Engagement User or Sales Engagement Quick Cadence Creator user permission set.

Field	Details
FirstEmailDateTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time of the first email sent to the contact. This field is available in API version 48.0 and later when the Sales Engagement license is enabled. To see this field, the user also needs the Sales Engagement User or Sales Engagement Quick Cadence Creator user permission set.
FirstName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The contact's first name up to 40 characters.
GenderIdentity	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The contact's internal experience of their gender, which may or may not correspond to their designated sex at birth.
HasOptedOutOfEmail	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the contact doesn't want to receive email from Salesforce (<code>true</code>) or does (<code>false</code>). Label is Email Opt Out.
HasOptedOutOfFax	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the contact prohibits receiving faxes.
HomePhone	Type phone

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The contact's home phone number. Label is Home Phone.
IndividualId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the data privacy record associated with this contact. This field is available if Data Protection and Privacy is enabled. This is a relationship field. Relationship Name Individual Relationship Type Lookup Refers To Individual
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
IsEmailBounced	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If bounce management is activated and an email is sent to a contact, indicates whether the email results in a soft or hard bounce (<code>true</code>) or not (<code>false</code>).
IsPersonAccount	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Read only. Indicates whether this account has a record type of Person Account (<code>true</code>) or not (<code>false</code>). Label is Is Person Account.
IsPriorityRecord	Type boolean Properties Defaulted on create, Group Description Shows whether the user has marked the contact as important (<code>True</code>) or not (<code>False</code>). The default value is <code>false</code>. Available in API version 59.0 and later.
Jigsaw	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description References the company's ID in Data.com. If an account has a value in this field, it means that the account was imported from Data.com. If the field value is <code>null</code>, the account wasn't imported from Data.com. Maximum size is 20 characters. Available in API version 22.0 and later. Label is Data.com Key.  Important: The <code>Jigsaw</code> field is exposed in the API to support troubleshooting for import errors and reimporting of corrected data. Do not modify this value.
JigsawContactId	Type string Properties Filter, Group, Nillable, Sort Description The ID of the contact in reference to <code>Jigsaw</code>.  Important: The <code>Jigsaw</code> field is exposed in the API to support troubleshooting for import errors and reimporting of corrected data. Don't modify the value in the <code>Jigsaw</code> field.
LastActivityDate	Type date Properties Filter, Group, Nillable, Sort Description Value is the most recent of either: • Due date of the most recent event logged against the record.

Field	Details
	Due date of the most recently closed task associated with the record.
LastName	Type string Properties Create, Filter, Group, Sort, Update Description Required. Last name of the contact up to 80 characters.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
LeadSource	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The source of the lead that was converted to this contact.
MailingAddress	Type address Properties Filter, Nillable Description The compound form of the mailing address. Read-only. For details on compound address fields, see Address Compound Fields.

Field	Details
MailingCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Mailing address details.
MailingCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Mailing address details.
MailingCountryCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO codes for the mailing address's state and country.
MailingGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update, Query, Restricted picklist, Nillable Description Accuracy level of the geocode for the mailing address. For details on geolocation compound field, see Compound Field Considerations and Limitations.
MailingLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>MailingLongitude</code> to specify the precise geolocation of a mailing address. Acceptable values are numbers between –90 and 90 up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations.
MailingLongitude	Type double Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description Used with <code>MailingLatitude</code> to specify the precise geolocation of a mailing address. Acceptable values are numbers between –180 and 180 up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations.
<code>MailingPostalCode</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Mailing address details.
<code>MailingState</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Mailing address details.
<code>MailingStateCode</code>	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO codes for the mailing address's state and country.
<code>MailingStreet</code>	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Street address for mailing address.
<code>MasterRecordId</code>	Type reference Properties Filter, Group, Nillable, Sort Description If this record was deleted as the result of a merge, this field contains the ID of the record that remains. If this record was deleted for any other reason, or hasn't been deleted, the value is <code>null</code>. This is a relationship field.

Field	Details
	Relationship Name MasterRecord Relationship Type Lookup Refers To Contact
MiddleName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The contact's middle name. Maximum size is 40 characters.
MobilePhone	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description Contact's mobile phone number. Label is Mobile Phone .
Name	Type string Properties Filter, Group, Sort Description Concatenation of <code>FirstName</code> , <code>MiddleName</code> , <code>LastName</code> , and <code>Suffix</code> up to 203 characters, including whitespaces.
OtherAddress	Type address Properties Filter, Nillable Description The compound form of the other address. Read-only. For details on compound address fields, see Address Compound Fields .
OtherCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description Alternate address details.
OtherCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Alternate address details.
OtherCountryCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO codes for the alternate address's state and country.
OtherGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Accuracy level of the geocode for the other address. For details on geolocation compound fields, see Compound Field Considerations and Limitations .
OtherLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with OtherLongitude to specify the precise geolocation of an alternate address. Acceptable values are numbers between –90 and 90 up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations .
OtherLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with OtherLatitude to specify the precise geolocation of an alternate address. Acceptable values are numbers between –180 and 180 up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations .

Field	Details
OtherPhone	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description Phone for alternate address.
OtherPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Alternate address details.
OtherState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Alternate address details.
OtherStateCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO codes for the alternate address's state and country.
OtherStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Street for alternate address.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of the account associated with this contact.

Field	Details
	This is a relationship field. Relationship Name Owner Relationship Type Lookup Refers To User
Phone	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description Phone number for the contact. Label is Business Phone.
PhotoUrl	Type url Properties Filter, Group, Nillable, Sort Description Path to be combined with the URL of a Salesforce instance (<i>Example:</i> <code>https://yourInstance.salesforce.com/</code>) to generate a URL to request the social network profile image associated with the contact. Generated URL returns an HTTP redirect (code 302) to the social network profile image for the contact. Empty if Social Accounts and Contacts isn't enabled or if Social Accounts and Contacts is disabled for the requesting user.
Pronouns	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The contact's personal pronouns, reflecting their gender identity. Others can use these pronouns to refer to the contact in the third person. The entry is selected from a picklist of available values, which the administrator sets. Maximum 40 characters. Possible values are: • He/Him • He/They • Not Listed • She/Her • She/They

Field	Details
	• They/Them
RecordTypeId	Type reference Properties Create, Filter, Nillable, Update Description ID of the record type assigned to this object.
ReportsToId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the contact that this contact reports to. This is a relationship field. Relationship Name ReportsTo Relationship Type Lookup Refers To Contact
Salutation	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Honorific abbreviation, word, or phrase to be used in front of name in greetings, such as Dr. or Mrs.
ScheduledResumeDateTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the action cadence tracker is going to resume after it's paused or on a wait step. This field is available in API version 54.0 and later when the Sales Engagement license is enabled. To see this field, the user also needs the Sales Engagement User or Sales Engagement Quick Cadence Creator user permission set.

Field	Details
Suffix	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Name suffix of the contact. Maximum size is 40 characters.
Title	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Title of the contact, such as CEO or Vice President.
TitleType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description If Automatic Contact Enhancements or Buyer Relationship Map is enabled, this field contains the hierarchical position that the contact holds in the organization. In the UI, this field is shown as Seniority Level. Possible values are: • <code>ceo</code>—Key value • <code>directorOrManager</code>—Key value • <code>executive</code>—Key value • <code>individualContributor</code> • <code>vp</code>—VP or Head of Department. Key value. Key values represent key contacts on an opportunity or account. If a buyer relationship map doesn't show contacts with key values, then Salesforce prompts you to add them. Having all key values represented on the map provides a complete picture of the deal or account, increasing sales success. This field is available with all profiles except custom and minimum-access. To provide access, use field-level security in Object Manager.



Note: When importing contact data, users need the Set Audit Fields upon Record Creation permission to assign values to audit fields such as `CreatedDate`. Audit fields are automatically updated during API operations unless you set these fields yourself.

Usage

Use this object to manage individual people who are associated with an account. You can create, query, delete, or update any attachment associated with a contact.

Create or update contacts by converting a lead with the `convertLead()` call.

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AccountChangeEvent (API version 44.0)

Change events are available for the object.

ContactFeed (API version 18.0)

Feed tracking is available for the object.

ContactHistory (API version 11.0)

History is available for tracked fields of the object.

ContactOwnerSharingRule

Sharing rules are available for the object.

ContactShare

Sharing is available for the object.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

ContactCenterChannel

Represents a junction object that relates a Bring Your Own Channel for Contact Center as a Service (CCaaS) messaging channel to a CallCenter object for Bring Your Own Channel for CCaaS. This object also represents the routing details for a voicemail configuration and routing information for callback requests. This object is available in API version 56.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, Service Cloud Voice with Amazon Connect, Service Cloud Voice with Partner Telephony, Service Cloud Voice with Partner Telephony from Amazon Connect, or Bring Your Own Channel for Contact Center as a Service (CCaaS) must be enabled. To access this object, you must be a SysAdmin user or have ViewSetup user permissions.

Fields

Field	Details
ChannelId	Type reference
	Properties Create, Filter, Group, Sort, Update

Field	Details
	Description For Bring Your Own Channel for CCaaS, this field represents the unique ID of the Bring Your Own Channel messaging channel (MessagingChannel) that's associated with the contact center (CallCenterId). Available in API version 60.0 and later. This field is a relationship field. Relationship Name Channel Refers To MessagingChannel
ContactCenterId	Type reference Properties Create, Filter, Group, Sort Description This field is a relationship field. For Bring Your Own Channel for CCaaS, this field represents the unique ID of the contact center (CallCenterId) that's associated with the Bring Your Own Channel messaging channel (MessagingChannel). Available in API version 60.0 and later. This field is a relationship field. Relationship Name ContactCenter Relationship Type Master-detail Refers To CallCenter (the master object)
OmniCallbackFallbackQueueId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description If callbacks are configured for the contact center and the contact center uses Omni-Channel Unified Routing, this field represents the unique ID of the fallback queue to use if contact request routing through an Omni-Channel flow fails. Don't change the value in this field. Instead, configure contact request routing in Lightning Experience. Available in API version 65.0 and later. This field is a relationship field. Relationship Name OmniCallbackFallbackQueue Refers To Group

Field	Details
OmniCallbackHandler	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description If callbacks are configured for the contact center and the contact center uses Omni-Channel Unified Routing, this field represents the unique ID of the flow or queue used to route contact requests. Don't change the value in this field. Instead, configure contact request routing in Lightning Experience. Available in API version 65.0 and later.
UserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Available in API version 63.0 only. For internal use.
VoicemailFallbackQueueId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description If voicemail routing is configured for the contact center, this field represents the unique ID of the fallback queue to use if voicemail routing fails. Don't change the value in this field. Instead, configure voicemail routing in Lightning Experience. This field is a relationship field. Relationship Name VoicemailFallbackQueue Refers To Group
VoicemailHandler	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description If voicemail routing is configured for the contact center, this field represents the unique ID of the flow used to route voicemails. Don't change the value in this field. Instead, configure voicemail routing in Lightning Experience.

ContactCleanInfo

Stores the metadata Data.com Clean uses to determine a contact record's clean status. Helps you automate the cleaning or related processing of contact records. ContactCleanInfo includes a number of bit vector fields.



Note: When your Data.com Prospector or Data.com Clean contract expires, Data.com features, objects, and fields will be removed from your org.

To support customers' needs around compliance and to remain a leader in trust and privacy, Salesforce removed all contact data from the Data.com service on February 1, 2021.

For more information, see [Data.com Prospector and Clean Retirement](#).

Contact Clean Info provides a snapshot of the data in your Salesforce contact record and its matched Data.com record at the time the Salesforce record was cleaned.

Contact Clean Info includes a number of bit vector fields, whose component fields each correspond to individual object fields and provide related data or status information about those fields. For example, the bit vector field `IsDifferent` has an `IsDifferentEmail` field. If the `IsDifferentEmail` field's value is `False`, that means the `Email` field value is *the same* on the Salesforce contact record and its matched Data.com record.

ContactCleanInfo bit vector fields include:

- `CleanedBy` indicates who (a user) or what (a Clean job) cleaned the contact record.
- `IsDifferent` indicates whether or not a field on the contact record has a value that differs from the corresponding field on the matched Data.com record.
- `IsFlaggedWrong` indicates whether or not a field on the contact record has a value that is flagged as wrong to Data.com.
- `IsReviewed` indicates whether or not a field on the contact record is in a `Reviewed` state, which means that the value was reviewed but not accepted.

Fields

Field Name	Details
Address	Type address Properties Filter, Nillable Description The compound form of the address. Read-only. See Address Compound Fields for details on compound address fields.
City	Type string Properties Filter, Group, Nillable, Sort Description Details for the billing address of the contact.

Field Name	Details
CleanedByJob	Type boolean Properties Filter Description Indicates whether the contact record was cleaned by a Data.com Clean job (<code>true</code>) or not (<code>false</code>).
CleanedByUser	Type boolean Properties Filter Description Indicates whether the contact record was cleaned by a Salesforce user (<code>true</code>) or not (<code>false</code>).
ContactId	Type reference Properties Filter, Group, Sort Description The unique, system-generated ID assigned when the contact record was created.
ContactStatusDataDotCom	Type picklist Properties Filter, Group, Nillable, Sort Description The status of the contact per Data.com. Values are: Contact is Active per Data.com, Phone is Wrong per Data.com , Email is Wrong per Data.com, Phone and Email are Wrong per Data.com, Contact Not at Company per Data.com, Contact is Inactive per Data.com, Company this contact belongs to is out of business per Data.com, Company this contact belongs to never existed per Data.com or Email address is invalid per Data.com.
Country	Type string Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description Details for the billing address of the contact.
DataDotComID	Type string Properties Filter, Group, Nillable, Sort Description The ID Data.com maintains for the contact.
Email	Type email Properties Filter, Group, Nillable, Sort Description The email address for the contact.
FirstName	Type string Properties Filter, Group, Nillable, Sort Description The contact's first name.
IsDifferentCity	Type boolean Properties Filter Description Indicates whether the contact's <code>City</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
IsDifferentCountry	Type boolean Properties Filter Description Indicates whether the contact's <code>Country</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
IsDifferentCountryCode	Type boolean

Field Name	Details
	Properties Filter Description Indicates whether the contact's <code>Country Code</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentEmail</code>	Type boolean Properties Filter Description Indicates whether the contact's <code>Email</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentFirstName</code>	Type boolean Properties Filter Description Indicates whether the contact's <code>First Name</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentLastName</code>	Type boolean Properties Filter Description Indicates whether the contact's <code>Last Name</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentPhone</code>	Type boolean Properties Filter Description Indicates whether the contact's <code>Phone</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentPostalCode</code>	Type boolean Properties Filter

Field Name	Details
	Description Indicates whether the contact's <code>Postal Code</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentState</code>	Type boolean Properties Filter Description Indicates whether the contact's <code>State</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentStateCode</code>	Type boolean Properties Filter Description Indicates whether the contact's <code>State Code</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentStreet</code>	Type boolean Properties Filter Description Indicates whether the contact's <code>Street</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentTitle</code>	Type boolean Properties Filter Description Indicates whether the contact's <code>Title</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongAddress</code>	Type boolean Properties Filter, Update

Field Name	Details
	Description Indicates whether the contact's <code>Address</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongEmail</code>	Type boolean Properties Filter, Update Description Indicates whether the contact's <code>Email</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongName</code>	Type boolean Properties Filter, Update Description Indicates whether the contact's <code>Name</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongPhone</code>	Type boolean Properties Filter, Update Description Indicates whether the contact's <code>Phone</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongTitle</code>	Type boolean Properties Filter, Update Description Indicates whether the contact's <code>Title</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsInactive</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field Name	Details
	Description Indicates whether the contact has been reported to Data.com as <i>Inactive</i> (<code>true</code>) or not (<code>false</code>).
IsReviewedAddress	Type boolean Properties Filter, Update Description Indicates whether the contact's <code>Address</code> field value is in a <code>Reviewed</code> state (<code>true</code>) or not (<code>false</code>).
IsReviewedEmail	Type boolean Properties Filter, Update Description Indicates whether the contact's <code>Email</code> field value is in a <code>Reviewed</code> state (<code>true</code>) or not (<code>false</code>).
IsReviewedName	Type boolean Properties Filter, Update Description Indicates whether the contact's <code>Name</code> field value is in a <code>Reviewed</code> state (<code>true</code>) or not (<code>false</code>).
IsReviewedPhone	Type boolean Properties Filter, Update Description Indicates whether the contact's <code>Phone</code> field value is in a <code>Reviewed</code> state (<code>true</code>) or not (<code>false</code>).
IsReviewedTitle	Type boolean Properties Filter, Update

Field Name	Details
	Description Indicates whether the contact's <code>Title</code> field value is in a <code>Reviewed</code> state (<code>true</code>) or not (<code>false</code>).
<code>LastMatchedDate</code>	Type dateTime Properties Filter, Sort Description The date the contact record was last matched and linked to a Data.com record.
<code>LastName</code>	Type string Properties Filter, Group, Nillable, Sort Description The contact's last name.
<code>LastStatusChangedById</code>	Type reference Properties Filter, Group, Nillable, Sort Description The ID of who or what last changed the record's <code>Clean Status</code> field value: a Salesforce user or a Clean job.
<code>LastStatusChangedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The date on which the record's <code>Clean Status</code> field value was last changed.
<code>Latitude</code>	Type double Properties Filter, Nillable, Sort Description Used with <code>Longitude</code> to specify the precise geolocation of a billing address. Data not currently provided.

Field Name	Details
Longitude	Type double Properties Filter, Nillable, Sort Description Used with <code>Latitude</code> to specify the precise geolocation of a billing address. Data not currently provided.
Name	Type string Properties Filter, Group, Sort, Update Description Field label is Contact Clean Info Name. The name of the contact. Maximum size is 255 characters.
Phone	Type phone Properties Filter, Group, Nillable, Sort Description The phone number for the contact.
PostalCode	Type string Properties Filter, Group, Nillable, Sort Description Details for the billing address of the contact.
State	Type string Properties Filter, Group, Nillable, Sort Description Details for the billing address of the contact.
Street	Type textarea Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description Details for the billing address of the contact.
Title	Type string Properties Filter, Group, Nillable, Sort Description The contact's title.

Usage

Developers can create triggers that read the Contact Clean Info fields to help automate the cleaning or related processing of contact records.

Create a customized set of `Title` field values. Use triggers to map values from fields on imported or cleaned records onto a standard set of values.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ContactCleanInfoChangeEvent](#) (API version 62.0)

Change events are available for the object.

ContactDailyMetric

Represents the daily engagement metrics for a contact. This object is available in API version 52.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Inbox must be enabled.

Fields

Field	Details
AllCallsCallBackLater	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the day for this contact with the call result Call Back Later.
AllCallsLeftVoicemail	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the day for this contact with the call result Left Voicemail.
AllCallsMeaningfulConnect	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the day for this contact with the call result Meaningful Connect.
AllCallsNotInterested	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the day for this contact with the call result Not Interested.
AllCallsUncategorized	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the day for this contact with no call result specified.
AllCallsUnqualified	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of calls in the day for this contact with the call result Unqualified.
AllEmailsBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The total of hard and soft bounced emails for this contact in the day. This is a calculated field.
AllEmailsDeliveredCount	Type int Properties Filter, Group, Nillable, Sort Description The number of successfully delivered emails for this contact in the day. This is a calculated field.
AllEmailsDeliveredRate	Type percent Properties Filter, Nillable, Sort Description The percentage of tracked emails sent that were successfully delivered to this contact. This field is a calculated field. Available in API version 54.0 and later.
AllEmailsHardBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of hard bounced emails for this contact in the day.
AllEmailsOutOfOfficeCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails that triggered an out of office reply for this contact in the day.

Field	Details
AllEmailsSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this contact in the day. This is a calculated field.
AllEmailsSoftBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails soft bounced for this contact in the day.
AllEmailsTrackedSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this contact with engagement tracking enabled in the day.
AllEmailsUntrackedSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this contact without engagement tracking enabled in the day.
AllTotalCallsCount	Type int Properties Filter, Group, Nillable, Sort Description The total number of calls to this contact with all call results in the day. This is a calculated field.
ContactId	Type reference Properties Filter, Group, Sort

Field	Details
	Description The ID of the related contact. This is a relationship field. Relationship Name Contact Relationship Type Lookup Refers To Contact
DailyCutoffTimeStamp	Type dateTime Properties Filter, Sort Description The time of day when each 24-hour metrics period starts and ends.
Date	Type date Properties Filter, Group, Sort Description The date on which the engagement occurred.
DateInt	Type int Properties Filter, Group, idLookup, Sort Description The date on which the engagement occurred, in yyymmdd format.
HardBounceTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this contact with hard bounce tracking. Available in API version 54.0 and later.
InboundEngagementsCount	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The number of inbound engagements for this contact in the day. This field is a calculated field. The value is the sum of <code>UniqueEmailsOpenedCount</code>, <code>UniqueEmailsRepliedCount</code>, and <code>UniqueEmailsLinkClickedCount</code>. Available in API version 58.0 and later.
LinkClickTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this contact with link click tracking. Available in API version 54.0 and later.
OpenTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this contact with open tracking. Available in API version 54.0 and later.
OutOfOfficeTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this contact with out-of-office tracking. Available in API version 54.0 and later.
OutboundEngagementsCount	Type int Properties Filter, Group, Nillable, Sort Description The number of outbound engagements for this contact in the day. This field is a calculated field. The value is the sum of <code>AllTotalCallsCount</code> and <code>AllEmailsDeliveredCount</code>. Available in API version 58.0 and later.

Field	Details
ReplyTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this contact with reply tracking. Available in API version 54.0 and later.
SoftBounceTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this contact with soft bounce tracking. Available in API version 54.0 and later.
TrackableSendHardBounceRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this contact with hard bounce tracking that hard bounced. This field is a calculated field. Available in API version 54.0 and later.
TrackableSendLinkClickRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this contact with link tracking that had link clicks. This field is a calculated field. Available in API version 54.0 and later.
TrackableSendOpenRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this contact with open tracking that were opened by the recipient. This field is a calculated field.

Field	Details
	Available in API version 54.0 and later.
TrackableSendOutOfOfficeRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this contact with out-of-office tracking that received out-of-office replies. This field is a calculated field. Available in API version 54.0 and later.
TrackableSendReplyRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this contact with reply tracking that received replies. This field is a calculated field. Available in API version 54.0 and later.
TrackableSendSoftBounceRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this contact with soft bounce tracking that soft bounced. This field is a calculated field. Available in API version 54.0 and later.
UniqueEmailsLinkClickedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of individual emails in which the contact clicked a link in the day.
UniqueEmailsOpenedCount	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of individual emails opened by the contact in the day.
UniqueEmailsRepliedCount	Type int
	Properties Filter, Group, Nillable, Sort
	Description The number of individual emails replied to by the contact in the day.

ContactMonthlyMetric

Represents the monthly engagement metrics for a contact. This object is available in API version 52.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Inbox must be enabled.

Fields

Field	Details
AllCallsCallBackLater	Type int
	Properties Filter, Group, Nillable, Sort
	Description The number of calls in the month for this contact with the call result Call Back Later.
AllCallsLeftVoicemail	Type int
	Properties Filter, Group, Nillable, Sort
	Description The number of calls in the month for this contact with the call result Left Voicemail.

Field	Details
AllCallsMeaningfulConnect	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this contact with the call result Meaningful Connect.
AllCallsNotInterested	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this contact with the call result Not Interested.
AllCallsUncategorized	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this contact with no call result specified.
AllCallsUnqualified	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this contact with the call result Unqualified.
AllEmailsBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The total of hard and soft bounced emails for this contact in the month. This is a calculated field.
AllEmailsDeliveredCount	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of successfully delivered emails for this contact in the month. This is a calculated field.
AllEmailsDeliveredRate	Type percent Properties Filter, Nillable, Sort Description The percentage of tracked emails sent that were successfully delivered to this contact. Available in API version 54.0 and later. This field is a calculated field.
AllEmailsHardBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of hard bounced emails for this contact in the month.
AllEmailsOutOfOfficeCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails that triggered an out of office reply for this contact in the month.
AllEmailsSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this contact in the month. This is a calculated field.
AllEmailsSoftBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails soft bounced for this contact in the month.

Field	Details
AllEmailsTrackedSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this contact with engagement tracking enabled in the month.
AllEmailsUntrackedSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this contact without engagement tracking enabled in the month.
AllTotalCallsCount	Type int Properties Filter, Group, Nillable, Sort Description The total number of calls to this contact with all call results in the month. This is a calculated field.
ContactId	Type reference Properties Filter, Group, Sort Description The ID of the related contact. This is a relationship field. Relationship Name Contact Relationship Type Lookup Refers To Contact
HardBounceTrackableSends	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of emails sent to this contact with hard bounce tracking. Available in API version 54.0 and later.
LinkClickTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this contact with link click tracking. Available in API version 54.0 and later.
Month	Type date Properties Filter, Group, Sort Description The month in which the engagement occurred.
MonthInt	Type int Properties Filter, Group, idLookup, Sort Description The month in which the engagement occurred, in yyyyymm format.
OpenTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this contact with open tracking. Available in API version 54.0 and later.
OutOfOfficeTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this contact with out-of-office tracking. Available in API version 54.0 and later.

Field	Details
ReplyTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this contact with reply tracking. Available in API version 54.0 and later.
SoftBounceTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this contact with soft bounce tracking. Available in API version 54.0 and later.
TrackableSendHardBounceRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this contact with hard bounce tracking that hard bounced. Available in API version 54.0 and later. This field is a calculated field.
TrackableSendLinkClickRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this contact with link tracking that had link clicks. Available in API version 54.0 and later. This field is a calculated field.
TrackableSendOpenRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this contact with open tracking that were opened by the recipient. Available in API version 54.0 and later.

Field	Details
	This field is a calculated field.
TrackableSendOutOfOfficeRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this contact with out-of-office tracking that received out-of-office replies. Available in API version 54.0 and later. This field is a calculated field.
TrackableSendReplyRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this contact with reply tracking that received replies. Available in API version 54.0 and later. This field is a calculated field.
TrackableSendSoftBounceRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this contact with soft bounce tracking that soft bounced. Available in API version 54.0 and later. This field is a calculated field.
UniqueEmailsLinkClickedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of individual emails in which the contact clicked a link in the month.
UniqueEmailsOpenedCount	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of individual emails opened by the contact in the month.
UniqueEmailsRepliedCount	Type int
	Properties Filter, Group, Nillable, Sort
	Description The number of individual emails replied to by the contact in the month.

ContactPointAddress

Represents a contact's billing or shipping address, which is associated with an individual or person account. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ActiveFromDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date when the contact's address became active.
ActiveToDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date when the contact's address is no longer active.
Address	Type address

Field	Details
	Properties Filter, Nillable Description The full address.
AddressFirstName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description First name associated with the address. The field is available only if the B2B Commerce license is enabled. This field is available in API version 57.0 and later.
AddressLastName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Last name associated with the address. The field is available only if the B2B Commerce license is enabled. This field is available in API version 57.0 and later.
AddressMiddleName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Middle name associated with the address. The field is available only if the B2B Commerce license is enabled. This field is available in API version 57.0 and later.
AddressType	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the type of address. Possible values are: • Billing

Field	Details
	Shipping
BestTimeToContactEndTime	Type time Properties Create, Filter, Nillable, Sort, Update Description The latest time to contact the individual.
BestTimeToContactStartTime	Type time Properties Create, Filter, Nillable, Sort, Update Description The earliest time to contact the individual.
BestTimeToContactTimezone	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The time zone applied to the best time to contact the individual.
City	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The address city.
CompanyName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Company name associated with the address. The field is available only if the B2B Commerce license is enabled. This field is available in API version 57.0 and later.
ContactPointPhoneId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Represents the primary phone number associated with this address. This is a relationship field. Relationship Name ContactPointPhone Relationship Type Lookup Refers To ContactPointPhone
Country	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The address country.
GeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The level of accuracy of a location's geographical coordinates compared with its physical address. A geocoding service typically provides this value based on the address's latitude and longitude coordinates. Possible values are: • Address • Block • City • County • ExtendedZip • NearAddress • Neighborhood • State • Street • Unknown • Zip

Field	Details
IsDefault	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether a contact's address is the preferred method of communication (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
IsPrimary	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether a contact's address is their primary address (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
IsThirdPartyAddress	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the address is associated with a third party (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>. This field is available in API version 57.0 and later.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last referenced a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
Latitude	Type double

Field	Details
	Properties Create, Filter, Nillable, Sort, Update Description Used with <code>Longitude</code> to specify the precise geolocation of the address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places.
Longitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>Latitude</code> to specify the precise geolocation of the address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. The name of the contact point address record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the account's owner associated with this contact. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ParentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The ID of the contact's parent record. Only an individual or account can be a contact's parent. Because this is a master-detail relationship, users must have Edit access to the parent record to create or modify a Contact Point Address. This is a polymorphic relationship field. Relationship Name Parent Relationship Type Master-detail Refers To Account, Individual
PhoneNumber	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description Phone number associated with the address. The field is available only if the B2B Commerce license is enabled. This field is available in API version 57.0 and later.
PostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The address postal code.
PreferenceRank	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Preference rank when there are multiple contact point addresses.
State	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The address state.

Field	Details
Street	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The address street.
UsageType	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Specify the usage type of this address. For instance, whether it's a work address or a home address. Possible values are: • Home • Inactive • Temporary • Work

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ContactPointAddressChangeEvent

Change events are available for the object.

ContactPointAddressHistory

History is available for tracked fields of the object.

ContactPointAddressShare

Sharing is available for the object.

ContactPointConsent

Represents a customer's consent to be contacted via a specific contact point, such as an email address or phone number. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

With certain page layout and field-level security settings, some fields aren't visible or editable.

Field	Details
BusinessBrandId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the Business Brand that the individual has given consent to for a contact point. This is a relationship field. This field is available in API version 53.0 and later. Relationship Name BusinessBrand Relationship Type Lookup Refers To BusinessBrand
CaptureContactPointType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Required. Indicates how you captured consent. Possible values are: • Email • MailingAddress • Phone • Social • Web
CaptureDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Required. Date when consent was captured.
CaptureSource	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Required. Indicates how you captured consent. For example, a website or online form.
ContactPointId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the contact point record through which the customer is consenting to be contacted. This is a polymorphic relationship field. Relationship Name ContactPoint Relationship Type Lookup Refers To ContactPointAddress, ContactPointEmail, ContactPointPhone
DataUsePurposeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the data use purpose record that you want to associate this consent with. This is a relationship field. Relationship Name DataUsePurpose Relationship Type Lookup Refers To DataUsePurpose
DoubleConsentCaptureDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date when double opt-in was captured.

Field	Details
EffectiveFrom	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date when consents starts.
EffectiveTo	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date when consent ends.
EngagementChannelTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the engagement channel record through which the customer is consenting to be contacted.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update

Field	Details
	Description Name of the contact point type consent record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the account owner associated with this customer. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PartyRoleId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the Party Role for the individual you want to associate consent with. This is a polymorphic relationship field. This field is available in API version 53.0 and later. Relationship Name PartyRole Relationship Type Lookup Refers To Customer, Seller
PrivacyConsentStatus	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Required. Identifies whether the individual or person account associated with this record agrees to this form of contact. Possible values are: - NotSeen - OptIn

Field	Details
	• <code>OptInPending</code>—Available in API version 58.0 and later. • <code>OptOut</code> • <code>Seen</code>

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ContactPointConsentChangeEvent](#)

Change events are available for the object.

[ContactPointConsentHistory](#)

History is available for tracked fields of the object.

[ContactPointConsentOwnerSharingRule](#)

Sharing rules are available for the object.

[ContactPointConsentShare](#)

Sharing is available for the object.

ContactPointEmail

Represents a contact's email, which is associated with an individual or person account. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
<code>ActiveFromDate</code>	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date when the contact's email became active.
<code>ActiveToDate</code>	Type date

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The date when the contact's email is no longer active.
BestTimeToContactEndTime	Type time Properties Create, Filter, Nillable, Sort, Update Description The latest time to contact the individual.
BestTimeToContactStartTime	Type time Properties Create, Filter, Nillable, Sort, Update Description The earliest time to contact the individual.
BestTimeToContactTimezone	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The timezone applied to the best time to contact the individual.
EmailAddress	Type email Properties Create, Filter, Group, Sort, Update Description Required. The email address of the contact.
EmailDomain	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The domain of the contact's email, which is everything after the @ sign.
EmailLatestBounceDateTime	Type dateTime

Field	Details
	Properties Create, Filter, Nillable, Sort, Update Description The date and time when an email failed to reach its recipient.
EmailLatestBounceReasonText	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The reason why the email didn't reach its recipient.
EmailMailBox	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A subset of the contact's email, which is everything before the @ sign.
IsPrimary	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether a contact's email is their primary email (<code>true</code>) or not (<code>false</code>).
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.

Field	Details
Name	Type string Properties Filter, Group, idLookup, Nillable, Sort Description Required. The name of the contact point email record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the account's owner associated with this contact. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ParentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the contact's parent. Only an individual or account can be a contact's parent. This is a polymorphic relationship field. Relationship Name Parent Relationship Type Lookup Refers To Account, Individual
UsageType	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description Specify the usage type of this email. For instance, whether it's a work email or a temporary email. Possible values are: • Home • Temp • Work

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ContactPointConsentChangeEvent

Change events are available for the object.

ContactPointEmailHistory

History is available for tracked fields of the object.

ContactPointEmailOwnerSharingRule

Sharing rules are available for the object.

ContactPointEmailShare

Sharing is available for the object.

ContactPointPhone

Represents a contact's phone number, which is associated with an individual or person account. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ActiveFromDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The date when the contact's phone number became active.
ActiveToDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date when the contact's phone number is no longer active.
AreaCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The area code of the phone number's location for the contact.
BestTimeToContactEndTime	Type time Properties Create, Filter, Nillable, Sort, Update Description The latest time to contact the individual.
BestTimeToContactStartTime	Type time Properties Create, Filter, Nillable, Sort, Update Description The earliest time to contact the individual.
BestTimeToContactTimezone	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The timezone applied to the best time to contact the individual.
ExtensionNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The phone number extension for the contact.
FormattedInternationalPhoneNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The internationally recognized format for the contact's phone number.
FormattedNationalPhoneNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The nationally recognized format for the contact's phone number.
IsBusinessPhone	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether a contact's phone number is a business number (<code>true</code>) or not (<code>false</code>).
IsFaxCapable	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether a contact's phone number is a fax number (<code>true</code>) or not (<code>false</code>).
IsPersonalPhone	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether a contact's phone number is a personal number (<code>true</code>) or not (<code>false</code>).
IsPrimary	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Indicates whether a contact's phone number is their primary number (<code>true</code>) or not (<code>false</code>).
IsSmsCapable	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether a contact's phone number can receive text messages (<code>true</code>) or not (<code>false</code>).
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Filter, Group, idLookup, Nillable, Sort Description Required. The name of the contact point phone record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the account's owner associated with this contact. This is a polymorphic relationship field.

Field	Details
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
ParentId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The ID of the contact's parent. Only an individual or account can be a contact's parent. This is a polymorphic relationship field.
	Relationship Name Parent
	Relationship Type Lookup
	Refers To Account, Individual
PhoneType	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The type of phone number for the contact. Possible values are: • Home • Mobile
PreferenceRank	Type int
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specify how this phone numbers ranks in terms of preference among the contact's other phone numbers.
TelephoneNumber	Type phone

Field	Details
	Properties Create, Filter, Group, Sort, Update Description Required. The phone number for the contact.
UsageType	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Specify the usage type of this number. For instance, whether it's a work phone or a home phone. Possible values are: • Home • Temp • Work

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ContactPointConsentChangeEvent

Change events are available for the object.

ContactPointPhoneHistory

History is available for tracked fields of the object.

ContactPointPhoneOwnerSharingRule

Sharing rules are available for the object.

ContactPointPhoneShare

Sharing is available for the object.

ContactPointTypeConsent

Represents consent for a contact point type, such as email or phone. This object is available in API version 45.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available if Data Protection and Privacy is enabled.

Fields

With certain page layout and field-level security settings, some fields aren't visible or editable.

Field Name	Details
BusinessBrandId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the Business Brand that the individual has given consent to for a contact point type. this is a relationship field. This field is available in API version 53.0 and later. Relationship Name BusinessBrand Relationship Type Lookup Refers To BusinessBrand
CaptureContactPointType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Required. Indicates how you captured consent. Possible values are: • Email • MailingAddress • Phone • Social • Web
CaptureDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Required. Date when consent was captured.

Field Name	Details
CaptureSource	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Required. Indicates how you captured consent. For example, a website or online form.
ContactPointType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Required. Represents the contact method you want to apply consent to. Possible values are: • Email • MailingAddress • Phone • Social • Web
DataUsePurposeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Represents the record for data use purpose that you want to associate this consent with. This is a relationship field. Relationship Name DataUsePurpose Relationship Type Lookup Refers To DataUsePurpose
DoubleConsentCaptureDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update

Field Name	Details
	Description Date when double opt-in was captured.
EffectiveFrom	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date when consents starts.
EffectiveTo	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date when consent ends.
EngagementChannelType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Required if a <code>ContactPointType</code> isn't selected. Represents the contact method you want to apply consent to. Possible values are: • <code>Billboard</code> • <code>Email</code> • <code>MailingAddress</code> • <code>Phone</code> • <code>SMS</code> • <code>Social</code> • <code>Web</code> This is a relationship field. Relationship Name <code>EngagementChannelType</code> Relationship Type Lookup Refers To <code>EngagementChannelType</code>

Field Name	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the contact point type consent record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of the account associated with this customer. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PartyId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Sort, Update Description Required. Represents the record based on the Individual object you want to associate consent with. This is a relationship field. Relationship Name Party Relationship Type Lookup Refers To Individual
PartyRoleId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the Party Role for the individual you want to associate consent with. This is a polymorphic relationship field. This field is available in API version 53.0 and later. Relationship Name PartyRole Relationship Type Lookup Refers To Customer, Seller
PrivacyConsentStatus	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Required. Identify whether the individual associated with this record agrees to this form of contact. Possible values are: • NotSeen • Seen • OptIn • OptInPending—Available in API version 58.0 and later. • OptOut • OptOutPending—Available in API version 58.0 and later.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ContactPointConsentChangeEvent (API version 47.0)

Change events are available for the object.

ContactPointTypeConsentHistory

History is available for tracked fields of the object.

ContactPointTypeConsentOwnerSharingRule

Sharing rules are available for the object.

ContactPointTypeConsentShare

Sharing is available for the object.

ContactOwnerSharingRule

Represents the rules for sharing a contact with a User other than the owner.

 **Note:** To enable access to this object for your org, contact Salesforce customer support. However, we recommend that you instead use Metadata API to programmatically update owner sharing rules because it triggers automatic sharing rule recalculation. The [SharingRules](#) Metadata API type is enabled for all orgs.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
ContactAccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A value that represents the type of access granted to the target Group, UserRole, or User for Contacts. The possible values are: - Read - Edit
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description A description of the sharing rule. Maximum size is 1000 characters. This field is available in API version 29.0 and later.
DeveloperName	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Corresponds to Rule Name in the user interface. This field is available in API version 24.0 and later.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance may slow while Salesforce generates one for each record.
GroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the source group. A Contact owned by a User in the source Group triggers the rule to give access.
Name	Type string Properties Create, Filter, Group, Sort, Update Description Label of the sharing rule as it appears in the user interface. Limited to 80 characters. Corresponds to Label on the user interface.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description The ID representing the User or Group being granted access.

Usage

Use this object to manage the sharing rules for contacts.

SEE ALSO:

[Contact](#)

[ContactShare](#)

[Metadata API Developer Guide: SharingRules](#)

ContactRequest

Represents a customer's request for support to get back to them about an issue. This object is available in API version 45.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
<code>AvailableCallbackAttempts</code>	Type integer Properties Create, Filter, Group, Nillable, Sort, Update Description Specifies the number of retries that are possible for a voice callback. Applies to calls routed through Omni-Channel Unified Routing. Valid values are 0 through 5. The default is 0. Available in API version 66.0 and later.
<code>DelayBetweenCallbackAttempts</code>	Type integer Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description Specifies the delay between voice callback attempts in minutes. Applies to calls routed through Omni-Channel Unified Routing. Valid values are 0 through 10,080, and the default is 0. Available in API version 66.0 and later.
IsCallback	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines how a voice call callback is handled after an agent accepts the callback work item. If set to <code>true</code>, when an agent accepts the work item, the Omni-Channel utility doesn't immediately dial the callback phone number. Instead, the agent can determine how to handle the call. For example, after the agent accepts the work item, they can view the callback details, transfer the call, or contact the end user at another phone number. If the agent makes a call by using click-to-dial, the call appears as a Callback call in the Omni-Channel utility. If set to <code>false</code>, when the agent accepts the work item in the Omni-Channel utility, the contact request is opened. The agent can review callback details. If they call with click-to-dial, the call appears as an Outbound call in the Omni-Channel utility. The default value is <code>false</code>. Available in API version 60.0 and later.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (<code>LastReferencedDate</code>) and not viewed.

Field Name	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The contact request number.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the Salesforce record that owns the request. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PreferredChannel	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The channel the customer selected as their preferred method of communication in the contact request flow. For example: • Phone
PreferredPhone	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description The phone number the customer provided when requesting help in the contact request flow.
RequestDescription	Type textarea

Field Name	Details
	Properties Create, Nillable, Update Description The description of the customer's issue that they provided when requesting help in the contact request flow.
RequestReason	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The reason the customer provided when requesting help in the contact request flow. These values are customizable in Object Manager. The default values are: • Account • Billing • Case • General • Order • Other • Product
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The status of the contact request. For example: • Abandoned • Attempted • Contacted • New
WhatId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the Salesforce record the contact request is related to, such as an account, case, opportunity, voice call, or work order. This is a polymorphic relationship field.

Field Name	Details
	Relationship Name What
	Relationship Type Lookup
	Refers To Account, Case, Contact Request, Opportunity, WorkOrder
WhoId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description ID of the Salesforce contact record the contact request is related to, such as a contact, lead, or user. This is a polymorphic relationship field.
	Relationship Name Who
	Relationship Type Lookup
	Refers To Contact, Lead, User

Usage

Contact request records are created when a customer fills out an online form. This form is created using a flow that uses the type `ContactRequestFlow`. There's a guided setup experience to create this flow on the Customer Contact Requests page in Setup. You then add the flow to an Experience Cloud site using either the Flows component or the Contact Request Button & Flow component.

Contact Request works in Experience Cloud sites, whether they require authentication or not. Make sure that your users have the Run Flows permission, including your Guest User profile. Without this permission, members won't see the button or the form to submit contact requests.

By default, all Standard User and System Administrator profiles have access to the object. Make sure that your users profiles, like service agents, have at least read access on the contact request object.

You can create queues for contact requests and route them with Omni-Channel.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[ContactRequestOwnerSharingRule](#)

Sharing rules are available for the object.

ContactRequestShare

Sharing is available for the object.

SEE ALSO:

[Salesforce Help: Set Up and Manage Contact Requests](#)

ContactRequestShare

Represents a list of access levels to a ContactRequest with an explanation of the access level. This object is available in API version 45.0 and later.

You can only create, edit, and delete sharing entries for standard objects whose RowCause field is set to Manual. Sharing entries for standard objects with different RowCause values are created as a result of your Salesforce org’s sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren’t stored at all.

 **Note:** While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it’s possible that we’ll stop storing certain share records to improve performance. As a best practice, don’t create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
AccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Level of access that the User or Group has to contact requests. The possible values are: - Read - Edit - All (This value is not valid for <code>create()</code> or <code>update()</code> calls.) This value must be set to an access level that is higher than the organization’s default access level for contact requests.
ParentId	Type reference Properties Create, Filter, Group, Sort

Field Name	Details
	Description ID of the parent object, if any. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To ContactRequest
RowCause	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is <code>Manual</code>. If no value is specified, the field defaults to <code>Manual</code>. All other <code>RowCause</code> values are read-only. After the sharing entry is created, this field can't be edited. Possible values are: <code>Manual</code>—The User or Group has access because a user with "All" access manually shared the ContactRequest with them. <code>Owner</code>—The User is the owner of the ContactRequest. <code>Rule</code>—The User or Group has access via a ContactRequest sharing rule. <code>GuestRule</code>—The User or Group has access via a ContactRequest guest user sharing rule.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the User or Group that has been given access to the ContactRequest. This is a polymorphic relationship field. Relationship Name UserOrGroup Relationship Type Lookup Refers To Group, User

Usage

This object lets you determine which users and groups can view and edit `ContactRequest` records owned by other users.

If you attempt to create a new record that matches an existing record, the `create()` call updates any modified fields and returns the existing record.

SEE ALSO:

[Salesforce Help: Set Up and Manage Contact Requests](#)

ContactShare

Represents a list of access levels to a Contact along with an explanation of the access level. For example, if you have access to a record because you own it, the `ContactAccessLevel` is `All` and `RowCause` is `Owner`.

You can only create, edit, and delete sharing entries for standard objects whose `RowCause` field is set to `Manual`. Sharing entries for standard objects with different `RowCause` values are created as a result of your Salesforce org's sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren't stored at all.



Note: While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it's possible that we'll stop storing certain share records to improve performance. As a best practice, don't create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

As of Summer '20 and later, only users with access to the Contact object can access this object.

Fields

Field	Details
<code>ContactId</code>	Type reference Properties Filter, Group, Sort Description ID of the Contact associated with this sharing entry. This field can't be updated. This is a relationship field. Relationship Name Contact Relationship Type Lookup

Field	Details
	Refers To Contact
ContactAccessLevel	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Level of access that the User or Group has to cases associated with the account Contact. The possible values are: • Read • Edit • All This value is not valid for create or update. This field must be set to an access level that is higher than the organization's default access level for contacts.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted .
RowCause	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is <code>Manual</code> . If no value is specified, the field defaults to <code>Manual</code> . All other <code>RowCause</code> values are read-only. After the sharing entry is created, this field can't be edited. Valid values include: • <code>Rule</code>—The User or Group has access via a Contact sharing rule. • <code>GuestRule</code>—The User or Group has access via a Contact guest user sharing rule. • <code>ImplicitChild</code>—The User or Group has access to the Contact via sharing access on the associated Account. After faster account sharing recalculation is enabled for your org, sharing entries with this value aren't returned in queries. Instead of storing implicit child shares, record access is determined dynamically. • <code>ImplicitPerson</code>—The User or Group has access to the business contact of a person account via access to the person account itself.

Field	Details
	• <code>GuestPersonImplicit</code>—The guest user has access to the business contact of a person account via a Contact sharing rule. • <code>PortalImplicit</code>—The Contact is associated with the portal user. • <code>LpuImplicit</code>—The User has access to records owned by high-volume Experience Cloud site users via a share group. • <code>ARImplicit</code>—The User, who belongs to a partner or customer account, has access to the Contact via an account relationship data sharing rule. • <code>Manual</code>—The User or Group has access because a User with “All” access manually shared the Contact with them. • <code>Owner</code>—The User is the owner of the Contact.
UserOrGroupId	Type reference Properties Filter, Group, Sort Description ID of the User or Group that has been given access to the Contact. This field can't be updated. This is a polymorphic relationship field. Relationship Name UserOrGroup Relationship Type Lookup Refers To Group, User

Usage

This object allows you to determine which users and groups can view or edit Contact records owned by other users.

 **Note:** After faster account sharing recalculation is enabled for your org, we no longer store implicit share records between accounts and their child contact records. Sharing entries that have a value of `ImplicitChild` in the `RowCause` field aren't returned when you query this object. Instead, the system dynamically determines whether users can access child contact records when they try to access them. This change speeds up ownership and sharing recalculation for accounts.

For more information, see the [Faster Account Sharing Recalculation](#) knowledge article.

SEE ALSO:
[AccountShare](#)

ContactSuggestionInsight

Represents a suggestion for a new contact record. Available in API versions 45.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

To add or decline contact suggestions, users need a Sales Cloud Einstein license and edit access on accounts. As of the Spring '20 release, Pardot and Sales Engagement users no longer have access to this object.

Fields

Field Name	Details
AccountId	Type reference Properties Filter, Group, Sort Description The ID of the related account.
Address	Type address Properties Filter, Nillable Description The address of the suggested contact.
City	Type string Properties Filter, Group, Nillable, Sort Description The city of the suggested contact.
ContactTitle	Type string Properties Filter, Group, Nillable, Sort Description The title of the suggested contact.
Country	Type string

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description The country of the suggested contact.
CreatedRecordId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the created contact record.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
Division	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The division of the suggested contact.
Email	Type email Properties Filter, Group, Nillable, Sort Description The email address of the suggested contact.
FirstName	Type string Properties Filter, Group, Nillable, Sort Description The first name of the suggested contact.

Field Name	Details
GeocodeAccuracy	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Accuracy level of the geocode for the address. See Compound Field Considerations and Limitations for details on geolocation compound fields.  Note: This field is available in the API only.
LastName	Type string Properties Filter, Group, Sort Description The last name of the suggested contact.
LastOperationUserId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user who last performed a related operation.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.

Field Name	Details
Latitude	Type double Properties Filter, Nillable, Sort Description Used in conjunction with <code>Longitude</code> to specify the precise geolocation of an address.
Longitude	Type double Properties Filter, Nillable, Sort Description Used in conjunction with <code>Latitude</code> to specify the precise geolocation of an address.
Phone	Type phone Properties Filter, Group, Nillable, Sort Description The phone number of the suggested contact.
PostalCode	Type string Properties Filter, Group, Nillable, Sort Description The postal code of the suggested contact.
RationaleLabel	Type string Properties Filter, Group, Nillable, Sort Description The reason why this entry is a suggested contact.
State	Type string Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description The state of the suggested contact.
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The status of the suggested contact. Possible values include: • New • Pending • Added • Declined
Street	Type textarea Properties Filter, Group, Nillable, Sort Description The street of the suggested contact.

Usage

This object is read-only and isn't supported in workflows, triggers, process builder, or Visualforce pages.

ContactTag

Associates a word or short phrase with a Contact.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
ItemId	Type reference

Field Name	Details
	Properties Create, Filter Description ID of the tagged item.
Name	Type string Properties Create, Filter Description Name of the tag. If this value does not already exist, a new TagDefinition is created and becomes the parent of this Tag object. Otherwise, a TagDefinition with the same name becomes the parent of this Tag object. Parent relationships are created automatically.
TagDefinitionId	Type reference Properties Filter Description ID of the parent TagDefinition object that owns the tag.
Type	Type picklist Properties Create, Filter, Restricted picklist Description Defines the visibility of a tag. Valid values: • Public—The tag can be viewed and manipulated by all users in an organization. • Personal—The tag can be viewed or manipulated only by a user with a matching OwnerId.

Usage

ContactTag stores the relationship between its parent TagDefinition and the Contact being tagged. Tag objects act as metadata, allowing users to describe and organize their data.

When a tag is deleted, its parent TagDefinition will also be deleted if the name is not being used; otherwise, the parent remains. Deleting a TagDefinition sends it to the Recycle Bin, along with any associated tag entries.

ContentAsset

Represents a Salesforce file that has been converted to an asset file in a custom app in Lightning Experience. Use asset files for org setup and configuration. Asset files can be packaged and referenced by other components. This object is available in API version 38.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. Because changing terms in our code can break current implementations, we maintained this object’s name.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

- Only admin users can edit or delete ContentAssets.
- Users with file access can create and query ContentAssets.
- It isn’t necessary to create asset files for regular, collaborative use of Salesforce Files. “Assetize” files only when they’re used in setup and configuration situations.
- Neither the file (ContentDocument) nor the asset settings record (ContentAssets) can be deleted if the asset file is referenced by another component.
- ContentAsset doesn’t support search or most recently used (MRU) lists.
- ContentAsset doesn’t support Apex triggers.

Fields

Field	Details
ContentDocumentId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the document. This is a relationship field. Relationship Name ContentDocument Relationship Type Lookup Refers To ContentDocument
DeveloperName	Type string

Field	Details
	Properties Create, Filter, Group, Sort, Update Description The unique name of the asset file in the API. ContentAsset.DeveloperName: • must be 40 characters or fewer • must begin with a letter • can contain only underscores and alphanumeric characters • can't include spaces • can't end with an underscore • can't contain 2 consecutive underscores In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.
IsVisibleByExternalUsers	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether unauthenticated users can see the asset file.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language for this document. This field defaults to the user's language unless the org is multi-language enabled. Specifies the language of the labels returned. The value must be a valid user locale (language and country), such as <code>de_DE</code> or <code>en_GB</code>. For more information on locales, see the <code>Language</code> field on the <code>CategoryNodeLocalization</code> object.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The label for the asset file. This internal label doesn't get translated.
NamespacePrefix	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort
	Description The namespace prefix associated with this object. Each Developer Edition organization that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation.

ContentBody

Represents the body of a file in Salesforce CRM Content or Salesforce Files. This object is available in API version 40.0 and later.

Supported Calls

`describeSObjects()`

Special Access Rules

Cannot be queried, inserted, updated, or deleted directly.

Fields

Field	Details
Id	Type ID
	Properties , Filter, Group, idLookup, Sort
	Description ID of the file body.

Usage

ContentBody is intended for internal Salesforce use. If you need to access the file content body, please use [ContentVersion](#) on page 1528.

ContentDistribution

Represents information about sharing a document externally. This object is available in API version 32.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- Content deliveries must be enabled to query content deliveries.
- Users (including users with the “View All Data” permission) can query only the files that they have access to. If the file is managed by a Content Library, the user must have “Deliver Content” enabled in the library permission definition and be a member of the library. If the file isn’t managed by a Content Library, the user must have the “Enable Creation of Content Deliveries for Salesforce Files” permission.
- Users can query the `DistributionPublicUrl` and `Password` fields only if they are the file owner, if the file is shared with them, or if the `RelatedRecordId` specifies a record that the users can access.
- If the shared document is deleted, the delete cascades to any associated `ContentDistribution`. The `ContentDistribution` is still queryable by using the `QueryAll` verb.
- If the shared document is archived, the only fields that users can edit are `ExpiryDate` and `PreferencesExpires`.
- Customer Portal users can’t access this object.
- Guest users of Experience Cloud sites can’t access or create this object.
- Chatter Free users can’t access this object.

Fields

Field Name	Details
<code>ContentDocumentId</code>	Type reference Properties Filter, Group, Nillable, Sort Description ID of the shared document.
<code>ContentDownloadUrl</code>	Type string Properties Sort, Nillable Description The link for downloading the file. This field is available in API version 40.0 and later.
<code>ContentVersionId</code>	Type reference Properties Create, Filter, Group, Sort

Field Name	Details
	Description ID of the shared document version. This is a relationship field. Relationship Name ContentVersion Relationship Type Lookup Refers To ContentVersion
DistributionPublicUrl	Type string Properties Nillable, Sort Description URL of the link to the shared document.
ExpiryDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date when the shared document becomes inaccessible.
FirstViewDate	Type dateTime Properties Filter, Nillable, Sort Description Date when the shared document is first viewed.
LastViewDate	Type dateTime Properties Filter, Nillable, Sort Description Date when the shared document was last viewed.
Name	Type string

Field Name	Details
	Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the content delivery.
OwnerId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the user who owns the shared document. This is a relationship field. Relationship Name Owner Relationship Type Lookup Refers To User
PdfDownloadUrl	Type string Properties Sort, Nillable Description The link for downloading the file as a PDF. This field is available in API version 40.0 and later.
Password	Type string Properties Group, Nillable, Sort Description A password that allows access to a shared document.
PreferencesAllowOriginalDownload	Type boolean Properties Create, Filter, Update Description When <code>true</code> , the shared document can be downloaded as the file type that it was uploaded as.

Field Name	Details
	When <code>false</code>, download availability depends on whether a preview of the file exists. If a preview exists, the file can't be downloaded. If a preview doesn't exist, the file can still be downloaded. If the shared document is a link, it can't be downloaded.
PreferencesAllowPDFDownload	Type boolean Properties Create, Filter, Update Description When <code>true</code>, the shared document can be downloaded as a PDF if the original file type is PDF or if a PDF preview has been generated.
PreferencesAllowViewInBrowser	Type boolean Properties Create, Filter, Update Description When <code>true</code>, a preview of the shared document can be viewed in a Web browser.
PreferencesExpires	Type boolean Properties Create, Filter, Update Description When <code>true</code>, access to the shared document expires on the date that's specified by <code>ExpiryDate</code>.
PreferencesLinkLatestVersion	Type boolean Properties Create, Filter, Update Description When <code>true</code>, users see the most recent version of a shared document. When <code>false</code>, users see the version of the document that's shared, even if it isn't the most recent version.
PreferencesNotifyOnVisit	Type boolean Properties Create, Filter, Update

Field Name	Details
	Description When <code>true</code> , the owner of the shared document is emailed the first time that someone views or downloads the shared document.
PreferencesNotifyRndtnComplete	Type boolean Properties Create, Filter, Update Description When <code>true</code> , the owner of the shared document is emailed when renditions of the shared document that can be previewed in a Web browser are generated.
PreferencesPasswordRequired	Type boolean Properties Create, Filter, Update Description When <code>true</code> , a password, specified by <code>Password</code> , is required to access the shared document.
RelatedRecordId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the record, such as an Account, Campaign, or Case, that the shared document is related to. This is a polymorphic relationship field. Relationship Name RelatedRecord Relationship Type Lookup Refers To Account, Campaign, Case, Contact, EmailMessage, Lead, ListEmail, Opportunity
ViewCount	Type int Properties Filter, Group, Nillable, Sort Description The number of times that the shared document has been viewed.

Usage

Use this object to create, update, delete, or query information about a document shared externally via a link or via Salesforce CRM Content delivery.

The ContentDistribution object supports triggers before and after these operations: insert, update, delete. It supports triggers after undelete.



Example: The VP of Marketing wants file authors to specify whether their files can be shared with external people using content delivery. He also wants some files to have a password. You can add a custom field `DeliveryPolicy` on the ContentVersion object. Make the custom field a picklist with the values, `Allowed`, `Blocked`, and `Password required`. Add the field to the ContentVersion layout so that the user can set the delivery policy per file. Then, add an insert trigger for the ContentDistribution object to enforce the rules based on the delivery policy set in the file.



Note: The `ContentVersionId` for ContentDistribution must be unique.

This trigger for the ContentDistribution object enforces the delivery policy rules for each file:

```
trigger deliveryPolicy on ContentDistribution (before insert) {
    for (ContentDistribution cd : trigger.new) {
        String versionId = DeliveryPolicyHelper.getContentVersionId(cd);
        ContentVersion version = [select DeliveryPolicy__c from ContentVersion where
Id = :versionId];
        String policy = version.DeliveryPolicy__c;
        if (policy.equals('Blocked')) {
            cd.addError('This file is not allowed to be delivered.');
```

The trigger calls this helper class:

```
public class DeliveryPolicyHelper {
    public static String getContentVersionId(ContentDistribution cd) {
        if (cd.ContentVersionId != null) {
            return cd.ContentVersionId;
        } else {
            String versionId = [select LatestPublishedVersionId from ContentDocument
where Id = :cd.ContentDocumentId].get(0).LatestPublishedVersionId;
            return versionId;
        }
    }

    public static boolean requirePassword(ContentDistribution cd) {
        return cd.PreferencesPasswordRequired;
    }
}
```



Important: Apex has a per organization limit of 10 concurrent requests that last longer than 5 seconds. A trigger that uploads files can easily hit this limit.

ContentDistributionEventLog

Content Distribution events contain information about content distributions and deliveries to users. This object is available in API version 65.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
Action	Typestring PropertiesFilter, Group, Nillable, Sort DescriptionThe action that’s used when a delivery is viewed.
DeliveryIdentifier	Typestring PropertiesFilter, Group, Nillable, Sort DescriptionThe 15-character ID of the content delivery.
DeliveryLocation	Typestring PropertiesFilter, Group, Nillable, Sort DescriptionThe location of the delivery.
RelatedObjectIdentifier	Typestring PropertiesFilter, Group, Nillable, Sort

Field	Details
	Description The 15-character ID of the record that's associated with the delivery distribution.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 20130715233322.670.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.
VersionIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the content version.

ContentDistributionView

Represents information about views of a shared document. This read-only object is available in API version 32.0 and later.

Supported Calls

`delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`

Special Access Rules

- Content deliveries must be enabled to query content deliveries.
- Users (including users with the “View All Data” permission) can query only the files that they have access to. If the file is managed by a Content Library, the user must have “Deliver Content” enabled in the library permission definition and be a member of the library. If the file isn’t managed by a Content Library, the user must have the “Enable Creation of Content Deliveries for Salesforce Files” permission.
- ContentDistributionView can be deleted by an admin.
- If the shared document is deleted, the delete cascades to any associated ContentDistributionView. The ContentDistributionView is still queryable by using the `QueryAll` verb.
- Customer Portal users can’t access this object.
- Chatter Free users can’t access this object.

Fields

Field Name	Details
DistributionId	Type reference Properties Filter, Group, Sort Description ID of the content delivery that the document is part of. This is a relationship field. Relationship Name Distribution Relationship Type Lookup Refers To ContentDistribution
IsDownload	Type boolean Properties Defaulted on create, Filter, Group, Sort Description <code>true</code> if the shared document is downloaded; <code>false</code> if the shared document is viewed.
IsInternal	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field Name	Details
	Description <code>true</code> if the shared document is viewed by a user in the same organization; <code>false</code> if viewed by an external user.
ParentViewId	Type reference Properties Filter, Group, Nillable, Sort Description ID of this instance of accessing the shared document.

Usage

Use this read-only object to query information about users who are accessing shared documents.

ContentDocument

Represents a document that was uploaded to a library in Salesforce Files or Salesforce CRM content. This object is available in versions 17.0 and later for Salesforce CRM. This object is available in API version 21.0 and later for Salesforce Files.

The maximum number of documents that can be published is 30,000,000. Archived files count toward this limit and toward storage usage limits.

- Contact Manager, Group, Professional, Enterprise, Unlimited, and Performance Edition customers can publish a maximum of 200,000 new versions per 24-hour period.
- Developer Edition and trial users can publish a maximum of 2,500 new versions per 24-hour period.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`

Special Access Rules

- By default, users (including users with the View All Data permission) can only query files they have access to, including:
 - Salesforce files in their personal library and in libraries they're a member of, regardless of library permissions (API version 17.0 and later).
 - Salesforce files they own, shared directly with them, posted on their profile, or posted on groups they can see (API version 21.0 and later).

Turn on the Query All Files permission to let your View All Data users bypass the restrictions on querying files.

- Query All Files returns all files, including files in non-member libraries and files in unlisted groups.
- Users can't edit, upload new versions, or delete files they don't have access to.
- View All Data permission is required to enable Query All Files.

- For API version 62.0 and later, enable the Query Non Vetoed Files permission in Data Cloud orgs to let your integration or API users view and SOQL query only public and non-vetoed files in the org.
- Customer and partner portal users must have the View Content in Portal permission to query content in libraries where they have access.
- A Salesforce CRM content document can be deleted if any of these statements is true.
 - The document is published into a personal library or is in the user's upload queue.
 - The document is published into a public library, the user trying to delete the document is the file owner, and is a member of that library.
 - The document is published into a public library and the user trying to delete the document isn't the owner but has the Manage Library or Delete Content library permission enabled.

For API version 25.0 and later, you can change ownership of Salesforce Files and Salesforce CRM content documents.

- A user can change ownership of a Salesforce CRM content document or Salesforce file if any of these statements is true.
 - The user is the current owner.
 - The user has the Modify All Data permission enabled.
 - For a file in a Content Library, the user either has the Manage Salesforce CRM content permission enabled, or has the Manage Library permission enabled for the library containing the document.
-  **Note:** When the owner of a ContentDocument is changed, [ContentDocumentLink](#) may be triggered. This action deletes the ContentDocumentLink to the old owner and inserts one to the new owner. When you change document ownership, keep these considerations in mind.
- The user who's becoming the document owner must be a visible, active user. The original owner can be inactive.
 - If the new document owner doesn't have access to the library that contains the document, library administrators must give the new owner membership to the library.

Fields

Field	Details
ArchivedById	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user who archived the document. This field is available in API version 24.0 and later.
ArchivedDate	Type date Properties Filter, Group, Nillable, Sort Description The date when the document was archived.

Field	Details
	This field is available in API version 24.0 and later.
ContentAssetId	Type reference Properties Filter, Group, Nillable, Sort, Update Description If the ContentDocument is an asset file, this field points to the asset. For most entities, the value of this field is <code>null</code>. This field is available in API version 38.0 and later. This is a relationship field. Relationship Name ContentAsset Relationship Type Lookup Refers To ContentAsset
ContentModifiedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the document was modified. ContentModifiedDate updates when, for example, the document is renamed or a new document version is uploaded. When you're uploading the first version of a document, ContentModifiedDate can be set to the current time or anytime in the past. This field is available in API version 32.0 and later.
ContentSize	Type int Properties Filter, Group, Nillable, Sort Description The size of the document in bytes for documents smaller than 2 GB. This field is available in API version 31.0 and later. In API version 65.0 and later, we recommend that you use the ContentSizeLong field even for files smaller than 2 GB.
ContentSizeLong	Type long

Field	Details
	Properties Filter, Group, Nillable, Sort Description The size of the document in bytes up to 10 GB. This field is available in API version 65.0 and later.
Description	Type textarea Properties Filter, Nillable, Sort, Update Description A description of the document. This field is available in API version 31.0 and later.
Division	Type picklist Properties Defaulted on Create, Filter, Group, Restricted picklist, Sort Description A logical segment of your organization's data. For example, if your company is organized into different business units, you could create a division for each business unit, such as "North America," "Healthcare," or "Consulting." Available only if the organization has the Division permission enabled.
FileExtension	Type string Properties Filter, Group, Nillable, Sort Description File extension of the document. This field is available in API version 31.0 and later.
FileType	Type string Properties Filter, Group, Nillable, Sort Description Type of document, determined by the file extension. This field is available in API version 31.0 and later.

Field	Details
IsArchived	Type boolean Properties Defaulted on Create, Filter, Group, Sort, Update Description Indicates whether the document was archived (<code>true</code>) or not (<code>false</code>).
IsInternalOnly	Type boolean Properties Defaulted on Create, Filter, Group, Sort, Update Description Indicates that a file is for internal use only. When <code>true</code>, prevents users with the Query Non Vetoed Files permission from viewing and performing SOQL query on public and non vetoed files in a Data Cloud org. Default value is <code>false</code>. This field is available in API version 62.0 and later.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (<code>LastReferencedDate</code>) and not viewed.
LatestPublishedVersionId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the latest document version (<code>ContentVersion</code>). This is a relationship field. Relationship Name LatestPublishedVersion

Field	Details
	Relationship Type Lookup Refers To ContentVersion
MalwareScanDate (Beta)	Type dateTime Properties Filter, Group, Nillable, Sort Description The date the document was scanned for malware. This field is available as a beta feature in API version 66.0 and later.  Note: The MalwareScanDate field is a pilot or beta service that is subject to the Beta Services Terms at Agreements - Salesforce.com or a written Unified Pilot Agreement if executed by Customer, and applicable terms in the Product Terms Directory . Use of this pilot or beta service is at the Customer's sole discretion.
MalwareScanStatus (Beta)	Type picklist Properties Filter, Group, Sort Description Indicates whether the document was scanned for malware and whether it's safe or malicious. This field is available in API version 66.0 and later. • NotScanned—The file hasn't yet been scanned for malware. This is the default value. • Scheduled—The file scan is in progress. • Clean—The file was scanned and doesn't contain malware. • Malicious—The file was scanned and contains malware. • Skipped—The file can't be scanned because it's either larger than 100 MB or it's a Salesforce-generated file, such as a Content Note. • Failed—The file wasn't scanned because of an error.  Note: The MalwareScanStatus field is a pilot or beta service that is subject to the Beta Services Terms at Agreements - Salesforce.com or a written Unified Pilot Agreement if executed by Customer, and applicable terms in the Product Terms Directory . Use of this pilot or beta service is at the Customer's sole discretion.
OwnerId	Type reference Properties Filter, Group, Sort, Update

Field	Details
	Description ID of the owner of this document. This is a relationship field. Relationship Name Owner Relationship Type Lookup Refers To User
ParentId	Type reference Properties Filter, Group, Nillable, Sort, Update Description ID of the library that owns the document. Created automatically when inserting a ContentVersion via the API for the first time. This field is available in API version 24.0 and later when Salesforce CRM content is enabled.
PublishStatus	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Indicates if and how the document is published. Valid values are: • P—The document is published to a public library and is visible to other users. Label is Public. • R—The document is published to a personal library and is not visible to other users. Label is Personal Library. • U—The document is not published because publishing was interrupted. Label is Upload Interrupted.
SharingOption	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Controls whether sharing is frozen for a file. Only administrators and file owners with Collaborator access to the file can modify this field. Default is Allowed, which means that new shares are allowed. When set to Restricted, new shares are prevented without affecting existing shares.

Field	Details
	This field is available in API versions 35.0 and later.
SharingPrivacy	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Controls sharing privacy for a file. Only administrators and file owners with Collaborator access to the file can modify this field. Valid values are: • N—Default. Label is Visible to Anyone With Record Access • P—The file is private on records but can be shared selectively with others. Label is Private on Records. This field is available in API versions 41.0 and later.
Title	Type string Properties Filter, Group, idLookup, Sort, Update Description The title of a document.

Usage

- Use this object to retrieve, query, update, and delete the latest version of a document in a library or a Salesforce file. Use the `ContentVersion` object to create, query, retrieve, search, edit, and update a specific version of a Salesforce CRM content document or Salesforce file.
- A document record is a container for multiple version records. You create a version to add a document to the system. The new version contains the actual file data which allows the document to have multiple versions. The version stores the body of the uploaded document.
- To create a document, create version via the `ContentVersion` object without setting the `ContentDocumentId`. This process automatically creates a parent document record. When adding a new version of the document, you must specify an existing `ContentDocumentId` which initiates the revision process for the document. When the latest version is published, the title, owner, and publish status fields are updated in the document.
- You can't add new versions of archived documents.
- When you delete a document, all versions of that document are deleted, including ratings, comments, and tags.
- A `ContentDocument` insert trigger executes when a file (`ContentDocument`) is added to the file library.
- A `ContentDocument` delete trigger executes when a file is deleted, but the cascaded `ContentDocumentLink` delete does not trigger `ContentDocumentLink` triggers.
- The `query()` call doesn't return archived documents. The `queryAll()` call returns archived documents.

- To query a file that is accessible only through a record share, you must specify the content ID of the file. When SOQL querying the `ContentDocument` object, the `ContentDocumentId` must be compounded by an AND operator.

For example,

```
SELECT Id, Title FROM ContentDocument
WHERE (Id = '<ContentDocumentId>' and Title LIKE '%<title>%')
```

```
SELECT Id, Title, MyCustomField_c FROM ContentDocument
WHERE (Id IN ('<Id1>', '<Id2>')) AND (Title LIKE '%<title1>%' OR (Title LIKE '%<title2>%'))
```

- If you query versions in the API, versions with a `PublishStatus` of `Upload Interrupted` are not returned.
- Assign topics to `ContentDocument` using `TopicAssignment` in API version 37.0 or later.

Associated Objects

This object has the following associated objects. Unless noted, associated objects are available in the same API version as this object.

[ContentDocumentChangeEvent](#) on page 68 (API version 55.0)

Change events are available for the object.

[ContentDocumentFeed](#) (API version 20.0)

Feed tracking is available for the object.

[ContentDocumentHistory](#)

History is available for tracked fields of the object.

SEE ALSO:

[ContentDocumentHistory](#)

[ContentVersion](#)

ContentDocumentHistory

Represents the history of a document. This object is available in versions 17.0 and later.

Supported Calls

`describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Special Access Rules

- Customer and Partner Portal users must have the “View Content in Portal” permission to query content in libraries where they have access.
- A user can query all versions of a document from their personal library and any version that is part of or shared with a library where they are a member, regardless of library permissions.

Fields

Field	Details
ContentDocumentId	Type reference Properties Filter, Group, Sort Description ID of the document. This is a relationship field. Relationship Name ContentDocument Relationship Type Lookup Refers To ContentDocument
DataType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Data type of the field that was changed.
Division	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description A logical segment of your organization's data. For example, if your company is organized into different business units, you could create a division for each business unit, such as "North America," "Healthcare," or "Consulting." Available only if the organization has the Division permission enabled.
Field	Type picklist Properties Filter, Group, Sort, Restricted picklist Description The name of the field that was changed. Possible values include: • <code>contentDocPublished</code>—The document is published into a library.

Field	Details
	• <code>contentDocUnpublished</code>—The document is archived or removed from a library, either directly or when the owning library is changed. • <code>contentDocRepublished</code>—The document is removed from the archive. • <code>contentDocFeatured</code>—The document is featured. • <code>contentDocSubscribed</code>—The document is subscribed to. • <code>contentDocUnsubscribed</code>—The document is no longer subscribed to.
NewValue	Type anyType Properties Nillable, Sort Description The new value of the field that was changed.
OldValue	Type anyType Properties Nillable, Sort Description The latest value of the field before it was changed.

Usage

Use this read-only object to query the history of a document.

SEE ALSO:

[ContentDocument](#)

ContentDocumentLink

Represents the link between a Salesforce CRM Content document, Salesforce file, or ContentNote and where it's shared. A file can be shared with other users, groups, records, and Salesforce CRM Content libraries. This object is available in versions 21.0 and later for Salesforce CRM Content documents and Salesforce Files.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

- In API versions 59.0 and later, turn on the Query All Files permission to query without a filter on `id`, `LinkedEntityId`, and `documentID` fields. The View All Data permission is required to turn on Query All Files.
- In API versions 33.0 and later, you can create and delete ContentDocumentLink objects with a `LinkedEntityId` of any record type that can be tracked in the feed, even if feed tracking is disabled for that record type.
- In API versions 25.0 and later, you can create ContentDocumentLink objects with a `LinkEntityId` of type User, CollaborationGroup, or Organization.
- In API versions 21.0 and later, users with explicit Viewer access (the file has been directly shared with the user) to a file can delete ContentDocumentLink objects between the file and other users who have Viewer access. In the same API versions, any user with Viewer access to a file can delete ContentDocumentLink objects between the file and organizations or groups of which they're a member.
- For orgs with Digital Experiences enabled, a document can be shared with only users and groups that are a part of the Experience Cloud site the file was created in.

Fields

Field	Details
ContentDocumentId	Type reference Properties Create, Filter, Group, Sort Description ID of the document. This is a relationship field. Relationship Name ContentDocument Relationship Type Lookup Refers To ContentDocument
LinkedEntityId	Type reference Properties Create, Filter, Group, Sort Description ID of the linked object. Can include Chatter users, groups, records (any that support Chatter feed tracking including custom objects), and Salesforce CRM Content libraries. Using the API only, you can relate notes to custom settings. This is a polymorphic relationship field.

Field**Details****Relationship Name**

LinkedEntity

Relationship Type

Lookup

Refers To

Account, Accreditation, ActivationTarget, ActivationTrgtIntOrgAccess, ApiAnomalyEventStore, AssessmentIndicatorDefinition, AssessmentTask, AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskIndDefinition, AssessmentTaskOrder, Asset, AssetRelationship, AssignedResource, Award, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, Campaign, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis, CareInterventionType, CareMetricTarget, CareObservation, CareObservationComponent, CarePgmProvHealthcareProvider, CarePreauth, CarePreauthItem, CareProgram, CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee, CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider, CareProgramTeamMember, CareProviderAdverseAction, CareProviderFacilitySpecialty, CareProviderSearchableField, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareSpecialtyTaxonomy, CareTaxonomy, Case, CodeSet, CollaborationGroup, CommSubscription, CommSubscriptionChannelType, CommSubscriptionConsent, CommSubscriptionTiming, ConsumptionSchedule, Contact, ContactEncounter, ContactEncounterParticipant, ContentWorkspace, Contract, ConversationEntry, CoverageBenefit, CoverageBenefitItem, CredentialStuffingEventStore, CreditMemo, CreditMemoLine, Dashboard, DashboardComponent, DataStream, DelegatedAccount, DocumentChecklistItem, EmailMessage, EmailTemplate, EngagementChannelType, EnhancedLetterhead, EnrollmentEligibilityCriteria, Event, HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, Identifier, Image, IndividualApplication, Invoice, InvoiceLine, Lead, ListEmail, Location, MarketSegment, MarketSegmentActivation, MemberPlan, MessagingSession, MktCalculatedInsight, OperatingHours, Opportunity, Order, OrderItem, Organization, OtherComponentTask, OutgoingEmail, PartyConsent, PersonEducation, PersonLanguage, PersonLifeEvent, PersonName, PlanBenefit, PlanBenefitItem, Product2, ProductFulfillmentLocation, ProductItem, ProductItemTransaction, ProductRequest, ProductRequestLineItem, ProductRequired, ProductTransfer, ProfileSkill, ProfileSkillEndorsement, ProfileSkillUser, ProviderSearchSyncLog, PurchaserPlan, PurchaserPlanAssn, ReceivedDocument, Report, ReportAnomalyEventStore, ResourceAbsence, ResourcePreference, ReturnOrder, ReturnOrderLineItem, ServiceAppointment, ServiceResource, ServiceResourceSkill, ServiceTerritory, ServiceTerritoryMember, ServiceTerritoryWorkType, SessionHijackingEventStore, Shift, Shipment, ShipmentItem, Site, SkillRequirement, SocialPost, Solution, Task, ThreatDetectionFeedback, Topic, User, Visit, VisitedParty, Visitor, VoiceCall, VolunteerProject, WorkBadgeDefinition, WorkOrder, WorkOrderLineItem, WorkType, WorkTypeGroup, WorkTypeGroupMember

Field	Details
ShareType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Required. The permission granted to the user of the shared file in a library. This is determined by the permission the user already has in the library. This field is available in API version 25.0 and later. V Viewer permission. The user can explicitly view but not edit the shared file. C Collaborator permission. The user can explicitly view and edit the shared file. You can retrieve the ShareType for ContentDocumentLink, but you can't create a ContentDocumentLink with a ShareType of C from an Apex trigger. I Inferred permission. The user's permission is determined by the related record. For shares with a library, this is defined by the permissions the user has in that library. Inferred permission on shares with libraries and file owners is available in API versions 21.0 and later. Inferred permission on shares with standard objects is available in API versions 36.0 and later. Inferred permission can't be used on shares with the Organization object.
Visibility	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Specifies whether this file is available to all users, internal users, or shared users. This field is available in API version 26.0 and later. Valid values are: • AllUsers—The file is available to all users who have permission to see the file. • InternalUsers—The file is available only to internal users who have permission to see the file. • SharedUsers—The file is available to all users who can see the feed to which the file is posted. SharedUsers is used only for files shared with users, and is available only when an org has private org-wide sharing on by default. The SharedUsers value is available in API version 32.0 and later. Note the following exceptions for Visibility. • AllUsers & InternalUsers values apply to files posted on standard and custom object records, but not to users, groups, or content libraries. • For posts to a record feed, Visibility is set to InternalUsers for all internal users by default.

Field	Details
	- External users can set <code>Visibility</code> only to <code>AllUsers</code>. - On user and group posts, only internal users can set <code>Visibility</code> to <code>InternalUsers</code>. - For posts to a user feed, if the organization-wide default for user sharing is set to private, <code>Visibility</code> is set to <code>SharedUsers</code>. - Only internal users can update <code>Visibility</code>. <code>Visibility</code> can be updated on links to files posted on standard and custom object records, but not to users, groups, or content libraries. <code>Visibility</code> is updatable in API version 43.0 and later. The visibility setting on <code>ContentDocumentLink</code> determines a file's visibility on a record post. When a file has multiple references posted in a feed, the file's visibility is determined by the most visible setting.

Usage

Use this object to query the locations where a file is shared or query which files are linked to a particular location. For example, the following query returns a particular document shared with a Chatter group:

```
SELECT ContentDocument.title FROM ContentDocumentLink WHERE ContentDocumentId =
'069D00000000so2' AND LinkedEntityId = '0D5000000089123'
```

- You can't run a query without filters against `ContentDocumentLink`.
- You can't filter on `ContentDocument` fields if you're filtering by `ContentDocumentId`. You can only filter on `ContentDocument` fields if you're filtering by `LinkedEntityId`.
- You can't filter on the related object fields. For example, you can't filter on the properties of the account to which a file is linked. You can filter on the properties of the file, such as the title field.

A SOQL query must filter on one of `Id`, `ContentDocumentId`, or `LinkedEntityId`.

The `ContentDocumentLink` object supports triggers before and after these operations: insert, update, delete. A `ContentDocumentLink` trigger executes whenever there is an addition or deletion of the `ContentDocumentLink`. When a file is deleted, a `ContentDocument` delete trigger executes, but the cascaded `ContentDocumentLink` delete does not trigger `ContentDocumentLink` triggers.



Example: This trigger for the `ContentDocumentLink` object prevents public XLSX files from being shared.

```
trigger NoShareXLSX on ContentDocumentLink (after insert) {
    for (ContentDocumentLink cdl : trigger.new) {
        if (!CDLHelper.isSharingAllowed(cdl)) {
            cdl.addError('Sorry, you cannot share this file.');
        }
    }
}
```

The trigger calls this helper class.

```
public class CDLHelper {

    /**
     * Gets FileExtension of the inserted content.
```

```

    */
    public static String getFileExtension(ContentDocumentLink cdl) {
        String fileExtension;
        String docId = cdl.ContentDocumentId;
        FileExtension = [select FileExtension from ContentVersion where ContentDocumentId
= :docId].get(0).FileExtension;
        return FileExtension;
    }

    /**
     * Checks the file's PublishStatus and FileExtension to decide whether user can
share the file with others.
     * PublishStatus 'P' means the document is in a public library.
     */
    public static boolean isSharingAllowed(ContentDocumentLink cdl) {
        String docId = cdl.ContentDocumentId;
        ContentVersion version = [select PublishStatus,FileExtension from ContentVersion
where ContentDocumentId = :docId].get(0);
        if (version.PublishStatus.equals('P') && (version.FileExtension != null &&
version.FileExtension.equals('xlsx'))) {
            return false;
        }
        return true;
    }

    /**
     * Gets the parent account name if the file is linked to an account.
     */
    public static String getAccountName(ContentDocumentLink cdl) {
        String name;
        String id = cdl.LinkedEntityId;
        if (id.substring(0,3) == '001') {
            name = [select Name from Account where Id = :id].get(0).Name;
        }
        return name;
    }
}

```

 **Important:** Apex has a per organization limit of 10 concurrent requests that last longer than 5 seconds. A trigger that uploads files, like bulk `ContentVersion` creation, can easily hit the SOQL queries limit.

Associated Objects

This object has the following associated objects. Unless noted, associated objects are available in the same API version as this object.

ContentDocumentLinkChangeEvent on page 68 (API version 55.0)

Change events are available for the object.

SEE ALSO:

[ContentDocument](#)

ContentDocumentListViewMapping

Represents an association between a ListView and a Quip ContentDocument. Applies to Quip file types only. Maintains the mapping between a list view and Quip document when the list view is exported to a newly created Quip document. This object is available in API version 44.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To use this object, the Files Connect and Quip permissions must be enabled in the org.

To insert and update this object through the API, the QuipMassAction gater permission must also be enabled.

Fields

Field	Details
ContentDocumentId	Type reference Properties Create, Filter, Group, Sort Description ID of the document.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this document.
ListViewId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort
	Description ID of the list view associated with the document.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description Name of the document.

Usage

ContentDocumentListViewMapping is used primarily by the Quip list view integration feature. Only Quip file types (Quip sheets and docs) are supported. The ContentDocumentId field must point to a Quip file.

ContentDocumentSubscription

Represents a subscription for a user following or commenting on a file in a library. This object is available in API version 42.0 and later.

Supported Calls

`delete()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Only users with Modify All Data permission have access to this object.

Fields

Field	Details
ContentDocumentId	Type reference
	Properties Filter, Group, Sort
	Description ID of the file. This is a relationship field.

Field	Details
	Relationship Name ContentDocument
	Relationship Type Lookup
	Refers To ContentDocument
IsCommentSub	Type boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Specifies whether the user made comments on the file.
IsDocumentSub	Type boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Specifies whether the user follows the file.
UserId	Type reference
	Properties Filter, Group, Sort
	Description ID of the user following or commenting on the file. This is a relationship field.
	Relationship Name User
	Relationship Type Lookup
	Refers To User

ContentDocLinkEventLog

Content Document Link events contain sharing information for content documents. This object is available in API version 65.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
<code>DocumentIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the document that's being shared.
<code>RequestIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.
<code>SharedWithObjectIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description Who the document was shared with.
<code>SharingOperation</code>	Type string Properties Filter, Group, Nillable, Sort Description The type of sharing operation on the document. Possible Values • INSERT • UPDATE

Field	Details
	DELETE
SharingPermission	Type string Properties Filter, Group, Nillable, Sort Description What permissions the document was shared with. Possible Values ∇: Viewer - C: Collaborator ⌵: Inferred—that is, the sharing permissions were inferred from a relationship between the viewer and document. For example, a document’s owner has a sharing permission to the document itself. Or, a document can be a part of a content collection, and the viewer has sharing permissions to the collection rather than explicit permissions to the document directly.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who’s using Salesforce services through the UI or the API. For example: 005300000009M943

ContentFolder

Represents a folder in a content library for adding files. This object is available in API version 34.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- Salesforce CRM Content or Chatter must be enabled to access ContentFolder.
- All users with a content feature license can modify folders in their personal library.
- To modify a folder, the user must be a member of the library and have permission to modify folders.

Fields

Field Name	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the folder.
ParentContentFolderId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the ParentFolder. This is a relationship field. Relationship Name ParentContentFolder Relationship Type Lookup Refers To ContentFolder

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ContentFolderChangeEvent (API version 62.0)

Change events are available for the object.

ContentFolderItem

Represents a file (ContentDocument) or folder (ContentFolder) that resides in a ContentFolder in a ContentWorkspace. This object is available in API version 35.0 and later.

Supported Calls

`describeSObjects()`, `describeLayout()`, `query()`, `retrieve()`

Special Access Rules

Fields

Field Name	Details
ContentSize	Type int Properties Filter, Group, Nillable, Sort Description The size of the file or folder in bytes, when the size is smaller than 2 GB. In API version 66.0 and later, we recommend that you use the <code>ContentSizeLong</code> field even for files smaller than 2 GB.
ContentSizeLong	Type long Properties Filter, Group, Nillable, Sort Description The size of the file or folder in bytes up to 10 GB. This field is available in API version 66.0 and later.
FileExtension	Type string Properties Filter, Group, Nillable, Sort Description Specifies the file extension if the ContentFolderItem is a file.
FileType	Type string

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description Specifies the type of file if the ContentFolderItem is a file.
IsFolder	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates that the ContentFolderItem is a folder, and not a file.
ParentContentFolderId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the ContentFolder that the ContentFolderItem resides in. This is a relationship field. Relationship Name ParentContentFolder Relationship Type Lookup Refers To ContentFolder
Title	Type string Properties Filter, Group, Sort Description The name of the file or folder.

ContentFolderLink

Defines the association between a library and its root folder. This object is available in API version 34.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

- Salesforce CRM Content must be enabled to access ContentFolderLink.
- ContentFolderLink is read-only in the context of a library.

Fields

Field Name	Details
ContentFolderId	Type reference Properties Filter, Group, Sort Description ID of the folder. This is a relationship field. Relationship Name ContentFolder Relationship Type Lookup Refers To ContentFolder
EnableFolderStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the status of enabling folders for the library. Valid values are: • C — Completed folder enablement • S — Started folder enablement • F — Failed folder enablement This field is available in API version 39.0 and later.
ParentEntityId	Type reference Properties Filter, Group, Sort

Field Name	Details
	Description Name of the entity the folder hierarchy is linked to.

ContentFolderMember

Defines the association between a file and a folder. This object is available in API version 34.0 and later.

Supported Calls

`describeSObjects()`, `delete()`, `query()`, `retrieve()`, `update()`

Special Access Rules

- Salesforce CRM Content or Chatter must be enabled to access ContentFolderMember.
- All users with a content feature license can modify folders in their personal library.
- To modify ContentFolderMember, the user must be a member of the library and have permission to modify folders.

Fields

Field Name	Details
ChildRecordId	Type reference Properties Filter, Group, Sort Description ID of the file. This is a relationship field. Relationship Name ChildRecord Relationship Type Lookup Refers To ContentDocument
ParentContentFolderId	Type reference Properties Filter, Group, Sort, Update

Field Name	Details
	Description ID of the folder the file is in. This is a relationship field.
	Relationship Name ParentContentFolder
	Relationship Type Lookup
	Refers To ContentFolder

ContentHubItem

Represents a file or folder in a Files Connect external data source, such as Microsoft SharePoint or OneDrive for Business. This object is available in API version 33.0 and later.

Special Access Rules

Chatter and Files Connect must be enabled for the organization.

Supported Calls

`describeSObjects()`, `query()`, `search()`

Fields

Field Name	Details
ContentHubRepositoryId	Type reference Properties Filter, Group, Nillable Description The ID for the related external data source described by the ContentHubRepository object.
ContentSize	Type long Properties Group, Nillable

Field Name	Details
	Description The size of the file or folder. Available in API version 65.0 and later.
ContentModifiedDate	Type dateTime Properties Nillable Description Date the file or folder content last changed.
ContentSize	Type int Properties Group, Nillable Description The size of the file or folder that's less than 2 GB.
Description	Type string Properties Filter, Group, Nillable Description Explanation of item in external data source.
ExternalContentUrl	Type url Properties Group, Nillable Description The URL of the document content in the external data source.
ExternalDocumentUrl	Type url Properties Group, Nillable Description The URL of the detail page in the external data source.
ExternalId	Type string Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description ID for the file or folder in the external data source.
FileExtension	Type string Properties Group, Nillable Description File format extension, such as .doc or .pdf
FileType	Type string Properties Group, Nillable Description Complete file type, such as "Microsoft Word Document."
IsFolder	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether item is a folder or file.
MimeType	Type string Properties Filter, Group, Nillable Description MIME type of the content.
Name	Type string Properties Filter, Nillable, Sort Description Name of the file or folder in the external data source.
Owner	Type string Properties Filter, Group, Nillable

Field Name	Details
	Description Username of the content owner in the external data source.
ParentId	Type string Properties Filter, Group, Nillable Description The ID of the parent folder for the record. This field isn't returned in queries or searches of the ContentHubItem object. It supports only WHERE clauses, such as the following: <code>WHERE ContentHubRepositoryId = <ID of external source> and ParentId = <ID of parent folder or record>.</code> Or specify <code>WHERE ParentId = <name of root folder></code> to return the children of the root folder.  Tip: The ParentId field supports both Salesforce IDs (in the format "0CHxxx") and external IDs.
Title	Type string Properties Group, Nillable Description The title that appears in the content, which often differs from the Name of the containing file or folder.
UpdatedBy	Type string Properties Group, Nillable Description Username for the person who last updated the file.

Usage

The following SOQL query examples show how to retrieve files and folders from a Files Connect external data source. These examples use placeholders for ID values for the repository ID and folder IDs. Before running these queries, replace the placeholders with valid ID values for your external data source and folders.

Important: You must filter queries and searches on ContentHubItem with the ContentHubRepositoryId field; for example, `SELECT Id FROM ContentHubItem WHERE ContentHubRepositoryId = <ID of external data source>`.

Example 1: Get the ID and name of the root folder in an external file source.

```
SELECT Id, Name
FROM ContentHubItem
WHERE ContentHubRepositoryId = '<repository ID>' AND ParentId = NULL
```

Example 2: List all folders and files under the specified root folder.

```
SELECT Id, Name
FROM ContentHubItem
WHERE ContentHubRepositoryId = '<repository ID>' AND ParentId = '<root folder ID>'
```

Example 3: List all external file data sources by querying ContentHubRepository.

```
SELECT DeveloperName
FROM ContentHubRepository
```

Example 4: List all files and folders in a given folder and external file source.

```
SELECT Id, Name
FROM ContentHubItem
WHERE ContentHubRepositoryId = '<repository ID>' AND ParentId = '<parent folder ID>'
```

Example 5: To return only folders in the result set, add `IsFolder = true` in the `WHERE` clause to a query that returns files and folders. For example, the following query lists all folders under the root folder.

```
SELECT Id, Name
FROM ContentHubItem
WHERE ContentHubRepositoryId = '<repository ID>' AND ParentId = '<root folder ID>'
      AND IsFolder = true
```

Example 6: Retrieve a link that is used to open the specified document in an external source.

```
SELECT ExternalDocumentUrl
FROM ContentHubItem
WHERE ContentHubRepositoryId = '<repository ID>' AND Id = '<document ID>'
```

SOSL Example: Retrieve the ID and name of all documents that contain the search string. The result set is limited to the first 10 documents.

```
FIND {<search string>}
RETURNING ContentHubItem(Id, Name
                        WHERE ContentHubRepositoryId = '<repository ID>')
LIMIT 10
```

ContentHubRepository

Represents a Files Connect external data source such as Microsoft SharePoint or OneDrive for Business. This object is available in API version 33.0 and later.

Special Access Rules

Chatter and Files Connect must be enabled for the organization.

Supported Calls

`describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
DeveloperName	Type string Properties Filter, Group, Sort Description The unique name of the record in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. This field is automatically generated but you can supply your own value if you create the record using the API.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance may slow while Salesforce generates one for each record.
MasterLabel	Type string Properties Filter, Group, Nillable, Sort Description Master label for the external data source. This display value is the internal label and does not get translated.
Type	Type string Properties Filter, Group, Nillable, Sort Description The data source type. Possible values are: • <code>contenthubGoogleDrive</code> • <code>contenthubOffice365</code> • <code>contenthubOneDrive</code> • <code>contenthubSharepoint</code>

Field Name	Details
	• <code>contenthubBox</code> • <code>contenthubQuip</code>

ContentNote

Represents a note created with the enhanced note-taking tool, released in Winter '16. This object is available in API version 32.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `search()`, `update()`

Special Access Rules

- Notes must be enabled.

Fields

Field	Details
<code>Content</code>	Type base64 Properties Create, Nillable, Update Description The content or body of the note, which can include properly formatted HTML or plain text. When a document is uploaded or downloaded via the API, it must be base64 encoded (for upload) or decoded (for download). Any special characters within plain text in the <code>Content</code> field must be escaped. You can escape special characters by calling <code>content.escapeHtml4()</code>. If the input contains unsafe HTML characters or new lines, we automatically strip them out before saving the content.
<code>ContentModifiedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The date the document was modified. <code>ContentModifiedDate</code> updates when, for example, the document is renamed or a new document version is uploaded. This field is available in API version 48.0 and later.

Field	Details
ContentSize	Type int Properties Filter, Group, Nillable, Sort Description The size of the note in bytes for notes smaller than 2 GB. In API version 66.0 and later, use the <code>ContentSizeLong</code> field.
ContentSizeLong	Type long Properties Filter, Group, Nillable, Sort Description The size of the note in bytes, up to 10 GB. This field is available in API version 66.0 and later.
FileExtension	Type string Properties Filter, Group, Nillable, Sort Description File extension of the note.
FileType	Type string Properties Filter, Group, Nillable, Sort Description Type of file for the note. All notes have a file type of <code>SNOTE</code>.
IsReadOnly	Type boolean Properties Defaulted on create, Group, Sort Description Indicates whether the note is read only.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The date the note was last viewed. This field is available in API version 35.0 and later.
LatestContentId	Type reference Properties Filter, Group, Nillable, Sort Description Lookup to the note's ContentBody. This field is available in API version 52.0 and later. This is a relationship field. Relationship Name LatestContent Relationship Type Lookup Refers To ContentBody
LatestPublishedVersionId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the ContentVersion for the latest published version of the note.
OwnerId	Type reference Properties Create (for users assigned the Set Audit Fields Upon Creation permission), Defaulted on create, Filter, Group, Sort, Update (for users assigned the Set Audit Fields Upon Creation permission) Description ID of the owner of the note.
SharingPrivacy	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Controls sharing privacy for a file. Only Salesforce admins and file owners with Collaborator access to the file can modify this field. Default is <code>Visible to Anyone With Record Access</code> . When set to <code>Private on Records</code> , the file is private on records but can be shared selectively with others.

Field	Details
	This field is available in API versions 41.0 and later.
TextPreview	Type string Properties Filter, Group, Nillable, Sort Description A preview of the note's content. This field is available in API version 35.0 and later.
Title	Type string Properties Create, Filter, Group, idLookup, Namefield, Sort, Update Description Title of the note.

Usage

- Use ContentNote to create, query, retrieve, search, edit, and update notes.
- ContentNote is built on ContentVersion, and so it has many of the same usages.
- Not all fields can be set for notes. Only the `Content` and `Title` fields can be updated.
- The maximum file size that you can upload via the SOAP API is 50 MB. When a document is uploaded or downloaded via the API, it's converted to base64. This conversion increases the document size by approximately 37%. Account for the base64 conversion increase so that the file you plan to upload is less than 50 MB after conversion.
- You can convert old Note records to Lightning Experience, so users can view and edit notes from the Notes & Attachments related list in Lightning Experience. Users can edit their converted notes, which are accessible from the Notes related list and Notes tab. Copy old Note records to newly created ContentNote records. Users assigned the Set Audit Fields Upon Creation permission can set the owner, created date, and last modified date on ContentNote records.
- SOQL and SOSL queries on the ContentNote return only the most recent version of the note.
- To relate a note to a record, use [ContentDocumentLink](#). Review the `LinkedEntityID` field in [ContentDocumentLink](#) for a list of objects that notes can relate to.

For example, the following Apex code creates a note and escapes any special characters so they're converted to their HTML equivalents.

 **Note:** Apex code doesn't need to be encoded to base64 before it's uploaded and downloaded.

```
ContentNote cn = new ContentNote();
cn.Title = 'test1';
String body = 'Hello World. Before insert/update, escape special characters such as ", ',
    &, and other standard escape characters.';
cn.Content = Blob.valueOf(body.escapeHTML4());
insert(cn);
```


In this example, the following code creates a note using text that is already formatted as HTML, so it doesn't need to be escaped.

```
ContentNote cn = new ContentNote();
cn.Title = 'test2';
String body = '<b>Hello World. Because this text is already formatted as HTML, it does not
need to be escaped.
Special characters such as &quot;;, etc. must already use their HTML equivalents.</b>';
cn.Content = body;
insert(cn);
```

ContentNotification

Represents a notification for a file. This object is available in API version 42.0 and later.

Supported Calls

delete(), describeSObjects(), query(), retrieve()

Special Access Rules

Only users with Modify All Data permission have access to this object.

Fields

Field	Details
EntityIdentifierId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the object with the notification.
EntityType	Type string Properties Filter, Group, Nillable, Sort Description Type of object with the notification. One of the following. - ContentDocument - ContentTagName - ContentVersion - ContentWorkspace - ContentWorkspacePermission

Field	Details
	User
Nature	Type string Properties Filter, Group, Nillable, Sort Description Type of notification.
Subject	Type textarea Properties Filter, Nillable, Sort Description Subject of the notification.
Text	Type textarea Properties Filter, Nillable, Sort Description Text of the notification.
UsersId	Type reference Properties Filter, Group, Sort Description ID of the user who received the notification. This is a relationship field. Relationship Name Users Relationship Type Lookup Refers To User

ContentTagSubscription

Represents a subscription for a user following a tag on a file. This object is available in API version 42.0 and later.

Supported Calls

`delete()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Only users with Modify All Data permission have access to this object.

Fields

Field	Details
UserId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the user following the tag on the file. This is a relationship field. Relationship Name User Relationship Type Lookup Refers To User

ContentTaxonomy

Represents a content taxonomy, which is used to classify and organize Salesforce CMS content. To create a hierarchy of terms in a content taxonomy, use this object in addition to the `ContentTaxonomyTerm`, `ContentTaxonomyRelatedTerm`, and `ContentTaxonomyTermRelatedTerm` objects. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To view this object, users need the permission View Content Taxonomy enabled. To edit this object, users need View Content Taxonomy and Manage Content Taxonomy enabled.

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the content taxonomy. This description appears in the API and in the Content Taxonomy tab in the Digital Experiences App. The maximum length is 255 characters.
Language	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The combined language and locale ISO code.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the content taxonomy.

SEE ALSO:

- [ContentTaxonomyRelatedTerm](#)
- [ContentTaxonomyTerm](#)
- [ContentTaxonomyTermRelatedTerm](#)
- [ContentTaxonomyTermRelationshipType](#)

ContentTaxonomyRelatedTerm

Represents the relationship between a term and the content taxonomy to which the term belongs. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`

Special Access Rules

To view this object, users need the permission View Content Taxonomy enabled. To edit this object, users need View Content Taxonomy and Manage Content Taxonomy enabled.

Fields

Field	Details
ContentTaxonomyId	Type reference Properties Create, Filter, Group, Sort Description The ID of the content taxonomy to which the term belongs. This field is a relationship field. Relationship Name ContentTaxonomy Relationship Type Lookup Refers To ContentTaxonomy object
ContentTaxonomyTermId	Type reference Properties Create, Filter, Group, Sort Description The ID of the term that belongs to the content taxonomy. This field is a relationship field. Relationship Name ContentTaxonomyTerm Relationship Type Lookup Refers To ContentTaxonomyTerm object

Usage

To include a term in a taxonomy, you must use this object in addition to the ContentTaxonomyTerm and ContentTaxonomy objects.

SEE ALSO:

- [ContentTaxonomy](#)
- [ContentTaxonomyTerm](#)

ContentTaxonomyTerm

Represents a term in a content taxonomy. Terms describe what content is or how it's used, and they're organized in parent-child relationships in the taxonomy hierarchy. This object is available in API version 63.0 and later.

Supported Calls

```
create(), delete(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(),
search(), undelete(), update(), upsert()
```

Special Access Rules

To view this object, users need the permission View Content Taxonomy enabled. To edit this object, users need View Content Taxonomy and Manage Content Taxonomy enabled.

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the content taxonomy term. This description appears in the API and in the Content Taxonomy tab in the Digital Experiences App. The maximum length is 255 characters.
DeveloperName	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The unique name of the content taxonomy term in the API. This field is unique within your organization. The name: • must be 80 characters or fewer • must begin with a letter

Field	Details
	• can contain only underscores and alphanumeric characters • can't include spaces • can't end with an underscore • can't contain 2 consecutive underscores
ExternalId	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The external ID of the content taxonomy term.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the content taxonomy term. The name must be between 2 and 255 characters long.

Usage

To include a term in a taxonomy, you must also use the objects `ContentTaxonomyRelatedTerm` and `ContentTaxonomy`. If you create only a `ContentTaxonomyTerm`, then the term isn't considered part of the taxonomy, and isn't visible. To relate this term to another term in your taxonomy, use the object `ContentTaxonomyTermRelatedTerm`.

SEE ALSO:

[ContentTaxonomy](#)

[ContentTaxonomyRelatedTerm](#)

[ContentTaxonomyTermRelatedTerm](#)

ContentTaxonomyTermRelatedTerm

Represents the relationship between two terms in a content taxonomy. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`

Special Access Rules

To view this object, users need the permission View Content Taxonomy enabled. To edit this object, users need View Content Taxonomy and Manage Content Taxonomy enabled.

Fields

Field	Details
ContentTaxonomyId	Type reference Properties Create, Filter, Group, Sort Description The ID of the content taxonomy to which the term belongs. This field is a relationship field. Relationship Name ContentTaxonomy Relationship Type Lookup Refers To ContentTaxonomy object
ContentTaxonomyTermId	Type reference Properties Create, Filter, Group, Sort Description The ID of the primary term that has a relationship with another term. This field is a relationship field. Relationship Name ContentTaxonomyTerm Relationship Type Lookup Refers To ContentTaxonomyTerm object
ContentTaxonomyTermRelaTypeId	Type reference Properties Create, Filter, Group, Sort Description The ID of the type of relationship between the two taxonomy terms.

Field	Details
	This field is a relationship field. Relationship Name ContentTaxonomyTrmRelaType Relationship Type Lookup Refers To ContentTaxonomyTermRelationshipType object
RelatedContentTaxonomyTermId	Type reference Properties Create, Filter, Group, Sort Description The ID of the term that is related to the primary term. This field is a relationship field. Relationship Name RelatedContentTaxonomyTerm Relationship Type Lookup Refers To ContentTaxonomyTerm object

Usage

To relate a term to another term in a content taxonomy, use this object in addition to the ContentTaxonomyTerm object. This object can't be updated. You can only create and delete it.

SEE ALSO:
[ContentTaxonomyTerm](#)

ContentTaxonomyTermRelationshipType

Represents the type of relationship between two terms in a content taxonomy. This object is available in API version 63.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

To view this object, users need the permission View Content Taxonomy enabled.

Fields

Field	Details
ContentTaxonomyTrmRelaCatg	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Category of the relationship type. Possible values are: HasBroader
Description	Type textarea Properties Filter, Group, Nillable, Sort Description Description of the relationship type.
Name	Type string Properties Filter, Group, idLookup, Sort Description Name of the relationship type.

Usage

ContentTaxonomyRelationshipType can't be created, updated, or deleted. In API version 63.0, the default category for the relationship type is HasBroader.

ContentTransferEventLog

ContentTransferEventLog stores information about content transfer events, such as downloads, uploads, and previews. This information includes events performed on files and attachments to records. This object is available in API version 62.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
DocumentIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the document that's being shared.
FilePreviewType	Type string Properties Filter, Group, Nillable, Sort Description The content type of the file preview.
FileSize	Type double Properties Filter, Nillable, Sort Description The size of rendition being added (bytes).
FileType	Type string Properties Filter, Group, Nillable, Sort Description The content type of the file version.
OperationType	Type string Properties Filter, Group, Nillable, Sort Description The operation that's being performed.

Field	Details
	Possible Values • meta_deploy • meta_list • meta_retrieve • meta_synchronous_create • meta_synchronous_read • meta_synchronous_upsert
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. For example: 3nWgxWbDKWWDIk0FKfF5DV.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 18-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943YAS
VersionIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the content version.

ContentUserSubscription

Represents a subscription for a user following another user. This object is available in API version 42.0 and later.

Supported Calls

`delete()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Only users with Modify All Data permission have access to this object.

Fields

Field	Details
SubscribedToUserId	Type reference Properties Filter, Group, Sort Description ID of the user who is followed by another user. This is a relationship field. Relationship Name SubscribedToUser Relationship Type Lookup Refers To User
SubscriberUserId	Type reference Properties Filter, Group, Sort Description ID of the user who follows another user. This is a relationship field. Relationship Name SubscriberUser Relationship Type Lookup

Field	Details
	Refers To User

ContentVersion

Represents a specific version of a document in Salesforce CRM content or Salesforce Files. This object is available in versions 17.0 and later for Salesforce CRM content documents. This object is available in versions 20.0 and later for Salesforce Files.

The maximum number of versions that can be published in a 24-hour period is 200,000.

 **Note:** Depending on how files are shared, queries on `ContentDocument` and `ContentVersion` without specifying an ID don't return all files a user has access to. For example, if a user only has access to a file because they have access to a record that the file is shared with, the file won't be returned in a query such as "SELECT Id FROM ContentDocument."

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

- All users with a content feature license can create versions in their personal library. Customer and Partner Portal users must also supply the `NetworkId` of the Experience Cloud site in the request.
- By default, users (including users with the "View All Data" permission) can only query files they have access to, including:
 - Salesforce Files in their personal library and in libraries they're a member of, regardless of library permissions (API version 17.0 and later).
 - Salesforce Files they own, shared directly with them, posted on their profile, or posted on groups they can see (API version 21.0 and later).

Enable the Query All Files permission to let your View All Data users bypass the restrictions on querying files.

 - Query All Files returns all files, including files in non-member libraries and files in unlisted groups.
 - Users can't edit, upload new versions, or delete files they don't have access to.
 - View All Data permission is required to enable Query All Files.
- All users can update versions in their personal library.
- The owner of a version or document can update the document if they're a member of the library, regardless of library permissions.
- To update a Salesforce CRM Content document, the user must be a member of the library with one of these library privileges enabled:
 - Add Content
 - Add Content On Behalf of Others
 - Manage Library
- Customer and Partner Portal users must have the View Content in Portal permission to query content in libraries where they have access.
- Customer and Partner Portal users can only publish, version, or edit documents if they have a Salesforce CRM Content feature license.
- `FileType` is defined by either `ContentUrl` for links or `PathOnClient` for documents, but not both.

- In API version 34.0 and later, any file can be shared with libraries, whether the file originated in Chatter or in Salesforce CRM Content.
- In API version 39.0 and later, custom Apex download handlers can be created that can control access to documents. See the [Apex Developer Guide](#) for more information.

Fields

Field	Details
Checksum	Type string Properties Filter, Group, Nillable, Sort Description MD5 checksum for the file.
ContentBodyId	Type reference Properties Create, Filter, Group, Nillable, Sort Description Allows inserting a file version independently of the file blob being uploaded. This field is available for query and insert only. It can only point to a ContentBody record. This field is available in API version 40.0 and later. This is a relationship field. Relationship Name ContentBody Relationship Type Lookup Refers To ContentBody
ContentDocumentId	Type reference Properties Create, Filter, Group, Sort Description ID of the document. This is a relationship field. Relationship Name ContentDocument Relationship Type Lookup

Field	Details
	Refers To ContentDocument
ContentLocation	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort Description Origin of the document. Valid values are: • S—Document is located within Salesforce. Label is Salesforce. • E—Document is located outside of Salesforce. Label is External. • L—Document is located on a social network and accessed via Social Customer Service. Label is Social Customer Service. • SfDrive—For internal use only. • SCS—For internal use only.
ContentModifiedById	Type reference Properties Filter, Group, Nillable, Sort Description ID of the user who modified the document. This is a relationship field. Relationship Name ContentModifiedBy Relationship Type Lookup Refers To User
ContentModifiedDate	Type dateTime Properties Create, Filter, Nillable, Sort Description Date the document was modified. ContentModifiedDate updates when, for example, the document is renamed or a new document version is uploaded. When uploading the first version of a document, ContentModifiedDate can be set to the current time or any time in the past.

Field	Details
ContentSize	Type int Properties Filter, Group, Nillable, Sort Description The size of the document in bytes for documents smaller than 2 GB. The value is zero for links. In API version 66.0 and later, we recommend that you use the <code>ContentSizeLong</code> field even for documents smaller than 2 GB.
ContentSizeLong	Type long Properties Filter, Group, Nillable, Sort Description The size of the document in bytes up to 10 GB. The value is zero for links. This field is available in API version 66.0 and later.
ContentUrl	Type url Properties Create, Filter, Nillable, Sort, Update Description URL for links. This is only set for links. One of the fields that determines the <code>FileType</code>. The character limit in API versions 33.0 and later is 1,300. The character limit in API versions 32.0 and earlier was 255.
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Description of the content version.
Division	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description A logical segment of your organization's data. For example, if your company is organized into different business units, you could create a division for each business unit, such as "North

Field	Details
	America," "Healthcare," or "Consulting." Available only if the org has the Division permission enabled.
ExternalDataSourceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the external document referenced in the ExternalDataSource object. This is a relationship field. Relationship Name ExternalDataSource Relationship Type Lookup Refers To ExternalDataSource
ExternalDocumentInfo1	Type string Properties Create, Filter, Nillable, Sort, Update Description Stores the URL of the file in the external content repository. The integration from the external source determines the content for this string. After the reference or copy is created, the URL of the external file is updated when you: • Republish a file reference in Lightning Experience • Open the document • Create a file reference in the Connect REST API with <code>reuseReference</code> set to true. When the file is updated, the shared link is updated to the most current version.
ExternalDocumentInfo2	Type string Properties Create, Filter, Nillable, Sort, Update Description Contains the external file ID. Salesforce determines the content for this string, which is private. The content can change without notice, depending on the external system. After the file reference is created, this field isn't updated, even if the file path changes.
FeaturedContentBoost	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description Read only. Designates a document as featured.
FeaturedContentDate	Type date Properties Filter, Group, Nillable, Sort Description Date the document was featured.
FileExtension	Type string Properties Filter, Group, Nillable, Sort Description File extension of the document. This field is available in API version 31.0 and later.
FileType	Type string Properties Filter, Group, Sort Description Type of content determined by <code>ContentUrl</code> for links or <code>PathOnClient</code> for documents.
FirstPublishLocationId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the location where the version was first published. If the version is first published into a user's personal library or My Files, the field will contain the ID of the user who owns the personal library or My Files. In Lightning Experience, if the first version is published into a public library, the field will contain the ID of that library. Accepts all record IDs supported by <code>ContentDocumentLink</code> (anything a file can be attached to, like records and groups). Setting <code>FirstPublishLocationId</code> allows you to create a file and share it with an initial record/group in a single transaction, and have the option to create more links to share

Field

Details

the file with other records or groups later. When a file is created, it's automatically linked to the record, and PublishStatus will change to Public from Pending/Personal.

This field is only set the first time a version is published via the API.

FirstPublishLocationId can't be set to another ID when a new content version is inserted.



Note: Salesforce updates the FirstPublishLocationId updates automatically when a new OwnerId is added to the ContentVersion. For example, when you publish a new version with a different OwnerId than the current OwnerId, the FirstPublishLocationId of all previous versions updates to the previous OwnerId. The new published version sets the FirstPublishLocationId to the new OwnerId.

This is a polymorphic relationship field.

Relationship Name

FirstPublishLocation

Relationship Type

Lookup

Refers To

Account, Accreditation, ActivationTarget, ActivationTrgtIntOrgAccess, ApiAnomalyEventStore, AssessmentIndicatorDefinition, AssessmentTask, AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskIndDefinition, AssessmentTaskOrder, Asset, AssetRelationship, AssignedResource, Award, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, Campaign, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis, CareInterventionType, CareMetricTarget, CareObservation, CareObservationComponent, CarePgmProvHealthcareProvider, CarePreauth, CarePreauthItem, CareProgram, CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee, CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider, CareProgramTeamMember, CareProviderAdverseAction, CareProviderFacilitySpecialty, CareProviderSearchableField, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareSpecialtyTaxonomy, CareTaxonomy, Case, CodeSet, CollaborationGroup, CommSubscription, CommSubscriptionChannelType, CommSubscriptionConsent, CommSubscriptionTiming, ConsumptionSchedule, Contact, ContactEncounter, ContactEncounterParticipant, ContentWorkspace, Contract, ConversationEntry, CoverageBenefit, CoverageBenefitItem, CredentialStuffingEventStore, CreditMemo, CreditMemoLine, Dashboard, DashboardComponent, DataStream, DelegatedAccount, DocumentChecklistItem, EmailMessage, EmailTemplate, EngagementChannelType, EnhancedLetterhead, EnrollmentEligibilityCriteria, Event, HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, Identifier, Image, IndividualApplication, Invoice, InvoiceLine, Lead, ListEmail, Location, MarketSegment, MarketSegmentActivation, MemberPlan, MessagingSession, MktCalculatedInsight, OperatingHours, Opportunity, Order, OrderItem, Organization, OtherComponentTask, OutgoingEmail, PartyConsent, PersonEducation, PersonLanguage, PersonLifeEvent,

Field	Details
	PersonName, PlanBenefit, PlanBenefitItem, Product2, ProductFulfillmentLocation, ProductItem, ProductItemTransaction, ProductRequest, ProductRequestLineItem, ProductRequired, ProductTransfer, ProfileSkill, ProfileSkillEndorsement, ProfileSkillUser, ProviderSearchSyncLog, PurchaserPlan, PurchaserPlanAssn, ReceivedDocument, Report, ReportAnomalyEventStore, ResourceAbsence, ResourcePreference, ReturnOrder, ReturnOrderLineItem, ServiceAppointment, ServiceResource, ServiceResourceSkill, ServiceTerritory, ServiceTerritoryMember, ServiceTerritoryWorkType, SessionHijackingEventStore, Shift, Shipment, ShipmentItem, Site, SkillRequirement, SocialPost, Solution, Task, ThreatDetectionFeedback, Topic, User, Visit, VisitedParty, Visitor, VoiceCall, VolunteerProject, WorkBadgeDefinition, WorkOrder, WorkOrderLineItem, WorkType, WorkTypeGroup, WorkTypeGroupMember
IsAssetEnabled	Type boolean Properties Create, Group, Defaulted on create Description Can be specified on insert of ContentVersion to automatically convert a ContentDocument file into a ContentAsset. This field can be SOQL queried, but it can't be edited. This field is available in API version 38.0 and later.
IsLatest	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this is the latest version of the document (<code>true</code>) or not (<code>false</code>).
IsMajorVersion	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description <code>true</code> if the document is a major version; <code>false</code> if the document is a minor version. Major versions can't be replaced.
Language	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language for this document. This field defaults to the org's default language unless the multi language setting is enabled.

Field	Details
	Specifies the language of the labels returned. The value must be a valid user locale (language and country), such as <code>de_DE</code> or <code>en_GB</code>. For more information on locales, see the Language field on the <code>CategoryNodeLocalization</code> object.
MalwareScanDate (Beta)	Type dateTime Properties Filter, Group, Nillable, Sort Description The date the document was scanned for malware. This field is available as a beta feature in API version 66.0 and later.  Note: The <code>MalwareScanDate</code> field is a pilot or beta service that is subject to the Beta Services Terms at Agreements - Salesforce.com or a written Unified Pilot Agreement if executed by Customer, and applicable terms in the Product Terms Directory. Use of this pilot or beta service is at the Customer's sole discretion.
MalwareScanStatus (Beta)	Type picklist Properties Filter, Group, Sort Description Indicates whether the document was scanned for malware and whether it's safe or malicious. This field is available in API version 66.0 and later. Valid values are: • <code>NotScanned</code>—The file hasn't yet been scanned for malware. This is the default value. • <code>Scheduled</code>—The file scan is in progress. • <code>Clean</code>—The file was scanned and doesn't contain malware. • <code>Malicious</code>—The file was scanned and it contains malware. • <code>Skipped</code>—The file can't be scanned because it's either larger than 100 MB or it's a Salesforce-generated file, such as a Content Note. • <code>Failed</code>—The file wasn't scanned because of an error.  Note: The <code>MalwareScanStatus</code> field is a pilot or beta service that is subject to the Beta Services Terms at Agreements - Salesforce.com or a written Unified Pilot Agreement if executed by Customer, and applicable terms in the Product Terms Directory. Use of this pilot or beta service is at the Customer's sole discretion.
NegativeRatingCount	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description Read only. The number of times different users have given the document a thumbs down. Rating counts for the latest version are not version-specific. If Version 1 receives 10 thumbs-down votes, and Version 2 receives 2 thumbs-down votes, the <code>NegativeRatingCount</code> on Version 2 is 12. However, rating counts are not retroactive for prior versions. The <code>NegativeRatingCount</code> on Version 1 is 10.
NetworkId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the Experience Cloud site that this file originated from. This field is available in API version 26.0 and later, if digital experiences is enabled for your org. You can add a <code>NetworkId</code> only when creating a file. You can't change or add a <code>NetworkId</code> for an existing file.
Origin	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort Description The source of the content version. Valid values are: • C—Content document from the user's personal library. Label is Content. The <code>FirstPublishLocationId</code> must be the user's ID. If <code>FirstPublishLocationId</code> is left blank, it defaults to the user's ID. • H—Salesforce file from the user's My Files. Label is Chatter. The <code>FirstPublishLocationId</code> must be the user's ID. If <code>FirstPublishLocationId</code> is left blank, it defaults to the user's ID. Origin can only be set to H if Chatter is enabled for your organization. This field defaults to C. Label is Content Origin.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of this document. This is a relationship field. Relationship Name Owner

Field	Details
	Relationship Type Lookup Refers To User
PathOnClient	Type string Properties Create, Filter, Nillable, Sort Description The complete path of the document. One of the fields that determines the <code>FileType</code>.  Note: Specify a complete path including the file extension in order for the document to be visible in the Preview tab.
PositiveRatingCount	Type int Properties Filter, Group, Nillable, Sort Description Read only. The number of times different users have given the document a thumbs up. Rating counts for the latest version are not version-specific. If Version 1 receives 10 thumbs-up votes, and Version 2 receives 2 thumbs-up votes, the <code>PositiveRatingCount</code> on Version 2 is 12. However, rating counts are not retroactive for prior versions. The <code>PositiveRatingCount</code> on Version 1 is 10.
PublishStatus	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Indicates if and how the document is published. Valid values are: • <code>P</code>—The document is published to a public library and is visible to other users. Label is Public. • <code>R</code>—The document is published to a personal library and is not visible to other users. Label is Personal Library. • <code>U</code>—The document is not published because publishing was interrupted. Label is Upload Interrupted.
RatingCount	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description Read only. Total number of positive and negative ratings.
ReasonForChange	Type string Properties Create, Filter, Nillable, Sort, Update Description The reason why the document was changed. This field can only be set when inserting a new version (revising) a document.
RecordTypeId	Type reference Properties Create, Filter, Nillable, Update Description ID of the record type of the version. Custom fields are restricted in <code>RecordTypeId</code>. When an administrator creates a custom field via the API it must be added to at least one page layout: • If the custom field is added to the page layout associated with the General record type, the <code>RecordTypeId</code> that corresponds to that record type does not have to be set on the version record. • If the custom field is added to the page layout associated with a custom record type, the <code>RecordTypeId</code> that corresponds to that record type must be set on the version record.
SharingOption	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Controls whether sharing is frozen for a file. Only administrators and file owners with Collaborator access to the file can modify this field. Default is <code>Allowed</code>, which means that new shares are allowed. When set to <code>Restricted</code>, new shares are prevented without affecting existing shares. This field is available in API versions 35.0 and later.
SharingPrivacy	Type picklist

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Controls sharing privacy for a file. Only administrators and file owners with Collaborator access to the file can modify this field. Default is <code>Visible to Anyone With Record Access</code>. When set to <code>Private on Records</code>, the file is private on records but can be shared selectively with others. This field is available in API versions 41.0 and later.
TagCsv	Type textarea Properties Create, Nillable, Sort, Update Description Text used to apply tags to a content version via the API.
TextPreview	Type string Properties Nillable, Filter, Group, Sort Description A preview of a document. Available in API version 35.0 and later.
Title	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The title of a document.
VersionData	Type base64 Properties Create, Nillable, Update Description The content or body of the note, which can include properly formatted HTML or plain text. When a document is uploaded or downloaded via the API, it should be base64 encoded (for upload) or decoded (for download). Any special characters within plain text in the <code>Content</code> field must be escaped. You can escape special characters by calling <code>content.escapeHtml4()</code>. This field can't be set for links.

Field	Details
	The maximum file size you can upload via the SOAP API is 50 MB. When a document is uploaded or downloaded via the API, it is converted to base64 and stored in <code>VersionData</code>. This conversion increases the document size by approximately 37%. Account for the base64 conversion increase so that the file you plan to upload is less than 50 MB after conversion. If a custom Apex download handler is active, this field is accessed from the API, and the download is not allowed, Salesforce will return a <code>CONTENT_CUSTOMIZED_DOWNLOAD_EXCEPTION</code> error.
VersionDataUrl	Type string Properties Filter, Group, Nillable, Sort Description The URL used to fetch a file from the binary data endpoint. This field is only populated on direct queries to ContentVersion, and not when queried through a related entity's foreign key to ContentVersion. If available, access preview images of a file by appending a <code>thumb</code> query parameter to this URL. For example: <pre>myContentVersion.VersionDataUrl + '?thumb=THUMB240BY180'</pre> Available <code>thumb</code> parameter values are: • <code>THUMB720BY480</code> — corresponds to the <code>big-thumbnail</code> preview format • <code>THUMB240BY180</code> — corresponds to the <code>thumbnail</code> preview format • <code>THUMB120BY90</code> — corresponds to the <code>tiny-thumbnail</code> preview format See File Preview in the <i>Connect REST API Developer Guide</i> for additional details about file previews. This field can't be set for links. This field is available in API versions 55.0 and later.
VersionNumber	Type string Properties Filter, Group, Nillable, Sort Description The version number. The number increments with each version of the document, for example, 1, 2, 3.

Usage

- Use this object to create, query, retrieve, search, edit, and update a specific version of a Salesforce CRM Content document or Salesforce file. Use the ContentDocument object to retrieve, query, update, and delete the latest version of a document, but not a content pack, in a library or a Salesforce file.
- Use this object to create, query, retrieve, search, edit, and update a specific version of a Salesforce file. Use the ContentDocument object to retrieve, query, update, and delete the latest version of a Salesforce file.
- To query a file that is shared only with a record, you must specify the content ID of the file.
- Not all fields can be set for Salesforce Files.
- You can only update a version if it is the latest version and if it is published.
- You can't archive versions.
- Using API version 32.0 and later, you can update record types on versions.
- You can't delete a version via the API.
- The maximum file size you can upload via the SOAP API is 50 MB. When a document is uploaded or downloaded via the API, it is converted to base64 and stored in `VersionData`. This conversion increases the document size by approximately 37%. Account for the base64 conversion increase so that the file you plan to upload is less than 50 MB after conversion.
- To download a document via the API, you must export the `VersionData` of the document. This does not increase the download count.
- When you upload a document from your local drive using the Data Loader, you must specify the actual path in both `VersionData` and `PathOnClient`. `VersionData` identifies the location and extracts the format and `PathOnClient` identifies the type of document being uploaded.
- SOQL queries on the ContentVersion object return all versions of the document. SOSL searches on the ContentVersion object return only the most recent version of the document.
- To query a file that is accessible only through a record share, you must specify the content ID of the file. When SOQL querying the ContentVersion object, either the `ContentVersionId` or the `ContentDocumentId` must be compounded by an AND operator.

For example,

```
SELECT FileExtension, Title FROM ContentVersion
WHERE (ContentDocumentId = '<ContentDocumentId>' or Id='<ContentVersionId>') and
IsLatest=true
```

```
SELECT Id, VersionData, FileExtension, Title FROM ContentVersion
WHERE ContentDocumentId='<ContentDocumentId>' AND FirstPublishLocationId =
'<FirstPublishLocationId>'
```

- If you query versions in the API, versions with a `PublishStatus` of `Upload Interrupted` are not returned.
- Documents published into a personal library assume the default record type that is set for the user profile of the person publishing the document (General, if no default is set for the user profile).



Note: An administrator can rename the default (*Content Version Layout*) page layout.

- Contact Manager, Group, Professional, Enterprise, Unlimited, and Performance Edition customers can publish a maximum of 200,000 new versions per 24-hour period. Developer Edition and trial users can publish a maximum of 2,500 new versions per 24-hour period.
- Custom validation rules can prevent an update of documents published into a personal library via the API.

Applying Tags to ContentVersion Records

Tags can be applied to ContentVersion records using either Enterprise or Partner API.

To apply tags to a ContentVersion record, set a value in the `TagCsv` field. For example, setting this field to `one,two,three` creates and associates three tags to that version.

- The maximum length of the `TagCsv` field is 2,000 characters.
- The maximum length of an individual tag is 100 characters.
- When tags are applied to a version, the content is indexed automatically and the tags are searchable.
- You can't apply tags to a `TagCsv` that is published into a personal library. You can apply tags to a `TagCsv` that's in a shared library or folder.
- You can't apply tags using the ContentDocument object.
- You can't change or delete tag names. You can remove tags from a document, but that doesn't delete the tag.
- Tags are case insensitive. You can't have two tags with the same name even if they use different uppercase and lowercase letters. The case of the original tag is always used.

To delete tags from a ContentVersion record, perform a standard API update, and remove any values from the `TagCsv` field that you want to delete. For example, if the original `TagCsv` is `one,two,three`, perform an API update specifying `one,three` in the `TagCsv` field to delete `two`. To delete all tags from a ContentVersion you perform a standard API update by setting the field to `null`.

If you create a ContentVersion record and want to revise it via the API, you insert another ContentVersion record but associate it to the same ContentDocument record as the original. This has an impact on tagging:

- If you insert the revision and do not set any value in the `TagCsv` field, any tags applied to the previous version are automatically applied to the new version.
- If you insert the revision and specify a new `TagCsv` field, no tags transfer over and the tags you specify are applied instead.

When you perform a SOQL query for a ContentVersion record and select the `TagCsv` field, all the tags associated with that record are returned. The tags in the string are always ordered alphabetically even if they were inserted in a different order. You can't use the `TagCsv` field as part of a filter in a SOQL query. You can't query all tags in your organization.

Library tagging rules:

- API tagging respects the tagging restrictions that exist on any library that the document is published into. For example, if the library is in restricted tagging mode and only allows tags `one,three`, you can't save a version with a `TagCsv` of `one,two,three`.
- If the library is in guided tagging mode, you can apply tags to the ContentVersion. You can't query the value of guided tags on a library, but you can query the tagging model of a library.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[ContentVersionChangeEvent](#) on page 68 (API version 55.0)

Change events are available for the object.

[ContentVersionHistory](#)

History is available for tracked fields of the object.

SEE ALSO:

[ContentDocument](#)

[ContentVersionHistory](#)

ContentVersionComment

Represents a comment on a version of a file. This object is available in API version 42.0 and later.

Supported Calls

`delete()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Only users with Modify All Data permission have access to this object.

Fields

Field	Details
ContentDocumentId	Type reference Properties Filter, Group, Sort Description ID of the file. This is a relationship field. Relationship Name ContentDocument Relationship Type Lookup Refers To ContentDocument
ContentVersionId	Type reference Properties Filter, Group, Sort Description ID of the version of the file. This is a relationship field. Relationship Name ContentVersion Relationship Type Lookup

Field	Details
	Refers To ContentVersion
UserComment	Type textarea Properties Filter, Nillable, Sort Description ID of the user who commented on the file.

ContentVersionHistory

Represents the history of a specific version of a document. This object is available in version 17.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Special Access Rules

- Customer and Partner Portal users must have the “View Content in Portal” permission to query content in libraries where they have access.
- A user can query all versions of a document from their personal library and any version that is part of or shared with a library where they are a member, regardless of library permissions.

 **Note:** To record an event in `contentVersionViewed`, make sure:

- All files are published to a Content Library.
- The details page is viewed in Salesforce Classic.

Fields

Field	Details
ContentVersionId	Type reference Properties Filter, Group, Sort Description ID of the version.

Field	Details
	This is a relationship field. Relationship Name ContentVersion Relationship Type Lookup Refers To ContentVersion
DataType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Data type of the field that was changed.
Division	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description A logical segment of your organization's data. For example, if your company is organized into different business units, you could create a division for each business unit, such as "North America," "Healthcare," or "Consulting." Available only if the organization has the Division permission enabled.
Field	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The name of the field that was changed. Possible values include: • <code>contentVersionCreated</code>—A new version is created. • <code>contentVersionUpdated</code>—The title, description, or any custom field on the version is changed. • <code>contentVersionDownloaded</code>—A version is downloaded. • <code>contentVersionViewed</code>—The version details are viewed. • <code>contentVersionRated</code>—The version is rated. • <code>contentVersionCommented</code>—The version receives a comment. • <code>contentVersionDataReplaced</code>—The new version replaces the previous version, which can happen only when the new version is uploaded immediately after the previous version.

Field	Details
newValue	Type anyType Properties Nillable, Sort Description The new value of the field that was changed.
oldValue	Type anyType Properties Nillable, Sort Description The latest value of the field before it was changed.

Usage

Use this read-only object to query the history of a document version.

SEE ALSO:

[ContentVersion](#)

ContentVersionRating

Represents a rating on a version of a file. This object is available in API version 42.0 and later.

Supported Calls

`delete()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Only users with Modify All Data permission have access to this object.

Fields

Field	Details
ContentVersionId	Type reference

Field	Details
	Properties Filter, Group, Sort Description ID of the version of the file. This is a relationship field. Relationship Name ContentVersion Relationship Type Lookup Refers To ContentVersion
Rating	Type int Properties Filter, Group, Nillable, Sort Description Rating of the file.
UserComment	Type textarea Properties Filter, Nillable, Sort Description Comment made by the user who rated the file.
UserId	Type reference Properties Filter, Group, Sort Description ID of the user who rated the file. This is a relationship field. Relationship Name User Relationship Type Lookup Refers To User

ContentWorkspace

Represents a content library. This object is available in versions 17.0 and later.

 **Note:** This object doesn't apply to personal libraries.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

 **Note:** `create()`, `update()` and `delete()` on `ContentWorkspace` are supported in API version 40.0 and later only.

Special Access Rules

- The Access Libraries user permission allows orgs to make libraries available to users without requiring that they have the legacy Salesforce CRM Content license. This permission is available for profiles and permission sets on most standard user licenses, and isn't available for High Volume Customer Portal, Customer Community, or Chatter Free licenses. Available in API versions 40.0 and later.
- Users with the Create Libraries user perm or the Manage Salesforce CRM Content administrator permission can create libraries (ContentWorkspaces) from the Libraries tab in Salesforce Classic and from the API.
- Customer and Partner Portal users can only edit the library document object if they have a Salesforce CRM Content feature license.
- Customer and Partner Portal users can query this object if they have the "View Content in Portal" permission. A user can query all public libraries where they're members, regardless of library permissions.
- Automated process users can't publish documents to libraries (ContentWorkspaces).

Fields

Field	Details
<code>DefaultRecordTypeId</code>	Type reference Properties Filter, Group, Nillable, Sort Description ID of the default content type for the library. Content types are the containers for custom fields in Salesforce CRM Content.
<code>Description</code>	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Text description of the content library.

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The unique name of the library in the API. Allows a link to the library to be packaged when an asset file is added to a package. Although libraries aren't a packageable entity, references to libraries with a developer name will be included in the package when asset files are packaged. These links can then be restored in the target org. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. Label is Unique Name. This field is available in API version 39.0 and later.
IsRestrictContentTypes	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Read only. Indicates whether content types have been restricted (<code>true</code>) or not (<code>false</code>).
IsRestrictLinkedContentTypes	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Read only. Indicates whether linked content types have been restricted (<code>true</code>) or not (<code>false</code>).
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the library.
NamespacePrefix	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The unique name of the library in the API. Allows a link to the library to be packaged when an asset file is added to a package. Limit: 15 characters. This field is available in API version 39.0 and later.
RootContentFolderId	Type reference Properties Filter, Group, Nillable, Sort Description ID of root folder of the library. This field is available in API version 39.0 and later.
ShouldAddCreatorMembership	Type boolean Properties Create, Defaulted on create, Group Description Automatically create a library membership for the user creating the library. Note this field isn't meant for query and always returns false in query. This field is available in API version 40.0 and later.
TagModel	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The type of tagging assigned to a library. Valid values are: • U — Unrestricted. No restrictions on tagging. Users can enter any tag when publishing or editing content. • G — Guided. Users can enter any tag when publishing or editing content, but they're also offered a list of suggested tags. • R — Restricted. Users must choose from a list of suggested tags.
WorkspaceImageId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description ID of a library image. Image files can be assigned to libraries for branding and easy identification. Library image is visible to all users, even if they aren't library members. This field is available in API version 43.0 and later. Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of a library image. Image files can be assigned to libraries for branding and easy identification. Library image is visible to all users, even if they are not library members. This field is available in API version 43.0 and later. This is a relationship field. Relationship Name WorkspaceImage Relationship Type Lookup Refers To ContentAsset
WorkspaceType	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Differentiates between different types of libraries. Valid values are: • R — Regular library • B — Org asset library This field is available in API version 39.0 and later.

Usage

Use this object to query libraries to find out where documents can be published.

If the content type isn't specified when publishing a new version into a library, it is determined by the `DefaultRecordTypeId` of the primary library.

As of 40.0, you can create, update, or delete a library via the API.

SEE ALSO:

[ContentWorkspaceDoc](#)

ContentWorkspaceDoc

Represents a link between a document and a public library in Salesforce CRM Content. This object is available in versions 17.0 and later.



Note: This object does not apply to documents and versions in a personal library.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

- Customer and Partner Portal users must have the “View Content in Portal” permission in order to query and obtain content in libraries where they have access.
- Customer and Partner Portal users can only edit documents if they have a Salesforce CRM Content feature license.
- To create a ContentWorkspaceDoc, you must be a member of the library with one of these library privileges enabled:
 - “Add Content”
 - “Add Content On Behalf of Others”
 - “Manage Library”
- To query all library documents in a library, a user must be a member of that library, regardless of library permissions.

Fields

Field	Details
ContentDocumentId	Type reference Properties Create, Filter, Group, Sort Description Read only. ID of the library document. This is a relationship field. Relationship Name ContentDocument Relationship Type Lookup Refers To ContentDocument
ContentWorkspaceId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort Description Read only. ID of the library. This is a relationship field. Relationship Name ContentWorkspace Relationship Type Lookup Refers To ContentWorkspace
IsOwner	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Read only. Indicates whether the library owns the document and determines permissions for that document (<code>true</code>) or not (<code>false</code>). Documents can belong to more than one library, but only one library owns the document and determines its permissions.

Usage

- Use this object to link a document to one or more libraries.
- To share a document with additional libraries, create additional ContentWorkspaceDoc records which join the document to the additional libraries.
- Inserting a ContentWorkspaceDoc triggers the publish process for public libraries.
- A document can be published into many public libraries, but it will always be owned by one library which controls the security of the document.
- A document can only be published into the document owner's personal library. You can't publish into another user's personal library. Personal libraries are not visible via the API.
- To publish a document into a personal library, you must specify your user ID as the first publish location ID. If you leave the first publish location ID blank, it defaults to the current user's ID.
- A document can be published from a personal library into a public library, but once it has been published into the public library, it can't be published into the personal library again.
- You can't publish a document from a personal library into a public library that has restricted content types.
- You can't update or delete a library document via the API.

SEE ALSO:

[ContentWorkspace](#)

ContentWorkspaceMember

Represents a member of a content library. This object is available in API version 40.0 and later.

Manage library membership from the API.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

A user can create/update/delete memberships if they have the Manage Salesforce CRM Content admin perm or the Manage Library permission for the library concerned.

Fields

Field	Details
ContentWorkspaceId	Type reference Properties Create, Filter, Group, Sort Description ID of the library. This is a relationship field. Relationship Name ContentWorkspace Relationship Type Lookup Refers To ContentWorkspace
ContentWorkspacePermissionId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The id of the library permission or role. This is a relationship field. Relationship Name ContentWorkspacePermission

Field	Details
	Relationship Type Lookup Refers To ContentWorkspacePermission
MemberId	Type reference Properties Create, Filter, Group, Namepointing, Sort Description ID of the library member (the member is either a user or a group). This is a polymorphic relationship field. Relationship Name Member Relationship Type Lookup Refers To Group, User
MemberType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of library member. Valid values are: • G - Group • U - User

Usage

Use this object to create, update, or delete members from a library.

ContentWorkspacePermission

Represents a library permission. This object is available in API version 40.0 and later.

A library permission is a group of privileges assigned to each content library member. It determines which tasks a member can perform in a particular library. The same user can have a different library permission in each of his or her libraries.



Note: Library permissions do not apply to personal libraries. All library users can save files in their personal libraries.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

The ability to create permissions requires either the Manage Salesforce CRM Content admin perm or the Manage Content Permissions user perm.

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description
Name	Type string Properties Create, Filter, Group, idLookup, Namefield, Sort, Update Description Name of the library.
PermissionsAddComment	Type boolean Properties Create, Filter, Update Description Permission for user to post comments to any content in the library and view all comments in the library. Users can edit or delete their own comments.
PermissionsAddContent	Type boolean Properties Create, Filter, Update Description Permission for user to publish new content to the library, upload new content versions, or restore archived (deleted) content. Content authors can also change any tags associated with their content and archive or delete their own content.

Field	Details
PermissionsAddContentOBO	Type boolean Properties Create, Filter, Update Description Permission for user to choose an author when publishing content in the library.
PermissionsArchiveContent	Type boolean Properties Create, Filter, Update Description Permission for user to archive and restore any content in the library.
PermissionsChatterSharing	Type boolean Properties Create, Filter, Update Description Permission for user to make content from this library accessible outside of the library, sharing with a record or in Chatter. From a record or from Chatter, select a file from the library and attach it to a record or a post.
PermissionsDeleteContent	Type boolean Properties Create, Filter, Update Description Permission for user to delete any content in the library. Authors can undelete their own content from the Recycle Bin.
PermissionsDeliverContent	Type boolean Properties Create, Filter, Update Description Permission for user to share content outside the org via a content delivery or public link.
PermissionsFeatureContent	Type boolean Properties Create, Filter, Update

Field	Details
	Description Permission for user to identify any content in the library as “featured.”
PermissionsManageWorkspace	Type boolean Properties Create, Filter, Update Description Permission for user to perform any action in the library. This privilege is required to edit a library’s name and description, add or remove library members, or delete a library. Manage Library is a super permission which provides all other permission options listed except Deliver Content. Creating a library requires the Manage Salesforce CRM Content app permission or Create Libraries system permission.
PermissionsModifyComments	Type boolean Properties Create, Filter, Update Description Permission for user to edit or delete comments made to any content in the library.
PermissionsOrganizeFileAndFolder	Type boolean Properties Create, Filter, Update Description Permission for user to create, rename, and delete folders in libraries.
PermissionsTagContent	Type boolean Properties Create, Filter, Update Description Permission for user to add tags when publishing content or editing content details in the library.
PermissionsViewComments	Type boolean Properties Create, Filter, Update Description Permission for user to view comments.

Field	Details
Type	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Provides the type of access a user has to a library. Valid values are: • Library Administrator • Author • Viewer • Custom

ContentWorkspaceSubscription

Represents a subscription for a user following a library. This object is available in API version 42.0 and later.

Supported Calls

`delete()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Only users with Modify All Data permission have access to this object.

Fields

Field	Details
ContentWorkspaceId	Type reference Properties Filter, Group, Sort Description ID of the library. This is a relationship field. Relationship Name ContentWorkspace Relationship Type Lookup

Field	Details
	Refers To ContentWorkspace
UserId	Type reference Properties Filter, Group, Sort Description ID of the user following the library. This is a relationship field. Relationship Name User Relationship Type Lookup Refers To User

ContextParamMap

Represents optional context data for a Conversation or a ConversationParticipant. This object is available in API version 57.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
ContextEntityId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the Conversation or ConversationParticipant record. This field is a polymorphic relationship field. Relationship Type Lookup Refers To Conversation, ConversationParticipant

Field	Details
MapKey	Type string Properties Filter, Group, Nillable, Sort Description The key for the context data.
MapValue	Type string Properties Filter, Nillable, Sort Description The value for the context data.

Contract

Represents a contract (a business agreement) associated with an Account.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Sort, Update Description Required. ID of the Account associated with this contract. This field is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account

Field	Details
ActivatedById	Type reference Properties Filter, Group, Nillable, Sort, Update Description ID of the User who activated this contract. This field is a relationship field. Relationship Name ActivatedBy Relationship Type Lookup Refers To User
ActivatedDate	Type dateTime Properties Filter, Nillable, Sort, Update Description Date and time when this contract was activated.
ActivityMetricId	Type reference Properties Filter, Group, Nillable, Sort Description When Einstein Activity Capture with Activity Metrics is enabled, the ID of the related activity metric. This field is a relationship field. Relationship Name ActivityMetric Refers To ActivityMetric
ActivityMetricRollupId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description When Einstein Activity Capture with Activity Metrics is enabled, the ID of the related activity metric rollup. This field is a relationship field. Relationship Name ActivityMetricRollup Refers To ActivityMetricRollup
AggregationStrategy	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The aggregation strategy when creating a pricing contract. Valid value is <code>Cumulative</code>. This field is available with Revenue Cloud in API version 64.0 and later.
BillingAddress	Type address Properties Filter, Nillable Description The compound form of the billing address. Read-only. See Address Compound Fields for details on compound address fields.
BillingCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the billing address. The maximum size is 40 characters.
BillingCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the billing address of this account. The maximum size is 80 characters.

Field	Details
BillingCountryCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO country code for the contract's billing address.
BillingGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The accuracy of the geocode for the billing address. Possible values are: • Address • Block • City • County • ExtendedZip • NearAddress • Neighborhood • State • Street • Unknown • Zip
BillingLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>BillingLongitude</code> to specify the precise geolocation of a billing address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places.
BillingLongitude	Type double Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description Used with <code>BillingLatitude</code> to specify the precise geolocation of a billing address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places.
<code>BillingPostalCode</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the billing address of this account. The maximum size is 20 characters.
<code>BillingState</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the billing address. The maximum size is 80 characters.
<code>BillingStateCode</code>	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO state code for the contract's billing address.
<code>BillingStreet</code>	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Street address for the billing address.
<code>CompanySignedDate</code>	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date your organization signed the contract.
<code>CompanySignedId</code>	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the user who signed the contract. This field is a relationship field. Relationship Name CompanySigned Relationship Type Lookup Refers To User
ContractNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Number of the contract.
ContractTerm	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Number of months that the contract is valid.
CustomerSignedDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date when the customer signed the contract.
CustomerSignedId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the Contact who signed this contract. This field is a relationship field.

Field	Details
	Relationship Name CustomerSigned
	Relationship Type Lookup
	Refers To Contact
CustomerSignedTitle	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Title of the customer who signed the contract.
Description	Type textarea
	Properties Create, Nillable, Update
	Description Description of the contract.
EndDate	Type date
	Properties Filter, Group, Nillable, Sort,
	Description Read-only. Calculated end date of the contract. This value is calculated by adding the <code>ContractTerm</code> to the <code>StartDate</code> . If the Auto-calculate Contract End Date setting is disabled, the contract end date is editable.
HasContractCotermination	Type boolean
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description Indicates whether the contract can be coterminated (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . This field is available with Revenue Cloud in API version 65.0 and later.
IsPricingContract	Type boolean

Field	Details
	Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the contract has related contract item prices (<code>true</code>) or if there are no contract item prices for the contract (<code>false</code>). This field is available with Revenue Cloud in API version 63.0 and later.
IsDeleted	Type boolean Properties Defaulted on create or filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). The label is Deleted.
LastActivityDate	Type date Properties Filter, Group, Nillable, Sort Description Value is the most recent: • The due date of the most recent event is logged against the record. • The due date of the most recently closed task associated with the record.
LastApprovedDate	Type dateTime Properties Filter, Nillable, Sort Description Last date the contract was approved.
LastReferencedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type datetime

Field	Details
	Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (<code>LastReferencedDate</code>) but didn't view it.
OwnerExpirationNotice	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Number of days ahead of the contract end date (15, 30, 45, 60, 90, and 120). Used to notify the owner in advance that the contract is ending.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the user who owns the contract. This field is a relationship field. Relationship Name Owner Relationship Type Lookup Refers To User
Pricebook2Id	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the pricebook, if any, associated with this contract.
PricingSource	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description Source of the pricing for the contract. Valid values are: • <code>LastTransaction</code> • <code>PriceBookListPrice</code>—Price Book or List Price Available in API version 60.0 and later.
<code>RecordTypeId</code>	Type reference Properties Create, Filter, Nillable, Update Description ID of the record type assigned to this object.
<code>RenewalTerm2</code>	Type double Properties Create, Filter, Nillable, Sort, Update Description The default subscription term for renewals. For example, if the Renewal Term Unit is months and you want a 6-month term, set the Renewal Term to 6. Available in API version 60.0 and later.
<code>RenewalTermUnit</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The unit of time for a subscription term. Valid values are: • <code>Annual</code>—UI label is Years • <code>Months</code> • <code>Quarterly</code>—Available in API version 61.0 and later. • <code>Semi-Annual</code>—Available in API version 61.0 and later. Available in API version 60.0 and later.
<code>ShippingAddress</code>	Type address Properties Filter, Nillable

Field	Details
	Description The compound form of the shipping address. Read-only. See Address Compound Fields for details on compound address fields.
ShippingCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details of the shipping address. City maximum size is 40 characters.
ShippingCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details of the shipping address. Country maximum size is 80 characters.
ShippingCountryCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO country code for the contract's shipping address.
ShippingGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The accuracy of the geocode for the shipping address. Valid values are: • Address • Block • City • County • ExtendedZip • NearAddress • Neighborhood • State

Field	Details
	• Street • Unknown • Zip Available in API version 60.0 and later.
ShippingLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>ShippingLongitude</code> to specify the precise geolocation of a shipping address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places.
ShippingLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>ShippingLatitude</code> to specify the precise geolocation of an address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places.
ShippingPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details of the shipping address. The postal code maximum size is 20 characters.
ShippingState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details of the shipping address. The maximum size for the state is 80 characters.
ShippingStateCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO state code for the contract's shipping address.

Field	Details
ShippingStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The street address of the shipping address. The maximum size is 255 characters.
SourceQuoteId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the source quote associated with this contract. This field is available with Revenue Cloud in API version 64.0 and later. This field is a relationship field. Relationship Name Contract Relationship Type Lookup Refers To Quote
SpecialTerms	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Special terms that apply to the contract.
StartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Start date for this contract. The label is Contract Start Date.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description The picklist of values that indicate order status. Each value is within one of two status categories defined in <code>StatusCode</code>. For example, the status picklist may contain: Ready to Ship, Shipped, Received as values within the Activated <code>StatusCode</code>. Valid values are: - Activated - Draft - In Approval Process Available in API version 60.0 and later.
<code>StatusCode</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The status category for the contract. A contract can be Draft, InApproval, or Activated. Label is Status Category. Valid values are: - Activated - Draft - InApproval Available in API version 60.0 and later.
<code>UnitPriceUplift</code>	Type percent Properties Create, Filter, Nillable, Sort, Update Description Indicates the percentage increase of a line item's unit price. This field is available with Revenue Cloud in API version 64.0 and later.

Usage

The Contract object represents a business agreement.

The `Status` field specifies the current state of a contract. Status strings (defined in the `ContractStatus` object) represent its current state (Draft, InApproval, or Activated).

Client applications must initially create a Contract in a non-Activated state. Client applications can subsequently activate a Contract by updating it and setting the value in its `Status` field to `Activated`; however, the `Status` field is the only field you can update when activating the Contract.

After a Contract has been activated, your client application can't change its status; however, before activation, your client application can change the status value from `Draft` to `InApproval` via the API. Also, your client application can delete contracts whose status is `Draft` or `InApproval` but not when a contract status is `Activated`.

Client applications can use the API to create, update, delete, and query any Attachment associated with a contract.

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AccountChangeEvent (API version 46.0)

Change events are available for the object.

ContractFeed (API version 18.0)

Feed tracking is available for the object.

ContractHistory

History is available for tracked fields of the object.

SEE ALSO:

- [ContractContactRole](#)
- [ContractStatus](#)

ContractContactRole

Represents the role that a Contact plays on a Contract.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
ContactId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the Contact associated with this Contract. This is a relationship field. Relationship Name Contact

Field	Details
	Relationship Type Lookup Refers To Contact
ContractId	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the Contract. This is a relationship field. Relationship Name Contract Relationship Type Lookup Refers To Contract
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted .
IsPrimary	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Specifies whether this Contact plays the primary role on this Contract (<code>true</code>) or not (<code>false</code>). Each contract has one primary contact role. Default is <code>false</code> . Labels is Primary .
Role	Type picklist Properties Create, Filter, Nillable, Group, Sort, Update

Field	Details
	Description Name of the role played by the Contact on this Contract, such as Decision Maker, Approver, Buyer, and so on. Must be unique—there can't be multiple records in which the <code>ContractId</code> , <code>ContactId</code> , and <code>Role</code> values are identical. Different contacts can play the same role on the same contract. A contact can play different roles on the same contract.

SEE ALSO:

[ContractStatus](#)

ContractLineItem

Represents a product covered by a service contract (customer support agreement). This object is available in API version 18.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
<code>AssetId</code>	Type reference Properties Create, Filter, Nillable, Update Description Required. ID of the Asset associated with the contract line item. Must be a valid asset ID.
<code>Description</code>	Type textarea Properties Create, Nillable, Update Description Description of the contract line item.
<code>Discount</code>	Type percent Properties Create, Filter, Nillable, Update

Field	Details
	Description The discount for the product as a percentage. When updating, if you specify <code>Discount</code> without specifying <code>TotalPrice</code>, the <code>TotalPrice</code> will be adjusted to accommodate the new <code>Discount</code> value, and the <code>UnitPrice</code> will be held constant. If you specify both <code>Discount</code> and <code>Quantity</code>, you must also specify either <code>TotalPrice</code> or <code>UnitPrice</code> so the system can determine which one to automatically adjust.
EndDate	Type date Properties Create, Filter, Nillable, Update Description The last day the contract line item is in effect.
LastReferencedDate	Type date Properties Filter, Nillable, Sort, Update Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type date Properties Filter, Nillable, Sort, Update Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
LineItemNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Update Description Automatically-generated number that identifies the contract line item.
ListPrice	Type currency

Field	Details
	Properties Filter, Nillable Description Corresponds to the <code>UnitPrice</code> on the <code>PricebookEntry</code> that is associated with this line item, which can be in the standard pricebook or a custom pricebook. A client application can use this information to show whether the unit price (or sales price) of the line item differs from the pricebook entry list price.
<code>LocationId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The location associated with the contract line item. If you have access to the location entity, it doesn't necessarily mean you can access the location id field. To access the location, you must have <code>userHasLocation</code> user access.
<code>ParentContractLineItemId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The line item's parent line item, if it has one.
<code>PricebookEntryId</code>	Type reference Properties Create, Filter, Update Description Required. ID of the associated <code>PricebookEntry</code>. Only exists if <code>Product2</code> is enabled.
<code>Product2Id</code>	Type reference Properties Filter, Group, Nillable, Sort Description The product related to the contract line item.
<code>Quantity</code>	Type double

Field	Details
	Properties Create, Filter, Update Description Number of units of the contract line item (product) included in the associated service contract.
RootContractLineItemId	Type reference Properties Filter, Group, Nillable, Sort Description (Read only) The top-level line item in a contract line item hierarchy. Depending on where a line item lies in the hierarchy, its root could be the same as its parent.
ServiceContractId	Type reference Properties Create, Filter Description Required. ID of the ServiceContract associated with the contract line item. Must be a valid service contract ID.
StartDate	Type date Properties Create, Filter, Nillable, Update Description The first day the contract line item is in effect.
Status	Type picklist Properties Filter, Nillable Description Status of the contract line item.
Subtotal	Type currency Properties Filter, Nillable Description Contract line item's sales price multiplied by the <code>Quantity</code> .

Field	Details
TotalPrice	Type currency Properties Filter, Nillable Description This field is available only for backward compatibility. It represents the total price of the ContractLineItem. If you specify <code>Discount</code> and <code>Quantity</code>, this field or <code>UnitPrice</code> is required. This field is nillable, but you can't set both <code>TotalPrice</code> and <code>UnitPrice</code> to null in the same update request. To insert the <code>TotalPrice</code> for a contract line item via the API (given only a unit price and the quantity), calculate this field as the unit price multiplied by the quantity.
UnitPrice	Type currency Properties Create, Filter, Update Description The unit price for the contract line item. In the user interface, this field's value is calculated by dividing the total price of the contract line item by the quantity listed for that line item. Label is Sales Price. This field or <code>TotalPrice</code> is required. You can't specify both. If you specify <code>Discount</code> and <code>Quantity</code>, this field or <code>TotalPrice</code> is required.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ContractLineItemChangeEvent](#) (API version 44.0)

Change events are available for the object.

[ContractLineItemFeed](#)

Feed tracking is available for the object.

[ContractLineItemHistory](#)

History is available for tracked fields of the object.

ContractLineOutcome

Represents information on a contract line outcome's captured data and other related parameters that are used when capturing data. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- Field Service must be enabled.
- Entitlements must be enabled.

Fields

Field	Details
CalculationMethod	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The method used for calculating the contract line outcome's captured data to determine the outcome value. Select Average or As Captured to calculate the contract line outcome. Average calculates the outcome value based on the average of all data captured to date. As Captured calculates the outcome value based on the asset's current data at the time of the compliance check. Possible values are: • AsCaptured • Average
CaptureFrequency	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The frequency at which data capturing and contract compliance check for the contract line outcome occurs. Possible values are: • Daily • Monthly • Weekly
ComplianceStatus	Type picklist

Field	Details
	Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Indicates if the criteria were met. Compliant–The outcome is compliant with the contract. Not Compliant–The outcome isn’t compliant with the contract. Not Available–The outcome’s compliance information isn’t available yet. Invalid–The outcome isn’t valid because the option selected for the Criteria Field of the recordset filter criteria was deleted. To restart the calculation, create a new contract line outcome. Possible values are: - Compliant - Invalid - NotAvailable - NotCompliant The default value is NotAvailable.
ContractLineItemId	Type reference Properties Create, Filter, Group, Sort, Update Description The contract line item associated with the contract line outcome. This field is a relationship field. Relationship Name ContractLineItem Relationship Type Lookup Refers To ContractLineItem
Description	Type textarea Properties Create, Nillable, Update Description A description of the contract line outcome.
EndDate	Type dateTime Properties Create, Filter, Sort, Update

Field	Details
	Description The contract line outcome's data capture end date.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the contract line outcome was last modified. Its UI label is Last Modified Date.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the contract line outcome was last viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the contract line outcome.
NextDataCaptureDate	Type dateTime Properties Filter, Nillable, Sort Description The date of the next data capture and compliance check based on the capture frequency. The date is auto-populated and updated after each capture
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The contract line outcome's owner. By default, the owner is the user who created the contract line outcome record. Its UI label is Contract Line Outcome Owner. This field is a polymorphic relationship field.

Field	Details
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
RecordsetFilterCriteriaId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The ID of the recordset filter criteria in which the contract line outcome's conditions are defined. This field is a relationship field.
	Relationship Name RecordsetFilterCriteria
	Relationship Type Lookup
	Refers To RecordsetFilterCriteria
ServiceContractId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description The service contract associated with the contract line item and the contract line outcome. This field is a relationship field.
	Relationship Name ServiceContract
	Relationship Type Lookup
	Refers To ServiceContract
StartDate	Type dateTime
	Properties Create, Filter, Sort, Update

Field	Details
	Description The contract line outcome's data capture start date.

Usage

Use this object to define the data capture frequency and other related parameters that are used when capturing data in order to evaluate a service contract's compliance.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ContractLineOutcomeChangeEvent](#) on page 68

Change events are available for the object.

[ContractLineOutcomeFeed](#) on page 55

Feed tracking is available for the object.

[ContractLineOutcomeHistory](#) on page 63

History is available for tracked fields of the object.

[ContractLineOutcomeOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[ContractLineOutcomeShare](#) on page 67

Sharing is available for the object.

SEE ALSO:

[ContractLineOutcomeData](#)

ContractLineOutcomeData

Represents the contract line outcome's captured data. It stores the data that was captured between the contract line outcome's start date and end date. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- Field Service must be enabled.
- Entitlements must be enabled.

Fields

Field	Details
CalculatedValue	Type double Properties Filter, Nillable, Sort Description The value calculated based on the contract line outcome's calculation method and the captured data.
CaptureDate	Type dateTime Properties Create, Filter, Sort, Update Description The date and time when the data was captured.
ContractLineOutcomeId	Type reference Properties Create, Filter, Group, Sort Description The contract line outcome associated with the contract line outcome data record. This field is a relationship field. Relationship Name ContractLineOutcome Relationship Type Lookup Refers To ContractLineOutcome
KeyPerformanceIndicator	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The key performance indicators (fields or asset attributes) that define the contract line outcome's compliance status.
LastReferencedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The date and time when the contract line outcome data record was last modified. Its UI label is Last Modified Date.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the contract line outcome data record was last viewed.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the contract line outcome data record.
Value	Type double Properties Create, Filter, Nillable, Sort, Update Description The actual value of the key performance indicator.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ContractLineOutcomeDataChangeEvent](#) on page 68

Change events are available for the object.

[ContractLineOutcomeDataFeed](#) on page 55

Feed tracking is available for the object.

[ContractLineOutcomeDataHistory](#) on page 63

History is available for tracked fields of the object.

[ContractLineOutcomeDataOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[ContractLineOutcomeDataShare](#) on page 67

Sharing is available for the object.

ContractStatus

Represents the status of a Contract, such as Draft, InApproval, Activated, Terminated, or Expired.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. Because changing terms in our code can break current implementations, we maintained this object's name.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
ApiName	Type string Properties Filter, Group, idLookup, Sort Description Uniquely identifies a picklist value so it can be retrieved without using an id or primary label.
IsDefault	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this is the default contract status value (<code>true</code>) or not (<code>false</code>) in the picklist.
MasterLabel	Type string Properties Filter, Group, Nillable, Sort Description Label for this contract status value. This display value is the internal label that does not get translated.
SortOrder	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description Number used to sort this value in the contract status picklist. These numbers are not guaranteed to be sequential, as some previous contract status values might have been deleted.
StatusCode	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Code indicating the status of a contract. One of the following values: - Draft - InApproval - Activated Two other values (Terminated and Expired) are defined but are not available for use via the API.

Usage

This object represents a value in the contract status picklist. The contract status picklist provides additional information about the status of a Contract, such as its current state (Draft, InApproval, or Activated). You can query these records to retrieve the set of values in the contract status picklist, and then use that information while processing Contract objects to determine more information about a given contract. For example, the application could test whether a given contract is activated based on its Status value and the value of the StatusCode property in the associated ContractStatus object.

SEE ALSO:

[ContractContactRole](#)

ContractTag

Associates a word or short phrase with a Contract.

Supported Calls

create(), delete(), describeSOObjects(), query(), retrieve()

Fields

Field Name	Details
ItemId	Type reference Properties Create, Filter Description ID of the tagged item.
Name	Type string Properties Create, Filter Description Name of the tag. If this value does not already exist, a new TagDefinition is created and becomes the parent of this Tag object. Otherwise, a TagDefinition with the same name becomes the parent of this Tag object. Parent relationships are created automatically.
TagDefinitionId	Type reference Properties Filter Description ID of the parent TagDefinition object that owns the tag.
Type	Type picklist Properties Create, Filter, Restricted picklist Description Defines the visibility of a tag. Valid values: • Public—The tag can be viewed and manipulated by all users in an organization. • Personal—The tag can be viewed or manipulated only by a user with a matching OwnerId.

Usage

ContractTag stores the relationship between its parent TagDefinition and the Contract being tagged. Tag objects act as metadata, allowing users to describe and organize their data.

When a tag is deleted, its parent TagDefinition will also be deleted if the name is not being used; otherwise, the parent remains. Deleting a TagDefinition sends it to the Recycle Bin, along with any associated tag entries.

ConvAnalysisSummary

Represents the information stored for each run or refresh of Sales Signals. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Users need the Sales Signals permission set and the Sales Signals feature must be enabled.

Fields

Field	Details
AnalysisDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date when the actual data analysis was done, accounting for the delay between the refresh start time and the data analysis.
DataModelVersion	Type string Properties Create, Filter, Group, Nillable, Sort Description The data model version generated by Hawking.
Error	Type textarea Properties Create, Nillable, Update Description The error message sent by Hawking when a refresh fails.
FlowIdentifier	Type string

Field	Details
	Properties Create, Filter, Group, Sort Description Required. The UUID used to track the Hawking flow ID.
RefreshDate	Type dateTime Properties Create, Filter, Sort Description Required. The date when the admin started the refresh of their ECI data for processing.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. The status of the refresh or run. Possible values are: • FAILED • PARTIALLY_FAILED • PROCESSING • SUCCESS
TotalCalls	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The total number of calls that were analyzed for Sales Signals.
TotalMentions	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The total number of mentions or keywords that were analyzed.

ConvAnalysisTopic

Represents a topic generated from the Sales Signals refresh or run. For example, a product experiencing issues due to high pricing could be a topic identified through the analysis of multiple calls. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Users need the Sales Signals permission set and the Sales Signals feature must be enabled.

Fields

Field	Details
CallPercentage	Type double Properties Create, Filter, Sort Description Required. The percentage of calls that apply to a topic, out of the total number of calls that were analyzed.
Category	Type string Properties Create, Filter, Group, Sort Description Required. A classification or grouping used to filter topics. This field is used in conjunction with <code>Keyword</code> .
ConvAnalysisSummaryId	Type reference Properties Create, Filter, Group, Sort Description Required. The conversation analysis summary associated with the topic. This field is a relationship field. Relationship Name ConvAnalysisSummary

Field	Details
	Relationship Type Master-detail Refers To ConvAnalysisSummary (the parent object)
GenerationsIdentifier	Type string Properties Create, Filter, Group, Sort Description Required. The ID used to track the LLM-generated response for feedback purposes.
Keyword	Type string Properties Create, Filter, Group, Sort Description Required. A specific word used in conjunction with <code>Category</code> to filter topics. For example, <code>Product : Salesforce</code> , where the keyword is Salesforce.
MentionCount	Type int Properties Create, Filter, Group, Sort Description Required. The number of call insights associated with the topic.
Order	Type int Properties Create, Filter, Group, Sort Description Required. A numerical value used to sort topics in a sequence.
Summary	Type textarea Properties Create, Update Description Required. A detailed explanation of the topic.

Field	Details
Title	Type string Properties Create, Filter, Group, Sort, Update Description Required. The title of the topic that describes it.
TopicSentiment	Type string Properties Create, Filter, Group, Nillable, Sort Description The sentiment of the topic, whether it's negative, neutral, or positive.
TotalCalls	Type int Properties Create, Filter, Group, Nillable, Sort Description The total number of calls analyzed for the topic.
TotalCallsForCategoryKeyword	Type int Properties Create, Filter, Group, Nillable, Sort Description The total number of calls analyzed for <code>category: keyword</code>. Multiple topics can be under a single <code>category: keyword</code>.
TotalMentionsForCategoryKeyword	Type int Properties Create, Filter, Group, Nillable, Sort Description The total number of mentions analyzed for <code>category: keyword</code>.
TurnIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort

Field	Details
	Description UUID that is generated and used to track a group of LLM-generated content.

ConvAnalysisTopicEntry

Represents a single entry under the ConvAnalysisTopic object. An entry represents a segment of a video or voice call that is associated with a conversation analysis topic. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Users need the Sales Signals permission set and the Sales Signals feature must be enabled.

Fields

Field	Details
BulletGenerationsIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort Description The generation ID used to track the LLM-generated response for feedback purposes.
CallId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The unique identifier of the voice or video call that corresponds to the entry. This field is a polymorphic relationship field. Relationship Name Call Refers To VideoCall, VoiceCall

Field	Details
ConvAnalysisTopicId	Type reference Properties Create, Filter, Group, Sort Description Required. The conversation analysis topic associated with the entry. This field is a relationship field. Relationship Name ConvAnalysisTopic Relationship Type Master-detail Refers To ConvAnalysisTopic (the parent object)
SnippetStartTime	Type double Properties Create, Filter, Nillable, Sort, Update Description The timestamp when the call is associated with the current topic entry.
Summary	Type textarea Properties Create, Nillable, Update Description The LLM-generated call summary that corresponds to the parent topic.

Conversation

Represents a conversation between an end user and an agent. Available in API version 49.0 and later.



Note: This object is available for Einstein Conversation Insights customers whose data is stored natively on the Salesforce Platform. If you turned on Einstein Conversation Insights for the first time starting in Spring '26, this object is available to query and access using Salesforce tools. For existing ECI customers, data migration and access to related Salesforce Platform objects is scheduled to begin in Summer '26.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
ConversationChannelId	Type reference Properties Filter, Group, idLookup, Sort Description The record ID of the channel used to initialize the conversation. This can either be a messaging channel for the Messaging product or a call center for the Service Cloud Voice product. Available in API version 50.0 and later.
ConversationIdentifier	Type string Properties Filter, Group, idLookup, Sort Description A unique identifier generated for the conversation.
EndTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time that a conversation ends.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The autogenerated name of the conversation.
StartTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time that a conversation starts.

ConversationApiLog

Logs of an API operation on a specific conversation object done using the Conversation Service API. This object is available in API version 63.0 and later.

This object stores the logs of operations done on the [Conversation Service API](#). The Conversation Service API enables you to interact with conversational data on the Conversation Platform, offering tools to manage, access, and maintain your data effectively.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Action	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The specific action performed using the Conversation Service API. Possible values are: • Delete
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Autogenerated name of the logs.
Operation	Type string Properties Create, Filter, Group, Sort Description Name of the operation that triggered the Conversation Service API log.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Owner ID that triggered the Conversation API log. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
RequestedById	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The User ID that triggered the Conversation API log. This field is a relationship field. Relationship Name RequestedBy Refers To User
RequestedDate	Type dateTime Properties Create, Filter, Sort Description The date of the operation that triggered the Conversation API log.
RequestedEntityIdentifier	Type string Properties Create, Filter, Group, Sort Description The entity ID being created, updated, or deleted.
RequestedEntityType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The type of entity being created, updated, or deleted. Possible values are:

Field	Details
	• <code>MessagingEndUser</code>—Messaging End User
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The status of the Conversation API operation. Possible values are: • <code>Completed</code> • <code>Enqueued</code> • <code>Failed</code> • <code>InProgress</code>—In Progress • <code>Requested</code>

ConversationContextEntry

Represents the context of a message or an event in the chat history between an agent and a messaging user. This object is available in API version 47.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, only authenticated internal and external users can access this object.

Fields

Field	Details
<code>ConversationContextEntryName</code>	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The autogenerated number of the entry.

Field	Details
CustomDetailContextKey	Type textarea Properties Create, Nillable Description The key or name of the pre-chat field specified by the admin in the pre-chat implementation, for example, <code>customer_email</code>.
CustomDetailContextValue	Type textarea Properties Create, Nillable Description The value entered in the pre-chat field by a user before starting the chat.
ParentId	Type reference Properties Create, Filter, Group, Sort Description The Conversation ID this entry is associated with.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ConversationContextChangeEvent (API version 62.0)

Change events are available for the object.

ConversationChannelDefinition

Represents a configurable definition of a conversation channel that's implemented for Interaction Service for Bring Your Own Channel for Messaging and Bring Your Own Channel for CCaaS messaging channels. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, interaction service must be configured. Access to standard objects requires Salesforce admin privileges or the Customize Application permission.

Fields

Field	Details
<code>CapabilitiesSupportsCustomChannelParameters</code>	Type boolean Properties Create, Filter, Update Description Indicates whether admins can configure custom parameters and parameter mappings for messaging channels. Custom parameters and parameter mappings are used to pass additional information at runtime to Omni-Channel flows. The default value is <code>false</code>. Available in API version 61.0.
<code>CapabilitiesSupportsDoubleOptInConsent</code>	Type boolean Properties Filter Description Indicates whether the channel supports (<code>true</code>) the Double Opt-In consent level. The default value is <code>false</code>. If set to true, then <code>capabilitiesSupportsExplicitConsent</code> must also be set to true. This field is optional and isn't supported for Bring Your Own Channel for Messaging. It's only supported for Bring Your Own Channel for CCaaS.
<code>CapabilitiesSupportsExplicitConsent</code>	Type boolean Properties Filter Description Indicates whether the channel supports (<code>true</code>) the Explicit Opt-In consent level. This field is optional.
<code>CapabilitiesSupportsImplicitConsent</code>	Type boolean Properties Filter Description Indicates whether the channel supports (<code>true</code>) the Implicit Opt-In consent level. This value is required and must always be set to true. The default value is false.

Field	Details
CapabilitiesSupportsIsoCountryCode	Type boolean Properties Filter Description Indicates whether the channel supports (<i>true</i>) ISO country codes. The default value is false.
CapabilitiesSupportsKeywords	Type boolean Properties Filter Description Indicates whether the channel supports (<i>true</i>) keywords. The default value is false.
ConnectedAppOAuthLink	Type string Properties Filter, Group, Sort Description DO NOT SET OR CHANGE THIS VALUE. This value is automatically generated. This field represents the OAuth link for the external client app (ECA) or connected app if the ConnectedAppType is <i>Partner</i>. This is a string identifier to the ECA or connected app containing the partner Org ID and the consumer ID minus the key prefixes.
ConnectedAppType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The owner of the external client app (ECA) or connected app used to manage authentication between Salesforce Interaction Service and the Messaging or CCaaS partner's system. Possible values are: • <i>Partner</i> • <i>Customer</i> The default value is <i>Partner</i>. If set to <i>Partner</i>, the partner creates the ECA or connected app and includes it in their managed package. If set to <i>Customer</i>, the admin creates the ECA or connected app. Available in API version 62.0.
ConsentOwner	Type picklist

Field	Details
	Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The system the customer uses to manage consent levels. Possible values are: • Partner • Salesforce The default value is <i>Salesforce</i>. For example, if set to <i>Salesforce</i>, consent levels are managed by the Salesforce system. If set to <i>Partner</i>, consent levels are managed by the partner's telephony system. For Bring Your Own Channel for Messaging, this value must be set to <i>Salesforce</i>.
ConversationVendorInfoId	Type reference Properties Filter, Group, Nillable, Sort Description The <i>ConversationChannelDefinition.ConversationVendorInfoId</i> value used to link this record to the ConversationVendorInfo record. For example, 0m8000000000000123. This field is a relationship field. Relationship Name ConversationVendorInfo Relationship Type Lookup Refers To ConversationVendorInfo
customEventChnlAddrIdField	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The mapping field that points to the custom field used to point to the <i>ChannelAddressIdentifier</i> field. This field is deprecated in API version 60.0 and will be removed in API version 61.0. Use a combination of <i>customEventTypeField</i> and <i>customEventPayloadField</i> instead.
CustomEventPayloadField	Type picklist

Field	Details
	Properties Filter, Group, Restricted picklist, Sort Description The mapping field that points to the custom field used to point to the <code>Payload</code> field in the format <code><orgNamespace>__<CustomFieldName>__c</code>. This is the API name of the custom Payload field in the custom platform event. For example, <code>devorg__Payload__c</code>.
<code>customEventRecipientField</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The mapping field that points to the custom field used to point to the Recipient field. This field is deprecated in API version 60.0 and will be removed in API version 61.0. Use a combination of <code>customEventTypeField</code> and <code>customEventPayloadField</code> instead.
<code>CustomEventTypeField</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The mapping field that points to the custom field used to point to the Platform event type (EventType) field, in the format <code><orgNamespace>__<CustomFieldName>__c</code>. This is the API name of the custom EventType field in the custom platform event. For example, <code>devorg__EventType__c</code>.
<code>CustomIconId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description For Bring Your Own Channel for Messaging and Bring Your Own Channel for CCaaS, this field represents the name of the status resource image used to identify the channel integration, such as a channel logo. For the best results, set the image size to 50px x 50px and save the image in SVG file format. This field is optional. Available in API version 61.0 and later. This field is a relationship field. Relationship Name CustomIcon Relationship Type Lookup

Field	Details
	Refers To StaticResource
CustomPlatformEvent	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The API name of the custom platform event created for the Interaction Service API in the format <code><orgNamespace>__<CustomPlatformEventName>__e</code> . For example, <code>devorg__TestEvent__e</code> .
CustomerConnectedAppOAuthLink	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description DO NOT SET OR CHANGE THIS VALUE. This value is automatically generated. This field represents the OAuth link for the external client app or connected app created by an admin if the ConnectedAppType is <code>Customer</code> . Available in API version 62.0.
DeveloperName	Type string Properties Filter, Group, Sort Description The unique name of the custom metadata type object in the API in the format <code><Prefix>_<ConversationChannelDefinition></code> , where <i>Prefix</i> matches the prefix you gave to the name of the Interaction Service external client app or connected app. For example, <code>Partner1_ChannelDefinition1</code> , where <code>Partner1</code> is the prefix and <code>ChannelDefinition1</code> is the given name.
ExtCapabilitiesInboundAckOptInExposed	Type boolean Properties Create, Filter, Update Description Indicates whether the partner supports read receipts and delivery receipts for inbound messages (<code>true</code>) or whether the partner doesn't support these inbound acknowledgments and the functionality is hidden from the Salesforce admin in the Messaging settings (<code>false</code>). The default value is <code>false</code> . This field is available in API version 65.0 and later. Use this field instead of <code>IsInboundReceiptsEnabled</code> .

Field	Details
EventCapabilitiesProgressIndicatorExposed	Type boolean Properties Create, Filter, Update Description Indicates whether the partner supports progress indicators for AI agents (<code>true</code>) or whether the partner doesn't support them and the functionality is hidden from the Salesforce admin in the Messaging settings (<code>false</code>). The default value is <code>false</code>. This field is available in API version 65.0 and later.
EventCapabilitiesRoutingWorkResultSupported	Type boolean Properties Create, Filter, Update Description Indicates whether the Routing Work Result event is sent as a Custom Platform event (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>. This field is available in API version 65.0 and later. Use this field instead of <code>IsRoutingWorkResultEnabled</code>.
EventCapabilitiesTypingIndicatorOptionHidden	Type boolean Properties Create, Filter, Update Description Indicates whether the partner doesn't support typing indicators for outbound messages and the functionality is hidden from the Salesforce admin in the Messaging settings (<code>true</code>) or whether outbound typing indicators are supported by the partner (<code>false</code>). The default value is <code>false</code>, meaning the outbound typing indicator feature is supported by default. To disable the outbound typing indicator feature, set this value to <code>true</code>. This field is available in API version 65.0 and later. Use this field instead of <code>IsTypingIndicatorDisabled</code>.
IsConferenceSupported	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the partner supports conferencing for Bring Your Own Channel (<code>true</code>), or not (<code>false</code>). With conferencing, more than two participants are allowed in a Messaging session. The default is <code>false</code>. This field is available in API version 64.0 and later.

Field	Details
IsInboundReceiptsEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the partner supports read receipts and delivery receipts for inbound messages (<code>true</code>) or whether the partner doesn't support these inbound acknowledgements and the functionality is hidden from the Salesforce admin in the Messaging settings (<code>false</code>). The default value is <code>false</code>. Available in API versions 63.0 to 65.0. In API version 66.0 and later, this field is removed. Use <code>EventCapabilitiesIsInboundAcknwOptionExposed</code> instead.
IsRoutingWorkResultEnabled	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the Routing Work Result event is sent as a Custom Platform event or not. The default value is <code>false</code>. Available in API versions 64.0 and 65.0. In API version 66.0 and later, this field is removed. Use <code>EventCapabilitiesIsRoutingWorkResultSupported</code> instead.
IsTypingIndicatorDisabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the partner doesn't support typing indicators for outbound messages and the functionality is hidden from the Salesforce admin in the Messaging settings (<code>true</code>) or whether outbound typing indicators are supported by the partner (<code>false</code>). The default value is <code>false</code>, meaning the outbound typing indicator feature is supported by default. To disable the outbound typing indicator feature, set this value to <code>true</code>. Available in API versions 63.0 to 65.0. In API version 66.0 and later, this field is removed. Use <code>EventCapabilitiesIsTypingIndicatorOptionHidden</code> instead.
MasterLabel	Type string Properties Filter, Group, Sort

Field	Details
	Description The UI label name for the custom metadata type object in the API. This name appears in several places in the UI, so include the partner channel name for easy identification. For example, Channel Definition 1.
MaxParticipantsForCnfrOverride	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Specifies the limit for how many participants can be in a messaging conference. If set, this field overrides the platform limit for the number of participants in a conference. If not set or if set to a value higher than the messaging platform limit, the limit defaults to the messaging platform limit of how many participants can be in a messaging conference at one time. This field is available in API version 64.0 and later.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <i>NamespacePrefix</i> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, <i>NamespacePrefix</i> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix. <i>NamespacePrefix</i> is null if the publisher is Salesforce.
RoutingOwner	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The system the customer uses to manage routing for Bring Your Own Channel for Messaging or Bring Your Own Channel for CCaaS.

Field	Details
	Possible values are: • <code>Partner</code> • <code>Salesforce</code> The default value is <code>Salesforce</code>. For example, if set to <code>Salesforce</code>, routing is managed by the Salesforce system. If set to <code>Partner</code>, routing is managed by the partner's system. For Bring Your Own Channel for Messaging, this value must be set to <code>Salesforce</code>.

ConversationEntry

Represents a message or event in a voice call or messaging session. The schema on this page only applies to conversation entries for legacy chat. Refer to the ConversationEntry (Off-Core) schema in the [Messaging Object Model](#) guide to see the ConversationEntry schema for Enhanced Channels. This object is available in API version 43.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To use the ConversationEntry object, enable the Access Conversation Entries user permission, which is available in API version 50.0 and later. Earlier versions do not require permissions.

Fields

Field	Details
<code>ActorId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the author. The possible values can be <code>null</code> or any ID in the following domain set: • <code>BotDefinition</code> • <code>LiveChatVisitor</code> • <code>MessagingEndUser</code> • <code>User</code> This is a polymorphic relationship field.

Field	Details
	Relationship Name Actor
	Relationship Type Lookup
	Refers To MessagingEndUser, User
ActorName	Type string
	Properties Create, Filter, Nillable, Sort
	Description The name of the author sending the message or event.
ActorType	Type picklist
	Properties Create, Filter, Group, Restricted picklist, Sort
	Description The author of this entry in the chat history. The valid values include: • Agent • Bot • EndUser • Supervisor • System
ClientDuration	Type int
	Properties Create, Filter, Group, Nillable, Sort
	Description The length in milliseconds for the entry. This field is used with voice messages and other applicable use cases. This value may be 0 if not set by the client. This field is available in API version 51.0 and later.
ClientTimestamp	Type dateTime
	Properties Create, Filter, Nillable, Sort

Field	Details
	Description The timestamp sent by the client when it generated the entry. This field is available in API version 51.0 and later.
ConversationId	Type reference Properties Create, Filter, Group, Sort Description The MessagingSession ID this entry belongs to. This is a polymorphic relationship field. Relationship Name Conversation Relationship Type Lookup Refers To MessagingSession, VoiceCall
EntryEndTime	Type datetime Properties Create, Filter, Nillable, Sort Description The timestamp that this entry ended in the chat history. This field is available in API version 48.0 and later.
EntryTime	Type datetime Properties Create, Filter, Sort Description The timestamp of this entry in the chat history.
EntryTimeMillisecs	Type int Properties Create, Filter, Group, Nillable, Sort Description The milliseconds value for the time when an entry was received by the server. Note that the related <code>EntryTime</code> field does not provide millisecond accuracy. This field is available in API version 51.0 and later.

Field	Details
EntryType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The type of entry in the chat history. Can be a message (<code>text</code>) or an event. The possible values include: • <code>Text</code> • <code>AdminOptedIn</code> • <code>AdminOptedOut</code> • <code>BotEscalated</code> • <code>ChatbotClosedIdleSession</code> • <code>ChatbotEndedChatByAction</code>—Conversation ended by automated action • <code>ChatbotEndedTransferNotConfigured</code>—Conversation ended because transfer fail is not configured • <code>ChatbotEstablished</code> • <code>ChatbotNotEstablished</code> • <code>EndUserOptedIn</code> • <code>EndUserOptedOut</code>
HasAttachments	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether a message has attachments associated with it (<code>true</code>) or not (<code>false</code>).
Message	Type textarea Properties Create, Nillable Description The message or event sent by the author. In ConversationEntry records for enhanced Messaging channels or Messaging for In-App and Web, the Message field is blank due to data storage differences from standard channels.
MessageDeliverTime	Type datetime Properties Create, Filter, Nillable, Sort

Field	Details
	Description Unused field reserved for future use.
MessageIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort Description The unique ID for the message. Maximum size is 36 characters.
MessageReadTime	Type datetime Properties Create, Filter, Nillable, Sort Description Unused field reserved for future use.
MessageSendTime	Type datetime Properties Create, Filter, Nillable, Sort Description Unused field reserved for future use.
MessageStatus	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The status of the message sent by the author. The valid values include: • Delivered • Error • Pending • Read • Sent
MessageStatusCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The code associated with a message status. <code>MessageStatusCode</code> is only populated when a message is undeliverable
Seq	Type int Properties Create, Filter, Group, Sort Description The sequence position of this entry in the chat history.
ServerReceivedTimestamp	Type dateTime Properties Create, Filter, Nillable, Sort Description The timestamp recorded when the server received the entry. This is a unique value and is used for ordering. This value can also be referred to as the “transcripted timestamp.” This field is available in API version 51.0 and later.

Usage

 **Important:** The schema on this page only applies to conversation entries for legacy chat. The legacy chat product is in maintenance-only mode, and we won't continue to build new features. Refer to the [ConversationEntry \(Off-Core\)](#) schema in the [Messaging Object Model](#) guide to see the ConversationEntry schema for Enhanced Channels.

In standard SMS, WhatsApp, and Facebook Messenger channels, a ConversationEntry record is created for each message sent by a messaging end user or an agent, bot, or automation. Each ConversationEntry record is associated with a MessagingSession record, which represents the interaction between the messaging end user and the business. Access and work with ConversationEntry records like any standard object. You can report on messaging activity and track the conversation workflow end to end. You can also download or delete transcripts, redact sensitive text, and customize your workflows with solutions built on the ConversationEntry object.

In enhanced Messaging channels, Messaging for In-App and Web, and Service Cloud Voice (“enhanced channels”), inbound and outbound messages are processed in one of two ways depending on your location.

- A ConversationEntry record is created but the `Message` field is blank, or
- No ConversationEntry record is created.

To get the fullest picture of conversations in enhanced channels, use Data Cloud, the Connect REST API, or the Conversation Transcript Export tool to access transcripts. See [Accessing Messaging and Voice Conversation Data](#).

 **Note:** ConversationEntry records aren’t created until the messaging session ends and the agent closes the session tab. One exception is for the first message in any standard messaging session, whose ConversationEntry record is created immediately.

ConversationParticipant

Represents an active participant in a conversation. A new ConversationParticipant record is created each time a participant joins a conversation. This object is available in API version 49.0 and later.



Note: This object is available for Einstein Conversation Insights customers whose data is stored natively on the Salesforce Platform. If you turned on Einstein Conversation Insights for the first time starting in Spring '26, this object is available to query and access using Salesforce tools. For existing ECI customers, data migration and access to related Salesforce Platform objects is scheduled to begin in Summer '26.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
AppType	Type string Properties Filter, Group, Nillable, Sort Description The type of app used by the participant, such as messaging, chatbot, live_message, agent. The nillable property is available in API version 51.0 and later.
ConversationId	Type reference Properties Filter, Group, Nillable, Sort Description The record ID of the conversation that this participant is part of.
JoinedTime	Type dateTime Properties Filter, Sort Description The date and time that a participant joined a conversation.
LastActiveTime	Type dateTime Properties Filter, Sort

Field	Details
	Description The date and time that a participant was last active during a conversation.
LeftTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time that a participant left a conversation.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The autogenerated name of the conversation participants.
ParticipantContext	Type string Properties Filter, Group, Nillable, Sort Description An identifier, such as a Facebook page, to add context about this participant.
ParticipantEntityId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the record connected to this participant record, such as a Contact, Messaging End User, or User record.
ParticipantKey	Type string Properties Filter, idLookup, Group, Nillable, Sort Description A value that uniquely identifies this participant.
ParticipantRole	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort
	Description The role of this participant in the conversation, such as Agent, End User, or Supervisor.

ConvIntelligenceSignalRule

Represents a conversation intelligence signal rule. The rule triggers actions based on real-time intelligence signals from your telephony system or keywords mentioned by support reps or customers. The rule contains a set of conditions (subrules) and the filter logic used to evaluate those conditions to determine whether to trigger actions. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

This type requires an add-on license for Service Cloud Voice for Amazon Connect, Service Cloud Voice for Partner Telephony with Amazon Connect, Service Cloud Voice for Partner Telephony, or Digital Engagement.

Fields

Field	Details
ActionType	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description Required. Action to take based on the conversation intelligence signal detected during a conversation. Possible values are: Possible values are: - AlertSupervisor—Sends an alert to the supervisor. - AlertSupervisorAndAgent—Sends an alert to the rep and supervisor. - LaunchFlow—Triggers an auto-launched flow. If set, also set <code>ActionValue</code>. - LaunchNBA—Recommends the next best action to the rep.
ActionValue	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Action to perform based on the <code>ActionType</code> specified. If <code>ActionType</code> is set to <code>LaunchFlow</code>, this value is the <code>DeveloperName</code> of the flow to be launched. For example, <code>EmailAlert</code>. For all other <code>ActionType</code> values, don't set this parameter.
<code>ConversationChannelId</code>	Type reference Properties Create, Filter, Group, Sort, Update Description Required. ID (<code>ChannelAddressIdentifier</code>) of the Messaging channel or name (<code>InternalName</code>) of the Voice channel. This field is a polymorphic relationship field. Relationship Name ConversationChannel Refers To CallCenter, MessagingChannel
<code>Criteria</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Required. Filter logic applied to the rule conditions (subrules). For example, <code>((1 AND 2) OR 3)</code>. The numbers in the formula are derived from the <code>ConvIntelligenceSignalSubrule.Order</code> value plus 1. For example, filter logic <code>(1 AND 2)</code> is calculated by adding the first condition (<code>Order=0</code>) with the second condition (<code>Order=1</code>).
<code>DeveloperName</code>	Type string Properties Required. Create, Filter, Group, Sort, Update Description API name of the conversation intelligence signal rule.
<code>IsActive</code>	Type boolean

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Required. Indicates whether the conversation intelligence signal rule is active (<code>true</code>) or inactive (<code>false</code>). The default value is <code>false</code>.
Label	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Name of the conversation intelligence signal rule.
ParticipantRole	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description If <code>Service</code> is set to <code>KeywordMatch</code>, this value determines whether the rule applies to utterances made by reps, customers, or both roles. Possible values are: Possible values are: • <code>Agent</code> • <code>AgentOrCustomer</code> • <code>Customer</code> If <code>Service</code> is not set to <code>KeywordMatch</code>, don't set this parameter.
Service	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Required. Salesforce- or partner-provided intelligence source. For Salesforce-provided intelligence sources, set this parameter to <code>KeywordMatch</code>. For partner-provided intelligence sources, possible values are: • <code>AmazonConnectContactLens</code> If none of the options apply to you, contact your Salesforce representative for the service name.

ConvIntelligenceSignalSubRule

Represents a condition (subrule) within a conversation intelligence signal rule. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

This type requires an add-on license for Service Cloud Voice for Amazon Connect, Service Cloud Voice for Partner Telephony with Amazon Connect, Service Cloud Voice for Partner Telephony, or Digital Engagement.

Fields

Field	Details
ConvIntelligenceSignalRuleId	Type reference Properties Create, Filter, Group, Sort Description Unique ID of the conversation intelligence signal rule. This field is a relationship field. Relationship Name ConvIntelligenceSignalRule Relationship Type Master-detail Refers To ConvIntelligenceSignalRule (the master object)
OperandValue	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Value of the signal type used to determine if the rule condition is met. For example, <code>escalate_level_1</code>.
Operator	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description Filter logic operator used to determine if the rule condition is met. Possible values are: • <code>Equals</code> • <code>GreaterThan</code> • <code>LessThan</code> • <code>NotEquals</code>
Order	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Order the condition appears in relation to the other conditions in the list, with zero (0) being the first condition listed. If <code>Type</code> is set to <code>Keyword</code>, the maximum value is 24. For all other <code>Type</code> values, the maximum value is 4. This value is used when applying filter logic to the rule.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Type of conversation intelligence signal used by the rule to determine whether to trigger an action. This value depends on the <code>ConvIntelligenceSignalRule.ConversationChannelId</code> and <code>ConvIntelligenceSignalRule.Service</code> values. If <code>Service</code> is set to <code>KeywordMatch</code>, possible values are: • <code>Keyword</code>—A word or group of words spoken or typed. If <code>Service</code> is set to <code>AmazonConnectContactLens</code>, possible values are: • <code>Category</code>—Category name defined in your telephony system. If <code>Service</code> is set to another value, contact your Salesforce representative for the conversation intelligence signal types available for your intelligence source.

ConvMessageSendRequest

Represents a request to send a template-based messaging component to a series of messaging users in an enhanced messaging channel or Messaging for In-App. This object is available in API version 60.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Messaging and its associated objects are available only in Enterprise, Unlimited, and Developer Editions for Service Cloud or Sales Cloud with the Digital Engagement add-on license.

Fields

Field	Details
AllowExistingSessionStatus	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Indicates whether the message can be sent only at certain times. Possible values are: - Any—Send the message regardless of whether the messaging user is engaged in an active messaging session with the business. - Closed—Send the message unless the messaging user is engaged in a messaging session with a status other than Error or Ended, in which case it's never sent. - NonActive—Send the message unless the messaging user is engaged in a messaging session with a status of Active, in which case it's never sent.
CommSubscriptionId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the related communication subscription, if applicable. This field is a relationship field that refers to CommSubscription.
CompletedDate	Type dateTime Properties Filter, Nillable, Sort Description Date and time when the request completes and all messages associated with the request are sent or failed to be sent.
FailedMessageCount	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort

Field	Details
	Description The number of messages that failed to be delivered to a messaging user. For example, if a flow sends the message to 50 messaging users and 4 don't receive the message, this value is 4.
FailedMessageErrorReasons	Type textarea Properties Nullable Description The error reason for each of the failed messages. For example, if 4 messages fail to send, this field shows the error reason for each failed message.
FailedMessageIdentifiers	Type textarea Properties Nullable Description The IDs of the messages that failed to send. For example, if 4 messages fail to send, this field shows 4 message IDs.
FailedMessagePlatformKeys	Type textarea Properties Filter, Group, Nullable, Sort Description A list of platform keys for messaging end users with messages that failed to send. Available in API version 65.0 and later.
InProgressMessageCount	Type int Properties Defaulted on Create, Filter, Group, Sort Description The number of messages in the process of being sent.
InProgressMessageIdentifiers	Type textarea Properties Filter, Group, Nullable, Sort Description A list of IDs of the messages being sent.

Field	Details
InProgressMessagingEndUserIds	Type textarea Properties Filter, Group, Nillable, Sort Description A list of IDs of messaging end users with messages that are being sent. Available in API version 65.0 and later.
InProgressMessagingSessionIds	Type textarea Properties Filter, Group, Nillable, Sort Description A list of IDs of messaging sessions with messages that are being sent. Available in API version 65.0 and later.
InProgressMeuPlatformKeys	Type textarea Properties Filter, Group, Nillable, Sort Description A list of platform keys for messaging end users with messages that are being sent. Available in API version 65.0 and later.
MessageDefinition	Type string Properties Filter, Group, Sort Description The name of the messaging component being sent. Only active messaging components can be sent.
MessageDefinitionParameters	Type textarea Properties Nillable Description A list of parameters used to dynamically construct the message that is being sent. Available in API version 65.0 and later.
Name	Type string

Field	Details
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description An auto-generated ID for the request that uses the format MSJ-{00000000}.
PendingMessageCount	Type int
	Properties Filter, Group, Sort
	Description The number of messages that haven't yet been sent.
PendingMessageEndUserIds	Type textarea
	Properties Nillable
	Description A list of IDs of the messaging end users with pending messages. Available in API version 65.0 and later.
PendingMeuPlatformKeys	Type textarea
	Properties Nillable
	Description A list of platform keys of the messaging end users with pending messages. Available in API version 65.0 and later.
PendingMessageIdentifiers	Type textarea
	Properties Nillable
	Description A list of IDs of the pending messages.
RequestConsentType	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description Indicates whether the flow applies the consent settings of the messaging end user or the communication subscription.

Field	Details
	Possible values are: • CommunicationSubscription • MessagingEndUser
RequestStatus	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The status of the request. Possible values are: • Completed • Pending • In Progress—The system is actively trying to send the message. If a message can't be sent, the RequestStatus returns to Pending and sending is tried again later.
RequestType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of request. Possible values are: • SendNotificationMessages
SessionLongevityPreference	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates whether to end the session after the message is sent. Possible values are: • KeepSessionOpen—After the flow sends the message, keep the messaging session in a New state. If the end user doesn't respond within 48 hours, the session ends. Use this option if you expect customers to respond to automated messages and want service reps to see their response in context. • EndSession—After the flow sends the message, end the messaging session. If the customer responds, a new messaging session is created and routed to your support team. • KeepSessionOpenOrAppend—If there's an existing session with the messaging end user in the New state, use that session to send the message. Otherwise, follow the

Field	Details
	behavior documented for the <code>KeepSessionOpen</code> option. Available in API version 65.0 and later.
<code>ShouldEnforceChannelConsent</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the existing Messaging channel consent preferences are applied when determining who receives the message. Setting this value to <code>true</code> is the most common approach. The default value, <code>false</code>, allows you to add custom consent logic—for example, to customize a flow to send the message to both implicitly opted-in users and explicitly opted-in users.
<code>SuccessMessageCount</code>	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The number of messages that were successfully sent to messaging users. Delivery can occur much later than sending, depending on factors such as the connectivity status of the recipient. Delivery is reflected in the messaging session transcript.
<code>SuccessMessageIdentifiers</code>	Type textarea Properties Nillable Description A list of IDs of the messages that were sent.
<code>SuccessMeuPlatformKeys</code>	Type textarea Properties Filter, Group, Nillable, Sort Description A list of platform keys for messaging end users with messages that were sent. Available in API version 65.0 and later.
<code>TotalMessageCount</code>	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of messages that the related flow attempted to send. This field is a calculated field.

Usage

A `ConvMessageSendRequest` can be generated by a flow, Apex code, or REST API call that invokes the `sendConversationMessages` invocable action. Use the `ConvMessageSendRequest` object to query messages sent by the `sendConversationMessages` invocable action.

ConversationVendorInfo

This setup object connects the partner vendor system to the Service Cloud feature. For example, for Service Cloud Voice, this object contains information about the partner telephony or Contact Center as a Service (CCaaS) partner system. For Bring Your Own Channel for Messaging this object contains information about the partner messaging system, and for Bring Your Own Channel for CCaaS, this object contains information about the CCaaS partner system. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

This object requires an add-on license for Service Cloud Voice for Partner Telephony or Digital Engagement.

Fields

The fields in the `ConversationVendorInfo` object apply to all Service Cloud features unless otherwise stated in the field description. For example, if a field applies to just one Service Cloud Voice telephony model setup or is applied differently by different partner systems, this is stated in the field description.

Field	Details
<code>AwsAccountKey</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The 12-digit AWS subaccount ID that's automatically provisioned for you when Service Cloud Voice was turned on. Available in API version 55.0 and later. Applies to the following implementation: • Service Cloud Voice with Amazon Connect

Field	Details
AwsRootEmail	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description The email address used by Salesforce to create the root user for the provisioned AWS subaccount when Service Cloud Voice was turned on. Available in API version 55.0 and later. Applies to the following implementation: • Service Cloud Voice with Amazon Connect
AwsTenantVersion	Type double Properties Create, Filter, Nillable, Sort, Update Description The version number of the SVCTenantStack AWS CloudFormation stack that's deployed. The stack is deployed in AWS region "us-east-1". Available in API version 55.0 and later. Applies to the following implementation: • Service Cloud Voice with Amazon Connect
agentSSOSupported	Type boolean Properties Create, Filter, Group, Update Description If set to <code>true</code>, agents can single sign-on (SSO) into their contact center using Salesforce as the identity provider (IdP). Behind the scenes, Salesforce is used as the SAML IdP in the Single Sign-On connected app for the contact center. If set to <code>false</code>, an IdP other than Salesforce is used or an IdP isn't used at all. The default value is <code>false</code>. If this value is set to <code>false</code> and you want to use Salesforce as the IdP for your contact center, set this value and the <code>namedCredentialSupported</code> value to <code>true</code> and configure the <code>service_cloud_voice.PartnerSSO</code> interface in your Apex integration class. Available in API version 53.0 and later. Applies to the following implementations: • Service Cloud Voice with Partner Telephony • Service Cloud Voice with Partner Telephony from Amazon Connect • Bring Your Own Channel for CCaaS
BridgeComponent	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The Lightning component used to communicate between the telephony or messaging system and other Lightning components. Applies to the following implementations: • Service Cloud Voice with Partner Telephony • Service Cloud Voice with Partner Telephony from Amazon Connect • Bring Your Own Channel for CCaaS
CapabilitiesSupportsIntelligence	Type boolean Properties Create, Filter, Update Description If set to <code>true</code>, Salesforce ingests real-time signals sent from a partner telephony system. If set to <code>false</code>, Salesforce doesn't ingest real-time intelligence signals from a partner telephony system. The default value is <code>false</code>. Available in API version 59.0 and later. Applies to the following implementations: • Service Cloud Voice with Partner Telephony
CapabilitiesSupportsKeyProvisioning	Type boolean Properties Create, Filter, Update Description If set to <code>true</code>, Salesforce has permission to automatically provision public keys to contact centers. The default value is <code>false</code>. Available in API version 54.0 and later. Applies to the following implementation: • Service Cloud Voice with Partner Telephony
CapabilitiesSupportsMultiVendorConfig	Type boolean Properties Create, Filter, Update Description Indicates whether multiple Connector URLs are supported (<code>true</code>) or not supported (<code>false</code>) for contact centers. The default value is <code>false</code>. Available in API version 65.0 and later.

Field	Details
	Applies to this telephony model: Service Cloud Voice with Partner Telephony
CapabilitiesSupportsPartnerPhoneNumbers	Type boolean Properties Create, Filter, Update Description If set to <code>true</code>, Salesforce has permission to access relevant agents' phone numbers while configuring contact center channels. The default value is <code>false</code>. Available in API version 54.0 and later. Applies to the following implementation: Service Cloud Voice with Partner Telephony
CapabilitiesSupportsQueueManagement	Type boolean Properties Create, Filter, Update Description If set to <code>true</code>, support queue management. The default value is <code>false</code>. Available in API version 56.0 and later. Applies to the following implementations: - Service Cloud Voice with Partner Telephony - Service Cloud Voice with Partner Telephony from Amazon Connect - Bring Your Own Channel for CCaaS
CapabilitiesSupportsUnifiedRouting (Beta)	Type boolean Properties Create, Filter, Update Description Indicates whether unified routing is supported (<code>true</code>) or not supported (<code>false</code>) for inbound voice calls in voice channels. The default value is <code>false</code>. Once this value is set to <code>true</code>, it can't be changed to <code>false</code>. Available in API version 63.0 and later. Applies to the following implementation: Service Cloud Voice with Partner Telephony
ClientAuthMode	Type picklist

Field	Details
	Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The client authentication mode. Possible values are: • Custom • Mixed • SSO Applies to the following implementations: • Service Cloud Voice with Partner Telephony • Service Cloud Voice with Partner Telephony from Amazon Connect
ConnectorUrl	Type url Properties Create, Filter, Group, Sort, Update Description The URL that hosts your Service Cloud Voice or Bring Your Own Channel for CCaaS connector. This value could be a Visualforce page or a public URL. Applies to the following implementations: • Service Cloud Voice with Partner Telephony • Service Cloud Voice with Partner Telephony from Amazon Connect • Bring Your Own Channel for CCaaS
customConfig	Type CustomEntityDefinition Properties Create, Filter, Group, Update Description The foreign key to the CustomEntityDefinition, which contains partner-specific custom settings. Available in API version 53.0 and later. Applies to the following implementations: • Service Cloud Voice with Partner Telephony • Service Cloud Voice with Partner Telephony from Amazon Connect • Bring Your Own Channel for CCaaS
CustomIconId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description ID of the static resource used to identify the contact center integration, such as a Contact Center as a Service (CCaaS) provider logo. The static resource must be in SVG format. This field is optional. Available in API version 62.0 and later. This field is a relationship field. Applies to the following implementations: • Service Cloud Voice with Partner Telephony • Bring Your Own Channel for CCaaS This field is a relationship field. Relationship Name CustomIcon Refers To StaticResource
CustomLoginUrl	Type url Properties Create, Filter, Group, Nillable, Sort, Update Description The URL that hosts your telephony system or CCaaS system login page. Applies to the following implementations: • Service Cloud Voice with Partner Telephony • Service Cloud Voice with Partner Telephony from Amazon Connect • Bring Your Own Channel for CCaaS
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API.  Note: Only users with View DeveloperName or View Setup and Configuration permissions can view, group, sort, and filter this field.
IsTaxCompliant	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Indicates whether the Amazon tax settings for the AWS subaccount provisioned for Service Cloud Voice have been confirmed (<code>true</code>). The default value is <code>false</code>. Available in API version 55.0 and later. Applies to the following implementation: • Service Cloud Voice with Amazon Connect
<code>einsteinConversationInsightsSupported</code>	Type boolean Properties Create, Filter, Group, Update Description If set to <code>true</code>, Einstein Conversation Insights is turned on. The default value is <code>false</code>. Available in API version 53.0 and later. Applies to the following implementations: • Service Cloud Voice with Partner Telephony • Service Cloud Voice with Partner Telephony from Amazon Connect
<code>integrationClass</code>	Type ApexClass Properties Create, Filter, Group, Update Description The foreign key to the partner Apex class implementing supported interfaces. Available in API version 53.0 and later. Applies to the following implementations: • Service Cloud Voice with Partner Telephony • Service Cloud Voice with Partner Telephony from Amazon Connect • Bring Your Own Channel for CCaaS
<code>IntegrationClassName</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Deprecated in API version 53.0. Don't set this field. Instead, use <code>integrationClass</code>. Applies to the following implementations: • Service Cloud Voice with Partner Telephony • Service Cloud Voice with Partner Telephony from Amazon Connect

Field	Details
keyProvisioningSupported	Type boolean Properties Create, Filter, Group, Update Description If set to <code>true</code>, key provisioning and renewal are automated. The default value is <code>false</code>. Available in API version 54.0 and later. Applies to the following implementations: • Service Cloud Voice with Partner Telephony • Service Cloud Voice with Partner Telephony from Amazon Connect
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the master label (<code>MasterLabel</code>) in the user interface. Applies to the following implementations: • Service Cloud Voice with Partner Telephony • Service Cloud Voice with Partner Telephony from Amazon Connect • Bring Your Own Channel for CCaaS
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The partner vendor's display name as it appears in the UI. This name appears in several places in the UI, so include the partner vendor name for easy identification. For Service Cloud Voice, this label also represents the telephony provider name in the contact center record. For Service Cloud Voice with Amazon Connect, this field is always set to <code>Service Cloud Voice</code>.
namedCredential	Type Named Credential Properties Create, Filter, Group, Update Description A sample-named credential that can be used for Apex callouts to the partner system. Available in API version 53.0 and later. Applies to the following implementations:

Field	Details
	• Service Cloud Voice with Partner Telephony • Service Cloud Voice with Partner Telephony from Amazon Connect • Bring Your Own Channel for CCaaS
namedCredentialSupported	Type boolean Properties Create, Filter, Group, Update Description If set to <code>true</code> and if supported by the partner telephony, then prescriptive setup through a named credential is enabled allowing server-to-server communication with a named credential. Available in API version 53.0 and later. Applies to the following implementations: • Service Cloud Voice with Partner Telephony • Service Cloud Voice with Partner Telephony from Amazon Connect • Bring Your Own Channel for CCaaS
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that's associated with this object. Applies to the following implementations: • Service Cloud Voice with Amazon Connect • Service Cloud Voice with Partner Telephony • Service Cloud Voice with Partner Telephony from Amazon Connect • Bring Your Own Channel for CCaaS
partnerContactCenterListSupported	Type boolean Properties Create, Filter, Group, Update Description If set to <code>true</code>, enables the customer to select one contact center from a list of multiple contact centers to connect with Salesforce. The default value is <code>false</code>. Available in API version 53.0 and later. Applies to the following implementations: • Service Cloud Voice with Partner Telephony • Service Cloud Voice with Partner Telephony from Amazon Connect

Field	Details
	Bring Your Own Channel for CCaaS
partnerPhoneNumbersSupported	Type boolean Properties Create, Filter, Group, Update Description If set to <code>true</code>, displays a list of phone numbers used to create contact center channels. The default value is <code>false</code>. Available in API version 54.0 and later. Applies to the following implementations: - Service Cloud Voice with Partner Telephony - Service Cloud Voice with Partner Telephony from Amazon Connect
partnerTransferDestinationsSupported	Type boolean Properties Create, Filter, Group, Update Description If set to <code>true</code>, allows Salesforce to fetch contact center queues so that Salesforce and contact center queues can be mapped. The default value is <code>false</code>. Available in API version 53.0 and later. Applies to the following implementations: - Service Cloud Voice with Partner Telephony - Service Cloud Voice with Partner Telephony from Amazon Connect - Bring Your Own Channel for CCaaS
ServerAuthMode	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Deprecated in API 53.0. Server authentication mode. Set this value to <code>None</code>. Applies to the following implementations: - Service Cloud Voice with Partner Telephony - Service Cloud Voice with Partner Telephony from Amazon Connect
TelephonySettingsComponent	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The name of the Lightning Web Component (LWC) that is used to display additional agent settings in the Omni-Channel widget. This value is in the format <code>mynamespace:componentName</code>, where <code>mynamespace</code> is the namespace associated with the Service Cloud Voice package that was created, and <code>componentName</code> is the FQDN of the Lightning component. Available in API version 54.0 and later. Applies to the following implementation: • Service Cloud Voice with Partner Telephony
<code>universalCallRecordingAccessSupported</code>	Type boolean Properties Create, Filter, Group, Update Description If set to <code>true</code>, Universal Call Recording Access is turned on. The default value is <code>false</code>. If this value is set to <code>false</code> and you want to turn on Universal Call Recording, set this value to <code>true</code> and configure the <code>service_cloud_voice.RecordingMediaProvider</code> interface in your Apex integration class. Available in API version 54.0 and later. Applies to the following implementations: • Service Cloud Voice with Partner Telephony • Service Cloud Voice with Partner Telephony from Amazon Connect
<code>userSyncingSupported</code>	Type boolean Properties Create, Filter, Group, Update Description If set to <code>true</code>, supports automated user syncing whenever a user is added to or removed from a contact center. The default value is <code>false</code>. Available in API version 53.0 and later. Applies to the following implementations: • Service Cloud Voice with Partner Telephony • Service Cloud Voice with Partner Telephony from Amazon Connect • Bring Your Own Channel for CCaaS
<code>vendorType</code>	Type picklist Properties Create, Filter, Group, Update

Field	Details
	Description The Service Cloud feature the partner vendor supports. Possible values are: • <code>Amazon_Connect</code> — For Service Cloud Voice with Amazon Connect. • <code>BringYourOwnChannelPartner</code> — For Bring Your Own Channel for Messaging. Available in API version 60.0 and later. • <code>BringYourOwnContactCenter</code> — For Bring Your Own Channel for Contact Center as a Service (CCaaS). Available in API version 60.0 and later. • <code>ServiceCloudVoicePartner</code> — For Service Cloud Voice with Partner Telephony or Service Cloud Voice with Partner Telephony from Amazon Connect. If you're inserting or updating the record, this field must be set. Available in API version 53.0 and later.

CorsWhitelistEntry

Represents an entry in the cross-origin resource sharing (CORS) allowlist. Origins included in the allowlist can request REST resources from that Salesforce org.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. Because changing terms in our code can break current implementations, we maintained this object's name.

Supported Calls

`create()`, `delete()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
<code>DeveloperName</code>	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the record in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. This field is automatically generated but you can supply your own value if you create the record using the API.

Field Name	Details
	 Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance may slow while Salesforce generates one for each record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description This picklist contains the following fully-supported languages: - Chinese (Simplified): <code>zh_CN</code> - Chinese (Traditional): <code>zh_TW</code> - Danish: <code>da</code> - Dutch: <code>nl_NL</code> - English: <code>en_US</code> - Finnish: <code>fi</code> - French: <code>fr</code> - German: <code>de</code> - Italian: <code>it</code> - Japanese: <code>ja</code> - Korean: <code>ko</code> - Norwegian: <code>no</code> - Portuguese (Brazil): <code>pt_BR</code> - Russian: <code>ru</code> - Spanish: <code>es</code> - Spanish (Mexico): <code>es_MX</code> Spanish (Mexico) defaults to Spanish for customer-defined translations. - Swedish: <code>sv</code> - Thai: <code>th</code> The Salesforce user interface is fully translated to Thai, but Help is in English.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Primary label for the CORS allowlist entry.

Field Name	Details
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description For managed packages, this field is the namespace prefix assigned to the package. For unmanaged packages, this field is blank.
UrlPattern	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The origin URL pattern must include the HTTPS protocol (unless you're using your localhost) and a domain name, and can include a port. The wildcard character (*) is supported and must be in front of a second-level domain name. For example, <code>https://*.example.com</code> adds all subdomains of <code>example.com</code> to the allowlist. The origin URL pattern can be an IP address. But an IP address and a domain that resolve to the same address aren't the same origin, and you must add them to the CORS allowlist as separate entries. Google Chrome™ and Mozilla® Firefox® browser extensions are also allowed as resources in API version 53 and later. Chrome extensions must use the prefix <code>chrome-extension://</code> and 32 characters without digits or capital letters, for example <code>chrome-extension://abdkkegmcbiomijcbdaodaf1gehffed</code>. Firefox extensions must use the prefix <code>moz-extension://</code> and an 8-4-4-12 format of small alphanumeric characters, for example <code>moz-extension://1234ab56-78c9-1df2-3efg-4567891hi1j2</code>.

Usage

Cross-Origin Resource Sharing (CORS) allows web browsers to request resources from other origins. For example, using CORS, the JavaScript for a web application at `https://www.example.com` can request a resource from `https://www.salesforce.com`. To allow access to supported Salesforce APIs, Apex REST resources, and Lightning Out from JavaScript code in a web browser, add the requesting origin to your Salesforce CORS allowlist.

If a browser that supports CORS makes a request to an origin in the Salesforce CORS allowlist, Salesforce returns the origin in the `Access-Control-Allow-Origin` HTTP header, along with any additional CORS HTTP headers. If the origin isn't included in the allowlist, Salesforce returns HTTP status code 403.



Important: CORS doesn't support requests for unauthenticated resources, including OAuth endpoints. You must pass an OAuth token with requests that require it.

[CORS](#) is a W3C recommendation to enable browsers to request resources from origins other than their own.

Coupon

A coupon associated with a promotion. This object is available in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The Coupon object is available only if the B2B Commerce license is enabled.

Fields

Field	Details
CouponCode	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Coupon code for the coupon. A buyer can use the coupon code to qualify for a promotion.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Description of the coupon.
EndDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description The end date and time when the coupon is no longer active.
LastReferencedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the coupon.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of this coupon. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Field	Details
PromotionId	Type reference Properties Create, Filter, Group, Sort Description ID of the promotion associated with the coupon. This is a relationship field. Relationship Name Promotion Relationship Type Lookup Refers To Promotion
RedemptionLimitAllBuyers	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Number of times this coupon can be used in total. This field is available in API version 61.0 and later.
RedemptionLimitPerBuyer	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Number of times this coupon can be used per customer. This field is available in API version 61.0 and later.
StartDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The start date and time when the coupon is active.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description Status of the coupon. Possible values are: • <code>Active</code> • <code>Inactive</code> The default value is <code>Inactive</code>

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[CouponChangeEvent](#) on page 68 (API version 62.0)

Change events are available for the object.

CouponCodeRedemption

Tracks each coupon code redemption. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available through the B2B Commerce license. To access this object, the Promotions Coupon Redemption Limit user permission must be assigned.

Fields

Field	Details
<code>Buyer</code>	Type <code>string</code> Properties <code>Create</code> , <code>Filter</code> , <code>Group</code> , <code>Sort</code> Description Information about the buyer. Can be any buyer-specific information.

Field	Details
CouponId	Type reference Properties Create, Filter, Group, Sort Description ID of the redeemed coupon. This field is a relationship field. Relationship Name Coupon Relationship Type Lookup Refers To Coupon
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Salesforce generated coupon code, such as CCR-000000002. Can't be edited.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who created the coupon code redemption. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
Transaction	Type string Properties Create, Filter, Group, idLookup, Sort Description ID of the transaction where the coupon code was redeemed. Must be a valid cart ID.

CreditMemo

Represents a document that is used to reduce the amount that a buyer owes a seller under the terms of an earlier invoice. This object is available in API version 48.0 and later.

A credit memo always decreases the balance of an invoice. Users can apply positive credit memos to positive invoices, for example, a \$10 credit memo reduces the balance of a \$100 invoice line to \$90.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`

Special Access Rules

This object is available with Order Management, Subscription Management, and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
AppType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Read-only field that indicates which Salesforce application generated the credit memo. Possible values are: • Commerce Cloud • Revenue Cloud This field is available in API versions 54.0 to 55.0
Balance	Type currency Properties Filter, Nillable, Sort Description Amount of the credit memo that's available for allocation.
BillToContactId	Type reference

Field	Details
	Properties Filter, Group, Nillable, Sort, Update Description Inherited from the account's Bill to Account field. This field is a relationship field. Relationship Name BillToContact Relationship Type Lookup Refers To Contact
BillingAccountId	Type reference Properties Filter, Group, Sort, Update Description The customer account associated with this credit memo. This field is a relationship field. Relationship Name BillingAccount Relationship Type Lookup Refers To Account
CreationMode	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates whether the credit memo originated in Salesforce or an external system. Possible values are: • External • Salesforce This field is available in API version 55.0 and later.
CreditDate	Type date

Field	Details
	Properties Filter, Group, Nillable, Sort Description The date when the credit memo was posted.
CreditMemoNumber	Type string Properties Filter, Group, Nillable, Sort, Update Description A credit memo numbering alternative to DocumentNumber, containing a number in a format of your choice. Credit memo numbering is optional.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Three-letter ISO 4217 currency code associated with the credit memo. The default value is USD. This field is available in API version 55.0 and later.
Description	Type string Properties Filter, Group, Nillable, Sort, Update Description Description of the credit memo.
DocumentNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description System-generated number for organizing financial documents, for example DOC-0000123.
EffectiveDate	Type date Properties Filter, Group, Nillable, Sort

Field	Details
	Description Represents the effective date of the credit memo. If this field is empty, the credit date is used. For reporting purposes only; this field drives no other logic. This field is available in API version 55.0 and later.
ExternalReference	Type string Properties Filter, Group, Nillable, Sort, Update Description Contains an external system's ID for the credit memo. This field is available in API version 55.0 and later.
ExternalReferenceDataSource	Type string Properties Filter, Group, Nillable, Sort, Update Description Contains the name of the external system that also contains the credit memo. This field is available in API version 55.0 and later.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was only referenced (<code>LastReferencedDate</code>) and not viewed.
NetCreditsApplied	Type currency Properties Filter, Nillable, Sort

Field	Details
	Description Represents the total difference between the credit applied to and credit unapplied from the invoice. This field is a calculated field. This field is available in API version 55.0 and later.
OwnerId	Type reference Properties Filter, Group, Sort, Update Description The user who owns a credit memo record. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ReferenceEntityId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The ID of the record that this credit memo was generated from. For example, the order, order summary, or invoice. This field is a polymorphic relationship field. Relationship Name ReferenceEntity Relationship Type Lookup Refers To Invoice, Order This field is available in API version 53.0 and later.
SourceAction	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates which Salesforce API created the credit memo.

Field	Details
	Possible values are: • Invoice—Indicates that Credit Invoice API created the credit memo and applied it to the invoice. • NegativeInvoiceLineConversion—Indicates that Subscription Management created the credit memo when a negative invoice line was converted. • Standalone—Indicates that the Credit Memo API created the credit memo. • VoidPostedInvoice—Indicates that the Void a Posted Invoice API created the credit memo to offset the amount that was voided on the invoice. This field is available in API version 55.0 and later.
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort, Update Description Status of the credit memo. Possible values are: • Canceled—Indicates that the credit memo isn't being used and doesn't have a financial impact. • Error—Indicates that the credit memo has an error and doesn't have a financial impact. • Pending—Indicates that the credit memo is being processed but hasn't yet been posted as a financial transaction. • Posted—The credit memo has been recorded as a financial transaction. Most fields can't be edited.
TotalAdjustmentAmount	Type currency Properties Filter, Nillable, Sort Description Sum of TotalAmount values for the credit memo's adjustment lines. This field is a calculated field.
TotalAdjustmentAmountWithTax	Type currency Properties Filter, Nillable, Sort Description The sum of the credit memo's adjustment line amounts, including tax. This field is available in API version 49.0 and later.

Field	Details
TotalAdjustmentTaxAmount	Type currency Properties Filter, Nillable, Sort Description The sum of the credit memo's adjustment line tax. Adjustment line balances are excluded. This field is available in API version 49.0 and later.
TotalAmount	Type currency Properties Filter, Nillable, Sort Description Sum of the credit memo's TotalLineAmount and TotalAdjustmentAmount. This field is a calculated field.
TotalAmountWithTax	Type currency Properties Filter, Nillable, Sort Description Total credit memo amount, with tax included. This field is a calculated field.
TotalChargeAmount	Type currency Properties Filter, Nillable, Sort Description Sum of TotalAmount values for the credit memo's charge lines. This field is a calculated field.
TotalChargeAmountWithTax	Type currency Properties Filter, Nillable, Sort Description The sum of the credit memo's charge line amounts, including tax. This field is available in API version 49.0 and later.

Field	Details
TotalChargeTaxAmount	Type currency Properties Filter, Nillable, Sort Description This field is available in API version 49.0 and later.
TotalCreditAmountApplied	Type currency Properties Filter, Nillable, Sort Description Credit memo amount that's been applied to invoices. This field is available in API version 53.0 and later.
TotalCreditAmountUnapplied	Type currency Properties Filter, Nillable, Sort Description Credit memo amount that's been unapplied from invoices. This field is available in API version 55.0 and later.
TotalTaxAmount	Type currency Properties Filter, Nillable, Sort Description Sum of <code>TotalAmount</code> values for the credit memo's tax lines. This field is a calculated field.

Associated Objects

This object has the following associated objects. If the API version isn't specified, the associated objects are available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[CreditMemoFeed](#) on page 55

Feed tracking is available for the object.

[CreditMemoHistory](#) on page 63

History is available for tracked fields of the object.

CreditMemoOwnerSharingRule on page 65

Sharing rules are available for the object.

CreditMemoShare on page 67

Sharing is available for the object.

CreditMemoAddressGroup

Stores the buyer's address information, which is used to determine the amount of tax to credit to a buyer when a credit memo is issued. This object is available in API version 55.0 and later.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
Address	Type address Properties Filter, Nillable Description Buyer's address.
City	Type string Properties Filter, Group, Nillable, Sort Description Buyer's city.
Country	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description Buyer's country.
CreditMemoAddressGroupNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-generated number, such as 0000123, that represents the address group.
CreditMemoId	Type reference Properties Filter, Group, Sort Description ID of the credit memo associated with the address group. This field is a relationship field. Relationship Name CreditMemo Relationship Type Lookup Refers To CreditMemo
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Three-letter ISO 4217 currency code associated with the credit memo. The default value is USD.
GeocodeAccuracy	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The accuracy rating for the geocode of the address group. An accuracy rating contains information about the location of a latitude and longitude. Possible values are: • Address

Field	Details
	• Block • City • County • ExtendedZip • NearAddress • Neighborhood • State • Street • Unknown • Zip
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this address group.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this address group.
Latitude	Type double Properties Filter, Nillable, Sort Description Latitude of the buyer's address.
Longitude	Type double Properties Filter, Nillable, Sort Description Longitude of the buyer's address.
PostalCode	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The buyer's postal code or ZIP code.
State	Type string Properties Filter, Group, Nillable, Sort Description The buyer's state.
Street	Type textarea Properties Filter, Group, Nillable, Sort Description The buyer's street number and name.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[CreditMemoAddressGroupHistory](#) on page 63

History is available for tracked fields of the object.

CreditMemoInvApplication

Represents an amount applied from a credit memo to an invoice. This object is available in API version 48.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
Amount	Type currency Properties Filter, Sort Description The amount of the credit memo that was applied to or unapplied from the invoice.
AppliedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the credit memo was applied. If the credit memo invoice application's type is <code>Unapplied</code>, this value is inherited from the Applied date of the credit memo referenced in the AssociatedLineId.
AssociatedLineId	Type reference Properties Filter, Group, Nillable, Sort Description For a credit memo invoice application that represents an unapplied credit memo, this field shows the original credit memo invoice application. This field is a relationship field. Relationship Name AssociatedLine Relationship Type Lookup Refers To CreditMemoInvApplication
CreditMemoBalance	Type currency Properties Filter, Nillable, Sort Description The balance of a credit memo after a credit memo is applied or unapplied. This field is a snapshot of the credit memo's balance after the action. It isn't updated after further changes to the credit memo balance.

Field	Details
CreditMemoId	Type reference Properties Filter, Group, Sort Description The credit memo that was applied or unapplied. This field is a relationship field. Relationship Name CreditMemo Relationship Type Lookup Refers To CreditMemo
CreditMemoInvoiceNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Number of the invoice to which a credit memo is applied.
Date	Type dateTime Properties Filter, Nillable, Sort Description Date when the credit memo amount was applied to the invoice.
Description	Type string Properties Filter, Group, Nillable, Sort, Update Description Description of the credit applied to an invoice.
EffectiveDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The effective date of the application or unapplication of credit. Users can provide this value when applying or unapplying the credit memo. This field is optional and provided only for reporting purposes. It doesn't affect the credit memo invoice application's other fields.
HasBeenUnapplied	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Shows whether this credit memo application has been unapplied from the target invoice. Possible values are: • NA • No • Yes
ImpactAmount	Type currency Properties Filter, Nillable, Sort Description The net adjustment to the invoice's balance after a credit memo is applied or unapplied. If a credit memo was applied, this value is the negative version of the credit memo invoice application's <code>Amount</code>. If a credit memo was unapplied, this value is the positive version of the credit memo invoice application's <code>Amount</code>. This field is a calculated field.
InvoiceBalance	Type currency Properties Filter, Nillable, Sort Description The balance of the credit memo after a credit memo is applied or unapplied. This field is a snapshot of the credit memo's balance after the action. It isn't updated after further changes to the credit memo balance.
InvoiceId	Type reference Properties Filter, Group, Sort Description ID of the invoice to which credit is applied.

Field	Details
	This field is a relationship field. Relationship Name Invoice Relationship Type Lookup Refers To Invoice
Type	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Indicates whether the credit memo line application was generated because of an apply action (application) or an unapply action (unapplication). Possible values are: • Applied • Unapplied
UnappliedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when this application was unapplied from the target invoice.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[CreditMemolnvApplicationFeed](#) on page 55

Feed tracking is available for the object.

[CreditMemolnvApplicationHistory](#) on page 63

History is available for tracked fields of the object.

CreditMemoLine

Represents product, service, adjustment, or tax line items that were included in a credit memo. This object is available in API version 48.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`

Special Access Rules

This object is available with Order Management, Subscription Management, and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
AdjustmentAmount	Type currency Properties Filter, Nillable, Sort, Update Description Amount of this credit memo line item if its type is Adjustment.
AdjustmentAmountWithTax	Type currency Properties Filter, Nillable, Sort Description Sum of the adjustment amount and the adjustment tax amount. This field is available in API version 49.0 and later. This field is available when Subscription Management is enabled.
AdjustmentTaxAmount	Type currency Properties Filter, Nillable, Sort Description Amount of the tax related to the adjustment amount. This field is available in API version 55.0 and later. This field is available when Subscription Management is enabled.
BillingAddressId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description ID of the billing address related to this credit memo line. This field is a relationship field. This field is available in API version 55.0 and later. This field is available when Subscription Management is enabled. Relationship Name BillingAddress Relationship Type Lookup Refers To CreditMemoAddressGroup
ChargeAmount	Type currency Properties Filter, Nillable, Sort, Update Description Amount of this credit memo line item if its type is Charge.
ChargeAmountWithTax	Type currency Properties Filter, Nillable, Sort Description Sum of the adjustment amount and the adjustment tax amount. This field is available in API version 55.0 and later. This field is available when Subscription Management is enabled.
ChargeTaxAmount	Type currency Properties Filter, Nillable, Sort Description Amount of the tax related to the charge amount. This field is available in API version 55.0 and later. This field is available when Subscription Management is enabled.
CreditMemoId	Type reference Properties Filter, Group, Sort

Field	Details
	Description ID of the parent credit memo. This field is a relationship field. Relationship Name CreditMemo Relationship Type Lookup Refers To CreditMemo
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Three-letter ISO 4217 currency code associated with the credit memo line. The default value is USD.
Description	Type string Properties Filter, Group, Nillable, Sort, Update Description Description of the credit memo line.
EndDate	Type date Properties Filter, Group, Nillable, Sort, Update Description For credit memos made from a time-based service, the end date of the line item being credited.
LineAmount	Type currency Properties Filter, Nillable, Sort Description Amount of the credit memo line. This field is a calculated field. This field is available in API version 49.0 and later.

Field	Details
Name	Type string Properties Filter, Group, idLookup, Sort, Update Description Name of the credit memo line.
Product2Id	Type reference Properties Filter, Group, Nillable, Sort, Update Description The product or service being credited in the credit memo line. This field is a relationship field. Relationship Name Product2 Relationship Type Lookup Refers To Product2
ReferenceEntityItemId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The order product or invoice line corresponding to this credit memo line. This field is a polymorphic relationship field. This field is available in API version 53.0 and later. Relationship Name ReferenceEntityItem Relationship Type Lookup Refers To OrderItemSummary, OrderProduct, InvoiceLine
ReferenceEntityType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description The type of transaction that generated the credit memo line. Possible values are: • DeliveryCharge • OrderProduct
ReferenceEntityItemTypeCode	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of object that generated the credit memo line. Possible values are: • Charge • Product
RelatedLineId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The credit memo line related to this line item. This field is a relationship field. Relationship Name RelatedLine Relationship Type Lookup Refers To CreditMemoLine
ShippingAddressId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the shipping address. This field is a relationship field. This field is available in API version 55.0 and later. This field is available when Subscription Management is enabled. Relationship Name ShippingAddress

Field	Details
	Relationship Type Lookup Refers To CreditMemoAddressGroup
StartDate	Type date Properties Filter, Group, Nillable, Sort, Update Description For credit memo lines generated from a time-based service, the first date of the billing for the service.
Status	Type string Properties Filter, Group, Nillable, Sort Description State of the credit memo line. Inherited from the credit memo.
TaxAmount	Type currency Properties Filter, Nillable, Sort, Update Description Total tax for the credit memo.
TaxCode	Type string Properties Filter, Group, Nillable, Sort, Update Description The code used to calculate the tax rate for the invoice line.
TaxDocumentNumber	Type string Properties Filter, Group, Nillable, Sort Description The document number that tracks taxes calculated for this credit memo line.

Field	Details
	This field is available in API version 55.0 and later. This field is available when Subscription Management is enabled.
TaxEffectiveDate	Type date Properties Filter, Group, Nillable, Sort, Update Description The date used to calculate the credit memo line's TaxAmount.
TaxName	Type string Properties Filter, Group, Nillable, Sort, Update Description User-defined name for applied tax.
TaxRate	Type percent Properties Filter, Nillable, Sort, Update Description Percentage value used for calculating tax.
TotalAmount	Type currency Properties Filter, Nillable, Sort Description The total amount of the credit memo line before any applicable tax.
TotalAmountWithTax	Type currency Properties Filter, Nillable, Sort Description Total amount of tax for this credit memo line, with tax included. Sum of TotalAmount and TaxAmount.
TaxStatus	Type picklist

Field	Details
	Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Tracks whether the taxes were calculated for this credit memo line. Possible values are: - Complete - Error - None The default value is None. This field is available in API version 55.0 and later. This field is available when Subscription Management is enabled.
TaxTransactionNumber	Type string Properties Filter, Group, Nillable, Sort Description Tracks the transaction number of the tax calculated for this credit memo line. This field is available in API version 55.0 and later. This field is available when Subscription Management is enabled.
TaxTreatmentId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the tax treatment for the credit memo line. This field is a relationship field. This field is available in API version 55.0 and later. This field is available when Subscription Management is enabled. Relationship Name TaxTreatment Relationship Type Lookup Refers To TaxTreatment
Type	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of transaction for the invoice line.

Field	Details
	Possible values are: • Adjustment • Charge • Tax

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[CreditMemoLineFeed](#) on page 55

Feed tracking is available for the object.

[CreditMemoLineHistory](#) on page 63

History is available for tracked fields of the object.

Crisis

Represents a major crisis event that affects an Employee in an InternalOrganizationUnit. This object is available in API version 48.0 and later. In API version 49.0 and later, this object supports reports, criteria-based sharing rules, and history tracking, plus you can exclude individual fields from custom page layouts.

Work.com uses this object to track and describe crisis situations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access this object, you must be assigned a Workplace Command Center permission set license and the Provides access to Workplace Command Center features system permission.

Fields

Field	Details
CrisisType	Type picklist Properties Create, Filter, Group, Sort, Update Description Required. The type or category of crisis.

Field	Details
	Possible values are: • Economic Crisis • Natural Disaster • Pandemic • War
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The crisis description.
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date the crisis ended.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. The crisis record name.

Field	Details
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who currently owns this record. Default value is the user logged in to the API to perform the create operation.
StartDate	Type date Properties Create, Filter, Group, Sort, Update Description Required. The date the crisis started.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

CrisisHistory (API version 49.0)

History is available for tracked fields of the object.

CrisisOwnerSharingRule

Sharing rules are available for the object.

CrisisShare (API version 49.0)

Sharing is available for the object.

SEE ALSO:

[Workplace Command Center for Work.com Developer Guide: Extend Work.com with Custom Solutions](#)

CronJobDetail

Contains details about the associated scheduled job, such as the job's name and type. This object is available in API version 29.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
JobType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of the associated scheduled job. The following are the available job types. Use the job type value when querying for a specific job type. • 1—Data Export • 3—Dashboard Refresh • 4—Reporting Snapshot • 6—Scheduled Flow • 7—Scheduled Apex • 8—Report Run • 9—Batch Job • A—Reporting Notification
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the associated scheduled job.

Usage

Use this object to query additional information about a scheduled job, such as the job's name and type.

CronTrigger

Contains schedule information for a scheduled job. CronTrigger is similar to a cron job on UNIX systems. This object is available in API version 17.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
CronExpression	Type string Properties Filter, Group, Nillable, Sort Description The cron expression used to initiate the schedule. Syntax: <i>Seconds Minutes Hours Day_of_month Month Day_of_week Optional_year</i> See <code>schedule(jobName, cronExpression, schedulableClass)</code> in the <i>Apex Reference Guide</i>.
CronJobDetailId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the CronJobDetail record containing more details about this scheduled job. This is a relationship field. Relationship Name CronJobDetail Relationship Type Lookup Refers To CronJobDetail
EndTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the job either finished or will finish.
NextFireTime	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The next date and time the job is scheduled to run. <code>null</code> if the job is not scheduled to run again.
OwnerId	Type reference Properties Filter, Group, Nillable, Sort Description Owner of the job.
PreviousFireTime	Type dateTime Properties Filter, Nillable, Sort Description The most recent date and time the job ran. <code>null</code> if the job has not run before current local time.
StartTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the most recent iteration of the scheduled job started.
State	Type string Properties Filter, Group, Nillable, Sort Description The current state of the job. The job state is managed by the system. Possible values are: • <code>WAITING</code>—The job is waiting for execution. • <code>ACQUIRED</code>—The job has been picked up by the system and is about to execute. • <code>EXECUTING</code>—The job is executing. • <code>COMPLETE</code>—The trigger has fired and is not scheduled to fire again. • <code>ERROR</code>—The trigger definition has an error. • <code>DELETED</code>—The job has been deleted. • <code>PAUSED</code>—A job can have this state during patch and major releases. After the release has finished, the job state is automatically set to <code>WAITING</code> or another state.

Field	Details
	BLOCKED—Execution of a second instance of the job is attempted while one instance is running. This state lasts until the first job instance is completed. PAUSED_BLOCKED—A job has this state due to a release occurring. When the release has finished and no other instance of the job is running, the job's status is set to another state.
TimesTriggered	Type int Properties Filter, Group, Nillable, Sort Description The number of times this job has been triggered.
TimeZoneSidKey	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Returns the timezone ID. For example, <code>America/Los_Angeles</code>.

Usage

Use this object to query scheduled jobs in your organization.

CryptoProdCatgWalletGroup

Specifies if CryptoWalletGroup is in the allowlist or airdrop for the ProductCategory. A custom object between ProductCategory and CryptoWalletGroup adding the CryptoWalletGroup to allowlist or airdrop. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object has read, create, update, delete, modify all, and view all access.

Fields

Field	Details
CryptoWalletGroupId	Type reference Properties Create, Filter, Group, Sort Description The CryptoWalletGroup ID. This field is a relationship field. Relationship Name CryptoWalletGroup Relationship Type Lookup Refers To CryptoWalletGroup
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, and LastReferenceDate is not null, the user accessed this record or list view indirectly.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the record.
ProductCategoryId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the category. This field is a relationship field. Relationship Name ProductCategory Relationship Type Lookup Refers To ProductCategory
Status	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies if CryptoProdCatgWalletGroup is active and functional, or inactive and disabled. Possible values are: • Active • Inactive
Type	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Determines whether the list of wallets is for minting allowlist or for executing an airdrop. Possible values are: • Airdrop • Allowlist

CspTrustedSite

Represents a trusted URL. For each CspTrustedSite, you can specify Content Security Policy (CSP) directives and permissions policy directives. Each CSP directive allows Lightning components, third-party APIs, and WebSocket connections to access a resource type from the trusted URL. If the Permissions-Policy HTTP header is enabled, each permissions policy directive grants the trusted URL access to a browser feature. In API version 58.0 and earlier, CspTrustedSite included only CSP directives and was referred to as CSP Trusted Sites in Salesforce Setup. Available in API version 39.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
<code>CanAccessCamera</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this <code>CspTrustedSite</code> can access the user's camera. The default value is <code>false</code>. This field takes effect only when the <code>enablePermissionsPolicy</code> field equals <code>true</code> and the <code>grantCameraAccess</code> field equals <code>TrustedUrls</code> in the <code>SecuritySettings</code> metadata API type. This field is available in API version 59.0 and later.
<code>CanAccessMicrophone</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this <code>CspTrustedSite</code> can access the user's microphone. The default value is <code>false</code>. This field takes effect only when the <code>enablePermissionsPolicy</code> field equals <code>true</code> and the <code>grantMicrophoneAccess</code> field is <code>TrustedUrls</code> in the <code>SecuritySettings</code> metadata API type. This field is available in API version 59.0 and later.
<code>Context</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Declares the scope of the CSP directives for this trusted URL. Possible values are: • <code>All</code>—Apply the CSP directives to all supported context types. • <code>Communities</code>—Apply the CSP directives to Experience Builder sites only. • <code>FieldServiceMobileExtension</code>—Apply the CSP directives to the Field Service Mobile Extensions only.

Field	Details
	• <code>LEX</code>—Apply the CSP directives to Lightning Experience only. • <code>LightningOut</code>—Reserved for future use. Available in API version 64.0 and later • <code>VisualForce</code>—Apply the CSP directives to custom Visualforce pages only. This value is available in API version 55.0 and later. For custom Visualforce pages, content is restricted to trusted URLs only if the page's <code>cspHeader</code> attribute is set to <code>true</code>. This field is available in API version 44.0 and later.
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the trusted URL. Limit: 255 characters.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The developer name of the trusted URL. Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
EndpointUrl	Type string Properties Create, Filter, Group, Sort, Update Description The URL for this CspTrustedSite. This field must include a domain name and can include a port. For example, <code>https://example.com</code> or <code>https://example.com:8080</code>. To reduce repetition, you can use the wildcard character <code>*</code> (asterisk). For example, <code>*.example.com</code>. For a third-party API, the URL must begin with <code>https://</code>. For example, <code>https://example.com</code>. For a WebSocket connection, the URL must begin with <code>wss://</code>. For example, <code>wss://example.com</code>. Otherwise, the URL cannot be malformed. Examples of malformed URLs that fail a syntax check are <code>malformed^url.example.com</code>, and <code>https://{subdomain}.example.com</code>. To add a URL based on parameters, build the URL before you update the <code>EndpointUrl</code> field.

Field	Details
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this CspTrustedSite is active.
IsApplicableToConnectSrc	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether Lightning components, third-party APIs, and WebSocket connections can load URLs using script interfaces from this trusted URL.
IsApplicableToFontSrc	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether Lightning components, third-party APIs, and WebSocket connections can load fonts from this trusted URL.
IsApplicableToFrameSrc	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether Lightning components, third-party APIs, and WebSocket connections can load resources contained in <iframe> elements from this trusted URL.
IsApplicableToImgSrc	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether Lightning components, third-party APIs, and WebSocket connections can load images from this trusted URL.
IsApplicableToMediaSrc	Type boolean

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether Lightning components, third-party APIs, and WebSocket connections can load audio and video from this trusted URL.
IsApplicableToStyleSrc	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether Lightning components can load style sheets from this trusted URL.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language for the trusted URL.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Master label for this trusted URL.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description Namespace prefix for this trusted URL.

Usage

For each CSPTTrustedSite, at least one field starting with `grantAccess` or `isApplicableTo` must be set to `true`.

In API versions 50.0 to 58.0, if all `isApplicable` fields are `false`, the `isApplicableToImgSrc` field is set to `true`. In API version 49.0 and earlier, if all `isApplicable` fields are `false`, those fields all default to `true`.

To ensure smooth integration across Salesforce products, Salesforce includes URLs in each of the CSP directives that correspond to the `isApplicable` fields, even though those URLs aren't defined as `CspTrustedSite` components. Salesforce regularly updates those URLs based on the latest requirements.

CspViolationEventLog

CSP violation events capture details about blocked resource requests from Lightning Experience pages based on your content security policy (CSP). This object is available in API version 63.0 and later.

This event is free for all customers with a 24-hour data retention period. The CSP violation event is available in the API but not in the Event Monitoring Analytics app.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
<code>BlockedUri</code>	Type string Properties Filter, Group, Nillable, Sort Description The full string of the blocked resource. If the call to the blocked resource used a URL, <code>BLOCKED_URI</code> is the full URL. Or, for violations with a <code>DIRECTIVE</code> of <code>script-src</code> directives, <code>inline</code> or <code>eval</code>. Examples • <code>https://www.example.com/images/picture.png</code> • <code>file://host1:0002/media/video.mp4</code> • <code>inline</code>
<code>BlockedUriDomain</code>	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description If <code>BLOCKED_URI</code> is a URL, the domain for that URL. To allow resources to be loaded from the <code>BLOCKED_URI</code>, <code>BLOCKED_URI_DOMAIN</code> is the <code>endpointUrl</code> value to add or update in the CspTrustedSite Metadata API.
ColumnNumber	Type double Properties Filter, Nillable, Sort Description The column number in the document or worker script at which the violation occurred. This value is relevant only when <code>DIRECTIVE</code> is <code>script-src</code>. For those violations, use this value with <code>LINE_NUMBER</code> to identify the location of the violation. Example 27
Context	Type string Properties Filter, Group, Nillable, Sort Description The content security policy (CSP) context for the request. The CSP context controls which pages can load content from a CspTrustedSite. CSP violation events capture details about blocked resource requests from only Lightning Experience pages, this value is always <code>Lightning</code>.
Directive	Type string Properties Filter, Group, Nillable, Sort Description The CSP directive that blocked the resource request. Possible Values • <code>font-src</code> • <code>frame-src</code> • <code>img-src</code> • <code>media-src</code> • <code>style-src</code> • <code>script-src</code>

Field	Details
	For information on these directives and a full list of all CSP directives, see MDN Web Docs: Content-Security-Policy.
Disposition	Type string Properties Filter, Group, Nillable, Sort Description The CSP violation handling instruction for the user agent at the time of the violation. Possible Values • <code>enforce</code>—Enforce the policy violation. For violations with this <code>DISPOSITION</code>, the resource request was blocked. • <code>report</code>—Report the policy violation. For violations with this <code>DISPOSITION</code>, the resource request wasn't blocked, but the violation was reported.
LineNumber	Type double Properties Filter, Nillable, Sort Description The line number in the document or worker script at which the violation occurred. This value is relevant only when <code>DIRECTIVE</code> is <code>script-src</code>. For those violations, use this value with <code>COLUMN_NUMBER</code> to identify the location of the violation. Example 12
RequestIdIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code>.
ResourceSample	Type string Properties Filter, Group, Nillable, Sort Description A sample of the resource that caused the violation, usually the first 40 characters, or the empty string.

Field	Details
Source	Type string Properties Filter, Group, Nillable, Sort Description The page where this CSP violation originated. For example, if your CSP policy prevented an image from loading on a Visualforce page, <code>SOURCE</code> contains the URL of that page.
SourceFile	Type string Properties Filter, Group, Nillable, Sort Description The URL of the script in which the violation occurred. If the violation didn't occur in a script, <code>SOURCE_FILE</code> is null.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT.
UniqueIdentifier	Type string Properties Filter, Group, Nillable, Sort Description A string identifier for the CSP violation.

Usage

Only one CSP violation event log file is available at a time. When the daily incremental event log file is generated during the daily background process, the new file replaces the existing file.

If the event log file doesn't exist, either the log generation process hasn't run yet or there's no violation data to report for that 24-hour window. The event log file is generated only when at least one violation occurred for the day.

To collect CSP violation logs for multiple days, schedule a daily query of the CSP Violation event type via REST API. For example, you can configure a cron job in Unix or a scheduled task in Windows to run the query.

CurrencyType

Represents the currencies used by an organization for which the multicurrency feature is enabled.

Supported Calls

`create()`, `describeSObjects()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`

Special Access Rules

- This object is not available in single-currency organizations.
- You need the “Customize Application” permission to edit this object.
- Your client application can't delete this object.

Fields

Field	Details
ConversionRate	Type double Properties Filter Description Required. Conversion rate of this currency type against the corporate currency.
DecimalPlaces	Type int Properties Filter Description Required. For this currency, specifies the number of digits to the right of the decimal point, such as zero (0) for JPY or 2 for USD.
IsActive	Type boolean Properties Defaulted on create, Filter Description Indicates whether this currency type is active (<code>true</code>) or not (<code>false</code>). Inactive currency types do not appear in picklists in the user interface. Label is Active . This field defaults to <code>false</code> if no value is provided when updating or inserting a record.
IsCorporate	Type boolean

Field	Details
	Properties Defaulted on create, Filter Description Indicates whether this currency type is the corporate currency (<code>true</code>) or not (<code>false</code>). Label is Corporate Currency. All other currency conversion rates are applied against this corporate currency. If a currency is already defined as the corporate currency in the user interface, it can't be unset. When a non-corporate currency is set to a corporate currency, the system reconfigures all conversion rates based on the new corporate currency.
IsoCode	Type picklist Properties Filter, Restricted picklist Description Required. ISO code of the currency. Must be one of the valid alphabetic, three-letter currency ISO codes defined by the ISO 4217 standard, such as <code>USD</code>, <code>GBP</code>, or <code>JPY</code>. Must be unique within your organization. Label is Currency ISO Code.

Usage

This object is for multicurrency organizations only. Use this object to define the currencies your organization uses.

When updating an existing record, make sure to provide values for all fields to avoid undesired changes to the `CurrencyType`. For example, if a value for `IsActive` is not provided, the default (`false`) is used, which could result in a currently active `CurrencyType` becoming inactive.

SEE ALSO:

[DatedConversionRate](#)

[Overview of Salesforce Objects and Fields](#)

CustExpIntlTransfSetup

Stores information for different data sources that are processed for customer insights. This object is available in API version 65.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
DataSourceChannelName	Type string Properties Create, Filter, Group, Sort, Update Description The name of the associated communication channel, such as Web, Email, Chat, or Voice.
DataSourceChannelType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Specifies the channel type as standard or custom. Possible values are: • Custom • Standard The default value is <code>Standard</code>.
IsDataProcessingPaused	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether data processing for the channel is temporarily paused (<code>true</code>). Use this field to control channel operations without deactivating the channel. The default value is <code>false</code>.
IsEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the channel is active for processing data (<code>true</code>). The default value is <code>false</code>.
LastReferencedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description Date and time when the current user last viewed or modified this record, a record related to this record, or a list view. If this value is null, the current user has never viewed or modified a record related to this object.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Date and time when the current user last viewed or modified this record. If this value is null, the current user has never viewed or modified this record.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the Customer Experience Intelligence Transformer Setup record.
ProcessingStartDate	Type dateTime Properties Create, Filter, Sort, Update Description The date to start processing data in the specified communication channel.

CustomBrand

Represents a custom branding and color scheme. This object is available in API version 28.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

This object is available only when your org has digital experiences enabled.

Fields

Field Name	Details
ParentId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the parent entity that this branding applies to. The parent entity can be an Experience Cloud site, organization, topic, or reputation level. The branding applies to the entity that the <code>ParentId</code> references. For example, if the <code>ParentId</code> references a network ID, the branding applies to that Experience Cloud site only, and if the <code>ParentId</code> references an organization ID, the branding applies to the organization that it is accessed through, and so on. Label is <code>Branded Entity ID</code>.

Usage

Use this object along with [CustomBrandAsset](#) to apply a custom branding scheme to your Experience Cloud site. The branding scheme for the site shows in both the user interface and in the Salesforce mobile app. You must have Create and Manage Experiences to customize site branding.

You can also use this object to apply a custom branding scheme to your org when it is accessed through the Salesforce mobile app.

SEE ALSO:

[Network](#)

CustomBrandAsset

Represents a branding element in a custom branding scheme. For example, a color, logo image, header image, or footer text. A CustomBrandAsset can apply to an Experience Cloud site or to an org using the Salesforce mobile app. This object is available in API version 28.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

This object is available only when your org has digital experiences enabled.

Fields

Field Name	Details
AssetCategory	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Values include: MotifZerenaryColor—The background color for the header. Label is <code>Zerenary motif color</code>. If this CustomBrandAsset is for a network, this is the header color for the network. If it is for an org, this is the header color when users access the Salesforce mobile app. MotifPrimaryColor—The color used for the active tab. Label is <code>Primary motif color</code>. Not used for the Salesforce mobile app branding. MotifSecondaryColor—The color used for the top borders of lists and tables. Label is <code>Secondary motif color</code>. Not used for the Salesforce mobile app branding. MotifTertiaryColor—The background color for section headers on edit and detail pages. Label is <code>Tertiary motif color</code>. Not used for the Salesforce mobile app branding. MotifQuaternaryColor—If this CustomBrandAsset is for a network, this is the background color for network pages. If it is for an org, this is the background color on a splash page. Label is <code>Quaternary motif color</code>. MotifZerenaryComplementColor—Font color used with <code>zerenaryColor</code>. Label is <code>Zerenary motif colors complement color</code>. MotifPrimaryComplementColor—Font color used with <code>primaryColor</code>. Label is <code>Primary motif colors complement color</code>. Not used for the Salesforce mobile app branding. MotifTertiaryComplementColor—Font color used with <code>tertiaryColor</code>. Label is <code>Tertiary motif colors complement color</code>. Not used for the Salesforce mobile app branding.

Field Name	Details
	• MotifQuaternaryComplementColor—Font color used with <code>quaternaryColor</code>. Label is <code>Quaternary motif colors complement color</code>. Not used for the Salesforce mobile app branding. • PageHeader—An image that appears on the header of the pages. Can be an .html, .gif, .jpg, or .png file. Label is <code>Page Header</code>. Not used for the Salesforce mobile app branding. • PageFooter—An image that appears on the footer of the pages. Must be an .html file. Label is <code>Page Footer</code>. Not used for the Salesforce mobile app branding. • LoginFooterText—The text that appears in the footer of the login page. Label is <code>Footer text displayed on the login page</code>. Not used for the Salesforce mobile app branding. • LoginLogoImageId—The logo that appears on the login page for external users. In the Salesforce mobile app, this logo also appears on the Experience Cloud site splash page. Label is <code>Logo image displayed on the login page</code>. • LargeLogoImageId—Only used for the Salesforce mobile app. The logo that appears on the splash page when you start the Salesforce mobile app. Label is <code>Large logo image</code>. • SmallLogoImageId—Only used for the Salesforce mobile app. The logo that appears on the publisher in the Salesforce mobile app. Label is <code>Small logo image</code>. • StaticLogoImageUrl—The logo that appears on the login page for external users. Label is <code>Static logo image url</code>. • LoginQuaternaryColor—The background color that appears on the Experience Cloud site login page for external users. Label is <code>Login background color</code>. • LoginRightFrameUrl—The URL to the contents that appears on right side of the Experience Cloud site login page for external users. Label is <code>Login right frame url</code>. • LogoAssetId—Navigation tile menu item images. Label is <code>Logo asset image</code>. • LoginPrimaryColor—The background color of the login button. Label is <code>Login primary color</code>. • LoginBackgroundImageUrl—The path to the image URL that appears as the background on the Experience Cloud site's login page. Label is <code>Background image url</code>. • LargeLogoAssetId—Navigational topic images. Label is <code>Large logo asset image</code>.

Field Name	Details
	MediumLogoAssetId—Featured topic images. Label is Medium logo asset image.
AssetSourceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the document uploaded to the Documents folder if the value of AssetCategory is: - PageHeader - PageFooter - LoginLogoImageId - LargeLogoImageId - SmallLogoImageId ID of the content asset if the value of the AssetCategory is: - LogoAssetId - LargeLogoAssetId - MediumLogoAssetId
CustomBrandId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the associated CustomBrand . This is a relationship field. Relationship Name CustomBrand Relationship Type Lookup Refers To CustomBrand
ForeignKeyAssetId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description This field was removed in API version 41.0, and is available in earlier versions for backward compatibility only. Use <code>AssetSourceId</code> instead. ID of the document used if the value of <code>AssetCategory</code> is <code>PageHeader</code> , <code>PageFooter</code> , or <code>LoginLogoImageId</code> .
<code>TextAsset</code>	Type string Properties Create, Filter, Nillable, Sort, Update Description Text used if the <code>AssetCategory</code> is <code>LoginFooterText</code> .

Usage

Use this object to add basic branding elements—color scheme, header or footer images, login page logo, or footer text—to the branding scheme ([CustomBrand](#)) for your Experience Cloud site. You must have Create and Manage Experiences to customize site branding.

If you're using digital experiences in the Salesforce mobile app, the loading page shows the logo.

SEE ALSO:

[Network](#)

CustomFieldDisplayValue

Stores variation details for the product attribute item view. This object is available in API version 63.0 and later.

Supported Calls

```
create(), delete(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(),  
undelete(), update(), upsert()
```

Special Access Rules

CustomFieldDisplayValue is available only if the B2B or D2C Commerce license is enabled.

Fields

Field	Details
Color	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The color variation in hexadecimal value format, for example #FF0000.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The currency ISO code allowed by the organization. Possible value is: • USD—U.S. Dollar The default value is USD.
CustomFieldDisplayId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the custom field display that this variation is associated with. This field is a relationship field. Relationship Name CustomFieldDisplay Refers To CustomFieldDisplay
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the custom field display value.
PickListApiValue	Type string Properties Create, Filter, Group, idLookup, Sort, Update

Field	Details
	Description The API name of the color variation picklist value, for example, <code>red_c</code> .

Usage

This object only gets populated when display type in the CustomFieldDisplay object is ColorSwatch.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as CustomFieldDisplayValue.

CustomFieldDisplayValueChangeEvent on page 68

Change events are available for the object.

CustomFieldDisplayValueFeed on page 55

Feed tracking is available for the object.

CustomFieldDisplayValueHistory on page 63

History is available for tracked fields of the object.

CustomHelpMenuItem

Represents the items within a section of the Lightning Experience help menu that the admin added to display custom, org-specific help resources. This object is available in API version 44.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Packaging Considerations

Although you can package custom Help Menu section information, the section won't appear in the Help Menu Setup page or the Help Menu user interface of orgs where the package is installed. Instead, customers must view the data in the CustomHelpMenuItem and CustomHelpMenuSection objects and then manually add resources on the Help Menu Setup page.

Fields

Field	Details
LinkUrl	Type url
	Properties Create, Filter, Sort, Update

Field	Details
	Description Required. The URL for the resource. Specify up to 1,000 characters.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Required. The name of the resource. Specify up to 100 characters.
ParentId	Type reference Properties Create, Filter, Group, Sort Description The ID of the custom help section the item belongs to. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To CustomHelpMenuSection
SortOrder	Type int Properties Create, Filter, Group, Sort, Update Description Required. The order of the item within the custom section. Valid values are 1 through 15.

CustomHelpMenuSection

Represents a section of the Lightning Experience help menu that the admin added to display custom, org-specific help resources. This object is available in API version 44.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Packaging Considerations

Although you can package custom Help Menu section information, the section won't appear in the Help Menu Setup page or the Help Menu user interface of orgs where the package is installed. Instead, customers must view the data in the CustomHelpMenuItem and CustomHelpMenuSection objects and then manually add resources on the Help Menu Setup page.

Fields

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the custom help section in the API. This name can contain only underscores and alphanumeric characters and must be unique in your organization. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. The label corresponds to section title in the user interface. Limit: 80 characters.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Required. Language of the label. Possible values are: • da (Danish) • de (German) • en_US (English) • es (Spanish) • es_MX (Spanish (Mexico)) • fi (Finnish) • fr (French) • it (Italian) • ja (Japanese) • ko (Korean) • nl_NL (Dutch)

Field	Details
	- no (Norwegian) - pt_BR (Portuguese (Brazil)) - ru (Russian) - sv (Swedish) - th (Thai) - zh_CN (Chinese (Simplified)) - zh_TW (Chinese (Traditional))
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Required. The name of the resource. Specify up to 100 characters.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. - In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. - In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.

CustomHTTPHeader

Represents a custom HTTP header that provides context information from Salesforce such as region, org details, or the role of the person viewing the external object. This object is available in API version 43.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

As of Spring '20 and later, only authenticated internal and external users can access this object.

Fields

Field Name	Details
Description	Type textarea Properties Filter, Nillable, Sort Description A text description of the header field's purpose.
HeaderFieldName	Type string Properties Filter, Group, Sort Description Name of the header field. The name must contain at least one alphanumeric character or underscore. It can also include: ! # \$ % & ' * + - . ^ _ ` ~
HeaderFieldValue	Type string Properties Filter, Sort Description A formula that resolves to the value for the header. The values in the formula must evaluate to a string. If the formula resolves to null and an empty string, the header isn't sent.
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the custom HTTP header is available to use.
ParentId	Type reference

Field Name	Details
	Properties Filter, Group, Sort
	Description ID of the entity that the custom HTTP header is related to. This is a polymorphic relationship field.
	Relationship Name Parent
	Relationship Type Lookup
	Refers To ExternalDataSource, NamedCredential

Usage

For each OData external data source, define up to 10 HTTP headers to request data.

 **Note:** HTTP headers aren't supported on named credentials.

CustomMsgChannel

Represents a custom conversation channel and stores event-driven Messaging settings. Custom conversation channels are implemented for Bring Your Own Channel for Messaging and Bring Your Own Channel for CCaaS Messaging channels. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Access to standard objects requires Salesforce admin privileges or the Customize Application permission.

Fields

Field	Details
ChannelDefinitionId	Type reference
	Properties Create, Filter, Group, Sort, Update

Field	Details
	Description Specifies the ConversationChannelDefinition for the custom channel. This field is a relationship field. Relationship Name ChannelDefinition Refers To ConversationChannelDefinition
EventCapabilitiesInboundAcknowledgmentEnabled	Type boolean Properties Create, Filter, Update Description Indicates whether the Salesforce admin has enabled read receipts and delivery receipts for inbound messages in the Messaging settings (<code>true</code>) or whether the admin hasn't enabled these inbound acknowledgments (<code>false</code>). The default value is <code>false</code>, meaning inbound acknowledgments are disabled by default even if supported by the partner. This field is available in API version 65.0 and later. Use this field instead of <code>HasInboundReceipts</code>.
EventCapabilitiesProgressIndicatorEnabled	Type boolean Properties Create, Filter, Update Description Indicates whether the Salesforce admin has enabled AI agent progress indicators in the Messaging settings (<code>true</code>) or whether the admin hasn't enabled progress indicators (<code>false</code>). The default value is <code>false</code>, meaning progress indicators for AI agents are disabled by default even if supported by the partner. This field is available in API version 65.0 and later.
EventCapabilitiesTypingIndicatorDisabled	Type boolean Properties Create, Filter, Update Description Indicates whether the Salesforce admin has enabled typing indicators for outbound messages in the Messaging settings (<code>false</code>) or whether the admin hasn't enabled outbound typing indicators (<code>true</code>). The default value is <code>false</code>, meaning the outbound typing indicators are enabled by default. This field is available in API version 65.0 and later. Use this field instead of <code>HasTypingIndicator</code>.

Field	Details
HasInboundReceipts	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the Salesforce admin has enabled read receipts and delivery receipts for inbound messages in the Messaging settings (<code>true</code>) or whether the admin hasn't enabled these inbound acknowledgments (<code>false</code>). The default value is <code>false</code>, meaning inbound acknowledgments are disabled by default even if supported by the partner. Available in API versions 63.0 to 65.0. In API version 66.0 and later, this field is removed. Use <code>EventCapabilitiesIsInboundAcknowledgementEnabled</code> instead.
HasTypingIndicator	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the Salesforce admin has enabled typing indicators for outbound messages in the Messaging settings (<code>true</code>) or whether the admin hasn't enabled outbound typing indicators (<code>false</code>). The default value is <code>true</code>, meaning the outbound typing indicator feature is enabled by default if supported by the partner. To disable the outbound typing indicator feature, set this value to <code>false</code>. Available in API versions 63.0 to 65.0. In API version 66.0 and later, this field is removed. Use <code>EventCapabilitiesIsTypingIndicatorDisabled</code> instead.
MessagingChannelId	Type reference Properties Create, Filter, Group, Sort, Update Description Specifies the Messaging Channel ID for the custom channel. This field is unique within your organization. This field is a relationship field. Relationship Name MessagingChannel Refers To MessagingChannel

CustomNotificationType

Stores information about custom notification types. This object is available in API version 47.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
CustomNotifTypeName	Type string Properties Create, Filter, Group, idLookup, Sort, Unique, Update Description Specifies a notification type name. The notification type name is unique within your organization. The notification type name isn't namespaced, so it can't be duplicated across installed packages. Maximum number of characters: 80.
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Specifies a general description of the notification type, which is displayed with the notification type name. Maximum number of characters: 255.
Desktop	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the desktop delivery channel is enabled (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description Specifies the API name of the notification type.

Field	Details
IsSlack	Type boolean Properties Reserved for future use. Description Reserved for future use.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the language of the custom notification type. The value for this field is the language value of the org.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Specifies the notification type label.
Mobile	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the mobile delivery channel is enabled (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description Specifies the namespace of the notification type, if installed with a managed package.

CustomPermission

Represents a permission created to control access to a custom process or app, such as sending email. This object is available in API version 31.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

As of Summer '20 and later, only users who have one of these permissions can access this object:

- View Setup and Configuration
- Manage Session Permission Set Activations
- Assign Permission Sets

Fields

Field Name	Details
Description	Type textarea Properties Filter, Group, Nillable, Sort Description A description of the custom permission. Limit: 255 characters.
DeveloperName	Type string Properties Filter, Group, Sort Description The unique name of the custom permission in the API. This name can contain only underscores and alphanumeric characters and must be unique in your organization. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. The label corresponds to Name in the user interface. Limit: 80 characters.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance may slow while Salesforce generates one for each record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
IsLicensed	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field Name	Details
	Description When enabled (<code>true</code>) indicates that the appropriate Salesforce license is required before accessing the permission. This field is available in API version 50.0 and later.
IsProtected	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the custom permission is protected (<code>true</code>) or not (<code>false</code>). Protected components that have been installed in other organizations can't be linked to or referenced by components created in the subscriber organization. A developer can delete a protected component contained in a managed package in a future release of the package without worrying about failing installations. However, after a component is marked as unprotected and is released globally, the developer can't delete it. The default value is <code>false</code>. This field is available in API version 50.0 and later.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language of the custom permission. Valid values are: - Chinese (Simplified): <code>zh_CN</code> - Chinese (Traditional): <code>zh_TW</code> - Danish: <code>da</code> - Dutch: <code>nl_NL</code> - English: <code>en_US</code> - Finnish: <code>fi</code> - French: <code>fr</code> - German: <code>de</code> - Italian: <code>it</code> - Japanese: <code>ja</code> - Korean: <code>ko</code> - Norwegian: <code>no</code> - Portuguese (Brazil): <code>pt_BR</code> - Russian: <code>ru</code> - Spanish: <code>es</code>

Field Name	Details
	- Spanish (Mexico): <code>es_MX</code> Spanish (Mexico) defaults to Spanish for customer-defined translations. - Swedish: <code>sv</code> - Thai: <code>th</code> The Salesforce user interface is fully translated to Thai, but Help is in English.
MasterLabel	Type string Properties Filter, Group, Sort Description The custom permission label, which corresponds to Label in the user interface. Limit: 80 characters.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. - In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. - In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.

Usage

Use the CustomPermission object to determine users' access to custom permissions.

For example, to query all permission sets where the Button1 permission is enabled:

```
SELECT Id, DeveloperName,
(select Id, Parent.Name, Parent.Profile.Name from SetupEntityAccessItems)
FROM CustomPermission
WHERE DeveloperName = 'Button1'
```


To query all permission sets and profiles with custom permissions:

```
SELECT Assignee.Name, PermissionSet.Id,
PermissionSet.Profile.Name,
PermissionSet.isOwnedByProfile,
PermissionSet.Label
FROM PermissionSetAssignment
WHERE PermissionSetId
IN (SELECT ParentId
    FROM SetupEntityAccess
    WHERE SetupEntityType =
'CustomPermission')
```

To query for all SetupEntityAccess rows with custom permissions:

```
SELECT Id,ParentId,Parent.Name, SetupEntityId
FROM SetupEntityAccess
WHERE SetupEntityType='CustomPermission'
AND ParentId
IN (SELECT Id
    FROM PermissionSet
    WHERE isOwnedByProfile = false)
```

SEE ALSO:

- [CustomPermissionDependency](#)
- [PermissionSet](#)
- [Profile](#)
- [SetupEntityAccess](#)

CustomPermissionDependency

Represents the dependency between two custom permissions when one custom permission requires that you enable another custom permission. This object is available in API version 32.0 and later.

Supported Calls

describeLayout(), describeSObjects(), query(), retrieve()

Special Access Rules

As of Spring '20 and later, only users with View Setup and Configuration permission can access this object.

Fields

Field Name	Details
CustomPermissionId	Type reference

Field Name	Details
	Properties Filter, Group, Sort Description The ID of the custom permission that requires the permission that's specified in <code>RequiredCustomPermissionId</code>. This is a relationship field. Relationship Name CustomPermission Relationship Type Lookup Refers To CustomPermission
RequiredCustomPermissionId	Type reference Properties Filter, Group, Sort Description The ID of the custom permission that must be enabled when <code>CustomPermissionId</code> is enabled. This is a relationship field. Relationship Name RequiredCustomPermission Relationship Type Lookup Refers To CustomPermission

Usage

The following Apex class contains a method that returns the IDs of all custom permissions that are required for the given custom permission ID. To use this class, save it in your organization.

```
public class CustomPermissionUtil {
    public String[] getAllRequiredCustomPermissions(String customPermId) {
        return getAllRequiredHelper(new String[] {customPermId});
    }

    private String[] getAllRequiredHelper(String[] customPermIds) {
        CustomPermissionDependency[] requiredPerms = [SELECT RequiredCustomPermissionId
                                                    FROM CustomPermissionDependency
                                                    WHERE CustomPermissionId
                                                    IN :customPermIds];
    }
}
```

```
String[] requiredPermIds = new String[]{};
for (CustomPermissionDependency cpd : requiredPerms) {
    requiredPermIds.add(cpd.RequiredCustomPermissionId);
}
if (requiredPermIds.size() > 0) {
    customPermIds.addall(getAllRequiredHelper(requiredPermIds));
    return customPermIds;
} else {
    return customPermIds;
}
}
```

For more information about using Apex classes, see the [Apex Developer Guide](#).

SEE ALSO:
[CustomPermission](#)

Customer

Represents the customer role of an individual with respect to a particular company or organization. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
CustomerStatusType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The status of the customer account. Possible values are: - Active - Inactive
LastReferencedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Name of this customer.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who owns the record. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PartyId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Required. Represents the individual object related to this customer record. This is a relationship field.

Field	Details
	Relationship Name Party
	Relationship Type Lookup
	Refers To Individual
TotalLifeTimeValue	Type int
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The total revenue amount gained from this customer.

DandBCompany

Represents a Dun & Bradstreet® company record, which is associated with an account added from Data.com. This object is available in API version 25.0 and later.



Note: When your Data.com Prospector or Data.com Clean contract expires, Data.com features, objects, and fields will be removed from your org.

To support customers' needs around compliance and to remain a leader in trust and privacy, Salesforce removed all contact data from the Data.com service on February 1, 2021.

For more information, see [Data.com Prospector and Clean Retirement](#).



Warning: You can update fields in the DandBCompany object; however, field changes may be overwritten by Data.com Clean jobs or by using the Data.com Clean button.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Only organizations with Data.com Premium Prospector or Data.com Premium Clean can access this object.

Fields

Field Name	Details
Address	Type address Properties Filter, Nillable Description The compound form of the address. Read-only. See Address Compound Fields for details on compound address fields.
City	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The city where a company is physically located. Maximum size is 40 characters.
CompanyCurrencyIsoCode	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The code used to represent a company's local currency. This data is provided by the International Organization for Standardization (ISO) and is based on their three-letter currency codes. For example, USD is the ISO code for United States Dollar. Maximum size is 3 characters.
Country	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The country where a company is physically located. Maximum size is 40 characters.
CountryAccessCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The required code for international calls. Maximum size is 4 characters.

Field Name	Details
CurrencyCode	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The currency in which the company's sales volume is expressed. The full list of values can be found at the Optimizer Resources page maintained by Dun & Bradstreet. Maximum size is 4 characters.
Description	Type textarea Properties Create, Nillable, Update Description A brief description of the company, which may include information about its history, its products and services, and its influence on a particular industry. Maximum size is 32000 characters.
DomesticUltimateBusinessName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The primary name of the Domestic Ultimate, which is the highest ranking subsidiary, specified by country, within an organization's corporate structure. Maximum size is 255 characters.
DomesticUltimateDunsNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The D-U-N-S Number for the Domestic Ultimate, which is the highest ranking subsidiary, specified by country, within an organization's corporate structure. Maximum size is 9 characters.
DunsNumber	Type string Properties Create, Filter, Group, Sort, Update

Field Name	Details
	Description The Data Universal Numbering System (D-U-N-S) number is a unique, nine-digit number assigned to every business location in the Dun & Bradstreet database that has a unique, separate, and distinct operation. D-U-N-S numbers are used by industries and organizations around the world as a global standard for business identification and tracking. Maximum size is 9 characters.
EmployeeQuantityGrowthRate	Type double Properties Create, Filter, Nillable, Sort, Update Description The yearly growth rate of the number of employees in a company expressed as a decimal percentage. The data includes the total employee growth rate for the past two years.
EmployeesHere	Type double Properties Create, Filter, Nillable, Sort, Update Description The number of employees at a specified location, such as a branch location. Maximum size is 15 characters.
EmployeesHereReliability	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The reliability of the <code>EmployeesHere</code> figure. Available values include: 0—Actual number 1—Low 2—Estimated (for all records) 3—Modeled (for non-US records)
EmployeesTotal	Type double Properties Create, Filter, Nillable, Sort, Update Description The total number of employees in the company, including all subsidiary and branch locations. This data is only available on records that have a value of

Field Name	Details
	<i>Headquarters/Parent</i> in the <code>LocationStatus</code> field. Maximum size is 15 characters.
<code>EmployeesTotalReliability</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The reliability of the <code>EmployeesTotal</code> figure. Available values include: 0—Actual number 1—Low 2—Estimated (for all records) 3—Modeled (for non-US records) A blank value indicates this data is unavailable.
<code>FamilyMembers</code>	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The total number of family members, worldwide, within an organization, including the Global Ultimate, its subsidiaries (if any), and its branches (if any). Maximum size is 5 characters.
<code>Fax</code>	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description The company's facsimile number.
<code>FifthNaics</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An additional NAICS code used to further classify an organization by industry. Maximum size is 6 characters.
<code>FifthNaicsDesc</code>	Type string

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of an organization's line of business, based on the corresponding NAICS code. Maximum size is 120 characters.
FifthSic	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An additional SIC code used to further classify an organization by industry. Maximum size is 8 characters.
FifthSic8	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An additional SIC code used to further classify an organization by industry. Maximum size is 8 characters.
FifthSic8Desc	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of an organization's line of business, based on the corresponding SIC code. Maximum size is 80 characters.
FifthSicDesc	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of an organization's line of business, based on the corresponding SIC code. Maximum size is 80 characters.
FipsMsaCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The Federal Information Processing Standards (FIPS) and the Metropolitan Statistical Area (MSA) codes identify the organization's location. The MSA codes are defined by the US Office of Management and Budget. Maximum size is 5 characters.
FipsMsaDesc	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of an organization's FIPS MSA code. Maximum size is 255 characters.
FortuneRank	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The numeric value of the company's Fortune 1000 ranking. A null or blank value means that the company isn't ranked as a Fortune 1000 company.
FourthNaics	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An additional NAICS code used to further classify an organization by industry. Maximum size is 6 characters.
FourthNaicsDesc	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of an organization's line of business, based on the corresponding NAICS code. Maximum size is 120 characters.
FourthSic	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description An additional SIC code used to further classify an organization by industry. Maximum size is 8 characters.
FourthSic8	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An additional SIC code used to further classify an organization by industry. Maximum size is 8 characters.
FourthSic8Desc	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of an organization's line of business, based on the corresponding SIC code. Maximum size is 80 characters.
FourthSicDesc	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of an organization's line of business, based on the corresponding SIC code. Maximum size is 80 characters.
GeoCodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The level of accuracy of a location's geographical coordinates compared with its physical address. Available values include: • <i>A – Non-US rooftop accuracy</i> • <i>B – Block level</i> • <i>C – Places the address in the correct city</i> • <i>D – Rooftop level</i> • <i>I – Street intersection</i> • <i>M – Mailing address level</i>

Field Name	Details
	• N – <i>Not matched</i> • P – <i>PO BOX location</i> • S – <i>Street level</i> • T – <i>Census tract level</i> • Z – <i>ZIP code level</i> • 0 (zero) – <i>Geocode could not be assigned</i>
GlobalUltimateBusinessName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The primary name of the Global Ultimate, which is the highest entity within an organization's corporate structure and may oversee branches and subsidiaries. Maximum size is 255 characters.
GlobalUltimateDunsNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The D-U-N-S Number of the Global Ultimate, which is the highest entity within an organization's corporate structure and may oversee branches and subsidiaries. Maximum size is 9 characters.
GlobalUltimateTotalEmployees	Type double Properties Create, Filter, Nillable, Sort, Update Description The total number of employees at the Global Ultimate, which is the highest entity within an organization's corporate structure and may oversee branches and subsidiaries. Maximum size is 15 characters.
ImportExportAgent	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Identifies whether a business imports goods or services, exports goods or services, and/or is an agent for goods. Available values include: • A—Importer/exporter/agent

Field Name	Details
	• B—Importer/exporter • C—Importer • D—Importer/agent • E—Exporter/agent • F—Agent (keeps no inventory and does not take title goods) • G—None or data not available • H—Exporter
IncludedInSnP500	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A true or false value. If <code>true</code>, the company is listed in the S&P 500 Index. If <code>false</code>, the company isn't listed in the S&P 500 Index.
Latitude	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Used with longitude to specify a precise location, which is then used to assess the Geocode Accuracy. Maximum size is 11 characters.
LegalStatus	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Identifies the legal structure of an organization.
LocationStatus	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Identifies the organizational status of a company. Available values are <i>Single location</i>, <i>Headquarters/Parent</i>, and <i>Branch</i>. Available values include: • 0—Single location (no other entities report to the business) • 1—Headquarters/parent (branches and/or subsidiaries report to the business)

Field Name	Details
	2—Branch (secondary location to a headquarters location)
Longitude	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Used with latitude to specify a precise location, which is then used to assess the Geocode Accuracy. Maximum size is 11 characters.
MailingAddress	Type address Properties Filter, Nillable Description The compound form of the mailing address. Read-only. See Address Compound Fields for details on compound address fields.
MailingCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The city where a company has its mail delivered. Maximum size is 40 characters.
MailingCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The country where a company has its mail delivered. Maximum size is 40 characters.
MailingPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The postal code that a company uses on its mailing address. Maximum size is 20 characters.

Field Name	Details
MailingState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The state where a company has its mail delivered. Maximum size is 20 characters.
MailingStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The street address where a company has its mail delivered. Maximum size is 255 characters.
MarketingPreScreen	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The probability that a company will pay with a significant delay compared to the agreed terms. The risk level is based on the standard Commercial Credit Score, and ranges from low risk to high risk. Available values include: • L—<i>Low risk of delinquency</i> • M—<i>Moderate risk of delinquency</i> • H—<i>High risk of delinquency</i>  Important: Use this information for marketing pre-screening purposes only.
MarketingSegmentationCluster	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Twenty-two distinct, mutually exclusive profiles, created as a result of cluster analysis of Dun & Bradstreet data for US organizations.
MinorityOwned	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field Name	Details
	Description Indicates whether an organization is owned or controlled by a member of a minority group. Available values include: • Y—Minority owned • N—Not minority owned
Name	Type string Properties Create, Filter, Group, Sort, Update Description The primary or registered name of a company. Maximum size is 255 characters.
NationalId	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The identification number used in some countries for business registration and tax collection. Maximum size is 255 characters.
NationalIdType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description A code value that identifies the type of national identification number used. The full list of resources can be found at the Optimizer Resources page maintained by Dun & Bradstreet. Maximum size is 5 characters.
OutOfBusiness	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates whether the company at the specified address has discontinued operations. Available values include: • Y—Out of business • N—Not out of business
OwnOrRent	Type picklist

Field Name	Details
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates whether a company owns or rents the building it occupies. Available values include: • 0—Unknown or not applicable • 1—Owns • 2—Rents
ParentOrHqBusinessName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The primary name of the parent or headquarters company. Maximum size is 255 characters.
ParentOrHqDunsNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The D-U-N-S Number for the parent or headquarters. Maximum size is 9 characters.
Phone	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description A company's primary telephone number.
PostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The postal code that corresponds to a company's physical location. Maximum size is 20 characters.
PremisesMeasure	Type int

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description A numeric value for the measurement of the premises.
PremisesMeasureReliability	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A descriptive accuracy of the measurement such as actual, estimated, or modeled.
PremisesMeasureUnit	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A descriptive measurement unit such as acres, square meters, or square feet.
PrimaryNaics	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The six-digit North American Industry Classification System (NAICS) code is the standard used by business and government to classify business establishments according to their economic activity for the purpose of collecting, analyzing, and publishing statistical data related to the US business economy. The full list of values can be found at the Optimizer Resources page maintained by Dun & Bradstreet. Maximum size is 6 characters.
PrimaryNaicsDesc	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of an organization's line of business, based on its NAICS code. Maximum size is 120 characters.
PrimarySic	Type string

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The four-digit Standard Industrial Classification (SIC) code is used to categorize business establishments by industry. The full list of values can be found at the Optimizer Resources page maintained by Dun & Bradstreet. Maximum size is 4 characters.
PrimarySic8	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The eight-digit Standard Industrial Classification (SIC) code is used to categorize business establishments by industry. The full list of values can be found at the Optimizer Resources page maintained by Dun & Bradstreet. Maximum size is 8 characters.
PrimarySic8Desc	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of an organization's line of business, based on its SIC code. The full list of values can be found at the Optimizer Resources page maintained by Dun & Bradstreet. Maximum size is 80 characters.
PrimarySicDesc	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of an organization's line of business, based on its SIC code. Maximum size is 80 characters.
PriorYearEmployees	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The total number of employees for the prior year.

Field Name	Details
PriorYearRevenue	Type double Properties Create, Filter, Nillable, Sort, Update Description The annual revenue for the prior year.
PublicIndicator	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates whether ownership of the company is public or private. Available values include: • Y—Public • N—Private
SalesTurnoverGrowthRate	Type double Properties Create, Filter, Nillable, Sort, Update Description The increase in annual revenue from the previous value for an equivalent period expressed as a decimal percentage.
SalesVolume	Type double Properties Create, Filter, Nillable, Sort, Update Description The total annual sales revenue in the headquarters' local currency. Dun & Bradstreet tracks revenue data for publicly traded companies, Global Ultimates, Domestic Ultimates, and some headquarters.
SalesVolumeReliability	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The reliability of the <code>SalesVolume</code> figure. Available values include: • 0—Actual number

Field Name	Details
	• 1—Low • 2—Estimated (for all records) • 3—Modeled (for non-US records)
SecondNaics	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An additional NAICS code used to further classify an organization by industry. Maximum size is 6 characters.
SecondNaicsDesc	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of an organization's line of business, based on the corresponding NAICS code. Maximum size is 120 characters.
SecondSic	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An additional SIC code used to further classify an organization by industry. Maximum size is 8 characters.
SecondSic8	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An additional SIC code used to further classify an organization by industry. Maximum size is 8 characters.
SecondSic8Desc	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description A brief description of an organization's line of business, based on the corresponding SIC code. Maximum size is 80 characters.
SecondSicDesc	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of an organization's line of business, based on the corresponding SIC code. Maximum size is 80 characters.
SixthNaics	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An additional NAICS code used to further classify an organization by industry. Maximum size is 6 characters.
SixthNaicsDesc	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of an organization's line of business, based on the corresponding NAICS code. Maximum size is 120 characters.
SixthSic	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An additional SIC code used to further classify an organization by industry. Maximum size is 8 characters.
SixthSic8	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description An additional SIC code used to further classify an organization by industry. Maximum size is 8 characters.
SixthSic8Desc	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of an organization's line of business, based on the corresponding SIC code. Maximum size is 80 characters.
SixthSicDesc	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of an organization's line of business, based on the corresponding SIC code. Maximum size is 80 characters.
SmallBusiness	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates whether the company is designated a small business as defined by the Small Business Administration of the US government. Available values include: • Y—Small business site • N—Not small business site
State	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The state where a company is physically located. Maximum size is 20 characters.
StockExchange	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The corresponding exchange for a company's stock symbol. For example: NASDAQ or NYSE. Maximum size is 16 characters.
StockSymbol	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The abbreviation used to identify publicly traded shares of a particular stock. Maximum size is 6 characters.
Street	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The street address where a company is physically located. Maximum size is 255 characters.
Subsidiary	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates whether a company is more than 50 percent owned by another organization. Available values include: 0—Not subsidiary of another organization 3—Subsidiary of another organization
ThirdNaics	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An additional NAICS code used to further classify an organization by industry. Maximum size is 6 characters.
ThirdNaicsDesc	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description A brief description of an organization's line of business, based on the corresponding NAICS code. Maximum size is 120 characters.
ThirdSic	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An additional SIC code used to further classify an organization by industry. Maximum size is 8 characters.
ThirdSic8	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An additional SIC code used to further classify an organization by industry. Maximum size is 8 characters.
ThirdSic8Desc	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of an organization's line of business, based on the corresponding SIC code. Maximum size is 80 characters.
ThirdSicDesc	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of an organization's line of business, based on the corresponding SIC code. Maximum size is 80 characters.
TradeStyle1	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description A name, different from its legal name, that an organization may use for conducting business. Similar to “Doing business as” or “DBA”. Maximum size is 255 characters.
TradeStyle2	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An additional tradestyle used by the organization. Maximum size is 255 characters.
TradeStyle3	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An additional tradestyle used by the organization. Maximum size is 255 characters.
TradeStyle4	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An additional tradestyle used by the organization. Maximum size is 255 characters.
TradeStyle5	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An additional tradestyle used by the organization. Maximum size is 255 characters.
URL	Type url Properties Create, Filter, Group, Nillable, Sort, Update Description An organization’s primary website address. Maximum size is 104 characters.
UsTaxId	Type string

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The identification number for the company used by the Internal Revenue Service (IRS) in the administration of tax laws. Also referred to as Federal Taxpayer Identification Number. Maximum size is 9 characters.
WomenOwned	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates whether a company is more than 50 percent owned or controlled by a woman. Available values include: • Y—Owned by a woman • N—Not owned by a woman, or unknown
YearStarted	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The year the company was established or the year when current ownership or management assumed control of the company. Maximum size is 4 characters.

Usage

Use this object to manage D&B Company records in your organization.

Dashboard

Represents a dashboard, which shows data from custom reports as visual components. Access is read-only. This object is available in API version 20.0 and later.

Supported Calls

`describeSObjects()`, `describeLayout()`, `query()`, `retrieve()`, `search()`

Fields

Field	Details
BackgroundDirection	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Returns the direction of the background fade. Available values are: • Top to Bottom • Left to Right • Diagonal (default value) Label is Background Fade Direction.
BackgroundEnd	Type int Properties Filter, Group, Sort Description Returns the ending fade color in hexadecimal. Label is Ending Color.
BackgroundStart	Type int Properties Filter, Group, Sort Description Returns the starting fade color in hexadecimal. Label is Starting Color.
ChartTheme	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Returns the background theme used for charts. Possible values are: • dark—Dark Background • light—Light Background
ColorPalette	Type picklist

Field	Details
	Properties Filter, Group, Nillable, Restricted picklist, Sort Description Returns the color palette used for the dashboard. Possible values are: • <code>Default</code>—Default Palette • <code>accessible</code>—Mineral(Accessible) Palette • <code>bluegrass</code>—Bluegrass Palette • <code>colorSafe</code>—Color Safe Palette • <code>dusk</code>—Dusk Palette • <code>earth</code>—Lake Palette • <code>fire</code>—Fire Palette • <code>gray</code>—Gray Palette • <code>heat</code>—Heat Palette • <code>justice</code>—Wildflowers Palette • <code>nightfall</code>—Nightfall Palette • <code>pond</code>—Pond Palette • <code>sunrise</code>—Sunrise Palette • <code>tropic</code>—Ocean Palette • <code>unity</code>—Aurora Palette • <code>water</code>—Water Palette • <code>watermelon</code>—Watermelon Palette
DashboardResultRefreshedDate	Type string Properties Nillable Description Returns the date on which the dashboard results were last refreshed.
DashboardResultRunningUser	Type string Properties Nillable Description The user whose security settings were used to generate the dashboard results.
Description	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description Returns the description of the dashboard. Limit: 255 characters.
DeveloperName	Type string Properties Filter, Group, Sort Description Required. The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Label is <code>Dashboard Unique Name</code>.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance may slow while Salesforce generates one for each record.
FolderId	Type reference Properties Filter, Group, Sort Description Required. Returns the ID of the Folder that contains the dashboard. See <code>Folder</code>. This is a relationship field. Relationship Name Folder Relationship Type Lookup Refers To Folder, User
FolderName	Type string Properties Filter, Nillable, Sort

Field	Details
	Description Name of the folder that contains the dashboard. Available in API version 35.0 and later.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
LastReferencedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type datetime Properties Filter, Nillable, Sort, Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
LeftSize	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Returns the size of the left column of the dashboard. Available values are: • Narrow • Medium • Wide

Field	Details
MiddleSize	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Returns the size of the middle column of the dashboard. Available values are: • Narrow • Medium • Wide
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, NamespacePrefix is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, NamespacePrefix is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
RightSize	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Returns the size of the right column in the dashboard. Available values are: • Narrow • Medium • Wide

Field	Details
RunningUserId	Type reference Properties Filter, Group, Sort Description Returns the ID of the running user specified for the dashboard. If the dashboard was created in Lightning Experience and is configured to run as the viewing user, it returns the user ID of the dashboard creator. If the dashboard was created in Salesforce Classic and is configured to run as the logged-in user, returns the user ID of the last specified running user. This is a relationship field. Relationship Name RunningUser Relationship Type Lookup Refers To User
TextColor	Type int Properties Filter, Group, Sort Description Returns the body text color in hexadecimal. Label is <code>Text Color</code>.
Title	Type string Properties Filter, Group, idLookup, Sort Description Returns the title of the dashboard. Limit: 80 characters.
TitleColor	Type int Properties Filter, Group, Sort Description Returns the title text color in hexadecimal. Label is <code>Title Color</code>.
TitleSize	Type int

Field	Details
	Properties Filter, Group, Sort Description Returns the title font size in points. Label is <code>Title Size</code> .
Type	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Returns the dashboard type. Available values are: • <code>SpecifiedUser</code>—The dashboard displays data according to the access level of one specific running user. • <code>LoggedInUser</code>—The dashboard displays data according to the access level of the logged-in user. • <code>MyTeamUser</code>—The dashboard displays data according to the access level of the logged-in user, and managers can view dashboards from the point of view of users beneath them in the role hierarchy.

Supported Query Scopes

Use these scopes to help specify the data that your SOQL query returns.

allPrivate

Records saved in all users' private folders.

Requires the user permission "Manage All Private Reports and Dashboards" and [Enhanced Analytics Folder Sharing](#). If your organization was created after the Summer '13 release, you already have Enhanced Analytics Folder Sharing. Available in API version 36.0 and later.

created

Records created by the user running the query.

everything

All records except records saved in other users' private folders.

mine

Records saved in the private folder of the user running the query.

Usage

Provides read-only access to the current values in the dashboard fields.

Example: Dashboards in an Inactive User’s Private Folder

This SOQL query returns dashboards saved in a specific user’s private folder.

```
SELECT Id FROM Dashboard USING SCOPE allPrivate WHERE CreatedById = '005A0000000Bc2deFG'
```

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

DashboardFeed

Feed tracking is available for the object.

SEE ALSO:

- [DashboardTag](#)
- [Report](#)

DashboardComponent

Represents a dashboard component, which can be a chart, metric, table, or gauge on a dashboard. Access is read-only. This object is available in API version 21.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
CustomReportId	Type reference Properties Filter, Group, Nillable, Sort Description Requires the user permission "Manage All Private Reports and Dashboards." The ID of the report that provides data for the dashboard component. See Report.
DashboardId	Type reference Properties Filter, Group, Sort Description The ID of the dashboard that contains the dashboard component. See Dashboard. This is a relationship field.

Field	Details
	Relationship Name Dashboard
	Relationship Type Lookup
	Refers To Dashboard
Name	Type string
	Properties Filter, Group, Nillable, Sort
	Description The name of the dashboard component.

Usage

Provides read only access to the current values in dashboard component fields.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[DashboardComponentFeed](#)

Feed tracking is available for the object.

DashboardTag

Associates a word or short phrase with a Dashboard. This object is available in API version 20.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
ItemId	Type reference
	Properties Create, Filter

Field Name	Details
	Description ID of the tagged item.
Name	Type string Properties Create, Filter Description Name of the tag. If this value does not already exist, a new TagDefinition is created and becomes the parent of this Tag object. Otherwise, a TagDefinition with the same name becomes the parent of this Tag object. Parent relationships are created automatically.
TagDefinitionId	Type reference Properties Filter Description ID of the parent TagDefinition object that owns the tag.
Type	Type picklist Properties Create, Filter, Restricted picklist Description Defines the visibility of a tag. Valid values: • <code>Public</code>—The tag can be viewed and manipulated by all users in an organization. • <code>Personal</code>—The tag can be viewed or manipulated only by a user with a matching <code>OwnerId</code>.

Usage

DashboardTag stores the relationship between its parent TagDefinition and the Dashboard being tagged. Tag objects act as metadata, allowing users to describe and organize their data.

When a tag is deleted, its parent TagDefinition will also be deleted if the name is not being used; otherwise, the parent remains. Deleting a TagDefinition sends it to the Recycle Bin, along with any associated tag entries.

SEE ALSO:

[Dashboard](#)

DataAssessmentFieldMetric

Represents summary statistics for matched, blank, and differing fields in account records of an org compared to records in Data.com. This object is available in API version 37.0 and later.



Note: When your Data.com Prospector or Data.com Clean contract expires, Data.com features, objects, and fields will be removed from your org.

To support customers' needs around compliance and to remain a leader in trust and privacy, Salesforce removed all contact data from the Data.com service on February 1, 2021.

For more information, see [Data.com Prospector and Clean Retirement](#).

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Child Relationships

DataAssessmentFieldMetric is a child object of [DataAssessmentMetric](#) object.

Fields

Field Name	Details
DataAssessmentMetricId	Type reference Properties Filter, Group, Sort Description A unique number that identifies the parent DataAssessmentMetric record. This is a relationship field. Relationship Name DataAssessmentMetric Relationship Type Lookup Refers To DataAssessmentMetric
FieldName	Type string Properties Filter, Group, Nillable, Sort Description The name of the assessed field.

Field Name	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An optional field used to name your record.
NumMatchedBlanks	Type int Properties Filter, Group, Nillable, Sort Description The number of matched records that contain blank fields.
NumMatchedDifferent	Type int Properties Filter, Group, Nillable, Sort Description The number of matched records that have a different value for this field.
NumMatchedInSync	Type int Properties Filter, Group, Nillable, Sort Description The number of matched records that have the same value for this field.
NumUnmatchedBlanks	Type int Properties Filter, Group, Nillable, Sort Description The number of unmatched records that contain blank fields.

DataAssessmentMetric

Represents a summary of statistics for fields matched and unmatched in your account records with Data.com account records. This object is available in API version 37.0 and later.



Note: When your Data.com Prospector or Data.com Clean contract expires, Data.com features, objects, and fields will be removed from your org.

To support customers' needs around compliance and to remain a leader in trust and privacy, Salesforce removed all contact data from the Data.com service on February 1, 2021.

For more information, see [Data.com Prospector and Clean Retirement](#).

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field Name	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An optional field used to name your record.
NumDuplicates	Type int Properties Filter, Group, Nillable, Sort Description The number of duplicate records.
NumMatched	Type int Properties Filter, Group, Nillable, Sort Description The number of matched records.
NumMatchedDifferent	Type int Properties Filter, Group, Nillable, Sort Description The number of records in your org matched with a Data.com record that have different fields.

Field Name	Details
NumProcessed	Type int Properties Filter, Group, Nillable, Sort Description The number of records processed in the data assessment.
NumTotal	Type int Properties Filter, Group, Nillable, Sort Description The number of records available for data assessment processing.
NumUnmatched	Type int Properties Filter, Group, Nillable, Sort Description The number of records not matched.

DataAssessmentValueMetric

Summarizes the number of fields matched for your account records with Data.com account records. This object is available in API version 37.0 and later.



Note: When your Data.com Prospector or Data.com Clean contract expires, Data.com features, objects, and fields will be removed from your org.

To support customers' needs around compliance and to remain a leader in trust and privacy, Salesforce removed all contact data from the Data.com service on February 1, 2021.

For more information, see [Data.com Prospector and Clean Retirement](#).

Supported Calls

`describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Child Relationships

DataAssessmentValueMetric is a child of [DataAssessementFieldMetric](#).

Fields

Field Name	Details
DataAssessmentFieldMetricId	Type reference Properties Filter, Group, Sort Description A unique number that identifies the parent DataAssesementFieldMetric record. This is a relationship field. Relationship Name DataAssessmentFieldMetric Relationship Type Lookup Refers To DataAssessmentFieldMetric
FieldValue	Type string Properties Filter, Group, Nillable, Sort Description The value in the matched field.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An optional field used to name your record.
ValueCount	Type int Properties Filter, Group, Nillable, Sort Description The number of times this value appears in this field.

DatabaseSaveEventLog

Database Save events track when records are created,updated, or deleted This object is available in API version 64.0 and later.

 **Note:** This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
<code>BotIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The ID of the bot.
<code>BotSessionIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The bot session ID.
<code>DmlType</code>	Type string Properties Filter, Group, Nillable, Sort Description The type of DML operation.
<code>FirstObjectIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description Only the first object ID is logged upon an update. During record updates, the ID of that specific row is logged. When multiple rows are updated, only a single ID is logged.

Field	Details
KeyPrefix	Type string Properties Filter, Group, Nillable, Sort Description The key prefix of the entity type that was saved
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. The session starts with a login event and ends with either a logout event or the user session expiring. For example, 1UqjLPQTWRdvRG4.
PlannerIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the agent planner.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same RequestIdentifier.
RowCount	Type int Properties Filter, Group, Nillable, Sort Description Total number of records in the result set.
SampleFactor	Type double Properties Filter, Nillable, Sort

Field	Details
	Description Rate at which entities are logged. If the sample factor is 1 that means every entity saved was logged. If it is 100 that means that 1/100 logs.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API.

DatacloudCompany

Represents the fields for Data.com company records. This object is available in API version 30.0 or later.



Note: When your Data.com Prospector or Data.com Clean contract expires, Data.com features, objects, and fields are removed from your org.

To support customers' needs around compliance and to remain a leader in trust and privacy, Salesforce removed all contact data from the Data.com service on February 1, 2021.

For more information, see [Data.com Prospector and Clean Retirement](#).

Supported Calls

`describeLayout()`, `describeSObjects()`, `query()`

Fields

Field Name	Details
ActiveContacts	Type int Properties Nillable Description The number of active contacts that are associated with a company.
AnnualRevenue	Type currency Properties Filter, Nillable Description The amount of money that the company makes in 1 year. Annual revenue is measured in US dollars.
City	Type string Properties Filter, Nillable, Sort Description The name of the city where the company is located.
CompanyId	Type string Properties Filter, Nillable Description A unique numerical identifier for the company and theData.com identifier for a company.
Country	Type string Properties Filter, Nillable, Sort Description A string that represents the standard abbreviation for the country where the company is located.

Field Name	Details
CountryCode	Type picklist Properties Filter, Group, Nillable, Restricted picklist Description A standardized name for countries of the world.
Description	Type string Properties Nillable Description A brief synopsis of the company that provides a general overview of the company and what it does.
DunsNumber	Type string Properties Filter, Nillable Description A randomly generated nine-digit number that's assigned by Dun & Bradstreet (D&B) to identify unique business establishments.
EmployeeQuantityGrowthRate	Type double Properties Nillable Description The yearly growth rate of the number of employees in a company expressed as a decimal percentage. The data includes the total employee growth rate for the past two years.
ExternalId	Type string Properties Filter, Nillable, Sort Description A unique numerical identifier for the company. The ExternalId is a system-generated number.

Field Name	Details
Fax	Type phone Properties Nillable Description The telephone number that's used to send and receive faxes.
FortuneRank	Type int Properties Defaulted on create, Group, Nillable Description The numeric value of the company's Fortune 1000 ranking. A null or blank value means that the company isn't ranked as a Fortune 1000 company.
FullAddress	Type string Properties Group, Nillable Description The complete address of a company, including Street, City, State, and Zip.
IncludedInSnP500	Type string Properties Group, Nillable Description A true or false value. If <code>true</code>, the company is listed in the S&P 500 Index. If <code>false</code>, the company isn't listed in the S&P 500 Index.
Industry	Type string Properties Nillable Description A description of the type of industry such as Telecommunications, Agriculture, or Electronics.
IsInCrm	Type boolean

Field Name	Details
	Properties Defaulted on create, Group Description Whether the record is in Salesforce (true) or not (false).
IsInactive	Type boolean Properties Defaulted on create, Filter Description A true or false response. True, the company record is not active. False, the company record is active.
IsOwned	Type boolean Properties Defaulted on create Description A true or false value. True, your organization owns the record. False, your organization doesn't own the record.
NaicsCode	Type string Properties Filter, Nillable Description A value that represents the North American Industry Classification System (NAICS) code. NAICS was created to provide details about a business's service orientation. The code descriptions are focused on what a business does.
NaicsDesc	Type string Properties Nillable Description A description of the NAICS classification.
Name	Type string

Field Name	Details
	Properties Filter, Nillable, Sort Description The company's name.
NumberOfEmployees	Type int Properties Filter, Nillable Description The number of employees working for the company.
Ownership	Type string Properties Filter, Nillable Description The type of ownership of the company: • Public • Private • Government • Other
Phone	Type phone Properties Nillable Description A numeric string containing the primary telephone number for the company.
PremisesMeasure	Type int Properties Group, Nillable Description A numeric value for the measurement of the premises.
PremisesMeasureReliability	Type string

Field Name	Details
	Properties Group, Nillable Description A descriptive accuracy of the measurement such as actual, estimated, or modeled.
PremisesMeasureUnit	Type string Properties Group, Nillable Description A descriptive measurement unit such as acres, square meters, or square feet.
PriorYearEmployees	Type int Properties Group, Nillable Description The total number of employees for the prior year.
PriorYearRevenue	Type double Properties Nillable Description The annual revenue for the prior year.
SalesTurnoverGrowthRate	Type double Properties Nillable Description The increase in annual revenue from the previous value for an equivalent period expressed as a decimal percentage.
Sic	Type string Properties Filter, Nillable

Field Name	Details
	Description A numeric value that represents the Standard Industrial Codes (SIC). SIC is a numbering convention that indicates what type of service a business provides. It is a four-digit value.
SicCodeDesc	Type string Properties Group, Nillable Description The SIC numeric code and description for a company.
SicDesc	Type string Properties Nillable Description A description of the SIC classification.
Site	Type picklist Properties Filter, Group, Nillable, Restricted picklist Description An organizational status of the company. • Branch: a secondary location to a headquarter location • Headquarter: a parent company with branches or subsidiaries • Single Location: a single business with no subsidiaries or branches
State	Type string Properties Filter, Nillable, Sort Description The two-letter standard abbreviation for a state.
StateCode	Type picklist Properties Filter, Group, Nillable, Restricted picklist

Field Name	Details
	Description A standard two-letter abbreviation for states and territories of the United States. The state where the company is located. The abbreviation can also be a province or other equivalent to a state, depending on the country where the company is located.
Street	Type string Properties Nillable Description A postal address for the company.
TickerSymbol	Type string Properties Nillable Description The symbol that uniquely identifies companies that are traded on public stock exchanges.
TradeStyle	Type string Properties Nillable Description A legal name under which a company conducts business.
UpdatedDate	Type dateTime Properties Nillable, Sort Description The last date and time when the information for this company was updated.
Website	Type url Properties Nillable

Field Name	Details
	Description The standard URL for the company's home page.
YearStarted	Type string Properties Nillable Description The year when the company was founded.
Zip	Type string Properties Filter, Nillable Description A numeric postal code that's designated for the address.

Usage

Use the DatacloudCompany object to search the Data.com database for companies with the specific criteria that you enter. Use this object to find company records that you are interested in purchasing for your organization. Data.com APIs use the term "company," which is similar to Salesforce term "accounts."



Important: DatacloudCompany can't be used in Apex test methods, because an external web service call is required to access it. These calls are not allowed in Apex test methods.

DatacloudContact

The fields and properties for Data.com contact records. This object is available in API version 30.0 or later.



Note: When your Data.com Prospector or Data.com Clean contract expires, Data.com features, objects, and fields are removed from your org.

To support customers' needs around compliance and to remain a leader in trust and privacy, Salesforce removed all contact data from the Data.com service on February 1, 2021.

For more information, see [Data.com Prospector and Clean Retirement](#).

Supported Calls

`describeSObjects()`, `query()`

Fields

Field Name	Details
City	Type string Properties Filter, Nillable, Sort Description The city where the company is located.
CompanyId	Type string Properties Filter, Nillable Description The unique numerical identifier for the company and the Data.com company identification number or Data.com Key.
CompanyName	Type string Properties Filter, Group, Sort Description The name of the company.
ContactId	Type string Properties Filter, Nillable Description The unique numeric identifier for this contact.
Country	Type string Properties Filter, Nillable, Sort Description The standard abbreviation or name for the country where the company is located.  Note: You can enter a comma-separated list of countries; however, for a country that uses a comma in its name, leave out the comma. For example, enter "Taiwan, ROC" as <code>Taiwan ROC</code>.

Field Name	Details
Department	Type picklist Properties Filter, Group, Restricted picklist Description The department in the company that the contact is affiliated with. The values of this field are fixed enumerated values. • Engineering • Finance • Human Resources • IT • Marketing • Operations • Other • Sales • Support
Email	Type email Properties Filter, Nillable Description A business email address for the contact.
ExternalId	Type string Properties Filter, Nillable, Sort Description A unique system-generated numerical identifier for the contact.
FirstName	Type string Properties Filter, Nillable Description The first name of the contact.

Field Name	Details
IsInCrm	Type boolean Properties Defaulted on create, Group Description Whether the record is in Salesforce (true) or not (false).
IsInactive	Type boolean Properties Defaulted on create, Filter Description Whether the record is active (false) or not (true).
IsOwned	Type boolean Properties Defaulted on create Description • <code>True</code>: You own this record. • <code>False</code>: You do not own this record.
LastName	Type string Properties Filter, Nillable, Sort Description The last name of the contact.
Level	Type picklist Properties Filter, Group, Nillable, Restricted picklist Description A human resource label that designates a person's level in the company. The values of this field are fixed enumerated values. • <code>C-Level</code> • <code>VP</code> • <code>Director</code> • <code>Manager</code>

Field Name	Details
	• Staff • Other
Phone	Type phone Properties Nillable Description The direct-dial telephone number for the contact.
SocialHandles	Type string Description The social handles for this contact. Social handles are a normalized URL and user name for social media accounts such as, LinkedIn, Facebook, and Twitter. This field is response-only. The DatacloudSocialHandles object is a child of the DatacloudContact object.
State	Type string Properties Filter, Nillable, Sort Description The state where the company is located, which can also be a province or other equivalent to a state, depending on the country where the company is located.
Street	Type string Properties Nillable Description The street address for the company where the contact works.
Title	Type string Properties Filter, Group, Nillable, Sort Description Title of the contact such as CEO or Vice President.

Field Name	Details
UpdatedDate	Type dateTime Properties Nillable, Sort Description The last date and time when the information for a contact was updated.
Zip	Type string Properties Filter, Nillable Description The postal or zip code for the address.

Usage

This object searches the Data.com database for contacts with the specific criteria that you enter. Use this object to find contact records that you are interested in purchasing for your organization.

 **Important:** DatacloudContact can't be used in Apex test methods, because an external web service call is required to access it. These calls are not allowed in Apex test methods.

DatacloudDandBCompany

Represents a set of read-only fields that are used to return D&B company data from Data.com API calls. This object is available in API version 30.0 or later.

 **Note:** When your Data.com Prospector or Data.com Clean contract expires, Data.com features, objects, and fields will be removed from your org.

To support customers' needs around compliance and to remain a leader in trust and privacy, Salesforce removed all contact data from the Data.com service on February 1, 2021.

For more information, see [Data.com Prospector and Clean Retirement](#).

Supported Calls

`describeSObjects()`, `query()`

Fields

Field Name	Details
City	Type string Properties Nillable Description The name of the city where the company is physically located.
CompanyCurrencyIsoCode	Type picklist Properties Nillable, Restricted picklist Description The code used to represent a company's local currency. This data is provided by the International Organization for Standardization (ISO) and is based on their three-letter currency codes. For example, USD is the ISO code for United States Dollar.
CompanyId	Type string Properties Filter, Nillable, Sort Description A unique numeric identifier for a company.
Country	Type string Properties Nillable Description The country where a company is physically located.
CountryAccessCode	Type string Properties Nillable Description The required code for international calls.

Field Name	Details
CurrencyCode	Type picklist Properties Nillable, Restricted picklist Description The currency in which the company's sales volume is expressed.
Description	Type string Properties Nillable Description A brief description of the company, which may include information about its history, its products and services, and its influence on a particular industry.
DomesticUltimateBusinessName	Type string Properties Nillable Description The primary name of the Domestic Ultimate, which is the highest ranking subsidiary, specified by country, within an organization's corporate structure.
DomesticUltimateDunsNumber	Type string Properties Nillable Description The D-U-N-S number for the Domestic Ultimate, which is the highest-ranking subsidiary, specified by country, within an organization's corporate structure.
DunsNumber	Type string Properties Filter, Nillable Description The Data Universal Numbering System (D-U-N-S) number is a unique, nine-digit number assigned to every business location in the Dun & Bradstreet database that has a unique, separate, and distinct operation. D-U-N-S numbers are used by industries and organizations around the world as a global standard for business identification and tracking.

Field Name	Details
EmployeeQuantityGrowthRate	Type double Properties Nillable Description The yearly growth rate of the number of employees in a company expressed as a decimal percentage. The data includes the total employee growth rate for the past two years.
EmployeesHere	Type double Properties Nillable Description The number of employees at a specified location, such as a branch location.
EmployeesHereReliability	Type picklist Properties Nillable, Restricted picklist Description The reliability of the EmployeesHere figure. Available values are <i>Actual number, Low, Estimated (for all records), Modeled (for non-US records)</i>. A blank value indicates this data is unavailable.
EmployeesTotal	Type double Properties Nillable Description The total number of employees in the company, including all subsidiary and branch locations. This data is available only on records that have a value of <i>Headquarters/Parent</i> in the LocationStatus field.
EmployeesTotalReliability	Type picklist Properties Nillable, Restricted picklist

Field Name	Details
	Description The reliability of the EmployeesTotal figure. Available values are <i>Actual number, Low, Estimated (for all records), Modeled (for non-US records)</i> . A blank value indicates this data is unavailable.
ExternalId	Type string Properties Filter, Nillable, Sort Description A system generated numeric identification.
FamilyMembers	Type int Properties Nillable Description The total number of family members, worldwide, within an organization, including the Global Ultimate, its subsidiaries (if any), and its branches (if any).
Fax	Type phone Properties Nillable Description The company's facsimile number.
FifthNaics	Type string Properties Nillable Description A NAICS code that's used to further classify an organization by industry.
FifthNaicsDesc	Type string Properties Nillable

Field Name	Details
	Description A brief description of an organization's line of business, based on the corresponding NAICS code.
FifthSic	Type string Properties Nillable Description A Standard Industrial Classification (SIC) code that's used to further classify an organization by industry.
FifthSic8	Type string Properties Group, Nillable Description An additional SIC code used to further classify an organization by industry. Maximum size is 8 characters.
FifthSic8Desc	Type string Properties Group, Nillable Description A brief description of an organization's line of business, based on the corresponding SIC code. Maximum size is 80 characters.
FifthSicDesc	Type string Properties Nillable Description A brief description of an organization's line of business, based on the corresponding SIC code.
FipsMsaCode	Type string Properties Nillable

Field Name	Details
	Description The Federal Information Processing Standards (FIPS) and the Metropolitan Statistical Area (MSA) codes identify the organization's location. The MSA codes are defined by the US Office of Management and Budget.
FipsMsaDesc	Type string Properties Nillable Description A brief description of an organization's FIPS MSA code.
FortuneRank	Type int Properties Defaulted on create, Group, Nillable Description The numeric value of the company's Fortune 1000 ranking. A null or blank value means that the company isn't ranked as a Fortune 1000 company.
FourthNaics	Type string Properties Nillable Description A NAICS code used to further classify an organization by industry.
FourthNaicsDesc	Type string Properties Nillable Description A brief description of an organization's line of business, based on the corresponding NAICS code.
FourthSic	Type string Properties Group, Nillable

Field Name	Details
	Description A SIC code used to further classify an organization by industry.
FourthSic8	Type string Properties Group, Nillable Description An additional SIC code used to further classify an organization by industry. Maximum size is 8 characters.
FourthSic8Desc	Type string Properties Group, Nillable Description A brief description of an organization's line of business, based on the corresponding SIC code. Maximum size is 80 characters.
FourthSicDesc	Type string Properties Nillable Description A brief description of an organization's line of business, based on the corresponding SIC code.
GeoCodeAccuracy	Type picklist Properties Nillable, Restricted picklist Description The level of accuracy of a location's geographical coordinates compared with its physical address. Available values include <i>Rooftop level</i> , <i>Street level</i> , <i>Block level</i> , <i>Census tract level</i> , <i>Mailing address level</i> , <i>ZIP code level</i> , <i>Geocode could not be assigned</i> , <i>Places the address in the correct city</i> , <i>Not matched</i> , <i>State or Province Centroid</i> , <i>Street intersection</i> , <i>PO BOX location</i> , <i>Non-US rooftop accuracy</i> , <i>County Centroid</i> , <i>Sub Locality-Street Level</i> , and <i>Locality Centroid</i>

Field Name	Details
GlobalUltimateBusinessName	Type string Properties Nillable Description The primary name of the Global Ultimate, which is the highest entity within an organization's corporate structure and may oversee branches and subsidiaries.
GlobalUltimateDunsNumber	Type string Properties Filter, Nillable Description The D-U-N-S number of the Global Ultimate, which is the highest-ranking entity within an organization's corporate structure and can oversee branches and subsidiaries.
GlobalUltimateTotalEmployees	Type double Properties Nillable Description The total number of employees at the Global Ultimate, which is the highest entity within an organization's corporate structure and may oversee branches and subsidiaries.
ImportExportAgent	Type picklist Properties Nillable, Restricted picklist Description Identifies whether a business imports goods or services, exports goods or services, and/or is an agent for goods.
IncludedInSnP500	Type string Properties Group, Nillable Description A true or false value. If <code>true</code>, the company is listed in the S&P 500 Index. If <code>false</code>, the company isn't listed in the S&P 500 Index.

Field Name	Details
Industry	Type string Properties Group, Nillable Description A description of the type of industry such as Telecommunications, Agriculture, or Electronics.
IsOwned	Type boolean Properties Defaulted on create Description A true or false value. True, your organization owns the record. False, your organization doesn't own the record.
IsParent	Type boolean Properties Defaulted on create, Description A true or false value. True, the company is a parent company. False, the company isn't a parent company. A parent company owns other companies.
Latitude	Type string Properties Nillable Description Used with longitude to specify a precise location, which is used to assess the Geocode Accuracy.
LegalStatus	Type picklist Properties Nillable, Restricted picklist Description Identifies the legal structure of an organization. Available values include <i>Cooperative</i>, <i>Nonprofit organization</i>, <i>Local government body</i>, <i>Partnership of unknown type</i>, and <i>Foreign company</i>.

Field Name

Details

LocationStatus

Type

picklist

Properties

Filter, Nillable, Restricted picklist

Description

Identifies the organizational status of a company. A numeric value represents each value.

Organizational status	Numeric value
<i>Single location</i> : The business has no branches or subsidiaries.	0
<i>Headquarters/Parent</i> : A parent company that owns more than 50 percent of another company. When the company also has branches, it's the headquarters.	1
<i>Branch</i> : A secondary location of a business.	2



Note: Only the numeric value is accepted in an API request.

Longitude

Type

string

Properties

Nillable

Description

Used with latitude to specify a precise location, which is used to assess the Geocode Accuracy.

MailingCity

Type

string

Properties

Nillable

Description

The city where a company has its mail delivered.

MailingCountry

Type

string

Field Name	Details
	Properties Nillable Description The country where a company has its mail delivered.
MailingState	Type string Properties Nillable Description The state where a company has its mail delivered.
MailingStreet	Type string Properties Nillable Description The street address where a company has its mail delivered.
MailingZip	Type string Properties Nillable Description The postal zip code for the company.
MarketingPreScreen	Type picklist Properties Nillable, Restricted picklist Description The probability that a company pays with a significant delay compared to the agreed terms. The risk level is based on the standard Commercial Credit Score, and ranges from low risk to high risk. Available values are <i>High risk of delinquency</i> , <i>Low risk of delinquency</i> , and <i>Moderate risk of delinquency</i> .  Important: Use this information for marketing pre-screening purposes only.

Field Name	Details
MarketingSegmentationCluster	Type picklist Properties Nillable, Restricted picklist Description Twenty-two distinct, mutually exclusive profiles, created as a result of cluster analysis of Dun & Bradstreet data for US organizations. Available values include <i>High-Tension Branches of Insurance/Utility Industries, Rapid-Growth Large Businesses, Labor-Intensive Giants, Spartans, Main Street USA.</i>
MinorityOwned	Type picklist Properties Nillable, Restricted picklist Description Indicates whether an organization is owned or controlled by a member of a minority group.
Name	Type string Properties Filter, Nillable Description The primary or registered name of a company.
NationalId	Type string Properties Nillable Description The identification number used in some countries for business registration and tax collection.
NationalIdType	Type picklist Properties Nillable, Restricted picklist Description A code value that identifies the type of national identification number that's used.

Field Name	Details
OutOfBusiness	Type picklist Properties Nillable, Restricted picklist Description Indicates whether the company at the specified address has discontinued operations.
OwnOrRent	Type picklist Properties Nillable, Restricted picklist Description Indicates whether a company owns or rents the building it occupies.
ParentOrHqBusinessName	Type string Properties Nillable Description The primary name of the parent or headquarters company.
ParentOrHqDunsNumber	Type string Properties Filter, Nillable Description The D-U-N-S number for the parent or headquarters.
Phone	Type phone Properties Nillable Description A company's primary telephone number.
PremisesMeasure	Type int Properties Group, Nillable

Field Name	Details
	Description A numeric value for the measurement of the premises.
PremisesMeasureReliability	Type string Properties Group, Nillable Description A descriptive accuracy of the measurement such as actual, estimated, or modeled.
PremisesMeasureUnit	Type string Properties Group, Nillable Description A descriptive measurement unit such as acres, square meters, or square feet.
PrimaryNaics	Type string Properties Nillable Description The six-digit North American Industry Classification System (NAICS) code is the standard used by business and government to classify business establishments according to their economic activity for the purpose of collecting, analyzing, and publishing statistical data related to the US business economy.
PrimaryNaicsDesc	Type string Properties Nillable Description A brief description of an organization's line of business, based on its NAICS code.
PrimarySic	Type string Properties Nillable Description The four-digit SIC code that's used to categorize business establishments by industry.

Field Name	Details
PrimarySic8	Type string Properties Group, Nillable Description The eight-digit Standard Industrial Classification (SIC) code is used to categorize business establishments by industry. The full list of values can be found at the Optimizer Resources page maintained by Dun & Bradstreet. Maximum size is 8 characters.
PrimarySic8Desc	Type string Properties Group, Nillable Description A brief description of an organization's line of business, based on the corresponding SIC code. Maximum size is 80 characters.
PrimarySicDesc	Type string Properties Nillable Description A brief description of an organization's line of business, based on its SIC code.
PriorYearEmployees	Type int Properties Group, Nillable Description The total number of employees for the prior year.
PriorYearRevenue	Type double Properties Nillable Description The annual revenue for the prior year.
PublicIndicator	Type picklist

Field Name	Details
	Properties Nillable, Restricted picklist Description Indicates whether ownership of the company is public or private.
Revenue	Type double Properties Nillable Description The annual revenue of a company in US dollars.
SalesTurnoverGrowthRate	Type double Properties Nillable Description The increase in annual revenue from the previous value for an equivalent period expressed as a decimal percentage.
SalesVolume	Type double Properties Nillable Description The total annual sales revenue in the headquarters' local currency. Dun & Bradstreet tracks revenue data for publicly traded companies, Global Ultimates, Domestic Ultimates, and some headquarters.
SalesVolumeReliability	Type picklist Properties Nillable, Restricted picklist Description The reliability of the SalesVolume figure.
SecondNaics	Type string Properties Nillable

Field Name	Details
	Description A NAICS code used to further classify an organization by industry.
SecondNaicsDesc	Type string Properties Nillable Description A brief description of an organization's line of business, based on the corresponding NAICS code.
SecondSic	Type string Properties Nillable Description A SIC code used to further classify an organization by industry.
SecondSic8	Type string Properties Group, Nillable Description An additional SIC code used to further classify an organization by industry. Maximum size is 8 characters.
SecondSic8Desc	Type string Properties Group, Nillable Description A brief description of an organization's line of business, based on the corresponding SIC code. Maximum size is 80 characters.
SecondSicDesc	Type string Properties Nillable Description A brief description of an organization's line of business, based on the corresponding SIC code.

Field Name	Details
SixthNaics	Type string Properties Nillable Description A NAICS code used to further classify an organization by industry.
SixthNaicsDesc	Type string Properties Nillable Description A brief description of an organization's line of business, based on the corresponding SIC code.
SixthSic	Type string Properties Nillable Description A SIC code used to further classify an organization by industry.
SixthSic8	Type string Properties Group, Nillable Description An additional SIC code used to further classify an organization by industry. Maximum size is 8 characters.
SixthSic8Desc	Type string Properties Group, Nillable Description A brief description of an organization's line of business, based on the corresponding SIC code. Maximum size is 80 characters.
SixthSicDesc	Type string

Field Name	Details
	Properties Nillable Description A brief description of an organization's line of business, based on the corresponding SIC code.
SmallBusiness	Type picklist Properties Nillable, Restricted picklist Description Indicates whether the company is designated a small business as defined by the Small Business Administration of the US government.
State	Type string Properties Nillable Description The state where a company is physically located.
StockExchange	Type string Properties Nillable Description The corresponding exchange for a company's stock symbol, for example, NASDAQ or NYSE.
StockSymbol	Type string Properties Nillable Description The abbreviation that's used to identify publicly traded shares of a particular stock.
Street	Type string

Field Name	Details
	Properties Nillable Description The street address where a company is physically located.
Subsidiary	Type picklist Properties Nillable, Restricted picklist Description Indicates whether a company is more than 50 percent owned by another organization.
ThirdNaics	Type string Properties Nillable Description A NAICS code used to further classify an organization by industry.
ThirdNaicsDesc	Type string Properties Nillable Description A brief description of an organization's line of business, based on the corresponding NAICS code.
ThirdSic	Type string Properties Nillable Description A SIC code used to further classify an organization by industry.
ThirdSic8	Type string Properties Group, Nillable

Field Name	Details
	Description An additional SIC code used to further classify an organization by industry. Maximum size is 8 characters.
ThirdSic8Desc	Type string Properties Group, Nillable Description A brief description of an organization's line of business, based on the corresponding SIC code. Maximum size is 80 characters.
ThirdSicDesc	Type string Properties Nillable Description A brief description of an organization's line of business, based on the corresponding SIC code.
TradeStyle1	Type string Properties Nillable Description A name, different from its legal name, that an organization may use for conducting business. Similar to "Doing business as" or "DBA".
TradeStyle2	Type string Properties Nillable Description A tradestyle used by the organization.
TradeStyle3	Type string Properties Nillable Description A tradestyle used by the organization.

Field Name	Details
TradeStyle4	Type string Properties Nillable Description A tradestyle used by the organization.
TradeStyle5	Type string Properties Nillable Description A tradestyle used by the organization.
UsTaxId	Type string Properties Nillable Description The identification number for the company used by the Internal Revenue Service (IRS) in the administration of tax laws. Also referred to as Federal Taxpayer Identification Number.
Website	Type url Properties Filter, Group, Nillable Description An organization's primary website address.
WomenOwned	Type picklist Properties Nillable, Restricted picklist Description Indicates whether a company is more than 50 percent owned or controlled by a woman.
YearStarted	Type string

Field Name	Details
	Properties Nillable Description The year when the company was established or the year when current ownership or management assumed control of the company.
zip	Type string Properties Nillable Description A five or nine-digit code that's used to help sort mail.

Usage

Use this object to return D&B Company information. These fields are read-only.



Important: DatacloudDandBCompany can't be used in Apex test methods, because an external web service call is required to access it. These calls are not allowed in Apex test methods.

DatacloudOwnedEntity

Represents fields in the DatacloudOwnedEntity object. The DatacloudOwnedEntity object tracks user-purchased records. This object is available in API version 30.0 or later.



Note: When your Data.com Prospector or Data.com Clean contract expires, Data.com features, objects, and fields are removed from your org.

To support customers' needs around compliance and to remain a leader in trust and privacy, Salesforce removed all contact data from the Data.com service on February 1, 2021.

For more information, see [Data.com Prospector and Clean Retirement](#).

Supported Calls

`create()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field Name	Details
DataDotComKey	Type string

Field Name	Details
	Properties Create, Filter, Sort Description The Data.com contact or company record identification number used by the DatacloudPurchaseUsage object to keep track of purchased records. This is equivalent to the Data.com record ID for a contact or company.
DatacloudEntityType	Type picklist Properties Create, Filter, Restricted picklist, Sort Description The type of Data.com record you want to purchase. • 0—contact • 1—company
Name	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description An optional field used to name your record.
PurchaseType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description A read only field set by the API to identify the purchase type. • Added • Export • API
PurchaseUsageId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The unique identification number for the DatacloudPurchaseUsage object created by making a REST POST request.

Field Name	Details
	0—contact 1—company
UserId	Type reference Properties Filter, Group, Sort Description A unique identifier for the user making the purchase.

Usage

The Datacloud object that tracks records that are purchased and owned by a specific user.

DatacloudPurchaseUsage

Represents an object used to identify and track Data.com record purchases. This object is available in API version 30.0 or later.



Note: When your Data.com Prospector or Data.com Clean contract expires, Data.com features, objects, and fields are removed from your org.

To support customers' needs around compliance and to remain a leader in trust and privacy, Salesforce removed all contact data from the Data.com service on February 1, 2021.

For more information, see [Data.com Prospector and Clean Retirement](#).

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
DatacloudEntityType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of Data.com record you want to purchase. 0—indicates contact entity type.

Field Name	Details
	1—indicates company entity type.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An optional field. You can add a description for your purchase.
Name	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description An optional field used to name your record.
PurchaseType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description A read only field set by the API to identify the purchase type. - Added - Export - API
Usage	Type double Properties Filter, Sort Description A read only field set by the API. It is used to track the points used to purchase records.
UserId	Type reference Properties Filter, Group, Sort Description A read only field set by the API that identifies the user purchasing the records.

Field Name	Details
UserType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A read only field set by the API with 2 user types. - Monthly Usage - List Pool User

Usage

The DatacloudPurchaseUsage object allows you to track Data.com record purchases for CRM users.

DataDetectJobObjectSession

For internal use only. This object is available in API version 63.0 and later.

SEE ALSO:

[Salesforce Help: Data Detect](#)

DataDetectJobSession

Represents a run of a DataDetect scan policy that's triggered manually. This object is available in API version 63.0 and later.

To opt in for beta, contact your Salesforce account executive. After enabling the org permission, users can access the Data Detect app from the app launcher.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`

Fields

Field	Details
DataDetectPolicyId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description ID of the scan policy associated with this job session. This field is a relationship field. Relationship Name DataDetectPolicy Refers To DataDetectPolicy
DataDetectPolicySnapshotId	Type reference Properties Filter, Group, Sort Description ID of the snapshot of the scan policy associated with this job session. This field is a relationship field. Relationship Name DataDetectPolicySnapshot Relationship Type Master-Detail Refers To DataDetectPolicySnapshot
SessionEndTime	Type dateTime Properties Filter, Nillable, Sort Description Time and date when the data scan completes.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Auto-generated name of the job session.
NamedEntityCount	Type int Properties Create, Filter, Nillable, Update

Field	Details
	Description Aggregate count of PII found during the data scan.
PolicyJobStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Status of the data scan. Valid values are: • Stopped • Completed • Failed • PartialSuccess • Running • Scheduled • TimedOut The default value is Scheduled.
RunByUser	Type string Properties Filter, Group, Nillable, Sort Description User who started the job session or data scan.
SessionStartTime	Type dateTime Properties Filter, Nillable, Sort Description Time and date when the data scan begins.

Associated Objects

This object has this associated object. If the API version isn't specified, it's available in the same API version as this object. Otherwise, it's available in the specified API version and later.

DataDetectJobSessionFeed

Feed tracking is available for the object.

SEE ALSO:

[Salesforce Help: Data Detect](#)

DataDetectJobSessSummary

For internal use only. This object is available in API version 66.0 and later.

DataDetectPolicy

Represents a set of parameters that specifies the types of sensitive data for search with in a data scan. DataDetect scan policies can also apply filters to a data scan, along with specific objects and fields for scanning. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the scan policy.
EndTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Time and date when the data scan completes.
IsScheduled	Type Boolean Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description Determines if the policy is scheduled or not.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the scan policy.
OwnerId	Type reference Properties Create, Filter, Group, idLookup, Sort, Update Description The UserID of the person who owns the record. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
ScanType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Designates whether the data scan type is <code>AIInference</code> or <code>PatternMatching</code> . The default value is <code>PatternMatching</code> .
StartTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Time and date when the data scan begins. Data scans can start anytime within a 30-day window from the current date.

SEE ALSO:

[Salesforce Help: Data Detect](#)

DataDetectPolicyObject

Represents an object of the DataDetect scan policy to be scanned. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
DataDetectPolicyId	Type reference Properties Create, Filter, Group, Sort Description ID of the scan policy associated with this scan policy object. This field is a relationship field. Relationship Name DataDetectPolicy Relationship Type Master-Detail Refers To DataDetectPolicy
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the scan policy object.
ObjectReference	Type string Properties Create, Filter, Group, Sort, Update

Field	Details
	Description Name of the scan policy object to be scanned.

SEE ALSO:
[Salesforce Help: Data Detect](#)

DataDetectScanResult

Represents the results of a DataDetect data policy scan. This object is available in API version 63.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
CreatedDate	Type dateTime Properties Filter, Nillable, Sort Description Time and date when an instance of PII is added to the scan result.
DataDetectJobSessionId	Type reference Properties Filter, Group, Sort Description ID of the job session associated with the scan policy. This field is a relationship field. Relationship Name DataDetectJobSession Relationship Type Lookup Refers To DataDetectJobSession

Field	Details
FieldName	Type string Properties Filter, Group, Sort Description UMD name from standard fields, or custom field ID from custom fields.
NamedEntityCount	Type int Properties Filter, Group, Sort Description Number of times PII is found.
NamedEntityType	Type string Properties Filter, Group, Sort Description Type of PII found in the record of the scan policy object.
ObjectName	Type string Properties Filter, Group, Sort Description KeyPrefix of the scan policy object that contains PII.
RecordIdentifier	Type string Properties Filter, Group, Sort Description Unique identifier for the record.
SensitiveValues	Type text Properties Filter, Nillable, Sort

Field	Details
	Description Stores the excerpts in the form of encrypted text.

SEE ALSO:
[Salesforce Help: Data Detect](#)

DataDetectPolicyObjField

Represents an object field of the DataDetect scan policy object to be scanned. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
DataDetectPolicyObjectId	Type reference Properties Create, Filter, Group, Sort Description ID of the scan policy object associated with the scan policy object's field. This field is a relationship field. Relationship Name DataDetectPolicyObject Relationship Type Master-Detail Refers To DataDetectPolicyObject
FieldName	Type string Properties Create, Filter, Group, Sort, Update

Field	Details
	Description Name of the scan policy object field.

SEE ALSO:
[Salesforce Help: Data Detect](#)

DataDetectPolicySnapshot

For internal use only. This object is available in API version 64.0 and later.

SEE ALSO:
[Salesforce Help: Data Detect](#)

DataDetPlcyDataSrchExps

Represents data search expressions for scanning DataDetect scan policies based on Java regex. This object is available in API version 64.0 and later.

 **Note:** When working with regex, Salesforce recommends Java 17 or later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
DataDetectPolicyId	Type reference Properties Create, Filter, Group, Sort Description ID of the scan policy associated with the data search expression. This field is a relationship field. Relationship Name DataDetectPolicy Relationship Type Master-Detail

Field	Details
	Refers To DataDetectPolicy
Expression	Type string Properties Create, Filter, Group, Sort, Update Description Regular expression that represents sensitive data to be scanned.
IsCaseSensitive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Designates whether the expression is case-sensitive (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .
IsKeywordSearch	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Designates whether the expression can be used as a search keyword (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the expression.

SEE ALSO:

[Salesforce Help: Data Detect](#)

DataDetPlcyMdatScanCrit

Represents inclusion and exclusion criteria that filter what DataDetect scan policy object fields are to be scanned based on metadata tags. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Criteria	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Defines category of inclusion or exclusion criteria applied to fields during scan policy creation. Valid values are: • ComplianceCategory—Compliance acts, definitions, or regulations related to the field's data. • DataSensitivity—Level of data sensitivity related to the field's data. • FieldUsage—Data planned for deprecation, or intended to be hidden, related to the active and visible field's data.
DataDetectPolicyId	Type reference Properties Create, Filter, Group, Sort Description ID of the policy associated with the data search expression. This field is a relationship field. Relationship Name DataDetectPolicy Relationship Type Master-Detail Refers To DataDetectPolicy
Name	Type string

Field	Details
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the criteria.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Defines what criteria, <code>inclusion</code> or <code>exclusion</code> , is applied to a field in the policy scan object.
Value	Type string Properties Create, Filter, Group, Sort, Update Description Value of the criteria applied to filters.

SEE ALSO:

[Salesforce Help: Data Detect](#)

DataDetPlcySstvDataCatg

Represents the sensitive data categories that the DataDetect scan policy is required to scan. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
DataCategory	Type string Properties Create, Filter, Group, Sort, Update

Field	Details
	Description Sensitive data category associated with the scan policy.
DataDetectPolicyId	Type reference Properties Create, Filter, Group, Sort Description ID of the scan policy associated with the sensitive data category. This field is a relationship field. Relationship Name DataDetectPolicy Relationship Type Master-Detail Refers To DataDetectPolicy
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the sensitive data category.

SEE ALSO:

[Salesforce Help: Data Detect](#)

DataEncryptionKey

The DataEncryptionKey object is part of the Bring Your Own Key (BYOK) feature, which allows users to upload a data encryption key (DEK) using a public key generated by the Salesforce Shield Key Management Service (KMS). Customers create their own DEKs and upload them to Salesforce. Users access this entity via the API to list DEK keys for auditing purposes. They can also programmatically use this object to create the certificate and to upload key material. This object is available in API version 63.0 and later.

DEKs are used to encrypt and decrypt data. They reside in either the Salesforce database or in an external KMS. They're created by root keys, and when persisted, wrapped by root keys as well.

Supported Calls

`create()`, `describeObjects()`, `query()`, `queryAll()`

Special Access Rules

This object is available as part of the Shield and Salesforce Platform Encryption add-on subscriptions.

Fields

Field	Details
CreatedBy	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The email address of the user who created the DEK. For example, <code>user@example.com</code>.
DataEncryptionKeyCertName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the certificate whose public key is used to encrypt the <code>DEK</code> during a remote key callout. When you want to create a BYOK-compatible certificate, use this property in a call to <code>create()</code> to name the certificate. You need to know the name to retrieve the certificate later. Specify only the file name. Salesforce will add the <code>.crt</code> extension when it creates the file.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The user-defined description of the root key.
DoesUseKeyDerivation	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the DEK is intended to be used as part of a derived key (<code>true</code>) or not (<code>false</code>). See Components Involved in Deriving Keys for information on derived keys. The default value is <code>false</code>.
LastModifiedBy	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The email address of the user who most recently modified the key. For example, <code>user@example.com</code> .
RootKeyIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The unique key identifier assigned by Salesforce to the root key used to create the DEK.
RootKeyKmsIdentifier	Type string Properties Create, Filter, Nillable, Sort, Update Description The unique key identifier from the external KMS, such as an AWS Amazon Resource Name (ARN). For example, <code>arn:aws:kms:us-west-2:123456789000:key/123ab456-7cd8-9012-3e4f-5gh678i901j2</code>
SecretValue	Type textarea Properties Create, Nillable, Update Description The encrypted 256-bit secret value encoded in base64.
SessionToken	Type textarea Properties Create, Nillable, Update Description Contains the token for the session that was active when the DEK was last wrapped. If the session is inactive, a new certificate is required in order to transmit the DEK.
Source	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The source of the encryption key material. Values are: • <code>AWS</code>—A tenant secret or DEK fetched from the Amazon Key Management Service DEKs with a <code>Source</code> value of <code>AWS</code> are listed as <code>Fetch</code>d on the Key Management page in Setup. • <code>Salesforce</code>—A Salesforce-generated DEK.
Status	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The status of the key. Possible values are: • <code>Activation Pending</code>—Salesforce is waiting for confirmation of a valid key policy in the external key store. • <code>Active</code>—Can be used to encrypt new DEKs and decrypt existing DEKs. • <code>Archived</code>—Can't encrypt new DEKs. Can be used to decrypt previously created DEKs. • <code>Canceled</code>—Root key activation canceled by a user. • <code>Inactive</code>—The root key, and the DEKs that it encrypts, are inaccessible. Inaccessible DEKs can't be used to decrypt data, which renders that data also inaccessible.
Type	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The type of DEK. This value appears in the <code>Type</code> picklist: • <code>Search Index</code>—search index files. For Hyperforce orgs on API version 63.0 and later, create secrets of type <code>SearchIndex</code> using the <code>DataEncryptionKey</code> object. For Hyperforce orgs on API versions 62.0 and earlier, and for all non-Hyperforce orgs, create secrets of type <code>SearchIndex</code> using the TenantSecret object. You also specify a type of <code>SearchIndex</code> when you are creating a BYOK-compatible certificate using the <code>DataEncryptionKey</code> object.
Version	Type int Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The version number of this secret. The version number is unique within your org.

Usage

Four functions are available: `describe()`, `create()`, `query()` and `queryAll()`.

- Use `create()` to create BYOK-compatible certificates and DEKs.
- Use `query()` or `queryAll()` to list one or all of your DEKs.
- Use `describe()` to get information about the `DataEncryptionKey` object.

You use `create()` and `queryAll()` together to upload a Search Index Encryption DEK. Check the Examples section for how to do each of these steps.

- Create a BYOK-compatible certificate with `create()`. This will create a temporary DEK to contain the certificate reference. Specify a Type of `Search Index` and a name for the certificate file.
- Use `queryAll()` to list your DEKs. The temporary DEK will include the name of your certificate file in the `DataEncryptionKeyCertName` attribute. It will also include a session token in the `sessionToken` attribute. Save this value for later.
- Download the certificate using the metadata object API. Specify `Certificate` for the object name node, and the `DataEncryptionKeyCertName` for the members node. The certificate file will be in the zip file returned by the metadata object API.
- Run the [BYOK Search Index Encryption script](#) to generate the **payload.bin** file which contains the plaintext of your new DEK. Use the certificate file you created when you run the script. Alternatively, generate a key using a method of your choice. It must meet the specifications outlined in [Bring Your Own Key Overview](#).
- Generate a b64 string from the contents of the **payload.bin** file.
- Run the `DataEncryptionKey.create()` method again, this time with the the b64 string and the session token. Specify:

```
"SecretValue": "<b64 string>"
"SessionToken": "<session token string>"
"Type": "SearchIndex"
```

With success, the temporary DEK is replaced by the uploaded secret. The certificate is deleted, and the session token eventually expires. A call to `queryAll()` will show the new DEK. The DEK will also appear on the Search Index Encryption Key Management page.

Examples

Use your preferred developer environment to run the examples. Use the Salesforce developer [Introduction to REST API](#) for basic information on making REST calls into Salesforce. Also, [Introducing the Salesforce Shield Platform Encryption REST API](#) gives you starter information on using REST to work with Shield Platform Encryption.

Create a BYOK-compatible certificate with `create ()`

To create a BYOK-compatible certificate, use a POST method to create an sObject of type `DataEncryptionKey`. Specify a Type of `search index` (case insensitive), and an appropriate string value for `DataEncryptionKeyCertName`. You need to name the certificate to retrieve it later. Specify just the name. Salesforce will add the `.cert` extension to the file.

```
curl --location 'https://DOMAIN.my.salesforce.com/services/data/v62.0/subjects/'\
      DataEncryptionKey/create' \
      --header 'Content-Type: application/json' \
      --header 'Authorization: Bearer TOKEN' \
      --data '{
        "Type": "search index",
        "DataEncryptionKeyCertName": "my-byok-compatible-cert"
      }'
```

List all DEKs with `queryAll ()`

To retrieve DEKs, use `query` or `queryAll` on the `DataEncryptionKey` sObject. You must specify a limit for the query. All DEKs are retrieved, including archived DEKs. You use `queryAll` to get the session token.

```
curl --location
      'https://DOMAIN.my.salesforce.com/services/data/v63.0/queryAll/?q=SELECT+FIELDS(ALL)+FROM+DataEncryptionKey+LIMIT+10' \
      --header 'Authorization: Bearer TOKEN'
```

Download your Certificate

Retrieve the certificate using [Metadata API](#). object to download your new certificate.

```
<?xml version="1.0" encoding="UTF-8"?>
<Package xmlns="http://soap.sforce.com/2006/04/metadata">
  <types>
    <members>DataEncryptionKeyCertName</members>
    <name>Certificate</name>
  </types>
  <version>65.0</version>
</Package>
```

Your certificate will be contained in the `cert` folder.

Create a DEK with `create ()`

To create the final DEK, use a POST method to create an sObject of type `DataEncryptionKey`. Specify a Type of `search index` (case insensitive).

```
curl --location
      'https://DOMAIN.my.salesforce.com/services/data/v63.0/subjects/DataEncryptionKey/create' \
      --header 'Content-Type: application/json' \
      --header 'Authorization: Bearer TOKEN' \
      --data '{
        "SecretValue": "b64-secret"
        "SessionToken": "session-token value"
        "Type": "search index"
      }'
```

Describe a DataEncryptionKey with `describe()`

To get information about the DataEncryptionKey sObject, use `describe`.

```
curl --location 'https://DOMAIN.my.salesforce.com/services/data/v62.0/objects/'\
      DataEncryptionKey/describe'
      --header 'Content-Type: application/json' \
      --header 'Authorization: Bearer TOKEN'
```

On success, the response is the full JSON description of the DataEncryptionKey sObject.

Return Values for `Create()`

The response for creating a certificate or DEK are the same. On success, the response is be similar to

```
{
  "totalSize": (COUNT),
  "done": true,
  "records": [
    {
      "attributes": {
        "type": "DataEncryptionKey",
        "url": "/services/data/v63.0/objects/DataEncryptionKey/(ID) "
      },
      ATTRIBUTE LIST
    },
  ]
}
```

On error, the response is similar to

```
[
  {
    "message": "ERROR MESSAGE",
    "errorCode": "ERROR CODE"
  }
]
```

DataIntegrationRecordPurchasePermission

Indicates Lightning Data purchase credits that a Salesforce admin has granted to users.

This object is available in API versions 42.0 and later.

Supported Calls

`describeSObjects()`, `create()`, `delete()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only your Salesforce org's internal users can access this object.

Fields

Field Name	Details
ExternalObject	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates the name of the data service record matched to the Salesforce record.
UserId	Type reference Properties Create, Filter, Group, Sort, Update Description Indicates the ID of a user to whom purchase credits are assigned. This is a relationship field. Relationship Name User Relationship Type Lookup Refers To User
UserRecordPurchaseLimit	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Represents the number of purchase credits assigned to a user.

DataKitDeployEvent

Represents a data kit deployment event that notifies subscribers of the status of the data kit component deployment. This object is available in API version 61.0 or later.

Supported Calls

`create()`, `describeSObjects()`

Special Access Rules

Users that have access to Data Cloud.

Fields

Field	Details
DataKitDeployStatus	Type picklist Properties Create, Nillable, Restricted picklist Description The deployment status of the components deployed from a data kit. This field is available in API version 63.0 and later. Possible values are: • Active • Deleting • Error • Inactive • Processing
DataKitName	Type string Properties Create, Nillable Description Name of the data kit from which a component is deployed.
DataspaceName	Type string Properties Create, Nillable Description Name of the data space into which a component is deployed.
DeployStartTime	Type dateTime Properties Create, Nillable Description The date and time the deployment starts.

Field	Details
ErrorDetails	Type textarea Properties Create, Nillable Description Explanation of the error.
EventCreationDate	Type dateTime Properties Create, Nillable Description The date and time the data kit deploy creation event was created.
EventPublishDate	Type dateTime Properties Create, Nillable Description The date and time of the data kit deploy publish event.
EventType	Type picklist Properties Create, Nillable, Restricted picklist Description The event type action of the data kit components. Available in API version 66.0 and later. Possible values are: • Deploy • Undeploy
EventUuid	Type string Properties Nillable Description The unique ID of the event.
IsDataKitDeployStatusSuccess	Type string

Field	Details
	Properties Create, Nillable Description Status of the data kit component deployment. Possible values are: • Active • Failure
JobIdentifier	Type string Properties Create, Nillable Description Data kit component deployment job identifier.
ReplayId	Type string Properties Nillable Description The ID of the data kit deploy event replay.
TemplateName	Type string Properties Create, Nillable Description The template name from which the data kit deploy event is created.

DataKitDeploymentLog

Represents the log details of a data kit component deployment. This object is available in API version 61.0 or later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Users that have access to Data Cloud.

Fields

Field	Details
BundleName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Name of the data stream bundle if a data stream is deployed from a data kit.
ComponentName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Name of the component that's deployed from a data kit.
ComponentTemplateId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the data kit template from which the component is deployed. This field is a polymorphic relationship field. Relationship Name ComponentTemplate Refers To DataSourceBundle
ComponentType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of the component for which the deployment is tracked in the log details. Possible values are: • MktCalculatedInsight • MktDataLakeObject • MktDataModelObject • MktDataStream • MktDataTransform

Field	Details
	Possible values available in API version 63.0 and later are: • <code>ActivationTarget</code> • <code>DataAction</code> • <code>DataActionTarget</code> • <code>DataGraph</code> • <code>DataSemanticSearch</code> • <code>EngagementSignal</code> • <code>ExtDataShare</code> • <code>IdentityResolution</code> • <code>MarketSegment</code> • <code>MarketSegmentActivation</code> • <code>MktDataConnection</code> • <code>MktMLModel</code> • <code>PersonalizationObjective</code> • <code>PersonalizationRecommender</code> Possible values available in API version 64.0 and later are: • <code>IrRelatedListEnrichment</code> • <code>MktCalculatedInsight</code> • <code>MktDataLakeObject</code> • <code>MktDataStream</code> • <code>MktDataTransform</code> • <code>PersonalizationPoint</code> • <code>PersonalizationSchema</code> Possible values available in API version 66.0 and later are: • <code>CopyFieldEnrichment</code> • <code>SemanticModel</code>
<code>DataKitName</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Name of the data kit being deployed.
<code>DataPackageKitDefinition</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description ID of the data kit being deployed. Available in API version 63.0 and later. Possible values are: • <code>1dk.Collections</code> • <code>1dk.SalesNextGenForecastingDatakit</code> • <code>1dk.Test_Fbdk</code> • <code>1dk.sf_mktg_ae__Marketing_Account_Engagement_CRM_Data</code>
DataSpaceName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Name of the data space the components are deployed to.
DeployJob	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The deployment job ID.
DeploymentAction	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Deployment action of the data kit components. Possible values are: • <code>Deploy</code> • <code>Undeploy</code>
DeploymentError	Type textarea Properties Create, Nillable, Update Description Contains the error details if the data kit deployment fails.

Field	Details
DeploymentStatus	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Deployment status of the data kit components. Possible values are: - Failed - Started - Successful
FileBasedComponentTemplate	Type string Properties Create, Filter, Sort, Update Description ID of the file-based component template that corresponds to the deployment log entry. Available in API version 63.0 and later.
FlowInterviewIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Identifier of the flow interview if the deployment was triggered using a flow.
JobIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Identifier of the data kit component deployment job. Available in API version 66.0 and later.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed the deployment log file.

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this deployment log.
Name	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The name of the deployment log.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user that owns the deployment. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
PublisherOrgComponentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the component in the publisher org. This field is a polymorphic relationship field. Relationship Name PublisherOrgComponent Refers To MktCalculatedInsight, MktDataTransform
SubscriberOrgComponentId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The ID of the component in the subscriber org in which the components of a data kit are deployed. This field is a polymorphic relationship field.
	Relationship Name SubscriberOrgComponent
	Refers To ActivationTarget, DataGraph, DataStream, ExtDataShare, IdentityResolution, MarketSegment, MarketSegmentActivation, MktCalculatedInsight, MktDataTransform
TemplateVersion	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The version of the template from which the deployment was done.

Usage

Use the DataKitDeploymentLog object to track the deployment of a data kit component.

DatasetExport

Represents a dataset exported from CRM Analytics. When a dataset is exported, the data is converted into a .csv file and the schema is stored in a separate JSON file. These files are stored in two objects: DatasetExport and DatasetExportPart. DatasetExport acts as the header and includes the JSON schema.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
CompressedMetadataLength	Type int
	Properties Filter, Group, Nillable, Sort

Field	Details
	Description This field is required when a record in an object contains a BLOB (binary large object) field. In the DataExport object, Metadata is the BLOB field.
Metadata	Type base64 Properties Nullable Description Contains the JSON schema that describes the data in the CSV. This schema includes column metadata such as type, format, and defaultValue.
MetadataLength	Type int Properties Filter, Group, Nullable, Sort Description This field is required when a record in an object contains a BLOB (binary large object) field. In the DataExport object, Metadata is the BLOB field.
Owner	Type string Properties Filter, Group, Nullable, Sort Description User ID of the owner, as specified in the <code>userId</code> parameter in the export node of the dataflow that created the record. Only the specified owner can read the content of the record.
PublisherInfo	Type string Properties Filter, idLookup, Sort Description Identifies the export record to facilitate searching when a user has multiple export records. By default, this column is set to the ID of the dataflow that generated the export record, concatenated with the name of the specific export node. PublisherInfo is unique within your organization.  Note: A dataflow can have multiple export nodes.
PublisherType	Type picklist

Field	Details
	Properties Filter, Group, Restricted picklist, Sort Description Target of the export, as specified in the <code>target</code> parameter in the export node of the dataflow that created the record. The value must be <i>EinsteinDiscovery</i>.
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Status of the export. The possible values are: • New • InProgress • Completed • Canceled • Failed  Note: The content of the Metadata field can be downloaded when the status is Completed.

Usage

This object is used with the DatasetExportPart object for exporting data from a dataset in CRM Analytics for use in Einstein Discovery. An export is initiated using the export node in an Analytics dataflow.

SEE ALSO:

[DatasetExportPart](#)

DatasetExportPart

Represents a dataset exported from CRM Analytics. When a dataset is exported, the data is converted into a .csv file and the schema is stored in a separate JSON file. These files are stored in two objects: DatasetExport and DatasetExportPart. DatasetExportPart contains parts of the .csv file.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
CompressedDataFileLength	Type int Properties Filter, Group, Sort Description This field is required when a record in an object contains a BLOB (binary large object) field. In the DataExportPart object, DataFile is the BLOB field.
DataFile	Type base64 Description Contains a part of the dataset data from the generated .csv file. Maximum size is 32 MB.
DataFileLength	Type int Properties Filter, Group, Sort Description This field is required when a record in an object contains a BLOB (binary large object) field. In the DataExportPart object, DataFile is the BLOB field.
DatasetExportId	Type reference Properties Filter, Group, Sort Description ID of the parent record that the part record is associated with.
Owner	Type string Properties Filter, Group, Sort Description User ID of the owner, as specified in the <code>userId</code> parameter in the export node of the dataflow that created the record. Only the specified owner can read the content of the record.
PartNumber	Type int Properties Filter, Group, Sort

Field	Details
	Description Used with the DatasetExportId to uniquely identify the data part. Parts are assembled sequentially based on their numbers.

Usage

This object is used with the DatasetExport object for exporting data from a dataset in CRM Analytics for use in Einstein Discovery. An export is initiated using the export node in an Analytics dataflow.

SEE ALSO:

[DatasetExport](#)

DataMaskCustomValueLibrary

Represents a set of user-inputted values in a custom library in Data Mask. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available with the Sandbox Data Mask managed package.

Fields

Field	Details
ContentType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The type of value used in a field of the custom library. Possible values are: • <code>email</code> • <code>number</code> • <code>phone_number</code> • <code>string</code>

Field	Details
	url
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the value in the custom library.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Represents whether the library is active or inactive for use. The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the custom library.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description The ID of the owner of the custom library. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
Type	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Represents how the values were added to the library. Possible values are: • default • user_defined
Values	Type textarea Properties Create, Nillable, Update Description The content of the value field for masking data.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[DataMaskCustomValueLibraryOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[DataMaskCustomValueLibraryShare](#) on page 67

Sharing is available for the object.

DataStatistics

For internal use only.

DataUseLegalBasis

Represents the legal basis for contacting a customer, such as billing or contract. This object is available in API version 45.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available if Data Protection and Privacy is enabled.

Fields

Field Name	Details
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the data use legal basis.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string

Field Name	Details
	Properties Create, Filter, Group, idLookup, Sort, Update Description Specifies a name for the legal basis. For example, “billing” or “contract”.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of the account associated with this customer. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
Source	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the source of the legal basis. For example, the URL of a contract.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[DataUseLegalBasisChangeEvent](#) (API version 62.0)

Change events are available for the object.

[DataUseLegalBasisHistory](#)

History is available for tracked fields of the object.

[DataUseLegalBasisOwnerSharingRule](#)

Sharing rules are available for the object.

[DataUseLegalBasisShare](#)

Sharing is available for the object.

DataUsePurpose

Represents the reason for contacting a prospect or customer, such as for billing, marketing, or surveys. This object is available in API version 45.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available if Data Protection and Privacy is enabled.

Fields

Field Name	Details
CanDataSubjectOptOut	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Required. Indicates whether the customer can decline contact for the described purpose.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the purpose for contacting a customer.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime

Field Name	Details
	Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
LegalBasisId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Identifies the legal basis record associated with the data use purpose. This is a relationship field. Relationship Name LegalBasis Relationship Type Lookup Refers To DataUseLegalBasis
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Identifies the reason for contacting a customer. For example, billing or marketing.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of the account associated with this customer. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup

Field Name	Details
	Refers To Group, User
PurposeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of an object containing data specific to the data use purpose. This is a polymorphic relationship field. Relationship Name Purpose Relationship Type Lookup Refers To Asset, CareProgram, CareRegisteredDevice, or Product2

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

DataUsePurposeChangeEvent (API version 62.0)

Change events are available for the object.

DataUsePurposeHistory

History is available for tracked fields of the object.

DataUsePurposeOwnerSharingRule

Sharing rules are available for the object.

DataUsePurposeShare

Sharing is available for the object.

DataWeaveResource

Represents the DataWeaveScriptResource class that is generated for all DataWeave scripts. This object is available in API version 58.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`

Fields

Field	Details
ApiVersion	Type double Properties Filter, Sort Description The API version of this component.
BodyLength	Type int Properties Filter, Group, Sort Description Size of the DataWeave script (in bytes).
ContentType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Possible value: • <code>dw1</code>: The metadata file for the DataWeave scripts that are deployed to an org.
DeveloperName	Type string Properties Filter, Group, Sort Description The unique name of the object in the API.
IsGlobal	Type boolean Properties Defaulted on create, Filter, Group, Sort Description When set to true, the <code>generatedDataWeaveScriptResource</code> class is global. The default value is <code>false</code>.
IsProtected	Type boolean

Field	Details
	Properties Defaulted on create, Filter, Group, Sort Description Not used
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language of the MasterLabel.
MasterLabel	Type string Properties Filter, Group, Sort Description Required. The name of the resource.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that aren't Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.

Usage

Although the `DataWeaveResource` object supports the create and update field properties, a runtime exception occurs if you try to create, update, or delete using the API. Instead, use the Salesforce Extensions for Visual Studio Code.

DatedConversionRate

Represents the dated exchange rates used by an organization for which the multicurrency and the effective dated currency features are enabled.

Supported Calls

`delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`,

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
ConversionRate	Type double Properties Filter, Update Description Required. Conversion rate of this currency type against the corporate currency.
IsoCode	Type picklist Properties Filter, Restricted picklist Description Required. ISO code of the currency. Must be one of the valid alphabetic, three-letter currency ISO codes defined by the ISO 4217 standard, such as <code>USD</code> , <code>GBP</code> , or <code>JPY</code> . Must be unique within your organization. Label is Currency ISO Code .
NextStartDate	Type date Properties Filter, Nillable Description Read only. The date on which the next effective dated exchange rate will start. Effectively the day after the end date for this exchange rate.
StartDate	Type date

Field	Details
	Properties Filter
	Description The date on which the effective dated exchange rate starts. The timestamp is determined by the base calendar of the API.

Usage

This object is for multicurrency organizations with advanced currency management enabled. Use this object to define the exchange rates your organization uses for a date range. This object is not available in single-currency organizations, nor is it available if the organization does not have advanced currency management enabled.

DealIndirectPartner

Represents an indirect partner's involvement in a deal. This object is available in API version 63.0 and later.

A DealIndirectPartner record can be created manually or through automation when a partner is associated with an opportunity, lead, or account, capturing role and contact information.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The account associated with the indirect partner on the deal. This field is a relationship field. Relationship Name Account Refers To Account
LastReferencedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The timestamp when the record was last referenced by the user or system.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Date and the timestamp when the record was last viewed in the Salesforce UI. Helps monitor user access and engagement.
LeadId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Reference to a lead associated with this indirect partner record. This field is a relationship field. Relationship Name Lead Refers To Lead
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description System-generated unique identifier for the record, used for lookup and reference purposes.
OpportunityId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Opportunity associated with the indirect partner. This field is a relationship field. Relationship Name Opportunity

Field	Details
	Refers To Opportunity
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description User or group that owns this record. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
PartnerName	Type string Properties Create, Filter, Group, Sort, Update Description Name of the indirect partner participating in the deal. This field captures the business or entity name.
PartnerRoleType	Type picklist Properties Create, Filter, Group, Sort, Update Description The role played by the indirect partner in the deal. Common values might include Reseller, Distributor, and so on.
PrimaryContactFirstName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description First name of the primary contact at the partner organization.
PrimaryContactLastName	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Last name of the primary contact at the partner organization.
PrimaryContactName	Type string Properties Filter, Group, Nillable, Sort Description Full name of the primary contact. This field may be auto-generated by combining first and last names or used for reporting purposes.
PrimaryContactSalutation	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Salutation for the primary contact. Possible values are: • Dr . • Mr . • Mrs . • Ms . • Mx . • Prof .

DeclinedEventRelation

Represents event participants (invitees or attendees) with the status `Declined` for a given event. This object is available in API versions 29.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
EventId	Type reference Properties Filter, Group, Nillable, Sort Description Indicates the ID of the event. This is a relationship field. Relationship Name Event Relationship Type Lookup Refers To Event
RelationId	Type reference Properties Filter, Group, Nillable, Sort Description Indicates the ID of the invitee. This is a polymorphic relationship field. Relationship Name Relation Relationship Type Lookup Refers To Calendar, Contact, Lead, User
RespondedDate	Type dateTime Properties Filter, Nillable, Sort Description Indicates the most recent date and time when the invitee declined an invitation to the event.
Response	Type string

Field Name	Details
	Properties Filter, Group, Nillable, Sort
	Description Indicates the content of the response field. Label is Comment.
Type	Type string
	Properties Filter, Group, Nillable, Sort
	Description Indicates whether the invitee is a user, lead or contact, or resource.

Usage

Query invitees who have declined an invitation to an event

```
SELECT eventId, type, response FROM DeclinedEventRelation WHERE eventId='00UTD000000ZH5LA'
```

SEE ALSO:

[AcceptedEventRelation](#)

[UndecidedEventRelation](#)

DelegatedAccount

Represents the external managed account. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

You must have a Partner or Customer Community Plus license. You can't edit the visibility of DelegatedAccount metadata on user profiles.

Fields

Field	Details
AccessBuyFor	Type boolean

Field	Details
	Properties Create, Filter, Update Description The access that an admin authorizes for an external user to buy for other accounts. This field is available in API version 50.0 and later. A B2B Commerce license is required to use AccessBuyFor.
AccessManageUsers	Type boolean Properties Create, Filter, Update Description The access that an admin authorizes for an external user to manage external users on other accounts. This includes managing permission sets, membership, passwords, and activation. This field is available in API version 50.0 and later. Delegated External User Administrator permission is required to use AccessManageUsers.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
ManagedById	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the managing user. This is a relationship field. Relationship Name ManagedBy

Field	Details
	Relationship Type Lookup Refers To User
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the external managed account.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the record owner. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ParentId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the managing users account. This field is available in API version 50.0 and later. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To Account

Field	Details
TargetId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the account being managed. This is a relationship field. Relationship Name Target Relationship Type Lookup Refers To Account

DeleteEvent

Represents a record that has been soft deleted. Search on this object was available in API version 48.0, then removed in API version 50.0.

DeleteEvent is a read-only object. You can't create, update, or delete it directly. To create a DeleteEvent record, soft delete a record of another type, like an Account. To remove a DeleteEvent record, use the [emptyRecycleBin\(\)](#) API or hard delete the corresponding Record.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
DeletedById	Type reference Properties Filter, Group, Sort Description The ID of the user who deleted the record. This is a relationship field. Relationship Name DeletedBy Relationship Type Lookup

Field	Details
	Refers To User
DeletedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the record was deleted.
Record	Type string Properties Filter, Group, Nillable, Sort Description The ID of the record that was deleted.
RecordName	Type string Properties Filter, Group, Nillable, Sort Description The name of the record that was deleted.
SubjectName	Type string Properties Filter, Group, Nillable, Sort Description The type of record that was deleted, for example, Account.

DeliveryEstimationSetup

Shows the configuration options for the commerce delivery service offered through a web store or sales channel. Includes settings such as delivery location group, channel, fulfillment types, and default fulfillment time. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The DeliveryEstimationSetup object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
ChannelId	Type reference Properties Create, Filter, Group, Sort, Update Description ID for the web store or sales channel associated with the delivery estimation configuration.
DefaultBusinessHoursId	Type reference Properties Create, Filter, Group, Sort, Update Description ID for the default business hours. This is a relationship field. Relationship Name DefaultBusinessHours Refers To BusinessHours
DefaultPickupTime	Type time Properties Create, Filter, Sort, Update Description Default pickup time.
DefaultProcessingTime	Type int Properties Create, Filter, Group, Sort, Update Description Default processing time.
DefaultProcessingTimeUnit	Type picklist

Field	Details
	Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Default processing time unit. Possible values are: • Hours • Days • Weeks
ExternalReference	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Unique code, reference, or identifier for the delivery estimation configuration record used by external systems. Can be the name of the web store or sales channel associated with the configuration to ensure a unique ID within the organization. For example, <code>DefaultWebstore123</code>.
isEnabled	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the given delivery estimation configuration is active. The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the record was last modified. Its label in the user interface is <code>Last Modified Date</code>.
LastSyncedById	Type reference Properties Filter, Group, Nillable, Sort Description User ID of who performed the last sync for this delivery estimation configuration. This field is available in API version 62.0 and later.

Field	Details
	This is a relationship field. Relationship Name LastSyncedBy Refers To User
LastSyncedDate	Type dateTime Properties Filter, Nillable, Sort Description Date the delivery estimation configuration was last synced. This field is available in API version 62.0 and later.
LastSyncedMessage	Type textarea Properties Nillable Description Message that occurred during the last sync. This field is available in API version 62.0 and later.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Last time the delivery estimation configuration was viewed.
LocationGroupId	Type reference Properties Create, Filter, Group, Sort, Update Description Represents a group of Omnichannel Inventory locations. This is a relationship field. Relationship Name LocationGroup Refers To LocationGroup

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the delivery estimation setup configuration.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the user who currently owns this DeliveryEstimationSetup object. Default value is the user logged in to the API to perform the create. This is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
RoutingType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Determines an order's route and calculates delivery estimations. This field is available in API version 65.0 and later. Possible values are: • DRE • None • Standard The default value is None.
ServiceRegion	Type string Properties Filter, Group, Nillable, Sort Description An org's commerce delivery service provisioning region (North America, Europe, or Asia) that's set when Delivery Estimation is enabled in the Order Management app. It can't be

Field	Details
	changed. If the field is empty, provisioning hasn't occurred yet. Available in API version 63.0 and later.
SyncStatus	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Sync status of the delivery estimation setup configuration. Possible values are: • Deleting • Deprovisioned • Error • None • Synced • Syncing The default value is <code>NONE</code>. This field is available in API version 62.0 and later.

DigitalSignature

Represents a signature captured on a service report in field service.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
DigitalSignatureNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort

Field Name	Details
	Description An auto-generated number identifying the signature.
DocumentBody	Type base64 Properties Create Description The captured signature image.
DocumentContentType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The data type of the captured signature. Possible values are: • audio/acc • audio/amr • audio/ogg • video/3gpp2 • video/3gpp • image/avif • text/calendar • audio/x-caf • image/webp
DocumentLength	Type int Properties Filter, Group, Nillable, Sort Description The length of the captured signature.
DocumentName	Type string Properties Create, Filter, Group, Sort Description The name of the captured signature image.

Field Name	Details
ParentId	Type reference Properties Create, Filter, Group, Sort Description ID of the service appointment, work order, or work order line item that the service report is generated for. This is a polymorphic relationship field. Relationship Name Parent Relationship Type Lookup Refers To AuthorizationFormConsent, Order, ServiceAppointment, WorkOrder, WorkOrderLineItem
Place	Type string Properties Create, Filter, Group, Nillable, Sort Description The place where the report was signed.
SignatureType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort Description The role of the person signing the service report. Your org comes with one signature type, <code>Default</code>. A service report template can only contain one signature per type. If you plan to collect multiple signatures on service reports, create additional values for the Signature Type field. Create at least one value for every role that might need to sign a service report. For example, <code>Technician</code>, <code>Customer</code>, <code>Supervisor</code>, or <code>Supplier</code>. If some service reports will be signed by multiple people in one role—for example, all technicians present at an appointment—create numbered types: <code>Technician 1</code>, <code>Technician 2</code>, and so forth.  Note: You can create up to 1,000 signature types. You can't delete signature types, but you can deactivate them so they can't be used in service report templates. When you deactivate a type, it still appears on service report templates that used it, but you can't use it on new service report templates.

Field Name	Details
SignedBy	Type string Properties Create, Filter, Group, Nillable, Sort Description The name of the person signing.
SignedDate	Type dateTime Properties Create, Filter, Nillable, Sort Description The date and time of the signing.

Usage

Add signature blocks to service report templates to determine which signatures need to be gathered on reports that use the template. Service report templates can contain up to 20 signatures, and each signature must use a different Signature Type. For example, create a standard service report template that contains a customer signature and a technician signature.

To learn more about digital signatures, see [Guidelines for Using Signatures on Service Reports](#).

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

DigitalSignatureChangeEvent (Available in API version 57.0)

Change events are available for the object.

DigitalWallet

Represents a customer's digital wallet service. Salesforce Payments can use a digital wallet as a payment source when processing payments through a payment gateway. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access Salesforce Payments objects with the API, your org must have one or more of these licenses: Salesforce Payments, Salesforce Order Management, B2B Commerce, or D2C Commerce. Salesforce Payments objects are available only in Lightning Experience.

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The account of the customer owns the digital wallet. This field is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
AuditEmail	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description Email address of the digital wallet owner where audit information about payments gets sent. This field is available in API v49.0 and later. It doesn't appear in the UI by default for Salesforce orgs that upgraded from v48.0. Users must add it to the DigitalWallet page layout on their own.
BillingName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Billing name linked to customer's digital wallet. Available in API version 64.0 and later.
Comments	Type textarea Properties Create, Nillable, Update Description Users can provide additional details about the digital wallet. Supports a maximum of 1000 characters.

Field	Details
CompanyName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Company of the digital wallet owner.
Customer	Type string Properties Create, Filter, Group, Nillable, Sort Description Customer name of the digital wallet owner.
DigitalWalletNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description System-generated reference number for the digital wallet.
Email	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description Email of the digital wallet owner.
ExtendedPaymentMethodType	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Other digital payment methods used for the transaction. This field value is required when the value of the <code>PaymentMethodType</code> field is <code>extd_altrn_payment_method_type</code> or <code>extd_wallet</code>. This field is available in API version 66.0 and later.
GatewayToken	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description Unencrypted unique token ID generated by the payment gateway to represent the digital wallet during transactions. This field is available for backward compatibility. To secure the token, use the <code>GatewayTokenEncrypted</code> field. If you try to record a <code>GatewayToken</code> for a digital wallet that already has a <code>GatewayToken</code> or <code>GatewayTokenEncrypted</code> value, Salesforce throws an error.
<code>GatewayTokenDetails</code>	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Unique ID generated by the payment gateway for the card for future transactions.
<code>GatewayTokenEncrypted</code>	Type encryptedstring Properties Create, Nillable, Update Description Encrypted unique token ID generated by the payment gateway to represent the digital wallet during transactions. Encrypted using Salesforce Classic Encryption for custom fields. Available in API v52.0 and later.
<code>IpAddress</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The IP address of the digital wallet owner. This field is available in API v49.0 and later. It doesn't appear in the UI by default for Salesforce orgs that upgraded from v48.0. Users must add it to the DigitalWallet page layout on their own.
<code>IsAutoPayEnabled</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Indicates whether the payment method can be used for recurring payments (True) or not (False). The default value is False. This field is available in API v55.0 and later. For orgs that upgraded from v54.0, you must add this field to the Digital Wallet page layout in the UI. It isn't automatically added.

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible the user only referenced this record (LastReferencedDate) but not viewed it.
MacAddress	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The MAC address of the digital wallet owner. This field is available in API v49.0 and later. It doesn't appear in the UI by default for Salesforce orgs that upgraded from v48.0. Users must add it to the DigitalWallet page layout on their own.
NickName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description User-defined nickname for the digital wallet.
PaymentGatewayId	Type reference Properties Create, Filter, Group, Nillable, Sort Description Gateway used with transactions for the digital wallet. This field is a relationship field. Relationship Name PaymentGateway

Field	Details
	Relationship Type Lookup Refers To PaymentGateway
PaymentMethodAddress	Type address Properties Filter, Nillable Description Full address associated with the digital wallet payment method. For more information about address fields, see Address Compound Fields
PaymentMethodCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Part of the address for the payment method.
PaymentMethodCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Part of the address for the payment method.
PaymentMethodDetails	Type string Properties Create, Filter, Group, Nillable, Sort Description Optional information about the payment method type. This field is available in API version 57.0 and later.
PaymentMethodGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description Accuracy level of the geocode for the payment method address. An accuracy level contains information about the location of a latitude and longitude. For more information about geolocation fields, see Geolocation Compound Field. Possible values are: • Address • Block • City • County • ExtendedZip • NearAddress • Neighborhood • State • Street • Unknown • Zip
PaymentMethodLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Latitude of the payment method address. Used with the PaymentMethodLongitude to specify the precise geolocation of the address. For details on geolocation compound fields, see Compound Field Considerations and Limitations.
PaymentMethodLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Latitude of the payment method address. Used with the PaymentMethodLatitude to specify the precise geolocation of the address. For details on geolocation compound fields, see Compound Field Considerations and Limitations.
PaymentMethodPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Part of the address for the payment method.

Field	Details
PaymentMethodState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Part of the address for the payment method.
PaymentMethodStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Part of the address for the payment method.
PaymentMethodSubType	Type string Properties Create, Filter, Group, Nillable, Sort Description More information about the payment method. For example, if the PaymentMethodType is Visa, this field can be digital wallet. This field is available in API version 57.0 and later.
PaymentMethodType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Payment method used for the transaction. Possible values include credit cards such as Visa and American Express, digital wallets like Apple Pay and PayPal, direct debits such as ACH, BECS, Bacs, non-card payments methods such as EPS, SEPA, and iDEAL, extended alternate payments methods, and extended wallets. This field is available in API version 57.0 and later.
Phone	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description Phone number of the digital wallet owner. This field is available in API v49.0 and later. It doesn't appear in the UI by default for Salesforce orgs that upgraded from v48.0. Users must add it to the DigitalWallet page layout on their own.

Field	Details
ProcessingMode	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Defines whether the digital wallet is used for transactions made inside or outside the payment platform. Possible values are: • External—Transactions happened outside of the Salesforce payments platform. • Salesforce—Salesforce made and recorded an external call to the payment platform. This field is available in API v49.0 and later. It doesn't appear in the UI by default for Salesforce orgs that upgraded from v48.0. Users must add it to the DigitalWallet page layout on their own.  Important: ProcessingMode is required to create a DigitalWallet entity.
SavedPaymentMethodId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the saved payment method record. Relationship Name SavedPaymentMethod Relationship Type Lookup Refers To SavedPaymentMethod
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Defines the state of the digital wallet as a payment source. Possible values are: • Active—Customers can make payments with the digital wallet. • Canceled—The digital wallet can no longer be used for payments. This status can't be changed. • InActive—The digital wallet can't be used for payments until a user changes its status to Active.

DirectMessage

Represents a direct message conversation between multiple users in Chatter. This object is available in API version 38.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`, `update()`

Special Access Rules

You must have the Manage Chatter Messages and Direct Messages permission enabled to access the DirectMessage object.

Fields

Field	Details
Name	Type string Properties Filter, Group, idLookup, Sort, Update Description A default value that isn't visible to users.
Subject	Type string Properties Filter, Group, Nillable, Sort, Update Description Subject of the overall direct message conversation.

Usage

DirectMessage is an object used by Salesforce to control DirectMessage conversations. It represents a record of a direct message conversation, but doesn't include conversation data, such as posts or comments. It is most frequently used to moderate direct message data in order to meet data compliance regulations.

Division

A logical segment of your organization's data. For example, if your company is organized into different business units, you could create a division for each business unit, such as "North America," "Healthcare," or "Consulting." Available only if the organization has the Division permission enabled.

Supported Calls

`create()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

- Divisions must be enabled for your organization to access this object. To discover whether divisions have been enabled for an organization, inspect the User or Group object for the `DefaultDivision` field—if it is present, then divisions have been enabled, and this field (the field is named `Division` in objects other than User and Group) will be available in all relevant objects.
- Customer Portal users can't access this object.

Fields

Field	Details
<code>IsActive</code>	Type boolean Properties Create, Defaulted on create, Filter, Update Description Indicates whether the division is active (<code>true</code>) or not (<code>false</code>). Label is Active.
<code>IsGlobalDivision</code>	Type boolean Properties Defaulted on createFilter Description Indicates whether the division is your organization's global default division (<code>true</code>) or not (<code>false</code>). Label is Global Division.
<code>Name</code>	Type string Properties Create, Filter, Update Description A descriptive name for the division. Limit: 80 characters.
<code>SortOrder</code>	Type int Properties Create, Filter, Nillable, Update Description The order in which this division name appears in the Division picklist field when creating or editing users in the Salesforce user interface.

Usage

The values available for that field are the global division ID for the organization, created when divisions are first enabled, and any other division IDs that have been created. The division ID associated with a user is populated in the objects owned or created by the user.

You can use the division ID to make searches, reports, and list views run more quickly and return more relevant results if an organization has very large data sets. For more information, see the Salesforce online help, in the Fields description for the object.

You can use WITH in SOSL to pre-filter results based on division. This is faster than specifying the division in a WHERE clause.

 **Note:** The User object has a `Division` field that is unrelated to this object. The `Division` field is a standard text field similar to Company or Department that has no special properties. Do not confuse it with the `DefaultDivision` field, which does relate to this object.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

DivisionLocalization

When the Translation Workbench is enabled for your organization, the DivisionLocalization object provides the translation of the label for a division.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

- Your organization must be using Professional, Enterprise, Developer, Unlimited, or Performance Edition and be enabled for the Translation Workbench.
- To view this object, you must have the “View Setup and Configuration” permission.

Fields

Field	Details
Language	Typestring PropertiesCreate, Filter, Nillable, Restricted picklist DescriptionThe language for this translated label.
NamespacePrefix	Typestring

Field	Details
	Properties Filter, Nillable Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
ParentId	Type reference Properties Create, Filter, Nillable Description The ID of the Division associated with the label that is being translated.
Value	Type string Properties Create, Filter, Nillable, Update Description The actual translated label for the division. Label is Translation.

Usage

Use this object to translate the labels of your divisions into the different languages supported by Salesforce.

DocAtchDownloadEventLog

Document Attachment Downloads events contain details of document and attachment downloads. This object is available in API version 65.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
<code>FileType</code>	Type string Properties Filter, Group, Nillable, Sort Description The type of the file or attachment.
<code>ObjectIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the object that's associated with the document or attachment.
<code>RequestIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID..
<code>Timestamp</code>	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT.
<code>UserIdentifier</code>	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort
	Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943

Document

Represents a file that a user has uploaded. Unlike Attachment records, documents are not attached to a parent object.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You must have the "Edit" permission on documents and the appropriate access to the Folder that contains a document in order to create or update a document in that Folder.

Fields

Field	Details
AuthorId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description ID of the User who is responsible for the Document. This is a relationship field.
	Relationship Name Author
	Relationship Type Lookup
	Refers To User
Body	Type base64

Field	Details
	Properties Create, Nillable, Update Description Required. Encoded file data. If specified, then do not specify a URL.
BodyLength	Type int Properties Filter, Group, Sort Description Size of the file (in bytes).
ContentType	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Type of content. Label is Mime Type. Limit: 120 characters. If the Don't allow HTML uploads as attachments or document records security setting is enabled for your organization, you cannot upload files with the following file extensions: .htm, .html, .htt, .htx, .mhtm, .mhtml, .shtm, .shtml, .acgi, .svg.
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Text description of the Document. Limit: 255 characters.
DeveloperName	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Label is Document Unique Name.

Field	Details
	 Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance may slow while Salesforce generates one for each record.
FolderId	Type reference Properties Create, Filter, Group, Sort, Update Description Required. ID of the Folder that contains the document. This is a relationship field. Relationship Name Folder Relationship Type Lookup Refers To Folder, User
IsBodySearchable	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the contents of the object can be searched using a SOSL <code>FIND</code> call. The <code>ALL FIELDS</code> search group includes the content as a searchable field.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
IsInternalUseOnly	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the object is only available for internal use (<code>true</code>) or not (<code>false</code>). Label is Internal Use Only.

Field	Details
IsPublic	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the object is available for external use (<code>true</code>) or not (<code>false</code>). Label is Externally Available.
Keywords	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Keywords. Limit: 255 characters.
LastReferencedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Name of the document. Label is Document Name.
NamespacePrefix	Type string Properties Filter, Group, Sort, Nillable

Field	Details
	Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. - In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. - In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
Type	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description File type of the Document. In general, the values match the file extension for the type of Document (such as pdf or jpg). Label is File Extension.
Url	Type string Properties Create, Filter, Nillable, Group, Sort, Update Description URL reference to the file (instead of storing it in the database). If specified, do not specify the <code>Body</code> or <code>BodyLength</code>.

Usage

When creating or updating a document, you can specify a value in either the `Body` or `Url` fields, but not both.

Encoded Data

The API sends and receives the binary file data encoded as a base64 data type. Prior to creating a record, clients must encode the binary file data as base64. Upon receiving an API response, clients must decode the base64 data to binary (this conversion is usually handled for you by the SOAP client).

Maximum Document Size

You can only create or update documents to a maximum size of 5 MB.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

DocumentAttachmentMap

Maps the relationship between an EmailTemplate and its attachment, which is stored as a Document.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
<code>DocumentId</code>	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the document that this object tracks.
<code>DocumentSequence</code>	Type int Properties Create, Filter, Group, Sort, Update Description Represents the order that the attachments will be included in the email defined by the EmailTemplate specified by the <code>DocumentId</code>. Label is Attachment Sequence. The first attachment is given a value of 0, and each subsequent attachment is given a value incremented by 1.
<code>ParentId</code>	Type reference Properties Create, Filter, Group, Sort, Update

Field	Details
	Description ID of the EmailTemplate parent. The attachment identified by <code>DocumentId</code> is attached to the EmailTemplate specified in this field.

Usage

Use this object to map the relationship of an EmailTemplate to its attachments, and to specify the order of the attachments.

SEE ALSO:

[EmailTemplate](#)

DocumentRecipient

Connects a Service Report to a Digital Signature. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
<code>DigitalSignatureId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Digital Signature to be used on the Service Report. This field is a relationship field. Relationship Name DigitalSignature Relationship Type Lookup Refers To DigitalSignature
<code>DigitalSignatureUrl</code>	Type textarea

Field	Details
	Properties Create, Nillable, Update Description Link to request signature from Experience Cloud site.
DocumentId	Type reference Properties Create, Filter, Group, Sort, Update Description The document sent to the recipient. This field is a polymorphic relationship field. Relationship Name Document Relationship Type Lookup Refers To ServiceReport
DocumentRecipient	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Number automatically assigned to a new record.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of this object. ID of the creator of this object. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
QuoteDocumentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The quote document sent to the recipient. This field is a relationship field. Relationship Name QuoteDocument Refers To QuoteDocument
RecipientId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The recipient to sign the document. This field is a polymorphic relationship field. Relationship Name Recipient

Field	Details
	Relationship Type Lookup Refers To Contact, User
SignatureIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A unique identifier that associates DocumentRecipient with a signature Lightning web component (LWC) on the report page layout, telling you where on the report the signature goes.
SignatureStatus	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The status of the signature. The default value is Completed. Possible values are: - Completed - Skipped
SignatureStatusReason	Type textarea Properties Create, Filter, Nillable, Sort, Update Description An explanation for the signature status. For example, a reason why the signature was skipped.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The status of the document recipient record. Possible values are: - Completed - Declined - Delivered - None

Field	Details
	• Sent The default value is None.
StatusReason	Type textarea Properties Create, Nillable, Update Description The final status reason.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[DocumentRecipientFeed](#) on page 55

Feed tracking is available for the object.

[DocumentRecipientOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[DocumentRecipientShare](#) on page 67

Sharing is available for the object.

DocumentTag

Associates a word or short phrase with a Document.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
ItemId	Type reference Properties Create, Filter Description ID of the tagged item.

Field Name	Details
Name	Type string Properties Create, Filter Description Name of the tag. If this value does not already exist, a new TagDefinition is created and becomes the parent of this Tag object. Otherwise, a TagDefinition with the same name becomes the parent of this Tag object. Parent relationships are created automatically.
TagDefinitionId	Type reference Properties Filter Description ID of the parent TagDefinition object that owns the tag.
Type	Type picklist Properties Create, Filter, Restricted picklist Description Defines the visibility of a tag. Valid values: • Public—The tag can be viewed and manipulated by all users in an organization. • Personal—The tag can be viewed or manipulated only by a user with a matching OwnerId.

Usage

DocumentTag stores the relationship between its parent TagDefinition and the Document being tagged. Tag objects act as metadata, allowing users to describe and organize their data.

When a tag is deleted, its parent TagDefinition will also be deleted if the name is not being used; otherwise, the parent remains. Deleting a TagDefinition sends it to the Recycle Bin, along with any associated tag entries.

Domain

Read-only object that represents a custom Web address assigned to a site in your organization. This object is available in API version 26.0 and later.

To access this object, Salesforce Sites, Digital Experiences, or Site.com must be enabled for your organization. **DomainSite** contains records for domains that serve your Experience Cloud sites only when enhanced domains are deployed. The system-managed site

hostnames for those Experience Cloud sites end in `.my.site.com`. This object doesn't contain records for legacy domains that serve Experience Cloud sites with hostnames that end in `.force.com`.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

- Customer Portal users can't access this object.
- To view this object, you must have either the View Setup and Configuration or Manage Custom Domains permission.
- Site.com Publisher users have read-only API access to the Domain and [DomainSite](#) objects.

Fields

Field	Description
CnameTarget	Type string Properties Filter, Nillable, Sort Description The canonical name (CNAME) of the external host or server. If you use a custom domain with a non-Salesforce provider, such as your own external server or CDN provider, to serve your domain, this field points to the CNAME of the external provider. This field is available in API version 43.0 and later.
Domain	Type string Properties Filter, idLookup, Sort Description The branded custom Web address within the global namespace identified by this domain's type. In the Domain Name System (DNS) global namespace, this field is the custom Web address that you registered with a third-party domain name registrar. The custom Web address can be used to access the site of this domain.
DomainType	Type picklist Properties Filter, Group, Restricted picklist, Sort

Field	Description
	Description The global namespace that this custom Web address belongs to. This value is set to DNS for custom Web addresses in the global DNS. DomainType can have the following value: • DNS—Domain Name System (DNS)
HttpsOption	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Current HTTPS option. Values include: • CdnPartner—Salesforce serves the custom domain, such as <code>https://www.example.com</code>, with the Salesforce Content Delivery Network (CDN) partner. • Community—The system-managed Experience Cloud sites domain that ends in <code>.force.com</code>. This option applies only to orgs without enhanced domains. • CommunityAlt—The system-managed Experience Cloud sites domain that ends in <code>.my.site.com</code>. This option applies only to orgs with enhanced domains. • ExternalHttps—An external service or CDN serves the custom domain, such as <code>https://www.example.com</code>. • LegacyDomain—A previous system-managed domain for this org. This option is rarely used. • NoHttps—Salesforce serves the custom domain, such as <code>http://www.example.com</code>, via HTTP. Used to configure your custom domain before selecting a permanent HTTPS option. • OrgDomain—The system-managed My Domain login URL for this org. • Sites—The system-managed Salesforce Sites domain that ends in <code>.force.com</code>. This option applies only to orgs without enhanced domains. • SitesAlt—The system-managed Salesforce Sites domain that ends in <code>.my.salesforce-sites.com</code>. This option applies only to orgs with enhanced domains. • SitesRuntime—Salesforce serves the custom domain, such as <code>https://www.example.com</code>, using your HTTPS certificate on Salesforce servers. This field is available in API version 47.0 and higher. To get the current system-managed domains for your org, use the Domain Apex class.

Field	Description
OptionsHstsPreload	Type boolean Properties Filter Description Indicates whether the <code>preload</code> directive is added to the HSTS header so that the domain is eligible for HSTS preloading registration (<code>true</code>) or not (<code>false</code>). This field is available in API version 52.0 and later. After this field is set to <code>true</code>, to ensure that HTTPS connections are always used in browsers that support HSTS, you must also register the domain at https://hstspreload.org. We only modify the HSTS headers of domains that are eligible for registration. Domain names can consist of a public suffix plus one additional label. For more information, see Add a Domain in Salesforce Help.

Usage

Use this read-only object to query the domains that are associated with each site in your organization.

DomainSite

Read-only junction object that joins the Site and Domain objects. This object is available in API version 26.0 and later.

To access this object, Salesforce Sites, Digital Experiences, or Site.com must be enabled. `DomainSite` contains records for domains that serve your Experience Cloud sites only when enhanced domains are deployed. The system-managed site hostnames for those Experience Cloud sites end in `.my.site.com`. This object doesn't contain records for legacy domains that serve Experience Cloud sites with hostnames that end in `.force.com`.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

- Customer Portal users can't access this object.
- To view this object, you must have either the View Setup and Configuration or Manage Custom Domains permission.
- Site.com Publisher users have read-only API access to the [Domain](#) and `DomainSite` objects.

Fields

Field	Description
DomainId	Type reference Properties Filter, Group, Sort Description The ID of the associated Domain. This is a relationship field. Relationship Name Domain Relationship Type Lookup Refers To Domain
PathPrefix	Type string Properties Filter, Group, Sort Description Shows where a site's root exists on a domain. Can only be set for custom Web addresses. Always begins with a /.
SiteId	Type reference Properties Filter, Group, Sort Description The ID of the associated Site. This is a relationship field. Relationship Name Site Relationship Type Lookup Refers To Site

Usage

Use this read-only object to query or retrieve information about your sites.

DsarPolicy

Represents a Data Subject Access Request (DSAR) policy created in the Privacy Center managed package. DSAR policies anonymize or transfer personal data from your org at your customer’s request. This object is available in API version 50.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

This object is for Privacy Center customers with the `ReadAllData` or `PrivacyDataAccess` permissions.

Fields

Field	Details
Description	Type textarea Properties Filter, Group, Nillable, Sort Description Description of the policy. The description is limited to 255 characters.
DeveloperName	Type string Properties Filter, Group, Sort Description Developer name of the policy.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Indicates whether this policy can be used (<code>true</code>) or not (<code>false</code>) for data subject (customer) requests. The default value is <code>false</code>.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language of the MasterLabel. Possible values are: • <code>da</code>—Danish • <code>de</code>—German • <code>en_US</code>—English • <code>es</code>—Spanish • <code>es_MX</code>—Spanish (Mexico) • <code>fi</code>—Finnish • <code>fr</code>—French • <code>it</code>—Italian • <code>ja</code>—Japanese • <code>ko</code>—Korean • <code>nl_NL</code>—Dutch • <code>no</code>—Norwegian • <code>pt_BR</code>—Portuguese (Brazil) • <code>ru</code>—Russian • <code>sv</code>—Swedish • <code>th</code>—Thai • <code>zh_CN</code>—Chinese (Simplified) • <code>zh_TW</code>—Chinese (Traditional)
MasterLabel	Type string Properties Filter, Group, Sort Description Label of the policy.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as the object.

DsarPolicyLog

Sharing is available for the object.

DsarPolicyLog

Represents the history of Data Subject Access Request (DSAR) policy execution requests. This log records the status and results of executed DSAR policies for a customer. This object is available in API version 50.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

This object is for Privacy Center customers with the `ReadAllData` or `PrivacyDataAccess` permissions.

Fields

Field	Details
CompletionDateTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the data subject access request was completed. Available in API version 51.0 and later.
DataSubjectId	Type reference Properties Filter, Group, Nillable, Sort Description The 15–18 character ID of the data subject making the request. Available in API version 51.0 and later.
DeletedDateTime	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The date and time when the file generated for the data subject's request is deleted. Available in API version 51.0 and later.
DeveloperName	Type string Properties Filter, Group, Sort Description Developer name of the policy.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
DownloadedDateTime	Type dateTime Properties Filter, Nillable, Sort Description The most recent date and time when the data subject downloaded the file generated at their request. Available in API version 51.0 and later.
DsarError	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Represents an error in generating the file for the data subject access request. Available in API version 51.0 and later.
DsarPolicyId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the DSAR policy.
FileURL	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The result of the DSAR policy execution. The URL links to a downloadable file that contains the customer data.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language of the MasterLabel. Possible values are: • da—Danish • de—German • en_US—English • es—Spanish • es_MX—Spanish (Mexico) • fi—Finnish • fr—French • it—Italian • ja—Japanese • ko—Korean • nl_NL—Dutch • no—Norwegian • pt_BR—Portuguese (Brazil) • ru—Russian • sv—Swedish • th—Thai • zh_CN—Chinese (Simplified) • zh_TW—Chinese (Traditional)
MasterLabel	Type string Properties Filter, Group, Sort Description Label of the policy.
RequestDateTime	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort
	Description The date and time when a data subject requested access to their data in the org. Available in API version 51.0 and later.
RequestStatus	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description The status of the policy execution. Possible values are: • Complete • Deleted • Downloaded • Expired • Failed • In Progress
RequestUserId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description The ID of the org employee or admin making the request on behalf of the data subject. Available in API version 51.0 and later.

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as the object.

[DsarPolicy](#)

Sharing is available for the object.

DuplicateJob

Represents an instance of a job that identifies duplicates among existing records in the system.

This object is available in API versions 42.0 and later.

A duplicate job is the parent of the DuplicateRecordSet instances that it generates. The duplicate record items in a set generated by a duplicate job are of one object type.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Special Access Rules

As of Summer '20 and later, only users with the View Setup and Configuration permission can access this object.

Fields

Field Name	Details
<code>DuplicateJobDefinitionId</code>	Type reference Properties Filter, Group, Sort, Update Description The ID of the corresponding duplicate job definition.
<code>DuplicateJobStatus</code>	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The current status of a duplicate job. Valid values are <code>Not Started</code> , <code>In Progress</code> , <code>Completed</code> , <code>Canceled</code> , <code>Failed</code> , <code>Results Deleted</code> .
<code>EndTime</code>	Type dateTime Properties Filter, Nillable, Sort Description The date and time when a duplicate job was completed.
<code>LastReferencedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The date when a duplicate job was last referenced.
<code>LastViewedDate</code>	Type dateTime

Field Name	Details
	Properties Filter, Nillable, Sort Description The date when a duplicate job was last viewed.
Name	Type string Properties Filter, Group, idLookup, Sort, Update Description The name of a duplicate job.
NumDuplicateRecordItems	Type int Properties Filter, Group, Sort Description The total number of duplicate records identified as a result of invoking a duplicate job.
NumDuplicateRecordSets	Type int Properties Filter, Group, Sort Description The number of duplicate record sets identified as a result of invoking a duplicate job.
NumRecordsScanned	Type int Properties Filter, Group, Sort Description The number of records scanned as a result of invoking a duplicate job.
ResultListViewId	Type reference Properties Filter, Group, Nillable, Sort, Update Description List view metadata for displaying the duplicate record sets identified as result of invoking a duplicate job.

Field Name	Details
StartDateTime	Type dateTime Properties Filter, Sort Description The date and time when a duplicate job was invoked.

DuplicateJobDefinition

Setup object defining a job that identifies duplicate record items globally.

This object is available in API versions 42.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

As of Summer '20 and later, only users with the View Setup and Configuration permission can access this object.

Fields

Field Name	Details
DeveloperName	Type string Properties Filter, Group, Sort Description The name of the user who created a duplicate job.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language in the user's personal settings.

Field Name	Details
MasterLabel	Type string Properties Filter, Group, Sort Description The label of the duplicate job.
SubjectSubtype	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The object subtype. Valid values are <code>Person</code> <code>Account</code> or <code>None</code> .
SubjectType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The object type: account, contact, or lead.

DuplicateJobMatchingRule

Represents a MatchingRule to be used with a DuplicateJob sharing the corresponding DuplicateJobMatchingRuleDefinition.

This object is available in API versions 42.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

As of Summer '20 and later, only users with the View Setup and Configuration permission can access this object.

Fields

Field Name	Details
DuplicateJobId	Type reference

Field Name	Details
	Properties Filter, Group, Sort Description The ID of the corresponding DuplicateJob.
DuplicateJobMatchRuleDefId	Type reference Properties Filter, Group, Sort Description The ID of the matching rule defined for the corresponding DuplicateJobMatchingRuleDefinition.
MatchingRuleBooleanFilter	Type textarea Properties Filter, Sort Description Boolean logic of the MatchingRule for this DuplicateJobMatchingRule.
MatchingRuleDescription	Type textarea Properties Filter, Group, Nillable, Sort Description Description of the matching rule for this DuplicateJobMatchingRule.
MatchingRuleName	Type string Properties Filter, Group, Sort Description The name of the matching rule defined for this particular DuplicateJob invocation.

DuplicateJobMatchingRuleDefinition

Setup object specifying a MatchingRule to use with DuplicateJob instances that share a DuplicateJobDefinition.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

This object is available in API versions 42.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `search()`

Special Access Rules

As of Summer '20 and later, only users with the View Setup and Configuration permission can access this object.

Fields

Field Name	Details
<code>DuplicateJobDefinitionId</code>	Type reference Properties Filter, Group, Sort Description ID of DuplicateJobDefinition (master) for this DuplicateJobMatchingRuleDefinition (detail).
<code>MatchingRuleId</code>	Type reference Properties Filter, Group, Nillable, Sort Description ID of the MatchingRule to be used with this DuplicateJobMatchingRuleDefinition.

DuplicateRecordItem

Represents a record that's been identified as a duplicate. DuplicateRecordItems are included in a DuplicateRecordSet, which are processed in duplicate jobs. Use this object to create custom report types for duplicates.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access this object, enable Duplicate Management. A Salesforce admin can grant access to any user with a Sales Cloud or CRM user license.

Fields

Field Name	Details
DuplicateRecordSetId	Type reference Properties Create, Filter, Group, Sort Description The duplicate record set that the duplicate record item is assigned to. This is a relationship field. Relationship Name DuplicateRecordSet Relationship Type Lookup Refers To DuplicateRecordSet
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The autogenerated name that's given to the Duplicate Record Item. Label is Duplicate Record Item Name.
RecordId	Type reference Properties Create, Filter, Group, Sort, Update Description The name of the record as it appears on the record's detail page. This is a polymorphic relationship field. Relationship Name Record Relationship Type Lookup Refers To Account, Contact, Individual, Lead

DuplicateRecordSet

Represents a group of records that have been identified as duplicates. Each duplicate record set contains one or more duplicate record items. Use this object to create custom report types and view the results of duplicate jobs.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access this object, activate duplicate rules. A Salesforce admin must give users read and write access.

Fields

Field Name	Details
DuplicateRuleId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The duplicate rule used to identify this list of duplicate records. Label Duplicate Rule ID This is a relationship field. Relationship Name DuplicateRule Relationship Type Lookup Refers To DuplicateRule
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.

Field Name	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The autogenerated name that's given to the duplicate record set. Label is <code>Duplicate Record Set Name</code>.
RecordCount	Type int Properties Filter, Group, Nillable, Sort Description The number of record items in the set.
ParentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The <code>ParentId</code> represents the parent of a duplicate rule or duplicate job. A <code>ParentId</code> is polymorphic. The label is Parent. This field is available in API versions 42.0 and later.

DuplicateRule

Represents a duplicate rule for detecting duplicate records.

Supported Calls

`describeSObjects()`, `describeLayout()`, `query()`, `retrieve()`, `search()`

Special Access Rules

As of Summer '20 and later, only users with the View Setup and Configuration permission can access this object.

Fields

Field Name	Details
DeveloperName	Type string Properties Filter, Group, Sort Description The developer name for the duplicate rule.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a duplicate rule is active (<code>true</code>) or not (<code>false</code>). This field is read only.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language for the duplicate rule.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. This field is available in API version 41.0 or later.
MasterLabel	Type string Properties Filter, Group, Sort

Field Name	Details
	Description The label for the duplicate rule.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, NamespacePrefix is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, NamespacePrefix is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
SubjectSubtype	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The subtype of object the duplicate rule is defined for. This field is available in API version 39.0 or later. Possible values are: • None • PersonAccount The default value is None.
sObjectType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of object the duplicate rule is defined for. Possible values are:

Field Name	Details
	- Account - Contact - Individual - Lead

Usage

You can use the API to view a duplicate rule's details. To create, edit, or delete duplicate rules, use the UI.

Use DuplicateRule to get the sObject type.

DuplicateRule is unavailable in some orgs.

DynamicDataCapture

DynamicDataCapture is a junction object that adds a Form tab to Work Order Overview, and to the related list of a work order, work order line item, or service appointment in the Field Service mobile app. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ActionDefinition	Type string Properties Create, Filter, Group, Sort, Update Description The associated Data Capture Flow to execute.
ActionType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of platform action that the form is associated with. Possible values are: Possible values are: Flow

Field	Details
	The default value is Flow.
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the form.
ExecutionOrder	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The order in which the Data Capture flow is executed. Positive integer values or null are supported.
IsRequired	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Boolean value that specifies if this form needs to be completed before moving on to the next form.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The order in which the Data Capture flow is executed. Positive integer values or null are supported.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the form.
OwnerId	Type reference

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID that refers to user who owns the Dynamic Data Capture object. This field is a polymorphic relationship field. Relationship Name Owner Refers To ServiceAppointment, WorkOrder, WorkOrderLineItem (the parent object), Timesheet
ParentRecordId	Type reference Properties Create, Filter, Group, Sort Description The ID that refers to a work order, work order line item, or service appointment that serves as the parent record for junction object. This field is a polymorphic relationship field. Relationship Name ParentRecord Relationship Type Parent-child Refers To ServiceAppointment, WorkOrder, WorkOrderLineItem (the parent object)
ParentRecordType	Type string Properties Filter, Group, Nillable, Sort Description The type of parent object associated with the junction object. Possible values are: • Work Order • Work Order Line Item • Service Appointment
PausedFlowInterviewId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The ID of the flow interview that has been paused by a user. This field is a relationship field. Relationship Name PausedFlowInterview Refers To FlowInterview
ProcessType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The flow process type for the form. Possible values are: • DataCaptureFlow—Data Capture Flow The default value is DataCaptureFlow.
ServiceDocumentTemplate	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description
ServiceReportLanguage	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description
StatusCategory	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The category that each status value belongs to. Possible values are: • Completed • InProgress—In Progress • New

Field	Details
	• NotApplicable—Not Applicable • Paused The default value is New.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

DynamicDataCaptureChangeEvent on page 68(API Version 64.0)

Change events are available for the object.

DynamicDataCaptureOwnerSharingRule on page 65(API Version 64.0)

Sharing rules are available for the object.

DynamicDataCaptureShare on page 67(API Version 64.0)

Sharing is available for the object.

ElectronicMediaGroup

Represents the type of media that you can associate with a product or category.This object is available in API version 49.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

You must have the B2B Commerce license and a CMS workspace to access a web store.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The default value is USD.
Description	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description Description of the store.
DeveloperName	Type string Properties Filter, Group, Sort Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Filter, Group, idLookup, Sort Description Name of the media group.
OwnerId	Type reference

Field	Details
	Properties Filter, Group, Sort Description The ID of the owner of the ElectronicMediaGroup object. For external routing, allows the object to be used in the Streaming API to listen to events whenever a ElectronicMediaGroup record is created, modified, or deleted.
UsageType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Possible values are: • Attachment • Banner • Listing • Standard • Tile

ElectronicMediaUse

Represents the usage of media. This object is available in API version 49.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

You must have the B2B Commerce license and a CMS workspace to access a web store.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort

Field	Details
	Description The default value is <code>USD</code> . Possible values are: • <code>USD</code>—U.S. Dollar
<code>ElectronicMediaGroupId</code>	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the electronic media group.
<code>ElectronicMediaId</code>	Type reference Properties Filter, Group, Sort Description The ID of the electronic media.
<code>ImplementorType</code>	Type string Properties Filter, Group, Nillable, Sort Description The type of implementor. Available implementors of <code>ElectronicMediaUse</code> include: • <code>ProductMedia</code> • <code>ProductCategoryMedia</code>
<code>SortOrder</code>	Type int Properties Filter, Group, Nillable, Sort Description The order that electronic media is displayed in.

EmailContent

Represents a marketing email asset for use with Account Engagement. This object is available in API version 50.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

EmailContent is only available for orgs that use Account Engagement. The Manage Email Content user permission is required. Users also need the CRM User, Sales, or Service User permission set. EmailContent isn't available for custom portal or guest users.

Fields

Field	Details
ClickThroughRate	Type percent Properties Filter, Nillable, Sort Description The percentage of visitors who click links contained in emails delivered (sent minus bounces) to them. Multiple clicks for a same link are counted.
ClickToOpenRatio	Type percent Properties Filter, Nillable, Sort Description The number of unique clicks divided by unique HTML opens.
DeliveryRate	Type percent Properties Filter, Nillable, Sort Description The percentage of the emails that were delivered compared to the number that bounced (soft and hard). Note: this data includes emails that were delivered to the recipient's spam folder.
Description	Type textarea Properties Create, Nillable, Update Description Description of the email content, for example, Promotion Mass Mailing.

Field	Details
HtmlBody	Type textarea Properties Nillable Description The body of the email in HTML format. The field is read-only.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp that indicates when the current user last viewed the record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, the record could have been referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the email asset.
OpenRate	Type percent Properties Filter, Nillable, Sort Description The percentage of unique HTML opens compared to the total number of emails delivered (sent minus bounces).
OptOutRate	Type percent Properties Filter, Nillable, Sort

Field	Details
	Description The percentage of users that have opted out compared to the total number of emails sent.
SpamComplaintRate	Type percent Properties Filter, Nillable, Sort Description The percentage of spam complaints compared to the total number emails sent.
Subject	Type textarea Properties Create, Filter, Nillable, Update Description Content of the subject line.
TemplateId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The Email Template field is mostly read-only. You can populate the Email Template field only during record create to prevent overwriting data on the email content record.
TextBody	Type textarea Properties Create, Nillable, Update Description The body of the email in plain text format. The character limit is 384, 000.
TotalDelivered	Type int Properties Filter, Group, Nillable, Sort Description The total number of emails minus hard and soft bounces. Note: this data includes emails that were delivered to the recipient's spam folder.
TotalHardBounced	Type int

Field	Details
	Properties Defaulted on create, Filter, Group, Nillable, Sort Description The total number of emails that permanently returned to the sender because the address is invalid. A hard bounce can occur because the domain name doesn't exist or because the recipient is unknown.
TotalOpens	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The total number of times a prospect's email client loaded the images in the HTML version of the email. We also record an open if the prospect clicks a link within the HTML or text email without downloading images. A click indicates that they viewed the message. Some email clients (Outlook, Apple Mail, Thunderbird) do not display images by default. Account Engagement counts an open each time the images load.
TotalSent	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description Read-only field. The total number of list emails sent, including bounced, opted-out, and invalid To: addresses.
TotalSoftBounced	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description Read-only field. The total number of times a recipient's mail server acknowledged the email, but returned it to the sender. Sometimes it is because the recipient's mailbox is full or the mail server is temporarily unavailable. After 5 soft bounces, Account Engagement opts the prospect out of emails.
TotalSpamComplaints	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description Read-only field. The total number of prospects that reported the email as spam.

Field	Details
TotalTrackedLinkClicks	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description Read-only field. The number of times prospects clicked a link in the email.
UniqueClickThroughRate	Type percent Properties Filter, Nillable, Sort Description Read-only field. The percentage of visitors who clicked a link contained in an email
UniqueOpens	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description Read-only field. The number of prospects who loaded the images in the HTML version of the email. The Unique Opens category counts each recipient only one time, even if the prospect loaded images more than once.
UniqueOptOuts	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description Read-only field. The total number of prospects that have clicked the link to unsubscribe or opted out of all emails in the Email Preference Center. They are removed from future email sends.
UniqueTrackedLinkClicks	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description Read-only field. The number of times a prospect clicked a link in the email. This metric doesn't include multiple clicks of the same link.

EmailDomainFilter

Represents a filter that determines whether an email relay is restricted to a specific list of domains. This object is available in API version 43.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

You must have the “Email Administration,” “Customize Application,” and “View Setup” user permissions to use this object.

You must create an email relay in Setup or through the [EmailRelay](#) object before you can use the `EmailDomainFilter` object.

Fields

Field Name	Details
EmailRelayId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the EmailRelay record. This is a relationship field. Relationship Name EmailRelay Relationship Type Lookup Refers To EmailRelay
FromDomain	Type textarea Properties Create, Nillable, Update Description Restricts the email relay to send emails based on the sender domains (<code>FromDomain</code>) listed in this field. This field is optional, accepts a list of comma-separated values, and supports the wildcard character.
IsActive	Type boolean

Field Name	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the email domain filter is active (<code>true</code>) or not (<code>false</code>). Use this field to enable or disable the email domain filter.
PriorityNumber	Type int Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description Indicates the order in which the email domain filter is processed. Filters are evaluated in ascending order. The priority number must be unique. If this field is left blank, it is assigned the next available number and is processed last. Processing stops after the first matching filter is applied.
ToDomain	Type textarea Properties Create, Nillable, Update Description Restricts the email relay to send emails based on the recipient domains (<code>ToDomain</code>) listed in this field. This field is optional, accepts a list of comma-separated values, and supports the wildcard character.

Usage



Tip: If you also plan to activate Bounce Management and Email Compliance Management, confirm with your email admin that your company allows relaying email sent from Salesforce. For more information on bounce management, see [Configure Deliverability Settings for Emails Sent from Salesforce](#).

EmailDomainKey

Represents a domain key for an organization's domain, used to authenticate outbound email that Salesforce sends on the organization's behalf. This object is available in API version 28.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, only authenticated internal and external users can access this object.

We've upgraded and replaced the original DKIM (DomainKeys Identified Mail) key feature, so that you can create a DKIM key with increased email security. For more information, see [Setting Up More Secure DKIM Keys](#).

Fields

Field Name	Details
AlternatePublicKey	Type textarea Properties Nillable Description Read-only. Alternate public keys are used by Salesforce to auto-rotate domain keys. This field is available in API version 44.0 and later after activating the Critical Update.
AlternateSelector	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The text used to distinguish the DKIM key from any other DKIM keys your organization uses for the specified domain. This field is available in API version 44.0 and later after activating the Critical Update.
AlternateTxtRecordName	Type string Properties Filter, Group, Nillable, Sort Description The alternate TXT record name is used to create the CNAME record. Refer to the Usage section for more information. This field is available in API version 44.0 and later after activating the Critical Update.
Domain	Type string Properties Create, Filter, Group, Sort, Update Description The organization's domain name that the DKIM key is generated for.

Field Name	Details
DomainMatch	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The specificity of match required on the sending domain name before signing with this DKIM key. Valid values are: • <code>DomainOnly</code>—Sign if sending domain matches at the domain level only (example.com but not mail.example.com) • <code>SubdomainsOnly</code>—Sign if sending domain matches at the subdomain level only (mail.example.com but not example.com) • <code>DomainAndSubdomains</code>—Sign if sending domain matches at the domain and subdomain levels (example.com and mail.example.com)
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this DKIM key is active (<code>true</code>) or not (<code>false</code>).
KeySize	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort Description Indicates the RSA key size, in bits. The possible values are: • 1024 • 2048 This field is available in API version 45.0 and later.
PrivateKey	Type textarea Properties Create, Nillable, Update Description Once you activate the Critical Update, this field is no longer visible. The private portion of the DKIM key pair used to encrypt mail headers from your domain. Salesforce generates an encrypted <code>PrivateKey</code> if you don't specify

Field Name	Details
	a value when creating the DKIM key. If you do specify a value, it must be an existing valid <code>PrivateKey</code> from another EmailDomainKey object. This field doesn't contain the actual private key, but a value that represents the key in our system. Therefore: - The actual private key can't be leaked. - You can't use the value to do your own email signing.
PublicKey	Type textarea Properties Create, Nillable, Update Description Part of the domain key pair that mail recipients retrieve to decrypt the DKIM header and verify your domain. Add the <code>PublicKey</code> value to your domain's DNS records before you start signing with this domain key.
Selector	Type string Properties Create, Filter, Group, Sort, Update Description Text used to distinguish the DKIM key from any other DKIM keys your organization uses for the specified domain.
TxtRecordName	Type string Properties Filter, Group, Nillable, Sort Description Read-only. The TXT record name is used to create the CNAME record. Refer to the Usage section for more information. This field is available in API version 44.0 and later after activating the Critical Update.
TxtRecordsPublishState	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The possible values are: - Published - Publishing in progress

Field Name	Details
	Publishing failed This field is available in API version 44.0 and later after activating the Critical Update.

Usage

Create DKIM Keys with Increased Security

- If your Salesforce org was created before Winter '19, enable the Critical Update. From Setup, enter *Critical Updates* in the Quick Find box, and then select **Critical Updates**. For Enable Redesigned DomainKeys Identified Mail (DKIM) Key Feature with Increased Email Security, click **Activate**.
- Insert `Domain`, `DomainMatch`, `Selector`, and `AlternateSelector`. Salesforce publishes your TXT record to DNS.
- Retrieve the `TxtRecordName` and `AlternateTxtRecordName` and use them to create and publish the CNAME and Alternate CNAME record to your domain's DNS.
 - Create CNAME record using: `<selector>._domainkey.<domain> IN CNAME txtRecordName.`
 - Create Alternate CNAME record using: `<alternateSelector>._domainkey.<domain> IN CNAME alternateTxtRecordName.`
- Set the `IsActive` field to true.

Create DKIM Keys (pre-Winter '19 Version)



Note: The critical update activates for everyone on October 15, 2019. After that date, this approach to creating DKIM keys will no longer be available.

When you create a DKIM key, Salesforce generates a public and private key pair. Publish the public key in the DNS.

For each domain key you create, we recommend this sequence:

- Insert the `Domain`, `DomainMatch`, and `Selector`.
- Update your domain's DNS records.
 - Locate the DNS record at `selector._domainkey.domain`. For example, `mail._domainkey.mail.example.com`.
 - Add the `PublicKey` value, like this: `V=DKIM1; p=public_key`.

DKIM Signing Outbound Email

- In addition, you can optionally put the record in testing mode, which instructs recipients to not make decisions based on the email signature. Add parameter `t=y` to the DNS entry: `V=DKIM1; t=y; p=public_key`.
- Update the key via the API or UI to be active.

SEE ALSO:

[Salesforce Help: Considerations for Creating DKIM Keys](#)

[Salesforce Help: Setting Up More Secure DKIM Keys](#)

EmailInsight

Represents an insight generated from an email interaction. EmailInsights acts as a central place to store various types of insights related to email messages. The insights stored include status, type, and time of generation. Only certain types of insights can be created based on a pre-configured list of insight types. This object is available in API version 63.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

EmailStream permission must be enabled.

EmailStreamPref and SyncEmailToCoreActivity Org prefs must be enabled.

To be able to see SyncEmailToCoreActivity preference, EACLegacyEmailSyncAWS Org permission, AnalyticsActivity, UnifiedActivities, and ActivityMetrics must be disabled. In addition, license to Standard Einstein Activity Capture and turning on Einstein Activity Capture and EmailInsights provisions the required permissions and preferences.

Fields

Field	Details
EmailMessageId	Type reference Properties Filter, Group, Sort Description Required. The ID of the email message the insight is generated for. This field is a relationship field. Relationship Name EmailMessage Refers To EmailMessage
GeneratedDate	Type dateTime Properties Filter, Sort Description Required. The date and time when the insight was generated in the legacy system.
InsightTypeDescription	Type textarea

Field	Details
	Properties None Description Required. Description of the insight type.
InsightTypeIdentifier	Type string Properties Filter, Group, Sort Description Required. The ID of the insight type based on which the insight is generated.
InsightTypeLabel	Type string Properties Filter, Group, Sort Description Required. The display name of the insight type.
IsLocked	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the email insight record is locked or not. The default value is false.
LegacyInsightIdentifier	Type string Properties Filter, Group, idLookup, Sort Description Required. The unique ID of the insight that was generated and stored in the legacy system.
MayEdit	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the email insight record can be edited or not. The default value is false.

Field	Details
RowVersion	Type string Properties Defaulted on create, Filter, Group, Sort Description A system-generated, read-only field that tracks the version of a record. Each time a record is created or updated, the RowVersion value increments, providing a mechanism to detect changes and manage concurrency.
Status	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Required. The status of the insight record. Possible values are: • Active • Completed • Deprecated • Dismissed The default value is Active.

EmailInsightAction

Represents the actions that have been taken, or could be taken, in relation to email insights. It logs different types of actions and associated metadata, helping to track and manage the activities and decisions made based on email insights. This object is available in API version 63.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

EmailStream permission must be enabled.

EmailStreamPref and SyncEmailToCoreActivity Org prefs must be enabled.

To be able to see SyncEmailToCoreActivity preference, EACLegacyEmailSyncAWS Org permission, AnalyticsActivity, UnifiedActivities, and ActivityMetrics must be disabled. In addition, license to Standard Einstein Activity Capture and turning on Einstein Activity Capture and EmailInsights provisions the required permissions and preferences.

Fields

Field	Details
ActionMetadata	Type textarea Properties Nillable Description The metadata for the action.
EmailInsightId	Type reference Properties Filter, Group, Sort Description Required. The ID of the email insight where the action is applied. This field is a relationship field. Relationship Name EmailInsight Refers To EmailInsight
InsightAction	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Required. The action that's taken on the email insight. Possible values are: - CreateCalendarEvent - CreateTaskWithDate - EciCreateEmail - EciScheduleMeetings - EciSendEmail - EmailReply - EmailReplyLater - EmailReplyWithTemplate - InsertFreeTime - PostOnChatter - ViewCalendar - ViewContactProfile

Field	Details
	The default value is <code>EmailReply</code> .
<code>IsLocked</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the email insight action record is locked or not. The default value is false.
<code>MayEdit</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the email insight action record can be edited or not. The default value is false.
<code>RowVersion</code>	Type string Properties Defaulted on create, Filter, Group, Sort Description A system-generated, read-only field that tracks the version of a record. Each time a record is created or updated, the <code>RowVersion</code> value increments, providing a mechanism to detect changes and manage concurrency.

EmailMessage

Represents an email in Salesforce.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

EmailMessage is only available for orgs that use Email-to-Case or Enhanced Email, which is automatically enabled for most customers.

To use reply and forward functionality, `FromAddress` must specify an email address that exists in `EmailMessageRelation`, with a `RelationType` of `FromAddress`.

The `Status` field is mostly read-only. You can change the status only from *New* to *Read*.

The `HtmlBody` and `RelatedToId` fields are supported in Classic list views but not in Lightning list views. In related lists and search results in Lightning Experience, these fields either don't appear, show blank values, or result in an error.

`update()` is supported when an email record is in *Draft* status, and `IsPrivateDraft` is `false`. It's also supported if the email status is *Draft*, `IsPrivateDraft` is `true`, and `CreatedBy` is associated with the current user. When the email record isn't in *Draft* status, the `IsExternallyVisible` field and custom fields only can be updated.

Set the Update Email Messages user permission for users, such as an Automated Case User, who run automated processes that modify email message-related records. With the Update Email Message permission set, users' processes can modify `EmailMessageRelation` and `ContentDocumentLink` records that are related to an email message that isn't in *Draft* status. Don't set this user permission for other users.

Access to an email message depends on the associated object. The user who created the email is specified in `CreatedById` and always has access, unless that user is a guest user. Guest users have read access if the message is marked as `IsExternallyVisible`.

The object that's used to determine access differs for Email-to-Case and Enhanced Email.

- Email-to-Case—When Email-to-Case is enabled and the email is Case-based (the `ParentId` field is *Case*), access depends on the user's access to the related Case record. If the email message is a draft, only the user in the `CreatedById` field or users with the Modify All Data permission can access it.
- Enhanced Email—Access is activity-based. The `ActivityId` field specifies an associated Task record. You can control access to activity-based objects with the [Access Activities permission](#). Users with the Modify All Data permission can also access the message.

When you use the API to insert `EmailMessage` records in bulk, the same access rules apply: access is based on cases in `ParentId` fields or by tasks in `ActivityId` fields. When inserting a single record, set the `CreatedById` field to the user performing the operation or leave it blank.

Fields

Field	Details
<code>ActivityId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the activity that is associated with the email. Usually represents an open task that is created for the case owner when a new unread email message is received. <code>ActivityId</code> can only be specified for emails on cases. It's auto-created for other entities. If an <code>EmailMessage</code> has a related task, and fields on the email record are updated, we may delete the related task and create a new related task.
<code>AttachmentIds</code>	Type string Properties Create, Nillable, Update

Field	Details
	Description A comma-separated list of email attachments. This is used by the Send Email quick action when you use Salesforce Classic email templates. Maximum length is 32,768 characters.
AutomationType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description A picklist value that determines if an outgoing email was manually created or AI-generated. Possible values are: • <code>AiAssisted</code>—Email is AI-generated, but sent by human. • <code>AiAutomated</code>—Email is generated and sent by AI. • <code>Null</code>—Email is created and sent by human.
BccAddress	Type string Properties Create, Filter, Nillable, Sort, Update Description A string array of email addresses for recipients who were sent a visually impaired carbon copy of the email message. Include only email addresses that aren't associated with Contact, Lead, or User records in Salesforce. If the recipient is a contact, lead, or user, add their ID to the <code>BccIds</code> field instead of adding their email address to the <code>BccAddress</code> field. When adding their ID, the email message is automatically associated with the contact, lead, or user. For an Experience Cloud site user who isn't the sender of the email, this field returns null. You can't send emails unless there's at least one recipient.
BccIds	Type JunctionIdList Properties Create, Update Description A string array of IDs for contacts, leads, and users who were sent a visually impaired carbon copy of the email message. Each ID is linked to an <code>EmailMessageRelation</code> record, which represents the relationship between an email message and a Contact, Lead, or User record. For an Experience Cloud site user who isn't the sender of the email, this list is empty.

Field	Details
	Adding a <code>JunctionIdList</code> field name to the <code>fieldsToNull</code> property deletes all related junction records. This action can't be undone.
<code>CcAddress</code>	Type string Properties Create, Filter, Nillable, Sort, Update Description A string array of email addresses for recipients who were sent a carbon copy of the email message. Include only email addresses that aren't associated with Contact, Lead, or User records in Salesforce. If the recipient is a contact, lead, or user, add their ID to the <code>CcIds</code> field instead of adding their email address to the <code>CcAddress</code> field. Then the email message is automatically associated with the contact, lead, or user. You can't send emails unless there's at least one recipient.
<code>CcIds</code>	Type <code>JunctionIdList</code> Properties Create, Update Description A string array of IDs for contacts, leads, and users who were sent a carbon copy of the email message. Each ID is linked to an <code>EmailMessageRelation</code> record, which represents the relationship between an email message and a Contact, Lead, or User record. Adding a <code>JunctionIdList</code> field name to the <code>fieldsToNull</code> property deletes all related junction records. This action can't be undone.
<code>ClientThreadIdentifier</code>	Type string Properties Create, Filter, Nillable, Sort, Update Description A value used by third-party email clients to identify which thread an email belongs to. See Email-to-Case Threading for more information. Available in API versions 56.0 and later.
<code>ContentDocumentIds</code>	Type <code>JunctionIdList</code> Properties Create, Update

Field	Details
	Description A string array of IDs for content documents such as files and attachments that are associated with an email. Each ID is linked to a <code>ContentDocumentLink</code> record, which represents the relationship between an email message and a content document record. Adding a <code>JunctionIdList</code> field name to the <code>fieldsToNull</code> property deletes all related junction records. This action can't be undone.
Division	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description A logical segment of your organization's data. For example, if your company is organized into different business units, you could create a division for each business unit, such as "North America," "Healthcare," or "Consulting." Available only if the organization has the Division permission enabled.
EmailRoutingAddressId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Stores the ID of the email routing address used to create the email. This value is set when the email is processed by Email-to-Case service. When this field is set, <code>EmailMessage.Incoming</code> cannot be <code>false</code>. Relationship Name EmailRoutingAddress Relationship Type Lookup Refers To EmailRoutingAddress
EmailTemplateId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The email template, if any, that was chosen for the email. This field is populated in Lightning Experience only. This is a relationship field.

Field	Details
	Relationship Name EmailTemplate Relationship Type Lookup Refers To EmailTemplate
FirstOpenedDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date the email was first opened. To see this field, enable email tracking in your org.
FromAddress	Type email Properties Create, Filter, Nillable, Sort, Update Description The address that originated the email. When using this field, specify an email address that exists in EmailMessageRelation, with a <code>RelationType</code> of <code>FromAddress</code>. EmailMessages in Draft status with <code>IsPrivateDraft</code> set to <code>true</code> must use the user's address, a verified org-wide email address, or a verified Email-to-Case routing address in the <code>FromAddress</code> field.
FromId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The contact, lead, or user who sent the email. Maximum length is 18 characters.
FromName	Type string Properties Create, Filter, Nillable, Sort, Update Description The sender's name. When using this field, specify an email address that exists in EmailMessageRelation, with a <code>RelationType</code> of <code>FromAddress</code>.

Field	Details
HasAttachment	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the email was sent with an attachment (<code>true</code>) or not (<code>false</code>).
Headers	Type textarea Properties Create, Nillable, Update Description The Internet message headers of the incoming email. Used for debugging and tracing purposes. Doesn't apply to outgoing emails.
HtmlBody	Type textarea Properties Create, Nillable, Update Description The body of the email in HTML format. You can't send emails unless at least one of these fields has content. • Subject field • HTML Body or Text Body field As the sender, you can provide the content, or it can be automatically inserted using predefined values. An email template can also include the content for these fields.
Incoming	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether the email was received (<code>true</code>) or sent (<code>false</code>).
IsBounced	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the email bounced.

Field	Details
	This field is set to <code>True</code> for bounced emails in orgs using Lightning Threading. It's not set to <code>True</code> for orgs using Ref ID threading. To see this field, enable bounce management in your org.
<code>IsClientManaged</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description If <code>EmailMessage</code> is created with <code>IsClientManaged</code> set to <code>true</code>, users can modify <code>EmailMessage.ContentDocumentIds</code> to link file attachments even when the <code>Status</code> of the <code>EmailMessage</code> isn't set to <code>Draft</code>. When this field is set to <code>true</code> and Enhanced Email is enabled, a Task record is created for the <code>EmailMessage</code> regardless of Email-to-Case settings.
<code>IsDeleted</code>	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
<code>IsExternallyVisible</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If the Experience Cloud site case feed is enabled, <code>IsExternallyVisible</code> controls the external visibility of emails in sites. When <code>IsExternallyVisible</code> is set to <code>true</code>—its default value—external users see the email message in the case feed. • Emails remain visible in the Emails related list whether or not this field is set to <code>true</code>. For security reasons, we recommend that you remove this related list from your case page layout for external community users. • Only emails with a value in the <code>ParentId</code> field can be made externally visible in sites. • This field can't be updated if the email's <code>Status</code> is set to <code>Draft</code>. • The <code>Enable Case Feeds in Experience Cloud Sites</code> organization preference in Setup makes case-related emails, comments, and updates visible to site members. When this preference is off, <code>IsExternallyVisible</code> is <code>True</code> by default for the <code>EmailMessage</code>. When this preference is on, <code>IsExternallyVisible</code>

Field	Details
	defaults to <code>True</code> only if the case contact email is the sender or the recipient of the <code>EmailMessage</code> . Otherwise, <code>IsExternallyVisible</code> defaults to <code>False</code> .
<code>IsOpened</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the email has been opened. To see this field, enable email tracking in your org.
<code>IsPrivateDraft</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description If <code>IsPrivateDraft</code> is set to <code>true</code>, then only the <code>CreatedById</code> user can view, update, and send this email draft. If <code>IsPrivateDraft</code> is set to <code>false</code>, then any user with permissions to work on the case can see these drafts. After the email is sent, then this field is updated to be <code>false</code>. Public drafts are loaded and visible in Salesforce Classic while Private Drafts are only used in Lightning Experience.
<code>IsTracked</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the email is being tracked. To see this field, enable email tracking in your org.
<code>LastOpenedDate</code>	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date the email was last opened. To see this field, enable email tracking in your org.
<code>MessageDate</code>	Type dateTime Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description The date the email was created. For inbound emails, Email-to-Case sets this field using the Date header. The Date header is set by the email client and is subject to the sender's time preferences.
MessageIdentifier	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The ID of the email message.
Name	Type string Properties Filter, Group, idLookup, Sort Description A name for the email message that's derived from the first 255 characters of the Subject field. If the Subject field is empty, a localized string of [No Subject] is used. This field is read-only and can't be created or updated. Available in API versions 56.0 and later.
ParentId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the case that's associated with the email. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To Case
RelatedToId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field**Details****Description**

The `RelatedToId` represents nonhuman objects such as accounts, opportunities, campaigns, cases, or custom objects. RelatedTolds are polymorphic. Polymorphic means a `RelatedTold` is equivalent to the ID of a related object.

You must have access to at least one entity listed under `Refers To` to access `RelatedTold`.

You can update `RelatedToId` when `IsClientManaged` is set to `true`.

`RelatedToId` and `ParentId` should have the same value when `ParentId` is set. You might see unexpected results otherwise.

This is a polymorphic relationship field.

Relationship Name

RelatedTo

Relationship Type

Lookup

Refers To

Account, Accreditation, AssessmentIndicatorDefinition, AssessmentTask, AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskOrder, Asset, AssetRelationship, AssignedResource, Award, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, Campaign, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis, CareInterventionType, CareMetricTarget, CareObservation, CareObservationComponent, CarePgmProvHealthcareProvider, CarePreauth, CarePreauthItem, CareProgram, CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee, CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider, CareProgramTeamMember, CareProviderAdverseAction, CareProviderFacilitySpecialty, CareProviderSearchableField, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareSpecialtyTaxonomy, CareTaxonomy, Case, CommSubscriptionConsent, ContactEncounter, ContactEncounterParticipant, ContactRequest, Contract, CoverageBenefit, CoverageBenefitItem, CreditMemo, DelegatedAccount, DocumentChecklistItem, EnrollmentEligibilityCriteria, HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, IdentityDocument, Image, IndividualApplication, Invoice, ListEmail, Location, MemberPlan, Opportunity, Order, OtherComponentTask, PartyConsent, PersonLifeEvent, PlanBenefit, PlanBenefitItem, ProcessException, Product2, ProductItem, ProductRequest, ProductRequestLineItem, ProductTransfer, PurchaserPlan, ReceivedDocument, ResourceAbsence, ReturnOrder, ReturnOrderLineItem, ServiceAppointment, ServiceResource, Shift, Shipment, ShipmentItem, Solution, Visit, VisitedParty, VolunteerProject, WorkOrder, WorkOrderLineItem

`ReplyToEmailMessageId`

Type

reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort Description ID of the inbound or outbound email message the current email message is a reply to. It's not possible to reply to a message whose <code>Status</code> is <code>Draft</code>. This is a relationship field. This is only set for Case related Email replies at setup. Relationship Name ReplyToEmailMessage Relationship Type Lookup Refers To EmailMessage
Source	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description When Sync Email as Salesforce Activity is enabled, this value reflects from where the email was captured automatically. Available in API version 64.0 and later. Possible values are: • <code>Einstein Activity Capture</code>—Captured as an entire email message by Einstein Activity Capture. • <code>Einstein Activity Capture Limited</code>—Captured as a header-only email by Einstein Activity Capture. The sender, recipients, date, and time of the message were captured, not the subject or body. • <code>Email Integration App Manual</code>—Captured to track the email message records created or edited from the mailapp. • <code>Migrated Captured Email</code>—An email that was captured in Einstein Activity Capture and migrated to an updated version of Einstein Activity Capture in which Sync Email as Activity is turned on. Available in API version 65.0 and later. • <code>Migrated Captured Email Header Only</code>—An email that was captured in Einstein Activity Capture and migrated as header-only data to an updated version of Einstein Activity Capture in which Sync Email as Activity is turned on. Available in API version 65.0 and later.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description The status of the email. The <code>Status</code> field is mostly read-only. You can change the status only from <i>New</i> to <i>Read</i>. Possible values are: • 0 (New) • 1 (Read) • 2 (Replied) • 3 (Sent) • 4 (Forwarded) • 5 (Draft) For emails not sent as part of a case, only the status 3 (Sent) is valid.
Subject	Type string Properties Create, Filter, Nillable, Sort, Update Description The subject line of the email. You can't send emails unless at least one of these fields has content. • Subject field • HTML Body or Text Body field As the sender, you can provide the content, or it can be automatically inserted using predefined values. An email template can also include the content for these fields.
TextBody	Type textarea Properties Create, Nillable, Update Description The body of the email, in plain text format. If <code>TextBody</code> isn't set, then it's extracted from <code>HtmlBody</code>. You can't send emails unless at least one of these fields has content. • Subject field • HTML Body or Text Body field As the sender, you can provide the content, or it can be automatically inserted using predefined values. An email template can also include the content for these fields
ThreadIdIdentifier	Type string

Field	Details
	Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The ID of the email thread the email message belongs to. This field is used by features that sync emails directly from an inbox into Salesforce. This field is not used by On-Demand Email-to-Case.
ToAddress	Type string Properties Create, Filter, Nillable, Sort, Update Description A string array of email addresses for recipients who were sent the email message. Include only email addresses that aren't associated with Contact, Lead, or User records in Salesforce. If the recipient is a contact, lead, or user, add their ID to the <code>ToIds</code> field instead of adding their email address to the <code>ToAddress</code> field. Then the email message is automatically associated with the contact, lead, or user. You can't send emails unless there's at least one recipient.
ToIds	Type JunctionIdList Properties Create, Update Description A string array of IDs for contacts, leads, and users who were sent a carbon copy of the email message. Each ID is linked to an <code>EmailMessageRelation</code> record, which represents the relationship between an email message and a Contact, Lead, or User record. Adding a <code>JunctionIdList</code> field name to the <code>fieldsToNull</code> property deletes all related junction records. This action can't be undone.
ValidatedFromAddress	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description A picklist value with either the sender's address, org-wide email addresses, or Email-to-Case routing address. The email address must be verified. If the sender's email address is used, the sender must be the current user. <code>ValidatedFromAddress</code> isn't suitable for use in Group By or Sort By statements. Use <code>FromAddress</code> instead.

Usage

EmailMessage is limited to 50 custom fields.

If your org uses Email-to-Case, a case is created when an email is sent to one of your company's addresses. The email, which is related to the case by the `ParentID` field, is stored as an EmailMessage record. When users view the email, they see the EmailMessage record.

If your org uses Enhanced Email, each email is stored as an EmailMessage record and a Task record. When users view an email, they see the EmailMessage record.



Note: In an org with Email-to-Case enabled, an inbound (`Incoming = true`) email with case as the parent record won't create a task automatically. This functionality respects the Create Task from Email setting for each Email-to-Case routing address.

If you would like to change the recipients or contents of an outbound email, don't use automation tools, like Flows or Apex triggers, to update EmailMessage records. Unless they are for a draft, updates to EmailMessage records will not be reflected in the actual sent email. To update an email's data before it's sent, use Quick Action predefined values or a [QuickActionDefaultsHandler](#).

When a Flow creates an EmailMessage with set values in the audit fields (like `CreatedBy` and `CreatedDate`), any FeedItem automatically created for that EmailMessage will not share the same audit field values.

Sample Code—Apex

This sample logs email activity in Salesforce.

```
// if EnhancedEmail Perm is not enabled, continue logging the email as a task

// if EnhancedEmail Perm is enabled, create an EmailMessage object
EmailMessage emailMessage = new EmailMessage();
emailMessage.status = '3'; // email was sent
emailMessage.relatedToId = '006B0000003weZGIAY'; // related to record e.g. an opportunity
emailMessage.fromAddress = 'sender@example.com'; // from address
emailMessage.fromName = 'Dan Perkins'; // from name
emailMessage.subject = 'This is the Subject!'; // email subject
emailMessage.htmlBody = '<html><body><b>Hello</b></body></html>'; // email body
// Contact, Lead or User Ids of recipients
String[] toIds = new String[]{'003B0000000AxcEjIAJ'};
emailMessage.toIds = toIds;
// additional recipients who don't have a corresponding contact, lead or user id in the
// Salesforce org (optional)
emailMessage.toAddress = 'emailnotinsalesforce@toexample.com, anotherone@toexample.com';
insert emailMessage; // insert

// Add Email Message Relation for id of the sender
EmailMessageRelation emr = new EmailMessageRelation();
emr.emailMessageId = emailMessage.id;
emr.relationId = '005B0000003qHvOIAU'; // user id of the sender
emr.relationType = 'FromAddress';
insert emr;
```

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

EmailMessageChangeEvent (API version 48.0)
Change events are available for the object.

SEE ALSO:
[Case](#)
[Overview of Salesforce Objects and Fields](#)

EmailMessageMigration

For internal use only.

EmailMessageRelation

Represents the relationship between an email and contacts, leads, and users. This object is available in API version 37.0 and later.

Special Access Rules

EmailMessageRelation is only available for organizations that use Email-to-Case or Enhanced Email, which is automatically enabled for most customers.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
EmailMessageId	Type reference Properties Create, Filter, Group, Sort Description The ID of the <code>EmailMessage</code> record. This is a relationship field. Relationship Name EmailMessage Relationship Type Lookup Refers To EmailMessage

Field Name	Details
RelationAddress	Type string Properties Create, Filter, Group, Nillable, Sort Description The email address of the sender or recipient.  Note: If a record relates an email to an existing contact, lead, or user record in Salesforce, the value of <code>RelationAddress</code> is the current value of the email address. If the value is not set, it is auto-populated from <code>RelationId</code>.
RelationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The <code>RecordId</code> of the sender or recipient.  Note: If a record relates an email to an email address that's not associated with an existing contact, lead, or user record in Salesforce, the value of <code>RelationId</code> is null. This is a polymorphic relationship field. Relationship Name Relation Relationship Type Lookup Refers To Contact, Lead, User
RelationObjectType	Type string Properties Filter, Group, Nillable, Sort Description The API name of the object type of the <code>RecordId</code> in the <code>RelationId</code> field. It can be a contact, lead, or user.
RelationType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort

Field Name	Details
	Description The type of relationship the contact, lead, or user has with the email message. Possible values include: • ToAddress • CcAddress • BccAddress • FromAddress • OtherAddress For an Experience Cloud site user who is not the sender of the email, no <code>BccAddress</code> relations are returned.

Usage

EmailMessageRelation allows an email to be related to contacts, leads, and users.

EmailRelay

Represents the configuration for sending an email relay. An email relay routes email sent from Salesforce through your company's email servers. This object is available in API version 43.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

You must have the Email Administration, Customize Application, and View Setup user permissions to use this object.

Fields

Field Name	Details
AuthType	Type picklist Properties Create, Filter, Group, Restricted Picklist, Sort, Update Description Specifies which SASL mechanism Salesforce uses for SMTP authentication. This field is available when Enable SMTP Auth is selected. Select an option:

Field Name	Details
	- PLAIN- Salesforce uses PLAIN SASL mechanism for SMTP authentication. Default. - LOGIN- Salesforce uses LOGIN SASL mechanism for SMTP authentication This field is available in API version 52.0 and later.
Host	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Indicates the host name or IP address of your company's SMTP server.
IsRequireAuth	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether (true) or not (false) authentication is required. When setting this field to true, the <code>TlsSetting</code> must be set to RequiredVerify. This field is available in API version 44.0 and later.
Password	Type encryptedstring Properties Create, Nillable, Update Description Specifies the password for relay host SMTP authentication. When <code>IsRequireAuth</code> is set to true, this field is required. This field is available in API version 44.0 and later.
Port	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Indicates the port number of your company's SMTP server. 25 587 10025 11025

Field Name	Details
TlsSetting	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Specifies whether Salesforce uses TLS for SMTP sessions. • Off: TLS is turned off. SMTP session continues through an insecure connection. • Preferred: If the remote server supports TLS, Salesforce upgrades the current SMTP session to use TLS. If TLS is unavailable, Salesforce continues the session without TLS. • Required: Salesforce continues the session only if the remote server supports TLS. If TLS is unavailable, Salesforce terminates the session without delivering the email. • PreferredVerify: If the remote server supports TLS, Salesforce upgrades the current SMTP session to use TLS. Before the session begins, Salesforce verifies that the certificate is signed by a valid certificate authority, and that the common name presented in the certificate matches the domain or mail exchange of the current connection. If TLS is available but the certificate is not signed or the common name does not match, Salesforce disconnects the session and does not deliver the email. If TLS is unavailable, Salesforce continues the session without TLS. • RequiredVerify: Salesforce continues the session only if the remote server supports TLS, the certificate is signed by a valid certificate authority, and the common name presented in the certificate matches the domain or mail exchange to which Salesforce is connected. If any of these criteria are not met, Salesforce terminates the session without delivering the email.
Username	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Specifies the username for relay host SMTP authentication. When IsRequiredAuth is set to true, this field is required. This field is available in API version 44.0 and later.

Usage

An email relay must be associated with an active email domain filter to take effect. If you set up multiple email relays in one org, they are processed in the priority order of their email domain filters.

 **Tip:** If you also plan to activate Bounce Management and Email Compliance Management, confirm with your email admin that your company allows relaying email sent from Salesforce. For more information on bounce management, see [Configure Deliverability Settings for Emails Sent from Salesforce](#).

SEE ALSO:

[EmailServicesFunction](#)

[EmailDomainFilter](#)

EmailRoutingAddress

An email address used for Email-to-Case. Email routing addresses store a unique email services address provided by Salesforce and configuration options for emails received by this address.

Supported Calls

`create()`, `describeSObjects()`, `delete()`, `update()`, `query()`, `retrieve()`, `upsert()`

Special Access Rules

To access this object, Email-to-Case must be enabled. Only admin users can access this object.

Fields

Field	Details
PersonalName	Type string Properties Create, Filter, Sort, Update Description The display name of the EmailRoutingAddress. Maximum size is 300 characters.
Address	Type email Properties Create, Filter, Sort, Update Description The email address to which your customers direct their questions. Emails are forwarded from this address.
EmailServicesAddress	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description A unique, Salesforce-generated email address. This field value is read-only and can't be modified. Emails are forwarded to this address.

SEE ALSO:

[EmailServicesAddress](#)

EmailServicesAddress

An email service address.

Each email service has one or more email addresses to which users can send messages for processing. An email service only processes messages it receives at one of its addresses.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, only authenticated internal and external users can access this object.

Fields

Field	Details
AuthorizedSenders	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Configures the email service address to only accept messages from the email addresses or domains listed in this field. If the email service address receives a message from an unlisted email address or domain, the email service performs the action specified in the <code>AuthorizationFailureAction</code> field of its associated email service. Leave this field blank if you want the email service address to receive email from any email address.
DeveloperName	Type string

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The name of the object in the API. This name can contain only underscores and alphanumeric characters and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. This 25-character field must be unique among other EmailServicesAddress records under the same EmailServiceFunction parent. In managed packages, this field prevents naming conflicts on package installations. This field is automatically generated, but you can supply your own value if you create the record using the API. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.  Note: When creating large sets of data, always specify a unique DeveloperName for each record. If no DeveloperName is specified, performance might be slow while Salesforce generates one for each record.
EmailDomainName	Type string Properties Filter, Group, Nillable, Sort Description A read only field you can query that contains the system-generated domain part of this email service address. The system generates a unique domain-part for each email service address to ensure that no two email service addresses are identical.
FunctionId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the email service for which the email service address receives messages. This is a relationship field. Relationship Name Function Relationship Type Lookup Refers To EmailServicesFunction
IsActive	Type boolean

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this object is active (true) or not (false).
LocalPart	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The local-part of the email service address. The local-part of the address is the string that comes before the @ symbol. For the local-part of a Salesforce email address, all alphanumeric characters are valid, plus the following special characters: ! # \$ % & amp; ' * / = ? ^ _ + - ` { } ~ , The dot character (.) is also valid as long as it's not the first or last character. Email addresses aren't case-sensitive.
RunAsUserId	Type reference Properties Create, Filter, Group, Sort, Update Description The username of the user whose permissions the email service assumes when processing messages sent to this address.

Usage

This object supports the email services feature, which allows you to create automated processes that use Apex classes to process the contents, headers, and attachments of inbound email. For example, you can create an email service that automatically creates contact records based on contact information in messages.

SEE ALSO:

[EmailServicesFunction](#)

EmailServicesFunction

An email service.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, only authenticated internal and external users can access this object.

Fields

Field	Details
<code>AddressInactiveAction</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates what the email service does with messages received at an email address that is inactive. One of the following values: • <code>UseSystemDefault</code>—The system default is used. (In API version 41.0 and earlier, the value specified for this choice is 0.) • <code>Bounce</code>—The email service returns the message to the sender with a notification that explains why the message was rejected. (In API version 41.0 and earlier, the value specified for this choice is 1.) • <code>Discard</code>—The email service deletes the message without notifying the sender. (In API version 41.0 and earlier, the value specified for this choice is 2.) • <code>Requeue</code>—The email service queues the message for processing in the next 24 hours. If the message is not processed within 24 hours, the email service returns the message to the sender with a notification that explains why the message was rejected. (In API version 41.0 and earlier, the value specified for this choice is 3.)
<code>ApexClassId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Required. The ID of the Apex class that the email service uses to process inbound messages. This field is required for API version 12.0 and later.
<code>AttachmentOption</code>	Type picklist

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Indicates the types of attachments the email service accepts. One of the following values: • None—The email service accepts the message but discards any attachment. (In API version 41.0 and earlier, the value specified for this choice is 0.) • NoContent—The attachment metadata (filename, MIME type, and so on) is provided to the Apex class, but the body is set to <code>null</code>. There was no previous numeric value for this choice. • TextOnly—The email service only accepts the following types of attachments: – Attachments with a Multipurpose Internet Mail Extension (MIME) type of text. – Attachments with a MIME type of application/octet-stream and a file name that ends with either a .vcf or .vcs extension. These are saved as text/x-vcard and text/calendar MIME types, respectively. (In API version 41.0 and earlier, the value specified for this choice is 1.) • BinaryOnly—The email service only accepts binary attachments, such as image, audio, application, and video files. (In API version 41.0 and earlier, the value specified for this choice is 2.) • All—The email service accepts any type of attachment. (In API version 41.0 and earlier, the value specified for this choice is 3.)
AuthenticationFailureAction	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates what the email service does with messages that fail or do not support any of the authentication protocols if the <code>IsAuthenticationRequired</code> field is true. One of the following values: • UseSystemDefault—The system default is used. (In API version 41.0 and earlier, the value specified for this choice is 0.) • Bounce—The email service returns the message to the sender with a notification that explains why the message was rejected. (In API version 41.0 and earlier, the value specified for this choice is 1.) • Discard—The email service deletes the message without notifying the sender. (In API version 41.0 and earlier, the value specified for this choice is 2.) • Requeue—The email service queues the message for processing in the next 24 hours. If the message is not processed within 24 hours, the email service returns the message to the sender with a notification that explains why the message was rejected. (In API version 41.0 and earlier, the value specified for this choice is 3.)

Field	Details
AuthorizationFailureAction	Type picklist Properties Defaulted on create, Group, Sort, Create, Filter, Nillable, Restricted picklist, Update Description Indicates what the email service does with messages received from senders who are not listed in the <code>AuthorizedSenders</code> field on either the email service or email service address. One of the following values: • <code>UseSystemDefault</code>—The system default is used. (In API version 41.0 and earlier, the value specified for this choice is 0.) • <code>Bounce</code>—The email service returns the message to the sender with a notification that explains why the message was rejected. (In API version 41.0 and earlier, the value specified for this choice is 1.) • <code>Discard</code>—The email service deletes the message without notifying the sender. (In API version 41.0 and earlier, the value specified for this choice is 2.) • <code>Requeue</code>—The email service queues the message for processing in the next 24 hours. If the message is not processed within 24 hours, the email service returns the message to the sender with a notification that explains why the message was rejected. (In API version 41.0 and earlier, the value specified for this choice is 3.)
AuthorizedSenders	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Configures the email service to only accept messages from the email addresses or domains listed in this field. If the email service receives a message from an unlisted email address or domain, the email service performs the action specified in the <code>AuthorizationFailureAction</code> field. Leave this field blank if you want the email service to receive email from any email address.
ErrorRoutingAddress	Type email Properties Create, Filter, Nillable, Sort, Update Description The destination email address for error notification email messages when <code>IsErrorRoutingEnabled</code> is <code>true</code>.
FunctionInactiveAction	Type picklist

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates what the email service does with messages it receives when the email service itself is inactive. One of the following values: • <code>UseSystemDefault</code>—The system default is used. (In API version 41.0 and earlier, the value specified for this choice is <code>0</code>.) • <code>Bounce</code>—The email service returns the message to the sender with a notification that explains why the message was rejected. (In API version 41.0 and earlier, the value specified for this choice is <code>1</code>.) • <code>Discard</code>—The email service deletes the message without notifying the sender. (In API version 41.0 and earlier, the value specified for this choice is <code>2</code>.) • <code>Requeue</code>—The email service queues the message for processing in the next 24 hours. If the message is not processed within 24 hours, the email service returns the message to the sender with a notification that explains why the message was rejected. (In API version 41.0 and earlier, the value specified for this choice is <code>3</code>.)
FunctionName	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the email service.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this object is active (<code>true</code>) or not (<code>false</code>).
IsAuthenticationRequired	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Configures the email service to verify the legitimacy of the sending server before processing a message. The email service uses the SPF, SenderId, and DomainKeys protocols to verify the sender's legitimacy: If the sending server passes at least one of these protocols and does not fail any, the email service accepts the email. If the server fails a protocol or does not support

Field	Details
	any of the protocols, the email service performs the action specified in the <code>AuthenticationFailureAction</code> field.
<code>IsErrorRoutingEnabled</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description When incoming email messages can't be processed, indicates whether error notification email messages are routed to a chosen address or to the senders.
<code>IsTextAttachmentsAsBinary</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If <code>true</code>, text attachments are supplied to the Apex code as a <code>Messaging.BinaryAttachment</code> instead of as a <code>Messaging.TextAttachment</code>. This means that the body is supplied as an Apex Blob instead of as an Apex String.
<code>IsTextTruncated</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description This field is deprecated. It is not available as of API version 23.0 and is deprecated and hidden in versions 17.0 through 22.0. In all API versions, the email service now accepts inbound email messages up to the 10 MB size limit, without truncating the text. Previously, it indicated whether the email service truncated and accepted email messages with HTML body text, plain body text, and text attachments over approximately 100,000 characters (<code>true</code>) or rejected these email messages and notified the sender (<code>false</code>).
<code>IsTlsRequired</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Not currently in use.
<code>OverLimitAction</code>	Type picklist

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates what the email service does with messages if the total number of messages processed by all email services combined has reached the daily limit for your organization. One of the following values: • <code>UseSystemDefault</code>—The system default is used. (In API version 41.0 and earlier, the value specified for this choice is 0.) • <code>Bounce</code>—The email service returns the message to the sender with a notification that explains why the message was rejected. (In API version 41.0 and earlier, the value specified for this choice is 1.) • <code>Discard</code>—The email service deletes the message without notifying the sender. (In API version 41.0 and earlier, the value specified for this choice is 2.) • <code>Requeue</code>—The email service queues the message for processing in the next 24 hours. If the message is not processed within 24 hours, the email service returns the message to the sender with a notification that explains why the message was rejected. (In API version 41.0 and earlier, the value specified for this choice is 3.) The system calculates the limit by multiplying the number of user licenses by 1,000.

Usage

This object supports the email services feature, which allows you to create automated processes that use Apex classes to process the contents, headers, and attachments of inbound email. For example, you can create an email service that automatically creates contact records based on contact information in messages.

SEE ALSO:

[EmailServicesAddress](#)

EmailStatus

Represents the status of email sent.

Supported Calls

`describeSObjects()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
EmailTemplateName	Type string Properties Filter, Group, Nillable, Sort Description The name of the EmailTemplate.
FirstOpenDate	Type dateTime Properties Filter, Nillable, Sort Description Date when the email was first opened by recipient. Label is Date Opened.
LastOpenDate	Type dateTime Properties Filter, Nillable, Sort Description Date when the email was last opened by recipient.
TaskId	Type reference Properties Filter, Group, Sort Description The activity (task or event) associated with the email. Label is Activity ID. This is a relationship field. Relationship Name Task Relationship Type Lookup Refers To Task
TimesOpened	Type int Properties Filter, Group, Sort

Field	Details
	Description Number of times the recipient opened the email.
WhoId	Type reference Properties Filter, Group, Nillable, Sort Description The Whold represents a human such as a lead or a contact. Wholds are polymorphic. Polymorphic means a Whold is equivalent to a contact's ID or a lead's ID. The label is Name ID. This is a polymorphic relationship field. Relationship Name Who Relationship Type Lookup Refers To Contact, Lead

SEE ALSO:

[EmailTemplate](#)

EmailTemplate

Represents a template for an email, mass email, list email, or Sales Engagement email. Supported in first-generation managed packages only.



Note: You can't send a mass email using a Visualforce email template.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
ApiVersion	Type double Properties Create, Filter, Nillable, Sort, Update Description The API version for this class. Every class has an API version specified at creation.
Body	Type textarea Properties Create, Nillable, Update Description Content of the email. Limit: 384 KB.
BrandTemplateId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Required. ID of the BrandTemplate associated with this email template. The brand template supplies letterhead information for the email template.
DeliveryRate	Type percent Properties Filter, Nillable, Sort Description Read-only. The percentage of the emails that were delivered compared to the number that bounced (soft and hard). Note: this data includes emails that were delivered to the recipient's spam folder. This field is available in API version 46.0 and later. To access this field, your org must use Sales Engagement and users need the Sales Engagement User or Sales Engagement Cadence Creator permission set. This field value includes emails sent via the ListEmail object or Sales Engagement cadences.
Description	Type string Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description Description of the template, for example, Promotion Mass Mailing.
DeveloperName	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Label is Template Unique Name .  Note: When creating large sets of data, always specify a unique DeveloperName for each record. If no DeveloperName is specified, performance may slow while Salesforce generates one for each record.
Encoding	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Character set encoding for the template.
EnhancedLetterheadId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the enhanced letterhead associated with the email template.  Note: To use an enhanced letterhead, associate it with a Lightning email template that uses the HML merge language. This is a relationship field. Relationship Name EnhancedLetterhead Relationship Type Lookup Refers To EnhancedLetterhead

Field	Details
EntityType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Description When <code>UiType</code> is 2 (Lightning Experience) or 3 (Lightning ExperienceSample), <code>EntityType</code> indicates which entities this template can be used with (for example, account or lead). Valid values are standard object ID prefixes: 001 for account, 003 for contact, 006 for opportunity, and 00Q for lead, 500 for case, and 701 for campaign. This field has been removed in API version 39.0. Use <code>RelatedEntityType</code> instead.
FolderId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the folder that contains the template. This is a relationship field. Relationship Name Folder Relationship Type Lookup Refers To Folder, Organization, User
FolderName	Type string Properties Filter, Nillable, Sort Description The name of the folder that contains the template.
HasSalesforceFiles	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If the email template has attachments from Salesforce Files. The default value is false.
HtmlValue	Type textarea

Field	Details
	Properties Create, Nillable, Update Description This field contains the content of the email message, including HTML coding to render the email message. Limit: 384 KB.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates that this template is active if <code>true</code>, or inactive if <code>false</code>.
IsBuilderContent	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If the email template was made in Email Template Builder. The default value is false.
LastUsedDate	Type dateTime Properties Filter, Nillable, Sort Description Date and time when this email template was last used. Used with Salesforce Classic templates. Not typically used with Lightning Experience templates.
Markup	Type textarea Properties Create, Nillable, Update Description The Visualforce markup, HTML, JavaScript, or any other Web-enabled code that defines the content of the template.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update

Field	Details
	Description Name of the template. Label is Email Template Name.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, NamespacePrefix is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, NamespacePrefix is set only for objects that are part of an installed managed package. All other objects have no namespace prefix. This field can't be accessed unless the logged-in user has the Customize Application permission.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of the template. This is a relationship field. Relationship Name Owner Relationship Type Lookup Refers To User
RelatedEntityType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description When <code>UiType</code> is 2 (Lightning Experience) or 3 (Lightning ExperienceSample), <code>RelatedEntityType</code> indicates which entities this template can be used with. Valid values are the entity API name: "Account" for account, "Contact" for contact, "Opportunity" for opportunity, "Lead" for lead, and so on. The value can be any entity the user has read access to (including custom entities) but not virtual entities, setup entities, or platform entities. No restrictions exist at the schema level.
Subject	Type string Properties Create, Nillable, Sort, Update Description Content of the subject line. The limit is 1,000 characters for Lightning email templates and 230 characters for Classic email templates.
TemplateStyle	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Style of the template. Possible values are: • <code>formalLetter</code>—Formal Letter • <code>freeForm</code>—Free Form Letter • <code>newsletter</code>—Newsletter • <code>none</code>—No Email Layout • <code>products</code>—Products • <code>promotionLeft</code>—Promotion (Left) • <code>promotionRight</code>—Promotion (Right)
TemplateType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Type of template. Possible values are: • <code>custom</code>—Custom

Field	Details
	• <code>html</code>—HTML • <code>text</code>—Text • <code>visualforce</code>—Visualforce
TimesUsed	Type int Properties Filter, Group, Nillable, Sort Description Number of times this email template has been used. Used with Salesforce Classic templates. Not typically used with Lightning Experience templates.
TotalDelivered	Type int Properties Filter, Group, Nillable, Sort Description Read-only. The total number of emails sent minus hard and soft bounces. Note: this data includes emails that were delivered to the recipient's spam folder. This field is available in API version 46.0 and later. To access this field, your org must use Sales Engagement and users need the Sales Engagement User or Sales Engagement Cadence Creator permission set. This field value includes emails sent via the ListEmail object or Sales Engagement cadences.
TotalHardBounced	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description Read-only. The total number of emails that permanently bounced back to the sender because the address is invalid. A hard bounce can occur because the domain name doesn't exist or because the recipient is unknown. This field is available in API version 46.0 and later. To access this field, your org must use Sales Engagement and users need the Sales Engagement User or Sales Engagement Cadence Creator permission set. This field value includes emails sent via the ListEmail object or Sales Engagement cadences.
TotalOpens	Type int

Field	Details
	Properties Defaulted on create, Filter, Group, Nillable, Sort Description Read-only. The total number of times a prospect's email client loaded the images in the HTML version of the email. We also record an open if the prospect clicks a link within the HTML or text email without downloading images. A click indicates that they viewed the message. Some email clients (Outlook, Apple Mail, Thunderbird) don't display images by default. Pardot counts an open each time the images load. This field is available in API version 46.0 and later. To access this field, your org must use Sales Engagement and users need the Sales Engagement User or Sales Engagement Cadence Creator permission set. This field value includes emails sent via the ListEmail object or Sales Engagement cadences.
TotalSent	Type int Properties Filter, Group, Nillable, Sort Description Read-only. The total number of emails sent, including bounced, opted-out, and invalid To: addresses. This field is available in API version 46.0 and later. To access this field, your org must use Sales Engagement and users need the Sales Engagement User or Sales Engagement Cadence Creator permission set. This field value includes emails sent via the ListEmail object or Sales Engagement cadences.
TotalSoftBounced	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description Read-only. The total number of times a recipient's mail server acknowledged the email, but returned it to the sender. Sometimes it is because the recipient's mailbox is full or the mail server is temporarily unavailable. A soft bounce message can sometimes be delivered at another time. After 5 soft bounces, Pardot opts the prospect out of emails. This field is available in API version 46.0 and later. To access this field, your org must use Sales Engagement and users need the Sales Engagement User or Sales Engagement Cadence Creator permission set. This field value includes emails sent via the ListEmail object or Sales Engagement cadences.
UIType	Type picklist

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates the user interface where this template is usable. Possible values are: • Aloha • SFX • SFX_Sample—SFXSample

Usage

To retrieve this object, issue a describe call on an object, which returns a query result for each activity since the object was created. You can't query these records.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

EmailTemplateChangeEvent (API version 48.0)

Change events are available for the object.

SEE ALSO:

[Attachment](#)

[EmailStatus](#)

[DocumentAttachmentMap](#)

EmailTemplateMonthlyMetric

Represents the monthly engagement metrics for an email template. This object is available in API version 53.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Sales Engagement must be enabled.

Fields

Field	Details
AllEmailsBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The total of hard and soft bounced emails for this email template in the month. This is a calculated field.
AllEmailsDeliveredCount	Type int Properties Filter, Group, Nillable, Sort Description The number of successfully delivered emails for this email template in the month. This is a calculated field.
AllEmailsHardBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of hard bounced emails for this email template in the month.
AllEmailsLinkClickedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails containing a link clicked by the recipient for this email template in the month.
AllEmailsNotDeliveredCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails not delivered for this email template in the month. This field is available in API version 54.0 and later.

Field	Details
AllEmailsOpenedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails opened by the recipient for this email template in the month.
AllEmailsOutOfOfficeCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails that triggered an out-of-office reply for this email template in the month.
AllEmailsRepliedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails replied to for this email template in the month.
AllEmailsSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent for this email template in the month. This is a calculated field.
AllEmailsSoftBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails soft bounced for this email template in the month.
AllEmailsTrackedSentCount	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of emails sent with engagement tracking enabled for this email template in the month.
AllEmailsUntrackedSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent without engagement tracking for this email template in the month.
DeliveredRecipientCount	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who were successfully delivered an email for this email template in the month. This field is available in API version 54.0 and later. This is a calculated field.
DeliveredRecipientRate	Type percent Properties Filter, Nillable, Sort Description The percentage of unique recipients that received an email you sent. This field is available in API version 54.0 and later. This is a calculated field.
EmailTemplateId	Type reference Properties Filter, Group, Sort Description The ID of the related email template. This is a relationship field. Relationship Name EmailTemplate Relationship Type Lookup

Field	Details
	Refers To EmailTemplate
HardBounceTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent with hard bounce tracking. This field is available in API version 54.0 and later.
HrdBncTrackableRecipientSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who received an email with hard bounce tracking. This field is available in API version 54.0 and later.
IsLocked	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the monthly metric record is locked or not. The default value is 'false'.
LinkClickTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent with link click tracking for the email template in the month. This field is available in API version 54.0 and later.
LinkClkTrackableRecipientSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who received an email with link tracking for the email template in the month. This field is available in API version 54.0 and later.

Field	Details
MayEdit	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the monthly metric record can be edited or not. The default value is 'false'.
Month	Type date Properties Filter, Group, Sort Description The month in which the engagement occurred.
MonthInt	Type int Properties Filter, Group, idLookup, Sort Description The month in which the engagement occurred, in yyyyymm format.
OooTrackableRecipientSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who received an email with out-of-office tracking for the email template in the month. Out-of-office tracking requires Inbox. This field is available in API version 54.0 and later.
OpenTrackableRecipientSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who received an email with open tracking for the email template in the month. This field is available in API version 54.0 and later.
OpenTrackableSends	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The number of emails sent with open tracking for the email template in the month. This field is available in API version 54.0 and later.
OutOfOfficeTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent with out-of-office tracking for the email template in the month. This field is available in API version 54.0 and later.
RecipientReplies	Type int Properties Filter, Group, Nillable, Sort Description The number of unique recipients who replied to an email for this email template in the month. This field is available in API version 54.0 and later.
RecipientSends	Type int Properties Filter, Group, Nillable, Sort Description The number of unique email recipients for this email template in the month. This field is available in API version 54.0 and later.
RecipientsHardBounced	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients that hard-bounced an email for this email template in the month. Hard bounces can mean that the recipient's email address doesn't exist or is misspelled. This field is available in API version 54.0 and later.
RecipientsOutOfOffice	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The number of recipients that responded with an out-of-office reply for the email template in the month. This field is available in API version 54.0 and later.
RecipientsSoftBounced	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients that soft-bounced an email for the email template in the month. A soft bounce often indicates a temporary issue with the recipient's email server, such as a full inbox. This field is available in API version 54.0 and later.
ReplyTrackableRecipientSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who received an email with reply tracking for this email template in the month. This field is available in API version 54.0 and later.
ReplyTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent with reply tracking for the email template in the month. This field is available in API version 54.0 and later.
SftBncTrackableRecipientSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who received an email with soft bounce tracking for the email template in the month. This field is available in API version 54.0 and later.
SoftBounceTrackableSends	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The number of emails sent with soft bounce tracking for the email template in the month. This field is available in API version 54.0 and later.
SomeEmailsDeliveredCount	Type int Properties Filter, Group, Nillable, Sort Description The number of sent emails that were successfully delivered to at least one of its recipients for the email template in the month. This field is available in API version 54.0 and later. This is a calculated field.
SomeEmailsDeliveredRate	Type percent Properties Filter, Nillable, Sort Description The percentage of sent and tracked emails that were successfully delivered to at least one of their recipients for the email template in the month. This field is available in API version 54.0 and later. This is a calculated field.
TrackableRecipientSendHrdBncRt	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to unique recipients with hard bounce tracking that hard bounced for the email template in the month. This field is available in API version 54.0 and later. This is a calculated field.
TrackableRecipientSendOooRate	Type percent Properties Filter, Nillable, Sort

Field	Details
	Description The percentage of emails sent with out-of-office tracking that received out-of-office replies from unique recipients for the email template in the month. This field is available in API version 54.0 and later. This is a calculated field.
TrackableRecipientSendReplyRt	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with reply tracking that received replies from unique recipients for the email template in the month. This field is available in API version 54.0 and later. This is a calculated field.
TrackableRecipientSendSftBncRt	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to unique recipients with soft bounce tracking that soft-bounced for the email template in the month. This field is available in API version 54.0 and later. This is a calculated field.
TrackableSendHardBounceRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with hard bounce tracking that hard bounced for the email template in the month. This field is available in API version 54.0 and later. This is a calculated field.
TrackableSendLinkClickRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with link tracking that had link clicks for the email template in the month. This field is available in API version 54.0 and later.

Field	Details
	This is a calculated field.
TrackableSendOpenRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with open tracking that were opened by the recipient for the email template in the month. This field is available in API version 54.0 and later. This is a calculated field.
TrackableSendOutOfOfficeRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with out-of-office tracking that received out-of-office replies for the email template in the month. This field is available in API version 54.0 and later. This is a calculated field.
TrackableSendReplyRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with reply tracking that received replies for the email template in the month. This field is available in API version 54.0 and later. This is a calculated field.
TrackableSendSoftBounceRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with soft bounce tracking that soft bounced for the email template in the month. This field is available in API version 54.0 and later. This is a calculated field.
UniqueEmailsLinkClickedCount	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort
	Description The number of link clicks by unique recipients for the email template in the month.
UniqueEmailsOpenedCount	Type int
	Properties Filter, Group, Nillable, Sort
	Description The number of times an email you sent was opened by a unique recipient for the email template in the month. When you send a list email, this field increments each time a recipient opens the received email.
UniqueEmailsRepliedCount	Type int
	Properties Filter, Group, Nillable, Sort
	Description The number of replies from unique recipients for the email template in the month.

EmbeddedServiceDetail

Represents a metadata catalog object that exposes fields from the underlying Embedded Service setup objects defined in each EmbeddedServiceConfig deployment for guest users. Guest users don't have direct access to the Embedded Service setup objects. Available in API version 39.0 and later.

Supported SOAP Calls

`describeSObjects()`, `query()`

Supported REST HTTP Methods

GET

Fields

Field	Details
AvatarImg	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description URL of the image used as the agent avatar image.
ContrastInvertedColor	Type string Properties Filter, Group, Nillable, Sort Description Accent branding color used in the embedded component, displayed as a hexadecimal value. Changes made to this field in the API aren't reflected in the embedded component.
ContrastPrimaryColor	Type string Properties Filter, Group, Nillable, Sort Description Value of the ContrastPrimaryColor field in the EmbeddedServiceBranding setup object.
CustomMinimizedComponent	Type string Properties Filter, Group, Nillable, Sort Description The custom Aura component that's used for the minimized state for this Embedded Chat deployment.
CustomPrechatComponent	Type string Properties Filter, Group, Nillable, Sort Description The custom Aura component that's used for the pre-chat page for this Embedded Chat deployment.
DurableId	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description Developer name for the EmbeddedServiceConfig.
FieldServiceConfirmCardImg	Type string Properties Filter, Group, Nillable, Sort Description URL of the image used for the confirmation card in embedded Appointment Management (beta).
FieldServiceHomeImg	Type string Properties Filter, Group, Nillable, Sort Description URL of the image used for the home screen in embedded Appointment Management (beta).
FieldServiceLogoImg	Type string Properties Filter, Group, Nillable, Sort Description URL of the logo used for the home screen in embedded Appointment Management (beta).
Font	Type string Properties Filter, Group, Nillable, Sort Description Font used in the chat text of the Embedded Chat window.
FontSize	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Font size for the embedded component. Possible values are: • Small • Medium

Field	Details
	• Large
HeaderBackgroundImg	Type string Properties Filter, Group, Nillable, Sort Description URL of the image used for the header background in Embedded Chat. This field is removed in API version 49.0 and later. The header background image is no longer supported.
Height	Type int Properties Filter, Group, Nillable, Sort Description Height of the embedded component.
IsFieldServiceEnabled	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Specifies whether Field Service is enabled for this Embedded Service deployment (<code>true</code>) or not (<code>false</code>). Embedded Appointment Management is currently beta.
IsLiveAgentEnabled	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Specifies whether Chat is enabled for this Embedded Service deployment (<code>true</code>) or not (<code>false</code>).
IsOfflineCaseEnabled	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Specifies whether offline support is enabled for this Embedded Chat deployment (<code>true</code>) or not (<code>false</code>).

Field	Details
IsPrechatEnabled	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Value of the <code>PrechatEnabled</code> field in the <code>EmbeddedServiceLiveAgent</code> setup object.
IsQueuePositionEnabled	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Specifies whether queue position (displaying the customer's place in line while they wait for an agent) is enabled for this Embedded Chat deployment (<code>true</code>) or not (<code>false</code>).
NavBarColor	Type string Properties Filter, Group, Nillable, Sort Description Value of the <code>NavBarColor</code> field in the <code>EmbeddedServiceBranding</code> setup object.
NavBarTextColor	Type string Properties Filter, Group, Nillable, Sort Description This field is used to set the text color for the header.
OfflineCaseBackgroundImg	Type string Properties Filter, Group, Nillable, Sort Description URL of the image used for the background for the offline support case form in Embedded Chat.
PrechatBackgroundImg	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description URL of the image used for the background for the pre-chat form in Embedded Chat.
PrimaryColor	Type string Properties Filter, Group, Nillable, Sort Description Value of the PrimaryColor field in the EmbeddedServiceBranding setup object.
SecondaryColor	Type string Properties Filter, Group, Nillable Sort Description Value of the SecondaryColor field in the EmbeddedServiceBranding setup object.
SecondaryNavBarColor	Type string Properties Filter, Group, Nillable Sort Description This field is used to set the color of a secondary header.
ShouldHideAuthDialog	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Specifies whether the prompt that the customer log in again during a flow should be hidden (true) or not (false). When it's hidden, the customer is taken directly to your login page.
ShouldShowExistingAppointment	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Specifies whether to display a button on the home screen for customers to access their existing appointments (true) or not (false) for embedded Appointment Management (beta).

Field	Details
ShouldShowNewAppointment	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Specifies whether to display a button on the home screen for customers to create a new appointment (<code>true</code>) or not (<code>false</code>) for embedded Appointment Management (beta).
Site	Type string Properties Filter, Group, Nillable Sort Description Value of the <code>site</code> field in the <code>EmbeddedServiceConfig</code> setup object.
SmallCompanyLogoImg	Type string Properties Filter, Group, Nillable, Sort Description URL of the logo image used with Embedded Chat.
WaitingStateBackgroundImg	Type string Properties Filter, Group, Nillable, Sort Description URL of the image used for the background image in Embedded Chat while the customer waits to be connected with a support agent.
Width	Type int Properties Filter, Group, Nillable, Sort Description Width of the embedded component.



Note: Any changes you make to the image fields override what you've entered in Setup. We recommend setting your image URLs in Setup.

EmbeddedServiceLabel

Represents a customized label in Embedded Chat or embedded Appointment Management. This object is available in API version 44.0 and later.

Supported SOAP Calls

`describeSObjects()`, `query()`

Supported REST HTTP Methods

GET

Fields

Field	Details
CustomLabelName	Type string Properties Filter, Group, Nillable, Sort Description The developer name for the custom label.
DurableId	Type string Properties Filter, Group, Nillable, Sort Description The unique name containing <code>EmbeddedServiceConfig.labelKey</code> .
EmbeddedServiceConfigDeveloperName	Type string Properties Filter, Group, Nillable, Sort Description Developer name for the EmbeddedServiceConfig.
LabelKey	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description The type of label for this embedded component. The value corresponds to the label within a label group (substate of chat state or page type).

Employee

Represents an employee within a company or organization. This object is available in API version 48.0 and later. In API version 49.0 and later, this object supports reports, criteria-based sharing rules, and history tracking, plus you can exclude individual fields from custom page layouts.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access this object, you must have a Workplace Command Center permission set license and the Provides access to Workplace Command Center features system permission or have the Employee Management and Employee User add-on licenses.

Fields

Field	Details
AboutMe	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Information about the employee, such as areas of interest or skills. Values can be provided on Employee's profile page. This field is available even if Chatter is disabled.
AlternateEmail	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description The employee's alternate email address.
Availability	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The employee's availability status. Possible values are: • In The Office • Out Of Office • Out Sick • PTO • Volunteering Time Off • Working Remotely
AvailabilityEndDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The end date of the Employee's availability, inclusive of the date.
AvailabilityStartDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The start date of the Employee's availability, inclusive of the date.
BannerPhotoUrl	Type url Properties Filter, Nillable, Sort Description Read only. The URL for the employee's banner photo. Available in API v51.0 and later.
CurrentWellnessStatus	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The employee's current wellness status. Possible values are:

Field	Details
	• Available To Work • Remote Work Only • Unavailable • Unknown
DateOfBirth	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The employee's date of birth.
Email	Type email Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The employee's email address. This field is unique within your organization.
EmployeeNumber	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. The employee's employment ID for the organization they were hired into. This field is unique within your organization.
EmployeeStatus	Type picklist Properties Create, Filter, Group, Sort, Update Description Required. The employee's current work status. Possible values are: • Active • Inactive • Leave • Terminated
EmploymentType	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The employee's full-time or part-time status. Possible values are: • Full-Time • Part-Time
FirstName	Type string Properties Create, Filter, Group, Sort, Update Description Required. The employee's first name.
FullPhotoUrl	Type url Properties Filter, Nillable, Sort Description Read only. The URL for the employee's profile photo. The URL is updated every time a photo is uploaded and reflects the most recent photo. If a newer photo has been uploaded, the URL returned for an older photo isn't guaranteed to return a photo. Query this field for the URL of the most recent photo. Available in API v51.0 and later.
Gender	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The employee's gender. Possible values are: • Female • Male • Non-Binary / Non-Conforming • Other • Prefer Not to State • Transgender Female • Transgender Male

Field	Details
HomeAddress	Type address Properties Filter, Nillable Description The employee's home address.
HomeCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The city for the employee's home address.
HomeCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The county for the employee's home address.
HomeGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The level of accuracy of an employee's home address geographical coordinates compared with its physical address. A geocoding service typically provides this value based on the address's latitude and longitude coordinates. Possible values are: • Address • Block • City • County • ExtendedZip • NearAddress • Neighborhood • State • Street • Unknown

Field	Details
	• Zip
HomeLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with HomeLongitude to specify the precise geolocation of the employee's home address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places.
HomeLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with HomeLatitude to specify the precise geolocation of the employee's home address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places.
HomePhone	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description The employee's home phone number.
HomePostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The postal code for the employee's home address.
HomeState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The state for the employee's home address.
HomeStreet	Type textarea

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The street for the employee's home address.
IndividualId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description A reference to the Individual record that this employee is assigned to.
InternalOrganizationUnitId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description A reference to the InternalOrganizationUnit this employee is assigned to.
JobProfile	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The employee's job profile at the company.
LastName	Type string Properties Create, Filter, Group, Sort, Update Description Required. The employee's last name.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
LocationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description A reference to the Location that this employee is assigned to.
ManagerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description A reference to the Employee record of the employee's manager.
MediumPhotoUrl	Type url Properties Filter, Nillable, Sort Description Read only. The URL for the medium-sized employee's profile photo. The URL is updated every time a photo is uploaded and reflects the most recent photo. If a newer photo has been uploaded, the URL returned for an older photo isn't guaranteed to return a photo. Query this field for the URL of the most recent photo. Available in API v51.0 and later.
MiddleName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The employee's middle name.
Name	Type string Properties Filter, Group, idLookup, Nillable, Sort

Field	Details
	Description A compound field of <code>Employee.FirstName</code> , <code>Employee.MiddleName</code> , and <code>Employee.LastName</code> .
<code>NameSuffix</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The employee's suffix.
<code>OutOfOfficeMessage</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The message portion of the employee availability. This message can provide reasons or details about the change in availability. The maximum length of this string is 40 characters.
<code>OwnerId</code>	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who currently owns this record. Default value is the user logged in to the API to perform the create operation.
<code>PreferredFirstName</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name the employee prefers to be called.
<code>PreferredPronoun</code>	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The employee's preferred pronoun. Possible values are:

Field	Details
	• He/Him/His • Other/Ask Me • She/Her/Hers • They/Them/Theirs
RelatedPersonId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Links an employee to a person account with a unique value. Reserved for future use. Don't edit it.
SmallPhotoUrl	Type url Properties Filter, Nillable, Sort Description Read only. The URL for the small-sized employee's profile photo. The URL is updated every time a photo is uploaded and reflects the most recent photo. If a newer photo has been uploaded, the URL returned for an older photo isn't guaranteed to return a photo. Query this field for the URL of the most recent photo. Available in API v51.0 and later.
StatusAsOf	Type dateTime Properties Create, Filter, Sort, Update Description Required. Start date of the employee's current status.
StatusEndDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Planned end date for the employee's status.
TimeZone	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description The time zone which the employee's work hours fall within.
UserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Lookup field to associate an Employee record with a user in the org. The field is optional and unique.
WorkPhone	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description The employee's formatted work phone number including country code and extension.
WorkerType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. The type of worker for the employee. Possible values are: • Alumnus • Contractor • Employee • Intern • Temporary
WorkingHoursEnd	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The end time of the employee's working hours.
WorkingHoursStart	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The start time of the employee's working hours.

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

EmployeeHistory (API version 49.0)

History is available for tracked fields of the object.

EmployeeOwnerSharingRule

Sharing rules are available for the object.

EmployeesShare (API version 49.0)

Sharing is available for the object.

SEE ALSO:

[Workplace Command Center for Work.com Developer Guide: Extend Work.com with Custom Solutions](#)

Employee2

Represents an employee within a company or an organization. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available if Talent Recruitment Management is enabled in your org. It's also available to customers who purchase the Unified Employee license. To access the object, you need one of these permission sets.

User Type	Permission Set
Internal Users	HR Service Workspace Personnel
Salesforce Platform Users	Employee Hub Community User OR Unified Employee Permission Set

User Type	Permission Set
	OR
	Work.com License
Unified Employee Users	Unified Employee Permission Set

Fields

Field	Details
AlternateEmail	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description The employee's alternate email address.
ContactId	Type reference Properties Create, Filter, Group, Sort Description The contact associated with the employee. Relationship Name Contact Relationship Type Master-detail Refers To Contact (the master object)
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The ISO currency code for the post-authorization request. Valid value is: • USD—U.S. Dollar The default value is USD.

Field	Details
EmployeeNumber	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The employee's unique ID for their organization.
EmployeeStatus	Type picklist Properties Create, Filter, Group, Sort, Update Description The employee's current work status. Valid values are: • Active • Inactive • Leave • Terminated
EmployeeType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The employee's full-time or part-time status. Valid values are: • Alumnus • Contractor • Permanent • Intern • Temporary
EmploymentType	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The employee's full-time or part-time status. Valid values are: • Full-Time

Field	Details
	Part-Time
InternalOrganizationUnitId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The internal organization unit associated with the employee. Relationship Name InternalOrganizationUnit Refers To InternalOrganizationUnit
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that the user only accessed the record or a related list view (LastReferencedDate), but not viewed the record itself.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the employee record.
StatusEndDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The planned end date for the employee's status.

Field	Details
StatusStartDate	Type dateTime Properties Create, Filter, Sort, Update Description The start date of the employee's current status.
User	Type reference Properties Create, Filter, Nillable, Sort, Update Description The user associated with the employee. After this field is set to a non-null value, you can't update it. Relationship Name User Description User

EmployeeCrisisAssessment

Represents a crisis assessment of an Employee. This object is available in API version 48.0 and later. In API version 49.0 and later, this object supports reports, criteria-based sharing rules, and history tracking, plus you can exclude individual fields from custom page layouts. For Work.com, when an employee responds to a wellness survey, an EmployeeCrisisAssessment record is created based on an employee's answers.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access this object, you must be assigned a Workplace Command Center permission set license and the Provides access to Workplace Command Center features system permission.

Fields

Field	Details
Assessment	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The employee's COVID-19 status at the time of the assessment. Possible values are: • COVID-19 Immune or Recovered • COVID-19 No Symptoms • COVID-19 Symptoms or Exposed • COVID-19 Test Negative • COVID-19 Test Positive • Declined
AssessmentDate	Type dateTime Properties Create, Filter, Sort, Update Description The date of the assessment. Required
AssessmentNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The assessment record number.
CrisisId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The Crisis that this assessment is associated with.
EmployeeId	Type reference Properties Create, Filter, Group, Sort, Update

Field	Details
	Description Required. The Employee that this assessment is associated with.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who currently owns this record. Default value is the user logged in to the API to perform the create operation.
SourceAssessment	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The record in the source system that drove this assessment.
SourceSystem	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The source system that drove this assessment.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

EmployeeCrisisAssessmentHistory (API version 49.0)

History is available for tracked fields of the object.

EmployeeCrisisAssessmentOwnerSharingRule

Sharing rules are available for the object.

EmployeeCrisisAssessmentShare (API version 49.0)

Sharing is available for the object.

SEE ALSO:

[Workplace Command Center for Work.com Developer Guide: Extend Work.com with Custom Solutions](#)

EmpUserProvisioningProcess

Represents an employee-user provisioning process. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object requires a Workplace Command Center add-on license, or an Employee Experience add-on license.

Fields

Field	Details
EndTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time that the user provisioning process ended.
ErrorRecordCount	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of records that encountered an error during the user provisioning process.

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the user provisioning process was last referenced, with a precision of one second.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the user provisioning process was last viewed, with a precision of one second.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the user provisioning process.
ProcessStatus	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The status of the user provisioning process. Possible values are: • Aborted • Cancelled • Failed • Finished • Initializing • Processing • Queued
StartTime	Type dateTime

Field	Details
	Properties Create, Filter, Nillable, Sort, Update Description The date and time that the user provisioning process started.
SuccessRecordCount	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of records that were successfully provisioned during the user provisioning process.
TotalRecordCount	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The total number of records in the user provisioning process.

Usage

Use the EmpUserProvisioningProcess to view the status of an employee-user provisioning process.

EmpUserProvisionProcessErr

Represents an employee-user provisioning process error. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object requires a Workplace Command Center add-on license, or an Employee Experience add-on license.

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the Person Account linked to the employee record associated with the error. This is a relationship field. Relationship Name Account Refers To Account
EmployeeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the employee record associated with the error. This is a relationship field. Relationship Name Employee Relationship Type Lookup Refers To Employee
ErrorCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The error code if the provisioning isn't successful.
ErrorMessage	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description If an error occurred, this field contains the error message.

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the error was last referenced, with a precision of one second.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the error was last viewed, with a precision of one second.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the error.
ProvisioningProcessId	Type reference Properties Create, Filter, Group, Sort Description The ID of the associated user provisioning process. This is a relationship field. Relationship Name ProvisioningProcess Relationship Type Lookup Refers To EmpUserProvisioningProcess

Usage

Use the EmpUserProvisionProcessErr to view the errors for an employee-user provisioning process.

EnablementMeasureDefinition

Represents an Enablement measure, which specifies the job-related activity that a user performs to complete a milestone or outcome in an Enablement program. A measure identifies a source object and optional related objects, with optional field filters and filter logic, for tracking the activity. This object also represents Enablement measure information in Metadata API. This object is available in API version 56.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, the Design and Deliver Enablement Programs permission is required. This permission is enabled by default as part of the Manage Enablement Essentials permission set, which comes with the Enablement add-on license.

Fields

Field	Details
AggregateFieldApiName	Type string Properties Create, Filter, Group, Nillable, Sort Description The unique name in the API for the field that the <code>AggregateFunction</code> uses for calculating. For example, if you're measuring how much revenue a sales rep has won, the value of <code>aggregateFunction</code> is <code>Sum</code> and the value of <code>aggregateFieldApiName</code> is <code>Amount</code>, which is the API name of the Amount field on the Opportunity object.
AggregateFunction	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The method for calculating progress towards the milestone or outcome from records that qualify for the measure's criteria. Possible values are: • Average • Count

Field	Details
	Sum For example, if you're measuring the number of deals won, the function is <code>Count</code>. If the function is <code>Average</code> or <code>Sum</code>, then <code>AggregateFieldApiName</code> specifies the API name of the field to use for calculating progress.
Description	Type string Properties Create, Filter, Sort, Update Description An internal description for the measure to help Enablement admins understand the activity that's tracked.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. The name: - must be 40 characters or fewer - must begin with a letter - can contain only underscores and alphanumeric characters - can't include spaces - can't end with an underscore - can't contain 2 consecutive underscores In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.
DisplayFieldApiName	Type string Properties Create, Filter, Group, Sort Description The unique name in the API for the field that primarily identifies records that qualify for the activity you're measuring. For example, if you're measuring the number of deals won, you're tracking the Opportunity object, and maybe you want to identify opportunities by their name. In this case, this field can be <code>Name</code>, the API name of the Opportunity Name field on the Opportunity object.
IsValid	Type boolean

Field	Details
	Properties Defaulted on create, Filter, Group, Sort Description Specifies whether the measure is valid. A measure becomes invalid and stops tracking progress under these circumstances: • An object or field is removed. • An object label or API name is renamed. • A field's API name is renamed. Default is <code>false</code>. A measure only becomes invalid after a breaking change is saved the corresponding outcome or milestone progress is calculated. See Considerations for Creating and Editing Measures.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Reserved for future use. Don't edit this field.
MasterLabel	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Label for this EnablementMeasureDefinition value. This display value is the internal label that doesn't get translated.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer.

Field	Details
	In orgs that aren't Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix. Available in API version 62.0 and later.
<code>PublishedDateTime</code>	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the measure was activated for use in Enablement programs.
<code>SourceMeasureObjectId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the <code>EnblMeasureObjectDefinition</code> that specifies the criteria for the source object that tracks the activity you're measuring. This field is a relationship field. Relationship Name SourceMeasureObject Relationship Type Lookup Refers To EnblMeasureObjectDefinition
<code>SourceObjectApiName</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The unique name in the API for the source object that tracks the activity you're measuring. This value is a derived value. For example, if you're measuring the number of deals won, this value is <code>Opportunity</code>, the API name for the Opportunity object.
<code>Status</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The availability of the measure for use in Enablement programs. Possible values are:

Field	Details
	• Archived—Available in API versions 56.0 to 60.0. • Draft—The measure is saved, but not activated for use in programs. • Published—The measure is activated for use in programs. In Lightning Experience, this value is Active.

Usage

An EnablementMeasureDefinition can have multiple EnblMeasureObjectDefinition references, depending on the number of related objects in the measure. Consider an example measure that tracks activity on the Opportunity source object and the Account related object.

- The EnablementMeasureDefinition identifies the Opportunity source object.
- An EnblMeasureObjectDefinition specifies the criteria on the Opportunity source object.
- An EnblMeasureObjectDefinition specifies the criteria on the Account related object.

EnablementProgram

Represents an Enablement program, which includes exercises and measurable milestones to help users such as sales reps achieve specific outcomes related to your company's revenue goals. This object is available in API version 56.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- For Enablement admins to create, update, and delete Enablement programs, the Design and Deliver Enablement Programs permission is required. This permission is enabled by default as part of the Manage Enablement Essentials permission set, which comes with the Enablement add-on license.
- For users who take Enablement programs, the Take Enablement Programs permission is required. This permission is enabled by default as part of the Use Enablement Programs permission set, which comes with the Enablement add-on license.
- For partner users who take Partner Enablement programs, the Take Partner Enablement Programs permission is required. This permission is enabled by default as part of the Use Partner Enablement Programs permission set, which comes with the Enablement add-on license. Partner Enablement also requires a [supported Partner Relationship Management \(PRM\) add-on license](#).

Fields

Field	Details
Description	Type textarea

Field	Details
	Properties Create, Update Description A summary of the program's goals and content that's visible to users.
DoesAllowSelfEnrollment	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether users can self-enroll in programs that are shared with them (<code>true</code>) or take only assigned programs (<code>false</code>). The default value is <code>false</code>.
EnablementProgramDefinitionId	Type reference Properties Filter, Group, Nillable, Sort Description The representation for the program in Metadata API. This field is a relationship field. Available in API version 61.0 and later. Relationship Name EnablementProgramDefinition Relationship Type Lookup Refers To EnablementProgramDefinition
IsOutcomeBased	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the program includes a final, measurable outcome (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record. If this value is null, maybe the user accessed this record (LastReferencedDate) but not viewed it yet.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the program that's visible to users. For example, AE Onboarding, Event Prep, or New Product Launch.
NetworkId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the supported Experience Cloud site where a partner program is available. For site requirements, see Considerations for Partner Enablement Programs . Available in API version 60.0 and later. Relationship Name Network Relationship Type Lookup Refers To Network
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of the program. This field is a polymorphic relationship field.

Field	Details
	Relationship Name Owner Relationship Type Lookup Refers To Group, User
PublishedDateTime	Type dateTime Properties Filter, Nillable, Sort Description The date that the program is published.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The status of the program. Only a published program is available for an Enablement admin to assign to users or share with users so they can self-enroll. Possible values are: • Archived • Draft • Published
TotalAssigned	Type int Properties Nillable Description The number of assignments in this program. For example, if the program is assigned to 3 users, then <code>TotalAssigned=3</code> .
TotalBehind	Type int Properties Nillable Description The number of assignments that are behind in this program. For example, if the program is assigned to 3 users, and 2 users are behind on their assignments, then <code>TotalBehind=2</code> .

Field	Details
TotalCompleted	Type int Properties Nillable Description The number of completed assignments in this program. For example, if the program is assigned to 3 users, and 1 user has completed the program, then <code>TotalCompleted=1</code>.
TotalDays	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description Total days of the program. This value is derived from the latest day of all items in the program, including exercises, milestones, and the outcome. This field is a calculated field. For example, a program has Task A on day 1 and Task B on day 2. Since Task B has the latest days of all tasks, then <code>TotalDays=2</code>.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The type of the program. Possible values are: • <code>Enablement</code>—A sales program in Lightning Experience. • <code>PtnrEnablement</code>—A partner program in a supported Experience Cloud site. Available in API version 60.0 and later. • <code>EmployeeServiceEnablement</code>—An employee enablement program in Employee Portal. Available in API version 63.0 and later.

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

[EnablementProgramOwnerSharingRule](#) (API version 60.0)

Sharing rules are available for the object.

[EnablementProgramShare](#) (API version 60.0)

Sharing is available for the object.

EnablementProgramDefinition

Represents Enablement program information in Metadata API. This object is available in API version 61.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

To access this object, the Design and Deliver Enablement Programs permission is required. This permission is enabled by default as part of the Manage Enablement Essentials permission set, which comes with the Enablement add-on license.

Fields

Field	Details
DeveloperName	Type string Properties Filter, Group, Sort Description The unique name of the object in the API. The name: • must be 40 characters or fewer • must begin with a letter • can contain only underscores and alphanumeric characters • can't include spaces • can't end with an underscore • can't contain 2 consecutive underscores In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.
EnablementProgramId	Type reference Properties Filter, Group, Nillable, Sort Description The Enablement program to reference in Metadata API. This field is a relationship field. Relationship Name EnablementProgram Relationship Type Lookup

Field	Details
	Refers To EnablementProgram
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Reserved for future use. Don't edit this field.
MasterLabel	Type string Properties Filter, Group, Sort Description Label for this EnablementProgramDefinition value. This display value is the internal label that doesn't get translated.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, NamespacePrefix is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that aren't Developer Edition orgs, NamespacePrefix is set only for objects that are part of an installed managed package. All other objects have no namespace prefix. Available in API version 62.0 and later.

EnblMeasureObjectDefinition

Represents the criteria for an object that tracks the job-related activity for an Enablement measure in an Enablement program. A separate EnblMeasureObjectDefinition is used for a measure's source object and each optional related object. This object is available in API version 56.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, the Design and Deliver Enablement Programs permission is required. This permission is enabled by default as part of the Manage Enablement Essentials permission set, which comes with the Enablement add-on license.

Fields

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. The name: • must be 40 characters or fewer • must begin with a letter • can contain only underscores and alphanumeric characters • can't include spaces • can't end with an underscore • can't contain 2 consecutive underscores In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.
EnablementMeasureDefinitionId	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description The measure that the EnblMeasureObjectDefinition applies to. This field is a relationship field. Relationship Name EnablementMeasureDefinition Relationship Type Lookup Refers To EnablementMeasureDefinition
FilterLogic	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An expression that determines how to evaluate the optional field filters for the object.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Reserved for future use. Don't edit this field.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Label for the EnblMeasureObjectDefinition value. This display value is the internal label that doesn't get translated.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values.

Field	Details
	- In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. - In orgs that aren't Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix. Available in API version 62.0 and later.
ObjectApiName	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The unique name in the API for the measure's source object or optional related object that the <code>EnblMeasureObjectDefinition</code> describes. For example, if you're measuring the number of deals won for a specific product, this field on one <code>EnblMeasureObjectDefinition</code> references the API name of the Opportunity source object and this field on another <code>EnblMeasureObjectDefinition</code> references the API name of the Opportunity Product related object.
SequenceNumber	Type int Properties Create, Filter, Group, Sort, Update Description A number that specifies the order of the <code>EnblMeasureObjectDefinition</code>, relative to other <code>EnblMeasureObjectDefinition</code> records under the same <code>EnablementMeasureDefinition</code>, starting at 1.

Usage

An `EnablementMeasureDefinition` can have multiple `EnblMeasureObjectDefinition` references, depending on the number of related objects in the measure. Consider an example measure that tracks activity on the Opportunity source object and the Account related object.

- The `EnablementMeasureDefinition` identifies the Opportunity source object.
- An `EnblMeasureObjectDefinition` specifies the criteria on the Opportunity source object.
- An `EnblMeasureObjectDefinition` specifies the criteria on the Account related object.

EnblPgmTaskMeasureProgress

Represents a user's progress through the object and field requirements that an Enablement measure defines for an outcome or milestone in an Enablement program. This object is available in API version 61.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

- For Enablement admins to create, update, and delete Enablement programs, the Design and Deliver Enablement Programs permission is required. This permission is enabled by default as part of the Manage Enablement Essentials permission set, which comes with the Enablement add-on license.
- For users who take Enablement programs, the Take Enablement Programs permission is required. This permission is enabled by default as part of the Use Enablement Programs permission set, which comes with the Enablement add-on license.
- For partner users who take Partner Enablement programs, the Take Partner Enablement Programs permission is required. This permission is enabled by default as part of the Use Partner Enablement Programs permission set, which comes with the Enablement add-on license. Partner Enablement also requires a [supported Partner Relationship Management \(PRM\) add-on license](#).

Fields

Field	Details
ContributingRecordCount	Type int Properties Filter, Group, Nillable, Sort Description The number of records that qualify for a user's progress towards completing an outcome or milestone. To qualify, the activity must meet the criteria that the corresponding Enablement measure defines for specific objects, fields, and field values.
EnblProgramTaskMeasureId	Type reference Properties Filter, Group, Sort Description ID of the record that represents the connection between a specific Enablement measure and a specific milestone or outcome in an Enablement program. This field is a relationship field.

Field	Details
	Relationship Name EnblProgramTaskMeasure Relationship Type Lookup Refers To EnblProgramTaskMeasure
EnblProgramTaskProgressId	Type reference Properties Filter, Group, Sort Description ID of the record that represents the progress through the milestone or outcome. This field is a relationship field. Relationship Name EnblProgramTaskProgress Relationship Type Master-detail Refers To EnblProgramTaskProgress (the master object)
MeasureComputationResult	Type double Properties Filter, Sort Description The calculated progress through the measure's requirements for a milestone or outcome. For example, if the measure is the dollar amount of all closed opportunities, then the field value is measured in dollars. For a composite milestone or a composite outcome, this value represents the progress through only one measure associated with the milestone or outcome.

EnblProgramSection

Represents an optional section in an Enablement program. A section can include other program items, such as milestones and exercises. This object is available in API version 60.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

- For Enablement admins to create, update, and delete Enablement programs, the Design and Deliver Enablement Programs permission is required. This permission is enabled by default as part of the Manage Enablement Essentials permission set, which comes with the Enablement add-on license.
- For users who take Enablement programs, the Take Enablement Programs permission is required. This permission is enabled by default as part of the Use Enablement Programs permission set, which comes with the Enablement add-on license.
- For partner users who take Partner Enablement programs, the Take Partner Enablement Programs permission is required. This permission is enabled by default as part of the Use Partner Enablement Programs permission set, which comes with the Enablement add-on license. Partner Enablement also requires a [supported Partner Relationship Management \(PRM\) add-on license](#).

Fields

Field	Details
DeveloperName	Type string Properties Filter, Group, Sort Description The unique name of the object in the API. The name: • must be 40 characters or fewer • must begin with a letter • can contain only underscores and alphanumeric characters • can't include spaces • can't end with an underscore • can't contain 2 consecutive underscores In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Available in API version 61.0 and later.
EnablementProgramId	Type reference Properties Filter, Group, Sort Description The Enablement program that contains the section. This field is a relationship field. Relationship Name EnablementProgram Relationship Type Lookup

Field	Details
	Refers To EnablementProgram
Name	Type string Properties Filter, Group, idLookup, Sort Description The title of the section that's visible to users when they take the program.
SequenceNumber	Type int Properties Filter, Group, Sort Description A number that specifies the order of the section, relative to other sections, starting at 0.

EnblProgramTaskDefinition

Represents an outcome, a milestone, or an exercise in an Enablement program. A program task is also known as a program item. This object is available in API version 60.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

- For Enablement admins to create, update, and delete Enablement programs, the Design and Deliver Enablement Programs permission is required. This permission is enabled by default as part of the Manage Enablement Essentials permission set, which comes with the Enablement add-on license.
- For users who take Enablement programs, the Take Enablement Programs permission is required. This permission is enabled by default as part of the Use Enablement Programs permission set, which comes with the Enablement add-on license.
- For partner users who take Partner Enablement programs, the Take Partner Enablement Programs permission is required. This permission is enabled by default as part of the Use Partner Enablement Programs permission set, which comes with the Enablement add-on license. Partner Enablement also requires a [supported Partner Relationship Management \(PRM\) add-on license](#).

Fields

Field	Details
CompositeMilestoneType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of logic to use for evaluating the activity from two Enablement measures in a composite milestone. Possible values are: • Addition • Division • Percentage Available in API version 61.0 and later.
CustomEnblPgmTaskSubCategoryId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the EnblProgramTaskSubCategory record associated with a custom exercise type. This field is required when the TaskSubCategory field's value is CustomExercise. This field is a relationship field. Available in API version 62.0 and later. Relationship Name CustomEnblPgmTaskSubCategory Relationship Type Lookup Refers To EnblProgramTaskSubCategory
Day	Type int Properties Filter, Group, Sort Description The day of the program when the item is due, relative to the program's start date. For example, if a user is expected to complete an exercise where they watch a product demo by day 2, this field's value is 2. For an outcome, this field specifies the number of days the full program takes. For example, if your program lasts 60 days, the value of this field is 60 for the outcome.

Field	Details
	This field's value contributes to the program's due date that users see when they take the program.
Description	Type textarea Properties Create Description A summary of the outcome, milestone, or exercise that's visible to users when they take the program.
EnablementProgramId	Type reference Properties Filter, Group, Sort Description The ID of the Enablement program that contains the outcome, milestone, or exercise. This field is a relationship field. Relationship Name EnablementProgram Relationship Type Lookup Refers To EnablementProgram
EnblProgramSectionId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of an optional program section that contains the milestone or exercise. This field is a relationship field. Relationship Name EnblProgramSection Relationship Type Lookup Refers To EnblProgramSection
IsMilestoneAnOutcome	Type boolean

Field	Details
	Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the program item is the program's final outcome (<code>true</code>) or an incremental milestone (<code>false</code>). The default value is <code>false</code>.
LearningItemId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the learning item record for the outcome, milestone, or exercise. This field is a relationship field. Relationship Name LearningItem Relationship Type Lookup Refers To LearningItem
MilestoneTarget	Type double Properties Filter, Nillable, Sort Description The target value for a user to achieve to get credit for completing the outcome or milestone. The unit depends on the specific measure used with the outcome or milestone. For example, if the measure is the dollar amount of all closed opportunities, then the field value is measured in dollars.
MinimumSampleSize	Type int Properties Filter, Group, Nillable, Sort Description The number of records to evaluate when calculating progress for an outcome or milestone that uses an average-based measure. Use this field with <code>MilestoneTarget</code>. For example, if you want users to achieve an average deal size of \$50,000 after closing 4 deals, then this field's value is 4 and <code>MilestoneTarget</code> is 50000.
Name	Type string

Field	Details
	Properties Filter, Group, idLookup, Sort Description The title of the outcome, milestone, or exercise that's visible to users when they take the program.
SequenceNumber	Type int Properties Filter, Group, Sort Description A number that specifies the order of the milestone or exercise, relative to other milestones or exercises that have the same due date in the program or in the same section, starting at 0. This number determines the order of items that users see for that day in the program.
StandardCustomExerciseType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Reserved for future use.
TaskCategory	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of program item. Possible values are: • Exercise • Milestone Milestone is used for both the program's final outcome and incremental milestones.
TaskSubCategory	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of exercise. This value determines the content associated with the exercise. For example, if the field value is <code>video</code>, the exercise must reference video content from the Enablement workspace in the Digital Experiences app. The <code>LearningItemId</code> field specifies the reference to that video content. Possible values are:

Field	Details
	• ActionItem • AudioRecording • CustomExercise—Available in API version 62.0 and later. • Document • FeedbackRequest • Other • OtherExercise • ScheduledEvent • StandardCustomExercise—Reserved for future use. • TextLesson • Trailhead • Video

EnblProgramTaskMeasure

Represents the connection between an Enablement measure and a specific milestone or outcome in an Enablement program. This object is available in API version 61.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

To access this object, the Design and Deliver Enablement Programs permission is required. This permission is enabled by default as part of the Manage Enablement Essentials permission set, which comes with the Enablement add-on license.

Fields

Field	Details
EnablementMeasureDefinitionId	Type reference Properties Filter, Group, Sort Description The ID of the Enablement measure to use with a milestone or outcome.

Field	Details
	This field is a relationship field. Relationship Name EnablementMeasureDefinition Relationship Type Lookup Refers To EnablementMeasureDefinition
EnblProgramTaskDefinitionId	Type reference Properties Filter, Group, Sort Description The ID of the outcome or milestone that uses the Enablement measure. This field is a relationship field. Relationship Name EnblProgramTaskDefinition Relationship Type Master-detail Refers To EnblProgramTaskDefinition (the master object)
SequenceNumber	Type int Properties Filter, Group, Nillable, Sort Description A number that specifies the order of the Enablement measure when multiple measures are used with one outcome or milestone, starting at 0. For example, in a composite milestone that uses the Percentage function, the measure that provides the numerator value is sequence 0 and the measure that provides the denominator value is sequence 1.

EnblProgramTaskProgress

Represents a user's progress towards completing an outcome, a milestone, or an exercise in an Enablement program. This object is available in API version 60.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

- For Enablement admins to create, update, and delete Enablement programs, the Design and Deliver Enablement Programs permission is required. This permission is enabled by default as part of the Manage Enablement Essentials permission set, which comes with the Enablement add-on license.
- For users who take Enablement programs, the Take Enablement Programs permission is required. This permission is enabled by default as part of the Use Enablement Programs permission set, which comes with the Enablement add-on license.
- For partner users who take Partner Enablement programs, the Take Partner Enablement Programs permission is required. This permission is enabled by default as part of the Use Partner Enablement Programs permission set, which comes with the Enablement add-on license. Partner Enablement also requires a [supported Partner Relationship Management \(PRM\) add-on license](#).

Fields

Field	Details
CompletedDateTime	Type dateTime Properties Filter, Nillable, Sort Description The date that the user completed the outcome, milestone, or exercise.
CompletedOnDay	Type int Properties Filter, Group, Nillable, Sort Description Number of days that the user took to complete the outcome, milestone, or exercise.
CompletedPercent	Type percent Properties Filter, Nillable, Sort Description Percentage of the outcome, milestone, or exercise that's complete.
ContributingRecordCount	Type int Properties Filter, Group, Nillable, Sort Description The number of records that qualify for a user's progress towards completing an outcome or milestone. To qualify, the activity must meet the criteria that the corresponding Enablement measure defines for specific objects, fields, and field values.

Field	Details
	Available in API version 61.0 and later.
DueDate	Type date Properties Filter, Group, Sort Description The date the outcome, milestone, or exercise is due.
EnblProgramTaskDefinitionId	Type reference Properties Filter, Group, Sort Description ID of the outcome, milestone, or exercise definition. This field is a relationship field. Relationship Name EnblProgramTaskDefinition Relationship Type Lookup Refers To EnblProgramTaskDefinition
IsCompleted	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Whether the outcome, milestone, or exercise is complete (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
IsNoLongerTracking	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If the user hasn't completed the outcome or milestone and 30 days have elapsed since the program's due date, the value is <code>true</code>. Otherwise, the value is <code>false</code>. The default value is <code>false</code>. For details, see Completion Statuses in Enablement Analytics.
LearningItemProgressId	Type reference

Field	Details
	Properties Filter, Group, Sort Description ID of the record that tracks the user's progress through the program that includes this outcome, milestone, or exercise. This field is a relationship field. Relationship Name LearningItemProgress Relationship Type Lookup Refers To LearningItemProgress
MilestoneComputationResult	Type double Properties Filter, Nillable, Sort Description Derived from the associated EnblProgramTaskDefinition record. For example, if a milestone has a single measure A with a result of 5, this field's value is 5.
ProgressStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Status of the outcome, milestone, or exercise progress. Possible values are: • Behind • Completed Late • Completed On Time • No Longer Tracking • Not Completed • Overdue For details, see Completion Statuses in Enablement Analytics.

EnblProgramTaskSubCategory

Represents a custom exercise type that an Enablement admin adds to an Enablement program in Program Builder. A custom exercise type also requires a corresponding EnblProgramTaskDefinition record for Program Builder and corresponding LearningItem and LearningItemType records for when users take the exercise in the Guidance Center. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

- For Enablement admins to create, update, and delete Enablement programs, the Design and Deliver Enablement Programs permission is required. This permission is enabled by default as part of the Manage Enablement Essentials permission set, which comes with the Enablement add-on license.
- For users who take Enablement programs, the Take Enablement Programs permission is required. This permission is enabled by default as part of the Use Enablement Programs permission set, which comes with the Enablement add-on license.

 **Important:** Custom exercises aren't compatible with Partner Enablement programs.

Fields

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. The name: • must be 40 characters or fewer • must begin with a letter • can contain only underscores and alphanumeric characters • can't include spaces • can't end with an underscore • can't contain 2 consecutive underscores In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.
Icon	Type textarea Properties Create, Update Description The icon to use for the custom exercise type in Program Builder. Use the format <i>iconType: iconName</i>, where the values correspond to icon categories and names from the Salesforce Lightning Design System. • <i>iconType</i> is the type of icon, such as <code>standard</code> or <code>doctype</code>.

Field	Details
	• <i>iconName</i> is the icon name, such as <code>flow</code> or <code>slide</code>. For example, to use the Standard type Flow icon, this value is <code>standard:flow</code>. For details, see Implement Custom Exercise Types for Enablement Programs in the <i>Sales Programs and Partner Tracks with Enablement Developer Guide</i>.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Reserved for future use. Don't edit this field.
LearningItemId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the learning item type record that represents this custom exercise type in the Guidance Center when users take a program. This field is a relationship field. Relationship Name LearningItemType Refers To LearningItemType
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Label for this EnblProgramTaskSubCategory value. This display value is the internal label that doesn't get translated.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation.

Field	Details
	The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that aren't Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.

EngagementChannelType

Represents a channel through which a customer can be reached for communication. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
<code>ContactPointType</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The contact point type of the channel. Possible values are: • <code>Email</code> • <code>MailingAddress</code> • <code>Phone</code> • <code>Social</code> • <code>Web</code>
<code>LastReferencedDate</code>	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Name of the communication subscription consent record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the account owner associated with this customer. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[EngagementChannelTypeChangeEvent](#) (API version 61.0)

Change events are available for the object.

[EngagementChannelTypeFeed](#)

Feed tracking is available for the object.

[EngagementChannelTypeHistory](#)

History is available for tracked fields of the object.

EngagementChannelTypeOwnerSharingRule

Sharing rules are available for the object.

EngagementChannelTypeShare

Sharing is available for the object.

EngagementSignal

Represents data about an individual's engagement action, such as a web click, an email response, or a PDF download. This object is available in API version 62.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
<code>DataSetId</code>	Type reference Properties Filter, Group, Sort Description Required. Unique identifier that refers to the data space where the engagement signal originates. This field is a relationship field. Relationship Name DataSet Refers To DataSet
<code>Description</code>	Type string Properties Filter, Group, Nillable, Sort Description An optional text description of the engagement signal.
<code>DeveloperName</code>	Type string Properties Filter, Group, Sort

Field	Details
	Description Required. API name for the engagement signal that's system-or user-generated.
IsRemote	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates if the engagement signal object is owned by a different org in Data 360. The default value is <code>false</code> .
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp that indicates the last time the engagement signal was referenced by the current user.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp that indicates the last time the current user viewed the engagement signal record.
Name	Type string Properties Filter, Group, idLookup, Sort Description Required. Text label that identifies the engagement signal.
Status	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Picklist value that indicates the current status of the engagement signal. Possible values are: • Active

Field	Details
	• <code>CreateError—Error</code> • <code>DeleteError—Error</code> • <code>Deleting</code> • <code>EditError—Error</code> • <code>Preparing</code> • <code>Processing</code> The default value is <code>Processing</code>.

Usage

Use this object to define foundational data for your business objectives and recommendations in Salesforce Personalization. Use mapped data model object (DMO) fields to identify and track an individual's engagement actions. For example, use data about a web click, an email response, or a PDF download to help achieve your personalization goals.

EngagementSignalCmpndMetric

Represents a rate metric that measures the ratio between two engagement signal metrics, such as product orders and product views to calculate a conversion rate, or email clicks and email opens to determine a click-through rate. Use this object to create complex measurements for A/B testing and web experimentation. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
<code>CompoundMetricFormula</code>	Type string Properties Filter, Group, idLookup, Nillable, Sort Description A read-only formula field that concatenates the three core components of a Compound Metric—the primary metric, the operator, and the secondary metric—into a single string. This field is unique within your Salesforce org. This field is a calculated field.
<code>DenomEngmtSignalMetricId</code>	Type reference

Field	Details
	Properties Create, Filter, Group, Sort, Update Description Points to the <code>EngagementSignalMetric</code> record that serves as the denominator of the compound metric. This field is a relationship field. Relationship Name DenomEngmtSignalMetric Refers To EngagementSignalMetric
IsRemote	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates if the engagement signal compound metric object is owned by a different org in Data 360. The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp that indicates the last time the engagement signal compound metric was referenced by the current user.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp that indicates the last time the current user viewed the engagement signal compound metric record.
Name	Type string Properties Filter, Group, idLookup, Sort

Field	Details
	Description Required. Text label that identifies the engagement signal compound metric.
NumerEngmtSignalMetricId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Points to the <code>EngagementSignalMetric</code> record that serves as the numerator of the compound metric. This field is a relationship field. Relationship Name NumerEngmtSignalMetric Refers To EngagementSignalMetric
Operator	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Represents the mathematical operation that combines the numerator and denominator metrics in the compound metric formula. Possible values are: Ratio The default value is <code>Ratio</code>.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Represents the ID of the user or group that owns the engagement signal compound metric. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User

Usage

Use this object to create rate metrics for A/B testing and web experimentation. To measure the effectiveness of personalization experiences, divide the numerator metric by the denominator metric. These metrics help you make data-driven decisions to compare content performance. This object is used for measurement and isn't used for machine learning model training.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[EngagementSignalCmpndMetricShare](#) on page 67
Sharing is available for the object.

EngagementSignalMetric

Represents a measurable quantity that's derived from an engagement signal, such as the sum of revenue or a count of clicks. Use this object to track user engagement for A/B tests, machine learning model training, and attribution configurations. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AggregateFunction	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Defines the type of calculation used on the metric field. Possible values are: • Avg • Count • Distinct • Select • Sum The default value is Count.

Field	Details
EngagementSignalId	Type reference Properties Create, Filter, Group, Sort Description Required. Represents the ID of the engagement signal that's associated with the metric. This field is a relationship field. Relationship Name EngagementSignal Relationship Type Master-detail Refers To EngagementSignal (the master object)
IsRemote	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates if the engagement signal metric object is owned by a different org in Data 360. The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp that indicates the last time the engagement signal metric was referenced by the current user.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp that indicates the last time the current user viewed the engagement signal metric record.
Name	Type string

Field	Details
	Properties Filter, Group, idLookup, Sort
	Description Required. Text label that identifies the engagement signal metric.

Usage

These derived metrics serve as the core unit of measurement across the personalization platform. Use them to train machine learning models, measure performance in A/B tests, track outcomes in attribution models, and define custom objectives or compound metrics.

EnhancedLetterhead

Represents an enhanced letterhead that can be associated with a Lightning email template that doesn't use the Salesforce Merge Language (SML). This object is available in API version 46.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `describeLayout()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the contents of the header and footer.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Date and time when this enhanced letterhead was last used.
LastViewedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description Date and time when this enhanced letterhead was last viewed.
LetterheadFooter	Type textarea Properties Create, Nillable, Update Description The contents of the enhanced letterhead's footer.
LetterheadHeader	Type textarea Properties Create, Nillable, Update Description The contents of the enhanced letterhead's header.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the enhanced letterhead, such as Standard Company Letterhead.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[EnhancedLetterheadFeed](#)

Feed tracking is available for the object.

Entitlement

Represents the customer support an account or contact is eligible to receive. This object is available in API version 18.0 and later. Entitlements may be based on an asset, product, or service contract.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Sort Description ID of the Account associated with the entitlement.
AssetId	Type reference Properties Filter, Group, Nillable, Sort Description Required. ID of the Asset associated with the entitlement. Must be a valid asset ID.
AssetWarrantyID	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The identifier of the asset warranty record. Must be a valid asset warranty ID. AssetWarranty is available only with Field Service.
BusinessHoursId	Type reference Properties Filter, Group, Nillable, Sort Description Required. ID of the BusinessHours associated with the entitlement. Must be a valid business hours ID.
CasesPerEntitlement	Type int Properties Filter, Group, Nillable, Sort Description The total number of cases the entitlement supports. This field is only available if <code>IsPerIncident</code> is <code>true</code>.
ContractLineItemId	Type reference

Field	Details
	Properties Filter, Group, Nillable, Sort Description Required. ID of the ContractLineItem associated with the entitlement. Must be a valid ID.
EndDate	Type date Properties Create, Filter, Nillable, Update Description The last day the entitlement is in effect.
IsPerIncident	Type boolean Properties Defaulted on create, Filter, Update Description Indicates whether the entitlement is limited to supporting a specific number of cases (<code>true</code>) or not (<code>false</code>).
LastReferencedDate	Type date Properties Filter, Nillable, Sort, Update Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type date Properties Filter, Nillable, Sort, Update Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
LocationID	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description ID of the Location associated with the entitlement. Must be a valid location ID.
Name	Type string Properties Create, Filter, Update Description Required. Name of the entitlement.
SvcApptBookingWindowsId	Type reference Properties Create, Filter, Group, Sort, Nillable, Update Description The operating hours that the entitlement's work orders should respect. The label in the user interface is <code>Operating Hours</code> . Available only if Field Service is enabled.
RemainingCases	Type int Properties Create, Filter, Nillable, Update Description The number of cases the entitlement can support. This field decreases in value by one each time a case is created with the entitlement. This field is only available if <code>IsPerIncident</code> is selected.
RemainingWorkOrders	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of agreed work orders remaining to be created.
ServiceContractId	Type reference Properties Create, Filter, Nillable, Update Description Required. ID of the ServiceContract associated with the entitlement. Must be a valid ID.

Field	Details
SlaProcessId	Type reference Properties Create, Filter, Nillable, Update Description ID of the SlaProcess associated with the entitlement. This field is available in version 19.0 and later.
StartDate	Type date Properties Create, Filter, Nillable, Update Description The first date the entitlement is in effect.
Status	Type picklist Properties Filter, Nillable Description Status of the entitlement, such as <code>Expired</code>.
SvcApptBookingWindows	Type reference Properties Create, Filter, Group, Sort, Nillable, Update Description The operating hours of the entitlement. This field is visible only if Field Service is enabled.
Type	Type picklist Properties Create, Defaulted on create, Filter, Nillable, Update Description The type of entitlement, such as Web or phone support.
WorkOrdersPerEntitlement	Type int Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description Total number of work orders available for this entitlement.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

EntitlementChangeEvent (API version 44.0)

Change events are available for the object.

EntitlementFeed (API version 23.0)

Feed tracking is available for the object.

EntitlementHistory

History is available for tracked fields of the object.

SEE ALSO:

[EntitlementContact](#)

[SlaProcess](#)

EntitlementContact

Represents a Contact eligible to receive customer support via an Entitlement. This object is available in API version 18.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`

Fields

Field	Details
<code>ContactId</code>	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the Contact associated with the entitlement. Must be a valid ID.
<code>EntitlementId</code>	Type reference

Field	Details
	Properties Create, Filter Description Required. ID of the Entitlement associated with the entitlement contact. Must be a valid ID.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted .
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Nillable Description Required. Name of the entitlement contact.

Usage

Use to query and manage entitlement contacts.

SEE ALSO:

[Entitlement](#)

EntitlementTemplate

Represents predefined terms of customer support for a product (Product2). This object is available in API version 18.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, only Salesforce admins, users with access to the Case, Entitlement, or Work Order objects, and users with the View Setup and Configuration permission can access this object.

Fields

Field	Details
BusinessHoursId	Type reference Properties Create, Filter, Nillable, Update Description ID of the BusinessHours associated with the entitlement template. Must be a valid business hours ID.
CasesPerEntitlement	Type int Properties Create, Filter, Nillable, Update Description The total number of cases the entitlement template supports. This field is only available if <code>IsPerIncident</code> is <code>true</code>.
IsPerIncident	Type boolean Properties Create, Defaulted on create, Filter, Update Description Indicates whether the entitlement template is limited to supporting a specific number of cases (<code>true</code>) or not (<code>false</code>).
Name	Type string Properties Create, Filter, idLookup, Update Description Required. Name of the entitlement template.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation.

Field	Details
	The namespace prefix can have one of the following values. - In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. - In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix. Available in version 34.0 and later.
<code>SlaProcessId</code>	Type reference Properties Create, Filter, Nillable, Update Description ID of the <code>SlaProcess</code> associated with the entitlement template. This field is available in API version 19.0 and later.
<code>Term</code>	Type int Properties Create, Defaulted on create, Filter, Nillable, Update Description Number of days that the entitlement template is valid.
<code>Type</code>	Type picklist Properties Create, Filter, Nillable, Update Description The type of entitlement template, such as Web or phone support.

Usage

Use this object to manage entitlement templates.

EntityHistory

Represents historical information about an object's changed field values. This object is only available to users with the "View All Data" permission. This object is unavailable beginning with API version 8.0. Use the object-specific [History](#) objects instead.

Supported Calls

`describeSObjects()`, `getUpdated()`, `getDeleted()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Fields

Field	Details
FieldName	Type picklist Properties Filter, Restricted picklist Description ID of the standard or custom field.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
NewValue	Type anyType Properties Nillable Description New value of the modified field.
OldValue	Type anyType Properties Nillable Description Previous value of the modified field.
ParentId	Type reference Properties Filter

Field	Details
	Description ID of the object that contains the field.
ParentObjectType	Type picklist Properties Filter, Restricted picklist Description The kind of object that contains the field.

Usage

In API version 7.0 and later, this object works with Case, Contract, and Solution objects:

- This object is always read-only in the online application.
- When a field is modified, this object records both the old and new field values. There are exceptions to this behavior for certain fields such as long text areas and multi-select picklists. These fields appear in this object to indicate that the field was changed, but the old and new values are not recorded.
- Two rows are added to this object when foreign key fields change. One row contains the foreign key object names that display in the online application. For example, “Jane Doe” is recorded as the name of a contact. The other row contains the actual foreign key ID that is only returned to and visible from the API.
- Up to a total of twenty fields (standard or custom) can be tracked for a given object.
- In the online application, you can specify which fields are tracked or not tracked at any time.
- As soon as tracking is turned on for a field, all changes to its value are recorded in the database.
- Turning off tracking for a field stops further changes from being recorded, but the history data is not deleted.
- Be advised that deleting a custom field also permanently deletes the history data for that custom field.

EntityMilestone

Represents a required step in a customer support process on a work order. The Salesforce user interface uses the term “object milestone.” This object is available in API version 37.0 and later.

 **Note:** Milestones on cases use the [CaseMilestone](#) object type.

Supported Calls

`delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`

Special Access Rules

- As of Summer '20 and later, only Salesforce admins, users with access to the Case, Entitlement, or Work Order objects, and users with the View Setup and Configuration permission can access this object.
- Entitlement management must be enabled.
- Work orders or Field Service must be enabled.

Fields

Field Name	Details
ActualElapsedTimeInDays	Type double Properties Filter, Nillable, Sort Description The number of days that it took to complete a milestone. (Elapsed Time) – (Stopped Time) = (Actual Elapsed Time)  Note: To display this field, select Enable stopped time and actual elapsed time on the Entitlement Settings page and add the field to the object milestone page layout.
ActualElapsedTimeInHrs	Type double Properties Filter, Nillable, Sort Description The number of hours that it took to complete a milestone. (Elapsed Time) – (Stopped Time) = (Actual Elapsed Time)  Note: To display this field, select Enable stopped time and actual elapsed time on the Entitlement Settings page and add the field to the object milestone page layout.
ActualElapsedTimeInMins	Type int Properties Filter, Group, Nillable, Sort Description The number of minutes that it took to complete a milestone. (Elapsed Time) – (Stopped Time) = (Actual Elapsed Time)  Note: To display this field, select Enable stopped time and actual elapsed time on the Entitlement Settings page and add the field to the object milestone page layout.

Field Name	Details
BusinessHoursId	Type reference Properties Filter, Group, Nillable, Sort Description The business hours on the milestone. If business hours aren't specified, the entitlement process business hours are used. If business hours are also not specified on the entitlement process, the business hours on the record are used.
CompletionDate	Type dateTime Properties Filter, Nillable, Sort, Update Description The date and time the milestone was completed.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
ElapsedTimeInDays	Type double Properties Filter, Nillable, Sort Description The number of days it took to complete a milestone, including time during which the milestone was stopped. Automatically calculated to include the business hours on the record. Elapsed time is calculated only after the Completion Date field is populated. (Elapsed Time) – (Stopped Time) = (Actual Elapsed Time).
ElapsedTimeInHrs	Type double Properties Filter, Nillable, Sort Description The number of hours it took to complete a milestone, including time during which the milestone was stopped. Automatically calculated to include the

Field Name	Details
	business hours on the record. Elapsed time is calculated only after the Completion Date field is populated. (Elapsed Time) – (Stopped Time) = (Actual Elapsed Time).
ElapsedTimeInMins	Type int Properties Filter, Group, Nillable, Sort Description The number of minutes it took to complete a milestone, including time during which the milestone was stopped. Automatically calculated to include the business hours on the record. Elapsed time is calculated only after the Completion Date field is populated. (Elapsed Time) – (Stopped Time) = (Actual Elapsed Time).
IsCompleted	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Green checkmark icon that indicates a milestone completion.
IsViolated	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Red exclamation point icon that indicates a milestone violation.
MilestoneTypeId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the milestone (for instance, First Response).
Name	Type string Properties Filter, Group, Sort, Update Description The name of the milestone.

Field Name	Details
ParentEntityId	Type reference Properties Filter, Group, Sort Description The ID of the record—for example, a work order—that contains the milestone.
SlaProcessId	Type reference Properties Filter, Group, Nillable, Sort Description The entitlement process associated with the milestone.
StartDate	Type dateTime Properties Filter, Nillable, Sort, Update Description The date and time that milestone tracking started.
StoppedTimeInDays	Type double Properties Filter, Nillable, Sort Description The number of days that an agent has been blocked from completing a milestone. For example, an agent may be waiting for a customer to reply with more information.  Note: To display this field, select Enable stopped time and actual elapsed time on the Entitlement Settings page and add the field to the object milestone page layout.
StoppedTimeInHrs	Type double Properties Filter, Nillable, Sort Description The number of hours that an agent has been blocked from completing a milestone. For example, an agent may be waiting for a customer to reply with more information.

Field Name	Details
	 Note: To display this field, select Enable stopped time and actual elapsed time on the Entitlement Settings page and add the field to the object milestone page layout.
StoppedTimeInMins	Type int Properties Filter, Group, Nillable, Sort Description The number of minutes that an agent has been blocked from completing a milestone. For example, an agent may be waiting for a customer to reply with more information.  Note: To display this field, select Enable stopped time and actual elapsed time on the Entitlement Settings page and add the field to the object milestone page layout.
TargetDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time to complete the milestone.
TargetResponseInDays	Type double Properties Filter, Nillable, Sort Description The number of days to complete the milestone. Automatically calculated to include the business hours on the record.
TargetResponseInHrs	Type double Properties Filter, Nillable, Sort Description The number of hours to complete the milestone. Automatically calculated to include the business hours on the record.
TargetResponseInMins	Type int

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description The number of minutes to complete the milestone. Automatically calculated to include the business hours on the record.
TimeRemainingInDays	Type string Properties Filter, Nillable, Sort Description The days that remain before a milestone violation. Automatically calculated to include the business hours on the record.
TimeRemainingInHrs	Type string Properties Filter, Group, Nillable, Sort Description The hours that remain before a milestone violation. Automatically calculated to include the business hours on the record.
TimeRemainingInMins	Type string Properties Group, Nillable, Sort Description The minutes that remain before a milestone violation. Automatically calculated to include the business hours on the record.
TimeSinceTargetInDays	Type string Properties Filter, Nillable, Sort Description The days that have elapsed since a milestone violation. Automatically calculated to include the business hours on the record.
TimeSinceTargetInHrs	Type string Properties Filter, Nillable, Sort

Field Name	Details
	Description The hours that have elapsed since a milestone violation. Automatically calculated to include the business hours on the record.
TimeSinceTargetInMins	Type string Properties Group, Nillable, Sort Description The minutes that have elapsed since a milestone violation. Automatically calculated to include the business hours on the record.

Usage

When you create an entitlement process, you select its type based on the type of record that you want the process to run on: Case or Work Order. Processes created before Summer '16 use the Case type. When a Work Order entitlement process runs on a work order, the resulting milestones on the work order are object milestones. Conversely, when a Case entitlement process runs on a case, the resulting milestones are case milestones, a separate standard object.



Tip: If an entitlement has an entitlement process associated with it, don't use the entitlement for multiple types of support records. An entitlement process works only on records that match the process's type. For example, when a Case entitlement process is applied to an entitlement, the process runs only on cases associated with that entitlement. If a work order is also associated with the entitlement, the process doesn't run on the work order. To ensure that the milestones you set up work as expected, associate a customer's work orders and cases with different entitlements.

Customize page layouts, validation rules, and more for object milestones from the Object Milestones node in Setup under Entitlement Management.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

EntityMilestoneFeed

Feed tracking is available for the object.

EntityMilestoneHistory

History is available for tracked fields of the object.

EntitySubscription

Represents a subscription for a user following a record or another user. This object is available in API version 34.0 and later.

A user can subscribe to a record or to another user. Changes to the record and updates from the users are displayed in the Chatter feed on the user's home page, which is a useful way to stay up-to-date with other users and with changes made to records in Salesforce.

Feeds are available in API version 18.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
NetworkId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the Experience Cloud site where the user is following the record or user. This field is available in API version 26.0 and later, if digital experiences is enabled for your org.
ParentId	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the record or user which the user is following. This is a polymorphic relationship field. Relationship Name Parent Relationship Type Lookup Refers To Account, Accreditation, ActivationTarget, ActivationTrgtIntOrgAccess, ApiAnomalyEventStore, AssessmentIndicatorDefinition, AssessmentTask, AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskIndDefinition, AssessmentTaskOrder, Asset, AssetRelationship, AssignedResource, Award, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, Campaign, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis, CareInterventionType, CareMetricTarget, CareObservation, CareObservationComponent, CarePgmProvHealthcareProvider, CarePreauth, CarePreauthItem, CareProgram, CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee, CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider, CareProgramTeamMember, CareProviderAdverseAction, CareProviderFacilitySpecialty, CareProviderSearchableField, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareSpecialtyTaxonomy, CareTaxonomy, Case, CodeSet, CollaborationGroup, CommSubscription, CommSubscriptionChannelType, CommSubscriptionConsent, CommSubscriptionTiming, ConsumptionSchedule, Contact, ContactEncounter, ContactEncounterParticipant, ContentDocument, Contract,

Field	Details
	CoverageBenefit, CoverageBenefitItem, CredentialStuffingEventStore, CreditMemo, CreditMemoLine, Dashboard, DashboardComponent, DataStream, DelegatedAccount, DocumentChecklistItem, EngagementChannelType, EnhancedLetterhead, EnrollmentEligibilityCriteria, Event, HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, Identifier, Image, IndividualApplication, Invoice, InvoiceLine, Lead, Location, MarketSegment, MarketSegmentActivation, MemberPlan, MessagingSession, MktCalculatedInsight, OperatingHours, Opportunity, Order, OrderItem, OtherComponentTask, PartyConsent, PersonEducation, PersonLanguage, PersonLifeEvent, PersonName, PlanBenefit, PlanBenefitItem, Product2, ProductFulfillmentLocation, ProductItem, ProductItemTransaction, ProductRequest, ProductRequestLineItem, ProductRequired, ProductTransfer, ProfileSkill, ProfileSkillEndorsement, ProfileSkillUser, ProviderSearchSyncLog, PurchaserPlan, PurchaserPlanAssn, ReceivedDocument, Report, ReportAnomalyEventStore, ResourceAbsence, ResourcePreference, ReturnOrder, ReturnOrderLineItem, ServiceAppointment, ServiceResource, ServiceResourceSkill, ServiceTerritory, ServiceTerritoryMember, ServiceTerritoryWorkType, SessionHijackingEventStore, Shift, Shipment, ShipmentItem, Site, SkillRequirement, SocialPost, Solution, Task, ThreatDetectionFeedback, Topic, User, Visit, VisitedParty, Visitor, VoiceCall, VolunteerProject, WorkBadgeDefinition, WorkOrder, WorkOrderLineItem, WorkType, WorkTypeGroup, WorkTypeGroupMember
SubscriberId	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the user who is following the record or user. This is a relationship field. Relationship Name Subscriber Relationship Type Lookup Refers To User

Usage

Consider this when following records and users:

- Users can only follow records that they can see.
- Users can see which records other users are following, unless they don't have access to the records.
- Administrators and users with the "Modify All Data" permission can configure a user to follow records that the user has read access to.
- Administrators and users with the "Modify All Data" permission can configure users to stop following records.

- Following topics is available in API version 29.0 and later. For this reason, a topic ID is now a supported value for the `ParentId` field.
- If you deactivate a user, any `EntitySubscription` where the user is associated with the `ParentId` or `SubscriberId` field, meaning all subscriptions both to and from the user, are soft deleted. If the user is reactivated, the subscriptions are restored. However, if you deactivate multiple users at once and these users follow each other, their subscriptions are hard deleted. In this case, the user-to-user `EntitySubscription` is deleted twice (double deleted). Such subscriptions can't be restored upon user reactivation.

When using `query()` with `EntitySubscription`,

- Note the following SOQL restriction. No SOQL limit if logged-in user has "View All Data" permission. If not, specify a `LIMIT` clause of 1,000 records or fewer.
- A query using a `WHERE` clause can only filter by fields on the `EntitySubscription` object.
- If user sharing is enabled and the querying user is not an administrator, a SOQL query must be constrained either by the `ParentId` or `SubscriberId`. Otherwise, the query behavior at run time is undefined, meaning the result set can be incomplete or inconsistent from invocation to invocation. For an unconstrained query, the sharing check limits imposed on a non-administrative user are likely to be exceeded before the query completes, because access checks are run against both parent and subject, for each row of the result set. We recommend using the Connect REST API to query `EntitySubscription` data instead of running a SOQL query.
- Users without the "View All Data" permission
 - Need read access on the object associated with the `ParentId` field to see which users are following records for the object.
 - Can use an `ORDER BY` clause in a query only to order by fields on the `EntitySubscription` object. For example, if the subscription relates to an `Account` record, the query can `ORDER BY ParentId`, but it can't `ORDER BY Account.Name`.
 - Don't always get all matching subscriptions when running a query. For these users, a query evaluates visibility criteria on a maximum of 500 records to reduce the prospect of long-running queries. If a user runs a query to see the CEO's subscriptions, it might scan a large number of records. The query only returns matches within the first 500 records scanned. It is possible that there are more subscriptions that are visible to the user, but they are not returned. To mitigate this, we recommend using a `WHERE` clause, if possible, to reduce the scope of the query.

Sample—SOQL

The following SOQL query returns subscriptions for all the accounts that a subscriber is following that have more than 10 employees:

```
SELECT Id
FROM EntitySubscription
WHERE SubscriberId = '005U0000000Rg2CIAS'
AND ParentId IN (
  SELECT Id FROM Account
  WHERE NumberOfEmployees > 10
)
LIMIT 200
```

SEE ALSO:

[Custom Object __Feed __Feed](#)

EnvironmentHubMember

Represents a member organization in the Environment Hub. This object is available in API version 29.0 and later.



Note: You can create only 20 member orgs per day. If you need to create additional orgs, log a support case in the [Salesforce Partner Community](#). For product, specify **Platform**. For topic, specify **AppExchange & Managed Packages**.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`

Fields

Field Name	Details
Description	Type textarea Properties Nillable, Update Description A brief description of this org.
DisplayName	Type string Properties Filter, Group, Nillable, Sort, Update Description The name that the user has specified for this member org.
EnvironmentHubId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The Org ID of this member's Environment Hub org.
Instance	Type String Properties Filter, Group, Nillable, Sort Description Name of the instance where the Environment Hub member org resides.
IsFedIdSsoMatchAllowed	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update

Field Name	Details
	Description Indicates if single sign-on (SSO) has been enabled based on matching the Federation ID. The default is <code>false</code>.
IsSandbox	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description Indicates if the member org is a sandbox (<code>true</code>) or not (<code>false</code>). This field is available in API version 36.0 and later.
MemberEntity	Type string Properties Filter, Group, idLookup, Sort Description The unique Org ID of the member org for this record.
MemberType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of member org for this record. Possible values include <code>Branch Org</code>, <code>Patch Org</code>, <code>Release Org</code>, <code>Sandbox Org</code>, <code>Trialforce Management Org</code>, and <code>Trialforce Source Org</code>.  Note: Only one member type at a time is stored. Member type is determined according to this hierarchy: (1) Sandbox, (2) Release, (3) Trialforce Source Org (TSO), (4) Patch, (5) Branch, and (6) Trialforce Management Org (TMO). For example, if an org is both a sandbox and a TMO, the value of <code>MemberType</code> is <code>Sandbox Org</code>.
Name	Type string Properties Defaulted on create, Filter, idLookup, Sort Description The name of the member org for this record.
OrgEdition	Type picklist

Field Name	Details
	Properties Filter, Group, Nillable, Restricted picklist, Sort Description The org's edition, for example, Enterprise Edition or Unlimited Edition.
OrgStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The licensing or creation status of this org. Possible values include <code>Active</code>, <code>Demo</code>, <code>Deleted</code>, <code>Free</code>, <code>Inactive</code>, and <code>Trial</code>.
Origin	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort, Update Description The method by which this org was added to the Environment Hub. Possible values are <code>autoDiscovered</code>, <code>userAdded</code>, and <code>provisioned</code>.
SSOMappedUsers	Type int Properties Filter, Group, Nillable, Sort Description The total number of mapped users in this member org. This field is available in API version 36.0 and later.
ServiceProviderId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The ID of the service provider for this member org. This field is available in API version 36.0 and later.
ShouldAddRelatedOrgs	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort, Update

Field Name	Details
	Description Status of the connection of related orgs to the hub. Possible values are <code>done</code> , <code>notRequested</code> , <code>pending</code> , and <code>requested</code> .
<code>ShouldEnableSSO</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description If SSO should be enabled when this member org is added. The default is <code>false</code> .
<code>SsoStatus</code>	Type picklist Properties Defaulted on create, Filter, Group, Sort, Update Description If SSO has been enabled for this org. Possible values are: • <code>Enabled</code>—Single sign-on is enabled. • <code>Disabled</code>—Single sign-on is disabled. • <code>Pending</code>—Single sign-on is in the process of being enabled. • <code>Failed</code>—Single sign-on enablement failed. Contact Salesforce support for assistance.
<code>SsoUsernameFormula</code>	Type string Properties Filter, Group, Nillable, Sort, Update Description The custom formula for matching users in the hub and member orgs.

Usage

Use this object to access and modify settings of member orgs in the Environment Hub.

Event

Represents an event in the calendar. In the user interface, event and task records are collectively referred to as activities.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

 Note:

- An `EventRelation` object can't be related to a child event, and child events don't include the invitee related list.
- `query()`, `delete()`, and `update()` aren't allowed with events related to more than one contact in API versions 25.0 and earlier.
- `create()` and `update()` aren't available for read-only fields on Lightning Experience event series.
- `upsert()` and `undelete()` aren't supported for syncing changes made to events through the API using the feature Lightning Sync.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AcceptedEventInviteeIds	Type JunctionIdList Properties Create, Update Description A string array of contact or lead IDs who accepted this event. This <code>JunctionIdList</code> is linked to the <code>AcceptedEventRelation</code> child relationship.  Warning: Adding a <code>JunctionIdList</code> field name to the <code>fieldsToNull</code> property deletes all related junction records. This action can't be undone.
AccountId	Type reference Properties Filter, Group, Nillable, Sort Description Represents the ID of the related account. The <code>AccountId</code> is determined as follows. If the value of <code>whatId</code> is any of the following objects, then Salesforce uses that object's <code>AccountId</code>. • Account • Opportunity • Contract • Custom object that's a child of Account If the value of the <code>whatId</code> field is any other object, and the value of the <code>whoId</code> field is a contact object, then Salesforce uses that contact's <code>AccountId</code>. If your org uses Shared Activities, Salesforce uses the <code>AccountId</code> of the primary contact.

Field	Details
	Otherwise, Salesforce sets the value of the <code>AccountId</code> field to <code>null</code>. For information on IDs, see ID Field Type. This is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
ActivityDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Contains the event's due date if the <code>IsAllDayEvent</code> flag is set to <code>true</code>. Doesn't contain the event's latest due date if the <code>IsAllDayEvent</code> flag is set to <code>false</code>. When <code>IsAllDayEvent</code> flag is set to <code>true</code>, use <code>ActivityDateTime</code> or <code>StartDateTime</code>. This field is a date field with a timestamp that's always set to midnight in the Coordinated Universal Time (UTC) time zone. Don't attempt to alter the timestamp to account for time zone differences. Label is Due Date Only. This field is required in API versions 12.0 and earlier if the <code>IsAllDayEvent</code> flag is set to <code>true</code>. The value for this field and <code>StartDateTime</code> must match, or one of them must be <code>null</code>.
ActivityDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Contains the event's due date if the <code>IsAllDayEvent</code> flag is set to <code>false</code>. The time portion of this field is always transferred in the Coordinated Universal Time (UTC) time zone. Translate the time portion to or from a local time zone for the user or the application, as appropriate. Label is Due Date Time. This field is required in API versions 12.0 and earlier if the <code>IsAllDayEvent</code> flag is set to <code>false</code>. The value for this field and <code>StartDateTime</code> must match, or one of them must be <code>null</code>.
ClientGuid	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The client globally unique identifier identifies the external API client used to create the event. Label is Client GUID.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
DeclinedEventInviteeIds	Type JunctionIdList Properties Create, Update Description A string array of contact, lead, or user IDs who declined this event. This <code>JunctionIdList</code> is linked to the <code>DeclinedEventRelation</code> child relationship.  Warning: Adding a <code>JunctionIdList</code> field name to the <code>fieldsToNull</code> property deletes all related junction records. This action can't be undone.
Description	Type textarea Properties Create, Nillable, Update Description Contains a text description of the event. Limit: 32,000 characters.
Division	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description A logical segment of your organization's data. For example, if your company is organized into different business units, you could create a division for each business unit, such as "North America," "Healthcare," or "Consulting." Available only if the organization has the Division permission enabled.
DurationInMinutes	Type int

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Contains the event length, in minutes. Even though this field represents a temporal value, it's an integer type—not a Date/Time type. Required in API versions 12.0 and earlier if <code>IsAllDayEvent</code> is false. In API versions 13.0 and later, this field is optional, depending on the following: • If <code>IsAllDayEvent</code> is true, you can supply a value for either <code>DurationInMinutes</code> or <code>EndTime</code>. Supplying values in both fields is allowed if the values add up to the same amount of time. If both fields are <code>null</code>, the duration defaults to one day. • If <code>IsAllDayEvent</code> is false, a value must be supplied for either <code>DurationInMinutes</code> or <code>EndTime</code>. Supplying values in both fields is allowed if the values add up to the same amount of time. If the multiday event feature is enabled, then API versions 13.0 and later support values greater than 1440 for the <code>DurationInMinutes</code> field. API versions 12.0 and earlier can't access event objects whose <code>DurationInMinutes</code> is greater than 1440. For more information, see Multiday Events. Depending on your API version, errors with the <code>DurationInMinutes</code> and <code>EndTime</code> fields may appear in different places. • Versions 38.0 and before—Errors always appear in the <code>DurationInMinutes</code> field. • Versions 39.0 and later—If there's no value for the <code>DurationInMinutes</code> field, errors appear in the <code>EndTime</code> field. Otherwise, they appear in the <code>DurationInMinutes</code> field.
EndDate	Type date Properties Filter, Group, Nillable, Sort Description Read-only. Available in API versions 46.0 and later. This field supplies the date value that appears in the <code>EndTime</code> field. This field is a date field with a timestamp that is always set to midnight in the Coordinated Universal Time (UTC) time zone.
EndTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Available in API versions 13.0 and later. The time portion of this field is always transferred in the Coordinated Universal Time (UTC) time zone. Translate the time portion to or from a local time zone for the user or the application, as appropriate. This field is optional, depending on the following:

Field	Details
	- If <code>IsAllDayEvent</code> is true, you can supply a value for either <code>DurationInMinutes</code> or <code>EndTime</code>. Supplying values in both fields is allowed if the values add up to the same amount of time. If both fields are <code>null</code>, the duration defaults to one day. - If <code>IsAllDayEvent</code> is false, a value must be supplied for either <code>DurationInMinutes</code> or <code>EndTime</code>. Supplying values in both fields is allowed if the values add up to the same amount of time. Depending on your API version, errors with the <code>DurationInMinutes</code> and <code>EndTime</code> fields may appear in different places. - Versions 38.0 and before—Errors always appear in the <code>DurationInMinutes</code> field. - Versions 39.0 and later—If there's no value for the <code>DurationInMinutes</code> field, errors appear in the <code>EndTime</code> field. Otherwise, they appear in the <code>DurationInMinutes</code> field.
<code>EventSubtype</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Provides standard subtypes to facilitate creating and searching for events. This field isn't updateable.
<code>EventWhoIds</code>	Type <code>JunctionIdList</code> Properties Create, Update Description A string array of contact or lead IDs used to create many-to-many relationships with a shared event. <code>EventWhoIds</code> is available when the shared activities setting is enabled. The first contact or lead ID in the list becomes the primary <code>whoId</code> if you don't specify a primary <code>whoId</code>. If you set the <code>EventWhoIds</code> field to null, all entries in the list are deleted and the value of <code>whoId</code> is added as the first entry.  Warning: Adding a <code>JunctionIdList</code> field name to the <code>fieldsToNull</code> property deletes all related junction records. This action can't be undone.
<code>GroupEventType</code>	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Read-only. Available in API versions 19.0 and later. The possible values are: 0 (Non-group event)—An event with no invitees.

Field	Details
	1 (Group event)—An event with invitees. 2 (Proposed event)—An event created when a user requests a meeting with a contact, lead, or person account using the Salesforce user interface. When the user confirms the meeting, the proposed event becomes a group event. You can't create, edit, or delete proposed events in the API. This value is no longer used in API version 41.0 and later. 3 (IsRecurrence2 Series Pattern)—An event representing a template for a series recurrence pattern in Lightning Experience. You can't view, create, edit, or delete these events in the API.
IsAllDayEvent	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the <code>ActivityDate</code> field (<code>true</code>) or the <code>ActivityDateTime</code> field (<code>false</code>) is used to define the date or time of the event. Label is All-Day Event. See also DurationInMinutes and EndDateTime.
IsArchived	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the event has been archived.
IsChild	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the event is a child of another event (<code>true</code>) or not (<code>false</code>). For a child event, you can update <code>IsReminderSet</code> and <code>ReminderDateTime</code> only. You can query and delete a child event. If the objects related to the child event are different from those objects related to the parent event (this difference is possible if you use API version 25.0 or earlier) and one of the objects related to the child event is deleted, the objects related to the parent event are updated to ensure data integrity.
IsClientManaged	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Indicates whether the event is managed by an external client. If the value of this field is false, the event isn't owned or managed by an external client, and Salesforce can be used to update it. If the value is true, Salesforce can be used to change only noncritical fields on the event. Label is Is Client Managed.
IsGroupEvent	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the event is a group event—that is, whether it has invitees (<code>true</code>) or not (<code>false</code>).
IsPrivate	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether users other than the creator of the event can (<code>false</code>) or can't (<code>true</code>) see the event details when viewing the event user's calendar. However, users with the View All Data or Modify All Data permission can see private events in reports and searches, or when viewing other users' calendars. Private events can't be associated with opportunities, accounts, cases, campaigns, contracts, leads, or contacts. Label is Private.
IsRecurrence	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether a Salesforce Classic event is scheduled to repeat itself (<code>true</code>) or only occurs one time (<code>false</code>). This field is read-only when updating records, but not when creating them. If this field value is <code>true</code>, then <code>RecurrenceEndDateOnly</code>, <code>RecurrenceStartDateTime</code>, <code>RecurrenceType</code>, and any recurrence fields associated with the given recurrence type must be populated. Label is Create recurring series of events.
IsRecurrence2	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Read-only. This field is available in API version 44.0 and later. Indicates whether a Lightning Experience event is scheduled to repeat (<code>true</code>) or only occurs one time (<code>false</code>). If this field value is true, then <code>Recurrence2PatternText</code> and <code>Recurrence2PatternVersion</code> must be populated. Label is Repeat.
<code>IsRecurrence2Exception</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Read-only. This field is available in API version 44.0 and later. Indicates whether an individual event in a Lightning Experience event series is different from the rest of the series, making it an exception. Changes made to the series aren't made to an event that is an exception.
<code>IsRecurrence2Exclusion</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Read-only. This field is available in API version 44.0 and later. Indicates when updates to a Lightning Experience event series recurrence pattern have been made, but affect future event occurrences only. For past event occurrences, <code>IsRecurrence2Exclusion</code> is set to <code>true</code>, excluding past occurrences from the series recurrence pattern.
<code>IsReminderSet</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the activity is a reminder (<code>true</code>) or not (<code>false</code>). To set <code>IsReminderSet</code> to <code>true</code>, the <code>ReminderDateTime</code> field must contain a valid date and time to trigger the reminder.
<code>IsVisibleInSelfService</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether an event associated with an object can be viewed in the Customer Portal (<code>true</code>) or not (<code>false</code>). If your org has enabled digital experiences, events marked <code>IsVisibleInSelfService</code> are visible to any external user in the Experience Cloud

Field	Details
	site, as long as the user has access to the record the event was created on. This field is available when - Customer Portal or partner portal is enabled OR - Digital experiences is enabled and you have Customer Portal or partner portal licenses
Location	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Contains the location of the event.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Contains the ID of the user or public calendar who owns the event. Label is Assigned to ID. This is a polymorphic relationship field.  Important: By default, the event is assigned to the user who created it. If the event is created by the Automated Process user, add a different value for OwnerId. The Automated Process user isn't a valid value for the OwnerId field. Relationship Name Owner Relationship Type Lookup Refers To Calendar, User
Recurrence2PatternStartDate	Type dateTime Properties Filter, Nillable, Sort Description Read-only. This field is available in API version 44.0 and later. Indicates the date and time when the Lightning Experience event series begins. The time portion of this field is always transferred in the Coordinated Universal Time (UTC) time zone. Translate the time portion to or from a local time zone for the user or the application, as appropriate.

Field	Details
Recurrence2PatternText	Type textarea Properties Create, Nillable Description The RRULE that describes the recurrence pattern for Lightning Experience event series. Supports a subset of the RFC 5545 standard for internet calendaring and scheduling. See the Event Series section in this topic for usage examples. This field has a maximum length of 512 characters. This field is available in API version 44.0 and later, and has the <code>Create</code> property in API version 52.0 and later.
Recurrence2PatternTimeZone	Type string Properties Filter, Group, Nillable, Sort Description This field is available in API version 44.0 and later. Indicates the time zone in which the Lightning Experience event series was created or updated. This field uses standard Java TimeZone IDs. For example, America/Los_Angeles.
Recurrence2PatternVersion	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort, Description For internal use only. This field is available in API version 44.0 and later.
RecurrenceActivityId	Type reference Properties Filter, Group, Nillable, Sort Description Read-only. Not required on create. Contains the ID of the main record of the Salesforce Classic recurring event. Subsequent occurrences have the same value in this field.
RecurrenceDayOfMonth	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the day of the month on which the event repeats.

Field	Details
RecurrenceDayOfWeekMask	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the day or days of the week on which the Salesforce Classic recurring event repeats. This field contains a bitmask. The values are as follows: • Sunday = 1 • Monday = 2 • Tuesday = 4 • Wednesday = 8 • Thursday = 16 • Friday = 32 • Saturday = 64 Multiple days are represented as the sum of their numerical values. For example, Tuesday and Thursday = 4 + 16 = 20.
RecurrenceEndDateOnly	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the last date on which the event repeats. For multiday Salesforce Classic recurring events, this date is the day on which the last occurrence starts. This field is a date field with a timestamp that is always set to midnight in the Coordinated Universal Time (UTC) time zone. Don't attempt to alter the timestamp to account for time zone differences.
RecurrenceInstance	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates the frequency of the Salesforce Classic event's recurrence. For example, 2nd or 3rd.
RecurrenceInterval	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the interval between Salesforce Classic recurring events.

Field	Details
RecurrenceMonthOfYear	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates the month in which the Salesforce Classic recurring event repeats.
RecurrenceStartDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Indicates the date and time when the Salesforce Classic recurring event begins. The value must precede the <code>RecurrenceEndDateOnly</code>. The time portion of this field is always transferred in the Coordinated Universal Time (UTC) time zone. Translate the time portion to or from a local time zone for the user or the application, as appropriate.
RecurrenceTimeZoneSidKey	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates the time zone associated with a Salesforce Classic recurring event. For example, "UTC-8:00" for Pacific Standard Time.
RecurrenceType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates how often the Salesforce Classic event repeats. For example, daily, weekly, or every nth month (where "nth" is defined in <code>RecurrenceInstance</code>).
ReminderDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Represents the time when the reminder is scheduled to fire, if <code>IsReminderSet</code> is set to <code>true</code>. If <code>IsReminderSet</code> is set to <code>false</code>, then the user may have deselected the reminder checkbox in the Salesforce user interface, or the reminder has already fired at the time indicated by the value.

Field	Details
ShowAs	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates how this event appears when another user views the calendar: Busy, Out of Office, or Free. Label is Show Time As.
StartTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Indicates the start date and time of the event. Available in versions 13.0 and later. If the Event <code>IsAllDayEvent</code> flag is set to true (indicating that it's an all-day Event), then the event start date information is contained in the <code>StartTime</code> field. The time portion of this field is always transferred in the Coordinated Universal Time (UTC) time zone. Translate the time portion to or from a local time zone for the user or the application, as appropriate. If the Event <code>IsAllDayEvent</code> flag is set to false (indicating that it isn't an all-day event), then the event start date information is contained in the <code>StartTime</code> field. The time portion is always transferred in the Coordinated Universal Time (UTC) time zone. You need to translate the time portion to or from a local time zone for the user or the application, as appropriate. If this field has a value, then <code>ActivityDate</code> and <code>ActivityDateTime</code> must either be <code>null</code> or match the value of this field.
Subject	Type combobox Properties Create, Filter, Nillable, Sort, Update Description The subject line of the event, such as Call, Email, or Meeting. Limit: 255 characters.
Type	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the event type, such as Call, Email, or Meeting.

Field	Details
UndecidedEventInviteeIds	Type JunctionIdList Properties Create, Update Description A string array of contact, lead, or user IDs who are undecided about this event. This <code>JunctionIdList</code> is linked to the <code>UndecidedEventRelation</code> child relationship.  Warning: Adding a <code>JunctionIdList</code> field name to the <code>fieldsToNull</code> property deletes all related junction records. This action can't be undone.
WhatCount	Type int Properties Filter, Group, Nillable, Sort Description Available if your organization has enabled Shared Activities. Represents the count of related <code>EventRelations</code> pertaining to the <code>WhatId</code>. The count of the <code>WhatId</code> must be 1 or less.
WhatId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The <code>WhatId</code> represents nonhuman objects such as accounts, opportunities, campaigns, cases, or custom objects. <code>WhatIds</code> are polymorphic. Polymorphic means a <code>WhatId</code> is equivalent to the ID of a related object. The label is <code>Related To ID</code>. This is a polymorphic relationship field. Relationship Name What Relationship Type Lookup Refers To Account, Accreditation, AssessmentIndicatorDefinition, AssessmentTask, AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskOrder, Asset, AssetRelationship, AssignedResource, Award, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, Campaign, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis, CareInterventionType, CareMetricTarget, CareObservation, CareObservationComponent, CarePgmProvHealthcareProvider, CarePreauth, CarePreauthItem, CareProgram, CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee, CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider, CareProgramTeamMember,

Field	Details
	CareProviderAdverseAction, CareProviderFacilitySpecialty, CareProviderSearchableField, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareSpecialtyTaxonomy, CareTaxonomy, Case, CommSubscriptionConsent, ContactEncounter, ContactEncounterParticipant, ContactRequest, Contract, CoverageBenefit, CoverageBenefitItem, CreditMemo, DelegatedAccount, DocumentChecklistItem, EnrollmentEligibilityCriteria, HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, IdentityDocument, Image, IndividualApplication, Invoice, ListEmail, Location, MemberPlan, Opportunity, Order, OtherComponentTask, PartyConsent, PersonLifeEvent, PlanBenefit, PlanBenefitItem, ProcessException, Product2, ProductItem, ProductRequest, ProductRequestLineItem, ProductTransfer, PurchaserPlan, ReceivedDocument, ResourceAbsence, ReturnOrder, ReturnOrderLineItem, ServiceAppointment, ServiceResource, Shift, Shipment, ShipmentItem, Solution, Visit, VisitedParty, VolunteerProject, WorkOrder, WorkOrderLineItem
WhoCount	Type int Properties Filter, Group, Nillable, Sort Description Available to organizations that have Shared Activities enabled. Represents the count of related EventRelations pertaining to the whoId.
WhoId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The Whold represents a human such as a lead or a contact. Wholds are polymorphic. Polymorphic means a Whold is equivalent to a contact's ID or a lead's ID. The label is Name ID. If Shared Activities is enabled, the value of this field is the ID of the related lead or primary contact. If you add, update, or remove the Whold field, you might encounter problems with triggers, workflows, and data validation rules that are associated with the record. The label is Name ID. If the JunctionIdList field is used, all whoIds are included in the relationship list. Beginning in API version 37.0, if the contact or lead ID in the whoId field isn't in the EventWhoIds list, no error occurs and the ID is added to the EventWhoIds as the primary whoId. If whoId is set to null, an arbitrary ID from the existing EventWhoIds list is promoted to the primary position. This is a polymorphic relationship field.
	Relationship Name Who

Field	Details
	Relationship Type Lookup
	Refers To Contact, Lead

Usage

Use Event to manage calendar appointments.

Querying and Filtering Events

Queries on events are denied before they time out if they involve amounts of data that are deemed too large. In such cases, the exception code `OPERATION_TOO_LARGE` is returned. If you receive `OPERATION_TOO_LARGE`, refactor your query to return or scan a smaller amount of data.

When querying for events with a specific due date, you must filter on both the `ActivityDateTime` and `ActivityDate` fields. For example to find all events with a due date of February 14, 2003, you need two filters:

- One filter with the `ActivityDate` field equal to the Coordinated Universal Time (UTC) time zone on February 14, 2003.
- One filter with the `ActivityDate` field greater than or equal to midnight on February 14, 2003 in the user's local time zone AND less than or equal to midnight on February 15, 2003 in the user's local time zone.

Alternatively, in API version 13.0 and later, you can find events with a specific due date by filtering on `StartTime`. For example, to find all events with a due date of February 14, 2003, filter with the `StartTime` greater than or equal to midnight on February 14, 2003 in the user's local time zone AND less than or equal to midnight on February 15, 2003 in the user's local time zone.

The `EventId` field of an `EventRelation` object always points to the master record. An invitee on a group event can query the `EventRelation` object to view the master record.

Multiday Events

- Multiday events are available in API version 13.0 and later. Also, in earlier versions SOQL queries don't return multiday events.
- Multiday events are enabled through the user interface from Setup by entering *Activity Settings* in the *Quick Find* box, then selecting **Activity Settings**.
- If the multiday event feature is enabled, then API versions 13.0 and later support values greater than 1440 for the `DurationInMinutes` field. API versions 12.0 and earlier can't access event objects whose `DurationInMinutes` is greater than 1440.
- Multiday events can't exceed 14 days.

Event Series and Recurring Events

In Lightning Experience, events with multiple occurrences are called event series, and are indicated when the `IsRecurrence2` field is set to `true`. In Salesforce Classic, events with multiple occurrences are called recurring events, and are indicated when the `IsRecurrence` field is set to `true`. Both fields can't be set to `true` for the same event.

- Lightning Experience event series are available in API version 44.0 and later as read-only fields. Recurrence patterns, specified by the `Recurrence2PatternText` field, are creatable in API version 52.0 and later. Salesforce Classic recurring events are available in API version 7.0 and later. In earlier versions, SOQL queries don't return any Lightning Experience event series.
- After an event is created, you can't change the values of `IsRecurrence2` or `IsRecurrence` from `true` to `false` or vice versa.
- You can't set fields associated with `IsRecurrence2` for events where `IsRecurrence` is set to `true`, or vice versa.

- For Lightning Experience event series where `IsRecurrence2` is `true`, if you'd like to delete a single or all remaining events, use the REST API call. For Salesforce Classic recurring events where `IsRecurrence` is `true`, all past and future events in the series are removed when you delete the recurring event series through the API. However, when you delete the recurring event series through the user interface, only future occurrences are removed.
- For Lightning Experience event series in API version 58.0 and later, when you change a future event, events in the entire series also change. When you change a past event, `IsRecurrence2Exception` is set to `true` and only that past event changes.
- When creating a Salesforce Classic recurring event series, the duration of the event must be 24 hours or less. When the Salesforce Classic recurring event series is created, you can extend the length of individual occurrences beyond 24 hours if Multiday events are enabled; see **Multiday Events**.
- For Salesforce Classic recurring events, `RecurrenceStartDateTime`, `RecurrenceEndDateOnly`, `RecurrenceType`, and any properties associated with the given recurrence type (see the Recurrence Field Usage for Salesforce Classic Recurring Events table) must be populated.
- When updating a Salesforce Classic recurring event series, it's not possible to update the `EventRelation` for the event series object and the `EventRelation` for the series object occurrences at the same time.
- Lightning Experience event series have no series ID, so it's not possible to locate other occurrences in the series. In Salesforce Classic recurring events, you can use `RecurrenceActivityId` to locate other occurrences.
- For both Lightning Experience event series and Salesforce Classic recurring events, when a series repeats every day, month, or year, you can only schedule occurrences one time per day, month, or year. The week option lets you schedule occurrences multiple days per week.

[Limits for Lightning Experience event series](#) and [limits for Salesforce Classic recurring events](#) also apply.

Lightning Experience Event Series and Recurring Events

Use the `Recurrence2PatternText` field to specify the recurrence pattern for Lightning Experience event series. These recurrence patterns, called reference rules or RRULES, support a subset of the RFC 5545 standards. This table includes common RRULE examples.

Recurrence Pattern	RRULE Example
Every day for five days	<code>RRULE:FREQ=DAILY;INTERVAL=1;COUNT=5</code>
Every Monday, Tuesday, Wednesday, Thursday, and Friday with no end date	<code>RRULE:FREQ=WEEKLY;INTERVAL=1;BYDAY=MO,TU,WE,TH,FR</code>
Every two weeks on Monday and Friday for 10 occurrences	<code>RRULE:FREQ=WEEKLY;INTERVAL=2;BYDAY=MO,FR;COUNT=10</code>
Monthly on the first day of the month until January 1, 2020	<code>RRULE:FREQ=MONTHLY;INTERVAL=1;BYMONTHDAY=1;UNTIL=20200101T000000Z</code>
Yearly on July 4th for three years (in this example, specify the date using <code>StartDateTime</code>)	<code>RRULE:FREQ=YEARLY;INTERVAL=1;BYMONTH=7;BYMONTHDAY=4;COUNT=3</code>
Daily until January 1, 2022 with no end date	<code>RRULE:FREQ=DAILY;UNTIL=20220101T000000Z</code>
Every third Friday of the month with no end date	<code>RRULE:FREQ=MONTHLY;BYSETPOS=3;BYDAY=FR</code>

The RRULE defined by `Recurrence2PatternText` supports a subset of the RFC 5545 standard for internet calendaring and scheduling. Supported RRULE parts include `FREQ`, `BYMONTH`, `BYMONTHDAY`, `BYDAY`, `WKST`, `BYSETPOS`, `INTERVAL`, `UNTIL`, and `COUNT`.

When the event record is saved, the RRULE might be modified to follow the required format:

- The RRULE parts are placed in the following order: `FREQ`, `BYMONTH`, `BYMONTHDAY`, `BYDAY`, `WKST`, `BYSETPOS`, `INTERVAL`, `UNTIL`, and `COUNT`.
- Any missing default values are inserted. For example, if the RRULE doesn't include `INTERVAL`, then `INTERVAL=1` is added.

- The RRULE is prefaced with `RRULE :` if that preface is missing.

RRULE Part	Supported RFC 5545 Implementation
FREQ	Required. Indicates the type of recurrence rule. Allowed values are: • DAILY—supported parts include FREQ, INTERVAL, UNTIL, and COUNT. • WEEKLY—supported parts include INTERVAL, UNTIL, COUNT, BYDAY, and WKST. BYDAY is required, but can't be preceded by a number. For example, to indicate weekly on Tuesday and Thursday until September 1, 2023, use <code>RRULE:FREQ=WEEKLY;UNTIL=20230901T000000Z;BYDAY=TU,TH</code> • MONTHLY—supported patterns include: – BYMONTHDAY For example, to indicate monthly on the third day of the month use: <code>RRULE:FREQ=MONTHLY;BYMONTHDAY=3</code> – BYDAY and BYSETPOS For example, to indicate the last weekday of the month, use <code>RRULE:FREQ=MONTHLY;BYDAY=MO,TU,WE,TH,FR;BYSETPOS=-1</code> – BYDAY, where the BYDAY values are specified with a numeric value For example, to indicate monthly on the first Friday for 10 occurrences, use <code>RRULE:FREQ=MONTHLY;COUNT=10;BYDAY=1FR</code> • YEARLY—supported patterns include: – BYMONTH, BYDAY, and BYSETPOS For example, to indicate every year on the second Friday of January, use <code>RRULE:FREQ=YEARLY;BYMONTH=1;BYDAY=FR;BYSETPOS=2</code> – BYMONTH and BYMONTHDAY For example, to indicate every year on October 31, use <code>RRULE:FREQ=YEARLY;BYMONTH=10;BYMONTHDAY=31</code> For example, to create a maintenance pattern such as twice in May, and September on 7th and 15th; and one time in June/July/August on the 1st, use two RRULEs: <code>RRULE:FREQ=MONTHLY;BYMONTH=5,9;BYMONTHDAY=7,15</code> <code>RRULE:FREQ=MONTHLY;BYMONTH=6,7,8;BYMONTHDAY=1</code>
BYMONTH	The month. Valid values are 1 to 12.
BYMONTHDAY	The day of the month. Valid values are 1 to 31. If BYMONTHDAY is 31 and the month has fewer than 31 days, the event is created on the last day of the month.
BYDAY	A comma-separated list of days of the week. Valid values are SU, MO, TU, WE, TH, FR, SA. For RRULES with yearly or monthly frequency, BYDAY must be one of: • a single day • weekend days • weekdays

RRULE Part	Supported RFC 5545 Implementation
	every day of the week Each BYDAY value can be preceded by an integer that indicates the nth occurrence of a specific day within the monthly or yearly RRULE. Allowed values are -1, 1, 2, 3, and 4. You can't use different numbers in the BYDAY values. For example, this RRULE isn't supported: <pre>RRULE:FREQ=MONTHLY;INTERVAL=2;COUNT=10;BYDAY=1SU,-1SU</pre> If BYDAY values are prefaced with a number, the RRULE can't include BYSETPOS.
WKST	Specifies the day on which the workweek starts. Valid values are MO, TU, WE, TH, FR, SA, and SU. Default value is based on the user's locale.
BYSETPOS	A comma-separated list of values that correspond to the nth occurrence within the set of recurrence instances specified by the rule. Valid values are -1, 1, 2, 3, or 4. Default value is 1. For example, to indicate the last weekday of the month, use: <pre>RRULE:FREQ=MONTHLY;BYDAY=MO,TU,WE,TH,FR;BYSETPOS=-1</pre>
INTERVAL	The repetition interval. Valid values are: - an integer between 1 and 999 if FREQ=DAILY - an integer between 1 and 99 if FREQ=WEEKLY or FREQ=MONTHLY 1 if FREQ=YEARLY Default value is 1.
UNTIL	Specifies the datetime in UTC format when the recurrence rule stops. The supported format is yyyyMMddTHH:mm:ssZ, for example: 20210419T083000Z. An RRULE can't contain both UNTIL and COUNT. A recurring event without either UNTIL or COUNT repeats indefinitely.
COUNT	The number of occurrences. Allowed values are 1 to 999. An RRULE can't contain both UNTIL and COUNT. A recurring event without either UNTIL or COUNT repeats indefinitely.
BYWEEKNO	Specifies a comma-separated list of values that specify weeks of the year. Valid values are: 1 to 53 -53 to -1 For example, to indicate specific weeks in a year, use: <code>RRULE: BYWEEKNO=20, -20</code>. This rule part can't be used when the FREQ rule part is set to anything other than YEARLY. For example, 3 represents the third week of the year. Note: Assuming a Monday week start, week 53 can only occur when Thursday is January 1 or if it's a leap year and Wednesday is January 1.
BYYEARDAY	Specifies a comma-separated list of values that specify days of the year. Valid values are: 1 to 366 -366 to -1

RRULE Part	Supported RFC 5545 Implementation
	For example, to indicate specific days in a year, use: <code>RRULE:BYEARDAY=1,100,200</code> ; or, <code>RRULE:BYEARDAY=1,-2</code> .

Salesforce Classic Event Series and Recurring Events

This table describes the usage of recurrence fields for Salesforce Classic recurring events. Each recurrence type must have all of its properties set. All unused properties must be set to null.

RecurrenceType Value	Properties	Example Pattern
RecursDaily	RecurrenceInterval	Every second day
RecursEveryWeekday	RecurrenceDayOfWeekMask	Every weekday - can't be Saturday or Sunday
RecursMonthly	RecurrenceDayOfMonth RecurrenceInterval	Every second month, on the third day of the month
RecursMonthlyNth	RecurrenceInterval RecurrenceInstance RecurrenceDayOfWeekMask	Every second month, on the last Friday of the month
RecursWeekly	RecurrenceInterval RecurrenceDayOfWeekMask	Every three weeks on Wednesday and Friday
RecursYearly	RecurrenceDayOfMonth RecurrenceMonthOfYear	Every March on the 26th day of the month
RecursYearlyNth	RecurrenceDayOfWeekMask RecurrenceInstance RecurrenceMonthOfYear	The first Saturday in every October

Attendees, Invitees, and Resources

The field `GroupEventType` indicates that event participants are included on an event. You can add a resource to an event only when the resource is available. The only attendance status that can be assigned to resources is Accepted. Events can't be saved when resources you've added aren't available.

JunctionIdList

To create an event using `JunctionIdList`, IDs are pulled from the related contacts and both the event and the `EventRelation` records are created in one API call. If the `EventRelation` fails, the event is rolled back because it's all done in a single API call.

```
public void createEventNew(Contact[] contacts) {
    String[] contactIds = new String[contacts.size()];
    for (int i = 0; i < contacts.size(); i++) {
        contactIds[i] = contacts[i].getID();
    }
    Event event = new Event();
    event.setSubject("New Event");
    event.setEventWhoIds(contactIds);
    SaveResult[] results = null;
    try {
        results = connection.create(new Event[] {
            task
```

```
});  
} catch (ConnectionException ce) {  
    ce.printStackTrace();  
}  
}
```

Syncing Events with Lightning Sync

Attendee statuses (Accepted or Maybe, Declined, or No Response) sync from Microsoft® Exchange or Google to Salesforce, but not from Salesforce to Exchange or Google. Be wary of creating API flows that update attendee status in Salesforce for users set up to sync both ways. Eventually the original Exchange or Google status overrides the update made in Salesforce.

Shared Field-Level Security for Event and Task Objects

Metadata deployments for the Event object must include the field-level security for the Task object. Shared field-level security prevents each object from changing the field-level security of the associated object.

Metadata deployments that include field-level security for only one of either the Event or Task objects can cause field-level security changes to the other object that aren't reflected in the metadata.

- If field-level security is enabled for one object, then field-level security is enabled for both objects.
- If field-level security is disabled for one object, then it's disabled for both objects.



Note: A missing entry in the metadata is treated as field-level security being disabled.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

EventChangeEvent (API version 44.0)

Change events are available for the object.

EventFeed (API version 20.0)

Feed tracking is available for the object.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

EventLogFile

Represents event log files for event monitoring. The event monitoring product gathers information about your Salesforce org's operational events, which you can use to analyze usage trends and user behavior. This object is available in API version 32.0 and later. The `Interval` and `Sequence` fields are available only in API version 37.0 and later.

You can interact with event monitoring data by querying fields on the EventLogFile object (like `EventType` and `LogDate`). `CreatedDate` tracks when the log file was generated. To view the underlying event data, query the `LogFile` field. The `EventType` determines the schema of this field. Log files don't count towards your org's data or file storage allocations. For more information, see [EventLogFile Supported Event Types](#).

Composite requests that include multiple API requests in a single call aren't supported. In the event of a composite request, EventLogFile captures only the parent request.

-  **Note:** Log data schema for each `EventType` can change. With each new release, use the `LogFileFieldNames` and `LogFileFieldTypes` fields to validate the schema changes. In the unlikely case in which no log files are generated for 24 hours, contact Salesforce Customer Support.
-  **Tip:** Debug and troubleshoot performance issues by correlating logs using the customizable Request Identifier field, available in all Event Monitoring logs. To correlate logs pertaining to an API request call, set the `X-SFDC-REQUEST-ID` header with a 32 character OTEL compatible TraceId or a 22 -character alphanumeric Id. Using SOQL, search for the Event Monitoring logs with this RequestId to correlate the logs and see the unit of work performed as a part of the API transaction.

For details about event monitoring, see the [Trailhead Event Monitoring module](#).

Special Access Rules

Accessing this object requires View Event Log Files and API Enabled user permissions. Users with View All Data permission can view event log files.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

-  **Note:** You can only delete event log file data if you enable the **Delete event monitoring data** setting in Setup.

Fields

Field	Details
<code>ApiVersion</code>	Type double Properties Filter, Sort Description The specific API version for this log file. This field is available in API version 30.0 and later.
<code>EventType</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The event type—API, Login, Report, URI, and so forth. Use to determine which files were generated for your org. For the corresponding <code>LogFile</code> schema, see EventLogFile Supported Event Types.
<code>Interval</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description The generation schedule for the event log file. Possible values are: • Daily • Hourly This field is available in API version 37.0 and later. This field is available in API version 37.0 and later to customers with hourly Event Log Files.
LogDate	Type dateTime Properties Filter, Sort Description The date and time of the log file's creation. For daily event log files, tracks usage activity for a 24-hour period, from 12:00 a.m. to 11:59 p.m. UTC time. For hourly event log files, indicates the hour in which the log file was generated. For example, for events that occur between 11:00 AM and 12:00 PM on 3/7/2016, this field's value is 2016-03-07T11:00:00.000Z.  Note: For hourly event log files, we recommend using <code>CreatedDate</code> to query the date and time that an EventLogFile object was created.
LogFile	Type base64 Description Encoded file data in <code>.csv</code> format. The <code>EventType</code> field defines the schema for this data.
LogFileContentType	Type string Properties Filter, Group, Sort Description The content type of the log file; always <code>.csv</code>.
LogFileFieldNames	Type string Properties Nullable Description The ordered list of fields in the log file data.  Note: <code>LogFileFieldNames</code> and <code>LogFileFieldTypes</code> are specific to each <code>EventType</code>. For example, <code>LogFileFieldNames</code> has a different value for an API <code>EventType</code> and a Login <code>EventType</code>.

Field	Details
LogFileFieldTypes	Type string Properties Nillable Description The ordered list of field types in the log file data (String, Id, and so forth).  Note: LogFileFieldNames and LogFileFieldTypes are specific to each EventType. For example, LogFileFieldTypes has a different value for an API EventType and a Login EventType.
LogFileLength	Type double Properties Filter, Sort Description The log file length in bytes. You can use this field to plan storage needs for your log files.
Sequence	Type int Properties Filter, Group, Sort Description The number for the portion of the event log file data captured in an hour. For 24-hour event log file generation, the value of this field is 0. For hourly event log files, the initial value is 1. This value increases by 1 when events are added in the same hour after the latest event log file is created. The value resets to 1 in the subsequent hour. For example, you have activity between 2:00 and 3:00 PM. Two-log files are generated that contain the event log data for that hour, with Sequence values of 1 and 2. For event log data that occurs at 3:01 PM, the Sequence value resets to 1. This field is available in API version 37.0 and later.

EventLogFile Supported Event Types

The `EventType` field in the EventLogFile object supports these events. Some common fields, such as `CPU_TIME` and `RUN_TIME`, can have null or zero values depending on how the events are generated for a given feature. Sometimes, three quotation marks appear around event data containing special characters in the CSV file. The third quotation mark is necessary for tools and applications to parse the field data at the correct field value boundary.

EventLogFile Supported Event Types

The `EventType` field in the EventLogFile object supports these events. Some common fields, such as `CPU_TIME` and `RUN_TIME`, can have null or zero values depending on how the events are generated for a given feature. Sometimes, three quotation marks appear around event data containing special characters in the CSV file. The third quotation mark is necessary for tools and applications to parse the field data at the correct field value boundary.

We generate some text messages in quotes, as in "example message". To preserve the original value, we add two more quotes and the final value looks like ""example message"" in the CSV file.



Note: The Apex Unexpected Exception, API Total Usage, CORS Violation Record, CSP Violation, Hostname Redirects, Insecure External Assets, Login, and Logout events are available in supported Salesforce editions at no additional cost. To purchase the remaining event types, contact Salesforce.

[Apex Callout Event Type](#)

Apex Callout events contain details about callouts (external requests) during Apex code execution.

[Apex Execution Event Type](#)

Apex Execution events contain details about Apex classes that are used.

[Apex Inline Event Type](#)

This event type is reserved for future use. This object is available in API version 66.0 and later.

[Apex REST API Event Type](#)

Apex REST API events capture information about every Apex REST API request.

[Apex SOAP Event Type](#)

Apex SOAP events contain details about custom SOAP web service calls.

[Apex Trigger Event Type](#)

Apex Trigger events contain details about triggers that fire in an organization.

[Apex Unexpected Exception Event Type](#)

The Apex Unexpected Exception event type captures information about unexpected exceptions in Apex code execution. This event type is available in the EventLogFile object in API version 45.0 and later. Unexpected exception information is not captured in the EventLogFile object with `@IsTest` and anonymous Apex.

[API Total Usage](#)

API Total usage events contain details about Platform SOAP API, Platform REST API, and Bulk API requests.

[Asynchronous Report Run Event Type](#)

Asynchronous Report Run events are created for reporting requests that are scheduled. This category includes dashboard refreshes, asynchronous reports, schedule reports, and analytics snapshots.

[Aura Request Event Type](#)

Aura Request events contain details of requests to Apex methods from Aura and Lightning web components. For example, you can benchmark request time or identify the URI of an unsuccessful request.

[Blocked Redirect Event Type](#)

Blocked redirect events capture information about blocked redirections from Salesforce to untrusted and malformed URLs. The Blocked Redirect event type is available in the EventLogFile object in API version 63.0 and later.

[Bulk API Event Type](#)

Bulk API events contain details about Bulk API requests.

[Bulk API Request Event Type](#)

The Bulk API request event captures when Bulk API requests are received to create a job, update a job, create a batch, update a batch, and when a job completes.

[Bulk API 2.0 Event Type](#)

BulkApi2 events contain details about Bulk API 2.0 requests.

[Change Set Operation Event Type](#)

Change Set Operation events contain information from change set migrations.

Composite API Event Type

Composite API events contain details about composite API requests. One composite API event is generated for each composite API and composite graph API call. This event type is available in API version 64.0 and later.

Composite API Subrequest Event Type

Composite API subrequest events contain details about composite API subrequests. One composite API subrequest event is generated for each subrequest or collated set of subrequests. For example, if a composite API request contains five subrequests and four of the subrequests are collated, then two composite API subrequest events are generated. This example also applies to composite graph API. This event type is available in API version 64.0 and later.

Concurrent Long-Running Apex Limit Event Type

Concurrent Long-Running Apex Limit events contain information about long-running concurrent Apex requests in your org that Salesforce terminated after reaching your org's concurrency limit. Requests with an established Apex context that execute for 5 seconds are counted towards your org's limit of concurrent long-running requests. (Asynchronous requests don't count towards the limit.) When the long-running requests exceed the org default limit, all new Apex invocation requests are denied. This event type is available in the EventLogFile object in API version 45.0 and later.

Console Event Type

Console events contain information about the performance and use of Salesforce Consoles. The Console events are logged whenever a Console tab is opened with a sidebar component. Outside of that, when Console tabs are opened, a regular view record detail event is served just like in Salesforce Classic.

Content Distribution Event Type

Content Distribution events contain information about content distributions and deliveries to users.

Content Document Link Event Type

Content Document Link events contain sharing information for content documents.

Content Transfer Event Type

Content Transfer events contain information about content transfer events, such as downloads, uploads, and previews. This information includes events performed on files and attachments to records.

Continuation Callout Summary Event Type

Continuation Callout Summary events contain information about all of the asynchronous callouts performed during a transaction, their response status codes, execution times, and URL endpoint destinations. This event type is available in the EventLogFile object in API version 43.0 and later.

CORS Violation Record Event Type

CORS Violation Record events capture information about Cross-Origin Resource Sharing (CORS) violations. Cross-origin requests to Lightning apps are blocked unless the request comes from a URL listed in your CORS allowlist.

CSP Violation Event Type

CSP violation events capture details about blocked resource requests from Lightning Experience pages based on your content security policy (CSP). The CSP Violation event type is available in the EventLogFile object in API version 63.0 and later.

Dashboard Event Type

Dashboard events contain details about report requests from dashboards. These requests are triggered by dashboard refreshes, subscriptions, and filter changes.

Database Save Event Type

Database Save events track when records are created, updated, or deleted. This object is available in API version 63.0 and later.

Document Attachment Downloads Event Type

Document Attachment Downloads events contain details of document and attachment downloads.

External Cross-Org Callout Event Type

External Cross-Org Callout events represent external data callouts via the cross-org adapter for Salesforce Connect. This event type is available in the EventLogFile object in API version 40.0 and later.

External Custom Apex Callout Event Type

External Custom Apex Callout events represent external data callouts via custom adapters for Salesforce Connect. This event type is available in the EventLogFile object in API version 40.0 and later.

External Data Source Callout Event Type

External Data Source Callout events represent external data callouts via the Salesforce Connect adapters for Amazon DynamoDB and Amazon Athena. This event type is available in the EventLogFile object in API version 56.0 and later.

External OData Callout Event Type

External OData Callout events represent external data callouts via the OData 2.0 and OData 4.0 adapters for Salesforce Connect. This event type is available in the EventLogFile object in API version 40.0 and later.

Flow Execution Event Type

Flow Execution events contain information about flows that were executed including details such as total execution time, number of interviews, and number of errors.

Group Membership Event Type

Group Membership events capture details about changes to public group and queue membership, such as when members are added to or removed from the public group or queue.

Hostname Redirects Event Type

Hostname Redirect events contain details about blocked and successful redirections for your previous My Domain hostnames. The Hostname Redirects event type is available in the EventLogFile object in API version 56.0 and later.

Insecure External Assets Event Type

Insecure External Assets events contain information about external assets. External assets include images or videos accessed by users over an insecure HTTP protocol. The event lists all your Salesforce pages that contain assets hosted insecurely on third-party sites that users loaded with a Chrome, Firefox, Microsoft Edge, or Safari browser. The `INSECURE_URI` field contains the URI being used to load the asset insecurely. The Insecure External Assets event type is available in the EventLogFile object in API version 42.0 and later.

Insufficient Access Event Type

Insufficient Access events contain details about errors relating to insufficient account, case, contact, and opportunity record access, so that you can troubleshoot and resolve access issues for your users.

Invocable Action Event Type

Invocable Action events capture the calls to Salesforce Invocable Actions. This is particularly useful to monitor actions invoked during Agentforce flows. This event type is available in API versions 64.0 and later.

Knowledge Article View Event Type

Knowledge Article View events contain user activity with your knowledge base.

Lightning Error Event Type

Lightning Error events represent errors that occurred during user interactions with Lightning Experience and the Salesforce mobile app. This event type is available in the EventLogFile object in API version 39.0 and later.

Lightning Interaction Event Type

Lightning Interaction events track user actions in Lightning Experience and the Salesforce mobile app, such as the user clicking, tapping, or scrolling on a page. This event type is available in the EventLogFile object in API version 39.0 and later.

[Lightning Logger Event Type](#)

Lightning Logger events contain information from observed Lightning component logs. This event type is available in the EventLogFile object in API version 58.0 and later.

[Lightning Page View Event Type](#)

Lightning Page View events represent information about the page on which the event occurred in Lightning Experience and the Salesforce mobile app, such as the page's load time. This event type is available in the EventLogFile object in API version 39.0 and later.

[Lightning Performance Event Type](#)

Lightning Performance events track trends in Lightning Experience and Salesforce mobile app performance. This event type is available in the EventLogFile object in API version 39.0 and later.

[Login Event Type](#)

Login events contain details about your org's user login history.

[Login As Event Type](#)

Login As events contain details about what a Salesforce admin did while logged in as another user.

[Logout Event Type](#)

Contains details of user sessions ending or being revoked.

[Metadata API Operation Event Type](#)

Metadata API Operation events contain details of Metadata API retrieval and deployment requests.

[Multiblock Report Event Type](#)

Multiblock Report events contain details about Joined Report reports.

[Named Credential Event Type](#)

The Named Credential event type captures information about Apex callouts that use named credentials as their endpoints. Use this event type to audit the installed managed packages that use named credentials. If you don't recognize the package namespace in the named credential event log file, then you can investigate whether a security breach has occurred. This event type is available in the EventLogFile object in API version 53.0 and later.

[One Commerce Usage Event Type](#)

One Commerce Usage events capture information about your Commerce instance. This event type is available in the EventLogFile object in API version 51.0 and later.

[Package Install Event Type](#)

Package Install events contain details about package installation in the organization.

[Permission Update Event Type](#)

Permission update events represent changes to object, field, and user permissions and setup entity access that occur in profiles and permission sets. The event type also tracks if you clone profiles or change whether session activation is required in permission sets or permission set groups.

[Platform Encryption Event Type](#)

Platform Encryption event contains information about tenant secret and derived encryption key usage. This event type is available in API versions 41.0 and later.

[Pricing Event Type](#)

Pricing events contain information about pricing procedures that were executed, including details such as pricing procedures used, the pricing APIs, and pricing details and status.

[Queued Execution Event Type](#)

Queued Execution events contain details about queued executions—for example, batch Apex.

[Report Event Type](#)

Report events contain information about what happened when a user ran a report. This event type includes all activity that's in the Report Export event type, plus more. For example, it has user activity for reports exported as both Formatted Report and Details Only output.

[Report Export Event Type](#)

Report Export events contain details about reports that a user exported. For example, this event type captures when a user exports a report as Details Only output. But it doesn't capture reports that users export as Formatted Report or XLSX Detail output. For that data, see the Report event type.

[REST API Event Type](#)

REST API events contain details about REST-specific requests.

[Sandbox Event Type](#)

Sandbox events contain details about sandbox copies.

[Search Event Type](#)

Search events contain details about the user's search query. All searches within the app, including Experience Cloud sites, are included. However, unauthenticated users won't have a unique Salesforce user ID.

[Search Click Event Type](#)

Search Click events contain details about the user's interaction with the search results in the search results page. Interactions with search results in the instant result dialog are not recorded by this event. All searches within the app, including Experience Cloud sites, are included. However, unauthenticated users won't have a unique Salesforce user ID.

[Sites Event Type](#)

Sites events contain details of Site.com requests. Requests can originate from the browser (UI).

[SOAP API Event Type](#)

SOAP API events contain details about your org's SOAP API request activity.

[Time-Based Workflow Event Type](#)

Time-Based Workflow events contain details about queue activity monitoring.

[Transaction Security Event Type](#)

Transaction Security events contain details about policy execution. This event type is supported in API version 55.0 and later.

[UI Telemetry Navigation Timing Event Type](#)

UI Telemetry Navigation Timing events capture network performance metrics related to page navigation. The event extends from the [UI Telemetry Resource Timing Event](#) on page 2412 and includes requests initiated with either the [Fetch API](#) or the [XMLHttpRequest API](#). This object is available in API version 61.0 and later.

[UI Telemetry Resource Timing Event](#)

UI Telemetry Resource Timing events capture network performance metrics related to loading an application's resources. The event includes requests initiated with either the [Fetch API](#) or the [XMLHttpRequest API](#). This object is available in API version 61.0 and later.

[Unique Query Event Type](#)

Unique Query events capture specific search queries (SOQL), filter IDs, and report IDs that are processed, along with the underlying database queries (SQL). This event type is available in API versions 64.0 and later.

[URI Event Type](#)

URI events contain details about user interaction with the web browser UI.

[Visualforce Request Event Type](#)

Visualforce Request events contain details of Visualforce requests. Requests can originate from the browser (UI).

[Wave Change Event Type](#)

Wave Change events represent route or page changes made in the CRM Analytics user interface. A Wave Change event type is captured every time the user opens a new CRM Analytics asset or tab, switches between tabs, or changes dashboard pages. Wave Change events are logged when opening new tabs and switching back to previously opened tabs.

[Wave Download Event Type](#)

Wave Download events represent downloads made from lens explorations and dashboard widgets in the CRM Analytics user interface. A Wave Download event type is captured when a user downloads images (.png), Microsoft® Excel® data (.xls), or comma-separated values (.csv) files.

[Wave Interaction Event Type](#)

Wave Interaction events represent route or page changes made in the CRM Analytics user interface. A Wave Interaction event type is captured when a tab is closed. It also collates the interaction statistics over the life of the tab, including total open time, read time, and so on. These statistics are aggregated as you go to other tabs and return, and logged only once when the tab is closed.

[Wave Performance Event Type](#)

Wave Performance events help you track trends in your Analytics performance.

SEE ALSO:

[EventLogFile](#)

Apex Callout Event Type

Apex Callout events contain details about callouts (external requests) during Apex code execution.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
BOT_IDENTIFIER	Type string Description The ID of the bot.
BOT_SESSION_IDENTIFIER	Type string Description The bot session ID.
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.

CPU_TIME

Type

Number

Description

The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.

EVENT_TYPE

Type

String

Description

The type of event. The value is always `ApexCallout`.

LOGIN_KEY

Type

String

Description

The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.

For example: `GeJCSym5eyvtEK2I`.

METHOD

Type

String

Description

The HTTP method of the callout.

Example

For example: `GET`, `POST`, `PUT`, and so on.

ORGANIZATION_ID

Type

Id

Description

The 15-character ID of the organization.

For example: `00D0000000000123`.

PLANNER_IDENTIFIER

Type

string

Description

The ID of the agent planner.

REQUEST_ID

Type

String

	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code> . For example: <code>3nWgxWbDKWWDIk0FKfF5DV</code> .
<code>REQUEST_SIZE</code>	Type Number Description The size of the callout request body, in bytes.
<code>RESPONSE_SIZE</code>	Type Number Description The size of the callout response, in bytes.
<code>RUN_TIME</code>	Type Number Description Not used for this event type. Use the <code>TIME</code> field instead.
<code>SESSION_KEY</code>	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: <code>d7DEq/ANa7nZZVD</code> .
<code>STATUS_CODE</code>	Type Number Description The HTTP status code for the response.
<code>SUCCESS</code>	Type Boolean Description Indicates if the HTTP callout was sent and a response was returned (1) or not (0).
<code>TIME</code>	Type Number

	Description The amount of time that the request took in milliseconds (ms).
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
TYPE	Type String Description The type of Apex callout. For example: REST or AJAX.
URI	Type String Description The URI of the page that's receiving the request. For example: /home/home.jsp.
URI_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the URI of the page that's receiving the request.
URL	Type String Description The callout endpoint URL. Example www.salesforce.com

USER_ID

Type
Id**Description**

The 15-character ID of the user who's using Salesforce services through the UI or the API.

For example: 005300000009M943

USER_ID_DERIVED

Type
Id**Description**

The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API.

For example: 00590000000I1SNIA0.

SEE ALSO:

[EventLogFile Supported Event Types](#)[EventLogFile](#)

Apex Execution Event Type

Apex Execution events contain details about Apex classes that are used.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field**Details**

BOT_IDENTIFIER

Type
string**Description**

The ID of the bot.

BOT_SESSION_IDENTIFIER

Type
string**Description**

The bot session ID.

CALLOUT_TIME

Type
Number**Description**

Time spent waiting on webservice callouts, in milliseconds.

CLIENT_IP

Type

String

Description

The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". If the user's session context isn't available, this field returns a blank value.

CPU_TIME

Type

Number

Description

The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.

DB_TOTAL_TIME

Type

Number

Description

Time (in milliseconds) spent waiting for database processing in aggregate for all operations in the request. Compare this field to `CPU_TIME` to determine whether performance issues are occurring in the database layer or in your own code.

ENTRY_POINT

Type

String

Description

The entry point for this Apex execution.

Example

- `GeneralCloner.cloneAndInsertRecords`
- VF- /apex/CloneUser

EVENT_TYPE

Type

String

Description

The type of event. The value is always `ApexExecution`.

EXEC_TIME

Type

Number

Description

The end-to-end Apex execution time (in milliseconds).

IS_LONG_RUNNING_REQUEST

Type

Boolean

	Description Indicates whether the request is counted against your org's concurrent long-running Apex request limit (<code>true</code>) or not (<code>false</code>).  Note: Asynchronous Apex jobs (batch, queueable, scheduled, and future), background processes, and bulk API requests aren't counted against the concurrent long-running limit.
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: <code>GeJCsym5eyvtEK2I</code>.
NUMBER_SOQL_QUERIES	Type Number Description The number of SOQL queries that were executed during the event. This value is the aggregate across all namespaces, and can exceed the per-namespace limits. For test executions, the aggregate total value across all test methods executed in the request is used. If you're using this value to track limit consumption, consider filtering out test execution quiddities (indicated by the <code>QUIDDITY</code> field).
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: <code>00D000000000123</code>.
PLANNER_IDENTIFIER	Type string Description The ID of the agent planner.
QUIDDITY	Type String Description The type of outer execution associated with this event.

Example

- A–ACS Batch Apex
- B–Bulk API and Bulk API 2.0
- BA–Start method of a Batch Apex job
- C–Scheduled Apex
- CI–Commerce Integration
- DI– Discoverable Login page
- E–Inbound Email Service
- F–Future
- FC–Function Callback
- H–Apex REST
- I–Invocable Action
- K–Quick Action
- L–Lightning
- M–Remote Action
- P–Not used in API version 63.0 and later.
- PEP–Platform Event Publish Callback
- PI–Post install script for a managed package
- Q–Queueable
- QTXF–Transaction Finalizer for Queueable
- R–Synchronous uncategorized (which is where all transactions not specified elsewhere end up)
- S–QueryLocator Batch Apex (Batch Apex jobs run faster when the start method returns a QueryLocator object that doesn't include related records via a subquery. See Batch Apex Best Practices in [Using Batch Apex](#).)
- TA–Tests Async
- TD–Tests Deployment
- TS–Tests Synchronous
- UD–Undefined is the default when an event hasn't been assigned a more descriptive quiddity.
- V–Visualforce
- W–SOAP Webservices
- X–Execute Anonymous

 **Note:** Implementations of the Process.Plugin interface use the quiddity value **R**.

REQUEST_ID

Type
String

	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code> . For example: <code>3nWgxWbDKWWDIk0FKfF5DV</code> .
<code>RUN_TIME</code>	Type Number Description The amount of time that the request took in milliseconds. Requests with a value over five seconds are considered long-running requests for the purposes of the Concurrent Long-Running Apex Limit.  Note: HTTP callout processing time isn't included when calculating the 5-second limit. We pause the timer for the callout and resume it when the callout completes.
<code>SESSION_KEY</code>	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: <code>d7DEq/ANa7nNZZVD</code> .
<code>TIMESTAMP</code>	Type String Description The access time of Salesforce services in GMT. For example: <code>20130715233322.670</code> .
<code>TIMESTAMP_DERIVED</code>	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (<code>YYYY-MM-DDTHH:MM:SS.sssZ</code>). For example: <code>2015-07-27T11:32:59.555Z</code> . Timezone is GMT.
<code>URI</code>	Type String Description The URI of the page that's receiving the request.

For example: /home/home.jsp.

URI_ID_DERIVED

Type

ID

Description

The 18-character case insensitive ID of the URI of the page that's receiving the request.

USER_ID

Type

Id

Description

The 15-character ID of the user who's using Salesforce services through the UI or the API.

For example: 00530000009M943

USER_ID_DERIVED

Type

Id

Description

The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API.

For example: 00590000000I1SNIA0.

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Apex Inline Event Type

This event type is reserved for future use. This object is available in API version 66.0 and later.



Note: Because this event type is reserved for future use, it captures no data.

Apex REST API Event Type

Apex REST API events capture information about every Apex REST API request.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#). For information about Apex REST, see [Introduction to Apex REST](#).

Fields

Field

Details

CLIENT_IP

Type

String

Description

The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP".

For example: 96.43.144.26.

CONNECTED_APP_ID

Type

String

Description

The 15-character ID of the connected app associated with the API call. For example, 0H4RM00000000Kx0AI.

CLIENT_NAME

Type

String

Description

The name of the client that's using Salesforce services.

CPU_TIME

Type

Number

Description

The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.

DB_BLOCKS

Type

Number

Description

Indicates how much activity is occurring in the database. A high value for this field suggests that adding indexes or filters on your queries would benefit performance.

DB_CPU_TIME

Type

Number

Description

The CPU time in milliseconds to complete the request. Indicates the amount of activity taking place in the database layer during the request.

DB_TOTAL_TIME

Type

Number

	Description The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and <code>DB_CPU_TIME</code> . Compare this field to <code>CPU_TIME</code> to determine whether performance issues are occurring in the database layer or in your own code.
ENTITY_NAME	Type Set Description API objects that are accessed. For example: <code>Account</code> , <code>Opportunity</code> , <code>Contact</code> , and so on.
EVENT_TYPE	Type String Description The type of event. The value is always <code>ApexRestApi</code> .
EXCEPTION_MESSAGE	Type String Description The returned exception message, used to debug issues. Provide this message when seeking support.
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: <code>GeJCsym5eyvtEK2I</code> .
MEDIA_TYPE	Type String Description The media type of the response.
METHOD	Type String Description The HTTP method of the request. For example: <code>GET</code> , <code>POST</code> , <code>PUT</code> , and so on.

NUMBER_FIELDS

Type

Number

Description

The number of fields or columns, where applicable.

ORGANIZATION_ID

Type

Id

Description

The 15-character ID of the organization.

For example: 00D0000000000123.

QUERY

Type

String

Description

The data that was queried.

REQUEST_SIZE

Type

Number

Description

The size of the callout request body, in bytes.

REQUEST_STATUS

Type

String

Description

The status of the request for a page view or user interface action.

For example:

- S—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned.
- F—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only.
- U—Undefined
- A—Authorization Error
- R—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page.
- N—Not Found. 404 error.

This field can have a blank value.

REQUEST_ID

Type

String

	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. For example: 3nWgxWbDKWWDIk0FKfF5DV.
RESPONSE_SIZE	Type Number Description The size of the callout response, in bytes.
ROWS_PROCESSED	Type Number Description The number of rows that were processed in the request. For example: 150.
RUN_TIME	Type Number Description The amount of time that the request took in milliseconds.
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
STATUS_CODE	Type Number Description The HTTP status code for the response.
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime

	Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
URI	Type String Description The URI of the page that's receiving the request. For example: /home/home.jsp.
URI_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the URI of the page that's receiving the request.
USER_AGENT	Type Number Description The numeric code for the type of client used to make the request (for example, the browser, application, or API).
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API. For example: 00590000000I1SNIA0.
USER_TYPE	Type String Description The category of user license. Possible values are:

- `CsnOnly`—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users.
- `CspLitePortal`—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site.
- `CustomerSuccess`—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal.
- `Guest`—Users whose access is limited so that your customers can view and interact with your site without logging in.
- `PowerCustomerSuccess`—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy.
- `PowerPartner`—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site.
- `SelfService`—Users whose access is limited because they're organization customers and access the application through a self-service portal.
- `Standard`—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Apex SOAP Event Type

Apex SOAP events contain details about custom SOAP web service calls.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
-------	---------

CLASS_NAME

Type

String

Description

The Apex class name. If the class is part of a managed package, this string includes the package namespace.

CLIENT_IP

Type

String

Description

The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP".

For example: 96 . 43 . 144 . 26.

CLIENT_NAME

Type

String

Description

The name of the client that's using Salesforce services. This field is an optional parameter that can be passed in API calls. If blank, the caller didn't specify a client in the CallOptions header.

CPU_TIME

Type

Number

Description

The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.

DB_TOTAL_TIME

Type

Number

Description

Time (in milliseconds) spent waiting for database processing in aggregate for all operations in the request. Compare this field to `CPU_TIME` to determine whether performance issues are occurring in the database layer or in your own code.

EVENT_TYPE

Type

String

Description

The type of event. The value is always `ApexSoap`.

LIMIT_USAGE_PERCENT

Type

Number

	Description The percentage of Apex SOAP calls that were made against the organization's limit.
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
METHOD_NAME	Type String Description The name of the calling Apex method.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: 00D000000000123.
QUERY	Type String Description The SOQL query, if one was performed.
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. For example: 3nWgxWbDKWWDIk0FKfF5DV.
REQUEST_STATUS	Type String Description The status of the request for a page view or user interface action. For example:

- S—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned.
- F—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only.
- U—Undefined
- A—Authorization Error
- R—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page.
- N—Not Found. 404 error.

This field can have a blank value.

RUN_TIME

Type

Number

Description

The amount of time that the request took in milliseconds.

Requests with a value over five seconds are considered long-running requests for the purposes of the Concurrent Long-Running Apex Limit.



Note: HTTP callout processing time isn't included when calculating the 5-second limit. We pause the timer for the callout and resume it when the callout completes.

SESSION_KEY

Type

String

Description

The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.

For example: d7DEq/ANa7nNZZVD.

TIMESTAMP

Type

String

Description

The access time of Salesforce services in GMT.

For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type

DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

URI

Type

String

Description

The URI of the page that's receiving the request.

For example: /home/home.jsp.

URI_ID_DERIVED

Type

ID

Description

The 18-character case insensitive ID of the URI of the page that's receiving the request.

USER_ID

Type

Id

Description

The 15-character ID of the user who's using Salesforce services through the UI or the API.

For example: 00530000009M943

USER_ID_DERIVED

Type

Id

Description

The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API.

For example: 00590000000I1SNIA0.

USER_TYPE

Type

String

Description

The category of user license.

Possible values are:

- **CsnOnly**—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users.
- **CspLitePortal**—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site.
- **CustomerSuccess**—Customer Success license. Users whose access is limited because they're organization

customers and access the application through a customer portal.

- **Guest**—Users whose access is limited so that your customers can view and interact with your site without logging in.
- **PowerCustomerSuccess**—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy.
- **PowerPartner**—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site.
- **SelfService**—Users whose access is limited because they're organization customers and access the application through a self-service portal.
- **Standard**—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

SEE ALSO:

- [EventLogFile Supported Event Types](#)
- [EventLogFile](#)

Apex Trigger Event Type

Apex Trigger events contain details about triggers that fire in an organization.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
BOT_IDENTIFIER	Type String Description The ID of the bot.
BOT_SESSION_IDENTIFIER	Type String Description The bot session ID.

CLIENT_IP

Type

String

Description

The IP address of the client that is using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP".

For example: 96.43.144.26.

CPU_TIME

Type

Number

Description

The CPU time in milliseconds is used to complete the request. This field indicates the amount of activity taking place in the app server layer.

DB_TOTAL_TIME

Type

Number

Description

Time (in milliseconds) spent waiting for database processing in aggregate for all operations in the request. Compare this field to CPU_TIME to determine whether performance issues are occurring in the database layer or in your own code.

ENTITY_NAME

Type

String

Description

The name of the object affected by the trigger.

EVENT_TYPE

Type

String

Description

The type of event. The value is always ApexTrigger.

EXEC_TIME

Type

Number

Description

The end-to-end Apex execution time (in milliseconds).

LOGIN_KEY

Type

String

Description

The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.

	For example: GeJCSym5eyvtEK2I.
ORGANIZATION_ID	Type ID Description The 15-character ID of the organization. For example: 00D0000000000123.
PLANNER_IDENTIFIER	Type String Description The ID of the agent planner.
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. For example: 3nWgxWbDKWWDIk0FKfF5DV.
REQUEST_STATUS	Type String Description The status of the request for a page view or user interface action. For example: • S—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned. • F—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only. • U—Undefined • A—Authorization Error • R—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page. • N—Not Found. 404 error. This field can have a blank value.
RUN_TIME	Type Number

	Description This field is always null. To view the end-to-end Apex execution time (in milliseconds), refer to the <code>EXEC_TIME</code> field.
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nZZVD.
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. The timezone is GMT.
TRIGGER_ID	Type String Description The 15-character ID of the trigger that was fired.
TRIGGER_NAME	Type String Description For triggers coming from managed packages, <code>TRIGGER_NAME</code> includes a namespace prefix separated with a <code>.</code> character. If no namespace prefix is present, the trigger is from an unmanaged trigger. Examples: <code>examplePackage.managedExampleTrigger</code> - Managed trigger from the <code>examplePackage</code> namespace <code>unmanagedExampleTrigger</code> - Unmanaged trigger

TRIGGER_TYPE

Type

String

Description

The type of this trigger.

Possible Values

- AfterInsert
- AfterUpdate
- BeforeInsert
- BeforeUpdate

URI

Type

String

Description

The URI of the page that's receiving the request.

For example: /home/home.jsp.

URI_ID_DERIVED

Type

ID

Description

The 18-character case insensitive ID of the URI of the page that's receiving the request.

USER_ID

Type

ID

Description

The 15-character ID of the user who is using Salesforce services through the UI or the API.

For example: 00530000009M943

USER_ID_DERIVED

Type

ID

Description

The 18-character case insensitive ID of the user who is using Salesforce services through the UI or the API.

For example: 00590000000I1SNIA0.

USER_TYPE

Type

String

Description

The category of user license.

Possible values are:

- `CsnOnly`—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users.
 - `CspLitePortal`—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site.
 - `CustomerSuccess`—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal.
 - `Guest`—Users whose access is limited so that your customers can view and interact with your site without logging in.
 - `PowerCustomerSuccess`—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy.
 - `PowerPartner`—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site.
 - `SelfService`—Users whose access is limited because they're organization customers and access the application through a self-service portal.
 - `Standard`—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.
-

SEE ALSO:[EventLogFile Supported Event Types](#)[EventLogFile](#)

Apex Unexpected Exception Event Type

The Apex Unexpected Exception event type captures information about unexpected exceptions in Apex code execution. This event type is available in the EventLogFile object in API version 45.0 and later. Unexpected exception information is not captured in the EventLogFile object with `@IsTest` and anonymous Apex.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
EVENT_TYPE	Type String Description The type of event. The value is always <code>ApexUnexpectedException</code>.
EXCEPTION_CATEGORY	Type String Description The category of the unexpected Apex exception. Provides a breakdown of unhandled exceptions based on the type. For example, the <code>LimitException</code> exception type is split into subcategories that indicate if you exceeded a limit, such as the total heap size or CPU time. Possible values: - Subcategories of <code>LimitException</code> that indicate the Apex limit you've exceeded. Examples: <code>LimitException: CpuTime</code>: Maximum CPU time on the Salesforce servers. <code>LimitException: HeapSize</code>: Total heap size. <code>LimitException: Queries</code>: Total number of SOQL queries issued. <code>LimitException: QueryRows</code>: Total number of records retrieved by SOQL queries. <code>LimitException: DmlStatements</code>: Total number of DML statements issued. <code>LimitException: Callouts</code>: Total number of callouts (HTTP requests or web services calls) in a transaction. - See Execution Governors and Limits for other limits. <code>CustomException</code>: Unhandled custom exception. - An Apex exception that isn't limit-related; see Exception Class and Built-In Exceptions This field is available in API version 57.0 and later. Example <code>LimitException: CpuTime</code>
EXCEPTION_MESSAGE	Type Text Description The exception's message. Example Divide by 0

Field	Details
EXCEPTION_TYPE	Type String Description The class type of the unexpected exception. Example <code>System.MathException</code>
ORGANIZATION_ID	Type Id Description The 15-character ID of the org. For example: 00D000000000123.
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. For example: 3nWgxWbDKWWDIk0FKfF5DV.
STACK_TRACE	Type Text Description The stack trace for the exception.  Note: If the exception is thrown from a managed package, STACK_TRACE is omitted. Example <pre>Class.OpportunityUtility.insert: line 22, column 1 AnonymousBlock: line 1, column 1</pre>
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 2024-08-08T06:08:02.755+0000.
TIMESTAMP_DERIVED	Type DateTime

Field	Details
	Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.
USER_ID_DERIVED	Type Id Description The 18-character case-insensitive ID of the user who's using Salesforce services through the UI or the API. For example: 00590000000I1SNIA0.

SEE ALSO:

[EventLogFile Supported Event Types](#)[EventLogFile](#)

API Total Usage

API Total usage events contain details about Platform SOAP API, Platform REST API, and Bulk API requests.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
API_CLIENT_CATEGORY	Type String Description The category of the client making the API request. Possible values are: • <code>AGENTFORCE__AGENT</code>—API request is from an Agentforce agent. • <code>EXTERNAL_APPLICATION</code>—API request is from an external app defined in the org. • <code>LIGHTNING_UI</code>—API request is from the Lightning UI.

- **SALESFORCE**—API request is from an internal Salesforce app or service.
- **UNKNOWN**—API request is from an unrecognized category.

API_FAMILY

Type

String

Description

The API family. Possible values are REST, SOAP, Bulk, or ApexREST. ApexREST indicates Apex REST, Agentforce Apex REST, or Agentforce AuraEnabled calls.

API_RESOURCE

Type

String

Description

The API method or resource. For example, `describeSObjects` for SOAP, or `/v21.0/objects/Account/001xx000003DGQW` for REST.

API_VERSION

Type

Number

Description

The API version. For example, 21.0.

BOT_IDENTIFIER

Type

string

Description

The ID of the bot.

BOT_SESSION_IDENTIFIER

Type

string

Description

The bot session ID.

CLIENT_IP

Type

String

Description

The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP".

For example: 96.43.144.26.

CLIENT_NAME

Type

String

	Description The name of the client making the API request. Includes values passed via the Sforce-Call-Options header.
CONNECTED_APP_ID	Type String Description The ID of the connected app making the API request. If the connected app ID includes the prefix <i>0H4</i> , append it to the connected app ID in the My Domain URL to access app details (https://MyDomainName.my.salesforce.com/0H4xxxxxxxxxxx) If, however, the connected app ID uses the prefix <i>888</i> , contact Salesforce Customer Support for app details.
CONNECTED_APP_NAME	Type String Description The name of the connected app making the API request.
COUNTS_AGAINST_API_LIMIT	Type Boolean Description Whether the request counted against the API limit (<code>true</code>) or not (<code>false</code>).
ENTITY_NAME	Type Set Description The name of the object accessed by the API request. For example: <code>Account</code> , <code>Opportunity</code> , <code>Contact</code> , and so on.
EVENT_TYPE	Type String Description The type of event. The value is always <code>ApiTotalUsage</code> .
HTTP_METHOD	Type String Description The HTTP method. For example, <code>GET</code> .

ORGANIZATION_ID

Type
Id**Description**

The 15-character ID of the organization.
For example: 00D000000000123.

PLANNER_IDENTIFIER

Type
string**Description**

The ID of the agent planner.

REQUEST_ID

Type
String**Description**

The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.
For example: 3nWgxWbDKWWDIk0FKfF5DV.

STATUS_CODE

Type
Number**Description**

The HTTP response status code for the request.

TIMESTAMP

Type
String**Description**

The access time of Salesforce services in GMT.
For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type
DateTime**Description**

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).
For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

USER_ID

Type
Id**Description**

The 15-character ID of the user who's using Salesforce services through the API.

For example: 00530000009M943

USER_NAME

Type

String

Description

The username of the user who's using Salesforce services through the API.

Asynchronous Report Run Event Type

Asynchronous Report Run events are created for reporting requests that are scheduled. This category includes dashboard refreshes, asynchronous reports, schedule reports, and analytics snapshots.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field

Details

AVERAGE_ROW_SIZE

Type

Number

Description

The average row size of all rows in the Asynchronous Report Run event, in bytes. A large average size, coupled with a high ROW_COUNT, can indicate that a user is downloading information for fraudulent purposes. For example, a salesperson who downloads all sales leads before departing for a competitor.

Example

700

CLIENT_IP

Type

String

Description

The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP".

For example: 96.43.144.26.

CPU_TIME

Type

Number

Description

The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.

DASHBOARD_ID

Type

String

Description

The 15-character ID of the dashboard that was run.

DB_TOTAL_TIME

Type

Number

Description

The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and DB_CPU_TIME. Compare this field to CPU_TIME to determine whether performance issues are occurring in the database layer or in your own code.

DB_BLOCKS

Type

Number

Description

Indicates how much activity is occurring in the database. A high value for this field suggests that adding indexes or filters on your queries would benefit performance.

DB_CPU_TIME

Type

Number

Description

The CPU time in milliseconds to complete the request. Indicates the amount of activity taking place in the database layer during the request.

DISPLAY_TYPE

Type

String

Description

The report display type, indicating the run mode of the report.

Possible values are:

- D—Dashboard
- S—Show Details
- H—Hide Details

ENTITY_NAME

Type

String

Description

The name of the object affected by the trigger.

EVENT_TYPE

Type

String

	Description The type of event. The value is always <code>AsynchronousReportRun</code> .
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: <code>GeJCsym5eyvtEK2I</code> .
NUMBER_BUCKETS	Type Number Description The number of buckets that were used in the report.
NUMBER_COLUMNS	Type Number Description The number of columns in the report.
NUMBER_EXCEPTION_FILTERS	Type Number Description The number of exception filters that are used in the report.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: <code>00D000000000123</code> .
ORIGIN	Type String Description The context in which the report executed, such as from a UI (Classic, Lightning, Mobile), through an API (synchronous, asynchronous, Apex), or through a dashboard. Possible Values • <code>ReportOpenedFromMobileDashboard</code>: Report executed when a user clicked a dashboard component on a mobile device and drilled down to a report.

- `DashboardComponentUpdated`: Report executed when a user refreshed a dashboard component.
- `DashboardComponentPreviewed`: Report executed from a Lightning dashboard component preview.
- `ReportRunUsingSynchronousApi`: Report executed from a synchronous API.
- `ReportRunUsingAsynchronousApi`: Report executed from an asynchronous API.
- `ReportRunUsingApexSynchronousApi`: Report executed from the synchronous Apex API.
- `ReportRunUsingApexAsynchronousApi`: Report executed from the asynchronous Apex API.
- `ReportExported`: Report executed from a printable view or report export that was not asynchronous nor an API export.
- `ReportRunFromClassic`: Report executed from the Run Report option of Salesforce Classic.
- `ReportRunFromMobile`: Report executed from the Run Report option of the mobile Salesforce app.
- `ReportRunFromLightning`: Report executed from the Run option in Lightning Experience from a non-mobile browser.
- `ReportRunFromRestApi`: Report executed from the REST API.
- `ReportPreviewed`: Report executed when a user got preview results while using the report builder.
- `ReportScheduled`: Report was scheduled.
- `ProbeQuery`: Report executed from a probe query.
- `ReportRunFromReportingSnapshot`: Report executed through Snapshot Analytics.
- `ReportExportedAsynchronously`: Report was exported asynchronously.
- `ReportExportedUsingExcelConnector`: Report was exported using the Excel connector.
- `ChartRenderedOnVisualforcePage`: Report executed from a rendered chart on a VisualForce Page.
- `ChartRenderedInEmbeddedAnalyticsApp`: Report executed from a rendered chart in an embedded Analytics app.
- `ReportRunAndNotificationSent`: Report executed through the notifications API.
- `ChartRenderedOnHomePage`: Report executed from a rendered chart on the home page.

- **ReportResultsAddedToWaveTrending:** Report executed when a user trended a report in CRM Analytics.
- **ReportAddedToCampaign:** Report was added from an Add to Campaign action.
- **ReportResultsAddedToEinsteinDiscovery:** Report executed synchronously from Einstein Discovery.
- **Unknown:** Report execution origin is unknown.
- **Test:** Report execution resulted from a test.

RENDERING_TYPE**Type**

String

Description

Describes the format of the report output in Salesforce Classic. If the report was exported in Lightning Experience, this field is blank.

Possible Values

- **W:** Web (HTML)
- **E:** Email
- **P:** Printable
- **X:** Excel
- **C:** Comma-separated values (CSV)
- **J:** JavaScript Object Notation (JSON)
- **D:** Dummy data

REPORT_ID**Type**

Id

Description

The 15-character ID of the report that was run.

REPORT_ID_DERIVED**Type**

Id

Description

The 18-character case insensitive ID of the report that was run.

REQUEST_ID**Type**

String

Description

The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same **REQUEST_ID**.

For example: 3nWgxWbDKWWDIk0FKfF5DV.

REQUEST_STATUS

Type

String

Description

The status of the request for a page view or user interface action.

For example:

- S—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned.
- F—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only.
- U—Undefined
- A—Authorization Error
- R—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page.
- N—Not Found. 404 error.

This field can have a blank value.

ROW_COUNT

Type

Number

Description

The number of rows that were processed in the Asynchronous Report Run event. High row counts, coupled with a high AVERAGE_ROW_SIZE, can indicate that a user is downloading information for fraudulent purposes. For example, a salesperson who downloads all sales leads before departing for a competitor.

Example

150

RUN_TIME

Type

Number

Description

The amount of time that the request took in milliseconds.

SESSION_KEY

Type

String

Description

The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.

For example: d7DEq/ANa7nNZZVD.

SORT

Type

String

Description

The sort column and order that was used in the report.

TIMESTAMP

Type

String

Description

The access time of Salesforce services in GMT.

For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type

DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

URI

Type

String

Description

The URI of the page that's receiving the request.

For example: /home/home.jsp.

URI_ID_DERIVED

Type

ID

Description

The 18-character case insensitive ID of the URI of the page that's receiving the request.

USER_ID

Type

Id

Description

The 15-character ID of the user who's using Salesforce services through the UI or the API.

For example: 00530000009M943

USER_ID_DERIVED

Type

Id

Description

The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API.

For example: 005900000000I1SNIA0.

USER_TYPE

Type

String

Description

The category of user license.

Possible values are:

- **CsnOnly**—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users.
 - **CspLitePortal**—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site.
 - **CustomerSuccess**—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal.
 - **Guest**—Users whose access is limited so that your customers can view and interact with your site without logging in.
 - **PowerCustomerSuccess**—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy.
 - **PowerPartner**—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site.
 - **SelfService**—Users whose access is limited because they're organization customers and access the application through a self-service portal.
 - **Standard**—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.
-

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Aura Request Event Type

Aura Request events contain details of requests to Apex methods from Aura and Lightning web components. For example, you can benchmark request time or identify the URI of an unsuccessful request.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
ACTION_MESSAGE	Type String Description The action (Apex method) names and times for all the actions in the request in the format: <pre>action1Name=action1Time;action2Name=action2Time...</pre>
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
CPU_TIME	Type Number Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DB_TOTAL_TIME	Type Number Description The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and DB_CPU_TIME. Compare this field to CPU_TIME to determine whether performance issues are occurring in the database layer or in your own code.
EASY_SUITE_VALUE	Type String

Description

The org's Small Business Suite Edition, if applicable. This field populates only for Small Business Suite editions and Salesforce Foundations. Otherwise, it will be empty. Available in API version 66.0 and later.

For example:

- `Freemium`—Salesforce Free Suite
- `Starter`—Salesforce Starter Suite
- `Pro`—Salesforce Pro Suite
- `C360SuiteEE`—Salesforce Foundations

EVENT_TYPE

Type

String

Description

The type of event. The value is always `AuraRequest`.

LOGIN_KEY

Type

String

Description

The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.

For example: `GeJCSym5eyvtEK2I`.

ORGANIZATION_ID

Type

Id

Description

The 15-character ID of the organization.

For example: `00D000000000123`.

Example

REQUEST_ID

Type

String

Description

The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same `REQUEST_ID`.

For example: `3nWgxWbDKWWDIk0FKfF5DV`.

REQUEST_METHOD

Type

String

Description

The HTTP method of the request, such as `GET` or `POST`.

`REQUEST_STATUS`**Type**

String

Description

The status of the request for a page view or user interface action.

For example:

- **S**—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned.
- **F**—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only.
- **U**—Undefined
- **A**—Authorization Error
- **R**—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page.
- **N**—Not Found. 404 error.

This field can have a blank value.

`RUN_TIME`**Type**

Number

Description

The amount of time that the request took in milliseconds.

`SESSION_KEY`**Type**

String

Description

The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.

For example: d7DEq/ANa7nNZZVD.

`TIMESTAMP`**Type**

String

Description

The access time of Salesforce services in GMT.

For example: 20130715233322.670.

`TIMESTAMP_DERIVED`**Type**

DateTime

	Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
URI	Type String Description The URI of the resource that's receiving the request. For example: /aura.
URI_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the URI of the page that's receiving the request.
USER_AGENT	Type String Description The numeric code for the type of client used to make the request (for example, the browser, application, or API).
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API. For example: 00590000000I1SNIA0.
USER_TYPE	Type String Description The category of user license. Possible values are:

- `CsnOnly`—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users.
 - `CspLitePortal`—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site.
 - `CustomerSuccess`—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal.
 - `Guest`—Users whose access is limited so that your customers can view and interact with your site without logging in.
 - `PowerCustomerSuccess`—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy.
 - `PowerPartner`—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site.
 - `SelfService`—Users whose access is limited because they're organization customers and access the application through a self-service portal.
 - `Standard`—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.
-

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Blocked Redirect Event Type

Blocked redirect events capture information about blocked redirections from Salesforce to untrusted and malformed URLs. The Blocked Redirect event type is available in the EventLogFile object in API version 63.0 and later.

This event is free for all customers with a 24-hour data retention period. The blocked redirects event is available in the API but not in the Event Monitoring Analytics app.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or the [REST API Developer's Guide](#).

Blocked redirect events capture these redirections when the target URL isn't a [RedirectWhitelistUrl](#) or when the target URL fails a syntax check.

- An anchor link within a page or component that includes a redirection. For example, `<a href="/?startURL=targetUrl">linkText</a>` includes a redirection via the startURL parameter.
- A parameter within a page that redirects the user. For example, this form action redirects the user through the saveURL parameter: `<form action="/xyz?saveURL=targetURL">`.

Within pages and components, a direct anchor link to an external URL is always allowed, even if the target URL isn't a [RedirectWhitelistUrl](#). For those direct anchor links, if the target URL fails a syntax check, the user receives an error but the redirection isn't captured as a blocked redirect event. An example of a direct anchor link is `<a href="targetUrl">linkText</a>`.

For hyperlinks within URL and Long Text Area fields, blocked redirections to untrusted URLs are captured as blocked redirect events only when the user who clicked the hyperlink accessed Salesforce via Salesforce Classic. If those users see a warning message and can proceed to the untrusted URL, that event isn't captured as a blocked redirect event.

 **Note:** To help preserve performance, Salesforce uses throttling, a technique that limits the number of generated blocked redirect events when the volume is exceptionally high. Therefore, if your org generates a high volume of blocked redirections over a short period of time, some of those redirections can fail to generate a blocked redirect event.

Fields

Field	Details
BLOCKED_URI	Type String Description The full string of the target for the redirection. Example <code>https://www.example.com/shop.htm</code>
BLOCKED_URI_DOMAIN	Type String Description If BLOCKED_URI is a URL, the domain for that URL. To allow future redirections to the BLOCKED_URI, BLOCKED_URI_DOMAIN is the value to add to RedirectWhitelistUrl. Example <code>www.example.com</code>
EVENT_TYPE	Type String Description The type of event. The value is always <code>BlockedRedirect</code>.
MALFORMED_URL	Type Boolean Description Indicates whether this redirection was blocked because the target URL failed a syntax check (1) or not (0). Here are examples of malformed URLs.

Field	Details
	- https://www.example.com/\$t61'3 - https://malformed^url.example.com
ORIGIN	Type String Description The origin that caused the request to the <code>BLOCKED_URI</code>. For example, if a form on an Experience Cloud Visualforce site page redirects a user to an untrusted URL via the <code>saveURL</code> parameter, <code>ORIGIN</code> contains the base URL of that site.
REFERRER	Type String Description The absolute or partial address from which the request to the <code>BLOCKED_URI</code> came. The <code>Referrer-Policy</code> HTTP Header of the request determines how much of the URL is shared.
REMOTE_ADDRESS	Type String Description Remote IP address of the client making the request.
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code>. Example 0000000062_0000x8Lz-
TIMESTAMP	Type DateTime Description The access time of Salesforce services in GMT. Example 20220715233322.670
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). The time zone is always GMT.

Field	Details
	Example 2022-07-27T11:32:59.555Z.

Usage

Only one blocked redirect log file is available at a time. When the daily incremental event log file is generated during the daily background process, the new file replaces the existing file.

If the log file doesn't exist, either the log generation process hasn't run yet or there's no redirection data to report for that 24-hour window. The log file is generated only when at least one redirection occurred for the day.

To collect blocked redirect logs for multiple days, schedule a daily query of the Blocked Redirect event type via REST API. For example, you can configure a cron job in Unix or a scheduled task in Windows to run the query.

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Bulk API Event Type

Bulk API events contain details about Bulk API requests.



Note: This event type does not include Bulk API 2.0 requests. For information about the BulkApi2 event type, see [Bulk API 2.0 Event Type](#) on page 2161.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
BATCH_ID	Type String Description The 15-character ID of the Bulk API batch.
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.

CPU_TIME

Type

Number

Description

The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.

ENTITY_TYPE

Type

String

Description

The type of entity that the Bulk API used.

EVENT_TYPE

Type

String

Description

The type of event. The value is always `BulkApi`.

JOB_ID

Type

String

Description

The 15-character ID of the Bulk API job.

LOGIN_KEY

Type

String

Description

The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.

For example: `GeJCsym5eyvtEK2I`.

MESSAGE

Type

EscapedString

Description

Any success or error message that's associated with the request.

NUMBER_FAILURES

Type

Number

Description

The number of failures that were returned with the request.

OPERATION_TYPE

Type

String

	Description The type of Bulk API operation that was performed.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: 00D000000000123.
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. For example: 3nWgxWbDKWWDIk0FKfF5DV.
ROWS_PROCESSED	Type Number Description The number of rows that were processed in the request. For example: 150.
RUN_TIME	Type Number Description The amount of time that the request took in milliseconds.
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
SUCCESS	Type Boolean Description Whether the batch was successful.
TIMESTAMP	Type String

	Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
URI	Type String Description The URI of the page that's receiving the request. For example: /home/home.jsp.
URI_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the URI of the page that's receiving the request.
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API. For example: 00590000000I1SNIA0.

SEE ALSO:

[EventLogFile Supported Event Types](#)
[EventLogFile](#)

Bulk API Request Event Type

The Bulk API request event captures when Bulk API requests are received to create a job, update a job, create a batch, update a batch, and when a job completes.



Note: This event type doesn't include Bulk API 2.0 requests. For information about the BulkApi2 event types, see [Bulk API 2.0 Event Type](#) on page 2161.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
API_VERSION	Type Number Description The API version.
BATCH_ID	Type String Description The 15-character ID of the Bulk API batch.
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.
CLIENT_NAME	Type EscapedString Description The name of the client making the request.
CONCURRENCY_MODE	Type String Description The concurrency mode selected by the user.
CONNECTED_APP_ID	Type String Description The ID of the connected app making a request.

CPU_TIME

Type

Number

Description

The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.

ERROR_MESSAGE

Type

EscapedString

Description

The type of entity that the Bulk API used.

EVENT_TYPE

Type

String

Description

The type of event. The value is always BulkApiRequest.

JOB_ID

Type

String

Description

The 15-character ID of the Bulk API job.

LOGIN_KEY

Type

String

Description

The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.

For example: GeJCsym5eyvtEK2I.

OPERATION_TYPE

Type

String

Description

The type of Bulk API operation.

ORGANIZATION_ID

Type

Id

Description

The 15-character ID of the organization.

For example: 00D000000000123.

REQUEST_ID

Type

String

	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. For example: 3nWgxWbDKWWDIk0FKfF5DV.
REQUEST_PATH	Type String Description The path of the request.
RUN_TIME	Type Number Description The amount of time that the request took in milliseconds.
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
STATUS_CODE	Type Number Description The HTTP Status code indicating whether the batch was successful.
SUCCESS	Type Boolean Description Whether the batch was successful.
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime

	Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. The timezone is GMT.
URI	Type String Description The URI of the page that's receiving the request. For example: /home/home.jsp.
URI_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the URI of the page that's receiving the request.
USER_ID	Type Id Description The ID of the user making the request.
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API. For example: 00590000000011SNIA0.

Bulk API 2.0 Event Type

BulkApi2 events contain details about Bulk API 2.0 requests.



Note: This event type does not include Bulk API requests. For information about the BulkApi event type, see [Bulk API Event Type](#) on page 2154.

You can monitor the following Bulk API 2.0 parameters:

- The type of data processed via Bulk API 2.0 operations, and how much of that data was processed.
- Bulk API 2.0 limits.
- For jobs, track how long it takes to complete, database, and CPU usage.
- Understand users and the operations they performed.
- Detailed errors and failures.

BulkApi2 events represent the steps in the Bulk API 2.0 workflow and changes in job state.

For a Bulk API 2.0 **Ingest** job, an event is emitted when a job is marked:

- created
 - Note: For multi-part requests, there is no “created” event emitted, only an uploadComplete event.
- uploadComplete
- inProgress
- with a processing update
- complete
- aborted
- deleted

For a Bulk API 2.0 **Query** job, an event is emitted when a job is marked:

- created
- uploadComplete
- inProgress
- with a processing update
- complete
- aborted
- deleted

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as “Salesforce.com IP”. For example: 96.43.144.26.
CPU_TIME	Type Number Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
ENTITY_TYPE	Type String Description The type of entity that Bulk API 2.0 used.

For example, `Account` or `Contact`.

`EVENT_TYPE`

Type

String

Description

The type of event. The value is always `BulkApi2`.

`JOB_ID`

Type

String

Description

The 15-character ID of the Bulk API 2.0 job.

`JOB_STATUS`

Type

String

Description

The job's current status.

`LOGIN_KEY`

Type

String

Description

The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.

For example: `GeJCsym5eyvtEK2I`.

`OPERATION_TYPE`

Type

String

Description

The type of Bulk API 2.0 operation that was performed.

`ORGANIZATION_ID`

Type

Id

Description

The 15-character ID of the organization.

For example: `00D000000000123`.

`RECORDS_FAILED`

Type

Number

Description

The total number of records that failed.

For example: `150`.

`RECORDS_PROCESSED`

Type

Number

Description

Number of records processed for this event.

For example: 980.



Note: The number of records processed is reported differently for ingest and query jobs.

For *ingest* jobs:

- Events with a status of `InProgress` report (if applicable) the number of records processed.

For *query* jobs:

- Events with a status of `JobComplete` or `InProgress` report (if applicable) the number of records processed.

RESULT_SIZE_MB

Type

Number

Description

Number of megabytes returned in query. Empty for ingest jobs.

For example: 670.



Note: RESULT_SIZE_MB currently does not emit events, but is shown here as a placeholder for future enhancement.

REQUEST_ID

Type

String

Description

The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.

For example: 3nWgxWbDKWWDIk0FKfF5DV.

RUN_TIME

Type

Number

Description

The amount of time that the request took in milliseconds.

SESSION_KEY

Type

String

Description

The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.

For example: d7DEq/ANa7nNZZVD.

TIMESTAMP

Type

String

	Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
URI	Type String Description The URI of the page that's receiving the request. For example: /home/home.jsp.
URI_ID_DERIVED	Type ID Description The 18-character case-safe ID of the URI of the page that's receiving the request.
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case-safe ID of the user who's using Salesforce services through the UI or the API. For example: 00590000000I1SNIA0.

Change Set Operation Event Type

Change Set Operation events contain information from change set migrations.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
CHANGE_SET_NAME	Type String Description The name of the change set.
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
CPU_TIME	Type Number Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
EVENT_TYPE	Type String Description The type of event. The value is always <code>ChangeSetOperation</code>.
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: <code>GeJCsym5eyvtEK2I</code>.
OPERATION	Type String Description The operation that's being performed. Possible Values • DELETE

- DEPLOY
- UPLOAD
- VALIDATE

ORGANIZATION_ID

Type

Id

Description

The 15-character ID of the organization.

For example: 00D000000000123.

REQUEST_ID

Type

String

Description

The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.

For example: 3nWgxWbDKWWDIk0FKfF5DV.

RUN_TIME

Type

Number

Description

The amount of time that the request took in milliseconds.

SESSION_KEY

Type

String

Description

The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.

For example: d7DEq/ANa7nNZZVD.

TARGET_ORG_ID

Type

Id

Description

The 15-character ID of the organization that's receiving the change set.

TIMESTAMP

Type

String

Description

The access time of Salesforce services in GMT.

For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type

DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

URI

Type

String

Description

The URI of the page that's receiving the request.

For example: /home/home.jsp.

URI_ID_DERIVED

Type

ID

Description

The 18-character case insensitive ID of the URI of the page that's receiving the request.

USER_ID

Type

Id

Description

The 15-character ID of the user who's using Salesforce services through the UI or the API.

For example: 00530000009M943

USER_ID_DERIVED

Type

Id

Description

The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API.

For example: 00590000000I1SNIA0.

SEE ALSO:

[EventLogFile Supported Event Types](#)[EventLogFile](#)

Composite API Event Type

Composite API events contain details about composite API requests. One composite API event is generated for each composite API and composite graph API call. This event type is available in API version 64.0 and later.

Fields

Field	Details
ALL_OR_NONE	Type boolean Description Indicates whether the entire request is rolled back when the update of any object fails (true), or if the call should continue with the independent update of other objects in the request (false). The default is false. If true, it overrides the ALL_OR_NONE setting in subrequests.
CLIENT_IP	Type String Description The IP address of the client that's using the API.
CPU_TIME	Type Number Description The CPU time in milliseconds to complete the request.
EVENT_TYPE	Type String Description The type of the event. The value is always CompositeApi.
FAILURE_REASON	Type String Description An error code giving the reason for a failed request.
IS_REQUEST_COLLATION_ON	Type boolean Description The setting for subrequest collation.
LOGIN_KEY	Type String Description Identifies all related events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I
NUM_GRAPH_DEPTH	Type Number

Field	Details
	Description The depth of the graph. When multiple graphs are present, this number is the depth of the deepest graph.
NUM_RETRIES	Type Number Description Number of attempted retries while processing the graph.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization that made the request. For example: 00D000000000123
REQUEST_ID	Type String Description A unique ID identifying the composite API request.
RUN_TIME	Type Number Description The amount of time in milliseconds to complete the request.
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. For example: 20130715233322.670
TIMESTAMP	Type String Description The date and time that the event was generated.
TIMESTAMP_DERIVED	Type DateTime Description The date and time, in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ), that the event was generated. The timezone is GMT. For example: 2015-07-27T11:32:59.555Z

Field	Details
URI	Type String Description The resource URI.
URI_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the URI of the page that's receiving the request.
USER_ID	Type Id Description The 15-character ID of the user that's using the API. For example: 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user that's using the API. For example: 00590000000I1SNIA0

SEE ALSO:[REST API Developer Guide: Composite](#)[REST API Developer Guide: Composite Graph](#)[REST API Developer Guide: Using Composite Resources](#)

Composite API Subrequest Event Type

Composite API subrequest events contain details about composite API subrequests. One composite API subrequest event is generated for each subrequest or collated set of subrequests. For example, if a composite API request contains five subrequests and four of the subrequests are collated, then two composite API subrequest events are generated. This example also applies to composite graph API. This event type is available in API version 64.0 and later.

Fields

Field	Details
CANCELLED_REASON	Type String Description If the subrequest was canceled, shows the reason.

Field	Details
CLIENT_IP	Type String Description The IP address of the client that's using the API.
CPU_TIME	Type Number Description The CPU time in milliseconds to complete the request.
DB_TOTAL_TIME	Type Number Description Time (in nanoseconds) spent waiting for database processing in aggregate for all operations in the subrequest or set of collated subrequests. Compare this field to CPU_TIME to determine whether performance issues are occurring in the database layer or in your own code.
EVENT_TYPE	Type String Description The type of the event. The value is always CompositeApiSubrequest.
INITIAL_REFERENCE_IDS	Type String Description The original reference IDs of subrequests that were collated into the current subrequest.
IS_CANCELLED	Type boolean Description True if the subrequest call was canceled.
LOGIN_KEY	Type String Description Identifies all related events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I
METHOD	Type String

Field	Details
	Description The HTTP method of the request.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization that made the request. For example: 00D0000000000123
REQUEST_ID	Type String Description A unique ID identifying the composite API request.
REQUEST_STATUS	Type String Description The status of the subrequest or collated set of subrequests. For example: • S—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned. • F—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only. • U—Undefined • A—Authorization Error • R—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page. • N—Not Found. 404 error. This field can have a blank value.
RUN_TIME	Type Number Description The amount of time in milliseconds to complete the request.
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. For example: 20130715233322.670
STATUS_CODE	Type Number

Field	Details
	Description The HTTP status code for the response.
SUCCESS	Type boolean Description True if the subrequest call succeeded.
TIMESTAMP	Type String Description The date and time that the event was generated.
TIMESTAMP_DERIVED	Type DateTime Description The date and time, in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ), that the event was generated. The timezone is GMT. For example: 2015-07-27T11:32:59.555Z
URI	Type String Description The resource URI.
URI_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the URI of the page that's receiving the request.
USER_ID	Type Id Description The 15-character ID of the user that's using the API. For example: 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user that's using the API. For example: 00590000000I1SNIA0

Field	Details
USER_TYPE	Type String Description The category of user license. Possible values are: • CsnOnly—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users. • CspLitePortal—CSP Lite Portal license. Users whose access is limited because they're organization customers and they access the application through a customer portal or an Experience Cloud site. • CustomerSuccess—Customer Success license. Users whose access is limited because they're organization customers and they access the application through a customer portal. • Guest—Users whose access is limited so that your customers can view and interact with your site without logging in. • PowerCustomerSuccess—Power Customer Success license. Users whose access is limited because they're organization customers and they access the application through a customer portal. Users with this license type can view and edit data that they directly own or data owned by or shared with users below them in the customer portal role hierarchy. • PowerPartner—Power Partner license. Users whose access is limited because they're partners and they typically access the application through a partner portal or site. • SelfService—Users whose access is limited because they're organization customers and they access the application through a self-service portal. • Standard—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses and admins for this org.

SEE ALSO:

[REST API Developer Guide: Composite](#)

[REST API Developer Guide: Composite Graph](#)

[REST API Developer Guide: Using Composite Resources](#)

Concurrent Long-Running Apex Limit Event Type

Concurrent Long-Running Apex Limit events contain information about long-running concurrent Apex requests in your org that Salesforce terminated after reaching your org's concurrency limit. Requests with an established Apex context that execute for 5 seconds are counted towards your org's limit of concurrent long-running requests. (Asynchronous requests don't count towards the limit.) When the long-running requests exceed the org default limit, all new Apex invocation requests are denied. This event type is available in the EventLogFile object in API version 45.0 and later.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
EVENT_TYPE	Type String Description The type of event. The value is always <code>ConcurrentLongRunningApexLimit</code>.
NUMBER_REQUESTS	Type Number Description Count of requests with an established Apex context executing for longer than 5 seconds in your org.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: 00D0000000000123.
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code>. For example: 3nWgxWbDKWWDIk0FKfF5DV.
REQUEST_URI	Type String Description URI of the long-running Apex request that Salesforce terminated. Example /apex/ApexClassName
REQUESTS_LIMIT	Type Number Description Maximum count of requests with an established Apex context that can execute for longer than 5 seconds. When <code>NUMBER_REQUESTS</code> reaches this limit, then additional long-running Apex requests are terminated. (Asynchronous requests don't count towards the limit.) See <i>Apex Developer Guide</i>: Lightning Platform Apex Limits. Example 10

Field	Details
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943

Usage

For example, you can monitor Concurrent Long-Running Apex Limit log counts to get a benchmark or plot a count by hour. To identify where the limit was exceeded, see the REQUEST_URI field. Then, cross-reference this data with [Apex Execution event](#) data where the average RUN_TIME exceeds 5 seconds. To identify synchronous requests only, cross-reference event data with the QUIDDITY field in Apex Execution event data. For example, QUIDDITY NOT IN (A,BA,F,Q,S) and CALLOUT_TIME (>5000).

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

[Salesforce Developers Blog: Designing Force.com Applications That Avoid Hitting Concurrent Request Limits](#)

Console Event Type

Console events contain information about the performance and use of Salesforce Consoles. The Console events are logged whenever a Console tab is opened with a sidebar component. Outside of that, when Console tabs are opened, a regular view record detail event is served just like in Salesforce Classic.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
-------	---------

CLIENT_IP

Type

String

Description

The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP".

For example: 96.43.144.26.

COMPONENT_ID

Type

Id

Description

The 15-character ID of the component.

COMPONENT_ID_DERIVED

Type

Id

Description

The 18-character, case-insensitive ID of the component.

CONSOLE_ID

Type

Id

Description

The 15-character ID of the console.

CONSOLE_ID_DERIVED

Type

Id

Description

The 18-character, case-insensitive ID of the console.

CPU_TIME

Type

Number

Description

The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.

DB_TOTAL_TIME

Type

Number

Description

The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and DB_CPU_TIME. Compare this field to CPU_TIME to determine whether performance issues are occurring in the database layer or in your own code.

EVENT_TYPE

Type

String

Description

The type of event. The value is always `Console`.

LICENSE_CONTEXT

Type

String

Description

The license context in which a user is using a console.

Example

service, salesandservice, sales

LOGIN_KEY

Type

String

Description

The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.

For example: `GeJCsym5eyvtEK2I`.

ORGANIZATION_ID

Type

Id

Description

The 15-character ID of the organization.

For example: `00D000000000123`.

RECORD_ID

Type

Id

Description

The 15-character ID of the record that's associated with the console.

RECORD_ID_DERIVED

Type

Id

Description

The 18-character, case-insensitive ID of the record that's associated with the console.

REQUEST_ID

Type

String

	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code> . For example: 3nWgxWbDKWWDIk0FKfF5DV.
<code>REQUEST_STATUS</code>	Type String Description The status of the request for a page view or user interface action. For example: • S—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned. • F—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only. • U—Undefined • A—Authorization Error • R—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page. • N—Not Found. 404 error. This field can have a blank value.
<code>RUN_TIME</code>	Type Number Description The amount of time that the request took in milliseconds.
<code>SESSION_KEY</code>	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
<code>TIMESTAMP</code>	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type

DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

URI

Type

String

Description

The URI of the page that's receiving the request.

For example: /home/home.jsp.

URI_ID_DERIVED

Type

ID

Description

The 18-character case insensitive ID of the URI of the page that's receiving the request.

USER_ID

Type

Id

Description

The 15-character ID of the user who's using Salesforce services through the UI or the API.

For example: 00530000009M943

USER_ID_DERIVED

Type

Id

Description

The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API.

For example: 00590000000I1SNIA0.

USER_TYPE

Type

String

Description

The category of user license.

Possible values are:

- **CanOnly**—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users.

- `CspLitePortal`—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site.
- `CustomerSuccess`—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal.
- `Guest`—Users whose access is limited so that your customers can view and interact with your site without logging in.
- `PowerCustomerSuccess`—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy.
- `PowerPartner`—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site.
- `SelfService`—Users whose access is limited because they're organization customers and access the application through a self-service portal.
- `Standard`—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

SEE ALSO:[EventLogFile Supported Event Types](#)[EventLogFile](#)

Content Distribution Event Type

Content Distribution events contain information about content distributions and deliveries to users.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
<code>ACTION</code>	Type String

	Description The action that's used when a delivery is viewed.
	Possible Values • VIEW • INSERT • UPDATE
DELIVERY_ID	Type Id Description The 15-character ID of the content delivery.
DELIVERY_LOCATION	Type String Description The location of the delivery.
EVENT_TYPE	Type String Description The type of event. The value is always ContentDistribution.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: 00D000000000123.
RELATED_ENTITY_ID	Type Id Description The 15-character ID of the record that's associated with the delivery distribution.
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. For example: 3nWgxWbDKWWDIk0FKfF5DV.

TIMESTAMP

Type

String

Description

The access time of Salesforce services in GMT.

For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type

DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

USER_ID

Type

Id

Description

The 15-character ID of the user who's using Salesforce services through the UI or the API.

For example: 00530000009M943

USER_ID_DERIVED

Type

Id

Description

The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API.

For example: 00590000000I1SNIA0.

VERSION_ID

Type

Id

Description

The 15-character ID of the content version.

SEE ALSO:

[EventLogFile Supported Event Types](#)[EventLogFile](#)

Content Document Link Event Type

Content Document Link events contain sharing information for content documents.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
DOCUMENT_ID	Type Id Description The 15-character ID of the document that's being shared.
EVENT_TYPE	Type String Description The type of event. The value is always <code>ContentDocumentLink</code>.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: 00D000000000123.
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code>. For example: 3nWgxWbDKWWDIk0FKfF5DV.
SHARED_WITH_ENTITY_ID	Type Id Description Who the document was shared with.
SHARING_OPERATION	Type String Description The type of sharing operation on the document. Possible Values • INSERT • UPDATE • DELETE

SHARING_PERMISSION

Type

String

Description

What permissions the document was shared with.

Possible Values

- v: Viewer
- c: Collaborator
- I: Inferred—that is, the sharing permissions were inferred from a relationship between the viewer and document. For example, a document's owner has a sharing permission to the document itself. Or, a document can be a part of a content collection, and the viewer has sharing permissions to the collection rather than explicit permissions to the document directly.

TIMESTAMP

Type

String

Description

The access time of Salesforce services in GMT.

For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type

DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

USER_ID

Type

Id

Description

The 15-character ID of the user who's using Salesforce services through the UI or the API.

For example: 00530000009M943

USER_ID_DERIVED

Type

Id

Description

The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API.

For example: 005900000000I1SNIA0.

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Content Transfer Event Type

Content Transfer events contain information about content transfer events, such as downloads, uploads, and previews. This information includes events performed on files and attachments to records.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
DOCUMENT_ID	Type Id Description The 15-character ID of the document that's being shared.
DOCUMENT_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the document that's being shared.
EVENT_TYPE	Type String Description The type of event. The value is always ContentTransfer.
FILE_PREVIEW_TYPE	Type String Description The content type of the file preview.
FILE_TYPE	Type String Description The content type of the file version.

ORGANIZATION_ID

Type
Id**Description**

The 15-character ID of the organization.

For example: 00D000000000123.

REQUEST_ID

Type
String**Description**

The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.

For example: 3nWgxWbDKWWDIk0FKfF5DV.

SIZE_BYTES

Type
Number**Description**

The size of the file transfer, in bytes.

TIMESTAMP

Type
String**Description**

The access time of Salesforce services in GMT.

For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type
DateTime**Description**

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

TRANSACTION_TYPE

Type
String**Description**

The operation that was performed, including operations on files and attachments to records. For example, you can track operations in the Attachments related list on a case.

Possible Values

- VersionDownloadAction and VersionDownloadApi represent downloads via the user interface and API respectively.

- `VersionRenditionDownload` represents a file preview action.
- `saveVersion` represents a file that's being uploaded.

`USER_ID`**Type**

Id

Description

The 15-character ID of the user who's using Salesforce services through the UI or the API.

For example: 00530000009M943

`USER_ID_DERIVED`**Type**

Id

Description

The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API.

For example: 00590000000I1SNIA0.

`VERSION_ID`**Type**

Id

Description

The 15-character ID of the content version.

`VERSION_ID_DERIVED`**Type**

Id

Description

The 18-character case insensitive ID of the content version.

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Continuation Callout Summary Event Type

Continuation Callout Summary events contain information about all of the asynchronous callouts performed during a transaction, their response status codes, execution times, and URL endpoint destinations. This event type is available in the EventLogFile object in API version 43.0 and later.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or the [REST API Developer's Guide](#).

Fields

Field	Details
CONTINUATION_ID	Type String Description A unique ID identifying a sequence of events within a request. Example SFDC-Continuation-14e3cg85-961d-389e-7bz1-3d171543162a
DURATION	Type Number Description Total duration of continuation, in milliseconds.
EVENT_TYPE	Type String Description The type of event. The value is always <code>ContinuationCalloutSummary</code>.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: 00D000000000123.
ORIGIN_REQUEST_ID	Type Id Description The ID of the request that initiated a callout. Example TID:5iLoVKlztX_rDDJcp7
REQUEST_FORM_SIZE	Type String Description Continuation request form size, in bytes. Depending on how many HTTP requests were used in a continuation, this field can contain up to three space-separated values.
REQUEST_ID	Type String

Field	Details
	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code>. For example: <code>3nWgxWbDKWWDIk0FKfF5DV</code>.
<code>RESPONSE_SIZE</code>	Type String Description The size of the callout response, in bytes. Depending on how many HTTP requests were used in a continuation, this field can contain up to three space-separated values.
<code>STATUS_CODE</code>	Type String Description The HTTP status or internal code returned by the remote endpoint. A status code of 200 indicates that the request was successful. Other status code values indicate the type of problem that was encountered. Depending on how many HTTP requests were used in a continuation, this field can contain up to three space-separated values. Examples • 2000—The timeout was reached, and the server didn't get a chance to respond. • 2001—There was a connection failure. • 2002—Exceptions occurred. • 2003—The response hasn't arrived (which also means that the Apex asynchronous callout framework hasn't resumed). • 2004—The response size is too large (greater than 1 MB).
<code>SUCCESS</code>	Type Boolean Description Indicates whether the continuation was successful (1) or not (0).
<code>TIMESTAMP</code>	Type String Description The access time of Salesforce services in GMT. For example: <code>20130715233322.670</code>.
<code>TIMESTAMP_DERIVED</code>	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

Field	Details
	For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
URL	Type String Description The callout endpoint URL. Depending on how many HTTP requests were used in a continuation, this field can contain up to three space-separated values. Example http://prod.location.amazonaws.com:1000/orders/order/_search
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 005300000009M943
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API. For example: 005900000000I1SNIA0.
VF_CONTROLLER_SIZE	Type String Description Continuation Visualforce controller size, in bytes. Depending on how many HTTP requests were used in a continuation, this field can contain up to three space-separated values.

SEE ALSO:

[EventLogFile Supported Event Types](#)[EventLogFile](#)

CORS Violation Record Event Type

CORS Violation Record events capture information about Cross-Origin Resource Sharing (CORS) violations. Cross-origin requests to Lightning apps are blocked unless the request comes from a URL listed in your CORS allowlist.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
EVENT_TYPE	Type String Description The type of event. The value is always <code>CorsViolation</code>.
HOST	Type String Description The URL of the requested Salesforce resource. If JavaScript code at <code>https://www.example.com</code> requests a resource from <code>https://www.salesforce.com</code>, the origin is <code>https://www.example.com</code> and the host is <code>https://www.salesforce.com</code>.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: <code>00D0000000000123</code>.
ORIGIN	Type String Description The URL of the site making the cross-origin request to Salesforce. If JavaScript code at <code>https://www.example.com</code> requests a resource from <code>https://www.salesforce.com</code>, the origin is <code>https://www.example.com</code> and the host is <code>https://www.salesforce.com</code>.
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code>. For example: <code>3nWgxWbDKWWDIk0FKfF5DV</code>.

TIMESTAMP

Type

String

Description

The access time of Salesforce services in GMT.

For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type

DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

CSP Violation Event Type

CSP violation events capture details about blocked resource requests from Lightning Experience pages based on your content security policy (CSP). The CSP Violation event type is available in the EventLogFile object in API version 63.0 and later.

This event is free for all customers with a 24-hour data retention period. The CSP violation event is available in the API but not in the Event Monitoring Analytics app.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or the [REST API Developer's Guide](#).



Note: To help preserve performance, Salesforce uses throttling, a technique that limits the number of generated CSP violation events when the volume is exceptionally high. Therefore, if your org generates a high volume of CSP violations over a short period of time, some of those violations can fail to generate a CSP violation event.

Fields

Field**Details**

BLOCKED_URI

Type

String

Description

The full string of the blocked resource. If the call to the blocked resource used a URL, `BLOCKED_URI` is the full URL. Or, for violations with a `DIRECTIVE` of `script-src` directives, `inline` or `eval`.

Examples

- `https://www.example.com/images/picture.png`
- `file://host1:0002/media/video.mp4`
- `inline`

BLOCKED_URI_DOMAIN

Type

String

Field	Details
	Description If <code>BLOCKED_URI</code> is a URL, the domain for that URL. To allow resources to be loaded from the <code>BLOCKED_URI</code>, <code>BLOCKED_URI_DOMAIN</code> is the <code>endpointUrl</code> value to add or update in the CspTrustedSite Metadata API. Example <code>www.example.com</code>
<code>COLUMN_NUMBER</code>	Type Number Description The column number in the document or worker script at which the violation occurred. This value is relevant only when <code>DIRECTIVE</code> is <code>script-src</code>. For those violations, use this value with <code>LINE_NUMBER</code> to identify the location of the violation. Example <code>27</code>
<code>CONTEXT</code>	Type String Description The content security policy (CSP) context for the request. The CSP context controls which pages can load content from a CspTrustedSite. CSP violation events capture details about blocked resource requests from only Lightning Experience pages, this value is always <code>Lightning</code>.
<code>DIRECTIVE</code>	Type String Description The CSP directive that blocked the resource request. Possible Values • <code>font-src</code> • <code>frame-src</code> • <code>img-src</code> • <code>media-src</code> • <code>style-src</code> • <code>script-src</code> For information on these directives and a full list of all CSP directives, see MDN Web Docs: Content-Security-Policy.
<code>DISPOSITION</code>	Type String

Field	Details
	Description The CSP violation handling instruction for the user agent at the time of the violation. Possible Values • <code>enforce</code>—Enforce the policy violation. For violations with this <code>DISPOSITION</code>, the resource request was blocked. • <code>report</code>—Report the policy violation. For violations with this <code>DISPOSITION</code>, the resource request wasn't blocked, but the violation was reported.
EVENT_TYPE	Type String Description The type of event. The value is always <code>CspViolation</code>.
LINE_NUMBER	Type Number Description The line number in the document or worker script at which the violation occurred. This value is relevant only when <code>DIRECTIVE</code> is <code>script-src</code>. For those violations, use this value with <code>COLUMN_NUMBER</code> to identify the location of the violation. Example 12
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code>. Example 0000000062_0000x8Lz-
RESOURCE_SAMPLE	Type String Description A sample of the resource that caused the violation, usually the first 40 characters, or the empty string. Example <pre>var lastRow = 4;greyLink('fRemoveRowLink var SFDCSessionVars={"server\":"https:\/\/\ LoginHint.getSavedIdentities(false);</pre>

Field	Details
	<pre>LoginHint.saveHintEdit();</pre> <pre>function handleLogin() {document.login.un...</pre>
SOURCE	Type String Description The page where this CSP violation originated. For example, if your CSP policy prevented an image from loading on a Visualforce page, SOURCE contains the URL of that page. Example <code>https://MyDomainName.my.salesforce.com/apex/HelloWorld</code>
SOURCE_FILE	Type String Description The URL of the script in which the violation occurred. If the violation didn't occur in a script, SOURCE_FILE is null. Example <code>https://www.example.com/script_xyz.js</code>
TIMESTAMP	Type DateTime Description The access time of Salesforce services in GMT. Example <code>20220715233322.670</code>
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). The time zone is always GMT. Example <code>2022-07-27T11:32:59.555Z.</code>

Usage

Only one CSP violation event log file is available at a time. When the daily incremental event log file is generated during the daily background process, the new file replaces the existing file.

If the event log file doesn't exist, either the log generation process hasn't run yet or there's no violation data to report for that 24-hour window. The event log file is generated only when at least one violation occurred for the day.

To collect CSP violation logs for multiple days, schedule a daily query of the CSP Violation event type via REST API. For example, you can configure a cron job in Unix or a scheduled task in Windows to run the query.

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Dashboard Event Type

Dashboard events contain details about report requests from dashboards. These requests are triggered by dashboard refreshes, subscriptions, and filter changes.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.
CPU_TIME	Type Number Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DASHBOARD_COMPONENT_ID	Type Id Description The 15-character ID of the dashboard component.
DASHBOARD_ID	Type String Description The 15-character ID of the dashboard that was run.
DASHBOARD_ID_DERIVED	Type String

	Description The 18-character case insensitive ID of the dashboard that was run.
DASHBOARD_TYPE	Type String Description The type of dashboard. Possible Values • R: Run as running user • C: Run as context user • S: Run as specific user
EVENT_TYPE	Type String Description The type of event. The value is always Dashboard.
IS_SCHEDULED	Type Boolean Description 1 if the dashboard component ran successfully, 0 if it didn't.
IS_SUCCESS	Type Boolean Description 1 if the dashboard component ran successfully, 0 if it didn't.
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: 00D000000000123.

REPORT_ID

Type

Id

Description

The 15-character ID of the report that was run.

REPORT_ID_DERIVED

Type

Id

Description

The 18-character case insensitive ID of the report that was run.

REQUEST_ID

Type

String

Description

The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.

For example: 3nWgxWbDKWWDIk0FKfF5DV.

RUN_TIME

Type

Number

Description

The amount of time that the request took in milliseconds.

SESSION_KEY

Type

String

Description

The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.

For example: d7DEq/ANa7nNZZVD.

TIMESTAMP

Type

String

Description

The access time of Salesforce services in GMT.

For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type

DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

URI

Type

String

Description

The URI of the page that's receiving the request.

For example: /home/home.jsp.

URI_ID_DERIVED

Type

ID

Description

The 18-character case insensitive ID of the URI of the page that's receiving the request.

USER_ID

Type

Id

Description

The 15-character ID of the user the dashboard is running as.

For example: 00530000009M943

USER_ID_DERIVED

Type

Id

Description

The 18-character case insensitive ID of the user the dashboard is running as.

For example: 00590000000I1SNIA0.

VIEWING_USER_ID

Type

Id

Description

The ID of the user who's viewing the dashboard.

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Database Save Event Type

Database Save events track when records are created, updated, or deleted. This object is available in API version 63.0 and later.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
DML_TYPE	Type String Description The type of DML statement.
EVENT_TYPE	Type Id Description The type of event.
FIRST_ENTITY_ID	Type String Description The first ID that is logged when an update occurs. If a single record is updated, the ID of that row is logged. If multiple records are updated, only one ID is logged.
KEY_PREFIX	Type String Description The key prefix of the entity type that was saved.
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session.
NUM_ROWS	Type String Description The number of entities that were saved.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization.
REQUEST_ID	Type String Description Globally unique id for a given request.

Field	Details
SAMPLE_FACTOR	Type Number Description The ratio of saved entities that were logged. A value of 1 means every entity saved was logged. A value of 100 means that 1 out of 100 entities saved was logged.
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. Example d7DEq/ANa7nNZZVD
TIMESTAMP	Type String Description The Timestamp at which the log event was generated.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). Example 2015-07-27T11:32:59.555Z
USER_ID	Type Id Description The ID of the user who's using Salesforce services through the UI or the API. Example 005XXXXXXXXXXXXX

Document Attachment Downloads Event Type

Document Attachment Downloads events contain details of document and attachment downloads.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
ENTITY_ID	Type Id Description The 15-character ID of the entity that's associated with the document or attachment.
EVENT_TYPE	Type String Description The type of event. The value is always DocumentAttachmentDownloads.
FILE_TYPE	Type String Description The type of the file or attachment.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: 00D0000000000123.
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. For example: 3nWgxWbDKWWDIk0FKfF5DV.
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime

	Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API. For example: 00590000000I1SNIA0.

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

External Cross-Org Callout Event Type

External Cross-Org Callout events represent external data callouts via the cross-org adapter for Salesforce Connect. This event type is available in the EventLogFile object in API version 40.0 and later.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer Guide](#).



Note: For the cross-org adapter for Salesforce Connect, event monitoring currently doesn't track search callouts.

Fields

Field	Details
ACTION	Type String Description Action performed by the callout. Possible Values query

Field	Details
	• upsert • delete
ENTITY	Type String Description Name of the external object being accessed. Example Order
EVENT_TYPE	Type String Description Type of event. Value is always <code>ExternalCrossOrgCallout</code>.
EXECUTE_MS	Type Number Description How long it took (in milliseconds) for Salesforce to prepare and execute the query. Available in API version 42.0 and later. Example 1
FETCH_MS	Type Number Description How long it took (in milliseconds) to retrieve the query results from the external system. Available in API version 42.0 and later. Example 452
FILTER	Type Text Description Field expressions to filter which rows to return. Corresponds to <code>WHERE</code> in SOQL queries. Example <code>WHERE CustomerId='123456'</code>
HAVING	Type Text Description Reserved for future use.

Field	Details
LIMIT	Type Number Description Maximum number of rows to return for a query. Corresponds to <code>LIMIT</code> in SOQL queries. Example 200
MESSAGE	Type String Description Error or warning message associated with the failed query callout. Value is always empty for upsert and delete callouts. Example System.UnexpectedException: Query is either selecting too many fields or the filter conditions are too complicated
OFFSET	Type Number Description Number of rows to skip when paging through a result set. Corresponds to <code>OFFSET</code> in SOQL queries. If a SOQL query doesn't define an <code>OFFSET</code>, the value is -1. Example 0 (default)
ORDERBY	Type String Description Field or column to use for sorting query results, and whether to sort the results in ascending (default) or descending order. Corresponds to <code>ORDER BY</code> in SOQL queries. Examples • <code>ORDER BY ShipName</code> • <code>ORDER BY ShipName DESC</code>
ORGANIZATION_ID	Type Id Description 15-character ID of the organization. Example 00D0000000000123

Field	Details
REQUEST_ID	Type String Description Unique ID of a transaction. A transaction can contain one or more events. All events in a transaction have the same REQUEST_ID. Example 4A13-HSKv3CKs-0FKfceaV
ROWS	Type Number Description Total number of records in the result set. Value is always 0 for upsert and delete callouts. Example 200
ROWS_FETCHED	Type Number Description Reserved for future use.
SELECT	Type String Description Comma-separated list of fields being queried. Corresponds to <code>SELECT</code> in SOQL queries. Example SELECT Id,Name,CustomerID,OrderDate
STATUS	Type Boolean Description Whether the query was successful. Value is always empty for upsert and delete callouts. Possible Values • 1—Success • 0—Failed
SUBQUERIES	Type Number Description The number of subqueries that the query is split into.

Field	Details
THROUGHPUT	Type Number Description Reserved for future use.
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
TOTAL_MS	Type Number Description How long it took (in milliseconds) to prepare and execute the query and to retrieve the query results. Example 453
USER_ID	Type Id Description 15-character ID of the user accessing the external system. Example 00530000009M943
USING_MRU	Type Boolean

Field	Details
	Description Reserved for future use.

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

External Custom Apex Callout Event Type

External Custom Apex Callout events represent external data callouts via custom adapters for Salesforce Connect. This event type is available in the EventLogFile object in API version 40.0 and later.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer Guide](#).

Fields

Field	Details
ACTION	Type String Description Action performed by the callout. Possible Values • query • upsert • delete
ENTITY	Type String Description Name of the external object being accessed. Example Order
EVENT_TYPE	Type String Description Type of event. Value is always ExternalCustomApexCallout.
EXECUTE_MS	Type Number

Field	Details
	Description How long it took (in milliseconds) for Salesforce to prepare and execute the query. Available in API version 42.0 and later. Example 102
FETCH_MS	Type Number Description How long it took (in milliseconds) to retrieve the query results from the external system. Available in API version 42.0 and later. Example 607
FILTER	Type Text Description Field expressions to filter which rows to return. Corresponds to <code>WHERE</code> in SOQL queries. Example Filter:[columnName=CustomerID, columnValue=537, subfilters=null, tableName=Order, type=EQUALS]
LIMIT	Type Number Description Maximum number of rows to return for a query. Corresponds to <code>LIMIT</code> in SOQL queries. Example 200
MESSAGE	Type String Description Error or warning message associated with the failed call. Example System.UnexpectedException: Query is either selecting too many fields or the filter conditions are too complicated
OFFSET	Type Number Description Number of rows to skip when paging through a result set. Corresponds to <code>OFFSET</code> in SOQL queries.

Field	Details
	Example 0 (default)
ORDERBY	Type String Description Field or column to use for sorting query results, and whether to sort the results in ascending (default) or descending order. Corresponds to <code>ORDER BY</code> in SQL queries. Examples (Order:[columnName=OrderDate, direction=ASCENDING, tableName=Order])
ORGANIZATION_ID	Type Id Description 15-character ID of the organization. Example 00D000000000123
REQUEST_ID	Type String Description Unique ID of a transaction. A transaction can contain one or more events. All events in a transaction have the same REQUEST_ID. Example 4A13-HSKv3CKs-0FKfceaV
ROWS	Type Number Description Total number of records in the result set. The value is always -1 if the custom adapter's <code>DataSource.Provider</code> class doesn't declare the <code>QUERY_TOTAL_SIZE</code> capability. Example 200
ROWS_FETCHED	Type Number Description Number of rows fetched by the callout. Available in API version 42.0 and later. Example 200

Field	Details
SELECT	Type String Description Comma-separated list of fields being queried. Corresponds to <code>SELECT</code> in SOQL queries. Example (ColumnSelection:[aggregation=NONE, columnName=Name, tableName=Order], ColumnSelection:[aggregation=NONE, columnName=CustomerID, tableName=Order], ColumnSelection:[aggregation=NONE, columnName=OrderDate, tableName=Order])
STATUS	Type Boolean Description Whether the query was successful. Possible Values • 1—Success • 0—Failed • Empty—Failed with no logged status or message
THROUGHPUT	Type Number Description Number of records retrieved in one second. Example 302.57
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
SUBQUERIES	Type Number Description Reserved for future use.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

Field	Details
	For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
TOTAL_MS	Type Number Description How long it took (in milliseconds) to prepare and execute the query and to retrieve the query results. Example 709
USER_ID	Type Id Description 15-character ID of the user accessing the external system. Example 00530000009M943

SEE ALSO:

[EventLogFile Supported Event Types](#)[EventLogFile](#)

External Data Source Callout Event Type

External Data Source Callout events represent external data callouts via the Salesforce Connect adapters for Amazon DynamoDB and Amazon Athena. This event type is available in the EventLogFile object in API version 56.0 and later.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer Guide](#).

Fields

Field	Details
ACTION	Type String Description Action performed by the callout. Possible Values For Amazon DynamoDB data source: • query • insert • delete • update

Field	Details
	• upsert For Amazon Athena data source: • query
DATA_SOURCE_NAME	Type String Description Name of the external data source being accessed.
EVENT_TYPE	Type String Description Type of event. Value is always <code>ExternalDataSourceCallout</code>.
EXTERNAL_OBJECT	Type String Description Name of the external object being accessed.
FETCH_MS	Type Number Description How long it took (in milliseconds) to retrieve the query results from the external data source. Example 127
FILTER	Type Text Description Field expressions to filter which rows to return. Corresponds to <code>WHERE</code> in queries.
LIMIT	Type Number Description Maximum number of rows to return for a query. Corresponds to Limit parameter in ExecuteStatement operation for an Amazon DynamoDB data source.
MESSAGE	Type String Description Error or warning message associated with the failed call.

Field	Details
NEXT_LINK	Type String Description Next link that the callout used to request a subsequent page of rows. A next link is provided in a previous response when the response includes only part of the result set. For requests to AWS data sources, this field stores the <code>nextToken</code> parameter that contains a unique hash string.
OFFSET	Type Number Description Number of rows to skip when paging through a result set. Corresponds to <code>OFFSET</code> in queries to Amazon Athena. This field is not supported by queries to Amazon DynamoDB.
OPERATION	Type String Description The operation that's being performed.
ORDERBY	Type String Description Field or column to use for sorting query results, and whether to sort the results in ascending (default) or descending order. Corresponds to <code>ORDER BY</code> in queries. Example • Country ASC • CustomerName DESC
ORGANIZATION_ID	Type Id Description 15-character ID of the organization. Example 00D000000000123
PARENT_CALLOUT	Type String Description If the callout requested a subsequent page of rows, this field identifies the initial callout whose request resulted in the multi-page result set. Example 4EoZtuBzzRIXSk-ysRdf1F-1

Field	Details
PROVIDER_TYPE	Type String Description Whether the callout was made by Salesforce Connect adapter for Amazon DynamoDB or Amazon Athena. Possible Values - amazonDynamodb - amazonAthena
REQUEST_ID	Type String Description Unique ID of a transaction. A transaction can contain one or more events. All events in a transaction have the same REQUEST_ID. Example 4A13-HSKv3CKs-0FKfceaV
RESPONSE_SIZE	Type Number Description The size of the callout response, in bytes.
ROWS_FETCHED	Type Number Description Number of records fetched by the callout. The records fetched by a callout can be a subset of a large result set. Example 200
SEARCH	Type String Description Search query string.
SELECT	Type String Description Comma-separated list of fields being queried. Corresponds to <code>SELECT</code> in queries. To query, Salesforce Connect adapter uses PartiQL with Amazon DynamoDB and SQL with Amazon Athena.

Field	Details
	Example CustomerID,OrderDate,OrderID,ShipCity,ShipCountry
STATUS	Type Boolean Description Whether the query was successful. Possible Values 1—Success 0—Failed
STATUS_CODE	Type Number Description The HTTP response status code for the request.
TABLE_NAME	Type String Description Name of the table being queried in the AWS data source.
THROUGHPUT	Type Number Description Number of records retrieved in one second. Example 3025.67
TIMESTAMP	Type DateTime Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

Field	Details
TOTAL_MS	Type Number Description How long it took (in milliseconds) to prepare and execute the query and to retrieve the query results.
USER_ID	Type Id Description 15-character ID of the user accessing the external data source. Example 00530000009M943

External OData Callout Event Type

External OData Callout events represent external data callouts via the OData 2.0 and OData 4.0 adapters for Salesforce Connect. This event type is available in the EventLogFile object in API version 40.0 and later.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer Guide](#).

Fields

Field	Details
ACTION	Type String Description Action performed by the callout. Possible Values - query - upsert - delete
BYTES	Type Number Description Size of the result set in bytes.
ENTITY	Type String Description Name of the external object being accessed.

Field	Details
	Example Order
EVENT_TYPE	Type String Description Type of event. Value is always ExternalODataCallout.
EXECUTE_MS	Type Number Description How long it took (in milliseconds) for Salesforce to prepare and execute the query. Available in API version 42.0 and later. Example 21
EXPAND	Type String Description Reserved for future use.
FETCH_MS	Type Number Description How long it took (in milliseconds) to retrieve the query results from the external system. Available in API version 42.0 and later. Example 127
FILTER	Type Text Description Field expressions to filter which rows to return. Corresponds to <code>WHERE</code> in SOQL queries and <code>\$filter</code> in OData queries. Example CustomerID eq 12345
LIBRARY	Type String Description Reserved for future use.

Field	Details
LIMIT	Type Number Description Maximum number of rows to return for a query. Corresponds to <code>LIMIT</code> in SOQL queries and <code>\$top</code> in OData queries. Example 200
MESSAGE	Type String Description Error or warning message associated with the failed call. Example The OData query result was too large, so the external data didn't load.
NEXT_LINK	Type String Description OData next link that the callout used to request a subsequent page of rows. A next link is provided in a previous response from the OData producer when the response includes only part of the result set. Available in API version 42.0 and later. However, this field isn't supported for the OData 2.0 adapter on orgs created before Spring '18. Example <code>http://services.example.org/Warehouse.svc/Orders?\$count=true&\$select=CustomerID,OrderID,RequiredDate,ShippedDate&\$top=301&\$skiptoken=10447</code>
OFFSET	Type Number Description Number of rows to skip when paging through a result set. Corresponds to <code>OFFSET</code> in SOQL queries and <code>\$skip</code> in OData queries. Example 10
ORDERBY	Type String Description Field or column to use for sorting query results, and whether to sort the results in ascending (default) or descending order. Corresponds to <code>ORDER BY</code> in SOQL queries and <code>\$orderby</code> in OData queries.

Field	Details
	Examples • ShipName • ShipName desc
ORGANIZATION_ID	Type Id Description 15-character ID of the organization. Example 00D000000000123
PARENT_CALLOUT	Type String Description If the callout requested a subsequent page of rows, this field identifies the initial callout whose request resulted in the multi-page result set. Available in API version 42.0 and later. However, this field isn't supported for the OData 2.0 adapter on orgs created before Spring '18. Example 4EoZtuBzzRIXSk-ysRdf1F-1
PROVIDER_TYPE	Type String Description Whether the OData 2.0 or OData 4.0 adapter made the callout. Possible Values • OData—OData 2.0 adapter • OData4—OData 4.0 adapter
RATE_LIMIT_USAGE_PERCENT	Type Number Description Consumed percentage of the org's limit of OData callouts per hour. Example 2.5—2.5% of the hourly callout limit has been consumed
REQUEST_ID	Type String Description Unique ID of a transaction. A transaction can contain one or more events. All events in a transaction have the same REQUEST_ID.

Field	Details
	Example 4A13-HSKv3CKs-0FKfceaV
REQUESTS	Type Number Description Reserved for future use.
ROWS	Type Number Description Total number of records in the result set. Available in API version 42.0 and later. Example 830
ROWS_FETCHED	Type Number Description Number of records fetched by the callout. The records fetched by a callout can be a subset of a large result set. Available in API version 42.0 and later. However, this field isn't supported for the OData 2.0 adapter on orgs created before Spring '18. Example 200
SEARCH	Type String Description Search query string. Corresponds to condition expressions in SOSL. Example contains(CustomerID,'10248') eq true or contains(ShipName,'10248') eq true
SELECT	Type String Description Comma-separated list of fields being queried. Corresponds to <code>SELECT</code> in SOQL queries and <code>\$select</code> in OData queries. Example CustomerID,OrderDate,OrderID,ShipCity,ShipCountry
STATUS	Type Boolean

Field	Details
	Description Whether the query was successful. Possible Values • 1—Success • 0—Failed
THROUGHPUT	Type Number Description Number of records retrieved in one second. Available in API version 42.0 and later. However, this field isn't supported for the OData 2.0 adapter on orgs created before Spring '18. Example 3025.67
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
TOTAL_MS	Type Number Description How long it took (in milliseconds) to prepare and execute the query and to retrieve the query results.
USER_ID	Type Id Description 15-character ID of the user accessing the external system.

Field	Details
	Example 00530000009M943

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Flow Execution Event Type

Flow Execution events contain information about flows that were executed including details such as total execution time, number of interviews, and number of errors.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
BOT_IDENTIFIER	Type string Description The ID of the bot.
BOT_SESSION_IDENTIFIER	Type string Description The bot session ID.
EVENT_TYPE	Type String Description The type of event. The value is always <code>FlowExecution</code> .
TIMESTAMP	Type String Description The time that the flow was executed in GMT. For example: 20210606032436.520.
REQUEST_ID	Type String

Field	Details
	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code>. For example: <code>TID:000000000000c00fff</code>.
<code>ORGANIZATION_ID</code>	Type Id Description The 15-character ID of the organization. For example: <code>00D000000000123</code>.
<code>USER_ID</code>	Type Id Description The 15-character ID of the user who executed the flow through the UI or the API. For example: <code>00530000009M943</code>
<code>PLANNER_IDENTIFIER</code>	Type string Description The ID of the agent planner.
<code>PROCESS_TYPE</code>	Type String Description The type of the flow. Valid values are: • <code>ActionableEventManagermentFlow</code>—A flow that triggers an actionable event orchestration process in the background and automatically executes different types of actions based on the event type. This value is available in API version 62.0 and later. • <code>ActionCadenceAutoLaunchedFlow</code>—A flow that's executed when a user completes a cadence step. This value is available in API version 56.0 and later. • <code>ActionCadenceStepFlow</code>—A screen flow used as a cadence step. This value is available in API version 56.0 and later. • <code>ActivityObjectMatchingFlow</code>—A flow that launches when Einstein Activity Capture detects and captures a new activity, such as an email. This type of flow runs in the background without user interaction. This value is available with Sync Email as Salesforce Activity in API version 64.0 and later. • <code>Appointments</code>—A flow for Lightning Scheduler. This value is available in API version 44.0 and later. • <code>ApprovalWorkflow</code>—An orchestration that's used for an approval process. This value is available in API version 63.0 and later. • <code>AutoLaunchedFlow</code>—A flow that doesn't require user interaction.

Field	Details
	• CheckoutFlow—A flow used in Lightning B2B Commerce to create a checkout in a store. This value is available in API version 48.0 and later. • ContactRequestFlow—A flow that lets customers request to be contacted by customer support. This flow is used to create contact request records. This value is available in API version 45.0 and later. • CustomerLifecycle—A Salesforce Surveys flow that lets you associate survey questions with different stages in customer lifecycles. This value is available in API version 49.0 and later and only when the Customer Lifecycle Designer license is enabled. • CustomEvent—A process that is invoked when it receives a platform event message. In the UI, it's an event process. This value is available in API version 41.0 and later. • DataCaptureFlow— In the UI, Data Capture flows configure the Form tab in the Field Service mobile app. When the Data Capture flow is launched, its Flow metadata is publicly available in JavaScript format. This value is available in API version 62.0 and later. • DcvrFrameworkDataCaptureFlow—A screen flow that presents assessment questions from Discovery Framework. Launches when invoked by a user on a mobile device. This type of flow collects or displays information, requires user interaction, and works offline or online. This value is available in API version 62.0 and later. • EvaluationFlow—A flow for evaluating custom entry and exit conditions in an orchestration. Uses the <code>isOrchestrationConditionMet</code> output variable and discards values from any other output variables. This value is available in API version 54.0 and later. • FieldServiceMobile—A flow for the Field Service mobile app. This value is available in API version 39.0 and later. • FieldServiceWeb—A flow for embedded Appointment Booking. Its UI label is Field Service Embedded Flow. This value is available in API version 41.0 and later. • Flow—A flow that requires user interaction because it contains one or more screens or local actions, choices, or dynamic choices. In the UI and Salesforce Help, it's a screen flow. Screen flows can be launched from the UI, such as with a flow action, Lightning page, or web tab. • FSClending—A flow for Financial Services Cloud Mortgage. This value is available in API version 46.0 and later. • IdentityUserRegistrationFlow—A flow to handle user registration and updates for single sign-on with the authentication provider framework. Available in API version 64.0 and later. • IndicatorResultFlow—A flow for Outcome Management that calculates and creates indicator results for a selected indicator performance period. This value is available with the Outcome Management license in API version 60.0 and later. • IndividualObjectLinkingFlow—A flow that associates individuals with interactions such as voice calls, messaging sessions, or case-related emails. This value is available in API version 58.0 and later. • InvocableProcess—A process that another process or the Invocable Actions resource in REST API invokes. This value is available in API version 38.0 and later. • Journey—An audience-driven flow for Marketing Cloud. This value is available in API version 57.0 and later.

Field	Details
	• LoginFlow—A flow for login. This value is available in API version 51.0 and later. • LoyaltyManagementFlow—A flow for the Loyalty Management app that's invocable by loyalty program processes. This value is available in API version 54.0 and later. • Orchestrator—An orchestration that organizes flows into groups of steps contained in a series of stages. This value is available in API version 53.0 and later. • PromptFlow—A flow for Prompt Builder. Pass data between Prompt Builder and the flow. This value is available in API version 60.0 and later. • RecommendationStrategy—Build recommendations for your users. A recommendation launches its assigned flow. This value is available in API version 54.0 and later. See Flow Builder Strategies. • RoutingFlow—A flow for Salesforce Omni-Channel routing and other business logic. This value is available in API version 52.0 and later. • Survey—A flow for Salesforce Surveys. From the UI, this type of flow is created in Survey Builder. This value is available in API version 42.0 and later. • SurveyEnrich—A Salesforce Surveys flow that uses the Survey Data Mapper. From the UI, this type of flow is created in the Survey Builder and requires an associated survey flow type. This value is available in API version 49.0 or later and only when the Customer Lifecycle Designer license is enabled. • Workflow—A process that is invoked when a record is created or edited. In the UI and Salesforce Help, it's a record change process. These values are reserved for future use. • ActionPlan • AppProcess • ApprovalWorkflow • CartAsyncFlow • DigitalForm • JourneyBuilderIntegration • LoginFlow • ManagedContentFlow • OrchestrationFlow • SalesEntryExperienceFlow • TransactionSecurityFlow • UserProvisioningFlow
FLOW_VERSION_ID	Type Id Description The ID of the flow version that was executed.

Field	Details
FLOW_LOAD_TIME	Type Number Description The time in milliseconds to load the flow's metadata.
TOTAL_EXECUTION_TIME	Type Number Description The total time in milliseconds to start and finish all flow interviews.
NUMBER_OF_INTERVIEWS	Type Number Description The number of flow interviews that started after the flow version was executed.
NUMBER_OF_ERRORS	Type Number Description The number of errors for all flow interviews after the flow version was executed.
TIMESTAMP_DERIVED	Type DateTime Description The time that the flow was executed in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

Group Membership Event Type

Group Membership events capture details about changes to public group and queue membership, such as when members are added to or removed from the public group or queue.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services.

Field	Details
	Example 96.43.144.26
CPU_TIME	Type Number Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity that took place in the app server layer.
EVENT_TYPE	Type String Description The type of event. The value is always <code>GroupMembership</code> .
GROUP_ID	Type Id Description ID of the group whose membership changed. Example 00GXXXXXXXXXXXXX
GROUP_TYPE	Type String Description The type of group. Valid values are: • R—Public group • Q—Queue Example R
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. Example GeJCsym5eyvtEK2I
MEMBER_ID	Type Id

Field	Details
	Description The ID of the member added to or removed from the group. Public groups can contain individual users, other groups, or users in a specified role or territory. Queues can contain individual users, roles, public groups, territories, connections, or partner users. Example 005XXXXXXXXXXXXX or 00GXXXXXXXXXXXXX
OPERATION	Type String Description The operation that occurred, such as a member being added to or removed from a group. Valid values are: - AddedGroupMember - DeletedGroupMember Example DeletedGroupMember
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. Example 00DXXXXXXXXXXXXX
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. Example 3nWgxWbDKWWDIk0FKfF5DV
RUN_TIME	Type Number Description The amount of time that the request took in milliseconds. Example 115
SESSION_KEY	Type String

Field	Details
	Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. Example d7DEq/ANa7nNZZVD
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. Example 20130715233322.670
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). Example 2015-07-27T11:32:59.555Z
URI	Type String Description The URI of the page that's receiving the request. Example /home/home.jsp
URI_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the URI of the page that's receiving the request. Example 005XXXXXXXXXXAY
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. Example 005XXXXXXXXXXXX

Field	Details
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API. Example 005XXXXXXXXXXXXXIA0

SEE ALSO:

[EventLogFile Supported Event Types](#)[EventLogFile](#)

Hostname Redirects Event Type

Hostname Redirect events contain details about blocked and successful redirections for your previous My Domain hostnames. The Hostname Redirects event type is available in the EventLogFile object in API version 56.0 and later.



Note: The HostnameRedirects event type is disabled by default. To enable this event type, use the `logRedirections` field on the MyDomainSettings Metadata API type or enable the **Log Redirections** setting in the Routing section of the My Domain Setup page.

This event is free for all customers with a 24-hour data retention period. The hostname redirections event is available in the API but not in the Event Monitoring Analytics app. You can also download the latest hostname redirections event log file through a button on the My Domain page.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or the [REST API Developer's Guide](#).

Fields

Field	Details
EVENT__TYPE	Type String Description The type of event. The value is always <code>HostnameRedirects</code>.
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. Example 20220715233322.670

Field	Details
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. Example 0000000062_0000x8Lz-
ORGANIZATION_ID	Type ID Description The 15-character ID of the org. Example 00D000000000345
USER_ID	Type ID Description This field is unused in the HostnameRedirects event type. The value is always null.
RUN_TIME	Type Number Description This field is unused in the HostnameRedirects event type. The value is always 0.
CPU_TIME	Type Number Description This field is unused in the HostnameRedirects event type. The value is always null.
URI	Type String Description This field is unused in the HostnameRedirects event type. The value is always null.
SESSION_KEY	Type String Description This field is unused in the HostnameRedirects event type. The value is always null.
LOGIN_KEY	Type String

Field	Details
	Description This field is unused in the HostnameRedirects event type. The value is always null.
MESSAGE	Type String Description This field is unused in the HostnameRedirects event type. The value is always null.
DOMAIN	Type Url Properties Filter, Sort Description This field is unused in the HostnameRedirects event type. The value is always null.
SOURCE_HOSTNAME	Type String Description The hostname of the URL from which the redirection originated. Example If <code>https://<i>oldMyDomainName</i>.my.salesforce.com</code> is redirected to <code>https://<i>newMyDomainName</i>.my.salesforce.com</code>, the value of this field is <i>oldMyDomainName</i>.my.salesforce.com
TARGET_HOSTNAME	Type String Description The hostname of the URL to which the user or API was redirected. Example If <code>https://<i>oldMyDomainName</i>.my.salesforce.com</code> is redirected to <code>https://<i>newMyDomainName</i>.my.salesforce.com</code>, the value of this field is <i>newMyDomainName</i>.my.salesforce.com
PATH	Type String Description The path of the originating URL request, up to the first question mark (?). The path is also used in the redirection target URL. However, this field doesn't include the query string, if present. Example If the user is redirected from <code>https://MyOldCompany.my.site.com/shop?q=sneakers</code> to

Field	Details
	<code>https://MyNewCompany.my.site.com/shop?q=sneakers</code>, the value of this field is <code>/shop</code>.
REDIRECT_REASON	Type String Description The reason for the hostname redirect event. Possible Values - Redirected due to a hostname mismatch.—The referring hostname was redirected to the current My Domain equivalent. - Redirection suppressed to prevent Lightning Out integration failure.—The <code>*.force.com</code> site URL can't be redirected for use with Lightning Out. To prevent issues, the original URL was processed as-is. To avoid issues after <code>*.force.com</code> site hostname redirections are stopped, update hard-coded references to the hostname in your Lightning Out integrations. For a Lightning Out code example that uses a site hostname, see Share Lightning Out Apps with Unauthenticated Users in the Salesforce Lightning Component Library. - Redirection was blocked because redirections for this hostname are disabled.—Only your last set of My Domain login hostnames is redirected. Those redirections are blocked when the My Domain Routing option Redirect previous My Domain URLs to your current My Domain is deselected or because you removed your previous My Domain. That option applies to legacy (non-enhanced) hostnames in production orgs until Spring '25. In non-production orgs, that option has no impact on redirections for legacy hostnames in Winter '25 and later. Non-production orgs include sandboxes, Developer Edition orgs, demo orgs, patch orgs, scratch orgs, and Trailhead Playgrounds. For information If the <code>SOURCE_HOSTNAME</code> is a legacy <code>*.force.com</code> site hostname, the redirection was blocked because the Redirect <i>previousSiteHostnames</i> URLs to your current My Domain site URLs Routing option was deselected on the My Domain Setup page. That option is available in production orgs until Spring '25. In non-production orgs, that option was removed in Winter '25. Non-production orgs include sandboxes, Developer Edition orgs, demo orgs, patch orgs, scratch orgs, and Trailhead Playgrounds. - Redirection was blocked because redirections for the legacy <code>SOURCE_HOSTNAME</code> are no longer supported.—If your org was created before June 2022, Salesforce served the org on a different set of hostnames until enhanced domains were deployed. The <code>SOURCE_HOSTNAME</code> is one of those hostnames. For non-production orgs, redirections for those hostnames stopped in Winter '25.
IS_BLOCKED_REDIRECTION	Type Boolean Description Indicates whether the redirection was blocked.

Field	Details
	Possible Values 1—The redirection was blocked and returned an HTTP 404 response. 0—The redirection proceeded and returned an HTTP 301 or 307 response.
REFERRER	Type String Description The absolute or partial address from which the request to the <code>SOURCE_HOSTNAME</code> came. The <code>Referrer-Policy</code> HTTP Header of the request determines how much of the URL is shared. For example, if a user clicked a link to the <code>SOURCE_HOSTNAME</code> from a web page, and that web page is on a different domain: - if the <code>Referrer-Policy</code> HTTP Header is <code>no-referrer-when-downgrade</code>, <code>REFERRER</code> includes the origin, path, and query-string parameters up to the first hash (<code>#</code>), if present. - if the <code>Referrer-Policy</code> HTTP Header is <code>strict-origin-when-cross-origin</code>, <code>REFERRER</code> includes the origin only. - if the <code>Referrer-Policy</code> HTTP Header is <code>same-origin</code>, <code>REFERRER</code> is null. Examples <code>https://www.example.com</code> <code>https://www.example.com/page/page/index.htm</code> <code>https://www.example.com/page/index.htm?q="Salesforce"</code>
ORIGIN	Type String Description The origin (protocol, hostname, and port) that caused the request to the <code>SOURCE_HOSTNAME</code>. For example, if a website on a different domain makes an XMLHttpRequest (XHR) to <code>SOURCE_HOSTNAME</code>, <code>ORIGIN</code> contains the base URL of that website. The port isn't included in the origin information with all requests. <code>ORIGIN</code> can be null in a number of situations, including but not limited to cross-origin requests and origins with a restrictive <code>Referrer-Policy</code> header. For example, if the request to the <code>SOURCE_HOSTNAME</code> is sent from a site external to Salesforce with a <code>RequestMode</code> of <code>no-cors</code>, <code>ORIGIN</code> is null. Examples <code>https://www.example.com</code> <code>https://www.example.com:443</code>
TIMESTAMP_DERIVED	Type DateTime

Field	Details
	Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). The time zone is always GMT.
	Example 2022-07-27T11:32:59.555Z.
USER_ID_DERIVED	Type String
	Description This field is unused in the HostnameRedirects event type. The value is always null.
CLIENT_IP	Type String
	Description The IP address of the client that made this request.
	Possible Values/Example 111.43.144.26
URI_ID_DERIVED	Type String
	Description This field is unused in the HostnameRedirects event type. The value is always null.

Usage

Use the information in the Hostname Redirects event log to determine the hostnames to update in your org after you deploy a change to your My Domain name. You can also use the log to develop communications to your customers and users about the changed hostnames. For example, you can encourage users to use the new hostnames and update their bookmarks. For more information on the steps to take after a My Domain change, see [Update Your Org and Test My Domain Changes](#) in Salesforce Help.

To access the log, use the HostnameRedirects event type from the EventLogFile object. Alternatively, you can download the current hostname redirections event log by clicking **Download Redirections Log** on the My Domain Setup page.

Each event, or each row in the redirection log, represents a redirection for a specific requested URL. Subsequent requests to the same URL within the hour following that request, however, aren't logged. If your last My Domain change included enhanced domains deployment, the log includes redirections for the old hostnames listed on [My Domain URL Format Changes with Enhanced Domains Deployment](#) in Salesforce Help.



Note: To keep the size of the log file manageable, the log includes one entry for each redirected hostname and path combination within an hour. As a result, the log includes all redirected hostname and path combinations, but only includes the first redirection within each hour.

For example, if `https://MyCompany.my.site.com/shop` is redirected at 02:01 PM and `https://MyCompany.my.site.com/shop?q=sneakers` is redirected for another user at 02:02 PM, only the redirection that occurred at 02:01 PM is captured for `MyCompany.my.site.com/shop` for that hour. But if

`https://MyCompany.my.site.com/help` is redirected at 2:05 PM, that redirection is captured on a new line because the `MyCompany.my.site.com/help` hostname and path combination differs from `MyCompany.my.site.com/shop`.

Similarly, if the redirection of `https://MyCompany.my.site.com/contactUs` is blocked at 07:02 AM and `https://MyCompany.my.site.com/contactUs` is redirected at 07:11 AM, only the blocked redirection for `MyCompany.my.site.com/contactUs` is captured in the log for that hour.

Only one hostname redirection log file is available at a time. When the daily incremental event log file is generated during the daily background process, the new file replaces the existing file. When you download the redirections log from the My Domain Setup page, you get the latest daily log file in CSV format.

If the log file doesn't exist, either the log generation process hasn't run yet or there's no redirection data to report for that 24-hour window. The log file is generated only when at least one redirection occurred for the day.

To collect hostname redirection logs for multiple days, schedule a daily query of the Hostname Redirects event type via REST API. For example, you can configure a cron job in Unix or a scheduled task in Windows to run the query.

Salesforce CLI Example

To use Salesforce CLI to query the Hostname redirects log, use the `sf data query` command to query the HostnameRedirects EventType.

First, download and install [Salesforce CLI](#).

Example

This Unix example authorizes Salesforce CLI to access your org and sets `orgAlias` to your org login URL. This method prompts you to log in to your org via a browser to grant Salesforce CLI access. To query event log files, log in as a user with the View Event Log Files and API Enabled permissions.

```
sf org web login --alias orgAlias --instance-url https://MyDomainName.my.salesforce.com
```

Example response

After you authenticate with a user via a browser, this response confirms that Salesforce CLI is authorized for use in your org.

```
Successfully authorized admin@mycompany.com with org ID 00D000000000000aIW
```

Then export the HostnameRedirects log to a CSV file.

Example

This example exports the HostnameRedirects EventType to a CSV file in your org, where `orgAlias` is your org's alias within Salesforce CLI.

```
ORGALIAS=orgAlias; QUERYRESULT=$(sf data query --target-org "$ORGALIAS" --query "SELECT
  LogDate, LogFile FROM EventLogFile WHERE EventType='HostnameRedirects' ORDER BY
  CreatedDate DESC LIMIT 1" --json); QUERYSTATUS=$(echo "$QUERYRESULT"|grep \"status\"|cut
  -d : -f 2|cut -d , -f 1); if [[ \"$QUERYSTATUS\" -eq 0 ]]; then LOGDATE=$(echo
  \"$QUERYRESULT"|grep LogDate|cut -d \" -f 4|cut -d T -f 1); if [[ \"$LOGDATE\" == \"\" ]];
  then echo \"No daily event log file exists for hostname redirects.\"; else
  DOWNLOADPATH=$(echo \"$QUERYRESULT"|grep \"url\"|cut -d \" -f 4); ORGDISPLAY=$(sf org
  display --target-org \"$ORGALIAS\" --json 2> /dev/null); SESSION=$(echo \"$ORGDISPLAY"|grep
  accessToken|cut -d \" -f 4); ORGURL=$(echo \"$ORGDISPLAY"|grep instanceUrl|cut -d \" -f
  4); curl -H \"Authorization: Bearer ${SESSION}\" --silent ${ORGURL}${DOWNLOADPATH}/LogFile
  > HostnameRedirectEvent-${LOGDATE}.csv; fi; else echo \"$QUERYRESULT\"; fi
```

Example CSV formatted response

```
"EVENT_TYPE","TIMESTAMP","REQUEST_ID","ORGANIZATION_ID","USER_ID","RUN_TIME",
"CPU_TIME","URI","SESSION_KEY","LOGIN_KEY","MESSAGE","DOMAIN","SOURCE_HOSTNAME",
"TARGET_HOSTNAME","PATH","REDIRECT_REASON","IS_BLOCKED_REDIRECTION","REFERRER",
"ORIGIN","TIMESTAMP_DERIVED","USER_ID_DERIVED","CLIENT_IP","URI_ID_DERIVED"
"HostnameRedirects","20220803011210","4kTkZZ1PzwSSHdKcagbl7-","00D000000000aIW",
"", "0", "", "", "", "", "Redirection was blocked because redirections for the legacy
SOURCE_HOSTNAME are no longer supported.", "", "ExperienceCloudSubdomain.force.com",
"", "", "", "0", "https://partner.example.com/pagename.html", "",
"2022-08-03T01:12:10.015Z", "", "198.51.100.0", " "
"HostnameRedirects","20220803022225","4kTkSZ1PzwSTHDkCagbl9-","00D000000000aIW",
"", "0", "", "", "", "", "Redirection was blocked because redirections for the legacy
SOURCE_HOSTNAME are no longer supported.", "",
"SalesforceSitesSubdomain.secure.force.com", "", "", "", "0", "",
"https://partner2.example.com", "2022-08-03T02:22:25.015Z", "", "2001:DB8:", ""
"HostnameRedirects","20220803025230","4kNP4KyC_ddbIOGxqZ8Lz-","00D000000000aIW",
"", "0", "", "", "", "", "Redirection prevented due to a hostname mismatch.", "",
"oldMyDomainName.my.salesforce.com", "currentMyDomainName.my.salesforce.com", "",
"", "0", "https://www.example.com/login_hub.htm", "https://www.example.com",
"2022-08-03T02:52:30.015Z", "", "203.0.113.0", ""
"HostnameRedirects","20220803081241","4kTkSZ1PzwSTHDkCagbl9-","00D000000000aIW",
"", "0", "", "", "", "", "Redirection was blocked because redirections for the legacy
SOURCE_HOSTNAME are no longer supported.", "",
"SalesforceSitesSubdomain.secure.force.com", "", "", "", "0",
"https://myDomainName.my.site.com/store/Page1", "", "2022-08-03T08:12:41.015Z", "",
"Salesforce.com IP", ""
"HostnameRedirects","20220803113801","4kNQs7BYKbSbIWGxqZ8Lz-","00D000000000aIW",
"", "0", "", "", "", "", "Redirection prevented due to a hostname mismatch.", "",
"oldMyDomainName.lightning.force.com", "currentMyDomainName.lightning.force.com",
"", "", "0",
"https://sandboxMyDomainName--SandboxName.sandbox.lightning.force.com/r/
product__c/a000000000000000IAI/view",
"https://sandboxMyDomainName--SandboxName.sandbox.lightning.force.com",
"2022-08-03T11:38:01.015Z", "", "Salesforce.com IP", ""
```

For more information on Salesforce CLI, see the Salesforce CLI Setup Guide, Salesforce CLI Command Reference, and the Salesforce DX Developer Guide.

REST API Example

To use REST API to query the Hostname Redirects event log, use the [Query](#) resource to retrieve field values from a record. Specify the fields you want to retrieve in the fields parameter and use the GET method of the resource.

Example

This example retrieves the HostnameRedirects event log based on `Field` and `EventType` via a GET request. Replace `token` with your access token. In a production org, replace `MyDomainName` with your My Domain name. In a sandbox, replace `MyDomainName.my.salesforce.com` with your org's My Domain login hostname.

```
curl https://MyDomainName.my.salesforce.com/services/data/v66.0/query?q=SELECT+
LogDate%2C+LogFile+FROM+EventLogFile+WHERE+EventType%3D%27HostnameRedirects%27
+ORDER+BY+CreatedDate+DESC+LIMIT+1 -H "Authorization: Bearer token"
```

Example raw response

```
{ "totalSize":1, "done":true, "records":[{"attributes":
{ "type":"EventLogFile", "url":"/services/data/v56.0/objects/EventLogFile/
0AT00000003KxUSWA0"}, "LogDate":"2022-08-03T00:00:00.000+0000", "LogFile":"
/services/data/v56.0/objects/EventLogFile/0AT00000003KxUSWA0/LogFile"}]}
```

The log file can be downloaded by using curl with the same Authorization header while setting the URL path to the `LogFile` value from the output.

For more information on accessing event log files via REST API, see [Using Event Monitoring](#) in the REST API Developer Guide.

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Insecure External Assets Event Type

Insecure External Assets events contain information about external assets. External assets include images or videos accessed by users over an insecure HTTP protocol. The event lists all your Salesforce pages that contain assets hosted insecurely on third-party sites that users loaded with a Chrome, Firefox, Microsoft Edge, or Safari browser. The `INSECURE_URI` field contains the URI being used to load the asset insecurely. The Insecure External Assets event type is available in the EventLogFile object in API version 42.0 and later.

Assets over HTTP can be manipulated through man-in-the-middle and other types of attacks. These attacks can trick users into sending their Salesforce credentials to malicious sites. Always use HTTPS in your custom code and templates for any asset you're loading from external sites.



Important: Because HTTPS connections are required to load external assets, Insecure External Assets events no longer apply. In Spring '25 and later, this event type captures no data.

To view blocked redirections and content security policy (CSP) violations for your org, use the [BrowserPolicyViolation](#) object.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or the [REST API Developer's Guide](#).

Fields

Field	Details
ASSET_TYPE	Type String Description Type of insecure asset. Possible Values • Base URI • Connect • Font • Frame Ancestor: External page that embeds the Salesforce page in an iframe • Frame • Image

Field	Details
	• Media • Object • Other • Plugin Types • Script • Style
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
CPU_TIME	Type Number Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DISPOSITION	Type String Description If the insecure external asset is related to your content security policy (CSP), the HTTP header that identified the insecure asset. Available in API version 61.0 and later. Possible Values • <code>enforce</code>—The <code>Content-Security-Policy</code> header identified the insecure external asset. • <code>report</code>—The <code>Content-Security-Policy-Report-Only</code> header identified the insecure external asset.
DOCUMENT_URI	Type String Description URL of the page that contains the insecure asset, excluding the query parameter. Example <code>https://company.my.salesforce.com/00XXXXXXXXX</code>
EVENT_TYPE	Type String

Field	Details
	Description The type of event. The value is always <code>InsecureExternalAssets</code> .
INSECURE_URI	Type String Description Insecure external asset URL being used to load an asset insecurely. For example, loading Javascript libraries using <code>http://ajax.googleapis.com/</code> in your custom code logs an Insecure External Asset Event with the <code>INSECURE_URI</code> field set to this URL. Find this reference in your code and update it to use <code>https://ajax.googleapis.com/</code> instead. Example <code>http://pbs.twimg.com/profile_images/5699091412070816/Z4Stwts_normal.jpeg</code>
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: <code>GeJCsym5eyvtEK2I</code> .
NETWORK_ID	Type String Description The ID of the Experience Cloud site related to the request, if applicable. Available in API version 61.0 and later.
ORGANIZATION_ID	Type String Description The 15-character ID of the org. Example <code>00D0000000000123</code>
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code> . For example: <code>3nWgxWbDKWWDIk0FKfF5DV</code> .

Field	Details
RUN_TIME	Type Number Description The amount of time that the request took in milliseconds.
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
TYPE	Type String Description Type of Salesforce page. Possible Values - Appserver—Page without My Domain subdomain (for example, https://na44.salesforce.com) - Communities—Customer Experience Cloud site - Email—Email preview - Login—Login page (for example, https://login.salesforce.com) - Mydomain—Page on My Domain subdomain (for example, https://mycompany.my.salesforce.com) - Sites—Customer site - Static—Static content (for example, https://sfdcstatic.com) - Unknown—other type of page

Field	Details
UNIQUE_ID	Type String Description The 32-character ID of the event log file in which the insecure external asset event data is found. Example 44e128a5-ac7a-4c9a-be4c-224b6bf81b20
URI	Type String Description The URI of the page that's receiving the request. For example: /home/home.jsp.
URI_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the URI of the page that's receiving the request.
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API. For example: 00590000000I1SNIA0.

Usage

UNIQUE_ID is used by Salesforce Customer Support to troubleshoot any issues that occur.

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Insufficient Access Event Type

Insufficient Access events contain details about errors relating to insufficient account, case, contact, and opportunity record access, so that you can troubleshoot and resolve access issues for your users.



Note: The Insufficient Access event type is disabled by default. You can enable this event type for a period of 24 hours by contacting Salesforce Customer Support.

These insufficient access error scenarios are logged:

- The user can't share a case, contact, or opportunity because the user doesn't have permission to share the parent account or the recipient of the share doesn't currently have read access to the parent account.
- The user can't change ownership of a case, contact, or opportunity because the user doesn't have permission to share the parent account or the new owner doesn't currently have read access to the parent account.
- The user can't change the parent account of a case, contact, or opportunity because the user doesn't have permission to share the new parent account or the owner of the case, contact, or opportunity doesn't have read access to the new parent account.

Insufficient access errors resulting from bulk operations involving two or more records aren't logged.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

For more information on interpreting Insufficient Access events, see this [knowledge article](#).

Fields

Field	Details
ACCESS_ERROR	Type String Description The type of insufficient access error that the user received. Valid values are: • DATA_NOT_AVAILABLE—The record is no longer accessible. For example, a record was deleted and moved to the Recycle Bin. • INVALID_TYPE—The record type doesn't exist. • NO_ACCESS—The user doesn't have the required access level to complete the attempted action on the record. Example NO_ACCESS
ACTUAL_LOGGED_IN_USER_ID	Type Id Description The 15-character ID of the user who initiated the action that caused the insufficient access error. For example, a user attempts to transfer ownership of a record to a teammate, but the operation fails because the teammate doesn't have the required access. In this scenario, the ACTUAL_LOGGED_IN_USER_ID is the user who attempted to transfer access, and the USER_ID is their teammate. Example 005XXXXXXXXXXXXX

Field	Details
ENTITY_TYPE	Type String Description The object for which the user received the insufficient access error. Access errors for the account, case, contact, and opportunity objects are supported. Example Account
ERROR_DESCRIPTION	Type String Description Description of the insufficient access error that the user received. Example User 005XXXXXXXXXXXXX doesn't have full access for the record 001XXXXXXXXXXXXX.
ERROR_TIMESTAMP	Type String Description The time in GMT that the insufficient access error occurred. Example 20130715233322.670
EVENT_TYPE	Type String Description The type of event. The value is always <code>InsufficientAccess</code>.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. Example 00DXXXXXXXXXXXXX
RECORD_ID	Type String Description The ID of the record that the user doesn't have access to. Example 001XXXXXXXXXXXXX

Field	Details
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. Example 3nWgxWbDKWWDIk0FKfF5DV
REQUESTED_ACCESS_LEVEL	Type String Description The access level required by the user's attempted action on the record. Valid values are: • DELETE • FULL • READ • TRANSFER • WRITE Example FULL
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. Example 20130715233322.670
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). Example 2015-07-27T11:32:59.555Z
USER_ID	Type Id Description The 15-character ID of the user for whom the insufficient access error occurred, either when the user couldn't access a record, the user couldn't complete an operation, or the user was

Field	Details
	the intended recipient of a record transfer that failed because the user didn't have the required access. Example 005XXXXXXXXXXXXX
USER_ID_DERIVED	Type Id Description The 18-character case-insensitive ID of the user for whom the insufficient access error occurred, either when the user couldn't access a record or the user was the intended recipient of a record transfer that wasn't completed. Example 005XXXXXXXXXXXXXIA0

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

[Knowledge Article: Interpret Insufficient Access Event Logs](#)

Invocable Action Event Type

Invocable Action events capture the calls to Salesforce Invocable Actions. This is particularly useful to monitor actions invoked during Agentforce flows. This event type is available in API versions 64.0 and later.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
ACTION_NAME	Type String Description Name of the action.
ACTION_TYPE	Type String Description InvocableActionType being referenced.
ACTION_VERSION	Type String

	Description The invocable action version.
AGENT_ACTION	Type String Description The API name of the agent action that invoked the action. This field is available in API version 66.0 or later.
API_CALLER	Type String Description Identifier of the API caller. This is only populated when the action is invoked from a REST API call
BOT_IDENTIFIER	Type string Description The ID of the bot.
BOT_SESSION_IDENTIFIER	Type string Description The bot session ID.
DURATION	Type String Description Time (in nanos) taken to process this set of requests.
EVENT_TYPE	Type String Description The type of event. The value is always <code>InvocableAction</code> .
FLOW_PROCESS_TYPE	Type String Description The process type of the calling flow.
FLOW_VERSION_ID	Type String Description The ID of the version of the calling flow.

INVOCATION_SOURCE

Type

String

Description

Indicates the source type that invoked the action. Valid values are:

- Agent Action
- Apex
- Bot
- Flow
- Internal
- Prompt Template
- REST

This field is available in API version 66.0 or later.

INVOKING_APEX_CLASS_NAME

Type

String

Description

The fully qualified name of the Apex class that invoked the action. This field is available in API version 66.0 or later.

ORGANIZATION_ID

Type

Id

Description

The number of invoked requests.

PLANNER_IDENTIFIER

Type

string

Description

The ID of the agent planner.

PROMPT_TEMPLATE

Type

string

Description

The API name of the prompt template that invoked the action. This field is available in API version 66.0 or later.

REQUEST_COUNT

Type

Number

Description

The number of invoked requests.

REQUEST_ID

Type

String

	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.
TIMESTAMP	Type String Description The access time of Salesforce services in GMT.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
USER_ID	Type String Description ID of the user employing salesforce.com services, whether through the user interface or API

Knowledge Article View Event Type

Knowledge Article View events contain user activity with your knowledge base.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
ARTICLE_ID	Type Id Description The 15-character ID of the article. For example: 00Dxx0000001gEb.
ARTICLE_STATUS	Type Character Description Possible values are: • D—Draft

- O—Online
- A—Archived

ARTICLE_VERSION

Type

Number

Description

Article version number.

For example: 2.

ARTICLE_VERSION_ID

Type

Id

Description

The 15-character ID of the article version.

For example: ka0R00000005rt6.

CONTEXT

Type

String

Description

Context of the request.

Description

Possible values are:

- Apex
- API
- empty string

ENTITY

Type

String

Description

Entity requested.

For example: Knowledge__kav.

EVENT_TYPE

Type

String

Description

The type of event. The value is always KnowledgeArticleView.

LANGUAGE

Type

String

Description

iso-code of the language.

For example: en_US/

Example	
LARGE_LANGUAGE_MODEL	Type String Description The name of the large language model (LLM) that generated the knowledge article version.
LAST_VERSION	Type Boolean Description True if it is the last version. Possible values are: • True • False
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: 00D000000000123.
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. For example: 3nWgxWbDKWWDIk0FKfF5DV.
SESSION_ID	Type String Description Session ID of the request. For example: gV7pCSW2vGaaJNF13GSpuPIjNbKVbSxRvx34LJsIvuc=. Example
TIMESTAMP	Type String Description The access time of Salesforce services in GMT.

For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type

DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. The timezone is GMT.

USER_ID

Type

Id

Description

The 15-character ID of the user who's using Salesforce services through the UI or the API.

For example: 00530000009M943

USER_ID_DERIVED

Type

Id

Description

The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API.

For example: 00590000000I1SNIA0.

USER_TYPE

Type

Character

Description

User type of the request.

Possible values are:

- A—App
 - C—Customer Portal
 - P—Partner Portal
 - G—guest
 -
-

Lightning Error Event Type

Lightning Error events represent errors that occurred during user interactions with Lightning Experience and the Salesforce mobile app. This event type is available in the EventLogFile object in API version 39.0 and later.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
APP_NAME	Type String Description The name of the application that the user accessed.
BROWSER_NAME	Type String Description The name of the browser that the user accessed. Example Chrome, Safari
BROWSER_VERSION	Type String Description The version of the browser that the user accessed in <code>major.minor version</code> format. Some browsers don't provide a minor version.
CLIENT_GEO	Type String Description The geolocation of the client in the form of <code><Country>/<State Province></code> . Example United States/California
CLIENT_ID	Type String Description The API client ID.
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". Example 96.43.144.26
COMPONENT_NAME	Type String

Field	Details
	Description The internal name of the standard component that generated the error. The Salesforce developer assigned the name when the standard component was created. Example SaveEdit, Lead.CCPM_sendSMS, ChangeOwnerOne
CONNECTION_TYPE	Type String Description The type of connection. Possible Values • CDMA1x • CDMA • EDGE • EVDO0 • EVDOA • EVDOB • GPRS • HRPD • HSDPA • HSUPA • LTE • WIFI
DEVICE_ID	Type String Description The unique identifier used to identify a device when tracking events. <code>DEVICE_ID</code> is a generated value that's created when the mobile app is initially run after installation.
DEVICE_MODEL	Type String Description The name of the device model. Example iPad, iPhone
DEVICE_PLATFORM	Type String

Field	Details
	Description The type of application experience in <code>name:experience:form</code> format. Possible Values • <code>name: APP_BUILDER, CUSTOM, S1, SFX</code> • <code>experience: BROWSER, HYBRID</code> • <code>form: DESKTOP, PHONE, TABLET</code>
DEVICE_SESSION_ID	Type Id Description The unique identifier of the user's session based on page load time. If the user reloads a page, it starts a new session. Example 321a1ddfaf924803a075f1e69fc87bc06f53ccd0
EVENT_TYPE	Type String Description The type of event. The value is always <code>LightningError</code>.
LOGIN_KEY	Type String Description The string that ties together all events in a user's login session. It starts with a login event and ends with either a logout event or the user session expiring. Example GeJCsym5eyvtEK2I
MESSAGE	Type String Description The error message generated.
ORGANIZATION_ID	Type String Description The 15-character ID of the org. Example 00D000000000123

Field	Details
OS_NAME	Type String Description The operating system name, derived from USER_AGENT. Example Android, iOS, OSX, Windows
OS_VERSION	Type String Description The operating system version, derived from USER_AGENT.
PAGE_APP_NAME	Type String Description The internal name of the application that the user accessed from the App Launcher. Example LightningSales
PAGE_CONTEXT	Type String Description Context of the page where the event occurred. Example clients:cardsContainer
PAGE_ENTITY_ID	Type Id Description The unique entity identifier of the event. Example 0013000000I3zJAAAZ
PAGE_ENTITY_TYPE	Type String Description The entity type of the event. Example Task, Account

Field	Details
PAGE_START_TIME	Type Number Description The time when the page was initially loaded, measured in milliseconds. Example 1471564788642
PAGE_URL	Type String Description Relative URL of the top-level Lightning Experience or Salesforce mobile app page that the user opened. The page can contain one or more Lightning components. Multiple record IDs can be associated with PAGE_URL. Example /sObject/0064100000JXITSAA5/view
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. Example 3nWgxWbDKWWDIk0FKfF5DV
SDK_APP_TYPE	Type String Description The mobile SDK application type. Possible Values • HYBRID • HYBRIDLOCAL • HYBRIDREMOTE • NATIVE • REACTNATIVE
SDK_APP_VERSION	Type String Description The mobile SDK application version number. Example 5.0

Field	Details
SDK_VERSION	Type String Description The mobile SDK version number. Example 2.1.0
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all events in Lightning Experience within a session. When a user logs out and logs in again, a new session is started. Example cdd09305cb6babf34059e27f70e47f1b11dec868
STACK_TRACE	Type String Description The stack trace contains the location in the code where the error occurred along with the calling frames that led to the error.
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. Example 20130715233322.670
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). Example 2015-07-27T11:32:59.555Z. The timezone is GMT.
UI_EVENT_ID	Type String Description ID of the Lightning event type.

Field	Details
	Possible Values • ltng:error • ltng:interaction • ltng:pageView • ltng:performance
UI_EVENT_SEQUENCE_NUM	Type Number Description An auto-incremented sequence number of the current event since the session started.
UI_EVENT_SOURCE	Type String Description The source of the error event. Examples Here are some examples of error flags returned in this field. • AuraError • Error • InvalidStateError • RangeError • ReferenceError • SecurityError • SyntaxError • TypeError • unknown
UI_EVENT_TIMESTAMP	Type Number Description The time at which this event occurred, measured in milliseconds. Example 1479769912796
UI_EVENT_TYPE	Type String Description The type of error event. Example error, info, warn

Field	Details
USER_AGENT	Type String Description The numeric code for the type of client used to make the request (for example, browser, application, or API) as a string.
USER_ID	Type String Description The 15-character ID of the user accessing Salesforce services through the UI or API. Example 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case-insensitive ID of the user who's using Salesforce services through the UI or the API. Example 005900000000I1SNIA0
USER_TYPE	Type String Description The category of user license of the user accessing Salesforce services through the UI or API. Possible Values • A: Automated Process • b: High Volume Portal • C: Customer Portal User • D: External Who • F: Self Service • G: Guest • L: Package License Manager • N: Salesforce to Salesforce • n: CSN Only • O: Power Custom • o: Custom • P: Partner • p: Customer Portal Manager • S: Standard

Field	Details
	• x: Salesforce Administrator

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Lightning Interaction Event Type

Lightning Interaction events track user actions in Lightning Experience and the Salesforce mobile app, such as the user clicking, tapping, or scrolling on a page. This event type is available in the EventLogFile object in API version 39.0 and later.



Warning: The Lightning Interaction Event type is a best effort logging of user interactions but is not intended to meet privacy and security audit requirements. Not all interactions or CRUD operations are tracked and data loss may occur.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
APP_NAME	Type String Description The name of the application that the user accessed.
BROWSER_NAME	Type String Description The name of the browser that the user accessed. Example Chrome, Safari
BROWSER_VERSION	Type String Description The version of the browser that the user accessed in <code>major.minor version</code> format. Some browsers don't provide a minor version.
CLIENT_GEO	Type String Description The geolocation of the client in the form of <code><Country>/<State Province></code> .

Field	Details
	Example United States/California
CLIENT_ID	Type String Description The API client ID.
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". Example 96.43.144.26
COMPONENT_NAME	Type String Description The internal name of the standard component that the user interacted with. The Salesforce developer assigned the name when the standard component was created. Example SaveEdit, Lead.CCPM_sendSMS, ChangeOwnerOne
CONNECTION_TYPE	Type String Description The type of connection. Possible Values • CDMA1x • CDMA • EDGE • EVDO0 • EVDOA • EVDOB • GPRS • HRPD • HSDPA • HSUPA • LTE

Field	Details
	WIFI
DEVICE_ID	Type String Description The unique identifier used to identify a device when tracking events. <code>DEVICE_ID</code> is a generated value that's created when the mobile app is initially run after installation.
DEVICE_MODEL	Type String Description The name of the device model. Example iPad, iPhone
DEVICE_PLATFORM	Type String Description The type of application experience in <code>name:experience:form</code> format. Possible Values <code>name: APP_BUILDER, CUSTOM, S1, SFX</code> <code>experience: BROWSER, HYBRID</code> <code>form: DESKTOP, PHONE, TABLET</code>
DEVICE_SESSION_ID	Type Id Description The unique identifier of the user's session based on page load time. When the user reloads a page, a new session is started. Example 321a1ddfaf924803a075f1e69fc87bc06f53ccd0
DURATION	Type Number Description The duration in milliseconds since the page start time.
EVENT_TYPE	Type String Description The type of event. The value is always <code>LightningInteraction</code>.

Field	Details
GRANDPARENT_UI_ELEMENT	Type String Description Grandparent scope of the page element where the event occurred.
LOGIN_KEY	Type String Description The string that ties together all events in a user's login session. It starts with a login event and ends with either a logout event or the user session expiring. Example GeJCsym5eyvtEK2I
ORGANIZATION_ID	Type String Description The 15-character ID of the org. Example 00D000000000123
OS_NAME	Type String Description The operating system name, derived from USER_AGENT. Example Android, iOS, OSX, Windows
OS_VERSION	Type String Description The operating system version, derived from USER_AGENT.
PAGE_APP_NAME	Type String Description The internal name of the application that the user accessed from the App Launcher. Example LightningSales
PAGE_CONTEXT	Type String

Field	Details
	Description Context of the page where the event occurred. Example <code>clients:cardsContainer</code>  Note: A value of UNKNOWN means that the page hasn't finished loading, so the context can't be identified.
PAGE_ENTITY_ID	Type Id Description The unique entity identifier of the event. Example <code>0013000000I3zJAAZ</code>
PAGE_ENTITY_TYPE	Type String Description The entity type of the event. Example <code>task, contacts</code>  Note: A value of UNKNOWN means that the page hasn't finished loading or the page isn't displaying a record, so the entity type can't be identified.
PAGE_START_TIME	Type Number Description The time when the page was initially loaded, measured in milliseconds. Example <code>1471564788642</code>
PAGE_URL	Type String Description Relative URL of the top-level Lightning Experience or Salesforce mobile app page that the user opened. The page can contain one or more Lightning components. Multiple record IDs can be associated with PAGE_URL. Example <code>/sObject/0064100000JXITSAA5/view</code>  Note: A value of UNKNOWN means that the page hasn't finished loading, so the URL can't be identified.

Field	Details
PARENT_UI_ELEMENT	Type String Description Parent scope of the page element where the event occurred.
RECORD_ID	Type String array Description The IDs of one or more records that the user interacted with. For more information on the user interaction, see UI_EVENT_TYPE and UI_EVENT_SOURCE fields. Example ["5004100000JaGGLAA3", "5004100000Dn79CAAR", "50041000007KeugAAC"]
RECORD_TYPE	Type String Description The type of record object that the user interacted with. Example Account, Opportunity
RELATED_LIST	Type String Description The type of related list that the user clicked. Example Opportunity
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. Example 3nWgxWbDKWWDIk0FKfF5DV
SDK_APP_TYPE	Type String Description The mobile SDK application type.

Field	Details
	Possible Values • HYBRID • HYBRIDLOCAL • HYBRIDREMOTE • NATIVE • REACTNATIVE
SDK_APP_VERSION	Type String Description The mobile SDK application version number. Example 5.0
SDK_VERSION	Type String Description The mobile SDK version number. Example 2.1.0
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all events in Lightning Experience within a session. When the user logs out and logs in again, a new session is started. Example cdd09305cb6babf34059e27f70e47f1b11dec868
TARGET_UI_ELEMENT	Type String Description The target page element where the event occurred. Example tabitem-link
TIMESTAMP	Type String Description The access time of Salesforce services in GMT.

Field	Details
	For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). Example 2015-07-27T11:32:59.555Z. The timezone is GMT.
UI_EVENT_ID	Type String Description Id of the Lightning event type. Possible Values • ltng:error • ltng:interaction • ltng:pageView • ltng:performance
UI_EVENT_SEQUENCE_NUM	Type Number Description An auto-incremented sequence number of the current event since the session started.
UI_EVENT_SOURCE	Type String Description The user action on the record or records in RECORD_ID. This field's value indicates whether the user's action was on a single record or multiple records. For example, <code>read</code> indicates that one record was read (such as on a record detail page); <code>reads</code> indicates that multiple records were read (such as in a list view). Examples • click • create • delete • hover • read • update

Field	Details
UI_EVENT_TIMESTAMP	Type Number Description The time at which this event occurred, measured in milliseconds. Example 1479769912796
UI_EVENT_TYPE	Type String Description The type of interaction with the records in RECORD_ID. Example crud, system, user, userInteraction
USER_AGENT	Type String Description The numeric code for the type of client used to make the request (for example, the browser, application, or API) as a string.
USER_ID	Type String Description The 15-character ID of the user accessing Salesforce services through the UI or API. Example 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case-insensitive ID of the user who's using Salesforce services through the UI or the API. Example 005900000000I1SNIA0
USER_TYPE	Type String Description The category of user license of the user accessing Salesforce services through the UI or API. Possible Values • A: Automated Process

Field	Details
	• b: High Volume Portal • C: Customer Portal User • D: External Who • F: Self Service • G: Guest • L: Package License Manager • N: Salesforce to Salesforce • n: CSN Only • O: Power Custom • o: Custom • P: Partner • p: Customer Portal Manager • S: Standard • x: Salesforce Administrator

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Lightning Logger Event Type

Lightning Logger events contain information from observed Lightning component logs. This event type is available in the EventLogFile object in API version 58.0 and later.

To enable Lightning Logger events, from Setup, in the Quick Find box, enter *event*, and then select **Event Monitoring Settings**. Turn on Lightning Logger Events.



Note: The browser sends Lightning Logger event logs to the server in batches. Batches are sent when the user interacts with the page and when the page closes or refreshes. If the user experiences connectivity issues or if their login session expires due to browser inactivity, any pending Lightning Logger event logs on the browser are erased. There isn't a way to retrieve these lost logs.

The limit for Lightning Logger events is 30,000 events per minute per organization. Burst capacity may support up to 45,000-50,000 events per minute, but this is not guaranteed. The `MESSAGE` field shows details about what's logged when the limit is hit.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
APP_NAME	Type String

	Description The name of the application the user accessed.
BROWSER_NAME	Type String Description The name of the browser that the user accessed. Example Chrome, IE, Safari, Gecko
BROWSER_VERSION	Type String Description The user's browser version in <code>major.minor</code> format. Some browsers don't provide a minor version.
CLIENT_GEO	Type String Description The geolocation of the client in the form of <code><Country>/<State Province></code> . Example United States/California
CLIENT_ID	Type String Description The API client ID.
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP, such as a login from AppExchange, is shown as "Salesforce.com IP". Example 96.43.144.26
CONNECTION_TYPE	Type String Description The type of connection.

Possible Values

- CDMA1x
- CDMA
- EDGE
- EVDO0
- EVDOA
- EVDOB
- GPRS
- HRPD
- HSDPA
- HSUPA
- LTE
- WIFI

DEVICE_MODEL

Type

String

Description

The name of the device model.

Example

iPad, iPhone

DEVICE_PLATFORM

Type

String

Description

The type of application experience in
name:experience:form format.

Possible Values

Name

- APP_BUILDER
- CUSTOM
- S1
- SFX

Experience

- BROWSER
- HYBRID

Form

- DESKTOP
- PHONE
- TABLET

DEVICE_SESSION_ID

Type

Id

Description

The unique identifier of the user's session based on page load time. When the user reloads a page, a new session is started.

Example

321a1ddfaf924803a075f1e69fc87bc06f53ccd0

EVENT_TYPE

Type

String

Description

The type of event. The value is always `LightningLogger`.

LOGIN_KEY

Type

String

Description

The string that ties together all events in a user's login session. It starts with a login event and ends with either a logout event or the user session expiring.

Example

GeJCsym5eyvtEK2l

MESSAGE

Type

String

Description

The message passed to the `lightning/logger log()` method. The message can be a JSON object or a string. String length is limited to 4 KB (4096 characters).

If you hit the logger limit, subsequent events are muted for a minute. During this time, the message field is replaced with this text: `Rate limiting hit for this organization.` Lightning Logger events resume when the limit resets in the next minute.

ORGANIZATION_ID

Type

String

Description

The 15-character ID of the org.

Example

00D000000000123

OS_NAME

Type

String

	Description The operating system name, derived from the User Agent.
	Example Android, iOS, OSX, Windows
OS_VERSION	Type String
	Description The operating system version, derived from the User Agent.
PAGE_CONTEXT	Type String
	Description The name of the component hosting the main page content.
	Example clients:cardsContainer
PAGE_ENTITY_ID	Type Id
	Description The entity ID (if any) of the record being displayed.
	Example 0013000000I3zJAAAZ
PAGE_ENTITY_TYPE	Type String
	Description The entity type of the page being displayed.
	Example Task, contacts
PAGE_URL	Type String
	Description Relative URL of the top-level Lightning Experience or Salesforce mobile app page that the user opened. The page can contain one or more Lightning components. Multiple record IDs can be associated with PAGE_URL.
	Example /s/Object/0064100000JXITSAA5/view
REQUEST_ID	Type String

	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.
	Example 3nWgxWbDKWWDik0FKfF5DV
SDK_APP_TYPE	Type String Description The mobile SDK application type. Possible Values • HYBRID • HYBRIDLOCAL • HYBRIDREMOTE • NATIVE • REACTNATIVE
SDK_APP_VERSION	Type String Description The mobile SDK application version number. Example 5.0
SDK_VERSION	Type String Description The mobile SDK version number. Example 2.1.0
SEQUENCE	Type Number Description An auto-incremented sequence number of the current event since the session started.
SESSION_KEY	Type String

	Description The user's unique session ID. Use this value to identify all events in Lightning Experience within a session. When the user logs out and logs in again, a new session is started. Example cdd09305cb6babf34059e27f70e47f1b11dec868
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. Example 20130715233322.670
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). Example 2015-07-27T11:32:59.555Z. The timezone is GMT.
UI_EVENT_RELATIVE_TIMESTAMP	Type Number Description Difference in milliseconds between when the message was logged and when the browser tab was opened. Example 29322.23
UI_EVENT_TIMESTAMP	Type Number Description The time at which this event occurred, measured in milliseconds. Example 1479769912796
USER_ID	Type String Description The 15-character ID of the user accessing Salesforce services through the UI or API.

	Example 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case-insensitive ID of the user who's using Salesforce services through the UI or the API. Example 0059000000001SNIA0
USER_TYPE	Type String Description The category of user license of the user accessing Salesforce services through the UI or API. Possible Values • A: Automated Process • b: High Volume Portal • C: Customer Portal User • D: External Who • F: Self-Service • G: Guest • L: Package License Manager • N: Salesforce to Salesforce • n: CSN Only • O: Power Custom • o: Custom • P: Partner • p: Customer Portal Manager • S: Standard • x: Salesforce Administrator

Lightning Page View Event Type

Lightning Page View events represent information about the page on which the event occurred in Lightning Experience and the Salesforce mobile app, such as the page's load time. This event type is available in the EventLogFile object in API version 39.0 and later.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
APP_NAME	Type String Description The name of the application that the user accessed.
BROWSER_NAME	Type String Description The name of the browser that the user accessed. Example Chrome, Safari
BROWSER_VERSION	Type String Description The version of the browser that the user accessed in <code>major.minor version</code> format. Some browsers don't provide a minor version.
CLIENT_GEO	Type String Description The geolocation of the client in the form of <code><Country>/<State Province></code> . Example United States/California
CLIENT_ID	Type String Description The API client ID.
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as <code>Salesforce.com IP</code> . Example 96.43.144.26
CONNECTION_TYPE	Type String

Field	Details
	Description The type of connection. Possible Values • CDMA1x • CDMA • EDGE • EVDO0 • EVDOA • EVDOB • GPRS • HRPD • HSDPA • HSUPA • LTE • WIFI
DEVICE_ID	Type String Description The unique identifier used to identify a device when tracking events. DEVICE_ID is a generated value that's created when the mobile app is initially run after installation.
DEVICE_MODEL	Type String Description The name of the device model. Example iPad, iPhone
DEVICE_PLATFORM	Type String Description The type of application experience in name:experience:form format. Possible Values • name: APP_BUILDER, CUSTOM, S1, SFX • experience: BROWSER, HYBRID • form: DESKTOP, PHONE, TABLET
DEVICE_SESSION_ID	Type Id

Field	Details
	Description The unique identifier of the user's session based on page load time. When the user reloads a page, a new session is started. Example 321a1ddfaf924803a075f1e69fc87bc06f53ccd0
DURATION	Type Number Description If the page completes loading, then DURATION indicates the duration of time in milliseconds between PAGE_START_TIME and when the loading completes. In this case, DURATION corresponds to EFFECTIVE_PAGE_TIME. If the page doesn't complete loading, then DURATION indicates the duration of time in milliseconds between PAGE_START_TIME and when the user navigates to another page.
EFFECTIVE_PAGE_TIME	Type Double Description Indicates how many milliseconds it takes for the page to load before a user can interact with the page. Multiple factors can affect effective page time (EPT), such as network speed, hardware performance, or page complexity.
EFFECTIVE_PAGE_TIME_DEVIATION	Type Boolean Description When a deviation is detected, EFFECTIVE_PAGE_TIME_DEVIATION records true. The default value is false.
EFFECTIVE_PAGE_TIME_DEVIATION_ERROR_TYPE	Type String Description Indicates the origin of an error. This field is populated when EFFECTIVE_PAGE_TIME_DEVIATION_REASON contains the PAGE_HAS_ERROR value. Possible Values - CUSTOM—An error originating from the customer's system or network. - SYSTEM—An error originating in Salesforce.
EFFECTIVE_PAGE_TIME_DEVIATION_REASON	Type String Description The reason for deviation in page loading time.

Field	Details
	Possible Values • <code>PageHasError</code>—An undefined page loading error occurred. • <code>PageNotLoaded</code>—If a customer navigates away from a page while loading processes are in progress, the page doesn't finish loading. • <code>PreviousPageNotLoaded</code>—When navigating to a new page, and the previous page hasn't completed loading, the next page is considered to have a deviation. Incomplete loading processes on a previous page can affect how the next page loads. • <code>InteractionsBeforePageLoaded</code>—A user interacts with a page element before the page is fully loaded. • <code>PageInBackgroundBeforeLoaded</code>—A background loading process runs on a page. Background processes run when a user navigates away from a page to another browser tab. The browser de-prioritizes the page in the background until the user activates the page's tab. Because a user can leave a page in the background for a long time, the page is expected to have a high Effective Page Time (EPT).
EVENT_TYPE	Type String Description The type of event. The value is always <code>LightningPageView</code>.
GRANDPARENT_UI_ELEMENT	Type String Description The grandparent scope of the page element where the event occurred.
LOGIN_KEY	Type String Description The string that ties together all events in a user's login session. It starts with a login event and ends with either a logout event or the user session expiring. Example <code>GeJCsym5eyvtEK2I</code>
ORGANIZATION_ID	Type String Description The 15-character ID of the org. Example <code>00D0000000000123</code>
OS_NAME	Type String

Field	Details
	Description The operating system name, derived from USER_AGENT. Example Android, iOS, OSX, Windows
OS_VERSION	Type String Description The operating system version, derived from USER_AGENT.
PAGE_APP_NAME	Type String Description The internal name of the application that the user accessed from the App Launcher. Example LightningSales
PAGE_CONTEXT	Type String Description The name of the component hosting the main content of the page. Example clients:cardsContainer
PAGE_ENTITY_ID	Type Id Description The ID of the record that the user accessed which triggered the event on the page. Example 00130000000I3zJAAAZ
PAGE_ENTITY_TYPE	Type String Description The entity type of the event. Example Task, contacts
PAGE_FLEXI_PAGE_NAME_OR_ID	Type String

Field	Details
	Description The page name or identifier. Example runtime_sales_seller_home__SellerHome_L
PAGE_FLEXI_PAGE_TYPE	Type String Description The page type. Example HomePage
PAGE_START_TIME	Type Number Description The time when the page starts loading, measured in milliseconds. Example 1471564788642
PAGE_URL	Type String Description Relative URL of the top-level Lightning Experience or Salesforce mobile app page that the user opened. The page can contain one or more Lightning components. Multiple record IDs can be associated with PAGE_URL. Example /sObject/0064100000JXITSAA5/view
PARENT_UI_ELEMENT	Type String Description The parent scope of the page element where the event occurred.
PREVPAGE_APP_NAME	Type String Description The internal name of the previous application that the user accessed from the App Launcher. Example LightningSales
PREVPAGE_CONTEXT	Type String

Field	Details
	Description The context of the previous page where the event occurred. Example <code>clients:cardsContainer</code>
PREVPAGE_ENTITY_ID	Type Id Description The unique previous page entity identifier of the event.
PREVPAGE_ENTITY_TYPE	Type String Description The previous page entity type of the event. Example <code>Task, contacts</code>
PREVPAGE_URL	Type String Description The relative URL of the previous Lightning Experience or Salesforce mobile app page that the user opened. Example <code>/sObject/006410000</code>
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. Example <code>3nWgxWbDKWWDIk0FKfF5DV</code>
SDK_APP_TYPE	Type String Description The mobile SDK application type. Possible Values • HYBRID • HYBRIDLOCAL • HYBRIDREMOTE

Field	Details
	• NATIVE • REACTNATIVE
SDK_APP_VERSION	Type String Description The mobile SDK application version number. Example 5 . 0
SDK_VERSION	Type String Description The mobile SDK version number. Example 2 . 1 . 0
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all events in Lightning Experience within a session. When the user logs out and logs in again, a new session is started. Example cdd09305cb6babf34059e27f70e47f1b11dec868
TARGET_UI_ELEMENT	Type String Description The target page element where the event occurred. Example tabitem-link
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322 . 670.
TIMESTAMP_DERIVED	Type DateTime

Field	Details
	Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. The timezone is GMT.
UI_EVENT_ID	Type String Description Id of the Lightning event type. Possible Values • ltng:error • ltng:interaction • ltng:pageView • ltng:performance
UI_EVENT_SEQUENCE_NUM	Type Number Description An auto-incremented sequence number of the current event since the session started.
UI_EVENT_SOURCE	Type String Description This field is being deprecated and is mostly null, except in mobile app views where it indicates the page type of views where the context is "native."
UI_EVENT_TIMESTAMP	Type Number Description The time at which this event occurred, measured in milliseconds. Example 1479769912796
USER_AGENT	Type String Description The type of client used to make the request (for example, the browser, application, or API) as a string.
USER_ID	Type String

Field	Details
	Description The 15-character ID of the user accessing Salesforce services through the UI or API. Example 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case-insensitive ID of the user who's using Salesforce services through the UI or the API. Example 005900000000I1SNIA0
USER_TYPE	Type String Description The category of user license of the user accessing Salesforce services through the UI or API. Possible Values • A: Automated Process • b: High Volume Portal • C: Customer Portal User • D: External Who • E: Self-Service • G: Guest • I: Package License Manager • N: Salesforce to Salesforce • n: CSN Only • O: Power Custom • o: Custom • P: Partner • p: Customer Portal Manager • S: Standard • X: Salesforce Administrator

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Lightning Performance Event Type

Lightning Performance events track trends in Lightning Experience and Salesforce mobile app performance. This event type is available in the EventLogFile object in API version 39.0 and later.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
APP_NAME	Type String Description The name of the application that the user accessed.
BROWSER_NAME	Type String Description The name of the browser that the user accessed. Example Chrome, Safari
BROWSER_VERSION	Type String Description The version of the browser that the user accessed in <code>major.minor version</code> format. Some browsers don't provide a minor version.
CLIENT_GEO	Type String Description The geolocation of the client in the form of <code><Country>/<State Province></code> . Example United States/California
CLIENT_ID	Type String Description The API client ID.
CLIENT_IP	Type String

Field	Details
	Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
CONNECTION_TYPE	Type String Description The type of connection. Possible Values • CDMA1x • CDMA • EDGE • EVDO0 • EVDOA • EVDOB • GPRS • HRPD • HSDPA • HSUPA • LTE • WIFI
DEVICE_ID	Type String Description The unique identifier used to identify a device when tracking events. DEVICE_ID is a generated value that's created when the mobile app is initially run after installation.
DEVICE_MODEL	Type String Description The name of the device model. Example iPad, iPhone
DEVICE_PLATFORM	Type String Description The type of application experience in name:experience:form format.

Field	Details
	Possible Values • name: APP_BUILDER, CUSTOM, S1, SFX • experience: BROWSER, HYBRID • form: DESKTOP, PHONE, TABLET
DEVICE_SESSION_ID	Type Id Description The unique identifier of the user's session based on page load time. When the user reloads a page, a new session is started. Example 321a1ddfaf924803a075f1e69fc87bc06f53ccd0
DURATION	Type Number Description The duration in milliseconds since the page start time.
EVENT_TYPE	Type String Description The type of event. The value is always <code>LightningPerformance</code> .
LOGIN_KEY	Type String Description The string that ties together all events in a user's login session. It starts with a login event and ends with either a logout event or the user session expiring. Example GeJCsym5eyvtEK2I
ORGANIZATION_ID	Type String Description The 15-character ID of the org. Example 00D000000000123
OS_NAME	Type String

Field	Details
	Description The operating system name, derived from USER_AGENT. Example Android, iOS, OSX, Windows
OS_VERSION	Type String Description The operating system version, derived from USER_AGENT.
PAGE_START_TIME	Type Number Description The time when the page was initially loaded, measured in milliseconds. Example 1471564788642
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. Example 3nWgxWbDKWWDIk0FKfF5DV
SDK_APP_TYPE	Type String Description The mobile SDK application type. Possible Values • HYBRID • HYBRIDLOCAL • HYBRIDREMOTE • NATIVE • REACTNATIVE
SDK_APP_VERSION	Type String Description The mobile SDK application version number.

Field	Details
	Example 5.0
SDK_VERSION	Type String Description The mobile SDK version number. Example 2.1.0
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all events in Lightning Experience within a session. When the user logs out and logs in again, a new session is started. Example cdd09305cb6babf34059e27f70e47f1b11dec868
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. Example 20130715233322.670
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). Example 2015-07-27T11:32:59.555Z. The timezone is GMT.
UI_EVENT_ID	Type String Description Id of the Lightning event type. Possible Values - ltng:error - ltng:interaction

Field	Details
	• <code>ltng:pageView</code> • <code>ltng:performance</code>  Note: Any other value, such as <code>ltng:bootstrap</code>, is for internal usage only.
UI_EVENT_SOURCE	Type String Description The user action on the record or records. This field's value indicates whether the user's action was on a single record or multiple records. For example, <code>read</code> indicates that one record was read (such as on a record detail page); <code>reads</code> indicates that multiple records were read (such as in a list view). Example • <code>click</code> • <code>create</code> • <code>delete</code> • <code>hover</code> • <code>read</code> • <code>update</code>
UI_EVENT_TIMESTAMP	Type Number Description The time at which this event occurred, measured in milliseconds. Example 1479769912796
UI_EVENT_TYPE	Type String Description The type of performance event. Example <code>bootstrap, defs, performance</code>
USER_AGENT	Type String Description The numeric code for the type of client used to make the request (for example, browser, application, or API) as a string.
USER_ID	Type String

Field	Details
	Description The 15-character ID of the user accessing Salesforce services through the UI or API. Example 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case-insensitive ID of the user who's using Salesforce services through the UI or the API. Example 005900000000I1SNIA0
USER_TYPE	Type String Description The category of user license of the user accessing Salesforce services through the UI or API. Possible Values • A: Automated Process • b: High Volume Portal • C: Customer Portal User • D: External Who • E: Self Service • G: Guest • I: Package License Manager • N: Salesforce to Salesforce • n: CSN Only • O: Power Custom • o: Custom • P: Partner • p: Customer Portal Manager • S: Standard • X: Salesforce Administrator

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Login Event Type

Login events contain details about your org’s user login history.

 **Note:** The Login event type is used by EventLogFile (ELF). It isn’t a real-time event. For the LoginEvent real-time event, which is part of Real-Time Event Monitoring (RTEM), see [LoginEvent](#) in the *Platform Events Developer Guide*.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or the [REST API Developer Guide](#).

Fields

Field	Details
API_TYPE	Type String Description The type of API request. Possible values are: • D—Apex Class • E—SOAP Enterprise • M—SOAP Metadata • P—SOAP Partner • S—SOAP Apex • T—SOAP Tooling • f—Feed • l—Live Agent • p—SOAP ClientSync
API_VERSION	Type String Description The version of the API that’s being used. For example: 36.0.
AUTHENTICATION_CONTEXT_CLASS_REFERENCE	Type String Description If provided by a third-party identity provider, the authentication method indicated in the Authentication Context Class Reference (ACR) claim. • SAML providers—Stores the value of the <code>AuthnContextClassRef</code> statement in the SAML response. • OpenID Connect providers—Stores the value of the ACR claim in the ID token

This field is available in API version 66.0 and later.

AUTHENTICATION_METHOD_REFERENCE**Type**

String

Description

If provided by a third-party identity provider, the authentication method indicated in the Authentication Method Reference (AMR) claim.

- SAML providers—Stores the value of any attribute named `AMR` or `authmethodsreferences` in the SAML response.
- OpenID Connect providers—Stores the value of the AMR claim in the ID token.

This field is available in API version 51.0 and later.

AUTHENTICATION_SERVICE_ID**Type**

Id

Description

The 15-character ID for the authentication service used to log in. This field stores IDs for these authentication services.

- SAML single sign-on providers
- Token exchange handlers

Available in API version 60.0 and later.

BROWSER_TYPE**Type**

String

Description

The identifier string returned by the browser used at login.

Example values are:

- `Go-http-client/1.1`
- `Mozilla/5.0 (Macintosh; Intel Mac OS X 10.12; rv%3A50.0) Gecko/20100101 Firefox/50.0`
- `Mozilla/5.0 (Macintosh; Intel Mac OS X 10_11_6) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/51.0.2704.84 Safari/537.36`

CIPHER_SUITE**Type**

String

Description

The TLS cipher suite used for the login. Values are OpenSSL-style cipher suite names, with hyphen delimiters. For

more information, see [OpenSSL Cryptography and SSL/TLS Toolkit](#).

CLIENT_IP

Type

String

Description

The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP".

For example: 96 . 43 . 144 . 26.

COUNTRY_CODE

Type

String

Description

The country code associated with the IP address of the user logging in.

CPU_TIME

Type

Number

Description

The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.

DB_TOTAL_TIME

Type

Number

Description

The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and DB_CPU_TIME. Compare this field to CPU_TIME to determine whether performance issues are occurring in the database layer or in your own code.

EVENT_TYPE

Type

String

Description

The type of event. The value is always Login.

FORWARDED_FOR_IP

Type

String

Description

The value in the X-Forwarded-For header of HTTP requests sent by the client. For logins that use one or more HTTP proxies, the X-Forwarded-For header is sometimes used to store the origin IP and all proxy IPs.

The `FORWARDED_FOR_IP` field stores whatever value the client sends, which might not be an IP address. The maximum length is 256 characters. Longer values are truncated. The `FORWARDED_FOR_IP` field isn't populated for logins completed via OAuth flows or single sign-on (SSO).

Available in API version 61.0 and later.

`HTTP_REFERER`**Type**

String

Description

The referring URI of the page that's receiving the request.

`LOGIN_KEY`**Type**

String

Description

The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.

For example: `GeJCsym5eyvtEK2I`.

`LOGIN_STATUS`**Type**

String

Description

The status of the login attempt. For successful logins, the value is `LOGIN_NO_ERROR`. All other values indicate errors or authentication issues. For details, see [Login Event Type — LOGIN_STATUS Values](#) on page 2306.

`LOGIN_SUB_TYPE`**Type**

picklist

Properties

Nullable, Restricted picklist

Description

The type of login flow used. See the `LoginSubType` field of [LoginHistory](#) in the Object Reference guide for the list of possible values.

Label is **Login Subtype**.

`LOGIN_TYPE`**Type**

String

Description

The type of login used to access the session.

Possible values are:

- 7—AppExchange

- A—Application
- s—Certificate-based login
- k—Chatter Communities External User
- n—Chatter Communities External User Third Party SSO
- x—Cross Tenant Login (for internal use only)
- r—Employee Login to Community
- z—Lightning Login
- 1—Networks Portal API Only
- 6—Remote Access Client
- i—Remote Access 2.0
- I—Other Apex API
- R—Partner Product
- w—Passwordless Login
- 3—Customer Service Portal
- q—Partner Portal Third-Party SSO
- 9—Partner Portal
- 5—SAML Idp Initiated SSO
- m—SAML Chatter Communities External User SSO
- b—SAML Customer Service Portal SSO
- c—SAML Partner Portal SSO
- h—SAML Site SSO
- 8—SAML Sfdc Initiated SSO
- E—SelfService
- j—Third Party SSO

LOGIN_URL

Type
String

Description
The URL of the login page.

ORGANIZATION_ID

Type
Id

Description
The 15-character ID of the organization.
For example: 00D000000000123.

REQUEST_ID

Type
String

	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code> . For example: 3nWgxWbDKWWDIk0FKfF5DV.
<code>REQUEST_STATUS</code>	Type String Description The status of the request for a page view or user interface action. For example: • <code>S</code>—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned. • <code>F</code>—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only. • <code>U</code>—Undefined • <code>A</code>—Authorization Error • <code>R</code>—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page. • <code>N</code>—Not Found. 404 error. This field can have a blank value.
<code>RUN_TIME</code>	Type Number Description The amount of time that the request took in milliseconds.
<code>SESSION_KEY</code>	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For Login Event Type, this field is usually null because the event is captured before a session is created. Example d7DEq/ANa7nNZZVD
<code>SOURCE_IP</code>	Type IP

	Description The IP address of the incoming client request that first reaches Salesforce during a login. For example, 126.7.4.2. For clients that redirect through one or more HTTP proxies, this field stores the IP address of the first proxy to reach Salesforce. To better identify the origin IP for these cases, check the FORWARDED_FOR_IP field instead.
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Time zone is GMT.
TLS_PROTOCOL	Type String Description The TLS protocol used for the login. Example There are 3 possible values. • 1.0 • 1.1 • 1.2
URI	Type String Description The URI of the page that's receiving the request. For example: /home/home.jsp.
URI_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the URI of the page that's receiving the request.

USE_API_TOKEN

Type

String

Description

Login with API Token - T token, or P password.

USER_ID

Type

Id

Description

The 15-character ID of the user who's using Salesforce services through the UI or the API.

For example: 00530000009M943

USER_ID_DERIVED

Type

Id

Description

The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API.

For example: 00590000000I1SNIA0.

USER_NAME

Type

String

Description

The username that's used for login.

USER_TYPE

Type

String

Description

The category of user license.

Possible values are:

- `CsnOnly`—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users.
- `CspLitePortal`—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site.
- `CustomerSuccess`—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal.
- `Guest`—Users whose access is limited so that your customers can view and interact with your site without logging in.

- **PowerCustomerSuccess**—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy.
- **PowerPartner**—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site.
- **SelfService**—Users whose access is limited because they're organization customers and access the application through a self-service portal.
- **Standard**—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

Login Event Type — LOGIN_STATUS Values

When users attempt to log in to your org, the success or failure of their login attempts is tracked in event log file data. Specifically, the LOGIN_STATUS field in the Login event type contains the result of these login attempts. The data in LOGIN_STATUS can help you determine whether your users' login attempts were successful. This field is available in the Login event type in the EventLogFile object in API version 39.0 and later.

SEE ALSO:

[Login Event Type — LOGIN_STATUS Values](#)

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Login Event Type — LOGIN_STATUS Values

When users attempt to log in to your org, the success or failure of their login attempts is tracked in event log file data. Specifically, the LOGIN_STATUS field in the Login event type contains the result of these login attempts. The data in LOGIN_STATUS can help you determine whether your users' login attempts were successful. This field is available in the Login event type in the EventLogFile object in API version 39.0 and later.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

API Error Code	Details (If Available)
LOGIN_CHALLENGE_ISSUED	Failed: Computer activation required
LOGIN_CHALLENGE_PENDING	Failed: Computer activation pending
LOGIN_DATA_DOWNLOAD_ONLY	
LOGIN_END_SESSION_TXN_SECURITY_POLICY	

API Error Code	Details (If Available)
LOGIN_ERROR_API_TOO_OLD	Failed: API Version Removed. The API version specified for login is below the minimum supported value, and has been removed. Update to a newer, supported API version.
LOGIN_ERROR_APPEXCHANGE_DOWN	Unable to process your login request
LOGIN_ERROR_ASYNC_USER_CREATE	
LOGIN_ERROR_AVANTGO_DISABLED	
LOGIN_ERROR_AVANTGO_TRIAL_EXP	
LOGIN_ERROR_CLIENT_NO_ACCESS	
LOGIN_ERROR_CLIENT_REQ_UPDATE	Failed: Client update required
LOGIN_ERROR_CSS_FROZEN	
LOGIN_ERROR_CSS_PW_LOCKOUT	
LOGIN_ERROR_DUPLICATE_USERNAME	
LOGIN_ERROR_EXPORT_RESTRICTED	Restricted country
LOGIN_ERROR_GLOBAL_BLOCK_DOMAIN	Restricted domain
LOGIN_ERROR_HT_DOWN	
LOGIN_ERROR_HTTP_METHOD_INVALID	Failed: Invalid HTTP method
LOGIN_ERROR_INSECURE_LOGIN	Failed: Login over insecure channel
LOGIN_ERROR_INVALID_GATEWAY	Invalid gateway
LOGIN_ERROR_INVALID_ID_FIELD	
LOGIN_ERROR_INVALID_PASSWORD	Invalid password
LOGIN_ERROR_LOGINS_EXCEEDED	Maximum logins exceeded
LOGIN_ERROR_MUST_USE_API_TOKEN	Failed: API security token required
LOGIN_ERROR_MUTUAL_AUTHENTICATION	Mutual authentication failed
LOGIN_ERROR_NETWORK_INACTIVE	Invalid - Experience Cloud site offline
LOGIN_ERROR_NO_HT_ACCESS	
LOGIN_ERROR_NO_NETWORK_ACCESS	No Experience Cloud site access
LOGIN_ERROR_NO_NETWORK_INFO	
LOGIN_ERROR_NO_PORTAL_ACCESS	Invalid profile association
LOGIN_ERROR_NO_SET_COOKIES	
LOGIN_ERROR_OFFLINE_DISABLED	Offline disabled
LOGIN_ERROR_OFFLINE_TRIAL_EXP	Offline trial expired

API Error Code	Details (If Available)
LOGIN_ERROR_ORG_CLOSED	Organization closed
LOGIN_ERROR_ORG_DOMAIN_ONLY	Restricted domain
LOGIN_ERROR_ORG_IN_MAINTENANCE	Organization is in maintenance
LOGIN_ERROR_ORG_INACTIVE	Organization is inactive
LOGIN_ERROR_ORG_IS_DOT_ORG	Organization is a DOT
LOGIN_ERROR_ORG_LOCKOUT	Organization locked
LOGIN_ERROR_ORG_SIGNING_UP	
LOGIN_ERROR_ORG_SUSPENDED	Organization suspended
LOGIN_ERROR_OUTLOOK_DISABLED	Outlook integration disabled
LOGIN_ERROR_PAGE_REQUIRES_LOGIN	
LOGIN_ERROR_PASSWORD_EMPTY	
LOGIN_ERROR_PASSWORD_LOCKOUT	Password lockout
LOGIN_ERROR_PORTAL_INACTIVE	Invalid - Portal disabled
LOGIN_ERROR_RATE_EXCEEDED	Login rate exceeded
LOGIN_ERROR_RESTRICTED_DOMAIN	Restricted IP
LOGIN_ERROR_RESTRICTED_TIME	Restricted time
LOGIN_ERROR_SESSION_TIMEOUT	
LOGIN_ERROR_SSO_PWD_INVALID	Invalid password
LOGIN_ERROR_SSO_SVC_DOWN	Your company's authentication service is down
LOGIN_ERROR_SSO_URL_INVALID	The Single Sign-On Gateway URL is invalid
LOGIN_ERROR_STORE	
LOGIN_ERROR_STORE_DOWN	
LOGIN_ERROR_SWITCH_SFDC_INSTANCE	
LOGIN_ERROR_SWITCH_SFDC_LOGIN	
LOGIN_ERROR_SYNOFFLINE_DISBLD	Failed: Mobile disabled
LOGIN_ERROR_SYSTEM_DOWN	
LOGIN_ERROR_UNKNOWN_ERROR	Login invalid
LOGIN_ERROR_USER_API_ONLY	Failed: API-only user
LOGIN_ERROR_USER_FROZEN	User is frozen
LOGIN_ERROR_USER_INACTIVE	User is inactive

API Error Code	Details (If Available)
LOGIN_ERROR_USER_NON_MOBILE	Failed: Mobile license required
LOGIN_ERROR_USER_STORE_ACCESS	
LOGIN_ERROR_USERNAME_EMPTY	
LOGIN_ERROR_WIRELESS_DISABLED	Wireless disabled
LOGIN_ERROR_WIRELESS_TRIAL_EXP	Wireless trial expired
LOGIN_LIGHTNING_LOGIN	Lightning Login required
LOGIN_NO_ERROR	
LOGIN_OAUTH_API_DISABLED	Failed: OAuth API access disabled
LOGIN_OAUTH_CONSUMER_DELETED	Failed: Consumer Deleted
LOGIN_OAUTH_DS_NOT_EXPECTED	Failed: Activation secret not expected
LOGIN_OAUTH_EXCEED_GET_AT_LMT	Failed: Get Access Token Limit Exceeded
LOGIN_OAUTH_INVALID_CODE_CHALLENGE	Failed: Invalid Code Challenge
LOGIN_OAUTH_INVALID_CODE_VERIFIER	Failed: Invalid Code Verifier
LOGIN_OAUTH_INVALID_DEVICE	Failed: Device Id missing or not registered
LOGIN_OAUTH_INVALID_DS	Failed: Activation secret invalid
LOGIN_OAUTH_INVALID_DSIG	Failed: Signature Invalid
LOGIN_OAUTH_INVALID_IP	Failed: IP Address Not Allowed
LOGIN_OAUTH_INVALID_NONCE	Failed: Invalid Nonce
LOGIN_OAUTH_INVALID_SIG_METHOD	Failed: Invalid Signature Method
LOGIN_OAUTH_INVALID_TIMESTAMP	Failed: Invalid Timestamp
LOGIN_OAUTH_INVALID_TOKEN	Failed: Invalid Token
LOGIN_OAUTH_INVALID_VERIFIER	Failed: Invalid Verifier
LOGIN_OAUTH_INVALID_VERSION	Failed: Version Not Supported
LOGIN_OAUTH_MISSING_DS	Activation secret missing
LOGIN_OAUTH_NO_CALLBACK_URL	Failed: Invalid Callback URL
LOGIN_OAUTH_NO_CONSUMER	Missing Consumer Key Parameter
LOGIN_OAUTH_NO_TOKEN	Missing OAuth Token Parameter
LOGIN_OAUTH_NONCE_REPLAY	Failed: Nonce Replay Detected
LOGIN_OAUTH_PACKAGE_MISSING	Package for this consumer is not installed in your organization
LOGIN_OAUTH_PACKAGE_OLD	Installed package for this consumer is out of date

API Error Code	Details (If Available)
LOGIN_OAUTH_UNEXPECTED_PARAM	Failed: Unexpected parameter
LOGIN_ORG_TRIAL_EXP	Trial Expired
LOGIN_READONLY_CANNOT_VALIDATE	
LOGIN_SAML_INVALID_AUDIENCE	Failed: Audience Invalid
LOGIN_SAML_INVALID_CONFIG	Failed: Configuration Error/Perm Disabled
LOGIN_SAML_INVALID_FORMAT	Failed: Assertion Invalid
LOGIN_SAML_INVALID_IN_RES_TO	Failed: InResponseTo Invalid
LOGIN_SAML_INVALID_ISSUER	Failed: Issuer Mismatched
LOGIN_SAML_INVALID_ORG_ID	Failed: Invalid Organization Id
LOGIN_SAML_INVALID_PORTAL_ID	Failed: Invalid Portal Id
LOGIN_SAML_INVALID_RECIPIENT	Failed: Recipient Mismatched
LOGIN_SAML_INVALID_SESSION_LEVEL	
LOGIN_SAML_INVALID_SIGNATURE	Failed: Signature Invalid
LOGIN_SAML_INVALID_SITE_URL	Failed: Invalid Site URL
LOGIN_SAML_INVALID_STATUS	Failed: Status Invalid
LOGIN_SAML_INVALID_SUB_CONFIRM	Failed: Subject Confirmation Error
LOGIN_SAML_INVALID_TIMESTAMP	Failed: Assertion Expired
LOGIN_SAML_INVALID_USERNAME	Failed: Username Or SSO Id Invalid
LOGIN_SAML_INVALID_VERSION	
LOGIN_SAML_MISMATCH_CERT	Failed: Signature Invalid/Configured Certificate Mismatch
LOGIN_SAML_MISSING_ORG_ID	Failed: Missing Organization Id for Portal login
LOGIN_SAML_MISSING_PORTAL_ID	Failed: Missing Portal Id
LOGIN_SAML_PROVISION_ERROR	Failed: SAML Provision Error
LOGIN_SAML_REPLAY_ATTEMPTED	Failed: Replay Detected
LOGIN_SAML_SITE_INACTIVE	Failed: Specified Site is Inactive
LOGIN_TWOFACOR_REQ	Multi-factor (formerly called two-factor) is required

Usage

Use LOGIN_STATUS to determine whether your users' login attempts were successful. For example, you can determine whether a departed employee attempted to log in successfully or unsuccessfully.

A	B	C	D	E	F	G	H	I	J	K
EVENT_TYPE	CLIENT_IP	URI	SESSION_KEY	LOGIN_KEY	REQUEST_STATUS	USER_NAME	TIMESTAMP_DERIVED	USER_ID_DERIVED	URI_ID_DERIVED	LOGIN_STATUS
Login	1.2.3.4	/my/uri/path/005B0000000GSwO	sidHash_basic	loginHash_basic	requestStatus_common	userName_L	2015-01-01T00:00:00.000	001xx0000000useAAA	005B0000000GSwOIAW	LOGIN_NO_ERROR

SEE ALSO:

[Login Event Type](#)

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Login As Event Type

Login As events contain details about what a Salesforce admin did while logged in as another user.



Note: Login As Event Type is used by EventLogFile (ELF). It isn't a real-time event. For the LoginAsEvent real-time event, which is part of Real-Time Event Monitoring (RTEM), see [LoginAsEvent](#) in the *Platform Events Developer Guide*.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).



Note: Bolster your security posture by receiving alerts and blocking potentially malicious LoginAsEvent activities with a Transaction Security policy.

Fields

Field	Details
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.
CPU_TIME	Type Number Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DELEGATED_USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or API. In this case, the user who's doing the impersonation.

DELEGATED_USER_ID_DERIVED

Type

Id

Description

The 18-character case-insensitive ID of the user who's using Salesforce services through the UI or API. In this case, the user who's doing the impersonation.

DELEGATED_USER_NAME

Type

String

Description

The username of the user who's using Salesforce services through the UI or API. In this case, the user who's doing the impersonation.

EVENT_TYPE

Type

String

Description

The type of event. The value is always `LoginAs`.

LOGIN_KEY

Type

String

Description

The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.

For example: `GeJCsym5eyvtEK2I`.

ORGANIZATION_ID

Type

Id

Description

The 15-character ID of the organization.

For example: `00D000000000123`.

REQUEST_ID

Type

String

Description

The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same `REQUEST_ID`.

For example: `3nWgxWbDKWWDIk0FKfF5DV`.

RUN_TIME

Type

Number

	Description The amount of time that the request took in milliseconds.
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
URI	Type String Description The URI of the page that's receiving the request. For example: /home/home.jsp.
URI_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the URI of the page that's receiving the request.
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943

USER_ID_DERIVED

Type
Id

Description
The 18-character case insensitive ID of the user who’s using Salesforce services through the UI or the API.
For example: 005900000000I1SNIA0.

SEE ALSO:
[EventLogFile Supported Event Types](#)
[EventLogFile](#)

Logout Event Type

Contains details of user sessions ending or being revoked.

 **Note:** Logout Event Type is used by EventLogFile (ELF). It isn’t a real-time event. For the LogoutEvent real-time event, which is part of Real-Time Event Monitoring (RTEM), see [LogoutEvent](#) in the *Platform Events Developer Guide*.

These scenarios count as logout events.

- Logging out via the UI
- Session expiration
- Revoking access for a connected app
- Calling the Salesforce revocation endpoint
- Salesforce disabling a connected app
-  **Note:** For batch operations where multiple sessions are revoked at once, Salesforce records only one logout event. You can tell that it’s a batch operation because there’s no user ID.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer’s Guide](#).

Fields

Field	Details
API_TYPE	Type String Description The type of API request. Possible values are: • D—Apex Class • E—SOAP Enterprise • M—SOAP Metadata • P—SOAP Partner • S—SOAP Apex

- T—SOAP Tooling
- f—Feed
- l—Live Agent
- p—SOAP ClientSync

API_VERSION

Type

String

Description

The version of the API that's being used.

For example: 36.0.

APP_TYPE

Type

Number

Description

The application type that was in use upon logging out.

Example Values

- 1000: Application
- 1007: SFDC Application
- 1014: Chat
- 2501: CTI
- 2514: OAuth
- 3475: SFDC Partner Portal

BROWSER_TYPE

Type

String

Description

The identifier string returned by the browser used at login.

Example values are:

- Go-http-client/1.1
- Mozilla/5.0 (Macintosh; Intel Mac OS X 10.12; rv%3A50.0) Gecko/20100101 Firefox/50.0
- Mozilla/5.0 (Macintosh; Intel Mac OS X 10_11_6) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/51.0.2704.84 Safari/537.36

CLIENT_IP

Type

String

	Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.
CLIENT_VERSION	Type Number Description The version of the client that was in use upon logging out.
EVENT_TYPE	Type String Description The type of event. The value is always Logout.
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: 00D0000000000123.
PLATFORM_TYPE	Type Number Description The code for the client platform. If a timeout caused the logout, this field is null. Example Values • 1000: Windows • 1008: Windows 2003 • 1013: Windows 8.1 • 1015: Windows 10 • 2003: Macintosh/Apple OSX • 4000: Linux

- 5005: Android
- 5006: iPhone
- 5007: iPad
- 5200: Android 10.0

REQUEST_ID

Type

String

Description

The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.

For example: 3nWgxWbDKWWDIk0FKfF5DV.

RESOLUTION_TYPE

Type

Number

Description

The screen resolution of the client. If a timeout caused the logout, this field is null.

SESSION_KEY

Type

String

Description

The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.

For example: d7DEq/ANa7nNZZVD.

SESSION_LEVEL

Type

String

Description

The security level of the session that was used when logging out.

Possible Values

- 1: Standard Session
- 10: High-Assurance Session

SESSION_TYPE

Type

String

Description

The session type that was used when logging out.

Possible Values

- A: API

- I: APIOnlyUser
- N: ChatterNetworks
- Z: ChatterNetworksAPIOnly
- C: Content
- P: OAuthApprovalUI
- O: OAuth2
- T: SiteStudio
- R: SitePreview
- S: SubstituteUser
- B: TempContentExchange
- G: TempOAuthAccessTokenFrontdoor
- Y: TempVisualforceExchange
- F: TempUIFrontdoor
- U: UI
- E: UserSite
- V: Visualforce
- W: WDC_API

Timestamp**Type**

String

Description

The access time of Salesforce services in GMT.

For example: 20130715233322.670.

When a customer logs out by using the **Logout** button, the **Timestamp** field records the actual logout time. However, when a customer is logged out automatically, Salesforce detects the event by using a process that runs every 15 minutes. **Timestamp** values can reflect a logout time up to 15 minutes later than the actual automatic logout time.

Timestamp_Derived**Type**

DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

User_ID**Type**Id

	Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API. For example: 00590000000I1SNIA0.
USER_INITIATED_LOGOUT	Type Boolean Description The value is 1 if the user intentionally logged out of the organization by clicking the Logout button. If the user's session timed out due to inactivity or another implicit logout action, the value is 0.
USER_TYPE	Type String Description The category of user license of the user that logged out. Possible Values • A: Automated Process • b: High Volume Portal • C: Customer Portal User • D: External Who • E: Self-Service • G: Guest • L: Package License Manager • N: Salesforce to Salesforce • n: CSN Only • O: Power Custom • o: Custom • P: Partner • p: Customer Portal Manager • S: Standard

- x: Salesforce Administrator

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Metadata API Operation Event Type

Metadata API Operation events contain details of Metadata API retrieval and deployment requests.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
API_VERSION	Type String Description The version of the API that's being used. For example: 36.0.
CLIENT_ID	Type String Description The API client ID.
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
CPU_TIME	Type Number Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
EVENT_TYPE	Type String

	Description The type of event. The value is always <code>MetadataApiOperation</code> .
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: <code>GeJCsym5eyvtEK2I</code> .
OPERATION	Type String Description The operation that's being performed. Possible Values • <code>meta_deploy</code> • <code>meta_list</code> • <code>meta_retrieve</code> • <code>meta_synchronous_create</code> • <code>meta_synchronous_read</code> • <code>meta_synchronous_upsert</code>
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: <code>00D000000000123</code> .
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code> . For example: <code>3nWgxWbDKWWDIk0FKfF5DV</code> .
RUN_TIME	Type Number Description The amount of time that the request took in milliseconds.

SESSION_KEY

Type

String

Description

The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.

For example: d7DEq/ANa7nNZZVD.

TIMESTAMP

Type

String

Description

The access time of Salesforce services in GMT.

For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type

DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

URI

Type

String

Description

The URI of the page that's receiving the request.

For example: /home/home.jsp.

URI_ID_DERIVED

Type

ID

Description

The 18-character case insensitive ID of the URI of the page that's receiving the request.

USER_ID

Type

Id

Description

The 15-character ID of the user who's using Salesforce services through the UI or the API.

For example: 00530000009M943

USER_ID_DERIVED

Type

Id

Description

The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API.

For example: 005900000000I1SNIA0.

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Multiblock Report Event Type

Multiblock Report events contain details about Joined Report reports.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
CPU_TIME	Type Number Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DB_TOTAL_TIME	Type Number Description The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and DB_CPU_TIME. Compare this field to CPU_TIME to determine whether performance issues are occurring in the database layer or in your own code.

EVENT_TYPE

Type

String

Description

The type of event. The value is always `MultiblockReport`.

HAS_CHART

Type

Boolean

Description

True if the report has a chart.

LOGIN_KEY

Type

String

Description

The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.

For example: `GeJCsym5eyvtEK2I`.

MASTER_REPORT_ID

Type

String

Description

The 15-character ID of the master report.

ORGANIZATION_ID

Type

Id

Description

The 15-character ID of the organization.

For example: `00D000000000123`.

REQUEST_ID

Type

String

Description

The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same `REQUEST_ID`.

For example: `3nWgxWbDKWWDIk0FKfF5DV`.

REQUEST_STATUS

Type

String

Description

The status of the request for a page view or user interface action.

For example:

- **S**—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned.
- **F**—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only.
- **U**—Undefined
- **A**—Authorization Error
- **R**—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page.
- **N**—Not Found. 404 error.

This field can have a blank value.

RUN_TIME

Type

Number

Description

The amount of time that the request took in milliseconds.

SESSION_KEY

Type

String

Description

The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.

For example: d7DEq/ANa7nNZZVD.

TIMESTAMP

Type

String

Description

The access time of Salesforce services in GMT.

For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type

DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

URI

Type

String

	Description The URI of the page that's receiving the request. For example: /home/home.jsp.
URI_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the URI of the page that's receiving the request.
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API. For example: 00590000000I1SNIA0.
USER_TYPE	Type String Description The category of user license. Possible values are: • CsnOnly—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users. • CspLitePortal—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site. • CustomerSuccess—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. • Guest—Users whose access is limited so that your customers can view and interact with your site without logging in.

- `PowerCustomerSuccess`—Power Customer Success license. Users whose access is limited because they’re organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy.
- `PowerPartner`—Power Partner license. Users whose access is limited because they’re partners and typically access the application through a partner portal or site.
- `SelfService`—Users whose access is limited because they’re organization customers and access the application through a self-service portal.
- `Standard`—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

SEE ALSO:
[EventLogFile Supported Event Types](#)
[EventLogFile](#)

Named Credential Event Type

The Named Credential event type captures information about Apex callouts that use named credentials as their endpoints. Use this event type to audit the installed managed packages that use named credentials. If you don’t recognize the package namespace in the named credential event log file, then you can investigate whether a security breach has occurred. This event type is available in the EventLogFile object in API version 53.0 and later.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer’s Guide](#).

Fields

Field	Details
<code>BOT_IDENTIFIER</code>	Type String Description The ID of the bot.
<code>BOT_SESSION_IDENTIFIER</code>	Type String Description The bot session ID.

Field	Details
CALLER_PACKAGE_NAMESPACE	Type String Description If an Apex callout using a Named Credential endpoint is initiated from a package, then this field contains the package's namespace. If the callout isn't initiated from a package, then this field is empty. Example Acme
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
CPU_TIME	Type Number Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
EVENT_TYPE	Type String Description The type of event. The value is always <code>NamedCredential</code>.
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
NAMED_CREDENTIAL_NAME	Type String Description The name of the named credential that's the endpoint of the Apex callout. Example My_Named_Credential

Field	Details
ORGANIZATION_ID	Type ID Description The 15-character ID of the org. Example 00D0000000000123
PLANNER_IDENTIFIER	Type String Description The ID of the agent planner.
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. For example: 3nWgxWbDKWWDIk0FKfF5DV.
RUN_TIME	Type Number Description The amount of time that the request took in milliseconds.
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime

Field	Details
	Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
URI	Type String Description The URI of the page that's receiving the request. For example: /home/home.jsp.
URI_ID_DERIVED	Type ID Description The 18-character case-safe ID of the URI of the page that's receiving the request.
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case-safe ID of the user who's using Salesforce services through the UI or the API. For example: 00590000000I1SNIA0.

SEE ALSO:

[Salesforce Help: Named Credentials](#)

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

One Commerce Usage Event Type

One Commerce Usage events capture information about your Commerce instance. This event type is available in the EventLogFile object in API version 51.0 and later.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
BROWSER_DEVICE_TYPE	Type Number Description A code used to identify the browser and device type. The code is in the format "BBVVXYZ," with the following signification: • BB — Two digits that indicate the browser type. — IE: "10" — CHROME: "13" — FIREFOX: "11" — SAFARI: "14" — OPERA: "15" — ANDROID_WEBKIT: "16" — NETSCAPE: "17" — OTHER_WEBKIT: "18" — OTHER_GECKO: "19" — OTHER_KHTML: "20" — OTHER_MOBILE: "21" — SALESFORCE_DESKTOP: "22" — BLACKBERRY: "23" — GOOD_ACCESS: "24" — EDGE: "25" — SALESFORCE_MOBILE: "26" • VV—Three digits that indicate version, leading zeroes. • XYZ—Browser-type specific flags or options. Each digit in XYZ represents a different flag depending on the BrowserType: — X=1: If the parser recognizes a "touch" browser. Here, touch means the older touch native client, not that the device supports touch. — Y=1: If the parser recognizes a browser in compatibility mode. Only for IE. — Z=1: If the browser is recognized as <code>MOBILE</code>. — Z=2: If the browser is recognized as <code>PHONE</code>. — Z=3: If the browser is recognized as <code>TABLET</code>. — Z=4: If the browser is a recognized as <code>MEDIA PLAYER</code>.

Field	Details
	— Z=6: Only for Opera Mini.
B2B_EDITION	Type String Description Edition of B2B Commerce. Edition can include Lightning (LB2B), CCRZ, or future flavors.
B2B_VERSION	Type String Description This field is optional. For the managed package, then B2B_VERSION includes Major, Minor, Patch revision numbers. For Lightning B2B_VERSION includes the optional service version.
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". If the user's session context isn't available, this field returns a blank value.
CONTEXT_ID	Type String Description The contextId (Key Business Domain Value) in which the operation is done. For example, for Cart, the contextId is cartId.
CONTEXT_MAP	Type String Description This field is optional. It holds a JSON string with additional operational context.
CORRELATION_ID	Type String Description This field holds correlations, such as client to server and other asynchronous calls to B2B subsystems.

Field	Details
COUNT	Type String Description The number of records impacted by this operation.
CPU_TIME	Type Number Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DB_TOTAL_TIME	Type Number Description Time (in milliseconds) spent waiting for database processing in aggregate for all operations in the request. Compare this field to CPU_TIME to determine whether performance issues are occurring in the database layer or in your own code.
EFFECTIVE_ACCOUNT_ID	Type String Description The B2B Effective Account ID in context of the operation.
ERROR_CODE	Type String Description The API error code that appears when an operation fails. If there is no error the value is <code>null</code> .
ERROR_MESSAGE	Type String Description Error message that appears when an operation fails. If there is no error the value is <code>null</code> .
EVENT_TYPE	Type String Description The type of event. The value is always <code>OneCommerceUsage</code> .

Field	Details
IS_RETRY	Type String Description The field is <code>True</code> if the operation resulted in a retry, otherwise it's <code>False</code>. Understanding the frequency of operation retries helps determine the health of a service. The default value is <code>False</code>.
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: <code>GeJCsym5eyvtEK2I</code>.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: <code>00D000000000123</code>.
OPERATION	Type String Description The name of the B2B service. For example: <code>CreateCart</code> or <code>KeywordSearch</code>.
OPERATION_STAGE	Type String Description This field is optional. Used to capture more granular operation level stages.
OPERATION_STATE	Type String Description This field is optional. An enum for the state of the operation. For example: <code>CartLocked</code>, <code>OrderCancelled</code>, <code>InProgress</code>, <code>New</code>, <code>Update</code>, and <code>Pending</code>.

Field	Details
OPERATION_STATUS	Type String Description Enum with the outcome of the operation. For example: <code>Success</code> or <code>Fail</code>.
OPERATION_TIME	Type String Description Total time of the operation in milliseconds.
OS_VERSION	Type String Description Code used to identify the operating system and version. The value is equal to 9999 for an unknown platform.
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code>. For example: <code>3nWgxWbDKWWDIk0FKfF5DV</code>.
REQUEST_STATUS	Type String Description The status of the request for a page view or user interface action. For example: • <code>S</code>—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned. • <code>F</code>—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only. • <code>U</code>—Undefined • <code>A</code>—Authorization Error • <code>R</code>—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page.

Field	Details
	• N—Not Found. 404 error. This field can have a blank value.
RUN_TIME	Type Number Description The amount of time that the request took in milliseconds. Requests with a value over five seconds are considered long-running requests for the purposes of the Concurrent Long-Running Apex Limit.  Note: HTTP callout processing time isn't included when calculating the 5-second limit. We pause the timer for the callout and resume it when the callout completes.
SERVICE_NAME	Type String Description Enum of B2B Services. For example: Cart, Pricing, Products, Order, Search, and so on.
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

Field	Details
	For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
URI	Type String Description The URI of the page that's receiving the request. For example: /home/home.jsp.
URI_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the URI of the page that's receiving the request.
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API. For example: 00590000000I1SNIA0.
USER_TYPE	Type String Description The category of user license. Possible values are: • <code>CsnOnly</code>—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users. • <code>CspLitePortal</code>—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site.

Field	Details
	• CustomerSuccess—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. • Guest—Users whose access is limited so that your customers can view and interact with your site without logging in. • PowerCustomerSuccess—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy. • PowerPartner—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site. • SelfService—Users whose access is limited because they're organization customers and access the application through a self-service portal. • Standard—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.
WEBSTORE_ID	Type String Description This field is optional. The ID of the webstore associated with the store (site).
WEBSTORE_TYPE	Type String Description The type of webstore. For example: B2B, B2C, and OMS.

SEE ALSO:

[EventLogFile Supported Event Types](#)
[EventLogFile](#)

Package Install Event Type

Package Install events contain details about package installation in the organization.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.
CPU_TIME	Type Number Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
EVENT_TYPE	Type String Description The type of event. The value is always <code>PackageInstall</code>.
FAILURE_TYPE	Type String Description A general categorization of any error that's encountered.
IS_MANAGED	Type Boolean Description True if the operation is performed on a managed package.
IS_PUSH	Type Boolean Description True if the package was installed as a result of a push upgrade.
IS_RELEASED	Type Boolean

	Description True if the operation is performed on a released package.
IS_SUCCESSFUL	Type Boolean Description True if the package was successfully installed.
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
OPERATION_TYPE	Type String Description The type of package operation. Possible Values • INSTALL • UPGRADE • EXPORT • UNINSTALL • VALIDATE_PACKAGE • INIT_EXPORT_PKG_CONTROLLER
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: 00D000000000123.
PACKAGE_NAME	Type String Description The name of the package that's being installed.
REQUEST_ID	Type String

	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code> . For example: 3nWgxWbDKWWDIk0FKfF5DV.
RUN_TIME	Type Number Description The amount of time that the request took in milliseconds.
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
URI	Type String Description The URI of the page that's receiving the request. For example: /home/home.jsp.
URI_ID_DERIVED	Type ID

	Description The 18-character case insensitive ID of the URI of the page that's receiving the request.
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API. For example: 00590000000I1SNIA0.

SEE ALSO:

[EventLogFile Supported Event Types](#)[EventLogFile](#)

Permission Update Event Type

Permission update events represent changes to object, field, and user permissions and setup entity access that occur in profiles and permission sets. The event type also tracks if you clone profiles or change whether session activation is required in permission sets or permission set groups.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).



Note: This event type tracks if Salesforce updates object or field permissions in standard profiles, in addition to changes you make to your custom profiles, permission sets, and permission set groups.

Fields

Field	Details
CONTEXT	Type String Description Reserved for future use.
DESCRIPTION	Type String

Field	Details
	Description A description of the update that occurred in the profile, permission set, or permission set group. Example UserPerm: ConvertLeads disabled
EVENT_TYPE	Type String Description The type of event. The value is always <code>PermissionUpdate</code>.
FEATURE_ID	Type Id Description The ID of the feature, such as a profile, permission set, or permission set group, that was updated.
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. Example GeJCsym5eyvtEK2I
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. Example 00DXXXXXXXXXXXXX
PERMISSION_TYPE	Type String Description The type of permission, such as user, object, or field, or setup entity access, such as tab settings or Apex class access, that was updated. Example EntityObject
REQUEST_ID	Type String

Field	Details
	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code>. Example 3nWgxWbDKWWDIk0FKfF5DV
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. Example d7DEq/ANa7nNZZVD
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. Example 20130715233322.670
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). Example 2015-07-27T11:32:59.555Z
UPDATE_TYPE	Type String Description For object permissions, user permissions, and setup entity access, the type of update that occurred. For example, a permission was updated or deleted. For other changes in profiles, permission sets, or permission set groups, this information is tracked in the <code>DESCRIPTION</code> field. Example delete
USER_ID	Type Id

Field	Details
	Description The 15-character ID of the user who made the permission update.
	Example 005XXXXXXXXXXXXXX

Platform Encryption Event Type

Platform Encryption event contains information about tenant secret and derived encryption key usage. This event type is available in API versions 41.0 and later.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
ACTION	Type String
	Description The name and type of the event.
	Possible Values • TS Imported: A tenant secret generated by the Shield Key Management Service (KMS), or customer-supplied key material, imported by a customer. • TS Generated: A tenant secret generated by the Shield Key Management Service (KMS). • Key Derived: An encryption key derived from a tenant secret for encryption or decryption. • TS Wrapped: A tenant secret generated by the Shield Key Management Service (KMS), or customer-supplied key material, encrypted for storage. • Key Delivered: A data encryption key delivered for encryption or decryption. • TS Stored: A tenant secret generated by the Shield Key Management Service (KMS), or customer-supplied key material, stored encrypted in the database. • TS Read: An encrypted tenant secret generated by the Shield Key Management Service (KMS), or encrypted customer-supplied key material, that is loaded for encryption or decryption. • TS Unwrapped: An encrypted tenant secret generated by the Shield Key Management Service (KMS), or encrypted

	customer-supplied key material, unwrapped for use by the KMS. • TS Exported: An encrypted tenant secret exported by a customer. • TS Destroyed: A tenant secret and related data encryption key destroyed by a customer.
BOT_IDENTIFIER	Type String Description The ID of the bot.
BOT_SESSION_IDENTIFIER	Type String Description The bot session ID.
CLIENT_IP	Type String Description The IP address of the client that is using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.
CPU_TIME	Type Number Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
EVENT_TYPE	Type String Description The type of event. The value is always PlatformEncryption.
KEY_ID	Type String Description The 15-character ID of the tenant secret. Example 02GD000000096Cb

KEY_ID_DERIVED

Type

String

Description

The 18-character ID of the derived encryption key.

Example

02GD000000096CbMAI

KEY_TYPE

Type

String

Description

The type of tenant secret.

Possible Values

- Data
- DeterministicData
- Analytics
- OAuthSecret (internal use only)
- SearchIndex

LOGIN_KEY

Type

String

Description

The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.

For example: GeJCsym5eyvtEK2I.

METHOD

Type

String

Description

The string that identifies a change in tenant secret Active state.

For example, tenant secrets become active when they're created, and are made inactive when they're exported.

Examples

- TS Exported: User ID
- TS Generated: HSM or BYOK
- TS Unwrapped: Tenant Secret or BYOK

ORGANIZATION_ID

Type

ID

Description

The 15-character ID of the organization.

For example: 00D000000000123.

PLANNER_IDENTIFIER

Type

String

Description

The ID of the agent planner.

REQUEST_ID

Type

String

Description

The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.

For example: 3nWgxWbDKWWDIk0FKfF5DV.

RUN_TIME

Type

Number

Description

The amount of time that the request took in milliseconds.

SESSION_KEY

Type

String

Description

The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.

For example: d7DEq/ANa7nNZZVD.

TIMESTAMP

Type

String

Description

The access time of Salesforce services in GMT.

For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type

DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

URI

Type

String

	Description The URI of the page that's receiving the request. For example: /home/home.jsp.
URI_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the URI of the page that's receiving the request.
USER_ID	Type ID Description The 18-character case insensitive ID of the user who is using Salesforce services through the UI or the API. For example: 00590000000I1SNIA0.
USER_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the user who is using Salesforce services through the UI or the API. For example: 00590000000I1SNIA0.

SEE ALSO:[EventLogFile Supported Event Types](#)[EventLogFile](#)

Pricing Event Type

Pricing events contain information about pricing procedures that were executed, including details such as pricing procedures used, the pricing APIs, and pricing details and status.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
CLIENT_IP	Type String

	Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". If the user's session context isn't available, this field returns a blank value.
CPU_TIME	Type Number Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
EVENT_TYPE	Type String Description The type of event. The value is always <code>Pricing</code> .
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: 00D0000000000062.
PRICING_API_ENDPOINT	Type String Description The starting point of the Pricing API or Headless Pricing API. For example: <code>Pricing API</code> .
PRICING_DETAILS	Type String Description The details of the pricing event that describes if the pricing API was executed or failed. For example: <code>Pricing element was processed..</code>

PRICING_ERROR_CODE

Type

String

Description

The API error code that appears when pricing execution fails.
If there is no error, the value is null.

For example: `INTERNAL_ERROR`.

PRICING_LOG_NAME

Type

String

Description

The detailed pricing log message generated.

For example: `The Headless Pricing API was run in:{0}`.

PRICING_PROCEDURE

Type

String

Description

The name of the pricing procedure used to perform pricing calculations.

For example: `Default Pricing Procedure`.

PRICING_STATUS

Type

String

Description

The status of the request for pricing execution.

For example: `Completed` or `Failed`.

REQUEST_ID

Type

String

Description

The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same `REQUEST_ID`.

RUN_TIME

Type

Number

Description

The amount of time that the request took in milliseconds.

For example: `1851629863`.

SESSION_KEY

Type

String

	Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.
TIMESTAMP	Type String Description The time that the pricing was executed in GMT. For example: 20170606170000.000.
TIMESTAMP_DERIVED	Type DateTime Description The time that the pricing was executed in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2017-06-06T1700.000Z. Timezone is GMT.
URI	Type String Description The URI of the page that's receiving the request. For example: /home/home.jsp.
URI_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the URI of the page that's receiving the request.
USER_ID	Type Id Description The 15-character ID of the user who executed pricing through the UI or the API. For example: 005SG000000eu6j
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API.

For example: 001xx0000000useAAA.

Queued Execution Event Type

Queued Execution events contain details about queued executions—for example, batch Apex.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
CPU_TIME	Type Number Description The CPU time in milliseconds that it took to complete the batch apex request. This field indicates the amount of activity taking place in the app server layer, allowing you to identify pieces of Apex or Visualforce code that need refactoring.
DB_TOTAL_TIME	Type Number Description The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and DB_CPU_TIME. Compare this field to CPU_TIME to determine whether performance issues are occurring in the database layer or in your own code.
ENTRY_POINT	Type String Description The name of the Apex class that serves as the execution point for the batch job.  Note: This field contains data only for Batch Apex. It is unpopulated for Future and Queueable processes.

Field	Details
	Example TaskPhoneExtensionBatchUpdate
EVENT_TYPE	Type String Description The type of event. The value is always <code>QueuedExecution</code> .
JOB_ID	Type String Description The ID of the batch Apex job. Example 7073000000IDquo
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: <code>GeJCsym5eyvtEK2I</code> .
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: <code>00D0000000000123</code> .
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code> . For example: <code>3nWgxWbDKWWDIk0FKfF5DV</code> .
REQUEST_STATUS	Type String Description The status of the request for a page view or user interface action.

Field	Details
	For example: • S—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned. • F—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only. • U—Undefined • A—Authorization Error • R—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page. • N—Not Found. 404 error. This field can have a blank value.
RUN_TIME	Type Number Description The amount of time that the request took in milliseconds.
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

Field	Details
URI	Type String Description The URI of the page that's receiving the request. For example: /home/home.jsp.
URI_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the URI of the page that's receiving the request.
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API. For example: 00590000000I1SNIA0.
USER_TYPE	Type String Description The category of user license. Possible values are: • <code>CsnOnly</code>—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users. • <code>CspLitePortal</code>—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site. • <code>CustomerSuccess</code>—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal.

Field	Details
	• Guest—Users whose access is limited so that your customers can view and interact with your site without logging in. • PowerCustomerSuccess—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy. • PowerPartner—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site. • SelfService—Users whose access is limited because they're organization customers and access the application through a self-service portal. • Standard—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

SEE ALSO:

[EventLogFile Supported Event Types](#)[EventLogFile](#)

Report Event Type

Report events contain information about what happened when a user ran a report. This event type includes all activity that's in the Report Export event type, plus more. For example, it has user activity for reports exported as both Formatted Report and Details Only output.



Note: Exporting a report directly from the report result captures the event in both the Report and Report Export logs.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
AVERAGE_ROW_SIZE	Type Number Description The average row size of all rows in the Report event, in bytes. A large average size, coupled with a high ROW_COUNT, can indicate that a user is downloading information for fraudulent

purposes. For example, a salesperson who downloads all sales leads before departing for a competitor.

Example

700

CLIENT_IP

Type

String

Description

The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP".

For example: 96 . 43 . 144 . 26.

CPU_TIME

Type

Number

Description

The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.

DB_BLOCKS

Type

Number

Description

Indicates how much activity is occurring in the database. A high value for this field suggests that adding indexes or filters on your queries would benefit performance.

DB_CPU_TIME

Type

Number

Description

The CPU time in milliseconds to complete the request. Indicates the amount of activity taking place in the database layer during the request.

DB_TOTAL_TIME

Type

Number

Description

The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and DB_CPU_TIME. Compare this field to CPU_TIME to determine whether performance issues are occurring in the database layer or in your own code.

DISPLAY_TYPE

Type

String

	Description The report display type, indicating the run mode of the report. Possible values are: • D—Dashboard • S—Show Details • H—Hide Details
ENTITY_NAME	Type String Description The name of the object affected by the trigger.
EVENT_TYPE	Type String Description The type of event. The value is always Report.
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCSym5eyvtEK2I.
NUMBER_BUCKETS	Type Number Description The number of buckets that were used in the report.
NUMBER_COLUMNS	Type Number Description The number of columns in the report.
NUMBER_EXCEPTION_FILTERS	Type Number Description The number of exception filters that are used in the report.
ORGANIZATION_ID	Type Id

Description

The 15-character ID of the organization.

For example: 00D000000000123.

ORIGIN

Type

String

Description

The context in which the report executed, such as from a UI (Classic, Lightning, Mobile), through an API (synchronous, asynchronous, Apex), or through a dashboard.

Possible Values

- **ReportOpenedFromMobileDashboard:** Report executed when a user clicked a dashboard component on a mobile device and drilled down to a report.
 - **DashboardComponentUpdated:** Report executed when a user refreshed a dashboard component.
 - **DashboardComponentPreviewed:** Report executed from a Lightning dashboard component preview.
 - **ReportRunUsingSynchronousApi:** Report executed from a synchronous API.
 - **ReportRunUsingAsynchronousApi:** Report executed from an asynchronous API.
 - **ReportRunUsingApexSynchronousApi:** Report executed from the synchronous Apex API.
 - **ReportRunUsingApexAsynchronousApi:** Report executed from the asynchronous Apex API.
 - **ReportExported:** Report executed from a printable view or report export that was not asynchronous nor an API export.
 - **ReportRunFromClassic:** Report executed from the Run Report option of Salesforce Classic.
 - **ReportRunFromMobile:** Report executed from the Run Report option of the mobile Salesforce app.
 - **ReportRunFromLightning:** Report executed from the Run option in Lightning Experience from a non-mobile browser.
 - **ReportRunFromRestApi:** Report executed from REST API.
 - **ReportPreviewed:** Report executed when a user got preview results while using the report builder.
 - **ReportScheduled:** Report was scheduled.
 - **ProbeQuery:** Report executed from a probe query.
-

- **ReportRunFromReportingSnapshot:** Report executed through Snapshot Analytics.
- **ReportExportedAsynchronously:** Report was exported asynchronously.
- **ReportExportedUsingExcelConnector:** Report was exported using the Excel connector.
- **ChartRenderedOnVisualforcePage:** Report executed from a rendered chart on a VisualForce Page.
- **ChartRenderedInEmbeddedAnalyticsApp:** Report executed from a rendered chart in an embedded Analytics app.
- **ReportRunAndNotificationSent:** Report executed through the notifications API.
- **ChartRenderedOnHomePage:** Report executed from a rendered chart on the home page.
- **ReportResultsAddedToWaveTrending:** Report executed when a user trended a report in CRM Analytics.
- **ReportAddedToCampaign:** Report was added from an Add to Campaign action.
- **ReportResultsAddedToEinsteinDiscovery:** Report executed synchronously from Einstein Discovery.
- **Unknown:** Report execution origin is unknown.
- **Test:** Report execution resulted from a test.

RENDERING_TYPE
Type

String

Description

Describes the format of the report output in Salesforce Classic. If the report was exported in Lightning Experience, this field is blank.

Possible Values

- **W:** Web (HTML)
- **E:** Email
- **P:** Printable
- **X:** Excel
- **C:** Comma-separated values (CSV)
- **J:** JavaScript Object Notation (JSON)
- **D:** Dummy data

REPORT_ID
Type

Id

Description

The 15-character ID of the report that was run.

REPORT_ID_DERIVED

Type

Id

Description

The 18-character case insensitive ID of the report that was run.

REQUEST_ID

Type

String

Description

The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.

For example: 3nWgxWbDKWWDIk0FKfF5DV.

REQUEST_STATUS

Type

String

Description

The status of the request for a page view or user interface action.

For example:

- S—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned.
- F—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only.
- U—Undefined
- A—Authorization Error
- R—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page.
- N—Not Found. 404 error.

This field can have a blank value.

ROW_COUNT

Type

Number

Description

The number of rows that were processed in the Report event. High row counts, coupled with a high AVERAGE_ROW_SIZE, can indicate that a user is downloading information for fraudulent purposes. For example, a salesperson who downloads all sales leads before departing for a competitor.

Example

150

RUN_TIME

Type

Number

Description

The amount of time that the request took in milliseconds.

SESSION_KEY

Type

String

Description

The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.

For example: d7DEq/ANa7nNZZVD.

SORT

Type

String

Description

The sort column and order that was used in the report.

TIMESTAMP

Type

String

Description

The access time of Salesforce services in GMT.

For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type

DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

UI_NUMBER_COLUMNS

Type

Number

Description

The number of columns in the report. The fields that have multiple components (for example, addresses) are considered as a single column.

URI

Type

String

Description

The URI of the page that's receiving the request.

For example: /home/home.jsp.

URI_ID_DERIVED

Type

ID

Description

The 18-character case insensitive ID of the URI of the page that's receiving the request.

USER_ID

Type

Id

Description

The 15-character ID of the user who's using Salesforce services through the UI or the API.

For example: 00530000009M943

USER_ID_DERIVED

Type

Id

Description

The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API.

For example: 00590000000I1SNIA0.

USER_TYPE

Type

String

Description

The category of user license.

Possible values are:

- `CsnOnly`—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users.
- `CspLitePortal`—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site.
- `CustomerSuccess`—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal.
- `Guest`—Users whose access is limited so that your customers can view and interact with your site without logging in.
- `PowerCustomerSuccess`—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through

a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy.

- **PowerPartner**—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site.
- **SelfService**—Users whose access is limited because they're organization customers and access the application through a self-service portal.
- **Standard**—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

Usage

Example: Identify Large Report Exports by User

Get Report event type data from the EventLogFile object using REST:

```
/services/data/v40.0/query?q=SELECT+Id+,+EventType+,+LogFile+,+LogDate+,+LogFileLength+FROM+EventLogFile+WHERE+
LogDate+>+Yesterday+AND+EventType+=+'Report '
```

After you download the report data to a ReportData database table, query it and filter on reports that were exported with high row counts and size:

```
SELECT USER_ID FROM ReportData WHERE (RENDERING_TYPE=C OR RENDERING_TYPE=X OR
RENDERING_TYPE=P) AND ROW_COUNT>150000 AND AVERAGE_ROW_SIZE>1500
```

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Report Export Event Type

Report Export events contain details about reports that a user exported. For example, this event type captures when a user exports a report as Details Only output. But it doesn't capture reports that users export as Formatted Report or XLSX Detail output. For that data, see the Report event type.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
CLIENT_IP	Type String

	Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
CLIENT_INFO	Type String Description Information about the client that's using Salesforce services.
CPU_TIME	Type Number Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
EVENT_TYPE	Type String Description The type of event. The value is always ReportExport.
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: 00D000000000123.
REPORT_DESCRIPTION	Type String Description Information about the report that was run.

REQUEST_ID

Type

String

Description

The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.

For example: 3nWgxWbDKWWDIk0FKfF5DV.

RUN_TIME

Type

Number

Description

The amount of time that the request took in milliseconds.

SESSION_KEY

Type

String

Description

The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.

For example: d7DEq/ANa7nNZZVD.

TIMESTAMP

Type

String

Description

The access time of Salesforce services in GMT.

For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type

DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

URI

Type

String

Description

The URI of the page that's receiving the request.

For example: /home/home.jsp.

URI_ID_DERIVED

Type

ID

	Description The 18-character case insensitive ID of the URI of the page that's receiving the request.
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API. For example: 00590000000I1SNIA0.

SEE ALSO:

[EventLogFile Supported Event Types](#)[EventLogFile](#)

REST API Event Type

REST API events contain details about REST-specific requests.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
BOT_IDENTIFIER	Type string Description The ID of the bot.
BOT_SESSION_IDENTIFIER	Type string Description The bot session ID.

CLIENT_IP

Type

String

Description

The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP".

For example: 96.43.144.26.

CLIENT_NAME

Type

String

Description

The name of the client that's using Salesforce services. This field is an optional parameter that can be passed in API calls.

CONNECTED_APP_ID

Type

Reference

Description

The 15-character ID of the connected app associated with the API call. For example, 0H4RM00000000Kx0AI.

CPU_TIME

Type

Number

Description

The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.

DB_BLOCKS

Type

Number

Description

Indicates how much activity is occurring in the database. A high value for this field suggests that adding indexes or filters on your queries would benefit performance.

DB_CPU_TIME

Type

Number

Description

The CPU time in milliseconds to complete the request. Indicates the amount of activity taking place in the database layer during the request.

DB_TOTAL_TIME

Type

Number

	Description The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and DB_CPU_TIME. Compare this field to CPU_TIME to determine whether performance issues are occurring in the database layer or in your own code.
ENTITY_NAME	Type Set Description The name of the object accessed by the API request. For example: Account, Opportunity, Contact, and so on.
EVENT_TYPE	Type String Description The type of event. The value is always RestApi.
EXCEPTION_MESSAGE	Type String Description The returned exception message, used to debug issues. Provide this message when seeking support.
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
MEDIA_TYPE	Type String Description The media type of the response.
METHOD	Type String Description The HTTP method of the request. For example: GET, POST, PUT, and so on.

NUMBER_FIELDS

Type

Number

Description

The number of fields or columns, where applicable.

ORGANIZATION_ID

Type

Id

Description

The 15-character ID of the organization.

For example: 00D0000000000123.

PLANNER_IDENTIFIER

Type

string

Description

The ID of the agent planner.

QUERY

Type

String

Description

The data that was queried.

REQUEST_SIZE

Type

Number

Description

The size of the callout request body, in bytes.

REQUEST_STATUS

Type

String

Description

The status of the request for a page view or user interface action.

For example:

- S—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned.
- F—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only.
- U—Undefined
- A—Authorization Error
- R—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page.
- N—Not Found. 404 error.

This field can have a blank value.

REQUEST_ID

Type

String

Description

The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.

For example: 3nWgxWbDKWWDIk0FKfF5DV.

RESPONSE_SIZE

Type

Number

Description

The size of the callout response, in bytes.

ROWS_PROCESSED

Type

Number

Description

The number of rows that were processed in the request.

For example: 150.

RUN_TIME

Type

Number

Description

The amount of time that the request took in milliseconds.

SESSION_KEY

Type

String

Description

The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.

For example: d7DEq/ANa7nNZZVD.

STATUS_CODE

Type

Number

Description

The HTTP response status code for the request.

TIMESTAMP

Type

String

Description

The access time of Salesforce services in GMT.

For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type

DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

URI

Type

String

Description

The URI of the page that's receiving the request.

For example: /home/home.jsp.

URI_ID_DERIVED

Type

ID

Description

The 18-character case insensitive ID of the URI of the page that's receiving the request.

USER_AGENT

Type

Number

Description

The numeric code for the type of client used to make the request (for example, the browser, application, or API).

USER_ID

Type

Id

Description

The 15-character ID of the user who's using Salesforce services through the UI or the API.

For example: 00530000009M943

USER_ID_DERIVED

Type

Id

Description

The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API.

For example: 00590000000I1SNIA0.

`USER_TYPE`**Type**

String

Description

The category of user license.

Possible values are:

- `CsnOnly`—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users.
- `CspLitePortal`—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site.
- `CustomerSuccess`—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal.
- `Guest`—Users whose access is limited so that your customers can view and interact with your site without logging in.
- `PowerCustomerSuccess`—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy.
- `PowerPartner`—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site.
- `SelfService`—Users whose access is limited because they're organization customers and access the application through a self-service portal.
- `Standard`—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

SEE ALSO:[EventLogFile Supported Event Types](#)[EventLogFile](#)

Sandbox Event Type

Sandbox events contain details about sandbox copies.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
CURRENT_SANDBOX_ORG_ID	Type Id Description The 15-character ID of the current sandbox organization.
EVENT_TYPE	Type String Description The type of event. The value is always <code>Sandbox</code> .
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: 00D000000000123.
PENDING_SANDBOX_ORG_ID	Type Id Description The 15-character ID of the target sandbox org.
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code> . For example: 3nWgxWbDKWWDIk0FKfF5DV.
SANDBOX_ID	Type Id Description The 15-character ID of the sandbox organization.
STATUS	Type String Description The status of the sandbox copy.

TIMESTAMP

Type

String

Description

The access time of Salesforce services in GMT.

For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type

DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

USER_ID

Type

Id

Description

The 15-character ID of the user who's using Salesforce services through the UI or the API.

For example: 00530000009M943

USER_ID_DERIVED

Type

Id

Description

The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API.

For example: 00590000000I1SNIA0.

SEE ALSO:[EventLogFile Supported Event Types](#)[EventLogFile](#)

Search Event Type

Search events contain details about the user's search query. All searches within the app, including Experience Cloud sites, are included. However, unauthenticated users won't have a unique Salesforce user ID.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field**Details**

EVENT_TYPE

Type

String

Description

The type of event. The value is always `Search`.

NUM_RESULTS

Type

Number

Description

Number of results returned by the search query.

Possible Values

- 0
- 25
- 1000

ORGANIZATION_ID

Type

Id

Description

The 15-character ID of the organization.

For example: 00D000000000123.

PREFIXES_SEARCHED

Type

String

Description

Space-separated list of key prefixes that were searched.

Example

001 006 ka0

QUERY_ID

Type

String

Description

Unique ID of the search query.

Example

-2vx8relit08r

REQUEST_ID

Type

String

Description

The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same `REQUEST_ID`.

For example: 3nWgxWbDKWWDIk0FKfF5DV.

SEARCH_QUERY

Type

String

Description

The first 100 characters of the search query.

Example

Salesforce

TIMESTAMP

Type

String

Description

The access time of Salesforce services in GMT.

For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type

DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

USER_ID

Type

Id

Description

The 15-character case insensitive ID of the user who's using Salesforce services through the UI or the API.

For example: 00590000000011SNIA0.

SEE ALSO:[EventLogFile Supported Event Types](#)[EventLogFile](#)

Search Click Event Type

Search Click events contain details about the user's interaction with the search results in the search results page. Interactions with search results in the instant result dialog are not recorded by this event. All searches within the app, including Experience Cloud sites, are included. However, unauthenticated users won't have a unique Salesforce user ID.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field**Details**

CLICKED_RECORD_ID

Type

String

Description

The 15-character ID of the result the user clicked in the search results page.

Example

a07B00000031pRV

EVENT_TYPE

Type

String

Description

The type of event. The value is always `SearchClick`.

ORGANIZATION_ID

Type

Id

Description

The 15-character ID of the organization.

For example: 00D000000000123.

QUERY_ID

Type

String

Description

Unique ID of the search query.

Example

-2vx8relit08r

RANK

Type

Number

Description

Ranking of the result clicked in the search results page.

Example

2

REQUEST_ID

Type

String

Description

The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same `REQUEST_ID`.

For example: 3nWgxWbDKWWDIk0FKfF5DV.

TIMESTAMP

Type

String

	Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
USER_ID	Type Id Description The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API. For example: 005900000000I1SNIA0.

SEE ALSO:

[EventLogFile Supported Event Types](#)
[EventLogFile](#)

Sites Event Type

Sites events contain details of Site.com requests. Requests can originate from the browser (UI).

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
CPU_TIME	Type Number

	Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DB_TOTAL_TIME	Type Number Description The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and DB_CPU_TIME. Compare this field to CPU_TIME to determine whether performance issues are occurring in the database layer or in your own code.
EVENT_TYPE	Type String Description The type of event. The value is always Sites.
HTTP_HEADERS	Type String Description The HTTP headers that were sent in the request.
HTTP_METHOD	Type String Description The HTTP method of the request. For example: GET, POST, PUT, and so on.
IS_API	Type Boolean Description True if this page was an API or Web Services request.
IS_ERROR	Type Boolean Description True if this page was an error page.
IS_FIRST_REQUEST	Type Boolean

	Description 1 if this page is the first Visualforce transaction in the request, or 0 if it isn't.
IS_GUEST	Type Boolean Description True if this page was a guest (unauthenticated) request.
IS_SECURE	Type Boolean Description True if this request is secure.
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: 00D0000000000123.
PAGE_NAME	Type String Description The name of the Visualforce page that was requested.
QUERY	Type String Description The SOQL query, if one was performed.
REQUEST_ID	Type String

Description

The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same `REQUEST_ID`.

For example: 3nWgxWbDKWWDIk0FKfF5DV.

`REQUEST_STATUS`

Type

String

Description

The status of the request for a page view or user interface action.

For example:

- `S`—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned.
- `F`—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only.
- `U`—Undefined
- `A`—Authorization Error
- `R`—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page.
- `N`—Not Found. 404 error.

This field can have a blank value.

`REQUEST_TYPE`

Type

String

Description

The request type.

Possible values are:

- `page`—a normal request for a page
- `content_UI`—a content request for a page that originated in the user interface
- `content_apex`—a content request initiated by an Apex call
- `PDF_UI`—a request for a page in PDF format through the user interface
- `PDF_apex`—a request for PDF format by an Apex call (usually a Web Service call)

`RUN_TIME`

Type

Number

	Description The amount of time that the request took in milliseconds.
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nZZVD.
SITE_ID	Type Id Description The 15-character ID of the Site.com site.
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
URI	Type String Description The URI of the page that's receiving the request. For example: /home/home.jsp.
URI_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the URI of the page that's receiving the request.

USER_ID

Type

Id

Description

The 15-character ID of the user who's using Salesforce services through the UI or the API.

For example: 00530000009M943

USER_ID_DERIVED

Type

Id

Description

The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API.

For example: 00590000000I1SNIA0.

USER_TYPE

Type

String

Description

The category of user license.

Possible values are:

- `CsnOnly`—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users.
- `CspLitePortal`—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site.
- `CustomerSuccess`—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal.
- `Guest`—Users whose access is limited so that your customers can view and interact with your site without logging in.
- `PowerCustomerSuccess`—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy.
- `PowerPartner`—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site.

- `SelfService`—Users whose access is limited because they’re organization customers and access the application through a self-service portal.
- `Standard`—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

SEE ALSO:
[EventLogFile Supported Event Types](#)
[EventLogFile](#)

SOAP API Event Type

SOAP API events contain details about your org's SOAP API request activity.
For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
<code>API_TYPE</code>	Type String Description The type of API request. Possible values are: • <code>D</code>—Apex Class • <code>E</code>—SOAP Enterprise • <code>M</code>—SOAP Metadata • <code>P</code>—SOAP Partner • <code>S</code>—SOAP Apex • <code>T</code>—SOAP Tooling • <code>F</code>—Feed • <code>L</code>—Live Agent • <code>p</code>—SOAP ClientSync
<code>API_VERSION</code>	Type String Description The version of the API that’s being used. For example: <code>36.0</code>.

CLIENT_IP

Type

String

Description

The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP".

For example: 96 . 43 . 144 . 26.

CLIENT_NAME

Type

String

Description

The name of the client that's using Salesforce services. This field is an optional parameter that can be passed in API calls. If blank, the caller didn't specify a client in the CallOptions header.

CPU_TIME

Type

Number

Description

The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.

DB_BLOCKS

Type

Number

Description

Indicates how much activity is occurring in the database. A high value for this field suggests that adding indexes or filters on your queries would benefit performance.

DB_CPU_TIME

Type

Number

Description

The CPU time in milliseconds to complete the request. Indicates the amount of activity taking place in the database layer during the request.

DB_TOTAL_TIME

Type

Number

Description

The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and DB_CPU_TIME. Compare this field to CPU_TIME to determine whether performance issues are occurring in the database layer or in your own code.

ENTITY_NAME

Type

Set

Description

The name of the object accessed by the API request.

For example: Account, Opportunity, Contact, and so on.

EVENT_TYPE

Type

String

Description

The type of event. The value is always API.

EXCEPTION_MESSAGE

Type

String

Description

The exception message for a SOAP API request. An exception message gives details about errors in handling an API request, such as why an API request failed.

For example: `common.exception.ApiException: startDate cannot be more than 30 days ago.`

LOGIN_KEY

Type

String

Description

The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.

For example: `GeJCsym5eyvtEK2I.`

METHOD_NAME

Type

String

Description

The name of the calling Apex method.

ORGANIZATION_ID

Type

Id

Description

The 15-character ID of the organization.

For example: `00D000000000123.`

QUERY

Type

String

	Description The data that was queried.
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. For example: 3nWgxWbDKWWDIk0FKfF5DV.
REQUEST_SIZE	Type Number Description The size of the callout request body, in bytes.
REQUEST_STATUS	Type String Description The status of the request for a page view or user interface action. For example: • S—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned. • F—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only. • U—Undefined • A—Authorization Error • R—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page. • N—Not Found. 404 error. This field can have a blank value.
RESPONSE_SIZE	Type Number Description The size of the callout response, in bytes.
ROWS_PROCESSED	Type Number

	Description The number of rows that were processed in the request. For example: 150.
RUN_TIME	Type Number Description The amount of time that the request took in milliseconds.
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
URI	Type String Description The URI of the page that's receiving the request. For example: /home/home.jsp.
URI_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the URI of the page that's receiving the request.

USER_ID

Type

Id

Description

The 15-character ID of the user who's using Salesforce services through the UI or the API.

For example: 00530000009M943

USER_ID_DERIVED

Type

Id

Description

The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API.

For example: 00590000000I1SNIA0.

USER_TYPE

Type

String

Description

The category of user license.

Possible values are:

- `CsnOnly`—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users.
- `CspLitePortal`—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site.
- `CustomerSuccess`—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal.
- `Guest`—Users whose access is limited so that your customers can view and interact with your site without logging in.
- `PowerCustomerSuccess`—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy.
- `PowerPartner`—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site.

- `SelfService`—Users whose access is limited because they’re organization customers and access the application through a self-service portal.
- `Standard`—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

SEE ALSO:
[EventLogFile Supported Event Types](#)
[EventLogFile](#)

Time-Based Workflow Event Type

Time-Based Workflow events contain details about queue activity monitoring.
For details about event monitoring, see the [Trailhead Event Monitoring module](#) or the [REST API Developer’s Guide](#).

Fields

 **Note:** Time-Based Workflow events only support workflow rules, and not flow scheduled path time-queue records. Event logs do not show flow scheduled path time-queue records.

Field	Details
CLIENT_IP	Type String Description The IP address of the client that’s using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as “Salesforce.com IP”. For example: 96 . 43 . 144 . 26.
CPU_TIME	Type Number Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DATA	Type String Description The record details of time queue activity.

EVENT_TYPE

Type

String

Description

The type of event. The value is always `TimeBasedWorkflow`.

LOG_GROUP_ID

Type

String

Description

Marks log records that are committed or rolled back.

LOGIN_KEY

Type

String

Description

The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.

For example: `GeJCsym5eyvtEK2I`.

NUMBER_OF_RECORDS

Type

Number

Description

The number of processed records.

ORGANIZATION_ID

Type

Id

Description

The 15-character ID of the organization.

For example: `00D000000000123`.

REQUEST_ID

Type

String

Description

The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same `REQUEST_ID`.

For example: `3nWgxWbDKWWDIk0FKfF5DV`.

RUN_TIME

Type

Number

Description

The amount of time that the request took in milliseconds.

SESSION_KEY

Type

String

Description

The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.

For example: d7DEq/ANa7nNZZVD.

TIMESTAMP

Type

String

Description

The access time of Salesforce services in GMT.

For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type

DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

TYPE

Type

String

Description

The type of time-based workflow event.

- **UIDEL**—An entry was deleted from the Time-Based Automations page in Setup.
- **ERRDEL**—An entry was deleted from the workflow queue, because there was an error reading the record that triggered the workflow rule. The associated time-dependent actions weren't processed.
- **DELETE**—An entry was deleted from the workflow queue, because it's no longer relevant. For example, the criteria are no longer met by the associated record. If the evaluation date for the entry changed, the entry is re-added with the updated evaluation date.
- **PROC**—An entry was deleted from the workflow queue after processing a time-dependent action.

URI

Type

String

	Description The URI of the page that's receiving the request. For example: /home/home.jsp.
URI_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the URI of the page that's receiving the request.
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 005300000009M943
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API. For example: 00590000000I1SNIA0.

SEE ALSO:

[EventLogFile Supported Event Types](#)
[EventLogFile](#)

Transaction Security Event Type

Transaction Security events contain details about policy execution. This event type is supported in API version 55.0 and later.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
BOT_IDENTIFIER	Type String Description The ID of the bot.

BOT_SESSION_IDENTIFIER

Type

String

Description

The bot session ID.

CLIENT_IP

Type

String

Description

The IP address of the client that is using Salesforce services. A Salesforce internal IP, such as a login from AppExchange, is shown as "Salesforce.com IP".

For example: 96.43.144.26

CPU_TIME

Type

Number

Description

The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.

EVALUATION_TIME_MS

Type

Number

Description

The time in milliseconds used to evaluate the policy.

EVENT_TIMESTAMP

Type

String

Description

The time at which the Transaction Security event was generated in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). This value can be earlier than TIMESTAMP_DERIVED by the amount of time taken to log the event.

For example:

2015-07-27T11:32:59.555Z

EVENT_TYPE

Type

String

	Description The type of event. The value is always <code>TransactionSecurity</code> .
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: <code>GeJCSym5eyvtEK2I</code>
ORGANIZATION_ID	Type ID Description The 15-character ID of the organization. For example: <code>00D000000000123</code>
PLANNER_IDENTIFIER	Type String Description The ID of the agent planner.
POLICY_ID	Type ID Description The 15-character ID of the policy being evaluated. For example: <code>00530000009M943</code>
POLICY_ID_DERIVED	Type ID Description The 18-character case-insensitive ID of the policy being evaluated. For example: <code>00590000000I1SNIA0</code>
REQUEST_ID	Type String

	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. For example: 3nWgxWbDKWWDIk0FKfF5DV
RESULT	Type String Description The outcome of evaluating the policy. For example: TRIGGEREDzzz or NOT TRIGGERED
RUN_TIME	Type Number Description The amount of time that the request took in milliseconds.
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670
TIMESTAMP_DERIVED	Type DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example:

2015-07-27T11:32:59.555Z.

Timezone is GMT.

URI

Type

String

Description

The URI of the page that's receiving the request.

For example: /home/home.jsp

URI_ID_DERIVED

Type

ID

Description

The 18-character case insensitive ID of the URI of the page that's receiving the request.

USER_ID

Type

ID

Description

The 15-character ID of the user who is using Salesforce services through the UI or the API.

For example: 00530000009M943

USER_ID_DERIVED

Type

ID

Description

The 18-character case insensitive ID of the user who is using Salesforce services through the UI or the API.

For example:

00590000000I1SNIA0

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

UI Telemetry Navigation Timing Event Type

UI Telemetry Navigation Timing events capture network performance metrics related to page navigation. The event extends from the [UI Telemetry Resource Timing Event](#) on page 2412 and includes requests initiated with either the [Fetch API](#) or the [XMLHttpRequest API](#). This object is available in API version 61.0 and later.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer Guide](#).

For information about navigation timing attributes, including a diagram of the order that attributes follow, see section 4.1 of the W3 Standards on [Navigation Timing Level 2](#).

Fields

Field	Details
APP_NAME	Type String Description The name of the application that the user accessed.
BROWSER_NAME	Type String Description The name of the browser that the user accessed. Example Chrome, Safari
BROWSER_VERSION	Type String Description The version of the browser that the user accessed in <code>major.minor version</code> format. Some browsers don't provide a minor version.
CLIENT_GEO	Type String Description The geolocation of the client in the form of <code><Country>/<State Province></code> . Example United States/California
CLIENT_ID	Type String Description The API client ID.

Field	Details
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP, such as a login from AppExchange, is shown as <code>Salesforce.com</code> IP. Example <code>96.43.144.26</code>
CONNECT_END	Type Number Description The time in milliseconds when the browser establishes a connection to a server so that it can retrieve a resource. To calculate the Transport Control Protocol (TCP) handshake time, subtract the <code>CONNECT_START</code> time from the <code>CONNECT_END</code> time.
CONNECT_START	Type Number Description The time in milliseconds after the browser completes the Domain Name System (DNS) lookup and begins connecting to a server so that it can retrieve a resource. To calculate the Transport Control Protocol (TCP) handshake time, subtract the <code>CONNECT_START</code> time from the <code>CONNECT_END</code> time.
CONNECTION_TYPE	Type String Description The type of connection. Possible Values • CDMA1x • CDMA • EDGE • EVDO0 • EVDOA • EVDOB • GPRS • HRPD • HSDPA • HSUPA • LTE

Field	Details
	WIFI
DECODED_BODY_SIZE	Type Number Description The size in octets of the HTTP message body after the removal of any applied content encoding.
DEVICE_MODEL	Type String Description The name of the device model. Example iPad, iPhone
DEVICE_PLATFORM	Type String Description The type of application experience in <code>name:experience:form</code> format. Possible Values <code>name: APP_BUILDER, CUSTOM, S1, SFX</code> <code>experience: BROWSER, HYBRID</code> <code>form: DESKTOP, PHONE, TABLET</code>
DEVICE_SESSION_ID	Type String Description The unique identifier of the user's session based on page load time. When the user reloads a page, a new session is started. Example 321a1ddfaf924803a075f1e69fc87bc06f53ccd0
DOM_COMPLETE	Type Number Description The time in milliseconds when the page's <code>readyState</code> property is set to <code>complete</code>. Indicates that the page and its subresources have finished loading.
DOM_CONTENT_LOADED_EVENT_END	Type Number

Field	Details
	Description The time in milliseconds when the page's <code>DOMContentLoaded</code> event handler completes. To calculate the processing time for the <code>DOMContentLoaded</code> event handler, subtract the <code>DOM_CONTENT_LOADED_EVENT_START</code> time from the <code>DOM_CONTENT_LOADED_EVENT_END</code> time.
<code>DOM_CONTENT_LOADED_EVENT_START</code>	Type Number Description The time in milliseconds when the page's <code>DOMContentLoaded</code> event handler starts. To calculate the processing time for the <code>DOMContentLoaded</code> event handler, subtract the <code>DOM_CONTENT_LOADED_EVENT_START</code> time from the <code>DOM_CONTENT_LOADED_EVENT_END</code> time.
<code>DOM_INTERACTIVE</code>	Type Number Description The time in milliseconds when the page's <code>readyState</code> is set to <code>interactive</code>. Indicates that the page has finished loading, but subresources, such as images and scripts, are still loading.
<code>DOMAIN_LOOKUP_END</code>	Type Number Description The time in milliseconds when the browser completes a DNS lookup for a resource. To calculate the DNS lookup time, subtract the <code>DOMAIN_LOOKUP_START</code> time from the <code>DOMAIN_LOOKUP_END</code> time.
<code>DOMAIN_LOOKUP_START</code>	Type Number Description The time in milliseconds when the browser starts a DNS lookup for a resource. To calculate the DNS lookup time, subtract the <code>DOMAIN_LOOKUP_START</code> time from the <code>DOMAIN_LOOKUP_END</code> time.
<code>DURATION</code>	Type Number Description The total duration in milliseconds of the event from the <code>START_TIME</code> to the <code>LOAD_EVENT_END</code> time.

Field	Details
ENCODED_BODY_SIZE	Type Number Description The size in octets of the HTTP message body before the removal of any applied content encoding.
EVENT_TYPE	Type String Description The type of event. The value is always <code>UITelemetryNavigationTiming</code>.
FETCH_START	Type Number Description The time in milliseconds when the browser starts to fetch a resource from the server, not including redirects. Occurs before the DNS lookup and the connection to the server is established. To calculate the total time used to fetch a resource without redirects, subtract the <code>FETCH_START</code> time from the <code>RESPONSE_END</code> time.
FIRST_INTERIM_RESPONSE_START	Type Number Description The time in milliseconds when the browser receives the first byte of the interim 1xx response from the server. To calculate the time from when the browser sends a request to when it starts to receive an interim response, subtract the <code>REQUEST_START</code> time from the <code>FIRST_INTERIM_RESPONSE_START</code> time.
INITIATOR_TYPE	Type String Description The HTML element that initiates the resource load. Example <code>css, image, link</code>
LOAD_EVENT_END	Type Number Description The time in milliseconds when the page's <code>load</code> event handler completes.

Field	Details
	To calculate the processing time for the <code>load</code> event handler, subtract the <code>LOAD_EVENT_START</code> time from the <code>LOAD_EVENT_END</code> time.
<code>LOAD_EVENT_START</code>	Type Number Description The time in milliseconds when the page's <code>load</code> event handler begins. To calculate the processing time for the <code>load</code> event handler, subtract the <code>LOAD_EVENT_START</code> time from the <code>LOAD_EVENT_END</code> time.
<code>LOGIN_KEY</code>	Type String Description The string that ties together all events in a user's login session. It starts with a login event and ends with either a logout event or the user session expiring. Example <code>GeJCsym5eyvtEK2I</code>
<code>NAVIGATION_TYPE</code>	Type String Description The type of navigation timing data. Possible Values • <code>navigate</code>: a user interaction or a script initiated navigation. • <code>reload</code>: a reload initiated navigation. • <code>back_forward</code>: navigation traverses the browser's history. • <code>prerender</code>: a prerender hint initiated navigation.
<code>NEXT_HOP_PROTOCOL</code>	Type String Description The Application-Layer Protocol Negotiation (ALPN) Protocol ID that fetches the resource. Possible Values <code>http/0.9</code>, <code>http/1.0</code>, <code>h2</code>, <code>h2c</code>, <code>h3</code>
<code>ORGANIZATION_ID</code>	Type String Description The 15-character ID of the org. Example <code>00D000000000123</code>

Field	Details
OS_NAME	Type String Description The operating system name, derived from USER_AGENT. Example Android, iOS, OSX
OS_VERSION	Type String Description The operating system version, derived from USER_AGENT.
PAGE_CONTEXT	Type String Description The name of the component hosting the main content of the page. Example clients:cardsContainer
PAGE_ENTITY_ID	Type String Description The unique entity identifier of the event. Example 0013000000I3zJAAAZ
PAGE_ENTITY_TYPE	Type String Description The entity type of the event. Example task, contacts
PAGE_URL	Type String Description The relative URL of the top-level Lightning Experience page that the user opened. The page can contain one or more Lightning components. Multiple record IDs can be associated with PAGE_URL. Example /sObject/0064100000JXITSAA5/view

Field	Details
REDIRECT_COUNT	Type Number Description The total number of redirects since the last non-redirect navigation in the current browsing context.
REDIRECT_END	Type Number Description The time in milliseconds when the browser receives the last byte of the response of the final redirect. To calculate the total redirection time, subtract the REDIRECT_START time from the REDIRECT_END time.
REDIRECT_START	Type Number Description The time in milliseconds when the browser starts to fetch a resource that initiates a redirect. To calculate the total redirection time, subtract the REDIRECT_START time from the REDIRECT_END time.
RENDER_BLOCKING_STATUS	Type String Description The status that indicates whether the resource can block or delay the browser from rendering page content. Possible Values • blocking: the resource can block rendering. • codenon-blocking: the resource doesn't block rendering.
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. Example 3nWgxWbDKWWDIk0FKfF5DV
REQUEST_START	Type Number

Field	Details
	Description The time in milliseconds when the browser starts to request the resource from the server. To calculate the total request time, subtract the REQUEST_START time from the RESPONSE_START time.
RESPONSE_END	Type Number Description The time in milliseconds when the browser receives the resource's last byte or when the transport connection closes, whichever comes first. To calculate the total time used to fetch a resource without redirects, subtract the FETCH_START time from the RESPONSE_END time.
RESPONSE_START	Type Number Description The time in milliseconds when the browser receives the first byte of the response from the server. To calculate the total request time, subtract the REQUEST_START time from the RESPONSE_START time.
RESPONSE_STATUS	Type Number Description The HTTP response status code. Example 200
SDK_APP_TYPE	Type String Description The mobile SDK application type. Possible Values • HYBRID • HYBRIDLOCAL • HYBRIDREMOTE • NATIVE • REACTNATIVE

Field	Details
SDK_APP_VERSION	Type String Description The mobile SDK application version number. Example 5 . 0
SDK_VERSION	Type String Description The mobile SDK version number. Example 2 . 1 . 0
SECURE_CONNECT_START	Type Number Description The time in milliseconds when the browser begins the handshake process that secures the connection. To calculate the Transport Layer Security (TLS) time, subtract the SECURE_CONNECT_START time from the REQUEST_START time.
SERVER_REQUEST_ID	Type String Description The request ID for the server request that's used to find associated server logs. Example 346000000087551ecb
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all events in Lightning Experience within a session. When the user logs out and logs in again, a new session starts. Example cdd09305cb6babf34059e27f70e47f1b11dec868
START_TIME	Type Number Description The time in milliseconds when the browser starts to fetch the resource, including redirects.

Field	Details
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. Example 20130715233322.670
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). Example 2015-07-27T11:32:59.555Z. The timezone is GMT.
TRANSFER_SIZE	Type Number Description The size in octets of the resource, including the response header and the response payload body.
UI_EVENT_RELATIVE_TIMESTAMP	Type Number Description The difference in milliseconds between when the event is logged and when the browser tab is opened. Example 29322.23
UI_EVENT_TIMESTAMP	Type Number Description The time at which this event occurs, measured in milliseconds. Example 1479769912796
UI_ROOT_ACTIVITY_ID	Type String Description The ID of the root activity when the event occurs.

Field	Details
UI_THREAD_RESPONSE_DELAY	Type Number Description The time in milliseconds from when the browser receives the response to when it executes the callback. This delay occurs if the main Javascript thread is busy when the response is received.
UNLOAD_EVENT_END	Type Number Description The time in milliseconds when the page's <code>unload</code> event handler completes. To calculate the processing time for the <code>unload</code> event handler, subtract the <code>UNLOAD_EVENT_START</code> time from the <code>UNLOAD_EVENT_END</code> time.
UNLOAD_EVENT_START	Type Number Description The time in milliseconds when the page's <code>unload</code> event handler starts. To calculate the processing time for the <code>unload</code> event handler, subtract the <code>UNLOAD_EVENT_START</code> time from the <code>UNLOAD_EVENT_END</code> time.
URL	Type String Description The URL of the request.
USER_ID	Type String Description The 15-character ID of the user accessing Salesforce services through the UI or API. Example 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case-insensitive ID of the user who's using Salesforce services through the UI or the API. Example 005900000000I1SNIA0

Field	Details
USER_TYPE	Type String Description The category of user license of the user accessing Salesforce services through the UI or API. Possible Values • A: Automated Process • b: High Volume Portal • C: Customer Portal User • D: External Who • F: Self-Service • G: Guest • L: Package License Manager • N: Salesforce to Salesforce • n: CSN Only • O: Power Custom • o: Custom • P: Partner • p: Customer Portal Manager • S: Standard • X: Salesforce Administrator
WORKER_START	Type Number Description If a service worker is installed, the time in milliseconds when the active service worker receives the <code>fetch</code> event. To measure the service worker processing time, subtract the <code>WORKER_START</code> time from the <code>FETCH_START</code> time.

SEE ALSO:

[EventLogFile Supported Event Types](#)[EventLogFile](#)

UI Telemetry Resource Timing Event

UI Telemetry Resource Timing events capture network performance metrics related to loading an application's resources. The event includes requests initiated with either the [Fetch API](#) or the [XMLHttpRequest API](#). This object is available in API version 61.0 and later.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer Guide](#).

For information about resource timing attributes, including a diagram of the order that attributes follow, see section 4.6 of the W3 Standards on [Resource Timing](#).

Fields

Field	Details
APP_NAME	Type String Description The name of the application that the user accessed.
BROWSER_NAME	Type String Description The name of the browser that the user accessed. Example Chrome, Safari
BROWSER_VERSION	Type String Description The version of the browser that the user accessed in <code>major.minor version</code> format. Some browsers don't provide a minor version.
CLIENT_GEO	Type String Description The geolocation of the client in the form of <code><Country>/<State Province></code> . Example United States/California
CLIENT_ID	Type String Description The API client ID.
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP, such as a login from AppExchange, is shown as "Salesforce.com IP." Example 96.43.144.26

Field	Details
CONNECT_END	Type Number Description The time in milliseconds when the browser establishes a connection to a server so that it can retrieve a resource. To calculate the Transport Control Protocol (TCP) handshake time, subtract the CONNECT_START time from the CONNECT_END time.
CONNECT_START	Type Number Description The time in milliseconds after the browser completes the Domain Name System (DNS) lookup and begins connecting to a server so that it can retrieve a resource. To calculate the Transport Control Protocol (TCP) handshake time, subtract the CONNECT_START time from the CONNECT_END time.
CONNECTION_TYPE	Type String Description The type of connection. Possible Values • CDMA1x • CDMA • EDGE • EVDO0 • EVDOA • EVDOB • GPRS • HRPD • HSDPA • HSUPA • LTE • WIFI
DECODED_BODY_SIZE	Type Number Description The size in octets of the HTTP message body after the removal of any applied content encoding.

Field	Details
DEVICE_MODEL	Type String Description The name of the device model. Example iPad, iPhone
DEVICE_PLATFORM	Type String Description The type of application experience in <code>name:experience:form</code> format. Possible Values • <code>name: APP_BUILDER, CUSTOM, S1, SFX</code> • <code>experience: BROWSER, HYBRID</code> • <code>form: DESKTOP, PHONE, TABLET</code>
DEVICE_SESSION_ID	Type String Description The unique identifier of the user's session based on page load time. When the user reloads a page, a new session is started. Example 321a1ddfaf924803a075f1e69fc87bc06f53ccd0
DOMAIN_LOOKUP_END	Type Number Description The time in milliseconds when the browser completes a DNS lookup for a resource. To calculate the DNS lookup time, subtract the <code>DOMAIN_LOOKUP_START</code> time from the <code>DOMAIN_LOOKUP_END</code> time.
DOMAIN_LOOKUP_START	Type Number Description The time in milliseconds when the browser starts a DNS lookup for a resource. To calculate the DNS lookup time, subtract the <code>DOMAIN_LOOKUP_START</code> time from the <code>DOMAIN_LOOKUP_END</code> time.
DURATION	Type Number

Field	Details
	Description The total duration in milliseconds of the event from the <code>START_TIME</code> to the <code>RESPONSE_END</code> time.
ENCODED_BODY_SIZE	Type Number Description The size in octets of the HTTP message body before the removal of any applied content encoding.
EVENT_TYPE	Type String Description The type of event. The value is always <code>UITelemetryResourceTiming</code> .
FETCH_START	Type Number Description The time in milliseconds when the browser starts to fetch a resource from the server, not including redirects. Occurs before the DNS lookup and the connection to the server is established. To calculate the total time used to fetch a resource without redirects, subtract the <code>FETCH_START</code> time from the <code>RESPONSE_END</code> time.
FIRST_INTERIM_RESPONSE_START	Type Number Description The time in milliseconds when the browser receives the first byte of the interim 1xx response from the server. To calculate the time from when the browser sends a request to when it starts to receive an interim response, subtract the <code>REQUEST_START</code> time from the <code>FIRST_INTERIM_RESPONSE_START</code> time.
INITIATOR_TYPE	Type String Description The HTML element that initiates the resource load. Example <code>css, image, link</code>
LOGIN_KEY	Type String

Field	Details
	Description The string that ties together all events in a user's login session. It starts with a login event and ends with either a logout event or the user session expiring. Example GeJCsym5eyvtEK2I
NEXT_HOP_PROTOCOL	Type String Description The Application-Layer Protocol Negotiation (ALPN) Protocol ID that fetches the resource. Possible Values http/0.9, http/1.0, h2, h2c, h3
ORGANIZATION_ID	Type String Description The 15-character ID of the org. Example 00D000000000123
OS_NAME	Type String Description The operating system name, derived from USER_AGENT. Example Android, iOS, OSX, Window
OS_VERSION	Type String Description The operating system version, derived from USER_AGENT.
PAGE_CONTEXT	Type String Description The name of the component hosting the main content of the page. Example clients:cardsContainer
PAGE_ENTITY_ID	Type String

Field	Details
	Description The unique entity identifier of the event. Example 0013000000I3zJAAAZ
PAGE_ENTITY_TYPE	Type String Description The entity type of the event. Example task, contacts
PAGE_URL	Type String Description Relative URL of the top-level Lightning Experience page that the user opened. The page can contain one or more Lightning components. Multiple record IDs can be associated with PAGE_URL. Example /sObject/0064100000JXITSAA5/view
REDIRECT_END	Type Number Description The time in milliseconds when the browser receives the last byte of the response of the final redirect. To calculate the total redirection time, subtract the REDIRECT_START time from the REDIRECT_END time.
REDIRECT_START	Type Number Description The time in milliseconds when the browser starts to fetch a resource that initiates a redirect. To calculate the total redirection time, subtract the REDIRECT_START time from the REDIRECT_END time.
RENDER_BLOCKING_STATUS	Type String Description The status that indicates whether the resource can block or delay the browser from rendering page content.

Field	Details
	Possible Values • <code>blocking</code>: the resource can block rendering. • <code>codenon-blocking</code>: the resource doesn't block rendering.
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. Example 3nWgxWbDKWWDIk0FKfF5DV
REQUEST_START	Type Number Description The time in milliseconds when the browser starts to request the resource from the server. To calculate the total request time, subtract the REQUEST_START time from the RESPONSE_START time.
RESPONSE_END	Type Number Description The time in milliseconds when the browser receives the resource's last byte or when the transport connection closes, whichever comes first. To calculate the total time used to fetch a resource without redirects, subtract the FETCH_START time from the RESPONSE_END time.
RESPONSE_START	Type Number Description The time in milliseconds when the browser receives the first byte of the response from the server. To calculate the total request time, subtract the REQUEST_START time from the RESPONSE_START time.
RESPONSE_STATUS	Type Number Description The HTTP response status code.

Field	Details
	Example 200
SDK_APP_TYPE	Type String Description The mobile SDK application type. Possible Values • HYBRID • HYBRIDLOCAL • HYBRIDREMOTE • NATIVE • REACTNATIVE
SDK_APP_VERSION	Type String Description The mobile SDK application version number. Example 5.0
SDK_VERSION	Type String Description The mobile SDK version number. Example 2.1.0
SECURE_CONNECT_START	Type Number Description The time in milliseconds when the browser begins the handshake process that secures the connection. To calculate the Transport Layer Security (TLS) time, subtract the SECURE_CONNECT_START time from the REQUEST_START time.
SERVER_REQUEST_ID	Type String Description The requestId for the server request that's used to find associated server logs.

Field	Details
	Example 346000000087551ecb
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all events in Lightning Experience within a session. When the user logs out and logs in again, a new session starts. Example cdd09305cb6babf34059e27f70e47f1b11dec868
START_TIME	Type Number Description The time in milliseconds when the browser starts to fetch the resource, including redirects.
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. Example 20130715233322.670
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). Example 2015-07-27T11:32:59.555Z. The timezone is GMT.
TRANSFER_SIZE	Type Number Description The size in octets of the resource, including the response header and the response payload body.
UI_EVENT_RELATIVE_TIMESTAMP	Type Number Description The difference in milliseconds between when the event is logged and when the browser tab is opened.

Field	Details
	Example 29322.23
UI_EVENT_TIMESTAMP	Type Number Description The time at which this event occurs, measured in milliseconds. Example 1479769912796
UI_ROOT_ACTIVITY_ID	Type String Description The ID of the root activity when the event occurs.
UI_THREAD_RESPONSE_DELAY	Type Number Description The time in milliseconds from when the browser receives the response to when it executes the callback. This delay occurs if the main Javascript thread is busy when the response is received.
URL	Type String Description The URL of the request.
USER_ID	Type String Description The 15-character ID of the user accessing Salesforce services through the UI or API. Example 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case-insensitive ID of the user who's using Salesforce services through the UI or the API. Example 005900000000I1SNIA0

Field	Details
USER_TYPE	Type String Description The category of user license of the user accessing Salesforce services through the UI or API. Possible Values • A: Automated Process • b: High Volume Portal • C: Customer Portal User • D: External Who • F: Self-Service • G: Guest • L: Package License Manager • N: Salesforce to Salesforce • n: CSN Only • O: Power Custom • o: Custom • P: Partner • p: Customer Portal Manager • S: Standard • X: Salesforce Administrator
WORKER_START	Type Number Description The time in milliseconds when the active service worker receives the <code>fetch</code> event, if a service worker is installed. To measure the service worker processing time, subtract the <code>WORKER_START</code> time from the <code>FETCH_START</code> time.

SEE ALSO:

[EventLogFile Supported Event Types](#)[EventLogFile](#)

Unique Query Event Type

Unique Query events capture specific search queries (SOQL), filter IDs, and report IDs that are processed, along with the underlying database queries (SQL). This event type is available in API versions 64.0 and later.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
BOT_IDENTIFIER	Type string Description The ID of the bot.
BOT_SESSION_IDENTIFIER	Type string Description The bot session ID.
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: 00D000000000123.
PLANNER_IDENTIFIER	Type string Description The ID of the agent planner.
QUERY_IDENTIFIER	Type String Description The text of the SOQL query run or the Id of the report or list view run.
QUERY_TYPE	Type String Description The input type to the optimizer that was translated.

	Possible Values • soql • filter • report
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
SQL_ID	Type String Description The unique identifier generated for the database query.

URI Event Type

URI events contain details about user interaction with the web browser UI.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
CPU_TIME	Type Number Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.

DB_BLOCKS

Type

Number

Description

Indicates how much activity is occurring in the database. A high value for this field suggests that adding indexes or filters on your queries would benefit performance.

DB_CPU_TIME

Type

Number

Description

The CPU time in milliseconds to complete the request. Indicates the amount of activity taking place in the database layer during the request.

DB_TOTAL_TIME

Type

Number

Description

The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and DB_CPU_TIME. Compare this field to CPU_TIME to determine whether performance issues are occurring in the database layer or in your own code.

EVENT_TYPE

Type

String

Description

The type of event. The value is always URI.

LOGIN_KEY

Type

String

Description

The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.

For example: GeJCsym5eyvtEK2I.

ORGANIZATION_ID

Type

Id

Description

The 15-character ID of the organization.

For example: 00D000000000123.

REFERRER_URI

Type

String

	Description The referring URI of the page that's receiving the request.
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. For example: 3nWgxWbDKWWDIk0FKfF5DV.
REQUEST_STATUS	Type String Description The status of the request for a page view or user interface action. For example: • S—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned. • F—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only. • U—Undefined • A—Authorization Error • R—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page. • N—Not Found. 404 error. This field can have a blank value.
RUN_TIME	Type Number Description The amount of time that the request took in milliseconds.
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.

TIMESTAMP

Type

String

Description

The access time of Salesforce services in GMT.

For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type

DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

URI

Type

String

Description

The URI of the page that's receiving the request. For more granular URI information for Lightning Experience and the Salesforce app, see the Lightning Error, Lightning Interaction, Lightning Page View, and Lightning Performance event types.

Examples

/aura (Lightning Experience), /lightning (Lightning Experience and the Salesforce app), /home/home.jsp (Salesforce Classic)

URI_ID_DERIVED

Type

ID

Description

The 18-character case insensitive ID of the URI of the page that's receiving the request.

USER_ID

Type

Id

Description

The 15-character ID of the user who's using Salesforce services through the UI or the API.

For example: 00530000009M943

USER_ID_DERIVED

Type

Id

Description

The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API.

For example: 005900000000I1SNIA0.

USER_TYPE

Type

String

Description

The category of user license.

Possible values are:

- **CsnOnly**—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users.
 - **CspLitePortal**—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site.
 - **CustomerSuccess**—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal.
 - **Guest**—Users whose access is limited so that your customers can view and interact with your site without logging in.
 - **PowerCustomerSuccess**—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy.
 - **PowerPartner**—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site.
 - **SelfService**—Users whose access is limited because they're organization customers and access the application through a self-service portal.
 - **Standard**—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.
-

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Visualforce Request Event Type

Visualforce Request events contain details of Visualforce requests. Requests can originate from the browser (UI).

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.
CONTROLLER_TYPE	Type Number Description The type of controller that's used by the requested Visualforce page. Possible Values • 0: NOT_SPECIFIED—The controller type is not specified. • 1: STANDARD—The controller is a standard controller. • 2: CUSTOM—The controller is a custom controller or controller extension. • 3: JAVA—For internal use only. • 4: STANDARD_SET—The controller is a standard list controller. • 5: SPRING—Not used.
CPU_TIME	Type Number Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DB_BLOCKS	Type Number

	Description Indicates how much activity is occurring in the database. A high value for this field suggests that adding indexes or filters on your queries would benefit performance.
DB_CPU_TIME	Type Number Description The CPU time in milliseconds to complete the request. Indicates the amount of activity taking place in the database layer during the request.
DB_TOTAL_TIME	Type Number Description The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and DB_CPU_TIME. Compare this field to CPU_TIME to determine whether performance issues are occurring in the database layer or in your own code.
EVENT_TYPE	Type String Description The type of event. The value is always VisualforceRequest.
HTTP_METHOD	Type String Description The HTTP method of the request. For example: GET, POST, PUT, and so on.
IS_AJAX_REQUEST	Type Boolean Description The value is true if the request is a partial page request.
IS_FIRST_REQUEST	Type Boolean Description 1 if this page is the first Visualforce transaction in the request, or 0 if it isn't.

LOGIN_KEY

Type

String

Description

The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.

For example: GeJCsym5eyvtEK2I.

MANAGED_PACKAGE_NAMESPACE

Type

String

Description

If the page is part of a managed package, the namespace of that package.

ORGANIZATION_ID

Type

Id

Description

The 15-character ID of the organization.

For example: 00D000000000123.

PAGE_NAME

Type

String

Description

The name of the Visualforce page that was requested.

QUERY

Type

String

Description

The query string used to access the requested Visualforce page.

Example

Let's assume that the requested Visualforce page (/apex/myAccountDetailPage?id=001xx000003GYv6AAG) shows details of the account whose ID is in the URL. The value of QUERY in this case is ?id=001xx000003GYv6AAG.

REQUEST_ID

Type

String

Description

The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.

For example: 3nWgxWbDKWWDIk0FKfF5DV.

`REQUEST_SIZE`**Type**

Number

Description

The size of the request body, in bytes. Value is -1 if the request body content is larger than 2GB, or if the request has no body (for example, a typical GET request).

`REQUEST_STATUS`**Type**

String

Description

The status of the request for a page view or user interface action.

For example:

- **S**—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned.
- **F**—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only.
- **U**—Undefined
- **A**—Authorization Error
- **R**—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page.
- **N**—Not Found. 404 error.

This field can have a blank value.

`REQUEST_TYPE`**Type**

String

Description

The request type.

Possible values are:

- **page**—a normal request for a page
 - **content_UI**—a content request for a page that originated in the user interface
 - **content_apex**—a content request initiated by an Apex call
 - **PDF_UI**—a request for a page in PDF format through the user interface
 - **PDF_apex**—a request for PDF format by an Apex call (usually a Web Service call)
-

`RESPONSE_SIZE`**Type**

Number

	Description The size of the response, in bytes.
RUN_TIME	Type Number
	Description The amount of time that the request took in milliseconds.
SESSION_KEY	Type String
	Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
TIMESTAMP	Type String
	Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime
	Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
URI	Type String
	Description The URI of the page that's receiving the request. For example: /home/home.jsp.
URI_ID_DERIVED	Type ID
	Description The 18-character case insensitive ID of the URI of the page that's receiving the request.

USER_AGENT

Type

Number

Description

The numeric code for the type of client used to make the request (for example, the browser, application, or API).

USER_ID

Type

Id

Description

The 15-character ID of the user who's using Salesforce services through the UI or the API.

For example: 00530000009M943

USER_ID_DERIVED

Type

Id

Description

The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API.

For example: 00590000000I1SNIA0.

USER_TYPE

Type

String

Description

The category of user license.

Possible values are:

- **CsnOnly**—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users.
- **CspLitePortal**—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site.
- **CustomerSuccess**—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal.
- **Guest**—Users whose access is limited so that your customers can view and interact with your site without logging in.
- **PowerCustomerSuccess**—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared

with users below them in the customer portal role hierarchy.

- **PowerPartner**—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site.
- **SelfService**—Users whose access is limited because they're organization customers and access the application through a self-service portal.
- **Standard**—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

VIEW_STATE_SIZE

Type

Number

Description

The size of the Visualforce view state, in bytes.

SEE ALSO:

[EventLogFile Supported Event Types](#)

[EventLogFile](#)

Wave Change Event Type

Wave Change events represent route or page changes made in the CRM Analytics user interface. A Wave Change event type is captured every time the user opens a new CRM Analytics asset or tab, switches between tabs, or changes dashboard pages. Wave Change events are logged when opening new tabs and switching back to previously opened tabs.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field

Details

ANALYTICS_MODE

Type

String

Description

The location in which the dashboard is displayed. In the Salesforce mobile app, embedded dashboards are logged as `embedded` first. When a user interacts with the dashboard, a full-screen dashboard is displayed to allow for user interaction, and is logged as `mobileNative`.

Possible values are:

- `studio`—Analytics Studio
 - `tab`—Analytics tab
-

- `embedded`— Embedded in Aura or Lightning.
- `embeddedInCommunities`— Embedded in Experience Cloud.
- `mobileNative`— CRM Analytics mobile app for iOS/Android or Salesforce mobile app for iOS/Android

`CLIENT_IP`**Type**

String

Description

The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP".

For example: 96.43.144.26.

`CPU_TIME`**Type**

Number

Description

The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.

`EVENT_TYPE`**Type**

String

Description

The type of event. The value is always `WaveChange`.

`IS_MOBILE`**Type**

Boolean

Description

If `true`, the dashboard is displayed in the Tableau CRM mobile app for iOS and Android, in the Salesforce mobile app for iOS and Android, or in a mobile browser.

`IS_NEW`**Type**

Boolean

Description

The field indicates that this action opens a new tab or goes back to a previously opened tab. If the change routes to a new page, the value of this field is true. If it routes to an existing page, this field is false.

`LOGIN_KEY`**Type**

String

	Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: 00D000000000123.
PAGE_CONTEXT	Type String Description The context of the page in which the dashboard is displayed. In the Salesforce mobile app, embedded dashboards are logged as <code>aura</code> first. When a user interacts with the dashboard, a full-screen dashboard is displayed to allow for user interaction, and is logged as <code>iOS</code> or <code>android</code> . Possible values are: • <code>aura</code>—Lightning Components • <code>vf</code>—Visualforce • <code>iOS</code>— CRM Analytics or Salesforce mobile app for iOS • <code>android</code>— CRM Analytics or Salesforce mobile app for Android
PAGE_ID	Type String Description The ID of the CRM Analytics dashboard page. This field is only available in v58.0 and higher.
RECORD_ID	Type String Description The Salesforce ID of the CRM Analytics object.
REOPEN_COUNT	Type Number Description If <code>IS_NEW</code> is false, the number of times that an existing page opens.

REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. For example: 3nWgxWbDKWWDIk0FKfF5DV.
RUN_TIME	Type Number Description The amount of time that the request took in milliseconds.
SAVED_VIEW_ID	Type String Description The ID of the CRM Analytics dashboard saved view.
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
TAB_ID	Type String Description The ID of the particular Analytics tab in the user interface. For example: dashboard-0FKB0000000Ec64GDK.
TIMESTAMP	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime

	Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
TYPE	Type String Description The CRM Analytics object type.
URI	Type String Description The URI of the page that's receiving the request. For example: /home/home.jsp.
URI_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the URI of the page that's receiving the request.
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API. For example: 00590000000I1SNIA0.
VIEW_MODE	Type String Description The view mode for the CRM Analytics asset. Possible values include <code>view</code>, <code>edit</code>, <code>present</code>, <code>json</code>, or <code>print</code>.

WAVE_SESSION_ID

Type

String

Description

The ID of a particular session of CRM Analytics. Use this field to determine which log lines originated from a particular session.

WAVE_TIMESTAMP

Type

Number

Description

The time at which this log line was generated.

SEE ALSO:

[EventLogFile Supported Event Types](#)[EventLogFile](#)

Wave Download Event Type

Wave Download events represent downloads made from lens explorations and dashboard widgets in the CRM Analytics user interface. A Wave Download event type is captured when a user downloads images (.png), Microsoft® Excel® data (.xls), or comma-separated values (.csv) files.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field**Details**

ASSET_ID

Type

ID

Description

The ID of the asset the user downloads from.

ASSET_TYPE

Type

String

Description

The type of the asset the user downloads from.

Values

- **Lens**—A *lens* is a view into a dataset used in an exploratory mode or to get insight to a specific business question. The lens can be saved and shared independently. It can also be clipped to a dashboard.
- **Dashboard**—A *dashboard* is a curated set of charts, metrics, and tables based on the data in one or more lenses.

Field	Details
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". Example 96.43.144.26
CPU_TIME	Type Number Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DATASET_IDS	Type String Description Comma-separated list of IDs of utilized data sets.
DOWNLOAD_ERROR	Type String Description The message for the error blocking the download request, if any.
DOWNLOAD_FORMAT	Type String Description The data format of the export. Values • <code>png</code>—Image • <code>csv</code>—Comma-separated values • <code>xls</code>—Microsoft Excel
EVENT_TYPE	Type String Description The type of event. The value is always <code>WaveDownload</code>.
LOGIN_KEY	Type String

Field	Details
	Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. Example GeJCsym5eyvtEK2l
NUMBER_OF_RECORDS	Type Number Description The number of records exported.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. Example 00D000000000123
REQUEST_ID	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. Example 3nWgxWbDKWWDIk0FKfF5DV
RUN_TIME	Type Number Description The amount of time that the request took in milliseconds.
SESSION_KEY	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. Example d7DEq/ANa7nNZZVD
TIMESTAMP	Type String

Field	Details
	Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
TIMESTAMP_DERIVED	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
URI	Type String Description The URI of the page that's receiving the request. Example /home/home.jsp
URI_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the URI of the page that's receiving the request.
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. Example 005300000009M943
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API. Example 005900000000I1SNIA0
USER_TYPE	Type String

Field	Details
	Description The type of Salesforce user.
WAVE_SESSION_ID	Type String Description The ID of a particular session of CRM Analytics. Use this field to determine which log lines originated from a particular session.
WAVE_TIMESTAMP	Type Number Description The time at which this log line was generated.

Wave Interaction Event Type

Wave Interaction events represent route or page changes made in the CRM Analytics user interface. A Wave Interaction event type is captured when a tab is closed. It also collates the interaction statistics over the life of the tab, including total open time, read time, and so on. These statistics are aggregated as you go to other tabs and return, and logged only once when the tab is closed.

 **Note:** Because Wave Interaction events are logged only when the tab or browser window is closed, these events might not match Wave Change events exactly if a user allows their Salesforce session to time out before closing.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
CPU_TIME	Type Number Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.

EVENT_TYPE	Type String Description The type of event. The value is always <code>WaveInteraction</code> .
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: <code>GeJCsym5eyvtEK2I</code> .
NUM_CLICKS	Type Number Description The number of clicks performed on a page in the CRM Analytics user interface.
NUM_SESSIONS	Type Number Description The number of times a user returned to a particular page.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: <code>00D0000000000123</code> .
READ_TIME	Type Number Description The amount of time a user spent on a particular tab.
RECORD_ID	Type String Description The Salesforce ID of the CRM Analytics object.
REQUEST_ID	Type String

	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code> . For example: 3nWgxWbDKWWDIk0FKfF5DV.
<code>RUN_TIME</code>	Type Number Description The amount of time that the request took in milliseconds.
<code>SESSION_KEY</code>	Type String Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
<code>TAB_ID</code>	Type String Description The ID of the particular Analytics tab in the user interface. Example dashboard-0FKB0000000Ec64GDK
<code>TIMESTAMP</code>	Type String Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
<code>TIMESTAMP_DERIVED</code>	Type DateTime Description The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ). For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.
<code>TOTAL_TIME</code>	Type Number

	Description The total amount of time a tab was open in milliseconds.
TYPE	Type String Description The CRM Analytics object type.
URI	Type String Description The URI of the page that's receiving the request. For example: /home/home.jsp.
URI_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the URI of the page that's receiving the request.
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API. For example: 00590000000I1SNIA0.
VIEW_MODE	Type String Description The view mode for the CRM Analytics asset. Possible values include <code>view</code> , <code>edit</code> , <code>present</code> , <code>json</code> , or <code>print</code> .
WAVE_SESSION_ID	Type String

	Description The ID of a particular session of CRM Analytics. Use this field to determine which log lines originated from a particular session.
WAVE_TIMESTAMP	Type Number Description The time at which this log line was generated.

SEE ALSO:

[EventLogFile Supported Event Types](#)[EventLogFile](#)

Wave Performance Event Type

Wave Performance events help you track trends in your Analytics performance.

For details about event monitoring, see the [Trailhead Event Monitoring module](#) or [REST API Developer's Guide](#).

Fields

Field	Details
CLIENT_IP	Type String Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
CPU_TIME	Type Number Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
EPT	Type Number Description The experienced page time in milliseconds.

EVENT_TYPE	Type String Description The type of event. The value is always WavePerformance.
IS_INITIAL	Type Boolean Description Indicates whether the event is for the initial load of dashboard (<code>true</code>) or not (<code>false</code>).
LOGIN_KEY	Type String Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
NAME	Type String Description The asset title or query string.
ORGANIZATION_ID	Type Id Description The 15-character ID of the organization. For example: 00D0000000000123.
QUERY_ID	Type String Description This field is deprecated in API version 50.0. The number of queries can be determined using the Uri Event type logs, referenced here on page 2425
RECORD_ID	Type String Description The Salesforce ID of the CRM Analytics object.

REQUEST_ID

Type

String

Description

The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.

For example: 3nWgxBbDKWWDIk0FKfF5DV.

RUN_TIME

Type

Number

Description

The amount of time that the request took in milliseconds.

SESSION_KEY

Type

String

Description

The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.

For example: d7DEq/ANa7nNZZVD.

TAB_ID

Type

String

Description

The ID of the particular Analytics tab in the user interface.

Example

dashboard-0FKB0000000Ec64GDK

TIMESTAMP

Type

String

Description

The access time of Salesforce services in GMT.

For example: 20130715233322.670.

TIMESTAMP_DERIVED

Type

DateTime

Description

The access time of Salesforce services in ISO8601-compatible format (YYYY-MM-DDTHH:MM:SS.sssZ).

For example: 2015-07-27T11:32:59.555Z. Timezone is GMT.

TYPE	Type String Description The CRM Analytics object type. This field is scheduled for deprecation in v59.0. Use the new <code>IS_INITIAL</code> field to determine the log line type.
URI	Type String Description The URI of the page that's receiving the request. For example: <code>/home/home.jsp</code> .
URI_ID_DERIVED	Type ID Description The 18-character case insensitive ID of the URI of the page that's receiving the request.
USER_ID	Type Id Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: <code>00530000009M943</code>
USER_ID_DERIVED	Type Id Description The 18-character case insensitive ID of the user who's using Salesforce services through the UI or the API. For example: <code>00590000000I1SNIA0</code> .
VIEW_MODE	Type String Description The view mode for the CRM Analytics asset. Possible values include <code>view</code> , <code>edit</code> , <code>present</code> , <code>json</code> , or <code>print</code> .
WAVE_SESSION_ID	Type String

Description

The ID of a particular session of CRM Analytics. Use this field to determine which log lines originated from a particular session.

WAVE_TIMESTAMP

Type

Number

Description

The time at which this log line was generated.

SEE ALSO:

- [EventLogFile Supported Event Types](#)
- [EventLogFile](#)

EventRelation

Represents a person (a user, lead, or contact) or a resource (such as a conference room) invited to an event. This object lets you add or remove invitees from an event and use the API to manage invitees’ responses to invitations. If Shared Activities is enabled, EventRelation can also represent other objects that are related to an event. EventRelation does not support triggers, workflow, or data validation rules. EventRelation allows a variable number of relationships and handles deleted events differently, depending on whether Shared Activities is enabled.

A non-recurring event can have up to 1,000 invitees. A recurring event can have up to 100 invitees.

If Shared Activities Isn’t Enabled

- EventRelation records only represent invitees (contacts, users, and resources).
- An event can be related to one contact or lead.

If Shared Activities Is Enabled

- EventRelation records can represent:
 - Invitees (IsInvitee= is set to true)
 - OR
 - Related contacts or lead (IsParent is set to true)
- An event can be related to up to 50 contacts or one lead. These people may or may not be invitees. The number of allowed invitees is not affected by the number of related contacts. If a contact or lead is also an invitee, there is one EventRelation record for that person with IsInvitee and IsParent are set to true.
- An event can be related to a lead, contact, resource, account, or opportunity.
- An event can be related to a custom object that has the HasActivities attribute set to true.
- If you delete an event, then relations between the event and any specified contacts, leads, and other records are also deleted.
- If you delete the EventRelation record representing a relation then the corresponding relation field may be cleared on the event.
- If you delete the EventRelation record representing the whoId on an event, then another Who, if any, from the event’s EventWhoIds field will be promoted to the whoId.

- If you restore a deleted event, relations between the event and any specified contacts, leads, and records are also restored. The `WhoId`, `WhatId`, and `AccountId` field values are recalculated using the field values on `EventRelation`.

Whether or not Shared Activities is enabled, an event can be related to one other kind of record, such as an account, an opportunity, or a custom object.

 Note:

- With API versions 26.0 and later, the `EventRelation` object replaces the `EventAttendee` object, and the `EventAttendee` object is no longer visible. You can still query the `EventAttendee` object using packages that support API versions 25.0 and earlier, or by using Apex.
- An `EventRelation` object can't be created for a child event.
- `EventRelation` includes deactivated users.
- In API versions 25.0 and earlier, you can't use `query()`, `delete()`, or `update()` with events related to more than one contact.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
<code>AccountId</code>	Type reference Properties Filter, Group, Nillable, Sort Description Contains the Account ID of the relation. For information on IDs, see ID Field Type. <code>AccountId</code> is visible when Shared Activities is enabled.
<code>EventId</code>	Type reference Properties Create, Filter, Group, Sort Description Contains the ID of the event. This value can't be changed after it's been specified. This is a relationship field. Relationship Name Event Relationship Type Lookup

Field	Details
	Refers To Event
IsDeleted	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
IsInvitee	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the relation is an invitee. • <code>IsInvitee</code> is visible while Shared Activities is being enabled, after it has been enabled, and while it is being disabled. • <code>IsInvitee</code> defaults to <code>true</code> while Shared Activities is being enabled, after it has been enabled, and while it is being disabled if <code>IsInvitee</code>, <code>IsParent</code>, and <code>IsWhat</code> are not set. This configuration ensures compatibility when Shared Activities isn't enabled and EventRelation represents event invitees only. • <code>IsInvitee</code> defaults to <code>false</code> when Shared Activities is enabled if <code>IsParent</code> is set to <code>true</code>.
IsParent	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description <code>IsParent</code> is visible only when Shared Activities is enabled. When <code>false</code> , indicates that the relation is an invitee (a contact, lead, or user). When <code>true</code> , indicates that the relation is a Who or What, as determined by <code>IsWhat</code> field.
IsWhat	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description <code>IsWhat</code> is visible only when Shared Activities is enabled. The value is relevant only if <code>IsParent</code> is <code>true</code> . When <code>IsWhat</code> is <code>true</code> , the relation specified by

Field	Details
	<code>RelationId</code> is a What (an account, opportunity, custom object, etc.). When <code>IsWhat</code> is <code>false</code>, the relation specified by <code>RelationId</code> is a Who (a contact, lead, or user).
<code>RelationId</code>	Type reference Properties Create, Filter, Group, Sort Description Contains the ID of the person (User, Contact, or Lead) or the resource invited to an event. When Shared Activities is enabled, <code>RelationId</code> can also contain the ID of an account, opportunity, or other object related to an event. This value can't be changed after it's been specified. This is a polymorphic relationship field. Relationship Name Relation Relationship Type Lookup Refers To Calendar, Contact, Lead, User
<code>RespondedDate</code>	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Indicates the most recent date and time when the invitee responded to an invitation to an event.
<code>Response</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Contains optional text that the invitee can enter when responding to an invitation to an event.
<code>Status</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description Indicates the invitee status with one of the following values: • New: Invitee has received the invitation but hasn't yet responded. This value is the default. • Declined: Invitee has declined the invitation. • Accepted: Invitee has accepted the invitation.  Note: Uninvited and Maybe aren't currently supported.

Usage

- Invitee related lists display slightly different content. In the Salesforce mobile app, the invitee related list includes invitees only, whereas in the full site, it also includes the event owner. To reproduce the full site functionality in the Salesforce mobile app, use the following API queries.

If you use Shared Activities in your Salesforce org, use this query:

```
SELECT RelationId FROM EventRelation WHERE isInvitee = true AND eventId='[Event_Id]'
```

where *Event_Id* is the child event's ID.

If you don't use Shared Activities, use this query:

```
SELECT RelationId FROM EventRelation WHERE eventId='[Event_Id]'
```

These queries get the main event's relations and display them for the given child event. To further filter the results, add a **WHERE** clause.

Assigning resource attendance status

You can add a resource to an event only when the resource is available. The only attendance status that can be assigned to resources is **Accepted**. Events can't be saved when resources you've added aren't available.

Create an invitee if Shared Activities is enabled (or during the process of enabling it or rolling back)

If the invitee is already a contact or lead, update **IsInvitee** to **true**.

If the invitee is not already a contact or lead, create an **EventRelation** object for the invitee with **IsInvitee** set to **true**.

Create an invitee if Shared Activities is not enabled

Create an **EventRelation** object for the invitee.

Insert a contact or lead relation

```
EventRelation er = new EventRelation(EventId = '00UD0000005zijH',
    RelationId = '003D000000Q8aeV', isParent = true, isInvitee = false);
insert er;
```

Determine what events a given invitee is attending

To determine all the events that a particular person is attending during a given time period (for example, next week), you can have a client application query the **Event** object for a given date range, iterate through the results, and, for each event, query the **EventRelation** object to determine whether the particular person (**RelationId**) has accepted an invitation to that event.

Insert an invitee relation

If `isParent`, `isWhat` and `IsInvitee` are not set, and `RelationId` is a contact, lead, user, or calendar, `IsInvitee` defaults to `true`. This means if an `EventRelation` isn't specifically inserted as a relation to a contact or lead, it's treated as an Invitee relation by default.

```
EventRelation er = new EventRelation(EventId = '00UD0000005zjH',
    RelationId = '003D000000Q8adV');
insert er;
```

Query relations to a contact or a lead

```
List<EventRelation> whoRelations = [SELECT Id, Relation.Name FROM
    EventRelation WHERE EventId = '00UD0000005zjD' AND isParent = true AND isWhat =
    false];
```

Query invitee relations

```
List<EventRelation> inviteeRelations = [SELECT Id, Relation.Name FROM
    EventRelation WHERE EventId = '00UD0000005zjD' AND isInvitee = true];
```

Update an invitee relation to a contact or lead invitee relation

```
EventRelation er = [SELECT Id FROM EventRelation WHERE EventId =
    '00UD0000005zjD' AND isInvitee = true and isParent = false LIMIT 1];
er.isParent = true;
update er;
```

Update a contact or lead relation to a contact or lead invitee relation

```
EventRelation er = [SELECT Id FROM EventRelation WHERE EventId =
    '00UD0000005zjD' AND isParent = true and isInvitee = false LIMIT 1];
er.isInvitee = true;
update er;
```

Reproduce invitee related list functionality in the Salesforce mobile app

Invitee related lists display slightly different content in the Salesforce mobile app and the full site. In the app, the invitee related list includes invitees only, whereas in the full site, it also includes the event owner.

If you use Shared Activities in your Salesforce org, use the following query to reproduce the full site functionality in the Salesforce mobile app:

```
SELECT RelationId FROM EventRelation WHERE isInvitee = true AND eventId='[Event_Id]'
```

where `Event_Id` is the child event's ID.

If you don't use Shared Activities, use this query:

```
SELECT RelationId FROM EventRelation WHERE eventId='[Event_Id]'
```

These queries get the main event's relations and display them for the given child event. To further filter the results, add a `WHERE` clause.

Send email notifications

To send email notifications for a given event, query `EventRelation` for the event, iterate through the list, examine the status, and send email notifications to every person who accepted the invitation.

Syncing Events with Lightning Sync

Attendee statuses (Accepted or Maybe, Declined, or No Response) sync from Microsoft® Exchange or Google to Salesforce, but not from Salesforce to Exchange or Google. Be wary of creating API flows that update attendee status in Salesforce for users set up to sync both ways. Eventually the original Exchange or Google status overrides the update made in Salesforce.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[EventRelationChangeEvent](#) (API version 44.0)

Change events are available for the object.

SEE ALSO:

[Event](#)

[EventWhoRelation](#)

[Overview of Salesforce Objects and Fields](#)

EventBusSubscriber

Represents a trigger, process, or flow that's subscribed to a platform event or a change data capture event. Doesn't include CometD or Pub/Sub API subscribers.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

EventBusSubscriber is read only and can only be queried. As of Summer '20 and later, only your Salesforce org's internal users can access this object.

Fields

Field	Details
ExternalId	Type string Properties Filter, Group, Nillable, Sort Description The ID of the subscriber. For example, the trigger ID.
IsPartitioned	Type boolean

Field	Details
	Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the platform event Apex trigger is configured with parallel subscriptions (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>. See Platform Event Processing at Scale with Parallel Subscriptions for Apex Triggers in the <i>Platform Events Developer Guide</i>. This field is available in API version 62.0 and later.
LastError	Type string Properties Filter, Group, Nillable, Sort Description The error message that the last thrown <code>EventBus.RetryableException</code> contains. This field applies to Apex triggers only. Available in API version 43.0 and later.
LastProcessed	Type string Properties Filter, Group, Nillable, Sort Description The replay ID of the last event that the subscriber processed. This field replaces <code>Position</code> as of API level 66.0.
LastPublished	Type string Properties Filter, Group, Nillable, Sort Description The replay ID of the last published event. This field replaces <code>Tip</code> as of API level 66.0.  Note: For high-volume platform events and change events, the value for <code>Tip</code> isn't available and is always -1.
Name	Type string Properties Filter, Group, Nillable, Sort Description The name of the subscribed item, such as the trigger or process name. If the subscribed item's name is "Process", at least one flow Pause element is subscribed to the event.

Field	Details
Position	Type int Properties Filter, Group, Nillable, Sort Description The replay ID of the last event that the subscriber processed. This field has been deprecated as of API level 66.0 and should no longer be used. Use <code>LastProcessed</code> instead. This field may not be properly represented if the value exceeds the maximum integer size.
Retries	Type int Properties Filter, Group, Nillable, Sort Description The number of times the trigger was retried due to throwing the <code>EventBus.RetryableException</code>. This field applies to Apex triggers only. Available in API version 43.0 and later.
Status	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the status of the subscriber. Can be one of these values: • Error—The subscriber was disconnected and stopped receiving published events. A trigger reaches this state when it exceeds the number of maximum retries with the <code>EventBus.RetryableException</code>. Trigger assertion failures and unhandled exceptions don't cause the error state. We recommend limiting the retries to fewer than nine times to avoid reaching this state. When you fix and save the trigger, or for a managed package trigger, if you redeploy the package, the trigger resumes automatically from the tip, starting from new events. Also, you can resume a trigger subscription in the subscription detail page that you access from the platform event page. • Repartitioning—The system is in the process of modifying the trigger's parallel subscription configuration. • Running—The subscriber is actively listening to events. If you modify the subscriber, the subscription continues to process events. • Suspended—The subscriber is disconnected and can't receive events because a Salesforce admin suspended it or due to an internal error. You can resume a trigger subscription in the subscription detail page that you access from the platform event page. To resume a process, deactivate it and then reactivate it. If you modify the subscriber, the subscription resumes automatically from the tip, starting from new events. For more information, see View and Manage an Event's Subscribers on the Platform Event's Detail Page in the <i>Platform Events Developer Guide</i>.

Field	Details
Tip	Type int Properties Filter, Group, Nillable, Sort Description The replay ID of the last published event. This field has been deprecated as of API level 66.0 and should no longer be used. Use <code>LastPublished</code> instead. This field may not be properly represented if the value exceeds the maximum integer size.  Note: For high-volume platform events and change events, the value for Tip isn't available and is always -1.
Topic	Type string Properties Filter, Group, Nillable, Sort Description The name of the subscription channel that corresponds to a platform event or change event. For a platform event, the topic name is the event name appended with <code>__e</code>, such as <code>MyEvent__e</code>. For a change event, the topic is the name of the change event, such as <code>AccountChangeEvent</code>.
Type	Type string Properties Filter, Group, Nillable, Sort Description The subscriber type (<code>ApexTrigger</code>). If the subscriber is a process or flow Pause element, the type is blank.

Usage

Use `EventBusSubscriber` to query details about subscribers to a platform event. You can get all subscribers for a particular event by filtering on the `Topic` field, as follows.

```
SELECT ExternalId, Name, Position, Status, Tip, Type
FROM EventBusSubscriber
WHERE Topic='Low_Ink__e'
```

EventRelayConfig

Represents the configuration of an event relay, which relays platform events and change data capture events from Salesforce to Amazon EventBridge. This object is available in API version 56.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

- To retrieve or query this object, you must have the View Setup and Configuration permission.
- This object is read-only. To configure an event relay, use [EventRelayConfig](#) in Tooling API or [EventRelayConfig](#) in Metadata API.

Fields

Field	Details
<code>DestinationResourceName</code>	Type string Properties Filter, Group, Sort Description The developer name of the named credential, which stores the AWS account information. The <code>destinationResourceName</code> value contains the <code>callout:</code> prefix. For example: <code>callout:MyRelayNamedCredential</code>
<code>DeveloperName</code>	Type string Properties Filter, Group, Sort Description Required. The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Label is Record Type Name. This field is automatically generated, but you can supply your own value if you create the record using the API.
<code>EventChannel</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The full name of the event channel used in the event relay. For example: <code>MyRelayChannel__chn</code>

Field	Details
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language of the EventRelayConfig. Possible values are: • da—Danish • de—German • en_US—English • es—Spanish • es_MX—Spanish (Mexico) • fi—Finnish • fr—French • it—Italian • ja—Japanese • ko—Korean • nl_NL—Dutch • no—Norwegian • pt_BR—Portuguese (Brazil) • ru—Russian • sv—Swedish • th—Thai • zh_CN—Chinese (Simplified) • zh_TW—Chinese (Traditional)
MasterLabel	Type string Properties Filter, Group, Sort Description Label for the EventRelayConfig. In the UI, this field is Event Relay Config.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The namespace prefix associated with this object. Each Developer Edition organization that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values: - In Developer Edition organizations, the namespace prefix is set to the namespace prefix of the organization for all objects that support it. There is an exception if an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition organization of the package developer. - In organizations that are not Developer Edition organizations, <code>NamespacePrefix</code> is only set for objects that are part of an installed managed package. There is no namespace prefix for all other objects.
RelayOption	Type textarea Properties Nullable Description A JSON-encoded string that contains an option for resuming an event relay after the system recovers from an error. This option is used if the event relay can't resume after the last relayed event. The options available are: <code>{"ReplayRecovery\":\"LATEST\"}</code>—(Default) Start relaying events from new events received in the event bus. Use this option if you aren't interested in missed events while the relay was down. <code>{"ReplayRecovery\":\"EARLIEST\"}</code>—Resend all events stored in the event bus and relay new events thereafter. The event bus stores events for up to three days. Use this option if you want to reprocess all stored events and catch up on missed events.
State	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The execution state of the event relay. Possible values are: <code>RUN</code>—The event relay is running and actively relaying event messages from Salesforce to Amazon EventBridge. <code>PAUSE</code>—An administrator paused the event relay. No events are relayed to Amazon EventBridge during this status. All current state information is saved. <code>STOP</code>—(Default) The event relay is stopped and no events are relayed to Amazon EventBridge. All current state information is deleted.

Field	Details
UsageType	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Reserved for future use.

EventRelayFeedback

Represents execution state information about an event relay from Salesforce to Amazon EventBridge for platform events and change data capture events. Query this object to get information such as the event relay status and any error message. This object is available in API version 56.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
ErrorCode	Type string Properties Filter, Group, Nillable, Sort Description The error code of the last error that occurred during the relay of event messages. For a list of possible error codes and messages, see Error Codes .
ErrorIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The identifier of an unexpected system error that occurred during the relay of event messages.
ErrorMessage	Type textarea Properties Nillable

Field	Details
	Description The error message of the last error that occurred during the relay of event messages. For a list of possible error codes and messages, see Error Codes.
ErrorTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time in the UTC time zone when the last error occurred during the relay of event messages.
EventRelayConfigId	Type reference Properties Filter, Group, Sort Description The ID of the event relay configuration that this feedback record is collecting the execution information of. This field is a relationship field. Relationship Name EventRelayConfig Relationship Type Lookup Refers To EventRelayConfig
EventRelayNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The number that identifies the EventRelayFeedback record. This field is of type Auto Number.
LastRelayedEventTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time in the UTC time zone when the last event was relayed to Amazon EventBridge.

Field	Details
RemoteResource	Type string Properties Filter, Group, Nillable, Sort Description The name of the partner event source associated with the event relay. It is in the format <code>aws.partner/salesforce.com/orgID/channelID</code>. For example: <code>aws.partner/salesforce.com/00DRM000000Fxts2AC/0YLRM0000004Dfg4AE</code>.
Status	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The status of the event relay. Possible values are: • ERROR— The event relay encountered an error while running or during a state change that the administrator initiates. During the ERROR state, no events are relayed to Amazon EventBridge. The system attempts periodically to recover from the error. If it succeeds, the Status field value changes to RUNNING or to the new state that the administrator selected. The event relay attempts to resume sending events from the event bus from where it left off. In rare occasions, if it can't resume after the last relayed event, it uses the error recovery option in the relayOption field of EventRelayConfig to determine where to resume from. • DELETED—Reserved for future use. • PAUSED— An administrator paused the event relay. No events are relayed to Amazon EventBridge during this status. When an administrator resumes the event relay, events are relayed from the last position in the event bus, as long as they're within the retention window. • RUNNING— The event relay is running and actively relaying events from Salesforce to Amazon EventBridge. • STOPPED—The event relay is stopped and no events are relayed to Amazon EventBridge. Some state information stored in EventRelayFeedback fields is deleted, such as LastRelayedEventTime and error fields. When the event relay is resumed, only new events are relayed. The default value is STOPPED.
UsageType	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description Reserved for future use.

Error Codes

This table contains the error codes and messages that a query on `EventRelayFeedback` can return in the `ErrorCode` and `ErrorMessage` fields.

Error Code	Error Description
<code>sfdc.platform.eventbus.relay.aws.partner.eventsource.invalid</code>	The configured event relay's AWS named credentials are invalid.
<code>sfdc.platform.eventbus.relay.aws.partner.eventsource.connect.error</code>	The configured event relay encountered an error while connecting to Amazon EventBridge.
<code>sfdc.platform.eventbus.relay.feature.not.supported</code>	The event relay is configured with an unsupported feature, such as event encryption and change data capture event enrichment.
<code>sfdc.platform.eventbus.relay.event.delivery.limit.error</code>	You've exceeded the event delivery limit for your org.
<code>sfdc.platform.eventbus.relay.temporarily.unavailable</code>	The event relay is temporarily unavailable due to an internal error.

EventStagedInviteeEmail

Represents the relationship between an event and an email address invited to the event that doesn't match to a user, contact, or lead record. Data about the unmatched email address is represented in `StagedInviteeEmail`. This object represents event-related details, such as the invitee's attendance response to the event. This object is available in API version 66.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`

Special Access Rules

This object is available with Einstein Activity Capture when Sync Email as Salesforce Activity is turned on.

Fields

Field	Details
EventId	Type reference Properties Filter, Group, Sort Description The unique ID of the related event record. This field is a relationship field. Relationship Name Event Refers To Event
IsArchived	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the event is archived (<code>true</code>) or not (<code>false</code>). This value helps manage high volumes of archived events, improving query performance. The default value is <code>false</code>.
IsOrganizer	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the invitee is the event organizer (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The invited email address.
StagedInviteeEmailId	Type reference

Field	Details
	Properties Filter, Group, Sort Description The unique ID of the related invitee email address record. This field is a relationship field. Relationship Name StagedInviteeEmail Relationship Type Master-detail Refers To StagedInviteeEmail
Status	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort, Update Description The attendance response to the event from the invitee. Possible values are: - Accepted - Declined - Maybe - New - Uninvited

EventTag

Associates a word or short phrase with an Event.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
ItemId	Type reference

Field Name	Details
	Properties Create, Filter Description ID of the tagged item.
Name	Type string Properties Create, Filter Description Name of the tag. If this value does not already exist, a new TagDefinition is created and becomes the parent of this Tag object. Otherwise, a TagDefinition with the same name becomes the parent of this Tag object. Parent relationships are created automatically.
TagDefinitionId	Type reference Properties Filter Description ID of the parent TagDefinition object that owns the tag.
Type	Type picklist Properties Create, Filter, Restricted picklist Description Defines the visibility of a tag. Valid values: • Public—The tag can be viewed and manipulated by all users in an organization. • Personal—The tag can be viewed or manipulated only by a user with a matching OwnerId.

Usage

EventTag stores the relationship between its parent TagDefinition and the Event being tagged. Tag objects act as metadata, allowing users to describe and organize their data.

When a tag is deleted, its parent TagDefinition will also be deleted if the name is not being used; otherwise, the parent remains. Deleting a TagDefinition sends it to the Recycle Bin, along with any associated tag entries.

EventWhoRelation

Represents the relationship between an event and a lead or contacts. This derived object is a filtered version of the [EventRelation](#) on page 2453 object; that is, `IsParent` is `true` and `IsWhat` is `false`. It doesn't represent relationships to invitees or to accounts, opportunities, or other objects. This object is available in API versions 29.0 and later.

EventWhoRelation allows a variable number of relationships: one lead or up to 50 contacts. Available only if you've enabled Shared Activities for your organization.

 **Note:** EventWhoRelation objects aren't created for child events.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
EventId	Type reference Properties Filter, Group, Nillable, Sort Description Indicates the ID of the event.
RelationId	Type reference Properties Filter, Group, Nillable, Sort Description Indicates the ID of the contacts or lead related to the event.
Type	Type string Properties Filter, Group, Nillable, Sort Description Indicates whether the person related to the event is a contact or lead.

Usage

Apex example that queries relations to a contact or lead

```
List<EventWhoRelation> whoRelations = [SELECT Id, Relation.Name FROM
EventWhoRelation WHERE EventId = '00UD0000005z1jD'];
```

SEE ALSO:

- [Event](#)
- [EventRelation](#)

Expense

Represents an expense linked to a work order. Service resource technicians can log expenses, such as tools or travel costs. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the account associated with the linked work order.
Amount	Type currency Properties Create, Filter, Sort, Update Description The amount of the expense.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description Available only if the multicurrency feature is enabled. Contains the ISO code for any currency allowed by the organization.
Description	Type textarea Properties Create, Nillable, Update Description A description for the expense.
Discount	Type percent Properties Create, Filter, Nillable, Sort, Update Description The percentage deducted from the <code>Subtotal</code> price. Available in version 51.0 and later.
ExpenseEndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description If the expense was incurred over multiple days, the Expense End Date is the last day that the expense covers.
ExpenseNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The number that uniquely identifies the expense.
ExpenseStartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description If the expense was incurred over multiple days, the Expense Start Date is the first day that the expense covers.

Field	Details
ExpenseType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The type of expense. Possible values are: • Billable • Non-Billable The default value is Billable.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who owns the expense record.
Quantity	Type double Properties Create, Filter, Nillable, Sort, Update Description The number of items purchased in this record. Available in version 51.0 and later.
Subtotal	Type currency

Field	Details
	Properties Filter, Nillable, Sort Description The subtotal price calculated as the product of <code>Quantity</code> and <code>UnitPrice</code>. Available in version 51.0 and later. This is a calculated field.
Title	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A title that identifies the expense. This field is available in API version 50.0 and later.
TotalPrice	Type currency Properties Filter, Nillable, Sort Description The total price of the transaction which is equal to the discounted subtotal: <code>Subtotal - (Discount * Subtotal)</code>. Available in version 51.0 and later. This is a calculated field.
TransactionDate	Type date Properties Create, Filter, Group, Sort, Update Description The day that the expense was incurred, or the payment date for the expense.
UnitPrice	Type currency Properties Create, Filter, Nillable, Sort, Update Description The price of one item on the record. Available in version 51.0 and later.
WorkOrderId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The ID of the work order associated with the expense.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

ExpenseChangeEvent (API version 55.0)

Change events are available for the object.

ExpenseFeed

Feed tracking is available for the object.

ExpenseHistory

History is available for tracked fields of the object.

ExpenseOwnerSharingRule

Sharing rules are available for the object.

ExpenseShare

Sharing is available for the object.

ExpenseReport

Represents a report that summarizes expenses. This object is available in API version 50.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
CurrencyIsoCode	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description Available only if the multicurrency feature is enabled. Contains the ISO code for any currency allowed by the organization.

Field	Details
Description	Type textarea Properties Create, Nillable, Update Description A description for the expense report.
ExpenseReportNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-generated number identifying the expense report.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who owns the expense report record.
Title	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description A title that identifies the expense report.
TotalExpenseAmount	Type currency Properties Filter, Nillable, Sort Description The sum of all expense entries in the report. This is a calculated field.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[ExpenseReportFeed](#)

Feed tracking is available for the object.

[ExpenseReportHistory](#)

History is available for tracked fields of the object.

[ExpenseReportShare](#)

Sharing is available for the object.

ExpenseReportEntry

Represents an entry in an expense report. This object is available in API version 50.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Amount	Type currency Properties Filter, Nillable, Sort Description The amount of the expense.

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only if the multicurrency feature is enabled. Contains the ISO code for any currency allowed by the organization.
ExpenseId	Type reference Properties Create, Filter, Group, Sort, Update Description The expense that corresponds to the expense report entry.
ExpenseReportEntryNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-generated number identifying the expense report entry.
ExpenseReportId	Type reference Properties Create, Filter, Group, Sort Description The expense report that's associated with the expense report entry.
ExpenseType	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Sort Description The type of expense. Possible values are: • Billable • Non-Billable The default value is Billable.
LastReferencedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Title	Type string Properties Filter, Group, Nillable, Sort Description A title that identifies the expense.
TransactionDate	Type date Properties Filter, Group, Nillable, Sort Description The day that the expense was incurred, or the payment date for the expense.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[ExpenseReportEntryFeed](#)

Feed tracking is available for the object.

[ExpenseReportEntryHistory](#)

History is available for tracked fields of the object.

ExpressionFilter

Represents a logical expression that's used to control the execution of macro instructions. This object is available in API version 46.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ContextId	Type reference Properties Create, Filter, Group, Sort Description Required. The ID of the MacroInstruction object that contains the expression.
FilterConditionLogic	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Optional. The filter conditions to use and the order in which to apply them. For example, '1 AND 2' evaluates condition 1 and then condition 2.
FilterDescription	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Optional. A description of the filter expression that helps to explain the logic to users. For example, 'Applies to New cases.'
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Optional. A label for the expression.

Usage

The ExpressionFilter object is used with the `IF` and `ELSEIF` operations in a [MacroInstruction](#). It lets you specify a logical expression that determines whether macro instructions are executed. The object indicates whether any or all conditions must be true.

To represent the conditions that are evaluated, this object uses one or more [ExpressionFilterCriteria](#) child objects. The ExpressionFilter to be used with each criteria is specified in the ExpressionFilterCriteria's ExpressionFilterId field.

For example, to represent the following conditional statement, the ExpressionFilter object specifies the FilterConditionLogic field as 1 AND 2, where 1 and 2 are ExpressionFilterCriteria objects. In this example, condition 1 is Case.Status EQUALS New, and condition 2 is Case.Origin EQUALS Phone.

```
IF (Case.Status EQUALS New) AND (Case.Origin EQUALS Phone)
    Select Email QuickAction
    Set Subject...
    Set To...
    Set Body...
    Submit
ENDIF
```

ExpressionFilterCriteria

Represents a condition in an expression that's used to control the execution of macro instructions. This object is available in API version 46.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ExpressionFilterId	Type reference Properties Create, Filter, Group, Sort Description Required. The ID of the ExpressionFilter object that references this condition.
FilterTarget	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Required. The target object or field used in the condition. For example, to create a condition that applies to new cases, use Case.Status as the FilterTarget.
FilterTargetValue	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Optional. The value that's compared to the value of the FilterTarget. For example, to create a condition that applies to new cases, use <code>New</code> as the <code>FilterTargetValue</code>.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Optional. A label for the condition.
Operation	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Required. Specifies the operator used to compare the target field and the target value. For example, to create a condition that applies to new cases, use <code>EQUALS</code> for the <code>Operation</code> field, as in <code>Case.Status EQUALS New</code>. • <code>EQUALS</code> • <code>NOTEQUALS</code> • <code>CONTAINS</code> • <code>NOTCONTAIN</code>
SortOrder	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Required. The order in which the criteria are evaluated.

Usage

ExpressionFilterCriteria is a child object of the [ExpressionFilter](#) object. Use these objects with the `IF` and `ELSEIF` operations in a [MacroInstruction](#) to control instruction execution. Each condition in a ExpressionFilterCriteria compares a target object or field to a value using a condition operator; for example, `Case.Status EQUALS New`.

ExpressionSetConstraintObj

Represents the association between a Product object and the constraint model tags defined in a given constraint model. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available in orgs where Revenue Cloud is enabled.

Fields

Field	Details
ConstraintModelTag	Type string Properties Create, Filter, Group, Sort, Update Description The product tag that is defined in the constraint model, for example, Laptop.
ConstraintModelTagType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The type of the product tag that is defined in the constraint model. Possible values are: - Port - Type The default value is Type.
ExpressionSetId	Type reference Properties Create, Filter, Group, Sort, Update Description The expression set associated with the expression set constraint object. This field is a relationship field.

Field	Details
	Relationship Name ExpressionSet Refers To ExpressionSet
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user accessed this record or list view (LastReferencedDate) but didn't view it.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the expression set constraint.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description For internal use only. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User

Field	Details
ReferenceObjectId	Type reference Properties Create, Filter, Group, Sort, Update Description The object associated with the expression set constraint object. This field is a polymorphic relationship field. Relationship Name ReferenceObject Refers To Product2, ProductClassification, ProductRelatedComponent

ExtConvParticipantIntegDef

Represents the integration configuration for external conversation participants, used for communication between Salesforce and external messaging platforms. This object is available in API version 66.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
AccountKey	Type textarea Properties Create, Nillable, Update Description Encrypted JSON format key for secure storage of authentication credentials for external bot API calls.
BotProvider	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Bot provider for integration of authentication and request and response logic. Possible value:

Field	Details
	• Custom
ChannelMode	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Possible values for the type of channel: • Messaging • Voice The default value is Messaging.
ClientIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description API client ID of the bot provider.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description Unique name of the object in the API.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Language of the master label.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Label for the ExtConvParticipantIntegDef object.

Field	Details
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description If it's part of a managed package, the namespace of the package that contains integration definition for the external conversation participant.
ProjectIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Identifier of the project in the provider framework to scope API calls and resource access.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Status of the integration. Possible values are: • Active • Deleted • Inactive The default value is <code>Active</code>.

ExtDataShare

Represents a data share, which is a collection of Data Cloud objects that can be shared with other Data Cloud orgs or third-party partners. This object is available in API version 56.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
DataShareType	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The type of data share, indicating the direction of data flow. If <code>Outbound</code>, the data share was created on this Data Cloud org and is shared to third-party partners or with another Data Cloud org. If <code>Inbound</code>, the data share comes from another Data Cloud org and is shared to this Data Cloud org. Possible values are: • <code>Inbound</code> • <code>Outbound</code> The default value is <code>Outbound</code>.
DataSpaceId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the data space under which the data share was created. This field is a relationship field. Relationship Name DataSpace Refers To DataSpace
InboundDataShareName	Type string Properties Create, Filter, Group, Nillable, Sort Description The name of the data share in the source Data Cloud org.
InboundDataShareOrgIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort Description The ID of the source Data Cloud org that shared a data share with the target org.

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, and LastReferenceDate is not null, the user accessed this record or list view indirectly.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the data share.
ObjectCount	Type int Properties Filter, Group, Nillable, Sort Description The number of Data Cloud objects added to this data share.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ExtDataShareChangeEvent](#) on page 68

Change events are available for the object.

[ExtDataShareFeed](#) on page 55

Feed tracking is available for the object.

[ExtDataShareHistory](#) on page 63

History is available for tracked fields of the object.

ExtDataShareOwnerSharingRule on page 65

Sharing rules are available for the object.

ExtDataShareShare on page 67

Sharing is available for the object.

SEE ALSO:

[Salesforce Help: Create a Data Stream](#)

ExternalAccountHierarchy

Represents the external account hierarchy, which works like a role-based hierarchy. Use ExternalAccountHierarchy to allow partner and customer users to share data with other external accounts in their hierarchy.This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You must have a Partner or Customer Community Plus license.

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Sort Description The ID of the account in the external account hierarchy.
CurrencyISOCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Possible values are: • GBP— British Pound • USD— U.S. Dollar The default value is USD.

Field	Details
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the external account hierarchy.
HierarchyType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort Description Possible values are: • CustomerPortal — Customer • Partner The default value is Partner.
IsAccessibleToParent	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Allows data to be shared with parent account in the account hierarchy. The default value is true.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description When true, the hierarchy is turned on. The default value is false.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the external account hierarchy.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the account owner.
ParentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the parent account.

ExternalAccountHierarchyHistory

Represents the history of changes to values in the fields of an external account hierarchy. This object is available in API version 50.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Special Access Rules

You must have a Partner or Customer Community Plus license.

Fields

Field	Details
DataType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Possible values are: • Address • AnyType • AutoNumber • Base64 • BitVector • Boolean • Content • Currency • DataCategoryGroupReference • DateOnly • DateTime • Division • Double • DynamicEnum • Email • EncryptedBase64 • EncryptedText • EntityId • EnumOrId • ExternalId • Fax • File • HtmlMultiLineText • HtmlStringPlusClob • InetAddress • Json • Location • MultiEnum • MultiLineText • Namespace • Percent

Field	Details
	• PersonName • Phone • Raw • RecordType • SfdcEncryptedText • SimpleNamespace • StringPlusClob • Switchable_PersonName • Text • TimeOnly • Url • YearQuarter
ExternalAccountHierarchyId	Type reference Properties Filter, Group, Sort Description The ID of the external account hierarchy.
Field	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Possible values are: • Account • HierarchyType - Hierarchy Type • IsAccessibleToParent - Is Accessible to Parent • IsActive - Is Hierarchy Active • Name • Owner • Parent • Created - Created. • FeedEvent - Feed Event • IndividualMerged - Individual Merged • Locked - Record Locked • OwnerAccepted - Owner (Accepted) • OwnerAssignment - Owner (Assignment)

Field	Details
	• Unlocked - Record unlocked
NewValue	Type anyType Properties Nillable, Sort Description The updated value of the changed field.
OldValue	Type anyType Properties Nillable, Sort Description The previous value of the changed field.

ExternalClientApplication

For internal use only.

ExternalDataSource

Represents an external data source, which defines connection details for integration with data and content that are stored outside the Salesforce org. This object is available in API version 27.0 and later.



Note: All credentials stored within this entity are encrypted under a framework that is consistent with other encryption frameworks on the platform. Salesforce encrypts your credentials by auto-creating org-specific keys. Credentials encrypted using the previous encryption scheme have been migrated to the new framework.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

From API version 48.0 onwards, only authenticated internal and external users can access this object.

Fields

Field Name	Details
AuthProviderId	Type reference Properties Filter, Group, Nillable, Sort Description Salesforce ID of the authentication provider, which defines the service that provides the login process and approves access to the external system. Only users with the “Customize Application” and “Manage AuthProviders” permissions can view this field. This field is available in API version 39.0 and later. This is a relationship field. Relationship Name AuthProvider Relationship Type Lookup Refers To AuthProvider
CustomConfiguration	Type textarea Properties Nillable Description A JSON-encoded configuration string that defines parameters specific to the type of external data source.
DeveloperName	Type string Properties Filter, Group, Sort Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object’s name in a managed package and the changes are reflected in a subscriber’s organization.

Field Name	Details
	 Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance may slow while Salesforce generates one for each record.
Endpoint	Type textarea Properties Nillable Description The URL of the external system, or if that URL is defined in a named credential, the named credential URL. A named credential URL contains the scheme <code>callout:</code>, the name of the named credential, and an optional path. For example: <code>callout:My_Named_Credential/some_path</code>. You can append a query string to a named credential URL. Use a question mark (?) as the separator between the named credential URL and the query string. For example: <code>callout:My_Named_Credential/some_path?format=json</code>.
isWritable	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Lets the Lightning Platform and users in this org create, update, and delete records for external objects associated with the external data source. The external object data is stored outside the org. By default, external objects are read only. Available only for Salesforce Connect external data sources. Available in API version 35.0 and later. However, with the cross-org adapter for Salesforce Connect, you can set this field to <code>true</code> only in API version 39.0 and later.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language of the <code>MasterLabel</code>.
MasterLabel	Type string Properties Filter, Group, Sort Description Master label for the external data source. This internal label doesn't get translated.

Field Name	Details
NamedCredentialId	Type reference Properties Filter, Group, Nillable, Sort Description The Salesforce ID of the referenced named credential for an external data source. Required for Salesforce Connect adapters for Amazon DynamoDB, Amazon Athena, GraphQL, and OData 4.01. For connecting to other external data sources, the field must be null. This field is available in API version 58.0 and later. This is a relationship field. Relationship Name NamedCredential Relationship Type Lookup Refers To NamedCredential
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation.
PrincipalType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Specifies whether the org uses one set (NamedUser), multiple sets (PerUser), or no (Anonymous) credentials to access the external system. Each set of credentials corresponds to a login account on the external system. Corresponds to <code>Identity Type</code> in the user interface.
Protocol	Type picklist Properties Filter, Group, Restricted picklist, Sort

Field Name	Details
	Description Specifies whether to use OAuth, password authentication, or no authentication to access the external system. Some types of external data sources support only one value. - For cloud-based Files Connect external systems, select OAuth 2.0. - For on-premises systems, select Password Authentication. - For Simple URL data sources, select No Authentication. Additional authentication protocols are supported for the Amazon DynamoDB, Amazon Athena, Snowflake, GraphQL, and OData 4.01 external data sources. - AwsSv4 - Basic - Custom - Jwt - JwtExchange
Repository	Type string Properties Filter, Group, Nillable, Sort Description Used for SharePoint Online. An optional name of the repository in the data source. Not applicable to all data source types.
Type	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Specifies the adapter that connects to the external system.

Usage

Define an external data source to connect to data or content that's stored outside the Salesforce org. Then create external objects, which map to the external system's data and behave similarly to custom objects.



Note: Some external data source fields rely on per-user authentication to connect with an external system. If an admin edits one of these fields, then the previously authenticated credentials can get invalidated, requiring individual users to reauthenticate.

SEE ALSO:

[ExternalDataUserAuth](#)

[NamedCredential](#)

ExternalDataUserAuth

Stores authentication settings for a Salesforce user to access an external system. The external system must be defined in an external data source or a named credential that's configured to use per-user authentication. This object is available in API version 27.0 and later.



Note: All credentials stored within this entity are encrypted under a framework that is consistent with other encryption frameworks on the platform. Salesforce encrypts your credentials by auto-creating org-specific keys. Credentials encrypted using the previous encryption scheme have been migrated to the new framework.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
AuthProviderId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Salesforce ID of the authentication provider, which defines the service that provides the login process and approves access to the external system. Only users with the "Customize Application" and "Manage AuthProviders" permissions can view this field. This field is available in API version 39.0 and later. This is a relationship field. Relationship Name AuthProvider Relationship Type Lookup Refers To AuthProvider
ExternalDataSourceId	Type reference Properties Create, Filter, Group, Sort Description Salesforce ID of the external data source or named credential that defines the external system. This is a polymorphic relationship field.

Field Name	Details
	Relationship Name ExternalDataSource Relationship Type Lookup Refers To ExternalDataSource, NamedCredential
Password	Type textarea Properties Create, Nillable, Update Description Password portion of the credentials for the Salesforce user to access the external system.
Protocol	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies whether to use OAuth, password authentication, or no authentication when the user accesses the external system. Additional authentication protocols are supported for the Amazon DynamoDB, Amazon Athena, Snowflake, GraphQL, and OData 4.01 external data sources. • AwsSv4 • Basic • Custom • Jwt • JwtExchange
UserId	Type reference Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description ID of the Salesforce user who's accessing the external system. This is a relationship field. Relationship Name User Relationship Type Lookup

Field Name	Details
	Refers To User
Username	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Username portion of the credentials for the Salesforce user to access the external system.

Usage

These authentication settings enable a Salesforce user to access an external system. The external system is defined in Salesforce as one of the following.

- External data source—Provides access to external objects, whose data is stored outside the Salesforce organization.
- Named credential—Enables the user's actions to trigger authenticated callouts to the endpoint that's specified in the named credential.

If you grant users access to the external data source or named credential via permission sets or profiles, those users can manage their own authentication settings. See [Store Authentication Settings for External Systems](#) in the Salesforce Help.

SEE ALSO:

[ExternalDataSource](#)

[NamedCredential](#)

ExternalEncryptionRootKey

Represents metadata about root keys stored in third-party key stores that are used to generate and secure keys that encrypt Salesforce data. This object is available in API version 58.0 and later.

Root keys are used to generate data encryption keys (DEKs) in Salesforce, which are in turn used to encrypt and decrypt data. Root keys are also used as wrapping keys to secure DEKs in the Salesforce database.

Supported Calls

`describeSObjects()`, `query()`, `update()`

Special Access Rules

This object is available as part of the Shield and Salesforce Platform Encryption add-on subscriptions. Access to this object also requires the Cache-Only Key Service add-on subscription.

Fields

Field	Details
ActivatedDate	Type dateTime Properties Filter, Nillable, Sort, Update Description The date the key was activated in Salesforce.
CreatedBy	Type string Properties Filter, Group, Nillable, Sort, Update Description The email address of the user who created the root key. For example, <code>user@example.com</code>.
Description	Type string Properties Filter, Group, Nillable, Sort, Update Description The user-defined description of the root key.
LastModifiedBy	Type string Properties Filter, Group, Nillable, Sort, Update Description The email address of the user who most recently modified the key. For example, <code>user@example.com</code>.
Region	Type string Properties Filter, Group, Nillable, Sort, Update Description The region for the customer managed key. For example, if the <code>RootKeyService</code> is <code>AWS</code>, the region is an Amazon Web Services (AWS) region such as <code>us-east1</code>.
RootKeyIdentifier	Type string

Field	Details
	Properties Filter, Nillable, Sort, Update Description The unique key identifier from the external KMS, such as an AWS Amazon Resource Name (ARN). For example, arn:aws:kms:us-west-2:123456789000:key/123ab456-7cd8-9012-3e4f-5gh678i901j2
RootKeyService	Type string Properties Filter, Group, Nillable, Sort, Update Description The external key management service connected to Salesforce. For example, AWS.
Status	Type string Properties Filter, Group, Nillable, Sort, Update Description The status of the key. This is the only value that can be changed using update(). You can only change the status from Active to Inactive, or from Inactive to Active. Possible values are: • Activation Pending—Salesforce is waiting for confirmation of a valid key policy in the external key store. • Active—Can be used to encrypt new DEKs and decrypt existing DEKs. • Archived—Can't encrypt new DEKs. Can be used to decrypt previously created DEKs. • Canceled—Root key activation canceled by a user. • Inactive—The root key, and the DEKs that it encrypts, are inaccessible. Inaccessible DEKs can't be used to decrypt data, which renders that data also inaccessible. • Unavailable—The root key, and the DEKs that it encrypts, cannot be accessed. The root key has been removed or deactivated by the managing KMS.

Usage

Three functions are available: `describeObjects()`, `query()`, and `update()`

Use your preferred developer environment to run the examples. Use the Salesforce developer [Introduction to REST API](#) for basic information on making REST calls into Salesforce. Also, [Introducing the Salesforce Shield Platform Encryption REST API](#) gives you starter information on using REST to work with Shield Platform Encryption.

Describe an external root key with `describeSObjects ()`

To get information about the ExternalEncryptionRootKey sObject, use `describe`.

```
curl --location 'https://DOMAIN.my.salesforce.com/services/data/v62.0/sobjects/' \
  ExternalEncryptionRootKey/describe'
--header 'Content-Type: application/json' \
--header 'Authorization: Bearer TOKEN'
```

On success, the response is the full JSON description of the ExternalEncryptionRootKey sObject.

Get info on an external root key with `query ()`

To get information about a specific root key, use `query` on the ExternalEncryptionRootKey sObject. Use the Identifier value as listed on the Key Management Page for the root key Id in the WHERE clause.

```
curl --location 'https://DOMAIN.my.salesforce.com/services/data/v62.0/query?' \
  ?q=SELECT+FIELDS (ALL) +FROM+ExternalEncryptionRootKey+WHERE+Id='48q001t5ddzbucnAAA'+\
--header 'Content-Type: application/json' \
--header 'Authorization: Bearer TOKEN'
```

On success, the response is be similar to

```
{
  "totalSize": 1,
  "done": true,
  "records": [
    {
      "attributes": {
        "type": "ExternalEncryptionRootKey",
        "url":
"/services/data/v62.0/sobjects/ExternalEncryptionRootKey/48q001t5ddzbucnAAA"
      },
      "Id": "48q001t5ddzbucnAAA",
      "RootKeyIdentifier": "97ee8238-c5ac-4320-a2d0-a728aaefd567",
      "CreatedDate": "2024-08-05T17:32:11.841+0000",
      "CreatedBy": "charley.t.pulasky@wise-raccoon-odlly6.com",
      "LastModifiedDate": "2025-02-12T18:36:11.063+0000",
      "LastModifiedBy": "charley.t.pulasky@wise-raccoon-odlly6.com",
      "RootKeyService": "SF",
      "Region": "KEY REGION",
      "Status": "Active",
      "Description": null,
      "ActivatedDate": null
    }
  ]
}
```

Update Status on an external root key with `update ()`

To update the status of an ExternalEncryptionRootKey from Active to Inactive, or from Inactive to Active, use PATCH on the specific key object. Use the vaule for `Identifier` as listed on the Key Management Page for the root key identifier.

```
curl --location --request PATCH
'https://DOMAIN.my.salesforce.com/services/data/v62.0/sobjects/ExternalEncryptionRootKey/ROOTKEYIDENTIFIER' \
--header 'Content-Type: application/json' \
```

```
--header 'Authorization: Bearer TOKEN'\n--data '{\n  "Status": "Active"\n}'
```

On success, the response is be similar to I SEE NO RESPONSE.

ExternalEvent

Holds native iOS or Android calendar event details for the Salesforce Today feature in the Salesforce mobile app. This object is available in API version 35.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The Salesforce Today app is available in Salesforce for Android and Salesforce for iOS. It's not available in the Salesforce desktop site. Access to Today is available only if you grant Calendar permission to the Salesforce mobile app.

Fields

Field	Details
ExternalId	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the external event.
Location	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The site where the external event takes place.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort

Field	Details
	Description The name of the external event's organizer.
Notes	Type textarea Properties Create, Nillable, Update Description Additional details about the external event.
Time	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The time the external event is held.
Title	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The title of the external event.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ExternalChangeEvent](#) on page 68

Change events are available for the object.

ExternalEventMapping

Holds native iOS or Android calendar event details for the Salesforce Today feature in the Salesforce mobile app. This object is available in API version 35.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The Salesforce Today app is available in Salesforce for Android and Salesforce for iOS. It's not available in the Salesforce desktop site. Access to Today is available only if you grant Calendar permission to the Salesforce mobile app.

Fields

Field	Details
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date the external event ends.
EventId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the Salesforce event created by the external event. This field is a relationship field. Relationship Name Event Refers To Event
ExternalId	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The ID of the external event.
IsLocked	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Returns <code>true</code> if the external event is locked, or <code>false</code> if it's not. The default value is <code>false</code>.

Field	Details
IsRecurring	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the external event is recurring (true) or not (false). The default value is <code>false</code>.
MayEdit	Type boolean Properties Defaulted on create, Filter, Group, Sort Indicates whether the external event can be edited (true) or not (false). The default value is <code>false</code>.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the external event's organizer.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the creator of the external event. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
StartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date the external event begins.

ExternalSocialAccount

Represents a managed social media account on a social network such as Facebook or Twitter. This object is available in API version 29.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
AuthorizedBy	Type string Properties Filter, Group, Nillable, Sort Description Name of the Radian6 user who added the social account to Radian6.
DataSourceId	Type string Properties Filter, Group, Nillable, Sort Description ID of the Radian6 data source for the social account.
DefaultResponseAccountId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the managed social account to use by default when responding. This is a relationship field. Relationship Name DefaultResponseAccount Relationship Type Lookup Refers To ExternalSocialAccount
DeveloperName	Type string

Field Name	Details
	Properties Filter, Group, Sort Description The unique name of the record in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. This field is automatically generated but you can supply your own value if you create the record using the API.  Note: When creating large sets of data, always specify a unique DeveloperName for each record. If no DeveloperName is specified, performance may slow while Salesforce generates one for each record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
ExternalAccountId	Type string Properties Filter, Group, Sort Description ID of the social account on the social network.
ExternalPictureURL	Type url Properties Filter, Group, Nillable, Sort Description URL to the picture of the social account on the social network.
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Specifies whether the social account is active or not.
IsAuthenticated	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Specifies whether the social account is authenticated or not.

Field Name	Details
IsCaseCreationEnabled	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Specifies whether case creation for the social account is enabled or not.
IsDataSourceActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Specifies whether the data source is active or not.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Specifies the language of the social account.
MasterLabel	Type string Properties Filter, Group, Sort Description Master label for the social account. This display value is the internal label and does not get translated.
ProfileUrl	Type url Properties Filter, Group, Nillable, Sort Description URL for the profile.
Provider	Type picklist Properties Filter, Group, Restricted picklist, Sort

Field Name	Details
	Description Social network, such as Facebook or Twitter, of the social account.
ProviderUserId	Type string Properties Filter, Group, Sort Description User ID for the social network of the social account.
RuleId	Type string Properties Filter, Group, Nillable, Sort Description ID of the Radian6 rule for the account.
SocialPropertyId	Type string Properties Filter, Group, Nillable, Sort Description ID of the Radian6 social property for the account.
TopicId	Type string Properties Filter, Group, Nillable, Sort Description ID of the topic for the social account.
UniqueName	Type string Properties Filter, Group, Nillable, Sort Description Unique name for the social account.
Username	Type string Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description Username for the social account.

Usage

Although available, many of the Radian6-related fields are no longer accurate or used. We recommend using [Social Engagement Resources](#) in *Connect REST API Developer Guide*.

ExtKnowledgeConnector

Represents a connector to a third-party knowledge source for Unified Knowledge. This object is available in API version 60.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Knowledge must be enabled in your org. Salesforce Knowledge users, unlike customer and partner users, must also be granted the Knowledge User feature license.

Fields

Field	Details
<code>IsLocked</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the automated action condition record is locked or not. The default value is <code>false</code> .
<code>LastSyncDate</code>	Type dateTime Properties Filter, Nillable, Sort Description Indicates when the connector last synced with the third-party knowledge source to import articles into Salesforce.

Field	Details
LastSyncStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the status of the connector's last sync of articles from the third-party knowledge source into Salesforce. Possible values are: • <code>articleLimitExceeded</code>—Exceeded article or version limits • <code>completed</code>—Completed • <code>completedWithErrors</code>—Completed with errors • <code>ended</code>—Ended • <code>failed</code>—Failed • <code>initiating</code>—Started • <code>invalidCredentials</code>—Invalid credentials • <code>polling</code>—Polling for Zoomin sync to complete • <code>queued</code>—Queued • <code>syncing</code>—Syncing • <code>timedOut</code>—Timed Out • <code>unavailable</code>—Zoomin unavailable
MayEdit	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the automated import article condition record can be edited or not. The default value is <code>false</code>.
Name	Type string Properties Filter, Group, idLookup, Sort Description The connector's label in Unified Knowledge setup.
NamedCredentialId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description Salesforce ID of the named credential that's used for a request. The named credential identifies the third-party system and the third-party authentication settings. This field is a relationship field. Relationship Name NamedCredential Relationship Type Lookup Refers To NamedCredential
OwnerId	Type reference Properties Filter, Group, Sort Description The user ID of the owner of the connector. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PartnerConnectorIdentifier	Type string Properties Filter, Group, Nillable, Sort Description
ShouldOpenInSource	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether articles imported into Salesforce open in the third-party source from links in Salesforce. The default value is <code>false</code>.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ExtKnowledgeConnectorOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[ExtKnowledgeConnectorShare](#) on page 67

Sharing is available for the object.

ExtlCIntAppOauthPlcyCnfg

For internal use only.

ExtlCIntAppOauthSettings

For internal use only.

ExtlCIntAppPlcyCnfg

For internal use only.

ExtlIntrIdMapping

Represents a mapping between a Salesforce record and its corresponding record in an external system, such as Workday. This object is available in API version 66.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Fields

Field	Details
ExternalIdentifier	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update

Field	Details
	Description The ID of the external event.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the record was last referenced.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the record was last viewed.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the external event's organizer.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the creator of the external event. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
RecordIdentifier	Type string Properties Create, Filter, Group, Sort, Update

Field	Details
	Description The ID of the Salesforce record that is linked to a record in an external system.
RelatedExternalIdentifier	Type string
	Properties Create, Filter, Group, idLookup, Nillable, Sort, Update
	Description The ID of an associated record from the external system that provides additional context for the integration.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ExtlIntrIdMappingOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[ExtlIntrIdMappingShare](#) on page 67

Sharing is available for the object.

ExtlRecShrCnct

Represents authentication data to make outbound calls to and inbound calls from an external system to publish events for Partner Connect. This object is available in API version 62.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`, `update()`

Special Access Rules

To see this object, enable Partner Connect or Partner Connect for Vendors. See [Set Up Partner Connect as a Partner](#) and [Set Up Partner Connect as a Vendor](#) in *Salesforce Help*.

Fields

Field	Details
CnctName	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort, Update Description Name of the connection.
CnctRole	Type picklist Properties Filter, Group, Restricted picklist, Sort Description System's role in the connection. Possible values are: • Partner • Vendor
CnctStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Status of the connection. Possible values are: • Disabled • Enabled • Error • Pending • Unknown
ExternalClientApplicationId	Type reference Properties Filter, Group, Nillable, Sort Description ID of external client app representing your org's connection to the external system. This field is a relationship field. Relationship Name ExternalClientApplication Refers To ExternalClientApplication

Field	Details
ExtlSystem	Type string Properties Filter, Group, idLookup, Nillable, Sort Description ID of the external system.
NamedCredentialId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the named credential. This field is a relationship field. Relationship Name NamedCredential Refers To NamedCredential

ExtlRecShrCnctAcctnt

Represents an association between an account and an external record share connection for Partner Connect. This object is available in API version 62.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

To see this object, enable Partner Connect or Partner Connect for Vendors. See [Set Up Partner Connect as a Partner](#) and [Set Up Partner Connect as a Vendor](#) in *Salesforce Help*.

Fields

Field	Details
AccountId	Type reference

Field	Details
	Properties Filter, Group, Sort Description ID of the account. This field is a relationship field. Relationship Name Account Refers To Account
ExtlRecShrCnctId	Type reference Properties Filter, Group, Sort Description ID of the ExtlRecShrCnct record. This field is a relationship field. Relationship Name ExtlRecShrCnct Refers To ExtlRecShrCnct
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description For internal use only.

ExtlRecShrField

Represents an imported, exported, or updated external record share field for Partner Connect. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To see this object, enable Partner Connect or Partner Connect for Vendors. See [Set Up Partner Connect as a Partner](#) and [Set Up Partner Connect as a Vendor](#) in *Salesforce Help*.

Fields

Field	Details
ExtlRecShrObjectId	Type reference Properties Create, Filter, Group, Sort Description ID of the ExtlRecShrObject record. This field is a relationship field. Relationship Name ExtlRecShrObject Refers To ExtlRecShrObject
FieldDefaultValue	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Default value of the field.
FieldSetType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Set of fields associated with this record. Possible values are: - ExportedFields - ImportedFields - InternalFields
IsFieldNillable	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Indicates whether this field can be set to null (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
SendFieldUpdates	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether updates are tracked for this field, sent to the connected org, and stored in the ExtlRecShrLead or ExtlRecShrOpportunity objects (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
SharedFieldDevName	Type string Properties Create, Filter, Group, Sort Description Developer name of the field.
SharedFieldLabel	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Label of the field.
SharedFieldLength	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Maximum length of the field.
SharedFieldType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Field type of the imported, exported, or updated field. Possible values are:

Field	Details
	• Address • AddressCountry • AddressState • Boolean • Currency • DateOnly • DateTime • Double • DynamicEnum • Email • EntityId • EnumOrId • Fax • Integer • MultiLineText • Percent • Phone • StaticEnum • Text • Url

ExtlRecShrFieldMap

Represents the external record share field mapping between the sender and receiver for Partner Connect. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To see this object, enable Partner Connect or Partner Connect for Vendors. See [Set Up Partner Connect as a Partner](#) and [Set Up Partner Connect as a Vendor](#) in *Salesforce Help*.

Fields

Field	Details
ImportedFieldId	Type reference Properties Create, Filter, Group, Sort Description ID of the ExtlRecShrField record containing the field data sent from the external system. This field is a relationship field. Relationship Name ImportedField Refers To ExtlRecShrField
InternalFieldId	Type reference Properties Create, Filter, Group, Sort Description ID of the ExtlRecShrField record containing the field data received on the internal system. This field is a relationship field. Relationship Name InternalField Refers To ExtlRecShrField

ExtlRecShrLead

Represents the Lead record of a vendor org if you're a partner. If you're a vendor for Partner Connect, this object represents a partner org. This object is available in API version 62.0 and later.

In a related list, the label of this object is Connected External Leads.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

To see this object, enable Partner Connect or Partner Connect for Vendors. See [Set Up Partner Connect as a Partner](#) and [Set Up Partner Connect as a Vendor](#) in *Salesforce Help*.

Fields

Field	Details
ExtlRecShrCnctId	Type reference Properties Filter, Group, Sort Description ID of the external record share connection. This field is a relationship field. Relationship Name ExtlRecShrCnct Refers To ExtlRecShrCnct
LeadId	Type reference Properties Filter, Group, Sort Description ID of the partner lead. This field is a relationship field. Relationship Name Lead Relationship Type Master-detail Refers To Lead (the master object)
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description For internal use only.

ExtlRecShrObject

Represents a shared object for Partner Connect. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To see this object, enable Partner Connect or Partner Connect for Vendors. See [Set Up Partner Connect as a Partner](#) and [Set Up Partner Connect as a Vendor](#) in *Salesforce Help*.

Fields

Field	Details
DefaultRecordOwnerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the shared record owner. The owner can be a user or a queue, represented by a Group ID. This field is a polymorphic relationship field. Relationship Name DefaultRecordOwner Refers To Group, User
ExtlObjectType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Object type in the external org or system that is part of the object field mapping. Possible values are: - ExtlRecShrLead - ExtlRecShrOpportunity - Lead - Opportunity

Field	Details
ExtlRecShrCnctId	Type reference Properties Create, Filter, Group, Sort Description ID of the external record share connection. This field is a relationship field. Relationship Name ExtlRecShrCnct Refers To ExtlRecShrCnct
FieldMapStatus	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Exporter's status of the field mapping. Possible values are: • ActiveMapping • Selected • SystemOverride
InternalObjectType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Object type in your org or system used to group field selections and field mappings. Possible values are: • ExtlRecShrLead • ExtlRecShrOpportunity • Lead • Opportunity

ExtlRecShrOpportunity

Represents the opportunity for Partner Connect in the vendor org if you're a partner and the partner org if you're the vendor. This object is available in API version 62.0 and later.

The label of this object in the related list is Connected External Leads.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

To see this object, enable Partner Connect or Partner Connect for Vendors. See [Set Up Partner Connect as a Partner](#) and [Set Up Partner Connect as a Vendor](#) in *Salesforce Help*.

Fields

Field	Details
ExtlRecShrCnctId	Type reference Properties Filter, Group, Sort Description ID of the external record share connection. This field is a relationship field. Relationship Name ExtlRecShrCnct Refers To ExtlRecShrCnct
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description For internal use only.
OpportunityId	Type reference Properties Filter, Group, Sort Description ID of the associated opportunity. This field is a relationship field.

Field	Details
	Relationship Name Opportunity
	Relationship Type Master-detail
	Refers To Opportunity (the master object)

ExtlRecShrPcklstOptn

Represents a picklist option of an external record share picklist field shared between a partner and vendor for Partner Connect. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To see this object, enable Partner Connect or Partner Connect for Vendors. See [Set Up Partner Connect as a Partner](#) and [Set Up Partner Connect as a Vendor](#) in *Salesforce Help*.

Fields

Field	Details
ExtlRecShrFieldId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the associated external record share field of type picklist. This field is a relationship field. Relationship Name ExtlRecShrField Refers To ExtlRecShrField
IsDefaultOption	Type boolean

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this picklist option is set as the default option (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .
SharedOptionLabel	Type string Properties Create, Filter, Group, Sort, Update Description Label of the picklist option.
SharedOptionValue	Type string Properties Create, Filter, Group, Sort, Update Description Value of the picklist option.

ExtlRecShrPicklistMap

Represents the external record share picklist field mapping between the partner and vendor system for Partner Connect. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To see this object, enable Partner Connect or Partner Connect for Vendors. See [Set Up Partner Connect as a Partner](#) and [Set Up Partner Connect as a Vendor](#) in *Salesforce Help*.

Fields

Field	Details
ImportedPcklstOptionId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort
	Description ID of the external record share picklist option of the external system. This field is a relationship field.
	Relationship Name ImportedPcklstOption
	Refers To ExtlRecShrPcklstOptn
InternalPcklstOptionId	Type reference
	Properties Create, Filter, Group, Sort
	Description ID of the external record share picklist option of the internal system. This field is a relationship field.
	Relationship Name InternalPcklstOption
	Refers To ExtlRecShrPcklstOptn

ExtlRecShrRecordMap

Represents the lead or opportunity being mapped between a partner and vendor for Partner Connect. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

To see this object, enable Partner Connect or Partner Connect for Vendors. See [Set Up Partner Connect as a Partner](#) and [Set Up Partner Connect as a Vendor](#) in *Salesforce Help*.

Fields

Field	Details
ExtlRecShrCnctId	Type reference Properties Filter, Group, Sort Description ID of the external record share connection. This field is a relationship field. Relationship Name ExtlRecShrCnct Refers To ExtlRecShrCnct
ExtlRecord	Type string Properties Filter, Group, Nillable, Sort Description ID of the lead or opportunity record on the external system.
InboundStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Status of imports and updates received. Possible values are: • ImportSuccess • ImportConctExtlRecError • UpdateSuccess • UpdateFieldMapError • UpdateConctExtlRecError • UpdateUnknownError
InternalRecordId	Type reference Properties Filter, Group, Sort

Field	Details
	Description ID of the lead or opportunity record on the internal system. This field is a polymorphic relationship field. Relationship Name InternalRecord Relationship Type Master-detail Refers To Lead, Opportunity (the master object)
IsImported	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the record originated on the internal system (<code>true</code>) or external system (<code>false</code>). The default value is <code>false</code>.
LastModifiedSent	Type dateTime Properties Filter, Nillable, Sort Description Timestamp of the last record update between the vendor and partner. This field doesn't capture when the result is received.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description For internal use only.
OutboundStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Status of exports, updates, and results received. Possible values are:

Field	Details
	• <code>ExportSuccess</code> • <code>ExportInProgress</code> • <code>ExportSuccessSkipped</code> • <code>ExportSuccessPartial</code> • <code>ExportPublishFieldMapError</code> • <code>ExportSubscribeFieldMapError</code> • <code>ExportPublishEventError</code> • <code>ExportPublishUnknownError</code> • <code>ExportSubscribeUnknownError</code> • <code>ExportPublishConnectionError</code> • <code>UpdateInProgress</code> • <code>UpdateInProgressUpdateSuccess</code> • <code>UpdatePublishFieldMapErrorUpdateSubscribeRecordNotFound</code> • <code>UpdatePublishFieldMapError</code> • <code>UpdateSubscribeFieldMapError</code> • <code>UpdatePublishConnectionError</code> • <code>UpdatePublishEventError</code> • <code>UpdatePublishUnknownError</code> • <code>UpdateSubscribeUnknownError</code>
<code>UniqueRecordKey</code>	Type string Properties Filter, Group, Nillable, Sort Description Record key used internally for indexing. If <code>IsImported</code> is <code>false</code>, then this field contains the <code>InternalRecordId</code> value. If <code>IsImported</code> is <code>true</code>, this field contains the <code>ExtlRecord</code> value. This field is a calculated field.

FeedAttachment

Represents an attachment to a feed item, such as a file attachment or a link. Use `FeedAttachment` to add various attachments to one feed item. This object is available in API version 36.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `isEnabled()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

- You can read, create, update, or delete a FeedAttachment only if you have the corresponding access to the associated FeedItem.
- Inline images aren't creatable, updatable, or deletable through SOAP API.

Fields

Field Name	Details
FeedEntityId	Type reference Properties Create, Filter, Group, Sort Description The ID of the associated feed entity that contains this attachment.
RecordId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the record that this feed attachment contains. For inline images, RecordId is a ContentDocument ID. For content attachments, RecordId is a ContentVersion ID, For feed items, RecordId is a FeedItem ID.
Title	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The title of this feed attachment. When Type is Link, Title value is the label for the attachment link. Otherwise, Title value isn't used.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The type of this feed attachment. Valid values are: • 0 Content—A content attachment. • 1 InlineImage—An inline image. The system creates an inline image attachment when an image is added to the body of the associated FeedItem. You can't add an inline image directly using FeedAttachment. • 2 Link—A link.

Field Name	Details
	3 <code>FeedEntity</code>—A feed entity, for example, a post that is shared. Available in API version 39 and later in Lightning Experience. 4 <code>ChatterExtension</code>—a Rich Publisher App that's integrated with the Chatter publisher. 5 <code>Record</code>—A record.
Value	Type string Properties Create, Filter, Nillable, Sort, Update Description The string value of this FeedAttachment. This field is optional. If the feed attachment is a Link FeedAttachment, the value is the link URL string.

Usage

- This Apex example shows how to add an attachment to a Lead using API version 36.0 and later. First, post a feed item.

```
//create and insert post
FeedItem post = new FeedItem();
post.Body = 'HelloThere';
post.ParentId = 'ID_OF_LEAD_ENTITY';
post.Title = 'FileName';
insert post;
```

Then insert the attachment.

```
//create and associate a content attachment to the post
FeedAttachment feedAttachment = new FeedAttachment();
feedAttachment.FeedEntityId = post.Id;
feedAttachment.RecordId = 'ID_OF_CONTENT_VERSION';
feedAttachment.Title = 'FileName';
feedAttachment.Type = 'CONTENT';
insert feedAttachment;
```

- You can create only one link attachment (`FeedAttachment` of type `Link`) per feed item.
- If the feed item type is one of the following, you can add content or link feed attachments to a `FeedItem`.
 - AdvancedTextPost
 - TextPost
 - ContentPost
 - LinkPost
 - QuestionPost
- When a `FeedAttachment` is added or removed from a feed item, Salesforce updates the type of the feed item to its most appropriate value, as follows.

- If all content feed attachments are removed from a feed item of type `ContentPost`, the type of this feed item is updated to `TextPost`.
- Conversely, if a content feed attachment is added to a feed item of type `TextPost`, the type of this feed item is updated to `ContentPost`.
- If all link feed attachments are removed from a feed item of type `LinkPost`, the type of this feed item is updated to `TextPost`.
- Conversely, if a link feed attachment is added to a feed item of type `TextPost`, the type of this feed item is updated to `LinkPost`.
- The type of all other feed items, such as `QuestionPost` or `AdvancedTextPost` feed items, doesn't change when any feed attachments are added or removed.
- If a content feed attachment is added to a feed item of type `LinkPost`, the feed item type is updated to `ContentPost`.
- If all content attachments are removed from a feed item of type `ContentPost`, but there's also a link attachment, the feed item type is updated to `LinkPost`.
- Users without administrator privileges can't retrieve a `FeedAttachment` by its ID in a SOQL query. They can retrieve attachments by specifying the associated `FeedEntityId`, as follows:

```
SELECT Id FROM FeedAttachment WHERE FeedEntityId = 'some_feedItem_id'
```

- Alternatively, retrieve attachments by using a SOQL query on `FeedItem` with a subquery on the `FeedAttachments` child relationship, as follows.

```
SELECT Body, (SELECT RecordId, Title, Type, Value FROM FeedAttachments)
FROM FeedItem
WHERE Id = 'some_feedItem_id'
```

- `FeedAttachment` is not a triggerable object. You can access feed attachments in `FeedItem` *update* triggers by retrieving them through a SOQL query. For a trigger example, and to learn about trigger considerations for `FeedAttachment`, see [Triggers for Chatter Objects](#) in the *Apex Developer Guide*.

FeedComment

Represents a comment added to a feed by a user. This object is available in API version 18.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

Note the following when working with feed comments.

- You must have read access to the feed's parent type to see a `FeedComment` record.
- You must be able to access the feed to add a comment.
- If the comment is related to a user record, the user can delete the comment. For example, if John Smith makes a comment on Sasha Jones' profile feed, Sasha can delete the comment.

- If the context user has the Insert System Field Values for Chatter Feeds user permission, the `create` field property is available on `CreatedBy` and `CreatedDate` system fields. During migration, the context user can set these fields to the original post's author and creation date. The fields can't be updated after migration.

You can delete all feed items you created. To delete feed items you didn't create, you must have one of these permissions:

- Modify All Data
- Modify All Records on the object associated with the feed and delete permission on the parent feed
- Moderate Chatter



Note: Users with the Moderate Chatter permission can delete only the feed items and comments they can see.

- Manage Unlisted Groups
Only users with this permission can delete items in unlisted groups.

Fields

Field	Details
<code>CommentBody</code>	Type textarea Properties Create, Filter, Sort, Update Description The text in the comment.
<code>CommentType</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The type of comment: • <code>ContentComment</code>—an uploaded file on a comment • <code>TextComment</code>—a direct text entry on a comment Before API version 24.0, a text entry was required on a comment. As of version 24.0, a text entry is optional if the <code>CommentType</code> is <code>ContentComment</code>.
<code>FeedItemId</code>	Type reference Properties Create, Filter, Group, Sort Description ID of the feed item containing the comment.

Field	Details
HasEntityLinks	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the feed <code>CommentBody</code> includes at least one link to a record.  Note: This field is available starting in API version 43.0.
InsertedById	Type reference Properties Filter, Group, Sort Description ID of the user who added this item to the feed. For example, if an application migrates posts and comments from another application into a feed, the <code>InsertedBy</code> value is set to the ID of the context user. This is a relationship field. Relationship Name InsertedBy Relationship Type Lookup Refers To User
IsRichText	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the feed <code>CommentBody</code> contains rich text. If you post a rich text feed comment using SOAP API, set <code>IsRichText</code> to <code>true</code> and escape HTML entities from the body. Otherwise, the comment is rendered as plain text. Rich text supports the following HTML tags: • <code><p></code>  Tip: Though the <code>
</code> tag isn't supported, you can use <code><p>&nbsp; </p></code> to create lines. • <code><a></code> • <code></code> • <code><code></code>

Field	Details
	• <code><i></code> • <code><u></code> • <code><s></code> • <code></code> • <code></code> • <code></code> • <code></code> The <code></code> tag is accessible only through the API and must reference files in Salesforce similar to this example: <code></code>  Note: This attribute is available as of API version 38.0. In API version 38.0 and later, the system replaces special characters in rich text with escaped HTML. In API version 37.0 and prior, all rich text appears as a plain-text representation.
IsVerified	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Determines whether a comment on a question is marked as Company Verified. This field is available in API version 41.0 and later.
LastEditById	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the user who last edited the feed comment.
LastEditDate	Type datetime Properties Create, Filter, Nillable, Sort Description The date the feed comment was last edited.
ParentId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description ID of a record associated with the feed comment. For example, if you are commenting on a change to a field on Account, <code>ParentId</code> is set to the account ID.
RelatedRecordId	Type reference Properties Create, Group, Nillable, Sort Description ID of the <code>ContentVersion</code> record associated with a <code>ContentComment</code>. This field is null for all comments except <code>ContentComment</code>. For example, set this field to an existing <code>ContentVersion</code> ID and set the <code>CommentType</code> to <code>ContentComment</code>.
Revision	Type int Properties Create, Filter, Group, Nillable, Sort Description The number of times the comment was revised.
Status	Type picklist Properties Create, Defaulted on create, Group, Nillable, Restricted picklist, Sort, Update Description Specifies whether this feed comment is published and visible to all who can access the parent feed item. To change a comment's status, the comment's parent feed item must be in a published state. This field is available in API version 38.0 and later. Possible values are: • <code>Published</code>—The comment is visible to all who can access the parent feed item. • <code>PendingReview</code>—The comment is visible to its author. Users see the parent feed item and have View All Data or Can Approve Feed Post and Comment permission also see the comment. The author can delete the comment as can users who see the comment and have Can Approve Feed Post and Comment or Modify All Data permission. If the parent feed item is published, the author can edit the comment. Users who see the comment and have Can Approve Feed Post and Comment or Modify All Data permission can also edit the comment. Users with Can Approve Feed Post and Comment or Modify All Data permission can change comment status from <code>Published</code> to <code>PendingReview</code> and from <code>PendingReview</code> to <code>Published</code>. Some actions are blocked when a feed comment is pending review:

Field	Details
	– Select as Best—When a feed comment that is marked as best answer becomes unpublished, it's removed as the best answer. If the comment is published, its best answer status is not restored. – Like and unlike • Isolated—The comment is visible only to admins. After an item is isolated, the author no longer has view or edit access. The admin user can edit, view, and delete isolated feed comments.
SystemModstamp	Type datetime Properties Defaulted on create, Filter Description Date and time when a user or automated process (such as a trigger) last modified this record. In this context, "trigger" refers to Salesforce code that runs to implement standard functionality, and not an Apex trigger. <code>SystemModstamp</code> is a read-only system field, available in FeedComment as of API version 37.0.
ThreadChildrenCount	Type int Properties Create, Filter, Group, Nillable, Sort Description The count of comments associated with this parent feed object. The feed object can be either a Feed Item or a Feed Comment. The count shows how many comments are directly subordinate to the parent. This field is available on the object when Allow discussion threads is selected in the Administration Workspace. This field is available in API version 44.0 and later.
ThreadLastUpdatedDate	Type dateTime Properties Create, Filter, Nillable, Sort Description The date and time the thread on this comment was last updated. This field is available on the object when Allow discussion threads is selected in the Administration Workspace. This field is available in API version 44.0 and later.
ThreadLevel	Type int Properties Create, Filter, Group, Nillable, Sort

Field	Details
	Description The identifier that shows the level of this Feed Comment in a thread. By default, there are a maximum of three levels in a thread. The <code>ThreadLevel</code> value shows in which of the three levels this comment falls. This field is available on the object when Allow discussion threads is selected in the Administration Workspace. This field is available in API version 44.0 and later.
ThreadParentId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The identifier of the feed item that is the parent of this comment. This field is available on the object when Allow discussion threads is selected in the Administration Workspace. This field is available in API version 44.0 and later. This is a relationship field. Relationship Name ThreadParent Relationship Type Lookup Refers To FeedComment

Usage

- As of API version 23.0 and later, if you have View All Data permission, you can query FeedComment records directly without an ID filter. If you don't have View All Data permission, you can't query FeedComment records directly, with or without an ID filter.

For example, the following query returns general information about a feed:

```
SELECT ID, CreatedDate, CreatedById, CreatedBy.FirstName,
       CreatedBy.LastName, ParentId, Parent.Name, Body
FROM FeedItem
WHERE CreatedDate > LAST_MONTH
ORDER BY CreatedDate DESC, Id DESC
```

- You can search for text in comments using SOSL. For example, the following Java class uses `search()` to find the string "foo" in any field of a record:

```
public void searchSample() {
    try {
        SearchResult sr = connection.search("find {foo} in all fields " +
            "returning feedcomment(Id, FeedItemId, CommentBody)");
        // Put the results into an array of SearchRecords
        SearchRecord[] records = sr.getSearchRecords();
        // Check the length of the returned array of records to see
```

```
// if the search found anything
if (records != null && records.length > 0) {
    System.out.println("Found " + records.length + " comments: ");
    // Display each comment
    for (SearchRecord record : records) {
        FeedComment comment = (FeedComment) record.getRecord();
        System.out.println(comment.getId() + ": " +
            comment.getCommentBody());
    }
} else {
    System.out.println("No records were found for the search.");
}
} catch (ConnectionException ce) {
    ce.printStackTrace();
}
}
```

- If you use an Apex trigger to modify the `Body` of a `FeedComment` object, all mentions hyperlinks are converted to plain text. The mentioned users don't get email notifications.

 **Note:** This object is hard deleted. It isn't sent to the Recycle Bin.

SEE ALSO:

[Custom Object __Feed __Feed](#)

FeedItem

`FeedItem` represents an entry in the feed, such as changes in a record feed, including text posts, link posts, and content posts. This object is available in API version 21.0 and later. This object replaces `FeedPost`.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `describeLayout()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

- You can delete all feed items you created. To delete feed items you didn't create, you must have one of these permissions:
 - Modify All Data
 - Modify All Records on the feed item's parent object, for example, Account for a feed item on an account feed
 - Moderate Chatter

 **Note:** Users with the Moderate Chatter permission can delete only the feed items and comments that they can see.

Only users with this permission can delete items in unlisted groups.

- Guest users can't insert system field values for Chatter feeds. Even if you try to assign the `CanInsertFeedSystemFields` permission to a Guest User, the permission isn't granted.

Only users with the Modify All Data permission can delete a feed item of Type `TrackedChange`.

If the context user has the Insert System Field Values for Chatter Feeds user permission, the `create` field property is available on `CreatedBy` and `CreatedDate` system fields. During migration, the context user can set these fields to the original post's author and creation date. The fields can't be updated after migration.

Fields

Field Name	Details
<code>BestCommentId</code>	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the comment marked as best answer on a question post. This is a relationship field. Relationship Name BestComment Relationship Type Lookup Refers To FeedComment
<code>Body</code>	Type textarea Properties Create, Nillable, Sort, Update Description The body of the feed item. Required when <code>Type</code> is <code>TextPost</code> or <code>AdvancedTextPost</code>. Optional when <code>Type</code> is <code>ContentPost</code> or <code>LinkPost</code>. Although a value for <code>Body</code> isn't required for the <code>ContentPost</code> type, an attachment is required. If an attachment isn't present, the type changes to <code>TextPost</code> or <code>AdvancedTextPost</code>, depending on the API version. <code>TextPost</code> and <code>AdvancedTextPost</code> do require a value for <code>Body</code>.  Tip: See the IsRichText field for a list of HTML tags supported in the body of rich text posts.
<code>CommentCount</code>	Type int Properties Filter, Group, Sort

Field Name	Details
	Description The number of comments associated with this feed item.  Tip: In a feed that supports pre-moderation, <code>CommentCount</code> isn't updated until a comment is published. For example, say that you comment on a post that already has one published comment and your comment triggers moderation. Now there are two comments on the post, but the count says there's only one. In a moderated feed, comments aren't counted until approved by an admin or someone with <code>Can Approve Feed Post and Comment</code> or <code>Modify All Data</code>. Feed moderation has implications on how you retrieve feed comments. In a moderated feed, rather than retrieving comments by looping through <code>CommentCount</code>, go through pagination until the end of comments is returned.
<code>ConnectionId</code>	Type reference Properties Filter, Group, Nillable, Sort Description When a <code>PartnerNetworkConnection</code> modifies a record that is tracked, the <code>CreatedBy</code> field contains the ID of the system administrator. The <code>ConnectionId</code> contains the ID of the <code>PartnerNetworkConnection</code>. Available if Salesforce to Salesforce is enabled for your org.
<code>ContentData</code>	Type base64 Properties Create, Nillable Description This field was removed in API version 35.0, and is available in earlier versions for backward compatibility only. This field is required if <code>Type</code> is <code>ContentPost</code>. Encoded file data in any format, and can't be 0 bytes. Setting this field automatically sets <code>Type</code> to <code>ContentPost</code>.
<code>ContentDescription</code>	Type textarea Properties Create, Nillable, Sort Description This field was removed in API version 35.0, and is available in earlier versions for backward compatibility only. The description of the file specified in <code>ContentData</code>.

Field Name	Details
ContentFileName	Type string Properties Create, Group, Nillable, Sort Description This field was removed in API version 35.0, and is available in earlier versions for backward compatibility only. The name of the file uploaded to the feed. Setting ContentFileName automatically sets Type to ContentPost.
ContentSize	Type int Properties Group, Nillable, Sort Description This field was removed in API version 35.0, and is available in earlier versions for backward compatibility only. This field is the size of the file (in bytes) uploaded to the feed. This field is read-only and is automatically determined during insert.
ContentType	Type string Properties Group, Nillable, Sort Description This field was removed in API version 35.0, and is available in earlier versions for backward compatibility only. This field is the MIME type of the file uploaded to the feed. This field is read-only and is automatically determined during insert.
FeedPostId	Type reference Properties Filter, Group, Nillable, Sort Description This field was removed in API version 22.0, and is available in earlier versions for backward compatibility only. ID of the associated FeedPost. A FeedPost represents the following types of changes in a feed item: changes to tracked fields, text posts, link posts, and content posts.
HasContent	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field Name	Details
	Description Indicates whether the feed item has content.
HasFeedEntity	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the feed item has a feed entity, for example, a post, as an attachment. Available in API version 39 and later when sharing a feed entity in Lightning Experience.
HasLink	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the feed item has a link attached.
HasVerifiedComment	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Determines whether a question has an answer that is marked as Company Verified. This field is available in API version 41.0 and later.
InsertedById	Type reference Properties Filter, Group, Sort Description ID of the user who added this item to the feed. For example, if an application migrates posts and comments from another application into a feed, the <code>InsertedBy</code> value is set to the ID of the context user. This is a polymorphic relationship field. Relationship Name InsertedBy Relationship Type Lookup

Field Name	Details
	Refers To User
IsClosed	Type boolean Properties Defaulted on create, Filter, Group, Sort Description As of API version 43, a read-only field that indicates whether the feed item is open or closed to new actions. A value of <code>true</code> places restrictions on the actions a user can take on a feed item and its comments. For more information, see the Usage section.
IsDeleted	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Standard system field. Indicates whether the record has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>).
IsRichText	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the feed item <code>Body</code> contains rich text. If you post a rich text feed comment using SOAP API, set <code>IsRichText</code> to <code>true</code> and escape HTML entities from the body. Otherwise, the post is rendered as plain text. Rich text supports the following HTML tags: • <code><p></code> •  Tip: Though the <code>
</code> tag isn't supported, you can use <code><p>&nbsp; </p></code> to create lines. • <code><a></code> • <code></code> • <code><code></code> • <code><i></code> • <code><u></code> • <code><s></code> • <code></code>

Field Name	Details
	• <code></code> • <code></code> • <code></code> The <code></code> tag is accessible only through the API and must reference files in Salesforce similar to this example: <code></code>  Note: In API version 35.0 and later, the system replaces special characters in rich text with escaped HTML. In API version 34.0 and prior, all rich text appears as a plain-text representation.
LastEditById	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the user who last edited the feed item.
LastEditDate	Type datetime Properties Create, Filter, Nillable, Sort Description The date the feed item was last edited.
LikeCount	Type int Properties Filter, Group, Sort Description The number of likes associated with this feed item.
LinkUrl	Type url Properties Create, Nillable, Sort Description The URL of a <code>LinkPost</code>.
NetworkScope	Type picklist

Field Name	Details
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Specifies whether this feed item is available in the default Experience Cloud site, a specific Experience Cloud site, or all sites. This field is available in API version 26.0 and later, if digital experiences is enabled for your org. <code>NetworkScope</code> can have the following values: <code>NetworkId</code>—The ID of the Experience Cloud site in which the <code>FeedItem</code> is available. If left empty, the feed item is only available in the default Experience Cloud site. <code>AllNetworks</code>—The feed item is available in all Experience Cloud sites. Note the following exceptions for <code>NetworkScope</code>: - Only feed items with a Group or User parent can set a <code>NetworkId</code> or a null value for <code>NetworkScope</code>. - For feed items with a record parent, users can set <code>NetworkScope</code> only to <code>AllNetworks</code>. - You can't filter a feed item on the <code>NetworkScope</code> field.
ParentId	Type reference Properties Create, Filter, Group, Sort Description ID of the object type to which the feed item is related. For example, set this field to a <code>UserId</code> to post to someone's profile feed, or an <code>AccountId</code> to post to a specific account. This is a polymorphic relationship field. Relationship Name Parent Relationship Type Lookup Refers To Account, Accreditation, ActivationTarget, ActivationTrgtIntOrgAccess, ApiAnomalyEventStore, AssessmentIndicatorDefinition, AssessmentTask, AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskIndDefinition, AssessmentTaskOrder, Asset, AssetRelationship, AssignedResource, Award, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, Campaign, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis, CareInterventionType, CareMetricTarget, CareObservation, CareObservationComponent, CarePgmProvHealthcareProvider, CarePreauth, CarePreauthItem, CareProgram, CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee,

Field Name	Details
	CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider, CareProgramTeamMember, CareProviderAdverseAction, CareProviderFacilitySpecialty, CareProviderSearchableField, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareSpecialtyTaxonomy, CareTaxonomy, Case, CodeSet, CollaborationGroup, CommSubscription, CommSubscriptionChannelType, CommSubscriptionConsent, CommSubscriptionTiming, ConsumptionSchedule, Contact, ContactEncounter, ContactEncounterParticipant, ContentDocument, Contract, CoverageBenefit, CoverageBenefitItem, CredentialStuffingEventStore, CreditMemo, CreditMemoLine, Dashboard, DashboardComponent, DataStream, DelegatedAccount, DocumentChecklistItem, EngagementChannelType, EnhancedLetterhead, EnrollmentEligibilityCriteria, Event, HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, Identifier, Image, IndividualApplication, Invoice, InvoiceLine, Lead, Location, MarketSegment, MarketSegmentActivation, MemberPlan, MessagingSession, MktCalculatedInsight, OperatingHours, Opportunity, Order, OrderItem, OtherComponentTask, PartyConsent, PersonEducation, PersonLanguage, PersonLifeEvent, PersonName, PlanBenefit, PlanBenefitItem, Product2, ProductFulfillmentLocation, ProductItem, ProductItemTransaction, ProductRequest, ProductRequestLineItem, ProductRequired, ProductTransfer, ProfileSkill, ProfileSkillEndorsement, ProfileSkillUser, ProviderSearchSyncLog, PurchaserPlan, PurchaserPlanAssn, ReceivedDocument, Report, ReportAnomalyEventStore, ResourceAbsence, ResourcePreference, ReturnOrder, ReturnOrderLineItem, ServiceAppointment, ServiceResource, ServiceResourceSkill, ServiceTerritory, ServiceTerritoryMember, ServiceTerritoryWorkType, SessionHijackingEventStore, Shift, Shipment, ShipmentItem, Site, SkillRequirement, SocialPost, Solution, Task, ThreatDetectionFeedback, Topic, User, Visit, VisitedParty, Visitor, VoiceCall, VolunteerProject, WorkBadgeDefinition, WorkOrder, WorkOrderLineItem, WorkType, WorkTypeGroup, WorkTypeGroupMember
RelatedRecordId	Type reference Properties Create, Group, Nillable, Sort Description ID of the ContentVersion record associated with a ContentPost. For WDC thanks posts, it's the ID of the WorkThanks object associated with a RypplePost. This field is typically null for all posts except ContentPost and RypplePost. For example, set this field to an existing ContentVersion ID and post it to a feed with Type set to ContentPost.

Field Name	Details
Revision	Type int Properties Create, Filter, Group, Nillable, Sort Description The revision number of the feed item.
Status	Type picklist Properties Create, Defaulted on create, Group, Nillable, Restricted picklist, Sort, Update Description Specifies whether this feed item is published and visible to all who can access the feed. This field is available in API version 37.0 and later. Possible values are: • Published—The item's visible to all with access to the feed. • PendingReview—The item's visible to its author and users who see the item and have View All Data or Can Approve Feed Post and Comment permission. Some people can delete and edit the item. They include the author and users who see the item and have Can Approve Feed Post and Comment or Modify All Data permission.  Note: These permissions don't apply when you retrieve feed items using SOQL. To filter out Pending Review feed items you must add an explicit clause. Some actions are blocked when a feed item is pending review: — Comment — Like and unlike — Bookmark — Share • Isolated—The item is visible only to admins. After an item is isolated, the author no longer has view or edit access. The admin user can edit, view, and delete isolated feed items.
Title	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The title of the feed item. When the Type is LinkPost, the LinkUrl is the URL and this field is the link name. The Title field can be updated on posts of Type QuestionPost.

Field Name	Details
Type	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The type of feed item. Except for <code>ContentPost</code>, <code>LinkPost</code>, <code>QuestionPost</code>, and <code>TextPost</code>, all the <code>FeedItem</code> types listed here are system-generated. In most situations, we recommend that you don't create system-generated fields using Apex or our APIs. One exception is during Chatter data migrations, which can require admins to migrate system-generated post types. • <code>ActivityEvent</code>—indirectly generated event when a user or the API adds a <code>Task</code> associated with a feed-enabled parent record (excluding email tasks on cases). Also occurs when a user or the API adds or updates a <code>Task</code> or <code>Event</code> associated with a case record (excluding email and call logging). For a recurring <code>Task</code> with <code>CaseFeed</code> disabled, one event is generated for the series only. For a recurring <code>Task</code> with <code>CaseFeed</code> enabled, events are generated for the series and each occurrence. • <code>AdvancedTextPost</code>—created when a user posts a group announcement and, in Lightning Experience as of API version 39.0 and later, when a user shares a post. • <code>AnnouncementPost</code>—Not used. • <code>ApprovalPost</code>—generated when a user submits an approval. • <code>BasicTemplateFeedItem</code>—Not used. • <code>CanvasPost</code>—a post made by a canvas app posted on a feed. • <code>CollaborationGroupCreated</code>—generated when a user creates a public group. • <code>CollaborationGroupUnarchived</code>—Not used. • <code>ContentPost</code>—a post with an attached file. • <code>CreatedRecordEvent</code>—generated when a user creates a record from the publisher. • <code>DashboardComponentAlert</code>—generated when a dashboard metric or gauge exceeds a user-defined threshold. • <code>DashboardComponentSnapshot</code>—created when a user posts a dashboard snapshot on a feed. • <code>LinkPost</code>—a post with an attached URL. • <code>PollPost</code>—a poll posted on a feed. • <code>ProfileSkillPost</code>—generated when a skill is added to a user's Chatter profile. • <code>QuestionPost</code>—generated when a user posts a question. • <code>ReplyPost</code>—generated when Chatter Answers posts a reply.

Field Name	Details
	• <code>RypplePost</code>—generated when a user creates a Thanks badge in WDC. • <code>TextPost</code>—a direct text entry on a feed. • <code>TrackedChange</code>—a change or group of changes to a tracked field. • <code>UserStatus</code>—automatically generated when a user adds a post. Deprecated. The following values appear in the <code>Type</code> picklist for all feed objects but apply only to <code>CaseFeed</code>: • <code>AttachArticleEvent</code>—generated event when a user attaches an article to a case. • <code>CallLogPost</code>—generated event when a user logs a call for a case through the user interface. CTI calls also generate this event. • <code>CaseCommentPost</code>—generated event when a user adds a case comment for a case object. • <code>ChangeStatusPost</code>—generated event when a user changes the status of a case. • <code>ChatTranscriptPost</code>—generated event when Chat transcript is saved to a case. • <code>EmailMessageEvent</code>—generated event when an email related to a case object is sent or received. • <code>FacebookPost</code>—generated when a Facebook post is created from a case. Deprecated. • <code>MilestoneEvent</code>—generated when a case milestone is completed or reaches violation status. • <code>SocialPost</code>—generated when a social post is created from a case.  Note: If you set <code>Type</code> to <code>ContentPost</code>, also specify <code>ContentData</code> and <code>ContentFileName</code>.
Visibility	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies whether this feed item is available to all users or internal users only. This field is available in API version 26.0 and later, if digital experiences is enabled for your org. <code>Visibility</code> can have the following values: • <code>AllUsers</code>—The feed item is available to all users who have permission to see the feed item. • <code>InternalUsers</code>—The feed item is available to internal users only. Note the following exceptions for <code>Visibility</code>:

Field Name	Details
	- For record posts, <code>Visibility</code> is set to <code>InternalUsers</code> for all internal users by default. - External users can set <code>Visibility</code> only to <code>AllUsers</code>. <code>Visibility</code> can be updated on record posts. - The <code>Update</code> property is supported only for feed items posted on records.

Usage

- When a feed item's `IsClosed` field is set to true, some actions are blocked and others are blocked to most users. This table sets out the actions that are blocked when a feed item is closed.

Action	Availability on a Closed Conversation
Add a comment	Blocked
Answer a question	Blocked
Vote on a poll	Blocked
Edit a feed item or its comments or answers	Blocked to author; available to admins, moderators, and people with the Close Conversation Threads in Feeds permission Editing is blocked specifically for the feed item title, feed item body, and feed content body fields.
Edit a topic	Available
Delete a feed item or its comments or answers	Blocked to author; available to admins, moderators, and people with the Close Conversation Threads in Feeds permission
Publish a pending review comment (moderation)	Available to admins and moderators
Like or unlike; upvote or downvote	Available
Select or remove a best answer	Blocked to author; available to admins, moderators, and people with the Close Conversation Threads in Feeds permission
Company verify; remove verification	Available only to people with the Verify Answers to Chatter Questions permission
Flag	Available
Share	Available
Bookmark	Available
Mute and unmute	Available
Escalate to case	Available only to people permitted to escalate a feed item to a case

- This Apex example shows how to add a feed item with an attachment to a lead using API version 36.0 and later. First, post a feed item.

```
//create and insert post
FeedItem post = new FeedItem();
post.Body = 'HelloThere';
post.ParentId = 'ID_OF_LEAD_ENTITY';
post.Title = 'FileName';
insert post;
```

Then insert the attachment.

```
//create and associate a content attachment to the post
FeedAttachment feedAttachment = new FeedAttachment();
feedAttachment.FeedEntityId = post.Id;
feedAttachment.RecordId = 'ID_OF_CONTENT_VERSION';
feedAttachment.Title = 'FileName';
feedAttachment.Type = 'CONTENT';
insert feedAttachment;
```

- If you're using API version 23.0 or later and have View All Data permission, you can directly query for a FeedItem. The following example returns the 20 most recent feed items.

```
SELECT ID, CreatedDate, CreatedById, CreatedBy.FirstName, CreatedBy.LastName, ParentId,
       Parent.Name, Body,
       (SELECT ID, FieldName, OldValue, NewValue FROM FeedTrackedChanges ORDER BY ID DESC)
FROM FeedItem
WHERE CreatedDate > LAST_MONTH
ORDER BY CreatedDate DESC
```

- If you're using an earlier API version than version 23.0, query FeedItem objects through a feed (such as AccountFeed or OpportunityFeed). The following example returns all feed items for a given account, ordered by date descending:

```
SELECT Id, Type, FeedItem.Body
FROM AccountFeed
WHERE ParentId = AccountId ORDER BY CreatedDate DESC
```

 **Note:** Provide the `ParentId` for API version 22.0 and earlier.

- A feed item of type `UserStatus` is automatically created when a user adds a post to update the status. You can't explicitly create a feed item of type `UserStatus`.
- The `FeedItem` object doesn't support aggregate functions in queries.
- If the context user has the Insert System Field Values for Chatter Feeds user permission, the `create` field property is available on `CreatedBy` and `CreatedDate` system fields. During migration, the context user can set these fields to the original post's author and creation date. The fields can't be updated after migration.
- The size limit for an attachment on a feed is 2 GB.
- You can't use the content fields to update or delete the content.
- You can't filter or update the content fields.
- Deleting a feed item via the API also deletes the associated content. Likewise, undeleting a feed item restores associated content.

 **Note:** This object is hard deleted. It isn't sent to the Recycle Bin.

- After uploading to a feed, it's possible for an attachment or document to be deleted, marked private, or hidden by sharing rules. In this case, all content fields in a `FeedItem` object appear as `null` in a SOQL query.
- You can't explicitly create or delete a [FeedTrackedChange](#) record.
- Imagine that you insert a feed item or feed comment of `Type ContentPost` on a [User](#) or [Group](#) to create a file. Then the `NetworkScope` field value of the feed item is passed to the file.
- If you use an Apex trigger to modify the `Body` of a `FeedItem` object, all mentions hyperlinks are converted to plain text. The mentioned users don't get email notifications.
- If you insert rich text into the feed item body, make sure that the case of the opening and closing HTML tags matches. For example, `<b>This is bold text</B>` generates an error.
- To check file sharing with Apex triggers, write triggers on `ContentDocumentLink` instead of `FeedItem`. For an example, see [ContentDocumentLink](#).
- In API version 36.0 and later, use [FeedAttachment](#) to attach one or more content items to a feed item. As a result of support for multiple attachments through `FeedAttachment`, all fields related to content attachments have been removed. These fields are: `ContentData`, `ContentDescription`, `ContentFileName`, `ContentSize`, and `ContentType`.
- For all API versions of `FeedItem`, you can't query a `FeedItem` object using the `System ModStamp` filter.
- When you use the `FeedItem` object to create a record-triggered flow, and the flow tries to update a field on the parent record, the field may not update in the UI until the page is refreshed.

FeedLike

Indicates that a user has liked a feed item. This object is available in API version 21.0 and later.

`FeedLike` records represent likes on posts and not likes on comments. Likes on comments can't be queried via the API. A `FeedLike` is a child object of an associated `FeedItem`, `FeedTrackedChange`, or object feed, such as `AccountFeed`.

Supported Calls

`create()`, `delete()`, `describeSObjects()`

Special Access Rules

If the context user has the `Insert System Field Values for Chatter Feeds` user permission, the `create` field property is available on `CreatedBy` and `CreatedDate` system fields. During migration, the context user can set these fields to the original post's author and creation date. The fields can't be updated after migration.

Fields

Field Name	Details
<code>FeedItemId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the feed item that the user liked.

Field Name	Details
FeedEntityId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of a feed item or feed comment the user liked. If the user liked a comment, <code>FeedEntityId</code> is set to the ID of the comment. If the user liked a feed item, <code>FeedEntityId</code> is set to the ID of the feed item. This field is optional. The default value is the ID of the feed item.
InsertedById	Type reference Properties Filter, Group, Sort Description ID of the user who added this item to the feed. For example, if an application migrates posts and comments from another application into a feed, the <code>InsertedBy</code> value is set to the ID of the context user. This is a relationship field. Relationship Name InsertedBy Relationship Type Lookup Refers To User

Usage

You can't query `FeedLike` records directly. They can only be queried via the entity feed, such as `AccountFeed`.

`FeedLike` records represent likes on posts and not likes on comments. Likes on comments can't be queried via the API.

FeedPollChoice

Shows the choices for a poll posted in the feed. This object is available in API version 29.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

To delete feed items they didn't create, users must have one of these permissions:

- Modify All Data
- Modify All Records on the parent object, for example on Account for a poll on an AccountFeed
- Moderate Chatter



Note: Users with the Moderate Chatter permission can delete only the feed items and comments they can see.

Only users with this permission can delete items in unlisted groups.

Fields

Field Name	Details
ChoiceBody	Type textarea Properties Group Description A choice in the poll.
FeedItemId	Type reference Properties Filter, Group, Sort Description ID of the feed item for the poll.
Position	Type int Properties Group, Sort Description Shows the position of the poll choice.

Usage

Use this object to query all of the choices associated with a particular poll. To view how people voted on the poll, see the FeedPollVote object.

FeedPollVote

Shows how users voted on a poll posted in the feed. This object is available in API version 29.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
ChoiceId	Type reference Properties Filter, Group Description Indicates which choice a user selected on a poll posted in a feed. This is a relationship field. Relationship Name Choice Relationship Type Lookup Refers To FeedPollChoice
FeedItemId	Type reference Properties Filter, Group, Sort Description ID of the feed item for the poll.

Usage

Use this object to query how users voted on a particular poll.

FeedPost

FeedPost represents the following types of changes in a record feed, such as AccountFeed: text posts, link posts, and content posts. This object is available in API version 18.0 through 21.0. FeedPost is no longer available in later versions. Starting with API version 21.0, use FeedItem to represent text posts, link posts, and content posts in feeds.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `search()`

Special Access Rules

You can delete all feed items you created. To delete feed items you didn't create, you must have one of these permissions:

- "Modify All Data"
- "Modify All Records" on the object associated with the feed and delete permission on the parent feed
- "Moderate Chatter"



Note: Users with the "Moderate Chatter" permission can delete only the feed items and comments they can see.

- Manage Unlisted Groups

Only users with this permission can delete items in unlisted groups.

Only users with the Modify All Data permission can delete a feed item of `Type TrackedChange`.

If the context user has the Insert System Field Values for Chatter Feeds user permission, the `create` field property is available on `CreatedBy` and `CreatedDate` system fields. During migration, the context user can set these fields to the original post's author and creation date. The fields can't be updated after migration.

Fields

Field	Details
Body	Type string Properties Create, Filter, Nillable, Sort Description The content of the FeedPost. Required when <code>Type</code> is <code>TextPost</code> or <code>AdvancedTextPost</code>. Optional when <code>Type</code> is <code>ContentPost</code> or <code>LinkPost</code>.
ContentData	Type base64 Properties Create, Nillable Description This field is required if <code>Type</code> is <code>ContentPost</code>. Encoded file data in any format, and can't be 0 bytes. Setting this field automatically sets <code>Type</code> to <code>ContentPost</code>.
ContentDescription	Type string Properties Create, Nillable, Sort

Field	Details
	Description The description of the file specified in <code>ContentData</code> .
<code>ContentFileName</code>	Type string Properties Create, Group, Nillable, Sort Description This field is required if <code>Type</code> is <code>ContentPost</code> . The name of the file uploaded to the feed. Setting <code>ContentFileName</code> automatically sets <code>Type</code> to <code>ContentPost</code> .
<code>ContentSize</code>	Type int Properties Group, Nillable, Sort Description This field is the size of the file (in bytes) uploaded to the feed. This field is read-only and is automatically determined during insert.
<code>ContentType</code>	Type string Properties Group, Nillable, Sort Description This field is the MIME type of the file uploaded to the feed. This field is read-only and is automatically determined during insert.
<code>FeedItemId</code>	Type reference Properties Filter, Group, Sort Description ID of the feed containing the <code>FeedPost</code> .
<code>InsertedById</code>	Type reference Properties Filter, Group, Sort

Field	Details
	Description ID of the user who added this item to the feed. For example, if an application migrates posts and comments from another application into a feed, the <code>InsertedBy</code> value is set to the ID of the context user.
IsDeleted	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the record has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). This field is a standard system field.
LinkUrl	Type url Properties Create, Filter, Nillable, Sort Description The URL of a <code>LinkPost</code>.
ParentId	Type reference Properties Create, Filter, Group, Sort Description ID of the object type to which the <code>FeedPost</code> is related. For example, set this field to a <code>UserId</code> to post to someone's profile feed, or an <code>AccountId</code> to post to a specific account.
Title	Type string Properties Create, Filter, Group, Nillable, Sort Description The title of the <code>FeedPost</code>. When the <code>Type</code> is <code>LinkPost</code>, the <code>Body</code> is the URL and the <code>Title</code> is the label for the link.
Type	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort

Field	Details
	Description The type of FeedPost: • <code>UserStatus</code>—automatically generated when a user updates their status • <code>TrackedChange</code>—ignore • <code>TextPost</code>—a direct text entry on a feed • <code>LinkPost</code>—a URL posting on a feed • <code>ContentPost</code>—an uploaded file on a feed  Note: If you set <code>Type</code> to <code>ContentPost</code>, you must specify <code>ContentData</code> and <code>ContentFileName</code>.

Usage

- You can't directly query for a FeedPost. FeedPosts are always associated with a feed item, so you can query for them through the feeds. The following example returns all feed items for a given account, ordered by date descending:

```
SELECT Id, Type, FeedPost.Body
FROM AccountFeed
WHERE ParentId = AccountId ORDER BY CreatedDate DESC
```

- A FeedPost of type `UserStatus` is automatically created when a user adds a post to update the current status. You can't explicitly create a FeedPost of type `UserStatus`.
 - The size limit for an attachment on a profile, news, or record feed is 2 GB.
 - You can't use the content fields to update or delete the content.
 - You can't filter or update the content fields.
 - Deleting a FeedPost via the API also deletes the associated content and FeedPost objects. Likewise, undeleting a FeedPost restores associated content and FeedPost objects.
-  **Note:** This object is hard deleted. It isn't sent to the Recycle Bin.
- After uploading to a feed, it is possible for an attachment or document to be deleted, marked private, or hidden by sharing rules. In this case, all content fields in FeedPost appear as `null` in a SOQL query.
 - You can't explicitly create or delete a FeedTrackedChange record.

FeedRevision

Holds the revision history of a specific feed item or comment, including a list of attributes that changed for each revision. This object is available in API version 34.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field Name	Details
Action	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Holds the type of modification to the underlying feed item or comment attribute. <code>Action</code> can have the value <code>Changed</code>.
EditedAttribute	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Identifies the part of the feed item or comment which was modified. A single revision can have many edited attributes.
FeedEntityId	Type reference Properties Filter, Group, Sort Description Identifies the modified feed item or comment.
IsDeleted	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the record has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). This field is a standard system field.
IsValueRichText	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the feed item <code>Body</code> contains rich text. If you post a rich text feed comment using SOAP API, set <code>IsRichText</code> to <code>true</code> and escape HTML entities from the body. Otherwise, the post is rendered as plain text. Rich text supports the following HTML tags:

Field Name	Details
	• <code><p></code> Though the <code>
</code> tag isn't supported, you can use <code><p>&nbsp;</p></code> to create lines. • <code><a></code> • <code></code> • <code><code></code> • <code><i></code> • <code><u></code> • <code><s></code> • <code></code> • <code></code> • <code></code> • <code></code> The <code></code> tag is accessible only through the API and must reference files in Salesforce similar to this example: <code></code> In API version 35.0 and later, the system replaces special characters in rich text with escaped HTML. In API version 34.0 and prior, all rich text appears as a plain-text representation.
OriginNetworkId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the Experience Cloud site in which a user modified the feed item or comment. This field is only available, if digital experiences is enabled for your org.
Revision	Type int Properties Filter, Group, Nillable, Sort Description The revision number of the feed item or comment.
Value	Type textarea Properties Nillable

Field Name	Details
	Description Identifies the value of the <code>EditedAttribute</code> field before the update.

Usage

This object tracks the changes made to a feed item or feed comment and stores a list of attributes that changed for each revision.

- To query the `FeedRevision` object, users need the View All Data permission or supply a WHERE clause on the `FeedEntityId`.

feedSignal

Attach feed signals, like `UpDownVote`, `UserVerified`, and `Verified`, to a feed post or comment. This object is available in API version 41.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`

Fields

Field	Details
<code>FeedEntityId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the Feed entity.
<code>FeedItemId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the feed post or comment. Possible values are: • <code>FeedItem</code> • <code>FeedComment</code>
<code>InsertedById</code>	Type reference

Field	Details
	Properties Filter, Group, Sort Description ID of user who inserted the signal. This is a relationship field. Relationship Name InsertedBy Relationship Type Lookup Refers To User
SignalType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The type of signal. Possible values are: • UpDownVote • UserVerified • Verified
SignalValue	Type int Properties Create, Filter, Group, Nillable, Sort Description The value of the signal. For example, for <code>UpDownVote</code> , the value specifies whether the signal is an upvote or a downvote.

FeedTrackedChange

Represents an individual field change or set of field changes. A `FeedTrackedChange` is a child object of a record feed, such as `AccountFeed`. This object is available in API version 18.0 and later.

Supported Calls

`describeObjects()`

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Defaulted on create, Group, Restricted picklist, Sort Description Available only for organizations with the multicurrency feature enabled. Contains the ISO currency code for the field, if <code>FieldName</code> is a currency field.
FeedItemId	Type reference Properties Filter, Group, Sort Description ID of the parent feed that tracks the field change.
FieldName	Type string Properties Group, Sort Description The name of the field that was changed.  Note: This field also tracks other events that are not related to an individual field for a parent feed. These events occur as the parent record advances through its pipeline. For example, a value of <code>leadConverted</code> indicates that a lead has been converted to an opportunity. For a full list of values, see Tracking of Special Events.
NewValue	Type anyType Properties Nillable, Sort Description The new value of the field that was changed.
OldCurrencyIsoCode	Type string Properties Group, Nillable, Sort Description Available only for organizations with the multicurrency feature enabled. Contains the ISO currency code for the <code>OldValue</code> field, if <code>FieldName</code> is a currency field.

Field	Details
OldValue	Type anyType Properties Nillable, Sort Description The last value of the field before it was changed.

Usage

A user can subscribe to a record or to another user. Changes to the record and updates from the users are displayed in the Chatter feed on the user's home page, which is a useful way to stay up-to-date with other users and with changes made to records in Salesforce. Feeds are available in API version 18.0 and later.

If you move a custom field to the Recycle Bin, all FeedTrackedChange records that track historical changes to the custom field are automatically deleted and are not restored if the custom-field is undeleted.

The following sections outline the difference between standard feeds and custom feeds.

Standard Feeds

A standard feed is a record feed, such as AccountFeed. FeedTrackedChange records for standard feeds can only be queried via the parent feed object.

Note the following when working with standard feed items:

- Feed items for standard feeds are read only in the API.
- A FeedTrackedChange record is visible when you have read access on the record feed, and when the field is visible in the field-level security settings.

Custom Feeds

If you want more control over the information provided in a record feed, such as AccountFeed, you can create a custom feed. A custom feed can replace or augment an existing record feed. For example, you might want to:

- Disable the standard account record feed and use an Apex trigger to generate FeedTrackedChange records for the events that you want to track in the feed instead.
- Augment the standard contact record feed by writing an API client that inserts feed items for events that are not tracked in the standard feed.

Tracking of Special Events

The `FieldName` field also tracks other events that are not related to an individual field for a parent feed. These events occur as the parent record advances through its pipeline. For example, a value of `LeadConverted` indicates that a lead has been converted to an opportunity.

Valid values for the `FieldName` field for multiple objects:

- `created`

- ownerAccepted
- ownerAssignment

Additional valid values for the `FieldName` field for individual objects:

Account

- accountCreatedFromLead
- accountMerged
- accountUpdatedByLead
- personAccountUpdatedByLead

Case

- closed
- ownerEscalated

Contact

- contactCreatedFromLead
- contactMerged
- contactUpdatedByLead

Contract

- contractActivation
- contractApproval
- contractConversion
- contractExpiration
- contractTermination

Lead

- leadConverted
- leadMerged

Opportunity

- opportunityCreatedFromLead

SEE ALSO:

[Custom Object __Feed __Feed](#)

FieldHistoryArchive

Represents field history values for all objects that retain field history. `FieldHistoryArchive` is a big object, available only to users with the “Retain Field History” permission. This object is available in API version 29.0 and later.

Each instance of the `FieldHistoryArchive` object represents a single change in the value of a field. `FieldHistoryArchive` stores history for both standard and custom fields.

The `Field` field returns the name of the field unless the parent field or object is deleted, in which case it returns the field ID. You can use the ID to retrieve the old field and object name from the `FieldNameAfterArchival` and `ParentNameAfterArchival` fields, respectively.

Supported Calls

`describeSObjects()`, `query()`

Fields

Field Name	Details
ArchiveFieldName	Type string Properties Nillable Description The name of the field at the time the data was archived. If the field name changed, the name is sometimes not the same for all records related to a single field.
ArchiveParentName	Type string Properties Nillable Description The name of the parent object at the time the data was archived. If the object name changed, the name is sometimes not the same for all records related to a single field.
ArchiveParentType	Type string Properties Nillable Description The type of the field at the time the data was archived. If the field type changed, the type is sometimes not the same for all records related to a single field.
ArchiveTimestamp	Type dateTime Properties Nillable Description The date and time at which the data was archived.
CreatedById	Type reference Properties Nillable

Field Name	Details
	Description The user ID of the user who created the original record.
CreatedDate	Type dateTime Properties Nillable, Sort Description The date and time at which the original record was created.
Field	Type picklist Properties Restricted picklist Description The name of the field that was changed. If the field is deleted from the parent object, the <code>Field</code> field contains the field ID instead.
FieldHistoryType	Type picklist Properties Filter, Nillable, Restricted picklist, Sort Description The name of the object that contains the field history. Possible values are: - Account - Article - Asset - AuthorizationFormConsent – Available in version 58.0 and later. - Case - CommSubscriptionConsent – Available in version 58.0 and later. - Contact - ContactPointConsent – Available in version 58.0 and later. - ContactPointTypeConsent – Available in version 58.0 and later. - Contract - ContractLineItem - Crisis - Employee - EmployeeCrisisAssessment - Entitlement - Individual

Field Name	Details
	- InternalOrganizationUnit - Knowledge - Lead - Opportunity - Order - OrderItem - PartyConsent – Available in version 58.0 and later. - Pricebook2 - PricebookEntry - Product2 - ServiceAppointment - ServiceContract - Solution - WorkOrder - WorkOrderLineItem
HistoryId	Type reference Properties Filter, Sort Description The ID of the relevant history object (for example, AccountHistory). This field is available in versions 42.0 and later.
Id	Type ID Properties Defaulted on create, Filter, idLookup Description The ID of the archived record. It's useful to have a field's ID for fields that you've deleted. (Field names aren't retained in history when you delete fields from Salesforce.)
NewValue	Type anyType Properties Nillable Description The new value of the modified field.

Field Name	Details
OldValue	Type anyType Properties Nillable Description The previous value of the modified field.
ParentId	Type reference Properties Filter, Sort Description The ID of the object that contains the field (the parent object).

Usage

When sorting fields, order them as follows:

1. FieldHistoryType ASC
2. ParentID ASC
3. CreatedDate DESC

SEE ALSO:

[Developer Guide:Big Objects Implementation Guide](#)

FieldChangeSnapshot

Use this virtual object to learn which opportunities' close dates changed during the specified time period. This object is available in API version 52.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To use FieldChangeSnapshot, set up historical trend reporting for opportunities in your org. You must also have the Pipeline Inspection user permission and the Pipeline Inspection setting enabled.

Fields

Field	Details
CurrentValueDateOnly	Type date Properties Filter, Group, Nillable Description The current value of a date field on the opportunity.
FieldName	Type string Properties Filter, Group Description The name of the field to get the change history for. Possible values are: • CloseDate
ParentId	Type reference Properties Filter, Group Description The ID of the opportunity to get the change history for. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To Opportunity
ValidFrom	Type dateTime Properties Filter Description The date and time that specifies the beginning of the time period.
ValidTo	Type dateTime

Field	Details
	Properties Filter
	Description The date and time that specifies the end of the time period.

Usage

Use FieldChangeSnapshot to learn about the first change made to the specified opportunity during the specified time period. Subsequent changes are not returned.



Example: Suppose that last week you changed an opportunity's close date to June 1, 2021. Assuming the opportunity had the ID '006R0000XXXXXXXXXX', the following query would return the CurrentValueDateOnly of June 1, 2021:

```
Select CurrentValueDateOnly from FieldChangeSnapshot where ParentID =
'006R0000XXXXXXXXXX' and FieldName = 'CloseDate' and ValidTo = LAST_WEEK AND ValidFrom
= LAST_WEEK and CurrentValueDateOnly < 2021-07-01
```

FieldPermissions

Represents the enabled field permissions for the parent PermissionSet. This object is available in API version 24.0 and later.

To grant a user access to a field, associate a FieldPermissions record with a PermissionSet that's assigned to a user. FieldPermissions records are only supported in PermissionSet, not in Profile.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

In API version 49.0 and later, only users with the View Setup and Configuration permission can access this object.

Fields

In API version 50.0 and later, for lookup field inserts and queries, you can leave off the Id in the field name or include it. The rows returned always use the API name. For example:

```
SELECT SubjectType, Field
FROM FieldPermissions
WHERE Field='Contact.Account'
```

and

```
SELECT SubjectType, Field
FROM FieldPermissions
WHERE Field='Contact.AccountId'
```

both return

```
Contact, Contact.AccountId
```

Field Name	Details
Field	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The field's API name. This name must be prefixed with the <code>ObjectType</code>. For example, <code>Merchandise__c.Description__c</code>
ParentId	Type reference Properties Create, Filter, Group, Sort Description The <code>Id</code> of the field's parent PermissionSet. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To PermissionSet
PermissionsEdit	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If <code>true</code>, users assigned to the parent <code>PermissionSet</code> can edit this field. Requires <code>PermissionsRead</code> for the same field to be <code>true</code>.
PermissionsRead	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If <code>true</code>, users assigned to the parent <code>PermissionSet</code> can view this field. A <code>FieldPermissions</code> record must have at minimum <code>PermissionsRead</code> set to <code>true</code>, or it will be deleted.

Field Name	Details
SubjectType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The object's API name. For example, <code>Merchandise__c</code>.

Usage

FieldPermissions work similarly to ObjectPermissions. However, FieldPermissions includes a `Field` attribute to return the name of the field.

For example, the following query returns all FieldPermissions records that have at least the “Read” permission. The results include the field, object, and permission set names.

```
SELECT SubjectType, Field, PermissionsRead, Parent.Name
FROM FieldPermissions
WHERE PermissionsRead = True
```

Include the field's parent object when querying FieldPermissions. For example, to find all rows that match the Account object's `Type` field, create the following query:

```
SELECT Id, SubjectType, Field
FROM FieldPermissions
WHERE Field = 'Account.Type' AND SubjectType = 'Account'
```

To find which permission sets are backed by profiles with the Account object, you can use a query like the following example:

```
SELECT Id, ParentId, SubjectType, Field, PermissionsEdit, PermissionsRead, Parent.Name
FROM FieldPermissions
WHERE SubjectType = 'Account' and Parent.IsOwnedByProfile = true
ORDER BY SubjectType, Field
```

Both `SubjectType` and `Field` must be included in the `SELECT` line of the query. Provide the full API name of the field in the form of `SubjectType.Field` when querying for a field.



Note: When using the FieldPermission object to download records, depending on the SOQL query you use, you might not receive all expected records. Results can also appear incomplete. However, all records do download; fields that don't support field security and rows for entities not visible to the org are hidden.

Special Properties for Field Permissions

The auto-number and formula fields have special rules for how field permissions work. Both have FieldPermissions records, but inserting and updating is limited to `PermissionsRead`. `PermissionsEdit` isn't allowed for either field type, since these fields must be read-only for users.

The following field types don't return a FieldPermissions record because they are assumed to always be readable.

- `Id`
- `CreatedById`

- CreatedDate
- IsDeleted
- LastModifiedById
- LastModifiedDate
- SystemModStamp

The following field types don't return a FieldPermissions record because they are assumed to always be readable and writable.

- OwnerId
- Master-detail custom (relationship) fields
- Universally required custom fields

As a result, the following query returns no records, even though users do have some access to some of the fields.

```
SELECT Field, SubjectType, PermissionsRead
FROM FieldPermissions
WHERE Field='Id'
```

To determine if a field can return a FieldPermissions record, you can call a `describeSObject()` on the field. For example, `describeSObject('Merchandise__c')`, returns all the properties of the Merchandise custom object, including field properties. If you use a field whose `permissionable` property is `false` (like the field types listed in this section), you can't query, insert, update, or delete field permissions records, because they don't exist.

If the View All Fields object permission is enabled for an object in the permission set, the `PermissionsRead` field equals `true` for all queried fields for that object.

Working with Custom Activity Fields

While tasks and events are considered separate objects, they share a common set of activity custom fields. As a result, when a custom task field is created, a custom event field is also created, and vice versa. You can display the custom field on the event layout, task layout, or both event and task layouts.

Although custom activity fields are shared between tasks and events, you see separate FieldPermissions records for the task and event. However, changes made to one field permission record are automatically made to the other. For example, if you create a custom activity field, assign field permissions to it in a permission set, and run the following query, the query returns two records with the same permission value.

```
SELECT Field, Id, ParentId, PermissionsEdit, PermissionsRead, SubjectType
FROM FieldPermissions
WHERE SubjectType = 'event' OR SubjectType = 'task'
```

If you then update one of the records with another set of field permission values and run the query, the same permission values for both records are returned.

Nesting Field Permissions

You can nest FieldPermissions in a PermissionSet query. For example, the following returns any permission sets where "Edit Read Only Fields" is `true`. Also, the result set includes both the "Read" and "Edit" field permission on the Merchandise object. Get similar results by nesting the SOQL with a field permission query using the relationship name for field permissions: `FieldPerms`.

```
SELECT PermissionsEditReadOnlyFields,
(SELECT SubjectType, Field, PermissionsRead, PermissionsEdit
FROM FieldPerms
```



```
WHERE SubjectType = 'Merchandise__c')
FROM PermissionSet
WHERE PermissionsEditReadOnlyFields = true
```

As a result, it's possible to traverse the relationship between the PermissionSet and any child-related objects (in this case, FieldPermissions). You can do this from the PermissionSet object by using the child relationship (ObjectPerms, FieldPerms, and so on) or from the child object by referencing the PermissionSet with `Parent.permission_set_attribute`.

It's important to consider when to use a conditional `WHERE` statement to restrict the result set. To query based on an attribute on the permission set object, nest the SOQL with the child relationship. However, to query based on an attribute on the child object, you must reference the permission set parent attribute in your query.

The following two queries return the same columns with different results, based on whether you use the child relationship or parent notation.

```
SELECT PermissionsEditReadOnlyFields,
(SELECT SubjectType, Field, PermissionsRead, PermissionsEdit
FROM FieldPerms
WHERE SubjectType = 'Merchandise__c')
FROM PermissionSet
WHERE PermissionsEditReadOnlyFields = true
```

Versus:

```
SELECT SubjectType, Field, PermissionsRead, PermissionsEdit, Parent.Name,
Parent.PermissionsEditReadOnlyFields
FROM FieldPermissions
WHERE SObjectType='Merchandise__c'
```

Muting Permissions

Field permissions with a parent muting permission set act differently than those enabled in a regular permission set. For a regular permission set, if a FieldPermissions record grants full access to a field (for example, granting read and edit access), users have full access to that field.

With muting permission sets, a FieldPermissions record defines the muting of access. So if a muting permission set is set for read and edit, the read and edit access is muted.

For example, we have a permission set and a muting permission set that controls access to the Account object's fields. Each permission set has settings for the Website field.

Regular Permission Set

Field	PermissionsRead	PermissionsEdit	Result
Account.Website	true	false	The Account.Website field is read only.
Account.Website	true	true	The Account.Website field has both read and edit permissions.

Muting Permission Set

Field	PermissionsRead	PermissionsEdit	Result
Account.Website	false	true	Edit permissions on the Account.Website fields are muted.
Account.Website	true	true	Read and edit permissions on the Account.Website field are muted.

Field permissions are aggregated by combining the permissions granted by the permission set and the permissions muted by the muting permission set. For example, if you have a permission set that grants read and edit permissions for a field, and a muting permission that mutes the same field's edit permission, the result is that only the read permission is enabled.

SEE ALSO:

[PermissionSet](#)

[ObjectPermissions](#)

FieldSecurityClassification

Represents a field's data sensitivity value selected from the SecurityClassification picklist. This object is available in API version 46.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

To view this object, you need the Customize Application or Modify Data Classification permission.

Fields

Field Name	Details
ApiName	Type string Properties Filter, Group, idLookup, Sort Description The API name of the data sensitivity picklist value. Default values: - Public - Internal - Confidential

Field Name	Details
	• Restricted • MissionCritical
Description	Type textarea Properties Filter, Group, Nillable, Sort Description The description of the data sensitivity picklist value.
IsHighRiskLevel	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates that fields with this picklist value contain data highly sensitive to your company.
MasterLabel	Type string Properties Filter, Group, Nillable, Sort Description The data sensitivity picklist value. Default values: • Public • Internal • Confidential • Restricted • MissionCritical
SortOrder	Type int Properties Filter, Group, Nillable, Sort Description The value's position in the picklist.

Usage

Use this object to return information about data sensitivity values in the SecurityClassification picklist. This object is read-only, but you can update the SecurityClassification picklist using the [StandardValueSet](#) Metadata API type.

FieldServiceMobileSettings

Represents a configuration of settings that control the Field Service iOS and Android mobile app experience. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
<code>AscAutomaticMode</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Describes how status changes are handled. Possible values are: <code>Off</code>—No automatic status changes. <code>Manual</code>—The mobile worker can cancel or update the status change. <code>Timed</code>—The mobile worker has a time period to prevent the status change. When the timer ends, the status changes. <code>Automated</code>—The mobile worker is notified that the status has changed.
<code>AscCancellationTimerInSec</code>	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description For the Timed mode only. Time that the user has to cancel the appointment status change.
<code>AscCompletedStatus</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description Status that indicates that a mobile worker completed a service appointment. Possible values are: • Canceled • Cannot Complete • Completed • Dispatched • In Progress • None • Scheduled
AscOnSiteStatus	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Status that indicates that a mobile worker is at a service appointment. Possible values are: • Canceled • Cannot Complete • Completed • Dispatched • In Progress • None • Scheduled
AscRadiusInMeters	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Service appointment radius that can trigger a status change.
AscTimeLimitationInMin	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description A time period when status changes can occur, before an appointment's scheduled start time and after the scheduled end time. The time is applied only if <code>IsAscTimeLimitEnabled</code> is <code>true</code>.
AscTravelStatus	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Status that indicates that a mobile worker is traveling to a service appointment. Possible values are: • Canceled • Cannot Complete • Completed • Dispatched • In Progress • None • Scheduled
BgGeoLocationAccuracy	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The accuracy of geolocation tracking of services resources while the app is running in the background. Lowering accuracy reduces battery consumption for mobile devices. Available in API version 41.0 and later. Picklist options: • Medium—Accurate to within about 100 meters. • Coarse—Accurate to within about 1 kilometer. • Very Coarse—Accurate to within about 3 kilometers. The default value is <code>Coarse</code>.
BgGeoLocationMinUpdateFreqMins	Type int Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The frequency of geolocation polling of services resources while the app is running in the background. Less frequent polling decreases battery consumption for

Field Name	Details
	mobile devices. The label in the UI is Minimum Update Frequency of Geo Location in Minutes (Background) . Available in API version 41.0 and later.
BrandInvertedColor	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The color of toasts and the contrast color of the floating action button.
ContrastInvertedColor	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The color of secondary backgrounds in the UI.
ContrastPrimaryColor	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The color of primary text.
ContrastQuaternaryColor	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The color of secondary lines that delineate different areas of the UI.
ContrastQuinaryColor	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The color of primary backgrounds in the UI.
ContrastSecondaryColor	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field Name	Details
	Description The color of secondary text.
ContrastTertiaryColor	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The color of the icons on the settings screen and of primary lines that delineate different areas of the UI.
DaysBeforeCurrentServiceDate	Type int Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Days before the current service date during which to prime service documents for offline use.
DayAfterCurrentServiceDate	Type int Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Days after the current service date during which to prime service documents for offline use.
DefaultListViewDeveloperName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The API name of the default service appointment list view on the schedule screen.
DestinationType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Determines if the mobile worker navigates to the destination based on the address or based on the latitude and longitude. Possible values are: Address

Field Name	Details
	Latitude and Longitude The default value is Address.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The API name of the set of field service mobile settings. Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
FeedbackPrimaryColor	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The color of error messages.
FeedbackSecondaryColor	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The color of success messages.
FeedbackSelectedColor	Type string Properties Create, Defaulted on create, Group, Sort, Update Description The color indicating the user's current selection.
FutureDaysInDatePicker	Type int Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The number of days into the future that a user can select from the date picker on the schedule screen.

Field Name	Details
GeoLocationAccuracy	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The accuracy of service resource geolocation tracking. Lowering accuracy reduces battery consumption for mobile devices. Picklist values: • Fine—Accurate to within 10 meters. • Medium—Accurate to within 100 meters. • Coarse—Accurate to within 1 kilometer. The default value is Medium.
GeoLocationMinUpdateFreqMins	Type int Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The minimum number of minutes between attempts to poll geolocation.
IsAscTimeLimitEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether AscTimeLimitationInMin is applied. Default is true
IsAssignmentNotification	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Controls whether service appointment notifications are sent when the service resource is assigned the appointment. Default is false. This field is available in API version 46.0 and later.
IsDefault	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field Name	Details
	Description Indicates that the set of field service mobile settings is the default set that is automatically assigned to users. You can't make a different settings record the default, but you can modify the default settings record. Default is <code>false</code>. Available in API version 41.0 and later.
IsDispatchNotification	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Controls whether service appointment notifications are sent when the service resource is dispatched for the appointment. Default is <code>false</code>. This field is available in API version 46.0 and later.
IsLimitedLocTrackingEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description When limited tracking for Appointment Assistant is enabled, the mobile worker's location is shown only on the way to a service appointment. The default value is <code>false</code>.
IsOptimizedImageUploadEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether to configure the size of images uploaded by your mobile workers. To optimize upload speeds, you can limit your file size to a defined maximum size using the <code>OptimizeImageSizeInMb</code> field. Resizing your images affects the resolution of your images. The default value is <code>false</code>.
IsScheduleViewResourceAbsences	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether resource absences appear in the Schedule tab of the mobile app. This field is available in API version 55.0 and later.

Field Name	Details
IsSendLocationHistory	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Controls whether geolocation tracking of services resources is enabled. Default is <code>false</code>.
IsShowEditFullRecord	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Controls whether users can edit records with the field service mobile app. Default is <code>false</code>.
IsTimeSheetEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Controls whether users can access time sheets on their mobile devices (Beta). Default is <code>false</code>.
IsTimeZoneEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Controls whether the time zone of timesheet entries on the mobile app is recorded. The current time zone is recorded in the <code>LocationTimeZone</code> field of the <code>TimeSheetEntry</code> object. Default is <code>false</code>. Available in API version 50.0 and later.
IsUseSalesforceMobileActions	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Reserved for future use.

Field Name	Details
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The localization preference for a user. The format is a two letter language code and, if there's a dialect, followed by the two letter dialect, for example, <code>fr</code> for French, and <code>fr_BE</code> for Belgian French
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The label in the UI for the set of field service mobile settings. Available in API version 41.0 and later.
MaxNumberOfServiceAppointments	Type int Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Sets the maximum number of service appointments to use for offline priming of service documents. If you don't have dates on your service appointments, this setting helps to optimize offline priming in place of <code>DaysBeforeCurrentServiceDate</code> and <code>DaysBeforeCurrentServiceDate</code> fields.
MetadataCacheTimeDays	Type int Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The number of days that org metadata, such as layouts, is kept in the app's local cache of memory.
NavbarBackgroundColor	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The color of the top bar in the app.

Field Name	Details
NavbarInvertedColor	Type string Properties Create, Defaulted on create, Group, Sort, Update Description The secondary color of the tap bar in the app.
OptimizeImageSizeInMb	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Configure the size of images uploaded by your mobile workers. To optimize upload speeds, you can limit your file size to a defined maximum size. Resizing your images affects the resolution of your images. Enter 0.2 or higher. Used only if IsOptimizedImageUploadEnabled is <code>true</code>.
PastDaysInDatePicker	Type int Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The number of days into the past that a user can select from the date picker on the schedule screen.
PrimaryBrandColor	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The main branding color used throughout the UI.
QuickStatusChangeFlowName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of an existing Field Service flow with a Quick Status Change action to change the work order or service appointment status or both. This applies to flows invoked on the mobile app only. This field is available in API version 51.0 and later.

Field Name	Details
RecordDataCacheTimeMins	Type int Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The number of minutes that record data is kept in the app's local cache of memory.
SecondaryBrandColor	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The color of action buttons.
TimeIntervalSetupMins	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Controls the spacing of picklist options for time values such as when creating resource absences.
UpdateScheduleTimeMins	Type int Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The minimum number of minutes between attempts to update a user's schedule. The user's schedule might not refresh on this cadence if the user's device isn't connected to a network or doesn't have adequate battery life.

Usage

Field Service Mobile settings allow you to create sets of settings to apply to different field service mobile users. The settings apply to both the Android and iOS versions of the app.

For example, suppose you want to accommodate workers that are color blind, or who work in dark or bright conditions. You can choose different branding options for different workers to suit their needs, and assign them to their profiles.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

FieldServiceMobileSettingsChangeEvent (API version 55.0)

Change events are available for the object.

FieldServiceOrgSettings

Represents the org settings for Field Service, such as Appointment Assistant settings. If Field Service is enabled, the org contains one read-only record of this object. This object is available in API version 51.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

To see this object, Field Service must be enabled. For specified fields in the table, Appointment Assistant must also be enabled.

Fields

Field	Details
ApptAssistantExpiration	Type int Properties Filter, Group, Nillable, Sort Description The expiry time in minutes of when the customer stops seeing the mobile worker's location. Appointment Assistant must also be enabled to see this field.
ApptAssistantInfoUrl	Type string Properties Filter, Group, Nillable, Sort Description The page URL that enables Appointment Assistant. Appointment Assistant must also be enabled to see this field.
ApptAssistantRadiusUnit	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The unit of the radius of the service appointment that prompts the Last Mile event for Appointment Assistant. Appointment Assistant must also be enabled to see this field.

Field	Details
	Possible values are: • Kilometer • Meter • Mile • Yard
ApptAssistantRadiusValue	Type int Properties Filter, Group, Nillable, Sort Description The radius of the service appointment that prompts the Last Mile event for Appointment Assistant. Appointment Assistant must also be enabled to see this field.
ApptAssistantStatus	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Sort Description The value that prompts the En Route event for Appointment Assistant. Appointment Assistant must also be enabled to see this field. Possible values are: • Canceled • Cannot Complete • Completed • Dispatched • In Progress • None • Scheduled • TestSharing The default value is 'None'.
CanPopulateGoogleAddress	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Allows desktop and mobile to send geolocation and map data to Google and Apple. Available in API version 57.0 and later. The default value is <code>true</code>.

Field	Details
CanSendAppCenterCrashReports	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Allows Salesforce to send crash reports to Microsoft App Center. Available in API version 57.0 and later. The default value is <code>true</code>.
CanStoreMobileAnalytics	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Allows third parties to store mobile analytics. Available in API version 57.0 and later. The default value is <code>true</code>.
DeveloperName	Type string Properties Filter, Group, Sort Description The unique name of the object in the API.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
DoesAvlCalcInclOvertime	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Specifies whether overtime is included in work capacity availability calculations. Available in API version 59.0 and later. The default value is <code>false</code>.
DoesAvlCalcInclPrimOnly	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Specifies if primary members only are included in work capacity availability calculations. If the value is <code>false</code> both primary and secondary members of the service territory are included. Available in API version 59.0 and later. The default value is <code>false</code>.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language of the field service org settings. The format for the values is a two-letter language code in small letters, for example, <code>fr</code> for French. If the language has regional dialects, add the two-letter country code in capital letters, for example, use <code>fr_BE</code> for Belgian French.
MasterLabel	Type string Properties Filter, Group, Sort Description The label of the field service org settings.

FileSearchActivity

Represents search activity on a file. This object is available in API version 38.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
AvgNumResults	Type double Properties Filter, Sort

Field	Details
	Description The number of search results returned for the search term. If Period is also included, this value is aggregated based on the time period specified.
ClickRank	Type double Properties Filter, Nillable, Sort Description The order that the file appeared in the search results when users clicked it from the list of results.
CountQueries	Type int Properties Filter, Group, Sort Description The number of searches for the period (day, month, or year).
CountUsers	Type int Properties Filter, Group, Sort Description The number of individual users who clicked the file.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of search activity.
Period	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The time period that the search count is applied to. For example, a record where the Count is 70 and the Period is Monthly indicates that 70 searches took place over the past month. Totals are aggregated daily for the current month, monthly from the past full month through the past full year, and yearly beyond that.

Field	Details
	Possible values are: • DAY • MONTH • YEAR
QueryDate	Type date Properties Filter, Group, Sort Description The date of the search.
QueryLanguage	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language filter that's applied to the user's search.
SearchTerm	Type string Properties Filter, Group, Sort Description The first 100 characters of the search term that was used to search published files.

FiscalYearSettings

Settings to define a custom or standard fiscal year for your organization. This object has a parent-child relationship with the Period object.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

As of Spring '20 and later, only partner users and standard users can access this object.

Fields

Field	Details
Description	Type string Properties Filter, Group, Nillable, Sort Description Description of the setting.
EndDate	Type date Properties Filter, Group, Nillable, Sort Description End date of the fiscal year.
IsStandardYear	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the fiscal year is a standard calendar year (<code>true</code>) or a custom fiscal year (<code>false</code>).
Name	Type string Properties Filter, Group, idLookup, Sort Description A name for the fiscal year. Limit: 80 characters.
PeriodId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the associated fiscal period.
PeriodLabelScheme	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description The numbering scheme used for fiscal periods.
PeriodPrefix	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Sort Description The prefix of fiscal periods. For example, if <i>p</i> is the prefix, then the first period is "P1."
QuarterLabelScheme	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The numbering scheme used for fiscal quarters.
QuarterPrefix	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Sort Description The prefix of fiscal quarters. For example, if "Q" is the prefix, then the fourth quarter would be "Q4."
StartDate	Type date Properties Filter, Group, Nillable, Sort Description Start date of the fiscal year.
WeekLabelScheme	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The numbering scheme used for weeks.
WeekStartDay	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort
	Description The name of the day that starts the week, for example <code>Monday</code> or <code>Sunday</code>
YearType	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description Indicates one of two types of fiscal years, Standard or Custom. Standard denotes the standard Gregorian calendar, while Custom means a fiscal year with a custom structure.

SEE ALSO:

[Period](#)

[Overview of Salesforce Objects and Fields](#)

FldSvcObjChg

Represents a change made to one of a service appointment's tracked fields. This object is available in API version 63.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

- Field Service must be enabled.
- The Field Service managed package must be installed.
- The **Track the lifecycle of service appointments** setting in **Setup > Field Service Settings** must be enabled.
- The Platform Integration User must have the Manage Service Appointment Lifecycle and the View Service Appointment Lifecycle permissions.
- To view this object, users must have the View Service Appointment Lifecycle user permission.

Fields

Field	Details
Activity	Type picklist

Field	Details
	Properties Filter, Group, Nillable, Restricted picklist, Sort Description The available scheduling activities for the service appointment. Possible values are: • AddedToBundle—Currently not supported • BundleMemberAdded—Currently not supported • BundleMemberRemoved—Currently not supported • Created • Deleted • RemovedFromBundle—Currently not supported • Rescheduled—An appointment is considered rescheduled if a change is made to its assigned service resource or to its scheduled start time. • Scheduled • ServiceResourceAssigned • StatusChanged—The service appointment status was changed. The manual activities of scheduling, rescheduling, and unscheduling are also reported as status changes because they change the status of an appointment. • Unscheduled • Updated—Captures changes made to one or more of the tracked scheduling fields that aren't associated with another activity.
ActivityDetails	Type string Properties Filter, Nillable, Sort Description Details about the scheduling activity such as the scheduling policy that was used and the unscheduling reason (when applicable).
ActivityTimeStamp	Type dateTime Properties Filter, Nillable, Sort Description Date and time of when the change to the service appointment was made.
IsPrimary	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Indicates whether the change was made directly to the service appointment or indirectly. If the change was made directly to the appointment, it's flagged as Primary. If it was made to another appointment and affected this one, it's flagged as Secondary.
OriginalSvcAppointment	Type string Properties Filter, Group, Nillable, Sort Description The ID of the service appointment that was changed. The field value isn't deleted when the Service Appointment object is deleted.
ServiceAppointmentId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the service appointment that was changed. Because this is a relationship field, the field value is deleted when the Service Appointment object is deleted. This field is a relationship field. Relationship Name ServiceAppointment Relationship Type Lookup Refers To ServiceAppointment
TimeZone	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The time zone of the service appointment or the assigned resource.
Transaction	Type string Properties Filter, Nillable, Sort

Field	Details
	Description The last transaction ID of the scheduling and optimization request that updated this object. The transaction ID is automatically generated and populated by the Enhanced Scheduling and Optimization engine.
UserId	Type reference Properties Filter, Group, Nillable, Sort Description The user who made the change to the service appointment. If an activity is a scheduled job, it's registered with the System Administrator user who configured it. This field is a relationship field. Relationship Name User Relationship Type Lookup Refers To User

SEE ALSO:

[FldSvcObjChgDtl](#)

FldSvcObjChgDtl

Represents the details of a change made to one of a service appointment's tracked fields. This object is available in API version 63.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

- Field Service must be enabled.
- The Field Service managed package must be installed.
- The **Track the lifecycle of service appointments** setting in **Setup > Field Service Settings** must be enabled.
- The Platform Integration User must have the Manage Service Appointment Lifecycle and the View Service Appointment Lifecycle permissions.
- To view this object, users must have the View Service Appointment Lifecycle user permission.

Fields

Field	Details
FieldChangedName	Type string Properties Filter, Group, Sort Description The API name of the field that was changed.
FieldChangedValue	Type string Properties Filter, Nillable, Sort Description The updated value of the field that was changed.
FldSvcObjChgId	Type reference Properties Filter, Group, Sort Description The parent record associated with the details of the change. The parent record has multiple detail records associated with it. Each record includes the name and the current value of the tracked fields. This field is a relationship field. Relationship Name FldSvcObjChg Relationship Type Lookup Refers To FldSvcObjChg

SEE ALSO:

[FldSvcObjChg](#)

FlexQueueItem

Represents an asynchronous Apex job in the Apex flex queue. Provides information about the job type and flex queue position of the AsyncApexJob. This object is available in API version 36.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

In API version 49.0 and later, users must have the View Setup and Configuration permission to access this object.

Fields

Field Name	Description
<code>AsyncApexJobId</code>	Type reference Properties Filter, Group, Sort Description The ID of an AsyncApexJob that's waiting in the flex queue. This is a relationship field. Relationship Name <code>AsyncApexJob</code> Relationship Type Lookup Refers To <code>AsyncApexJob</code>
<code>FlexQueueItemId</code>	Type string Properties Filter, Group, Nillable, Sort Description The primary key for this <code>FlexQueueItem</code>.
<code>JobPosition</code>	Type int Properties Filter, Group, Sort Description The position in the flex queue of the waiting job. The highest-priority job in the queue is at position 0.
<code>JobType</code>	Type picklist

Field Name	Description
	Properties Filter, Group, Restricted picklist, Sort
	Description The type of the job. Valid values are: • ApexToken • BatchApex • BatchApexWorker • Future • Queueable • ScheduledApex • SharingRecalculation • TestRequest • TestWorker Currently, queries are supported only on BatchApex jobs.

Usage

To find the position of an AsyncApexJob in the flex queue, query `JobPosition`. For example:

```
SELECT JobPosition FROM FlexQueueItem WHERE JobType = 'BatchApex' AND AsyncApexJobId = '707xx000000DABC'
```

To find the job at a given position, query `AsyncApexJobId`. For example:

```
SELECT AsyncApexJobId FROM FlexQueueItem WHERE JobType = 'BatchApex' AND JobPosition = '2'
```

To find all batch jobs in the flex queue, query `JobType`. To get other information about the jobs, include `AsyncApexJob` in your query. For example:

```
SELECT JobType, JobPosition, AsyncApexJob.ApexClass.Name, AsyncApexJob.CreatedDate, AsyncApexJob.CreatedById FROM FlexQueueItem WHERE JobType='BatchApex' AND AsyncApexJob.ApexClass.Name LIKE '%BatchAJob%' ORDER BY JobPosition DESC
```

FlowDefinitionView

Represents the description of a flow definition. This object is available in API version 46.0 and later.

Supported Calls

`describeSObjects(), query()`

Fields

Field	Details
ActiveVersionId	Type string Properties Filter, Group, Nillable, Sort Description The ID of the active flow version.
ApiName	Type string Properties Filter, Group, Nillable, Sort Description The API name of the flow definition.
ApiVersion	Type string Properties Filter, Group, Nillable, Sort Description The API version of the flow definition. Available in API version 59.0 and later.
AreMetricsLoggedToDataCloud	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this flow's metrics are logged in Data Cloud. The default value is false. This field is available in API version 63.0 and later.
Builder	Type string Properties Filter, Group, Nillable, Sort Description The name of the tool that created this flow. Possible values are: • Cloud Flow Designer • Flow Builder • Swing Designer

Field	Details
	This field is available in API version 47.0 and later.
CapacityCategory	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The category that determines the usage limits of the flow. Possible values are: Marketing Cloud Flow This field is available in API version 62.0 and later.
Description	Type string Properties Filter, Group, Nillable, Sort Description Flow definition information, specified by the org's admin.
DurableId	Type string Properties Filter, Group, Nillable, Sort Description The ID of the flow definition.
Environments	Type multipicklist Properties Filter, Nillable Description The environment in which the flow can run. Valid values are: Default—The flow can run from a Visualforce component, Lightning page, flow action, or custom Aura component. Offline—The flow can run only offline. Flow types that support offline flows must set this value. This value is available in API version 62.0 and later. Slack—The flow can run in Slack and the default environment. You specify the Slack flow environment when you save the flow. This field is available in API version 55.0 to 62.0. This field is deprecated in API version 63.0 and later.

Field	Details
HasAsyncAfterCommitPath	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the scheduled path runs asynchronously after a save. The default value is false. This field is available in API version 54.0 and later.
InstalledPackageName	Type string Properties Filter, Group, Nillable, Sort Description The name of the installed package that includes this flow definition. This field is available in API version 47.0 and later.
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the latest version of the flow definition is the active flow version. This field is available in API version 47.0 and later.
IsOutOfDate	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the active flow version is the latest version of the flow definition. This field is available in API version 47.0 and later.
IsOverridable	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the flow is overridable. The default value is false. This field is available in API version 53.0 and later.

Field	Details
IsSwingFlow	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the flow is built with Desktop Flow Designer. This field is available in API version 49.0 and later.
IsTemplate	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the process or flow is a template. The default value is <code>false</code>. When installed from managed packages, subscribers can't view or clone processes or flows because of intellectual property (IP) protection. But when those processes and flows are templates, subscribers can open them in a builder, clone them, and customize the clones. This field is available in API version 47.0 and later.
Label	Type string Properties Filter, Group, Nillable, Sort Description The label of the flow definition.
LastModifiedBy	Type string Properties Filter, Group, Nillable, Sort Description Name of the user who last updated this flow definition. This field is available in API version 47.0 and later.
LatestVersionId	Type string Properties Filter, Group, Nillable, Sort Description The ID of the latest flow version, regardless of the flow's status.

Field	Details
ManageableState	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the manageable state of the flow that is contained in a package. Possible values are: • beta • deleted • deprecated • deprecatedEditable • installed • installedEditable • released • unmanaged This field is available in API version 47.0 and later.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix associated with the flow definition.
OverriddenById	Type string Properties Filter, Nillable, Sort Description The flow that's overriding the current flow. This is a relationship field. This field is available in API version 53.0 and later. Relationship Name OverriddenBy Relationship Type Lookup Refers To FlowDefinitionView
OverriddenFlowId	Type string

Field	Details
	Properties Filter, Nillable, Sort Description The flow that the current flow is overriding. This is a relationship field. This field is available in API version 53.0 and later. Relationship Name OverriddenFlow Relationship Type Lookup Refers To FlowDefinitionView
ProcessType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of the flow. Valid values are: • ActionableEventManagermentFlow—A flow that triggers an actionable event orchestration process in the background and automatically executes different types of actions based on the event type. This value is available in API version 62.0 and later. • ActionCadenceAutolaunchedFlow—A flow that's executed when a user completes a cadence step. This value is available in API version 56.0 and later. • ActionCadenceStepFlow—A screen flow used as a cadence step. This value is available in API version 56.0 and later. • ActivityObjectMatchingFlow—A flow that launches when Einstein Activity Capture detects and captures a new activity, such as an email. This type of flow runs in the background without user interaction. This value is available with Sync Email as Salesforce Activity in API version 64.0 and later. • Appointments—A flow for Lightning Scheduler. This value is available in API version 44.0 and later. • ApprovalWorkflow—An orchestration that's used for an approval process. This value is available in API version 63.0 and later. • AutoLaunchedFlow—A flow that doesn't require user interaction. • CheckoutFlow—A flow used in Lightning B2B Commerce to create a checkout in a store. This value is available in API version 48.0 and later. • ContactRequestFlow—A flow that lets customers request to be contacted by customer support. This flow is used to create contact request records. This value is available in API version 45.0 and later. • CustomerLifecycle—A Salesforce Surveys flow that lets you associate survey questions with different stages in customer lifecycles. This value is available

Field	Details
	in API version 49.0 and later and only when the Customer Lifecycle Designer license is enabled. • CustomEvent—A process that is invoked when it receives a platform event message. In the UI, it's an event process. This value is available in API version 41.0 and later. • DataCaptureFlow— In the UI, Data Capture flows configure the Form tab in the Field Service mobile app. When the Data Capture flow is launched, its Flow metadata is publicly available in JavaScript format. This value is available in API version 62.0 and later. • DcvrFrameworkDataCaptureFlow—A screen flow that presents assessment questions from Discovery Framework. Launches when invoked by a user on a mobile device. This type of flow collects or displays information, requires user interaction, and works offline or online. This value is available in API version 62.0 and later. • EvaluationFlow—A flow for evaluating custom entry and exit conditions in an orchestration. Uses the <code>isOrchestrationConditionMet</code> output variable and discards values from any other output variables. This value is available in API version 54.0 and later. • FieldServiceMobile—A flow for the Field Service mobile app. This value is available in API version 39.0 and later. • FieldServiceWeb—A flow for embedded Appointment Booking. Its UI label is Field Service Embedded Flow. This value is available in API version 41.0 and later. • Flow—A flow that requires user interaction because it contains one or more screens or local actions, choices, or dynamic choices. In the UI and Salesforce Help, it's a screen flow. Screen flows can be launched from the UI, such as with a flow action, Lightning page, or web tab. • FSClending—A flow for Financial Services Cloud Mortgage. This value is available in API version 46.0 and later. • IdentityUserRegistrationFlow—A flow to handle user registration and updates for single sign-on with the authentication provider framework. Available in API version 64.0 and later. • IndicatorResultFlow—A flow for Outcome Management that calculates and creates indicator results for a selected indicator performance period. This value is available with the Outcome Management license in API version 60.0 and later. • IndividualObjectLinkingFlow—A flow that associates individuals with interactions such as voice calls, messaging sessions, or case-related emails. This value is available in API version 58.0 and later. • InvocableProcess—A process that another process or the Invocable Actions resource in REST API invokes. This value is available in API version 38.0 and later. • Journey—An audience-driven flow for Marketing Cloud. This value is available in API version 57.0 and later.

Field	Details
	• LoginFlow—A flow for login. This value is available in API version 51.0 and later. • LoyaltyManagementFlow—A flow for the Loyalty Management app that's invocable by loyalty program processes. This value is available in API version 54.0 and later. • Orchestrator—An orchestration that organizes flows into groups of steps contained in a series of stages. This value is available in API version 53.0 and later. • PromptFlow—A flow for Prompt Builder. Pass data between Prompt Builder and the flow. This value is available in API version 60.0 and later. • RecommendationStrategy—Build recommendations for your users. A recommendation launches its assigned flow. This value is available in API version 54.0 and later. See Flow Builder Strategies. • RoutingFlow—A flow for Salesforce Omni-Channel routing and other business logic. This value is available in API version 52.0 and later. • Survey—A flow for Salesforce Surveys. From the UI, this type of flow is created in Survey Builder. This value is available in API version 42.0 and later. • SurveyEnrich—A Salesforce Surveys flow that uses the Survey Data Mapper. From the UI, this type of flow is created in the Survey Builder and requires an associated survey flow type. This value is available in API version 49.0 or later and only when the Customer Lifecycle Designer license is enabled. • Workflow—A process that is invoked when a record is created or edited. In the UI and Salesforce Help, it's a record change process. These values are reserved for future use: • ActionPlan • AppProcess • ApprovalWorkflow • CartAsyncFlow • DigitalForm • JourneyBuilderIntegration • LoginFlow • ManagedContentFlow • OrchestrationFlow • SalesEntryExperienceFlow • TransactionSecurityFlow • UserProvisioningFlow This value has significant impact on validation when saving the flow and on the flow's runtime behavior. Don't change this value unless you understand the flow properties of the specified type. Across flow versions, you can change the type only from Flow to AutoLaunchedFlow or vice versa. Before you change the flow type, make sure that

Field	Details
	the flow contains only the elements, resources, and functionality that the new flow type supports.
RecordTriggerType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Specifies what type of record changes can start the flow. Possible values are: • Create • CreateAndUpdate • Delete • None • Update Available only when <code>triggerType</code> is <code>RecordBeforeSave</code>. This field is available in API version 54.0 and later.
SourceTemplateId	Type string Properties Filter, Nillable, Sort Description The template that the current flow was created from. This is a relationship field. This field is available in API version 53.0 and later. Relationship Name SourceTemplate Relationship Type Lookup Refers To FlowDefinitionView
SupportedEnvironments	Type string Properties Filter, Nillable Description The environment in which the flow can run. Valid values are: • <code>Default</code>—The flow can run from a Visualforce component, Lightning page, flow action, or custom Aura component. • <code>Offline</code>—The flow can run only offline. Flow types that support offline flows must set this value.

Field	Details
	• Slack—The flow can run in Slack and the default environment. You specify the Slack flow environment when you save the flow. This field is available in API version 63.0 and later.
TriggerObjectOrEventId	Type string Properties Filter, Nillable, Sort Description ID of the object or platform event that triggers this flow. This field is available in API version 53.0 and later. This is a relationship field. Relationship Name TriggerObjectOrEvent Relationship Type Lookup Refers To EntityDefinition
TriggerObjectOrEventLabel	Type string Properties Filter, Group, Nillable, Sort Description The label of the object or platform event that triggers this flow. This field is available in API version 53.0 and later.
TriggerOrder	Type int Properties Filter, Group, Nillable, Sort Description The run order of a record-triggered flow, from 1 to 2,000. See "Guidelines for Defining the Run Order of Record-Triggered Flows for an Object" in Salesforce Help. Available in API version 54.0 and later.
TriggerType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field

Details

Description

Specifies what causes the flow to run. If you exclude this field, the flow has no trigger and starts only when a user or app launches the flow. Valid values are:

- **AutomationEvent**—The flow starts when an automation event such as an SMS subscription occurs. This value is available in API version 62.0 and later.
- **Capability**—The flow starts when the specified capability that the flow integrates with is invoked. This value is available in API version 60.0 and later.
- **DataCloudDataChange**—The flow starts when data model object (DMO) or calculated insight object (CIO) conditions are met. This value is available in API version 59.0 and later.
- **DataGraphDataChange**—The flow starts when conditions are met in the specified data graph field. This value is available in API version 63.0 and later.
- **EventDrivenJourney**—Reserved for internal use.
- **ExternalSystemChange**—The flow starts when an external system change event is received. This value is available in API version 61.0 and later.
- **FormSubmissionEvent**—The flow runs when a user submits data via a webform. In Flow Builder, this value corresponds to **Form**. This value is available in API version 60.0 and later.
- **IndivRelatedRecord**—The flow starts when an object or an object with fields related to an individual is created or updated. This value is available in API version 66.0 and later.
- **PlatformEvent**—The flow starts when a platform event message is received. This value is available in API version 49.0 and later.
- **RecordAfterSave**—The flow starts after a record is saved. This value is available in API version 49.0 and later.
- **RecordBeforeDelete**—Deleting a record triggers an autolaunched flow before the record is deleted from the database. This value is available in API version 50.0 and later.
- **RecordBeforeSave**—Creating and/or updating a record triggers an autolaunched flow to make additional updates to that record before it's saved to the database. This value is available in API version 48.0 and later.
- **Scheduled**—The flow starts at the scheduled time. This value is available in API version 47.0 and later.
- **Segment**—At the scheduled time, the flow send emails to individuals included in the chosen segment. This value is available in API version 56.0 and later.

Available only when **processType** is **AutoLaunchedFlow** or **PromptFlow**. This field is available in API version 47.0 and later.

VersionNumber

Type

int

Properties

Filter, Group, Nillable, Sort

Field	Details
	Description The flow's version number. This field is available in API version 54.0 and later.

Usage

Use this object to query information about flow definitions.

FlowInterview

Represents a flow interview. A *flow interview* is a running instance of a flow. This object is available in API version 32.0 and later.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

To delete a flow interview, you must have the “Manage Flow” user permission. All other calls require the “Run Flows” user permission or the `Flow User` field enabled on the user detail page. If **Override default behavior and restrict access to enabled profiles or permission sets** is selected for an individual flow, access to that specific flow and its interviews is given to users by profile or permission set.

Fields

Field Name	Details
<code>CurrentElement</code>	Type string Properties Filter, Group, Nillable, Sort Description The flow element at which the interview is paused.
<code>CurrentFlowVersion</code>	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description For internal use only.

Field Name	Details
EngineType	Type picklist Properties Filter, Group, Sort Description The engine type used to run the flow interview.
Error	Type textarea Properties Create, Nillable, Update Description The error message that explains why the flow interview failed. This field is available in API version 62.0 and later.
FlowVersionViewId	Type string Properties Filter, Nillable, Sort Description This field is a relationship field. This field is available in API version 51.0 and later. Relationship Name FlowVersionView Relationship Type Lookup Refers To FlowVersionView
Guid	Type string Properties Filter, Group, idLookup, Nillable, Sort Description Globally unique identifier for the interview.
InterviewLabel	Type string Properties Filter, Nillable, Sort

Field Name	Details
	Description Label for the interview. This label helps users and administrators differentiate interviews from the same flow. In the user interface, this label appears in the Paused Flow Interviews component on the user's Home tab and in the list of paused flow interviews in Setup.
InterviewStatus	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Status of the interview. Valid values are: - Completed—This flow is complete. There are no more records to process. - Error—This flow has one or more errors. To resolve each error, check the error code for instructions. - Paused—This flow is paused. No new processes are added until the flow is resumed. - Running—This flow is running or is ready to run. - VersionPaused—This flow version is paused. No more records are processed until the flow is resumed. This value is available in API version 60.0 and later. This field is available in API version 50.0 and later.
MasterFlowVersion	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description For internal use only.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name for the interview.
OwnerId	Type reference Properties Filter, Group, Sort

Field Name	Details
	Description The ID of the user who owns the interview. Only this user or an admin can resume the interview. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PauseLabel	Type string Properties Filter, Nillable, Sort Description Information about why the interview was paused. This string is entered by the user who paused the flow interview. The label is Why Paused.
SerializedView	Type textarea Properties Create, Nillable, Update Description For internal use only.
WasPausedFromScreen	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Whether the flow interview was paused by a user from a flow Screen element (<code>true</code>) or not (<code>false</code>). This field is available in API version 46.0 and later.

Associated Objects

This object has these associated objects. Unless noted, these objects are available in the same API version as this object.

[FlowInterviewOwnerSharingRule](#)

Sharing rules are available for the object.

[FlowInterviewShare](#)

Sharing is available for the object.

FlowInterviewLog

Represents the logs of a screen flow interview. An *interview* is an instance of a running or previously run flow. This object is available in API version 49.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

By default, only users with the View All Data permission can access the logs for flows that are run by other users. To let users access other users' flow logs, set up sharing settings with the `FlowInterviewLogOwnerSharingRule` object.

Fields

Field Name	Details
FlowDeveloperName	Type string Properties Filter, Group, Nillable, Sort Description The flow's API name.
FlowInterviewGuid	Type string Properties Filter, Group, idLookup, Sort Description Globally unique identifier for the interview.
FlowLabel	Type string Properties Filter, Group, Nillable, Sort Description The flow's label. Only shows up in API results when users query FlowInterviewLog, or when they include this field in a report.
FlowNamespace	Type string Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description Namespace of the flow interview logged in the FlowInterviewLog.
FlowVersionNumber	Type int Properties Filter, Group, Nillable, Sort Description The number of the flow version for a flow definition. Flow versions are counted sequentially from 1.
InterviewDurationInMinutes	Type double Properties Filter, Nillable, Sort Description Total number of minutes between InterviewStartTimestamp and InterviewEndTimestamp, even if flow interview is paused.
InterviewEndTimestamp	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the interview ended.
InterviewStartTimestamp	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the interview started.
InterviewStatus	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Status of the interview. Valid values are: • Autosaved—This value is available in API version 62.0 and later. • Completed

Field Name	Details
	• <code>Error</code> • <code>Expired</code>—This value is available in API version 62.0 and later. • <code>Paused</code> • <code>Running</code> • <code>VersionPaused</code>—This value is available in API version 60.0 and later.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Autogenerated name of the flow interview log record.
OwnerId	Type reference Properties Filter, Group, Sort Description The user who owns the FlowInterviewLog record. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[FlowInterviewOwnerSharingRule](#)

Sharing rules are available for the object.

FlowInterviewLogEntry

Represents the log of a specific element that's executed by a screen flow interview. An *interview* is an instance of a running or previously run flow. This object is available in API version 49.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

By default, only users with the View All Data permission can access the log entries for flows that are run by other users.

Fields

Field Name	Details
<code>DurationSinceStartInMinutes</code>	Type double Properties Filter, Nillable, Sort Description Number of minutes that elapsed since the flow interview started, even if flow interview is paused.
<code>ElementApiName</code>	Type string Properties Filter, Group, Nillable, Sort Description API name of the flow element.
<code>ElementDurationInMinutes</code>	Type double Properties Filter, Nillable, Sort Description Number of minutes that elapsed since the element executed. For example, if a screen element takes users a long time to complete, consider simplifying the screen.
<code>ElementLabel</code>	Type string Properties Filter, Group, Nillable, Sort Description The flow element's label.
<code>FlowInterviewLogId</code>	Type reference

Field Name	Details
	Properties Filter, Group, Sort Description This field is a relationship field. Relationship Name FlowInterviewLog Relationship Type Lookup Refers To FlowInterviewLog
LogEntryTimestamp	Type datetime Properties Filter, Sort Description Date and time when the flow element started to execute.
LogEntryType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of screen flow user action triggered the log entry. Valid values are: • Error • FlowFinish-Finished Flow • FlowPause-Paused Flow • FlowResume-Resumed Flow • FlowStart-Started Flow • ScreenFinish-Clicked Finish • ScreenNext-Clicked Next • ScreenPrevious-Clicked Previous
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Autogenerated name of the flow interview log entry.

FlowInterviewLogOwnerSharingRule

Represents the rules for sharing a FlowInterviewLog with users other than the owner.This object is available in API version 49.0 and later.

Supported Calls

```
create(), delete(), describeObjects(), getDeleted(), getUpdated(), query(), retrieve(),
update(), upsert()
```

Fields

Field	Details
AccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A value that represents the type of sharing being allowed. Possible values are: - Edit—Read/Write - Read—Read Only
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description A description of the sharing rule. Maximum size is 1,000 characters.
DeveloperName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object’s name in a managed package and the changes are reflected in a subscriber’s organization. Corresponds to Rule Name in the user interface.

Field	Details
	 Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
GroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the source group.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Label of the sharing rule as it appears in the user interface. Limited to 80 characters. Corresponds to Label on the user interface.
OptionsIncludeHVUOwnedRecords	Type boolean Properties Create, Filter, Update Description
OptionsIncludeRecordsOwnedByAll	Type boolean Properties Create, Filter, Update Description
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the target user or group that's given access.

Usage

Use this object to manage the sharing rules for FlowInterviewLog records. General sharing uses this object.

FlowInterviewOwnerSharingRule

Represents the rules for sharing a FlowInterview with users other than the owner. This object is available in API version 33.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
AccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A value that represents the type of sharing being allowed. The possible values are: • Read • Edit—In API version 42.0 and later, when Let users resume shared flow interviews is enabled for your org, users can resume all flow interviews that they have edit access to.
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description A description of the sharing rule. Maximum size is 1000 characters.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Corresponds to Rule Name in the user interface.

Field	Details
	 Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
GroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the source group.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Label of the sharing rule as it appears in the user interface. Limited to 80 characters. Corresponds to Label on the user interface.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the target user or group that's given access.

Usage

Use this object to manage the sharing rules for FlowInterview records. General sharing uses this object.

In API version 42.0 and later, when **Let users resume shared flow interviews** is enabled for your org, users can resume all flow interviews that they have edit access to. When that setting is disabled, only the owner or a flow admin can resume a flow interview. To disable this setting, go to your org's Process Automation Settings in Setup.

FlowInterviewShare

Represents a sharing entry on a FlowInterview. This object is available in API version 33.0 and later.

You can only create, edit, and delete sharing entries for standard objects whose `RowCause` field is set to `Manual`. Sharing entries for standard objects with different `RowCause` values are created as a result of your Salesforce org's sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren't stored at all.

 **Note:** While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it's possible that we'll stop storing certain share records to improve performance. As a best practice, don't create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

The properties available for some fields depend on the default organization-wide sharing settings. The properties listed are true for the default settings of such fields.

Field	Details
<code>AccessLevel</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Level of access that the User or Group has to the FlowInterview. The possible values are: • <code>Read</code> • <code>Edit</code>—In API version 42.0 and later, when Let users resume shared flow interviews is enabled for your org, users can resume all flow interviews that they have edit access to. • <code>All</code>—This value is not valid for creating or deleting records.
<code>ParentId</code>	Type reference Properties Create, Filter, Group, Sort Description ID of the FlowInterview associated with this sharing entry. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To FlowInterview
<code>RowCause</code>	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is <code>Manual</code>. If no value is specified, the field defaults to <code>Manual</code>. All other <code>RowCause</code> values are read-only. After the sharing entry is created, this field can't be edited. Valid values include: <code>Manual</code>—The User or Group has access because a user with "All" access manually shared the <code>FlowInterview</code> with them. <code>Owner</code>—The User is the owner of the <code>FlowInterview</code>. <code>Rule</code>—The User or Group has access via a <code>FlowInterview</code> sharing rule. <code>GuestRule</code>—The User or Group has access via a <code>FlowInterview</code> guest user sharing rule.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the User or Group that has been given access to the <code>FlowInterview</code>. This field can't be updated. This is a polymorphic relationship field. Relationship Name UserOrGroup Relationship Type Lookup Refers To Group, User

Usage

This object lets you determine which users and groups can view and edit flow interviews that are owned by other users.

In API version 42.0 and later, when **Let users resume shared flow interviews** is enabled for your org, users can resume all flow interviews that they have edit access to. When that setting is disabled, only the owner or a flow admin can resume a flow interview. To disable this setting, go to your org's Process Automation Settings in Setup.

FlowNavMetricEventLog

Flow Navigation Metric event logs contain metric data for flow interviews such as total execution time, number of interviews, and number of errors. This object is available in API version 61.0 and later.

 **Note:** This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
<code>BotIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The ID of the bot.
<code>BotSessionIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The bot session ID.
<code>ErrorCount</code>	Type int Properties Filter, Nillable, Sort Description The number of errors for all flow interviews after the flow version was executed.
<code>FlowLoadTime</code>	Type double Properties Filter, Nillable, Sort Description The time in milliseconds to load the flow's metadata.

Field	Details
FlowVersionIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the flow version that was executed.
InterviewCount	Type int Properties Filter, Nillable, Sort Description The number of flow interviews that started after the flow version was executed.
PlannerIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the agent planner.
ProcessType	Type string Properties Filter, Group, Nillable, Sort Description The type of the flow. Valid values are: • ActionableEventManagermentFlow—A flow that triggers an actionable event orchestration process in the background and automatically executes different types of actions based on the event type. This value is available in API version 62.0 and later. • ActionCadenceAutolaunchedFlow—A flow that's executed when a user completes a cadence step. This value is available in API version 56.0 and later. • ActionCadenceStepFlow—A screen flow used as a cadence step. This value is available in API version 56.0 and later. • ActivityObjectMatchingFlow—A flow that launches when Einstein Activity Capture detects and captures a new activity, such as an email. This type of flow runs in the background without user interaction. This value is available with Sync Email as Salesforce Activity in API version 64.0 and later. • Appointments—A flow for Lightning Scheduler. This value is available in API version 44.0 and later. • ApprovalWorkflow—An orchestration that's used for an approval process. This value is available in API version 63.0 and later.

Field	Details
	• AutoLaunchedFlow—A flow that doesn't require user interaction. • CheckoutFlow—A flow used in Lightning B2B Commerce to create a checkout in a store. This value is available in API version 48.0 and later. • ContactRequestFlow—A flow that lets customers request to be contacted by customer support. This flow is used to create contact request records. This value is available in API version 45.0 and later. • CustomerLifecycle—A Salesforce Surveys flow that lets you associate survey questions with different stages in customer lifecycles. This value is available in API version 49.0 and later and only when the Customer Lifecycle Designer license is enabled. • CustomEvent—A process that is invoked when it receives a platform event message. In the UI, it's an event process. This value is available in API version 41.0 and later. • DataCaptureFlow— In the UI, Data Capture flows configure the Form tab in the Field Service mobile app. When the Data Capture flow is launched, its Flow metadata is publicly available in JavaScript format. This value is available in API version 62.0 and later. • DcvrFrameworkDataCaptureFlow—A screen flow that presents assessment questions from Discovery Framework. Launches when invoked by a user on a mobile device. This type of flow collects or displays information, requires user interaction, and works offline or online. This value is available in API version 62.0 and later. • EvaluationFlow—A flow for evaluating custom entry and exit conditions in an orchestration. Uses the <code>isOrchestrationConditionMet</code> output variable and discards values from any other output variables. This value is available in API version 54.0 and later. • FieldServiceMobile—A flow for the Field Service mobile app. This value is available in API version 39.0 and later. • FieldServiceWeb—A flow for embedded Appointment Booking. Its UI label is Field Service Embedded Flow. This value is available in API version 41.0 and later. • Flow—A flow that requires user interaction because it contains one or more screens or local actions, choices, or dynamic choices. In the UI and Salesforce Help, it's a screen flow. Screen flows can be launched from the UI, such as with a flow action, Lightning page, or web tab. • FSClending—A flow for Financial Services Cloud Mortgage. This value is available in API version 46.0 and later. • IdentityUserRegistrationFlow—A flow to handle user registration and updates for single sign-on with the authentication provider framework. Available in API version 64.0 and later. • IndicatorResultFlow—A flow for Outcome Management that calculates and creates indicator results for a selected indicator performance period. This value is available with the Outcome Management license in API version 60.0 and later. • IndividualObjectLinkingFlow—A flow that associates individuals with interactions such as voice calls, messaging sessions, or case-related emails. This value is available in API version 58.0 and later. • InvocableProcess—A process that another process or the Invocable Actions resource in REST API invokes. This value is available in API version 38.0 and later.

Field	Details
	• Journey—An audience-driven flow for Marketing Cloud. This value is available in API version 57.0 and later. • LoginFlow—A flow for login. This value is available in API version 51.0 and later. • LoyaltyManagementFlow—A flow for the Loyalty Management app that's invocable by loyalty program processes. This value is available in API version 54.0 and later. • Orchestrator—An orchestration that organizes flows into groups of steps contained in a series of stages. This value is available in API version 53.0 and later. • PromptFlow—A flow for Prompt Builder. Pass data between Prompt Builder and the flow. This value is available in API version 60.0 and later. • RecommendationStrategy—Build recommendations for your users. A recommendation launches its assigned flow. This value is available in API version 54.0 and later. See Flow Builder Strategies. • RoutingFlow—A flow for Salesforce Omni-Channel routing and other business logic. This value is available in API version 52.0 and later. • Survey—A flow for Salesforce Surveys. From the UI, this type of flow is created in Survey Builder. This value is available in API version 42.0 and later. • SurveyEnrich—A Salesforce Surveys flow that uses the Survey Data Mapper. From the UI, this type of flow is created in the Survey Builder and requires an associated survey flow type. This value is available in API version 49.0 or later and only when the Customer Lifecycle Designer license is enabled. • Workflow—A process that is invoked when a record is created or edited. In the UI and Salesforce Help, it's a record change process. These values are reserved for future use. • ActionPlan • AppProcess • ApprovalWorkflow • CartAsyncFlow • DigitalForm • JourneyBuilderIntegration • LoginFlow • ManagedContentFlow • OrchestrationFlow • SalesEntryExperienceFlow • TransactionSecurityFlow • UserProvisioningFlow
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestId</code> . For example: <code>TID:000000000000c00fff</code> .
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The time that the flow was executed in GMT. For example, <code>2020-01-20T19:12:26.965Z</code> . Milliseconds are the most granular setting.
TotalExecutionTime	Type double Properties Filter, Nillable, Sort Description The total time in milliseconds to start and finish all flow interviews.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who executed the flow through the UI or the API. For example: <code>00530000009M943</code> .

FlowOrchestration

Represents the details of an orchestration definition. This object is available in API version 62.0 and later.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`

Fields

Field	Details
ActiveVersionId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the active orchestration version. This field is a relationship field. This field is a relationship field. Relationship Name ActiveVersion Refers To FlowOrchestrationVersion
ApiName	Type string Properties Filter, Group, Nillable, Sort Description The API name of the the orchestration.
ApiVersion	Type int Properties Filter, Group, Nillable, Sort Description The API version of the active orchestration or the last saved orchestration.
AverageRunTime	Type int Properties Filter, Group, Nillable, Sort Description The average duration of an orchestration run that has completed without error.
CompletionRate	Type percent Properties Filter, Nillable, Sort Description The percentage of the total number of orchestration runs that have completed without error.

Field	Details
Description	Type textarea Properties Nillable, Update Description The description of the flow orchestration.
FailedRunCount	Type int Properties Filter, Group, Nillable, Sort Description The number of orchestration runs that have failed.
InstalledPackageName	Type string Properties Filter, Group, Nillable, Sort Description The API name of the installed package that the orchestration is a part of.
IsCitizenEnabled	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the orchestration can be modified by non-admins. Valid value is False. The default value is <code>false</code>.
IsOverridable	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the orchestration that's part of a managed package is overridable. The default value is <code>false</code>.
IsTemplate	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Indicates whether the orchestration record is a template. The default value is <code>false</code> .
<code>LastReferencedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
<code>LastViewedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record.
<code>ManageableState</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Specifies the manageable state of the orchestration that's contained in a package. Valid values are: • <code>beta</code>—Managed-Beta • <code>deleted</code>—Managed-Proposed-Deleted • <code>deprecated</code>—Managed-Proposed-Deprecated • <code>deprecatedEditable</code>—SecondGen-Installed-Deprecated • <code>installed</code>—Managed-Installed • <code>installedEditable</code>—SecondGen-Installed-Editable • <code>released</code>—Managed-Released • <code>unmanaged</code>—Unmanaged
<code>Name</code>	Type string Properties Filter, Group, idLookup, Sort, Update Description The label of the orchestration.

Field	Details
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix associated with the orchestration record.
OrchestrationDefinition	Type string Properties Filter, Group, Nillable, Sort Description Represents the orchestration definition.
OrchestrationLabel	Type string Properties Filter, Group, Nillable, Sort, Update Description The label of the orchestration.
OrchestrationType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The orchestration's flow type. FlowType consolidates ProcessType and TriggerType into one field. FlowType is used with permissions, so admins can control access to each flow type. Valid values are: - OrchAutoInch—Autolaunched No Trigger Orchestration: Launches when invoked by Apex, REST API, custom buttons, or custom links. An orchestration lets you create a multi-step, multi-user process. - OrchRecTrigAftSave—Record-Triggered After Save Orchestration: Launches when a record is created or updated. An orchestration lets you create a multi-step, multi-user process. This type of flow runs in the background without user interaction. - CmsOrchAutoInch —CMS Workflow Orchestration Autolaunched: Launches when invoked from the Workflows component in a CMS workspace. This type of orchestration lets you create a multi-step, multi-user process to create, edit, organize, and manage digital content from a centralized location
OverriddenById	Type reference

Field	Details
	Properties Filter, Group, Nillable, Sort Description The ID of the orchestration that's overriding the current orchestration. This field is a relationship field. Relationship Name OverriddenBy Refers To FlowOrchestration
OverriddenOrchestrationId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the orchestration that the current orchestration is overriding. This field is a relationship field. Relationship Name OverriddenOrchestration Refers To FlowOrchestration
RunCount	Type int Properties Filter, Group, Nillable, Sort Description The number of orchestration runs that have been started across all orchestration versions.
SourceTemplateId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the template that the orchestration was created from. This field is a relationship field. Relationship Name SourceTemplate Refers To FlowOrchestration

Field	Details
Status	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The status of the record. Valid values are: • <code>Active</code>—Active • <code>Draft</code>—Inactive • <code>InvalidDraft</code>—Draft • <code>Obsolete</code>—Inactive • <code>UnderReview</code>—Under Review
TriggerType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Specifies the trigger type for a record-triggered orchestration. Valid values are: • <code>RecordAfterSave</code>—Record—Run After Save

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[FlowOrchestrationChangeEvent](#) on page 68

Change events are available for the object.

FlowOrchestrationInstance

Represents a run-time instance of an orchestration. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

If sharing rules are defined for FlowOrchestrationInstance, they determine access to specific orchestration run records. Or the user must have the View All Data permission.

Fields

Field	Details
AuxiliaryTriggeringRecord	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The related object ID or service appointment ID. This field isn't used by flow approval processes or orchestrations. This field is available in API version 65.0 and later.
CurrentStage	Type string Properties Filter, Group, Nillable, Sort Description The API name of the stage that was running when the orchestration run was paused or failed because of an error in an action called by a step. This field is available in API version 62.0 and later.
Duration	Type long Properties Filter, Group, Nillable, Sort Description The duration of the orchestration instance in seconds. Durations are incremented until the orchestration is completed, canceled, or ends in an error. This field is available in API version 62.0 and later.
FlowDefinitionVersionName	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The fully qualified API name of the underlying orchestration. Possible values are active flow approval processes and orchestrations in the org. This field is available in API version 62.0 and later.

Field	Details
FlowType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The flow type of the orchestration that created the orchestration work item. Valid values are: - ApprovalOrchAutoInch—Autolaunched Flow Approval Process - ApprovalOrchRecTrigAftSave—Record-Triggered After Save Flow Approval Process - ExtSysChgFlowAppv1—External System Change-Triggered Flow Approval Process - ExtSysChgOrch—External System Change-Triggered Orchestration - OrchAutoInch—Autolaunched No Trigger Orchestration - OrchRecTrigAftSave—Record-Triggered After Save Orchestration This field is available in API version 62.0 and later.
InterviewId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The globally unique flow interview ID associated with the orchestration instance. This field is a relationship field. Relationship Name Interview Relationship Type Lookup Refers To FlowInterview
IsDebugRun	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the instance was executed from a debug run. The default value is <code>false</code>. This field is available in API version 65.0 and later.
LastReferencedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The most recent time a user viewed a record related to the orchestration run. This field is available in API version 55.0 and later.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The most recent time a user viewed the orchestration run. This field is available in API version 55.0 and later.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name for the orchestration instance.
OrchestrationDeveloperName	Type string Properties Filter, Group, Nillable, Sort Description The developer name of the flow definition associated with the orchestration run. This field is available in API version 55.0 and later.
OrchestrationLabel	Type string Properties Filter, Group, Nillable, Sort Description The label of the orchestration. This field is available in API version 63.0 and later.
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the automated process user. This field is available in API version 56.0 and later.

Field	Details
	Relationship Name Owner
	Relationship Type Lookup
	Refers To User
Status	Type picklist
	Properties Filter, Group, Restricted picklist, Sort, Update
	Description The status of the orchestration run. Valid values are: • Canceled—The orchestration instance was canceled. • Completed—The orchestration instance completed. • Error—The orchestration instance, or a stage or step within the orchestration instance, encountered an error. • InProgress—The orchestration instance is in progress. • Suspended—The orchestration instance was suspended.
TriggeringRecord	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The ID of the record that triggered the record-triggered orchestration. This field is available in API version 62.0 and later.
TriggeringRecordType	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The name of the Salesforce object configured to trigger the orchestration. This field is available in API version 64.0 and later.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

FlowOrchestrationInstanceFeed on page 55

Feed tracking is available for the object.

FlowOrchestrationInstanceHistory on page 63

History is available for tracked fields of the object.

FlowOrchestrationInstanceOwnerSharingRule on page 65

Sharing rules are available for the object. This object is available in API version 56.0 and later.

FlowOrchestrationInstanceShare on page 67

Sharing is available for the object. This object is available in API version 56.0 and later.

FlowOrchestrationLog

Represents logging data for a FlowOrchestrationInstance. This object is available in API version 54.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()` `update()`

Special Access Rules

If sharing rules are defined for FlowOrchestrationInstance and the Inherit orchestration run sharing rules to control orchestration run log record access setting is enabled, then orchestration run log record access is inherited from related orchestration run records. If the Inherit orchestration run sharing rules to control orchestration run log record access setting isn't enabled, a user must have the Manage Flow permission. Or the user must have the View All Data permission.

Fields

Field	Details
Actor	Type string Properties Filter, Group, idLookup, Nillable, Sort Description For an interactive step, the user that completed the work item. For a background or MuleSoft step, the username of the user that the step ran as.
Assignee	Type string Properties Filter, Group, Nillable, Sort Description For an interactive step, the user, group, or queue assigned to a work item when the FlowOrchestrationLog relates to an interactive FlowOrchestrationStep.

Field	Details
AssigneeType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description For an interactive step, the assignee type associated with an interactive step's work item. Valid values are: • Group • Invalid • Queue • User
Comments	Type string Properties Filter, Nillable, Sort Description The string stored in an output variable with the API name of Comments from a flow called by a completed orchestration step.
Context	Type string Properties Filter, Group, Nillable, Sort Description The ID of the record where the assigned user completed the flow associated with an interactive step in the Work Guide component.
Duration	Type long Properties Filter, Group, Nillable, Sort Description A long number that indicates the duration, in seconds, of the associated FlowOrchestrationInstance, FlowOrchestrationStage, FlowOrchestrationStep, or FlowOrchestrationWorkItem.
Kind	Type picklist Properties Filter, Group, Restricted picklist, Sort

Field	Details
	Description The milestone associated with the FlowOrchestrationLog. Valid values are: • <code>CancelInstance</code>—The associated FlowOrchestrationInstance was canceled. • <code>DiscontinueStage</code>—The associated FlowOrchestrationStage was discontinued. • <code>DiscontinueStep</code>—The associated FlowOrchestrationStep was discontinued. • <code>EndInstance</code>—The associated FlowOrchestrationInstance was completed successfully. • <code>EndStage</code>—The associated FlowOrchestrationStage was exited successfully. • <code>EndStep</code>—The associated FlowOrchestrationStep was exited successfully. • <code>EndWorkItem</code>—The associated FlowOrchestrationWorkItem was completed successfully. • <code>FailInstance</code>—The associated FlowOrchestrationInstance encountered an error. • <code>FailStage</code>—The associated FlowOrchestrationStage encountered an error. • <code>FailStep</code>—The associated FlowOrchestrationStep encountered an error. • <code>ResumeInstance</code>—A failed or paused orchestration instance was resumed. • <code>ReassignWorkItem</code>—The associated FlowOrchestrationWorkItem was reassigned. • <code>RunRecallPath</code>—The associated approval submission was recalled. • <code>StartInstance</code>—The associated FlowOrchestrationInstance started. • <code>StartStage</code>—The associated FlowOrchestrationStage started. • <code>StartStep</code>—The associated FlowOrchestrationStep started. • <code>StartWorkItem</code>—The associated FlowOrchestrationWorkItem started. • <code>SuspendInstance</code>—The associated FlowOrchestrationInstance was suspended. • <code>SuspendStage</code>—The associated FlowOrchestrationStage was suspended.
Name	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description The name for the FlowOrchestrationLog record.
OrchestrationInstanceId	Type reference Properties Filter, Sort, Group Description The FlowOrchestrationInstance associated with the FlowOrchestrationLog. This field is a relationship field. Relationship Name OrchestrationInstance

Field	Details
	Relationship Type Lookup Refers To FlowOrchestrationInstance
OrchestrationName	Type string Properties Filter, Group, idLookup , Sort Description The API name of the orchestration.
OrchestrationVersion	Type int Properties Filter, Group, Sort Description An integer for the FlowDefinitionVersion of the orchestration associated with the FlowOrchestrationLog.
StageName	Type string Properties Filter, Group, Nillable, Sort Description The API name of the stage in the associated orchestration.
StepName	Type string Properties Filter, Group, Nillable, Sort Description The API name of the step in the associated orchestration.
Timestamp	Type dateTime Properties Filter, Sort Description The date and time when the FlowOrchestrationLog milestone occurred.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

FlowOrchestrationLogFeed on page 55

Feed tracking is available for the object.

FlowOrchestrationLogHistory on page 63

History is available for tracked fields of the object.

FlowOrchestrationLogOwnerSharingRule on page 65

Sharing rules are available for the object.

FlowOrchestrationLogShare on page 67

Sharing is available for the object.

FlowOrchestrationStageInstance

Represents a run-time instance of a stage in a run-time instance of an orchestration. This read-only object is available in API version 53.0 and later.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

If sharing rules are defined for FlowOrchestrationStageInstance, they determine access to specific orchestration stage run records. Or the user must have the View All Data permission.

Fields

Field	Details
Label	Typestring PropertiesCreate, Filter, Group, Sort, Update DescriptionThe label for the flow orchestration stage instance. This label helps users and administrators differentiate between step instances from the same orchestration.
Name	Typestring PropertiesCreate, Filter, Group, idLookup, Sort, Update

Field	Details
	Description The API name for the flow orchestration stage instance.
OrchestrationInstanceId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the FlowOrchestrationInstance associated with the orchestration stage instance. This field is a relationship field. Relationship Name OrchestrationInstance Relationship Type Lookup Refers To FlowOrchestrationInstance
OrchestrationName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The API name of flow orchestration stage instance. This field is available in API version 66.0 and later.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the automated process user. This field is available in API version 56.0 and later. Relationship Name Owner Relationship Type Lookup Refers To Group, User
Position	Type int

Field	Details
	Properties Create, Filter, Group, Sort, Update Description For internal use only.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The run status of the orchestration stage instance. Valid values are: • Completed—The stage instance completed. • Discontinued—The stage was in progress or completed when the orchestration instance encountered an error. • Error—The stage instance encountered an error, an instance of a background step within the stage encountered an error, or an autolaunched flow called by a background step within the stage encountered an error. • InProgress—The stage instance is in progress. • Suspended—The stage was in progress when the orchestration instance was manually suspended.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[FlowOrchestrationStageInstanceFeed](#) on page 55

Feed tracking is available for the object.

[FlowOrchestrationStageInstanceHistory](#) on page 63

History is available for tracked fields of the object.

[FlowOrchestrationStageInstanceOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[FlowOrchestrationStageInstanceShare](#) on page 67

Sharing is available for the object.

FlowOrchestrationStepInstance

Represents a run-time instance of a step in a run-time instance of a stage of a run-time instance of an orchestration. This read-only object is available in API version 53.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

If sharing rules are defined for `FlowOrchestrationStepInstance`, they determine access to specific orchestration step run records. Or the user must have the View All Data permission.

Fields

Field	Details
Description	Type string Properties Filter, Group, Nillable, Sort Description The description of the step.
Label	Type string Properties Filter, Group, Sort Description The label of the step.
Name	Type string Properties Filter, Group, idLookup, Sort Description The API name of the step.
OrchestrationInstanceId	Type reference Properties Filter, Group, Sort Description The ID of the <code>FlowOrchestrationInstance</code> associated with the orchestration step instance. This field is a relationship field. Relationship Name OrchestrationInstance

Field	Details
	Relationship Type Lookup Refers To FlowOrchestrationInstance
OwnerId	Type reference Properties Filter, Group, Sort, Update Description The ID of the automated process user. This field is available in API version 56.0 and later. Relationship Name Owner Relationship Type Lookup Refers To User
StageInstanceId	Type reference Properties Filter, Group, Sort Description The ID of the FlowOrchestrationStageInstance associated with the orchestration step instance. This field is a relationship field. Relationship Name StageInstance Relationship Type Lookup Refers To FlowOrchestrationStageInstance
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The status of the orchestration step instance. Valid values are: Completed—The step instance completed.

Field	Details
	• Discontinued—The step instance was in progress or completed when it's associated stage instance completed, or the step was in progress or completed when the orchestration instance encountered an error. • Error—The step instance encountered an error or the autolaunched flow associated with a step instance encountered an error. • InProgress—The step instance is running, the step instance was in progress when its associated stage encountered an error, or the screen flow associated with the step instance encountered an error. • NotStarted—The step instance was created, but hasn't met its entry condition.
StepType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of step. Valid values are: • InteractiveStep—Interactive Step • BackgroundStep—Background Step • AsynchronousBackgroundStep—Asynchronous Background Step This value is available in API version 54.0 and later.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[FlowOrchestrationStepInstanceFeed](#) on page 55

Feed tracking is available for the object.

[FlowOrchestrationStepInstanceHistory](#) on page 63

History is available for tracked fields of the object.

[FlowOrchestrationStepInstanceOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[FlowOrchestrationStepInstanceShare](#) on page 67

Sharing is available for the object.

FlowOrchestrationVersion

Represents the version of an orchestration. This object is available in API version 62.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
ActivatedById	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user that activated the orchestration. This field is a relationship field. Relationship Name ActivatedBy Refers To User
ActivatedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the orchestration was activated.
ApiVersion	Type double Properties Filter, Nillable, Sort Description The API version of this orchestration record version.
Description	Type textarea Properties Nillable Description The description of the flow orchestration version.
FlowOrchestrationId	Type reference

Field	Details
	Properties Filter, Group, Sort Description The ID of the parent orchestration running this version. This field is a relationship field. Relationship Name FlowOrchestration Relationship Type Master-detail Refers To FlowOrchestration
IsOverridable	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the orchestration that's part of a managed package is overridable. The default value is <code>false</code>.
IsTemplate	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the orchestration record version is a template. The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record.

Field	Details
Name	Type string Properties Filter, Group, idLookup, Sort Description The label of the orchestration.
OrchestrationType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The orchestration's flow type. FlowType consolidates ProcessType and TriggerType into one field. FlowType is used with permissions, so admins can control access to each flow type. Valid values are: • OrchAutoInch—Autolaunched No Trigger Orchestration: Launches when invoked by Apex, REST API, custom buttons, or custom links. An orchestration lets you create a multi-step, multi-user process. • OrchRecTrigAftSave—Record-Triggered After Save Orchestration: Launches when a record is created or updated. An orchestration lets you create a multi-step, multi-user process. This type of flow runs in the background without user interaction. • CmsOrchAutoInch—CMS Workflow Orchestration Autolaunched: Launches when invoked from the Workflows component in a CMS workspace. This type of orchestration lets you create a multi-step, multi-user process to create, edit, organize, and manage digital content from a centralized location
OverriddenById	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the orchestration that's overriding the current orchestration. This field is a relationship field. Relationship Name OverriddenBy Refers To FlowOrchestration
OverriddenOrchestrationId	Type reference

Field	Details
	Properties Filter, Group, Nillable, Sort Description The ID of the orchestration that the current orchestration is overriding. This field is a relationship field. Relationship Name OverriddenOrchestration Refers To FlowOrchestration
RunInMode	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The mode that the orchestration runs in. Possible values are: • DefaultMode—The orchestration version runs in system or user context, depending on how the orchestration is launched. • SystemModeWithSharing—The orchestration version always runs in system mode with sharing. The orchestration respects org-wide default settings, role hierarchies, sharing rules, manual sharing, teams, and territories. But it doesn't respect object permissions, field-level access, or other permissions of the running user. • SystemModeWithoutSharing—The orchestration version can access all data. In the UI, this value appears as System Context without Sharing—Access All Data.
SourceTemplateId	Type reference Properties Filter, Group, Nillable, Sort Description This field is a relationship field. Relationship Name SourceTemplate Refers To FlowOrchestration
Status	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description The ID of the template that the orchestration was created from. This is a relationship field.(Refers to Orchestration Record). Possible values are: • <code>Active</code>—Active • <code>Draft</code>—Inactive • <code>InvalidDraft</code>—Draft • <code>Obsolete</code>—Inactive • <code>UnderReview</code>—Under Review
TriggerObjectOrEventLabel	Type string Properties Filter, Group, Nillable, Sort Description The label of the object or platform event that triggers this flow.
VersionNumber	Type int Properties Filter, Group, Nillable, Sort Description The version number of the orchestration version.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[FlowOrchestrationVersionChangeEvent](#) on page 68

Change events are available for the object.

FlowOrchestrationWorkItem

Represents a work item associated with a run-time instance of an interactive step in a run-time instance of an orchestration. This object is available in API version 54.0 and later.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

An assignee can see all work item records assigned to them. If sharing rules are defined for FlowOrchestrationWorkItem, they determine access to specific orchestration work item records for users other than the assignee. Or the user must have the View All Data permission.

Fields

Field	Details
AssigneeId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the user, group, or queue assigned to the orchestration work item. This field is a polymorphic relationship field. Relationship Name Assignee Relationship Type Lookup Refers To Group (Type = Regular), Group (Type = Queue), User
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the orchestration work item.
ElapsedTimeSinceAsgntInSec	Type long Properties Filter, Group, Nillable, Sort Description When status is Assigned, the number of seconds that have passed since the work item was last assigned. When status is Completed, this value is null. This field is available in API version 63.0 and later.
ElapsedTimeSinceCreationInSec	Type long Properties Filter, Group, Nillable, Sort

Field	Details
	Description When status is Assigned, the number of seconds that have passed since the work item was created. When status is Completed, this value is null. This field is available in API version 63.0 and later.
FlowType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The flow type of the orchestration that created the orchestration work item. Valid values are: - ApprovalOrchAutoInch—Autolaunched Flow Approval Process - ApprovalOrchRecTrigAftSave—Record-Triggered After Save Flow Approval Process - ExtSysChgFlowAppv1—External System Change-Triggered Flow Approval Process - ExtSysChgOrch—External System Change-Triggered Orchestration - OrchAutoInch—Autolaunched No Trigger Orchestration - OrchRecTrigAftSave—Record-Triggered After Save Orchestration This field is available in API version 62.0 and later.
Label	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The label of the orchestration work item.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The most recent time a user viewed a record related to the orchestration work item. This field is available in API version 55.0 and later.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The most recent time a user viewed the orchestration work item. This field is available in API version 55.0 and later.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The API name of the orchestration work item.
OrchestrationName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The API name of the orchestration associated with the orchestration work item. This field is available in API version 56.0 and later.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description - When the assignee is an internal user: the ID of the internal user - When the assignee is a credentialed Experience Cloud site visitor: the ID of the credentialed Experience Cloud site visitor - When the assignee is a group or queue: the ID of the automated process user This field is available in API version 56.0 and later. Relationship Name Owner Relationship Type Lookup Refers To Group (Type = Regular), Group (Type = Queue), User
RelatedRecordId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The ID of the context record, such as an account, case, or expense, that the orchestration work item is related to. An assigned user completes the associated orchestration work item on the page for this record. This field is a polymorphic relationship field. Relationship Name RelatedRecord Relationship Type Lookup Refers To All objects except AccountContactRelation, AccountTeamMember, ActiveScratchOrg, ActivityMetric, ActivityMetricRollup, CampaignMember, CartCheckoutSession, CartDeliveryGroup, CartDeliveryGroupMethod, ChatterActivity, CollaborationGroupMember, ContentDesignKit, ContentDesignKitVersion, ConversationBroadcastEntry, ConversationReason, ConversationReasonExcerpt, ConversationReasonGroup, CustomPersonDataTemplate, ElectronicMediaGroup, EngagementScore, Event, FeedItem, FlowOrchestrationWorkItem, FtestDelPlatform1, FtestDelPlatform2, FtestFormulaFieldRefSql, HighScaleSample, HighScaleSampleItem, LegalEntity, LocationWaitlist, LocationWaitlistedParty, LocWaitlistMsgTemplate, ManagedContentVersion, MessagingEndUser, MessagingSession, MLModel, MLModelFactor, MLModelFactorComponent, NetworkMember, NetworkMemberChunk, OpportunityContactRole, OpportunityLineItem, OpportunityScore, OpportunityTeamMember, OrgSnapshot, PaymentTermItem, RequestsForAccessSIQ, ScoreIntelligence, ScratchOrgInfo, SharingRecordCollection, SharingRecordCollectionItem, SharingRecordCollectionMember, StreamActivityAccess, Survey, SurveyMessagingChannel, SurveyPage, SurveyQuestionChoice, SurveyVersion, Task, TenantSecurityAlertRuleSelectedTenant, TenantSecurityApiAnomaly, TenantSecurityConnectedApp, TenantSecurityCredentialStuffing, TenantSecurityHealthCheckBaselineTrend, TenantSecurityHealthCheckDetail, TenantSecurityHealthCheckTrend, TenantSecurityLogin, TenantSecurityMetricDetail, TenantSecurityMetricDetailLink, TenantSecurityMobilePolicyTrend, TenantSecurityMonitorMetric, TenantSecurityNotification, TenantSecurityNotificationRule, TenantSecurityPackage, TenantSecurityPolicy, TenantSecurityPolicyChangeLog, TenantSecurityPolicyDeployment, TenantSecurityPolicySelectedTenant, TenantSecurityReportAnomaly, TenantSecuritySessionHijacking, TenantSecurityTenantChangeLog, TenantSecurityTenantInfo, TenantSecurityTrustedIpRangeTrend, TenantSecurityUserActivity, TenantSecurityUserPerm, TenantSecurityWebsite, TopicAssignment, UserExternalCredential, VoiceCall
ScreenFlow	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The screen flow associated with the orchestration work item.

Field	Details
	Possible values are screen flows in the org.
ScreenFlowInputs	Type textarea Properties Create, Nillable, Update Description The input parameters required by the screen flow.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The status of the work item. Valid values are: - Assigned - Completed
StepInstanceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the flow orchestration step associated with the orchestration work item. This field is a relationship field. Relationship Name StepInstance Relationship Type Lookup Refers To FlowOrchestrationStepInstance

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[FlowOrchestrationWorkItemFeed](#) on page 55

Feed tracking is available for the object.

FlowOrchestrationWorkItemHistory on page 63

History is available for tracked fields of the object.

FlowOrchestrationWorkItemOwnerSharingRule on page 65

Sharing rules are available for the object.

FlowOrchestrationWorkItemShare on page 67

Sharing is available for the object.

FlowRecord

Represents the details of a flow. This object is available in API version 58.0 and later.

Supported Calls

`delete()`, `query()`, `update()`

Fields

Field Name	Details
ActivationId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the marketing segment activation. This field is available in API version 64.0 and later. This field is a relationship field. Relationship Name Activation Relationship Type Lookup Refers To MarketSegmentActivation
ActiveVersionId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the active flow version. This field is available in API version 61.0 and later. This field is a relationship field.

Field Name	Details
	Relationship Name ActiveVersion Relationship Type Lookup Refers To FlowRecordVersion
ApiVersion	Type double Properties Filter, Group, Nillable, Sort Description The API version of the flow record. This field is available in API version 61.0 and later.
AreMetricsLoggedToDataCloud	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this flow's metrics are logged in Data Cloud. The default value is false. This field is available in API version 63.0 and later.
AssociatedRecordId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The ID of the record the flow is associated with. This field is a polymorphic relationship field. Relationship Name AssociatedRecord Relationship Type Lookup Refers To Campaign
Builder	Type string Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description The name of the tool that created this flow. Valid values are: • Cloud Flow Designer • Flow Builder • Swing Designer This field is available in API version 61.0 and later.
CapacityCategory	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The category that determines the usage limits of the flow. Possible values are: • Marketing Cloud Flow This field is available in API version 62.0 and later.
Description	Type textarea Properties Filter, Group, Nillable, Sort Description The description of the flow.
ErrorCode	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The error code if the flow element run encountered an error. Valid values are: • ACTIVATING_USER_ACCOUNT_DEACTIVATED—We can't run this flow because the user who activated it has a deactivated user record. • ACTIVATING_USER_LOST_PERMISSIONS—We can't run this flow because the user that activated it no longer has permission to it. • CANNOT_PUBLISH_SEGMENT—We can't run this flow because we can't publish the segment it's using. Contact Salesforce Customer Support and ask for help with the error ID. • CANNOT_QUERY_SEGMENT_MEMBER_DATA—We can't run this flow because we can't query the segment membership data it's using. Contact Salesforce Customer Support and ask for help with the error ID.

Field Name	Details
	CANNOT_RUN_ACTIVATION_TRIGGERED_FLOW—Something went wrong with your automation. Contact Salesforce Customer Support and ask for help with the error ID. CANNOT_REFRESH_DATA_STREAM—We can't run this flow because we can't refresh your data stream metadata. Contact Salesforce Customer Support and ask for help with the error ID. CANNOT_REFRESH_IDENTITY_RES_DATA—We can't run this flow because we can't refresh your identity resolution data. Contact Salesforce Customer Support and ask for help with the error ID. CANNOT_REFRESH_IDENTITY_RES_METADATA—We can't run this flow because we can't refresh your identity resolution metadata. Contact Salesforce Customer Support and ask for help with the error ID. CANNOT_UPDATE_DATASTREAM_METADATA—We can't run this flow because we can't update your DataStream metadata. Contact Salesforce Customer Support and ask for help with the error ID. CREATE_EXPERIMENT_ERROR—We can't run this flow because an error occurred while executing the Path Experiment element. To try again, save and activate a new version of the flow. DATA_ACTION_STATUS_ERROR—We can't run this flow because we couldn't create the data action. To try again, save and activate a new version of the flow. FLOW_FAILED_TO_START—This flow failed to start. Contact Salesforce Customer Support and ask for help with the error ID. This field is available in API version 59.0 and later.
ErrorDetails	Type string Properties Filter, Group, Nillable, Sort Description The error ID. This field is available in API version 59.0 and later.
FlowCategory	Type string Properties Filter, Group, Nillable, Sort, Update Description The API name of a category. Sharing rules assign permissions to view and edit flows by category and subcategory. This field is available in API version 60.0 and later.
FlowDefinition	Type string

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description Represents the flow definition.
FlowSubcategory	Type string Properties Filter, Group, Nillable, Sort, Update Description The API name of a subcategory. Sharing rules assign permissions to view and edit flows by category and subcategory. This field is available in API version 60.0 and later.
FlowType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The label of a flow type. FlowType consolidates ProcessType and TriggerType into one field. FlowType is used with permissions, so admins can control access to each flow type. Valid values are: • Action Cadence Step Screen Flow—Launches from a cadence step. This type of flow collects or displays information and requires user interaction. • Action Plan Autolaunched Flow—Launches an action plan task from an action plan when conditions in the associated action plan template process are met. This type of flow runs in the background without user interaction. • Activity-Object Matching No Trigger Flow—Launches when Einstein Activity Capture detects and captures a new activity, such as an email. This type of flow runs in the background without user interaction. Requires Sync Email as Salesforce Activity to be enabled. • Activation-Triggered Autolaunched Flow—Launches when an activation is published. This type of flow runs in the background without user interaction. • Admin Automation Event-Triggered Flow—Launches when invoked by Apex, processes, REST API, and more. This type of flow runs in the background without user interaction. • Autolaunched Approval Orchestration—Launches when invoked by Apex, REST API, custom buttons, or custom links. An approval orchestration lets you create a multi-step, multi-user approval process.

Field Name	Details
	• Autolaunched No Trigger Flow—Launches when invoked by processes or code such as Apex and REST API. This type of flow runs in the background without user interaction. • Autolaunched No Trigger Orchestration—Launches when invoked by Apex, REST API, custom buttons, or custom links. An orchestration lets you create a multi-step, multi-user process. • Automation Event-Triggered Autolaunched Flow—Launches when invoked by Apex, processes, REST API, and more. This type of flow runs in the background without user interaction. • Automation Event-Triggered Flow—Launches when a user performs an automation event, like subscribing to SMS messages. This type of flow runs in the background without user interaction. • Automation Event-Triggered Flow v0—Deprecated. Launches when a user performs an automation event, like subscribing to SMS messages. This type of flow runs in the background without user interaction. • Cart Async Autolaunched Flow—Launches when invoked by a cart change, such as an Add to Cart. This type of flow runs in the background without user interaction. • Checkout Screen Flow—Create a screen flow that implements a Commerce Cloud checkout process. This type of flow collects or displays information and requires user interaction. • CMS Workflow Orchestration Autolaunched—Launches when invoked from the Workflows component in a CMS workspace. This type of orchestration lets you create a multi-step, multi-user process to create, edit, organize, and manage digital content from a centralized location. • Contact Request Screen Flow—Launches when invoked by a customer, allowing them to enter contact details into a self-service form. This type of flow collects or displays information and requires user interaction. • Customer Lifecycle Record-Triggered After Save Flow—Launches after a customer lifecycle map is saved and changes records related to the triggering record. This type of flow runs in the background without user interaction. • Data Cloud Data Change Flow—Launches when a record from a Data Cloud data model object or a calculated insight object is changed and meets the specified conditions. This type of flow runs in the background without user interaction. • Data Graph-Triggered Autolaunched Flow—Launches when invoked by Apex, processes, REST API, and more. This type of flow runs in the background without user interaction. • Data Graph-Triggered Flow—Launches when invoked by Apex, processes, REST API, and more. This type of flow runs in the background without user interaction.

Field Name	Details
	• Data Graph-Triggered Flow v0—Deprecated. Launches when invoked by Apex, processes, REST API, and more. This type of flow runs in the background without user interaction. • Digital Form Screen Flow—Launches from app extensions. This type of flow collects or displays information and requires user interaction. • Discovery Framework Data Capture Screen Flow (Beta)—Launches when invoked by a user on a mobile device and presents assessment questions from Discovery Framework. This type of flow collects or displays information and requires user interaction. • Employee Service Catalog Item Screen Flow—Launches when invoked by a user and allows them to browse and order items from the Employee Service Catalog. This type of flow collects or displays information and requires user interaction. • Evaluation Autolaunched Flow—Launches when invoked by an orchestration to evaluate custom criteria for a stage or step. To indicate that the criteria are met, set the output variable <code>isOrchestrationConditionMet</code> to <code>true</code>. This type of flow runs in the background without user interaction. • External System Change-Triggered Flow—Launches when an event is received from an external system. This type of flow runs in the background without user interaction. • Event-Driven Flow—Launches when an event is received. This type of flow runs in the background without user interaction. • Field Service Mobile Screen Flow—Launches when invoked by a user in the Field Service mobile app. This type of flow collects or displays information and requires user interaction. • Field Service Web Screen Flow—Launches from the Field Service app and lets users schedule, modify, or cancel an appointment in a web browser. This type of flow requires user interaction. • Form-Triggered Autolaunched Flow—Launches when a web visitor submits a marketing form. This type of flow runs in the background without user interaction. • Form-Triggered Flow—Launches when a web visitor submits a marketing form. This type of flow runs in the background without user interaction. • Form-Triggered Flow v0—Deprecated. Launches when a web visitor submits a marketing form. This type of flow runs in the background without user interaction. • Identity User Registration Flow—Launches when a user logs in via a single sign-on process that uses the authentication provider framework. After the third-party identity provider authenticates the user, the flow creates a user or updates an existing user. This type of flow runs in the background without user interaction.

Field Name	Details
	• Indicator Result Screen Flow—Launches a screen flow when initiated by a user to calculate and create indicator results for a selected indicator performance period. • Individual-Object Linking Screen Flow—Launches when invoked by an agent to link a record like a case or messaging session to a contact, lead, person account, or employee. This type of flow collects or displays information and requires user interaction. • Login Screen Flow—Launches when a user tries to log in to Salesforce. This type of flow extends Salesforce's default authentication process by sending users with certain profiles through a flow when they log in and requires user interaction. • Loyalty Management Autolaunched Flow—Launches when invoked by a loyalty program process, and contains Assignment, Decision, and Action elements. The Action element in this type of flow supports Apex and quick actions. This type of flow runs in the background without user interaction. • Managed Content Autolaunched Flow—Launches when invoked by the ManagedContentRelease translator. This type of flow runs in the background without user interaction. • Mortgage Lending Screen Flow—Launches when invoked by a user and allows them to provide Financial Service Cloud mortgage application details. This type of flow requires user interaction. • Platform Event Triggered Flow—Launches when a platform event occurs. This type of flow runs in the background without user interaction. • Process Builder Autolaunched Process—Launched when invoked from a Process Builder process. This type of flow runs in the background without user interaction. • Process Builder Custom Event Process—A process created in Process Builder that launches when a custom event message is received. This type of process runs in the background without user interaction. • Process Builder Workflow—Launches when a record is created or updated. This type of process runs in the background without user interaction. • Prompt Template Capability-Triggered Flow—Launches from a prompt template. This type of flow adds prompt instructions to the associated prompt template and runs in the background without user interaction. • Recommendation Strategy Autolaunched Flow—Build a personalized list of recommendations. When a recommendation is selected, it launches its assigned flow. Used by Einstein Next Best Action. Show recommendations in Lightning App Builder with the Einstein Next Best Action component and in Experience Builder with the Suggested Actions component.

Field Name	Details
	• Record-Triggered After Save Flow—Launches after a record is created or updated and has been saved. This type of flow can make changes only to records related to the triggering record and runs in the background without user interaction. • Record-Triggered After Save Approval Orchestration—Launches when a record is created or updated. An approval orchestration lets you create a multi-step, multi-user approval process. • Record-Triggered After Save Orchestration—Launches when a record is created or updated. An orchestration lets you create a multi-step, multi-user process. This type of flow runs in the background without user interaction. • Record-Triggered Before Delete Flow—Launches when a record is deleted. This type of flow runs in the background without user interaction. • Record-Triggered Before Save Flow—Launches after a record is created or updated, but hasn't been saved. This type of flow can make changes only to the triggering record and runs in the background without user interaction. • Routing Autolaunched Flow—Launches when a customer initiates a chat, voice, or messaging conversation and routes the work item to a queue, skill, agent, or bot. This type of flow runs in the background without user interaction. • Schedule-Triggered Flow—Launches at a specified time and frequency for each record that meets the flow criteria. This type of flow runs in the background without user interaction. • Scheduler Appointments Screen Flow—Launches when invoked by a user and lets them schedule appointments in Salesforce Scheduler. This type of flow collects or displays information and requires user interaction. • Screen Flow—Launches from Lightning pages, Experience Cloud sites, quick actions and more. This type of flow collects or displays information and requires user interaction. • Segment-Triggered Autolaunched Flow—Launches when activated or when scheduled for qualified Data Cloud segment members. This type of flow runs in the background without user interaction. • Segment-Triggered Flow—Launches when activated or when scheduled for qualified Data Cloud segment members. This type of flow runs in the background without user interaction. • Segment-Triggered Flow v0—Deprecated. Launches when activated or when scheduled for qualified Data Cloud segment members. This type of flow runs in the background without user interaction. • Stage Management Evaluation Autolaunched Flow—Launches when invoked by a stage transition in Stage Management

Field Name	Details
	to evaluate custom criteria for a stage or step. To indicate that the criteria are met, set the output variable <code>isCriteriaMet</code> to <code>True</code>. • Survey Enrich Autolaunched Flow—Launches in the context of a survey response and can't execute without a corresponding survey. Use it to conditionally map a response to a record, create records, or send notifications. This type of flow runs in the background without user interaction. • Survey Screen Flow—Launches when invoked by an internal or external survey participant. This type of flow saves participant feedback as survey response records and requires user interaction. • Transaction Security Autolaunched Flow—Used by Condition Builder to declaratively build customized security policies to protect data. This type of flow runs in the background without user interaction. • User Provisioning Screen Flow—Launches when invoked by a user and allows them to create a user account and link it to a third-party service or app. This type of flow requires user interaction. This field is available in API version 60.0 and later.
<code>Id</code>	Type text Properties Filter, Group, Sort Description The ID of the flow.
<code>IsLightningAppEnabled</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this flow's flow type has been enabled in Lightning Experience apps. The default value is <code>false</code>. This field is available in API version 61.0 and later.
<code>IsOverridable</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the flow record version is overridable. The default value is <code>false</code>. This field is available in API version 61.0 and later.

Field Name	Details
IsPaused	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the segment-triggered flow is paused (<code>true</code>) or not (<code>false</code>). When the value is <code>true</code>, no additional records are processed until the flow is resumed. The default value is <code>false</code>. This field is available in API version 60.0 and later.
IsTemplate	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the flow record version is a template. Template flow record versions are automatically shared with all users in your Salesforce org. The default value is <code>false</code>. This field is available in API version 61.0 and later.
LogsEnabledFlowVersion	Type int Properties Filter, Group, Nillable, Sort Description The version number of the flow that enabled persistent logging. This field is available in API version 66.0 and later.
Manageable State	Type boolean Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the manageable state of the flow record that is contained in a package. Valid values are: • beta • deleted • deprecated • deprecatedEditable • installed • installedEditable • released

Field Name	Details
	unmanaged This field is available in API version 60.0 and later.
Name	Type string Properties Filter, Group, idLookup, Sort Description The label of the flow.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix associated with the flow record. This field is available in API version 61.0 and later.
OverriddenById	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the flow that's overriding the current flow. This field is available in API version 61.0 and later. This field is a relationship field. Relationship Name OverriddenBy Relationship Type Lookup Refers To FlowRecord
OverriddenFlowId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the flow that the current flow is overriding. This field is available in API version 61.0 and later. This field is a relationship field.

Field Name	Details
	Relationship Name OverriddenFlow Relationship Type Lookup Refers To FlowRecord
OwnerId	Type reference Properties Filter, Group, Sort, Update Description The ID of the user who owns the flow. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ProgressStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The progress status of the flow. Valid values are: • Canceled— Indicates a flow that has been deactivated by a user who doesn't process previously added records. No additional records are added to this flow. • Completed— Indicates a flow that is complete. No additional records are eligible to be processed in this flow. • Draft— Indicates a flow that is under construction and isn't active yet. This status can be invalid because it needs additional information before it can be activated by the user. • Error— Indicates a flow that has been deactivated because it encountered an error. When the error occurs, the error details are emailed to up to 5 users with the Manage Flows permission who most recently logged into Salesforce. • Finishing— Indicates a flow that has been deactivated by a user, but is finishing previously added records that are eligible to run to completion. No additional records are added to this flow.

Field Name	Details
	InProgress— Indicates a flow that is running or ready to run. PreparingData— Indicates a flow that is preparing the necessary data to run. This process can take up to 2 hours. Scheduled— Indicates a flow scheduled to start on the date and time selected by the user. UnderReview—Indicates a flow that is under review before it is activated. This value is available in API version 64.0 and later.
ScheduledStartDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the flow is scheduled to start.
SegmentId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the segment used in the flow. This field is a relationship field. Relationship Name Segment Relationship Type Lookup Refers To MarketSegment
SourceTemplateId	Type string Properties Filter, Group, Nillable, Sort Description The ID of the template from which the current flow was created. This field is available in API version 61.0 and later. This field is a relationship field. Relationship Name SourceTemplate Relationship Type Lookup

Field Name	Details
	Refers To FlowRecord
TriggerObjectOrEventLabel	Type string Properties Filter, Group, Nillable, Sort Description The label of the object or platform event that triggers this flow. This field is available in API version 61.0 and later.
Type	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The trigger type of the flow. Specifies what causes the flow to run. Valid values are: • Activation—The flow starts when an activation is published. This type of flow runs in the background without user interaction. This value is available in API version 64.0 and later. • AdminAutomationEvent—The flow starts when an automation event is received. This type of flow runs in the background without user interaction. This value is available in API version 64.0 and later. • Automation Event—The flow starts when an automation event such as an SMS subscription occurs. This value is available in API version 62.0 and later. • Capability—The flow starts when the specified capability that the flow integrates with is invoked. This value is available in API version 60.0 and later. • DataCloudDataChange—The flow starts when data model object (DMO) or calculated insight object (CIO) conditions are met. This value is available in API version 59.0 and later. • DataGraphDataChange—The flow starts when conditions are met in the specified data graph field. This value is available in API version 63.0 and later. • EventDrivenJourney—Reserved for internal use. • ExternalSystemChange—The flow starts when an external system change event is received. This value is available in API version 61.0 and later. • FormSubmissionEvent—The flow runs when a user submits data via a webform. In Flow Builder, this value corresponds to Form. This value is available in API version 60.0 and later.

Field Name	Details
	• <code>PlatformEvent</code>—The flow starts when a platform event message is received. This value is available in API version 49.0 and later. • <code>RecordAfterSave</code>—The flow starts after a record is saved. This value is available in API version 49.0 and later. • <code>RecordBeforeDelete</code>—Deleting a record triggers an autolaunched flow before the record is deleted from the database. This value is available in API version 50.0 and later. • <code>RecordBeforeSave</code>—Creating and/or updating a record triggers an autolaunched flow to make additional updates to that record before it's saved to the database. This value is available in API version 48.0 and later. • <code>Scheduled</code>—The flow starts at the scheduled time. This value is available in API version 47.0 and later. • <code>Segment</code>—The flow runs at the scheduled time of a segment.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[FlowRecordChangeEvent](#) (API version 62.0)

Change events are available for the object.

[FlowRecordOwnerSharingRule](#)

Sharing rules are available for the object.

[FlowRecordShare](#)

Sharing is available for the object.

FlowRecordElement

Represents a single element within a flow version. This object is available in API version 58.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field Name	Details
<code>DataSpaceId</code>	Type reference Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description The ID of the data space for this flow record element. This field is available in API version 66.0 and later. This field is a relationship field. Relationship Name DataSpace Refers To DataSpace
ElementName	Type string Properties Filter, Group, Nillable, Sort Description The API name of the flow element.
FlowRecordVersionId	Type reference Properties Filter, Group, Sort Description The ID of the flow version the flow element is part of. This field is a relationship field. Relationship Name FlowRecordVersion Relationship Type Master-detail Refers To FlowRecordVersion (the master object)
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the flow element was last used.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field Name	Details
	Description The date and time that the flow element was last viewed.
Name	Type string Properties Filter, Group, idLookup, Sort Description The label of the flow element.

FlowRecordElementChangeEvent (API version 62.0)

Change events are available for the object.

FlowRecordElementOccurrence

Represents the execution metrics for a single element within a flow version. This object is available in API version 62.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The ISO code for the currency associated with the flow. Possible values are: • USD—U.S. Dollar The default value is USD.
Entries	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The number of times the element was initiated in all flow interviews after the flow version was executed.
Errors	Type int Properties Filter, Group, Nillable, Sort Description The number of errors for the element in all flow interviews after the flow version was executed.
Exits	Type int Properties Filter, Group, Nillable, Sort Description The number of times the element was executed to completion in all flow interviews after the flow version was executed.
FlowRecordElementId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the flow element. This field is a relationship field. Relationship Name FlowRecordElement Refers To FlowRecordElement
FlowRecordId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the flow. This field is a relationship field.

Field	Details
	Relationship Name FlowRecord
	Refers To FlowRecord
FlowRecordVersionId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description The ID of the flow version. This field is a relationship field.
	Relationship Name FlowRecordVersion
	Refers To FlowRecordVersion
FlowRecordVersionOccurrenceId	Type reference
	Properties Filter, Group, Sort
	Description The ID of the flow occurrence. This field is a relationship field.
	Relationship Name FlowRecordVersionOccurrence
	Relationship Type Master-detail
	Refers To FlowRecordVersionOccurrence (the master object)
Name	Type string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description The API name of the flow element.
Stopped	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort
	Description The number of times execution of the element was stopped in all flow interviews after the flow version was executed.
TotalDuration	Type long
	Properties Filter, Group, Nillable, Sort
	Description The total time in milliseconds spent executing the element in all flow interviews.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[FlowRecordElementOccurrenceChangeEvent](#) on page 68

Change events are available for the object.

[FlowRecordElementOccurrenceFeed](#) on page 55

Feed tracking is available for the object.

[FlowRecordElementOccurrenceHistory](#) on page 63

History is available for tracked fields of the object.

[FlowRecordElementOccurrenceOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[FlowRecordElementOccurrenceShare](#) on page 67

Sharing is available for the object.

FlowRecordRelation

Represents a relationship between a record and a flow interview. When a flow interview is paused, Salesforce uses the `$Flow.CurrentRecord` global variable in the flow to associate the interview with a record. Available in API version 42.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The auto-generated ID of this relation.
ParentId	Type reference Properties Create, Filter, Group, Sort Description The flow interview that the record is related to. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To FlowInterview
RelatedRecordId	Type reference Properties Create, Filter, Group, Sort, Update Description The record that the flow interview is related to. Make sure that this field contains only one ID, and that the ID is for a valid object. Custom objects and most standard objects are supported. This is a relationship field. Relationship Name RelatedRecord Relationship Type Lookup Refers To Account, AccountContactRole, AccountPartner, Accreditation, ActivationTarget, ActivationTrgtIntOrgAccess, Address, AlternativePaymentMethod, Announcement, ApexTestQueueItem, AppAnalyticsQueryRequest, AppUsageAssignment, AssessmentIndicatorDefinition, AssessmentTask,

Field Name

Details

AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskIndDefinition, AssessmentTaskOrder, Asset, AssetRelationship, AssignedResource, AssociatedLocation, AsyncApexJob, Attachment, AuthorizationForm, AuthorizationFormConsent, AuthorizationFormDataUse, AuthorizationFormText, Award, BackgroundOperation, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, CalendarView, Campaign, CampaignMember, CardPaymentMethod, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis, CareInterventionType, CareMetricTarget, CareObservation, CareObservationComponent, CarePgmProvHealthcareProvider, CarePreauth, CarePreauthItem, CareProgram, CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee, CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider, CareProgramTeamMember, CareProviderAdverseAction, CareProviderFacilitySpecialty, CareProviderSearchableField, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareSpecialtyTaxonomy, CareTaxonomy, Case, CaseContactRole, CaseSolution, CodeSet, CodeSetBundle, CollaborationGroup, CollaborationGroupMember, CollaborationGroupMemberRequest, CollaborationGroupRecord, CollaborationInvitation, CommSubscription, CommSubscriptionChannelType, CommSubscriptionConsent, CommSubscriptionTiming, ConferenceNumber, ConsumptionRate, ConsumptionSchedule, Contact, ContactEncounter, ContactEncounterParticipant, ContactPointAddress, ContactPointConsent, ContactPointEmail, ContactPointPhone, ContactPointTypeConsent, ContactRequest, ContentDistribution, ContentDocument, ContentDocumentLink, ContentDocumentSubscription, ContentFolder, ContentFolderLink, ContentFolderMember, ContentNotification, ContentVersion, ContentVersionComment, ContentVersionRating, ContentWorkspaceDoc, Contract, ContractContactRole, ConversationEntry, CoverageBenefit, CoverageBenefitItem, CreditMemo, CreditMemoLine, Dashboard, DashboardComponent, DataAssessmentFieldMetric, DataAssessmentMetric, DataAssessmentValueMetric, DataStream, DataUseLegalBasis, DataUsePurpose, DelegatedAccount, DeleteEvent, DialerCallUsage, DigitalSignature, DigitalWallet, Document, DocumentChecklistItem, DuplicateRecordItem, DuplicateRecordSet, EmailMessage, EmailMessageRelation, EngagementChannelType, EnhancedLetterhead, EnrollmentEligibilityCriteria, EntitySubscription, Event, EventRelation, ExternalEvent, ExternalEventMapping, FeedAttachment, FeedComment, FeedItem, FeedPollChoice, FeedPollVote, FeedRevision, FileSearchActivity, FlowInterviewLog, FlowInterviewLogEntry, FlowStageRelation, HealthCareDiagnosis, HealthCareProcedure, HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, Idea, Identifier, IdentityDocument, Image, Individual, IndividualApplication, InstalledMobileApp, Invoice, InvoiceLine, Lead, ListEmail, ListEmailIndividualRecipient, ListEmailRecipientSource, Location, LocationTrustMeasure, MarketSegment, MarketSegmentActivation,

Field Name	Details
	MatchingInformation, MemberPlan, MessagingDeliveryError, MessagingEndUser, MktCalculatedInsight, MktSgmtActvtnAudAttribute, MktSgmtActvtnContactPoint, Note, OperatingHours, Opportunity, OpportunityContactRole, OpportunityLineItem, OpportunityPartner, Order, OrderItem, OrgMetric, OrgMetricScanResult, OrgMetricScanSummary, OtherComponentTask, Partner, PartyConsent, Payment, PaymentAuthAdjustment, PaymentAuthorization, PaymentGateway, PaymentGatewayLog, PaymentGroup, PaymentLineInvoice, PersonEducation, PersonLanguage, PersonLifeEvent, PersonName, PlanBenefit, PlanBenefitItem, Pricebook2, PricebookEntry, ProcessException, ProcessInstance, ProcessInstanceNode, Product2, ProductConsumptionSchedule, ProductFulfillmentLocation, ProductItem, ProductItemTransaction, ProductRequest, ProductRequestLineItem, ProductRequired, ProductTransfer, ProfileSkill, ProfileSkillEndorsement, ProfileSkillUser, PromptAction, ProviderSearchSyncLog, PurchaserPlan, PurchaserPlanAssn, PushTopic, QuickText, QuickTextUsage, ReceivedDocument, Recommendation, RecordAction, Refund, RefundLinePayment, ReplyText, Report, ResourceAbsence, ResourcePreference, ReturnOrder, ReturnOrderItemAdjustment, ReturnOrderItemTax, ReturnOrderLineItem, SearchPromotionRule, ServiceAppointment, ServiceResource, ServiceResourceSkill, ServiceTerritory, ServiceTerritoryMember, ServiceTerritoryWorkType, SetupAssistantStep, SharingRecordCollection, SharingRecordCollectionItem, SharingRecordCollectionMember, Shift, Shipment, ShipmentItem, SkillRequirement, SocialPersona, SocialPost, Solution, StreamingChannel, Task, ThreatDetectionFeedback, TimeSlot, TodayGoal, Topic, TopicAssignment, UnitOfMeasure, UserAppInfo, UserAppMenuCustomization, UserEmailPreferredPerson, UserProvAccount, UserProvAccountStaging, UserProvMockTarget, UserProvisioningLog, UserProvisioningRequest, VideoCall, VideoCallParticipant, VideoCallRecording, Visit, VisitedParty, Visitor, VoiceCall, VoiceCallRecording, VoiceVendorLine, VolunteerProject, WaveAutoInstallRequest, WaveCompatibilityCheckItem, WorkAccess, WorkBadge, WorkBadgeDefinition, WorkOrder, WorkOrderLineItem, WorkThanks, WorkType, WorkTypeGroup, WorkTypeGroupMember

FlowRecordVersion

Represents the version of a flow. This object is available in API version 58.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Fields

Field Name	Details
ActivatedById	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user that activated the flow. This field is available in API version 60.0 and later. This field is a relationship field. Relationship Name ActivatedBy Relationship Type Lookup Refers To User
ActivatedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the flow was activated. This field is available in API version 60.0 and later.
ApiVersion	Type double Properties Filter, Nillable, Sort Description The API version of the flow record version. This field is available in API version 61.0 and later.
AreMetricsLoggedToDataCloud	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this flow's metrics are logged in Data Cloud. The default value is false. This field is available in API version 63.0 and later.

Field Name	Details
Builder	Type string Properties Filter, Group, Nillable, Sort Description The name of the tool that created this flow. Valid values are: • Cloud Flow Designer • Flow Builder • Swing Designer This field is available in API version 61.0 and later.
CapacityCategory	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The category that determines the usage limits of the flow. Possible values are: • Marketing Cloud Flow This field is available in API version 62.0 and later.
DataSpaceId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the data space for this flow record version. This field is available in API version 65.0 and later. This field is a relationship field. Relationship Name DataSpace Refers To DataSpace
Description	Type textarea Properties Nillable Description The description of the flow record version. This field is available in API version 61.0 and later.

Field Name	Details
Entries	Type int Properties Filter, Group, Sort Description The number of entries in this flow. To use this field, your org must use Salesforce Enterprise and Unlimited Editions with Marketing Cloud Growth Edition. This field is available in API version 60.0 and later.
Errors	Type int Properties Filter, Group, Sort Description The number of errors in this flow. To use this field, your org must use Salesforce Enterprise and Unlimited Editions with Marketing Cloud Growth Edition. This field is available in API version 60.0 and later.
Exits	Type int Properties Filter, Group, Sort Description The number of exits from this flow. To use this field, your org must use Salesforce Enterprise and Unlimited Editions with Marketing Cloud Growth Edition. This field is available in API version 60.0 and later.
FlowRecordId	Type reference Properties Filter, Group, Sort Description The ID of the parent flow running this version. This field is a relationship field. Relationship Name FlowRecord Relationship Type Lookup Refers To FlowRecord

Field Name	Details
FlowType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The label of a flow type. FlowType consolidates ProcessType and TriggerType into one field. FlowType is used with permissions, so admins can control access to each flow type. Valid values are: • Action Cadence Step Screen Flow—Launches from a cadence step. This type of flow collects or displays information and requires user interaction. • Activation-Triggered Autolaunched Flow—Launches when an activation is published. This type of flow runs in the background without user interaction. This value is available in API version 64.0 and later. • Action Plan Autolaunched Flow—Launches an action plan task from an action plan when conditions in the associated action plan template process are met. This type of flow runs in the background without user interaction. • Admin Automation Event-Triggered Flow—Launches when invoked by Apex, processes, REST API, and more. This type of flow runs in the background without user interaction. This value is available in API version 64.0 and later. • Agentic Guided Experience Background Flow—Creates, retrieves, updates, or deletes records. This autolaunched flow runs in the background. This value is available in API version 65.0 and later. • Agentic Guided Experience Orchestration Flow—Launches when a mobile worker invokes it from the Field Service mobile app. With Agentic Guided Experience, configure the mobile experience to follow a tailored work completion process. This value is available in API version 65.0 and later. • Agentic Guided Experience Screen Data Flow—Retrieve records for use throughout AGX Screen and AGX Orchestration flows. This autolaunched flow runs in the background. This value is available in API version 65.0 and later. • Agentic Guided Experience Screen Flow—A screen flow that can launch from an interactive step on an AGX orchestration flow. This value is available in API version 65.0 and later. • Autolaunched Approval Orchestration—Launches when invoked by Apex, REST API, custom buttons, or custom links. An approval orchestration lets you create a multi-step, multi-user approval process. • Autolaunched No Trigger Flow—Launches when invoked by processes or code such as Apex and REST API. This type of flow runs in the background without user interaction.

Field Name	Details
	• Autolaunched No Trigger Orchestration—Launches when invoked by Apex, REST API, custom buttons, or custom links. An orchestration lets you create a multi-step, multi-user process. • Automation Event-Triggered Flow—Launches when invoked by Apex, processes, REST API, and more. This type of flow runs in the background without user interaction. This value is available in API version 64.0 and later. • Automation Event-Triggered Flow—Launches when an automation event is received. This type of flow runs in the background without user interaction. • Broadcast Flow—Launches when referenced by Apex, REST API, or subflow element. This value is available in API version 65.0 and later. • Cart Async Autolaunched Flow—Launches when invoked by a cart change, such as an Add to Cart. This type of flow runs in the background without user interaction. • Checkout Screen Flow—Create a screen flow that implements a Commerce Cloud checkout process. This type of flow collects or displays information and requires user interaction. • CMS Workflow Orchestration Autolaunched—Launches when invoked from the Workflows component in a CMS workspace. This type of orchestration lets you create a multi-step, multi-user process to create, edit, organize, and manage digital content from a centralized location. • Contact Request Screen Flow—Launches when invoked by a customer, allowing them to enter contact details into a self-service form. This type of flow collects or displays information and requires user interaction. • Customer Lifecycle Record-Triggered After Save Flow—Launches after a customer lifecycle map is saved and changes records related to the triggering record. This type of flow runs in the background without user interaction. • Data Cloud Data Change Flow—Launches when a record from a Data Cloud data model object or a calculated insight object is changed and meets the specified conditions. This type of flow runs in the background without user interaction. • Data Graph-Triggered Flow—Launches when conditions are met in the specified data graph field. This type of flow runs in the background without user interaction. This value is available in API version 64.0 and later. • Data Graph-Triggered Flow v0—Launches when conditions are met in the specified data graph field. This type of flow runs in the background without user interaction. • Digital Form Screen Flow—Launches from app extensions. This type of flow collects or displays information and requires user interaction. • Discovery Framework Data Capture Screen Flow (Beta) —Launches when invoked by a user on a mobile device and

Field Name	Details
	presents assessment questions from Discovery Framework. This type of flow collects or displays information and requires user interaction. • Employee Service Catalog Item Screen Flow—Launches when invoked by a user and allows them to browse and order items from the Employee Service Catalog. This type of flow collects or displays information and requires user interaction. • Evaluation Autolaunched Flow—Launches when invoked by an orchestration to evaluate custom criteria for a stage or step. To indicate that the criteria are met, set the output variable <code>isOrchestrationConditionMet</code> to <code>true</code>. This type of flow runs in the background without user interaction. • External System Change-Triggered Flow Approval Process—Launches when data changes in a supported external system. A flow approval process lets you create a multi-step, multi-user approval process. This value is available in API version 65.0 and later. • External System Change-Triggered Orchestration—Launches when data changes in a supported external system. An orchestration lets you create a multi-step, multi-user process. This value is available in API version 65.0 and later. • External System Change-Triggered Flow—Launches when an event is received from an external system. This type of flow runs in the background without user interaction. • Event-Driven Flow—Launches when an event is received. This type of flow runs in the background without user interaction. • Field Service Mobile Screen Flow—Launches when invoked by a user in the Field Service mobile app. This type of flow collects or displays information and requires user interaction. • Field Service Web Screen Flow—Launches from the Field Service app and lets users schedule, modify, or cancel an appointment in a web browser. This type of flow requires user interaction. • Form-Triggered Flow—Launches when a web visitor submits a marketing form. This type of flow runs in the background without user interaction. This value is available in API version 64.0 and later. • Form-Triggered Flow v0—Launches when a web visitor submits a marketing form. This type of flow runs in the background without user interaction. • Identity User Registration Autolaunched Flow—Launches when a user logs in via a single sign-on process that uses the authentication provider framework. After the third-party identity provider authenticates the user, the flow creates a user or updates an existing user. This type of flow runs in the background without user interaction. This value is available in API version 64.0 and later.

Field Name	Details
	• Indicator Result Screen Flow—Launches a screen flow when initiated by a user to calculate and create indicator results for a selected indicator performance period. • Individual-Object Linking Screen Flow—Launches when invoked by an agent to link a record like a case or messaging session to a contact, lead, person account, or employee. This type of flow collects or displays information and requires user interaction. • Login Screen Flow—Launches when a user tries to log in to Salesforce. This type of flow extends Salesforce's default authentication process by sending users with certain profiles through a flow when they log in and requires user interaction. • Loyalty Management Autolaunched Flow—Launches when invoked by a loyalty program process, and contains Assignment, Decision, and Action elements. The Action element in this type of flow supports Apex and quick actions. This type of flow runs in the background without user interaction. • Managed Content Autolaunched Flow—Launches when invoked by the ManagedContentRelease translator. This type of flow runs in the background without user interaction. • Mortgage Lending Screen Flow—Launches when invoked by a user and allows them to provide Financial Service Cloud mortgage application details. This type of flow requires user interaction. • On-Demand Flow—Launches when referenced by the REST API. This autolaunched flow runs asynchronously in the background. This value is available in API version 65.0 and later. • Platform Event Triggered Flow—Launches when a platform event occurs. This type of flow runs in the background without user interaction. • Process Builder Autolaunched Process—Launched when invoked from a Process Builder process. This type of flow runs in the background without user interaction. • Process Builder Custom Event Process—A process created in Process Builder that launches when a custom event message is received. This type of process runs in the background without user interaction. • Process Builder Workflow—Launches when a record is created or updated. This type of process runs in the background without user interaction. • Prompt Template Capability-Triggered Flow—Launches from a prompt template. This type of flow adds prompt instructions to the associated prompt template and runs in the background without user interaction. • Recommendation Strategy Autolaunched Flow—Build a personalized list of recommendations. When a recommendation is selected, it launches its assigned flow. Used by Einstein Next Best Action. Show

Field Name	Details
	recommendations in Lightning App Builder with the Einstein Next Best Action component and in Experience Builder with the Suggested Actions component. • Record-Triggered After Save Flow—Launches after a record is created or updated and has been saved. This type of flow can make changes only to records related to the triggering record and runs in the background without user interaction. • Record-Triggered After Save Orchestration—Launches when a record is created or updated. An orchestration lets you create a multi-step, multi-user process. This type of flow runs in the background without user interaction. • Record-Triggered After Save Orchestration—Launches when a record is created or updated. An orchestration lets you create a multi-step, multi-user process. This type of flow runs in the background without user interaction. • Record-Triggered Before Delete Flow—Launches when a record is deleted. This type of flow runs in the background without user interaction. • Record-Triggered Before Save Flow—Launches after a record is created or updated, but hasn't been saved. This type of flow can make changes only to the triggering record and runs in the background without user interaction. • Routing Autolaunched Flow—Launches when a customer initiates a chat, voice, or messaging conversation and routes the work item to a queue, skill, agent, or bot. This type of flow runs in the background without user interaction. • Schedule-Triggered Flow—Launches at a specified time and frequency for each record that meets the flow criteria. This type of flow runs in the background without user interaction. • Scheduler Appointments Screen Flow—Launches when invoked by a user and lets them schedule appointments in Salesforce Scheduler. This type of flow collects or displays information and requires user interaction. • Screen Flow—Launches from Lightning pages, Experience Cloud sites, quick actions and more. This type of flow collects or displays information and requires user interaction. • Segment-Triggered Flow—Launches when activated or when scheduled for qualified Data Cloud segment members. This type of flow runs in the background without user interaction. This value is available in API version 64.0 and later. • Segment-Triggered Flow v0—Launches when activated or when scheduled for qualified Data Cloud segment members. This type of flow runs in the background without user interaction. • Survey Enrich Autolaunched Flow—Launches in the context of a survey response and can't execute without a corresponding survey. Use

Field Name	Details
	it to conditionally map a response to a record, create records, or send notifications. This type of flow runs in the background without user interaction. • Survey Screen Flow—Launches when invoked by an internal or external survey participant. This type of flow saves participant feedback as survey response records and requires user interaction. • Transaction Security Autolaunched Flow—Used by Condition Builder to declaratively build customized security policies to protect data. This type of flow runs in the background without user interaction. • User Provisioning Screen Flow—Launches when invoked by a user and allows them to create a user account and link it to a third-party service or app. This type of flow requires user interaction. This field is available in API version 60.0 and later.
Id	Type text Properties Filter, Group, Sort Description The ID of the flow version.
IsOverridable	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the flow record version is overridable. The default value is <code>false</code>. This field is available in API version 61.0 and later.
IsPaused	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the segment-triggered flow is paused (<code>true</code>) or not (<code>false</code>). When the value is <code>true</code>, no additional records are processed until the flow is resumed. The default value is <code>false</code>. This field is available in API version 60.0 and later.
IsTemplate	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field Name	Details
	Description Indicates whether the flow record version is a template. Template flow record versions are automatically shared with all users in your Salesforce org. The default value is <code>false</code>. This field is available in API version 61.0 and later.
OverriddenById	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the flow that's overriding the current flow. This field is available in API version 61.0 and later. This field is a relationship field. Relationship Name OverriddenBy Relationship Type Lookup Refers To FlowRecord
OverriddenFlowId	Type text Properties Filter, Group, Nillable, Sort Description The ID of the flow that the current flow is overriding. This field is available in API version 61.0 and later. This field is a relationship field. Relationship Name OverriddenFlow Relationship Type Lookup Refers To FlowRecord
PausedDate	Type dateTime Properties Filter, Nillable, Sort

Field Name	Details
	Description The date and time the segment-triggered flow was paused. This field is available in API version 60.0 and later.
PausingUserId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user who paused the segment-triggered flow. This field is available in API version 60.0 and later. This field is a relationship field. Relationship Name PausingUser Relationship Type Lookup Refers To User
ProgressStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The running status of the flow. Valid values are: • Canceled— Specifies a flow that was deactivated by a user. The flow doesn't process previously added records and no additional records are added to this flow. • Completed— Indicates a flow that is complete. No additional records are eligible to be processed in this flow. • Draft— Indicates a flow that is under construction and isn't active yet. This status can be invalid because it needs additional information before a user can activate it. • Error— Indicates a flow that has been deactivated because it encountered an error. When the error occurs, the error details are emailed to up to 5 users with the Manage Flows permission who most recently logged into Salesforce. • Finishing— Indicates a flow that was deactivated by a user, but is finishing records previously added that are eligible to run to completion. No additional records are added to this flow. • InProgress— Indicates a flow that is running or ready to run. • PreparingData— Indicates a flow that is preparing the resources it requires to run. This process can take up to 2 hours.

Field Name	Details
	Scheduled— Indicates a flow scheduled to start on the date and time selected by the user.
ReasonPaused	Type textarea Properties Filter, Group, Nillable, Sort Description The reason the segment-triggered flow was paused. This field is available in API version 60.0 and later.
ResumedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time the segment-triggered flow resumed. This field is available in API version 60.0 and later.
ResumingUserId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user who resumed the segment-triggered flow. This field is available in API version 60.0 and later. This field is a relationship field. Relationship Name ResumingUser Relationship Type Lookup Refers To User
RunInMode	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The mode that the flow runs in. Valid values are: DefaultMode—The flow record version runs in system or user context, depending on how the flow is launched.

Field Name	Details
	<code>SystemModeWithSharing</code>—The flow record version always runs in system mode with sharing. The flow respects org-wide default settings, role hierarchies, sharing rules, manual sharing, teams, and territories. But it doesn't respect object permissions, field-level access, or other permissions of the running user. <code>SystemModeWithoutSharing</code>—The flow record version can access all data. In the UI, this value appears as System Context without Sharing—Access All Data. This value is available in API version 49.0 and later. This field is available in API version 61.0 and later.
<code>ScheduledStartDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The date and time the flow started. This field is available in API version 60.0 and later.
<code>SourceTemplateId</code>	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the template from which the current flow was created. This field is available in API version 61.0 and later. This field is a relationship field. Relationship Name SourceTemplate Relationship Type Lookup Refers To FlowRecord
<code>Status</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The flow's status. Valid values are: - Active - Draft - InvalidDraft

Field Name	Details
	• <code>Obsolete</code> • <code>UnderReview</code>— This value is available in API version 64.0 and later. This field is available in API version 61.0 and later.
<code>TriggerObjectOrEventLabel</code>	Type string Properties Filter, Group, Nillable, Sort Description The label of the object or platform event that triggers this flow. This field is available in API version 61.0 and later.
<code>VersionNumber</code>	Type int Properties Filter, Group, Nillable, Sort Description The version number of the flow version.

FlowRecordVersionOccurrence

Represents an instance of a recurring flow that runs on a schedule. For example, a flow that runs weekly on Wednesdays creates an occurrence each time it runs. This object is available in API version 60.0 and later.

Supported Calls

`describe()`, `read()`

Fields

Field	Details
<code>DataSpaceId</code>	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the data space for this occurrence. This field is available in API version 65.0 and later. This field is a relationship field.

Field	Details
	Relationship Name DataSpace Refers To DataSpace
Entries	Type integer Properties Filter, Group, Query, Retrieve, Sort Description The number of entries for this occurrence.
Errors	Type integer Properties Filter, Group, Query, Retrieve, Sort Description The number of errors for this occurrence.
ErrorDetail	Type string Properties Filter, Group, Nillable, Sort Description A description of the error. This field is available in API version 63.0 and later.
Exits	Type integer Properties Filter, Group, Query, Retrieve, Sort Description The number of exits for this occurrence.
FlowRecordId	Type string Properties Filter, Group, Query, Retrieve, Sort Description The ID of the associated flow record.
FlowRecordVersionId	Type string

Field	Details
	Properties Filter, Group, Query, Retrieve, Sort Description The ID of the associated version of the flow record.
ProgressStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The running status of the flow interview. Valid values are: • Canceled Specifies a flow interview that was deactivated by a user. The flow doesn't process previously added records and no additional records are added to this flow. • Completed Indicates a flow interview that is complete. No additional records are eligible to be processed in this flow. • Error Indicates a flow interview that has been deactivated because it encountered an error. When the error occurs, the error details are emailed to up to 5 users with the Manage Flows permission who most recently logged into Salesforce. • Finishing Indicates a flow interview that was deactivated by a user, but is finishing records previously added that are eligible to run to completion. No additional records are added to this flow. • InProgress Indicates a flow interview that is running or ready to run. • PreparingData Indicates a flow interview that is preparing the resources it requires to run. This process can take up to 2 hours.
ScheduledDate	Type dateTime Properties Filter, Group, Query, Retrieve, Sort Description The scheduled time and date of the occurrence.

Field	Details
Stopped	Type integer Properties Filter, Group, Query, Retrieve, Sort Description The number of flows that were stopped for this occurrence.

FlowTestResult

Represents the results for a flow test associated with a flow version. This object is available in API version 55.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

To view test run details, you must have the View All Data user permission. You can view flow tests and test results without the View All Data permission.

Fields

Field	Details
FlowDefinitionViewId	Type string Properties Filter, Nillable, Sort Description The ID of the flow definition associated with the flow test result. This is a relationship field. Relationship Name FlowDefinitionView Relationship Type Lookup Refers To FlowDefinitionView
FlowTestViewId	Type string

Field	Details
	Properties Filter, Nillable, Sort Description The ID of the flow test associated with the flow test result. This is a relationship field. Relationship Name FlowTestView Relationship Type Lookup Refers To FlowTestView
FlowVersionNumber	Type int Properties Filter, Group, Nillable, Sort Description The version number for the flow.
FlowVersionViewId	Type string Properties Filter, Nillable, Sort Description The ID of the flow version associated with the flow test result. This is a relationship field. Relationship Name FlowVersionView Relationship Type Lookup Refers To FlowVersionView
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the flow test result.

Field	Details
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the user who owns this test result. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
Result	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Specifies the flow test result. Possible values are: • Error • Fail • Pass • skip—The test run was skipped because the test doesn't exist for that flow version. This value appears only when you trigger tests by using Salesforce CLI. This value is available in API version 66.0 and later.
TestEndDateTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the flow test ended.
TestStartDateTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the flow test started.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

FlowTestResultShare

Sharing is available for the object.

FlowTestView

Represents the description of a flow test associated with a flow definition. This object is available in API version 55.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Fields

Field	Details
Description	Type textarea Properties Nillable Description The description of the flow test associated with the flow test view.
DurableId	Type string Properties Filter, Group, Nillable, Sort Description The ID of the flow test associated with this flow test view.
FlowDefinitionViewId	Type string Properties Filter, Nillable, Sort Description The ID of the flow definition associated with the flow test view. This is a relationship field. Relationship Name FlowDefinitionView

Field	Details
	Relationship Type Lookup Refers To FlowDefinitionView
FlowTestApiName	Type string Properties Filter, Group, Nillable, Sort Description The API name of the flow test associated with the flow test view.
FlowTestLabel	Type string Properties Filter, Group, Nillable, Sort Description The label of the flow test associated with the flow test view.

FlowStageRelation

Represents a relationship between a paused flow interview and its stages. When a flow interview is paused, Salesforce creates a FlowStageRelation record for each stage that's set to the `$Flow.CurrentStage` or `$Flow.ActiveStages` global variable. Available in API version 43.0 and later.

Supported Calls

`delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`

Fields

Field	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The auto-generated ID of this relation.

Field	Details
ParentId	Type reference Properties Filter, Group, Sort Description The flow interview that the record is related to. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To FlowInterview
StageLabel	Type string Properties Filter, Nillable, Sort Description Label for the stage. If the stage is translated, the label respects the language of the user who is querying the label.
StageOrder	Type int Properties Filter, Group, Sort Description The order of this stage when the flow interview was paused. This order may differ from the order in the stage definition. • If the type is Active, the order corresponds to the order of the stage in <code>\$Flow.ActiveStages</code>. • If the type is Current and corresponds to an active stage, the order matches the order of the active stage. • If the type is Current and doesn't correspond to an active stage, the order is 0.
StageType	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Type of stage. The valid values are:

Field	Details
	- Current: Identifies that the stage is set to <code>\$Flow.CurrentStage</code>. - Active: Identifies that the stage is set to <code>\$Flow.ActiveStages</code>.

Usage

You can use the FlowStageRelation records to represent the paused interview and its active and current stages visually.

For example, an Online Purchasing flow interview starts with several stages in `$Flow.ActiveStages`. If the interview is paused, Salesforce creates a FlowStageRelation record for each stage in `$Flow.ActiveStages` or `$Flow.CurrentStage`.

StageLabel	StageType	StageOrder
Review Cart	Active	0
Shipping Details	Active	1
Billing Details	Active	2
Payment Details	Active	3
Order Confirmation	Active	4
Shipping Details	Current	1

FlowVariableView

Represents a variable within the flow version. This object is available in API version 46.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Fields

Field	Details
ApiName	Type string Properties Filter, Group, Nillable, Sort Description The API name of the flow variable.
DataType	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The data type of the flow variable. Valid values are: • Apex—This value is available in API version 46.0 and later. • Boolean • Currency • Date • DateTime—This value is available in API version 30.0 and later. • Number • Multipicklist—This value is available in API version 34.0 and later. • Picklist—This value is available in API version 34.0 and later. • String • sObject
Description	Type string Properties Filter, Group, Nillable, Sort Description Flow variable information, specified by the org's admin.
DurableId	Type string Properties Filter, Group, Nillable, Sort Description The Id of the flow variable.
FlowVersionViewId	Type string Properties Filter, Nillable, Sort Description The Id of the flow version. This is a relationship field. Relationship Name FlowVersionView Relationship Type Lookup

Field	Details
	Refers To FlowVersionView
IsCollection	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether or not the flow variable is a collection of values.
IsInput	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicated whether or not the flow variable is available for input.
IsOutput	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether or not the flow variable is available for output.
ObjectType	Type string Properties Filter, Group, Nillable, Sort Description If the data type is sObject, this field indicates which object.

Usage

Use this object to query information about flow variables. A query must be filtered by `FlowVersionViewId` to get results. Only variables with `IsInput` or `IsOutput` marked as true are visible.

FlowVersionView

Represents the version of a flow definition. This object is available in API version 46.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Fields

Field	Details
<code>ApiVersion</code>	Type double Properties Filter, Nillable, Sort Description The API version for the flow definition. Every flow version has an API version specified at creation. This field is available in API version 50.0 and later.
<code>ApiVersionRuntime</code>	Type double Properties Filter, Nillable, Sort Description The API version for running the flow. This value determines which versioned run-time behavior improvements are adopted by the flow version. If not specified when the flow or flow version is created, the latest available API version is used as the API version for running the flow. When an existing flow is saved as a new flow or flow version, the existing flow's run-time API version is used in the new flow or flow version. This field is available in API version 50.0 and later.
<code>AreMetricsLoggedToDataCloud</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this flow's metrics are logged in Data Cloud. The default value is false. This field is available in API version 63.0 and later.
<code>CapabilityType</code>	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The capability that integrates with the flow. An example value is <code>PromptTemplateType://SalesEmail</code> .
CapacityCategory	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The category that determines the usage limits of the flow. Possible values are: Marketing Cloud Flow This field is available in API version 62.0 and later.
Description	Type string Properties Filter, Group, Nillable, Sort Description Flow version information, specified by the org's admin.
DurableId	Type string Properties Filter, Group, Nillable, Sort Description The ID of the flow version.
FlowDefinitionViewId	Type string Properties Filter, Nillable, Sort Description The ID of the flow definition. This field s a relationship field. Relationship Name FlowDefinitionView Relationship Type Lookup Refers To FlowDefinitionView

Field	Details
IsSwingFlow	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the flow is built with Desktop Flow Designer. This field is available in API version 49.0 and later. Default: false
IsTemplate	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the process or flow is a template. When installed from managed packages, processes and flows can't be viewed or cloned by subscribers because of intellectual property (IP) protection. But when those processes and flows are templates, subscribers can open them in a builder, clone them, and customize the clones. Available in API version 46.0 and later. Default: false
Label	Type string Properties Filter, Group, Nillable, Sort Description The label of the flow version.
ProcessType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of the flow. Valid values are: • <code>ActionableEventManagerFlow</code>—A flow that triggers an actionable event orchestration process in the background and automatically executes different types of actions based on the event type. This value is available in API version 62.0 and later. • <code>ActionCadenceAutoLaunchedFlow</code>—A flow executed when a user completes a cadence step. This value is available in API version 56.0 and later.

Field	Details
	• ActionCadenceStepFlow—A screen flow used as a cadence step. This value is available in API version 56.0 and later. • ActivityObjectMatchingFlow—A flow that launches when Einstein Activity Capture detects and captures a new activity, such as an email. This type of flow runs in the background without user interaction. This value is available with Sync Email as Salesforce Activity in API version 64.0 and later. • Appointments—A flow for Lightning Scheduler. This value is available in API version 44.0 and later. • ActivityObjectMatchingFlow—A flow that launches when Einstein Activity Capture detects and captures a new activity, such as an email. This type of flow runs in the background without user interaction. This value is available with Sync Email as Salesforce Activity in API version 63.0 and later. • ApprovalWorkflow—An orchestration for approvals. This value is available in API version 62.0 and later. • AutoLaunchedFlow—A flow that doesn't require user interaction. • CheckoutFlow—A flow used in Lightning B2B Commerce to create a checkout in a store. This value is available in API version 48.0 and later. • ContactRequestFlow—A flow that lets customers request that customer support get back to them. This flow is used to create contact request records. This value is available in API version 45.0 and later. • CustomerLifecycle—A Salesforce Surveys flow that lets you associate survey questions with different stages in customer lifecycles. This value is available in API version 49.0 and later and only when the Customer Lifecycle Designer license is enabled. • CustomEvent—A process that is invoked when it receives a platform event message. In the UI, it's an event process. This value is available in API version 41.0 and later. • DataCaptureFlow—A flow that configures the Form tab on Work Order Overview or the related list for a service appointment or a work order line item. This value is available in API version 62.0 and later. • DcvrFrameworkDataCaptureFlow—A screen flow that presents assessment questions from Discovery Framework. Launches when invoked by a user on a mobile device. This type of flow collects or displays information, requires user interaction, and works offline or online. This value is available in API version 62.0 and later. • FieldServiceMobile—A flow for the Field Service mobile app. This value is available in API version 39.0 and later. • FieldServiceWeb—A flow for embedded Appointment Booking. Its UI label is Field Service Embedded Flow. This value is available in API version 41.0 and later. • Flow—A flow that requires user interaction because it contains one or more screens or local actions, choices, or dynamic choices. In the UI and Salesforce Help, it's a screen flow. Screen flows can be launched from the UI, such as with a flow action, Lightning page, or web tab.

Field	Details
	• <code>FSClending</code>—A flow for Financial Services Cloud Mortgage. This value is available in API version 46.0 and later. • <code>FSClending</code>—A flow for login. This value is available in API version 51.0 and later. • <code>IdentityUserRegistrationFlow</code>—A flow to handle user registration and updates for single sign-on with the authentication provider framework. Available in API version 64.0 and later. • <code>IndicatorResultFlow</code>—A flow for Outcome Management that calculates and creates indicator results for a selected indicator performance period. This value is available with the Outcome Management license in API version 60.0 and later. • <code>IndividualObjectLinkingFlow</code>—A screen flow that helps search for contacts, leads, person accounts, and employees and links them to support interactions. This value is available in API version 58.0 and later. • <code>InvocableProcess</code>—A process that can be invoked by another process or the Invocable Actions resource in REST API. This value is available in API version 38.0 and later. • <code>LoyaltyManagementFlow</code>—A flow for the Loyalty Management app and can be invoked by loyalty program processes. This value is available in API version 54.0 and later. • <code>PromptFlow</code>—A flow for Prompt Builder. Pass data between Prompt Builder and the flow. This value is available in API version 60.0 and later. • <code>RoutingFlow</code>—A flow for Salesforce Omni-Channel routing and other business logic. This value is available in API version 52.0 and later. • <code>StageManagementEvaluationFlow</code>—A flow for evaluating custom criteria for a stage or step in Stage Management. This value is available in API version 63.0 and later. • <code>Survey</code>—A flow for Salesforce Surveys. From the UI, this type of flow is created in Survey Builder. This value is available in API version 42.0 and later. • <code>SurveyEnrich</code>—A Salesforce Surveys flow that uses the Survey Data Mapper. From the UI, this type of flow is created in the Survey Builder and requires an associated survey flow type. This value is available in API version 49.0 or later and only when the Customer Lifecycle Designer license is enabled. • <code>Workflow</code>—A process that is invoked when a record is created or edited. In the UI and Salesforce Help, it's a record change process. These values are reserved for future use. • <code>ActionCadenceFlow</code> • <code>ActionPlan</code> • <code>ActivitySmartMatchingFlow</code> • <code>AppProcess</code> • <code>CartAsyncFlow</code> • <code>DigitalForm</code>

Field	Details
	• Journey • JourneyBuilderIntegration • LoginFlow • ManagedContentFlow • OrchestrationFlow • RecommendationStrategy • SalesEntryExperienceFlow • TransactionSecurityFlow • UserProvisioningFlow This value has significant impact on validation when saving the flow and on the flow's runtime behavior. Don't change this value unless you understand the flow properties of the specified type. Across flow versions, you can change the type only from <code>Flow</code> to <code>AutoLaunchedFlow</code> or vice versa. Before you change the flow type, make sure that the flow contains only elements, resources, and functionality that the new flow type supports.
RunInMode	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The mode that the flow runs in. Valid values are: • <code>DefaultMode</code> — The flow version runs in system or user context, depending on how the flow is launched. • <code>SystemModeWithSharing</code> — The flow version always runs in system mode with sharing. The flow respects org-wide default settings, role hierarchies, sharing rules, manual sharing, teams, and territories. But it doesn't respect object permissions, field-level access, or other permissions of the running user.
Status	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The flow's status. • Active • Draft • Obsolete • InvalidDraft

Field	Details
VersionNumber	Type int Properties Filter, Group, Nillable, Sort Description The flow's version number.

Usage

Use this object to query information about flow versions. A query must be filtered by `DurableId` or `FlowDefinitionViewId` to get results.

Folder

Represents a repository for a Dashboard, Document, EmailTemplate, Macro, QuickText, or Report. Only one type of item can be contained in a folder.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

- You must have the “Modify All Data” permission to create, update, or delete document folders and email template folders.
- Guest and Customer Portal users can’t access this object.
- To query this object, no special permissions are needed.
- As of API version 35.0, when a folder is shared with a role, it is only visible to users in that role. Superior roles in the role hierarchy don’t gain visibility.
- If analytics folder sharing is turned on, then users need these permissions to create and manage report folders and dashboard folders:
 - “Create Dashboard Folders”
 - “Create Report Folders”
- To use folders for macros and quick text, enable folders for these objects in Setup on the Macro Settings and Quick Text Settings pages.

Fields

Field	Details
AccessType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. Indicates who can access the Folder. Available values include: • Hidden—Folder is hidden from everyone. • Public—Folder is accessible by all users. • Shared—Folder is accessible only by a User in a particular Group or UserRole. The API doesn't allow you to view, insert, or update which group or Role the Folder is shared with.  Note: If analytics folder sharing is turned on for your organization, then this field is present but not used.
DeveloperName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Label is Folder Unique Name.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
IsReadOnly	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this Folder is read-only (<code>true</code>) or editable (<code>false</code>). Label is <i>Read Only</i>.  Note: If analytics folder sharing is turned on for your organization, then this field is present but not used.

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Label of the folder as it appears in the user interface. Label is Document Folder Label.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, NamespacePrefix is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, NamespacePrefix is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
ParentId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the parent object, if any.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Required. Type of objects contained in the Folder. This field can't be updated. Available values include: • Dashboard • Document

Field	Details
	- Email (for Salesforce Classic email templates) - EmailTemplate (for Lightning email templates) - Macro - QuickText - Report

Usage

Only one type of item can be contained in a folder, either Dashboard, Document, EmailTemplate, Macro, QuickText, or Report.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

FolderedContentDocument

Represents the relationship between a parent and child ContentFolderItem in a ContentWorkspace.

Supported Calls

`describeSObjects()`

Fields

Field Name	Details
ContentDocumentId	Type reference Properties Filter, Group, Sort Description ID of the ContentDocument that can be in a folder. This is a relationship field. Relationship Name ContentDocument Relationship Type Lookup Refers To ContentDocument

Field Name	Details
ContentSize	Type int Properties Filter, Group, Nillable, Sort Description The size of the document in bytes for files smaller than 2 GB. In API version 66.0 and later, we recommend that you use the <code>ContentSizeLong</code> field even for documents smaller than 2 GB.
ContentSizeLong	Type long Properties Filter, Group, Nillable, Sort Description The size of the document in bytes up to 10 GB. This field is available in API version 66.0 and later.
FileExtension	Type string Properties Filter, Group, Nillable, Sort Description File extension of the ContentDocument.
FileType	Type string Properties Filter, Group, Nillable, Sort Description File type of the ContentDocument.
IsFolder	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates that the FolderedContentDocument is a folder, rather than a file.
ParentContentFolderId	Type reference

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description ID of the ContentFoldr the ContentDocument resides in. This is a relationship field. Relationship Name ParentContentFolder Relationship Type Lookup Refers To ContentFolder
Title	Type string Properties Filter, Group, idLookup, Sort Description Name of the file or folder in a ContentFolder.

ForecastingAdjustment

This object represents an individual forecast manager's adjustment for a subordinate's or child territory's forecast via a ForecastingItem. Available in API versions 26.0 and later. This object is different from the ForecastingOwnerAdjustment object, which represents forecast users' adjustments of their own forecasts, including territory forecasts they own.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only standard users with the View All Forecasts or Allow Forecasting permission or delegated forecast manager status can access this object.

Fields

Field Name	Details
AdjustedAmount	Type double Properties Create, Filter, Sort, Update Description The revenue amount of an individual forecast item, after an adjustment.
AdjustedQuantity	Type double Properties Create, Filter, Sort, Update Description The quantity amount of an individual forecast item, after an adjustment. This field is available in API version 28.0 and later.
AdjustmentNote	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description A text note providing information about the adjustment. The maximum length is 255 characters. This field doesn't appear in reports.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The currency code of the adjustment. If omitted, the default is the user's personal currency.
ForecastCategoryName	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The category within the sales cycle that an opportunity is assigned to based on its opportunity stage. The standard forecast categories are Pipeline, Best Case,

Field Name	Details
	Commit, Omitted, and Closed. You can add a Most Likely category and can customize forecast category names in single category rollups. The forecast categories display information for that specific category; for example, Best Case only reflects amounts in the Best Case category.
ForecastingGroupItemId	Type reference Properties Create, Filter, Group, Nillable, Sort Description If a forecast group is assigned to the forecast type, the ID of the group value that the manager adjustment belongs to. This field is a relationship field. Available in API version 60.0 and later. Relationship Name ForecastingGroupItem Relationship Type Lookup Refers To ForecastingGroupItem
ForecastingItemCategory	Type picklist Properties Create, Filter, Group, Sort Description The category the forecast belongs to. For individual forecast category rollups, the possible values are: • PipelineOnly—Rollup from Pipeline opportunities only. • BestCaseOnly—Rollup from Best Case opportunities only. The value in this category is adjustable. • MostLikelyOnly—Rollup from Most Likely opportunities only. The value in this category is adjustable. • CommitOnly—Rollup from Commit opportunities only. The value in this category is adjustable. For cumulative forecast rollups, the possible values are: • OpenPipeline—Rollup from Pipeline, Best Case, Most Likely, and Commit opportunities. • BestCaseForecast—Rollup from Best Case, Most Likely, Commit, and Closed opportunities. The value in this category is adjustable. • MostLikelyForecast—Rollup from Most Likely, Commit, and Closed opportunities. The value in this category is adjustable.

Field Name	Details
	- CommitForecast—Rollup from Commit and Closed opportunities. The value in this category is adjustable. For either cumulative or individual forecast category rollups, the possible values are: - ClosedOnly —Rollup from Closed opportunities only.
ForecastingItemId	Type reference Properties Filter, Group, Sort Description The ID of the related ForecastingItem.
ForecastingTypeId	Type reference Properties Create, Filter, Group, Sort Description The ID of the related ForecastingType.
IsAmount	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, then the adjustment is made in a revenue amount. If <code>false</code>, then <code>IsQuantity</code> must be <code>true</code>. This field is available in API version 28.0 and later.
IsQuantity	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, then the adjustment is made in a quantity amount. If <code>false</code>, then <code>IsAmount</code> must be <code>true</code>. This field is available in API version 28.0 and later.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort

Field Name	Details
	Description The ID of the forecast owner.
PeriodId	Type reference Properties Filter, Group, Nillable, Sort Description Period ID for the adjustment. Read only.
ProductFamily	Type picklist Properties Create, Filter, Group, Nillable, Sort Description The Product Family for the adjustment. Read only. This field is available in API version 29.0 and later.
StartDate	Type date Properties Create, Filter, Group, Sort Description The start of the adjustment, expressed as month and year. The date can include any day in a given month. Stored using the first date of the month.
Territory2Id	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the territory to forecast on. Available in API version 43.0 and later.

Usage

Use this object to obtain a manager's adjustment detail for a specified `ForecastingItem`. The `ForecastingAdjustment` object is visible to all users, but only forecast managers and users above them in the forecast hierarchy can read or write `ForecastingAdjustment` records.



Note: Beginning with API version 30.0, organizations can have more than one forecasting type enabled. The `ForecastingQuota`, `ForecastingAdjustment`, `ForecastingOwnerAdjustment`, `ForecastingItem`, and `ForecastingFact` objects can all have records with different `ForecastingTypeId` values. Use the `ForecastingType`

object to determine the ID for each forecast type and then filter `ForecastingQuota`, `ForecastingAdjustment`, `ForecastingItem`, or `ForecastingFact` records as necessary.

The `ForecastingItemCategory` field differs from the `ForecastCategoryName` field.

- The `ForecastCategoryName` field represents the forecast category of the *underlying opportunities* rolling up to forecast amounts. In organizations using cumulative forecast rollups, the `ForecastCategoryName` field can be null because the cumulative forecast amounts include opportunities from multiple forecast categories.
- The new `ForecastingItemCategory` field represents the *type of rollup* a forecast amount or adjustment is from. In organizations using individual forecast category columns, it contains the individual forecast rollup categories. In organizations using cumulative forecast rollups, it contains the cumulative rollup categories.

When inserting manager adjustments, the values you insert for `ForecastCategoryName` and `ForecastingItemCategory` must be compatible with each other. In organizations using cumulative forecast rollups, the `ForecastCategoryName` is nillable. The following pairs are valid.

For individual forecast category rollups:

- `ForecastCategoryName: BestCase, ForecastingItemCategory: BestCaseOnly`
- `ForecastCategoryName: MostLikely, ForecastingItemCategory: MostLikelyOnly`
- `ForecastCategoryName: Commit, ForecastingItemCategory: CommitOnly`

For cumulative forecast category rollups:

- `ForecastCategoryName: null, ForecastingItemCategory: BestCaseForecast`
- `ForecastCategoryName: null, ForecastingItemCategory: MostLikelyForecast`
- `ForecastCategoryName: null, ForecastingItemCategory: CommitForecast`

SEE ALSO:

[ForecastingFact](#)

[ForecastingItem](#)

[ForecastingQuota](#)

ForecastingColumnDefinition

Represents a custom calculated column or a custom reference data column in a forecast type. This object is available in API version 56.0 and later.

For a custom calculated column, a `Formula` field value is required. For a custom reference data column, a `ReferenceField` field value is required.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The developer (API) name of the custom calculated column or custom reference data column.
ForecastingTypeId	Type reference Properties Create, Filter, Group, Sort Description The ID of the forecast type. This field is a relationship field. Relationship Name ForecastingType Relationship Type Lookup Refers To ForecastingType
Formula	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Required for custom calculated columns. The formula for the custom calculated column. Use API column names in your formula (such as ForecastAmount0), not column header names (such as Closed or Closed Only). For details on API column names, operators, and functions to use in formulas, see ForecastingColumnDefinition Formula Field Details. Example The following formula calculates the gap to quota: <code>ForecastingQuotaAmount - ForecastAmount0</code>
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the custom calculated column or custom reference data column.

Field	Details
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The label for this object, which displays in Setup and in the column header on the forecasts page. The label is in the default language locale for the organization. If there's no default language locale, the label is in en_US.
ReferenceField	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Required for custom reference data columns. The number or currency custom field from the ForecastingCustomData object. For example, <code>ForecastingCustomData.Realized_Revenue__c</code>. Data from this field appears in a column in the forecasts summary. This field is available in API version 58.0 and later.
ResultField	Type string Properties Create, Filter, Group, Sort, Update Description The field name to represent the custom calculated column or custom reference data column result. Possible values are: Custom Calculated Column Result • CalculatedAmount0 or CalculatedQuantity0 • CalculatedAmount1 or CalculatedQuantity1 • CalculatedAmount2 or CalculatedQuantity2 • CalculatedAmount3 or CalculatedQuantity3 • CalculatedAmount4 or CalculatedQuantity4 If the formula's result is null or invalid, "-" is the value. For example, if the formula divided by 0. If you want to show "-" for 0 or negative values in your forecast, use the IF function in your formula to detect 0 or negative numbers. Custom Reference Data Column Result Use the appropriate field based on whether your column output is of Currency or Number type. • ExtensionCurrency0 or ExtensionNumber0 • ExtensionCurrency1 or ExtensionNumber1 • ExtensionCurrency2 or ExtensionNumber2 • ExtensionCurrency3 or ExtensionNumber3

Field	Details
	ExtensionCurrency4 or ExtensionNumber4

Usage

Each forecast type can include any combination of custom calculated columns and reference data columns, as long as they don't exceed five in number. For example, a forecast type can have two custom calculated columns and three custom reference data columns.

Custom calculated columns can't be adjusted and aren't included in rollups. In the UI, custom calculated columns can't indicate changes in the last 7 days.

If you have at least one custom calculated column in an active or inactive forecast type, you can't do the following until you've removed the column.

- Switch from single category to cumulative rollups in Forecast Settings
- Enable the Most Likely category
- Disable Show Quotas (only if your custom calculated column's formula refers to a quota value)

ForecastingColumnDefinition Formula Field Details

Use these API names, operators, and functions to construct formulas for the Formula field in the ForecastingColumnDefinition object. The API names apply to both singular and cumulative category rollups. For simplification, we included only the single category rollup column header name next to each API name.

ForecastingColumnDefinition Formula Field Details

Use these API names, operators, and functions to construct formulas for the Formula field in the ForecastingColumnDefinition object. The API names apply to both singular and cumulative category rollups. For simplification, we included only the single category rollup column header name next to each API name.

API Column Names – General

- ForecastingQuotaAmount – Quota (currency)
- ForecastingQuotaQuantity – Quota quantity (double)
- DeveloperName* of any custom calculated column or custom reference data column shown in the forecasts page

API Column Names for Forecast Category Columns

If the Most Likely category isn't enabled:

- ForecastAmount0 or ForecastQuantity0 – Closed
- ForecastAmount1 or ForecastQuantity1 – Commit
- ForecastAmount2 or ForecastQuantity2 – Best Case
- ForecastAmount3 or ForecastQuantity3 – Pipeline

If the Most Likely category is enabled:

- ForecastAmount0 or ForecastQuantity0 – Closed
- ForecastAmount1 or ForecastQuantity1 – Commit
- ForecastAmount2 or ForecastQuantity2 – Most Likely
- ForecastAmount3 or ForecastQuantity3 – Best Case

- ForecastAmount4 or ForecastQuantity4 – Pipeline

API Column Names for Adjustment Columns – Original Forecast Value Without Adjustments

If your org shows adjustments in columns, use these API column names for the original forecast value without adjustments. Adjustment columns are available in API version 60.0 and later.

If the Most Likely category isn't enabled:

- AmountWithoutAdjustments1 or QuantityWithoutAdjustments1 – Commit
- AmountWithoutAdjustments2 or QuantityWithoutAdjustments2 – Best Case

If the Most Likely category is enabled:

- AmountWithoutAdjustments1 or QuantityWithoutAdjustments1 – Commit
- AmountWithoutAdjustments2 or QuantityWithoutAdjustments2 – Most Likely
- AmountWithoutAdjustments3 or QuantityWithoutAdjustments3 – Best Case

API Column Names for Adjustment Columns – Team Adjustment Value

If your org shows adjustments in columns, use these API column names for the team's adjusted value that includes a subordinate's owner and manager adjustments, but not a forecast manager's owner and manager adjustments. These adjustment columns are available in API version 61.0 and later.

If the Most Likely category isn't enabled:

- SubordinateOverrideAmount1 or SubordinateOverrideQuantity1 - Commit
- SubordinateOverrideAmount2 or SubordinateOverrideQuantity2 - Best Case

If the Most Likely category is enabled:

- SubordinateOverrideAmount1 or SubordinateOverrideQuantity1 - Commit
- SubordinateOverrideAmount2 or SubordinateOverrideQuantity2 - Most Likely
- SubordinateOverrideAmount3 or SubordinateOverrideQuantity3 - Best Case

Use these API column names for the team's adjusted value that includes owner adjustments without manager adjustments. The adjustment value includes a subordinate's manager adjustments that they made. These adjustment columns are available in API version 60.0 and later.

If the Most Likely category isn't enabled:

- AmountWithoutManagerAdjustment1 or QuantityWithoutManagerAdjustment1 – Commit
- AmountWithoutManagerAdjustment2 or QuantityWithoutManagerAdjustment2 – Best Case

If the Most Likely category is enabled:

- AmountWithoutManagerAdjustment1 or QuantityWithoutManagerAdjustment1 – Commit
- AmountWithoutManagerAdjustment2 or QuantityWithoutManagerAdjustment2 – Most Likely
- AmountWithoutManagerAdjustment3 or QuantityWithoutManagerAdjustment3 – Best Case

API Column Names for Adjustment Columns – My Adjusted Value

The column that represents the adjusted value from the forecast user viewing the page is the same as the API column name for the standard forecast category. Adjustment columns are available in API version 60.0 and later.

If the Most Likely category isn't enabled:

- ForecastAmount1 or ForecastQuantity1 – My Commit
- ForecastAmount2 or ForecastQuantity2 – My Best Case

If the Most Likely category is enabled:

- ForecastAmount1 or ForecastQuantity1 – My Commit
- ForecastAmount2 or ForecastQuantity2 – My Most Likely
- ForecastAmount3 or ForecastQuantity3 – My Best Case

API Column Names for Custom Reference Data

Use the appropriate field based on whether the custom reference data is of Currency or Number type.

- ExtensionCurrency0
- ExtensionCurrency1
- ExtensionCurrency2
- ExtensionCurrency3
- ExtensionCurrency4
- ExtensionNumber0
- ExtensionNumber1
- ExtensionNumber2
- ExtensionNumber3
- ExtensionNumber4

Supported Math Operators

- + (Add) – Calculates the sum of two values.
- - (Subtract) – Calculates the difference of two values.
- * (Multiply) – Multiplies its values.
- / (Divide) – Divides its values.
- () (Open Parenthesis and Closed Parenthesis) – Specifies that the expressions within the open parenthesis and close parenthesis are evaluated first. All other expressions are evaluated using standard operator precedence.

Supported Logical Operators

- = and == (Equal) – Evaluates if two values are equivalent. The = and == operators are interchangeable.
- <> and != (Not Equal) – Evaluates if two values aren't equivalent.
- < (Less Than) – Evaluates if a value is less than the value that follows this symbol.
- > (Greater Than) – Evaluates if a value is greater than the value that follows this symbol.
- <= (Less Than or Equal) – Evaluates if a value is less than or equal to the value that follows this symbol.
- >= (Greater Than or Equal) – Evaluates if a value is greater than or equal to the value that follows this symbol.

Supported Functions

- IF – Determines if expressions are true or false. Returns a given value if true and another value if false.
- NULL can be used as a constant. For example, `IF ( (expression) < 0, NULL, (expression) )`.

ForecastingColumnDefinitionLocalization

Represents the translated value of a custom calculated column or custom reference data column label when the Translation Workbench is enabled for your organization. This object is available in API version 56.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Translation Workbench must be enabled for your org.

Fields

Field	Details
Language	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The language of the translated label. Possible values are: • <code>af</code>—Afrikaans • <code>am</code>—Amharic • <code>ar</code>—Arabic • <code>ar_AE</code>—Arabic (United Arab Emirates) • <code>ar_BH</code>—Arabic (Bahrain) • <code>ar_DZ</code>—Arabic (Algeria) • <code>ar_EG</code>—Arabic (Egypt) • <code>ar_IQ</code>—Arabic (Iraq) • <code>ar_JO</code>—Arabic (Jordan) • <code>ar_KW</code>—Arabic (Kuwait) • <code>ar_LB</code>—Arabic (Lebanon) • <code>ar_LY</code>—Arabic (Libya) • <code>ar_MA</code>—Arabic (Morocco) • <code>ar_OM</code>—Arabic (Oman) • <code>ar_QA</code>—Arabic (Qatar) • <code>ar_SA</code>—Arabic (Saudi Arabia) • <code>ar_SD</code>—Arabic (Sudan) • <code>ar_SY</code>—Arabic (Syria) • <code>ar_TN</code>—Arabic (Tunisia) • <code>ar_YE</code>—Arabic (Yemen) • <code>bg</code>—Bulgarian

Field	Details
	• bn—Bengali • bs—Bosnian • ca—Catalan • cs—Czech • cy—Welsh • da—Danish • de—German • de_AT—German (Austria) • de_BE—German (Belgium) • de_CH—German (Switzerland) • de_LU—German (Luxembourg) • el—Greek • el_CY—Greek (Cyprus) • en_AE—English (United Arab Emirates) • en_AU—English (Australian) • en_BE—English (Belgium) • en_CA—English (Canadian) • en_CY—English (Cyprus) • en_DE—English (Germany) • en_GB—English (UK) • en_HK—English (Hong Kong) • en_IE—English (Ireland) • en_IL—English (Israel) • en_IN—English (Indian) • en_MT—English (Malta) • en_MY—English (Malaysian) • en_NL—English (Netherlands) • en_NZ—English (New Zealand) • en_PH—English (Philippines) • en_SG—English (Singapore) • en_US—English • en_ZA—English (South Africa) • eo—Esperanto (Pseudo) • es—Spanish • es_AR—Spanish (Argentina) • es_BO—Spanish (Bolivia) • es_CL—Spanish (Chile) • es_CO—Spanish (Colombia)

Field	Details
	• es_CR—Spanish (Costa Rica) • es_DO—Spanish (Dominican Republic) • es_EC—Spanish (Ecuador) • es_GT—Spanish (Guatemala) • es_HN—Spanish (Honduras) • es_MX—Spanish (Mexico) • es_NI—Spanish (Nicaragua) • es_PA—Spanish (Panama) • es_PE—Spanish (Peru) • es_PR—Spanish (Puerto Rico) • es_PY—Spanish (Paraguay) • es_SV—Spanish (El Salvador) • es_US—Spanish (United States) • es_UY—Spanish (Uruguay) • es_VE—Spanish (Venezuela) • et—Estonian • eu—Basque • fa—Farsi • fi—Finnish • fr—French • fr_BE—French (Belgium) • fr_CA—French (Canadian) • fr_CH—French (Switzerland) • fr_LU—French (Luxembourg) • fr_MA—French (Morocco) • ga—Irish • gu—Gujarati • haw—Hawaiian • hi—Hindi • hmn—Hmong • hr—Croatian • ht—Haitian Creole • hu—Hungarian • hy—Armenian • in—Indonesian • is—Icelandic • it—Italian • it_CH—Italian (Switzerland)

Field	Details
	• iw—Hebrew • iw_EO—Esperanto RTL (Pseudo) • ja—Japanese • ji—Yiddish • ka—Georgian • kk—Kazakh • kl—Greenlandic • km—Khmer • kn—Kannada • ko—Korean • lb—Luxembourgish • lt—Lithuanian • lv—Latvian • mi—Te reo • mk—Macedonian • ml—Malayalam • mr—Marathi • ms—Malay • mt—Maltese • my—Burmese • nl_BE—Dutch (Belgium) • nl_NL—Dutch • no—Norwegian • pa—Punjabi • pl—Polish • pt_BR—Portuguese (Brazil) • pt_PT—Portuguese (European) • rm—Romansh • ro—Romanian • ro_MD—Romanian (Moldova) • ru—Russian • ru_AM—Russian (Armenia) • ru_BY—Russian (Belarus) • ru_KG—Russian (Kyrgyzstan) • ru_KZ—Russian (Kazakhstan) • ru_LT—Russian (Lithuania) • ru_MD—Russian (Moldova) • ru_PL—Russian (Poland)

Field	Details
	• ru-UA—Russian (Ukraine) • sh—Serbian (Latin) • sh_ME—Montenegrin • sk—Slovak • sl—Slovene • sm—Samoan • sq—Albanian • sr—Serbian (Cyrillic) • sv—Swedish • sw—Swahili • ta—Tamil • te—Telugu • th—Thai • tl—Tagalog • tr—Turkish • uk—Ukrainian • ur—Urdu • vi—Vietnamese • xh—Xhosa • zh_CN—Chinese (Simplified) • zh_HK—Chinese (Hong Kong) • zh_MY—Chinese (Malaysia) • zh_SG—Chinese (Singapore) • zh_TW—Chinese (Traditional) • zu—Zulu
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This

Field	Details
	field's value is the namespace prefix of the Developer Edition org of the package developer. In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
ParentId	Type reference Properties Create, Filter, Group, Sort Description The ID of the related custom column definition. This field is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To ForecastingColumnDefinition
Value	Type textarea Properties Create, Filter, Sort, Update Description The translated label of the custom calculated column or custom reference data column.

ForecastingCustomCategory

Represents a custom forecasting category used for forecast rollups. This object is available in API version 62.0 and later.

In API version 62.0, this object is available for rollup of Manager Judgments only.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
CanHaveQuotas	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether forecasts in the custom category can have quotas. The default value is <code>false</code>. Available in API version 63.0 and later.
Description	Type textarea Properties Filter, Group, Nillable, Sort Description A user-defined description of the custom category.
DeveloperName	Type string Properties Filter, Group, Sort Description The developer name of the custom category.
DisplayPosition	Type int Properties Filter, Group, Nillable, Sort Description Indicates the placement of the custom category column among the other columns on the forecasts page.
ForecastingSourceDefinitionId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the forecasting source definition. This field is a relationship field. Relationship Name ForecastingSourceDefinition

Field	Details
	Refers To ForecastingSourceDefinition
ForecastingTypeId	Type reference Properties Filter, Group, Sort Description The ID of the related ForecastingType. This field is a relationship field. Relationship Name ForecastingType Refers To ForecastingType
IsAdjustable	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether forecast managers can adjust forecasts in the custom category. The default value is <code>false</code> .
IsAmount	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code> , then the adjustment is made in a revenue amount. If <code>false</code> , then <code>IsQuantity</code> must be <code>true</code> . The default value is <code>false</code> . Available in API version 63.0 and later.
IsHidden	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the custom category is hidden. The default value is <code>false</code> . Available in API version 63.0 and later.
IsOwnerAdjustable	Type boolean

Field	Details
	Properties Defaulted on create, Filter, Group, Sort Description Indicates whether all forecast users can adjust their own forecasts in the custom category, including the territory forecasts that they own. The default value is <code>false</code>.
IsQuantity	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, then the adjustment is made in a quantity amount. If <code>false</code>, then <code>IsAmount</code> must be <code>true</code>. The default value is <code>false</code>. Available in API version 63.0 and later.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language of the custom category.
MasterLabel	Type string Properties Filter, Group, Sort Description The label for this column. The label is in the default language locale for the organization. If there's no default language locale, the label is in <code>en_US</code>.
MeasureFieldOverride	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The measure that this custom category supports. Possible values are: • <code>Opportunity.Amount</code> • <code>Opportunity.AmountCustom__c</code> • <code>Opportunity.AmountRSF__c</code> • <code>Opportunity.TotalOpportunityQuantity</code> • <code>OpportunityLineItem.Quantity</code>

Field	Details
	• <code>OpportunityLineItem.TotalPrice</code> • <code>OpportunityLineItem.oliCustomAmount__c</code> • <code>OpportunityLineItemSplit.SplitAmount</code> • <code>OpportunitySplit.SplitAmount</code> • <code>OpportunitySplit.customAmount__c</code>
UnitOfMeasure	Type string Properties Filter, Group, Nillable, Sort Description The unit of measure for the specified custom category measure. Available in API version 63.0 and later.

ForecastingCustomData

Represents forecast data from external sources to display in the forecasts page. For example, risk or last year's revenue. This object is available in API version 58.0 and later.

This object doesn't support forecast rollups or adjustments. Number and currency columns are supported only.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Available in Enterprise Edition and above, and in Professional Edition with an add-on license. Access to this object requires the Manage Forecasts Custom Data user permission.

Fields

Field	Details
ForecastOwnerId	Type reference Properties Create, Filter, Group, Sort Description The ID of the forecast owner. This field is a relationship field.

Field	Details
	Relationship Name ForecastOwner Relationship Type Lookup Refers To User
ForecastingGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort Description If a forecast group is assigned to the forecast type, the ID of the group value that the custom data belongs to. This field is a relationship field. Available in API version 60.0 and later. Relationship Name ForecastingGroupItem Relationship Type Lookup Refers To ForecastingGroupItem
ForecastingTypeId	Type reference Properties Create, Filter, Group, Sort Description The ID of the forecast type. This field is a relationship field. Relationship Name ForecastingType Relationship Type Lookup Refers To ForecastingType
PeriodId	Type reference Properties Filter, Group, Nillable, Sort Description Read only. Period ID for the custom data. This field is a relationship field.

Field	Details
	Relationship Name Period
	Relationship Type Lookup
	Refers To Period
ProductFamily	Type picklist
	Properties Create, Filter, Group, Nillable, Sort
	Description The user-defined product family available to forecast on. Each product family is unique. Possible values are: • <i>[user-defined]</i>—For example, Electronics or Appliances. • None
StartDate	Type date
	Properties Create, Filter, Group, Sort
	Description The start of the custom data, expressed as month and year. The date can include any day in a given month. Stored using the first date of the month.
Territory2Id	Type reference
	Properties Create, Filter, Group, Nillable, Sort
	Description The ID of the territory to forecast on.

Usage

Each record displays as a custom column on the forecasts summary page.

ForecastingDisplayedFamily

Represents the table in Forecasts Settings where an admin selects the product families that users can forecast on in Lightning Experience. This object is available in API version 40.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

As of Spring '20 and later, only standard users with the View All Forecasts or Allow Forecasting permission or delegated forecast manager status can access this object.

Fields

Field Name	Details
DisplayPosition	Type int Properties Filter, Group, idLookup, Nillable, Sort Description The order in which product families are displayed on the forecasts page. Each value is unique to a product family.
ProductFamily	Type picklist Properties Filter, Group, Sort Description The product family available to forecast on. Each product family is unique.

ForecastingFact

This object is read-only and links a ForecastingItem with its opportunities, such as opportunities that share the same owner or forecast category and have a closing date within the period of the forecasting item. Available in API versions 26 and greater.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

As of Spring '20 and later, only standard users with the View All Forecasts or Allow Forecasting permission or delegated forecast manager status can access this object.

Fields

Field Name	Details
ForecastCategoryName	Type picklist Properties Filter, Group, Restricted picklist, Sort Description A forecast category is the category within the sales cycle to which an opportunity is assigned based on its opportunity stage. The standard forecast categories are Pipeline, Best Case, Commit, Omitted (not included in forecasts), and Closed. Salesforce admins can customize the forecast category names.
ForecastedObjectId	Type reference Properties Filter, Group, Nillable, Sort Description Contains the Split ID of the forecasted OpportunitySplit object if the forecast data source is opportunity splits or the OpportunityLineItem ID of the forecasted opportunity if the data source is product families. If the data source is product families and the opportunity has no line item, this field is null. If the forecast data source is opportunities, this field is null. This field is available in API version 29 and later. Read-only.
ForecastedSubObjectId	Type reference Properties Filter, Group, Nillable, Sort Description Possible values: • If the forecast data source is OpportunityLineItemSplit, and the opportunity has line items and line item splits, then this field contains the ID of the forecasted OpportunityLineItemSplit object. • If the forecast data source is OpportunityLineItemSplit, and the opportunity has line items but no line item splits, this field contains the ID of the forecasted OpportunitySplit object. • If the forecast data source is OpportunityLineItemSchedule, this field contains the OpportunityLineItemSchedule ID of the forecasted opportunity. • If the forecast data source is OpportunityLineItemSplit and the opportunity has no line item, this field is null. • If the forecast data source is OpportunityLineItemSchedule and the opportunity has no line item, this field is null.

Field Name	Details
	This field is available in API version 58.0 and later. Read-only. This field is a polymorphic relationship field. Relationship Name null Relationship Type Lookup Refers To OpportunityLineItem, OpportunityLineItemSplit
ForecastingItemId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the ForecastingItem.
ForecastingTypeId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the related ForecastingType.
OpportunityId	Type reference Properties Filter, Group, Sort Description The opportunity ID.
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the opportunity owner.
PeriodId	Type reference

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description Period ID for the forecast.
TargetValue	Type double Properties Filter, Nillable, Sort Description Target value of the forecast amount.
Territory2Id	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the territory to forecast on. Available in API version 43 and later.

Usage

Use this object to get information about opportunities linked to forecasting items.

 **Note:** Beginning with API version 30.0, organizations can have more than one forecasting type enabled. The `ForecastingQuota`, `ForecastingAdjustment`, `ForecastingOwnerAdjustment`, `ForecastingItem`, and `ForecastingFact` objects can all have records with different `ForecastingTypeId` values. Use the `ForecastingType` object to determine the ID for each forecast type and then filter `ForecastingQuota`, `ForecastingAdjustment`, `ForecastingItem`, or `ForecastingFact` records as necessary.

SEE ALSO:

- [ForecastingAdjustment](#)
- [ForecastingItem](#)
- [ForecastingQuota](#)

ForecastingFilter

Represents the custom filter for including or excluding data from opportunity forecasts. This object is available in API version 54.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only standard users with the View All Forecasts permission OR Allow Forecasting permission OR delegated forecast manager status can access this object.

Fields

Field Name	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The developer name of the forecast filter.
FilterLogic	Type string Properties Filter, Group, Nillable, Sort Description The logic that controls the evaluation of conditions. Only AND is supported. For example, 1 AND 2 AND 3.
ForecastingTypeId	Type reference Properties Create, Filter, Group, Sort Description The ID of the forecast type. Can be linked only to forecast types created in Summer '21 and later. This is a relationship field. Relationship Name ForecastingType Relationship Type Lookup Refers To ForecastingType

Field Name	Details
ForecastingTypeSourceId	Type reference Properties Create, Filter, Group, Sort Description The ID of the forecast type source. Can be linked only to forecast type sources created in Summer '21 or later and with a forecast source definition with source object of 'Opportunity.' This is a relationship field. Relationship Name ForecastingTypeSource Relationship Type Lookup Refers To ForecastingTypeSource
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the forecast filter.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The label for this object, which displays in Setup. The label is in the default language locale for the organization. If there's no default language locale, the label is in en_US.

ForecastingFilterCondition

Represents the custom filter condition logic for including or excluding data from opportunity forecasts. This object is available in API version 54.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only standard users with the View All Forecasts permission OR Allow Forecasting permission OR delegated forecast manager status can access this object.

Fields

Field Name	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The developer name of the forecast filter condition.
FieldName	Type string Properties Create, Filter, Group, Sort, Update Description The name of the opportunity field to be filtered.
ForecastingFilterId	Type reference Properties Create, Filter, Group, Sort Description The ID of the forecast filter. This is a relationship field. Relationship Name ForecastingFilter Relationship Type Lookup Refers To ForecastingFilter
Language	Type picklist

Field Name	Details
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the forecast filter condition.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The label for this object, which displays in Setup. The label is in the default language locale for the organization. If there's no default language locale, the label is in en_US.
Operation	Type string Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The operator in the filter condition. Possible values are: • equals • greaterOrEqual – greater than or equal to • greaterThan • lessOrEqual – less than or equal to • lessThan • notEqual
SortOrder	Type int Properties Create, Filter, Group, Sort Description The index value for the condition. This value represents the condition in the FilterLogic field in the ForecastingFilter object. For example, 1.
Value	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The value of the filter condition. If multiple values are specified, they must be separated by a comma delimiter.  Note: If you have multiple currencies enabled, and add a custom filter on a currency field as part of your forecast type definition, the corporate currency at the time the filter was created is used. If you have a single currency enabled, the absolute value is used in your filter condition.

Usage

A forecast type can contain up to three filter conditions.

ForecastingGroup

Represents groups used to roll up forecast totals on the forecasts page. For example, group forecasts by industry or sales type. This object is available in API version 60.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Available for forecast types created in Spring '24 or later and that are based on the Opportunity and Opportunity Product objects. You can only add groups to new forecast types.

Fields

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The developer (API) name of the forecast group.

Field	Details
DisplayPosition	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The order in which forecasting dimensions are displayed on the forecasts page. Each value is unique to a dimension.
ForecastingTypeId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the forecast type associated with the forecasting group. This field is a relationship field. Relationship Name ForecastingType Refers To ForecastingType
GroupField	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The field name of the custom picklist used as a group. Possible values include custom, single-selection picklists available in <code>SourceObject</code>.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the custom picklist identified as the group.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update

Field	Details
	Description The label for this object, which displays in Setup. The label is in the default language locale for the organization. If there's no default language locale, the label is in en_US.
SourceObject	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The entity the picklist used for the forecast group is on. Possible values are: • Opportunity • OpportunityLineItem • Product2

Usage

Each forecast group can apply to only one forecast type.

ForecastingGroupItem

Represents the value within the picklist that is specified as the forecasting group for a forecast type. For example, if you have a forecasting group that identifies the industry an opportunity is part of, this object represents the value in the the industry picklist that's chosen to be part of the group. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
DisplayPosition	Type int Properties Create, Filter, Group, Sort, Update Description Indicates the order in which the value displays among other values in the group on the forecasts page.

Field	Details
ForecastingGroupId	Type reference Properties Create, Filter, Group, Sort Description This field is a relationship field. Relationship Name ForecastingGroup Relationship Type Lookup Refers To ForecastingGroup
SourceValueApiName	Type string Properties Create, Filter, Nillable, Sort Description The API name that's derived from the group value.
SourceValueLabel	Type string Properties Filter, Nillable, Sort Description The label that's derived from the group value.
SourceValueTranslatedLabel	Type string Properties Filter, Nillable, Sort Description If one exists, the translated version of the group value.

Usage

New forecast types based on opportunities or opportunity products can include a forecasting group. This group is based on a custom, single-selection picklist that's defined on the Opportunity, OpportunityLineItem, or Product2 objects. The picklist that's chosen for the group can contain more values than are needed for the type.

ForecastingItem

This object is read-only used for individual forecast amounts. Users see amounts based on their perspectives and forecast roles. The amounts users see include one of these values when forecasting in revenue: `AmountWithoutAdjustments`, `AmountWithoutManagerAdjustment`, `ForecastAmount`, `OwnerOnlyAmount`. The amounts users see include one of these values when forecasting in quantity: `QuantityWithoutAdjustments`, `QuantityWithoutManagerAdjustment`, `ForecastQuantity`, `OwnerOnlyQuantity`. Available in API version 26.0 and later.

Other users can see the `ForecastingItem` object, but not its records. See these access guidelines.

- Users with the “View All Forecasts” permission have access to all `ForecastingItem` fields.
- Users without the “View All Forecasts” permission have access to all fields for their own subordinates and child territories.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

As of Spring '20 and later, only standard users with the View All Forecasts or Allow Forecasting permission or delegated forecast manager status can access this object.

Fields

Field Name	Details
<code>AmountWithoutAdjustments</code>	Type double Properties Filter, Sort, Nillable Description The sum of a person's owned revenue opportunities and the person's subordinates' and child territories' opportunities, without adjustments. Subordinates include everyone reporting up to a person in the role-based forecast hierarchy. This amount is visible only on reports.
<code>AmountWithoutManagerAdjustment</code>	Type double Properties Filter, Sort, Nillable Description The forecast number as seen by the forecast owner. This number is the sum of the owner's revenue opportunities and the owner's subordinates' and child territories' opportunities, including adjustments made by the forecast owner on the owner's or subordinates' and child territories' forecasts. It doesn't include

Field Name	Details
	adjustments made by forecast managers above the owner in the forecast hierarchy.
AmountWithoutOwnerAdjustment	Type double Properties Filter, Sort, Nillable Description The forecast amount as seen by the forecast owner without the owner's adjustment. This amount is the sum of the subordinate's and child territories' opportunities, including adjustments made by their manager or by the subordinate themselves, plus the rollup of the owner's own opportunities. <i>It doesn't include adjustments made by the forecast owner.</i>
ForecastAmount	Type double Properties Filter, Sort, Nillable Description The revenue forecast from the forecast manager's perspective and the sum of the owner's and subordinates' and child territories' opportunities, including all forecast adjustments.
ForecastCategoryName	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description A forecast category is the category within the sales cycle to which an opportunity is assigned based on its opportunity stage. The standard forecast categories are Pipeline, Best Case, Commit, Omitted (not included in forecasts), and Closed. Salesforce admins can add a Most Likely category and can customize the forecast category names in single category rollups. Change the forecast category name only. Changing a forecast category's API name can have unintended results.
ForecastQuantity	Type double Properties Filter, Sort, Nillable

Field Name	Details
	Description The quantity forecast from the forecast manager's perspective and the sum of the owner's and subordinates' opportunities, including all forecast adjustments. This field is available in API version 28 and later.
ForecastingGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort Description If a forecast group is assigned to the forecast type, the ID of the group value that the forecast total belongs to. This field is a relationship field. Available in API version 60.0 and later. Relationship Name ForecastingGroupItem Relationship Type Lookup Refers To ForecastingGroupItem
ForecastingItemCategory	Type picklist Properties Filter, Group, Sort Description This field indicates which type of forecast rollup the forecasting item belongs to. Depending on whether your organization uses individual forecast category rollups or cumulative forecast rollups, you have these possible values for the <code>ForecastingItemCategory</code> field. Individual forecast category rollups: • PipelineOnly - Rollup from Pipeline opportunities only. • BestCaseOnly - Rollup from Best Case opportunities only. Adjustable. • MostLikelyOnly - Rollup from Most Likely opportunities only. Adjustable. • CommitOnly - Rollup from Commit opportunities only. Adjustable. Cumulative forecast rollups: • OpenPipeline - Rollup from Pipeline + Best Case + Most Likely + Commit opportunities. • BestCaseForecast - Rollup from Best Case + Most Likely + Commit + Closed opportunities. Adjustable. • MostLikelyForecast - Rollup from Most Likely + Commit + Closed opportunities. Adjustable.

Field Name	Details
	- CommitForecast - Rollup from Commit + Closed opportunities. Adjustable. Either cumulative or individual forecast category rollups: - ClosedOnly - Rollup from Closed opportunities only. The <code>ForecastingItemCategory</code> field differs from the <code>ForecastCategoryName</code> field. - The <code>ForecastCategoryName</code> field represents the forecast category of the <i>underlying opportunities</i> rolling up to forecast amounts. In organizations using cumulative forecast rollups, the <code>ForecastCategoryName</code> field can be null because the cumulative forecast amounts include opportunities from multiple forecast categories. - The new <code>ForecastingItemCategory</code> field represents the <i>type of rollup</i> a forecast amount or adjustment is from. In organizations using individual forecast category columns, it contains the individual forecast rollup categories. In organizations using cumulative forecast rollups, it contains the cumulative rollup categories.
ForecastingTypeId	Type reference Properties Filter, Group, Sort Description The ID of the related ForecastingType.
HasAdjustment	Type boolean Properties Defaulted on create, Filter, Group, Sort Description A flag that indicates the forecasting item includes a <i>manager</i> adjustment. This flag is true only when the item includes an adjustment and the user performing the query has read access to the adjustment.
HasOwnerAdjustment	Type boolean Properties Defaulted on create, Filter, Group, Sort Description A flag that indicates the forecasting item includes an <i>owner</i> adjustment. This flag is true only when the item includes an adjustment and the user performing the query has read access to the adjustment. Available in API version 33.0 and later.

Field Name	Details
IsAmount	Type boolean Properties Defaulted on create, Filter, Group, Sort Description True indicates that the adjustment is made in a revenue amount. If false, then <code>IsQuantity</code> must be true. This field is available in API version 28.0 and later.
IsQuantity	Type boolean Properties Defaulted on create, Filter, Group, Sort Description True indicates that the adjustment is made in a quantity amount. If false, then <code>IsAmount</code> must be true. This field is available in API version 28.0 and later.
IsUpToDate	Type boolean Properties Defaulted on create, Filter, Group, Sort Description A flag indicating whether a specific forecasting item reflects current information. For example, if users are making adjustments that are in process, the item isn't up to date.
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the forecast owner.
OwnerOnlyAmount	Type double Properties Filter, Sort, Nillable Description The sum of a person's revenue opportunities, without adjustments.

Field Name	Details
OwnerOnlyQuantity	Type double Properties Filter, Sort, Nillable Description The sum of a person's quantity opportunities, without adjustments. This field is available in API version 28.0 and later.
ParentForecastingItemId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the ForecastingItem that the current item rolls up to.
PeriodId	Type reference Properties Filter, Group, Nillable, Sort Description Period ID for the forecast.
ProductFamily	Type picklist Properties Filter, Group, Nillable, Sort Description The product family of the forecast item. This field is available in API version 29.0 and later. Read only.
QuantityWithoutAdjustments	Type double Properties Filter, Nillable, Sort Description The sum of a person's owned quantity opportunities and also his or her subordinates' opportunities, without adjustments. Subordinates include everyone reporting up to a person in the forecast hierarchy. This field is available in API version 28.0 and later.

Field Name	Details
QuantityWithoutManagerAdjustment	Type double Properties Filter, Nillable, Sort Description The forecast number as seen by the forecast owner. This number is the sum of the owner's quantity opportunities and subordinates' opportunities, including adjustments made on the subordinates' forecasts. It doesn't include adjustments made by forecast managers above the owner in the forecast hierarchy. This field is available in API version 28 and later.
QuantityWithoutOwnerAdjustment	Type double Properties Filter, Nillable, Sort Description The forecast quantity as seen by the forecast owner without the owner's adjustment. This number is the sum of the subordinate's opportunities, including adjustments made by their manager or by the subordinate themselves, plus the rollup of the owner's own opportunities. <i>It doesn't include adjustments made by the forecast owner.</i> This field is available in API version 38.0 and later.
SubordinateOverrides	Type int Properties Filter, Group, Sort Description The total number of adjustments made to a forecast down the hierarchical chain. For example, User A has a forecast without adjustments. If User A adjusts User B's forecast, User A's SubordinateOverrides value is 1. Then if User B adjusts User C's forecast, User A's SubordinateOverrides value is 2. If User A removes his adjustment from User B's forecast, User A's SubordinateOverrides value is 1. This field is available in API version 38.0 and later.
Territory2Id	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the territory to forecast on. Available in API version 43.0 and later.

Usage

Use this object to obtain individual forecast amounts, either with or without adjustments, based on a user’s perspective and forecast role. The ForecastingItem object is visible to all users, but only forecast managers and users above them in the forecast hierarchy can read or write ForecastingAdjustment records.

 **Note:** Beginning with API version 30.0, organizations can have more than one forecasting type enabled. The ForecastingQuota, ForecastingAdjustment, ForecastingOwnerAdjustment, ForecastingItem, and ForecastingFact objects can all have records with different ForecastingTypeId values. Use the ForecastingType object to determine the ID for each forecast type and then filter ForecastingQuota, ForecastingAdjustment, ForecastingItem, or ForecastingFact records as necessary.

SEE ALSO:

- [ForecastingAdjustment](#)
- [ForecastingFact](#)
- [ForecastingQuota](#)

ForecastingOwnerAdjustment

This object represents an individual forecast user’s adjustment of their *own* forecast, including territory forecasts they own, via a ForecastingItem. Available in API versions 33.0 and later. This object is different from the ForecastingAdjustment object, which represents managers’ adjustments of *subordinates’* and child territories’ forecasts.

Supported Calls

create(), delete(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(), update(), upsert()

Special Access Rules

As of Spring ’20 and later, only standard users with the View All Forecasts or Allow Forecasting permission or delegated forecast manager status can access this object.

Fields

Field Name	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The currency code of the adjustment. If omitted, the default is the importing user’s personal currency.

Field Name	Details
ForecastCategoryName	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The category within the sales cycle that an opportunity is assigned to based on its opportunity stage. The standard forecast categories are Pipeline, Best Case, Commit, Omitted, and Closed. You can add a Most Likely category and can customize forecast category names in single category rollups. The forecast categories display information for that specific category; for example, Best Case only reflects amounts in the Best Case category.
ForecastOwnerId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the forecast owner.
ForecastingGroupItemId	Type reference Properties Create, Filter, Group, Nillable, Sort Description If a forecast group is assigned to the forecast type, the ID of the group value that the owner adjustment belongs to. This field is a relationship field. Available in API version 60.0 and later. Relationship Name ForecastingGroupItem Relationship Type Lookup Refers To ForecastingGroupItem
ForecastingItemCategory	Type picklist Properties Create, Filter, Group, Sort Description This field indicates which type of forecast rollup the owner adjustment belongs to. Depending on whether your organization uses individual forecast category

Field Name

Details

rollups or cumulative forecast rollups, you have these possible values for the `ForecastingItemCategory` field.

Individual forecast category rollups:

- PipelineOnly - Rollup from Pipeline opportunities only.
- BestCaseOnly - Rollup from Best Case opportunities only. Adjustable.
- MostLikelyOnly - Rollup from Most Likely opportunities only. Adjustable.
- CommitOnly - Rollup from Commit opportunities only. Adjustable.

Cumulative forecast rollups:

- OpenPipeline - Rollup from Pipeline + Best Case + Most Likely + Commit opportunities.
- BestCaseForecast - Rollup from Best Case + Most Likely + Commit + Closed opportunities. Adjustable.
- MostLikelyForecast - Rollup from Most Likely + Commit + Closed opportunities. Adjustable.
- CommitForecast - Rollup from Commit + Closed opportunities. Adjustable.

Either cumulative or individual forecast category rollups:

- ClosedOnly - Rollup from Closed opportunities only.

The `ForecastingItemCategory` field differs from the `ForecastCategoryName` field.

- The `ForecastCategoryName` field represents the forecast category of the *underlying opportunities* rolling up to forecast amounts. In organizations using cumulative forecast rollups, the `ForecastCategoryName` field can be null because the cumulative forecast amounts include opportunities from multiple forecast categories.
- The new `ForecastingItemCategory` field represents the *type of rollup* a forecast amount or adjustment is from. In organizations using individual forecast category columns, it contains the individual forecast rollup categories. In organizations using cumulative forecast rollups, it contains the cumulative rollup categories.

When inserting owner adjustments, the values you insert for `ForecastCategoryName` and `ForecastingItemCategory` must be compatible with each other. In organizations using cumulative forecast rollups, the `ForecastCategoryName` is nillable. These pairs are the valid pairs.

Individual forecast category rollups:

- `ForecastCategoryName`: BestCase,
`ForecastingItemCategory`: BestCaseOnly
- `ForecastCategoryName`: Commit,
`ForecastingItemCategory`: CommitOnly

Field Name	Details
	Cumulative forecast category rollups: - ForecastCategoryName:null,ForecastingItemCategory:BestCaseForecast - ForecastCategoryName:null,ForecastingItemCategory:CommitForecast
ForecastingItemId	Type reference Properties Filter, Group, Sort Description The ID of the related ForecastingItem.
ForecastingTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the related ForecastingType.
IsAmount	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, then the adjustment is made in a revenue amount. If <code>false</code>, then <code>IsQuantity</code> must be <code>true</code>.
IsQuantity	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, then the adjustment is made in a quantity amount. If <code>false</code>, then <code>IsAmount</code> must be <code>true</code>.
OwnerAdjustedAmount	Type currency Properties Create, Filter, Nillable, Sort, Update

Field Name	Details
	Description The revenue amount of an individual forecast item, after an adjustment.
OwnerAdjustedQuantity	Type double Properties Create, Filter, Nillable, Sort, Update Description The quantity amount of an individual forecast item, after an adjustment.
OwnerAdjustmentNote	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description A text note providing information about the adjustment. The maximum length is 255 characters. This field does not appear in reports.
PeriodId	Type reference Properties Filter, Group, Nillable, Sort Description Period ID for the adjustment. Read only.
ProductFamily	Type picklist Properties Create, Filter, Group, Nillable, Sort Description The Product Family for the adjustment. Read only.
StartDate	Type date Properties Create, Filter, Group, Nillable, Sort Description The start of the adjustment, expressed as month and year. The date can include any day in a given month. Stored using the first date of the month.

Field Name	Details
Territory2Id	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the territory to forecast on. Available in API version 43.0 and later.

Usage

Use this object to obtain a user's adjustment details for a specified `ForecastingItem` in their own forecast.



Note: Beginning with API version 30.0, organizations can have more than one forecasting type enabled. The `ForecastingQuota`, `ForecastingAdjustment`, `ForecastingOwnerAdjustment`, `ForecastingItem`, and `ForecastingFact` objects can all have records with different `ForecastingTypeId` values. Use the `ForecastingType` object to determine the ID for each forecast type and then filter `ForecastingQuota`, `ForecastingAdjustment`, `ForecastingItem`, or `ForecastingFact` records as necessary.

ForecastingOwnerAdjustmentChangeEvent (API version 62.0)

Change events are available for the object.

ForecastingQuota

This object represents an individual user's or territory's quota for a specified time period. The Managed Quotas user permission is required for creating, updating, or deleting quotas. (Users can only edit their subordinates' or child territories' quotas, not their own.) The View All Forecasts permission is required to view any user's forecast, regardless of the forecast hierarchy. Available in API versions 25.0 and later. Forecast managers can view the forecasts of subordinates and territories below them in the forecast hierarchy.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only standard users with the View All Forecasts or Allow Forecasting permission or delegated forecast manager status can access this object.

Fields

Field Name	Details
CurrencyIsoCode	Type picklist

Field Name	Details
	Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The currency code of the quota. If omitted, the default is the importing user's personal currency.
ForecastingGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort Description If a forecast group is assigned to the forecast type, the ID of the group value that the quota belongs to. This field is a relationship field. Available in API version 60.0 and later. Relationship Name ForecastingGroupItem Relationship Type Lookup Refers To ForecastingGroupItem
ForecastingTypeId	Type reference Properties Create, Filter, Group, Sort Description The ID of the related ForecastingType.
IsAmount	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, then the adjustment is made in a revenue amount. If <code>false</code>, then <code>IsQuantity</code> must be <code>true</code>. This field is available in API version 28.0 and later.
IsQuantity	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field Name	Details
	Description If <code>true</code> , then the adjustment is made in a quantity amount. If <code>false</code> , then <code>IsAmount</code> must be <code>true</code> . This field is available in API version 28.0 and later.
PeriodId	Type reference Properties Filter, Group, Nillable, Sort Description Period ID for the quota. Read only.
ProductFamily	Type picklist Properties Create, Filter, Group, Nillable, Sort Description The product family for the quota. This field is available in API version 29.0 and later.
QuotaAmount	Type currency Properties Create, Filter, Sort, Update Description The revenue quota amount for an individual user or territory and for a specific period.
QuotaOwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID that identifies the quota owner.
QuotaQuantity	Type double Properties Create, Filter, Sort, Update

Field Name	Details
	Description The quantity quota amount for an individual user and for a specific period. This field is available in API version 28.0 and later.
StartDate	Type date Properties Create, Filter, Group, Sort, Update Description The start of the quota, expressed as month and year. The date can include any day in a given month. Stored using the first date of the month.
Territory2Id	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the territory to forecast on. Available in API version 43.0 and later.

Usage

Use this object to get an individual user's or territory's quota for a specified time period.



Note: Beginning with API version 30.0, organizations can have more than one forecasting type enabled. The `ForecastingQuota`, `ForecastingAdjustment`, `ForecastingOwnerAdjustment`, `ForecastingItem`, and `ForecastingFact` objects can all have records with different `ForecastingTypeId` values. Use the `ForecastingType` object to determine the ID for each forecast type and then filter `ForecastingQuota`, `ForecastingAdjustment`, `ForecastingItem`, or `ForecastingFact` records as necessary.

SEE ALSO:

[ForecastingAdjustment](#)

[ForecastingFact](#)

[ForecastingItem](#)

ForecastingShare

Represents forecasts shared between a forecast manager and a user. Available in API version 44.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only standard users with the View All Forecasts or Allow Forecasting permission or delegated forecast manager status can access this object.

Fields

Field Name	Details
<code>AccessLevel</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Whether the user you're sharing your forecasts with can view and adjust the forecasts or view only. This field is new since the pilot. Picklist values: • <code>ViewAndEdit</code> • <code>ViewOnly</code>
<code>SharedForecastManagerRoleId</code>	Type reference Properties Create, Filter, Group, Sort Description The ID of either: • The role of the manager whose forecasts you want to share. • The territory whose forecasts you want to share.
<code>RoleType</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of hierarchy associated with the forecast share. • <code>R</code> - Role-based • <code>T</code> - Territory-based • <code>Y</code> - Territory2-based

Field Name	Details
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description The ID of the user with whom the forecast is shared.

Usage

Use this object to let any stakeholder at your company view and adjust forecast managers' forecasts.

ForecastingSourceDefinition

Represents the object, measure, date type, and hierarchy that a forecast uses to project sales. This object is available in API version 52.0 and later.



Note: The information in this topic applies only to forecast types created in Summer '21 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
CategoryField	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Name of the forecast category that is associated with the forecast type. Possible values are: • <code>Opportunity.ForecastCategoryName</code>
DateField	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description Field that is used for the forecast type's date type. For example, the CloseDate field on Opportunity is used for opportunity close date-based forecast types. Possible values are: • <code>Opportunity.CloseDate</code> • <code>OpportunityLineItem.ServiceDate</code> • <code>OpportunityLineItemSchedule.ScheduleDate</code>
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The developer name of the forecasting source definition.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
FamilyField	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Use this field to group forecasts by product family. Possible values are: • <code>Product2.Family</code>
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Language of the forecasting source definition. For example, English.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Required. Controlling label for this forecasting source definition.
MeasureField	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Field that is used for the forecast type's measure. For example, the Amount field on Opportunity is associated with revenue-based forecast types. Possible values are*: • <code>Opportunity.Amount</code> • <code>Opportunity.Custom</code> • <code>Opportunity.TotalOpportunityQuantity</code> • <code>OpportunityLineItem.Custom</code> • <code>OpportunityLineItem.Quantity</code> • <code>OpportunityLineItem.TotalPrice</code> • <code>OpportunityLineItemSchedule.Custom</code> • <code>OpportunityLineItemSchedule.Quantity</code> • <code>OpportunityLineItemSchedule.Revenue</code> • <code>OpportunitySplit.Custom</code> • <code>OpportunitySplit.SplitAmount</code> *Where Custom represents the name of the custom field that a forecast type's measure is based on. Example: Use <code>Megawatts__c</code> to forecast energy consumption.
SourceObject	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Object associated with this forecasting source definition. Possible values are: • <code>Opportunity</code> • <code>OpportunityLineItem</code> • <code>OpportunityLineItemSchedule</code> • <code>OpportunitySplit</code> • <code>Product2</code>
Territory2Field	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description For a territory-based forecast type, indicates the field that is used for territory information.

Field	Details
	Possible values are: • Opportunity.Territory2Id For user role-based forecast types, this value is null.
UserField	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Specifies who owns the forecast. Possible values are: • Opportunity.OwnerId • OpportunitySplit.SplitOwnerId

Usage

Use ForecastingSourceDefinition to define a forecast type’s structure. A forecasting source definition is joined via ForecastingTypeSource to ForecastingType.

In this example, a user role-based forecast type called Custom Amount Forecast is based on the Amount and Close Date fields on opportunities.

```
ForecastingType type = new sforce.SObject("ForecastingType");
type.DeveloperName = "Custom_Amount_Forecast";
type.MasterLabel = "Custom Amount Forecast";
type.IsAmount = true;
type.IsQuantity = false;
type.RoleType = "R";
type.DateType = "OpportunityCloseDate";
String typeId = insert(type);

ForecastingSourceDefinition sourceDefinition = new
sforce.SObject("ForecastingSourceDefinition")
sourceDefinition.DeveloperName = "Custom Amount Source";
sourceDefinition.MasterLabel = "Custom_Amount_Source";
sourceDefinition.SourceObject = "Opportunity";
sourceDefinition.MeasureField = "Opportunity.Amount";
sourceDefinition.DateField = "Opportunity.CloseDate";
sourceDefinition.UserField = "Opportunity.OwnerId";
sourceDefinition.CategoryField = "Opportunity.ForecastCategoryName";
String sourceDefinitionId = insert(sourceDefinition);

ForecastingTypeSource typeSource = new sforce.SObject("ForecastingTypeSource");
typeSource.MasterLabel = "Custom Amount Type Source";
typeSource.DeveloperName = "Custom_Amount_Type_Source";
typeSource.ForecastingTypeId = typeId;
typeSource.ForecastingSourceDefinitionId = sourceDefinitionId;
```

```
typeSource.SourceGroup = 1;  
insert(typeSource);
```

ForecastingSrcRecJudgment

Represents forecast managers' judgment of whether they consider an opportunity-related deal to be certain to close. This object is available in API version 59.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The currency code of the judgment. If omitted, the default is USD.
JudgmentOwnerId	Type reference Properties Create, Filter, Group, Sort Description The ID of the forecast manager. This field is a relationship field. Relationship Name JudgmentOwner Relationship Type Lookup Refers To User
JudgmentValue	Type picklist Properties Create, Filter, Group, Sort, Update

Field	Details
	Description Whether the deal is likely to close (IN) or not (OUT).
ReferenceObjectId	Type reference Properties Create, Filter, Group, Sort Description The ID of the opportunity-related object. This field is a polymorphic relationship field. Relationship Name ReferenceObject Relationship Type Lookup Refers To Opportunity
Territory2Id	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the territory that the judgment is on. This field is a polymorphic relationship field. Relationship Name ReferenceObject Relationship Type Lookup Refers To Territory2

ForecastingSubmission

Represents a submitted forecast. This object is available in API version 62.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Available for forecast types that aren't grouped by product family forecast.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The currency code of the forecast submission. If omitted, the default is USD.
ForecastOwnerId	Type reference Properties Filter, Group, Sort Description The ID of the forecast owner. This field is a relationship field. Relationship Name ForecastOwner Refers To User
ForecastingGroupItemId	Type reference Properties Filter, Group, Nillable, Sort Description Reserved for future use. Forecast submissions aren't supported in forecast types with groups. Relationship Name ForecastingGroupItem Refers To ForecastingGroupItem
ForecastingTypeId	Type reference Properties Filter, Group, Sort

Field	Details
	Description The ID of the forecast type. This field is a relationship field. Relationship Name ForecastingType Refers To ForecastingType
IsLatest	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates if the forecast submission is the most recent submission. The default value is <code>false</code>.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description For internal use only. ID of this record.
Note	Type textarea Properties Filter, Nillable, Sort Description The note attached to the submitted forecast.
PeriodId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the period to which the submission applies. This field is a relationship field. Relationship Name Period Refers To Period

Field	Details
PeriodStartDate	Type date Properties Filter, Group, Sort Description Indicates the start date of the forecast period.
ProductFamily	Type picklist Properties Filter, Group, Nillable, Sort Description Must be set to <code>none</code>. Forecast submissions aren't supported in forecast types grouped by product families.
SubmissionDateTime	Type dateTime Properties Filter, Sort Description The date and time that the forecast submission was made. Calculated internally.
Territory2Id	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the territory to forecast on. This field is a relationship field. Relationship Name Territory2 Refers To Territory2

Usage

ForecastingSubmission is a detail object that contains the submitted item category values. Each record represents the values for a single item category. ForecastingSubmission is always used as a detail object for the submission, and inserted only as part of a transaction that includes all detail objects.

ForecastingSubmissionItem

Represents the values for each forecast category in a submitted forecast. This object is available in API version 62.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
Amount	Type currency Properties Filter, Nillable, Sort Description For forecasting types that use Amount as the measure, the amount for the forecast category. Amounts must be provided in the corporate currency.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The currency code of the forecast submission. If omitted, the default is USD.
ForecastingItemCategory	Type picklist Properties Create, Filter, Group, Sort Description The category the forecast belongs to. For individual forecast category rollups, the possible values are: • PipelineOnly—Rollup from Pipeline opportunities only. • BestCaseOnly—Rollup from Best Case opportunities only. • MostLikelyOnly—Rollup from Most Likely opportunities only. • CommitOnly —Rollup from Commit opportunities only. For cumulative forecast rollups, the possible values are: • OpenPipeline—Rollup from Pipeline, Best Case, Most Likely, and Commit opportunities.

Field	Details
	• <code>BestCaseForecast</code> —Rollup from Best Case, Most Likely, Commit, and Closed opportunities. • <code>MostLikelyForecast</code>—Rollup from Most Likely, Commit, and Closed opportunities. • <code>CommitForecast</code> —Rollup from Commit and Closed opportunities. For either cumulative or individual forecast category rollups, the possible values are: • <code>ClosedOnly</code>—Rollup from Closed opportunities only.
ForecastingSubmissionId	Type reference Properties Filter, Group, Sort Description The ID of the forecast submission. This field is a relationship field. Relationship Name ForecastingSubmission Relationship Type Master-detail Refers To ForecastingSubmission (the master object)
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description For internal use only. The ID of this record.
Quantity	Type double Properties Filter, Nillable, Sort Description For forecasting types that use Quantity as the measure, the quantity for the forecast category. Quantities must be provided in the corporate currency.

ForecastingType

Used to identify the forecast type associated with `ForecastingAdjustment`, `ForecastingOwnerAdjustment`, `ForecastingQuota`, `ForecastingFact`, and `ForecastingItem` objects. Available in API version 30.0 and greater.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only standard users with the View All Forecasts or Allow Forecasting permission or delegated forecast manager status can access this object.

Fields

Field Name	Details
<code>CanDisplayQuotas</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether a forecast type can show quota information. The default value is <code>false</code>. Available in API version 38.0 and later.
<code>DateType</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The date type that forecast amounts are based on. These values are available for forecast types that were available before Summer '21. • <code>OpportunityCloseDate</code>: Base forecasts on opportunity close dates. • <code>ProductDate</code>: Base forecasts on opportunity product line item dates, if available. • <code>ScheduleDate</code>: Base forecasts on opportunity product schedule dates, if available. These values are available in API version 52.0 and later in Performance Edition and in Unlimited Edition with the Sales Cloud.

Field Name	Details
	• <code>OLIMeasureCloseDateOnly</code>: Base forecasts on opportunity close dates. • <code>ProductDateOnly</code>: Base forecasts on opportunity product line item dates, if available. • <code>ScheduleDateOnly</code>: Base forecasts on opportunity product schedule dates, if available. These values to create forecasts on custom date fields are available in API version 57.0 and later in Performance, Professional, Enterprise, and Unlimited Edition with the Sales Cloud. • <code>OLIMeasureOppCustomDateOnly</code>: Base forecasts on custom opportunity dates, if available. • <code>OpportunityCustomDate</code>: Base forecasts on custom opportunity dates. The custom date field used must be on the opportunity object and based on the date type.
<code>DeveloperName</code>	Type string Properties Create, Filter, Group, Sort, Update Description The name of the forecasting type. The <code>DeveloperName</code> is called name in the Metadata API and Forecasting Type in custom reports.
<code>ForecastingGroupID</code>	Type reference Properties Create, Filter, Group, Nillable, Sort Description Indicates whether the forecasting type has a group assignment, and if so, the name of the group. This field is a relationship field. Available in API version 60.0 and later. Relationship Name ForecastingGroup Relationship Type Lookup Refers To ForecastingGroup
<code>HasAdjustments</code>	Type boolean

Field Name	Details
	Properties Defaulted on create, Filter, Group, Sort Description Indicates whether forecast managers can adjust forecasts of their immediate subordinates and child territories. The default value is <code>false</code>. Available in API version 60.0 and later.
HasOwnerAdjustments	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether all forecast users can adjust their own forecasts, including the territory forecasts that they own. The default value is <code>false</code>. Available in API version 60.0 and later.
HasProductFamily	Type boolean Properties Create, Defaulted on create, Group Description Indicates whether a forecasts view includes product families. The default value is <code>false</code>. Available in API version 40.0 and later.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the forecasting type is enabled. The default value is <code>false</code>.
IsAmount	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether the forecasting type is based on the revenue measure. The default value is <code>false</code>.
IsPlatformType	Type boolean

Field Name	Details
	Properties Defaulted on create, Filter, Group, Sort Description Indicates a legacy forecast type that wasn't available before Summer '21. The default value is <code>false</code>. Available in API version 52.0 and later.
IsQuantity	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether the forecasting type is based on the quantity measure. The default value is <code>false</code>.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the forecasting type.
LastActivatedDate	Type dateTime Properties Create, Filter, Nillable, Sort Description The date when a forecast type was activated. Read only. Available in API version 53.0 and later.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Controlling label for this forecasting type value. This display value is the internal label that doesn't get translated.
OpportunitySplitTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort

Field Name	Details
	Description Indicates whether the forecasting type has a split type, and if so, the name of the split type. This field is a relationship field. Available in API version 41.0 and later. Relationship Name OpportunitySplitType Relationship Type Lookup Refers To OpportunitySplitType
OpptyLineItemSplitTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort Description Indicates whether the forecasting type has a product split type, and if so, the name of the product split type. This field is a relationship field. Available in API version 58.0 and later. Relationship Name OpptyLineItemSplitType Relationship Type Lookup Refers To OpptyLineItemSplitType
RoleType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Indicates whether the role type has a forecasting type, and if so, which forecasting type. Available in API version 41.0 and later. Possible values are: • R—User role-based forecasting type • T—Territory1-based forecasting type; not used • Y—Territory2-based forecasting type
Territory2ModelId	Type reference Properties Create, Filter, Group, Nillable, Sort

Field Name	Details
	Description Indicates whether the forecasting type has a Territory2 model, and if so, the name of the Territory2 model. Available in API version 41.0 and later.

ForecastingTypeSource

Maps a forecasting source definition to a forecast type. This object is available in API version 52.0 and later.



Note: The information in this topic applies only to forecast types created in Summer '21 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The developer name of the forecasting type source.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
ForecastingSourceDefinitionId	Type reference Properties Create, Filter, Group, Sort Description ID of the forecasting source definition. This field is a relationship field. Relationship Name ForecastingSourceDefinition Relationship Type Lookup

Field	Details
	Refers To ForecastingSourceDefinition
ForecastingTypeId	Type reference Properties Create, Filter, Group, Sort Description ID of the forecast type. Can be linked only to forecast types created in Summer '21 and later. This field is a relationship field. Relationship Name ForecastingType Relationship Type Lookup Refers To ForecastingType
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Language of the forecasting type source.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Required. Controlling label for this forecasting type source.
ParentSourceDefinitionId	Type reference Properties Create, Filter, Group, Nillable, Sort Description For forecast types not based on the opportunity object and not based on a custom measure, this value represents the parent ForecastingSourceDefinition of the linked ForecastingSourceDefinition. This field is a relationship field. - Opportunity Product is the parent of Opportunity. - Opportunity Split is the parent of Opportunity.

Field	Details
	Line Item Schedule is the parent of Opportunity Product. Relationship Name ParentSourceDefinition Relationship Type Lookup Refers To ForecastingSourceDefinition
RelationField	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Represents the field linking the source objects of the parent ForecastingSourceDefinition to the child ForecastingSourceDefinition. Possible values are: - OpportunityLineItem.OpportunityId - OpportunityLineItem.Product2Id - OpportunityLineItemSchedule.OpportunityLineItemId - OpportunitySplit.OpportunityId
SourceGroup	Type int Properties Create, Filter, Group, Sort Description Required. Represents a grouping of forecasting source definitions.

Usage

Use this object to define a forecast type’s structure. This junction object links `ForecastingSourceDefinition` to `ForecastingType`.

For an example, see [ForecastingSourceDefinition](#).

ForecastingUserPreference

Represents the forecasting selections that a user has made, such as display options, date range, forecasting type, and currency.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only standard users with the View All Forecasts or Allow Forecasting permission or delegated forecast manager status can access this object.

Fields

Field Name	Details
ExternalId	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A unique system-generated numerical identifier for the user.
ForecastingDisplayedTypeId	Type reference Properties Create, Group, Sort, Update Description An identifier for the forecasting type that's displayed.
ForecastingPeriodDuration	Type int Properties Create, Group, Nillable, Sort, Update Description How long the forecasting period lasts.
ForecastingPeriodType	Type picklist Properties Create, Group, Nillable, Restricted picklist, Sort, Update Description The forecasting period's type. Valid values include: Month, Quarter, Week, or Year
ForecastingStartPeriod	Type int

Field Name	Details
	Properties Create, Group, Nillable, Sort, Update Description The date when the forecasting period begins.
ForecastingViewCurrency	Type string Properties Create, Group, Nillable, Sort, Update Description The currency shown on the forecasts page.
IsForecastingHideZeroRows	Type boolean Properties Create, Defaulted on create, Group, Sort, Update Description Whether the forecasts page shows zero-value rows.
IsForecastingShowQuantity	Type boolean Properties Create, Defaulted on create, Group, Sort, Update Description Whether the forecasts page shows forecast quantity.
IsHideForecastingGuidedTour	Type boolean Properties Create, Defaulted on create, Group, Sort, Update Description Whether the forecasts page shows the guided tour.
IsHideForecastingQuotaColumn	Type boolean Properties Create, Defaulted on create, Group, Sort, Update Description Whether the forecasts page shows a quota column.

Field Name	Details
IsShowForecastingChangeSignals	Type boolean Properties Create, Defaulted on create, Group, Sort, Update Description Whether the forecasts page shows changes in the last 7 days.
IsShowForecastingQuotaAttainment	Type boolean Properties Create, Defaulted on create, Group, Sort, Update Description Whether the forecasts page shows quota attainment information.

FormulaFunction

Represents a function used when building a formula, including examples and uses. This object is available in API version 47.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Fields

Field	Details
CategoryId	Type string Properties Filter, Group, Nillable, Sort Description The ID of the FormulaFunctionCategory. This is a relationship field. Relationship Name Category Relationship Type Lookup Refers To FormulaFunctionCategory

Field	Details
Description	Type string Properties Filter, Group, Nillable, Sort Description Description of the formula function.
DurableId	Type string Properties Filter, Group, Nillable, Sort Description Unique identifier for the field. Always retrieve this value before using it, as the value isn't guaranteed to stay the same from one release to the next. To simplify queries, use this field.
ExampleString	Type string Properties Filter, Group, Nillable, Sort Description Describes the function and what arguments you can use with it.
IsAllowedInEntityContext	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether you can use the formula function on an Entity (<code>true</code>) or not (<code>false</code>). For example, you cannot use the PRIORVALUE function in a custom Account formula field. The default value is <code>false</code>. This field is removed in API version 48.0 and later. Use the FormulaFunctionAllowedType on page 2813 object instead.
IsAllowedInFlowContext	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the formula function is allowed in a Flow (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>. This field is removed in API version 48.0 and later. Use the FormulaFunctionAllowedType on page 2813 object instead.

Field	Details
IsAllowedInVisualforceContext	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the formula function is allowed in Visualforce (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>. This field is removed in API version 48.0 and later. Use the FormulaFunctionAllowedType on page 2813 object instead.
Label	Type string Properties Filter, Group, Nillable, Sort Description The formula function label that appears in the user interface.
Name	Type string Properties Filter, Group, Nillable, Sort Description The name of the formula function.

Usage

Query `FormulaFunction` to search for available formula functions, such as `AND()`, `ISBLANK()`, `MAX()`, `MIN()`, and others.

FormulaFunctionAllowedType

Represents the functions that are supported in the given formula context. This object is available in API version 48.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Fields

Field	Details
DurableId	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description Unique identifier for the field. Always retrieve this value before using it, as the value isn't guaranteed to stay the same from one release to the next. To simplify queries, use this field.
FunctionId	Type string Properties Filter, Group, Nillable, Sort Description Unique identifier for the supported function. This is a relationship field. Relationship Name Function Relationship Type Lookup Refers To FormulaFunction
Type	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The name of the formula type in which the function is supported. Possible values are: • FLOW • VALIDATION • VISUALFORCE

FormulaFunctionCategory

Represents the category to which a formula belongs when building a formula. This object is available in API version 47.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Fields

Field	Details
DurableId	Type string Properties Filter, Group, Nillable, Sort Description Unique identifier for the field. Always retrieve this value before using it, as the value isn't guaranteed to stay the same from one release to the next. To simplify queries, use this field.
Label	Type string Properties Filter, Group, Nillable, Sort Description Label of the FormulaFunctionCategory that appears in the user interface.
Name	Type string Properties Filter, Group, Nillable, Sort Description Name of the FormulaFunctionCategory.

Usage

Query FormulaFunctionCategory to search for categories of available formula functions, such as `Math`, `Logical`, `Date` and `Time`, and others.

FrcstCustmCatgRampRateSrc

Represents the total contract value used for custom bulk adjustments. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
BaseValueFrcstSrcDefinitionId	Type reference Properties Create, Filter, Group, Sort, Update Description The DMO that contains the field in which the total contract value exists. This field is a relationship field. Relationship Name BaseValueFrcstSrcDefinition Refers To ForecastingSourceDefinition
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. The name: • must be 40 characters or fewer • must begin with a letter • can contain only underscores and alphanumeric characters • can't include spaces • can't end with an underscore • can't contain 2 consecutive underscores In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.
ForecastingCustomCategoryId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the forecasting custom category. This field is a relationship field. Relationship Name ForecastingCustomCategory

Field	Details
	Refers To ForecastingCustomCategory
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The combined language and locale ISO code, which controls the language of the FrcstCustmCatgRampRateSrc.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Label for this FrcstCustmCatgRampRateSrc value. This display value is the internal label that doesn't get translated.

FrcstCustmzAdjustment

Represents an individual forecast manager's adjustment of a subordinate's consumption forecast. Available in API version 63.0 and later. This object is different from the ForecastingAdjustment object, which represents managers' adjustments of subordinates' pipeline forecasts.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AdjustedAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description The revenue amount of an individual forecast item, after an adjustment.

Field	Details
AdjustedQuantity	Type double Properties Create, Filter, Nillable, Sort, Update Description The quantity amount of an individual forecast item, after an adjustment.
AdjustmentNote	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description A text note providing information about the adjustment. The maximum length is 255 characters. This field doesn't appear in reports.
ForecastingCustomCategoryId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the forecasting custom category. This field is a relationship field. Relationship Name ForecastingCustomCategory Refers To ForecastingCustomCategory
ForecastingTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the related forecasting type. This field is a relationship field. Relationship Name ForecastingType Refers To ForecastingType

Field	Details
IsAmount	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, then the adjustment is made in a revenue amount. If <code>false</code>, IsQuantity must be set to <code>true</code>. The default value is <code>false</code>.
IsQuantity	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, the adjustment is made in a quantity amount. If <code>false</code>, IsAmount must be set to <code>true</code>. The default value is <code>false</code>.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the forecast owner. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
PeriodId	Type reference Properties Create, Filter, Group, Nillable, Sort Description Period ID for the adjustment. This field is a relationship field. Relationship Name Period Refers To Period

Field	Details
Territory2Id	Type reference Properties Reserved for future use. Description Reserved for future use.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[FrcstCustmzAdjustmentChangeEvent](#) on page 68

Change events are available for the object.

[FrcstCustmzAdjustmentFeed](#) on page 55

Feed tracking is available for the object.

[FrcstCustmzAdjustmentHistory](#) on page 63

History is available for tracked fields of the object.

[FrcstCustmzAdjustmentOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[FrcstCustmzAdjustmentShare](#) on page 67

Sharing is available for the object.

FrcstCustmzOwnerAdjustment

Represents an individual forecast user's adjustment of their own consumption forecast. Available in API version 63.0 and later. This object is different from the ForecastingOwnerAdjustment object, which represents users' adjustments of their pipeline forecasts.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AdjustedAmount	Type currency Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description The revenue amount of an individual forecast item, after an adjustment.
AdjustedQuantity	Type double Properties Create, Filter, Nillable, Sort, Update Description The quantity amount of an individual forecast item, after an adjustment.
AdjustmentNote	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description A text note providing information about the adjustment. The maximum length is 255 characters. This field doesn't appear in reports.
CustomDimension	Type string Properties Create, Filter, Group, Nillable, Sort Description The ID of the additional dimension of the forecasting adjustment. For example, account ID, use case ID. Any data imported from an external source must be exactly 15 characters.
ForecastingCustomCategoryId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the forecasting custom category. This field is a relationship field. Relationship Name ForecastingCustomCategory Refers To ForecastingCustomCategory

Field	Details
ForecastingTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the related forecasting type. This field is a relationship field. Relationship Name ForecastingType Refers To ForecastingType
IsAmount	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, then the adjustment is made in a revenue amount. If <code>false</code>, <code>IsQuantity</code> must be set to <code>true</code>. The default value is <code>false</code>.
IsQuantity	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, the adjustment is made in a quantity amount. If <code>false</code>, <code>IsAmount</code> must be set to <code>true</code>. The default value is <code>false</code>.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the forecast owner. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User

Field	Details
PeriodId	Type reference Properties Create, Filter, Group, Nillable, Sort Description Period ID for the adjustment. This field is a relationship field. Relationship Name Period Refers To Period
Territory2Id	Type reference Properties Reserved for future use. Description Reserved for future use.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[FrcstCustmzOwnerAdjustmentChangeEvent](#) on page 68

Change events are available for the object.

[FrcstCustmzOwnerAdjustmentFeed](#) on page 55

Feed tracking is available for the object.

[FrcstCustmzOwnerAdjustmentHistory](#) on page 63

History is available for tracked fields of the object.

[FrcstCustmzOwnerAdjustmentOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[FrcstCustmzOwnerAdjustmentShare](#) on page 67

Sharing is available for the object.

FulfillmentOrder

Represents a group of products, fees, and delivery charges on a single order that share the same fulfillment location, delivery method, and recipient. The FulfillmentOrderLineItems belonging to a FulfillmentOrder are associated with OrderItemSummary objects belonging to a single OrderSummary. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is only available in Salesforce Order Management orgs.

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the Account or Person Account associated with the FulfillmentOrder. It represents the shopper in the storefront. This field is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
ActiveDate	Type datetime Properties Filter, Group, Nillable, Sort Description Date when the FulfillmentOrder becomes active. This field is available in API version 61.0 and later.
BillToContactId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the Contact associated with the FulfillmentOrder. It represents the shopper in the storefront when not using person accounts.

Field	Details
	This field is available in API version 49.0 and later. This field is a relationship field. Relationship Name BillToContact Relationship Type Lookup Refers To Contact
ClosedDate	Type datetime Properties Filter, Group, Nillable, Sort Description Date the FulfillmentOrder closed. Automatically entered. This field is available in API version 61.0 and later.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. ISO code for the currency of the OrderSummary associated with the FulfillmentOrder. Possible values are: • DKK—Danish Krone • EUR—Euro • GBP—British Pound • USD—U.S. Dollar The default value is USD. This field is available in API version 49.0 and later.
DeliveryDate	Type datetime Properties Create, Filter, Nillable, Sort, Update Description The date and time when the FulfillmentOrder was delivered. This field is a relationship field.

Field	Details
DeliveryMethodId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the DeliveryMethod used for this FulfillmentOrder. This field is a relationship field. Relationship Name DeliveryMethod Relationship Type Lookup Refers To OrderDeliveryMethod
FulfilledFromLocationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the Location handling this FulfillmentOrder. This field is a relationship field. Relationship Name FulfilledFromLocation Relationship Type Lookup Refers To Location
FulfilledToAddress	Type address Properties Filter, Nillable Description Address of the recipient.
FulfilledToCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Recipient address city.

Field	Details
FulfilledToCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Recipient address country.
FulfilledToEmailAddress	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description Email address of the recipient.
FulfilledTo GeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Accuracy of the geocode for the recipient address. Possible values are: • Address • Block • City • County • ExtendedZip • NearAddress • Neighborhood • State • Street • Unknown • Zip
FulfilledToLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with FulfilledToLongitude to specify the precise geolocation of the recipient address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places.

Field	Details
FulfilledToLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with FulfilledToLatitude to specify the precise geolocation of the recipient address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places.
FulfilledToName	Type string Properties Create, Filter, Group, Sort, Update Description Name on the recipient address.
FulfilledToPhone	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description Phone number of the recipient.
FulfilledToPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Recipient address postal code.
FulfilledToState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Recipient address state.
FulfilledToStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description Recipient address street.
FulfillmentOrderNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description ID of the FulfillmentOrder.
GrandTotalAmount	Type currency Properties Filter, Nillable, Sort Description Total, including adjustments and tax, of the products, fees, and delivery charges on the FulfillmentOrder. This amount includes all FulfillmentOrderLineItems associated with the FulfillmentOrder. This amount is equal to TotalAmount + TotalTaxAmount.
InvoiceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the Invoice associated with the FulfillmentOrder. This field is a relationship field. Relationship Name Invoice Relationship Type Lookup Refers To Invoice
IsReship	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the FulfillmentOrder is for a reshipment. The default value is false. This field is available in API version 53.0 and later.

Field	Details
IsSuspended	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the FulfillmentOrder is suspended. The default value is false.
ItemCount	Type double Properties Filter, Nillable, Sort Description Sum of the quantities of the FulfillmentOrderLineItems included in the FulfillmentOrder.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp for when the current user last viewed this record. A null value can mean that this record has only been referenced (LastReferencedDate) and not viewed.
OrderId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the original Order that generated the FulfillmentOrder. This field is a relationship field. Relationship Name Order Relationship Type Lookup

Field	Details
	Refers To Order
OrderSummaryId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the OrderSummary associated with the FulfillmentOrder. This field is a relationship field. Relationship Name OrderSummary Relationship Type Lookup Refers To OrderSummary
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the User who currently owns this FulfillmentOrder. Default value is the User logged in to the API to perform the create. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ProcessingTimeInMinutes	Type long Properties Create, Filter, Nillable, Sort, Update Description How many minutes it took to process the FulfillmentOrder, from the start of processing to completion.

Field	Details
StartFulfillmentDate	Type datetime Properties Create, Filter, Nillable, Sort, Update Description The date and time when the fulfillment process was started for the FulfillmentOrder.
Status	Type picklist Properties Create, Filter, Group, Sort, Update Description Status of the FulfillmentOrder. Each status corresponds to one status category, shown here in parentheses. You can customize the status picklist to represent your business processes, but the status category picklist is fixed because processing is based on those values. If you customize the status picklist, include at least one status value for each status category. Default values are: • Allocated (Activated) • Assigned (Fulfilling) • Cancelled (Cancelled) • Draft (Draft) • Fulfilled (Closed) • Pick Complete (Fulfilling) This value is available in API v56.0 and later. • Pickpack (Fulfilling) • Printed (Fulfilling) This value is available in API v56.0 and later. • Rejected (Rejected) This value is available in API v56.0 and later.
StatusCategory	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Status category of the FulfillmentOrder. Processing of the FulfillmentOrder depends on this value. Each status category corresponds to one or more statuses. Possible values are: • ACTIVATED—Activated • CANCELLED—Cancelled • CLOSED—Closed • DRAFT—Draft • FULFILLING—Fulfilling

Field	Details
	REJECTED—Rejected This value is available in API v56.0 and later.
TaxLocaleType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The system used to handle tax on the original Order associated with the FulfillmentOrder. Gross usually applies to taxes like value-added tax (VAT), and Net usually applies to taxes like sales tax. Possible values are: - Gross (displays most prices and taxes as combined values) - Net (displays most prices and taxes as separate values) This field is available in API version 49.0 and later.
TotalAdjustmentAmount	Type currency Properties Filter, Nillable, Sort Description Total amount of the price adjustments applied to the products on the FulfillmentOrder. This value only includes adjustments to FulfillmentOrderLineItems of type code Product, not adjustments to delivery charges or fees.
TotalAdjustmentAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Total amount of the price adjustments applied to the products on the Fulfillment Order, inclusive of tax. This value only includes adjustments to FulfillmentOrderLineItems of type code Product. This amount is equal to TotalAdjustmentAmount + TotalAdjustmentTaxAmount. This field is available in API version 49.0 and later.
TotalAdjustmentTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalAdjustmentAmount.

Field	Details
TotalAmount	Type currency Properties Filter, Nillable, Sort Description Adjusted total, not including tax, of the FulfillmentOrderLineItems, including products, fees, and delivery charges, on the Fulfillment Order.
TotalDeliveryAdjustAmount	Type currency Properties Filter, Nillable, Sort Description Total amount of the price adjustments applied to the delivery charges on the Fulfillment Order. This value only includes adjustments to FulfillmentOrderLineItems of type Delivery Charge.
TotalDeliveryAdjustAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Total amount of the price adjustments applied to the delivery charges on the Fulfillment Order, inclusive of tax. This value only includes adjustments to FulfillmentOrderLineItems of type Delivery Charge. This amount is equal to TotalDeliveryAdjustAmount + TotalDeliveryAdjustTaxAmount. This field is available in API version 49.0 and later.
TotalDeliveryAdjustTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalDeliveryAdjustAmount.
TotalDeliveryAmount	Type currency Properties Filter, Nillable, Sort Description Total of the delivery charges on the FulfillmentOrder. This value only includes FulfillmentOrderLineItems of type Delivery Charge.

Field	Details
TotalDeliveryAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Total amount of the delivery charges on the FulfillmentOrder, inclusive of tax. This value only includes FulfillmentOrderLineItems of type Delivery Charge. This amount is equal to TotalDeliveryAmount + TotalDeliveryTaxAmount. This field is available in API version 49.0 and later.
TotalDeliveryTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalDeliveryAmount.
TotalFeeAdjustAmount	Type currency Properties Filter, Nillable, Sort Description Total amount of the price adjustments applied to the fees on the FulfillmentOrder. This value only includes adjustments to FulfillmentOrderLineItems of type Fee. This field is available in API version 56.0 and later.
TotalFeeAdjustAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Total amount of the price adjustments applied to the fees on the FulfillmentOrder, inclusive of tax. This value only includes adjustments to FulfillmentOrderLineItems of type Fee. This amount is equal to TotalFeeAdjustAmount + TotalFeeAdjustTaxAmount. This field is available in API version 56.0 and later.
TotalFeeAdjustTaxAmount	Type currency Properties Filter, Nillable, Sort

Field	Details
	Description Tax on the TotalFeeAdjustAmount. This field is available in API version 56.0 and later.
TotalFeeAmount	Type currency Properties Filter, Nillable, Sort Description Total amount of the fees on the FulfillmentOrder, excluding adjustments and tax. This value only includes FulfillmentOrderLineItems of type Fee. This field is available in API version 56.0 and later.
TotalFeeAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Total price of the fees on the FulfillmentOrder, inclusive of tax. This value only includes FulfillmentOrderLineItems of type Fee. This amount is equal to TotalFeeAmount + TotalFeeTaxAmount. This field is available in API version 56.0 and later.
TotalFeeTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalFeeAmount. This field is available in API version 56.0 and later.
TotalProductAmount	Type currency Properties Filter, Nillable, Sort Description Total price of the products on the FulfillmentOrder, excluding order adjustments, delivery charges, and fees. This value only includes FulfillmentOrderLineItems of type code Product.
TotalProductAmtWithTax	Type currency

Field	Details
	Properties Filter, Nillable, Sort Description Total price of the products on the FulfillmentOrder, inclusive of tax. This value only includes FulfillmentOrderLineItems of type code Product. This amount is equal to TotalProductAmount + TotalProductTaxAmount. This field is available in API version 49.0 and later.
TotalProductTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalProductAmount.
TotalTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalAmount.
Type	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Type of the FulfillmentOrder. Each type corresponds to one type category, shown here in parentheses. You can customize the type picklist to represent your business processes, but the type category picklist is fixed because processing is based on those values. If you customize the type picklist, include at least one type value for each type category. Default values are: • Download (Digital) • Email (Digital) • In Store Pickup (Physical) • Retail Store (Physical) • Supplier (Drop Ship) • Warehouse (Physical)
TypeCategory	Type picklist

Field	Details
	Properties Filter, Group, Nillable, Restricted picklist, Sort Description Type category of the FulfillmentOrder. Processing of the FulfillmentOrder depends on this value. Each type category corresponds to one or more types. Possible values are: • DIGITAL—Digital • DROPSHIP—Drop Ship • PHYSICAL—Physical

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

FulfillmentOrderChangeEvent (API version 62.0)

Change events are available for the object.

FulfillmentOrderFeed

Feed tracking is available for the object.

FulfillmentOrderOwnerSharingRule

Sharing rules are available for the object.

FulfillmentOrderShare

Sharing is available for the object.

SEE ALSO:

- [FulfillmentOrderLineItem](#)
- [Order](#)
- [OrderSummary](#)

FulfillmentOrderItemAdjustment

Represents a price adjustment on a FulfillmentOrderLineItem. Corresponds to an OrderItemAdjustmentLineSummary associated with the corresponding OrderItemSummary. This object is available in API version 48.0 and later.

This object is used for calculations and doesn't have a default record page.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

This object is only available in Salesforce Order Management orgs.

Fields

Field	Details
Amount	Type currency Properties Create, Filter, Sort Description Amount, not including tax, of the adjustment.
CampaignName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Campaign associated with the adjustment.
CouponName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Coupon associated with the adjustment.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description ISO code for the currency of the FulfillmentOrderLineItem to which the adjustment applies. The default value is USD. Possible values are: • DKK—Danish Krone • EUR—Euro • GBP—British Pound • USD—U.S. Dollar This field is available in API version 49.0 and later.

Field	Details
Description	Type textarea Properties Create, Nillable, Update Description Text description of the adjustment.
FulfillmentOrderId	Type reference Properties Create, Filter, Group, Sort Description ID of the FulfillmentOrder associated with the FulfillmentOrderLineItem to which the adjustment applies.
FulfillmentOrderItemAdjustmentNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description ID of the FulfillmentOrderLineItemAdjustment.
FulfillmentOrderLineItemId	Type reference Properties Create, Filter, Group, Sort Description ID of the FulfillmentOrderLineItem to which this adjustment applies.
OrderItemAdjustLineSummaryId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the OrderItemAdjustmentLineSummary associated with the adjustment.
PromotionName	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description Promotion associated with the adjustment.
TotalAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Total amount of the adjustment, inclusive of tax. This amount is equal to Amount + TotalTaxAmount. This field is available in API version 49.0 and later.
TotalTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the Amount.

SEE ALSO:

- [FulfillmentOrder](#)
- [FulfillmentOrderItemTax](#)
- [FulfillmentOrderLineItem](#)
- [OrderItemAdjustmentLineSummary](#)

FulfillmentOrderItemTax

Represents the tax on a FulfillmentOrderLineItem or FulfillmentOrderItemAdjustment. Corresponds to an OrderItemTaxLineItemSummary. This object is available in API version 48.0 and later.

This object is used for calculations and doesn't have a default record page.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

This object is only available in Salesforce Order Management orgs.

Fields

Field	Details
Amount	Type currency Properties Create, Filter, Sort Description Amount of tax represented by the FulfillmentOrderItemTax.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description ISO code for the currency of the FulfillmentOrderLineItem to which the tax applies. The default value is USD. Possible values are: • DKK—Danish Krone • EUR—Euro • GBP—British Pound • USD—U.S. Dollar This field is available in API version 49.0 and later.
Description	Type textarea Properties Create, Nillable, Update Description Description of the FulfillmentOrderItemTax.
FulfillmentOrderId	Type reference Properties Create, Filter, Group, Sort Description ID of the associated FulfillmentOrder.
FulfillmentOrderItemAdjustId	Type reference Properties Create, Filter, Group, Nillable, Sort

Field	Details
	Description If this object represents tax on an adjustment, this value is the ID of the FulfillmentOrderItemAdjustment to which the tax applies. If this value is null, the adjustment applies to a FulfillmentOrderLineItem.
FulfillmentOrderItemTaxNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description ID of the FulfillmentOrderItemTax.
FulfillmentOrderLineItemId	Type reference Properties Create, Filter, Group, Sort Description If this object represents tax on a FulfillmentOrderLineItem, this value is the ID of that FulfillmentOrderLineItem. If this object represents tax on an adjustment, this value is the ID of the FulfillmentOrderLineItem to which the adjustment applies.
OrderItemTaxLineItemSummaryId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the OrderItemTaxLineItemSummary associated with the OrderItemSummary that corresponds to the FulfillmentOrderLineItem to which the tax applies.
Rate	Type percent Properties Create, Filter, Nillable, Sort, Update Description Tax rate used to calculate the Amount.
TaxEffectiveDate	Type date Properties Create, Filter, Group, Sort, Update Description Date on which the Amount was calculated. Important due to tax rate changes over time.

Field	Details
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Indicates whether the Amount is actual or estimated. Possible values are: • Actual • Estimated

FulfillmentOrderItemTaxChangeEvent (API version 62.0)

Change events are available for the object.

SEE ALSO:

[FulfillmentOrder](#)

[FulfillmentOrderItemAdjustment](#)

[FulfillmentOrderLineItem](#)

[OrderItemTaxLineItemSummary](#)

FulfillmentOrderLineItem

Represents a product or delivery charge belonging to a FulfillmentOrder. Corresponds to an OrderItemSummary. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

This object is only available in Salesforce Order Management orgs.

Fields

Field	Details
CurrencyIsoCode	Type picklist

Field	Details
	Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Available only for orgs with the multicurrency feature enabled. ISO code for the currency of the FulfillmentOrder associated with the FulfillmentOrderLineItem. Possible values are: • DKK—Danish Krone • EUR—Euro • GBP—British Pound • USD—U.S. Dollar The default value is USD. This field is available in API version 49.0 and later.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the FulfillmentOrderLineItem.
EndDate	Type dateTime Properties Create, Filter, Nillable, Sort Description End date of the FulfillmentOrderLineItem.
FulfillmentOrderId	Type reference Properties Create, Filter, Group, Sort Description ID of the FulfillmentOrder associated with the FulfillmentOrderLineItem. This field is a relationship field. Relationship Name FulfillmentOrder Relationship Type Lookup Refers To FulfillmentOrder

Field	Details
FulfillmentOrderLineItemNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description ID of the FulfillmentOrderLineItem.
GrossUnitPrice	Type currency Properties Create, Filter, Nillable, Sort Description Unit price, including tax, of the FulfillmentOrderLineItem. This value is equal to TotalPrice + TotalTaxAmount. This field is available in API version 49.0 and later.
IsReship	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the FulfillmentOrderLineItem belongs to a reshipment. The default value is false. This field is available in API version 53.0 and later.
MainFulfillmentOrderLineItemId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the original FulfillmentOrderLineItem. This field is a relationship field. This field is available in API version 63.0 and later. Relationship Name FulfillmentOrderLineItem Relationship Type Lookup Refers To FulfillmentOrderLineItem

Field	Details
OrderItemId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the original OrderItem for the OrderItemSummary associated with the FulfillmentOrderLineItem. This field is a relationship field. Relationship Name OrderItem Relationship Type Lookup Refers To OrderItem
OrderItemSummaryId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the OrderItemSummary associated with the FulfillmentOrderLineItem. This field is a relationship field. Relationship Name OrderItemSummary Relationship Type Lookup Refers To OrderItemSummary
OriginalQuantity	Type double Properties Create, Filter, Sort Description Original quantity of the FulfillmentOrderLineItem.
Product2Id	Type reference Properties Create, Filter, Group, Nillable, Sort

Field	Details
	Description ID of the product represented by the FulfillmentOrderLineItem. This field is a relationship field. Relationship Name Product2 Relationship Type Lookup Refers To Product2
Quantity	Type double Properties Create, Filter, Sort, Update Description Current quantity of the FulfillmentOrderLineItem. Equal to the original quantity minus any canceled quantity.
QuantityUnitOfMeasure	Type string Properties Create, Filter, Group, Nillable, Sort Description Unit of measure of the quantity, for example: unit, gallon, ton, or case.
RejectedQuantity	Type double Properties Create, Filter, Nillable, Sort, Update Description Used by the Distributed Order Management package and Store Fulfillment app to store the quantity that has been rejected by a fulfillment location. This field is available in API version 57.0 and later.
RejectReason	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description If the FulfillmentOrderLineItem was rejected by a fulfillment location, the reason for the rejection.

Field	Details
	Default values are: • Damaged • Just Sold • Other • Out of Packing Supplies • Out of Stock This field is available in API version 56.0 and later.
ReshipReason	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description If the FulfillmentOrderLineItem belongs to a reshipment, the reason for the reshipment. Default values are: • Damaged • Lost • Unknown • Wrong Item This field is available in API version 53.0 and later.
ServiceDate	Type dateTime Properties Create, Filter, Nillable, Sort Description Service or start date of the FulfillmentOrderLineItem.
ScopeIdentifierText	Type string Properties Create, Filter, Group, Nillable, Sort Description Unique identifier used to identify the scope in which this fulfillment order line item record is created.
TotalAdjustmentAmount	Type currency Properties Filter, Nillable, Sort

Field	Details
	Description Total of any price adjustments applied to the FulfillmentOrderLineItem.
TotalAdjustmentAmountWithTax	Type currency Properties Filter, Nillable, Sort Description Total amount of the price adjustments applied to the FulfillmentOrderLineItem, inclusive of tax. This amount is equal to TotalAdjustmentAmount + TotalAdjustmentTaxAmount. This field is available in API version 49.0 and later.
TotalAdjustmentTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalAdjustmentAmount.
TotalAmount	Type currency Properties Filter, Nillable, Sort Description Total, including adjustments and tax, of the FulfillmentOrderLineItem.
TotalLineAmount	Type currency Properties Create, Defaulted on create, Filter, Nillable, Sort Description Total, not including adjustments or tax, of the FulfillmentOrderLineItem.
TotalLineAmountWithTax	Type currency Properties Filter, Nillable, Sort Description Total price of the FulfillmentOrderLineItem, inclusive of tax. This amount is equal to TotalLineAmount + TotalLineTaxAmount. This field is available in API version 49.0 and later.

Field	Details
TotalLineTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalLineAmount.
TotalPrice	Type currency Properties Filter, Nillable, Sort Description Total, including adjustments but not tax, of the FulfillmentOrderLineItem. Equal to UnitPrice times Quantity.
TotalTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalPrice.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Type of the FulfillmentOrderLineItem. Matches the type of the associated OrderItemSummary. Delivery Charge indicates that the FulfillmentOrderLineItem represents a delivery charge. Fee indicates that it represents another type of fee, such as a return fee. Order Product indicates that it represents any other type of product, service, or charge. Each type corresponds to one type code, shown here in parentheses. Possible values are: • <code>Delivery Charge</code> (Charge) • <code>Fee</code> (Charge) This value is available in API v56.0 and later. • <code>Order Product</code> (Product)
TypeCode	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort

Field	Details
	Description Type code of the FulfillmentOrderLineItem. Matches the type code of the associated OrderItemSummary. Processing depends on this value. Charge indicates that the FulfillmentOrderLineItem represents a charge or fee. Product indicates that it represents any other type of product, service, or charge. A type code can be associated with one or more types. Possible values are: • Charge • Product
UnitPrice	Type currency Properties Create, Defaulted on create, Filter, Nillable, Sort Description Unit price of the FulfillmentOrderLineItem.

FulfillmentOrderChangeEvent

Change events are available for the object.

SEE ALSO:

[FulfillmentOrder](#)

[FulfillmentOrderItemAdjustment](#)

[FulfillmentOrderItemTax](#)

[OrderItemSummary](#)

FunctionConnection

Represents a connection between an org and Salesforce Functions. This object is available in API version 52.0 and later.

In API version 53.0, the name of this object was changed from SffunctionsConnection to FunctionConnection.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Error	Type string Properties Filter, Group, Nillable, Sort Description The error string, if any, for the connection between the org and Salesforce Functions.
FunctionsAccountLoginOrg	Type string Properties Filter, Group, Nillable, Sort Description The Salesforce Functions account login org.
FunctionsAccountName	Type string Properties Filter, Group, Nillable, Sort Description The Salesforce Functions account name.
FunctionsAccountUuid	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The unique Salesforce Functions account UUID. This is a generated ID that is not in Salesforce object ID format.
Sequence	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description Sequence number for the record.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description The status of the connection between the org and Salesforce Functions. Possible values are: • <code>Attempted</code> • <code>None</code> • <code>TrustedBiDirection</code> • <code>TrustedUniDirection</code> The default value is 'None'. <code>TrustedBiDirection</code> indicates the connection is fully established.

Usage

FunctionConnection is not intended for direct use and should be treated as a read-only object that represents the current connection information between your org and Salesforce Functions. To create and manage connections between your org and Salesforce Functions use the steps and commands described in the [Salesforce Functions developer documentation](#).

FunctionConnection is not supported in Trialforce templates or org snapshots.

FunctionInvocationRequest

Represents invocation information for a Salesforce Function. This object is available in API version 51.0 and later.

When a Salesforce Function is invoked using the Apex `functions.Function` invoke methods, a FunctionInvocationRequest record is created that contains information on the status and results of the invocation.

Supported Calls

`delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `undelete()`, `update()`

Fields

Field	Details
CallbackStatus	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The status of the callback for asynchronous invocations. This field is new in API version 52.0. Possible values are: • <code>Completed</code> - Not used for the Salesforce Functions beta.

Field	Details
	• Enqueued - The Function has completed (either successfully or unsuccessfully), and the callback has been enqueued for asynchronous execution in the Salesforce org. • Failed - Not used for the Salesforce Functions beta. • PendingResponse - The Function has not yet completed, so the callback has not been called yet. The default value is 'PendingResponse'.
ExecutionTime	Type long Properties Filter, Group, Nillable, Sort, Update Description The execution time of the Function in milliseconds.
ExtendedResponse	Type textarea Properties Nillable, Update Description JSON object with additional information about the result of the Function execution.
FunctionName	Type string Properties Filter, Group, idLookup, Sort Description Name of the Function that was invoked. This name is case-sensitive and uses the format "project name-function name"
InvokingNamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description Prefix of the namespace that invokes the function. A namespace can invoke the global function using an installed package via Apex.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The namespace prefix that is associated with this object. This object is available in API version 53.0 and later. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. - In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. - In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
OwnerId	Type reference Properties Filter, Group, Sort, Update Description The owner of the FunctionInvocationRequest. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ResponseBody	Type base64 Properties Nillable, Update Description Response body of the invoked Function.
ResponseContentType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description Content type of the response body of the invoked Function. For example, the content type could be <code>application/json</code>, <code>text/csv</code>, or various other values depending on what the Function returned.
ResponseLength	Type int Properties Filter, Group, Nillable, Sort Description Length of the response body.
ResponseName	Type string Properties Filter, Group, Nillable, Sort, Update Description Name of response, not currently used.
ResponseUncompressedLength	Type int Properties Filter, Group, Nillable, Sort, Update Description Uncompressed length of the Function response, if the response content was compressed.
StackTrace	Type textarea Properties Nillable, Update Description If there was an error invoking the function, this field contains the Function stack trace.
Status	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Status of the invoked Function. Functions that are invoked asynchronously can be in a queued <code>InProgress</code> state before they are invoked. Possible values are:

Field	Details
	• <code>Dispatched</code> - Not used for the Salesforce Functions beta. • <code>Error</code> - The Function failed to execute due to either an error starting the Function, or an error while the Function was running. • <code>FunctionInProgress</code> - The Function invocation has been sent to the Salesforce Functions compute environment, and is running. • <code>InProgress</code> - The Function invocation request has been enqueued. • <code>New</code> - The Function invocation request has been created, but not enqueued yet. • <code>Success</code> - The Function has completed execution. For status on whether the callback has been called, see the <code>CallbackStatus</code> field. The default value is 'New'.

Usage

Treat `FunctionInvocationRequest` records as read-only records used to get information about a specific Function invocation. To invoke Functions, use the Apex `functions.Function` class invoke methods.

`FunctionInvocationRequest` is not supported in Trialforce templates or org snapshots.

FunctionReference

Represents a deployed Salesforce Function associated with an org. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
<code>Access</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The label for whether managed components can access across namespaces. Possible values are: • <code>Global</code>—The managed components can access across namespaces. • <code>Public</code>—The managed components can access within the same namespace. The default value is <code>Public</code>.

Field	Details
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the Function.
FunctionName	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The developer name of the Function. This name is case sensitive and uses the format "project name-function name". This field is unique within your organization.
ImageReference	Type reference Properties Filter, Group, Nillable, Sort Description Stores details about an image associated with a function. This is internal only, used by packaging only, and should not be editable or set by the customer.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language code for the Function, such as "en_US".
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The master label for the Function.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The namespace prefix that is associated with this object. This object is available in API version 53.0 and later. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. - In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. - In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.

Usage

Treat `FunctionReference` records as read-only records used to get information about a specific Function associated with your org. To invoke Functions, use the Apex `functions.Function` class invoke methods. To deploy and associate Functions with your org, use Salesforce CLI commands associated with Functions, as described in the [Salesforce Functions developer documentation](#).

`FunctionReference` is not supported in Salesforce templates or org snapshots.

GenAIConversationSummary

Represents a generated summary of a voice or video call. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access this object, Einstein Conversation Insights and Einstein for Sales must be enabled in your org.

Fields

Field	Details
<code>ConversationRecordId</code>	Type reference

Field	Details
	Properties Create, Filter, Group, Sort Description The unique ID of the related voice or video call record. This field is a polymorphic relationship field. Relationship Name ConversationRecord Relationship Type Master-detail Refers To VideoCall, VoiceCall (the master object)
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for organizations with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization. Possible values are: • MXN—Mexican Peso • USD—U.S. Dollar The default value is USD.
ErrorMessage	Type string Properties Filter, Group, Nillable, Sort Description An error message when there is a problem with sharing the conversation summary.
Source	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Whether the summary shown is content generated by Einstein or subsequently edited by a user. Possible values are: • EINSTEIN_GPT—Einstein

Field	Details
	USER_EDITED—User Edited
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort, Update Description The status of the summary. Possible values are: - ERROR—Error - GENERATING—Generating - SUCCESS—Success
Summary	Type textarea Properties Create, Nillable, Update Description The summary text content.

Associated Objects

This object has the following associated objects. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

GenAIConversationSummaryChangeEvent on page 68

Change events are available for the object.

GenAIConversationSummaryFeed on page 55

Feed tracking is available for the object.

GenAIConversationSummaryHistory on page 63

History is available for tracked fields of the object.

GenAIConversationSummaryOwnerSharingRule on page 65

Sharing rules are available for the object.

GenAIConversationSummaryShare on page 67

Sharing is available for the object.

GenAiFunctionDefinition

Represents an agent action. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, Agents must be enabled in your org.

Fields

Field	Details
Description	Type textarea Properties Create, Update Description A description explaining the general purpose and domain of the action.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name for this object.
InvocationTarget	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Target invocation used by invocation operations.
InvocationTargetType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Invocable action types used by invocation operations. Possible values are: - apex - flow - generatePromptResponse

Field	Details
IsConfirmationRequired	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether confirmation is required for this action. The default value is <code>false</code>.
IsLocal	Type boolean Properties Defaulted on create, Filter, Group, Sort Description This field is a calculated field and is set to <code>true</code> if this action is an edited version of a standard action. The default value is <code>false</code>.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the GenAiFunctionDefinition. The value for this field is the language value of the org.
LocalDeveloperName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The unique name for this action within a topic.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The master label for the generative AI action.
NamespacePrefix	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The namespace of the GenAiFunctionDefinition.
ParentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the object that owns the action. This field is a relationship field. Relationship Name Parent Refers To GenAiPlannerFunctionDef
PlannerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The agent planner service for this action. This field is a relationship field. Relationship Name Planner Refers To GenAiPlannerDefinition
PluginId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The agent topic for this agent action. This field is a relationship field. Relationship Name Plugin Refers To GenAiPluginDefinition

Field	Details
Source	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The optional source standard or custom action from which this action's configuration, including description, input, and output, is copied. If there's no value, the action is used only within the parent topic.

GenAiPlannerDefinition

Represents an agent planner service that uses a large language model (LLM) and a reasoning strategy to decompose a given task into smaller subtasks, identify the most suitable actions for each subtask, and invoke them. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, Agents must be enabled in your org.

Fields

Field	Details
Capabilities	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A set of tags associated with the agent planner service definition.
Description	Type textarea Properties Create, Filter, Group, Sort, Update Description A description explaining the general purpose and domain of the agent planner service definition.

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name for this object.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the GenAiPlannerDefinition. The value for this field is the language value of the org.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The master label of the agent planner service definition.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace of the GenAiPlannerDefinition.
PlannerType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A particular approach to problem solving that is given as prompt instructions to a large language model (LLM). Possible values are: • <code>AiCopilot__ReAct</code>—Uses a reactive planning strategy to solve problems with the LLM. This strategy consists of prompting the LLM to generate the next step in response to an event and the current context. It differs from a sequential planner in that it doesn't plan more than one step ahead of time.

Field	Details
	<code>AiCopilot__SequentialPlannerIntentClassifier</code>—Uses an intent classifier prompt and a sequential planner prompt. With each text input, the planner asks the LLM to generate a step-by-step plan to finish the goal. It plans first, then executes.

GenAiPlannerFunctionDef

Represents a relationship between the agent planner service and agent actions. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, Agents must be enabled in your org.

Fields

Field	Details
PlannerId	Type reference Properties Create, Filter, Group, Sort, Update Description This field is a relationship field. Relationship Name Planner Relationship Type Lookup Refers To GenAiPlannerDefinition
Plugin	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A set of actions that contextualize the agent planner service.

GenAiPluginDefinition

Represents an agent topic, which is a category of actions related to a particular job to be done by AI agents. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, Agents must be enabled in your org.

Fields

Field	Details
CanEscalate	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this topic is eligible for escalation to a rep. The default value is <code>false</code>.
Description	Type textarea Properties Create, Update Description The description of the topic.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description Represents the API name of the topic. Can contain only underscores and alphanumeric characters and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores.
IsLocal	Type boolean

Field	Details
	Properties Defaulted on create, Filter, Group, Sort Description This field is a calculated field and is set to <code>true</code> if this topic is an edited version of a standard topic. The default value is <code>false</code>.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the topic.
LocalDeveloperName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The unique name for this topic within an agent.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The master label for the topic.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of these values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This

Field	Details
	field's value is the namespace prefix of the Developer Edition org of the package developer. In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
ParentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the object that owns the topic. This field is a polymorphic relationship field. Relationship Name Parent Refers To GenAiPlannerDefinition, GenAiPlannerFunctionDef
PlannerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The agent planner service for this topic. This field is a relationship field. Relationship Name Planner Refers To GenAiPlannerDefinition
PluginType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort Description Possible values are: <code>APICustomTopic</code> <code>Topic</code>
Scope	Type textarea

Field	Details
	Properties Create, Nillable, Update Description A specific job description for a topic.
Source	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The optional source standard or custom topic from which this topic's configuration, including description, instructions, and utterances, is copied. If there's no value, the topic is used only within this agent version.

GenOpPlanRequest

Represents a request to generate a service plan. This object is available in API version 67.0 and later.

Each request is stored as record data. We support all delete operations at the record or bulk level. For example, you can [use Bulk API 2.0 to delete multiple records in Marketing Cloud Next](#).

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`

Special Access Rules

To access this object, you must have the Service Planner Access add-on license.

Fields

Field Name	Details
CopilotId	Type reference Properties Filter, Group, Sort, Nillable Description (Optional) The ID of the Einstein Copilot associated with the plan request. This field is a relationship field.

Field Name	Details
	Relationship Name Copilot
	Refers To GenAiPlannerDefinition
CopilotName	Type string
	Properties Filter, Group, Sort, Nillable
	Description (Optional) The name of the Einstein Copilot associated with the plan request.
ErrorCode	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description (Optional) The standard error code when plan generation fails. Possible values are: • AgentNotActive • AgentNotFound • CaseGroundingNotEnabled (Service AI Grounding isn't enabled) • InstructionsOrActionsNotFound • InsufficientData • InvalidRecordId • NoEligibilityDefined (No eligibility criteria defined) • NotEligible • RagConfigurationError • StepSummaryEmpty • TopicIdNotFound • TopicNotFound • Unknown
ErrorMessage	Type string
	Properties Filter, Group, Sort, Nillable
	Description (Optional) The error message when plan generation fails.

Field Name	Details
LlmModelName	Type string Properties Filter, Group, Sort, Nillable Description (Optional) The name of the large language model used for plan generation. The maximum length is 80 characters.
LlmProviderName	Type string Properties Filter, Group, Sort, Nillable Description (Optional) The name of the LLM provider. The maximum length is 80 characters.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description (Required) The auto-generated name of the generated operation plan request.
ParentId	Type reference Properties Filter, Group, Sort Description (Required) The ID of the service plan parent record. This field is a polymorphic relationship field. Relationship Name Parent Relationship Type Master-detail Refers To Case, Incident, MessagingSession, Opportunity (the master object)
PromptTemplateDevName	Type string Properties Filter, Group, Sort, Nillable

Field Name	Details
	Description (Optional) The developer name of the prompt template used for plan generation. The maximum length is 80 characters.
PromptTemplateVersionNo	Type int Properties Filter, Group, Sort, Nillable Description (Optional) The version number of the prompt template.
Reason	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description (Required) The reason why plan generation failed or returned no steps. Possible values are: • CannotGeneratePlan • NoEligibilityConfig (no eligibility criteria set) • None (default) • NoPlanGenerated PlanEmpty • PlanEmptyInsufficientData • RagConfigurationError • ThresholdError (eligibility not met for unknown reason) • ThresholdNotMet
RequestSource	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description (Optional) The source where the plan request originated. Possible values are: • CASE • EINSTEIN_LEX (Einstein Chat LEX component) • INCIDENT

Field Name	Details
RequestType	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description (Required) The type of service plan request. Possible values are: • Close • Generation • Summary (default)
Status	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description (Required) The status of the plan generation request. Possible values are: • Error • Incomplete • InProgress (default) • Success
Utterance	Type textarea Properties Nullable Description (Optional) The natural language input or prompt used for plan generation. The maximum length is 32,000 characters.

GeoCountry

Represents a country. This object is available in API version 56.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The GeoCountry object is available if B2B Commerce or D2C Commerce is enabled.

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of this record.
IsoCode	Type string Properties Create, Filter, Group, idLookup, Sort Description Two-letter ISO code of the country as defined in the org's State-Country picklist. This field is unique within your organization
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed data in this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible the user accessed data in this record or list view but didn't view it directly.

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The name of the country that corresponds with the ISO code.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the GeoCountry record. By default, the asset owner is the user who created the record. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Associated Objects

This object has the following associated objects. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

GeoCountryOwnerSharingRule on page 65

Sharing rules are available for the object.

GeoCountryShare on page 67

Sharing is available for the object.

SEE ALSO:

[GeoState](#)

[TaxGeoConfig](#)

GeolocationBasedAction

Represents a geolocation-based action, which is an action that’s triggered when a user enters, exits, or is within the area of the associated object. Available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
ActionData	Type textarea Properties Create, Nillable, Update Description The details of the selected action type.
ActionType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of action. Possible values are: - PlatformAlert - QuickAction - ViewRecord
Description	Type textarea Properties Create, Nillable, Update Description The description of the action.
InitialTimeInvoked	Type dateTime Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description Captures the first time the mobile worker invoked this action.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
LastTimeInvoked	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Captures the last time the mobile worker invoked this action.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, and LastReferenceDate isn't null, the user accessed this record or list view indirectly.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the action.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of this object. This field is a polymorphic relationship field.

Field	Details
	Relationship Name Owner Relationship Type Lookup Refers To Group, User
Radius	Type int Properties Create, Filter, Group, Sort, Update Description The distance in meters from the location of the associated object that triggers the action.
ReferenceRecordId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the record that the action is associated with. This field is a relationship field. Relationship Name ReferenceRecord Relationship Type Lookup Refers To ServiceAppointment
TriggerType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The event that triggered this action. Possible values are: - GeoFenceEnter—Enter - GeoFenceExit—Exit

GeoState

Represents a state. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The GeoState object is available if B2B Commerce or D2C Commerce is enabled.

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of this record.
GeoCountryId	Type reference Properties Create, Filter, Group, Sort Description ID of the GeoCountry associated with this GeoState. This field is a relationship field. Relationship Name GeoCountry Relationship Type Lookup Refers To GeoCountry
IsoCode	Type string Properties Create, Filter, Group, Sort

Field	Details
	Description Two-letter ISO code of the state as defined in the org's State-Country picklist. This field is unique within your organization
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed data in this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible the user accessed data in this record or list view but didn't view it directly.
Name	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The name of the state that corresponds with the ISO code.

SEE ALSO:

[GeoCountry](#)

GtwyProvPaymentMethodType

The gateway provider payment method type allows integrators and payment providers to choose an active payment to receive an order's payment data rather than allowing the Salesforce Order Management platform to select a default payment method. This object is available in API version 50.0 and later.

Supported Calls

```
create(), delete(), describeSObjects(), query(), retrieve(), search(), update(), upsert()
```

Fields


Field	Details
Comments	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Users can provide additional details about the gateway provider payment method type record. Supports a maximum of 1000 characters.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, Salesforce generates one for each record, which slows performance.
GtwyProviderPaymentMethodType	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Links the Salesforce payment method to the payment method used in the Salesforce Order Management storefront. Your payment gateway integration uses this field when finding a payment method to link to a payment. The value of <code>GtwyProviderPaymentMethodType</code> must match the payment method value sent to the order's Payment Instrument in Salesforce Order Management. Listed below are several examples of payment method values that Salesforce could receive from Salesforce Order Management. • <code>CREDIT_CARD</code> • <code>BASIC_CREDIT</code> • <code>CreditCard</code> • <code>GooglePay</code>

Field	Details
	ApplePay
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Language of the payment gateway integration.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
MasterLabel	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. The gateway provider payment method type name that appears in the user interface.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description Namespace of the payment gateway integration classes.
PaymentGatewayProviderId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Specifies the payment gateway provider that Salesforce Order Management should use when processing payments. One payment gateway provider can be related to multiple payment method types. This is a relationship field.

Field	Details
	Relationship Name PaymentGatewayProvider Relationship Type Lookup Refers To PaymentGatewayProvider
PaymentMethodType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the type of payment method used on an order in Salesforce Order Management. Possible values are: - AlternativePaymentMethod - CardPaymentMethod - DigitalWallet
RecordTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the record type entity related to the gateway provider payment method type. This is a relationship field. Relationship Name RecordType Relationship Type Lookup Refers To RecordType

Usage

The Salesforce Order Management payment record must have a `ProcessorId` field with the same value as the payment gateway's `ExternalReferenceId` field. The gateway provider payment method type record must have a `PaymentMethodType` field that looks up to the payment method that you want to associate to your payment. Finally, the payment gateway and gateway provider payment method type must have matching `PaymentGatewayProviderId` fields. When you've established these relationships, the payment record can infer your payment method from the gateway provider payment method type record.

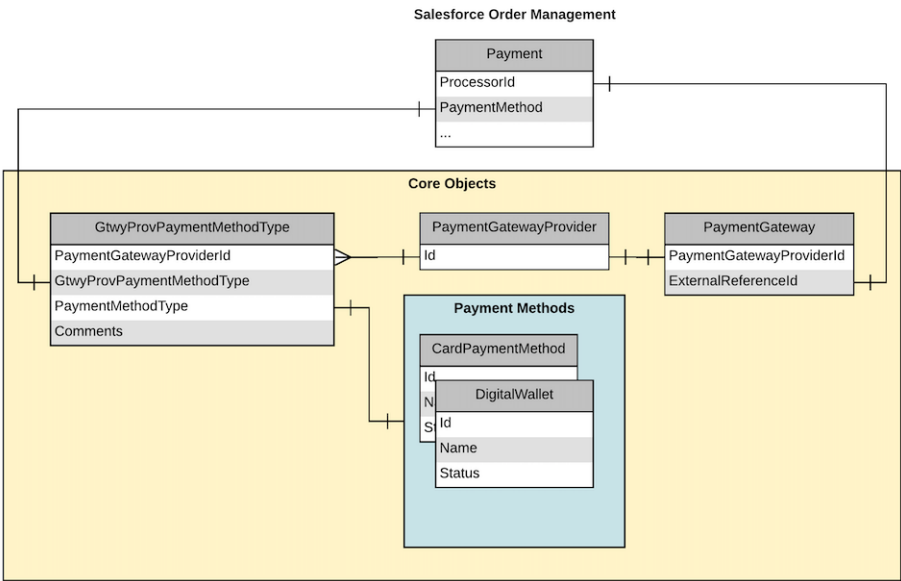

Goal

The Goal object represents the components of a goal such as its name, description, and status.

 **Note:** The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
CompletionDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The completion date of the goal.
Description	Type textarea

Field Name	Details
	Properties Create, Nillable, Update Description The description of the goal. The maximum length is 65,535 characters.
DueDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date the goal is due.
ImageUrl	Type url Properties Create, Filter, Group, Nillable, Sort, Update Description The URL for the goal image. The image must be stored in Documents and set as externally available. Applicable only to Goal objects of Type: Goal.
IsKeyCompanyGoal	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the goal is a key company goal.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp that indicates when a user last viewed a record that is related to this goal.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field Name	Details
	Description The timestamp that indicates when a user last viewed this goal. If this value is null, this record might have been only referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Create, Filter, Group, Sort, Update Description The name of the goal. The maximum length is 255 characters.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the user who owns the goal.
Progress	Type percent Properties Filter, Nillable, Sort Description The progress of the goal measured as a percentage.
StartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The start date of the goal.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The status of the goal. Possible values: • Draft

Field Name	Details
	• Published • Completed • Canceled • Not Completed

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

GoalFeed

Feed tracking is available for the object.

GoalHistory

History is available for tracked fields of the object.

GoalOwnerSharingRule

Sharing rules are available for the object.

The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

GoalShare

Sharing is available for the object.

GoalLink

Represents the relationship between two goals. This is a many-to-many relationship, meaning that each goal can link to many other goals.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description The auto-generated name of the goal link.

Field Name	Details
ParentGoalId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the parent goal.
SubgoalId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the subgoal.

GoogleDoc

Represents a link to a Google Document. This object is available in API version 14.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available in **All** Editions except **Database.com** for Google Apps Premier Edition accounts. See the Salesforce online help for more information.

Fields

Field	Details
Name	Type string Properties Create, Filter, Group, Sort, Update Description The name of the Google document.
Owner	Type reference

Field	Details
	Properties Create, Defaulted on create, Filter, Nillable, Update
	Description The ID of the user who currently owns this Google Document. Default value is the user logged in to the API to perform the create.
ParentId	Type reference
	Properties Create, Filter
	Description Required. ID of the attachment's parent object. The following objects are supported as parents of Google documents: Account, Asset, Campaign, Case, Contact, Contract, Custom Object Behavior, Lead, Opportunity, Product2, and Solution.
Url	Type string
	Properties Create, Filter, Nillable, Update
	Description The URL of the Google document.

Group

A set of User records.

Groups are sets of users. They can contain individual users, other groups, the users in a particular role or territory, or the users in a particular role or territory plus all the users below that role or territory in the hierarchy.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `search()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Authenticated internal and external users can access this object.

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description The description of the group. This field is available in API version 62.0 and later.
DefaultDivision	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description This record's default division. Only applicable if divisions are enabled.
DeveloperName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. This name is unique by group type and corresponds to Group Name in the user interface. This field is available in API version 24.0 and later.  Note: When creating large sets of data, always specify a unique DeveloperName for each record. If no DeveloperName is specified, performance may slow while Salesforce generates one for each record. Only your Salesforce org's internal users can access this field.
DoesIncludeBosses	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether records shared with users in this group are also shared with users higher in the role hierarchy (<code>true</code>) or not (<code>false</code>). This field is only available for public

Field	Details
	groups. This field corresponds to the Grant Access Using Hierarchies checkbox in Setup. This field is available in API version 18.0 and later.
DoesSendEmailToMembers	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the email is sent (<code>true</code>) or not sent (<code>false</code>) to the group members. The email is sent to queue members as well.
Email	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description Email address for a group of type Case. Applies only for a case queue.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Name of the group. Corresponds to Label on the user interface.
OwnerId	Type reference Properties Filter, Group, Sort Description ID of the user who owns the group. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Organization, User
QueueRoutingConfigId	Type reference

Field	Details
	Properties Create, Delete, Query, Retrieve, Update Description The ID of the queue routing configuration associated with the queue.
RelatedId	Type reference Properties Filter, Group, Nillable, Sort Description Represents the ID of the associated groups. For groups of type "Role," the ID of the associated UserRole. The RelatedId field is polymorphic. This is a polymorphic relationship field. Relationship Name Related Relationship Type Lookup Refers To User, UserRole
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Required. Type of the group. One of the following values: • AllCustomerPortal—Public group that includes all Customer Portal or Customer Community Plus users. This type is only available when a Customer Portal or a Customer Site is enabled for your org. • ChannelProgramGroup—Public group for partners in a channel program. • CollaborationGroup—Chatter group. • Manager—Public group that includes a user's direct and indirect managers. This group is read-only. • ManagerAndSubordinatesInternal—Public group that includes a user and the user's direct and indirect reports. This group is read-only. • Organization—Public group that includes all the User records in the organization. This group is read-only. • Participant—Compliant Data Sharing group that includes internal users who have the Use Compliant Data Sharing permission. A group can contain other participant groups only, or a group can contain both internal users with the Use

Field	Details
	Compliant Data Sharing permission and other participant groups. This value is only available when Compliant Data Sharing is enabled for your org. • <code>PRMOrganization</code>—Public group that includes all the partners in an organization that has the partner site or portal feature enabled. • <code>Queue</code>—Public group that includes all the User records that are members of a queue. • <code>Regular</code>—Standard public group. When you <code>create()</code> a group, its type must be <code>Regular</code>, unless a partner site or portal is enabled for the organization, in which case the type can be <code>Regular</code> or <code>PRMOrganization</code>. • <code>Role</code>—Public group that includes all the User records in a particular <code>UserRole</code>. • <code>RoleAndSubordinates</code>—Public group that includes all the User records in a particular <code>UserRole</code> and all the User records in any subordinate <code>UserRole</code>. Only available when digital experiences is enabled for your org and Experience Cloud site users are created with external account roles other than a shared person account role. • <code>RoleAndSubordinatesInternal</code>—Public group that includes all the User records in an internal <code>UserRole</code>, excluding customer and partner roles, and all the User records in any subordinate internal <code>UserRole</code>. • <code>SharingRecordCollGroup</code>—Public group that has access to a <code>SharingRecordCollection</code>. • <code>Territory</code>—Public group that includes all the User records in an organization that has the territory feature enabled. • <code>TerritoryAndSubordinates</code>—Public group that includes all the User records in a particular <code>UserRole</code> and all the User records in any subordinate <code>UserRole</code> in an organization that has the territory feature enabled. Only <code>Personal</code>, <code>Regular</code>, and <code>Queue</code> can be used when creating a group. The other values are reserved.

Usage

Unlike users, this object can be deleted.

Only public groups are accessible via the API. Personal groups are not available.

In API version 34.0 and later, you can query a group using `Related.Name` to retrieve the group's name. `Related.Name` is supported for public groups, user roles, territories, manager groups, and user names.

In API version 13.0 and later, if you delete a public group, it is deleted even if it has been used in sharing, consistent with the behavior for `UserRole`. In versions before 13.0, such sharing prevents the record from being deleted.

SEE ALSO:

[GroupMember](#)

[Overview of Salesforce Objects and Fields](#)

GroupMember

Represents a User or Group that is a member of a public group.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
GroupId	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the Group. This is a relationship field. Relationship Name Group Relationship Type Lookup Refers To Group
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the User or Group that is a direct member of the group. This field is a polymorphic relationship field. Relationship Name UserOrGroup Relationship Type Lookup Refers To Group, User

Usage

If your group contains more than 10,000 members, for improved performance, you can adjust group membership using the GroupMember API object instead of the group's detail page in Setup. You can also adjust membership using the public group's access summary or user access policies in Setup.

A record exists for every User or Group who is a direct member of a public group whose `Type` field is set to Regular. User records that are indirect members of Regular public groups aren't listed as group members. A User can be an indirect member of a group if he or she is in a UserRole above the direct group member in the hierarchy, or if he or she is a member of a group that is included as a subgroup in that group.

If you attempt to create a record that matches an existing record, the system simply returns the existing record.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

GroupMembershipEventLog

Group Membership events capture details about changes to public group and queue membership, such as when members are added to or removed from the public group or queue. This object is available in API version 64.0 and later.

 **Note:** This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
ClientId	Typestring PropertiesFilter, Group, Nillable, Sort DescriptionIP address of the client employing salesforce.com services.
CpuTime	Typedouble PropertiesFilter, Nillable, Sort

Field	Details
	Description Amount of cpu cycles used by the request
GroupIdentifier	Type string Properties Filter, Group, Nillable, Sort Description ID of the group whose membership changed.
GroupType	Type string Properties Filter, Group, Nillable, Sort Description The type of group being updated.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.
MemberIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the member added to or removed from the group. Public groups can contain individual users, other groups, or users in a specified role or territory. Queues can contain individual users, roles, public groups, territories, connections, or partner users.
OperationType	Type string Properties Filter, Group, Nillable, Sort Description The type of operation that occurred, such as a group member being added or removed from a group.

Field	Details
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code>.
RunTime	Type double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT.
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The 15-character ID of the user who's using Salesforce services through the UI or the API.

GuestBuyerProfile

Represents a store's guest buyer profile, which allows unauthenticated buyers to browse the store. This object is available in API version 51.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Fields

Field	Details
<code>CurrencyIsoCode</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Currency displayed to the guest buyer when they're viewing the store. Possible values are: • <code>USD</code>—U.S. Dollar
<code>Description</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Detailed description of the profile. Includes information like which store the profile is used in.
<code>LastReferencedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The last date and time when one or more of the fields were modified

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The last date and time when one or more of the fields were viewed
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the guest buyer profile. Including a reference to the store helps with later identification.

HashtagDefinition

HashtagDefinition represents hashtag (#) topics in public Chatter posts and comments. Public posts and comments include those on profiles and in public groups, but not those on records or in private groups. This object is available in API version 26.0 and later.

 **Important:** Starting in Spring '16, API access to HashtagDefinition is disabled across all API versions. Any integrations relying on API queries to this object stop working. You can continue to use hashtags in posts and comments, and the hashtags continue to create corresponding topics. We recommend that you redirect all API queries and reports using the HashtagDefinition object to use the Topic object instead. For more information, see [Retiring the Legacy HashtagDefinition Object—FAQs](#).

Supported Calls

`delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field Name	Details
HashtagCount	Type int Properties Filter, Group, Nillable, Sort Description The number of times a hashtag topic is used.

Field Name	Details
Name	Type string Properties Filter, Nillable, Sort Description The string of characters following the hashtag (#) in a hashtag topic.
NameNorm	Type string Properties Filter, Nillable, Sort Description The string of characters following the hashtag (#) in a hashtag topic, normalized to remove capitalization and punctuation.
NetworkId	Type reference Properties Filter, Group, Nillable, Sort Description Identifier of the community to which the HashtagDefinition belongs. This field is available only if digital experiences is enabled in your org.

Usage

Use this object to identify public hashtag topics and see how often they're used.

SEE ALSO:

[Topic](#)

HealthCareDiagnosis

Represents information related to industry-standard healthcare diagnosis codes. Before the Spring '21 release, the Healthcare Procedure and Healthcare Diagnosis objects stored codes specifically related to procedures and diagnoses. These codes were used for prior-authorization requests and approval processes. Since the Spring'21 release, Health Cloud uses the Code Set and Code Set Bundle objects for this purpose instead.

 **Example:** The Code Set and Code Set Bundle objects improve on the old objects by adding support for terminology system information. This added support comes in the form of the Source System and Version fields.

 **Note:** Objects, flows, and apps that previously used Healthcare Diagnosis and Healthcare Procedure have been or will be extended to support the use of Code Set and Code Set Bundle. Healthcare Diagnosis and Healthcare Procedure are to be gradually phased out with future releases.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
Category	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Indicates the category for this diagnosis such as newborn, pediatric, maternity, or adult.
Code	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Industry-standard diagnosis code.
CodeDescription	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the diagnosis code.
CodeType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description Type of diagnosis code represented in the record such as ICD-9 or ICD-10.
EffectiveDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Start date for the code.
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description End date for the code.
Gender	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Indicates whether this diagnosis is for males, females, or all genders.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the diagnosis code is available for use.
IsComplicationOrComorbidity	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this diagnosis is used to represent a complication or comorbidity.

Field Name	Details
IsHospitalAcquiredCondition	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this diagnosis represents a condition acquired while in the hospital.
IsMajorComplicationOrComorbidity	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this diagnosis is used to represent a major complication or comorbidity.
IsPresentOnAdmissionExempt	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether diagnosis code is exempt from the diagnosis present on admission requirement.
IsPrimaryDiagnosis	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether diagnosis code can be used as primary diagnosis only, or can be used in any diagnosis sequence.
IsUnacceptablePrincipalDxIpAdmit	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether diagnosis code is an unacceptable principal diagnosis for inpatient admission per Medicare Code Edits.

Field Name	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the code that displays in search and lookup fields. Salesforce recommends using the code along with the description to populate this field. For example, use <Code>: <Description> or <Code>-<Description> such as (E08.37X9 - Diabetes mellitus due to underlying condition).
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who owns this record. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

HealthCareDiagnosisChangeEvent (API version 60.0)

Change events are available for the object.

HealthCareDiagnosisHistory

History is available for tracked fields of the object.

HealthCareDiagnosisOwnerSharingRule

Sharing rules are available for the object.

HealthCareDiagnosisShare

Sharing is available for the object.

HealthCareProcedure

Represents information related to industry-standard healthcare procedure codes. Before the Spring '21 release, the Healthcare Procedure and Healthcare Diagnosis objects stored codes specifically related to procedures and diagnoses. These codes were used for prior-authorization requests and approval processes. Since the Spring'21 release, Health Cloud uses the Code Set and Code Set Bundle objects for this purpose instead.



Example: The Code Set and Code Set Bundle objects improve on the old objects by adding support for terminology system information. This added support comes in the form of the Source System and Version fields.



Note: Objects, flows, and apps that previously used Healthcare Diagnosis and Healthcare Procedure have been or will be extended to support the use of Code Set and Code Set Bundle. Healthcare Diagnosis and Healthcare Procedure are to be gradually phased out with future releases.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
Category	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Category of the procedure code such as anesthesia, surgery, radiology, and so on.
Code	Type string

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Industry standard procedure code such as CPT or HCPCS.
CodeDescription	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the procedure code.
CodeShortDescription	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Short description of the procedure code.
CodeType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Type of procedure code represented in the record such as CPT or HCPCS.
EffectiveDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Start date for the code.
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description End date for the code.

Field Name	Details
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the diagnosis code is available for use.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the code that displays in search and lookup fields. Salesforce recommends using the code along with the description to populate this field. For example, use <Code>: <Description> or <Code>-<Description> such as 95115: Allergy injection.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who owns this record.

Field Name	Details
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[HealthCareProcedureChangeEvent](#) (API version 60.0)

Change events are available for the object.

[HealthCareProcedureHistory](#)

History is available for tracked fields of the object.

[HealthCareProcedureOwnerSharingRule](#)

Sharing rules are available for the object.

[HealthCareProcedureShare](#)

Sharing is available for the object.

Holiday

Represents a period of time during which your customer support team is unavailable. Business hours and escalation rules associated with business hours are suspended during any holidays with which they are affiliated.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Customer Portal users can't access this object.

All users, even those without the "View Setup and Configuration" user permission, can view holidays via the API.

Fields

Field	Details
ActivityDate	Type date

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description If the Holiday <code>IsAllDay</code> flag is set to <code>true</code> (indicating that it is an all-day holiday), then the holiday due date information is contained in the <code>ActivityDate</code> field. This field is a date field with a timestamp that is always set to midnight in the Coordinated Universal Time (UTC) time zone. The timestamp is not relevant, and you should not attempt to alter it to account for any time zone differences.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Text description of the holiday.
EndTimeInMinutes	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The end time of the holiday in minutes.
IsAllDay	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the duration of the holiday is all day (<code>true</code>) or not (<code>false</code>).
IsRecurrence	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the holiday is scheduled to repeat itself (<code>true</code>) or only occurs once (<code>false</code>). This is a read only field on update, but not on create. If this field value is <code>true</code>, then any recurrence fields associated with the given recurrence type must be populated.
Name	Type string

Field	Details
	Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the holiday.
NextOccurrenceDate	Type date Properties Filter, Group, Nillable Description The next date of the holiday. Applies to recurring holidays only. Available in API version 58.0 and later. To access this field, you must have Field Service enabled and the Field Service Standard permission. This field isn't sortable. To compare this date to other dates, you must parse the string into a date value to compare it to other dates.
RecurrenceDayOfMonth	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The day of the month on which the holiday repeats.
RecurrenceDayOfWeekMask	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The day or days of the week on which the holiday repeats. This field contains a bitmask. For each day of the week, the values are as follows: • Sunday = 1 • Monday = 2 • Tuesday = 4 • Wednesday = 8 • Thursday = 16 • Friday = 32 • Saturday = 64 Multiple days are represented as the sum of their numerical values. For example, Tuesday and Thursday = 4 + 16 = 20.

Field	Details
RecurrenceEndDateOnly	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The last date on which the holiday repeats. For multiday recurring events, this is the day on which the last occurrence starts.
RecurrenceInstance	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The frequency of the recurring holiday. For example, 2nd or 3rd.
RecurrenceInterval	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The interval between recurring holidays.
RecurrenceMonthOfYear	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The month of the year on which the event repeats.
RecurrenceStartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date when the recurring holiday begins. Must be a date and time before RecurrenceEndDateOnly.
RecurrenceType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description Indicates how often the holiday repeats. For example, daily, weekly, or every Nth month (where “Nth” is defined in <code>RecurrenceInstance</code>).
<code>StartTimeInMinutes</code>	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The start time of the holiday in minutes.

Usage

Use this object to view and update holidays, which specify dates and times at which associated business hours and escalation rules are suspended.

IconDefinition

Represents the icon-related metadata for a custom tab. This object is available in API version 43.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Fields

Field Name	Details
<code>ContentType</code>	Type string Properties Filter, Group, Nillable, Sort Description The tab icon’s content type, for example, “image/png.”
<code>DurableId</code>	Type string Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description A unique virtual Salesforce ID for the icon.
Height	Type int Properties Filter, Group, Nillable, Sort Description The tab icon's height in pixels. If the icon content type is an SVG type, height and width values are not used.
TabDefinitionId	Type string Properties Filter, Nillable, Sort Description The <code>TabDefinition</code> ID. This is a relationship field. Relationship Name TabDefinition Relationship Type Lookup Refers To TabDefinition
Theme	Type string Properties Filter, Group, Nillable, Sort Description The icon's theme.
Url	Type string Properties Filter, Group, Nillable, Sort Description The fully qualified URL for this icon.

Field Name	Details
Width	Type int Properties Filter, Group, Nillable, Sort Description The tab icon's width in pixels. If the icon content type is an SVG type, height and width values are not used.

Idea

Represents an idea on which users are allowed to comment and vote, for example, a suggestion for an enhancement to an existing product or process. This object is available in API version 12 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`



Note: For other standard objects, the `describeLayout()` call returns the `recordTypeMappings` section that contains the layout ID and picklist values for each record type. However, the `recordTypeMappings` section and the fields it includes are not available for the Idea object.

When performing a SOSL search on Idea objects, IdeaComment objects are also searched.

Fields

Field	Details
AttachmentBody	Type base64 Properties Create, Nillable, Update Description File data for the attachment. This field is available in API version 28.0 and later.
AttachmentContentType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Type of the attachment. This field is available in API version 28.0 and later.

Field	Details
AttachmentLength	Type int Properties Filter, Group, Nillable, Sort Description Size of the attachment in bytes. This field is available in API version 28.0 and later.
AttachmentName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Name of the attachment. This field is available in API version 28.0 and later.
Body	Type textarea Properties Create, Nillable, Update Description Description of the Idea.
Categories	Type multipicklist Properties Create, Filter, Nillable, Update Description Customizable multi-select picklist used to organize Ideas into logical groupings.  Note: This field is only available if your organization has the <code>Categories</code> field enabled. This field is enabled by default in organizations created after API version 14 was released. If the <code>Categories</code> field is enabled, API versions 13 and earlier do not have access to either the <code>Categories</code> or <code>Category</code> fields.
Category	Type picklist Properties Create, Filter, Nillable, Update Description Customizable picklist of values used to organize Ideas into logical groupings.  Note: This field is not available if your organization has the multi-select <code>Categories</code> field enabled.

Field	Details
CommunityId	Type reference Properties Create, Filter, Group, Sort Description The zone ID associated with the idea. Once you create an idea, you can't change the zone ID associated with that idea.  Note: API version 12 does not support zone ID. If you create an idea in version 12, your idea is automatically posted to the oldest zone that you have permission to access. This is a relationship field. Relationship Name Community Relationship Type Lookup Refers To Community
CreatorFullPhotoUrl	Type string Properties Filter, Group, Nillable, Sort Description URL of the user's profile photo. This field is available in API version 28.0 and later.
CreatorName	Type string Properties Filter, Group, Nillable, Sort Description Name of the user who posted the idea or commented on the idea. This field is available in API version 28.0 and later.
CreatorSmallPhotoUrl	Type string Properties Filter, Group, Nillable, Sort Description URL of the user's thumbnail photo. This field is available in API version 28.0 and later.

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for organizations with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
IdeaThemeID	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Identifies the idea theme associated with the idea.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
IsHtml	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Read-only. If this value is <code>true</code>, your organization has the Ideas HTML editor enabled, and the Idea Body may contain HTML. If this value is <code>false</code>, the HTML editor is disabled and the Idea Body only contains regular text.
IsMerged	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Read only. Indicates whether the idea has been merged with a parent idea (<code>true</code>) or not (<code>false</code>). You can't vote for or add comments to a merged idea.  Note: In API version 27, <code>IsMerged</code> replaces <code>IsLocked</code>. Existing formula fields that use <code>IsLocked</code> must be edited to use <code>IsMerged</code>.

Field	Details
LastCommentDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time the last comment (child IdeaComment object) was added.
LastCommentId	Type reference Properties Filter, Group, Nillable, Sort Description Read only. The ID of the last comment (child IdeaComment object). This is a relationship field. Relationship Name LastComment Relationship Type Lookup Refers To IdeaComment
LastReferencedDate	Type date Properties Filter, Nillable, Sort, Update Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type date Properties Filter, Nillable, Sort, Update Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
NumComments	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort

Field	Details
	Description The number of comments (child IdeaComment objects) that users have submitted for the given idea.
ParentIdeaId	Type reference Properties Filter, Group, Nillable, Sort Description The ID associated with this idea's parent idea. When multiple ideas are merged together, one idea becomes the parent (master) of the other ideas. The <code>ParentIdeaId</code> is automatically set when you merge ideas. This is a relationship field. Relationship Name ParentIdea Relationship Type Lookup Refers To Idea
RecordTypeId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the record type assigned to this object. This is a relationship field. Relationship Name RecordType Relationship Type Lookup Refers To RecordType
Status	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Customizable picklist of values used to specify the status of an idea.

Field	Details
Title	Type string Properties Create, Filter, Group, Sort, Update Description The descriptive title of the idea.
VoteScore	Type double Properties Filter, Nillable, Sort Description The internal score of the Idea, used to sort Ideas on the Popular tab in the application user interface. The internal algorithm that determines the score gives older votes less weight than newer votes, simulating exponential decay. The score itself does not display in the application user interface.  Note: Unlike other fields of type double, you can't use a SOQL aggregate function with this field.
VoteTotal	Type double Properties Filter, Nillable, Sort Description An Idea's total number of points. Each vote a user makes is worth ten points, therefore the value of this field is ten times the number of votes an idea has received.  Note: Unlike other fields of type double, you can't use a SOQL aggregate function with this field.

 **Note:** If you are importing Idea data and need to set the value for an audit field, such as `CreatedDate`, contact Salesforce. Audit fields are automatically updated during API operations unless you request to set these fields yourself..

Usage

Use this object to track ideas, which are written suggestions on which users can vote and comment.

SEE ALSO:

[IdeaComment](#)

[Vote](#)

IdeaComment

Represents a comment that a user has submitted in response to an idea.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

 **Note:** When performing a SOSL search on IdeaComment objects, Idea objects are also searched.

Fields

Field	Field Type
CommentBody	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Body of the submitted comment.
CommunityId	Type reference Properties Filter, Group, Nillable, Sort Description The zone ID associated with the idea. Once you create an idea, you can't change the zone ID associated with that idea.  Note: API version 12 does not support zone ID. If you create an idea in version 12, your idea is automatically posted to the oldest zone that you have permission to access.
CreatorFullPhotoUrl	Type string Properties Filter, Group, Nillable, Sort Description URL of the user's profile photo. This field is available in API version 28.0 and later.
CreatorName	Type string

Field	Field Type
	Properties Filter, Group, Nillable, Sort Description Name of the user who posted the idea or commented on the idea. This field is available in API version 28.0 and later.
CreatorSmallPhotoUrl	Type string Properties Filter, Group, Nillable, Sort Description URL of the user's thumbnail photo. This field is available in API version 28.0 and later.
IdeaId	Type reference Properties Create, Filter, Group, Sort Description ID of the idea on which this comment was made. This is a relationship field. Relationship Name Idea Relationship Type Lookup Refers To Idea
IsHtml	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Read-only. If this value is <code>true</code> , your organization has the Ideas HTML editor enabled, and the <code>CommentBody</code> field may contain HTML. If this value is <code>false</code> , the HTML editor is disabled and the <code>CommentBody</code> field only contains regular text.
UpVotes	Type int Properties Filter, Group, Nillable, Sort

Field	Field Type
	Description
	Total number of up votes for the question.

 **Note:** If you import these records, and need to set the value for an audit field, such as `CreatedDate`, contact Salesforce. Audit fields are automatically updated during API operations unless you request to set these fields yourself.

Usage

Use this object to track comments on ideas, which are users' text responses to ideas.

SEE ALSO:

[Idea](#)

[Vote](#)

IdeaReputation

Represents a collection of statistics and scores derived from a user's activity within an Ideas zone or internal organization. This object is available in API version 28.0 and later.

Supported Calls

`query()`, `retrieve()`,

Fields

Field	Details
<code>CommentCount</code>	Type int Properties Filter, Group, Nillable, Sort Description The number of comments a user has created in a zone or the internal organization. This number excludes comments the user creates on his or her own idea.
<code>CommentsReceivedCount</code>	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of comments a user has received in a zone or the internal organization.
ContextId	Type reference Properties Filter, Group, Namepointing, Nillable, Sort Description The ID of the zone or internal organization.
DownVotesGivenCount	Type int Properties Filter, Group, Nillable, Sort Description The number of down votes a user has given in a zone or the internal organization.
DownVotesReceivedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of down votes a user has received in a zone or the internal organization.
IdeaCount	Type int Properties Filter, Group, Nillable, Sort Description The number of ideas a user has created in a zone or the internal organization.
ReputationLevel	Type string Properties Nillable Description The reputation level that a user has achieved based on their score in a zone or within an organization.
Score	Type double

Field	Details
	Properties Filter, Nillable, Sort Description The total score of a user's activity within a zone or within an organization.
UpVotesGivenCount	Type int Properties Filter, Group, Nillable, Sort Description The number of up votes a user has given in a zone or the internal organization. This number doesn't include the default vote the system applies when the user creates the idea.
UpVotesReceivedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of up votes a user has received in a zone or the internal organization.
UserId	Type reference Properties Filter, Group, Sort Description The user ID associated with the reputation.

Usage

Use to query a user's reputation within a zone.

IdeaReputationLevel

Represents a reputation level within an Ideas zone or internal organization and is used by the system to calculate reputation. You can create up to 25 levels per zone or internal organization. This object is available in API version 28.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
ContextId	Type reference Properties Create, Filter, Group, Namepointing, Sort, Update Description The ID of the zone or internal organization.
Name	Type string Properties Create, Filter, Group, Sort, Update Description Name of the reputation level. The name must be unique within the zone or internal organization. Maximum size is 50 characters.
Threshold	Type int Properties Create, Filter, Group, Sort, Update Description Minimum number of points for this level. The threshold must be unique within the zone or internal organization and must be greater than or equal to zero.

Usage

Use to create or edit reputation levels for an Ideas zone or internal organization.

IdeaTheme

Represents an invitation to zone members to submit ideas that are focused on a specific topic. This object is available in API version 26 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`,

Fields

Field Name	Details
Categories	Type multipicklist Properties Create, Filter, Nillable, Update Description Customizable multi-select picklist used to organize ideas and idea themes into logical groupings.
CommunityId	Type reference Properties Create, Filter, Group, Nillable, Sort, Description The zone ID associated with the idea theme.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for organizations with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
Description	Type textarea Properties Create, Nillable, Update Description Description of the idea theme.
EndDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date marking the end of the idea theme.
LastReferencedDate	Type date

Field Name	Details
	Properties Filter, Nillable, Sort, Update Description The timestamp for when the current user last viewed a record related to this record.
StartDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date that the idea theme begins.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Customizable picklist of values used to specify the status of the idea theme.
Title	Type string Properties Create, Filter, Group, idLookup, Namefield, Sort, Update Description Title of the idea theme.

Usage

Use the object to track ideas that are submitted to an idea theme.

IdpEventLog

Represents the Identity Provider Event Log. This log records both problems and successes with inbound SAML or OpenID Connect authentication requests from another app provider. It also records outbound SAML responses when Salesforce is acting as an identity provider. This object is available in API version 39.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
AppId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the app provider seeking authentication.
AuthSessionId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the authentication session.
ErrorCode	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The error code for the authentication issue. Possible values are: • AppAccessDenied—Error: App access denied • AppBlocked—Error: App blocked • ClientUnapproved—Error: Invalid grant • CodeExpired—Error: Expired authorization code • ForceAuthNLogout—User logged out due to forced authentication request • InternalError—Error: Internal Error • InvalidAuthnRequest—Error: Unable to parse AuthnRequest from service provider • InvalidClientCredentials—Error: Invalid client credentials • InvalidCode—Error: Invalid authorization code • InvalidDeviceId—Error: Invalid device ID • InvalidIdpEndpoint—Error: Invalid Identity Provider Endpoint URL • InvalidIssuer—Error: Invalid Issuer • InvalidScope—Error: Invalid scope(s) • InvalidSessionLevel—Error: Invalid session level • InvalidSettings—Error: IdP certificate is invalid or does not exist • InvalidSignature—Error: Invalid Signature

Field	Details
	- InvalidSp—Error: Misconfigured or invalid service provider - InvalidSpokeSp—Error: Invalid spoke SP settings - InvalidUserCredentials—Error: Invalid user credentials - NoAccess—Error: User does not have access to this service provider - NoCustomAttrValue—Error: User does not have a value for the subject custom attribute - NoCustomField—Error: Custom field not found - NoSpokeId—Error: No Spoke ID found - NoSubdomain—Error: No My Domain deployed in the org - NoUserFedId—Error: User does not have a Federation Identifier selected - OAuthError—OAuth Error - Success - UnableToResolve—Error: Unable to resolve request into a Service Provider - UnknownError—Unknown Error
IdentityUsed	Type string Properties Filter, Nillable, Sort Description The identity (username) of the user being authenticated.
InitiatedBy	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The code describing how the authentication request was initiated. Possible values are: - IdP—IdP-Initiated SAML - OAuthAuthorize—OAuth Authorization - OAuthTokenExchange—OAuth Token Exchange - SP—SP-Initiated SAML
OptionsHasLogoutUrl	Type boolean Properties Filter

Field	Details
	Description Whether a logout URL has been assigned to the app. This URL is where users are redirected when they log out.
SamLEntityUrl	Type string Properties Filter, Sort Description The authentication URL of the SAML provider.
SsoType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of SSO. Options are: • 0–SAML • 1–OpenID Connect
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The date and time on which the event occurred.
UserId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user seeking authentication.

IframeWhiteListUrl

Represents a list of trusted external domains that you allow to frame your Embedded Service, Surveys, and Visualforce pages. This object is available in API version 45.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. Because changing terms in our code can break current implementations, we maintained this object's name.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
Context	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The type of content in the iframe. Valid values are: • Surveys • VisualforcePages • DisclosureAndComplianceHubConnector
Url	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The unique domain that is allowed to frame your Visualforce pages, surveys, or Disclosure and Compliance Hub Connector. Accepts these formats: example.com, *example.com, and https://example.com.

Usage

To use this object for framing Visualforce pages, on Session Settings in Setup, select **Enable clickjack protection for customer Visualforce pages** either **with headers disabled** or **with standard headers**. These options both allow framing of Visualforce pages on trusted external domains and provide clickjack protection.

Alternatively, you can customize session settings via the SecuritySettings Metadata API type. To use the `IframeWhiteListUrl` object, set either the `enableClickjackNonsetupUser` or `enableClickjackNonsetupUserHeaderless` field to `true`. For more information, see [SecuritySettings](#) in the Metadata API Developer Guide.

Image

Represents the details of an image. This object is available in API version 47.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AlternateText	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Accessibility text to explain the image in words.
CapturedAngle	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Angle at which the image was captured.
ContentDocumentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Unique identifier of the content document where image is stored. This is a relationship field. Relationship Name ContentDocument Relationship Type Lookup Refers To ContentDocument
ImageClass	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The image category.

Field	Details
	Possible values are: - FOOD - LOGOS - OBJECTS - SCENES
ImageClassObjectType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of image. Used in Einstein Object Detection to identify whether the image is used to detect objects or build a model. Possible values are: - DETECTION—Actual Image - FEEDBACK - TRAINING
ImageViewType	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Orientation of the image.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if an image is active. The default value is False. An active image can be used for building or updating a model in Einstein Object Detection.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date on which the image was last referenced.

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date on which the image was last viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description Name of the record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Unique identifier of the record owner. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
Title	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Title of the image.
Url	Type url Properties Create, Filter, Nillable, Sort, Update Description Public URL of the image file.

Incident

An Incident is any unplanned business interruption that has wide-sweeping impacts and requires an urgent fix. This object contains the details of the incident, documenting the history of the incident from registration to closure. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Category	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The type of incident.
Description	Type textarea Properties Create, Nillable, Update Description A description of the incident. This field can store up to 32 KB of data, but only the first 255 characters appear in reports.
DetectedDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time (in UTC) when the incident was first detected.
EndDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time (in UTC) when the incident ended.

Field	Details
Impact	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The incident's impact. Possible values are: • High • Low • Medium The default value is 'High'.
IncidentNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The unique, system-generated number for the incident.
IsMajorIncident	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the incident is business-critical. If set to <code>true</code>, the incident is widespread and business-critical. The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time (in UTC) when the current user last accessed this record, a list view, or another related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The date and time (in UTC) when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description A polymorphic relationship field that represents the user or group assigned to resolve the incident. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ParentIncidentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The unique ID of an incident above one or more related incidents in an incident hierarchy. This is a relationship field. Relationship Name ParentIncident Relationship Type Lookup Refers To Incident
Priority	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The impact and urgency of the incident. Possible values are: • Critical

Field	Details
	• High • Low • Moderate The default value is 'Critical'.
PriorityOverrideReason	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The reason why a priority should be changed or edited.
ReportedMethod	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates how the incident was reported to customer service.
ResolutionDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time (in UTC) when the incident was resolved.
ResolutionSummary	Type textarea Properties Create, Nillable, Update Description A description of possible steps to resolve the incident.
ResolvedById	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The unique ID of the user who resolved the incident. This is a relationship field.

Field	Details
	Relationship Name ResolvedBy Relationship Type Lookup Refers To User
StartDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time (in UTC) when the incident began.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Any custom or granular stages a customer may want to track. Possible values are: - Completed - In Progress - New - Open - Problem Created - Resolved The default value is 'New'.
StatusCode	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The incident's status. Possible values are: - Completed - InProgress - New - Open

Field	Details
	• ProblemCreated • Resolved The default value is 'New'.
SubCategory	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The type of incident. One level deeper than Category. Administrators set field values.
Subject	Type string Properties Create, Filter, Group, Sort, Update Description A brief description of the incident.
Type	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The type of incident, for example, question or problem. Administrators set field values.
Urgency	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description A measure of how long the resolution can be delayed until an incident, problem, or change has a significant business impact. Possible values are: • High • Low • Medium The default value is 'High'.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

IncidentChangeEvent on page 68

Change events are available for the object.

IncidentFeed on page 55

Feed tracking is available for the object.

IncidentHistory on page 63

History is available for tracked fields of the object.

IncidentOwnerSharingRule on page 65

Sharing rules are available for the object.

IncidentShare on page 67

Sharing is available for the object.

IncidentRelatedItem

Represents a junction object that relates an Incident to an Asset or Product. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AssetId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The Asset ID that's linked to the Incident. This field is a relationship field. Relationship Name Asset Relationship Type Lookup Refers To Asset

Field	Details
Comment	Type textarea Properties Create, Nillable, Update Description A description of the incident as it relates to the item.
ImpactLevel	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The related item's impact on the incident. Possible values are: • High • Low • Medium The default value is High.
ImpactType	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The effect of the related item on business operations. Possible values are: • Business-Blocking • Not Business-Blocking • Partially Business-Blocking The default value is Business-Blocking.
IncidentId	Type reference Properties Create, Filter, Group, Sort Description The Incident ID that's linked to the Asset. This field is a relationship field.

Field	Details
	Relationship Name Incident
	Relationship Type Lookup
	Refers To Incident
Name	Type string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description The auto-generated ID of the incident-related item.
Product2Id	Type reference
	Properties Create, Filter, Group, Nillable, Sort
	Description The product (Product2) ID that's linked to the Incident.. This field is a relationship field.
	Relationship Name Product2
	Relationship Type Lookup
	Refers To Product2

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[IncidentRelatedItemChangeEvent](#) on page 68

Change events are available for the object.

[IncidentRelatedItemFeed](#) on page 55

Feed tracking is available for the object.

[IncidentRelatedItemHistory](#) on page 63

History is available for tracked fields of the object.

Individual

Represents a customer's data privacy and protection preferences. Data privacy records based on the Individual object store your customers' preferences. Data privacy records are associated with related leads, contacts, person accounts, and users. This object is available in API version 42.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `merge()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- This object is available if Data Protection and Privacy is enabled.

Fields

Field Name	Details
BirthDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The customer's birthdate.
CanStorePiiElsewhere	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indication that you can store the customer's personally identifiable information (PII) outside of their legislation area. For example, you could store an EU citizen's PII data in the US.
ChildrenCount	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of children the customer has.
ConsumerCreditScore	Type int

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The person's credit score (for example, 740).
ConsumerCreditScoreProviderName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the company that provided the credit score.
ConvictionsCount	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of convictions for the customer.
DeathDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The customer's death date.
FirstName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The customer's first name. Maximum size is 40 characters.
HasOptedOutGeoTracking	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Preference to not track geolocation on mobile devices.
HasOptedOutProcessing	Type boolean

Field Name	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Preference to not process personal data, which can include collecting, storing, and sharing personal data.
HasOptedOutProfiling	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Preference to not process data for predicting personal attributes, such as interests, behavior, and location.
HasOptedOutSolicit	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Preference to not solicit products and services.
HasOptedOutTracking	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Preference to not track customer web activity and whether the customer opens email sent through Salesforce.
HasPrivacyHold	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates the Privacy Hold status.
IndividualsAge	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates whether the customer is considered to be a minor.

Field Name	Details
InfluencerRating	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description A measure of the person's influence, irrespective of how we do business with them.
IsHomeOwner	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the customer owns a home.
LastName	Type string Properties Create, Filter, Group, Sort, Update Description Required. The customer's last name. Maximum size is 80 characters.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record.
MasterRecordId	Type reference Properties Filter, Group, Nillable, Sort Description If this object was deleted as the result of a merge, this field contains the ID of the record that was kept. If this object was deleted for any other reason, or hasn't been deleted, the value is <code>null</code>. This is a relationship field. Relationship Name MasterRecord

Field Name	Details
	Relationship Type Lookup Refers To Individual
MilitaryService	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates whether the customer has served in the military.
Name	Type string Properties Filter, Group, Sort Description Concatenation of <code>FirstName</code> and <code>LastName</code> . Maximum size is 203 characters, including whitespaces.
Occupation	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The customer's occupation. Maximum size is 150 characters.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of the account associated with this customer. This is a relationship field. Relationship Name Owner Relationship Type Lookup Refers To User

Field Name	Details
Salutation	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The title for addressing the customer, such as Dr. or Mrs.
SendIndividualData	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Preference to export personal data for delivery to the customer.
ShouldForget	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Preference to delete records and personal data related to this customer.
Website	Type url Properties Create, Filter, Group, Nillable, Sort, Update Description The URL for the customer's website.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

IndividualChangeEvent (API version 47.0)

Change events are available for the object.

IndividualHistory

History is available for tracked fields of the object.

IndividualShare

Sharing is available for the object.

IndividualApplicationItem

Captures individual application input data that is used during run-time. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available only with the EAndU Cloud Program Access permission set.

Fields

Field	Details
IndividualApplicationId	Type reference Properties Create, Filter, Group, Sort, Update Description The Individual Application parent object associated with the Individual Application Item. This field is a relationship field. Relationship Name IndividualApplication Relationship Type Lookup Refers To IndividualApplication
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the object related to the Individual Application.
RelatedItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The related object associated with the Individual Application Item. This field is a polymorphic relationship field. Relationship Name RelatedItem Relationship Type Lookup Refers To Benefit, ProgramProduct
Status	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Specifies the approval status of the Individual Application. Possible values are: • Approved • Declined • In Progress • Pending

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

IndividualApplicationItemChangeEvent

Change events are available for the object.

IndividualApplicationItemFeed

Feed tracking is available for the object.

IndividualApplicationItemHistory

History is available for tracked fields of the object.

IndividualApplicationItemOwnerSharingRule

Sharing rules are available for the object.

IndividualApplicationItemShare

Sharing is available for the object.

IndividualHistory

Represents the history of changes to values in the fields of a data privacy record, based on the Individual object. This object is available in versions 42.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Special Access Rules

- This object is available if Data Protection and Privacy is enabled.
- The Individual object isn't available to Customer Community, Partner Community, and Customer Portal users.

Fields

Field Name	Details
<code>DataType</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Data type of the field that was changed.
<code>Field</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The name of the changed field.
<code>IndividualId</code>	Type reference Properties Filter, Group, Sort Description ID of the data privacy record. Label is Individual ID . This is a relationship field. Relationship Name Individual

Field Name	Details
	Relationship Type Lookup
	Refers To Individual
NewValue	Type anyType
	Properties Nillable, Sort
	Description The updated value of the changed field.
OldValue	Type anyType
	Properties Nillable, Sort
	Description The previous value of the changed field.

Usage

Use this object to identify changes to data privacy records.

This object respects field-level security on the parent object.

IndividualShare

Represents a list of access levels to a data privacy record along with an explanation of the access level. For example, if you have access to a record because you own it, the `IndividualAccessLevel` is `All` and `RowCause` is `Owner`. This object is available in API version 42.0 and later.

You can only create, edit, and delete sharing entries for standard objects whose `RowCause` field is set to `Manual`. Sharing entries for standard objects with different `RowCause` values are created as a result of your Salesforce org's sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren't stored at all.



Note: While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it's possible that we'll stop storing certain share records to improve performance. As a best practice, don't create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

- This object is available if Data Protection and Privacy is enabled.
- The Individual object isn't available to Customer Community, Partner Community, and Customer Portal users.

Fields

Field Name	Details
IndividualAccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Level of access that the user or group has to the data privacy record. The possible values include: • Read • Edit • All (Except for create or update.) Set this field to an access level that's higher than your default access level for individuals.
IndividualId	Type reference Properties Create, Filter, Group, Sort Description ID of the Individual associated with this sharing entry. This field isn't available for updates. This is a relationship field. Relationship Name Individual Relationship Type Lookup Refers To Individual
RowCause	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort

Field Name	Details
	Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is <code>Manual</code>. If no value is specified, the field defaults to <code>Manual</code>. All other <code>RowCause</code> values are read-only. After the sharing entry is created, this field can't be edited. Valid values include: <code>Manual</code>—The User or Group has access because a user with "All" access manually shared the data privacy record with them. <code>Owner</code>—The User is the owner of the data privacy record. <code>Rule</code>—The User or Group has access to the data privacy record via an Individual sharing rule. <code>Implicit</code>—The User has access to records owned by high-volume Experience Cloud site users via a share group.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the User or Group that has been given access to the data privacy record. This field isn't available for updates. This is a polymorphic relationship field. Relationship Name UserOrGroup Relationship Type Lookup Refers To Group, User

Usage

This object lets you determine which users and groups can view or edit Individual records owned by other users.

InsufficientAccessEventLog

Insufficient Access event logs contain details about errors relating to insufficient account, case, contact, and opportunity record access. This object is available in API version 61.0 and later.

 **Note:** This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

 **Note:** The Insufficient Access event type is disabled by default. You can enable this event type for a period of 24 hours by contacting Salesforce Customer Support.

These insufficient access error scenarios are logged:

- The user can't share a case, contact, or opportunity because the user doesn't have permission to share the parent account or the recipient of the share doesn't currently have read access to the parent account.
- The user can't change ownership of a case, contact, or opportunity because the user doesn't have permission to share the parent account or the new owner doesn't currently have read access to the parent account.
- The user can't change the parent account of a case, contact, or opportunity because the user doesn't have permission to share the new parent account or the owner of the case, contact, or opportunity doesn't have read access to the new parent account.

Insufficient access errors resulting from bulk operations involving two or more records aren't logged.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
<code>AccessError</code>	Type String Description The type of insufficient access error that the user received. Valid values are: • <code>DATA_NOT_AVAILABLE</code>—The record is no longer accessible. For example, a record was deleted and moved to the Recycle Bin. • <code>INVALID_TYPE</code>—The record type doesn't exist. • <code>NO_ACCESS</code>—The user doesn't have the required access level to complete the attempted action on the record. Example <code>NO_ACCESS</code>
<code>ActualLoggedInUserIdentifier</code>	Type Id Description The ID of the user who initiated the action that caused the insufficient access error. For example, a user attempts to transfer ownership of a record to a teammate, but the operation fails because the teammate doesn't have the required access. Example <code>005XXXXXXXXXXXXX</code>
<code>ErrorDescription</code>	Type String

Field	Details
	Description Description of the insufficient access error that the user received. Example User 005XXXXXXXXXXXX doesn't have full access for the record 001XXXXXXXXXXXX.
ObjectType	Type string Properties Filter, Group, Nillable, Sort Description The object for which the user received the insufficient access error.
RecordIdentifier	Type String Description The ID of the record that the user doesn't have access to. Example 001XXXXXXXXXXXX
RequestIdentifier	Type String Description The unique ID of a single transaction. A transaction can contain one or more events. Example 3nWgxWbDKWWDIk0FKfF5DV
RequestedAccessLevel	Type String Description The access level required by the user's attempted action on the record. Valid values are: • DELETE • FULL • READ • TRANSFER • WRITE Example FULL
Timestamp	Type dateTime

Field	Details
	Description The access time of Salesforce services in GMT. Example 20130715233322.670
UserIdentifier	Type Id Description The ID of the user for whom the insufficient access error occurred, either when the user couldn't access a record, the user couldn't complete an operation, or the user was the intended recipient of a record transfer that failed because the user didn't have the required access. Example 005XXXXXXXXXXXXX

InternalOrganizationUnit

Represents an organization that an Employee belongs to. This object is available in API version 48.0 and later. In API version 49.0 and later, this object supports reports, criteria-based sharing rules, and history tracking, plus you can exclude individual fields from custom page layouts.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access this object, you have either a Workplace Command Center permission set license and the Provides access to Workplace Command Center features system permission, or the Employee Management and Employee User add-on licenses. This object is also available with the Referral Marketing license.

Fields

Field	Details
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description A description of the organization the Employee is working in.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
OrganizationCode	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. The code of the organization the Employee is working in.
OrganizationName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the organization the Employee is working in.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who currently owns this record. Default value is the user logged in to the API to perform the create operation.
ParentOrganizationId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description A reference to the parent organization.
Type	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies whether the record is for an internal or an external organization. This field is available in API version 60.0 and later. Possible values are: - EXTERNAL_BUSINESS_UNIT - INTERNAL_ORGANIZATION

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

InternalOrganizationUnitHistory (API version 49.0)

History is available for tracked fields of the object.

InternalOrganizationUnitOwnerSharingRule

Sharing rules are available for the object.

InternalOrganizationUnitShare (API version 49.0)

Sharing is available for the object.

SEE ALSO:

[Workplace Command Center for Work.com Developer Guide: Extend Work.com with Custom Solutions](#)

InventoryItemReservation

Used to store inventory item reservation information for a specific product and location. This object is available in API version 60.0 and later.

Supported Calls

```
create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), undelete(), update(), upsert()
```

Special Access Rules

This object is available only if a B2B Commerce, D2C Commerce, B2C Commerce or Salesforce Order Management license is enabled.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. ISO code for the currency of the inventory items. Possible values are: • EUR—Euro • USD—U.S. Dollar The default value is USD.
ErrorCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The error code if the reservation isn't successful.
ErrorMessage	Type textarea Properties Create, Nillable, Update Description If an error occurred, this field contains the error message.
InventoryItemReservationName	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the inventory item reservation (autogenerated, for example: PIR-0033).
InventoryReservationId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort Description The ID of the inventory reservation. This field is a relationship field. Relationship Name InventoryReservation Relationship Type Lookup Refers To InventoryReservation
ItemReservationSourceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the entity associated with the inventory item reservation. This field is a relationship field. Relationship Name ItemReservationSource Relationship Type Lookup Refers To CartItem
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
ProductId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the product on the inventory item reservation. This field is unique within your organization. This field is a relationship field. Relationship Name Product Relationship Type Lookup Refers To Product2
Quantity	Type double Properties Create, Filter, Sort, Update Description Number of products on the inventory item reservation.
ReservedAtLocationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The location or location group where the inventory item reservation originated. This field is a polymorphic relationship field. Relationship Name ReservedAtLocation Relationship Type Lookup Refers To Location, LocationGroup

Field	Details
StockKeepingUnit	Type string Properties Create, Filter, Group, Nillable, Sort Description The stock keeping unit (SKU) of the reserved item.

InventoryReservation

Stores information about the status of cart inventory reservations in B2B and D2C Commerce. This object is available in API version 60.0 and later.

This object only applies to cart inventory reservation APIs in B2B and D2C Commerce. It isn't related to inventory reservation Connect APIs used with Omnichannel Inventory and Order Management.

If your org is using Omnichannel Inventory as its inventory system, the inventory reservation record related to the cart also represents a reservation in Omnichannel Inventory. If the org uses a different inventory system, the inventory reservation record related to the cart represents a reservation in that inventory system.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available only if a B2B Commerce, D2C Commerce, B2C Commerce, or Salesforce Order Management license is enabled.

Fields

Field	Details
ErrorCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The error code if the reservation isn't successful.
ErrorMessage	Type textarea Properties Create, Nillable, Update

Field	Details
	Description If an error occurred, this field contains the error message.
InventoryReservationName	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the inventory reservation (autogenerated, for example: PIR-0033).
IsAsyncOperationInProgress	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if there's an async operation in progress that could affect the reservation. The default value is <code>false</code> .
IsSuccess	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the most recent inventory system operation was successful. The default value is <code>false</code> .
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last viewed this record or list view. If this value is null, the user could have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The user who owns the inventory reservation. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ReservationDate	Type dateTime Properties Create, Filter, Sort, Update Description The timestamp when the inventory reservation was created.
ReservationDurationInSeconds	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The total duration of the inventory reservation in seconds.
ReservationIdentifier	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The unique identifier (text value) for the reservation.

Field	Details
ReservationSourceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the entity associated with the inventory reservation. This field is a polymorphic relationship field. Relationship Name ReservationSource Relationship Type Lookup Refers To Export_FOI__c, WebCart

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[InventoryReservationOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[InventoryReservationShare](#) on page 67

Sharing is available for the object.

InvocableActionEventLog

Invocable Action events capture the calls to Salesforce Invocable Actions. This is particularly useful to monitor actions invoked during Agentforce flows. This object is available in API version 64.0 and later.



Note: This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
ActionName	Type string Properties Filter, Group, Nillable, Sort Description Name of the action.
ActionType	Type string Properties Filter, Group, Nillable, Sort Description InvokableActionType being referenced.
ActionVersion	Type string Properties Filter, Group, Nillable, Sort Description The invocable action version.
ApiCaller	Type string Properties Filter, Group, Nillable, Sort Description Identifier of the API caller. This is only populated when the action is invoked from a REST API call
BotIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the bot.
BotSessionIdentifier	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The bot session ID.
Duration	Type double Properties Filter, Nillable, Sort Description Time (in nanos) taken to process this set of requests.
FlowProcessType	Type string Properties Filter, Group, Nillable, Sort Description The process type of the calling flow.
FlowVersionIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the version of the calling flow.
PlannerIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the agent planner.
RequestCount	Type int Properties Filter, Group, Nillable, Sort Description The number of invoked requests.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description ID of the user employing salesforce.com services, whether through the user interface or API.

Invoice

Represents a financial document describing the total amount a buyer must pay for goods or services provided. This object is available in API version 48.0 and later.

Users can edit non-posted invoices. Posted invoices can't be deleted. After an invoice is posted, users can make payments against it to reduce its balance.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`

Special Access Rules

This object is available with Salesforce Order Management or D2C Commerce license, and Billing (Revenue Cloud). A few fields require Commerce Subscriptions to be enabled. These fields are available only in Lightning Experience.

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
Balance	Type currency Properties Filter, Nillable, Sort Description The outstanding balance for this invoice. Equal to the invoice's total amount with tax, ignoring payments and adjustments.
BillToContactId	Type reference Properties Filter, Group, Nillable, Sort, Update Description Inherited from the account's Bill to Account. This field is a relationship field. Relationship Name BillToContact Relationship Type Lookup Refers To Contact
BillingAccountId	Type reference Properties Filter, Group, Sort, Update Description The customer account for this invoice. This field is a relationship field. Relationship Name BillingAccount Relationship Type Lookup Refers To Account
CurrencyIsoCode	Type picklist

Field	Details
	Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The three-letter ISO 4217 currency code associated with the invoice. The default value is <code>USD</code>. This field is available in API version 55.0 and later.
DaysInvoiceOpen	Type int Properties Filter, Group, Nillable, Sort Description Number of days since the invoice was created before it was paid. This field is a calculated field. This field is available in API version 55.0 and later.
DaysInvoiceOverdue	Type int Properties Filter, Group, Nillable, Sort Description Number of days since the date when payment was due. This field is a calculated field. This field is available in API version 55.0 and later.
Description	Type string Properties Filter, Group, Nillable, Sort, Update Description Users can add more information about this invoice. Maximum of 1,000 characters.
DocumentNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The system-generated number that is used to organize financial documents. The number can be sequential or random.

Field	Details
DueDate	Type date Properties Filter, Group, Sort, Update Description The customer must pay the invoice by the due date. Unpaid invoices past the due date can be sent to collections.
FullSettlementDate	Type date Properties Filter, Group, Nillable, Sort Description Date when the invoice is paid in full. This field is available in API version 55.0 and later.
InvoiceBatchRunId	Type reference Properties Filter, Group, Nillable, Sort Description Id of the invoice batch run that generated this invoice. This field is a relationship field. This field is available in API version 55.0 and later. Relationship Name InvoiceBatchRun Relationship Type Lookup Refers To InvoiceBatchRun
InvoiceDate	Type date Properties Filter, Group, Sort, Update Description The date that the invoice was posted. Used with payment terms to determine the invoice's DueDate. For example, an invoice with an InvoiceDate of 04/01 and Net 30 payment terms has a DueDate of 05/01.

Field	Details
InvoiceNumber	Type string Properties Filter, Group, Nillable, Sort, Update Description System-created unique ID for this invoice.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view. This field is available in API version 55.0 and later.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view. If this value is null, it's possible the user accessed this record or list view (<code>LastReferencedDate</code>) but didn't view it. This field is available in API version 55.0 and later.
NetCreditsApplied	Type currency Properties Filter, Nillable, Sort Description Represents the net credits applied to an invoice. Calculated by subtracting the sum of all unapplied lines from the sum of all applied lines. This field is a calculated field. This field is available in API version 55.0 and later.
NetPaymentsApplied	Type currency Properties Filter, Nillable, Sort

Field	Details
	Description Represents net payments applied to an invoice. Calculated by subtracting the sum of unapplied payments from the sum of payments applied to the invoice. This field is a calculated field. This field is available in API version 55.0 and later.
OwnerId	Type reference Properties Filter, Group, Sort, Update Description The user who owns an invoice record. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PaymentExclusionReason	Type string Properties Filter, Group, Nillable, Sort Description The reason for skipping creation of payment schedules and payment schedule items for the invoice. This field is only available if Commerce Subscriptions is enabled for your org. Available in API version 63.0 and later.
PaymentTermId	Type reference Properties Filter, Group, Nillable, Sort, Update Description ID of the payment term used on this invoice. This field is a relationship field. This field is available in API version 55.0 and later. Relationship Name PaymentTerm Relationship Type Lookup Refers To PaymentTerm

Field	Details
PostedDate	Type date Properties Filter, Group, Nillable, Sort Description The date the invoice was posted. This field is available in API version 60.0 and later.
ReferenceEntityId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The ID of the order or order summary that created this invoice. This field is a polymorphic relationship field. Relationship Name ReferenceEntity Relationship Type Lookup Refers To Order, OrderSummary
SettlementStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The state of the invoice's payment. Possible values are: • Not Applicable • Not Settled • Partially Settled • Settled This field is available when Subscription Management is enabled. This field is available in API version 55.0 and later.
ShouldExcludePayment	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Required. Indicates whether to skip creating payment schedules and payment schedule items for the invoice (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>. This field is only available if Commerce Subscriptions is enabled for your org. Available in API Version 63.0 and later.
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The state of the invoice. Possible values are: • Canceled— Indicates that the invoice was generated and later canceled. • Draft— Indicates that the invoice is a draft. Available in API version 60.0 and later. • Draft In Progress— Indicates that the draft invoice is in progress. Available in API version 60.0 and later. • Error— Indicates that an error occurred when processing the invoice. • Pending— Indicates that the invoice is being processed. • Posted— Indicates that the invoice has been generated and sent to the customer. • Posting In Progress— Indicates that the invoice posting is in progress. Available in API version 60.0 and later. • Void In Progress— Indicates that the invoice is pending a status change. • Voided— The invoice's status after the API successfully voids the invoice.
TaxLocaleType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort, Update Description The system used to handle tax on the original Order associated with the Invoice. Gross usually applies to taxes like value-added tax (VAT), and Net usually applies to taxes like sales tax. This field is available when Order Management or B2B Commerce is enabled. Possible values are: • Gross: Displays most prices and taxes as combined values • Net: Displays most prices and taxes as separate values This field is available in API version 56.0 and later.
TotalAdjustmentAmount	Type currency

Field	Details
	Properties Filter, Nillable, Sort Description The sum of the invoice's adjustment line amounts.
TotalAdjustmentAmountWithTax	Type currency Properties Filter, Nillable, Sort Description The sum of the amount fields on the invoice's adjustment-type invoice lines, including tax. This field is available in API version 55.0 and later.
TotalAdjustmentTaxAmount	Type currency Properties Filter, Nillable, Sort Description The total amount of tax applied to the invoice line's adjustment lines. This field is available in API version 55.0 and later.
TotalAmount	Type currency Properties Filter, Nillable, Sort Description The sum TotalAmount values on the invoice's lines. This field is a calculated field.
TotalAmountWithTax	Type currency Properties Filter, Nillable, Sort Description The sum of TotalAmountWithTax values on the invoice's lines.
TotalChargeAmount	Type currency Properties Filter, Nillable, Sort

Field	Details
	Description The sum of the invoice's charges. This field is a calculated field.
TotalChargeAmountWithTax	Type currency Properties Filter, Nillable, Sort Description The sum of the amount fields on the invoice's charge-type invoice lines, including tax. This field is available in API version 55.0 and later.
TotalChargeTaxAmount	Type currency Properties Filter, Nillable, Sort Description The total amount of tax applied to the invoice's charge lines. This field is available in API version 55.0 and later.
TotalConvertedNegAmount	Type currency Properties Filter, Nillable, Sort Description The sum of all negative invoice lines that were converted to a credit memo. For example, if one negative invoice line was for -\$10 and one was for -\$15, the total amount that's converted to a credit memo is -\$25. This field is a calculated field. This field is available when Subscription Management is enabled. This field is available in API version 56.0 and later.
TotalTaxAmount	Type currency Properties Filter, Nillable, Sort Description The sum of TaxAmount values on the invoice lines. This field is a calculated field.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

InvoiceFeed on page 55

Feed tracking is available for the object.

InvoiceHistory on page 63

History is available for tracked fields of the object.

InvoiceOwnerSharingRule on page 65

Sharing rules are available for the object.

InvoiceShare on page 67

Sharing is available for the object.

InvoiceAddressGroup

Stores the buyer's address information. This object is available in API version 50.0 and later.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
Address	Type address Properties Filter, Nillable Description Buyer's address. Compound field that summarizes the invoice address group's address component fields.
City	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The buyer's city.
Country	Type string Properties Filter, Group, Nillable, Sort Description The buyer's country.
GeocodeAccuracy	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The accuracy rating for the geocode of the address group. The accuracy rating contains information about the location of a latitude and longitude.
InvoiceAddressGroupNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-generated number, such as DOC-000001.
InvoiceId	Type reference Properties Filter, Group, Sort Description ID of the invoice associated with the address group. This field is a relationship field. Relationship Name Invoice Relationship Type Lookup Refers To Invoice
Latitude	Type double

Field	Details
	Properties Filter, Nillable, Sort Description The buyer's latitude.
Longitude	Type double Properties Filter, Nillable, Sort Description The buyer's longitude.
PostalCode	Type string Properties Filter, Group, Nillable, Sort Description The buyer's postal code or ZIP code.
State	Type string Properties Filter, Group, Nillable, Sort Description The buyer's state.
Street	Type textarea Properties Filter, Group, Nillable, Sort Description The buyer's street.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[InvoiceAddressGroupHistory](#) on page 63

History is available for tracked fields of the object.

InvoiceBatchRun

Represents a batch processing job in Subscription Management or Billing (Revenue Cloud). During an invoice batch run, all billing schedules that meet the specified criteria are processed, resulting in the generation of invoices. This object is available in API version 55.0 and later.

An invoice batch run, controlled by a scheduler, tells the system to start the run at a scheduled date and time. The scheduler also includes matching criteria, which are used to evaluate the billing schedules. Billing schedules that meet the specified criteria are included for processing in the invoice batch run.

When an invoice batch run is started, Subscription Management or Billing (Revenue Cloud):

- Evaluates the billing schedule to see if it meets the criteria for inclusion in the batch invoice run.
- Generates an invoice record with a pending state.
- Makes calls to an external tax provider.
- Adds the tax to the invoice.
- Summarizes information about the billing schedules that were included in the invoice batch run and displays this information in the Invoice Batch Run record.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
BillingBatchSchedulerId	Type reference Properties Filter, Group, Sort Description The ID of the related billing batch scheduler. This field is a relationship field. Relationship Name BillingBatchScheduler Relationship Type Lookup

Field	Details
	Refers To BillingBatchScheduler
Comments	Type textarea Properties Filter, Nillable, Sort, Update Description Optional user-defined information about the scheduler.
CompletionTime	Type dateTime Properties Filter, Nillable, Sort Description Timestamp when the invoice batch run finished processing.
InvoiceBatchRunNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description System-generated sequential number.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the invoice batch run was last modified. Its UI label is Last Modified Date.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the invoice batch run was last viewed.
OwnerId	Type reference

Field	Details
	Properties Filter, Group, Sort, Update Description System-generated field. The ID of the user who created the BillingBatchScheduler record. Its UI label is Owner. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
RecoveryStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the state of the invoice batch run recovery process. This field is available in API version 56.0 and later. Possible values are: • CompletelyRecovered—All billing schedules included in the recovery run were reset to <i>Ready for Invoicing</i>. These billing schedules are included in the next scheduled invoice batch run. • PartiallyRecovered—Some, but not all, billing schedules that were part of the recovery run were reset to <i>Ready for Invoicing</i>. The billing schedules that were recovered are included in the next scheduled invoice batch run. The billing schedules that weren't successfully recovered must be manually reset to <i>Ready for Invoicing</i> so they can be processed. • RecoveryFailed—The recovery job was unsuccessful. This value is available in API version 57.0 and later. • RecoveryStarted—The recovery job is in process.
StartTime	Type dateTime Properties Filter, Sort Description Timestamp when the invoice batch run started processing.
Status	Type picklist

Field	Details
	Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The state of the invoice batch run. Possible values are: • Canceled—This value is available in API version 57.0 and later. • Completed • Failed • Started • Stopped—This value is available in API version 57.0 and later. The default value is Started.
TotalBillSchedRecovered	Type int Properties Filter, Group, Nillable, Sort Description The number of billing schedules that were part of the recovery run that were reset to <i>Ready for Invoicing</i>. These billing schedules are included in the next scheduled invoice batch run. This field is available in API version 57.0 and later.
TotalBillSchedUnrecovered	Type int Properties Filter, Group, Nillable, Sort Description The number of billing schedules that were part of the recovery run that weren't reset to <i>Ready for Invoicing</i>. These billing schedules that weren't successfully recovered must be manually reset to <i>Ready for Invoicing</i> so they can be processed. This field is available in API version 57.0 and later.
TotalBillingSchedulesFailed	Type int Properties Filter, Group, Nillable, Sort Description The total number of billing schedules that weren't successfully processed. When a billing schedule isn't successfully processed, then the system doesn't generate an invoice for it. For details about errors, check the Revenue Transaction Error Log. This field is available in API version 56.0 and later.

Field	Details
TotalBsSuccessfullyProcessed	Type int Properties Filter, Group, Nillable, Sort Description The total number of billing schedules for which the system was able to generate and process invoices. This field is available in API version 56.0 and later.
TotalDraftInvoiceAmount	Type currency Properties Filter, Nillable, Sort Description The sum of the invoice amounts for invoices in <code>Draft</code> status. This field is available when Billing (Revenue Cloud) is enabled. This field is available in API version 62.0 and later.
TotalDraftInvoices	Type int Properties Filter, Group, Nillable, Sort Description The total number of invoices in <code>Draft</code> status generated in the batch run. This field is available when Billing (Revenue Cloud) is enabled. This field is available in API version 62.0 and later.
TotalFilteredBillingSchedules	Type int Properties Filter, Group, Nillable, Sort Description The total number of billing schedules that met the invoice run scheduler's matching criteria. The matching criteria specify which billing schedules are included in the invoice batch run. Its field label is Total Matching Billing Schedules. This field is available in API version 56.0 and later.
TotalInvSuccessfullyProcessed	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The total number of invoices that were successfully processed. When Billing (Revenue Cloud) is enabled, the field's value is either the same as <code>TotalPostedInvoices</code> or <code>TotalDraftInvoices</code> based on the Invoice Status selected when the Invoice Scheduler is set up. This field is available in API version 56.0 and later.
<code>TotalInvoicedAmount</code>	Type currency Properties Filter, Nillable, Sort Description The total amount of income including taxes represented by the successfully processed invoices. This field is available in API version 56.0 and later.
<code>TotalInvoicesCanceled</code>	Type int Properties Filter, Group, Nillable, Sort Description The total number of invoices that weren't processed. To find out what went wrong, check the Revenue Transaction Error Log. Fix the errors, then run the invoice batch run recovery process. This field is available in API version 57.0 and later.
<code>TotalInvoicesFailed</code>	Type int Properties Filter, Group, Nillable, Sort Description The total number of invoices that weren't processed successfully. To find out what went wrong, check the Revenue Transaction Error Log. Then fix the errors and run the invoice batch run recovery process. This field is available in API version 56.0 and later.
<code>TotalInvoicesGenerated</code>	Type int Properties Filter, Group, Nillable, Sort Description The total number of invoices that were generated from the billing schedules processed by the invoice batch run. This field is available in API version 56.0 and later.

Field	Details
TotalPostedInvoices	Type int Properties Filter, Group, Nillable, Sort Description The total number of invoices in <code>Posted</code> status generated during the batch run. This field is available when Billing (Revenue Cloud) is enabled. This field is available in API version 62.0 and later.
TotBillSchdUpdtDurDrftToPost	Type int Properties Filter, Group, Nillable, Sort Description The total billing schedules updated during the draft to posted run. This field is available when Billing (Revenue Cloud) is enabled. This field is available in API version 62.0 and later.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

InvoiceBatchRunChangeEvent on page 68

Change events are available for the object.

InvoiceBatchRunFeed on page 55

Feed tracking is available for the object.

InvoiceBatchRunHistory on page 63

History is available for tracked fields of the object.

InvoiceBatchRunOwnerSharingRule on page 65

Sharing rules are available for the object.

InvoiceBatchRunShare on page 67

Sharing is available for the object.

InvoiceBatchRunCriteria

Represents a batch processing job and its required criteria in Subscription Management. During an invoice batch run, all billing schedules that meet the specified criteria are processed, resulting in the generation of invoices. This object is available in API version 55.0 and later.

A scheduled invoice batch run tells the system to start the run at a scheduled date and time by using certain criteria. The scheduler includes the matching criteria, which are used to evaluate the billing schedules. Billing schedules that meet the specified criteria are included for processing in the invoice batch run.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
Comments	Type textarea Properties Filter, Nillable, Sort Description Optional user-defined information about the batch run criteria.
CriteriaExpression	Type textarea Properties Filter, Nillable, Sort Description The formula that specifies criteria for filtering the billing schedules. For example, we can filter billing schedules by currency code.
CriteriaMatchType	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The type of matching criteria required for the batch. Valid value is <code>MatchAll</code>. The default value is <code>MatchAll</code>.
ExpectedInvoiceStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description The type of invoice a batch run generates. Valid values are: • Draft • Posted This field is available in API version 60.0 and later.
InvoiceBatchRunCriteriaNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description System-generated sequential number.
OwnerId	Type reference Properties Filter, Group, Sort Description System-generated field. The ID of the user who created the BillingBatchScheduler record. Its UI label is Owner. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

InvoiceBatchRunRecovery

Provides information about an invoice batch run recovery procedure. This object is available in API version 57.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
Comments	Type textarea Properties Filter, Nillable, Sort, Update Description Optional user-defined information about the scheduler.
CompletionTime	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the invoice batch run recovery procedure was completed.
InvoiceBatchRunId	Type reference Properties Filter, Group, Sort Description The unique identifier of the invoice batch run related to this recovery run. This field is a relationship field. Relationship Name InvoiceBatchRun Relationship Type Lookup Refers To InvoiceBatchRun
InvoiceBatchRunRecoveryNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The unique identifier of the invoice batch run recovery process.

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user indirectly accessed this record (LastReferencedDate), but did not view it.
StartTime	Type dateTime Properties Filter, Sort Description The timestamp when the invoice batch run recovery started.
Status	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The final state of the invoice batch run recovery process. Possible values are: • Completed—The recovery run successfully reset all billing schedules to <i>Ready for Invoicing</i>. • CompletedWithErrors—Some, but not all, billing schedules included in the recovery run were reset to <i>Ready for Invoicing</i>. The billing schedules that were recovered are included in the next scheduled invoice batch run. The billing schedules that weren't successfully recovered must be manually reset to <i>Ready for Invoicing</i> so they can be processed. • Failed—The recovery run was unable to complete the reset process. • Started—Indicates that the recovery run reset process began, is ongoing, and has not yet produced a result. The default value is <i>Started</i>.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

InvoiceBatchRunRecoveryChangeEvent on page 68

Change events are available for the object.

InvoiceBatchRunRecoveryFeed on page 55

Feed tracking is available for the object.

InvoiceBatchRunRecoveryHistory on page 63

History is available for tracked fields of the object.

InvoiceBatchRunRecoveryOwnerSharingRule on page 65

Sharing rules are available for the object.

InvoiceBatchRunRecoveryShare on page 67

Sharing is available for the object.

InvoiceDocument

Tracks and displays the status of documents generated for invoices. Invoice documents are available in the related lists of invoice entity records. This object is available in API version 61.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Special Access Rules

This object is available with Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
ContentDocumentId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the generated PDF document. This field is a relationship field. Relationship Name ContentDocument

Field	Details
	Refers To ContentDocument
DateGenerated	Type date Properties Filter, Group, Nillable, Sort Description The date on which the PDF is generated.
DocumentGenerationProcessId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the entity that contains the information used to create the PDF invoice. This field is a relationship field. Relationship Name DocumentGenerationProcess Refers To DocumentGenerationProcess
DocumentNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The ID of the generated document.
ErrorMessage	Type string Properties Filter, Group, Nillable, Sort Description Errors that occur during PDF generation.
InvoiceId	Type reference Properties Filter, Group, Sort

Field	Details
	Description The ID of the invoice entity to which the invoice document is attached. This field is a relationship field. Relationship Name Invoice Relationship Type Master-detail Refers To Invoice (the master object)
Status	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The status of the PDF generation process. Possible values are: • Blocked • Cancelled • Failure • Pending • Success

InvoiceLine

Represents the amount that a buyer must pay for a product, service, or fee. Invoice lines are created based on the amount of an order line. This object is available in API version 48.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`

Special Access Rules

This object is available with Order Management, Subscription Management, and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
AdjustmentAmount	Type currency Properties Filter, Nillable, Sort Description Sum of adjustments made to the invoice line.
AdjustmentAmountWithTax	Type currency Properties Filter, Nillable, Sort Description Sum of adjustment amounts, including associated taxes related to the invoice line.
AdjustmentTaxAmount	Type currency Properties Filter, Nillable, Sort Description Sum of tax adjustments to the invoice line. This field is available in API version 55.0 and later.
Balance	Type currency Properties Filter, Nillable, Sort Description The outstanding balance for an invoice line. This is equal to the invoice's total amount with tax after deducting the payments made.
BillingAddressId	Type reference Properties Filter, Group, Nillable, Sort Description Lookup field to an InvoiceAddressGroup containing the billing address for the invoice line. Assign one InvoiceAddressGroup to the invoiceLine's BillingAddressID, and another InvoiceAddressGroup to the invoiceLine's ShippingAddressId. This field is a relationship field. This field is available in API version 55.0 and later.

Field	Details
	Relationship Name BillingAddress
	Relationship Type Lookup
	Refers To InvoiceAddressGroup
BillingScheduleGroupId	Type reference
	Properties Filter, Group, Nillable, Sort, Update
	Description This field is a relationship field.
	Relationship Name BillingScheduleGroup
	Refers To BillingScheduleGroup
BillingScheduleId	Type reference
	Properties Filter, Group, Nillable, Sort, Update
	Description ID of the billing schedule for the invoice line. This field is a relationship field. This field is available in API version 55.0 and later.
	Relationship Name BillingSchedule
	Relationship Type Lookup
	Refers To BillingSchedule
ChargeAmount	Type currency
	Properties Filter, Nillable, Sort, Update
	Description Sum of charges made to the invoice line.
ChargeAmountWithTax	Type currency

Field	Details
	Properties Filter, Nillable, Sort Description Amount on a charge invoice line, including tax. This field is available in API version 55.0 and later.
ChargeTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax to be applied on a charge invoice line. This field is available in API version 55.0 and later.
ConvertedNegAmount	Type currency Properties Filter, Nillable, Sort Description The amount from an invoice line that is converted to credit. This field is available in API version 56.0 and later.
Description	Type string Properties Filter, Group, Nillable, Sort, Update Description Description of the invoice line.
GroupReferenceEntityItemId	Type reference Properties Filter, Group, Nillable, Sort, Update Description Grouping field for adjustment line items. This field is a polymorphic relationship field. Relationship Name GroupReferenceEntityItem Relationship Type Lookup

Field	Details
	Refers To OrderItem, OrderItemAdjustmentLineItem
HasMultipleItems	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this field merges items from the same billing period. The default value is <code>false</code> .
InvoiceId	Type reference Properties Filter, Group, Sort Description The invoice that contains this invoice line. This field is a relationship field. Relationship Name Invoice Relationship Type Lookup Refers To Invoice
InvoiceLineEndDate	Type date Properties Filter, Group, Sort, Update Description For invoice lines made from a time-based service, the end date of the billing for the service.
InvoiceLineStartDate	Type date Properties Filter, Group, Sort, Update Description For invoice lines made from a time-based service, the first date of the billing for the service.
InvoiceStatus	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description State of the invoice line. Inherited from the invoice's status.
LegalEntityAccountingPeriodId	Type reference Properties Filter, Group, Nillable, Sort, Update Description This field is a relationship field. Relationship Name LegalEntityAccountingPeriod Refers To LegalEntyAccountingPeriod
LegalEntityId	Type reference Properties Filter, Group, Nillable, Sort, Update Description This field is a relationship field. Relationship Name LegalEntity Refers To LegalEntity
LineAmount	Type currency Properties Filter, Nillable, Sort Description The amount of the invoice line. This field is a calculated field. This field is available in API version 55.0 and later.
Name	Type string Properties Filter, Group, idLookup, Sort, Update Description Name of the invoice line.

Field	Details
NetCreditsApplied	Type currency Properties Filter, Nillable, Sort Description The total credit memo line amount applied to the invoice line. This amount is calculated by subtracting the unapplied credit memo line amount from the applied credit memo line amount. This field is a calculated field.
NetPaymentsApplied	Type currency Properties Filter, Nillable, Sort Description The total payment applied to the invoice line. This amount is calculated by subtracting the unapplied payment amount from the applied payment amount. This field is a calculated field.
Product2Id	Type reference Properties Filter, Group, Nillable, Sort, Update Description The product that was charged or ordered to create the invoice line. This field is a relationship field. Relationship Name Product2 Relationship Type Lookup Refers To Product2
Quantity	Type double Properties Filter, Nillable, Sort, Update Description Number of units of the order product that created the invoice line.

Field	Details
ReferenceEntityItemId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The order item or adjustment item that created the invoice line. This field is a polymorphic relationship field. Relationship Name ReferenceEntityItem Relationship Type Lookup Refers To OrderItem, OrderItemAdjustmentLineItem
ReferenceEntityType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of transaction that created the invoice line. Possible values are: • DeliveryCharge—Charge • Fee—Charge. This value is available in API version 56.0 and later. • OrderProduct—Product
ReferenceEntityTypeCode	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of object that created the invoice line. Possible values are: • Charge • Product
RelatedLineId	Type reference Properties Filter, Group, Nillable, Sort, Update

Field	Details
	Description The original invoice line that was adjusted or taxed. This field is a relationship field. Relationship Name RelatedLine Relationship Type Lookup Refers To InvoiceLine
ShippingAddressId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the shipping address associated with the invoice line. This field is a relationship field. This field is available in API version 55.0 and later. Relationship Name ShippingAddress Relationship Type Lookup Refers To InvoiceAddressGroup
TaxAmount	Type currency Properties Filter, Nillable, Sort, Update Description Total tax for the invoice line.
TaxCode	Type string Properties Filter, Group, Nillable, Sort, Update Description The code used to calculate tax rate for the invoice line.
TaxDocumentNumber	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description Represents the latest record in the external tax engine in which this invoice line item is included. This field is available in API version 55.0 and later.
TaxEffectiveDate	Type date Properties Filter, Group, Nillable, Sort, Update Description The date used to calculate the invoice line's TaxAmount.
TaxName	Type string Properties Filter, Group, Nillable, Sort, Update Description User-defined name for the applied tax.
TaxRate	Type percent Properties Filter, Nillable, Sort, Update Description Percentage value used for calculating tax.
TaxTransactionNumber	Type string Properties Filter, Group, Nillable, Sort Description Represents the transaction in the external tax engine in which the taxes for the line were calculated for the invoice line. This field is available in API version 55.0 and later.
TaxTreatmentId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description The tax treatment used on this invoice line. This field is a relationship field. This field is available in API version 55.0 and later. Relationship Name TaxTreatment Relationship Type Lookup Refers To TaxTreatment
Type	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Shows the type of transaction for the invoice line. Possible values are: • Adjustment • Charge • Tax
UnitPrice	Type currency Properties Filter, Nillable, Sort, Update Description Price for one unit of the item on the invoice line.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[InvoiceLineFeed](#) on page 55

Feed tracking is available for the object.

[InvoiceLineHistory](#) on page 63

History is available for tracked fields of the object.

[InvoiceLineOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[InvoiceLineShare](#) on page 67

Sharing is available for the object.

JobProfile

Represents a job profile used for shift scheduling. This object is available in API versions 47.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service or Workforce Engagement must be enabled.

Fields

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the current user last viewed a related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the current user last viewed this record.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the job profile.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description The ID of the owner of the job profile.

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

[JobProfileFeed](#)

Feed tracking is available for the object.

[JobProfileHistory](#)

History is available for tracked fields of the object.

[JobProfileOwnerSharingRule](#)

Sharing rules are available for the object.

[JobProfileShare](#)

Sharing is available for the object.

JobProfileQueueGroup

JobProfileQueueGroup defines the mapping between Queue and JobProfile and configurations for capacity plans in Workforce Engagement. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Org must have the Workforce Engagement, Workforce Engagement Configuration, and Omni org preferences enabled. User must have the Workforce Engagement Analyst or Planner user permission set.

Fields

Field	Details
AnswerTime	Type int Properties Create, Filter, Group, Sort, Update Description The answer time (in seconds) for a specific group.

Field	Details
CapacityPerJobProfile	Type int Properties Create, Filter, Group, Sort, Update Description The max number of work units that an agent can handle for a specific job profile.
GroupCapacity	Type int Properties Create, Filter, Group, Sort, Update Description The distributed number of work units among groups to which a specific job profile is associated.
GroupId	Type reference Properties Create, Filter, Group, Sort, Update Description Identifies the group or queue record. This is a relationship field. Relationship Name Group Relationship Type Lookup Refers To Group
JobProfileId	Type reference Properties Create, Filter, Group, Sort, Update Description Identifies the job profile record. This is a relationship field. Relationship Name JobProfile Relationship Type Lookup

Field	Details
	Refers To JobProfile
JobProfileShrinkage	Type double Properties Create, Filter, Sort, Update Description The shrinkage for a specific job profile.
Priority	Type int Properties Create, Filter, Group, Sort, Update Description The priority of a group per job profile.
ServiceLevelAgreementPerc	Type double Properties Create, Filter, Sort, Update Description The expected SLA percentage for a specific group.
WorkType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description A type of group, indicating whether a queue is synchronous or asynchronous. Possible values are: • A—Async • S—Sync The default value is 'S'.

Knowledge__Feed

Represents the feed for a knowledge article. This object is available in API version 39.0 and later.

For additional information about feeds, see [FeedItem](#) on page 2549.



Note: By default, the prefix for this object name is `Knowledge` and that is the value shown in this reference. However, this prefix can be modified by changing the **Object Name** for the `Knowledge__kav` object in Object Manager.

Supported Calls

`delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Lightning Knowledge must be enabled in your org.

Fields

Field	Details
<code>BestCommentId</code>	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the comment marked as best answer on a question post.
<code>Body</code>	Type textarea Properties Nillable, Sort Description The body of the feed item. Required when <code>Type</code> is <code>TextPost</code> or <code>AdvancedTextPost</code>. Optional when <code>Type</code> is <code>ContentPost</code> or <code>LinkPost</code>. Although a value for <code>Body</code> is not required for the <code>ContentPost</code> type, an attachment is required. If an attachment isn't present, the type changes to <code>TextPost</code> or <code>AdvancedTextPost</code>, depending on the API version. <code>TextPost</code> and <code>AdvancedTextPost</code> do require a value for <code>Body</code>.  Tip: See the <code>IsRichText</code> field for a list of HTML tags supported in the body of rich text posts.
<code>CommentCount</code>	Type int Properties Filter, Group, Sort Description The number of comments associated with this feed item.

Field	Details
	 Tip: In a feed that supports pre-moderation, <code>CommentCount</code> isn't updated until a comment is published. For example, say that you comment on a post that already has one published comment and your comment triggers moderation. Now there are two comments on the post, but the count says there's only one. In a moderated feed, comments aren't counted until approved by an admin or someone with <code>Can Approve Feed Post and Comment</code> or <code>Modify All Data</code>. Feed moderation has implications on how you retrieve feed comments. In a moderated feed, rather than retrieving comments by looping through <code>CommentCount</code>, go through pagination until the end of comments is returned.
<code>InsertedById</code>	Type reference Properties Group, Nillable, Sort Description ID of the user who added this item to the feed. For example, if an application migrates posts and comments from another application into a feed, the <code>InsertedBy</code> value is set to the ID of the context user.
<code>IsRichText</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the feed item <code>Body</code> contains rich text. If you post a rich text feed comment using SOAP API, set <code>IsRichText</code> to <code>true</code> and escape HTML entities from the body. Otherwise, the post is rendered as plain text. Rich text supports the following HTML tags: • <code><p></code> •  Tip: Though the <code>
</code> tag isn't supported, you can use <code><p>&nbsp;</p></code> to create lines. • <code><a></code> • <code></code> • <code><code></code> • <code><i></code> • <code><u></code> • <code><s></code> • <code></code> • <code></code> • <code></code>

Field	Details
	• <code></code> The <code></code> tag is accessible only through the API and must reference files in Salesforce similar to this example: <code></code>  Note: In API version 35.0 and later, the system replaces special characters in rich text with escaped HTML. In API version 34.0 and prior, all rich text appears as a plain-text representation.
LikeCount	Type int Properties Filter, Group, Sort Description The number of likes associated with this feed item.
LinkUrl	Type url Properties Nillable, Sort Description The URL of a <code>LinkPost</code>.
ParentId	Type reference Properties Filter, Group, Sort Description ID of the Knowledge article to which the feed item is related.
RelatedRecordId	Type reference Properties Group, Nillable, Sort Description ID of the <code>ContentVersion</code> record associated with a <code>ContentPost</code>. For WDC thanks posts, it's the ID of the <code>WorkThanks</code> object associated with a <code>RypplePost</code>. This field is typically null for all posts except <code>ContentPost</code> and <code>RypplePost</code>. For example, set this field to an existing <code>ContentVersion</code> ID and post it to a feed with <code>Type</code> set to <code>ContentPost</code>.
Title	Type string

Field	Details
	Properties Group, Nillable, Sort Description The title of the feed item. When the <code>Type</code> is <code>LinkPost</code>, the <code>LinkUrl</code> is the URL and this field is the link name. The <code>Title</code> field can be updated on posts of <code>Type</code> <code>QuestionPost</code>.
Type	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of feed item. Except for <code>ContentPost</code>, <code>LinkPost</code>, and <code>TextPost</code>, don't create feed items of other types directly from the API. • <code>ActivityEvent</code>—indirectly generated event when a user or the API adds a Task associated with a feed-enabled parent record (excluding email tasks on cases). Also occurs when a user or the API adds or updates a <code>Task</code> or Event associated with a case record (excluding email and call logging). For a recurring <code>Task</code> with <code>CaseFeed</code> disabled, one event is generated for the series only. For a recurring <code>Task</code> with <code>CaseFeed</code> enabled, events are generated for the series and each occurrence. • <code>AdvancedTextPost</code>—created when a user posts a group announcement and, in Lightning Experience as of API version 39.0 and later, when a user shares a post. • <code>AnnouncementPost</code>—Not used. • <code>ApprovalPost</code>—generated when a user submits an approval. • <code>BasicTemplateFeedItem</code>—Not used. • <code>CanvasPost</code>—a post made by a canvas app posted on a feed. • <code>CollaborationGroupCreated</code>—generated when a user creates a public group. • <code>CollaborationGroupUnarchived</code>—Not used. • <code>ContentPost</code>—a post with an attached file. • <code>CreatedRecordEvent</code>—generated when a user creates a record from the publisher. • <code>DashboardComponentAlert</code>—generated when a dashboard metric or gauge exceeds a user-defined threshold. • <code>DashboardComponentSnapshot</code>—created when a user posts a dashboard snapshot on a feed. • <code>LinkPost</code>—a post with an attached URL. • <code>PollPost</code>—a poll posted on a feed. • <code>ProfileSkillPost</code>—generated when a skill is added to a user's Chatter profile. • <code>QuestionPost</code>—generated when a user posts a question. • <code>ReplyPost</code>—generated when Chatter Answers posts a reply.

Field	Details
	• <code>RypplePost</code>—generated when a user creates a Thanks badge in WDC. • <code>TextPost</code>—a direct text entry on a feed. • <code>TrackedChange</code>—a change or group of changes to a tracked field. • <code>UserStatus</code>—automatically generated when a user adds a post. Deprecated. The following values appear in the <code>Type</code> picklist for all feed objects but apply only to <code>CaseFeed</code>: • <code>AttachArticleEvent</code>—generated event when a user attaches an article to a case. • <code>CallLogPost</code>—generated event when a user logs a call for a case through the user interface. CTI calls also generate this event. • <code>CaseCommentPost</code>—generated event when a user adds a case comment for a case object. • <code>ChangeStatusPost</code>—generated event when a user changes the status of a case. • <code>ChatTranscriptPost</code>—generated event when Chat transcript is saved to a case. • <code>EmailMessageEvent</code>—generated event when an email related to a case object is sent or received. • <code>FacebookPost</code>—generated when a Facebook post is created from a case. Deprecated. • <code>MilestoneEvent</code>—generated when a case milestone is completed or reaches violation status. • <code>SocialPost</code>—generated when a social post is created from a case.  Note: If you set <code>Type</code> to <code>ContentPost</code>, also specify <code>ContentData</code> and <code>ContentFileName</code>.

Knowledge__ka

Provides access to the concrete object that represents a Knowledge article, the parent object for article versions. This object is available in API version 39.0 and later.

 **Note:** By default, the prefix for this object name is `Knowledge` and that is the value shown in this reference. However, this prefix can be modified by changing the **Object Name** for the `Knowledge__kav` object in Object Manager.

This object is derived from [KnowledgeArticle](#) on page 3033.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `undelete()`

Special Access Rules

Lightning Knowledge must be enabled in your org. A user must have the View Articles permission enabled. Salesforce Knowledge users, unlike customer and partner users, must also be granted the `Knowledge User` feature license.

Fields

Field	Details
ArchivedById	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user who archived the article.
ArchivedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the article was archived.
ArticleNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The unique number automatically assigned to the article when it's created. You can't change the format or value for this field.
CaseAssociationCount	Type int Properties Filter, Group, Sort Description The number of cases attached to the article.
FirstPublishedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the article was first published.
LastPublishedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The date when the article was last published.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
MasterLanguage	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The article's original language. Only accessible if your knowledge base supports multiple languages.
MigratedToFromArticle	Type string Properties Filter, Group, Nillable, Sort Description The ID for the corresponding pre- or post-migration article. Contains values only in orgs that migrate from Knowledge in Salesforce Classic to Lightning Knowledge. This field is available in API version 45.0 and later.
TotalViewCount	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description Total number of views for this article. This field is available in API version 39.0 and later.

Knowledge__kav

Provides access to the concrete object that represents a Knowledge article version. This object is available in API version 39.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

 **Note:** By default, the prefix for this object name is `Knowledge` and that is the value shown in this reference. However, this prefix can be modified by changing the **Object Name** for the `Knowledge__kav` object in Object Manager.

This object is derived from [KnowledgeArticleVersion](#) on page 3045.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

This object doesn't retrieve `<ActionOverrides>`.

Special Access Rules

Lightning Knowledge must be enabled in your org. A user must have the View Articles permission enabled. Salesforce Knowledge users, unlike customer and partner users, must also be granted the `Knowledge User` feature license.

Fields

Field	Details
ArchivedById	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user who archived the article.
ArchivedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the article version was archived.

Field	Details
ArticleArchivedById	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user who archived the article.
ArticleArchivedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the article was archived.
ArticleCaseAttachCount	Type int Properties Filter, Group, Nillable, Sort Description The number of cases where this article is attached.
ArticleCreatedById	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user who created the article.
ArticleCreatedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the article was created.
ArticleMasterLanguage	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description The article's original language. Only accessible if your knowledge base supports multiple languages.
ArticleNumber	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description The unique number automatically assigned to the article when it's created. You can't change the format or value for this field.
ArticleTotalViewCount	Type int Properties Filter, Group, Nillable, Sort Description Total number of views for the article.
AssignedById	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user who assigned the article.
AssignedToId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user assigned to the article.
AssignmentDate	Type dateTime Properties Filter, Nillable, Sort Description The date the article was assigned to a user.
AssignmentDueDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The due date when an article is assigned.
AssignmentNote	Type textarea Properties Filter, Nillable, Sort Description Notes to the assignee from the user who assigned the article.
ExternalRef	Type string Properties Filter, Group, Nillable, Sort Description The ID of the item being referenced on the external system. For example, the ID of a document on a Google Drive or a page on Confluence.
ExternalSourceId	Type reference Properties Filter, Group, Nillable, Sort Description Reference to the external Knowledge data source object.
ExternalUrl	Type url Properties Filter, Nillable, Sort Description The URL of the knowledge content referenced in an external system. For example, the ID of a document in Google Drive or a page in Confluence.
FirstPublishedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the article was first published.

Field	Details
IsExternalData	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the data is external to the customer's knowledge base (<code>true</code>) or not (<code>false</code>).
IsLatestVersion	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the article is the most current version. (<code>true</code>) or not (<code>false</code>). This field can be <code>true</code> on the online or published version, a draft version in the primary language, a draft version in a translation, and the latest archived version. However, you can't filter by (<code>PublishState='Online'</code>) and (<code>IsLatestVersion=false</code>) because the online version is also the latest version. This field is available in API version 24.0 and later.
IsMasterLanguage	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the article has one or more translations associated with it (<code>true</code>) or not (<code>false</code>).
IsOutOfDate	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the source article has been updated since this translated version was created (<code>true</code>) or not (<code>false</code>).
IsVisibleInApp	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Required. Indicates whether the article is visible in the Articles tab (<code>true</code>) or not (<code>false</code>).

Field	Details
IsVisibleInCsp	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Required. Indicates whether the article is visible in the Customer Portal (<code>true</code>) or not (<code>false</code>).
IsVisibleInPkb	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Required. Indicates whether the article is visible in the public knowledge base (<code>true</code>) or not (<code>false</code>).
IsVisibleInPrm	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Required. Indicates whether the article is visible in the partner portal (<code>true</code>) or not (<code>false</code>).
KnowledgeArticleId	Type reference Properties Filter, Group, Sort Description The ID of the article independent from its version. The value for this field is retrieved from the <code>Id</code> field of the KnowledgeArticle object.
Language	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The language that the article is written in, such as <code>French</code> or <code>Chinese (Traditional)</code>. Querying or searching articles in SOSL require that you specify the <code>Language</code> field in the <code>WHERE</code> clause. The language must be the same for all article types.

Field	Details
	Before API version 47.0, you must include the <code>Language</code> field to filter queries on Knowledge article versions. In API version 47.0 and later, you can filter queries on Knowledge article versions with or without <code>Language</code> depending on what you are querying.
<code>LastPublishedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The date when the article was last published.
<code>MasterVersionId</code>	Type reference Properties Filter, Group, Nillable, Sort Description ID of the source article, if the article is the translation of a source article. Only accessible if your knowledge base supports multiple languages.
<code>MigratedToFromArticleVersion</code>	Type string Properties Filter, Group, Nillable, Sort Description The ID for the corresponding pre- or post-migration article version. Contains values only in orgs that migrate from Classic to Lightning Knowledge. Available in API version 43.0 and later.
<code>NextReviewDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The date when the article must next be reviewed for accuracy. Available in API version 58.0 and later.
<code>OwnerId</code>	Type reference Properties Filter, Group, Sort Description The ID of the article's owner.

Field	Details
PublishStatus	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The publication status for the article: • Draft: any draft articles. • Online: articles published in Salesforce Knowledge. • Archived: archived articles. A user must have the “Manage Articles” permission enabled to use Online. Article queries and searches in SOQL or SOSL require that you specify either the PublishStatus or the Id field in the WHERE clause. You can search for only one publication status per article type in a single SOSL query. When searching for articles with a PublishStatus of Archived, also check that IsLatestVersion equals false in your WHERE clause.
RecordTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the API Name that describes the type of article. Use the record type to determine the article structure and other settings for different types of content.
SourceId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the source from which the article was created (Case or Reply). This field is only accessible from the API and isn’t visible in the Salesforce UI.
Summary	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Summary of the article. Maximum size is 1000 characters.
Title	Type string

Field	Details
	Properties Create, Defaulted on create, Filter, Group, idLookup, Sort, Update Description Required. Article's title. Maximum size is 255 characters.
TranslationCompletedDate	Type dateTime Properties Filter, Nillable, Sort Description Date and time when the article was last translated. Only accessible if your knowledge base supports multiple languages.
TranslationExportedDate	Type dateTime Properties Filter, Nillable, Sort Description Date and time when the article was last exported for translation. Only accessible if your knowledge base supports multiple languages.
TranslationImportedDate	Type dateTime Properties Filter, Nillable, Sort Description Date and time when the article was last imported for translation. Only accessible if your knowledge base supports multiple languages.
UrlName	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Represents the article's URL. Can contain alphanumeric characters and hyphens but can't begin or end with a hyphen. Use a unique value regardless of context. (For example, a unique value allows you to get expected results when running an Apex test with <code>SeeAllData</code> set to <code>false</code>.) <code>UrlName</code> is case-sensitive and its maximum size is 255 characters.
ValidationStatus	Type picklist

Field	Details
	Properties Defaulted on create, Filter, Group
	Description Shows whether the content of the article has been validated. Possible values are <code>Validated</code> and <code>Not Validated</code> . The default value is <code>Not Validated</code> . This field is available in API version 24.0 or later.
VersionNumber	Type int
	Properties Group, Sort
	Description The number assigned to a version of an article. This field is available in API version 24.0 and later.

Knowledge__DataCategorySelection

Represents a data category that classifies an article. This object is available in API version 39.0 and later.



Note: By default, the prefix for this object name is `Knowledge` and that is the value shown in this reference. However, this prefix can be modified by changing the **Object Name** for the `Knowledge__kav` object in Object Manager.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Lightning Knowledge must be enabled in your org.

Fields

Field	Details
DataCategoryGroupName	Type datacategorygroupreference
	Properties Create
	Description Unique name of the data category group which has categories associated with the article.

Field	Details
DataCategoryName	Type datacategorygroupreference Properties Create Description Unique name of the data category associated with the article.
ParentId	Type reference Properties Create, Filter, Group, Sort Description ID of the article associated with the data category selection.

Usage

Every article in Salesforce Knowledge can be categorized. A data category selection represents a category that has been selected to classify an article. You can use this object to query and manage article categorization in your organization. Client applications can create a categorization for an article with a Draft status. They can also delete and query article categorizations.



Note: When using this object to classify an article, you can't select both a category (for example USA) and one of its descendants (California) or ascendant categories (North America). In this case, only the first category is selected.

KnowledgeableUser

Represents a user identified as knowledgeable about a specific topic, and ranks them relative to other knowledgeable users. This object is available in API version 31.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
NetworkId	Type reference Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description ID of the Experience Cloud site the topic exists in. This field is available only if digital experiences is enabled for your org.
RawRank	Type int Properties Filter, Group, Nillable, Sort Description Rank of this user's knowledge on the topic relative to other users.
TopicId	Type reference Properties Filter, Group, Sort Description Unique ID for the topic in Salesforce.
UserId	Type reference Properties Filter, Group, Sort Description Unique ID for the user in Salesforce.

KnowledgeArticle

Provides read-only access to an article and the ability to delete the primary article. This object is available in API version 19.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Unlike KnowledgeArticleVersion, the ID of a KnowledgeArticle record is identical irrespective of the article's version (status).

[Knowledge__ka](#) on page 3019 is derived from this object.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Knowledge must be enabled in your org. A user must have the View Articles permission enabled. Salesforce Knowledge users, unlike customer and partner users, must also be granted the `Knowledge User` feature license.

Fields

Field Name	Details
ArchivedById	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user who archived the article.
ArchivedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the article was archived.
ArticleNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The unique number automatically assigned to the article when it's created. You can't change the format or value for this field.
CaseAssociationCount	Type int Properties Filter, Group, Sort Description The number of cases attached to the article.
FirstPublishedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the article was first published.

Field Name	Details
IsGeneratedByLlm	Type boolean Properties Defaulted on create, Filter, Group, Sort Description True if the first version of an article was created with an LLM. This object is available in API version 59.0 and later.
LastPublishedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the article was last published.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user has not viewed this record or list view, though they might have accessed it (LastReferencedDate)
MasterLanguage	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The article's original language. Only accessible if your knowledge base supports multiple languages.
MigratedToFromArticle	Type string

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description The ID for the corresponding pre- or post-migration article. Contains values only in orgs that migrate from Knowledge in Salesforce Classic to Lightning Knowledge. This field is available in API version 45.0 and later.
TotalViewCount	Type int Properties Filter, Group, Nillable, Sort Description Total number of views for this article. This field is available in API version 39.0 and later.

Usage

Use this object to query or retrieve articles. KnowledgeArticle can be used in a SOQL clause, but doesn't provide access to the fields from the article. Provides read-only access to an article and the ability to delete the primary article.

Usage for SOQL with KnowledgeArticle

To expose the `migrated_to_from_id` column on KnowledgeArticle and KnowledgeArticleVersion to the sObject API: expose `MigratedToFromArticle` in KnowledgeArticle.

For SOQL:

- To filter by `MigratedToFromArticle`, remove any other filters.
- When filtering by `MigratedToFromArticle`, use the '=' or 'IN' operator.
- When filtering by `MigratedToFromArticle`, the value can't be null or empty.

SEE ALSO:

[KnowledgeArticleVersion](#)

KnowledgeArticleEventLog

Knowledge Article View event logs contain user activity with your knowledge base. This object is available in API version 61.0 and later.



Note: This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
ArticleIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The id of the article. For example: 00Dxx0000001gEb.
ArticleStatus	Type string Properties Filter, Group, Nillable, Sort Description The status of the article. Possible values are: • D—Draft • O—Online • A—Archived
ArticleVersion	Type double Properties Filter, Nillable, Sort Description The article version number. For example: 2.
ArticleVersionIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the article version. For example: ka0R00000005rt6.
Context	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description Context of the request.
IsLargeLanguageModel	Type string Properties Filter, Group, Nillable, Sort Description Whether the article was written with an LLM.
IsLastVersion	Type boolean Properties Defaulted on create, Filter, Group, Sort Description True if it is the last version of the article. The default value is <code>false</code> .
Language	Type string Properties Filter, Group, Nillable, Sort Description The ISO code of the language. For example: <code>en_US/</code>
ObjectType	Type string Properties Filter, Group, Nillable, Sort Description The object requested. For example: <code>Knowledge__kav</code> .
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestId</code>. For example: 3nWgxWbDKWWDIk0FKfF5DV.
SessionIdentifier	Type string Properties Filter, Group, Nillable, Sort Description Session ID of the request. For example: gV7pCSW2vGaaJNFj3GSpuPIjNbKVbSxRvx34LJsIvuc=.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.
UserType	Type string Properties Filter, Group, Nillable, Sort Description User type of the request. Possible values are: • A—App • C—Customer Portal • P—Partner Portal • G—Guest

KnowledgeArticleFeedback

Represents information about feedback from users on Knowledge articles and details about assignment of feedback to the article owner or team to take action. This object is available in API version 64.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`, `delete()`, `update()`

 **Note:** A KnowledgeArticleFeedback record is created only when a user submits feedback.

Special Access Rules

Knowledge must be enabled in your org. A user must have the View Articles permission enabled. Salesforce Knowledge users, unlike customer and partner users, must also be granted the `Knowledge User` feature license. Knowledge Article Feedback Org Preference should also be enabled.

Fields

Field Name	Details
AssignedToId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The queue name or user ID of the feedback assignee, who reviews and takes action on the feedback. This field is a polymorphic relationship field. Relationship Name AssignedTo Refers To Queue, User
FeedbackResponseId	Type reference Properties Filter, Group, Sort Description The unique ID of the feedback response associated with the feedback record. This field is a relationship field.

Field Name	Details
	Relationship Name FeedbackResponse Refers To SurveyResponse
FeedbackSource	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The source of feedback. Possible values are: • Internal • Community
FeedbackSubmitterId	Type reference Properties Filter, Group, Sort Description The ID of the user who submitted feedback. This field is a relationship field. Relationship Name FeedbackSubmitter Refers To User
IsLiked	Type boolean Properties Defaulted on create, Filter, Group, Sort Description The answer to the Article Liked question in the feedback form. The default value is false
KnowledgeArticle	Type string Properties Filter, Group, Sort Description The ID of the article associated with the feedback response.

Field Name	Details
KnowledgeArticleUrl	Type url Properties Filter, Sort Description The URL of the article version associated with the feedback response.
KnowledgeArticleVersion	Type string Properties Filter, Group, idLookup, Sort Description The version of the article associated with the feedback response.
KnowledgeArticleVersionTitle	Type string Properties Filter, Group, Nillable, Sort Description The title of the article version associated with the feedback response.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the feedback record was last accessed or referenced.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the feedback record was last viewed.
LinkedArticleEntityId	Type reference Properties Filter, Group, Nillable, Sort Description Internal entity that links a Knowledge article version and survey invitation.

Field Name	Details
	This field is a relationship field. Relationship Name LinkedArticleEntity Refers To LinkedArticle
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description A unique name automatically assigned to the Knowledge article feedback when it's created. You can't change the format or value of this field.
OwnerId	Type reference Properties Filter, Group, Sort, Update Description The user ID of the article feedback owner. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
ReviewActionTaken	Type picklist Properties Filter, Group, Sort, Nillable, Update Description The review action taken to address the feedback. You can configure the possible values for this picklist field.
ReviewComment	Type textArea Properties Filter, Nillable, Sort, Update Description The review comment provided by the feedback assignee. This is optional. The maximum length is 1,212 characters.

Field Name	Details
ReviewCompletionDate	Type dateTime Properties Filter, Nillable, Sort, Update Description The date when the review was completed.
ReviewDueDate	Type dateTime Properties Filter, Nillable, Sort, Update Description The due date for completing the feedback review.
ReviewStatus	Type picklist Properties Filter, Group, Sort, Nillable, Update Description The review status of the feedback. You can configure the possible values for this picklist field.

Usage

Use this object to query, retrieve, or search for article feedback based on your access level to the articles. You can filter feedback records by Knowledge article, article version, or other criteria.

SOQL Samples

The SOQL clause queries KnowledgeArticleFeedback records which aren't reviewed.

```
SELECT FeedbackResponseId, IsLiked, KnowledgeArticleVersion
FROM KnowledgeArticleFeedback
WHERE ReviewCompletionDate = NULL
```

The SOQL clause queries KnowledgeArticleFeedback records for a specific article version.

```
SELECT FeedbackResponseId, IsLiked, KnowledgeArticleVersion, AssignedToId, ReviewStatus
FROM KnowledgeArticleFeedback
WHERE KnowledgeArticleVersion = 'ka0SG00000KSjjRYAT'
```

KnowledgeArticleVersion

Provides a global view of standard article fields across all types of articles depending on their version. This object is available in API version 18.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Use this object to:

- Query or search generically across multiple types of articles.
- Filter on a specific version.
- Update standard fields in draft versions.

When you query on the archived article, the results include both the article and the article's archived versions.

[Knowledge__kav](#) on page 3022 is derived from this object.

Supported Calls

`describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `search()`

 **Note:**

- You can only update draft versions.
- You can't update draft translations with the `knowledgeManagement` REST API.
- For Lightning Knowledge, to create, update, or delete a Knowledge article version, use the call on `Knowledge__kav`. For example, to delete, use `Knowledge__kav.delete()`.
- For Knowledge in Salesforce Classic, to create, update, or delete a Knowledge article version, use the call on `ArticleType__kav`, where `ArticleType` is the name of the article's type. For example, to delete, use `ArticleType__kav.delete()`.

Special Access Rules

Knowledge must be enabled in your org. A user must have the View Articles permission enabled. Salesforce Knowledge users, unlike customer and partner users, must also be granted the `Knowledge User` feature license.

Fields

Field Name	Details
ArchivedById	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user who archived the article.

Field Name	Details
ArchivedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the article version was archived.
ArticleArchivedById	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user who archived the article.
ArticleArchivedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the article was archived.
ArticleCaseAttachCount	Type int Properties Filter, Group, Nillable, Sort Description The number of cases where this article is attached.
ArticleCreatedById	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user who created the article.
ArticleCreatedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the article was created.

Field Name	Details
ArticleMasterLanguage	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The article's original language. Only accessible if your knowledge base supports multiple languages.
ArticleNumber	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description The unique number automatically assigned to the article when it's created. You can't change the format or value for this field.
ArticleTotalViewCount	Type int Properties Filter, Group, Nillable, Sort Description Total number of views for the article.
ArticleType	Type string Properties Defaulted on createFilter Description Indicates the API Name of the article type. The <code>ArticleType</code> is assigned to the article when it's created. You can't change the value of this field. This field is available in orgs using Knowledge in Salesforce Classic in API version 26.0 and later.
AssignedById	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user who assigned the article.
AssignedToId	Type reference

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description The ID of the user assigned to the article.
AssignmentDate	Type dateTime Properties Filter, Nillable, Sort Description The date the article was assigned to a user.
AssignmentDueDate	Type dateTime Properties Filter, Nillable, Sort Description The due date when an article is assigned.
AssignmentNote	Type textarea Properties Filter, Nillable, Sort Description Notes to the assignee from the user who assigned the article.
FirstPublishedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the article was first published.
IsLatestVersion	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the article is the most current version. (<code>true</code>) or not (<code>false</code>). This field can be <code>true</code> on the online or published version, a draft version in the primary language, a draft version in a translation, and the latest archived version. However, you can't filter by (<code>PublishState='Online'</code>) and (<code>IsLatestVersion=false</code>) because

Field Name	Details
	the online version is also the latest version. This field is available in API version 24.0 and later.
IsMasterLanguage	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the article has one or more translations associated with it (<code>true</code>) or not (<code>false</code>). Only accessible if your knowledge base supports multiple languages.
IsOutOfDate	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the source article has been updated since this translated version was created (<code>true</code>) or not (<code>false</code>). Only accessible if your knowledge base supports multiple languages.
IsVisibleInApp	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Required. Indicates whether the article is visible in the Articles tab (<code>true</code>) or not (<code>false</code>).
IsVisibleInCsp	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Required. Indicates whether the article is visible in the Customer Portal (<code>true</code>) or not (<code>false</code>).
IsVisibleInPkb	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field Name	Details
	Description Required. Indicates whether the article is visible in the public knowledge base (<code>true</code>) or not (<code>false</code>).
IsVisibleInPrm	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Required. Indicates whether the article is visible in the partner portal (<code>true</code>) or not (<code>false</code>).
KnowledgeArticleId	Type reference Properties Filter, Group, Sort Description The ID of the article independent from its version. The value for this field is retrieved from the <code>Id</code> field of the KnowledgeArticle object.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language that the article is written in, such as <code>French</code> or <code>Chinese (Traditional)</code> . Querying or searching articles in SOSL require that you specify the <code>Language</code> field in the WHERE clause. The language must be the same for all article types. Before API version 47.0, you must include the <code>Language</code> field to filter queries on Knowledge article versions. In API version 47.0 and later, you can filter queries on Knowledge article versions with or without <code>Language</code> depending on what you are querying.
LargeLanguageModel	Type string Properties Filter, Group, Nillable, Sort Description Shows the LLM used to create an article version. This object is available in API version 59.0 and later.

Field Name	Details
LastPublishedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the article was last published.
MasterVersionId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the source article, if the article is the translation of a source article. Only accessible if your knowledge base supports multiple languages.
MigratedToFromArticleVersion	Type string Properties Filter, Group, Nillable, Sort Description The ID for the corresponding pre- or post-migration article version. Contains values only in orgs that migrate from Classic to Lightning Knowledge. Available in API version 43.0 and later.
NextReviewDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the article must next be reviewed for accuracy. Available in API version 58.0 and later.
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the article's owner.
PublishStatus	Type picklist

Field Name	Details
	Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The publication status for the article: • Draft: any draft articles. • Online: articles published in Salesforce Knowledge. • Archived: archived articles. A user must have the “Manage Articles” permission enabled to use Online. Article queries and searches in SOQL or SOSL require that you specify either the PublishStatus or the Id field in the WHERE clause. You can search for only one publication status per article type in a single SOSL query. When searching for articles with a PublishStatus of Archived, also check that IsLatestVersion equals false in your WHERE clause.
SourceId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the source from which the article was created (Case or Reply).
Summary	Type textarea Properties Filter, Nillable, Sort Description Summary of the article. Maximum size is 1000 characters.
Title	Type string Properties Filter, Group, idLookup, Sort Description Required. Article's title. Maximum size is 255 characters.
TranslationCompletedDate	Type dateTime Properties Filter, Nillable, Sort

Field Name	Details
	Description Date and time when the article was last translated. Only accessible if your knowledge base supports multiple languages.
TranslationExportedDate	Type dateTime Properties Filter, Nillable, Sort Description Date and time when the article was last exported for translation. Only accessible if your knowledge base supports multiple languages.
TranslationImportedDate	Type dateTime Properties Filter, Nillable, Sort Description Date and time when the article was last imported for translation. Only accessible if your knowledge base supports multiple languages.
UrlName	Type string Properties Filter, Group, idLookup, Sort Description Required. Represents the article's URL. Can contain alphanumeric characters and hyphens but can't begin or end with a hyphen. This value must be unique regardless of context. (For example, a unique value allows you to get expected results when running an Apex test with <code>SeeAllData</code> set to <code>false</code> .) <code>UrlName</code> is case-sensitive and its maximum size is 255 characters.
ValidationStatus	Type picklist Properties Defaulted on create, Filter, Group Description Shows whether the content of the article has been validated. Possible values are <code>Validated</code> and <code>Not Validated</code> . The default value is <code>Not Validated</code> . This field is available in API version 24.0 or later.
VersionNumber	Type int

Field Name	Details
	Properties Group, Sort
	Description The number assigned to a version of an article. This field is available in API version 24.0 and later.

Usage

Use this object to query, retrieve, or search for articles across all types of articles depending on their version. You can update draft primary articles. Also, you can delete articles that aren't drafts. Client applications can use KnowledgeArticleVersion with `describeDataCategoryGroups()` and `describeDataCategoryGroupStructures()` to return the category groups and the category structure associated with Salesforce Knowledge.

To access an article independent of its version, use the KnowledgeArticle object.

In Lightning Knowledge, the type of article is determined by the `RecordType` field on the concrete derived object (for example, [Knowledge__kav](#) on page 3022). For Knowledge in Salesforce Classic, the type of article is determined by the `ArticleType` field and the concrete derived object uses the prefix of the article type name (for example, `FAQ__kav` for the FAQ article type).

SOQL Samples

The following SOQL clause uses KnowledgeArticleVersion to query all published articles from all articles complying with the classification specified in the WITH DATA CATEGORY clause:

```
SELECT Title, Summary
FROM KnowledgeArticleVersion
WHERE PublishStatus='Online'
AND Language = 'en_US'
WITH DATA CATEGORY Geography__c ABOVE_OR_BELOW europe__c AND Product__c BELOW All__c
```

The following SOQL clause for Lightning Knowledge uses the `Offer` record type to limit the query to all draft articles:

```
SELECT Id, Title
FROM Knowledge__kav
WHERE PublishStatus='Draft'
AND Language = 'en_US'
AND RecordTypeId = '<specify RecordTypeId for Offer here>'
WITH DATA CATEGORY Geography__c AT (france__c,usa__c) AND Product__c ABOVE dsl__c
```

The following SOQL clause for Salesforce Classic uses the `Offer` article type to limit the query to all draft articles:

```
SELECT Id, Title
FROM Offer__kav
WHERE PublishStatus='Draft'
AND Language = 'en_US'
WITH DATA CATEGORY Geography__c AT (france__c,usa__c) AND Product__c ABOVE dsl__c
```

The following SOQL clause uses KnowledgeArticleVersion to query the IDs of all archived versions of a particular article:

```
SELECT Id
FROM KnowledgeArticleVersion
```

```
WHERE PublishStatus='Archived'
AND IsLatestVersion=false
AND KnowledgeArticleId='kA1D00000001PQ6KAM'
```

SOQL and SOSL with KnowledgeArticleVersion

- Filter on a single value of `PublishStatus` for best results. To find all versions of each article, omit the `PublishStatus` filter, but do filter on one or more master key IDs. To retrieve all archived versions for a given article, specify a SOQL filter where `IsLatestVersion` is `false`.
- In API version 46.0 and earlier, queries without a filter on `PublishStatus` return published articles by default. In API version 47.0 and later, draft, published, and archived articles are returned when Lightning Knowledge is enabled.
- To support security, only users with the “View Draft Articles” permission see articles whose `PublishStatus` value is `Draft`. Similarly, only users with the “View Archived Articles” permission see articles whose `PublishStatus` value is `Archived`.
- Archived article versions are stored in the **Knowledge__kav** object. To query archived article versions, specify the article `Id` and set `IsLatestVersion='0'`.
- You can't use binding variables in Apex SOQL statements with `KnowledgeArticleVersion` objects. For example, the following SOQL statement causes a compilation error.

```
final String PUBLISH_STATUS_ONLINE = 'Online';
List<Knowledge__kav> articles = [
    SELECT Id FROM Knowledge__kav
    WHERE PublishStatus = :PUBLISH_STATUS_ONLINE
];
```

Instead, use dynamic SOQL as follows. See [Dynamic SOQL](#) in *Apex Developer Guide*.

```
final String PUBLISH_STATUS_ONLINE = 'Online';
final String q = 'SELECT Id, PublishStatus FROM Knowledge__kav
WHERE PublishStatus = :PUBLISH_STATUS_ONLINE';
List<Knowledge__kav> articles = Database.query(q);
```

Other Usage for SOQL and SOSL with KnowledgeArticleVersion

To expose the *migrated_to_from_id* on **KnowledgeArticle** and **KnowledgeArticleVersion** to the sObject API: expose **MigratedToFromArticleVersion** in **KnowledgeArticleVersion**.

- For SOQL:
 - To filter by **MigratedToFromArticleVersion**, remove any other filters.
 - When filtering by **MigratedToFromArticleVersion**, use the '=' or 'IN' operator.
 - When filtering by **MigratedToFromArticleVersion**, the value can't be null or empty.
- SOSL doesn't support **MigratedToFromArticleVersion**.

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

KnowledgeArticleVersionHistory

History is available for tracked fields of the object.

SEE ALSO:

- [KnowledgeArticle](#)
- [KnowledgeArticleViewStat](#)
- [KnowledgeArticleVoteStat](#)

KnowledgeArticleVersionHistory

Enables read-only access to the full history of an article. This object is available in API version 25.0 and later. Knowledge__VersionHistory is derived from this object. To access this derived object, [turn on field history tracking](#) for Knowledge objects.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`
You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Special Access Rules

Knowledge must be enabled in your org. This object respects field, entity, and record-level security. You must have at least “Read” permission on the article type or the field to access its history. For data category security, Salesforce determines access based on the categorization of the online version of an article. If there’s no online version, then security is applied based on the archived version, followed by the security of the draft version.

Fields

Field Name	Details
DataType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of data that is tracked in the history table. This field is available in API version 50.0 and later.
EventType	Type picklist Properties Filter, Group, Restricted picklist, Sort

Field Name	Details
	Description The type of event that is tracked in the history table.
FieldName	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Name of the tracked field.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language that the article is written in, such as <code>French</code> or <code>Chinese (Traditional)</code> . Querying or searching articles in SOSL requires that you specify the <code>Language</code> field in the <code>WHERE</code> clause. The language must be the same for all article types.
NewValue	Type anyType Properties Nillable, Sort Description The new value of the field that was changed.
OldValue	Type anyType Properties Nillable, Sort Description The most recent value of the field before it was changed.
ParentId	Type reference Properties Filter, Group, Sort Description The ID of the article.

Field Name	Details
ParentObjectType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of object that contains the field.
VersionId	Type reference Properties Filter, Group, Nillable, Sort Description The ID assigned to a version of the article. This is a polymorphic relationship field.
VersionNumber	Type int Properties Filter, Group, Sort Description The number assigned to a version of an article. This field is available in API version 24.0 and later.

Usage

Use this object to query events in the history of an article. For example, you can retrieve the number of edits a particular user has made to an article, how many times the article has been published, and so on.

KnowledgeArticleViewStat

Provides certain statistics related to the number of views for the specified article across all article types. The view count statistics are for published and archived articles only. View counts for draft articles aren't tracked. This object is read-only and available in API version 20.0 and later.

Knowledge__ViewStat is derived from this object.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Knowledge must be enabled in your org. Users must have access to the published and archived versions of an article to retrieve its views. For more information on published and archived article versions, see the `PublishStatus` field in `KnowledgeArticleVersion`.

Fields

Field Name	Details
Channel	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The channel where the article is viewed: • <code>AllChannels</code> for article views across all channels. • <code>App</code> for the internal Salesforce Knowledge application. • <code>Pkb</code> for article views in the public knowledge base. • <code>Csp</code> for Customer Portal. • <code>Prm</code> for article view in partner portal.
NormalizedScore	Type double Properties Filter, Nillable, Sort Description Article's weighted views in the selected channel. The article with most views has a score of 100. Other article views are then calculated relative to this highest view score. For example, if the best read article has 2000 views and another has 1000. The first one gets a score of 100 while the second gets 50.
ParentId	Type reference Properties Filter, Group, Sort Description ID of the viewed article. This corresponds to a <code>KnowledgeArticle</code> record.
ViewCount	Type int Properties Filter, Group, Sort

Field Name	Details
	Description The number of unique views a published or archived article has received in the selected channel. An article with a high number of views may not always have a high normalized score. The normalized score for an article is calculated based on views over time, with more recent views earning a higher score. This field is available in API version 27.0 and later.

Usage

Use this object to query or retrieve certain statistics for article views.

Alternatively, client applications can use the article type `API__Name` followed by `__ViewStat` to query or retrieve most viewed articles from a specific article type.

SOQL Samples

The following SOQL clause uses `KnowledgeArticleViewStat` to query all the article views in Salesforce Knowledge and return the related articles:

```
SELECT Id, NormalizedScore, Parent.Id
FROM KnowledgeArticleViewStat where Channel = 'App'
ORDER BY NormalizedScore
```

Use the following clause to restrict your query to `Offer` articles for the `Offer` article type:

```
SELECT Id, NormalizedScore, Parent.Id
FROM Offer__ViewStat where Channel = 'App'
ORDER BY NormalizedScore
```

SEE ALSO:

[KnowledgeArticle](#)

[KnowledgeArticleVersion](#)

[KnowledgeArticleVoteStat](#)

KnowledgeArticleVoteStat

Provides the weighted rating for the specified article on a scale of 1 to 5 across all article types. This object is read-only and available in API version 20.0 and later.

`Knowledge__VoteStat` is derived from this object.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Knowledge must be enabled in your org. Users must have access to the published version of an article to retrieve its votes. For more information on published article version, see the `PublishStatus` field in `KnowledgeArticleVersion`.

Fields

Field Name	Details
<code>Channel</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The channel where the article is rated: • <code>AllChannels</code> for article views across all channels. • <code>App</code> for the internal Salesforce Knowledge application. • <code>Pkb</code> for article views in public knowledge base. • <code>Csp</code> for Customer Portal. • <code>Prm</code> for article view in partner portal.
<code>NormalizedScore</code>	Type double Properties Filter, Nillable, Sort Description Article's weighted score on a scale of 1 to 5. A higher score means more votes. Articles without recent votes trend towards an average rating of three stars.
<code>ParentId</code>	Type reference Properties Filter, Group, Sort Description The rated article. This corresponds to a <code>KnowledgeArticle</code> record.

Usage

Use this object to query or retrieve the rating for an article.

Alternatively, client applications can use the article type `API Name` followed by `__VoteStat` to query or retrieve the rating for an article for a specific article type.

SOQL Samples

See KnowledgeArticleViewStat.

SEE ALSO:

- [KnowledgeArticle](#)
- [KnowledgeArticleVersion](#)
- [KnowledgeArticleViewStat](#)

LandingPage

Represents an Account Engagement landing page. A landing page is a web page that a visitor reaches after clicking a link or advertisement. Landing pages can be created in Account Engagement and synced to Salesforce or created on the Landing Page object in Account Engagement Lightning App. This object is available in API version 42.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access this object, your org must use Account Engagement and users need the CRM User or Sales User permission set. To create, update, or delete a builder landing page, the Use Account Engagement Content Experience permission set is required.

Fields

Field Name	Details
CampaignId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the related campaign.
ContentLastSaved	Type dateTime Properties Filter, Nillable, Sort

Field Name	Details
	Description The date and time of the last time someone changed and saved the landing page Name, Campaign, Content, IsHideFromSearchEngineIndex, or Vanity URL fields. This field is available in API version 53.0 and later.
ContentLastSavedById	Type reference Properties Filter, Group, Nillable, Sort Description The user who last changed and saved the Content body. This is a relationship field. This field is available in API version 53.0 and later. Relationship Name ContentLastSaved Relationship Type Lookup Refers To User
FallbackUrl	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The URL used to redirect viewers after the landing page is unpublished. This field is available in API version 54.0 and later.
FooterCode	Type textarea Properties Create, Nillable, Update Description <Script>, <style>, and <link> code added before the landing page's closing body tag. This field is available in API version 54.0 and later.
FormErrorRate	Type percent Properties Filter, Group, Sort

Field Name	Details
	Description The percentage of errors made on the landing page form. Calculated as total errors divided by total views.
FormSubmissionRate	Type percent Properties Filter, Nillable, Sort Description The percentage of form submissions based on the total number of landing page views.
HeaderCode	Type textarea Properties Create, Nillable, Update Description <Script>, <style>, and <link> code added to the head tag of the landing page. This field is available in API version 54.0 and later.
IsHideFromSearchEngineIndex	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the landing page is hidden from search engine indexing. The default value is <code>false</code> . This field is available in API version 53.0 and later.
LastPublished	Type dateTime Properties Filter, Nillable, Sort Description The date and time of the last time someone published the landing page. This field is available in API version 53.0 and later.
LastPublishedById	Type reference Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description The user who last published the landing page. This is a relationship field. This field is available in API version 53.0 and later. Relationship Name LastPublished Relationship Type Lookup Refers To User
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Indicates when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the current user last viewed this record. If this value is null, this record might only have been referenced (see LastReferencedDate) and not viewed. This field is available in API version 53.0 and later.
Name	Type string Properties Filter, Group, Sort Description The name of the landing page.
PublicLink	Type string Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description The URL where the landing page is available. This field is available in API version 53.0 and later.
Source	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Indicates where the landing page was created. The default value is <code>Salesforce</code> . This field is available in API version 53.0 and later.
Status	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the state of the landing page: <code>Draft</code> , <code>Published</code> , or <code>Published (Changes Pending)</code> . The default value is <code>Draft</code> . This field is available in API version 53.0 and later.
TotalFormErrors	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The total number of times a visitor or prospect enters an invalid email address or leaves a required field blank on a landing page form.
TotalFormSubmissions	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The number of times a form on the landing page has been submitted.
TotalTrackedLinkClicks	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort

Field Name	Details
	Description The number of times prospects clicked a link on the landing page's thank you page.
TotalViews	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The total number of times visitors and prospects viewed your landing page. This total includes multiple views from the same person.
UniqueFormErrors	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The number of individual visitors and prospects who made an error on the form. This metric doesn't include multiple errors from the same person.
UniqueFormSubmissions	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The number of individual visitors who submitted a form on the landing page. This metric doesn't include multiple submissions from the same person.
UniqueTrackedLinkClicks	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The number of times a prospect clicked a link on the landing page's thank you page. This metric doesn't include multiple clicks of the same link.
UniqueViews	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort

Field Name	Details
	Description The number of individual visitors and prospects who viewed your landing page. This metric doesn't include multiple views from the same person.
VanityUrl	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The custom path that's appended to tracker domains to create a vanity URL. This field doesn't support scheme or domain values. This field is available in API version 53.0 and later.

Associated Objects

This object has the following associated objects. Unless otherwise noted, they're available in the same API version as this object.

[LandingPageChangeEvent](#) (API version 44.0)

Change events are available for the object.

[LandingPageFeed](#)

Feed tracking is available for the object.

Lead

Represents a prospect or lead.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `merge()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ActionCadenceAssigneeId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description The ID of the sales rep designated to work the lead through their assigned cadence. This field is available in API version 48.0 and later when the Sales Engagement license is enabled. To see this field, the user also needs the Sales Engagement User or Sales Engagement Quick Cadence Creator user permission set.
ActionCadenceId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the lead's assigned cadence. This field is available in API version 48.0 and later when the Sales Engagement license is enabled. To see this field, the user also needs the Sales Engagement User or Sales Engagement Quick Cadence Creator user permission set.
ActionCadenceState	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The state of the current action cadence tracker. This field is available in API version 50.0 and later when the Sales Engagement license is enabled. To see this field, the user also needs the Sales Engagement User or Sales Engagement Quick Cadence Creator user permission set. Possible values are: • Complete • Error • Initializing • Paused • Processing • Running
ActiveTrackerCount	Type int Properties Filter, Group, Nillable, Sort Description The number of cadences that are actively running on this lead. This field is available in API version 57.0 and later when the Sales Engagement license is enabled. To see this field, the user also needs the Sales Engagement User or Sales Engagement Quick Cadence Creator user permission set.

Field	Details
ActivityMetricId	Type reference Properties Filter, Group, Nillable, Sort Description When Einstein Activity Capture with Activity Metrics is enabled, the ID of the related activity metric. This field is a relationship field. This field is available in API version 41.0 and later. Relationship Name ActivityMetric Refers To ActivityMetric
ActivityMetricRollupId	Type reference Properties Filter, Group, Nillable, Sort Description When Einstein Activity Capture with Activity Metrics is enabled, the ID of the related activity metric rollup. This field is a relationship field. This field is available in API version 41.0 and later. Relationship Name ActivityMetricRollup Refers To ActivityMetricRollup
Address	Type address Properties Filter, Nillable Description The compound form of the address. Read-only. For details on compound address fields, see Address Compound Fields.
AnnualRevenue	Type currency Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description Annual revenue for the lead's company.
City	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description City for the lead's address.
CleanStatus	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates the record's clean status compared with Data.com. . Several values for <code>CleanStatus</code> appear with different labels on the lead record. Values include: - Acknowledged - Reviewed - Different - Inactive - Matched - In Sync - NotFound - Not Found - Pending - Not Compared - SelectMatch - Select Match Skipped
Company	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Required. The lead's company. If person account record types have been enabled, and if the value of <code>Company</code> is null, the lead converts to a person account.
CompanyDunsNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The Data Universal Numbering System (D-U-N-S) number, which is a unique, nine-digit number assigned to every business location in the Dun & Bradstreet database that has a unique, separate, and distinct operation. Industries and companies use D-U-N-S numbers as a global standard for business identification and tracking. Maximum size is 9 characters. This field is only available to organizations that use Data.com Prospector or Data.com Clean.
ConvertedAccountId	Type reference Properties Create, Filter, Group, Nillable, Sort Description Object reference ID that points to the account into which the lead converted. This is a relationship field. Relationship Name ConvertedAccount Relationship Type Lookup Refers To Account
ConvertedContactId	Type reference Properties Create, Filter, Group, Nillable, Sort Description Object reference ID that points to the contact into which the lead converted. This is a relationship field. Relationship Name ConvertedContact Relationship Type Lookup Refers To Contact
ConvertedDate	Type date Properties Create, Filter, Group, Nillable, Sort Description Date on which this lead was converted.

Field	Details
ConvertedOpportunityId	Type reference Properties Create, Filter, Group, Nillable, Sort Description Object reference ID that points to the opportunity into which the lead has been converted. This is a relationship field. Relationship Name ConvertedOpportunity Relationship Type Lookup Refers To Opportunity
ConnectionReceivedId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the PartnerNetworkConnection that shared this record with your org. This field is available when Salesforce to Salesforce is enabled.
ConnectionSentId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the PartnerNetworkConnection that this record is shared with. This field is available Salesforce to Salesforce is enabled. In API version 16.0 and later, this value is <code>null</code>. Use PartnerNetworkRecordConnection object to forward records to connections.
Country	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The lead's country.
CountryCode	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO country code for the lead's address.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for organizations with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
DandBCompanyId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Reference ID to a Dun & Bradstreet® company record, associated with an account added from Data.com. Relationship Name DandbCompany Refers To DandbCompany
Description	Type textarea Properties Create, Nillable, Update Description The lead's description.
Division	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description A logical segment of your organization's data. For example, if your company is organized into different business units, you could create a division for each business unit, such as North America, Healthcare, or Consulting. Available only when the Division permission is enabled.

Field	Details
Email	Type email Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The lead's email address.
EmailBouncedDate	Type dateTime Properties Filter, Nillable, Sort, Update Description If bounce management is activated and an email sent to the lead bounced, the date and time of the bounce. Email bounce functionality isn't triggered by record updates, including updates to this field.
EmailBouncedReason	Type string Properties Filter, Group, Nillable, Sort, Update Description If bounce management is activated and an email sent to the lead bounced, the reason for the bounce. Email bounce functionality isn't triggered by record updates, including updates to this field.
ExportStatus	Type picklist Properties Filter, Restricted picklist, Sort Description Derived field for the record map for Partner Connect. The export status of this opportunity to the partner's connected org. To see this field, enable Partner Connect and add the Export Vendor Records to an Authorized Partner Org user permission to the cosell export user. See Set Up Partner Connect as a Vendor in <i>Salesforce Help</i>. Available in API version 62.0 and later.
Fax	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description The lead's fax number.

Field	Details
FirstCallDateTime	Type datetime Properties Filter, Nillable, Sort Description The date and time of the first call placed to the lead. This field is available in API version 48.0 when the Sales Engagement license is enabled. To see this field, the user also needs the Sales Engagement User or Sales Engagement Quick Cadence Creator user permission set.
FirstEmailDateTime	Type datetime Properties Filter, Nillable, Sort Description The date and time of the first email sent to the lead. This field is available in API version 48.0 when the Sales Engagement license is enabled. To see this field, the user also needs the Sales Engagement User or Sales Engagement Quick Cadence Creator user permission set.
FirstName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The lead's first name up to 40 characters.
GeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Accuracy level of the geocode for the address. For details on geolocation compound fields, see Compound Field Considerations and Limitations.
GenderIdentity	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The lead's internal experience of their gender, which may or may not correspond to their designated sex at birth.

Field	Details
HasOptedOutOfEmail	Type boolean Properties Create, Defaulted on create, Filter, Update Description Indicates whether the lead doesn't want to receive email from Salesforce (<code>true</code>) or does (<code>false</code>). Label is Email Opt Out.
HasOptedOutOfFax	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the lead doesn't want to receive faxes from Salesforce (<code>true</code>) or does (<code>false</code>). Label is FaxOpt Out.
IndividualId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the data privacy record associated with this lead. This field is available if you enabled Data Protection and Privacy in Setup. Relationship Name Individual Relationship Type Lookup Refers To Individual
Industry	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Industry in which the lead works.
IsConverted	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort

Field	Details
	Description Indicates whether the lead has been converted (<code>true</code>) or not (<code>false</code>). Label is Converted.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
IsPriorityRecord	Type boolean Properties Defaulted on create, Group Description Shows whether the user has marked the lead as important (<code>True</code>) or not (<code>False</code>). The default value is <code>false</code>. Available in API version 59.0 and later.
IsUnreadByOwner	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If true, lead has been assigned, but not yet viewed. See Unread Leads for more information. Label is Unread By Owner.
Jigsaw	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description References the ID of a contact in Data.com. If a lead has a value in this field, it means that a contact was imported as a lead from Data.com. If the contact (converted to a lead) wasn't imported from Data.com, the field value is null. Maximum size is 20 characters. Available in API version 22.0 and later. Label is Data.com Key.  Important: The <code>Jigsaw</code> field is exposed in the API to support troubleshooting for import errors and reimporting of corrected data. Don't modify the value in the <code>Jigsaw</code> field.
JigsawContactId	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The ID of the contact in reference to Jigsaw.  Important: The Jigsaw field is exposed in the API to support troubleshooting for import errors and reimporting of corrected data. Don't modify the value in the Jigsaw field.
LastActivityDate	Type date Properties Filter, Group, Nillable, Sort Description Value is the most recent of either: • Due date of the most recent event logged against the record. • Due date of the most recently closed task associated with the record.
LastName	Type string Properties Create, Filter, Group, Sort, Update Description Required. Last name of the lead up to 80 characters.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
LastViewedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.

Field	Details
Latitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>Longitude</code> to specify the precise geolocation of an address. Acceptable values are numbers between –90 and 90 up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations
LeadSource	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The origin or source of the lead.
Longitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>Latitude</code> to specify the precise geolocation of an address. Acceptable values are numbers between –180 and 180 up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations.
MasterRecordId	Type reference Properties Filter, Group, Nillable, Sort Description If this record was deleted as the result of a merge, this field contains the ID of the record that was kept. If this record was deleted for any other reason, or hasn't been deleted, the value is <code>null</code>. When using Apex triggers to determine which record was deleted in a merge event, this field's value is the ID of the record that remains in <code>Trigger.old</code>. In <code>Trigger.new</code>, the value is <code>null</code>. This is a relationship field. Relationship Name MasterRecord Relationship Type Lookup

Field	Details
	Refers To Lead
MiddleName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The lead's middle name. Maximum size is 40 characters.
MobilePhone	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description The lead's mobile phone number.
Name	Type string Properties Filter, Group, Sort Description Concatenation of <code>FirstName</code> , <code>MiddleName</code> , <code>LastName</code> , and <code>Suffix</code> up to 203 characters, including whitespaces.
NumberOfEmployees	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Number of employees at the lead's company. Label is Employees .
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the lead's owner. This is a polymorphic relationship field. Relationship Name Owner

Field	Details
	Relationship Type Lookup
	Refers To Group, User
PartnerAccountId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description ID of the partner account for the partner user that owns this lead. Available if Partner Relationship Management is enabled or if digital experiences is enabled and you have partner portal licenses. In API version 16.0 and later, the <code>Partner Account</code> field is set to the appropriate account for the partner user that owns the lead. If the owner of the lead isn't a partner user, this field has no value.
Phone	Type phone
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The lead's phone number.
PhotoUrl	Type url
	Properties Filter, Group, Nillable, Sort
	Description Path to be combined with the URL of a Salesforce instance (<i>Example:</i> <code>https://yourInstance.salesforce.com/</code>) to generate a URL to request the social network profile image associated with the lead. Generated URL returns an HTTP redirect (code 302) to the social network profile image for the lead.
PostalCode	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Postal code for the address of the lead. Label is Zip/Postal Code .

Field	Details
Pronouns	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The lead's personal pronouns, reflecting their gender identity. Others can use these pronouns to refer to the lead in the third person. The entry is selected from a picklist of available values, which the administrator sets. Maximum 40 characters. Possible values are: • He/Him • He/They • Not Listed • She/Her • She/They • They/Them
Rating	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Rating of the lead.
RecordTypeId	Type reference Properties Create, Filter, Nillable, Update Description ID of the record type assigned to this object.
Salutation	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Salutation for the lead.
ScheduledResumeDateTime	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The date and time when the action cadence tracker is going to resume after it's paused or on a wait step. This field is available in API version 54.0 and later when the Sales Engagement license is enabled. To see this field, the user also needs the Sales Engagement User or Sales Engagement Quick Cadence Creator user permission set.
ScoreIntelligenceId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the intelligent field record that contains lead score.
State	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description State for the address of the lead.
StateCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO state code for the lead's address.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Status code for this converted lead. Status codes are defined in <code>Status</code> and represented in the API by the <code>LeadStatus</code> object.
Street	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Street number and name for the address of the lead.

Field	Details
Suffix	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The lead's name suffix. Maximum size is 40 characters.
Title	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Title for the lead, such as CFO or CEO. The maximum size is 128 characters. When converting a lead to a person account, the conversion fails if the lead Title field contains more than 80 characters.
Website	Type url Properties Create, Filter, Group, Nillable, Sort, Update Description Website for the lead.



Note: When importing lead data, users need the Set Audit Fields upon Record Creation permission to assign values to audit fields such as `CreatedDate`. Audit fields are automatically updated during API operations unless you set these fields yourself.

Converted Leads

Leads have a special state to indicate that they've been converted into an account, a contact, and an opportunity. Your client application can convert leads via the `convertLead()` call. Users can also convert leads in Salesforce. After a lead has been converted, it's read only. However, you can query converted lead records. Only users with the View and Edit Converted Leads permission can update converted lead records.

Leads have several fields that indicate their converted status. These special fields are set when converting the lead in the user interface.

- `ConvertedAccountId`
- `ConvertedContactId`
- `ConvertedDate`
- `ConvertedOpportunityId`
- `IsConverted`
- `Status`

Unread Leads

Leads have a special state to indicate that they haven't been viewed or edited by the lead owner. In Salesforce, it's helpful for users to know which leads have been assigned to them but that they haven't touched yet. `IsUnreadByOwner` is `true` if the lead owner hasn't yet viewed or edited the lead, and `false` if the lead owner has viewed or edited the lead at least one time.

Lead Status Picklist

Each `Status` value corresponds to either a converted or unconverted status in the lead status picklist, as defined in the user interface. To obtain the lead status values in the picklist, a client application can query `LeadStatus`.

You can't convert a lead via the API by changing `Status` to one of the converted lead status values. When you convert qualified leads into an account, contact, and opportunity, you can select one of the converted status types for the lead. Leads with a converted status type are no longer available in the Leads tab, although you can include them in reports.

Usage

If lead data is imported and you need to set the value for an audit field, such as `CreatedDate`, contact Salesforce Support. Audit fields are automatically updated during API operations unless you request to set these fields yourself.

To update a lead or to convert one with `convertLead()`, log in to your client application with the Edit permission on leads.

When you create, update, or upsert a lead, your client application can have the lead assigned to multiple user records based on assignment rules that have been configured in Salesforce.

To use this feature, your client application needs to set either of these options (but not both) in the `AssignmentRuleHeader` used in create or update:

Field	Field Type	Details
<code>assignmentRuleId</code>	reference	ID of the assignment rule to use. Can be an inactive assignment rule. If unspecified and <code>useDefaultRule</code> is <code>true</code> , then the default assignment rule is used. To find the ID for a given assignment rule, query the <code>AssignmentRule</code> object (specifying <code>RuleType="leadAssignment"</code>), iterate through the returned <code>AssignmentRule</code> records, find the one you want to use, retrieve its ID, and then specify its ID in this field in the <code>AssignmentRuleHeader</code> .
<code>useDefaultRule</code>	boolean	Specifies whether to use the default rule for rule-based assignment (<code>true</code>) or not (<code>false</code>). Default rules are assigned in the user interface.

Java Sample

The following Java sample shows how to automatically assign a newly created lead.

```
package wsc;

import com.sforce.soap.enterprise.Connector;
import com.sforce.soap.enterprise.EnterpriseConnection;
import com.sforce.ws.ConnectionException;
import com.sforce.ws.ConnectorConfig;
import com.sforce.soap.enterprise.sobject.Lead;
```

```
import com.sforce.soap.enterprise.QueryResult;
import com.sforce.soap.enterprise.SaveResult;
import com.sforce.soap.enterprise.sobject.SObject;

public class LeadAssignment {

    static final String USERNAME = "REPLACE USER NAME";
    static final String PASSWORD = "REPLACE PASSWORD";
    static EnterpriseConnection connection;

    static LeadAssignment _leadAssignment;

    // Main
    public static void main(String[] args)
    {
        // Establish connection and login
        ConnectorConfig config = new ConnectorConfig();
        config.setUsername(USERNAME);
        config.setPassword(PASSWORD);
        try {
            connection = Connector.newConnection(config);
            System.out.println("Logged in, endpoint: " + config.getAuthEndpoint());
        } catch (ConnectionException e1) {
            e1.printStackTrace();
        }

        // Create lead
        _leadAssignment = new LeadAssignment();
        try {
            _leadAssignment.CreateLead();
        } catch (Exception e) {
            e.printStackTrace();
        }

        // Logout
        try {
            connection.logout();
            System.out.println("Logged out");
        } catch (ConnectionException ce) {
            ce.printStackTrace();
        }
    }

    public void CreateLead() throws ConnectionException
    {
        // Create a new Lead and assign various properties
        Lead lead = new Lead();

        lead.setFirstName("Joe");
        lead.setLastName("Smith");
        lead.setCompany("ABC Corporation");
        lead.setLeadSource("API");
        // The lead assignment rule will assign any new leads that
        // have "API" as the LeadSource to a particular user
    }
}
```

```

// In this sample we will look for a particular rule and if found
// use the id for the lead assignment. If it is not found we will
// instruct the call to use the current default rule. You can't use
// both of these values together.
QueryResult qr = connection.query("SELECT Id FROM AssignmentRule WHERE Name = " +

                                "'Mass Mail Campaign' AND SubjectType = 'Lead'");
if (qr.getSize() == 0) {
    connection.setAssignmentRuleHeader(null, true);
} else {
    connection.setAssignmentRuleHeader(qr.getRecords()[0].getId(), false);
}

// Every operation that results in a new or updated lead will
// use the specified rule until the header is removed from the
// connection.
SaveResult[] sr = connection.create(new SObject[] {lead});
for (int i=0;i<sr.length;i++) {
    if (sr[i].isSuccess()) {
        System.out.println("Successfully created lead with id of: " +
                           sr[i].getId() + ".");
    } else {
        System.out.println("Error creating lead: " +
                           sr[i].getErrors()[0].getMessage());
    }
}

// This call effectively removes the header, the next lead will
// be assigned to the default lead owner.
connection.clearAssignmentRuleHeader();
}
}

```

C# Sample

The following C# sample shows how to automatically assign a newly created lead.

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using System.Threading.Tasks;
using System.ServiceModel;
using LeadSample.sforce;

namespace LeadSample
{
    class LeadAssignment
    {
        private static SoapClient client;
        private static SoapClient apiClient;
        private static SessionHeader header;
        private static LoginResult loginResult;
    }
}

```

```

private static readonly string Username = "REPLACE USERNAME";
private static readonly string Password = "REPLACE PASSWORD AND SECURITY TOKEN";

// Create the proxy binding and login
private LeadAssignment()
{
    client = new SoapClient();

    try
    {
        loginResult = client.login(null, Username, Password);
    }
    catch (Exception e)
    {
        Console.WriteLine("Unexpected login error: " + e.Message);
        Console.WriteLine(e.StackTrace);
        return;
    }

    // Access API endpoint and create new client
    header = new SessionHeader();
    header.sessionId = loginResult.sessionId;
    apiClient = new SoapClient("Soap", loginResult.serverUrl);
}

[STAThread]
static void Main(string[] args)
{
    LeadAssignment leadAssignment = new LeadAssignment();
    try
    {
        {
            leadAssignment.CreateLead();
        }
        catch (Exception e)
        {
            Console.WriteLine(e.Message);
            Console.WriteLine(e.StackTrace);
            Console.WriteLine(e.InnerException);
        }
        // logout
        client.logout(header);
    }

    public void CreateLead()
    {
        // Create a new Lead and assign various properties
        Lead lead = new Lead();

        lead.FirstName = "John";
        lead.LastName = "Brown";
        lead.Company = "ABC Corporation";
        lead.LeadSource = "Advertisement";
        // Setting the lead source for a pre-existing lead assignment rule. This
        // rule was created outside of this sample and will assign any new leads
        // that have "Advertisement" as the LeadSource to a particular user.
    }
}

```

```

// Create the assignment rule header and add it to the proxy binding
AssignmentRuleHeader arh = new AssignmentRuleHeader();

// In this sample we will look for a particular rule and if found
// use the id for the lead assignment. If it is not found we will
// instruct the call to use the current default rule. Both these
// values can't be used together.
QueryResult qr = null;
string query = "SELECT Id FROM AssignmentRule WHERE Name = " +
    "'Mass Mail Campaign' AND SubjectType = 'Lead'";
try
{
    LimitInfo[] limitArray = apiClient.query(
        header, // sessionheader
        null,   // queryoptions
        null,   // mruheader
        null,   // packageversionheader
        query,  // SOQL query
        out qr);
}
catch (Exception e)
{
    Console.WriteLine("Unexpected query error: " + e.Message);
    Console.WriteLine(e.StackTrace);
}
if (qr.size == 0)
{
    arh.useDefaultRule = true;
}
else
{
    arh.assignmentRuleId = qr.records[0].Id;
}

// Create the lead using our Assignment Rule header
LimitInfo[] li;
SaveResult[] sr;
apiClient.create(
    header, // sessionheader
    arh,    // assignmentruleheader
    null,   // mruheader
    null,   // allowfieldtruncationheader
    null,   // disablefeedtrackingheader
    null,   // streamingenabledheader
    null,   // allornoneheader
    null,   // duplicateruleheader
    null,   // localeoptions
    null,   // debuggingheader
    null,   // packageversionheader
    null,   // emailheader
    new sObject[] { lead },
    out li,
    out sr);

```



```
foreach (SaveResult s in sr)
{
    if (s.success)
    {
        Console.WriteLine("Successfully created Lead with ID: {0}", s.id);
    }
    else
    {
        Console.WriteLine("Error creating Lead: {0}", s.errors[0].message);
    }
}
}
```

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

LeadChangeEvent (API version 44.0)

Change events are available for the object.

LeadFeed (API version 18.0)

Feed tracking is available for the object.

LeadHistory

History is available for tracked fields of the object.

LeadOwnerSharingRule

Sharing rules are available for the object.

LeadShare

Sharing is available for the object.

SEE ALSO:

[LeadOwnerSharingRule](#)

[LeadShare](#)

[LeadStatus](#)

[PartnerNetworkConnection](#)

LeadCleanInfo

Stores the metadata Data.com Clean uses to determine a lead record's clean status. Helps you automate the cleaning or related processing of lead records.



Note: When your Data.com Prospector or Data.com Clean contract expires, Data.com features, objects, and fields will be removed from your org.

To support customers' needs around compliance and to remain a leader in trust and privacy, Salesforce removed all contact data from the Data.com service on February 1, 2021.

For more information, see [Data.com Prospector and Clean Retirement](#).

Lead Clean Info provides a snapshot of the data in your Salesforce lead record and its matched Data.com record at the time the Salesforce record was cleaned.

Lead Clean Info includes a number of bit vector fields, whose component fields each correspond to individual object fields and provide related data or status information about those fields. For example, the bit vector field `IsDifferent` has an `IsDifferentTitle` field. If the `IsDifferentTitle` field's value is `False`, that means the `Title` field value is *the same* on the Salesforce lead record and its matched Data.com record.

LeadCleanInfo bit vector fields include:

- `CleanedBy` indicates who (a user) or what (a Clean job) cleaned the lead record.
- `IsDifferent` indicates whether or not a field on the lead record has a value that differs from the corresponding field on the matched Data.com record.
- `IsFlaggedWrong` indicates whether or not a field on the lead record has a value that is flagged as wrong to Data.com.
- `IsReviewed` indicates whether or not a field on the lead record is in a `Reviewed` state, which means that the value was reviewed but not accepted..

Their individual bits are defined here

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Fields

Field Name	Details
Address	Type address Properties Filter, Nillable Description The compound form of the address. Read-only. See Address Compound Fields for details on compound address fields.
AnnualRevenue	Type currency Properties Filter, Nillable, Sort Description Estimated annual revenue of the lead.
City	Type string Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description Details for the billing address of the lead.
CleanedByJob	Type boolean Properties Filter Description Indicates whether the lead record was cleaned by a Data.com Clean job (<code>true</code>) or not (<code>false</code>).
CleanedByUser	Type boolean Properties Filter Description Indicates whether the lead record was cleaned by a Salesforce user (<code>true</code>) or not (<code>false</code>).
CompanyDunsNumber	Type string Properties Filter, Group, Nillable, Sort Description The Data Universal Numbering System (D-U-N-S) number is a unique, nine-digit number assigned to every business location in the Dun & Bradstreet database that has a unique, separate, and distinct operation. D-U-N-S numbers are used by industries and organizations around the world as a global standard for business identification and tracking.
CompanyName	Type string Properties Filter, Group, Nillable, Sort Description The name of the company.
ContactStatusDataDotCom	Type picklist Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description The status of the contact associated with the lead per Data.com. Values are: Contact is Active per Data.com, Phone is Wrong per Data.com , Email is Wrong per Data.com, Phone and Email are Wrong per Data.com, Contact Not at Company per Data.com, Contact is Inactive per Data.com, Company this contact belongs to is out of business per Data.com, Company this contact belongs to never existed per Data.com or Email address is invalid per Data.com.
Country	Type string Properties Filter, Group, Nillable, Sort Description Details for the billing address of the lead.
DandBCompanyDunsNumber	Type string Properties Filter, Group, Nillable, Sort Description The D-U-N-S Number on the D&B Company record (if any) that is linked to the lead.
DataDotComCompanyId	Type string Properties Filter, Group, Nillable, Sort Description The ID Data.com maintains for the company associated with the lead.
DataDotComId	Type string Properties Filter, Group, Nillable, Sort Description The ID Data.com maintains for the contact associated with the lead.
Email	Type email

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description The lead's email address.
FirstName	Type string Properties Filter, Group, Nillable, Sort Description The lead's first name.
Industry	Type picklist Properties Filter, Group, Nillable, Sort Description The industry the lead belongs to.
IsDifferentAnnualRevenue	Type boolean Properties Filter Description Indicates whether the lead's <code>AnnualRevenue</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
IsDifferentCity	Type boolean Properties Filter Description Indicates whether the lead's <code>City</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
IsDifferentCompanyDunsNumber	Type boolean Properties Filter

Field Name	Details
	Description Indicates whether the lead's <code>Company D-U-N-S Number</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentCompanyName</code>	Type boolean Properties Filter Description Indicates whether the lead's <code>Company Name</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentCountry</code>	Type boolean Properties Filter Description Indicates whether the lead's <code>Country</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentCountryCode</code>	Type boolean Properties Filter Description Indicates whether the account's <code>Country Code</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentDandBCompanyDunsNumber</code>	Type boolean Properties Filter Description Indicates whether the lead's <code>D&B Company D-U-N-S Number</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentEmail</code>	Type boolean Properties Filter

Field Name	Details
	Description Indicates whether the lead's <code>Email</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentFirstName</code>	Type boolean Properties Filter Description Indicates whether the lead's <code>First Name</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentIndustry</code>	Type boolean Properties Filter Description Indicates whether the lead's <code>Industry</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentLastName</code>	Type boolean Properties Filter Description Indicates whether the lead's <code>Last Name</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentNumberOfEmployees</code>	Type boolean Properties Filter Description Indicates whether the lead's <code>No. of Employees</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentPhone</code>	Type boolean Properties Filter

Field Name	Details
	Description Indicates whether the lead's <code>Phone</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentPostalCode</code>	Type boolean Properties Filter Description Indicates whether the lead's <code>Postal Code</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentState</code>	Type boolean Properties Filter Description Indicates whether the lead's <code>State</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentStateCode</code>	Type boolean Properties Filter Description Indicates whether the account's <code>State Code</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentStreet</code>	Type boolean Properties Filter Description Indicates whether the lead's <code>Street</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsDifferentTitle</code>	Type boolean Properties Filter

Field Name	Details
	Description Indicates whether the lead's <code>Title</code> field value is different from the corresponding value on its matched Data.com record (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongAddress</code>	Type boolean Properties Filter, Update Description Indicates whether the lead's <code>Address</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongAnnualRevenue</code>	Type boolean Properties Filter, Update Description Indicates whether the lead's <code>Annual Revenue</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongCompanyDunsNumber</code>	Type boolean Properties Filter, Update Description Indicates whether the lead's <code>Company D-U-N-S Number</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongCompanyName</code>	Type boolean Properties Filter, Update Description Indicates whether the lead's <code>Company Name</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongEmail</code>	Type boolean Properties Filter, Update

Field Name	Details
	Description Indicates whether the lead's <code>Email</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongIndustry</code>	Type boolean Properties Filter, Update Description Indicates whether the lead's <code>Industry</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongName</code>	Type boolean Properties Filter, Update Description Indicates whether the lead's <code>Name</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongNumberOfEmployees</code>	Type boolean Properties Filter, Update Description Indicates whether the lead's <code>No. of Employees</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongPhone</code>	Type boolean Properties Filter, Update Description Indicates whether the lead's <code>Phone</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsFlaggedWrongTitle</code>	Type boolean Properties Filter, Update

Field Name	Details
	Description Indicates whether the lead's <code>Title</code> field value is flagged as wrong to Data.com (<code>true</code>) or not (<code>false</code>).
<code>IsInactive</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the lead has been reported to Data.com as <i>Inactive</i> (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedAddress</code>	Type boolean Properties Filter, Update Description Indicates whether the lead's <code>Address</code> field value is in a <i>Reviewed</i> state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedAnnualRevenue</code>	Type boolean Properties Filter, Update Description Indicates whether the lead's <code>Annual Revenue</code> field value is in a <i>Reviewed</i> state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedCompanyDunsNumber</code>	Type boolean Properties Filter, Update Description Indicates whether the lead's <code>Company D-U-N-S Number</code> field value is in a <i>Reviewed</i> state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedCompanyName</code>	Type boolean Properties Filter, Update

Field Name	Details
	Description Indicates whether the lead's <code>Company Name</code> field value is in a <code>Reviewed</code> state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedDandBCompanyDunsNumber</code>	Type boolean Properties Filter, Update Description Indicates whether the lead's <code>D&B Company D-U-N-S Number</code> field value is in a <code>Reviewed</code> state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedEmail</code>	Type boolean Properties Filter, Update Description Indicates whether the lead's <code>Email</code> field value is in a <code>Reviewed</code> state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedIndustry</code>	Type boolean Properties Filter, Update Description Indicates whether the lead's <code>Industry</code> field value is in a <code>Reviewed</code> state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedName</code>	Type boolean Properties Filter, Update Description Indicates whether the lead's <code>Name</code> field value is in a <code>Reviewed</code> state (<code>true</code>) or not (<code>false</code>).
<code>IsReviewedNumberOfEmployees</code>	Type boolean Properties Filter, Update

Field Name	Details
	Description Indicates whether the lead's No. of Employees field value is in a Reviewed state (true) or not (false).
IsReviewedPhone	Type boolean Properties Filter, Update Description Indicates whether the lead's Phone field value is in a Reviewed state (true) or not (false).
IsReviewedTitle	Type boolean Properties Filter, Update Description Indicates whether the lead's Title field value is in a Reviewed state (true) or not (false).
LastMatchedDate	Type dateTime Properties Filter, Sort Description The date the lead record was last matched and linked to a Data.com record.
LastName	Type string Properties Filter, Group, Nillable, Sort Description The lead's last name.
LastStatusChangedById	Type reference Properties Filter, Group, Nillable, Sort Description The ID of who or what last changed the record's Clean Status field value: a Salesforce user or a Clean job.

Field Name	Details
LastStatusChangedDate	Type dateTime Properties Filter, Nillable, Sort Description The date on which the record's <code>Clean Status</code> field value was last changed.
Latitude	Type double Properties Filter, Nillable, Sort Description Used with <code>Longitude</code> to specify the precise geolocation of a billing address. Data not currently provided.
LeadId	Type reference Properties Filter, Group, Sort Description The unique, system-generated ID assigned when the lead record was created.
Longitude	Type double Properties Filter, Nillable, Sort Description Used with <code>Latitude</code> to specify the precise geolocation of a billing address. Data not currently provided.
Name	Type string Properties Filter, Group, Sort, Update Description Field label is Lead Clean Info Name. The name of the lead. Maximum size is 255 characters.
NumberOfEmployees	Type int Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description The number of employees working at the lead.
Phone	Type phone Properties Filter, Group, Nillable, Sort Description The phone number for the lead.
PostalCode	Type string Properties Filter, Group, Nillable, Sort Description Details for the billing address of the lead.
State	Type string Properties Filter, Group, Nillable, Sort Description Details for the billing address of the lead.
Street	Type textarea Properties Filter, Group, Nillable, Sort Description Details for the billing address of the lead.
Title	Type string Properties Filter, Group, Nillable, Sort Description The lead's title.

Usage

Developers can create triggers that read the Lead Clean Info fields to help automate the cleaning or related processing of lead records.

LeadDailyMetric

Represents the daily engagement metrics for a lead. This object is available in API version 52.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Inbox must be enabled.

Fields

Field	Details
<code>AllCallsCallBackLater</code>	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the day for this lead with the call result Call Back Later.
<code>AllCallsLeftVoicemail</code>	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the day for this lead with the call result Left Voicemail.
<code>AllCallsMeaningfulConnect</code>	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the day for this lead with the call result Meaningful Connect.
<code>AllCallsNotInterested</code>	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the day for this lead with the call result Not Interested.

Field	Details
AllCallsUncategorized	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the day for this lead with no call result specified.
AllCallsUnqualified	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the day for this lead with the call result Unqualified.
AllEmailsBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The total of hard and soft bounced emails for this lead in the day. This is a calculated field.
AllEmailsDeliveredCount	Type int Properties Filter, Group, Nillable, Sort Description The number of successfully delivered emails for this lead in the day. This is a calculated field.
AllEmailsDeliveredRate	Type percent Properties Filter, Nillable, Sort Description The percentage of tracked emails sent that were successfully delivered to this lead. This field is a calculated field. Available in API version 54.0 and later.
AllEmailsHardBouncedCount	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The number of hard bounced emails for this lead in the day.
AllEmailsOutOfOfficeCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails that triggered an out of office reply for this lead in the day.
AllEmailsSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this lead in the day. This is a calculated field.
AllEmailsSoftBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails soft bounced for this lead in the day.
AllEmailsTrackedSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this lead with engagement tracking enabled in the day.
AllEmailsUntrackedSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this lead without engagement tracking enabled in the day.

Field	Details
AllTotalCallsCount	Type int Properties Filter, Group, Nillable, Sort Description The total number of calls to this lead with all call results in the day. This is a calculated field.
DailyCutOffTimeStamp	Type dateTime Properties Filter, Sort Description The time of day when each 24-hour metrics period starts and ends.
Date	Type date Properties Filter, Group, Sort Description The date on which the engagement occurred.
DateInt	Type int Properties Filter, Group, idLookup, Sort Description The date on which the engagement occurred, in yyymmdd format.
HardBounceTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this lead with hard bounce tracking. Available in API version 54.0 and later.
InboundEngagementsCount	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of inbound engagements for this lead in the day. This field is a calculated field. The value is the sum of UniqueEmailsOpenedCount, UniqueEmailsRepliedCount, and UniqueEmailsLinkClickedCount. Available in API version 58.0 and later.
LeadId	Type reference Properties Filter, Group, Sort Description The ID of the related lead. This is a relationship field. Relationship Name Lead Relationship Type Lookup Refers To Lead
LinkClickTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this lead with link click tracking. Available in API version 54.0 and later.
OpenTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this lead with open tracking. Available in API version 54.0 and later.
OutOfOfficeTrackableSends	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of emails sent to this lead with out-of-office tracking. Available in API version 54.0 and later.
OutboundEngagementsCount	Type int Properties Filter, Group, Nillable, Sort Description The number of outbound engagements for this lead in the day. This field is a calculated field. The value is the sum of AllTotalCallsCount and AllEmailsDeliveredCount. Available in API version 58.0 and later.
ReplyTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this lead with reply tracking. Available in API version 54.0 and later.
SoftBounceTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this lead with soft bounce tracking. Available in API version 54.0 and later.
TrackableSendHardBounceRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this lead with hard bounce tracking that hard bounced. This field is a calculated field. Available in API version 54.0 and later.
TrackableSendLinkClickRate	Type percent

Field	Details
	Properties Filter, Nillable, Sort Description The percentage of emails sent to this lead with link tracking that had link clicks. This field is a calculated field. Available in API version 54.0 and later.
TrackableSendOpenRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this lead with open tracking that were opened by the recipient. This field is a calculated field. Available in API version 54.0 and later.
TrackableSendOutOfOfficeRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this lead with out-of-office tracking that received out-of-office replies. This field is a calculated field. Available in API version 54.0 and later.
TrackableSendReplyRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this lead with reply tracking that received replies. This field is a calculated field. Available in API version 54.0 and later.
TrackableSendSoftBounceRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this lead with soft bounce tracking that soft bounced. This field is a calculated field.

Field	Details
	Available in API version 54.0 and later.
UniqueEmailsLinkClickedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of individual emails in which the lead clicked a link in the day.
UniqueEmailsOpenedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of individual emails opened by the lead in the day.
UniqueEmailsRepliedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of individual emails replied to by the lead in the day.

LeadMonthlyMetric

Represents the monthly engagement metrics for a lead. This object is available in API version 52.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Inbox must be enabled.

Fields

Field	Details
AllCallsCallBackLater	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this lead with the call result Call Back Later.
AllCallsLeftVoicemail	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this lead with the call result Left Voicemail.
AllCallsMeaningfulConnect	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this lead with the call result Meaningful Connect.
AllCallsNotInterested	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this lead with the call result Not Interested.
AllCallsUncategorized	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this lead with no call result specified.
AllCallsUnqualified	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this lead with the call result Unqualified.
AllEmailsBouncedCount	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The total of hard and soft bounced emails for this lead in the month. This is a calculated field.
AllEmailsDeliveredCount	Type int Properties Filter, Group, Nillable, Sort Description The number of successfully delivered emails for this lead in the month. This is a calculated field.
AllEmailsDeliveredRate	Type percent Properties Filter, Nillable, Sort Description The percentage of tracked emails sent that were successfully delivered to this lead. This field is a calculated field. This is a calculated field. Available in API version 54.0 and later.
AllEmailsHardBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of hard bounced emails for this lead in the month.
AllEmailsOutOfOfficeCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails that triggered an out of office reply for this lead in the month.
AllEmailsSentCount	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The number of emails sent to this lead in the month. This is a calculated field.
AllEmailsSoftBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails soft bounced for this lead in the month.
AllEmailsTrackedSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this lead with engagement tracking enabled in the month.
AllEmailsUntrackedSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this lead without engagement tracking enabled in the month.
AllTotalCallsCount	Type int Properties Filter, Group, Nillable, Sort Description The total number of calls to this lead with all call results in the month. This is a calculated field.
HardBounceTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this lead with hard bounce tracking.

Field	Details
	Available in API version 54.0 and later.
LeadId	Type reference Properties Filter, Group, Sort Description The ID of the related lead. This is a relationship field. Relationship Name Lead Relationship Type Lookup Refers To Lead
LinkClickTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this lead with link click tracking. Available in API version 54.0 and later.
Month	Type date Properties Filter, Group, Sort Description The month in which the engagement occurred.
MonthInt	Type int Properties Filter, Group, idLookup, Sort Description The month in which the engagement occurred, in yyyy-mm format.
OpenTrackableSends	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The number of emails sent to this lead with open tracking. Available in API version 54.0 and later.
OutOfOfficeTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this lead with out-of-office tracking. Available in API version 54.0 and later.
ReplyTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this lead with reply tracking. Available in API version 54.0 and later.
SoftBounceTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent to this lead with soft bounce tracking. Available in API version 54.0 and later.
TrackableSendHardBounceRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this lead with hard bounce tracking that hard bounced. This field is a calculated field. Available in API version 54.0 and later.
TrackableSendLinkClickRate	Type percent

Field	Details
	Properties Filter, Nillable, Sort Description The percentage of emails sent to this lead with link tracking that had link clicks. This field is a calculated field. Available in API version 54.0 and later.
TrackableSendOpenRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this lead with open tracking that were opened by the recipient. This field is a calculated field. Available in API version 54.0 and later.
TrackableSendOutOfOfficeRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this lead with out-of-office tracking that received out-of-office replies. This field is a calculated field. Available in API version 54.0 and later.
TrackableSendReplyRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this lead with reply tracking that received replies. This field is a calculated field. Available in API version 54.0 and later.
TrackableSendSoftBounceRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to this lead with soft bounce tracking that soft bounced. This field is a calculated field.

Field	Details
	Available in API version 54.0 and later.
UniqueEmailsLinkClickedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of individual emails in which the lead clicked a link in the month.
UniqueEmailsOpenedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of individual emails opened by the lead in the month.
UniqueEmailsRepliedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of individual emails replied to by the lead in the month.

LeadOwnerSharingRule

Represents the rules for sharing a lead with users other than the owner.

 **Note:** To enable access to this object, contact Salesforce customer support. However, we recommend that you instead use Metadata API to programmatically update owner sharing rules because it triggers automatic sharing rule recalculation. The [SharingRules](#) Metadata API type is enabled for all orgs.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
Description	Type textarea

Field	Details
	Properties Create, Filter, Nillable, Sort, Update Description A description of the sharing rule. Maximum size is 1000 characters. This field is available in API version 29.0 and later.
DeveloperName	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Corresponds to Rule Name in the user interface. This field is available in API version 24.0 and later.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
GroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the source group. Leads owned by users in the source group trigger the rule to give access.
LeadAccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A value that represents the type of sharing being allowed. The possible values are: • Read • Edit
Name	Type string

Field	Details
	Properties Create, Filter, Group, Sort, Update Description Label of the sharing rule as it appears in the user interface. Limited to 80 characters. Corresponds to Label on the user interface.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the target user or group. The target user or group is being given access.

Usage

Use these objects to manage the sharing rules for leads. General sharing and Territory-related sharing use this object.

SEE ALSO:

[Lead](#)

[LeadShare](#)

[LeadStatus](#)

[Metadata API Developer Guide: SharingRules](#)

LeadShare

Represents a sharing entry on a Lead.

You can only create, edit, and delete sharing entries for standard objects whose `RowCause` field is set to `Manual`. Sharing entries for standard objects with different `RowCause` values are created as a result of your Salesforce org's sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren't stored at all.



Note: While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it's possible that we'll stop storing certain share records to improve performance. As a best practice, don't create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, only users with access to the Lead object can access this object.

Fields

The properties available for some fields depend on the default org-wide sharing settings. The properties listed are true for the default settings of such fields.

Field	Details
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
LeadAccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Level of access that the User or Group has to the Lead. The possible values are: • Read • Edit • All This value is not valid when creating or updating these records. This field must be set to an access level that is higher than the organization's default access level for leads.
LeadId	Type reference Properties Create, Filter, Group, Sort Description ID of the Lead associated with this sharing entry. This field can't be updated. This is a relationship field. Relationship Name Lead Relationship Type Lookup Refers To Lead
RowCause	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is <code>Manual</code>. If no value is specified, the field defaults to <code>Manual</code>. All other <code>RowCause</code> values are read-only. After the sharing entry is created, this field can't be edited. Values include: • <code>Manual</code>—The User or Group has access because a user with "All" access manually shared the Lead with them. • <code>Owner</code>—The User is the owner of the Lead. • <code>Rule</code>—The User or Group has access via a Lead sharing rule. • <code>GuestRule</code>—The User or Group has access via a Lead guest user sharing rule. • <code>ImpImplicit</code>—The User has access to records owned by high-volume Experience Cloud site users via a share group. • <code>ARImplicit</code>—The User, who belongs to a partner or customer account, has access to the Lead via an account relationship data sharing rule.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the User or Group that has been given access to the Lead. This field can't be updated. This is a polymorphic relationship field. Relationship Name UserOrGroup Relationship Type Lookup Refers To Group, User

Usage

This object allows you to determine which users and groups can view or edit leads owned by other users.

If you attempt to create a record that matches an existing record, the existing record is returned.

SEE ALSO:

- [AccountShare](#)
- [Case](#)
- [CaseShare](#)
- [OpportunityShare](#)

LeadStatus

Represents the status of a Lead record, such as Open, Qualified, or Converted.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. Because changing terms in our code can break current implementations, we maintained this object’s name.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
ApiName	Type string Properties Filter, Group, idLookup, Sort Description Uniquely identifies a picklist value so it can be retrieved without using an id or primary label.
IsConverted	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this lead status value represents a converted lead (<code>true</code>) or not (<code>false</code>). Multiple lead status values can represent a converted lead.
IsDefault	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Indicates whether this is the default lead status value (<code>true</code>) or not (<code>false</code>) in the picklist.
MasterLabel	Type string Properties Filter, Group, Nillable, Sort Description Label for this lead status value. This display value is the internal label that does not get translated.
SortOrder	Type int Properties Filter, Group, Nillable, Sort Description Number used to sort this value in the lead status picklist. These numbers are not guaranteed to be sequential, as some previous lead status values might have been deleted.

Usage

This object represents a value in the lead status picklist (see [Lead](#) on page 3068). The lead status picklist provides additional information about the status of a [Lead](#) on page 3068, such as whether a given status value represents a converted [Lead](#) on page 3068. Query this object to retrieve the set of values in the lead status picklist, and then use that information while processing [Lead](#) on page 3068 objects to determine more information about a given lead. For example, the application could test whether a given lead is converted based on its Status value and the value of the `IsConverted` property in the associated LeadStatus record.

SEE ALSO:

[LeadOwnerSharingRule](#)

[LeadShare](#)

LeadTag

Associates a word or short phrase with a Lead.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
ItemId	Type reference Properties Create, Filter Description ID of the tagged item.
Name	Type string Properties Create, Filter Description Name of the tag. If this value does not already exist, a new TagDefinition is created and becomes the parent of this Tag object. Otherwise, a TagDefinition with the same name becomes the parent of this Tag object. Parent relationships are created automatically.
TagDefinitionId	Type reference Properties Filter Description ID of the parent TagDefinition object that owns the tag.
Type	Type picklist Properties Create, Filter, Restricted picklist Description Defines the visibility of a tag. Valid values: • Public—The tag can be viewed and manipulated by all users in an organization. • Personal—The tag can be viewed or manipulated only by a user with a matching OwnerId.

Usage

LeadTag stores the relationship between its parent TagDefinition and the Lead being tagged. Tag objects act as metadata, allowing users to describe and organize their data.

When a tag is deleted, its parent TagDefinition will also be deleted if the name is not being used; otherwise, the parent remains. Deleting a TagDefinition sends it to the Recycle Bin, along with any associated tag entries.

LearningContent

Represents a Trailhead or enablement site (myTrailhead) module assigned to a user in Workforce Engagement or Learning Paths. This object also represents a Trailhead module or video in an Enablement program exercise. This object is available in API version 54.0 and later.

Supported Calls

`describeObjects()`, `query()`

Special Access Rules

- The org must have a Workforce Engagement license.
- The user must have at least one Workforce Engagement permission set assigned to them: Workforce Engagement Admin, Workforce Engagement Analyst, Workforce Engagement Planner, Workforce Engagement Agent.
- For an enablement site (myTrailhead) module, the org must have a Sales Enablement license.
- For a Trailhead module or video in an Enablement program, the org must have an Enablement license.

Fields

Field	Details
ApiName	Type string Properties Filter, Group, Nillable Description The module's human-readable API name, such as <code>pure-aloe-sales-strategies</code> .
AvailablePointCount	Type int Properties Group, Nillable Description The maximum points that a user can earn on their profile by completing the module. This value is the sum of points that the content creator assigns to the module's units.
ContainsAssessmentType	Type picklist Properties Filter, Group, Nillable, Restricted picklist

Field	Details
	Description Specifies the type of assessment that the content's units include. Possible values are: • <code>MultipleChoiceQuiz</code>—All the content's units have multiple-choice quizzes. • <code>HandsOnChallenge</code>—At least one unit has a hands-on challenge.
ContentType	Type picklist Properties Filter, Group, Nillable, Restricted picklist Description The type of content assigned to the user. Possible values are: • <code>All</code>—The content is any supported type. • <code>Module</code>—The content is a Trailhead or enablement site (myTrailhead) module. • <code>VideoLesson</code>—The content is a video that's specified in the Enablement workspace in Digital Experiences and is used in an Enablement program.
ContentUrl	Type url Properties Group, Nillable Description The absolute URL to the content, such as https://purplemy.trailhead.com/en/content/sales-team-enablement/modules/purple-sales-strategies
Description	Type string Properties Nillable Description The module's description.
DurationCount	Type int Properties Group, Nillable Description The total time, in minutes, for a learner to complete all units in the module. This value is the sum of the estimated times that the content creator assigns to the module's units.

Field	Details
ExternalId	Type string Properties Filter, Group, Nillable, Sort Description The GUID that Trailhead uses to reference the module.
ImageUrl	Type url Properties Group, Nillable Description The absolute URL to the module's badge art image file.
IsPublic	Type boolean Properties Defaulted on create, Filter, Group Description Indicates whether the content is public Trailhead content (<code>true</code>) or private enablement site (myTrailhead) content (<code>false</code>). The default value is <code>false</code>.
Title	Type string Properties Filter, Group, Nillable, Sort Description The module's title.

SEE ALSO:

[PersonTraining](#)

LearningItem

Represents an item that requires users to take action, including a Learning Paths entry, an Enablement program, or an exercise with linked content in an Enablement program. For Learning Paths, users are assigned a learning item to complete. For Enablement programs and exercises, users are assigned a program or can self-enroll in shared programs. This object is available in API version 58.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

- For Enablement admins to create, update, and delete Enablement programs, the Design and Deliver Enablement Programs permission is required. This permission is enabled by default as part of the Manage Enablement Essentials permission set, which comes with the Enablement add-on license.
- For users who take Enablement programs, the Take Enablement Programs permission is required. This permission is enabled by default as part of the Use Enablement Programs permission set, which comes with the Enablement add-on license.
- For partner users who take Partner Enablement programs, the Take Partner Enablement Programs permission is required. This permission is enabled by default as part of the Use Partner Enablement Programs permission set, which comes with the Enablement add-on license. Partner Enablement also requires a [supported Partner Relationship Management \(PRM\) add-on license](#).

Fields

Field	Details
CustomLearningItemId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of a learning item type record if this learning item represents a custom exercise type in an Enablement program. This field is required when the <code>Type</code> field's value is <code>CustomContent</code>. This field is a relationship field. Available in API version 62.0 and later. Relationship Name CustomLearningItemType Relationship Type Lookup Refers To LearningItemType
EnablementProgramId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of an Enablement program that contains the outcome, milestone, or exercise. This field is a relationship field.

Field	Details
	Relationship Name EnablementProgram Relationship Type Lookup Refers To EnablementProgram
LearningContentId	Type string Properties Filter, Group, Nillable, Sort Description The ID of the record that represents a Trailhead module or video in a sales program exercise. This field is a relationship field. Relationship Name LearningContent Refers To LearningContent
OwnerId	Type reference Properties Filter, Group, Sort Description ID of the owner of the program. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
StandardCustomContentMetadata	Type textarea Properties Nillable Description Reserved for future use.
StandardCustomLearningItemType	Type picklist

Field	Details
	Properties Filter, Group, Nillable, Restricted picklist, Sort Description Reserved for future use.
Type	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of learning item. Possible values are: • CustomContent—Custom exercise content in an Enablement program, such as a screen flow, content from external repositories, or other custom content sources. Available in API version 62.0 and later. • EnablementProgram • LearningContent—Trailhead module • LearningLesson—Lesson exercise in an Enablement program • LearningLink—Audio Recording, Document, Scheduled Event, or Other exercise in an Enablement program • LearningPractice—Feedback Request exercise in an Enablement program • StandardCustomContent—Standard Custom exercise content in an Enablement program. Reserved for future use.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

LearningItemOwnerSharingRule on page 65 (API version 60.0)

Sharing rules are available for the object.

LearningItemShare on page 67 (API version 60.0)

Sharing is available for the object.

LearningItemAssignment

Represents the assignment of a Learning Paths entry to users or groups or the enrollment of an Enablement program for a specific user. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

- For Enablement admins to create, update, and delete Enablement programs, the Design and Deliver Enablement Programs permission is required. This permission is enabled by default as part of the Manage Enablement Essentials permission set, which comes with the Enablement add-on license.
- For users who take Enablement programs, the Take Enablement Programs permission is required. This permission is enabled by default as part of the Use Enablement Programs permission set, which comes with the Enablement add-on license.
- For partner users who take Partner Enablement programs, the Take Partner Enablement Programs permission is required. This permission is enabled by default as part of the Use Partner Enablement Programs permission set, which comes with the Enablement add-on license. Partner Enablement also requires a [supported Partner Relationship Management \(PRM\) add-on license](#).

Fields

Field	Details
AssigneeId	Type reference Properties Create, Filter, Group, Sort Description The ID of the user or group assigned to the learning item. This field is a relationship field. Relationship Name Assignee Relationship Type Lookup Refers To User
AssignmentStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The status of assigning an Enablement program to a user. Possible values are: • Failed • InProgress • Succeeded
DueDate	Type date Properties Filter, Group, Nillable, Sort

Field	Details
	Description The date that the assignment is due for the user or group.
EnrollmentType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The type of enrollment for a user in an Enablement program. Possible values are: - Assigned - SelfEnrolled
IsOverdue	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the assigned learning item is overdue (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . This field is a calculated field.
LearningItemId	Type reference Properties Create, Filter, Group, Sort Description The ID of the learning item. This field is a relationship field. Relationship Name LearningItem Relationship Type Lookup Refers To LearningItem
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort Description ID of the user who assigned the learning item. This field is a polymorphic relationship field.

Field	Details
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
ProgressId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description The ID of record that represents a user's progress towards completing an assigned learning item, such as a Learning Paths entry or sales program. This field is a relationship field.
	Relationship Name Progress
	Refers To LearningItemProgress
StartDate	Type date
	Properties Create, Filter, Group, Nillable, Sort
	Description The date that the learning item was assigned to the user or group.

Usage

You can assign a learning item to a user programmatically by querying the program and user, and then inserting a record into LearningItemAssignment.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[LearningItemAssignmentOwnerSharingRule](#) on page 65 (API version 60.0)

Sharing rules are available for the object.

[LearningItemAssignmentShare](#) on page 67 (API version 60.0)

Sharing is available for the object.

LearningItemProgress

Represents the progress that a user has made towards completing an assigned learning item, such as a Learning Paths entry or Enablement program. This object is available in API version 60.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

- For Enablement admins to create, update, and delete Enablement programs, the Design and Deliver Enablement Programs permission is required. This permission is enabled by default as part of the Manage Enablement Essentials permission set, which comes with the Enablement add-on license.
- For users who take Enablement programs, the Take Enablement Programs permission is required. This permission is enabled by default as part of the Use Enablement Programs permission set, which comes with the Enablement add-on license.
- For partner users who take Partner Enablement programs, the Take Partner Enablement Programs permission is required. This permission is enabled by default as part of the Use Partner Enablement Programs permission set, which comes with the Enablement add-on license. Partner Enablement also requires a [supported Partner Relationship Management \(PRM\) add-on license](#).

Fields

Field	Details
CompletedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the user completed the learning item.
CompletedOnDay	Type int Properties Filter, Group, Nillable, Sort Description Number of days that the user took to complete the learning item.
CompletedPercent	Type percent Properties Filter, Sort Description Percentage of the learning item that's complete.

Field	Details
DaysInProgress	Type int Properties Nillable Description Number of days that have elapsed since the learning item was assigned.
LearningItemId	Type reference Properties Filter, Group, Sort Description The ID of the learning item. This field is a relationship field. Relationship Name LearningItem Relationship Type Lookup Refers To LearningItem
OwnerId	Type reference Properties Filter, Group, Sort Description ID of the owner of the learning item. This field is a relationship field. Relationship Name Owner Relationship Type Lookup Refers To User
ProgressStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Status of the learning item assignment. Possible values are: • Behind • Completed

Field	Details
	- CompletedLate - CompletedOnTime - InProgress - NoLongerTracking - NotStarted - OnTrack - Overdue For details, see Completion Statuses in Enablement Analytics.
StartDate	Type dateTime Properties Filter, Nillable, Sort Description The date when a user starts a Trailhead exercise in a sales program.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[LearningItemProgressChangeEvent](#) on page 68

Change events are available for the object.

[LearningItemProgressOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[LearningItemProgressShare](#) on page 67

Sharing is available for the object.

LearningItemSubmission

Represents a link to a resource, such as a video recording, that a user submits as part of a Feedback Request exercise in an Enablement program. For peer and manager feedback, this resource can be a recording of a user's sales patch. For Einstein Coach feedback, this resource can be a video call, and Einstein generates feedback from the call's transcription. This object is available in API version 59.0 and later, but Einstein Coach is available only in API version 61.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

A learning item submission record is created when users take an Enablement program that includes a Feedback Request exercise for peer and manager feedback.

- For Enablement admins to create, update, and delete Enablement programs, the Design and Deliver Enablement Programs permission is required. This permission is enabled by default as part of the Manage Enablement Essentials permission set, which comes with the Enablement add-on license.
- For users who take Enablement programs, the Take Enablement Programs permission is required. This permission is enabled by default as part of the Use Enablement Programs permission set, which comes with the Enablement add-on license.
- To access exercises that use Einstein Coach, the Use Einstein Coach permission is required. This permission is enabled by default as part of the Access Einstein Coach permission set, which comes with the Enablement add-on license.

Fields

Field	Details
CallId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the video call that a user submits for Einstein Coach feedback. Einstein generates feedback for the user based on the call's transcription. This field is a polymorphic relationship field. Available in API version 61.0 and later. Relationship Name Call Relationship Type Lookup Refers To VideoCall
LearningItemId	Type reference Properties Filter, Group, Sort Description The ID of the LearningItem record for the Feedback Request exercise, where the <code>Type</code> of the learning item is <code>LearningPractice</code>. This field is a relationship field. Relationship Name LearningItem Relationship Type Lookup

Field	Details
	Refers To LearningItem
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the owner of the learning item submission. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
Url	Type url Properties Filter, Nillable, Sort Description URL of the content that a user submits for peer and manager feedback. For example, a link to a video recording of a sales rep's practice pitch.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[LearningItemSubmissionOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[LearningItemSubmissionShare](#) on page 67

Sharing is available for the object.

LearningItemType

Represents a custom exercise type that an Enablement user takes in an Enablement program in the Guidance Center. A custom exercise type also requires a corresponding LearningItem record for the Guidance Center and corresponding EnblProgramTaskDefinition and EnblProgramTaskSubCategory records for when admins create a program in Program Builder. This object is available in API version 62.0 and later.

Supported Calls

`delete()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

- For Enablement admins to create, update, and delete Enablement programs, the Design and Deliver Enablement Programs permission is required. This permission is enabled by default as part of the Manage Enablement Essentials permission set, which comes with the Enablement add-on license.
- For users who take Enablement programs, the Take Enablement Programs permission is required. This permission is enabled by default as part of the Use Enablement Programs permission set, which comes with the Enablement add-on license.

 **Important:** Custom exercises aren't compatible with Partner Enablement programs.

Fields

Field	Details
<code>ApexEvaluationHandlerId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the Apex class that specifies how progress and completion of the custom exercise is assessed when users take the program in the Guidance Center. This field is a relationship field. Relationship Name ApexEvaluationHandler Refers To ApexClass
<code>ApexSerializerDeserializerId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the Apex class that specifies how data related to the custom exercise type is retrieved and deployed with change sets or managed packages. This field is a relationship field. Relationship Name ApexSerializerDeserializer Refers To ApexClass

Field	Details
CustomField	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The programmatic name of a custom lookup field on the LearningItem object that references the custom object used with this custom exercise. Add values to this picklist when you implement a custom exercise type. For example, if a custom exercise type shows a screen flow, maybe the custom object's name is <code>ScreenFlow_Object__c</code> and the custom field on <code>LearningItem</code> is named <code>ScreenFlow_Field__c</code>. For details, see Implement Custom Exercise Types for Enablement Programs in the <i>Sales Programs and Partner Tracks with Enablement Developer Guide</i>. This field is unique within your organization.
CustomObject	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The programmatic name of the custom object used with this custom exercise. Add values to this picklist when you implement a custom exercise type. For example, if a custom exercise type shows a Quip document, maybe the custom object's name is <code>ScreenFlow_Object__c</code>. For details, see Implement Custom Exercise Types for Enablement Programs in the <i>Sales Programs and Partner Tracks with Enablement Developer Guide</i>. This field is unique within your organization.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. The name: • must be 40 characters or fewer • must begin with a letter • can contain only underscores and alphanumeric characters • can't include spaces • can't end with an underscore • can't contain 2 consecutive underscores

Field	Details
	In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.
Icon	Type textarea Properties Create, Update Description The icon to use for the custom exercise type in the Guidance Center. Use the format iconType:iconName, where the values correspond to icon categories and names from the Salesforce Lightning Design System. • iconType is the type of icon, such as <code>standard</code> or <code>doctype</code>. • iconName is the icon name, such as <code>flow</code> or <code>slide</code>. For example, to use the Standard type Flow icon, this value is <code>standard:flow</code>.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Reserved for future use. Don't edit this field.
LightningComponentName	Type string Properties Filter, Nillable, Sort Description The name, including the namespace, of the Lightning Web Component (LWC) used to show the custom exercise's content when a user opens the exercise in the Guidance Center. For example, if the LWC for a screen flow custom exercise is named <code>screenFlowViewer</code>, this value is <code>c:screenFlowViewer</code>. This field can only be accessed from Metadata API and its value is derived from the <code>lightningComponentDefinition</code> field on the LearningItemType metadata type.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Label for this LearningItemType value. This display value is the internal label that doesn't get translated.

Field	Details
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that aren't Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.

LearningPractice

Represents a Feedback Request exercise in an Enablement program. Users can submit a sample of their work and request feedback from their peers and managers. Or, users can submit a video call and Einstein Coach generates feedback from the call's transcription. This object is available in API version 59.0 and later, but Einstein Coach feedback is available only in API version 61.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

- For Enablement admins to create, update, and delete Enablement programs, the Design and Deliver Enablement Programs permission is required. This permission is enabled by default as part of the Manage Enablement Essentials permission set, which comes with the Enablement add-on license.
- For users who take Enablement programs, the Take Enablement Programs permission is required. This permission is enabled by default as part of the Use Enablement Programs permission set, which comes with the Enablement add-on license.
- To access exercises that use Einstein Coach, the Use Einstein Coach permission is required. This permission is enabled by default as part of the Access Einstein Coach permission set, which comes with the Enablement add-on license.

Fields

Field	Details
Description	Type string Properties Filter, Sort Description Instructions to the user to provide context for completing the Feedback Request exercise. For example, Record yourself giving a sales pitch and request feedback from your peers.
InviteeQuantity	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The number of peers or managers that the user is required to invite for giving feedback when Type is PeerFeedback. Each peer or manager receives an invitation to the assessment survey associated with the Feedback Request exercise. When Type is AIFeedback, this value is always 1.
LearningItemId	Type reference Properties Filter, Group, Sort Description The ID of the LearningItem record for the Feedback Request exercise. The value must be unique. This field is a relationship field. Relationship Name LearningItem Relationship Type Lookup Refers To LearningItem
Name	Type string Properties Filter, Group, idLookup, Sort Description The title of the Feedback Request exercise. For example, Practice Your Sales Pitch.

Field	Details
PromptTemplate	Type string Properties Filter, Group, Nillable, Sort Description The prompt template to use with this exercise when <code>Type</code> is <code>AIFeedback</code>. Available in API version 61.0 and later.
SurveyId	Type reference Properties Filter, Group, Sort Description The ID of the assessment survey that's sent to peers and managers when <code>Type</code> is <code>PeerFeedback</code>. This field is a relationship field. Relationship Name Survey Relationship Type Lookup Refers To Survey
Type	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The type of feedback used with this exercise. Possible values are: • <code>AIFeedback</code>—Users submit a video call, and Einstein Coach generates feedback from the call's transcription. With this type, <code>PromptTemplate</code> is required. Available in API version 61.0 and later. • <code>PeerFeedback</code>—Users submit a URL to a sample of their work, and select peers and managers to review their work. Selected peers and managers complete an assessment survey. With this type, <code>SurveyId</code> is required. Available in API version 61.0 and later. • <code>Survey</code>—Users complete a survey as part of their enrolled employee enablement program. Available in API version 64.0 and later.

LegalEntity

Represents the way an organization is structured. An organization can be a single legal entity or it can comprise more than one legal entity. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available with the Salesforce Billing managed package and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
CompanyName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the company that this legal entity represents.
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the legal entity.
LastReferencedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type datetime

Field	Details
	Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
LegalEntityAddress	Type address Properties Filter, Nillable Description The address of the company that this legal entity represents. This field is a compound field of type Address and combines these fields: LegalEntityCity, LegalEntityCountry, LegalEntityGeocodeAccuracy, LegalEntityLatitude, LegalEntityLongitude, LegalEntityPostalCode, LegalEntityState, and LegalEntityStreet. For more information, see Address Compound Fields.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the legal entity.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the record owner.
Status	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The status of the legal entity. Possible values are: • Active • Inactive

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

[LegalEntityFeed](#)

Feed tracking is available for the object.

[LegalEntityHistory](#)

History is available for tracked fields of the object.

[LegalEntityOwnerSharingRule](#)

Sharing rules are available for the object.

[LegalEntityShare](#)

Sharing is available for the object.

LicenseDefinitionCustomPermission (Developer Preview)

Represents a licensed custom permission that controls access to a license's features when included in a custom permission set license definition. This object is available in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access `LicenseDefinitionCustomPermission`, you must have the Partner Licensing Platform developer preview enabled. To participate in this developer preview, submit a participation request via the [Partner Licensing Platform Developer Preview](#) Partner Community group.

 **Note:** The Partner Licensing Platform is available as a developer preview. The Partner Licensing Platform isn't generally available unless or until Salesforce announces its general availability in documentation or in press releases or public statements. All commands, parameters, and other features are subject to change or deprecation at any time, with or without notice. Don't implement functionality developed with these commands or tools in your production package.

Fields

Field	Details
<code>LicenseDefinitionId</code>	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the custom permission set license definition that contains the licensed custom permission. This is a relationship field.

Field	Details
	Relationship Name LicenseDefinition
	Relationship Type Lookup
	Refers To PermissionSetLicenseDefinition
LicensedCustomPermissionId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description ID of the licensed custom permission that you're including in the permission set license definition. On the CustomPermission object, the <code>isLicensed</code> field must equal true. This is a relationship field.
	Relationship Name LicensedCustomPermission
	Relationship Type Lookup
	Refers To CustomPermission

Usage

For more information, see the [Partner Licensing Platform Developer Guide \(Developer Preview\)](#).

LightningErrorEventLog

Lightning Error events represent errors that occurred during user interactions with Lightning Experience and the Salesforce mobile app. This object is available in API version 64.0 and later.



Note: This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
AppName	Type string Properties Filter, Group, Nillable, Sort Description The name of the application that the user accessed.
BrowserName	Type string Properties Filter, Group, Nillable, Sort Description The name of the browser that the user accessed. Example Chrome, Safari
BrowserVersion	Type string Properties Filter, Group, Nillable, Sort Description The version of the browser that the user accessed in <code>major.minor version</code> format. Some browsers don't provide a minor version.
ClientGeolocation	Type string Properties Filter, Group, Nillable, Sort Description The geolocation of the client in the form of <code><Country>/<State Province></code>. Example United States/California
ClientIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The API client ID.

Field	Details
ClientIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP".
ComponentName	Type string Properties Filter, Group, Nillable, Sort Description The internal name of the standard component that generated the error. The Salesforce developer assigned the name when the standard component was created.
ConnectionType	Type string Properties Filter, Group, Nillable, Sort Description The type of connection.
DeviceIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique identifier used to identify a device when tracking events. <code>DEVICE_ID</code> is a generated value that's created when the mobile app is initially run after installation.
DeviceModel	Type string Properties Filter, Group, Nillable, Sort Description The name of the device model. Example iPad, iPhone
DevicePlatform	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The type of application experience in <code>name:experience:form</code> format.
DeviceSessionIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique identifier of the user's session based on page load time. If the user reloads a page, it starts a new session.
ErrorMessage	Type string Properties Filter, Group, Nillable, Sort Description The error message generated.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a user's login session. It starts with a login event and ends with either a logout event or the user session expiring.
MobileSdkAppType	Type string Properties Filter, Group, Nillable, Sort Description The mobile application type.
MobileSdkVersion	Type string Properties Filter, Group, Nillable, Sort Description Mobile SDK version number.

Field	Details
OperatingSystemName	Type string Properties Filter, Group, Nillable, Sort Description The operating system name. Example Android, iOS, OSX, Windows
OperatingSystemVersion	Type string Properties Filter, Group, Nillable, Sort Description The operating system version.
PageAppName	Type string Properties Filter, Group, Nillable, Sort Description The internal name of the application that the user accessed from the App Launcher.
PageContext	Type string Properties Filter, Group, Nillable, Sort Description Context of the page where the event occurred.
PageObjectIdentifier	Type string Properties Filter, Group, Nillable, Sort Description Unique entity ID of event.
PageObjectType	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The entity type of event
PageStartTime	Type dateTime Properties Filter, Nillable, Sort Description Time when page was initially loaded
PageUrl	Type string Properties Filter, Group, Nillable, Sort Description Relative URL of the top-level Lightning Experience or Salesforce mobile app page that the user opened. The page can contain one or more Lightning components.
PreviousPageUrl	Type string Properties Filter, Group, Nillable, Sort Description The relative URL of the previous Lightning Experience or Salesforce mobile app page that the user opened
RequestIdIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code> .
SdkAppVersion	Type string Properties Filter, Group, Nillable, Sort Description The mobile SDK application version number.

Field	Details
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all events in Lightning Experience within a session. When a user logs out and logs in again, a new session is started.
StackTrace	Type string Properties Filter, Group, Nillable, Sort Description The stack trace contains the location in the code where the error occurred along with the calling frames that led to the error.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Example 20130715233322.670
UiEventIdentifier	Type string Properties Filter, Group, Nillable, Sort Description ID of the Lightning event type.
UiEventSequenceNumber	Type double Properties Filter, Nillable, Sort Description The sequence number of current event since start of session.
UiEventSource	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Examples Here are some examples of error flags returned in this field. • AuraError • Error • InvalidStateError • RangeError • ReferenceError • SecurityError • SyntaxError • TypeError • unknown
UiEventTimestamp	Type dateTime Properties Filter, Nillable, Sort Description The time at which this event occurred, measured in milliseconds.
UiEventType	Type string Properties Filter, Group, Nillable, Sort Description The type of error event.
UserAgent	Type string Properties Filter, Group, Nillable, Sort Description The numeric code for the type of client used to make the request (for example, browser, application, or API) as a string.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user accessing Salesforce services through the UI or API.

Field	Details
UserType	Type string Properties Filter, Group, Nillable, Sort Description The category of user license of the user accessing Salesforce services through the UI or API.

LightningExperienceTheme

Represents information for a theme in Lightning Experience. This object is available in API Version 42.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
DefaultBrandingSetId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the default branding set. This is a relationship field. Relationship Name DefaultBrandingSet Relationship Type Lookup Refers To BrandingSet
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description The description of the theme. Limit: 1,000 characters.

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the theme in the API. This name can contain only underscores and alphanumeric characters and must be unique in your organization. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. The label corresponds to the theme name in the user interface. Limit: 70 characters.  Note: When creating large sets of data, always specify a unique DeveloperName for each record. If no DeveloperName is specified, performance slows down while Salesforce generates one for each record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Required. Language of the label. Possible values are: • da (Danish) • de (German) • en_US (English) • es (Spanish) • es_MX (Spanish - Mexico) • fi (Finnish) • fr (French) • it (Italian) • ja (Japanese) • ko (Korean) • nl_NL (Dutch) • no (Norwegian) • pt_BR (Portuguese (Brazil)) • ru (Russian) • sv (Swedish) • th (Thai) • zh_CN (Chinese - Simplified) • zh_TW (Chinese - Traditional)

Field	Details
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Required. The name of the theme. Specify up to 70 characters.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. - In Developer Edition orgs, NamespacePrefix is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. - In orgs that are not Developer Edition orgs, NamespacePrefix is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
ShouldOverrideLoadingImage	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether a custom image overrides the Salesforce loading image (true) or not (false).

LightningLoggerEventLog

Lightning Logger Event Log provides information from observed Lightning component logs. This object is available in API version 61.0 and later.



Note: This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
AppName	Type string Properties Filter, Group, Nillable, Sort Description The name of the application the user accessed.
BrowserName	Type string Properties Filter, Group, Nillable, Sort Description The name of the browser the user accessed.
BrowserVersion	Type string Properties Filter, Group, Nillable, Sort Description The user's browser version in major.minor format. Some browsers don't provide a minor version.
ClientGeolocation	Type string Properties Filter, Group, Nillable, Sort Description The geolocation of the client in the form of <Country>/<State Province>.
ClientIdentifier	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The API client ID.
ClientIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.
ConnectionType	Type string Properties Filter, Group, Nillable, Sort Description The type of connection.Possible values are: • CDMA1x • CDMA • EDGE • EVDO0 • EVDOA • EVDOB • GPRS • HRPD • HSDPA • HSUPA • LTE • WIFI
DeviceModel	Type string Properties Filter, Group, Nillable, Sort Description The name of the device model. For example: iPad, iPhone.
DevicePlatform	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The type of application experience in name:experience:form format. Possible values are: Name • APP_BUILDER • CUSTOM • S1 • SFX Experience • BROWSER • HYBRID Form • DESKTOP • PHONE • TABLET
DeviceSessionIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique identifier of the user's session is based on page load time. When the user reloads a page, a new session starts. For example: 321a1ddfaf924803a075f1e69fc87bc06f53ccd0
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCSym5eyvtEK2I.
Message	Type string Properties Filter, Nillable, Sort

Field	Details
	Description The message is passed to the <code>lightning/logger log()</code> method. The message can be a JSON object or a string.
MobileSdkAppType	Type string Properties Filter, Group, Nillable, Sort Description The mobile SDK application type. Possible Values: • HYBRID • HYBRIDLOCAL • HYBRIDREMOTE • NATIVE • REACTNATIVE
MobileSdkVersion	Type string Properties Filter, Group, Nillable, Sort Description The mobile SDK application version number. For example, 5.0.
OperatingSystemName	Type string Properties Filter, Group, Nillable, Sort Description The operating system name, derived from the <code>User Agent</code>. For example: • Android • iOS • OSX • Windows
OperatingSystemVersion	Type string Properties Filter, Group, Nillable, Sort Description The operating system version, derived from the <code>User Agent</code>.

Field	Details
PageContext	Type string Properties Filter, Group, Nillable, Sort Description The name of the component hosting the main content of the page. For example: clients:cardsContainer.
PageObjectIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique entity identifier of the event. For example: 0013000000I3zJAAAZ.
PageObjectType	Type string Properties Filter, Group, Nillable, Sort Description The object type of the event. For example: task, contacts.
PageUrl	Type string Properties Filter, Group, Nillable, Sort Description Relative URL of the top-level Lightning Experience or Salesforce mobile app page that the user opened. The page can contain one or more Lightning components. Multiple record IDs can be associated with <code>PageUrl</code>. For example: /sObject/0064100000JXITSAA5/view.
RequestIdIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestIdIdentifier</code>. For example: 3nWgxWbDKWWDIk0FKfF5DV.
SdkAppVersion	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The app version used in this request.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
UiRootActivityIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID for the root activity, if any, when this message was logged.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.
UserType	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description Type of user employing Salesforce services, whether through the UI or API.

LightningOnboardingConfig

Represents the feedback provided when users switch from Lightning Experience to Salesforce Classic. Admins can customize the question, how frequently the form appears, and where the feedback is stored in Chatter from the Adoption Assistance page in Lightning Experience Setup. Available in API version 47.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. Because changing terms in our code can break current implementations, we maintained this object's name.

See [Switch to Salesforce Classic Feedback Form](#) in Salesforce Help for more details.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
CollaborationGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the Chatter Group where the user feedback is posted. This is a relationship field. Relationship Name CollaborationGroup Relationship Type Lookup Refers To CollaborationGroup
CustomQuestion	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Text of the custom question added by the admin. Maximum of 1,000 characters.

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.  Note: When creating large sets of data, always specify a unique DeveloperName for each record. If no DeveloperName is specified, performance slows down while Salesforce generates one for each record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
FeedbackFormDaysFrequency	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of days between showing the feedback form when a user switches. A value of 0 indicates that the form is shown for every switch. Maximum of 30.
IsCustom	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if a feedback form includes a custom question <code>yes</code> or not <code>no</code>.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates the language used in the org where the feedback form was created.
MasterLabel	Type string

Field	Details
	Properties Create, Filter, Group, Sort, Update Description The label for the prompt. Maximum of 80 characters.
PromptDelayTime	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the amount of time in seconds to delay between instances of all prompts, both org- and Salesforce-created. Minimum of 0 hours and 0 minutes. Maximum of 99 hours and 59 minutes.
SendFeedbackToSalesforce	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if the user feedback can be shared with Salesforce. If <code>yes</code> , share the feedback with Salesforce. If <code>no</code> , the feedback is only shared in the Chatter Group chosen when customizing the form. The default value is <code>false</code> .

LightningPageViewEventLog

Lightning Page View event logs represent information about the page on which the event occurred in Lightning Experience and the Salesforce mobile app. A Lightning Page View event log tracks the page a user visited, how long the user spent on the page, and the load time for the page. This object is available in API version 61.0 and later.



Note: This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
AppName	Type string Properties Filter, Group, Nillable, Sort Description The name of the application that the user accessed.
BrowserName	Type string Properties Filter, Group, Nillable, Sort Description The name of the browser that the user accessed. For example: Chrome, IE, Safari, Gecko.
BrowserVersion	Type string Properties Filter, Group, Nillable, Sort Description The version of the browser that the user accessed in <code>major.minor version</code> format. Some browsers don't provide a minor version.
ClientGeolocation	Type string Properties Filter, Group, Nillable, Sort Description The geolocation of the client in the form of <code><Country>/<State Province></code>. For example: <code>United States/California</code>.
ClientIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The API client ID.
ClientIp	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description IP address of the client employing salesforce.com services.
ConnectionType	Type string Properties Filter, Group, Nillable, Sort Description The type of connection. Possible values are: • CDMA1x • CDMA • EDGE • EVDO0 • EVDOA • EVDOB • GPRS • HRPD • HSDPA • HSUPA • LTE • WIFI
DeviceIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique identifier used to identify a device when tracking events. <code>DeviceIdentifier</code> is a generated value that's created when the mobile app is initially run after installation.
DeviceModel	Type string Properties Filter, Group, Nillable, Sort Description The name of the device model. For example: <code>iPad</code>, <code>iPhone</code>.

Field	Details
DevicePlatform	Type string Properties Filter, Group, Nillable, Sort Description The type of application experience in <code>name:experience:form</code> format. Possible values are: Name • APP_BUILDER • CUSTOM • S1 • SFX Experience • BROWSER • HYBRID Form • DESKTOP • PHONE • TABLET
DeviceSessionIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique identifier of the user's session based on page load time. When the user reloads a page, a new session is started. For example: 321a1ddfaf924803a075f1e69fc87bc06f53ccd0.
DoesEffectivePageTimeDeviate	Type boolean Properties Defaulted on create, Filter, Group, Sort Description When a deviation is detected, <code>DoesEffectivePageTimeDeviate</code> records <code>true</code>. The default value is <code>false</code>.
Duration	Type double

Field	Details
	Properties Filter, Nillable, Sort Description The duration in milliseconds since the page start time. This field is being deprecated. Use <code>EffectivePageTime</code> instead.
<code>EffectivePageTime</code>	Type double Properties Filter, Nillable, Sort Description Indicates how many milliseconds it took for the page to load before a user could interact with the page's functionality. Multiple factors can affect effective page time, such as network speed, hardware performance, or page complexity. If an effective page time greater than 60 seconds is detected, the value of this field is set to <code>null</code> or 0.
<code>EffectivePageTimeErrorType</code>	Type string Properties Filter, Group, Nillable, Sort Description Indicates the origin of an error. This field is populated when <code>EFFECTIVE_PAGE_TIME_DEVIATION_REASON</code> contains the <code>PAGE_HAS_ERROR</code> value.
<code>EffectivePageTimeReason</code>	Type string Properties Filter, Group, Nillable, Sort Description The reason for deviation in page loading time. Examples of possible values include: • <code>PageInDom</code>- The page was loaded from a cache • <code>PageHasError</code>- An undefined page loading error occurred.
<code>GrandparentUiElement</code>	Type string Properties Filter, Group, Nillable, Sort Description The grandparent scope of the page element where the event occurred.

Field	Details
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCSym5eyvtEK2I.
MobileSdkAppType	Type string Description The mobile SDK application type. Possible Values • HYBRID • HYBRIDLOCAL • HYBRIDREMOTE • NATIVE • REACTNATIVE
MobileSdkVersion	Type String Description The mobile SDK application version number. Example 5.0
OperatingSystemName	Type string Properties Filter, Group, Nillable, Sort Description The operating system name, derived from UserAgent. For example: Android, iOS, OSX, Windows.
OperatingSystemVersion	Type string Properties Filter, Group, Nillable, Sort Description The operating system version, derived from UserAgent.

Field	Details
PageAppName	Type string Properties Filter, Group, Nillable, Sort Description The internal name of the application that the user accessed from the App Launcher. For example: <code>LightningSales</code>.
PageContext	Type string Properties Filter, Group, Nillable, Sort Description The name of the component hosting the main content of the page. For example: <code>clients:cardsContainer</code>.
PageObjectIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique entity identifier of the event. For example: <code>0013000000I3zJAAAZ</code>.
PageObjectType	Type string Properties Filter, Group, Nillable, Sort Description The object type of the event. For example: <code>task</code>, <code>contacts</code>.
PageStartTime	Type dateTime Properties Filter, Nillable, Sort Description The time when the page was initially loaded, measured in milliseconds. For example: <code>1471564788642</code>.
PageUrl	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description Relative URL of the top-level Lightning Experience or Salesforce mobile app page that the user opened. The page can contain one or more Lightning components. Multiple record IDs can be associated with <code>PageUrl</code>. For example: <code>/sObject/0064100000JXITSAA5/view</code>.
ParentUiElement	Type string Properties Filter, Group, Nillable, Sort Description The parent scope of the page element where the event occurred.
PreviousPageAppName	Type string Properties Filter, Group, Nillable, Sort Description The internal name of the previous application that the user accessed from the App Launcher. For example: <code>LightningSales</code>.
PreviousPageContext	Type string Properties Filter, Group, Nillable, Sort Description The context of the previous page where the event occurred. For example: <code>clients:cardsContainer</code>.
PreviousPageObjectIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique previous page object identifier of the event.
PreviousPageObjectType	Type string Properties Filter, Group, Nillable, Sort Description The previous page object type of the event. For example: <code>task</code>, <code>contacts</code>.

Field	Details
PreviousPageUrl	Type string Properties Filter, Group, Nillable, Sort Description The relative URL of the previous Lightning Experience or Salesforce mobile app page that the user opened. For example: /sObject/006410000.
RequestIdIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestIdIdentifier</code>. For example: 3nWgxWbDKWWDIk0FKfF5DV.
SdkAppVersion	Type string Properties Filter, Group, Nillable, Sort Description The SDK application version number. For example: 5.0.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all events in Lightning Experience within a session. When the user logs out and logs in again, a new session is started. For example: cdd09305cb6babf34059e27f70e47f1b11dec868.
TargetUiElement	Type string Properties Filter, Group, Nillable, Sort Description The target page element where the event occurred. For example: label bBody truncate, tabitem-link.

Field	Details
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
UiEventSequenceNumber	Type double Properties Filter, Nillable, Sort Description An auto-incremented sequence number of the current event since the session started.
UiEventTimestamp	Type dateTime Properties Filter, Nillable, Sort Description An auto-incremented sequence number of the current event since the session started.
UserAgent	Type string Properties Filter, Group, Nillable, Sort Description The numeric code for the type of client used to make the request (for example, the browser, application, or API) as a string.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user accessing Salesforce services through the UI or API. For example: 00530000009M943.
UserType	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The category of user license of the user accessing Salesforce services through the UI or API. Possible values are: • A: Automated Process • b: High Volume Portal • C: Customer Portal User • D: External Who • E: Self Service • G: Guest • L: Package License Manager • N: Salesforce to Salesforce • n: CSN Only • O: Power Custom • o: Custom • P: Partner • p: Customer Portal Manager • S: Standard • X: Salesforce Administrator

LightningPrfmEventLog

Lightning Performance events track trends in Lightning Experience and Salesforce mobile app performance. This object is available in API version 65.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
AppName	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The name of the application that the user accessed.
BrowserName	Type string Properties Filter, Group, Nillable, Sort Description The name of the browser that the user accessed. Example Chrome, Safari
BrowserVersion	Type string Properties Filter, Group, Nillable, Sort Description The version of the browser that the user accessed in <code>major.minor version</code> format. Some browsers don't provide a minor version.
ClientGeolocation	Type string Properties Filter, Group, Nillable, Sort Description The geolocation of the client in the form of <code><Country>/<State Province></code>. Example United States/California
ClientIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The API client ID.
ClientIp	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
ConnectionType	Type string Properties Filter, Group, Nillable, Sort Description The type of connection. Possible Values • CDMA1x • CDMA • EDGE • EVDO0 • EVDOA • EVDOB • GPRS • HRPD • HSDPA • HSUPA • LTE • WIFI
DeviceIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique identifier used to identify a device when tracking events. <code>DEVICE_ID</code> is a generated value that's created when the mobile app is initially run after installation.
DeviceModel	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The name of the device model. Example iPad, iPhone
DevicePlatform	Type string Properties Filter, Group, Nillable, Sort Description The type of application experience in <code>name:experience:form</code> format. Possible Values • <code>name: APP_BUILDER, CUSTOM, S1, SFX</code> • <code>experience: BROWSER, HYBRID</code> • <code>form: DESKTOP, PHONE, TABLET</code>
DeviceSessionIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique identifier of the user's session based on page load time. When the user reloads a page, a new session is started. Example 321a1ddfaf924803a075f1e69fc87bc06f53ccd0
Duration	Type double Properties Filter, Nillable, Sort Description The duration in milliseconds since the page start time.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a user's login session. It starts with a login event and ends with either a logout event or the user session expiring.

Field	Details
	Example GeJCsym5eyvtEK2I
MobileSdkAppType	Type string Properties Filter, Group, Nillable, Sort Description The mobile SDK application type. Possible Values • HYBRID • HYBRIDLOCAL • HYBRIDREMOTE • NATIVE • REACTNATIVE
MobileSdkVersion	Type string Properties Filter, Group, Nillable, Sort Description The mobile SDK application version number.
OperatingSystemName	Type string Properties Filter, Group, Nillable, Sort Description The operating system name, derived from USER_AGENT.
OperatingSystemVersion	Type string Properties Filter, Group, Nillable, Sort Description The operating system version, derived from USER_AGENT.
PageStartTime	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The time when the page was initially loaded, measured in milliseconds.
PageUrl	Type string Properties Filter, Group, Nillable, Sort Description Relative URL of the top-level Lightning Experience or Salesforce mobile app page that the user opened. The page can contain one or more Lightning components.
PreviousPageUrl	Type string Properties Filter, Group, Nillable, Sort Description The relative URL of the previous Lightning Experience or Salesforce mobile app page that the user opened.
RequestIdIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.
SdkAppVersion	Type string Properties Filter, Group, Nillable, Sort Description Mobile SDK application version.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The hash of the session ID to allow tracking of all events in a session.

Field	Details
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT.
UiEventIdentifier	Type string Properties Filter, Group, Nillable, Sort Description Id of the Lightning event type.
UiEventSource	Type string Properties Filter, Group, Nillable, Sort Description The source of the performance event.
UiEventTimestamp	Type dateTime Properties Filter, Nillable, Sort Description Timestamp of when event occurred.
UiEventType	Type string Properties Filter, Group, Nillable, Sort Description The type of performance event.
UserAgent	Type string Properties Filter, Group, Nillable, Sort Description The client user agent string.

Field	Details
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943
UserType	Type string Properties Filter, Group, Nillable, Sort Description The category of user license of the user accessing Salesforce services through the UI or API.

LightningToggleMetrics

Represents users who switched from Lightning Experience back to Salesforce Classic. This object is available in API version 43.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Not available in sandbox orgs.

Fields

Field Name	Details
Action	Type string Properties Filter, Group, Nillable, Sort Description User switched from Lightning Experience to Salesforce Classic or from Salesforce Classic to Lightning Experience.

Field Name	Details
MetricsDate	Type date Properties Filter, Group, Sort Description Date user switched.
RecordCount	Type int Properties Filter, Group, Nillable, Sort Description Number of user switches.
UserId	Type reference Properties Filter, Group, Sort Description UserId of user who switched. This is a relationship field. Relationship Name User Relationship Type Lookup Refers To User

LightningUsageByAppTypeMetrics

Represents number of users on Lightning Experience and Salesforce Mobile. This object is available in API version 43.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Not available in sandbox orgs.

Fields

Field Name	Details
AppExperience	Type string Properties Filter, Group, Nillable, Sort Description User's app (Lightning Experience or Salesforce Mobile).
MetricsDate	Type date Properties Filter, Group, Sort Description Date user accessed Lightning Experience or Salesforce Mobile.
UserId	Type reference Properties Filter, Group, Sort Description UserId for user accessing Lightning Experience or Salesforce Mobile. This is a relationship field. Relationship Name User Relationship Type Lookup Refers To User

LightningUsageByBrowserMetrics

Represents Lightning Experience usage grouped by user's browser. This object is available in API version 43.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Not available in sandbox orgs.

Fields

Field Name	Details
Browser	Type string Properties Filter, Group, Nillable, Sort Description Browser used to access Lightning Experience.
MetricsDate	Type date Properties Filter, Group, Sort Description Date user accessed Lightning Experience.
PageName	Type string Properties Filter, Group, Sort Description Page user viewed in Lightning Experience.
TotalCount	Type int Properties Filter, Group, Nillable, Sort Description Total number of pages accessed in Lightning Experience.

LightningUsageByPageMetrics

Represents standard pages users viewed most frequently in Lightning Experience. This object is available in API version 43.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Not available in sandbox orgs.

Fields

Field Name	Details
MetricsDate	Type date Properties Filter, Group, Sort Description Date user viewed page in Lightning Experience.
PageName	Type string Properties Filter, Group, Nillable, Sort Description Name of page user viewed.
TotalCount	Type int Properties Filter, Group, Nillable, Sort Description Total number of pages viewed.
UserId	Type reference Properties Filter, Group, Sort Description UserId of user who viewed page. This is a relationship field. Relationship Name User Relationship Type Lookup Refers To User

See Also

For more information about `LightningUsageByPageMetrics` syntax and considerations, see [REST API Developer Guide: Lightning Usage by Page](#).

LightningUsageByFlexiPageMetrics

Represents custom pages users viewed most frequently in Lightning Experience. This object is available in API version 43.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Not available in sandbox orgs.

Fields

Field Name	Details
FlexiPageNameOrId	Type string Properties Filter, Group, Nillable, Sort Description Name or Id of custom page user viewed in Lightning Experience.
FlexiPageType	Type string Properties Filter, Group, Sort Description Custom page type.
MetricsDate	Type date Properties Filter, Group, Sort Description Date user viewed page in Lightning Experience.
TotalCount	Type int

Field Name	Details
	Properties Filter, Group, Nillable, Sort
	Description Total number of custom pages viewed.

LightningExitByPageMetrics

Represents frequency metrics about the standard pages within which users switched from Lightning Experience to Salesforce Classic. This object is available in API version 44.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Not available in sandbox orgs.

Fields

Field Name	Details
MetricsDate	Type date
	Properties Filter, Group, Sort
	Description The date that the data was recorded.
PageName	Type string
	Properties Filter, Group, Nillable, Sort
	Description The name of the page from which the user switched from Lightning Experience to Salesforce Classic.
RecordCount	Type int
	Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description The number of records per user and page.
UserId	Type reference Properties Filter, Group, Sort Description UserId of the user who views page. This is a relationship field. Relationship Name User Relationship Type Lookup Refers To User

LinkedArticle

Represents a knowledge article that is attached to a work order, work order line item, or work type. This object is available in API version 37.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Knowledge must be enabled in your org. Field Service must be enabled. Only users that have access to the Knowledge article and the parent record linked to it can access this object.

In Knowledge in Salesforce Classic, only Field Service objects such as Work Order, Work Type, and Work Order Line Item are supported for linked articles. In Lightning Knowledge, other social objects such as Chat, Messaging, Voice Call, and Social Post are supported for linked articles.

To call `update()` to attach or detach articles, enable the Read user permission on the Knowledge object and the Edit user permission on the object whose article you update. Available in API version 58.0 and later.

Fields

Field Name	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
KnowledgeArticleId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the Knowledge article attached to the record. The label in the user interface is Knowledge Article ID.
KnowledgeArticleVersionId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The version of the Knowledge article attached to the record. This field lists the title of the attached version and links to the version. The label in the user interface is Article Version. When you attach an article to a work order, that version of the article stays associated with the work order, even if later versions are published. If needed, you can detach and reattach an article to a work order to link the latest version.
LinkedEntityId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the record that the Knowledge article is attached to. The label in the user interface is Linked Record ID.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update

Field Name	Details
	Description The title of the article. The label in the user interface is Article Title.
RecordTypeId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The ID of the article's record type, if used. This field is only available for Lightning Knowledge.
Type	Type string
	Properties Filter, Group, Nillable, Sort
	Description (Read only) The type of record that the Knowledge article is attached to. For example, work order. The label in the user interface is Linked Object Type.

Usage

Admins can customize linked articles' page layouts, fields, validation rules, and more from the Linked Articles page in Setup.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[LinkedArticleChangeEvent](#) (API version 62.0)

Change events are available for the object.

[LinkedArticleFeed](#)

Feed tracking is available for the object.

[LinkedArticleHistory](#)

History is available for tracked fields of the object.

LinkedArticleFeed

Represents the comment feed on a linked article. This object is available in API version 39.0 and later.

For additional information about feeds, see [FeedItem](#) on page 2549.

Supported Calls

`delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Knowledge must be enabled in your org.

Fields

Field	Details
<code>BestCommentId</code>	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the comment marked as best answer on a question post.
<code>Body</code>	Type textarea Properties Nillable, Sort Description The body of the feed item. Required when <code>Type</code> is <code>TextPost</code> or <code>AdvancedTextPost</code>. Optional when <code>Type</code> is <code>ContentPost</code> or <code>LinkPost</code>. Although a value for <code>Body</code> is not required for the <code>ContentPost</code> type, an attachment is required. If an attachment isn't present, the type changes to <code>TextPost</code> or <code>AdvancedTextPost</code>, depending on the API version. <code>TextPost</code> and <code>AdvancedTextPost</code> do require a value for <code>Body</code>.  Tip: See the IsRichText field for a list of HTML tags supported in the body of rich text posts.
<code>CommentCount</code>	Type int Properties Filter, Group, Sort Description The number of comments associated with this feed item.
<code>InsertedById</code>	Type reference Properties Group, Nillable, Sort Description ID of the user who added this item to the feed. For example, if an application migrates posts and comments from another application into a feed, the <code>InsertedBy</code> value is set to the ID of the context user.

Field	Details
IsRichText	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the feed item <code>Body</code> contains rich text. If you post a rich text feed comment using SOAP API, set <code>IsRichText</code> to <code>true</code> and escape HTML entities from the body. Otherwise, the post is rendered as plain text. Rich text supports the following HTML tags: • <code><p></code>  Tip: Though the <code>
</code> tag isn't supported, you can use <code><p>&nbsp; </p></code> to create lines. • <code><a></code> • <code></code> • <code><code></code> • <code><i></code> • <code><u></code> • <code><s></code> • <code></code> • <code></code> • <code></code> • <code></code> The <code></code> tag is accessible only through the API and must reference files in Salesforce similar to this example: <code></code>  Note: In API version 35.0 and later, the system replaces special characters in rich text with escaped HTML. In API version 34.0 and prior, all rich text appears as a plain-text representation.
LikeCount	Type int Properties Filter, Group, Sort Description The number of likes associated with this feed item.
LinkUrl	Type url Properties Nillable, Sort

Field	Details
	Description The URL of a <code>LinkPost</code> .
<code>ParentId</code>	Type reference Properties Filter, Group, Sort Description ID of the object type to which the feed item is related. For example, set this field to a <code>UserId</code> to post to someone's profile feed, or an <code>AccountId</code> to post to a specific account.
<code>RelatedRecordId</code>	Type reference Properties Group, Nillable, Sort Description ID of the <code>ContentVersion</code> record associated with a <code>ContentPost</code> . For WDC thanks posts, it's the ID of the <code>WorkThanks</code> object associated with a <code>RypplePost</code> . This field is typically null for all posts except <code>ContentPost</code> and <code>RypplePost</code> . For example, set this field to an existing <code>ContentVersion</code> ID and post it to a feed with <code>Type</code> set to <code>ContentPost</code> .
<code>Title</code>	Type string Properties Group, Nillable, Sort Description The title of the feed item. When the <code>Type</code> is <code>LinkPost</code> , the <code>LinkUrl</code> is the URL and this field is the link name. The <code>Title</code> field can be updated on posts of <code>Type</code> <code>QuestionPost</code> .
<code>Type</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of feed item. Except for <code>ContentPost</code> , <code>LinkPost</code> , and <code>TextPost</code> , don't create feed items of other types directly from the API. • <code>ActivityEvent</code>—indirectly generated event when a user or the API adds a Task associated with a feed-enabled parent record (excluding email tasks on cases). Also occurs when a user or the API adds or updates a <code>Task</code> or Event associated with a case record (excluding email and call logging).

Field	Details
	For a recurring Task with CaseFeed disabled, one event is generated for the series only. For a recurring Task with CaseFeed enabled, events are generated for the series and each occurrence. • AdvancedTextPost—created when a user posts a group announcement and, in Lightning Experience as of API version 39.0 and later, when a user shares a post. • AnnouncementPost—Not used. • ApprovalPost—generated when a user submits an approval. • BasicTemplateFeedItem—Not used. • CanvasPost—a post made by a canvas app posted on a feed. • CollaborationGroupCreated—generated when a user creates a public group. • CollaborationGroupUnarchived—Not used. • ContentPost—a post with an attached file. • CreatedRecordEvent—generated when a user creates a record from the publisher. • DashboardComponentAlert—generated when a dashboard metric or gauge exceeds a user-defined threshold. • DashboardComponentSnapshot—created when a user posts a dashboard snapshot on a feed. • LinkPost—a post with an attached URL. • PollPost—a poll posted on a feed. • ProfileSkillPost—generated when a skill is added to a user's Chatter profile. • QuestionPost—generated when a user posts a question. • ReplyPost—generated when Chatter Answers posts a reply. • RypplePost—generated when a user creates a Thanks badge in WDC. • TextPost—a direct text entry on a feed. • TrackedChange—a change or group of changes to a tracked field. • UserStatus—automatically generated when a user adds a post. Deprecated. The following values appear in the <code>Type</code> picklist for all feed objects but apply only to CaseFeed: • AttachArticleEvent—generated event when a user attaches an article to a case. • CallLogPost—generated event when a user logs a call for a case through the user interface. CTI calls also generate this event. • CaseCommentPost—generated event when a user adds a case comment for a case object. • ChangeStatusPost—generated event when a user changes the status of a case. • ChatTranscriptPost—generated event when Chat transcript is saved to a case. • EmailMessageEvent—generated event when an email related to a case object is sent or received. • FacebookPost—generated when a Facebook post is created from a case. Deprecated. • MilestoneEvent—generated when a case milestone is completed or reaches violation status.

Field	Details
	• <code>SocialPost</code>—generated when a social post is created from a case.  Note: If you set <code>Type</code> to <code>ContentPost</code>, also specify <code>ContentData</code> and <code>ContentFileName</code>.

LinkedArticleHistory

Represents the history of changes made to tracked fields on a linked article. This object is available in API version 37.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Special Access Rules

Knowledge must be enabled in your org.

Fields

Field Name	Details
<code>DataType</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Data type of the field that was changed.
<code>Field</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The name of the field that was changed.
<code>LinkedArticleId</code>	Type reference Properties Filter, Group, Sort

Field Name	Details
	Description The ID of the tracked linked article. The history is displayed on the detail page for this record.
NewValue	Type anyType Properties Nillable, Sort Description The new value of the field that was changed.
OldValue	Type anyType Properties Nillable, Sort Description The value of the field before it was changed.

ListEmail

Represents a list email sent from Salesforce, or sent from Account Engagement and synced to Salesforce. When the list email is sent, the recipients are generated by combining recipients in ListEmailIndividualRecipients and ListEmailRecipientSource. Duplicate and other invalid recipients are removed. The result is the recipients sent any given list email. ListEmail has a one-to-many relationship with ListEmailRecipientSource and ListEmailIndividualRecipient. This object is available in API version 41.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ActionCadenceStepId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the action cadence step that generated a list email record. Used for automated emails in Sales Engagement.

Field	Details
	Users must have the Sales Engagement Cadence Creator or Sales Engagement User permission enabled. This field is available in API version 54.0 and later. Relationship Name ActionCadenceStep Relationship Type Lookup Refers To ActionCadenceStep
CampaignId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the related campaign. This field is available in API version 42.0 and later. This is a relationship field. Relationship Name Campaign Relationship Type Lookup Refers To Campaign
ClickThroughRate	Type percent Properties Filter, Nillable, Sort Description The percentage of visitors who click links contained in emails delivered (sent minus bounces) to them. Multiple clicks for a same link are counted. This field is available in API version 41.0 and later. To access this field, your org must use Account Engagement and users need the CRM User or Sales User permission set.
ClickToOpenRatio	Type percent Properties Filter, Nillable, Sort

Field	Details
	Description The number of unique clicks divided by unique HTML opens. This field is available in API version 41.0 and later. To access this field, your org must use Account Engagement and users need the CRM User or Sales User permission set.
DeliveryRate	Type percent Properties Filter, Nillable, Sort Description The percentage of the emails that were delivered compared to the number that bounced (soft and hard). Note: this data includes emails that were delivered to the recipient's spam folder. This field is available in API version 41.0 and later. To access this field, your org must use Account Engagement and users need the CRM User or Sales User permission set.
EmailContentId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the email content record associated with the list email. This field is available in API version 50.0 or later. To access this field, your org must use Account Engagement and users need the CRM User or Sales User permission set.
FromAddress	Type textarea Properties Create, Filter, Update Description Read-only except when the list email is in a draft state. Validated against user's addresses.
FromName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Read-only except when the list email is in a draft state. Validated against user's addresses. This field is null for emails sent from Account Engagement.

Field	Details
HasAttachment	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Read-only. Defaulted on create and update. Value is <code>true</code> if the list email has an attachment. This field is null for emails sent from Account Engagement.
HtmlBody	Type textarea Properties Create, Nillable, Update Description The body of the list email. This field is null for emails sent from Account Engagement. List emails can contain up to 32,000 characters for the body. These limits include visible characters and other characters in the email, including markup.
IsTracked	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates if email tracking was on when the list email was sent. This field is blank for emails sent from Account Engagement and synced to Salesforce. This field is null for emails sent from Account Engagement.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp that indicates when the current user last viewed a record that is related to this list email. This field is null for emails sent from Account Engagement.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (<code>LastReferencedDate</code>) and not viewed. This field is null for emails sent from Account Engagement.

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Read-only except when the list email is in a draft state.
OpenRate	Type percent Properties Filter, Nillable, Sort Description The percentage of unique HTML opens compared to the total number of emails delivered (sent minus bounces). This field is available in API version 41.0 and later. To access this field, your org must use Account Engagement and users need the CRM User or Sales User permission set.
OptOutRate	Type percent Properties Filter, Nillable, Sort Description The percentage of users that have opted out compared to the total number of emails sent. This field is available in API version 41.0 and later. To access this field, your org must use Account Engagement and users need the CRM User or Sales User permission set.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description References Group and User. This field is null for emails sent from Account Engagement. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Field	Details
ProgramName	Type string Properties Filter, Group, Nillable Description The name of an Engagement Studio program where an automated email originates. Reserved for future use. This field is available in API version 46.0 and later. To access this field, your org must use Account Engagement and users need the CRM User or Sales User permission set.
ScheduledDate	Type dateTime Properties CreateFilter, Nillable, Sort, Update Description Read-only. If null and <code>Status</code> is set to <code>Scheduled`</code> defaults to created time.
SentVia	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates whether the email was sent from Salesforce or Account Engagement. The allowed values are <code>Salesforce</code> or <code>Pardot</code> or <code>MessagingService</code>. This field is available in API version 41.0 and later. To access this field, your org must use Account Engagement and users need the CRM User or Sales User permission set.
SpamComplaintRate	Type percent Properties Filter, Nillable, Sort Description The percentage of spam complaints compared to the total number of emails sent. This field is available in API version 41.0 and later. To access this field, your org must use Account Engagement and users need the CRM User or Sales User permission set.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description Read-only except when the list email is in a draft state. Changing the status to Scheduled causes the list email to be sent. Valid values: • Draft • Scheduled • Sent • Limit Error • Canceled • Running
Subject	Type textarea Properties Create, Filter, Nillable, Update Description Read-only except when the list email is in a draft state. This field is null for emails sent from Account Engagement. List emails can contain up to 3,000 characters for the subject. These limits include visible characters and other characters in the email, including markup.
TextBody	Type textarea Properties Create, Nillable, Update Description Read-only except when the list email is in a draft state. This field is null for emails sent from Account Engagement.
TotalDelivered	Type int Properties Filter, Group, Nillable, Sort Description The total number of emails minus hard and soft bounces. Note: this data includes emails that were delivered to the recipient's spam folder. This field is available in API version 41.0 and later. To access this field, your org must use Account Engagement and users need the CRM User or Sales User permission set.

Field	Details
TotalHardBounced	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The total number of emails that permanently bounced back to the sender because the address is invalid. A hard bounce can occur because the domain name doesn't exist or because the recipient is unknown. This field is available in API version 41.0 and later. To access this field, your org must use Account Engagement and users need the CRM User or Sales User permission set.
TotalOpens	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The total number of times a prospect's email client loaded the images in the HTML version of the email. We also record an open if the prospect clicks a link within the HTML or text email without downloading images. A click indicates that they viewed the message. Some email clients (Outlook, Apple Mail, Thunderbird) don't display images by default. Account Engagement counts an open each time the images load. This field is available in API version 41.0 and later. To access this field, users need the Sales Engagement User permission set or your org must use Account Engagement and users need the CRM User or Sales User permission set.
TotalOutOfOffice	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The total number of replies received with an out-of-office message. This field is available in API version 41.0 and later. To access this field, your org must use Account Engagement and users need the Salesforce Engage permission set.
TotalReplies	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The total number of replies received.

Field	Details
	This field is available in API version 41.0 and later. To access this field, your org must use Account Engagement and users need the Salesforce Engage permission set.
TotalSent	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description Read-only. The total number of list emails sent, including bounced, opted-out, and invalid To: addresses.
TotalSoftBounced	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The total number of times a recipient's mail server acknowledged the email, but returned it to the sender. Sometimes it is because the recipient's mailbox is full or the mail server is temporarily unavailable. A soft bounce message can sometimes be deliverable at another time. After 5 soft bounces, Account Engagement opts the prospect out of emails. This field is available in API version 41.0 and later. To access this field, your org must use Account Engagement and users need the CRM User or Sales User permission set.
TotalSpamComplaints	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The total number of prospects that reported the email as spam. This field is available in API version 41.0 and later. To access this field, your org must use Account Engagement and users need the CRM User or Sales User permission set.
TotalTrackedLinkClicks	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The number of times prospects clicked a link in the email. This field is available in API version 41.0 and later. To access this field, your org must use Account Engagement and users need the CRM User or Sales User permission set.

Field	Details
Type	Type picklist Properties Filter, Group, Nillable, Restricted picklist Description The type of email sent: list email or automated email. Reserved for future use. This field is available in API version 46.0 and later. To access this field, your org must use Account Engagement and users need the CRM User or Sales User permission set.
UniqueClickThroughRate	Type percent Properties Filter, Nillable, Sort Description The percentage of visitors who clicked a link contained in an email. This field is available in API version 41.0 and later. To access this field, your org must use Account Engagement and users need the CRM User or Sales User permission set.
UniqueOpens	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The number of prospects who loaded the images in the HTML version of the email. The Unique Opens category counts each recipient one time only, even if the prospect loaded images several times. This field is available in API version 41.0 and later. To access this field, your org must use Account Engagement and users need the CRM User or Sales User permission set.
UniqueOptOuts	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description Unique opt-outs represent the total number of prospects that have clicked the link to unsubscribe or opted out of all emails in the Email Preference Center. These prospects are removed from future email sends. This field is available in API version 41.0 and later. To access this field, your org must use Account Engagement and users need the CRM User or Sales User permission set.

Field	Details
UniqueReplies	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The total number of unique replies. This field is available in API version 41.0 and later. To access this field, your org must use Account Engagement and users need the Salesforce Engage permission set.
UniqueTrackedLinkClicks	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The number of times a prospect clicked a link in the email. This metric doesn't include multiple clicks of the same link. This field is available in API version 41.0 and later. To access this field, your org must use Account Engagement and users need the CRM User or Sales User permission set.

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AccountChangeEvent](#) (API version 44.0)

Change events are available for the object.

[ListEmailOwnerSharingRule](#)

Sharing rules are available for the object.

[ListEmailShare](#)

Sharing is available for the object.

ListEmailIndividualRecipient

For a list email in Salesforce, represents a recipient. Each record represents a link from a list email to exactly one recipient for that list email. Recipients can be contacts, leads, or campaign members. Has a one-to-many relationship with ListEmail. This object is available in API version 44.0 and later.

The visibility and accessibility of this object is inherited from the related list email.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ActionCadenceStepTrackerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Understand which action cadence step tracker the list email individual recipient is related to. Used for automated emails in Sales Engagement. Users must have the Sales Engagement Cadence Creator or Sales Engagement User permission enabled. This field is available in API version 54.0 and later. Relationship Name ActionCadenceStepTracker Relationship Type Lookup Refers To ActionCadenceStepTracker
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Possible values are: • EUR (Euro) • INR (Indian Rupee) • USD (US Dollars)
ListEmailId	Type reference Properties Create, Filter, Group, Sort Description The related list email record. Required on record creation; read-only otherwise.

Field	Details
	This is a relationship field. Relationship Name ListEmail Relationship Type Lookup Refers To ListEmail
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The auto-generated name of the list email recipient source.
RecipientId	Type reference Properties Create, Filter, Group, Sort, Update Description the contact, lead, person account, or campaign member ID of the individual list email recipient. This is a relationship field. Relationship Name Recipient Relationship Type Lookup Refers To CampaignMember, Contact, Lead

Usage

ListEmailSentResult

Represents the results of a list email sent from Salesforce, or sent from Account Engagement and synced to Salesforce. It contains transport headers and information specific to the associated send action. This object is available in API version 67.0 and later.

 **Example:**

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ActionCadenceStepTrackerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the action cadence step tracker related to the individual recipient of the list email. Used for automated emails in Sales Engagement. Users must have the Sales Engagement Cadence Creator or Sales Engagement User permission enabled. Relationship Name ActionCadenceStepTracker Refers To ActionCadenceStepTracker
ActivityId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The task representation of the sent email. Relationship Name Activity Refers To Task
EmailAddress	Type textarea Properties Create, Nillable, Update Description The email address of the recipient.
FirstClickedDate	Type dateTime

Field	Details
	Properties Create, Filter, Nillable, Sort, Update Description The timestamp for when the email link was first clicked.
FirstOpenedDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The timestamp for when the email was first opened.
HasReply	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the email has a reply (<code>true</code>) or not (<code>false</code>) The default value is <code>false</code> .
Headers	Type textarea Properties Create, Nillable, Update Description The internet message headers of the email used for debugging and email threading purposes.
isClicked	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the individual copy of the list email is clicked <code>true</code> or <code>false</code> . The default value is <code>false</code> .
IsLinkTracked	Type boolean Properties Create, Defaulted on Create, Filter, Group, Sort, Update Description Indicates whether there are any URLs in the email that can be tracked (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .

Field	Details
IsOpenTracked	Type boolean Properties Create, Defaulted on Create, Filter, Group, Sort, Update Description Indicates whether the email is trackable (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
IsOpened	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the email has been opened (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
LastClickedDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The timestamp when the email was last clicked.
LastOpenedDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The timestamp when the email was last opened.
ListEmailId	Type reference Properties Create, Filter, Group, Sort Description The ID of the list email that's associated with the email. Relationship Name ListEmail Relationship Type Master-detail Refers To ListEmail (the master object)

Field	Details
MessageIdentifier	Type string Properties Create, Filter, idLookup, Nillable, Sort, Update Description The internet ID of an email.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the list email sent result.
Reason	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates the reason why a list email failed to send. Possible values are: • Bounced • NoEmail - No Email Address • OptedOut - Opted Out • OutOfOffice - Out of Office • Restricted • SoftBounced - Soft Bounced
RecipientId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the individual list email recipient. This field is a polymorphic relationship field. Relationship Name Recipient Refers To Contact, Lead
Result	Type picklist

Field	Details
	Properties Create, Filter, Group, Restricted Picklist, Sort, Update
	Description Indicates the result of the sent list email. Possible values are: - Failed - NotSent - Sent
ThreadIdIdentifier	Type string
	Properties Create, Filter, idLookup, Nillable, Sort, Update
	Description The thread ID of the email.

ListEmailMonthlyMetric

Represents the monthly engagement metrics for a single list email. This object is available in API version 49.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Sales Engagement must be enabled.

Fields

Field	Details
AllEmailsBouncedCount	Type int
	Properties Filter, Group, Nillable, Sort
	Description The total hard and soft bounces that were triggered for this list email in the month. This field is a calculated field.

Field	Details
AllEmailsDeliveredCount	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who successfully received this list email in the month. This field is a calculated field.
AllEmailsHardBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The total hard bounces that were triggered for this list email in the month.
AllEmailsLinkClickedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of link clicks by the recipients of this list email in the month.
AllEmailsOpenedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who opened this list email in the month.
AllEmailsOutOfOfficeCount	Type int Properties Filter, Group, Nillable, Sort Description The number of out-of-office replies that were triggered for this list email in the month.
AllEmailsRepliedCount	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of replies to this list email in the month.
AllEmailsSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients to whom this list email was sent in the month.
AllEmailsSoftBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The total soft bounces that were triggered for this list email in the month.
HardBounceTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who were sent this list email with hard bounce tracking in the month. Available in API version 53.0 and later.
LinkClickTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who were sent this list email with link click tracking in the month. Available in API version 53.0 and later.
ListEmailId	Type reference Properties Filter, Group, Sort Description The ID of the related list email. This field is a relationship field.

Field	Details
	Relationship Name ListEmail Relationship Type Lookup Refers To ListEmail
Month	Type date Properties Filter, Group, Sort Description The month in which the engagement occurred.
MonthInt	Type int Properties Filter, Group, idLookup, Sort Description The month in which the engagement occurred, in yyyy-mm format.
OpenTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who were sent this list email with open tracking in the month. Available in API version 53.0 and later.
OutOfOfficeTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who were sent this list email with out-of-office tracking in the month. Available in API version 53.0 and later.
ReplyTrackableSends	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of recipients who were sent this list email with reply tracking in the month. Available in API version 53.0 and later.
SoftBounceTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who were sent this list email with soft bounce tracking in the month. Available in API version 53.0 and later.
TrackableSendHardBounceRate	Type percent Properties Filter, Nillable, Sort Description The percentage of recipients for whom this list email, sent with hard bounce tracking, resulted in a hard bounce in the month. Available in API version 54.0 and later. This field is a calculated field.
TrackableSendLinkClickRate	Type percent Properties Filter, Nillable, Sort Description The percentage of recipients who clicked on a link in this list email that was sent with link click tracking in the month. Available in API version 53.0 and later. This field is a calculated field.
TrackableSendOpenRate	Type percent Properties Filter, Nillable, Sort Description The percentage of recipients who opened this list email that was sent with open tracking in the month. Available in API version 53.0 and later. This field is a calculated field.
TrackableSendOutOfOfficeRate	Type percent

Field	Details
	Properties Filter, Nillable, Sort Description The percentage of recipients for whom the list email, sent with out-of-office tracking, resulted in an out-of-office reply in the month. Available in API version 54.0 and later. This field is a calculated field.
TrackableSendReplyRate	Type percent Properties Filter, Nillable, Sort Description The percentage of recipients for whom this list email, sent with reply tracking, resulted in a reply in the month. Available in API version 53.0 and later. This field is a calculated field.
TrackableSendSoftBounceRate	Type percent Properties Filter, Nillable, Sort Description The percentage of recipients for whom this list email, sent with soft bounce tracking, resulted in a soft bounce in the month. Available in API version 54.0 and later. This field is a calculated field.
UniqueEmailsLinkClickedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of unique recipients who clicked a link in this list email in the month.
UniqueEmailsOpenedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of unique recipients who opened this list email in the month.
UniqueEmailsRepliedCount	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort
	Description The number of unique recipients who replied to this list email in the month.

ListEmailRecipientSource

For a list email in Salesforce, represents the dynamically defined sources of recipient email addresses. Each record represents a link to a single list view or campaign that is examined when the list email is sent. Has a one-to-many relationship with ListEmail. This object is available in API version 41.0 and later.

The visibility and accessibility of this object is inherited from the related list email.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `getDeleted()`, `getUpdated()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ListEmailId	Type reference Properties Create, Filter, Group, Sort Description The related list email record. Required on record creation; read-only otherwise. This is a relationship field. Relationship Name ListEmail Relationship Type Lookup Refers To ListEmail
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort

Field	Details
	Description The auto-generated name of the list email recipient source.
SourceListId	Type reference Properties Create, Filter, Group, Sort, Update Description Required. The id of a list view to send the list email to. Read-only except when list email is in draft state. This is a polymorphic relationship field. Relationship Name SourceList Relationship Type Lookup Refers To Campaign, ListView, Topic
SourceType	Type reference Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. Read-only except when list email is in draft state. Valid values: • Include

ListView

Represents a list view. A list view shows a set of records for an object, based on specific criteria. This object is available in API version 32.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`, `search()`

Fields

Name	Details
DeveloperName	Type string Properties Filter, Group, Sort Description The fully qualified developer name of the list view.
IsSqlCompatible	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Whether the list view can be used with SOQL..
LastModifiedById	Type User Properties Filter, Sort Description The ID of the user who last modified the list view.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the list view was last referenced, with a precision of one second.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the list view was last viewed, with a precision of one second.
Name	Type string Properties Filter, Group, idLookup, Sort

Name	Details
NamespacePrefix	Description The name of the list view.
	Type string
	Properties Filter, Group, Nillable, Sort
	Description The namespace of the list view.
	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
SObjectType	Description The API name of the sObject for the list view.

Usage

Use this object to retrieve the metadata for a pipeline inspection view.

ListViewChart

Represents a graphical chart that's displayed on Salesforce for Android, iOS, and mobile web list views. The chart aggregates data that is filtered based on the list view that's currently displayed. This object is available in API version 33.0 and later and is accessible by portal users.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Name	Description
AggregateField	Type picklist
	Properties Create, Filter, Group, Nillable, Query, Restricted picklist, Retrieve, Sort, Update

Name	Description
	Description The field that's used for calculating data on each group. <code>AggregateField</code> can't be the same as <code>GroupingField</code> .
AggregateType	Type picklist Properties Create, Filter, Group, Query, Restricted picklist, Retrieve, Sort, Update Description The type of calculations to run on each group. The supported <code>AggregateType</code> values are Count, Sum, and Avg.
ChartType	Type picklist Properties Create, Filter, Group, Query, Restricted picklist, Retrieve, Sort, Update Description The type of chart to create. The supported chart types are horizontal bar chart, vertical bar chart, and donut chart.
DeveloperName	Type string Properties Create, Filter, Group, Query, Retrieve, Sort, Update Description The fully qualified developer name of the chart.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
GroupingField	Type picklist Properties Create, Filter, Group, Nillable, Query, Restricted picklist, Retrieve, Sort, Update Description The field that's used to divide the data into collections. The field must be supported by SOQL GROUP BY functionality. <code>GroupingField</code> can't be the same as <code>AggregateField</code> .
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Name	Description
	Description The language of the MasterLabel.
MasterLabel	Type string Properties Create, Filter, Group, Query, Retrieve, Sort, Update Description The label for the chart.
OwnerId	Type reference Properties Create, Filter, Group, Query, Retrieve, Sort, Update Description The ID of the user who owns the chart. This is a relationship field. Relationship Name Owner Relationship Type Lookup Refers To User
SubjectType	Type picklist Properties Create, Filter, Group, Query, Restricted picklist, Retrieve, Sort Description The API name of the sObject for the chart.

ListViewChartInstance

Retrieves metadata for all standard and custom charts for a given entity in context of a given list view. This object is available in API versions 34.0 and later.

Supported Calls

`describeSObjects(), query()`

Fields

Field Name	Details
AggregateField	Type string Properties Filter, Group, Sort Description The field that's used for calculating data on each group. AggregateField can't be the same as GroupingField.
AggregateType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of calculations to run on each group. The supported AggregateType values are Count, Sum, and Avg.
ChartType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of chart to create. The supported chart types are horizontal bar chart, vertical bar chart, and donut chart.
DataQuery	Type textarea Properties Filter, Nillable, Sort Description The SOQL query that can be executed to fetch the data for drawing a chart.
DataQueryWithoutUserFilters	Type textarea Properties Filter, Nillable, Sort Description The SOQL query that can be executed to fetch the data for drawing a chart, without user filters. Available in API v43.0 and later.

Field Name	Details
DeveloperName	Type string Properties Filter, Group, Sort Description API name of the chart. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.  Note: When creating large sets of data, always specify a unique DeveloperName for each record. If no DeveloperName is specified, performance slows down while Salesforce generates one for each record.
ExternalId	Type string Properties Filter, Group, Nillable, Sort Description Reserved for future use.
GroupingField	Type string Properties Filter, Group, Sort Description The field that's used to divide the data into collections. The field has to be supported by SOQL GROUP BY functionality. GroupingField can't be the same as AggregateField.
IsDeletable	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates if the chart can be deleted.
IsEditable	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field Name	Details
	Description Indicates if the chart can be edited. Standard charts are not editable.
IsLastViewed	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates if a chart is the last viewed by a user.
Label	Type string Properties Filter, Group, Sort Description The display name of the chart.
ListViewChartId	Type reference Properties Filter, Group, Sort Description ID of the chart created by a user. For standard charts, this is null. This is a relationship field. Relationship Name ListViewChart Relationship Type Lookup Refers To ListViewChart
ListViewContextId	Type reference Properties Filter, Group, Sort Description ID of the list view in context of which the chart is generated. Required to query <code>ListViewChartInstance</code> . This is a relationship field. Relationship Name ListViewContext

Field Name	Details
	Relationship Type Lookup
	Refers To ListView
SourceEntity	Type string
	Properties Filter, Group, Sort
	Description API name of the entity to which the chart is related. Required to query ListViewChartInstance.

Usage

Example 1. Retrieve all custom and standard charts for Account entity for All Accounts list view

```
SELECT AggregateField, AggregateType, ChartType, DataQuery, DeveloperName, ExternalId,
GroupingField, Id, IsDeletable, IsEditable, IsLastViewed, Label, ListViewChartId,
ListViewContextId, SourceEntity FROM ListViewChartInstance WHERE SourceEntity='Account'
and ListViewContextId='00BR0000000U8Hr'
```

Example 2. Retrieve metadata for a specific custom chart by ID for Account entity and All Accounts list view

```
SELECT AggregateField, AggregateType, ChartType, DataQuery, DeveloperName, ExternalId,
GroupingField, Id, IsDeletable, IsEditable, IsLastViewed, Label, ListViewChartId,
ListViewContextId, SourceEntity FROM ListViewChartInstance WHERE SourceEntity='Account'
and ListViewContextId='00BR0000000U8Hr' and ListViewChartId='0DdR00000004CBxKAM'
```

Example 3. Retrieve metadata for a specific standard chart by its developer name for Account entity and All Accounts list view

```
SELECT AggregateField, AggregateType, ChartType, DataQuery, DeveloperName, ExternalId,
GroupingField, Id, IsDeletable, IsEditable, IsLastViewed, Label, ListViewChartId,
ListViewContextId, SourceEntity FROM ListViewChartInstance WHERE SourceEntity='Account'
and ListViewContextId='00BR0000000U8Hr' and DeveloperName='AccountsByIndustry'
```

LiveAgentSession

This object is automatically created for each Chat session and stores information about the session. This object is available in API versions 28.0 and later.



Note: Standard fields for the LiveAgentSession object can only be modified if your administrator has given you editing permissions for these records.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`

Fields

Field Name	Details
AgentId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the agent associated with the session.
ChatReqAssigned	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of chat requests that were assigned to an agent during a session.
ChatReqDeclined	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of chat requests that were declined by an agent during a session.
ChatReqEngaged	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of chats in which an agent was engaged during a session.
ChatReqTimedOut	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of chat requests that timed out in an agent's queue during a session.

Field Name	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the session record was last referenced.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the session record was last viewed.
LoginTime	Type dateTime Properties Create, Filter, Sort, Update Description The date and time an agent logged in during the session.
LogoutTime	Type dateTime Properties Create, Filter, Sort, Update Description The date and time an agent logged out during a session.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookupSort Description The name of the session.
NumFlagLoweredAgent	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of assistance flags lowered by the agent.

Field Name	Details
NumFlagLoweredSupervisor	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of assistance flags lowered by the supervisor.
NumFlagRaised	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of assistance flags raised by the agent.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of the session record.
TimeAtCapacity	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The amount of time an agent spent with the maximum number of chats in his or her queue.
TimeIdle	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The amount of time an agent spent idle during the session.
TimeInAwayStatus	Type int Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The amount of time an agent spent with a status of “Away” during a session.
TimeInChats	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The amount of time an agent spent engaged in chats during a session.
TimeInOnlineStatus	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The amount of time an agent spent with a status of “Online” during a session.

Usage

Use this object to query and manage chat session records.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[LiveAgentSessionHistory](#)

History is available for tracked fields of the object.

[LiveAgentSessionOwnerSharingRule](#)

Sharing rules are available for the object.

[LiveAgentSessionShare](#)

Sharing is available for the object.

LiveAgentSessionHistory

This object is automatically created for each Chat session and stores information about changes made to the session. This object is available in API versions 28.0 and later.



Note: Standard fields for the LiveAgentSession object can only be modified if your administrator has given you editing permissions for these records.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Fields

Field Name	Details
<code>DataType</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Data type of the field that was changed.
<code>Field</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The name of the field that was changed in a session record.
<code>LiveAgentSessionId</code>	Type reference Properties Filter, Group, Sort Description ID of the session record that was changed.
<code>NewValue</code>	Type anyType Properties Nillable, Sort Description The new value of the field that was changed.
<code>OldValue</code>	Type anyType Properties Nillable, Sort Description The original value of the field that was changed.

Usage

Use this object to identify changes to chat session records.

LiveAgentSessionShare

This object is automatically created for each Chat session and stores information about the session. This object is available in API versions 28.0 and later.

You can only create, edit, and delete sharing entries for standard objects whose `RowCause` field is set to `Manual`. Sharing entries for standard objects with different `RowCause` values are created as a result of your Salesforce org’s sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren’t stored at all.

-  **Note:** While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it’s possible that we’ll stop storing certain share records to improve performance. As a best practice, don’t create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.
-  **Note:** Standard fields for the LiveAgentSession object can only be modified if your administrator has given you editing permissions for these records.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

The properties available for some fields depend on the default organization-wide sharing settings. The properties listed are true for the default settings of such fields.

Field Name	Details
AccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Level of access that the User or Group has to the LiveAgentSession. The possible values are: - Read - Edit - All (This value is not valid for <code>create()</code> or <code>update()</code> calls.) This value must be set to an access level that is higher than the organization’s default access level for chat transcripts.
ParentId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Sort Description ID of the parent object, if any.
RowCause	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is <code>Manual</code> . If no value is specified, the field defaults to <code>Manual</code> . All other <code>RowCause</code> values are read-only. After the sharing entry is created, this field can't be edited. Values can include: • <code>Manual</code>—The User or Group has access because a user with "All" access manually shared the <code>LiveAgentSession</code> with them. • <code>Owner</code>—The User is the owner of the <code>LiveAgentSession</code> or is in a role above the <code>LiveAgentSession</code> owner in the role hierarchy.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the user or group that has been given access to the <code>LiveAgentSession</code> .

Usage

This object lets you determine which users and groups can view and edit `LiveAgentSession` records owned by other users.

If you attempt to create a new record that matches an existing record, the `create()` call updates any modified fields and returns the existing record.

LiveChatBlockingRule

Represents a rule for blocking chat visitors' IP addresses from starting new chats with agents. This object is available in API version 34.0 and later.

Supported Calls

`create()`, `delete()`, `query()`, `update()`, `retrieve()`

Special Access Rules

To create a new rule, you must be logged in with the “Customize Application” permission or as a system administrator.

Fields

Field Name	Details
Description	Type string Properties Create, Nillable Description The description of the blocking rule—for example, the reason why the given IP address or range of addresses is being banned from starting new chats.
DeveloperName	Type string Properties Create, Filter, Group, Sort Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object’s name in a managed package and the changes are reflected in a subscriber’s organization.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
FromIpAddress	Type string Properties Create, Filter, Group, Sort Description The IP address of the user that you want to block, or the beginning of the range of IP addresses you want to block. If you want to block a range of IP addresses, indicate the end of the range in the <code>ToIpAddress</code> field. If you don’t indicate

Field Name	Details
	an IP address in the <code>ToIpAddress</code> field, the only IP address that will be blocked is the IP address in the <code>FromIpAddress</code> field.
Language	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The language of the blocking rule.
MasterLabel	Type string Properties Create, Filter, Group, Sort Description Label for the blocking rule.
ToIpAddress	Type string Properties Create, Filter, Group, Nillable, Sort Description (Optional) The end of the range of IP addresses that you want to block. The range begins with and includes the IP address in the <code>FromIpAddress</code> field, and it ends with and includes the IP address in the <code>ToIpAddress</code> field.

Usage

Use this object to query and manage rules for blocking customers from starting new chats with agents.

LiveChatObjectAccessConfig

Represents the action you can perform on a specified object by the Chat API. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, enable Chat. To see the list of objects you can find or create in the UI using this API, enable the "Turns on findOrCreate in chat API" permission. You can find this permission in the Chat Settings page of the Setup UI.

Fields

Field	Details
AccessType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The API action you can perform on the object specified in <code>SubjectType</code>. Possible values are: • Create • Find
ParentId	Type reference Properties Create, Filter, Group, Sort Description The ID of the associated LiveChatObjectAccessDefinition record. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To LiveChatObjectAccessDefinition
SubjectType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The object that the action specified by <code>AccessType</code> applies to. Possible values are all standard and custom objects. Custom objects are available as picklist values in API version 55.0 and later.

SEE ALSO:

[LiveChatObjectAccessDefinition](#)

LiveChatObjectAccessDefinition

Represents the parent record for one or more LiveChatObjectAccessConfig objects. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, enable Chat. To see the list of objects you can find or create in the UI using this API, enable the "Turns on findOrCreate in chat API" permission. You can find this permission in the Chat Settings page of the Setup UI.

Fields

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. The name: • must be 40 characters or fewer • must begin with a letter • can contain only underscores and alphanumeric characters • can't include spaces • can't end with an underscore • can't contain 2 consecutive underscores In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The combined language and locale ISO code, which controls the language for labels displayed in an application. Possible values are: • da—Danish

Field	Details
	• de—German • en_US—English • es—Spanish • es_MX—Spanish (Mexico) • fi—Finnish • fr—French • it—Italian • ja—Japanese • ko—Korean • nl_NL—Dutch • no—Norwegian • pt_BR—Portuguese (Brazil) • ru—Russian • sv—Swedish • th—Thai • zh_CN—Chinese (Simplified) • zh_TW—Chinese (Traditional)
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The label for this object's record. This display value is the internal label that doesn't get translated.

LiveChatButton

Represents a button that allows visitors to request chats with Chat users. This object is available in API version 24.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
Animation	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of animation used when an automated chat invitation appears on-screen. For automated chat invitations only. Available in API version 29.0 and later. Possible values are: • Appear • Custom • Fade • Slide
AutoGreeting	Type textarea Properties Create, Filter, Nillable, Sort, Update Description The text that is automatically sent from an agent to a visitor when a chat session starts.  Note: A greeting message in the <code>AutoGreeting</code> field of the <code>LiveChatButton</code> object overrides individual users' greeting messages in the <code>AutoGreeting</code> field in the <code>LiveChatUserConfig</code> object.
ChasitorIdleTimeout	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The amount of time a customer has to respond to an agent message before the chat times out.
ChasitorIdleTimeoutWarning	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The amount of time a customer has to respond to an agent message before a warning appears and a timer begins a countdown. This value must be shorter

Field Name	Details
	than the <code>ChasitorIdleTimeout</code> value. We recommend at least 30 seconds shorter.
<code>ChatPageId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The record ID of the custom VisualForce page that contains the custom chat window code. This field is a relationship field. Relationship Name ChatPage Relationship Type Lookup Refers To ApexPage
<code>CustomAgentName</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The custom name of the agent associated with the button. Available in API version 29.0 and later.  Note: A custom agent name in the <code>CustomAgentName</code> field of the <code>LiveChatButton</code> object overrides individual users' custom agent name in the <code>CustomAgentName</code> field in the <code>LiveChatUserConfig</code> object.
<code>DeveloperName</code>	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.

Field Name	Details
	 Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance may slow while Salesforce generates one for each record.
HasQueue	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether or not to allow queuing incoming chat requests until an agent is available. The default value is <code>false</code>.
InviteEndPosition	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The position on screen where an automated chat invitation's animation ends.  Note: You don't need to select an end position for your automated chat invitation if you use a custom animation. For automated chat invitations only. Available in API version 29.0 and later. Possible values are: • Bottom • BottomLeft • BottomRight • Center • Left • Right • Top • TopLeft • TopRight
InviteImageId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The record ID of the static image resource displayed on your automated chat invitation. For automated chat invitations only. Available in API version 29.0 and later. This field is a relationship field. Relationship Name InvetlImage Relationship Type Lookup Refers To StaticResource
InviteStartPosition	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort , Update Description The position on screen where an automated chat invitation's animation begins.  Note: You don't need to select a start position for your automated chat invitation if you use a custom animation. For automated chat invitations only. Available in API version 29.0 and later. Possible values are: • Bottom • BottomLeft • BottomLeftBottom • BottomLeftLeft • BottomRight • BottomRightBottom • BottomRightRight • Left • Top • Right • TopLeft • TopLeftLeft • TopLeftTop • TopRight—Top Right • TopRightRight • TopRightTop

Field Name	Details
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description For automated chat invitations, specifies whether an automated chat invitation is active or not. The default value is <code>false</code>.
IsRoutingFlowEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Specifies whether routing flow is enabled or not. The default value is <code>false</code>.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the chat. Possible values are: • <code>da</code>—Danish • <code>de</code>—German • <code>en_US</code>—English • <code>es</code>—Spanish • <code>es_MX</code>—Spanish (Mexico) • <code>fi</code>—Finnish • <code>fr</code>—French • <code>it</code>—Italian • <code>ja</code>—Japanese • <code>ko</code>—Korean • <code>nl_NL</code>—Dutch • <code>no</code>—Norwegian • <code>pt_BR</code>—Portuguese (Brazil) • <code>ru</code>—Russian • <code>sv</code>—Swedish

Field Name	Details
	• <code>th</code>—Thai • <code>zh_CN</code>—Chinese (Simplified) • <code>zh_TW</code>—Chinese (Traditional)
<code>MasterLabel</code>	Type string Properties Create, Filter, Group, Sort, Update Description Label for the chat button.
<code>NumberOfReroutingAttempts</code>	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Specifies the number of times a chat request can be rerouted to available agents if all agents reject the chat request.
<code>OfflineImageId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The record ID of the static image resource that is displayed when the button is offline (inactive). This field is a relationship field. Relationship Name OfflineImage Relationship Type Lookup Refers To StaticResource
<code>OnlineImageId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The record ID of the static image resource that is displayed when the button is online (active).

Field Name	Details
	This field is a relationship field. Relationship Name OnlineImage Relationship Type Lookup Refers To StaticResource
OptionsHasChasitorIdleTimeout	Type boolean Properties Create, Filter, Update Description Specifies whether Customer Time-Out is enabled.
OptionsHasInviteAfterAccept	Type boolean Properties Create, Filter, Update Description Specifies whether an automated chat invitation can be sent to a customer after that customer has accepted a prior automated chat invitation (<code>true</code>) or not (<code>false</code>). For automated chat invitations only. Available in API version 29.0 and later.
OptionsHasInviteAfterReject	Type boolean Properties Create, Filter, Update Description Specifies whether an automated chat invitation can be sent to a customer after that customer has rejected a prior automated chat invitation (<code>true</code>) or not (<code>false</code>). For automated chat invitations only. Available in API version 29.0 and later.
OptionsHasRerouteDeclinedRequest	Type boolean Properties Create, Filter, Update Description Specifies whether a chat request that has been rejected by all available agents should be rerouted to available agents again (<code>true</code>) or not (<code>false</code>).

Field Name	Details
OptionsIsAutoAccept	Type boolean Properties Create, Filter, Update Description Specifies whether a chat request should be automatically accepted by the agent it's assigned to (<code>true</code>) or not (<code>false</code>). For chat buttons and automated chat invitations with <code>RoutingType</code> set to <code>Most Available</code> or <code>Least Active</code>. Available in API version 30.0 and later.
OptionsIsInviteAutoRemove	Type boolean Properties Create, Filter, Update Description Specifies whether an automated chat invitation should be automatically removed from the screen after a certain amount of time (<code>true</code>) or not (<code>false</code>). For automated chat invitations only. Available in API version 29.0 and later.
OverallQueueLength	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The maximum number of chat requests allowed to queue.
PerAgentQueueLength	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The maximum number of chat requests allowed to queue for each agent with the required skill.
PostchatPageId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The record ID of the custom VisualForce page displayed when the chat ends. This field is a relationship field.

Field Name	Details
	Relationship Name PostchatPage Relationship Type Lookup Refers To ApexPage
PostchatUrl	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The URL the user is directed to after the chat ends.
PrechatFormPageId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The record ID of the custom VisualForce page displayed before the chat begins. This field is a relationship field. Relationship Name PrechatFormPage Relationship Type Lookup Refers To ApexPage
PrechatFormUrl	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The URL the user is directed to before the chat begins.
PushTimeout	Type int Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The number of seconds an agent has to answer a chat request before it's routed to the next available agent.
QueueId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The record ID of the queue used for this chat button. This field is a relationship field. Relationship Name Queue Relationship Type Lookup Refers To Group
RoutingConfigurationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The record ID of the routing configuration used for this chat button. This field is a relationship field. Relationship Name RoutingConfiguration Relationship Type Lookup Refers To QueueRoutingConfig
RoutingType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description How chat requests are routed to agents. The values are: • Choice—Incoming chat requests are added to the queue in Live Agent in the Salesforce console and are available to any agent with the required skill.

Field Name	Details
	Least Active—Incoming chats are routed to the agent with the required skill who has the fewest active chats. Most Available—Incoming chats are routed to the agent with the required skill and the greatest difference between chat capacity and active chat sessions. For example, if Agent A and Agent B each have a chat capacity of five, and Agent A has three active chat sessions while Agent B has one, incoming chats will be routed to Agent B. Omni—Incoming chats are routed using Omni-Channel queues.
SiteId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The record ID of the site used for loading static resources and custom VisualForce pages. This field is a relationship field. Relationship Name Site Relationship Type Lookup Refers To Site
SkillId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The record ID of the skill used to route incoming chat requests. To associate multiple skills with a chat button, reference one skill in the <code>SkillId</code> field and use <code>LiveChatButtonSkill</code> junction objects for the remaining skills. This field is a relationship field. Relationship Name Skill Relationship Type Lookup Refers To Skill
TimeToRemoveInvite	Type int

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The number of seconds an automated invitation stays on-screen before it is automatically removed. For automated chat invitations only. Available in API version 29.0 and later.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of element to display to customers. Possible values are: • <code>Invite</code>—Automated invitation • <code>Standard</code>—Chat button
WindowLanguage	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language used for standard chat windows. Custom chat windows use the language of the user's browser. Possible values are: • <code>da</code>—Danish • <code>de</code>—German • <code>en_US</code>—English • <code>es</code>—Spanish • <code>es_MX</code>—Spanish (Mexico) • <code>fi</code>—Finnish • <code>fr</code>—French • <code>it</code>—Italian • <code>ja</code>—Japanese • <code>ko</code>—Korean • <code>nl_NL</code>—Dutch • <code>no</code>—Norwegian • <code>pt_BR</code>—Portuguese (Brazil) • <code>ru</code>—Russian • <code>sv</code>—Swedish

Field Name	Details
	• <code>th</code>—Thai • <code>zh_CN</code>—Chinese (Simplified) • <code>zh_TW</code>—Chinese (Traditional)

Usage

Use this object to query and manage chat buttons and automated chat invitations.

LiveChatButtonDeployment

Associates an automated chat invitation with a specific deployment. This object is available in API versions 28.0 and later.

Supported Calls

`create()`, `delete()`, `query()`, `update()`, `retrieve()`

Fields

Field Name	Details
<code>ButtonId</code>	Type reference Properties Create, Filter, Group, Sort Description The ID of the automated invitation associated with the deployment.
<code>DeploymentId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the deployment that will feature the automated invitation.

Usage

Use this object to associate automated chat invitations with specific deployments.

LiveChatButtonSkill

Represents all the skills available to a LiveChatButton except the one currently assigned. To retrieve the skill currently assigned, query LiveChatButton. This object is available in API version 25.0 and later.

Supported Calls

`create()`, `delete()`, `update()`, `query()`

Fields

Field Name	Details
ButtonID	Type reference Properties Create, Filter, Group, Sort Description The record ID of the button.
SkillID	Type reference Properties Create, Filter, Group, Nillable, Sort Description The record ID of the skill.

Usage

Use this object to assign a specific skill to a specific button for multi-skill routing. For example:

```
String myButtonId = "button_Id";
String myButtonDevName = "button_DeveloperName";
List<String> skillIds = new List<String>();

//Get one skill ID from button
for(LiveChatButton lcb : [SELECT SkillId FROM LiveChatButton WHERE DeveloperName =:
myButtonDevName]) {
    skillIds.add(lcb.SkillId);
}
//Get remaining skills from LiveChatButtonSkill join object
for(LiveChatButtonSkill lcbs : [SELECT SkillID FROM LiveChatButtonSkill WHERE ButtonId =:
myButtonId]) {
    skillIds.add(lcbs.SkillId);
}
```

```
//Retrieve all skills into a single list  
List<Skill> skills = [SELECT Id, DeveloperName FROM Skill WHERE Id IN :SkillIds];
```

LiveChatDeployment

Represents the general settings for deploying Live Agent on a website. This object is available in API version 24.0 and later.

Supported Calls

`create()`, `query()`, `update()`, `retrieve()`

Fields

Field Name	Details
BrandingId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The record ID of the static image resource that's displayed in the chat window.
ConnectionTimeoutDuration	Type int Properties Create, Filter, Group, Nillable, Sort Description Indicates the amount of time before the chat times out, in seconds.
ConnectionWarningDuration	Type int Properties Create, Filter, Group, Nillable, Sort Description Indicates the amount of time before a time-out warning is displayed to the agent, in seconds.
DeveloperName	Type string Properties Create, Filter, Group, Sort

Field Name	Details
	Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.  Note: Only users with View <code>DeveloperName</code> OR View Setup and Configuration permission can view, group, sort, and filter this field.
Domains	Type textarea Properties Create, Filter (unavailable in API version 25.0 and later), Nillable, Sort (unavailable in API version 25.0 and later) Description A comma-separated list of domains the deployment is allowlisted for. Leave this blank to allow the deployment to be used on any domain.
HasTranscriptSave	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Determines whether visitors can download and save transcripts from the chat window.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The language of the deployment.
MasterLabel	Type string

Field Name	Details
	Properties Create, Filter, Group, Sort Description The name of the deployment
MobileBrandingId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The record ID of the static image resource displayed in the mobile version of the chat window.
OptionsHasPrechatApi	Type boolean Properties Create, Filter Description Determines whether developers can access the Pre-Chat API.
SiteId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The record ID of the site used for loading static resources.
WindowTitle	Type string Properties Create, Filter, Group, Sort Description The text displayed in the title bar of the browser window used to launch the chat window.

Usage

Use this object to query and manage live chat deployments.

LiveChatSensitiveDataRule

Represents a rule for masking or deleting data of a specified pattern. Written as a regular expression (regex). This object is available in API version 35.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `update()`, `retrieve()`

Special Access Rules

As of Summer '20 and later, only authenticated internal and external users can access this object.

Fields

Field Name	Details
ActionType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The action to take on the text (remove or replace) when the sensitive data rule is triggered.
Description	Type textarea Properties Create, Nillable, Update Description The description of the sensitive data rule—for example, "Block social security numbers."
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the

Field Name	Details
	object's name in a managed package and the changes are reflected in a subscriber's organization.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
EnforceOn	Type int Properties Create, Filter, Group, Sort, Update Description Determines the roles on which the rule is enforced. The value is determined using bitwise OR operation. There are seven possible values: 1. Rule enforced on Agent 2. Rule enforced on Visitor 3. Rule enforced on Agent and Visitor 4. Rule enforced on Supervisor 5. Rule enforced on Agent and Supervisor 6. Rule enforced on Visitor and Supervisor 7. Rule enforced on Agent, Visitor, and Supervisor
IsEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Specifies whether a sensitive data rule is active (<code>true</code>) or not (<code>false</code>). Default value (if none is provided) is <code>false</code>.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the sensitive data rule.
MasterLabel	Type string

Field Name	Details
	Properties Create, Filter, Group, Sort, Update Description Label for the sensitive data rule.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
Pattern	Type textarea Properties Create, Update Description The pattern of text blocked by the rule. Written as a JavaScript regular expression (regex).
Priority	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the priority level of a Chat.
Replacement	Type string

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The string of characters that replaces the blocked text (if <code>ActionType Replace</code> is selected).

Usage

Use this object to mask or delete data of specified patterns, such as credit card, social security, phone and account numbers, or even profanity.

LiveChatTranscript

This object is automatically created for each Live Agent chat session and stores information about the session. This object is available in API version 24.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
Abandoned	Type int
	Properties Filter, Group, Nillable, Sort
	Description The amount of time in seconds an incoming chat request remained unanswered by an agent before the chat was disconnected by the customer.
AccountId	Type ID
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description ID of the account associated with the chat transcript.

Field Name	Details
AverageResponseTimeOperator	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The agent's average response time (in seconds) to chat messages from the visitor.
AverageResponseTimeVisitor	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The visitor's average response time (in seconds) to chat messages from the agent.
Body	Type textarea Properties Create, Nillable, Update Description The contents of the chat.
Browser	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The browser the visitor used for the chat.
BrowserLanguage	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The language of the visitor's browser.
CaseID	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the case associated with the chat transcript.

Field Name	Details
ChatDuration	Type int Properties Filter, Group, Nillable, Sort Description The total duration of the chat in seconds.
ChatKey	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort Description The session ID of the chat before it is persisted. <code>ChatKey</code> can be used with advanced integrations in the Salesforce console. This field is available in API version 25.0 and later.
ContactID	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the contact associated with the chat transcript.
EndedBy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The way the chat was ended: by the operator, the visitor, or the system.
EndTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The time the chat ended.
IpAddress	Type string Properties Create, Filter, Nillable, Sort, Update

Field Name	Details
	Description The auto-populated visitor's IP address. Do not edit. Create a custom field if you need an IP address field for your use case.
IsChatbotSession	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Whether the visitor is chatting with a chatbot (<code>true</code>) or not (<code>false</code>).
LastReferencedDate	Type date Properties Filter, Nillable, Sort, Update Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type date Properties Filter, Nillable, Sort, Update Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (<code>LastReferencedDate</code>) and not viewed.
LeadID	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the lead associated with the chat transcript.
LiveChatButtonID	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the LiveChatButton the chat session originated from.

Field Name	Details
LiveChatDeploymentID	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the LiveChatDeployment the chat session originated from.
LiveChatVisitorID	Type reference Properties Create, Filter, Group, Sort Description The ID of the visitor associated with the chat transcript.
Location	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The auto-populated best-guess approximation of the visitor's location. Do not edit.
MaxResponseTimeOperator	Type int Properties Filter, Group, Nillable, Sort Description The maximum time in seconds it took an agent to respond to a chat visitor's message.
MaxResponseTimeVisitor	Type int Properties Filter, Group, Nillable, Sort Description The maximum time in seconds it took a customer to respond to an agent's message.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort

Field Name	Details
	Description The name of the transcript.
OperatorMessageCount	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of messages sent by one or more agents during the chat.
OwnerID	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the operator who participated in the chat last; for missed chats, this is a system user.
Platform	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The visitor's operating system platform.
ReferrerUri	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The auto-populated URI where the chat request originated. Do not edit.
RequestTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The time the visitor requested the chat.
ScreenResolution	Type string

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The visitor's screen resolution.
SkillId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The auto-populated record ID of the primary Skill associated with the LiveChatButton the chat session originated from. Do not edit. To associate multiple skills with a LiveChatTranscript, use LiveChatTranscriptSkill junction objects.
StartTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The time the chat started.
Status	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The final status of the chat: completed, missed, or blocked.
SupervisorTranscriptBody	Type textarea Properties Create, Nillable, Update Description The text body of the supervisor's chat transcript.
UserAgent	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The visitor's user agent string.

Field Name	Details
VisitorMessageCount	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of messages sent by the visitor during the chat.
VisitorNetwork	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The network or service provider the chat visitor used for the chat.
WaitTime	Type int Properties Filter, Group, Nillable, Sort Description The total amount of time in seconds a chat request was waiting to be accepted by an agent.

Usage

Use this object to query and manage live chat transcripts.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

LiveChatTranscriptChangeEvent (API version 44.0)

Change events are available for the object.

LiveChatTranscriptFeed (API version 47.0)

Feed tracking is available for the object.

LiveChatTranscriptHistory

History is available for tracked fields of the object.

LiveChatTranscriptOwnerSharingRule (API version 29.0)

Sharing rules are available for the object.

LiveChatTranscriptShare

Sharing is available for the object.

LiveChatTranscriptEvent

Captures specific events that occur over the lifetime of a chat. This object is available in API version 24.0 and later.

Supported Calls

`create()`, `delete()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
AgentId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the agent associated with the event.
Detail	Type string Properties Create, Filter, Group, Nillable, Sort Description Details associated with the event.
LastReferencedDate	Type date Properties Filter, Nillable, Sort, Update Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type date Properties Filter, Nillable, Sort, Update Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.

Field Name	Details
LiveChatTranscriptId	Type reference Properties Create, Filter, Group, Sort Description The ID of the live chat transcript associated with the event.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the event.
Time	Type dateTime Properties Create, Filter, Sort Description The time at which the event happened.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The kind of event that occurred. - Accept—Accepted - AgentBlocked—Blocked by Agent - AlertCriticalWaitChat—Critical Wait Alert Time Reached - CancelBlocked—Cancel (Blocked) - CancelNoAgent—Cancel (No Agent) - CancelNoQueue—Cancel (No Queue) - CancelVisitor—Canceled by Visitor - ChasitorIdleTimeout—Visitor Idle Time-Out - ChasitorIdleTimeoutWarningCleared—Visitor Idle Time-Out Warning Cleared - ChasitorIdleTimeoutWarningTriggered—Visitor Idle Time-Out Warning Appeared - ChatRequest—Chat Requested

Field Name	Details
	• <code>ChatResumedAfterTransfer</code>—Chat resumed • <code>ChatbotEndChat</code>—Chatbot end chat • <code>ChatbotEndedChatByAction</code>—Conversation ended by automated action • <code>ChatbotEstablished</code>—Accepted by Chatbot • <code>ChatbotNotEstablished</code>—Chatbot Request Failed • <code>ChoiceRoute</code>—Routed (Choice) • <code>ClearCriticalWaitChat</code>—Critical Wait Alert Cleared • <code>ConferenceRequest</code>—Chat Conference Requested • <code>ConferenceRequestCanceled</code>—Chat Conference Canceled • <code>ConferenceRequestDeclined</code>—Chat Conference Declined • <code>ConnectionTimeout</code>—Visitor connection timed out. Available in API version 38.0 and later. • <code>ConnectionWarning</code>—Warning that visitor hasn't been connected for some time and that the connection times out soon. Available in API version 38.0 and later. • <code>DeclineManual</code>—Decline (Manual) • <code>DeclineTimeout</code>—Decline (Timeout) • <code>EndAgent</code>—Ended by Agent • <code>EndVisitor</code>—Ended by Visitor • <code>Enqueue</code>—Queued • <code>FileCanceledAgent</code>—File Transfer Canceled by Agent • <code>FileCanceledChasitor</code>—File Transfer Canceled by Visitor • <code>FileTransferFailure</code>—File Transfer Failure • <code>FileTransferRequested</code>—File Transfer Requested by Agent • <code>FileTransferSuccess</code>—File Transfer Success • <code>FileTransferToChasitor</code>—File Transfer Initiated by Agent • <code>FlagLoweredAgent</code>—Flag Lowered by Agent • <code>FlagLoweredSupervisor</code>—Flag Lowered by Supervisor • <code>FlagRaised</code>—Flag Raised • <code>LeaveAgent</code>—Agent Left • <code>LeaveVisitor</code>—Visitor Left • <code>OperatorJoinedConference</code>—Agent Joined Conference • <code>OperatorLeftConference</code>—Agent Left Conference • <code>Other</code> • <code>PushAssignment</code>—Routed (Push) • <code>SensitiveDataAgent</code>—Sensitive data blocked (Agent) • <code>SensitiveDataSupervisor</code>—Sensitive data blocked (Supervisor) • <code>SensitiveDataVisitor</code>—Sensitive data blocked (Visitor)

Field Name	Details
	• <code>Transfer</code>—Transfer Accepted • <code>TransferCancelled</code>—Transfer Request Canceled • <code>TransferDeclined</code>—Transfer Request Declined • <code>TransferRequest</code>—Transfer Requested • <code>TransferToBotFailed</code>—Transfer to bot failed • <code>TransferToButtonFailed</code>—Transfer to button failed • <code>TransferToQueueFailed</code>—Transfer to queue failed • <code>TransferredToBot</code>—Transferred to bot • <code>TransferredToButton</code>—Transferred to button • <code>TransferredToQueue</code>—Transferred to queue • <code>TransferredToSbrSkill</code>—Transferred to skill • <code>TransferredToSbrSkillFailed</code>—Transfer to skill failed • <code>Unassigned</code>

Usage

Use this object to query and manage live chat transcript events.



Note: `LiveChatTranscriptEvent` records are inserted after the chat is closed and the `LiveTranscript` record updated). However, the trigger on the `LiveChatTranscriptEvent` sObject fires separately on each `LiveChatTranscriptEvent` record within the same transaction.

All the `LiveChatTranscriptEvent` records are inserted in a single transaction but one by one. For example, the trigger is executed for each individual record.

```
trigger LCTE on LiveChatTranscriptEvent (before insert) {
    // Trigger.New will have only 1 record at a time and trigger will execute for
    individual record
    for(LiveChatTranscriptEvent l : Trigger.New)
        system.debug(l.Type + '>>' + l.Detail);
}
```

To avoid hitting any governors and limits, design your functionality considering this behavior. You can execute the logic by filtering the records based on the `Type` field of `LiveChatTranscriptEvent`.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

LiveChatTranscriptChangeEvent (API version 62.0)

Change events are available for the object.

LiveChatTranscriptShare

Represents a sharing entry on a `LiveChatTranscript` object. This object is available in API version 24.0 and later.

You can only create, edit, and delete sharing entries for standard objects whose `RowCause` field is set to `Manual`. Sharing entries for standard objects with different `RowCause` values are created as a result of your Salesforce org's sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren't stored at all.



Note: While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it's possible that we'll stop storing certain share records to improve performance. As a best practice, don't create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`create()`, `delete()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

The properties available for some fields depend on the default organization-wide sharing settings. The properties listed are true for the default settings of such fields.

Field Name	Details
<code>AccessLevel</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Level of access that the User or Group has to the LiveChatTranscript. The possible values are: - Read - Edit - All (This value is not valid for <code>create()</code> or <code>update()</code> calls.) This value must be set to an access level that is higher than the organization's default access level for live chat transcripts.
<code>ParentId</code>	Type reference Properties Create, Filter, Group, Sort Description ID of the parent object, if any
<code>RowCause</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort

Field Name	Details
	Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is <code>Manual</code> . If no value is specified, the field defaults to <code>Manual</code> . All other <code>RowCause</code> values are read-only. After the sharing entry is created, this field can't be edited. Values can include: <code>Manual</code>—The User or Group has access because a user with "All" access manually shared the LiveChatTranscript with them. <code>Owner</code>—The User is the owner of the LiveChatTranscript or is in a role above the LiveChatTranscript owner in the role hierarchy.
UserOrGroupID	Type reference Properties Create, Filter, Group, Sort Description ID of the User or Group that has been given access to the LiveChatTranscript.

Usage

This object lets you determine which users and groups can view and edit LiveChatTranscript records owned by other users.

If you attempt to create a new record that matches an existing record, the `create()` call updates any modified fields and returns the existing record.

LiveChatTranscriptSkill

Represents a join between LiveChatTranscript and Skill. This object is available in API version 25.0 and later.

Supported Calls

`create()`, `delete()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`

Fields

Field Name	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort

Field Name	Details
	Description The name of the transcript.
SkillId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The record ID of the skill.
TranscriptId	Type reference Properties Create, Filter, Group, Sort Description The record ID of the transcript.

Usage

Use this object to assign a specific skill to a specific transcript for multi-skill routing.

LiveChatUserConfig

Represents a setting that controls the console settings for Chat users. This object is available in API version 24.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`

Special Access Rules

As of Summer '20 and later, only authenticated internal and external users can access this object.

Fields

Field Name	Details
AutoGreeting	Type textarea Properties Create, Nillable

Field Name	Details
	Description The text that is automatically sent from an agent to a visitor when a chat session starts.
Capacity	Type int Properties Create, Filter, Group, Nillable, Sort Description Limits the amount of active chat sessions an agent can engage in.
CriticalWaitTime	Type int Properties Create, Filter, Group, Nillable, Sort Description The amount of time before a chat flashes to alert an agent to answer it.
CustomAgentName	Type string Properties Create, Filter, Group, Nillable, Sort Description The custom name of the agent associated with the Live Agent configuration.
DeveloperName	Type string Properties Create, Filter, Group, Nillable, Sort Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.

Field Name	Details
	 Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
HasLogoutSound	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Determines whether a sound plays when an agent logs out of the console.
HasNotifications	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Determines whether desktop notifications are enabled for the configuration. Available in API version 25.0 and later.
HasRequestSound	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Determines whether a sound plays when a chat request comes in.
HasSneakPeek	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Determines whether an agent sees a real-time preview of the messages typed by a visitor.
HasTransferConferenceGreeting	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether to enable sending an autogreeting when you transfer to another agent or invite an agent to a conference chat. The default value is <code>false</code>. Available in API version 53.0 and later.

Field Name	Details
IsAutoAwayOnDecline	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Determines whether agents' status is automatically changed to Away when they decline a chat request. Available in API version 26.0 and later.
Language	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The language of the configuration.
MasterLabel	Type string Properties Create, Filter, Group, Sort Description The name of the configuration.
OptionsHasAgentFileTransfer	Type boolean Properties Create, Filter Description Determines whether agents can initiate a file transfer from a chat customer. Available in API version 31.0 and later.
OptionsHasAgentSneakPeek	Type boolean Properties Create, Filter Description Determines whether Sneak Peek is enabled for agents. Available in API version 29.0 and later.
OptionsHasAssistanceFlag	Type boolean Properties Create, Filter

Field Name	Details
	Description Determines whether assistance flags are enabled for agents. Available in API version 29.0 and later.
OptionsHasChatConferencing	Type boolean Properties Create, Filter Description Determines whether agents can invite other agents into a customer chat. Available in API version 34.0 and later.
OptionsHasChatMonitoring	Type boolean Properties Create, Filter Description Determines whether supervisors can view agents' ongoing chats. Available in API version 29.0 and later.
OptionsHasChatTransferToAgent	Type boolean Properties Create, Filter Description Specifies whether an agent can transfer a chat directly to another agent. Available in API version 36.0 and later.
OptionsHasChatTransferToButton	Type boolean Properties Create, Filter Description Specifies whether an agent can transfer a chat to an agent assigned to a particular chat button. Available in API version 36.0 and later.
OptionsHasChatTransferToSkill	Type boolean Properties Create, Filter

Field Name	Details
	Description Specifies whether an agent can transfer a chat to agents assigned to a particular skill. Available in API version 36.0 and later.
OptionsHasTransferConferenceGreeting	Type boolean Properties Create, Filter, Update Description Specifies whether an agent can transfer a chat to an autogreeting or conference greeting. Available in API version 53.0 and later.
OptionsHasVisitorBlocking	Type boolean Properties Create, Filter Description Determines whether an agent can block IP addresses of troublesome visitors. Available in API version 34.0 and later.
OptionsHasWhisperMessage	Type boolean Properties Create, Filter Description Determines whether supervisors can send private messages to agents within an agent's chat with a customer. Available in API version 29.0 and later.
OptionsIsAutoAwayOnPushTimeout	Type boolean Properties Create, Filter Description Determines whether an agent's status automatically changes to Away if the agent doesn't respond to a chat request within the specified push time-out limit. Available in API version 34.0 and later.
SupervisorDefaultAgentStatus	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort

Field Name	Details
	Description The default agent status by which to filter agents in the Agent Status list in the supervisor panel.
SupervisorDefaultButtonId	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The default button ID by which to filter agents in the Agent Status list in the supervisor panel.
SupervisorDefaultSkillId	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The default skill ID by which to filter agents in the Agent Status list in the supervisor panel.

Usage

Use this object to query and manage agent configurations in Chat.

LiveChatUserConfigProfile

Represents a join between LiveChatUserConfig and Profile. This object is available in API version 24.0 and later.

Supported Calls

`create()`, `delete()`, `query()`, `retrieve()`

Special Access Rules

As of Summer '20 and later, only authenticated internal and external users can access this object.

Fields

Field Name	Details
LiveChatUserConfigId	Type reference Properties Create, Filter, Group, Sort Description The record ID of the agent configuration
ProfileId	Type reference Properties Create, Filter, Group, Sort Description The record ID of the profile

Usage

Use this object to assign specific agent configurations to specific user profiles.

LiveChatUserConfigUser

Represents a join between Live Chat User Config and User. This object is available in API version 24.0 and later.

Supported Calls

`create()`, `delete()`, `query()`, `retrieve()`

Special Access Rules

As of Summer '20 and later, only authenticated internal and external users can access this object.

Fields

Field Name	Details
LiveChatUserConfigId	Type reference Properties Create, Filter, Group, Sort

Field Name	Details
	Description The record ID of the agent configuration
UserId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The record ID of the user

Usage

Use this object to assign specific agent configurations to specific users.

LiveChatVisitor

Represents a website visitor who has started or tried to start a chat session. This object is available in API version 24.0 and later.

Supported Calls

`create()`, `delete()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
LastReferencedDate	Type date Properties Filter, Nillable, Sort, Update Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type date Properties Filter, Nillable, Sort, Update

Field Name	Details
	Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
Name	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description The name of the visitor
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The session key used to uniquely identify the visitor.

Usage

Use this object to query and manage live chat visitors.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

LiveChatVisitorChangeEvent (API version 62.0)

Change events are available for the object.

Location

Represents a warehouse, service vehicle, work site, or other element of the region where your team performs field service work. In API version 49.0 and later, you can associate activities with specific locations. Activities, such as the tasks and events related to a location, appear in the activities timeline when you view the location detail page. Also in API version 49.0 and later, Work.com users can view Employees as a related list on Location records. In API version 51.0 and later, this object is available for Omnichannel Inventory and represents physical locations where inventory is available for fulfilling orders.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

At least one of these features must be enabled:

- Commerce Store
- Contact Tracing for Employees
- Employee Experience
- Field Service
- Fulfillment Orders
- Health Cloud
- Industries Insurance
- Industries Visit
- Locations
- Omnichannel Inventory
- Public Sector
- Retail Execution
- Work.com

Fields

Field Name	Details
AssignedFoCount	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of fulfillment orders assigned to the location. Confirming held fulfillment order capacity increments this value. To reset the location's capacity, set this value to 0. This field is available when Order Management is installed and configured. By default, it's hidden by field-level security. This field is available in API version 55.0 and later.
CloseDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Date the location closed or went out of service.
ConstructionEndDate	Type date

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Date construction ended at the location.
ConstructionStartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Date construction began at the location.
DefaultPickupTime	Type time Properties Create, Filter, Group, Nillable, Sort, Update Description Default pickup time at the location. This field is available when Order Management is installed and configured. By default, it's hidden by field-level security. This field is available in API version 61.0 and later.
DefaultProcessingTime	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Default processing time at the location. This field is available when Order Management is installed and configured. By default, it's hidden by field-level security. This field is available in API version 61.0 and later.
DefaultProcessingTimeUnit	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Default processing time unit at the location. Possible values are: - Hours - Days - Weeks

Field Name	Details
	This field is available when Order Management is installed and configured. By default, it's hidden by field-level security. This field is available in API version 61.0 and later.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of the location.
DrivingDirections	Type string Properties Create, Filter, Nillable, Sort, Update Description Directions to the location.
EarliestPickupTimeOffset	Type integer Properties Create, Filter, Nillable, Sort, Update Description The earliest pickup time for BOPIS. This value is measured in minutes after the start of business hours.
ExternalReference	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Identifier of a location.
FoCapacity	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The maximum number of fulfillment orders that can be assigned to the location per time period. If this value is null, then this location's capacity isn't limited. This field is available when Order Management is installed and configured. By default, it's hidden by field-level security.

Field Name	Details
	This field is available in API version 55.0 and later.
FulfillingBusinessHours	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Fulfilling business hours at the location. This field is available when Order Management is installed and configured. By default, it's hidden by field-level security. This field is available in API version 61.0 and later.
FoCapacity	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The maximum number of fulfillment orders that can be assigned to the location per time period. If this value is null, then this location's capacity isn't limited. This field is available when Order Management is installed and configured. By default, it's hidden by field-level security. This field is available in API version 55.0 and later.
IsEligibleForPickup	Type boolean Properties Create, Filter, Nillable, Sort, Update Description Indicates whether the location supports BOPIS
IsInventoryLocation	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the location stores parts.  Note: This field must be selected if you want to associate the location with product items.
IsMobile	Type boolean

Field Name	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description Indicates whether the location moves. For example, a truck or tool box.
LastReferencedDate	Type datetime
	Properties Filter, Nillable, Sort
	Description The date when the location was last modified. Its label in the user interface is Last Modified Date.
LastViewedDate	Type datetime
	Properties Filter, Nillable, Sort
	Description The date the location was last viewed.
LatestPickupTimeOffset	Type integer
	Properties Create, Filter, Nillable, Sort, Update
	Description The latest pickup time for BOPIS. This value is measured in minutes before the end of business hours.
Latitude	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The latitude of the location.
Location	Type location
	Properties Nillable
	Description The geographic location.

Field Name	Details
LocationLevel	Type int Properties Filter, Group, Nillable, Sort Description The location's position in a location hierarchy. If the location has no parent or child locations, its level is 1. Locations that belong to a hierarchy have a level of 1 for the root location, 2 for the child locations of the root location, 3 for their children, and so forth.
LocationType	Type picklist Properties Create, Filter, Group, Sort, Update Description Picklist of location types. It has no default values, so you must populate it before creating any location records.
LogoId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description A ContentAsset representing a logo for the location. This field is available in API version 50.0 and later. This is a relationship field. Relationship Name Logo Relationship Type Lookup Refers To ContentAsset
Longitude	Type double Properties Create, Filter, Nillable, Sort, Update Description The longitude of the location.

Field Name	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the location. For example, Service Van #4.
OpenDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Date the location opened or came into service.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The location's owner or driver. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ParentLocationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The location's parent location. For example, if vans are stored at a warehouse when not in service, the warehouse is the parent location. This is a relationship field. Relationship Name ParentLocation Relationship Type Lookup

Field Name	Details
	Refers To Location
PickupProcessingTime	Type integer Properties Create, Filter, Nillable, Sort, Update Description The processing time required for BOPIS orders at this location.
PossessionDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date the location was purchased.
Priority	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The priority of the location when routing orders. No default values are included. Add values to the picklist and reference them in your custom routing logic. This field is available when Order Management is installed and configured. By default, it's hidden by field-level security. This field is available in API version 55.0 and later.
RemodelEndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Date when remodel construction ended at the location.
RemodelStartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Date when remodel construction started at the location.

Field Name	Details
RootLocationId	Type reference Properties Filter, Group, Nillable, Sort Description (Read Only) The top-level location in the location's hierarchy. This is a relationship field. Relationship Name RootLocation Relationship Type Lookup Refers To Location
ShouldSyncWithOci	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the location should sync its data with Omnichannel Inventory. The default value is <code>false</code>. This field is available in API version 51.0 and later.
ShouldTrackFoCapacity	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the location should track its fulfillment order capacity. The default value is <code>false</code>. This field is available when Order Management is installed and configured. By default, it's hidden by field-level security. This field is available in API version 55.0 and later.
TimeZone	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Picklist of available time zones.

Field Name	Details
VisitorAddressId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Lookup to an account's or client's address. This is a relationship field. Relationship Name VisitorAddress Relationship Type Lookup Refers To Address

Usage

Before creating any location records, add at least one value to the Location Type picklist. LocationType is a required field.

To track your inventory in Salesforce, create product items, which represent the stock of a particular product at a particular location. For example, create a product item that represents the 500 bolts you have in stock at your Warehouse A location. Each product item must be associated with a location.

To get a more granular picture of your field service operation, associate locations with service territories. For example, if a warehouse is located in a particular service territory, add it as a service territory location.

 **Important:** "Location" in Salesforce can also refer to the geolocation compound field found on many standard objects. When referencing the Location object in your Apex code, always use `Schema.Location` instead of `Location` to prevent confusion with the standard Location compound field. If referencing both the Location object and the Location field in the same snippet, you can differentiate between the two by using `System.Location` for the field and `Schema.Location` for the object.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

LocationChangeEvent (API version 48.0)

Change events are available for the object.

LocationFeed

Feed tracking is available for the object.

LocationHistory

History is available for tracked fields of the object.

LocationOwnerSharingRule

Sharing rules are available for the object.

LocationShare

Sharing is available for the object.

SEE ALSO:

- LocationGroup
- LocationGroupAssignment
- B2B Commerce and D2C Commerce Developer Guide: Inventory Data Model

LocationGroup

Represents a group of Omnichannel Inventory locations, providing an aggregate view of inventory availability across those locations. Omnichannel Inventory can create an inventory reservation for an order at the location group level, then assign the reservation to one or more locations in the group as needed. This object is available in API version 51.0 and later.

You can define location groups according to the logic of your business needs. For example, a location group can represent the warehouses in a geographic region, or it can include the fulfillment centers associated with a particular online storefront.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(), search(), undelete(), update(), upsert()

Special Access Rules

This object is only available in Omnichannel Inventory orgs.

Fields

Field	Details
Description	Type textarea Properties Create, Nillable, Update Description Description of the location group.
ExternalReference	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Used when OCI is integrated with B2C Commerce to associate the location group with an inventory list in B2C Commerce. This value must match the inventory list ID in B2C Commerce.

Field	Details
IsEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the location group is in use. If set to <i>false</i>, then inventory functions ignore this location group and its data isn't synchronized with OCI. The default value is <i>true</i>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. A null value can mean that this record has only been referenced (LastReferencedDate) and not viewed.
LocationGroupName	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the location group.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who currently owns this location group. Default value is the API user that created the record.
ShouldSyncWithOci	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Specifies whether to synchronize inventory data for this location group with Omnichannel Inventory. The default value is <code>true</code> .

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

LocationGroupChangeEvent (API version 62.0)

Change events are available for the object.

LocationGroupFeed

Feed tracking is available for the object.

LocationGroupHistory

History is available for tracked fields of the object.

LocationGroupOwnerSharingRule

Sharing rules are available for the object.

LocationGroupShare

Sharing is available for the object.

SEE ALSO:

[Location](#)

[LocationGroupAssignment](#)

[B2B Commerce and D2C Commerce Developer Guide: Inventory Data Model](#)

LocationGroupAssignment

Represents the assignment of a location to a location group. This object is available in API version 51.0 and later.

You can assign a location to multiple location groups, which associates it with one location group assignment for each location group that it's assigned to. Each location group assignment represents the relationship between one location and one location group, so a location or location group can be associated with multiple location group assignments.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is only available in Omnichannel Inventory orgs.

Fields

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. A null value can mean that this record has only been referenced (LastReferencedDate) and not viewed.
LocationExternalReference	Type string Properties Filter, Group, Nillable, Sort Description The external reference of the associated location.
LocationGroupAssignment	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the location group assignment.
LocationGroupExternalReference	Type string Properties Filter, Group, Nillable, Sort Description The external reference of the associated location group.
LocationGroupId	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description (Master-Detail) The associated location group.
LocationGroupName	Type string Properties Filter, Group, Nillable, Sort Description The location group name of the associated location group.
LocationId	Type reference Properties Create, Filter, Group, Sort Description (Master-Detail) The associated location.
LocationName	Type string Properties Filter, Group, Nillable, Sort Description The name of the associated location.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

LocationGroupAssignmentChangeEvent (API version 62.0)

Change events are available for the object.

SEE ALSO:

- Location
- LocationGroup

LocationShippingCarrierMethod

The available shipping carrier services associated with a location or location group. Allows the assignment of different shipping methods to a specific location and enables flexibility and customization in the shipping process. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The LocationShippingCarrierMethod object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the record was last modified. Its label in the user interface is <code>Last Modified Date</code>.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the record was last viewed.
LocationSourceId	Type reference Properties Create, Filter, Group, Sort, Update Description The location source ID. This is a polymorphic relationship field. Relationship Name LocationSource Refers To Location, LocationGroup
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort

Field	Details
	Description Name of the shipping carrier service associated with the location or location group.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the user who currently owns this LocationShippingCarrierMethod object. Default value is the user logged in to the API to perform the create. This is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
PickupTime	Type time Properties Create, Filter, Nillable, Sort, Update Description The time when the shipping carrier picks up the order from the associated location or location group. This field is available in API version 66.0 and later.
ShippingCarrierMethodId	Type reference Properties Create, Filter, Group, Sort, Update Description Shipping carrier method ID. This is a relationship field. Relationship Name ShippingCarrierMethod Refers To Location, ShippingCarrierMethod

LocationTrustMeasure

Represents the COVID safety protocols that your business follows. For example, enforcement of masks, social distancing, cleanliness, and capacity limits. This object is available in API version 50.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Description	Type string Properties Create, Filter, Group, Sort, Update Description A brief description of the safety protocol. For example, "Employees and customers are required to wear a mask in the store."
ImageUrl	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A public image URL to display for the LocationTrustMeasure object.
IsVisibleInPublic	Type boolean Properties Create, defaulted on create, Filter, Group, Sort, Update Description If true, displays the LocationTrustMeasure object on your site. If false, hides the LocationTrustMeasure object on your site.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The date on which the record was last viewed.
LocationExternalReference	Type string Properties Filter, Group, Nillable, Sort Description An ID assigned to the LocationTrustMeasure objects for a particular location.
LocationId	Type reference Properties Create, Filter, Group, Sort, Update Description The unique ID for the location associated with the LocationTrustMeasure.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-assigned name for the LocationTrustMeasure.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner for this record.
SortOrder	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The order in which to display LocationTrustMeasure objects on your site.
Title	Type string Properties Create, Filter, Group, Sort, Update

Field	Details
	Description The name of the safety protocol. For example, Enforcement of Masks.

LocWaitlistMsgTemplate

Represents a junction object connecting LocationWaitlist to MessagingTemplate. This object is available in API version 50.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date on which the record was last viewed.
LocationWaitlistId	Type reference Properties Create, Filter, Group, Sort, Update Description Reference to the LocationWaitlist record.
MessagingTemplateId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort, Update Description Reference to the MessagingTemplate record.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of this record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner for this record.
Type	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The status of the queue. Possible values are: - approaching—In Progress - confirmation—Confirmed - inactive—Inactive - ready—Ready - removed—Removed

LocationWaitlist

Represents a queue created for a specific location. Multiple queues can be created for a single location. For example, you can have a queue for each sales agent or a standard queue and a queue for vulnerable groups. The specific party of people in a queue is represented by LocationWaitlistedParty. This object is available in API version 50.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
BusinessHoursId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description A reference to the BusinessHours record that contains the hours the business is open.
ClosedDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The time a queue is closed.
CumulativeGuestCount	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The total number of guests allowed.
CumulativeGuestGroupCount	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The total number of groups allowed.
CurrentGuestCount	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The current number of guests.

Field	Details
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of this record.
GuestCapacity	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The total capacity of guests.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date on which the record was last viewed.
MaxPartySize	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The maximum size of a group.
MessagingChannelId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The messaging channel ID.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the group.
OpenDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The time a queue is open.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner for this record.
PartyReminderDelayMinutes	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of minutes between when a party is notified and when they receive a reminder.
PlaceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The location ID for this record.
ResourceCapacity	Type int Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The capacity for this resource.
ResourceOccupancyCount	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The occupancy count for this resource.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The status of the queue. Possible values are: - closed - open - paused

LocationWaitlistedParty

Represents a specific party of people waiting in a queue. This object is available in API version 50.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A brief description of this queue.

Field	Details
EntryDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time a party is added to the queue.
EstimatedWaitHours	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The estimated hours of wait time for a party.
EstimatedWaitMinutes	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The estimated minutes of wait time for a party.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date on which the record was last viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update

Field	Details
	Description The name of the group.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner for this record.
PartySize	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The size of the queued party.
PartyStatus	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The state of a party in the queue. Possible values are: • canceled • entered • exited • ready • waiting
SignUpDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time when a party signed up for the queue.
WaitlistId	Type reference Properties Create, Filter, Group, Sort, Update

Field	Details
	Description The ID for the queue.

LoginAsEventLog

LoginAsEventLog contains details about when a user logs in as another user in your org. This object is available in API version 61.0 and later.



Note: This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
ClientId	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
CpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DelegatedUserIdentifier	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description Unique ID that identifies the user who's logging in as, or impersonating, another user. For example: 00530000009M943.
DelegatedUserName	Type string Properties Filter, Group, Nillable, Sort Description The username of the user who's logging in as, or impersonating, another user.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
RequestIdIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same RequestIdentifier. For example: 3nWgxWbDKWWDIk0FKfF5DV.
RunTime	Type double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds.
SessionKey	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The impersonated user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For Login Event Type, this field is usually null because the event is captured before a session is created. For example: d7DEq/ANa7nNZZVD.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: /home/home.jsp.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description Unique ID that identifies the user who is being logged in as, or impersonated, by another user. For example: 005000000000123.

LoginEvent

The documentation has moved to [LoginEvent](#) in the *Platform Events Developer Guide*.

LoginEventLog

Login event logs contain details about your Salesforce org's user login history. This object is available in API version 61.0 and later.



Note: This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
ApiType	Type string Properties Filter, Group, Nillable, Sort Description The type of API request. Possible values are: • D—Apex Class • E—SOAP Enterprise • I—SOAP Cross Instance • M—SOAP Metadata • O—Old SOAP • P—SOAP Partner • S—SOAP Apex • T—SOAP Tooling • X—XmlRPC • f—Feed • l—Live Agent • p—SOAP ClientSync
ApiVersion	Type int Properties Filter, Group, Nillable, Sort Description The version of the API that's being used. For example: 36.0.
AuthenticatedMethodReference	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The authentication method used by a third-party identification provider for an OpenID Connect single sign-on protocol.
BrowserType	Type string Properties Filter, Group, Nillable, Sort Description The identifier string returned by the browser used at login. Example values are: - Go-http-client/1.1 - Mozilla/5.0 (Macintosh; Intel Mac OS X 10.12; rv%3A50.0) Gecko/20100101 Firefox/50.0 - Mozilla/5.0 (Macintosh; Intel Mac OS X 10_11_6) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/51.0.2704.84 Safari/537.36
CipherSuite	Type string Properties Filter, Group, Nillable, Sort Description The TLS cipher suite used for the login. Values are OpenSSL-style cipher suite names, with hyphen delimiters. For more information, see OpenSSL Cryptography and SSL/TLS Toolkit.
ClientIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
CpuTime	Type double Properties Filter, Nillable, Sort

Field	Details
	Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DatabaseTotalTime	Type double Properties Filter, Nillable, Sort Description The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and DatabaseTotalTime. Compare this field to CpuTime to determine whether performance issues are occurring in the database layer or in your own code.
ForwardedForIp	Type string Properties Filter, Group, Nillable, Sort Description Reserved for future use.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
LoginStatus	Type double Properties Filter, Nillable, Sort Description The status of the login attempt. For successful logins, the value is LOGIN_NO_ERROR. All other values indicate errors or authentication issues. For details, see Login Event Type — LOGIN_STATUS Values on page 2306.
LoginSubType	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The type of login flow used. Possible values are: • uiup—UI Username-Password • oauthpassword—OAuth Username-Password • oauthtoken—OAuth User-Agent • oauthhybridtoken—OAuth User-Agent for Hybrid Apps • oauthtokenidtoken—OAuth User-Agent with ID Token • oauthclientcredential—OAuth Client Credential • oauthcode—OAuth Web Server • oauthhybridauthcode—OAuth Web Server for Hybrid Apps
LoginType	Type string Properties Filter, Group, Nillable, Sort Description The type of login used to access the session. Possible values are: • 7—AppExchange • A—Application • s—Certificate-based login • k—Chatter Communities External User • n—Chatter Communities External User Third Party SSO • r—Employee Login to Community • z—Lightning Login • l—Networks Portal API Only • 6—Remote Access Client • i—Remote Access 2.0 • l—Other Apex API • R—Partner Product • w—Passwordless Login • 3—Customer Service Portal • q—Partner Portal Third-Party SSO • 9—Partner Portal • 5—SAML Idp Initiated SSO • m—SAML Chatter Communities External User SSO • b—SAML Customer Service Portal SSO • c—SAML Partner Portal SSO

Field	Details
	• h—SAML Site SSO • 8—SAML Sfdc Initiated SSO • E—SelfService • j—Third Party SSO
RequestIdIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestIdIdentifier</code>. For example: 3nWgxWbDKWWDIk0FKfF5DV.
RequestStatus	Type string Properties Filter, Group, Nillable, Sort Description The status of the request for a page view or user interface action. Possible values are: • S—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned. • F—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only. • U—Undefined • A—Authorization Error • R—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page. • N—Not Found. 404 error.
RunTime	Type double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds.
SessionKey	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For Login Event Type, this field is usually null because the event is captured before a session is created. For example: d7DEq/ANa7nNZZVD.
SourceIp	Type string Properties Filter, Group, Nillable, Sort Description The source IP of the login request.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
TransportLayerSecurityProtocol	Type string Properties Filter, Group, Nillable, Sort Description The TLS protocol used for the login. Possible values are: • 1.0 • 1.1 • 1.2
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: /home/home.jsp.

Field	Details
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.
UserName	Type string Properties Filter, Group, Nillable, Sort Description The username that's used for login.
UserType	Type string Properties Filter, Group, Nillable, Sort Description The category of user license. Possible values are: • CsnOnly—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users. • CspLitePortal—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site. • CustomerSuccess—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. • Guest—Users whose access is limited so that your customers can view and interact with your site without logging in. • PowerCustomerSuccess—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy. • PowerPartner—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site. • SelfService—Users whose access is limited because they're organization customers and access the application through a self-service portal. • Standard—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

Field	Details
Username	Type string Properties Filter, Group, Nillable, Sort Description The username that's used for login.

LoginGeo

Represents the geographic location of the user's IP address for a login event. Due to the nature of geolocation technology, the accuracy of geolocation fields (for example, country, city, postal code) may vary. This object is available in API version 34.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Only users with Manage Users permissions can access this object.

Fields

Field	Details
City	Type string Properties Filter, Group, Nillable, Sort Description The city where the user's IP address is physically located. This value is not localized.
Country	Type string Properties Filter, Group, Nillable, Sort Description The country where the user's IP address is physically located. This value is not localized.
CountryIso	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The ISO 3166 code for the country where the user's IP address is physically located. For more information, see Country Codes - ISO 3166
Latitude	Type double Properties Filter, Nillable, Sort Description The latitude where the user's IP address is physically located.
LoginTime	Type dateTime Properties Filter, Sort Description Time of the login attempt, in GMT time zone.
Longitude	Type double Properties Filter, Nillable, Sort Description The longitude where the user's IP address is physically located.
PostalCode	Type string Properties Filter, Group, Nillable, Sort Description The postal code where the user's IP address is physically located. This value is not localized.
Subdivision	Type string Properties Filter, Group, Nillable, Sort Description The name of the subdivision where the user's IP address is physically located. In the U.S., this value is usually the state name (for example, Pennsylvania). This value is not localized.

Usage

The API allows you to do many powerful queries. A few examples are:

Sample Query	Query String
Query showing the country for a login event, where Id=LoginGeoId from AuthSession	<code>SELECT Country FROM LoginGeo WHERE Id = 'OLE#####'</code>
Query showing the city and postal code for a login event, where Id=LoginGeoId from LoginHistory	<code>SELECT City, PostalCode FROM LoginGeo WHERE Id = 'OSO#####'</code>

LoginHistory

Represents the login history for all successful and failed login attempts for organizations and enabled portals. This object is available in API version 21.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Special Access Rules

With one exception, only users with Manage Users or Monitor Login History permissions can access this object. The exception is that, in API version 37.0 and later, all users can retrieve their own login history records.

Fields

Field	Details
ApiType	Type string Properties Group, Nillable, Sort Description Indicates the API type, for example <code>Soap Enterprise</code>. Label is API Type.
ApiVersion	Type string Properties Group, Nillable, Sort Description Displays the API version used by the client. Label is API Version.

Field	Details
Application	Type string Properties Group, Nillable, Sort Description The application used to access the organization. Label is Application.
AuthMethodReference	Type string Properties Filter, Group, Nillable, Sort Description The authentication method used by a third-party identification provider for an OpenID Connect single sign-on protocol. This field is available in API version 51.0 and later. Label is Authentication Method Reference.
AuthenticationServiceId	Type reference Properties Filter, Group, Nillable, Sort Description The 18-character ID for an authentication service for a login event. For example, you can use this field to identify the SAML or authentication provider configuration with which the user logged in. This field is available in API version 34.0 and later. Label is Authentication Service Id. This field is a polymorphic relationship field. Relationship Name AuthenticationService Relationship Type Lookup Refers To AuthProvider, SamlSsoConfig
Browser	Type string Properties Group, Nillable, Sort Description The current browser version. Label is Browser.
CipherSuite	Type picklist

Field	Details
	Properties Filter, Group, Nillable, Restricted picklist, Sort Description The TLS cipher suite used for the login. Values are OpenSSL-style cipher suite names, with hyphen delimiters. For more information, see OpenSSL Cryptography and SSL/TLS Toolkit. This field is available in API version 37.0 and later.
ClientVersion	Type string Properties Group, Nillable, Sort Description Version of the API client. Label is Client Version.
CountryIso	Type string Properties Filter, Group, Nillable, Sort Description The ISO 3166 code for the country where the user's IP address is physically located. For more information, see Country Codes - ISO 3166. This field is available in API version 37.0 and later.
ForwardedForIp	Type string Properties Filter, Group, Nillable, Sort Description The value in the <code>X-Forwarded-For</code> header of HTTP requests sent by the client. For logins that use one or more HTTP proxies, the <code>X-Forwarded-For</code> header is sometimes used to store the origin IP and all proxy IPs. The <code>ForwardedForIp</code> field stores whatever value the client sends, which might not be an IP address. The maximum length is 256 characters. Longer values are truncated. The <code>ForwardedForIp</code> field isn't populated for logins completed via OAuth flows or single sign-on (SSO). Available in API version 61.0 and later.
LoginGeoId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description The 18-character ID for the record of the geographic location of the user for a successful or unsuccessful login event. The accuracy of geolocation fields like country, city, or postal code can vary because of the nature of the technology. The Manage Users permission is required for accessing this field. This field is available in API version 34.0 and later. This field is a relationship field. Relationship Name LoginGeo Relationship Type Lookup Refers To LoginGeo
LoginSubType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of login flow used. - InternalSalesforceAuthentication—Internal Salesforce Authentication - This subtype is for internal use only. - OAuthClientCredentials—OAuth Client Credentials - OAuthHybridRefreshToken—OAuth Refresh Token for Hybrid Apps - OAuthHybridTokenExchange—OAuth Token Exchange for Hybrid Apps - OAuthHybridUserAgent—OAuth User-Agent for Hybrid Apps - OAuthHybridWebServer—OAuth Web Server for Hybrid Apps - OAuthOtpLogin—OAuth OTP Login - OAuthRefreshToken—OAuth Refresh Token - OAuthTokenExchange—OAuth Token Exchange - OAuthUserAgent—OAuth User-Agent - OAuthUserAgentIdToken—OAuth User-Agent with ID Token - OAuthUsernamePassword—OAuth Username-Password - OAuthWebServer—OAuth Web Server - SoapApiLogin—SOAP API - This subtype is for internal use only.

Field	Details
	• SoapApiLoginMobile-SOAP API (Mobile) This subtype is for internal use only. • SoapApiLoginNetworksPortal-SOAP API (Networks Portal) This subtype is for internal use only. • SoapApiLoginPortal-SOAP API (Portal) This subtype is for internal use only. • SoapApiLoginSelfService-SOAP API (Self-Service) This subtype is for internal use only. • UiPasswordReset-UI Password Reset • UsernamePasswordUiLogin-UI Username-Password Label is Login Subtype.
LoginTime	Type dateTime Properties Filter, Sort Description Time zone is based on GMT. Label is Login Time.
LoginType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of login used to access the session. • AppExchange-AppExchange • Application-Application • Certificate-Certificate-based login • ChatterCommunityPortalUnPwd-Chatter Communities External User • ChatterCommunityThirdPartySso-Chatter Communities External User Third Party SSO • CrossTenantLogin-Cross Tenant Login—For internal use only. • EmployeeLoginToCommunity-Employee Login to Community • HelpAndTraining-Help And Training • IeOfflineClient-Offline Client • LightningLogin-Lightning Login • NetworksPortalApiOnly-Networks Portal API Only

Field	Details
	• Oauth, Remote Access Client-Remote Access Client • Oauth2, Remote Access 2.0-Remote Access 2.0 • OtherApi-Other Apex API • Partner-Partner Product • PasswordlessLogin-Passwordless Login • PasswordlessPasskeyLogin-Passwordless Login via Passkeys (beta) Passwordless login with passkeys is a pilot or beta service that is subject to the Beta Services Terms at Agreements - Salesforce.com or a written Unified Pilot Agreement if executed by Customer, and applicable terms in the Product Terms Directory. Use of this pilot or beta service is at the Customer's sole discretion. • Portal-Customer Service Portal • PortalThirdPartySso-Customer Service Portal Third-Party SSO • PrmPortalThirdPartySso-Partner Portal Third-Party SSO • PrmPortal-Partner Portal • Saml-SAML Idp Initiated SSO • SamlChatterNetworks-SAML Chatter Communities External User SSO • SamlCspPortal-SAML Customer Service Portal SSO • SamlPrmPortal-SAML Partner Portal SSO • SamlSite-SAML Site SSO • Saml2-SAML Sfdc Initiated SSO • SelfService-SelfService • ThirdPartySso-Third Party SSO Label is Login Type.
LoginUrl	Type string Properties Filter, Group, Nillable, Sort Description URL from which the login request is coming. Label is Login URL.
NetworkId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description The ID of the Experience Cloud site that the user is logging in to. This field is available in API version 31.0 and later, if Salesforce Experience Cloud sites are enabled for your org.
OptionsIsGet	Type boolean Properties Filter Description The HTTP method used for the session login is a GET request.
OptionsIsPost	Type boolean Properties Filter Description The HTTP method used for the session login is a POST request.
Platform	Type string Properties Group, Nillable, Sort Description Operating system on the login machine. Label is Platform.
SourceIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the incoming client request that first reaches Salesforce during a login. For example, 126.7.4.2. For clients that redirect through one or more HTTP proxies, this field stores the IP address of the first proxy to reach Salesforce. To better identify the origin IP for these cases, check the ForwardedForIp field instead. The SourceIp field doesn't support the LIKE comparison operator.
Status	Type string Properties Group, Nillable, Sort

Field	Details
	Description Displays the status of the attempted login. Status is either success or a reason for failure. Label is Status.
TlsProtocol	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The TLS protocol used for the login. Possible values are: • TLS 1.0 • TLS 1.1 • TLS 1.2 • TLS 1.3 • Unknown This field is available in API version 37.0 and later.
UserId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the user logging in. Label is User ID.

Usage

Not all fields are filterable. You can only filter on the following fields:

- AuthenticationServiceId
- CipherSuite
- CountryIso
- Id
- LoginTime
- LoginType
- LoginUrl
- NetworkId
- OptionsIsGet
- OptionsIsPost
- TlsProtocol
- UserId

The API allows you to do many powerful queries. A few examples are:

Sample Query	Query String
Simple query showing UserId & LoginTime for each user	<code>SELECT UserId, LoginTime from LoginHistory;</code>
Query showing logins only after a specified date and time	<code>SELECT UserId, LoginTime from LoginHistory WHERE LoginTime > 2010-09-20T22:16:30.000Z;</code>
Query showing logins for a specific time interval	<code>SELECT UserId, LoginTime from LoginHistory WHERE LoginTime > 2010-09-20T22:16:30.000Z AND LoginTime < 2010-09-21T22:16:30.000Z;</code>
Query showing the authentication service for a SAML login event, where Id=AuthenticationServiceId from LoginHistory	<code>SELECT DeveloperName, Issuer, Version FROM SamlSsoConfig WHERE Id = 'OLE#####'</code>
Query showing the authentication service for an authentication provider login event, where Id=AuthenticationServiceId from LoginHistory	<code>SELECT Type, DeveloperName FROM AuthProvider WHERE Id = 'OSO#####'</code>

LoginIp

Represents a validated IP address. This object is available in version 28.0 and later.

Supported Calls

`describeSObjects()`, `delete()`, `query()`, `retrieve()`

Fields

Field	Details
ChallengeMethod	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The challenge method used to confirm the user's identity. Possible values include the following. - Email - SMS - TOTP_CHOICE: The user chooses multi-factor authentication. - TOTP_ONLY: The user is required to use multi-factor authentication.

Field	Details
ChallengeSentDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the user was authenticated.
IsAuthenticated	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code> , the user has already been authenticated.
SourceIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address the user logged in from.
UsersId	Type reference Properties Filter, Group, Sort Description The ID of the user associated with this item. This is a relationship field. Relationship Name Users Relationship Type Lookup Refers To User

Usage

At every login, the IP address of the login request is checked against the validated IP addresses using LoginIp. A match means the login IP address is a known IP address. If there's no match, the address is unknown, and the user is asked to confirm their identity.

LogoutEventLog

Contains details of user sessions ending or being revoked. This object is available in API version 65.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
ApiType	Type Contains details of user sessions ending or being revoked. string Properties Filter, Group, Nillable, Sort Description The type of API request. Possible values are: • D—Apex Class • E—SOAP Enterprise • M—SOAP Metadata • P—SOAP Partner • S—SOAP Apex • T—SOAP Tooling • f—Feed • l—Live Agent • p—SOAP ClientSync
ApiVersion	Type int Properties Filter, Group, Nillable, Sort Description The version of the API that’s being used. For example: 36.0.

Field	Details
AppType	Type double Properties Filter, Nillable, Sort Description The application type that was in use upon logging out. Example Values • 1000: Application • 1007: SFDC Application • 1014: Chat • 2501: CTI • 2514: OAuth • 3475: SFDC Partner Portal
BrowserType	Type string Properties Filter, Group, Nillable, Sort Description The identifier string returned by the browser used at login. Example values are: • Go-http-client/1.1 • Mozilla/5.0 (Macintosh; Intel Mac OS X 10.12; rv%3A50.0) Gecko/20100101 Firefox/50.0 • Mozilla/5.0 (Macintosh; Intel Mac OS X 10_11_6) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/51.0.2704.84 Safari/537.36
ClientIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
ClientVersion	Type double

Field	Details
	Properties Filter, Nillable, Sort Description The version of the client that was in use upon logging out.
IsUserInitiatedLogout	Type boolean Properties Defaulted on create, Filter, Group, Sort Description The value is 1 if the user intentionally logged out of the organization by clicking the Logout button. If the user's session timed out due to inactivity or another implicit logout action, the value is 0.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
PlatformType	Type double Properties Filter, Nillable, Sort Description The code for the client platform. If a timeout caused the logout, this field is null. Example Values • 1000: Windows • 1008: Windows 2003 • 1013: Windows 8.1 • 1015: Windows 10 • 2003: Macintosh/Apple OSX • 4000: Linux • 5005: Android • 5006: iPhone • 5007: iPad • 5200: Android 10.0

Field	Details
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.
ResolutionType	Type double Properties Filter, Nillable, Sort Description The screen resolution of the client. If a timeout caused the logout, this field is null.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.
SessionLevel	Type string Properties Filter, Group, Nillable, Sort Description The security level of the session that was used when logging out.
SessionType	Type string Properties Filter, Group, Nillable, Sort Description The session type that was used when logging out. Possible Values • A: API • I: APIOnlyUser • N: ChatterNetworks • z: ChatterNetworksAPIOnly

Field	Details
	- C: Content - P: OAuthApprovalUI - O: OAuth2 - T: SiteStudio - R: SitePreview - S: SubstituteUser - B: TempContentExchange - G: TempOAuthAccessTokenFrontdoor - Y: TempVisualforceExchange - F: TempUIFrontdoor - U: UI - E: UserSite - V: Visualforce - W: WDC_API
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example: 20130715233322.670. When a customer logs out by using the Logout button, the TIMESTAMP field records the actual logout time. However, when a customer is logged out automatically, Salesforce detects the event by using a process that runs every 15 minutes. TIMESTAMP values can reflect a logout time up to 15 minutes later than the actual automatic logout time.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943
UserType	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The category of user license of the user accessing Salesforce services through the UI or API.

LogoutEventStream

The documentation has moved to [LogoutEventStream](#) in the *Platform Events Developer Guide*.

LookedUpFromActivity

This read-only object is displayed as a related list on an activity record (an event or a task); the list contains records that have custom lookup relationships from the activity to another object. This object is not queryable.

Supported Calls

`describeSObjects()`

Fields

Field Name	Details
AccountId	Type reference Properties Filter, Group, Nillable, Sort Description Indicates the ID of the related account, which is determined as follows: • The account associated with the <code>whatId</code>, if it exists; or • The account associated with the <code>whoId</code>, if it exists; otherwise • <code>null</code> For information on IDs, see Field Types This is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account

Field Name	Details
ActivityDate	Type date Properties Filter, Group, Nillable, Sort Description Indicates one of the following: • The due date of a task • The date of an event if <code>IsAllDayEvent</code> is set to <code>true</code> This field has a time stamp that is always set to midnight in the Universal Time Coordinated (UTC) time zone. The time stamp doesn't represent the time of the activity; don't attempt to alter it to accommodate time zone differences. Label is <code>Date</code>.
ActivityDateTime	Type dateTime Properties Aggregate, Filter, Nillable, Sort Description Contains the event's due date if the <code>IsAllDayEvent</code> flag is set to <code>false</code>. The time portion of this field is always transferred in the Coordinated Universal Time (UTC) time zone. Translate the time portion to or from a local time zone for the user or the application, as appropriate. Label is Due Date Time. The value for this field and <code>StartDateTime</code> must match, or one of them must be <code>null</code>.
ActivitySubtype	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Provides standard subtypes to facilitate creating and searching for specific activity subtypes. This field isn't updateable. Possible values are: • Task • Email • Call • Event • LinkedIn —Available in API version 56.0 and later. • List Email

Field Name	Details
ActivityType	Type picklist Properties Filter, Group, Nillable, Sort Description Represents one of the following values: Call, Email, Meeting, or Other. Label is Type. These are default values, and can be changed. ActivityType is the union of TaskType and EventType. If the same activity appears in both dynamic picklists, duplicate activities appear. TaskType and EventType can each have a Call type. Internally, they are distinct from each other.
CallDisposition	Type string Properties Filter, Group, Nillable, Sort Description Represents the result of a given call; for example, "we'll call back," or "call unsuccessful." Limit is 255 characters.
CallDurationInSeconds	Type int Properties Filter, Group, Nillable, Sort Description Duration of the call in seconds.
CallObject	Type string Properties Filter, Group, Nillable, Sort Description Name of a call center. Limit is 255 characters.
CallType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of call being answered: Inbound, Internal, or Outbound.

Field Name	Details
CompletedDateTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time the task was saved with a Closed status. - For insert, if the task is saved with a Closed status the field is set. If the task is saved with an Open status the field is set to NULL. - For update, if the task is saved with a new Closed status, the field is reset. If the task is saved with a new non-closed status, the field is reset to NULL. If the task is saved with the same closed status (that is, unchanged) there is no change to the field.  Note: The status is a dynamic enum. If the Closed mapping is changed it won't cause an update of existing tasks. Only new insert/update operations are affected.
Description	Type textarea Properties Nillable Description Contains a description of the event or task. Limit is 32 KB.
DurationInMinutes	Type int Properties Filter, Group, Nillable, Sort Description Indicates the duration of the event or task.
EndTime	Type dateTime Properties Filter, Nillable, Sort Description Indicates the end date and time of the event or task. Available in versions 27.0 and later. This field is optional, depending on the following: If <code>IsAllDayEvent</code> is true, you can supply a value for either <code>DurationInMinutes</code> or <code>EndTime</code>. Supplying values in both fields is allowed if the values add up to the same amount of time. If both fields are null, the duration defaults to one day.

Field Name	Details
	If <code>IsAllDayEvent</code> is false, a value must be supplied for either <code>DurationInMinutes</code> or <code>EndTime</code>. Supplying values in both fields is allowed if the values add up to the same amount of time.
<code>IsAllDayEvent</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If the value of this field is set to <code>true</code>, then the activity is an event spanning a full day, and the <code>ActivityDate</code> defines the date of the event. If the value of this field is set to <code>false</code>, then the activity may be an event spanning less than a full day, or it may be a task. The default value of this field is <code>false</code>. Label is <code>All-Day Event</code>.
<code>IsClosed</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a task is closed (<code>true</code>) or not closed (<code>false</code>). The default value of this field is <code>false</code>. This field is set indirectly by setting <code>Status</code> on the task—each picklist value has a corresponding <code>IsClosed</code> value. Label is <code>Closed</code>.
<code>IsHighPriority</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates a high-priority task. The default value of this field is <code>false</code>. This field is derived from the <code>Priority</code> field.
<code>IsReminderSet</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a reminder is set for an activity (<code>true</code>) or not (<code>false</code>). The default value of this field is <code>false</code>.
<code>IsTask</code>	Type boolean

Field Name	Details
	Properties Defaulted on create, Filter, Group, Sort Description If the value of this field is set to <code>true</code>, then the activity is a task; if the value is set to <code>false</code>, then the activity is an event. The default value of this field is <code>false</code>. Label is Task.
IsVisibleInSelfService	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If the value of this field is set to <code>true</code>, then the activity can be viewed in the self-service portal. The default value of this field is <code>false</code>. Label is Visible in Self-Service.
Location	Type string Properties Filter, Group, Nillable, Sort Description If the activity is an event, then this field represents the location of the event. If the activity is a task, then the value is <code>null</code>.
OwnerId	Type reference Properties Filter, Group, Nillable, Sort Description Indicates the ID of the user or group who owns the activity. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Calendar, Group, User
Priority	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Sort

Field Name	Details
	Description Indicates the priority of a task, such as high, normal, or low. The default value of this field is <code>Normal</code>.
ReminderDateTime	Type dateTime Properties Filter, Nillable, Sort Description Represents the time at which a reminder is scheduled to fire if <code>IsReminderSet</code> is set to <code>true</code>. If <code>IsReminderSet</code> is set to <code>false</code>, then either the user has deselected the reminder checkbox in the user interface or the reminder has already fired at the time indicated by the value.
StartDateTime	Type dateTime Properties Filter, Nillable, Sort Description Indicates the start date and time of the event. Available in versions 13.0 and later. The <code>StartDateTime</code> field contains the event start date. However, if the event's <code>IsAllDayEvent</code> flag is set to <code>true</code> (indicating an all-day event), then the time stamp in the <code>StartDateTime</code> field is always set to midnight in the Coordinated Universal Time (UTC) time zone. Don't attempt to alter the time stamp to account for any time zone differences. If the event's <code>IsAllDayEvent</code> flag is set to <code>false</code>, then you must translate the time portion of the time stamp in the <code>StartDateTime</code> field to or from a local time zone for the user or the application, as appropriate, and the translation must be in the Coordinated Universal Time (UTC) time zone. If this field has a value, then <code>ActivityDate</code> and <code>ActivityDateTime</code> either must be <code>null</code> or must match the value of this field.
Status	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Sort Description Indicates the current status of a task. The default value of this field is <code>Not Started</code>. Each predefined status field sets a value for <code>IsClosed</code>. Possible values are: - Completed - Deferred

Field Name	Details
	- In Progress - Not Started - Waiting on someone else
Subject	Type combobox Properties Filter, Nillable, Sort Description Contains the subject of the task or event.
WhatId	Type reference Properties Filter, Group, Nillable, Sort Description The <code>WhatId</code> represents nonhuman objects such as accounts, opportunities, campaigns, cases, or custom objects. <code>WhatIds</code> are polymorphic. Polymorphic means a <code>WhatId</code> is equivalent to the ID of a related object. The label is <code>Related To ID</code>. This is a polymorphic relationship field. Relationship Name What Relationship Type Lookup Refers To Account, Accreditation, AssessmentIndicatorDefinition, AssessmentTask, AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskOrder, Asset, AssetRelationship, AssignedResource, Award, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, Campaign, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis, CareInterventionType, CareMetricTarget, CareObservation, CareObservationComponent, CarePgmProvHealthcareProvider, CarePreauth, CarePreauthItem, CareProgram, CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee, CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider, CareProgramTeamMember, CareProviderAdverseAction, CareProviderFacilitySpecialty, CareProviderSearchableField, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareSpecialtyTaxonomy, CareTaxonomy, Case, CommSubscriptionConsent, ContactEncounter, ContactEncounterParticipant, ContactRequest, Contract, CoverageBenefit, CoverageBenefitItem, CreditMemo, DelegatedAccount, DocumentChecklistItem, EnrollmentEligibilityCriteria,

Field Name	Details
	HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, IdentityDocument, Image, IndividualApplication, Invoice, ListEmail, Location, MemberPlan, Opportunity, Order, OtherComponentTask, PartyConsent, PersonLifeEvent, PlanBenefit, PlanBenefitItem, ProcessException, Product2, ProductItem, ProductRequest, ProductRequestLineItem, ProductTransfer, PurchaserPlan, ReceivedDocument, ResourceAbsence, ReturnOrder, ReturnOrderLineItem, ServiceAppointment, ServiceResource, Shift, Shipment, ShipmentItem, Solution, Visit, VisitedParty, VolunteerProject, WorkOrder, WorkOrderLineItem
WhoId	Type reference Properties Filter, Group, Nillable, Sort Description The Whold represents a human such as a lead or a contact. Wholds are polymorphic. Polymorphic means a Whold is equivalent to a contact's ID or a lead's ID. The label is Name ID. This is a polymorphic relationship field. Relationship Name Who Relationship Type Lookup Refers To Contact, Lead

Usage

Query activities related to an object

1. Optionally, issue a describe call against the object whose activities you wish to query, to get a suggestion of the correct SOQL to use.
2. Issue a SOQL relationship query with a main clause that references the object, and an inner clause that references the activity custom lookup relationship; for example:

```
SELECT id, name,
(SELECT id, subject from sponsoredact__r)
FROM Contact
```

In this example *sponsoredact__r* is a user defined relationship list.

The user interface enforces sharing rules, filtering out related-list items that a user doesn't have permission to see.

The following restrictions on users who don't have "View All Data" permission help prevent performance issues:

- In the main clause of the relationship query, you can reference only one record. For example, you can't filter on all records where the account name starts with 'A'; instead, you must reference a single account record.
- In the inner clause of the query, you can't use `WHERE`.
- In the inner clause of the query, you must specify a limit of 500 or fewer on the number of rows that are returned in the list.
- You must sort on `ActivityDate` in descending order and `LastModifiedDate` in descending order; you can display nulls last. For example: `ORDER BY ActivityDate DESC NULLS LAST, LastModifiedDate DESC`.

Macro

Represents a macro, which is a set of instructions that tells the system to perform one or more tasks. This object is available in API version 32.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Fields

Field	Details
Description	Type textarea Properties Create, Nillable, Update Description Description of what this macro does.
FolderId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Returns the ID of the folder that contains the macro. Available in API version 44.0 and later.
FolderName	Type string Properties Filter, Nillable, Sort Description Name of the folder that contains the macro. Available in API version 44.0 and later.

Field	Details
IsAlohaSupported	Type boolean Properties Defaulted on create, Filter Description Specifies whether the macro is supported in Salesforce Classic.
IsLightningSupported	Type boolean Properties Defaulted on create, Filter Description Specifies whether the macro is supported in Lightning Experience.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the macro record was last referenced.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the macro record was last viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the macro.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of the session record.

Field	Details
StartingContext	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The object the macro performs actions on. In Salesforce Classic, macros are supported on objects with both feed-based layouts and quick actions. In Lightning Experience, macros are supported on standard and custom objects that allow quick actions and have a customizable page layout.

Usage

A macro definition consists of a Macro object and several associated [MacroInstruction](#) objects.

First, create a Macro object. Then, create MacroInstructions that specify objects, operations, conditions, and targets for the macro.

A macro contains an ordered list of macro instructions whose index field, `sortOrder`, is 0-based. If there's an incorrect sequence of macro instructions, the macro doesn't execute.

If you update a macro definition or add or remove instructions from a macro, make sure that the `sortOrder` field that defines the execution order is correct. To delete an entire macro definition, invoke the delete operation on the Macro object.

The table describes the supported macro instruction targets and how they relate to each other.



Note: Strings indicated by `<brackets>` are variables. The variable description describes the required type. For example, `Tab.<EntityApiName>` requires the entity name. If your custom entity name is `MyCustomObject`, your target API is `Tab.MyCustomObject__c`.

If a macro instruction listed in the table supports an implicit operation, you can use that operation as a direct child instruction without explicitly specifying a target. The hyphens used in the table illustrate the hierarchical relationship between targets. A target isn't available if its parent isn't.

Table 1: Macro Instruction Target Grammar and Hierarchy

Target API Name	Supported Operations
<code>Tab.<EntityApiName></code>	SELECT, CLOSE (implicit)
- <code>QuickAction.<EntityApiName>.<QuickActionName></code>	SELECT, SUBMIT (implicit)
- - <code>Field.<QATargetEntityApiName>.<FieldApiName></code>	SET
- - <code>Field.<QATargetEntityApiName>.<MultilineTextFieldApiName>.cursor</code>	INSERT
- - <code>Field.<QATargetEntityApiName>.<SinglelineTextFieldApiName>.end</code>	INSERT
- <code>QuickAction.Case.Email</code>	SELECT, SUBMIT (implicit)
- - <code>Field.EmailMessage.<FieldApiName></code>	SET
- - <code>Field.EmailMessage.<MultilineTextFieldApiName>.cursor</code>	INSERT

Target API Name	Supported Operations
- - Field.EmailMessage.<SinglelineTextFieldApiName>.end	INSERT
- - Field.EmailTemplate	SET
- SidebarCmp.Knowledge	SELECT
- - SearchAction.KnowledgeArticle	SELECT
- - - Field.SearchString	SET, INSERT
- - - Command.Search	SUBMIT
- - SearchResult.KnowledgeArticle.MostRecentItem	SELECT
- - - Command.AttachToRecord	SUBMIT
- - - Command.InsertToEmail	SUBMIT
- - - Command.AttachToEmailAsPDF	SUBMIT



Example: This example describes a macro that opens a quick action, sets some fields in the quick action, and submits the quick action.

```

0. SELECT Tab.Case
1.   SELECT QuickAction.Case.Email
2.     SET Field.EmailMessage.Subject
3.     SET Field.EmailMessage.ToAddress
4.     INSERT Field.EmailMessage.HtmlBody.cursor
5.     SUBMIT

```

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

MacroChangeEvent (API version 48.0)

Change events are available for the object.

MacroHistory

History is available for tracked fields of the object.

MacroOwnerSharingRule

Sharing rules are available for the object.

MacroShare

Sharing is available for the object.

MacroInstruction

Represents an instruction in a macro. An instruction can specify the object that the macro interacts with, the context or publisher that the macro works within, the operation or action that the macro performs, and the target of the macro's actions.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
MacroId	Type reference Properties Create, Filter, Group, Sort Description ID of the macro that contains this instruction.
Name	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description Name of the instruction.
Operation	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The action that the macro instruction performs. Valid values are: • Select • Set • Insert • Submit • Close To create macro instructions that execute conditionally, these values are available in API version 46.0 and later. • IF • ELSEIF • ELSE • ENDIF
SortOrder	Type int

Field Name	Details
	Properties Create, Filter, Group, Sort, Update Description Order of this instruction in the macro.
Target	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The object that's the target of the operation. For example, the target for the active case tab (Tab.Case) or a quick action, like the Send Email action on the case object (QuickAction.Case.SendEmail). In Lightning Experience, macros are supported on standard and custom objects that allow quick actions and have a customizable page layout. In Salesforce Classic, macros are supported on objects with feed-based layouts and quick actions. You can specify relative dates and times for the following targets. • DateTime • Date • Time • DueDate • Birthday
Value	Type string Properties Create, Filter, Nillable, Sort, Update Description Value of a field. If the operation is Select, then the value is null, because the operation selects the object on which the macro performs an action. An instruction can contain both a <code>Value</code> field and a <code>ValueRecord</code> field, but only one of these fields can have a value. The other field value must be null. To create relative dates and times, specify a valid Salesforce formula, prefaced by <code>MacroFormula</code>. For example, the following formula creates a date that is 1 day from now: <code>MacroFormula:NOW() + 1</code> You can't edit custom relative formulas in the Macro Builder.
ValueRecord	Type string

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description ID of the value or record. The <code>ValueRecord</code> can be either a value or a record, but not both. An instruction can contain both a <code>Value</code> field and a <code>ValueRecord</code> field, but only one of these fields can have a value. The other field value must be null.

Usage

MacroInstructions can specify objects, operations, conditions, and targets. For example, a macro containing these instructions performs a quick action that sends an email.

```
Select Email QuickAction
Set Subject...
Set To...
Set Body...
Submit
```

You can create conditional macros using `IF`, `ELSEIF`, `ELSE`, and `ENDIF` as operations. In a conditional statement, the [ExpressionFilter](#) and [ExpressionFilterCriteria](#) objects are used to control which instructions execute. The `ExpressionFilter` object lets you define a logical expression with one or more conditions. It uses a child object, `ExpressionFilterCriteria`, to represent each condition that is evaluated.


For example, consider the following conditional statement and macro instructions.

```
IF (Case.Status EQUALS New) AND (Case.Origin EQUALS Phone)
    Select Email QuickAction
    Set Subject...
    Set To...
    Set Body...
    Submit
ELSE
    Select Update Case Detail
    Update Case Description...
    Submit
ENDIF
```

The `ExpressionFilter` object includes a `FilterConditionLogic` field containing `1 AND 2`, where 1 and 2 are `ExpressionFilterCriteria` objects. The `SortOrder` field in the `ExpressionFilterCriteria` object maps condition 1 to `Case.Status EQUALS New`, and condition 2 to `Case.Origin EQUALS Phone`. If the conditional statement evaluates to true, then the instructions in the `IF` block are executed; otherwise, the instructions in the `ELSE` block are executed.

Any number of macro instructions can be present inside an `IF`, `ELSEIF`, or `ELSE` block. In addition, conditions can be nested.

Data Model

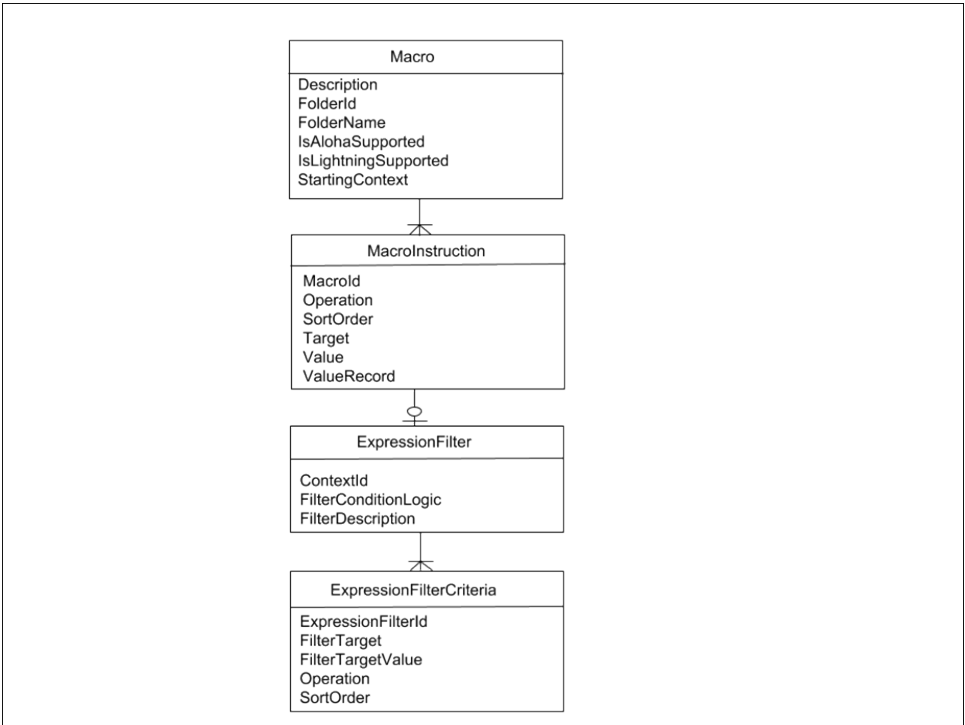

Associated Objects

This object has the following associated objects. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

MacroInstructionChangeEvent (API version 48.0)

Change events are available for the object.

MacroUsage

Represents macro usage on a record, including which macro was used, who used it, and how they used it. This object is available in API version 47.0 and later.

Supported Calls

describeSObjects(), getDeleted(), getUpdated(), query(), retrieve()
delete() is supported in API version 55.0 and later.

Special Access Rules

This object is always read-only. Only users with “Modify All Data” permission can delete MacroUsage records.

Fields

Field	Details
AppContext	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Context in which the macro was run. Possible values are: • Aloha—Salesforce Classic • Lightning—Lightning Experience • Unknown
ConditionCount	Type int Properties Filter, Group, Nillable, Sort Description Number of conditional instructions contained in the macro at execution.
ContextRecord	Type string Properties Filter, Group, Nillable, Sort Description ID of the record on which the macro was run.
DurationInMs	Type int Properties Filter, Group, Nillable, Sort Description The execution time, in milliseconds, for the macro.
ExecutedInstructionCount	Type int Properties Filter, Group, Nillable, Sort Description The number of macro instructions that ran successfully. If the macro completed successfully, this value is the same as InstructionCount.

Field	Details
ExecutionEndTime	Type dateTime Properties Filter, Nillable, Sort Description The time at which macro execution completed.
ExecutionState	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The end state of macro execution. Possible values are • SUCCESS • FAILURE • CANCELED
FailureReason	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description If <code>ExecutionState</code> is failure, this field stores the reason for the failure. Possible values are: • ACCESS • GENERIC • TIMEOUT • UNSUPPORTED
FolderId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the folder containing the macro at the time it was used.
InstructionCount	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of instructions in the macro at the start of execution.
IsFromBulk	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If true, the macro was run as a bulk macro. When a bulk macro is run on multiple records, usage is recorded per record.
MacroID	Type reference Properties Filter, Group, Sort Description ID of the macro.
Name	Type string Properties Filter, Group, idLookup, Sort Description Name of the macro.
OwnerId	Type reference Properties Filter, Group, Sort Description ID of the group or user that owns the macro.
UserId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the user that ran the macro.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

MacroUsageOwnerSharingRule

Sharing rules are available for the object.

MacroUsageShare

Sharing is available for the object.

MailmergeTemplate

Represents a mail merge template (a Microsoft Word document) used for performing mail merges for your organization.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- All users can view this object, but you need the “Customize Application” permission to modify it.
- Customer Portal users can’t access this object.

Fields

Field	Details
Body	Type base64 Properties Create Description Required. Microsoft Word document to use as a mail merge template. Due to limitations with Microsoft Word mail merge templates, your client application can specify the Body field when creating these records, but not when updating them. Limit: 5 MB.
BodyLength	Type int Properties Filter, Group, Nillable, Sort Description Length of the Microsoft Word document.

Field	Details
Category	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of document template. Possible values are: • Document • Envelope • Label The default value is Document.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Required. Text description of this mail merge template. Limit: 255 characters.
Filename	Type string Properties Create, Filter, Group, Sort Description Required. File name of the Microsoft Word document that was uploaded as a mail merge template. Limit: 255 characters in length.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
LastUsedDate	Type dateTime Properties Filter, Nillable, Sort Description Date and time when this MailmergeTemplate was last used.

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Name of this mail merge template.
SecurityOptionsAttachmentHasFlash	Type boolean Properties Create, Filter, Update Description Required. True if Flash Injection was detected in the attachment.
SecurityOptionsAttachmentHasXSSThreat	Type boolean Properties Create, Filter, Update Description Required. True if a cross site scripting threat was detected in the attachment.
SecurityOptionsAttachmentScannedforFlash	Type boolean Properties Create, Filter, Update Description Required. True if the attachment has been scanned for Flash Injection.
SecurityOptionsAttachmentScannedForXSS	Type boolean Properties Create, Filter, Update Description Required. True if the attachment has been scanned for a cross site scripting threat.

Usage

Use this object to manage mail merge templates for your organization.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

MaintenanceAsset

Represents an asset covered by a maintenance plan in field service. Assets can be associated with multiple maintenance plans.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
AssetId	Type reference Properties Create, Filter, Group, Sort, Update Description The asset associated with the maintenance asset.
ContractLineItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Contract line item associated with the maintenance asset. This field can only list a contract line item that is associated with the asset, and whose parent service contract is associated with the parent maintenance plan.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field Name	Details
	Description The date when the maintenance asset was last modified. Its label in the user interface is Last Modified Date.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the product request was last viewed.
MaintenanceAssetNumber	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description An auto-assigned number that identifies the maintenance asset.
MaintenancePlanId	Type reference Properties Create, Filter, Group, Sort Description Maintenance plan associated with the maintenance asset.
NextSuggestedMaintenanceDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The suggested date of service for the maintenance asset's first work order (not the date the work order is created). This corresponds to the work order's SuggestedMaintenanceDate. If left blank when the maintenance asset is created, this field inherits its initial value from the related maintenance plan. This field auto-updates after each batch is generated. Its label in the user interface is Date of the first work order in the next batch.
WorkTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description Work type associated with the maintenance asset. Work orders generated from the maintenance plan inherit its work type's duration, required skills and products, and linked articles. Maintenance assets covered by the plan use the same work type, though you can update them to use a different one.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

MaintenanceAssetChangeEvent (API version 48.0)

Change events are available for the object.

MaintenanceAssetFeed

Feed tracking is available for the object.

MaintenanceAssetHistory

History is available for tracked fields of the object.

MaintenancePlan

Represents a preventive maintenance schedule for one or more assets in field service.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The associated account, which typically represents the customer receiving the maintenance service.

Field Name	Details
ContactId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The associated contact.
Description	Type textarea Properties Create, Nillable, Update Description A brief description of the plan.
DoesAutoGenerateWorkOrders	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Turns on auto-generation of work order batches for a maintenance plan and prohibits the manual generation of work orders via the Generate Work Orders action. If this option is selected, a new batch of work orders is generated for the maintenance plan on the <code>NextSuggestedMaintenanceDate</code> listed on each maintenance asset, or on the maintenance plan if no assets are included. If a <code>GenerationHorizon</code> is specified, the date of generation is that many days earlier.
DoesGenerateUponCompletion	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If both this option and <code>DoesAutoGenerateWorkOrders</code> are set to true, a new batch of work orders isn't generated until the last work order generated from the maintenance plan is completed. A work order is considered completed when its status falls into one of the following status categories: Cannot Complete, Canceled, Completed, or Closed. If a maintenance plan covers multiple assets, work orders are generated per asset. If a maintenance asset's final work order is completed late, its work order generation is delayed, which may cause a staggered generation schedule between maintenance assets.

Field Name	Details
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The last day the maintenance plan is valid.
Frequency	Type int Properties Create, Filter, Group, Sort, Update Description (Optional) Amount of time between work orders. The unit is specified in the <code>FrequencyType</code> field.
FrequencyType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description (Optional) The unit of frequency: • Days • Weeks • Months • Years For example, to perform monthly maintenance visits you need a work order for each visit, so enter 1 as the <code>Frequency</code> and select Months.
GenerationHorizon	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Moves up the timing of batch generation if <code>DoesAutoGenerateWorkOrders</code> is set to true. A generation horizon of 5 means the new batch of work orders is generated 5 days before the maintenance asset's (or maintenance plan's, if there are no assets) <code>NextSuggestedMaintenanceDate</code>. The generation horizon must be a whole number.
GenerationTimeframe	Type int

Field Name	Details
	Properties Create, Filter, Group, Sort, Update Description (Required) How far in advance work orders are generated in each batch. The unit is specified in the <code>GenerationTimeframeType</code> field.
<code>GenerationTimeframeType</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description (Required) The generation timeframe unit: • Days • Weeks • Months • Years For example, if you need work orders for six months, enter 6 and select Months.
<code>LastReferencedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last interacted with this record, directly or indirectly.
<code>LastViewedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (<code>LastReferencedDate</code>), but not viewed it.
<code>LocationId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Where the service takes place.

Field Name	Details
MaintenancePlanNumber	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description (Read Only) An auto-assigned number that identifies the maintenance plan.
MaintenancePlanTitle	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A name for the maintenance plan.
MaintenanceWindowEndDays	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Days after the suggested service date on the work order that its service appointment can be scheduled.
MaintenanceWindowStartDays	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Days before the suggested service date on the work order that its service appointment can be scheduled. The maintenance window start and end fields affect the Earliest Start Permitted and Due Date fields on the maintenance plan's work orders' service appointments. For example, if you enter 3 for both the maintenance window start and end, the Earliest Start Permitted and the Due Date will be 3 days before and 3 days after, respectively, the Suggested Maintenance Date on each work order. If the maintenance window fields are left blank, the service appointment date fields list their work order's suggested maintenance date.
NextSuggestedMaintenanceDate	Type date Properties Create, Filter, Group, Sort, Update

Field Name	Details
	Description The suggested date of service for the first work order (not the date the work order is created). This corresponds to the work order's <code>SuggestedMaintenanceDate</code>. You can use this field to enforce a delay before the first maintenance visit (for example, if monthly maintenance should begin one year after the purchase date). Its label in the user interface is Date of the first work order in the next batch. For example, if you want the first maintenance visit to take place on May 1, enter May 1. When you generate work orders, the earliest work order will list a suggested maintenance date of May 1, and the dates on the later work orders will be based on the <code>GenerationTimeframe</code> and <code>Frequency</code>.  Important: Maintenance assets also list a <code>NextSuggestedMaintenanceDate</code>, which is initially inherited from the maintenance plan. If the plan has maintenance assets, this date auto-updates on the maintenance assets after each batch is generated, but doesn't update on the maintenance plan itself because batch timing is calculated at the maintenance asset level. If the plan doesn't have maintenance assets, this date auto-updates on the maintenance plan after each batch is generated.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the maintenance plan.
ServiceContractId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The service contract associated with the maintenance plan. The service contract can't be updated if any child maintenance asset is associated with a contract line item from the service contract.
StartDate	Type date Properties Create, Filter, Group, Sort, Update Description The first day the maintenance plan is valid.

Field Name	Details
SvcApptGenerationMethod	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The service appointment generation method. - One service appointment per work order - One service appointment per work order line item If your existing maintenance plans have work orders or work order line items associated with them, you can't change their generation methods. To change pre-existing maintenance plan generation methods, either delete the work orders and regenerate them or delete the maintenance plan and recreate it with the needed generation methods. If Work Order Generation Method is set to One work order per asset, you can't set a Service Appointment Generation Method. If Work Order Generation Method is set to One work order line item per asset, you must select a Service Appointment Generation Method.
WorkOrderGenerationMethod	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The work order generation method. - One work order per asset - One work order line item per asset If your existing maintenance plans have work orders or work order line items associated with them, you can't change their generation methods. To change pre-existing maintenance plan generation methods, either delete the work orders and regenerate them or delete the maintenance plan and recreate it with the needed generation methods. If Work Order Generation Method is left as None, the generation is defaulted to one work order per asset. When One work order line item per asset is set, and all maintenance assets have the same Next Suggested Maintenance Date on the maintenance plan, they are grouped in one work order. However, if maintenance assets have different Next Suggested Maintenance Dates, multiple work orders are created for each date. If Work Order Generation Method is set to One work order per asset, you can't set a Service Appointment Generation Method.

Field Name	Details
WorkOrderGenerationStatus	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description (Read Only) Indicates the status of work order generation: • NotStarted—the default value, work order generation has not started • InProgress—work order generation is underway • Completed—work order generation is complete • Unsuccessful—it was not possible to generate work orders You can generate only one batch at a time.
WorkTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The associated work type. Work orders generated from the maintenance plan inherit its work type's duration, required skills and products, and linked articles. Maintenance assets covered by the plan use the same work type, though you can update them to use a different one.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

MaintenancePlanChangeEvent (API version 48.0)

Change events are available for the object.

MaintenancePlanFeed

Feed tracking is available for the object.

MaintenancePlanHistory

History is available for tracked fields of the object.

MaintenancePlanOwnerSharingRule

Sharing rules are available for the object.

MaintenancePlanShare

Sharing is available for the object.

MaintenanceWorkRule

Represents the recurrence pattern for a maintenance record. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
DoesFloatingWorkOrder	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates that the maintenance plan uses the floating work order adjustment. The default is false.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the line item was last modified. Its label in the user interface is <code>Last Modified Date</code>.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the line item was last viewed.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of this maintenance work rule.
NextSuggestedMaintenanceDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The next date on which this rule will generate maintenance items.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The assigned owner of the maintenance work rule.
ParentMaintenancePlanId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The maintenance plan associated with the maintenance work rule.
ParentMaintenanceRecordId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The maintenance record this work rule applies to.
RecordsetFilterCriteriaId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the recordset filter criteria associated with this maintenance work rule. Available in API version 52.0 and later.
RecurrencePattern	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The RRULE that defines the pattern of recurrence for this work order rule.
SortOrder	Type int

Field	Details
	Properties Create, Filter, Group, Sort, Update Description The sort order that applies to this work order rule.
Title	Type string Properties Create, Filter, Group, Sort, Update Description The title of this work order rule.
Type	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of maintenance work rule. Available values are: - Criteria-based - Calendar-based (default) Available in API version 52.0 and later.
WorkTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the work type that this work order rule generates.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[MaintenanceWorkRuleChangeEvent](#)

Change events are available for the object.

[MaintenanceWorkRuleFeed](#)

Feed tracking is available for the object.

[MaintenanceWorkRuleHistory](#)

History is available for tracked fields of the object.

[MaintenanceWorkRuleOwnerSharingRule](#)

Sharing rules are available for the object.

MaintenanceWorkRuleShare

Sharing is available for the object.

ManagedContent

Represents managed content in a Salesforce CMS workspace for use in an Experience Cloud site or a channel. The ManagedContent object represents the complete instance of a managed content record. It provides a consistent identifier for the managed content so that variants of the content item can be created over time. This object is available in API version 56.0 and later.

Supported Calls

describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve()

Special Access Rules

ManagedContent is available when the Digital Experiences app is enabled.

Fields

Field	Details
ApiName	Type string Properties Filter, Group, Nillable, Sort Description The unique API name of the Salesforce CMS content. Name requirements: • must be 80 characters or fewer • must begin with a letter • can contain only underscores and alphanumeric characters • can't include spaces • can't end with an underscore • can't contain two consecutive underscores This field is available in API version 62.0 and later.
AuthoredManagedContentSpaceId	Type reference Properties Filter, Group, Nillable, Sort Description The Salesforce CMS workspace ID where the content resides. This field is a relationship field.

Field	Details
	Relationship Name AuthoredManagedContentSpace Relationship Type Lookup Refers To ManagedContentSpace
ContentKey	Type string Properties Filter, Group, idLookup, Nillable, Sort Description Unique identifier of the content.
ContentTypeFullyQualifiedName	Type string Properties Filter, Group, Nillable, Sort Description The fully qualified name of the content type of this CMS content. In an enhanced CMS workspace, the <code>ContentTypeFullyQualifiedName</code> for each standard content type is: - News: <code>sfdc_cms__news</code> - Image: <code>sfdc_cms__image</code> - Document: <code>sfdc_cms__document</code> In a CMS workspace, the <code>ContentTypeFullyQualifiedName</code> for each standard content type is: - News: <code>news</code> - Image: <code>cms_image</code> - Document: <code>cms_document</code> In both CMS workspaces and enhanced CMS workspaces, the <code>ContentTypeFullyQualifiedName</code> for a custom content type is the same as the developer name of the custom content type. This field is available in API version 62.0 and later.
Name	Type string Properties Filter, Group, idLookup, Sort

Field	Details
	Description The name of the Salesforce CMS content. When you view this content in a CMS workspace, <code>Name</code> is the title of the latest content version. In an enhanced CMS workspace, <code>Name</code> is the title of the content in the workspace's default language. This field is available in API version 58.0 and later.
<code>PrimaryLanguage</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The default language of the Salesforce CMS workspace where the content resides.

Usage

When you create or add content in a Salesforce CMS workspace, the content is uniquely identified by the Salesforce CMS workspace, a content key, and a default language. `ManagedContent` can be queried through the public sObject API. Use this object to create and retrieve information for a specific managed content.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ManagedContentChangeEvent](#) on page 68 (API version 62.0)

Change events are available for the object.

ManagedContentChannel

Represents the details of a CMS channel. CMS channels correspond to managed content publishing endpoints. They deliver published content from your Salesforce CMS workspaces to an audience. This object is available in API version 55.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

`ManagedContentChannel` is available when the Digital Experiences app is enabled.

Fields

Field	Details
CacheControlMaxAge	Type long Properties Filter, Group, Nillable, Sort Description The amount of time, in seconds, it takes for a requested CMS content resource in the CMS channel to expire before a new request for the resource must be made.
Domain	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The domain for a public channel. Only public channels can have an assigned domain. Possible value is: • mydomain.cdn.salesforce-experience.com  Note: The mydomain value is specific to the domain of the channel.
DomainHostName	Type string Properties Filter, Nillable, Sort Description The hostname of the domain assigned to the CMS channel. Only public channels can have an assigned domain.
MediaCacheControlMaxAge	Type long Properties Filter, Group, Nillable, Sort Description The amount of time, in seconds, it takes for a requested CMS image or document content resource in the CMS channel to expire before a new request for the resource must be made. This field is available in API version 57.0 and later.
Name	Type string

Field	Details
	Properties Filter, Group, idLookup, Sort Description Name of the CMS channel.
OptionsIsCacheControlPublic	Type boolean Properties Filter Description When <code>true</code> , the CMS channel connection type is public. When <code>false</code> , the cache control is private. The default value is <code>false</code> .
OptionsIsDomainLocked	Type boolean Properties Filter Description When <code>true</code> , the domain set to the channel can't be changed. Only public channels can have this field set to <code>true</code> . If the channel type is <code>COMMUNITY</code> , the default value is <code>true</code> . For all other channel types, the default value is <code>false</code> .
OptionsIsSearchable	Type boolean Properties Filter Description When <code>true</code> , users can search for all published CMS content types within the channel. The default value is <code>false</code> .
Type	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The connection type of the CMS channel. The connection type determines which audience can access the CMS content delivered in the channel. Possible values are: • <code>COMMUNITY</code>: User access is controlled by the settings of the Experience Cloud site. • <code>CloudToCloud</code>: Connects Salesforce CMS to the B2C Commerce Page Designer. • <code>ConnectedApp</code>: User access to the channel is controlled by the connected application associated with the channel.

Field	Details
	• PublicUnauthenticated: No user authentication required, content can be cached on public CDNs. • Record: User access to the content is controlled by the user access to the associated record. Content is only accessible to users with access to the record. • UserPermission: This value is reserved for future use.

Usage

`ManagedContentChannel` can be queried through the public sObject API. Use this object to retrieve information for a specific CMS channel.

ManagedContentInfo

Allows the creation of relationship to Product using ProductMedia. This object is available in API version 49.0 to 57.0. In API version 58.0 and later, use the ManagedContent object.

Supported Calls

`describeSObjects()`

Special Access Rules

You must have the B2B Commerce license and a CMS workspace to access a web store.

Usage

The CMS content import process returns a ManagedContentInfo ID for each piece of content. The ManagedContentInfo entity has a 1:1 relationship with ProductMedia. To create this relationship, ProductMedia must be associated with a Product entity, for example, Product > ProductMedia > ManagedContentInfo. Use the ID to associate content uploaded through the API with the ProductMedia entity

ManagedContentSpace

Represents the complete instance of a Salesforce CMS workspace that stores managed content. Users and groups with designated permissions can access and manage the content in a CMS workspace. This object is available in API version 56.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

ManagedContentSpace is available when the Digital Experiences app is enabled.

Fields

Field	Details
ApiName	Type string Properties Filter, Group, Nillable, Sort Description The unique API name of an enhanced Salesforce CMS workspace. Name requirements: • must be 40 characters or fewer • must begin with a letter • can contain only underscores and alphanumeric characters • can't include spaces • can't end with an underscore • can't contain two consecutive underscores
DefaultLanguage	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Default language for the Salesforce CMS workspace. Possible values are: • da—Danish • de—German • en_US—English • es—Spanish • es_MX—Spanish (Mexico) • fi—Finnish • fr—French • it—Italian • ja—Japanese • ko—Korean • nl_NL—Dutch • no—Norwegian • pt_BR—Portuguese (Brazil) • ru—Russian • sv—Swedish • th—Thai • zh_CN—Chinese (Simplified)

Field	Details
	zh_TW—Chinese (Traditional)
Description	Type textarea Properties Filter, Group, Nillable, Sort Description Description of the Salesforce CMS workspace.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
Name	Type string Properties Filter, Group, idLookup, Sort Description Name of the Salesforce CMS workspace.

ManagedContentVariant

Represents a variant of a managed content item. This object is available in API version 56.0 and later.

Managed content variants are associated with a `ManagedContent` object. The managed content and variants are counted as one content record in your Salesforce org.

For example, say you have a managed content item of content type `News` and a default language of English. When you translate the `News` content into other languages such as Spanish, Japanese, and French, a managed content variant for each language is created.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Special Access Rules

`ManagedContentVariant` is available when the Digital Experiences app is enabled.

Fields

Field	Details
<code>ContentTypeFullyQualifiedName</code>	Type string Properties Filter, Group, Nillable, Sort Description The fully qualified name of the content type of this CMS content. In an enhanced CMS workspace, the <code>ContentTypeFullyQualifiedName</code> for each standard content type is: • News: <code>sfdc_cms__news</code> • Image: <code>sfdc_cms__image</code> • Document: <code>sfdc_cms__document</code> The <code>ContentTypeFullyQualifiedName</code> for a custom content type is the same as the developer name of the custom content type. This field is available in API version 62.0 and later.
<code>IsPublished</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the managed content variant is published to a channel. The default value is <code>false</code>. This field is calculated.
<code>Language</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Language of the variant.

Field	Details
ManagedContentId	Type reference Properties Filter, Group, Sort Description Globally unique identifier for the managed content item. This field is a relationship field. Relationship Name ManagedContent Relationship Type Lookup Refers To ManagedContent
ManagedContentKey	Type string Properties Filter, Group, idLookup, Sort Description Globally unique identifier for managed content that associates with the managed content variant.
ManagedContentVariantStatus	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Publication status of the managed content. Possible values are: • Draft • Published • Revised
Name	Type string Properties Filter, Group, idLookup, Sort Description Name of the managed content variant.

Field	Details
UrlName	Type string Properties Filter, Group, Nillable, Sort Description URL name of the managed content variant.
VariantType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Type of variant. Possible value is: • Content

Usage

Managed content variants are associated with a `ManagedContent` object. The managed content and managed content variants are counted as one content record in your Salesforce org.

`ManagedContentVariant` can be queried through the public `sObject` API. Use this object to retrieve information for a specific content in a certain language and format of a managed content.

MarketingForm

Represents an Account Engagement marketing form that has been synched to Salesforce. Use forms on your website and landing pages to collect information about visitors and turn anonymous visitors into identified prospects. This object is available in API version 42.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Special Access Rules

To access this object, your org must use Account Engagement and users need the CRM User or Sales User permission set.

Fields

Field Name	Details
CampaignId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the related campaign.
ErrorRate	Type percent Properties Filter, Nillable, Sort Description The percentage of views that led to an error.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp that indicates when the current user last viewed a record that is related to this form.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the current user last viewed this record. If this value is null, this record might only have been referenced (see <code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Filter, Group, Sort Description The name of the marketing form.

Field Name	Details
SubmissionRate	Type percent Properties Filter, Nillable, Sort Description The percentage of the views that led to a form submission.
TotalErrors	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The total number of times a form error prevented a submission.
TotalSubmissions	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The total number of times the form was successfully submitted.
TotalTrackedLinkClicks	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The total number of link clicks from your thank you page.
TotalViews	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The total number of times your form has been viewed. Includes multiple views from the same visitor.
Type	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort

Field Name	Details
	Description Specifies the type of marketing form record, either a form or form handler.
UniqueErrors	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The number of errors generated by separate visitors.
UniqueSubmissions	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The total number of unique submissions. Removes multiple submissions from the same prospect.
UniqueTrackedLinkClicks	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The total number of unique link clicks from your thank you page. Removes multiple clicks from the same prospect.
UniqueViews	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The number of form views by separate visitors.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

MarketingFormEvent (API version 44.0)

Change events are available for the object.

MarketingFormFeed

Feed tracking is available for the object.

MarketingLink

Represents an Account Engagement marketing link record, either a custom redirect or a file, that has been synced to Salesforce. This object is available in API version 42.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Special Access Rules

To access this object, your org must use Account Engagement and users need the CRM User or Sales User permission set.

Fields

Field Name	Details
CampaignId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the related campaign.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp that indicates when the current user last viewed a record that is related to this marketing link.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the current user last viewed this record. If this value is null, this record might only have been referenced (see <code>LastReferencedDate</code>) and not viewed.

Field Name	Details
Name	Type string Properties Filter, Group, Sort Description The name of the marketing link.
TargetUrl	Type url Properties Filter, Group, Sort Description The target URL of the marketing link.
TotalTrackedLinkClicks	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The total number of clicks for the redirect. Includes clicks from visitors and identified prospects. When a person clicks the link multiple times, each click is counted in this number.
Type	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Specifies the type of marketing link record, either a custom redirect or file.
UniqueTrackedLinkClicks	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The number of unique clicks for the redirect. Includes clicks from visitors and identified prospects. Only the first click is counted in this number.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

MarketingFormEvent (API version 44.0)

Change events are available for the object.

MarketingLinkFeed

Feed tracking is available for the object.

MatchingRule

Represents a matching rule that is used to identify duplicate records. This object is available in API version 33.0 and later.

A matching rule compares field values to determine whether a record is similar enough to existing records to be considered a duplicate. For example, a matching rule can specify that if the `Email` and `Phone` values of two records match exactly, the records are possible duplicates. Your organization uses matching rules with duplicate rules to define what happens when duplicates are identified.

If the rule is for a Person Account, `SubjectSubType` is automatically set to `PersonAccount`.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

As of Summer '20 and later, only users with the View Setup and Configuration permission can access this object.

Fields

Field Name	Details
<code>BooleanFilter</code>	Type string Properties Filter, Group, Nillable, Sort Description Specifies filter logic conditions.
<code>Description</code>	Type textarea Properties Filter, Group, Nillable, Sort Description The description of the matching rule.

Field Name	Details
DeveloperName	Type string Properties Filter, Group, Sort Description The developer name for the matching rule.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language selected for your organization.
MasterLabel	Type string Properties Filter, Group, Sort Description The name of the matching rule.
MatchEngine	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The match engine used by the matching rule.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix for matching rules for your organization.
RuleStatus	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort

Field Name	Details
	Description Required. The activation status of the matching rule. Values are: • <i>Inactive</i> • <i>Deactivating</i> • <i>DeactivationFailed</i> • <i>Active</i> • <i>Activating</i> • <i>ActivationFailed</i>  Important: The only valid values you can declare when deploying a package are <i>Active</i> and <i>Inactive</i>.
SubjectSubtype	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Read-only. Indicates if the matching rule is defined for the <code>Person</code> subtype of <code>Account</code>. Valid values are: • <code>PersonAccount</code> • <code>None</code> If the rule is for a Person Account, <code>SubjectSubType</code> is automatically set to <code>PersonAccount</code>.
SubjectType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The object for the matching rule.

Usage

Use the Salesforce API to retrieve and view details about `MatchingRule` and `MatchingRuleItem`. Use the Salesforce Metadata API to create, update, or delete these objects.

SEE ALSO:

[MatchingRuleItem](#)

[DuplicateRule](#)

[MatchingRule in the Salesforce Metadata API Developer's Guide](#)

MatchingRuleItem

Represents criteria used by a matching rule to identify duplicate records. This object is available in API version 33.0 and later.

A matching rule item determines which field the matching rule uses to identify a duplicate record. It also determines the method used to compare value that two records have for the field. For example, a matching rule item might specify that the `Email` field values of two records must match exactly in order for the records to be considered duplicates.

When a matching rule has multiple matching rule items, it means that multiple fields must match in order for the records to be identified as duplicates.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

As of Summer '20 and later, only users with the View Setup and Configuration permission can access this object.

Fields

Field Name	Details
<code>BlankValueBehavior</code>	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Specifies how blank fields affect whether the fields being compared are considered matches. Valid values are: <code>MatchBlanks</code> <code>NullNotAllowed</code> (default)
<code>Field</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates which field to compare when determining if a record is similar enough to an existing record to be considered a match.
<code>MatchingMethod</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field Name	Details
	Description Defines how the fields are compared. Choose between the exact matching method and various fuzzy matching methods. Valid values are: • <i>Exact</i> • <i>FirstName</i> • <i>LastName</i> • <i>CompanyName</i> • <i>Phone</i> • <i>City</i> • <i>Street</i> • <i>Zip</i> • <i>Title</i> For details on each matching method, see “Matching Methods Used with Matching Rules” in the Salesforce Help.
MatchingRuleId	Type reference Properties Filter, Group, Sort Description The ID for the matching rule. This is a relationship field. Relationship Name MatchingRule Relationship Type Lookup Refers To MatchingRule
SortOrder	Type int Properties Filter, Group, Sort Description The order of the matching rule items for a matching rule.

Usage

Use the Salesforce SOAP API to retrieve and view details about MatchingRule and MatchingRuleItem. Use the Salesforce Metadata API to create, update, or delete these objects.

SEE ALSO:

[MatchingRule](#)

[DuplicateRule](#)

[MatchingRule in the Salesforce Metadata API Developer's Guide](#)

MerchAccPaymentMethodSet

Defines an ordered list of payment methods that are available to a merchant's customer during checkout. You can configure multiple payment method sets, each designated for a specific locale, payment region, or sale channel. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access Salesforce Payments objects, you must have a Salesforce Payments license with the Payments permission enabled for your org. Salesforce Payments entities are available only in Lightning Experience.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for organizations with the multicurrency feature enabled. The ISO code for any currency allowed by the organization.
DeveloperName	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description Unique name for the object given by the Payments admin.

Field	Details
MerchantAccountId	Type reference Properties Create, Filter, Group, Sort Description Foreign key to the MerchantAccount. This field is a relationship field. Relationship Name MerchantAccount Relationship Type Lookup Refers To MerchantAccount
PaymentMethodSetNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Auto-assigned ID for the MerchAccPaymentMethodSet.
PaymentMethodSummary	Type string Properties Filter, Group, Nillable, Sort Description Summary field that is automatically populated with comma-separated values from MerchAccPaymentMethodType. This field is a calculated field.

MerchAccPaymentMethodType

Refers to a payment method that is in a payment method set, which is defined by the MerchAccPaymentMethodSet object. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access Salesforce Payments objects, you must have a Salesforce Payments license with the Payments permission enabled for your org. Salesforce Payments entities are available only in Lightning Experience.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only when the multicurrency feature is enabled. Contains the ISO code for any currency used by the org.
PaymentInstrumentType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of instrument the payer can pay with. Possible values are: • us_bank_account - ACH_Debit • affirm - Affirm • afterpay - Afterpay • afterpay_clearpay - Afterpay/Clearpay • amazon_pay - Amazon Pay • applepay - Apple Pay • au_becs_debit - BECS_Debit • bacs_debit - BACS_Debit • bancontact - Bancontact • card - Credit Cards • cashapp - Cash App • clearpay - Clearpay • eps - EPS • googlepay - Google Pay • ideal - iDEAL • klarna - Klarna • link - Link • paypal - PayPal

Field	Details
	• <code>sepa_debit</code> - SEPA Debit • <code>venmo</code> - Venmo • <code>wechat_pay</code> - WeChat Pay
<code>PaymentMethodSetId</code>	Type reference Properties Create, Filter, Group, Sort Description ID of the <code>MerchAccPaymentMethodSet</code>. This field is a relationship field. Relationship Name <code>PaymentMethodSet</code> Relationship Type Lookup Refers To <code>MerchAccPaymentMethodSet</code>
<code>PaymentMethodSetTypeNumber</code>	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Auto-assigned ID for the <code>MerchAccPaymentMethodSet</code>.
<code>SortOrder</code>	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Sort order for the <code>MechAccPaymentMethodType</code> within the <code>MerchAccPaymentMethodSetExperience</code>.

Associated Objects

This object has these associated object. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[MerchAccPaymentMethodTypeHistory](#) on page 63

History is available for tracked fields of the object.

MerchantAccount

A type of bank account that lets a merchant accept payments from a variety of payment methods, including credit or debit cards, or digital wallets. A Salesforce Payments merchant account is linked to an underlying payment gateway to process payments. This object is available in API version 56.0 and later.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access Salesforce Payments objects, you must have a Salesforce Payments license and Payments must be enabled for your org. Salesforce Payments objects are available only in Lightning Experience.

Fields

Field	Details
AccountDescription	Type textarea Properties Create, Nillable, Update Description Information about the merchant account.
CountryIsoCode	Type string Properties Create, Filter, Group, Sort, Update Description Country where the legal entity representing the account is.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Contains the ISO code for any currency allowed by the organization. Available only for organizations with multi-currency enabled.
LastReferencedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user can have accessed this record or list view but not viewed it.
Mode	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The operational mode of the merchant account. This field determines the account's ability to accept payments. For production, the account must be in Live mode. Possible values are: • Connected— Merchant account is active but it can't accept payments. This option is only valid in production orgs. • Live— Merchant account is active and can accept payments. This option is only valid in production orgs. • Test —Merchant account is active but not able to accept payments. This option is only valid in sandbox orgs, and the account can accept only test transactions.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the merchant account.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Name of the individual or group assigned to the merchant account.

Field	Details
	This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PaymentStatus	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Merchant account is active and can accept payments. Possible values are: • Disabled • Enabled The default value is Disabled.
PayoutStatus	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Money can be moved from the payment provider account to the designated merchant account. Possible values are: • Disabled • Enabled The default value is Disabled.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Indicates the state of the merchant account. Possible values are: • Active - The merchant account can accept payments.

Field	Details
	• Complete - <code>PaymentStatus</code> and <code>DepositStatus</code> are enabled and all the required information is provided. • Enabled - <code>PaymentStatus</code> and <code>PayoutStatus</code> are enabled, but the payment provider requires more information later. If the merchant doesn't provide the information, then the account becomes restricted. The time limit that the merchant has to provide the information is longer than the <code>RestrictedSoon</code> state. • Pending - The merchant account exists but it can't accept payments. This option maintains backward compatibility for accounts that were created with API version 55.0 and earlier. • Rejected - The account is rejected and an explanation is provided. • Restricted - <code>PaymentStatus</code>, <code>PayoutStatus</code>, or both are disabled, so the merchant account's operation is limited. • Restricted Soon - <code>PaymentStatus</code> and <code>PayoutStatus</code> are enabled, but the payment provider requires more information. If the merchant doesn't provide the information in a specific time period, then the account becomes restricted.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

MerchantAccountChangeEvent (API version 62.0)

Change events are available for the object.

MerchantAccountFeed

Feed tracking is available for the object.

MerchantAccountHistory

History is available for tracked fields of the object.

MerchantAccountOwnerSharingRule

Sharing rules are available for the object.

MerchantAccountShare

Sharing is available for the object.

MerchantAccountEvent

Represents a merchant account platform event. Subscribe to these events so you can listen and respond to them when they're published. For example, create a Salesforce Flow that is triggered when one of these events is published. This object is available in API version 59.0 and later.

For more information about platform events, see the [Platform Events Developer Guide](#).

Supported Calls

`describeSObjects()`

Special Access Rules

To access Salesforce Payments objects, you must have a Salesforce Payments license and Payments must be enabled for your org. Salesforce Payments objects are available only in Lightning Experience.

Fields

Field	Details
ChangeType	Type picklist Properties Restricted picklist Description Type of merchant account event, which triggers an event notification. You can write code to listen to operate conditionally on the value of this field. For example, you can ignore a create change but get notified of updates. Possible values are: • Create—Merchant account is created. • Disable—The account is deactivated. For example, the payment provider or the merchant disables an account due to fraudulent activity. • PaymentEnable—The account is active and ready to receive payments. • PayoutEnable—The account is ready to receive payouts. • Update—Merchant account property change occurs.
MerchantAccountId	Type reference Properties Nillable Description Identifies the merchant account for which the event occurs. This field is a relationship field. Relationship Name MerchantAccount Relationship Type Lookup Refers To MerchantAccount

MessagingChannel

Represents a communication channel that an end user can use to send a message to an agent. A communication channel can be an SMS number, a Facebook page, or another supported messaging channel. This object is available in API version 40.0 and later.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Fields

Field Name	Details
<code>BusinessHoursId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The operating hours for your business, when agents are available. Available only in orgs that use Einstein Bots. This is a relationship field. Relationship Name BusinessHours Relationship Type Lookup Refers To BusinessHours
<code>ChannelAddressIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description A UUID that identifies a deployed messaging channel. This identifier is unique across orgs, so a channel with the same <code>MessagingPlatformKey</code> in a sandbox and production will have a different <code>ChannelAddressIdentifier</code> for each. Available in API version 59.0 and later.
<code>ChannelDefinitionId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The associated conversation channel definition, which is used only in Bring Your Own Channel for Messaging and Bring Your Own Channel for CCaaS. Available in API version 58.0 and later. This field is a relationship field. Relationship Name ChannelDefinition Refers To ConversationChannelDefinition
ConsentType	Type picklist Properties Create, defaultedOnCreate, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of consent, or opt-in, that is required to message users on this channel. This field is available in API version 48.0 and later. Possible values are: • DoubleOptIn • ExplicitOptIn • ImplicitOptIn (default value) The property <code>defaultedOnCreate</code> has been removed in API version 51.0 and later. Now the consent type is defaulted to <code>ImplicitOptIn</code> when the consent type isn't set on create only for channels that support consents.
ConversationEndResponse	Type textarea Properties Create, Nillable, Update Description Automated response to the customer when the agent ends the conversation. (Optional)
CriticalWaitTime	Description Reserved for future use. This field has been deprecated as of API version 52.0.
Description	Description Reserved for future use.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update

Field Name	Details
	Description The developer name for the messaging channel. This value is a concatenation of the messaging platform key and the message type.
DoubleOptInPrompt	Type textarea Properties Create, Nillable, Update Description Automated response to the end user to prompt them to doubly opt in to receiving messages. Available in API version 48.0 and later.
EngagedResponse	Type textarea Properties Create, Nillable, Update Description Automated response to the customer when the conversation is accepted by the agent. (Optional)
InitialResponse	Type textarea Properties Create, Nillable, Update Description First automated response to the customer for a new conversation. (Optional)
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether a channel is active and can receive messages.
IsAuthenticated	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether a user is authenticated to a voice assistant. The org permission Live Message Voice is required to access and update this field. Available in API version 44.0 and later.

Field Name	Details
IsoCountryCode	Type string Properties Create, Filter, Group, Nillable, Sort Description Two-letter ISO 3166-1 alpha-2 code for the country that the phone number is associated with. For example, the code for United States is <code>US</code>. Available in API version 44.0 and later.
IsRequireDoubleOptIn	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether double opt-in is required (<code>true</code>) or not (<code>false</code>) for this Messaging channel. Available in API version 48.0 and later.
IsRestrictedToBusinessHours	Description Reserved for future use.
IsUserMatchByExternalIdOnly	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether to restrict matching on customer by external ID only (and not use the full name). This field has been deprecated as of API version 52.0.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Reserved for future use.
MasterLabel	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Unique name for the <code>MessagingChannel</code>.

Field Name	Details
MessageType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Type of message. Possible values are: • AppleBusinessChat—Represents Apple Messages for Business. • Custom—Represents Bring Your Own Channel for Messaging or Bring Your Own Channel for CCaaS. Available in API version 58.0 and later. • EmbeddedMessaging—Represents Enhanced Chat. Available in API version 50.0 and later. • Facebook • Phone • PSTNVoice—Represents an Agentforce Voice channel that uses PSTN. Available in API version 65.0 and later. • Text • Voice • WhatsApp
MessagingPlatformKey	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Unique key for a channel that the end user can message or call based on the MessageType. • In PSTNVoice, SMS, WhatsApp, and LINE channels, the platform key is the phone number associated with this channel. • In Facebook Messenger channels, the platform key is the Facebook page ID associated with this channel. • In Apple Messages for Business channels, the platform key is the Apple Messages identifier. • In Enhanced Chat, the platform key is identical to the Channel Address Identifier.
OfflineAgentsResponse	Description Reserved for future use.
OptInPrompt	Type textarea

Field Name	Details
	Properties Create, Nillable, Update Description Automated response to the end user to prompt them to explicitly opt in to receiving messages. Available in API version 49.0 and earlier.
OptInResponse	Type textarea Properties Create, Defaulted on create, Nillable, Update Description Automated response to the end user when they opt in to messaging. Available in API versions 48.0 and 49.0. Use the <code>OptInConfirmation</code> field of the MsgChannelLanguageKeyword on page 3497 object instead.
OptionsIdentifyEndUserLanguage	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Auto-populates the Language field for this channel's messaging users if their locale is known. Supported for Enhanced Chat and Apple Messages for Business only.
OptOutResponse	Type textarea Properties Create, Defaulted on create, Nillable, Update Description Automated response to the end user when they opt out of messaging. Available in API version 48.0 only. Use the <code>OptOutConfirmation</code> field of the MsgChannelLanguageKeyword object instead.
OutsideBusinessHoursResponse	Description Reserved for future use.
PlatformType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort

Field Name	Details
	Description Indicates whether the channel is <code>Standard</code> or <code>Enhanced</code>. When a standard SMS or Facebook Messenger channel is upgraded, the <code>PlatformType</code> changes from <code>Standard</code> to <code>Enhanced</code>. When a standard WhatsApp channel is upgraded, the original channel's <code>PlatformType</code> remains <code>Standard</code> and a new channel is created with a <code>PlatformType</code> of <code>Enhanced</code>. Enhanced Chat channels have a <code>PlatformType</code> of <code>Enhanced</code>.
<code>RoutingConfigurationId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Specifies which Omni-Channel routing configuration to use. This field is required when <code>RoutingType</code> is <code>OmniSkills</code>. To learn more, see Create Routing Configurations.
<code>RoutingType</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Type used to support Omni-Channel's different routing methods. • <code>OmniQueue</code> (queue-based routing) • <code>OmniSkills</code> (skills-based routing) When this value isn't set, <code>OmniQueue</code> is used.
<code>SessionHandler</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The queue or Omni-Channel flow that the channel's messaging sessions are routed to. Available in API version 51.0 and later.
<code>TargetQueueId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description Queue in which incoming conversations are placed while waiting for an agent to accept. This is a relationship field. Relationship Name TargetQueue Relationship Type Lookup Refers To Group
TargetUserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Messaging User or agent for the conversation. Available in API version 50.0 and earlier.

Usage

While third-party messaging channels can be created via Apex, we recommend creating channels via the Messaging Settings page in Setup. Channels created via Apex may not work and can't be deleted.

In enhanced WhatsApp, Facebook Messenger, Apple Messages for Business, and LINE channels, the flow of a channel's messaging traffic is controlled by an associated MessagingChannelUsage record. The MessagingChannelUsage determines whether the channel is active or deactivated.

MessagingChannelSkill

Junction object that represents an association between MessagingChannel and Skill. This object is available in API version 45.0 and later.

For example, when we want to use Omni-Channel skills-based routing in Live message, this object maintains the mapping between the messaging channel and the skill.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
MessagingChannelId	Type reference Properties Create, Filter, Group, Sort Description ID of the MessagingChannel on page 3411. This is a relationship field. Relationship Name MessagingChannel Relationship Type Lookup Refers To MessagingChannel
SkillId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the Skill on page 5073. This is a relationship field. Relationship Name Skill Relationship Type Lookup Refers To Skill

MessagingChannelUsage

Represents the status of an enhanced Messaging channel or of an application in a Unified Messaging channel. This object is available in API version 60.0 and later.

A MessagingChannel can be associated with up to three MessagingChannelUsage records, each with a unique DeploymentType. The role of a MessagingChannelUsage record differs slightly depending on whether it's used in an enhanced Messaging channel or a Unified Messaging channel.

- In enhanced WhatsApp, Facebook Messenger, Apple Messages for Business, and LINE channels, each channel has one associated MessagingChannelUsage record with a DeploymentType of `Conversation`. The MessagingChannelUsage record determines the channel's flow of messaging traffic. When you activate such a channel in Setup, its MessagingChannelUsage record updates to

use a `DeploymentStatus` of `Active`, and messaging traffic can flow to and from Salesforce. Similarly, deactivating the channel in Setup causes its `MessagingChannelUsage` record to update to a `DeploymentStatus` of `Disabled`, and stops the flow of messaging traffic.

- In Unified Messaging channels, the `MessagingChannelUsage` record represents the status of a connected Service Cloud or Marketing Cloud application. For example, if a WhatsApp Unified Messaging channel is connected to both Service Cloud and Marketing Cloud, the `MessagingChannel` record has two associated `MessagingChannelUsage` records with a `DeploymentType` of `Conversation` and `MJ`, respectively. These `MessagingChannelUsage` records are created when a user selects the Marketing or Service application during Unified Messaging setup.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
<code>ConsentType</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The level of customer consent required for your business to message a customer on this channel. Customers can opt out at any time. Possible values are: • <code>Implicit Opt-In</code>: By sending an initial message to your business, the customer agrees to receive messages. • <code>Explicit Opt-In</code>: The customer uses keywords to actively opt into receiving messages. • <code>Double Opt-In</code>: The customer uses keywords to opt in twice to receiving messages.
<code>DeploymentStatus</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The status of the connected channel or application. If the <code>DeploymentStatus</code> is <code>Active</code>, messages can be sent or received (if permitted). Possible values are: • <code>New</code>—Admin selected the Marketing or Service application in Unified Messaging Setup, or created a new enhanced WhatsApp, Facebook Messenger, Apple Messages for Business, or LINE channel on the Messaging Settings page in Setup. • <code>Provisioning</code>—Admin clicked Connect on an application in Unified Messaging Setup, or Activate on an enhanced Messaging channel.

Field	Details
	• Active—Provisioning was successful and the channel can be used to message with customers via the connected application or channel. • Error—Provisioning or deprovisioning wasn't successful. The admin can retry. • Deprovisioning—Admin clicked Disconnect on an application in Unified Messaging Setup, or Deactivate on an enhanced Messaging channel. • Disabled—Deprovisioning was successful and the channel or application can no longer be used to message with customers.
DeploymentType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Indicates whether the record is related to Service Cloud or Marketing Cloud. Possible values are: • Conversation—Relating to Service Cloud. • MessagingEngagement—Relating to Marketing Cloud. • MJ—Relating to Marketing Cloud. J stands for Journey Builder.
DisabledTime	Type dateTime Properties Filter, Nillable, Sort Description The time the MessagingChannelUsage record entered the Disabled state after an admin clicked Disconnect or Deactivate on the application or channel. When the record is disabled, all inbound and outbound messages aren't sent via the connected application. Any sessions with a status other than Ended or Error are automatically ended within 48 hours unless the MessagingChannelUsage record is reenabled.
ErrorReason	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description If an error occurs during connection, activation, disconnection, or deactivation of a MessagingChannelUsage record, the ErrorReason provides more information about what went wrong. For example, if an associated Service Cloud application for a Unified Messaging channel is missing a fallback queue or consent keywords, the connection attempt fails with an ErrorReason of ProvisioningError. Possible values are:

Field	Details
	• DeprovisioningError • InternalError • InvalidSelection • ProvisioningError
MessagingChannelId	Type reference Properties Create, Filter, Group, Sort Description The enhanced Messaging channel or Unified Messaging channel that the MessagingChannelUsage record is associated with. A MessagingChannel can be associated with up to three MessagingChannelUsage records. This field is a relationship field. Relationship Name MessagingChannel Relationship Type Lookup Refers To MessagingChannel
RoutingOverride	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Applicable only to MessagingChannelUsage records with a deployment type of MJ (Marketing Cloud). RoutingOverride indicates how messages are delivered in a unified channel where both the Service and Marketing applications are connected. Possible values are: • MJKeywordsOnly—If a messaging user sends a marketing keyword that is defined in Journey Builder, Journey Builder handles the message delivery and response. If a messaging user sends a non-keyword message, Omni-Channel handles the message delivery and response. • NonSessionMessages—If a messaging user is engaged in an active Service Cloud messaging session, Service Cloud handles message delivery and response. If the user isn't engaged in an active session, Journey Builder handles message delivery and response. Regardless of the RoutingOverride value, outbound messages are always handled by Service Cloud if the messaging user is engaged in an active Service Cloud messaging session. A session is considered active if its status isn't Ended or Error.

MessagingConfiguration

Represents the details for a Messaging configuration. This object is available in API version 47.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
DeveloperName	Type string Properties Filter, Group, Sort Description The API name for this Messaging configuration.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language of this Messaging configuration.
MasterLabel	Type string Properties Filter, Group, Sort Description The label for the Messaging configuration.
MessagingServiceUrl	Type string Properties Filter, Group, Nillable, Sort Description The URL for the Messaging service.

Field	Details
ProvisioningServiceUrl	Type string Properties Filter, Group, Nillable, Sort Description The URL for the provisioning service.

MessagingDeliveryError

Represents a log of triggered outbound failures to verify when a triggered outbound has failed. This object is available in API version 44.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
CreatedById	Type reference Properties Defaulted on createFilter, Group, Sort Description ID of the user who created the error.
CreatedDate	Type dateTime Properties Defaulted on create, Filter, Sort Description Date the error was created.
DestinationPhoneNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The recipient of the phone call.
FailureReason	Type textarea Properties Create, Nillable, Update Description The provided reason for why the message failed.
FlowEntity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The entity that triggered the flow to send the message.
FullMessage	Type textarea Description Plain error text.
Id	Type id Properties Defaulted on create, Filter, Group, idLookup, Sort Description Identifier of the error.
IsDeleted	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the error has been deleted.
LastModifiedById	Type reference Properties Defaulted on create, Filter, Group, Sort Description The ID of the user who last modified the error log.

Field	Details
LastModifiedDate	Type dateTime Properties Defaulted on create, Filter, Sort Description Date when the Messaging error log was last modified.
MessagingChannelId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the MessagingChannel on page 3411. This is a relationship field. Relationship Name MessagingChannel Relationship Type Lookup Refers To MessagingChannel
MessagingEndUserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Identifier for the Messaging user. This is a relationship field. Relationship Name MessagingEndUser Relationship Type Lookup Refers To MessagingEndUser
MessagingTemplateId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the Messaging template used.

Field	Details
	This is a relationship field. Relationship Name MessagingTemplate Relationship Type Lookup Refers To MessagingTemplate
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Namefield, Sort Description Name of the error. Maximum length is 80 characters.
SystemModstamp	Type dateTime Properties Defaulted on create, Filter, Sort Description System modification time for the Messaging delivery error log.
Type	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The kind of event that occurred. Possible values include: • Error (Default) • Warning

MessagingEndUser

Represents a single address—such as a phone number or Facebook page—communicating with a single Messaging channel. This object is available in API version 40.0 and later.



Note: This object is available for Einstein Conversation Insights customers whose data is stored natively on the Salesforce Platform. If you turned on Einstein Conversation Insights for the first time starting in Spring '26, this object is available to query and access using Salesforce tools. For existing ECI customers, data migration and access to related Salesforce Platform objects is scheduled to begin in Summer '26.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the Account associated with this Messaging end user. Available in API version 43.0 and later. This field is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
ContactId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the associated Contact. Available in API version 43.0 and later. This field is a relationship field. Relationship Name Contact Relationship Type Lookup Refers To Contact
HasInitialResponseSent	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Indicates whether an initial response has been sent to the Messaging end user (<code>true</code>) or not (<code>false</code>).
<code>IsFullyOptedIn</code>	Type boolean Properties Defaulted on create, Filter, Sort Description Indicates whether the Messaging end user has opted in to receiving messages (<code>true</code>) or not (<code>false</code>). This field compares the related messaging channel's consent requirement to the user's consent status; if the user's status meets the channel's required consent level, <code>IsFullyOptedIn</code> is set to <code>true</code> . Available in API version 48.0 and later.
<code>IsOptedOut</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the Messaging end user has opted out of receiving messages. Available in API version 48.0 and earlier. Use <code>MessagingConsentStatus</code> and <code>IsFullyOptedIn</code> instead.
<code>IsoCountryCode</code>	Type string Properties Create, Filter, Group, Nillable, Sort Description The ISO country code associated with the Messaging end user.
<code>LastReferencedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
<code>LastViewedDate</code>	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
LeadId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the associated lead. Available in API version 57.0 and later. This field is a relationship field. Relationship Name Lead Relationship Type Lookup Refers To Lead
Locale	Type string Properties Create, Filter, Group, Nillable, Sort Description Reserved for future use.
Language	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The preferred language of the messaging user who participated in the messaging session. Supported for Messaging for In-App and Web and Apple Messages for Business only.
MessageType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Type of message. Possible values are: - AppleBusinessChat—Represents Apple Messages for Business. - Custom—Represents Bring Your Own Channel. Available in API version 58.0 and later.

Field	Details
	• EmbeddedMessaging—Represents Messaging for In-App and Web. Available in API version 50.0 and later. • Facebook • Phone • Text • Voice • WhatsApp
MessagingChannelId	Type reference Properties Create, Filter, Group, Sort Description The ID of the Messaging channel associated with the Messaging end user. This is a relationship field. Relationship Name MessagingChannel Relationship Type Lookup Refers To MessagingChannel
MessagingConsentStatus	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The consent status of the messaging user. This field is available in API version 48.0 and later. Possible values are: • DoublyOptedIn • ExplicitlyOptedIn • ImplicitlyOptedIn • OptedOut
MessagingPlatformKey	Type string Properties Create, Filter, Group, Sort

Field	Details
	Description The phone number, Facebook page ID, or unique key associated with this Messaging end user.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the Messaging end user. Because this field is editable, we don't recommend referencing it in automation. Instead, use the Messaging Platform Key.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner associated with this Messaging end user. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ProfilePictureUrl	Type url Properties Create, Filter, Group, Nillable, Sort Description The URL of the Messaging end user's profile picture.

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

[MessagingEndUserChangeEvent](#) (API version 62.0)

Change events are available for the object.

[MessagingEndUserHistory](#)

History is available for tracked fields of the object.

MessagingEndUserOwnerSharingRule

Sharing rules are available for the object.

MessagingEndUserShare

Sharing is available for the object.

MessagingLink

Represents the link between a Messaging Channel and where it's shared. This object is available in API version 47.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
EntityType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Possible values are: - Account - Case - Contact - CustomEntityDefinition—Custom Object Definition - Lead - Opportunity
MessagingChannelId	Type reference Properties Create, Filter, Group, Sort Description The channel being shared. This is a relationship field. Relationship Name MessagingChannel Relationship Type Lookup

Field	Details
	Refers To MessagingChannel
RecordTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description This is a relationship field. Relationship Name RecordType Relationship Type Lookup Refers To RecordType
ShouldAttemptAutoLink	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description No longer in use. Indicated that an incoming messaging session was auto-linked to a Salesforce contact or account based on information such as a phone number.
ShouldPromptCreate	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description No longer in use. Indicated that a contact or account was created for the messaging user if none existed.

MessagingSession

Represents a session on a Messaging channel. This object is available in API version 47.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AcceptTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The time when an agent accepts an incoming Messaging session.
AgentMessageCount	Type int Properties Nillable Description The number of messages sent by the agent during the session.
AgentType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The type of agent that is assigned to the Messaging session. Possible values are: • Agent • Bot • BotToAgent—Bot & Agent • System—Used for triggered outbound messages
CaseId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the case associated with this Messaging session.
ChannelEndUserFormula	Type string Properties Filter, Group, idLookup, Nillable, Sort Description A concatenation of the Messaging channel and Messaging user.

Field	Details
ChannelKey	Type string Properties Filter, Group, Nillable, Sort Description The unique identifier for the associated Messaging channel.
ChannelLocale	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The locale of the associated Messaging channel.
ChannelName	Type string Properties Filter, Group, Nillable, Sort Description The name of the associated Messaging channel.
ChannelType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of the associated Messaging channel. Possible values are: • Alexa • AppleBusinessChat—Represents Apple Messages for Business. • EmbeddedMessaging—Available in API version 55.0 and later. • Facebook • GoogleHome • Line • Omega • Phone • Text • Voice • WeChat • WebChat • WhatsApp

Field	Details
ConversationId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the related conversation. Available in API version 55.0 and later. This field is a relationship field. Relationship Name Conversation Relationship Type Lookup Refers To Conversation
EndedByType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Who or what ended the enhanced messaging session. Possible values are: • Agent • Bot • EndUser • System: – The session is inactive for a while, so the session ends. – An automation ends the session. – The session ended because of an error.
EndTime	Type dateTime Properties Create, Filter, Nillable, Sort Description The time when the Messaging session ended.
EndUserId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description The ID of the end user's account record. This is a relationship field. Relationship Name EndUserAccount Relationship Type Lookup Refers To Account
EndUserContactId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the end user's contact record. This is a relationship field. Relationship Name EndUserContact Relationship Type Lookup Refers To Contact
EndUserLanguage	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The preferred language of the messaging user who participated in the messaging session.
EndUserMessageCount	Type int Properties Nillable Description The number of messages sent by the Messaging end user.
LastReferencedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
LeadId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the Lead associated with this Messaging session.
MessagingChannelId	Type reference Properties Create, Filter, Group, Sort Description The ID of the Messaging channel associated with this Messaging session. This is a relationship field. Relationship Name MessagingChannel Relationship Type Lookup Refers To MessagingChannel
MessagingEndUserId	Type reference Properties Create, Filter, Group, Sort Description The ID of the Messaging end user associated with this Messaging session. This is a relationship field.

Field	Details
	Relationship Name MessagingEndUser Relationship Type Lookup Refers To MessagingEndUser
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of this Messaging session.
OpportunityId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the opportunity record associated with this Messaging session.
Origin	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort Description The origin of this Messaging session. Possible values are: • AgentInitiated • ConversationClose—Messaging user deleted the conversation in Apple Messages • ConversationControlLost—Third-party bot resumes control from Salesforce bot or agent • Help • InboundInitiated • OptIn—Opt In Status Change • OptOut—Opt Out Status Change • TriggeredOutbound Messaging sessions can't be created using Apex code. They can be created only through customer initiation or by using Process Builder, flows, or the Start Conversation action.
OwnerId	Type reference

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner associated with this Messaging session. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PreviewDetails	Type string Properties Nillable Description The preview shown to an agent for this Messaging session.
SessionKey	Type string Properties Create, Filter, Group, Nillable, Sort Description The identifier for the Messaging session.
StartTime	Type dateTime Properties Create, Filter, Nillable, Sort Description The time when the Messaging session started.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The status of the Messaging session. Possible values are: • New (standard channels only) • Active

Field	Details
	• Consent (enhanced channels only) • Waiting • Paused (enhanced channels only) • Inactive (enhanced channels only) • Ended • Error (enhanced channels only) To learn more about these statuses, see Lifecycle of a Messaging Session in Salesforce Help.
TargetUserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the target user associated with this Messaging session. This is a relationship field. Relationship Name TargetUser Relationship Type Lookup Refers To User

Usage

To monitor messaging session activity, report on the MessagingSession and [MessagingSessionMetrics](#) on page 3443 objects. MessagingSessionMetrics captures metrics about a messaging session, such as agent and end user response time. See [Report on Messaging Activity in Service Cloud](#).

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

[MessagingSessionChangeEvent](#) (API version 62.0)

Change events are available for the object.

[MessagingSessionFeed](#)

Feed tracking is available for the object.

[MessagingSessionHistory](#)

History is available for tracked fields of the object.

[MessagingSessionOwnerSharingRule](#)

Sharing rules are available for the object.

MessagingSessionShare

Sharing is available for the object.

MessagingSessionMetrics

Represents a metric gathered about a specific enhanced messaging session, such as average agent response time. This object is available starting in October 2024 in API version 62.0 and later.

To reference this object in reports, create a custom report type with Messaging Session as the primary object and Messaging Session Metrics as the secondary object.

Be sure to include the `MessagingSessionMetricType` field in your custom report. These records are available only for Messaging sessions created after October 1, 2024.

Supported Calls

`create()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Multiple MessagingSessionMetrics records are generated when a session ends in an enhanced Messaging channel or Messaging for In-App and Web channel. These records aren't generated for standard messaging sessions.

Fields

Field	Details
MessagingSessionId	Type reference Properties Create, Filter, Group, Sort Description The ID of the related messaging session. This field is a relationship field. Relationship Name MessagingSession Relationship Type Master-detail Refers To MessagingSession (the master object)
MessagingSessionMetricType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort

Field	Details
	Description The metric that this record captures. Possible values are: - AgentMessageCount—The number of messages sent by the agent in the session. - AverageAgentResponseTime—The average number of seconds between an end user's message and the agent's response in the session. - AverageEndUserResponseTime—The average number of seconds between an agent or bot's message and the end user's response in the session. - EndUserMessageCount—The number of messages sent by the end user in the session. - MaxAgentResponseTime—The longest span of time (in seconds) between an end user's message and the agent's response in the session. - MaxEndUserResponseTime— The longest span of time (in seconds) between an agent or bot's message and the end user's response in the session. For each closed messaging session in enhanced Messaging channels and Messaging for In-App and Web, one MessagingSessionMetrics record is generated per MessagingSessionMetricType value. This means that six MessagingSessionMetrics records are generated per session.
MessagingSessionMetricValue	Type int Properties Create, Filter, Group, Sort Description The value of the measured metric. For example, if the MessagingSessionMetricType is EndUserMessageCount, a MessagingSessionMetricValue of 12 means that the end user sent 12 messages during the messaging session.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An autogenerated number identifying the MessagingSessionMetrics record.

MessagingTemplate

Represents a Messaging template used to send pre-formatted messages. This object is available in API version 47.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Fields

Field	Details
Description	Type textarea Properties Create, Nillable, Update Description The description of the Messaging template.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The API name for the Messaging template.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the Messaging template.
MasterLabel	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The label of the Messaging template.
Message	Type textarea Properties Create, Update

Field	Details
	Description The body text of the Messaging template.

MetadataApiOpEventLog

MetadataApiOpEventLog stores details of Metadata API retrieval and deployment requests. This object is available in API version 62.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
<code>ClientIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The API client ID.
<code>ClientIp</code>	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
<code>CpuTime</code>	Type double Properties Filter, Nillable, Sort

Field	Details
	Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
OperationType	Type string Properties Filter, Group, Nillable, Sort Description The operation that's being performed. Possible Values • meta_deploy • meta_list • meta_retrieve • meta_synchronous_create • meta_synchronous_read • meta_synchronous_upsert
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description Globally unique id for a given request. For example: 3nWgxWbDKWWDIk0FKfF5DV.
RunTime	Type double Properties Filter, Nillable, Sort

Field	Details
	Description The amount of time that the request took in milliseconds.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: /home/home.jsp.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 18-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943YAS

MetadataPackage

Represents a package that has been developed in the org you're logged in to. Applies to unlocked, unmanaged, first-generation, and second-generation managed packages.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the package.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description For first-generation and second-generation managed packages, and unlocked packages with namespaces, this field is the namespace prefix assigned to the package. For unmanaged packages, or no-namespace unlocked packages, this field is blank.
PackageCategory	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The type of package. Valid values are: • <code>Application</code> (internal use only) • <code>Module</code> (internal use only) • <code>Package</code>—Represents either an unmanaged package or a first-generation managed package. • <code>Package2</code>—Represents either an unlocked package or a second-generation managed package. The default value is <code>Package</code>. This field is available in API version 49.0 and later.

Usage

Here are examples of the types of API queries you can perform.

Query	String
Show all managed and unmanaged packages in the org	<pre>SELECT Name, NamespacePrefix FROM MetadataPackage</pre>
Show only managed packages in the org	<pre>SELECT Name, NamespacePrefix FROM MetadataPackage WHERE NamespacePrefix <> ''</pre>

MetadataPackageVersion

Represents a package version (managed or unmanaged) that has been uploaded from the org you're logged in to.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
BuildNumber	Type int Properties Filter, Group, Nillable, Sort Description The build number of the version. For example, if you upload two beta versions, they have build numbers 1 and 2. Then, when you upload a non-beta version, the build number is 3. When you upload a new version, the build number resets to 1.
IsDeprecated	Type boolean Properties Filter, Group, Sort Description Indicates whether the package version is deprecated. Available in API version 46.0 and later.
MajorVersion	Type int

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description The first number in a package version number. A version number either has an <code>x.y</code> format or an <code>x.y.z</code> format. The <code>x</code> represents the major version, <code>y</code> the minor version, and <code>z</code> the patch version.
MetadataPackageId	Type reference Properties Filter, Group, Nillable, Sort Description The 18-character package ID starting with 033.
MinorVersion	Type int Properties Filter, Group, Nillable, Sort Description The second number in a package version number. A version number either has an <code>x.y</code> format or an <code>x.y.z</code> format. The <code>x</code> represents the major version, <code>y</code> the minor version, and <code>z</code> the patch version.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the package version.
PatchVersion	Type int Properties Filter, Group, Nillable, Sort Description The third number in a package version number, if present. A version number either has an <code>x.y</code> format or an <code>x.y.z</code> format. The <code>x</code> represents the major version, <code>y</code> the minor version, and <code>z</code> the patch version.
ReleaseState	Type picklist

Field Name	Details
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description If the package version is a beta version, the value is Beta. Otherwise, the value is Released.

Usage

Here are examples of the types of API queries you can perform.

Query	String
Get all package versions for the package that has a MetadataPackageID of 033D00000001xQlIAI	<pre>SELECT Id, Name, ReleaseState, MajorVersion, MinorVersion, PatchVersion FROM MetadataPackageVersion WHERE MetadataPackageId = '033D00000001xQlIAI'</pre>
Get the package version for the package with a specific MetadataPackageID and a major version greater than 1	<pre>SELECT Id FROM MetadataPackageVersion WHERE MetadataPackageId ='033D00000001xQlIAI' AND MajorVersion > 1</pre>
Get released package versions for the package with a specific MetadataPackageID	<pre>SELECT Id FROM MetadataPackageVersion WHERE MetadataPackageId = '033D00000001xQlIAI' AND ReleaseState = 'Released'</pre>

Java Code Sample

Suppose you want to push version 3.4.6 of your package to all orgs. Let's write some code to identify the orgs eligible for the upgrade. This example demonstrates how to generate the list of subscriber orgs eligible to be upgraded to version 3.4.6 of a package.

This code sample uses the Web Services Connector (WSC).

```
// Finds all Active subscriber orgs that have the package installed
String PACKAGE_SUBSCRIBER_ORG_KEY_QUERY = "Select OrgKey from PackageSubscribers where
OrgStatus = 'Active' and InstalledStatus = 'I'";

// Finds all MetadataPackageVersions lower than the version given, including the list
// of subscribers for each version
String METADATA_PACKAGE_VERSION_QUERY = "Select Id, Name, ReleaseState, (%s) from"
+ " MetadataPackageVersion where MetadataPackageId = '%s' AND ReleaseState = 'Released'"

+ " AND (MajorVersion < 3 OR (MajorVersion = 3 and MinorVersion < 4))"
+ " OR (MajorVersion = 3 and MinorVersion = 4 and PatchVersion < 6))";

// conn is an EnterpriseConnection instance initialized with a ConnectionConfig object
// representing a connection to the developer org of the package
QueryResult results = conn.query(String.format(METADATA_PACKAGE_VERSION_QUERY,
PACKAGE_SUBSCRIBER_ORG_KEY_QUERY));
```

```
// This list will hold all of the PackageSubscriber objects that are eligible for upgrade
// to the given version
List<PackageSubscriber> subscribers = new ArrayList<>();
for (SObject mpvso : results.getRecords()) {

    // Cast the sObject to a MetadataPackageVersion
    MetadataPackageVersion mpv = (MetadataPackageVersion) mpvso;

    // Add subscribers to our list
    if (mpv.getPackageSubscribers() != null) {
        for (SObject psso : mpv.getPackageSubscribers().getRecords()) {
            subscribers.add((PackageSubscriber) psso);
        }
    }
}
```

Next Step

Create a push request using PackagePushRequest.

Metric

The Metric object represents the components of a goal metric such as its name, metric type, and current value.

 **Note:** The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(), search(), undelete(), update(), upsert()

Fields

Field Name	Details
CompletionDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The completion date of the metric.
CurrentValue	Type double Properties Create, Defaulted on create, Filter, Nillable, Sort, Update

Field Name	Details
	Description The current value of the metric.
Description	Type textarea Properties Create, Nillable, Update Description The description of the metric. The maximum length is 65,535 characters.
DueDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The due date of the metric.
GoalId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the goal the metric is related to.
InitialValue	Type double Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description The initial value of the metric.
IsCompletionMetric	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Read only. If <code>true</code> , the metric measures whether or not the metric is finished. If <code>false</code> , the metric measures how much is finished compared to a targeted value.
LastComment	Type textarea

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description A comment that provides more context about the metric, such as its status or progress. The maximum length is 255 characters.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp that indicates when a user last viewed a record that is related to this metric.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp that indicates when a user last viewed this metric. If this value is null, this record might have been only referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Create, Filter, Group, Sort, Update Description The name of the metric.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the user who owns the metric.
Progress	Type percent Properties Filter, Nillable, Sort

Field Name	Details
	Description Read only. The overall progress of the metric.
RecordTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the related record type.
StartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The start date of the metric.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The status of the metric. Possible values include: • Not Started • On Track • Behind • Critical • Completed • Postponed • Canceled • Not Completed
TargetValue	Type double Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description The target value of the metric.
Weight	Type double

Field Name	Details
	Properties Create, Filter, Nillable, Sort, Update
	Description The weight of the metric. The sum of the weights should equal 100%.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

MetricFeed

Feed tracking is available for the object.

MetricHistory

History is available for tracked fields of the object.

The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

MetricOwnerSharingRule

Sharing rules are available for the object.

The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

MetricShare

Sharing is available for the object.

MetricDataLink

The link between the metric and the data source, such as a report.



Note: The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
DatasourceFieldName	Type string
	Properties Create, Filter, Group, Sort, Update

Field Name	Details
	Description The field name of the data source, such as a report summary field.
DataSourceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the data source.
LastSynchronizationTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The last time the data was synchronized.
Name	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description The name given to the data link record.
TargetId	Type reference Properties Create, Filter, Group, Sort Description The ID of the metric that the data is linked to.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

MetricDataLinkHistory

History is available for tracked fields of the object.

The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

MigratedEmail

For internal use only.

MilestoneType

Represents a milestone (required step in a customer support process). This object is available in API version 18.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, only Salesforce admins, users with access to the Case, Entitlement, or Work Order objects, and users with the View Setup and Configuration permission can access this object.

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Nillable, Update Description A description of the milestone.
Name	Type string Properties Create, Filter, idLookup, Update Description The name of the milestone.
RecurrenceType	Type picklist Properties Create, Update Description The type of recurrence for the milestone.

Usage

Use this object to query and manage the milestone type for CaseMilestone records.

SEE ALSO:

- [CaseMilestone](#)
- [SlaProcess](#)

MktJourneyDcsnSetup

Represents a collection of Marketing Cloud Engagement journeys that you can interact with by using Salesforce Flow in Marketing Cloud. This object is available in API version 65.0 and later.

You can use interaction data from a Marketing Cloud Engagement journey to trigger a Flow, or to configure decision activities in a Flow.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
BusinessUnitId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The unique Marketing Cloud business unit ID to use with the collection of journeys. This ID is configured in Marketing Cloud, and is different from the Member ID (MID) or Enterprise ID (EID) of your Marketing Cloud Engagement account. This field is a relationship field. Relationship Name BusinessUnit Refers To BusinessUnit
Description	Type textarea Properties Create, Nillable, Update Description A description of the collection of journeys.

Field	Details
EnterpriseIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The Enterprise ID (EID) of your parent Marketing Cloud Engagement account.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description A name for the collection of journeys.

MLField

Represents a single field in a data definition. This object is available in API version 50.0 and later.

Supported Calls

`delete()`, `describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
Entity	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The object that contains the field.
Field	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The name of the field.

MlIntentUtteranceSuggestion

Represents a customer input, used for training purposes in the feedback loop process of a conversation. Admins can add these inputs to the intent training model. This object is available in API version 51.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
ConfigId	Type reference Properties Filter, Group, Nillable, Sort
IntentSuggestion	Type string Properties Filter, Group, Nillable, Sort Description The recommended intent.
ReviewStatus	Type picklist Properties Filter, Group, Restricted Picklist, Sort Description Possible values are: Ignore, New
Utterance	Type string Properties Filter, Group, Sort Description The text input from the end user.
UtteranceCount	Type integer Properties Filter, Group, Sort

Field	Details
	Description A count of the Utterance field.

MLPredictionDefinition

Represents a prediction definition that specifies details about the prediction. This object is available in API version 50.0 and later.

Supported Calls

`delete()`, `describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
ApplicationId	Type reference Properties Filter, Group, Nillable, Sort Description The unique ID of the parent AI Application.
DeveloperName	Type string Properties Filter, Group, Sort Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort

Field	Details
	Description The language of the prediction. Possible values are: • da—Danish • de—German • en_US—English • es—Spanish • es_MX—Spanish (Mexico) • fi—Finnish • fr—French • it—Italian • ja—Japanese • ko—Korean • nl_NL—Dutch • no—Norwegian • pt_BR—Portuguese (Brazil) • ru—Russian • sv—Swedish • th—Thai • zh_CN—Chinese (Simplified) • zh_TW—Chinese (Traditional)
MasterLabel	Type string Properties Filter, Group, Sort Description Label that identifies the prediction throughout the Salesforce user interface.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description Specifies the namespace of the prediction, if installed with a managed package.
PredictionField	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description Field that the prediction is based on.
PushbackField	Type string Properties Filter, Group, Nillable, Sort Description Field that the prediction writes scores to.
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The status of the prediction. Possible values are: • Disabled • Draft • Enabled
Type	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of model that returns the prediction values. Possible values are: • BinaryClassification • DeepLearningIntentClassification • DeepLearningNameEntityRecognition • GlobalDeepLearningIntentClassification • GlobalDeepLearningNameEntityRecognition • LanguageDetection • MulticlassClassification • Regression • ScoringSpecificOutcome

MLModel

Represents an AI model that can be used in Einstein Prediction Builder, Einstein Recommendation Builder, and other Einstein features. This object is available in API version 53.0 and later.

This object contains information that represents many types of AI models. Some fields contain information for only a specific type of model.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Available with Einstein Prediction Builder and Einstein Recommendation Builder.

Fields

Field	Details
ApprovalStatus	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Indicates whether the model is approved, pending approval, or rejected. Possible values are: • Approved • Pending • Rejected The default value is Pending.
Dataset	Type string Properties Filter, Group, Nillable, Sort Description The ID of the dataset used to create the model.
ModelType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description Indicates the type of model. Possible values are: • BinaryClassification • DecisionTree • DeepLearningIntent • DeepLearningNER • GeneralizedLinearModels • GlobalDeepLearningIntent • GlobalDeepLearningNER • GlobalLanguageDetection • GradientBoostedTrees • LinearRegression • LinearSupportVectorClassifiers • LogisticRegression • MulticlassClassification • NaiveBayes • NeuralNet • PopularityCount • RandomForest • Regression • XGBoost
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The automatically generated ID that uniquely identifies the model.
PredictionDefinitionId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the related prediction definition. This field is a relationship field. Relationship Name PredictionDefinition

Field	Details
	Relationship Type Lookup
	Refers To MLPredictionDefinition
RecommendationDefinitionId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description The ID of the related recommendation definition. This field is a relationship field.
	Relationship Name RecommendationDefinition
	Relationship Type Lookup
	Refers To MLRecommendationDefinition
ScoringStatus	Type picklist
	Properties Filter, Group, Restricted picklist, Sort
	Description Indicates whether scoring is enabled or disabled. Possible values are: - Disabled - Enabled
TrainingEndTime	Type dateTime
	Properties Filter, Nillable, Sort
	Description Indicates the date and time when the training ended.
TrainingStartTime	Type dateTime
	Properties Filter, Nillable, Sort

Field	Details
	Description Indicates the date and time when the training started.

MLModelFactor

Represents a field value that has a positive or negative effect on the model's score. This object is available in API version 53.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Available with Einstein Prediction Builder and Einstein Recommendation Builder.

Fields

Field	Details
Correlation	Type double Properties Filter, Nillable, Sort Description Shows the strength of association between the variable and the outcome. The higher the correlation, the greater the association.
FactorType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of factor. Possible values are: • ModelFactlet—The field value strongly influences the outcome because the model determined that this field is always important. For example, the model can decide that the field <code>Industry</code> is always important to the outcome, regardless of its value. • ModelFactor—The field value is important to the outcome because the field's value is significant. For example, the model can decide that the <code>Annual Revenue</code> field value is important to the outcome because the value is above \$1,000,000 or below \$50,000.

Field	Details
Importance	Type double Properties Filter, Nillable, Sort Description Shows how much the variable influences the outcome. The higher the value, the greater the impact.
ModelId	Type reference Properties Filter, Group, Sort Description The ID of the related model. This field is a relationship field. Relationship Name Model Relationship Type Lookup Refers To MLModel
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The automatically generated ID that uniquely identifies the model.
Type	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of model factor. Possible values are: • And • Basic • Or

Field	Details
Weight	Type double Properties Filter, Nillable, Sort Description Indicates how significant the field value is to the outcome or score. Model factlets tend to have higher weights than model factors.

MLModelFactorComponent

Represents information about the related MLModelFactor. For example, this object can represent a field value or a field range such as "Title = CEO" or "Annual Revenue >10000000". This object is available in API version 53.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Available with Einstein Prediction Builder and Einstein Recommendation Builder.

Fields

Field	Details
FactorLabelKey	Type string Properties Filter, Group, Nillable, Sort Description Maps the model factor component to a label that can be displayed to the user.
FeatureType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description FeatureType and FeatureValue indicate a feature that doesn't have a corresponding field. For example, to indicate the feature "Percent = 97%", the FeatureType is Percent and the FeatureValue is 97. Possible values are:

Field	Details
	• Binary • Combobox • Currency • Date • DateTime • Email • ID • Integral • MultiPicklist • Percent • Phone • Picklist • Real • Text • TextArea • URL
FeatureValue	Type string Properties Filter, Group, Nillable, Sort Description The feature's value. See <code>FeatureType</code>.
LeftHandDerivedField	Type string Properties Filter, Group, Nillable, Sort Description If the model factor component is an equation, this field represents the name of the field on the left side of the equation. For example, if the model factor component is <code>Title = CEO</code>, this value is <code>Title</code>.
ModelFactorId	Type reference Properties Filter, Group, Sort Description The ID of the related <code>MLModelFactor</code>. This field is a relationship field.

Field	Details
	Relationship Name ModelFactor Relationship Type Lookup Refers To MLModelFactor
ModelId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the related MLModel. This field is a relationship field. Relationship Name Model Relationship Type Lookup Refers To MLModel
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The automatically generated ID that uniquely identifies the model.
Operator	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description If the model factor component is an equation, this field represents the operator. For example, if the model factor component is <code>Title = CEO</code>, the operator is <code>Equals</code>. Possible values are: • Contains • EndsWith • Equals • GreaterThan

Field	Details
	• <code>IsNotNull</code> • <code>IsNull</code> • <code>LessThan</code> • <code>NotEquals</code> • <code>StartsWith</code>
<code>RightHandDerivedField</code>	Type string Properties Filter, Group, Nillable, Sort Description If the model factor component is an equation, this field represents the name of the field on the right side of the equation.
<code>SortOrder</code>	Type int Properties Filter, Group, Nillable, Sort Description If the model factor has multiple model factor components, this field indicates the order in which this model factor component appears.
<code>Value</code>	Type string Properties Filter, Group, Nillable, Sort Description If the model factor component specifies a value, this field represents the value. For example, if the model factor component is <code>Title = CEO</code>, this field is <code>CEO</code>.

MLModelMetric

Represents a metric or statistic about the related model, such as accuracy, precision, or RSquared. Use a model's metrics to learn about its performance and to compare it with other models. This object is available in API version 53.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Available with Einstein Prediction Builder and Einstein Recommendation Builder.

Fields

Field	Details
BasicMetricValue	Type double Properties Filter, Nillable, Sort Description The value of a basic metric. A basic metric is a single number. For metrics that comprise a set of graph points, see <code>ComplexMetricValue</code> .
ComplexMetricValue	Type textarea Properties Nillable Description The X and Y values for a complex metric. A complex metric is a coordinate on a graph. For example, in classification models, you can use a line on a graph to create classification categories.
DataSetType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of dataset. Possible values are: • Baseline • HoldOut • Live • Model • Training
EndTime	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The date and time when the model training finished.
GraphType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of graph. Possible values are: - ConfidencePlot - ConfusionMatrixPerThreshold - DiscountedCumulativeGainsGraph - HitRateGraph - KBasedRankingGraph - LiftPlot - MeanReciprocalRankGraph - MultiClassConfusionMatrixPerThreshold - MultiClassMisclassifications - NormalizedDiscountedCumulativeGainsGraph - PrecisionGraph - RecallGraph - RegressionErrorBands
MetricType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of metric. Possible values are: - Accuracy - AveragePrecision - BalancedAccuracy - DiscountedCumulativeGainAtK - ExpectedTopAbsoluteRank - ExpectedTopPercentileRank - F1Score - FMeasure

Field	Details
	• HitRateAtK • LiftBucket • MeanAbsoluteError • MeanAbsoluteRank • MeanAveragePrecisionAtK • MeanPercentileRank • MeanReciprocalRank • MeanReciprocalRankAtK • MeanTopReciprocalRank • NormalizedDiscountedCumulativeGainsAtK • Precision • PrecisionAtK • RSquared • Recall • RecallAtK • RootMeanSquaredError • auPR • auROC
ModelId	Type reference Properties Filter, Group, Sort Description The ID of the related MLModel. This field is a polymorphic relationship field. Relationship Name Model Relationship Type Lookup Refers To MLModel
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An automatically generated ID that uniquely identifies the metric.

Field	Details
RowCount	Type int Properties Filter, Group, Nillable, Sort Description The number of rows.
Span	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The time span for the metric. Possible values are: • Day • Hour • Month • SinceLastAction • Week
StartTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the model training started.

MLRecommendationDefinition

For internal use only.

MobileDeviceAppRegistration

Represents the details provided in a mobile device registration event from an app that uses the Engagement Mobile SDK. This object is available in API version 65.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
DatetimeInDevice	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time of the registration event, based on values provided by the device.
DeviceModel	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The model of the device that's being registered, such as <code>iPhone 17</code> or <code>Google Pixel</code>.
DevicePlatform	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The operating system of the mobile device, such as <code>iPhone OS</code> or <code>Android</code>.
DeviceSystemToken	Type string Properties Create, Filter, Nillable, Sort, Update Description A unique token that represents the mobile device. The push notification service (such as Apple Push Notification service or Firebase Cloud Messaging) uses this token to deliver messages to the device.
DeviceSystemTokenHash	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A hash of the device token.
DeviceTimezone	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The time zone that the device is located in when the registration event occurs.
DeviceVersion	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The version or model number of the device.
Deviceid	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A unique identifier for the mobile device.
Eventid	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A unique identifier for the registration event.
IsBackgroundRefreshEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the device gives permission for the app to receive updates while it's in the background. The default value is <code>false</code>.
IsBluetoothEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether Bluetooth is enabled on the device.

Field	Details
	The default value is <code>false</code> .
<code>IsDst</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the device's locale observes daylight saving time (DST). The default value is <code>false</code> .
<code>IsLocationEnabled</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the device has location services enabled for the app. The default value is <code>false</code> .
<code>IsPushEnabled</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the device has push notifications enabled for the app. The default value is <code>false</code> .
<code>Locale</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The locale string for the device, such as <code>en_US</code> or <code>ja_JP</code> .
<code>MobileAppName</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the mobile app, as configured in Setup.

Field	Details
MobileAppVersion	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The version number of the mobile app that generated the registration event.
MobileAppid	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A unique ID that represents the mobile app.
PartyIdentificationName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the party identifier for identity resolution rules.
PartyIdentificationNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The ID used for identity resolution comparisons.
PartyIdentificationType	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A string that provides additional information about the type of party identifier used, such as Driver License or SSN.
RegistrationDatetime	Type dateTime Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description The date and time when the registration event occurred.
Registrationid	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A unique ID for the registration event.
SdkVersion	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The version of the Mobile Engagement SDK that the app uses.

MobileSecurityAssignment

Represents the assignment of mobile security policies to a profile. The policies apply to the Salesforce mobile app with Enhanced Mobile App Security enabled. This object is available in API version 54.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Accessing this object requires the Enhanced Mobile App Security add-on subscriptions and the Enforce Enhanced Mobile App Security user permission.

Fields

Field	Details
DeveloperName	Type string

Field	Details
	Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. The name: • must be 40 characters or fewer • must begin with a letter • can contain only underscores and alphanumeric characters • can't include spaces • can't end with an underscore • can't contain 2 consecutive underscores In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The combined language and locale ISO code, which controls the language of the MobileSecurityAssignment.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Label for this MobileSecurityAssignment value. This display value is the internal label that doesn't get translated.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values.

Field	Details
	- In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. - In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
<code>ProfileId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The profile ID that the mobile security policies are assigned to. This field is a relationship field. Relationship Name Profile Refers To Profile

MobileSecurityPolicy

Enables mobile security policies on the Salesforce mobile app with Enhanced Mobile Security. This object is available in API version 50.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. Because changing terms in our code can break current implementations, we maintained this object's name.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Accessing this object requires the Enhanced Mobile App Security add-on subscriptions and the Enforce Enhanced Mobile App Security user permission.

Fields

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
EffectiveDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date a mobile security policy is enforced.
IsEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description A value indicating whether a mobile security policy is enabled. The default value is 'false'.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The two-to five-character code that represents the language and locale ISO.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The label of the mobile security policy.

Field	Details
MobilePlatform	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The mobile operating system. Possible values are: • Android • iOS
MobileSecurityAssignmentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the ID of the mobile security assignment. This is a relationship field. Relationship Name MobileSecurityAssignment Relationship Type Lookup Refers To MobileSecurityAssignment
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, NamespacePrefix is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer.

Field	Details
	In orgs that aren't Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
RuleValue	Type string Properties Create, Filter, Group, Sort, Update Description Value of the mobile security policy rule.
RuleValueType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of mobile security policy rule. Possible values are: - Boolean - Text - TextList
SeverityLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The severity level of a mobile security policy. Possible values are: - Critical - Error - Info - Warn
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of mobile security policy.

Field	Details
	Possible values are: • AllowedDeviceList—Allowed Device List • Block3dTouch—Block 3D Touch • BlockCalendar—Block Calendar • BlockCamera—Block Camera • BlockContacts—Block Contacts • BlockCustomKeyboard—Block Custom Keyboard • BlockFileBackup—Block File Backup • BlockMicrophone—Block Microphone • BlockOsSharing—Block OS Share Actions • BlockedDeviceList—Blocked Device List • BrowserUriScheme—Mobile Browser URI Scheme • CheckBiometric—Check Biometric Login Data • DevicePasscode—Require Device Passcode • DisableUrlCaching—Disable URL Caching • JailbrokenDevice—Block Jailbroken Device • LogCertPin—Log Certificate Pinning • LogEmail—Log Email • LogPhonecall—Log Phone Call • LogPolicyResult—Log Security Policy Evaluation Result • LogScreenshot—Log Screenshot • LogTextmessage—Log SMS • LogoutAfterRestart—Log Out User After Device Restart • LogoutOnBiometricChange—Log Out User After Changing Biometric Login Data • MalwareDetection—Malware Detection • ManInMiddle—Block Man In The Middle Attack • MaxOffline—Maximum Days Offline Without Policy Refresh • MaximumAppVersion—Maximum Application Version • MaximumOsVersion—Maximum OS Version • MinimumAppVersion—Minimum Application Version • MinimumOsVersion—Minimum OS Version • MinimumSecurityPatchVersion—Minimum Security Patch Version • PhonecallUriScheme—Phone Call Application Handler • Screenshot—Block Screenshot

MobileSecurityUserMetric

Represents the metrics for users who have Enhanced Mobile Security policies enforced. This object is available in API version 51.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Accessing this object requires the Enhanced Mobile App Security add-on subscriptions and the Enforce Enhanced Mobile App Security user permission.

Fields

Field	Details
MetricsDate	Type date Properties Filter, Group, Sort Description The date the metrics were collected.
UserCount	Type double Properties Filter, Nillable, Sort Description The number of users who have mobile security policies enforced.

Usage

A user with the Manage Enhanced Mobile App Security permission can run this SOQL query.

```
SELECT MetricsDate, UserCount
FROM MobileSecurityUserMetric
ORDER BY MetricsDate DESC
```

MobileSettingsAssignment

Represents the assignment of a particular field service mobile settings configuration to a user profile. This object is available in API version 41.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()` —available in API version 51.0 and later, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
FieldServiceMobileSettingsId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of a set of field service mobile settings.
ProfileId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the profile to associate with the set of field service mobile settings.

MobSecurityCertPinConfig

Configuration of mobile security certificate pinning on the Salesforce mobile app with Enhanced Mobile Security. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Accessing this object requires the Enhanced Mobile App Security add-on subscriptions and the Enforce Enhanced Mobile App Security user permission.

Fields

Field	Details
CertificateHash	Type string Properties Create, Filter, Group, Sort, Update Description The unique identifier for the certificate.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API.
DomainName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the domain.
IsEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The default value is False.
IsSubdomainIncluded	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The default value is False.
Language	Type string Properties Create, Filter, Group, Sort, Update

Field	Details
	Description The two-to five-character code that represents the language and locale ISO.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The master label of the mobile security pin.
MobilePlatform	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The mobile operating system. Possible values are: • Android • iOS
MobileSecurityAssignmentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the ID of the mobile security assignment. This is a relationship field. Relationship Name MobileSecurityAssignment Relationship Type Lookup Refers To MobileSecurityAssignment
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can

Field	Details
	refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. - In Developer Edition orgs, <i>NamespacePrefix</i> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. - In orgs that aren't Developer Edition orgs, <i>NamespacePrefix</i> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
SeverityLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The severity level of a mobile security policy. Possible values are: - Critical - Error - Info - Warn
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of pin Possible values are: - AuthServer—Authentication Server - Resource—Resource

MobSecurityCertPinEvent

The event of mobile security certificate pinning on the Salesforce mobile app with Enhanced Mobile Security. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `describeSObjects()`

Special Access Rules

Accessing this object requires the Enhanced Mobile App Security add-on subscriptions and the Enforce Enhanced Mobile App Security user permission.

Fields

Field	Details
<code>AppPackageIdentifier</code>	Type string Properties Create Description The unique identifier for the certificate.
<code>AppVersion</code>	Type string Properties Create Description The version of the app.
<code>CertPinResults</code>	Type json Properties Create Description The results of certificate pinning.
<code>DeviceIdentifier</code>	Type string Properties Create Description The hardware IDs or IDs to uniquely identify a mobile device.
<code>DeviceModel</code>	Type string

Field	Details
	Properties Create Description The model of the mobile device.
EventDate	Type dateTime Properties Create, Nillable Description The date of the certificate pinning event.
EventDescription	Type string Properties Create, Nillable Description The description of the certificate pinning event.
EventIdentifier	Type string Properties Create, Nillable Description The ID of the certificate pinning event.
EventUuid	Type string Properties Nillable Description The universally unique identifier of the event.
OsName	Type string Properties Create Description The name of the operating system.
OsVersion	Type string

Field	Details
	Properties Create Description The version of the operating system.
ReplayId	Type string Properties Nillable Description The position of the event in the event stream.
UserId	Type reference Properties Create Description This is polymorphic relationship field. Relationship Name User Relationship Type Lookup Refers To User
WebkitVersion	Type string Properties Create, Nillable Description The version of the web browser engine developed by Apple.

MsgChannelLanguageKeyword

Represents the consent configuration for a Messaging channel. This object is available in API version 48.0 and later.

Supported Calls

`describeSObjects()`, `delete()`, `query()`, `retrieve()`, `search()`

Fields

Field	Details
CustomKeywords	Type textarea Properties Nillable Description The keywords a Messaging end user can send to receive the Custom Response.
CustomResponse	Type textarea Properties Nillable Description The automated response sent when a Messaging end user sends a Custom Keyword.
DoubleOptInKeywords	Type textarea Properties Nillable Description The keywords a Messaging end user can send to doubly opt in to receiving messages.
HelpKeywords	Type textarea Properties Nillable Description The keywords a Messaging end user can send to request help during a Messaging session.
HelpResponse	Type textarea Properties Nillable Description The automated response sent when a Messaging end user requests help.
MasterLanguage	Type textarea

Field	Details
	Properties Description The language used for this consent configuration.
MessagingChannelId	Type reference Properties Filter, Group, Sort Description The ID of the associated Messaging channel. This is a relationship field. Relationship Name MessagingChannel Relationship Type Lookup Refers To MessagingChannel
MessagingChannelUsageId	Type reference Properties Filter, Group, Sort Description The ID of the associated Messaging channel usage record, which is in turn associated with a messaging channel. This is a relationship field. Relationship Name MessagingChannelUsage Relationship Type Lookup Refers To MessagingChannelUsage
OptInConfirmation	Type textarea Properties Nillable Description The automated response sent when a Messaging end user opts in to receiving messages.

Field	Details
OptInKeywords	Type textarea Properties Nillable Description The keywords a Messaging end user can send to explicitly opt in to receiving messages.
OptOutConfirmation	Type textarea Properties Nillable Description The automated response sent when a Messaging end user opts out of receiving messages.
OptOutKeywords	Type textarea Properties Nillable Description The keywords a Messaging end user can send to opt out of receiving messages.

MsgChannelUsageExternalOrg

Represents the Enterprise ID (EID) and Business Unit (MID) for Marketing Cloud connections in a Unified Messaging channel. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
ExternalOrgIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort Description The Enterprise ID (EID) of a Marketing Cloud connection.

Field	Details
ExternalSubOrgIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The Business Unit (MID) of a Marketing Cloud connection.
MessagingChannelUsageId	Type reference Properties Create, Filter, Group, Sort Description The associated MessagingChannelUsage record, which must have a DeploymentType of MJ (referring to Marketing Cloud Journey Builder). This field is a relationship field. Relationship Name MessagingChannelUsage Relationship Type Lookup Refers To MessagingChannelUsage

Usage

MsgChannelUsageExternalOrg records apply only to MessagingChannelUsage records related to Marketing Cloud.

Only one MsgChannelUsageExternalOrg record can exist for each MessagingChannelUsage record with a DeploymentType of MJ. MsgChannelUsageExternalOrg records are created when an admin enters the EID and MID for a Marketing Cloud application in Unified Messaging Setup and then clicks **Connect**.

The data saved in a MsgChannelUsageExternalOrg record is used for making a connection to Marketing Cloud. If an admin disconnects a Marketing Cloud application in Unified Messaging Setup, the saved EID and MID are used during deprovisioning.

MyDomainDiscoverableLogin

Represents configuration settings when the My Domain login page type is Discovery. Login Discovery provides an identity-first login experience, where the login page contains the identifier field only. Based on the identifier entered, a handler determines how to authenticate the user. This object is available in API version 45.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
ApexHandlerId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the Apex handler that contains the Discovery authentication logic. This is a relationship field. Relationship Name ApexHandler Relationship Type Lookup Refers To ApexClass
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
ExecuteApexHandlerAsId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the user who is executing the handler. Requires Manage User permission. This is a relationship field. Relationship Name ExecuteApexHandlerAs

Field Name	Details
	Relationship Type Lookup Refers To User
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the <code>MasterLabel</code> . Possible values are: • <code>da</code> (Danish) • <code>de</code> (German) • <code>en_US</code> (English) • <code>es</code> (Spanish) • <code>es_MX</code> (Spanish - Mexican) • <code>fi</code> (Finnish) • <code>fr</code> (French) • <code>it</code> (Italian) • <code>ja</code> (Japanese) • <code>ko</code> (Korean) • <code>nl_NL</code> (Dutch) • <code>no</code> (Norwegian) • <code>pt_BR</code> (Portuguese - Brazilian) • <code>ru</code> (Russian) • <code>sv</code> (Swedish) • <code>th</code> (Thai) • <code>zh_CN</code> (Chinese - Simplified) • <code>zh_TW</code> (Chinese - Traditional)
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The name of the action link group template.
UsernameLabel	Type string

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Login prompt on login page when the My Domain login page type is Discovery. It supports localization with custom labels.

Usage

Use this object to access the My Domain Login Discovery Page, which is a login page type that prompts users to identify themselves with an email address, phone number, or custom identifier. My Domain Login Discovery performs an interview-based login process, where users are first prompted to provide identity and then authenticated. For example, users receive a verification code that they enter to complete the login process.

MutingPermissionSet

Represents a set of disabled permissions and is used in conjunction with PermissionSetGroup. This object is available in API version 46.0 and later.

Use a muting permission set with a permission set group to mute certain permissions. For instance, you have a subscriber org using a managed package that contains a permission set group. To use the existing permission set group, the subscriber org can disable specific permissions with a muting permission set. Or, perhaps you have a permission set group that contains several permission sets managed by different departments. Use a muting permission set to disable specific permissions based on your organization's needs.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, only users who have one of these permissions can access this object:

- View Setup and Configuration
- Manage Session Permission Set Activations
- Assign Permission Sets

Fields

Field Name	Details
DeveloperName	Type string
	Properties Create, Filter, Group, Sort, Update

Field Name

Details

Description

The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.



Note: When creating large sets of data, always specify a unique DeveloperName for each record. If no DeveloperName is specified, performance can slow while Salesforce generates one for each record.



Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.

Language

Type

picklist

Properties

Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description

The language of the muting permission set.

Possible values are:

- `da` (Danish)
- `de` (German)
- `en_US` (English)
- `es` (Spanish)
- `es_MX` (Spanish - Mexican)
- `fi` (Finnish)
- `fr` (French)
- `it` (Italian)
- `ja` (Japanese)
- `ko` (Korean)
- `nl_NL` (Dutch)
- `no` (Norwegian)
- `pt_BR` (Portuguese - Brazilian)
- `ru` (Russian)
- `sv` (Swedish)
- `th` (Thai)
- `zh_CN` (Chinese - Simplified)
- `zh_TW` (Chinese - Traditional)

Field Name	Details
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The muting permission set label for the aggregated, disabled permissions.
PermissionsPermissionName	Type boolean Properties Create, Filter, Update Description One field for each permission. If <code>true</code> , the permission is disabled in the related permission set group. The number of fields varies depending on the permissions for the organization and license type. To get a list of available permissions, use <code>describeSObjects()</code> .

Usage

Use `MutingPermissionSet` to disable specified permissions within a permission set group.

Name

Non-queryable object that provides information about foreign key traversals when the foreign key has more than one parent.

This object is used to retrieve information from related records where the related record can be from more than one object type (a polymorphic foreign key). For example, the owner of a case can be either a user or a group (queue). This object allows retrieval of the owner name, whether the owner is a user or a group (queue). You can use a `describe` call to access the information about parents for an object, or you can use the `who`, `what`, or `owner` fields (depending on the object) in SOQL queries. This object can't be directly accessed.

Supported Calls

`describeSObjects()`

Fields

Field	Details
Alias	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The user alias. This field contains a value only if the related record is a user.
Email	Type email Properties Filter, Group, Nillable, Sort Description The email address of the user or group (queue).
FirstName	Type string Properties Filter, Group, Nillable, Sort Description The first name of the user, contact, or lead.
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the related record is an active user (<code>true</code>) or not (<code>false</code>). This field contains a value only if the related record is a user.
LastName	Type string Properties Filter, Group, Nillable, Sort Description The last name of the user, contact, or lead.
LastReferencedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp when the current user last interacted with this record, directly or indirectly.

Field	Details
LastViewedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (<code>LastReferencedDate</code>), but not viewed it.
MiddleName	Type string Properties Filter, Group, Nillable, Sort Description The middle name of the user contact, or lead.
Name	Type string Properties Filter, Group, Nillable, Sort Description The name of the parent of the object queried. If the parent is a user, contact, or lead, the value is a concatenation of the <code>FirstName</code>, <code>MiddleName</code>, <code>LastName</code>, and <code>Suffix</code> fields of the related record.
Phone	Type phone Properties Filter, Group, Nillable, Sort Description The phone number of the user. This field contains a value only if the related record is a user.
Profile	Type reference Properties Filter, Nillable Description The Profile of the user. Only populated if the related record is a user.
ProfileId	Type reference

Field	Details
	Properties Filter, Group, Nillable, Sort Description ID of the user's Profile. Only populated if the related record is a user. This field is a relationship field. Relationship Name Profile Relationship Type Lookup Refers To Profile
Suffix	Type string Properties Filter, Group, Nillable, Sort Description The name suffix of the user, contact, or lead.
Title	Type string Properties Filter, Group, Nillable, Sort Description The title of the user, for example CFO or CEO.
Type	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description A list of the types of sObject that can be an owner of this object. You can use this field to filter on a type of owner, for example, return only the leads owned by a user.
Username	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description Contains the name that a user enters to log into the API or the user interface. The value for this field is in the form of an email address, and is only populated if the related record is a user.
UserRole	Type picklist Properties Filter, Nillable Description Name of the <code>Role</code> played by the user. Only populated for user rows.
UserId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user role associated with this object. This field is a relationship field. Relationship Name UserRole Relationship Type Lookup Refers To UserRole

Usage

To query on relationships where the parent can be more than one type of object, use `who`, `what`, or `owner` relationship fields.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

NamedCredential

Represents a named credential, which specifies the URL of a callout endpoint and its required authentication parameters in one definition. A named credential can be specified as an endpoint to simplify the setup of authenticated callouts. This object is available in API version 33.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. Because changing terms in our code can break current implementations, we maintained this object's name.



Note: All credentials stored within this entity are encrypted under a framework that is consistent with other encryption frameworks on the platform. Salesforce encrypts your credentials by auto-creating org-specific keys. Credentials encrypted using the previous encryption scheme have been migrated to the new framework.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

As of Spring '20 and later, only users with the View Setup and Configuration permission can access this object.

Fields

Field Name	Details
AuthProviderId	Type reference Properties Filter, Group, Nillable, Sort Description Salesforce ID of the authentication provider, which defines the service that provides the login process and approves access to the external system. Only users with the “Customize Application” and “Manage AuthProviders” permissions can view this field. This field is a relationship field. This field is only valid for legacy named credentials. This field was first available in API version 39.0, this field is deprecated in API version 56.0. Relationship Name AuthProvider Relationship Type Lookup Refers To AuthProvider
AuthTokenEndpointUrl	Type textarea Properties Nillable

Field Name	Details
	Description The URL where SON Web Tokens (JWTs) are exchanged for access tokens. This field is only valid for legacy named credentials. This field was first available in API version 46.0, this field is deprecated in API version 56.0.
CalloutOptionsAllowMergeFieldsInBody	Type boolean Properties Filter Description For Apex callouts, indicates whether the code can use merge fields to populate HTTP request bodies with org data. This field is available in API version 35.0 and later.
CalloutOptionsAllowMergeFieldsInHeader	Type boolean Properties Filter Description For Apex callouts, indicates whether the code can use merge fields to populate HTTP headers with org data. This field is available in API version 35.0 and later.
CalloutOptionsGenerateAuthorizationHeader	Type boolean Properties Filter Description Indicates whether Salesforce automatically generates a standard authorization header for each callout to the named credential–defined endpoint. This field is available in API version 35.0 and later.
DeveloperName	Type string Properties Filter, Group, Sort

Field Name	Details
	Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Endpoint	Type textarea Properties Nillable Description The root URL of the endpoint. This field is only valid for legacy named credentials. This field is deprecated in API version 56.0.
JwtAudience	Type textarea Properties Nillable Description External service or other allowed recipients for the JSON Web Token. Written as JSON, with a quoted string for a single audience and an array of quoted strings for multiple audiences. Single audience example: "aud1". Multiple audiences example: ["aud1", "aud2", "aud3"]. This field is only valid for legacy named credentials. This field was first available in API version 46.0, this field is deprecated in API version 56.0.
JwtFormulaSubject	Type string Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description Formula string calculating the JSON Web Token's subject. API names and constant strings, in single quotes, can be included. Allows a dynamic Subject unique per user requesting the token. For example, 'User='+\$User.Id. Use this field when <code>PrincipalType</code> is set to <code>PerUser</code>. Corresponds to Per User Subject in the user interface. This field is only valid for legacy named credentials. This field was first available in API version 46.0, this field is deprecated in API version 56.0.
JwtIssuer	Type string Properties Filter, Group, Nillable, Sort Description Specify who issued the JSON Web Token using a case-sensitive string. This field is only valid for legacy named credentials. This field was first available in API version 46.0, this field is deprecated in API version 56.0.
JwtTextSubject	Type string Properties Filter, Group, Nillable, Sort Description Static text, without quotes, that specifies the JSON Web Token subject. Use this field when <code>PrincipalType</code> is set to <code>NamedUser</code>. Corresponds to Named Principal Subject in the user interface. This field is only valid for legacy named credentials. This field was first available in API version 46.0, this field is deprecated in API version 56.0.
JwtValidityPeriodSeconds	Type int Properties Filter, Group, Nillable, Sort Description The number of seconds that the JSON Web Token is valid. This field is only valid for legacy named credentials.

Field Name	Details
	This field was first available in API version 46.0, this field is deprecated in API version 56.0.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language of the <code>MasterLabel</code>.
MasterLabel	Type string Properties Filter, Group, Sort Description The label for the named credential. This display value is the internal label that doesn't get translated.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation.
PrincipalType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Tracks users who are accessing the external system. <code>Anonymous</code> implies that a user identity isn't specified for external system access. <code>Named Principal</code> uses one user identity for all users to access the external system. This field is only valid for legacy named credentials. This field is deprecated in API version 56.0.

Usage

Use the NamedCredential object to query named credentials in your organization.

 **Note:** Some named credential fields rely on per-user authentication to connect with an external system. If an admin edits one of these fields, then the previously authenticated credentials can get invalidated, requiring individual users to reauthenticate.

SEE ALSO:

- [ExternalDataUserAuth](#)
- [ExternalDataSource](#)
- [Salesforce Help: Named Credentials](#)
- [Named Credentials Developer Guide: Get Started with Named Credentials](#)
- [Named Credentials Developer Guide: Named Credential API Links](#)
- [Apex Developer Guide: Invoking Callouts Using Apex](#)
- [Apex Developer Guide: Named Credentials as Callout Endpoints](#)

NamedCredentialEventLog

The Named Credential event type captures information about Apex callouts that use named credentials as their endpoints. Use this event type to audit the installed managed packages that use named credentials. If you don't recognize the package namespace in the named credential event log file, then you can investigate whether a security breach has occurred. This object is available in API version 65.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
BotIdentifier	Type String Description The ID of the bot.
BotSessionIdentifier	Type String Description The bot session ID.

Field	Details
CallerPackageNamespace	Type String Properties Filter, Group, Nillable, Sort Description If an Apex callout using a Named Credential endpoint is initiated from a package, then this field contains the package's namespace. If the callout isn't initiated from a package, then this field is empty.
ClientIp	Type String Properties Filter, Group, Nillable, Sort Description The IP address of the client that is using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP".
CpuTime	Type Double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
LoginKey	Type String Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.
NamedCredentialName	Type String Properties Filter, Group, Nillable, Sort Description The name of the named credential that's the endpoint of the Apex callout.
PlannerIdentifier	Type String

Field	Details
	Description The ID of the agent planner.
RequestIdIdentifier	Type String Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.
RunTime	Type Double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds..
SessionKey	Type String Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.
Timestamp	Type DateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT.
Uri	Type String Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request.
UserIdentifier	Type String

Field	Details
	Properties Filter, Group, Nillable, Sort
	Description The 15-character ID of the user who is using Salesforce services through the UI or the API.

NamespaceRegistry

Represents a namespace that you can link to scratch orgs that were created from your org's Dev Hub. You use the namespace when developing, packaging, and releasing an app. You can't create this object with the API. Use the **Link Namespace** action in the Dev Hub graphical interface to insert a `NamespaceRegistry` record. This object is available in API version 41.0 and later.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Fields

Field Name	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description The name of this namespace registry entry.
NamespaceOrg	Type string Properties Filter, Group, Nillable, Sort Description The org ID of the Developer Edition org where you've registered the namespace you want to link.
NamespacePrefix	Type string Properties Filter, Group, Sort Description The namespace prefix that you want to link to the scratch org.

Associated Objects

This object has these associated objects. Unless noted, they’re available in the same API version as this object.

NamespaceRegistryFeed

Feed tracking is available for the object.

NamespaceRegistryHistory

History is available for tracked fields of the object.

SEE ALSO:

[ActiveScratchOrg](#)

[ScratchOrgInfo](#)

NavigationLinkSet

Represents the navigation menu in an Experience Cloud site. A navigation menu consists of items that users can click to go to other parts of the site. This object is available in API version 35.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

`create()`, `delete()`, `update()`, and `upsert()` are available in API version 45.0 and later.

Special Access Rules

Navigation menus are available only in Experience Cloud sites created using Experience Builder templates. To use navigation menus in LWR templates, you must build a custom navigation menu component.

Fields

Field Name	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Create and Update are available in API version 45.0 and later. Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object’s name in a managed package and the changes are reflected in a subscriber’s organization.

Field Name	Details
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Create, Defaulted on create, Nillable, and Update are available in API version 45.0 and later. Description Language for the navigation menu. Valid values are: - Chinese (Simplified): zh_CN - Chinese (Traditional): zh_TW - Danish: da - Dutch: nl_NL - English: en_US - Finnish: fi - French: fr - German: de - Italian: it - Japanese: ja - Korean: ko - Norwegian: no - Portuguese (Brazil): pt_BR - Russian: ru - Spanish: es - Spanish (Mexico): es_MX Spanish (Mexico) defaults to Spanish for customer-defined translations. - Swedish: sv - Thai: th The Salesforce user interface is fully translated to Thai, but Help is in English.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Create and Update are available in API version 45.0 and later. Description Label for the navigation menu.
NetworkId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort Create is available in API version 45.0 and later. Update is available in API versions 45.0 to 47.0. Description ID of the Experience Cloud site.

NavigationMenuItem

Represents a single menu item in a NavigationLinkSet. Use this object to create, delete, or update menu items in your Experience Cloud site's navigation menu. This object is available in API version 35.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Navigation menus are available only in Experience Cloud sites created using Experience Builder templates. To use navigation menus in LWR templates, you must build a custom navigation menu component.

Fields

Field Name	Details
<code>AccessRestriction</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Determines if the menu item is available to guest users who aren't required to log in to the Experience Cloud site.
<code>DefaultListViewId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description If the value of the <code>Type</code> field is <code>SalesforceObject</code> , the value is the ID of the default list view for the object.

Field Name	Details
DraftRowID	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the draft navigation menu item. The ID is unique within your organization.
Label	Type string Properties Create, Filter, Group, Sort, Update Description The text that appears in the navigation menu for this item.
NavigationLinkSetId	Type reference Properties Create, Filter, Group, Sort, Update Description The navigation menu that this item is included in.
ParentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The parent navigation menu.
Position	Type int Properties Create, Filter, Group, Sort, Update Description The location of the menu item in the navigation menu.
Status	Type reference Properties Create, Filter, Group, Nillable, Sort

Field Name	Details
	Description Represents if the navigation menu item is published or not. The values can only be DRAFT, LIVE, or null. In API versions 42 and earlier, if the Status field is not set, the field defaults to LIVE. When queried and Status is not part of the query filter, only the NavigationMenuItem objects with a status of LIVE return. In API versions 43 and later, if the Status field is not set, the field defaults to DRAFT. When queried and Status is not part of the query filter, all NavigationMenuItem objects return regardless of status.
Target	Type string Properties Create, Filter, Group, Sort, Update Description If <code>Type</code> is ExternalLink or InternalLink, the target is the URL that the link points to. For ExternalLink, your entry looks like this: <code>https://salesforce.com</code>. For InternalLink, use a relative URL, such as <code>/contactsupport</code>.
TargetPrefs	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description If <code>Type</code> is ExternalLink, determines whether a navigation menu item opens in the same tab.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of navigation menu item. The available values are: • SalesforceObject—Available objects include accounts, cases, contacts, and custom objects. • ExternalLink—Links to a URL outside of your Experience Cloud site. For example, <code>https://salesforce.com</code>. • Event—An event, such as logging in, logging out, or switching accounts. Event is internal only and can't be used in custom components. • GlobalAction—Enables users to create object records, but the new record has no relationship with other records. • InternalLink—Links to a relative URL inside your Experience Cloud site. For example, <code>/contactsupport</code>.

Field Name	Details
	• NavigationalTopic—A dropdown list with links to the navigational topics in your Experience Cloud site. • SystemLink—A system link, such as a link to Experience Builder, Workspaces, or Salesforce setup.

Usage

You can add up to 20 navigation menu items. You can translate navigation menu items using the Translation Workbench.

NavigationMenuItemLocalization

Represents the translated value of a navigation menu item in an Experience Cloud site. This object is available in API version 36.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Navigation menus are available only in Experience Cloud sites created using Experience Builder templates. To use navigation menus in LWR templates, you must build a custom navigation menu component.

Fields

Field Name	Details
Language	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The language of the translated navigation menu item. The picklist contains the following supported languages: • Chinese (Simplified): zh_CN • Chinese (Traditional): zh_TW • Danish: da • Dutch: nl_NL • English: en_US • Finnish: fi

Field Name	Details
	• French: <code>fr</code> • German: <code>de</code> • Italian: <code>it</code> • Japanese: <code>ja</code> • Korean: <code>ko</code> • Norwegian: <code>no</code> • Portuguese (Brazil): <code>pt_BR</code> • Russian: <code>ru</code> • Spanish: <code>es</code> • Spanish (Mexico): <code>es_MX</code> Spanish (Mexico) defaults to Spanish for customer-defined translations. • Swedish: <code>sv</code> • Thai: <code>th</code> The Salesforce user interface is fully translated to Thai, but Help is in English.
<code>NamespacePrefix</code>	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
<code>ParentId</code>	Type reference Properties Create, Filter, Group, Sort Description The ID of the navigation menu item that this translated value applies to.

Field Name	Details
Value	Type string Properties Create, Filter, Sort, Update Description The translated text for the navigation menu item. Label is Translation Text .

Network

Represents an Experience Cloud site. Salesforce Experience Cloud lets you create branded spaces for your employees, customers, and partners. You can customize and create experiences, whether they're communities, sites, or portals, to meet your business needs, then transition seamlessly between them. Experience Cloud sites let you share information, records, and files with coworkers and stakeholders all in one place. This object is available in API version 26.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`, `update()`

Special Access Rules

This object is available only when your org has digital experiences enabled.

Fields

Field Name	Details
AllowedExtensions	Type textarea Properties Filter, Nillable, Sort, Update Description Specifies the types of files allowed in your site. This list of file types lets you control what members upload and also prevents spammers from polluting your site with inappropriate files. Available in API version 36.0 and later. Separate file types with a comma (for example: <i>jpg, docx, txt</i>). You can enter lowercase and uppercase letters. You can enter up to 1,000 characters. To allow all file types, leave this field empty.
CaseCommentEmailTemplateId	Type reference

Field Name	Details
	Properties Filter, Group, Nillable, Sort, Update Description ID of the email template used when submitting a comment on a case. This field is available in API version 28.0 and later.
ChangePasswordEmailTemplateId	Type reference Properties Filter, Group, Sort, Update Description ID of the email template used when notifying users that their password has been reset.
ChgEmailVerNewEmailTemplateId	Type reference Properties Filter, Group, Nillable, Sort, Update Description ID of the email template used when notifying users that their email address has been changed. This email is sent to the user's new email address.
ChgEmailVerOldEmailTemplateId	Type reference Properties Filter, Group, Nillable, Sort, Update Description ID of the email template used when notifying users that their email address has been changed. This email is sent to the user's old email address.
Description	Type string Properties Filter, Group, Nillable, Sort, Update Description Description of the site.
DeviceActEmailTemplateId	Type reference Properties Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description ID of the email template used when users log in from an unrecognized browser, app, or IP address. The email contains a one-time password that users enter to verify their identity. This field is available in API version 53.0 and later.
EmailFooterLogoId	Type reference Properties Filter, Group, Nillable, Sort, Update Description ID of the Document object that displays as an image in the footer of Chatter emails.
EmailFooterText	Type string Properties Filter, Nillable, Sort, Update Description Text that displays in the footer of Chatter emails.
EmailSenderAddress	Type email Properties Filter, Group, Sort Description Read only. Email address from which emails are sent.  Note: To change the EmailSenderAddress value, you must first specify NewSenderAddress, which triggers the sending of an address change verification email. After you complete the address verification process, EmailSenderAddress changes to the specified NewSenderAddress.
EmailSenderName	Type string Properties Filter, Group, Sort, Update Description Name from which emails are sent.
enableImageOptimizationCDN	Type boolean

Field Name	Details
	Properties Filter, Update Description The setting that optimizes cached images for guest users on all devices when a site uses Salesforce's CDN for Digital Experiences. This field is available in API version 56.0 and later.
FirstActivationDate	Type date Properties Filter, Group, Nillable, Sort Description The date the site was first activated. This field is available in API version 34.0 and later. If the site was activated or inactive before the release of API version 34.0, this field returns the date that the site was first created.
ForgotPasswordEmailTemplateId	Type reference Properties Filter, Group, Sort, Update Description ID of the email template used when users forget their password.
HeadlessForgotPasswordTemplateId	Type reference Properties Filter, Group, Nillable, Sort, Update Description ID of the email template to use with the Headless Forgot Password Flow. This field is available in API version 57.0 and later.
HeadlessRegistrationTemplateId	Type reference Properties Filter, Group, Nillable, Sort, Update Description ID of the email template to use for identity verification during the Headless Registration Flow. This field is available in API version 59.0 and later.

Field Name	Details
LockoutEmailTemplateId	Type reference Properties Filter, Group, Nillable, Sort, Update Description ID of the email template used when users try to reset their password after locking themselves out because of too many login attempts. This field is available in API version 43.0 and later.
MaxFileSizeKb	Type int Properties Filter, Group, Nillable, Sort, Update Description Specifies the maximum file size (in KBs) that members can upload in your site. Available in API version 36.0 and later. Enter a number between 3072 KB and your org's maximum file size. To use the default limit of 2 GB, leave this field empty.
Name	Type string Properties Filter, Group, idLookup, Sort, Update Description The name of the site.
NewSenderAddress	Type email Properties Filter, Group, Nillable, Sort, Update Description Email address that has been entered as the new value for <code>EmailSenderAddress</code> but hasn't been verified yet. After a user has requested to change the sender email address and has successfully responded to the verification email, the <code>NewSenderAddress</code> value overwrites the value in <code>EmailSenderAddress</code>. This value becomes the email address from which emails are sent.  Note: • If verification is pending for a new email address and you set <code>NewSenderAddress</code> to null, the verification request is canceled.

Field Name	Details
	• <code>NewSenderAddress</code> is automatically set to null after <code>EmailSenderAddress</code> has been set to the new verified address. • If verification is pending for a new email address, and you specify a different new address for this field, only the latest value is retained and used for verification.
<code>OptionsActionOverrideEnabled</code>	Type boolean Properties Filter, Update Description Override the action that occurs when users click a default button, like New or Edit, with a Lightning component. For example, show a custom window instead of the one that Salesforce provides. Assign action overrides in the Object Manager. In the UI, this setting is available in the Administration Workspace, under Administration > Preferences under Experience Management This field is available in API version 49.0 and later.
<code>OptionsAllowInternalUserLogin</code>	Type boolean Properties Filter, Update Description Specifies whether internal users can log in with their internal credentials on the site login page. This field is available in API version 37.0 and later.
<code>OptionsAllowMembersToFlag</code>	Type boolean Properties Filter, Update Description Determines whether users can flag posts, comments, or files as inappropriate. This field is available in API version 29.0 and later. The ability to flag files is available in version 30.0 and later.
<code>OptionsApexCDNCachingEnabled</code>	Type boolean Properties Filter, Update

Field Name	Details
	Description Determines whether public data from @wire calls to Apex methods is cached only for guest users. This setting applies only to sites using Salesforce's CDN for Digital Experiences. This field is available in API version 55.0 and later.
OptionsDirectMessagesEnabled	Type boolean Properties Filter, Update Description Controls the availability of direct messages in an Experience Builder site. This field is available in API version 39.0 and later.
OptionsEmbeddedLoginEnabled	Type boolean Properties Filter, Update Description Determines whether the Embedded Login feature is enabled in a site. When <code>true</code>, Embedded Login is turned on. This field is available in API version 61.0 and later.
OptionsEnableTalkingAboutStats	Type boolean Properties Filter, Update Description Determines whether site users see how many people are discussing a topic. The number of people discussing the topic appears as the user types the topic and the system gives topic suggestions. This field is available in API version 41.0 and later.
OptionsEnableTopicAssignmentRules	Type boolean Properties Filter, Update Description When true, displays knowledgeable people in key areas, for example, on Topic Detail pages.

Field Name	Details
OptionsExpFriendlyUrlsAsDefault	Type boolean Properties Filter, Update Description When true, URL slugs are on by default for - Product and Category pages of LWR Commerce stores (available in API version 58.0 and later) - Custom object pages on enhanced LWR sites (available in API version 60.0 and later) - Account and contact pages on enhanced LWR sites (available in API version 61.0 and later)
OptionsExperienceBundleBasedSnsOverrideEnabled	Type boolean Properties Filter, Update Description When true, the Service Not Available Page is an auto-generated Experience Builder-based page. When false, the Service Not Available page uses a static resource page that is set in Workspaces > Administration > Pages. The default value is true. Available in API version 52.0 and later.
OptionsGatherCustomerSentimentData	Type boolean Properties Filter, Update Description When true, collects data about user likes, upvotes, and downvotes.
OptionsGuestChatterEnabled	Type boolean Properties Filter, Update Description Specifies whether guest users can access public Chatter groups in the site without logging in.
OptionsGuestFileAccessEnabled	Type boolean Properties Filter, Update

Field Name	Details
	Description When true, lets guest users view asset files and CMS content that's available to the site. Guest users can access shared asset files and published CMS content that's made for external use, even if it isn't used. Shared asset files include images that are associated with topics, recognition badges, branding, and account branding. This preference is automatically enabled if public access is enabled at the page or site level in Experience Builder.
OptionsGuestMemberVisibility	Type boolean Properties Filter, Update Description When true, lets guest users see who else is part of the site, including non-guest users. In the UI, this setting appears in the Administration Workspace under Administration > Preferences. Available in API version 47.0 and later.
OptionsHeadlessFrgtPswEnabled	Type boolean Properties Filter, Update Description When <code>true</code>, Headless Forgot Password Flow is enabled. This field is available in API version 57.0 and later.
OptionsImageOptimizationCDNEnabled	Type boolean Properties Filter, Update Description When <code>true</code>, cached images are optimized to suit any device that guest users use to access your site. This feature is available only for sites that use Salesforce's CDN for Digital Experiences. In the UI, this setting appears in the Administration Workspace under Administration > Preferences. Available in API version 56.0 and later.
OptionsInvitationsEnabled	Type boolean Properties Filter, Update

Field Name	Details
	Description Determines whether users can invite others to the site.
OptionsKnowledgeableEnabled	Type boolean Properties Filter, Update Description Determines whether users can see knowledgeable people for topics and endorse people for topics.
OptionsLWRExperienceConnectedAppEnabled	Type boolean Properties Filter, Update Description When true, enhances the performance and scalability of Connect API calls made from Lightning web components in an enhanced LWR site. This field is available in API version 58.0 and later.  Note: This feature is a Beta Service. Customer may opt to try such Beta Service in its sole discretion. Any use of the Beta Service is subject to the applicable Beta Services Terms provided at Agreements and Terms .
OptionsMemberVisibility	Type boolean Properties Filter, Update Description Controls user visibility on a per-site basis. If true, the See other members of this site preference is enabled for the selected site. This field is available in API version 45.0 and later.
OptionsMobileImageOptimizationEnabled	Type boolean Properties Filter, Update Description If true, file asset images are optimized for mobile display. This field is available in API version 45.0 and later.
OptionsNetworkSentimentAnalysis	Type boolean

Field Name	Details
	Properties Filter, Update Description If true, enables sentiment analysis in a site. In the UI, this setting is available in the Administration Workspace, under Administration > Preferences. This field is available in API version 40.0 and later.
OptionsNicknameDisplayEnabled	Type boolean Properties Filter, Update Description Determines whether user nicknames display instead of their first and last names in most places in the site. A few restrictions to keep in mind about nickname display: - Records and user lookups on records show full names. Keep in mind, though, that you can control record and user visibility with sharing rules. - Mobile notifications in the Salesforce mobile app show full names. You can turn off mobile notifications in the app to avoid this display. - Searches by first, last, and full names aren't restricted and return matches, but the search results display only nicknames. Global search auto-complete recommendations show any first, last, and full names that the user has searched by or accessed via a record or another location. The recent items list also shows first, last, and full under the same conditions.
OptionsPrivateMessagesEnabled	Type boolean Properties Filter, Update Description Determines whether users can send and receive Chatter messages in the site.
OptionsProfileBasedLayoutsForKnowledgeSearchEnabled	Type boolean Properties Filter, Update Description When true, provides a grid layout for Knowledge search results. With grid layout in place, you can edit search profile layouts on the Knowledge object to show and hide different search result fields for different profiles. When you enable the standard grid layout, search-term highlighting isn't available. This field is available in API version 51.0 and later.

Field Name	Details
OptionsRecognitionBadgingEnabled	Type boolean Properties Filter, Update Description Determines whether Recognition Badges is enabled for the site.
OptionsReputationEnabled	Type boolean Properties Filter, Update Description Determines if reputation is calculated and displayed for members. This field is available in API version 31.0 and later.
OptionsReputationRecordConversationsDisabled	Type boolean Properties Filter, Update Description Disables the feed on reputation records.
OptionsSelfRegistrationEnabled	Type boolean Properties Filter, Update Description Determines whether customers and partners can self-register to join the site. Customers and partners are users with External Identity, Community, Customer Portal, or partner portal licenses. If <code>true</code>, displays a Not a member? link on the login page that points to the default self-registration page. This field is available in API version 28.0 and later.
OptionsSendWelcomeEmail	Type boolean Properties Filter, Update Description Determines whether a welcome email is sent when a new user is added to the site.

Field Name	Details
OptionsShowAllNetworkSettings	Type boolean Properties Filter, Update Description Determines whether settings in Experience Management that were hidden based on how you set up your site are visible or remain hidden. This field is available in API version 33.0 and later.
OptionsSiteAsContainerEnabled	Type boolean Properties Filter, Update Description Determines whether the site is an Experience Builder site (true) or a Salesforce Tabs + Visualforce site (false). This field is available in API version 29.0 and later.
OptionsThreadedDiscussionsEnabled	Type boolean Properties Filter, Update Description Indicates whether threaded discussions are enabled for the site. Available in API version 44.0 and later.
OptionsTopicFilteringForKnowledgeSearchEnabled	Type boolean Properties Filter, Update Description Determines whether topic filtering is enabled for Knowledge search. This field is available in API version 55.0 and later.
OptionsTopicSuggestionsEnabled	Type boolean Properties Filter, Update Description Enables topic suggestions when users write posts. This field is available in API version 41.0 and later.

Field Name	Details
OptionsUpDownVoteEnabled	Type boolean Properties Filter, Update Description Determines whether up and down voting is enabled for the site. This field is available in API version 41.0 and later.
PwdlessRegEmailTemplateId	Type reference Properties Filter, Group, Nillable, Sort, Update Description ID of the email template for the welcome email that users receive when they sign up with passwordless registration. This field is available in API version 61.0 and later.
SelfRegMicroBatchSubErrorEmailTemplateId	Type reference Properties Filter, Group, Nillable, Sort, Update Description ID of the profile assigned to users who self-register using micro-batching. Only applies if self-registration using micro-batching is enabled for the site. This field is available in API version 54.0 and later.
SelfRegProfileId	Type reference Properties Filter, Group, Nillable, Sort, Update Description ID of the profile assigned to users who self-register. Only applies if self-registration is enabled for the site. This field is available in API version 29.0 and later.
Status	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Status of the site. Available values are:

Field Name	Details
	• Live—The site is online and members can access it. Label is <code>Published</code>. • DownForMaintenance—The site was previously published, but was taken offline. Members with the Create and Set Up Experiences permission can still access the setup for offline sites regardless of profile or membership. Members aren't able to access offline sites, but they still appear in the user interface dropdown menu as <code>SiteName (Offline)</code>. Label is <code>Offline</code>. • UnderConstruction—The site hasn't yet been published. When a user's profile is associated with the site, and they've Create and Set Up Experiences permission, they can access sites in this status. After a site is published, it can never be in this status again. Label is <code>Preview</code>.
<code>UrlPathPrefix</code>	Type string Properties Filter, Group, Nillable, Sort, Update Description The <code>UrlPathPrefix</code> is a unique string at the end of the URL for the site. For example, in the site URL <code>MyDomainName.my.site.com/customers</code>, <code>customers</code> is the <code>UrlPathPrefix</code>.
<code>VerificationEmailTemplateId</code>	Type reference Properties Filter, Group, Nillable, Sort, Update Description ID of the email template used when users must verify their identity, for example, when they log in without a password. This field is available in API version 44.0 and later.
<code>WelcomeEmailTemplateId</code>	Type reference Properties Filter, Group, Sort, Update Description ID of the email template used when sending welcome emails to new members.

Usage

Use this object to find, view, and update sites in your org. If you're assigned the Modify All Data, View All Data, or Create and Set Up Experiences permission, you can view all sites in the org. Users without these permissions see only the Preview or Published sites that they're members of. If you're assigned the Create and Set Up Experiences permission, you can customize site settings.

SEE ALSO:
[WebStoreNetwork](#)

NetworkActivityAudit

Represents an audit trail of moderation actions in Experience Cloud sites. This object is available in API version 30.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available only when your org has digital experiences enabled.

Fields

Field Name	Details
Action	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The moderation action a member performed on a post, comment, or file in an Experience Cloud site. Values are: - Flagged as Inappropriate—A member flagged a post, comment, or file as inappropriate. - Flagged as Spam - A member flagged a post, comment, or file as spam. - Unflagged—A member removed the flag from a post, comment, or file. - RemovedFlags—A moderator removed all flags from a post, comment, or file. - DeletedFlaggedItem—A moderator deleted a flagged post, comment, message, or file.

Field Name	Details
	- DeletedPendingReviewItem—A moderator deleted a post or comment with pending status. - ModerationRuleFlag—A moderation rule flagged member-generated content. - ModerationRuleBlock—A moderation rule blocked member-generated content. - ModerationRuleReplace—A moderation rule replaced member-generated content. - ModerationRuleReview—A moderation rule sent member-generated content to be reviewed and approved by a moderator. - ModerationRuleFreeze—A moderation rule froze a member because they created content too frequently within a specific time frame. - ModerationRuleNotify—A moderation rule notified moderators because a member created content too frequently within a specific time frame.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Notes entered by the user. If the entity being tracked is a file, records the version number of the file when it was flagged.
EntityCreatedById	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the user that created the entity being tracked.
EntityId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the entity that is being tracked. The following entities are tracked: ChatterMessage, ContentDocument, ContentVersion, FeedComment, and FeedItem.
EntityType	Type picklist

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The key prefix of the entity being tracked.
Name	Type string Properties Create, Filter, Group, Sort, Update Description The ID of the item being tracked.
NetworkId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the Experience Cloud site where the moderation action was performed.
ParentEntityId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the parent of the entity on which an action was performed.
ParentEntityType	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The key prefix of the parent of the entity being audited.

Usage

Use this object to view an audit trail of moderation activity for your Experience Cloud sites. You must have the Modify All Data permission to access this object.

Users with Moderate Experiences Feeds, Moderate Experiences Files, or View All Data can view the audit trail using reports in the Salesforce user interface.

NetworkAffinity

Represents a junction object that associates a user profile with a Network object, that is, with an Experience Cloud site. Use NetworkAffinity to assign a default Experience Cloud site to a user profile. This object is available in API version 41.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To work with the NetworkAffinity object, you must have View Setup or Customize Application permission.

Fields

Field Name	Details
NetworkId	Type reference Properties Create, Filter, Group, Sort Description The ID of the default Experience Cloud site associated with a user profile.
ProfileId	Type reference Properties CreateFilter, Group, Sort, Update Description ID of the user profile the default Experience Cloud site is assigned to.

Usage

The default Experience Cloud site allows you to stamp site-agnostic email notifications to all users with that profile with the selected site's branding. The default Experience Cloud site also becomes the target destination for email notification links. Site-agnostic email notifications include notifications about records, such as cases, accounts, and opportunities.

The `NetworkId` field is not updatable through the Apex, REST API, or SOAP API. If you want to change the value for `NetworkId`, you must delete the record and create one with the right value.

NetworkAuthApiSettings

Represents the settings that control enablement, access, and security for the Headless Registration Flow, Headless Forgot Password Flow, Headless Passwordless Login Flow, and their associated APIs. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Headless identity features are set up via Experience Cloud sites. You must have an Experience Cloud site to access Headless Identity APIs and store users, even if users never interact with the site directly.

Fields

Field	Details
<code>CustomOtpDeliveryHandlerId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description This field is a relationship field. The ID of a custom one-time password (OTP) delivery handler that implements the <code>Auth.CustomOneTimePasswordDeliveryHandler</code> interface.
<code>DoesForgotPasswordRequireAuth</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether authentication is required to access Headless Forgot Password API when a password reset is requested. If <code>true</code>, an access token issued to an internal integration user in your initial POST request to the <code>/services/auth/headless/forgot_password</code> endpoint is required. The access token must include the <code>forgot_password</code> scope. The default value is <code>false</code>.
<code>DoesPasswordLoginRequireAuth</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether reCAPTCHA is required for headless username-password login that uses the OAuth 2.0 for First-Party Applications draft protocol.
<code>DoesPwdlessLoginRequireAuth</code>	Type boolean

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether authentication is required to access Headless Passwordless Login API when user information is submitted to Salesforce. If <code>true</code>, an access token issued to an internal integration user is required in your initial POST request to the <code>/services/auth/headless/init/passwordless/login</code> endpoint. The access token must include the <code>pwdless_login_api</code> scope. The default value is <code>false</code>. This field is available in API version 59.0 and later.
DoesRegistrationRequireAuth	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether authentication is required to access Headless Registration API when user registration information is submitted to Salesforce. If <code>true</code>, an access token issued to an internal integration user in your initial POST request to the <code>/services/auth/headless/init/registration</code> endpoint is required. The access token must include the <code>user_registration_api</code> scope. The default value is <code>false</code>.
HeadlessDiscoveryExecutionUserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description This field is a relationship field. The ID of an integration user account to run a headless user discovery Apex handler. Relationship Name HeadlessDiscoveryExecutionUser Refers To User
HeadlessDiscoveryHandlerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description This field is a relationship field. The ID of an Apex class that implements the <code>Auth.HeadlessUserDiscoveryHandler</code> interface.

Field	Details
	Relationship Name HeadlessDiscoveryHandler Refers To ApexClass
isFirstPartyAppsAllowed	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether the Experience Cloud site can use headless identity flows that use the OAuth 2.0 for First-Party Applications draft protocol.
IsForgotPwdAllowed	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether the Headless Forgot Password Flow is enabled. The default value is <code>false</code>.
IsForgotPwdEmailTemplateAllowlistingEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Descriptions Determines whether email template allowlisting is enabled for the Headless Registration Flow, Headless Passwordless Login Flow, and Headless Forgot Password Flow. If <code>true</code>, the initial request to the headless API must include an <code>emailTemplate</code> parameter that contains only allowlisted email templates. The default value is <code>false</code>.
IsHeadlessUserRegistrationAllowed	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether the Headless Registration Flow is enabled. The default value is <code>false</code>.

Field	Details
IsPwdlessLoginAllowed	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether the Headless Passwordless Login Flow is enabled (<code>true</code>) or not (<code>false</code>). The flow is disabled by default. This field is available in API version 59.0 and later.
IsRecaptchaRequiredForgotPwd	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether a reCAPTCHA token is required to access Headless Forgot Password API when a password reset is requested. If <code>true</code>, a reCAPTCHA token is required in your initial POST request to the <code>/services/auth/headless/forgot_password</code> endpoint. The default value is <code>false</code>.
IsRecaptchaRequiredPwdlessLogin	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether a reCAPTCHA token is required to access Headless Passwordless Login API when user information is submitted to Salesforce. If <code>true</code>, a reCAPTCHA token is required in your initial POST request to the <code>/services/auth/headless/init/passwordless/login</code> endpoint. By default, a reCAPTCHA token isn't required (<code>false</code>). This field is available in API version 59.0 and later.
IsRecaptchaRequiredRgstr	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether a reCAPTCHA token is required to access Headless Registration API when user registration information is submitted to Salesforce. If <code>true</code>, a reCAPTCHA token is required in your initial POST request to the <code>/services/auth/headless/init/registration</code> endpoint. The default value is <code>false</code>.

Field	Details
IsUniversalClientRgstrAllowed	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether self-registration and passwordless login via Universal Registration API are enabled. The default value is <code>false</code>.
IsUserDisambiguationAllowedForgotPwd	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether the Headless Forgot Password Flow uses the headless user discovery Apex handler that's specified in the <code>HeadlessDiscoveryHandlerId</code> field. The handler enables users to reset their password with an identifier other than their username, such as an email address, phone number, or order number. The default value is <code>false</code>.
IsUserDisambiguationAllowedUsernamePwd	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether headless login flows use the headless user discovery Apex handler that's specified in the <code>HeadlessDiscoveryHandlerId</code> field. The handler enables users to log in with an identifier other than their username, such as an email address, phone number, or order number. This field applies to the Authorization Code and Credentials Flow and the OAuth 2.0 for First-Party Applications login flow. The default value is <code>false</code>.
MaxPasswordResetAttempts	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The maximum number of password reset attempts you allow for the Headless Forgot Password Flow before the user must request a new one-time password (OTP).
NetworkId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort Description The ID of your Experience Cloud site. This ID is unique within your org. This field is a relationship field. Relationship Name Network Relationship Type Lookup Refers To Network
RecaptchaScoreThreshold	Type double Properties Create, Filter, Nillable, Sort, Update Description The lowest reCAPTCHA score that is accepted before rejecting a request to access Headless Identity APIs. This value must be between 0.5 and 1. Scores closer to 0.5 are more likely to be bots, while scores closer to 1 are more likely to be valid users. You must set a score threshold if <code>DoesForgotPasswordRequireAuth</code> or <code>DoesRegistrationRequireAuth</code> fields are set to <code>true</code>. reCAPTCHA settings apply to both the Headless Registration Flow and the Headless Forgot Password Flow. Google issues a reCAPTCHA score only for reCAPTCHA v3 implementations. If you implement reCAPTCHA v2, this field doesn't apply.
RecaptchaSecretKey	Type encryptedstring Properties Create, Nillable, Update Description The reCAPTCHA secret key from your API key pair. You get the API key pair from Google when you set up reCAPTCHA. The secret key helps your app securely communicate with Google. You must enter a secret key if <code>DoesForgotPasswordRequireAuth</code> or <code>DoesRegistrationRequireAuth</code> are set to <code>true</code>. reCAPTCHA settings apply to both the Headless Registration Flow and the Headless Forgot Password Flow.
RegistrationExecutionUserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The ID of the user who runs your headless registration Apex handler. This field is a relationship field. Relationship Name RegistrationExecutionUser Relationship Type Lookup Refers To User
RegistrationHandlerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of your headless registration Apex handler. This field is a relationship field. Relationship Name RegistrationHandler Relationship Type Lookup Refers To ApexClass
RegistrationUserDefaultProfileId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the default profile that gets assigned to new users when they register. This field is a relationship field. Relationship Name RegistrationUserDefaultProfile Relationship Type Lookup Refers To Profile

NetworkDataCategory

Represents data categories in Lightning Web Runtime (LWR) Experience Cloud Sites. This object is available in API version 59.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

This object is available only when your org has Digital Experiences and Knowledge or Service Catalog enabled.

Fields

Field	Details
DataCategoryGroupName	Type string Properties Filter, Group, Nillable, Sort Description Name of the data category group that contains one or more data categories.
DataCategoryName	Type string Properties Filter, Group, Nillable, Sort Description Name of the data category.
Description	Type textarea Properties Nillable Description Description of the data category.
ImageId	Type reference Properties Filter, Group, Nillable, Sort Description Image associated with the data category.

Field	Details
	This field is a relationship field. Relationship Name Image Relationship Type Lookup Refers To ManagedContent
Label	Type string Properties Filter, Group, Sort Description The name of the data category shown in the UI.
NetworkId	Type reference Properties Filter, Group, Sort Description ID of the associated Experience site. This field is a relationship field. Relationship Name Network Relationship Type Lookup Refers To Network

NetworkDiscoverableLogin

Represents the Login Discoverable page from where customers and partners log in to an Experience Cloud site. Customers and partners are users with an External Identity license or any communities license for Experience Cloud. This object is available in API version 44.0 and later.

Supported Calls

`create()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
ApexHandlerId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the Apex handler created by the Login Discovery page type.
ExecuteApexHandlerAsId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the user who is executing the handler.
NetworkId	Type reference Properties Create, Filter, Group, Sort, Update Unique Description The ID of <code>NetworkId</code> is unique within your org.
UsernameLabel	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Log in prompt on login page when the login page type is Login Discovery.

Usage

Use this object to access the Login Discovery Page, which is a login page type that prompts users to identify themselves with an email address, phone number, or custom identifier. DiscoverableLogin performs an interview-based login process, where users are first prompted to provide identity and then authenticated. For example, users receive a verification code that they enter to complete the login process.



Note: The NetworkDiscoverableLogin object is created when **Login Discovery Page** is selected as the login page type on the Login & Registration (L&R) page. If you later switch to another login page type, such as a Visualforce Page or Experience Builder Page, the object isn't deleted. The object persistence means you can't delete the Apex class associated with the

NetworkDiscoverableLogin object. To delete the Apex class, return to the L&R page and change the login page type back to **Login Discovery page**. Select another Apex class, and then you can delete the first one.

NetworkEmailTmplAllowlist

Represents an allowlist for the one-time password (OTP) email templates that are sent to end users during the Headless Registration Flow, the Headless Passwordless Login Flow, and the Headless Forgot Password Flow. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
EmailTemplateId	Type reference Properties Create, Filter, Group, Sort, Update Description The IDs of the allowlisted email templates that can be sent to users during the headless authorization flows for registration, passwordless login, and forgot password. You can list multiple template IDs. When your app sends its initial request to Headless Registration API or Headless Passwordless Login API, the <code>emailtemplate</code> parameter can include only an email template ID from the allowlist. For Headless Forgot Password API, it works the same way, but only if email template allowlisting is enabled. This field is a relationship field. Relationship Name EmailTemplate Relationship Type Lookup Refers To EmailTemplate
NetworkId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the Experience Cloud site for which the allowlist is being configured. This field is a relationship field.

Field	Details
	Relationship Name Network
	Relationship Type Lookup
	Refers To Network

NetworkFeedResponseMetric

Represents an object that stores the date and time values of question posts. It captures information for question creation, answer creation, and when an answer is marked as best answer This object is available in API version 51.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

The NetworkFeedResponseMetric object is available only if both NetworksEnabled and ChatterEnabled org preferences are enabled.

Fields

Field	Details
BestCommentDateTime	Type dateTime Properties Filter, Nillable, Sort Description Represents the date and time a user created an answer that was later marked as best answer.
BestCommentId	Type reference Properties Filter, Group, Nillable, Sort Description Represents the comment that was marked as the best answer.
FeedItemCreatedById	Type reference

Field	Details
	Properties Filter, Group, Sort Description Represents the user who created the feed item.
FeedItemDateTime	Type dateTime Properties Filter, Sort Description Represents the date and time when the feed Item was created.
FeedItemId	Type reference Properties Filter, Group, Sort Description Represents the unique ID of the question post.
FirstCommentDateTime	Type dateTime Properties Filter, Nillable, Sort Description Represents the date and time when the first comment was created.
FirstCommentId	Type reference Properties Filter, Group, Nillable, Sort Description Represent the first comment on a feed Item.
MarkedAsBestCommentDateTime	Type dateTime Properties Filter, Nillable, Sort Description Represents the date and time the user marked the answer as best answer.
NetworkId	Type reference

Field	Details
	Properties Filter, Group, Sort Description Represents where the feed item was created.
ParentRecordId	Type reference Properties Filter, Group, Sort Description Represents the parent record. Parent records can include records like user, account, or group.

NetworkMember

Represents a member of an Experience Cloud site. Members can be either users in your company or external users with portal profiles. This object is available in API version 26.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`, `update()`

Special Access Rules

This object is available only when your org has digital experiences enabled.

Fields

Field Name	Details
DefaultGroupNotificationFrequency	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Required. The default frequency for sending the member's group email notifications when the member joins groups in the Experience Cloud site. The valid values are: • <code>P</code>—Email on every post • <code>D</code>—Daily digests • <code>W</code>—Weekly digests

Field Name	Details
	• N—Never The default value is W. In sites, the Email on every post option is disabled once more than 10,000 members choose this setting for the group. All members who had this option selected are automatically switched to Daily digests. However, this field is not currently enabled. These values are reserved for future use.
DigestFrequency	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Required. The frequency for sending the member's personal email digest for the Experience Cloud site. The valid values are: • D—Daily • W—Weekly • N—Never The default value is D. However, daily and weekly personal digests aren't currently available in sites. These values are reserved for future use.
LastChatterActivityDate	Type date Properties Filter, Group, Nillable, Sort Description The last time the member posted or commented in the Experience Cloud site.
MemberId	Type reference Properties Filter, Group, Sort Description The ID of a person who is a member of an Experience Cloud site.
NetworkId	Type reference Properties Filter, Group, Sort Description The ID of the Experience Cloud site that the member is part of.

Field Name	Details
PreferencesDisableAllFeedsEmail	Type boolean Properties Filter, Update Description When <code>false</code>, the member can automatically receive email for updates in the Experience Cloud site, based on the types of feed emails and digests the member has enabled.
PreferencesDisableBestAnswerEmail	Type boolean Properties Filter, Update Description When <code>false</code>, the member automatically receives email when someone selects their answer to a post as best. Available in API 46.0 and later.
PreferencesDisableBookmarkEmail	Type boolean Properties Filter, Update Description When <code>false</code>, the member automatically receives email every time someone comments on a feed item after the member has bookmarked it.
PreferencesDisableChangeCommentEmail	Type boolean Properties Filter, Update Description When <code>false</code>, the member automatically receives email every time someone comments on a change the member has made, such as an update to their profile.
PreferencesDisableDirectMessageEmail	Type boolean Properties Filter, Update

Field Name	Details
	Description When <code>false</code> , the member automatically receives email every time someone sends them a direct message in the Experience Cloud site.
<code>PreferencesDisableEndorsementEmail</code>	Type boolean Properties Filter, Update Description When <code>false</code> , the member automatically receives email every time someone endorses them for a topic.
<code>PreferencesDisableFollowersEmail</code>	Type boolean Properties Filter, Update Description When <code>false</code> , the member automatically receives email every time someone in the Experience Cloud site starts following the member.
<code>PreferencesDisableItemFlaggedEmail</code>	Type boolean Properties Filter, Update Description When <code>false</code> , the user automatically receives email every time a member flags a post or comment. This setting only applies for community moderators (with the Moderate Experiences Feeds permission) and group owners or managers. This field is available in API version 29.0 and later.
<code>PreferencesDisableLaterCommentEmail</code>	Type boolean Properties Filter, Update Description When <code>false</code> , the member automatically receives email every time someone comments on a feed item after the member has commented on the feed item.
<code>PreferencesDisableLikeEmail</code>	Type boolean

Field Name	Details
	Properties Filter, Update Description When <code>false</code>, the member automatically receives email every time someone comments on a feed item after the member has liked the feed item.
PreferencesDisableMarketingCloudEmail	Type boolean Properties Filter, Update Description When <code>false</code>, the member automatically receives marketing emails sent by Journey Builder. Available in API version 41.0 and later.
PreferencesDisableMentionsPostEmail	Type boolean Properties Filter, Update Description When <code>false</code>, the member automatically receives email every time the member is mentioned in posts.
PreferencesDisableMessageEmail	Type boolean Properties Filter, Update Description When <code>false</code>, the member automatically receives email every time the member is sent a Chatter message.
PreferencesDisableProfilePostEmail	Type boolean Properties Filter, Update Description When <code>false</code>, the member automatically receives email every time someone posts to the member's profile.
PreferencesDisableSharePostEmail	Type boolean

Field Name	Details
	Properties Filter, Update Description When <code>false</code> , the member automatically receives email every time the member's post is shared.
PreferencesDisCommentAfterLikeEmail	Type boolean Properties Filter, Update Description When <code>false</code> , the member automatically receives email every time someone comments on a post the member has liked.
PreferencesDisMentionsCommentEmail	Type boolean Properties Filter, Update Description When <code>false</code> , the member automatically receives email every time the member is mentioned in comments.
PreferencesDisProfPostCommentEmail	Type boolean Properties Filter, Update Description When <code>false</code> , the member automatically receives email every time someone comments on posts on the member's profile.
ReputationPoints	Type double Properties Filter, Sort, Update Description The number of reputation points the user has accumulated by performing actions in the Experience Cloud site.

Usage

Use this object to query members of a certain Experience Cloud site and to update their email notification settings. If you have Modify All Data, View All Data, or Create and Set Up Experiences, you can view all members of any Experience Cloud site, regardless of your own

membership. If you have Modify All Data or Create and Set Up Experiences, you can also update any member’s email settings. Users without these permissions can update their own email settings and can see members of the Experience Cloud sites that they’re also members of.

You can directly update reputation points for a member via the Salesforce API. You can also use Apex triggers to send custom notifications based on changes to reputation points.

NetworkMemberGroup

Represents a group of members in an Experience Cloud site. Members can be either users in your internal org or external users assigned portal profiles. An administrator adds members to an Experience Cloud site by adding a profile or a permission set, and any user with the profile or permission set becomes a member of the site. This object is available in API version 26.0 and later.

 **Note:** If a Chatter customer (from a customer group) is assigned a permission set that is also associated with an Experience Cloud site, the Chatter customer won’t be added to the site.

Prior to API version 27.0, this object was called NetworkProfile.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`

 **Note:** The `upsert()` call is not supported for this object.

Special Access Rules

This object is available only when your org has digital experiences enabled.

Fields

Field Name	Details
AssignmentStatus	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The status of a profile or permission set within an Experience Cloud site. Values are: • <code>Add Calculated</code>—The number of users that need to be added are calculated and the add operation is in progress. • <code>Added</code>—Users with this profile or permission set are members. • <code>Failed Add</code>—Users with this profile or permission set were not successfully made members. • <code>Failed Remove</code>—Users with this profile or permission set were not successfully removed from membership.

Field Name	Details
	- Remove Calculated—The number of users that need to be removed are calculated and the remove operation is in progress. - Waiting for Add—The profile or permission set was added to the Experience Cloud site, but the async process hasn't completed yet. After the process is complete, the status is updated to Added. - Waiting for Remove—Use this status to remove all the members belonging to a profile or permission set and remove a profile or permission set from an Experience Cloud site.
NetworkId	Type reference Properties Create, Filter, Group, Sort Description The ID of the Experience Cloud site that this group of members is associated with.
ParentId	Type reference Properties Create, Filter, Group, Sort Description The ID of the profile or permission set associated with the Experience Cloud site.

Usage

Use this object to view the profiles or permission sets associated with a particular Experience Cloud site. Profiles and permission sets are added and removed asynchronously, so you can also check the status of a profile or permission set that was updated in a site.

If you have Modify All Data, View All Data, or Create and Set Up Experiences, you can view all profiles or permission sets for any Experience Cloud site in the org, regardless of your membership. If you have Modify All Data or Create and Set Up Experiences, you can also add profiles or permission sets. Users without these permissions can only find profiles and permission sets for Experience Cloud sites that they're members of.

Sample Code

```
// Create a new NetworkMemberGroup with a profile as the ParentId
NetworkMemberGroup nmgInsert = new NetworkMemberGroup();
nmgInsert.setNetworkId('{enter your network ID : ODB...}');
nmgInsert.setParentId('{enter the profile or permission set ID : 00e... or 0PS...}');
SaveResult[] results = connection.create(new SObject[] { nmgInsert });

// Update an existing NetworkMemberGroup to be removed from the Network
NetworkMemberGroup nmgUpdate = new NetworkMemberGroup();
nmgUpdate.setId('{enter your NetworkMemberGroup ID : 0DL...}');
```

```
nmgUpdate.setAssignmentStatus('WaitingForRemove');
SaveResult[] results = connection.update(new SObject[] { nmgUpdate });
```

NetworkModeration

Represents a flag on an item in a community. This object is available in API version 30.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

This object is available only when your org has digital experiences enabled.

Fields

Field Name	Details
EntityId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the post, comment, or file that was flagged.
ModerationType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort Description Determines the type of flag applied to an item. Values are: - FlagAsInappropriate - FlagAsSpam
NetworkId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the community in which the item was flagged.

Field Name	Details
Visibility	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Nillable, Sort Description Determines visibility of a flagged item. Values are: • SelfAndModerators—The user who flagged the item and any moderators can see the flagged item. This is the default value. • ModeratorsOnly—Only moderators can see the flagged item. If ModeratorsOnly is selected, only moderators can set flags using the API.

Usage

Use this object to view the items flagged for moderation within a community. Additionally, users with “Moderate Feeds” and “Modify All Data” can remove flags.

Flags on items are created either when a member manually flags an item in a community (if flagging is enabled for that community), or when a trigger automatically flags an item because the item met the trigger criteria.

NetworkPageOverride

Represents information about custom pages used to override the default pages in Experience Cloud sites. You can create Experience Builder or Visualforce pages and override the default pages in a site. Using custom pages allows you to create a more personalized experience for your users. This object is available in API version 34.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

- Only users with the Create and Setup Experiences permission can update this object.
- You can’t override the Change Password Page with a page created using Experience Builder. You can only override it with a Visualforce page.

Fields

Field Name	Details
NetworkId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Sort
	Description The ID of the Experience Cloud site where a custom page is used to override a default page.
OverrideSetting	Type picklist
	Properties Create, Filter, Group, Restricted picklist, Sort, Update
	Description The type of the page used to override a default page in the Experience Cloud site. <code>OverrideSetting</code> can take the following values: • <code>Standard</code>—The standard page that comes by default with the site. • <code>Configurable</code>—The page created when the Configurable Self-Reg registration page type or the Login Discovery login page type is selected. • <code>Designer</code>—A custom page created using Experience Builder. • <code>Visualforce</code>—A custom page created using Visualforce.
OverrideType	Type picklist
	Properties Create, Filter, Group, Restricted picklist, Sort, Update
	Description The name of the default page in the Experience Cloud site that you want to override with a custom page. <code>OverrideType</code> can take the following values: • <code>LoginRequired</code> • <code>ChangePassword</code> • <code>ForgotPassword</code> • <code>SelfReg</code> • <code>Home</code>

NetworkSelfRegistration

Represents the account that self-registering Experience Cloud users are associated with by default. Self-registering users in an Experience Cloud site are required to be associated with an account, which the admin must specify while setting up self-registration for the site. If an account isn't specified, Salesforce creates person accounts (when enabled) for self-registering users. This object is available in API version 34.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the account that self-registering users in the Experience Cloud site are associated with.
ApexHandlerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the Apex handler created by Configurable Self-Reg registration page type.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the org. The default value is USD.
ExecuteApexHandlerAsId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the user who is executing the configurable self-registration handler.
NetworkId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Sort, Update Description The ID of <code>NetworkId</code> is unique within your org. You can use only one account per Experience Cloud site to assign self-registering users.
<code>OptionsDisableStandardRgstrComponent</code>	Type boolean Properties Create, Filter, Update Description Determines whether you can use standard Aura and Lightning Web Runtime (LWR) components for self-registration. If this field is <code>true</code>, self-registration flows that use these components don't work. For more control over self-registration, set this field to <code>true</code> if you're not using the standard self-registration component.
<code>OptionsIncludePassword</code>	Type Boolean Properties Create, Filter, Update Description Option on Configurable Self-Reg registration page. If true, the Include Password field is selected.
<code>OptionsShowEmail</code>	Type Boolean Properties Create, Filter, Update Description Option on Configurable Self-Reg registration page. If true, the Email field appears on the self-registration form.
<code>OptionsShowFirstName</code>	Type Boolean Properties Create, Filter, Update Description Option on the Configurable Self-Reg registration page. If true, the First Name field appears on the self-registration form.

Field Name	Details
OptionsShowLastName	Type Boolean Properties Create, Filter, Update Description Option on the Configurable Self-Reg registration page. If true, the Last Name field appears on the self-registration form.
OptionsShowMobilePhone	Type Boolean Properties Create, Filter, Update Description Option on the Configurable Self-Reg registration page. If true, the Mobile field appears on the self-registration form.
OptionsShowNickname	Type Boolean Properties Create, Filter, Update Description Option on the Configurable Self-Reg registration page. If true, the Nickname field appears on the self-registration form.
OptionsShowUsername	Type Boolean Properties Create, Filter, Update Description Option on the Configurable Self-Reg registration page. If true, the Username field appears on the self-registration form.
PermissionSetGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the permission set group used for the self registration. This field is a relationship field. Relationship Name PermissionSetGroup

Field Name	Details
	Refers To PermissionSetGroup
VerificationMethod	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of verification method that a user must supply when registering, which can be: • SyncEmail—User must supply an email address to verify identity. • SMS—User must supply a phone number to verify identity.

NetworkUserHistoryRecent

Represents an Experience Cloud site user's history of accessed records. This object is available in API version 42.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `undelete()`

Special Access Rules

Only users with the Modify All Data permission can view and delete these data.

Fields

Field	Details
AccessTimestamp	Type datetime Properties Create, Filter, Sort Description The time at which the record was accessed.
ActionType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description Indicates the action type taken by the user. The possible values are: • Read • Write
DomainName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The domain used to access the record.
FeedCommentId	Type reference Properties Create, Filter, Group, Sort, Update Description Feed comment accessed by the user.
FeedItemId	Type reference Properties Create, Filter, Group, Sort, Update Description Feed item accessed by the user.
NetworkId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the Experience Cloud site used to access the record or comment.
NetworkUserId	Type reference Properties Create, Filter, Group, Sort, Update Description User's Experience Cloud site user ID to access the record or comment.

Field	Details
RecordId	Type reference Properties Create, Filter, Group, Sort, Update Description The record that was accessed.
RecordKeyPrefix	Type string Properties Create, Filter, Group, Sort, Update Description Record's ID key prefix.
Url	Type string Properties Create, Filter, Group, Sort, Update Description The URL from which the user accessed the record.
UserType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of user who accessed this record. The possible values include: • Standard • Partner • Customer Portal Manager • Customer Portal User • Guest • High Volume Portal • CSN Only • Self Service

Usage

Use the NetworkUserHistoryRecent object to delete comments, posts, or record access by Experience Cloud site users who would like all such activity to be removed.

Note

Represents a note, which is text associated with a custom object or a standard object, such as a Contact, Contract, or Opportunity.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Body	Type textarea Properties Create, Nillable, Update Description Body of the note. Limited to 32 KB.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
IsPrivate	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If <code>true</code>, only the note owner or a user with the “Modify All Data” permission can view the note or query it via the API. Note that if a user who does not have the “Modify All Data” permission sets this field to <code>true</code> on a note that they do not own, then they can no longer query, delete, or update the note. Label is Private.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the user who owns the note.

Field	Details
	This is a relationship field. Relationship Name Owner Relationship Type Lookup Refers To User
ParentId	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the object associated with the note. This is a polymorphic relationship field. Relationship Name Parent Relationship Type Lookup Refers To Account, Accreditation, AssessmentIndicatorDefinition, AssessmentTask, AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskOrder, Asset, Award, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis, CareMetricTarget, CareObservationComponent, CarePgmProvHealthcareProvider, CareProgram, CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee, CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider, CareProgramTeamMember, CareProviderAdverseAction, CareProviderFacilitySpecialty, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareTaxonomy, CommSubscription, CommSubscriptionChannelType, CommSubscriptionConsent, CommSubscriptionTiming, Contact, Contract, CreditMemo, DelegatedAccount, EngagementChannelType, EnrollmentEligibilityCriteria, HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, IdentityDocument, Image, IndividualApplication, Invoice, Lead, Location, MemberPlan, Opportunity, Order, OtherComponentTask, PersonEducation, PersonLifeEvent, Product2, ProductRequest, ProductRequestLineItem, PurchaserPlan, ReceivedDocument, ServiceAppointment, ServiceResource, Shift, SocialPost, Visit, VisitedParty, Visitor, VolunteerProject, WorkOrder, WorkOrderLineItem
Title	Type string

Field	Details
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description Title of the note.

Usage

Use this object to manage notes for an object.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

NoteAndAttachment

This read-only object contains all notes and attachments associated with an object.

Supported Calls

`describeSObjects()`

Fields

Field	Details
<code>IsDeleted</code>	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted .
<code>IsNote</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the object contains a note (<code>true</code>) or an attachment (<code>false</code>).
<code>IsPrivate</code>	Type boolean

Field	Details
	Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, only the note owner or a user with the “Modify All Data” permission can view the note or query it via the API. Note that if a regular user who does not have “Modify All Data” permission sets this field to <code>true</code> on a note that they do not own, then they can no longer query, delete, or update that note. Label is Private.
OwnerId	Type reference Properties Filter, Group, Sort Description ID of the user who owns the note and attachment. This is a relationship field. Relationship Name Owner Relationship Type Lookup Refers To User
ParentId	Type reference Properties Filter, Group, Sort Description ID of the parent object. This is a polymorphic relationship field. Relationship Name Parent Relationship Type Lookup Refers To Account, Accreditation, AssessmentIndicatorDefinition, AssessmentTask, AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskOrder, Asset, Award, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis, CareMetricTarget, CareObservationComponent, CarePgmProvHealthcareProvider, CareProgram, CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee, CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider,

Field	Details
	CareProgramTeamMember, CareProviderAdverseAction, CareProviderFacilitySpecialty, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareTaxonomy, CommSubscription, CommSubscriptionChannelType, CommSubscriptionConsent, CommSubscriptionTiming, Contact, Contract, CreditMemo, DelegatedAccount, EngagementChannelType, EnrollmentEligibilityCriteria, HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, IdentityDocument, Image, IndividualApplication, Invoice, Lead, Location, MemberPlan, Opportunity, Order, OtherComponentTask, PersonEducation, PersonLifeEvent, Product2, ProductRequest, ProductRequestLineItem, PurchaserPlan, ReceivedDocument, ServiceAppointment, ServiceResource, Shift, SocialPost, Visit, VisitedParty, Visitor, VolunteerProject, WorkOrder, WorkOrderLineItem
Title	Type string Properties Filter, Nillable, Group, Sort Description Title of the note.

Usage

Use this object to list all notes and attachments for an object.

To retrieve notes and attachments, issue a describe call on an object, which returns a query result for each activity since the record was created. You can't directly query this object.

SEE ALSO:

[Note](#)

[Attachment](#)

NoteTag

Associates a word or short phrase with a Note.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
ItemId	Type reference Properties Create, Filter Description ID of the tagged item.
Name	Type string Properties Create, Filter Description Name of the tag. If this value does not already exist, a new TagDefinition is created and becomes the parent of this Tag object. Otherwise, a TagDefinition with the same name becomes the parent of this Tag object. Parent relationships are created automatically.
TagDefinitionId	Type reference Properties Filter Description ID of the parent TagDefinition object that owns the tag.
Type	Type picklist Properties Create, Filter, Restricted picklist Description Defines the visibility of a tag. Valid values: • Public—The tag can be viewed and manipulated by all users in an organization. • Personal—The tag can be viewed or manipulated only by a user with a matching OwnerId.

Usage

NoteTag stores the relationship between its parent TagDefinition and the Note being tagged. Tag objects act as metadata, allowing users to describe and organize their data.

When a tag is deleted, its parent TagDefinition will also be deleted if the name is not being used; otherwise, the parent remains. Deleting a TagDefinition sends it to the Recycle Bin, along with any associated tag entries.

OAuthCustomScope

Represents a permission defining the protected data that a connected app can access from an external entity when Salesforce is the OAuth authorization provider.

An OAuth custom scope tells an external entity about a connected app's permissions to access protected data. The OAuth custom scope that you create in your Salesforce org corresponds to the same custom scope defined in your external entity, and assigned to the resource.

For example, you define an Order Status custom scope in your external entity that allows access to customer order status data in your order system's API. In Salesforce, you create an OAuth custom scope that you also name Order Status. You assign this custom scope to the connected app requesting access to the order status API. When the external entity receives the connected app's request to access a customer's order status, it validates the connected app's access token and Order Status scope. With a successful validation, the app can access the customer order status information in the order system's API.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

You must have the "Manage Connected Apps" permission to access this object.

Fields

Field Name	Details
Description	Type string Properties Create, Filter, Group, Sort, Update Description The description of the permission provided to the connected app by the scope. The custom scope's description must be unique, can only include alphanumeric characters, and can be up to 60 characters long. You can enter a custom label in place of a description. An advantage of using a custom label is that you can maintain reusable text in a single location and translate the text into multiple languages. See Custom Labels.  Note: The description formatting requirements that apply to custom scopes also apply to custom labels.
DeveloperName	Type string

Field Name	Details
	Properties Create, Filter, Group, Sort, Update Description Use when referring to the OAuth custom scope from a program. This label must be unique, and can include only alphanumeric characters and underscores.
IsPublic	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the object is included in the connected app's OpenID Connect discovery endpoint. For more information, see OpenID Connect Discovery Endpoint.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates the default language defined for the developing org.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The master label for the custom scope record. This label must be unique, and can include only alphanumeric characters and underscores.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix for an OAuth custom scope that's been installed as part of a second-generation managed package. If the custom scope isn't packaged, this value is empty. This field is available in API version 61.0 and later.

OauthCustomScopeApp

Represents the name of the connected app to which the custom scope is assigned. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
OauthCustomScopeId	Type reference Properties Create, Filter, Group, Sort, Update Description The name of the connected app to which the custom scope is assigned. If the connected app is part of a package, include the package's namespace prefix with the connected app's name. Use the following format: <namespace_prefix>__<connected_app>. Use two underscores (__) between the namespace prefix and connected app's name. This is a relationship field. Relationship Name OauthCustomScope Relationship Type Lookup Refers To OauthCustomScope

OauthToken

Represents an OAuth access token for connected app authentication. Use this object to create a user interface for token management. This object is available in API version 32.0 and later.

A connected app integrates an application with Salesforce using APIs. Connected apps use standard SAML and OAuth protocols to authenticate, provide single sign-on, and provide tokens for use with Salesforce APIs. In addition to standard OAuth capabilities, connected apps allow Salesforce admins to set various security policies and have explicit control over who can use the corresponding apps. Each time that a user grants access to an application, the application obtains a new access token.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

Users with the Customize Application permission see all tokens for all users in the org. Otherwise, you see only your own tokens.

If you try to use [Apex DML operations](#) and then query this object in the same call, you get an `UncommittedWork` error with this description.

A callout was unsuccessful because of pending uncommitted work related to a process, flow, or Apex operation.
Commit or roll back the work, and then try again.

To avoid this error, execute DML operations and queries in separate, asynchronous calls.

Fields

Field Name	Details
AccessToken	Type string Properties Filter, Group, Nillable, Sort Description The refresh token for authorization.
AppMenuItemId	Type reference Properties Filter, Group, Nillable, Sort Description The unique ID for the App Picker menu item that's associated with this OAuth token. This is a relationship field. Relationship Name AppMenuItem Relationship Type Lookup Refers To AppMenuItem
AppName	Type string Properties Filter, Group, Nillable, Sort Description The label for the connected app that's associated with this OAuth token.

Field Name	Details
DeleteToken	Type string Properties Filter, Group, Nillable, Sort Description A token that can be used at the revoke OAuth token endpoint to remove this token.
Id	Type ID Properties Defaulted on create, Filter, Group, idLookup, Sort Description Reserved for future use. Currently, the value is always <code>null</code>.
LastUsedDate	Type dateTime Properties Filter, Nillable, Sort Description The most recent date when the OAuth token was used.
RequestToken	Type string Properties Filter, Group, Nillable, Sort Description The authorization code that was used to request the corresponding AccessToken. With this authorization code, you can revoke the corresponding AccessToken by passing the DeleteToken.
UseCount	Type int Properties Filter, Group, Nillable, Sort Description How often the token has been used.
UserId	Type reference

Field Name	Details
	Properties Filter, Group, Nillable, Sort
	Description The owner of the token. This is a relationship field.
	Relationship Name User
	Relationship Type Lookup
	Refers To User

Usage

To delete an AccessToken, send a request to the revoke OAuth token endpoint with the DeleteToken as the parameter. For example, the URL `https://MyDomainName.my.salesforce.com/services/oauth2/revoke?token=(the DeleteToken)` causes the deletion of the token.

In API version 34.0 and later, this object was enhanced to help manage high instance counts. A `query()` call returns up to 500 rows. A `queryMore()` call returns 500 more, up to 2,500 total. No more records are returned after 2,500. To make sure that you don't miss any records, issue a `COUNT()` query in a `SELECT` clause for OauthToken. This query gives you the total number of records. If there are more than 2,500 records, use these options to manage your results.

- Divide queries by filtering on fields like `userId` to return subsets of less than 2,500 records.
- Use **OFFSET** to get batches of 2,000 records. Start with an **OFFSET** of 0 and then increment by 2,000. If you use this option, we recommend that you also use **LIMIT** to limit each query to 2,000.



Note: The **OFFSET** clause is limited to 2,000 rows. Requesting an offset greater than 2,000 results in a `NUMBER_OUTSIDE_VALID_RANGE` error.

For example, use an initial query with this structure.

```
SELECT <desired fields> FROM OauthToken LIMIT 2000 OFFSET 0
```

Then, run another query with an offset of 2,000.

```
SELECT <desired fields> FROM OauthToken LIMIT 2000 OFFSET 2000
```

Continue to increase the offset by 2,000 until you have results for all records.

OauthTokenExchangeHandler

Represents a token exchange handler. The token exchange handler also consists of an Apex class. During the OAuth 2.0 token exchange flow, the token exchange handler is used to validate tokens from an external identity provider and to map users to Salesforce. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Fields

Field	Details
Description	Type string Properties Create, Filter, Group, Sort, Update Description A description for your token exchange handler.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The API name for the handler.
IsContactCreationAllowed	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description For internal use only.
IsEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the handler is enabled for the token exchange flow. The default value is <code>false</code>.
IsUserCreationAllowed	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Indicates whether the handler can set up new users. During the token exchange flow, the Apex handler maps users from the identity provider to Salesforce. If the <code>IsUserCreationAllowed</code> field is <code>true</code>, the <code>canCreateUser</code> boolean in the <code>getUserForTokenSubject</code> method is <code>true</code>, and the user doesn't exist in Salesforce, the handler sets up a new User object, which Salesforce automatically inserts to finish creating the user. The default value is <code>false</code>.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates the language used in the org where the token exchange handler was created. Possible values are: • <code>da</code>—Danish • <code>de</code>—German • <code>en_US</code>—English • <code>es</code>—Spanish • <code>es_MX</code>—Spanish (Mexico) • <code>fi</code>—Finnish • <code>fr</code>—French • <code>it</code>—Italian • <code>ja</code>—Japanese • <code>ko</code>—Korean • <code>nl_NL</code>—Dutch • <code>no</code>—Norwegian • <code>pt_BR</code>—Portuguese (Brazil) • <code>ru</code>—Russian • <code>sv</code>—Swedish • <code>th</code>—Thai • <code>zh_CN</code>—Chinese (Simplified) • <code>zh_TW</code>—Chinese (Traditional)
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update

Field	Details
	Description The label of the token exchange handler record.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. - In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. - In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
SupportedTokenTypesAccessToken	Type boolean Properties Create, Filter, Update Description Indicates whether the handler supports opaque access tokens from the identity provider.
SupportedTokenTypesIdToken	Type boolean Properties Create, Filter, Update Description Indicates whether the handler supports OpenID Connect ID tokens from the identity provider.
SupportedTokenTypesJwt	Type boolean Properties Create, Filter, Update Description Indicates whether the handler supports tokens from the identity provider that are in JWT format, such as JWT-based access tokens.

Field	Details
SupportedTokenTypesRefreshToken	Type boolean Properties Create, Filter, Update Description Indicates whether the handler supports OAuth 2.0 refresh tokens from the identity provider.
SupportedTokenTypesSaml2	Type boolean Properties Create, Filter, Update Description Indicates whether the handler supports SAML 2.0 assertions from the identity provider.
TokenHandlerApexId	Type reference Properties Create, Filter, Group, Sort, Update Description The Apex class associated with the token exchange handler. The class contains methods to validate the token and map users to Salesforce. It must extend the <code>Oauth2TokenExchangeHandler</code> Apex class. This field is a relationship field. Relationship Name TokenHandlerApex Relationship Type Lookup Refers To ApexClass

OauthTokenExchHandlerApp

Represents the enablement settings for a specific Salesforce connected app or external client app that's enabled for the token exchange handler. A handler can be enabled for multiple apps. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Fields

Field	Details
ApexExecutionUserId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the user who runs the Apex token exchange handler. We recommend that you use an integration user. This field is a relationship field. Relationship Name ApexExecutionUser Relationship Type Lookup Refers To User
ConnectedApplicationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The connected app that's being used to integrate with Salesforce. This field is a relationship field. Relationship Name ConnectedApplication Relationship Type Lookup Refers To ConnectedApplication
IsDefault	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the token exchange handler is the default handler for this app. During the token exchange flow, in the token request, you can optionally include a <code>token_handler</code>

Field	Details
	parameter with the name of a specific handler's Apex class. If you don't include this parameter, Salesforce defaults to the default handler. The default value is <code>false</code>.
<code>OauthTokenExchangeHandlerId</code>	Type reference Properties Create, Filter, Group, Sort, Update Description The <code>OauthTokenExchangeHandler</code> with which these enablement settings are associated. This field is a relationship field. Relationship Name <code>OauthTokenExchangeHandler</code> Relationship Type Lookup Refers To <code>OauthTokenExchangeHandler</code>

ObjectDataImport

Represents the data import status of one or more object records. This object is available in API version 57.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
<code>EndDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The date and time (in UTC) when the data import finished.
<code>FileName</code>	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description Optional. If the data import was from a comma-delimited file (CSV), the name of the file. The maximum length is 120 characters.
ObjectDataImportNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-generated number identifying the data import.
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the user who owns the data import status record. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PrimaryObject	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The name of the primary object being imported. For example, Lead. This value is usually provided programmatically. The maximum length is 120 characters.
Result	Type textarea Properties Nillable Description The JSON response of the data object import result, including error messages.

Field	Details
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The processing status of the data object import. Possible values are: Completed In Progress

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ObjectDataImportChangeEvent

Sharing rules are available for the object.

ObjectDataImportOwnerSharingRule on page 65

Sharing rules are available for the object.

ObjectDataImportShare on page 67

Sharing is available for the object.

ObjectDataImportReference

Represents the relationships to the associated reference objects showing the source from which the data is imported. This object is available in API version 57.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

`ObjectDataImportReference` is read only and can only be queried.

Fields

Field	Details
<code>ObjectDataImportId</code>	Type reference Properties Filter, Group, Sort Description Foreign key to the <code>ObjectDataImport</code> object. This field is a relationship field. Relationship Name <code>ObjectDataImport</code> Relationship Type Lookup Refers To <code>ObjectDataImport</code>
<code>ObjectDataImportReferenceNumber</code>	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Foreign key to the reference object. For example, <code>AsyncApiJob</code> or <code>DatasetImportRequest</code>.

ObjectMetadataTag

Represents a meta tag for a store page. Meta tags in HTML documents provide structured data used by search engines for ranking and to show content in search results. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Possible values are: • USD—U.S. Dollar The default value is USD.
Language	Type string Properties Create, Filter, Group, Sort, Update Description The language of the page meta tag.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the page meta tag.
RecordId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the product or product category with which this record is associated. This is a polymorphic relationship field. Relationship Name Record Relationship Type Lookup

Field	Details
	Refers To Product2, ProductCategory Availability in API versions: - Product2 is available in API versions 60.0 and later - ProductCategory is available in API versions 63.0 and later
TagType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of the page meta tag. Possible values are: - Description—Meta Description - Title—Title Tag
Value	Type textarea Properties Create, Filter, Group, Sort, Update Description The value of the page meta tag. This value populates the HTML tag. For example, a meta tag with a Type of Title and a Value of GoBrew Espresso renders the HTML <code><title>GoBrew Espresso</title></code> for the page.

ObjectPermissions

Represents the enabled object permissions for the parent PermissionSet. This object is available in API version 24.0 and later.

To grant a user access to an object, associate an ObjectPermissions record with a PermissionSet that's assigned to a user. ObjectPermissions records are only supported in PermissionSet, not in Profile.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, only users with the View Setup and Configuration permission can access this object.

Fields

Field Name	Details
ParentId	Type reference Properties Create, Filter, Group, Sort Description The Id of this object's parent PermissionSet. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To PermissionSet
PermissionsCreate	Type boolean Properties Create, Filter, Update Description If <code>true</code>, users assigned to the parent PermissionSet can create records for this object. Requires <code>PermissionsRead</code> for the same object to be <code>true</code>.
PermissionsDelete	Type boolean Properties Create, Filter, Update Description If <code>true</code>, users assigned to the parent PermissionSet can delete records for this object. Requires <code>PermissionsRead</code> and <code>PermissionsEdit</code> for the same object to be <code>true</code>.
PermissionsEdit	Type boolean Properties Create, Filter, Update Description If <code>true</code>, users assigned to the parent PermissionSet can edit records for this object. Requires <code>PermissionsRead</code> for the same object to be <code>true</code>.

Field Name	Details
PermissionsModifyAllRecords	Type boolean Properties Create, Filter, Update Description If <code>true</code>, users assigned to the parent PermissionSet can edit all records for this object, regardless of sharing settings. Requires <code>PermissionsRead</code>, <code>PermissionsDelete</code>, <code>PermissionsEdit</code>, and <code>PermissionsViewAllRecords</code> for the same object to be <code>true</code>.
PermissionsRead	Type boolean Properties Create, Filter, Update Description If <code>true</code>, users assigned to the parent PermissionSet can view records for this object.
PermissionsViewAllFields	Type boolean Properties Create, Filter, Update Description If <code>true</code>, users assigned to the parent PermissionSet can view all fields and field data for this object. Available in API version 63.0 and later.
PermissionsViewAllRecords	Type boolean Properties Create, Filter, Update Description If <code>true</code>, users assigned to the parent PermissionSet can view all records for this object, regardless of sharing settings. Requires <code>PermissionsRead</code> for the same object to be <code>true</code>.
ObjectType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The object's API name. For example, <code>Merchandise__c</code>.

Permission Dependencies

Some user permissions have dependencies on object permissions. For example, if a permission set has the “Transfer Leads” permission, it also has “Read” and “Create” on the leads object.

You can query from ObjectPermissions up to the parent PermissionSet object. For example:

```
SELECT Parent.Name, Parent.PermissionsTransferAnyLead, PermissionsRead, PermissionsCreate
FROM ObjectPermissions
WHERE SubjectType = 'Lead'
```

Determining Object Access with “Modify All Data”

When using SOQL to query object permissions, be aware that some object permissions are enabled because a user permission requires them.

The exception to this rule is when “Modify All Data” is enabled. While it enables all object permissions, it doesn’t physically store any object permission records in the database. As a result, unlike object permissions that are required by a user permission—such as “View All Data” or “Import Leads”—the query still returns permission sets with “Modify All Data,” but the object permission record will contain an invalid ID that begins with “000”. This ID indicates that the object has full access due to “Modify All Data” and the object permission record can’t be updated or deleted. To remove full access from these objects, disable “Modify All Data” and then delete the resulting object permission record. This ensures that when using SOQL to find all the objects that have full access, it returns all objects that have this access regardless of whether it’s due to “Modify All Data” or because an administrator set full access.

For example, the following will return all permission sets that have “Read” on the Merchandise__c object, regardless of whether it’s explicitly defined on the object or implicitly defined through “Modify All Data.”

```
SELECT Id, Parent.label, SubjectType, PermissionsRead,
       Parent.PermissionsModifyAllData, ParentId
FROM ObjectPermissions
WHERE PermissionsRead = true and SubjectType = 'Merchandise__c'
```

Nesting Object Permissions

You can nest ObjectPermissions in a PermissionSet query. For example, the following returns any permission sets where “Transfer Leads” is true. Additionally, the result set will include the “Read” object permission on leads. This is done by nesting the SOQL with an object permission query using the relationship name for object permissions: ObjectPerms.

```
SELECT Id, Name, PermissionsTransferAnyLead,
       (SELECT Id, PermissionsRead from ObjectPerms where SubjectType='Lead')
FROM PermissionSet
WHERE PermissionsTransferAnyLead = true
```

As a result, it’s possible to traverse the relationship between the PermissionSet and any child-related objects (in this case, ObjectPermissions). You can do this from the PermissionSet object by using the child relationship (ObjectPerms, FieldPerms, and so on) or from the child object by referencing the PermissionSet with `Parent.permission_set_attribute`.

It’s important to consider when to use a conditional WHERE statement to restrict the result set. To query based on an attribute on the permission set object, nest the SOQL with the child relationship. However, to query based on an attribute on the child object, you must reference the permission set parent attribute in your query.

The following two queries return the same columns with different results, based on whether you use the child relationship or parent notation.

```
SELECT Id, Name, PermissionsModifyAllData,
(SELECT Id, SobjectType, PermissionsRead from Objectperms)
FROM PermissionSet
WHERE PermissionsModifyAllData=true
```

versus:

```
SELECT Id, SOBJECTType, PermissionsRead, Parent.Id, Parent.Name,
Parent.PermissionsModifyAllData
FROM ObjectPermissions
WHERE SOBJECTType='Merchandise__c'
```

SEE ALSO:

- [PermissionSet](#)
- [FieldPermissions](#)

ObjectRelatedUrl

Represents a URL slug for a Product or Category page on a B2B Commerce or D2C Commerce LWR site, or a custom object, account, or contact page on an enhanced LWR Experience Cloud site. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Your org must have B2B Commerce or D2C Commerce license enabled for commerce use cases. ObjectRelatedUrl is available for Product2 and ProductCategory records in Commerce, and on custom object, account and contact record pages in enhanced LWR sites.

Fields

Field	Details
LanguageCode	Type string Properties Create, Filter, Group, Sort, Update Description Required. The combined language and locale ISO code, which controls the language of the object-related URL. The maximum length is 8 characters.

Field	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the object-related URL. This field isn't editable.
ParentId	Type reference Properties Create, Filter, Group, Sort, Update Description Required. The ID of the parent record that the <code>UrlName</code> refers to. <code>ParentId</code> can point only to Product2, ProductCategory, and custom object, account, and contact record pages. This field is a polymorphic relationship field. Relationship Name Parent Relationship Type Lookup Refers To Product2, ProductCategory, account, contact, and custom objects Availability in API versions: • Product2 and ProductCategory in LWR Commerce stores (available in API version 58.0 and later) • Custom object pages on enhanced LWR sites (available in API version 60.0 and later) • Account and contact pages on enhanced LWR sites (available in API version 61.0 and later)
Scope	Type string Properties Create, Filter, Group, Sort, Update Description Required. Helps ensure uniqueness of the <code>UrlName</code> field across all records with the same <code>Scope</code> and <code>LanguageCode</code> values. The maximum length is 18 characters.
UniqueIndex	Type string Properties Filter, idLookup, Nillable, Sort

Field	Details
	Description Ensures uniqueness for each record within your org and creates an index for lookup. This field isn't editable. This field is a calculated field.
UrlName	Type string Properties Create, Filter, Group, Sort, Update Description Required. The URL slug for the record.



Note: When creating a query, for example, `SELECT UrlName From ObjectRelatedUrl WHERE Scope='01t'`, the WHERE condition must use `Id`, `UniqueIndex`, `Scope`, or `ParentId`.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ObjectRelatedUrlChangeEvent on page 68 (API version 62.0)

Change events are available for the object.

ObjectTerritory2AssignmentRule

Represents a territory assignment rule that's associated with an object, such as Account. `ObjectTerritory2AssignmentRuleItem` can be created or deleted if the `BooleanFilter` field on its corresponding `ObjectTerritory2AssignmentRule` is `null`. Available if Sales Territories has been enabled.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Standard users can access this object. If a territory model is in `Active` state, any standard user can view that model, including its territories, assignment rules, assigned records, and assigned users. Users cannot view territory models in other states (such as `Planning` or `Archived`).

Fields

Field Name	Details
BooleanFilter	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Represents advanced filter conditions that were specified for the rule in the online application. For example, "(1 AND 2) OR 3."
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description Required. The unique name of the object in the API. This name can contain only underscores and alphanumeric characters and must be unique in your organization. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. The field label in the user interface is <code>Unique Name</code>.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the rule is active (true) or inactive (false). Via the API, active rules run automatically when object records are created and edited. The exception is when the value of the <code>IsExcludedFromRealign</code> field on an object record is <code>true</code>, which prevents record assignment rules from evaluating that record.
Language	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field Name	Details
	Description The language of the label in the user interface.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Required. The user interface label for the territory type.
ObjectType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The object that the rule is defined for. For API version 31, Account only.
Territory2ModelId	Type reference Properties Create, Filter, Group, Sort Description The ID of the territory model.

ObjectTerritory2AssignmentRuleItem

A single row of selection criteria for an ObjectTerritory2AssignmentRule object. ObjectTerritory2AssignmentRuleItem can only be created or deleted if the `BooleanFilter` field on its corresponding ObjectTerritory2AssignmentRule object is a `null` value. Available if Sales Territories has been enabled.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Standard users can access this object. If a territory model is in `Active` state, any standard user can view that model, including its territories and assignment rules. For territories in an active model, any standard user can view assigned records and assigned users subject to your Salesforce sharing settings. Users cannot view territory models in other states (such as `Planning` or `Archived`).

Fields

Field Name	Details
Field	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The standard or custom object field that the rule item will operate on.
Operation	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The criterion to apply for the rule item. For example: <i>equals</i>, <i>notContain</i>, or <i>startsWith</i>.
RuleId	Type reference Properties Create, Filter, Group, Sort Description The ID of the associated ObjectTerritory2AssignmentRule.
SortOrder	Type int Properties Create, Filter, Group, Sort, Update Description The order in which this row is evaluated in relation to other ObjectTerritoryAssignmentRuleItem objects for the given ObjectTerritoryAssignmentRule. This field is required for assignment rule items, which are used in the Boolean conditions in assignment rule formulas.
Value	Type string Properties Create, Filter, Nillable, Sort, Update Description The field value or values to evaluate. For example: if the field is <code>Billing ZIP/Postal Code</code>, a value might be <code>94105</code>.

ObjectTerritory2Association

Represents an association (by assignment) between a territory and an object record such as an account or a lead.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Available after enabling Sales Territories.

Standard and partner users can access this object. If a territory model is in `Active` state, any standard or partner user can view that model, including its territories and assignment rules. For territories in an active model, any standard or partner user can view assigned records and assigned users subject to your sharing settings.

If you delete associations, you can query them for up to 12 hours. Keep in mind that deleted associations bypass the recycle bin.

Fields

Field Name	Details						
AssociationCause	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The means by which the record was associated with the territory. User interface field label is <code>Method</code>. Possible values are: <code>Territory2AssignmentRule</code>—Territory assignment rule association <code>Territory2Manual</code>—Manual association						
ObjectId	Type reference Properties Create, Filter, Group, Sort Description The ID of the object assigned to the territory. <table><tr><th>Object</th><th>Availability</th></tr><tr><td>Account</td><td>API version 30.0 and later</td></tr><tr><td>Lead</td><td>API version 55.0 and later</td></tr></table>	Object	Availability	Account	API version 30.0 and later	Lead	API version 55.0 and later
Object	Availability						
Account	API version 30.0 and later						
Lead	API version 55.0 and later						

Field Name	Details
	This is a polymorphic relationship field. Relationship Name Object Relationship Type Lookup Refers To Account Lead
ObjectType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of the object. Possible values are: • Account • Lead
Territory2Id	Type reference Properties Create, Filter, Group, Sort Description The ID of the territory that the record is assigned to. This is a relationship field. Relationship Name Territory2 Relationship Type Lookup Refers To Territory2

ObjectUserTerritory2View

Represents a user and object, such as an account or lead, assigned to a territory. This object is available in API version 58.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

To see this object, enable Sales Territories.

Fields

Field	Details
ObjectId	Type reference Properties Filter, Group, Nillable, Sort Description Required field for querying ObjectUserTerritory2View. ID of the object that the territory user is assigned to. This field is a polymorphic relationship field. Relationship Name Object Refers To Account, Lead
RoleInTerritory2	Type picklist Properties Filter, Group, Nillable, Sort Description Role of the user assigned to the territory.
Territory2Id	Type reference Properties Filter, Group, Nillable, Sort Description ID of the territory to which the object and user are assigned. This field is a relationship field. Relationship Name Territory2 Refers To Territory2

Field	Details
UserId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the user assigned to the territory. This field is a relationship field. Relationship Name User Refers To User

OmniSupervisorConfig

Represents the Command Center for Service configuration for an assigned group of supervisors. This object is available in API version 41.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. Because changing terms in our code can break current implementations, we maintained this object's name.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()` `update()`, `upsert()`

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.

As of Spring '20 and later, only authenticated internal and external users can access this object.

Fields

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores.

Field	Details
	In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
IsTimelineHidden	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If set to <code>true</code>, hides the agent timeline from the supervisors assigned to this Command Center for Service configuration. The default value is <code>false</code>. This field is available in API version 53.0 and later.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The language of this Command Center for Service configuration.
MasterLabel	Type string Properties Create, Filter, Group, Sort Description A unique label name for this Command Center for Service configuration. The name must begin with a letter. The name can contain alphanumeric characters and underscores. The name can't contain spaces, two consecutive underscores, or end with an underscore. The name appears as Command Center for Service Configuration Name in the UI.
SkillVisibility	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Determines which work items based on skills are visible to the supervisors assigned to this Command Center for Service configuration. Possible values are: • <code>AllSkills</code> — Show work items with all skill requirements selected in this Command Center for Service configuration.

Field	Details
	• <code>AnySkill</code> — Show work items with at least one skill requirement selected in this Command Center for Service configuration. This field is available in API version 53.0 and later.

OmniSupervisorConfigAction

Represents the actions available to the supervisors of a Command Center for Service configuration. This object is available in API version 56.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.

Only authenticated internal and external users can access this object.

Fields

Field	Details
<code>DisplayOrder</code>	Type int Properties Create, Filter, Group, Nillable, Sort Description The order in which the action is displayed.
<code>OmniSupervisorActionType</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description An action that a supervisor can perform. Possible values are: • <code>AgentDetails.CustomAction</code> • <code>AllAgents.AWSDashboard</code>—All Agents - View Amazon Real-Time Metrics • <code>AllAgents.AssignLearning</code> • <code>AllAgents.ChangeQueues</code>

Field	Details
	- AllAgents.ChangeSkills - AllAgents.CustomAction - AssignedWork.AWSDashboard—Assigned Work - View Amazon Real-Time Metrics - AssignedWork.CustomAction - AssignedWorkDetails.CustomAction - QueueDetails.CustomAction - QueuesBacklog.AWSDashboard—Queues Backlog - View Amazon Real-Time Metrics - QueuesBacklog.CustomAction - QueuesBacklog.ManageQueues—Queues Backlog - Assign Agents to Queues - SkillDetails.CustomAction - SkillsBacklog.AWSDashboard—Skills Backlog - View Amazon Real-Time Metrics - SkillsBacklog.CustomAction
OmniSupervisorConfigId	Type reference Properties Create, Filter, Group, Sort Description A unique identifier for the Command Center for Service configuration. This field is a relationship field. Relationship Name OmniSupervisorConfig Relationship Type Lookup Refers To OmniSupervisorConfig

OmniSupervisorConfigGroup

Represents the group of reps who are visible to the supervisors of a Command Center for Service configuration. The group, if visible, appears in the Agents tab of Command Center for Service. This object is available in API version 41.0 and later.

Supported Calls

create(), delete(), query(), update(), retrieve()

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.

As of Spring '20 and later, only authenticated internal and external users can access this object.

Fields

Field	Details
GroupId	Type reference Properties Create, Filter, Group, Nillable, Sort Description A unique identifier for the group of reps that's made visible to the supervisors who are assigned to the Command Center for Service configuration. This is a relationship field. Relationship Name Group Relationship Type Lookup Refers To Group
OmniSupervisorConfigId	Type reference Properties Create, Filter, Group, Sort Description A unique identifier for the Command Center for Service configuration. This is a relationship field. Relationship Name OmniSupervisorConfig Relationship Type Lookup Refers To OmniSupervisorConfig

OmniSupervisorConfigProfile

Represents the supervisor profiles to which a Command Center for Service configuration applies. User-level configurations override profile-level configurations. This object is available in API version 41.0 and later.

Supported Calls

`create()`, `delete()`, `query()`, `update()`, `retrieve()`

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.

As of Spring '20 and later, only authenticated internal and external users can access this object.

Fields

Field	Details
OmniSupervisorConfigId	Type reference Properties Create, Filter, Group, Sort Description A unique identifier for the Command Center for Service configuration. This is a relationship field. Relationship Name OmniSupervisorConfig Relationship Type Lookup Refers To OmniSupervisorConfig
ProfileId	Type reference Properties Create, Filter, Group, Nillable, Sort Description A unique identifier for the profile that's associated with this Command Center for Service configuration. A profile can be associated with only one Command Center for Service configuration. This field is unique within your org. This is a relationship field. Relationship Name Profile Relationship Type Lookup Refers To Profile

OmniSupervisorConfigQueue

Represents the queues that are visible to the supervisors of a Command Center for Service configuration. The queue, if visible, appears in the Queues Backlog and Assigned Work tabs of Command Center for Service. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.
Only authenticated internal and external users can access this object.

Fields

Field	Details
OmniSupervisorConfigId	Type reference Properties Create, Filter, Group, Sort Description om A unique identifier for the Command Center for Service configuration. This is a relationship field. Relationship Name OmniSupervisorConfig Relationship Type Lookup Refers To OmniSupervisorConfig
QueueId	Type reference Properties Create, Filter, Group, Nillable, Sort Description A unique identifier for the queue that’s made visible to the supervisors who are assigned to the Command Center for Service configuration. This is a relationship field.

Field	Details
	Relationship Name Queue
	Relationship Type Lookup
	Refers To Group

OmniSupervisorConfigSkill

Represents the skills that are visible to the supervisors of a Command Center for Service configuration. These skills, if visible, appear in the Skills Backlog tab of Command Center for Service. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.

Only authenticated internal and external users can access this object.

Fields

Field	Details
OmniSupervisorConfigId	Type reference
	Properties Create, Filter, Group, Sort
	Description A unique identifier for the Command Center for Service configuration. This is a relationship field.
	Relationship Name OmniSupervisorConfig
	Relationship Type Lookup
	Refers To OmniSupervisorConfig

Field	Details
SkillId	Type reference Properties Create, Filter, Group, Nillable, Sort Description A unique identifier for the skill that's made visible to the supervisors who are assigned to the Command Center for Service configuration. This is a relationship field. Relationship Name Skill Relationship Type Lookup Refers To Skill

OmniSupervisorConfigTab

Represents the visible tabs specified in a Command Center for Service configuration. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.

Only authenticated internal and external users can access this object.

Fields

Field	Details
DisplayOrder	Type int Properties Create, Filter, Group, Nillable, Sort Description The order in which tabs are displayed in Command Center for Service.

Field	Details
OmniSupervisorConfigId	Type reference Properties Create, Filter, Group, Sort Description A unique identifier for the Command Center for Service configuration. This is a relationship field. Relationship Name OmniSupervisorConfig Relationship Type Lookup Refers To OmniSupervisorConfig
OmniSupervisorTabType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Tabs shown on the Command Center for Service page. Possible values are: • <code>Agents</code> — the Agents tab • <code>AssignedWork</code> — the Assigned Work tab • <code>FlexiPageType</code> — A custom tab created using Lightning App Builder, with the <code>OmniSupervisorPageType</code> value of the <code>FlexiPage Type</code> field • <code>QueuesBacklog</code> — the Queues Backlog tab • <code>SkillsBacklog</code> — the Skills Backlog tab • <code>Wallboard</code> — the Wallboard tab

OmniSupervisorConfigUser

Represents the users to whom a Command Center for Service configuration applies. User-level configurations override profile-level configurations. This object is available in API version 41.0 and later.

Supported Calls

`create()`, `delete()`, `query()`, `update()`, `retrieve()`

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.

As of Spring '20 and later, only authenticated internal and external users can access this object.

Fields

Field	Details
OmniSupervisorConfigId	Type reference Properties Create, Filter, Group, Sort Description A unique identifier for the Command Center for Service configuration. This is a relationship field. Relationship Name OmniSupervisorConfig Relationship Type Lookup Refers To OmniSupervisorConfig
UserId	Type reference Properties Create, Filter, Group, Nillable, Sort Description A unique identifier for the user associated with this Command Center for Service configuration. A user can be associated with only one Command Center for Service configuration. This field is unique within your org. This is a relationship field. Relationship Name User Relationship Type Lookup Refers To User

OpenActivity

This read-only object is displayed in a related list of open activities—future events and open tasks—related to an object. It includes activities for all contacts related to the object. OpenActivity fields for phone calls are only available if your organization uses Salesforce CRM Call Center.

Supported Calls

`describeSObjects()`

Fields

Field	Details
AccountId	Type reference Properties Filter, Group, Nillable, Sort Description Indicates the ID of the related account, which is determined as follows: • The account associated with the <code>whatId</code>, if it exists; or • The account associated with the <code>whoId</code>, if it exists; otherwise • <code>null</code> This is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
ActivityDate	Type date Properties Filter, Group, Nillable, Sort Description Indicates one of the following: • The due date of a task • The date of an event if <code>IsAllDayEvent</code> is set to <code>true</code> This field has a time stamp that is always set to midnight in the Universal Time Coordinated (UTC) time zone. The time stamp doesn't represent the time of the activity; don't attempt to alter it to accommodate time zone differences. Label is <code>Date</code>.
ActivityDateTime	Type dateTime Properties Aggregate, Filter, Nillable, Sort

Field	Details
	Description Contains the event's due date if the <code>IsAllDayEvent</code> flag is set to <code>false</code>. The time portion of this field is always transferred in the Coordinated Universal Time (UTC) time zone. Translate the time portion to or from a local time zone for the user or the application, as appropriate. Label is Due Date Time. The value for this field and <code>StartDateTime</code> must match, or one of them must be <code>null</code>.
<code>ActivitySubtype</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Provides standard subtypes to facilitate creating and searching for specific activity subtypes. This field isn't updateable. Possible values are: • Task • Email • Call • Event • LinkedIn —Available in API version 56.0 and later. • List Email
<code>ActivityType</code>	Type picklist Properties Filter, Group, Nillable, Sort Description Represents one of the following values: <code>Call</code>, <code>Email</code>, <code>Meeting</code>, or <code>Other</code>. Label is <code>Type</code>. These are default values, and can be changed. <code>ActivityType</code> is the union of <code>TaskType</code> and <code>EventType</code>. If the same activity appears in both dynamic picklists, duplicate activities appear. <code>TaskType</code> and <code>EventType</code> can each have a <code>Call</code> type. Internally, they are distinct from each other.
<code>AlternateDetailId</code>	Type reference Properties Filter, Group, Nillable, Sort Description The ID of a record the activity is related to which contains more details about the activity. For example, an activity can be related to an EmailMessage record.

Field	Details
	This is a relationship field. Relationship Name AlternateDetail Relationship Type Lookup Refers To EmailMessage
CallDisposition	Type string Properties Filter, Group, Nillable, Sort Description Represents the result of a given call, for example, “we’ll call back,” or “call unsuccessful.” Limit is 255 characters.
CallDurationInSeconds	Type int Properties Filter, Group, Nillable, Sort Description Duration of the call in seconds.
CallObject	Type string Properties Filter, Group, Nillable, Sort Description Name of a call center. Limit is 255 characters.
CallType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of call being answered: Inbound, Internal, or Outbound.
CompletedDateTime	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The date and time the task was saved with a Closed status. This value is always null.
ConnectionReceivedId	Type reference Properties Filter, Group, Nillable, Sort Description Indicates the ID of the PartnerNetworkConnection that shared this record with your organization. This field is available only if your organization has enabled Salesforce to Salesforce and only in API versions 28.0 and later.
ConnectionSentId	Type reference Properties Filter, Group, Nillable, Sort Description Indicates the ID of the PartnerNetworkConnection that your organization shared this record with. This field is available only if your organization has enabled Salesforce to Salesforce, and only in API versions 28.0 and later. The value is always null. You can use the PartnerNetworkRecordConnection object to forward records to connections.
Description	Type textarea Properties Nillable Description Contains a description of the event or task. Limit is 32 KB.
DurationInMinutes	Type int Properties Filter, Group, Nillable, Sort Description Indicates the duration of the event or task.
EndDateTime	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description Indicates the end date and time of the event or task. Available in versions 27.0 and later. This field is optional, depending on the following: • If <code>IsAllDayEvent</code> is <code>true</code>, you can supply a value for either <code>DurationInMinutes</code> or <code>EndTime</code>. Supplying values in both fields is allowed if the values add up to the same amount of time. If both fields are <code>null</code>, the duration defaults to one day. • If <code>IsAllDayEvent</code> is <code>false</code>, a value must be supplied for either <code>DurationInMinutes</code> or <code>EndTime</code>. Supplying values in both fields is allowed if the values add up to the same amount of time.
<code>IsAllDayEvent</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If the value of this field is set to <code>true</code>, then the activity is an event spanning a full day, and the <code>ActivityDate</code> defines the date of the event. If the value of this field is set to <code>false</code>, then the activity may be an event spanning less than a full day, or it may be a task. The default value of this field is <code>false</code>. Label is <code>All-Day Event</code>.
<code>IsClosed</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a task is closed (<code>true</code>) or not closed (<code>false</code>). The default value of this field is <code>false</code>. This field is set indirectly by setting <code>Status</code> on the task—each picklist value has a corresponding <code>IsClosed</code> value. Label is <code>Closed</code>.
<code>IsDeleted</code>	Type boolean Properties Defaulted on create, Filter Description Indicates whether the activity has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is <code>Deleted</code>.
<code>IsHighPriority</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Indicates a high-priority task. The default value of this field is <code>false</code>. This field is derived from the <code>Priority</code> field.
<code>IsReminderSet</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a reminder is set for an activity (<code>true</code>) or not (<code>false</code>). The default value of this field is <code>false</code>.
<code>IsTask</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If the value of this field is set to <code>true</code>, then the activity is a task; if the value is set to <code>false</code>, then the activity is an event. The default value of this field is <code>false</code>. Label is <code>Task</code>.
<code>IsVisibleInSelfService</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If the value of this field is set to <code>true</code>, then the activity can be viewed in the self-service portal. The default value of this field is <code>false</code>. Label is <code>Visible in Self-Service</code>.
<code>Location</code>	Type string Properties Filter, Group, Nillable, Sort Description If the activity is an event, then this field represents the location of the event. If the activity is a task, then the value is <code>null</code>.
<code>OwnerId</code>	Type reference Properties Filter, Group, Nillable, Sort Description Indicates the ID of the user or group who owns the activity.

Field	Details
	This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Calendar, Group, User
PrimaryAccountId	Type reference Properties Filter, Group, Nillable, Sort Description Contains the <code>AccountId</code> value from the activity record. Available in API versions 30.0 and later to organizations that use Shared Activities.
PrimaryWhoId	Type reference Properties Filter, Group, Nillable, Sort Description Contains the <code>whoId</code> value from the activity record. Available in API versions 30.0 and later to organizations that have enabled Shared Activities.
Priority	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Sort Description Indicates the priority of a task, such as high, normal, or low. The default value of this field is <code>Normal</code>.
ReminderDateTime	Type dateTime Properties Filter, Nillable, Sort Description Represents the time at which a reminder is scheduled to fire if <code>IsReminderSet</code> is set to <code>true</code>. If <code>IsReminderSet</code> is set to <code>false</code>, then either the user has deselected the reminder checkbox in the user interface or the reminder has already fired at the time indicated by the value.

Field	Details
Status	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Sort Description Indicates the current status of a task. The default value of this field is <code>Not Started</code>. Each predefined status field sets a value for <code>IsClosed</code>. To obtain picklist values, query the <code>TaskStatus</code> object. Possible values are: - Completed - Deferred - In Progress - Not Started - Waiting on someone else
Subject	Type combobox Properties Filter, Nillable, Sort Description Contains the subject of the task or event.
WhatId	Type reference Properties Filter, Group, Nillable, Sort Description The <code>WhatId</code> represents nonhuman objects such as accounts, opportunities, campaigns, cases, or custom objects. <code>WhatIds</code> are polymorphic. Polymorphic means a <code>WhatId</code> is equivalent to the ID of a related object. The label is <code>Related To ID</code>. This is a polymorphic relationship field. Relationship Name What Relationship Type Lookup Refers To Account, Accreditation, AssessmentIndicatorDefinition, AssessmentTask, AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskOrder, Asset, AssetRelationship, AssignedResource, Award, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, Campaign, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis,

Field	Details
	CareInterventionType, CareMetricTarget, CareObservation, CareObservationComponent, CarePgmProvHealthcareProvider, CarePreauth, CarePreauthItem, CareProgram, CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee, CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider, CareProgramTeamMember, CareProviderAdverseAction, CareProviderFacilitySpecialty, CareProviderSearchableField, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareSpecialtyTaxonomy, CareTaxonomy, Case, CommSubscriptionConsent, ContactEncounter, ContactEncounterParticipant, ContactRequest, Contract, CoverageBenefit, CoverageBenefitItem, CreditMemo, DelegatedAccount, DocumentChecklistItem, EnrollmentEligibilityCriteria, HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, IdentityDocument, Image, IndividualApplication, Invoice, ListEmail, Location, MemberPlan, Opportunity, Order, OtherComponentTask, PartyConsent, PersonLifeEvent, PlanBenefit, PlanBenefitItem, ProcessException, Product2, ProductItem, ProductRequest, ProductRequestLineItem, ProductTransfer, PurchaserPlan, ReceivedDocument, ResourceAbsence, ReturnOrder, ReturnOrderLineItem, ServiceAppointment, ServiceResource, Shift, Shipment, ShipmentItem, Solution, Visit, VisitedParty, VolunteerProject, WorkOrder, WorkOrderLineItem
WhoId	Type reference Properties Filter, Group, Nillable, Sort Description The Whold represents a human such as a lead or a contact. Wholds are polymorphic. Polymorphic means a Whold is equivalent to a contact's ID or a lead's ID. The label is <code>Name ID</code>. If Shared Activities is enabled, the value of this field is the ID of the related lead or primary contact. If you add, update, or remove the Whold field, you might encounter problems with triggers, workflows, and data validation rules that are associated with the record. The label is <code>Name ID</code>. This is a polymorphic relationship field. Relationship Name Who Relationship Type Lookup Refers To Contact, Lead

Usage

Query activities that are related to an object

1. Optionally, issue a describe call against the object whose activities you want to query, to get a suggestion of the correct SOQL query to use.
2. Issue a SOQL relationship query with a main clause that references the object and an inner clause that references the activity history. For example:

```
SELECT
  (SELECT ActivityDate, Description
   FROM OpenActivities)
FROM Account
WHERE Name Like 'XYZ%'
```

The user interface enforces sharing rules, filtering out related-list items that a user doesn't have permission to see.

The following constraints on users who don't have the "View All Data" permission help prevent performance issues.

- In the main clause of the relationship query, you can reference only one record. For example, you can't filter on all records where the account name starts with "A." Instead, you must reference a single account record.

```
SELECT
  (SELECT ActivityDate, Description
   FROM OpenActivities
   ORDER BY ActivityDate ASC NULLS LAST, LastModifiedDate DESC
   LIMIT 500)
FROM Account
WHERE Name = 'Acme'
LIMIT 1
```

- In the inner clause of the query, you can't use `WHERE`.
- In the inner clause of the query, you must specify a limit of 500 or fewer on the number of rows that are returned in the list.
- In the inner clause of the query, you must sort on `ActivityDate` in ascending order and `LastModifiedDate` in descending order. You can optionally display nulls last. For example: `ORDER BY ActivityDate ASC NULLS LAST, LastModifiedDate DESC`.

SEE ALSO:

[Task](#)

OperatingHours

Represents the hours in which a service territory, service resource, or account is available for work. OperatingHours is used by Field Service, Salesforce Scheduler, Salesforce Meetings, Sales Engagement, and Workforce Engagement. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
Description	Type textarea Properties Create, Nillable, Update Description The description of the operating hours. Add any details that aren't included in the name.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the operating hours record was last modified. Its label in the user interface is <code>Last Modified Date</code>.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the operating hours record was last viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the operating hours. For example, <i>Summer Hours</i>, <i>Winter Hours</i>, or <i>Peak Season Hours</i>.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of the operating hours record. This field is available in API version 59.0. This field is a polymorphic relationship field.

Field Name	Details
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
TimeZone	Type picklist
	Properties Create, Filter, Group, Restricted picklist, Sort, Update
	Description The time zone that the operating hours fall within.

Usage

By default, only System Administrators can view, create, and assign operating hours.

Service territory members—which are service resources who can work in the territory—automatically use their service territory’s operating hours. If a resource needs different operating hours than their territory, create separate operating hours for them from the Operating Hours tab. Then, select the desired hours in the `Operating Hours` lookup field on the service territory member detail page.

To view a service resource’s operating hours for a particular territory, navigate to their Service Territories related list and click the Member Number for the territory. You reach the service territory member detail page, which lists the member’s operating hours and dates during which they belong to the territory.

Associated Objects

This object has the following associated objects. Unless noted, they’re available in the same API version as this object.

OperatingHoursChangeEvent (API version 54.0)

Change events are available for the object.

OperatingHoursHistory (API version 62.0)

History is available for tracked fields of the object.

OperatingHoursHistory

Represents the history of changes made to tracked fields on an operating hours record. This object is available in API version 38.0 and later.

Supported Calls

`getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Special Access Rules

Field Service must be enabled in your organization, and field tracking for operating hours fields must be configured.

Fields

Field Name	Details
DataType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Data type of the field that was changed.
Field	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The name of the field that was changed.
NewValue	Type anyType Properties Nillable, Sort Description The new value of the field that was changed.
OldValue	Type anyType Properties Nillable, Sort Description The value of the field before it was changed.
TimeSlotId	Type reference Properties Filter, Group, Sort Description ID of the operating hours record being tracked. The history is displayed on the detail page for this record.

OperatingHoursHoliday

Represents the day or hours for which a service territory and service resources exclusive to the service territory are unavailable in Salesforce Scheduler. This object is available in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field	Details
DateAndTime	Type string Properties Filter, Group, Nillable, Sort Description (Read-Only) The date or time for the holiday.
HolidayId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the holiday that's related to the operating hours indicated in the OperatingHoursId field. This is a relationship field. Relationship Name Holiday Relationship Type Lookup Refers To Holiday
LastReferencedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The date and time that the current user last viewed a record related to this object.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this object.
OperatingHoursHolidayNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description (Read-Only) An auto-generated number identifying the operating hours holiday.
OperatingHoursId	Type reference Properties Create, Filter, Group, Sort Description The ID of the operating hours that's related to the holiday indicated in the HolidayId field. This is a relationship field. Relationship Name OperatingHours Relationship Type Lookup Refers To OperatingHours

Opportunity

Represents an opportunity, which is a sale or pending deal.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Field Type
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the account associated with this opportunity. This is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
ActivityMetricId	Type reference Properties Filter, Group, Nillable, Sort Description When Einstein Activity Capture with Activity Metrics is enabled, the ID of the related activity metric. This field is a relationship field. Relationship Name ActivityMetric Refers To ActivityMetric
ActivityMetricRollupId	Type reference Properties Filter, Group, Nillable, Sort Description When Einstein Activity Capture with Activity Metrics is enabled, the ID of the related activity metric rollup.

Field	Field Type
	This field is a relationship field. Relationship Name ActivityMetricRollup Refers To ActivityMetricRollup
AgeInDays	Type int Properties Aggregate, Filter, Group, Nillable, Sort Description The number of days since the opportunity was created, calculated by the current date minus the <code>created_date</code> field. This field is available in API version 52.0 and later if you enabled Pipeline Inspection.
Amount	Type currency Properties Create, Filter, Nillable, Sort, Update Description Estimated total sale amount. For opportunities with products, the amount is the sum of the related products. Any attempt to update this field, if the record has products, will be ignored. The update call will not be rejected, and other fields will be updated as specified, but the Amount will be unchanged.
CampaignId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of a related Campaign. This field is defined only for those organizations that have the campaign feature Campaigns enabled. The User must have read access rights to the cross-referenced Campaign object in order to create or update that campaign into this field on the opportunity. This is a relationship field. Relationship Name Campaign Relationship Type Lookup Refers To Campaign

Field	Field Type
CloseDate	Type date Properties Create, Filter, Group, Sort, Update Description Required. Date when the opportunity is expected to close.
ConnectionReceivedId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the PartnerNetworkConnection that shared this record with your organization. This field is available if you enabled Salesforce to Salesforce.
ConnectionSentId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the PartnerNetworkConnection that you shared this record with. This field is available if you enabled Salesforce to Salesforce. This field is supported using API versions earlier than 15.0. In all other API versions, this field's value is null. You can use the new PartnerNetworkRecordConnection object to forward records to connections.
ContactId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the contact associated with this opportunity, set as the primary contact. Read-only field that is derived from the opportunity contact role, which is created at the same time the opportunity is created. This field can only be populated when it's created, and can't be updated. To update the value in this field, change the <code>IsPrimary</code> flag on the OpportunityContactRole associated with this opportunity. Available in API version 46.0 and later.
ContractId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Field Type
	Description ID of the contract that's associated with this opportunity. This is a relationship field. Relationship Name Contract Relationship Type Lookup Refers To Contract
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for organizations with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization. If the organization has multicurrency and a Pricebook2 is specified on the opportunity (that is, the <code>Pricebook2Id</code> field is not blank), then the currency value of this field must match the currency of the PricebookEntry records that are associated with any opportunity line items it has.
Description	Type textarea Properties Create, Nillable, Update Description Text description of the opportunity. Limit: 32,000 characters.
ExpectedRevenue	Type currency Properties Filter, Nillable, Sort Description Read-only field that is equal to the product of the opportunity <code>Amount</code> field and the <code>Probability</code>. You can't directly set this field, but you can indirectly set it by setting the <code>Amount</code> or <code>Probability</code> fields.
ExportStatus	Type picklist Properties Filter, Restricted picklist, Sort

Field	Field Type
	Description Derived field for the record map for Partner Connect. The export status of this opportunity to the partner's connected org. To see this field, enable Partner Connect and add the Export Vendor Records to an Authorized Partner Org user permission to the cosell export user. See Set Up Partner Connect as a Vendor in <i>Salesforce Help</i>. Available in API version 62.0 and later.
Fiscal	Type string Properties Filter, Group, Nillable, Sort Description If fiscal years are not enabled, the name of the fiscal quarter or period in which the opportunity <code>CloseDate</code> falls. Use YYYY Q format, for example, '2006 1' for first quarter of 2006.
FiscalQuarter	Type int Properties Filter, Group, Nillable, Sort Description Represents the fiscal quarter. Valid values are 1, 2, 3, or 4.
FiscalYear	Type int Properties Filter, Group, Nillable, Sort Description Represents the fiscal year, for example, 2006.
ForecastCategory	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Restricted picklist field. It is implied, but not directly controlled, by the <code>StageName</code> field. You can override this field to a different value than is implied by the <code>StageName</code> value. The values of this field are fixed enumerated values. The field labels are localized to the language of the user performing the operation, if localized versions of those labels are available for that language in the user interface. In API version 12.0 and later, the value of this field is automatically set based on the value of the <code>ForecastCategoryName</code> and can't be updated any other way. The field properties Create, Defaulted on create, Nillable, and Update are not available in version 12.0. Possible values are:

Field	Field Type
	• BestCase • Closed • Forecast • MostLikely • Omitted • Pipeline
ForecastCategoryName	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The name of the forecast category. It is implied, but not directly controlled, by the <code>StageName</code> field. You can override this field to a different value than is implied by the <code>StageName</code> value. Available in API version 12.0 and later. Possible values are: • Best Case • Closed • Commit • Most Likely • Omitted • Pipeline
HasOpenActivity	Type boolean Properties Defaulted on create, Group, Description Indicates whether an opportunity has an open event or task (<code>true</code>) or not (<code>false</code>). Available in API version 35.0 and later.
HasOpportunityLineItem	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Read-only field that indicates whether the opportunity has associated line items. A value of <code>true</code> means that Opportunity line items have been created for the opportunity. An opportunity can have opportunity line items only if the opportunity has a price book. The opportunity line items must correspond to PricebookEntry objects that are listed in the opportunity Pricebook2. However, you can insert opportunity line items on an opportunity

Field	Field Type
	that does not have an associated Pricebook2. For the first opportunity line item that you insert on an opportunity without a Pricebook2, the API automatically sets the <code>Pricebook2Id</code> field, if the opportunity line item corresponds to a PricebookEntry in an active Pricebook2 that has a <code>CurrencyIsoCode</code> field that matches the <code>CurrencyIsoCode</code> field of the opportunity. If the Pricebook2 is not active or the <code>CurrencyIsoCode</code> fields do not match, then the API returns an error. You can't update the <code>Pricebook2Id</code> or <code>PricebookId</code> fields if opportunity line items exist on the Opportunity. You must delete the line items before attempting to update the <code>PricebookId</code> field.
HasOverdueTask	Type boolean Properties Defaulted on create, Group, Description Indicates whether an opportunity has an overdue task (<code>true</code>) or not (<code>false</code>). Available in API version 35.0 and later.
IqScore	Type int Properties Aggregate, Filter, Group, Nillable, Sort Description The likelihood, measured on a scale of 1 to 99, that an opportunity will be won. Einstein Opportunity Scoring must be enabled. Available in API version 41.0 and later. Label is Opportunity Score.
IsClosed	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Directly controlled by <code>StageName</code>. You can query and filter on this field, but you can't directly set it in a create, upsert, or update request. It can only be set via <code>StageName</code>. Label is Closed.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.

Field	Field Type
IsExcludedFromTerritory2Filter	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Used for Filter-Based Opportunity Territory Assignment (Pilot in Spring '15 / API version 33). Indicates whether the opportunity is excluded (<i>True</i>) or included (<i>False</i>) each time the APEX filter is executed.
IsPriorityRecord	Type boolean Properties Defaulted on create, Group Description Shows whether the user has marked the opportunity as important (<i>True</i>) or not (<i>False</i>). The default value is <code>false</code>. Available in API version 53.0 and later.
IsPrivate	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If <i>true</i>, only the opportunity owner, users above that role in the hierarchy, and admins can view the opportunity or query it via the API. When you mark opportunities as private, opportunity teams, opportunity splits, and sharing are removed. Label is Private. The default value is <i>False</i>.
IsSplit	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Read-only field that indicates whether credit for the opportunity is split between opportunity team members. Label is <code>IsSplit</code>. This field is available in versions 14.0 and later for organizations that enabled Opportunity Splits during the pilot period. This field should not be used. However, it's documented for the benefit of pilot customers who find references to <code>IsSplit</code> in code.
IsWon	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Field Type
	Description Directly controlled by <code>StageName</code> . You can query and filter on this field, but you can't directly set the value. It can only be set via <code>StageName</code> . Label is Won .
<code>LastActivityDate</code>	Type date Properties Filter, Group, Nillable, Sort Description Value is one of the following, whichever is the most recent: • Due date of the most recent event logged against the record. • Due date of the most recently closed task associated with the record.
<code>LastActivityInDays</code>	Type int Properties Aggregate, Filter, Group, Nillable, Sort Description The number of days since the last completed event or task for the record, calculated by the current date minus the <code>last_activity</code> field. If the <code>last_activity</code> field is null, this field is null. This field is available in API version 52.0 and later if you enabled Pipeline Inspection.
<code>LastAmountChangedHistoryId</code>	Type reference Properties Filter, Group, Nillable, Sort Description ID of the OpportunityHistory record that contains information about when the opportunity Amount field was last updated in Winter '21 or later. Information includes the date and time of the change and the user who made the change. Available in API version 50.0 and later. This is a relationship field. Relationship Name LastAmountChangedHistory Relationship Type Lookup Refers To OpportunityHistory
<code>LastCloseDateChangedHistoryId</code>	Type reference

Field	Field Type
	Properties Filter, Group, Nillable, Sort Description ID of the OpportunityHistory record that contains information about when the opportunity Close Date field was last updated in Winter '21 or later. Information includes the date and time of the change and the user who made the change. Available in API version 50.0 and later. This is a relationship field. Relationship Name LastCloseDateChangedHistory Relationship Type Lookup Refers To OpportunityHistory
LastReferencedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastStageChangeDate	Type datetime Properties Aggregate, Filter, Nillable, Sort Description The date of the last change made to the <code>Stage</code> field on this opportunity record. This field is available in API version 52.0 and later.
LastStageChangeInDays	Type int Properties Aggregate, Filter, Group, Nillable, Sort Description The number of days since the last change was made to the <code>Stage</code> field on the opportunity record, calculated by the current date minus the <code>last_stage_change_date</code> field. If the <code>last_stage_change_date</code> is null, then this field contains the value for <code>AgeInDays</code>. This field is available in API version 52.0 and later if you enabled Pipeline Inspection.

Field	Field Type
LastViewedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
LeadSource	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Source of this opportunity, such as Advertisement or Trade Show.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. A name for this opportunity. Limit: 120 characters.
NextStep	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of next task in closing opportunity. Limit: 255 characters.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the User who has been assigned to work this opportunity. If you update this field, the previous owner's access becomes Read Only or the access specified in your organization-wide default for opportunities, whichever is greater. If you have set up opportunity teams in your organization, updating this field has different consequences depending on your version of the API:

Field	Field Type
	- For API version 12.0 and later, sharing records are kept, as they are for all objects. (All previous opportunity team members are kept on the opportunity team.) - For API version before 12.0, sharing records are deleted. (All previous opportunity team members are removed from the opportunity team.) - For API version 16.0 and later, users must have the Transfer Record permission in order to update (transfer) account ownership using this field. This is a relationship field. Relationship Name Owner Relationship Type Lookup Refers To User
PartnerAccountId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the partner account for the partner user that owns this opportunity. Available if Partner Relationship Management is enabled or if digital experiences is enabled and you have partner portal licenses. If you are uploading opportunities using API version 15.0 or earlier, and one of the opportunities in the batch has a partner user as the owner, the <code>Partner Account</code> field on all opportunities in the batch is set to that partner user's account regardless of whether the partner user is the owner. In version 16.0, the <code>Partner Account</code> field is set to the appropriate account for the partner user that owns the opportunity. If the owner of the opportunity is not a partner user, this field remains empty.
Pricebook2Id	Type reference Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description ID of a related Pricebook2 object. The <code>Pricebook2Id</code> field indicates which Pricebook2 applies to this opportunity. The <code>Pricebook2Id</code> field is defined only for those organizations that have products enabled as a feature. You can specify values for only one field (<code>Pricebook2Id</code> or <code>PricebookId</code>)—not both fields. For this reason, both fields are declared nillable. This is a relationship field. Relationship Name Pricebook2

Field	Field Type
	Relationship Type Lookup
	Refers To Pricebook2
PricebookId	Type reference
	Properties Create, Defaulted on create, Filter, Nillable, Update
	Description Unavailable as of version 3.0. As of version 8.0, the Pricebook object is no longer available. Use the <code>Pricebook2Id</code> field instead, specifying the ID of the Pricebook2 record.
Probability	Type percent
	Properties Create, Defaulted on create, Filter, Nillable, Sort, Update
	Description Percentage of estimated confidence in closing the opportunity. It is implied, but not directly controlled, by the <code>StageName</code> field. You can override this field to a different value than what is implied by the <code>StageName</code> . If you're changing the <code>Probability</code> field through the API using a partner WSDL call, or an Apex <code>before</code> trigger, and the value may have several decimal places, we recommend rounding the value to a whole number. For example, the following Apex in a <code>before</code> trigger uses the <code>round</code> method to change the field value: <code>o.probability = o.probability.round();</code>
PushCount	Type int
	Properties Filter, Group, Nillable, Sort
	Description The number of times an opportunity's close date has been pushed out by one calendar month. For example, moving a close date from April to May counts as one push, but moving from April 1 to April 30 doesn't count. The total is not decreased when the close date is moved in. Available in API version 53.0 and later.
RecordTypeId	Type reference
	Properties Create, Filter, Nillable, Update

Field	Field Type
	Description ID of the record type assigned to this object.
StageName	Type picklist Properties Create, Filter, Group, Sort, Update Description Required. Current stage of this record. The <code>StageName</code> field controls several other fields on an opportunity. Each of the fields can be directly set or implied by changing the <code>StageName</code> field. In addition, the <code>StageName</code> field is a picklist, so it has additional members in the returned <code>describeSObjectResult</code> to indicate how it affects the other fields. To obtain the stage name values in the picklist, query the <code>OpportunityStage</code> object. If the <code>StageName</code> is updated, then the <code>ForecastCategoryName</code> , <code>IsClosed</code> , <code>IsWon</code> , and <code>Probability</code> are automatically updated based on the stage-category mapping.
SyncedQuoteID	Type reference Properties Create, Filter, Nillable, Update Description Read only in an Apex trigger. The ID of the Quote that syncs with the opportunity. Setting this field lets you start and stop syncing between the opportunity and a quote. The ID has to be for a quote that is a child of the opportunity.
Territory2Id	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the territory that is assigned to the opportunity. Available only if Enterprise Territory Management has been enabled for your organization. Users who have full access to an opportunity's account can assign any territory from the active model to the opportunity. Users who do <i>not</i> can assign only a territory that is also assigned to the opportunity's account. The same restriction applies to territory assignments made via Apex in system mode.
TotalOpportunityQuantity	Type double Properties Create, Filter, Nillable, Sort, Update Description Number of items included in this opportunity. Used in quantity-based forecasting.

Field	Field Type
Type	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Type of opportunity. For example, Existing Business or New Business. Label is Opportunity Type .

 **Note:** When importing opportunity data, users need the Set Audit Fields upon Record Creation permission to assign values to audit fields such as `CreatedDate`. Audit fields are automatically updated during API operations unless you set these fields yourself.

Usage

Use the Opportunity object to manage information about a sale or pending deal. You can also sync this object with a child Quote. To update an Opportunity, your client application needs Edit permission on opportunities. You can create, update, delete, and query Attachment records associated with an opportunity via the API. To split credit for an opportunity among multiple opportunity team members, use the OpportunitySplit object.

Client applications can also create or update opportunity objects by converting a Lead with `convertLead()`.

 **Note:** On opportunities and opportunity products, the workflow rules, validation rules, and Apex triggers fire when an update to a child opportunity product or schedule causes an update to the parent record. This means your custom application logic is enforced when there are updates to the parent record, ensuring higher data quality and compliance with your organization's business policies.

Sample Code—Java

This code starts the sync between an object and a child quote.

```
public void startQuoteSync() {
    Opportunity opp = new Opportunity();
    opp.setId(new ID("006D000000CpOSy"));
    opp.setSyncedQuoteId(new ID("0Q0D0000000020Z"));
    // Invoke the update call and save the results
    try {
        SaveResult[] saveResults = binding.update(new SObject[] {opp});
        // check results and do more processing after the update call ...
    }
    catch (Exception ex) {
        System.out.println("An unexpected error has occurred." + ex.getMessage());
        return;
    }
}
```

This code stops the sync between an object and a child quote.

```
public void stopQuoteSync() {
    Opportunity opp = new Opportunity();
    opp.setId(new ID("006D000000CpOSy"));
    opp.setFieldsToNull(new String[] { "SyncedQuoteId" } );
    // Invoke the update call and save the results
    try {
        SaveResult[] saveResults = binding.update(new SObject[] {opp});
        // check results and do more processing after the update call ...
    }
    catch (Exception ex) {
        System.out.println("An unexpected error has occurred." + ex.getMessage());
        return;
    }
}
```

Associated Objects

This object has these associated objects. Unless noted, they are available in the same API version as this object.

OpportunityChangeEvent (API version 44.0)

Change events are available for the object.

OpportunityFeed (API version 18.0)

Feed tracking is available for the object.

OpportunityHistory

History is available for tracked fields of the object.

OpportunityOwnerSharingRule

Sharing rules are available for the object.

OpportunityShare

Sharing is available for the object.

Additional Considerations

If you are using `before` triggers to set `Stage` and `Forecast Category` for an opportunity record, the behavior is as follows:

- If you set `Stage` and `Forecast Category`, the opportunity record contains those exact values.
- If you set `Stage` but not `Forecast Category`, the `Forecast Category` value on the opportunity record defaults to the one associated with trigger `Stage`.
- If you reset `Stage` to a value specified in an API call or incoming from the user interface, the `Forecast Category` value should also come from the API call or user interface. If no value for `Forecast Category` is specified and the incoming `Stage` is different than the trigger `Stage`, the `Forecast Category` defaults to the one associated with trigger `Stage`. If the trigger `Stage` and incoming `Stage` are the same, the `Forecast Category` is not defaulted.

If you are cloning an opportunity with products, the following events occur in order:

-  **Note:** If errors occur on an opportunity product, you must return to the opportunity and fix the errors before cloning.
If any opportunity products contain unique custom fields, you must null them out before cloning the opportunity.
- The parent opportunity is saved according to the [order of execution](#).

- The opportunity products are saved according to the [order of execution](#).

SEE ALSO:

- [OpportunityCompetitor](#)
- [OpportunityHistory](#)
- [OpportunityLineItem](#)
- [OpportunityLineItemSchedule](#)
- [OpportunityFieldHistory](#)
- [Quote](#)
- [QuoteLineItem](#)
- [PartnerNetworkConnection](#)

OpportunityCompetitor

Represents a competitor on an Opportunity.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
CompetitorName	Type combobox Properties Create, Filter, Nillable, Sort, Update Description Name of the competitor.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
OpportunityId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort Description Required. ID of the associated Opportunity. This is a relationship field. Relationship Name Opportunity Relationship Type Lookup Refers To Opportunity
Strengths	Type string Properties Create, Filter, Nillable, Sort, Update Description Description of the competitor's strengths. Limit: 1,000 characters.
Weaknesses	Type string Properties Create, Filter, Nillable, Sort, Update Description Description of the competitor's weaknesses. Limit: 1,000 characters.

Usage

Use this object to manage competitors on an Opportunity, associating multiple competitors on a opportunity and specifying the strengths and weaknesses of each competitor.

SEE ALSO:

[Opportunity](#)

OpportunityContactRole

Represents the role that a Contact plays on an Opportunity.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
ContactId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of an associated Contact. The API applies user access rights to the associated Opportunity for this object, but not to the associated Contact. The API may return rows from a query on this object that include this field's values for contacts to which the user does not have sufficient access rights. It may also return values for this field for contacts that have been deleted. In either case, the client must perform a query on the contact table for this field's value to determine whether the Contact is accessible to the user and has not been deleted. This is a relationship field. Relationship Name Contact Relationship Type Lookup Refers To Contact
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the org. This field is available in API version 47.0.
Division	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description A logical segment of your organization's data. For example, if your company is organized into different business units, you could create a division for each business unit, such as "North

Field	Details
	America," "Healthcare," or "Consulting." Available only if the organization has the Division permission enabled.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the record has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). The <code>IsDeleted</code> flag is usable only when the parent record is deleted to the recycle bin, and not when the <code>OpportunityContactRole</code> record is deleted directly. Label is Deleted.
IsPrimary	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the associated Contact plays the primary role on the Opportunity (<code>true</code>) or not (<code>false</code>). Each Opportunity has only one primary contact. Label is Primary.
OpportunityId	Type reference Properties Create, Filter, Group, Sort Description Required. ID of an associated Opportunity. This field is non-nullable, and it cannot be updated. You must provide a value for this field when creating new records. You can't change it after it has been created. This is a relationship field. Relationship Name Opportunity Relationship Type Lookup Refers To Opportunity
Role	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description Name of the role played by the associated Contact on the Opportunity, such as Business User or Decision Maker.

Usage

Use the Opportunity Contact Role object to manage information about contacts and roles related to opportunities. Records of this type appear in the user interface in the Opportunity Contact Role related list and on the Opportunity detail page.

Although allowed, we do not recommend that you create multiple relationships between the same Opportunity and a Contact.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

OpportunityContactRoleChangeEvent (API version 45.0)

Change events are available for the object.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

OpportunityContactRoleSuggestionInsight

Represents a suggestion for a new opportunity contact role. Available in API versions 45.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getDeleted()`, `query()`, `retrieve()`

Special Access Rules

To add or decline opportunity contact role suggestions, users need a Sales Cloud Einstein license, edit access on opportunities, and read or edit access on contacts. As of the Spring '20 release, Pardot and Sales Engagement users no longer have access to this object.

Fields

Field Name	Details
ContactId	Type reference Properties Filter, Group, Sort

Field Name	Details
	Description The ID of the related contact record.
CreatedRecordId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the created opportunity contact role record.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
Division	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The division of the suggested opportunity contact role.
LastOperationUserId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user who last performed a related operation.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last interacted with this record, directly or indirectly.
LastViewedDate	Type dateTime

Field Name	Details
	Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (<code>LastReferencedDate</code>), but not viewed it.
OpportunityId	Type reference Properties Filter, Group, Sort Description The ID of the related opportunity.
RationaleLabel	Type string Properties Filter, Group, Nillable, Sort Description The reason why this is a suggested opportunity contact role.
Role	Type string Properties Filter, Group, Nillable, Sort Description The role of the suggested opportunity contact role.
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The status of the suggested contact. Possible values include: • New • Pending • Added • Declined

Usage

This object is read-only and isn't supported in workflows, triggers, or process builder.

OpportunityFieldHistory

Represents the history of changes to the values in the fields of an opportunity. This object is available in versions 13.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Fields

Field	Details
<code>DataType</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Data type of the field that was changed.
<code>Field</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The name of the field that was changed.
<code>IsDeleted</code>	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
<code>OpportunityId</code>	Type reference Properties Filter, Group, Sort

Field	Details
	Description ID of the Opportunity. Label is Opportunity ID. This is a relationship field. Relationship Name Opportunity Relationship Type Lookup Refers To Opportunity
NewValue	Type anyType Properties Nillable, Sort Description The new value of the field that was changed.
OldValue	Type anyType Properties Nillable, Sort Description The latest value of the field before it was changed.

Usage

Use this object to identify changes to any fields on an Opportunity. The OpportunityHistory object represents the history of a change to the `Amount`, `Probability`, `Stage`, or `Close Date` fields of an Opportunity.

This object respects field level security on the parent object.

SEE ALSO:

[Opportunity](#)

OpportunityHistory

Represents the stage history of an opportunity.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
Amount	Type currency Properties Filter, Nillable, Sort Description Estimated total sale amount.
CloseDate	Type date Properties Filter, Group, Nillable, Sort Description Date when the opportunity is expected to close.
ExpectedRevenue	Type currency Properties Filter, Nillable, Sort Description Calculated revenue based on the <code>Amount</code> and <code>Probability</code> fields.
ForecastCategory	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Category that determines the column in which an opportunity is totaled in a forecast. Label is To ForecastCategory. • BestCase • Closed • Forecast • MostLikely • Omitted • Pipeline
IsDeleted	Type boolean Properties Defaulted on create, Filter

Field	Details
	Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
OpportunityId	Type reference Properties Filter, Group, Sort Description ID of the associated Opportunity. This is a relationship field. Relationship Name Opportunity Relationship Type Lookup Refers To Opportunity
PrevAmount	Type currency Properties Filter, Nillable, Sort Description The value in the opportunity's Amount field before the update of the opportunity. In OpportunityHistory records created before Winter '21, the value is null. Available in API version 50.0 and later.
PrevCloseDate	Type date Properties Filter, Group, Nillable, Sort Description The value in the opportunity's Close Date field before the update of the opportunity. In OpportunityHistory records created before Winter '21, the value is null. Available in API version 50.0 and later.
Probability	Type percent Properties Filter, Nillable, Sort Description Percentage of estimated confidence in closing the opportunity.

Field	Details
StageName	Type picklist Properties Filter, Group, Sort Description Name of the current stage of the opportunity (for example, Prospect or Proposal).

Usage

This object represents the history of a change to the `Amount`, `Probability`, `Stage`, or `Close Date` fields of an Opportunity. The `OpportunityFieldHistory` object represents the history of a change to any of the fields of an Opportunity. To obtain information about how a particular opportunity is progressing, query the `OpportunityHistory` records associated with a given Opportunity. Please note that if an opportunity's `Amount`, `Probability`, `Stage`, or `Close Date` fields have not changed, nothing will be returned in the `OpportunityHistory` objects. In this case, query the `OpportunityFieldHistory` records associated with a given Opportunity to get more information about changes to the opportunity.

This object is read-only. The system generates a new record whenever a user or client application changes the value of any of the above fields; the then-current values of all of these major fields are saved in the newly-generated object.

This object respects field-level security on the parent object.



Note: The record is automatically deleted if its parent Opportunity is deleted.

SEE ALSO:

[Opportunity](#)

OpportunityInsight

Represents an individual insight (deal prediction, follow-up reminder, or key moment) related to an opportunity record.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `query()`, `retrieve()`

Special Access Rules

To see an insight related to a specific opportunity, users need a Sales Cloud Einstein license and access to the opportunity record. As of the Spring '20 release, Pardot and Sales Engagement users no longer have access to this object.

Fields

Field Name	Details
ActualHeardWithinDays	Type int Properties Filter, Group, Nillable, Sort Description The number of days it has been since a prospect has responded for insights of type Prospect has not responded and No communication.
CloseDate	Type dateTime Properties Filter, Nillable, Sort Description The close date of the related opportunity for insights of type Opportunity is overdue and Opportunity is unlikely to close in time.
CompetitorName	Type string Properties Filter, Group, Nillable, Sort Description This field has been deprecated as of API version 45.0.
ContactName	Type string Properties Filter, Group, Nillable, Sort Description This field is not in use as of API version 46.0.
ContactTitle	Type string Properties Filter, Group, Nillable, Sort Description This field is not in use as of API version 46.0.
CurrencyIsoCode	Type picklist

Field Name	Details
	Properties Defaulted on create, Filter, Group, Restricted picklist, Sort
	Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
Division	Type picklist
	Properties Defaulted on create, Filter, Group, Restricted picklist, Sort
	Description The division of the related record.
ExpectedHeardWithinDays	Type int
	Properties Filter, Group, Nillable, Sort
	Description The expected number of days it takes to hear back from a prospect for insights of type <code>Prospect has not responded</code> and <code>No communication</code> .
LastHeard	Type dateTime
	Properties Filter, Nillable, Sort
	Description The date when the related prospect was last heard from for insights of type <code>Prospect has not responded</code> .
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp when the current user last interacted with this record, directly or indirectly.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort

Field Name	Details
	Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (LastReferencedDate), but not viewed it.
OpportunityId	Type reference Properties Filter, Group, Sort Description The ID of the related opportunity record.
Rationale	Type string Properties Filter, Group, Nillable Description The explanation for an insight, providing more background information and details that are specific to the org.
Reason	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The reason why a specific insight type is appearing. Relevant to the following insights: • Opportunity is unlikely to close in time • Opportunity slowing • Opportunity boosting • Time-consuming opportunity
TaskDue	Type dateTime Properties Filter, Nillable, Sort Description The date that a task associated with the related opportunity record is due.
Title	Type string

Field Name	Details
	Properties Filter, Group, Nillable Description The title of the insight.
TrendType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The trend type of the insight. Possible values include: • Negative • Positive • Informational
Type	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of insight. Possible values include: • Opportunity is unlikely to close in time • Prospect has not responded • Opportunity slowing • Opportunity boosting • Time-consuming opportunity • No communication • Re-engaged opportunity • Opportunity has an overdue task • Opportunity is overdue • Opportunity has no open activity • Unusual opportunity amount

Usage

This object is read-only and isn't supported in workflows, triggers, or process builder.

OpportunityLineItem

Represents an opportunity line item, which is a member of the list of Product2 products associated with an Opportunity.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

The user must have the “Edit” permission on Opportunity records to create or update opportunity line items on an opportunity.

Fields

Field	Details
CanUseQuantitySchedule	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the opportunity product can have a quantity schedule (<code>true</code>) or not (<code>false</code>). This field is read-only.
CanUseRevenueSchedule	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the opportunity product can have a revenue schedule (<code>true</code>) or not (<code>false</code>). This field is read-only.
ConnectionReceivedId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the PartnerNetworkConnection that shared this record with your organization. This field is available if you enabled Salesforce to Salesforce.
ConnectionSentId	Type reference

Field	Details
	Properties Filter, Group, Nillable, Sort Description ID of the PartnerNetworkConnection that you shared this record with. This field is available if you enabled Salesforce to Salesforce. This field is supported using API versions earlier than 15.0. In all other API versions, this field's value is null. You can use the new PartnerNetworkRecordConnection object to forward records to connections.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Available only for organizations with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization. If the organization has multicurrency enabled, and a Pricebook2 isn't specified on the parent opportunity (that is, the Pricebook2Id field is blank on the opportunity referenced by this object's OpportunityId), then the value of this field must match the currency of the CurrencyIsoCode field on the PricebookEntry records that are associated with this object.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Text description of the opportunity line item. Limit: 255 characters.
Discount	Type percent Properties Create, Filter, Nillable, Sort, Update Description Discount for the product as a percentage. When updating these records: - If you specify Discount without specifying TotalPrice, the TotalPrice is adjusted to accommodate the new Discount value, and the UnitPrice is held constant. - If you specify both Discount and Quantity, you must also specify either TotalPrice or UnitPrice so the system knows which one to automatically adjust.

Field	Details
HasQuantitySchedule	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Read-only. Indicates whether a quantity schedule has been created for this object (<code>true</code>) or not (<code>false</code>).
HasRevenueSchedule	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a revenue schedule has been created for this object (<code>true</code>) or not (<code>false</code>). If this object has a revenue schedule, the <code>Quantity</code> and <code>TotalPrice</code> fields can't be updated. In addition, the <code>Quantity</code> field can't be updated if this object has a quantity schedule. Update requests aren't rejected but the updated values are ignored.
HasSchedule	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If either <code>HasQuantitySchedule</code> or <code>HasRevenueSchedule</code> is <code>true</code>, this field is also <code>true</code>.
LastReferencedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record. Available in API version 50.0 and later.
LastViewedDate	Type datetime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed. Available in API version 50.0 and later.
ListPrice	Type currency Properties Filter, Nillable, Sort Description Corresponds to the <code>UnitPrice</code> on the PricebookEntry that is associated with this line item, which can be in the standard price book or a custom price book. A client application can use this information to show whether the unit price (or sales price) of the line item differs from the price book entry list price.
Name	Type string Properties Filter, Nillable, Sort Description The opportunity line item name (known as “Opportunity Product” in the user interface). This read-only field is available in API version 30.0 and later.
OpportunityId	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the associated Opportunity. This is a relationship field. Relationship Name Opportunity Relationship Type Lookup Refers To Opportunity
PricebookEntryId	Type reference Properties Create, Filter, Group, Nillable, Sort

Field	Details
	Description Required. ID of the associated PricebookEntry. Exists only for those organizations that have Products enabled as a feature. In API versions 1.0 and 2.0, you can specify values for either this field or <code>ProductId</code>, but not both. For this reason, both fields are declared nillable. In API version 3.0 and later, you must specify values for this field instead of <code>ProductId</code>. This is a relationship field. Relationship Name PricebookEntry Relationship Type Lookup Refers To PricebookEntry
ProductId	Type reference Properties Create, Filter, Nillable Description ID of the related Product record. This field is unavailable as of version 3.0 and is only provided for backward compatibility. The Product object is unavailable beginning with version 8.0. Use the <code>PricebookEntryId</code> field instead, specifying the ID of the PricebookEntry record. This is a relationship field. Relationship Name Product2 Relationship Type Lookup Refers To Product2
Product2Id	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the related Product2 record. This is a read-only field available in API version 30.0 and later. Use the <code>PricebookEntryId</code> field instead, specifying the ID of the PricebookEntry record.
ProductCode	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description This read-only field is available in API version 30.0 and later. It references the value in the ProductCode field of the related Product2 record.
Quantity	Type double Properties Create, Filter, Sort, Update Description Read-only if this record has a quantity schedule, a revenue schedule, or both a quantity and a revenue schedule. When updating these records: • If you specify <code>Quantity</code> without specifying the <code>UnitPrice</code>, the <code>UnitPrice</code> value is adjusted to accommodate the new <code>Quantity</code> value, and the <code>TotalPrice</code> is held constant. • If you specify both <code>Discount</code> and <code>Quantity</code>, you must also specify either <code>TotalPrice</code> or <code>UnitPrice</code> so the system can determine which one to automatically adjust.
RecalculateTotalPrice	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Changes behavior of OpportunityLineItem calculations when a line item has child schedule rows for the <code>Quantity</code> value. When enabled, if the rollup quantity changes, then the quantity rollup value is multiplied against the sales price to change the total price. Product2 flag must be set to true.
ServiceDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Date when the product revenue will be recognized and the product quantity will be shipped. • Opportunity Close Date—<code>ServiceDate</code> is ignored. • Product Date—<code>ServiceDate</code> is used if not null. • Schedule Date—<code>ServiceDate</code> is used if not null and there are no revenue schedules present for this line item, that is, there are no OpportunityLineItemSchedule records with a field <code>Type</code> value of Revenue that are children of this record.

Field	Details
SortOrder	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Number indicating the sort order selected by the user. Client applications can use this to match the sort order in Salesforce.
Subtotal	Type currency Properties Filter, Nillable, Sort Description Difference between standard and discounted pricing. Converted currency amounts when the opportunity's currency is different from the user's currency.
TotalPrice	Type currency Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description This field is available only for backward compatibility. It represents the total price of the OpportunityLineItem. If you don't specify <code>UnitPrice</code>, this field is required. If you specify <code>Discount</code> and <code>Quantity</code>, this field or <code>UnitPrice</code> is required. When updating these records, you can change either this value or the <code>UnitPrice</code>, but not both at the same time. This field is nillable, but you can't set both <code>TotalPrice</code> and <code>UnitPrice</code> to null in the same update request. To insert the <code>TotalPrice</code> via the API (given only a unit price and the quantity), calculate this field as the unit price multiplied by the quantity. This field is read-only if the opportunity line item has a revenue schedule. If the opportunity line item doesn't have a schedule or only has a quantity schedule, this field can be updated.
UnitPrice	Type currency Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description The unit price for the opportunity line item. In the Salesforce user interface, this field's value is calculated by dividing the total price of the opportunity line item by the quantity listed for that line item. Label is Sales Price. This field or <code>TotalPrice</code> is required. You can't specify both. If you specify <code>Discount</code> and <code>Quantity</code>, this field or <code>TotalPrice</code> is required.

Usage

An Opportunity can have associated OpportunityLineItem records only if the Opportunity has a Pricebook2. An OpportunityLineItem must correspond to a Product2 that is listed in the opportunity's Pricebook2. For information about inserting OpportunityLineItem for an opportunity that doesn't have an associated Pricebook2 or any existing line items, see [Effects on Opportunities](#).

This object is defined only for orgs with products enabled as a feature. If the products feature isn't enabled, this object doesn't appear in the `describeGlobal()` call, and you can't use `describeObjects()` or query the OpportunityLineItem object.

For a visual diagram of the relationships between OpportunityLineItem and other objects, see the [Product & Price Book](#) diagram.

Note:

- If the multicurrency option is enabled, the `CurrencyIsoCode` field is present. It can't be modified, and is always set to the value of the `CurrencyIsoCode` of the parent Opportunity.
- If customizable product schedules are enabled, you can use custom fields in default schedules and customize their layout. But if you've applied validation rules or Apex triggers, they're bypassed when they're first inserted.

Effects on Opportunities

Opportunities with associated OpportunityLineItem records are affected in the following ways:

- Creating an OpportunityLineItem increments the Opportunity `Amount` value by the `TotalPrice` of the OpportunityLineItem. Additionally, inserting an OpportunityLineItem increments the `ExpectedRevenue` on the opportunity by the `TotalPrice` times the opportunity `Probability`.
- The Opportunity `Amount` becomes a read-only field when the opportunity has line items. The API ignores any attempt to update this field on an opportunity with line items. Update requests aren't rejected, but the updated value is ignored.
- You can't update the `PricebookId` field or the `CurrencyIsoCode` field on the opportunity if line items exist. The API rejects any attempt to update these fields on an opportunity with line items.
- When you create or update an OpportunityLineItem, the API verifies that the line item corresponds to a PricebookEntry in the Pricebook2 associated with the opportunity.
 - If the opportunity has an associated active or inactive Pricebook2, the OpportunityLineItem is created or updated.
 - If the opportunity doesn't have an associated Pricebook2, but the OpportunityLineItem corresponds to a PricebookEntry in an active Pricebook2 where the PricebookEntry has a `CurrencyIsoCode` value that matches the `CurrencyIsoCode` value of the opportunity, the API automatically sets this PriceBook2 on the opportunity.
 - If the opportunity doesn't have an associated Pricebook2, but the line item corresponds to a PricebookEntry in a Pricebook2 that isn't active or that has a `CurrencyIsoCode` value that does not match the `CurrencyIsoCode` value of the opportunity, an error is returned.
- The Opportunity `HasOpportunityLineItem` field is set to `true` when an OpportunityLineItem is inserted for that Opportunity.
- When OpportunityLineItem records are directly deleted, they aren't sent to the recycle bin and can't be undeleted. The `getDeleted()` call shows deleted OpportunityLineItem records until they're purged, which is usually within the same day or the next day.
- In Lightning, the `ListPrice`, `Name`, and `ProductCode` fields aren't populated before insert because their values are computed after the OpportunityLineItem.Product2Id value is saved. To access a value from these fields, use an After Insert trigger.

Associated Objects

This object has the following associated objects. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

OpportunityLineItemChangeEvent (API version 60.0)

Change events are available for the object.

SEE ALSO:

[OpportunityLineItemSchedule](#)

OpportunityLineItemSchedule

Represents information about the quantity, revenue distribution, and delivery dates for a particular `OpportunityLineItem`.

In API version 38.0 and later, when an `OpportunityLineItem` record is created for a product with a previously established schedule, an `OpportunityLineItemSchedule` record is also created.

In API version 46.0 and later, this object supports custom fields, validation rules, and Apex triggers. Deleting a schedule now also invokes delete triggers. If customizable product schedules are enabled, you can use custom fields in default schedules and customize their layout. But if you’ve applied validation rules or Apex triggers, they’re bypassed when they’re first inserted.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Nillable, Restricted picklist, Update Description Available only for organizations with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization. This field is available in version 10.0 and later.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Text description of the opportunity line item schedule. Limit: 80 characters. Label is Comments.

Field	Details
OpportunityLineItemId	Type reference Properties Create, Filter Description Required. ID of the associated OpportunityLineItem.
Quantity	Type double Properties Create, Filter, Nillable, Sort, Update Description Required. The total number of units to be scheduled in a quantity schedule.
Revenue	Type currency Properties Create, Filter, Nillable, Sort, Update Description The revenue that should be recognized, or the quantity that should be shipped, or both - depending upon the value of Type.
ScheduleDate	Type date Properties Create, Filter, Group, Sort, Update Description Required. The date the associated OpportunityLineItem is to be scheduled for an event: delivery, shipping, or any other date you wish to track.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The type of the schedule. Required when inserting an OpportunityLineItemSchedule. Valid values include Quantity, Revenue, or Both.

Allowed Type Field Values

The allowed `Type` values for an `OpportunityLineItemSchedule` depend on the product-level schedule preferences and whether the line item has any existing schedules. The following criteria must be met:

- The `Product2` on which the `OpportunityLineItem` is based must have the appropriate `CanUseRevenueSchedule` or `CanUseQuantitySchedule` fields (or both) set to `true`.
- When you create a schedule for a line item that does not have any existing schedules, you can specify any valid value.
- If you create a schedule for a line item that already has existing schedules, the new schedule must be consistent with the existing schedules. The following matrix outlines the allowable values:

Value of <code>HasRevenueSchedule</code> on line item	Value of <code>HasQuantitySchedule</code> on line item	Allowable Type Values
false	false	Revenue, Quantity, both
false	true	Quantity
true	false	Revenue
true	true	both

Allowed Quantity and Revenue Field Values

The allowable `Quantity` and `Revenue` field values depend on the value of the `Type` field:

Type Value	Allowable Quantity Value	Allowable Revenue Value
Revenue	Null	Non-null
Quantity	Non-null	Null
both	Non-null	Non-null

The `Quantity` and `Revenue` fields have the following restrictions when this object is updated:

- For a schedule of `Type Quantity`, you can't update a null `Revenue` value to non-null. Likewise for a schedule of `Type Revenue`, you can't update a null `Quantity` value to non-null.
- You can't null out the `Quantity` field for a schedule of `Type Quantity`. Likewise you can't null out the `Revenue` field for a schedule of `Type Revenue`.
- You can't null out either the `Revenue` or `Quantity` fields for a schedule of type `Both`.

Usage

`OpportunityLineItemSchedule` supports two types of schedules:

- Quantity schedules
- Revenue schedules

The user must have edit access rights on the `Opportunity` in order to create or update line item schedules on that opportunity.

Products and Schedules Must Be Enabled

The `OpportunityLineItemSchedule` object is defined only for those organizations that have the products and schedules features enabled. If the organization does not have the products and schedules features, the `OpportunityLineItemSchedule` object is not returned in a describe, and you can't describe or query `OpportunityLineItemSchedule` records.

Effects on Opportunities and Opportunity Line Items

`OpportunityLineItemSchedule` records affect opportunities and opportunity line items in the following ways:

- Inserting an `OpportunityLineItemSchedule` of Type "Revenue" or "Quantity" increments the `TotalPrice` field on the `OpportunityLineItem` by the `OpportunityLineItemSchedule Revenue` amount. Inserting an `OpportunityLineItemSchedule` of Type `Quantity` or `Both` increments the `Quantity` field on the `OpportunityLineItem` by the `OpportunityLineItemSchedule Quantity` amount.
- Creating an `OpportunityLineItemSchedule` record affects the original opportunity:
 1. The `Opportunity Amount` is incremented the by `OpportunityLineItemSchedule revenue` amount
 2. The `Opportunity ExpectedRevenue` is incremented by the line item schedule amount multiplied by the `Opportunity Probability`
- Deleting an `OpportunityLineItemSchedule` has a similar effect on the related `OpportunityLineItem` and `Opportunity`. Deleting an `OpportunityLineItemSchedule` decrements the `OpportunityLineItemTotalPrice` by the deleted `OpportunityLineItemSchedule Quantity` or `Revenue` amount. The `Opportunity Amount` is also decremented by the `OpportunityLineItemSchedule Quantity` or `Revenue` amount, and the `Opportunity ExpectedRevenue` is reduced by `OpportunityLineItemSchedule Quantity` or `Revenue` amount multiplied by the `Opportunity Probability`.

Deleting an Opportunity Line Item Schedule

Deleting the last remaining schedule will set the corresponding `HasQuantitySchedule` or `HasRevenueSchedule` flags (or both) to `false` on the parent line item.

SEE ALSO:

[OpportunityLineItem](#)

[Product2](#)

OpportunityLineItemSplit

Represents information about an opportunity product split, including percentages, amounts, and owner. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Before creating OpportunityLineItemSplit records, enable Team Selling, set up opportunity splits, and enable product splits on at least one opportunity split type in Setup.

Fields

Field	Details
ArchivedTerritoryName	Type String Properties Filter, Group, Nillable, Sort Description The name of the associated territory that's on an archived territory model. If the OpportunityLineItemSplit isn't associated with a territory on an archived territory model, the field value is null. This field is available in API version 62.0 and later.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Available only for organizations with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization. If the organization has multicurrency enabled, and a Pricebook2 is specified on the opportunity (that is, the Pricebook2Id field isn't blank on the opportunity referenced by this object's OpportunityId), then the value of this field must match the currency of the CurrencyIsoCode field on the PricebookEntry records that are associated with this object. Possible values are: • BRL—Brazilian Real • CAD—Canadian Dollar • EUR—Euro • USD—U.S. Dollar The default value is USD.
OpportunityLineItemId	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the associated parent OpportunityLineItem. This field is a relationship field.

Field	Details
	Relationship Name OpportunityLineItem Relationship Type Lookup Refers To OpportunityLineItem
Split	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Read-only. Automatically generated number identifying the split within the opportunity.
SplitAmount	Type currency Properties Filter, Nillable, Sort Description The amount or value of the split.
SplitNote	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Optional text about the split.
SplitOwnerId	Type reference Properties Create, Filter, Group, Sort Description ID of the user who is the owner of the split. This field is a relationship field. Relationship Name SplitOwner Relationship Type Lookup Refers To User

Field	Details
SplitPercentage	Type percent Properties Create, Filter, Sort, Update Description The percentage of the OpportunityLineItem's value that the split represents.
SplitTypeId	Type reference Properties Create, Filter, Group, Sort Description ID of the associated OpptyLineItemSplitType. This field is a relationship field. Relationship Name SplitType Relationship Type Lookup Refers To OpptyLineItemSplitType
Territory2Id	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the associated territory. This field is a relationship field, and is available in API version 62.0 and later. Relationship Name Territory2 Relationship Type Lookup Refers To Territory2

Usage

Use the OpportunityLineItemSplit object to manage opportunity product splits for an opportunity.

Associated Objects

This object has the following associated objects. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

[OpportunityLineItemSplitHistory](#) on page 63 (API version 59.0)

History is available for tracked fields of the object.

OpportunityOwnerSharingRule

Represents a rule for sharing an opportunity with users other than the owner.

 **Note:** To enable access to this object for your org, contact Salesforce customer support. However, we recommend that you instead use Metadata API to programmatically update owner sharing rules because it triggers automatic sharing rule recalculation. The [SharingRules](#) Metadata API type is enabled for all orgs.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description A description of the sharing rule. Maximum size is 1000 characters. This field is available in API version 29.0 and later.
DeveloperName	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object’s name in a managed package and the changes are reflected in a subscriber’s organization. Corresponds to Rule Name in the user interface. This field is available in API version 24.0 and later.

Field	Details
	When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
GroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the source group. Opportunities owned by users in the source group trigger the rule to give access.
Name	Type string Properties Create, Filter, Group, Sort, Update Description Label of the sharing rule as it appears in the user interface. Limited to 80 characters. Corresponds to Label on the user interface.
OpportunityAccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A value that represents the type of sharing being allowed. The possible values are: • Read • Edit
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the target user or group. The target user or group is being given access.

Usage

Use this object to manage the sharing rules for opportunities. General sharing and Territory-related sharing use this object.

SEE ALSO:

[Case](#)

[Metadata API Developer Guide: SharingRules](#)

OpportunityPartner

This object represents a partner relationship between an Account and an Opportunity. An OpportunityPartner record is created automatically when a Partner record is created for a partner relationship between an account and an opportunity.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeObjects()`, `query()`, `retrieve()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
AccountToId	Type reference Properties Create, Filter, Group, Sort Description ID of the partner Account in the partner relationship. This is a relationship field. Relationship Name AccountTo Relationship Type Lookup Refers To Account
IsPrimary	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort

Field	Details
	Description Indicates whether the account is the opportunity's primary partner (<code>true</code>) or not (<code>false</code>). Label is Primary .
OpportunityId	Type reference Properties Create, Filter, Group, Sort Description ID of the Opportunity that is in the partner relationship. This is a relationship field. Relationship Name Opportunity Relationship Type Lookup Refers To Opportunity
ReversePartnerId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the reciprocal OpportunityPartner record in a partner relationship.
Role	Type picklist Properties Create, Filter, Group, Nillable, Sort Description The UserRole that the Account has on the Opportunity. For example, <code>Reseller</code> or <code>Manufacturer</code> .

Creating an Account-Opportunity Partner Relationship

When you create a partner relationship between an account and an opportunity (when you create a Partner record and specify the `OpportunityId` field), the API automatically creates two OpportunityPartner records, one for the forward relationship and one for the reverse.

- The value of the Partner field `AccountToId` maps to the value of the OpportunityPartner field `AccountToId`.
- The values of the `OpportunityId`, `Role`, and `IsPrimary` fields in both the Partner and OpportunityPartner records are the same.

- If you set the `IsPrimary` value to `1 (true)` upon insert of a new `OpportunityPartner`, the `IsPrimary` value is automatically set to `0 (false)` for any existing primary partners for that opportunity.

This mapping allows the API to manage the records and their relationships efficiently.

SEE ALSO:

- [Partner](#)
- [AccountPartner](#)

OpportunityRelatedDeleteLog

Represents an audit log of the deletion of opportunity-related child records, such as opportunity team members, product splits, or opportunity splits. This object is available in API version 59.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Available only when the multicurrency feature is enabled. Contains the ISO code for any currency allowed by the organization. When multicurrency is enabled, and a Pricebook2 is specified on the parent opportunity (that is, the <code>Pricebook2Id</code> field isn't blank on the opportunity record referenced by this object's <code>OpportunityId</code>), then the value must match the currency of the <code>CurrencyIsoCode</code> field on the PricebookEntry records that are associated with this object. Possible values are: • <code>AED</code>—UAE Dirham • <code>CAD</code>—Canadian Dollar • <code>INR</code>—Indian Rupee • <code>USD</code>—U.S. Dollar The default value is <code>USD</code>.
DataType	Type picklist

Field	Details
	Properties Filter, Group, Nillable, Restricted picklist, Sort Description Data type of the field that was deleted. Possible values are: • Double • DynamicEnum • EntityId • StaticEnum • Text
DeleteLog	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
FieldName	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The name of the field that was deleted. Possible values are: • OpportunityLineItemSplit.SplitOwnerId • OpportunityLineItemSplit.SplitPercentage • OpportunityLineItemSplit.SplitTypeId • OpportunitySplit.SplitOwnerId • OpportunitySplit.SplitPercentage • OpportunitySplit.SplitTypeId • OpportunityTeamMember.TeamMemberRole • OpportunityTeamMember.UserId • Product2.Name
OpportunityId	Type reference Properties Filter, Group, Sort Description Required. ID of the associated opportunity.

Field	Details
	This field is a relationship field. Relationship Name Opportunity Relationship Type Lookup Refers To Opportunity
Parent	Type string Properties Filter, Group, Nillable, Sort Description ID of the record that was deleted. Records with the same Parent text indicate that the value shown in the Value field came from the same record that was previously deleted. Refer to the FieldName field to see which field is being tracked.
SubjectType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The object that's being recorded for this row of data. Possible values are: • OpportunityLineItemSplit • OpportunitySplit • OpportunityTeamMember
Value	Type anyType Properties Nillable, Sort Description The value of the field that was deleted.

OpportunityShare

Represents a sharing entry on an Opportunity.

You can only create, edit, and delete sharing entries for standard objects whose `RowCause` field is set to `Manual`. Sharing entries for standard objects with different `RowCause` values are created as a result of your Salesforce org's sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren't stored at all.

 **Note:** While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it's possible that we'll stop storing certain share records to improve performance. As a best practice, don't create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`describeSObjects()`, `create()`, `delete()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, only users with access to the Opportunity object can access this object.

Fields

The properties available for some fields depend on the default organization-wide sharing settings. The properties listed are true for the default settings of such fields.

Field	Details
<code>IsDeleted</code>	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
<code>OpportunityAccessLevel</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Level of access that the user or group has to the opportunity. The possible values are: • <code>Read</code> • <code>Edit</code> • <code>All</code>—This value is not valid when creating, updating, or deleting records. This field must be set to an access level that's higher than the org's default access level for opportunities.
<code>OpportunityId</code>	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description ID of the opportunity associated with this sharing entry. This field can't be updated. This is a relationship field. Relationship Name Opportunity Relationship Type Lookup Refers To Opportunity
RowCause	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is <code>Manual</code>. If no value is specified, the field defaults to <code>Manual</code>. All other <code>RowCause</code> values are read-only. After the sharing entry is created, this field can't be edited. Valid values include: • <code>Owner</code>—The User is the owner of the opportunity. • <code>Manual</code>—The User or Group has access because a user with "All" access manually shared the opportunity with the user or group. • <code>Rule</code>—The User or Group has access via an opportunity sharing rule. • <code>GuestRule</code>—The User or Group has access via an opportunity guest user sharing rule. • <code>ImplicitChild</code>—The User or Group has access to the opportunity on the account associated with this opportunity. After faster account sharing recalculation is enabled, sharing entries with this value aren't returned in queries. Instead of storing implicit child shares, record access is determined dynamically. • <code>Implicit</code>—The User has access to records owned by high-volume Experience Cloud site users via a share group. • <code>ARImplicit</code>—The User, who belongs to a partner or customer account, has access to the opportunity via an account relationship data sharing rule. • <code>Sales Team</code>—The User has access to the opportunity because the user is on the opportunity sales team for the opportunity. The <code>OpportunityTeamMember</code> object sets the access level. See <code>OpportunityTeamMember</code> for more information. • <code>Territory</code>—The forecast manager has access because they are assigned to a territory above the territory that is assigned the opportunity.
UserOrGroupId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort
	Description ID of the user or group that has been given access to the opportunity. This field can't be updated. This is a polymorphic relationship field.
	Relationship Name UserOrGroup
	Relationship Type Lookup
	Refers To Group, User

Usage

This object allows you to determine which users and groups can view or edit opportunities owned by other users.



Note: After faster account sharing recalculation is enabled for your org, we no longer store implicit share records between accounts and their child opportunity records. Sharing entries that have a value of `ImplicitChild` in the `RowCause` field aren't returned when you query this object. Instead, the system dynamically determines whether users can access child opportunity records when they try to access them. This change speeds up ownership and sharing recalculation for accounts.

For more information, see the [Faster Account Sharing Recalculation](#) knowledge article.

If you attempt to create a record that matches an existing record, any modified fields are updated, the system returns the existing record.

If an opportunity is shared in multiple ways with a user, you don't always see multiple sharing records. If a user has access to an opportunity for one or more of the following `RowCause` values, the records in the `OpportunityShare` object are compressed into one record with the highest level of access.

- `Manual`
- `Owner`

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

OpportunitySplit

`OpportunitySplit` credits one or more opportunity team members with a portion of the opportunity amount. This object is available in API version 16.0 and later for pilot customers, and version 28.0 and later for others.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
ArchivedTerritoryName	Type String Properties Filter, Group, Nillable, Sort Description The name of the associated territory that's on an archived territory model. If the OpportunityLineItemSplit isn't associated with a territory on an archived territory model, the field value is null. This field is available in API version 62.0 and later.
HasOpportunityLineItemSplit	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Read-only. Indicates whether the opportunity split has a split on the opportunity line item level (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>. This field is available in API version 58.0 and later.
OpportunityId	Type reference Properties Create, Filter, Group, Sort Description ID of the opportunity for which the split is being created. This field is a relationship field. Relationship Name Opportunity Relationship Type Lookup Refers To Opportunity
Split	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Read-only. Automatically generated number identifying the split within the opportunity.

Field	Details
SplitAmount	Type currency Properties Filter, Nillable, Sort Description Monetary amount of the split. Label is Split Amount.
SplitNote	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Enter any notes or comments about the split. The character limit is 255. Label is Split Note.
SplitOwnerId	Type reference Properties Create, Filter, Group, Sort Description The opportunity owner. This field is a relationship field. Relationship Name SplitOwner Relationship Type Lookup Refers To User
SplitPercentage	Type percent Properties Create, Filter, Sort, Update Description Split percentage that this team member receives. If the split type is validated to a 100% total, this number can range from 0 to 100. If the total isn't validated, this number can range from 0 to 1,000. Label is Split (%).

Field	Details
SplitTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Auto-generated, numeric ID for the split type defined by the OpportunitySplitType object. This field is available in API version 28 and later. If this field is blank, the system automatically specifies the default split type for the opportunity amount, which is validated to 100%. This field is a relationship field. Relationship Name SplitType Relationship Type Lookup Refers To OpportunitySplitType
Territory2Id	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the associated territory. This field is a relationship field, and is available in API version 62.0 and later. Relationship Name Territory2 Relationship Type Lookup Refers To Territory2

Usage

Use the OpportunitySplit object to manage splits for an opportunity.

If you change the opportunity owner using the API, the old owner remains on the opportunity team with either Read-only access, or the level of access specified in your organization-wide defaults.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

OpportunitySplitChangeEvent (API version 48.0)

Change events are available for the object.

OpportunitySplitHistory on page 63 (API version 59.0)

History is available for tracked fields of the object.

OpportunitySplitType

OpportunitySplitType provides unique labels and behavior for each split type. This object is available in API version 28.0 and later. There are two default split types: revenue splits, which must total 100%, and overlay splits, which can total any percentage.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`, `update()`

Fields

Field Name	Details
Description	Type textarea Properties Create, Filter, Group, Sort, Update Description Describes the purpose of the split type, providing context to future developers.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description Required. The unique name of the object in the API. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field Name	Details
	Description Enables or disables the split type.
IsTotalValidated	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description If <code>true</code> , the split must total 100%. If <code>false</code> , the split can total any percentage.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates language of split labels in the user interface.
ManageableState	Type ManageableState enumerated list Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the manageable state of the specified component that is contained in a package: • <code>beta</code> • <code>deleted</code> • <code>deprecated</code> • <code>deprecatedEditable</code> • <code>installed</code> • <code>installedEditable</code> • <code>released</code> • <code>unmanaged</code> This field is available in API version 38.0 and later.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The user-interface label for the split type.

Field Name	Details
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, NamespacePrefix is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, NamespacePrefix is set only for objects that are part of an installed managed package. All other objects have no namespace prefix. This field can't be accessed unless the logged-in user has the Customize Application permission.
SplitEntity	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The containing record type, such as an opportunity. Available in API version 30 and later.
SplitField	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Indicates which currency field of the opportunity object is split. Available in API version 30 and later.
SplitDataStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort, Update

Field Name	Details
	Description Indicates the status of the split type. Available in API version 30 and later.

OpportunityStage

Represents the stage of an Opportunity in the sales pipeline, such as New Lead, Negotiating, Pending, Closed, and so on.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
ApiName	Type string Properties Filter, Group, idLookup, Sort Description Uniquely identifies a picklist value so it can be retrieved without using an id or master label.
DefaultProbability	Type percent Properties Filter, Nillable, Sort, Description The default percentage estimate of the confidence in closing a specific opportunity for this opportunity stage value. Label is Probability (%) .
Description	Type string Properties Filter, Group, Nillable, Sort Description Description of this opportunity stage value. Limit: 255 characters.
ForecastCategory	Type picklist

Field	Details
	Properties Filter, Group, Restricted picklist, Sort Description The default forecast category for this opportunity stage value. The forecast category automatically determines how opportunities are tracked and totaled in a forecast. Possible values are: • BestCase • Closed • Forecast • MostLikely • Omitted • Pipeline
ForecastCategoryName	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Available in API version 12.0 and later. The default forecast category value for this opportunity stage value. Possible values are: • Best Case • Closed • Commit • Most Likely • Omitted • Pipeline
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this opportunity stage value is active (<code>true</code>) or not (<code>false</code>). Inactive opportunity stage values are not available in the picklist and are retained for historical purposes only.
IsClosed	Type boolean

Field	Details
	Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this opportunity stage value represents a closed opportunity (<code>true</code>) or not (<code>false</code>). Multiple opportunity stage values can represent a closed opportunity. Label is Closed.
IsWon	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this opportunity stage value represents a won opportunity (<code>true</code>) or not (<code>false</code>). Multiple opportunity stage values can represent a won opportunity. Label is Won.
MasterLabel	Type string Properties Filter, Group, Nillable, Sort Description Master label for this opportunity stage value. This display value is the internal label that does not get translated. Limit: 255 characters.
SortOrder	Type int Properties Filter, Group, Nillable, Sort Description Number used to sort this value in the opportunity stage picklist. These numbers are not guaranteed to be sequential, as some previous opportunity stage values might have been deleted.

Usage

This object represents a value in the opportunity stage picklist, which provides additional information about the stage of an Opportunity, such as its probability or forecast category. Query this object to retrieve the set of values in the opportunity stage picklist, and then use that information while processing Opportunity records to determine more information about a given opportunity. For example, the application could test whether a given opportunity is won or not based on its `StageName` value and the value of the `IsWon` property in the associated `OpportunityStage` object.

This object is read-only via the API.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

OpportunityTag

Associates a word or short phrase with an Opportunity.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
ItemId	Type reference Properties Create, Filter Description ID of the tagged item.
Name	Type string Properties Create, Filter Description Name of the tag. If this value does not already exist, a new TagDefinition is created and becomes the parent of this Tag object. Otherwise, a TagDefinition with the same name becomes the parent of this Tag object. Parent relationships are created automatically.
TagDefinitionId	Type reference Properties Filter Description ID of the parent TagDefinition object that owns the tag.
Type	Type picklist

Field Name	Details
	Properties Create, Filter, Restricted picklist Description Defines the visibility of a tag. Valid values: • Public—The tag can be viewed and manipulated by all users in an organization. • Personal—The tag can be viewed or manipulated only by a user with a matching <code>OwnerId</code>.

Usage

OpportunityTag stores the relationship between its parent TagDefinition and the Opportunity being tagged. Tag objects act as metadata, allowing users to describe and organize their data.

When a tag is deleted, its parent TagDefinition will also be deleted if the name is not being used; otherwise, the parent remains. Deleting a TagDefinition sends it to the Recycle Bin, along with any associated tag entries.

OpportunityTeamMember

Represents a User on the opportunity team of an Opportunity.

See also UserTeamMember, which represents a User who is on the default Opportunity team of another user.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.  Note: An OpportunityTeamMember that is deleted isn't moved to the Recycle Bin and can't be undeleted, unless the record was cascade-deleted when deleting a related Opportunity. For directly deleted OpportunityTeamMember records,

Field	Details
	don't use the <code>isDeleted</code> field to detect deleted records in SOQL queries. Instead, use <code>getDeleted()</code> .
Name	Type string Properties Filter, Nillable, Sort Description The team member name. This read-only field is available in API version 30.0 and later.
OpportunityAccessLevel	Type picklist Properties Filter, Nillable, Restricted picklist Description Opportunity access level for this team member. Valid values: • Read • Edit • All This field is supported in triggers, but not in workflows or validation rules. It's editable in API version 36.0 and later.
OpportunityId	Type reference Properties Create, Filter Description Required. ID of the Opportunity associated with this opportunity team. This field can't be updated.
PhotoURL	Type URL Properties Filter, Nillable, Sort, Group Description Read only. Retrieves the users Chatter photo URL. This field is available in API version 32.0 and later.
TeamMemberRole	Type picklist

Field	Details
	Properties Create, Filter, Nillable, Update Description Role that the team member has on the opportunity. The org’s admin sets the valid values in the Opportunity Team Roles picklist. Label is Team Role.
Title	Type string Properties Filter, Nillable, Sort, Group Description Read only. Retrieves the user’s title. This field is available in API version 36.0 and later.
UserId	Type reference Properties Create, Filter Description Required. ID of the User who is a member of the opportunity team. This field can’t be updated.

Usage

If you create a record for this object and the `OpportunityId` and `UserId` combination matches an existing record, the system updates any modified fields and returns the existing record.

In the user interface, users can set up an opportunity team for the opportunities they own. The opportunity team includes other users that are working on the opportunity with them. This object is available only in organizations that have enabled team selling.

 **Note:** The behavior for changing ownership of opportunities is different using the user interface when the previous owner is on an opportunity team. For example, when you change the owner of an opportunity using the API, the previous owner’s access becomes Read Only or the access specified in your organization-wide default for opportunities, whichever is greater. However, performing this same action in the user interface allows you to select the access level for the previous owner when the previous owner is on an opportunity team.

Associated Objects

This object has the following associated objects. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

OpportunityTeamMemberHistory on page 63 (API version 59.0)

History is available for tracked fields of the object.

SEE ALSO:

[UserTeamMember](#)

OpptyLineItemSplitType

Represents an opportunity product split type. This object is available in API version 58.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
Description	Type textarea Properties Filter, Group, Sort Description Text description of the opportunity line item split type. Limit: 80 characters.
DeveloperName	Type string Properties Filter, Group, Sort Description The developer (API) name of the opportunity line item split type.
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the opportunity line item split type is active (<code>true</code>) or not (<code>false</code>). The value of this field is inherited from the <code>IsActive</code> field of the parent <code>OpportunitySplitType</code> record.

Field	Details
IsTotalValidated	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the OpportunityLineItemSplit records associated with the OpportunityLineItem must have SplitPercent values that aggregate to 100% (<code>true</code>) or not (<code>false</code>). The value of this field is inherited from the <code>IsTotalValidated</code> field of the parent OpportunitySplitType record.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language of the opportunity line item split type.
MasterLabel	Type string Properties Filter, Group, Sort Description The opportunity line item split type label.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object.
OpportunitySplitTypeId	Type reference Properties Filter, Group, Sort Description The ID of the parent OpportunitySplitType. Every OpptyLineItemSplitType must have a parent OpportunitySplitType. This field is a relationship field. Relationship Name OpportunitySplitType Relationship Type Lookup

Field	Details
	Refers To OpportunitySplitType
SplitDataStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The state of the asynchronous job to delete OpportunityLineItemSplit records when the associated OpportunityLineItemSplitType record is deleted. Possible values are: • <code>DeletionFailed</code>—The job failed the last time it ran. • <code>Ready</code>—The job hasn't run or isn't running. OpportunityLineItemSplit records associated with the OpportunityLineItemSplitType can be interacted with. • <code>ToBeDeleted</code>—The job is running.
SplitEntity	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Name or ID of the entity that contains the field being split. In API version 58.0, this value is always OpportunityLineItem.
SplitField	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Name or ID of the field on OpportunityLineItem that is being split. If it's a standard field, then the value is the API name of the field. If it's a custom field, the value is the custom field definition ID.

Usage

When an OpportunitySplitType has product splits enabled in Setup, then an OpportunityLineItemSplitType record is created. For example, if there is an OpportunitySplitType record with a SplitField of `Amount` and product splits is enabled in Setup, then there is an OpportunityLineItemSplitType record with a SplitField of `TotalPrice` (since the TotalPrice field rolls up to Amount).

Order

Represents an order associated with a contract or an account.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Required. ID of the Account associated with this order. Only updated when the order's <code>StatusCode</code> value is <i>Draft</i>. This field is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
ActivatedById	Type reference Properties Filter, Group, Nillable, Sort, Update Description ID of the user who activated this order. This field is a relationship field. Relationship Name ActivatedBy Relationship Type Lookup Refers To User
ActivatedDate	Type dateTime Properties Filter, Nillable, Sort, Update

Field Name	Details
	Description Date and time when the order was activated.
BillingAddress	Type address Properties Filter, Nillable Description
BillingCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description City for the billing address for this order. The maximum size is 40 characters.
BillingCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Country for the billing address for this order. The maximum size is 80 characters.
BillingCountryCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description ISO country code for the billing address for this order.
BillingEmailAddress	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description Email address for this order's billing address. This field is available with Salesforce Order Management, Revenue Cloud, or B2B Commerce license. This field is available in API v48.0 and later.

Field Name	Details
BillingGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Accuracy level of the geocode of the address.
BillingLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>BillingLongitude</code> to specify the precise geolocation of a billing address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places.
BillingLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>BillingLatitude</code> to specify the precise geolocation of a billing address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places.
BillingPhoneNumber	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description Phone number for this order's billing address. This field is available with Salesforce Order Management, Revenue Cloud, or B2B Commerce license. This field is available in API v48.0 and later.
BillingPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Postal code for the billing address for this order. The maximum size is 20 characters.

Field Name	Details
BillingState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description State for the billing address for this order. The maximum size is 80 characters.
BillingStateCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description ISO state code for the order's billing address.
BillingStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Street address for the billing address.
BillToContactId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the contact that the order is billed to.
CompanyAuthorizedById	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the user who authorized the account associated with the order. This field is a relationship field. Relationship Name CompanyAuthorizedBy Relationship Type Lookup Refers To User

Field Name	Details
CompanyAuthorizedDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date on which your organization authorized the order.
ContractId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the contract associated with this order. Only updated when the order's <i>StatusCode</i> value is <i>Draft</i>. This field is a relationship field. Relationship Name Contract Relationship Type Lookup Refers To Contract
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Three-letter ISO 4217 currency code.
CustomerAuthorizedById	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the contact who authorized the order. This field is a relationship field. Relationship Name CustomerAuthorizedBy Relationship Type Lookup

Field Name	Details
	Refers To Contact
CustomerAuthorizedDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Date on which the contact authorized the order.
Description	Type textarea Properties Create, Nillable, Update Description Description of the order.
EffectiveDate	Type date Properties Create, Filter, Group, Sort, Update Description Date at which the order becomes effective. Label is Order Start Date .
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Date at which the order ends. Label is Order End Date .
ExternalCustomerReference	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The external customer ID from an ecommerce channel or any other external channel. Label is External Customer ID Reference . This field is available in API version 66.0 and later.
GrandTotalAmount	Type currency

Field Name	Details
	Properties Filter, Nillable, Sort Description Sum of <code>TotalAmount</code> and <code>TotalTaxAmount</code>. This field is available with Salesforce Order Management, Revenue Cloud, or B2B Commerce license. This field is available in API v48.0 and later.
<code>IsReductionOrder</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Read only. Determines whether an order is a reduction order. Label is Reduction Order.
<code>LastReferencedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last interacted with this record, directly or indirectly.
<code>LastViewedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (<code>LastReferencedDate</code>), but not viewed it.
<code>Name</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Name for this order.
<code>OpportunityId</code>	Type reference

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description ID for the opportunity that's associated with this order.
OrderedDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time that the order was placed. This field is available with Salesforce Order Management, Revenue Cloud, or B2B Commerce license. This field is available in API v48.0 and later.
OrderManagementReferenceIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The field used by Order Management to store the external reference identifier for B2C Commerce orders. On creation, the B2C Integration sets this value to <i>B2C realm ID + "_" + B2C instance ID + "@" + B2C Commerce catalog/domain ID + "@" + B2C Commerce order number</i>. Otherwise, it isn't set. When you create an OrderSummary, if you don't specify an ExternalReferenceIdentifier value, it's set to this value. If this value is null, then the system generates a value for ExternalReferenceIdentifier. This value isn't required to be unique in an organization, but the OrderSummary ExternalReferenceIdentifier is. This field is available in API version 56.0 and later.
OrderNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Order number assigned to this order (not the unique, system-generated ID assigned during creation). The maximum size is 30 characters.
OrderReferenceNumber	Type string

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Order reference number assigned to this order. The maximum size is 80 characters.
OriginalOrderId	Type reference Properties Create, Defaulted on create, Filter, Group, Nillable, Sort Description Optional. ID of the original order that a reduction order is reducing, if the reduction order is reducing a single order. Label is Original Order. Editable only if <code>isReductionOrder</code> is <code>true</code>. If the reduction order is reducing more than one order, leave blank. This field is a relationship field. Relationship Name OriginalOrder Relationship Type Lookup Refers To Order
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Required. ID of the user or queue that owns this order. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PaymentTermId	Type reference Properties Create, Defaulted on create, Filter, Group, Nillable, Sort

Field Name	Details
	Description The ID of the related payment term. This field is available in API version 55.0 and later. This field is available if Subscription Management is enabled in your org. This field is a relationship field. Relationship Name PaymentTerm Relationship Type Lookup Refers To PaymentTerm
PoDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Date of the purchase order.
PoNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Number identifying the purchase order. The maximum is 80.
Pricebook2Id	Type reference Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Required. ID of the price book associated with this order. This field is a relationship field. Relationship Name Pricebook2 Relationship Type Lookup Refers To Pricebook2
QuoteId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the quote that's associated with this order. If you set <code>QuoteId</code> to null, <code>QuoteLineItemId</code> on all of the order's child order products is set to null.
<code>RecordTypeId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the record type assigned to this order.
<code>RelatedOrderId</code>	Type reference Properties Filter, Group, Nillable, Sort Description The original order that a change order was created from. This field is available with Salesforce Order Management, Revenue Cloud, or B2B Commerce license. This field is available in API v48.0 and later. This field is a relationship field. Relationship Name RelatedOrder Relationship Type Lookup Refers To Order
<code>RelatedOrderType</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Specifies the related order type. Possible values are: - ChangeOrder - SupplementalOrder

Field Name	Details
	TransferOrder
SalesChannelId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Reference to a sales channel entity. This field is available with Salesforce Order Management, Revenue Cloud, or B2B Commerce license. This field is available in API v48.0 and later.
SalesStoreId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the RetailStore or WebStore associated with this Order. This field is a polymorphic relationship field. This field is available with Salesforce Order Management, Revenue Cloud, or B2B Commerce license. This field is available in API v46.0 and later. Relationship Name SalesStore Relationship Type Lookup Refers To WebStore
ShippingAddress	Type address Properties Filter, Nillable Description Shipping address for the order.
ShippingCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description City of the shipping address. The maximum size is 40 characters.
ShippingCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Country of the shipping address. The maximum size is 80 characters.
ShippingCountryCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description ISO country code for the order's shipping address.
ShippingGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Accuracy level of the geocode of the shipping address.
ShippingLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>ShippingLongitude</code> to specify the precise geolocation of a shipping address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places.
ShippingLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>ShippingLatitude</code> to specify the precise geolocation of an address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places.

Field Name	Details
ShippingPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Postal code of the shipping address. The maximum size is 20 characters.
ShippingState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description State of the shipping address. The maximum size is 80 characters.
ShippingStateCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description ISO state code for the order's shipping address.
ShippingStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Street address of the shipping address. Maximum of 255 characters.
ShipToContactId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the contact that the order is shipped to.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update

Field Name	Details
	Description Picklist of values that indicate order status. Each value is associated with one of the status categories defined in <code>StatusCode</code>. For example, the status picklist might contain <i>Draft</i>, <i>Ready for Review</i>, and <i>Ready for Activation</i> values with a <code>StatusCode</code> of <i>Draft</i>.
<code>StatusCode</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort, Update Description The status category for the order. Label is Status Category. Valid values are: • <code>Draft</code> • <code>Activated</code> • <code>Superseded</code>—This value is applicable only to Revenue Cloud Advanced users and is available in API version 64.0 and later. To use supplemental orders, also known as in-flight amendments, create a status that's associated with the <code>Superseded</code> status code. .
<code>TaxLocaleType</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of tax calculation that Salesforce uses for the order's order items. VAT regions use gross tax, which includes tax in all sale amounts. US regions use net tax, which calculates tax separately from the initial sale amount and then adds the sale and tax amounts together in a total. Use <code>TaxLocaleType</code> to determine which types of tax fields to show on your order. If <code>TaxLocaleType</code> is null, the order shows all tax fields. Gross Tax Fields <code>TotalAdjDeliveryAmtWithTax</code> <code>TotalAdjProductAmtWithTax</code> <code>TotalProductAdjDistAmtWithTax</code> <code>TotalDeliveryAdjDistAmtWithTax</code> This field is available with Salesforce Order Management, Revenue Cloud, or B2B Commerce license. This field is available in API v49.0 and later.

Field Name	Details
TotalAdjDeliveryAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Sum of delivery line amounts, delivery line adjustments, and tax. Order products with null Type fields aren't included. This field is a gross tax field. This field is available with Salesforce Order Management, Revenue Cloud, or B2B Commerce license. This field is available in API v49.0 and later.
TotalAdjProductAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Sum of product line amounts, line adjustments, and tax. Order products with null Type fields aren't included. This field is a gross tax field. This field is available with Salesforce Order Management, Revenue Cloud, or B2B Commerce license. This field is available in API v49.0 and later.
TotalAdjustedDeliveryAmount	Type currency Properties Filter, Nillable, Sort Description Sum of delivery line amounts and delivery line adjustments. Order products with null Type fields aren't included. This field is available with Salesforce Order Management, Revenue Cloud, or B2B Commerce license. This field is available in API v48.0 and later.
TotalAdjustedDeliveryTaxAmount	Type currency Properties Filter, Nillable, Sort Description Sum of delivery line tax amounts and delivery line tax adjustments.

Field Name	Details
	This field is available with Salesforce Order Management, Revenue Cloud, or B2B Commerce license. This field is available in API v48.0 and later.
TotalAdjustedProductAmount	Type currency Properties Filter, Nillable, Sort Description Sum of product line amounts and line adjustments. Order products with null Type fields aren't included. This field is available with Salesforce Order Management, Revenue Cloud, or B2B Commerce license. This field is available in API v48.0 and later.
TotalAdjustedProductTaxAmount	Type currency Properties Filter, Nillable, Sort Description Sum of line tax amounts and line tax adjustments. Order products with null Type fields aren't included. This field is available with Salesforce Order Management, Revenue Cloud, or B2B Commerce license. This field is available in API v48.0 and later.
TotalAmount	Type currency Properties Filter, Sort Description The net total amount for the order products associated with this order. This field is available in API v48.0 and later.
TotalDeliveryAdjDistAmount	Type currency Properties Filter, Nillable, Sort Description Roll-up of the order's delivery adjustment distributed amounts. Used only when the Order Adjustment Group has a Type value of Header.

Field Name	Details
	This field is available with Salesforce Order Management, Revenue Cloud, or B2B Commerce license. This field is available in API v48.0 and later.
TotalDeliveryAdjDistAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Roll-up of the order's delivery adjustment distributed amounts and tax. Used only when the Order Adjustment Group has a Type value of Header. This field is a gross tax field. This field is available with Salesforce Order Management, Revenue Cloud, or B2B Commerce license. This field is available in API v49.0 and later.
TotalDeliveryAdjDistTaxAmount	Type currency Properties Filter, Nillable, Sort Description Roll-up of the order's delivery adjustment distributed tax amounts. Used only when the Order Adjustment Group has a Type value of Header. This field is available with Salesforce Order Management, Revenue Cloud, or B2B Commerce license. This field is available in API v48.0 and later.
TotalProductAdjDistAmount	Type currency Properties Filter, Nillable, Sort Description Roll-up of the order's product adjustment distributed amounts. Order products with null Type fields aren't included. Used only when the Order Adjustment Group has a Type value of Header. This field is available with Salesforce Order Management, Revenue Cloud, or B2B Commerce license. This field is available in API v48.0 and later.
TotalProductAdjDistAmtWithTax	Type currency

Field Name	Details
	Properties Filter, Nillable, Sort Description Roll-up of the order's product adjustment distributed amounts. Order products with null Type fields aren't included. Used only when the Order Adjustment Group has a Type value of Header. This field is a gross tax field. This field is available with Salesforce Order Management, Revenue Cloud, or B2B Commerce license. This field is available in API v49.0 and later.
TotalProductAdjDistTaxAmount	Type currency Properties Filter, Nillable, Sort Description Roll-up of the order's product adjustment distributed tax amounts. Order products with null Type fields aren't included. Used only when the Order Adjustment Group has a Type value of Header. This field is available with Salesforce Order Management, Revenue Cloud, or B2B Commerce license. This field is available in API v48.0 and later.
TotalTaxAmount	Type currency Properties Filter, Nillable, Sort Description Roll-up of all taxes on the order, including delivery taxes, price adjustment taxes, and product taxes. This field is available with Salesforce Order Management, Revenue Cloud, or B2B Commerce license. This field is available in API v48.0 and later.
Type	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description To show more information about your order, you can add custom values to the <code>Type</code> picklist. By default, the <code>Type</code> field doesn't perform any actions or show any values.

Usage

The `Status` field specifies the current state of an order. Status strings represent its current state (*Draft* or *Activated*).

When a client application creates an order, the `Status Code` must be *Draft* and the `Status` must be any value that corresponds to a `Status Code` of *Draft*. The application can then activate an order by updating it and setting the value in its `Status` field to an *Activated* state. However, the `Status` field is the only field you can update when activating the order.

After an order is activated, your client application can change the `Status` back to the *Draft* state—but only if the order doesn't have any child reduction order products. Your client application can delete orders when the `Status` is *Draft* but not when its `Status` is *Activated*.

Client applications can use the API to create, update, delete, and query any Attachment associated with an order.

Orders Without Price Books

If your organization manages products and price books in an external platform, you can use Salesforce API to create orders and order items without values for their price book and price book entry fields. This feature is available only for Salesforce orgs with the B2B Commerce, B2B Commerce Starter, B2B Commerce Growth, or B2B Commerce Plus packages. Admins enable orders without price books by going to Salesforce Order Settings and selecting the Optional Price Book setting.

In a standard order, Salesforce prompts the sales rep to select a price book when they add the first order product to the order. The sales rep can then add order products that have price book entries in the selected price book. In an order without a price book, Salesforce hides the order's Add Products button and Edit Products button so that sales reps must manage their products and price books by using their external system.

You can create orders without price books only by creating an order with the Salesforce API and leaving the `Pricebook2Id` field null. Orders without price books follow several different guidelines compared to standard orders.

- Orders without price books don't support reduction orders or change orders.
- Order products without price book entries require list prices.
- Orders without price books support only order items without price book entries. Orders with price books support only order items with price book entries.
-  **Important:** Orders without price books are supported with B2B licenses only. Salesforce Order Management requires price books for orders and price book entries for order products.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

OrderChangeEvent (API version 44.0)

Change events are available for the object.

OrderFeed (API version 29.0)

Feed tracking is available for the object.

OrderHistory

History is available for tracked fields of the object.

OrderOwnerSharingRule

Sharing rules are available for the object.

SEE ALSO:

- [OrderHistory](#)
- [OrderItem](#)
- [OrderSummary](#)
- [SalesChannel](#)

OrderAction

Indicates the type of order, such as a new sale or a cancellation. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

This object is available if Subscription Management is enabled in your org.

Fields

Field	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name given to the order action.
OffsetOrderItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The ID of the previous order item that is being modified by the business action. For example, the order that is being canceled. This is a relationship field. Relationship Name OffsetOrderItem Relationship Type Lookup Refers To OrderItem
OrderId	Type reference Properties Create, Filter, Group, Sort Description The order containing the order item that implements the business action. This is a relationship field. Relationship Name Order Relationship Type Lookup Refers To Order
SourceAssetId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The asset that is changed as a result of the business action. For example, the asset that is being canceled. This is a relationship field. Relationship Name SourceAsset Relationship Type Lookup Refers To Asset

Field	Details
Subtype	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The subtype of the action on the order line item. Valid values are: - FieldAmendment - Rollback - StartDateAdjustment - TransferFrom - TransferTo This field is available with Revenue Cloud in API version 64.0 and later.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The business action that created the order product. Valid values are: - Add - Amend - Cancel - No Change - Renew - Transfer—Available with Revenue Cloud in API version 65.0 and later.

OrderAdjustmentGroup

Group containing a set of adjustments applied to an order. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access Commerce Orders entities, your org must have a Salesforce Order Management license. Commerce Orders entities are available only in Lightning Experience.

Fields

Field	Details
AdjustmentBasisReferenceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description References the specific coupon applied. This is a polymorphic relationship field. Relationship Name AdjustmentBasisReference Relationship Type Lookup Refers To Coupon This field is available in API version 54.0 and later. This field can only refer to Coupon when B2B Commerce is enabled.
AdjustmentCauseId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description References the specific promotions applied. This field is a polymorphic relationship field. Relationship Name AdjustmentCause Relationship Type Lookup Refers To PriceAdjustmentTier, Promotion This field is available in API version 52.0 and later. This field can only refer to Promotion when B2B Commerce is enabled.

Field	Details
AdjustmentSource	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates the origin of the adjustment. Possible values are: • Discretionary—The adjustment originates from a decision made by an individual, for example, a manager’s discount granted to a client. • Promotion—The adjustment originates from a promotion, for example, a holiday sale discount. • Rule—Reserved for future use. • System—The adjustment originates from the system, for example, a volume discount after the amount of items reaches a specific number. This field is available in API version 57.0 and later.
AdjustmentType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates the type of mathematical adjustment to be applied to the order. Possible values are: • AdjustmentAmount—The adjustment is a numerical amount, for example, a cash discount of 20. • AdjustmentPercentage—The adjustment is a percentage amount, for example, a 10% discount. • OverrideAmount—The adjustment is a manual price override. This field is available in API version 57.0 and later.
AdjustmentValue	Type double Properties Create, Filter, Nillable, Sort, Update Description The specified <code>AdjustmentType</code>’s amount to be applied to the order. For example, when the <code>AdjustmentType</code> value is <code>AdjustmentAmount</code>, the <code>AdjustmentValue</code> is expected to equal the value of the <code>TotalAmount</code> field.

Field	Details
	When the <code>AdjustmentType</code> value is <code>AdjustmentPercentage</code>, the <code>AdjustmentValue</code> represents the percentage number, and the <code>TotalAmount</code> field's value will show the calculated adjustment amount. This field is available in API version 57.0 and later.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The currency used for the checkout session. Default value is <code>USD</code>. Possible values are: • <code>USD</code>—U.S. Dollar
Description	Type textarea Properties Create, Nillable, Update Description User-entered information about the order adjustment group.
GrandTotalAmount	Type currency Properties Filter, Nillable, Sort Description The sum of all total amounts of all adjustments in this group, including tax.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The user-defined name of the order adjustment group.
OrderId	Type reference Properties Create, Filter, Group, Sort Description The unique identifier of the order related to the adjustments in this order adjustment group.

Field	Details
	This field is a relationship field. Relationship Name Order Relationship Type Lookup Refers To Order
Priority	Type int Properties Create, Filter, Group, Nillable, Sort Description A numeric value that represents the order of precedence of the order adjustment group. It can also represent the order of precedence when applying the <code>AdjustmentType</code> values. For example, an order can have two adjustments: a \$100 discount and a 10% discount. This field will tell the pricing engine which adjustment needs to be applied first. This field is available in API version 57.0 and later.
RelatedAdjustmentGroupId	Type reference Properties Filter, Group, Nillable, Sort Description The unique identifier of the original order's adjustment group. This field is a useful reference in change order scenarios. This field is a relationship field. Relationship Name RelatedAdjustmentGroup Relationship Type Lookup Refers To OrderAdjustmentGroup
TotalAmount	Type currency Properties Filter, Nillable, Sort Description The total of all order adjustments in this order adjustment group, excluding tax.

Field	Details
TotalTaxAmount	Type currency Properties Filter, Nillable, Sort Description The total tax for all order adjustments in this order adjustment group.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Indicates how the adjustment was applied to the order. Possible values are: • Header: — The adjustment was applied to the order's balance, and then distributed among the order products in the adjustment group. • SplitLine— The adjustment was applied to order product balances for the order products in the adjustment group.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[OrderAdjustmentGroupChangeEvent](#) on page 68

Change events are available for the object.

[OrderAdjustmentGroupFeed](#) on page 55

Feed tracking is available for the object.

[OrderAdjustmentGroupHistory](#) on page 63

History is available for tracked fields of the object.

[OrderAdjustmentGroupOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[OrderAdjustmentGroupShare](#) on page 67

Sharing is available for the object.

OrderAdjustmentGroupSummary

Represents the current properties and state of a group of related price adjustments. Associated with a set of `OrderItemAdjustmentLineSummaries` that apply to `OrderItemSummaries` belonging to one `OrderSummary`. Corresponds to one or more order adjustment group objects, consisting of an original object and any change objects applicable to it. This object is available in API version 48.0 and later.

An OrderAdjustmentGroupSummary can represent an adjustment to an entire order as a group of adjustments to each of its products. For example, representing “10% off the order” as a set of 10% off adjustments to each product on the order. It can also represent an adjustment that applies to a subset of the products on an order. For example, representing “buy one, get one 50% off” as a 25% off adjustment to each of two products.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is only available in Salesforce Order Management orgs or if the B2B Commerce license is enabled.

Fields

Field	Details
AdjustmentBasisReferenceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description References the specific coupon applied. This is a polymorphic relationship field. Relationship Name AdjustmentBasisReference Relationship Type Lookup Refers To Coupon This field is available in API version 54.0 and later.
AdjustmentCauseId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description References the specific promotions applied. This is a polymorphic relationship field. Relationship Name AdjustmentCause

Field	Details
	Relationship Type Lookup Refers To Promotion This field is available in API version 52.0 and later.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description ISO code for the currency of the OrderSummary associated with the adjustments in the group. The default value is USD. Possible values are: • DKK—Danish Krone • EUR—Euro • GBP—British Pound • USD—U.S. Dollar This field is available in API version 49.0 and later.
Description	Type textarea Properties Create, Nillable, Update Description Description of the OrderAdjustmentGroupSummary. This field can be edited.
GrandTotalAmount	Type currency Properties Filter, Nillable, Sort Description Total, including tax, of the associated OrderItemAdjustmentLineSummaries.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update

Field	Details
	Description Name of the OrderAdjustmentGroupSummary.
OrderSummaryId	Type reference Properties Filter, Group, Sort Description ID of the OrderSummary associated with the OrderAdjustmentGroupSummary.
OriginalOrderAdjGroupId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the original OrderAdjustmentGroup associated with this summary object. Nillable=true only if the associated order summary is unmanaged. For managed order summaries, nillable=false.
TotalAmount	Type currency Properties Filter, Nillable, Sort Description Total, not including tax, of the associated OrderItemAdjustmentlineSummaries.
TotalTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalAmount.
Type	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Type of the OrderAdjustmentGroupSummary. Header represents an order-level adjustment with an OrderItemAdjustmentLineSummary for each OrderItemSummary on the OrderSummary. SplitLine represents any other related set of OrderItemAdjustmentLineSummaries.

Field	Details
	Possible values are: • <code>Header</code> • <code>SplitLine</code> If the <code>OrderLifeCycleType</code> field on the associated <code>OrderSummary</code> is set to <code>UNMANAGED</code>, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[OrderAdjustmentGroupSummaryChangeEvent](#) (API version 62.0)

Change events are available for the object.

SEE ALSO:

[OrderAdjustmentGroup](#)

[OrderItemAdjustmentLineSummary](#)

OrderChangeLog

Represents a log record of all change requests made to an order post activation. A log record is always one-to-one to change an order request. This object is available in API version 48.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Commerce Cloud standard objects in the inventory data model require at least one of the following licenses: B2B Commerce, D2C Commerce.

Fields

Field	Details
<code>ChangeLineId</code>	Type reference Properties Filter, Group, Sort

Field	Details
	Description The ID of the main change line created as a result of the change request. For example, if you change an order item, the <code>ChangeLineId</code> would be the change OrderItem ID, or if you change a shipping address, the <code>ChangeLineId</code> would be the change OrderDeliveryGroup ID. This field is a polymorphic relationship field. Relationship Name ChangeLine Relationship Type Lookup Refers To OrderAdjustmentGroup, OrderDeliveryGroup, OrderItem, OrderItemAdjustmentLineItem, OrderItemTaxLineItem
ChangeLineType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The method used to implement the change. Possible values are: • Delta • New
ChangeOrderId	Type reference Properties Filter, Group, Sort Description The ID of the change order. This field is a relationship field. Relationship Name ChangeOrder Relationship Type Lookup Refers To Order
ChangeRequest	Type string

Field	Details
	Properties Filter, Group, idLookup, Sort Description The unique ID of the request of which this change is a part.
ChangeSummary	Type textarea Properties Description A human-readable summary of the change details. Here's an example of a change summary: <pre>Reduced quantity by -3. Change adjustment by \$15. Added an adjustment of \$20. Changed tax by \$-0.11, effective 1/1/2020. Added a tax of \$1.5, effective 1/1/2020.</pre>
ChangeType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of the change request. Possible values are: • NewAdjustmentGroups—Add a new header level adjustment. • NewLineAdjustments—Add a new line level adjustment. • NewOrderItems—Add a new order item. • QuantityChange—Add or remove quantity from an original order item.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The ISO code for any currency allowed by the organization. Possible value is: • USD—U.S. Dollar The default value is USD.

Field	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name for the order change log.
RelatedLineId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the main line that is changed as a result of this change. This field is a polymorphic relationship field. Relationship Name RelatedLine Relationship Type Lookup Refers To OrderAdjustmentGroup, OrderDeliveryGroup, OrderItem, OrderItemAdjustmentLineItem, OrderItemTaxLineItem
RelatedOrderId	Type reference Properties Filter, Group, Sort Description The ID of the order that is changed. This field is a relationship field. Relationship Name RelatedOrder Relationship Type Master-detail Refers To Order (the master object)
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort

Field	Details
	Description The order status of the change order. Possible values are: • Activated • Draft

Usage

Order change log entries are automatically created each time an order is modified.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

OrderChangeLogFeed on page 55

Feed tracking is available for the object.

OrderChangeLogHistory on page 63

History is available for tracked fields of the object.

OrderChgReasonCategMap

The mapping between an order change reason and a service flow category. This object is available in API version 65.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Category	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The service flow that reasons are being categorized by. Possible values are: • Cancel

Field	Details
	- CancelAll - CancelFee - Discount - Exchange - RMA - Return - ReturnFee
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The currency code of the order. Possible values are: - EUR—Euro - GBP—British Pound - USD—U.S. Dollar The default value is <code>USD</code>.
Description	Type textarea Properties Create, Nillable, Update Description The description of the mapping.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Whether the category mapping is active. The default value is <code>false</code>.
IsAvailableForExternalUser	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Whether the mapping can be accessed and used by external users. The default value is <code>false</code> .
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the mapping.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the mapping. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
Reason	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The order change reason that's being categorized.

Field	Details
	Possible values are: • Damaged • DoorLocked • IncorrectPrice • Rejected • WrongItem The default value is Damaged.

OrderDeliveryGroup

A group of order items that share a delivery method and address. The delivery method and address are used during the fulfillment process, such as shipping as a gift, downloading, picking up in store, or shipping to a standard address. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access Commerce Orders entities, your org must have a Salesforce Order Management license. Commerce Orders entities are available only in Lightning Experience.

Fields

Field	Details
<code>DeliverToAddress</code>	Type address Properties Filter, Nillable Description The delivery group's order items are delivered to this address. Created based on the values of the other <code>DeliverTo</code> fields.
<code>DeliverToCity</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description City address value. Sent to <code>DeliverToAddress</code> .
<code>DeliverToCompanyName</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description
<code>DeliverToCountry</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Country address value. Sent to <code>DeliverToAddress</code>
<code>DeliverToFullFirstName</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description
<code>DeliverToFullLastName</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description
<code>DeliverToFullName</code>	Type string Properties Filter, Group, Nillable, Sort Description
<code>DeliverToFullSalutation</code>	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Possible values are:

Field	Details
	• Dr. • Mr. • Mrs. • Ms. • Prof.
DeliverToGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Geocode accuracy address value. Sent to DeliverToAddress.
DeliverToLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Latitude address value. Sent to DeliverToAddress.
DeliverToLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Longitude address value. Sent to DeliverToAddress.
DeliverToName	Type string Properties Create, Filter, Nillable, Group, Sort, Update Description Name of the delivery recipient. Sent to DeliverToAddress.
DeliverToPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Postal Code address value. Sent to DeliverToAddress.

Field	Details
DeliverToState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description State address value. Sent to DeliverToAddress.
DeliverToStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Street address value. Sent to DeliverToAddress.
DeliveryInstructions	Type textarea Properties Create, Nillable, Update Description Text field for users to add other delivery instructions.
Description	Type textarea Properties Create, Nillable, Update Description User-defined description for this delivery group.
DesiredDeliveryDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The buyer's target delivery date for the order items included in the delivery group.
EmailAddress	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description The buyer's email address.

Field	Details
GiftMessage	Type textarea Properties Create, Nillable, Update Description An optional gift message that the buyer can define if they're sending the order items as a gift to another recipient. Applies to all order items in the delivery group.
GrandTotalAmount	Type currency Properties Filter, Nillable, Sort Description The sum of the group's total delivery amount and total tax amount.
IsGift	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description All items in the delivery group are gifts.
OrderDeliveryGroupNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Unique number used for referencing this order delivery group.
OrderDeliveryMethodId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the order delivery method related to this order delivery group.
OrderId	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description ID of the parent order for this order delivery group. An order can have multiple order delivery groups.
PhoneNumber	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description Phone number of the buyer.
PromisedDeliveryDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Merchant-defined date that the items in this group will be delivered to the customer. Usually defined based on an estimated date from the shipping provider.
RelatedDeliveryGroupId	Type reference Properties Filter, Group, Nillable, Sort Description The original delivery group. Used for reference in change order scenarios.
TotalAdjustmentAmount	Type currency Properties Filter, Nillable, Sort Description The sum of all adjustments (of type Delivery Charge) made to order items in the order delivery group.
TotalAdjustmentAmtWithTax	Type currency Properties Filter, Nillable, Sort Description The sum of all adjustments (of type Delivery Charge) made to order items in the order delivery group, including tax. This is a gross tax field.

Field	Details
	To access Commerce Orders fields, your org must have a Salesforce Order Management license. Commerce Orders fields are available only in Lightning Experience. This field is available in API v49.0 and later.
TotalAdjustmentTaxAmount	Type currency Properties Filter, Nillable, Sort Description The sum of all adjustments (of type Delivery Charge) made to tax lines for order items in the order delivery group.
TotalAmount	Type currency Properties Filter, Nillable, Sort Description The sum of all Total Amount fields (of type Delivery Charge) on order items within this delivery group. On an order item, the total amount equals the quantity multiplied by the unit price, including adjustments and tax.
TotalLineAmount	Type currency Properties Filter, Nillable, Sort Description The sum of order items (of the type Delivery Charge). On an order item, the total line amount equals the quantity multiplied by the unit price, before adjustments or tax.
TotalLineAmtWithTax	Type currency Properties Filter, Nillable, Sort Description The sum of all TotalLineAmtWithTax fields (of type Delivery Charge) on order items within this delivery group. On an order item, the total line amount with tax equals the quantity multiplied by the unit price, plus tax, before adjustments. This is a gross tax field. To access Commerce Orders fields, your org must have a Salesforce Order Management license. Commerce Orders fields are available only in Lightning Experience. This field is available in API v49.0 and later.

Field	Details
TotalLineTaxAmount	Type currency Properties Filter, Nillable, Sort Description The sum of all Total Line Tax Amount fields (of type Delivery Charge) on order items within this delivery group. On an order item, the total line tax amount equals the total tax for that line.
TotalTaxAmount	Type currency Properties Filter, Nillable, Sort Description The sum of all Total Tax Amount fields (of type Delivery Charge) on order items within this order delivery group.

OrderDeliveryGroupSummary

Represents the current properties and state of a group of OrderItemSummaries, belonging to one OrderSummary, to be fulfilled using the same delivery method and delivered to the same address. A single shipment can include them all, but that isn't guaranteed. Corresponds to one or more order delivery group objects, consisting of an original object and any change objects applicable to it. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is only available in Salesforce Order Management orgs or if the B2B Commerce license is enabled.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort

Field	Details
	Description ISO code for the currency of the OrderSummary associated with the OrderDeliveryGroupSummary. The default value is USD. Possible values are: • DKK—Danish Krone • EUR—Euro • GBP—British Pound • USD—U.S. Dollar This field is available in API version 49.0 and later.
DeliverToAddress	Type address Properties Filter, Nillable Description Address of the recipient. Users with the Edit Delivery Information user permission can modify this field. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
DeliverToCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Recipient address city.
DeliverToCompanyName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description
DeliverToCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Recipient address country.

Field	Details
DeliverToFullFirstName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description
DeliverToFullLastName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description
DeliverToFullName	Type string Properties Filter, Group, Nillable, Sort Description
DeliverToFullSalutation	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Possible values are: • Dr . • Mr . • Mrs . • Ms . • Prof .
DeliverTo GeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Accuracy of the geocode for the recipient address. Possible values are: • Address • Block • City

Field	Details
	- County - ExtendedZip - NearAddress - Neighborhood - State - Street - Unknown - Zip
DeliverToLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with FulfilledToLongitude to specify the precise geolocation of the recipient address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places.
DeliverToLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with FulfilledToLatitude to specify the precise geolocation of the recipient address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places.
DeliverToName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Name on the recipient address. Users with the Edit Delivery Information user permission can modify this field. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
DeliverToPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description Recipient address postal code.
DeliverToState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Recipient address state.
DeliverToStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Recipient address street.
DeliveryInstructions	Type textarea Properties Create, Nillable, Update Description Special instructions for the delivery. Users with the Edit Delivery Information user permission can modify this field. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
Description	Type textarea Properties Create, Nillable, Update Description Description of the OrderDeliveryGroupSummary. This field can be edited.
DesiredDeliveryDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description Desired date for delivery. This field is informational, available for customizations. Users with the Edit Delivery Information user permission can modify this field. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
EmailAddress	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description Email address of the recipient. Users with the Edit Delivery Information user permission can modify this field. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
GiftMessage	Type textarea Properties Create, Nillable, Update Description Gift message to include. Users with the Edit Delivery Information user permission can modify this field. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
GrandTotalAmount	Type currency Properties Filter, Nillable, Sort Description Total, including adjustments and tax, of the delivery charges associated with the OrderDeliveryGroupSummary. This value only includes OrderItemSummaries of type code Charge.
IsGift	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Indicates whether the OrderDeliveryGroupSummary represents a gift. Users with the Edit Delivery Information user permission can modify this field. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
OrderDeliveryGroupSummaryNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description ID of the OrderDeliveryGroupSummary.
OrderDeliveryMethodId	Type reference Properties Filter, Group, Sort Description ID of the order delivery method specified for the OrderDeliveryGroupSummary. Users with the Edit Delivery Information user permission can modify this field. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
OrderSummaryId	Type reference Properties Filter, Group, Sort Description ID of the OrderSummary associated with the OrderDeliveryGroupSummary.
OriginalOrderDeliveryGroupId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the original order delivery group associated with this summary object. Nillable=true only if the associated order summary is unmanaged. For managed order summaries, nillable=false.

Field	Details
PhoneNumber	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description Phone number of the recipient. Users with the Edit Delivery Information user permission can modify this field. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
PromisedDeliveryDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Promised date for delivery. This field is informational, available for customizations. Users with the Edit Delivery Information user permission can modify this field. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
TotalAdjustmentAmount	Type currency Properties Filter, Nillable, Sort Description Total price adjustments applied to delivery charges associated with the OrderDeliveryGroupSummary. This value only includes adjustments to OrderItemSummaries of type code Charge.
TotalAdjustmentAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Total amount of the price adjustments applied to the delivery charges associated with the OrderDeliveryGroupSummary, inclusive of tax. This amount is equal to TotalAdjustmentAmount + TotalAdjustmentTaxAmount. This field is available in API version 49.0 and later.

Field	Details
TotalAdjustment TaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalAdjustmentAmount.
TotalAmount	Type currency Properties Filter, Nillable, Sort Description Total, including adjustments but not tax, of the delivery charges associated with the OrderDeliveryGroupSummary. This value only includes adjustments to OrderItemSummaries of type code Charge.
TotalLineAmount	Type currency Properties Filter, Nillable, Sort Description Total, not including adjustments or tax, of the delivery charges associated with the OrderDeliveryGroupSummary.
TotalLineAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Total of the delivery charges associated with the OrderDeliveryGroupSummary, inclusive of tax. This amount is equal to TotalLineAmount + TotalLineTaxAmount. This field is available in API version 49.0 and later.
TotalLineTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalLineAmount.
TotalTaxAmount	Type currency

Field	Details
	Properties Filter, Nillable, Sort
	Description Tax on the TotalAmount.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[OrderDeliveryGroupSummaryChangeEvent](#) (API version 62.0)

Change events are available for the object.

SEE ALSO:

[OrderDeliveryGroup](#)

[OrderItemSummary](#)

OrderDeliveryMethod

Shows the customizations and options that a buyer selected for their delivery method. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access Commerce Orders entities, your org must have a Salesforce Order Management license. Commerce Orders entities are available only in Lightning Experience.

Fields

Field	Details
Carrier	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The carrier that the buyer chose for their delivery method. Developers must add values to this field.
ClassOfService	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The carrier class of service that the buyer chose for their delivery method. Developers must add values to this field.
Description	Type textarea Properties Create, Nillable, Update Description Description of the delivery method.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Assign new delivery groups to active delivery methods.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Default name of this record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The user who owns an order delivery method record.
ProductId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Optional. This product represents a delivery charge order product for a delivery using this delivery method. For example, you could create a product that represents an overnight express charge and assign it to an overnight express delivery method.
ReferenceNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Reference number for an external delivery method.
ShippingCarrierMethod	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Optional. A specific shipping service provided by a shipping carrier, such as Ground, 2Day, and NextDay. Depends on the range of transit times available for each carrier.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[OrderDeliveryMethodChangeEvent](#) (API version 62.0)

Change events are available for the object.

OrderHistory

Represents historical information about changes that have been made to the standard fields of the associated order, or to any custom fields with history tracking enabled.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Fields

Field Name	Details
<code>DataType</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Data type of the field that was changed.
<code>Field</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Name of the order field that was modified, or a special value to indicate some other modification to the order.
<code>NewValue</code>	Type anyType Properties Nillable, Sort Description New value of the modified order field. Maximum of 255 characters.

Field Name	Details
OldValue	Type anyType Properties Nillable, Sort Description Previous value of the modified order field. Maximum of 255 characters.
OrderId	Type reference Properties Filter, Group, Sort Description ID of the order associated with this record. This is a relationship field. Relationship Name Order Relationship Type Lookup Refers To Order

Usage

Order history entries are automatically created each time an order is modified.

Two rows are added to this record when foreign key fields change. One row contains the foreign key object names that display in the online application. For example, `Jane Doe` is recorded as the name of a Contact. The other row contains the actual foreign key ID that is only returned to and visible from the API.

This object respects field-level security on the parent object.

SEE ALSO:

[Order](#)

OrderItem

Represents an order product that your organization sells.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

The user must have Edit permission on Order records to create or update order products on an order. The user must have Edit permission on Order records to delete an order product.

Fields

Field Name	Details
AdjustedLineAmount	Type currency Properties Filter, Nillable, Sort Description Line amount following line adjustments, excluding tax. This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v48.0 and later.
AdjustedLineAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Line amount following line adjustments, including tax. This field is a gross tax field. This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v49.0 and later.
AggregatedQuantity	Type double Properties Filter, Nillable, Sort Description The quantity of a order item's grouped transaction lines or the products that have been sold and converted to assets. This field is available in API version 64.0 and later.
AvailableQuantity	Type double Properties Filter, Nillable, Sort

Field Name	Details
	Description The amount of an order product that is available to be reduced. Value must be greater than or equal to 0. An order product is reducible only if <code>AvailableQuantity</code> is greater than 0. Value is always 0 if the order product's parent order is a reduction order.
<code>BatchIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description Identifies a product bundle in a transaction processing batch to ensure that order items from the same bundles are processed together. This field is available in API version 64.0 and later.
<code>BillingFrequency2</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The time period that indicates how often the order item is billed. This field is available in API version 55.0 and later. This field is available with Subscription Management. Possible values are: • Annual • Monthly
<code>CurrencyIsoCode</code>	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for the currency of the original Order associated with the OrderItem. Possible values are: • DKK—Danish Krone • EUR—Euro • GBP—British Pound • USD—U.S. Dollar The default value is USD.

Field Name	Details
	This field is available in API version 49.0 and later.
DeliveryEstimationReference	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Unique reference ID for the delivery estimation.
DeliveryEstimationTimeZone	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Time zone in which the estimated delivery times are based.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Text description of this object. For Commerce stores, during checkout, this field is populated with the value of a product name. The product name is copied from the <code>CartItem.Name</code> field of a cart item that corresponds to the <code>OrderItem</code>.
DoesAutomaticallyRenew	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates that the order item is set to automatically renew (true) or not (false). This field is available in API version 64.0 and later.
EarliestEstimatedDeliveryDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Earliest estimated date for the item to be delivered.
EarliestEstimatedDeliveryTime	Type timeOnly

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Earliest estimated time of the day for the item to be delivered.
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Optional. Last day the order product is available.
EndTimeTime	Type datetime Properties Create, Filter, Group, Nillable, Sort, Update Description The end date and time of the order item, derived from the End Date and End Time fields in the time zone specified in the Start and End Time Zone field. If the time zone isn't specified, the default is Coordinated Universal Time (UTC). Label is End Date Time. This field is available in Revenue Cloud in API version 65.0 and later.
EndTime	Type timeOnly Properties Create, Filter, Group, Nillable, Sort, Update Description The end time of the order item. Label is End Time. This field is available in Revenue Cloud in API version 65.0 and later.
GrossUnitPrice	Type currency Properties Create, Filter, Nillable, Sort, Update Description Unit price including tax. This field is a VAT field that includes tax. Salesforce populates it on order creation only when <code>Order.TaxLocaleType</code> has a value of Gross.

Field Name	Details
IsOrderItemLocked	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether the order item and its children are locked (true) or not (false). Locked order items and their children cannot be modified, added, or deleted. This field is available in API version 63.0 and later.
LastEstimatedDeliveryDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Latest estimated date for the item to be delivered.
LastEstimatedDeliveryTime	Type timeOnly Properties Create, Filter, Group, Nillable, Sort, Update Description Latest estimated time of the day for the item to be delivered.
LineNumber	Type int Properties Create, Filter, Group, Nillable, Sort Description The number used to organize lines on the order. This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v48.0 and later.
ListPrice	Type currency Properties Create, Filter, Nillable, Sort Description List price for the order product. Inherited value from the associated <code>PriceBookEntry</code> upon order product creation.

Field Name	Details
ListPriceTotal	Type currency Properties Create, Filter, Nillable, Sort, Update Description The ListPrice times the Quantity. This field is a calculated field. This field is available in API version 55.0 and later. This field is available with Subscription Management.
NetUnitPrice	Type currency Properties Create, Filter, Nillable, Sort, Update Description The unit price after all price adjustments are applied. This field is available in API version 55.0 and later. This field is available with Subscription Management.
OrderActionId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the related order action. The order action indicates the type of order; for example, a new sale or a cancellation. This field is available in API version 55.0 and later. This field is available with Subscription Management. This field is a relationship field. Relationship Name OrderAction Relationship Type Lookup Refers To OrderAction
OrderDeliveryGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The delivery group for the order product.

Field Name	Details
	This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v48.0 and later. This field is a relationship field. Relationship Name OrderDeliveryGroup Relationship Type Lookup Refers To OrderDeliveryGroup
OrderId	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the order that this order product is a child of. This field is a relationship field. Relationship Name Order Relationship Type Lookup Refers To Order
OrderItemNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Automatically generated number that identifies the order product.
OriginalOrderItemId	Type reference Properties Create, Filter, Group, Nillable, Sort Description Required if <code>isReductionOrder</code> on the parent order is <code>true</code>. ID of the original order product being reduced. This field is a relationship field.

Field Name	Details
	Relationship Name OriginalOrderItem Relationship Type Lookup Refers To OrderItem
PeriodBoundary	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The period boundary helps determine the start and end date of the billing periods. This field is available in API version 55.0 and later. This field is available with Subscription Management and Revenue Cloud. Possible values are: • AlignToCalendar—the period starts on the first day of the term unit; for example, the first day of the month. • Anniversary—The start date determines the boundary. For example, if a monthly subscription starts on September 13, the subscription starts on the 13th day of each month. • DayOfPeriod—the period starts on the day indicated by PeriodBoundaryDay. • LastDayOfPeriod—the period starts on the last day of the pricing term unit; for example, the last day of the month. Keep these considerations in mind for amendment, renewal, and cancellations of assets in Revenue Cloud. • The value of the PeriodBoundary field is copied from the AssetActionSource (initial sale), by default. • For termed selling models where the PeriodBoundary value is Anniversary, the value of the PeriodBoundary field is automatically converted to DayOfPeriod. • Start date adjustment operation on an asset preserves the original value without conversion.
PeriodBoundaryDay	Type int Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description Required when <code>PeriodBoundary</code> is <code>DayOfPeriod</code>. Indicates the day of the week or month that marks the period boundary. Must be an integer from 1 through 31. This field is available in API version 55.0 and later. This field is available with Subscription Management and Revenue Cloud. Keep these considerations in mind for amendment, renewal, and cancellations of assets in Revenue Cloud. • The value of the <code>PeriodBoundary</code> field is copied from the <code>AssetActionSource</code> (initial sale), by default. • When <code>PeriodBoundary</code> field value is converted from <code>Anniversary</code> to <code>DayOfPeriod</code> for termed selling models, the value of the <code>PeriodBoundaryDay</code> field is automatically populated with the day value from <code>AssetActionSource.StartDate</code>. • Start date adjustment operation on an asset preserves the original value without conversion.
<code>PeriodBoundaryStartMonth</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Nillable, Sort, Update Description The field is populated based on input in the <code>StartDate</code>, <code>PeriodBoundary</code>, and <code>PeriodBoundaryDay</code> when <code>BillingFrequency2</code> is <code>Annual</code> or by manual user entry. Possible values are: • 1-January • 2-February • 3-March • 4-April • 5-May • 6-June • 7-July • 8-August • 9-September • 10-October • 11-November • 12-December Keep these considerations in mind for amendment, renewal, and cancellations of assets in Revenue Cloud. • The value of the <code>PeriodBoundary</code> field is copied from the <code>AssetActionSource</code> (initial sale), by default.

Field Name	Details
	- For termed selling models where <code>PeriodBoundary</code> field value is <code>Anniversary</code> and <code>PricingTermUnit</code> field value is <code>ANNUAL</code>, <code>SEMI_ANNUAL</code>, or <code>QUARTERLY</code>, the value of the <code>PeriodBoundaryStartMonth</code> field is automatically recalculated by using <code>AssetActionSource.StartDate.month</code>. - Start date adjustment operation on an asset preserves the original value without conversion.
PricebookEntryId	Type reference Properties Create, Filter, Group, Nillable, Sort Description Required. ID of the associated PricebookEntry. Specify this field when creating OrderItem records. It can't be changed in an update. If you have a B2B Commerce, B2B Commerce Starter, B2B Commerce Growth, or B2B Commerce Plus license, Salesforce users can create orders without price books and order items without price book entries. This field is a relationship field. Relationship Name PricebookEntry Relationship Type Lookup Refers To PricebookEntry
PriceRevisionPolicyId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The price uplift policy associated with this order item. This field is a relationship field. Relationship Name PriceRevisionPolicy Refers To PriceRevisionPolicy Label is Price Revision Policy. This field is available in Revenue Cloud in API version 65.0 and later.

Field Name	Details
PricingTermCount	Type double Properties Create, Filter, Nillable, Sort, Update Description A calculated field indicating the number of pricing terms in the subscription. This field is available in API version 55.0 and later. This field is available with Subscription Management.
PricingTransactionType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the type of pricing transaction. For example, a new sale, a cancellation, an amendment, or a renewal. Possible values: • AmendmentAtLastNegotiatedPrice—Calculate the price of the amended order item by using the same price book and price adjustments as the new sale item. For example, an order item that is amended by using a pricing transaction type of AmendmentAtLastNegotiatedPrice is priced by using the same price book information and price adjustments as the new sale item. The amended order item has the same price as the new sale order item. • AmendmentStartingFromListPrice—Calculate the price of the amended order item by using current price book information, disregarding any pricing information or adjustments that were applied to the new sale item. Typically, an amended order item has a different price than the new sale transaction item. • Cancellation—Calculate the price of the canceled transaction. For example, a 1-year subscription purchased on January 1, is canceled on July 31. The price of the canceled products and services from August 1 through Dec 31 is calculated. • NewSale—The price of a new transaction is calculated. • RenewalAtLastNegotiatedPrice—Calculate the price of the order item by using the same price book and price adjustments as the new sale item. For example, an order item that is renewed by using a pricing transaction type of RenewalAtLastNegotiatedPrice is priced by using the same price book information and price adjustments as the new sale item. The renewal order item has the same price as the new sale order item. • RenewalAtListPrice—Calculate the price of the order item by using current price book information, disregarding any pricing information or

Field Name	Details
	adjustments that were applied to the new sale item. Typically, a renewal order item has a different price than the new sale order item. This field is available in API version 55.0 and later. This field is available with Subscription Management.
ProFormaBillingPeriodAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description The initial amount for the billing period. The final amount for the billing period can include subsequent amendments, discounts, or charges. This field is available in API version 55.0 and later. This field is available with Subscription Management.
Product2Id	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the Product2 associated with this OrderItem. This field is a relationship field. Relationship Name Product2 Relationship Type Lookup Refers To Product2
ProductSellingModelId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the related product selling model. The product selling model defines one method by which a product is sold; for example, as a one-time sale, an evergreen subscription, or a termed subscription. This field is available in API version 55.0 and later. This field is available with Subscription Management. This field is a relationship field.

Field Name	Details
	Relationship Name ProductSellingModel Relationship Type Lookup Refers To ProductSellingModel
ProrationPolicyId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the related proration policy. The proration policy defines how the price is calculated for each subscription period. For example, whether partial periods are allowed, and how the remainder amounts are handled. This field is available in API version 55.0 and later. This field is available with Subscription Management. This field is a relationship field. Relationship Name ProrationPolicy Relationship Type Lookup Refers To ProrationPolicy
Quantity	Type double Properties Create, Filter, Sort, Update Description Required. Number of units of this order product.
QuoteLineItemId	Type reference Properties Create, Filter, Group, Sort, Update Description Required. ID of the associated quote line item. If this field is specified, the quote line item's Quoteld must match the Quoteld for the order product's parent order.

Field Name	Details
ReferencePrice	Type currency Properties Create, Filter, Nillable, Sort Description The original or reference price of the order product. This field is available in API version 63.0 and later.
RelatedChangeIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort Description The identifier used to group all related order items in the same change order. This field is available in API version 63.0 and later.
RelatedOrderItemID	Type reference Properties Create, Filter, Sort, Group Description Required for change orders, shows the original order product. This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v48.0 and later.
RoundedLineAmount	Type currency Properties Filter, Sort Description The rounded line amount, before tax and adjustments. Currency with decimal values of 0.5 and higher round to the next-highest whole unit of currency. The formula to calculate the rounded line amount is: IF(TotalLineAmount != NULL, TotalLineAmount, Quantity * UnitPrice) This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v48.0 and later.
RoundedLineAmtWithTax	Type currency

Field Name	Details
	Properties Filter, Nillable, Sort Description The rounded line amount, including tax. Currency with decimal values of 0.5 and higher round to the next-highest whole unit of currency. This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v49.0 and later.
ServiceDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Start date for the order product. Label is Start Date.
ServiceDateTime	Type datetime Properties Create, Filter, Group, Nillable, Sort, Update Description The service date and time of the order item, which is derived from the Service Date and Service Time fields in the time zone specified in the Service and End Time Zone field. If the time zone isn't specified, the default is Coordinated Universal Time (UTC). Label is Service Time. This field is available in Revenue Cloud in API version 65.0 and later.
ServiceEndTimeZone	Type timeOnly Properties Create, Filter, Group, Nillable, Sort, Update Description Specifies the time zone for the order item's service and end dates, times, and datetimes. Label is Service and End Time Zone. This field is available in Revenue Cloud in API version 65.0 and later.
ServiceTime	Type timeOnly

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The service time of the order item. Label is Service Time. This field is available in Revenue Cloud in API version 65.0 and later.
StartingPriceTotal	Type currency Properties Create, Filter, Nillable, Sort, Update Description The starting unit price times the quantity. This field is available in API version 55.0 and later. This field is available with Subscription Management.
StartingUnitPriceSource	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates whether the starting unit price was entered manually or calculated. This field is available in API version 55.0 and later. This field is available with Subscription Management. Possible values are: • Manual • System
SupplementalChangeType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the order item change type in the supplemental order. Possible values are: • Add • Amend • Cancel • No Change This field is available in API version 64.0 and later.

Field Name	Details
TaxTreatmentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the related tax treatment. This field is available in API version 55.0 and later. This field is available with Subscription Management. This field is a relationship field. Relationship Name TaxTreatment Relationship Type Lookup Refers To TaxTreatment
TotalAdjustedLineTaxAmount	Type currency Properties Filter, Sort Description Sum of line tax amount and line adjustment tax amounts. This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v48.0 and later.
TotalAdjustmentAmount	Type currency Properties Filter, Sort Description Roll up of the order product's price adjustments. This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v48.0 and later.
TotalAdjustmentAmtWithTax	Type currency Properties Filter, Sort Description Roll up of the order product's price adjustments, including tax.

Field Name	Details
	This field is a gross tax field. This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v49.0 and later.
TotalAdjustmentDistAmount	Type currency Properties Filter, Sort Description Roll up of all adjustments on the order. Used only if the OrderAdjustmentGroup has a Type value of Header. This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v48.0 and later.
TotalAdjustmentDistTaxAmount	Type currency Properties Filter, Sort Description Roll up of all adjustment tax amounts on the order. Used only if the OrderAdjustmentGroup has a Type value of Header. This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v48.0 and later.
TotalAdjustmentDistAmtWithTax	Type currency Properties Filter, Sort Description Roll up of all adjustment tax amounts on the order, including tax. Used only if the OrderAdjustmentGroup has a Type value of Header. This field is a gross tax field. This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v49.0 and later.
TotalAdjustmentTaxAmount	Type currency Properties Filter, Sort

Field Name	Details
	Description Sum of the order product's tax adjustments. This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v48.0 and later.
TotalAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Equals <code>TotalPrice + TotalTaxAmount</code> for the order item. This field is a gross tax field. This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v49.0 and later.
TotalLineAdjustmentAmount	Type currency Properties Filter, Sort Description The sum of line-level adjustments for the order product. This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v48.0 and later.
TotalLineAdjustmentAmtWithTax	Type currency Properties Filter, Sort Description The sum of line-level adjustments for the order product, including tax. This field is a gross tax field. This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v49.0 and later.
TotalLineAdjustmentTaxAmount	Type currency Properties Filter, Sort Description Total tax amount for adjustments made to the order product.

Field Name	Details
	This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v48.0 and later.
TotalLineAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description The line amount of the order product, before price adjustments, inclusive of quantity, and pricing term count for subscription. The decimal places for this value must match the decimal places for the currency being used. For example, if the currency is the US dollar, the decimal place for TotalLineAmount must be 2. If the currency is the Japanese yen, the decimal place for TotalLineAmount must be 0. This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v48.0 and later.
TotalLineTaxAmount	Type currency Properties Filter, Sort Description Total tax amount for this order product, excluding tax on adjustments. This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v48.0 and later.
TotalPrice	Type currency Properties Filter, Nillable, Sort Description Total price for this order product. The calculations for this field's value are different if Commerce Orders are enabled. Default Value $TotalPrice = (UnitPrice * Quantity)$ Commerce or Revenue Cloud Orders If TotalLineAmount is null, then $TotalPrice = (ROUND (UnitPrice * Quantity) + TotalAdjustmentAmount)$. The $ROUND (UnitPrice * Quantity)$ is stored in the RoundedLineAmount field. Otherwise, $TotalPrice = ROUND (TotalLineAmount) + TotalAdjustmentAmount$. The $ROUND (TotalLineAmount)$ is also stored in the RoundedLineAmount field.

Field Name	Details
	This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v48.0 and later.
TotalTaxAmount	Type currency Properties Filter, Sort Description Sum of the order product's tax and any adjustments. This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v48.0 and later.
Type	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Describes what the order item represents. Each value is associated with one type code, shown here in parentheses. Possible values are: • <code>Delivery Charge (Charge)</code> — A charge, such as a delivery fee. • <code>Fee (Charge)</code> — A charge, such as a return fee. This value is available in API v56.0 and later. • <code>Order Product (Product)</code> — An item that can be ordered. This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v48.0 and later.
TypeCode	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The category associated with the type. A type code can be associated with one or more types. Possible values are: • <code>Charge</code> • <code>Product</code> This field is available with Salesforce Order Management or Revenue Cloud. This field is available in API v48.0 and later.

Field Name	Details
UnitPrice	Type currency Properties Create, Filter, Nillable, Sort, Update Description Unit price for the order product.

Usage

An order can have associated order product records only if the order has a price book associated with it. An order product must correspond to a product that is listed in the order's price book.

Orders with associated OrderItem records are affected. When OrderItem records are directly deleted, they aren't sent to the recycle bin and can't be undeleted. The `getDeleted()` call shows deleted OrderItem records until they're purged, which is usually within the same day or the next day.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

OrderItemChangeEvent (API version 44.0)

Change events are available for the object.

OrderItemFeed (API version 29.0)

Feed tracking is available for the object.

OrderItemHistory

History is available for tracked fields of the object.

SEE ALSO:

[Order](#)

[OrderItemSummary](#)

OrderItemAdjustmentLineItem

An adjustment that has been made to an order item. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access Commerce Orders entities, your org must have a Salesforce Order Management license. Commerce Orders entities are available only in Lightning Experience.

Fields

Field	Details
AdjustmentAmountScope	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Used with <code>AdjustmentValue</code> to determine the amount of the adjustment. Possible values are: • <code>Total</code>—The adjustment scope is the total price. • <code>Unit</code>—The adjustment scope is the unit price. • <code>UnproratedTotal</code>—The adjustment scope is the unprorated total price.
AdjustmentBasisReferenceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description References the specific coupon applied. This is a polymorphic relationship field. Relationship Name AdjustmentBasisReference Relationship Type Lookup Refers To Coupon This field is available in API version 54.0 and later.
AdjustmentCauseId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description References the specific promotions applied. This is a polymorphic relationship field.

Field	Details
	Relationship Name AdjustmentCause Relationship Type Lookup Refers To Promotion This field is available in API version 52.0 and later.
AdjustmentSource	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates the origin of the adjustment. Possible values are: • Discretionary—The adjustment originates from a decision made by an individual, for example, a manager's discount granted to a client. • Promotion—The adjustment originates from a promotion, for example, a holiday sale discount. • Rule—Reserved for future use. • System—The adjustment originates from the system, for example, a volume discount after the amount of items reaches a specific number. This field is available in API version 57.0 and later.
AdjustmentType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates the type of mathematical adjustment to be applied to the order. Possible values are: • AdjustmentAmount—The adjustment is a numerical amount, for example, a cash discount of 20. • AdjustmentPercentage—The adjustment is a percentage amount, for example, a 10% discount. • OverrideAmount—The adjustment is a manual price override. This field is available in API version 57.0 and later.
AdjustmentValue	Type double

Field	Details
	Properties Create, Filter, Nillable, Sort, Update Description The specified <code>AdjustmentType</code>'s amount to be applied to the order item. For example, when the <code>AdjustmentType</code> value is <code>AdjustmentAmount</code>, the <code>AdjustmentValue</code> is expected to equal the value of the <code>Amount</code> field. When the <code>AdjustmentType</code> value is <code>AdjustmentPercentage</code>, the <code>AdjustmentValue</code> represents the percentage number, and the <code>Amount</code> field's value will show the calculated adjustment amount. This field is available in API version 57.0 and later.
Amount	Type currency Properties Create, Filter, Nillable, Sort, Update Description The net total value of the adjustment line. The value is rounded to the nearest possible amount associated with the currency of the order item.
AppliedPromotionDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time on which the promotion was applied to the asset.
CouponCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the coupon code that was applied.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization. Default value is <code>USD</code>. Possible values are:

Field	Details
	USD—U.S. Dollar
Description	Type textarea Properties Create, Nillable, Update Description Users can add a custom description to the record to provide additional detail.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the adjustment line.
OrderAdjustmentGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The order adjustment group that contains the order item adjustment line item.
OrderId	Type reference Properties Filter, Group, Nillable, Sort Description The parent order of the order item related to the adjustment line.
OrderItemId	Type reference Properties Create, Filter, Group, Sort Description The order item that the adjustment line applies to.
Priority	Type int Properties Create, Filter, Group, Nillable, Sort

Field	Details
	Description A numeric value that represents the order of precedence of the order adjustment group. It can also represent the order of precedence when applying the <code>AdjustmentType</code> values. For example, an order can have two adjustments: a \$100 discount and a 10% discount. This field will tell the pricing engine which adjustment needs to be applied first. This field is available in API version 57.0 and later.
RelatedAdjustmentLineItemId	Type reference Properties Filter, Group, Nillable, Sort Description The original order item adjustment line. Useful for reference in change order scenarios.
TotalAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Equals the order item's price plus <code>TotalTaxAmount</code> for the order item adjustment line item. This is a gross tax field. To access Commerce Orders fields, your org must have a Salesforce Order Management license. Commerce Orders fields are available only in Lightning Experience. This field is available in API v49.0 and later.
TotalTaxAmount	Type currency Properties Filter, Nillable, Sort Description The total amount of tax applied to the adjustment line.

OrderItemAdjustmentLineSummary

Represents the current properties and state of price adjustments on an `OrderItemSummary`. Corresponds to one or more order item adjustment line item objects, consisting of an original object and any change objects applicable to it. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is only available in Salesforce Order Management orgs or if the B2B Commerce license is enabled.

Fields

Field	Details
AdjustmentBasisReferenceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description References the specific coupon applied. This is a polymorphic relationship field. Relationship Name AdjustmentBasisReference Relationship Type Lookup Refers To Coupon This field is available in API version 54.0 and later.
AdjustmentCauseId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description References the specific promotions applied. This is a polymorphic relationship field. Relationship Name AdjustmentCause Relationship Type Lookup Refers To Promotion This field is available in API version 52.0 and later.

Field	Details
Amount	Type currency Properties Filter, Sort Description Amount, not including tax, of the OrderItemAdjustmentLineSummary. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description ISO code for the currency of the OrderItemSummary to which the adjustment applies. The default value is USD. Possible values are: • DKK—Danish Krone • EUR—Euro • GBP—British Pound • USD—U.S. Dollar This field is available in API version 49.0 and later.
Description	Type textarea Properties Create, Nillable, Update Description Description of the OrderItemAdjustmentLineSummary. This field can be edited.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the OrderItemAdjustmentLineSummary.
OrderAdjustmentGroup SummaryId	Type reference

Field	Details
	Properties Filter, Group, Nillable, Sort Description If this object belongs to an OrderAdjustmentGroupSummary, this value is the ID of that OrderAdjustmentGroupSummary.
OrderItemSummaryId	Type reference Properties Filter, Group, Sort Description ID of the OrderItemSummary to which the OrderItemAdjustmentLineSummary applies.
OrderSummaryId	Type reference Properties Filter, Group, Sort Description ID of the OrderSummary associated with the OrderItemSummary to which this OrderItemAdjustmentLineSummary applies.
OriginalOrderItemAdjustmentLineItemId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the original OrderItemAdjustmentLine associated with this summary object. Nillable=true only if the associated order summary is unmanaged. For managed order summaries, nillable=false.
Priority	Type integer Properties Create, Nillable Description Numerical rank used to apply promotions in the correct order. This field is available in API version 52.0 and later.
TotalAmtWithTax	Type currency Properties Filter, Nillable, Sort

Field	Details
	Description Total amount of the adjustment, inclusive of tax. This amount is equal to Amount + TotalTaxAmount. This field is available in API version 49.0 and later.
TotalTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the Amount.

SEE ALSO:

- [OrderItemAdjustmentLineItem](#)
- [OrderItemSummary](#)
- [OrderItemTaxLineItemSummary](#)

OrderItemGroup

Stores the group information for line items in an order. It also stores the aggregated line field information (subtotal). It contains a parent-child relationship to order. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Fields

Field	Details
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the group.

Field	Details
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Reserved for future use.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the group.
OrderId	Type reference Properties Create, Filter, Group, Sort Description ID of the order that this order product is a child of. This field is a relationship field. Relationship Name Order Relationship Type Master-detail Refers To Order (the master object)
SortOrder	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Number indicating the sort order selected by the user.
StartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Reserved for future use.

Field	Details
SummarySubtotal	Type currency Properties Create, Filter, Nillable, Sort, Update Description The total amount of all the line items in the group.
Type	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of the group. Possible values are: CPQOrderGroup—CPQ Line Grouping The default value is CPQOrderGroup.

OrderItemRecipient

Represents a site, employee, or other entity for which services are being ordered. This includes essential details such as the recipient's name, contact information, and the specific site or location where the services will be provided. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
BroadbandConnectionType	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the broadband connection that's available at the address.

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MaxDownloadSpeed	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The maximum download speed available at the address.
MaxUploadSpeed	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The maximum upload speed available at the address.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the customer's site or location.
OrderId	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description The order associated with the recipient. This field is a relationship field. Relationship Name Order Relationship Type Master-detail Refers To Order (the master object)
RecipientType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the type of recipient of the order. Possible values are: • Location • Subscriber The default value is Location.
ServiceAddrValidationDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time when the address was validated.
Service Account	Type entityid Properties Create, Filter, Group, Nillable, Sort, Update Description Reference to the Account Entity where the product is used, serviced, or installed.
ServiceAddrValidationMsg	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The message sent after the validation of the address.
ServiceAddrValidationResult	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the status of the address validation. Possible values are: - Fail - Partial Success - Success The default value is Success.
ServiceAddress	Type address Properties Filter Description The address where the recipient receives the order.
ServiceCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The city where the recipient receives the order.
ServiceCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The country where the recipient receives the order.
ServiceGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description Specifies the accuracy level of the geocoded address coordinates. Possible values are: • Address • Block • City • County • ExtendedZip—Extended Zip • NearAddress—Near Address • Neighborhood • State • Street • Unknown • Zip
ServiceLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description The latitude of the location where the recipient receives the order.
ServiceLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description The longitude of the location where the recipient receives the order.
ServicePostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The postal code of the address.
ServiceState	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The state where the recipient receives the order.
ServiceStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The street where the recipient receives the order
ServiceabilityCheckDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time when the serviceability check was done.
ServiceabilityData	Type textarea Properties Create, Nillable, Update Description The information about serviceability, such as broadband connection, download, and upload speeds available at the address.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[OrderItemRecipientChangeEvent](#)

Change events are available for the object.

[OrderItemRecipientFeed](#)

Feed tracking is available for the object.

[OrderItemRecipientHistory](#)

History is available for tracked fields of the object.

[OrderItemRecipientOwnerSharingRule](#)

Sharing rules are available for the object.

[OrderItemRecipientShare](#)

Sharing is available for the object.

OrderItemRelationship

Describes a relationship between order products. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

This object is available when Subscription Management or Revenue Cloud is enabled.

Fields

Field	Details
AssociatedOrderItemId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The unique identifier of the associated order product. This field is a relationship field. In a bundle relationship, this order product is the bundle component. Relationship Name AssociatedOrderItem Relationship Type Lookup Refers To OrderItem
AssociatedOrderItemInventory	Type picklist Properties Create, Filter, Group, Nillable, Sort Description A static enum that describes the associated order item inventory in the OrderItemSummaryRelationship. Possible values are: IncludedInMainInventory—The child product’s inventory is included in the main inventory.

Field	Details
	NotIncludedInMainInventory—The child product’s inventory isn’t included in the main inventory. Relationship Name AssociatedOrderItemInventory
AssociatedOrderItemPricing	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates how the associated order product is priced relative to the main order product. The value is informative; the system doesn’t check whether the associated order product is included in the bundle price. Possible values are: - IncludedInBundlePrice—The associated order product’s cost is \$0 because it’s included in the bundle’s price. - NotIncludedInBundlePrice—The associated order product has a cost because it’s not included in the bundle’s price.
AssociatedOrderItemRole	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Describes the position of the associated order product in the relationship. Possible values are: - BundleComponent—The associated order product is part of a bundle. - SetComponent—The associated order product is part of a set.
AssociatedQuantScaleMethod	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description How the quantity of the associated order product scales, relative to the main order product. The value is informative; the system doesn’t check whether the scaled quantities are correct. Possible values are: Constant— The associated order’s product quantity remains the same in relation to the main order product’s quantity. For example, the main order product has a quantity of one and the associated order product has a quantity of one.

Field	Details
	Proportional— The associated order's product quantity increases or decreases based on the main order product's quantity. For example, the main order product has a quantity of one and the associated order product has a quantity of two. In other words, there are two associated order products for every one main order product. The default value is <code>Proportional</code>.
IsPriceInclusive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether child products are included in the root bundle price. If set to <code>true</code>, the price of each child product is zero. The default value is <code>false</code>.
MainOrderItemId	Type reference Properties Create, Filter, Group, Sort Description The main order product's unique identifier. This field is a relationship field. In a bundle relationship, this order product is the bundle parent. Relationship Name MainOrderItem Relationship Type Lookup Refers To OrderItem
MainOrderItemRole	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the role of the main order product in the relationship. Possible values are: Bundle— The main order product is the bundle parent. Set— The main order product is the set parent. Subscription Management doesn't support the <code>Set</code> value.

Field	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the order product relationship.
OrderId	Type reference Properties Filter, Group, Nillable, Sort Description The unique identifier of the related order. This field is a relationship field. Relationship Name Order Relationship Type Lookup Refers To Order
ProductRelationshipTypeId	Type reference Properties Create, Filter, Group, Sort Description The unique identifier of the record that describes the relationship between the main and associated order products. This field is a relationship field. Relationship Name ProductRelationshipType Relationship Type Lookup Refers To ProductRelationshipType
RootOrderItemId	Type reference Properties Create, Filter, Group, Nillable, Sort

Field	Details
	Description The root order item for the order item relationship. In a bundle relationship, the root order item is the root bundle. This field is a relationship field.
	Relationship Name RootOrderItem
	Refers To OrderItem

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

OrderItemRelationshipFeed

Feed tracking is available for the object.

OrderItemRelationshipHistory

History is available for tracked fields of the object.

OrderItemSummary

Represents the current properties and state of a product or charge on an OrderSummary. Corresponds to one or more order item objects, consisting of an original object and any change objects applicable to it. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is only available in Salesforce Order Management orgs or if the B2B Commerce license is enabled.

Fields

Field	Details
AdjustedLineAmount	Type currency
	Properties Filter, Nullable, Sort

Field	Details
	Description Total, including line adjustments but not order-level adjustments or tax, of the OrderItemSummary. This is a calculated field.
AdjustedLineAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Total price of the OrderItemSummary, inclusive of adjustments and tax. This amount is equal to AdjustedLineAmount + TotalAdjustedLineTaxAmount. This is a calculated field. This field is available in API version 49.0 and later.
AssetId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the associated asset. This field is available in API version 60.0 and later. This field is a relationship field. Relationship Name Asset Relationship Type Lookup Refers To Asset
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Available only for orgs with the multicurrency feature enabled. ISO code for the currency of the OrderSummary associated with the OrderItemSummary. Possible values are: • DKK—Danish Krone • EUR—Euro • GBP—British Pound • USD—U.S. Dollar The default value is USD.

Field	Details
	This field is available in API version 49.0 and later.
DeliveryEstimationReference	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Unique reference ID for the delivery estimation.
DeliveryEstimationTimeZone	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Timezone in which the estimated delivery times are based.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the OrderItemSummary. This field can be edited.
EarliestEstimatedDeliveryDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Earliest date when the item is estimated to be delivered.
EarliestEstimatedDeliveryTime	Type timeOnly Properties Create, Filter, Group, Nillable, Sort, Update Description Earliest time of the day when the item is estimated to be delivered.
EndDate	Type date Properties Filter, Group, Nillable, Sort

Field	Details
	Description End date of the OrderItemSummary. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
GrossUnitPrice	Type currency Properties Filter, Nillable, Sort Description Unit price, including tax, of the OrderItemSummary. This value is equal to UnitPrice + the amount of tax on the UnitPrice. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field. This field is available in API version 49.0 and later.
LastEstimatedDeliveryDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Latest date when the item is estimated to be delivered.
LastEstimatedDeliveryTime	Type timeOnly Properties Create, Filter, Group, Nillable, Sort, Update Description Latest time of the day when the item is estimated to be delivered.
LineNumber	Type int Properties Filter, Group, Nillable, Sort Description The order line number assigned to this OrderItemSummary. For example, if this object is the third in the displayed list of OrderItemSummaries belonging to the OrderSummary, this value is 3.

Field	Details
	If the <code>OrderLifeCycleType</code> field on the associated <code>OrderSummary</code> is set to <code>UNMANAGED</code>, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
<code>ListPrice</code>	Type currency Properties Filter, Nillable, Sort Description List price of the product represented by this <code>OrderItemSummary</code>. If the <code>OrderLifeCycleType</code> field on the associated <code>OrderSummary</code> is set to <code>UNMANAGED</code>, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
<code>MainOrderItemSummaryId</code>	Type reference Properties Create, Filter, Group, Sort Description The primary order item summary ID of this order item summary. This field is a relationship field. Relationship Name MainOrderItemSummary Relationship Type Master-detail Refers To OrderItemSummary (the master object)
<code>Name</code>	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the <code>OrderItemSummary</code>.
<code>OrderDeliveryGroupSummaryId</code>	Type reference Properties Filter, Group, Sort Description ID of the <code>OrderDeliveryGroupSummary</code> to which this object belongs.

Field	Details
	This field is a relationship field. Relationship Name OrderDeliveryGroupSummary Relationship Type Lookup Refers To OrderDeliveryGroupSummary
OrderManagementBillingType	Type enum Properties Filter, Restricted Picklist, Sort Description The type of entitlement, either PPO or GMV, that is used to track Order Summary usage.
OrderSummaryId	Type reference Properties Filter, Group, Sort Description ID of the OrderSummary to which this object belongs. This field is a relationship field. Relationship Name OrderSummary Relationship Type Lookup Refers To OrderSummary
OriginalOrderItemId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the original order item associated with this summary object. Nillable=true only if the associated order summary is unmanaged. For managed order summaries, nillable=false. This field is a relationship field. Relationship Name OriginalOrderItem Relationship Type Lookup

Field	Details
	Refers To OrderItem
PricebookEntryId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the pricebook entry associated with this OrderItemSummary. This field is available in API version 54.0 and later. This field is a relationship field. Relationship Name PricebookEntry Relationship Type Lookup Refers To PricebookEntry
Product2Id	Type reference Properties Filter, Group, Sort Description ID of the product represented by this OrderItemSummary. This field is a relationship field. Relationship Name Product2 Relationship Type Lookup Refers To Product2
ProductCode	Type string Properties Filter, Group, Nillable, Sort Description Product code of the product represented by this OrderItemSummary.
Quantity	Type double

Field	Details
	Properties Filter, Sort Description Current total quantity of products represented by this order item summary. Equal to QuantityOrdered minus (QuantityCanceled and QuantityReturned). If the OrderLifeCycleType field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
QuantityAllocated	Type double Properties Filter, Sort Description Allocated quantity on this order item summary. This quantity is associated with one or more FulfillmentOrderLineItems. If the OrderLifeCycleType field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
QuantityAvailableToCancel	Type double Properties Filter, Nillable, Sort Description Quantity that can still be canceled on this OrderItemSummary. Equal to QuantityOrdered minus (QuantityCanceled and QuantityAllocated). This value duplicates QuantityAvailableToFulfill. This is a calculated field.
QuantityAvailableToFulfill	Type double Properties Filter, Nillable, Sort Description Quantity available to be fulfilled on this OrderItemSummary. Equal to QuantityOrdered minus (QuantityCanceled and QuantityAllocated). This value duplicates QuantityAvailableToCancel. This is a calculated field.
QuantityAvailableToReship	Type double Properties Filter, Nillable, Sort

Field	Details
	Description Quantity available to be reshipped on this OrderItemSummary. Equal to QuantityFulfilled minus (QuantityReshipped and QuantityReturnInitiated). This field is available in API version 53.0 and later. This is a calculated field.
QuantityAvailableToReturn	Type double Properties Filter, Nillable, Sort Description Quantity available to be returned on this OrderItemSummary. Equal to QuantityFulfilled minus QuantityReturnInitiated. This is a calculated field.
QuantityCanceled	Type double Properties Filter, Sort Description Canceled quantity on this OrderItemSummary. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
QuantityFulfilled	Type double Properties Filter, Sort Description Fulfilled quantity on this OrderItemSummary. This quantity can no longer be canceled. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
QuantityNetOrdered	Type double Properties Filter, Nillable, Sort Description Quantity available to be allocated on this OrderItemSummary. Equal to QuantityOrdered minus QuantityCanceled.

Field	Details
QuantityOrdered	Type double Properties Filter, Sort Description Ordered quantity on this OrderItemSummary. It includes the originally ordered quantity plus any quantity added to the order later. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
QuantityReshipped	Type double Properties Filter, Nillable, Sort Description Reshipped quantity on this OrderItemSummary. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field. This field is available in API version 53.0 and later.
QuantityReturned	Type double Properties Filter, Sort Description Returned quantity on this OrderItemSummary. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
QuantityReturnInitiated	Type double Properties Filter, Sort Description Quantity returned or pending return on this OrderItemSummary. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.

Field	Details
QuantityShipped	Type double Properties Create, Filter, Nillable, Sort, Update Description Quantity shipped on this OrderItemSummary. This field is available in API version 52.0 and later.
ReferencePrice	Type currency Properties Create, Filter, Nillable, Sort Description The original or reference price of the order product. This field is available in API version 63.0 and later.
ReservedAtLocationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Reserved for future use.
ServiceDate	Type date Properties Filter, Group, Nillable, Sort Description Service or start date of the OrderItemSummary. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
Status	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Status of the OrderItemSummary. The default value is ORDERED. When a quantity value changes, each status formula is evaluated in order. If a formula is true, no more evaluations are performed for that change.

Field	Details
	Possible values and their formulas, in the order of evaluation, are: • RETURNINITIATED—Return Initiated — (Quantity > 0) & (QuantityReturnInitiated = QuantityFulfilled) & (QuantityReturned < QuantityReturnInitiated) • RESHIPED—Reshipped — (QuantityReshipped = QuantityFullfilled) & (QuantityFullfilled > 0) & (QuantityReturnInitiated = 0) & (QuantityFullfilled = QuantityOrdered) • RETURNED—Returned — (Quantity = 0) & (QuantityReturned > 0) • CANCELED—Canceled — (Quantity = 0) & (QuantityCancelled > 0) & (QuantityReturned = 0) • FULFILLED—Fulfilled — (Quantity > 0) & ((QuantityOrdered - QuantityCancelled) <= QuantityFulfilled) • PARTIALLYFULFILLED—Partially Fulfilled — (QuantityFulfilled > 0) & (QuantityFulfilled < (QuantityOrdered - QuantityCancelled)) • ALLOCATED—Allocated — (Quantity > 0) & (Quantity <= QuantityAllocated) • PARTIALLYALLOCATED—Partially Allocated — (QuantityAllocated > 0) & (QuantityAllocated < Quantity) • ORDERED—Ordered — None of the other formulas apply • PAID—Paid — N/A
StockKeepingUnit	Type string Properties Filter, Group, Nillable, Sort Description The stock keeping unit (SKU) of the Product2 associated with the OrderItemSummary. This field is available in API version 49.0 and later.
TaxTreatmentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the related tax treatment. This field is available in API version 63.0 and later. This field is available with Subscription Management. This field is a relationship field. Relationship Name TaxTreatment Relationship Type Lookup

Field	Details
	Refers To TaxTreatment
TotalAdjustedLineTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the AdjustedLineAmount. This is a calculated field.
TotalAdjustmentAmount	Type currency Properties Filter, Nillable, Sort Description Total of all price adjustments applied to this OrderItemSummary. This is a calculated field.
TotalAdjustmentAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Total amount of all price adjustments applied to this OrderItemSummary, inclusive of tax. This amount is equal to TotalAdjustmentAmount + TotalAdjustmentTaxAmount. This field is available in API version 49.0 and later. This is a calculated field.
TotalAdjustmentDistAmount	Type currency Properties Filter, Nillable, Sort Description Total of all order-level price adjustments applied to this OrderItemSummary. This value includes OrderItemAdjustmentLineSummaries that belong to OrderAdjustmentGroupSummaries of type Header. This is a calculated field.
TotalAdjustmentDistAmtWithTax	Type currency Properties Filter, Nillable, Sort

Field	Details
	Description Total amount of the order-level price adjustments applied to this OrderItemSummary, inclusive of tax. This amount is equal to TotalAdjustmentDistAmount + TotalAdjustmentDistTaxAmount. This field is available in API version 49.0 and later. This is a calculated field.
TotalAdjustmentDistTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalAdjustmentDistAmount. This is a calculated field.
TotalAdjustmentTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalAdjustmentAmount. This is a calculated field.
TotalAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Total price of the OrderItemSummary, inclusive of tax. This amount is equal to TotalPrice + TotalTaxAmount. This field is available in API version 49.0 and later. This is a calculated field.
TotalLineAdjustmentAmount	Type currency Properties Filter, Nillable, Sort Description Total of all non-order-level price adjustments applied to this OrderItemSummary. This value includes OrderItemAdjustmentLineSummaries that don't belong to an OrderAdjustmentGroupSummary, or that belong to an OrderAdjustmentGroupSummary of type SplitLine. This is a calculated field.
TotalLineAdjustmentAmtWithTax	Type currency

Field	Details
	Properties Filter, Nillable, Sort Description Total of all non-order-level price adjustments applied to this OrderItemSummary, inclusive of tax. This amount is equal to TotalLineAdjustmentAmount + TotalLineAdjustmentTaxAmount. This field is available in API version 49.0 and later. This is a calculated field.
TotalLineAdjustmentTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalLineAdjustmentAmount. This is a calculated field.
TotalLineAmount	Type currency Properties Filter, Nillable, Sort Description Total, not including adjustments or tax, of the OrderItemSummary. If the OrderLifeCycleType field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
TotalLineAmountWithTax	Type currency Properties Filter, Nillable, Sort Description Total unadjusted amount of the OrderItemSummary, inclusive of tax. This amount is equal to TotalLineAmount + TotalLineTaxAmount. This field is available in API version 49.0 and later. This is a calculated field.
TotalLineTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalLineAmount. This is a calculated field.

Field	Details
TotalPrice	Type currency Properties Filter, Nillable, Sort Description Total, including line and order-level adjustments but not tax, of the OrderItemSummary. This is a calculated field.
TotalTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalPrice. This is a calculated field.
Type	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Type of the OrderItemSummary. Delivery Charge indicates that the OrderItemSummary represents a delivery charge. Fee indicates that it represents another type of fee, such as a return fee. Order Product indicates that it represents any other type of product, service, or charge. Each type corresponds to one type code, shown here in parentheses. Possible values are: • Delivery Charge (Charge) • Fee (Charge) This value is available in API v56.0 and later. • Order Product (Product) If the OrderLifeCycleType field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
TypeCode	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Type code of the OrderItemSummary. Charge indicates that the OrderItemSummary represents a charge or fee. Product indicates that it represents any other type of product, service, or charge. A type code can be associated with one or more types. Possible values are:

Field	Details
	• Charge • Product If the <code>OrderLifeCycleType</code> field on the associated <code>OrderSummary</code> is set to <code>UNMANAGED</code>, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
UnitPrice	Type currency Properties Filter, Nillable, Sort Description Unit price of the product represented by the <code>OrderItemSummary</code>. If the <code>OrderLifeCycleType</code> field on the associated <code>OrderSummary</code> is set to <code>UNMANAGED</code>, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[OrderItemSummaryChangeEvent](#) (API version 62.0)

Change events are available for the object.

SEE ALSO:

[FulfillmentOrderLineItem](#)

[OrderItem](#)

[OrderItemAdjustmentLineSummary](#)

[OrderItemTaxLineItemSummary](#)

[OrderSummary](#)

OrderItemSummaryChange

Represents a change to an `OrderItemSummary`, usually a reduction in quantity due to a cancel or return. Corresponds to a change order item. This object is available in API version 48.0 and later.

This object is used for calculations and doesn't have a default record page.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is only available in Salesforce Order Management orgs.

Fields

Field	Details
ChangeOrderItemId	Type reference Properties Filter, Group, Sort Description ID of the associated change order item.
ChangeType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Type of change represented by the OrderItemSummaryChange. Possible values are: • Add • AddTax • Cancel • CancelFee • DeliveryChargeAdjustment • FeeAdjustment • Modify • OrderAdjustmentGroup • OrderDeliveryGroup • ProductAdjustment • Return • ReturnFee
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description ISO code for the currency of the OrderSummary associated with the OrderItemSummaryChange. The default value is USD.

Field	Details
	Possible values are: • DKK—Danish Krone • EUR—Euro • GBP—British Pound • USD—U.S. Dollar This field is available in API version 49.0 and later.
IsPreFulfillment	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the change occurs before the OrderItemSummary has been fulfilled.
OrderItemSummary ChangeNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description ID of the OrderItemSummaryChange.
OrderItemSummaryId	Type reference Properties Filter, Group, Sort Description ID of the OrderItemSummary to which the change applies.
OrderSummaryId	Type reference Properties Filter, Group, Sort Description ID of the OrderSummary to which the associated OrderItemSummary belongs.
Reason	Type picklist Properties Defaulted on create, Filter, Group, Sort Description Reason for the change. You can customize this list.

Field	Details
	The list has one default value: Unknown

Associated Objects

This object has the following associated objects. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

OrderItemSummaryChangeChangeEvent (API version 62.0)
Change events are available for the object.

SEE ALSO:

[OrderItem](#)

[OrderItemSummary](#)

OrderItemSummaryRelationship

Junction object used to track how an original order summary (created before any exchanges have occurred) relates to other order summary objects in a chain of exchange orders. This object is available in API version 60.0 and later. An exchange order is an OrderSummary object whose SourceProcess property is set to Exchange. An original order summary can have an exchange order, which in turn can have yet another exchange order, and so on. The OrderSummaryRelationship object maintains this relationship between OrderSummary objects.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AssociatedOrderItemInventory	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Controls whether the inventory of the associated order item is included in the inventory of the main order item. Possible values are: - IncludedInMainInventory—Included in Main Inventory - NotIncludedInMainInventory—Not Included in Main Inventory
AssociatedOrderItemSumPricing	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description An enum that describes how the related order item summary is priced relative to the primary order item summary. Possible values are: - IncludedInBundlePrice—Included in Bundle Price - NotIncludedInBundlePrice—Not Included in Bundle Price
AssociatedOrderItemSummaryId	Type reference Properties Create, Filter, Group, Sort Description The related order item summary of this order item summary relationship. For bundle relationships, this denotes the ID of the child order item summary. This field is a relationship field. Relationship Name AssociatedOrderItemSummary Refers To OrderItemSummary
AssociatedOrderItemSummaryRole	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The role of the associated order item summary of this relationship. Possible values are:

Field	Details
	• <code>AddOnComponent</code>—Addon Component • <code>BundleComponent</code>—Bundle Component • <code>ClassificationComponent</code>—Product Classification Component • <code>SetComponent</code>—Set Component
<code>AssociatedQuanScaleMethod</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description An enum that describes how to scale the quantity of the associated order item summary relative to the main order item summary. Possible values are: • <code>Constant</code> • <code>Proportional</code> The default value is <code>Proportional</code>.
<code>CurrencyIsoCode</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The ISO code for the currency of the OrderSummary. Possible values are: • <code>USD</code>—U.S. Dollar The default value is <code>USD</code>.
<code>MainOrderItemSummaryId</code>	Type reference Properties Create, Filter, Group, Sort Description The primary order item summary ID of this order item summary relationship. This field is a relationship field. Relationship Name <code>MainOrderItemSummary</code> Relationship Type Master-detail Refers To <code>OrderItemSummary</code> (the master object)

Field	Details
MainOrderItemSummaryRole	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The role of the primary order item summary of this relationship. Possible values are: • AddOn—Addon Parent • Bundle—Bundle Parent • Set—Set Parent
MainOrderSummaryId	Type reference Properties Create, Filter, Group, Sort Description The ID of the main order item summary. This field is a relationship field. Relationship Name MainOrderSummary Refers To OrderSummary
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the relationship.
OrderItemRelationshipId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The order summary ID of the order item summary. This field is a relationship field. Relationship Name OrderItemRelationship

Field	Details
	Refers To OrderItemRelationship
ProductRelatedComponentId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The lookup ID from the product related component. This field is a relationship field. Relationship Name ProductRelatedComponent Refers To ProductRelatedComponent
ProductRelationshipTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The lookup from the product relationship type. This field is a relationship field. Relationship Name ProductRelationshipType Refers To ProductRelationshipType

OrderItemTaxLineItem

The tax amount that has been applied to an order item. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access Commerce Orders entities, your org must have a Salesforce Order Management license. Commerce Orders entities are available only in Lightning Experience.

Fields

Field	Details
Amount	Type currency Properties Create, Filter, Sort, Update Description The total amount of the tax line. The value is rounded to the nearest possible amount associated with the currency of the order item.
CalculationReferenceNumber	Type string Properties Create, Filter, Group, Nillable, Sort Description Reference number provided by the tax provider, such as Stripe, in the tax calculation API response. This field is available in API version 62.0.
Description	Type textarea Properties Create, Nillable, Update Description Users can add a custom description to the record to provide additional detail.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the tax line.
OrderId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the parent order for the order item related to the tax line
OrderItemAdjustmentLineItemId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The order item adjustment line item that the tax line applies to.
OrderItemId	Type reference Properties Create, Filter, Group, Sort Description The order item that the tax line applies to.
Rate	Type percent Properties Create, Filter, Nillable, Sort, Update Description The percentage value of the tax. Null if the tax is a flat amount.
ReferenceNumber	Type string Properties Create, Filter, Group, Nillable, Sort Description Reference number provided by the tax provider (like Stripe) for each line item in the tax calculation API call. Use this unique ID to revert taxes during cancellation or return of an order. This field is available in API version 62.0.
RelatedTaxLineItemId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The original order item tax line. Useful for reference in change order scenarios.
TaxEffectiveDate	Type date Properties Create, Filter, Group, Sort, Update

Field	Details
	Description The date used to calculate the effective tax rate. This field may require an update to accommodate different buyer time zones.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Shows whether the amount on the tax line is an estimate or the final calculated amount. Doesn't set a value by default. Users can define automation to set and change the value as needed. Possible values are: • Actual • Estimated

OrderItemTaxLineItemSummary

Represents the current tax on an OrderItemSummary or OrderItemAdjustmentLineSummary. Corresponds to one or more order item tax line items, consisting of an original object and any change objects applicable to it. This object is available in API version 48.0 and later.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`

Special Access Rules

This object is only available in Salesforce Order Management orgs or if the B2B Commerce license is enabled.

Fields

Field	Details
Amount	Type currency Properties Filter, Sort Description Amount of tax represented by the OrderItemTaxLineItemSummary.

Field	Details
	If the <code>OrderLifeCycleType</code> field on the associated <code>OrderSummary</code> is set to <code>UNMANAGED</code>, then users with the <code>Edit Unmanaged Order Summaries</code> or <code>B2B Commerce Integrator</code> user permission can modify this field.
CalculationReferenceNumber	Type string Properties Filter, Group, Nillable, Sort Description Reference number provided by the tax provider, such as Stripe, in the tax calculation API response.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description ISO code for the currency of the <code>OrderSummary</code> associated with the <code>OrderItemTaxLineItemSummary</code>. The default value is <code>USD</code>. Possible values are: • <code>DKK</code>—Danish Krone • <code>EUR</code>—Euro • <code>GBP</code>—British Pound • <code>USD</code>—U.S. Dollar This field is available in API version 49.0 and later.
Description	Type textarea Properties Nillable, Update Description Description of the <code>OrderItemTaxLineItemSummary</code>. This field can be edited.
Name	Type string Properties Filter, Group, idLookup, Sort, Update Description Name of the <code>OrderItemTaxLineItemSummary</code>.

Field	Details
OrderItemAdjustmentLineSummaryId	Type reference Properties Filter, Group, Nillable, Sort Description If this object represents tax on an adjustment, this value is the ID of the OrderItemAdjustmentLineSummary to which the tax applies. If this value is null, the adjustment applies to an OrderItemSummary.
OrderItemSummaryId	Type reference Properties Filter, Group, Sort Description If this object represents tax on an OrderItemSummary, this value is the ID of that OrderItemSummary. If this object represents tax on an adjustment, this value is the ID of the OrderItemSummary to which the adjustment applies.
OrderSummaryId	Type reference Properties Filter, Group, Sort Description ID of the OrderSummary that the associated OrderItemSummary or OrderItemAdjustmentLineSummary belongs to.
OriginalOrderItemTaxLineItemId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the original order item tax line item associated with this summary object. Nillable=true only if the associated order summary is unmanaged. For managed order summaries, nillable=false.
Rate	Type percent Properties Filter, Nillable, Sort Description Tax rate used to calculate the Amount.

Field	Details
	If the <code>OrderLifeCycleType</code> field on the associated <code>OrderSummary</code> is set to <code>UNMANAGED</code>, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
<code>ReferenceNumber</code>	Type string Properties Filter, Group, Nillable, Sort Description Reference number provided by the tax provider (like Stripe) for each line item in the tax calculation API call. Use this unique ID to revert taxes during cancellation or return of an order.
<code>TaxEffectiveDate</code>	Type date Properties Filter, Group, Sort Description Date on which the Amount was calculated. Important due to tax rate changes over time. If the <code>OrderLifeCycleType</code> field on the associated <code>OrderSummary</code> is set to <code>UNMANAGED</code>, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
<code>TransactionReferenceNumber</code>	Type string Properties Filter, Group, Nillable, Sort, Update Description Reference number provided by the tax provider, such as Stripe, in the tax transaction commit API request.
<code>Type</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Indicates whether the Amount is actual or estimated. Possible values are: • Actual • Estimated

Field	Details
	If the <code>OrderLifeCycleType</code> field on the associated <code>OrderSummary</code> is set to <code>UNMANAGED</code> , then users with the <code>Edit Unmanaged Order Summaries</code> or <code>B2B Commerce Integrator</code> user permission can modify this field.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[OrderItemTaxLineItemSummaryChangeEvent](#) (API version 62.0)

Change events are available for the object.

SEE ALSO:

[FulfillmentOrderItemTax](#)

[OrderItemAdjustmentLineSummary](#)

[OrderItemSummary](#)

[OrderItemTaxLineItem](#)

OrderItemType

Shows whether the order product is a product line or charge line. This object is available in API version 48.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
<code>ApiName</code>	Type string Properties Filter, Group, idLookup, Sort Description Uniquely identifies a picklist value so it can be retrieved without using an id or primary label.
<code>IsDefault</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Indicates whether this is the default order item type status value (<code>true</code>) or not (<code>false</code>) in the picklist.
MasterLabel	Type string Properties Filter, Group, Nillable, Sort Description Master label for this order item type status value. This display value is the internal label that doesn't get translated.
SortOrder	Type int Properties Filter, Group, Nillable, Sort Description Number used to sort this value in the order item status picklist. These numbers aren't guaranteed to be sequential, as some previous contract status values might have been deleted.
TypeCode	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Code indicating the type of order item. Possible values are: • <code>Charge</code>—API Name <code>DeliveryCharge</code>. • <code>Product</code>—For API Name <code>Product</code>.

OrderOwnerSharingRule

Represents a rule which determines order sharing access for the order's owners.



Note: To enable access to this object for your org, contact Salesforce customer support. However, we recommend that you instead use Metadata API to programmatically update owner sharing rules because it triggers automatic sharing rule recalculation. The [SharingRules](#) Metadata API type is enabled for all orgs.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
CreatedById	Type reference Properties Defaulted on create, Filter, Group, Sort Description ID of the creator of the order owner sharing rule.
CreatedDate	Type dateTime Properties Defaulted on create, Filter, Sort Description Date when the order owner sharing rule was created.
Description	Type string Properties Create, Filter, Nillable, Sort, Update Description Description of the order owner sharing rule. Maximum length is 1,000 characters.
DeveloperName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Name of the developer of the order owner sharing rule.
GroupId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort Description ID of the group whose orders are shared.
Id	Type ID Properties Defaulted on create, Filter, Group, idLookup, Sort Description ID of the order owner sharing rule.
LastModifiedById	Type reference Properties Defaulted on create, Filter, Group, Sort Description ID of the user who last modified the order owner sharing rule.
LastModifiedDate	Type dateTime Properties Defaulted on create, Filter, Sort Description Date when the order owner sharing rule was last modified.
Name	Type string Properties Create, Filter, Group, idLookup, Namefield, Sort, Update Description Name of the order owner sharing rule. Maximum length is 80 characters.
OrderAccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Access level for the order owner sharing rule.
SystemModstamp	Type dateTime

Field	Details
	Properties Defaulted on create, Filter, Sort Description System modification time for the order owner sharing rule.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the user or group with whom order access is shared.

Usage

Use this object to manage the sharing rules for orders. For example, the following code creates an order owner sharing rule between two public groups, which can also contain portal users.

```
OrderOwnerSharingRule rule = new OrderOwnerSharingRule();
rule.setName("RuleName"); // Set the sharing rule name
rule.setDeveloperName("RuleDeveloperName"); // Set the sharing rule developer name
rule.setGroupId("00Gx000000000000"); // Set the group of users to share records from
rule.setUserOrGroupId("00Gx000000000001"); // Set the group of users to share records to
rule.setOrderAccessLevel("Edit");
connection.create(rule);
```

SEE ALSO:

[Metadata API Developer Guide: SharingRules](#)

OrderPaymentSummary

Represents the current properties and state of payments using a single payment method that are applied to one OrderSummary. This object is available in API version 48.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Unlike most summary objects, an OrderPaymentSummary isn't related to a similarly named order payment object. Instead, it combines values from multiple payment objects that use the same payment method and apply to the same OrderSummary.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is only available in Salesforce Order Management orgs or if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
AuthorizationAmount	Type currency Properties Filter, Nillable, Sort Description Amount of the OrderPaymentSummary that has been authorized.
AuthorizationReversalAmount	Type currency Properties Filter, Nillable, Sort Description Amount of the AuthorizationAmount that has been reversed.
AvailableToCaptureAmount	Type currency Properties Filter, Nillable, Sort Description Amount of the OrderPaymentSummary that's available to be captured. Equal to AuthorizationAmount minus (CapturedAmount and PendingCaptureAmount and AuthorizationReversalAmount and PendingReverseAuthAmount). However, if the calculated amount is a negative number, this value is 0.
AvailableToRefundAmount	Type currency Properties Filter, Nillable, Sort Description Amount of the OrderPaymentSummary that's available to be refunded. Equal to CapturedAmount plus PendingCaptureAmount minus (RefundedAmount and PendingRefundAmount). However, if the calculated amount is a negative number, this value is 0.
BalanceAmount	Type currency

Field	Details
	Properties Filter, Nillable, Sort Description Total balance of all payments associated with this summary object.
CapturedAmount	Type currency Properties Filter, Nillable, Sort Description Amount of the OrderPaymentSummary that has been captured.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for the currency of the OrderSummary associated with the OrderPaymentSummary. Order Management APIs and actions that create an OrderPaymentSummary for an OrderSummary set this value. The default value is USD. Possible values are: • DKK—Danish Krone • EUR—Euro • GBP—British Pound • USD—U.S. Dollar This field is available in API version 49.0 and later.
FullName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The full name of the payment method user.
LastPaymentGatewayLogId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the most recent payment gateway log associated with the OrderPaymentSummary.

Field	Details
LastPaymentGatewayMessage	Type string Properties Create, Filter, Nillable, Sort, Update Description The most recent message received from the payment gateway associated with the OrderPaymentSummary.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp when the current user last viewed a record related to this record. This field is available in API version 49.0 and later.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp when the current user last viewed this record. A null value can mean that this record was only referenced (LastReferencedDate) and not viewed. This field is available in API version 49.0 and later.
Method	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the OrderPaymentSummary.
OrderSummaryId	Type reference Properties Create, Filter, Group, Sort Description ID of the OrderSummary associated with the OrderPaymentSummary.
OwnerId	Type reference

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the user who currently owns this OrderPaymentSummary. Default value is the user logged in to the API to perform the create.
PaymentCreditedAmount	Type currency Properties Filter, Nillable, Sort Description Total amount of credit associated with this OrderPaymentSummary. This field is available in API version 65.0 and later.
PaymentMethodId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the payment method associated with this OrderPaymentSummary.
PendingAuthorizationAmount	Type currency Properties Filter, Nillable, Sort Description Amount of the OrderPaymentSummary that's pending authorization.
PendingCaptureAmount	Type currency Properties Filter, Nillable, Sort Description Amount of the OrderPaymentSummary that's pending capture.
PendingRefundAmount	Type currency Properties Filter, Nillable, Sort Description Amount of the OrderPaymentSummary that's pending refund.

Field	Details
PendingReverseAuthAmount	Type currency Properties Filter, Nillable, Sort Description Amount of the AuthorizationAmount that's pending reversal.
RefundedAmount	Type currency Properties Filter, Nillable, Sort Description Amount of the OrderPaymentSummary that was refunded.
ReservedBalanceTotalAmount	Type currency Properties Filter, Nillable, Sort Description Calculated field that summarizes the ReservedBalanceAmount for all OrderPaymentSummaryReferences for the OrderPaymentSummary.
Type	Type string Properties Create, Filter, Group, Sort Description The payment method type associated with the OrderPaymentSummary. For example, visa, mastercard, check, or giftcard.

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

OrderPaymentSummaryChangeEvent (API version 62.0)

Change events are available for the object.

OrderPaymentSummaryFeed

Feed tracking is available for the object.

OrderPaymentSummaryOwnerSharingRule

Sharing rules are available for the object.

OrderPaymentSummaryShare

Sharing is available for the object.

SEE ALSO:

[OrderSummary](#)

[Payment](#)

[PaymentAuthorization](#)

[PaymentMethod](#)

OrderPaymentSummaryReference

OrderPaymentSummaryReference is a junction object that allows an order payment summary to be shared with another order summary. This object is available in API version 60.0 and later.

An order summary can share an order payment summary with any of its child order summaries (exchange order summaries). Each child can share the order payment summary with its children, and so on. Conceptually, the original order summary and its children form a tree structure, with the original order summary as the root node. If a new order payment summary is created for an exchange order summary anywhere in the tree, the new order payment summary can only be shared with that exchange order summary's children (and their descendents), if any.

The purpose of the OrderPaymentSummaryReference object is to establish how order summaries share order payment summaries. This is only possible if the relationship between the two order summaries has already been established. A corresponding OrderSummaryRelationship record must already exist that relates a parent order summary (MainOrderSummary) with its child (AssociateOrderSummary). The record's AssociatedRelationshipType field must be set to Exchange.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is only available in Salesforce Order Management orgs or if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
AuthorizationAmount	Type currency Properties Filter, Nillable, Sort Description Amount of the OrderPaymentSummary that has been authorized.

Field	Details
CapturedAmount	Type currency Properties Filter, Nillable, Sort Description Amount of the OrderPaymentSummary that has been captured.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for the currency of the OrderSummary associated with the OrderPaymentSummary. Order Management APIs and actions that create an OrderPaymentSummary for an OrderSummary set this value. The default value is USD. Possible values are: • EUR—Euro • USD—U.S. Dollar The default value is USD.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp when the current user last viewed a record related to this record. This field is available in API version 49.0 and later.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp when the current user last viewed this record. A null value can mean that this record was only referenced (LastReferencedDate) and not viewed. This field is available in API version 49.0 and later.
Method	Type string

Field	Details
	Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the OrderPaymentSummary.
OrderPaymentSummaryId	Type reference Properties Create, Filter, Group, Sort Description ID of the OrderPaymentSummary shared with the OrderSummary (exchange order). This field is a relationship field. Relationship Name OrderPaymentSummary Relationship Type Lookup Refers To OrderPaymentSummary
OrderSummaryId	Type reference Properties Create, Filter, Group, Sort Description ID of the OrderSummary (exchange order) that the OrderPaymentSummary is shared with. This field is a relationship field. Relationship Name OrderSummary Relationship Type Lookup Refers To OrderSummary
RefundedAmount	Type currency Properties Filter, Nillable, Sort Description Amount of the OrderPaymentSummary that was refunded.

Field	Details
ReservedBalanceAmount	Type currency Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description Reserved balance amount for the exchange order for the order payment summary relationship.
ReservedBalanceTotalAmount	Type currency Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description Summary of all the ReservedBalanceAmount for all the order payment summary references.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Type of reference between the OrderSummary and the OrderPaymentSummary. Possible values are: • Shared

OrderShare

Represents a sharing entry on an Order. This object is available in API version 48.0 and later.

You can only create, edit, and delete sharing entries for standard objects whose `RowCause` field is set to `Manual`. Sharing entries for standard objects with different `RowCause` values are created as a result of your Salesforce org's sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren't stored at all.



Note: While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it's possible that we'll stop storing certain share records to improve performance. As a best practice, don't create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
OrderAccessLevel	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Level of access that the user or group has to the order. Possible values are: • All—Owner. This value isn't valid when creating, updating, or deleting records. • Edit—Read/Write • Read—Read Only
OrderId	Type reference Properties Filter, Group, Sort Description ID of the order associated with this sharing entry. This field can't be updated. This is a relationship field. Relationship Name Order Relationship Type Lookup Refers To Order
RowCause	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is Manual. If no value is specified, the field defaults to Manual. All other RowCause values are read-only. After the sharing entry is created, this field can't be edited.
UserOrGroupId	Type reference Properties Filter, Group, Sort

Field	Details
	Description ID of the user or group that has been given access to the order. This field can't be updated. This is a polymorphic relationship field.
	Relationship Name UserOrGroup
	Relationship Type Lookup
	Refers To Group, User

Usage

This object allows you to determine which users and groups can view or edit orders owned by other users.

If you attempt to create a record that matches an existing record, any modified fields are updated, the system returns the existing record.

OrderStatus

Represents the status of the order entity. This object is available in API version 48.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
ApiName	Type string Properties Filter, Group, idLookup, Sort Description Uniquely identifies a picklist value so it can be retrieved without using an id or primary label.
IsDefault	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Indicates whether this is the default order status value (<code>true</code>) or not (<code>false</code>) in the picklist.
MasterLabel	Type string Properties Filter, Group, Nillable, Sort Description Master label for this order status value. This display value is the internal label that doesn't get translated.
SortOrder	Type int Properties Filter, Group, Nillable, Sort Description Number used to sort this value in the order status picklist. These numbers aren't guaranteed to be sequential, as some previous contract status values might have been deleted.
StatusCode	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Status of the order. Possible values are: • <code>Activated</code> • <code>Draft</code> • <code>Superseded</code>—This value is applicable only to Revenue Cloud Advanced users and is available in API version 64.0 and later.

Usage

This object represents a value in the order status picklist. The order status picklist provides additional information about the status of an Order, such as its current state (`Draft`, `Activated`, or `Superseded`). You can query these records to retrieve the set of values in the order status picklist, and then use that information while processing Order objects to determine more information about a given order. For example, the application could test whether a given order is activated based on its Status value and the value of the StatusCode property in the associated OrderStatus object.

OrderSummary

Represents the current properties and state of an order. Corresponds to one or more order objects, consisting of an original object and any change objects applicable to it. This object is available in API version 48.0 and later.

For performance and data integrity reasons, CRUD operations on OrderSummary records don't fire Apex triggers.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is only available in Salesforce Order Management orgs or if the B2B Commerce license is enabled.

Fields

Field	Details
AccountId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the account or person account associated with the OrderSummary. It represents the shopper in the storefront. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field. This field is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
ActiveProcess ExceptionCount	Type int Properties Filter, Group, Nillable, Sort Description Total number of active process exceptions on the OrderSummary.

Field	Details
	This field is available in API version 50.0 and later.
BillingAddress	Type address Properties Filter, Nillable Description Billing address associated with the OrderSummary. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
BillingCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Billing address city.
BillingCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Billing address country.
BillingCountryCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The ISO country code for the billing address. The default value is <code>US</code>.
BillingEmailAddress	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description Email address on the billing address.
BillingGeocodeAccuracy	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The accuracy of the geocode for the billing address. Possible values are: • Address • Block • City • County • ExtendedZip • NearAddress • Neighborhood • State • Street • Unknown • Zip
BillingLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with BillingLongitude to specify the precise geolocation of the billing address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places.
BillingLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with BillingLatitude to specify the precise geolocation of the billing address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places.
BillingPhoneNumber	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description Phone number of the billing address.

Field	Details
BillingPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Billing address postal code.
BillingState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Billing address state.
BillingStateCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The ISO state or province code for the billing address.
BillingStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Billing address street.
BillToContactId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the Contact associated with the OrderSummary. It represents the shopper in the storefront when not using person accounts. If the <code>OrderLifeCycleType</code> field is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field. This field is available in API version 49.0 and later.
	Relationship Name BillToContact

Field	Details
	Relationship Type Lookup Refers To Contact
BusinessModel	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The business model of the OrderSummary. Possible values are: • B2B • B2C This field is available in API version 53.0 and later.
ChangeOrderId	Type reference Properties Filter, Group, Nillable, Sort Description Reserved for future use.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only with the multicurrency feature enabled. Contains the ISO code for the currency of the original Order associated with the OrderSummary. Possible values are: • DKK—Danish Krone • EUR—Euro • GBP—British Pound • USD—U.S. Dollar The default value is USD. This field is available in API version 49.0 and later.
Description	Type textarea

Field	Details
	Properties Create, Nillable, Update Description Description of the OrderSummary. This field can be edited.
EffectiveDate	Type date Properties Create, Filter, Group, Sort, Update Description Date at which the order becomes effective. Label is Order Start Date. This field is available in API version 64.0 and later.
ExternalReferenceIdentifier	Type string Properties Filter, Group, idLookup, Nillable, Sort, Update Description Used internally to prevent duplicate records. This value is case-sensitive. In API version 56.0 and later, for orders ingested from B2C Commerce, this value is set to <i>B2C realm ID + "_" + B2C instance ID + "@" + B2C Commerce catalog/domain ID + "@" + B2C Commerce order number</i>. In API version 55.0, the standard B2C Commerce integration set this value to "SFDC" + "@" + <i>nanotime</i> + "@" + <i>UUID</i> and High Scale Orders set it to the value used in later versions. This field is available in API version 54.0 and later.
GrandTotalAmount	Type currency Properties Filter, Nillable, Sort Description Total amount, including adjustments and tax, of the OrderSummary.
IsSuspended	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the OrderSummary is suspended. The default value is false. This field is available in API version 50.0 and later.

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
OperationInProgress	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Current operation. Possible values are: • Cancellation • None
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. A null value can mean that this record has only been referenced (LastReferencedDate) and not viewed.
OrderedDate	Type dateTime Properties Filter, Nillable, Sort Description Date of the original order associated with this OrderSummary. If the OrderLifeCycleType field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.
OrderLifeCycleType	Type picklist Properties Filter, Group, Restricted picklist, Sort

Field	Details
	Description Specifies whether the OrderSummary is managed by Salesforce Order Management (MANAGED) or by an external system (UNMANAGED). An unmanaged OrderSummary is stored in Salesforce for reference purposes. - Some Order Management APIs reject input records that are associated with unmanaged OrderSummaries. - Order Management does not update financial bucket fields on some records that are associated with unmanaged OrderSummaries. - A user with the EditUnmanagedOrderSummaries or B2BCommerceIntegrator permission can edit certain fields on objects related to unmanaged OrderSummaries that are normally only accessible via APIs. Possible values are: - MANAGED—Managed - UNMANAGED—Unmanaged This field is available in API version 49.0 and later.
OrderNumber	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the OrderSummary.
OrderProductLineCount	Type int Properties Filter, Group, Nillable, Sort Description Total number of unique products ordered on this Order Summary. This field is available in API version 52.0 and later.
OriginalOrderId	Type reference Properties Filter, Group, Sort Description ID of the original order associated with this OrderSummary. Label is Original Order. This field is a relationship field. Relationship Name OriginalOrder

Field	Details
	Relationship Type Lookup
	Refers To Order
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who currently owns this OrderSummary. Default value is the ID of the user who created the record. This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
PoDate	Type dateTime
	Properties Create, Filter, Nillable, Sort, Update
	Description Purchase order date associated with this OrderSummary. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field. This field is available in API version 52.0 and later.
PoNumber	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Purchase order number associated with this OrderSummary. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field.

Field	Details
Pricebook2Id	Type reference Properties Filter, Group, Nillable, Sort Description ID of the pricebook associated with this OrderSummary. This field is available in API version 54.0 and later. This field is a relationship field. Relationship Name Pricebook2 Relationship Type Lookup Refers To Pricebook2
RoutingAttempts	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The number of attempts that have been made to route the order summary to inventory locations. This field is available in API version 51.0 and later.
SalesChannelId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the SalesChannel associated with this OrderSummary. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field. This field is a relationship field. Relationship Name SalesChannel Relationship Type Lookup Refers To SalesChannel

Field	Details
SalesStoreId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the RetailStore or WebStore associated with this OrderSummary. If the <code>OrderLifeCycleType</code> field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field. This field is a relationship field. Relationship Name SalesStore Relationship Type Lookup Refers To WebStore
SourceProcess	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Describes the order process that created the OrderSummary. Possible values are: • <code>Exchange</code> The OrderSummary was created by an Exchange process • <code>OrderOnBehalf</code> The OrderSummary was created by an Order on Behalf Of process • <code>Standard</code> The OrderSummary was not created by an Order on Behalf Of or Exchange process This field is available in API version 57.0 and later.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Status of the order summary. Unlike the Status and Status Category fields on the order and FulfillmentOrder objects, this field is optional. We recommend that you use the same values in this picklist that you use in the Status picklist for the order object.

Field	Details
SourceOrderSummaryId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the source order summary that's associated with this OrderSummary. This field is populated when the SourceProcess of this OrderSummary is an exchange process. Relationship Name SourceOrderSummary Relationship Type Lookup Refers To OrderSummary
TaxLocaleType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The system used to handle tax on the original Order associated with the OrderSummary. Gross usually applies to taxes like value-added tax (VAT), and Net usually applies to taxes like sales tax. Automatic taxes use currency to determine if the tax is added on top of the price (excluded) or included in the price. Possible values are: • Gross (displays most prices and taxes as combined values) • Net (displays most prices and taxes as separate values) • Automatic (displays most prices and taxes as combined or separate, based on the currency) If the OrderLifeCycleType field on the associated OrderSummary is set to UNMANAGED, then users with the Edit Unmanaged Order Summaries or B2B Commerce Integrator user permission can modify this field. This field is available in API version 49.0 and later.
TotalAdjDelivery AmtWithTax	Type currency Properties Filter, Nillable, Sort Description Total amount of all OrderItemSummaries of type Delivery Charge belonging to this OrderSummary, inclusive of item-level adjustments and tax. This amount is equal to TotalAdjustedDeliveryAmount + TotalAdjustedDeliveryTaxAmount.

Field	Details
	This field is available in API version 49.0 and later.
TotalAdjDistAmount	Type currency Properties Filter, Nillable, Sort Description Total of distributed adjustments applied to OrderItemSummaries belonging to this OrderSummary. This amount is equal to TotalProductAdjDistAmount plus TotalDeliveryAdjDistAmount.
TotalAdjDistAmountWithTax	Type currency Properties Filter, Nillable, Sort Description Total of distributed adjustments applied to OrderItemSummaries belonging to this OrderSummary, inclusive of tax. This amount is equal to TotalAdjDistAmount plus TotalAdjDistTaxAmount. This field is available in API version 49.0 and later.
TotalAdjDistTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalAdjDistAmount.
TotalAdjFeeAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Total amount of all OrderItemSummaries of type Fee belonging to this OrderSummary, inclusive of item-level adjustments and tax. This amount is equal to TotalAdjustedFeeAmount plus TotalAdjustedFeeTaxAmount. This field is available in API version 56.0 and later.
TotalAdjProductAmtWithTax	Type currency Properties Filter, Nillable, Sort

Field	Details
	Description Total amount of all OrderItemSummaries of type code Product belonging to this OrderSummary, inclusive of item-level adjustments and tax. This amount is equal to TotalAdjustedProductAmount plus TotalAdjustedProductTaxAmount. This field is available in API version 49.0 and later.
TotalAdjustedDeliveryAmount	Type currency Properties Filter, Nillable, Sort Description Total, including item-level adjustments but not order-level adjustments or tax, of all OrderItemSummaries of type Delivery Charge belonging to this OrderSummary.
TotalAdjustedDeliveryTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalAdjustedDeliveryAmount.
TotalAdjustedFeeAmount	Type currency Properties Filter, Nillable, Sort Description Total, including item-level adjustments but not order-level adjustments or tax, of all OrderItemSummaries of type Fee belonging to this OrderSummary. This field is available in API version 56.0 and later.
TotalAdjustedFeeTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalAdjustedFeeAmount. This field is available in API version 56.0 and later.
TotalAdjustedProductAmount	Type currency

Field	Details
	Properties Filter, Nillable, Sort
	Description Total, including item-level adjustments but not order-level adjustments or tax, of all OrderItemSummaries of type code Product belonging to this OrderSummary.
TotalAdjustedProductTaxAmount	Type currency
	Properties Filter, Nillable, Sort
	Description Tax on the TotalAdjustedProductAmount.
TotalAmount	Type currency
	Properties Filter, Nillable, Sort
	Description Total, including adjustments but not tax, of all OrderItemSummaries belonging to this OrderSummary. Equal to TotalAdjustedProductAmount plus TotalAdjustedFeeAmount plus TotalAdjustedDeliveryAmount.
TotalDeliveryAdjDistAmount	Type currency
	Properties Filter, Nillable, Sort
	Description Total of all order-level price adjustments applied to OrderItemSummaries of type Delivery Charge belonging to this OrderSummary. This value includes OrderItemAdjustmentLineSummaries that belong to OrderAdjustmentGroupSummaries of type Header.
TotalDeliveryAdjDistAmtWithTax	Type currency
	Properties Filter, Nillable, Sort
	Description Total of all order-level price adjustments applied to OrderItemSummaries of type Delivery Charge belonging to this OrderSummary, inclusive of tax. This value includes OrderItemAdjustmentLineSummaries that belong to OrderAdjustmentGroupSummaries of type Header. It is equal to TotalDeliveryAdjDistAmount + TotalDeliveryAdjDistTaxAmount. This field is available in API version 49.0 and later.

Field	Details
TotalDeliveryAdjDistTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalDeliveryAdjDistAmount.
TotalDeliveryAmount	Type currency Properties Filter, Nillable, Sort Description Sum of the Total Line Amounts of all OrderItemSummaries of type Delivery Charge belonging to this OrderSummary, not including adjustments or tax. This field is available in API version 54.0 and later.
TotalDeliveryAmountWithTax	Type currency Properties Filter, Nillable, Sort Description Total of all OrderItemSummaries of type Delivery Charge belonging to this OrderSummary, including tax but not including adjustments. It is equal to TotalDeliveryAmount + TotalDeliveryTaxAmount. This field is available in API version 54.0 and later.
TotalDeliveryTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalDeliveryAmount. This field is available in API version 54.0 and later.
TotalFeeAdjDistAmount	Type currency Properties Filter, Nillable, Sort

Field	Details
	Description Total of all order-level price adjustments applied to OrderItemSummaries of type Fee belonging to this OrderSummary. This value includes OrderItemAdjustmentLineSummaries that belong to OrderAdjustmentGroupSummaries of type Header. This field is available in API version 56.0 and later.
TotalFeeAdj DistAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Total of all order-level price adjustments applied to OrderItemSummaries of type Fee belonging to this OrderSummary, inclusive of tax. This value includes OrderItemAdjustmentLineSummaries that belong to OrderAdjustmentGroupSummaries of type Header. It is equal to TotalFeeAdjDistAmount + TotalFeeAdjDistTaxAmount. This field is available in API version 56.0 and later.
TotalFeeAdj DistTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalFeeAdjDistAmount. This field is available in API version 56.0 and later.
TotalFeeAmount	Type currency Properties Filter, Nillable, Sort Description Sum of the Total Line Amounts of all OrderItemSummaries of type Fee belonging to this OrderSummary, not including adjustments or tax. This field is available in API version 56.0 and later.
TotalFeeAmountWithTax	Type currency Properties Filter, Nillable, Sort Description Total of all OrderItemSummaries of type Fee belonging to this OrderSummary, including tax but not including adjustments. It is equal to TotalFeeAmount + TotalFeeTaxAmount.

Field	Details
	This field is available in API version 56.0 and later.
TotalFeeTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalFeeAmount. This field is available in API version 56.0 and later.
TotalProductAdjDistAmount	Type currency Properties Filter, Nillable, Sort Description Total of all order-level price adjustments applied to OrderItemSummaries of type code Product belonging to this OrderSummary. This value includes OrderItemAdjustmentLineSummaries that belong to OrderAdjustmentGroupSummaries of type Header.
TotalProductAdjDistAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Total of all order-level price adjustments applied to OrderItemSummaries of type code Product belonging to this OrderSummary, inclusive of tax. This value includes OrderItemAdjustmentLineSummaries that belong to OrderAdjustmentGroupSummaries of type Header. It is equal to TotalProductAdjDistAmount + TotalProductAdjDistTaxAmount. This field is available in API version 49.0 and later.
TotalProductAdjDistTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalProductAdjDistAmount.
TotalProductAmount	Type currency Properties Filter, Nillable, Sort

Field	Details
	Description Sum of the Total Line Amounts of all OrderItemSummaries of type code Product belonging to this OrderSummary, not including adjustments or tax. This field is available in API version 54.0 and later.
TotalProductAmount WithTax	Type currency Properties Filter, Nillable, Sort Description Total of all OrderItemSummaries of type code Product belonging to this OrderSummary, including tax but not including adjustments. It is equal to TotalProductAmount + TotalProductTaxAmount. This field is available in API version 54.0 and later.
TotalProductTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalProductAmount. This field is available in API version 54.0 and later.
TotalTaxAmount	Type currency Properties Filter, Nillable, Sort Description Total tax on all OrderItemSummaries belonging to this OrderSummary. Equal to TotalAdjustedDeliveryTaxAmount plus TotalAdjustedFeeTaxAmount plus TotalAdjustedProductTaxAmount.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

OrderSummaryChangeEvent (API version 62.0)

Change events are available for the object.

OrderSummaryFeed

Feed tracking is available for the object.

OrderSummaryOwnerSharingRule

Sharing rules are available for the object.

OrderSummaryShare

Sharing is available for the object.

SEE ALSO:

- [FulfillmentOrder](#)
- [Order](#)
- [OrderItemSummary](#)
- [OrderPaymentSummary](#)
- [OrderSummaryRoutingSchedule](#)
- [PendingOrderSummary](#)
- [SalesChannel](#)

OrderSummaryAdditionalInfo

Stores information related to OrderSummary including context around the order, such as inventory reservation details, order origination, and other values that Einstein uses to perform order analysis. Only reservation details can be stored in this object. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is only available in Salesforce Order Management orgs or if the B2B Commerce license is enabled.

Fields

Field	Details
AdjustmentsVersion	Type text Properties Filter, Group, Nillable, Sort Description Represents the adjustment algorithm that was used to create adjustments for this order
CurrencyIsoCode	Type picklist

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description ISO code for the currency of the OrderSummary associated with the OrderSummaryAdditionalInfo. Possible values are: • GBP—British Pound • USD—U.S. Dollar The default value is USD.
InventoryReservationExtRef	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Holds an external reference identifier for tracking the inventory reservation.
InventoryReservationIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Inventory reservation identifier for the order, if available. Since this value can come from external systems, the value type has no lookup or enforcement.
InventoryReservationMessage	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Holds any details or other relevant information that can further explain the status of the reservation.
InventoryReservationState	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The status of the reservation, if available. Possible values are: • DEFERRED

Field	Details
	• NOT_APPLICABLE • PERMANENT • TEMPORARY
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the OrderSummaryAdditionalInfo record.
OrderId	Type reference Properties Create, Filter, Group, Nillable, Sort Description Unique ID of the order associated with this record. This field is a relationship field. Relationship Name Order Relationship Type Lookup Refers To Order
OrderSummaryId	Type reference Properties Filter, Group, Nillable, Sort Description Unique ID of the associated OrderSummary to which the specific OrderSummaryAdditionalInfo applies. This field is a relationship field. Relationship Name OrderSummary Relationship Type Lookup Refers To OrderSummary

Field	Details
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who currently owns this record. Default value is the ID of the user who created the record. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[OrderSummaryAdditionalInfoFeed](#) on page 55

Feed tracking is available for the object.

[OrderSummaryAdditionalInfoOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[OrderSummaryAdditionalInfoShare](#) on page 67

Sharing is available for the object.

SEE ALSO:

[OrderSummary](#)

OrderSummaryRelationship

Junction object used to track how an original order summary (created before any exchanges have occurred) relates to other order summary objects in a chain of exchange orders. This object is available in API version 60.0 and later.

An exchange order is an OrderSummary object whose `SourceProcess` property is set to Exchange. An original order summary can have an exchange order, which in turn can have yet another exchange order, and so on. The OrderSummaryRelationship object maintains this relationship between OrderSummary objects.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is only available in Salesforce Order Management orgs or if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
AssociatedOrderSummaryId	Type reference Properties Create, Filter, Group, Sort Description ID of the associated OrderSummary. This field is a relationship field. Relationship Name AssociatedOrderSummary Relationship Type Lookup Refers To OrderSummary
AssociatedOrderSummaryStatus	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Sort Description Status of the associated OrderSummary. Possible values are: • Activated • Approved • Canceled • Created • Fulfilled • Returned • Waiting to Fulfill The default value is Created.

Field	Details
AssociatedRelationshipType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Relationship type of the associated OrderSummary. Possible values are: • Exchange
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization. Possible values are: • EUR—Euro • USD—U.S. Dollar The default value is USD.
MainAttachedToId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of an Order (Change Order) or a ReturnOrder that belongs to the parent OrderSummary (whose ID is stored in the <code>MainOrderSummaryId</code> field). This field is a polymorphic relationship field. Relationship Name MainAttachedTo Relationship Type Lookup Refers To Order, ReturnOrder
MainOrderSummaryId	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description ID of the associated OrderSummary's parent. This field is a relationship field. Relationship Name MainOrderSummary Relationship Type Lookup Refers To OrderSummary
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the OrderSummaryRelationship.
RootOrderSummaryId	Type reference Properties Create, Filter, Group, Sort Description ID of the original OrderSummary that existed before any exchange orders were created. This field is a relationship field. Relationship Name RootOrderSummary Relationship Type Lookup Refers To OrderSummary

OrderSummaryRoutingSchedule

Represents an attempt to route an order summary to one or more inventory locations for fulfillment. You can use it to schedule future attempts and to record completed attempts. This object is available in API version 51.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is only available in Salesforce Order Management orgs or if the B2B Commerce license is enabled.

Fields

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the order summary routing schedule.
OrderSummaryId	Type reference Properties Create, Filter, Group, Sort Description (Master-Detail) The order summary associated with the routing schedule.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the User who currently owns this order summary routing schedule. Default value is the User logged in to the API to perform the create.

Field	Details
Reason	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Reason for the routing attempt. You can customize this list. The list has one default value: Unknown
ScheduleStatus	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Identifies whether this routing attempt has already run or is scheduled to run. Possible values are: - ABANDONED - COMPLETED - SCHEDULED
ScheduledDatetime	Type dateTime Properties Create, Filter, Sort, Update Description Identifies when this routing attempt was run or is scheduled to run. If the <code>ScheduleStatus</code> is ABANDONED or COMPLETED, then you can't modify this value.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[OrderSummaryRoutingScheduleOwnerSharingRule](#)

Sharing rules are available for the object.

[OrderSummaryRoutingScheduleShare](#)

Sharing is available for the object.

SEE ALSO:

[OrderSummary](#)

Organization

Represents key configuration information for an organization.

Executing a SOQL SELECT query returns the value of fields in this object, but no value is visible for some of the fields.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
Address (beta)	Type address Properties Filter, Nillable Description The compound form of the address. Read-only. See Address Compound Fields for details on compound address fields.
AllowsSelfServiceLogin	Type boolean Properties Defaulted on create, Filter, Update Description Indicates whether the organization allows Self-Service login (<code>true</code>) or not (<code>false</code>).
City	Type string Properties Filter, Group, Nillable, Sort, Update Description Name of the city for the organization's address.
ComplianceBccEmail	Type email

Field	Details
	Properties Filter, Group, Nillable, Sort Description Email address for compliance blind carbon copies. Limit: 80 characters.
Country	Type string Properties Filter, Group, Nillable, Sort Description Name of the country for the organization's address. Limit: 80 characters.
CountryCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO country code for the organization's address. Enable state and country/territory picklists to use this field. For more information, see Enable and Disable State and Country/Territory Picklists in Salesforce Help.
DailyWebToCaseCount	Type int Properties Filter, Nillable Description The number of web form submissions that have been converted to cases for the day.
DailyWebToCaseLimit	Type int Properties Filter, Nillable Description The maximum number of web form submissions that can be converted to cases per day.
DailyWebToLeadCount	Type int

Field	Details
	Properties Filter, Nillable Description The number of web form submission that have been converted to leads for the day
DailyWebToLeadLimit	Type int Properties Filter, Nillable Description The maximum number of web form submissions that can be converted to leads per day.
DefaultAccountAccess	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description In API version 10.0 and later, represents the default access level for accounts, contracts, and assets. The possible values are: • None • Read • Edit • ControlledByLeadOrContact • ControlledByCampaign In versions before 10.0, DefaultAccountAndContactAccess represented this value.
DefaultAccountAndContactAccess	Type picklist Properties Filter, Nillable, Restricted picklist Description Default access level for accounts, contacts, contracts, and assets. This field is supported for backward compatibility only and is not available in API version 10.0 or later. In version 10.0 and later, use either DefaultAccountAccess or DefaultContactAccess.

Field	Details
DefaultCalendarAccess	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Default access level for calendars. The possible values are listed, followed by the user interface labels in parentheses: • HideDetails (Hide Details) • HideDetailsInsert (Hide Details and Add Events) • ShowDetails (Show Details) • ShowDetailsInsert (Show Details and Add Events) • AllowEdits (Full Access)
DefaultCampaignAccess	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Default access level for campaigns. The possible values are: • None • Read • Edit • All
DefaultCaseAccess	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Default access level for cases. The possible values are: • None • Read • Edit • ReadEditTransfer
DefaultContactAccess	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description Default access level for contacts. The possible values are: • None • Read • Edit • ControlledByParent In versions before 10.0, <code>DefaultAccountAndContactAccess</code> represented this value. When <code>DefaultContactAccess</code> is set to "Controlled by Parent," you can't update the <code>ContactAccessLevel</code> field.
<code>DefaultLeadAccess</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Default access level for leads. The possible values are: • NoneRead • Edit • ReadEditTransfer
<code>DefaultLocaleSidKey</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort, Update Description Default locale SID key. For more information on picklist options, see Supported Number, Name, and Address Formats (ICU) in Salesforce help.
<code>DefaultOpportunityAccess</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Default access level for opportunities. The possible values are: • None • Read • Edit

Field	Details
	- ControlledByLeadOrContact - ControlledByCampaign
DefaultPricebookAccess	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Default access level for price books. The possible values are listed, followed by the user interface labels in parentheses: - None (No access) - Read (Read only) - ReadSelect (Use)
DefaultTerritoryCaseAccess	Type picklist Properties Filter, Group, Nillable, Sort Description Default access level for cases associated with accounts in territories. The possible values are: - None - Read - Edit - ControlledByLeadOrContact - ControlledByCampaign
DefaultTerritoryContactAccess	Type picklist Properties Filter, Group, Nillable, Sort Description Default access level for contacts associated with accounts in territories. The possible values are: - NoneRead - Edit - ControlledByLeadOrContact - ControlledByCampaign When <code>DefaultContactAccess</code> is set to "Controlled by Parent" you can't update this field.

Field	Details
DefaultTerritoryOppAccess	Type picklist Properties Filter, Group, Nillable, Sort Description Default access level for opportunities in territories. Valid values: • NoneRead • Edit • ControlledByLeadOrContact • ControlledByCampaign
Division	Type string Properties Filter, Group, Nillable, Sort, Update Description The name of the division for this organization. This field is not related to the Division object.
Fax	Type phone Properties Filter, Group, Nillable, Sort, Update Description Fax number. Limit: 40 characters.
FiscalYearStartMonth	Type int Properties Filter, Group, Nillable, Sort Description Number that corresponds to the month that this organization's fiscal year starts.
HomepageHtml	Type textarea Properties Nillable, Update

Field	Details
	Description The Home tab custom links and company message for this organization.
InstanceName	Type string Properties Filter, Group, Nillable, Sort Description Read-only. The name of the instance. Available in API version 31.0 or later.
IsSandbox	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Read-only. Indicates whether the current organization is a sandbox (<code>true</code>) or production (<code>false</code>) instance. Available in API version 31.0 or later.
LanguageLocaleKey	Type picklist Properties Filter, Group, Restricted picklist, Sort, Update Description The same as <code>Language</code> , the two-to-five character code which represents the language and locale ISO code. This controls the language for labels displayed in an application.
LastWebToCaseDate	Type dateTime Properties Filter, Nillable Description The last date that a web form submission was converted to a case.
LastWebToLeadDate	Type dateTime Properties Filter, Nillable

Field	Details
	Description The last date that a web form submission was converted to a lead.
Latitude	Type double Properties Filter, Nillable, Sort, Update Description Used with <code>Longitude</code> to specify the precise geolocation of an address. Acceptable values are numbers between –90 and 90 up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations .
Longitude	Type double Properties Filter, Nillable, Sort, Update Description Used with <code>Latitude</code> to specify the precise geolocation of an address. Acceptable values are numbers between –180 and 180 up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations .
MaxActionsPerRule	Type int Properties Filter, Nillable Description Maximum number of actions per workflow, assignment, escalation, and auto-response rules. This field is unavailable in version 15.0 and later.
MaxRulesPerEntity	Type int Properties Filter, Nillable Description Maximum number of rules per object, inclusive of workflow, assignment, escalation, and auto-response rules. This field is unavailable in version 15.0 and later.
MonthlyPageViewsEntitlement	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The number of page views allowed for the current calendar month for the sites in your organization. To access this field, Salesforce Sites must be enabled for your organization. This field is generally available in API versions 18.0 and later.
MonthlyPageViewsUsed	Type int Properties Filter, Group, Nillable, Sort Description The number of page views used in the current calendar month for the sites in your organization. To access this field, Salesforce Sites must be enabled for your organization. This field is generally available in API versions 18.0 and later.
Name	Type string Properties Filter, Group, idLookup, Sort, Update Description The name of the organization.
NamespacePrefix	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer.

Field	Details
	In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
OrganizationType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Edition of the organization, for example Enterprise Edition or Unlimited Edition.
Phone	Type phone Properties Filter, Group, Nillable, Sort, Update Description Phone number for the organization.
PostalCode	Type string Properties Filter, Group, Nillable, Sort, Update Description Postal code for the address of the organization. Limit: 20 characters.
PreferencesEventScheduler	Type boolean Properties Update Description Indicates whether opportunities require products (<code>true</code>) or not (<code>false</code>).
PreferencesRequireOpportunityProducts	Type boolean Properties Filter, Update Description Indicates whether opportunities require products (<code>true</code>) or not (<code>false</code>).

Field	Details
PreferencesSlBrowserEnabled	Type boolean Properties Filter, Update Description Indicates whether the Salesforce mobile web is enabled for all users in your organization (<code>true</code>) or is disabled for all users (<code>false</code>). This field is available in API version 29.0 or later.
PreferencesTerminateOldestSession	Type boolean Properties Filter, Update Description Indicates whether the oldest login session is automatically closed when a policy specifying the maximum number of sessions is triggered. This field is available in API version 35.0 — 49.0. As of API version 50.0, this field is removed.
PreferencesTransactionSecurityPolicy	Type boolean Properties Filter, Update Description Indicates whether the Transaction Security feature has been enabled. This field is available in API version 35.0 — 49.0. As of API version 50.0, this field is removed.
PrimaryContact	Type string Properties Filter, Group, Nillable, Sort, Update Description Name of the primary contact for the organization. Limit: 80 characters.
ReceivesAdminInfoEmails	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Indicates whether the organization receives administrator emails (<code>true</code>) or not (<code>false</code>).
<code>ReceivesInfoEmails</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the organization receives informational email from Salesforce (<code>true</code>) or not (<code>false</code>).
<code>SelfServiceCasePlural</code>	Type string Properties Filter, Nillable, Update Description The plural version of the term used to represent the Case object in the Self-Service portal.
<code>SelfServiceCaseSingle</code>	Type string Properties Filter, Nillable, Update Description The singular version of the term used to represent the Case object in the Self-Service portal.
<code>SelfServiceCaseSubmitRecordTypeId</code>	Type reference Properties Filter, Nillable, Update Description The ID of the record type associated with a case submitted via the Self-Service portal.
<code>SelfServicDefaultCaseOrigin</code>	Type string Properties Filter, Nillable, Update Description The default origin of a case submitted via the Self-Service portal.

Field	Details
<code>SelfServiceEmailSenderAddress</code>	Type email Properties Filter, Nillable, Update Description The Self-Service email address from which new Self-Service user and password email messages are sent, such as <code>support@acme.com</code>.
<code>SelfServiceEmailSenderName</code>	Type string Properties Filter, Nillable, Update Description The name associated with the email address in the <code>SelfServiceEmailSenderAddress</code> field, such as <code>Acme Customer Support</code>.
<code>SelfServiceEmailUserOnCaseCreationTemplateId</code>	Type reference Properties Filter, Nillable, Update Description The ID of the email template used when email is sent to a Self-Service user when he or she creates a case.
<code>SelfServiceEnabledForResponseRules</code>	Type boolean Properties Filter, Nillable, Update Description Indicates whether the Self-Service portal is enabled for auto-response rules (<code>true</code>) or not (<code>false</code>).
<code>SelfServiceFeatureConfig</code>	Type int Properties Filter, Nillable, Update Description An integer representing the active Self-Service feature configuration for this organization.

Field	Details
SelfServiceLogoutUrl	Type url Properties Filter, Nillable, Update Description The Web page that displays when a Self-Service user logs out of the Self-Service portal.
SelfServiceMaxNumSuggestions	Type int Properties Filter, Nillable, Update Description The maximum number of suggested solutions allowed for a Self-Service case.
SelfServiceNewCommentCheckedByDefault	Type boolean Properties Defaulted on create, Filter, Update Description If <code>true</code>, When a customer notification is automatically sent when a new comment is added to a case.
SelfServiceNewCommentTemplateId	Type reference Properties Filter, Nillable, Update Description The ID of the email template used to send a notification to Self-Service users when a public comment is added to one of their cases.
SelfServiceNewPassTemplateId	Type reference Properties Filter, Nillable, Update Description The ID of the email template used when new passwords are generated for Self-Service users.

Field	Details
SelfServiceNewUserTemplateId	Type reference Properties Filter, Nillable, Update Description The ID of the email template used when new Self-Service users are enabled.
SelfServicePageHeight	Type int Properties Filter, Nillable, Update Description The maximum height in pixels of Self-Service pages.
SelfServicePageWidth	Type int Properties Filter, Nillable, Update Description The maximum width in pixels of Self-Service pages.
SelfServiceSelfClosedCaseStatus	Type picklist Properties Filter, Nillable, Update Description The default status for cases closed by Self-Service users.
SelfServiceSolutionCategoryAvailable	Type boolean Properties Defaulted on create, Filter, Update Description Indicates whether solution categories are available in the Self-Service portal (<code>true</code>) or not (<code>false</code>).
SelfServiceSolutionCategoryStartNodeId	Type reference Properties Filter, Nillable, Update

Field	Details
	Description The ID of the top-level category in the Self-Service portal.
SelfServiceSolutionPlural	Type string Properties Filter, Nillable, Update Description The plural version of the term used to represent the Solution object in the Self-Service portal.
SelfServiceSolutionSingle	Type string Properties Filter, Nillable, Update Description The singular version of the term used to represent the Solution object in the Self-Service portal.
SelfServiceStyleSheetUrl	Type url Properties Filter, Nillable, Update Description The public URL of your organization's Self-Service portal stylesheet.
SelfServiceWelcomePageConfig	Type int Properties Filter, Nillable, Update Description Integer that represents the welcome page configuration for the Self-Service portal.
SelfServiceWelcomeText	Type string Properties Filter, Nillable, Update Description The custom welcome message displayed at the top of the Self-Service home page when Self-Service users log in. Limit: 32,000 characters.

Field	Details
SignupCountryIsoCode	Type string Properties Filter, Group, Nillable, Sort Description The ISO country code specified by the user for a sign-up request.
State	Type string Properties Filter, Group, Nillable, Sort, Update Description State of the address of the organization. Limit: 80 characters.
StateCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO state code for the organization's address.
Street	Type textarea Properties Filter, Group, Nillable, Sort, Update Description Street address for the organization. Limit: 255 characters.
TrialExpirationDate	Type dateTime Properties Filter, Nillable, Sort Description The date that this organization's trial license expires.
TimeZoneSidKey	Type picklist Properties Filter, Group, Restricted picklist, Sort, Update Description Identifies the default time zone of the organization.

Field	Details
UiSkin	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The user interface theme selected for the organization.
UsesStartDateAsFiscalYearName	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the calendar year when the fiscal year begins is referred to as the year of the company's fiscal year (<code>true</code>) or not (<code>false</code>). For example, if the fiscal year begins in February 2006, a <code>true</code> value means the fiscal year is FY2006, and a <code>false</code> value means the fiscal year is FY2007.
UsesWebToCase	Type boolean Properties Filter, Nillable, Update Description Indicates whether this organization can use Web-to-Case (<code>true</code>) or not (<code>false</code>).
UsesWebToLead	Type boolean Properties Filter, Nillable, Update Description Indicates whether this organization can use Web-to-Lead (<code>true</code>) or not (<code>false</code>).
WebToCaseAssignedEmailTemplateId	Type reference Properties Filter, Nillable, Update Description The ID of the email template used when a new case is assigned to a user via Web-to-Case.

Field	Details
WebToCaseCreatedEmailTemplateId	Type reference Properties Filter, Nillable, Update Description The ID of the email template used when a new case is created via Web-to-Case.
WebToCaseDefaultCreatorId	Type reference Properties Filter, Nillable, Update Description The ID of the user specified as the default creator of cases created via Web-to-Case.
WebToCaseDefaultOrigin	Type string Properties Filter, Group, Nillable, Sort, Update Description The default value for the Case Origin field on cases submitted via Web-to-Case. Limit: 40 characters.

Usage

Query this object to obtain information about an organization's settings. Only one organization object exists per organization.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

OrgDeleteRequest

Represents a request to delete a developer edition (DE) org. This object is available in API version 42.0 and later. It is available only in Developer and Database.com editions.

Supported Calls

`create()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field Name	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The auto-generated ID of this OrgDeleteRequest object.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort Description The ID of the user who initiated the org delete request.
RequestType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Specifies whether you want to deactivate or reactivate the org. When you deactivate an org, you have 30 days to change your mind and reactivate it. After 30 days, the org is locked, and you must contact Salesforce Customer Support to reactivate it. After 60 days, the org is permanently deleted from Salesforce servers. Valid values: • Deactivate • Reactivate

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[OrgDeleteRequestOwnerSharingRule](#)

Sharing rules are available for the object.

[OrgDeleteRequestShare](#)

Sharing is available for the object.

OrgEmailAddressSecurity

Defines the assignment of a user profile to an org-wide email address. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Only authenticated users with the View Setup and Configuration permission can access this object.

Fields

Field	Details
OrgWideEmailAddressId	Type reference Properties Create, Filter, Group, Sort Description The ID of an organization-wide email address. This field is a relationship field. Relationship Name OrgWideEmailAddress Relationship Type Lookup Refers To OrgWideEmailAddress
ParentId	Type reference Properties Create, Filter, Group, Sort Description The profile ID that's allowed to use an organization-wide email address. This field is a relationship field. Relationship Name Parent Relationship Type Lookup

Field	Details
	Refers To Profile

Usage

You can use this object with `OrgWideEmailAddress` and `Profile` objects to retrieve user profiles that have access to a specific org-wide email address. To find specific users, use the `ProfileId` field on the `User` object.

You can also retrieve the org-wide email addresses that a specific user can access. Note that any users assigned to those org-wide email addresses via permission set aren't returned.

OrgMetric

Represents a feature or metric that Salesforce Optimizer evaluates. This object is available in API version 47.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is only available in orgs where Salesforce Optimizer is enabled. Requires the Modify All Data and Customize Application user permissions.

Fields

Field	Details
Category	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort Description The category of the feature evaluated. Possible values are: • Custom Code • Custom Layouts • Fields • Improve Org Security • Improve User Experience

Field	Details
	• Increase User Adoption • Object Limits • Org Limits • Reports And Dashboards • Usage • User Management • Workflow The default value is Org Limits.
FeatureType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort Description The feature evaluated. For a full list, see Features Evaluated in Salesforce Optimizer. The default value is Unassigned Page Layouts.
LatestOrgMetricScanSummaryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The feature's OrgMetricScanSummaryID from the most recent Optimizer evaluation. This field is a relationship field. Relationship Name LatestOrgMetricScanSummary Refers To OrgMetricScanSummary on page 3913
Name	Type string Properties Filter, Group, idLookup, Sort Description A unique number that identifies the feature.

SEE ALSO:

[Salesforce Help: Improve Your Implementation with Salesforce Optimizer](#)

OrgMetricScanResult

Represents data or an item associated with a feature's results in a Salesforce Optimizer evaluation. For example, for the Custom Field Limit feature, an OrgMetricScanResult object represents an object flagged for approaching the custom field limit. This object is available in API version 47.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `upsert()`

Special Access Rules

This object is only available in orgs where Salesforce Optimizer is enabled. Requires the Modify All Data and Customize Application user permissions.

Fields

Field	Details
Date	Type dateTime Properties Create, Filter, Nillable, Sort Description The date associated with an item in a feature's Optimizer evaluation. Example For the Unsupported Browsers feature, <code>Date</code> indicates the date that the user last logged in with an unsupported browser.
Flags	Type int Properties Create, Filter, Group, Nillable, Sort Description The flags associated with an item in a feature's Optimizer evaluation. Example For the API Versions feature, <code>Flags</code> indicates the API version of an object that Optimizer evaluates as outdated.
ItemStatus	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort

Field	Details
	Description The recommended action for an item in a feature's Optimizer evaluation. Possible values are: • Action Required • Immediate Action Required • No Action Required • Not Currently Enabled • Review Required • Unable to Analyze The default value is No Action Required.
Name	Type string Properties Create, Filter, Group, idLookup, Sort Description The name of the item in a feature's Optimizer evaluation, such as an object name. Example For the Unassigned Roles feature, Name refers to the name of the unassigned role.
Object	Type string Properties Create, Filter, Group, Nillable, Sort Description The object ID associated with the item in a feature's Optimizer evaluation. For the Release Update feature only, Object indicates the release that the update is scheduled for. Example For the Unused Reports feature, Object refers to the ID of the unused report.
OrgMetricScanSummaryId	Type reference Properties Create, Filter, Group, Sort Description The feature's OrgMetricScanSummary ID from the most recent Optimizer run. This field is a relationship field. Relationship Name OrgMetricScanSummary

Field	Details
	Relationship Type Master-detail Refers To OrgMetricScanSummary on page 3913 (the master object)
Profile	Type int Properties Create, Filter, Group, Nillable, Sort Description The profile ID associated with the item in a feature's Optimizer evaluation.
Quantity	Type int Properties Create, Filter, Group, Nillable, Sort Description A quantity associated with the item in a feature's Optimizer evaluation. Example For the Custom Field Limits feature, <code>Quantity</code> indicates the total number of fields on an object that approaches the custom field limit.
Type	Type string Properties Create, Filter, Group, Nillable, Sort Description The type of item or data in a feature's Optimizer evaluation. Example For the Unsupported Browsers feature, <code>Type</code> indicates the unsupported browser and platform used.
Url	Type url Properties Create, Filter, Group, Nillable, Sort Description The URL associated with the item in a feature's Optimizer evaluation. Example For the Unassigned Page Layouts feature, the <code>URL</code> represents a link to the unassigned layout.

Field	Details
User	Type string Properties Create, Filter, Group, Nillable, Sort Description The user ID or username associated with the item in a feature's Optimizer evaluation. For the Release Update feature only, <code>User</code> indicates the name of the release update that requires review. Example For the User Logins feature, <code>User</code> indicates the username of a user who hasn't recently logged in.

SEE ALSO:

[Salesforce Help: Improve Your Implementation with Salesforce Optimizer](#)

OrgMetricScanSummary

Represents the results summary for a specific feature in a Salesforce Optimizer evaluation. This object is available in API version 47.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `upsert()`

Special Access Rules

This object is only available in orgs where Salesforce Optimizer is enabled. Requires the Modify All Data and Customize Application user permissions.

Fields

Field	Details
ErrorMessage	Type picklist Properties Create, Filter, Group, Nillable, Sort Description The message returned if an error occurred during the most recent Optimizer evaluation.

Field	Details
FeatureLimit	Type int Properties Create, Filter, Group, Nillable, Sort Description The numerical limit of a feature. Example For the Custom Field Limits feature, <code>FeatureLimit</code> is 500 for Developer Edition orgs.
ImplementationEffort	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort Description The estimated time needed to complete the recommended actions for the feature. Possible values are: • 1 - 2 hours • 30 - 60 minutes • < 30 minutes • > 2 hours The default value is 30 minutes.
ItemCount	Type int Properties Create, Filter, Group, Nillable, Sort Description The number of issues found for the feature. Corresponds to the number of <code>OrgMetricScanResult</code> objects generated for the feature in an Optimizer evaluation.
Name	Type string Properties Filter, Group, idLookup, Sort Description A number that identifies the feature's results summary.
OrgMetricId	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description The OrgMetric ID that represents the feature analyzed in the Optimizer evaluation. This field is a relationship field. Relationship Name OrgMetric Relationship Type Master-detail Refers To OrgMetric on page 3908 (the master object)
PercentUsage	Type percent Properties Create, Filter, Nillable, Sort Description A percentage associated with a feature. Example For the Incomplete Chatter Profiles feature, the <code>PercentUsage</code> value is 100 if 100% of users have complete Chatter profiles.
ScanDate	Type dateTime Properties Create, Filter, Nillable, Sort Description The time that the report for the Optimizer evaluation was generated.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort Description The recommended action for the feature. Possible values are: • Action Required • Immediate Action Required • No Action Required • Not Currently Enabled • Review Required • Unable to Analyze

Field	Details
	The default value is <code>No Action Required</code> .
<code>Unit</code>	Type string Properties Create, Filter, Group, Nillable, Sort Description The unit of measurement used in the feature's results summary. Example For the Data Storage feature, the <code>Unit</code> is MB.

SEE ALSO:

[Salesforce Help: Improve Your Implementation with Salesforce Optimizer](#)

OrgSnapshot

Represents a snapshot of a scratch org. Snapshots capture the state of a scratch org so that you can use it to quickly spin up new scratch orgs using its configuration. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

A snapshot must belong to the Dev Hub org that you're using to create the scratch org. You must enable the scratch org snapshot feature in your Dev Hub org using Setup.

Fields

Field	Details
<code>Content</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Reserved for future use.

Field	Details
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort Description A free-form text field (maximum 255 characters) for you to enter a description of this scratch org snapshot.
Error	Type string Properties Filter, Group, Nillable, Sort Description Reserved for future use.
ExpirationDate	Type date Properties Filter, Group, Nillable, Sort Description Date when the scratch org snapshot expires.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, and <code>LastReferenceDate</code> isn't null, the user accessed this record or list view indirectly.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description The ID of the user who owns the scratch org snapshot. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
Provider	Type picklist Properties Filter, Group, Restricted picklist, Sort Description For internal use only.
ProviderSnapshot	Type string Properties Filter, Group, Nillable, Sort Description For internal use only.
ProviderSnapshotVersion	Type string Properties Filter, Group, Sort Description For internal use only.
SnapshotName	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the scratch org snapshot. This field value is unique within your org.
SourceOrg	Type string

Field	Details
	Properties Create, Filter, Group, Sort Description The org ID of the scratch org that the snapshot was created from.
Status	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Status of the snapshot. Possible values are: • Active—The snapshot is created and can be used to create scratch orgs. • Error—The snapshot couldn't be created. • Expired—The snapshot has expired. • In Progress—The snapshot is in the process of being created. • New—The snapshot creation request has been received. The default value is New .

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[OrgSnapshotFeed](#) on page 55

Feed tracking is available for the object.

[OrgSnapshotHistory](#) on page 63

History is available for tracked fields of the object.

[OrgSnapshotShare](#) on page 67

Sharing is available for the object.

OrgWideEmailAddress

Represents an organization-wide email address for user profiles.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Only authenticated users with the View Setup and Configuration permission can access this object.

Fields

Field	Details
Address	Type email Properties Create, Filter, Sort, Update Description An email alias that can be used by users of your org.
DisplayName	Type string Properties Create, Filter, Sort, Update Description The name used to identify the sender of the email.
IsAllowAllProfiles	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If <code>true</code>, any user profile in your organization can use this object. If <code>false</code>, only specified user profiles can use this object when sending email. If you do not have the appropriate user profile, you can't use this object. The default value is <code>false</code>.
IsVerified	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the email address has been verified by its owner. The default value is <code>false</code>. This field is available in API version 58.0 and later. Purpose Picklist Possible values are <code>DefaultNoreply</code>, <code>UserSelection</code>, <code>UserSelectionAndDefaultNoReply</code>

Field	Details
Purpose	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Indicates how an email address can be used. <code>UserSelection</code> allows users with the correct profile to select the address as the From address for an email. Possible values are <code>DefaultNoreply</code>, <code>UserSelection</code>, <code>UserSelectionAndDefaultNoReply</code>.

Usage

This object represents an email alias to use as the From address for an email, which can be selected by users with a user profile. You can pass in the `OrgWideEmailAddress` ID when calling `sendEmail()` for a `SingleEmailMessage`.

OSAsyncChgCompletedEvent

An event that allows the processing of the credit memo, invoices, and other entities after a bulk action has successfully completed. The event provides all of the values that would exist on the synchronous APIs. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `describeSObjects()`

Special Access Rules

This object is only available in Salesforce Order Management orgs.

Fields

Field	Details
ActionType	Type string Properties Create, Nillable Description The type of the action that gets applied to Order Summary Possible values are: • <code>CANCEL_ALL</code>

Field	Details
	RETURN_ALL
AsyncOperationLogId	Type reference Properties Create, Nillable Description The ID of the AsyncOperationLog. This field is a relationship field. Relationship Name AsyncOperationLog Refers To AsyncOperationLog
CurrencyIsoCode	Type string Properties Create, Nillable Description The ISO code for the currency of the OrderSummary that's associated with the FulfillmentOrder. This field is available only for orgs with multicurrencies enabled. Possible values are: - CNY—Chinese Yuan - GBP—British Pound - USD—U.S. Dollar The default value is USD.
EventUuid	Type string Properties Nillable Description Uniquely identifies an event message. The ID used to match the events that are returned in the callback result with the events in the publish call.
FeeChangeOrderId	Type reference Properties Create, Nillable Description The change order for the fee ID. This order usually used for invoices.

Field	Details
	This field is a relationship field. Relationship Name FeeChangeOrder Refers To Order
GrandTotalAmount	Type double Properties Create, Nillable Description The new order summary's grand total. This amount is equal to TotalAmount + TotalTaxAmount.
InFulfillmentChangeOrderId	Type reference Properties Create, Nillable Description The change order for any items during fulfillment. This field is a relationship field. Relationship Name InFulfillmentChangeOrder Refers To Order
OrderSummaryId	Type reference Properties Create, Nillable Description The foreign key for the master Order Summary entity. This field is a relationship field. Relationship Name OrderSummary Refers To OrderSummary
PostFulfillmentChangeOrderId	Type reference

Field	Details
	Properties Create, Nillable Description The change order for any items post-fulfillment. This ID is used for credit memos refunds This field is a relationship field. Relationship Name PostFulfillmentChangeOrder Refers To Order
PreFulfillmentChangeOrderId	Type reference Properties Create, Nillable Description The change order for any items that haven't been fulfilled. This field is a relationship field. Relationship Name PreFulfillmentChangeOrder Refers To Order
TotalAdjDistAmount	Type double Properties Create, Nillable Description The total distributed adjustment amount without taxes.
TotalAdjDistTaxAmount	Type double Properties Create, Nillable Description The total distributed adjustment taxes.
TotalAdjustedDeliveryAmount	Type double Properties Create, Nillable

Field	Details
	Description The total delivery adjusted amount without taxes.
TotalAdjustedDeliveryTaxAmount	Type double Properties Create, Nillable Description The total delivery adjusted tax amount .
TotalAdjustedProductAmount	Type double Properties Create, Nillable Description The total adjusted product amount without tax.
TotalAdjustedProductTaxAmount	Type double Properties Create, Nillable Description The total adjusted product tax amount. This amount is equal to TotalAdjustmentAmount + TotalAdjustmentTaxAmount.
TotalAmount	Type double Properties Create, Nillable Description The total amount, not including taxes.
TotalExcessFundsAmount	Type double Properties Create, Nillable Description The amount used to determine if a refund is needed pre-fulfillment.
TotalFeeAmount	Type double

Field	Details
	Properties Create, Nillable Description Total fee amount, not including taxes.
TotalFeeTaxAmount	Type double Properties Create, Nillable Description The total fee tax amount.
TotalRefundableAmount	Type double Properties Create, Nillable Description The amount that can be refunded to the client.
TotalRequiredFundsAmount	Type double Properties Create, Nillable Description The total amount of required funds.
TotalTaxAmount	Type double Properties Create, Nillable Description The combined total of all taxes.

OutOfOffice

Represents a user-set value on a profile that shows when the user intends to be out of the office. This object is available in API version 41.0 and later.

Supported Calls

`create()`, `delete()`, `query()`, `undelete()`, `upsert()`, `update()`

Special Access Rules

In Lightning Experience, lets users set a message next to their name in Chatter to show when they plan to be out of the office. The message appears in Lightning Experience, Salesforce Classic, and mobile views. Messages expire automatically after their end date. You can control whether out-of-office functionality is available to your users. Set it up in the Out of Office section in **Setup > Chatter Settings**.

Only internal users can set an out-of-office message.

Fields

Field Name	Details
EndDate	Type dateTime Properties Create, Filter, Sort, Update Description The date of the last day a person is out of the office. After the message expires, it goes away automatically.
IsEnabled	Type boolean Properties Create, Defaulted on create Description Indicates whether an out-of-office message can be displayed for a user. The default value is <code>true</code> .
Message	Type string Properties Create, Filter, Group, Sort, Update Description The message portion of the out-of-office message. This text, along with start and end dates, is appended to the user's name in the Salesforce user interface. The maximum length of this string is 40 characters.
StartDate	Type dateTime Properties Create, Filter, Sort, Update Description The date of the first day a person is out of the office.

Field Name	Details
UserId	Type reference Properties Create, Filter, Group, Sort Description The ID of the user associated with the out-of-office message.

Usage

- Maximum message length is 60 characters.
- Users can set only their own out-of-office message. An admin can set an out-of-office message for any user.
- The out-of-office message can be set only for internal users.

OutgoingEmail

For internal use only.

OutgoingEmailRelation

For internal use only.

OwnedContentDocument

Represents a file owned by a user. This object is available in version 30.0 and later.

Supported Calls

`describeSObjects()`

Fields

Field Name	Details
ContentDocumentId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the document.

Field Name	Details
	This is a relationship field. Relationship Name ContentDocument Relationship Type Lookup Refers To ContentDocument
ContentSize	Type int Properties Filter, Group, Nillable, Sort Description The size of the document in bytes for documents smaller than 2 GB. In API version 66.0 and later, we recommend that you use the <code>ContentSizeLong</code> field even for documents smaller than 2 GB.
ContentSizeLong	Type long Properties Filter, Group, Nillable, Sort Description The size of the document in bytes up to 10 GB. This field is available in API version 66.0 and later.
ContentUrl	Type url Properties Filter, Group, Nillable, Sort Description URL for links and Google Docs. This field is set only for links and Google Docs, and is one of the fields that determine the <code>FileType</code>. This field is available in API version 31.0 and later.
ExternalDataSourceName	Type string Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description The name of the external data source in which the document is stored. This field is set only for external documents that are connected to Salesforce. This field is available in API version 32.0 and later.
ExternalDataSourceType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Type of external data source in which the document is stored. This field is set only for external documents that are connected to Salesforce. This field is available in API version 35.0 and later.
FileExtension	Type string Properties Filter, Group, Nillable, Sort Description File extension of the document. This field is available in API version 31.0 and later.
FileType	Type string Properties Filter, Group, Nillable, Sort Description Type of document, which is determined by the file extension.
OwnerId	Type reference Properties Filter, Group, Sort Description ID of the owner of the document. This is a relationship field. Relationship Name Owner Relationship Type Lookup

Field Name	Details
	Refers To User
Title	Type string Properties Filter, Group, idLookup, Sort Description Title of the document.

OwnerChangeOptionInfo

Represents default and optional actions that can be performed when a record's owner is changed. Available in API version 35.0 and later, but to query for change owner metadata, use the OwnerChangeOptionInfo object in Tooling API instead. For more information, see [OwnerChangeOptionInfo](#) in the Tooling API.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Use `EntityId` or `DurableId` when querying this object.

PackageInstallEventLog

PackageInstallEventLog stores details about package installation in the organization. This object is available in API version 62.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
ClientId	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
CpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
ErrorType	Type string Properties Filter, Group, Nillable, Sort Description A general categorization of any error that's encountered.
IsManaged	Type boolean Properties Defaulted on create, Filter, Group, Sort Description True if the operation is performed on a managed package. The default value is <code>false</code>.
IsPush	Type boolean Properties Defaulted on create, Filter, Group, Sort Description True if the package was installed as a result of a push upgrade. The default value is <code>false</code>.
IsReleased	Type boolean

Field	Details
	Properties Defaulted on create, Filter, Group, Sort Description True if the operation is performed on a released package. The default value is <code>false</code>.
IsSuccessful	Type boolean Properties Defaulted on create, Filter, Group, Sort Description True if the package was successfully installed. The default value is <code>false</code>.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: <code>GeJCsym5eyvtEK2I</code>.
OperationType	Type string Properties Filter, Group, Nillable, Sort Description The type of package operation. Possible Values • INSTALL • UPGRADE • EXPORT • UNINSTALL • VALIDATE_PACKAGE • INIT_EXPORT_PKG_CONTROLLER
PackageName	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The name of the package that's being installed.
RequestIdIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>REQUEST_ID</code>. For example: 3nWgxWbDKWWDIk0FKfF5DV.
RunTime	Type double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
Uri	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: <code>/home/home.jsp</code> .
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 18-character ID of the user who's using Salesforce services through the UI or the API. For example: <code>00530000009M943YAS</code>

PackageLicense

Represents a license for an installed managed package. This object is available in API version 31.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field Name	Details
AllowedLicenses	Type int Properties Filter, Group, Sort Description The number of users allowed to use the package.
ExpirationDate	Type dateTime

Field Name	Details
	Properties Filter, Nillable, Sort Description The date and time when the package license expires.
IsAvailableForIntegrations	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Reserved for future use.
IsProvisioned	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Reserved for internal use.
NamespacePrefix	Type string Properties Filter, Group, Sort Description The namespace prefix associated with the package.
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The status of the license. Possible values are: Active, Expired, Free, and Trial.
UsedLicenses	Type int Properties Filter, Group, Sort Description The number of users who have a license to the package.

Usage

Use this object to determine the number of licenses allowed and in use for a managed package installed in your organization.

The following example demonstrates the use of the API to manage licenses for a package. The example defines an Apex class that does the following.

- Retrieves the PackageLicense record for the specified package (identified by its namespace prefix).
- Defines a function that returns a list of all users with the specified profile.
- Creates a UserPackageLicense record for each user with that profile, which has the effect of assigning a license for the package to all users with that profile.
- Returns an error message if the number of users exceeds the number of available licenses.

```
public class AssignPackageLicense {

    static String PACKAGE_NAMESPACE_PREFIX = 'acme_101';
    static String PROFILE_ID = '00exx000000jz1SAAQ';
    public static String exceptionText {get; set;}

    public AssignPackageLicense() {
        exceptionText = 'Initialized';
    }

    static List<User> getUsersWithProfile(){
        String userQuery = 'SELECT Id FROM User WHERE ProfileId = :PROFILE_ID';
        List<User> matchingUsers = new List<User>();
        matchingUsers = [SELECT Id FROM User WHERE ProfileId = :PROFILE_ID];
        return matchingUsers;
    }

    public static void assignLicenseByProfile() {
        //find the PackageLicense Id
        PackageLicense pl = [SELECT Id, NamespacePrefix, AllowedLicenses, UsedLicenses,
            ExpirationDate, Status FROM PackageLicense WHERE
            NamespacePrefix = :PACKAGE_NAMESPACE_PREFIX];
        System.assert(pl != null, 'PackageLicense cannot be null.');
```

List<User> usersToAssignLicenses = getUsersWithProfile();

List<UserPackageLicense> firstUPLs = new List<UserPackageLicense>();

//create a new UserPackageLicense record for each user with the specified profile

```
for (Integer i = 0; i < usersToAssignLicenses.size(); i++){
    UserPackageLicense upl = new UserPackageLicense();
    upl.PackageLicenseId = pl.Id;
    upl.UserId = usersToAssignLicenses[i].Id;
    firstUPLs.add(upl);
}

try {
    //bulk insert
    insert(firstUPLs);
} catch(DmlException e) {
    for (Integer i = 0; i < e.getNumDml(); i++) {
        // process exception here
    }
}
```

```
System.debug(e.getDmlMessage(i));
String status = e.getDmlStatusCode(i);
System.debug(status + ' ' + e.getDmlMessage(i));
if(status.equals('LICENSE_LIMIT_EXCEEDED')){
    exceptionText = 'You tried to assign more licenses than available. '
    + ' You tried to create ' + firstUPLs.size()+' licenses but only have '
    + (pl.AllowedLicenses - pl.UsedLicenses) + ' licenses free.';
    System.debug(exceptionText);
}
}
}
}
```

PackagePushError

Represents an error encountered during a push request. The number of PackagePushError records created depends on the number of push jobs in the request that result in an error.

Supported Calls

describeSObjects(), query(), retrieve()

Special Access Rules

To initiate a push upgrade for a first-generation managed package, the Upload AppExchange Packages user permission is required.

To initiate a push upgrade for an unlocked or second-generation managed package, the Create and Update Second-Generation Packages user permission is required.

The push upgrade feature is only available to first- and second-generation managed packages that have passed AppExchange security review. To enable push upgrades for your managed package, log a support case in the [Salesforce Partner Community](#).

For unlocked packages, push upgrades are enabled by default.

Fields

Field Name	Details
ErrorDetails	Type string Properties Nillable, Sort Description Explanation of the error.
ErrorMessage	Type string

Field Name	Details
	Properties Nillable, Sort Description The error code that appears in the API.
ErrorSeverity	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Valid values are: - Error - Warning
ErrorTitle	Type string Properties Nillable, Sort Description The error message title that appears in the API.
ErrorType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Valid values are: - ApexTestFailure - DeployError - FeatureMissing - IneligibleUpgrade - LimitExceeded - LockingFailure - PACError - UnclassifiedError
PackagePushJobId	Type reference Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description Required. The parent push job record ID.

Usage

Suppose that your push upgrade request wasn't successful due to some of its jobs failing. Let's write some code to find out what those errors were.

This code sample uses the Web Services Connector (WSC).

```
// Retrieves all PackagePushError objects associated with the PackagePushJob with the given
// ID
final String PACKAGE_PUSH_ERROR_QUERY = "Select ErrorMessage, ErrorDetails, ErrorTitle,"
+ " ErrorSeverity, ErrorType from PackagePushError where PackagePushJobId = '%s'";

// job is a PackagePushJob instance
QueryResult queryResult = conn.query(String.format(PACKAGE_PUSH_ERROR_QUERY, job.getId()));

StringBuilder errorMessages = new StringBuilder();
errorMessages.append("Errors for PackagePushJob [").append(job.getId()).append("]:")
.append("\n");

// There can be multiple PackagePushErrors for a given PackagePushJob
for(SObject r : queryResult.getRecords()) {
    PackagePushError e = (PackagePushError) r;
    errorMessages.append("Title: ").append(e.getErrorTitle()).append("\n");
    errorMessages.append("Severity: ").append(e.getErrorSeverity()).append("\n");
    errorMessages.append("Type: ").append(e.getErrorType()).append("\n");
    errorMessages.append("Message: ").append(e.getErrorMessage()).append("\n");
    errorMessages.append("Details: ").append(e.getErrorDetails()).append("\n");
    errorMessages.append("\n");
}

String errors = errorMessages.toString();
```

PackagePushJob

Represents an individual push job for upgrading a package in an org from one version to another version. There can be multiple push jobs created for one push request. For example, if you want to upgrade five orgs as part of one push, you have one PackagePushRequest record and five PackagePushJob records.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To initiate a push upgrade for a first-generation managed package, the Upload AppExchange Packages user permission is required.

To initiate a push upgrade for an unlocked or second-generation managed package, the Create and Update Second-Generation Packages user permission is required.

The push upgrade feature is only available to first- and second-generation managed packages that have passed AppExchange security review. To enable push upgrades for your managed package, log a support case in the [Salesforce Partner Community](#).

For unlocked packages, push upgrades are enabled by default.

Fields

Field Name	Details
DurationSeconds	Type int Properties Group, Nillable Description The length of time in seconds, that the push upgrade took to complete. This field is new in API version 51.0.
EndTime	Type dateTime Properties Create, Nillable, Update Description The date and time (UTC) at which the push upgrade ended, in ISO 8601 format. This field is new in API version 51.0.
PackagePushRequestId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Required. The ID of the parent push request record that must have been created.
StartTime	Type dateTime Properties Create, Nillable, Update Description The date and time (UTC) at which the push upgrade started, in ISO 8601 format. This field is new in API version 51.0.

Field Name	Details
Status	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The status of the job. Valid values are: • Canceled • Created (default) • Failed • In Progress • Pending • Succeeded Don't specify this value when you create the push job. The default value of Created is used.
SubscriberOrganizationKey	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Required. The organization key of the org where the package is upgraded. This references orgKey in PackageSubscriber.

Usage

Suppose that you want to push version 3.4.6 of your package to all orgs. You've already identified the orgs eligible for the upgrade by using MetadataPackageVersion and created the push request using PackagePushRequest. Now let's write some code to create a push job for each eligible org.

This code sample uses the Web Services Connector (WSC).

```
PackageSubscriber[] subscribers = new PackageSubscriber[];

// ... populate eligible and desired subscribers

// Create the PackagePushJob array
PackagePushJob[] jobs = new PackagePushJob[subscribers.length];

for (int i = 0; i < subscribers.length; i++) {
    // create a job for each subscriber...
    PackagePushJob job = new PackagePushJob();
    // ... associate it to the PackagePushRequest ppr...
    job.setPackagePushRequestId(ppr.getId());
    // ... and add the orgKey
```

```

    job.setSubscriberOrganizationKey(subscribers[i].getOrgKey());
    jobs[i] = job;
}

// Save the jobs
SaveResult[] saveResults = conn.create(jobs);

// Add the newly generated id's to the PackagePushJob objects
for (int i = 0; i < saveResults.length; i++) {
    if (saveResults[i].isSuccess()) {
        jobs[i].setId(saveResults[i].getId());
    }
}
}

```

Or, if you're using REST API, submit a POST request to the PackagePushJob sObject endpoint, as in the following example. SOAP API is also supported. This example returns the push job ID (starting with 0DX) that is required to query the status of the job.

```

POST
/services/data/v38.0/objects/packagepushjob/
{
  "PackagePushRequestId" : "0DV...",
  "SubscriberOrganizationKey" : "00DR00..."
}

```

Checking the Status of a Push Job

To check the job status, simply query the Status field. For example:

```
SELECT Id, Status FROM PackagePushJob WHERE PackagePushRequestId ='0DV...'
```

Here's an example in Java.

```

// Finds the status of the PackagePushJob with the given id
String PACKAGE_PUSH_JOB_STATUS_QUERY = "Select status from PackagePushJob where Id = '%s'";

// job is a PackagePushJob instance
QueryResult queryResult = conn.query(String.format(PACKAGE_PUSH_JOB_STATUS_QUERY,
job.getId()));

// extract the status from the QueryResult
String status = ((PackagePushJob) queryResult.getRecords()[0]).getStatus();

// optionally, update the PackagePushJob instance with the latest status
job.setStatus(status);

```

You can also continuously poll the job status until the job is done. The following Java example polls the status every 10 seconds.

```

// The set of states that indicate a PackagePushJob has completed
final Set<String> TERMINAL_STATES = new HashSet<>();
TERMINAL_STATES.add("Succeeded");
TERMINAL_STATES.add("Failed");
TERMINAL_STATES.add("Canceled");

String status = queryJobStatus(job); // this method returns the status as retrieved in the
previous code sample

// If the status is not one of the completed statuses...

```

```
while(!TERMINAL_STATES.contains(status)) {  
    Thread.sleep(10 * 1000); // ... wait 10 seconds and try again  
    status = queryJobStatus(job);  
}
```

PackagePushRequest

Represents the push request for upgrading a package in one or many orgs from one version to another version.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To initiate a push upgrade for a first-generation managed package, the Upload AppExchange Packages user permission is required.

To initiate a push upgrade for an unlocked or second-generation managed package, the Create and Update Second-Generation Packages user permission is required.

The push upgrade feature is only available to first- and second-generation managed packages that have passed AppExchange security review, and unlocked packages. To enable push upgrades for your managed package, log a support case in the [Salesforce Partner Community](#).

For unlocked packages, push upgrades are enabled by default.

Fields

Field Name	Details
DurationSeconds	Type int Properties Group, Nillable Description The length of time in seconds, that the push upgrade took to complete. This field is new in API version 51.0.
EndTime	Type dateTime Properties Create, Nillable, Update Description The date and time (UTC) at which the push upgrade ended, in ISO 8601 format. This field is new in API version 51.0.

Field Name	Details
PackageVersionId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Required. The non-beta, non-deprecated package version that the package is being upgraded to.
ScheduledStartTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time (UTC) at which the push request is processed, in ISO 8601 format. Set this value to the earliest time that you want Salesforce to attempt to start the push. As a best practice, schedule pushes at off-peak hours like 1:00 AM Saturday. If you don't specify a value, the push starts when the package push request's Status is set to <code>Pending</code>.  Note: Scheduled push upgrades begin as soon as resources are available on the Salesforce instance, which is either at or after the start time you specify. In certain scenarios, the push upgrade could start a few hours after the scheduled start time.
StartTime	Type dateTime Properties Create, Nillable, Update Description The date and time (UTC) at which the push upgrade actually started, in ISO 8601 format. This field is new in API version 51.0.
Status	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The status of the push. Valid values are: • Canceled • Created (default) • Failed • In Progress • Pending

Field Name	Details
	• Succeeded Don't specify this value when you create the push request. The default value of Created is used. Later, change the status to Pending to schedule the push upgrade.

Usage

Suppose that you want to push version 3.4.6 of your package to all orgs. You've already identified the orgs eligible for the upgrade by using `MetadataPackageVersion`. Now let's write some code to create a push request, which holds a push job for each eligible org.

This code sample uses the Web Services Connector (WSC).

```
// Create a new PackagePushRequest for the versionId to upgrade to
// (for example, versionId is the "04t..." id of version
// 3.4.6 of the package
PackagePushRequest ppr = new PackagePushRequest();
ppr.setPackageVersionId(versionId);

// Optionally, set the start time of the PackagePushRequest to schedule it to begin
// automatically; scheduledStartTime is a java.util.Calendar instance
ppr.setScheduledStartTime(scheduledStartTime);

// Save the PackagePushRequest
SaveResult[] saveResults = conn.create(new SObject[] { ppr });
if (saveResults[0].isSuccess()) {
    // Add the newly generated Id to the object
    ppr.setId(saveResults[0].getId());
} else {
    for (Error error : saveResults[0].getErrors()) {
        System.out.println(error.getMessage());
    }
}
```

Or, if you're using REST API, submit a POST request to the `PackagePushRequest sObject` endpoint, as in the following example. SOAP API is also supported.

This example returns the push request ID (starting with ODV) that's required to create push jobs.

```
POST
/services/data/v38.0/objects/packagepushrequest/
{
  "PackageVersionId" : "04t...",
  "ScheduledStartTime" : "2016-08-24T21:00:00"
}
```

As your next step, create a push job for each eligible subscriber you want to upgrade using `PackagePushJob`.

Scheduling the Push Upgrade

To signal that the push upgrade is ready to be processed, change the status of the push request to Pending. If you didn't set a `ScheduledStartTime`, the push upgrade starts immediately after you change the status.

See the following Java example.

```
// ppr is the PackagePushRequest instance
ppr.setStatus("Pending");
conn.update(new SObject[] { ppr });
```

If you're using REST API, submit a PATCH request to the PackagePushRequest sObject endpoint, as in the following example. SOAP API is also supported.

```
PATCH
/services/data/v38.0/objects/packagepushrequest/0DV...
{
  "Status" : "Pending"
}
```

Checking the Status of a Push Request

The PackagePushRequest status is `Succeeded` if all its associated jobs are successful; it's `Failed` if at least one job failed.

```
// Finds the status of the PackagePushRequest for a given Id
final String PACKAGE_PUSH_REQUEST_STATUS_QUERY = "Select status from PackagePushRequest"
+
  " where Id = '%s'";

// ppr is a PackagePushRequest instance
QueryResult queryResult = conn.query(String.format(PACKAGE_PUSH_REQUEST_STATUS_QUERY,
  ppr.getId()));

// extract the status from the QueryResult
String status = ((PackagePushRequest) queryResult.getRecords()[0]).getStatus();

// optionally, update the PackagePushRequest instance with the latest status
ppr.setStatus(status);
```

You can also check the status of a job by querying the PackagePushJob's `Status` field.

Aborting a Push Request

You can abort a package push request by changing its status to `Canceled`.

For example, if you're using the REST API, submit a PATCH request to the PackagePushRequest sObject endpoint.

```
PATCH
/services/data/v38.0/objects/packagepushrequest/0DV...
{
  "Status" : "Canceled"
}
```

The following example is for Java.

```
// ppr is the PackagePushRequest instance
ppr.setStatus("Canceled");
```

You can abort a package push request only if its status is `Created` or `Pending`. If the abort succeeds, all associated push jobs are also canceled. If you try to abort when the current PackagePushRequest status is `Canceled`, `Succeeded`, `Failed`, or `In Progress`, the abort doesn't occur, and an error message is returned.

PackageSubscriber

Represents an installation of a package in an org. This object contains installation information for managed or unlocked packages developed in the org you're logged in to.

One record is created per installation. For example, if 5 orgs installed 2 packages, 10 records are created.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

To initiate a push upgrade for a first-generation managed package, the Upload AppExchange Packages user permission is required.

To initiate a push upgrade for an unlocked or second-generation managed package, the Create and Update Second-Generation Packages user permission is required.

The push upgrade feature is only available to first- and second-generation managed packages that have passed AppExchange security review. To enable push upgrades for your managed package, log a support case in the [Salesforce Partner Community](#).

For unlocked packages, push upgrades are enabled by default.

Fields

Field Name	Details
CustomUpgradeType	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The type of push upgrade customization. Possible values are: • <code>BlockedBySubscriber</code>—Blocked By Subscriber • <code>None</code> The default value is <code>None</code>.
HasRestrictionEnabled	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the subscriber org has blocked push upgrades. The default value is <code>false</code>.

Field Name	Details
InstalledStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description If the package is installed in the org, the value is <code>1</code>.
InstanceName	Type string Properties Filter, Group, Nillable, Sort Description The instance that hosts the subscriber org.
IsCustomUpgradeAllowed	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the package developer has allowed a subscriber to opt into customized push upgrades. The default value is <code>false</code>.
MetadataPackageId	Type reference Properties Filter, Group, Nillable, Sort Description The package ID. Package IDs have a prefix of <code>033</code>. This field is available in API version 49.0 and later.
MetadataPackageVersionId	Type reference Properties Filter, Group, Nillable, Sort Description The 18-character package version ID starting with <code>04t</code>.
OrgKey	Type string

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description The 15-character ID that represents the Salesforce org.
OrgName	Type string Properties Filter, Group, Nillable, Sort Description The name of the org where the package is installed.
OrgStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Valid values are: • Active • Demo • Free • Inactive • Trial Orgs with an <code>OrgStatus</code> of <code>Inactive</code> can't receive push upgrades.
OrgType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Valid values are: • Production • Sandbox
ParentOrg	Type string Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description The production org from which a sandbox was created.

Usage

Here are examples of the types of API queries you can perform.

Query	String
Get all package subscriber orgs with a specific package ID	SELECT Id, OrgKey, OrgStatus, OrgName, OrgType FROM PackageSubscriber WHERE MetadataPackageVersionId = '04t...'
Get all package subscriber orgs that have an installed package created by the org you're logged in to	SELECT Id, OrgKey, OrgStatus, OrgName, OrgType FROM PackageSubscriber WHERE InstalledStatus = 'i'

Filter PackageSubscriber Objects by Instance

If you have packages with many subscribers, querying PackageSubscriber objects can take a while. To improve query performance, add filters to your PackageSubscriber queries, such as an InstanceName filter. InstanceName is a field that represents the instance that the subscriber org is hosted on.

1. Get the org's package and the latest released version of the package.

```
/**
 * Get the MetadataPackage object corresponding to this org's managed package
 */
public MetadataPackage getMetadataPackage() throws ConnectionException {
    // retrieve the managed package, which won't have an empty namespace
    QueryResult result = conn.query("select id from MetadataPackage where namespaceprefix
<> ''");

    return (MetadataPackage) result.getRecords()[0];
}

/**
 * Get the latest MetadataPackageVersion object of the given MetadataPackage
 */
public MetadataPackageVersion getLatestMetadataPackageVersion(MetadataPackage
metadataPackage)
throws ConnectionException {
    // get the latest released version of the given package
    String query = "Select id, ReleaseState, MajorVersion, MinorVersion, PatchVersion,
MetadataPackageId"
        + " From MetadataPackageVersion"
        + " Where MetadataPackageId = '%s' and ReleaseState = 'Released'"
        + " Order by majorversion desc, minorversion desc, patchversion desc";
```

```

    QueryResult result = conn.query(String.format(query, metadataPackage.getId()));

    return (MetadataPackageVersion) result.getRecords()[0];
}

```

2. Get eligible subscribers. The following query strings and methods are modified to allow querying for PackageSubscribers filtered by an instance.

```

static final String PACKAGE_SUBSCRIBER_ORG_KEY_QUERY = "Select OrgKey from
PackageSubscribers where OrgStatus = 'Active'"
+ " and InstalledStatus = 'I'"
+ " and InstanceName = '%s'"; // placeholder for instance values

static final String METADATA_PACKAGE_VERSION_QUERY = "Select Id, Name, ReleaseState,
(%) from MetadataPackageVersion"
+ " where MetadataPackageId = '%s' AND ReleaseState = 'Released'"
+ " AND (MajorVersion < %s OR (MajorVersion = %s and MinorVersion < %s))"
+ " OR (MajorVersion = %s and MinorVersion = %s and PatchVersion < %s));"

/**
 * Get all PackageSubscribers on the given instance that are eligible to upgrade to the
 * given
 * MetadataPackageVersion
 */
public PackageSubscriber[] getEligibleSubscriberIds(MetadataPackageVersion version,
String instanceName) throws ConnectionException {
    String allPackageId = version.getMetadataPackageId();
    Integer major = version.getMajorVersion();
    Integer minor = version.getMinorVersion();
    Integer patch = version.getPatchVersion();

    return getEligibleSubscriberIds(major, minor, patch, allPackageId, instanceName);
}

public PackageSubscriber[] getEligibleSubscriberIds(Integer major, Integer minor, Integer
patch, String packageId, String instanceName) throws ConnectionException {
    String subscriberQuery = String.format(PACKAGE_SUBSCRIBER_ORG_KEY_QUERY, instanceName);
    QueryResult results = conn.query(String.format(METADATA_PACKAGE_VERSION_QUERY,
subscriberQuery, packageId, major, major, minor, major, minor, patch));

    return Arrays.stream(results.getRecords()).map(MetadataPackageVersion.class::cast)
        .filter(mpv -> mpv.getPackageSubscribers() != null)
        .flatMap(mpv -> Arrays.stream(mpv.getPackageSubscribers().getRecords()))
        .map(PackageSubscriber.class::cast)
        .toArray(PackageSubscriber[]::new);
}

```

3. Put it all together. The following code sample shows how to use the previous methods to modify the workflow to perform package pushes by instance.

```

String[] instances = { "NA4" }; // Here we list the instances we would like to push to
MetadataPackage metadataPackage = api.getMetadataPackage();
MetadataPackageVersion version = api.getLatestMetadataPackageVersion(metadataPackage);

```

```
// do pushes by instance to avoid API timeouts retrieving PackageSubscribers
for (String instanceName : instances) {
    PackageSubscriber[] eligibleSubscribers = api.getEligibleSubscriberIds(version,
    instanceName);

    // ... proceed with creating PushRequests and PushJobs as before
}
```

Participant

Represents a participant in a ConversationParticipant. An existing or new Participant is referenced each time a new ConversationParticipant is created. This object is available in API version 57.0 and later.

 **Note:** This object is available for Einstein Conversation Insights customers whose data is stored natively on the Salesforce Platform. If you turned on Einstein Conversation Insights for the first time starting in Spring '26, this object is available to query and access using Salesforce tools. For existing ECI customers, data migration and access to related Salesforce Platform objects is scheduled to begin in Summer '26.

Supported Calls

describeSObjects(), query(), retrieve()

Fields

Field	Details
ParticipantAppType	Type string Properties Filter, Group, idLookup, Sort Description The type of app used by the participant, such as messaging, chatbot, live_message, agent.
ParticipantRole	Type string Properties Filter, Group, Nillable, Sort Description The role of this participant in the conversation, such as System, Agent, Chatbot, EndUser, Supervisor, or Router.
ParticipantSubject	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The subject of this participant in the conversation.

Partner

Represents a partner relationship between two Account records or between an Opportunity record and an Account record.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
<code>AccountFromId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort Description Required if <code>OpportunityId</code> is null. ID of the main account in a partner relationship between two accounts. Specifying this field when creating a Partner record creates two AccountPartner records, one for each direction of the relationship. If you specify the <code>OpportunityId</code> field, you can't specify this field as well. This is a relationship field. Relationship Name AccountFrom Relationship Type Lookup Refers To Account
<code>AccountToId</code>	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description Required. ID of the Partner Account related to either an opportunity or an account. You must specify this field when creating an Opportunity Partner or an Account Partner record. This is a relationship field. Relationship Name AccountTo Relationship Type Lookup Refers To Account
IsPrimary	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Valid for Opportunity Partners only. Indicates that the account is the primary partner for the opportunity. Only one account can be marked as primary for an opportunity. If you set this field to 1 (<code>true</code>) upon insert of a new opportunity partner, this field is automatically set to 0 (<code>false</code>) for any other primary partners for that opportunity. Label is Primary.
OpportunityId	Type reference Properties Create, Filter, Group, Nillable, Sort Description Required if <code>AccountFromId</code> is null. ID of the opportunity in a partner relationship between an account and an opportunity. Specifying this field when creating a record creates an OpportunityPartner record. If you specify the <code>AccountFromId</code> field, you can't also specify this field. This is a relationship field. Relationship Name Opportunity Relationship Type Lookup Refers To Opportunity

Field	Details
ReversePartnerId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the reciprocal Partner record in a partner relationship.
Role	Type picklist Properties Create, Filter, Group, Nillable, Sort Description UserRole that the account has toward the related opportunity or account, such as consultant or distributor.

Roles

In the Salesforce user interface, system administrators can set up the valid role values and their corresponding reverse role values in the PartnerRole object. Each account in the relationship is assigned a `Role` (such as `Consultant` or `Distributor`) designating that account's role toward the related account or opportunity.

Creating an Account-Opportunity Partner Relationship

When you create a partner relationship between an account and an opportunity (when you create a Partner record and specify the `OpportunityId` field), the API automatically creates two OpportunityPartner records, one for the forward relationship and one for the reverse.

- The value of the Partner field `AccountToId` maps to the value of the OpportunityPartner field `AccountToId`.
- The values of the `OpportunityId`, `Role`, and `IsPrimary` fields in both the Partner and OpportunityPartner records are the same.
- If you set the `IsPrimary` value to 1 (`true`) upon insert of a new OpportunityPartner, the `IsPrimary` value is automatically set to 0 (`false`) for any existing primary partners for that opportunity.

This mapping allows the API to manage the records and their relationships efficiently.

Creating an Account-Account Partner Relationship

When you create a partner relationship between two accounts (when you create a Partner record and specify the `AccountFromId`), the API automatically creates two AccountPartner records, one for the forward relationship and one for the reverse. For example, if you create a Partner relationship with "Acme, Inc." as the `AccountFromId` and "Acme Consulting" as the `AccountToId`, the API automatically creates two AccountPartner records:

- The forward relationship AccountPartner with "Acme, Inc." as the `AccountFromId` and "Acme Consulting" as the `AccountToId`.
- The reverse relationship AccountPartner with "Acme Consulting" as the `AccountFromId` and "Acme, Inc." as the `AccountToId`.

- The value of the `Role` field in the reverse relationship `AccountPartner` is set to the `PartnerRole` record `ReverseRole` value associated with the value of the `Role` field in the forward relationship `AccountPartner`.

This mapping allows the API to manage the records and their relationships efficiently.

SEE ALSO:

[AccountPartner](#)

[OpportunityPartner](#)

[UserRole](#)

[PartnerRole](#)

PartnerFundAllocation

Represents allocated funds from a partner marketing budget for channel partners. This object is available in API version 41.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Fields

Field Name	Details
Amount	Type currency Properties Create, Filter, Sort, Update Description Total amount of the allocation.
BudgetId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the partner marketing budget.
ChannelPartnerId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the channel partner.

Field Name	Details
	 Note: The ChannelPartnerId field isn't supported for formula fields, custom buttons, or custom links for the PartnerFundAllocation object. This limitation also applies to the PartnerMarketingBudget and PartnerFundRequest objects.
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the allocation.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last interacted with this record, directly or indirectly.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (LastReferencedDate), but not viewed it.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of the allocation.
Title	Type string Properties Create, Filter, Group, Sort, Update Description The title of the allocation.

Field Name	Details
TotalApprovedFcs	Type currency Properties Filter, Nillable, Sort Description Total amount of approved fund claims.
TotalApprovedFrs	Type currency Properties Filter, Nillable, Sort Description Total amount of approved fund requests.
TotalReimbursedFcs	Type currency Properties Filter, Nillable, Sort Description Total amount of reimbursed fund claims.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[PartnerFundAllocationFeed](#)

Feed tracking is available for the object.

[PartnerFundAllocationHistory](#)

History is available for tracked fields of the object.

[PartnerFundAllocationOwnerSharingRule](#)

Sharing rules are available for the object.

[PartnerFundAllocationShare](#)

Sharing is available for the object.

PartnerFundClaim

Represents a claim of funds from the partner marketing budget by a channel partner. This object is available in API version 41.0 and later.

Supported Calls

`create()` `delete()` `describeLayout()` `describeSObjects()` `getDeleted()` `getUpdated()` `query()` `retrieve()`
`search()` `update()`, `upsert()`

Fields

Field Name	Details
AllocationId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the partner fund allocation.
Amount	Type currency Properties Create, Filter, Sort, Update Description Amount of the claim.
BudgetId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the partner marketing budget.
ChannelPartnerId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the channel partner.
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the fund claim.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field Name	Details
	Description The timestamp when the current user last interacted with this record, directly or indirectly.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (LastReferencedDate), but not viewed it.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of the fund claim.
RequestId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the partner fund request.
Status	Type picklist Properties Create, Filter, Group, Nillable Restricted picklist, Sort, Update Description Status of the fund claim. Values are: • Draft • Approved • Rejected • Paid
Title	Type string

Field Name	Details
	Properties Create, Filter, Group, Sort, Update
	Description Title of the fund claim.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[PartnerFundClaimFeed](#)

Feed tracking is available for the object.

[PartnerFundClaimHistory](#)

History is available for tracked fields of the object.

[PartnerFundClaimOwnerSharingRule](#)

Sharing rules are available for the object.

[PartnerFundClaimShare](#)

Sharing is available for the object.

PartnerFundRequest

Represents a request for funds from the partner marketing budget by a channel partner. This object is available in API version 41.0 and later.

Supported Calls

`create()`, `delete()` `describeLayout()` `describeSObjects()`
`getDeleted()` `getUpdated()` `query()` `retrieve()` `search()` `update()`, `upsert()`

Fields

Field Name	Details
Activity	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Activity that is covered by the funds, for example, a trade show or seminar.
AllocationId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the partner fund allocation.
Amount	Type currency Properties Create, Filter, Nillable, Sort, Update Description Approved amount of request.
BudgetId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the partner marketing budget.
ChannelPartnerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the channel partner.  Note: The ChannelPartnerId field isn't supported for formula fields, custom buttons, or custom links for the PartnerFundRequest object. This limitation also applies to the PartnerFundAllocation and PartnerMarketingBudget objects.
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the fund request.
DesiredOutcome	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description Desired outcome if requested funds are used.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last interacted with this record, directly or indirectly.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (LastReferencedDate), but not viewed it.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of the fund request.
RequestedAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description Amount of the fund request.
Status	Type picklist Properties Create, Filter, Nillable, Group, Restricted picklist, Sort, Update Description Status of the fund request. Values are: • Draft • Approved

Field Name	Details
	Rejected
Title	Type string Properties Create, Filter, Group, Sort, Update Description Title of the fund request.
TotalApprovedFcs	Type currency Properties Filter, Nillable, Sort Description Total amount of approved fund claims.
TotalReimbursedFcs	Type currency Properties Filter, Nillable, Sort Description Total amount of reimbursed fund claims.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[PartnerFundRequestFeed](#)

Feed tracking is available for the object.

[PartnerFundRequestHistory](#)

History is available for tracked fields of the object.

[PartnerFundRequestOwnerSharingRule](#)

Sharing rules are available for the object.

[PartnerFundRequestShare](#)

Sharing is available for the object.

PartnerMarketingBudget

Represents a budget that provides funds to channel partners for selling and marketing products and services. This object is available in API version 41.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Fields

Field Name	Details
Amount	Type currency Properties Create, Filter, Sort, Update Description Total amount of the budget.
ChannelPartnerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the channel partner. This field is available in API version 45.0 and later.  Note: The ChannelPartnerId field isn't supported for formula fields, custom buttons, or custom links for the PartnerMarketingBudget object. This limitation also applies to the PartnerFundAllocation and PartnerFundRequest objects.
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the budget.
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Date when the budget is no longer available.
IsIgnoreValidation	Type boolean

Field Name	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description When enabled, ignores restrictions related to the child objects connected to the budget. Note that individual totals for allocation amounts, request amounts, and claims amounts cannot exceed the total of their parent budget. Field is default off (false) on create. Once enabled (true), this field cannot be disabled. This field is available in API version 44.0 and later.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last interacted with this record, directly or indirectly.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (LastReferencedDate), but not viewed it.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of the budget.
StartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Date when the budget becomes available.
Title	Type string

Field Name	Details
	Properties Create, Filter, Group, Sort, Update Description Title of the budget.
TotalAllocatedAmount	Type currency Properties Filter, Nillable, Sort Description Total funds allocated to channel partners or as a fund pool.
TotalApprovedFcs	Type currency Properties Filter, Nillable, Sort Description Total amount of approved fund claims.
TotalApprovedFrs	Type currency Properties Filter, Nillable, Sort Description Total amount of approved fund requests.
TotalReimbursedFcs	Type currency Properties Filter, Nillable, Sort Description Total amount of reimbursed fund claims.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Type of budget. Values are: Co-Operated Budget—Funds accrue based on a percentage of partner sales. The funds are available based on previous activity.

Field Name	Details
	• Marketing Funds—Funds are issued to partners in advance of sales. The funds are awarded based on predicted or expected behavior.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[PartnerMarketingBudgetFeed](#)

Feed tracking is available for the object.

[PartnerMarketingBudgetHistory](#)

History is available for tracked fields of the object.

[PartnerMarketingBudgetOwnerSharingRule](#)

Sharing rules are available for the object.

[PartnerMarketingBudgetShare](#)

Sharing is available for the object.

PartnerNetworkConnection

Represents a Salesforce to Salesforce connection between Salesforce organizations.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

As of Winter '21 and later, only authenticated internal and external users can access this object.

Fields

Field	Details
<code>AccountId</code>	Type reference Properties Filter, Group, Nillable, Sort Description ID of the Account associated with this connection.
<code>ConnectionName</code>	Type string

Field	Details
	Properties Filter, idLookup, Sort Description A descriptive name for the connection. Limit: 295 characters.
ConnectionStatus	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The status of the Salesforce to Salesforce connection. The picklist includes the following values: • Sent • Received • Pending • Accepted • Rejected • Inactive • Disconnecting • ConnectionSuspended • SubscribeInProgress • UsersInitialSync • BulkSyncMetadata
ConnectionType	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The type of Salesforce to Salesforce connection. The picklist includes the following values: • Standard • Replication This field is available in API version 30.0 and later.
ContactId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description ID of the Contact associated with this connection.
IsSyncAuditFields	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Specifies whether audit fields are synced between the primary and secondary organization in a replication connection. This field is available in API version 32.0 and later, and is only accessible in Salesforce organizations where Organization Sync is enabled.
IsSyncMetadata	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Specifies whether supported types of metadata are synced from the primary to the secondary organization in a replication connection. This field is available in API version 33.0 and later, and is only accessible in Salesforce organizations where Organization Sync is enabled.
IsSyncUsers	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Specifies whether users with standard Salesforce user licenses are synced between the primary and secondary organization in a replication connection. This field is available in API version 35.0 and later, and is only accessible in Salesforce organizations where Organization Sync is enabled.
PrimaryContactId	Type reference Properties Filter, Group, Sort Description ID of the User associated with this connection.
ReplicationRole	Type picklist

Field	Details
	Properties Filter, Group, Nillable, Restricted picklist, Sort Description The role of this Salesforce organization in the replication connection. The picklist includes the following values: • Primary • Secondary This field is available in API version 30.0 and later, and is only accessible in Salesforce organizations where Organization Sync is enabled.
ResponseDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the connection was accepted or rejected.

Usage

Represents Salesforce to Salesforce standard and replication connections. This object is referenced by all objects that have been shared with other organizations, enabling you to determine which connections shared a record with you. If the organization does not have Salesforce to Salesforce enabled, the PartnerNetworkConnection object is not available, and you can't access it via the API.

SEE ALSO:

[PartnerNetworkRecordConnection](#)

PartnerNetworkRecordConnection

Represents a record shared between Salesforce organizations using Salesforce to Salesforce.

Supported Calls

`create()`, `query()`

Special Access Rules

As of Winter '21 and later, only authenticated internal and external users can access this object.

Fields

Field	Details
ConnectionId	Type reference Properties Create, Filter, Group, Nillable, Sort Description Required. ID of the connection a record is shared with.
EndDate	Type dateTime Properties Filter, Nillable, Sort Description Date that sharing of the record was stopped.
LocalRecordId	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the shared record.
ParentRecordId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the parent record of the shared record.
PartnerRecordId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the shared record in the connection's organization.
RelatedRecords	Type string Properties Create, Filter, Nillable, Sort

Field	Details
	Description A comma-separated list of API names for child records to be shared with a parent record.
SendClosedTasks	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Forwards closed tasks related to the shared record.
SendEmails	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Sends an email notifying the connection's representative that you have forwarded the record to them. Only new recipients of a record will receive a notification email.
SendOpenTasks	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Forwards open tasks related to the shared record.
StartDate	Type dateTime Properties Filter, Nillable, Sort Description Date that the shared record was accepted.
Status	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The status of the shared record. One of the following values: • Active (received) • Active (sent)

Field	Details
	• Connected • Inactive • Inactive (converted) • Inactive (deleted) • Pending (sent)

Usage

When you create a `PartnerNetworkRecordConnection`, you forward a record to a connection.



Note: Attempting to forward a record from an object to which the connection is not subscribed results in an `Invalid Partner Network Status` error.

When you delete a `PartnerNetworkRecordConnection`, you stop sharing a record with a connection.

- To share a record, use the following fields: `LocalRecordID` and `ConnectionId`
- To share a child of a parent record, use the following fields: `LocalRecordID`, `ConnectionId`, and `ParentRecordID`
- To share a child of a parent record and its child records, use the following fields: `LocalRecordID`, `ConnectionId`, `ParentRecordID`, and `RelatedRecords`

If the organization does not have Salesforce to Salesforce enabled, the `PartnerNetworkRecordConnection` object is not available, and you can't access it using the API.

SEE ALSO:

[PartnerNetworkConnection](#)

PartnerNetworkSyncLog

Represents the Org Sync Log tab in Salesforce, where Salesforce administrators can track the replication of record inserts and updates being performed in Organization Sync. The Connection Detail page for the replication connection also displays the Org Sync Log's twenty most recent entries, and provides a link to the log.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Special Access Rules

The Org Sync Log tab can only be added in organizations where Organization Sync has been enabled. To add the tab to the Salesforce user interface, users must also have the "Manage Connections" user permission.

Fields

Field Name	Details
ConnectionEvent	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The action being replicated to the partner organization, such as a record insertion.
ConnectionId	Type reference Properties Filter, Group, Sort Description The ID of the Salesforce to Salesforce replication connection in which the replication event succeeded or failed.
Description	Type textarea Properties Nillable Description A description of the replication event.
EntityType	Type string Properties Filter, Group, Nillable, Sort Description The type of record being inserted or updated.
Error	Type string Properties Filter, Group, Nillable, Sort Description The code used to describe the replication failure or success.
LocalRecord	Type string Properties Filter, Group, Sort

Field Name	Details
	Description The record being inserted or updated.
Status	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description An item is added to the Organization Sync Log if it failed to be replicated to the linked organization. This picklist includes the following values: - Failed: The replication continued to fail after multiple retries, and won't be retried further. - Resolved: The replication succeeded after retrying. - Retrying: Salesforce is retrying the replication. This field is available in API version 35.0 and later.

PartnerRole

Represents a role for an account Partner, such as consultant, supplier, and so on.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
ApiName	Type string Properties Filter, Group, idLookup, Sort Description Uniquely identifies a picklist value so it can be retrieved without using an id or master label.

Field	Details
MasterLabel	Type string Properties Filter, Group, Nillable, Sort Description Master label for this partner role value. This display value is the internal label that does not get translated. Limit: 255 characters.
ReverseRole	Type picklist Properties Filter, Group, Nillable, Sort Description Name of the reverse role that corresponds to this partner role. For example, if the role is “subcontractor,” then the reverse role might be “general contractor.” In the user interface, assigning a partner role to an account creates a reverse partner relationship so that both accounts list the other as a partner.
SortOrder	Type int Properties Filter, Group, Nillable, Sort Description Number used to sort this value in the partner role picklist. These numbers are not guaranteed to be sequential, as some previous partner role values might have been deleted.

Usage

This object represents a value in the partner role picklist. In the user interface, the partner role picklist provides additional information about the role of a Partner, such as their corresponding reverse role. Query this object to retrieve the set of values in the partner role picklist, and then use that information while processing `PartnerRole` records to determine more information about a given partner role. For example, the application could determine the reverse role of a given `Partner Role` value and the value of the `ReverseRole` property in the associated `PartnerRole` object.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

PartyConsent

Represents consent preferences for an individual. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Action	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The action that the Individual is consenting to. Possible values are: • CrossDevice • DataCollection • Reidentification • Segment • ShareData • Target
CaptureContactPointType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Required. Indicates how you captured consent. Possible values are: • Email • MailingAddress • Phone • Social • Web
CaptureDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Required. Date when consent was captured.

Field	Details
CaptureSource	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Required. Indicates how you captured consent. For example, a website or online form.
DoubleConsentCaptureDate	Type dateTime Properties Filter, Group, Nillable, Sort Description The specific date and time the consent was confirmed for the data subject via a secondary verification method (for example, clicking a link in a confirmation email). Essential for high-standard Double Opt-In audit trails.
EffectiveFrom	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date the data subject's consent becomes valid. Use this field to track the beginning of the legal period for which the party has agreed to data processing or communication.
EffectiveTo	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date the data subject's consent expires or is scheduled to end. This field helps automate compliance by identifying when consent should no longer be honored.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the party consent record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the account owner associated with this customer. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PartyId	Type reference Properties Create, Filter, Group, Sort, Update Description Required. Represents the record based on the Individual object you want to associate consent with. This is a relationship field. Relationship Name Party Relationship Type Lookup Refers To Individual

Field	Details
PrivacyConsentStatus	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Required. Identifies whether the individual associated with this record agrees to this form of contact. Possible values are: • NotSeen • OptIn • OptInPending—Available in API version 58.0 and later. • OptOut • OptOutPending—Available in API version 58.0 and later. • Seen

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PartyConsentChangeEvent

Change events are available for the object.

PartyConsentFeed

Feed tracking is available for the object.

PartyConsentHistory

History is available for tracked fields of the object.

PartyConsentOwnerSharingRule

Sharing rules are available for the object.

PartyConsentShare

Sharing is available for the object.

Payment

Represents a single event when a shopper makes a payment. For credit cards, this event is a payment capture or payment sale, but it doesn't appear on the shopper's credit card statement. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

 **Note:** You can edit or delete a payment only in draft state, which you specify with the **Status** field.

Special Access Rules

To access Salesforce Payments objects with the API, your org must have one or more of these licenses: Salesforce Payments, Salesforce Order Management, B2B Commerce, or D2C Commerce. Salesforce Payments objects are available only in Lightning Experience.

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The account of the customer who made the payment. This field is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
Amount	Type currency Properties Create, Filter, Sort, Update Description The amount to be debited or captured.
Balance	Type currency Properties Filter, Nillable, Sort Description The total amount – the net applied amount.
CancellationDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description The date that the payment was voided.
CancellationEffectiveDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date when the cancellation of this payment takes effect.
CancellationGatewayDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The gateway provides this date following a successful cancellation request.
CancellationGatewayRefNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description System-provided unique transaction ID from the payment gateway.
CancellationGatewayResultCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Gateway-specific result code. Must be mapped to a Salesforce-specific result code.
CancellationSfResultCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A Salesforce result code that can be mapped to one or more gateway result codes. We recommend that the payment gateway adapter layer maps gateway-specific codes to the Salesforce result code.
ClientContext	Type textarea

Field	Details
	Properties Nillable Description Contains caller context for payment APIs. Useful for re-establishing context during an asynchronous payment transaction.
Comments	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Users can provide additional details about the payment record. Supports a maximum of 1000 characters.
CorporateCurrencyCvsnDate	Type date Properties Filter, Group, Nillable, Sort, Update Description The date on which the invoice s total amount with tax was converted to the corporate currency. Available in API version 63.0 and later.
CorporateCurrencyCvsnRate	Type double Properties Filter, Nillable, Sort, Update Description The exchange rate that s used to convert the invoice s total amount with tax to the corporate currency. Available in version 63.0 and later.
CorporateCurrencyISOCode	Type string Properties Filter, Group, Nillable, Sort, Update Description The currency ISO code of the corporate currency. Available in version 63.0 and later.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description Three-letter ISO 4217 currency code associated with the payment group record.
Date	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date when this payment record was created.
EffectiveDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date that this payment takes effect.
Email	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description Email address of the user who initiated the payment.
GatewayDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The gateway provides this date for reference following a successful gateway communication.
GatewayRefDetails	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Additional data that can't be stored in other fields on the payment record. You can use this field for transactions following the initial transaction that creates the payment record. You can use any data that isn't normalized in financial entities. This field has a maximum length of 1000 characters and can store data as JSON or XML.

Field	Details
GatewayRefNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Unique transaction ID created by the payment gateway.
GatewayResultCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Gateway-specific result code that must map to a Salesforce-specific result code. One Salesforce result code can map to multiple gateway result codes.
GatewayResultCodeDescription	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the gateway's result code.
ImpactAmount	Type currency Properties Filter, Nillable, Sort Description Shows the payment's financial impact against the customer's accounts receivable. If the payment is valid, this value is the negative of the payment amount. If the payment is voided, this value is 0.
IpAddress	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The IP address of the user who initiated the payment.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record is possibly referenced (LastReferencedDate) but not viewed.
LegalEntityId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The legal entity used in this invoice. Available in API version 65.0 and later. This field is a relationship field. Relationship Name LegalEntity Refers To LegalEntity
MacAddress	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The MAC address of the person who initiated the payment.
NetApplied	Type currency Properties Filter, Nillable, Sort Description Total payment amount that has been applied, including adjustments.
NetPaymentCreditApplied	Type currency Properties Filter, Sort

Field	Details
	Description Total payment amount that has been credited. This amount is equal to TotalPaymentCreditApplied - TotalPaymentCreditUnapplied. This field is a calculated field. This field is available in API version 65.0 and later.
NetRefundApplied	Type currency Properties Filter, Nillable, Sort Description Total refund amount that has been applied to the payment, including adjustments.
OrderPaymentSummaryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Order payment summaries show the balances of each authorization, capture, and refund made against an order.
PaymentAuthorizationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The authorization record for this payment. If there's a delayed capture (when the capture occurs after the authorization), all captures must be made against a previously successful authorization transaction. This field is a relationship field. Relationship Name PaymentAuthorization Relationship Type Lookup Refers To PaymentAuthorization
PaymentGatewayId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description ID of the payment gateway that processed the payment. If there's a delayed payment, the field is populated from the authorization record. This field is a relationship field. Relationship Name PaymentGateway Relationship Type Lookup Refers To PaymentGateway
PaymentGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Payment groups organize all the payment transactions that have been made against a record such as an account or contract. If there's a delayed payment, the field is populated from the authorization record. This field is a relationship field. Relationship Name PaymentGroup Relationship Type Lookup Refers To PaymentGroup
PaymentIntentGuid	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort Description Unique ID of the payment sent to Stripe or PayPal. Links the Payments Merchant Account record with the payment at the payment provider.
PaymentMethodId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The payment method that the customer used to provide this payment information.

Field	Details
	This field is a relationship field. Relationship Name PaymentMethod Relationship Type Lookup Refers To PaymentMethod
PaymentNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description System-created unique ID for this payment record.
Phone	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description Phone number of the customer who initiated the payment.
ProcessingMode	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Defines whether the payment has been made outside of the payment platform. Possible values are: • External: Transactions happened outside of the Salesforce payments platform. • Salesforce: Salesforce made and recorded an external call to the payment gateway.
SfResultCode	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Salesforce-specific result code that can map to one or more gateway result codes. We recommend configuring the payment gateway adapter layer to map gateway result codes to the appropriate Salesforce result code. Possible values are:

Field	Details
	• Decline: The gateway call failed, but if the problem is fixed and the transaction is retried, it can work. For example, the customer had insufficient funds or briefly lost their connection. • Indeterminate: The gateway didn't respond to the call. This response usually happens when Salesforce times out while waiting for a response from the gateway. • PermanentFail: The gateway call failed. If tried again, it still doesn't work. Gateway calls fail permanently for one of two reasons: – Hard Decline: The customer's payment account has been closed or terminated. – Fraud: The gateway recognized the payment or payment method as known fraud. • RequiresReview: The customer bank requires more information before completing the payment. • Success: The gateway call succeeded. • SystemError: Salesforce ended the payment request before receiving a response. For example, Salesforce lost credentials or access to its server. Salesforce ends payment calls if it doesn't receive a response from the gateway within two minutes. • ValidationError: Customer payment data was incorrect, such as a misspelling in the credit card address or an incorrect CVV.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Defines the state of this payment. Possible values are: • Canceled: This payment has been unapplied from its target and can no longer be allocated. • Draft: The payment can be edited before posting it and allocating it to a target. The payment can also be deleted. • Processed: This payment has been finalized and can be allocated against a target. Users can manually change the Status field's values as follows: • Draft to Processed • Processed to Canceled • Draft to Canceled
TotalApplied	Type currency Properties Filter, Nillable, Sort Description The total amount of this payment's balance that has been applied against an invoice.

Field	Details
TotalPaymentCreditApplied	Type currency Properties Filter, Sort Description The total amount of all credit types that have been applied against this payment. This field is a calculated field. This field is available in API version 65.0 and later.
TotalPaymentCreditUnapplied	Type currency Properties Filter, Sort Description The total amount of all credit types that haven't been applied against this payment. This field is a calculated field. This field is available in API version 65.0 and later.
TotalRefundApplied	Type currency Properties Filter, Nillable, Sort Description The total amount of a refund that has been applied against this payment.
TotalRefundUnapplied	Type currency Properties Filter, Nillable, Sort Description The total amount of a previously applied refund that has since been unapplied from this payment.
TotalUnapplied	Type currency Properties Filter, Nillable, Sort Description The total amount of this payment that was previously applied and then unapplied.

Field	Details
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Defines how the customer used this payment. Possible values are: • Capture • Sale

SEE ALSO:

[OrderPaymentSummary](#)

PaymentAuthAdjustment

Shows information about an adjustment made to an authorized transaction. This object is available in API version 51.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`



Note: You can only delete a payment in draft state, which you specify in the **Status** field.

Special Access Rules

To access Salesforce Payments objects with the API, your org must have one or more of these licenses: Salesforce Payments, Salesforce Order Management, B2B Commerce, or D2C Commerce. Salesforce Payments objects are available only in Lightning Experience.

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The account for the payment authorization adjustment. Inherited from the payment authorization.

Field	Details
	This is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
Amount	Type currency Properties Create, Filter, Sort, Update Description Amount of adjustment applied to the parent payment authorization.
Comments	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Users can add comments to provide additional details about a record. Maximum of 1000 characters.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Three-letter ISO 4217 currency code associated with the payment authorization adjustment record.
Date	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date that the adjustment occurred.
EffectiveDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description The date that the adjustment takes effect on the authorization.
Email	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description Email address of the parent payment authorization owner.
GatewayDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time that the reversal transaction occurred in the payment gateway.
GatewayRefDetails	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Additional data that can't be stored in other fields on the payment record. You can use this field for transactions following the initial transaction that creates the payment record. You can use any data that isn't normalized in financial entities. This field has a maximum length of 1000 characters and can store data as JSON or XML.
GatewayRefNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Unique transaction ID created by the payment gateway.
GatewayResultCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Gateway-specific result code. Must be mapped to a Salesforce-specific result code

Field	Details
GatewayResultCodeDescription	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the gateway's result code. This field is useful for providing more information around why the gateway returned a certain result code.
IpAddress	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The IP address of the user who initiated the payment adjustment.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (<code>LastReferencedDate</code>) and not viewed.
MacAddress	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The MAC address of the person who initiated the payment.
PaymentAuthAdjustmentNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort

Field	Details
	Description System-provided unique ID for a payment authorization adjustment record.
PaymentAuthorizationId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the payment authorization on which the adjustment occurred. This is a relationship field. Relationship Name PaymentAuthorization Relationship Type Lookup Refers To PaymentAuthorization
PaymentIntentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the payment intent record. This field is a relationship field. Relationship Name PaymentIntent Relationship Type Lookup Refers To PaymentIntent
Phone	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description Phone number of the customer who initiated the authorization adjustment.
ProcessingMode	Type picklist

Field	Details
	Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Defines whether the payment has been made outside of the payment platform. Possible values are: • <code>External</code>—Transactions happened outside of the Salesforce payments platform. • <code>Salesforce</code>—Salesforce made and recorded an external call to the payment gateway.
<code>SfResultCode</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Salesforce-specific result code that can map to one or more gateway result codes. We recommend configuring the payment gateway adapter layer to map gateway result codes to the appropriate Salesforce result code. Possible values are: • <code>Decline</code>—The gateway call failed, but it might work if the transaction is attempted again. For example, the customer had insufficient funds or briefly lost their connection. • <code>Indeterminate</code>—The gateway didn't respond to the call. This response usually happens when Salesforce times out while waiting for a response from the gateway. • <code>PermanentFail</code>—The gateway call failed and won't work even if tried again. Gateway calls fail permanently for one of two reasons: – <code>Hard Decline</code>: The customer's payment account has been closed or terminated. – <code>Fraud</code>: The gateway recognized the payment or payment method as known fraud. • <code>RequiresReview</code>—The customer bank requires more information before completing the payment. • <code>Success</code>—The gateway call succeeded. • <code>SystemError</code>—Salesforce ended the payment request before receiving a response. For example, Salesforce lost credentials or access to its server. Salesforce ends payment calls if it doesn't receive a response from the gateway within two minutes. • <code>ValidationError</code>—Customer payment data was incorrect, such as a misspelling in the credit card address or an incorrect CVV.
<code>Status</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Defines the state of the payment authorization reversal.

Field	Details
	Possible values are: • Canceled—The payment authorization reversal has been canceled. The parent authorization has returned to its pre-reversal balance. • Draft: The payment authorization reversal can be edited before applying it against the parent authorization. • Pending: The payment authorization reversal is pending. This value is available in API version 61.0 and later. • Processed—The payment authorization reversal has been finalized. Users can manually change the Status field's values as follows: • Draft to Processed • Processed to Canceled • Draft to Canceled
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Defines how the customer used the reversal. Possible value is: • Reversal

PaymentAuthorization

Represents a single payment authorization event where users can capture or reverse a payment against a reserve of funds. This object is available in API version 48.0 and later.

A common type of payment authorization occurs when a user sees a pending transaction against their credit card account.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`



Note: You can only delete a payment in draft state, which you specify in the **Status** field.

Special Access Rules

To access Salesforce Payments objects with the API, your org must have one or more of these licenses: Salesforce Payments, Salesforce Order Management, B2B Commerce, or D2C Commerce. Salesforce Payments objects are available only in Lightning Experience.

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Customer account. This is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
Amount	Type currency Properties Create, Filter, Sort, Update Description The amount authorized for the payment event.
Balance	Type currency Properties Filter, Nillable, Sort Description Authorized amount – total processed captured amount – total processed authorization reversal amount. Balance can be positive or negative.
Comments	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Users can enter comments to provide additional details about the authorization.
CurrencyIsoCode	Type picklist

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Three-letter ISO 4217 currency code associated with the payment authorization record.
Date	Type dateTime Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description By default, the day the authorization record was created. Users can also enter a different date. Editable only when the payment authorization's status is Draft.
EffectiveDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date on which the authorization takes effect. Editable only when the payment authorization's status is Draft.
Email	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description Email address of the person who initiated the payment.
ExpirationDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Authorizations can't be captured after their expiration dates.
GatewayAuthCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Authorization approval code from the payment gateway.

Field	Details
GatewayDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time that of the gateway communication that leads to the successful payment authorization.
GatewayRefDetails	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Additional data that can't be stored in other fields on the payment record. You can use this field for transactions following the initial transaction that creates the payment record. You can use any data that isn't normalized in financial entities. This field has a maximum length of 1000 characters and can store data as JSON or XML.
GatewayRefNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Unique transaction ID from the payment gateway.
GatewayResultCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Gateway-specific result code. Must be mapped to a Salesforce-specific result code.
GatewayResultCodeDescription	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the gateway's result code. This field is useful for providing more information around why the gateway returned a certain result code.
IpAddress	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The IP address of the user who initiated the payment authorization.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MacAddress	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The MAC address of the person who initiated the payment.
OrderPaymentSummaryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Order payment summaries show the balances of each authorization, capture, and refund made against an order.
PaymentAuthorizationNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description System-provided unique ID for a payment authorization record.

Field	Details
PaymentGatewayId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The Salesforce payment gateway record that created this authorization. This gateway will be used for subsequent captures. This is a relationship field. Relationship Name PaymentGateway Relationship Type Lookup Refers To PaymentGateway
PaymentGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Payment groups organize all the payment transactions that have been made against a record such as an account or contract. Populated from the authorization record if there is delayed payment. This is a relationship field. Relationship Name PaymentGroup Relationship Type Lookup Refers To PaymentGroup
PaymentIntentGuid	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort Description Unique ID of the payment sent to Stripe or PayPal. Links the Payments Merchant Account record with the payment at the payment provider.
PaymentMethodId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The customer payment method provided during this authorization. This is a relationship field. Relationship Name PaymentMethod Relationship Type Lookup Refers To PaymentMethod
Phone	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description Phone number of the person who initiated the payment.
ProcessingMode	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Defines whether the payment has been made outside of the payment platform. Possible values are: • External—Transactions happened outside of the Salesforce payments platform. • Salesforce—Salesforce made and recorded an external call to the payment gateway.
SfResultCode	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Salesforce-specific result code that can map to one or more gateway result codes. We recommend configuring the payment gateway adapter layer to map gateway result codes to the appropriate Salesforce result code. Possible values are: • Decline—The gateway call failed, but it may still work if the transaction is attempted again. For example, the customer had insufficient funds or briefly lost their connection.

Field	Details
	• Indeterminate—The gateway didn't respond to the call. This response usually happens when Salesforce times out while waiting for a response from the gateway. • PermanentFail—The gateway call failed and won't work even if tried again. Gateway calls fail permanently for one of two reasons: – Hard Decline: The customer's payment account has been closed or terminated. – Fraud: The gateway recognized the payment or payment method as known fraud. • RequiresReview—The customer bank requires more information before completing the payment. • Success—The gateway call succeeded. • SystemError—Salesforce ended the payment request before receiving a response. For example, Salesforce lost credentials or access to its server. Salesforce ends payment calls if it doesn't receive a response from the gateway within two minutes. • ValidationError—Customer payment data was incorrect, such as a misspelling in the credit card address or an incorrect CVV.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Defines the state of this payment. Possible values are: • Canceled—This payment has been unapplied from its target and can no longer be allocated. • Draft—The payment can be edited before posting it and allocating it to a target. • Failed—Authorization for the payment failed. • Pending— • Processed—This payment has been finalized and can be allocated against a target. Users can manually change the Status field's values as follows: • Draft to Processed • Processed to Canceled • Draft to Canceled
TotalAuthReversalAmount	Type currency Properties Filter, Nillable, Sort Description The sum of all processed authorization reversals against the payment authorization. This is a calculated field.

Field	Details
TotalPaymentCaptureAmount	Type currency Properties Filter, Nillable, Sort Description The sum of all authorization captures related to this payment authorization.

SEE ALSO:

[OrderPaymentSummary](#)

PaymentCredit

Tracks the amount of money returned to the customer. The return can be a store credit, a gift card, or another type of credit. It's linked to the original payment record and includes the total credit amount issued. This object is available in API version 65.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is only available in Salesforce Order Management orgs or if the B2B Commerce or D2C Commerce license is enabled. Users require the PaymentCredit and PaymentPlatform permission sets.

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The account of the customer who made the payment. This field is a relationship field. This is a required field. Relationship Name Account

Field	Details
	Refers To Account
Amount	Type currency Properties Create, Filter, Sort Description The amount to be credited. This is a required field.
Balance	Type currency Properties Filter, Nillable, Sort Description Balance of payment credits (NetApplied - TotalCredit TransactionAmount - TotalCredit PendingTransactionAmount).
Comments	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Provide additional details about the payment credit transaction.
CreditMemoId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the credit memo associated with the payment credit. This field is a relationship field. Relationship Name CreditMemo Refers To CreditMemo
CreditType	Type picklist

Field	Details
	Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Credit types available. This is a dynamic picklist that the user can define. Possible values are: • Credit • Gift Card • Gift Certificate
CreditTypeCategory	Type picklist Properties Filter, Group, Restricted picklist, Sort Description A static enum showing the credit category type. Possible value is: • Credit
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Contains the ISO code for any currency allowed by the organization. Possible values are: • EUR—Euro • GBP—British Pound • USD—U.S. Dollar The default value is USD.
EffectiveDate	Type dateTime Properties Create, Filter, Sort, Update Description Effective date of the payment credit.
LastReferencedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description Timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.
NetApplied	Type currency Properties Filter, Nillable, Sort Description Total of all credit amounts applied for this payment credit (TotalCreditApplied - TotalCreditUnapplied).
OrderPaymentSummaryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the order payment summary. This field is a relationship field. Relationship Name OrderPaymentSummary Refers To OrderPaymentSummary
PaymentCreditNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description ID of the payment credit record. This field is automatically generated. Example: PC-{0000000000}.

Field	Details
PaymentId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the payment associated with the payment credit. This field is a relationship field. Relationship Name Payment Refers To Payment
ReturnOrderId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the return order associated with the payment credit. This field is a relationship field. Relationship Name ReturnOrder Refers To ReturnOrder
TotalApplied	Type currency Properties Filter, Nillable, Sort Description Sum of all applied amounts from the payment credit line payment.
TotalCreditPendingTxnAmt	Type currency Properties Filter, Nillable, Sort Description Sum of pending payment credits.
TotalCreditTxnAmt	Type currency

Field	Details
	Properties Filter, Nillable, Sort Description Sum of processed payment credits.
TotalUnapplied	Type currency Properties Filter, Nillable, Sort Description Sum of all the unapplied amounts from the payment credit line payment.

PaymentCreditLinePayment

A payment credit line payment. This object is available in API version 65.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is only available in Salesforce Order Management orgs or if the B2B Commerce or D2C Commerce license is enabled. Users require the `PaymentCredit` and `PaymentPlatform` permission sets.

Fields

Field	Details
Amount	Type currency Properties Create, Filter, Sort Description Amount to apply to or unapply from the payment to the credit. This is a required field.
AppliedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description Date payment was applied. Can be the current date or a provided date.
AssociatedAccountId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the customer account. This field is a relationship field. Relationship Name AssociatedAccount Refers To Account
AssociatedLineId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the associated line. This field is a relationship field. Relationship Name AssociatedLine Refers To PaymentCreditLinePayment
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Contains the ISO code for any currency allowed by the organization. Possible values are: • EUR—Euro • GBP—British Pound • USD—U.S. Dollar The default value is USD.

Field	Details
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description regarding the payment credit.
HasBeenUnapplied	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the refund line record with type <code>Applied</code> has been unapplied. Not applicable for a refund line record with type <code>Unapplied</code>. This is a required field.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
PaymentCreditId	Type reference Properties Create, Filter, Group, Sort Description ID of the payment credit. This field is a relationship field. This is a required field. Relationship Name PaymentCredit

Field	Details
	Refers To PaymentCredit
PaymentCreditLine PaymentNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Number of the payment credit line payment. This field is automatically generated. Example: PCLP-{000000000}.
PaymentId	Type reference Properties Create, Filter, Group, Sort Description ID of the applied payment credit. This field is a relationship field. Relationship Name Payment Relationship Type Master-detail Refers To Payment (the master object)
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Payment credit type. This is a required field. Possible values are: • Applied • Unapplied
UnappliedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description Date payment was unapplied. Can be the current date or a provided date.

PaymentCreditTransaction

A payment credit transaction. This object is available in API version 65.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is only available in Salesforce Order Management orgs or if the B2B Commerce or D2C Commerce license is enabled. Users require the `PaymentCredit` and `PaymentPlatform` permission sets.

Fields

Field	Details
Amount	Type currency Properties Create, Filter, Sort Description Amount of the payment credit transaction. This is a required field.
AssociatedAccountId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the customer account. This field is a relationship field. Relationship Name AssociatedAccount Refers To Account

Field	Details
ClientContext	Type textarea Properties Nillable Description Additional information about the payment credit transaction.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Contains the ISO code for any currency allowed by the organization. Possible values are: • EUR—Euro • GBP—British Pound • USD—U.S. Dollar The default value is USD.
ExternalReference	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Reference ID used to track the payment credit transaction.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.

Field	Details
PaymentCreditId	Type reference Properties Create, Filter, Group, Sort Description ID of the payment credit. This field is a relationship field. This is a required field. Relationship Name PaymentCredit Relationship Type Master-detail Refers To PaymentCredit (the master object)
PaymentCreditTransactionNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Number of the payment credit transaction. This field is automatically generated. Example: PCT- { 000000000 }.
ProcessingMode	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Credit transaction processing mode. Possible values are: • External • Salesforce This is a required field.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A static enum showing the status of the credit transaction.

Field	Details
	Possible values are: • Canceled • Draft • Failed • Pending • Processed
TransactionMessage	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Message describing the transaction.

PaymentGateway

Platform object that represents the connection to an external payment gateway. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access Salesforce Payments objects with the API, your org must have one or more of these licenses: Salesforce Payments, Salesforce Order Management, B2B Commerce, or D2C Commerce. Salesforce Payments objects are available only in Lightning Experience.

Fields

Field	Details
Comments	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Admin-provided details about a record. Maximum of 1000 characters.

Field	Details
DefaultTapToPayLocation	Type string Properties Filter, Group, Nillable, Sort Description Stores the locationId of the location record created at Stripe. The Field Service app uses the location to process where tap-to-pay transactions are made.
ExternalReference	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description Identifier of an external payment gateway. This field is unique within your organization.
GatewayMode	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The operational mode of the payment gateway. This field determines the payment gateway's ability to accept payments. For production orgs, the gateway must be in Live mode. Possible values are: • Connected— Payment gateway is active but it can't accept payments. This option is only valid in production orgs. • Live— Payment gateway is active and can accept payments. This option is only valid in production orgs. • Test —Payment gateway is active but not able to accept payments. This option is only valid in sandbox orgs, and the account can accept only test transactions.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed this record. If this value is null, it's possible this record is only referenced (LastReferencedDate) but not viewed.
MerchantAccountId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the merchant account used by the payment gateway. This merchant account links to a merchant account at a payment processor. This field is a relationship field. Relationship Name MerchantAccount Relationship Type Lookup Refers To MerchantAccount
MerchantCredentialId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the merchant credential setup entity to reference merchant information. This field is a relationship field. Relationship Name MerchantCredential Relationship Type Lookup Refers To NamedCredential
PaymentGatewayName	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Admin-defined name for the payment gateway.

Field	Details
PaymentProcessor	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Name of payment gateway provider. Possible values are: • Paypal • Stripe
PaymentStatus	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The payment gateway is active and can accept payments. Possible values are: • Enabled • Disabled The default value is Disabled.
PayoutStatus	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Money can be moved from the payment provider account to the merchant bank account linked to it. Possible values are: • Enabled • Disabled The default value is Disabled.
PaymentGatewayProviderId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the payment gateway that handles transactions between the merchant account and the payment processor.

Field	Details
	This field is a relationship field. Relationship Name PaymentGatewayProvider Relationship Type Lookup Refers To PaymentGatewayProvider
ProviderAccount	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Account ID assigned by the payment provider that identifies the linked Salesforce Payments account.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Defines whether Salesforce Payments can use this payment gateway for calls to the external payment gateway. Inactive payment gateways can't be used. Possible values are: • Active - the merchant account can accept payments. • Complete - <code>PaymentStatus</code> and <code>DepositStatus</code> are enabled and the account provided all the required information. • Enabled - <code>PaymentStatus</code> and <code>PayoutStatus</code> are enabled, but the payment provider can require more information later. If the merchant doesn't provide the information then the account can become restricted. The time limit that the merchant has to provide the information is longer than the <code>RestrictedSoon</code> state. • Pending - The merchant account exists but it can't accept payments. This option maintains backward compatibility for accounts that were created with API version 55.0 and earlier. Pending is no longer in use for API version 57.0 and higher. • Rejected - The payment provider has rejected the merchant account with an explanation. • Restricted - merchant account functionality is limited. This state is only applicable if <code>PaymentStatus</code>, <code>PayoutStatus</code>, or both are disabled. • RestrictedSoon - <code>PaymentStatus</code> and <code>PayoutStatus</code> are enabled, but the payment provider requires more information. If the merchant doesn't provide the information in a specific time period, then the merchant account becomes restricted.

PaymentGatewayLog

Stores information exchanged between the Salesforce payments platform and external payment gateways. Gateway logs can also record payloads from external payment entities. This object is available in API version 48.0 and later.

Deleting or archiving a payment gateway log doesn't impact financial data on other payment entities.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access Salesforce Payments objects with the API, your org must have one or more of these licenses: Salesforce Payments, Salesforce Order Management, B2B Commerce, or D2C Commerce. Salesforce Payments objects are available only in Lightning Experience.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Available only for organizations with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
GatewayAuthCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Authorization approval code from the gateway.
GatewayAVSCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Code sent by gateways that use an address verification system.
GatewayDate	Type dateTime

Field	Details
	Properties Create, Filter, Nillable, Sort, Update Description The date and time that of the gateway communication that leads to the creation of this gateway log.
GatewayMessage	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Information or error messages sent from the gateway.
GatewayRefNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Unique transaction ID created by the payment gateway.
GatewayResultCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Gateway-specific result code. Must be mapped to a Salesforce-specific result code.
GatewayResultCodeDescription	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the gateway's result code. This field is useful for providing more information around why the gateway returned a certain result code.
InteractionStatus	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Describes the result of communication between the payments platform and a payment gateway.

Field	Details
	Possible values are: - Failed - Initiated - NoOp - Success - Timeout
InteractionType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Describes the type of interaction with the gateway. This field is required for logs created in Salesforce. Possible values are: - Authorization - AuthorizationReversal - Avs - Capture - CheckGiftCardBalance - PostAuth - ReferencedRefund - Sale - Tokenize - Void
IsNotification	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description For asynchronous transactions, shows whether the gateway log belongs to the notification (yes) or the initial transaction (no). Possible values are: - No - Yes
LastReferencedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
OrderPaymentSummaryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Order payment summaries show the balances of each authorization, capture, and refund made against an order.
PaymentGatewayId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The Payments Platform payment gateway record used for communication with the external payment gateway. This field is a relationship field. Relationship Name PaymentGateway Relationship Type Lookup Refers To PaymentGateway
PaymentGatewayLogNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort

Field	Details
	Description System-generated unique ID for this payment gateway log record.
ReferencedEntityId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Foreign key with DomainSet of PaymentAuth and Payment. This field is a polymorphic relationship field. Relationship Name ReferencedEntity Relationship Type Lookup Refers To CardPaymentMethod, Payment, PaymentAuthAdjustment, PaymentAuthorization, Refund
Request	Type textarea Properties Create, Nillable, Update Description Raw payload. No sensitive attributes are stored.
Response	Type textarea Properties Create, Nillable, Update Description Raw payload.
RetryCategory	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The retry category returned by the payment gateway for the failed payment. This field is available in API version 66.0 and later. Possible values are: • CardLimit— Insufficient funds, exceeded spending limits, or other restrictions on the card.

Field	Details
	• <code>GatewayConnection</code>—Connectivity or communication errors between systems, including upstream gateway errors. • <code>PaymentInformation</code>—Missing or incorrect data such as incorrect card numbers, addresses, or currencies. • <code>PaymentProcessing</code>—Payment account is invalid, closed, restricted, or the transaction was declined for reasons other than insufficient funds. • <code>Security</code>—Security violations or issues such as fraud, risk, authentication, verification, and authorization. • <code>Unknown</code>—Payment gateway error code isn't recognized or isn't mapped to a specific category.
<code>SfRefNumber</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description If an <code>IdempotencyKey</code> was passed in the API request, its value is stored here in text format.
<code>SfResultCode</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Salesforce-specific result code that can map to one or more gateway result codes. We recommend configuring the payment gateway adapter layer to map gateway result codes to the appropriate Salesforce result code. Possible values are: • <code>Decline</code>: The gateway call failed. If the transaction is attempted again, it can still work. For example, the customer has insufficient funds or briefly lost their connection. • <code>Indeterminate</code>: The gateway didn't respond to the call. This response usually happens when Salesforce times out while waiting for a response from the gateway. • <code>PermanentFail</code>: The gateway call failed and can't work. Gateway calls fail permanently for one of two reasons: – <code>Hard Decline</code>: The customer's payment account has been closed or terminated. – <code>Fraud</code>: The gateway recognized the payment or payment method as known fraud. • <code>RequiresReview</code>: The customer bank requires more information before completing the payment. • <code>Success</code>: The gateway call succeeded. • <code>SystemError</code>: Salesforce ended the payment request before receiving a response. For example, Salesforce lost credentials or access to its server. Salesforce ends payment calls if it doesn't receive a response from the gateway within two minutes.

Field	Details
	• <code>ValidationError</code>: Customer payment data was incorrect, such as a misspelling in the credit card address or an incorrect CVV.

PaymentGatewayProvider

Setup entity for payment gateways. Defines the connection to a payment gateway Apex adapter. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

To access Salesforce Payments objects with the API, your org must have one or more of these licenses: Salesforce Payments, Salesforce Order Management, B2B Commerce, or D2C Commerce. Salesforce Payments objects are available only in Lightning Experience.

Fields

Field	Details
<code>ApexAdapterId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of an APEX adapter class. The adapter interacts with your payment gateway to complete transactions. This field is unique within your organization. This field is a relationship field. Relationship Name ApexAdapter Relationship Type Lookup Refers To ApexClass
<code>Comments</code>	Type textarea Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description Additional details about a record. Maximum of 1000 characters.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description (Optional) An internal name you assign the adapter. For reference only.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
IdempotencySupported	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description If the same payment request is made in rapid succession, this field defines whether the Payments platform charges the customer or merchant's card multiple times for the same transaction. This situation can occur when a user clicks a Pay button twice, or the gateway's server goes down after fulfilling a payment request and the client immediately tries making another payment. If this field has a value of Yes, the Payments platform ignores identical payment requests made immediately after an original request. Different payment gateways have varying levels of idempotency support. When configuring a new payment gateway integration, plan accordingly. Possible values are: • No • Yes
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Customer language used for the payment gateway.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MasterLabel	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description User-friendly name of the payment gateway provider.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description Namespace for the payment gateway platform.

PaymentGroup

Top-level object that groups all payment transactions that are processed for an order or invoice. PaymentGroup is a standalone object, so it isn't required for users to execute payment transactions (authorizations, captures, refunds, and sales). This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access Commerce Payments entities, your org must have a Salesforce Order Management license with the Payment Platform org permission activated. Commerce Payments entities are available only in Lightning Experience.

Fields

Field	Details
PaymentGroupNumber	Type string

Field	Details
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description System-defined unique ID for the payment group.
SourceObjectId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The order or invoice related to all the payment transactions in the payment group. This is a relationship field.
	Relationship Name SourceObject
	Relationship Type Lookup
	Refers To Order

PaymentInitiationSource

Represents the originating source of a payment. This information helps other Salesforce products integrate with Salesforce Payments. This object is available in API version 63.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Special Access Rules

To access Salesforce Payments objects, you must have a Salesforce Payments license with the Payments permission enabled for your org. Salesforce Payments entities are available only in Lightning Experience.

Fields

Field	Details
AccountId	Type reference

Field	Details
	Properties Filter, Group, Nillable, Sort, Update Description The account record that initiated this payment. This field is a relationship field. Relationship Name Account Refers To Account
Application	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort, Update Description Salesforce application initiating the payment. Possible values are: • Collections • Commerce • Custom • FieldService • OrderManagement • Payments • Revenue • Sales • Scheduler • Service
Channel	Type string Properties Filter, Group, Nillable, Sort, Update Description The origin of the submitted payment. For example, D2C, virtual terminal, or merchant MOTO (mail order or phone order).
CollectionPlanId	Type reference Properties Filter, Group, Nillable, Sort, Update

Field	Details
	Description The collection plan record that submitted payment. This field is available only for merchant-initiated payment collections. For example, a merchant collects an outstanding balance using a Pay Now payment link or over the phone. This field is a relationship field. Relationship Name CollectionPlan Refers To CollectionPlan
ContactId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The contact record of the contact that made the payment. This field is a relationship field. Relationship Name Contact Refers To Contact
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for organizations with the multicurrency feature enabled. This field contains the ISO code for any currency allowed by the organization. Possible values are: • AUD—Australian Dollar • EUR—Euro • GBP—British Pound • USD—U.S. Dollar The default value is USD.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (<code>LastReferencedDate</code>), but not viewed it.
Name	Type string Properties Filter, Group, idLookup, Sort, Update Description Name of the payment initiation source record. For example, d9e01178-b6878-2f4b-a14d-b0132b7ret67
OpportunityId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The opportunity record that made the payment. This field is a relationship field. Relationship Name Opportunity Refers To Opportunity
OrderSummaryId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The order summary record that initiated the payment. This field is available with Salesforce Order Management and Commerce applications. This field is a relationship field.

Field	Details
	Relationship Name OrderSummary
	Refers To OrderSummary
PaymentScheduleItemId	Type reference
	Properties Filter, Group, Nillable, Sort, Update
	Description The payment schedule item record that initiated the payment. This field is available only with the Scheduler application. This field is a relationship field.
	Relationship Name PaymentScheduleItem
	Refers To PaymentScheduleItem
Process	Type string
	Properties Filter, Group, Nillable, Sort, Update
	Description Component within the application that's initiating the payment. Maximum length of the string is 255 characters. For example, managed or custom checkout, product description page (PDP).
QuoteId	Type reference
	Properties Filter, Group, Nillable, Sort, Update
	Description The quote record that initiated the payment. This field is a relationship field.
	Relationship Name Quote
	Refers To Quote
ServiceAppointmentId	Type reference

Field	Details
	Properties Filter, Group, Nillable, Sort, Update Description The service appointment record that initiated the payment. This field is available only with the Field Service application. This field is a relationship field. Relationship Name ServiceAppointment Refers To Appointment
SiteId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The site record that initiated the payment. This field is for applications that don't have a web store, but created a digital experience site to accept payments This field is a relationship field. Relationship Name Site Refers To Site
WebCartId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The web cart record that submitted the payment. This field is a relationship field. Relationship Name WebCart Refers To WebCart
WebStoreId	Type reference Properties Filter, Group, Nillable, Sort, Update

Field	Details
	Description The web store record that initiated the payment. For example, a B2B, D2C, or Pay Now store. This field is a relationship field. Relationship Name WebStore Refers To WebStore
WorkOrderId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The work order record that submitted the payment. This field is available only for the Field Service application. This field is a relationship field. Relationship Name WorkOrder Refers To WorkOrder
WorkOrderLineItemId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The work order line item record that made the payment. This field is only available with the Field Service application. This field is a relationship field. Relationship Name WorkOrderLineItem Refers To WorkOrderLineItem

PaymentIntent

Represents data temporarily stored during a transaction's lifecycle that can identify the buyer, the merchant, and the amount the buyer is sending to the merchant. Data such as timestamp and amount returned can also be stored in PaymentIntent. This object is available in API version 58.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Special Access Rules

To access Salesforce Payments objects, you must have a Salesforce Payments license with the Payments permission enabled for your org. Salesforce Payments entities are available only in Lightning Experience.

Fields

Field	Details
AccountId	Type reference Properties Filter, Group, Nillable, Sort Description The account record of the buyer. This field is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
AmountCapturable	Type currency Properties Filter, Nillable, Sort Description Payment amount that a merchant can collect after the fulfillment of an order.
AmountRefundable	Type currency Properties Filter, Nillable, Sort Description The amount of the payment that the merchant can refund.
AuthorizationReversalAmount	Type currency

Field	Details
	Properties Filter, Nillable, Sort Description Amount canceled before completing the transfer of funds from buyer to merchant.
AuthorizedAmount	Type currency Properties Filter, Nillable, Sort Description Amount authorized by the payer's bank.
BillingAddress	Type address Properties Filter, Nillable Description The billing address of the account holder. This field is the compound form of the billing address. Read-only. For details on compound address fields, see Address Compound Fields.
BillingCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the billing address. The maximum size is 40 characters.
BillingCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the billing address. The maximum size is 80 characters.
BillingCountryCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO country code for the billing address.

Field	Details
BillingGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Accuracy level of the geocode for the billing address. For details on geolocation compound fields, see Compound Field Considerations and Limitations.
BillingLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>BillingLongitude</code> to specify the precise geolocation of a billing address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations.
BillingLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>BillingLatitude</code> to specify the precise geolocation of a billing address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places. See Compound Field Considerations and Limitations for details on geolocation compound fields.
BillingPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the billing address. Maximum size is 20 characters.
BillingState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the billing address. Maximum size is 80 characters.
BillingStreet	Type textarea

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the billing address.
CapturedAmount	Type currency Properties Filter, Nillable, Sort Description Total amount that a merchant secured from a buyer.
ContextData	Type string Properties Nillable Description Additional metadata or information about a payment, such as the source of the payment, user data, or any other relevant information that can help in processing or tracking the payment.
CurrencyIsoCode	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description ISO code for any currency allowed by the organization. Available only for orgs with the multicurrency feature enabled. Possible values are: • Euro • USD The default is USD.
DisputeEvidenceDueDate	Type dateTime Properties Filter, Nillable, Sort Description Date by which the merchant must submit information related to the dispute.

Field	Details
DisputeFee	Type currency Properties Filter, Nillable, Sort Description The amount that the credit card company charges the merchant for each disputed payment. The fee is also known as a chargeback fee.
DisputeStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The state of the disputed transaction. Possible values are: • Closed—The dispute inquiry is closed. • Created—The payment gateway opens a payment dispute. • Lost—The bank ruled in the account owner's favor and refunded the charge. The refund is permanent and the dispute fee isn't returned. • Won—The bank ruled in the merchant's favor. The issuing bank returns the debited chargeback amount to the payment gateway, who passes this amount back to the merchant.
DisputedAmount	Type currency Properties Filter, Nillable, Sort Description The amount the customer is challenging.
EntryMode	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates how the payment information was provided. Possible values are: • Flow—Salesforce flow that initiated the payment. • Merchant—The credit card isn't available so the merchant entered the payment information via the phone or an email. • Payer_Online—The payer entered their payment information online.

Field	Details
	• <code>Place_Order_V2</code>—The payment was initiated from the Place Order V2 Orchestration. • <code>TapToPay</code>—The card was available and the payer tapped that card or device on the payment terminal.
<code>Guid</code>	Type string Properties Filter, Group, idLookup, Nillable, Sort Description Unique ID of the payment sent to Stripe or PayPal. This ID links the Payments Merchant Account record with the payment at the payment provider.
<code>IncurrenceStatus</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Status of an orphaned payment. An orphaned payment occurs when a payment transaction is complete, but the workflow is disrupted, and the payment isn't recorded in the consuming flow. An unexpected error can cause an orphaned payment. For example, a payment is accepted at checkout, but the order doesn't get placed because of a network issue. Possible values are: • <code>Canceled</code>—The workflow was disrupted and the payment was canceled or refunded. • <code>Claimed</code>—The payment was recorded and the workflow was completed. • <code>Pending</code>—The consuming workflow hasn't recorded the payment yet. If there isn't a value for this field, it means that the consumer doesn't rely on it to track orphaned payments.
<code>IntentAmount</code>	Type currency Properties Filter, Nillable, Sort Description Total amount that a merchant expects to receive from a buyer.
<code>IsCaptureComplete</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Verification whether the funds for a given payment are paid.

Field	Details
	The default value is <code>false</code> .
IsEvidenceSubmitted	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Status of the requested information that the merchant provides to the bank about the dispute. The default value is <code>false</code> .
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced but not viewed.
MerchantAccountId	Type reference Properties Filter, Group, Sort Description Required field. The merchant account record associated with a payment intent record. This field is a relationship field. Relationship Name MerchantAccount Relationship Type Lookup Refers To MerchantAccount
PaymentGatewayId	Type reference

Field	Details
	Properties Filter, Group, Nillable, Sort Description The payment gateway record that processed the payment. Relationship Name PaymentGateway Relationship Type Lookup Refers To PaymentGateway
PaymentGroupId	Type reference Properties Filter, Group, Nillable, Sort Description Payment groups organize all the payment transactions that have been made against a record such as an account or contract. This is a relationship field. This field is available in API version 65.0 and later. Relationship Name PaymentGroup Relationship Type Lookup Refers To PaymentGroup
PaymentInitiationSourceId	Type reference Properties Filter, Group, Nillable, Sort Description The payment initiation source record associated with the payment. The record identifies the originating application and object of the payment..lo Relationship Name PaymentInitiationSource Relationship Type Lookup Refers To PaymentInitiaionSource

Field	Details
PaymentIntentNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Autogenerated number assigned to the payment record, for example <code>PI-000000001</code>.
PaymentLinkGmvDate	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Date the payment is captured from a payment link transaction. The total amount paid is expressed as the Gross Merchandise Value (GMV).
PaymentLinkId	Type reference Properties Filter, Group, Nillable, Sort Description The payment link record. This field is a relationship field. Relationship Name PaymentLink Relationship Type Lookup Refers To PaymentLink
PaymentMethodDetails	Type string Properties Filter, Group, Nillable, Sort Description Additional information about the payment method type such as the four last digits of a card number.
PaymentMethodId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description The payment method record, indicating a card payment method, digital wallet, or alternative payment method. This field is a polymorphic relationship field. Relationship Name PaymentMethod Relationship Type Lookup Refers To PaymentMethod
PaymentMethodSubType	Type string Properties Filter, Group, Nillable, Sort Description A payment method that exists as a subtype of a payment method type. For example, Visa, Mastercard, and American Express exist as subtypes of payment method types such as Apple Pay and Google Pay.
PaymentMethodType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Payment method used for the transaction.
ProviderReference	Type string Properties Filter, Group, Nillable, Sort Description A payment record at the payment gateway that identifies the payment provider.
RefundedAmount	Type currency Properties Filter, Nillable, Sort Description Total or partial amount refunded to the buyer due to product return, merchant's lack of inventory, or shipping and delivering problems.

Field	Details
ShippingAddress	Type address Properties Filter, Nillable Description Delivery address for the purchase. The compound form of the shipping address. Read-only. See Address Compound Fields for details on compound address fields.
ShippingCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details of the shipping address. City maximum size is 40 characters.
ShippingCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details of the shipping address. Country maximum size is 80 characters.
ShippingCountryCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO country code for the shipping address.
ShippingGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Accuracy level of the geocode for the shipping address. For details on geolocation compound fields, see Compound Field Considerations and Limitations.
ShippingLatitude	Type double Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description Used with <code>ShippingLongitude</code> to specify the precise geolocation of a shipping address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations.
<code>ShippingLongitude</code>	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>ShippingLatitude</code> to specify the precise geolocation of an address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations.
<code>ShippingPostalCode</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details of the shipping address. The maximum size of the postal code is 20 characters.
<code>ShippingState</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details of the shipping address. State maximum size is 80 characters.
<code>ShippingStreet</code>	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Details of the shipping address. Maximum of 255 characters.
<code>Status</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Status of the payment record. Possible values are:

Field	Details
	• Authorized • Canceled • Created • Expired • Failed • PartiallyCaptured • PartiallyRefunded • Pending • Refunded • Succeeded
SubmittedById	Type reference Properties Filter, Group, Nillable, Sort Description The submitted by record, which identifies who processes the payment on the customer's behalf. The customer provides the authorization to submit the payment over the phone or through the mail. This field is a relationship field. Relationship Name SubmittedBy Relationship Type Lookup Refers To User

PaymentIntentEvent

Represents a payment intent platform event. Subscribe to these events so you can listen and respond to them when they're published. For example, create a Salesforce Flow that is triggered when one of these events is published. This object is available in API version 59.0 and later.

For more information about platform events, see the [Platform Events Developer Guide](#).

Supported Calls

`describeSObjects()`

Special Access Rules

To access Salesforce Payments objects, you must have a Salesforce Payments license and Payments must be enabled for your org. Salesforce Payments objects are available only in Lightning Experience.

Fields

Field	Details
ChangeType	Type picklist Properties Restricted picklist Description Type of payment intent event that triggers an event notification. You can write code to operate conditionally on the value of this field. For example, you can ignore an authorization but get notified of captures. Possible values are: • Authorize—Payment is authorized. • AuthorizeFailure—There's an error preventing the payment authorization • Capture—Payment is captured. • CaptureFailure— An error prevented the payment capture. • Refund—Payment is refunded. • RefundFailure—An error prevented the payment refund.
PaymentInitiationSourceApplication	Type picklist Properties Nillable, Restricted picklist Description Salesforce application initiating the payment. This field is available in API version 63.0 and later. Possible values are: • Collections • Commerce • Custom • FieldService • OrderManagement • Payments • Revenue • Sales • Scheduler

Field	Details
	• Service
PaymentInitiationSourceChannel	Type string Properties Nillable Description Identifies the channel in the Payment Initiation Source record for which the event occurs. This field is available in API version 63.0 and later.
PaymentInitiationSource	Type reference Properties Nillable Description Identifies the Payment Initiation Source record for which the event occurs. This field is available in API version 63.0 and later. This field is a relationship field. Relationship Name PaymentInitiationSource Refers To PaymentInitiationSource
PaymentInitiationSourceProcess	Type string Properties Nillable Description Identifies the process in the Payment Initiation Source record for which the event occurs.
PaymentIntentGuid	Type string Properties Nillable Description Identifies the GUID in the Payment Initiation Source record for which the event occurs. This field is available in API version 63.0 and later.
PaymentIntent	Type reference Properties Nillable

Field	Details
	Description Identifies the PaymentIntent record for which the event occurs. This field is available in API version 63.0 and later. This field is a relationship field. Relationship Name PaymentIntent Relationship Type Lookup Refers To PaymentIntent
PaymentLink	Type reference Properties Nillable Description Identifies the payment link record for which the event occurs. This field is available in API version 63.0 and later. This field is a relationship field. Relationship Name PaymentLink Refers To PaymentLink

PaymentLineInvoice

Represents a payment allocated to or unallocated from an invoice. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access Commerce Payments entities, your org must have a Salesforce Order Management license with the Payment Platform org permission activated. Commerce Payments entities are available only in Lightning Experience.

Fields

Field	Details
Amount	Type currency Properties Create, Filter, Sort Description Total amount applied or unapplied by this payment line.
AppliedDate	Type dateTime Properties Create, Filter, Nillable, Sort Description The date that this line was applied to an invoice or payment. If this field is null, it inherits the value of the payment line invoice's Date field.
AssociatedAccountId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The account for this payment line's target invoice. This is a relationship field. Relationship Name AssociatedAccount Relationship Type Lookup Refers To Account
AssociatedPaymentLineId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The paymentLine that was unapplied. Populated only when PaymentLineInvoice's Type field has a value of Unapplied. This is a relationship field. Relationship Name AssociatedPaymentLine

Field	Details
	Relationship Type Lookup Refers To PaymentLineInvoice
Comments	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Users can add comments to provide additional details about a record. Maximum of 1000 characters.
Date	Type dateTime Properties Create, Filter, Nillable, Sort Description The date and time that this payment line was created.
EffectiveDate	Type dateTime Properties Create, Filter, Nillable, Sort Description Defines the date and time when the payment line application or unapplication becomes effective.
EffectiveImpactAmount	Type currency Properties Filter, Nillable, Sort Description Shows how this payment invoice line impacts a customer's accounts receivable. This value is positive when PaymentLineInvoice's Type field is Applied, and negative when PaymentLineInvoice's Type is Unapplied. If there's an unapplied line related to this record, EffectiveImpactAmount has a value of 0.  Note: EffectiveImpactAmount evaluates only the applied and unapplied line pair. Therefore, the effective impact amount could be different for different lines within the same payment.

Field	Details
HasBeenUnapplied	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Defines whether this payment line has been unapplied from the target invoice. Has a value of NA when PaymentInvoiceLine's Type field has a value of Unapplied. Can be No or Yes if Type has a value of Applied. Possible values are: • NA • No • Yes
ImpactAmount	Type currency Properties Filter, Nillable, Sort Description Shows the payment's financial impact against the customer's accounts receivable. If PaymentLineInvoice has a Type of Applied, the ImpactAmount is the negative equivalent of the line's Amount field. Otherwise, ImpactAmount equals Amount.
InvoiceId	Type reference Properties Create, Filter, Group, Sort Description Target invoice for this payment line. This is a relationship field. Relationship Name Invoice Relationship Type Lookup Refers To Invoice
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, and LastReferenceDate is not null, the user accessed this record or list view indirectly.
PaymentBalance	Type currency Properties Filter, Nillable, Sort Description Total balance of this line's parent payment record following the application or unapplication of this payment line.
PaymentId	Type reference Properties Create, Filter, Group, Sort Description Parent payment for this payment line. This is a relationship field. Relationship Name Payment Relationship Type Lookup Refers To Payment
PaymentLineInvoiceNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description System-defined unique ID for this payment line.

Field	Details
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Defines whether this payment line has been applied or unapplied to the target invoice. Possible values are: • Applied • Unapplied
UnappliedDate	Type dateTime Properties Create, Filter, Nillable, Sort Description The date that this payment line was unapplied from the target invoice. Populated only when the Type field equals Unapplied. Inherits the value of the Date field.


Usage

Use a payment line to apply all or part of a payment’s balance to an invoice. The PaymentLineInvoice object represents the balance taken from the payment and applied toward the invoice. You can apply a payment’s balance when you create the payment record or afterward. The payment line must have the same currency as the parent payment.

A payment line has an amount, which represents the total amount taken from the payment, and balance, which represents the remaining amount after the payment line has been applied to an invoice. A payment’s amount can’t be less than the sum of all of its payment line amounts.

One payment can have multiple payment lines. A payment line must be related to only payment.

You can create multiple payment lines on a payment apply each line to different invoices on the same account, or to invoices on different accounts.

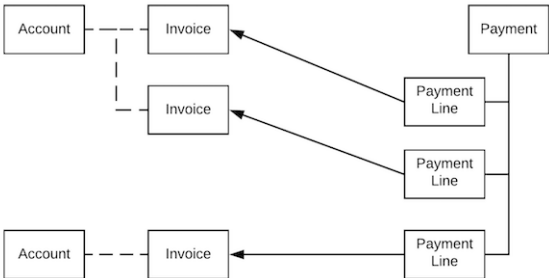

Here’s one way you could use Salesforce API to apply a payment to an invoice using a payment line.

PaymentLink

A link that a merchant can share with customers to collect payments for products and services. The payment link, which you can embed into a Salesforce app or send directly to a customer, directs the customer to a Pay Now payment page. The page can show a total amount owed or an itemized list of products, shipping and tax charges, and a total amount owed. The customer enters their contact and payment details, and submits their payment. The amounts are shown in the store's currency. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access Salesforce Payments objects, you must have a Salesforce Payments license with the Payments permission enabled for your org. Salesforce Payments entities are available only in Lightning Experience.

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Payer account. This field is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
Amount	Type currency Properties Create, Filter, Sort, Update Description Amount the payer owes.
CartId	Type reference

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the cart record. Relationship Name Cart Relationship Type Lookup Refers To Webcart
CollectionPlanId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The collection plan associated with the payment link. This field is a relationship field. Available in API version 63.0 and later with Financial Services and Automotive Cloud. Relationship Name CollectionPlan Refers To CollectionPlan
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description 3-digit ISO code for the payment currency that is shown on the Pay Now page. Possible values are: • EUR – Euro • GBP – British Pound • USD – US Dollar The default value is USD.
Description	Type textarea Properties Create, Nillable, Update

Field	Details
	Description Text on the Pay Now payment page that's visible to your customers. This text can communicate any information you want.
Expiry Time	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time that the payment link expires. The time is based on the user's time zone, not the org's time zone.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record can be referenced and not viewed directly.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who owns this record. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PaymentInitiationSource	Type string

Field	Details
	Properties Create, Filter, Nillable, Sort, Update Description The origin of the payment, based on the information in the Payment Link record.
PaymentLinkNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Auto-generated number that identifies the payment link.
PaymentMethodSetId	Type reference Properties Create, Filter, Group, Sort, Update Description Reference to the PaymentMethodSet object, which determines what payment methods are shown to the payer. This field is a relationship field. Relationship Name PaymentMethodSet Relationship Type Lookup Refers To MerchAccPaymentMethodSet
PaymentScheduleItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The payment schedule item associated with the payment link. This field is a relationship field. Available in API version 63.0 and later with Financial Services and Automotive Cloud. Relationship Name PaymentScheduleItem Refers To PaymentScheduleItem

Field	Details
PaymentUrl	Type url Properties Filter, Group, Sort Description Unique URL of the Pay Now page. This URL IS auto-generated, and not editable.
QrCodeImageId	Type reference Properties Filter, Group, Nillable, Sort Description Reference to the QR code image included in the payment link record. This field is a relationship field. Relationship Name QrCodeImage Relationship Type Lookup Refers To ContentVersion
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Indicates whether the payment link is active and can be used. Possible values are: • Active • Disabled The default value is Active.
TaxAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description Amount of the tax for the purchase. This amount is shown on the Pay Now page.

Field	Details
Title	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Title of the Pay Now page, indicating what is being paid.
Type	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort Description Indicates the type of payment link created, which the merchant can share with the customer to receive payment. The payment link also determines which Pay Now page is generated and what's included on that page. Possible values are: • <code>CheckoutWithOrder</code> (only for orgs with Payments and Commerce)—includes the amount owed based on the products you select, lists the products purchased, and calculates tax using the billing address and selected shipping options. After a customer makes a payment, this link type creates an order record. • <code>PredefinedAmount</code>—shows only an amount due for products purchased. The merchant enters the amount due when creating the payment link. • <code>WithProducts</code>—Deprecated. New payment links can't be created with this link type. The default value is <code>PredefinedAmount</code>.
UsageType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort Description Determines whether the payment link is used one time or multiple times before the configured expiration date and time. Possible values are: • <code>MultiUse</code> • <code>SingleUse</code> The default value is <code>MultiUse</code>.

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[PaymentLinkOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[PaymentLinkShare](#) on page 67

Sharing is available for the object.

PaymentLinkEvent

Represents a payment link platform event. Subscribe to these events so you can listen and respond to them when they're published. For example, create a Salesforce Flow that is triggered when one of these events is published. This object is available in API version 59.0 and later.

For more information about platform events, see the [Platform Events Developer Guide](#).

Supported Calls

`describeSObjects()`

Special Access Rules

To access Salesforce Payments objects, you must have a Salesforce Payments license and Payments must be enabled for your org. Salesforce Payments objects are available only in Lightning Experience.

Fields

Field	Details
ChangeType	Type picklist Properties Restricted picklist Description Type of payment link event, which triggers and event notification. Possible values are: - Create—Payment link created. - Delete—Payment link deleted. - Update—Payment link property changed.
PaymentLinkId	Type reference

Field	Details
	Properties Nillable
	Description Type of payment link event. You can write code to operate conditionally on the value of this field. For example, you can ignore a create change but get notified of updates. This field is a relationship field.
	Relationship Name PaymentLink
	Relationship Type Lookup
	Refers To PaymentLink

PaymentMethod

Represents the method that a buyer uses to compensate the seller of a good or service. Common payment methods include cash, checks, credit or debit cards, money orders, bank transfers, and online payment services. This object is available in API version 48.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

To access Salesforce Payments objects with the API, your org must have one or more of these licenses: Salesforce Payments, Salesforce Order Management, B2B Commerce, or D2C Commerce. Salesforce Payments objects are available only in Lightning Experience.

Fields

Field	Details
AccountId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description The account entity linked to this payment method. This field is a relationship field.
	Relationship Name Account

Field	Details
	Relationship Type Lookup Refers To Account
Comments	Type textarea Properties Nillable Description Users can add comments to provide additional details about a record. Maximum of 1000 characters.
CompanyName	Type string Properties Filter, Group, Nillable, Sort Description Company name for this payment method. Part of the payment method's address.
ImplementorType	Type string Properties Filter, Group, Nillable, Sort Description Shows the type of payment method.
IsAutoPayEnabled	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the payment method can be used for recurring payments (True) or not (False). The default value is False. This field is available in API v55.0 and later. For orgs that upgraded from v54.0, you must add this field to the Payment Method page layout in the UI. It isn't automatically added.
Name	Type string Properties Filter, Group, idLookup, Sort

Field	Details
	Description A unique number assigned to the payment method. Numbers start at 1000 and are read only, but administrators can change the format.
NickName	Type string Properties Filter, Group, Nillable, Sort Description User-defined nickname for this payment method.
PaymentMethodAddress	Type address Properties Filter, Nillable Description Full address related to the alternative payment method. For more information about address fields, see Address Compound Fields .
PaymentMethodCity	Type string Properties Filter, Group, Nillable, Sort Description Payment method address details.
PaymentMethodCountry	Type string Properties Filter, Group, Nillable, Sort Description Payment method address details.
PaymentMethodDetails	Type string Properties Filter, Group, Nillable, Sort Description Optional information about the payment method type. This field is available in API version 57.0 and later.

Field	Details
PaymentMethodGeocodeAccuracy	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Accuracy level of the geocode for the payment method address. An accuracy level contains information about the location of a latitude and longitude. For more information about geolocation fields, see Geolocation Compound Field. Possible values are: • Address • Block • City • County • ExtendedZip • NearAddress • Neighborhood • State • Street • Unknown • Zip
PaymentMethodLatitude	Type double Properties Filter, Nillable, Sort Description Latitude of the payment method address. Used with the PaymentMethodLongitude to specify the precise geolocation of the address. For details on geolocation compound fields, see Compound Field Considerations and Limitations.
PaymentMethodLongitude	Type double Properties Filter, Nillable, Sort Description Longitude of the payment method address. Used with the PaymentMethodLatitude to specify the precise geolocation of the address. For details on geolocation compound fields, see Compound Field Considerations and Limitations.
PaymentMethodPostalCode	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description Part of the address for this payment method.
PaymentMethodState	Type string Properties Filter, Group, Nillable, Sort Description Payment method address details.
PaymentMethodStreet	Type textarea Properties Filter, Group, Nillable, Sort Description Payment method address details.
PaymentMethodSubType	Type string Properties Filter, Group, Nillable, Sort Description More information about the payment method. For example, if the PaymentMethodType is Visa, this field can be a digital wallet. This field is available in API version 57.0 and later.
PaymentMethodType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The payment method used for the transaction, such as Visa, Mastercard, EPS, SepaDebit, UnionPay, and Klarna. Method types can also be direct debit payments like ACH, Bacs, and BACS. This field is available in API version 57.0 and later.
SavedPaymentMethodId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the saved payment method record.

Field	Details
	Relationship Name SavedPaymentMethod Relationship Type Lookup Refers To SavedPaymentMethod
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The state of the payment method. Possible values are: • Active—The Payments platform can use the payment method to make payments. • Canceled—The Payments platform can no longer use the payment method to make payments. • InActive—The Payments platform currently can't use the payment method to make payments. Admins can change this value to Active when needed.

PymtSchdDistributionMethod

Indicates how the total payment is divided into partial payments. This object is available in API version 56.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description User-entered description of the payment schedule distribution method.
DistributionCount	Type int Properties Create, Filter, Group, Sort, Update Description The number of payment schedule items for the payment schedule. The payment schedule items are used to distribute the payment schedule's total payment into partial payments. Possible values are: 1—Full distribution. Currently, each payment schedule must have exactly one payment schedule item.
DistributionMethodType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Distribution method time interval. Possible values are: FullDistribution—The full amount on the payment schedule is distributed to a single payment schedule item. LumpSum—The specified payment amount on the payment schedule is distributed to a single payment schedule item. Available in API version 65.0 and later with Financial Services and Automotive Cloud. Monthly—The specified payment amount on the payment schedule is distributed evenly across multiple monthly payments. Available in API version 65.0 and later with Financial Services and Automotive Cloud. Quarterly—The specified payment amount on the payment schedule is distributed evenly across multiple quarterly payments. Available in API version 65.0 and later with Financial Services and Automotive Cloud. Weekly—The specified payment amount on the payment schedule is distributed evenly across multiple weekly payments.

Field	Details
	Available in API version 65.0 and later with Financial Services and Automotive Cloud.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description User-entered name for the payment schedule distribution method.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of this object. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

PaymentScheduleTreatmentDtl

Contains configuration information for the payment schedule treatment detail. This object is available in API version 56.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
DateOffset	Type int Properties Create, Filter, Group, Sort, Update Description A number equal to or less than 0. The date offset is subtracted from the processing date reference to determine the processing date. For example, suppose that the invoice due date is 01/17/2022 and offset is -7. In this case, the payment schedule item is processed by the jobs that run on or before 01/10/2022.
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description The user-entered description of the payment schedule treatment detail.
InstallmentPaymentType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Indicates how the payment amount is divided into multiple payments. Possible values are:

Field	Details
	Percentage
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
PaymentMethodSelectionType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Indicates how the payment method is specified. Possible values are: - Manual—the payment method is entered by a user - MostRecentAutopay—the payment method is the most recent automatic payment method used
PaymentRunMatchingValue	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Possible values are: - AMER - APAC - EMEA

Field	Details
PaymentScheduleTreatmentDetailNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description System-generated unique identifier for this payment schedule treatment detail.
PaymentScheduleTreatmentId	Type reference Properties Create, Filter, Group, Sort Description The ID of the related payment schedule treatment. This field is a relationship field. Relationship Name PaymentScheduleTreatment Relationship Type Lookup Refers To PaymentScheduleTreatment
Percentage	Type percent Properties Create, Filter, Nillable, Sort, Update Description Indicates the percentage of the source amount that is used to create the payment schedule.
ProcessingDateReference	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Indicates the source of the reference date. Possible values are: • InvoiceDueDate—use the invoice’s due date as the date reference • UserInputDate—User Input Date Available in API version 65.0 and later with Financial Services and Automotive Cloud.

Field	Details
PymtSchdDistributionMethodId	Type reference Properties Create, Filter, Group, Sort, Update Description The distribution method that contains the information on how to create the payment schedule items. This field is a relationship field. Relationship Name PymtSchdDistributionMethod Relationship Type Lookup Refers To PymtSchdDistributionMethod

PaymentTerm

Defines your company's method and expectations for receiving payment. This object is available in API version 55.0 and later.

Timely payment helps your company maintain cash flow. Payment terms are used to determine the payment due date on invoices. Use with the PaymentTermItem object.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description User-defined field that describes the payment term. For example, use <i>Net 30</i> to describe a payment term where the payment is due within 30 days of the billing date.
IsDefault	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this payment term is the default term for your org. A default payment term must be defined in your org. The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the payment term. For example, <i>Net 30</i> or <i>Cash on delivery (COD)</i>. This name appears on the invoice.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description Indicates whether the payment term is available for use on invoices. Possible values are: • Active—The payment term is available for use and can be applied to an order. Only active payment terms can be applied to transactions or orders. • Draft—The payment term exists but isn't activated yet. • Inactive—The payment term exists but can't be applied to new transactions or orders. The default value is Draft .

Usage

A payment term is applied to an order or transaction, and is passed on to the billing schedule that's used to generate the invoice. The due date on the invoice is derived from the payment.

For example, a Net 30 payment term means that the customer has 30 days to pay from the invoice date. Suppose that an invoice with a Net 30 payment term is generated on January 1. The invoice date is January 1, and the due date is January 31 (1 + 30 days = 31).

PaymentTermItem

Defines the attributes of a payment term that your company uses. The `PaymentTermItem` is used to determine the due date on invoices. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
Description	Type textarea

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description User-defined field that describes the details of the payment term item.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-generated sequential number, such as PTI-000001.
PaymentTermId	Type reference Properties Create, Filter, Group, Sort Description The ID of the payment term that this payment term item is associated with. This field is a relationship field. Relationship Name PaymentTerm Relationship Type Lookup Refers To PaymentTerm

Field	Details
PaymentTimeframe	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Indicates the time period when the payment is expected. Possible values are: • Standard—Indicates that payment is expected by the date specified in the payment term. If payment isn't received by the due date, the payment becomes overdue. The default value is Standard.
Period	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Specifies the number of units in the payment period. Used with the <code>PeriodUnit</code> field. For example, to define a payment term of Net 30, enter <i>30</i> as the <code>Period</code> and select <i>Days</i> as the <code>PeriodUnit</code>.
PeriodUnit	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the unit of time for the payment period. Used with the <code>Period</code> field. For example, to define a payment term of Net 30, enter <i>30</i> as the <code>Period</code> and select <i>Days</i> as the <code>PeriodUnit</code>. Possible values are: • Days
Type	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Specifies how the payment term and invoice due date are derived. Possible values are: • Period-Based—Tells the system to use the <code>Period</code> and <code>PeriodUnit</code> fields to calculate the invoice due date.

Field	Details
	The default value is <code>Period-Based</code> .

PaymentSchedule

The payment schedule represents a collection of payments that a customer wants to collect at different times for a certain record. A schedule contains one or more payment schedule items, where each item represents one payment to be processed. Each of a schedule's items can have different payment configuration fields, such as payment methods, payment dates, and payment accounts. When a payment scheduler launches a payment run, the run evaluates active payment schedule items, and picks them up for payment processing if they align with the scheduler's payment criteria. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
<code>AvailableRequestedAmount</code>	Type currency Properties Filter, Nillable, Sort Description The payment schedule's remaining amount available for the creation of payment schedule items. Equals <code>TotalRequestedAmount - TotalLineRequestedAmount</code> .
<code>Comments</code>	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Optional user-defined comments.

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Three-letter ISO 4217 currency code associated with the payment group record.
DefaultPaymentAccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description When a payment run creates payments from a payment schedule item, it sets the payment's account to the item's <code>PaymentAccountId</code>. Upon payment schedule item creation, the item's <code>PaymentAccountId</code> inherits the schedule's <code>DefaultPaymentAccountId</code>. However, you can override the <code>PaymentAccountId</code> with a different account as needed. If you do, future payments made from the item use the new account. This is a relationship field. Relationship Name DefaultPaymentAccount Relationship Type Lookup Refers To Account
DefaultPaymentMethodId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description When a payment run creates payments from a payment schedule ID, it sets the payment's account to the item's <code>PaymentMethodId</code>. Upon payment schedule item creation, the item's <code>PaymentMethodId</code> inherits the schedule's <code>DefaultPaymentMethodId</code>. However, you can override the <code>PaymentMethodId</code> with a different account as needed. If you do, future payments made from the item will use the new account. Relationship Name DefaultPaymentMethod Relationship Type Lookup Refers To CardPaymentMethod, DigitalWallet

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The user who created the payment schedule. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PaymentScheduleNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description System-generated reference number for the payment schedule.
PaymentScheduleTreatmentDt1Id	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The payment schedule treatment detail associated with the payment schedule record. This field is a relationship field. Available in API version 65.0 and later with Financial Services and Automotive Cloud. Relationship Name PaymentScheduleTreatmentDtl Refers To PaymentScheduleTreatmentDtl
PaymentSource	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Specifies the name of the funding source that is used to fulfill a payment commitment. Available in API version 63.0 and later with Financial Services and Automotive Cloud.
ReferenceEntityId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The object that receives payments as a result of payment schedule items processed from the payment schedule. This is a polymorphic relationship field. Relationship Name ReferenceEntity Relationship Type Lookup Refers To API version 55.0 and later: - Contract - Order - Invoice API version 62.0 and later with Financial Services and Automotive Cloud: CollectionPlan
RemainingAmountToBeProcessed	Type currency

Field	Details
	Properties Filter, Nillable, Sort Description The total pending amount of payment schedule items that haven't yet been processed for payment. Equals <code>TotalLineRequestedAmount - TotalProcessedAmount</code>.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The status of the payment schedule. Possible values are: • Accepted: The payment schedule is approved and is ready for payment run evaluation. Available in API version 65.0 and later with Financial Services and Automotive Cloud. • Approval Pending: The payment schedule needs approval. Available in API version 65.0 and later with Financial Services and Automotive Cloud. • Canceled: Payment runs can't evaluate payment schedules or use them to create payments. • Completed: All of the payment schedule's payment schedule items have been processed for payments. • Draft: The payment schedule can be edited and configured. Payment runs don't evaluate draft payment schedules. • On Hold: The payment schedule can't be considered for payment runs due to missing information, the need for additional review, or other unresolved external factors. Available in API version 65.0 and later with Financial Services and Automotive Cloud. • Open: The payment schedule is available for payment run evaluation. • Rejected: The payment schedule isn't approved and can't be considered for payment run evaluation. Available in API version 65.0 and later with Financial Services and Automotive Cloud.
TotalAppliedAmount	Type currency Properties Filter, Nillable, Sort Description The amount of all payment schedule items that have been applied to payments. This is a calculated field.

Field	Details
TotalCanceledAmount	Type currency Properties Filter, Nillable, Sort Description The sum of all RequestedAmount values on payment schedule items with a status of Canceled.
TotalPaymentsReceived	Type currency Properties Filter, Nillable, Sort Description The cumulative sum of payments received for all payment schedule items linked to a payment schedule. This field is a calculated field. Available in API version 63.0 and later with Financial Services and Automotive Cloud.
TotalPaymentScheduleItemAmount	Type currency Properties Filter, Nillable, Sort\ Description The total amount allocated from the payment schedule to its payment schedule items. Equals the sum of each payment schedule item's RequestedAmount – the sum of each payment schedule item's Canceled Amount.
TotalProcessedAmount	Type currency Properties Filter, Nillable, Sort Description The sum of ProcessedAmount values on payment schedule items with a status of Processed.
TotalRequestedAmount	Type currency Properties Create, Filter, Sort, Update

Field	Details
	Description The total amount available for a payment schedule to distribute to its payment schedule items. The sum of payment schedule items can't be greater than the <code>TotalLineRequestedAmount</code> of the parent payment schedule.
Type	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of payment for which the payment schedule is created. Available in API version 65.0 and later with Financial Services and Automotive Cloud. Possible values are: • <code>PaymentPlan</code>—Payment Plan • <code>PromiseToPay</code>—Promise to Pay
UsageType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the usage type for the record. Possible value is: • <code>CollectionPlan</code> Available in API version 62.0 and later with Financial Services and Automotive Cloud.

PaymentScheduleItem

A payment schedule contains one or more payment schedule items, where each item represents one payment to be processed. Each of a schedule's items can have different payment configuration fields, such as payment methods, payment dates, and payment accounts. When a payment scheduler launches a payment run, the run evaluates active payment schedule items, and picks them up for payment processing if they align with the scheduler's payment criteria. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
Comments	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Optional user-defined comments.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Three-letter ISO 4217 currency code associated with the payment schedule item record.
LastPaymentGatewayLogId	Type reference Properties Filter, Group, Nillable, Sort Description The most recent payment gateway log created following a payment gateway request to make a payment based on the payment schedule item. This is a relationship field. Relationship Name LastPaymentGatewayLog Relationship Type Lookup Refers To PaymentGatewayLog
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
PaymentAccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The account assigned to payments made from the payment schedule item. When a payment schedule item is created, its <code>PaymentAccountId</code> inherits the payment schedule's <code>DefaultPaymentAccountId</code> . However, you can provide a new <code>PaymentAccountId</code> at any time. If you change the <code>PaymentAccountId</code> , only payments made after the change use the new account. This is a relationship field. Relationship Name PaymentAccount Relationship Type Lookup Refers To Account
PaymentBatchRunId	Type reference Properties Filter, Group, Nillable, Sort Description The payment batch run that evaluated the payment schedule item for payment processing. This is a relationship field. Relationship Name PaymentBatchRun Relationship Type Lookup

Field	Details
	Refers To PaymentBatchRun
PaymentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The payment that a payment run created for the payment schedule item after picking up the parent payment schedule. This field is unique within your organization This is a relationship field. Relationship Name Payment Relationship Type Lookup Refers To Payment
PaymentMethodId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The payment method assigned to payments created from the payment schedule item. When a payment schedule item is created, its <code>PaymentMethodId</code> inherits the payment schedule's <code>DefaultPaymentMethodId</code>. However, you can provide a new <code>PaymentMethodId</code> at any time. If you change the <code>PaymentMethodId</code>, only payments made after the change use the new account. Relationship Name PaymentMethod Relationship Type Lookup Refers To CardPaymentMethod, DigitalWallet
PaymentProcessingMessage	Type string Properties Filter, Nillable, Sort Description Shows information about whether the payment creation process has completed.

Field	Details
PaymentsReceived	Type currency Properties Create, Filter, Nillable, Sort, Update Description The payment received from the borrower for the payment schedule item.
PaymentRunMatchingValue	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The value used to match a payment schedule item to a payment run based on the payment run's matching criteria.
PaymentScheduleId	Type reference Properties Create, Filter, Group, Sort Description The parent payment schedule for the payment schedule item. This is a relationship field. Relationship Name PaymentSchedule Relationship Type Lookup Refers To PaymentSchedule
PaymentScheduleItemNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description User-defined reference number for the payment schedule item.
PaymentSource	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description The feature that caused a payment to be created from the payment schedule item. Possible values are: • <code>PaymentRun</code>
<code>PaymentsReceived</code>	Type currency Properties Create, Filter, Nillable, Sort, Update Description The payment received from the borrower for the payment schedule item. Available in API version 63.0 and later with Financial Services and Automotive Cloud.
<code>ProcessedAmount</code>	Type currency Properties Filter, Nillable, Sort Description The amount of the payment schedule item that has been processed for payment and converted to a payment record.
<code>RequestedAmount</code>	Type currency Properties Create, Filter, Sort, Update Description The initial amount of the payment schedule item upon creation.
<code>Status</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The status of the payment schedule item. Possible values are: • <code>Applied</code>: The payment schedule item has been successfully applied. • <code>Apply Failed</code>: The payment run encountered an error when attempting to process the payment schedule item for payment. For more information, review the payment run's revenue transaction error log. • <code>Approval Pending</code>: The payment schedule item is waiting for approval before it can be processed by payment runs.

Field	Details
	Available in API version 65.0 and later with Financial Services and Automotive Cloud. • Canceled: The payment schedule item can't be picked up by payment runs for processing. When a user or process changes the item's status to Canceled, the item's <code>CanceledAmount</code> becomes <code>RequestedAmount - ProcessedAmount</code>. • Deferred Payment The payment schedule item has been postponed and will be processed at a later date. Available in API version 65.0 and later with Financial Services and Automotive Cloud. • Payment Waived Off The payment schedule item has been canceled, and the payment will not be processed. Available in API version 65.0 and later with Financial Services and Automotive Cloud.
TargetPaymentProcessingDate	Type date Properties Create, Filter, Group, Sort, Update Description The date after picking up a payment schedule item that the payment run makes a payment request to the payment gateway.
UsageType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the usage type for the record. Possible value is: • <code>CollectionPlan</code> Available in API version 62.0 and later with Financial Services and Automotive Cloud.

PaymentSchedulePolicy

Contains configuration information for the payment schedule policy. This object is available in API version 56.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available with Subscription Management and the PaymentScheduleAutomation permission, and Billing (Revenue Cloud). For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
DefaultTreatmentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The default payment schedule treatment. This field is a relationship field. Relationship Name DefaultTreatment Relationship Type Lookup Refers To PaymentScheduleTreatment
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description User-entered description of the payment schedule policy.
IsOrgDefault	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description <code>true</code> if the payment schedule policy is the default policy for the org, otherwise <code>false</code>. An org can have a maximum of one default payment policy. The default value is <code>false</code>.
LastReferencedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The user-entered name of the payment policy.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the creator of this object. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description The payment schedule policy's status. Possible values are: • Active • Canceled • Draft • Inactive
TreatmentSelection	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Indicates the payment schedule treatment. Possible values are: • Default—use the payment schedule treatment indicated by <code>DefaultTreatmentId</code>.

PaymentScheduleTreatment

Contains configuration information for the payment schedule. This object is available in API version 56.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
Description	Type textarea

Field	Details
	Properties Create, Filter, Nillable, Sort, Update Description The user-entered description of the payment schedule treatment.
IsApprovalRequired	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this payment schedule treatment requires approval or not. Available in API version 65.0 and later with Financial Services and Automotive Cloud. The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The user-entered name of the payment schedule treatment.
OwnerId	Type reference

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of this object. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PaymentPlanTag	Type textarea Properties Create, Filter, Nillable, Sort, Update Description A list of key annotations or insights about the payment plan, such as requires approval or recommended, to help guide the user in selecting the most suitable payment plan. Available in API version 65.0 and later with Financial Services and Automotive Cloud.
PaymentSchedulePolicyId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the related payment schedule policy. This field is a relationship field. Relationship Name PaymentSchedulePolicy Relationship Type Lookup Refers To PaymentSchedulePolicy
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The payment schedule treatment's status.

Field	Details
	Possible values are: • Active • Canceled • Draft • Inactive
TriggerSource	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Indicates the action that caused the payment schedule treatment to be created. Possible values are: • InvoicePosted—an invoice is posted • UserAction—User Action Available in API version 65.0 and later with Financial Services and Automotive Cloud.

PendingOrderSummary

Object representing a B2C Commerce order ingested via High Scale Orders before an OrderSummary is created for it. Optimized for online transaction processing (OLTP). This object is available in API version 55.0 and later.

Supported Calls

`describeLayout()`, `query()`

Special Access Rules

This object is only available in Salesforce Order Management orgs where the High Scale Orders feature is enabled.

Fields

Field	Details
AccountId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description ID of the account or person account associated with the PendingOrderSummary. It represents the shopper in the storefront. This field is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
BillToContactId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the Contact associated with the PendingOrderSummary. It represents the shopper in the storefront when not using person accounts. This field is a relationship field. Relationship Name BillToContact Relationship Type Lookup Refers To Contact
BillingEmailAddress	Type email Properties Filter, Group, Sort Description Email address on the billing address.
BillingPhoneNumber	Type phone Properties Filter, Group, Nillable, Sort Description Phone number of the billing address.

Field	Details
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for the currency of the original Order associated with the PendingOrderSummary. Possible values are: • DKK—Danish Krone • EUR—Euro • GBP—British Pound • USD—U.S. Dollar The default value is USD.
Description	Type string Properties Filter, Group, Nillable, Sort Description Description of the PendingOrderSummary.
ExternalId	Type string Properties Filter, Group, Nillable, Sort Description This field is used internally. This field isn't synced with ZOS, so you can't use it in a query or insert operation.
ExternalReferenceIdentifier	Type string Properties Filter, Group, Sort Description Used internally to prevent duplicate records. This value is case-sensitive. On creation, this value is set to <i>B2C realm ID + "_" + B2C instance ID + "@" + B2C Commerce catalog/domain ID + "@" + B2C Commerce order number</i>. When the OrderSummary is created, this value is copied to its ExternalReferenceIdentifier field. If you ingest orders from multiple sources, you can maintain uniqueness by including a prefix based on the source.

Field	Details
GrandTotalAmount	Type currency Properties Filter, Sort Description Total amount, including adjustments and tax, of the PendingOrderSummary.
OrderNumber	Type string Properties Filter, Group, Sort Description Name of the PendingOrderSummary.
OrderedDate	Type dateTime Properties Filter, Sort Description Date of the original order associated with this PendingOrderSummary.
Payload	Type textarea Properties Description The order data payload.
PayloadType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The datatype of the Payload. Possible values are: • JSON_GZIP • JSON_RAW
ProcessingInstructions	Type textarea Properties Nillable

Field	Details
	Description Instructions about how the HSOI service should create the order summary. Options include using the default without customizations or using a custom flow. Also includes instructions about how the HSOI service should dedupe account and contact information using platform duplication and matching rules or by using simple email methods.
SalesChannelId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the SalesChannel associated with this PendingOrderSummary. The SalesChannel Name matches the B2C Commerce catalog/domain ID. This field is a relationship field. Relationship Name SalesChannel Relationship Type Lookup Refers To SalesChannel
SalesStoreId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the RetailStore or WebStore associated with this PendingOrderSummary. This field is a relationship field. Relationship Name SalesStore Relationship Type Lookup Refers To WebStore
ShopperName	Type string Properties Filter, Group, Sort Description The first name and last name of the shopper that placed the original order.

Usage

If you need to view or service an ingested B2C Commerce order before the automated High Scale Orders process has created an OrderSummary for it, you can manually trigger creation of the OrderSummary. In Salesforce, open the PendingOrderSummaries list, find the record, and click **Import**.

PendingOrderSummary only supports certain methods and queries. It doesn't support Apex triggers.

Supported Apex Methods:

- `Database.query(queryString)`
- `Database.query(queryString, accessLevel)`

Supported SOAP API Methods:

- `create()`
- `delete()`
- `describeLayout()`
- `query()`
- `queryMore()`

Supported REST API Methods:

- `/services/data/vXX.X/objects/sObject/` GET
- `/services/data/vXX.X/objects/sObject/id/` GET
- `/services/data/vXX.X/objects/sObject/id/` DELETE
- `/services/data/vXX.X/objects/sObject/id/` POST
- `/services/data/vXX.X/objects/sObject/describe/compactLayouts/` GET
- `/services/data/vXX.X/objects/sObject/quickActions/` GET

Supported Queries:

convertCurrency() function

Example: `SELECT Id, convertCurrency(AnnualRevenue) FROM Account`

Child-to-Parent subquery

Example: `SELECT ExternalReferenceIdentifier, Account.Name FROM PendingOrderSummary WHERE ExternalReferenceIdentifier = 'a'`

Limit clause

Example: `SELECT ExternalReferenceIdentifier FROM PendingOrderSummary WHERE ExternalReferenceIdentifier = 'a' LIMIT 1`

Filter by index

Example: `SELECT ExternalReferenceIdentifier FROM PendingOrderSummary WHERE ExternalReferenceIdentifier = 'a'`

Filter by secondary index

Example: `SELECT ExternalReferenceIdentifier FROM PendingOrderSummary WHERE AccountId = 'xxx'`

ORDER BY clause

When using ORDER BY, you don't need to specify a direction. However, if you sort ASC, you can't use NULLS LAST. If you sort DESC, you can only use NULLS LAST.

```
Example: SELECT ExternalReferenceIdentifier FROM PendingOrderSummary ORDER BY ExternalReferenceIdentifier
```

```
Example: SELECT ExternalReferenceIdentifier FROM PendingOrderSummary ORDER BY ExternalReferenceIdentifier ASC NULLS FIRST
```

```
Example: SELECT ExternalReferenceIdentifier FROM PendingOrderSummary ORDER BY ExternalReferenceIdentifier DESC NULLS LAST
```

Equality filter

Range filters aren't supported.

```
Example: SELECT ExternalReferenceIdentifier FROM PendingOrderSummary WHERE ExternalReferenceIdentifier = 'realm_tenant@storesite@0000001'
```

```
Invalid example: SELECT ExternalReferenceIdentifier FROM PendingOrderSummary WHERE ExternalReferenceIdentifier < 'a'
```

SEE ALSO:

- [OrderSummary](#)
- [Order](#)

PendingServiceRouting

Represents the routing details of a work item that's waiting to be routed or assigned. This object is available in API version 40.0 and later.

Supported Calls

```
create(), delete(), describeObjects(), getDeleted(), getUpdated(), query(), retrieve(), undelete(), update(), upsert()
```

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.

Fields

Field	Details
BotId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the Enhanced Einstein Bot or AI agent that performed the work. This is a relationship field. This field is available in API version 52.0 and later. This field is a relationship field.

Field	Details
	Relationship Name Bot
	Relationship Type Lookup
	Refers To BotDefinition
BotType	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort
	Description Indicates the type of bot. Valid values are: • Bot. Refers to an Einstein bot. • ExternalCopilot. Refers to an AI agent with whom your customers can interact. The default value is Bot. This field is available in API version 63.0 and later.
CapacityPercentage	Type percent
	Properties Create, Filter, Nillable, Sort, Update
	Description Indicates the amount of work that this work item represents as a percentage. Valid values are from 0 to 100. Voice calls must have a capacity percentage of 100. If an agent receives a voice call, the agent won't receive new work items until the call ends, because at that point the agent's capacity will have reached 100%.
CapacityWeight	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description Indicates the amount of work that this work item represents as a whole number. Voice calls must use the entire capacity weight.
CustomRequestedDateTime	Type dateTime
	Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description Retains the datetime of this work item's initial request, so work items are rerouted using the datetime of the initial work request. When left blank, work items are rerouted using the datetime when they're rerouted.
DropAdditionalSkillsTimeout	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Time to wait before a skill marked as additional is dropped from Omni-Channel routing. The case is then routed to the best-matched agent even if they don't have all the skills. If CustomRequestedDateTime is set in the PendingServiceRouting object, DropAdditionalSkillsTimeout uses CustomRequestedDateTime as the start time. If CustomRequestedDateTime + DropAdditionalSkillsTimeout has already passed, Omni-Channel immediately drops the additional skills after the pending service request is created.
ExternalBotId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the third-party bot that handles the work item. This is a relationship field. This field is available in API version 64.0 and later. Relationship Name ExternalBot Relationship Type Lookup Refers To ExternalConversationBotDef
GroupId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the Omni-Channel queue.
IsInterruptible	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Indicates whether a work item consumes interruptible or primary capacity. The default value is <code>false</code>. Available in version 57.0 and later when the Interruptible Capacity feature is enabled.
<code>IsOwnerChangeInitiated</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a work item owner change triggered the direct assignment of this work item to the agent. The default value is <code>false</code>.
<code>IsPreferredUserRequired</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether this work item stays with the preferred user even when the user isn't available. The default value is <code>false</code>. This field is available in API version 50.0 and later. When a specific agent is required, don't set <code>PushTimeout</code>. These options aren't supported in this case.
<code>IsPushAttempted</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a push has been attempted. <code>true</code> if this work item was pushed to an agent at least one time and <code>false</code> otherwise.
<code>IsPushed</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this work item is pushed to an agent.
<code>IsReadyForRouting</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Indicates whether this work item is ready to be routed to an agent. If <code>true</code>, you can't edit this PendingServiceRouting record.
IsStatusChangeInitiated	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a work item status change triggered the direct assignment of this work item to the agent. The default value is <code>false</code>. This field is available in API version 50.0 and later.
IsTransfer	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this work item routing is a transfer request.
LastDeclinedAgentSession	Type string Properties Filter, Group, Nillable, Sort Description Chat session ID of the agent who last declined this work item.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the PendingServiceRouting record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of this PendingServiceRouting record.

Field	Details
PausedCapacityPercentage	Type percent Properties Create, Filter, Nillable, Sort, Update Description The percentage of capacity that's consumed when this work item is paused. The paused capacity feature is available with status-based capacity and Enhanced Omni-Channel only. This field is available in API version 62.0 and later.
PausedCapacityWeight	Type double Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description The amount of capacity that's consumed when this work item is paused. The paused capacity feature is available with status-based capacity and Enhanced Omni-Channel only. This field is available in API version 62.0 and later.
PreferredUserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the preferred user to handle the work item.
PushTimeout	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The time limit set for an agent to respond to an item before it's rerouted and the agent's status is changed accordingly. The time limit is measured in seconds. This field is available in API version 36.0 and later. Effective API version 57.0, for inbound Voice calls, this field represents the time limit set for an agent to respond to a call before it's declined. The value must be from 0 through 20. The value is capped at 20, so any number greater than that is treated as 20 seconds. Latency on the part of the telephony provider can result in agents having less than 20 seconds to answer a call before it's rerouted. When an agent attempts to answer a call within 20 seconds and finds that the call was rerouted, the agent's status remains unchanged. This scenario applies to these telephony models. • Service Cloud Voice with Amazon Connect • Service Cloud Voice with Partner Telephony from Amazon Connect

Field	Details
	When <code>IsPreferredUserRequired</code> is set to true, don't set this option. When a specific agent is required, this option isn't supported.
QueueId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the Omni-Channel queue. Due to API changes, <code>QueueId</code> is no longer recommended. Use <code>GroupId</code> instead.
RoutingModel	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Type of routing model. Possible values are: • <code>ExternalRouting</code> • <code>LeastActive</code> • <code>MostAvailable</code>
RoutingPriority	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Order in which work items are routed to agents. This field is considered with skills-based routing only. Queue-based routing sets a work item's priority from the routing configuration.
RoutingType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Indicates whether the work item is routed by queue or by skills-based routing. Possible values are: • <code>QueueBased</code> • <code>SkillsBased</code>

Field	Details
SecondaryRoutingPriority	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the secondary routing priority.
Serial	Type int Properties Filter, Group, Nillable, Sort Description Serial number of the PendingServiceRouting record. The serial number is automatically incremented each time the PendingServiceRouting record is modified.
ServiceChannelId	Type reference Properties Create, Filter, Group, Sort Description ID of the service channel.
TransferRequesterId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The user ID of the rep who reassigned the work using the Reassign action. This field is populated in reassigned AgentWork records only, not the original AgentWork record. This is a relationship field. This field is available in API version 63.0 and later. Relationship Name TransferRequester Relationship Type Lookup Refers To User
WorkItemId	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description ID of the work item. Refers To Custom objects and these standard objects: Account, Activity, Case, Claim, ClaimCoverage, ClaimRecovery, Contact, ContactRequest, CustomEntityData, Incident, Lead, LiveChatTranscript, MessagingSession, Opportunity, Orchestration Work Items, Order, Order, PaymentRequest, PersonTraining, Referral, SocialPost, SwarmMember, and VoiceCall. WorkOrder is available in version 58.0 and later.

Usage

When you use the PendingServiceRouting object for queue-based routing, the object doesn't invoke triggers before or after insert, or any action (trigger, workflow rule, validation) that could interfere with the creation of the record.

Associated Objects

This object has these associated objects. Unless noted, they're available in the same API version as this object.

PendingServiceRoutingChangeEvent (API version 62.0)

Change events are available for the object.

PendingServiceRoutingOwnerSharingRule

Sharing rules are available for the object.

PendingServiceRoutingShare

Sharing is available for the object.

Limits

You can view the number of Pending Service Routing records that are currently in use in your org, as well as the current hourly use rate. From Setup, enter *Omni-Channel* in the Quick Find box and select **Limits**. The Limits page also displays the current Pending Service Routing record usage percentage and the Pending Service Routing record limits for your org.

PendingServiceRoutingInteractionInfo

Represents PendingServiceRouting interaction information that's used when work is routed to an agent. For a screen pop, it specifies which records to open when work is routed to an agent from a specific channel. PendingServiceRoutingInteractionInfo is read-only. This object is available in API version 53.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled. To view this object, you must have the “Manage Flow” user permission.

Fields

Field	Details
IsFocused	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this record shows on the agent’s screen when multiple records open at the same time.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the PendingServiceRoutingInteractionInfo.
PendingServiceRoutingId	Type reference Properties Filter, Group, Sort Description The ID of the PendingServiceRouting on page 4109 from which the AgentWork on page 466 is created. This is a relationship field. Relationship Name PendingServiceRouting Relationship Type Lookup Refers To PendingServiceRouting
PrimaryRecordId	Type reference Properties Filter, Group, Sort

Field	Details
	Description The ID of the object that's routed to the agent through Omni-Channel.
	Relationship Name PrimaryRecord
	Relationship Type Lookup
TargetFlowName	Type string
	Properties Filter, Group, Nillable, Sort
	Description The API name and namespace prefix, if any, of the screen flow to open when work is routed to the agent. This field and the <code>TargetFlowId</code> field can't be populated at the same time. Available in API version 57.0 and later.
TargetObjectId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description The record to open when work is routed to the agent. This field is required in API version 56.0 and earlier. In API version 57.0 and later, this field is optional and can't be populated at the same time as the <code>TargetFlowName</code> field.
	Relationship Name TargetObject
	Relationship Type Lookup

Period

Represents a fiscal period defined in `FiscalYearSettings`.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

As of Spring '20 and later, only Chatter Free users and standard users can access this object.

Fields

Field	Details
EndDate	Type date Properties Filter, Group, Sort Description The last date of the fiscal period.
FiscalYearSettingsId	Type reference Properties Filter, Nillable, Group, Sort Description The parent record for this period. This is a relationship field. Relationship Name FiscalYearSettings Relationship Type Lookup Refers To FiscalYearSettings
FullyQualifiedLabel	Type string Properties Group, Nillable Description Represents the period's complete name in the UI. For example, "September FY 2016".
IsForecastPeriod	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the period is associated with Salesforce Forecasting (<code>true</code>) or not (<code>false</code>).
Number	Type int Properties Filter, Nillable, Group, Sort

Field	Details
	Description If the labeling scheme of your fiscal year's quarters or months is numbered, this field indicates the relative number of the row.
PeriodLabel	Type picklist Properties Filter, Group, Nillable, Sort Description If the months in your fiscal year use custom names, then this field contains the appropriate name for rows of type Month.
QuarterLabel	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Sort Description If the quarters in your fiscal year use custom names, then this field contains the appropriate name for rows of type Quarter.
StartDate	Type date Properties Filter, Group, Sort Description The first date of the fiscal period.
Type	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates whether the period is of type Month, Quarter, Week, or Year. Label is the field value.

Usage

In API version 36.0 and earlier, querying the Period object yields no results. In API version 37.0 and later, a query returns period records.

SEE ALSO:

[FiscalYearSettings](#)

PermissionSet

Represents a set of permissions that's used to grant more access to one or more users without changing their profile or reassigning profiles. This object is available in API version 22.0 and later.

PermissionSet has a read-only child relationship with PermissionSetGroup. PermissionSet contains the aggregated permissions for the group.

You can use permission sets to grant access, but not to deny access.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, only users who have one of these permissions can access this object:

- View Setup and Configuration
- Manage Session Permission Set Activations
- Assign Permission Sets
- Manage Profiles and Permission Sets

To view the following settings, assignments, and permissions for standard and custom objects in a specified permission set, the View Setup and Configuration permission is required.

- Client settings
- Field permissions
- Layout assignments
- Object permissions
- Permission dependencies
- Permission set tab settings
- Permission set group components
- Record types

Fields

Field Name	Details
Description	Type string Properties Create, Filter, Nillable, Group, Sort, Update Description A description of the permission set. Limit: 255 characters.

Field Name	Details
HasActivationRequired	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the permission set requires an associated active session (<code>true</code>) or not (<code>false</code>).
IsCustom	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, the permission set is custom (created by an admin); if <code>false</code>, the permission set is standard and related to a specific permission set license.
IsOwnedByProfile	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, the permission set is owned by a profile. Available in API version 25.0 and later.
Label	Type string Properties Create, Filter, Group, Sort, Update Description The permission set label, which corresponds to Label in the user interface. Limit: 80 characters.
LicenseId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of either the related PermissionSetLicense or UserLicense associated with this permission set. Available in API version 38.0 and later. Use this field instead of <code>UserLicenseId</code>, which is deprecated and only available up to API Version 37.0. This is a polymorphic relationship field. Relationship Name License

Field Name	Details
	Relationship Type Lookup Refers To PermissionSetLicense, UserLicense
Name	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your organization. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. Corresponds to API Name in the user interface. Limit: 80 characters.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix for a permission set that's been installed as part of a managed package. If the permission set isn't packaged or is part of an unmanaged package, this value is empty. Available in API version 23.0 and later.
Permissions PermissionName	Type boolean Properties Create, Filter, Update Description One field for each permission. If <code>true</code> , users assigned to this permission set have the named permission. The number of fields varies depending on the permissions for the organization and license type. To get a list of available permissions in the SOAP API, use <code>describeObjects()</code> .
PermissionSetGroupId	Type reference Properties Filter, Group, Nillable, Sort Description If the permission set is owned by a permission set group, this field returns the ID of the permission set group. If the permission set isn't owned by a permission set group, this field returns a null value. Available in API version 45.0 and later.

Field Name	Details
	This is a relationship field. Relationship Name PermissionSetGroup Relationship Type Lookup Refers To PermissionSetGroup
ProfileId	Type reference Properties Filter, Group, Nillable, Sort Description If the permission set is owned by a profile, this field returns the ID of the Profile. If the permission set isn't owned by a profile, this field returns a null value. Available in API version 25.0 and later. This is a relationship field. Relationship Name Profile Relationship Type Lookup Refers To Profile
Type	Type reference Properties Filter, Group, Nillable, Sort Description Available in API version 46.0 and later.
UserLicenseId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the UserLicense associated with this permission set. This field is nillable in API version 26.0 and later and available up to API version 37.0 In API version 38.0 and later, use <code>LicenseId</code>.

Usage

Use the PermissionSet object to query existing permission sets.

For example, to search for all permission sets that contain the “Modify All Data” permission:

```
SELECT Name, PermissionsModifyAllData
FROM PermissionSet
WHERE PermissionsModifyAllData=true
```

When combined with the PermissionSetAssignment object, you can create a nested query that returns all users assigned to a particular permission like “Modify All Data”:

```
SELECT Name, (SELECT AssigneeId FROM Assignments)
FROM PermissionSet
WHERE PermissionsModifyAllData=true
```

If the permission set isn’t assigned to a user, you can also create or delete a permission set.

User Licenses

The user license controls the permissions that are available in a permission set.

Every permission set can be associated with a user license or permission set license. If you plan to assign a permission set to multiple users with different user and permission set licenses, leave `LicenseId` empty. If only users with one type of license use this permission set, set the `LicenseId` to that single user or permission set license. If you want a permission set associated with a permission set license, then set `LicenseId` to the permission set license. To get the `LicenseId`, run this query:

```
SELECT Id, Name
FROM UserLicense
```

Alternatively, to query a user or profile for the `LicenseId`.

```
SELECT Id, Profile.UserLicenseId
FROM User
```

Child Objects

When using the API, think of each permission set or related set of access controls as an empty container that you fill with permission records.

In the API, a permission set can contain user, object, and field permissions, and setup entity access settings for other settings, such as Apex classes.

- ObjectPermissions and FieldPermissions objects are available in API version 24.0 and later.
- The SetupEntityAccess object is available in API version 25.0 and later.
- The PermissionSetGroupComponent object is available in API version 45 and later.

Only user permissions are managed in the PermissionSet API object; all other permission types are managed in child API objects.

In these child objects, access is stored in a record, while the absence of a record indicates no access. To return a record in a SOQL query, a minimum permission or setting is required for each child object.

Because permissions are stored in related objects, it’s important to understand what questions to ask when using SOQL. For example, let’s say you want to know which permission sets have “Delete” on an object. You also want to know which ones include permissions that allow approval of a return merchandise authorization (where the approval checkbox is controlled with field permissions). Asking

the right questions when using SOQL with permission sets ensures that you get the information you need, such as whether to migrate permissions or assign a permission set to a user.

For example, the following returns all permission sets where the “Read” permission is enabled for the Merchandise__c object.

```
SELECT SubjectType, ParentId, PermissionsRead
FROM ObjectPermissions
WHERE PermissionsRead = True AND SubjectType = 'Merchandise__c'
```

You can query for all permission sets that have “Read” on an object. However, you can’t query for permission sets that have no access on an object, because no records exist for that object. For example, the following returns no records because the object must have at least “Read” to return any records.

```
SELECT SubjectType, ParentId, PermissionsRead
FROM ObjectPermissions
WHERE PermissionsRead = False AND SubjectType = 'Merchandise__c'
```

If you have at least the “Read” permission on an object, you can create a conditional query on other permissions in the same object. For example, the following returns any records where the object has at least the “Read” permission but not the “Edit” permission.

```
SELECT ParentId, PermissionsRead, PermissionsEdit
FROM ObjectPermissions
WHERE PermissionsEdit = False AND SubjectType = 'Merchandise__c'
```

To set an object or field permission to no access, delete the record that contains the permission. For example, to disable all object permissions in the Merchandise__c object for a particular permission set, first query to retrieve the ID of the object permission record.

```
SELECT Id
FROM ObjectPermissions
WHERE SubjectType = 'Merchandise__c'
```

Then delete the IDs returned from the query.



Note: If you try to update the object or field permissions by setting all permissions to false, the permission record is automatically deleted. Any subsequent queries for the record ID won’t return results and you must add a new permission record to grant access.

View a Permission Set with Nested Queries

You can build on the PermissionSet object using child relationships that show all of the permissions in a single permission set. For example, the following returns all permission sets and displays the “Transfer Leads” permission, as well as any “Read” permissions on any objects and fields.

```
SELECT Label, PermissionsTransferAnyLead,
(SELECT SubjectType, PermissionsRead FROM ObjectPerms),
(SELECT SubjectType, Field, PermissionsRead FROM FieldPerms)
FROM PermissionSet
```

Associated Profiles

In API version 25.0 and later, every profile is associated with a permission set that stores the profile’s user, object, and field permissions, as well as setup entity access settings. You can query permission sets that are owned by profiles but not modify them.

The following example returns all permission sets, including those owned by a profile.

```
SELECT Id, Label, ProfileId, Profile.Name
FROM PermissionSet
```

The following returns all permission sets except those permissions owned by profiles.

```
SELECT Id, Label, ProfileId, Profile.Name, IsOwnedByProfile
FROM PermissionSet
WHERE IsOwnedByProfile = FALSE
```

Because permission sets have child objects in the API, you can query their values on permission sets owned by a profile. For example, the following returns all enabled object permission records for profiles only.

```
SELECT Id, ParentId, PermissionsRead, ObjectType, Parent.ProfileId
FROM ObjectPermissions
WHERE Parent.IsOwnedByProfile = TRUE
```

Once you have the IDs for permission sets that are owned and not owned by profiles, use the [PermissionSetAssignment](#) object to see if users can access objects or fields via their profile permissions or their permission sets. For example, the following SOQL query returns all users who have the “Read” permission on the Merchandise__c object. It also specifies whether the permission is granted through a profile or permission set.

```
SELECT Assignee.Name, PermissionSet.Id, PermissionSet.IsOwnedByProfile
FROM PermissionSetAssignment
WHERE PermissionSetId
IN (SELECT ParentId
FROM ObjectPermissions
WHERE SObjectType = 'Merchandise__c' AND PermissionsRead = true)
```



Note: For permission sets that are owned by profiles, don’t use Name and Label values that are returned in a query. Name and Label values from queries can change.

SEE ALSO:

[ObjectPermissions](#)
[FieldPermissions](#)
[SetupEntityAccess](#)
[PermissionSetAssignment](#)
[Profile](#)

PermissionSetAssignment

Represents a user’s assignment to a permission set or permission set group. This object is available in API version 22.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`

Special Access Rules

As of Summer ’20 and later, only users who have one of these permissions can access this object:

- View Setup and Configuration
- Assign Permission Sets
- Manage User

Fields

Field Name	Details
AssigneeId	Type reference Properties Create, Filter, Group, Sort Description The ID of the user that is assigned the permission set indicated in <code>PermissionSetId</code> or the permission set group indicated in <code>PermissionSetGroupId</code>. This is a relationship field. Relationship Name Assignee Relationship Type Lookup Refers To User
ExpirationDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date that the assignment of the permission set or permission set group expires for the specified user. This field is available in API version 52.0 and later.
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the assignment is active (<code>true</code>) or not (<code>false</code>). Defaults to <code>false</code>. This field is available in API version 52.0 and later.
IsRevoked	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the assignment was revoked (<code>true</code>) or not (<code>false</code>). Defaults to <code>false</code>. This field is available only if user access policies are enabled. This field is available in API version 57.0 and later.

Field Name	Details
LastCreatedByChangeId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user access change record related to this permission set or permission set group assignment. This field is available only if user access policies are enabled. This field is available in API version 57.0 and later. This field is a relationship field. Relationship Name LastCreatedByChange Relationship Type Lookup Refers To UserAccessChange
LastDeletedByChangeId	Type reference Properties Create, Filter, Group, Sort Description The ID of the user access change record related to this permission set or permission set group assignment being revoked. This field is available only if user access policies are enabled. This field is available in API version 57.0 and later. This field is a relationship field. Relationship Name LastCreatedByChange Relationship Type Lookup Refers To UserAccessChange
PermissionSetGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the permission set group assigned to the user specified in AssigneeId. This field is available in API version 45.0 and later. This is a relationship field.

Field Name	Details
	Relationship Name PermissionSetGroup Relationship Type Lookup Refers To PermissionSetGroup
PermissionSetId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the permission set assigned to the user specified in AssigneeId. This is a relationship field. Relationship Name PermissionSet Relationship Type Lookup Refers To PermissionSet

Usage

Finding Permission Set Assignments

Use the PermissionSetAssignment object to query permission set assignments to find out which permission sets are assigned to which users. Because each user can be assigned to many permission sets and each permission set can be assigned to many users, each PermissionSetAssignment ID represents the association of a single user and single permission set.

For example, to search for all permission sets assigned to a particular user:

```
SELECT Id, PermissionSetId
FROM PermissionSetAssignment
WHERE AssigneeId = '005600000017cKt'
```

To search for all users assigned to a particular permission set:

```
SELECT Id, AssigneeId
FROM PermissionSetAssignment
WHERE PermissionSetId = '0PS300000000000e'
```

You can also create a new permission set assignment, or use delete to remove a permission set that's assigned to a user. To update an assignment, delete an existing assignment and insert a new one.

User Licenses

When assigning a permission set, if the PermissionSet has a `UserLicenseId`, its `UserLicenseId` and the Profile `UserLicenseId` must match. To determine a user's license assignment, query the user's profile and then query the profile's license.

For example, to find a user's profile ID:

```
SELECT Id, ProfileId
FROM User
WHERE Id = '005D00000001GMAT'
```

To find a permission set's `UserLicenseId`:

```
SELECT Id, LicenseId
FROM PermissionSet
WHERE Id = '0PS30000000000e'
```

If the IDs match, the assignment succeeds.

To find all the permission sets with no license that are assigned to any user:

```
SELECT Id, Assignee.Name, PermissionSet.Name
FROM PermissionSetAssignment
WHERE PermissionSet.LicenseId = null
```

Revoked Assignments from User Access Policies

After you revoke a permission set or permission set group assignment via a user access policy, the `IsRevoked` field is updated to `true`. The `PermissionSetAssignment` record isn't deleted. If the permission set or permission set group is assigned to the user again, the `IsRevoked` field is then updated to `false`.

To find permission set or permission set group assignments that were revoked:

```
SELECT Id, ExpirationDate, Assignee.Name, PermissionSet.Name
FROM PermissionSetAssignment
WHERE IsRevoked=true ALL ROWS
```

SEE ALSO:

[PermissionSet](#)

PermissionSetGroup

Represents a group of permission sets and the permissions within them. Use permission set groups to organize permissions based on job functions or tasks. Then, you can package the groups as needed. This object is available in API version 45.0 and later.

Supported Calls

`create()`, `delete()`, `describeObject()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, to view this object, users must have one of these permissions:

- View Setup and Configuration

- Manage Session Permission Set Activations
- Assign Permission Sets

To edit this object, users must have the Manage Profiles and Permission Sets permission.

Fields

Field Name	Details
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The Permission Set Group description.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The permission set group name used in the API.
HasActivationRequired	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the permission set group requires an associated active session (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . This field is available in API version 53.0 and later.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The Permission Set Group language. Possible values are: • <code>da</code> (Danish) • <code>de</code> (German) • <code>en_US</code> (English) • <code>es</code> (Spanish) • <code>es_MX</code> (Spanish - Mexican)

Field Name	Details
	• <code>fi</code> (Finnish) • <code>fr</code> (French) • <code>it</code> (Italian) • <code>ja</code> (Japanese) • <code>ko</code> (Korean) • <code>nl_NL</code> (Dutch) • <code>no</code> (Norwegian) • <code>pt_BR</code> (Portuguese - Brazilian) • <code>ru</code> (Russian) • <code>sv</code> (Swedish) • <code>th</code> (Thai) • <code>zh_CN</code> (Chinese - Simplified) • <code>zh_TW</code> (Chinese - Traditional)
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The permission set group label for the aggregated permissions.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The permission set group namespace prefix.
Status	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Indicates permission set group recalculation status. • <code>Updated</code>. The group is current. • <code>Outdated</code>. The group requires recalculation. • <code>Updating</code>. The group is in recalculation mode. • <code>Failed</code>. The group recalculation failed.

Usage

Use the PermissionSetGroup object to query existing permission set groups and to find which aggregated permissions are included in the group.

For example, to search for all object permissions in a permission set group named StandardAccountingUsers:

```
SELECT SObjectType
FROM ObjectPermissions
WHERE Parent.PermissionSetGroup.DeveloperName = 'StandardAccountingUsers'
```

To create a permission set group using REST API, you can submit a POST request.

```
POST
/services/data/v45.0/tooling/objects/PermissionSetGroup/

{
  "DeveloperName": "Sales", "MasterLabel": "sales_label"
}
```

PermissionSetGroupComponent

A junction object that relates the PermissionSetGroup and PermissionSet objects via their respective IDs; enables permission set group recalculation to determine the aggregated permissions for the group. This object is available in API version 45.0 and later.

PermissionSetGroupComponent is a child object of PermissionSet and PermissionSetGroup.

Supported Calls

create(), delete(), describeObject(), query(), retrieve()

Special Access Rules

As of Spring '20 and later, only users with the "View Setup and Configuration" permission can access this object.

Fields

Field Name	Details
PermissionSetGroupId	Type reference Properties Create, Filter, Group, Sort Description The unique permission set group ID. This is a relationship field. Relationship Name PermissionSetGroup

Field Name	Details
	Relationship Type Lookup
	Refers To PermissionSetGroup
PermissionSetId	Type reference
	Properties Create, Filter, Group, Sort
	Description The unique permission set ID of a permission set in a permission set group. This is a relationship field.
	Relationship Name PermissionSet
	Relationship Type Lookup
	Refers To PermissionSet

Usage

Use the PermissionSetGroupComponent object to add members to or delete members from a permission set group, or to query for group members.

PermissionSetLicense

Represents a license that's used to enable one or more users to receive a specified permission without changing their profile or reassigning profiles. You can use permission set licenses to grant access, but not to deny access. This object is available in API version 29.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

As of Spring '20 and later, only your Salesforce org's internal users can access this object.

Fields

Field Name	Details
DeveloperName	Type string Properties Filter, Group, Sort Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
ExpirationDate	Type date Properties Filter, Group, Nillable, Sort Description The date at which the permission set license expires.
IsAvailableForIntegrations	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the permission set license is enabled for integrations (<code>true</code>) or not (<code>false</code>). When this field is set to <code>true</code>, Salesforce integration features can access data. The default value is <code>false</code>. This field is read-only in the API and can be edited only in Setup. If integrations are required for feature functionality and the license isn't enabled for integrations, you receive an error when setting up the session-based permission set or executing the feature. Only enable integrations if necessary for the feature.
IsSupplementLicense (Developer Preview)	Type boolean

Field Name	Details
	Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a custom permission set license is a supplement license (<code>true</code>) or a foundation license (<code>false</code>). The default value is <code>false</code>. This field is only available if the Partner Licensing Platform developer preview is enabled. This field is available in API version 55.0 and later.  Note: The Partner Licensing Platform is available as a developer preview. The Partner Licensing Platform isn't generally available unless or until Salesforce announces its general availability in documentation or in press releases or public statements. All commands, parameters, and other features are subject to change or deprecation at any time, with or without notice. Don't implement functionality developed with these commands or tools in your production package.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language of the permission set license.
MasterLabel	Type string Properties Filter, Group, Sort Description The label of the permission set license. Label is Permission Set License Label.
MaximumPermissions <i>PermissionName</i>	Type boolean Properties Filter Description One field for each permission. For example, <code>MaximumPermissionsIdentityConnect</code> corresponds to the "Use Identity Connect" permission. If <code>true</code>, this <code>PermissionSetLicense</code> grants the specified permission. The number of fields varies depending on the permissions available for the organization.
PermissionSetLicenseKey	Type string

Field Name	Details
	Properties Filter, Group, idLookup, Sort Description A string that uniquely identifies a particular permission set license.
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The status of a permission set license. If Active , the permission set license is available. If Disabled , the permission set license has expired.
TotalLicenses	Type int Properties Filter, Group, Sort Description The total number of this permission set license that are available to your organization.
UsedLicenses	Type int Properties Filter, Group, Sort Description The number of this permission set license that are currently assigned to users.

Usage

Users with the “View Setup and Configuration” permission can use the PermissionSetLicense object to view the set of currently defined permission set licenses in your organization.

Use the PermissionSetLicense object to query existing permission licenses.

For example, to return a list of all active permission set licenses:

```
SELECT MasterLabel
FROM PermissionSetLicense
WHERE Status = 'Active'
```

When combined with the PermissionSetLicenseAssign object, you can create a nested query that returns all users assigned to a particular permission set license like “Identity Connect”:

```
SELECT MasterLabel, (SELECT AssigneeId FROM PermissionSetLicenseAssign)
FROM PermissionSetLicense
WHERE MaximumPermissionsIdentityConnect=true
```

SEE ALSO:

[PermissionSetLicenseAssign](#)

PermissionSetLicenseAssign

Represents the association between a User and a PermissionSetLicense. This object is available in API version 29.0 and later.



Note: The relationship name for PermissionSetLicenseAssign is *PermissionSetLicenseAssignments*.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`

Special Access Rules

As of Summer '20 and later, only users who have one of these permissions can access this object:

- View Setup and Configuration
- Assign Permission Sets

Fields

Field Name	Details
AssigneeId	Type reference Properties Create, Filter, Group, Sort Description ID of the User to assign the permission set license specified in <code>PermissionSetLicenseId</code>. This is a relationship field. Relationship Name Assignee Relationship Type Lookup Refers To User

Field Name	Details
IsRevoked	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description Reserved for internal use. This field is available in API version 58.0 and later.
LastCreatedByChangeId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the user access change record related to this permission set license assignment. This field is available only if user access policies are enabled. This field is available in API version 58.0 and later. This field is a relationship field. Relationship Name LastCreatedByChange Relationship Type Lookup Refers To UserAccessChange
LastDeletedByChangeId	Type reference Properties Create, Filter, Group, Sort Description ID of the user access change record related to this permission set license assignment being revoked. This field is available only if user access policies are enabled. This field is available in API version 58.0 and later. This field is a relationship field. Relationship Name LastCreatedByChange Relationship Type Lookup Refers To UserAccessChange
PermissionSetLicenseId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Sort
	Description The ID of the permission set license the user is assigned to. This is a relationship field.
	Relationship Name PermissionSetLicense
	Relationship Type Lookup
	Refers To PermissionSetLicense

Usage

Use the PermissionSetLicenseAssign object for querying permission set license assignments to find out which permission set licenses are assigned to which users. Because each user can be assigned to many permission set licenses, each PermissionSetLicenseAssign ID represents the association of a single user and single permission set license.

For example, to search for all of the permission sets assigned to a particular user:

```
SELECT Id, PermissionSetLicenseId
FROM PermissionSetLicenseAssign
WHERE AssigneeId = '005D0000001RFek'
```

To search for all users assigned to a particular permission set license:

```
SELECT AssigneeId
FROM PermissionSetLicenseAssign
WHERE PermissionSetLicenseId = '0PLD000000003mwOAA'
```

You can also create a new permission set license assignment, or use delete to remove a permission set license that's been assigned to a user. To update an assignment, delete an existing assignment and insert a new one.

SEE ALSO:

[PermissionSetLicense](#)

PermissionSetLicenseDefinition (Developer Preview)

Represents the definition of a custom permission set license, which entitles specified features in a package. This object is available in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access `PermissionSetLicenseDefinition`, you must have the Partner Licensing Platform developer preview enabled. To participate in this developer preview, submit a participation request via the [Partner Licensing Platform Developer Preview](#) Partner Community group.

 **Note:** The Partner Licensing Platform is available as a developer preview. The Partner Licensing Platform isn't generally available unless or until Salesforce announces its general availability in documentation or in press releases or public statements. All commands, parameters, and other features are subject to change or deprecation at any time, with or without notice. Don't implement functionality developed with these commands or tools in your production package.

Fields

Field	Details
<code>DeveloperName</code>	Type string Properties Create, Filter, Group, Sort, Update Description Required. The unique name of the object in the API. This name can contain only underscores and alphanumeric characters and must be unique in your organization. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
<code>IsSupplementLicense</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the custom permission set license is a supplement license (<code>true</code>) or a foundation license (<code>false</code>). The default value is <code>false</code>. This field is available in API version 55.0 and later.
<code>Language</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The two- to five-character code that represents the language and locale ISO. This code controls the language for labels displayed in an application.

Field	Details
LicenseExpirationPolicy	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The license expiration policy of the custom permission set license. Possible values are: • BlockNamespaceAccess—Package access is blocked for existing users when all custom permission set licenses expire. This is the default value. • AllowNamespaceAccess—Package access isn't blocked for existing users when all custom permission set licenses expire. This field is available in API version 55.0 and later.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Label for this PermissionSetLicenseDefinition value. This display value is the internal label that does not get translated.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, NamespacePrefix is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, NamespacePrefix is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
UserLicenseRestrictions	Type textarea

Field	Details
	Properties Create, Nillable, Update Description The user license categories that can be assigned the custom permission set license. If no user license categories are specified, all users can be assigned the license. Possible values include: • <code>\${communities}</code> • <code>\${communitiesLogin}</code> • <code>\${customerCommunities}</code> • <code>\${customerCommunitiesLogin}</code> • <code>\${internal}</code> • <code>\${partnerCommunity}</code> • <code>\${partnerCommunityLogin}</code> • <code>\${platform}</code> For more information, see User License Restriction Categories (Developer Preview). This field is available in API version 55.0 and later.

Usage

After the `PermissionSetLicenseDefinition` is created, it must be referenced in `LicenseDefinitonCustomPermission`.

For more information, see the [Partner Licensing Platform Developer Guide \(Developer Preview\)](#).

PermissionSetTabSetting

Represents a permission set tab setting. Requires the View Setup permission. Use this object to query all tab settings of the permission set. This object is available in API version 45.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only users with "View Setup and Configuration" permission can access this object.

Fields

Field Name	Details
Name	Type string Properties Create, Filter, Group, Sort Description The tab name.
ParentId	Type reference Properties Create, Filter, Group, Sort Description The permission set Id. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To PermissionSet
Visibility	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Indicates whether the tab is visible by default. Possible values are: • DefaultOff • DefaultOn

Usage

Use the PermissionSetTabSetting object to find tab setting visibility settings, parent permission sets, and so forth.

For example, to find the visibility setting of a tab named “standard-Lead,” do something like the following.

```
SELECT Visibility
FROM PermissionSetTabSetting
WHERE Name = 'standard-Lead'
```


PersnlBatchDecision

Represents a batch personalization that delivers personalization decisions (content or recommendations) to a customer segment. Available in API version 64.0 and later.

Supported Calls

describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve()

Fields

Field	Details
ActivationTriggerType	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Type of trigger that activates the batch personalization decision. The default value is <code>None</code> and possible values are: • <code>Automatic</code>—Automatically On Job Completion • <code>None</code>
BatchStatus	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Status of the batch personalization decision. The default value is <code>Active</code> and possible values are: • <code>Active</code> • <code>Error</code> • <code>Paused</code>
DataSpaceId	Type reference Properties Filter, Group, Sort Description The ID of the data space from where batch personalization decision resources originate. Relationship Name DataSpace

Field	Details
	Refers To DataSpace
Description	Type string Properties Filter, Group, Nillable, Sort Description Text description of the batch personalization decision.
DeveloperName	Type string Properties Filter, Group, Nillable, Sort Description The unique name of the batch personalization decision in the API.
ErrorCode	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The issue that's causing an error. The default value is <code>None</code> and possible values are: • <code>ConfigurationMissingError</code>—A required configuration setting is missing. • <code>DpcJobError</code>—A problem occurred during processing. • <code>Internal Error</code>—An internal error occurred during processing. • <code>ModelValidationError</code>—The model is invalid. • <code>None</code>
RefreshMode	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description How the batch personalization data is refreshed. The default value is <code>FULL_REFRESH</code> and possible values are: • <code>FULL_REFRESH</code>—Generates new decisions for all members in a segment. • <code>INCREMENTAL</code>—Generates decisions only for the new members added to the segment after the last run.

Field	Details
Name	Type string Properties Filter, Group, idLookup, Sort Description Required. The name of the batch personalization decision.

Usage

PersnlBatchDecision provides details about refresh modes, model versions, and refresh states for specific market segments.

PersonAccountOwnerPowerUser

Represents a user who can own more than 50,000 customer or partner portal accounts. Person account owner power users can own a large number of either customer or partner users. Their role can't be changed and they must be at the root of the role hierarchy. Person account owner power user objects can't be created if deferred sharing is turned on for your org. Person account owner power user objects can be created while deferred sharing is turned off for an org. Deferred sharing can be turned back on after person account owner power user objects have been created. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Create a PersonAccountOwnerPowerUser object. Enter the user ID of the power user and the type of users that they can own, `Customer Portal` or `Partner`.

 **Note:** Only users at the highest level of a hierarchy can be added to the PersonAccountOwnerPowerUser object.

Fields

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API.

Field	Details
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language that the user's account is set to. The user is specified using the <code>UserId</code> field. See Salesforce Help for a full list of languages.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The label entered when the person account owner power user is created.
PortalType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The type of portal user account that the person account owner power user can own. A possible value is: • <code>CustomerPortal</code>—Customer Portal
UserId	Type reference Properties Create, Filter, Group, Sort Description The unique ID associated with the person account owner power user. This field is a relationship field. Relationship Name User Relationship Type Lookup Refers To User

PersonalOrgInfo

Represents the information for a Tableau Next personal org. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

To access this object, you must have Tableau Next enabled in your org and a Tableau Next permission set.

Fields

Field	Details
DeletedBy	Type string Properties Filter, Group, Nillable, Sort Description The user ID that deleted the personal org.
DeletedDate	Type date Properties Filter, Group, Nillable, Sort Description The date the personal org was deleted.
Description	Type textarea Properties Create, Nillable Description The description for the personal org.
Details	Type string Properties Create, Filter, Group, Nillable, Sort

Field	Details
	Description The details for the personal org.
ErrorCode	Type string Properties Filter, Group, Nillable, Sort Description The error code for the personal org.
IsPersonalOrgDeleted	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the personal org is deleted (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the personal org was last referenced.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the personal org was last viewed.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The API name of the personal org.
OrgName	Type string

Field	Details
	Properties Create, Filter, Group, Sort, Update Description The name of the personal org.
PersonalOrg	Type string Properties Filter, Group, Nillable, Sort Description The ID of the personal org.
PrimaryOrgUser	Type string Properties Create, Filter, Group, Sort, Update Description The email for the primary user of the personal org.
PrimaryOrgUserIdentifier	Type string Properties Filter, Group, Sort Description The user ID for the primary user of the personal org.
SignupCountry	Type string Properties Filter, Group, Sort Description The country of the personal org signup.
SignupEmail	Type email Properties Filter, Group, Sort Description The user email used for personal org signup.
SignupInstance	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The Salesforce org instance used for personal org signup.
SignupLanguage	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language used for personal org setup. Possible values are: • da—Danish • de—German • en_US—English • es—Spanish • es_MX—Spanish (Mexico) • fi—Finnish • fr—French • it—Italian • ja—Japanese • ko—Korean • nl_NL—Dutch • no—Norwegian • pt_BR—Portuguese (Brazil) • ru—Russian • sv—Swedish • th—Thai • zh_CN—Chinese (Simplified) • zh_TW—Chinese (Traditional)
SignupUsername	Type string Properties Filter, Group, Sort Description The user name used for personal org signup.
SourceType	Type picklist

Field	Details
	Properties Create, Filter, Group, Restricted picklist, Sort Description The source of the personal org. Possible values are: • TableauEinstein—Tableau Next
Status	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The status of the personal org. Possible values are: • Active • Creating • Deleted • Error • New The default value is New.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PersonalOrgInfoFeed on page 55

Feed tracking is available for the object.

PersonalOrgInfoHistory on page 63

History is available for tracked fields of the object.

PersonalizationDecision

Represents a set of targeting rules within a personalization point that determine an individual's eligibility to receive personalized content and the content to deliver. Available in API version 62.0 and later.

Supported Calls

describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve()

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Three letter ISO currency codes for supported currencies. The default value is USD. This is an optional field.
DataSetId	Type reference Properties Filter, Group, Sort Description Unique identifier that refers to the data space from where a personalization decision's resources originate. This is a required field. Relationship Name DataSet Refers To DataSet
Description	Type String Properties Filter, Group, Nillable, Sort Description Text description of the personalization decision. This is an optional field.
DeveloperName	Type string Properties Filter, Group, Nillable, Sort Description System or user-generated API name for the personalization decision. This is a required field.
Name	Type string Properties Filter, Group, idLookup, Sort

Field	Details
	Description The text label that identifies the personalization decision.
PersonalizationPointId	Type reference Properties Filter, Group, Sort Description Unique identifier that refers to a personalization point. Relationship Name PersonalizationPoint Relationship Type Primary-detail Refers To PersonalizationPoint (the primary object)
PersonalizerId	Type reference Properties Filter, Group, Nillable, Sort Description Unique identifier that refers to the personalizer service called at runtime, which retrieves the necessary information for a decision response. Relationship Name Personalizer Refers To PersonalizationRecommender
Priority	Type int Properties Filter, Group, Nillable, Sort Description Represents the order in which personalization decisions are evaluated. If an individual qualifies for multiple decisions, the one with the highest priority is returned. The possible values are positive integers such as 1, 2, and 3.
State	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description Picklist value that indicates the state of the decision. The default value is <code>Draft</code> , and accepted values are <code>Draft</code> and <code>Live</code> . Personalization evaluates only live decisions.

Usage

Use this object for defining and managing personalized responses. It includes targeting rules to determine eligibility and specifies the content to return, such as product recommendations.

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PersonalizationDecisionChangeEvent

Change events are available for the object.

PersonalizationDecisionFeed

Feed tracking is available for the object.

PersonalizationDecisionHistory

History is available for tracked fields of the object.

PersonalizationDecisionOwnerSharingRule

Sharing rules are available for the object.

PersonalizationDecisionShare

Sharing is available for the object.

PersonalizationObjective

Represents a specific business outcome that you want to achieve when creating a recommender. Available in API version 62.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
<code>CurrencyIsoCode</code>	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort

Field	Details
	Description Three letter ISO currency codes for supported currencies. The default value is USD. This is an optional field.
DataSpaceId	Type reference Properties Filter, Group, Sort Description Unique identifier that refers to the data space where an objective's resources originate. This is a required field. Relationship Name DataSource Refers To DataSource
Description	Type String Properties Filter, Group, Nillable, Sort Description Text description of the personalization objective. This is an optional field.
DeveloperName	Type string Properties Filter, Group, Nillable, Sort Description System or user-generated API name for the personalization objective. This is a required field.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp that indicates the last time the personalized objective was referenced by another resource.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description Timestamp that indicates the last time a user viewed the personalization objective.
Name	Type string Properties Filter, Group, idLookup, Sort Description The text label that identifies the personalization objective.

Usage

Use this object to define a business objective. The personalized, targeted recommendations generated using deep learning algorithms are intended to help achieve this objective. For example, the objective “maximizing revenue” can return recommendations that aim to increase checkout frequency, increase cart value at checkout, or both.

Associated Objects

This object has these associated objects. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

[PersonalizationObjectiveChangeEvent](#)

Change events are available for the object.

[PersonalizationObjectiveFeed](#)

Feed tracking is available for the object.

[PersonalizationObjectiveHistory](#)

History is available for tracked fields of the object.

[PersonalizationObjectiveOwnerSharingRule](#)

Sharing rules are available for the object.

[PersonalizationObjectiveShare](#)

Sharing is available for the object.

PersonalizationPoint

Represents a specific touch point in an experience where a personalization decision can be made. It connects a data space, profile data graph, personalization type, and response template to deliver personalized content at that time in a customer journey. Available in API version 62.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
AbnExperimentId	Type reference Properties Filter, Group, Nillable, Sort Description Unique identifier that refers to a related experiment. Relationship Name AbnExperiment Refers To AbnExperiment
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Three letter ISO currency codes for supported currencies. The default value is USD. This is an optional field.
DataSpaceId	Type reference Properties Filter, Group, Sort Description Unique identifier that refers to the data space where a personalization point's resources originate. This is a required field. Relationship Name DataSpace Refers To DataSpace
Description	Type String Properties Filter, Group, Nillable, Sort Description Text description of the personalization point. This is an optional field.

Field	Details
DeveloperName	Type string Properties Filter, Group, Nillable, Sort Description System or user-generated API name for the personalization point. This is a required field.
IsAuthenticationRequired	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the personalization point must use authenticated endpoints for real-time data capture and recommendation requests. When set to <code>true</code>, all interactions with Data Cloud are secured and verified. The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp that indicates the last time the personalized point was referenced by another resource.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp that indicates the last time a user viewed the personalization point.
MaxItemsCount	Type int Properties Filter, Group, Nillable, Sort Description Indicates the maximum number of recommendations to return.
Name	Type string

Field	Details
	Properties Filter, Group, idLookup, Sort Description The text label that identifies the personalization point.
PersonalizationSchemaEnum	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Picklist value that indicates the type of personalization schema, which is related to where a personalization decision is created. The accepted values are - DecisionDefined - ExperienceVariation - FlowPath
PersonalizationSchemaId	Type reference Properties Filter, Group, Nillable, Sort Description Unique identifier that refers to the schema that's related to the personalization point. Relationship Name PersonalizationSchema Refers To PersonalizationSchema
ProfileDataGraphId	Type reference Properties Filter, Group, Sort Description Unique identifier that refers to the profile data graph that's used with the personalization point. Relationship Name ProfileDataGraph Refers To DataGraph
RootPersonalizationPoint	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description Indicates the personalization point from where data is gathered.
Source	Type string Properties Filter, Group, Nillable, Sort Description Indicates the personalization point from where data is gathered.
SourceRecordId	Type reference Properties Filter, Group, Nillable, Sort Description Unique identifier that refers to the specific record that contains the personalization point. Relationship Name SourceRecord Refers To FlowRecordElement, ManagedContent
Status	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Indicates the state of the personalization point. The default value is <code>Processing</code>, and the accepted values are: • Active • CreateError—Error • DeleteError—Error • Deleting • EditError—Error • Processing

Usage

Use this object to define a specific touch point in an experience where personalization decisions can be made. For example, a personalization point can be an banner on a webpage. After setting up data space, profile data graph, personalization type, and schema, you can add decisions and targeting rules to the personalization point to tailor the user experience.

Associated Objects

This object has the following associated objects. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

PersonalizationPointChangeEvent

Change events are available for the object.

PersonalizationPointFeed

Feed tracking is available for the object.

PersonalizationPointHistory

History is available for tracked fields of the object.

PersonalizationPointOwnerSharingRule

Sharing rules are available for the object.

PersonalizationPointShare

Sharing is available for the object.

PersonalizationSchema

Represents a personalization response template that’s used when you build a personalization decision. Available in API version 62.0 and later.

Supported Calls

describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve()

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Three letter ISO currency codes for supported currencies. The default value is USD. This is an optional field.
DataSetId	Type reference

Field	Details
	Properties Filter, Group, Sort Description Unique identifier that refers to the data space where a response template's resources originate. This is a required field. Relationship Name DataSpace Refers To DataSpace
Description	Type String Properties Filter, Group, Nillable, Sort Description Text description of the response template. This is an optional field.
DeveloperName	Type string Properties Filter, Group, Nillable, Sort Description System or user-generated API name for the personalization response template. This is a required field.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp that indicates the last time the personalized response template was referenced by another resource.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp that indicates the last time a user viewed the response template.
Name	Type string

Field	Details
	Properties Filter, Group, idLookup, Sort
	Description The text label that identifies the personalization response template.
PersonalizationType	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description Indicates the kind of personalization content to present. The default value is Recommendations, and the accepted values are ManualContent and Recommendations.

Usage

A response template outlines the attributes that marketers use to configure the personalization response. It defines an expected format and shape for all decision response data.

- For a recommendation-focused personalization, the response template can include an optional placeholder attribute to include header text before a set of recommendations.
- For a manual content personalization, the response template can include placeholders for background images, links, call-to-action text, and so on.

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[PersonalizationSchemaChangeEvent](#)

Change events are available for the object.

[PersonalizationSchemaFeed](#)

Feed tracking is available for the object.

[PersonalizationSchemaHistory](#)

History is available for tracked fields of the object.

[PersonalizationSchemaOwnerSharingRule](#)

Sharing rules are available for the object.

[PersonalizationSchemaShare](#)

Sharing is available for the object.

PersonalizationTargetInfo

Represents a target for an audience. This object is available in API version 47.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
ContainerId	Type reference Properties Filter, Group, Sort Description ID of the Experience Cloud site or org that contains the target.
DraftRowId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the draft PersonalizationTargetInfo.
GroupName	Type string Properties Filter, Group, Sort Description Group name of the target. Groups bundle related targets. You can have up to 2,000 groups and 500 targets per group.
PublishStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Publish status of the target. Possible values are: • Draft • Live
TargetType	Type picklist

Field	Details
	Properties Filter, Group, Restricted picklist, Sort Description The type of the target. Possible values are: • ExperienceVariation • NavigationLinkSet • Topic • CollaborationGroup • KnowledgeArticle • ContentDocument • ManagedContent • Report • Dashboard • Custom objects You can have up to 2,500 ExperienceVariation targets and 25,000 record targets.
TargetValue	Type string Properties Filter, Group, Sort Description Value of the target. For ExperienceVariation, this is the developer name of the Experience Variation or the record ID for the object.

PermissionUpdateEventLog

Permission update events represent changes to object, field, and user permissions and setup entity access that occur in profiles and permission sets. The event type also tracks if you clone profiles or change whether session activation is required in permission sets or permission set groups. This object is available in API version 65.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
Context	Type string Properties Filter, Group, Nillable, Sort Description The context for what is happening for this update.
Description	Type string Properties Filter, Group, Nillable, Sort Description A description of the update that occurred in the profile, permission set, or permission set group.
FeatureIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the feature, such as a profile, permission set, or permission set group, that was updated.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.
PermissionType	Type string Properties Filter, Group, Nillable, Sort Description The type of permission, such as user, object, or field, or setup entity access, such as tab settings or Apex class access, that was updated.

Field	Details
RequestIdIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT.
UpdateType	Type string Properties Filter, Group, Nillable, Sort Description For object permissions, user permissions, and setup entity access, the type of update that occurred. For example, a permission was updated or deleted. For other changes in profiles, permission sets, or permission set groups, this information is tracked in the DESCRIPTION field.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who made the permission update.

PersonTraining

Represents an assignment of a learning module in Workforce Engagement. This object is available in API version 54.0 and later.

Supported Calls

```
create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), undelete(), update(), upsert()
```

Special Access Rules

The org requires a Workforce Engagement license and an Enablement Sites (myTrailhead) license. The user requires at least one Workforce Engagement permission set assigned to them: Workforce Engagement Admin, Workforce Engagement Analyst, Workforce Engagement Planner, or Workforce Engagement Agent.

Workforce Engagement Management uses this object to route training to agents. To assign modules to agents, users with the Learning Manager profile require Read, Create, and View All Records access to this object. To receive routed modules, users with the Learner profile require Read access to this object.

Fields

Field	Details
AssigneeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description A valid user ID for the user who's assigned the training. <code>AssigneeId</code> can't be empty if the <code>Status</code> field is <code>Assigned</code>. We recommend that you set <code>AssigneeId</code> to the value in <code>OwnerId</code>. This is a relationship field. Relationship Name Assignee Relationship Type Lookup Refers To User
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update

Field	Details
	Description The name of the learning module.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The user who owns the person training. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The status of the training. Possible values are: • A—Assigned; when the <code>Status</code> is assigned, the <code>AssigneeId</code> field can't be empty. • C—Completed • I—In Progress • N—New • P—Paused The default value is 'N'.
TrainingId	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the learning module. This is a relationship field. Relationship Name Training

Field	Details
	Relationship Type Lookup Refers To LearningContent
TrainingType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of training. Possible values are: • T—Trailhead

Usage

In version 54.0 and later releases, Workforce Engagement uses this object instead of the AgentTraining object to route learning modules to agents. If you set up agent engagement in your org in an earlier release, we rename AgentTraining records as PersonTraining records.

PicklistValueInfo

Represents the active picklist values for a given picklist field. This object is available in API version 40.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Fields

Field	Details
DurableId	Type string Properties Filter, Group, Nillable, Sort Description Unique identifier for the field.
EntityParticleId	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description Represents the picklist field to which this value is related. Relationship Name EntityParticle Relationship Type Lookup Refers To EntityParticle
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the picklist value is active or not.
IsDefaultValue	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this value is the default for the picklist field. Only one value can be the default value.
Label	Type string Properties Filter, Group, Nillable, Sort Description The label for the picklist value.
ValidFor	Type string Properties Filter, Group, Nillable, Sort Description A set of bits where each bit indicates a controlling value for which this picklist value is valid.

Field	Details
Value	Type string Properties Filter, Group, Nillable, Sort Description The API name of the picklist value.

PickTicket

A PickTicket represents quantities of one or more products to be picked for fulfillment at a location. It can include products belonging to one or more fulfillment orders. This object is available in API version 57.0 and later.

A PickTicket is associated with one or more PickTicketAssignments and one or more PickTicketProducts. Each PickTicketAssignment represents the relationship between the PickTicket and a FulfillmentOrder. Each PickTicketProduct represents the quantity of a product to be picked as part of the PickTicket. If multiple FulfillmentOrders associated with the PickTicket include the same product, one PickTicketProduct can represent the total quantity of that product to be picked for all of those FulfillmentOrders.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available with an Order Management Growth license.

Fields

Field	Details
AssignedToId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The user assigned to pick the items associated with the PickTicket. This field is a relationship field. Relationship Name AssignedTo Relationship Type Lookup

Field	Details
	Refers To User
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed data in this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible the user accessed data in this record or list view but didn't view it directly.
LocationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The location fulfilling the items to be picked. This field is a relationship field. Relationship Name Location Relationship Type Lookup Refers To Location
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the PickTicket record. By default, the asset owner is the user who created the record. This field is a polymorphic relationship field.

Field	Details
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
PickTicketNumber	Type string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description Name of the PickTicket.
Status	Type picklist
	Properties Create, Filter, Group, Printed, Sort, Update
	Description Status of the PickTicket. Each status corresponds to one status category, shown here in parentheses. You can customize the status picklist to represent your business processes, but the status category picklist is fixed because processing is based on those values. If you customize the status picklist, include at least one status value for each status category. Default values are: • Assigned (Active) • Canceled (Canceled) • Completed (Completed) • Created (Active) • Draft (Draft) • Picked (Active) • Picking (Active)
StatusCategory	Type picklist
	Properties Defaulted on create, Filter, Group, Restricted picklist, Sort
	Description Status category of the PickTicket. Processing of the PickTicket depends on this value. Each status category corresponds to one or more status values. Possible values are: • ACTIVE

Field	Details
	• CANCELED • COMPLETED • DRAFT The default value is DRAFT.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PickTicketFeed on page 55

Feed tracking is available for the object.

PickTicketShare on page 67

Sharing is available for the object.

SEE ALSO:

[PickTicketAssignment](#)

[PickTicketProduct](#)

PickTicketAssignment

Represents the association of a FulfillmentOrder with a PickTicket. A PickTicket has one PickTicketAssignment for each FulfillmentOrder containing products to be picked as part of that PickTicket. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available with an Order Management Growth license.

Fields

Field	Details
AttachedToId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description ID of the FulfillmentOrder to associate with a PickTicket. This field is a relationship field. Relationship Name AttachedTo Relationship Type Lookup Refers To FulfillmentOrder
PickTicketAssignmentNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the PickTicketAssignment.
PickTicketId	Type reference Properties Create, Filter, Group, Sort Description ID of the PickTicket to associate with a FulfillmentOrder. This field is a relationship field. Relationship Name PickTicket Relationship Type Lookup Refers To PickTicket

SEE ALSO:

[PickTicket](#)[FulfillmentOrder](#)[PickTicketProduct](#)

PickTicketProduct

Represents a quantity of a product to be picked as part of a PickTicket. It can include quantities for multiple FulfillmentOrders. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available with an Order Management Growth license.

Fields

Field	Details
PickTicketId	Type reference Properties Create, Filter, Group, Sort Description ID of the PickTicket associated with the PickTicketProduct. This field is a relationship field. Relationship Name PickTicket Relationship Type Lookup Refers To PickTicket
PickTicketProductNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the PickTicketProduct.
PickedQuantity	Type double Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description Quantity of the PickTicketProduct that has been picked.
Product2Id	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the product associated with the PickTicketProduct. This field is a relationship field. Relationship Name Product2 Relationship Type Lookup Refers To Product2
ProductCode	Type string Properties Filter, Group, Nillable, Sort Description Product code of the product associated with the PickTicketProduct.
Quantity	Type double Properties Create, Filter, Sort, Update Description Total quantity that's requested to be picked of the associated product.
RejectReason	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The reason why some or all of the requested quantity isn't being picked. Possible values are: - Defected - Other - Out of stock

Field	Details
RejectedQuantity	Type double Properties Create, Filter, Nillable, Sort, Update Description The requested quantity that hasn't been picked. When the status category of the associated PickTicket is set to <code>Completed</code>, this value is automatically calculated as <code>Quantity - PickedQuantity</code>.
StockKeepingUnit	Type string Properties Filter, Group, Nillable, Sort Description The stock keeping unit (SKU) of the associated product.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[PickTicketProductFeed](#) on page 55

Feed tracking is available for the object.

SEE ALSO:

[PickTicket](#)

[PickTicketAssignment](#)

[Product2](#)

PipelineInspectionListView

Represents a pipeline view, an intelligence view, or a saved filter. A pipeline view shows a set of opportunity records, based on specific criteria. An intelligence view shows a set of account, lead, or contact records, based on specific criteria. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, enable the Pipeline Inspection user permission and the Pipeline Inspection setting. To create and modify list views, users must have the Create and Customize List Views permission. To create and modify public list views, users must have the Manage Public List Views permission.

Fields

Field	Details
ChangePeriodLiteralType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The date literal associated with the pipeline changes metrics group, used for filtering by a custom time period. Possible values are: • CUSTOM_DATE • FOUR_WEEKS_AGO • ONE_MONTH_AGO • ONE_WEEK_AGO • START_OF_THE_PERIOD • THIS_MONTH • THIS_WEEK • THREE_MONTHS_AGO • THREE_WEEKS_AGO • TWO_MONTHS_AGO • TWO_WEEKS_AGO
ChangePeriodStartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The start date used when filtering by a custom time period for pipeline changes metrics and forecast category metrics groups.
DateLiteralType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field

Details

Description

The date literal associated with the pipeline and intelligence views, used for filtering by the close date, created date, or activity date.

Possible values are:

	Accounts	Contacts & Leads	Opportunities
ALL_TIME	✓	✓ * *	✓ * *
CUSTOM_DATE	✓	✓	✓
DATE_NONE *	✓		
LAST_180_DAYS *	✓		
LAST_365_DAYS *	✓		
LAST_90_DAYS *	✓		
LAST_MONTH		✓	
NEXT_FISCAL_QUARTER			✓
NEXT_MONTH			✓
NEXT_WEEK			✓

Field

Details

	Accounts	Contacts & Leads	Opportunities
THIS_FISCAL_QUARTER		✓	✓
THIS_MONTH		✓	✓
THIS_WEEK		✓	✓

* Available in API version 60.0 and later.

** Available on the "My Important" list views.

EndDate

Type

date

Properties

Create, Filter, Group, Nillable, Sort, Update

Description

The end date used when filtering by a custom time period for close dates.

IsSystemManaged

Type

boolean

Properties

Defaulted on create, Filter, Group, Sort

Description

Indicates whether the system is managing changes to visibility and deletion of a pipeline view (`true`) or not (`false`).

The default value is `false`.

ListViewId

Type

reference

Properties

Create, Filter, Group, Sort

Description

The ID of the associated ListView record. This field is unique within your organization.

This is a relationship field.

Relationship Name

ListView

Field	Details
	Relationship Type Lookup Refers To ListView
MarketSegments	Type textarea Properties Create, Nillable, Update Description The customer segments selected in the Prospecting Center view. This field is available in API version 61.0 and later.
StartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The start date used when filtering by a custom time period for close dates.
SummaryField	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The opportunity field specified in a pipeline view to summarize pipeline inspection metrics. Possible values are standard field names or custom field IDs for custom currency and number fields. - Amount - ExpectedRevenue - TotalOpportunityQuantity <i>custom_field_ID</i> This field is available in API version 56.0 and later.
UserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the user whose records you want to see by default in the list view. This field is a relationship field.

Field	Details
	This field is available in API version 58.0 and later. Relationship Name User Relationship Type Lookup Refers To User
ViewType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The corresponding API name for the pipeline or intelligence view type. Possible values are: • MY_ACCOUNTS—Available in API version 60.0 and later. • MY_CONTACTS • MY_IMPORTANT_ACCOUNTS—Available in API version 60.0 and later. • MY_IMPORTANT_CONTACTS • MY_IMPORTANT_LEADS • MY_IMPORTANT OPPORTUNITIES • MY_LEADS • MY_PIPELINE • MY_PROSPECTING_CENTER_ACCOUNTS—Available in API version 61.0 and later.

Usage

Use this object to retrieve the metadata for a pipeline inspection view.

PipelineInspectionSumField

Use this object to learn which field from the opportunity object is used to aggregate Pipeline Inspection metrics on a pipeline view. This object is available in API version 56.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To use PipelineInspectionSumField, enable Pipeline Inspection. Users with a Pipeline Inspection user permission, the Customize Application permission or the Modify All Data permission can access this object. To create and modify records, users must have either the Customize Application permission or the Modify All Data permission.

Fields

Field	Details
SubjectType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The object that stores the summary fields. Possible values are: • Opportunity
SummaryField	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The field used to summarize Pipeline Inspection metrics. Possible values are standard field names or custom field IDs for custom currency and number fields. • Amount • ExpectedRevenue • TotalOpportunityQuantity • custom_field_ID

PipelineInspMetricConfig

Represents the configuration of a forecast category metric that appears in the Pipeline Inspection view. This object is available in API version 55.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description Read only. The unique name of a Pipeline Inspection metric configuration in the API.
IsCumulative	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Read only. Whether the metric is cumulative.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Read only. The language of the Pipeline Inspection metric.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Customized label of the Pipeline Inspection metric. Limit: 50 characters.
Metric	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The Pipeline Inspection metric. Possible values are: • BestCase • ClosedLost • ClosedWon • Commit

Field	Details
	• MostLikely • OpenPipeline • TotalPipeline

PipelineInspMetricConfigLocalization

Represents the translated label of a Pipeline Inspection metric. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
Language	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The language of the Pipeline Inspection metric.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix of the Pipeline Inspection metric language.
ParentId	Type reference Properties Create, Filter, Group, Sort Description The ID of the related Pipeline Inspection metric. This field is a relationship field. Relationship Name Parent

Field	Details
	Relationship Type Lookup
	Refers To PipelineInspMetricConfig
Value	Type textarea
	Properties Create, Filter, Sort, Update
	Description The value of the Pipeline Inspection metric.

PlatformAction

PlatformAction is a virtual read-only object. It enables you to query for actions displayed in the UI, given a user, a context, device format, and a record ID. Examples include standard and custom buttons, quick actions, and productivity actions.

Supported Calls

`describeSObjects()`, `query()`

Fields

Field	Details
ActionListContext	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description Required. The list context this action applies to. Valid values are: - Assistant - BannerPhoto - Chatter - Dockable - FeedElement - Flexipage - Global - ListView

Field	Details
	• <code>ListViewDefinition</code> • <code>ListViewRecord</code> • <code>Lookup</code> • <code>MruList</code> • <code>MruRow</code> • <code>ObjectHomeChart</code> • <code>Photo</code> • <code>Record</code> • <code>RecordEdit</code> • <code>RelatedList</code> • <code>RelatedListRecord</code>
<code>ActionTarget</code>	Type textarea Properties Nillable Description The URL to invoke or describe the action when the action is invoked. If the action is a standard button overridden by a Visualforce page, the <code>ActionTarget</code> returns the URL of the Visualforce page, such as <code>/apex/pagename</code>. This field is available in API version 35.0 and later.
<code>ActionTargetType</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of the target when this action is triggered. Valid values are: • <code>Describe</code>—applies to actions with a user interface, such as quick actions • <code>Invoke</code>—applies to actions with no user interface, such as action links or invocable actions • <code>Visualforce</code>—applies to standard buttons overridden by a Visualforce page
<code>ActionTargetUrl</code>	Type string Properties Filter, Group, Nillable, Sort Description URL to invoke or describe the action when the action is invoked. This field is deprecated in API version 35.0 and later. Use <code>ActionTarget</code> instead.

Field	Details
Category	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Applies only to action links. Denotes whether the action link shows up in the feed item list of actions or the overflow list of actions. Valid values are: • Primary • Overflow
ConfirmationMessage	Type string Properties Filter, Group, Nillable, Sort Description Applies only to action links. The message to display before the action is invoked. Field is null if no confirmation is required before invoking the action.
DeviceFormat	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Specifies which action icon the PlatformAction query returns. If this field isn't specified, it defaults to Phone. Valid values are: • Aloha • Desktop • Phone • Tablet
ExternalId	Type string Properties Filter, Group, Nillable, Sort Description The unique ID for the PlatformAction. If the action doesn't have an ID, its API name is used.
GroupId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description The unique ID of a group of action links.
IconContentType	Type string Properties Filter, Group, Nillable, Sort Description The content type—such as .jpg, .gif, or .png—of the icon for this action. Applies to both custom and standard icons assigned to actions.
IconHeight	Type int Properties Filter, Group, Nillable, Sort Description The height of the icon for this action. Applies only to standard icons.
IconUrl	Type url Properties Filter, Group, Nillable, Sort Description The URL of the icon for this action.
IconWidth	Type int Properties Filter, Group, Nillable, Sort Description The width of the icon for this action. Applies only to standard icons.
InvocationStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The status of the action within the feed item. Applies to action links only. Valid values are: - Failed - New - Pending

Field	Details
	• <code>Successful</code>
<code>InvokedByUserId</code>	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user who most recently invoked this action within the current feed item. Applies to action links only. This is a relationship field. Relationship Name InvokedByUser Relationship Type Lookup Refers To User
<code>IsGroupDefault</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Denotes whether this action is the default in an action link group. False for other action types. Applies to action links only.
<code>IsMassAction</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the action can be performed on multiple records. This field is available in API version 38.0 and later.
<code>Label</code>	Type string Properties Filter, Group, Sort Description The label to display for this action.

Field	Details
PrimaryColor	Type string Properties Filter, Group, Nillable, Sort Description The primary color of the icon for this action.
RelatedListRecordId	Type string Properties Filter, Group, Nillable, Sort Description Represents the ID of a record in an object's related list. This field is available in API version 38.0 and later.
RelatedSourceEntity	Type string Properties Filter, Group, Nillable, Sort Description When the <code>ActionListContext</code> is <code>RelatedList</code> or <code>RelatedListRecord</code>, this field represents the API name of the related list to which the action belongs.
Section	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The section of the user interface the action resides in. Applicable only to Lightning Experience. Valid values are: • ActivityComposer • CollaborateComposer • NotesComposer • Page • SingleActionLinks This field is available in API version 35.0 and later.
SourceEntity	Type string Properties Filter, Group, Sort

Field	Details
	Description Required. The object or record with which this action is associated.
Subtype	Type string Properties Filter, Group, Nillable, Sort Description The subtype of the action. For quick actions, the subtype is <code>QuickActionType</code> . For custom buttons, the subtype is <code>WebLinkTypeEnum</code> . For action links, subtypes are <code>Api</code> , <code>ApiAsync</code> , <code>Download</code> , and <code>Ui</code> . Standard buttons and productivity actions have no subtype.
TargetObject	Type string Properties Filter, Group, Nillable, Sort Description The type of object record the action creates, such as a contact or opportunity. This field is available in API version 41.0 and later.
TargetUrl	Type string Properties Filter, Nillable, Sort Description The URL that a custom button or link points to. This field is available in API version 41.0 and later.
Type	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of the action. Valid values are: • <code>ActionLink</code>—An indicator on a feed element that targets an API, a web page, or a file, represented by a button in the Salesforce Chatter feed UI. • <code>CustomButton</code>—When clicked, opens a URL or a Visualforce page in a window or executes JavaScript. • <code>InvocableAction</code>

Field	Details
	<code>ProductivityAction</code>—Productivity actions are predefined and attached to a limited set of objects. Productivity actions include Send Email, Call, Map, View Website, and Read News. Except for the Call action, you can't edit productivity actions. <code>QuickAction</code>—A global or object-specific action. <code>StandardButton</code>—A predefined Salesforce button such as New, Edit, and Delete.

Usage

`PlatformAction` can be described using `describeSObject()`.

You can directly query for `PlatformAction`. For example, this query returns all fields for actions associated with each of the records of the listed objects:

```
SELECT ExternalId, ActionTargetType, ActionTargetUrl, ApiName, Category,
       ConfirmationMessage, ExternalId, GroupId, UiTheme, IconUrl, IconContentType,
       IconHeight, IconWidth, PrimaryColor, InvocationStatus, InvokedByUserId,
       IsGroupDefault, Label, LastModifiedDate, Subtype, SourceEntity, Type
FROM PlatformAction
WHERE SourceEntity IN ('001xx000003DGsH', '001xx000003DHBq', 'Task') AND
       ActionListContext = 'Record';
```



Note: To query `PlatformAction`, provide the `ActionListContext` and `SourceEntity`. If you query for `ActionListContext` with a value of `RelatedList`, and don't specify a `RelatedSourceEntity`, the query returns the API name of the related list. In API v43.0 and before, `SourceEntity = 'Object API Name'` and `ActionListContext = 'ListView'` is an invalid combination to fetch quick actions in a SOQL query. Use `SourceEntity = 'Object ID'` and `ActionListContext = 'ListView'` instead.

This query uses multiple `ActionListContext` values in its `WHERE` clause to return all actions in the Lightning Experience user interface (`DeviceFormat = 'Desktop'`) for the specified object:

```
SELECT ActionListContext, Label, Type, Subtype, Section, SourceEntity,
       RelatedSourceEntity, ActionTarget, ActionTargetType, ApiName, Category,
       ConfirmationMessage, DeviceFormat, ExternalId, GroupId, IconContentType,
       IconHeight, IconUrl, IconWidth, Id, InvocationStatus, InvokedByUserId,
       IsGroupDefault, LastModifiedDate, PrimaryColor
FROM PlatformAction
WHERE ActionListContext IN ('Record', 'Chatter', 'RelatedList') AND
       SourceEntity = '001xx000003DlvX' AND
       DeviceFormat = 'Desktop';
```

PlatformEventUsageMetric

Contains usage data for event publishing and delivery to CometD and Pub/Sub API clients, `empApi` Lightning components, and event relays. If Enhanced Usage Metrics isn't enabled, usage data is available for the last 24 hours, ending at the last hour, and for historical daily usage. In API 58.0 and later, you can enable Enhanced Usage Metrics to get usage data by event name and client for granular time intervals. `PlatformEventUsageMetric` contains separate usage metrics for platform events and change data capture events. This object is available in API version 50.0 and later.

Supported Calls

`describeSObjects(), query()`

Fields

Field	Details
<code>Client</code>	Type string Properties Filter, Group, Nillable, Sort Description This field is available only when Enhanced Usage Metrics is enabled. The ID of the client. The <code>Client</code> field is populated with one of the following values. The <code>Client</code> field can be one of these values. - For a Streaming API (CometD) client and the empApi Lightning component, the client value is the ID of the CometD session. - For a Pub/Sub API client, the client value is <code>PUB_SUB_API</code>. - For an event relay, the client value is <code>EVENT_RELAY</code>. - For the publish usage of Change Data Capture events, the client value is <code>SYSTEM</code>. - For publish usages using REST API, the client value is <code>REST_API</code>. - For publish usages using Flow, the client value is <code>FLOW</code>. - For publish usages using SOAP API, the client value is <code>SOAP_API</code>. - For publish usages using Bulk API, the client value is <code>BULK_API</code>. - For Apex, the publish usage client value is <code>APEX</code> and the delivery usage client value is the Apex Trigger ID starting with 01q.
<code>EndDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The end date and time in UTC used for querying usage metrics. The date granularity is hourly. To get usage data for the last 24 hours, the end date is the current date in UTC. The time is the current time in UTC rounded down to the previous hour. For example, 11:23 is 11:00 and the date format is: 2020-08-04T11:00:00.000Z To get historical data, the end date in UTC is the end of the date range with hours specified as 0. For example: 2020-08-04T00:00:00.000Z. To query a date range, you can use the <code><</code> or <code><=</code> operators. For the date format to use, see Date Formats and Date Literals in the <i>SOQL and SOSL Reference</i>.

Field	Details
EventName	Type string Properties Filter, Group, Nillable, Sort Description This field is available only when Enhanced Usage Metrics is enabled. The API name of a custom platform event or a change event. - Custom platform event with the label My Event: <code>My_Event__e</code> - Change event example: <code>AccountChangeEvent</code> When you query usage metrics for <code>EventName</code>, specify the <code>UsageType</code> field in the <code>SELECT</code> or <code>WHERE</code> clause.
EventType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description This field is available when Enhanced Usage Metrics is enabled. The type of event you would like to query usage metrics for, such as a change event or a custom platform event. Possible values are: <code>CHANGE__EVENT</code>—A Change Data Capture event. <code>CUSTOM__PLATFORM__EVENT</code>—A platform event that an admin defined in your Salesforce org. When you query usage metrics for <code>EventType</code>, specify the <code>UsageType</code> field in the <code>SELECT</code> or <code>WHERE</code> clause.
ExternalId	Type string Properties Filter, Group, Nillable, Sort Description This field is not in use.
Name	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The name of the metric to get usage for. Possible values are:

Field	Details			
	- CHANGE_EVENTS_DELIVERED—Number of change data capture events delivered to CometD and Pub/Sub API clients, empApi Lightning components, and event relays - CHANGE_EVENTS_PUBLISHED—Number of change data capture events published - PLATFORM_EVENTS_DELIVERED—Number of platform events delivered to CometD and Pub/Sub API clients, empApi Lightning components, and event relays - PLATFORM_EVENTS_PUBLISHED—Number of platform events published			
StartDate	Type dateTime Properties Filter, Nillable, Sort Description The start date and time in UTC used for querying usage metrics. The date granularity is hourly. To get usage data for the last 24 hours, the start date is the previous day in UTC. The time is the current time in UTC rounded down to the previous hour. For example, 11:23 is 11:00 and the date format is: 2020-08-03T11:00:00.000Z To get historical data, the start date is the start of the date range with hours specified as 0. For example: 2020-08-03T00:00:00.000Z. To specify a date range, you can use the > or >= operators. If Enhanced Usage Metrics is enabled, keep in mind these tips. - Make sure the time span between StartDate and EndDate is valid for the TimeSegment value chosen. - The maximum date range that you can specify between StartDate and EndDate is 60 days. For the date format to use, see Date Formats and Date Literals in the <i>SOQL and SOSL Reference</i>.			
TimeSegment	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description This field is available when Enhanced Usage Metrics is enabled. The time interval used for aggregating usage data returned in the query results. Valid TimeSegment values depend on the time range specified with StartDate and EndDate. Possible values are: <table><tr><td>Daily</td><td>Usage data is aggregated for each day within the specified time range.</td><td>Valid only if the time range specified with StartDate and EndDate in the query is at least 24 hours.</td></tr></table>	Daily	Usage data is aggregated for each day within the specified time range.	Valid only if the time range specified with StartDate and EndDate in the query is at least 24 hours.
Daily	Usage data is aggregated for each day within the specified time range.	Valid only if the time range specified with StartDate and EndDate in the query is at least 24 hours.		

Field	Details		
	Hourly	Usage data is aggregated for each hour within the specified time range.	Valid only if the time range specified with <code>StartDate</code> and <code>EndDate</code> in the query is between one hour and 24 hours.
	FifteenMinutes	Usage data is aggregated for each 15-minute period within the specified time range.	Valid only if the time range specified with <code>StartDate</code> and <code>EndDate</code> in the query is between 15 minutes and one hour.

UsageType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description This field is available when Enhanced Usage Metrics is enabled. The type of event usage metrics to query for, such as event publishing or event delivery. Use this field with the <code>EventName</code> or <code>EventType</code> fields. Possible values are: - PUBLISH—Usage metrics for published events. - DELIVERY—Usage metrics for events that were delivered to subscribers.
-----------	---

Value	Type long Properties Filter, Group, Nillable, Sort Description The usage value for the specified metric and date range.
-------	--

Usage

For more information, see [Monitor Platform Event Publishing and Delivery Usage](#) in the *Platform Events Developer Guide*.

PlatformStatusAlertEvent

The documentation has moved to [PlatformStatusAlertEvent](#) in the *Platform Events Developer Guide*.

PortalDelegablePermissionSet

PortalDelegablePermissionSet is a base platform object used to store permission sets that can be assigned by a delegated portal/external user admin (DPUA) to portal users. This object is available in API version 47.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description Required. The unique string used to identify the record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language used in the org.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Required. The unique string to identify the record.
PermissionSetId	Type reference Properties Create, Filter, Group, Sort, Update Description The unique ID of the permission set the DPUA profile can assign to other portal users.

Field	Details
ProfileId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the DPUA profile.

PresenceConfigDeclineReason

Represents the settings for a decline reason that a presence user provides when declining work. This object is available in API version 37.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `update()`, `query()`, `retrieve()`

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.

As of Spring '20 and later, only authenticated internal and external users can access this object.

Fields

Field	Details
PresenceDeclineReasonId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the PresenceDeclineReason record.
PresenceUserConfigId	Type reference Properties Create, Filter, Group, Sort Description The ID of the PresenceUserConfig record where the decline reasons are added.

PresenceDeclineReason

Represents an Omni-Channel decline reason that agents can select when declining work requests. This object is available in API version 37.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. Because changing terms in our code can break current implementations, we maintained this object's name.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `update()`, `query()`, `retrieve()`

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.
As of Spring '20 and later, only authenticated internal and external users can access this object.

Fields

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The language of the PresenceDeclineReason.

Field	Details
MasterLabel	Type string Properties Create, Filter, Group, Sort Description The label for the PresenceDeclineReason .

PresenceUserConfig

Represents a configuration that determines a presence user's settings. This object is available in API version 32.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `update()`, `query()`, `retrieve()`

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.

As of Spring '20 and later, only authenticated internal and external users can access this object.

Fields

Field	Details
AcwExtensionDuration	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The maximum length of time, measured in seconds, an agent can spend on After Conversation Work (ACW) each time they extend the timer. You must set this field if <code>HasAcwExtensionEnabled</code> is set to <code>true</code> . Specify a value from 10 through 3600. This field is available in API version 56.0 and later.
AfterConvoWorkMaxTime	Type int Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The maximum length of time, measured in seconds, an agent has to complete After Conversation Work (ACW). You must set this field if <code>HasAfterConvoWorkTimer</code> is set to <code>true</code>. Specify a value from 10 through 3600. This field is available in API version 56.0 and later.
Capacity	Type int Properties Create, Filter, Group, Sort Description The maximum number of work units an agent can be assigned at one time.
CustomSoundId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Relationship Name CustomSound Relationship Type Lookup Refers To StaticResource Description The ID of the static resource for the custom sound selected to play for the <code>PresenceUserConfig</code> object.
DeveloperName	Type string Properties Create, Filter, Group, Sort Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance may slow while Salesforce generates one for each record.

Field	Details
	Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
HasAcwExtensionEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If set to <code>true</code>, agents can extend their After Conversation Work (ACW) time. Available only if <code>HasAfterConvoWorkTimer</code> is set to <code>true</code>. If set to <code>true</code>, you must also set the <code>AcwExtensionDuration</code> and <code>MaxExtensions</code> fields. The default value is <code>true</code>. This field is available in API version 56.0 and later.
HasAfterConvoWorkTimer	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If set to <code>true</code>, After Conversation Work (ACW) time can be configured for the channel. If set to <code>true</code>, you must also set the <code>AfterConvoWorkMaxTime</code> field. The default value is <code>false</code>. This field is available in API version 56.0 and later.
Language	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The language of the presence configuration.
MasterLabel	Type string Properties Create, Filter, Group, Sort Description The label of the presence configuration.
MaxExtensions	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description The maximum number of times an agent can extend their After Work Conversation (ACW) time. Specify a value from 1 through 10. You must set this field if <code>HasAcwExtensionEnabled</code> is set to <code>true</code>. This field is available in API version 56.0 and later.
OptionsAllowAnyDestinationQueueToTransfer	Type boolean Properties Create, Filter, Update Description Indicates that a rep can transfer a message from an enhanced Messaging channel to any queue (<code>true</code>) or only the selected queues (<code>false</code>). This field is available in API version 61.0 and later.
OptionsAllowAnyDestinationFlowToTransfer	Type boolean Properties Create, Filter, Update Description Indicates that a rep can transfer a message from an enhanced Messaging channel to any flow (<code>true</code>) or only the selected flows (<code>false</code>). This field is available in API version 61.0 and later.
OptionsAllowAnyDestinationProfileToTransfer	Type boolean Properties Create, Filter, Update Description Indicates that a rep can transfer a message from an enhanced Messaging channel to any profile (<code>true</code>) or only the selected profiles (<code>false</code>). This field is available in API version 61.0 and later.
OptionsIsAutoAcceptEnabled	Type boolean Properties Create, Filter Description Indicates whether work items that are routed to agents are automatically accepted (<code>true</code>) or not (<code>false</code>). Available only if <code>OptionsIsDeclineEnabled</code> is set to <code>false</code>.

Field	Details
OptionsIsDeclineEnabled	Type boolean Properties Create, Filter Description Indicates whether agents can decline work items that are routed to them (<code>true</code>) or not (<code>false</code>). Available only if <code>OptionsIsAutoAcceptEnabled</code> is set to <code>false</code>.
OptionsIsDeclineReasonEnabled	Type boolean Properties Create, Filter Description Indicates whether agents can select a reason for declining work requests (<code>true</code>) or not (<code>false</code>). This can be selected only if decline reasons are enabled.
OptionsIsDisconnectSoundEnabled	Type boolean Properties Create, Filter Description Indicates whether a sound is played when agents are disconnected from Omni-Channel (<code>true</code>) or not (<code>false</code>).
OptionsIsRequestSoundEnabled	Type boolean Properties Create, Filter Description Indicates whether a sound plays with incoming work requests (<code>true</code>) or not (<code>false</code>). Set to <code>true</code> by default.
PresenceStatusOnDeclineId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the presence status that's automatically assigned to the agent when the agent declines a work item. Available only if <code>OptionsIsDeclineEnabled</code> is set to <code>true</code>.
PresenceStatusOnPushTimeoutId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort Description The ID of the presence status that's automatically assigned to the agent when the agent doesn't respond to a work item before push timeout occurs. Available in API version 36.0 and later.
SoundLength	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The length of time that a sound plays when new work is assigned to an agent.

PresenceUserConfigProfile

Represents a configuration that determines the settings that are assigned to presence users who are assigned to a specific profile. User-level configurations override profile-level configurations. This object is available in API version 32.0 and later.

Supported Calls

`create()`, `delete()`, `query()`, `update()`, `retrieve()`

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.

As of Spring '20 and later, only authenticated internal and external users can access this object.

Fields

Field	Details
PresenceUserConfigId	Type reference Properties Create, Filter, Group, Sort Description If an individual user is also assigned a presence configuration through the PresenceUserConfigProfile, this configuration will override that.

Field	Details
ProfileId	Type reference Properties Create, Filter, Group, Sort Description The ID of the profile that's associated with this presence configuration. A profile can be associated with only one presence configuration.

PresenceUserConfigUser

Represents a configuration that determines the settings that are assigned to a presence user. These user-level configurations override profile-level configurations. This object is available in API version 32.0 and later.

Supported Calls

`create()`, `delete()`, `query()`, `update()`, `retrieve()`

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.

As of Spring '20 and later, only authenticated internal and external users can access this object.

Fields

Field	Details
PresenceUserConfigId	Type reference Properties Create, Filter, Group, Sort Description The ID of the presence configuration.
UserId	Type reference Properties Create, Filter, Group, Sort Description The ID of the user who's associated with this presence configuration. A user can be associated with only one presence configuration.

PriceAdjustmentGroupShape

Defines the business logic for a top-level price adjustment, for example, a discount applied to an entire order. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `getDeleted()`, `getUpdated()` `query()`, `retrieve()`

Special Access Rules

This object is available with Subscription Management, B2B Commerce, or B2C Commerce.

Fields

Field	Details
AdjustmentSource	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the source of the adjustment. This field is available with B2B Commerce. Possible values are: • Discretionary—The adjustment is entered manually, for example, by a sales rep. • Promotion—The adjustment is part of a promotion. • Rule—Reserved for future use. • System—The adjustment is configured by the system data, for example, as part of a pricing rule or discount schedule.
AdjustmentType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Indicates whether the adjustment is a percentage, an amount, or an override. Possible values are: • AdjustmentAmount—Reserved for future use. The adjustment value is a numerical amount. • AdjustmentPercentage— The adjustment value is a percentage. • OverrideAmount— The override value is a numerical amount.

Field	Details
AdjustmentValue	Type double Properties Create, Filter, Nillable, Sort Description The value of the adjustment. To indicate a discount, use a negative number.
Description	Type textarea Properties Create, Nillable Description User-entered description of the price adjustment group. Available in API versions 57.0.
PriceAdjustmentCauseId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the record that is the source of the adjustment. For example, if the price adjustment is due to a promotion, this field contains the ID of the promotion record. If the price adjustment is due to a price adjustment tier, this field contains the ID of the price adjustment tier record. This field is a polymorphic relationship field. Relationship Name PriceAdjustmentCause Relationship Type Lookup Refers To PriceAdjustmentTier
PriceAdjustmentGroupShapeName	Type string Properties Create, Filter, Group, idLookup, Sort Description Name of the price adjustment group shape.
Priority	Type int

Field	Details
	Properties Create, Filter, Group, Nillable, Sort Description A positive integer indicating the order in which this price adjustment group is applied, relative to other price adjustment groups. A <code>Priority</code> of 1 indicates this price adjustment group is applied first. Price adjustments with a null priority are applied after price adjustments with a specified priority. If two or more price adjustments have a null priority, percentage adjustments are applied before amount adjustments. Applying a percentage adjustment before an amount adjustment results in a larger total adjustment.  Note: The value of <code>Priority</code> must be unique among price adjustment groups in the same sales transaction.
<code>SalesTransactionShapeId</code>	Type reference Properties Create, Filter, Group, Sort Description The ID of the sales transaction that the price adjustment group belongs to. This field is a relationship field. Relationship Name SalesTransactionShape Relationship Type Lookup Refers To SalesTransactionShape
<code>TotalAmount</code>	Type currency Properties Create, Filter, Nillable, Sort Description The total amount of adjustments of all related price adjustment items, inclusive of quantity, prorated for the duration of the subscription. This field is a calculated field equal to the sum of the <code>TotalAmount</code> fields in the related price adjustment items.

PriceAdjustmentItemShape

Defines the business logic for an item-level price adjustment, for example, a discount on an order item. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is available with Subscription Management, B2B Commerce, or B2C Commerce.

Fields

Field	Details
AdjustmentAmountScope	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Used with <code>AdjustmentValue</code> to determine the amount of the adjustment. Possible values are: • Total—The adjustment applies to the line item's total and isn't multiplied by the quantity. For example, let's say a sales transaction item quantity is 10 and the <code>TotalLineAmount</code> is 1000. If the price adjustment item has an <code>AdjustmentValue</code> of -10, an <code>AdjustmentType</code> of <code>AdjustmentAmount</code>, and an <code>AdjustmentAmountScope</code> of <code>Total</code>, the \$10 discount is applied to the total line amount. The <code>TotalAmount</code> of the price adjustment item is $\\$1000 + (-\\$10) = \\$990$. • Unit—The adjustment is multiplied by the line item's quantity. For example, let's say a sales transaction item quantity is 5 and the <code>TotalLineAmount</code> is 1000. If the price adjustment item has an <code>AdjustmentValue</code> of -10, an <code>AdjustmentType</code> of <code>AdjustmentAmount</code>, and an <code>AdjustmentAmountScope</code> of <code>Unit</code>, the \$10 discount is applied to each line amount. The <code>TotalAmount</code> of the price adjustment item is $\\$1000 + (-\\$10 \times 5) = \\$950$. • UnproratedTotal—No adjustment is applied to the line items.
AdjustmentSource	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the source of the adjustment. Possible values are: • Discretionary— The adjustment is entered manually; for example, by a sales rep.

Field	Details
	• Promotion— The adjustment is a promotion. • Rule— Reserved for future use. • System— The adjustment is determined by the pricing configuration for the product; for example, as part of a discount schedule.
AdjustmentType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Indicates whether the adjustment is a percentage, an amount, or an override. Possible values are: • AdjustmentAmount—The adjustment value is a numerical amount. • AdjustmentPercentage— The adjustment value is a percentage. • OverrideAmount— The override value is a numerical amount.
AdjustmentValue	Type double Properties Create, Filter, Nillable, Sort Description The value of the adjustment. Used together with AdjustmentAmountScope to determine the amount of the adjustment.
Description	Type textarea Properties Create, Nillable Description The user-entered description of the price adjustment item. Available in API version 57.0.
PriceAdjustmentCauseId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the record that caused the adjustment. For example, if the price adjustment is due to a promotion, this field contains the ID of the Promotion record. If the price adjustment is due to a price adjustment tier, this field contains the ID of the PriceAdjustmentTier record. This field is a polymorphic relationship field.

Field	Details
	Relationship Name PriceAdjustmentCause Relationship Type Lookup Refers To PriceAdjustmentTier
PriceAdjustmentGroupShapeId	Type reference Properties Create, Filter, Group, Nillable, Sort Description A reference to the object interface or object that summarizes the values from multiple price adjustment items. If the related entity is an object, the object must implement the <code>PriceAdjustmentGroupShape</code> object. This field is a relationship field. Relationship Name PriceAdjustmentGroupShape Relationship Type Lookup Refers To PriceAdjustmentGroupShape
PriceAdjustmentItemShapeName	Type string Properties Create, Filter, Group, idLookup, Sort Description The name of the price adjustment item shape.
Priority	Type int Properties Create, Filter, Group, Nillable, Sort Description A positive integer indicating the order in which this price adjustment item is applied, relative to other price adjustment items. A <code>Priority</code> of 1 indicates this price adjustment item is applied first. Price adjustments with a null priority are applied after price adjustments with a specified priority. If two or more price adjustments have a null priority, percentage adjustments are applied before amount adjustments. Applying a percentage adjustment before an amount adjustment results in a larger total adjustment.

Field	Details
	 Note: The value of <code>Priority</code> must be unique among price adjustment items related to the same price adjustment group. For example, you can't have two price adjustment items with a priority of 1. For example, let's say that two price adjustment items apply to the same item to be priced. The first price adjustment, <code>Spring_Promotion</code>, defines a 10% discount and has <code>Priority</code> of 1. The second price adjustment, <code>Early_Renewal_Discount</code>, defines a \$2,000 discount and has a <code>Priority</code> of 2. In this case, the <code>Spring_Promotion</code> price adjustment is applied before the <code>Early_Renewal_Discount</code> price adjustment.
<code>SalesTransactionItemShapeId</code>	Type reference Properties Create, Filter, Group, Sort Description The ID of the sales transaction shape item that the price adjustment item applies to. This field is a relationship field. Relationship Name <code>SalesTransactionItemShape</code> Relationship Type Lookup Refers To <code>SalesTransactionItemShape</code>
<code>TotalAmount</code>	Type currency Properties Create, Filter, Nillable, Sort Description The total amount of the adjustment that applies to the item to be priced, inclusive of quantity, prorated for the duration of the subscription. For example, let's say the price adjustment item has an <code>AdjustmentAmountScope</code> of <code>Unit</code>, an <code>AdjustmentType</code> of <code>AdjustmentAmount</code>, and an <code>AdjustmentValue</code> of <code>-10</code>. This configuration indicates a \$10 per-unit discount. If the subscription is priced for 12 months and the pricing term is 1, the <code>PricingTermCount</code> on the sales transaction item is 12. If the quantity is 5, the value of <code>TotalAmount</code> is $5 \times 12 \times -10 = -600$.

PriceAdjustmentSchedule

Represents a series of discounts offered depending on your product's configuration, quantity, and when they're purchased in combination with other products. This object is available in API version 47.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available when the B2B Commerce license is enabled or when Subscription Management is enabled.

Fields

Field	Details
AdjustmentMethod	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The method for applying tiered pricing. Possible values are: • Range—All items receive the discount of the highest tier the quantity falls in. • Slab—Items receive the discount defined for the tier they fall in. The default value is Range. Term-based discounts can't be of type Slab. This field is available in API version 51.0 and later. The Slab method functions in the same way as the Range method.
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Text description of the price adjustment schedule.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the price adjustment schedule is active (true) or not (false). You can change this field's value as often as necessary. Label is Active. The default value is False.
LastReferencedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description Indicates whether the price adjustment schedule has been archived (<code>true</code>) or not (<code>false</code>). This field is read-only.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. The name of the price adjustment schedule. This field is read-only. Label is Price Adjustment Schedule Name.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The Salesforce ID of the sales representative who owns the price adjustment schedule.
ScheduleType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Indicates how the price adjustment is determined. This field is available when Subscription Management is enabled. This field is available in API version 55.0 and later. Possible values are: • Attribute—The characteristics or properties of a product determine the price adjustment. • Bundle—The price adjustment that is determined when you want to sell a group of products or services as a unit. • Custom—The price adjustment that can be customized for the user's needs.

Field	Details
	Term—The length of the subscription determines the price adjustment. Available in API version 58.0 and later. Volume—The quantity purchased determines the price adjustment. The default value is Volume.

Usage

When you create a `PriceAdjustmentSchedule`, you associate `PriceAdjustmentTiers` with it. A `PriceAdjustmentSchedule` is inactive until at least one `PriceAdjustmentTier` is added to it. A `PriceAdjustmentSchedule` comprises all related `PriceAdjustmentTiers`, with a maximum limit of 25 `PriceAdjustmentTiers` for Subscription Management.

To use `PriceAdjustmentSchedule`, associate it with a `PriceBookEntry`.

- You can associate a `PriceBookEntry` with up to five `PriceAdjustmentSchedules`, but only one `PriceAdjustmentSchedule` can be associated with a `PriceBookEntry`.
- When you activate or deactivate a `PriceAdjustmentSchedule`, its `PriceBookEntry` association is also activated or deactivated.
- An adjustment to a `PriceBookEntry` is applied only if the associated `PriceAdjustmentSchedule` is active.
- After a `PriceAdjustmentSchedule` is associated with a `PriceBookEntry`, if multicurrency is enabled, the `currencyIsoCode` field can't be modified.
- When you associate a `PriceAdjustmentSchedule` with a `PricebookEntry`, a junction object `PricebookEntryAdjustment` is created.

You can modify the `PriceAdjustmentTier` object, and the `ScheduleType` and `AdjustmentMethod` fields, only when a `PriceAdjustmentSchedule` is inactive.

Code Sample

```
public void priceAdjustmentScheduleSample()
{
    try
    {
        /* This code snippet will do the following:

        * 1. Create a new Price Adjustment Schedule
        * 2. Create and attach a Price Adjustment Tier to the Schedule
        * 3. Activate the Schedule
        * 4. Create a new PricebookEntry Adjustment. This will associate the Schedule to a
        Pricebook Entry. */

        //Create a Price Adjustment Schedule
        PriceAdjustmentSchedule pas = new PriceAdjustmentSchedule();
        pas.Name = 'Sample PAS';
        pas.Description = 'Sample Price Adjustment Schedule';
        pas.AdjustmentMethod = 'Range';
        insert pas;

        //Attach a valid Price Adjustment Tier
        PriceAdjustmentTier pat = new PriceAdjustmentTier();
        pat.PriceAdjustmentScheduleId = pas.Id;
        pat.LowerBound = 1.0;
        pat.UpperBound = 100.0;
    }
}
```

```
pat.TierType = 'AdjustmentPercentage';
pat.TierValue = 5.0;
insert pat;

//Activate the Schedule
pas.IsActive = true;
upsert pas;

//Create a new PricebookEntry Adjustment
PricebookEntryAdjustment pbea = new PricebookEntryAdjustment();
pbea.PricebookEntryId = '01uRM0000007Hb5YAE';
pbea.PriceAdjustmentScheduleId = pas.Id;
insert pbea;

} catch (ConnectionException ce) {
    ce.printStackTrace();
}
}
```

SEE ALSO:

- [PriceAdjustmentTier](#)
- [PricebookEntryAdjustment](#)

PriceAdjustmentTier

Represents a discount tier in a price adjustment schedule. This object is available in API version 47.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available only if the B2B Commerce license is enabled.

Fields

Field	Details
LowerBound	Type double
	Properties Create, Filter, Sort, Update

Field	Details
	Description The minimum quantity the discount can be applied to. It must be a positive integer and less than or equal to the upper bound of the tier.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description For internal use only.
PriceAdjustmentScheduleId	Type reference Properties Create, Filter, Group, Sort Description The ID of the price adjustment schedule that the discount is applied to.
TierType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The unit of the discount. Possible values are: • AdjustmentAmount—An amount discounted from an item's list price. Label is Amount. • AdjustmentPercentage—A percentage discounted from an item's list price. Label is Percentage. • AdjustmentOverride—An override of an item's list price. Label is Override.
TierValue	Type double Properties Create, Filter, Sort, Update Description The value of the discount.
UpperBound	Type double Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description The maximum quantity the discount can be applied to. The quantity must be a positive integer. Not inclusive. Set this value one digit higher than the quantity you want the tier to include. For example, if a tier's upper bound is 99, set the value of <code>UpperBound</code> to 100. For the last tier, the value is optional.

Usage

To use `PriceAdjustmentTiers`, associate them with a `PriceAdjustmentSchedule`.

Tiers can't overlap, and no gaps are allowed between tiers.

SEE ALSO:

[PriceAdjustmentSchedule](#)

Pricebook2

Represents a price book that contains the list of products that your org sells.



Note: Price books are represented by `Pricebook2` objects. As of API version 8.0, the `Pricebook` object is no longer available. Requests containing `Pricebook` are refused, and responses don't contain the `Pricebook` object.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Text description of the price book.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Indicates whether the price book is active (<code>true</code>) or not (<code>false</code>). Inactive price books are hidden in many areas in the user interface. You can change this field's value as often as necessary. Label is Active.
IsArchived	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the price book has been archived (<code>true</code>) or not (<code>false</code>). This field is read only.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the price book has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
IsStandard	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the price book is the standard price book for the org (<code>true</code>) or not (<code>false</code>). Every org has one standard price book—all other price books are custom price books.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Name of this object. This field is read-only for the standard price book. Label is Price Book Name .
ValidFrom	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time when a Commerce price book is initially valid. If this field is <code>null</code> , the price book is valid immediately when active. Available in API version 48.0 and later.
ValidTo	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time when a Commerce price book is valid to. If this field is <code>null</code> , the price book is valid until it's deactivated. Available in API version 48.0 and later.

Usage

A price book is a list of products that your org sells.

- Each org has one standard price book that defines the standard or generic list price for each product or service that it sells.
- An org can have multiple custom price books to use for specialized purposes, such as for discounts, different channels or markets, or select accounts or opportunities. While your client application can create, delete, and update custom price books, your client application can only update the standard price book.
- For some orgs, the standard price book is the only price needed. If you set up other price books, you can reference the standard price book when setting up list prices in custom price books.

Use this object to query standard and custom price books that have been configured for your org. A common use of this object is to allow your client application to obtain valid Pricebook2 object IDs for use when configuring PricebookEntry records via the API.

Your client application can perform the following tasks on PricebookEntry objects:

- Query

- Create for the standard price book or custom price books.
- Update
- Delete
- Change the `IsActive` field when creating or updating records

PriceBook2, Product2, and PricebookEntry Relationships

In the API:

- Price books are represented by Pricebook2 records (as of version 8.0, the Pricebook object is no longer available).
- Products are represented by Product2 records (as of version 8.0, the Product object is no longer available).
- Each price book contains zero or more entries (represented by PricebookEntry records) that specify the products that are associated with the price book. A price book entry defines the price for which you sell a product at a particular currency.

These objects are defined only for those orgs that have products enabled as a feature. If the org doesn't have the products feature enabled, the Pricebook2 object doesn't appear in the `describeGlobal()` call, and you can't access it via the API.

If you delete a Pricebook2 while a line item references PricebookEntry in the price book, the line item is unaffected, but the Pricebook2 is archived and unavailable from the API.

For a visual diagram of the relationships between Pricebook2 and other objects, see [Product and Schedule Objects](#).

Price Book Setup

The process of setting up a price book via the API usually means:

1. Load product data into Product2 records (creating one Product2 record for each product that you want to add).
2. For each Product2 record, create a PricebookEntry that links the Product2 record to the standard Pricebook2. Define a standard price for a product at a given currency (if you have multicurrency enabled) before defining a price for that product in the same currency in a custom price book.
3. Create a Pricebook2 record to represent a custom price book.
4. For each Pricebook2 record, creating a PricebookEntry for every Product2 that you want to add, specifying unique properties for each PricebookEntry (such as the `UnitPrice` and `CurrencyIsoCode`) as needed.

Code Sample—Java

```
public void pricebookSample() {
    try {
        //Create a custom pricebook
        Pricebook2 pb = new Pricebook2();
        pb.setName("Custom Pricebok");
        pb.setIsActive(true);
        SaveResult[] saveResults = connection.create(new SObject[]{pb});
        pb.setId(saveResults[0].getId());

        // Create a new product
        Product2 product = new Product2();
        product.setIsActive(true);
        product.setName("Product");
        saveResults = connection.create(new SObject[]{product});
    }
}
```

```

product.setId(saveResults[0].getId());

// Add product to standard pricebook
QueryResult result = connection.query(
    "select Id from Pricebook2 where isStandard=true"
);
SObject[] records = result.getRecords();
String stdPbId = records[0].getId();

// Create a pricebook entry for standard pricebook
PricebookEntry pbe = new PricebookEntry();
pbe.setPricebook2Id(stdPbId);
pbe.setProduct2Id(product.getId());
pbe.setIsActive(true);
pbe.setUnitPrice(100.0);
saveResults = connection.create(new SObject[]{pbe});

// Create a pricebook entry for custom pricebook
pbe = new PricebookEntry();
pbe.setPricebook2Id(pb.getId());
pbe.setProduct2Id(product.getId());
pbe.setIsActive(true);
pbe.setUnitPrice(100.0);
saveResults = connection.create(new SObject[]{pbe});
} catch (ConnectionException ce) {
    ce.printStackTrace();
}
}

```

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

Pricebook2ChangeEvent (API version 48.0)

Change events are available for the object.

Pricebook2History

History is available for tracked fields of the object.

Pricebook2History

Represents historical information about changes that have been made to the standard fields of the associated Pricebook2, or to any custom fields with history tracking enabled. This object is available in API version 66.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Special Access Rules

This object is always read-only.

Fields

Field	Details
Pricebook2Id	Type reference Properties Filter, Group, Sort Description ID of the Pricebook2 associated with this record. This is a relationship field. Relationship Name Pricebook2 Relationship Type Lookup Refers To Pricebook2
DataType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Data type of the field that was changed.
Field	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Name of the price book field that was modified, or a special value to indicate some other modification to the price book.
IsDeleted	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). This is a standard system field. Label is Deleted .
NewValue	Type anyType Properties Nillable, Sort Description New value of the modified price book field. Maximum of 255 characters.
OldValue	Type anyType Properties Nillable, Sort Description Previous value of the modified price book field. Maximum of 255 characters.

Usage

Price book history entries are indirectly created each time a price book is modified.

Two rows are added to this record when foreign key fields change. One row contains the foreign key object names that display in the online application. For example, `Jane Doe` is recorded as the name of a Contact. The other row contains the actual foreign key ID that is only returned to and visible from the API.

This object respects field level security on the parent object.

SEE ALSO:

[Pricebook2](#)

PricebookEntry

Represents a product entry (an association between a Pricebook2 and Product2) in a price book.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

 **Note:** Salesforce Object Search Language (SOSL) allows you to search records across standard and custom objects. When filtering records in the PriceBookEntry object using SOSL, you can only sort by fields related to Product2.

Field	Details
ActivePriceAdjustmentQuantity	Type int Properties Filter, Group, Nillable, Sort Description The count of active price adjustment schedules associated with the price book entry. This field is available in API version 49.0 and later. This field is available with a B2B or D2C Commerce license.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort Description Available only for organizations with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this price book entry is active (<code>true</code>) or not (<code>false</code>). Although you can never delete PricebookEntry records, your client application can set this flag to <code>false</code>. Inactive PricebookEntry records are hidden in many areas in the user interface. You can change this flag on a PricebookEntry record as often as necessary.
IsArchived	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the PricebookEntry has been archived (<code>true</code>) or not (<code>false</code>). This field is set to <code>true</code> when the Product2 record it's associated with is archived, or when the Pricebook2 record is archived. This field is read only. Available in API version 45.0 and later. Label is Archived.

Field	Details
Name	Type string Properties Filter, Group, Nillable, Sort Description Name of this PricebookEntry record. This read-only field references the value in the Name field of the Product2 record. Label is Product Name.
Pricebook2Id	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the Pricebook2 record with which this record is associated. This field must be specified when creating Pricebook2 records. It can't be changed in an update. This field is a relationship field. Relationship Name Pricebook2 Relationship Type Lookup Refers To Pricebook2
Product2Id	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the Product2 record with which this record is associated. This field must be specified when creating Product2 records. It can't be changed in an update. This is a relationship field. Relationship Name Product2 Relationship Type Lookup Refers To Product2
ProductCode	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description Product code for this record. This read-only field references the value in the ProductCode field of the associated Product2 record.
ProductSellingModelId	Type reference Properties Create, Filter, Group, Sort Description The ID of the related product selling model. This field is available in API version 55.0 and later. This field is available when Subscription Management is enabled. Relationship Name ProductSellingModel Relationship Type Lookup Refers To ProductSellingModel
UnitPrice	Type currency Properties Create, Filter, Sort, Update Description Required. Unit price for this price book entry. You can specify a value only if <code>UseStandardPrice</code> is set to <code>false</code>. Label is List Price.
UseStandardPrice	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this price book entry uses the standard price defined in the standard Pricebook2 record (<code>true</code>) or not (<code>false</code>). If set to <code>true</code>, then the <code>UnitPrice</code> field is read-only, and the value is the same as the <code>UnitPrice</code> value in the corresponding PricebookEntry in the standard price book (that is, the PricebookEntry record whose <code>Pricebook2Id</code> refers to the standard price book and whose <code>Product2Id</code> and <code>CurrencyIsoCode</code> are the same as this record). For PricebookEntry records associated with the standard Pricebook2 record, this field must be set to <code>true</code>.

Usage

Use this object to define the association between your organization’s products (Product2) and your organization’s standard price book or to custom price books (Pricebook2). Create one PricebookEntry record for each standard or custom price and currency combination for a product in a Pricebook2.

When creating these records, you must specify the IDs of the associated Pricebook2 record and Product2 record. Once these records are created, your client application can’t update these IDs.

This object is defined only for those organizations that have products enabled as a feature. If the organization doesn’t have the products feature enabled, then the PricebookEntry object doesn’t appear in the describeGlobal call, and you can’t access it.

If you delete a PriceBookEntry that is referenced by a line item, the line item is unaffected, but the PriceBookEntry is archived and unavailable from the API. Deleted PriceBookEntry records can’t be recovered.

You must load the standard price for a product before you’re permitted to load its custom prices.

Associated Objects

This object has the following associated objects. Unless otherwise noted, they’re available in the same API version as this object.

PricebookEntryChangeEvent(API version 57.0)

Change events are available for the object.

PricebookEntryHistory

History is available for tracked fields of the object.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

PricebookEntryAdjustment

Read-only junction object created when you associate a price adjustment schedule with a price book entry. This object is available in API version 47.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available only if the B2B Commerce license is enabled.

Fields

Field	Details
Name	Type string

Field	Details
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description For internal use only.
PriceAdjustmentScheduleId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The ID of the price book entry adjustment.
PricebookEntryId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The ID of the price book entry that this price book entry adjustment is associated with.

SEE ALSO:

[PriceAdjustmentSchedule](#)

PriceProtectionExecution

Represents an instance of running the price protection process, capturing execution time, status, and the effective date of price changes. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ExecutionJobId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description Data processing engine instance responsible for creating price protection records. This field is a relationship field. Relationship Name ExecutionJob Refers To BatchCalcJobDefinition
ExecutionReferenceNumber	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description Unique reference number generated by the Data Processing Engine for this execution. This can be used to associate related line items to the same execution.
LastExecutionTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date and time when the price protection execution was last performed by the Data Processing Engine.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the record was last referenced. This is used internally to optimize performance and user experience.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Date and timestamp when the record was last viewed in the Salesforce UI. Helps track user engagement.

Field	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Auto-generated name for the price protection execution record. Used as the primary identifier within the system.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Identifier for the user or group that owns this record. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
PriceChangeEffectiveDate	Type date Properties Create, Filter, Group, Sort, Update Description Date when the new price goes into effect as part of the price protection execution.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Represents the current lifecycle status of the price protection execution process. Possible values are: - Completed - New - Processing

PriceProtectExecLineItem

Represents a line item created as part of a Price Protection Execution. This object is available in API version 63.0 and later.

A PriceProtectExecLineItem record is automatically generated by the Data Processing Engine when eligible product transactions are processed for price protection. It links to execution records, products, and pricing terms, and stores per-unit pricing, eligibility, and calculation details.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Sort, Update Description References the partner account related to the transaction being evaluated for price protection. This field is a relationship field. Relationship Name Account Refers To Account
CalculatedAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description Total protected amount calculated based on the applicable price difference and quantity.
CalculationReferenceRecordId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description References the rebate or pricing rule used to compute the claim. This field is a relationship field.

Field	Details
	Relationship Name CalculationReferenceRecord
	Refers To ProgramRebateType
ClaimReferenceId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Links to the related rebate claim, if one has been generated. This field is a polymorphic relationship field.
	Relationship Name ClaimReference
	Refers To RebateClaim
HasWarnings	Type boolean
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description Indicates if the execution line item has associated warnings. The default value is <code>false</code> .
InTransitQuantity	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description Quantity of the product in transit.
IsEligible	Type boolean
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description Indicates whether the record qualifies for price protection. The default value is <code>false</code> .

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the record was last referenced by a user or system.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Date and timestamp when the record was last opened in the UI.
LocationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description References the inventory or sales location relevant to the line item. This field is a relationship field. Relationship Name Location Refers To Location
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Auto-generated identifier for the line item record.
NewSalePricePerUnit	Type currency Properties Create, Filter, Nillable, Sort, Update Description The new sale price per unit after the price change.

Field	Details
NewSalePriceType	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Type of sale price applied post-adjustment (e.g., List Price, Net Price).
PriceDifference	Type currency Properties Filter, Nillable, Sort Description Difference between the old and new sale price per unit. This field is a calculated field.
PriceProtectionExecutionId	Type reference Properties Create, Filter, Group, Sort Description Links to the parent Price Protection Execution record. This field is a relationship field. Relationship Name PriceProtectionExecution Relationship Type Master-detail Refers To PriceProtectionExecution (the master object)
PriceProtectionTermId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description References the Price Protection Term used for evaluating eligibility and calculations. This field is a relationship field. Relationship Name PriceProtectionTerm Refers To PriceProtectionTerm

Field	Details
ProductId	Type reference Properties Create, Filter, Group, Sort, Update Description References the product involved in the price protection claim. This field is a relationship field. Relationship Name Product Refers To Product2
RemainingQuantity	Type double Properties Create, Filter, Sort, Update Description Quantity of product still eligible for claim after partial adjustments.
SalePricePerUnit	Type currency Properties Create, Filter, Sort, Update Description Original sale price per unit before the price adjustment.
SalePriceType	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Type of sale price recorded during the original transaction.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Current processing state of the line item. Possible values are: • Complete

Field	Details
	• Error • New • ReadyForClaim—Ready For Claim • ReadyForPricing—Ready For Pricing • ReadyForSimulation—Ready For Simulation
StatusReason	Type string Properties Create, Filter, Nillable, Sort, Update Description Additional explanation or message associated with the current status.
TransactionDate	Type date Properties Create, Filter, Group, Sort, Update Description Date when the original sale or transaction occurred.
TransactionReferenceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Reference to the transaction record from which this line item originates. This field is a polymorphic relationship field. Relationship Name TransactionReference Refers To PartnerUnsoldInventory
WarningMessage	Type string Properties Create, Filter, Nillable, Sort, Update Description Descriptive warning associated with this line item, if applicable.

PriceProtectionTerm

Represents a configuration record that defines the rules, types, and eligible conditions for price protection. This object is available in API version 63.0 and later.

A PriceProtectionTerm record is referenced during claims processing to calculate supported price and quantity adjustments based on predefined terms.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
CalculationReferenceRecordId	Type reference Properties Create, Filter, Group, Sort, Update Description Rebate type that's applicable for the claim amount calculation. This field is a relationship field. Relationship Name CalculationReferenceRecord Refers To ProgramRebateType
IsPayable	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the inventory is eligible for payment or refund after a price protection adjustment. The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the record was last referenced by the current user. Useful for activity tracking.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Date and the timestamp when the record was last viewed by the user. Helps in understanding record engagement.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Unique name for the Price Protection Term. This is typically used as a primary identifier for UI display or business logic.
NewSalePriceType	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Defines the type of new sale price applicable after a price protection scenario. This helps classify how the adjusted sale price can be handled.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Identifier for the user or group who owns the record. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User

Field	Details
PriceProtectionType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Defines the type of price protection applied. Possible values are: • PriceProtection—Price Protection • ReversePriceProtection—Reverse Price Protection The default value is PriceProtection.
SalePriceType	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Specifies the type of sale price before price protection is applied. This helps calculate the protection delta during claim processing.
SupportedPricePercent	Type percent Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description Indicates the percentage of the price that is supported for price protection. Helps calculate eligible claim amounts.
SupportedQuantityPercent	Type percent Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description Indicates the percentage of quantity that is eligible for price protection. Used to determine prorated reimbursement.

PrivacyHold

Represents a Privacy Hold that indicates that a record should be preserved from masking or deletion by Data Management policies in Privacy Center. This object is available in API version 59.0 and later.

Use Privacy Hold with Data Management policies in Privacy Center. Add a condition to your policy to exclude records with an active Privacy Hold status from masking or deletion actions.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available for users with the Privacy Center license and the Manage Privacy Hold user permission.

Fields

Field	Details
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date the Privacy Hold ends.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if Privacy Hold is active on the record. The default value is <code>false</code> .
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the Privacy Hold.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of the account associated with this customer. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PrivacyHoldReasonId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the associated Privacy Hold Reason. This field is a relationship field. Relationship Name PrivacyHoldReason Relationship Type Lookup Refers To PrivacyHoldReason
ReferenceRecordId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort, Update
	Description The ID of the record marked for the Privacy Hold. This field is a polymorphic relationship field.
	Relationship Name ReferenceRecord
	Relationship Type Lookup
	Refers To Account, Contact, Individual, Lead, User
ReferenceRecordType	Type picklist
	Properties Filter, Group, Restricted picklist, Sort
	Description The type of object the record with the Privacy Hold is associated with. Possible values are: • Account • Contact • Individual • Lead • User
RegisteredDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date the Privacy Hold was added to the record.

PrivacyHoldReason

Represents the business or legal purpose for why a record has a Privacy Hold. This object is available in API version 59.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available for users with the Privacy Center license and the Manage Privacy Hold user permission.

Fields

Field	Details
Detail	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The details of the Privacy Hold Reason, such as the business or legal purpose for the hold.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the Privacy Hold Reason.
OwnerId	Type reference

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the owner of the account associated with this customer. This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User

PrivacyJobSession

Represents the status of past, ongoing, and scheduled policy jobs in Privacy Center. This object is available in API version 59.0 and later. This object is Read-only.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is available for users with the Privacy Center license and the Manage Privacy Center Policies user permission.

Fields

Field	Details
<code>CreationDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The date and time the policy job was created.
<code>CurrentObject</code>	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The name of the object that the policy job is currently processing.
EndTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time the policy job finished executing.
FailureLog	Type textarea Properties Nillable Description The description of why the policy job failed to execute.
JobStartType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description How the policy job session was started. Possible values are: • manual • scheduled
JobStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Represents the status of the policy job session. Possible values are: • cancelled • completed • failures • inactive • running • running_next

Field	Details
	• scheduled • suspended
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Represents the job session record. This is a serialized, automatically generated number field.
OptionsProcessingFailed	Type boolean Properties Filter Description Indicates that the policy job session failed to process the records with the deletion or masking rules in the policy.
OptionsTraversalComplete	Type boolean Properties Filter Description Indicates that the policy job session was completed without errors.
OptionsTraversalFailed	Type boolean Properties Filter Description Indicates that the policy job session was completed with errors.
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the owner of the account associated with this customer. This field is a polymorphic relationship field. Relationship Name Owner

Field	Details
	Relationship Type Lookup
	Refers To Group, User
PolicyDescription	Type string
	Properties Filter, Group, Nillable, Sort
	Description The description of the policy the job session is associated with.
PolicyName	Type string
	Properties Filter, Group, Nillable, Sort
	Description The name of the policy the job session is associated with.
PolicyType	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description The type of policy the job session is associated with. Possible values are: • <code>datamanagement</code>—Data Management. • <code>datamask</code>—This policy type is reserved for future use. • <code>rtbf</code>—Right to Be Forgotten.
PrivacyPolicyDefinitionId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description The ID of the policy the job session is executing for. This field is a relationship field.
	Relationship Name PrivacyPolicyDefinition
	Relationship Type Lookup

Field	Details
	Refers To PrivacyPolicyDefinition
PrivacyRtbfRequestId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the Right to Be Forgotten request the policy job is executing for. This field is a relationship field. Relationship Name PrivacyRtbfRequest Relationship Type Lookup Refers To PrivacyRTBFRequest
ScheduledTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time the policy job session is scheduled to run.
SerializedPolicy	Type textarea Properties Nillable Description The serial ID of a snapshot of the policy the job session is for. A snapshot of the policy is taken to maintain consistent metadata for the policy the job is for, in case changes are made to the policy while the job is executing.
StartTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time the policy job session started executing.

Associated Objects

This object has the following associated objects. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

[PrivacyJobSessionOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[PrivacyJobSessionShare](#) on page 67

Sharing is available for the object.

PrivacyObjectSession

Represents the status of each object being processed in past, ongoing, and scheduled policy jobs in Privacy Center. This object is available in API version 59.0 and later.

See the status of each object as a policy executes. For example, if a Data Management policy includes an Account object and a Contact object, then a PrivacyObjectSession record is created for each object.

Each object in a policy has five potential queues to enter. The first queue captures and stores records targeted by the policy filters. If the first queue run fails to capture every record, then the object goes through three retry attempts to capture the remaining records. The fifth queue stores the record IDs of any records that weren’t captured in any of the four attempts.

This object is Read-only.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is available for users with the Privacy Center license and the Manage Privacy Center Policies user permission.

Fields

Field	Details
CurrentEntity	Typestring PropertiesFilter, Group, Nillable, Sort DescriptionThe name of the object in the policy.
Name	Typestring PropertiesAutonumber, Defaulted on create, Filter, idLookup, Sort

Field	Details
	Description Represents the job session record. This is a serialized, automatically generated number field.
ObjectFailureLog	Type textarea Properties Nillable Description This field is reserved for later use.
ObjectStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The policy execution status for the object. Possible values are: - processing_completed - processing_failed - processing_ongoing - processing_pending - traversal_completed - traversal_failed - traversal_ongoing
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the owner of the account associated with the customer that the policy was executed for. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Field	Details
PolicyNode	Type string Properties Filter, Group, Nillable, Sort Description The ID of the object in the serialized policy. This field associates the object session in the policy execution with the coordinating object in the Privacy Center policy.
Position	Type int Properties Filter, Group, Nillable, Sort Description Represents a record's position in the batch queue for the object being processed.
PrivacyJobSessionObjectId	Type reference Properties Filter, Group, Sort Description The ID of the policy job session. This field is a relationship field. Relationship Name PrivacyJobSessionObject Relationship Type Lookup Refers To PrivacyJobSession
ProcessType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of action being executed on the object in the policy. Possible values are: • delete • mask • retry_delete • retry_mask

Field	Details
ProcessedFailures	Type int Properties Filter, Group, Nillable, Sort Description The number of records the policy execution failed to process.
ProcessedSuccesses	Type int Properties Filter, Group, Nillable, Sort Description The number of records the policy execution successfully processed.
ProcessedTotal	Type int Properties Filter, Group, Nillable, Sort Description The total number of records processed in the policy job.
Processor	Type string Properties Filter, Group, Nillable, Sort Description The name of the deletion, masking, or traversal processor executing the policy job.
Queue	Type string Properties Filter, Group, Nillable, Sort Description This field is reserved for later use.
QueueLength	Type int Properties Filter, Group, Nillable, Sort Description The total number of records in the queue to be processed by the policy job.

Field	Details
RecordsAffected	Type int Properties Filter, Group, Nillable, Sort Description The number of records processed by the policy job.
Retry	Type int Properties Filter, Group, Nillable, Sort Description The queue number of the retry session after a failed policy execution attempt. Each attempt to retry the policy execution is put into a retry queue.
TraversalEndTime	Type dateTime Properties Filter, Nillable, Sort Description The end time of the record-capturing phase for the object session.
TraversalStartTime	Type dateTime Properties Filter, Nillable, Sort Description The start time of the record-capturing phase for the object session.
UniqueConstraint	Type string Properties Filter, Group, idLookup, Nillable, Sort Description For internal use only.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[PrivacyObjectSessionOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[PrivacyObjectSessionShare](#) on page 67

Sharing is available for the object.

PrivacyRequest

See details and monitor the status of Data Subject Access Requests made in Privacy Center. This object is available in API version 54.0 and later.

Supported Calls

```
create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()
```

Special Access Rules

This object is for Privacy Center customers with the ReadAllData or PrivacyDataAccess permissions.

Fields

Field	Details
CompletedDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time when the request was completed.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the Privacy Request.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of the account associated with this customer. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
RelatedRecord	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The Data Subject Access Request (DSAR) or Right to Be Forgotten request (RTBF) record related to the request.
StartedDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time when the request was started.

Field	Details
Status	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Represents the status of the request. Possible values are: • Approved • Cancelled • Completed • Created • In Progress • Rejected
TargetRecord	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The record that is listed in the request.
Type	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Represents the type of request that was made. Possible values are: • DSAR • GlobalOptOut • RTBF

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[PrivacyRequestFeed](#) on page 55

Feed tracking is available for the object.

PrivacyRequestHistory on page 63

History is available for tracked fields of the object.

PrivacyRequestOwnerSharingRule on page 65

Sharing rules are available for the object.

PrivacyRequestShare on page 67

Sharing is available for the object.

Usage

In API version 66.0 and later, users can click **New Privacy Request** to create privacy requests directly from the Privacy Requests page. This action supports Right to Be Forgotten (RTBF) request types. The New Privacy Request button uses a custom dialog based on search criteria defined in Setup. The standard New button uses the default record creation dialog. To streamline the user interface and avoid redundancy, hide the standard New button.

PrivacyRTBRequest

Represents a Right to Be Forgotten Request made in Privacy Center. This object is available in API version 59.0 and later.

Supported Calls

```
create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()
```

Special Access Rules

This object is available for users with the Privacy Center license and the Manage Privacy Center Policies user permission.

Fields

Field	Details
Description	Typestring PropertiesCreate, Filter, Group, Nillable, Sort, Update DescriptionThe description of the customer’s Right to Be Forgotten request.
JobRecord	Typestring PropertiesCreate, Filter, Group, Sort, Update DescriptionThe record ID that is processed by the Right to Be Forgotten request.

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the Right to Be Forgotten request.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of the account associated with this customer. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PolicyNameId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The name of the Right to Be Forgotten policy applied to this request. This field is a relationship field. Relationship Name PolicyName Relationship Type Lookup Refers To PrivacyPolicyDefinition
Status	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Represents the status of the request. Possible values are: • Cancelled • Complete • Error • Pending • Scheduled

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[PrivacyRTBFRequestHistory](#) on page 63

History is available for tracked fields of the object.

[PrivacyRTBFRequestOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[PrivacyRTBFRequestShare](#) on page 67

Sharing is available for the object.

PrivacySessionRecordFailure

Represents error messages encountered during policy job executions in Privacy Center. This object is available in API version 59.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is available for users with the Privacy Center license and the Manage Privacy Center Policies user permission.

Fields

Field	Details
ErrorMessage	Type textarea Properties Nillable Description The description of the error encountered during the policy job execution.
ErrorType	Type string Properties Filter, Group, Nillable, Sort Description The type of error encountered during the policy job execution.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Represents the job session record. This is a serialized, automatically generated number field.
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the owner of the account associated with the customer that the policy was executed for. This field is a polymorphic relationship field. Relationship Name Owner

Field	Details
	Relationship Type Lookup
	Refers To Group, User
PrivacyObjectSessionId	Type reference
	Properties Filter, Group, Sort
	Description The ID of the object in the policy job session. This field is a relationship field.
	Relationship Name PrivacyObjectSession
	Relationship Type Lookup
	Refers To PrivacyObjectSession
RecordIdNumber	Type string
	Properties Filter, Group, Nillable, Sort
	Description The ID of the record that failed to be processed by the policy job.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[PrivacySessionRecordFailureOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[PrivacySessionRecordFailureShare](#) on page 67

Sharing is available for the object.

Problem

Problems represent the root cause data of one or more incidents. This object contains all the details of a problem, documenting the history of the problem from detection to closure. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Category	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The type of problem. Administrators set field values.
Description	Type textarea Properties Create, Nillable, Update Description A description of the problem. This field can store up to 32 KB of data, but only the first 255 characters appear in reports.
Impact	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The problem's impact. Possible values are: • High • Low • Medium The default value is 'High'.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time (in UTC) when the current user last accessed this record, a record related to this record, or a list view.

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time (in UTC) when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view. (LastReferencedDate) but not viewed it.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description This is a polymorphic relationship field that represents the user or group assigned to resolve the problem. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ParentProblemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of a problem above one or more related problems in a problem hierarchy. This is a relationship field. Relationship Name ParentProblem Relationship Type Lookup Refers To Problem
Priority	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description The impact and urgency of the problem. Possible values are: • Critical • High • Low • Moderate The default value is 'Critical'.
PriorityOverrideReason	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The reason why the priority should be changed or edited.
ProblemNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The unique, system-generated problem number.
ResolutionDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time (in UTC) when the problem was resolved.
ResolutionSummary	Type textarea Properties Create, Nillable, Update Description A description of the steps needed to resolve the incident.
ResolvedById	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The ID of the user who resolved the problem. This is a relationship field. Relationship Name ResolvedBy Relationship Type Lookup Refers To User
RootCauseSummary	Type textarea Properties Create, Nillable, Update Description A description of the problem resolution or root cause. This field can store up to 32 KB of data, but only the first 255 characters display in reports.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Any custom or granular stages customers wants to track. This will be a dependent picklist. Possible values are: • Closed • Fix in Progress • Known Error • New • Open • Pending Change • Resolved • Root Cause Analysis • Work In Progress The default value is 'New'.
StatusCode	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description The status of the problem. Possible values are: • Closed • FixInProgress • KnownError • New • Open • PendingChange • Resolved • RootCauseAnalysis • WorkInProgress The default value is 'New'.
SubCategory	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The type of problem. One level deeper than Category. Administrators set field values.
Subject	Type string Properties Create, Filter, Group, Sort, Update Description A brief description of the problem.
Urgency	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description A measure of how long a resolution can be delayed until an incident, problem, or change has a significant business impact. Possible values are: • High • Low • Medium The default value is 'High'.

ProblemIncident

Represents a junction object that relates a Problem to an Incident. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
IssueId	Type reference Properties Create, Filter, Group, Sort Description A polymorphic relationship field that represents a related Problem or Incident. This field is a polymorphic relationship field. Relationship Name Issue Relationship Type Lookup Refers To Incident, Problem
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The auto-generated ID of the incident that's related to the problem.
RelatedEntityType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The object type of the related entity. Possible values are: • Incident

Field	Details
	• Problem
RelatedIssueId	Type reference Properties Create, Filter, Group, Sort Description A polymorphic relationship field that represents a related Problem or Incident. This field is a polymorphic relationship field. Relationship Name RelatedIssue Relationship Type Lookup Refers To Incident, Problem
RelationshipType	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Shows how the Problem and Incident records relate to each other. Possible values are: • Caused By • Similar The default value is Caused By.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ProblemIncidentChangeEvent](#) on page 68

Change events are available for the object.

[ProblemIncidentFeed](#) on page 55

Feed tracking is available for the object.

[ProblemIncidentHistory](#) on page 63

History is available for tracked fields of the object.

ProblemRelatedItem

Represents a junction object that relates a Problem to an Asset. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AssetId	Type reference Properties Create, Filter, Group, Sort Description The Asset ID that's linked to the Problem. This field is a relationship field. Relationship Name Asset Relationship Type Lookup Refers To Asset
Comment	Type textarea Properties Create, Nillable, Update Description A description of the problem as it relates to the item.
ImpactLevel	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The related item's impact on the problem. Possible values are: • High

Field	Details
	• Low • Medium The default value is High.
ImpactType	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The effect of the problem-related item on business operations. Possible values are: • Business-Blocking • Not Business-Blocking • Partially Business-Blocking The default value is Business-Blocking.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The auto-generated ID of the problem-related item.
ProblemId	Type reference Properties Create, Filter, Group, Sort Description The Problem ID that's related to the Asset. This field is a relationship field. Relationship Name Problem Relationship Type Lookup Refers To Problem

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ProblemRelatedItemChangeEvent](#) on page 68

Change events are available for the object.

[ProblemRelatedItemFeed](#) on page 55

Feed tracking is available for the object.

[ProblemRelatedItemHistory](#) on page 63

History is available for tracked fields of the object.

ProcessDefinition

Represents the definition of a single approval process.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`, `search()`

Portal and communities users with the Customer Community Plus and Partner Community licenses can access this object. All users in org with approvals enabled have read access to ProcessDefinition.

Fields

Field	Details
Description	Type textarea Properties Filter, Nillable, Sort Description A description of this process, with a maximum of 3,000 characters.
DeveloperName	Type string Properties Filter, Group, Sort Description The unique process name, used internally.
LockType	Type picklist Properties Filter, Group, Restricted picklist, Sort

Field	Details
	Description The type of lock applied to the record being approved. When a record is in the approval process, it's always locked, and only an administrator can edit it. However, the currently assigned approver can also be allowed to edit the record. • Total • Admin • Owner • Workitem • Node • none
Name	Type string Properties Filter, Group, idLookup, Sort Description The external name of the process; the name seen by users.
State	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The current state of this process. • Active • Inactive • Obsolete
TableEnumOrId	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Specifies the object associated with the approval process, such as Account or Contact.
Type	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The type of this process.

Field	Details
	- Approval Process—Used to control the action taken for a record. - State-based Process—Used internally to track various control processes, such as for developing Salesforce Knowledge articles.

Usage

Use this object to read the description of an approval process. The definition is read-only.

ProcessException

Represents a business exception, such as a processing failure on an order summary. A separate process is required to resolve the failure that caused the process exception before processing can continue. This object is available in API version 50.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
<code>AttachedToId</code>	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the object associated with the ProcessException. This field is a polymorphic relationship field. Relationship Name AttachedTo Relationship Type Lookup Refers To AsyncOpSyndicationFeedFile, AsyncOperationTracker CreditMemo, FulfillmentOrder, Invoice, Order, OrderItem, OrderItemSummary, OrderPaymentSummary, OrderSummary, Payment, PaymentAuthorization, Refund, ReturnOrder
<code>CaseId</code>	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the case associated with the ProcessException. This field is a relationship field. Relationship Name Case Relationship Type Lookup Refers To Case
Category	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description ProcessingException type. You can customize the category picklist to represent your business processes. Possible values are: • Fulfillment • Invoicing • Order Activation • Order Approval • Order To Asset • Order Item Summary To Asset • Order To Billing Schedule • Payment The default value is Order Activation.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for the currency of the OrderSummary associated with the ProcessException. Possible values are: • DKK—Danish Krone • EUR—Euro

Field	Details
	• GBP—British Pound • USD—U.S. Dollar The default value is USD.
Description	Type textarea Properties Create, Nillable, Update Description Detailed description of the ProcessException.
ExternalReference	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of external entities associated with the ProcessException.
FlowOrchestrationInstRelaObj	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The flow orchestration instance related object associated with this record. This field is a relationship field. Relationship Name FlowOrchInstRelaObj Relationship Type Lookup Refers To FlowOrchestrationInstRelaObj
GroupById	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID used in the entity to group exceptions, such as the Async Operation Tracker. This field is a polymorphic relationship field. Relationship Name GroupBy

Field	Details
	Refers To AsyncOperationTracker
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp for when the current user last viewed this record. A null value can mean that this record has only been referenced (LastReferencedDate) and not viewed.
Message	Type string Properties Create, Filter, Group, Sort, Update Description Short description of the ProcessException
OrderSummaryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the OrderSummary associated with the ProcessException. The ProcessException component is displayed on this OrderSummary. This field is a relationship field. Relationship Name OrderSummary Relationship Type Lookup Refers To OrderSummary

Field	Details
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the User who currently owns this ProcessException. Default value is the User who created the record. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
Priority	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Resolution priority for the ProcessException. You can customize the priority picklist to represent your business processes. Possible values are: • High • Low The default value is Low.
ProcessExceptionNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The unique name of the ProcessException, formatted as PE-(00000000).
Severity	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description Severity of the ProcessException. Each severity value corresponds to one severity category. You can customize the severity picklist to represent your business processes. If you customize the severity picklist, include at least one severity value for each severity category. Possible values are: • High • Low The default value is High.
SeverityCategory	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Severity category of the ProcessException. Each severity category corresponds to one or more severity values. The severity category is used to show the severity icon in the ProcessException list view. Possible values are: • HIGH • LOW • MEDIUM
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Status of the ProcessException. Each status corresponds to one status category, shown here in parentheses. You can customize the status picklist to represent your business processes. If you customize the status picklist, include at least one status value for each status category. Possible values are: • Ignored (Inactive) • New (Active) • Paused (Inactive) • Resolved (Resolved) • Triaged (Active) • Voided (Inactive) The default value is New.

Field	Details
StatusCategory	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Status category of the ProcessException. Each status category corresponds to one or more statuses. Possible values are: • ACTIVE • INACTIVE • RESOLVED

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProcessExceptionChangeEvent (API version 62.0)

Change events are available for the object.

ProcessExceptionOwnerSharingRule

Sharing rules are available for the object.

ProcessExceptionOwnerSharingRule

Sharing rules are available for the object.

ProcessFlowMigration

Represents a process's migrated criteria and the resulting migrated flow. This object is available in API version 58.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
DeveloperName	Type string Properties Filter, Group, Sort

Field	Details
	Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Lanaguage of the <code>MasterLabel</code>. Possible values are: • <code>af</code>—Afrikaans • <code>am</code>—Amharic • <code>ar</code>—Arabic • <code>ar_AE</code>—Arabic (United Arab Emirates) • <code>ar_BH</code>—Arabic (Bahrain) • <code>ar_DZ</code>—Arabic (Algeria) • <code>ar_EG</code>—Arabic (Egypt) • <code>ar_IQ</code>—Arabic (Iraq) • <code>ar_JO</code>—Arabic (Jordan) • <code>ar_KW</code>—Arabic (Kuwait) • <code>ar_LB</code>—Arabic (Lebanon) • <code>ar_LY</code>—Arabic (Libya) • <code>ar_MA</code>—Arabic (Morocco) • <code>ar_OM</code>—Arabic (Oman) • <code>ar_QA</code>—Arabic (Qatar) • <code>ar_SA</code>—Arabic (Saudi Arabia) • <code>ar_SD</code>—Arabic (Sudan) • <code>ar_SY</code>—Arabic (Syria) • <code>ar_TN</code>—Arabic (Tunisia) • <code>ar_YE</code>—Arabic (Yemen) • <code>bg</code>—Bulgarian • <code>bn</code>—Bengali • <code>bs</code>—Bosnian • <code>ca</code>—Catalan • <code>cs</code>—Czech • <code>cy</code>—Welsh • <code>da</code>—Danish

Field	Details
	• de—German • de_AT—German (Austria) • de_BE—German (Belgium) • de_CH—German (Switzerland) • de_LU—German (Luxembourg) • el—Greek • el_CY—Greek (Cyprus) • en_AE—English (United Arab Emirates) • en_AU—English (Australian) • en_BE—English (Belgium) • en_CA—English (Canadian) • en_CY—English (Cyprus) • en_DE—English (Germany) • en_GB—English (UK) • en_HK—English (Hong Kong) • en_IE—English (Ireland) • en_IL—English (Israel) • en_IN—English (Indian) • en_MT—English (Malta) • en_MY—English (Malaysian) • en_NL—English (Netherlands) • en_NZ—English (New Zealand) • en_PH—English (Philippines) • en_SG—English (Singapore) • en_US—English • en_ZA—English (South Africa) • es—Spanish • es_AR—Spanish (Argentina) • es_BO—Spanish (Bolivia) • es_CL—Spanish (Chile) • es_CO—Spanish (Colombia) • es_CR—Spanish (Costa Rica) • es_DO—Spanish (Dominican Republic) • es_EC—Spanish (Ecuador) • es_GT—Spanish (Guatemala) • es_HN—Spanish (Honduras) • es_MX—Spanish (Mexico) • es_NI—Spanish (Nicaragua)

Field	Details
	• es_PA—Spanish (Panama) • es_PE—Spanish (Peru) • es_PR—Spanish (Puerto Rico) • es_PY—Spanish (Paraguay) • es_SV—Spanish (El Salvador) • es_US—Spanish (United States) • es_UY—Spanish (Uruguay) • es_VE—Spanish (Venezuela) • et—Estonian • eu—Basque • fa—Farsi • fi—Finnish • fr—French • fr_BE—French (Belgium) • fr_CA—French (Canadian) • fr_CH—French (Switzerland) • fr_LU—French (Luxembourg) • fr_MA—French (Morocco) • ga—Irish • gu—Gujarati • haw—Hawaiian • hi—Hindi • hmn—Hmong • hr—Croatian • ht—Haitian Creole • hu—Hungarian • hy—Armenian • in—Indonesian • is—Icelandic • it—Italian • it_CH—Italian (Switzerland) • iw—Hebrew • ja—Japanese • ji—Yiddish • ka—Georgian • kk—Kazakh • kl—Greenlandic • km—Khmer

Field	Details
	• kn—Kannada • ko—Korean • lb—Luxembourgish • lt—Lithuanian • lv—Latvian • mi—Te reo • mk—Macedonian • ml—Malayalam • mr—Marathi • ms—Malay • mt—Maltese • my—Burmese • nl_BE—Dutch (Belgium) • nl_NL—Dutch • no—Norwegian • pa—Punjabi • pl—Polish • pt_BR—Portuguese (Brazil) • pt_PT—Portuguese (European) • rm—Romansh • ro—Romanian • ro_MD—Romanian (Moldova) • ru—Russian • ru_AM—Russian (Armenia) • ru_BY—Russian (Belarus) • ru_KG—Russian (Kyrgyzstan) • ru_KZ—Russian (Kazakhstan) • ru_LT—Russian (Lithuania) • ru_MD—Russian (Moldova) • ru_PL—Russian (Poland) • ru_UA—Russian (Ukraine) • sh—Serbian (Latin) • sh_ME—Montenegrin • sk—Slovak • sl—Slovene • sm—Samoan • sq—Albanian • sr—Serbian (Cyrillic)

Field	Details
	- sv—Swedish - sw—Swahili - ta—Tamil - te—Telugu - th—Thai - tl—Tagalog - tr—Turkish - uk—Ukrainian - ur—Urdu - vi—Vietnamese - xh—Xhosa - zh_CN—Chinese (Simplified) - zh_HK—Chinese (Hong Kong) - zh_MY—Chinese (Malaysia) - zh_SG—Chinese (Singapore) - zh_TW—Chinese (Traditional) - zu—Zulu
MasterLabel	Type string Properties Filter, Group, Sort Description The label for the ProcessFlowMigration.
MigratedCriteriaLabel	Type string Properties Filter, Group, Nillable, Sort Description The label of the criteria that was migrated.
MigratedCriteriaName	Type string Properties Filter, Group, Nillable, Sort Description The name of the criteria that was migrated.

Field	Details
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace of the package containing the process flow migration object.

ProcessInstance

Represents an instance of a single, end-to-end approval process. Use this and the node, step, and workitem process instance objects to create approval history reports.



Note: Exceptions apply to approval history data retrieved with this object and are available only via SOAP API. For each approval process instance that was pending when Summer '14 became available for your organization, some field values are never populated or are populated only after the rollout. Other fields are populated only after the approval process instance is next acted upon—such as when a user approves, rejects, or reassigns an approval request—after the Summer '14 rollout.

For approval process instances that were completed before the Summer '14 rollout, all Process Instance fields are automatically populated, with one exception: `CompletedDate` is never populated for approval process instances that were completed before January 1, 2013. For approval process instances that were pending during the Summer '14 rollout, all ProcessInstance fields are automatically populated, with two exceptions: `CompletedDate` and `LastActorId` are populated only after the approval process instance is complete.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
CompletedDate	Type dateTime Properties Filter, Nillable, Sort Description The completion date and time of the approval process. The <code>ElapsedTimeDay</code> , <code>ElapsedTimeHours</code> , and <code>ElapsedTimeMinutes</code> field values are calculated using <code>CompletedDate</code> .
ElapsedTimeInDays	Type double Properties Filter, Nillable, Sort

Field	Details
	Description The total elapsed time in days between when the approval process instance was started and now.
ElapsedTimeInHours	Type double Properties Filter, Nillable, Sort Description The total elapsed time in hours between when the approval process instance was started and now.
ElapsedTimeInMinutes	Type double Properties Filter, Nillable, Sort Description The total elapsed time in minutes between when the approval process instance was started and now.
LastActorId	Type reference Properties Group, Filter, Nillable, Sort Description The last actor that approved, rejected, or recalled the process. This is a relationship field. Relationship Name LastActor Relationship Type Lookup Refers To User
ProcessDefinitionId	Type reference Properties Group, Filter, Sort Description The ID of this approval process instance. This is a relationship field.

Field	Details
	Relationship Name ProcessDefinition
	Relationship Type Lookup
	Refers To ProcessDefinition
Status	Type picklist
	Properties Filter, Group, Restricted picklist, Sort
	Description The status of this approval process instance. Possible values are: • Approved • Fault • Held • NoResponse • Pending • Reassigned • Rejected • Removed • Started
SubmittedById	Type reference
	Properties Filter, Group, Nillable, Sort
	Description The ID of the user who submitted the approval process. This is a relationship field.
	Relationship Name SubmittedBy
	Relationship Type Lookup
	Refers To User
TargetObjectId	Type reference

Field**Details****Properties**

Filter, Group, Sort

Description

ID of the object affected by this approval process instance.

This is a polymorphic relationship field.

Relationship Name

TargetObject

Relationship Type

Lookup

Refers To

Account, Accreditation, ActivationTarget, Address, AlternativePaymentMethod, AssessmentIndicatorDefinition, AssessmentTask, AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskIndDefinition, AssessmentTaskOrder, Asset, AssetRelationship, AssignedResource, AuthorizationForm, AuthorizationFormConsent, AuthorizationFormDataUse, AuthorizationFormText, Award, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, Campaign, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis, CareInterventionType, CareMetricTarget, CareObservation, CareObservationComponent, CarePgmProvHealthcareProvider, CarePreauth, CarePreauthItem, CareProgram, CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee, CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider, CareProgramTeamMember, CareProviderAdverseAction, CareProviderFacilitySpecialty, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareSpecialtyTaxonomy, CareTaxonomy, Case, CodeSet, CodeSetBundle, CommSubscription, CommSubscriptionChannelType, CommSubscriptionConsent, CommSubscriptionTiming, ConsumptionRate, ConsumptionSchedule, Contact, ContactEncounter, ContactEncounterParticipant, ContactPointAddress, ContactPointConsent, ContactPointEmail, ContactPointPhone, ContactPointTypeConsent, Contract, CoverageBenefit, CoverageBenefitItem, CreditMemo, CreditMemoLine, DataStream, DataUseLegalBasis, DataUsePurpose, DelegatedAccount, DigitalSignature, DocumentChecklistItem, DuplicateRecordItem, DuplicateRecordSet, EmailMessage, EngagementChannelType, EnrollmentEligibilityCriteria, ExternalEventMapping, HealthCareDiagnosis, HealthCareProcedure, HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, Identifier, IdentityDocument, Image, IndividualApplication, Invoice, InvoiceLine, Lead, Location, LocationTrustMeasure, MarketSegment, MarketSegmentActivation, MemberPlan, MessagingEndUser, MessagingSession, MktCalculatedInsight, Opportunity, Order, OrgMetricScanResult, OrgMetricScanSummary, OtherComponentTask, PartyConsent, PaymentAuthAdjustment, PersonEducation, PersonLanguage, PersonLifeEvent, PersonName, PlanBenefit, PlanBenefitItem, ProcessException, Product2, ProductFulfillmentLocation, ProductItem, ProductItemTransaction, ProductRequest, ProductRequestLineItem, ProductRequired, ProductTransfer, ProfileSkill, ProfileSkillEndorsement, ProfileSkillUser, PromptAction, PurchaserPlan, PurchaserPlanAssn, QuickTextUsage, Quote, ReceivedDocument,

Field	Details
	ResourceAbsence, ResourcePreference, ReturnOrder, ReturnOrderItemAdjustment, ReturnOrderItemTax, ReturnOrderLineItem, ServiceAppointment, ServiceResource, ServiceResourceSkill, ServiceTerritory, ServiceTerritoryMember, ServiceTerritoryWorkType, SharingRecordCollection, SharingRecordCollectionItem, SharingRecordCollectionMember, Shift, Shipment, ShipmentItem, SkillRequirement, SocialPost, Solution, StreamingChannel, UnitOfMeasure, UserProvisioningRequest, VideoCall, VideoCallParticipant, VideoCallRecording, Visit, VisitedParty, Visitor, VolunteerProject, WorkBadgeDefinition, WorkOrder, WorkOrderLineItem, WorkType, WorkTypeGroup, WorkTypeGroupMember

Usage

Use this object to query or retrieve an approval process.

The following SOQL query returns details for all the ProcessInstanceStep records related to individual ProcessInstance records. The nested query references `Steps`, which is the child `relationshipName` for ProcessInstanceStep in the ProcessInstance object.

```
SELECT Id, (SELECT Id, StepStatus, Comments FROM Steps)
FROM ProcessInstance
```

The following SOQL query returns details for all the ProcessInstanceWorkItem records related to individual ProcessInstance records. The nested query references `Workitems`, which is the child `relationshipName` for ProcessInstanceWorkItem in the ProcessInstance object.

```
SELECT Id, (SELECT Id, ActorId, ProcessInstanceId FROM Workitems)
FROM ProcessInstance
```

ProcessInstanceHistory can help provide a unified read-only view of the ProcessInstanceStep and ProcessInstanceWorkItem objects.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

ProcessInstanceHistory

History is available for tracked fields of the object.

ProcessInstanceChangeEvent (API Version 58.0)

Change events are available for the object.

SEE ALSO:

- [ProcessInstanceHistory](#)
- [ProcessInstanceStep](#)
- [ProcessInstanceWorkitem](#)

ProcessInstanceHistory

This read-only object shows all steps and pending approval requests associated with an approval process (ProcessInstance).

Supported Calls

`describeSObjects()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Fields

Field	Details
<code>ActorId</code>	Type reference Properties Filter, Group, Sort Description ID of the user who is assigned to this ProcessInstance. This is a polymorphic relationship field. Relationship Name Actor Relationship Type Lookup Refers To Group, User
<code>Comments</code>	Type string Properties Filter, Nillable, Sort Description Comments for a ProcessInstanceStep . This field doesn't apply to ProcessInstanceWorkitem records.
<code>ElapsedTimeInDays</code>	Type double Properties Filter, Nillable, Sort Description The total time in days between when the approval process instance was started and when it was completed.
<code>ElapsedTimeInHours</code>	Type double Properties Filter, Nillable, Sort

Field	Details
	Description The total time in hours between when the approval process instance was started and when it was completed.
ElapsedTimeInMinutes	Type double Properties Filter, Nillable, Sort Description The total time in minutes between when the approval process instance was started and when it was completed.
IsPending	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the ProcessInstance is pending (<code>true</code>) or not (<code>false</code>).
OriginalActorId	Type reference Properties Filter, Group, Sort Description ID of the user who was originally assigned this ProcessInstance. This is a polymorphic relationship field. Relationship Name OriginalActor Relationship Type Lookup Refers To Group, User
ProcessInstanceId	Type reference Properties Filter, Group, Sort Description ID of the ProcessInstance. This is a relationship field.

Field	Details
	Relationship Name ProcessInstance Relationship Type Lookup Refers To ProcessInstance
ProcessNodeId	Type reference Properties Filter, Group, Nillable, Sort Description ID of this step. This is a relationship field. Relationship Name ProcessNode Relationship Type Lookup Refers To ProcessNode
RemindersSent	Type int Properties Filter, Group, Nillable, Sort Description Number of reminders that have been sent. Default is 0 (zero).
StepStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the status of the ProcessInstanceStep.
TargetObjectId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the object being approved.

Field**Details**

This is a polymorphic relationship field.

Relationship Name

TargetObject

Relationship Type

Lookup

Refers To

Account, Accreditation, ActivationTarget, Address, AlternativePaymentMethod, AssessmentIndicatorDefinition, AssessmentTask, AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskIndDefinition, AssessmentTaskOrder, Asset, AssetRelationship, AssignedResource, AuthorizationForm, AuthorizationFormConsent, AuthorizationFormDataUse, AuthorizationFormText, Award, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, Campaign, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis, CareInterventionType, CareMetricTarget, CareObservation, CareObservationComponent, CarePgmProvHealthcareProvider, CarePreauth, CarePreauthItem, CareProgram, CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee, CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider, CareProgramTeamMember, CareProviderAdverseAction, CareProviderFacilitySpecialty, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareSpecialtyTaxonomy, CareTaxonomy, Case, CodeSet, CodeSetBundle, CommSubscription, CommSubscriptionChannelType, CommSubscriptionConsent, CommSubscriptionTiming, ConsumptionRate, ConsumptionSchedule, Contact, ContactEncounter, ContactEncounterParticipant, ContactPointAddress, ContactPointConsent, ContactPointEmail, ContactPointPhone, ContactPointTypeConsent, Contract, CoverageBenefit, CoverageBenefitItem, CreditMemo, CreditMemoLine, DataStream, DataUseLegalBasis, DataUsePurpose, DelegatedAccount, DigitalSignature, DocumentChecklistItem, DuplicateRecordItem, DuplicateRecordSet, EmailMessage, EngagementChannelType, EnrollmentEligibilityCriteria, ExternalEventMapping, HealthCareDiagnosis, HealthCareProcedure, HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, Identifier, IdentityDocument, Image, IndividualApplication, Invoice, InvoiceLine, Lead, Location, LocationTrustMeasure, MarketSegment, MarketSegmentActivation, MemberPlan, MessagingEndUser, MessagingSession, MktCalculatedInsight, Opportunity, Order, OrgMetricScanResult, OrgMetricScanSummary, OtherComponentTask, PartyConsent, PaymentAuthAdjustment, PersonEducation, PersonLanguage, PersonLifeEvent, PersonName, PlanBenefit, PlanBenefitItem, ProcessException, Product2, ProductFulfillmentLocation, ProductItem, ProductItemTransaction, ProductRequest, ProductRequestLineItem, ProductRequired, ProductTransfer, ProfileSkill, ProfileSkillEndorsement, ProfileSkillUser, PromptAction, PurchaserPlan, PurchaserPlanAssn, QuickTextUsage, ReceivedDocument, ResourceAbsence, ResourcePreference, ReturnOrder, ReturnOrderItemAdjustment, ReturnOrderItemTax, ReturnOrderLineItem, ServiceAppointment, ServiceResource, ServiceResourceSkill, ServiceTerritory, ServiceTerritoryMember, ServiceTerritoryWorkType, SharingRecordCollection, SharingRecordCollectionItem, SharingRecordCollectionMember, Shift, Shipment, ShipmentItem, SkillRequirement, SocialPost, Solution, StreamingChannel, UnitOfMeasure,

Field	Details
	UserProvisioningRequest, VideoCall, VideoCallParticipant, VideoCallRecording, Visit, VisitedParty, Visitor, VolunteerProject, WorkBadgeDefinition, WorkOrder, WorkOrderLineItem, WorkType, WorkTypeGroup, WorkTypeGroupMember

Usage

This object helps you replicate the related list functionality of the Salesforce user interface for approval processes. Use `ProcessInstanceHistory` for a unified read-only view of the `ProcessInstanceStep` and `ProcessInstanceWorkItem` objects. You can't query `ProcessInstanceHistory`. Instead, you can query `ProcessInstanceHistory` by including it in a nested query on the parent `ProcessInstance` object. For example, this SOQL query returns all the `ProcessInstanceHistory` records related to individual `ProcessInstance` records. The nested query references `StepsAndWorkItems`, which is the child `relationshipName` for `ProcessInstanceHistory` in the `ProcessInstance` object.

```
SELECT Id, (SELECT Id, StepStatus, Comments FROM StepsAndWorkItems)
FROM ProcessInstance
```

This object respects field-level security on the parent object.

SEE ALSO:

[ProcessInstance](#)

[ProcessInstanceStep](#)

[ProcessInstanceWorkItem](#)

ProcessInstanceNode

Represents a step in an instance of an approval process. Compare to `ProcessNode`, which describes the step in a process definition. Use this object to retrieve approval history.



Note: Exceptions apply to approval history data retrieved with this object and are available only via SOAP API. For each approval process instance that was pending when Summer '14 became available for your organization, some field values are never populated or are populated only after the rollout. Other fields are populated only after the approval process instance is next acted upon—such as when a user approves, rejects, or reassigns an approval request—after the Summer '14 rollout.

`ProcessInstanceNode` fields are never populated for approval process instances that were completed before the Summer '14 rollout. For approval process instances that were pending during the Summer '14 rollout, all `ProcessInstanceNode` fields are populated only after the approval process instance is next acted upon after the Summer '14 rollout.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
CompletedDate	Type dateTime Properties Filter, Nillable, Sort Description The completion date and time of this step in the approval process. The <code>ElapsedTimeDay</code>, <code>ElapsedTimeHours</code>, and <code>ElapsedTimeMinutes</code> field values are calculated using <code>CompletedDate</code>.
ElapsedTimeInDays	Type double Properties Filter, Nillable, Sort Description The total time in days since this step was started.
ElapsedTimeInHours	Type double Properties Filter, Nillable, Sort Description The total time in hours since this step was started.
ElapsedTimeInMinutes	Type double Properties Filter, Nillable, Sort Description The total time in minutes since this step was started.
LastActorId	Type reference Properties Filter, Group, Nillable, Sort Description The last actor that approved or rejected this step. This is a relationship field. Relationship Name LastActor

Field	Details
	Relationship Type Lookup Refers To User
NodeStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The status of this approval instance, for example Started, Pending, or Approved.
ProcessInstanceId	Type reference Properties Filter, Group, Sort Description The approval process this step is part of. This is a relationship field. Relationship Name ProcessInstance Relationship Type Lookup Refers To ProcessInstance
ProcessNodeId	Type reference Properties Filter, Group, Sort Description The identifier for this step. This is a relationship field. Relationship Name ProcessNode Relationship Type Lookup Refers To ProcessNode

Field	Details
ProcessNodeName	Type string Properties Filter, Group, Nillable, Sort Description The name of this step. The contents of this field can be publicly viewed.

ProcessInstanceStep

Represents one work item in an approval process (ProcessInstance).

 **Note:** Exceptions apply to approval history data retrieved with this object and are available only via SOAP API. For each approval process instance that was pending when Summer '14 became available for your organization, some field values are never populated or are populated only after the rollout. Other fields are populated only after the approval process instance is next acted upon—such as when a user approves, rejects, or reassigns an approval request—after the Summer '14 rollout.

ProcessInstanceStep fields are never populated for approval process instances that were completed before the Summer '14 rollout. For approval process instances that were pending during the Summer '14 rollout, all ProcessInstanceStep fields are populated only after the approval process instance is next acted upon after the Summer '14 rollout.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
ActorId	Type reference Properties Filter, Group, Sort Description ID of the user who's assigned to this approval step. This is a polymorphic relationship field. Relationship Name Actor Relationship Type Lookup Refers To Group, User

Field	Details
Comments	Type string Properties Filter, Nillable, Sort Description Limit: 4,000 bytes. The contents of this field can be publicly viewed.
ElapsedTimeInDays	Type double Properties Filter, Nillable, Sort Description The total time in days since this step was started.
ElapsedTimeInHours	Type double Properties Filter, Nillable, Sort Description The total time in hours since this step was started.
ElapsedTimeInMinutes	Type double Properties Filter, Nillable, Sort Description The total time in minutes since this step was started.
OriginalActorId	Type reference Properties Filter, Group, Sort Description ID of the user who was originally assigned to this approval step. This is a polymorphic relationship field. Relationship Name OriginalActor Relationship Type Lookup

Field	Details
	Refers To Group, User
ProcessInstanceId	Type reference Properties Filter, Group, Sort Description ID of the ProcessInstance that this approval step belongs to. This is a relationship field. Relationship Name ProcessInstance Relationship Type Lookup Refers To ProcessInstance
StepNodeId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the node currently assigned to this approval step.
StepStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The status of this approval step. • Approved • Fault • Held • NoResponse • Pending • Reassigned • Rejected • Removed • Started

Field	Details
	If the approval step requires unanimous approval and one approver rejects the request, the value of this field for the other approvers changes to NoResponse. Likewise, if approval is based on the first response and an approver responds, the value of this field for the other approvers changes to NoResponse.

Usage

Query or retrieve a new step in an approval process (ProcessInstance).

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

ProcessInstanceStepChangeEvent (API Version 58.0)

Change events are available for the object.

SEE ALSO:

[ProcessInstance](#)

[ProcessInstanceHistory](#)

[ProcessInstanceWorkitem](#)

ProcessInstanceWorkitem

Represents a user's pending approval request.



Note: Exceptions apply to approval history data retrieved with this object and are available only via SOAP API. For each approval process instance that was pending when Summer '14 became available for your organization, some field values are never populated or are populated only after the rollout. Other fields are populated only after the approval process instance is next acted upon—such as when a user approves, rejects, or reassigns an approval request—after the Summer '14 rollout.

ProcessInstanceWorkitem fields are never populated for approval process instances that were completed before the Summer '14 rollout. For approval process instances that were pending during the Summer '14 rollout, all ProcessInstanceWorkitem fields are populated after the approval process instance is next acted upon after the Summer '14 rollout, with three exceptions. The `ElapsedTimeInDays`, `ElapsedTimeInHours`, and `ElapsedTimeInMinutes` fields are never populated in ProcessInstanceWorkitem records for which equivalent ProcessInstanceStep records were created before the Summer '14 rollout.

For all other ProcessInstanceWorkitem records, these three fields are populated after the approval process instance is next acted upon after the Summer '14 rollout.

ProcessInstanceHistory combines fields from ProcessInstanceStep and ProcessInstanceWorkitem. As a result, incorrect elapsed times of 0 can appear in ProcessInstanceHistory records because the elapsed time fields were never populated in the related ProcessInstanceWorkitem record.



Note: Knowledge articles use ProcessInstanceWorkitem records to track the article history, so ProcessInstanceWorkitems records associated with Knowledge articles can't be deleted.

Supported Calls

`delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`

Fields

Field	Details
ActorId	Type reference Properties Filter, Group, Sort, Update Description ID of the user responsible for approving an approval request. This field is a polymorphic relationship field. Relationship Name Actor Relationship Type Lookup Refers To Group, User
ElapsedTimeInDays	Type double Properties Filter, Nillable, Sort Description The total time in days since this approval request was started.
ElapsedTimeInHours	Type double Properties Filter, Nillable, Sort Description The total time in hours since this approval request was started.
ElapsedTimeInMinutes	Type double Properties Filter, Nillable, Sort Description The total time in minutes since this approval request was started.

Field	Details
OriginalActorId	Type reference Properties Filter, Group, Sort, Update Description ID of the user originally assigned this approval request. This field is a polymorphic relationship field. Relationship Name OriginalActor Relationship Type Lookup Refers To Group, User
ProcessInstanceId	Type reference Properties Filter, Group, Sort, Update Description ID of the ProcessInstance associated with this approval request. This field is a relationship field. Relationship Name ProcessInstance Relationship Type Lookup Refers To ProcessInstance

Usage

Use this object to manage a pending approval request for a user.

SEE ALSO:

[ProcessInstance](#)
[ProcessInstanceHistory](#)
[ProcessInstanceStep](#)

ProcessNode

Describes a step in a process definition. Compare to `ProcessInstanceNode`, which describes a step in a running process. This object is available in API version 31.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
Description	Type textarea Properties Filter, Nillable, Sort Description A description of this node, no longer than 3,000 bytes.
DeveloperName	Type string Properties Filter, Group, Sort Description The external name of the node that's seen by users.
Name	Type string Properties Filter, Group, idLookup, Sort Description The unique node name.
ProcessDefinitionId	Type reference Properties Filter, Group, Sort Description ID of the object affected by this approval instance. A relationship field. Relationship Name ProcessDefinition

Field	Details
	Relationship Type Lookup
	Refers To ProcessDefinition

Usage

Use this object to get details about the process node or the process definition that it's associated with.

ProducerCommission

Represents a producer's commission for an insurance policy. The commission can be calculated from the commissionable transactions or can be populated from an external system. This object is available in API version 51.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
CommissionableAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description The amount on which the commission is applied. This can be a transaction amount or a portion of the premium.
CommissionAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description The calculated commission amount for the insurance policy transaction.
CommissionScheduleId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the associated Commission Schedule, which is the commission calculation tied to the product or producer. This is a relationship field. Relationship Name CommissionSchedule Relationship Type Lookup Refers To CommissionSchedule
InsurancePolicyAssetId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The insured item for which the commission was calculated. This is a relationship field. Relationship Name InsurancePolicyAsset Relationship Type Lookup Refers To InsurancePolicyAsset
InsurancePolicyCoverageId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the policy coverage for which the commission was calculated. This is a relationship field. Relationship Name InsurancePolicyCoverage Relationship Type Lookup Refers To InsurancePolicyCoverage

Field	Details
InsurancePolicyId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The insurance policy for which the commission was calculated. This is a relationship field. Relationship Name InsurancePolicy Relationship Type Lookup Refers To InsurancePolicy
InsurancePolicyTransactionId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The transaction for which the commission record was created. This is a relationship field. Relationship Name InsurancePolicyTransaction Relationship Type Lookup Refers To InsurancePolicyTransaction
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.
MaxCommissionAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description The maximum commission calculated for the product or producer for a commissionable event. Constrains the output from the commission schedule.
MinCommissionAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description The minimum commission calculated for the product or producer for a commissionable event. Constrains the output from the commission schedule.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the producer commission.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the record owner. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Field	Details
ParentProducerCommissionId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The original commission record that was adjusted or modified. This is a relationship field. Relationship Name ParentProducerCommission Relationship Type Lookup Refers To ProducerCommission
PaymentDatetime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date on which the commission was paid.
ProcessingProducerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The producer who performed the commissionable event. This is a relationship field. Relationship Name ProcessingProducer Relationship Type Lookup Refers To Producer
ProducerId	Type reference Properties Create, Filter, Group, Sort, Update Description The producer, broker, brokerage, or other user who receives the commission.

Field	Details
	This is a polymorphic relationship field. Relationship Name Producer Relationship Type Lookup Refers To Account, Contact, Producer
ProducerProductionCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The production code for the producer who performs the commissionable event.
SourceSystem	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The system from which the producer commission record was sourced.
SourceSystemIdentifier	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The ID of the producer commission record in the source system. This field is unique within your organization.
Status	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Specifies the status of the commission payment. Possible values are: • Disputed • Paid • Pending • Reversed

Field	Details
Type	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Specifies the type of commission paid to a producer, account, or contact for a commissionable transaction. Possible values are: • Advance • Bonus • Chargeback • Commission • Contingent Commission

Product2

Represents a product that your company sells.

This object has several fields that are used only for quantity and revenue schedules (for example, annuities). Schedules are available only for orgs that have enabled the products and schedules features. If these features aren't enabled, the schedule fields don't appear, and you can't query, create, or update the fields.

 **Note:** As of API version 8.0, the Product object is no longer available. Requests that contain Product are refused, and responses don't contain the Product object. Use the Products2 object instead.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The `ConfigureDuringSale` and `IsSoldOnlyWithOtherProds` fields are available in version 58.0 and later when Industry Automotive or Subscription Management is enabled.

Fields

Field	Details
BillingPolicyId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the related billing policy. This field is available when Subscription Management is enabled. This field is available in API version 55.0 and later. This field is a relationship field. Relationship Name BillingPolicy Relationship Type Lookup Refers To BillingPolicy
CanUseQuantitySchedule	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the product can have a quantity schedule (<code>true</code>) or not (<code>false</code>). Label is Quantity Scheduling Enabled.
CanUseRevenueSchedule	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the product can have a revenue schedule (<code>true</code>) or not (<code>false</code>). Label is Revenue Scheduling Enabled.
ConnectionReceivedId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the PartnerNetworkConnection that shared this record with your org. This field is available when Salesforce to Salesforce is enabled.
ConnectionSentId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description ID of the PartnerNetworkConnection that this record is shared with. This field is available Salesforce to Salesforce is enabled. In API version 16.0 and later, this value is <code>null</code>. Use PartnerNetworkRecordConnection object to forward records to connections.
ConfigureDuringSale	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Determines whether a user can edit a configuration when creating a bundle order or quote. This field is available in API version 58.0 and later. This field is available when Industries Automotive or Subscription Management is enabled. Possible values are: - Allowed—Changes are allowed while adding line items to a bundle; for example, when adding products or editing quantity. - NotAllowed—Changes aren't allowed.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the org.
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description A text description of this record. Label is Product Description.
DisplayUrl	Type url Properties Create, Filter, Nillable, Sort, Update Description URL leading to a specific version of a record in the linked external data source.

Field	Details
ExternalDataSourceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the related external data source.
ExternalId	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The unique identifier of a record in the linked external data source. For example, <i>ID #123</i>.
Family	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Name of the product family associated with this record. Product families are configured as picklists in the user interface. To obtain a list of valid values, call <code>describeObjects()</code> and process the result for the values associated with the <code>Family</code> field. Label is Product Family.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this record is active (<code>true</code>) or not (<code>false</code>). Inactive Product2 records are hidden in many areas in the user interface. You can change the <code>IsActive</code> flag on a Product2 object as often as necessary. Label is Active.
IsArchived	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Describes whether the product is archived. The default value is <code>false</code>.
IsDeleted	Type boolean

Field	Details
	Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
IsSerialized	Type boolean Properties Create, Filter, Group, Sort, Update Description Indicates if a product is a serialized product (<code>true</code>) or not (<code>false</code>). Label is Serialized.
IsSoldOnlyWithOtherProds	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether the product can be sold independently or only as part of a bundle. This field is available in API version 58.0 and later. This field is available when Industries Automotive or Subscription Management is enabled. The default value is <code>false</code>, which means that the product can be sold independently.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last interacted with this record, directly or indirectly.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (<code>LastReferencedDate</code>), but not viewed it.
Name	Type string

Field	Details
	Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Default name of this record. Label is Product Name.
NumberOfQuantityInstallments	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description If the product has a quantity schedule, the number of installments.
NumberOfRevenueInstallments	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description If the product has a revenue schedule, the number of installments.
ProductClass	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description This field is read-only. Its value is determined by the value of the <code>Type</code> field and whether the product is associated with a ProductAttribute record. It describes whether a product is a bundle, set, or simple product, a variation parent, or a product variation. Possible values are: • Bundle—This product is a parent or component in a product bundle. • Set—This product is included in a product set. • Simple—This product has no variations • VariationParent—This product is a variation parent. It's the base product for one or more product variations and, though it has its own stock-keeping unit (SKU), isn't a sellable entity. Instead, it's the parent of sellable entities—its variations. • Variation—This product is a variation of a parent product. Each variation has its own SKU. When the value of <code>ProductClass = VariationParent</code>, it never changes. The value of <code>ProductClass</code> changes between <code>Simple</code> and <code>Variation</code> when you attach or detach a ProductAttribute record to the product. If you attach a ProductAttribute record to a product, then the product's <code>ProductClass</code> value changes to <code>Variation</code>. Conversely, when you detach all

Field	Details
	<code>ProductAttribute</code> records from a product, the <code>ProductClass</code> value changes to <code>Simple</code>. The default value is <code>Simple</code>. This field is available in API version 50.0 and later. It was introduced to support of B2B and B2C Commerce implementations.
<code>ProductCode</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Default product code for this record. Your org defines the product's code-naming pattern.
<code>QuantityInstallmentPeriod</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description If the product has a quantity schedule, the amount of time covered by the schedule.
<code>QuantityScheduleType</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of the quantity schedule, if the product has one.
<code>QuantityUnitOfMeasure</code>	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Unit of the product; for example, kilograms, liters, or cases. This field comes with only one value, <code>Each</code>, so consider creating your own. The <code>QuantityUnitOfMeasure</code> field on <code>ProductItem</code> inherits this field's values.
<code>RecalculateTotalPrice</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Changes behavior of OpportunityLineItem calculations when a line item has child schedule rows for the <code>Quantity</code> value. When enabled, if the rollup quantity changes, then the quantity rollup value is multiplied against the sales price to change the total price.
RevenueInstallmentPeriod	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description If the product has a revenue schedule, the time period covered by the schedule.
RevenueScheduleType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of the revenue schedule, if the product has one.
StockCheckMethod	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The method for how a product's inventory is checked. Stock checks on parent products are common when bundles are prepackaged and individual child components can't be sold separately. Stock checks on child products are common when bundles aren't prepackaged and must be put together during fulfillment. If bundles aren't prepackaged, child components can usually be sold separately. Possible values are: • <code>Null</code>—Check stock on the product SKU. • <code>DoNotCheck</code>—The stock shouldn't be check. • <code>ParentProduct</code>—If the product is a parent of a bundle, check stock on the parent product. • <code>ChildProducts</code>—If the product is a parent of a bundle, check stock on the child components.
StockKeepingUnit	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The SKU for the product. Use in tandem with or instead of the <code>ProductCode</code> field. For example, you can track the manufacturer's identifying code in the Product Code field and assign the product a SKU when you resell it.
<code>TaxPolicyId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the related tax policy. This field is available when Subscription Management is enabled. This field is available in API version 55.0 and later. This field is a relationship field. Relationship Name TaxPolicy Relationship Type Lookup Refers To TaxPolicy
<code>TransferRecordMode</code>	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description If serialized, indicates when the serial number is recorded. This field is visible based on field-level security. The value affects the read-only value of the <code>Product2TransferMode</code> field on the <code>ProductTransfer</code> object. Possible values are: • <code>SendAndReceive</code> —The serial number is recorded when sending or receiving. • <code>ReceiveOnly</code> —The serial number is recorded when receiving only.
<code>Type</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort

Field

Details

Description

The type of product. This field's value affects the read-only value of the `ProductClass` field on the `Product2` object. The following mappings define how the `Type` selection updates the `ProductClass`.

- `Base`—When `Type = Base`, then `ProductClass = VariationParent`.
- `Null`—When `Type = Null`, then `ProductClass = Simple` for standalone products.
- `Null`—When `Type = Null`, then `ProductClass = Variation` for variation products.
- `Bundle`—When `Type = Bundle`, then `ProductClass = Bundle`.
- `Set`—When `Type = Set`, then `ProductClass = Set`.

**Note:**

- Revenue Cloud doesn't support products with these specific combinations: `Type = Base` and `ProductClass = VariationParent` or `Type = Null` and `ProductClass = Variation`.
- Values `Null`, `Base`, `Bundle`, and `Set` are available in environments where both Commerce and Revenue Cloud co-exist.
- The `Type` field can only be updated from `Null` to `Bundle` for products with a `Simple ProductClass`.

This field is available when Revenue Cloud, B2B Commerce, B2C Commerce, or other clouds with PCM add-on is enabled.

This field is available in API version 50.0 and later.

UnitOfMeasureId

Type

reference

Properties

Create, Filter, Group, Nillable, Sort, Update

Description

The ID of the unit of measure associated with the product.

This field is a relationship field.

This field is available when Revenue Cloud is enabled.

This field is available in API version 63.0 and later.

Relationship Name

UnitOfMeasure

Refers To

UnitOfMeasure

Schedule Enabled Flags

When enabling the schedules feature, you can decide whether to enable quantity schedules, revenue schedules, or both. In addition, you can use the API to control quantity and revenue scheduling at the product level via the `CanUseQuantitySchedule` and `CanUseRevenueSchedule` flags. A value of `true` for either flag indicates that the product and any `OpportunityLineItems` can have a schedule of that type. These flags can be set when creating or updating `Product2` records.

Default Schedule Fields

The remaining schedule fields for this object define default schedules. Default schedule values are used to create an `OpportunityLineItemSchedule` when an `OpportunityLineItem` is created for the `Product`.

The default schedule fields support the following valid values (all fields are also nillable).

Field	Valid Values
<code>RevenueScheduleType</code>	Divide, Repeat
<code>RevenueInstallmentPeriod</code>	Daily, Weekly, Monthly, Quarterly, Yearly
<code>NumberOfRevenueInstallments</code>	Integer from 1 to 150, inclusive.
<code>QuantityScheduleType</code>	Divide, Repeat
<code>QuantityInstallmentPeriod</code>	Daily, Weekly, Monthly, Quarterly, Yearly
<code>NumberOfQuantityInstallments</code>	Integer from 1 to 150, inclusive

When you attempt to set the schedule fields when creating or updating, the API applies cross-field integrity checks. The integrity requirements are:

- If the schedule type is nil, the installment period and number of installments must be nil.
- If the schedule type is set to any value, then the installment period and number of installments must be non-nil.

Any create or update that fails these integrity checks is rejected with an error.

These default schedule fields, `CanUseQuantitySchedule`, and `CanUseRevenueSchedule`, are restricted picklist fields and are available only if the org has the schedules feature enabled.

Usage

Use this object to define the default product information for your org. This object is associated by reference with `Pricebook2` objects via `PricebookEntry` objects. The same product can be represented in different price books as price book entries. In fact, the same product can be represented multiple times (as separate `PricebookEntry` records) in the same price book with different prices or currencies. A product can only have one price for a given currency within the same price book. To be used in custom price books, all standard prices must be added as price book entries to the standard price book.

 **Note:** Note: You can't create lookup fields to `Product2` object, which have **Required** check box set to true or the **Don't Allow Deletion** radio button selected, as the platform would otherwise interpret this and throw an error that you cannot create a master-detail relationship to the object.

You can query the products that have been configured for your org. For example, you can allow your client application to obtain valid product IDs for use when configuring `PricebookEntry` records via the API. Your client application can perform the following tasks on `PricebookEntry` objects:

- Query
- Create for the standard price book or custom price books.
- Update
- Delete
- Change the `IsActive` field when creating or updating records

This object is defined only for those orgs that have products enabled as a feature. If the org doesn't have the products feature, this object doesn't appear in the `describeGlobal` call, and you can't describe or query this object.

If you try to delete a product via the API but there's an opportunity that uses that product, the delete fails. The workaround is to delete the product in the user interface, which gives you an option to archive the product.



Note: On opportunities and opportunity products, the workflow rules, validation rules, and Apex triggers fire when an update to a child opportunity product or schedule causes an update to the parent record. This means your custom application logic is enforced when there are updates to the parent record, ensuring higher data quality and compliance with your organization's business policies.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

Product2ChangeEvent (API version 44.0)

Change events are available for the object.

Product2Feed (API version 18.0)

Feed tracking is available for the object.

Product2History

History is available for tracked fields of the object.

Product2OwnerSharingRule (API version 50.0)

Sharing rules are available for the object.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

Product2DataTranslation

Represents the translated values of the data stored within a [Product2](#) record's fields. This object is available in API version 45.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- Your organization must be using Enterprise, Performance, Unlimited, or Developer edition.
- Translation Workbench and data translation must be enabled in your org.

- To view this object, you must have the “View Setup and Configuration” permission

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description The translated value for the Product2 description.
IsOutOfDate	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the translation is out-of-date (<code>true</code>) or current (<code>false</code>). A translation is out-of-date if the parent Product2 record is updated after the last translation was filed.
Language	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The language for these translated values.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The translated value for the Product2 record name. This field is required to translate the text in other fields.
ParentId	Type reference Properties Create, Filter, Group, Sort, Update Description The record ID of the Product2 associated with the data that is being translated.

Usage

Use this object to translate the data stored in a Product2 record into the different languages supported by Salesforce. If data translation is enabled for custom fields on the Product2 object, additional Product2DataTranslation fields exist for translating the data contained within those fields.

You can't use a custom external id field in an upsert call for a Product2DataTranslation object.

ProductAttribute

Represents the attributes that can be associated with a product. This object is available in API version 50.0 and later.

Supported Calls

create, delete, describeLayout(), describeSObjects(), getDeleted, getUpdated, query(), retrieve(), undelete, update, upsert

Special Access Rules

You must have the B2B Commerce license and a CMS workspace to access products.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The default value is USD. Possible values are: • USD—U.S. Dollar
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the product attribute set.
ProductId	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description The ID of the product that the attribute is associated with. This field is unique within your organization.
Sequence	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The order that product attributes appear in.
VariantParentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the variation parent record associated with the product attribute.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductAttributeEvent (API version 55.0)

Change events are available for the object.

ProductAttributeSet

Represents a group of attributes that can be associated with a product. This object is available in API version 50.0 and later.

Supported Calls

`create`, `delete`, `describeSObjects()`, `query()`, `retrieve()`, `update`, `upsert`

Special Access Rules

You must have the B2B Commerce license and a CMS workspace to access products.

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Text description of the product attribute set.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Possible values are: • da—Danish • de—German • en_US—English • esSpanish • es_MX—Spanish (Mexico) • fi—Finnish • fr—French • it—Italian • ja—Japanese • ko—Korean • nl_NL—Dutch • no—Norwegian • pt_BR—Portuguese (Brazil) • ru—Russian • sv—Swedish

Field	Details
	• <code>th</code>—Thai • <code>zh_CN</code>—Chinese (Simplified) • <code>zh_TW</code>—Chinese (Traditional)
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Label of the product attribute set.

ProductAttributeSetItem

Represents a set of attributes that can be associated with a product. This object is available in API version 50.0 and later.

Supported Calls

`create`, `delete`, `describeSObjects()`, `query()`, `retrieve()`, `update`, `upsert`

Special Access Rules

You must have the B2B Commerce license and a CMS workspace to access products.

Fields

Field	Details
Field	Type reference Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The field's API name.
FieldApiName	Type string Properties Filter, Sort Description A derived field whose values comes from CustomFieldDefinition object.

Field	Details
IsGroupedBy	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if product variations are grouped by a specific attribute. This field is available in API version 64.0 and later.
ProductAttributeSetId	Type reference Properties Create, Filter, Group, Sort Description The ID of the product attribute set.
Sequence	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The order that product attributes appear in.

ProductAttributeSetProduct

Represents the product associated with a set of attributes. This object is available in API version 50.0 and later.

Supported Calls

`create`, `delete`, `describeLayout()`, `describeSObjects()`, `getDeleted`, `getUpdated`, `query()`, `retrieve()`, `undelete`, `update`, `upsert`

Special Access Rules

You must have the B2B Commerce license and a CMS workspace to access products.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The default value is <code>USD</code>. Possible values are: • <code>USD</code>—U.S. Dollar
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the product associated with the product attribute set.
ProductAttributeSetId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the product attribute set.
ProductId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the product associated with the product attribute set.

ProductCatalog

The container that holds a Product Category hierarchy. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You must have the Industries, Retail, or B2B Commerce license.

Fields

Field	Details
CatalogCode	Type text Properties Create, Filter, Nillable, Sort, Update Description A unique ID associated with the catalog. Maximum size is 80 alphanumeric characters.
CatalogType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The category of an entry in the catalog. Possible values are: • Sales • ServiceProcess—Service Process The default value is Sales.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Possible values are: • EUR—Euro • USD—U.S. Dollar The default value is USD.
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the category.

Field	Details
EffectiveEndDate	Type dateTime Properties Filter, Nillable, Sort Description The date after which the catalog is unavailable to end users.
EffectiveStartDate	Type dateTime Properties Filter, Nillable, Sort Description The date on which the catalog is available to end users.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the ProductCatalog record.
NumberOfCategories	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description Number of ProductCategory records assigned to this ProductCatalog record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner. Relationship Name Owner Relationship Type Lookup Refers To Group, User
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The lifecycle state of the catalog. Possible values include: Draft, Active, Inactive

ProductCategory

Represents the category that products are organized in. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You must have the B2B Commerce license and a CMS workspace to access product media.

Fields

Field	Details
CatalogId	Type reference Properties Create, Filter, Group, Sort Description The ID of the catalog.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The default value is <code>USD</code>.
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the category.
IsNavigational	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the category.
NumberOfProducts	Type int Properties Filter, Group, Nillable, Sort Description The number of products in a category.
ParentCategoryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the product's parent category. Relationship Name ParentCategory Relationship Type Lookup Refers To ProductCategory
SortOrder	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Order that the category is displayed in.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ProductCategoryChangeEvent](#) (API version 55.0)

Change events are available for the object.

ProductCategoryProduct

Holds the relation between product and product category to assign products to a category. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You must have the Industries, Retail, or B2B Commerce license.

Fields

Field	Details
Catalog	Type reference Properties Filter, Group, Sort Description The foreign key to the ProductCatalog ID of the Category.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Possible values are: • EUR—Euro • USD—U.S. Dollar The default value is USD.

Field	Details
EffectiveEndDate	Type dateTime Properties Filter, Nillable, Sort Description The date after which the catalog is unavailable to end users.
EffectiveStartDate	Type dateTime Properties Filter, Nillable, Sort Description The date on which the catalog is available to end users.
IsPrimaryCategory	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if the ProductCategory is the primaryProductCategory for a given product in a ProductCatalog. The default value is <code>false</code>.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the ProductCategoryProduct record.
ProductCategory	Type reference Properties Create, Filter, Group, Sort Description Foreign key to the ProductCategory ID.
Product	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description ID of the product.
ProductToCategory	Type string Properties Filter, Group, Sort Description Concatenated Product ID and Category ID.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The lifecycle state of the catalog. Possible values include: Draft, Active, Inactive

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductCategoryProductEvent (API version 55.0)

Change events are available for the object.

ProductCategoryDataTranslation

Represents the translated values for the data stored within a [ProductCategory](#) record's fields. This object is available in API version 46.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- Your organization must be using Enterprise, Performance, Unlimited, or Developer edition.
- Translation Workbench and data translation must be enabled in your org.
- To view this object, you must have the "View Setup and Configuration" permission

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The translated value for the Product Category description.
IsOutOfDate	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the translation is out-of-date (<code>true</code>) or current (<code>false</code>). A translation is out-of-date if the parent ProductCategory record is updated after the last translation was filed.
Language	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The language for these translated values.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The translated value for the Product Category name.
ParentId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the category being translated.

Usage

Use this object to translate the data stored in a Product Category record into the different languages supported by Salesforce. If data translation is enabled for custom fields on the ProductCategory object, additional ProductCategoryDataTranslation fields exist for translating the data contained within those fields.

ProductComponentGroup

Represents the logical grouping of associated products in a bundle and the products’ arrangement policy (group cardinality). This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available when Industries EPC or Subscription Management is enabled.

Fields

Field	Details
Description	Type textarea Properties Create, Nillable, Update Description Describes the group items of a product bundle feature. For example, a group’s contents can be the associated products that accompany a main product in a bundle.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a related record or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user indirectly accessed this record (<code>LastReferencedDate</code>), but not viewed it.
<code>MaxBundleComponents</code>	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The maximum number of associated products allowed in a group.
<code>MinBundleComponents</code>	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The minimum number of associated products allowed in a group.
<code>Name</code>	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the product component group. Maximum length is 255 characters (of any type).
<code>OwnerId</code>	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The unique identifier of the owner of this object. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Field	Details
ParentProductId	Type reference Properties Create, Filter, Group, Sort Description The unique identifier associated with the main product record. This field is a relationship field. Relationship Name ParentProduct Relationship Type Lookup Refers To Product2
Sequence	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Determines the arrangement of the order products when configuring a bundle or set.

ProductConsumed

Represents an item from your inventory that was used to complete a work order or work order line item in field service.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.



Note: To create products consumed, you need Read permission on product items.



Note: To delete or undelete product consumed for non-serialized products, you need Edit, Create, and Read permission on product consumed. For product consumed records that lookup to serialized products, you need Modify All Data or Modify All Records permission on product consumed.

Fields

Field Name	Details
Description	Type textarea Properties Create, Nillable, Update Description Notes and context about the product consumed.
IsConsumed	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates that a product consumed has been processed if the Product2 it refers to has IsSerialized=true selected. The default is false.
IsLocked	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the product consumed record is locked or not. The default value is <code>false</code>.
IsProduct2Serialized	Type boolean Properties Create, Filter, Nillable, Sort, Update Description Indicates if a product is a serialized product. The default is false.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the product consumed was last modified. Its label in the user interface is Last Modified Date.
LastViewedDate	Type dateTime

Field Name	Details
	Properties Filter, Nillable, Sort Description The date when the product consumed was last viewed.
MayEdit	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the product consumed record can be edited or not. The default value is <code>false</code>.
PricebookEntryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Price book associated with the product consumed. If the work order and the product item's associated product are related to the same price book, the Price Book Entry auto-populates based on the product item.
Product2Id	Type reference Properties Filter, Group, Nillable, Sort Description Product associated with the product consumed.
ProductConsumedNumber	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description (Read Only) Auto-generated number identifying the product consumed.
ProductId	Type reference Properties Create, Filter, Group, Nillable, Sort

Field Name	Details
	Description Product item associated with the product consumed. Creating a product consumed record subtracts the quantity consumed from the linked product item's quantity.
ProductName	Type string Properties Filter, Group, Nillable, Sort Description Name for the product consumed.
QuantityConsumed	Type double Properties Create, Filter, Sort, Update Description The quantity of products consumed.
QuantityUnitOfMeasure	Type picklist Properties Filter, Group, Nillable, Sort Description Units of the consumed item; for example, kilograms or liters. Quantity Unit of Measure picklist values are inherited from the Quantity Unit of Measure field on products.
TotalPrice	Type currency Properties Filter, Nillable, Sort Description The total price paid for the product items.
UnitPrice	Type currency Properties Create, Filter, Nillable, Sort, Update Description The price per unit of the product consumed.

Field Name	Details
WorkOrderId	Type reference Properties Create, Filter, Group, Sort Description Work order that the product was consumed for.
WorkOrderLineItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Work order line item that the product was consumed for.

Usage

When a product is consumed during the completion of a work order, create a product consumed record to track its consumption. You can add products consumed to work orders or work order line items. Track product consumption at the line item level if you want to know which products were used for each line item's tasks.

The way you use products consumed depends on how closely you want to track the state of your inventory in Salesforce. If you want to track the entire lifecycle of items in your inventory, including their storage, transfer, and consumption, link your products consumed records to product items. This approach ensures that your inventory numbers auto-update to reflect the consumption of products from your inventory. If you want to track product consumption only, however, specify a Price Book Entry on each product consumed record and leave the Product Item field blank.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductConsumedChangeEvent (API version 48.0)

Change events are available for the object.

ProductConsumedFeed

Feed tracking is available for the object.

ProductConsumedHistory

History is available for tracked fields of the object.

ProductDetectedPriceChange

Represents a detected change in price for a product associated with a partner account. This object is available in API version 63.0 and later.

A ProductDetectedPriceChange record is automatically created when the system identifies a change in product pricing that can require price protection evaluation or further processing.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description References the partner account for which the price change was detected. This field is a relationship field. Relationship Name Account Refers To Account
EffectiveDate	Type date Properties Create, Filter, Group, Sort, Update Description Date when the new price becomes effective for the product.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the record was last referenced by the current user. Useful for activity tracking.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description Date and the timestamp the record was last referenced by a user or system process.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Unique name or identifier for the price change record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description User or group that owns this record. This is a polymorphic relationship field. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
ProcessingStatus	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates the current processing stage of the price change. Possible values are: - Completed - Inactive - New - Processing—In Progress
ProductId	Type reference Properties Create, Filter, Group, Sort, Update Description References the product for which the price change was detected.

Field	Details
	This field is a relationship field.
	Relationship Name Product
	Refers To Product2

ProductEntitlementTemplate

Represents predefined terms of customer support (Entitlement) that users can add to products (Product2).

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`

Special Access Rules

As of Summer '20 and later, only Salesforce admins, users with access to the Case, Entitlement, or Work Order objects, and users with the View Setup and Configuration permission can access this object.

Fields

Field	Details
EntitlementTemplateId	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the entitlement template. Must be a valid ID.
Product2Id	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the Product2 associated with the entitlement template. Must be a valid ID.

Usage

Use to query and manage entitlement templates.

SEE ALSO:
[Entitlement](#)

ProductFeaturedProduct

Represents the user-defined collection of featured products that are meant to cross-sell or upsell with your product. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Fields

Field	Details
FeatrProdtRelaType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Defines how the featured product is related to the product. Possible values are: - Complete the Look - Featured Products - New Arrivals - Top Seller
FeaturedProductId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the featured product that is linked to the product. This field is a relationship field.

Field	Details
	Relationship Name FeaturedProduct Refers To Product2
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the user-defined collection of featured products.
ProductId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the product that your company sells. This field is a relationship field. Relationship Name Product Refers To Product2
Sequence	Type int

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Defines the order in which featured products are displayed.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ProductFeaturedProductChangeEvent](#)

Change events are available for the object.

ProductItem

Represents the stock of a particular product at a particular location in field service, such as all bolts stored in your main warehouse.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
<code>LastReferencedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The date when the product item was last modified. Its label in the user interface is Last Modified Date.
<code>LastViewedDate</code>	Type dateTime Properties Filter, Nillable, Sort

Field Name	Details
	Description The date when the product item was last viewed.
LocationId	Type reference Properties Create, Filter, Group, Sort Description Location associated with the product item. This usually indicates where the product item is stored. This is a relationship field. Relationship Name Location Relationship Type Lookup Refers To Location
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The product item's owner. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
Product2Id	Type reference Properties Create, Filter, Group, Sort Description Product associated with the product item, which represents the type of product in your inventory. This is a relationship field.

Field Name	Details
	Relationship Name Product2
	Relationship Type Lookup
	Refers To Product2
ProductItemNumber	Type string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description (Read Only) Auto-generated number identifying the product item.
ProductName	Type string
	Properties Filter, Group, Nillable, Sort
	Description A name for the product item. Try to select a name that indicates what is being stored where; for example, Batteries in Warehouse A.
QuantityOnHand	Type double
	Properties Create, Filter, Sort, Update
	Description The quantity at the location. If you want to add a serial number, this value must be 1.
QuantityUnitOfMeasure	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Units of the product item; for example, kilograms or liters. Quantity Unit of Measure picklist values are inherited from the Quantity Unit of Measure field on products.
SerialNumber	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description A unique number for identification purposes. If you want to enter a serial number, the Quantity on Hand must be 1.

Usage

Each product item is associated with a product and a location in Salesforce. If a product is stored at multiple locations, the product will be tracked in a different product item for each location.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductItemChangeEvent (API version 48.0)

Change events are available for the object.

ProductItemFeed

Feed tracking is available for the object.

ProductItemHistory

History is available for tracked fields of the object.

ProductItemOwnerSharingRule

Sharing rules are available for the object.

ProductItemShare

Sharing is available for the object.

ProductItemTransaction

Represents an action taken on a product item in field service. Product item transactions are auto-generated records that help you track when a product item is replenished, consumed, or adjusted.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `undelete()`, `upsert()`

Special Access Rules

- Field Service must be enabled.
- Only users with Modify All Data or Modify All Records permissions can delete this object.

Fields

Field Name	Details
Description	Type textarea Properties Create, Nillable, Update Description A description of the transaction. The description is blank when the transaction record is created, but can be updated.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last interacted with this record, directly or indirectly.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (LastReferencedDate), but not viewed it.
ProductItemId	Type reference Properties Create, Filter, Group, Sort Description The associated product item. This is a relationship field. Relationship Name ProductItem Relationship Type Lookup Refers To ProductItem

Field Name	Details
ProductItemTransactionNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description (Read Only) Auto-generated number identifying the product item transaction.
Quantity	Type double Properties Create, Filter, Sort Description The quantity of the product item involved in the transaction. If inventory was consumed, the quantity is negative.
RelatedRecordId	Type reference Properties Filter, Group, Nillable, Sort Description (Read Only) The product consumed or product transfer related to the action. If the action wasn't related to consumption or transfer, the related record is blank. This is a polymorphic relationship field. Relationship Name RelatedRecord Relationship Type Lookup Refers To ProductTransfer, Visit
TransactionType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The action that the transaction tracks. - Replenished: When a part is stocked at a location. A Replenished transaction is created when a product item is created. - Consumed: When parts are consumed to complete a work order. A Consumed transaction is created when a record is added to the Products Consumed related list on a work order or work order line item.

Field Name	Details
	- Adjusted: When there's a discrepancy or a change in consumption. An Adjusted transaction is created when a product item's Quantity on Hand is edited, a product consumed is updated or delete, or a product transfer is deleted. - Transferred: When parts are transferred between locations.

Associated Objects

This object has these associated objects. Unless noted, they're available in the same API version as this object.

[ProductItemTransactionChangeEvent](#)

Change events are available for the object.

[ProductItemTransactionFeed](#)

Feed tracking is available for the object.

[ProductItemTransactionHistory](#)

History is available for tracked fields of the object.

ProductMedia

Represents the rich media, including images and attachments, that can be added to products. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You must have the B2B Commerce license and a CMS workspace to access product media.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The default value is <code>USD</code>. Possible values are: <code>USD</code>—U.S. Dollar

Field	Details
ElectronicMediaGroupId	Type reference Properties Create, Filter, Group, Sort, Update Description Unique ID of the media group. This field is a relationship field. Relationship Name ElectronicMediaGroup Relationship Type Lookup Refers To ElectronicMediaGroup
ElectronicMediaId	Type reference Properties Create, Filter, Group, Sort, Update Description Unique ID of the media record. This field is a polymorphic relationship field. Relationship Name ElectronicMedia Relationship Type Lookup Refers To ManagedContent, ManagedContentInfo
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the media.
ProductId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the product that the media is associated with. This field is a relationship field. Relationship Name Product Relationship Type Lookup Refers To Product2
SortOrder	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The order that product media is displayed in.

Associated Objects

[ProductMediaChangeEvent](#) (API version 57.0)

Change events are available for the object.

[ProductMediaHistory](#) on page 63

History is available for tracked fields of the object.

[ProductMediaOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[ProductMediaShare](#) on page 67
Sharing is available for the object.

ProgramProduct

Represents a junction between Program and Product2. This will hold Product2 values related to a Program. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available only with the EAndU Cloud Program Access permission set.

Fields

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the ProgramProduct object.
ProductId	Type reference Properties Create, Filter, Group, Sort, Update Description The Product2 object associated with the Program. This field is a relationship field. Relationship Name Product Relationship Type Lookup Refers To Product2

Field	Details
ProgramId	Type reference Properties Create, Filter, Group, Sort, Update Description The Program parent object associated with the record. This field is a relationship field. Relationship Name Program Relationship Type Lookup Refers To Program
Status	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Specifies the status of the ProgramProduct object. Possible values are: • Active • Inactive • Pending For Approval

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProgramProductChangeEvent

Change events are available for the object.

ProgramProductFeed

Feed tracking is available for the object.

ProgramProductHistory

History is available for tracked fields of the object.

ProgramProductOwnerSharingRule

Sharing rules are available for the object.

ProgramProductShare

Sharing is available for the object.

ProductQuantityRule

Represents the relationship between a quantity rule and a product. This object assigns quantity rules to a product. This object is available in API version 51.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The ProductQuantityRule object is available only if the B2B Commerce license or Automotive Cloud license is enabled.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The ISO code for the currency that's specified on the buyer's account. This field is exposed in orgs that have multicurrency enabled. Default value is USD. Possible values are: • EUR—Euro • USD—U.S. Dollar
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the product quantity rule.
ProductId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the product. This field is a relationship field.

Field	Details
	Relationship Name Product
	Relationship Type Lookup
	Refers To Product2
PurchaseQuantityRuleId	Type reference
	Properties Create, Filter, Group, Sort
	Description ID of the related purchase quantity rule. This field is a relationship field.
	Relationship Name PurchaseQuantityRule
	Relationship Type Lookup
	Refers To PurchaseQuantityRule

ProductRelatedComponent

Represents a product that is included in a product bundle, a set, or a product and an add-on. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

In version 58.0 and later, this object is available when B2B Commerce, B2C Commerce, Industries Automotive, Industries EPC, or Subscription Management is enabled.

In version 57.0, this object is available when B2B Commerce, B2C Commerce, or Industries Automotive is enabled.

Fields

Details	
ChildProductId	Type reference Properties Create, Filter, Group, Sort Description The unique identifier of the associated product. This field is a relationship field. In a bundle relationship, this item is the child product. Relationship Name ChildProduct Relationship Type Lookup Refers To Product2
ChildProductRole	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The position of the associated product in the relationship. Possible values are: • AddOnComponent—The child product is an add-on to another product. Available in API version 58.0 and later. • BundleComponent—The child product is a component in a bundle. • SetComponent—The child product is a component in a set.
ChildSellingModelId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The unique identifier of the associated product's sales model. This field is a relationship field. Relationship Name ChildSellingModel Relationship Type Lookup

Details	
Refers To ProductSellingModel	
DoesBundlePriceIncludeChild	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the bundle price includes the associated product's price.
IsComponentRequired	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the associated product is required for configuring a bundle or set. The default value is <code>false</code> .
IsDefaultComponent	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the associated product is part of the product bundle or set automatically, or can be added after the bundle's or set's creation. The default value is <code>false</code> .
IsQuantityEditable	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether you can edit the component's quantity in the bundle or set after the bundle's or set's creation. The default value is <code>false</code> .
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Details

Description

The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.

LastViewedDate

Type

dateTime

Properties

Filter, Nillable, Sort

Description

The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user accessed this record or list view (`LastReferencedDate`) without viewing it.

MaxQuantity

Type

double

Properties

Create, Filter, Nillable, Sort, Update

Description

The associated product's allowed maximum quantity.

MinQuantity

Type

double

Properties

Create, Filter, Nillable, Sort, Update

Description

The associated product's allowed minimum quantity.

Name

Type

string

Properties

Autonumber, Defaulted on create, Filter, idLookup, Sort

Description

The name of the associated product.

ParentProductId

Type

reference

Properties

Create, Filter, Group, Sort

Description

The unique identifier of the main product around which the bundle or set is built.
This field is a relationship field.

Details	
	Relationship Name ParentProduct
	Relationship Type Lookup
	Refers To Product2
ParentProductRole	Type picklist
	Properties Filter, Group, Restricted picklist, Sort
	Description Indicates the position of the main product in the relationship. Possible values are: • AddOn—The main product is the add-on parent. Available in API version 58.0 and later. • Bundle—The main product is the bundle parent. • Set— The main product is the set parent.
ParentSellingModelId	Type reference
	Properties Create, Filter, Group, Nillable, Sort
	Description The unique identifier of the main product's sales model. This field is a relationship field.
	Relationship Name ParentSellingModel
	Relationship Type Lookup
	Refers To ProductSellingModel
ProductComponentGroupId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The unique identifier of the group of a product bundle or set. This group contains the associated products that can be included in the main product's bundle or set. This field is a relationship field.

Details**Relationship Name**

ProductComponentGroup

Relationship Type

Lookup

Refers ToProductComponentGroup

ProductRelationshipTypeId

Type

reference

Properties

Create, Filter, Group, Sort, Update

Description

The unique identifier of the record that describes the relationship between the main and associated products.

This field is a relationship field.

Relationship Name

ProductRelationshipType

Relationship Type

Lookup

Refers ToProductRelationshipType

Quantity

Type

double

Properties

Create, Defaulted on create, Filter, Nillable, Sort, Update

Description

The unit count of the associated product.

QuantityScaleMethod

Type

picklist

Properties

Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description

The scaling method is used to calculate the associated product's quantity based on changes made to the main product's quantity in a transaction.

Possible values are:

- **Constant** — The associated product's quantity remains the same in relation to the main product's quantity. For example, the main product has a quantity of one and the associated component has a quantity of one. If you increase the quantity of the main product to two, the associated component's quantity remains at one.
-

	Details
	<code>Proportional</code> — The associated product’s quantity increases or decreases based on the main product’s quantity. For example, the main component has a quantity of one and the associated product has a quantity of two. If you increase the quantity of the main product to two, the associated product’s quantity increases to four. The default value is <code>Proportional</code>.
Sequence	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Determines the arrangement of the order products when configuring a bundle or set.

ProductRelationshipType

Defines the relationship between two sales transaction items. For example, defines a relationship between a bundle and a bundle component. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

In version 58.0 and later, this object is available when B2B Commerce, B2C Commerce, or Subscription Management is enabled.

In version 57.0, this object is available when B2B Commerce or B2C Commerce is enabled.

Fields

Field	Details
AssociatedProductRoleCat	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The position category that the associated product plays in the relationship. Possible values are: <code>AddOnComponent</code> —The associated product is an add-on.

Field	Details
	• <code>BundleComponent</code> — The associated product is part of a bundle. • <code>SetComponent</code> — The associated product is part of a set.
<code>LastReferencedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
<code>LastViewedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>), but not viewed it.
<code>MainProductRoleCat</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The position category that the main product plays in the relationship. Possible values are: • <code>AddOn</code>—The parent of the add-on. • <code>Bundle</code>—The bundle parent. • <code>Set</code>—The set parent.
<code>Name</code>	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the relationship between two product items.

ProductRequest

Represents an order for a part or parts in field service.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Authenticated external users can create and update ProductRequest objects.

Fields

Field Name	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The account associated with the product request. This is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
CaseId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The case associated with the product request. This is a relationship field. Relationship Name Case

Field Name	Details
	Relationship Type Lookup Refers To Case
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only if the multicurrency feature is enabled. Contains the ISO code for any currency allowed by the organization. The label in the user interface is Currency ISO Code.
Description	Type textarea Properties Create, Nillable, Update Description A text field for details not recorded in the provided fields.
DestinationLocationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Where the product is delivered. This is a relationship field. Relationship Name DestinationLocation Relationship Type Lookup Refers To Location
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field Name	Details
	Description The date when the product request was last modified. Its label in the user interface is Last Modified Date.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the product request was last viewed.
NeedByDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date the product must be delivered by.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the shipment. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ProductRequestNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-assigned number that identifies the shipment.
ShipToAddress	Type address

Field Name	Details
	Properties Filter, Nillable Description The address that the product is to be delivered to.
ShipToCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The city that the product is to be delivered to.
ShipToCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The country that the product is to be delivered to.
ShipToCountryCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description A two letter uppercase country code conforming to the ISO 3166-1 alpha-2 standard.
ShipToGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The accuracy of the geocode for the shipping address.
ShipToLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description The latitude of the location where the product is to be delivered to.

Field Name	Details
ShipToLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description The longitude of the location where the product is to be delivered to.
ShipToPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The postal code of the address where the product is to be delivered to.
ShipToState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the state where the product is to be delivered to.
ShipToStateCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description A two letter uppercase state code conforming to the ISO 3166-1 alpha-2 standard.
ShipToStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The street address where the product is to be delivered to.
ShipmentType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The type of shipment. The picklist includes the following values by default:

Field Name	Details
	• None • Rush • Overnight • Next Business Day • Pick Up
SourceLocationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The location the product is shipped from. This is a relationship field. Relationship Name SourceLocation Relationship Type Lookup Refers To Location
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Status of the product transfer.
WorkOrderId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The work order that the product request is related to. This is a relationship field. Relationship Name WorkOrder Relationship Type Lookup Refers To WorkOrder

Field Name	Details
WorkOrderLineItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The work order line item that the product request is related to. This is a relationship field. Relationship Name WorkOrderLineItem Relationship Type Lookup Refers To WorkOrderLineItem

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductRequestChangeEvent (API version 48.0)

Change events are available for the object.

ProductRequestFeed

Feed tracking is available for the object.

ProductRequestHistory

History is available for tracked fields of the object.

ProductRequestOwnerSharingRule

Sharing rules are available for the object.

ProductRequestShare

Sharing is available for the object.

ProductRequestLineItem

Represents a request for a part in field service. Product request line items are components of product requests.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled. You can't use product request line item as a master in an master detail relationship (through a custom field) with a custom object with data.

Fields

Field Name	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The account associated with the product request line item. This is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
CareProgramEnrolleeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the care program enrollee associated with the product request line item. This field is available from API version 49.0 and later. This is a relationship field. Relationship Name CareProgramEnrollee Relationship Type Lookup Refers To CareProgramEnrollee
CaseId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The case associated with the product request line item. This is a relationship field. Relationship Name Case Relationship Type Lookup Refers To Case
Description	Type textarea Properties Create, Nillable, Update Description Details not recorded in the provided fields.
DestinationLocationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Where the product is delivered. This is a relationship field. Relationship Name DestinationLocation Relationship Type Lookup Refers To Location
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last interacted with this record, directly or indirectly.
LastViewedDate	Type dateTime

Field Name	Details
	Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (<code>LastReferencedDate</code>), but not viewed it.
NeedByDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date the product must be delivered by.
ParentId	Type reference Properties Create, Filter, Group, Sort Description The product request that the line item belongs to. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To ProductRequest
Product2Id	Type reference Properties Create, Filter, Group, Sort, Update Description The product associated with the product request line item. This is a relationship field. Relationship Name Product2 Relationship Type Lookup Refers To Product2

Field Name	Details
ProductRequestLineItemNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description (Read Only) An auto-assigned number that identifies the product request line item.
QuantityRequested	Type double Properties Create, Filter, Sort, Update Description The amount requested.
QuantityUnitOfMeasure	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Units of the requested product; for example, grams, liters, or units. The picklist values can be customized.
ShipToAddress	Type address Properties Filter, Nillable Description The physical address where the product is needed.
ShipToCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The city of the address where the product is needed.
ShipToCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The country of the address where the product is needed.
ShipToGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Accuracy level of the geocode for the address where the product is needed. See Compound Field Considerations and Limitations for details on geolocation compound fields. This field is available in the API only.
ShipToLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with Longitude to specify the precise geolocation of the address where the product is needed. Acceptable values are numbers between –90 and 90 with up to 15 decimal places. See Compound Field Considerations and Limitations for details on geolocation compound fields. This field is available in the API only.
ShipToLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with Latitude to specify the precise geolocation of the address where the product is needed. Acceptable values are numbers between –180 and 180 with up to 15 decimal places. See Compound Field Considerations and Limitations for details on geolocation compound fields. This field is available in the API only.
ShipToPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The postal code of the address where the product is needed.
ShipToState	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The state of the address where the product is needed.
ShipToStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The street of the address where the product is needed.
ShipmentType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The type of shipment. The picklist includes the following values, which can be customized: • Rush • Overnight • Next Business Day • Pick Up
SourceLocationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Where the product is at the time of the request. This is a relationship field. Relationship Name SourceLocation Relationship Type Lookup Refers To Location
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The status of the shipment. The picklist includes the following values, which can be customized: • Draft • Submitted • Received
WorkOrderId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The work order for which the product is needed. This is a relationship field. Relationship Name WorkOrder Relationship Type Lookup Refers To WorkOrder
WorkOrderLineItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The work order line item for which the product is needed. This is a relationship field. Relationship Name WorkOrderLineItem Relationship Type Lookup Refers To WorkOrderLineItem

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductRequestLineItemChangeEvent (API version 48.0)

Change events are available for the object.

ProductRequestLineItemFeed

Feed tracking is available for the object.

ProductRequestLineItemHistory

History is available for tracked fields of the object.

ProductRequired

Represents a product that is needed to complete a work order or work order line item in field service.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the product required was last modified. Its label in the user interface is Last Modified Date.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the product required was last viewed.
ParentRecordId	Type reference Properties Create, Filter, Group, Sort

Field Name	Details
	Description The work order or work order line item that the product is required for. This is a polymorphic relationship field. Relationship Name ParentRecord Relationship Type Lookup Refers To Visit, WorkOrder, WorkOrderLineItem, WorkType
ParentRecordType	Type string Properties Filter, Group, Nillable, Sort Description Indicates whether the parent record is a work order or a work order line item.
Product2Id	Type reference Properties Create, Filter, Group, Sort, Update Description The required product. This is a relationship field. Relationship Name Product2 Relationship Type Lookup Refers To Product2
ProductName	Type string Properties Filter, Group, Nillable, Sort Description The name of the product required.
ProductRequiredNumber	Type string

Field Name	Details
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description (Read only) Auto-generated number identifying the product required.
QuantityRequired	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description Quantity required of the product.
QuantityUnitOfMeasure	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Units of the required product; for example, kilograms or liters. Quantity Unit of Measure picklist values are inherited from the Quantity Unit of Measure field on products.

Usage

Required products can be added to work types, work orders, and work order line items to ensure that the assigned service resource arrives with the right equipment.

Adding required products to work types saves you time and keeps your business processes consistent. Work orders and work order line items inherit their work type's required products. For example, if all light bulb replacement jobs require a ladder and a light bulb, add the ladder and light bulb as required products to your Light Bulb Replacement work type. When it's time to create a work order for a customer's light bulb replacement, applying that work type to the work order adds the required products.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

ProductRequiredChangeEvent

Change events are available for the object.

ProductRequiredFeed

Feed tracking is available for the object.

ProductRequiredHistory

History is available for tracked fields of the object.

ProductSellingModel

Defines one method by which a product can be sold; for example, as a one-time sale, an evergreen subscription, or a term-defined subscription. If the product is sold on subscription, this object defines the subscription's term. A product can have multiple product selling models. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available with Revenue Cloud and Subscription Management. This object is available for Commerce when the Subscriptions (Beta) permission is enabled.

Fields

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name given to the product selling model.
PricingTerm	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the duration of the pricing term for a given selling model. Used with <code>PricingTermUnit</code>. For example, if this field's value is 1 and the <code>PricingTermUnit</code> is <code>Months</code>, the subscription is priced monthly. If the selling model is one-time, this field must be null. Possible value is: 1
PricingTermUnit	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description The unit of time used to define the pricing term. Used with <code>PricingTerm</code> to define the length of the pricing term. For example, if this field is <code>Months</code> and <code>PricingTerm</code> is 1, the subscription is priced monthly. If the selling model is one-time, this field must be null. Possible values are: • <code>Annual</code>—UI label is <code>Years</code> • <code>Months</code>
<code>SellingModelType</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Indicates whether the product is sold as a one-time sale, an evergreen subscription, or a subscription with a defined term. Possible values are: • <code>Evergreen</code>—A subscription without an end date. An evergreen subscription continues until the customer affirmatively cancels it. • <code>OneTime</code>—A product that isn't sold as a subscription. • <code>TermDefined</code>—A subscription with a defined end date. The subscription continues for a specified time period. When the term ends, the subscription ends. The default value is <code>OneTime</code>.
<code>Status</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The status of the product selling model. Possible values are: • <code>Active</code>—An active product selling model can't be deleted, and only the <code>Name</code> and <code>Status</code> fields can be modified. An active product selling model can't be changed back to draft. • <code>Draft</code>—A draft product selling model can be modified and deleted. • <code>Inactive</code>—An inactive product selling model can't be deleted, and only the <code>Name</code> and <code>Status</code> fields can be modified. An inactive product selling model can't be changed back to draft. The default value is <code>Draft</code>.

ProductSellingModelOption

A junction object between Product Selling Model and Product2. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available when Subscription Management or Commerce Subscriptions is enabled. Some fields require Industries EPC to be enabled.

Fields

Field	Details
Description	Type textarea Properties Create, Nillable, Update Description The description of the product selling model option.
DisplayName	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the product selling model option to display to customers.
Increment	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The number of pricing term units that can be used to increase a subscription term.
IsDefault	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Indicates the default product selling model for a product. Setting a default is optional. A product can only have one default product selling model. The default value is <code>false</code>. This field requires Industries EPC.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view but not viewed it.
Maximum	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The maximum number of pricing term units for a subscription term.
Minimum	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The minimum number of pricing term units for a subscription term.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the product selling model.

Field	Details
Product2Id	Type reference Properties Create, Filter, Group, Sort Description The ID of the Product2 record associated with this ProductSellingModelOption record. This is a relationship field. Relationship Name Product2 Relationship Type Lookup Refers To Product2
ProductSellingModelId	Type reference Properties Create, Filter, Group, Sort Description The ID of the ProductSellingModel record associated with this ProductSellingModelOption record. This is a relationship field. Relationship Name ProductSellingModel Relationship Type Lookup Refers To ProductSellingModel
ProrationPolicyId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the ProrationPolicy record associated with this ProductSellingModelOption record. This is a relationship field. Relationship Name ProrationPolicy Relationship Type Lookup

Field	Details
	Refers To ProrationPolicy

ProductServiceCampaign

Represents a set of activities to be performed on a product service campaign asset, such as a product recall for safety issues or product defects. This object is available in API version 51.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
Description	Type textarea Properties Create, Nillable, Update Description Description of the product service campaign.
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date on which the product service campaign ends.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the asset was last modified. The UI label is Last Modified Date.

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the asset was last viewed.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The product service campaign's owner. By default, the product service campaign owner is the user who created the product service campaign record. The UI label is Product Service Campaign Owner.
Priority	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The priority of the product service campaign. Possible values are: • Critical • High • Low • Medium
Product2Id	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the Product2 associated with this campaign. The UI label is Product.
ProductServiceCampaignName	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the product service campaign.

Field	Details
StartDate	Type date Properties Create, Filter, Group, Sort, Update Description The date on which the product service campaign starts.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The status of the product service campaign. The picklist includes the following values, which can be customized: • New—Product service campaign created, but there hasn't yet been any activity. • In Progress—Product service campaign has begun. • On Hold—Work is paused. • Completed—Work is complete. • Cannot Complete—Work couldn't be completed. • Closed—All work and associated activity is complete. • Canceled—Work is canceled, typically before any work began.
StatusCategory	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The category that each <code>Status</code> value falls into. The <code>StatusCategory</code> field has eight default values: seven values that are identical to the default <code>Status</code> values, and <code>None</code> for statuses without a status category. If you create custom <code>Status</code> values, you must indicate which category it belongs to. For example, if you create a <i>Waiting for Response</i> value, add it the <i>On Hold</i> category. To learn which processes reference <code>StatusCategory</code>, see How are Status Categories Used?
Type	Type picklist Properties Create, Filter, Group, Sort, Update

Field	Details
	Description The type of the product service campaign. The picklist includes the following values, which can be customized: • <code>Modification</code>—The asset requires an on-site alteration. • <code>Recall</code>—The asset must be returned to the manufacturer for modification or upgrade. • <code>Service</code>—The asset needs to be serviced. • <code>Upgrade</code>—The asset needs updating.
<code>WorkTypeId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The work type associated with the product service campaign. A customer uses this field as a guide when setting work type for work orders for the product service campaign. Duration, Duration Type, and required skills.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[ProductServiceCampaignFeed](#)

Feed tracking is available for the object.

[ProductServiceCampaignHistory](#)

History is available for tracked fields of the object.

[ProductServiceCampaignOwnerSharingRule](#)

Sharing rules are available for the object.

[ProductServiceCampaignShare](#)

Sharing is available for the object.

ProductServiceCampaignItem

Represents a product service campaign's asset. This object is available in API version 51.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
AssetId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The asset associated with the product service campaign. Must be present if <code>Product2Id</code> is not present.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the asset was last modified. Its UI label is Last Modified Date.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the asset was last viewed.
Product2Id	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the Product2 associated with this campaign. The UI label is Product. Must be present if <code>AssetID</code> is not present.
ProductServiceCampaignId	Type reference Properties Create, Filter, Group, Sort Description Required. The item's parent product service campaign record.
ProductServiceCampaignItemNumber	Type string

Field	Details
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The ID of the product service campaign item.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The status of the product service campaign item. The picklist includes the following values, which can be customized: • New—Product service campaign item created, but there hasn't yet been any activity. • In Progress—Product service campaign item has begun. • On Hold—Product service campaign item is paused. • Completed—Product service campaign item is complete. • Cannot Complete—Product service campaign item couldn't be completed. • Closed—All product service campaign item and associated activity is complete. • Canceled—Product service campaign item is canceled, typically before any work began.
StatusCategory	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The category that each <code>Status</code> value falls into. The <code>StatusCategory</code> field has eight default values: seven values that are identical to the default <code>Status</code> values, and <code>None</code> for statuses without a status category. If you create custom <code>Status</code> values, you must indicate which category it belongs to. For example, if you create a <i>Waiting for Response</i> value, add it to the <i>On Hold</i> category. To learn which processes reference <code>StatusCategory</code>, see How are Status Categories Used?

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

ProductServiceCampaignItemFeed

Feed tracking is available for the object.

ProductServiceCampaignItemHistory

History is available for tracked fields of the object.

ProductServiceCampaignItemOwnerSharingRule

Sharing rules are available for the object.

ProductServiceCampaignItemShare

Sharing is available for the object.

ProductServiceCampaignItemStatus

Represents a status for a product service campaign item in field service. This object is available in API version 51.0 and later.

Supported Calls

describeSObjects(), query(), retrieve()

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
ApiName	Type string Properties Filter, Group, idLookup, Sort Description The API name of the status value.
IsDefault	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates that the status value is the default status on product service campaign items when true. Only one status value can be the default.
MasterLabel	Type string Properties Filter, Group, Nillable, Sort Description The label for the picklist value in the UI.

Field	Details
SortOrder	Type int Properties Filter, Group, Nillable, Sort Description The value's position in the dropdown list in the UI.
StatusCode	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The status category that the value corresponds to. The Status Category field has seven values that are identical to the default Status values.

Usage

The Status field on product service campaign items comes with the following values:

- New—Product service campaign item created, but there hasn't been any activity.
- In Progress—Work has begun.
- On Hold—Work is paused.
- Completed—Work is complete.
- Cannot Complete—Work couldn't be completed.
- Closed—All work and associated activity is complete.
- Canceled—Work is canceled, typically before any work began.

The ProductServiceCampaignItemStatus object corresponds to the Status field. Adding a value to the Status field—for example, Canceled By Supplier—creates a product service campaign item status record, and vice versa.



Note: Product service campaign items also come with a Status Category field whose values are identical to the default status values. If you create custom status values, you must indicate which category it belongs to. For example, if you create a *Customer Absent* value, add it to the *Cannot Complete* category. To learn which processes reference StatusCategory, see [How are Status Categories Used?](#)

ProductServiceCampaignStatus

Represents a status for a product service campaign in field service. This object is available in API version 51.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
ApiName	Type string Properties Filter, Group, idLookup, Sort Description The API name of the status value.
IsDefault	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates that the status value is the default status on product service campaigns when <code>true</code>. Only one status value can be the default.
MasterLabel	Type string Properties Filter, Group, Nillable, Sort Description The label for the picklist value in the UI.
SortOrder	Type int Properties Filter, Group, Nillable, Sort Description The value's position in the dropdown list in the UI.
StatusCode	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The status category that the value corresponds to. The Status Category field has seven values that are identical to the default Status values.

Usage

The Status field on product service campaigns comes with the following values:

- New—Product service campaign created, but there hasn’t been any activity.
- In Progress—Work has begun.
- On Hold—Work is paused.
- Completed—Work is complete.
- Cannot Complete—Work couldn’t be completed.
- Closed—All work and associated activity is complete.
- Canceled—Work is canceled, typically before any work began.

The ProductServiceCampaignStatus object corresponds to the Status field. Adding a value to the Status field—for example, Canceled By Supplier—creates a product service campaign status record, and vice versa.

 **Note:** Product service campaigns also come with a Status Category field whose values are identical to the default status values. If you create custom status values, you must indicate which category it belongs to. For example, if you create a *Customer Absent* value, add it to the *Cannot Complete* category. To learn which processes reference StatusCategory, see [How are Status Categories Used?](#)

ProductTransfer

Represents the transfer of inventory between locations in field service.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
Description	Type textarea Properties Create, Nillable, Update Description Details not recorded in the provided fields.
DestinationLocationId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The place the product is to be delivered. This is a relationship field. Relationship Name DestinationLocation Relationship Type Lookup Refers To Location
ExpectedPickupDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date the product is expected to be picked up.
IsReceived	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Checkbox identifying that the product was received.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the product request was last modified. Its label in the user interface is Last Modified Date.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the product request was last viewed.

Field Name	Details
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Owner of the product transfer. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
Product2Id	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Lookup field for the product associated with the product transfer. This is a relationship field. Relationship Name Product2 Relationship Type Lookup Refers To Product2
Product2TransferRecordMode	Type reference Properties Filter, Group, Nillable, Sort Description If serialized, indicates when the serial number is recorded. It is visible on the product transfer as a read-only field depending on the field-level security. Possible values are: • <code>SendAndReceive</code> —The serial number is recorded when sending or receiving. • <code>ReceiveOnly</code> —The serial number is recorded when receiving only. Relationship Name Product2.TransferRecordMode

Field Name	Details
	Relationship Type Lookup Refers To Product2.TransferRecordMode
ProductRequestId	Type reference Properties Filter, Group, Nillable, Sort Description Lookup field for the product request associated with the product transfer. This is a relationship field. Relationship Name ProductRequest Relationship Type Lookup Refers To ProductRequest
ProductRequestLineItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Lookup field for the product request line item associated with the product transfer. This is a relationship field. Relationship Name ProductRequestLineItem Relationship Type Lookup Refers To ProductRequestLineItem
ProductTransferNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-assigned number that identifies the product transfer.

Field Name	Details
QuantityReceived	Type double Properties Create, Filter, Nillable, Sort, Update Description Amount of product received at the destination location.
QuantitySent	Type double Properties Create, Filter, Sort, Update Description Amount of product sent from the source location.
QuantityUnitOfMeasure	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The units of the product, for example grams, liters, or units.
ReceivedById	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Lookup field for the contact who received the product at the destination location. This is a polymorphic relationship field. Relationship Name ReceivedBy Relationship Type Lookup Refers To Group, User
ReturnOrderId	Type reference Properties Filter, Group, Nillable, Sort Description The return order associated with the product transfer.

Field Name	Details
	This is a relationship field. Relationship Name ReturnOrder Relationship Type Lookup Refers To ReturnOrder
ReturnOrderLineItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The return order line item associated with the product transfer. This is a relationship field. Relationship Name ReturnOrderLineItem Relationship Type Lookup Refers To ReturnOrderLineItem
ShipmentExpectedDeliveryDate	Type dateTime Properties Filter, Nillable, Sort Description Lookup field for the shipment related to the product transfer.
ShipmentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Lookup field for the shipment related to the product transfer. This is a relationship field. Relationship Name Shipment Relationship Type Lookup

Field Name	Details
	Refers To Shipment
ShipmentStatus	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Sort Description Lookup field for the shipment related to the product transfer.
ShipmentTrackingNumber	Type string Properties Filter, Group, Nillable, Sort Description Lookup field for the shipment related to the product transfer.
ShipmentTrackingUrl	Type url Properties Filter, Group, Nillable, Sort Description Lookup field for the shipment related to the product transfer.
SourceLocationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Lookup field for the source location related to the product transfer. This is a relationship field. Relationship Name SourceLocation Relationship Type Lookup Refers To Location
SourceProductItemId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Lookup field for the product item related to the product transfer.
	Relationship Name SourceProductItem
	Relationship Type Lookup
	Refers To ProductItem
Status	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update
	Description Status of the product transfer.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductTransferChangeEvent (API version 48.0)

Change events are available for the object.

ProductTransferFeed

Feed tracking is available for the object.

ProductTransferHistory

History is available for tracked fields of the object.

ProductTransferOwnerSharingRule

Sharing rules are available for the object.

ProductTransferShare

Sharing is available for the object.

ProductWarrantyTerm

Defines the relationship between a product or product family and warranty term. This object is available in API version 50.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
CoveredProductFamily	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The product family that the warranty term applies to.
CoveredProductId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the product that the warranty term applies to.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the product warranty term was last modified. Its label in the user interface is <code>Last Modified Date</code>.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the product warranty term was last viewed.
ProductWarrantyTermNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The identifier for this product warranty term.

Field	Details
WarrantyTermId	Type reference
	Properties Create, Filter, Group, Sort
	Description The ID of the warranty term.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductWarrantyTermChangeEvent (API version 62.0)

Change events are available for the object.

Profile

Represents a profile, which defines a set of permissions to perform different operations. Operations can include creating a custom profile or querying, adding, updating, or deleting information.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, Customer Portal and Partner Portal users *can't* access this object.

To view the following settings, assignments, and permissions for standard and custom objects in a specified profile, the View Setup and Configuration permission is required.

- Client settings
- Field permissions
- Layout assignments
- Object permissions
- Permission dependencies
- Permission set tab settings
- Permission set group components
- Record types

Starting in Winter '21, only users with correct permissions can view profile names other than their own if the Profile Filtering setting is enabled.

 **Important:** Profile names are also exposed when users with permissions to perform the following tasks take these actions:

- Create a tab or record type with a wizard step that includes the assignment of tabs and record types to profiles.
- Configure a login flow where viewing profile lists is required to make flow associations.
- Set up delegated admins where looking up profiles is needed to identify assignable profiles.
- Administer an org as a delegated customer admin.
- Administer an org as a delegated admin to view and assign profiles of the delegated group.

Fields

Field	Details
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the profile.
IsSsoEnabled	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description If <code>true</code>, users assigned to this profile can delegate username and password authentication to a corporate database instead of the user database.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this profile. Available in API version 29.0 and later.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this profile. Available in API version 29.0 and later.

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the profile.
Permissions <i>PermissionName</i>	Type boolean Properties Create, Filter, Update Description One field for each permission. If <code>true</code>, users assigned to this profile have the named permission. The number of fields varies depending on the permissions for the org and license type.  Tip: To get a list of available permissions in SOAP API, use <code>describeObjects()</code>.
UserLicenseId	Type reference Properties Create, Filter, Group, Sort Description ID of the UserLicense associated with this profile. This is a relationship field. Relationship Name UserLicense Relationship Type Lookup Refers To UserLicense
UserType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The category of user license. Each <code>UserType</code> is associated with one or more UserLicense records. Each UserLicense is associated with one or more profiles. In API version 10.0 and later, valid values include:

Field	Details
	- Standard: user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses. Label is Standard. - PowerPartner: User whose access is limited because they're a partner and typically access the application through a partner portal or Experience Cloud site. Label is Partner. - CspLitePortal: user whose access is limited because they're an org's customer and access the application through a Customer Portal or Experience Cloud site. Label is High Volume Portal. - CustomerSuccess: user whose access is limited because they're an org's customer and access the application through a Customer Portal. Label is Customer Portal User. - PowerCustomerSuccess: user whose access is limited because they're an org's customer and access the application through a Customer Portal. Label is Customer Portal Manager. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the Customer Portal role hierarchy. - CsnOnly: user whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users. Label is Chatter Free. - Guest: user whose access is limited because they're an unauthenticated user without login credentials. Label is Guest. <code>UserType</code> replaces <code>LicenseType</code>, which is unavailable as of API version 10.0. In API versions 8.0 and 9.0 <code>LicenseType</code> is still available with the following valid values: - AUL: Lightning Platform user license. Label is Apex Platform. - AUL1: Lightning Platform user license with only one user. Label is Apex Platform One. - Salesforce: Salesforce user license. Label is Salesforce. - PackageManager: user who can create and work with managed packages for AppExchange. Label is Package Manager. - PRM: user whose access is limited because they're a partner and typically accesses the application through a partner portal. Label is Partner. - CustomerUser: user whose access is limited because they're an org's customer and accesses the application through a Customer Portal. Label is Customer Portal User. - CustomerManager: user whose access is limited because they're an org's customer and accesses the application through a Customer Portal. Label is Customer Portal Manager. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the Customer Portal role hierarchy. In API version 53.0 and later, you can't set the value of <code>UserType</code> using Apex.

Usage

Use the Profile object to create custom profiles that start without any permissions enabled except for required permissions for the profile's user license. While you can use the Profile Metadata type to deploy profiles, we recommend that you use the Profile SOAP API object because it allows you to create empty profiles.

You can also query the set of currently configured user profiles in your org. Your client application can use Profile objects to obtain valid profile IDs for use when querying or modifying users through the API.

In the user interface, profiles can be used to assign user licenses from specific pools (Lightning Platform user license or Salesforce user license, for example). When users are reassigned to profiles with different license types, the number of available licenses in the old license type pool increases, one per user assignment updated. Also, the number of available licenses decreases by the same amount in the new license type pool.

SEE ALSO:

- [Overview of Salesforce Objects and Fields](#)
- [PermissionSet](#)

ProfileSkill

Represents a profile skill, which describes a user’s professional knowledge. This is a global record for the organization, and users are associated through the ProfileSkillUser object.

 **Note:** For information about Live Agent skills, see the [Skill](#) topic.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
Description	Type textarea Properties Create, Nillable, Update Description Description of the profile skill.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp indicating when the current user last viewed a record related to this profile skill. Available in API version 29.0 and later.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field Name	Details
	Description The timestamp indicating when the current user last viewed this profile skill. Available in API version 29.0 and later.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the profile skill.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the profile skill. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
UserCount	Type int Properties Filter, Group, Nillable, Sort Description The number of users with the profile skill.

Usage

Use the ProfileSkill object to look up the attributes of a skill that can be assigned to a user. This is a global object and is not owned by any specific user.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

ProfileSkillFeed (API version 34.0)

Feed tracking is available for the object.

ProfileSkillHistory

History is available for tracked fields of the object.

ProfileSkillOwnerSharingRule

Sharing rules are available for the object.

ProfileSkillShare

Sharing is available for the object.

ProfileSkillEndorsement

Represents a detail relationship of ProfileSkillUser. An endorsement of a profile skill shows approval and support of another user's publicly declared skill.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the profile skill being endorsed.
ProfileSkillUserId	Type reference Properties Create, Filter, Group, Sort Description The ID of the ProfileSkillUser record that is being endorsed. This is a relationship field. Relationship Name ProfileSkillUser Relationship Type Lookup Refers To ProfileSkillUser

Field Name	Details
UserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The user ID of the person giving the endorsement. This is a relationship field. Relationship Name User Relationship Type Lookup Refers To User

Usage

Use the ProfileSkillEndorsement object to query about a single endorsement given to a user about a specific skill. Users can't endorse themselves, they can only be endorsed by others unless they are administrators with the "Modify All Data" permission.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

ProfileSkillEndorsementChangeEvent (API version 62.0)

Change events are available for the object.

ProfileSkillEndorsementFeed (API version 34.0)

Feed tracking is available for the object.

ProfileSkillEndorsementHistory

History is available for tracked fields of the object.

ProfileSkillShare

Represents a sharing entry on a ProfileSkill.

You can only create, edit, and delete sharing entries for standard objects whose RowCause field is set to Manual. Sharing entries for standard objects with different RowCause values are created as a result of your Salesforce org's sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren't stored at all.



Note: While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it's possible that we'll stop storing certain share records to improve performance. As a best practice, don't create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

The properties available for some fields depend on the default organization-wide sharing settings. The properties listed are true for the default settings of such fields.

Field Name	Details
AccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Level of access that the User or Group has to the ProfileSkill. The possible values are: • Read • Edit • All (This value is not valid for <code>create()</code> or <code>update()</code> calls.) This value must be set to an access level that is higher than the organization's default access level for ProfileSkill objects.
ParentId	Type reference Properties Create, Filter, Group, Sort Description ID of the parent object, if any. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To ProfileSkill
RowCause	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort

Field Name	Details
	Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is <code>Manual</code>. If no value is specified, the field defaults to <code>Manual</code>. All other <code>RowCause</code> values are read-only. After the sharing entry is created, this field can't be edited. Values may include: <code>Manual</code>—The User or Group has access because a user with "All" access manually shared the ProfileSkill with them. <code>Owner</code>—The User is the owner of the ProfileSkill or is in a role above the ProfileSkill owner in the role hierarchy.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the User or Group that has been given access to the ProfileSkill. This is a polymorphic relationship field. Relationship Name UserOrGroup Relationship Type Lookup Refers To Group, User

Usage

This object is read only. It is visible because of constraints to the ProfileSkill object, but it is ignored and does not control which users and groups can view and edit ProfileSkill records owned by other users.

ProfileSkillUser

Represents a detail relationship of User. The object connects profile skills with users.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
EndorsementCount	Type int Properties Filter, Group, Nillable, Sort Description The number of endorsements.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the skill user.
ProfileSkillId	Type reference Properties Create, Filter, Group, Sort Description The ID of the ProfileSkill. This is a relationship field. Relationship Name ProfileSkill Relationship Type Lookup Refers To ProfileSkill
UserId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the user. This field can't be changed once it is created. This is a relationship field. Relationship Name User Relationship Type Lookup

Field Name	Details
	Refers To User

Usage

Use this object to assign specific skills to specific users. ProfileSkillUser appears on the Overview tab on the Chatter profile page. Users can only create a skill mapping for themselves, they can't create skill mappings for others unless they are administrators with the "Modify All Data" permission. Additionally, users can only edit this object if they are the context user and are not editing the `userId` field.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

ProfileSkillUserFeed (API version 34.0)

Feed tracking is available for the object.

ProfileSkillUserHistory

History is available for tracked fields of the object.

ProgramRebateType

Represents a rebate structure associated with a Rebate Program. This object is available in API version 63.0 and later.

A ProgramRebateType record is created to define how benefits are calculated—such as accruals, payouts, or both—based on specified measure fields and logic.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AccrualRate	Type double Properties Create, Filter, Nillable, Sort, Update Description The rate of accrual based on the value selected in the Measure Type field. For example, when the measure type is percent and you enter 10, the accrual rate is 10%.

Field	Details
AggregateObjectName	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The object that stores the aggregation results.
BenefitQualifierField	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The field on the aggregation object used to define thresholds for qualifying benefits (minimum or maximum).
CalcObjectId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Links to a calculation definition from the Data Processing Engine. This field is a relationship field. Relationship Name CalcObject Refers To BatchCalcJobDefinition
CalculationBasis	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the method used to calculate the rebate amount. Possible values are: • Accrual • Payout • PayoutAndAccrual—Payout and Accrual The default value is Payout.

Field	Details
CalculationMethod	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Defines how tiered rebate benefits are calculated. Possible values are: • Retrospective • Stepped The default value is Retrospective.
CalculationType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the type of rebate calculation logic to use. Possible values are: • AggregateBased—Aggregate Based • Custom • GrowthBased—Growth Based • PerTransaction—Per Transaction
ExecutionProcedureId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Links to business rules that define custom execution logic. This field is a relationship field. Relationship Name ExecutionProcedure Refers To ExpressionSet
FilterAction	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description Logical operator to apply between filter conditions. Possible values are: • <code>AllConditionsMet</code>—All Conditions Are Met (AND) • <code>AnyConditionMet</code>—Any Condition Is Met (OR) • <code>CustomLogic</code>—Custom Condition Logic • <code>NoConditionsMet</code>—No Conditions Are Met
<code>FilterCriteria</code>	Type textarea Properties Nillable Description Holds the filter conditions in textual format. Used to define eligibility criteria for rebate qualification.
<code>FilterLogic</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Logical formula used to combine filter conditions, typically using field references and logical operators.
<code>IsIntegratable</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description When selected, allows this rebate type to be applied on transactional records such as orders or opportunities. The default value is <code>false</code>.
<code>LastReferencedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description Date and the timestamp when the record was last referenced by the user. Useful for user activity tracking.

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Date and the timestamp when the record was last opened or viewed. Tracks user interaction history.
MeasureField	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The aggregation object field used with measure type and benefit value to calculate the rebate amount. This is required for the Amount per Unit and Percentage of Revenue measure types.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Unique name that identifies the rebate type configuration. Used as a reference label across related components.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Identifies the user or group that owns this record. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
ProductFilterType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description Specifies whether the rebate applies to included or excluded products. Possible values are: • <code>ExcludeProducts</code>—Exclude Products • <code>IncludeProducts</code>—Include Products
RebateMeasureType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the method to measure benefit payout. Possible values are: • <code>AmountperUnit</code>—Amount per Unit • <code>Custom</code> • <code>FixedAmount</code>—Fixed Amount • <code>PercentageOfRevenue</code>—Percentage of Revenue
RebateProgramId	Type reference Properties Create, Filter, Group, Sort, Update Description Links this rebate type to its parent rebate program. This field is a relationship field. Relationship Name RebateProgram Relationship Type Master-detail Refers To RebateProgram (the master object)
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Specifies whether the rebate type is currently active. Possible values are: • <code>Active</code>

Field	Details
	• <code>Inactive</code> The default value is <code>Inactive</code>.
<code>UnitOfMeasureId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Identifies the unit of measure associated with the rebate type. This field is a relationship field. Relationship Name UnitOfMeasure Refers To UnitOfMeasure
<code>ValidityDuration</code>	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Duration for which the inventory is eligible for price protection.
<code>ValidityDurationType</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Unit of time used to measure ValidityDuration. Possible values are: • <code>Days</code> • <code>Months</code> • <code>Years</code> The default value is <code>Years</code>.

Promotion

Represents a promotion for B2B or D2C stores. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Some of the fields on the Promotion object are available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
<code>AreQualItemsExclFromDiscounts</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Exclude qualifying items from discount. You can use this field to create buy-one-get-one promotions. The default value is false. This field is available in API version 56.0 and later.
<code>CurrencyIsoCode</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
<code>Description</code>	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Description of the promotion.
<code>DiscountOrder</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates whether to apply discounts first to the least expensive products or to the most expensive products. Possible values are:

Field	Details
	- LeastExpensive - MostExpensive The default value is MostExpensive. This field is available in API version 56.0 and later.
DiscountRestriction	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates whether to restrict the products that can be discounted based on the least expensive qualifying product. Possible values are: - LeastExpensive - None The default value is None. This field is available in API version 56.0 and later.
DisplayName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Display name of the promotion.
EndTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date and time when the promotion ends.
ExclusivityType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Determines whether a promotion can be combined with other promotions. Possible values are: No - Can be combined with other promotions.

Field	Details
	<code>Class</code> - Can't be combined with a promotion of the same class (product, order, or shipment), but allows for promotions of separate classes to be combined. For example, an order discount on top of a product discount. <code>Global</code> - Only promotion that can be applied to the order, regardless of class. The default value is <code>Class</code>. This field is available in API version 58.0 and later.
<code>IsActive</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the promotion is active (true) or inactive (false). The default value is false.
<code>IsApproachingDiscountApplicable</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates that the promotion shows an approaching discount message. Set an approaching discount threshold value on the <code>PromotionQualifier</code> object. This field is available in API version 64.0 and later. The default value is false.
<code>IsAutomatic</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether the promotion is automatic or manual. If the promotion is automatic, it automatically applies to eligible carts with no buyer action required. If the promotion is manual, the buyer applies a coupon to redeem the promotion. The default value is false.
<code>IsCommercePromotion</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if the promotion is a B2B Commerce promotion (true) or not (false).

Field	Details
	The default value is false.
IsTiered	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether the promotion uses promotion tiers (true) or not (false). This value can't be changed. The default value is false. A tiered promotion can have up to 10 associated tiers. This field is available in API version 57.0 and later.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced and not directly accessed.
MaximumUsageCount	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Maximum number of times the promotion can be applied to a cart. If left blank, the default value is 1. This field is available in API version 56.0 and later.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update

Field	Details
	Description Name of the promotion.
Objective	Type textarea Properties Create, Filter, Nillable, Sort, Update Description More information, if any, about the purpose of the promotion.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who created the promotion. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PriorityNumber	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Priority for the promotion. The priority determines which promotions apply first. The lower the number, the higher the priority.
QualifierCriteria	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description If a promotion has multiple qualifiers, this field determines whether all qualifiers must be met or whether any must be met for the promotion to apply. Possible values are: • All

Field	Details
	Any The default value is 'All'. This field is available in API version 53.0 and later.
StartDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date and time when the promotion begins.
TargetCriteria	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description If a promotion has multiple targets, indicates whether a cart must meet the criteria for any target or the criteria for all targets. Possible values are: - All - Any This field is available in API version 56.0 and later.
TermsAndConditions	Type textarea Properties Create, Nillable, Update Description Terms and conditions the buyer accepts before applying the promotion. This field is available in API version 53.0 and later.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PromotionFeed on page 55

Feed tracking is available for the object.

PromotionHistory on page 63

History is available for tracked fields of the object.

PromotionShare on page 67

Sharing is available for the object.

SEE ALSO:

- Promotion
- PromotionMarketSegment
- PromotionQualifier
- PromotionSegment
- PromotionSegmentBuyerGroup
- PromotionSegmentSalesStore
- PromotionTarget
- PromotionTier

PromotionLineItemRule

Lists compound conditions about a promotion. This object is available in API version 59.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AssociatedReferenceId	Type Reference Properties Create, Filter, Group, Sort Description ID of the associated reference. Relationship Name AssociatedReference Relationship Type Lookup Refers To PromotionQualifier, PromotionTarget
AssociatedType	Type Picklist

Field	Details
	Properties Create, Filter, Group, Restricted picklist, Sort Description Specifies the type of object the rule is associated with. Possible values are: - PromotionQualifier - PromotionTarget
Name	Type String Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the promotion rule.
OperatorType	Type Picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Operator type for promotion line item rule. Possible values are: - EQUAL_TO - GREATER_THAN - GREATER_THAN_OR_EQUAL_TO - LESS_THAN - LESS_THAN_OR_EQUAL_TO - NOT_EQUAL_TO The default value is EQUAL_TO.
OwnerId	Type Reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner. Relationship Name Owner Relationship Type Lookup

Field	Details
	Refers To Group, User
Type	Type Picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Specifies the type on which the rule is being applied. Possible values are: • Attribute • Price • Product • ProductCategory
TypeReferenceId	Type Reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the type. Relationship Name TypeReference Relationship Type Lookup Refers To Product2, ProductCategory
TypeValue	Type String Properties Create, Filter, Group, Nillable, Sort, Update Description Value of the type selected.

PromotionMarketSegment

Represents a market segment within B2B Commerce that promotions can be assigned to. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The PromotionMarketSegment object is available only if the B2B Commerce license is enabled.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the promotion segment.

Field	Details
PromotionId	Type reference Properties Create, Filter, Group, Sort Description The ID of the promotion that you want to associate with your promotion segment. This is a relationship field. Relationship Name Promotion Relationship Type Lookup Refers To Promotion
PromotionSegmentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the promotion segment that you want to associate with. This is a relationship field. Relationship Name PromotionSegment Relationship Type Lookup Refers To PromotionSegment

SEE ALSO:

[Promotion](#)
[PromotionMarketSegment](#)
[PromotionQualifier](#)
[PromotionSegment](#)
[PromotionSegmentBuyerGroup](#)
[PromotionSegmentSalesStore](#)
[PromotionTarget](#)
[PromotionTier](#)

PromotionQualifier

Represents the product, product category, or order that you want to target with your promotion qualifier in a B2B or D2C store. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The PromotionQualifier object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
ApproachingDiscountThreshold	Type currency Properties Create, Filter, Nillable, Sort, Update Description The amount that a customer has to reach before seeing an approaching discount message. For example, if a promotion qualifier minimum is set at \$150 and this field is set at \$50, then a customer receives a banner notification that they're approaching the discount when they have at least \$50 in their cart. This field is available in API version 64.0 and later.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
ExternalQualifier	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A qualifying product or product category stored outside of Salesforce. This field is available in API version 56.0 and later.

Field	Details
	 Note: This field is available through the API only.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.
MinimumAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description The minimum dollar amount that a buyer must purchase to qualify for the promotion.
MinimumQuantity	Type double Properties Create, Filter, Nillable, Sort, Update Description The minimum quantity that a buyer must purchase to qualify for the promotion.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the promotion qualifier.
PromotionId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort Description The ID of the promotion that you want to associate with your promotion qualifier. This is a relationship field. Relationship Name Promotion Relationship Type Lookup Refers To Promotion
PromotionTierId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the promotion tier associated with the qualifier. Only used with tiered promotions. This is a relationship field. This field is available in API version 57.0 and later. Relationship Name PromotionTier Relationship Type Lookup Refers To PromotionTier
QualifierId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the qualifier. This is a polymorphic relationship field. Relationship Name Qualifier Relationship Type Lookup Refers To Product2, ProductCategory

Field	Details
QualifierOperator	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Possible values are: • EQUAL_TO • NONE • NOT_EQUAL_TO
QualifierProductCategoryName	Type string Properties Filter, Group, Nillable, Sort Description The name of the product category referenced in the qualifier. This field is available in API version 55.0 and later.
QualifierProductName	Type string Properties Filter, Group, Nillable, Sort Description The name of the product referenced in the qualifier. This field is available in API version 55.0 and later.
QualifierProductSku	Type string Properties Filter, Group, Nillable, Sort Description The stock keeping unit of the product referenced in the qualifier. This field is available in API version 55.0 and later.
QualifierRuleCriteriaType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of qualifier rule criteria. Possible values are:

Field	Details
	- All - Any
QualifierType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of qualifier that you want to add to the promotion. <code>Product</code> applies the qualifier to a single product, <code>ProductCategory</code> to a predetermined group of products, and <code>TransactionTotal</code> to the entire order. Possible values are: - Product - ProductCategory - TransactionTotal

Associated Objects

This object has the following associated objects. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

PromotionQualifierFeed on page 55

Feed tracking is available for the object.

PromotionQualifierHistory on page 63

History is available for tracked fields of the object.

SEE ALSO:

- [Promotion](#)
- [PromotionMarketSegment](#)
- [PromotionQualifier](#)
- [PromotionSegment](#)
- [PromotionSegmentBuyerGroup](#)
- [PromotionSegmentSalesStore](#)
- [PromotionTarget](#)
- [PromotionTier](#)

PromotionSegment

Represents a promotion segment, which you can assign to different stores or buyer groups, allowing them to access the promotion. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The PromotionSegment object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the promotion segment.

Field	Details
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who created this promotion segment. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Associated Objects

This object has the following associated objects. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

PromotionSegmentFeed on page 55

Feed tracking is available for the object.

PromotionSegmentHistory on page 63

History is available for tracked fields of the object.

SEE ALSO:

- [Promotion](#)
- [PromotionMarketSegment](#)
- [PromotionQualifier](#)
- [PromotionSegment](#)
- [PromotionSegmentBuyerGroup](#)
- [PromotionSegmentSalesStore](#)
- [PromotionTarget](#)
- [PromotionTier](#)

PromotionSegmentBuyerGroup

Represents a promotion segment, associated with a buyer group, and used for B2B Commerce. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The PromotionSegmentBuyerGroup object is available only if the B2B Commerce license is enabled.

Fields

Field	Details
BuyerGroupId	Type reference Properties Create, Filter, Group, Sort Description The ID of the Buyer Group that you want to include in your market segment. This is a relationship field. Relationship Name BuyerGroup Relationship Type Lookup Refers To BuyerGroup
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record. This field is available in API version 53.0 and later.

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed. This field is available in API version 53.0 and later.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the promotion segment.
PromotionSegmentId	Type reference Properties Create, Filter, Group, Sort Description The ID of the promotion segment you want to associate with your buyer group. This is a relationship field. Relationship Name PromotionSegment Relationship Type Lookup Refers To PromotionSegment

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PromotionSegmentBuyerGroupFeed on page 55

Feed tracking is available for the object.

PromotionSegmentBuyerGroupHistory on page 63
History is available for tracked fields of the object.

SEE ALSO:

- [Promotion](#)
- [PromotionMarketSegment](#)
- [PromotionQualifier](#)
- [PromotionSegment](#)
- [PromotionSegmentBuyerGroup](#)
- [PromotionSegmentSalesStore](#)
- [PromotionTarget](#)
- [PromotionTier](#)

PromotionSegmentSalesStore

Represents a promotion segment, associated with a store, and used for B2B Commerce. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The PromotionSegmentSalesStore object is available only if the B2B Commerce license is enabled.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the promotion segment.
PromotionSegmentId	Type reference Properties Create, Filter, Group, Sort Description The ID of the promotion segment you want to associate with your store. This is a relationship field. Relationship Name PromotionSegment Relationship Type Lookup Refers To PromotionSegment
SalesStoreId	Type reference Properties Create, Filter, Group, Sort Description The ID of the store you want to include in your promotion segment. This is a relationship field. Relationship Name SalesStore

Field	Details
	Relationship Type Lookup
	Refers To WebStore

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PromotionSegmentSalesStoreFeed on page 55

Feed tracking is available for the object.

PromotionSegmentSalesStoreHistory on page 63

History is available for tracked fields of the object.

SEE ALSO:

[Promotion](#)

[PromotionMarketSegment](#)

[PromotionQualifier](#)

[PromotionSegment](#)

[PromotionSegmentBuyerGroup](#)

[PromotionSegmentSalesStore](#)

[PromotionTarget](#)

[PromotionTier](#)

PromotionTarget

Represents the product, product category, or order that you want to target with your promotion in a B2B Store or D2C store. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The PromotionTarget object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
AdjustmentAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description The promotion discount is expressed as an amount, not as a percentage.
AdjustmentPercent	Type percent Properties Create, Filter, Nillable, Sort, Update Description The percentage discount of the promotion. Valid values include numbers from 1 through 100.
AdjustmentType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of adjustment discount applied to the product or group of products. Possible values are: • <code>FixedAmountOffLineItemTotal</code>—Fixed amount off the total of all line items. • <code>FixedAmountOffTransaction</code>—Fixed amount off the entire transaction. This value is available in API version 56.0 and later. • <code>FixedAmountOffUnitPrice</code>—Fixed amount off the unit price. • <code>FixedPrice</code>—Fixed price for a product. This value is available in API version 56.0 and later. • <code>TotalFixedPrice</code>—Fixed price for a set number of products. Requires a quantity limit. This value is available in API version 56.0 and later. • <code>FixedAmountOffUnitPrice</code>—Fixed amount off the unit price. • <code>PercentageDiscount</code>—Percentage discount. • <code>BonusProduct</code>—Gift product at no additional cost after qualifying purchases. This value is available in API version 64.0 and later.
CurrencyIsoCode	Type picklist

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
ExternalTarget	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A target product or product category stored outside of Salesforce. This field is available in API version 56.0 and later.  Note: This field is available through the API only.
IsMinItemCountRequired	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If <code>true</code>, the max value in the <code>RestrictionQuantity</code> field must be met before the promotion is applied. The default value is <code>false</code>. This field is available in API version 56.0 and later.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string

Field	Details
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the promotion target.
PromotionId	Type reference Properties Create, Filter, Group, Sort Description The ID of the promotion that you want to reference. This is a relationship field. Relationship Name Promotion Relationship Type Lookup Refers To Promotion
PromotionTierId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the promotion tier associated with the target. Only used with tiered promotions. This is a relationship field. This field is available in API version 57.0 and later. Relationship Name PromotionTier Relationship Type Lookup Refers To PromotionTier
RestrictionQuantity	Type double Properties Create, Filter, Nillable, Sort, Update Description Maximum number of times the discount can be applied to the target. This field is available in API version 56.0 and later.

Field	Details
TargetId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the product or product category that you want to target. This is a polymorphic relationship field. Relationship Name Target Relationship Type Lookup Refers To Product2, ProductCategory
TargetOperator	Type enum Properties Create, Filter, Group, Restricted picklist, Sort, Update Description For product and category targets, specify if the qualifying product or item in the qualifying category must be in the cart to determine if the cart satisfies the promotions criteria. For example, a quantity or amount across one or more items. This field is available in API version 59.0 and later. Possible values are: • EQUAL_TO—Specifies that the qualifying product or item in the qualifying category must be in the cart. • NOT_EQUAL_TO—Specifies that the qualifying product or item in the qualifying category isn't required to be in the cart. • NONE—Specifies that none of the other possible values apply. If the target type is for an order, you must use none.
TargetProductCategoryName	Type string Properties Filter, Group, Nillable, Sort Description The name of the product category referenced in the target. This field is available in API version 55.0 and later.
TargetProductName	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The name of the product referenced in the target. This field is available in API version 55.0 and later.
TargetProductSku	Type string Properties Filter, Group, Nillable, Sort Description The stock keeping unit of the product referenced in the target. This field is available in API version 55.0 and later.
TargetRuleCriteriaType	Type enum Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Controls what promotion rules must be met for the promotion to be valid. This field is available in API version 59.0 and later. Possible values are: • ALL—Specifies that all of the promotion rules must be met. • ANY—Specifies that any of the promotion rules can be met.
TargetType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The target of the promotion. Possible values are: • Product—Applies the promotion to a single product. • ProductCategory—Applies the promotion to a group of products. • Shipping—Applies the promotion to all shipping methods on the order. • StandardShippingRate—Applies the promotion to a single shipping method on the order.

Field	Details
	Transaction—Applies the promotion to the entire order.

SEE ALSO:

- Promotion
- PromotionMarketSegment
- PromotionQualifier
- PromotionSegment
- PromotionSegmentBuyerGroup
- PromotionSegmentSalesStore
- PromotionTarget
- PromotionTier

PromotionTier

Represents a tier of a promotion that includes multiple tiers. A promotion can have up to 10 tiers. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last viewed this record or list view. If this value is null, it can mean that the user accessed this record or list view (<code>LastReferencedDate</code>) but didn't view it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the promotion tier.
PromotionId	Type reference Properties Create, Filter, Group, Sort Description ID of the promotion associated with the promotion tier. This field is a relationship field. Relationship Name Promotion Relationship Type Lookup Refers To Promotion
Rank	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Priority of the tier among the associated promotion's tiers. Tiers are evaluated in order from lowest to highest rank. Each tier in a promotion must have a unique rank.

Usage

Use promotion tiers with promotion qualifiers and promotion targets to create tiered promotions. Instead of associating one promotion qualifier and one promotion target with each promotion, associate one promotion qualifier and one promotion target with each promotion tier.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PromotionTierFeed on page 55

Feed tracking is available for the object.

PromotionTierHistory on page 63

History is available for tracked fields of the object.

SEE ALSO:

[Promotion](#)

[PromotionMarketSegment](#)

[PromotionQualifier](#)

[PromotionSegment](#)

[PromotionSegmentBuyerGroup](#)

[PromotionSegmentSalesStore](#)

[PromotionTarget](#)

[PromotionTier](#)

Prompt

Represents record details about an in-app guidance prompt or walkthrough. Available in API version 46.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. Because changing terms in our code can break current implementations, we maintained this object's name.

Prompts and walkthroughs help users discover your products and services, adopt your processes, or learn how to use a new feature. Add prompts and walkthroughs in Lightning Experience pages or apps or in supported Experience Cloud site pages. Add an optional action button or link that goes to a URL. Track views, action button clicks, and walkthrough completions.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To add, edit, manage, and view prompts and walkthroughs in Lightning Experience or in Experience Cloud sites, multiple permissions are required. See [Permissions for Creating and Accessing In-App Guidance](#) in Salesforce Help.

Prompts and Walkthroughs in Managed Packages

For considerations about including in-app guidance in a managed package, see [Guidelines for In-App Guidance in Managed Packages](#) in Salesforce Help.

For more information about creating managed packages, see [Create a First-Generation Managed Package](#).

Unmanaged packages must contain a namespace prefix. For more information, see [Register a Namespace for a First-Generation Managed Packages](#) and [What happens to my namespace prefix when I install a package?](#).

Fields

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates the language used in the org where the in-app guidance was created.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The label. Maximum of 80 characters.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can

Field	Details
	refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. - In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. - In orgs that aren't Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.

PromptAction

Represents how the user interacted with the in-app guidance prompt or walkthrough. Available in API version 46.0 and later.

Prompts and walkthroughs help users discover your products and services, adopt your processes, or learn how to use a new feature. Add prompts and walkthroughs in Lightning Experience pages or apps or in supported Experience Cloud site pages. Add an optional action button or link that goes to a URL. Track views, action button clicks, and walkthrough completions.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To add, edit, manage, and view prompts and walkthroughs in Lightning Experience or in Experience Cloud sites, multiple permissions are required. See [Permissions for Creating and Accessing In-App Guidance](#) in Salesforce Help.

Fields

Field	Details
<code>LastDisplayDate</code>	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Indicates the date the in-app guidance was last displayed to the user.

Field	Details
LastResult	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates the last user interaction. Valid values are: • CustomAction • Dismiss • Error • Finish—(walkthroughs only) • NoAction • NotSeen • Snooze
LastResultDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Indicates the date the in-app guidance was last interacted with.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the in-app guidance.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup

Field	Details
	Refers To Group, User
PromptVersionId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the PromptVersion object. This is a relationship field. Relationship Name PromptVersion Relationship Type Lookup Refers To PromptVersion
SnoozeUntil	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The timestamp for when the user's snooze request expires. The user won't see the prompt again until they navigate to the page after the snooze time expires.
StepCount	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the total number of steps in the walkthrough. Available in API version 49.0 and later.
StepNumber	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the number of the last step the user viewed or interacted with in a walkthrough. Maximum value is 10. Available in API version 49.0 and later.

Field	Details
TimesActionTaken	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Number of times that the user took action on the in-app guidance.
TimesDismissed	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Number of times that the user dismissed the in-app guidance.
TimesDisplayed	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Number of times that the in-app guidance was displayed to the user.
TimesSnoozed	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The total number of times the user snoozes the prompt.
UserId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the user. This is a relationship field. Relationship Name User Relationship Type Lookup Refers To User

Associated Objects

This object has the following associated objects. They are available in API version 46.0 and later.

PromptActionOwnerSharingRule

Sharing rules are available for the object.

PromptActionShare

Sharing is available for the object.

PromptError

Represents the error or warning associated with the PromptAction. Available in API version 52.0 and later.

Prompts and walkthroughs help users discover your products and services, adopt your processes, or learn how to use a new feature. Add prompts and walkthroughs in Lightning Experience pages or apps or in supported Experience Cloud site pages. Add an optional action button or link that goes to a URL. Track views, action button clicks, and walkthrough completions.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To add, edit, manage, and view prompts and walkthroughs in Lightning Experience or in Experience Cloud sites, multiple permissions are required. See [Permissions for Creating and Accessing In-App Guidance](#) in Salesforce Help.

Fields

Field	Details
IsError	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if the in-app guidance had an error <code>true</code> or a warning <code>false</code>. The default is <code>false</code>.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the PromptError record.

Field	Details
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the User or Group.
PromptActionId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the PromptAction that the PromptError is related to.
StepNumber	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the step number that the user encountered an error or warning in a walkthrough.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Indicates the type of error or warning. Possible values are: • NoAccessToApp—A step on this walkthrough is on an app that some of your users don't have access to. • NoAccessToPage—A step on the walkthrough is on a page that some of your users don't have access to. • ReferenceElementNotFound—The target element has moved or is no longer on your page. Targeted prompts attached to unavailable elements convert to floating prompts. Check your access to the element, or enter targeting mode and reassign the targeted prompt. • Unavailable—Users tried to open this walkthrough using its URL, but it's inactive or the users aren't licensed to see it. To make it accessible to users, check its settings or activate it.

Associated Objects

This object has the following associated objects. They are available in API version 52.0 and later.

PromptErrorOwnerSharingRule

Sharing rules are available for the object.

PromptErrorShare

Sharing is available for the object.

PromptActionOwnerSharingRule

Represents a rule which determines `PromptAction` sharing access for the owners. Available in API version 46.0 and later.

Prompts and walkthroughs help users discover your products and services, adopt your processes, or learn how to use a new feature. Add prompts and walkthroughs in Lightning Experience pages or apps or in supported Experience Cloud site pages. Add an optional action button or link that goes to a URL. Track views, action button clicks, and walkthrough completions.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To add, edit, manage, and view prompts and walkthroughs in Lightning Experience or in Experience Cloud sites, multiple permissions are required. See [Permissions for Creating and Accessing In-App Guidance](#) in Salesforce Help.

Fields

Field	Details
AccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Indicates the access level of users for in-app guidance. Valid values are <code>Read</code> and <code>Edit</code>.
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Description of the in-app guidance. Maximum of 255 characters.

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
GroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the group whose <code>PromptAction</code> are shared.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the in-app guidance.
UserOrGroupID	Type reference Properties Create, Filter, Group, Sort Description ID of the user or group with whom <code>PromptAction</code> access is shared.

PromptActionShare

Represents a sharing entry on a prompt action record. Available in API version 46.0 and later.

Prompts and walkthroughs help users discover your products and services, adopt your processes, or learn how to use a new feature. Add prompts and walkthroughs in Lightning Experience pages or apps or in supported Experience Cloud site pages. Add an optional action button or link that goes to a URL. Track views, action button clicks, and walkthrough completions.

You can only create, edit, and delete sharing entries for standard objects whose RowCause field is set to Manual. Sharing entries for standard objects with different RowCause values are created as a result of your Salesforce org’s sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren’t stored at all.

 **Note:** While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it’s possible that we’ll stop storing certain share records to improve performance. As a best practice, don’t create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To add, edit, manage, and view prompts and walkthroughs in Lightning Experience or in Experience Cloud sites, multiple permissions are required. See [Permissions for Creating and Accessing In-App Guidance](#) in Salesforce Help.

Fields

Field	Details
AccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Indicates the access level of users for in-app guidance. Valid values are Read, Edit, and All.
ParentId	Type reference Properties Create, Filter, Group, Sort Description ID of the parent.
RowCause	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is <code>Manual</code> . If no value is specified, the field defaults to <code>Manual</code> . All other <code>RowCause</code> values are read-only. After the sharing entry is created, this field can't be edited. Valid values include: <code>Rule</code>—The User or Group has access via a sharing rule. <code>GuestRule</code>—The User or Group has access via a guest user sharing rule. <code>Manual</code>—The User or Group has access because a User with "All" access manually shared the prompt action with them. <code>Owner</code>—The User is the owner of the prompt action.
<code>UserOrGroupId</code>	Type reference Properties Create, Filter, Group, Sort Description The ID of the User or Group.

PromptLocalization

Represents the translated value of a label for record details about in-app guidance when the Translation Workbench is enabled for your org. Available in API version 48.0 and later.

Prompts and walkthroughs help users discover your products and services, adopt your processes, or learn how to use a new feature. Add prompts and walkthroughs in Lightning Experience pages or apps or in supported Experience Cloud site pages. Add an optional action button or link that goes to a URL. Track views, action button clicks, and walkthrough completions.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To add, edit, manage, and view prompts and walkthroughs in Lightning Experience or in Experience Cloud sites, multiple permissions are required. See [Permissions for Creating and Accessing In-App Guidance](#) in Salesforce Help.

Prompts and Walkthroughs in Managed Packages

For considerations about including in-app guidance in a managed package, see [Guidelines for In-App Guidance in Managed Packages](#) in Salesforce Help.

For more information about creating managed packages, see [Create a First-Generation Managed Package](#).

Unmanaged packages must contain a namespace prefix. For more information, see [Register a Namespace for a First-Generation Managed Packages](#) and [What happens to my namespace prefix when I install a package?](#).

Fields

Field	Details
Language	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Indicates the language used in the org where the in-app guidance was created.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, NamespacePrefix is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that aren't Developer Edition orgs, NamespacePrefix is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
ParentId	Type reference Properties Create, Filter, Group, Sort Description ID of the in-app guidance.
Value	Type textarea Properties Create, Filter, Sort, Update

Field	Details
	Description The actual translated record details for the in-app guidance.

PromptVersion

Represents an in-app guidance prompt or walkthrough. Available in API version 46.0 and later.

Prompts and walkthroughs help users discover your products and services, adopt your processes, or learn how to use a new feature. Add prompts and walkthroughs in Lightning Experience pages or apps or in supported Experience Cloud site pages. Add an optional action button or link that goes to a URL. Track views, action button clicks, and walkthrough completions.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. Because changing terms in our code can break current implementations, we maintained this object's name.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To add, edit, manage, and view prompts and walkthroughs in Lightning Experience or in Experience Cloud sites, see [Considerations for Creating In-App Guidance](#) and [Permissions for Creating and Accessing In-App Guidance](#) in *Salesforce Help* for permissions.

Prompts and Walkthroughs in Managed Packages

For considerations about including in-app guidance in a managed package, see [Guidelines for In-App Guidance in Managed Packages](#) in *Salesforce Help*.

For more information about creating managed packages, see [Create a First-Generation Managed Package](#).

Unmanaged packages must contain a namespace prefix. For more information, see [Register a Namespace for a First-Generation Managed Packages](#) and [What happens to my namespace prefix when I install a package?](#).

Fields

Field	Details
ActionButtonLabel	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Label for the action button or link. Maximum of 25 characters. For a walkthrough, specify this value on the last step.

Field	Details
ActionButtonLink	Type url Properties Create, Filter, Nillable, Sort, Update Description URL for the action button or link. Maximum of 1,000 characters. You can't use the GROUP BY option in a SOQL query for this field. For a walkthrough, specify this value on the last step.
Body	Type textarea Properties Create, Update Description Body content. In API version 60.0 and later, enter up to 4,000 characters for all prompt types. In earlier API versions, enter up to 240 characters for floating prompts and targeted prompts. Enter up to 4,000 characters for docked prompts. For docked prompts, the maximum characters include HTML markup, not just readable text.
DelayDays	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Number of days between occurrences. For a walkthrough, specify this value on the first step.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description. Maximum of 255 characters.
DismissButtonLabel	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Label for the dismiss button of a floating or targeted prompt. Maximum of 15 characters.

Field	Details
DisplayPosition	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The position of a floating prompt on the page. Valid values are: • TopLeft • TopCenter • TopRight • MiddleLeft • MiddleCenter • MiddleRight • BottomLeft • BottomCenter • BottomRight
DisplayType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of prompt. Valid values are: • DockedComposer—A docked prompt • FloatingPanel—A floating prompt • Targeted—A targeted prompt. Available in API version 52.0 and later.
ElementRelativePosition	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The location of a targeted prompt relative to the element. This field is available in API version 52.0 and later. Valid values are: • BottomCenter • BottomLeft • BottomRight • LeftBottom • LeftCenter • LeftTop

Field	Details
	• RightBottom • RightCenter • RightTop • TopCenter • TopLeft • TopRight
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date to stop showing the in-app guidance. For a walkthrough, specify this value on the first step.
Experience	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description This field corresponds to the Environment picklist in In-App Guidance Builder. Available in version 60.0 and later. Possible values are: • Lightning—Default. The in-app guidance is used in a Lightning Experience app or page. • Site—The in-app guidance is used in a supported Experience Cloud site page.
ExperienceContextId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Required if the value of Experience is Site. The ID of the Experience Cloud site context associated with the in-app guidance prompt. Available in version 60.0 and later. This field is a polymorphic relationship field. Relationship Name ExperienceContext Relationship Type Lookup Refers To Site

Field	Details
Header	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Label for the header of a docked prompt. This value is the label contained in the window's browser bar. Maximum of 36 characters.
ImageAltText	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the alt text of an image. Required if <code>ImageLocation</code> or <code>ImageID</code> is specified.
ImageId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the ContentAsset that holds the image. Required if <code>ImageLocation</code> or <code>ImageAltText</code> is specified. This is a relationship field. Relationship Name Image Relationship Type Lookup Refers To ContentAsset
ImageLocation	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates the location of the image in relation to the body text. Required if <code>ImageID</code> or <code>ImageAltText</code> is specified. Valid values are: • Top • Bottom • Right, which is for floating or targeted prompts only • Left, which is for floating or targeted prompts only

Field	Details
IndexWithIsPublished	Type string Properties Filter, idLookup, Nillable, Sort Description Used by Salesforce for efficient querying.
IndexWithoutIsPublished	Type string Properties Filter, idLookup, Nillable, Sort Description Used by Salesforce for efficient querying.
IsPublished	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the in-app guidance is active (<code>true</code>) or not (<code>false</code>).
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The label. Maximum of 80 characters.
ParentId	Type reference Properties Create, Filter, Group, Sort Description ID of the in-app guidance. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To Prompt

Field	Details
PublishedByUserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the user who activated the in-app guidance. If the in-app guidance is part of a package, this value is the user who installed the package. This is a relationship field. Relationship Name PublishedByUser Relationship Type Lookup Refers To User
PublishedDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the date the in-app guidance was activated. If installed from a package, this value is the date when the package was installed. For walkthroughs, this field can only be specified on the first step.
ReferenceElementContext	Type textarea Properties Create, Nillable, Update Description Used by Salesforce to identify the element that the targeted prompt is associated with. Available in API version 52.0 and later.
ShouldDisplayActionButton	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether an action button or link is included (<code>true</code>) or not (<code>false</code>).
ShouldIgnoreGlobalDelay	Type boolean

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the in-app guidance ignores the global time delay and instead shows on page load (<code>true</code>) or not (<code>false</code>). This field is available in API version 48.0 and later.
StartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the date to start showing the in-app guidance. For a walkthrough, specify this value on the first step. In API version 48.0 and earlier, this field is required.
StepNumber	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Required for walkthroughs only. Indicates the number of the last step the user viewed or interacted with in a walkthrough. Include up to 10 steps. Numbers must be consecutive without repeated or skipped numbers. Available in API version 49.0 and later.
TargetAppDeveloperName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The app's developer name where the in-app guidance appears. Deprecated in API version 51.0 and later.
TargetAppNamespacePrefix	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The app's namespace prefix where the in-app guidance appears. This value must match the target app's <code>NamespacePrefix</code> in the org that the package is being installed into. Maximum of 15 characters. Deprecated in API version 51.0 and later.

Field	Details
TargetPageKey1	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Required. Used by Salesforce to identity the prompt's page location along with targetPageKey2, targetPageKey3, targetPageKey4, and targetPageType.
TargetPageKey1Ref	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Used by Salesforce to identify the prompt's page location along with TargetPageKey2, TargetPageKey3, TargetPageKey4, and TargetPageType.
TargetPageKey2	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Used by Salesforce to identify the prompt's page location along with TargetPageKey1, TargetPageKey3, TargetPageKey4, and TargetPageType.
TargetPageKey3	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Used by Salesforce to identify the prompt's page location along with TargetPageKey1, TargetPageKey2, TargetPageKey4, and TargetPageType.
TargetPageKey4	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Used by Salesforce to identify the page location along with TargetPageKey1, TargetPageKey2, TargetPageKey3, and TargetPageType. This field is available in API version 53.0 and later.

Field	Details
TargetPageType	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The type of page where the in-app guidance appears.
TargetRecordType	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Used by Salesforce to determine if in-app guidance is specific to a record type. This field is available in API version 53.0 and later. Relationship Name TargetRecordType Relationship Type Lookup Refers To RecordType
ThemeColor	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates which custom theme color is applied to the in-app guidance. Required if <code>ThemeSaturation</code> is specified. For a walkthrough, specify this value on the first step. Valid values are: • <code>Theme1</code>—derived from the current brand color • <code>Theme2</code>—derived from the current page background color • <code>Theme3</code>—derived from the current global header color • <code>Theme4</code>—derived from the current app theme color
ThemeSaturation	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description Indicates which color value, or saturation, is applied to the in-app guidance that has a custom theme color. Required if <code>ThemeColor</code> is specified. For a walkthrough, specify this value on the first step. Valid values are: • <code>Dark</code> • <code>Light</code>
<code>TimesToDisplay</code>	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Required if recurrences are scheduled. The maximum number of times to show the in-app guidance. Salesforce detects whether the user interacts with the in-app guidance, then determines whether to show the in-app guidance again or cancel scheduled recurrences. Maximum value of 30. For a walkthrough, specify this value on the first step.
<code>Title</code>	Type string Properties Create, Filter, Group, Sort, Update Description Required. The label for the title. Maximum of 36 characters.
<code>UserAccess</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates which permissions can see the in-app guidance. Valid values are: • <code>Everyone</code>, which indicates that there's no permission restrictions • <code>SpecificPermissions</code>, which indicates that only users with all the specific user permissions specified can see the in-app guidance In API version 48.0 and earlier, this field is required.
<code>UserProfileAccess</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates which profiles can see the in-app guidance. This field is available in API version 48.0 and later. Valid values are:

Field	Details
	• <code>Everyone</code>, which indicates that there are no profile restrictions • <code>SpecificProfiles</code>, which indicates that users with any of the specified user profiles can see the in-app guidance
<code>VersionNumber</code>	Type int Properties Create, Filter, Group, Sort, Update Description Required. The number remains 1 since multiple versions aren't saved in the org.
<code>VideoLink</code>	Type url Properties Create, Filter, Nillable, Sort, Update Description The embed URL for a video in a docked prompt. Maximum of 1,000 characters. You can specify this field or the <code>image</code> field, but not both. This field is available in API version 48.0 and later. See Considerations for Creating In-App Guidance.

PromptVersionLocalization

Represents the translated value of a label for-app guidance when the Translation Workbench is enabled for your org. Available in API version 48.0 and later.

Use prompts and walkthroughs to display announcements, training, or news to users within the app. Choose to add an action button or link that links to a URL of your choice. Track views, action button clicks, and walkthrough completions.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To add, edit, manage, and view prompts and walkthroughs in Lightning Experience or in Experience Cloud sites, multiple permissions are required. See [Permissions for Creating and Accessing In-App Guidance](#) in Salesforce Help.

Prompts and Walkthroughs in Managed Packages

For considerations about including in-app guidance in a managed package, see [Guidelines for In-App Guidance in Managed Packages](#) in Salesforce Help.

For more information about creating managed packages, see [Create a First-Generation Managed Package](#).

Unmanaged packages must contain a namespace prefix. For more information, see [Register a Namespace for a First-Generation Managed Packages](#) and [What happens to my namespace prefix when I install a package?](#).

Fields

Field	Details
Language	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Indicates the language used in the org where the in-app guidance was created.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, NamespacePrefix is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that aren't Developer Edition orgs, NamespacePrefix is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
ParentId	Type reference Properties Create, Filter, Group, Sort Description ID of the in-app guidance.
Value	Type textarea Properties Create, Filter, Sort, Update

Field	Details
	Description The actual translated label of the in-app guidance.

Prospect

Represents a prospect. A prospect is an individual who has shared contact information, but isn't yet qualified. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Address	Type address Properties Filter, Nillable Description Street address of the prospect. Up to 255 characters are allowed.
AnnualRevenue	Type currency Properties Create, Filter, Nillable, Sort, Update Description The prospect company's yearly revenue.
City	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description City that's included in the prospect's address.
Company	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The prospect's company.
ConvertedAccountId	Type reference Properties Filter, Group, Nillable, Sort Description Object reference ID that points to the account into which the prospect converted. This is a relationship field. Relationship Name ConvertedAccount Refers To Account
ConvertedContactId	Type reference Properties Filter, Group, Nillable, Sort Description Object reference ID that points to the contact into which the prospect converted. This is a relationship field. Relationship Name ConvertedContact Refers To Contact
ConvertedDate	Type date Properties Filter, Group, Nillable, Sort Description Date on which this prospect was converted.
ConvertedLeadId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description Object reference ID that points to the lead into which the prospect has been converted. This is a relationship field. This field is a relationship field. Relationship Name ConvertedLead Refers To Lead
ConvertedOpportunityId	Type reference Properties Filter, Group, Nillable, Sort Description Object reference ID that points to the opportunity into which the prospect has been converted. This is a relationship field. Relationship Name ConvertedOpportunity Refers To Opportunity
Country	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The Prospect's country.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Available only for organizations with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.
Description	Type textarea Properties Create, Nillable, Update

Field	Details
	Description The prospect's description.
Email	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description The prospect's email address.
FirstName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The prospect's first name. Up to 40 characters allowed.
GenderIdentity	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The prospect's self-identified experience of their gender, which does or doesn't correspond to the prospect's designated sex at birth.
GeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Accuracy level of the geocode for the address. For details on geolocation compound fields, see Geolocation Compound Field on page 18.
Industry	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Primary business of the prospect's company
IsConverted	Type boolean

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether the prospect has been converted (<code>true</code>) or not (<code>false</code>). Label is Converted.
LastName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Required. The Last name of the prospect. Up to 80 characters are allowed.
Latitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>Longitude</code> to specify the precise geolocation of an address. Acceptable values are numbers between -90 and 90 up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations on page 19.
LeadSource	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The origin or source of the lead.
Longitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>Latitude</code> to specify the precise geolocation of an address. Acceptable values are numbers between -180 and 180 up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations on page 19.
Name	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description Concatenation of <code>FirstName</code> , <code>MiddleName</code> , <code>LastName</code> , and <code>Suffix</code> up to 203 characters, including whitespaces.
<code>NumberOfEmployees</code>	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Number of employees at the prospect's company. Label is Employees .
<code>Phone</code>	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description The prospect's phone number.
<code>PostalCode</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Postal code that's included in the prospect's address. Label is Zip/Postal Code .
<code>ProspectRecordName</code>	Type string Properties Filter, Group, idLookup, Sort Description The name of the prospect record used for managing prospects.
<code>ProspectStatus</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The status of the prospect. Possible values are: • Contacted • New

Field	Details
	• Nurturing • Qualified • Unqualified The default value is New.
Salutation	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The prospect's preferred title. Possible values are: • Dr . • Mr . • Mrs . • Ms . • Mx . • Prof .
State	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description State that's included in the prospect's address.
Street	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Street number or name that's included in the prospect's address.
Title	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The prospect's business title, such as CFO or CEO. The maximum size is 128 characters. When converting a prospect to a person account, the conversion fails if the prospect Title field contains more than 80 characters.

ProspectingAgentDataSource

For internal use only.

ProspectingAgentRcmdTarget

Represents prospecting information suggested by generative AI. This object is available in API version 66.0 and later.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

This object is available if Agentforce Prospecting is enabled in your org and your org has an Agentforce for Sales or an Agentforce for an Industry add-on license. To access this object, you need the Sales Agentic Prospecting Manager user permission.

Fields

Field	Details
ExpirationDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date the recommendation expires, after which the recommendation is automatically deleted.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Required. The ID associated with the owner of the AI-generated recommendation. The owner can be an individual user or a list. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User

Field	Details
Rationale	Type textarea Properties Create, Nillable Description The explanation of why the agent recommended the target contact or lead. The rationale provides context to guide users in their decision making.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The status of the AI-generated recommendation. Possible values are: • Accepted • New – Default • Rejected
TargetId	Type reference Properties Create, Filter, Group, Nillable, Sort Description Required. The ID associated with the contact or lead recommended by the AI agent. This field is a polymorphic relationship field. Relationship Name Target Refers To Contact, Lead

ProspectingAgentSpec

For internal use only.

ProspectingAgentSpecParm

For internal use only.

ProspectingAgentUserSpec

For internal use only.

ProrationPolicy

Defines how the price of a subscription is divided into time periods and how the price is calculated for each time period. This object is available in API version 55.0 and later.

The proration policy defines whether partial periods are allowed and how remainder amounts are handled.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Special Access Rules

This object is available when Subscription Management is enabled.

Fields

Field	Details
<code>ArePartialPeriodsAllowed</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether a subscription can be canceled partway through a period. Set the value to <code>True</code> if a subscription can be canceled partway through a period. Otherwise, set the value to <code>false</code>. For example, if the proration period is monthly and this field is <code>true</code>, then customers can cancel a subscription partway through the month. If the proration period is monthly and this field is <code>false</code>, then the subscription is canceled at the end of the current month. The default value is <code>false</code>.
<code>LastReferencedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list <code>viewLastReferencedDate</code> but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort Description The name of the proration policy.
ProrationPolicyType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The type of proration policy. Possible values are: • <code>StandardTimePeriods</code>—Indicates that the proration policy divides the subscription into similar time periods, and prorates the subscription using the time periods. For example, a monthly subscription that's subscribed to for 12 months for a total amount of \$120 is prorated as \$10 per month.
RemainderStrategy	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Indicates how the leftover amount from the price calculation is allocated. For example, if the total amount is \$100 and the subscription has 12 periods, the price per period is \$8.33, with \$0.04 remaining. To indicate that the \$0.04 is included in the first period, use the value <code>AddToFirst</code>. To indicate that the \$0.04 is included in the final period, use the value <code>AddToLast</code>. Possible values are: • <code>AddToFirst</code>—Add the remaining amount to the first period. • <code>AddToLast</code>—Add the remaining amount to the last period.

PublicComplaint

Represents the complaints submitted by public users. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Fields added in API version 58.0 are available if the add-on license for Financial Services Cloud is enabled.

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the Account associated with this complaint. This field is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
BusinessAddress	Type textarea Properties Create, Filter, Nillable, Sort, Update Description The address of the business.
BusinessName	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The name of the business.
CauseSubtype	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The subtype of complaint cause. This field is available in API version 58.0 and later. Possible values are: Misleading advertisement or documentation
CauseType	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The type of complaint cause. This field is available in API version 58.0 and later. Possible values are: Product Communication
Comments	Type textarea Properties Create, Nillable, Update Description Additional details about the complaint. This field is available in API version 51.0 and later.
CompensationAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description Any amount of money offered to resolve the complaint. This field is available in API version 58.0 and later.
ComplaintCaseId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The ID of the related Case. This field is available in API version 58.0 and later. This field is a relationship field. Relationship Name ComplaintCase Relationship Type Lookup Refers To Case
ComplaintCaseStatus	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Sort Description The status of the related Case. This field is available in API version 58.0 and later. Possible values are: • Closed • Escalated • In Progress • Merged • New • On Hold • Response Received • Waiting for Customer • Working The default value is New.
ComplaintSubType	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The subtype of complaint. All values except <code>Fire Safety</code> are available in API version 58.0 and later. Possible values are: • Account Opening/Closure • Amount Not Dispensed • Attempts to Collect Debt not Owed

Field	Details
	• Auto Debit Mandate • Communication Tactics • Credit Limit Changed • Credit Report / Credit Score • Delays / Timescales • Disputes over sums/charges • Errors / not following instructions • Fire Safety • Fraud Handling • Inaccessible ATMs • Inaccessible Branch Entrances • Inaccessible Mobile banking features • Inaccessible Website • Misleading Advertising • Mobile Banking - Features or Functionality • No Written Notification About Debt • Online Banking - Features or Functionality • Other General Admin/Customer Service • Others • Problem when Making Payments • Product Disclosure Information • Product Performance/Features • Unauthorised Transaction(s) • Unclear Arrangement • Unclear Guidance • Unsuitable Advice
ComplaintSummary	Type textarea Properties Create, Nillable, Update Description The summary of customer complaints and related cases. This field is available in API version 62.0 and later.
ComplaintType	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The type of complaint. All values except <code>Safety</code> are available in API version 58.0 and later. Possible values are: • <code>Accessibility Issues</code> • <code>Advising, Selling and Arranging</code> • <code>Digital or Technology</code> • <code>Financial Hardship or Collections</code> • <code>General Admin/ Customer Service</code> • <code>Information, sums/ charges or Product Performance</code> • <code>Lending / Credit</code> • <code>Marketing or Corporate Communications</code> • <code>Others</code> • <code>Safety</code> • <code>Transaction Related</code>
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description A description of the complaint.
Email	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description The email of the complainant.
EscalationCause	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The reason the complaint was escalated. This field is available in API version 58.0 and later. Possible values are: • <code>Alleged ADA Violation</code> • <code>Alleged Discrimination</code> • <code>Alleged MLA Violation</code>

Field	Details
	• Alleged SCRA Violation • Alleged UDAAP Violation • Consumer Protection Agency Involvement • Lawsuit Filed • Media Involvement • None • Received by Executive Leadership The default is None.
FirstName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The given name of the complainant.
IncidentDate	Type date Properties Create, Filter, Group, Sort, Update Description The date of the incident. The default is the date this record was created, but this field is editable.
IsComplainantAuthorized	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Whether the person who filed the complaint is an authorized representative of the Account. This field is available in API version 58.0 and later. The default value is <code>false</code>.
IsReporterConfidential	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The reporter's request for confidentiality. The default value is <code>false</code>.

Field	Details
LastName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The family name of the complainant.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, possibly the user only accessed this record or list view (<code>LastReferencedDate</code>) but didn't view it.
MobileNumber	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description The mobile number of the complainant.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the complaint.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description The ID of the complaint owner. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
Priority	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The priority of the complaint. Possible values are: • Critical • High • Low • Medium The default value is Medium.
ProductType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The product that the complaint is about. This field is available in API version 58.0 and later. Possible values are: • ATM / debit card • Credit Card or Prepaid Card • Insurance • Investments • Merchant Services • Mobile / electronic banking • Money transfers, virtual currency, and money services • Mortgage / Home Finance • Other

Field	Details
	• Personal Loan / other loans • Vehicle loan or lease
ReceivedDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date the complaint was received. This field is available in API version 58.0 and later.
ReferenceRecordId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The asset, vehicle, or financial account that's associated with the public complaint. This field is available in API version 64.0 and later with Automotive Cloud. This field is a relationship field. Relationship Name ReferenceRecord Relationship Type Lookup Refers To Financial Account, Asset, Vehicle, Product2
ReporterAddress	Type textarea Properties Create, Filter, Nillable, Sort, Update Description The address of the reporter for further communication.
ReporterCategory	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Role of the reporter in the organization. Possible values are: • Childcare Providers • Healthcare worker

Field	Details
	• Law Enforcement • Medical Examiners • Mental Health Professionals • Other • School Personnel • Social Worker The default value is School Personnel.
ReporterOrganization	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The organization the reporter is part of.
ShouldInclInRegulatoryRpt	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Whether this complaint must be included in a regulatory report. This field is available in API version 58.0 and later. The default value is false.
SourceType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The source of the complaint. This field is available in API version 58.0 and later. Possible values are: • Branch • Consumer Protection Agency • Contact Centre • Mobile App • Regulatory Agency • Social Media • Web Chat

Field	Details
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The status of the complaint. Possible values are: • In Review • Resolved • Submitted The default value is Submitted.
Subject	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Subject of the complaint. This field is available in API version 51.0 and later.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[PublicComplaintFeed](#) on page 55

Feed tracking is available for the object.

[PublicComplaintHistory](#) on page 63

History is available for tracked fields of the object.

[PublicComplaintOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[PublicComplaintShare](#) on page 67

Sharing is available for the object.

PurchaseQuantityRule

Represents a rule that restricts the quantity of a product that can be purchased. The rule can be an increment, minimum, or maximum rule. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The `PurchaseQuantityRule` object is available only if the B2B Commerce license is enabled.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The ISO code for the currency that's specified on the buyer's account. Default value is <code>USD</code>. Possible values are: • <code>EUR</code>—Euro • <code>USD</code>—U.S. Dollar
Increment	Type double Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description Quantity of product that can be added with each increase.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last viewed this record or list view. If this value is null, and <code>LastReferenceDate</code> is not null, the user accessed this record or list view indirectly.
Maximum	Type double Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description Maximum quantity that can be purchased.
Minimum	Type double Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description Minimum quantity that can be purchased.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the purchase quantity rule.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the creator of this object. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

PushTopic

Represents a query that is the basis for notifying Streaming API clients of changes to records in an org. This object is available in API version 21.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

- This object is available only if Streaming API is enabled for your org.
- Users with the Create permission can create this record.
- To receive notifications, users must have read access on both the object in the PushTopic query and the PushTopic itself.

Fields

Field	Details
ApiVersion	Type double Properties Create, Filter, Sort, Update Description Required. API version to use for executing the query specified in <code>Query</code>. It must be an API version greater than 20.0. If your query applies to a custom object from a package, this value must match the package's <code>ApiVersion</code>. Example value: 66.0
Description	Type string Properties Create, Filter, Nillable, Sort, Update Description Description of the PushTopic. Limit: 400 characters
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the record currently counts towards the organization's allocation.

Field	Details
Name	Type string Properties Create, Filter, Group, Sort, Update Description Required. Descriptive name of the PushTopic, such as <code>MyNewCases</code> or <code>TeamUpdatedContacts</code>. Limit: 25 characters. This value identifies the channel and must be unique.
NotifyForFields	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Specifies which fields are evaluated to generate a notification. Possible values are: • All • Referenced (default) • Select • Where
NotifyForOperationCreate	Type boolean Properties Create, Filter, Update Description <code>true</code> if a create operation should generate a notification, otherwise, <code>false</code>. Defaults to <code>true</code>. This field is available in API version 29.0 and later.
NotifyForOperationDelete	Type boolean Properties Create, Filter, Update Description <code>true</code> if a delete operation should generate a notification, otherwise, <code>false</code>. Defaults to <code>true</code>. Clients must connect using the <code>cometd/29.0</code> (or later) Streaming API endpoint to receive delete and undelete event notifications. This field is available in API version 29.0 and later.
NotifyForOperationUndelete	Type boolean

Field	Details
	Properties Create, Filter, Update Description <code>true</code> if an undelete operation should generate a notification, otherwise, <code>false</code>. Defaults to <code>true</code>. Clients must connect using the <code>cometd/29.0</code> (or later) Streaming API endpoint to receive delete and undelete event notifications. This field is available in API version 29.0 and later.
<code>NotifyForOperationUpdate</code>	Type boolean Properties Create, Filter, Update Description <code>true</code> if an update operation should generate a notification, otherwise, <code>false</code>. Defaults to <code>true</code>. This field is available in API version 29.0 and later.
<code>NotifyForOperations</code>	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Specifies which record events may generate a notification. In API version 29.0 and later, this field is read-only, and doesn't contain information about delete and undelete events. Use <code>NotifyForOperationCreate</code>, <code>NotifyForOperationDelete</code>, <code>NotifyForOperationUndelete</code> and <code>NotifyForOperationUpdate</code> to specify which record events should generate a notification. Possible values are: • All (default) • Create • Extended • Update A value of <code>Extended</code> means that neither create or update operations are set to generate events.
<code>Query</code>	Type string Properties Create, Filter, Sort, Update Description Required. The SOQL query statement that determines which record changes trigger events to be sent to the channel.

Field	Details
	Limit: 1,300 characters

Usage

The PushTopic defines when notifications are generated in the channel. Determine which fields to configure by checking out these links in the *Streaming API Developer Guide*.

- [PushTopic Queries](#)
- [Events](#)
- [Notifications](#)

SEE ALSO:
[Streaming API Developer Guide](#)

PushUpgradeCustomization

Customized push upgrades allow a package subscriber to block push upgrades to their org. Package developers control which subscribers can opt into customized push upgrades. Each push upgrade customization maps to a specific package and to a specific subscriber org. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
CustomUpgradeType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The type of push upgrade customization. Possible values are: • <code>BlockedBySubscriber</code>—Blocked By Subscriber • <code>None</code> The default value is <code>None</code>.

Field	Details
HasRestrictionEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the subscriber org has blocked push upgrades. The default value is <code>false</code>.
IsCustomUpgradeAllowed	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the package developer has allowed a subscriber to opt into customized push upgrades. The default value is <code>false</code>.
IsRestrictionOverridden	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether customized push upgrades have been overridden by Salesforce Customer Support for the subscriber org. The default value is <code>false</code>.

QueuedExecutionEventLog

Queued Execution events contain details about queued executions—for example, batch Apex. This object is available in API version 65.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
ClientIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP".
CpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DatabaseTotalTime	Type double Properties Filter, Nillable, Sort Description The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and DB_CPU_TIME. Compare this field to CPU_TIME to determine whether performance issues are occurring in the database layer or in your own code.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.
RequestIdIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.

Field	Details
RequestStatus	Type string Properties Filter, Group, Nillable, Sort Description The status of the request for a page view or user interface action. For example: • S—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned. • F—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only. • U—Undefined • A—Authorization Error • R—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page. • N—Not Found. 404 error. This field can have a blank value.
RunTime	Type double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT.

Field	Details
	For example: 20130715233322.670.
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: /home/home.jsp.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943
UserType	Type string Properties Filter, Group, Nillable, Sort Description The category of user license. Possible values are: • CsnOnly—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users. • CspLitePortal—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site. • CustomerSuccess—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. • Guest—Users whose access is limited so that your customers can view and interact with your site without logging in. • PowerCustomerSuccess—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy. • PowerPartner—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site.

Field	Details
	• SelfService—Users whose access is limited because they're organization customers and access the application through a self-service portal. • Standard—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

QueueRoutingConfig

Represents the settings that determine how work items are routed to agents. This object is available in API version 32.0 and later.

Supported Calls

`create()`, `delete()`, `query()`, `retrieve()`, `update()`

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.

As of Spring '20 and later, only authenticated internal and external users can access this object.

Fields

Field	Details
CapacityPercentage	Type percent Properties Create, Filter, Nillable, Sort, Update Description The percentage of an agent's capacity for work items that's consumed by a specific type of work item from this service channel. Voice calls must have a capacity percentage of <code>100</code>. If an agent receives a voice call, the agent won't receive new work items until the call ends, because at that point the agent's capacity will have reached 100%. This field is available in API version 33.0 and later.
CapacityWeight	Type double Properties Create, Filter, Nillable, Sort, Update Description The amount of an agent's capacity for work items that's consumed by a work item from this service channel.

Field	Details
	For example, if an agent has a capacity of 6, and cases are assigned a capacity weight of 2, an agent can be assigned up to 3 cases before the agent is at capacity and can't receive new work items. Voice calls must use the entire capacity weight. This field is available in API version 33.0 and later.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record. Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field. Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
DropAdditionalSkillsTimeout	Type int Properties Create, Filter, Group Nillable, Sort, Update Description The number of seconds to wait before a skill marked as Additional Skill is dropped from Omni-Channel routing. The case is then routed to the best-matched agent even if they don't have all the skills.
IsAttributeBased	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this routing is attribute-based. Available in API version 45.0 and later.
Language	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the presence status.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The label of the presence status.
OverflowAssigneeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the user or queue that's set as the Overflow Assignee.
PausedCapacityPercentage	Type percent Properties Create, Filter, Nillable, Sort, Update Description The percentage of an agent's capacity for work items that's consumed by a paused work item from this service channel. The paused capacity feature is available with status-based capacity and Enhanced Omni-Channel only.
PausedCapacityWeight	Type double Properties Create, Filter, Nillable, Sort, Update Description The amount of an agent's capacity for work items that's consumed by a paused work item from this service channel. The paused capacity feature is available with status-based capacity and Enhanced Omni-Channel only.
PushTimeout	Type int Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The number of seconds set for push timeout. 0 is returned when push timeout isn't enabled. Available in API version 36.0 and later.
RoutingModel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The routing type that determines how work items are routed (pushed) to agents. Possible values are <code>Least Active</code> and <code>Most Available</code> .
RoutingPriority	Type int Properties Create, Filter, Group, Sort, Update Description The priority in which work items from the service channels that are related to this routing configuration are routed to agents. Work items from routing configurations that have lower priority values (for example, <code>0</code>) are routed to agents first.
ServiceChannelId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the service channel that's associated with this configuration. This field is available in API version 32.0 and earlier.

Question

Represents a question in a zone that users can view and reply to.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is only available if the Answers permission and AnswersEnabled preference or PortalFeed permission and PortalFeedEnabled preference are enabled in your org.

Fields

Field	Details
BestReplyId	Type reference Properties Filter, Group, Nillable, Sort, Update Description The ID of the reply that has been identified as the best answer to the question. Use the user interface to identify the best answer for a question.
BestReplySelectedById	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user who selected the best answer to the question. This field is available in API version 24.0 and later. In API version 24.0 through version 29.0, you must update this field using the UI. In API version 30.0 and later, you can update this field using the API.
Body	Type textarea Properties Create, Nillable, Update Description Description of the question.
CommunityId	Type reference Properties Create, Filter, Group, Sort Description The zone ID associated with the question. After you create a question, you can't change the zone ID associated with that question.
CreatorFullPhotoUrl	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description URL of the user's profile photo from the feed. Chatter Answers must be enabled to view this field. This field is available in API version 26.0 and later.
CreatorName	Type string Properties Filter, Group, Nillable, Sort Description Name of the user who posted the question or reply. Only the first name of internal users (agents) appears to portal users in the feed. Chatter Answers must be enabled to view this field. This field is available in API version 26.0 and later.
CreatorSmallPhotoUrl	Type string Properties Filter, Group, Nillable, Sort Description URL of the user's thumbnail photo from the feed. Chatter Answers must be enabled to view this field. This field is available in API version 26.0 and later.
HasSingleFieldForContent	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the content of a Chatter Answers question is: • Included in only one field: <code>Title</code> if the content is unformatted and less than 255 characters; or <code>Body</code> if the content is formatted or more than 255 characters (<code>true</code>) • Included in two fields: <code>Title</code> and <code>Body</code> (<code>false</code>) This field also determines if content displays in one or two fields in Chatter Answers question feeds. This field is available in API version 25.0 and later.
LastReferencedDate	Type date Properties Filter, Nillable, Sort, Update

Field	Details
	Description The timestamp for when the current user last viewed a record related to this record.
LastReplyDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time the last reply (child Reply object) was posted.
LastReplyId	Type reference Properties Filter, Group, Nillable, Sort Description Read only. The ID of the last reply (child Reply object) posted to the question.
LastViewedDate	Type date Properties Filter, Nillable, Sort, Update Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MostReportAbusesOnReply	Type int Properties Filter, Group, Nillable, Sort Description The most number of user-reported abuses on a Reply associated with the question. This field is available in API version 24.0 and later.
NumReplies	Type int Properties Filter, Group, Nillable, Sort Description The number of replies (child Reply object) that users have submitted for the question.

Field	Details
NumReportAbuses	Type int Properties Filter, Group, Nillable, Sort Description Represents the number of user-reported abuses on the question. This field is available in API version 24.0 and later.
NumSubscriptions	Type int Properties Filter, Group, Nillable, Sort Description Represents the number of users following the question. This field is available in API version 24.0 and later.
Origin	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The source of the question, such as <code>Chatter Answers</code>. This field is available in API version 24.0 and later.
Title	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The descriptive title of the question.
UpVotes	Type int Properties Filter, Group, Nillable, Sort Description The total number of up votes for the question.
VoteScore	Type double

Field	Details
	Properties Filter, Nillable, Sort
	Description The internal score of the question, used to sort questions and articles on the Popular tab in the application user interface. The internal algorithm that determines the score gives older votes less weight than newer votes, simulating exponential decay. The score itself doesn't display in the application user interface.
	 Note: Unlike other fields of type double, you can't use a SOQL aggregate function with this field.

Usage

Use this object to track questions in a zone.

QuestionDataCategorySelection

A data category selection represents a data category that classifies a question.

This object can be used to associate a question with a data category from a data category group or to query the categorization for a question.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

To create, read or update data category selection, you must have create, read or update permission on the categorized question. Users who can update question can also delete its category selection. Users who can create questions can only select categories visible to their role.

Fields

Field Name	Details
DataCategoryGroupName	Type DataCategoryGroupReference
	Properties Create
	Description Unique name of the data category group which has a category associated with the question.

Field Name	Details
DataCategoryName	Type DataCategoryGroupReference Properties Create Description Unique name of the data category associated with the question.
ParentId	Type reference Properties Create, Filter Description ID of the question associated with the data category selection.

Usage

Every question can be categorized in a data category. You can use the QuestionDataCategorySelection object to query and manage question categorization. Client applications can create categorization for a question. They can also delete, query, and retrieve question categorization.



Warning: Even though the API lets you select more than one category for QuestionDataCategorySelection, the Answers tab only supports one data category selection for questions. Selecting multiple categories through QuestionDataCategorySelection may result in unexpected behavior in the Answers tab, such as losing your multiple selections. You should only select one data category when using QuestionDataCategorySelection.

Sample Code—Java

In the following example, the `selectCategory` method adds a category to a question data category selection. The `retrieveCategorySelections` method returns all the categories from a question data category selection.

```
public void selectCategory(ID parentId, String categoryGroupName, String categoryName) {
    try {
        QuestionDataCategorySelection categorySelection = new
QuestionDataCategorySelection();

        categorySelection.setParentId(parentId);
        categorySelection.setDataCategoryGroupName(categoryGroupName);
        categorySelection.setDataCategoryName(categoryName);
        binding.create(new SObject[] {categorySelection});
    } catch (RemoteException e) {
        System.out.println("An unexpected error has occurred." + e.getMessage());
    }
}

public String[] retrieveCategorySelections(String parentId) {
    QueryResult qr = null;
```

```
try {
    qr = binding.query("SELECT DataCategoryName FROM QuestionDataCategorySelection
WHERE Id = '" + parentId + "'");
} catch (RemoteException e) {
    System.out.println("An unexpected error has occurred." + e.getMessage());
}

String[] categoryNames = new String[qr.getRecords().length];
for (int index = 0; index < qr.getRecords().length; index++) {
    categoryNames[index] =
((QuestionDataCategorySelection)qr.getRecords()[index]).getDataCategoryName();
}

return categoryNames;
}
```

Salesforce Knowledge uses a similar object for article data category selection. See [Article Type __DataCategorySelection](#) [__DataCategorySelection](#) for SOQL examples using this object.

SEE ALSO:
[Article Type __DataCategorySelection](#) [__DataCategorySelection](#)

QuestionReportAbuse

Represents a user-reported abuse on a Question in a Chatter Answers zone. This object is available in API version 24.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the Question from which the user reported abuse.
QuestionId	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description The ID of the Question from which the user reported abuse.
Reason	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The reason the user reported abuse on the Question, such as Spam, Hateful, or Inappropriate.

Usage

Use this object to track user-reported abuse on questions created in a Chatter Answers zone.

QuestionSubscription

Represents a subscription for a user following a Question. This object is available in API version 24.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
CommunityId	Type reference Properties Filter, Group, Nillable, Sort Description Required. ID of the zone associated with the Question the user is following. This field can't be updated.
Name	Type string Properties Autonumber, Defaulted on create, Filter, Sort

Field	Details
	Description The name of the question subscription.
QuestionCreatedDate	Type dateTime Properties Filter, Nillable, Sort Description Required. Creation date of the Question which the user is following. This field can't be updated.
QuestionId	Type reference Properties Create, Filter, Group, Sort, Update Description Required. ID of the Question which the user is following. This field can't be updated.
SubscriberId	Type reference Properties Create, Filter, Group, Sort, Update Description Required. ID of the User who is following the Question. This field can't be updated.

Usage

Things to consider when following a Question:

- A user can only follow questions that they have permission to view.
- Administrators and users with the “Modify All Data” permission can configure other users to follow questions that the other user has read access to.
- Administrators and users with the “Modify All Data” permission can configure users to stop following questions.

Queries on QuestionSubscription:

- Users with the “Read” permission on Question can see which questions other users are following.
- A query must include a LIMIT clause and the limit can't exceed 1,000.
- A query using a WHERE clause can only filter by fields on Question.

QueueSubject

Represents the mapping between a queue Group and the types associated with the queue, including custom objects.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

As of Summer '20 and later, only authenticated internal and external users can access this object.

A queue is a Group whose `Type` is `Queue`. To create a Group, you must have the Manage Users permission.

Fields

Field	Details
<code>QueueId</code>	Type reference Properties Create, Filter, Group, Sort Description The ID of a queue. This field is a relationship field. Relationship Name Queue Relationship Type Lookup Refers To Group
<code>SubjectType</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description A list of object types that can be associated with the queue specified by the <code>QueueId</code>.

Usage

Use this object to associate a queue with the `sObject` that can be associated with the queue, including custom objects.



Warning: You can't update or insert more than 18 queues at once when using the Bulk API.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

QuickText

This object stores a snippet of text that allows users to send a quick response to a customer. Use quick text to create greetings, answers to common questions, short notes, and more. This object is available in API version 24.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
Category	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description A customizable picklist that can be used to group multiple related quick text records together
Channel	Type multipicklist Properties Create, Defaulted on create, Filter, Nillable, Update Description A multi-select picklist that can be used to specify where specific quick text messages are available, such as in Chat or in the Email publisher in Case Feed.
FolderId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Returns the ID of the folder that contains the quick text. Available in API version 44.0 and later. This is a relationship field. Relationship Name Folder Relationship Type Lookup

Field Name	Details
	Refers To Folder
FolderName	Type string Properties Filter, Nillable, Sort Description Name of the folder that contains the quick text. Available in API version 44.0 and later.
IsInsertable	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If <code>true</code> , the quick text is available in the channels selected in the <code>Channel</code> field. If <code>false</code> , the quick text is not available. The label in the UI is Include in selected channels . By default: • This field is set to <code>true</code> on quick text records created from the Quick Text page or via the API. • This field is set to <code>false</code> on quick text records created during the Einstein Reply Recommendations reply publishing process.
LastReferencedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp when the current user last interacted with this record, directly or indirectly.
LastViewedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (<code>LastReferencedDate</code>), but not viewed it.

Field Name	Details
Message	Type textarea Properties Create, Filter (unavailable in API version 25.0 and later), Sort (unavailable in API version 25.0 and later), Update Description The content of the quick text record
Name	Type string Properties Create, Filter (unavailable in API version 25.0 and later), Group, idLookup, Sort (unavailable in API version 25.0 and later), Update Description A descriptive label for the quick text record
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the User or Queue that owns the quick text record This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
SourceType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description (Used with Einstein Reply Recommendations.) Indicates how the text was composed. This field is not available in the UI. Possible values are: • <code>EINSTEIN_GENERATED</code>—Text was generated by Einstein Reply Recommendations

Field Name	Details
	• <code>USER_EDITED</code>—Text was generated by Einstein Reply Recommendations, and then edited by a user • <code>USER_GENERATED</code>—User wrote the text

Usage

Use this object to create and manage the quick text messages available to users. You can categorize multiple quick text records into groups using the `Category` field. The `Category` field can also be a parent to multiple custom-dependent Picklist fields to create a hierarchical structure of categories.

QuickText is also used in Einstein Reply Recommendations, a feature that recommends stock replies for support agents to use in chats in the Lightning Service Console. During setup, Einstein Reply Recommendations scans past chats to generate a list of commonly used replies. Each generated reply is a `ReplyText` record. The admin then publishes, or converts, the replies to quick text, creating a corresponding QuickText record for each reply. Therefore, certain QuickText fields are used only on quick text records that originated as a `ReplyText` record.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

QuickTextChangeEvent (API version 48.0)

Change events are available for the object.

QuickTextHistory

History is available for tracked fields of the object.

QuickTextOwnerSharingRule

Sharing rules are available for the object.

QuickTextShare

Sharing is available for the object.

QuickTextUsage

Represents the usage of quick text on a record, including which quick text was used, who used it, and how they used it. Quick text is a snippet of text that allows users to send a quick response to a customer. This object is available in API version 47.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is always read-only.

Fields

Field	Details
AppContext	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Context in which the quick text was used. Possible values are: • Aloha—Salesforce Classic • Lightning—Lightning Experience • Unknown
Channel	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The channel in which the quick text was used. Possible values are: • Email • Event • Generic • Internal • Knowledge • Live Agent • Messaging • Phone • Portal • Social • Task
FolderId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the folder containing the quick text at the time it was used. This is a relationship field. Relationship Name Folder

Field	Details
	Relationship Type Lookup
	Refers To Folder
LaunchSource	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description How the user started the quick text. Possible values are: - Floater - Keyboard shortcut - Macro - Toolbar
LoggedTime	Type dateTime
	Properties Filter, Nillable, Sort
	Description The time when the quick text was used.
Name	Type string
	Properties Filter, Group, idLookup, Sort
	Description Name of the quick text.
OwnerId	Type reference
	Properties Filter, Group, Sort
	Description ID of the group or user that owns the quick text. This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup

Field	Details
	Refers To Group, User
QuickTextID	Type reference Properties Filter, Group, Sort Description ID of the quick text. This is a relationship field. Relationship Name QuickText Relationship Type Lookup Refers To QuickText
UserId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the user that used the quick text. This is a relationship field. Relationship Name User Relationship Type Lookup Refers To User

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[QuickTextUsageChangeEvent](#) (API version 62.0)

Change events are available for the object.

[QuickTextUsageOwnerSharingRule](#)

Sharing rules are available for the object.

[QuickTextUsageShare](#)

Sharing is available for the object.

Quote

Represents a quote, which is a record showing proposed prices for products and services. Available in API version 18.0 and later.

Quotes can be created from and synced with opportunities, and emailed as PDFs to customers

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AccountId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the account that's associated with the quote.
AdditionalAddress	Type address Properties Filter, Nillable Description Compound form of the additional address. Read-only. See Address Compound Fields for details on compound address fields.
AdditionalCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description City for the quote's additional address. Up to 40 characters allowed.
AdditionalCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Country for the quote's additional address. Up to 80 characters allowed.

Field	Details
AdditionalCountryCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description ISO country code for the quote's additional address.
AdditionalLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>AdditionalLongitude</code> to specify the precise geolocation of an additional address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places.
AdditionalLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>AdditionalLatitude</code> to specify the precise geolocation of an additional address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places.
AdditionalName	Type string Properties Filter, Group, Nillable, Sort Description Name associated with the quote's additional address. Limited: 255 characters.
AdditionalPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Postal Code for the quote's additional address.
AdditionalState	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description State for the quote's additional address. Up to 80 characters allowed.
AdditionalStateCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description ISO state code for the quote's additional address.
AdditionalStreet	Type textarea Properties Create, Filter, Nillable, Group, Sort, Update Description Street name for the quote's additional address.
BillToContactId	Type reference Properties Create, Filter, Nillable, Group, Sort, Update Description ID of the contact that the order is billed to. This field is available in API version 56.0 and later. This field is available with Subscription Management.
BillingAddress	Type address Properties Filter, Nillable Description Compound form of the billing address. Read-only. See Address Compound Fields for details on compound address fields.
BillingCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description City for the quote's billing address. Up to 40 characters allowed.

Field	Details
BillingCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Country for the quote's billing address. Up to 80 characters allowed.
BillingCountryCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description ISO country code for the quote's billing address.
BillingLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>BillingLongitude</code> to specify the precise geolocation of a billing address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places.
BillingLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>BillingLatitude</code> to specify the precise geolocation of a billing address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places.
BillingName	Type string Properties Filter, Group, Nillable, Sort Description Entity that the quote is billed to.
BillingPostalCode	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Postal Code for the quote's billing address.
BillingState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description State for the quote's billing address. Up to 80 characters allowed.
BillingStateCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description ISO state code for the quote's billing address.
BillingStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Street name for the quote's billing address.
CalculationStatus	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Price calculations are performed by Salesforce. Tax calculations are performed by a third-party tax provider integration with Salesforce. Both of these calculations are asynchronous, and you can use this field to see the status of the asynchronous processes. This field is available with Subscription Management or Revenue Cloud. Possible values are: - CompletedWithPricing—Indicates that pricing is complete and tax will now be calculated. - CompletedWithTax—Indicates that pricing and tax calculation are complete.

Field	Details
	- CompletedWithoutPricing—Indicates that pricing and tax calculation were skipped. - ConfigurationFailed—Indicates that configuration failed. Available in API version 62.0 - ConfigurationInProgress—Indicates that the configuration is in progress. Available in API version 62.0 - GroupRampConfigurationFailed—Indicates that the checks for group ramps have failed. Available in API version 65.0 and later. - NotStarted - PriceCalculationFailed—Indicates that pricing failed. Available in API version 58.0 and later. - PriceCalculationInProgress—Available in API version 58.0 and later. - PriceCalculationQueued—The request is sent to the asynchronous price calculation process, but the process hasn't started. Available in API version 58.0 and later. - QuoteRequestFailed—Indicates that the requested quote changes weren't saved. Available in API version 62.0 - QuoteRequestPartiallySaved—Indicates that the requested quote changes were partially saved. Available in API version 62.0 - ReconciliationFailed—Indicates that the arrangement of quote data failed. Available in API version 62.0 - ReconciliationInProgress—Indicates that the arrangement of data is in progress. For a sales rep, this value appears as Saving on the quote page. Available in API version 62.0 - SaveFailedOrIncomplete—Some or all of the records couldn't be saved. For example, some of the quote line item records weren't saved. Available in API version 58.0 and later. - Saving - TaxCalculationFailed - TaxCalculationInProgress - TaxCalculationSuccess—Available in API versions 56.0 and 57.0 - TaxCalculationWaiting The default value is NotStarted.
CanCreateQuoteLineItems	Type boolean Properties Create, Defaulted on create, Group Description This field isn't used.

Field	Details
ContactId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the contact that's associated with the quote.
ContractId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the contract that's associated with the quote.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Restricted picklist Description Available only for organizations with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization. If the organization has multicurrency and a <code>Pricebook2Id</code> specified on the quote, then the currency value of this field must match the currency of the PricebookEntry objects that are associated with any quote line items it has. This value is copied from the related Opportunity and can't be changed.
Description	Type textarea Properties Nillable Description Text description of the quote. Limit: 32,000 characters.
Discount	Type percent Properties Filter, Nillable, Sort Description The difference between the QuoteLineItem record's subtotal and its discounted total, divided by the QuoteLineItem's subtotal. Expressed as a percentage.

Field	Details
Email	Type email Properties Filter, Group, Nillable, Sort Description The email address of the contact who's associated with the quote.
ExpirationDate	Type date Properties Create, Filter, Nillable, Update Description The date when this quote is no longer valid.
Fax	Type phone Properties Create, Filter, Nillable, Update Description The fax number for the contact who's associated with the quote.
GrandTotal	Type currency Properties Filter, Nillable Description The total price of the quote plus shipping and taxes.  Note: The <code>GrandTotal</code> is a system-calculated summary field and is not directly referenceable or usable in custom formula fields on the Quote object. Attempts to do so result in an error message. For example, "Error: Field GrandTotal does not exist. Check spelling." To perform calculations based on the total value of a quote, consider using a Roll-Up Summary field from related Quote Line Items or performing calculations directly on the QuoteLineItem on page 4572 object.
IsSyncing	Type boolean Properties Defaulted on create, Filter Description Indicates whether the quote is syncing with an opportunity.

Field	Details
LastReferencedDate	Type date Properties Filter, Nillable, Sort, Update Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type date Properties Filter, Nillable, Sort, Update Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view but not viewed it directly.
LineItemCount	Type int Properties Filter, Nillable Description The number of line items on the quote.
Name	Type string Properties Create, Filter, idLookup, Update Description Required. Name for the quote. Limit: 225 characters.
OpportunityId	Type reference Properties Create, Filter Description ID for the opportunity associated with the quote.
Phone	Type phone Properties Create, Filter, Nillable, Update

Field	Details
	Description The phone number of the contact who's associated with the quote.
Pricebook2Id	Type reference Properties Create, Filter, Nillable, Update Description ID of the price book associated with the quote.
QuoteAccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the account associated with the quote. This field is available in API version 58.0 and later only when the Create Quotes Without a Related Opportunity setting on the Quotes Settings page is enabled. This field is a relationship field. Relationship Name QuoteAccount Refers To Account
QuoteNumber	Type string Properties Defaulted on create, Filter Description A system-generated number that identifies the quote.
QuoteToAddress	Type address Properties Filter, Nillable Description Compound form of the quote to address. Read-only. See Address Compound Fields for details on compound address fields.
QuoteToCity	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description City for the address to send the quote to for approval, such as a third party-agency representing a buyer. Up to 40 characters allowed.
QuoteToCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Country for the address to send the quote to for approval. Up to 80 characters allowed.
QuoteToLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>QuoteToLongitude</code> to specify the precise geolocation of a quote to address. Acceptable values are numbers between -90 and 90 with up to 15 decimal places.
QuoteToLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>QuoteToLatitude</code> to specify the precise geolocation of a quote to address. Acceptable values are numbers between -180 and 180 with up to 15 decimal places.
QuoteToName	Type string Properties Create, Filter, Nillable, Update Description The name of the entity (such as a person or business) that the quote is sent to for approval. Limit: 255 characters.
QuoteToPostalCode	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Postal code for the address to send the quote to for approval.
QuoteToState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description State for the address to send the quote to for approval. Up to 80 characters allowed.
QuoteToStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Street name for the address to send the quote to for approval.
RecordSource	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Specifies the source application context for the record. This field is available with Digital Insurance in API version 66.0 and later. Possible values are: • DigitalInsurance • Null
RecordTypeID	Type reference Properties Create, Filter, Nillable, Update Description ID of the record type assigned to the object.
RelatedWorkId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort Description Relationship field that's visible only if Field Service and Quotes are enabled in the Salesforce org. This field refers to the work order that the quote is created from. When a mobile worker creates a quote using the New Quote action in the Field Service mobile app, this field is automatically populated. This field is used in the related list that shows all of the quotes related to the work order.
ShippingAddress	Type address Properties Filter, Nillable Description Compound form of the shipping address. Read-only. See Address Compound Fields for details on compound address fields.
ShippingCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description City for the quote's shipping address. Up to 40 characters allowed.
ShippingCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Country for the quote's shipping address. Up to 80 characters allowed.
ShippingCountryCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description ISO country code for the quote's shipping address.
ShippingHandling	Type currency Properties Create, Filter, Nillable, Update

Field	Details
	Description The total shipping and handling costs for the quote.
ShippingLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>ShippingLongitude</code> to specify the precise geolocation of a shipping address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places.
ShippingLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>ShippingLatitude</code> to specify the precise geolocation of an address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places.
ShippingName	Type string Properties Create, Filter, Nillable, Update Description The name of the entity (such as a person or business) that the quote is sent to for approval.
ShippingPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Postal code for the quote's shipping address.
ShippingState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description State for the quote's shipping address. Up to 80 characters allowed.

Field	Details
ShippingStateCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description ISO state code for the quote's shipping address.
ShippingStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Street name for the quote's shipping address.
Status	Type picklist Properties Create, Defaulted on create, Filter, Nillable, Update Description The status of the quote. The standard options are: • —None— • Draft • Needs Review • In Review • Approved • Rejected • Presented • Accepted • Denied
Subtotal	Type currency Properties Filter, Nillable Description The sum of sales price multiplied by quantity for line items, not including the discount.
Tax	Type currency

Field	Details
	Properties Create, Filter, Nillable, Update Description The total taxes for the quote.
TotalPrice	Type currency Properties Filter, Nillable Description The total of the quote line items after discounts and before taxes and shipping.
TotalPriceWithTax	Type currency Properties Filter, Nillable, Sort Description The sum of TotalPrice and TotalTaxAmount. This field is available in API version 55.0 and later. This field is available if Subscription Management is enabled in your org.
TotalTaxAmount	Type currency Properties Filter, Nillable, Sort Description The total amount of all taxes. This field is available in API version 55.0 and later. This field is available if Subscription Management is enabled in your org. This field is a calculated field.

Usage

Use Quote to manage proposed product prices for customers. To update a Quote, your client application needs “Edit” permission.

- Client applications can create, update, delete, and query Attachment records associated with a quote via the API.
- You can sync a quote and its parent Opportunity.

Associated Objects

This object has the following associated objects. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

QuoteChangeEvent (API version 44.0)

Change events are available for the object.

QuoteFeed (API version 39.0)

Feed tracking is available for the object.

QuoteHistory (API version 57.0)

History is available for tracked fields of the object.

QuoteOwnerSharingRule (API version 41.0)

Sharing rules are available for the object.

QuoteShare (API version 41.0)

Sharing is available for the object.

SEE ALSO:

[QuoteLineItem](#)

[QuoteDocument](#)

[Opportunity](#)

QuoteAction

Indicates the type of sales transaction that's being quoted; for example, a renewal sale. This object is available in API version 59.0 and later.

If a quote doesn't have a quote action, Salesforce treats it as a quote of the `Add` type. When such a quote is used to create an order, Salesforce automatically creates an order action of the `Add` type.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available in orgs with Revenue Cloud. It's also available in Industries Automotive and Industries Field Service.

Fields

Field	Details
CurrencyIsoCode	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description ISO code of the currency. Use only one of the valid alphabetic, three-letter currency ISO codes defined by the ISO 4217 standard, such as <code>USD</code>, <code>GBP</code>, or <code>JPY</code>. Must be unique within your organization. Label is Currency ISO Code. The default value is <code>USD</code>. See Supported Currencies (ICU) for a list of currency codes Salesforce supports. This field is available in Revenue Cloud in API version 66.0 and later.
<code>LastReferencedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
<code>LastViewedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user accessed this record or list view indirectly, but didn't view it.
<code>Name</code>	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name given to the quote action.
<code>QuoteId</code>	Type reference Properties Create, Filter, Group, Sort Description The quote related to this quote action. This field is a relationship field. Relationship Name Quote

Field	Details
	Relationship Type Lookup Refers To Quote
SourceAssetId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The asset changed by this sales transaction. For example, if the quote action is a quantity amendment, this field contains the ID of the asset that's amended. This field is a relationship field. Relationship Name SourceAsset Relationship Type Lookup Refers To Asset
Subtype	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The subtype of the action on the quote line item. Valid values are: • DowngradeFrom—Available in API version 66.0 and later. • DowngradeTo—Available in API version 66.0 and later. • FieldAmendment • Rollback • StartDateAdjustment • SwapIn—Available in API version 66.0 and later. • SwapOut—Available in API version 66.0 and later. • TransferFrom • TransferTo • UpgradeFrom—Available in API version 66.0 and later. • UpgradeTo—Available in API version 66.0 and later. This field is available with Revenue Cloud in API version 64.0 and later.

Field	Details
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The type of sales transaction that the related quote is for. Valid values are: • Add • Amend • Association—Available in API version 66.0 and later. • Cancel • No Change • Renew • Transfer—Available with Revenue Cloud in API version 65.0 and later.

QuoteAdjustmentGroup

Group containing a set of adjustments applied to a quote. This object is available in API version 58.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is available with Subscription Management.

Fields

Field	Details
AdjustmentSource	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Indicates the origin of the price adjustment. Possible values are: • Discretionary—The adjustment is entered manually; for example, by a sales rep.

Field	Details
	Promotion—The adjustment is part of a promotion; for example, a holiday sale discount. Rule—The adjustment is due to a price rule. System—The adjustment originates from the system, for example, a volume discount.
AdjustmentType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Indicates the type of mathematical adjustment to be applied to the quote. Possible values are: AdjustmentAmount—The adjustment is a numerical amount, for example, a cash discount of 20. AdjustmentPercentage—The adjustment is a percentage amount, for example, a 10% discount. OverrideAmount—The adjustment is a manual price override. Available in API version 59.0 and later.
AdjustmentValue	Type double Properties Filter, Sort Description The specified AdjustmentType amount that is applied to the quote. For example, when AdjustmentType is AdjustmentAmount, AdjustmentValue is the cash amount of the price adjustment. When AdjustmentType value is AdjustmentPercentage, AdjustmentValue is the percent value of the price adjustment. When AdjustmentType is OverrideAmount, AdjustmentValue overrides the total amount of the quote.
Description	Type textarea Properties Nillable Description User-entered information about the quote adjustment group.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort

Field	Details
	Description The user-defined name of the quote adjustment group.
Priority	Type int Properties Filter, Group, Nillable, Sort Description A numeric value that represents the order of precedence of the quote adjustment group. It can also represent the order of precedence when applying the <code>AdjustmentType</code> values. For example, a quote can have two adjustments: a \$100 discount and a 10% discount. This field indicates which adjustment to apply first.
QuoteId	Type reference Properties Filter, Group, Sort Description The ID of the quote related to the adjustments in this group. This field is a relationship field. Relationship Name Quote Relationship Type Lookup Refers To Quote
TotalAmount	Type currency Properties Filter, Sort Description The total of all quote adjustments in this quote adjustment group, excluding tax.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[QuoteAdjustmentGroupChangeEvent](#) on page 68

Change events are available for the object.

QuoteAdjustmentGroupFeed on page 55

Feed tracking is available for the object.

QuoteAdjustmentGroupHistory on page 63

History is available for tracked fields of the object.

QuoteAdjustmentGroupOwnerSharingRule on page 65

Sharing rules are available for the object.

QuoteAdjustmentGroupShare on page 67

Sharing is available for the object.

QuoteDocument

Represents a quote in document format. Available in API version 18.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ContentVersionDocumentId	Type reference Properties Create, Filter, Group, Sort Description ID for the document's version.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Restricted picklist Description Available only for organizations with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization. If the organization has multicurrency and a <code>Pricebook2Id</code> specified on the quote, then the currency value of this field must match the currency of the <code>PricebookEntry</code> objects that are associated with any quote line items it has.
Discount	Type percent

Field	Details
	Properties Filter, Nillable, Sort Description The discount for the quote used in the document.
Document	Type base64 Properties Create, Nillable Description The binary data of the document stored in the QuoteDocument object.
DocumentTemplate	Type string Properties Create, Filter, Group, Nillable, Sort Description The ID of the template used to generate the document.
GrandTotal	Type currency Properties Filter, Nillable, Sort Description Grand total for the quote used in the document.
Name	Type string Properties Filter, idLookup, Sort Description Name of the quote document.
QuoteId	Type reference Properties Create, Filter, GroupSort Description ID for the quote used for the document.
Status	Type picklist

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The status of the document. Possible values are: - Completed - Failed - Generating - In Progress - None - Queued The default value is <code>None</code>.

Usage

Use the QuoteDocument object to store a document that can be used to present the quote information to the customer.

SEE ALSO:

- [Quote](#)
- [QuoteLineItem](#)

QuoteLineGroup

Stores the group information for line items in a quote. It also stores the aggregated line field information (subtotal). It contains a parent-child relationship to quote. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Fields

Field	Details
Description	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the group.
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Reserved for future use.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the group.
QuoteId	Type reference Properties Create, Filter, Group, Sort Description The quote associated with the group. This field is a relationship field. Relationship Name Quote Relationship Type Master-detail Refers To Quote (the master object)
SortOrder	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Number indicating the sort order selected by the user.

Field	Details
StartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Reserved for future use.
SummarySubtotal	Type currency Properties Create, Filter, Nillable, Sort, Update Description The total amount of all the line items in the group.
Type	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of the group. Possible values are: CPQQuoteGroup—CPQ Line Grouping The default value is CPQQuoteGroup.

QuoteLineItem

Represents a quote line item, which is a member of the list of Product2 products associated with a quote, along with other information about those line items on that quote. Available in API version 18.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The user must have “Edit” permissions on quote records to create or update quote line items on a quote. The user must have “Edit” permissions on quote records to delete a quote line item.

Some of the fields are available when you turn on Subscription Management.

Fields

Field	Details
BatchIdentifier	Type string Properties Filter, Group, Nillable, Sort Description Identifier for a product bundle in a transaction processing batch. This value makes sure that quote lines from the same bundles process together.
BillingFrequency	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The time period that indicates how often the quote line item is billed. This field is available in API version 55.0 and later. This field is available when Subscription Management is enabled. Possible values are: • Annual • Monthly
BillingReference	Type string Properties Create, Filter, Group, Nillable, Sort Description Reference to the original quote for which this quote line item is created. This field is available in API version 61.0 and later.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Available only for organizations enabled for multiple currencies. Contains the ISO code for any currency allowed by the organization. If the organization has multicurrency and a Pricebook2 specified on the quote (the <code>Pricebook2Id</code> field isn't blank), then the currency value of this field must match the currency of the PricebookEntry objects for any associated quote line items. This value comes from the related quote and can't be changed.

Field	Details
CustomProductName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Custom product name for the quote line item.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Text description of the line item. Limit: 225 characters.
Discount	Type percent Properties Create, Filter, Nillable, Sort, Update Description The optional discount percentage, specified by the sales representative at the line level. Editable number from 0 to 100.
DiscountAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description The fixed amount discount to apply to the quote line item. Available in API version 59.0 and later.
DoesAutomaticallyRenew	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates that the quote line item is set to automatically renew (True) or not (False). The default value is <code>false</code>.
Division	Type picklist

Field	Details
	Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description A logical segment of your organization's data. For example, if your company is organized into different business units, you could create a division for each business unit, such as "North America," "Healthcare," or "Consulting." Available only if the organization has the Division permission enabled.
EffectiveGrantDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date on which the resources associated with the quote line item are granted.
EndDate	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description If the quote line item is sold on subscription, this field indicates the date on which the subscription ends. This field is available in API version 55.0 and later. This field is available if Subscription Management is enabled in your org. You can indicate a subscription's length by using either <code>StartDate</code> and <code>EndDate</code>, or by using <code>StartDate</code> and <code>SubscriptionTerm</code>. If you provide a value for both <code>EndDate</code> and <code>SubscriptionTerm</code>, <code>EndDate</code> is used to determine the subscription's length.
EndTime	Type dateTime Properties Filter, Nillable, Sort Description The end date and time of the quote line item, which is derived from the End Date and End Time fields in the time zone specified in the Start and End Time Zone field. If the time zone isn't specified, the default is Coordinated Universal Time (UTC). This field is available in Revenue Cloud in API version 65.0 and later.
EndQuantity	Type double Properties Filter, Nillable, Sort

Field	Details
	Description If the quote line item is sold on a subscription, this field indicates the end quantity when the subscription ends. This field is available in API version 60.0 and later. This field is available with Subscription Management.
EndTime	Type time Properties Create, Filter, Nillable, Sort, Update Description The end time of the quote line item. This field is available in Revenue Cloud in API version 65.0 and later.
HasQuantitySchedule	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Read-only. Indicates whether the opportunity line item that the quote line item is synced with has a quantity schedule.
HasRevenueSchedule	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Read-only. Indicates whether the opportunity line item that the quote line item is synced with has a revenue schedule. If this object has a revenue schedule, the <code>GrandTotal</code> and <code>TotalPrice</code> fields can't be updated. In addition, the <code>Quantity</code> field can't be updated if this object has a quantity schedule. The system ignores any attempt to update this field. The update isn't rejected but the updated value is ignored.
HasSchedule	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Read-only. Indicates whether the line item uses schedules.
IsPrimarySegment	Type boolean

Field	Details
	Properties Filter, Group, Sort Description Indicates whether the segment for the quote line item is a primary segment (true) or not (false). The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user only accessed this record or list view (LastReferencedDate) but not viewed it.
LegalEntityId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the legal entity record associated with the quote line item. This field is a relationship field. Relationship Name LegalEntity Refers To LegalEntity
LineNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort

Field	Details
	Description Read-only. An automatically generated number identifying the quote line item. In the form of QL-XXXXX.
ListPrice	Type currency Properties Filter, Nillable, Sort Description Read-only. Corresponds to the UnitPrice on the PricebookEntry that is associated with this line item, which can be in the standard price book or a custom price book. A client app can use this information to show whether the unit price (or sales price) of the line item differs from the price book entry list price.
ListPriceTotal	Type currency Properties Filter, Nillable, Sort Description The ListPrice times the Quantity. This field is a calculated field.
Margin	Type percent Properties Create, Filter, Nillable, Sort, Update Description The optional margin percentage, specified by the sales representative at the line item level. This field is available in Revenue Cloud in API version 65.0 and later.
MarginAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description The optional margin amount, specified by the sales representative at the line item level. This field is available in Revenue Cloud in API version 65.0 and later.
NetTotalPrice	Type currency Properties Filter, Nillable, Sort

Field	Details
	Description The price after all adjustments, inclusive of quantity, prorated for the duration of the subscription. This field is a calculated field equal to <code>TotalAdjustmentAmount</code> plus <code>TotalLineAmount</code>. This field is available in API version 56.0 and later. This field is available with Subscription Management.
NetUnitPrice	Type currency Properties Filter, Nillable, Sort Description The unit price after all price adjustments are applied.
OpportunityLineItemId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the related opportunity line item. This field is populated by the API during creation of the quote line item. Not editable. Available in API version 40.0 and later.
ParentQuoteLineItemId	Type reference Properties Filter, Group, Nillable, Sort Description The unique identifier of the related line item in the parent quote. This field is populated by the API during creation of the quote line item. This field is available in version 58.0 and later. This field is available when Subscription Management is enabled. This field is a relationship field. Relationship Name ParentQuoteLineItem Relationship Type Lookup Refers To QuoteLineItem
PartnerDiscountPercent	Type percent

Field	Details
	Properties Create, Filter, Nillable, Sort, Update Description The partner's discount percent applied to the quote lines. Available in API version 59.0 and later.
PartnerUnitPrice	Type currency Properties Create, Filter, Nillable, Sort, Update Description The unit price after applying the discount given to the partner for the quote line item. Available in API version 59.0 and later.
PeriodBoundary	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The period boundary helps determine the start and end date of the billing periods. This field is available in API version 55.0 and later. This field is available with Subscription Management and Revenue Cloud. Possible values are: • AlignToCalendar—the period starts on the first day of the term unit; for example, the first day of the month. • Anniversary—The start date determines the boundary. For example, if a monthly subscription starts on September 13, the subscription starts on the 13th day of each month. • DayOfPeriod—the period starts on the day indicated by <code>PeriodBoundaryDay</code>. • LastDayOfPeriod—the period starts on the last day of the pricing term unit. Keep these considerations in mind for amendment, renewal, and cancellations of assets in Revenue Cloud. • The value of the <code>PeriodBoundary</code> field is copied from the <code>AssetActionSource</code> (initial sale), by default. • For termed selling models where the <code>PeriodBoundary</code> value is <code>Anniversary</code>, the value of the <code>PeriodBoundary</code> field is automatically converted to <code>DayOfPeriod</code>. • Start date adjustment operation on an asset preserves the original value without conversion.

Field	Details
PeriodBoundaryDay	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Required when <code>PeriodBoundary</code> is <code>DayOfPeriod</code>. Indicates day of the week or month that marks the period boundary. Must be an integer from 1 through 31. This field is available in API version 55.0 and later. This field is available with Subscription Management and Revenue Cloud. Keep these considerations in mind for amendment, renewal, and cancellations of assets in Revenue Cloud. • The value of the <code>PeriodBoundary</code> field is copied from the <code>AssetActionSource</code> (initial sale), by default. • When <code>PeriodBoundary</code> field value is converted from <code>Anniversary</code> to <code>DayOfPeriod</code> for termed selling models, the value of the <code>PeriodBoundaryDay</code> field is automatically populated with the day value from <code>AssetActionSource.StartDate</code>. • Start date adjustment operation on an asset preserves the original value without conversion.
PeriodBoundaryStartMonth	Type picklist Properties Create, Filter, Group, Restricted picklist, Nillable, Sort, Update Description The field is populated based on input in the <code>StartDate</code>, <code>PeriodBoundary</code>, and <code>PeriodBoundaryDay</code> when <code>BillingFrequency</code> is <code>Annual</code> and <code>PricingTermUnit</code> is <code>Annual</code> or by manual user entry. Possible values are: • 1-January • 2-February • 3-March • 4-April • 5-May • 6-June • 7-July • 8-August • 9-September • 10-October • 11-November • 12-December

Field	Details
	Keep these considerations in mind for amendment, renewal, and cancellations of assets in Revenue Cloud. - The value of the <code>PeriodBoundary</code> field is copied from the <code>AssetActionSource</code> (initial sale), by default. - For termed selling models where <code>PeriodBoundary</code> field value is <code>Anniversary</code> and <code>PricingTermUnit</code> field value is <code>ANNUAL</code>, <code>SEMI_ANNUAL</code>, or <code>QUARTERLY</code>, the value of the <code>PeriodBoundaryStartMonth</code> field is automatically recalculated by using <code>AssetActionSource.StartDate.month</code>. - Start date adjustment operation on an asset preserves the original value without conversion.
<code>PricebookEntryId</code>	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the associated PricebookEntry. Exists only for orgs with Products enabled. In API 38.0 and earlier, if <code>Product2Id</code> is populated with <code>PricebookEntryId</code> data, you receive an error message. In API 39.0 and later, <code>Product2Id</code> is nulled, and <code>PricebookEntryId</code> is populated with the <code>PricebookEntryId</code> data.
<code>PriceRevisionPolicyId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The price uplift policy associated with this quote line item. This field is a relationship field. Relationship Name PriceRevisionPolicy Refers To PriceRevisionPolicy Label is Price Revision Policy. This field is available in Revenue Cloud in API version 65.0 and later.
<code>PricingContractId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The contract used for pricing that's associated with the quote line item.

Field	Details
	This field is a relationship field. Relationship Name PricingContract Refers To Contract
PriceWaterfallIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The price waterfall identifier generated by Salesforce Pricing that's associated with the pricing of the detail record. Available in API version 60.0 and later.
PricingTerm	Type int Properties Filter, Group, Nillable, Sort Description The number of terms in the subscription. For example, if a monthly subscription is priced yearly, this field is 12. This field is available in API version 55.0 and later. This field is available with Subscription Management.
PricingTermCount	Type double Properties Filter, Nillable, Sort Description A calculated field indicating the number of pricing terms in the subscription. This field is available in API version 55.0 and later. This field is available with Subscription Management.
PricingTermUnit	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The unit of time for the pricing term. This field is available in API version 55.0 and later. This field is available with Subscription Management. Possible values are: • Annual—Available in API version 58.0 and later. UI label is Years.

Field	Details
	Months.
Product2Id	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the Product2 associated with this QuoteLineItem. In API 38.0 and earlier, if Product2Id is populated with PricebookEntryId data, you receive an error message. In API 39.0 and later, Product2Id is nulled, and PricebookEntryId is populated with the PricebookEntryId data.
ProductInstanceIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the product instance that's added to a quote. Each quote line item created for the same product instance has the same product instance identifier value.
ProductSellingModelId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the related product selling model. This field is available in API version 55.0 and later. This field is available with Subscription Management. This field is a relationship field. Relationship Name ProductSellingModel Relationship Type Lookup Refers To ProductSellingModel
ProrationPolicyId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the related proration policy. This field is available in API version 55.0 and later. This field is available with Subscription Management.

Field	Details
	This field is a relationship field. Relationship Name ProrationPolicy Relationship Type Lookup Refers To ProrationPolicy
Quantity	Type double Properties Create, Filter, Sort, Update Description Required. The number of units for the line item.
QuantityUnitOfMeasureId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The unit of measure for the quantity, start quantity, and end quantity. This field is a relationship field. Relationship Name QuantityUnitOfMeasure Refers To UnitOfMeasure
QuoteActionId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the related quote action. This field is available in API version 58.0 and later. This field is available with Subscription Management and Revenue Lifecycle Management. This field is a relationship field. Relationship Name QuoteAction Relationship Type Lookup Refers To QuoteAction

Field	Details
QuoteId	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the associated quote.
QuoteLineGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the quote line group for the quote line item. This field is a relationship field. Relationship Name QuoteLineGroup Refers To QuoteLineGroup
QuoteLineItemRecipientId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the recipient for the quote line item. This field is a relationship field. Relationship Name QuoteLineItemRecipient Refers To QuoteLineItemRecipient
RampIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ramp ID used to group quote line item segments.
RelatedQuoteLineItemId	Type reference

Field	Details
	Properties Filter, Group, Nillable, Sort Description The quote line item ID related to the order item created. This field is a relationship field. Relationship Name RelatedQuoteLineItem Refers To OrderItem This field is available in Revenue Cloud in API version 65.0 and later.
SegmentIdentifier	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The ID of the segment.
SegmentName	Type string Properties Filter, Group, Nillable, Sort Description The name of the quote line item segment.
SegmentType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The time period for the segment. Possible values are: • Custom • FreeTrial—Free Trial • Yearly The default value is Yearly.
SellingModelType	Type picklist

Field	Details
	Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Indicates whether the quote line item is sold as a one-time purchase, an evergreen subscription, or as a termed subscription. This field is available in API version 55.0 and later. This field is available with Subscription Management. Possible values are: • Evergreen • OneTime • TermDefined The default value is OneTime.
ServiceDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date when the product revenue is recognized and the product quantity is shipped.
SortOrder	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The value of where the line item is in the sorted order such as 1, 2, 3. The SortOrder value determines the order in which a quote line item appears in the Quote Line Items related list and the Quote PDF. Client apps can use this value to match the sort order in Salesforce. This field is only available in API versions 21.0 and greater.
StartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description If the quote line item is sold on subscription, this field indicates the date on which the subscription starts. This field is available in API version 55.0 and later. This field is available with Subscription Management.
StartDateTime	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The start date and time of the quote line item, which is derived from the Start Date and Start Time fields in the time zone specified in the Start and End Time Zone field. If the time zone isn't specified, the default is Coordinated Universal Time (UTC). This field is available in Revenue Cloud in API version 65.0 and later.
StartEndTimeZone	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The time zone for the quote line item's start and end dates, times, and datetimes. This field is available in Revenue Cloud in API version 65.0 and later.
StartTime	Type time Properties Create, Filter, Nillable, Sort, Update Description The start time of the quote line item. This field is available in Revenue Cloud in API version 65.0 and later.
StartQuantity	Type double Properties Create, Filter, Nillable, Sort Description If the quote line item is sold on a subscription, this field indicates the item quantity when the subscription starts. This field is available in API version 60.0 and later. This field is available with Subscription Management.
StartingPriceTotal	Type currency Properties Filter, Nillable, Sort Description The starting unit price times the quantity.
StartingUnitPriceSource	Type picklist

Field	Details
	Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates whether the starting unit price was entered manually or calculated. This field is available in API version 55.0 and later. This field is available with Subscription Management. Possible values are: - Manual - System - Inherited
Status	Type dynamic picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Represents the status of the quote line item. This field is available in API version 60.0 and later. The <code>QuoteLineItemStatus</code> permission is required to access this field. Possible values are: - In Progress - Pending - Approved - Rejected Default value is In Progress.
SubscriptionTerm	Type int Properties Filter, Group, Nillable, Restricted picklist, Sort Description The number of terms in the subscription. You can indicate a subscription's length by using either <code>StartDate</code> and <code>EndDate</code>, or by using <code>StartDate</code> and <code>SubscriptionTerm</code>. If you provide a value for both <code>EndDate</code> and <code>SubscriptionTerm</code>, <code>EndDate</code> is used and <code>SubscriptionTerm</code> is ignored.
SubscriptionTermUnit	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description The unit of time used to define the subscription. This field is available in API version 55.0 and later. This field is available with Subscription Management. Possible values are: • Annual—UI label is <code>Years</code> • Months
Subtotal	Type currency Properties Filter, Nillable, Sort Description The line item's <code>Quantity</code> multiplied by the <code>UnitPrice</code>. In Revenue Cloud, <code>Subtotal</code> is set to <code>TotalLineAmount</code> when <code>TotalLineAmount</code> has a value.
TotalAdjustment	Type percent Properties Filter, Nillable, Sort Description The total discount percentage applied at the line item level. This percentage is calculated by using the formula: $(\text{Total Line Amount} - \text{Net Total Price}) / \text{Total Line Amount}$. This field is available in Revenue Cloud in API version 65.0 and later.
TotalAdjustmentAmount	Type currency Properties Filter, Nillable, Sort Description The sum of the adjustments applied to the quote line item, inclusive of quantity, prorated for the duration of the subscription. This field is available in API version 56.0 and later. This field is available with Subscription Management.
TotalCost	Type currency Properties Filter, Nillable, Sort Description The total cost of all products sold in the quote, calculated by multiplying the quantity by the unit cost.

Field	Details
	This field is available in Revenue Cloud in API version 65.0 and later.
TotalLineAmount	Type currency Properties Filter, Nillable, Sort Description The total price of the quote line item, before price adjustments, inclusive of quantity, prorated for the duration of the subscription. This price is a calculated field equal to <code>ListPrice</code> times <code>Quantity</code> times <code>PricingTermCount</code>. This field is available in API version 56.0 and later. This field is available with Subscription Management.
TotalMargin	Type percent Properties Filter, Nillable, Sort Description The effective margin percentage at the line item level. This percentage is calculated by using the formula: $(\text{Net Total Price} - \text{Total Cost}) / \text{Net Total Price}$. This field is available in Revenue Cloud in API version 65.0 and later.
TotalMarginAmount	Type currency Properties Filter, Nillable, Sort Description The effective margin amount at the line item level. This amount is calculated by subtracting total cost from net total price. This field is available in Revenue Cloud in API version 65.0 and later.
TotalPrice	Type currency Properties Filter, Nillable, Sort Description Read-only. Calculated by applying the <code>Discount</code> to the <code>Subtotal</code>. This field is nillable, but you can't set both <code>TotalPrice</code> and to null in the same update. To insert the for a quote line item via the API (given only a unit price and the quantity), calculate this field as the unit price multiplied by the quantity. This field is read only if the quote line item has a revenue schedule.

Field	Details
UnitCost	Type currency Properties Create, Filter, Nillable, Sort, Update Description The unit cost of a product sold as part of the quote. This field is available in Revenue Cloud in API version 65.0 and later.
UnitPrice	Type currency Properties Create, Filter, Sort, Update Description Required. The price per unit for the quote line item.
UnitPriceUplift	Type percent Properties Create, Filter, Nillable, Sort, Update Description The percentage increase of the quote line item's unit price.
ValidationResult	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies whether the quote line item was configured and priced by Revenue Lifecycle Management. A quote can be activated only after all its quote line items are configured and priced by Revenue Lifecycle Management. Valid values are: • warning—Indicates that the quote line item wasn't configured and priced by Revenue Lifecycle Management. Available in API version 60.0 and later.
Visibility	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description Specifies how Salesforce shows a quote line item in the Transaction Line Editor and a quote document. Possible values are: • Always—Quote line items are always displayed in the Transaction Line Editor. • Never—Quote line items aren't displayed in the Transaction Line Editor or in the quote document. • Quote Document Only—Quote line items are displayed only in the quote document, but not in the Transaction Line Editor. • Transaction Line Editor Only—Quote line items are displayed only in the Transaction Line Editor, but not in the quote document. The default value is Always.

Usage

A quote record can have QuoteLineItem records only if the quote has a Pricebook2. A QuoteLineItem must correspond to a Product2 that is listed in the quote's Pricebook2.

 **Note:** If the multicurrency option is enabled, the `CurrencyIsoCode` field is present. It can't be modified, it's always set to the value of the `CurrencyIsoCode` of the parent quote.

Effects on Quotes

Quotes with related QuoteLineItem objects are affected in the following ways:

- Creating a QuoteLineItem increments the quote value by the `TotalPrice` of the QuoteLineItem.
- When you create or update a QuoteLineItem, the API verifies that the line item corresponds to a PricebookEntry in the Pricebook2 associated with the quote.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

QuoteLineItemChangeEvent (API version 44.0)

Change events are available for the object.

QuoteLineItemHistory (API version 57.0)

History is available for tracked fields of the object.

SEE ALSO:

[Quote](#)

[QuoteDocument](#)

[Opportunity](#)

QuoteLineItemRecipient

Represents a site, employee, or other entity for which services are being quoted. This could include details such as the recipient's name, contact information, associated site or location, and any specific requirements or preferences for the quoted services. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
BroadbandConnectionType	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the broadband connection that's available at the address.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MaxDownloadSpeed	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The maximum download speed available at the address.

Field	Details
MaxUploadSpeed	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The maximum upload speed available at the address.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the customer's site or location.
QuoteId	Type reference Properties Create, Filter, Group, Sort Description The quote associated with the recipient. This field is a relationship field. Relationship Name Quote Relationship Type Master-detail Refers To Quote (the master object)
RecipientType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the type of recipient of the service. Possible values are: • Location • Subscriber The default value is Location.

Field	Details
ServiceAddrValidationDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time when the address was validated.
Service Account	Type entityid Properties Create, Filter, Group, Nillable, Sort, Update Description Reference to the Account Entity where the product is used, serviced, or installed.
ServiceAddrValidationMsg	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The message sent after the validation of the address.
ServiceAddrValidationResult	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the status of the address validation. Possible values are: • Fail • Partial Success • Success The default value is Success.
ServiceAddress	Type address Properties Filter Description The address where the recipient receives the service.

Field	Details
ServiceCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The city where the recipient receives the service.
ServiceCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The country where the recipient receives the service.
ServiceGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the accuracy level of the geocoded address coordinates. Possible values are: • Address • Block • City • County • ExtendedZip—Extended Zip • NearAddress—Near Address • Neighborhood • State • Street • Unknown • Zip
ServiceLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description The latitude of the location where the recipient receives the service.

Field	Details
ServiceLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description The longitude of the location where the recipient receives the service.
ServicePostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The postal code of the address.
ServiceState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The state where the recipient receives the service.
ServiceStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The street where the recipient receives the service.
ServiceabilityCheckDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time when the serviceability check was done.
ServiceabilityData	Type textarea Properties Create, Nillable, Update

Field	Details
	Description The information about serviability, such as broadband connection, download, and upload speeds available at the address.
SiteName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the customer's site or location.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[QuoteLineItemRecipientHistory](#)

History is available for tracked fields of the object.

QuoteLinePriceAdjustment

Indicates the calculated price adjustment that is applied to the quote line, for example, a calculated volume discount or the prorated value of a manual discount. Use the quote line price adjustment to inform potential customers about the type, value, and total amount of their discounts. This object is available in API version 56.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is available with Subscription Management.

Fields

Field	Details
AdjustmentAmountScope	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description Used with <code>AdjustmentValue</code> to determine the amount of the adjustment. Possible values are: • <code>Total</code>—The adjustment applies to the line item's total and isn't multiplied by the quantity. The adjustment amount is prorated for the duration of the subscription. • <code>Unit</code>—The adjustment is multiplied by the line item's quantity, prorated for the duration of the subscription. • <code>UnproratedTotal</code>—The adjustment applies to the line item's total and isn't multiplied by the quantity. The adjustment amount isn't prorated for the duration of the subscription.
<code>AdjustmentSource</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The source of the adjustment. Possible values are: • <code>Discretionary</code>—The adjustment is entered manually; for example, by a sales rep. • <code>Promotion</code>—Reserved for future use. • <code>Rule</code>—The adjustment results from a system rule, such as a price rule or product rule. • <code>System</code>—The adjustment is determined by the pricing configuration for the product; for example, as part of a discount schedule.
<code>AdjustmentType</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of adjustment to apply to a quote line. Possible values are: • <code>AdjustmentAmount</code>—The adjustment is a numerical amount, for example, a cash discount of 20. • <code>AdjustmentPercentage</code>—The adjustment is a percentage amount, for example, a 10% discount. • <code>OverrideAmount</code>—The adjustment is a manual price override. Available in API version 59.0 and later.
<code>AdjustmentValue</code>	Type double

Field	Details
	Properties Filter, Sort Description The value of the adjustment. Used together with <code>AdjustmentAmountScope</code> to determine the amount of the adjustment.
AppliedPromotionDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time on which the promotion was applied to the asset.
CouponCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the coupon code that was applied.
Description	Type textarea Properties Nillable Description The system-entered description of the quote line price adjustment.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The system-entered name of the quote line price adjustment.
PriceAdjustmentCauseId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the record that caused the adjustment. Null if <code>AdjustmentSource</code> is <code>Discretionary</code> , indicating a manual adjustment.

Field	Details
	For example, if the price adjustment is due to a price adjustment tier, this field contains the ID of the <code>PriceAdjustmentTier</code> record. This field is a polymorphic relationship field. Relationship Name PriceAdjustmentCause Relationship Type Lookup Refers To PriceAdjustmentTier
Priority	Type int Properties Filter, Group, Nillable, Sort Description Reserved for future use.
QuoteAdjustmentGroupId	reference int Properties Filter, Group, Nillable, Sort Description The ID of the quote adjustment group, which totals all price adjustments for the quote. This field is a relationship field. Relationship Name QuoteAdjustmentGroup Relationship Type Lookup Refers To QuoteAdjustmentGroup
QuoteLineItemId	Type reference Properties Filter, Group, Sort Description The ID of the quote line item that this price adjustment applies to. This field is a relationship field. Relationship Name QuoteLineItem

Field	Details
	Relationship Type Lookup
	Refers To QuoteLineItem
TotalAmount	Type currency
	Properties Filter, Sort
	Description The total amount of the adjustment that applies to the quote line item, inclusive of quantity, prorated for the duration of the subscription.

QuoteLineRelationship

Describes the relationship between quote line items, such as items in a bundle. When you create a QuoteLineRelationship object, it's immutable: it can't be edited or removed. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available if Subscription Management or Revenue Cloud is enabled.

Fields

Field	Details
AssociatedQuantScaleMethod	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description How to scale the quantity of the associated quote line, relative to the main quote line. If this field has a non-null value, you can't edit the associated quote line's quantity. Possible values are: • Constant— The associated quote's line quantity remains the same in relation to the main quote line's quantity. For example, the main quote line has a quantity of one and

Field	Details
	the associated quote line has a quantity of one. If you increase the quantity of the main quote line to two, the associated quote line's quantity remains at one. Proportional— The associated order's item quantity increases or decreases based on the main quote line's quantity. For example, the main quote line has a quantity of one and the associated quote line has a quantity of two. If you increase the quantity of the main quote line to two, the associated quote line's quantity increases to four. The default value is Proportional.
AssociatedQuoteLineId	Type reference Properties Create, Filter, Group, Sort Description The unique identifier of the associated quote line item. This field is a relationship field. In a bundle relationship, this quote line is the bundle component. Relationship Name AssociatedQuoteLine Relationship Type Lookup Refers To QuoteLineItem
AssociatedQuoteLinePricing	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Indicates how the associated quote line item is priced relative to the main quote line item. Possible values are: IncludedInBundlePrice— The associated quote line's cost is \$0 because it's included in the bundle's price. NotIncludedInBundlePrice— The associated quote line has a cost because it's not included in the bundle's price.
AssociatedQuoteLineRole	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Describes the position of the associated quote line item in the relationship.

Field	Details
	Possible values are: • <code>BundleComponent</code>—The associated quote line item is part of a bundle. • <code>SetComponent</code>—The associated quote line item is part of a set.
<code>IsPriceInclusive</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether child products are included in the root bundle price. If set to <code>true</code>, the price of each child product is zero. The default value is <code>false</code>.
<code>LastReferencedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
<code>LastViewedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>), but not viewed it.
<code>MainQuoteLineId</code>	Type reference Properties Create, Filter, Group, Sort Description The unique identifier of the main quote line item. This field is a relationship field. In a bundle relationship, this quote line is the bundle parent. Relationship Name MainQuoteLine Relationship Type Lookup

Field	Details
	Refers To QuoteLineItem
MainQuoteLineRole	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Indicates the position of the main quote line item in the relationship. Possible values are: • Bundle—The main quote line item is the bundle parent. • Set—The main quote line item is the set parent.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the quote line relationship.
ProductRelatedComponentId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the product related component. This field is a relationship field. Relationship Name ProductRelatedComponent Refers To ProductRelatedComponent
ProductRelationshipTypeId	Type reference Properties Create, Filter, Group, Sort Description The unique identifier of record that describes the relationship between the main and associated quote lines. This field is a relationship field.

Field	Details
	Relationship Name ProductRelationshipType Relationship Type Lookup Refers To ProductRelationshipType
QuoteId	Type reference Properties Filter, Group, Nillable, Sort Description The unique identifier of the quote to which the main and associated quote lines belong. This field is a relationship field. Relationship Name Quote Relationship Type Lookup Refers To Quote
RootQuoteLineId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The root quote line for the quote line relationship. In a bundle relationship, the root quote line is the root bundle. This field is a relationship field. Relationship Name RootQuoteLine Refers To QuoteLineItem

Associated Objects

This object has the following associated objects.

[QuoteLineRelationshipFeed](#)

Feed tracking is available for the object.

QuoteLineRelationshipHistory

History is available for tracked fields of the object.

QuoteItemTaxItem

The tax that is applied to a quote line item. This object is available in API version 55.0 and later.

Supported Calls

```
create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), update(), upsert()
```

Special Access Rules

This object is available if Subscription Management is enabled in your org. This object is also available in Enterprise, Unlimited, and Developer Editions of Revenue Cloud.

Fields

Field	Details
Amount	Type currency Properties Filter, Sort Description The tax amount for the quote line item.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the org. Possible values are: - BHD—Bahraini Dinar - EUR—Euro - JPY—Japanese Yen - USD—U.S. Dollar The default value is 'USD'.

Field	Details
Description	Type textarea Properties Nillable Description User-defined description of the tax. For example, state sales tax or value-added tax (VAT).
Name	Type string Properties Filter, Group, idLookup, Sort Description Name of the tax.
QuoteLineItemId	Type reference Properties Filter, Group, Sort Description ID of the related quote line item. This is a relationship field. Relationship Name QuoteLineItem Relationship Type Lookup Refers To QuoteLineItem
Rate	Type percent Properties Filter, Nillable, Sort Description If the tax is a percentage tax, then this field contains the percent value. If the tax is a fixed amount, then this field is null.
TaxEffectiveDate	Type date Properties Filter, Group, Sort

Field	Details
	Description The date used to calculate the tax rate.
Type	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Whether the tax is estimated or calculated by the tax provider. Possible values are: - Actual - Estimated

QuoteLineWorkSource

Represents an association between a quote and work sources, such as assets, quote line items, order products, or work type groups. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AssetId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The asset associated with the quote work source. This field is a relationship field. Relationship Name Asset Refers To Asset

Field	Details
OrderItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The order product associated with the quote work source. This field is a relationship field. Relationship Name OrderItem Refers To OrderItem
QuoteId	Type reference Properties Create, Filter, Group, Sort Description The quote associated with the quote work source. This field is a relationship field. Relationship Name Quote Relationship Type Master-detail Refers To Quote (the master object)
QuoteLineItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The quote associated with the quote work source. This field is a relationship field. Relationship Name QuoteLineItem Refers To QuoteLineItem
WorkTypeGroupId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The quote associated with the work source This field is a relationship field.
	Relationship Name WorkTypeGroup
	Refers To WorkTypeGroup

QuoteRecipientGroup

Represents a recipient group for which offers or products with the same configuration are being added. This also includes reusing these groups to add or remove recipients. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ActualMemberCount	Type int Properties Filter, Group, Nillable, Sort Description The actual number of members in the quote recipient group.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the quote recipient group.
ExpectedMemberCount	Type int

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The expected number of members in the quote recipient group.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The most recent date on which a user referenced this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The most recent date on which a user viewed this record.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the quote recipient group.
QuoteId	Type reference Properties Create, Filter, Group, Sort Description The ID of a quote recipient group. This field is a relationship field. Relationship Name Quote Relationship Type Master-detail Refers To Quote (the master object)

Field	Details
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates whether the quote recipient group is active. Possible values are: • Active • Inactive The default value is Active.

QuoteRecipientGroupMember

Represents a junction between a quote line item recipient and a quote recipient group. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The most recent date on which a user referenced this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The most recent date on which a user viewed this record.

Field	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the quote recipient group member.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of a quote recipient group member. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
QuoteLineItemRecipientId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The quote line item recipient associated with the quote recipient group. This field is a relationship field. Relationship Name QuoteLineItemRecipient Refers To QuoteLineItemRecipient
QuoteRecipientGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The quote line item recipient group associated with the quote recipient group. This field is a relationship field. Relationship Name QuoteRecipientGroup

Field	Details
	Refers To QuoteRecipientGroup

RecentFieldChange

Use this virtual object to see how an opportunity has changed in the past seven days. Learn the previous value of a field, who made the change, and when the change was made. This object is available in API version 52.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To use RecentFieldChange, set up historical trend reporting for opportunities in your org. You must also have the Pipeline Inspection user permission and the Pipeline Inspection setting enabled.

Fields

Field	Details
ChangeDate	Type dateTime Properties Description The date and time that the specified field was changed.
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The ISO code for the currency value. Must be one of the valid alphabetic, three-letter currency ISO codes defined by the ISO 4217 standard, such as USD, GBP, or JPY. The default value is 'USD'.
FieldName	Type string Properties Filter, Group

Field	Details
	Description The name of the opportunity field that you want the previous value of. Possible values are: - Amount - CloseDate - StageName - ForecastCategory - NextStep
ParentId	Type reference Properties Filter, Group Description The ID of the opportunity that you want the change history for. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To Opportunity
PreviousCurrencyValue	Type currency Properties Nillable Description The previous value of a currency field on an opportunity.
PreviousDateOnlyValue	Type date Properties Group, Nillable Description The previous value of a date field on an opportunity.
PreviousTextValue	Type string Properties Group, Nillable

Field	Details
	Description The previous value of a text field on an opportunity.
ValueChangedById	Type reference Properties Group Description The ID of the user who changed the specified field's value during the specified time period. This is a relationship field. Relationship Name ValueChangedBy Relationship Type Lookup Refers To User

Usage

One recentFieldChange record is returned for each field that was changed in the past seven days. The supported fields are Amount, Close Date, Forecast Category, Next Step, and Stage Name. Only the most recent previous value is returned.

 **Example:** To see the most recent previous amount for an opportunity, use the following query. Replace 006R0000XXXXXXXXXX with the ID of the opportunity.

```
select PreviousTextValue from RecentFieldChange where ParentId = '006R0000003JkHBIA0'
and FieldName = 'StageName'
```

If the sales rep didn't change the opportunity stage name in the past seven days, no values are returned. If the sales rep changed the opportunity amount several times in the past seven days, only the most recent previous value is returned.

 **Example:** To see the most recent previous amount, close date, forecast category, next step, and stage name for an opportunity, use the following query. Replace 006R0000XXXXXXXXXX with the ID of the opportunity.

```
select PreviousTextValue, PreviousCurrencyValue, PreviousDateOnlyValue from
RecentFieldChange where ParentId = '006R0000XXXXXXXXXX' and FieldName IN ('StageName',
'Amount', 'CloseDate')
```

If the opportunity amount, close date, forecast category, next step, and stage name didn't change in the past seven days, no values are returned.

RecentlyViewed

Represents records or list views that the current user has recently viewed or referenced (by viewing a related record). List views are available in API version 29.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `update()`

Special Usage Rules

The RecentlyViewed object doesn't support the Event, Task, Report, KnowledgeArticle, and Article objects.

The RecentlyViewed object supports only certain objects, and supports list views only for those supported objects. Supported objects have the fields `LastReferencedDate` and `LastViewedDate`.



Note: RecentlyViewed records for users who are members of several communities can't be retrieved automatically into a map via Apex. This is because records of a user with different networks can result in duplicate IDs that maps don't support.

Fields

Field	Details
Alias	Type string Properties Filter, Group, Nillable, Sort Description The alias on the record.
Email	Type email Properties Filter, Group, Nillable, Sort Description The email address on the record.
FirstName	Type string Properties Filter, Group, Nillable, Sort Description The first name on the record. If the recently viewed record is a user, the value is the user's first name.
Id	Type ID Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description The ID of the recently viewed record or list view.
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the recently viewed record is an active user (<code>true</code>) or not (<code>false</code>). This field contains a value only if the recently viewed record is a user.
LastName	Type string Properties Filter, Group, Nillable, Sort Description The last name on the record.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort, Update Description The timestamp when the current user last interacted with this record, directly or indirectly. • Viewing or opening a record. • Selecting a record in a lookup search or related list search.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort, Update Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (<code>LastReferencedDate</code>), but not viewed it.
Name	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The name on the recently viewed record or list view. If the recently viewed record is a user, contact, or lead, the value is a concatenation of the <code>firstname</code> and <code>lastname</code> field values.
NetworkId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the Experience Cloud site that this group is part of. This field is available only if digital experiences is enabled in your org. You can add a <code>NetworkId</code> only when creating a group. You can't change or add a <code>NetworkId</code> for an existing group. This field is available in API version 27.0 and later.
Phone	Type phone Properties Filter, Group, Nillable, Sort Description The phone number on the record.
ProfileId	Type reference Properties Filter, Group, Nillable, Sort Description If the recently viewed record is a user, this value is the user's profile ID. This field is a relationship field. Relationship Name Profile Relationship Type Lookup Refers To Profile
Title	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description If the recently viewed record is a user, this value is the title of the user; for example CFO or CEO.
Type	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The object type for this recently viewed record or list view. Valid values include any standard or custom objects that RecentlyViewed supports.
UserRoleId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user role associated with this object. This field is a relationship field. Relationship Name UserRole Relationship Type Lookup Refers To UserRole

Usage

This object provides a heterogeneous list of different object types. The list consists of recently viewed records, records that were recently referenced (a related record was viewed), or recently viewed list views. A record is considered viewed when the user sees the record details, but not when the user sees the record in a list with other records. Use this object to programmatically construct a list of recently viewed items specific to the current user. For example, use this object on a custom user interface or for search auto-complete options. You can also retrieve a filtered list of records by object type (`Type`). The RecentlyViewed data is periodically truncated down to 200 records and 200 list views. RecentlyViewed data is retained for 90 days, after which it's removed on a periodic basis.

Use this query in your code to retrieve a list of all the records and list views that were recently viewed. The results are ordered from most to least recent.

```
SELECT Id, Name
FROM RecentlyViewed
WHERE LastViewedDate !=null
ORDER BY LastViewedDate DESC
```

Use this query to retrieve data that was either viewed or referenced, but only for a limited set of objects.

```
SELECT Id, Name
FROM RecentlyViewed
WHERE Type IN ('Account', 'Contact', 'Plan__c')
ORDER BY LastViewedDate DESC
```

This query retrieves a list of all recently viewed contacts with contact-specific fields, such as the contact’s account name, and the custom website field. Records are ordered from most to least recent.

```
SELECT Account.Name, Title, Email, Phone, Website__c
FROM Contact
WHERE LastViewedDate != NULL
ORDER BY LastViewedDate DESC
```

Recommendation

Represents the recommendations surfaced as offers and actions for Einstein Next Best Action. This object is available in API version 45.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

You must have the Modify All Data or Manage Next Best Action Recommendations user permission to create and edit recommendations.

Fields

Field	Details
AcceptanceLabel	Type string Properties Create, Filter, Group, Sort, Update Description Label that appears as the accept option on the surfaced recommendation. Maximum size is 80 characters.
ActionReference	Type string Properties Create, Filter, Group, Sort, Update Description Flow referenced for this recommendation. Label is Action.

Field	Details
Description	Type string Properties Create, Filter, Group, Sort, Update Description Text description of the recommendation. Maximum size is 255 characters.
ExternalId	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Stores an identifier for the recommendation source, such as product, so Einstein can group all responses for a given recommendation.
ImageId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Image referenced by this recommendation. Label is Image. This is a relationship field. Relationship Name Image Relationship Type Lookup Refers To ContentAsset
IsActionActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the flow referenced in the Action field is active (true) or not (false). Read only.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The date and time when the recommendation was last referenced.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the recommendation was last viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the recommendation. Maximum size is 80 characters.
NetworkId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the Experience Cloud site associated with the recommendation (if applicable).
RecommendationKey	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Track responses to a recommendation when it doesn't have an ID. Maximum size is 255 characters.
RejectionLabel	Type string Properties Create, Filter, Group, Sort, Update Description Label that appears as the reject option on the surfaced recommendation. Maximum size is 80 characters.

Associated Objects

This object has the following associated objects. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

RecommendationChangeEvent (API version 48.0)

Change events are available for the object.

RecommendationResponse

Represents the user responses to a presented offer or recommendation for Einstein Next Best Action. This object is available in API version 51.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()` `query()`, `retrieve()`,

Special Access Rules

You must have one of these user permissions to read, delete, or update recommendation responses:

- Modify All Data
- Manage Next Best Action Recommendations
- Manage Next Best Action Strategies

Fields

Field	Details
ActionReference	Type string Properties Create, Filter, Group, Nillable, Sort Description The full name of an action flow at the time of the response. The full name includes the action’s namespace.
ContextRecord	Type string Properties Create, Filter, Group, Nillable, Sort Description The ID of context record that contains the Einstein Next Best Action component. For example, if the Einstein Next Best Action component is on a case record the ContextRecord is the ID of the case record.

Field	Details
ContextRecordName	Type string Properties Filter, Group, Nillable, Sort Description The name of the context record.
ContextRecordType	Type string Properties Filter, Group, Nillable, Sort Description The name of the object that's associated with the value stored in the ContextRecord field. For example, Account, Case, or Contact.
NetworkId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the Experience Cloud site associated with the recommendation (if applicable). This is a relationship field. Relationship Name Network Relationship Type Lookup Refers To Network
OnBehalfOf	Type string Properties Create, Filter, Group, idLookup, Sort Description The user ID or record that is indirectly reacting to the recommendation.
OnBehalfOfName	Type string Properties Filter, Group, Sort

Field	Details
	Description Name of the value stored for OnBehalfOf at time of response.
OnBehalfOfType	Type string Properties Filter, Group, Nillable, Sort Description The name of the object that's associated with the value stored in the OnBehalfOf field. For example, Account, Case, or Contact.
RecommendationKey	Type string Properties Create, Filter, Group, Sort Description RecommendationId if available, otherwise a generated string that represents the recommendation name.
RecommendationName	Type string Properties Create, Filter, Group, Nillable, Sort Description Name of the recommendation returned from the recommendation strategy.
RecommendationType	Type string Properties Create, Filter, Group, Sort Description Object type of the recommendation. It can be Recommendation or any object type mapped to the Recommendation object. For example, if you map Product to Recommendation, the RecommendationType is Product.
Response	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The user's response to the recommendation. Possible values are:

Field	Details
	- Accepted - Rejected
StrategyReference	Type string Properties Create, Filter, Group, Sort Description The full name of a recommendation strategy flow at the time of the response. The response is formatted as <code>namespace underscore prefix double underscore flowname</code>, such as <code>namespace_prefix__flowname</code>.
StrategyVersion	Type string Properties Filter, Group, Sort Description The recommendation strategy version that's active at the time of the response.

Usage

The RecommendationResponse object can't be customized with additional fields.

RecordAction

Represents a relationship between a record and an action, such as a flow. Create a RecordAction for every action that you want to associate with a particular record. Available in API version 42.0 and later.



Note: Access to the RecordAction object is determined by a user's access to the associated parent record.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, only authenticated internal and external users can access this object.

Fields

Field	Details
ActionDefinition	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Required in Lightning Flow for Service implementations that use version 44.0 or later of the API. The API name of the action to associate with the record; for example, the API name of a flow. Use this field rather than FlowDefinition. To distinguish a quick action from a flow with the same API name, we prepend "QuickAction" to the API name of every quick action.
ActionType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Required in Lightning Flow for Service implementations that use version 46.0 or later of the API. The type of action. Possible values are: • Flow (default) • QuickAction For versions of the API prior to version 46.0, this field is set to Flow.
FlowDefinition	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Optional in Lightning Flow for Service implementations using version 42.0 or 43.0 of the API. An upgrade to Winter '19 or later, which uses API version 44.0 or later, copies FlowDefinition to ActionDefinition. For versions 42.0 and 43.0, this field is the API name of the flow that's associated with the record.
FlowInterviewId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Optional. The flow interview ID of the paused or completed flow. This field can't be set in Process Builder. This is a relationship field.

Field	Details
	Relationship Name FlowInterview Relationship Type Lookup Refers To FlowInterview
IsMandatory	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Optional. Specifies whether the action is mandatory. The default value is false.  Note: At runtime, we show a reminder when the user closes a mandatory flow without completing it. We don't show the reminder for quick actions.
IsUiRemoveHidden	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Optional. Specifies whether the ability to remove the action is hidden in the UI. The default value is false. If true, the UI hides the ability to remove the action. However, actions can still be deleted using the API.
Order	Type int Properties Create, Filter, Group, Sort, Update Description Required. The order of the action among all actions associated with this record.
ParticipantRoleId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The participant role that's associated with the record action. This field is a polymorphic relationship field and is available in API version 58.0 and later. Relationship Name ParticipantRole

Field	Details
	Relationship Type Lookup Refers To ParticipantRole
Pinned	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Required. Specifies whether the action is pinned to the top or bottom of the component. If an action is pinned, users see the Remove option in the UI unless <code>IsUiRemoveHidden</code> is set to true. Possible values are: • None (default) • Top • Bottom
RecordId	Type reference Properties Create, Filter, Group, Sort, Update Description Required. Record associated with the action. In version 46.0 and above, we support most object types. To learn about supported objects, see the Lightning Flow for Service Developer's Guide . This is a relationship field. Relationship Name Record Relationship Type Lookup Refers To Account, Address, Asset, AssetRelationship, AssignedResource, AssociatedLocation, Campaign, CampaignMember, CarePreauth, CarePreauthItem, Case, ChangeRequest, CollaborationGroup, Contact, ContactRequest, Contract, CoverageBenefit, CoverageBenefitItem, EnhancedLetterhead, Incident, Lead, Location, MemberPlan, OperatingHours, Opportunity, Order, PlanBenefit, PlanBenefitItem, Problem, Pricebook2, PricebookEntry, Product2, ProductItem, ProductItemTransaction, ProductRequest, ProductRequestLineItem, ProductRequired, ProductTransfer, PurchaserPlan, PurchaserPlanAssn, RebateMemberAggregateItem, ResourceAbsence, ResourcePreference, ReturnOrder, ReturnOrderLineItem, ServiceAppointment, ServiceResource, ServiceResourceSkill, ServiceTerritory, ServiceTerritoryMember, Shipment, SkillRequirement, SocialPersona,

Field	Details
	SocialPost, TimeSlot, User, Visit, VoiceCall, WorkOrder, WorkOrderLineItem, WorkType, WorkTypeGroup ChangeRequest, Incident, Problem are available in API version 53.0 and later. RebateMemberAggregateItem is available in API version 54.0 and later.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Required. The current state of the action. Possible values are: • New (default) • Paused • Complete • Started • Unlinked—The action was unlinked because the flow was paused and the current record for the flow interview changed. Paused and unlinked statuses do not apply to quick actions. This field can't be set in Process Builder.

Usage

The RecordAction object works with the Actions & Recommendations component in Lightning Experience. Although this junction object can be used to create relationships between records and actions in Salesforce Classic, those relationships can't be displayed in Salesforce Classic.



Note: API version 44.0 added a field, ActionDefinition, so that a RecordAction in future releases can support other types of actions in addition to flows. API version 44.0 and later maintain the FlowDefinition field to support processes that reference this field in earlier API versions. Upgrading an org to Winter '19 or later, which uses API version 44.0 or later, copies the FlowDefinition field to the ActionDefinition field. FlowDefinition will be deprecated in a future release, so use ActionDefinition instead.

When an action is deleted that's referenced in an ActionDefinition or FlowDefinition, the RecordAction object is deleted. RecordAction objects are also deleted when the associated parent record is deleted, or when a flow is paused and the current record context has changed. When an action is completed, the associated RecordAction object is also deleted.

Deleted RecordActions are removed from the list when the page is refreshed.

For more information about the Actions & Recommendations component and how it works with RecordActions, see the [Lightning Flow for Service Developer Guide](#).


Java Example

Here’s an example of how to associate flows to a record using the RecordAction object.

```
public void associateNewCustomerFlowWithAccount(Account a) {
    try {
        RecordAction newRecordAction = new RecordAction();
        newRecordAction.setRecordId(a.getId());
        newRecordAction.setActionDefinition("New_Customer_Flow");
        newRecordAction.setOrder(1);

        SaveResult[] results = connection
            .create(new SObject[] { newRecordAction });
    } catch (ConnectionException ce) {
        ce.printStackTrace();
    }
}
```

Data Model

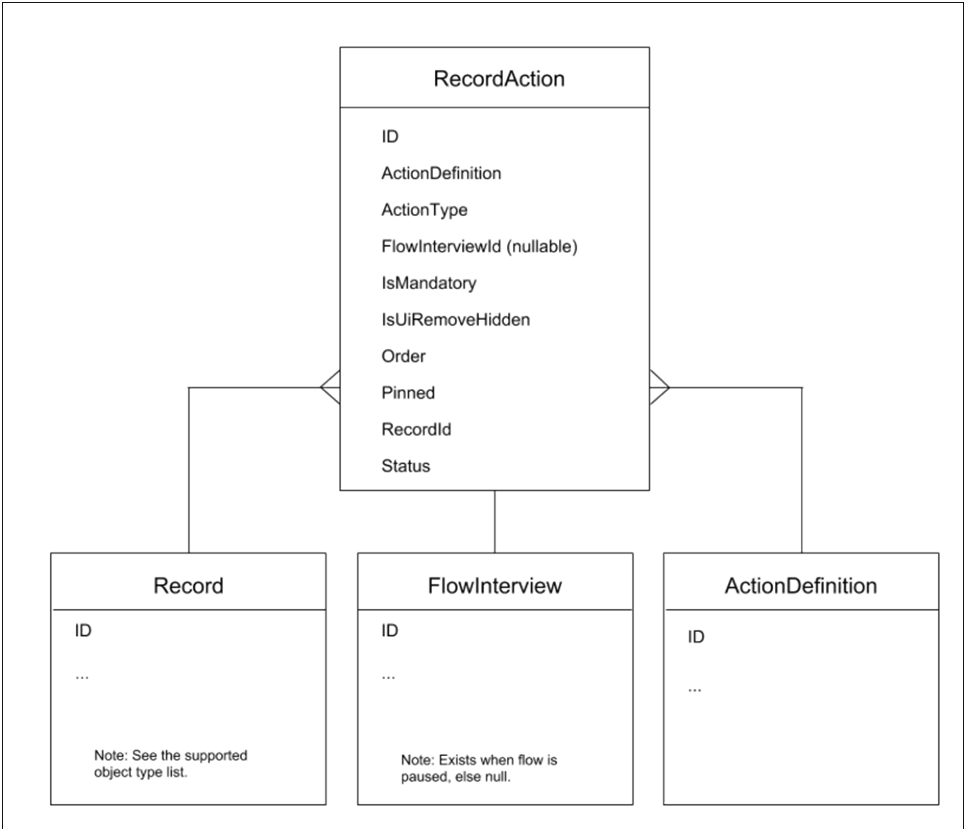

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

RecordActionHistory

History is available for tracked fields of the object.

RecordActionHistory

Represents the lifecycle of a RecordAction as it goes through different states. Available in API version 44.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Special Access Rules

This object is always read-only.

Fields

Field	Details
ActionDefinitionApiName	Type string Description Required. The API name of the action associated with the record. To distinguish a quick action from a flow with the same API name, we prepend "QuickAction" to the API name of every quick action.
ActionDefinitionLabel	Type string Description Required. The label of the action that took place.
ActionType	Type picklist Properties Defaulted on create, Restricted picklist Description Required. The type of action associated with the record. Possible values are: - Flow (default) - QuickAction
IsMandatory	Type boolean

Field	Details
	Properties Defaulted on create Description Optional. Specifies whether the action is mandatory. The default value is false.
LoggedTime	Type dateTime Properties Filter, Sort Description Required. The timestamp when the state change occurred.
ParentRecordId	Type reference Properties Filter, Sort Description Required. The parent record for the associated action. This is a relationship field. Relationship Name ParentRecord Relationship Type Lookup Refers To Account, Address, Asset, AssetRelationship, AssociatedLocation, Case, ChangeRequest, CollaborationGroup, Contact, ContactRequest, Contract, EnhancedLetterhead, Incident, Lead, Location, OperatingHours, Opportunity, Order, Pricebook2, PricebookEntry, Problem, Product2, ProductItem, ProductItemTransaction, ProductRequest, ProductRequestLineItem, ProductRequired, ProductTransfer, RebateMemberAggregateItem, ResourceAbsence, Scorecard, ServiceAppointment, ServiceResource, ServiceResourceSkill, ServiceTerritory, ServiceTerritoryMember, Shipment, SkillRequirement, SocialPersona, SocialPost, TimeSlot, User, Visit, VoiceCall, WorkType ChangeRequest, Incident, Problem are available in API version 53.0 and later. RebateMemberAggregateItem is available in API version 54.0 and later.
Pinned	Type picklist Properties Defaulted on create, Nillable, Restricted picklist Description Optional. Specifies whether the action is pinned to the top or bottom, or unpinned. Possible values are:

Field	Details
	• None • Top • Bottom
RecordActionId	Type string Properties Filter, Sort Description Required. The ID of the RecordAction.
State	Type picklist Properties Defaulted on create, Restricted picklist Description Required. The state of the action. A state change triggers the logging of a history event. Possible values are: • Started (default) • Paused • Resumed • Completed • Unlinked—The action was unlinked because the flow was paused and the current record for the flow interview changed.
UserId	Type reference Description Required. The user that conducted the action. This is a polymorphic relationship field. Relationship Name User Relationship Type Lookup Refers To User

Usage

The RecordActionHistory object represents the lifecycle of an action on a record as it goes through different states.

The RecordActionHistory object is a big object. For this reason, when you use synchronous SOQL, SOAP, REST, Bulk, or Apex APIs to read this object, queries must follow a specific pattern or they fail. Queries must match one of these patterns and use fields in this precise order when more than one field is used.

- ParentRecordId
- ParentRecordId, LoggedTime (DESC)
- ParentRecordId, LoggedTime (DESC), RecordActionId

For example, this SOQL query follows the ParentRecordId, LoggedTime (DESC) pattern.

```
SELECT ActionDefinitionApiName, User, State FROM RecordActionHistory WHERE
    ParentRecordId = {CaseId} ORDER BY ParentRecordId, LoggedTime DESC
```

Asynchronous SOQL queries do not need to follow a pattern, and can query any field.

Apex triggers cannot reference big object records. Use SOQL queries if you want to query RecordActionHistory records in Apex.

For more information about the Actions & Recommendations component and how it works with RecordActions, see the [Lightning Flow for Service Developer Guide](#). Learn more about big objects and how to query them in the [Query Big Objects](#) module on Trailhead.

Java Example

Here's a Java example of how to query a RecordActionHistory object.

```
public void queryHBPOs(String parentRecordId) {
    try {
        SimpleDateFormat format = new SimpleDateFormat("yyyy-MM-dd");

        // query for the RecordActionHistory associated with ParentRecord
        QueryResult queryResults = connection.query("SELECT ActionDefinitionApiName,
LoggedTime, State " +
            "FROM RecordActionHistory WHERE ParentRecordId = '" + parentRecordId + "' LIMIT
50");
        if (queryResults.getSize() > 0) {
            for (int i=0;i<queryResults.getRecords().length;i++) {
                // cast the SObject to a strongly-typed RecordActionHistory
                RecordActionHistory raa = (RecordActionHistory)queryResults.getRecords()[i];
                System.out.println("ActionDefinitionApiName: " + raa.getActionDefinitionApiName()
+ " - LoggedTime: " + format.format(raa.getLoggedTime().getTime()) + " - State: " +
                    raa.getState());
            }
        }
    } catch (Exception e) {
        e.printStackTrace();
    }
}
```

RecordsetFilterCriteria

Represents a set of filters that can be used to match service appointments or assets based on your criteria fields. For example, you can create recordset filter criteria so that only service appointments that satisfy the filter criteria are matched to the filtered shifts, and likewise only maintenance work rules that satisfy your criteria are matched to assets. This object is available in API version 50.0 and later. Assets and maintenance work rules are available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
Description	Type textarea Properties Create, Nillable, Update Description The description of the recordset filter criteria.
FilteredObject	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The object used to define the filter criteria. Available in API version 52.0 or later. Possible values are: • Asset • ServiceAppointment
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the recordset filter criteria is associated with shifts or maintenance work rules (<code>true</code>) or not (<code>false</code>).
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The date when the recordset filter criteria was last referenced.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the recordset filter criteria was last viewed.
LogicalOperator	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Defines the logic to evaluate multiple recordset filter criteria rules. Available in API version 53.0 and later. Possible values are: • AND • OR
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the recordset filter criteria.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the recordset filter criteria.
SourceObject	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort

Field	Details
	Description The source object that the filtered criteria are applied to. Shifts and maintenance work rules are available in API version 52.0 and later. Appointment bundle objects are available in API version 53.0 and later. Possible values are: • <code>ApptBundleAggrPolicy</code>—Appointment Bundle Aggregation Policy • <code>ApptBundleConfig</code>—Appointment Bundle Config • <code>Shift</code> • <code>ContractLineOutcome</code> • <code>MaintenanceWorkRule</code>
Usage Rate Field	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Stores the daily usage rate of the asset. The unit for the usage rate must be per day.
Usage Rate Unit	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Defines the rate for Usage Rate Field. Possible values are: • <code>DAYS</code>

Usage

Let's say an employee is open to working a 9 am to 5 pm shift on a Sunday but only for emergency appointments. In this case, the `SourceObject` is `Shift` and the `FilteredObject` is `ServiceAppointment`. The service appointments available for that shift are filtered for emergency appointments using the `RecordsetFilterCriteriaRule` object.

`RecordSetFilterCriteria` isn't available for report types.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

RecordsetFilterCriteriaFeed

Feed tracking is available for the object.

RecordsetFilterCriteriaHistory

History is available for tracked fields of the object.

RecordsetFilterCriteriaOwnerSharingRule

Sharing rules are available for the object.

RecordsetFilterCriteriaShare

Sharing is available for the object.

RecordsetFilterCriteriaRule

Represents a rule using fields from the designated source object to create filters on the filtered, or target, object. RecordsetFilterCriteriaRule is associated with the RecordsetFilterCriteria object. This object is available in API version 50.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
CriteriaField	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The field the filter rule is applied to. Asset fields are available in API version 52.0 and later. Possible values are derived from the source object's standard and custom fields. Possible standard source objects are <code>Asset</code> and <code>ServiceAppointment</code>. The format is, for example, <code>Asset.PricingSource</code> or <code>ServiceAppointment.GroupAppointmentAccessType</code>. All standard and custom fields are allowed except those with these field types: • <code>encryptedstring</code> • <code>multipicklist</code> • <code>textarea</code> • <code>url</code>
LastReferencedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The date when the recordset filter criteria rule was last referenced.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the recordset filter criteria rule was last viewed.
NextOccurence	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description This field's value is compared to the Usage Field to determine if the rule is true. Possible values are derived from the source object's standard and custom fields. Possible standard source objects are <code>Asset</code> and <code>ServiceAppointment</code>. The format is, for example, <code>Asset.PricingSource</code> or <code>ServiceAppointment.GroupAppointmentAccessType</code>. All standard and custom fields are allowed except those with these field types: • <code>encryptedstring</code> • <code>multipicklist</code> • <code>textarea</code> • <code>url</code>
Operator	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The relational operator between <code>CriteriaField</code> and <code>Value</code>. Available in API version 52.0 or later. Possible values are: • <code>Equals—Default</code> • <code>GreaterOrEqual</code> • <code>GreaterThan</code> • <code>LessOrEqual</code> • <code>LessThan</code>

Field	Details
RecordsetFilterCriteriaId	Type reference Properties Create, Filter, Group, Sort Description The ID of the RecordsetFilterCriteria record to associate this rule with.
RecordsetFilterCriteriaRuleNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The automatically assigned number of the recordset filter criteria rule.
Type	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of criteria rule. Possible values are: - Criteria—Default - Usage - UsageCounter— Usage (Counter) - UsageDuration— Usage (Duration)
Value	Type textarea Properties Create, Nillable, Update Description The expected value of CriteriaField applied to the filter rule.
Usage Rate Field	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Stores the daily usage rate of the asset. The unit for the usage rate must be per day. Possible values are derived from the source object's standard and custom fields. Possible standard source objects are Asset and ServiceAppointment. The format is, for example,

Field	Details
	<code>Asset.PricingSource</code> or <code>ServiceAppointment.GroupAppointmentAccessType</code> .
Usage Rate Unit	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Defines the rate for Usage Rate Field. Possible values are: DAYS

Usage

If you want to create a filter rule for service appointments with a dispatched status, set `CriteriaField` to `ServiceAppointment.Status` and `Value` to `Dispatched`. Then add the ID from a `RecordsetFilterCriteria` record to `RecordsetFilterCriteriaId` to associate this rule with a filter criteria for shifts.

RecordsetFtrCritMonitor

Monitors whether the value of an asset attribute is within the threshold of a recordset filter criteria (RFC). You can monitor one or more RFCs for an Asset. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
AssetId	Type reference Properties Create, Filter, Group, Sort, Update

Field	Details
	Description The ID of the asset to link the RFC to. This field is a relationship field. Relationship Name Asset Relationship Type Lookup Refers To Asset
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the RFC associated with the recordset filter criteria monitor.
IsWithinThreshold	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the value of the asset attribute is within the threshold of the RFC. The default value is <code>false</code>.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the recordset filter criteria monitor.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the value was last referenced.
LastViewedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The date the value was last viewed.
RecordsetFilterCriteriaId	Type reference Properties Create, Filter, Group, Sort Description The ID of the recordset filter criteria. This field is a relationship field. Relationship Name RecordsetFilterCriteria Relationship Type Lookup Refers To RecordsetFilterCriteria

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

RecordsetFltrCritMonitorChangeEvent on page 68
Change events are available for the object.

RecordsetFltrCritMonitorHistory on page 63
History is available for tracked fields of the object.

- SEE ALSO:
- [AssetAttribute](#)
 - [AttributeDefinition](#)
 - [AttributePicklist](#)
 - [AttributePicklistValue](#)

RecordType

Represents a record type.

Supported Calls

`create()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

 **Important:** Don't use record types as an access control mechanism. Profile assignment governs create and edit access for an object but doesn't govern read access. For example, a user assigned to a profile that isn't enabled for a particular record type can't create records with that record type, but can access records associated with that record type. Users with access to an object can read all record type information for that object. We strongly recommend against storing sensitive information in the record type description, name, or label. Instead, store sensitive information in a separate object or fields to which you've applied appropriate access controls.

Field	Details
BusinessProcessId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Required for Opportunity and Lead record types in API version 17.0 and later. ID of an associated BusinessProcess.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A description of this record. Limit: 255 characters.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description Required. The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Label is Record Type Name.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.

Field	Details
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this record is active (<code>true</code>) or not (<code>false</code>). Only active record types can be applied to records. Label is Active.
IsPersonType	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this record has been designated as a person account (<code>true</code>) or not (<code>false</code>). Visible only if the organization has the person account feature enabled.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Label of the record type in the user interface. Limit: 80 characters. Label is Record Type Label.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.

Field	Details
SubjectType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Object to which this record type applies, including custom objects.

Usage

Use this object to offer different BusinessProcess records and subsets of picklist values to different users based on their Profile. Your client application can describe or query RecordType records.

Client applications can create or update values in `RecordTypeId` on these objects, specifying a valid record type ID associated with these objects.



Note: You can't create or update the `RecordTypeId` field on the CampaignMember records. Set the CampaignMember record type using the `CampaignMemberRecordTypeId` field on Campaign.

A client application can retrieve the list of valid record type IDs for a given object by querying the RecordType.

RecordTypeLocalization

Represents the translated value of a label for a record type when the Translation Workbench is enabled for your organization.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

- Your organization must be using Professional, Enterprise, Developer, Unlimited, or Performance Edition and be enabled for the Translation Workbench.
- To view this object, you must have the "View Setup and Configuration" permission.

Fields

Field	Details
Language	Type string Properties Create, Filter, Nillable, Restricted picklist

Field	Details
	Description The language for this translated label.
NamespacePrefix	Type string Properties Filter, Nillable Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, NamespacePrefix is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, NamespacePrefix is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
ParentId	Type reference Properties Create, Filter, Nillable Description The ID of the RecordType associated with the label that is being translated.
Value	Type string Properties Create, Filter, Nillable, Update Description The actual translated label for the record type. Label is Translation.

Usage

Use this object to translate the labels of your record types into other supported languages.

RecordVisibility (Pilot)

Represents the visibility attributes that determine a record's read access. This object is read only and is available in API version 46.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you need a CRM Analytics license or to contact Salesforce to participate in the pilot program. You must also have the "View All Data" or "Enable RecordVisibility API" user permission.



Note: We provide the RecordVisibility object to selected customers through a pilot program that requires agreement to specific terms and conditions. To be nominated to participate in the program, contact Salesforce. Pilot programs are subject to change, and we can't guarantee acceptance. The RecordVisibility object isn't generally available unless or until Salesforce announces its general availability in documentation or in press releases or public statements. We can't guarantee general availability within any particular time frame or at all. Make your purchase decisions only on the basis of generally available products and features. You can provide feedback and suggestions for the RecordVisibility object in the group in the [Trailblazer Community](#).

Fields

Field Name	Details
RecordId	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The ID of the record.
VisibilityAttribute	Type string Properties Filter, Nillable, Sort Description The visibility attributes that determine the read access of a given record. For example, a user ID, parent record ID, or group ID. The output of visibility attributes is in JSON format and must be deserialized.

Usage

Use this object to query the attributes that determine the visibility of one or more records. You can't create, delete, or update any records using this object.

Up to 200 record IDs can be queried. You can include an `ORDER BY` clause for any field that is being selected in the query.

This sample query returns the visibility attributes for the indicated record.

```
SELECT RecordId, VisibilityAttribute
FROM RecordVisibility
WHERE RecordId=[single ID]           // or Record IN [list of IDs]
```

The `RecordId` and `VisibilityAttribute` fields must be a part of the fields that are being selected despite `RecordId` being used in the filter criteria as well.

`RecordVisibility` is a foreign key on the records. This query returns the visibility attributes for Account records:

```
SELECT Id, Name, RecordVisibility.VisibilityAttribute
FROM Account
```

You can't filter `RecordId` fields when using `RecordVisibility` as a lookup or foreign key.

You can use `RecordVisibilityContext` to filter `WITH` clauses in queries. For more information, see [WITH filteringExpression](#) in the *SOQL and SOSL Reference*.

RedirectWhitelistUrl

Represents a trusted URL for external user redirections. Redirections to a different Salesforce org, including its publicly served pages and content, are allowed from your Salesforce org only when the URL is a `RedirectWhitelistUrl`. For non-Salesforce URLs, a session setting controls whether redirections from pages and components built in Salesforce Classic are restricted to `RedirectWhitelistUrl` objects. Except for cross-org redirections, you can't restrict redirections that originate from pages and components built with Lightning Experience. This object is available in API version 48.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. Because changing terms in our code can break current implementations, we maintained this object's name.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Only authenticated internal and external users with the View Setup and Customize Application permissions can access or edit this object.

Fields

Field	Details
<code>DeveloperName</code>	Type string

Field	Details
	Properties Create, Filter, Group, Sort, Update Description The unique name of the custom help section in the API. This name can contain only underscores and alphanumeric characters and must be unique in your organization. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. The label corresponds to the section title in the user interface. Limit: 80 characters. When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record. Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Language of the label.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The label of the trusted URL.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This

Field	Details
	field's value is the namespace prefix of the Developer Edition org of the package developer. In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
Url	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The trusted URL. These formats are accepted: <code>example.com</code>, <code>*.example.com</code>, and <code>https://example.com</code>. The host section of the URL can include an asterisk (*) as a wildcard. Otherwise, the URL cannot be malformed. Examples of malformed URLs that fail a syntax check are <code>malformed^url.example.com</code>, and <code>https://{subdomain}.example.com</code>. To add a URL to a <code>RedirectWhitelistUrl</code> based on parameters, build the URL before you update the <code>Url</code> field.

Usage

Only redirections are restricted to the URLs in this object. A direct anchor link to an external URL is always allowed, even if that URL isn't in the allowlist. An example of a direct anchor link is `<a href="targetUrl">linkText</a>`.

Redirections include parameters that redirect the user and anchor links that include a redirection. For example, this anchor link includes a redirection: `<a href="/?startURL=targetUrl">linkText</a>`. And this form action redirects the user through the `saveURL` parameter: `<form action="/xyz?saveURL=targetURL">`.

If the `targetUrl` belongs to another Salesforce org, the redirection is permitted only when the target URL is a `RedirectWhitelistUrl`.

If the `targetUrl` isn't a Salesforce org URL, the redirection is checked against the `RedirectWhitelistUrl` object only when both of these conditions are met.

- The redirection originates from a Salesforce Classic page or component.
- Either the `redirectBlockModeEnabled` or `redirectionWarning` SessionSettings field in the [SecuritySettings](#) Metadata API is `true`.



Note: Salesforce verifies the initial redirection outside of Salesforce against the `RedirectWhitelistUrl` object. However, Salesforce can't verify subsequent redirections. For example, if a link on a Visualforce page takes the user to `https://www.example.com`, Salesforce verifies that you allowed redirections to `https://www.example.com`. If that URL then redirects the user to `https://spam.example.com`, Salesforce can't check that redirection, because it occurs outside of Salesforce.

For non-Salesforce URLs, you can choose whether to alert users about untrusted external redirections or to block those redirections entirely via the `redirectBlockModeEnabled` and `redirectionWarning` fields on the `SecuritySettings` metadata API type. These restrictions apply only to redirections from pages and components built in Salesforce Classic.

There’s one last special case to cover. For Salesforce org URLs, Salesforce always allows redirections to URLs within the same org, including redirections from previous My Domain URLs. When the `enableCrossOrgRedirect` field on the `SecuritySettings` metadata API type is `false`, Salesforce checks user redirections to other Salesforce orgs via a direct link, a post-action URL, or a post-login URL. If the URL isn’t a `RedirectWhitelistURL`, the user isn’t redirected. An example of a direct link is `<a href="https://www.example.com">example.com</a>`. Post-action URLs and post-login URLs use a protected URL redirect parameter, such as `retURL`, `startURL`, `saveURL`, `cancelURL`, and `targetURL`.

Refund

Represents a refund made against a payment. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

 **Note:** You can only delete a payment in draft state, which you specify in the **Status** field.

Special Access Rules

To access Salesforce Payments objects with the API, your org must have one or more of these licenses: Salesforce Payments, Salesforce Order Management, B2B Commerce, or D2C Commerce. Salesforce Payments objects are available only in Lightning Experience.

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The customer account containing the payment that this refund targets. This is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
Amount	Type currency

Field	Details
	Properties Create, Filter, Sort, Update Description Total amount of this refund.
Balance	Type currency Properties Filter, Nillable, Sort Description Remaining balance following refund line applications. Equal to the Amount field – the Net Applied field.
CancellationDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date that the refund was canceled. This is a required parameter for void services.
CancellationEffectiveDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date that the cancellation of this refund takes effect.
CancellationGatewayDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date when the cancellation transaction was processed in the payment gateway.
CancellationGatewayRefNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Unique ID for the cancellation transaction. Generated by the payment gateway.

Field	Details
CancellationGatewayResultCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Gateway-specific result code for the cancellation transaction. Generated by the payment gateway. Must be mapped to a Salesforce-specific result code.
CancellationSfResultCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Salesforce-specific result code that can map to one or more gateway result codes. We recommend configuring the payment gateway adapter layer to map gateway result codes to the appropriate Salesforce result code.
ClientContext	Type textarea Properties Nillable Description Contains caller context for payment APIs. Useful for re-establishing context during an asynchronous payment transaction.
Comments	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Users can add comments to provide additional details about a record. Maximum of 1000 characters.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Three-letter ISO 4217 currency code associated with the payment group record.
Date	Type dateTime

Field	Details
	Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description The date and time that this refund was created.
EffectiveDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Defines the date and time when the refund application becomes effective.
Email	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description Email address of the person who initiated the refund.
GatewayDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date that a successful gateway communication caused the creation of this refund.
GatewayRefNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Unique transaction ID created by the payment gateway.
GatewayResultCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Gateway-specific result code. Must be mapped to a Salesforce-specific result code.
GatewayResultCodeDescription	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the GatewayResultCode. Useful for providing additional context as to why the gateway returned a specific result code.
ImpactAmount	Type currency Properties Filter, Nillable, Sort Description Shows the refund's financial impact against the customer's accounts receivable. If the refund amount is valid, it equals the Amount field. Equals 0 when the refund amount is void. Has a null value when the refund is canceled.
IpAddress	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The IP address of the person who initiated the payment.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record can have been referenced (LastReferencedDate) but not viewed.
MacAddress	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The MAC address of the person who initiated the refund.
NetApplied	Type currency Properties Filter, Nillable, Sort Description Equals the Total Applied field minus the Total Unapplied field.
OrderPaymentSummaryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Order payment summary record that shows the balances of each authorization, capture, and refund made against an order.
PaymentGatewayId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The payment gateway used to process this refund. This is a relationship field. Relationship Name PaymentGateway Relationship Type Lookup Refers To PaymentGateway
PaymentGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The payment group for the payment being refunded. This is a relationship field. Relationship Name PaymentGroup

Field	Details
	Relationship Type Lookup Refers To PaymentGroup
PaymentID	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the payment record. This field is a relationship field. Relationship Name Payment Relationship Type Lookup Refers To Payment
PaymentIntentID	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the payment intent record. This field is a relationship field. Relationship Name PaymentIntent Relationship Type Lookup Refers To PaymentIntent
PaymentMethodId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The payment method used to create the payment being refunded. This is a relationship field.

Field	Details
	Relationship Name PaymentMethod Relationship Type Lookup Refers To PaymentMethod
Phone	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description Phone number of the customer who initiated the refund.
ProcessingMode	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Defines whether the payment has been made outside of the payment platform. Possible values are: • External: Transactions happened outside of the Salesforce payments platform. • Salesforce: Salesforce made and recorded an external call to the payment gateway.
RefundNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description System-created unique ID for this refund.
SfResultCode	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Salesforce-specific result code that can map to one or more gateway result codes. We recommend configuring the payment gateway adapter layer to map gateway result codes to the appropriate Salesforce result code. Possible values are:

Field	Details
	• Decline: The gateway call failed but the transaction can be attempted again. For example, the customer had insufficient funds or briefly lost their connection. • Indeterminate: The gateway didn't respond to the call. This response usually happens when Salesforce times out while waiting for a response from the gateway. • PermanentFail: The gateway call failed and can't work even if tried again. Gateway calls fail permanently for one of two reasons: – Hard Decline: The customer's payment account has been closed or terminated. – Fraud: The gateway recognized the payment or payment method as known fraud. • RequiresReview: The customer bank requires more information before completing the payment. • Success: The gateway call succeeded. • SystemError: Salesforce ended the payment request before receiving a response. For example, Salesforce lost credentials or access to its server. Salesforce ends payment calls if it doesn't receive a response from the gateway within two minutes. • ValidationError: Customer payment data was incorrect, such as a misspelling in the credit card address or an incorrect CVV.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Defines the state of this refund. Possible values are: • Canceled: This refund has been voided and can no longer be allocated. • Draft: The refund can be edited before posting it and allocating it to a target. • Processed: This refund has been finalized and can be allocated against a target. Users can manually change the Status field's values as follows: • Draft to Processed • Processed to Canceled • Draft to Canceled
TotalApplied	Type currency Properties Filter, Nillable, Sort Description The sum of Amount fields across all of this refund's applied refund lines.

Field	Details
TotalUnapplied	Type currency Properties Filter, Nillable, Sort Description The sum of Amount fields across all of this refund's unapplied refund lines.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Defines how this refund is used. Possible values are: • NonReferenced: Standalone refund not linked to any payment. • Referenced: Refund made against a payment.

RefundLinePayment

A refund line that has been applied to a payment. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access Commerce Payments entities, your org must have a Salesforce Order Management license with the Payment Platform org permission activated.

Fields

Field	Details
Amount	Type currency Properties Create, Filter, Sort

Field	Details
	Description The total amount applied to or unapplied from a payment by the refund line.
AppliedDate	Type dateTime Properties Create, Filter, Nillable, Sort Description The date that the refund was applied to the linked payment.
AssociatedAccountId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The account for the payment that received the refund. This is a relationship field. Relationship Name AssociatedAccount Relationship Type Lookup Refers To Account
AssociatedRefundLinePaymentId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The refundLine that was unapplied. Populated only when RefundLinePayment's Type has a value of Unapplied. This is a relationship field. Relationship Name AssociatedRefundLinePayment Relationship Type Lookup Refers To RefundLinePayment
Comments	Type textarea

Field	Details
	Properties Create, Filter, Nillable, Sort, Update Description Users can add comments to provide additional information on the refund line payment.
Date	Type dateTime Properties Create, Filter, Nillable, Sort Description By default, the day the refund line payment record was created. Users can also enter a different date.
EffectiveDate	Type dateTime Properties Create, Filter, Nillable, Sort Description Defines the date and time when the refund line application or unapplication becomes effective.
EffectiveImpactAmount	Type currency Properties Filter, Nillable, Sort Description Shows how this payment refund line impacts a customer's accounts receivable. This value is positive when RefundLinePayment's Type field is Applied, and negative when RefundLinePayment's Type is Unapplied. If there's an unapplied line related to this record, EffectiveImpactAmount has a value of 0.  Note: EffectiveImpactAmount evaluates only the applied and unapplied line pair. Therefore, the effective impact amount could be different for different lines within the same refund.
HasBeenUnapplied	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Shows whether this refund line has been unapplied. Possible values are:

Field	Details
	No
ImpactAmount	Type currency Properties Filter, Nillable, Sort Description Shows how this payment refund line impacts a customer's accounts receivable. This value is positive when RefundLinePayment's Type field is Applied, and negative when RefundLinePayment's Type is Unapplied.
PaymentBalance	Type currency Properties Filter, Nillable, Sort Description The payment record's balance following the application or unapplication of this refund line.
PaymentId	Type reference Properties Create, Filter, Group, Sort Description The payment record that this refund line targets. Refund applications and unapplications are made against this payment. This is a relationship field. Relationship Name Payment Relationship Type Lookup Refers To Payment
RefundBalance	Type currency Properties Filter, Nillable, Sort Description The refund record's balance following the application or unapplication of this payment refund line.


Field	Details
RefundId	Type reference Properties Create, Filter, Group, Sort Description The parent refund of this refund line. This is a relationship field. Relationship Name Refund Relationship Type Lookup Refers To Refund
RefundLinePaymentNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description System-created unique ID for this refund line.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Defines whether this line represents a refund that's been applied or unapplied from a payment. Possible values are: • Applied
UnappliedDate	Type dateTime Properties Create, Filter, Nillable, Sort Description The date that this refund line was unapplied from a payment.

Usage

When you're ready to apply a refund's balance to a payment, create a refund line (`RefundLinePayment`). The refund line represents the balance taken from the payment and applied toward the invoice. You can apply a refund's balance when you create the refund record or afterward. The refund line must have the same currency as the parent refund.

A refund has an amount, which represents the total amount taken from the refund, and a balance, which represents the remaining amount after the refund line has been applied to a payment. A refund's amount can't be less than the sum of all of its refund line amounts. You can apply any portion of a refund's balance to a payment.

You can apply a refund to transactions on the same account or to different transactions across different

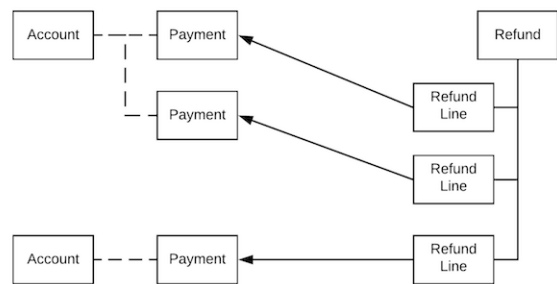

accounts.

RegisteredExternalService

Represents a registered external service used for checkout integrations by data integrators. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

The `RegisteredExternalService` object is available only if the B2B Commerce license is enabled.

Fields

Field	Details
<code>ConfigUrl</code>	Type url Properties Create, Filter, Nillable, Sort, Update Description Link to the configuration page for the integration.

Field	Details
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the external service provider. This field is available in API version 59.0 and later.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
DocumentationUrl	Type url Properties Create, Filter, Nillable, Sort, Update Description Link to documentation for the registered external service.
ExtensionPointName	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description This field is available in API version 55.0 and later. Name of an extension point. Possible values are: • Commerce_Domain_Cart_Calculate • Commerce_Domain_Checkout_CreateOrder • Commerce_Domain_Inventory_CartCalculator • Commerce_Domain_Inventory_Service • Commerce_Domain_OrderManagement_Product

Field	Details
	• <code>Commerce_Domain_Pricing_CartCalculator</code> • <code>Commerce_Domain_Pricing_Service</code> • <code>Commerce_Domain_Promotions_CartCalculator</code> • <code>Commerce_Domain_Promotions_ShippingCalculator</code> • <code>Commerce_Domain_Shipping_CartCalculator</code> • <code>Commerce_Domain_Shipping_SplitShipment</code> • <code>Commerce_Domain_Tax_CartCalculator</code> • <code>Commerce_Domain_Tax_Service</code> • <code>Commerce_Endpoint_Account_Address</code> • <code>Commerce_Endpoint_Account_Addresses</code> • <code>Commerce_Endpoint_Cart_Item</code>—This field value is available in API version 62.0 and later. • <code>Commerce_Endpoint_Cart_ItemCollection</code>—This field value is available in API version 62.0 and later. • <code>Commerce_Endpoint_Catalog_Product</code> • <code>Commerce_Endpoint_Catalog_Products</code> • <code>Commerce_Endpoint_Search_ProductSearch</code> • <code>Commerce_Endpoint_Search_Products</code> • <code>Commerce_Endpoint_Search_ProductsByCategory</code>
ExternalServiceProviderId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of an Apex class functioning as a provider. The Apex class can either implement one of the following interfaces: • <code>sfdc_checkout.CartInventoryValidation</code> • <code>sfdc_checkout.CartPriceCalculations</code> • <code>sfdc_checkout.CartShippingCharges</code> • <code>sfdc_checkout.CartTaxCalculations</code> or the Apex class can extend one of the base classes for an extension. See Available Extensions.
ExternalServiceProviderType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of external service provider. For an extension, you set the type to <code>Extension</code>, and you specify an <code>extensionPointName</code>. For example, for a Pricing Cart Calculator

Field	Details
	extension, you specify <code>Commerce_Domain_Pricing_CartCalculator</code> as the <code>extensionPointName</code>. For an integration, you set the type to one of the other possible values, such as <code>Price</code>, and you omit <code>extensionPointName</code>. Possible values are: • <code>Extension</code> (this value is available in API version 55.0 and later) • <code>Inventory</code> • <code>Price</code> • <code>Promotions</code> (this value is available in API version 53.0 and later) • <code>Shipment</code> • <code>Tax</code>
<code>IconUri</code>	Type url Properties Create, Filter, Nillable, Sort, Update Description URI of icon for the extension provider. This field is available in API version 59.0 and later.
<code>IsApplication</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if the extension provider is contained within a managed package. The default value is <code>false</code>. This field is available in API version 59.0 and later.
<code>Language</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The combined language and locale ISO code, which controls the language for labels displayed in an application. Possible values are: • <code>da</code>—Danish • <code>de</code>—German • <code>en_US</code>—English • <code>es</code>—Spanish

Field	Details
	• <code>es_MX</code>—Spanish (Mexico) • <code>fi</code>—Finnish • <code>fr</code>—French • <code>it</code>—Italian • <code>ja</code>—Japanese • <code>ko</code>—Korean • <code>nl_NL</code>—Dutch • <code>no</code>—Norwegian • <code>pt_BR</code>—Portuguese (Brazil) • <code>ru</code>—Russian • <code>sv</code>—Swedish • <code>th</code>—Thai • <code>zh_CN</code>—Chinese (Simplified) • <code>zh_TW</code>—Chinese (Traditional)
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The primary label for the registered external service.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that aren't Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.

RelatedListColumnDefinition

Represents information about a column in a related list. A related list specifies a set of records for a related object, based on specific criteria. This object is available in API version 55.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

This object is read-only.

Fields

Field	Details
Alias	Typestring PropertiesFilter, Group, Nillable, Sort DescriptionThe unique alias of the column in the related list.
ColumnSoql	Typestring PropertiesFilter, Group, Nillable, Sort DescriptionThe SOQL query string used in a SELECT clause for the column.
DataType	Typestring PropertiesFilter, Group, Nillable, Sort DescriptionThe field type of the column.
DurableId	Typestring PropertiesFilter, Group, Nillable, Sort

Field	Details
	Description The unique identifier for the related list. Always retrieve this value before using it, as the value can change from one release to the next. Simplify queries by using this field instead of making multiple queries.
FieldDefinitionId	Type string Properties Filter, Group, Nillable, Sort Description The ID of the FieldDefinition associated with the column, if applicable. This is a relationship field. Relationship Name FieldDefinition Relationship Type Lookup Refers To FieldDefinition
IsDefault	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the column appears on the related list by default (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
IsDescribable	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the related list can appear in <code>describeLayout</code> call results (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
Label	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The label for the column.
LookupId	Type string Properties Filter, Group, Nillable, Sort Description The lookup ID for the column.
RelatedListDefinitionId	Type string Properties Filter, Group, Nillable, Sort Description The ID of the RelatedListDefinition that contains the column. This is a relationship field. Relationship Name RelatedListDefinition Relationship Type Lookup Refers To RelatedListDefinition

Usage

Find all available columns on a related list definition.

```
SELECT Alias, ColumnSoql, DurableId FROM RelatedListColumnDefinition WHERE
RelatedListDefinitionId = 'Account.Opportunities'
```

RelatedListDefinition

Represents information about a related list. A related list specifies a set of records for a related object, based on specific criteria. This object is available in API version 55.0 and later.

Supported Calls

describeSObjects(), query()

Special Access Rules

This object is read-only.

Fields

Field	Details
DefaultSort	Type string Properties Filter, Group, Nillable, Sort Description The default sort string for the related list.
DurableId	Type string Properties Filter, Group, Nillable, Sort Description The unique identifier for the related list. Always retrieve this value before using it, as the value can change from one release to the next. Simplify queries by using this field instead of making multiple queries.
EntityDefinitionId	Type string Properties Filter, Group, Nillable, Sort Description The ID of the entity containing the related list. This is a relationship field. Relationship Name EntityDefinition Relationship Type Lookup Refers To EntityDefinition
IsCustomizable	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Indicates whether columns on the related list can be customized (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
IsDescribable	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the related list can appear in <code>describeLayout</code> call results (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
IsLayoutable	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the related list can be assigned to a layout (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
Label	Type string Properties Filter, Group, Nillable, Sort Description The label for the related list.
ParentEntityDefinitionId	Type string Properties Filter, Group, Nillable, Sort Description The ID of the <code>ParentEntityDefinition</code> that's associated with the rows in the related list. This is a relationship field. Relationship Name <code>ParentEntityDefinition</code> Relationship Type Lookup Refers To <code>EntityDefinition</code>

Field	Details
RelatedListId	Type string Properties Filter, Group, Nillable, Sort Description The ID of the related list.
RelatedListName	Type string Properties Filter, Group, Nillable, Sort Description The unique name of the related list in the API.

Usage

Find all available related lists for a given entity, for example, an Account record.

```
SELECT DurableId, Label, RelatedListName FROM RelatedListDefinition WHERE  
ParentEntityDefinitionId = 'Account'
```

RemoteKeyCalloutEvent

The documentation has moved to [RemoteKeyCalloutEvent](#) in the *Platform Events Developer Guide*.

Reply

Represents a reply that a user has submitted to a question in an answers zone.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Body	Type textarea

Field	Details
	Properties Create, Update Description Body of this reply.
CommunityId	Type reference Properties Filter, Group, Nillable, Sort Description The zone ID associated with the question and its reply. This field is available in API version 27.0 and later.
CreatorFullPhotoUrl	Type string Properties Filter, Group, Nillable, Sort Description URL of the user's profile photo from the feed. Chatter Answers must be enabled to view this field. This field is available in API version 26.0 and later.
CreatorName	Type string Properties Filter, Group, Nillable, Sort Description Name of the user who posted the question or reply. Only the first name of internal users (agents) appears to portal users in the feed. Chatter Answers must be enabled to view this field. This field is available in API version 26.0 and later
CreatorSmallPhotoUrl	Type string Properties Filter, Group, Nillable, Sort Description URL of the user's thumbnail photo from the feed. Chatter Answers must be enabled to view this field. This field is available in API version 26.0 and later.
DownVotes	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The total number of down votes for a reply.
Name	Type string Properties Filter, Group, idLookup, Sort Description When creating a Reply, the <code>Name</code> field is automatically populated with a truncated, plain text version of the Reply <code>Body</code> field.
NumReportAbuses	Type int Properties Filter, Group, Nillable, Sort Description Represents the number of reported abuses on the reply by users. This field is available in API version 24.0 and later.
QuestionId	Type reference Properties Create, Filter, Group, Sort Description ID of the Question to which this reply was made.
UpVotes	Type int Properties Filter, Group, Nillable, Sort Description The total number of up votes for a reply.
VoteTotal	Type double Properties Filter, Nillable, Sort Description The total number of all votes for a reply, including up and down votes.

Usage

Use this object to track replies to a Question.

ReplyEmailSettings

Represents a reply mail management configuration, which is used to configure emails that are received by an email sending domain. This object is available in API version 62.0 and later.

When you send an email campaign in Marketing Cloud, you often receive several replies to your messages, including unsubscribe requests and automatic out-of-office replies. Reply mail management (RMM) reduces the time and effort required to review these messages, and provide a better experience by automatically handling opt-outs and forwarding messages to the appropriate teams.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
AutoReplyMessage	Type textarea Properties Create, Nillable, Update Description The content of the reply message. This reply is sent when a message is received at the sending address.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. The name: • must be 40 characters or fewer • must begin with a letter • can contain only underscores and alphanumeric characters • can't include spaces • can't end with an underscore • can't contain 2 consecutive underscores

Field	Details
	In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.
DomainName	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The domain that the reply mail management settings apply to. This field is unique within your organization.
FwdEmailAddress	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The email address to forward a copy of each incoming message to. This value is honored only if the value of <code>IsEmailForwardingEnabled</code> is <code>true</code>.
IsAutoReplyEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether to forward automatic replies, such as out-of-office messages, to the address specified in the <code>FwdEmailAddress</code> field. This value is honored only if the value of <code>IsEmailForwardingEnabled</code> is <code>true</code>. The default value is <code>false</code>.
IsDeleteAutoRepliesEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether to delete automatic replies, such as out-of-office messages. This value is honored only if the value of <code>IsEmailForwardingEnabled</code> is <code>true</code>. The default value is <code>false</code>.
IsEmailForwardingEnabled	Type boolean

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether to forward email replies to the address specified in the <code>FwdEmailAddress</code> field. The default value is <code>false</code>.
<code>IsUnsubscribeManualRequestsEnabled</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether subscribers can opt out of your campaigns by replying to your email with a keyword such as <code>unsubscribe</code>. The default value is <code>false</code>.
<code>Language</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The combined language and locale ISO code, which controls the language of the <code>ReplyEmailSettings</code> object.
<code>MasterLabel</code>	Type string Properties Create, Filter, Group, Sort, Update Description The label for this <code>ReplyEmailSettings</code> value. This value is the internal label that doesn't get translated.

ReplyReportAbuse

Represents a user-reported abuse on a Reply in a Chatter Answers zone. This object is available in API version 24.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the Reply from which the user reported abuse.
Reason	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The reason the user reported abuse on the Reply, such as Spam, Hateful, or Inappropriate.
ReplyId	Type reference Properties Create, Filter, Group, Sort Description The ID of the Reply from which the user reported abuse.

Usage

Use this object to track user-reported abuse on replies created in a Chatter Answers zone.

ReplyText

A text reply generated by Einstein Reply Recommendations that is based on closed chat transcripts. Admins review replies and publish them to quick text, editing them as needed. Einstein recommends relevant published replies to support agents in the Lightning Service Console, and agents can insert replies into chats or messaging sessions. This object is available in API version 49.0 and later.



Important: Because the replies generated by Einstein are taken from closed chats with your customers, they may contain customer data. You can edit replies before they are recommended to agents.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Fields

Field	Details
Language	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The language used in the reply. This field is available in API version 51.0 and later. Possible values are languages supported in Einstein Reply Recommendations.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Eight-digit auto-generated number identifying the reply.
RawTextMessage	Type textarea Properties Description The text of the reply.
Source	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Indicates who last modified the reply. Possible values are: • <code>EINSTEIN_GENERATED</code>—Reply was generated by Einstein and has not been edited. • <code>USER_EDITED</code>—Reply was generated by Einstein and then edited by a user. • <code>USER_GENERATED</code>—This value is not currently in use.
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The status of the reply. Possible values are:

Field	Details
	• NEW—Einstein has generated the reply and it hasn't yet been published. • PUBLISHED—The reply has been published to quick text. When the reply recommendation model is activated, the reply can be recommended to support agents. • PUBLISH_FAILED— An attempt to publish the reply to quick text failed. Publishing failure can be due to validation errors, access errors, or corrupted files. To hide the reply from the list of generated replies, delete it.

Usage

To get started with Einstein Reply Recommendations, create a predictive model that analyzes closed chats for frequently used text snippets. When the model is ready, Einstein generates a list of these snippets as ReplyText records for you to review and publish, or convert, to quick text. ReplyText records appear on the Einstein Reply Recommendations Setup page.

You can select one or more replies to publish at a time. If you publish a single reply, you can edit the reply text during publishing. If you publish multiple replies at once, you can edit each reply's text on the quick text page after publishing is complete. Replies aren't recommended to support agents until you activate your reply recommendation model.

When a reply is published, a corresponding [QuickText](#) record is created. During publishing, select a quick text folder to add the replies to and make sure that agents have access to the folder. To edit a reply after it is published, edit the related quick text record.

Einstein generates the list of replies only once, when your model finishes building. It's not possible to generate a new list.

Copyright

Rights of ALBERT EINSTEIN are used with permission of The Hebrew University of Jerusalem. Represented exclusively by Greenlight.

Report

Represents a report, a set of data that meets certain criteria, displayed in an organized way. Access is read-only. This object is available in API version 20.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`, `search()`

Fields

Field	Details
Description	Type string Properties Filter, Group, Nillable, Sort Description The description of the report. Limit: 255 characters.

Field	Details
DeveloperName	Type string Properties Filter, Group, Sort Description Required. The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Label is Report Unique Name.  Note: When creating large sets of data, always specify a unique DeveloperName for each record. If no DeveloperName is specified, performance slows down while Salesforce generates one for each record.
FolderName	Type string Properties Filter, Nillable, Sort Description Name of the folder that contains the report. Available in API version 35.0 and later.
Format	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Required. Indicates the format of the report. This field is available in API version 29.0 and later. Can have one of these values: • Tabular for reports in that format. In the application, the label is <code>Tabular</code>. • Summary for reports in that format. In the application, the label is <code>Summary</code>. • Matrix for reports in that format. In the application, the label is <code>Matrix</code>. • Multiblock for reports in joined format. In the application, the label is <code>Joined</code>.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.

Field	Details
LastReferencedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastRunDate	Type dateTime Properties Filter, Nillable, Sort Description Returns the date the report was last run. Label is Last Run.
LastViewedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
Name	Type string Properties Filter, Group, idLookup, Sort Description Required. The report label used in the user interface.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values.

Field	Details
	- In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. - In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix. This field can't be accessed unless the logged-in user has the Customize Application permission.
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the folder that contains the report. There are 2 special folders: - Private, where the ID is the user ID - Public, where the ID is the org ID This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Folder, Organization, User

Supported Query Scopes

Use these scopes to help specify the data your SOQL query returns.

allPrivate

Records saved in all users' private folders.

Requires the user permission "Manage All Private Reports and Dashboards" and [Enhanced Analytics Folder Sharing](#). If your organization was created after the Summer '13 release, you already have Enhanced Analytics Folder Sharing. Available in API version 36.0 and later.

created

Records created by the user running the query.

everything

All records except records saved in other users' private folders.

mine

Records saved in the private folder of the user running the query.

organizationOwned

Records saved in Unfiled Public Reports. In Lightning Experience, the Unfiled Public Reports folder is called Public Reports.

Usage

Use the report object to get report metadata. Query, search, or retrieve specific metadata on reports. Report object fields are read-only.

Example: Reports with “Sales” in Their Name

This SOQL query returns reports that contain the name “Sales” and lists their developer names, format, ID, and report name.

```
SELECT DeveloperName,Format,Id,Name FROM Report WHERE Name LIKE '%Sales%'
```

Example: Reports in an Inactive User’s Private Folder

This SOQL query returns reports saved in a specific user’s private folder.

```
SELECT Id FROM Report USING SCOPE allPrivate WHERE OwnerId = '005A0000000Bc2deFG'
```

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

ReportFeed

Feed tracking is available for the object.

SEE ALSO:

[ReportTag](#)

[Dashboard](#)

ReportEventLog

Report event logs contain information about what happened when a user ran a report. This event type includes all activity that's in the Report Export event type, and additional information. For example, it has user activity for reports exported as both Formatted Report and Details Only output. This object is available in API version 61.0 and later.



Note: This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
AverageRowSize	Type double Properties Filter, Nillable, Sort Description The average row size of all rows in the Report event, in bytes. A large average size, coupled with a high RowCount, can indicate that a user is downloading information for fraudulent purposes. For example, a salesperson who downloads all sales leads before departing for a competitor. For example: 700.
BucketCount	Type double Properties Filter, Nillable, Sort Description The number of buckets that were used in the report.
ClientIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.
ColumnCount	Type int Properties Filter, Nillable, Sort Description The number of columns in the report.
CpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.

Field	Details
DatabaseBlocks	Type double Properties Filter, Nillable, Sort Description Indicates how much activity is occurring in the database. A high value for this field suggests that adding indexes or filters on your queries would benefit performance.
DatabaseCpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds to complete the request. Indicates the amount of activity taking place in the database layer during the request.
DatabaseTotalTime	Type double Properties Filter, Nillable, Sort Description The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and DatabaseCpuTime. Compare this field to CpuTime to determine whether performance issues are occurring in the database layer or in your own code.
DisplayType	Type string Properties Filter, Group, Nillable, Sort Description The report display type, indicating the run mode of the report. Possible values are: • D—Dashboard • S—Show Details • H—Hide Details
ExceptionFilterCount	Type double Properties Filter, Nillable, Sort

Field	Details
	Description The number of exception filters that are used in the report.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
ObjectName	Type string Properties Filter, Group, Nillable, Sort Description The name of the object referenced by the report.
Origin	Type string Properties Filter, Group, Nillable, Sort Description The context in which the report executed, such as from a UI (Classic, Lightning, Mobile), through an API (synchronous, asynchronous, Apex), or through a dashboard. Possible values are: - ReportOpenedFromMobileDashboard: Report executed when a user clicked a dashboard component on a mobile device and drilled down to a report. - DashboardComponentUpdated: Report executed when a user refreshed a dashboard component. - DashboardComponentPreviewed: Report executed from a Lightning dashboard component preview. - ReportRunUsingSynchronousApi: Report executed from a synchronous API. - ReportRunUsingAsynchronousApi: Report executed from an asynchronous API. - ReportRunUsingApexSynchronousApi: Report executed from the synchronous Apex API. - ReportRunUsingApexAsynchronousApi: Report executed from the asynchronous Apex API. - ReportExported: Report executed from a printable view or report export that was not asynchronous nor an API export.

Field	Details
	- ReportRunFromClassic: Report executed from the Run Report option of Salesforce Classic. - ReportRunFromMobile: Report executed from the Run Report option of the mobile Salesforce app. - ReportRunFromLightning: Report executed from the Run option in Lightning Experience from a non-mobile browser. - ReportRunFromRestApi: Report executed from REST API. - ReportPreviewed: Report executed when a user got preview results while using the report builder. - ReportScheduled: Report was scheduled. - ProbeQuery: Report executed from a probe query. - ReportRunFromReportingSnapshot: Report executed through Snapshot Analytics. - ReportExportedAsynchronously: Report was exported asynchronously. - ReportExportedUsingExcelConnector: Report was exported using the Excel connector. - ChartRenderedOnVisualforcePage: Report executed from a rendered chart on a VisualForce Page. - ChartRenderedInEmbeddedAnalyticsApp: Report executed from a rendered chart in an embedded Analytics app. - ReportRunAndNotificationSent: Report executed through the notifications API. - ChartRenderedOnHomePage: Report executed from a rendered chart on the home page. - ReportResultsAddedToWaveTrending: Report executed when a user trended a report in CRM Analytics. - ReportAddedToCampaign: Report was added from an Add to Campaign action. - ReportResultsAddedToEinsteinDiscovery: Report executed synchronously from Einstein Discovery. - Unknown: Report execution origin is unknown. - Test: Report execution resulted from a test.
RenderingType	Type string Properties Filter, Group, Nillable, Sort Description Describes the format of the report output in Salesforce Classic. If the report was exported in Lightning Experience, this field is blank. Possible values are: w: Web (HTML)

Field	Details
	• E: Email • P: Printable • X: Excel • C: Comma-separated values (CSV) • J: JavaScript Object Notation (JSON) • D: Dummy data
ReportIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the report that was run.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestIdentifier</code>. For example: 3nWgxWbDKWWDIk0FKfF5DV.
RequestStatus	Type String Description The status of the request for a page view or user interface action. For example: • S—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned. • F—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only. • U—Undefined • A—Authorization Error • R—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page. • N—Not Found. 404 error. This field can have a blank value.
RowCount	Type int

Field	Details
	Properties Filter, Nillable, Sort Description The number of rows that were processed in the Report event. High row counts, coupled with a high <code>AverageRowSize</code> , can indicate that a user is downloading information for fraudulent purposes. For example, a salesperson who downloads all sales leads before departing for a competitor. For example: 150.
RunTime	Type double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
SortOrder	Type string Properties Filter, Group, Nillable, Sort Description The sort column and order that was used in the report.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
Uri	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: <code>/home/home.jsp</code>.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.
UserType	Type string Properties Filter, Group, Nillable, Sort Description The category of user license. Possible values are: • CsnOnly—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users. • CspLitePortal—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site. • CustomerSuccess—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. • Guest—Users whose access is limited so that your customers can view and interact with your site without logging in. • PowerCustomerSuccess—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy. • PowerPartner—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site. • SelfService—Users whose access is limited because they're organization customers and access the application through a self-service portal. • Standard—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

ReportExportEventLog

Report Export events contain details about reports that a user exported. For example, this event type captures when a user exports a report as Details Only output. But it doesn't capture reports that users export as Formatted Report or XLSX Detail output. For that data, see the Report event type. This object is available in API version 65.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
ClientInfo	Type string Properties Filter, Group, Nillable, Sort Description Information about the client that's using Salesforce services.
ClientIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP".
CpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
LoginKey	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.
ReportDescription	Type string Properties Filter, Group, Nillable, Sort Description Information about the report that was run.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.
RunTime	Type double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nZZVD.
Timestamp	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: /home/home.jsp.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943

ReportTag

Associates a word or short phrase with a Report. This object is available in API version 20.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
ItemId	Type reference Properties Create, Filter Description ID of the tagged item.

Field Name	Details
Name	Type string Properties Create, Filter Description Name of the tag. If this value does not already exist, a new TagDefinition is created and becomes the parent of this Tag object. Otherwise, a TagDefinition with the same name becomes the parent of this Tag object. Parent relationships are created automatically.
TagDefinitionId	Type reference Properties Filter Description ID of the parent TagDefinition object that owns the tag.
Type	Type picklist Properties Create, Filter, Restricted picklist Description Defines the visibility of a tag. Valid values: • Public—The tag can be viewed and manipulated by all users in an organization. • Personal—The tag can be viewed or manipulated only by a user with a matching OwnerId.

Usage

ReportTag stores the relationship between its parent TagDefinition and the Report being tagged. Tag objects act as metadata, allowing users to describe and organize their data.

When a tag is deleted, its parent TagDefinition will also be deleted if the name is not being used; otherwise, the parent remains. Deleting a TagDefinition sends it to the Recycle Bin, along with any associated tag entries.

SEE ALSO:

[Report](#)

ReputationLevel

Represents a reputation level defined for an Experience Cloud site. This object is available in API version 32.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

This object is available only if digital experiences is enabled in your org. Only users with permissions to create or manage an Experience Cloud site can view the ReputationPointsRule records.

Fields

Field Name	Details
Label	Type string Properties Filter, Group, Nillable, Sort Description The label for the reputation level.
LevelNumber	Type int Properties Filter, Group, Sort Description The rank of the reputation level.
ParentId	Type reference Properties Filter, Group, Sort Description The ID of the parent Experience Cloud site the reputation level applies to.
Threshold	Type double Properties Filter, Sort Description The lower limit of reputation points associated with this reputation level. The maximum number of reputation points a user can accrue is 999,999,999,999,999.

ReputationLevelLocalization

Represents the translated value of a reputation level. Reputation level localization only applies for reputation levels in Experience Cloud sites. This object is available in API version 35.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

This object is available only if digital experiences is enabled in your org and reputation is enabled in your Experience Cloud site.

Fields

Field Name	Details
Language	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The language the reputation level is translated into. The picklist contains the following fully-supported languages: - Chinese (Simplified): zh_CN - Chinese (Traditional): zh_TW - Danish: da - Dutch: nl_NL - English: en_US - Finnish: fi - French: fr - German: de - Italian: it - Japanese: ja - Korean: ko - Norwegian: no - Portuguese (Brazil): pt_BR - Russian: ru - Spanish: es - Spanish (Mexico): es_MX Spanish (Mexico) defaults to Spanish for customer-defined translations.

Field Name	Details
	- Swedish: <code>sv</code> - Thai: <code>th</code> The Salesforce user interface is fully translated to Thai, but Help is in English.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. - In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. - In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
ParentId	Type reference Properties Create, Filter, Group, Sort Description The ID of the reputation level this translated value applies to.
Value	Type string Properties Create, Filter, Sort, Update Description The translated text for the reputation level. Label is Translation Text.

ReputationPointsRule

Represents the reputation point rules for an Experience Cloud site. Each rule specifies an action that members can earn points from and the points associated with those actions in a particular site. This object is available in API version 32.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

This object is available only if digital experiences is enabled in your org. Only users with permissions to create or manage an Experience Cloud site can view the ReputationPointsRule records.

Fields

Field Name	Details
ParentId	Type reference Properties Filter, Group, Sort Description The ID of the parent Experience Cloud site that the point rule applies to.
Points	Type int Properties Filter, Group, Sort Description The reputation points associated with the member action this rule is for. The maximum value this field can contain is 999,999.
Type	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The member action associated with this rule, limited to one of these actions: • Write a post (<code>FeedItemWriteAPost</code>) • Write a comment (<code>FeedItemWriteAComment</code>) • Receive a comment (<code>FeedItemReceiveAComment</code>) • Like something (<code>FeedItemLikeSomething</code>) • Receive a like (<code>FeedItemReceiveALike</code>) • Share a post (<code>FeedItemShareAPost</code>) • Someone shares your post (<code>FeedItemSomeoneSharesYourPost</code>) • Mention someone (<code>FeedItemMentionSomeone</code>) • Receive a mention (<code>FeedItemReceiveAMention</code>)

Field Name	Details
	- Ask a question (<code>FeedItemPostQuestion</code>) - Answer a question (<code>FeedItemAnswerAQuestion</code>) - Receive an answer (<code>FeedItemReceiveAnAnswer</code>) - Mark an answer as best (<code>FeedItemMarkAnswerAsBest</code>) - Someone marks your answer as best (<code>FeedItemYourAnswerMarkedBest</code>) - Endorse someone for knowledge on a topic (<code>EndorseSomeoneForKnowledgeOnATopic</code>) - Someone endorses you for knowledge on a topic (<code>EndorsedForKnowledgeOnATopic</code>) - Upload a profile picture (<code>ProfilePhotoUpload</code>) This action is available in API version 45.0 and later.

ResourceAbsence

Represents a time period in which a service resource is unavailable to work in Field Service, Salesforce Scheduler, or Workforce Engagement. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

Field Service or Workforce Engagement must be enabled.

Fields

Field Name	Details
<code>AbsenceNumber</code>	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description (Read only) An auto-generated number identifying the absence.
<code>Address</code>	Type address

Field Name	Details
	Properties Filter Description The compound form of the address associated with the absence.
City	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The city of the address associated with the absence. Maximum length is 40 characters.
Country	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The country of the address associated with the absence. Maximum length is 80 characters.
Description	Type textarea Properties Create, Nillable, Update Description The description of the absence.
End	Type dateTime Properties Create, Filter, Sort, Update Description The date and time when the absence ends.
GeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field Name	Details
	Description The level of accuracy of a location's geographical coordinates compared with its physical address. Usually provided by a geocoding service based on the address's latitude and longitude coordinates. This field is available in the API only.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the resource absence was last modified. Its label in the user interface is <code>Last Modified Date</code>.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the resource absence was last viewed.
Latitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>Longitude</code> to specify the precise geolocation of the address associated with the absence. Acceptable values are numbers between <code>-90</code> and <code>90</code> with up to 15 decimal places.  Note: This field is available in the API only.
Longitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>Latitude</code> to specify the precise geolocation of the address associated with the absence. Acceptable values are numbers between <code>-180</code> and <code>180</code> with up to 15 decimal places.  Note: This field is available in the API only.

Field Name	Details
Postal Code	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The postal code of the address associated with the absence. Maximum length is 20 characters.
ResourceId	Type reference Properties Create, Filter, Group, Sort, Update Description The absent service resource. This is a relationship field. Relationship Name Resource Relationship Type Lookup Refers To ServiceResource
Start	Type dateTime Properties Create, Filter, Sort, Update Description The date and time when the absence begins.
State	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The state of the address associated with the absence. Maximum length is 80 characters.
Street	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The street number and name of the address associated with the absence.
Type	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The type of absence: <i>Meeting</i> , <i>Training</i> , <i>Medical</i> , or <i>Vacation</i> . The default value is <i>Vacation</i> . You can add custom values if needed, but the name <i>Break</i> is reserved for the Field Service managed package.

Usage

Resource absences you define periods of time when a service resource is unavailable to work. Unless you're using the Field Service managed package, service resources can still be assigned to appointments that conflict with their absences.



Tip: Create a trigger that sends an approval request to a supervisor when a service resource creates an absence.

If you're not using the Field Service managed package, a calendar view isn't available for individual service resources.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ResourceAbsenceChangeEvent (API version 48.0)

Change events are available for the object.

ResourceAbsenceFeed

Feed tracking is available for the object.

ResourceAbsenceHistory

History is available for tracked fields of the object.

ResourcePreference

Represents an account's preference for a specified service resource on field service work.

Resource preferences indicate which service resources can be assigned to field service work. You can designate service resources as preferred, required, or excluded on specific accounts, assets, locations, work orders, or work order line items. Work orders inherit their associated account's resource preferences.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the resource preference was last modified.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the resource preference was last viewed.
PreferenceType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Resource preference type. Values include: • Preferred: Indicates that the customer would like their field service work assigned to the resource. • Required: Indicates that the resource must be assigned to the customer's field service work. • Excluded: Indicates that the customer doesn't want their field service work assigned to the resource. Resource preferences serve more as a suggestion than a requirement. You can still assign a service appointment to any resource regardless of the related work order's resource preferences.
RelatedRecordId	Type reference Properties Create, Filter, Group, Sort Description The work order or account with the resource preference.

Field Name	Details
	This field is a polymorphic relationship. Relationship Name RelatedRecord Relationship Type Lookup Refers To Accounts, Assets, Locations, Work Orders, or Work Order Line Items
ResourcePreferenceNumber	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description An auto-generated number identifying the resource preference.
ServiceResourceId	Type reference Properties Create, Filter, Group, Sort, Update Description The service resource that is preferred, required, or excluded. This is a relationship field. Relationship Name ServiceResource Relationship Type Lookup Refers To ServiceResource

Associated Objects

This object has these associated objects. Unless noted, they're available in the same API version as this object.

[ResourcePreferenceChangeEvent \(API version 54.0\)](#)

Change events are available for the object.

[ResourcePreferenceFeed](#)

Feed tracking is available for the object.

[ResourcePreferenceHistory](#)

History is available for tracked fields of the object.

RestApiEventLog

REST API event logs contain details about REST-specific requests. This object is available in API version 61.0 and later.



Note: This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
BotIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the bot.
BotSessionIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The bot session ID.
ClientIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
CpuTime	Type double Properties Filter, Nillable, Sort

Field	Details
	Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DatabaseBlocks	Type double Properties Filter, Nillable, Sort Description Indicates how much activity is occurring in the database. A high value for this field suggests that adding indexes or filters on your queries would benefit performance.
DatabaseCpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds to complete the request. Indicates the amount of activity taking place in the database layer during the request.
DatabaseTotalTime	Type double Properties Filter, Nillable, Sort Description The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and DatabaseCpuTime. Compare this field to CpuTime to determine whether performance issues are occurring in the database layer or in your own code.
ExceptionMessage	Type string Properties Filter, Nillable, Sort Description The exception message for a REST API request. An exception message gives details about errors in handling an API request, such as why an API request failed. For example: common.exception.ApiException: startDate cannot be more than 30 days ago.
FieldCount	Type double Properties Filter, Nillable, Sort

Field	Details
	Description The number of fields or columns, where applicable.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2I.
MediaType	Type string Properties Filter, Group, Nillable, Sort Description The media type of the response.
Method	Type string Properties Filter, Group, Nillable, Sort Description The HTTP method of the request. For example: GET, POST, PUT, and so on.
ObjectName	Type string Properties Filter, Group, Nillable, Sort Description The name of the object accessed by the API request. For example: Account, Opportunity, Contact, and so on.
PlannerIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the agent planner.

Field	Details
RequestIdIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestIdIdentifier</code>. For example: 3nWgxWbDKWWDIk0FKfF5DV.
RequestSize	Type double Properties Filter, Nillable, Sort Description The size of the callout response, in bytes.
RequestStatus	Type String Description The status of the request for a page view or user interface action. For example: • S—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned. • F—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only. • U—Undefined • A—Authorization Error • R—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page. • N—Not Found. 404 error. This field can have a blank value.
ResponseSize	Type double Properties Filter, Nillable, Sort Description The size of the callout response, in bytes.
RowsProcessed	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description Numbers of rows that are processed by the REST API.
RunTime	Type double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
StatusCode	Type int Properties Filter, Group, Nillable, Sort Description The HTTP response status code for the request.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: /home/home.jsp.

Field	Details
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.
UserType	Type string Properties Filter, Group, Nillable, Sort Description The category of user license. Possible values are: • CsnOnly—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users. • CspLitePortal—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site. • CustomerSuccess—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. • Guest—Users whose access is limited so that your customers can view and interact with your site without logging in. • PowerCustomerSuccess—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy. • PowerPartner—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site. • SelfService—Users whose access is limited because they're organization customers and access the application through a self-service portal. • Standard—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

RetentionStoreUsage

Represents the total usage of the org's retention store measured at specific points in time. This object is available in API version 66.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
AttributeDetail	Type textarea Properties Nillable Description (For future use) Additional metadata or contextual details about the usage measurement.
MetricType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Categorizes the type of usage being measured. Only DATA type is currently captured. • DATA: Total storage capacity usage (in bytes). • FILES: Files and attachments storage capacity usage (in bytes). • RECORDS: Retained record count (in rows). Only DATA type is currently captured.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the retention storage usage record.
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the account owner associated with the storage. This field is a polymorphic relationship field. Relationship Name Owner

Field	Details
	Refers To Group, User
RetentionType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Identifies which retention system this usage record belongs to. Possible values are: • ARCHIVE • PRIVACY_CENTER
UnitOfMeasure	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Specifies the unit of measurement for the Usage field value. Possible values are: • BYTES • ROWS
Usage	Type long Properties Filter, Group, Nillable, Sort Description The numeric usage value in the unit of measure specified in <code>UnitOfMeasure</code> .
UsageDateTime	Type dateTime Properties Filter, Nillable, Sort Description Timestamp when the usage measurement was captured.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

RetentionStoreUsageOwnerSharingRule on page 65

Sharing rules are available for the object.

RetentionStoreUsageShare on page 67

Sharing is available for the object.

ReturnOrder

Represents the return or repair of inventory or products in Field Service, or the return of order products in Order Management. This object is available in API version 42.0 and later.

Return orders are available in Lightning Experience, Salesforce Classic, the Salesforce mobile app, the Field Service mobile app for Android and iOS, and communities built using Salesforce Tabs + Visualforce.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service or Order Management must be enabled. If return orders are enabled by a Salesforce Order Management license, they must be created with a Status corresponding to the Status Category Activated. The default Statuses corresponding to Activated are Submitted and Approved.

Fields

Field Name	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The account associated with the return order. This is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account

Field Name	Details
CaseId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The case associated with the return order. This is a relationship field. Relationship Name Case Relationship Type Lookup Refers To Case
ContactId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The contact associated with the return order. This is a relationship field. Relationship Name Contact Relationship Type Lookup Refers To Contact
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. ISO code for the currency of the OrderSummary associated with the ReturnOrder. Possible values are: • DKK—Danish Krone • EUR—Euro • GBP—British Pound • USD—U.S. Dollar

Field Name	Details
	The default value is USD. This field is available in API version 49.0 and later.
Description	Type textarea Properties Create, Nillable, Update Description Notes or context about the return order.
DestinationLocationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The location where the items are being returned to. For example, if the return order tracks the return of products from a technician's van to a warehouse, the warehouse is the destination location. This is a relationship field. Relationship Name DestinationLocation Relationship Type Lookup Refers To Location
ExpectedArrivalDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date when the items are expected to arrive at the destination location.
ExpirationDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Authorizations can't be captured after their expiration dates. This field is available in API version 50.0 and later.

Field Name	Details
GrandTotalAmount	Type currency Properties Filter, Nillable, Sort Description Total, including adjustments and tax, of the products, fees, and delivery charges on the return order. This includes all return order line items associated with the return order. This amount is equal to TotalAmount + TotalTaxAmount. This is a calculated field. This field is available in API version 50.0 and later.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the return order was last modified. Its label in the user interface is <code>Last Modified Date</code>.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the return order was last viewed.
LifeCycleType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Specifies whether the order summary is managed by Salesforce Order Management (MANAGED) or by an external system (UNMANAGED). An unmanaged order summary is stored in Salesforce for reference purposes. • Some Order Management APIs reject input records that are associated with unmanaged order summaries. • Order Management does not update financial bucket fields on some records that are associated with unmanaged order summaries. • A user with the <code>EditUnmanagedOrderSummaries</code> or <code>B2BCommerceIntegrator</code> permission can edit certain fields on objects related to unmanaged order summaries that are normally only accessible via APIs. Possible values are:

Field Name	Details
	- MANAGED—Managed - UNMANAGED—Unmanaged This field is available in API version 50.0 and later.
OrderId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The order associated with the return order. When you associated a return order with an order, you can associate the return order's line items with order products. This is a relationship field. Relationship Name Order Relationship Type Lookup Refers To Order
OrderSummaryId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the order summary associated with the return order. This field is available in API version 50.0 and later.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the return order. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Field Name	Details
ProductRequestId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The product request associated with the return order. When you associated a return order with a product request, you can associate the return order's line items with the product request's line items. A return order might be related to a product request if the return order tracks the return of unused products or products to be repaired or replaced. For example, a technician creates a product request for three motors to prepare for a field visit. If the technician finds that only two motors are needed, they can create a return order to return the third to the original location, and list the product request in this field. This is a relationship field. Relationship Name ProductRequest Relationship Type Lookup Refers To ProductRequest This field is available only if Field Service or Health Cloud is enabled.
ProductServiceCampaignId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The product service campaign associated with the return order This field is available only if Field Service is enabled.
RefundInstructionsHint	Type textarea Properties Nillable Description Stores a JSON representation of the payment credit and refund sequences for ensure credit, ensure refund, and the change orders associated with it. This field is available in API version 65.0 and later.

Field Name	Details
ReturnOrderNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description (Read only) Auto-generated number identifying the return order.
ReturnedById	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the user returning the items. This is a relationship field. Relationship Name ReturnedBy Relationship Type Lookup Refers To User
ShipFromAddress	Type address Properties Filter, Nillable Description The return shipping address. This address tracks the location of the items at the start of the return or repair. For example, if a customer is returning an item, the Ship From address is the customer's address.
ShipFromCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The city of the return shipping address. This address tracks the location of the items at the start of the return or repair. For example, if a customer is returning an item, the Ship From address is the customer's address.
ShipFromCountry	Type string

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The country of the return shipping address. This address tracks the location of the items at the start of the return or repair. For example, if a customer is returning an item, the Ship From address is the customer's address.
ShipFromGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Accuracy level of the geocode for the return shipping address. See Compound Fields Considerations and Limitations for details on geolocation compound fields. This field is available in the API only.
ShipFromLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with Longitude to specify the precise geolocation of the return shipping address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places. See Compound Fields Considerations and Limitations for details on geolocation compound fields. This field is available in the API only.
ShipFromLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with Latitude to specify the precise geolocation of the return shipping address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places. See Compound Fields Considerations and Limitations for details on geolocation compound fields. This field is available in the API only.
ShipFromPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The postal code of the return shipping address. This address tracks the location of the items at the start of the return or repair. For example, if a customer is returning an item, the Ship From address is the customer's address.
ShipFromState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The state of the return shipping address. This address tracks the location of the items at the start of the return or repair. For example, if a customer is returning an item, the Ship From address is the customer's address.
ShipFromStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The street of the return shipping address. This address tracks the location of the items at the start of the return or repair. For example, if a customer is returning an item, the Ship From address is the customer's address.
ShipmentType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The type of shipment associated with the return order. Available values are: • Standard (default value) • Rush • Overnight • Next Business Day • Pick Up
SourceLocationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The items' location at the start of the return or repair. For example, if the return order tracks the return of products from a technician's service vehicle to a warehouse, the service vehicle is the source location. This is a relationship field. Relationship Name SourceLocation Relationship Type Lookup Refers To Location
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The status of the return order. Available values are: • Draft • Submitted • Approved • Canceled • Closed If return orders are enabled by a Salesforce Order Management license, they must be created with a Status corresponding to the Status Category Activated. The default Statuses corresponding to Activated are Submitted and Approved.
StatusCategory	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Status category of the return order. Processing of the return order depends on this value. Each status category corresponds to one or more statuses. Possible values are: • Activated • Canceled • Closed • Draft • Pending

Field Name	Details
	This field is available in API version 50.0 and later.
TaxLocaleType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The system used to handle tax on the original order associated with the return order. Gross usually applies to taxes like value-added tax (VAT), and Net usually applies to taxes like sales tax. Possible values are: • <code>Automatic</code> (displays most prices and taxes as combined values) • <code>Gross</code> (displays most prices and taxes as combined values) • <code>Net</code> (displays most prices and taxes as separate values) This field is available in API version 50.0 and later.
TotalAmount	Type currency Properties Filter, Nillable, Sort Description Adjusted total, not including tax, of the return order line items, including products, fees, and delivery charges, on the ReturnOrder. This is a calculated field. This field is available in API version 50.0 and later.
TotalDeliveryAdjustAmount	Type currency Properties Filter, Nillable, Sort Description Total amount of the price adjustments applied to the delivery charges on the return order. This value only includes adjustments to return order line items of type code Charge. This is a calculated field. This field is available in API version 50.0 and later.
TotalDeliveryAdjustAmtWithTax	Type currency Properties Filter, Nillable, Sort

Field Name	Details
	Description Total amount of the price adjustments applied to the delivery charges on the return order, inclusive of tax. This value only includes adjustments to return order line items of type code Charge. This amount is equal to $\text{TotalDeliveryAdjustAmount} + \text{TotalDeliveryAdjustTaxAmount}$. This is a calculated field. This field is available in API version 50.0 and later.
TotalDeliveryAdjustTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalDeliveryAdjustAmount. This is a calculated field. This field is available in API version 50.0 and later.
TotalDeliveryAmount	Type currency Properties Filter, Nillable, Sort Description Total of the delivery charges on the return order. This value only includes return order line items of type code Charge. This is a calculated field. This field is available in API version 50.0 and later.
TotalDeliveryAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Total amount of the delivery charges on the return order, inclusive of tax. This value only includes return order line items of type code Charge. This amount is equal to $\text{TotalDeliveryAmount} + \text{TotalDeliveryTaxAmount}$. This is a calculated field. This field is available in API version 50.0 and later.
TotalDeliveryTaxAmount	Type currency

Field Name	Details
	Properties Filter, Nillable, Sort Description Tax on the TotalDeliveryAmount. This is a calculated field. This field is available in API version 50.0 and later.
TotalFeeAdjustAmount	Type currency Properties Filter, Nillable, Sort Description Total amount of the price adjustments applied to the fees on the return order. This value only includes adjustments to return order line items of type Fee. This is a calculated field. This field is available in API version 56.0 and later.
TotalFeeAdjustAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Total amount of the price adjustments applied to the fees on the return order, inclusive of tax. This value only includes adjustments to return order line items of type Fee. This amount is equal to TotalFeeAdjustAmount + TotalFeeAdjustTaxAmount. This is a calculated field. This field is available in API version 56.0 and later.
TotalFeeAdjustTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalFeeAdjustAmount. This is a calculated field. This field is available in API version 56.0 and later.
TotalFeeAmount	Type currency

Field Name	Details
	Properties Filter, Nillable, Sort Description Total of the fees on the return order. This value only includes return order line items of type Fee. This is a calculated field. This field is available in API version 56.0 and later.
TotalFeeAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Total amount of the fees on the return order, inclusive of tax. This value only includes return order line items of type Fee. This amount is equal to TotalFeeAmount + TotalFeeTaxAmount. This is a calculated field. This field is available in API version 56.0 and later.
TotalFeeTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalFeeAmount. This is a calculated field. This field is available in API version 56.0 and later.
TotalProductAdjustAmount	Type currency Properties Filter, Nillable, Sort Description Total amount of the price adjustments applied to the products on the return order. This value only includes adjustments to return order line items of type code Product. This is a calculated field. This field is available in API version 50.0 and later.
TotalProductAdjustAmtWithTax	Type currency

Field Name	Details
	Properties Filter, Nillable, Sort Description Total amount of the price adjustments applied to the products on the return order, inclusive of tax. This value only includes adjustments to return order line items of type code Product. This amount is equal to TotalProductAdjustAmount + TotalProductAdjustTaxAmount. This is a calculated field. This field is available in API version 50.0 and later.
TotalProductAdjustTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalProductAdjustmentAmount. This is a calculated field. This field is available in API version 50.0 and later.
TotalProductAmount	Type currency Properties Filter, Nillable, Sort Description Total of the product charges on the return order. This value only includes return order line items of type code Product. This is a calculated field. This field is available in API version 50.0 and later.
TotalProductAmtWithTax	Type currency Properties Filter, Nillable, Sort Description Total amount of the product charges on the return order, inclusive of tax. This value only includes return order line items of type code Product. This amount is equal to TotalProductAmount + TotalProductTaxAmount. This is a calculated field. This field is available in API version 50.0 and later.

Field Name	Details
TotalProductTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalProductAmount. This is a calculated field. This field is available in API version 50.0 and later.
TotalTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalAmount. This is a calculated field. This field is available in API version 50.0 and later.

Usage

You can use return orders to track customer returns, customer repairs, or the return of inventory from a technician’s van stock to a warehouse or supplier. Customers can initiate a return from a community, or agents can create return orders in response to a customer call or technician request.

Return orders are composed of return order line items, which allow you to add details about the items being returned. To represent the returned items, each line item must list one or more of the following: product, product item, asset, product request line item, and order product. Return orders can be associated with a product request, case, account, contact, and order if needed. This versatility lets you use return orders to track a wide range of return scenarios.

Example

```
{
  "RefundInstructionsHint": {
    "PaymentCreditSequence": [
      {
        "OrderPaymentSummaryId": "0bMxx00000000000001",
        "Amount": 50,
        "CreditType": "GIFT_CARD",
        "Rank": 1
      },
      {
        "OrderPaymentSummaryId": "0bMxx00000000000002",
        "Amount": 50,
```

```
        "CreditType": "CHECK",
        "Rank": 2
      }
    ],
    },
    "RefundSequence": [
      {
        "OrderPaymentSummaryId": "0bMxx00000000000001",
        "Amount": 50,
        "Rank": 1
      },
      {
        "OrderPaymentSummaryId": "0bMxx00000000000002",
        "Amount": 50,
        "Rank": 2
      }
    ],
    "ChangeOrders": [
      {
        "ChangeOrderId": "801xx000003Gd01111",
        "FeeChangeOrderId": null,
        "NetAmount": -75
      }
    ]
  }
}
```

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ReturnOrderChangeEvent (API version 48.0)

Change events are available for the object.

ReturnOrderFeed

Feed tracking is available for the object.

ReturnOrderHistory

History is available for tracked fields of the object.

ReturnOrderOwnerSharingRule

Sharing rules are available for the object.

ReturnOrderShare

Sharing is available for the object.

ReturnOrderItemAdjustment

Represents a price adjustment on a return order line item. This object is available in API version 50.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Order Management must be enabled.

Fields

Field	Details
Amount	Type currency Properties Create, Filter, Sort Description Amount, not including tax, of the adjustment.
Description	Type textarea Properties Create, Nillable, Update Description Description of the adjustment.
OrderItemAdjustLineSummaryId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the order item adjustment line summary associated with the adjustment.
ReturnOrderId	Type reference Properties Create, Filter, Group, Sort Description ID of the return order associated with the return order line item to which the adjustment applies. This is a relationship field. Relationship Name ReturnOrder

Field	Details
	Relationship Type Lookup
	Refers To ReturnOrder
ReturnOrderItemAdjustmentNumber	Type string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description ID of the return order item adjustment.
ReturnOrderLineItemId	Type reference
	Properties Create, Filter, Group, Sort
	Description ID of the return order line item to which this adjustment applies. This is a relationship field.
	Relationship Name ReturnOrderLineItem
	Relationship Type Lookup
	Refers To ReturnOrderLineItem
TotalAmtWithTax	Type currency
	Properties Filter, Nillable, Sort
	Description Total amount of the adjustment, inclusive of tax. This amount is equal to Amount + TotalTaxAmount.
TotalTaxAmount	Type currency
	Properties Filter, Nillable, Sort
	Description Tax on the Amount.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ReturnOrderItemAdjustmentChangeEvent (API version 62.0)

Change events are available for the object.

ReturnOrderItemTax

Represents the tax on a return order line item or return order item adjustment. This object is available in API version 50.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Order Management must be enabled.

Fields

Field	Details
Amount	Type currency Properties Create, Filter, Sort Description Amount of tax represented by the return order item tax.
Description	Type textarea Properties Create, Nillable, Update Description Description of the return order item tax.
OrderItemTaxLineItemSummaryId	Type reference Properties Create, Filter, Group, Nillable, Sort

Field	Details
	Description ID of the order item tax line item summary associated with the order item summary that corresponds to the return order line item to which the tax applies.
Rate	Type percent Properties Filter, Nillable, Sort Description Tax rate used to calculate the Amount.
ReturnOrderId	Type reference Properties Create, Filter, Group, Sort Description ID of the associated return order. This is a relationship field. Relationship Name ReturnOrder Relationship Type Lookup Refers To ReturnOrder
ReturnOrderItemAdjustmentId	Type reference Properties Create, Filter, Group, Nillable, Sort Description If this object represents a tax on an adjustment, this value is the ID of the return order item adjustment to which the tax applies. If this value is null, the adjustment applies to a return order line item. This is a relationship field. Relationship Name ReturnOrderItemAdjustment Relationship Type Lookup Refers To ReturnOrderItemAdjustment

Field	Details
ReturnOrderItemTaxNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description ID of the return order item tax.
ReturnOrderLineItemId	Type reference Properties Create, Filter, Group, Sort Description If this object represents a tax on a return order line item, this value is the ID of that return order line item. If this object represents a tax on an adjustment, this value is the ID of the return order line item to which the adjustment applies. This is a relationship field. Relationship Name ReturnOrderLineItem Relationship Type Lookup Refers To ReturnOrderLineItem
TaxEffectiveDate	Type date Properties Filter, Group, Nillable, Sort Description Date on which the Amount was calculated. Important due to tax rate changes over time.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Shows whether the amount on the tax line is an estimate or the final calculated amount. Doesn't set a value by default. Users can define automation to set and change the value as needed. Possible values are: • Actual • Estimated

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ReturnOrderItemTaxChangeEvent](#) (API version 62.0)

Change events are available for the object.

ReturnOrderLineItem

Represents a specific product that is returned or repaired as part of a return order in Field service, or a specific order item that is returned as part of a return order in Order Management. This object is available in API version 42.0 and later.

Return orders are available in Lightning Experience, Salesforce Classic, the Salesforce mobile app, the Field Service mobile app for Android and iOS, and communities built using Salesforce Tabs + Visualforce.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service or Order Management must be enabled.

Fields

Field Name	Details
AssetId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The asset associated with the return order line item. One or more of the following fields must be filled out: AssetId, OrderItemId, Product2Id, ProductItemId, and ProductRequestLineItemId. This is a relationship field. Relationship Name Asset Relationship Type Lookup Refers To Asset

Field Name	Details
ChangeOrderItemId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the change order item associated with the return order line item. This field is available in API version 50.0 and later. This is a relationship field. Relationship Name ChangeOrderItem Relationship Type Lookup Refers To OrderItem
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for the currency of the original Order associated with the ReturnOrderLineItem. Possible values are: • DKK—Danish Krone • EUR—Euro • GBP—British Pound • USD—U.S. Dollar The default value is USD. This field is available in API version 49.0 and later.
Description	Type textarea Properties Create, Nillable, Update Description Notes or context about the return order line item.
DestinationLocationId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The location where the items are being returned to. For example, if the return order tracks the return of products from a technician's van to a warehouse, the warehouse is the destination location. This is a relationship field. Relationship Name DestinationLocation Relationship Type Lookup Refers To Location
GrossUnitPrice	Type currency Properties Create, Filter, Nillable, Sort, Update Description Unit price, including tax, of the product represented by the associated order item summary. This field is available in API version 50.0 and later.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the return order line item was last modified. Its label in the user interface is <code>Last Modified Date</code>.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the return order line item was last viewed.
OrderItemId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The order product associated with the return order line item. One or more of the following fields must be filled out: AssetId, OrderItemId, Product2Id, ProductItemId, and ProductRequestLineItemId. This is a relationship field. Relationship Name OrderItem Relationship Type Lookup Refers To OrderItem
OrderItemSummaryId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the order item summary associated with the return order line item. This field is available in API version 50.0 and later.
ProcessingPlan	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Indicates the preferred fate of the items following their return. Available values are: • Repair—Repair the items and return them to the owner • Discard—Discard the items • Salvage—Salvage the items' working parts • Restock—Return the items to your inventory
Product2Id	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The product associated with the return order line item. One or more of the following fields must be filled out: AssetId, OrderItemId, Product2Id, ProductItemId, and ProductRequestLineItemId. This is a relationship field. Relationship Name Product2 Relationship Type Lookup Refers To Product2
ProductItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The product item representing the location of the product at the start of the return. One or more of the following fields must be filled out: AssetId, OrderItemId, Product2Id, ProductItemId, and ProductRequestLineItemId. This is a relationship field. Relationship Name ProductItem Relationship Type Lookup Refers To ProductItem
ProductRequestLineItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The product request line item associated with the return order line item. One or more of the following fields must be filled out: AssetId, OrderItemId, Product2Id, ProductItemId, and ProductRequestLineItemId. This is a relationship field. Relationship Name ProductRequestLineItem Relationship Type Lookup

Field Name	Details
	Refers To ProductRequestLineItem
ProductServiceCampaignId	Type reference Properties Filter, Group, Nillable, Sort Description The product service campaign associated with the return order line item.
ProductServiceCampaignItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The product service campaign item associated with the return order line item.
QuantityExpected	Type double Properties Create, Filter, Nillable, Sort, Update Description The quantity of items expected to be returned. This field is available in API version 50.0 and later.
QuantityReceived	Type double Properties Create, Filter, Nillable, Sort, Update Description The actual quantity of items received for return. This field is available in API version 50.0 and later.
QuantityRejected	Type double Properties Create, Filter, Nillable, Sort, Update Description The quantity of items rejected for return. This field is available in API version 50.0 and later.

Field Name	Details
QuantityReturned	Type double Properties Create, Filter, Sort, Update Description The quantity of items being returned. If multiple types of products are being returned, track each product in a different return order line item.
QuantityUnitOfMeasure	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Units of the returned items; for example, kilograms or liters. Quantity Unit of Measure picklist values are inherited from the Quantity Unit of Measure field on products.
ReasonForRejection	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Reason for rejecting returned items on this return order line item. Possible values are: • Damaged Item • Expired Warranty • Missing Item or Part • Wrong Item The default value is Missing Item or Part. This field is available in API version 50.0 and later.
ReasonForReturn	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The reason the items are being returned. Available values are: • Damaged • Defective • Duplicate Order

Field Name	Details
	• Wrong Item • Wrong Quantity • Not Satisfied • Outdated • Other The default value is Damaged.
ReasonForChangeText	Type string Properties Filter, Group, Sort Description Details about the reason for return change
RepaymentMethod	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The method by which the customer or owner will be reimbursed for the items being returned. Available values are: • Replace—The items will be replaced • Refund—The items will be returned and the owner will be refunded • Credit—The items will be returned and the owner will receive credit for them • Return—The items will be returned to the owner (for example, following their repair)
ReturnOrderId	Type reference Properties Create, Filter, Group, Sort Description The return order that the return order line item belongs to. This is a relationship field. Relationship Name ReturnOrder Relationship Type Lookup Refers To ReturnOrder

Field Name	Details
ReturnOrderLineItemNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description (Read only) Auto-generated number that identifies the return order line item.
SourceLocationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The items' location at the start of the return or repair. For example, if the return order tracks the return of products from a technician's service vehicle to a warehouse, the service vehicle is the source location. This is a relationship field. Relationship Name SourceLocation Relationship Type Lookup Refers To Location
TotalAdjustmentAmount	Type currency Properties Filter, Nillable, Sort Description Total of all price adjustments applied to the return order line item. This is a calculated field. This field is available in API version 50.0 and later.
TotalAdjustmentAmountWithTax	Type currency Properties Filter, Nillable, Sort Description Total amount of the price adjustments applied to the return order line item, inclusive of tax. This amount is equal to TotalAdjustmentAmount + TotalAdjustmentTaxAmount. This is a calculated field.

Field Name	Details
	This field is available in API version 50.0 and later.
TotalAdjustmentTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalAdjustmentAmount. This is a calculated field. This field is available in API version 50.0 and later.
TotalAmount	Type currency Properties Filter, Nillable, Sort Description Total, including adjustments and tax, of the return order line item. This is a calculated field. This field is available in API version 50.0 and later.
TotalLineAmount	Type currency Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description Total, not including adjustments or tax, of the return order line item. This field is available in API version 50.0 and later.
TotalLineAmountWithTax	Type currency Properties Filter, Nillable, Sort Description Total price of the return order line item, inclusive of tax. This amount is equal to TotalLineAmount + TotalLineTaxAmount. This is a calculated field. This field is available in API version 50.0 and later.
TotalLineTaxAmount	Type currency

Field Name	Details
	Properties Filter, Nillable, Sort Description Tax on the TotalLineAmount. This is a calculated field. This field is available in API version 50.0 and later.
TotalPrice	Type currency Properties Filter, Nillable, Sort Description Total, including adjustments but not tax, of the return order line item. Equal to UnitPrice times Quantity. This is a calculated field.
TotalTaxAmount	Type currency Properties Filter, Nillable, Sort Description Tax on the TotalAmount. This is a calculated field. This field is available in API version 50.0 and later.
Type	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Type of the return order line item. Matches the type of the associated order item summary. Delivery Charge indicates that the return order line item represents a delivery charge. Fee indicates that it represents another type of fee, such as a return fee. Order Product indicates that it represents any other type of product, service, or charge. Each type corresponds to one type code, shown here in parentheses. Possible values are: • <code>Delivery Charge (Charge)</code> • <code>Fee (Charge)</code> This value is available in API v56.0 and later. • <code>Order Product (Product)</code>

Field Name	Details
	This field is available in API version 50.0 and later.
TypeCode	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Type code of the return order line item. Matches the type code of the associated order item summary. Processing depends on this value. Charge indicates that the return order line item represents a delivery charge. Product indicates that it represents an other type of product, service, or charge. Each type category corresponds to one or more types. Possible values are: • Charge • Product This field is available in API version 50.0 and later.
UnitPrice	Type currency Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description Unit price of the return order line item. This field is available in API version 50.0 and later.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ReturnOrderLineItemChangeEvent](#) (API version 48.0)

Change events are available for the object.

[ReturnOrderLineItemFeed](#)

Feed tracking is available for the object.

[ReturnOrderLineItemHistory](#)

History is available for tracked fields of the object.

ReturnOrderOwnerSharingRule

Represents the rules for sharing a return order with user records other than the owner or anyone above the owner in the role hierarchy. This object is available in API version 42.0 and later.

 **Note:** To enable access to this object for your org, contact Salesforce customer support. However, we recommend that you instead use Metadata API to programmatically update owner sharing rules because it triggers automatic sharing rule recalculation. The [SharingRules](#) Metadata API type is enabled for all orgs.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description A description of the sharing rule. Maximum size is 1000 characters.
DeveloperName	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Corresponds to Rule Name in the user interface.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
GroupId	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description The ID representing the source group. A return order owned by a User in the source Group triggers the rule to give access.
Name	Type string Properties Create, Filter, Group, Sort, Update Description Label of the sharing rule as it appears in the user interface. Limited to 80 characters. Corresponds to Label on the user interface.
ServiceResourceAccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A value that represents the type of access granted to the target Group, or UserRole. The possible values are: • Read • Edit • All
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the User or Group being granted access.

RevenueAsyncOperation

Represents the status of an asynchronous process initiated by a REST request in Subscription Management. This object is available in API versions 57.0 to 59.0. Use AsyncOperationTracker instead of RevenueSyncOperation in API version 59.0 and later.

For example, `asset-management/assets/collection/actions/initiate-amend-quantity` creates a RevenueAsyncOperation record when it initiates an asynchronous process. The ID of the record is returned in the REST response.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is available with Subscription Management.

Fields

Field	Details
AsyncOperationNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description A unique identifier for this revenue async operation record.
CorrelationIdentifier	Type string Properties Filter, Group, Nillable, Sort Description A unique identifier for the API request associated with this revenue async operation.
ExpiresAt	Type dateTime Properties Filter, Nillable, Sort Description The timestamp indicating when this record will be deleted.
FailedJobItems	Type integer Properties Filter, Group, Nillable, Sort Description The number of items that weren't successfully processed by the sync operation.
FinishedAt	Type dateTime Properties Filter, Nillable, Sort Description The timestamp indicating when the asynchronous process was completed.

Field	Details
JobType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The REST request that initiated the asynchronous process. Valid values are: • ASMAAdServerCheckAvailability • ASMAAdServerIntegration • ASMAApplyMediaPlanTemplateJob • ASMAApplyTargetingTemplateJob • ASMCreateAmendQuoteJob • ASMMediaPlanAsTemplate • ASMMediaPlanClone • ASMMediaPlanCopyJob • AssetizationAsyncJob • AutomatedNegativeInvoiceLineConversion • AutomaticRefunds • CommerceVariationsUpsert • ContextPersistence • CreateCPQContractsJob • DeltaCatalogSyndicationAsyncJob • FullCatalogSyndicationAsyncJob • InvoicedDocgenJob • InvoicedDocgenPostProcessJob • InvoicedDocfenRetryJob • InvoiceDraftToPosted • InvoiceEstimatedTaxCallout • PST Base Job - Top-Level • PSTConfig - Configuration • PSTPersist - Save • PSTPrice - Price • PearAmendQtyAssets • PearCancelAssets • PearRenewAssets • PlaceOrder • PlaceOrderPersistSync • PlaceOrderPriceAsync

Field	Details
	- PlaceOrderTaxAsync - PlaceQuote - PlaceQuotePersistAndPriceSync - PlaceQuotePersistSync - PlaceQuotePriceAsync - PlaceQuoteTaxAsync - PriceRuleDeployment - PriceSheetDeployJob - QuoteToOrderJob - RuleLibraryDeployment - StandaloneBillingSchedulesCreation - TestSerialMessageStepJob - TransactionLineBom
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
ParentOperationId	Type reference Properties Filter, Group, Nillable, Sort Description Reserved for future use. This field is a relationship field. Relationship Name ParentOperation

Field	Details
	Relationship Type Lookup
	Refers To RevenueAsyncOperation
ReferenceEntityId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description Contains the ID of a record associated with the asynchronous request. For example, if the asynchronous request is associated with a credit memo, this field contains the ID of the credit memo. This field is a polymorphic field.
	Relationship Name ReferenceEntity
	Relationship Type Lookup
	Refers To CreditMemo, Order, Product2, Quote
StartedAt	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp indicating when Salesforce started the asynchronous process.
Status	Type picklist
	Properties Filter, Group, Restricted picklist, Sort
	Description The status of the asynchronous process. Possible values are: - Completed - CompletedWithFailures - Failure - InProgress - Submitted

Field	Details
SubmittedAt	Type dateTime Properties Filter, Nillable, Sort Description The timestamp indicating when the asynchronous process was submitted by the REST request.
SuccessfulJobItems	Type integer Properties Filter, Group, Nillable, Sort Description The number of items successfully processed by the sync operation.
TotalJobItems	Type integer Properties Filter, Group, Nillable, Sort Description The total number of items processed by the sync operation, including both successfully processed items and failed items.

RevenueTransactionErrorLog

Contains information about errors that occurred while processing a request. The error record persists until another error with the same category, primary record, and (optionally) related record occurs. This object is available in API version 55.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
AsyncOperationTrackerId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the async operation tracker record created by the request. Async operation tracker records contain information about the status of the asynchronous process initiated by the request. This field is available in API version 60.0 and later. This field is a relationship field. Relationship Name AsyncOperationTracker Relationship Type Lookup Refers To AsyncOperationTracker
Category	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Provides context about the source of error. For example, if an error occurs while processing an <code>/assets/collection/actions/initiate-cancellation</code> request, the category is <code>InitiateCancel</code>. Possible values are: • <code>ApplyAPI</code> • <code>AutomatedNegativeInvoiceLineConversion</code> • <code>AutomaticRefunds</code> • <code>ConvertNegativeInvoiceLineToCredit</code>—available in API version 56.0 and later • <code>Core Invoice Generation Failure</code> • <code>CreditInvoiceAPI</code> • <code>CreditTaxIntegrationAPI</code> • <code>InitiateAmendment</code>—available in API version 56.0 and later • <code>InitiateCancel</code> • <code>InitiateRenewal</code> • <code>InsufficientAccess</code>—Insufficient Access to start Invoice run • <code>InvoiceBatchRun</code>

Field	Details
	• InvoiceBatchRunInvoiceGeneration • InvoiceBatchRunPostProcessor • InvoiceBatchRunPreProcessor • InvoiceBatchRunRecovery • InvoiceBatchRunSelectionStep • InvoiceBatchRunSummarizer • InvoiceBatchRunTaxProcessor • MaterialLineGeneration—available in API version 58.0 and later • Invalid Tax API Input • Invalid Tax Integration Input • OrderTaxCalculationFailure—available in API version 61.0 and later of Revenue Cloud. • OrderToAsset • OrderItemToAsset—available in API version 59.0 and later • OrderToBillingSchedule • PaymentSale • PaymentScheduleGeneration—available in API version 56.0 and later • QuotePriceCalculationFailure—available in API version 61.0 and later of Revenue Cloud. • QuoteTaxCalculationFailure—available in API version 61.0 and later of Revenue Cloud. • QuoteToOrder—available in API version 56.0 and later • Post Tax API Failure • Post-Credit Tax Failure • Pre-Credit Tax Failure • StandaloneCreditAPI • Tax API Failure • TransactionToContract—available in API version 59.0 and later • Unknown Failure—available in API version 56.0 and later • VoidPostedInvoiceAPI
ErrorCode	Type string Properties Filter, Group, Nillable, Sort Description The error code; for example, INVALID_INPUT.
ErrorLogNumber	Type string

Field	Details
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-generated unique ID that identifies the error.
ErrorMessage	Type textarea Description Contains information about the error and how to resolve it.
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the user who made the request that resulted in the creation of the error log. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PrimaryRecordId	Type reference Properties Filter, Group, Sort Description The ID of the record that's associated with this error. For example, if the error occurred while creating an invoice from an order, the primary ID is the ID of the order. This field is a polymorphic relationship field. Relationship Name PrimaryRecord Relationship Type Lookup Refers To Asset, BillingBatchScheduler, BillingSchedule, CardPaymentMethod, CreditMemo, Invoice, InvoiceBatchRun, InvoiceBatchRunRecovery, Order, Payment, PaymentBatchRun, PaymentGateway, Quote, Refund

Field	Details
RelatedRecordId	Type reference Properties Filter, Group, Nillable, Sort Description Optional. The ID of a record that can provide additional context about the error. For example, if <code>PrimaryRecordId</code> is the ID of an order, this field could be the ID of an order item. This field is a polymorphic relationship field. Relationship Name RelatedRecord Relationship Type Lookup Refers To BillingBatchScheduler, BillingSchedule, BillingScheduleGroup, CreditMemo, CreditMemoLine, Invoice, InvoiceLine, OrderItem, Payment, PaymentSchedule, PaymentScheduleItem, QuoteLineItem, Refund
RequestIdIdentifier	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The unique ID returned by the request. Use this ID to identify the revenue transaction error log records for a specific request. This field is available in API version 57.0 and later.
RevenueAsyncOperationId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the revenue async operation record created by the request. Revenue async operation records contain information about the status of the asynchronous process initiated by the request. This field is available in API version 57.0 and later. This field is a relationship field. Relationship Name RevenueAsyncOperation Relationship Type Lookup Refers To RevenueAsyncOperation

RpaFlowResultEvent

Reserved for future use.

RpaRobot

Reserved for future use.

RpaRobotAsgnMaintWindow

Reserved for future use.

RpaRobotAsgnSessionInf

Reserved for future use.

RpaRobotDefinition

Reserved for future use.

RpaRobotMaintWindow

Reserved for future use.

RpaRobotMaintWindowDef

Reserved for future use.

RpaRobotPool

Reserved for future use.

RpaRobotPoolAsgnRobot

Reserved for future use.

RpaRobotPoolDefinition

Reserved for future use.

RpaRobotPoolFlowAsgn

Reserved for future use.

RpaRobotSessionInfo

Reserved for future use.

RpaRobotSessionInfoDef

Reserved for future use.

RuleTerritory2Association

Represents a record-assignment rule and its association to an object, such as Account. Available if Sales Territories has been enabled.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Standard users can access this object. If a territory model is in `Active` state, any standard user can view that model, including its territories and assignment rules. For territories in an active model, any standard user can view assigned records and assigned users subject to your Salesforce sharing settings. Users cannot view territory models in other states (such as `Planning` or `Archived`).

Fields

Field Name	Details
IsInherited	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Indicates whether the rule is an <i>inherited</i> rule (<code>true</code>) or a <i>local</i> rule (<code>false</code>). Rule inheritance flows from the parent territory where the rule is created to the rule's descendent territories (if any) in the territory model hierarchy. A local rule is created within a single territory and affects that territory only.
RuleId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Sort Description The ID of the rule.
Territory2Id	Type reference Properties Create, Filter, Group, Sort Description The ID of the territory where the rule was created.

SalesAIScoreCycle

Represents the cycle type and ID used to score records. This object is available in API version 47.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

To see score cycle information, users need a Sales Cloud Einstein license with the View Scoring Model Factors permission enabled. The permission isn't enabled by default. As of the Spring '20 release, Pardot and Sales Engagement users no longer have access to this object.

Fields

Field	Details
CycleType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The cycle used to create scores on opportunity records can be one of two types. • <code>OpportunityScoreModeling</code>—Provides model factors, which Sales Cloud Einstein uses to build a scoring model. • <code>OpportunityScoreScoring</code>—Provides scores and key factors to individual records, which are based on Sales Cloud Einstein's scoring model.

Field	Details
	 Note: When the value <code>OpportunityScoreModeling</code> is returned, use the Sales AI Score Model Factor object to get information about the model factors.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The ID of the cycle. Currently, the name is a system-generated unique value.

SalesAIScoreModelFactor

Represents the factors that Sales Cloud Einstein uses to build a scoring model. Scoring models are used by features, such as Opportunity Scoring, to score individual records. This object is available in API version 47.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

To see model factor information, users need a Sales Cloud Einstein license with the “View Scoring Model Factors” permission enabled. The permission isn’t enabled by default. As of the Spring ’20 release, Pardot and Sales Engagement users no longer have access to this object.

Fields

Field	Details
Factor	Type picklist Properties Filter, Group, Restricted picklist, Sort Description A factor that contributes to a scoring model. For example, a factor could indicate that an amount increase has a positive effect on an opportunity score (<code>AmountIncreasePositive</code>). Or, it could indicate that a change to the close date has a negative effect on an opportunity score (<code>CloseDateChangeNegative</code>).
FactorSummaryOrgLanguage	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description Describes the factor in English. For example, the factor field value AmountChangePositive is summarized as "Amount change has positive effect".
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The ID of the model factor. Currently, the name is a system-generated value.
OperatorType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The operator used to analyze field values. For example, the factor HighSuccessLeadSource uses the Lead Source field as the primary source field. When building the scoring model, Einstein uses the Equals operator to determine <code>PrimarySourceFieldValue = Internet</code>. The other supported operator is <code>IsNull</code>.
PrimarySourceFieldName	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The name of the primary field used in the model factor. For example, the factor HighSuccessIndustry uses the account's Industry as the primary field.
PrimarySourceFieldValue	Type string Properties Filter, Group, Nillable, Sort Description Information used to retrieve the PrimarySourceFieldValueText, such as a record ID or value.
PrimarySourceFieldValueText	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The value of the primary source field used in the model factor. For example, the factor HighSuccessIndustry uses the account's Industry as the primary field, and the value of the Industry field is manufacturing.  Note: This field's value is retrieved from the <code>PrimarySourceFieldValue</code> field. If the <code>PrimarySourceFieldValue</code> field is a record ID, then <code>PrimarySourceFieldValueText</code> returns the name of the record. If <code>OperatorType</code> returns <code>isNull</code>, then <code>PrimarySourceFieldValue</code> returns <code>true</code> and <code>PrimarySourceFieldValueText</code> returns <code>null</code>.
SalesAiScoreCycleId	Type reference Properties Filter, Group, Sort Description The ID of the score cycle used to generate model factors. Each score cycle can have multiple model factors associated to it.
ScoreCorrelation	Type double Properties Filter, Nillable, Sort Description The strength between a model factor and a score. If score correlation value is closer to +1, it's more likely that the model factor contributing toward a high score. If score correlation value is closer to -1, it's more likely that the model factor is contributing toward a low score.
SecondarySourceFieldName	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The name of the secondary field used in the model factor. For example, the factor HighAmountActivity uses Task as the primary field and Event as the secondary field. Not all model factors use a secondary source field.
SecondarySourceFieldValue	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description Information used to retrieve the <code>SecondarySourceFieldValueText</code>, such as a record ID or value. Not all model factors use a secondary source field. This field is available in API version 50.0 and later.
<code>SecondarySourceFieldValueText</code>	Type string Properties Filter, Group, Nillable, Sort Description When the model factor is based on two source fields, this field represents the value of the secondary source field. For example, the factor <code>HighSuccessMultipleSameFieldValue</code> might use the opportunity's related product as the primary field and pricebook as the secondary field. The product and pricebook names are indicated by the <code>PrimarySourceFieldValueText</code> and <code>SecondarySourceFieldValueText</code>, respectively. Not all model factors use a secondary source field. This field is available in API version 50.0 and later.  Note: This field's value is retrieved from the <code>SecondarySourceFieldValue</code> field. If the <code>SecondarySourceFieldValue</code> field is a record ID, then <code>SecondarySourceFieldValueText</code> returns the name of the record. If <code>OperatorType</code> returns <code>isNull</code>, then <code>SecondarySourceFieldValue</code> returns <code>true</code> and <code>SecondarySourceFieldValueText</code> returns <code>null</code>.
<code>Status</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Determines whether the model factor is active or inactive.

Usage

Use the `SalesAIScoreModelFactor` object to run a query that retrieves the latest highest influencing model factors.

```
SELECT Id,Factor,ScoreCorrelation,FactorSummaryOrgLanguage
FROM SalesAIScoreModelFactor
WHERE Status='Active' and SalesAIScoreCycle.CycleType='OpportunityScoreModeling'
ORDER BY ScoreCorrelation desc
```

SalesforceLoginAsEventLog

Salesforce LoginAs Event provides details about the Salesforce User's login into Customer Org as Customer's authorized user. This object is available in API version 65.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
<code>ActualUserIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The actual user's identifier.
<code>CaseIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The Salesforce case ID.
<code>IpAddress</code>	Type string Properties Filter, Group, Nillable, Sort Description IP address of the browser.
<code>OperationType</code>	Type string Properties Filter, Group, Nillable, Sort Description The type of operation. For example, login or logout.
<code>RequestIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example: 20130715233322.670.

SalesChannel

Represents the origin of an order. For example, a web storefront, physical store, marketplace, or mobile app. If you integrate Salesforce Order Management with Salesforce B2C Commerce, set up a SalesChannel corresponding to each Site in your B2C Commerce implementation. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is only available in Salesforce Order Management orgs.

Fields

Field	Details
Description	Type textarea Properties Create, Nillable, Update Description Description of the SalesChannel.
ExternalChannelNumber	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description External system identifier for the SalesChannel.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. A null value can mean that this record has only been referenced (LastReferencedDate) and not viewed.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who currently owns this SalesChannel. Default value is the user logged in to the API to perform the create.
SalesChannelName	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the SalesChannel.
Type	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Type of the SalesChannel. Each Type corresponds to one Type Category. You can customize the Type picklist to represent your business processes, but the Type Category picklist is fixed

Field	Details
	because some order processing is based on those values. If you customize the Type picklist, include at least one value for each Type Category. This field is available in API version 53.0 and later. Default values are: • B2B • B2C • Other
TypeCategory	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Type Category of the SalesChannel. Each Type Category corresponds to one or more Types. This field isn't visible in the UI. This field is available in API version 53.0 and later. Possible values are: • B2B • B2C • Other

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[SalesChannelChangeEvent](#) (API version 62.0)

Change events are available for the object.

[SalesChannelShare](#) on page 67 (API version 66.0)

Sharing is available for the object.

SEE ALSO:

[Order](#)

[OrderSummary](#)

SalesforceContract

Read-only virtual object used in the Your Account App. Represents contract information related to your organization's Salesforce subscription.

Supported Calls

`describeLayout()`, `describeSObjects()`, `query()`

Fields

Field	Details
AutoRenewCode	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Determines if contract renews automatically Possible values are: • No • Yes
BillingAddressCity	Type string Properties Filter, Group, Nillable, Sort Description Details for the billing address. Maximum size is 40 characters.
BillingAddressCountry	Type string Properties Filter, Group, Nillable, Sort Description Details for the billing address of this contract. Maximum size is 80 characters.
BillingAddressPostalCode	Type string Properties Filter, Group, Nillable, Sort Description Details for the billing address of this contract. Maximum size is 20 characters.
BillingAddressState	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description Details for the billing address of this contract. Maximum size is 80 characters.
BillingAddressStreet	Type string Properties Filter, Group, Nillable, Sort Description Street address for the billing address of this contract.
BillingCompany	Type string Properties Filter, Group, Nillable, Sort Description Name of the billing company.
BillingEmail	Type email Properties Filter, Group, Nillable, Sort Description Email address for billing this contract.
BillingFrequency	Type string Properties Filter, Group, Nillable, Sort Description Define billing periods.
BillingName	Type string Properties Filter, Group, Nillable, Sort Description Contact name for this contract.
BillingPhone	Type phone Properties Filter, Group, Nillable, Sort

Field	Details
	Description Phone number for billing this contract.
ContractId	Type string Properties Filter, Group, Nillable, Sort Description ID for this contract.
ContractNumber	Type string Properties Filter, Group, idLookup, Nillable, Sort Description Number of the contract.
CreditCardExpirationMonth	Type string Properties Filter, Group, Nillable, Sort Description Month the credit card expires.
CreditCardExpirationYear	Type string Properties Filter, Group, Nillable, Sort Description Year the credit card expires.
CreditCardNumber	Type string Properties Filter, Group, Nillable, Sort Description 16-digit credit card number.
CreditCardType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description Credit card provider. Possible values are: • AmericanExpress— • JCB • MasterCard • Visa
EndDate	Type date Properties Filter, Group, Nillable, Sort Description End date of the contract.
ExternalId	Type string Properties Filter, Group, Nillable, Sort Description External reference ID set by Salesforce.
FirstNameOnCreditCard	Type string Properties Filter, Group, Nillable, Sort Description Cardholder's first name on the credit card.
LastNameOnCreditCard	Type string Properties Filter, Group, Nillable, Sort Description Cardholder's last name on the credit card.
PaymentTerm	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field	Details
	Description Payment terms definition. Possible values are: • Net0—Due upon receipt • Net10—DD-Germany: Net 10 • Net30— • Net30EOM—JP-Net 30 EOM • Net45— • Net60— • Net60EOM—JP-Net 60 EOM
PaymentType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Payment type definition. Possible values are: • Check • CreditCard— • DirectDebit— • WireTransfer—
SalesforceContractStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The status of the contract Possible values are: • Activated • Draft • Expired • Terminated • inApproval—
ShippingAddressCity	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description Details of the shipping address. City maximum size is 40 characters.
ShippingAddressCountry	Type string Properties Filter, Group, Nillable, Sort Description Details of the shipping address. Country maximum size is 80 characters.
ShippingAddressPostalCode	Type string Properties Filter, Group, Nillable, Sort Description Details of the shipping address. Postal code maximum size is 20 characters.
ShippingAddressState	Type string Properties Filter, Group, Nillable, Sort Description Details of the shipping address. State maximum size is 80 characters.
ShippingAddressStreet	Type string Properties Filter, Group, Nillable, Sort Description The street address of the shipping address. Maximum of 255 characters.
StartDate	Type date Properties Filter, Group, Nillable, Sort Description Start date of the contract.
SubscriptionDaysLeft	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort
	Description Days remaining for this subscription.

Usage

Used by Your Account to manage contracts related to your organization's Salesforce subscription. Read-only.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[SalesforceInvoice](#)

[SalesforcePayment](#)

[SalesforceQuote](#)

SalesforceInvoice

Read-only virtual object used in the Your Account App. Represents information about your organization's invoices with Salesforce.

Supported Calls

`describeLayout()`, `describeSObjects()`, `query()`

Fields

Field	Details
Balance	Type double Properties Filter, Nillable, Sort Description The outstanding balance for this invoice. Equal to the invoice's total amount with tax, ignoring payments and adjustments.
DueDate	Type date

Field	Details
	Properties Filter, Group, Nillable, Sort Description The customer must pay the invoice by the due date. Unpaid invoices past the due date can be sent to collections.
ExternalId	Type string Properties Filter, Group, Nillable, Sort Description External reference ID set by Salesforce.
InvoiceCurrency	Type string Properties Filter, Group, Nillable, Sort Description Currency associated with this invoice.
InvoiceDate	Type date Properties Filter, Group, Nillable, Sort Description The date that the invoice was posted. Used with payment terms to determine the invoice's DueDate. For example, an invoice with an InvoiceDate of April 1 and Net 30 payment terms would have a DueDate of May 1.
InvoiceNumber	Type string Properties Filter, Group, idLookup, Nillable, Sort Description System-created ID for this invoice.
SalesforceContractId	Type reference Properties Filter, Group, Nillable, Sort Description Salesforce Contract ID

Field	Details
	This field is a relationship field. Relationship Name SalesforceContract Relationship Type Lookup Refers To SalesforceContract
SalesforceInvoiceStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The state of the invoice. Possible values are: • DueSoon— • Paid • PastDue— • Pending
TotalAmount	Type double Properties Filter, Nillable, Sort Description The sum <code>TotalAmount</code> of the invoice items.

Usage

Used by Your Account to manage invoices for your organization's Salesforce contract. Read-only.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[SalesforceContract](#)[SalesforcePayment](#)[SalesforceQuote](#)

SalesforcePayment

Read-only virtual object used in the Your Account App. Represents information about payments related to your organization's Salesforce invoice.

Supported Calls

`describeLayout()`, `describeSObjects()`, `query()`

Fields

Field	Details
AppliedAmount	Type double Properties Nillable, Sort Description Payment amount applied to your Salesforce invoice.
AppliedDate	Type date Properties Nillable, Sort Description Date the payment is applied to your Salesforce invoice.
Memo	Type string Properties Nillable, Sort Description Credit memo ID. Credit memos are issued for overpayment, rebates, and so forth.
PaymentCurrency	Type string Properties Nillable, Sort

Field	Details
	Description Type of currency used for the payment.
SalesforcePaymentName	Type string Properties Nillable, Sort Description Payment name.
SalesforcePaymentType	Type picklist Properties Nillable, Sort Description Payment method. Possible values are: • Boleto • Check • Credit Card • Credit Memo • Direct Debit • Unknown • Wire Transfer

Usage

Used by Your Account to manage payments for your organization's Salesforce contract. Read-only.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as SalesforcePayment.

[SalesforceContract](#)

[SalesforceInvoice](#)

[SalesforceQuote](#)

SalesforceQuote

Read-only virtual object used in the Your Account App. Represents information about your organization's quotes with Salesforce.

Supported Calls

`describeLayout()`, `describeSObjects()`, `query()`

Fields

Field	Details
ExternalId	Type string Properties Filter, Group, Nillable, Sort Description External reference ID set by Salesforce.
QuoteNumber	Type string Properties Filter, Group, idLookup, Nillable, Sort Description A system-generated number that identifies the quote.
SalesforceContractId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the contract that's associated with the quote. This field is a relationship field. Relationship Name SalesforceContract Relationship Type Lookup Refers To SalesforceContract
SalesforceQuoteStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The status of the quote. Possible values are:

Field	Details
	• Complete • Expired • NeedsApproval— • NeedsSignature— • Processing

Usage

Used by Your Account to manage quotes related to your organization's Salesforce contract. Read-only.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[SalesforceContract](#)

[SalesforceInvoice](#)

[SalesforcePayment](#)

SalesStoreCatalog

Represents the catalog associated with a store. This object is available in API version 49.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

You must have the B2B Commerce license and a CMS workspace to access a store.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The default value is USD. Possible values are:

Field	Details
	• USD—U.S. Dollar
ImplementorType	Type string Properties Filter, Group, Nillable, Sort Description The type of implementor. WebStoreCatalog is the only available implementor type for SalesStoreCatalog.
ProductCatalogId	Type reference Properties Filter, Group, Sort Description The ID that references the product catalog.
SalesStoreId	Type reference Properties Filter, Group, Sort Description The ID that references the store.

SalesTransactionItemShape

Defines the business logic for a sales transaction shape item, for example, an item in an order. This object is available in API version 57.0 and later.

This object is visible in Object Manager for customization; for example, you can create custom fields for this object.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `query()`, `retrieve()`

Special Access Rules

This object is available with Subscription Management, B2B Commerce, or B2C Commerce.

Fields

Field	Details
BasisTransactionItemShapeId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the sales transaction shape item to use as a reference when pricing this transaction. For example, when pricing an order, this field refers to the order being canceled. This field is available if Subscription Management is enabled. This field is a relationship field. Relationship Name BasisTransactionItemShape Relationship Type Lookup Refers To SalesTransactionItemShape
BillingFrequency	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The time period that indicates how often the sales transaction shape item is billed. This field is available if Subscription Management is enabled. Possible values are: • Annual • Monthly • Quarterly • Semi-Annual
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort Description The last day the sales transaction shape item is available. For example, the last day of the subscription. This field is available if Subscription Management is enabled.
ListPrice	Type currency

Field	Details
	Properties Create, Filter, Nillable, Sort Description The list price for the sales transaction shape item. This value is inherited from the related price book entry.
ListPriceTotal	Type currency Properties Create, Filter, Nillable, Sort Description The list price, inclusive of quantity. This calculated field is equal to ListPrice times Quantity.
NetUnitPrice	Type currency Properties Create, Filter, Nillable, Sort Description The final unit price of the product, after all adjustments are applied.
ObligatedAmount	Type currency Properties Create, Filter, Nillable, Sort Description In a subscription, the amount a subscriber is billed for products used during the subscription period that the subscriber returns before the subscription end date. This field's value is the price for use of the product. This field is available in version 57.0 and later. This field is available when Subscription Management is enabled.  Note: • A subscriber must submit a quantity amendment in order to change the subscription's product quantity. A quantity amendment request is only valid until the subscription end date. • A subscriber is eligible for a refund only for the periods when the products weren't used. • The subscription's proration policy indicates whether the obligated amount and the refund are prorated for partial periods.

Field	Details
ParentTransactionItemShapeId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the parent TransactionItemShape. This field is a relationship field. Relationship Name ParentTransactionItemShape Refers To SalesTransactionItemShape
PeriodBoundary	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The period boundary helps determine the start and end date of the billing periods. This field is available if Subscription Management is enabled. Possible values are: • AlignToCalendar—The period starts on the first day of the term unit, for example, the first day of the month. • Anniversary— The start date determines the boundary. For example, if a monthly subscription starts on September 13, the subscription starts on the 13th day of each month. • DayOfPeriod— The period starts on the day indicated by <code>PeriodBoundaryDay</code>. • LastDayOfPeriod— The period starts on the last day of the pricing term unit; for example, the last day of the month.
PeriodBoundaryDay	Type int Properties Create, Filter, Group, Nillable, Sort Description Required when <code>PeriodBoundary</code> is <code>DayOfPeriod</code>. Indicates day of the week or month that marks the period boundary. Must be an integer from 1 through 31. This field is available if Subscription Management is enabled.
PeriodBoundaryStartMonth	Type picklist

Field	Details
	Properties Create, Filter, Group, Restricted picklist, Nillable, Sort, Update Description Field is populated based on input in the StartDate, PeriodBoundary, and PeriodBoundaryDay when BillingFrequency is Annual or by manual user entry. Possible values are: • 1-January • 2-February • 3-March • 4-April • 5-May • 6-June • 7-July • 8-August • 9-September • 10-October • 11-November • 12-December
PricebookEntryId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the related price book entry. The related price book entry contains all the pricing information about the product being sold. This field is a polymorphic relationship field. Relationship Name PricebookEntry Relationship Type Lookup Refers To PricebookEntryInterface
PricingTermCount	Type double Properties Create, Filter, Nillable, Sort Description A calculated field indicating the number of pricing terms in the subscription. This field is available if Subscription Management is enabled.

Field	Details
PricingTransactionType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the type of pricing transaction, for example, a new sale, an amendment, or a renewal. This field is available if Subscription Management is enabled. Possible values are: • AmendmentAtLastNegotiatedPrice— Calculate the price of the amended sales transaction shape item using the same price book and price adjustments as the new sale item. For example, an order item that is amended using a pricing transaction type of AmendmentAtLastNegotiatedPrice is priced using the same price book information and price adjustments as the new sale item. The amended order item has the same price as the new sale order item. • AmendmentStartingFromListPrice— Calculate the price of the amended sales transaction shape item using current price book information, disregarding any pricing information or adjustments that were applied to the new sale item. Typically, an amended transaction item has a different price than the new sale transaction item. • Cancellation— Calculate the price of the canceled transaction. For example, let's say that a 1-year subscription was purchased on January 1, then canceled on July 31. The price of the canceled products and services from August 1 through Dec 31 is calculated. • NewSale— The price of a new transaction is calculated. • RenewalAtLastNegotiatedPrice— Calculate the price of the renewal sales transaction shape item using the same price book and price adjustments as the new sale item. For example, an order item that is renewed using a pricing transaction type of RenewalAtLastNegotiatedPrice is priced using the same price book information and price adjustments as the new sale item. The renewal order item has the same price as the new sale order item. • RenewalAtListPrice— Calculate the price of the renewal sales transaction shape item using current price book information, disregarding any pricing information or adjustments that were applied to the new sale item. Typically, a renewal transaction item has a different price than the new sale transaction item.
ProductId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the related product. This field is a relationship field. Relationship Name Product

Field	Details
	Relationship Type Lookup Refers To Product2
ProductSellingModelId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the related product selling model. The product selling model defines one method by which a product can be sold; for example, as a one-time sale, an evergreen subscription, or a termed subscription. This field is available if Subscription Management is enabled. This field is a relationship field. Relationship Name ProductSellingModel Relationship Type Lookup Refers To ProductSellingModel
ProrationPolicyId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the related proration policy. The proration policy defines how the price is calculated for each subscription period; for example, whether partial periods are allowed, and how remainder amounts are handled. This field is available if Subscription Management is enabled. This field is a relationship field. Relationship Name ProrationPolicy Relationship Type Lookup Refers To ProrationPolicy
Quantity	Type double Properties Create, Filter, Nillable, Sort

Field	Details
	Description Number of units in the sales transaction shape item.
SalesItemType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The type of sale. Possible values are: • Charge— An item that acts as a fee and can't be fulfilled. For example, a delivery charge, a shipping fee, or a membership fee. • Product— An item that is a good or service that can be fulfilled. For example, a widget or a widget warranty.
SalesTransactionItemShapeName	Type string Properties Create, Filter, Group, idLookup, Sort Description Required. The name of the sales transaction shape item.
SalesTransactionShapeId	Type reference Properties Create, Filter, Group, Sort Description Required. The ID of the sales transaction shape. A sales transaction shape is the way in which the sales transactions occur. For example, a cart, an order, or a quote. This field is a relationship field. Relationship Name SalesTransactionShape Relationship Type Lookup Refers To SalesTransactionShape
StartDate	Type date Properties Create, Filter, Group, Nillable, Sort

Field	Details
	Description The start date of the subscription. This field is available if Subscription Management is enabled.
StartingPriceTotal	Type currency Properties Create, Filter, Nillable, Sort Description The starting unit price, inclusive of quantity, prorated for the duration of the subscription. This field has two ways to obtain its value. The value can be manually entered or automatically calculated. The calculation is equal to <code>StartingUnitPrice</code> times <code>Quantity</code> .
StartingUnitPrice	Type currency Properties Create, Filter, Nillable, Sort Description The unit price before any adjustments.
StartingUnitPriceSource	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Indicates whether the starting unit price was inherited, entered manually, or calculated. Possible values are: <code>Inherited</code>— The starting unit price is copied from a previous transaction; for example, from the order item being renewed. <code>Manual</code>— The starting unit price is entered manually, for example, by a sales rep. <code>System</code> — The starting unit price is calculated using pricing information that was configured by an administrator; for example, a pricing tier.
StockKeepingUnit	Type string Properties Create, Filter, Group, Nillable, Sort Description The SKU assigned to the related product.
SubscriptionTerm	Type int

Field	Details
	Properties Create, Filter, Group, Nillable, Sort Description The number of terms in the subscription. You can indicate a subscription's length using either the start and end dates, or by using the start date and the subscription term. This field is available if Subscription Management is enabled.
TotalAdjustmentAmount	Type currency Properties Create, Filter, Nillable, Sort Description The sum of all adjustments applied to the related sales transaction shape items, inclusive of quantity, prorated for the duration of the subscription. Includes distributed price adjustment items and price adjustment items applied directly. This calculated field is equal to the sum of TotalAdjustmentAmount on the related sales transaction shape items.
TotalAdjustmentDistAmount	Type currency Properties Create, Filter, Nillable, Sort Description The sum of the distributed price adjustment items applied to the sales transaction shape item, prorated for the duration of the subscription. Doesn't include price adjustment items that are applied directly. A distributed price adjustment is automatically created to apply a transaction-level adjustment to the transaction items. For example, let's say that you have an order with two order items: one for a file storage service and another for a video streaming service. A 10% volume discount and a 15% manual discount are applied to the entire order. An additional 20% discount is applied to the file storage service. To distribute the order-level discounts, the system creates a 10% price adjustment item and a 15% price adjustment item for each order item. In this example, the file storage service's sales transaction shape item has the following field values: • TotalAdjustmentAmount — The sum of all item-level adjustments, including the 10% price adjustment item, the 15% price adjustment item, and the 20% price adjustment item. • TotalAdjustmentDistAmount— The sum of the distributed item-level adjustments, including the 10% price adjustment item and the 15% price adjustment item.
TotalLineAmount	Type currency Properties Create, Filter, Nillable, Sort

Field	Details
	Description The total price before price adjustments, inclusive of quantity, prorated for the duration of the subscription. This calculated field is equal to <code>StartingPriceTotal</code> times <code>PricingTermCount</code> .
<code>TotalPrice</code>	Type currency Properties Create, Filter, Nillable, Sort Description The price after all adjustments, inclusive of quantity, prorated for the duration of the subscription. This calculated field is equal to <code>TotalAdjustmentAmount</code> plus <code>StartingPriceTotal</code> .

SalesTransactionShape

Defines the business logic for a sales transaction; for example, an order, a quote, or a cart. This object is available in API version 57.0 and later.

This object is visible in Object Manager for customization; for example, you can create custom fields for this object.

Supported Calls

`describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

This object is available with Subscription Management, B2B Commerce, or B2C Commerce.

Fields

Field	Details
<code>AccountId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort Description The unique identifier for the account associated with this sales transaction shape. This field is available when <code>OrgPermissions</code> or <code>Platform</code> is enabled. This field is a relationship field.

Field	Details
	Relationship Name Account
	Relationship Type Lookup
	Refers To Account
SalesTransactionShapeName	Type string
	Properties Create, Filter, Group, idLookup, Sort
	Description The name of the sales transaction shape. For example, Quote.
TotalAdjustmentAmount	Type currency
	Properties Create, Filter, Nillable, Sort
	Description The sum of all adjustments applied to the sales transaction shape, inclusive of quantity, prorated for the duration of the subscription. Includes distributed price adjustment items and price adjustment items applied directly. This calculated field is equal to the sum of <code>TotalAdjustmentAmount</code> on the related sales transaction shape items.
TotalAdjustmentDistAmount	Type currency
	Properties Create, Filter, Nillable, Sort
	Description The sum of the distributed price adjustment items applied to the related sales transaction shape items, inclusive of quantity, prorated for the duration of the subscription. Does not include price adjustment items that are applied directly. This calculated field is equal to the sum of <code>TotalAdjustmentDistAmount</code> on the related sales transaction shape items.
TotalAmount	Type currency
	Properties Create, Filter, Nillable, Sort
	Description The final price of the sales transaction shape, after all adjustments, inclusive of quantity, prorated for the duration of the subscription. This calculated field equal to the sum of <code>TotalPrice</code> on the related sales transaction shape items.

Field	Details
TotalListAmount	Type currency Properties Create, Filter, Nillable, Sort Description The sum of the list price of the related sales transaction shape items, inclusive of quantity, prorated for the duration of the subscription. This calculated field is equal to the sum of <code>ListPriceTotal</code> on the related sales transaction shape items.
TotalProductAmount	Type currency Properties Create, Filter, Nillable, Sort Description The total price of all related sales transaction shape items of type Product, before price adjustments, inclusive of quantity, prorated for the duration of the subscription. This calculated field is equal to the sum of <code>TotalLineAmount</code> on the related sales transaction shape items of type Product.

SalesTransactionType

Represents the type of sales transaction, such as an initial, renewal, or amendment sale, and its related pricing configuration.. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available when Revenue Cloud is enabled.

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The description of the sales transaction type.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the sales transaction type.
PricingProcedureId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The pricing procedure related to the sales transaction type. This field is a relationship field. Relationship Name PricingProcedure Refers To ExpressionSetDefinition

Associated Objects

This object has the following associated objects.

[SalesTransactionTypeShare](#) on page 67
Sharing is available for the object.

SalesTrxnItemRelationShape

Describes the relationship between sales transaction shape items; for example, a bundle or set. This object is available in API version 57.0 and later.

Supported Calls

`create()` `describeSObjects()` `getDeleted()` `getUpdated()` `query()` `retrieve()`

Special Access Rules

This object is available with Subscription Management, B2B Commerce, or B2C Commerce.

Fields

Field	Details
AssocSalesTrxnItemShapeId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the associated sales transaction shape item. This field is a relationship field. In a bundle relationship, this sales transaction shape item is the bundle component. Relationship Name AssocSalesTrxnItemShape Relationship Type Lookup Refers To SalesTransactionItemShape
AssocSalesTrxnItemShapeRole	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Describes the position of the associated sales transaction shape item in the relationship. Possible values are: • BundleComponent—The associated sales transaction shape item is part of a bundle. • SetComponent—The associated sales transaction shape item is part of a set.
AssociatedItemShapePricing	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Describes how the associated sales transaction shape item is priced, relative to the main sales transaction shape item. Possible values are: • IncludedInBundlePrice— The associated sales transaction shape item's cost is \$0 because it's included in the bundle's price. • NotIncludedInBundlePrice— The associated sales transaction shape item has a cost because it's not included in the bundle's price.

Field	Details
MainSalesTrxnItemShapeId	Type reference Properties Create, Filter, Group, Sort Description The ID of the main sales transaction shape item. This field is a relationship field. In a bundle relationship, this sales transaction shape item is the bundle parent. Relationship Name MainSalesTrxnItemShape Relationship Type Lookup Refers To SalesTransactionItemShape
MainSalesTrxnItemShapeRole	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the position of the main sales transaction shape item in the relationship. Possible values are: • AddOnComponent— The main sales transaction shape item is an add on component. Available in API version 58.0 and later. • Bundle— The main sales transaction shape item is the bundle parent. • Set— The main sales transaction shape item is the set parent.
ProductRelationshipTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the record that describes the relationship between the main and associated sales transaction shape items. This field is a relationship field. Relationship Name ProductRelationshipType Relationship Type Lookup

Field	Details
	Refers To ProductRelationshipType
QuantityScaleMethod	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description How to scale the quantity of the associated sales transaction shape item, relative to the main sales transaction shape item. The value is informative; the system doesn't check whether the scaled quantities are correct. If this field has a non-null value, you can't edit the associated sales transaction shape item's quantity. Possible values are: • Constant—The associated sales transaction's item quantity remains the same in relation to the main sales transaction shape item's quantity. For example, let's say that the main sales transaction shape item has a quantity of one and the associated sales transaction shape item has a quantity of one. If you increase the quantity of the main sales transaction shape item to two, the associated sales transaction shape item's quantity remains at one. • Proportional—The associated sales transaction's item quantity increases or decreases based on the main sales transaction shape item's quantity. For example, let's say that the main sales transaction shape item has a quantity of one and the associated sales transaction shape item has a quantity of two. If you increase the quantity of the main order item to two, the associated order item's quantity increases to four. The default value is Proportional .
SalesTransactionShapeId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the related sales transaction shape. This field is a relationship field. Relationship Name SalesTransactionShape Relationship Type Lookup Refers To SalesTransactionShape
SalesTrxnItemRelationShapeName	Type string

Field	Details
	Properties Create, Filter, Group, idLookup, Sort
	Description Name of the relationship of the sales transaction shape item.

SalesTrxnItemRelationship

Describes the relationship between sales transaction items; for example, a bundle or set. This object interface is available in API version 58.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

This object interface is available if Subscription Management is enabled.

Fields

Field	Details
AssociatedItemPricing	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description Describes how the associated sales transaction item is priced, relative to the main sales transaction item. Possible values are: <code>IncludedInBundlePrice</code> — The associated sales transaction item's cost is \$0 because it's included in the bundle's price. <code>NotIncludedInBundlePrice</code> —The associated sales transaction item has a cost because it's not included in the bundle's price.
AssociatedSalesTrxnItemId	Type reference
	Properties Filter, Group, Nillable, Sort

Field	Details
	Description The unique identifier of the associated sales transaction item. This field is a polymorphic relationship field. In a bundle relationship, this sales transaction item is the bundle component. Relationship Name AssociatedSalesTrxnItem Relationship Type Lookup Refers To SalesTransactionItem
AssociatedSalesTrxnItemRole	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Describes the position of the associated sales transaction item in the relationship. Possible values are: • AddOnComponent—The associated sales transaction item is an add-on component. • BundleComponent—The associated sales transaction item is part of a bundle. • ClassificationComponent—The associated sales transaction item is a classification component. • SetComponent—The associated sales transaction item is part of a set.
ImplementorType	Type string Properties Filter, Group, Nillable, Sort Description The object that is implementing this object interface; for example, an OrderProduct object.
MainSalesTrxnItemId	Type reference Properties Filter, Group, Nillable, Sort Description The unique identifier of the main sales transaction item. This field is a polymorphic relationship field. In a bundle relationship, this sales transaction item is the bundle parent. Relationship Name MainSalesTrxnItem

Field	Details
	Relationship Type Lookup Refers To SalesTransactionItem
MainSalesTrxnItemRole	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the position of the main sales transaction item in the relationship. Possible values are: • Bundle—The main sales transaction item is the bundle parent. • Set—The main sales transaction item is the set parent.
ProductRelationshipTypeId	Type reference Properties Filter, Group, Nillable, Sort Description The unique identifier of the record that describes the relationship between the main and associated sales transaction items. This field is a relationship field. Relationship Name ProductRelationshipType Relationship Type Lookup Refers To ProductRelationshipType
QuantityScaleMethod	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description How to scale the quantity of the associated sales transaction item, relative to the main sales transaction item. The value is informative; the system doesn't check whether the scaled quantities are correct. If this field has a non-null value, you can't edit the associated sales transaction item's quantity. Possible values are:

Field	Details
	Constant — The associated sales transaction's item quantity remains the same in relation to the main sales transaction item's quantity. For example, let's say that the main sales transaction item has a quantity of one and the associated sales transaction item has a quantity of one. If you increase the quantity of the main sales transaction item to two, the associated sales transaction item's quantity remains at one. Proportional — The associated sales transaction's item quantity increases or decreases based on the main sales transaction item's quantity. For example, let's say that the main sales transaction item has a quantity of one and the associated sales transaction item has a quantity of two. If you increase the quantity of the main order item to two, the associated order item's quantity increases to four. The default value is <code>Proportional</code>.
<code>SalesTransactionId</code>	Type reference Properties Filter, Group, Nillable, Sort Description The unique identifier of the sales transaction to which the main and associated sales transaction items belong to. This field is a polymorphic relationship field. Relationship Name SalesTransaction Relationship Type Lookup Refers To SalesTransaction

SalesWorkQueueSettings

Represents settings used to customize work queue options for third-party scoring. Third-party scoring enables custom number fields on person accounts, contacts, and leads. You must be a Sales Engagement customer to update this object. Previously, you could only use the Einstein Intelligence Score for third-party scoring. Available starting in Version 47.0.



Note: This object can't be packaged.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
FeatureName	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description A value that represents the name of the work queue settings. To use custom number fields in the work queue, the value must be entered as <code>ThirdPartyScore</code>.
TargetEntity	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The related record object of the custom number field. Acceptable SObjects include <code>PersonAccount</code>, <code>Contact</code>, and <code>Lead</code>.
TargetField	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A value that represents the <code>DeveloperName</code> of the custom number field related to the <code>TargetEntity</code>. Custom fields must have a custom number data type. - To use Einstein Intelligence Score for lead scoring, enter <code>ScoreIntelligence.Score</code> for the <code>DeveloperName</code>. - To remove custom number fields from the work queue, enter <code>None</code>.

SandboxStatusEventLog

SandboxStatusEventLog stores details about Sandbox copies. This object is available in API version 62.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
CurrentSandboxOrganizationIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the current sandbox organization.
PendingSandboxOrganizationIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the target sandbox org.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. For example: 3nWgxWbDKWWDiK0FKfF5DV.
SandboxOrganizationIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the target sandbox org.
Status	Type string Properties Filter, Group, Nillable, Sort Description The status of the sandbox copy.
Timestamp	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943YAS

SamlSsoConfig

Represents a SAML Single Sign-On configuration. This object is available in API version 32.0 and later.

Single sign-on is a process that allows network users to access all authorized network resources without having to log in separately to each resource. Single sign-on allows you to validate usernames and passwords against your corporate user database or other client application rather than having separate user passwords managed by Salesforce.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

As of Summer '20 and later, only users with the View Setup and Configuration permission or both the Customize Application and Modify All Data permissions can access this object.

Fields

Field Name	Details
AttributeFormat	Type string Properties Filter, Group, Nillable, Sort Description For SAML 2.0 only and when <code>identityLocation</code> is set to <code>Attribute</code> . Possible values include <code>unspecified</code> , <code>emailAddress</code> , or <code>persistent</code> .

Field Name	Details
	All legal values can be found in the “Name Identifier Format Identifiers” section of the Assertions and Protocols SAML 2.0 specification .
AttributeName	Type string Properties Filter, Group, Nillable, Sort Description The name of the identity provider’s application. Get this name value from your identity provider.
Audience	Type string Properties Filter, Group, Sort Description The Issuer, also called the “Entity ID.” The value is a URL that uniquely identifies the SAML identity provider.
DeveloperName	Type string Properties Filter, Group, Sort Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object’s name in a managed package, and the changes are reflected in a subscriber’s organization.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
ErrorUrl	Type string Properties Filter, Nillable, Sort Description When there's an error during login, specify the URL of the page where users are directed. It must be publicly accessible, such as a public site Visualforce page. The URL can be absolute or relative.

Field Name	Details
ExecutionUserID	Type reference Properties Filter, Group, Nillable, Sort Description The user that runs the Apex handler class. The user must have the “Manage Users” permission. A user is required if you specify a SAML JIT handler class. This is a relationship field. Relationship Name ExecutionUser Relationship Type Lookup Refers To User
IdentityLocation	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The location in the assertion where a user is identified. Valid values are: • SubjectNameId—The identity is in the <Subject> statement of the assertion. • Attribute—The identity is specified in an <AttributeValue>, located in the <Attribute> of the assertion.
IdentityMapping	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The identifier that the service provider uses for the user during Just-in-Time user provisioning. Valid values are: • Username—The user’s Salesforce username. • FederationId—The federation ID from the user object; the identifier that’s used by the service provider for the user. • UserId—The user ID from the user’s Salesforce organization.
Issuer	Type string

Field Name	Details
	Properties Filter, idLookup, Group, Sort Description Also called the “Entity ID.” The value is a URL that uniquely identifies the SAML identity provider.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language for the organization.
LoginUrl	Type string Properties Filter, Nillable, Sort Description For SAML 2.0 only: The URL where Salesforce sends a SAML request to start the login sequence.
LogoutUrl	Type string Properties Filter, Nillable, Sort Description For SAML 2.0 only: The URL to direct users to where they click the Logout link. The default is <code>https://salesforce.com</code>.
MasterLabel	Type string Properties Filter, Group, Sort Description The text that’s used to identify the Visualforce page in the Setup area of Salesforce.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
OptionsSpInitBinding	Type boolean Properties Filter Description The service provider initiated request binding, either HTTP Redirect (<code>true</code>) or HTTP POST (<code>false</code>).
OptionsUseConfigRequestMethod	Type boolean Properties Filter Description If <code>true</code>, applies the selected Request Signature Method (RSM) during single logout. If <code>false</code>, the default RSM (<code>RSA-SHA1</code>) is applied.
OptionsUseSameDigestAlgoForSigning	Type boolean Properties Filter Description If <code>true</code>, uses a SAML digest algorithm based on the selected Request Signature Method (RSM). For example, if the selected RSM is <code>RSA-SHA256</code>, the digest algorithm is set to <code>SHA-256</code>. If <code>false</code>, uses the default digest algorithm (<code>SHA-1</code>), regardless of the selected RSM.

Field Name	Details
	This field is available in API version 55.0 and later. You can edit this field only for legacy SAML configurations created before the Spring '22 release. For configurations created after Spring '22, this field is <code>true</code> by default.
OptionsRequireMfaSaml	Type boolean Properties Filter Description Requires multi-factor authentication (MFA) for single sign-on with this SAML configuration based on the MFA status of each user. For this setting to trigger MFA, you must apply MFA directly to users via one of two methods. 1) Assign the user permission Multi-Factor Authentication for User Interface Logins. 2) Enable the org setting Require multi-factor authentication (MFA) for all direct UI logins to your Salesforce org.
OptionsUserProvisioning	Type boolean Properties Filter Description If <code>true</code>, Just-in-Time user provisioning is enabled, which creates users on the fly the first time that they try to log in. Specify <code>Federation ID</code> for the <code>identityMapping</code> value to use this feature.
RequestSignatureMethod	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The method that's used to sign the SAML request. Valid values are: • RSA-SHA1 • RSA-SHA256
SamlJitHandlerId	Type reference Properties Filter, Group, Nillable, Sort Description The name of an existing Apex class that implements the <code>Auth.SamlJitHandler</code> interface. This is a relationship field.

Field Name	Details
	Relationship Name SamlJitHandler Relationship Type Lookup Refers To ApexClass
SingleLogoutBinding	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Determines where to put the LogoutRequest or LogoutResponse in the SAML request during single logout (SLO). The value is base64 encoded. Valid values are: • <code>RedirectBinding</code> — Sent in the query string, deflated. • <code>PostBinding</code> — Sent in the POST body, not deflated.
SingleLogoutUrl	Type string Properties Filter, Group, Nillable, Sort Description The SAML single logout endpoint. This URL is the endpoint where Salesforce sends LogoutRequests (when Salesforce initiates a logout), or LogoutResponses (when the identity provider initiates a logout).
ValidationCert	Type string Properties Filter, Sort Description The certificate that's used to validate the request. Get this certificate value from your identity provider.
Version	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The SAML version. Valid values are:

Field Name	Details
	• SAML1_1 • SAML2_2

SavedPaymentMethod

Represents a payment method saved by an authenticated customer. This object is available in API version 58.0 and later

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`

Special Access Rules

To access Salesforce Payments objects with the API, your org must have one or more of these licenses: Salesforce Payments, Salesforce Order Management, B2B Commerce, or D2C Commerce. Salesforce Payments objects are available only in Lightning Experience.

Fields

Field	Details
AccountHolderEmail	Type string Properties Filter, Group, Nillable, Sort Description Email address of the payment method holder.
AccountHolderName	Type string Properties Filter, Group, Nillable, Sort Description Full name of the payment method holder.
AsyncGatewayRefNumber	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort

Field	Details
	Description The payment transaction ID created by the payment gateway for asynchronous payments. This field is available in API version 66.0 and later. • For Adyen, use the pspReference. • For Stripe, use the fingerprint value.
BankAccountHolderType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Determines whether the bank account is held by a business or an individual. Possible values are: • Business • Individual
BankAccountType	Type string Properties Filter, Group, Nillable, Sort Description Characterizes the bank account, such as a checking or savings account.
BankCode	Type string Properties Filter, Group, Nillable, Sort Description Code that represents the bank who issued the payment method.
BankName	Type string Properties Filter, Group, Nillable, Sort Description Name of the bank that issued the payment method.
BillingAddress	Type address Properties Filter, Nillable

Field	Details
	Description The billing address of the account holder of the payment method. This is the compound form of the billing address. Read-only. For details on compound address fields, see Address Compound Fields.
BillingCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the billing address. Maximum size is 40 characters.
BillingCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the billing address. Maximum size is 80 characters.
BillingGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Accuracy level of the geocode for the billing address. For details on geolocation compound fields, see Compound Field Considerations and Limitations.
BillingLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>BillingLongitude</code> to specify the precise geolocation of a billing address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations.
BillingLongitude	Type double Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description Used with <code>BillingLatitude</code> to specify the precise geolocation of a billing address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places. See Compound Field Considerations and Limitations for details on geolocation compound fields.
BillingPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the billing address. Maximum size is 20 characters.
BillingState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the billing address. Maximum size is 80 characters.
BillingStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the billing address.
ExpiryMonth	Type int Properties Filter, Group, Nillable, Sort Description Month the payment method expires.
ExpiryYear	Type int Properties Filter, Group, Nillable, Sort Description Year the payment method expires.
ExtendedPaymentMethodType	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort Description Other saved payment methods used for the transaction. This field is required when the value of the <code>Type</code> field is <code>extd_altrn_payment_method_type</code> or <code>extd_wallet</code>. This field is available in API version 66.0 and later.
GatewayReference	Type string Properties Filter, Group, idLookup, Nillable, Sort Description A reference to the saved payment owner at the payment gateway. For example, a Stripe customer ID.
GatewayToken	Type encryptedstring Properties Nillable Description Unencrypted unique token ID generated by the payment gateway to represent the card payment method during transactions. <code>GatewayToken</code> is for use with APIs earlier than version 52.0. For version 53.0 and latter, use the <code>GatewayTokenEncrypted</code> field. To secure the token, use the <code>GatewayTokenEncrypted</code> field. An error message appears if you try to record a <code>GatewayToken</code> for a card payment method that already has a <code>GatewayToken</code> or <code>GatewayTokenEncrypted</code> value.
IsDefault	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Customer's default payment method. The default value is <code>false</code>.
IsMerchantCreated	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the merchant saved the payment method on behalf of the payer. The Payer must provide consent to the merchant to save this information.

Field	Details
	The default value is <code>false</code> .
<code>IsSharedWithinSameAccount</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the saved payment method is visible to all contacts in an account (<code>true</code>) or only to the contact who created it (<code>false</code>). The default value is <code>false</code>. This field is available in API version 64.0 and later.
<code>Issuer</code>	Type string Properties Filter, Group, Nillable, Sort Description Financial institution issuing the payment method.
<code>Last4</code>	Type string Properties Filter, Group, Nillable, Sort Description Last four digits of the payment method account number.
<code>LastReferencedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record or list view related to this record, but didn't access it directly.
<code>LastViewedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible the user referenced this record but didn't view it directly.

Field	Details
MerchantAccountId	Type reference Properties Filter, Group, Sort Description Identifies the Salesforce Payments Merchant Account. This field is a relationship field. Relationship Name MerchantAccount Relationship Type Lookup Refers To MerchantAccount
Name	Type string Properties Filter, Group, idLookup, Sort Description Name of the saved payment method.
Network	Type string Properties Filter, Group, Nillable, Sort Description Saved payment method card network, for example Visa or Union Pay.
Nickname	Type string Properties Filter, Group, Nillable, Sort Description Additional name or label to easily identify the payment method.
PaymentGatewayId	Type reference Properties Filter, Group, Sort

Field	Details
	Description The payment gateway that is used to create a gateway token. For transactions with a saved payment method in Salesforce, this field stores the payment gateway ID used in the transaction. This field is a relationship field. This field is a relationship field. Relationship Name PaymentGateway Relationship Type Lookup Refers To PaymentGateway
PaymentMethodSubType	Type string Properties Create, Filter, Group, Nillable, Sort Description A payment method that exists as a subtype of a payment method type. For example, Visa, Mastercard, and American Express exist as subtypes of the Card payment method. This field is available in API version 66.0 and later.
ProcessingMode	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Indicates whether the payment was made outside of the Salesforce platform. This field is available in API version 66.0 and later. Possible values are: • External • Salesforce
ReferenceOwnerId	Type reference Properties Filter, Group, Sort Description ID of the Account or Contact record that owns the payment method. This field is a polymorphic relationship field. Relationship Name ReferenceOwner

Field	Details
	Relationship Type Lookup Refers To Account or Contact
StandardEntryClassCode	Type picklist Properties Filter, Group, Restricted picklist, Sort Description A three-letter code that indicates how a customer or a business initiated and authorized an ACH payment. Possible values are: • CCD—Corporate credit or debit entry • PPD—Prearranged payment or deposit entry • TEL—Telephone-initiated entry • WEB—Internet or mobile-initiated entry
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Status of the saved payment method. Possible values are: • Active • AwaitingPayment • Errored—Failed • Expired
Type	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Type of saved payment method. Possible values are: • au_becs_debit • bacs_debit • bancontact

Field	Details
	• card • extd_apm_type • extd_wallet • ideal • sepa_debit • us_bank_account – ACH Direct Debit
UsageType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Indicates if the payment method is used on or off session. Possible values are: • OffSession • OnSession • RestrictedOffSession

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[SavedPaymentMethodChangeEvent](#) on page 68

Change events are available for the object.

[SavedPaymentMethodFeed](#) on page 55

Feed tracking is available for the object.

[SavedPaymentMethodHistory](#) on page 63

History is available for tracked fields of the object.

[SavedPaymentMethodOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[SavedPaymentMethodShare](#) on page 67

Sharing is available for the object.

SavedPaymentMethodEvent

Represents a saved payment method platform event. Subscribe to these events so you can listen and respond to them when they're published. For example, create a Salesforce Flow that is triggered when one of these events is published. This object is available in API version 59.0 and later.

For more information about platform events, see the [Platform Events Developer Guide](#).

Supported Calls

`describeSObjects()`

Special Access Rules

To access Salesforce Payments objects, you must have a Salesforce Payments license and Payments must be enabled for your org. Salesforce Payments objects are available only in Lightning Experience.

Fields

Field	Details
ChangeType	Type picklist Properties Restricted picklist Description Type of saved payment method event, which triggers an event notification. You can write code to operate conditionally on the value of this field. For example, you can ignore a create change but get notified of updates. Possible values are: • <code>Create</code>—Saved payment method created. • <code>Delete</code>—Saved payment method deleted. • <code>Update</code>—Saved payment method property changed.
SavedPaymentMethodId	Type reference Properties Nillable Description Identifies the SavedPaymentMethod record for which the event occurs. This field is a relationship field. Relationship Name SavedPaymentMethod Relationship Type Lookup Refers To SavedPaymentMethod

SchedulingAdherenceDetail

Represents the breakdown of daily shift adherence data by agent status. This object is available in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The org requires a Workforce Engagement license, and both Workforce Engagement and Omni-Channel must be enabled. The user requires the Workforce Engagement Planner or Workforce Engagement Admin permission set.

Fields

Field	Details
IsShrinkage	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if the linked status is considered as shrinkage time (<code>true</code>) or not (<code>false</code>). Shrinkage time is time, such as breaks, when an agent doesn't receive work. The default value is <code>false</code> .
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description A number that identifies this detail record.
SchedulingAdherenceSummaryId	Type reference Properties Create, Filter, Group, Sort Description The ID of the Scheduling Adherence Summary. This is a relationship field. Relationship Name SchedulingAdherenceSummary

Field	Details
	Relationship Type Lookup Refers To SchedulingAdherenceSummary
StatusId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the agent status represented by this detail record. This is a relationship field. Relationship Name Status Relationship Type Lookup Refers To ServicePresenceStatus
StatusName	Type string Properties Filter, Group, Nillable, Sort Description The name of the agent status represented by this detail record.
TotalStatusMinutes	Type int Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Total minutes that the agent was present with this status.

SchedulingAdherenceSummary

Represents daily shift adherence data for a service resource in a service territory and job profile on a specific date. This object is available in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The org requires a Workforce Engagement license, and both Workforce Engagement and Omni-Channel must be enabled. The user requires the Workforce Engagement Planner or Workforce Engagement Admin permission set.

Fields

Field	Details
AdherencePercentage	Type double Properties Filter, Sort Description Percentage of time that the agent was present during the scheduled shift time. This is a calculated field. Formula $\text{AdherencePercentage} = \frac{\text{TotalAdherenceMinutes}}{\text{TotalScheduledMinutes}}$
ConformancePercentage	Type double Properties Filter, Sort Description Percentage of time when the agent was present versus the duration of scheduled shifts. The time that the agent is present can extend beyond the scheduled shift. This is a calculated field. Formula $\text{ConformancePercentage} = \frac{\text{TotalPresenceMinutes}}{\text{TotalScheduledMinutes}}$
Date	Type date Properties Create, Filter, Group, Sort, Update Description Date for which the adherence data is calculated.

Field	Details
JobProfileId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the job profile. This is a relationship field. Relationship Name JobProfile Relationship Type Lookup Refers To JobProfile
JobProfileName	Type string Properties Filter, Group, Nillable, Sort Description The name of the job profile.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description A number that identifies this summary record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The user who owns the schedule adherence summary. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Field	Details
ServiceResourceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the service resource. This is a relationship field. Relationship Name ServiceResource Relationship Type Lookup Refers To ServiceResource
ServiceResourceName	Type string Properties Filter, Group, Nillable, Sort Description The name of the service resource.
ServiceTerritoryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the service territory. This is a relationship field. Relationship Name ServiceTerritory Relationship Type Lookup Refers To ServiceTerritory
ServiceTerritoryName	Type string Properties Filter, Group, Nillable, Sort Description The name of the service territory.

Field	Details
TotalAdherenceMinutes	Type int Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Total minutes that the agent was present during a shift.
TotalInteractionMinutes	Type int Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Total minutes that the agent was actively receiving work.
TotalPresenceMinutes	Type int Properties Filter, Group, Nillable, Sort Description Total minutes of agent presence time. This is a calculated field. Formula $\text{TotalPresenceMinutes} = \text{TotalInteractionMinutes} + \text{TotalShrinkageMinutes}$
TotalScheduledMinutes	Type int Properties Create, Filter, Group, Sort, Update Description Total minutes of scheduled shift time for the agent.
TotalShrinkageMinutes	Type int Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Total minutes that the agent was present but not receiving work, such as break times.

Associated Objects

This object has the following associated objects. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

[SchedulingAdherenceSummaryOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[SchedulingAdherenceSummaryShare](#) on page 67

Sharing is available for the object.

SchedulingConstraint

Represents scheduling constraints on each service resource. This object is available in API version 50.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

The org requires the Workforce Engagement license. To view records, the user requires the Workforce Engagement Agent permission set. To create, edit, or delete records, the user requires the Workforce Engagement Planner permission set.

Fields

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the scheduling constraint was last modified. Its label in the user interface is Last Modified Date.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the scheduling constraint was last viewed.
MaxNonstandardShiftsPerMonth	Type int

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The maximum number of non-standard shifts assigned to an agent in a month. This field is available in API version 54.0 and later.
MaxShiftsPerDay	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The maximum number of shifts an agent can have in a day.
MaxShiftsPerMonth	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The maximum number of shifts an agent can have in a month.
MaxShiftsPerWeek	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The maximum number of shifts an agent can have in a week.
MaxWorkingHoursPerDay	Type double Properties Create, Filter, Nillable, Sort, Update Description The maximum number of hours an agent can have in a day.
MaxWorkingHoursPerMonth	Type double Properties Create, Filter, Nillable, Sort, Update Description The maximum number of hours an agent can have in a month.

Field	Details
MaxWorkingHoursPerWeek	Type double Properties Create, Filter, Nillable, Sort, Update Description The maximum number of hours an agent can have in a week.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The scheduling constraint record name.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the scheduling constraint. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
RestTimeMinutes	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The minimum rest time, in minutes, between an agent's consecutive shifts. This field is available in API versions 56.0 and later.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

SchedulingConstraintOwnerSharingRule on page 65

Sharing rules are available for the object.

SchedulingConstraintShare on page 67

Sharing is available for the object.

SchedulingObjective

Represents business goals that the scheduling tools consider. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

The org must have the Workforce Engagement license. To view, create, edit, and delete records, the user needs to have the Workforce Engagement Planner permission set.

Fields

Field	Details
Description	Type textarea Properties Create, Nillable, Update Description The scheduling objective description.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The developer name of the record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description Possible values are the supported languages for Workforce Engagement.
MasterLabel	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The scheduling objective name.
SchedulingCategory	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The record that the scheduling objective applies to. Possible values are: • A—Appointment • B—Shift
SchedulingObjectiveType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The type of scheduling objective. Possible values are: • AgentPreference—Scheduling tools consider agents' service resource preferences. In the UI, this value appears as Maximized Preferences. • BalanceNonStandardShifts—Scheduling tools balance the number of shifts across available agents within a time period. • BalanceShifts—Scheduling tools balance the number of non-standard shifts across available agents within a time period.

SchedulingRule

Represents scheduling rules that are hard constraints in the scheduling logic engine. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

The org must have the Workforce Engagement license. To view, create, edit, and delete records, the user needs to have the Workforce Engagement Planner permission set.

Fields

Field	Details
Description	Type textarea Properties Create, Nillable, Update Description The scheduling rule description.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The developer name value of the record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the scheduling rule.
MasterLabel	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The scheduling rule name.

Field	Details
SchedulingCategory	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Shifts. Possible values are: • A—Appointment • B—Shift
SchedulingRuleType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The scheduling rule type. Possible values are: • A—Active Resources • B—Match Skills • C—Availability • LimitNonstandardShifts—Specifies a rule type that limits how many non-standard shifts can be assigned to each agent. This type is available in API version 54.0 and later. • M—Match Territory • Q—Match Queues • RestTimeMinutes—Specifies a rule type that requires the agent to have a minimum rest time between consecutive shifts. This type is available in API version 56.0 and later. • W—Work Limit

SchedulingRuleParameter

Represents scheduling rule parameters associated with a scheduling rule. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

The org must have the Workforce Engagement license. To view, create, edit, or delete records, the user needs to have the Workforce Engagement Planner permission set.

Fields

Field	Details
SchedulingParameterKey	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The scheduling rule parameter name. Possible values are: - ConsiderAbsence—Consider absences when determining a service resource’s availability. This type is available in API version 56.0 and later. - ConsiderSTM—Consider service territory membership when determining a service resource’s availability. Service territory membership defines the resource’s working hours in a location. This type is available in API version 56.0 and later. - C—Constraint Field Name - L—Limit Type - R—Resolution - T—Time Resolution - W—Work Unit
SchedulingRuleId	Type reference Properties Create, Filter, Group, Sort Description The scheduling rule ID. This is a relationship field. Relationship Name SchedulingRule Relationship Type Lookup Refers To SchedulingRule
Value	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The scheduling rule parameter value.

Scontrol

A custom s-control, which is custom content that is hosted by the system but executed by the client application.

 **Important:** Visualforce pages supersede s-controls. Organizations that haven't previously used s-controls can't create them. Existing s-controls are unaffected, and can still be edited. We recommend that you move your s-controls to Visualforce. We continue to support the Scontrol object.

Represents a custom s-control, which is custom content that the system hosts, but client applications execute. An s-control can contain any type of content that you can display or run in a Web browser.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

- Your organization must be using Enterprise, Developer, or Unlimited Edition and be enabled for custom s-controls.
- Customer Portal users can't access this object.

Fields

Field	Details
Binary	Type base64
	Properties Create, Nillable, Update
	Description Binary content of this custom s-control, such as an ActiveX control or a Java archive. Can be specified when created, but not when updated. Limit: 5 MB.
BodyLength	Type int
	Properties Filter, Group, Sort

Field	Details
	Description The length of the custom s-control. Label is Binary Length.
ContentSource	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the source of the s-control content, either custom HTML, a snippet (s-controls that are included in other s-controls), or a URL.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the custom s-control.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Label is S-Control Name.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
EncodingKey	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Picklist of character set encodings, including ISO-08859-1, UTF-8, EUC, JIS, Shift-JIS, Korean (ks_c_5601-1987), Simplified Chinese (GB2312), and Traditional Chinese (Big5).

Field	Details
Filename	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description An uploaded object to display when the custom s-control is added to a custom link. Can be a Java applet, an ActiveX control, or any other type of desired content.
HtmlWrapper	Type textarea Properties Create, Update Description Required. HTML page that will be delivered when the user views this custom s-control. This HTML page can be the entire content of the custom s-control, or it can reference the binary. Limit: 1,048,576 characters. Label is HTML Body.
Name	Type string Properties Create, Filter, Group, Sort, Update Description Required. Name of this custom s-control. Label is Label.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, NamespacePrefix is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, NamespacePrefix is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.

Field	Details
SupportsCaching	Type boolean
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description Indicates whether the s-control supports caching (<code>true</code>) or not (<code>false</code>).

Usage

Use custom s-controls to manage custom content that extends application functionality. All users can view custom s-controls, but the “Customize Application” permission is required to create or update custom s-controls.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

ScontrolLocalization

The translated value of the field label for an s-control.



Important: Visualforce pages supersede s-controls. Organizations that haven't previously used s-controls can't create them. Existing s-controls are unaffected, and can still be edited.

When the Translation Workbench is enabled for your organization, provides the translation of the field label of an s-control.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

- Your organization must be using Professional, Enterprise, Developer, or Unlimited Edition and be enabled for the Translation Workbench.
- To view this object, you must have the “View Setup and Configuration” permission.

Fields

Field	Details
LanguageLocaleKey	Type picklist

Field	Details
	Properties Create, Filter, Nillable, Restricted picklist Description This field is available in API version 16.0 and earlier. It is the same as the <code>Language</code> field.
Language	Type picklist Properties Create, Filter, Nillable, Restricted picklist Description This field is available in API version 17.0 and later. The combined language and locale ISO code, which controls the language for labels displayed in an application. This picklist contains the following fully-supported languages: - Chinese (Simplified): <code>zh_CN</code> - Chinese (Traditional): <code>zh_TW</code> - Danish: <code>da</code> - Dutch: <code>nl_NL</code> - English: <code>en_US</code> - Finnish: <code>fi</code> - French: <code>fr</code> - German: <code>de</code> - Italian: <code>it</code> - Japanese: <code>ja</code> - Korean: <code>ko</code> - Norwegian: <code>no</code> - Portuguese (Brazil): <code>pt_BR</code> - Russian: <code>ru</code> - Spanish: <code>es</code> - Spanish (Mexico): <code>es_MX</code> Spanish (Mexico) defaults to Spanish for customer-defined translations. - Swedish: <code>sv</code> - Thai: <code>th</code> The Salesforce user interface is fully translated to Thai, but Help is in English. The following end-user only languages are available. - Arabic: <code>ar</code>

Field	Details
	- Bulgarian: <code>bg</code> - Croatian: <code>hr</code> - Czech: <code>cs</code> - English (UK): <code>en_GB</code> - Greek: <code>el</code> - Hebrew: <code>iw</code> - Hungarian: <code>hu</code> - Indonesian: <code>in</code> - Polish: <code>pl</code> - Portuguese (European): <code>pt_PT</code> - Romanian: <code>ro</code> - Slovak: <code>sk</code> - Slovenian: <code>sl</code> - Turkish: <code>tr</code> - Ukrainian: <code>uk</code> - Vietnamese: <code>vi</code> The following platform languages are available for organizations that use Salesforce exclusively as a platform. - Albanian: <code>sq</code> - Afrikaans: <code>af</code> - Amharic: <code>am</code> - Arabic (Algeria): <code>ar_DZ</code> - Arabic (Bahrain): <code>ar_BH</code> - Arabic (Egypt): <code>ar_EG</code> - Arabic (Iraq): <code>ar_IQ</code> - Arabic (Jordan): <code>ar_JO</code> - Arabic (Kuwait): <code>ar_KW</code> - Arabic (Lebanon): <code>ar_LB</code> - Arabic (Libya): <code>ar_LY</code> - Arabic (Morocco): <code>ar_MA</code> - Arabic (Oman): <code>ar_OM</code> - Arabic (Qatar): <code>ar_QA</code> - Arabic (Saudi Arabia): <code>ar_SA</code> - Arabic (Sudan): <code>ar_SD</code> - Arabic (Syria): <code>ar_SY</code> - Arabic (Tunisia): <code>ar_TN</code> - Arabic (United Arab Emirates): <code>ar_AE</code> - Arabic (Yemen): <code>ar_YE</code>

Field

Details

- Armenian: `hy`
- Basque: `eu`
- Bosnian: `bs`
- Bengali: `bn`
- Burmese: `my`
- Catalan: `ca`
- Chinese (Hong Kong): `zh_HK`
- Chinese (Singapore): `zh_SG`
- Chinese (Malaysia): `zh_MY`
- Dutch (Belgium): `nl_BE`
- English (Australia): `en_AU`
- English (Belgium): `en_BE`
- English (Canada): `en_CA`
- English (Cyprus): `en_CY`
- English (Germany): `en_DE`
- English (Hong Kong): `en_HK`
- English (India): `en_IN`
- English (Ireland): `en_IE`
- English (Israel): `en_IL`
- English (Malaysia): `en_MY`
- English (Malta): `en_MT`
- English (Netherlands): `en_NL`
- English (New Zealand): `en_NZ`
- English (Philippines): `en_PH`
- English (Singapore): `en_SG`
- English (South Africa): `en_ZA`
- English (United Arab Emirates): `en_AE`
- Estonian: `et`
- Farsi: `fa`
- French (Belgium): `fr_BE`
- French (Canada): `fr_CA`
- French (Luxembourg): `fr_LU`
- French (Morocco): `fr_MA`
- French (Switzerland): `fr_CH`
- Georgian: `ka`
- German (Austria): `de_AT`
- German (Belgium): `de_BE`
- German (Luxembourg): `de_LU`

Field

Details

- German (Switzerland): `de_CH`
- Greek (Cyprus): `el_CY`
- Greenlandic: `kl`
- Gujarati: `gu`
- Hawaiian: `haw`
- Haitian Creole: `ht`
- Hindi: `hi`
- Icelandic: `is`
- Irish: `ga`
- Italian (Switzerland): `it_CH`
- Kannada: `kn`
- Kazakh: `kk`
- Khmer: `km`
- Latvian: `lv`
- Lithuanian: `lt`
- Luxembourgish: `lb`
- Macedonian: `mk`
- Malay: `ms`
- Malayalam: `ml`
- Maltese: `mt`
- Marathi: `mr`
- Montenegrin: `sh_ME`
- Romanian (Moldova): `ro_MD`
- Romansh: `rm`
- Russian (Armenia): `ru_AM`
- Russian (Belarus): `ru_BY`
- Russian (Kazakhstan): `ru_KZ`
- Russian (Kyrgyzstan): `ru_KG`
- Russian (Lithuania): `ru_LT`
- Russian (Moldova): `ru_MD`
- Russian (Poland): `ru_PL`
- Russian (Ukraine): `ru-UA`
- Samoan: `sm`
- Serbian (Cyrillic): `sr`
- Serbian (Latin): `sh`
- Spanish (Argentina): `es_AR`
- Spanish (Bolivia): `es_BO`
- Spanish (Chile): `es_CL`

Field	Details
	- Spanish (Colombia): <code>es_CO</code> - Spanish (Costa Rica): <code>es_CR</code> - Spanish (Dominican Republic): <code>es_DO</code> - Spanish (Ecuador): <code>es_EC</code> - Spanish (El Salvador): <code>es_SV</code> - Spanish (Guatemala): <code>es_GT</code> - Spanish (Honduras): <code>es_HN</code> - Spanish (Nicaragua): <code>es_NI</code> - Spanish (Panama): <code>es_PA</code> - Spanish (Paraguay): <code>es_PY</code> - Spanish (Peru): <code>es_PE</code> - Spanish (Puerto Rico): <code>es_PR</code> - Spanish (United States): <code>es_US</code> - Spanish (Uruguay): <code>es_UY</code> - Spanish (Venezuela): <code>es_VE</code> - Swahili: <code>sw</code> - Tagalog: <code>tl</code> - Tamil: <code>ta</code> - Te reo: <code>mi</code> - Telugu: <code>te</code> - Urdu: <code>ur</code> - Welsh: <code>cy</code> - Xhosa: <code>xh</code> - Zulu: <code>zu</code> The values in this field are not related to the default locale selection.
NamespacePrefix	Type string Properties Filter, Nillable Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed

Field	Details
	managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
<code>ScontrolId</code>	Type reference Properties Create, Filter, Nillable Description The ID of the Scontrol that is being translated.
<code>Value</code>	Type string Properties Create, Filter, Nillable, Update Description The actual translated field label of the s-control. Label is Translation.

Usage

Use this object to translate your s-controls into a supported language. Users with the Translation Workbench enabled can view s-control translations, but either the "Customize Application" or "Manage Translation" permission is required to create or update s-control translations.

SEE ALSO:

[CategoryNodeLocalization](#)

[WeblinkLocalization](#)

Scorecard

Use scorecards to measure partner performance and establish benchmarks for channel programs within Experience Cloud. Display any report summary results that your channel account manager or executive team wants to see. This object is available in API version 40.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the scorecard.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the scorecard visible to end users.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who owns the scorecard. This is a polymorphic relationship field.

Field	Details
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User

Usage

The Scorecard object is used in tandem with the ScorecardMetric and ScorecardAssociation objects.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ScorecardOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[ScorecardShare](#) on page 67

Sharing is available for the object.

ScorecardAssociation

Represents a connection between a specific scorecard and the associated account, channel program, or channel program level. This object is available in API version 41.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the Scorecard Association.
ScorecardId	Type reference Properties Create, Filter, Group, Sort Description The ID of the scorecard that the association is related to. Several metrics can be tied to a single scorecard. This is a relationship field. Relationship Name Scorecard Relationship Type Lookup Refers To Scorecard
TargetEntityId	Type reference Properties Create, Filter, Group, Sort, Update Description The associated object that a specific scorecard is associated with. This is a polymorphic relationship field. Relationship Name TargetEntity

Field	Details
	Relationship Type Lookup
	Refers To Account, ChannelProgram, ChannelProgramLevel

ScorecardMetric

Stores information about a Salesforce report that is run and summarized to get a single value. The stored value is added as a metric to the related Scorecard object. This object is available in API version 40.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Category	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Groups metrics together. It comes with a predefined set of dropdown list entries and can be extended to address vendor's needs each category is user-generated and can be localized through translation workbench. Possible values are: • Adoption • Field Enablement • Marketing • Sales • Support The default value is 'Sales'.
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The description of the metric that appears on a scorecard.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the metric that appears on a scorecard.
ReportId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the report that is run and summarized to return a single value. This is a relationship field. Relationship Name Report Relationship Type Lookup Refers To Report
ScorecardId	Type reference Properties Create, Filter, Group, Sort Description The ID of the scorecard that the metric is related to. Several metrics can be tied to a single scorecard. This is a relationship field. Relationship Name Scorecard Relationship Type Lookup Refers To Scorecard

ScoreIntelligence

For internal use only.

ScratchOrgInfo

Represents a scratch org and its audit log. Use this object to create a scratch org and keep a log of its creation and deletion. This object is available in API version 41.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
AdminEmail	Type email Properties Create, Filter, Group, Nillable, Sort Description The email address of the scratch org's Administration user. The read only <code>SignupEmail</code> field is populated with this value. If you don't provide a value for <code>AdminEmail</code>, the field is left blank and the <code>SignupEmail</code> is populated with the email address of the org user who is creating this object.
AuthCode	Type string Properties Filter, Group, Nillable, Sort Description A one-time authorization code that can be exchanged for an OAuth access token and refresh token using standard Salesforce APIs. It's used with <code>ConnectedAppCallbackUrl</code> and <code>ConnectedAppConsumerKey</code>, when the specified connected app hasn't been configured with an X.509 certificate. This field is read only.
ConnectedAppCallbackUrl	Type textarea Properties Create

Field Name	Details
	Description Required. When used with <code>ConnectedAppConsumerKey</code>, it specifies the callback URL used for OAuth. If using Salesforce CLI, the default is <code>http://localhost:1717/OauthRedirect</code>.
<code>ConnectedAppConsumerKey</code>	Type string Properties Create, Filter, Group, Sort Description Required. When used with <code>ConnectedAppCallbackUrl</code>, it specifies the connected app that is approved automatically during scratch org creation. If using Salesforce CLI and the default connected app, indicate <code>PlatformCLI</code>.
<code>Country</code>	Type string Properties Create, Filter, Group, Nillable, Sort Description The two-character, upper-case ISO-3166 country code. You can find a full list of these codes at several sites, such as: www.iso.ch/iso/en/prods-services/iso3166ma/02iso-3166-code-lists/list-en1.html. The language of the scratch org is auto-determined based on the value of this field. If you don't specify a value, this field defaults to the Dev Hub's country code.
<code>DeletedBy</code>	Type string Properties Filter, Group, Nillable, Sort Description The user who requested that the scratch org be deleted. This field is read only.
<code>DeletedDate</code>	Type date Properties Filter, Group, Nillable, Sort Description The date when the <code>DeletedBy</code> user requested that the scratch org be deleted. This field is read only.
<code>Description</code>	Type textarea

Field Name	Details
	Properties Create, Nillable, Update Description A free-form text field for you to enter a description of this scratch org.
DurationDays	Type int Properties Create, Filter, Nillable, Group, Sort Description Number of days after which the scratch org expires. Valid values are 1–30. The default is 7.
Edition	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Required if you don't provide Snapshot or SourceOrg. The org edition of this scratch org. Valid values are Group, Developer, Enterprise, and Professional.
ErrorCode	Type string Properties Filter, Group, Nillable, Sort Description The error code if the scratch org creation isn't successful. This field is read only.
ExpirationDate	Type date Properties Filter, Group, Nillable, Sort Description Date when the scratch org expires. This field is read only.
Features	Type textarea Properties Create, Nillable

Field Name	Details
	Description A semi-colon delimited list of the features enabled in this scratch org, such as MultiCurrency. See the <i>Salesforce DX Developer Guide</i> for the full list of valid features.
HasSampleData	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Specifies whether the scratch org contains sample data. If set to <code>true</code>, the sample data is similar to the data in a Salesforce free trial org.
Language	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The language of the scratch org being created. Specify the language using a language code listed under "Supported Languages" in Salesforce Help. For example, use <code>zh_CN</code> for simplified Chinese. The value you select overrides the language set by locale. If you don't specify a value, the language is based on the <code>Country</code> used during scratch org creation. If you don't specify a value for <code>Country</code>, the value defaults to the Dev Hub's country.
LastLoginDate	Type date Properties Filter, Group, Nillable, Sort Description The date of the last user login to the scratch org. This field is read only.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record. This field is read only.

Field Name	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, and LastReferenceDate isn't null, the user accessed this record or list view indirectly. This field is read only.
LoginUrl	Type textarea Properties Nillable Description A URL that logs you in to the scratch org. This field is read only.
Name	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description The auto-generated ID of this scratch org. This field is read only.
Namespace	Type string Properties Create, Filter, Group, Nillable, Sort Description The namespace you want to associate with this scratch org. The value of this field corresponds to the NamespacePrefix field of the NamespaceRegistry object that describes your namespace.
OrgName	Type string Properties Create, Filter, Group, Sort Description Required. The name of the scratch org. This name appears as the Organization Name in the Company Information Setup page.
OwnerId	Type reference

Field Name	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who created this scratch org.
Release	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The release of the scratch org. During Salesforce's major release transitions, this field allows you to select the Salesforce release version, based on the version of your Dev Hub. This field is available in API version 46.0 and later. Valid values are: • Current • Preview • Previous See Select the Salesforce Release for a Scratch Org for more information.
ScratchOrg	Type string Properties Filter, Group, Nillable, Sort Description The org ID of the scratch org. This field is read only.
SignupCountry	Type string Properties Filter, Group, Sort Description The country code of the scratch org. This field is populated with the value of the <code>Country</code> field. If you didn't provide a value for <code>Country</code>, it's the country code of the Dev Hub. This field is read only.
SignupEmail	Type email Properties Filter, Group, Sort Description The email address of the scratch org's Administration user. This field is populated with the value of the <code>AdminEmail</code> field. If you didn't provide a value for

Field Name	Details
	<code>AdminEmail</code>, it's the email address of your user in the Dev Hub. This field is read only.
<code>SignupInstance</code>	Type string Properties Filter, Group, Nillable, Sort Description The Salesforce instance on which this scratch org resides. This field is read only.
<code>SignupLanguage</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language of the scratch org. This field is populated with the value of the <code>Language</code> field. If you didn't provide a value for <code>Language</code>, it's the language of the Dev Hub. This field is read only.
<code>SignupTrialDays</code>	Type int Properties Filter, Group, Nillable, Sort Description The number of days between the scratch org's creation and expiration. This field is read only.
<code>SignupUsername</code>	Type string Properties Filter, Group, Sort Description The username of the Administration user of this scratch org. This field is populated with the value of the <code>Username</code> field. If you didn't provide a value for <code>Username</code>, the value of this field is auto-generated. This field is read only.
<code>Snapshot</code>	Type string Properties Create, Filter, Group, Nillable, Sort

Field Name	Details
	Description If this scratch org was created from a scratch org snapshot, then this field contains either the name or ID of the snapshot. Specifically, the name corresponds to the <code>Name</code> field of the snapshot's record in the <code>OrgSnapshot</code> standard object; the ID corresponds to the record ID. If this scratch org wasn't created from a snapshot, this field is empty. If you specify <code>Snapshot</code>, you can't specify <code>Edition</code> or <code>SourceOrg</code>. This field is available in API version 61.0 and later.
SourceOrg	Type string Properties Create, Filter, Group, Nillable, Sort Description The ID of the org whose shape (features, settings, limits, and licenses) information is used for creating scratch orgs. If you specify <code>SourceOrg</code>, you can't specify <code>Edition</code> or <code>Snapshot</code>.
Status	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The status of the scratch org, such as active, expired, or deleted. This field is read only.
Username	Type string Properties Create, Filter, Group, Nillable, Sort Description The username of the Administration user of this scratch org.

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

ScratchOrgInfoFeed

Feed tracking is available for the object.

ScratchOrgInfoHistory

History is available for tracked fields of the object.

ScratchOrgInfoShare

Sharing is available for the object.

SEE ALSO:

- ActiveScratchOrg
- NamespaceRegistry
- Salesforce DX Developer Guide

SearchActivity

Represents search activity on a Knowledge article. Also known as KnowledgeSearchActivity. This object is available in API version 38.0 and later.

Supported Calls

describeSObjects(), getDeleted(), getUpdated(), query(), retrieve()

Special Access Rules

The Knowledge Base Search Dashboard permission must be enabled in your org.

Fields

Field	Details
AvgNumResults	Type double Properties Filter, Sort Description The number of search results returned for the search term. If Period is also included, this value is aggregated based on the time period specified.
ClickRank	Type double Properties Filter, Nillable, Sort Description The order that the article appeared in the search results when the user sorted the results by relevance and clicked it from the list of results.
ClickedRecordId	Type reference

Field	Details
	Properties Filter, Group, Nillable, Sort Description ID of the clicked article. This field is a polymorphic relationship field. Relationship Name ClickedRecord Relationship Type Lookup Refers To Knowledge__kav
ClickedRecordName	Type string Properties Filter, Group, Nillable, Sort Description The title of the clicked article taken when the user sorts the search results by relevance.
CountQueries	Type int Properties Filter, Group, Sort Description The number of searches for the period (day, month, or year).
CountUsers	Type int Properties Filter, Group, Sort Description The number of individual users who clicked the article.
KbChannel	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The channel that's applicable to the article. Possible values are: • AllChannels—All Channels

Field	Details
	• App—Internal App • Csp—Customer • Pkb—Public Knowledge Base • Prm—Partner
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of search activity.
Period	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The time period that the search count is applied to. For example, a record where the Count is 70 and the Period is Monthly indicates that 70 searches took place over the past month. Totals are aggregated daily for the current month, monthly from the past full month through the past full year, and yearly beyond that. Activity totals are collected nightly and aren't in real time. Possible values are: • DAY • MONTH • YEAR
QueryDate	Type date Properties Filter, Group, Sort Description The date of the search.
QueryLanguage	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language filter that's applied to the user's search.

Field	Details
SearchTerm	Type string Properties Filter, Group, Sort Description The first 100 characters of the search term that was used to search published articles in the knowledge base.

SearchClickEventLog

Search Click Event Log contains details about the user's interaction with the search results. This object is available in API version 61.0 and later.



Note: This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
ClickedRecordIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the result the user clicked in the search results page.
QueryIdentifier	Type string Properties Filter, Group, Nillable, Sort Description Unique ID of the search query.

Field	Details
Rank	Type int Properties Filter, Group, Nillable, Sort Description Ranking of the result clicked in the search results page.
RequestIdIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestIdIdentifier</code>. For example: 3nWgxWbDKWWDiK0FKfF5DV.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.

Usage

All searches within the app, including Experience Cloud sites, are included. However, unauthenticated guest users don't have a unique Salesforce user ID.

SearchEventLog

Search Event Log provides details about the user's search query. This object is available in API version 61.0 and later.

 **Note:** This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
<code>PrefixesSearched</code>	Type string Properties Filter, Group, Nillable, Sort Description A space-delineated list of key prefixes that are searched.
<code>QueryIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description Unique ID of the search query.
<code>RequestIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestIdentifier</code>. For example: <code>3nWgxWbDKWWDIK0FKfF5DV</code>.
<code>ResultCount</code>	Type int Properties Filter, Group, Nillable, Sort Description Number of results returned by the search query.

Field	Details
SearchQuery	Type string Properties Filter, Group, Nillable, Sort Description The first 100 characters of the search query.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the user who's using Salesforce services through the UI or the API. For example: 005300000009M943.

Usage

All searches within the app, including Experience Cloud sites, are included. However, unauthenticated guest users don't have a unique Salesforce user ID.

SearchLayout

Represents a search layout defined for an object. This object is available in API version 35.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

Users with the View Setup and Configuration permission can access this object.

Fields

Field	Details
ButtonsDisplayed	Type SearchLayoutButtonsDisplayed Properties Nillable Description The list of buttons available in list views for an object. This field is equivalent to the <code>listViewButtons</code> field on SearchLayouts in Metadata API.
DurableId	Type string Properties Filter, Group, Nillable, Sort Description Unique identifier for the field. Always retrieve this value before using it, as the value isn't guaranteed to stay the same from one release to the next. <code>DurableId</code> in queries allows you to find the right record without having to retrieve the entire record.
EntityDefinitionId	Type string Properties Filter, Group, Nillable, Sort Description ID of the record in <code>EntityDefinition</code>. Use in subqueries. This field is a relationship field. Relationship Name EntityDefinition Refers To EntityDefinition
FieldsDisplayed	Type SearchLayoutFieldsDisplayed Properties Nillable Description The list of fields displayed in a search result for the object. The name field is required. It's always displayed as the first column header, so it isn't included in this list; all additional fields are included. The field name relative to the object name, for example <code>MyCustomField__c</code>, is specified for each custom field.

Field	Details
	This field is equivalent to <code>searchResultsAdditionalFields</code> on SearchLayouts in Metadata API.
Label	Type string Properties Filter, Group, Nillable, Sort Description The label for this search layout.
LayoutType	Type string Properties Filter, Group, Nillable, Sort Description The type of search layout.
ListLayout	Type string Properties Filter, Group, Nillable, Sort Description Unique identifier for the field. Identifies the list layout a search layout is related to. Available in API version 48.0 and later.
Profile	Type string Properties Filter, Group, Nillable, Sort Description Unique identifier for the field. Identifies the profile to which a search layout applies. Available in API version 48.0 and later.
ProfileName	Type string Properties Filter, Group, Nillable, Sort Description The name of the profile to which a search layout applies. Available in API version 48.0 and later.

Usage

Use the SearchLayout object to control the fields displayed and actions available to a user profile. The search layout applies to global and lookup searches.

SearchPromotionRule

Represents a promoted search term, which is one or more keywords that you associate with a Salesforce Knowledge article. When a user's search query includes these keywords, the associated article is returned first in search results. This object is available in API version 31.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

A user must have the "Manage Promoted Search Terms" permission.

Fields

Field Name	Details
PromotedEntityId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the KnowledgeArticleVersion that the promoted search term is associated with. The article must be in published status.
Query	Type string Properties Create, Filter, Group, Sort, Update Description The text of the promoted search term. Maximum length: 100 characters. You can associate the same promoted search term with multiple articles. If the user's search matches the promoted term, all associated articles are promoted in search results, ordered by relevancy. For best results, create promoted search terms selectively and limit the number of articles that are promoted per term.

Usage

Use this object to optimize article search results in Salesforce Knowledge.

SecurityCustomBaseline

Provides the ability to read, create, and delete user-defined custom security baselines, which define an org’s security standards. This object is available in API version 39.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

You must have the “View Health Check” permission to read a custom baseline, and the “Manage Health Check” permission to create, edit, or delete one.

Fields

Field Name	Details
Baseline	Type textarea Properties Create, Nillable, Update Description The definition of an org’s security settings standards.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores.  Note: When creating large sets of data, always specify a unique DeveloperName for each record. If no DeveloperName is specified, performance may slow while Salesforce generates one for each record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.

Field Name	Details
IsDefault	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Sets the baseline as the default in Security Health Check.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the presence status.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Label for the category node.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix associated with the package.

SelfServiceUser

Represents a Contact who has been enabled to use your organization's Self-Service portal, where he or she can obtain online support.



Note: Starting with Spring '12, the Self-Service portal isn't available for new Salesforce orgs. Existing orgs continue to have access to the Self-Service portal.

Supported Calls

`create()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
ContactId	Type reference Properties Create, Filter, Group, Sort Description Required. All Self-Service users must be associated with a Contact. The contact's email should match the Self-Service user email. The contact must have a value in the AccountId field or an error occurs.
Email	Type email Properties Create, Filter, Group, Sort, Update Description Required. Make this the same as the email address for the Contact associated with this SelfServiceUser. Password resets and other system communication will be sent to this email address.
FirstName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description First name of the Self-Service user.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the Self-Service user is allowed to log in to the Self-Service portal (<code>true</code>) or not (<code>false</code>). Note that there is no way to delete a Self-Service user. They can only be marked as inactive.
IsDeleted	Type boolean

Field	Details
	Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
LanguageLocaleKey	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. This is a restricted picklist field. It is the primary language for the user. All on-screen text in the Self-Service portal is displayed in this language.
LastLoginDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the Self-Service user last logged in.
LastName	Type string Properties Create, Filter, Group, Sort, Update Description Required. Last name of the Self-Service user.
LocaleSidKey	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. This is a restricted picklist field. The value of this field affects the formatting and parsing of values, especially numeric values, in the Self-Service portal. Values are two-letter codes that indicate language and sometimes language and country. The codes are based on ISO standards.
Name	Type string Properties Filter, Group, Sort

Field	Details
	Description Concatenation of <code>FirstName</code> and <code>LastName</code> . Limited to 203 characters, including whitespaces.
<code>SuperUser</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this Self-Service user is a super user with additional access on his or her company's Self-Service portal (<code>true</code>) or not (<code>false</code>).
<code>TimeZoneSidKey</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. This is a restricted picklist field. The time zone of a affects the offset used when displaying or entering times in the Self-Service portal.
<code>Username</code>	Type string Properties Create, Filter, Group, Sort, Update Description Required. This contains the name that a Self-Service user enters to log into the Self-Service portal. Value must be unique in your organization. If you try to create or update a user with a duplicate value, the operation is rejected and an error is returned.

Usage

For security reasons, you can't query Self-Service user passwords via the API or the user interface. However, the API allows you to set and reset Self-Service user passwords using the `setPassword()` and `resetPassword()` calls.

SelfServiceUser records created from the API don't cause a notification email to be sent. If you want to notify the user, you must send them an email after creating the user.

SEE ALSO:

[Contact](#)

[User](#)

Seller

Represents the seller role of an individual with respect to a particular company or organization. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ActiveFromDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date when the seller's role became active.
ActiveToDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date when the seller's role is no longer active.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Name of this seller.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the account owner associated with this seller. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PartyId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Required. Represents the record based on the Individual object you want to associate the seller with. This is a relationship field. Relationship Name Party Relationship Type Lookup Refers To Individual
SalesAmount	Type int Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The total revenue amount gained from this seller.
SellerTier	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The tier at which this seller is ranked. Possible values are: • Bronze • Gold • Silver
SellerType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of sales this seller specializes in. Possible values are: • Distributor • Reseller • SalesPartner • Wholesaler

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[SellerHistory](#) on page 63

History is available for tracked fields of the object.

[SellerShare](#) on page 67

Sharing is available for the object.

SenderEmailAddress

Represents a From address in a marketing email. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
DisplayName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A descriptive name that makes the sender email address easier to identify.
EmailDomainKeyId	Type reference Properties Create, Filter, Group, Sort, Update Description The unique system ID of the domain associated with the sender email address. This field is a relationship field. Relationship Name EmailDomainKey Refers To EmailDomainKey
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description A unique identifier for the sender email address.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The unique user ID of the user who owns the sender email address object. This field is a polymorphic relationship field.

Field	Details
	Relationship Name Owner
	Refers To Group, User
Username	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description The part of the email address that comes before the @ symbol.

ServiceAppointment

Represents an appointment to complete work for a customer in Field Service, Lightning Scheduler, Intelligent Appointment Management, and Virtual Care. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
AccountId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description (Read only) The account associated with the appointment. If the parent record is a work order or work order line item, this field's value is inherited from the parent. Otherwise, it remains blank. This is a relationship field.
	Relationship Name Account

Field Name	Details
	Relationship Type Lookup Refers To Account
ActualDuration	Type double Properties Create, Filter, Nillable, Sort, Update Description The number of minutes that it took the resource to complete the appointment after arriving at the address. When values are first added to the <code>Actual Start</code> and <code>Actual End</code> fields, the <code>Actual Duration</code> is automatically populated to list the difference between the <code>Actual Start</code> and <code>Actual End</code> . If the <code>Actual Start</code> and <code>Actual End</code> fields are subsequently updated, the <code>Actual Duration</code> field doesn't re-update, but you can manually update it.
ActualEndTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The actual date and time the appointment ended.
ActualStartTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The actual date and time the appointment started.
Address	Type address Properties Filter Description The address where the appointment is taking place. The address is inherited from the parent record if the parent record is a work order or work order line item.
AppointmentNumber	Type string

Field Name	Details
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-assigned number that identifies the appointment.
ArrivalWindowEndTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The end of the window of time in which the technician is scheduled to arrive at the site. This window is typically larger than the Scheduled Start and End window to allow time for delays and scheduling changes. You may choose to share the Arrival Window Start and End with the customer, but keep the Scheduled Start and End internal-only.
ArrivalWindowStartTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The beginning of the window of time in which the technician is scheduled to arrive at the site. This window is typically larger than the Scheduled Start and End window to allow time for delays and scheduling changes. You may choose to share the Arrival Window Start and End with the customer, but keep the Scheduled Start and End internal-only.
BundlePolicyId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Reference to the bundle policy associated with this service appointment. This is a relationship field. Relationship Name BundlePolicy Relationship Type Lookup Refers To ApptBundlePolicy

Field Name	Details
City	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The city where the appointment is completed. Maximum length is 40 characters.
ContactId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The contact associated with the parent record. If needed, you can manually update the service appointment contact. This is a relationship field. Relationship Name Contact Relationship Type Lookup Refers To Contact
Country	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The country where the work order is completed. Maximum length is 80 characters.
Description	Type textarea Properties Create, Nillable, Update Description The description of the appointment.
DueDate	Type dateTime Properties Create, Filter, Sort, Update

Field Name	Details
	Description The date by which the appointment must be completed. Earliest Start Permitted and Due Date typically reflect terms in the customer's service-level agreement.
Duration	Type double Properties Create, Nillable, Filter, Sort, Update Description The estimated length of the appointment. If the parent record is work order or work order line item, the appointment inherits its parent's duration, but it can be manually updated. The duration is in minutes or hours based on the value selected in the <code>Duration Type</code> field.
DurationType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The unit of the Duration: Minutes or Hours.
EarliestStartTime	Type dateTime Properties Create, Filter, Sort, Update Description The date after which the appointment must be completed. Earliest Start Permitted and Due Date typically reflect terms in the customer's service-level agreement.
GeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The level of accuracy of a location's geographical coordinates compared with its physical address. Usually provided by a geocoding service based on the address's latitude and longitude coordinates. This field is available in the API only.
IsAnonymousBooking	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field Name	Details
	Description Indicates whether a service resource was automatically assigned to the appointment. The default value is false. This field is available in API version 49.0 and later.
IsBundle	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if this service appointment is a bundle service appointment. The default value is false. This field is available in API version 54.0 and later.
IsBundleMember	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if this service appointment is a bundle member service appointment. The default value is false. This field is available in API version 54.0 and later.
IsManuallyBundled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if this bundle was created manually. The default value is false. This field is available in API version 54.0 and later.
IsOffsiteAppointment	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Any type of work that can be done remotely. This field is available in API version 58.0 and later.
LastReferencedDate	Type dateTime

Field Name	Details
	Properties Filter, Nillable, Sort Description The date when the service appointment was last modified. Its label in the user interface is <code>Last Modified Date</code>.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the service appointment was last viewed.
Latitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>Longitude</code> to specify the precise geolocation of the address where the service appointments is completed. Acceptable values are numbers between -90 and 90 with up to 15 decimal places. To integrate data from an external data source for latitude, map your data to the <code>ServiceAppointment.Latitude</code> and not the <code>ServiceAppointment.FSL__InternalSLRGeolocation__Latitude__s</code> field. This field is available in the API only.
Longitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>Latitude</code> to specify the precise geolocation of the address where the service appointment is completed. Acceptable values are numbers between -180 and 180 with up to 15 decimal places. To integrate data from an external data source for longitude, map your data to the <code>ServiceAppointment.Longitude</code> and not the <code>ServiceAppointment.FSL__InternalSLRGeolocation__Longitude__s</code> field. This field is available in the API only.

Field Name	Details
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the service appointment. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ParentRecordId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The parent record associated with the appointment. The parent record can't be updated after the service appointment is created. This is a polymorphic relationship field. Relationship Name ParentRecord Relationship Type Lookup Refers To Account, Asset, Lead, Opportunity, ServiceAppointmentGroup, WorkOrder, WorkOrderLineItem
ParentRecordStatusCategory	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description (Read only) The <code>Status Category</code> of the parent record. If the parent record is a work order or work order line item, this field is populated; otherwise, it remains blank.
ParentRecordType	Type string

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description (Read only) The type of parent record: Account, Asset, Lead, Opportunity, Work Order, or Work Order Line Item.
PostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The postal code where the work order is completed. Maximum length is 20 characters.
RelatedBundleId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The bundle that this service appointment is a member of. This is a relationship field. Relationship Name RelatedBundle Relationship Type Lookup Refers To ServiceAppointment
SchedEndTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The time at which the appointment is scheduled to end. If you are using the Field Service managed package with the scheduling optimizer, this field is populated once the appointment is assigned to a resource. <code>Scheduled End - Scheduled Start = Estimated Duration</code> .
SchedStartTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update

Field Name	Details
	Description The time at which the appointment is scheduled to start. If you are using the Field Service managed package with the scheduling optimizer, this field is populated once the appointment is assigned to a resource.
ServiceDocumentTemplate	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The template ID which sets the template for each service document for the Document Builder feature.
ServiceTerritoryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The service territory associated with the appointment. If the parent record is a work order or work order line item, the appointment inherits its parent's service territory. This is a relationship field. Relationship Name ServiceTerritory Relationship Type Lookup Refers To ServiceTerritory
State	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The state where the service appointment is completed. Maximum length is 80 characters.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The status of the appointment. The picklist includes the following values, which can be customized: • <code>None</code>—Default value. • <code>Scheduled</code>—Appointment has been assigned to a service resource. • <code>Dispatched</code>—Assigned service resource has been notified about their assignment. • <code>In Progress</code>—Work has begun. • <code>Completed</code>—Work is complete. • <code>Cannot Complete</code>—Work could not be completed. • <code>Canceled</code>—Work is canceled, typically before any work began While you can set the status to null via the API, setting the status to null returns an error. To prevent errors, use one of the picklist values.
StatusCategory	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The category that each <code>Status</code> value falls into. The <code>Status Category</code> field's values are identical to the default <code>Status</code> values. If you create custom <code>Status</code> values, you must indicate which category it belongs to. For example, if you create a <code>Customer Absent</code> value, you may decide that it belongs in the <code>Cannot Complete</code> category. To learn which processes reference <code>StatusCategory</code>, see How are Status Categories Used?
Street	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The street number and name where the service appointment is completed.
Subject	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A short phrase describing the appointment.

Field Name	Details
Transaction	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The last transaction ID of the scheduling and optimization request that updated this object. The transaction ID is automatically generated and populated by the Enhanced Scheduling and Optimization engine. Available in API version 63.0 and later.
WorkTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The work type associated with the service appointment. The work type is inherited from the appointment's parent record if the parent is a work order or work order line item. If Lightning Scheduler is also in use, this field is editable. However, users see an error if they update it to list a different work type than the parent record's work type. This is a relationship field. Relationship Name WorkType Relationship Type Lookup Refers To WorkType

Usage

Service appointments always have a parent record, which can be a work order, work order line item, opportunity, account, or asset. The type of parent record tells you about the nature of the service appointment:

- Service appointments on *work orders* and *work order line items* offer a more detailed view of the work being performed. While work orders and work order line items let you enter general information about a task, service appointments are where you add the details about scheduling and ownership.
- Service appointments on *assets* represent work being performed on the asset.
- Service appointments on *accounts* represent work being performed for the account.
- Service appointments on *opportunities* represent work that is related to the opportunity.
- Service appointments on *leads* represent work that is related to lead—for example, a site visit to pursue a promising lead.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ServiceAppointmentChangeEvent (API version 48.0)

Change events are available for the object.

ServiceAppointmentFeed

Feed tracking is available for the object.

ServiceAppointmentHistory

History is available for tracked fields of the object.

ServiceAppointmentOwnerSharingRule

Sharing rules are available for the object.

ServiceAppointmentShare

Sharing is available for the object.

ServiceAppointmentStatus

Represents a possible status of a service appointment in field service.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
ApiName	Type string Properties Filter, Group, idLookup, Sort Description The API name of the status value.
IsDefault	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field Name	Details
	Description Indicates that the status value is the default status on service appointments. Only one status value can be the default.
MasterLabel	Type string Properties Filter, Group, Nillable, Sort Description The label for the picklist value that appears in the UI.
SortOrder	Type int Properties Filter, Group, Nillable, Sort Description The value's position in the drop-down list of values in the UI.
StatusCode	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The status category that the value corresponds to. The Status Category field has seven values which are identical to the default Status values.

Usage

The Status field on service appointments comes with the following values:

- None—Default value.
- Scheduled—Appointment has been assigned to a service resource.
- Dispatched—Assigned service resource has been notified about their assignment.
- In Progress—Work has begun.
- Completed—Work is complete.
- Cannot Complete—Work could not be completed.
- Canceled—Work is canceled, typically before any work began
- CheckedIn—The customer has arrived for their scheduled appointment.

 **Important:** While you can set the status to null via the API, setting the status to null returns an error. To prevent errors, use one of the documented picklist values.

The ServiceAppointmentStatus object corresponds to the Status field. Adding a value to the Status field—for example, Waiting—creates a service appointment status record, and vice versa.



Note: Service appointments also come with a StatusCategory field whose values are identical to the default Status values. If you create custom Status values, you must indicate which category it belongs to. For example, if you create a *Customer Absent* value, you may decide that it belongs in the *Cannot Complete* category. To learn which processes reference StatusCategory, see [How are Status Categories Used?](#)

ServiceChannel

Represents a channel of work items that are received from your organization—for example, cases, chats, or leads. This object is available in API version 32.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.

As of Spring '20 and later, only authenticated internal and external users can access this object.

Fields

Field	Details
AcwExtensionDuration	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The maximum length of time, measured in seconds, an agent can spend on After Conversation Work (ACW) each time they extend the timer. You must set this field if <code>HasAcwExtensionEnabled</code> is set to <code>true</code>. Specify a value from 10 through 3600. Available only for service channels of type Messaging or Voice.
AfterConvoWorkMaxTime	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The maximum length of time, measured in seconds, an agent has to complete After Conversation Work (ACW). You must set this field if <code>HasAfterConvoWorkTimer</code> is set to <code>true</code>. Specify a value from 10 through 3600. Available only for service channels of type Messaging or Voice.

Field	Details
	For service channels of type Voice, this field is available in API version 52.0 and later. For service channels of type Messaging, this field is available in API version 56.0 and later.
CapacityModel	Type picklist Properties Create, Filter, Group, Nillable, RestrictedPicklist, Sort, Update Description The method that determines when an agent's capacity for a work item is released. With the Status-Based capacity routing model, work remains assigned and applied to an agent's capacity until the work is completed or reassigned to a different agent. In contrast, the tab-based capacity model releases an agent's capacity when a work tab is closed in the service console. Possible values are StatusBased and TabBased.
CustomSoundId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Relationship Name CustomSound Relationship Type Lookup Refers To StaticResource Description The ID of the static resource for the custom sound selected to play for the PresenceUserConfig object.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. When creating large sets of data, always specify a unique DeveloperName for each record. If no DeveloperName is specified, performance slows down while Salesforce generates one for each record.

Field	Details
DoesCheckCapOnOwnerChange	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description In the Status-Based capacity routing model, when work is reassigned to a specific agent, you can choose to override the capacity check and keep the work assigned to the agent. The default value is <code>false</code>.
DoesCheckCapOnStatusChange	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description In the Status-Based capacity routing model, when work is reopened, you can choose to override the capacity check keep the work assigned to a specific agent. The default value is <code>false</code>.
DoesMinimizeWidgetOnAccept	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Automatically minimizes the Omni-Channel widget when an agent accepts work. The default value is <code>false</code>.
DoesOverridePresenceAudio	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Service channel settings override the audio settings for each agent's presence configuration. The default value is <code>false</code>.
HasAcwExtensionEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If set to <code>true</code>, agents can extend their After Conversation Work (ACW) time. Available only if <code>HasAfterConvoWorkTimer</code> is set to <code>true</code>. If set to <code>true</code>, you must also set the

Field	Details
	<code>AcwExtensionDuration</code> and <code>MaxExtensions</code> fields. The default value is <code>false</code>. Available only for service channels of type Messaging or Voice. This field is available in API version 56.0 and later.
<code>HasAfterConvoWorkTimer</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If set to <code>true</code>, After Conversation Work (ACW) time can be configured for the channel. If set to <code>true</code>, you must also set the <code>AfterConvoWorkMaxTime</code> field. The default value is <code>false</code>. Available only for service channels of type Messaging or Voice. For service channels of type Voice, this field is available in API version 52.0 and later. For service channels of type messaging, this field is available in API version 56.0 and later.
<code>HasAutoAcceptEnabled</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Work items in a service channel open automatically in the agent's workspace so that the agent doesn't have to manually accept them. The default value is <code>false</code>.
<code>Language</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the service channel.
<code>MasterLabel</code>	Type string Properties Create, Filter, Group, Sort, Update Description The label of the service channel.
<code>MaxExtensions</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description The maximum number of times an agent can extend their After Work Conversation (ACW) time. Specify a value from 1 through 10. You must set this field if <code>HasAcwExtensionEnabled</code> is set to <code>true</code>. Available only for service channels of type Messaging or Voice. This field is available in API version 56.0 and later.
RelatedEntity	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of object that's associated with this service channel. This field is unique within your organization.
RoutingConfigurationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Relationship Name RoutingConfiguration Refers To QueueRoutingConfig Description The ID of the routing configuration. This field is a relationship field. This field is available in API version 63.0 and later.
SecRoutingPriorityField	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The name of the standard field or the id of the custom field that is used for secondary routing priority. This field is unique within your organization.
SoundLength	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The length of time that a sound plays when new work is assigned to an agent.

Field	Details
StatusField	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The picklist field that you use to track work status in the Status-Based capacity routing model. Use ServiceChannelStatusField to specify the values that indicate completed and in-progress work-item status.

ServiceChannelFieldPriority

Represents a secondary routing priority field-value mapping. This object is available in API version 47.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.

Fields

Field	Details
Priority	Type int Properties Create, Filter, Group, Sort, Update Description The priority number assigned to the mapped field value.
ServiceChannelId	Type reference Properties Create, Filter, Group, Sort Description The ID of the service channel.
Value	Type string

Field	Details
	Properties Create, Filter, Group, Sort, Update
	Description The value of the SecRoutingPriorityField field defined in parent ServiceChannel.

ServiceChannelStatus

Represents the status that's associated with a specific service channel. This object is available in API version 32.0 and later.

Supported Calls

`create()`, `delete()`, `query()`, `update()`, `retrieve()`

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.

As of Spring '20 and later, only authenticated internal and external users can access this object.

Fields

Field	Details
ServiceChannelId	Type reference
	Properties Create, Filter, Group, Sort
	Description The ID of the service channel.
ServicePresenceStatusId	Type reference
	Properties Create, Filter, Group, Nillable, Sort
	Description The ID of the presence status that's associated with the service channel that's specified by the <code>ServicePresenceChannelId</code> .

ServiceChannelStatusField

Represents the values that you use to indicate completed and in-progress work item status for the status field in the Status-Based Capacity routing model. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, [Omni-Channel](#) and Status-Based Capacity Model must be enabled.

Fields

Field	Details
ServiceChannelId	Type reference Properties Create, Filter, Group, Sort Description The ID of the service channel.
Type	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description For the field that you use to track work status, specifies whether the values are for completed or in-progress work.
Value	Type string Properties Create, Filter, Group, Sort Description Specifies the values that you use to indicate completed and in-progress work status. Valid values are <code>Completed</code>, <code>InProgress</code>, and <code>Paused</code>.

ServiceContract

Represents a customer support contract (business agreement). This object is available in API version 18.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AccountId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the account associated with the service contract.
ActivationDate	Type dateTime Properties Filter, Nillable, Sort Description The initial day the service contract went into effect (whereas <code>StartDate</code> may include a renewal date).
AdditionalDiscount	Type percent Properties Create, Filter, Nillable, Sort, Update Description Extra discount percentage for the service contract. Available in API version 55.0 and later.
ApprovalStatus	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Sort Description Approval status of the service contract.

Field	Details
BillingAddress (beta)	Type address Properties Filter, Nillable Description The compound form of the billing address. Read-only. See Address Compound Fields for details on compound address fields.
BillingCity	Type string Properties Filter, Group, Nillable, Sort Description Details for the billing address. Maximum size is 40 characters.
BillingCountry	Type string Properties Filter, Group, Nillable, Sort Description Details for the billing address. Maximum size is 40 characters.
BillingCountryCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO country code for the service contract's billing address.
BillingLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>BillingLongitude</code> to specify the precise geolocation of a billing address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places.
BillingLongitude	Type double Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description Used with <code>BillingLatitude</code> to specify the precise geolocation of a billing address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places.
<code>BillingPostalCode</code>	Type string Properties Filter, Group, Nillable, Sort Description Details for the billing address. Maximum size is 20 characters.
<code>BillingState</code>	Type string Properties Group, Sort, Filter, Nillable Description Details for the billing address. Maximum size is 20 characters.
<code>BillingStateCode</code>	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO state code for the service contract's billing address.
<code>BillingStreet</code>	Type textarea Properties Filter, Group, Nillable, Sort Description Street address for the billing address.
<code>ContactId</code>	Type reference Properties Filter, Group, Nillable, Sort Description Required. ID of the Contact associated with the service contract. Must be a valid ID.
<code>ContractNumber</code>	Type string

Field	Details
	Properties Autonumber, Defaulted on create, Filter, Sort Description Unique number automatically assigned to the service contract.
Description	Type textarea Properties Nillable Description Description of the service contract.
Discount	Type percent Properties Filter, Nillable, Sort Description Discount percentage for the service contract.
EndDate	Type date Properties Filter, Group, Nillable, Sort Description The last day the service contract is in effect.
GrandTotal	Type currency Properties Filter, Nillable, Sort Description Total price of the service contract plus shipping and taxes.
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted .

Field	Details
LastReferencedDate	Type date Properties Filter, Nillable, Sort, Update Description The timestamp when the current user last interacted with this record, directly or indirectly. Some sample scenarios are:
LastViewedDate	Type date Properties Filter, Nillable, Sort, Update Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (LastReferencedDate), but not viewed it.
LineItemCount	Type int Properties Filter, Nillable, Group, Sort Description Number of ContractLineItem records associated with the service contract.
Name	Type string Properties Create, Filter, Group, Sort, Update Description Name of the service contract.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who currently owns the service contract.
ParentServiceContractId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The service contract's parent service contract, if it has one.
Pricebook2Id	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the Pricebook2 associated with the service contract. Must be a valid ID.
RootServiceContractId	Type reference Properties Filter, Group, Nillable, Sort Description (Read only) The top-level service contract in a service contract hierarchy. Depending on where a service contract lies in the hierarchy, its root could be the same as its parent.
ShippingAddress (beta)	Type address Properties Filter, Nillable Description The compound form of the shipping address. Read-only. See Address Compound Fields for details on compound address fields.
ShippingCity	Type string Properties Filter, Group, Nillable, Sort Description Details of the shipping address. Maximum size is 40 characters.
ShippingCountry	Type string Properties Filter, Group, Nillable, Sort Description Details of the shipping address. Country maximum size is 40 characters.
ShippingCountryCode	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO country code for the service contract's shipping address.
ShippingLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>ShippingLongitude</code> to specify the precise geolocation of a shipping address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places.
ShippingLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>ShippingLatitude</code> to specify the precise geolocation of an address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places.
ShippingPostalCode	Type string Properties Create, Filter, Nillable, Update Description Details of the shipping address. Postal code maximum size is 20 characters.
ShippingState	Type string Properties Create, Filter, Nillable, Update Description Details of the shipping address. State maximum size is 20 characters.
ShippingStateCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO state code for the service contract's shipping address.

Field	Details
ShippingStreet	Type textarea Properties Create, Filter, Nillable, Update Description The street address of the shipping address. Maximum of 255 characters.
SpecialTerms	Type textarea Properties Create, Nillable, Update Description Any terms specifically agreed to and tracked in the service contract.
StartDate	Type date Properties Create, Filter, Nillable, Update Description The first day the service contract is in effect.
Status	Type picklist Properties Filter, Nillable Description The status of the service contract, such as Inactive.
Subtotal	Type currency Properties Filter, Nillable Description Total of the service contract line items (products) before discounts, taxes, and shipping are applied.
Tax	Type currency Properties Create, Filter, Nillable, Update

Field	Details
	Description Total taxes for the service contract.
Term	Type int Properties Create, Filter, Nillable, Update Description Number of months that the service contract is valid.
TotalPrice	Type currency Properties Filter, Nillable Description Total of the contract line items (products) after discounts and before taxes and shipping.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ServiceContractChangeEvent (API version 44.0)

Change events are available for the object.

ServiceContractFeed (API version 23.0)

Feed tracking is available for the object.

ServiceContractHistory

History is available for tracked fields of the object.

ServiceContractOwnerSharingRule

Sharing rules are available for the object.

ServiceContractShare

Sharing is available for the object.

SEE ALSO:

[ServiceContractOwnerSharingRule](#)

ServiceContractOwnerSharingRule

Represents the rules for sharing a ServiceContract (customer service agreement) with users other than the owner. This object is available in API version 18.0 and later.

 **Note:** To enable access to this object for your org, contact Salesforce customer support. However, we recommend that you instead use Metadata API to programmatically update owner sharing rules because it triggers automatic sharing rule recalculation. The [SharingRules](#) Metadata API type is enabled for all orgs.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
AccessLevel	Type picklist Properties Create, Filter, Group, Sort, Update Description A value that represents the type of sharing allowed. The possible values are: • Read • Edit
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description A description of the sharing rule. Maximum size is 1000 characters. This field is available in API version 29.0 and later.
DeveloperName	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Corresponds to Rule Name in the user interface. This field is available in API version 24.0 and later. When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no

Field Name	Details
	<code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
GroupId	Type reference Properties Create, Filter, Group, Sort, Description The ID representing the source group. Service contracts owned by users in the source group trigger the rule to give access.
Name	Type string Properties Create, Filter, Group, Sort, Update Description Label of the sharing rule as it appears in the user interface. Limited to 80 characters. Corresponds to Label in the user interface.
UserorGroupId	Type reference Properties Create, Filter Description The ID representing the target user or group. Target users or groups are given access.

Usage

Use this object to manage the sharing rules for a service contract. General sharing and territory management-related sharing use this object.

SEE ALSO:

[ServiceContract](#)

[Metadata API Developer Guide: SharingRules](#)

ServiceCrew

Represents a group of service resources who can be assigned to service appointments as a unit.

A service crew is a group of service resources whose combined skills and experience make them a good fit to work together on appointments. For example, a wellhead repair crew might include a hydrologist, a mechanical engineer, and an electrician.

Service appointments can only be assigned to service resources. To assign a service crew to service appointments, you must create a service resource with a resource type of Crew that represents the crew, then use the resource for assignment purposes.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
CrewSize	Type int Properties Create, Filter, Group, Sort, Update Description The number of members on the crew. This field is manual, so it doesn't auto-update when you add or remove members.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the service crew was last modified. Its label in the user interface is <code>Last Modified Date</code>.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the service crew was last viewed.
Name	Type string Properties Create, Filter, Group, Sort, Update

Field Name	Details
	Description The name of the service crew. For example, Repair Crew.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The crew owner. By default, the owner is the person who created the service crew.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ServiceCrewChangeEvent \(API version 48.0\)](#)

Change events are available for the object.

[ServiceCrewFeed](#)

Feed tracking is available for the object.

[ServiceCrewHistory](#)

History is available for tracked fields of the object.

[ServiceCrewOwnerSharingRule](#)

Sharing rules are available for the object.

[ServiceCrewShare](#)

Sharing is available for the object.

ServiceCrewMember

Represents a technician service resource that belongs to a service crew.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
EndDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The last day that the service resource belongs to the crew. You can use this field to track employment dates for contractors.
IsLeader	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates that the member is the crew leader.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the service crew member was last modified. Its label in the user interface is <code>Last Modified Date</code>.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the service crew member was last viewed.
ServiceCrewId	Type reference Properties Create, Filter, Group, Sort Description The crew that the service resource belongs to.
ServiceCrewMemberNumber	Type string

Field Name	Details
	Properties Autonumber, Defaulted on create, Filter, Sort
	Description An auto-generated number identifying the service crew member.
ServiceResourceId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The service resource that belongs to the crew. Only service resources whose resource type is Technician can be added to service crews.
StartDate	Type dateTime
	Properties Create, Filter, Sort, Update
	Description Required. The day the service resource joins the crew. Service resources can belong to multiple crews as long as their start and end dates don't overlap.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ServiceCrewMemberChangeEvent](#) (API version 48.0)

Change events are available for the object.

[ServiceCrewMemberFeed](#)

Feed tracking is available for the object.

[ServiceCrewMemberHistory](#)

History is available for tracked fields of the object.

ServiceCrewOwnerSharingRule

Represents the rules for sharing a service crew with user records other than the owner or anyone above the owner in the role hierarchy.



Note: To enable access to this object for your org, contact Salesforce customer support. However, we recommend that you instead use Metadata API to programmatically update owner sharing rules because it triggers automatic sharing rule recalculation. The [SharingRules](#) Metadata API type is enabled for all orgs.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description A description of the sharing rule. Maximum size is 1000 characters.
DeveloperName	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Corresponds to Rule Name in the user interface.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
GroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the source group. A service crew owned by a User in the source Group triggers the rule to give access.
Name	Type string

Field	Details
	Properties Create, Filter, Group, Sort, Update
	Description Label of the sharing rule as it appears in the user interface. Limited to 80 characters. Corresponds to Label on the user interface.
ServiceResourceAccessLevel	Type picklist
	Properties Create, Filter, Group, Restricted picklist, Sort, Update
	Description A value that represents the type of access granted to the target Group, or UserRole. The possible values are: • Read • Edit • All
UserOrGroupId	Type reference
	Properties Create, Filter, Group, Sort
	Description The ID representing the User or Group being granted access.

ServicePresenceStatus

Represents a presence status that can be assigned to a service channel. This object is available in API version 32.0 and later.

Supported Calls

`create()`, `query()`, `update()`, `retrieve()`

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.

As of Spring '20 and later, only authenticated internal and external users can access this object.

Fields

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record. Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The language of the presence status.
MasterLabel	Type string Properties Create, Filter, Group, Sort Description The label of the presence status.

ServiceReport

Represents a report that summarizes a work order, work order line item, or service appointment.

The fields that appear on a service report are determined by its service report template. Service reports can be signed by the customer and shared as a PDF.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()` `update()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
ContentVersionDocumentId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the service report version, used for storage.
DocumentBody	Type base64 Properties Create, Nillable Description The report output. <code>DocumentBody</code> can't be retrieved via REST API.
DocumentContentType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The type of data used for the report output.. Possible values are: • audio/ogg • text/calendar • video/3gpp2 • video/3gpp • image/avif • text/calendar • audio/x-caf • image/webp

Field Name	Details
DocumentLength	Type int Properties Filter, Group, Nillable, Sort Description The length of the report output.
DocumentName	Type string Properties Create, Filter, Group, Nillable, Sort Description The name of the report output, always set to Service Report.
DocumentTemplate	Type string Properties Create, Filter, Group, Nillable, Sort Description The template used to generate service documents for the Document Builder feature.  Important: DocumentTemplate is different from Template. The document template needs to reference a flexipage that is of type serviceDocument and must target the object used to generate the service document. For example, you can't use an Account flexipage for a service report tied to a work order.
IsSigned	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether the service report contains one or more signatures. This field isn't supported for Document Builder.  Tip: Add this field to the Service Reports related list on work orders, work order line items, and service appointments.
ParentId	Type reference Properties Create, Filter, Group, Sort

Field Name	Details
	Description The ID of the service appointment, work order, or work order line item that the service report summarizes. For example, if you click Create Service Report on a service appointment, this field lists the service appointment's record ID.
ServiceReportLanguage	Type picklist Properties Create, Filter, Group, Nillable, Sort, Restricted picklist Description The language used for the service report. The language is selected in the <code>ServiceReportLanguage</code> field on the associated work order. If the work order doesn't specify a service report language, the report is translated in the default language in Salesforce of the person generating the report.
ServiceReportNumber	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description An auto-generated number identifying the service report.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The status of the service report. Available in API version 53.0 and later. Possible values are: - Completed - Failed - Generating - In Progress - None - Queued The default value is <code>None</code>.
Template	Type string Properties Create, Filter, Group, Nillable, Sort

Field Name	Details
	Description The service report template used to generate the service report.  Note: If the person creating the service report doesn't have access to certain objects or fields that are included in the service report template, those fields aren't visible in the report they create.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[ServiceReportChangeEvent](#) on page 68

Change events are available for the object. Available in API version 55.0 and later.

[ServiceReportHistory](#)

History is available for tracked fields of the object.

ServiceReportLayout

Represents a service report template in field service.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Field Service must be enabled. All users with Field Service Standard user permission can view the ServiceReportLayout object via the API.

Fields

Field Name	Details
DeveloperName	Type string Properties Filter, Group, Sort Description The developer name of the service report template.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.

Field Name	Details
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The language that the service report template uses.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the service report template was last viewed.
MasterLabel	Type string Properties Filter, Group, Sort Description The name of the service report template. For example, Maintenance Report Template.
TemplateType	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The type of the service report template. Available in API version 46.0 and later. Possible values are: • DigitalForm • ServiceReport The default value is <code>ServiceReport</code>.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ServiceReportLayoutChangeEvent](#) on page 68

Change events are available for the object. Available in API version 55.0 and later.

ServiceRequest

Represents a formal request from a user for something to be provided, such as access, information, hardware, or software. This object manages the lifecycle of these tasks, which are typically low-risk, and can be fulfilled through a defined, repeatable process. For example, a Service Request can be created for an employee requesting a new laptop or a student needing a transcript. This object is available in API version 66.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AssignedGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the user group assigned to the service request. This field is a relationship field. Relationship Name AssignedGroup Refers To Group
AssignedUserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the user assigned to the service request. This field is a relationship field. Relationship Name AssignedUser Refers To User
BusinessHoursId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description ID for the business hours used to determine the SLA calculation. This field is a relationship field. Relationship Name BusinessHours Refers To BusinessHours
ClosedDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date when the service request was closed.
Description	Type textarea Properties Create, Nillable, Update Description A detailed description of the service request.
IsClosed	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if the service request is closed (true) or not (false). The default value is false. The default value is <code>false</code>.
IsPaused	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if the SLA timer is paused (true) or not (false). The default value is false. The default value is <code>false</code>.

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record
MilestoneStatus	Type string Properties Group, Nillable, Sort Description Information about the milestone the service request reached.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the service request record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the user who created the record. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User

Field	Details
ParentServiceRequestId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the parent request that this service request belongs to. This field is a relationship field. Relationship Name ParentServiceRequest Refers To ServiceRequest
Priority	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Priority of a service request. Valid values are: • High • Medium • Low The default value is Low.
ReportedById	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the person who reported the service request. This field is a polymorphic relationship field. Relationship Name ReportedBy Refers To Account, User
ResolutionDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description The date and time when the service request was resolved.
ResolutionSummary	Type textarea Properties Create, Nillable, Update Description Resolution summary for the service request.
SlaEndDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the SLA timer ended.
SlaPauseDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the SLA timer was paused.
SlaStartDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time when the SLA timer started.
Status	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Specifies the status of a service request.
StatusCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description The code that displays the status of the service request lifecycle. Valid values are: • Closed • Canceled • InProgress • New • OnHold • Resolved The default value is New.
Subject	Type string Properties Create, Filter, Group, Sort, Update Description A short description of the service request.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ServiceRequestFeed](#) on page 55

Feed tracking is available for the object.

[ServiceRequestHistory](#)

History is available for tracked fields of the object.

[ServiceRequestShare](#)

Sharing is available for the object.

ServiceResource

Represents a service technician or service crew in Field Service and Salesforce Scheduler, or an agent in Workforce Engagement. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

Field Service or Workforce Engagement must be enabled.

Fields

Field Name	Details
Description	Type textarea Properties Create, Nillable, Update Description The description of the resource.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description When selected, this option means that the resource can be assigned to work orders. For service tracking purposes, resources can't be deleted, so deactivating a resource is the best way to send them into retirement. Deactivating a user doesn't deactivate the related service resource. You can't create a service resource that is linked to an inactive user.
IsCapacityBased	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Capacity-based resources are limited to a certain number of hours or appointments in a specified time period. The Capacities related list shows a resource's capacity.
IsOptimizationCapable	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description This field is reserved for Field Service and the managed package. Create a custom field instead of using this field to include a service resource in optimization.

Field Name	Details
LastKnownLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description The latitude of the last known location.
LastKnownLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description The longitude of the last known location.
LastKnownLocation	Type location Properties Nillable Description The service resource's last known location. You can configure this field to display data collected from a custom mobile app. This field isn't visible in the user interface, but you can expose it on service resource page layouts or set up field tracking to be able to view a resource's location history.
LastKnownLocationDate	Type dateTime Properties Filter, Nillable, Sort, Update Description The date and time of the last known location.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the service resource was last modified. Its label in the user interface is Last Modified Date.
LastViewedDate	Type dateTime

Field Name	Details
	Properties Filter, Nillable, Sort Description The date when the service resource was last viewed.
LocationId	Type reference Properties Create, Filter, Group, Sort, Nillable, Update Description The location associated with the service resource. For example, a service vehicle driven by the service resource. LocationId is a relationship field. Relationship Name Location Relationship Type Lookup Refers To Location
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The resource's name, for example the name or title of the associated user or service crew.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the service resource. OwnerId is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Field Name	Details
RelatedRecordId	Type reference Properties Create, Filter, Group, Sort, Nillable, Update Description The associated user. Its label in the UI is <code>User</code>. If the service resource represents a service crew rather than a user, leave the <code>User</code> field blank and select the related crew in the <code>ServiceCrewId</code> field. RelatedRecordId is a relationship field. Relationship Name RelatedRecord Relationship Type Lookup Refers To User
ResourceType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates whether the resource is a Technician (T), Dispatcher (D), Crew (C), Asset (S), Agent (A), or Planner (P). The default value is Technician (T). Resources who are dispatchers can't be capacity-based or included in scheduling optimization. Only users with the Field Service Dispatcher permission-set license can be dispatchers. You can't add additional resource types. To create a dependent lookup filter with <code>ServiceResource.ResourceType</code>, use only the first letter of the picklist value, for example T for Technician.
ServiceCrewId	Type reference Properties Create, Filter, Group, Sort, Nillable, Update Description The associated service crew. If the service resource represents a crew, select the crew. This field is hidden for all users by default. To use it, update its field-level security settings in Setup and add it to your service resource page layouts.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ServiceResourceChangeEvent (API version 48.0)

Change events are available for the object.

ServiceResourceFeed

Feed tracking is available for the object.

ServiceResourceHistory

History is available for tracked fields of the object.

ServiceResourceOwnerSharingRule

Sharing rules are available for the object.

ServiceResourceShare

Sharing is available for the object.

ServiceResourceCapacity

Represents the maximum number of scheduled hours or number of service appointments that a capacity-based service resource can complete within a specific time period. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
CapacityInHours	Type double Properties Create, Filter, Nillable, Sort, Update Description The number of hours that the resource can work per time period. You must fill out this field, the <code>CapacityInWorkItems</code> field, or both.
CapacityInWorkItems	Type int

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The total number of service appointments that the resource can complete per time period. You must fill out this field, the <code>CapacityInHours</code> field, or both.
<code>CapacityNumber</code>	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description (Read only) An auto-generated number identifying the capacity record.
<code>EndDate</code>	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date the capacity ends; for example, the end date of a contract.
<code>LastReferencedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
<code>LastViewedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (<code>LastReferencedDate</code>) and not viewed.
<code>ServiceResourceId</code>	Type reference Properties Create, Filter, Group, Sort

Field Name	Details
	Description The associated service resource. You can set multiple capacities for a resource as long as their start and end dates do not overlap.
StartDate	Type date Properties Create, Filter, Group, Sort Description The date the capacity goes into effect.
TimePeriod	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Days, Hours, or Months. For example, if a resource can work 80 hours per month, the capacity's <code>Time Period</code> would be <code>Month</code> and <code>Hours per Time Period</code> would be <code>80</code> .

Usage

Service resources who are capacity-based can only work a certain number of hours or complete a certain number of service appointments within a specified time period. Contractors tend to be capacity-based. To indicate that a service resource is capacity-based, select **Capacity-Based** on the service resource record, then create a capacity record for the service resource.

You must fill out at least one of these fields: `CapacityInWorkItems` and `CapacityInHours`. If you're using the Field Service managed package and would like to measure capacity both in hours and in number of work items, enter a value for both. The resource is considered to reach their capacity based on whichever term is met first—hours or number of work items.

 **Important:** If you aren't using the Field Service managed package, capacity serves more as a suggestion than a rule. Resources can still be as scheduled beyond their capacity, and you aren't notified when a resource exceeds their capacity.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[ServiceResourceCapacityChangeEvent](#) (API version 54.0)

Change events are available for the object.

[ServiceResourceCapacityFeed](#)

Feed tracking is available for the object.

[ServiceResourceCapacityHistory](#)

History is available for tracked fields of the object.

ServiceResourceCapacityHistory

Represents the history of changes made to tracked fields on a service resource capacity record. This object is available in API version 38.0 and later.

Supported Calls

`getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Special Access Rules

Field Service must be enabled in your organization, and field tracking for service resource capacity fields must be configured.

Fields

Field Name	Details
<code>DataType</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Data type of the field that was changed.
<code>Field</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The name of the field that was changed.
<code>NewValue</code>	Type anyType Properties Nillable, Sort Description The new value of the field that was changed.
<code>OldValue</code>	Type anyType Properties Nillable, Sort

Field Name	Details
	Description The value of the field before it was changed.
ServiceResourceCapacityId	Type reference Properties Filter, Group, Sort Description ID of the service resource capacity being tracked. The history is displayed on the detail page for this record.

ServiceResourceDataTranslation

Represents the translated values of the data stored within a [ServiceResource](#) record's fields. This object is available in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- Your organization must be using Enterprise, Performance, Unlimited, or Developer edition.
- Translation Workbench and data translation must be enabled in your org.
- To view this object, you must have the "View Setup and Configuration" permission

Fields

Field	Details
Description	Type textarea Properties Create, Nillable, Update Description The translated value for the ServiceResource description.
IsOutOfDate	Type boolean

Field	Details
	Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the translation is out-of-date (<code>true</code>) or current (<code>false</code>). A translation is out-of-date if the parent ServiceResource record is updated after the last translation was filed.
Language	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The language for these translated values.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The translated value for the ServiceResource record name. This field is required to translate the text in other fields.
ParentId	Type reference Properties Create, Filter, Group, Sort, Update Description The record ID of the ServiceResource associated with the data that is being translated.

Usage

Use this object to translate the data stored in a ServiceResource record into the different languages supported by Salesforce. If data translation is enabled for custom fields on the ServiceResource object, additional ServiceResourceDataTranslation fields exist for translating the data contained within those fields.

You can't use a custom external id field in an upsert call for a ServiceResourceDataTranslation object.

ServiceResourceOwnerSharingRule

Represents the rules for sharing a service resource with user records other than the owner or anyone above the owner in the role hierarchy. This object is available in API version 38.0 and later.

 **Note:** To enable access to this object for your org, contact Salesforce customer support. However, we recommend that you instead use Metadata API to programmatically update owner sharing rules because it triggers automatic sharing rule recalculation. The [SharingRules](#) Metadata API type is enabled for all orgs.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description A description of the sharing rule. Maximum size is 1000 characters.
DeveloperName	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Corresponds to Rule Name in the user interface.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
GroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the source group. A service resource owned by a User in the source Group triggers the rule to give access.

Field	Details
Name	Type string Properties Create, Filter, Group, Sort, Update Description Label of the sharing rule as it appears in the user interface. Limited to 80 characters. Corresponds to Label on the user interface.
ServiceResourceAccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A value that represents the type of access granted to the target Group, or UserRole. The possible values are: - Read - Edit - All
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the User or Group being granted access.

ServiceResourcePreference

Represents the service resource scheduling preferences that are considered as a business objective in the scheduling logic engine. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

The org must have the Workforce Engagement license. To view, create, edit, and delete records, the user must have the Workforce Engagement Agent or Workforce Engagement Planner permission set.

Fields

Field	Details
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The end date period that this preference is effective.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the service resource preference was last modified. Its label in the user interface is Last Modified Date.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the service resource preference was last viewed.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The service resource preference record name.
OperatingHoursId	Type reference Properties Create, Filter, Group, Sort, Update Description The operating hours associated with the service resource preference. This is a relationship field. Relationship Name OperatingHours

Field	Details
	Relationship Type Lookup Refers To OperatingHours
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the service resource preference. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ServiceResourceId	Type reference Properties Create, Filter, Group, Sort, Update Description The service resource associated with the service resource preference. This is a relationship field. Relationship Name ServiceResource Relationship Type Lookup Refers To ServiceResource
StartDate	Type date Properties Create, Filter, Group, Sort, Update Description The start date period that this preference is effective.

ServiceResourceSkill

Represents a skill that a service resource possesses in Field Service and Lightning Scheduler. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
EffectiveEndDate	Type datetime Properties Create, Filter, Nillable, Sort, Update Description The date when the skill expires. For example, if a service resource needs to be re-certified after six months, the end date would be the date their certification expires.
EffectiveStartDate	Type datetime Properties Create, Filter, Sort, Update Description The date when the service resource gains the skill. For example, if the skill represents a certification, the start date would be the date of certification.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the resource skill was last modified. Its label in the user interface is <code>Last Modified Date</code>.

Field Name	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the resource skill was last viewed.
ServiceResourceId	Type reference Properties Create, Filter, Group, Sort Description The service resource who possesses the skill. This is a relationship field. Relationship Name ServiceResource Relationship Type Lookup Refers To ServiceResource
SkillId	Type reference Properties Create, Filter, Group, Sort, Update Description The skill the service resource possesses. This is a relationship field. Relationship Name Skill Relationship Type Lookup Refers To Skill
SkillLevel	Type double Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description The service resource's skill level. Skill level can range from zero to 99.99.

Field Name	Details
SkillNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-generated number identifying the resource skill assignment.

Usage

You can assign skills to all service resources in your org to indicate their certifications and areas of expertise, and specify each resource's skill level from 0 to 99.99. For example, you can assign Maria the "Welding" skill, level 50.

If you intend to use the skills feature, determine which skills you want to track and how skill level should be determined. For example, you may want the skill level to reflect years of experience, certification levels, or license classes.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

ServiceResourceSkillChangeEvent (API version 54.0)

Change events are available for the object.

ServiceResourceSkillFeed

Feed tracking is available for the object.

ServiceResourceSkillHistory

History is available for tracked fields of the object.

ServiceSetupProvisioning

Represents a task completed by the Service Setup Assistant. This object is available in API version 52.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

ServiceSetupProvisioning is accessible only if the Service Setup Assistant is turned on. Users need the Customize Application permission to access it.

Fields

Field	Details
JobName	Type string Properties Filter, Group, idLookup, Sort Description The name of a group of tasks completed by the Service Setup Assistant.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An automatically generated ID.
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The status of the task being completed by the Service Setup Assistant. Possible values are: • ` • Completed—The task completed successfully. • ExistingSetup—The task couldn't be completed due to conflicting configurations. • FailedFatalError—The task couldn't be completed. • InProgress—The task is in progress. • PRE_CONDITION_NOT_MET—The task couldn't be completed because one or more prerequisites weren't met. • VALIDATION_NOT_MET—The task is considered as completed but the condition defined in the implementation was not true. No retry will be executed.
TaskAction	Type string Properties Filter, Group, Nillable, Sort Description The action taken by the task. Possible values are:

Field	Details
	• updatesOrgSettings • updatesOrgValues • sortApps • setForecastingUserFeatureLicense • recalculatePermissionSetGroup • deploysMetadata • createsSetupEntityAccess • clearGuidanceCenterCache • callsConnectApi • assignsPermissionSets • assignsPermissionSetGroups
TaskActionContext	Type string Properties Filter, Group, Nillable, Sort Description Additional details about the <code>TaskAction</code> parameter, including how much of the action has been processed.
TaskContext	Type textarea Properties Nillable Description The description of the changes included in the task.
TaskName	Type string Properties Filter, Group, Nillable, Sort Description The name of the task.

ServiceTerritory

Represents a geographic or functional region in which work can be performed in Field Service, Salesforce Scheduler, or Workforce Engagement. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
Address	Type address Properties Filter Description An address to associate with the territory. For example, you can list the address of the territory's headquarters.
AvgTravelTime	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The average travel time for this service territory. The value is added to the Work Capacity Usage for each scheduled service appointment in the service territory. Available in API version 59.0 and later.
City	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The city of the associated address. Maximum length is 40 characters.
Country	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The country to associate with the territory. Maximum length is 80 characters.

Field Name	Details
Description	Type textarea Properties Create, Nillable, Update Description The description of the territory.
GeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The level of accuracy of a location's geographical coordinates compared with its physical address. Usually provided by a geocoding service based on the address's latitude and longitude coordinates. This field is available in the API only.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the service territory is meant to be used. If a territory is inactive, you can't add members to it or link it to work orders, work order line items, or service appointments.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the territory was last modified. Its label in the user interface is <code>Last Modified Date</code>.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the territory was last viewed.
Latitude	Type double

Field Name	Details
	Properties Create, Filter, Nillable, Sort, Update Description Used with <code>Longitude</code> to specify the precise geolocation of the address associated with the territory. Acceptable values are numbers between –90 and 90 with up to 15 decimal places. This field is available in the API only.
Longitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>Latitude</code> to specify the precise geolocation of the address associated with the territory. Acceptable values are numbers between –180 and 180 with up to 15 decimal places. This field is available in the API only.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the territory.
OperatingHoursId	Type reference Properties Create, Filter, Group, Sort, Update Description The territory's operating hours, which indicate when service appointments within the territory can occur. Service resources who are members of a territory automatically inherit the territory's operating hours unless different hours are specified on the resource record. This field is a relationship field. Relationship Name OperatingHours Relationship Type Lookup Refers To OperatingHours
ParentTerritoryId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The territory's parent service territory, if it has one. For example, a <i>Northern California</i> territory can have a <i>State of California</i> territory as its parent. A service territory hierarchy can contain up to 10,000 territories. This field is a relationship field. Relationship Name ParentTerritory Relationship Type Lookup Refers To ServiceTerritory
PostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The postal code of the address associated with the territory. Maximum length is 20 characters.
State	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The state of the address associated with the territory. Maximum length is 80 characters.
Street	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The street number and name of the address associated with the territory.
TopLevelTerritoryId	Type reference Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description (Read only) The top-level territory in a hierarchy of service territories. Depending on where a territory lies in the hierarchy, its top-level territory can be the same as its parent. This field is a relationship field. Relationship Name TopLevelTerritory Relationship Type Lookup Refers To ServiceTerritory
TravelModeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the TravelMode used for travel time calculations. The travel mode includes information about the type of transportation, such as a car or walking, whether a vehicle can take toll roads, and whether a vehicle is transporting hazardous materials. This field is a relationship field. Relationship Name TravelMode Relationship Type Lookup Refers To TravelMode
TravelTimeBuffer	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Add additional time to driving time, such as time to find parking or to walk to the site. This value overrides the Travel Time Buffer value defined in Field Service Settings Scheduling Routing.
TypicalInTerritoryTravelTime	Type double Properties Create, Filter, Nillable, Sort, Update

Field Name	Details
	Description Estimated number of minutes needed to travel from one location to another within the service territory. You can use this field in Apex customization.

Usage

If you want to use service territories, determine which territories to create. Depending on how your business works, you can create territories based on cities or counties, or on functional categories such as sales versus service. If you plan to build out a hierarchy of service territories, create the highest-level territories first.

For example, you can create a hierarchy of territories to represent the areas where your team works in California. Include a top-level territory named *California*, three child territories named *Northern California*, *Central California*, and *Southern California*, and a series of third-level territories corresponding to California counties. Assign service resources to each county territory to indicate who is available to work in that county.

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ServiceTerritoryChangeEvent (API version 48.0)

Change events are available for the object.

ServiceTerritoryFeed

Feed tracking is available for the object.

ServiceTerritoryHistory

History is available for tracked fields of the object.

ServiceTerritoryOwnerSharingRule

Sharing rules are available for the object.

ServiceTerritoryShare

Sharing is available for the object.

ServiceTerritoryDataTranslation

Represents the translated values of the data stored within a [ServiceTerritory](#) record's fields. This object is available in API version 54.0 and later.

Supported Calls

```
create(), delete(), describeObjects(), getDeleted(), getUpdated(), query(), retrieve(),
undelete(), update(), upsert()
```

Special Access Rules

- Your organization must be using Enterprise, Performance, Unlimited, or Developer edition.

- Translation Workbench and data translation must be enabled in your org.
- To view this object, you must have the “View Setup and Configuration” permission

Fields

Field	Details
Description	Type textarea Properties Create, Nillable, Update Description The translated value for the ServiceTerritory description.
IsOutOfDate	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the translation is out-of-date (<code>true</code>) or current (<code>false</code>). A translation is out-of-date if the parent ServiceTerritory record is updated after the last translation was filed.
Language	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The language for these translated values.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The translated value for the ServiceTerritory record name. This field is required to translate the text in other fields.
ParentId	Type reference Properties Create, Filter, Group, Sort, Update Description The record ID of the ServiceTerritory associated with the data that is being translated.

Usage

Use this object to translate the data stored in a ServiceTerritory record into the different languages supported by Salesforce. If data translation is enabled for custom fields on the ServiceTerritory object, additional ServiceTerritoryDataTranslation fields exist for translating the data contained within those fields.

You can't use a custom external id field in an upsert call for a ServiceTerritoryDataTranslation object.

ServiceTerritoryLocation

Represents a location associated with a particular service territory in field service.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
LocationId	Type reference Properties Create, Filter, Group, Sort, Update Description The location that is associated with the service territory.
ServiceTerritoryId	Type reference Properties Create, Filter, Group, Sort Description The associated service territory.
ServiceTerritoryLocationNumber	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description (Read only) Auto-generated number identifying the service territory location.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[ServiceTerritoryLocationChangeEvent](#) (API version 55.0)

Change events are available for the object.

[ServiceTerritoryLocationFeed](#)

Feed tracking is available for the object.

[ServiceTerritoryLocationHistory](#)

History is available for tracked fields of the object.

ServiceTerritoryMember

Represents a service resource who can be assigned in a service territory in Field Service, Salesforce Scheduler, or Workforce Engagement. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

Field Service or Workforce Engagement must be enabled.

Fields

Field Name	Details
Address	Type address Properties Filter Description The member's address. You may want to list the related service resource's address in this field.
City	Type string Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The city of the member's address. Maximum length is 40 characters.

Field Name	Details
Country	Type string Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The country of the member's address. Maximum length is 80 characters.
EffectiveEndDate	Type datetime Properties Create, Filter, Nillable, Sort, Update Description The date when the service resource is no longer a member of the territory. If the resource will be working in the territory for the foreseeable future, leave this field blank. This field is mainly useful for indicating when a temporary relocation ends.
EffectiveStartDate	Type datetime Properties Create, Filter, Sort, Update Description The date when the service resource becomes a member of the service territory.
GeocodeAccuracy	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The level of accuracy of a location's geographical coordinates compared with its physical address. Usually provided by a geocoding service based on the address's latitude and longitude coordinates.  Note: This field is available in the API only.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the territory member was last modified. Its label in the user interface is <code>Last Modified Date</code>.

Field Name	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the territory member was last viewed.
Latitude	Type double Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description Used with <code>Longitude</code> to specify the precise geolocation of the member's address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places.  Note: This field is available in the API only.
Longitude	Type double Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description Used with <code>Latitude</code> to specify the precise geolocation of the member's address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places.  Note: This field is available in the API only.
MemberNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description (Read only) An auto-generated number identifying the service territory member.
OperatingHoursId	Type reference Properties Create, Filter, Group, Sort, Nillable, Update Description The operating hours assigned to the service territory member. If no operating hours are specified, the member is assumed to use their parent service territory's

Field Name	Details
	operating hours. If a member needs special operating hours, create them in Setup and select them in the <code>Operating Hours</code> lookup field on the member's detail page. This is a relationship field. Relationship Name OperatingHours Relationship Type Lookup Refers To OperatingHours
PostalCode	Type string Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The postal code of the member's address. Maximum length is 20 characters.
ServiceResourceId	Type reference Properties Create, Filter, Group, Sort, Update Description The service resource assigned to the service territory. This is a relationship field. Relationship Name ServiceResource Relationship Type Lookup Refers To ServiceResource
ServiceTerritoryId	Type reference Properties Create, Filter, Group, Sort Description The service territory that the service resource is assigned to. This is a relationship field. Relationship Name ServiceTerritory

Field Name	Details
	Relationship Type Lookup
	Refers To ServiceTerritory
State	Type string
	Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update
	Description The state of the member's address. Maximum length is 80 characters.
Street	Type textarea
	Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update
	Description The street number and name of the member's address.
TerritoryType	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description Primary, Secondary, or Relocation. - The primary territory is typically the territory where the resource works most often—for example, near their home base. Service resources can only have one primary territory. - Secondary territories are territories where the resource can be assigned to appointments if needed. Service resources can have multiple secondary territories. - Relocation territories represent temporary moves for service resources. If you're using the Field Service managed packages with the scheduling optimizer, resources with relocation territories are always assigned to services within their relocation territories during the specified relocation dates; if they don't have a relocation territory, the primary territories are favored over the secondary. For example, a service resource might have the following territories: - Primary territory: <i>West Chicago</i> - Secondary territories: <i>East Chicago</i>

Field Name	Details
	— South Chicago Relocation territory: <i>Manhattan</i>, for a three-month period
TravelModeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the TravelMode used for travel time calculations. The travel mode includes information about the type of transportation, such as a car or walking, whether a vehicle can take toll roads, and whether a vehicle is transporting hazardous materials. This field is a relationship field. Relationship Name TravelMode Relationship Type Lookup Refers To TravelMode

Usage

If you delete a service territory with members, the service resources who were members no longer have any connection to the territory.

Associated Objects

This object has the following associated objects. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

ServiceTerritoryMemberChangeEvent (API version 48.0)

Change events are available for the object.

ServiceTerritoryMemberFeed

Feed tracking is available for the object.

ServiceTerritoryMemberHistory

History is available for tracked fields of the object.

ServiceTerritoryWorkType

Represents the relationship between a ServiceTerritory object and a WorkType object for Salesforce Scheduler appointments. This object is available in API version 45.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
IsSlotPublished	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicate whether records in the Shift object are created for the selected Service Territory and Work Type. The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the current user last viewed a record related to this object.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this object.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of this service territory-work type relationship.
ServiceTerritoryId	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description The ID of the service territory that's related to the work type indicated in the <code>WorkTypeId</code> field. This is a relationship field. Relationship Name ServiceTerritory Relationship Type Lookup Refers To ServiceTerritory
TeamId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Represents the team associated with the service territory for a specific work type. This field is a relationship field and is available in API version 58.0 and later. Relationship Name Team Relationship Type Lookup Refers To Team
WorkTypeId	Type reference Properties Create, Filter, Group, Sort Description The ID of the work type that's related to the service territory indicated in the <code>ServiceTerritoryId</code> field. This is a relationship field. Relationship Name WorkType Relationship Type Lookup Refers To WorkType

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[ServiceTerritoryWorkTypeFeed](#)

Feed tracking is available for the object.

[ServiceTerritoryWorkTypeHistory](#)

History is available for tracked fields of the object.

SessionPermSetActivation

The SessionPermSetActivation object represents a permission set assignment activated during an individual user session. When a SessionPermSetActivation object is inserted into a permission set, an activation event fires, allowing the permission settings to apply to the user's specific session. This object is available in API versions 37.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`



Note: If you include session-based permission sets in a permission set group, the permissions in them do not require session-based activation for users assigned to the group.

Special Access Rules

As of Summer '20 and later, only users who have one of these permissions can access this object:

- View Setup and Configuration
- Manage Session Permission Set Activations

Fields

Field Name	Details
AuthSessionId	Type reference Properties Create, Filter, Group, Sort Description The session ID related to this permission set assignment for its duration. This is a relationship field. Relationship Name AuthSession Relationship Type Lookup Refers To AuthSession

Field Name	Details
Description	Type string Properties Create, Filter, Group, Nillable, Sort Description The session details, such as device used and browser.
PermissionSetGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The permission set group ID related to this permission set group assignment and user for its duration. This field is available in API version 53.0 and later. This is a relationship field. Relationship Name PermissionSetGroup Relationship Type Lookup Refers To PermissionSetGroup
PermissionSetId	Type reference Properties Create, Filter, Group, Sort Description The permission set ID related to this permission set assignment and user for its duration. This is a relationship field. Relationship Name PermissionSet Relationship Type Lookup Refers To PermissionSet
UserId	Type reference Properties Filter, Group, Sort

Field Name	Details
	Description The user ID of the user to whom this permission set assignment applies for its duration. This is a relationship field.
	Relationship Name User
	Relationship Type Lookup
	Refers To User

Usage

Use SessionPermSetActivation to create a permission set available only for a specified session's duration. For example, create permission sets that provide access to specific applications only during authenticated sessions.

In the following Apex example, an identified session is activated after session information is submitted via a button. Successful activation results in a confirmation message displayed to the user.

```
public class SessionPermSetActivationController {
    // id of the session permission set to be activated
    private final String sessionPermSetId = '0PSxx00000004rJ';
    private final String sessionId;

    public SessionPermSetActivationController() {
        Map<String, String> sessionManagement = Auth.SessionManagement.getCurrentSession();

        String parentSessionId = sessionManagement.get('ParentId');
        String currentSessionId = sessionManagement.get('SessionId');

        sessionId = parentSessionId != null ? parentSessionId : currentSessionId;
    }

    public PageReference activate() {
        // activate the permission set
        SessionPermSetActivation activation = new SessionPermSetActivation();
        activation.AuthSessionId = sessionId;
        activation.PermissionSetId = sessionPermSetId;
        activation.Description = 'created by SessionPermSetActivationController';

        insert activation;
        return null;
    }

    public boolean getActivated() {
        Integer alreadyActivated = [SELECT count()
                                   FROM SessionPermSetActivation];
    }
}
```



```
WHERE AuthSessionId = :sessionId
And PermissionSetId = :sessionPermSetId  LIMIT

1];
    return alreadyActivated > 0;
}
}

<apex:page controller="SessionPermSetActivationController">
    <apex:outputPanel rendered="{!!Activated}">
        <h3>Activate Session Permission Set</h3>
        <br />
        <apex:form >
            <apex:commandButton action="{!activate}" value="Activate"
id="activateButton"/>
        </apex:form>
    </apex:outputPanel>
    <apex:outputPanel rendered="{!!Activated}">
        <h3>Session Permission Set is already active.</h3>
    </apex:outputPanel>
</apex:page>
```

SetupAssistantStep

For internal use only.

SetupAuditTrail

Represents changes you or other admins made in your org’s Setup area for at least the last 180 days. This object is available in API version 15.0 and later.

 **Note:** SetupAuditTrail is not a supported standard controller. Using SetupAuditTrail as a standard controller in a Visualforce page results in an error.

Supported Calls

query(), retrieve()

 **Note:** Aggregate queries aren’t supported on this object. For example, SELECT count() FROM SetupAuditTrail works but SELECT count(Id) FROM SetupAuditTrail fails.

Fields

Field	Details
Action	Type string

Field	Details
	Properties Filter, Sort Description The category of the change made in Setup. For example, a value of <i>PermSetCreate</i> indicates that an administrator created a permission set. The <i>Display</i> field contains more specific information.
CreatedByContext	Type string Properties Filter, Group, Nillable, Sort Description The context under which the Setup change was made. For example, if Einstein uses cloud-to-cloud services to make a change in Setup, the value of this field is <i>Einstein</i>. This field is available in API version 48.0 and later.
CreatedByIssuer	Type string Properties Filter, Group, Nillable, Sort Description Reserved for future use.
DelegateUser	Type string Properties Filter, Nillable, Sort Description The Login-As user who executed the action in Setup. If a Login-As user didn't perform the action, this field is blank. This field is available in API version 35.0 and later.
Display	Type string Properties Nillable, Sort Description The full description of changes made in Setup. For example, if the <i>Action</i> field has a value of <i>PermSetCreate</i>, the <i>Display</i> field has a value like "Created permission set MAD: with user license Salesforce."
Section	Type string

Field	Details
	Properties Nillable, Sort
	Description The section in the Setup menu where the action occurred. For example, Manage Users or Company Profile.

 **Note:** You can use SOQL joins to get the information you need more quickly. For example, running `SELECT CreatedBy.Name FROM SetupAuditTrail LIMIT 10` returns the first and last names of the last 10 people to make changes in Setup.

SetupEntityAccess

Represents the enabled setup entity access settings (such as for Apex classes) for the parent PermissionSet. This object is available in API version 25.0 and later.

To grant users access to an entity, associate the appropriate SetupEntityAccess record with a PermissionSet that's assigned to a user.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`

Special Access Rules

As of Spring '20 and later, only users with "View Setup and Configuration" permission can access this object.

Fields

Field Name	Details
ParentId	Type reference
	Properties Create, Filter, Group, Sort
	Description The ID of the entity's parent PermissionSet. This is a relationship field.
	Relationship Name Parent
	Relationship Type Lookup
	Refers To PermissionSet

Field Name	Details
SetupEntityId	Type reference Properties Create, Filter, Group, Sort Description The ID of the entity for which access is enabled, such as an Apex class or Visualforce page.
SetupEntityType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of setup entity for which access is enabled. Valid values are: • <code>ApexClass</code> for Apex classes • <code>ApexPage</code> for Visualforce pages • In API version 64.0 and later, <code>BotDefinition</code> for agents • In API version 28.0 and later, <code>ConnectedApplication</code> for OAuth connected apps • In API version 48.0 and later, <code>CustomEntityDefinition</code> for Custom Settings and Custom Metadata Types • In API version 31.0 and later, <code>CustomPermission</code> for custom permissions • In API version 62.0 and later, <code>EmailRoutingAddress</code> for email routing addresses. • In API version 60.0 and later, <code>ExternalClientApplication</code> for external client apps. • In API version 58.0 and later, <code>ExternalCredentialParameter</code> for external credential principals. • In API version 58.0 and later, <code>FlowDefinition</code> for flows • In API version 62.0 and later, <code>MessagingChannel</code> for messaging channels • In API version 58.0 and later, <code>OrgWideEmailAddress</code> for organization-wide email addresses • In API version 28.0 and later, <code>ServiceProvider</code> for service providers • In API version 60.0 and later, <code>StandardInvocableActionType</code> for standard invocable actions. • In API version 28.0 and later, <code>TabSet</code> for apps

Usage

Because SetupEntityAccess is a child of the PermissionSet object, the usage is similar to other PermissionSet child objects like FieldPermissions and ObjectPermissions.

For example, the following code returns all permission sets that grant access to any setup entities for which access is enabled:

```
SELECT Id, ParentId, Parent.Name, SetupEntityId
FROM SetupEntityAccess
```

The following code returns permission sets that grant access only to Apex classes:

```
SELECT Id, ParentId, Parent.Name, SetupEntityId
FROM SetupEntityAccess
WHERE SetupEntityType='ApexClass'
```

The following code returns permission sets that grant access to any setup entities, and are not owned by a profile:

```
SELECT Id, ParentId, Parent.Name, SetupEntityId
FROM SetupEntityAccess
WHERE ParentId
IN (SELECT Id
    FROM PermissionSet
    WHERE isOwnedByProfile = false)
```

You may want to return only those permission sets that have access to a specific setup entity. To do this, query the parent object. For example, this code returns all permission sets that grant access to the `helloWorld` Apex class:

```
SELECT Id, Name,
    (SELECT Id, Parent.Name, Parent.Profile.Name
     FROM SetupEntityAccessItems)
FROM ApexClass
WHERE Name = 'helloWorld'
```

While it's possible to return permission sets that have access to a `ConnectedApplication`, `ServiceProvider`, or `TabSet` by `SetupEntityId`, it's not possible to return permission sets that have access to these `SetupEntityType` fields by any other AppMenuItem attribute, such as `Name` or `Description`. For example, to find out if a user has access to the Recruiting app, you'd run two queries. First, query to get the AppMenuItem ID:

```
SELECT Id, Name, Label
FROM AppMenuItem
WHERE Name = 'Recruiting'
```

Let's say the previous query returned the AppMenuItem `ApplicationId` `02uD0000000GlimIAW`. Using this ID, you can now run a query to find out if a user has access to the Recruiting app:

```
SELECT Id, SetupEntityId, SetupEntityType
FROM SetupEntityAccess
WHERE ParentId
IN
    (SELECT PermissionSetId
     FROM PermissionSetAssignment)
```

```
WHERE AssigneeId = '005D00000001QOzF')
AND (SetupEntityId = '02uD00000000GIiMIAW')
```

SEE ALSO:

- [PermissionSet](#)
- [FieldPermissions](#)
- [ObjectPermissions](#)
- [ApexClass](#)
- [ApexPage](#)

ShapeRepresentation

Contains information about the shape of an org. The shape of an org includes licenses and limits information. You can easily create scratch orgs based on a source org’s shape. This object is available in API version 50.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A free-form text field for you to enter a description of this org shape. This field has a maximum length of 255 characters.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Date when the org shape was last referenced. This field is read-only.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description Date when the org shape was last viewed. This field is read-only.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The alias for the org shape.
Status	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Status of this org shape. You can use an org shape when it's Active. This field is read-only. Possible values are: • Active • Error • InProgress • Inactive • New

SharingRecordCollection

Represents a collection of records. This object is available in API version 51.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Record collections are limited to 100 items and 100 members for each record collection.

Fields

Field	Details
Description	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the record collection.
GroupId	Type reference Properties Filter, Group, Nillable, Sort Description The group ID of the record collection.
LastAdded	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when an item was last added to the record collection.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the record collection.

Field	Details
NumberOfRecords	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The number of records in the record collection. The limit is 100.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the record collection owner.

SharingRecordCollectionItem

Represents a single record in a collection of records. This object is available in API version 51.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Record collections are limited to 100 items for each record collection.

Fields

Field	Details
CollectionId	Type reference Properties Create, Filter, Group, Sort Description The ID of the related record collection.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The description of the record collection item.
ItemId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the record collection item.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the record collection item.

SharingRecordCollectionMember

Represents a user with access to a collection of records. This object is available in API version 51.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Record collections are limited to 100 members for each record collection.

Fields

Field	Details
AccessLevel	Type picklist Properties Read, Edit Description The access level on the related record collection.
CollectionId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort Description The ID of the related record collection.
UserOrGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the user or group with access to the record collection.

Shift

Represents a shift for service resource scheduling. Available in API versions 46.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `upsert()`

Special Access Rules

Field Service, Service Engagement, or Workforce Engagement must be enabled. For Field Service, users must have Field Service permissions. For Service Engagement, users must have the Service Engagement Planner permission set. For Workforce Engagement, users must have the Workforce Engagement Admin or Planner permission set.

Fields

Field	Details
BackgroundColor	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Sets a background color when shifts are displayed in the UI. Use a 3- or 6-digit hexadecimal format, for example #FF00FF. Available in API version 54.0 and later.
EndTime	Type dateTime

Field	Details
	Properties Create, Filter, Sort, Update Description The date and time that the shift ends.
IsHolidayShift	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates a shift that overlaps with holiday hours. The default value is false. Available in API version 55.0 and later.
IsNonStandard	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the shift is nonstandard, such as overtime or on-call shifts. The default value is false. Available in API version 54.0 and later.
JobProfileId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The job profile associated with the shift. Available in API versions 47.0 and later.
Label	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The label that a shift is given.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the current user last viewed a related record.

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the current user last viewed this record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the shift. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
RecordsetFilterCriteriaId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the recordset filter criteria selected for the shift. Available in API version 49.0 and later. This is a relationship field. Relationship Name RecordsetFilterCriteria Relationship Type Lookup Refers To RecordsetFilterCriteria
ServiceResourceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The ID of the service resource the shift belongs to. Available in API versions 47.0 and later. This is a relationship field. Relationship Name ServiceResource Relationship Type Lookup Refers To ServiceResource
ServiceTerritoryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the service territory the shift belongs to. Available in API versions 47.0 and later. This is a relationship field. Relationship Name ServiceTerritory Relationship Type Lookup Refers To ServiceTerritory
ShiftNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The number automatically given to the shift upon creation.
ShiftTemplateId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The shift template ID, if the shift was created from a shift template. Available in API version 53.0 and later. This is a relationship field. Relationship Name ShiftTemplate

Field	Details
	Relationship Type Lookup Refers To ShiftTemplate
StartTime	Type dateTime Properties Create, Filter, Sort, Update Description The date and time that the shift starts.
Status	Type picklist Properties Create, Filter, Group, Sort, Update Description Describes the status of the shift. Users can create custom values. Default values are: - Tentative - Published - Confirmed
StatusCategory	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Describes the status of the shift using static values. This field is derived from <code>Status</code> using the mapping defined in setup. Possible values are: - Tentative - Published - Confirmed
TimeSlotType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Type of time slot for the shift. The same setup values as the <code>TimeSlot</code> field in the <code>OperatingHours</code> object.

Field	Details
	Possible values are: • Normal (default value) • Extended

Usage

Scheduling and dispatching service resources using shift data is not supported in API version 46.0, and is a pilot feature in API version 47.0.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

ShiftChangeEvent (API version 54.0)

Change events are available for the object.

ShiftFeed

Feed tracking is available for the object.

ShiftHistory

History is available for tracked fields of the object.

ShiftOwnerSharingRule

Sharing rules are available for the object.

ShiftShare

Sharing is available for the object.

ShiftHistory

Represents the history of changes made to tracked fields on a time sheet. Available in API versions 46.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Special Access Rules

Field Service must be enabled in your organization, and field tracking for shift fields must be configured.

Fields

Field	Details
DataType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Data type of the field that was changed.
Field	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The name of the field that was changed.
NewValue	Type anyType Properties Nillable, Sort Description The new value of the field that was changed.
OldValue	Type anyType Properties Nillable, Sort Description The value of the field before it was changed.
ShiftId	Type reference Properties Filter, Group, Sort Description ID of the shift being tracked. The history is displayed on the detail page for this record. This is a relationship field. Relationship Name Shift Relationship Type Lookup

Field	Details
	Refers To Shift

Usage

Scheduling and dispatching service resources using shift data is not supported in API version 46.0.

ShiftOwnerSharingRule

Represents the rules for sharing a shift with user records other than the owner or anyone above the owner in the role hierarchy. Available in API versions 46.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Field Service must be enabled.



Note: To enable access to this object for your org, contact Salesforce customer support. However, we recommend that you instead use Metadata API to programmatically update owner sharing rules because it triggers automatic sharing rule recalculation. The [SharingRules](#) Metadata API type is enabled for all orgs.

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description A description of the sharing rule. Maximum size is 1000 characters.
DeveloperName	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not

Field	Details
	include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Corresponds to Rule Name in the user interface.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
GroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the source group. A time sheet owned by a User in the source Group triggers the rule to give access.
Name	Type string Properties Create, Filter, Group, Sort, Update Description Label of the sharing rule as it appears in the user interface. Limited to 80 characters. Corresponds to Label on the user interface.
ServiceResourceAccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A value that represents the type of access granted to the target Group, or UserRole. The possible values are: • Read • Edit • All
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the User or Group being granted access.

Usage

Scheduling and dispatching service resources using shift data is not supported in API version 46.0.

ShiftPattern

Represents a pattern of templates for creating shifts. This object is available in API version 51.0 and later.

Supported Calls

```
create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()
```

Special Access Rules

Field Service must be enabled. Users must have Field Service permission.

Fields

Field	Details
Description	Type textarea Properties Create, Nillable, Update Description A short description of the shift pattern to help users identify the pattern.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates that the shift pattern can be used to create shifts. The default value is 'false'.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date that the shift pattern was last used.

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date that the shift pattern was last viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description A short, descriptive name of the shift pattern.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of the shift pattern. Default is the user who creates the shift pattern. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PatternLength	Type int Properties Create, Filter, Group, Sort, Update Description The duration in days of the shift pattern.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ShiftPatternChangeEvent](#) (API version 54.0)

Change events are available for the object.

ShiftPatternFeed on page 55

Feed tracking is available for the object.

ShiftPatternHistory on page 63

History is available for tracked fields of the object.

ShiftPatternShare on page 67

Sharing is available for the object.

SEE ALSO:

[ShiftPatternEntry](#)

[Shift Patterns](#)

ShiftPatternEntry

ShiftPatternEntry links a shift template to a shift pattern. This object is available in API version 51.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled. Users must have Field Service permission.

Fields

Field	Details
DayOrder	Type int Properties Create, Filter, Group, Sort, Update Description DayOrder links the shift template to the specific day within the shift pattern duration that the template. For example, if the DayOrder is 2 then a shift from the associated template is created on the second day of the pattern.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date that the shift pattern entry was last used.

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date that the shift pattern entry was last viewed.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-generated reference number for the shift pattern entry.
ShiftPatternId	Type reference Properties Create, Filter, Group, Sort Description The ID of the shift pattern that the shift pattern entry is linked to. This is a relationship field. Relationship Name ShiftPattern Relationship Type Lookup Refers To ShiftPattern
ShiftTemplateId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the shift template that's used to create shifts for this shift pattern entry. This is a relationship field. Relationship Name ShiftTemplate Relationship Type Lookup Refers To ShiftTemplate

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

ShiftPatternEntryChangeEvent (API version 54.0)

Change events are available for the object.

SEE ALSO:

[ShiftPattern](#)

ShiftSegment

Represents a scheduled activity within a shift. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The org must have the Workforce Engagement license and Workforce Engagement must be enabled. The user requires the Workforce Engagement Planner or Workforce Engagement Admin permission set.

Fields

Field	Details
EndTime	Type dateTime Properties Create, Filter, Sort, Update Description The date and time when the shift segment ends.
IsInAdherence	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether the agent is in adherence (<code>true</code>) or not (<code>false</code>) for the scheduled segment activity. The default value is <code>true</code>.

Field	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the shift segment.
SegmentTypeId	Type reference Properties Create, Filter, Group, Sort, Update Description The unique ID of the associated shift segment type. This is a relationship field. Relationship Name SegmentType Relationship Type Lookup Refers To ShiftSegmentType
ShiftId	Type reference Properties Create, Filter, Group, Sort Description The unique ID of the shift in which the segment is scheduled. This is a relationship field. Relationship Name Shift Relationship Type Lookup Refers To Shift
StartTime	Type dateTime Properties Create, Filter, Sort, Update Description The date and time when the shift segment starts.

ShiftSegmentType

Represents a type of activity scheduled within a shift. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

The org must have the Workforce Engagement license and Workforce Engagement must be enabled. The user requires the Workforce Engagement Planner or Workforce Engagement Admin permission set.

Fields

Field	Details
AdherenceThreshold	Type int Properties Create, Filter, Group, Sort, Update Description A threshold, in minutes. If the agent starts the scheduled activity within this threshold, the shift segment activity is in adherence.
Category	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A category for the type of shift segment. Possible values are: • Break—Break times, such as a coffee or lunch break. • NonWork—Non-working activities, such as training or meetings. • Work—Work activities, such as answering calls, responding to chats, or handling cases.
Color	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Sets a background color when shift activities of this type are displayed in the UI. Use a 3- or 6-digit hexadecimal format, for example #FF00FF.

Field	Details
Description	Type textarea Properties Create, Nillable, Update Description A description of the shift segment type.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if the shift segment type is active (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code>.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the shift segment type. Possible values are the languages that Workforce Engagement supports.

Field	Details
MasterLabel	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The label of the shift segment type.
ServicePresenceStatusId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The unique ID of the associated service presence status for segments of this type. This is a relationship field. Relationship Name ServicePresenceStatus Relationship Type Lookup Refers To ServicePresenceStatus

ShiftShare

Represents a sharing entry on a field service shift. Available in API versions 46.0 and later.

You can only create, edit, and delete sharing entries for standard objects whose `RowCause` field is set to `Manual`. Sharing entries for standard objects with different `RowCause` values are created as a result of your Salesforce org's sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren't stored at all.



Note: While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it's possible that we'll stop storing certain share records to improve performance. As a best practice, don't create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
AccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Level of access that the user or group has to the shift. The possible values are: • Read • Edit • All (This value isn't valid for create or update calls.) Set to an access level that is at least equal to the organization's default shift access level.
ParentId	Type reference Properties Create, Filter, Group, Sort Description The shift associated with the sharing entry. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To Shift
RowCause	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is <code>Manual</code>. If no value is specified, the field defaults to <code>Manual</code>. All other <code>RowCause</code> values are read-only. After the sharing entry is created, this field can't be edited. Valid values include: • <code>Manual</code>—The User or Group has access because a user with "All" access manually shared the shift record. • <code>Owner</code>—The User is the owner of the shift. • <code>Rule</code>—The User or Group has access via a shift sharing rule.

Field	Details
	GuestRule—The User or Group has access via a shift guest user sharing rule.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description (Read only) ID of the user or group that has access to the shift record. This is a polymorphic relationship field. Relationship Name UserOrGroup Relationship Type Lookup Refers To Group, User

Usage

Scheduling and dispatching service resources using shift data is not supported in API version 46.0.

ShiftStatus

Represents a shift, such as Tentative, Published, or Confirmed. Available in API versions 46.0 and later.

Supported Calls

`describeObjects()`, `query()`, `retrieve()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
ApiName	Type string Properties Filter, Group, idLookup, Sort

Field	Details
	Description Uniquely identifies a picklist value so it can be retrieved without using an ID or master label.
IsDefault	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this is the default shift status value (<code>true</code>) or not (<code>false</code>) in the picklist. Only one value can be the default value.
MasterLabel	Type string Properties Filter, Group, Nillable, Sort Description Master label for this shift status value. This display value is the internal label that does not get translated. Limit: 255 characters.
SortOrder	Type int Properties Filter, Group, Nillable, Sort Description Number used to sort this value in the shift status picklist. These numbers are not guaranteed to be sequential, as some previous shift status values might have been deleted.
StatusCode	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Describes the status of the shift using static values. Possible values are: • Tentative • Published • Confirmed

Usage

Scheduling and dispatching service resources using shift data is not supported in API version 46.0.

ShiftTemplate

Represents a template for creating shifts. This object is available in API version 51.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

Field Service or Workforce Engagement must be enabled. For Field Service, users must have Field Service permission. For Workforce Engagement, the user needs to have a Workforce Engagement Admin or Planner permission set.

Fields

Field	Details
BackgroundColor	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Sets a background color when shifts are displayed in the UI. Use a 3- or 6-digit hexadecimal format, for example #FF00FF. Available in API version 54.0 and later.
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Additional information about the shift like number of breaks or activities.
Duration	Type double Properties Create, Filter, Sort, Update Description How long the shift lasts. The unit of measurement for this field is determined by <code>ShiftTemplateDurationType</code> .
IsActive	Type boolean

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the shift is active or inactive.
IsNonStandard	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the shift is nonstandard, such as overtime or on-call shifts. The default value is false. Available in API version 54.0 and later.
JobProfileId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The Job Profile record. This field is optional. This is a relationship field. Relationship Name JobProfile Relationship Type Lookup Refers To JobProfile
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the shift template was last modified. Its label in the user interface is Last Modified Date.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the shift template was last viewed.

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The shift template record name.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the shift template. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
RecordsetFilterCriteriaId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the recordset filter criteria selected for the shift template. Available in API version 53.0 and later. This is a relationship field. Relationship Name RecordsetFilterCriteria Relationship Type Lookup Refers To RecordsetFilterCriteria
ShiftTemplateDurationType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description The unit of measurement for the shift template duration. Possible values are: • H—Hours • M—Minutes The default value is H.
StartTime	Type time Properties Create, Filter, Sort, Update Description The time of day when the shift starts.
TimeSlotType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The type of time slot. Possible values are: • Normal • Extended You can use <i>Extended</i> to represent overtime shifts. Available in API version 55.0 and later.

Associated Objects

This object has the following associated objects. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

ShiftTemplateOwnerSharingRule on page 65

Sharing rules are available for the object.

ShiftTemplateShare on page 67

Sharing is available for the object.

ShiftTemplateChangeEvent on page 68

Change Data Capture events are available for the object. Available in API version 54.0 and later.

Shipment

Represents the transport of inventory in field service or a shipment of order items in Order Management.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

At least one of these features must be enabled:

- Order Management
- Field Service
- B2B Commerce
- Health Cloud Visit Inventory
- Consumer Goods Cloud Retail Execution

Fields

Field Name	Details
ActualDeliveryDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date the product was delivered.
DeliveredToId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The person or entity the product was delivered to. This is a polymorphic relationship field. Relationship Name DeliveredTo Relationship Type Lookup Refers To Group, User
DeliveryMethodId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The delivery method used for the shipment. This field is available in API version 51.0 and later.
Description	Type textarea Properties Create, Nillable, Update Description Details not recorded in the provided fields
DestinationLocationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The place the product is to be delivered. This is a relationship field. Relationship Name DestinationLocation Relationship Type Lookup Refers To Location
ExpectedDeliveryDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date the product is expected to be delivered.
FulfillmentOrderId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The fulfillment order that the shipment belongs to. This field is available in API version 51.0 and later.

Field Name	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last interacted with this record, directly or indirectly.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (LastReferencedDate), but not viewed it.
OrderSummaryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The order summary associated with the shipment. This field is available in API version 51.0 and later.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the shipment. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
Provider	Type picklist

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The company or person making the transfer.
ReturnOrderId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description For a return Shipment, the associated ReturnOrder. This field is available in API version 53.0 and later.
ShipFromAddress	Type address Properties Filter, Nillable Description The place the product is coming from. The compound form of the ship to address. Read-only. For details on compound address fields, see Address Compound Fields .
ShipFromCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The city of the address where the shipment originates.
ShipFromCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The country of the address where the shipment originates.
ShipFromGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field Name	Details
	Description Accuracy level of the geocode for the address where the shipment originates. See Compound Field Considerations and Limitations for details on geolocation compound fields.  Note: This field is available in the API only.
ShipFromLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with Longitude to specify the precise geolocation of the address where the shipment originates. Acceptable values are numbers between –90 and 90 with up to 15 decimal places. See Compound Field Considerations and Limitations for details on geolocation compound fields.  Note: This field is available in the API only.
ShipFromLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with Latitude to specify the precise geolocation of the address where the shipment originates. Acceptable values are numbers between –180 and 180 with up to 15 decimal places. See Compound Field Considerations and Limitations for details on geolocation compound fields.  Note: This field is available in the API only.
ShipFromPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The postal code of the address where the shipment originates.
ShipFromState	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The state of the address where the shipment originates.
ShipFromStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The street of the address where the shipment originates.
ShipToAddress	Type address Properties Filter, Nillable Description The physical address where the shipment is delivered. The compound form of the ship to address. Read-only. For details on compound address fields, see Address Compound Fields .
ShipToCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The city of the address where the shipment is delivered.
ShipToCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The country of the address where the shipment is delivered.
ShipToGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Accuracy level of the geocode for the address where the shipment is delivered. See Compound Field Considerations and Limitations for details on geolocation compound fields.

Field Name	Details
	 Note: This field is available in the API only.
ShipToLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with Longitude to specify the precise geolocation of the address where the shipment is delivered. Acceptable values are numbers between –90 and 90 with up to 15 decimal places. See Compound Field Considerations and Limitations for details on geolocation compound fields.  Note: This field is available in the API only.
ShipToLongitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with Latitude to specify the precise geolocation of the address where the shipment is delivered. Acceptable values are numbers between –180 and 180 with up to 15 decimal places. See Compound Field Considerations and Limitations for details on geolocation compound fields.  Note: This field is available in the API only.
ShipToName	Type string Properties Create, Filter, Group, Sort, Update Description The shipment recipient.
ShipToPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The postal code of the address where the shipment is delivered.
ShipToState	Type string

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The state of the address where the shipment is delivered.
ShipToStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The street of the address where the shipment is delivered.
ShipmentNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-generated number identifying the shipment.
SourceLocationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The field service location where the shipment originates. This is a relationship field. Relationship Name SourceLocation Relationship Type Lookup Refers To Location
Status	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The status of the shipment. The picklist includes the following values, which can be customized: • <i>Created</i>—Shipment has been created.

Field Name	Details
	• <i>Delivered</i>—Shipment has been delivered. • <i>In Transit</i>—Shipment is in transit. • <i>Shipped</i>—Order has been shipped. • <i>Voided</i>—Shipment has been cancelled.
TotalItemsQuantity	Type double Properties Filter, Nillable, Sort Description The total quantity of items included in the shipment. This value is calculated as the sum of the quantities of the shipment items in the shipment. This field is available in API version 51.0 and later.
TrackingNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Tracking number for the shipment.
TrackingUrl	Type url Properties Create, Filter, Group, Nillable, Sort, Update Description URL of website used for tracking the shipment.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ShipmentChangeEvent \(API version 48.0\)](#)

Change events are available for the object.

[ShipmentFeed](#)

Feed tracking is available for the object.

[ShipmentHistory](#)

History is available for tracked fields of the object.

[ShipmentOwnerSharingRule](#)

Sharing rules are available for the object.

ShipmentShare

Sharing is available for the object.

SEE ALSO:

[ShipmentItem](#)

ShipmentItem

Represents an order item included in a shipment. This object is available in API version 51.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

At least one of these features must be enabled:

- Order Management
- Field Service
- B2B Commerce
- Health Cloud Visit Inventory
- Consumer Goods Cloud Retail Execution

Fields

Field	Details
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the shipment item.
ExpectedDeliveryDate	Type dateTime Properties Filter, Nillable, Sort Description Expected delivery date of the shipment that contains the shipment item.

Field	Details
FulfillmentOrderLineItemId	Type reference Properties Filter, Nillable, Sort Description The FulfillmentOrderLineItem (fulfillment order product) corresponding to the shipment item.
OrderItemSummaryId	Type reference Properties Filter, Nillable, Sort Description The OrderItemSummary (order product summary) corresponding to the shipment item.
Product2Id	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The product represented by the shipment item. This is a relationship field. Relationship Name Product2 Relationship Type Lookup Refers To Product2
Quantity	Type double Properties Create, Filter, Sort, Update Description The quantity of products represented by the shipment item.
ReturnOrderLineItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description For a return ShipmentItem, the associated ReturnOrderLineItem. This field is available in API version 53.0 and later.
ShipmentId	Type reference Properties Create, Filter, Group, Sort Description (Master-Detail) The shipment that contains the shipment item. This is a relationship field. Relationship Name Shipment Relationship Type Lookup Refers To Shipment
ShipmentItemNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-generated number identifying the shipment item.
TrackingNumber	Type string Properties Filter, Group, Nillable, Sort Description The tracking number of the shipment that contains the shipment item.
TrackingUrl	Type url Properties Filter, Group, Nillable, Sort Description The tracking URL of the shipment that contains the shipment item.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[ShipmentItemFeed](#)

Feed tracking is available for the object.

[ShipmentItemHistory](#)

History is available for tracked fields of the object.

SEE ALSO:

[Shipment](#)

[FulfillmentOrderLineItem](#)

ShippingCarrier

Shipping company or carrier responsible for transporting goods or packages. Examples include UPS, FedEx, and USPS. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The ShippingCarrier object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
ExternalReference	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Unique code, reference, or identifier for the shipping carrier associated with the delivery. Can be used for internal tracking or integration purposes.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The date when the record was last modified. Its label in the user interface is <code>Last Modified Date</code> .
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the record was last viewed.
ManagedShippingCarrier	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Salesforce-managed shipping carrier information that provides estimated transit times. This field is available in API version 65.0 and later. Possible values are: • FEDEX • UPS • USPS
Name	Type text Properties Create, Filter, Group, Sort, Update Description Name of the shipping carrier associated with the delivery.
ShipFromCountry	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Country where the shipment originates. This field is available in API version 65.0 and later. Possible values are: • AD—Andorra • AE—United Arab Emirates • AF—Afghanistan

Field	Details
	• AG—Antigua and Barbuda • AI—Anguilla • AL—Albania • AM—Armenia • AO—Angola • AQ—Antarctica • AR—Argentina • AS—American Samoa • AT—Austria • AU—Australia • AW—Aruba • AX—Aland Islands • AZ—Azerbaijan • BA—Bosnia and Herzegovina • BB—Barbados • BD—Bangladesh • BE—Belgium • BF—Burkina Faso • BG—Bulgaria • BH—Bahrain • BI—Burundi • BJ—Benin • BL—Saint Barthélemy • BM—Bermuda • BN—Brunei Darussalam • BO—Bolivia, Plurinational State of • BQ—Bonaire, Sint Eustatius and Saba • BR—Brazil • BS—Bahamas • BT—Bhutan • BV—Bouvet Island • BW—Botswana • BY—Belarus • BZ—Belize • CA—Canada • CC—Cocos (Keeling) Islands • CD—Congo, the Democratic Republic of the • CF—Central African Republic

Field	Details
	- CG—Congo - CH—Switzerland - CI—Cote d'Ivoire - CK—Cook Islands - CL—Chile - CM—Cameroon - CN—China - CO—Colombia - CR—Costa Rica - CU—Cuba - CV—Cape Verde - CW—Curaçao - CX—Christmas Island - CY—Cyprus - CZ—Czechia - DE—Germany - DJ—Djibouti - DK—Denmark - DM—Dominica - DO—Dominican Republic - DZ—Algeria - EC—Ecuador - EE—Estonia - EG—Egypt - EH—Western Sahara - ER—Eritrea - ES—Spain - ET—Ethiopia - FI—Finland - FJ—Fiji - FK—Falkland Islands (Malvinas) - FM—Micronesia - FO—Faroe Islands - FR—France - GA—Gabon - GB—United Kingdom - GD—Grenada - GE—Georgia

Field	Details
	• GF—French Guiana • GG—Guernsey • GH—Ghana • GI—Gibraltar • GL—Greenland • GM—Gambia • GN—Guinea • GP—Guadeloupe • GQ—Equatorial Guinea • GR—Greece • GS—South Georgia and the South Sandwich Islands • GT—Guatemala • GU—Guam • GW—Guinea-Bissau • GY—Guyana • HK—Hong Kong SAR China • HM—Heard Island and McDonald Islands • HN—Honduras • HR—Croatia • HT—Haiti • HU—Hungary • ID—Indonesia • IE—Ireland • IL—Israel • IM—Isle of Man • IN—India • IO—British Indian Ocean Territory • IQ—Iraq • IR—Iran, Islamic Republic of • IS—Iceland • IT—Italy • JE—Jersey • JM—Jamaica • JO—Jordan • JP—Japan • KE—Kenya • KG—Kyrgyzstan • KH—Cambodia

Field	Details
	• KI—Kiribati • KM—Comoros • KN—Saint Kitts and Nevis • KP—Korea, Democratic People's Republic of • KR—Korea, Republic of • KW—Kuwait • KY—Cayman Islands • KZ—Kazakhstan • LA—Lao People's Democratic Republic • LB—Lebanon • LC—Saint Lucia • LI—Liechtenstein • LK—Sri Lanka • LR—Liberia • LS—Lesotho • LT—Lithuania • LU—Luxembourg • LV—Latvia • LY—Libya • MA—Morocco • MC—Monaco • MD—Moldova, Republic of • ME—Montenegro • MF—Saint Martin (French part) • MG—Madagascar • MH—Marshall Islands • MK—North Macedonia • ML—Mali • MM—Myanmar • MN—Mongolia • MO—Macao • MP—Northern Mariana Islands • MQ—Martinique • MR—Mauritania • MS—Montserrat • MT—Malta • MU—Mauritius • MV—Maldives

Field	Details
	• MW—Malawi • MX—Mexico • MY—Malaysia • MZ—Mozambique • NA—Namibia • NC—New Caledonia • NE—Niger • NF—Norfolk Island • NG—Nigeria • NI—Nicaragua • NL—Netherlands • NO—Norway • NP—Nepal • NR—Nauru • NU—Niue • NZ—New Zealand • OM—Oman • PA—Panama • PE—Peru • PF—French Polynesia • PG—Papua New Guinea • PH—Philippines • PK—Pakistan • PL—Poland • PM—Saint Pierre and Miquelon • PN—Pitcairn • PR—Puerto Rico • PS—Palestine • PT—Portugal • PW—Palau • PY—Paraguay • QA—Qatar • RE—Reunion • RO—Romania • RS—Serbia • RU—Russian Federation • RW—Rwanda • SA—Saudi Arabia

Field	Details
	• SB—Solomon Islands • SC—Seychelles • SD—Sudan • SE—Sweden • SG—Singapore • SH—Saint Helena, Ascension and Tristan da Cunha • SI—Slovenia • SJ—Svalbard and Jan Mayen • SK—Slovakia • SL—Sierra Leone • SM—San Marino • SN—Senegal • SO—Somalia • SR—Suriname • SS—South Sudan • ST—Sao Tome and Principe • SV—El Salvador • SX—Sint Maarten (Dutch part) • SY—Syrian Arab Republic • SZ—Eswatini • TC—Turks and Caicos Islands • TD—Chad • TF—French Southern Territories • TG—Togo • TH—Thailand • TJ—Tajikistan • TK—Tokelau • TL—Timor-Leste • TM—Turkmenistan • TN—Tunisia • TO—Tonga • TR—Türkiye • TT—Trinidad and Tobago • TV—Tuvalu • TW—Taiwan • TZ—Tanzania, United Republic of • UA—Ukraine • UG—Uganda

Field	Details
	• UM—U.S. Outlying Islands • US—United States • UY—Uruguay • UZ—Uzbekistan • VA—Holy See (Vatican City State) • VC—Saint Vincent and the Grenadines • VE—Venezuela, Bolivarian Republic of • VG—Virgin Islands, British • VI—U.S. Virgin Islands • VN—Vietnam • VU—Vanuatu • WF—Wallis and Futuna • WS—Samoa • YE—Yemen • YT—Mayotte • ZA—South Africa • ZM—Zambia • ZW—Zimbabwe
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the user who currently owns this ShippingCarrier object. Default value is the user logged in to the API to perform the create. This is a polymorphic relationship field. Relationship Name Owner Refers To Group, User

ShippingCarrierMethod

Shipping service provided by a shipping carrier. Examples include Ground, 2Day, and NextDay. Service depends on the range of transit times available for each carrier. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The `ShippingCarrierMethodId` object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
<code>ExternalReference</code>	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Unique code, reference, or identifier for the shipping carrier associated with the delivery. Can be used for internal tracking or integration purposes.
<code>LastReferencedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The date when the record was last modified. Its label in the user interface is <code>Last Modified Date</code>.
<code>LastViewedDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The date the record was last viewed.
<code>ManagedShippingCarrierMethod</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Salesforce-managed shipping carrier method that provides estimated transit times. This field is available in API version 65.0 and later.

Field	Details
MaxTransitTime	Type integer Properties Create, Filter, Group, Sort, Update Description Maximum amount of time required for the carrier to transport and deliver an order. Measured in a specific unit, such as days, hours, or weeks. For example, if the maximum transit time is set to 3, the carrier takes no more than 3 units of the specified transit time unit to deliver the order.
MinTransitTime	Type integer Properties Create, Filter, Group, Nillable, Sort, Update Description Minimum amount of time required for the carrier to transport and deliver an order. Measured in a specific unit, such as days, hours, or weeks. For example, if the minimum transit time is set to 1, the carrier takes at least 1 unit of the specified transit time unit to deliver the order.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the shipping carrier associated with the delivery.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the user who currently owns this ShippingCarrierMethod object. Default value is the user logged in to the API to perform the create. This is a polymorphic relationship field. Relationship Name Owner Refers To Group, User

Field	Details
ShippingCarrierId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Id of the company or service responsible for transporting and delivering the order to the customer. This is a relationship field. Relationship Name ShippingCarrier Refers To ShippingCarrier
ShippingScope	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Type of shipping carrier method. This field is available in API version 65.0 and later. Possible values are: • Domestic • DomesticAndInternational • International The default value is Domestic.
TransitTimeUnit	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Unit of measurement used for transit time. Specifies the time interval in which the minimum and maximum transit times are expressed. The available options are: • Days • Hours • Weeks

ShippingConfigurationSet

Shipping configuration for a set of products in a store. This object is available in API version 59.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The `ShippingConfigurationSet` object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
<code>IsDefault</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the shipping configuration is the default (<code>True</code>) or not (<code>False</code>). The default value is <code>False</code>.
<code>Name</code>	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the shipping configuration set.
<code>OwnerId</code>	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the shipping configuration owner. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup

Field	Details
	Refers To Group, User
ProcessTime	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The amount of time to process an order before it is ready to ship. The default value is 1 Day.
ProcessTimeUnit	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Unit of time to process an order. Possible values are: • Days • Hours • Weeks
TargetRecordId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the target record. This field is a relationship field. Relationship Name TargetRecord Relationship Type Lookup Refers To WebStore

ShippingConfigSetProduct

Represents a product associated with a shipping configuration. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The ShippingConfigSetProduct object is available only if you've a B2B Commerce or D2C Commerce license and the MultipleShippingProfile org perm is enabled.

Fields

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the shipping configuration set product record.
Product2Id	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the Product2 record that is associated with shipping configuration set record. This field is a relationship field. Relationship Name Product2 Refers To Product2
ShippingProfileId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the shipping profile. This field is a relationship field. Relationship Name ShippingProfile

Field	Details
	Relationship Type Master-detail
	Refers To ShippingConfigurationSet (the master object)

ShippingRateArea

A designated geographical area that's available for shipping. This object is available in API version 59.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The ShippingRateArea object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
Countries	Type textarea Properties Create, Nillable, Update Description Countries in the shipping rate area.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the shipping rate area.
Regions	Type textarea Properties Create, Nillable, Update

Field	Details
	Description Reserved for future use.
ShippingRateGroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the shipping rate group This field is a relationship field. Relationship Name ShippingRateGroup Relationship Type Lookup Refers To ShippingRateGroup

ShippingRateGroup

Available shipping rates based on shipping destination. This object is available in API version 59.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The ShippingRateGroup object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the shipping rate group.

Field	Details
ShippingProfileId	Type reference Properties Create, Filter, Group, Sort Description ID of the shipping profile. This field is a relationship field. Relationship Name ShippingProfile Relationship Type Lookup Refers To ShippingConfigurationSet

SignupRequest

Represents a request for a new sign-up. SignupRequest isn't supported in sandbox instances and will result in an error. This object is available in API version 27.0 and later.



Note: You're limited to 20 sign-ups per day. To make additional sign-ups, log a support case in the [Salesforce Partner Community](#). For product, specify **Sales**. For topic, specify **AppExchange & Managed Packages**.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`

Fields

Field Name	Details
AuthCode	Type string Properties Create, Filter, Group, Sort Description A one-time authorization code that can be exchanged for an OAuth access token and refresh token using standard Salesforce APIs. It's used with <code>ConnectedAppCallbackUrl</code> and <code>ConnectedAppConsumerKey</code> when the specified connected app hasn't been configured with an X.509 certificate. The system provides this read-only field after the sign-up request has been processed. This field is available in API version 29.0 and later.

Field Name	Details
Company	Type string Properties Create, Filter, Group, Sort Description The name of the company requesting the trial sign-up.
ConnectedAppCallbackUrl	Type string Properties Create, Filter, Group, Sort Description When used with <code>ConnectedAppConsumerKey</code>, specifies a connected app that's approved automatically during the sign-up creation. This field is available in API version 28.0 and later.
ConnectedAppConsumerKey	Type string Properties Create, Filter, Group, Sort Description When used with <code>ConnectedAppCallbackUrl</code>, specifies a connected app that's approved automatically during the sign-up creation. This field is available in API version 28.0 and later.
Country	Type string Properties Create, Filter, Group, Sort Description The default value is the country of the requesting org. To override the default, enter the two-character, uppercase ISO-3166 country code (Alpha-2 code). A complete list of the codes is located at https://www.iso.org/obp/ui/#search. The language of the trial org is auto-determined based on the value of this field.
CreatedOrgId	Type string Properties Filter, Group, Nillable, Sort Description The 15-character org ID of the trial org created. The system provides this read-only field after the sign-up request has been processed.

Field Name	Details
CreatedOrgInstance	Type string Properties Filter, Group, Nillable, Sort Description The server instance of the new trial org, for example, "na8." This field is available in API version 29.0 and later.
Edition	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The Salesforce template that is used to create the trial org. Possible values are Partner Group, Professional, Partner Professional, Sales Enterprise, Professional TSO, Enterprise, Partner Enterprise, Service Professional, Enterprise TSO, Developer, and Partner Developer. This field is available in API version 35.0 and later.
ErrorCode	Type string Properties Filter, Group, Nillable, Sort Description The error code if the sign-up request isn't successful. The system provides this read-only field for support purposes.
FirstName	Type string Properties Create, Filter, Nillable, Sort Description The first name of the admin user for the trial sign-up.
LastName	Type string Properties Create, Filter, Group, Sort Description The last name of the admin user for the trial sign-up.

Field Name	Details
PreferredLanguage	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The language of the trial org being created. Specify the language using a language code listed under Fully Supported Languages in Supported Languages in Salesforce Help. For example, use <code>zh_CN</code> for simplified Chinese. The value you select overrides the language set by the locale. If you specify an invalid language, the org defaults to the default language of the country. Likewise, if you specify a language that isn't supported by the Salesforce edition associated with your trial template, the trial org defaults to the default language of the country. This field is available in API version 35.0 and later.
ResolvedTemplateId	Type string Properties Filter, Group, Nillable, Sort Description Populated during the sign-up request and for internal use by Salesforce. This field is available in API version 35.0 and later.
ShouldConnectToEnvHub	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description When set to <code>true</code>, the trial org is connected to the Environment Hub. The sign-up must take place in the hub main org or a spoke org. This field is available in API version 35.0 and later.
SignupEmail	Type email Properties Create, Filter, Group, Sort Description The email address of the admin user for the trial sign-up.
SignupSource	Type string Properties Create, Filter, Group, Nillable, Sort

Field Name	Details
	Description A user-specified description of the trial sign-up, up to 60 characters. This field is available in API version 36.0 and later.
Status	Type picklist Properties Defaulted on create, Filter, Group, Sort, Update Description The status of the request. Possible values are <code>New</code>, <code>In Progress</code>, <code>Error</code>, or <code>Success</code>. The default is <code>New</code>.
Subdomain	Type string Properties Create, Filter, Group, Sort Description The My Domain name for the new trial org used in the org's login and application URLs. In Developer Edition orgs, your name must contain at least 3 characters and no more than 27 characters. In all other editions, it must be at least 3 characters and no more than 34 characters. It can include letters, numbers, and hyphens, but you can't start the name with a hyphen. If you don't choose a My Domain during sign-up, Salesforce assigns one for you based on your company name. If you don't like the one we set, you can change it. For details, see My Domain in Salesforce Help.
SuppressSignupEmails	Type boolean Properties Filter, Group, Nillable, Sort Description When set to <code>true</code>, no sign-up emails are sent when the trial org is created. This field is used for the Proxy Signup feature and is available in API version 29.0 and later.
TemplateId	Type string Properties Create, Filter, Group, Nillable, Sort Description The 15-character ID of the Trialforce template that is the basis for the trial sign-up. Salesforce must approve the template. If you don't specify an edition, a template ID is required.

Field Name	Details
TrialDays	Type anyType Properties Create, Defaulted on create, Filter, Group, Sort Description The duration of the trial sign-up in days. Must be equal to or less than the trial days for the approved Trialforce template. If not provided, it defaults to the trial duration specified for the Trialforce template.
TrialSourceOrgId	Type string Properties Filter, Group, Nillable, Sort Description The 15-character org ID of the Trialforce Source Organization (TSO) from which the Trialforce template was created.
Username	Type string Properties Create, Filter, Group, Sort Description The username of the admin user for the trial sign-up. It must follow the address convention specified in RFC822: www.w3.org/Protocols/rfc822/#z10.

Usage

The Java class uses REST API to create a SignupRequest object. It authenticates to the Trialforce Management Organization (TMO) and then posts a request to the SignupRequest object.

Here are the variables to specify in this example.

- **SERVER**—The name of the host server for the TMO, for example, *yourInstance.salesforce.com*.
- **USERNAME**—The admin username for the TMO.
- **PASSWORD**—The concatenation of the admin password and the security token for the TMO. To get an email with the security token, from your personal settings in Salesforce, select **Reset My Security Token** and click **Reset Security Token**.
- **CLIENT_ID**—From Setup in Salesforce, in the Quick Find box, enter *Apps*, and then select **Apps**. Under Connected Apps, click **New**. Enter values for the required fields (Callback URL is required, but you can initially set it to any valid URL because it's not used). Grant full access for the OAuth scopes in the Selected OAuth Scopes selector, and click **Save**. Then copy the value of Consumer Key and use it for this variable.
- **CLIENT_SECRET**—On the same page, click **Click to reveal**. Then copy the value of Consumer Secret and use it for this variable.

```
public class IsvSignupDriver {
    private static final String SERVER = server_name:port;
```

```

private static final String USERNAME = tmo_username;
private static final String PASSWORD = tmo_passwordsecurity_token;
private static final String CLIENT_ID = consumer_key;
private static final String CLIENT_SECRET = consumer_secret;

private static SignupRequestInfo signupRequest = null;

public static String createSignupRequest (SignupRequestInfo sr)
    throws JSONException, IOException {
    JSONObject createResponse = null;
    signupRequest = sr;
    JSONObject loginResponse = login(SERVER, USERNAME, PASSWORD);
    String instanceUrl = loginResponse.getString("instance_url");
    String accessToken = loginResponse.getString("access_token");
    createResponse = create(instanceUrl, accessToken);
    System.out.println("Created SignupRequest object: " + createResponse + "\n");
    return createResponse.toString();
}

/* Authenticates to the TMO using the required credentials */

private static JSONObject login(String server, String username, String password)
    throws ClientProtocolException, IOException, JSONException {
    String authEndPoint = server + "/services/oauth2/token";
    HttpClient httpClient = new DefaultHttpClient();
    try {
        HttpPost post = new HttpPost(authEndPoint);

        List<NameValuePair> params = new ArrayList<NameValuePair>();
        params.add(new BasicNameValuePair("grant_type", "password"));
        params.add(new BasicNameValuePair("client_id", CLIENT_ID));
        params.add(new BasicNameValuePair("client_secret", CLIENT_SECRET));
        params.add(new BasicNameValuePair("username", username));
        params.add(new BasicNameValuePair("password", password));
        post.setEntity(new UrlEncodedFormEntity(params, Consts.UTF_8));

        BasicResponseHandler handler = new BasicResponseHandler();
        String response = httpClient.execute(post, handler);
        return new JSONObject(response);
    } finally {
        httpClient.getConnectionManager().shutdown();
    }
}

/* Posts a request to the SignupRequest object */

private static JSONObject create(String instanceUrl, String accessToken)
    throws ClientProtocolException, IOException, JSONException {
    HttpClient httpClient = new DefaultHttpClient();
    try {
        HttpPost post = new HttpPost(instanceUrl +
            "/services/data/v27.0/objects/SignupRequest/");
        post.setHeader("Authorization", "Bearer " + accessToken);
        post.setHeader("Content-Type", "application/json");
    }
}

```

```

JSONObject requestBody = new JSONObject();
requestBody.put("TemplateId", signupRequest.getTemplateID());
requestBody.put("SignupEmail", signupRequest.getEmail());
requestBody.put("username", signupRequest.getUsername());
requestBody.put("Country", "US");
requestBody.put("Company", signupRequest.getCompanyName());
requestBody.put("lastName", signupRequest.getLastName());

StringEntity entity = new StringEntity(requestBody.toString());
post.setEntity(entity);
BasicResponseHandler handler = new BasicResponseHandler();
String response = httpClient.execute(post, handler);
return new JSONObject(response);
} finally {
    httpClient.getConnectionManager().shutdown();
}
}
}

```

Error Codes

If the sign-up fails, the system generates an error code that can help you identify the cause. This table shows the most important error codes.

Error Code	Description
C-1007	Duplicate username.
C-1015	Error while establishing the new org's My Domain (subdomain) settings. Contact Salesforce support for assistance.
C-1016	Error while configuring the OAuth connected app for Proxy Signup. Verify that your connected app has a valid consumer key, callback URL, and unexpired certificate (if applicable).
C-1018	Invalid subdomain value provided during sign-up.
C-1019	Subdomain in use. Choose a new subdomain value.
C-1020	Template not found. Either the template doesn't exist or it was deleted.
C-1033	Template is the wrong version.
C-1034	Can't create the org. Contact Salesforce Customer Support for assistance.
C-9999	Generic fatal error. Contact Salesforce Customer Support for assistance.
S-1006	Invalid email address (not in a proper email address format).
S-1014	Invalid or missing parameters during the sign-up process. Possible solutions include: - Indicate a valid callback URL. - If indicated, be sure to provide both a Consumer Key and callback URL.
S-1018	Invalid My Domain (subdomain) name. Select a name that doesn't: Contain double hyphens

Error Code	Description
	• End in a hyphen • Include restricted words • Exceed 40 characters (33 for Developer Edition)
S-1019	My Domain (subdomain) already in use.
S-1026	Invalid namespace. A namespace must begin with a letter, can't contain consecutive underscores, can't be a restricted or reserved namespace, and must be 15 characters or fewer.
T-0001	Template ID not valid (not in the format OTTxxxxxxxxxx).
T-0002	Template not found. Either the template doesn't exist or it was deleted.
T-0003	Template not approved for use by Salesforce. Contact Salesforce Customer Support for assistance.
T-0004	The Trialforce Source Organization (TSO) for the template doesn't exist or has expired.
VR-0001	Can't create the scratch org. Try again later.
VR-0002	Can't create the scratch org. Check that the release value is valid. If no release value was specified, contact Salesforce Customer Support.
VR-0003	Can't create the scratch org. Check that the release value is valid. If no release value was specified, contact Salesforce Customer Support.

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

- [SignupRequestFeed](#)—Feed tracking is available for the object.
- [SignupRequestHistory](#)—History is available for tracked fields of the object.
- [SignupRequestOwnerSharingRule](#)—Sharing rules are available for the object
- [SignupRequestShare](#)—Sharing is available for the object.

Site

Represents a public website that is integrated with an org. This object is available in API version 16.0 and later.

To access this object, Digital Experiences, Salesforce Sites, or Site.com must be enabled.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

- Customer Portal users can't access this object.

- To view this object, you must have the View Setup and Configuration permission.

Fields

Field	Description
AdminId	Type reference Properties Filter, Group, Sort Description The site administrator designated as the contact for the site. This user receives site-related communications from site visitors and from Salesforce. This is a relationship field. Relationship Name Admin Relationship Type Lookup Refers To User
AnalyticsTrackingCode	Type string Properties Filter, Group, Nillable, Sort Description The tracking code associated with your site. This code can be used by services like Google Analytics to track page request data for your site.
ArchiveStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The archived status of a site. Possible values are: - NotArchived - TemporarilyArchived
ArchivedById	Type reference Properties Filter, Group, Nillable, Sort

Field	Description
	Description The user that archived the site. Relationship Name: ArchivedBy Relationship Type: Lookup Refers To: User
ArchivedDate	Type dateTime Properties Filter, Nillable, Sort Description Date and time when the site was archived.
ClickjackProtectionLevel	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Sets the clickjack protection level. The options are: • <code>AllowAllFraming</code>—Allow framing by any page (no protection) • <code>SameOriginOnly</code>—Allow framing by the same origin only (recommended) • <code>NoFraming</code>—Don't allow framing by any page (most protection) This field is available in API version 30.0 and later.
DailyBandwidthLimit	Type int Properties Filter, Group, Nillable, Sort Description The rolling 24-hour daily bandwidth limit for the sites in your organization.
DailyBandwidthUsed	Type int Properties Filter, Group, Nillable, Sort

Field	Description
	Description The current rolling 24-hour daily bandwidth usage for the sites in your organization.
DailyRequestTimeLimit	Type int Properties Filter, Group, Nillable, Sort Description The rolling 24-hour daily service request time limit for the sites in your organization. Service request time is calculated as the total server time in minutes required to generate pages for the site.
DailyRequestTimeUsed	Type int Properties Filter, Group, Nillable, Sort Description The current rolling 24-hour daily service request time for the sites in your organization.
Description	Type textarea Properties Filter, Nillable, Sort Description An optional description of the site.
GuestRecordDefaultOwnerId	Type reference Properties Filter, Group, Nillable, Sort Description A user in the Salesforce org that is the default owner of records created by unauthenticated (guest) users. This is a relationship field. Relationship Name GuestRecordDefaultOwner Relationship Type Lookup Refers To User

Field	Description
GuestUserId	Type reference Properties Filter, Group, Nillable, Sort Description The site or Experience Cloud sites specific user that anonymous, unauthenticated users run as when interacting with the site. This is a relationship field. Relationship Name GuestUser Relationship Type Lookup Refers To User
MasterLabel	Type string Properties Filter, Group, Sort Description The name of the site as it appears in the user interface.
MonthlyPageViewsEntitlement	Type int Properties Filter, Group, Nillable, Sort Description The number of page views allowed for the current calendar month for the sites in your organization.
Name	Type string Properties Filter, Group, Sort Description The name used when referencing the site in the API.
OptionsAllowGuestPaymentsApi	Type boolean Properties Filter

Field	Description
	Description Indicates whether unauthenticated guest users can access the Payments API (<code>true</code>) or not (<code>false</code>). The default is <code>false</code> . This field is available in API version 49.0 and later.
<code>OptionsAllowGuestSupportApi</code>	Type boolean Properties Filter Description The option to enable unauthenticated users to access the Support API.
<code>OptionsAllowHomePage</code>	Type boolean Properties Filter Description The option to enable the standard page associated with the Home tab (<code>/home/home.jsp</code>).
<code>OptionsAllowStandardAnswersPages</code>	Type boolean Properties Filter Description The option to enable standard pages associated with an answers Experience Cloud site. If you want to use default Answers pages (such as <code>AnswersHome</code>), enable these pages.
<code>OptionsAllowStandardIdeasPages</code>	Type boolean Properties Filter Description The option to enable standard pages associated with an Ideas Experience Cloud site. If you want to use default Ideas pages (such as <code>IdeasHome</code>), enable these pages.
<code>OptionsAllowStandardLookups</code>	Type boolean Properties Filter

Field	Description
	Description The option to enable the standard lookup pages. These are the windows associated with lookup fields on Visualforce pages.
OptionsAllowStandardPortalPages	Type boolean Properties Filter Description The option to enable authenticated users to access the standard Salesforce pages.
OptionsAllowStandardSearch	Type boolean Properties Filter Description The option to enable the standard search pages. To allow public users to perform standard searches, enable these pages.
OptionsBrowserXssProtection	Type boolean Properties Filter Description The option to enable the browser's cross-site scripting protection.
OptionsCachePublicVfPagesInProxies	Type boolean Properties Filter Description Indicates whether proxy servers cache this site's publicly available pages only for unauthenticated guest users (<code>true</code>) or not (<code>false</code>). When this field is <code>false</code> , this site's cache-enabled Visualforce pages are cached in the web browser for both authenticated and unauthenticated users. The default is <code>true</code> . See Configure Site Caching in Salesforce Help for more information. This field is available in API version 52.0 and later.
OptionsContentSniffingProtection	Type boolean Properties Filter

Field	Description
	Description The option to enable content-sniffing protection.
OptionsCookieConsent	Type boolean Properties Filter Description Indicates whether only required Salesforce-supplied cookies are allowed within the site (<code>true</code>) or all cookies types are allowed: required, functional, and advertising (<code>false</code>). The default is <code>false</code> . This field is available in API version 52.0 and later.
OptionsCspUpgradeInsecureRequests	Type boolean Properties Filter Description This field is removed in API version 52.0 and later. In API version 51.0 and earlier, the value in the field is ignored.
OptionsEnableFeeds	Type boolean Properties Filter Description The option that displays the Syndication Feeds related list, where you can create and manage syndication feeds for users on your public sites. This field is visible only if you have the feature enabled for your organization.
OptionsHasStoredPathPrefix	Type boolean Properties Filter Description Indicates whether this Experience Cloud site has a customized <code>urlPathPrefix</code> (<code>true</code>) or instead uses the Experience Cloud site's <code>UrlPathPrefix</code> plus <code>/s</code> (<code>false</code>). The default is <code>false</code> . In other sites, this field has no effect. This field is available in API version 50.0 and later.
OptionsRedirectToCustomDomain	Type boolean

Field	Description
	Properties Filter Description Indicates whether requests to this site's system-managed URLs are redirected to the HTTPS custom domain serving this site (<code>true</code>) or not (<code>false</code>). System-managed site URLs end in <code>*.my.salesforce-sites.com</code> or <code>*.my.site.com</code>. In Experience Cloud sites, the default is <code>false</code>. In Salesforce Sites, the default is <code>true</code>. If multiple custom domains serve this site and this field is set to <code>true</code>, requests are routed to the site's primary custom URL only if it's an HTTPS custom domain. Otherwise, requests are redirected to the first HTTPS custom domain associated with this site, in alphanumeric order. If no HTTPS custom domain serves this site, this option has no effect. This field is available in API version 52.0 and later.
<code>OptionsReferrerPolicyOriginWhenCrossOrigin</code>	Type boolean Properties Filter Description The option to enable referrer policy (origin-when-cross-origin).
<code>OptionsRequireHttps</code>	Type boolean Properties Filter Description This field is removed in API version 52.0 and later. In API version 51.0 and earlier, the value in the field is ignored.
<code>SiteType</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Identifies whether the site is a Visualforce (Salesforce Sites) or a Site.com site. <code>SiteType</code> is available in API version 21.0 and later. In API version 26.0 and later, if Experience Cloud sites are enabled for your Salesforce org, the site could also be a Network Visualforce or Network Site.com site.
<code>Status</code>	Type picklist

Field	Description
	Properties Filter, Group, Restricted picklist, Sort
	Description The status for the site. For example, <code>Active</code> or <code>In Maintenance</code> .
Subdomain	Type string
	Properties Filter, Group, Nillable, Sort
	Description If you enabled Salesforce Sites or Digital Experiences before you enabled enhanced domains on your My Domain, this field returns this site's previous subdomain. For example, if your domain was <code>mycompany.force.com</code> , then <code>mycompany</code> is the subdomain. If you enabled Salesforce Sites or Digital Experiences after you enabled enhanced domains, this field returns a null value.
TopLevelDomain	Type url
	Properties Filter, Nillable
	Description The optional branded custom Web address that you registered with a third-party domain name registrar. The custom Web address acts as an alias to your Salesforce address. Beginning with API version 21.0, <code>TopLevelDomain</code> is no longer available. Instead, use the Domain and DomainSite objects.
UrlPathPrefix	Type string
	Properties Filter, Group, Nillable, Sort
	Description The unique Salesforce URL that the public uses to access this site.

Usage

Use this read-only object to query or retrieve information on your site.

Associated Objects

This object has the following associated objects. Unless noted, these associated objects are available in the same API version as this object.

SiteFeed

Feed tracking is available for the object.

SiteHistory

History is available for tracked fields of the object.

SiteDetail

Represents the details of a Salesforce site or Experience Cloud site. Available in API Version 38.0 and later.

Supported SOAP Calls

`describeSObjects()`, `query()`

Supported REST HTTP Methods

GET

Fields

Field	Details
DurableId	Type string Properties Filter, Group, Nillable, Sort Description The ID of the Site object.
IsRegistrationEnabled	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the site allows users to sign up.
SecureUrl	Type url Properties Filter, Group, Nillable, Sort

Field	Details
	Description The URL of the website.

 **Note:** SiteDetail fields are exposed in SOAP API version 45.0 and later. You can use Tooling API to query for SiteDetail fields in guest user mode in API version 44.0 and earlier. In API version 45.0 and later, use SOAP API to get this data in guest user mode. SiteDetail is still exposed in Tooling API to User Profiles with the ViewSetup permission.

SiteDomain

SiteDomain is a read-only object, and a one-to-many replacement for the Site.TopLevelDomain field. This object is available in API version 21.0, and has been deprecated as of API version 26.0. In API version 26.0 and later, use the [Domain](#) and [DomainSite](#) objects instead.

To access this object, Digital Experiences, Salesforce Sites, or Site.com must be enabled.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

- Customer Portal users can't access this object.
- To view this object, you must have the View Setup and Configuration permission.

Fields

Field	Description
Domain	Type url Properties Filter, Sort Description The branded custom Web address within the global namespace identified by this domain's type. In the Domain Name System (DNS) global namespace, this field is the custom Web address that you registered with a third-party domain name registrar. The custom Web address can be used to access the site of this domain.
SiteId	Type reference Properties Filter, Group, Sort

Field	Description
	Description The ID of the associated Site.
DomainType	Type picklist Properties Filter, Group, Sort, Nillable Description The global namespace that this custom Web address belongs to. This value is set to DNS for custom Web addresses in the global DNS. This field is available in version 24.0 of the API.

Usage

Use this read-only object to query the domains that are associated with each site in your organization.

SiteEventLog

SiteEventLog stores details of Site.com requests. Requests can originate from the browser (UI). This object is available in API version 62.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
ClientId	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.

Field	Details
CpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DatabaseTotalTime	Type double Properties Filter, Nillable, Sort Description The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and DB_CPU_TIME. Compare this field to CPU_TIME to determine whether performance issues are occurring in the database layer or in your own code.
HttpHeaders	Type string Properties Filter, Group, Nillable, Sort Description The HTTP headers that were sent in the request.
HttpMethod	Type string Properties Filter, Group, Nillable, Sort Description The HTTP method of the request. For example: GET, POST, PUT, and so on.
IsApi	Type boolean Properties Defaulted on create, Filter, Group, Sort Description The default value is <code>false</code>.
IsError	Type boolean

Field	Details
	Properties Defaulted on create, Filter, Group, Sort Description True if this page was an error page. The default value is <code>false</code>.
IsFirstRequest	Type boolean Properties Defaulted on create, Filter, Group, Sort Description True if this page is the first Visualforce transaction in the request. The default value is <code>false</code>.
IsGuest	Type boolean Properties Defaulted on create, Filter, Group, Sort Description True if this page was a guest (unauthenticated) request. The default value is <code>false</code>.
IsSecure	Type boolean Properties Defaulted on create, Filter, Group, Sort Description True if this request is secure. The default value is <code>false</code>.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCsym5eyvtEK2l.
PageName	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The name of the Visualforce page that was requested.
QueryString	Type string Properties Filter, Group, Nillable, Sort Description The SOQL query, if one was performed.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID. For example: 3nWgxWbDKWWDIk0FKfF5DV.
RequestStatus	Type string Properties Filter, Group, Nillable, Sort Description The status of the request for a page view or user interface action. This field can have a blank value. For example: • S— Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned. • F— Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only. • U— Undefined. • A— Authorization error. • R— Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page. • N— Not Found. 404 error.
RequestType	Type String

Field	Details
	Description The request type. Possible values are: • <code>page</code>—a normal request for a page • <code>content_UI</code>—a content request for a page that originated in the user interface • <code>content_apex</code>—a content request initiated by an Apex call • <code>PDF_UI</code>—a request for a page in PDF format through the user interface • <code>PDF_apex</code>—a request for PDF format by an Apex call (usually a Web Service call)
<code>RunTime</code>	Type double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds.
<code>SessionKey</code>	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
<code>SiteIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the Site.com site.
<code>Timestamp</code>	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example: 20130715233322.670.
<code>Uri</code>	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: <code>home/home.jsp</code>.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 18-character ID of the user who's using Salesforce services through the UI or the API. For example: <code>00530000009M943YAS</code>.
UserType	Type string Properties Filter, Group, Nillable, Sort Description The category of user license. Possible values are: • <code>CsnOnly</code>—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users. • <code>CspLitePortal</code>—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site. • <code>CustomerSuccess</code>—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. • <code>Guest</code>—Users whose access is limited so that your customers can view and interact with your site without logging in. • <code>PowerCustomerSuccess</code>—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy. • <code>PowerPartner</code>—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site. • <code>SelfService</code>—Users whose access is limited because they're organization customers and access the application through a self-service portal. • <code>Standard</code>—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

SiteHistory

Represents the history of changes to the values in the fields of a site. This object is generally available in API version 18.0 and later.

To access this object, Salesforce Sites must be enabled for your organization.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Special Access Rules

- Customer Portal users can't access this object.
- To view this object, you must have the “View Setup and Configuration” permission.

Fields

Field	Details
<code>DataType</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Data type of the field that was changed.
<code>Field</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The name of the field that was changed.
<code>NewValue</code>	Type anyType Properties Nillable, Sort Description The new value of the field that was changed.
<code>OldValue</code>	Type anyType

Field	Details
	Properties Nillable, Sort Description The last value of the field before it was changed.
SiteId	Type reference Properties Filter, Group, Sort Description The ID of the associated Site. This is a relationship field. Relationship Name Site Relationship Type Lookup Refers To Site

SiteframeWhitelistUrl

Represents a list of external domains that you allow to frame your Salesforce site or Experience Cloud site pages. This object is available in API version 44.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. Because changing terms in our code can break current implementations, we maintained this object's name.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

- Customer Portal users can't access this object.
- To view this object, you must have the "View Setup and Configuration" permission.

Fields

Field Name	Details
SiteId	Type reference Properties Create, Filter, Group, Sort Description ID of the site to include in the inline frame. This is a relationship field. Relationship Name Site Relationship Type Lookup Refers To Site
Url	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The domain allowed to frame your Salesforce site or Experience Cloud site page. Accepts these formats: example, example.com, *example.com, and https://example.com.

SiteRedirectMapping

Represents a site redirect from an external site to an Experience Cloud site. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

This object is available only if Digital Experiences is enabled for your org and Create and Set Up Experiences is enabled.

Fields

Field	Details
Action	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The type of the redirect. Possible values are: • Permanent • Temporary
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the redirect is enabled. Default value is <code>false</code>.
IsDynamic	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether a redirect rule is dynamic. Default value is <code>false</code>. This field is available in API version 57.0 and later.
SiteId	Type reference Properties Create, Filter, Group, Sort Description The ID of the site for the redirect. This field is a relationship field. Relationship Name Site Relationship Type Lookup

Field	Details
	Refers To Site
Source	Type url Properties Create, Filter, Sort Description The URL of the site you want to redirect.
Target	Type url Properties Create, Filter, Sort Description The URL of the Experience Cloud site you want to users to visit.

Usage

If you build a new site on Experience Cloud but you also have an old site on a different platform, ensure that users visit the new site. Use SiteRedirectMapping to redirect users from the external site to the Experience Cloud site.

Skill

Represents a category or group of Chat users or service resources in Field Service or Workforce Engagement. This object is available in API version 24.0 and later.



Note: For information about WDC skills on a user's profile, see the [ProfileSkill](#) topic.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
Description	Type textarea Properties Create, Nillable, Update

Field Name	Details
	Description The description of the skill.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. When creating large sets of data, always specify a unique DeveloperName for each record. If no DeveloperName is specified, performance slows down while Salesforce generates one for each record.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the skill.
LastViewedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed the skill.
MasterLabel	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the skill.

Field Name	Details
TypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The skill type associated with the skill. This field is a relationship field. This field is available in API version 58.0 and later. Relationship Name Type Refers To SkillType

Usage

Chat

Use this object to assign Chat users to groups based on their abilities. The skills associated with a LiveChatButton determine which agents receive chat requests that come in through that button.

Field Service

Use this object to track certifications and areas of expertise in your workforce. After you create a skill, you can:

- Assign it to a service resource via the Skills related list on the resource's detail page. When you assign a skill to a service resource, you can specify their skill level and the duration of the skill.
- Add it as a required skill via the Skill Requirements related list on any work type, work order, or work order line item. When you add a required skill to a work record, you can specify the skill level.

Workforce Engagement

Use this object to specify areas of expertise in your workforce. After you create a skill, you can:

- Assign it to a service resource via the Skills related list on the resource's detail page.
- Add it as a required skill via the Skill Requirements related list on a job profile.

SkillLevelDefinition

Represents a skill which can be acquired by completing enablement site (myTrailhead) modules. This object is available in API version 51.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The org must have a Workforce Engagement license and an Enablement Sites (myTrailhead) license. User must have at least one Workforce Engagement permission set assigned to them: Workforce Engagement Analyst, Workforce Engagement Planner, Workforce Engagement Agent.

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Describes the mapping.
IsAutoApproved	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Whether this mapping auto-approves. The default value is 'false'.
LearningContent	Type string Properties Filter, Nillable Description The titles of the Trailhead modules associated to this mapping.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The user who owns the Skill Level Definition. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup

Field	Details
	Refers To Group, User
SkillId	Type reference Properties Create, Filter, Group, Sort, Update Description The skill that this mapping is for. This is a relationship field. Relationship Name Skill Relationship Type Lookup Refers To Skill
SkillLevel	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The level to assign for the skill.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[SkillLevelDefinitionOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[SkillLevelDefinitionShare](#) on page 67

Sharing is available for the object.

SkillLevelProgress

Represents training progress for a given user. This object is available in API version 51.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The org must have a Workforce Engagement license and an Enablement Sites (myTrailhead) license. User must have at least one Workforce Engagement permission set assigned to them: Workforce Engagement Analyst, Workforce Engagement Planner, Workforce Engagement Agent.

Fields

Field	Details
CompletedCount	Type int Properties Create, Filter, Group, Sort, Update Description Number of modules that have been completed towards this Skill Mapping.
CompletedDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date when this progress was completed.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of skill level progress. This is a relationship field. Relationship Name Owner Relationship Type Lookup Refers To User
ServiceResourceId	Type reference Properties Create, Filter, Group, Sort, Update

Field	Details
	Description The Service Resource that will be granted a service resource skill when the progress is complete. This is a relationship field. Relationship Name ServiceResource Relationship Type Lookup Refers To ServiceResource
SkillLevelDefinitionId	Type reference Properties Create, Filter, Group, Sort, Update Description The corresponding skill mapping for this progress. This is a relationship field. Relationship Name SkillLevelDefinition Relationship Type Lookup Refers To SkillLevelDefinition
SkillMasterLabel	Type string Properties Filter, Group, Nillable, Sort Description The master label of the Skill associated with the associated SkillLevelDefinition.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Represents the status of the progress. Possible values are: • A—Approved

Field	Details
	• R—Review • S—Started The default value is 'S'.
TotalCount	Type int Properties Create, Filter, Group, Sort, Update Description The total number of modules that need to be completed.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[SkillLevelProgressOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[SkillLevelProgressShare](#) on page 67

Sharing is available for the object.

SkillProfile

Represents a join between Skill and Profile. This object is available in API version 24.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `update()`, `retrieve()`

Fields

Field Name	Details
ProfileId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the profile.

Field Name	Details
SkillId	Type reference Properties Create, Filter, Group, Sort Description The ID of the skill.

Usage

Use this object to assign specific skills to specific profiles.

SkillRequirement

Represents a skill that is required to complete a particular task in Field Service, Omni-Channel, Salesforce Scheduler, or Workforce Engagement. Skill requirements can be added to pending service routing objects in Omni-Channel. They can be added to work types, work orders, and work order line items in Field Service and Lightning Scheduler. And they can be added to job profiles in Workforce Engagement. This object is available in API version 38.0 and later. You also can add skill requirements to work items in Omni-Channel skills-based routing using API version 42.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

If you want to use SkillRequirement for Field Service use cases, then Field Service must be enabled.

If you want to use SkillRequirement only for Omni-Channel skills-based routing use cases, then you don't need Field Service to be enabled.

If you want to use SkillRequirement for Workforce Engagement use cases, then Workforce Engagement must be enabled.

Fields

Field Name	Details
IsAdditionalSkill	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field Name	Details
	Description Indicates that a skill is additional. After a designated timeout period, a skill marked as additional is dropped from Omni-Channel routing. The case is then routed to the best-matched agent even if they don't have all the skills.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
RelatedRecordId	Type reference Properties Create, Filter, Group, Sort Description The record that the skill is required for. The related record can be a work order, work order line item, work type, or pending service routing record. This is a polymorphic relationship field. Relationship Name RelatedRecord Relationship Type Lookup Refers To WorkOrder, WorkOrderLineItem, WorkType
SkillId	Type reference Properties Create, Filter, Group, Sort, Update

Field Name	Details
	Description The skill that is required. This is a relationship field. Relationship Name Skill Relationship Type Lookup Refers To Skill
SkillLevel	Type double Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description The level of the skill required. Skill levels can range from zero to 99.99. Depending on your business needs, you can have the skill level to reflect years of experience, certification levels, or license classes.
SkillNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-generated number identifying the skill requirement.
SkillPriority	Type int Properties Aggregatable, Create, Filter, Group, Nillable, Sort, Update Description For additional skills, specify the order in which skills are dropped if after the specified timeout no agent with that skill is available. Higher priority-value skills are dropped first. Lower priority-value skills, for example 0, are dropped last. Skills with the same priority value are dropped as a group. You can set skill priority using skills-based routing rules or Apex code.

Usage

Field Service

Skill requirements help dispatchers assign work orders to service resources with the proper expertise. You can still assign a work order, work order line item, or related service appointment to a service resource that does *not* have the specified skills, so skill requirements serve more as a suggestion than a rule.



Note: If you're using the Field Service managed package, use matching rules to ensure that appointments are only assigned to service resources who possess the skills listed on the parent work order.

If many of your work orders require the same skills, add skill requirements to work types to save time and keep your processes consistent. When you add a skill requirement to a work type, work orders and work order line items that use that type automatically inherit the skill requirement. For example, if all annual maintenance visits for your Classic Refrigerator product require a Refrigerator Maintenance skill level of at least 50, add that skill requirement to the Annual Maintenance Visit work type. When you create a work order for a customer's annual fridge maintenance, applying that work type adds the skill requirement as well.

Omni-Channel

We recommend that you use Omni-Channel flow or skills-based routing rules to create skills-based routing requests. When you do so, work items are routed by creating a PendingServiceRouting object. The PendingServiceRouting object can have multiple SkillRequirements objects associated with it. When a work item requires multiple skills, it's routed to an agent who has all of the required skills. The PendingServiceRouting object adds attributes to the work item that represent the skill (skill id), priority, skill proficiency, and timestamp.

Workforce Engagement

Workforce Engagement uses skill requirements to assign shifts to agents who have the right skills. You can still assign shifts to service resources if they don't have those skills.

In a non-Omni workflow, create a scheduling rule that matches agents to shifts based on their skills and the job profile's skill requirements. Shift scheduling tools can then assign agents with the right skills.

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

SkillRequirementChangeEvent (API version 54.0)

Change events are available for the object.

SkillRequirementFeed

Feed tracking is available for the object.

SkillRequirementHistory

History is available for tracked fields of the object.

SkillUser

Represents a join between Skill and User. This object is available in API version 24.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `update()`, `query()`, `retrieve()`

Fields

Field Name	Details
<code>SkillId</code>	Type reference Properties Create, Filter, Group, Sort Description The ID of the skill.
<code>UserId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the user.

Usage

Use this object to assign specific skills to specific users.

SlackChannelRelatedRecord

Represents the related record mapping between a Slack channel and a Salesforce record that's made when you create a Salesforce channel. This object is available in API version 65.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
<code>Name</code>	Type string Properties Filter, Sort Description The name of the related record mapping.

Field	Details
RelatedRecord	Type string Properties Filter, Group, Sort Description The Salesforce record ID associated with the related record mapping.
SlackChannel	Type string Properties Filter, Group, Nillable, Sort Description The Slack channel ID of the Salesforce channel associated with the related record mapping.
TopLevelTeam	Type string Properties Filter, Group, Nillable, Sort Description The Slack Enterprise org ID associated with the Salesforce channel.

Usage

Use this object to retrieve and query the related record mapping between a Slack channel and a Salesforce record. You can select this object in Salesforce Flow Builder and Slack Workflow Builder to trigger actions when a Salesforce channel is created.

This object is read only. You can't create, modify, or delete the related record mappings between Slack channels and Salesforce records using this object.

SlaProcess

Represents an entitlement process associated with an Entitlement. This object is available in API version 19.0 and later.

An entitlement process is a timeline that includes all the steps (MilestoneType records) that your support team must complete to resolve cases. Each process includes the logic necessary to determine how to enforce the correct service level for your customers.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`, `search()`, `describeLayout()`

Special Access Rules

As of Summer '20 and later, only Salesforce admin users, users with access to the Case, Entitlement, or Work Order objects, and users with the View Setup and Configuration permission can access this object.

Fields

Field	Details
BusinessHoursId	Type reference Properties Filter, Group, Nillable, Sort Description Required. ID of the BusinessHours associated with the entitlement. Must be a valid business hours ID.
Description	Type textarea Properties Filter, Nillable Description A description of the entitlement process.
IsActive	Type boolean Properties Defaulted on create, Filter Description Indicates whether the entitlement process is active (<code>true</code>) or not (<code>false</code>).
IsVersionDefault	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the entitlement process is the default version (<code>true</code>) or not (<code>false</code>). This field is available in API version 28.0 and later in organizations that have entitlement versioning enabled.
LastViewedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The date when the SlaProcess was last viewed.
Name	Type string Properties Filter, idLookup Description The name of the entitlement process.
NameNorm	Type string Properties Filter, Group, Sort Description The read-only value for the unique name of the entitlement process or the entitlement process version. If entitlement versioning is enabled, this value is automatically generated for each version of an entitlement process in this form: <i>process name+_v + x</i>, where <i>x</i> is the version number (for example, "gold_support_v2"). If entitlement versioning isn't enabled, this value is the same as <i>Name</i>. This field is available in API version 28.0 and later.
SObjectType	Type picklist Properties Restricted picklist, Filter, Group, Sort Description The type of records that the entitlement process can run on. Its values are: • <i>Case</i> • <i>Work Order</i> An entitlement process runs only on records that match its type. For example, a Case entitlement process that's applied to an entitlement runs only on cases associated with the entitlement, not on work orders. As a best practice, therefore, manage customers' work orders and cases on separate entitlements. The field label in the user interface is Entitlement Process Type.
StartDateField	Type picklist

Field	Details
	Properties Filter, Restricted picklist Description The criteria for cases to enter the entitlement process. Cases can enter the process based on: • The creation date on a case • A custom date/time field on a case
VersionMaster	Type string Properties Filter, Group, Nillable, Sort Description Identifies the sequence of versions to which this entitlement process belongs. This field's contents can be any value as long as it is identical among all versions of the entitlement process. This field is available in API version 28.0 and later in organizations that have entitlement versioning enabled.
VersionNotes	Type textarea Properties Filter, Group, Nillable, Sort Description The description of the entitlement process version. This field is available in API version 28.0 and later in organizations that have entitlement versioning enabled.
VersionNumber	Type int Properties Filter, Group, Nillable, Sort Description The version number of the entitlement process. Must be 1 or greater. This field is available in API version 28.0 and later in organizations that have entitlement versioning enabled.

Usage

Use this object to query entitlement processes on entitlements.

SEE ALSO:

- [Entitlement](#)
- [MilestoneType](#)
- [CaseMilestone](#)

Snippet

Represents a snippet, which is a container for rich text that can be reused across Account Engagement emails and email templates. This object is available in API version 47.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Snippets are available in Account Engagement business units with the Sales, CRM, or Service permission set license.

Fields

Field	Details
Description	Type textarea Properties Create, Nillable, Update Description The description of the snippet. Limited to 32 KB.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description Required. This field value is unique to your org and is required for a Snippet to be resolved in marketing content. Label is API Name.
LastReferencedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. The name of the snippet.
Type	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The type of content a snippet includes. Allowable values are: Date, Image, Link, Text. This field is for organizational purposes.
Value	Type textarea Properties Create, Nillable, Update Description The body content of a snippet. This field can contain plain or rich text. The value of a snippet is resolved when a marketing email is sent. The field does not support emojis, HTML, or image files.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

SnippetFeed

Feed tracking is available for the object.

SnippetAssignment

Represents a relationship between a snippet and a campaign. Assignments are required to use snippet content in Account Engagement emails and email templates. A snippet can be assigned to more than one campaign. This object is available in API version 47.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Snippets are available in Account Engagement business units with the Sales, CRM, or Service permission set license.

Fields

Field	Details
ParentId	Type reference Properties Create, Filter, Group, Sort Description ID of the parent object
SnippetId	Type reference Properties Create, Filter, Group, Sort Description ID of the related snippet record

SoapApiEventLog

SOAP API events contain details about your org's SOAP API request activity. This object is available in API version 61.0 and later.

 **Note:** This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
ApiType	Type string Properties Filter, Group, Nillable, Sort Description The type of API request. Possible values are: • D—Apex Class • E—SOAP Enterprise • M—SOAP Metadata • P—SOAP Partner • S—SOAP Apex • T—SOAP Tooling • f—Feed • l—Live Agent • p—SOAP ClientSync
ClientIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96.43.144.26.
ClientName	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The name of the client that's using Salesforce services. This field is an optional parameter that can be passed in API calls. If blank, the caller didn't specify a client in the CallOptions header.
CpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DatabaseBlocks	Type double Properties Filter, Nillable, Sort Description Indicates how much activity is occurring in the database. A high value for this field suggests that adding indexes or filters on your queries would benefit performance.
DatabaseCpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds to complete the request. Indicates the amount of activity taking place in the database layer during the request.
DatabaseTotalTime	Type double Properties Filter, Nillable, Sort Description The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and DatabaseCpuTime. Compare this field to CpuTime to determine whether performance issues are occurring in the database layer or in your own code.
ExceptionMessage	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The exception message for a SOAP API request. An exception message gives details about errors in handling an API request, such as why an API request failed. For example: <code>common.exception.ApiException: startDate cannot be more than 30 days ago.</code>
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: <code>GeJCsym5eyvtEK2I.</code>
MethodName	Type string Properties Filter, Group, Nillable, Sort Description The name of the calling Apex method.
ObjectName	Type string Properties Filter, Group, Nillable, Sort Description The name of the object accessed by the API request. For example: <code>Account</code>, <code>Opportunity</code>, <code>Contact</code>, and so on.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestIdentifier</code>. For example: <code>3nWgxWbDKWWDIk0FKfF5DV.</code>
RequestSize	Type double Properties Filter, Nillable, Sort

Field	Details
	Description The size of the callout request body, in bytes.
RequestStatus	Type String Description The status of the request for a page view or user interface action. For example: • S—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned. • F—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only. • U—Undefined • A—Authorization Error • R—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page. • N—Not Found. 404 error. This field can have a blank value.
ResponseSize	Type double Properties Filter, Nillable, Sort Description The size of the callout response, in bytes.
RowsProcessed	Type int Properties Filter, Group, Nillable, Sort Description The number of rows that were processed in the request. For example: 150.
RunTime	Type double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds.

Field	Details
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: /home/home.jsp.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.
UserType	Type string Properties Filter, Group, Nillable, Sort Description The category of user license. Possible values are: • <code>CsnOnly</code>—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users.

Field	Details
	CspLitePortal—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site. CustomerSuccess—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Guest—Users whose access is limited so that your customers can view and interact with your site without logging in. PowerCustomerSuccess—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy. PowerPartner—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site. SelfService—Users whose access is limited because they're organization customers and access the application through a self-service portal. Standard—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

SocialPersona

Represents a snapshot of a contact's profile on a social network such as Facebook or Twitter. This object is available in API version 22.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
<code>AreWeFollowing</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Specifies whether a Salesforce social account is following the social persona or not.

Field Name	Details
AuthorLabels	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Comma-separated list of author type tags.
AvatarUrl	Type string Properties Nillable Description Retrieves the user's social network avatar. It's a read-only field and you can't specify or update its value.
Bio	Type textarea Properties Create, Nillable, Update Description Biography of the social persona.
ExternalId	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the social persona on the social network.
ExternalPictureURL	Type url Properties Create, Filter, Group, Nillable, Sort, Update Description URL to the picture of the social persona on the social network.
Followers	Type int Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description Number of followers that the social persona has.
Following	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Number of people that the social persona is following.
InfluencerScore	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Radian6 score describing the influence of the social persona. No longer used.
IsBlacklisted	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Specifies whether the social persona is blacklisted or not.
IsDefault	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Specifies whether the social persona supplies the default avatar image that's displayed on the contact or account.
IsFollowingUs	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Specifies whether the social persona is following a Salesforce social account or not.
IsVerified	Type boolean

Field Name	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Specifies whether the social persona is verified or not.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Date and time when the social persona was last referenced.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Date and time when the social persona was last viewed.
ListedCount	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Radian6 field. No longer used.
MediaProvider	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Social network of the social persona.
MediaType	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Social network type of the social persona.
Name	Type string

Field Name	Details
	Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the social persona.
NumberOfFriends	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Number of friends that the social persona has.
NumberOfTweets	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Number of tweets made by the social persona.
ParentId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the contact parent record for the social persona. This is a polymorphic relationship field. Relationship Name Parent Relationship Type Lookup Refers To Account, Contact, Lead, SocialPost
ProfileType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Type of profile. Values are: • Person • Page

Field Name	Details
ProfileUrl	Type url Properties Create, Filter, Group, Nillable, Sort, Update Description URL for the profile.
Provider	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Social network, such as Facebook or Twitter, of the social persona.
R6SourceId	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the social persona in Social Studio.
RealName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Real name of the social persona.
SourceApp	Type string Properties Create, Filter, Group, Nillable, Sort Description Salesforce product that created the social persona.
TopicType	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Type of topic, such as keyword or managed.

Usage

The fields on a SocialPersona object don't provide real-time data. They provide a snapshot of information from the last time Salesforce collected a post from the social persona. Many of the Radian6-related fields are no longer accurate or used.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

SocialPersonaHistory (API version 26.0)

History is available for tracked fields of the object.

SocialPost

Represents a snapshot of a post on a social network such as a Facebook or Twitter. This object is available in API version 23.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
AnalyzerScore	Type double Properties Create, Filter, Nillable, Sort, Update Description Score set on the social post in Social Studio.
AssignedTo	Type string Properties Create, Filter, Group, Nillable, Sort Description User in Social Studio that the social post is assigned to.
AttachmentType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Type of the first attachment on the social post. Values are:

Field Name	Details
	- APPLICATION - AUDIO - IMAGE - LINK - TEXT - UNKNOWN - VIDEO
AttachmentUrl	Type url Properties Create, Filter, Group, Nillable, Sort, Update Description URL for the first attachment on the social post.
Classification	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Classification for the social post, such as inquiry or customer case.
CommentCount	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Number of comments on the social post.
Content	Type textarea Properties Create, Nillable, Update Description Body of the social post.
DeletedById	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description If the social post is deleted, ID of the person who deleted the social post. This is a relationship field. Relationship Name DeletedBy Relationship Type Lookup Refers To User
EngagementLevel	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Engagement level of the social post, such as reviewed or resolved.
ExternalPostId	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the social post in its social network.
Handle	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Handle of the person who posted the social post.
HarvestDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date and time when Social Studio collected the social post.
Headline	Type string

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Headline of the social post.
HiddenById	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description If the social post is hidden, ID of the person who hid it. This is a relationship field. Relationship Name HiddenBy Relationship Type Lookup Refers To User
InboundLinkCount	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Number of links on the inbound social post.
IsOutbound	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Specifies whether the social post is outbound or not.
KeywordGroupName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Radian6 field that is no longer used.

Field Name	Details
Language	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Language of the social post.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Date when the social post was last referenced.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Date when the social post was last viewed.
LikedBy	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the managed social account in the social network that liked the social post.
LikesAndVotes	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Radian6 number of likes and votes on the social post.
MediaProvider	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Social network of the social post.

Field Name	Details
MediaType	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Type of social network of the social post.
MessageType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Type of message. Values are: • Comment—Facebook comment • Direct—Twitter direct message • Post—Facebook post • Private—Facebook private message • Reply—Twitter or Facebook reply • Retweet—Twitter retweet • Tweet—Twitter tweet
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the social post.
Notes	Type textarea Properties Create, Nillable, Update Description Notes added by Social Hub actions for the social post.
OutboundSocialAccountId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the social account used for outbound social posts.

Field Name	Details
	This is a relationship field. Relationship Name OutboundSocialAccount Relationship Type Lookup Refers To ExternalSocialAccount
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of the social post. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ParentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the parent record of the social post, for example, the ID of a case. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To Case
PersonaId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description ID of the social persona who made the post. This is a relationship field. Relationship Name Persona Relationship Type Lookup Refers To SocialPersona
PostPriority	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Priority of the social post set in Social Studio.
PostTags	Type textarea Properties Create, Nillable, Update Description Comma-separated list of tags on the social post.
PostUrl	Type url Properties Create, Filter, Group, Nillable, Sort, Update Description URL for the social post.
Posted	Type dateTime Properties Create, Defaulted on create, Filter, Sort, Update Description Date and time when the social post was made.
Provider	Type picklist

Field Name	Details
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Social network of the social post.
R6PostId	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description Unique ID of the post in Social Studio.
R6SourceId	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the author in Social Studio.
R6TopicId	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description ID for either the topic profile or the managed account in Social Studio.
Recipient	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the recipient of the social post in Social Studio.
RecipientType	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Type of the recipient of the social post, such as a person.
ReplyToId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort Description Dynamically generated from replyToExternalPostId in Social Studio. This is a relationship field. Relationship Name ReplyTo Relationship Type Lookup Refers To SocialPost
ResponseContextExternalId	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description External ID, such as a conversation ID, author ID, or post ID, for the item you're responding to.
ReviewScale	Type double Properties Create, Filter, Nillable, Sort, Update Description Review scale for the social post.
ReviewScore	Type double Properties Create, Filter, Nillable, Sort, Update Description Review score for the social post.
ReviewedStatus	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description Status of the social post review.

Field Name	Details
Sentiment	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Sentiment of the social post. Values are: - Negative - Neutral - Positive - SomewhatNegative - SomewhatPositive
Shares	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Number of times the social post has been shared.
SourceTags	Type textarea Properties Create, Nillable, Update Description Comma-separated list of author type tags.
SpamRating	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Spam rating of the social post. Values are: - NotSpam - Spam
Status	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field Name	Details
	Description Status of the social post. Values are: - DELETED - FAILED - HIDDEN - PENDING - PENDING_APPROVAL - RECALL_APPROVAL - REJECTED_APPROVAL - REPLIED - SENT - UNKNOWN
StatusMessage	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Status message for the social post.
ThreadSize	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Radian6 field. No longer used.
TopicProfileName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Name of the topic profile for the social post in Social Studio.
TopicType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Type of topic. Values are:

Field Name	Details
	- Keyword - Managed
TruncatedContent	Type string Properties Filter, Group, Nillable, Sort Description Truncated content of the social post.
UniqueCommentors	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Number of unique people who commented on the social post.
ViewCount	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Number of times the social post was viewed.
WhoId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Polymorphic ID of a person such as a lead or a contact. This is a polymorphic relationship field. Relationship Name Who Relationship Type Lookup Refers To Account, Contact, Lead

Usage

The fields on a SocialPost object don't provide real-time data. They provide a snapshot of information from the last time Salesforce collected the post from the social network. Many of the Radian6-related fields are no longer accurate or used.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

SocialPostChangeEvent (API version 48.0)

Change events are available for the object.

SocialPostFeed (API version 26.0)

Feed tracking is available for the object.

SocialPostHistory (API version 26.0)

History is available for tracked fields of the object.

SocialPostOwnerSharingRule

Sharing rules are available for the object.

SocialPostShare

Sharing is available for the object.

Solution

Represents a detailed description of a customer issue and the resolution of that issue.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted .
IsHtml	Type boolean

Field	Details
	Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the Solution is an HTML solution (<code>true</code>) or not (<code>false</code>).
IsOutOfDate	Type boolean Properties Defaulted on create, Filter Description Read-only field that indicates whether a solution master has been updated since the translated version was created (<code>true</code>) or not (<code>false</code>). Note that this field does not appear in the page layout of master solutions.
IsPublished	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the Solution has been published (<code>true</code>) or not (<code>false</code>). A solution's published state does not affect how it can be used, or whether you can query, update, or delete it. Label is Public. Prior to Spring '14, the label was Visible in Self-Service Portal
IsPublishedInPublicKb	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the Solution has been published as a Public Solution (<code>true</code>) or not (<code>false</code>). Label is Visible in Public Knowledge Base. This field only applies to solutions, not articles in the public knowledge base.
IsReviewed	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the Solution has been reviewed (<code>true</code>) or not (<code>false</code>). This flag can only be set indirectly via the <code>Status</code> picklist. Each predefined <code>Status</code> value implies an <code>IsReviewed</code> value. Label is Reviewed.

Field	Details
LastReferencedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp when the current user last interacted with this record, directly or indirectly.
LastViewedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (LastReferencedDate), but not viewed it.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the User who owns the Solution. This is a relationship field. Relationship Name Owner Relationship Type Lookup Refers To User
ParentId	Type reference Properties Create, Defaulted on create, Filter, Update Description ID of the master solution, if this is the translation of a master solution.
RecordTypeId	Type reference Properties Create, Filter, Nillable, Update

Field	Details
	Description ID of the RecordType to which the Solution is associated.
SolutionLanguage	Type picklist Properties Create, Filter, Restricted picklist, Update Description The language that the solution is written in, such as <code>French</code> or <code>Chinese (Traditional)</code> .
SolutionName	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. If a client application creates a new Solution and a value for this field is unspecified, a hyphen (-), the default value for this field, is used. Limit: 255 characters. Label is Title .
SolutionNote	Type textarea Properties Create, Nillable, Update Description The details of the Solution record. Limit: 32,000 characters. Label is Solution Details . If you have HTML Solutions enabled, any HTML tags used in this field are verified before the object is created or updated. If invalid HTML is entered, an error is thrown. Any JavaScript used in this field is removed before the object is created or updated.
SolutionNumber	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description An identifying number that is assigned automatically when a solution is created. It can't be set directly, and it can't be modified.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Required. The status of the solution. Directly controls the <code>IsReviewed</code> value. To obtain the status values in the picklist, a client application can query the <code>SolutionStatus</code> .
<code>TimesUsed</code>	Type int Properties Filter, Group, Sort Description Number of times this solution has been used. Label is Num Related Case .

Usage

Use this object to manage your organization's solutions. Client applications can create, update, delete, and query Attachment records associated with a solution.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

SolutionFeed (API version 18.0)

Feed tracking is available for the object.

SolutionHistory

History is available for tracked fields of the object.

SEE ALSO:

[CategoryData](#)

[CategoryNode](#)

SolutionStatus

Represents the status of a Solution, such as Draft, Reviewed, and so on.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. Because changing terms in our code can break current implementations, we maintained this object's name.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
ApiName	Type string Properties Filter, Group, idLookup, Sort Description Uniquely identifies a picklist value so it can be retrieved without using an id or primary label.
IsDefault	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this is the default solution status value (<code>true</code>) or not (<code>false</code>) in the picklist. Only one value can be the default value.
IsReviewed	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this solution status value represents a reviewed Solution (<code>true</code>) or not (<code>false</code>). Multiple solution status values can represent a reviewed Solution.
MasterLabel	Type string Properties Filter, Group, Nillable, Sort Description Label for this solution status value. This display value is the internal label that does not get translated.
SortOrder	Type int Properties Filter, Group, Nillable, Sort Description Number used to sort this value in the solution status picklist. These numbers are not guaranteed to be sequential, as some previous solution status values might have been deleted.

Usage

This object represents a value in the solution status picklist. The solution status picklist provides additional information about the status of a Solution, such as whether a given status value represents a reviewed or unreviewed solution. Your client application can query this object to retrieve the set of values in the solution status picklist, and then use that information while processing Solution objects to determine more information about a given solution. For example, the application could test whether a given case has been reviewed or not based on its `Status` value and the value of the `IsReviewed` property in the associated SolutionStatus record.

SEE ALSO:
[Solution](#)

SolutionTag

Associates a word or short phrase with a Solution.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
ItemId	Type reference Properties Create, Filter Description ID of the tagged item.
Name	Type string Properties Create, Filter Description Name of the tag. If this value does not already exist, a new TagDefinition is created and becomes the parent of this Tag object. Otherwise, a TagDefinition with the same name becomes the parent of this Tag object. Parent relationships are created automatically.
TagDefinitionId	Type reference Properties Filter

Field Name	Details
	Description ID of the parent TagDefinition object that owns the tag.
Type	Type picklist Properties Create, Filter, Restricted picklist Description Defines the visibility of a tag. Valid values: • <code>Public</code>—The tag can be viewed and manipulated by all users in an organization. • <code>Personal</code>—The tag can be viewed or manipulated only by a user with a matching <code>OwnerId</code>.

Usage

SolutionTag stores the relationship between its parent TagDefinition and the Solution being tagged. Tag objects act as metadata, allowing users to describe and organize their data.

When a tag is deleted, its parent TagDefinition will also be deleted if the name is not being used; otherwise, the parent remains. Deleting a TagDefinition sends it to the Recycle Bin, along with any associated tag entries.

SOSDeployment

Represents the general settings for deploying SOS video call capability in a native mobile application. This object is available in API version 34.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update

Field Name	Details
	Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the deployment.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The name of the deployment.
OptionsIsBackwardFacingCameraEnabled	Type boolean Properties Create, Filter, Update Description Determines whether customers can use the backwards-facing camera on their mobile devices to talk to SOS agents.
OptionsIsEnabled	Type boolean Properties Create, Filter, Update

Field Name	Details
	Description Determines whether the deployment is enabled for customers to request new SOS video calls.
OptionsIsVoiceOnlyMode	Type boolean Properties Create, Filter, Update Description Determines whether video functionality is disabled for customers, making it so customers can only talk to SOS agents using only audio.
QueueId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the queue that's associated with the SOS deployment.

Usage

Use this object to query and manage SOS deployments.

SOSSession

This object is automatically created for each SOS session and stores information about the session. This object is available in API versions 34.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
AppVersion	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The version of the customer's mobile application in which SOS is implemented.
CaseId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the case that's associated with the SOS session.
ContactId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the contact that's associated with the SOS session.
DeploymentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the SOS deployment that the SOS session originated from.
EndTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The time that the SOS session ended.
IpAddress	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description To protect the customer's privacy, this field is now blank.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field Name	Details
	Description The date and time that the session record was last referenced by a user.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the session record was last viewed.
Name	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description The name of the session.
OpentokSession	Type encryptedstring Properties Create, Nillable, Update Description The ID of the OpenTok session that's associated with the SOS video call.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the session record's owner.
SessionDuration	Type int Properties Filter, Group, Nillable, Sort Description The amount of time that the SOS session lasted.
SessionRecordingUrl	Type url Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The URL where the SOS session recording is stored.
SosVersion	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The version of SOS that was used in your organization's mobile application when this session occurred.
StartTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The time that the SOS session began.
SystemInfo	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Information about the customer's mobile device from which the SOS call originated, such as the device's operating system.
WaitDuration	Type int Properties Filter, Group, Nillable, Sort Description The amount of time the customer waited before an agent accepted the SOS session and the call began.

Usage

Use this object to query and manage SOS session records.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

SOSSessionFeed

Feed tracking is available for the object.

SOSSessionHistory

History is available for tracked fields of the object.

SOSSessionOwnerSharingRule

Sharing rules are available for the object.

SOSSessionShare

Sharing is available for the object.

SOSSessionActivity

Captures information about specific events that occur during an SOS video call, such as when an SOS call begins or ends. This object is available in API version 34.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
ActivityTime	Type dateTime Properties Create, Filter, Sort Description The time at which the activity occurred.
Name	Type string Properties Autonumber, Defaulted on create, idLookup, Filter, Sort Description The name of the activity.
SessionId	Type reference Properties Create, Filter, Group, Sort Description The ID of the SOS session that’s associated with the event.

Field Name	Details
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The kind of activity that occurred.

Usage

Use this object to query and manage SOS session activities.

StagedEmail

For internal use only.

StagedInviteeEmail

Represents an email address that is included on a calendar event but that doesn't match an existing user, contact, or lead record. This object is available in API version 66.0 and later.

Supported Calls

`delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`

Special Access Rules

This object is available with Einstein Activity Capture when Sync Email as Salesforce Activity is turned on.

Fields

Field	Details
Name	Type email Properties Filter, Group, idLookup, Sort Description The invited email address.
OwnerId	Type reference

Field	Details
	Properties Filter, Group, Sort
	Description The ID of the record owner. This field is a polymorphic relationship field.
	Relationship Name Owner
	Refers To Group, User

StagedUnmtchdEmailAddr

Represents data about an email address identified by Einstein Activity Capture that doesn't match to an existing user, contact, or lead record. These addresses are only stored temporarily. Related to StagedUnmtchdEmailAddrRela, which represents data about the email message or calendar event activity associated with an unmatched email. This object is available in API version 66.0 and later.

These addresses are only stored temporarily. An unmatched email address is automatically deleted from StagedUnmtchdEmailAddr if it converts into a contact record. To convert, a user saves it from their Suggested Contacts list or the address crosses a threshold in the automatic contact creation setting. An unmatched email address is also deleted after 30 days from the initial appearance without subsequent activity.

Supported Calls

`delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`

Special Access Rules

This object is available with Einstein Activity Capture when Sync Email as Salesforce Activity is turned on. If you turn on Einstein Activity Capture in Summer '25 or later, Sync Email as Salesforce Activity is enabled by default.

Fields

Field	Details
CreatedContactOrLeadId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description The ID for the contact or lead record created from a suggestion. Read only.

Field	Details
	This field is a polymorphic relationship field. Relationship Name CreatedContactOrLead Refers To Contact, Lead
EmailAddress	Type email Properties Filter, Group, idLookup, Sort Description The email address of the suggested contact. This address doesn't match any existing user, contact, or lead. (Read only.)
FirstName	Type string Properties Filter, Group, Nillable, Sort, Update Description First name of the suggested contact.
IgnoreSuggestionEndDate	Type date Properties Filter, Group, Nillable, Sort, Update Description If a user dismisses a suggestion, it isn't suggested again until this date.
LastInteractionDate	Type date Properties Filter, Group, Nillable, Sort Description The date the user last interacted with the unmatched email address through email or a scheduled calendar event. (Read only.)
LastName	Type string Properties Filter, Group, Nillable, Sort, Update Description Last name of the suggested contact.

Field	Details
OccurrenceCount	Type int Properties Filter, Group, Nillable, Sort Description Total number of times the user and the unmatched email address occur together. (Read only.)
UserId	Type reference Properties Filter, Group, Sort Description The unique ID of the user associated with the unknown email address. (Read only.) This field is a relationship field. Relationship Name User Refers To User

StagedUnmtchdEmailAddrRela

Represents data about the message or event activity associated with an email address that Einstein Activity Capture can't match with an existing user, contact, or lead record. Related to StagedUnmtchdEmailAddr, which represents data about the unmatched email address. This object is available in API version 66.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is available with Einstein Activity Capture when Sync Email as Salesforce Activity is turned on. If you turn on Einstein Activity Capture in Summer '25 or later, Sync Email as Salesforce Activity is enabled by default.

Fields

Field	Details
RelatedActivityId	Type reference Properties Filter, Group, Sort Description The unique ID of the related activity record, such as an email message or calendar event. This field is a polymorphic relationship field. Relationship Name RelatedActivity Refers To EmailMessage, Event, StagedEmail
SourceActivity	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The activity type. Possible values are: • Event • StagedEmail • EmailAddress
StagedUnmatchedEmailAddressId	Type reference Properties Filter, Group, Sort Description The unique ID of the related unmatched email address record. This field is a relationship field. Relationship Name StagedUnmatchedEmailAddress Relationship Type Master-detail Refers To StagedUnmtchdEmailAddr

Stamp

Represents a User Specialty. This object is available in API version 39.0 and later.

Create User Specialty labels. Specialties can be any term you want, up to 50 characters, including spaces and underscores.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Description
Description	Type string Properties Filter, Group, Nillable, Sort Description Use this field to describe what the user specialty means and how it applies to a user. You have a 255 character maximum including spaces and underscores.
MasterLabel	Type string Properties Filter, Group, Sort Description The User Specialty label that appears under the user's profile picture. You can create any label you want as long as it's within the 50 character maximum, including spaces and underscores.
ParentId	Type reference Properties Filter, Group, Sort Description The id of the org or network. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To Organization

StampAssignment

Represents assignment of a User Specialty to a user. This object is available in API version 39.0 and later.

Assign a User Specialty to users. This label appears beneath their profile photo.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
StampId	Type reference Properties Filter, Group, Sort Description The unique id generated when creating a user specialty. This is a relationship field. Relationship Name Stamp Relationship Type Lookup Refers To Stamp
SubjectId	Type reference Properties Filter, Group, Sort Description The id for the user getting the User Specialty label. This is a relationship field. Relationship Name Subject Relationship Type Lookup Refers To User

StandardInvocableActionType

Represents a collection of fields to set up granular user permissions for access to a standard invocable action in Flow Builder. This object is available in API version 60.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Marketing Cloud Growth edition and the Manage Flow user permission or View Flows user permission are required.

Fields

Field	Details
DeveloperName	Type string Properties Filter, Group, Sort Description The developer name and namespace combination of the invocable action. This combination must be unique.
Language	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The language code of the invocable action. For a full list of supported languages and their codes, see Supported Languages . This field is available in API version 60.0 and later.
MasterLabel	Type string Properties Filter, Group, Sort Description The label for the invocable action. This display value is the internal label that doesn't get translated. This field is available in API version 60.0 and later.
Namespace	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort
	Description The namespace of the invocable action. Enter a value only if you're using the invocable action in Flow Builder or with Apex.

StandardShippingRate

Standard shipping rate for a store. This object is available in API version 59.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The StandardShippingRate object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
ConditionFactor	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Conditions that affect the shipping rate. Possible values are: • <code>OrderPriceFactor</code>—Condition based on the order price value. • <code>OrderWeightFactor</code>—Condition based on delivery weight. This value is available in API version 62.0 and later.
ConditionRangeMax	Type double Properties Create, Filter, Nillable, Sort, Update Description Maximum value of the shipping rate condition.

Field	Details
ConditionRangeMin	Type double Properties Create, Filter, Nillable, Sort, Update Description Minimum value of the shipping rate condition. This value can't be negative.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Currency ISO code of the cart. Possible values are: • EUR—Euro • USD—U.S. Dollar The default value is USD.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the standard shipping rate.
Price	Type currency Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description Price of standard shipping.
ShippingCarrierMethodId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the shipping service carrier method. This field is available in API version 61.0 and later. This field is a relationship field.

Field	Details
	Relationship Name ShippingCarrierMethod Relationship Type Lookup Refers To ShippingCarrierMethod
ShippingZoneId	Type reference Properties Create, Filter, Group, Sort Description ID of the shipping zone. This field is a relationship field. Relationship Name ShippingZone Relationship Type Parent-detail Refers To ShippingRateArea (the master object)
TransitTimeMax	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Maximum value of the shipping transit time. This field is available in API version 61.0 and later.
TransitTimeMin	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Minimum value of the shipping transit time. This value can't be negative. This field is available in API version 61.0 and later.
TransitTimeUnit	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description Unit of value for shipping transit time. This field is available in API version 61.0 and later. Possible values are: • Days • Hours • Weeks
WeightUnit	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Unit of measurement for the weight of the cart items. This field is available in API version 62.0 and later. Possible values are: • Grams • Kilograms • Ounces • Pounds

StaticResource

Represents a static resource that can be used in Visualforce markup.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Fields

Field	Details
Body	Type base64 Properties Create, Nillable, Update Description Required. Encoded file data.

Field	Details
BodyLength	Type int Properties Filter, Group, Sort Description Size of the file (in bytes).
CacheControl	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The sharing policy for the static resource when cached. The cache control can have one of these values: • <code>Private</code> specifies that the static resource is accessible to all authenticated users. The static resource is stored on the Salesforce server in a user's individual cache for the duration of the session. • <code>Public</code> specifies that the static resource is accessible after caching to all internet traffic, including unauthenticated users. The resource is stored on the Salesforce server in a shared cache, which results in faster load times.
ContentType	Type string Properties Create, Filter, Group, Sort, Update Description Type of content. Label is Mime Type. Limit: 120 characters.
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Text description of the static resource. Limit: 255 characters.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Name of the static resource.

Field	Details
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix. This field can't be accessed unless the logged-in user has the Customize Application permission.

Usage

Use static resources to upload content that you can reference in Visualforce markup, including archives (such as .zip and .jar files), images, stylesheets, JavaScript, and other files. Using a static resource is preferable to uploading a file to the Documents tab because:

- You can package a collection of related files into a directory hierarchy and upload that hierarchy as a .zip or .jar archive.
- You can reference a static resource in page markup by name using the `$Resource` global variable instead of hard-coding document IDs.

Encoded Data

The API sends and receives the binary file data encoded as a base64 data type. Prior to creating a record, clients must encode the binary file data as base64. Upon receiving an API response, clients must decode the base64 data to binary. The SOAP client usually handles this conversion.

Maximum Static Resource Size

You can create or update static resources to a maximum size of 5 MB. An organization can have up to 250 MB of static resources, total.

SEE ALSO:

- [ApexComponent](#)
- [ApexPage](#)
- [Developer Guide: Visualforce Developer Guide](#)

StoreIntegratedService

Represents an association between an integration and a store. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The StoreIntegratedService object is available only if the B2B Commerce license is enabled.

Fields

Field	Details
Integration	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. The integration ID. Possible values are: - If the integration is a RegisteredExternalService: - The ID of the RegisteredExternalService OR [ServiceProviderType]__[DeveloperName] - ServiceProviderType: Price, Inventory, Tax, or Shipment - DeveloperName of RegisteredExternalService - If the integration is a PaymentGateway: - The ID of the PaymentGateway - If the integration is a Flow:

Field	Details
	– [ServiceProviderType]__[NamespacePrefix]__[ApiName] – If NamespacePrefix is null, it's [ServiceProviderType]__[ApiName] • ServiceProviderType: Flow • ApiName and NamespacePrefix of FlowDefinitionView • If the integration is the Salesforce Standard pricing: – [ServiceProviderType]__B2B_STOREFRONT__StandardPricing • ServiceProviderType: Price
ServiceProviderType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. The type of integration service provider. Possible values are: • Flow • Inventory • Payment • Price • Promotions (this value is available in API version 53.0 and later) • Shipment • Tax
StoreId	Type reference Properties Create, Filter, Group, Sort, Update Description Required. The unique ID for the store.

StreamingChannel

Represents a channel that is the basis for notifying listeners of generic Streaming API events. This object is available in API version 29.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- This object is available only if Streaming API is enabled for your org.
- Users with the Create permission can create this record.
- You can create a permission set and grant users read and create access to all streaming channels in the org. This access isn't for a specific channel, like with user sharing.
- You can apply user sharing to StreamingChannel. You can restrict access to receiving or sending events on a channel by sharing channels with specific users or groups. Channels shared with public read-only or read-write access send events only to clients subscribed to the channel that also are using a user session associated with the set of shared users or groups. Only users with read-write access to a shared channel can generate events on the channel, or modify the actual StreamingChannel record.

Fields

Field	Details
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the StreamingChannel. Limit: 255 characters. Label: Description
IsDynamic	Type boolean Properties Defaulted on create, Filter, Group, Sort Description <code>true</code> if the channel gets dynamically created on subscribe if necessary, <code>false</code> otherwise.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last interacted with this record, directly or indirectly.
LastViewedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (<code>LastReferencedDate</code>), but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Descriptive name of the streaming channel. Limit: 80 characters, alphanumeric and “_”, “/” characters only. Must start with “/u/”. This value identifies the channel and must be unique. Label: Streaming Channel Name
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of the streaming channel. Label: Owner Name This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Dynamic Streaming Channel


Streaming API generic streaming supports dynamic streaming channel creation, which creates a `StreamingChannel` when a client first subscribes to the channel. To enable dynamic streaming channels in your org, from Setup, enter *User Interface* in the Quick Find box, then select **User Interface**. Enable **Enable Dynamic Streaming Channel Creation**. You can also enable dynamic channel creation in Metadata API using `EventSettings`.

SEE ALSO:

[Streaming API Developer Guide](#)

Salesforce Surveys Object Model

Learn about how Salesforce Surveys objects relate to one another in Salesforce.

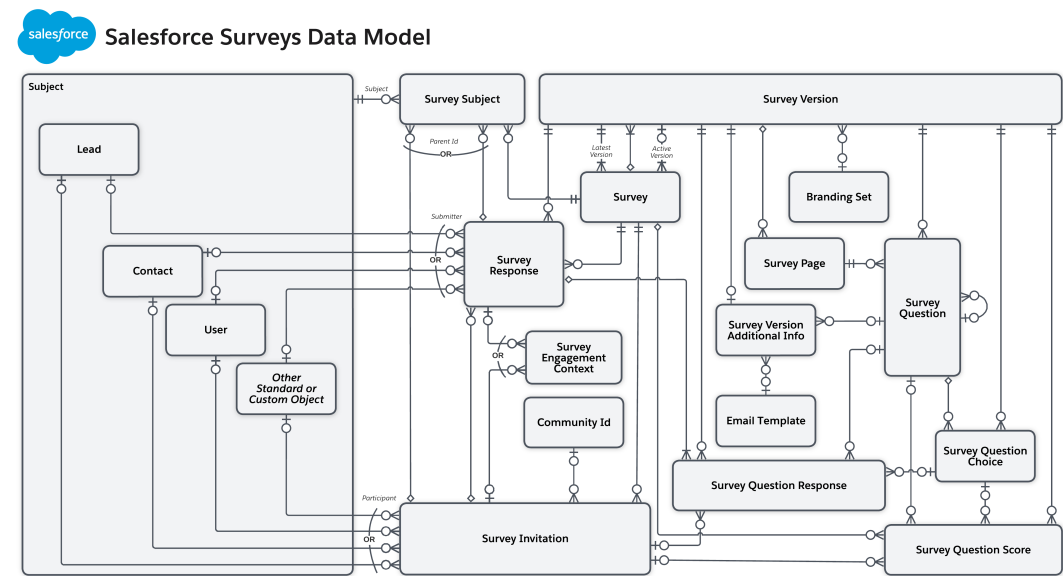

This diagram represents the object model for Salesforce Surveys. For more details and a larger image, visit the [Data Model Gallery](#).

Survey

Represents a survey.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

 **Note:** You can't define custom fields for the Survey object using the Object Manager.

Fields

Field Name	Details
ActiveVersionID	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the survey version currently activated.

Field Name	Details
Description	Type string Properties Nillable Description The description of the survey. This field isn't visible in the UI.
DeveloperName	Type string Properties Filter, Group, Sort Description The survey's unique API name.
IsPartialSaveEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether to save the partial responses for the survey (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the current user last viewed a record related to the survey.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed the survey.
LatestVersionId	Type reference Properties Filter, Group, Sort

Field Name	Details
	Description The ID of the most recent version of this survey.
Name	Type string Properties Filter, Group, Sort Description The name of the survey that appears in the UI. This field is read-only from API version 50.0.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, NamespacePrefix is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, NamespacePrefix is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the user who created the survey.
SurveyType	Type string Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description Type of the survey. The default value is Survey. Possible values are: • ASSESSMENT — Survey type for sales enablement teams. Available from API version 58.0 and later. • BASIC — Survey with a question page with like or dislike, long text, multiple selection, NPS, rating, short text, and single selection questions, and without inserted participant responses, display logic, and page branching logic. • SURVEY — Survey with all the available features.
TotalVersionsCount	Type int Properties Filter, Group, Nillable, Sort Description The number of versions of the survey.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[SurveyChangeEvent](#) on page 68

Change events are available for the object.

[SurveyFeed](#) (API version 42.0)

Feed tracking is available for the object.

[SurveyOwnerSharingRule](#)

Sharing rules are available for the object.

[SurveyShare](#)

Sharing is available for the object.

SurveyEmailBranding

Represents the configuration settings for invitation emails sent to survey participants for a particular survey.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only users with the View Setup and Configuration permission can access this object.

 **Note:** You can't define custom fields for the SurveyEmailBranding object using the Object Manager.

Fields

Field Name	Details
Body	Type textarea Properties Create, Update Description The body text of the invitation email.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique API name of the email branding configuration.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
FooterImageId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the content asset that appears in the footer of the invitation email.
FromEmailAddress	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description The email address that appears in the "From" field when the invitation is sent to participants.
HeaderImageId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The ID of the content asset that appears in the header of the invitation email.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the emails. Available languages include: • Chinese (Simplified) • Chinese (Traditional) • Danish • Dutch • English • Finnish • French • German • Italian • Japanese • Korean • Norwegian • Portuguese (Brazilian) • Russian • Spanish • Spanish (Mexican) • Swedish • Thai
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The label for these email configuration settings.
Subject	Type string Properties Create, Filter, Group, Sort, Update

Field Name	Details
	Description The subject of the invitation email.

SurveyEngagementContext

Represents the context based on which a survey invitation was sent or a survey response was received. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

 **Note:** You can't define custom fields for the SurveyEngagementContext object using the Object Manager.

Fields

Field	Details
ContextType	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Context type based on which the survey invitation was sent or the response was received.
ContextValue	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Context based on which the survey invitation was sent or the response was received.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the record.

Field	Details
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the record's owner.
SurveyInvitationId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the survey invitation.
SurveyResponseId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the survey response.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[SurveyEngagementContextShare](#)

Sharing is available for the object.

SurveyInvitation

Represents the invitation sent to a participant to complete the survey.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
CommunityId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the Experience Cloud site that you want to send the survey to.
ContactId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the contact who received the invitation. This field is available in API v49.0 and later.
EmailBrandingId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the survey email branding object that's associated with this invitation.
InvitationLink	Type url Properties Group, Nillable Description The URL to the survey that is sent to participants. To query on this field, you need access to the associated Survey record.
InviteExpiryDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time that the survey invitation expires.
IsDefault	Type boolean

Field Name	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether this is the default survey invitation to use when the survey is sent to participants.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this survey invitation.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this survey invitation.
LeadId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the lead who received the invitation. This field is available in API v49.0 and later.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the survey invitation that appears in the UI.
OptionsAllowGuestUserResponse	Type boolean Properties Create, Filter, Update

Field Name	Details
	Description Determines whether participants who don't have a Salesforce account can complete the survey.
OptionsAllowParticipantAccessTheirResponse	Type boolean Properties Create, Filter, Update Description Determines whether participants can access a copy of their responses after they complete the survey.
OptionsCollectAnonymousResponse	Type boolean Properties Create, Filter, Update Description Determines whether participants can complete the survey anonymously.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the user who created the survey invitation.
ParticipantId	Type reference Properties Create, Filter, Group, Nillable, Sort Description ID of the participant if the participant is a Salesforce contact, user, or lead.
ResponseStatus	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The status of a participant's response to the survey that's associated with the survey invitation. Possible values include: NotStarted — For an invitation with a ParticipantID, it means that the recipient hasn't opened the survey. For an invitation without the

Field Name	Details
	<code>ParticipantID</code>, it means that none of the recipients have opened the survey. • Started — For an invitation with a <code>ParticipantID</code>, it means that the recipient opened the survey. For an invitation without the <code>ParticipantID</code>, it means that the survey has been opened by at least one recipient. • Paused — For an invitation with a <code>ParticipantID</code>, it means that the recipient has paused the survey. For an invitation without the <code>ParticipantID</code>, it means that the survey has been paused by any one of the recipients. <code>Paused</code> isn't available for invitations in which either <code>OptionsAllowParticipantAccessTheirResponse</code> or <code>OptionsCollectAnonymousResponse</code> is true. • PartiallyCompleted — For an invitation with a <code>ParticipantID</code> field, it means that the recipient has partially completed the survey. For an invitation without the <code>ParticipantID</code> field, it means that at least one recipient has partially completed the survey. Available in API version 63.0 and later. • Completed — For an invitation with a <code>ParticipantID</code>, it means that the recipient has submitted the survey. For an invitation without the <code>ParticipantID</code>, it means that the invitation has been submitted by at least one recipient.
SurveyId	Type reference Properties Create, Filter, Group, Sort Description ID of the survey that's sent in the invitation.
UUID	Type string Properties Filter, Group, Nillable, Sort Description A unique user ID that's added to a survey invitation generated for a contact, lead, or user.
UserId	Type reference Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description ID of the user who received the invitation. This field is available in API v49.0 and later.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[SurveyInvitationChangeEvent](#) (API version 62.0)

Change events are available for the object.

[SurveyInvitationOwnerSharingRule](#)

Sharing rules are available for the object.

[SurveyInvitationShare](#)

Sharing is available for the object.

SurveyPage

Represents a page, such as the title page or a question page, in a survey.

Supported Calls

`getDeleted()`, `getUpdated()`, `query()`, `retrieve()`



Note: You can't define custom fields for the SurveyPage object using the Object Manager.

Fields

Field	Details
DeveloperName	Type string Properties Filter, Group, Sort Description The unique API name of this SurveyPage object.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the survey page that appears in the UI.

Field	Details
SurveyVersionId	Type reference Properties Filter, Group, Sort Description The version of the survey that the page belongs to.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[SurveyPageChangeEvent](#) on page 68

Change events are available for the object.

SurveyQuestion

Represents a question in a survey.

Supported Calls

`describeLayout()` `describeSObjects()` `getDeleted()` `getUpdated()` `query()` `retrieve()`



Note: You can't define custom fields for the SurveyQuestion object using the Object Manager.

Fields

Field	Details
DeveloperName	Type string Properties Filter, Group, Sort Description The API name of the SurveyQuestion. The API name must be unique within a particular version of the survey.
IsDeprecated	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Indicates whether the question was deleted from the survey.
Name	Type string Properties Filter, Group, idLookup, Sort Description Up to the first 250 characters of the label for the question.
PageDisplayOrder	Type int Properties Filter, Group, Nillable, Sort Description The order in which the page is displayed. This field is available in API version 54.0 and later.
PageName	Type string Properties Filter, Group, Nillable, Sort Description The label for the page. This field is available in API version 52.0 and later.
QuestionChoiceCount	Type int Properties Filter, Group, Nillable, Sort Description The number of choices for the question. This field is available in API version 62.0 and later.
QuestionName	Type textarea Properties Nillable Description The label for the question.
QuestionOrder	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The order in which the question is displayed. The label for the page. This field is available in API version 52.0 and later.
QuestionType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of question. Possible values include: • Boolean—This value is available in API v49.0 and later. • CSAT • Currency • Date • DateTime • FreeText • Image • Matrix—This value is available in API v55.0 and later. • MultipleChoice • MultiSelectPicklist • NPS • Number • Picklist • RadioButton • StackRank • Rating • ShortText—This value is available in API v49.0 and later. • Slider • Toggle
RelatedQuestionId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the parent question. This field is blank when the question itself is the parent question. This field is available in API v55.0 and later, with Feedback Management - Starter and Feedback Management - Growth licenses.

Field	Details
SubQuestionDisplayOrder	Type int Properties Filter, Group, Nillable, Sort Description The order in which the question is displayed within the parent question. This field is available in API v55.0 and later, with Feedback Management - Starter and Feedback Management - Growth licenses.
SurveyPageId	Type reference Properties Filter, Group, Sort Description Lookup to the SurveyPage that contains the question.
SurveyVersionId	Type reference Properties Filter, Group, Sort Description The ID of the SurveyVersion that the question belongs to.
ValidationType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The validations available for the short-text question. Possible values include: • Custom - Cu • Number - Nu

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[SurveyQuestionChangeEvent](#) on page 68

Change events are available for the object.

SurveyQuestionChoice

Represents an answer choice that a participant can select for a survey question.

Supported Calls

`describeLayout()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`



Note: You can't define custom fields for the SurveyQuestionChoice object using the Object Manager.

Fields

Field	Details
DeveloperName	Type string Properties Filter, Group, Sort Description The unique API name of the SurveyQuestionChoice object.
DisplayOrder	Type int Properties Filter, Group, Nillable, Sort Description The order in which the question choice is displayed within the parent question. This field is available in API v55.0 and later, with Feedback Management - Starter and Feedback Management - Growth licenses.
IsDeprecated	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a question choice was deleted from the survey.
Name	Type string Properties Filter, Group, idLookup, Sort Description A label for the question choice that appears in the UI.

Field	Details
QuestionId	Type reference Properties Filter, Group, Sort Description The ID of the SurveyQuestion object that this choice belongs to.
SurveyVersionId	Type reference Properties Filter, Group, Nillable, Sort Description The version of the survey that this question choice belongs to.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[SurveyQuestionChoiceChangeEvent](#) on page 68

Change events are available for the object.

SurveyQuestionResponse

Represents a participant's answer to a specific question.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`



Note: You can't define custom fields for the SurveyQuestionResponse object using the Object Manager.

Fields

Field	Details
ChoiceValue	Type textarea Properties Filter, Nillable, Sort Description Response provided by a participant for the following question types:

Field	Details
	• Multiple choice • Picklist • Radio • Ranking
Datatype	Type Properties Filter, Group, Nillable, Restricted picklist, Sort Description The data type of the question response. Possible values are: • Boolean This value is available in API v49.0 and later. • Date • Double • Int • Number • String
DateTimeValue	Type dateTime Properties Filter, Nillable, Sort Description Response provided by a participant for a question of the type date time.
DateValue	Type date Properties Filter, Group, Nillable, Sort Description Response provided by a participant for a question of the type date.
InvitationId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the SurveyInvitation that was sent to the survey participant.
IsTrueOrFalse	Type boolean

Field	Details
	Properties Defaulted on create, Filter, Group, Sort Description Response provided by a participant for a question type which has only two possible values: True and False.
NumberValue	Type int Properties Filter, Group, Nillable, Sort Description Response provided by a participant for the following question types: • Net Promoter Score (NPS) • Rating • Score • Slider
QuestionChoiceId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of SurveyQuestionChoice that a participant chose in response to a question.
QuestionId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the SurveyQuestion that a participant provided an answer for.
Rank	Type int Properties Filter, Group, Nillable, Sort Description Rank provided by a participant for an answer choice for the ranking question type.
ResponseId	Type reference

Field	Details
	Properties Filter, Group, Sort Description The ID of the SurveyResponse that is the parent of this SurveyQuestionResponse.
ResponseShortText	Type string Properties Filter, Group, idLookup, Sort Description Up to the first 250 characters of the response provided by a participant for a text type question.
ResponseValue	Type textarea Properties Nillable Description Response provided by a participant for a question.
SurveyVersionId	Type reference Properties Filter, Group, Sort Description The ID of the SurveyVersion that the response belongs to.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[SurveyQuestionResponseChangeEvent](#) on page 68

Change events are available for the object.

SurveyQuestionScore

Represents the aggregate of responses for the following question types: date, multiple choice, picklist, radio, ranking, rating, scoring, slider, and [Net Promoter Score® \(NPS®\)](#).

Supported Calls

`delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`

 **Note:** You can't define custom fields for the SurveyQuestionScore object using the Object Manager.

Fields

Field	Details
CumulativeScore	Type double Properties Filter, Nillable, Sort Description Sum of the responses provided by all the participants for a question of the following types: rating, scoring, and slider. For a question of the type ranking, sum of the weights provided by all the participants for each item.  Note: This field is only applicable for the overall score type.
DateResponse	Type date Properties Filter, Group, Nillable, Sort Description The date selected by one or more participants for a question of the type date.  Note: This field is only applicable for the individual score type.
Name	Type string Properties Filter, Group, idLookup, Sort Description For an overall score type record: - Name of a question. - Name of an item in a question of the type ranking. For an individual score type record: - Name of an item in a question of the type ranking. - Name of a question of the type date. - Response provided by one or more participants for questions of the following types: picklist, multiple choice, rating, ranking, score, slider, NPS.
QuestionChoiceId	Type reference

Field	Details
	Properties Filter, Group, Nillable, Sort Description Unique identifier of the answer choice selected by one or more participants. For an individual score type record, this field is applicable for questions of the following types: picklist, radio, multi choice, ranking and rating. For an overall score type record, this field is applicable for questions of the type ranking.
QuestionDeveloperName	Type string Properties Filter, Group, Nillable, Sort Description The API name of the question for which response is recorded. The API name must be unique within a particular version of the survey.
QuestionId	Type reference Properties Filter, Group, Nillable, Sort Description Unique identifier of the question for which response is recorded.
QuestionName	Type textarea Properties Nillable Description Name of the question for which response is recorded.
QuestionSkippedCount	Type int Properties Filter, Group, Nillable, Sort Description Number of participants who didn't respond to the question.  Note: This field is only applicable for the overall score type.
ResponseCount	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description For an overall score type record, number of participants who responded to the question. For an individual score type record, number of participants who selected a particular answer choice.
ResponseValue	Type double Properties Filter, Nillable, Sort Description Answer choice selected by one or more participants for a question of the following types: rating, slider, score, NPS. Rank provided by the participant for an item in a question of the type ranking.  Note: This field is only applicable for the individual score type.
Score	Type double Properties Filter, Nillable, Sort Description For an individual score type record, percentage of participants who selected a particular answer choice.  Note: For questions of the type ranking, the percentage of participants who have provided the same rank to an item. For overall score type record: • Average score of questions of the following question types: rating, scoring, and slider. • Score of an NPS type question. • Average weight provided by all participants for each item in question of the type ranking. • Number of participants who responded to the question for the following question types: date, radio, multi choice, and picklist.
ScoreType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Type of the score calculated for a record. Possible values are: • Individual

Field	Details
	Overall
SurveyId	Type reference Properties Filter, Group, Sort Description Unique identifier of the survey that contains the question for which scores are calculated.
SurveyInvitationId	Type reference Properties Filter, Group, Nillable, Sort Description Unique identifier of the survey invitation for which scores are calculated.
SurveyVersionId	Type reference Properties Filter, Group, Sort Description Unique identifier of the survey version for which scores are calculated.

SurveyResponse

Represents information about a participant's response to a survey, such as the status of the response, the participant's location, and when the survey was completed.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`



Note: You can't define custom fields for the SurveyResponse object using the Object Manager.

Fields

Field Name	Details
CompletionDateTime	Type dateTime

Field Name	Details
	Properties Filter, Nillable, Sort Description The date and time that the participant completed the survey.
DataManagerExecutionStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Status of all the survey data maps after a response is received. This field is available in API v49.0 and later, with Feedback Management - Starter and Feedback Management - Growth licenses. Possible values are: • Pending • InProgress • Success • Error
InterviewGuid	Type string Properties Filter, Group, idLookup, Nillable Description An automatically-generated, unique ID for a saved survey response.
InterviewId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the FlowInterview object that's associated with this response.
InvitationId	Type reference Properties Filter, Group, Sort Description The ID of the SurveyInvitation object that's associated with this response.

Field Name	Details
IpAddress	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the device the participant used to take the survey.
Language	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The language that the participant used to complete the survey. Possible values are: • af—Afrikaans • ar—Arabic • ar_AE—Arabic (United Arab Emirates) • ar_BH—Arabic (Bahrain) • ar_DZ—Arabic (Algeria) • ar_EG—Arabic (Egypt) • ar_IQ—Arabic (Iraq) • ar_JO—Arabic (Jordan) • ar_KW—Arabic (Kuwait) • ar_LB—Arabic (Lebanon) • ar_LY—Arabic (Libya) • ar_MA—Arabic (Morocco) • ar_OM—Arabic (Oman) • ar_QA—Arabic (Qatar) • ar_SA—Arabic (Saudi Arabia) • ar_SD—Arabic (Sudan) • ar_SY—Arabic (Syria) • ar_TN—Arabic (Tunisia) • ar_YE—Arabic (Yemen) • bg—Bulgarian • bn—Bengali • bs—Bosnian • ca—Catalan • cs—Czech • cy—Welsh

Field Name

Details

-
- da—Danish
 - de—German
 - de_AT—German (Austria)
 - de_BE—German (Belgium)
 - de_CH—German (Switzerland)
 - de_LU—German (Luxembourg)
 - el—Greek
 - en_AU—English (Australian)
 - en_CA—English (Canadian)
 - en_GB—English (UK)
 - en_HK—English (Hong Kong)
 - en_IE—English (Ireland)
 - en_IN—English (Indian)
 - en_MY—English (Malaysian)
 - en_NZ—English (New Zealand)
 - en_PH—English (Philippines)
 - en_SG—English (Singapore)
 - en_US—English
 - en_ZA—English (South Africa)
 - es—Spanish
 - es_AR—Spanish (Argentina)
 - es_BO—Spanish (Bolivia)
 - es_CL—Spanish (Chile)
 - es_CO—Spanish (Colombia)
 - es_CR—Spanish (Costa Rica)
 - es_DO—Spanish (Dominican Republic)
 - es_EC—Spanish (Ecuador)
 - es_GT—Spanish (Guatemala)
 - es_HN—Spanish (Honduras)
 - es_MX—Spanish (Mexico)
 - es_NI—Spanish (Nicaragua)
 - es_PA—Spanish (Panama)
 - es_PE—Spanish (Peru)
 - es_PR—Spanish (Puerto Rico)
 - es_PY—Spanish (Paraguay)
 - es_SV—Spanish (El Salvador)
 - es_US—Spanish (United States)
 - es_UY—Spanish (Uruguay)
-

Field Name

Details

- es_VE—Spanish (Venezuela)
- et—Estonian
- eu—Basque
- fa—Farsi
- fi—Finnish
- fr—French
- fr_BE—French (Belgium)
- fr_CA—French (Canadian)
- fr_CH—French (Switzerland)
- fr_LU—French (Luxembourg)
- ga—Irish
- gu—Gujarati
- hi—Hindi
- hr—Croatian
- hu—Hungarian
- hy—Armenian
- in—Indonesian
- is—Icelandic
- it—Italian
- it_CH—Italian (Switzerland)
- iw—Hebrew
- ja—Japanese
- ka—Georgian
- kn—Kannada
- ko—Korean
- lb—Luxembourgish
- lt—Lithuanian
- lv—Latvian
- mi—Te reo
- mk—Macedonian
- ml—Malayalam
- mr—Marathi
- ms—Malay
- mt—Maltese
- my—Burmese
- nl_BE—Dutch (Belgium)
- nl_NL—Dutch
- no—Norwegian

Field Name	Details
	• pl—Polish • pt_BR—Portuguese (Brazil) • pt_PT—Portuguese (European) • rm—Romansh • ro—Romanian • ro_MD—Romanian (Moldova) • ru—Russian • sh—Serbian (Latin) • sh_ME—Montenegrin • sk—Slovak • sl—Slovene • sq—Albanian • sr—Serbian (Cyrillic) • sv—Swedish • sw—Swahili • ta—Tamil • te—Telugu • th—Thai • tl—Tagalog • tr—Turkish • uk—Ukrainian • ur—Urdu • vi—Vietnamese • xh—Xhosa • zh_CN—Chinese (Simplified) • zh_HK—Chinese (Hong Kong) • zh_SG—Chinese (Singapore) • zh_TW—Chinese (Traditional) • zu—Zulu
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that another Salesforce object last referenced this SurveyResponse object.

Field Name	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that someone last viewed this SurveyResponse object.
Latitude	Type double Properties Filter, Nillable, Sort Description The latitude of the participant's location.
Location	Type location Properties Nillable Description The latitude and longitude coordinates of the participant's location.
Longitude	Type double Properties Filter, Nillable, Sort Description The longitude of the participant's location.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the participant.
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The status of the survey. Possible values include:

Field Name	Details
	• NotStarted — The participant hasn't opened the survey. • Started — The participant has opened the survey. • Paused — The participant has paused the survey. Paused isn't available for invitations in which either <code>OptionsAllowParticipantAccessTheirResponse</code> or <code>OptionsCollectAnonymousResponse</code> is true. • PartiallyCompleted — The participant has partially completed the survey. Available in API version 63.0 and later. • Completed — The participant has completed the survey.
SubmitterId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the Salesforce user, contact, or lead who completed the survey. Relationship Name Submitter Relationship Type Lookup Refers To Contact, Lead, User
SurveyId	Type reference Properties Filter, Group, Sort Description The ID of the survey that the participant completed.
SurveyVersionId	Type reference Properties Filter, Group, Sort Description The ID of the version of the survey that the participant completed.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

SurveyResponseChangeEvent on page 68

Change events are available for the object.

SurveySubject

Represents a relationship between a survey and another object, such as an account or a case.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the SurveySubject record was last referenced by another object.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed the SurveySubject record.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the SurveySubject record.
ParentId	Type reference Properties Create, Filter, Group, Sort

Field Name	Details
	Description Unique identifier of the SurveyInvitation object or SurveyResponse object that is associated with this survey-object relationship. Relationship Name Parent Relationship Type Lookup Refers To SurveyInvitation, SurveyResponse
SubjectEntityType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Object that the survey is associated with. Possible values include: • <i>Account</i> • <i>Asset</i> • <i>Banker</i> • <i>BranchUnit</i> • <i>BranchUnitBusinessMember</i> • <i>BranchUnitCustomer</i> • <i>BusinessLicenseApplication</i> • <i>BusinessMilestone</i> • <i>Campaign</i> • <i>CareProgram</i> • <i>Case</i> • <i>Claim</i> • <i>ClaimParticipant</i> • <i>Contact</i> • <i>Employee</i> • <i>Event</i> • <i>Incident</i> • <i>IndividualApplication</i> • <i>InsurancePolicy</i> • <i>InsurancePolicyParticipant</i> • <i>Lead</i> • <i>LearningItemSubmission</i>—Available in API version 58.0 and later. • <i>LiveChatTranscript</i>

Field Name	Details
	<i>LoyaltyProgram</i> <i>LoyaltyProgramMember</i> <i>LoyaltyProgramPartner</i> <i>MaterialityStakeholder</i> <i>MessagingSession</i> <i>Opportunity</i> <i>Order</i> <i>PersonalLifeEvent</i> <i>Producer</i> <i>Product2</i> <i>Promotion</i> <i>RebateProgram</i> <i>RetailStore</i> <i>ServiceAppointment</i> <i>ServiceResource</i> <i>Solution</i> <i>Task</i> <i>TransactionJournal</i> <i>User</i> <i>VideoCall</i> <i>Visit</i> <i>VoiceCall</i> <i>VolunteerProject</i> <i>WorkOrder</i> - Custom Objects
SubjectId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the object that's associated with the survey.
SurveyId	Type reference Properties Filter, Group, Sort

Field Name	Details
	Description Unique identifier of the survey that's associated with the record that's represented by SubjectId.
SurveyInvitationId	Type reference Properties Filter, Group, Nillable, Sort Description Unique identifier of the survey invitation that's associated with another object.
SurveyResponseId	Type reference Properties Filter, Group, Nillable, Sort Description Unique identifier of the survey response that's associated with another object.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[SurveySubjectChangeEvent](#) (API version 62.0)

Change events are available for the object.

SurveyVersion

Represents a version of a survey.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`



Note: You can't define custom fields for the SurveyVersion object using the Object Manager.

Fields

Field Name	Details
BrandingSetId	Type reference

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description The ID of the branding set associated with the survey version.
Description	Type textarea Properties Nillable Description The description of this survey version.
IsTemplate	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the survey version is a template. Template surveys are automatically shared with all users in your Salesforce org.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the current user last viewed a record related to the survey version.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed the survey version.
Name	Type string Properties Filter, Group, Sort Filter, Group, Sort Filter, Group, idLookup, Sort

Field Name	Details
	Description The name of the survey that appears in the UI.
SurveyId	Type reference Properties Filter, Group, Sort Description The ID of the survey associated with the survey version.
SurveyStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The status of the survey. Possible values include: • Active • Draft • Obsolete • InvalidDraft
VersionNumber	Type int Properties Filter, Group, Sort Description The version number of the survey.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[SurveyVersionChangeEvent](#) on page 68

Change events are available for the object.

SurveyVersionAddlInfo

Represents additional information about a survey version. This information defines the default settings of a survey version. This object is available in API version 49.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field	Details
EmailSender	Type textarea Properties Filter, Nillable, Sort Description The organization-wide email address used to send a survey invitation.
EmailTemplateId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the email template that's used to send an automated survey invitation.
EngagementContextMetadata	Type string Properties Filter, Group, Nillable, Sort Description The custom metadata created to get the engagement context from the participants.
InvitationSharingRole	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Indicates the users that share edit access to a survey invitation. Possible values are: • <code>InvitationRecordCreator</code>— Owner of the record that's associated with a survey invitation. • <code>SurveyOwner</code>
Language	Type picklist

Field**Details****Properties**

Filter, Group, Nillable, Restricted picklist, Sort

Description

Language used to create the survey.

Possible values are:

- af—Afrikaans
- ar—Arabic
- ar_AE—Arabic (United Arab Emirates)
- ar_BH—Arabic (Bahrain)
- ar_DZ—Arabic (Algeria)
- ar_EG—Arabic (Egypt)
- ar_IQ—Arabic (Iraq)
- ar_JO—Arabic (Jordan)
- ar_KW—Arabic (Kuwait)
- ar_LB—Arabic (Lebanon)
- ar_LY—Arabic (Libya)
- ar_MA—Arabic (Morocco)
- ar_OM—Arabic (Oman)
- ar_QA—Arabic (Qatar)
- ar_SA—Arabic (Saudi Arabia)
- ar_SD—Arabic (Sudan)
- ar_SY—Arabic (Syria)
- ar_TN—Arabic (Tunisia)
- ar_YE—Arabic (Yemen)
- bg—Bulgarian
- bn—Bengali
- bs—Bosnian
- ca—Catalan
- cs—Czech
- cy—Welsh
- da—Danish
- de—German
- de_AT—German (Austria)
- de_BE—German (Belgium)
- de_CH—German (Switzerland)
- de_LU—German (Luxembourg)
- el—Greek
- en_AU—English (Australian)

Field	Details
	• en_CA—English (Canadian) • en_GB—English (UK) • en_HK—English (Hong Kong) • en_IE—English (Ireland) • en_IN—English (Indian) • en_MY—English (Malaysian) • en_NZ—English (New Zealand) • en_PH—English (Philippines) • en_SG—English (Singapore) • en_US—English • en_ZA—English (South Africa) • es—Spanish • es_AR—Spanish (Argentina) • es_BO—Spanish (Bolivia) • es_CL—Spanish (Chile) • es_CO—Spanish (Colombia) • es_CR—Spanish (Costa Rica) • es_DO—Spanish (Dominican Republic) • es_EC—Spanish (Ecuador) • es_GT—Spanish (Guatemala) • es_HN—Spanish (Honduras) • es_MX—Spanish (Mexico) • es_NI—Spanish (Nicaragua) • es_PA—Spanish (Panama) • es_PE—Spanish (Peru) • es_PR—Spanish (Puerto Rico) • es_PY—Spanish (Paraguay) • es_SV—Spanish (El Salvador) • es_US—Spanish (United States) • es_UY—Spanish (Uruguay) • es_VE—Spanish (Venezuela) • et—Estonian • eu—Basque • fa—Farsi • fi—Finnish • fr—French • fr_BE—French (Belgium) • fr_CA—French (Canadian)

Field	Details
	• fr_CH—French (Switzerland) • fr_LU—French (Luxembourg) • ga—Irish • gu—Gujarati • hi—Hindi • hr—Croatian • hu—Hungarian • hy—Armenian • in—Indonesian • is—Icelandic • it—Italian • it_CH—Italian (Switzerland) • iw—Hebrew • ja—Japanese • ka—Georgian • kn—Kannada • ko—Korean • lb—Luxembourgish • lt—Lithuanian • lv—Latvian • mi—Te reo • mk—Macedonian • ml—Malayalam • mr—Marathi • ms—Malay • mt—Maltese • my—Burmese • nl_BE—Dutch (Belgium) • nl_NL—Dutch • no—Norwegian • pl—Polish • pt_BR—Portuguese (Brazil) • pt_PT—Portuguese (European) • rm—Romansh • ro—Romanian • ro_MD—Romanian (Moldova) • ru—Russian • sh—Serbian (Latin)

Field	Details
	- sh_ME—Montenegrin - sk—Slovak - sl—Slovene - sq—Albanian - sr—Serbian (Cyrillic) - sv—Swedish - sw—Swahili - ta—Tamil - te—Telugu - th—Thai - tl—Tagalog - tr—Turkish - uk—Ukrainian - ur—Urdu - vi—Vietnamese - xh—Xhosa - zh_CN—Chinese (Simplified) - zh_HK—Chinese (Hong Kong) - zh_SG—Chinese (Singapore) - zh_TW—Chinese (Traditional) - zu—Zulu
Name	Type string Properties Filter, Group, idLookup, Sort Description Name of the record.
SurveyQuestionId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the survey question embedded in the email template used to send automated survey invitations.
SurveyVersionId	Type reference

Field	Details
	Properties Filter, Group, Sort
	Description ID of the survey version. This field is unique within your organization

SvcCatalogCategory

Represents a group of Service Catalog items by functional area. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, get the Service Catalog Access permission set license, Employee Productivity Starter license, or Employee Productivity Plus add-on license.

Fields

Field	Details
DeveloperName	Type string
	Properties Create, Filter, Group, Sort, Update
	Description Unique developer name for the catalog item category.
ImageId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Allows a builder to pick an image displayed in the catalog. This field is a relationship field.
	Relationship Name Image
	Relationship Type Lookup

Field	Details
	Refers To ContentAsset
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Allows service catalog builders to deprecate categories or create in-draft categories. The default value is <code>false</code> .
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Possible values are: • <code>da</code>—Danish • <code>de</code>—German • <code>en_US</code>—English • <code>es</code>—Spanish • <code>es_MX</code>—Spanish (Mexico) • <code>fi</code>—Finnish • <code>fr</code>—French • <code>it</code>—Italian • <code>ja</code>—Japanese • <code>ko</code>—Korean • <code>nl_NL</code>—Dutch • <code>no</code>—Norwegian • <code>pt_BR</code>—Portuguese (Brazil) • <code>ru</code>—Russian • <code>sv</code>—Swedish • <code>th</code>—Thai • <code>zh_CN</code>—Chinese (Simplified) • <code>zh_TW</code>—Chinese (Traditional)
ParentCategoryId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Parent category of this category. Allows categories to be grouped up to a max depth of 3. This field is a relationship field.
	Relationship Name ParentCategory
	Relationship Type Lookup
	Refers To SvcCatalogCategory
SortOrder	Type int
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Determines the order that the category is displayed to the end user.

SvcCatalogCategoryItem

Represents an association between a Service Catalog item and category. Service catalog items can be grouped into categories. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, get the Service Catalog Access permission set license, Employee Productivity Starter license, or Employee Productivity Plus add-on license.

Fields

Field	Details
IsPrimaryCategory	Type boolean

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Specifies whether the category is the primary category for a catalog item. The default value is <code>false</code>.
SortOrder	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Controls the order in which catalog items appear by default when you're viewing all items in a single category.
SvcCatalogCategoryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the category for which the service category item belongs. This field is a relationship field. Relationship Name SvcCatalogCategory Relationship Type Lookup Refers To SvcCatalogCategory
SvcCatalogItemDefId	Type reference Properties Create, Filter, Group, Sort Description ID of the service category item definition. This field is a relationship field. Relationship Name SvcCatalogItemDef Relationship Type Lookup Refers To SvcCatalogItemDef

SvcCatalogFilterCriteria

Represents an eligibility rule that determines if a Service Catalog user has access to a catalog item. This object is available in API version 60.0 and later.

Supported SOAP API Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Supported REST API Methods

`DELETE`, `GET`, `HEAD`, `PATCH`, `POST`, `Query`

Special Access Rules

To access this object, get the Service Catalog Access permission set license.

Fields

Field	Details
CriteriaRelation	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Possible values are: • AllConditionsAreMet • AnyConditionIsMet
Description	Type textarea Properties Nillable Description A description that states the restriction placed on a user's access to a catalog items eligibility.
DeveloperName	Type string Properties Filter, Group, Sort Description The unique name of the object in the API. The name:

Field	Details
	• must be 40 characters or fewer • must begin with a letter • can contain only underscores and alphanumeric characters • can't include spaces • can't end with an underscore • can't contain 2 consecutive underscores In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.
FullName	Type string Properties Create, Group, Nillable
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Specifies if the eligibility rule is active. The default value is <code>false</code>.
Language	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description Supported languages for eligibility rules Possible values are: • <code>da</code>—Danish • <code>de</code>—German • <code>en_US</code>—English • <code>es</code>—Spanish • <code>es_MX</code>—Spanish (Mexico) • <code>fi</code>—Finnish • <code>fr</code>—French • <code>it</code>—Italian • <code>ja</code>—Japanese • <code>ko</code>—Korean

Field	Details
	- nl_NL—Dutch - no—Norwegian - pt_BR—Portuguese (Brazil) - ru—Russian - sv—Swedish - th—Thai - zh_CN—Chinese (Simplified) - zh_TW—Chinese (Traditional)
ManageableState	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Describes the manageable state of a catalog item that is contained in a package. Possible values are: - beta—Managed-Beta - deleted—Managed-Proposed-Deleted - deprecated—Managed-Proposed-Deprecated - deprecatedEditable—SecondGen-Installed-Deprecated - installed—Managed-Installed - installedEditable—SecondGen-Installed-Editable - released—Managed-Released - unmanaged—Unmanaged
MasterLabel	Type string Properties Filter, Group, Sort Description The label of the eligibility rule record.
Metadata	Type complexvalue Properties Create, Nillable, Update Description The metadata type associated with the SvcCatalogFilterCriteria object.

Field	Details
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort
NumOfRelatedItems	Type int Properties Filter, Group, Nillable, Sort Description The number of catalog items that has the eligibility rule.

SvcCatalogItemDef

Represents a service catalog item that can be requested by a service catalog user. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

To access this object, get the Service Catalog Access permission set license, Employee Productivity Starter license, or Employee Productivity Plus add-on license.

Fields

Field	Details
Description	Type textarea Properties Create, Nillable, Update Description The definition of the catalog item. This field is visible on the Service Catalog page.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update

Field	Details
	Description The unique developer name for the catalog item.
FlowName	Type string Properties Filter, Group, Nillable, Sort Description The flow called when the user navigates to the request page for the catalog item. Available in API version 55.0 and later.
FulfillmentFlowId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the fulfillment flow. Available in API version 56.0 and later. This field is a relationship field. Relationship Name FulfillmentFlow Relationship Type Lookup Refers To SvcCatalogFulfillmentFlow
ImageId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The image ID used for the catalog item. This field is a relationship field. Relationship Name Image Relationship Type Lookup Refers To ContentAsset
ImageReference	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description Derived field from <code>ImageId</code> to expose <code>ContentAssetId</code> on item definitions. Available in API version 61.0 and later.
<code>InternalNotes</code>	Type textarea Properties Create, Nillable, Update Description A place for the Service Catalog Builder to leave internal notes about the catalog item.
<code>IsActive</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Derived field from <code>Status</code> to indicate whether the service catalog item is active. The default value is <code>false</code>. Available in API version 59.0 and later.
<code>IsAvailableToAllCustomers</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the Service Catalog item is available to all customers. The default value is <code>false</code>. Available in API version 61.0 and later.
<code>IsFeatured</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Specifies whether a catalog item is marked as a favorite for the org. Favorites display as a featured item on the Service Catalog home page. The default value is <code>false</code>.

Field	Details
IsGuestAccessible	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the Service Catalog item can be accessed by guest users. The default value is <code>false</code>. Available in API version 61.0 and later.
IsOutOfSync	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the fulfillment flow that the Service Catalog item is based on has been updated. Available in API version 58.0 and later. The default value is <code>false</code>. If value is <code>true</code>, try updating and saving the service catalog item again.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Supported languages for catalog items.
Product	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description The product associated with the Service Catalog item. The value is derived from <code>UsageType</code>. Available in API version 59.0 and later. Possible values are: • <code>FinancialServices</code> • <code>ServiceCatalog—Default</code>
ShortDescription	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The short description of the catalog item.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Allows the Service Catalog Builder to control whether the flow is displayed to users within the Service Catalog. Possible values are: • <code>Deprecated</code> • <code>Draft—Default</code> • <code>PendingChanges</code> • <code>Published</code>
UsageType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The business type for which the Service Catalog is used. Available in API version 57.0 and later. Possible values are: • <code>CustomerService</code> • <code>Employee—Default</code> • <code>FinancialServices</code> • <code>Industry</code>

SvcCatalogRequest

Represents a request made by a user using the Service Catalog. Catalog builders use this object to report on Service Catalog activity. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access this object, get the Service Catalog Access permission set license, Employee Productivity Starter license, or Employee Productivity Plus add-on license.

Fields

Field	Details
CatalogItemDescription	Type textarea Properties Create, Nillable, Update Description Description for the catalog item.
CatalogItemName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Name of the catalog item.
CatalogItemVersion	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Version for the catalog item. This is a calculated field. Available in API version 58.0 and later.
ClosedDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time when the request was closed. This field is automatically populated when <code>IsClosed</code> is 'true'.
CurrencyIsoCode	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description ISO code of the currency. Must be one of the valid alphabetic, three-letter currency ISO codes defined by the ISO 4217 standard, such as USD, GBP, or JPY. Must be unique within your organization. Default value is <code>USD</code>-U.S. Dollar.
FlowInterviewGuid	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Unique GUID associated with the automation that was executed as part of the catalog item. Available in API version 60.0 and later.
IsClosed	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the request has been resolved. This field is automatically checked when <code>ClosedDate</code> is populated. The default value is <code>false</code>.
ItemFlowVersion	Type string Properties Filter, Group, Nillable, Sort Description Version for the item flow. This is a calculated field.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The Service Catalog request number.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID for the owner record. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
Status	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The status of the service catalog request. Available in API version 60.0 and later. Possible values are: - CompletedExecution—Default - CreatedRequest - StartedExecution
SubmitterId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description ID for the submitter record. This is a relationship field. Relationship Name Submitter Relationship Type Lookup Refers To User
SvcCatalogItemDefinitionId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The catalog item that was used to create this request. This is a relationship field. Relationship Name SvcCatalogItemDefinition Relationship Type Lookup Refers To SvcCatalogItemDef
TargetCustomerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The customer ID that the request was submitted for. For example, when an agent runs a catalog item for a given contact, the contact is represented by the <code>TargetCustomerId</code>. Available in API version 61.0 and later. This is a polymorphic relationship field. Relationship Name TargetCustomer Relationship Type Lookup Refers To Contact, User

SvcCatalogReqRelatedItem

Represents an item related to a Service Catalog Request. This object is available in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access this object, get the Service Catalog permission set license, Employee Productivity Starter license, or Employee Productivity Plus add-on license.

Fields

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the related item.
RelatedExternalId	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Text containing an ID from any external system.
RelatedInternalRecordId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The Salesforce record related to this request. This reference must be for an object that has the following characteristics. • It's a standard object. • It must allow custom fields. • It's referencable (that is, it can be the target of a lookup). • It can be the target of a custom lookup field.

Field	Details
	- It contains a Name field. - It isn't dependent on a junction object. - It isn't a virtual object or a setup object. This is a polymorphic relationship field. Relationship Name RelatedInternalRecord Relationship Type Lookup Refers To Account, Address, Asset, AssociatedLocation, AuthorizationForm, AuthorizationFormConsent, AuthorizationFormDataUse, AuthorizationFormText, BusinessBrand, Case, CommSubscription, CommSubscriptionChannelType, CommSubscriptionConsent, CommSubscriptionTiming, Contact, ContactPointAddress, ContactPointConsent, ContactPointEmail, ContactPointPhone, ContactPointTypeConsent, Contract, ContractLineItem, Customer, DataUseLegalBasis, DataUsePurpose, Employee, EngagementChannelType, Entitlement, Idea, Individual, InternalOrganizationUnit, Lead, Location, MessagingEndUser, Opportunity, Order, OrderItem, PartyConsent, Pricebook2, ProcessException, Product2, ProfileSkill, ProfileSkillEndorsement, ProfileSkillUser, QuickText, Recommendation, Seller, ServiceContract, SocialPersona, SocialPost, Solution, SurveyInvitation, SurveySubject, UserProvisioningRequest, VoiceCall
SvcCatalogRequestId	Type reference Properties Create, Filter, Group, Sort Description The SvcCatalogRequest record. This is a relationship field. Relationship Name SvcCatalogRequest Relationship Type Lookup Refers To SvcCatalogRequest

Swarm

Represents a team of agents, Salesforce users, or Slack users in a Slack channel or thread dedicated to solving a problem. This problem can be related to a support case, incident, sales opportunity, or change request. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access this object for swarming in Salesforce, enable the Run Flows and Service Cloud User user permissions. For swarming in Slack, connect Salesforce to Slack and enable the Run Flows and Slack Service User user permissions.

Fields

Field	Details
CollaborationRoomId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the collaboration room. This field is a relationship field. Relationship Name CollaborationRoom Relationship Type Lookup Refers To CollaborationRoom
CollaborationTool	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Tool used for swarming. Possible values are: • None • Slack The default value is None.
CollaborationUrl	Type url Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description URL of the Slack channel or thread.
EndedDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date and time the swarm ended.
HelpNeeded	Type textarea Properties Create, Nillable, Update Description Short description of the problem that the swarm is trying to solve.
IsDedicatedChannel	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates if the swarm is happening in a dedicated channel (<code>true</code>) or in an existing channel (<code>false</code>). The default value is <code>false</code> .
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.

Field	Details
MessageKey	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the Slack thread or message.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the swarm.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the swarm owner. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
RelatedRecordId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the record the swarm's problem is related to. The record can be of, for example, a case, incident, sales opportunity, or change request. This field is a polymorphic relationship field. Relationship Name RelatedRecord Relationship Type Lookup

Field	Details
	Refers To Account, Case, ChangeRequest, Incident, Opportunity, Problem, User
StartedDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date and time the swarm started.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Status of the swarm. Possible values are: • Closed • In Progress • New • Waiting (Custom) The default value is New.
UsageType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Type of swarm. Possible values are: • CareMgmt—Care Coordination • DealRoom—Sales Channel • PartnerChannel—Partner Account Channel • Swarming The default value is Swarming.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

SwarmFeed on page 55

Feed tracking is available for the object.

SwarmHistory on page 63

History is available for tracked fields of the object.

SwarmOwnerSharingRule on page 65

Sharing rules are available for the object.

SwarmShare on page 67

Sharing is available for the object.

SwarmMember

Represents a Salesforce member, such as an agent, of a swarm. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access this object for swarming in Salesforce, enable the Run Flows and Service Cloud User user permissions. For swarming in Slack, connect Salesforce to Slack and enable the Run Flows and Slack Service User user permissions.

Fields

Field	Details
AssignedDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date and time the member is added to the swarm.
CompletedDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date and time the member exits the swarm or the swarm closes.

Field	Details
HelpNeeded	Type textarea Properties Create, Nillable, Update Description Short description of the problem that the swarm is trying to solve.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the swarm or record number.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the Salesforce user assigned to a swarm. This field is a polymorphic relationship field. Relationship Name Owner

Field	Details
	Relationship Type Lookup Refers To Group, User
RelatedRecordId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the record the swarm's problem is related to. The record can be of, for example, a case, incident, sales opportunity, or change request. This field is a polymorphic relationship field. Relationship Name RelatedRecord Relationship Type Lookup Refers To Account, Case, ChangeRequest, Incident, Opportunity, Problem, User
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Status of the swarm member or swarm. Possible values are: • Closed • In Progress • New The default value is New.
SwarmId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the swarm the member belongs to. This field is a relationship field.

Field	Details
	Relationship Name Swarm
	Relationship Type Lookup
	Refers To Swarm

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

SwarmMemberFeed on page 55

Feed tracking is available for the object.

SwarmMemberHistory on page 63

History is available for tracked fields of the object.

SwarmMemberOwnerSharingRule on page 65

Sharing rules are available for the object.

SwarmMemberShare on page 67

Sharing is available for the object.

TabDefinition

Represents a custom tab. Returns only the tabs that the current user has access to. This object is available in API version 43.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `search()`

Fields

Field Name	Details
DurableId	Type string
	Properties Filter, Group, Nillable, Sort
	Description Unique identifier for the tab. Always retrieve this value before using it, because the value isn't guaranteed to stay the same from one release to the next. Simplify queries by using this field instead of making multiple queries.

Field Name	Details
IsAvailableInAloha	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the tab is available in Salesforce Classic.
IsAvailableInDesktop	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the tab is available on desktop.
IsAvailableInLightning	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the tab is available in Lightning Experience.
IsAvailableInMobile	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the tab is available in the Salesforce mobile app.
IsCustom	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the tab is a custom tab created by admins in the org.
Label	Type string Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description The localized label corresponding to the <code>MasterLabel</code> field in the Tooling API object.
<code>MobileUrl</code>	Type string Properties Filter, Group, Nillable, Sort Description The URL that can be used to launch this tab in the Salesforce mobile app.
<code>Name</code>	Type string Properties Filter, Group, Nillable, Sort Description The developer name of the tab.
<code>ObjectName</code>	Type string Properties Filter, Group, Nillable, Sort Description The name of the sObject corresponding to the tab.
<code>Url</code>	Type string Properties Filter, Group, Nillable, Sort Description The URL that can be used to launch this tab on desktop.

TagDefinition

Defines the attributes of child Tag objects.

Supported Calls

`delete()`, `describeSObjects()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`

Special Access Rules

As of Summer '20 and later, only authenticated internal and external users can access this object.

Fields

Field	Detail
Name	Type string Properties Filter, Nillable, Update Description Identifies the tag word or phrase.
Type	Type picklist Properties Filter, Nillable, Restricted picklist Description Defines the visibility of a tag. Possible value are: • Public: The tag can be viewed and manipulated between all users in an organization. • Personal: The tag can be viewed or manipulated only by a user with a matching <code>OwnerId</code>.

Usage

When you create a tag for a record, an association is created with to a corresponding TagDefinition:

- If the value in the tag's `Name` field is new, a new TagDefinition record is automatically created and becomes the parent of the tag.
- If the value in the tag's `Name` field already exists in a TagDefinition, that TagDefinition automatically becomes the parent of the tag.

Each TagDefinition record has a one-to-many relationship with its child tag records.

The following standard objects represent tags for records:

- AccountTag
- AssetTag
- CampaignTag
- CaseTag
- ContactTag
- ContractTag
- DocumentTag
- EventTag
- LeadTag

- NoteTag
- OpportunityTag
- SolutionTag
- TaskTag

Custom objects may also be tagged. Tags for custom objects are identified by a suffix of two underscores immediately followed by the word `tag`. For example, a custom object named `Meeting` has a corresponding tag named `Meeting__tag` in that organization's WSDL. `Meeting__tag` is only valid for `Meeting` objects.

`TagDefinition` is useful for mass operations on any tag record. For instance, if you want to rename existing tags, you can search for the appropriate `TagDefinition` object, update it, and the child tag's `Name` values are also changed. The following Java example replaces all `WC` tags with the phrase `West Coast`:

```
public void tagDefinitionSample() {
    String sqlQuery = "SELECT Id, Name FROM TagDefinition " +
        "WHERE Name = 'WC'";
    QueryResult qResult = null;
    try {
        qResult = connection.query(sqlQuery);
        TagDefinition tagDef = (TagDefinition) qResult.getRecords()[0];
        tagDef.setName("West Coast");
        connection.update(new SObject[]{tagDef});
    } catch (ConnectionException ce) {
        ce.printStackTrace();
    }
}
```

When a tag is deleted, its parent `TagDefinition` will also be deleted if the name is not being used; otherwise, the parent remains. Deleting a `TagDefinition` sends it to the Recycle Bin, along with any associated tag entries.

Task

Represents a business activity such as making a phone call or other to-do items. In the user interface, Task and Event records are collectively referred to as activities.



Note: Task fields related to calls are exclusive to Salesforce CRM Call Center. Also, `query()`, `delete()`, and `update()` aren't allowed with tasks related to more than one contact in API versions 23.0 and earlier.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Field Type
<code>AccountId</code>	Type reference

Field	Field Type
	Properties Filter, Group, Nillable, Sort Description Represents the ID of the related Account. The <code>AccountId</code> is determined as follows. If the value of <code>whatId</code> is any of these objects, Salesforce uses that object's <code>AccountId</code>. - Account - Opportunity - Contract - Custom object that is a child of Account If the value of the <code>whatId</code> field is any other object, and the value of the <code>whoId</code> field is a Contact object, then Salesforce uses that contact's <code>AccountId</code>. (If your organization uses Shared Activities, then Salesforce uses the <code>AccountId</code> of the primary contact.) Otherwise, Salesforce sets the value of the <code>AccountId</code> field to <code>null</code>. For information on IDs, see ID Field Type. This is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
ActivityDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Represents the due date of the task. This field has a timestamp that is always set to midnight in the Coordinated Universal Time (UTC) time zone. The timestamp is not relevant; do not attempt to alter it to accommodate time zone differences. Label is Due Date. This field can't be set or updated for a recurring task (<code>IsRecurrence</code> is <code>true</code>).
CallDisposition	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Represents the result of a given call, for example, "we'll call back," or "call unsuccessful." Limit is 255 characters.

Field	Field Type
	Not subject to field-level security, available for any user in an organization with Salesforce CRM Call Center.
CallDurationInSeconds	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Duration of the call in seconds. Not subject to field-level security, available for any user in an organization with Salesforce CRM Call Center.
CallObject	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Name of a call center. Limit is 255 characters. Not subject to field-level security, available for any user in an organization with Salesforce CRM Call Center.
CallType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of call being answered. Possible values are: • Inbound • Internal • Outbound When working with PushTopic, the CallType values display as 1 for Inbound, 0 for Internal, and 2 for Outbound.
CompletedDateTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time the task was saved with a Closed status.

Field	Field Type
	- For insert, if the task is saved with a Closed status the field is set. If the task is saved with an Open status the field is set to NULL. - For update, if the task is saved with a new Closed status, the field is reset. If the task is saved with a new non-closed status, the field is reset to NULL. If the task is saved with the same closed status (that is, unchanged) there is no change to the field. The status is a dynamic enum. If the Closed mapping is changed it won't cause an update of existing tasks. Only new insert/update operations are affected.
ConnectionReceivedId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the PartnerNetworkConnection that shared this record with your organization. This field is available if you enabled Salesforce to Salesforce.
ConnectionSentId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the PartnerNetworkConnection that you shared this record with. This field is available if Salesforce to Salesforce is enabled. This field is supported in API versions 14.0 and earlier. In API version 15.0 and later, this field's value is null. You can use the new PartnerNetworkRecordConnection object to forward records to connections.
Description	Type textarea Properties Create, Nillable, Update Description Contains a text description of the task. The text provided in the Description field shows in the Comments field on the task record detail page.
IsArchived	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the event has been archived. The default value of this field is <code>false</code>.

Field	Field Type
IsClosed	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the task has been completed (<code>true</code>) or not (<code>false</code>). The default value of this field is <code>false</code>. Is only set indirectly via the <code>Status</code> picklist. Label is Closed.
IsHighPriority	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates a high-priority task. This field is derived from the <code>Priority</code> field. The default value of this field is <code>false</code>.
IsRecurrence	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether the task is scheduled to repeat itself (<code>true</code>) or only occurs once (<code>false</code>). The default value of this field is <code>false</code>. This field is read-only on update, but not on create. If this field value is <code>true</code>, then <code>RecurrenceStartDateOnly</code>, <code>RecurrenceEndDateOnly</code>, <code>RecurrenceType</code>, and any recurrence fields associated with the given recurrence type must be populated. See Usage section.
IsReminderSet	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether a popup reminder has been set for the task (<code>true</code>) or not (<code>false</code>). The default value of this field is <code>false</code>.
IsVisibleInSelfService	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether a task associated with an object can be viewed in the Customer Portal (<code>true</code>) or not (<code>false</code>).

Field	Field Type
	If your organization has digital experiences enabled, tasks marked <code>IsVisibleInSelfService</code> are visible to any external user in the Experience Cloud site, as long as the user has access to the record the task was created on.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the User or Group who owns the record. Label is Assigned To ID. This field accepts Groups of type Queue only. In the user interface, Group IDs correspond with the queue's list view names. To create or update tasks assigned to Group, use v48.0 or later. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
Priority	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Required. Indicates the importance or urgency of a task, such as high or low. The default value of this field is <code>Normal</code>.
RecurrenceActivityId	Type reference Properties Filter, Group, Nillable, Sort Description Read-only. Not required on create. ID of the main record of the recurring task. Subsequent occurrences have the same value in this field.
RecurrenceDayOfMonth	Type int Properties Create, Filter, Group, Nillable, Sort, Update

Field	Field Type
	Description The day of the month in which the task repeats.
RecurrenceDayOfWeekMask	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The day or days of the week on which the task repeats. This field contains a bitmask. The values are as follows: • Sunday = 1 • Monday = 2 • Tuesday = 4 • Wednesday = 8 • Thursday = 16 • Friday = 32 • Saturday = 64 Multiple days are represented as the sum of their numerical values. For example, Tuesday and Thursday = 4 + 16 = 20.
RecurrenceEndDateOnly	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The last date on which the task repeats. This field has a timestamp that is always set to midnight in the Coordinated Universal Time (UTC) time zone. The timestamp is not relevant; do not attempt to alter it to accommodate time zone differences.
RecurrenceInstance	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The frequency of the recurring task. Possible values are: • First—1st • Fourth—4th • Last—last • Second—2nd

Field	Field Type
	• Third—3rd
RecurrenceInterval	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The interval between recurring tasks.
RecurrenceMonthOfYear	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The month of the year in which the task repeats.
RecurrenceRegeneratedType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Represents what triggers a repeating task to repeat. Add this field to a page layout together with the <code>RecurrenceInterval</code> field, which determines the number of days between the triggering date (due date or close date) and the due date of the next repeating task in the series. Label is Repeat This Task. This field has the following picklist values: • None: The task doesn't repeat. • After due date: The next repeating task will be due the specified number of days after the current task's due date. • After the task is closed: The next repeating task will be due the specified number of days after the current task is closed. • (Task closed): This task, now closed, was opened as part of a repeating series. When tasks in a series are set to repeat after their due date, Salesforce doesn't create recurrences that would have been due in the past. Instead, Salesforce keeps adding the interval until a repeated task has a due date in the future. For example, suppose that someone sets a task to repeat three days after it's due. But, that person doesn't complete the task (mark it Closed) until five days after it's due. Instead of creating a task that's already overdue, Salesforce gives the new task a due date of tomorrow. This due date is equivalent to 6 days after the due date; two intervals of three days each. If that person completes the repeating task (marks it Closed) before the due date, the next task is still due three days after the due date.

Field	Field Type
RecurrenceStartDateOnly	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date when the recurring task begins. Must be a date and time before <code>RecurrenceEndDateOnly</code>.
RecurrenceTimeZoneSidKey	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The time zone associated with the recurring task. For example, "UTC-8:00" for Pacific Standard Time.
RecurrenceType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates how often the task repeats. For example, daily, weekly, or every nth month (where "nth" is defined in <code>RecurrenceInstance</code>).
ReminderDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Represents the time when the reminder is scheduled to fire, if <code>IsReminderSet</code> is set to <code>true</code>. If <code>IsReminderSet</code> is set to <code>false</code>, then the user may have deselected the reminder checkbox in the Salesforce user interface, or the reminder has already fired at the time indicated by the value.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Required. Indicates the status of the task. The default value of this field is <code>Not Started</code>. Each predefined <code>Status</code> field implies a value for the <code>IsClosed</code> flag. To obtain picklist values, query the <code>TaskStatus</code> object.

Field	Field Type
	Possible values are: - Completed - Deferred - In Progress - Not Started - Waiting on someone else This field can't be updated for recurring tasks (<code>IsRecurrence</code> is <code>true</code>).
Subject	Type combobox Properties Create, Filter, Nillable, Sort, Update Description The subject line of the task, such as "Call" or "Send Quote." Limit: 255 characters.
TaskSubtype	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Provides standard subtypes to facilitate creating and searching for specific task subtypes. This field can't be updated. TaskSubtype values: - Task - Email - LinkedIn —Available in API version 56.0 and later. - ListEmail - Cadence - Call The Cadence subtype is an internal value used by Sales Engagement, and can't be set manually.
TaskWhoIds	Type JunctionIdList Properties Create, Update Description A string array of contact or lead IDs related to this task. This <code>JunctionIdList</code> field is linked to the <code>TaskWhoRelationships</code> child relationship. <code>TaskWhoIds</code> is only available when the shared activities setting is enabled. The first contact or lead ID in the list becomes

Field	Field Type
	the primary <code>WhoId</code> if you don't specify a primary <code>WhoId</code>. If you set the <code>EventWhoIds</code> field to null, all entries in the list are deleted and the value of <code>WhoId</code> is added as the first entry.  Warning: Adding a <code>JunctionIdList</code> field name to the <code>fieldsToNull</code> property deletes all related junction records. This action can't be undone.
Type	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The type of task, such as Call or Meeting.
WhatCount	Type int Properties Filter, Group, Nillable, Sort Description Available to organizations that have Shared Activities enabled. Count of related TaskRelations pertaining to <code>WhatId</code>. Count of the <code>WhatId</code> must be 1 or less.
WhatId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The <code>WhatId</code> represents nonhuman objects such as accounts, opportunities, campaigns, cases, or custom objects. <code>WhatIds</code> are polymorphic. Polymorphic means a <code>WhatId</code> is equivalent to the ID of a related object. The label is <code>Related To ID</code>. This is a polymorphic relationship field. Relationship Name What Relationship Type Lookup Refers To Account, Accreditation, AssessmentIndicatorDefinition, AssessmentTask, AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskOrder, Asset, AssetRelationship, AssignedResource, Award, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, Campaign, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis, CareInterventionType, CareMetricTarget, CareObservation, CareObservationComponent, CarePgmProvHealthcareProvider, CarePreauth, CarePreauthItem, CareProgram,

Field	Field Type
	CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee, CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider, CareProgramTeamMember, CareProviderAdverseAction, CareProviderFacilitySpecialty, CareProviderSearchableField, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareSpecialtyTaxonomy, CareTaxonomy, Case, CommSubscriptionConsent, ContactEncounter, ContactEncounterParticipant, ContactRequest, Contract, CoverageBenefit, CoverageBenefitItem, CreditMemo, DelegatedAccount, DocumentChecklistItem, EnrollmentEligibilityCriteria, HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, IdentityDocument, Image, IndividualApplication, Invoice, ListEmail, Location, MemberPlan, Opportunity, Order, OtherComponentTask, PartyConsent, PersonLifeEvent, PlanBenefit, PlanBenefitItem, ProcessException, Product2, ProductItem, ProductRequest, ProductRequestLineItem, ProductTransfer, PurchaserPlan, ReceivedDocument, ResourceAbsence, ReturnOrder, ReturnOrderLineItem, ServiceAppointment, ServiceResource, Shift, Shipment, ShipmentItem, Solution, Visit, VisitedParty, VolunteerProject, WorkOrder, WorkOrderLineItem
WhoCount	Type int Properties Filter, Group, Nillable, Sort Description Available to organizations that have Shared Activities enabled. Count of related TaskRelations pertaining to WhoId.
WhoId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The Whold represents a human such as a lead or a contact. Wholds are polymorphic. Polymorphic means a Whold is equivalent to a contact's ID or a lead's ID. The label is Name ID. If Shared Activities is enabled, the value of this field is the ID of the related lead or primary contact. If you add, update, or remove the Whold field, you might encounter problems with triggers, workflows, and data validation rules that are associated with the record. The label is Name ID. Beginning in API version 37.0, if the contact or lead ID in the WhoId field is not in the TaskWhoIds list, no error occurs and the ID is added to the TaskWhoIds as the primary WhoId. If WhoId is set to null, an arbitrary ID from the existing TaskWhoIds list is promoted to the primary position. This is a polymorphic relationship field.

Field	Field Type
	Relationship Name Who
	Relationship Type Lookup
	Refers To Contact, Lead

Usage

Recurring Tasks

- Recurring tasks are available in API version 16.0 and later.
- After a task is created, it can't be changed from recurring to nonrecurring or vice versa.
- When a user creates a series of recurring tasks, Salesforce creates a main record and subsequent occurrences. For the main record, `IsRecurrence` is set to `true` and other fields that define the recurrence pattern are populated. The ID of the main record of the recurring task is saved in the subsequent occurrences, in the `RecurrenceActivityId` field.
- When you delete a recurring task series through the API, all open and closed task occurrences in the series are removed. However, when you delete a recurring task series through the user interface, only open tasks occurrences (`IsClosed` is `false`) in the series are removed.
- If `IsRecurrence` is `true`, then `RecurrenceStartDateOnly`, `RecurrenceEndDateOnly`, `RecurrenceType`, and any properties associated with the given recurrence type (see the following table) must be populated.
- When you change the `RecurrenceStartDateOnly` field or the recurrence pattern, all open tasks occurrences in the series are deleted and new open task occurrences are created based on the new recurrence pattern. The following fields determine the recurrence pattern: `RecurrenceType`, `RecurrenceTimeZoneSidKey`, `RecurrenceInterval`, `RecurrenceDayOfWeekMask`, `RecurrenceDayOfMonth`, `RecurrenceInstance`, and `RecurrenceMonthOfYear`.
- When you change the value of `RecurrenceEndDateOnly` to an earlier date (for example, from January 20 to January 10), all open task occurrences in the series with the `ActivityDate` value greater than the new end date value are deleted. Other open and closed task occurrences in the series are not affected.
- When you change the value of `RecurrenceEndDateOnly` to a later date (for example, from January 10 to January 20), new task occurrences are created up to the new end date. Existing open and closed tasks in the series are not affected.

This table describes the usage of recurrence fields for Salesforce Classic recurring events. Each recurrence type must have all of its properties set. All unused properties must be set to null.

RecurrenceType Value	Properties	Example Pattern
RecursDaily	RecurrenceInterval	Every second day
RecursEveryWeekday	RecurrenceDayOfWeekMask	Every weekday - can't be Saturday or Sunday
RecursMonthly	RecurrenceDayOfMonth RecurrenceInterval	Every second month, on the third day of the month
RecursMonthlyNth	RecurrenceInterval RecurrenceInstance RecurrenceDayOfWeekMask	Every second month, on the last Friday of the month

RecurrenceType Value	Properties	Example Pattern
RecursWeekly	RecurrenceInterval RecurrenceDayOfWeekMask	Every three weeks on Wednesday and Friday
RecursYearly	RecurrenceDayOfMonth RecurrenceMonthOfYear	Every March on the 26th day of the month
RecursYearlyNth	RecurrenceDayOfWeekMask RecurrenceInstanceRecurrenceMonthOfYear	The first Saturday in every October

JunctionIdList

The `JunctionIdList` field is now implemented in the Event and Task objects. With a single API call, it's easy to create many-to-many relationships between the Event or Task object with contacts, leads, or users.

To create a Task with related Contacts without `JunctionIdList`, you first have to create the task, then use the returned task ID to create the `TaskRelation` records. If the `TaskRelation` save call fails, error handling is your responsibility because the task has already been committed to the database.

```
public void createTasksOld(Contact[] contacts) {
    Task task = new Task();
    task.setSubject("New Task");
    SaveResult[] results = null;
    try {
        results = connection.create(new Task[] {
            task
        });
        if (results[0].isSuccess()) {
            TaskRelation[] relations = new TaskRelation[contacts.size()];
            for (int i = 0; i < contacts.length; i++) {
                relations[i] = new TaskRelation();
                relations[i].setTaskId(results[0].getID());
                relations[i].setRelationId(contacts[i].getID());
            }
            results = connection.create(relations);
        }
    } catch (ConnectionException ce) {
        ce.printStackTrace();
    }
}
```

To create a task using `JunctionIdList`, IDs are pulled from the related contacts and both the task and the `TaskRelation` records are created in one API call. If the `TaskRelation` fails, the task is rolled back because it's all done in a single API call.

```
public void createTaskNew(Contact[] contacts) {
    String[] contactIds = new String[contacts.size()];
    for (int i = 0; i < contacts.size(); i++) {
        contactIds[i] = contacts[i].getID();
    }
    Task task = new Task();
    task.setSubject("New Task");
    task.setTaskWhoIds(contactIds);
    SaveResult[] results = null;
    try {
```

```
results = connection.create(new Task[] {  
    task  
});  
} catch (ConnectionException ce) {  
    ce.printStackTrace();  
}  
}
```

Shared Field-Level Security for Event and Task Objects

Metadata deployments for the Task object should always include the field-level security for the Event object. Shared field-level security prevents each object from changing the field-level security of the associated object.

Metadata deployments that include field-level security for only one of either the Event or Task objects can cause field-level security changes to the other object that aren't reflected in the metadata.

- If field-level security is enabled for one object, then field-level security is enabled for both objects.
- If field-level security is disabled for one object, then it's disabled for both objects.



Note: A missing entry in the metadata is treated as field-level security being disabled.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

TaskChangeEvent (API version 44.0)

Change events are available for the object.

TaskFeed (API version 20.0)

Feed tracking is available for the object.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

TaskPriority

Represents the importance or urgency of a task, such as High, Normal, or Low.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Customer and Partner Portal users can't access this object.

Fields

Field	Details
ApiName	Type string Properties Filter, Group, idLookup, Sort Description Uniquely identifies a picklist value so it can be retrieved without using an ID or master label.
IsDefault	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the status is the default task priority value (<code>true</code>) or not (<code>false</code>) in the picklist. Only one value in the picklist can be the default value.
IsHighPriority	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this task priority value represents a high priority task (<code>true</code>) or not (<code>false</code>). Multiple task priority values can represent a high-priority task.
MasterLabel	Type string Properties Filter, Group, Nillable, Sort Description Master label for this task priority value. This display value is the internal label that doesn't get translated. Limit: 255 characters.
SortOrder	Type int Properties Filter, Nillable, Group, Sort Description Number used to sort this value in the task priority picklist. These numbers aren't guaranteed to be sequential, as some previous task priority values might have been deleted.

Usage

This object represents a value in the task priority picklist. The task priority picklist provides additional information about the importance of a task , such as whether a given priority value represents a high priority. Your client application can query on this object to retrieve the set of values in the task priority picklist, and then use that information while processing task objects to determine more information about a given task. For example, the application could test whether a given task is high priority based on its `Priority` value and the value of the `IsHighPriority` field in the associated `TaskPriority` object.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

TaskRelation

Represents the relationship between a task and a lead, contacts, and other objects related to the task. If Shared Activities is enabled, this object doesn't support triggers, workflow, or data validation rules. This object is available in API version 24.0 and later.

TaskRelation is only available if you've enabled Shared Activities in your organization.

TaskRelation allows the following relationships:

- A task can be related to one lead or up to 50 contacts.
- A task can also be related to one account, asset, campaign, case, contract, opportunity, product, solution, or custom object.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `queryAll()`, `retrieve()`

Fields

Field Name	Details
AccountId	Type reference Properties Filter, Group, Nillable, Sort Description Indicates the Account ID of the relation. For information on IDs, see ID Field Type.
IsWhat	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort

Field Name	Details
	Description Indicates whether the relation is an Account, Opportunity, Campaign, Case, other standard object, or a custom object. Value is <code>false</code> if <code>RelationId</code> is a contact or lead and <code>true</code> otherwise.
<code>RelationId</code>	Type reference Properties Create, Filter, Group, Sort Description Indicates the <code>whatId</code> or <code>whoId</code> in the relationship. For more information, see Task. For information on IDs, see ID Field Type.
<code>TaskId</code>	Type reference Properties Create, Filter, Group, Sort Description Represents the ID of the associated Task. For information on IDs, see ID Field Type.

Usage

See contacts associated with a task

```
public void queryWhosOfTaskSample() {
    String soqlQuery = "SELECT Id, Subject, (SELECT RelationId, Relation.Name, IsWhat
from TaskRelations WHERE isWhat = false) FROM Task WHERE Id = '00T x0000005OKEN'";
    QueryResult qResult = null;
    try {
        qResult = connection.query(soqlQuery);
        TaskRelation relation1 =
(TaskRelation)qResult.getRecords()[0].getTaskRelations().getRecords()[0];
    } catch (ConnectionException ce) {
        ce.printStackTrace();
    }
}
```

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

TaskRelationChangeEvent (API version 44.0)

Change events are available for the object.

SEE ALSO:

- [Task](#)
- [TaskWhoRelation](#)

TaskStatus

Represents the status of a task, such as Not Started, Completed, or Closed.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Customer Portal users can't access this object.

Fields

Field	Details
ApiName	Type string Properties Filter, Group, idLookup, Sort Description Uniquely identifies a picklist value so it can be retrieved without using an ID or master label.
IsClosed	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this task status value represents a closed task (<code>true</code>) or not (<code>false</code>). Multiple task status values can represent a closed task.
IsDefault	Type boolean

Field	Details
	Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the status is the default task status value (<code>true</code>) or not (<code>false</code>) in the picklist.
MasterLabel	Type string Properties Filter, Group, Nillable, Sort Description Master label for this task status value. This display value is the internal label that doesn't get translated. Limit: 255 characters.
SortOrder	Type int Properties Filter, Group, Nillable, Sort Description Number used to sort this value in the task status picklist. These numbers aren't guaranteed to be sequential, as some previous task status values might have been deleted.

Usage

This object represents a value in the task status picklist. The task status picklist provides additional information about the status of a task, such as whether a given status value represents an open or closed task. Your client application can query this object to retrieve the set of values in the task status picklist, and then use that information while processing task records to determine more information about a given task. For example, the application could test whether a given task is open or closed based on the task `status` value and the value of the `IsClosed` property in the associated `TaskStatus` record.

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

TaskTag

Associates a word or short phrase with a task .

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
ItemId	Type reference Properties Create, Filter Description ID of the tagged item.
Name	Type string Properties Create, Filter Description Name of the tag. If this value does not already exist, a new TagDefinition is created and becomes the parent of this Tag object. Otherwise, a TagDefinition with the same name becomes the parent of this Tag object. Parent relationships are created automatically.
TagDefinitionId	Type reference Properties Filter Description ID of the parent TagDefinition object that owns the tag.
Type	Type picklist Properties Create, Filter, Restricted picklist Description Defines the visibility of a tag. Valid values: • Public—The tag can be viewed and manipulated by all users in an organization. • Personal—The tag can be viewed or manipulated only by a user with a matching OwnerId.

Usage

TaskTag stores the relationship between its parent TagDefinition and the task being tagged. Tag objects act as metadata, allowing users to describe and organize their data.

When a tag is deleted, its parent TagDefinition will also be deleted if the name is not being used; otherwise, the parent remains. Deleting a TagDefinition sends it to the Recycle Bin, along with any associated tag entries.

TaskWhoRelation

Represents the relationship between a task and a lead or contacts. This object is available in API version 29.0 and later.

TaskWhoRelation allows a variable number of relationships: one lead or up to 50 contacts. Available only if you've enabled Shared Activities for your organization.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
AccountId	Type reference Properties Filter, Group, Nillable, Sort Description Indicates the Account ID of the relation. For information on IDs, see ID Field Type.
RelationId	Type reference Properties Filter, Group, Nillable, Sort Description Indicates the ID of the contacts or lead related to the task.
TaskId	Type reference Properties Filter, Group, Nillable, Sort Description Indicates the ID of the task.
Type	Type string Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description Indicates whether the person related to the task is a lead or contact.

Usage

Here's a Java example that queries contacts associated with a task.

```
public void queryWhosOfTaskSample() {
    String soqlQuery = "SELECT Id, Subject, (SELECT RelationId, Relation.Name, IsWhat from TaskWhoRelations) FROM Task WHERE Id = '00Tx0000005OKEN'";
    QueryResult qResult = null;
    try {
        qResult = connection.query(soqlQuery);
        TaskWhoRelation relation1 =
(TaskWhoRelation)qResult.getRecords()[0].getTaskWhoRelations().getRecords()[0];
    } catch (ConnectionException ce) {
        ce.printStackTrace();
    }
}
```

SEE ALSO:

[Task](#)

[TaskRelation](#)

TaxEngine

A tax engine represents both an instance of a tax engine provider as well as the merchant credentials for that specific instance. When Subscription Management calculates tax on an order item, it sends a request through Subscription Management Tax Calculation API to an external tax engine. The Salesforce tax engine record contains information passed to the external tax engine, such as This object is available in API version 55.0 and later.

The merchant credentials are stored in a named credential record in Salesforce. The named credential record is referenced in the tax engine object's Merchant Credentials field.

The tax adapter Apex class ID is stored in the tax engine provider. When a user calls Calculate Tax API, Subscription Management interacts with the external tax provider using the adapter class and the named credentials.

The tax engine address and seller code from the TaxEngine record are also used in the interaction.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available when Subscription Management or Commerce Subscriptions is enabled. If your org has Subscription Management and Commerce Subscriptions enabled, then Subscription Management takes precedence.

Special Access Rules

This object is available with Subscription Management, Commerce Subscriptions, and Billing (Revenue Cloud). If your org has Subscription Management and Commerce Subscriptions enabled, then Subscription Management takes precedence.

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description The description of the tax engine provider and merchant credential.
ExternalReference	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description Shows information about the external platform used for the tax engine.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
MerchantCredentialId	Type reference Properties Create, Filter, Group, Sort, Update Description Looks up to the merchant credential setup entity in Salesforce. CommerceTax Tax Calculation API sends this information to the external tax engine for use in the tax calculation process. This field is a relationship field. Relationship Name MerchantCredential Relationship Type Lookup Refers To NamedCredential
SellerCode	Type string Properties Create, Filter, Group, Sort, Update Description Seller code of the transaction for which the tax engine integration log was captured.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Shows the status of the tax engine. Possible values are: • Active—This tax engine is available for use. • Inactive—This tax engine isn't available for use.
TaxEngineAddress	Type address Properties Filter

Field	Details
	Description The compound form of the tax engine address. Read-only. See Address Compound Fields for details on compound address fields.
TaxEngineCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the tax engine address. Maximum size is 40 characters.
TaxEngineCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the tax engine address. Maximum size is 80 characters.
TaxEngineGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Accuracy level of the geocode for the tax engine address. See Compound Field Considerations and Limitations for details on geolocation compound fields.
TaxEngineLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with TaxEngineLongitude to specify the precise geolocation of a tax engine address. Acceptable values are numbers between –90 and 90 with up to 15 decimal places. See Compound Field Considerations and Limitations for details on geolocation compound fields.
TaxEngineLongitude	Type double Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description Used with TaxEngineLatitude to specify the precise geolocation of a tax engine address. Acceptable values are numbers between –180 and 180 with up to 15 decimal places. See Compound Field Considerations and Limitations for details on geolocation compound fields.
TaxEngineName	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the tax engine.
TaxEnginePostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the tax engine address. Postal code maximum size is 20 characters.
TaxEngineProviderId	Type reference Properties Create, Filter, Group, Sort, Update Description The Id of the tax engine provider. This field is a relationship field. Relationship Name TaxEngineProvider Relationship Type Lookup Refers To TaxEngineProvider
TaxEngineState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the tax engine address. State maximum size is 80 characters.

Field	Details
TaxEngineStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Details for the tax engine address. Maximum of 255 characters.
TaxPrvdAccountIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The unique identifier of the external tax provider's account. This field is only available if Commerce Subscriptions is enabled for your org. Available in API version 63.0 and later.
Type	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the tax engine used to calculate tax. This field is only available if Commerce Subscriptions is enabled for your org. Available in API version 63.0 and later. Possible values are: - CommerceTaxExtension—Commerce Tax Extension - RevenueCloudTaxExtension—Revenue Cloud Tax Extension - StandardTaxEngine—Standard Tax Extension - StripeNative—Stripe Native

TaxEngineInteractionLog

A record of a communication with an external tax engine following a tax calculation request. This object is available in API version 55.0 and later.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
Description	Type textarea Properties Filter, Nillable, Sort Description Optional user-defined description for providing more information about the tax engine interaction log.
DocumentCode	Type string Properties Filter, Group, Nillable, Sort Description Document code of the transaction for which the tax engine integration log was captured.
EffectiveDate	Type dateTime Properties Filter, Nillable, Sort Description The date that the tax engine request takes effect. This date is available for reference and bookkeeping only and doesn't have any impact on tax calculation.
InteractionHttpStatusCode	Type int Properties Filter, Group, Nillable, Sort Description The HTTP result code of the external callout made to a third-party tax engine provider. Refer to your third-party tax engine provider's documentation for details about the specific codes returned.
InteractionType	Type picklist

Field	Details
	Properties Filter, Group, Nillable, Restricted picklist, Sort Description Shows the type of request made to the tax engine. In Subscription Management Summer '22, only <code>CalculateTax</code> is supported. Possible values are: • <code>CalculateTax</code>
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
ReferenceEntity	Type string Properties Filter, Group, Nillable, Sort Description The record on which tax was calculated.
RequestBody	Type base64 Properties Nillable Description Contains the content of the tax calculation API request.
RequestContentType	Type picklist

Field	Details
	Properties Filter, Group, Nillable, Restricted picklist, Sort Description Shows the type of data passed in the request. For example, <code>application/html</code> or <code>text/csv</code>.
RequestLength	Type int Properties Filter, Group, Nillable, Sort Description The character length of text within the request body.
RequestName	Type string Properties Filter, Group, Nillable, Sort Description The name of the request.
ResponseBody	Type base64 Properties Nillable Description Contains the content of the tax calculation API response.
ResponseContentType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Shows the method used to deliver the tax calculation API response, such as <code>application/html</code> or <code>text/vnd.salesforce.quip-template</code>.
ResponseLength	Type int Properties Filter, Group, Nillable, Sort Description The character length of text within the response body.

Field	Details
ResponseName	Type string Properties Filter, Group, Nillable, Sort Description Name of the response from the tax engine.
ResultCode	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The code describing the result of the request. Possible values are: • AdapterException—The Apex adapter interface for the tax provider threw an exception. • Success—The request was successful. • TaxEngineError—An error occurred while processing the request. See the log for details. • ValidationError—A validation error occurred. Check that the request is complete and valid.
TaxEngineId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the tax engine used in the tax calculation process. This field is a relationship field. Relationship Name TaxEngine Relationship Type Lookup Refers To TaxEngine
TaxEngineInteractionLogNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort

Field	Details
	Description A system-generated number for a log entry.

TaxEngineProvider

Represents general information about a service that manages a tax engine, such as the ID of the tax adapter Apex class in Salesforce, and the engine's namespace prefix. Tax engine providers have a one-to-many relationship with tax engines, where the tax engine record represents a specific configuration of a tax engine that can be assigned to multiple order items. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
ApexAdapterId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The Id of the Apex adapter used by this tax provider. This field is unique within your organization. This field is a relationship field. Relationship Name ApexAdapter Relationship Type Lookup Refers To ApexClass
Description	Type textarea

Field	Details
	Properties Create, Filter, Nillable, Sort, Update Description The description of the tax engine provider.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The API name for the record.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language used by this tax engine provider. Values appear based on their language codes in Salesforce, such as <code>da</code> for Danish or <code>th</code> for Thai.
MasterLabel	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Label used for the tax engine's API in Salesforce.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description Apex namespace prefix of the API used for the tax engine. In a packaging context, a namespace prefix is a one to 15-character alphanumeric identifier that distinguishes your package and its contents from packages of other developers on AppExchange.

TaxGeoConfig

Represents a tax configuration associated with a GeoCountry. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The TaxGeoConfig object is available if B2B Commerce or D2C Commerce is enabled.

Fields

Field	Details
GeoCountryId	Type reference Properties Create, Filter, Group, Sort Description The GeoCountry associated with the TaxGeoConfig. This field is a relationship field. Relationship Name GeoCountry Relationship Type Lookup Refers To GeoCountry
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed data in this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible the user accessed data in this record or list view but didn't view it directly.

Field	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the TaxGeoConfig.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the TaxGeoConfig record. By default, the asset owner is the user who created the record. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
RoundingStrategyType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Specifies the tax rounding strategy associated with the TaxGeoConfig. Possible values are: • Rounding Down • Rounding Off • Rounding Up The default value is Rounding Off.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[TaxGeoConfigShare](#) on page 67
Sharing is available for the object.

SEE ALSO:
[GeoCountry](#)

TaxPolicy

A tax policy contains a group of tax treatments, where each treatment represents parameters to determine how a particular product is taxed for a transaction line item. Tax policies are related to products, which pass the policy on to the resulting order items. When you activate an order, Subscription Management assigns a tax treatment to each order item based on the tax policy's DefaultTaxTreatmentId, then uses the tax treatment to calculate tax. This object is available in API version 55.0 and later.

Each tax policy requires at least one tax treatment. We recommend determining the taxation needs for each of your products and creating policies and treatments for each product accordingly. You can then assign your tax policies to the relevant products on your own or through automation.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
DefaultTaxTreatmentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description When you order a product, the order product receives this tax treatment. This field is a relationship field. Relationship Name DefaultTaxTreatment Relationship Type Lookup

Field	Details
	Refers To TaxTreatment
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Optional user-defined description for providing more information about the tax policy.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Optional user-defined name for the tax policy.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description To calculate tax for order products, products must have an active tax policy. Tax policies are created with a Draft status before being assigned to a product or order product. After activating a tax policy, you can't edit certain policy fields.

Field	Details
	Possible values are: • Active • Draft • Inactive
TreatmentSelection	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Defines how Subscription Management chooses a tax treatment to assign to order products related to this tax policy. In API version 55.0, only <code>Default</code> is supported. Possible values are: • <code>Default</code>—The order product receives the tax treatment defined in the tax policy's <code>DefaultTreatmentId</code> field. • <code>LegalEntity</code>—Assigns a tax treatment based on matching legal entities between the order product and tax treatment. • <code>Manual</code>—Order products don't receive tax treatments based on the tax policy; users must provide the treatment on their own instead.

TaxRate

Represents a tax rate for a tax code and country. This object is available in API version 56.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The `TaxRate` object is available if B2B Commerce or D2C Commerce is enabled.

Fields

Field	Details
GeoCountryId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort Description The ID of the GeoCountry for which the tax rate applies. You can define only one tax rate per GeoCountry and tax code combination. This field is a relationship field. Relationship Name GeoCountry Relationship Type Lookup Refers To GeoCountry
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible the user accessed data in this record or list view but didn't viewed it directly.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The unique ID of the tax rate.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description The TaxRate record owner. By default, the record owner is the user who created the record. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
Priority	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Reserved for future use.
Rate	Type double Properties Create, Filter, Sort, Update Description The tax percentage rate that will be applied to orders.
TaxCode	Type string Properties Create, Filter, Group, Sort Description The code used to calculate the tax rate for the invoice line.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[TaxRateChangeEvent](#) on page 68

Change events are available for the object.

[TaxRateFeed](#) on page 55

Feed tracking is available for the object.

[TaxRateHistory](#) on page 63

History is available for tracked fields of the object.

TaxRateOwnerSharingRule on page 65

Sharing rules are available for the object.

TaxRateShare on page 67

Sharing is available for the object.

TaxTreatment

A tax treatment contains details about how Salesforce and external engines calculate taxes, and the tax engine to use for tax calculation. The `IsTaxable` field determines whether tax is calculated for the product in the transaction. The tax code, tax engine, and product code are sent via API to the external tax calculation service. When you invoice an order item that has a tax treatment, the invoice line inherits the tax treatment from the order item's related billing schedule. The invoice line's `TaxCode` field is populated based on the code that the tax engine used for calculation. This object is available in API version 55.0 and later.

Each product requires a tax policy to determine whether to apply tax. The tax treatments determine how taxable products are taxed. Each tax policy requires at least one tax treatment. We recommend determining the taxation needs for each of your products and creating policies and treatments for each product accordingly. You can then assign your tax policies to the relevant products on your own or through automation.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available with Subscription Management and Billing (Revenue Cloud).

For information about this object that's available with Billing (Revenue Cloud), including its special access rules, see the [Revenue Cloud Developer Guide](#).

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Optional user-defined description for providing more information about the tax treatment.
IsTaxable	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Determines whether Subscription Management calculates tax for order items covered by the tax treatment. When this value is True, Subscription Management calls the CalculateTax API for the order item during order item creation. The default value is 'False'. This field is available when Subscription Management is enabled.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Optional user-defined name for the tax treatment.
ProductCode	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description Code of the product that the tax treatment applies to.
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description Status of the tax treatment. Possible values are: • Active • Draft • Inactive
TaxCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Reference code used when tax is calculated in an external tax engine.
TaxEngineId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The tax engine for the tax treatment. A tax engine represents both an instance of a tax engine provider as well as the merchant credentials for that specific instance. When Subscription Management begins the tax calculation process for an order item, it uses the tax engine from the order item's tax treatment. If the tax treatment's <code>IsTaxable</code> value is True, the treatment requires a tax engine. This field is a relationship field. This field is available when Subscription Management is enabled. Relationship Name TaxEngine Relationship Type Lookup Refers To TaxEngine
TaxPolicyId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The tax treatment's parent tax policy. A tax policy is a group of tax treatments, where each treatment represents a rule for how to invoice a customer for an order item. Tax policies are related to products, which pass the policy on to the resulting order items. When you activate

Field	Details
	an order, Subscription Management assigns a tax treatment to each order item based on the tax policy's DefaultTaxTreatmentId, then uses the tax treatment to calculate tax. This field is a relationship field. Relationship Name TaxPolicy Relationship Type Lookup Refers To TaxPolicy

TenantScrAIPrmptInjection

Stores generative AI prompt injection data. This object is available in API version 65.0 and later.

Supported Calls

describeSObjects(), getDeleted(), getUpdated(), query(), retrieve()

Special Access Rules

This object is available for Security Center subscribers. This object is read-only.

Fields

Field	Details
DetailIdentifier	Type string Properties Filter, Group, idLookup, Sort Description The ID of the individual detail record. This field is unique across all tenants.
InputSource	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The origin of this prompt.

Field	Details
Language	Type string Properties Filter, Group, Nillable, Sort Description Language of the prompt.
MaskedPrompt	Type textarea Properties Nillable Description Masked prompt or input text.
MaskedResponse	Type textarea Properties Nillable Description The generated response from the LLM. If masking is enabled, this may contain placeholder text.
MetricIdentifier	Type string Properties Filter, Group, Sort Description The ID of the type of metric that was counted. This field is unique within your organization.
MetricsType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of data collected.
Name	Type string Properties Filter, Group, idLookup, Sort

Field	Details
	Description The name of the metric for which data is being collected.
PlannerLlm	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The LLM being used by the Planner.
Prompt	Type textarea Properties Nillable Description The hydrated version of prompt text before data masking is applied. The actual prompt sent to the LLM will mask sensitive data if data masking is enabled.
PromptTimestamp	Type dateTime Properties Filter, Nillable, Sort Description Timestamp when this prompt injection happened.
PromptTokens	Type int Properties Filter, Group, Nillable, Sort Description The number of tokens used in the prompt.
Response	Type textarea Properties Nillable Description The generated response after unmasking.
Tenant	Type string

Field	Details
	Properties Filter, Group, idLookup, Sort
	Description The ID of the tenant with this triggered Transaction Security Policy event.
TenantName	Type string
	Properties Filter, Group, idLookup, Nillable, Sort
	Description The name of the tenant where this triggered Transaction Security Policy happened.

TenantSecret

This object stores an encrypted organization-specific key fragment that's used with the primary secret (KDF seed) to produce org-specific data encryption keys. This object is available in API version 34.0 and later.

You can rotate tenant secrets of the `Data` type once every four hours in a sandbox org or every 24 hours in production orgs. You can rotate tenant secrets of the `SearchIndex` type one time every seven days.



Note: This information is about Shield Platform Encryption and not Classic Encryption.

Supported Calls

`create()`, `query()`, `retrieve()`, `update()`

Fields

Field Name	Details
Description	Type textarea
	Properties Create, Nillable, Update
	Description The description of the tenant secret.
KeyDerivationMode	Type picklist
	Properties Create, Filter, Group, Restricted picklist, Sort

Field Name	Details
	Description The key derivation mode applied to customer-supplied key material. Modes are: PBKDF2 The customer-supplied key material is used by the Shield KMS to create a derived data encryption key. NONE The customer-supplied key material is used by the Shield KMS as the final data encryption key to directly encrypt and decrypt data. Available in API version 43.0 and later.
RemoteKeyCertificate	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the certificate whose public key is used to encrypt the <code>SecretValue</code> during a remote key callout. Available in API version 45.0 and later.
RemoteKeyIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort Description A unique key identifier for key material fetched from a remote key service. Available in API version 45.0 and later.
RemoteKeyServiceID	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The named credential used to fetch remote key material from a remote key service. Available in API version 45.0 and later.
SecretValue	Type base64 Properties Create, Nillable, Update

Field Name	Details
	Description The encrypted 256-bit secret value encoded in base64.
SecretValueCertificate	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The certificate needed to upload a customer-supplied tenant secret. Each certificate has a unique name.
SecretValueHash	Type base64 Properties Create Description The matching tenant secret hash for an uploaded customer-supplied tenant secret.
Source	Type picklist Properties Create, Default on create, Filter, Group, Restricted picklist, Sort Description The source of the encryption key material. Values are: HSM A Salesforce-generated tenant secret. Uploaded A customer-supplied tenant secret or data encryption key. Remote A tenant secret or data encryption key fetched from a key service outside of Salesforce. Available in API version 44.0 and later.Tenant secrets with a <code>Source</code> value of Remote are listed as Fetched on the Key Management page in Setup. Available in API version 43.0 and later.
Status	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort, Update

Field Name	Details
	Description The status of the tenant secret. Values are: Active Can be used to encrypt and decrypt new or existing data. Archived Can't encrypt new data. Can be used to decrypt data previously encrypted with this key when it was active. Destroyed Can't encrypt or decrypt data. Data encrypted with this key when it was active can no longer be decrypted. Files and attachments encrypted with this key can no longer be downloaded. You can update the <code>Status</code> field through the API in versions 44.0 or later.
Type	Type picklist Properties Create, Default on create, Filter, Group, Restricted picklist, Sort Description The type of tenant secret. The <code>Type</code> field is available in API version 39.0 and later. The following values appear in the <code>Type</code> picklist: • Analytics—CRM Analytics data (available in API version 39.0 and later). • Data—data stored in the Salesforce database. Includes data in encrypted fields, files, and attachments but not search index files. Tenant secrets created in API version 34.0 and later default to the <code>Data</code> type. • Database—transactional database including standard and custom fields, metadata, and Apex (available in API version 62.0 and later). • DeterministicData—data stored in the Salesforce database. Includes data in encrypted fields, files, and attachments, but not search index files (available in API version 39.0 and later). • EventBus—Change Data Capture event data (available in API version 43.0 and later). • SearchIndex—search index files (available in API version 39.0 and later). For Hyperforce orgs on API version 63.0 and later, create secrets of type <code>SearchIndex</code> with the DataEncryptionKey object. For Hyperforce orgs on API version 62.0 and earlier, and for all non-Hyperforce orgs, create secrets of type <code>SearchIndex</code> with the <code>TenantSecret</code> object.
Version	Type int Properties Filter, Group, idLookup, Sort

Field Name	Details
	Description The version number of this secret. The version number is unique within your org.

Usage

Use this object to create or update an org-specific tenant secret or customer-supplied key material.

Use your preferred developer environment to run the examples. Use the Salesforce developer [Introduction to REST API](#) for basic information on making REST calls into Salesforce. Also, the video [How To Use Salesforce APIs Collection With Postman](#) by Sudipta Deb provides step by step instructions on getting started using REST with Salesforce.

Example 1:

Build an automated tenant secret creation and activation solution similar to the following.

1. Start by creating an Apex class to create the tenant secret. Specify the value of the tenant secret to encrypt data of a particular type.

```
global class CreateNewSecret implements Schedulable {
    global void execute(SchedulableContext SC) {
        TenantSecret secret = new TenantSecret ();
        secret.description = 'Created new secret from scheduled job';
        secret.type= 'Database';
        insert secret;
    }
}
```



Note: Type is available in API version 39.0 and later. Type is optional; all tenant secrets default to the Data type.

2. Schedule the Apex class to run at the specified interval.

This Apex code only needs to be run a single time to schedule the job. This code runs the job every 90 days.

```
CreateNewSecret secret = new CreateNewSecret();
String schedule = '0 0 0 1 JAN,APR,JUL,OCT ?';
String jobID = system.schedule('Automated secret creation and activation', schedule,
secret);
```

3. Validate that the job is scheduled.
4. Validate that tenant secrets are created after the job is run.

Example 2

Upload a customer-supplied tenant secret.

1. Create a certificate that's compatible with customer-supplied key material. See [Generate a BYOK-Compatible Certificate](#) in Salesforce Help.

2. Then upload your matching key material and key material hash. Include the unique name of the compatible certificate. The key material is uploaded in encrypted form.

```
TenantSecret secret = new TenantSecret ();
secret.description = 'New uploaded secret';
secret.type= 'Data';
secret.SecretValue = ...
EncodingUtil.base64Decode('...');
secret.SecretValueCertificate = ...;
secret.SecretValueHash = ...
EncodingUtil.base64Decode('...');
insert secret;
```

You can use this [script to generate a customer-supplied tenant secret](#) and tenant secret hash.

3. Validate that the key material is uploaded.

Example 3

Opt out of key derivation on a key-by-key basis when you upload key material. When you upload your key material, specify 'Source':Uploaded and 'KeyDerivationMode': 'NONE', and set non-null values for the SecretValueCertificate, SecretValue, and SecretValueHash.

Example 4

Import a tenant secret of the Data type.

```
TenantSecret secret = [SELECT Id FROM TenantSecret WHERE Type = 'Data' AND Version = 2];
secret.SecretValue = "<previously_exported_secret_as_a_String>";
update secret;
```

Example 5

Export a tenant secret by writing the secret.SecretValue to a file. Here's an example that uses a tenant secret of the Data type.

```
TenantSecret secret = [SELECT SecretValue FROM TenantSecret WHERE Type = 'Data' AND Version = 2];
secret.SecretValue =...;
update secret;
```

Example 6

Destroy a tenant secret of the Data type.



Warning: Your tenant secret is unique to your organization and to the specific data to which it applies. When you destroy a tenant secret, related data isn't accessible unless you previously exported the key and then import the key back into Salesforce.

```
TenantSecret secret = [SELECT Id FROM TenantSecret WHERE Type = 'Data' AND Version = 2];
secret.SecretValue = NULL;
```



```
secret.Status = Destroyed;  
update secret;
```

Example 7

Change the `Status` of a tenant secret from `Archived` to `Destroyed`. Include the `SecretValue` and new tenant secret `Status`.

```
TenantSecret secret = [SELECT Id FROM TenantSecret WHERE Type = 'Data' AND Version = 2];  
secret.Status = Destroyed;  
update secret;
```

Cache-Only Key Service customers can change the `Status` of cache-only key tenant secrets. For example, reactivate a cache-only key by changing its `Status` from `Destroyed` to `Active`.

Example 8

Create a callout connection that fetches a cache-only key tenant secret from a key service outside of Salesforce.

1. Make sure that your org has at least one active Data in Salesforce key, either Salesforce-generated or customer-supplied. Then turn on Allow Cache-Only Keys with BYOK from the Advanced Settings page in Setup.
2. Create a certificate that's compatible with customer-supplied key material. See [Generate a BYOK-Compatible Certificate](#) in Salesforce Help.
3. [Create and assemble your key material.](#)
4. Create a named credential to serve as your authenticated callout mechanism. You can define your named credential through Setup or [directly with Apex](#). Specify a BYOK-compatible certificate and an HTTPS endpoint.
5. Configure the connection to your remote key service. This connection uses a named credential and its associated certificate to fetch a specified cache-only key tenant secret.

```
remote_params = { 'Source': 'Remote',  
  'RemoteKeyIdentifier': ...,  
  'RemoteKeyServiceId': ...,  
  'RemoteKeyCertificate': ...}  
  
sf.TenantSecret.create(remote_params)
```

SEE ALSO:

[System Fields](#)

TenantSecurityAlGtwyUsage

Stores Einstein generative AI gateway usage data. This object is available in API version 65.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is available for Security Center subscribers. This object is read-only.

Fields

Field	Details
Cloud	Type string Properties Filter, Group, idLookup, Nillable, Sort Description Cost cloud ID.
DetailIdentifier	Type string Properties Filter, Group, Sort Description The ID of the individual detail record. This field is unique across all tenants.
Feature	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The AI feature for which the gateway request was made.
MaskedPrompt	Type textarea Properties Nillable Description Masked prompt or input text.
MaskedResponse	Type textarea Properties Nillable Description The generated response from the LLM. If masking is enabled, this may contain placeholder text.

Field	Details
MetricIdentifier	Type string Properties Filter, Group, Sort Description The ID of the type of metric that was counted. This field is unique within your organization.
MetricsType	Type string Properties Filter, Group, Nillable, Sort Description The type of data collected.
Model	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the model to which the request was sent.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the metric for which data is being collected.
ObjectName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description Name of the Salesforce object is referenced in the prompt.
Prompt	Type textarea Properties Nillable

Field	Details
	Description The hydrated version of prompt text before data masking is applied. The actual prompt sent to the LLM will mask sensitive data if data masking is enabled.
PromptTemplateDevName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The ID of the prompt template.
PromptTemplateVersionNo	Type string Properties Filter, Group, Nillable, Sort Description The version of the prompt template.
PromptTokens	Type int Properties Filter, Group, idLookup, Nillable, Sort Description The number of tokens used in the prompt.
Response	Type textarea Properties Nillable Description The generated response after unmasking.
Tenant	Type string Properties Filter, Group, idLookup, Sort Description The ID of the tenant of this AI gateway usage event.
TenantName	Type string

Field	Details
	Properties Filter, Group, idLookup, Nillable, Sort
	Description The name of the tenant of this AI gateway usage event.

TenantSecurityAlertRuleSelectedTenant

Stores information about a Security Center alert rule for tenants. This object is available for Security Center subscribers in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is read-only.

Fields

Field	Details
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description The name of the metric for the data collected.
NotificationRuleIdentifier	Type string
	Properties Create, Filter, Group, Sort, Update
	Description The ID of the corresponding TenantSecurityNotificationRule.
Tenant	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update

Field	Details
	Description The ID of the tenant (org) that this record is for.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

TenantSecurityAlertRuleSelectedTenantChangeEvent on page 68

Change events are available for the object.

TenantSecurityAlertRuleSelectedTenantFeed on page 55

Feed tracking is available for the object.

TenantSecurityAlertRuleSelectedTenantHistory on page 63

History is available for tracked fields of the object.

TenantSecurityAlertRuleSelectedTenantOwnerSharingRule on page 65

Sharing rules are available for the object.

TenantSecurityAlertRuleSelectedTenantShare on page 67

Sharing is available for the object.

TenantSecurityApiAnomaly

Stores detected anomalies in how users typically make API calls. For more information, see [Threat Detection](#). This object is available to Security Center subscribers in API version 53.0 and later.

 **Note:** Threat Detection is available only for Event Monitoring subscribers.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is read-only.

Fields

Field	Details
<code>DetailIdentifier</code>	Type string Properties Filter, Group, idLookup, Sort

Field	Details
	Description The ID of the individual detail record. This field is unique within your org.
EventDate	Type dateTime Properties Filter, Nillable, Sort Description The time when the anomaly was reported. For example, 2020-01-20T19:12:26.965Z. The most granular setting is milliseconds.
EventIdentifier	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The unique ID of the event, which is shared with the corresponding storage object.
EventName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the event, which is Api Anomaly.
MetricIdentifier	Type string Properties Filter, Group, Sort Description The ID of the type of metric that was counted.
MetricsType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of data collected.
Name	Type string

Field	Details
	Properties Filter, Group, idLookup, Sort Description The name of the metric for the data collected.
Operation	Type string Properties Filter, Group, Nillable, Sort Description The API call that generated the event. For example, Query.
QueriedEntities	Type textarea Properties Nillable Description The type of entities associated with the event.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events.
RowsProcessed	Type double Properties Filter, Nillable, Sort Description Total row count for the current operation.
Score	Type double Properties Filter, idLookup, Nillable, Sort Description A number from 0 through 100 that represents the anomaly score for the API execution or export tracked by this event. The anomaly score shows how the current API activity differs from the user's typical activity. A low score indicates that the user's current API activity is similar to the usual activity, and a high score indicates that it's different.

Field	Details
SecurityEventData	Type textarea Properties Nillable Description The set of features about the API activity that triggered this anomaly event. For example, a user typically downloads 10 accounts at a time but then deviates from that pattern and downloads 1,000 accounts. This event is triggered, and the contributing features are captured in this field. Potential features include row count, column count, average row size, day of week, and the browser's user agent used for the report activity. The data captured also shows how much as a percentage that the feature contributed to triggering this anomaly event. The data is in JSON format.
Summary	Type textarea Properties Nillable Description A text summary of the API anomaly that caused this event.
Tenant	Type string Properties Filter, Group, idLookup, Sort Description The ID of the tenant that was targeted in the event.
TenantName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the tenant that was targeted in the event.
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: /home/home.jsp.

Field	Details
UserAgent	Type textarea Properties Nillable Description UserAgent used in the HTTP request, post-processed by the server.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The origin user's unique ID.
Username	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The origin username in the format of user@company.com at the time that the event was created.

Associated Objects

This object has these associated objects. If the API version isn't specified, it's available in the same API versions as this object. Otherwise, it's available in the specified API version and later.

[TenantSecurityApiAnomalyChangeEvent](#) on page 68

Change events are available for the object.

[TenantSecurityApiAnomalyFeed](#) on page 55

Feed tracking is available for the object.

[TenantSecurityApiAnomalyHistory](#) on page 63

History is available for tracked fields of the object.

[TenantSecurityApiAnomalyOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[TenantSecurityApiAnomalyShare](#) on page 67

Sharing is available for the object.

TenantSecurityCertificate

Stores metric details related to public key certificate information. The certificate binds the public key to the identity of an entity. This object is available in API version 63.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is read only.

Fields

Field	Details
Action	Type String Properties Filter, Group, idLookup, Nillable, Sort Description The action taken on this certificate. Possible values are: • Added • Removed • Updated
ActionBy	Type String Properties Filter, Group, idLookup, Nillable, Sort Description The user who made this change.
ActionDate	Type dateTime Properties Filter, Nillable, Sort Description The date this action was taken.
CertCreatedDate	Type dateTime Properties Filter, Nillable, Sort Description When this certificate was created.

Field	Details
DetailIdentifier	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The ID of the individual detail record. This field is unique within your organization.
ExpirationDate	Type dateTime Properties Filter, Nillable, Sort Description When this certificate expires.
IsActive	Type boolean Properties Filter, Group, Sort Description Indicates whether this certificate is active.
IsCaSigned	Type boolean Properties Filter, Group, Sort Description Indicates whether this certificate is signed by the issuer (true) or not (false).
IsPlatformEncrypted	Type boolean Properties Filter, Group, Sort Description Whether this certificate is encrypted with Platform Encryption.
IsPrivateKeyExportable	Type boolean Properties Filter, Group, Sort Description Indicates whether this certificate's private key is exportable.

Field	Details
KeySize	Type string Properties Filter, Group, Nillable, Sort Description The length of the public key.
MetricIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the type of metric that was counted. This field is unique within your organization.
MetricsType	Type picklist Properties Filter, Group, Sort Description The type of data being collected.
Name	Type string Properties Filter, Group, idLookup, Sort Description A user-friendly name for the certificate.
Tenant	Type string Properties Filter, Group, idLookup, Sort Description The ID of the tenant with this certificate.
TenantName	Type string Properties Filter, Group, idLookup, Sort Description The name of the tenant with this certificate.

TenantSecurityConnectedApp

Stores the details for a connected app that was added to or removed from a Security Center tenant. This object is available to Security Center subscribers in API version 53.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object can only be read and queried.

Fields

Field	Details
Action	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The action taken on the connected app within a tenant. Possible values are: • ADDED • REMOVED • UPDATED
ActionBy	Type string Properties Filter, Group, Nillable, Sort Description The user who performed the action on the connected app.
ActionDate	Type dateTime Properties Filter, Nillable, Sort Description The date that the action was taken.

Field	Details
AppName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the connected app.
AuthorizedBy	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The user who authorized the connected app to be installed.
AuthorizedDate	Type dateTime Properties Filter, Nillable, Sort Description The date that the connected app was authorized for installation.
DetailIdentifier	Type string Properties Filter, Group, idLookup, Sort Description The ID of the individual detail record. This field is unique within your org.
LastUsedDate	Type dateTime Properties Filter, Nillable, Sort Description The last date that the connected app was used for authentication.
MetricIdentifier	Type string Properties Filter, Group, Sort Description The ID of the type of metric that was counted.

Field	Details
MetricsType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of data being collected.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the metric for which data is being collected.
Publisher	Type string Properties Filter, Group, Nillable, Sort Description Represents if the relevant tenant is the original publisher of the connected app for all connected tenants in the org.
Scope	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The scope or scopes assigned to the connected app. A scope defines the type of protected resource that the connected app can access.
Tenant	Type string Properties Filter, Group, idLookup, Sort Description The ID of the relevant tenant.
TenantName	Type string Properties Filter, Group, idLookup, Nillable, Sort

Field	Details
	Description The name of the tenant that the connected app is connected to.
Version	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The current version of the connected app.

Associated Objects

This object has these associated objects. If the API version isn't specified, it's available in the same API versions as this object. Otherwise, it's available in the specified API version and later.

[TenantSecurityConnectedAppChangeEvent](#) on page 68

Change events are available for the object.

[TenantSecurityConnectedAppFeed](#) on page 55

Feed tracking is available for the object.

[TenantSecurityConnectedAppHistory](#) on page 63

History is available for tracked fields of the object.

[TenantSecurityConnectedAppOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[TenantSecurityConnectedAppShare](#) on page 67

Sharing is available for the object.

TenantSecurityConfigAgent

Stores metric details related to implemented Agentforce Agents This object is available in API version 65.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is available for Security Center subscribers. This object is read-only.

Fields

Field	Details
Action	Type string Properties Filter, Group, Nillable, Sort Description The action taken on the configured agent within a tenant.
ActionBy	Type string Properties Filter, Group, Nillable, Sort Description The user who made this change.
ActionDate	Type dateTime Properties Filter, Nillable, Sort Description The date this action was taken.
AgentName	Type string Properties Filter, Group, Nillable, Sort Description The name of the configured agent.
AgentType	Type string Properties Filter, Group, Nillable, Sort Description The type of agent.
AssignedTopics	Type textarea Properties Nillable

Field	Details
	Description The list of agent topics.
DetailIdentifier	Type string Properties Filter, Group, idLookup, Sort Description The ID of the individual detail record. This field is unique across all tenants.
MetricIdentifier	Type string Properties Filter, Group, Sort Description The ID of the type of metric that was counted. This field is unique within your organization.
MetricsType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of data collected.
Name	Type string Properties Filter, Group, idLookup, Sort Description The API name of the agent.
Status	Type string Properties Filter, Group, Nillable, Sort Description The status, active or inactive, of the agent version.
Tenant	Type string Properties Filter, Group, idLookup, Sort

Field	Details
	Description The ID of the tenant.
TenantName	Type string Properties Filter, Group, Nillable, Sort Description The name of the tenant.
Version	Type int Properties Filter, Group, Nillable, Sort Description The version number.

TenantSecurityCredentialStuffing

Stores when a user successfully logs in to Salesforce during an identified credential stuffing attack. For more information, see [Threat Detection](#). This object is available to Security Center subscribers in API version 53.0 and later.

 **Note:** Threat Detection is available only for Event Monitoring subscribers.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is read-only.

Fields

Field	Details
AcceptLanguage	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description List of HTTP headers that specify the natural language, such as English, that the client understands.
DetailIdentifier	Type string Properties Filter, Group, idLookup, Sort Description The ID of the individual detail record. This field is unique within your org.
EventDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the hijacking event was reported. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
EventIdentifier	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The unique ID of the event.
EventName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the event, which is Credential Stuffing.
LoginType	Type string Properties Filter, Group, Nillable, Sort Description The type of login used to access the session. For the list of possible values, see the LoginType field of LoginHistory in the Object Reference.

Field	Details
LoginUrl	Type string Properties Filter, Group, Nillable, Sort Description The URL of the login page. For example, <code>login.salesforce.com</code>.
MetricIdentifier	Type string Properties Filter, Group, Sort Description The ID of the type of metric that was counted.
MetricsType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of data collected.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the metric for the data collected.
Score	Type double Properties Filter, idLookup, Nillable, Sort Description Indicates that a user successfully logged in to Salesforce during an identified credential stuffing attack. The value of this field is always 1.
Summary	Type textarea Properties Nillable

Field	Details
	Description A summary of the threat that caused this event to be created.
Tenant	Type string Properties Filter, Group, idLookup, Sort Description The ID of the tenant that was targeted in the event.
TenantName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the tenant that was targeted in the event.
UserAgent	Type textarea Properties Nillable Description UserAgent used in the HTTP request, post-processed by the server.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The origin user's unique ID.
Username	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The origin username in the format of user@company.com at the time the event was created.

Associated Objects

This object has these associated objects. If the API version isn't specified, it's available in the same API versions as this object. Otherwise, it's available in the specified API version and later.

TenantSecurityCredentialStuffingChangeEvent on page 68

Change events are available for the object.

TenantSecurityCredentialStuffingFeed on page 55

Feed tracking is available for the object.

TenantSecurityCredentialStuffingHistory on page 63

History is available for tracked fields of the object.

TenantSecurityCredentialStuffingOwnerSharingRule on page 65

Sharing rules are available for the object.

TenantSecurityCredentialStuffingShare on page 67

Sharing is available for the object.

TenantSecurityCustomMetricSetup

Represents the configuration for a custom metric within Security Center. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
CustomMetricIdentifier	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The unique identifier for the custom metric.
CustomObjectIdentifier	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The unique identifier for the custom object for this custom metric.

Field	Details
CustomObjectName	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The unique name of the custom object for this custom metric.
DiffFieldIdentifierList	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The list of fields that were selected for <code>Diff</code> display.
DisplayFieldIdentifierList	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The list of fields that were selected for display.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the custom metric.
MetricDisplayType	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The display type for this metric. For example, <code>diff</code> or <code>non-diff</code>.
MetricGroup	Type string Properties Create, Filter, Group, Sort, Update

Field	Details
	Description The category of the custom metric. Some category examples include Authentication and Configuration.
MetricName	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the custom metric. The MetricName and Name fields have the same value.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the custom metric. The MetricName and Name fields have the same value.

TenantSecurityCustomMetricDetail

Stores TenantSecurityCustomMetricStat drill down details. This object is available in API version 62.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is read-only.

Fields

Field	Details
Action	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Whether the metric detail record was added, updated, or removed.

Field	Details
ActionBy	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The user who performs the action.
ActionDate	Type dateTime Properties Create, Filter, Group, idLookup, Sort, Update Description When this change was made.
CustomObjectIdentifier	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description A virtual foreign key reference to a Custom Object in which the metric details are stored.
DiffFieldValueListHash	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The hash of custom metric <code>diff</code> fields value.
FieldValueListHash	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The hash of custom metric fields value.
MetricStatIdentifier	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description A virtual foreign key reference to TenantSecurityCustomMetricStat.

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The Custom Object Api Name associates to the custom metric.

TenantSecurityCustomMetricStat

Represents custom metric data within Security Center. This object is available in API version 61.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is read-only.

Fields

Field	Details
ChangeCount	Type int Properties Filter, Group, Nillable, Sort Description The number of times this metric was changed.
CustomMetricIdentifier	Type string Properties Filter, Group, idLookup, Sort Description The ID of the custom metric.
EndProcessTime	Type dateTime

Field	Details
	Properties Filter, Sort Description The end time of the metric being processed.
MetricCount	Type int Properties Filter, Group, Sort Description The number of times this metric was recorded.
MetricIdentifier	Type string Properties Filter, Group, idLookup, Sort Description The unique identifier of the metric.
MetricName	Type string Properties Filter, Group, idLookup, Sort Description The name of the metric.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the custom metric.
PreviousMetricIdentifier	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The previous unique identifier of this metric.
StartProcessTime	Type dateTime

Field	Details
	Properties Filter, Sort Description The start time of the metric being processed.
Tenant	Type string Properties Filter, Group, Sort Description The ID of the tenant with the custom metric.

TenantSecurityEncryptedField

Represents fields encrypted under your Shield Platform Encryption policy. This object is available in API version 61.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is read-only.

Fields

Field	Details
Action	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The action taken on the encryption policy within a tenant. Possible values are: - Added - Removed - Updated
ActionBy	Type string

Field	Details
	Properties Filter, Group, idLookup, Nillable, Sort Description This field is reserved for future use.
ActionDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the change to the tenant encryption policy status was made.
DetailIdentifier	Type string Properties Filter, Group, idLookup, Sort Description Unique identifier for this detail record.
EncryptionType	Type string Properties Filter, Group, Nillable, Sort Description The type of encryption for the field.
FieldName	Type string Properties Filter, Group, Nillable, Sort Description The name of the encrypted field.
FieldType	Type string Properties Filter, Group, Nillable, Sort Description The type of field being encrypted.
MetricIdentifier	Type string

Field	Details
	Properties Filter, Group, Sort Description The ID of the type of metric that was counted. This field is unique within your organization.
MetricsType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of encryption policy collected by this metric.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the metric for the data collected.
ObjectName	Type string Properties Filter, Group, Nillable, Sort Description The name of the object for this encrypted field.
Tenant	Type string Properties Filter, Group, idLookup, Sort Description The ID of the tenant with Shield Encryption.
TenantName	Type string Properties Filter, Group, Nillable, Sort Description The name of the tenant that this record is for.

TenantSecurityGuestUserAnomaly

Represents metric details for guest user anomaly events detected by Threat Detection. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is read-only.

Fields

Field	Details
<code>DetailIdentifier</code>	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The unique identifier for this detail record.
<code>EventDate</code>	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The time when the anomaly was reported. For example, 2020-01-20T19:12:26.965Z. The most granular setting is milliseconds.
<code>EventIdentifier</code>	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The unique ID of the event, which is shared with the corresponding storage object.
<code>EventName</code>	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update

Field	Details
	Description The name of the event.
MetricIdentifier	Type string Properties Create, Filter, Group, Sort, Update Description The ID of the type of metric counted. This field is unique within your organization.
MetricsType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of data collected.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the metric for the data collected.
RequestedObjects	Type textarea Properties Create, Nillable, Update Description The objects requested by the customers.
Score	Type double Properties Create, Filter, idLookup, Nillable, Sort, Update Description Specifies how significantly the guest user behavior deviates from the other guest users. It is formatted as a number between 0 and 1.
SoqlCommands	Type textarea

Field	Details
	Properties Create, Nillable, Update Description SOQL commands run by the guest user.
Summary	Type textarea Properties Create, Nillable, Update Description A text summary of the anomaly that caused this event.
Tenant	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The ID of the tenant that was targeted in the event.
TenantName	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The name of the tenant that was targeted in the event.
TotalControllerEvents	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The number of times controllers were triggered.
UserAgent	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description User Agent for this event.
UserIdentifier	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The origin user's unique ID.
UserId	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Type of user of this event. For example, a guest user.
Username	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The origin username in the format of <code>user@company.com</code> at the time the event was created.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[TenantSecurityGuestUserAnomalyChangeEvent](#) on page 68

Change events are available for the object.

[TenantSecurityGuestUserAnomalyFeed](#) on page 55

Feed tracking is available for the object.

[TenantSecurityGuestUserAnomalyHistory](#) on page 63

History is available for tracked fields of the object.

[TenantSecurityGuestUserAnomalyOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[TenantSecurityGuestUserAnomalyShare](#) on page 67

Sharing is available for the object.

TenantSecurityEncryptionPolicy

Stores tenant encryption policy status. This object is available in API version 58.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is read-only.

Fields

Field	Details
Action	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The action taken on the encryption policy within a tenant. Possible values are: • Added • Removed • Updated
ActionBy	Type string Properties Filter, Group, idLookup, Nillable, Sort Description This field is reserved for future use.
ActionDate	Type dateTime Properties Filter, Nillable, Sort Description When the change to the tenant encryption policy status was made.
DetailIdentifier	Type string Properties Filter, Group, idLookup, Sort Description Unique identifier for this detail record.

Field	Details
MetricIdentifier	Type string Properties Filter, Group, Sort Description The ID of the type of metric that was counted. This field is unique within your organization.
MetricsType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of encryption policy collected by this metric.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the metric for the data collected.
PolicyName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the policy.
PolicyStatus	Type int Properties Filter, Group, idLookup, Nillable, Sort Description Status of the policy. Possible values are: • -1—No license. • 0—Not Enabled. • -1—Enabled
Tenant	Type string

Field	Details
	Properties Filter, Group, idLookup, Sort Description The ID of the tenant with Shield Encryption.
TenantName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the tenant that this record is for.

TenantSecurityFeature

Stores org features across all tenants in Security Center. This object is available in API version 57.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is read-only.

Fields

Field	Details
DetailIdentifier	Type string Properties Filter, Group, idLookup, Sort Description The ID of the individual detail record. This field is unique across all tenants.
FeatureDescription	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The description of the feature.
FeatureName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the feature.
IsEnabled	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the feature is enabled or disabled. The default value is <code>false</code> .
MetricIdentifier	Type string Properties Filter, Group, Sort Description The ID of the type of metric counted. This field is unique within your organization.
MetricsType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of feature collected by this metric.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the feature for which data is being collected.
Tenant	Type string

Field	Details
	Properties Filter, Group, idLookup, Sort
	Description The ID of the tenant where the feature was applied.
TenantName	Type string
	Properties Filter, Group, Nillable, Sort
	Description The name of the connected tenant where the feature was enabled or disabled.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[TenantSecurityFeatureChangeEvent](#) on page 68

Change events are available for the object.

[TenantSecurityFeatureFeed](#) on page 55

Feed tracking is available for the object.

[TenantSecurityFeatureHistory](#) on page 63

History is available for tracked fields of the object.

[TenantSecurityFeatureOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[TenantSecurityFeatureShare](#) on page 67

Sharing is available for the object.

TenantSecurityHealthCheckBaselineTrend

Stores metric details related to Health Check baseline settings. The Health Check detail page in Security Center displays scores and settings for all your tenants in one place. Use this object to get details about which metrics are collected and for which tenants, and changes made to the Health Check baseline. This object is available to Security Center subscribers in API version 54.0 and later.

Supported Calls

```
create(), delete(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(),  
undelete(), update(), upsert()
```

Special Access Rules

This object is read-only.

Fields

Field	Details
Action	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The type of action. For example, added, updated, or removed.
ActionBy	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The user or admin that made the change.
ActionDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time of the change.
ApiName	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The name of the metric used by the API and managed packages.
BaselineDescription	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description For custom baselines, the name of the custom baseline file.
BaselineIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The ID of the baseline.
BaselineName	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The name of the baseline.
DetailIdentifier	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The ID of the individual detail record. This field is unique across all tenants.
IsDefault	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Whether the baseline is default or custom. The default is <code>false</code> .
MetricIdentifier	Type string Properties Create, Filter, Group, Sort, Update Description The ID of the type of metric collected.
MetricsType	Type string Properties Create, Filter, Group, Sort, Update Description The type of data collected. For example, SecurityHealthCheckBaselineMetric.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update

Field	Details
	Description The name of the metric for the data collected.
Tenant	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The ID of the tenant that was scored by the Security Health Check.
TenantName	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The name of the tenant that was scored by the Security Health Check.

Associated Objects

This object has these associated objects. If the API version isn't specified, it's available in the same API versions as this object. Otherwise, it's available in the specified API version and later.

[TenantSecurityHealthCheckBaselineTrendChangeEvent](#) on page 68

Change events are available for the object.

[TenantSecurityHealthCheckBaselineTrendFeed](#) on page 55

Feed tracking is available for the object.

[TenantSecurityHealthCheckBaselineTrendHistory](#) on page 63

History is available for tracked fields of the object.

[TenantSecurityHealthCheckBaselineTrendOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[TenantSecurityHealthCheckBaselineTrendShare](#) on page 67

Sharing is available for the object.

TenantSecurityHealthCheckDetail

Stores the details of Health Check scores for a connected tenant. The Health Check detail page in Security Center displays scores and settings for all your tenants in one place. Use this object to get settings and risks per tenant on a selected date. This object is available to Security Center subscribers in API version 53.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is read-only.

Fields

Field	Details
HealthCheckSettingIdentifier	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The ID of the Health Check setting. This field is unique within your org.
HealthCheckTrendKey	Type string Properties Filter, Group, Nillable, Sort Description The ID of the Health Check trend related to the Health Check detail records.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the tenant that was scored.
OrgValue	Type string Properties Filter, Group, Nillable, Sort Description The org's value for the security setting.
RiskType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The level of risk of the org's security setting value. Possible values are:

Field	Details
	• HIGH_RISK • MEDIUM_RISK • MEETS_STANDARD
Setting	Type string Properties Filter, Group, Nillable, Sort Description The name of the security setting. For example, Minimum Password Length.
SettingGroup	Type string Properties Filter, Group, Nillable, Sort Description The name of the security setting group in Setup that this setting is in. For example, Password Policies.
SettingRiskCategory	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The level of risk of the org's security settings. Possible values are: • HIGH_RISK • INFORMATIONAL • LOW_RISK • MEDIUM_RISK
StandardValue	Type string Properties Filter, Group, Nillable, Sort Description The recommended standard value for the security setting.
Tenant	Type string

Field	Details
	Properties Filter, Group, Sort
	Description The ID of the tenant that was scored.

Associated Objects

This object has these associated objects. If the API version isn't specified, it's available in the same API versions as this object. Otherwise, it's available in the specified API version and later.

TenantSecurityHealthCheckDetailChangeEvent on page 68

Change events are available for the object.

TenantSecurityHealthCheckDetailFeed on page 55

Feed tracking is available for the object.

TenantSecurityHealthCheckDetailHistory on page 63

History is available for tracked fields of the object.

TenantSecurityHealthCheckDetailOwnerSharingRule on page 65

Sharing rules are available for the object.

TenantSecurityHealthCheckDetailShare on page 67

Sharing is available for the object.

TenantSecurityHealthCheckTrend

Stores the history of Security Health Check scores for a connected tenant within Security Center. Health Check in Security Center displays Health Check scores and the average risk settings for all your tenants in one place. This object belongs to the parent tenant and stores Health Check data pushed from child tenants. This object is available for Security Center subscribers in API version 53.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is read-only.

Fields

Field	Details
Baseline	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The definition of an org's security settings standards.
HighRisk	Type int Properties Filter, Group, Sort Description Indicates that fields with this picklist value contain data highly sensitive to your company.
Informational	Type int Properties Filter, Group, Sort Description Indicates that fields with this picklist value contain data that isn't sensitive for your company.
LowRisk	Type int Properties Filter, Group, Sort Description Indicates that fields with this picklist value contain data with low sensitivity for your company.
MediumRisk	Type int Properties Filter, Group, Sort Description Indicates that fields with this picklist value contain data with moderate sensitivity for your company.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the tenant that was scored.

Field	Details
ProcessedTime	Type dateTime Properties Filter, Nillable, Sort Description The time when the Health Check score was calculated.
Score	Type double Properties Filter, Sort Description The summary score that shows how your org measures against a security baseline.
ScoreDelta	Type double Properties Filter, Nillable, Sort Description The percentage amount that the Health Check score changed.
Tenant	Type string Properties Filter, Group, Sort Description The ID of the tenant that was scored.
TenantOriginalIdentifier	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The ID of the Health Check Trend record for a tenant. This field is unique within your org.

Associated Objects

This object has these associated objects. If the API version isn't specified, it's available in the same API versions as this object. Otherwise, it's available in the specified API version and later.

[TenantSecurityHealthCheckTrendChangeEvent](#) on page 68

Change events are available for the object.

TenantSecurityHealthCheckTrendFeed on page 55

Feed tracking is available for the object.

TenantSecurityHealthCheckTrendHistory on page 63

History is available for tracked fields of the object.

TenantSecurityHealthCheckTrendOwnerSharingRule on page 65

Sharing rules are available for the object.

TenantSecurityHealthCheckTrendShare on page 67

Sharing is available for the object.

TenantSecurityLicense

Stores license usage information within Security Center. This object is available in API version 59.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is available only for Security Center subscribers. This object is read-only.

Fields

Field	Details
Action	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The type of change made to the license. Possible values are: • ADDED • REMOVED • UPDATED
ActionDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when this change was made.

Field	Details
DetailIdentifier	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The unique identifier for this detail record.
ExpirationDate	Type dateTime Properties Filter, Nillable, Sort Description The date on which this license expires.
MetricIdentifier	Type string Properties Filter, Group, Sort Description The ID of the corresponding TenantSecurityMonitorMetric.
MetricsType	Type string Properties Filter, Group, Nillable, Sort Description The type of license collected by this metric.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the license.
Status	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The status of the license.

Field	Details
Tenant	Type string Properties Filter, Group, idLookup, Sort Description The ID of the tenant with this license.
TenantName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the tenant with this license.
TotalLicenses	Type int Properties Filter, Group, idLookup, Nillable, Sort Description The total number of licenses.
UsedLicenses	Type int Properties Filter, Group, idLookup, Nillable, Sort Description The number of used licenses.
UsedLicensesLastUpdated	Type dateTime Properties Filter, Nillable, Sort Description The date that the used licenses were last updated for this tenant.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[TenantSecurityLicenseChangeEvent](#) on page 68

Change events are available for the object.

TenantSecurityLicenseFeed on page 55

Feed tracking is available for the object.

TenantSecurityLicenseHistory on page 63

History is available for tracked fields of the object.

TenantSecurityLicenseOwnerSharingRule on page 65

Sharing rules are available for the object.

TenantSecurityLicenseShare on page 67

Sharing is available for the object.

TenantSecurityLogin

Stores the login details of a single user to a tenant, grouped by date and type. You can query this object to find out how many times the user logged in to a specific tenant using a specific login type (for example, username/password or SSO). This object is available to Security Center subscribers in API version 53.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is read-only.

Fields

Field	Details
DetailIdentifier	Type string Properties Filter, Group, idLookup, Sort Description The ID of the individual detail record. This field is unique within your org.
LastLoginDate	Type dateTime Properties Filter, Nillable, Sort Description The last time the user logged in.
LoginCount	Type int

Field	Details
	Properties Filter, Group, idLookup, Nillable, Sort Description The number of times the user has logged in to the tenant.
MetricIdentifier	Type string Properties Filter, Group, Sort Description The ID of the type of metric that was counted.
MetricsType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of data collected. The supported metric types are: • LOGIN_PWLESS • LOGIN_PWLESS2FA • LOGIN_UNPW • LOGIN_UNPW2FA • LOGIN_SSO • LOGIN_SSO2FA • LOGIN_OAUTH • LOGIN_OAUTH2FA
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the metric for which data is being collected.
Tenant	Type string Properties Filter, Group, idLookup, Sort

Field	Details
	Description The ID of the tenant that was scored.
TenantName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the tenant that was scored.
UserEmail	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The email address of the user.
Username	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The user's org username.

Associated Objects

This object has these associated objects. If the API version isn't specified, it's available in the same API versions as this object. Otherwise, it's available in the specified API version and later.

[TenantSecurityLoginChangeEvent](#) on page 68

Change events are available for the object.

[TenantSecurityLoginFeed](#) on page 55

Feed tracking is available for the object.

[TenantSecurityLoginHistory](#) on page 63

History is available for tracked fields of the object.

[TenantSecurityLoginOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[TenantSecurityLoginShare](#) on page 67

Sharing is available for the object.

TenantSecurityLoginIpRangeTrend

Stores details of changes related to login IP ranges in Security Center. This object is available in API version 59.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is available only for Security Center subscribers. This object is read-only.

Fields

Field	Details
Action	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The type of change made to the login IP range. Possible values are: - ADDED - REMOVED - UPDATED
ActionBy	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the person who made this change.
ActionDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when this change was made.
Description	Type string

Field	Details
	Properties Filter, Group, idLookup, Nillable, Sort Description The description of the login IP range record.
DetailIdentifier	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The unique identifier for this detail record.
IpEndAddress	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The end IP address of the login IP range. For example, 10.0.0.0 – 10.255.255.255.
IpRangeIdentifier	Type string Properties Filter, Group, idLookup, Nillable, Sort Description Unique identifier of the IP range.
IpStartAddress	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The start IP address of the login IP range. For example, 10.0.0.0 – 10.255.255.255.
MetricIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the corresponding TenantSecurityMonitorMetric.
MetricsType	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The type of metric for the data collected.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the metric for the data collected.
ProfileIdentifier	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The ID of the profile that is assigned to this login IP range.
ProfileName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the profile that is assigned to this login IP range.
Tenant	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The ID of the tenant (org) that this record is for.
TenantName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the tenant (org) that this record is for.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

TenantSecurityLoginIpRangeTrendChangeEvent on page 68

Change events are available for the object.

TenantSecurityLoginIpRangeTrendFeed on page 55

Feed tracking is available for the object.

TenantSecurityLoginIpRangeTrendHistory on page 63

History is available for tracked fields of the object.

TenantSecurityLoginIpRangeTrendOwnerSharingRule on page 65

Sharing rules are available for the object.

TenantSecurityLoginIpRangeTrendShare on page 67

Sharing is available for the object.

TenantSecurityMobilePolicyTrend

Stores metrics related to changes in mobile security policies across all tenants in Security Center. This object is available to Security Center subscribers in API version 54.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object can only be read and queried.

Fields

Field	Details
Action	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The change made to the mobile security policy. For example, a new policy was added, updated, or removed.
ActionBy	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update

Field	Details
	Description The user who made the change.
ActionDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time of the mobile security policy change.
ConnectedApp	Type string Properties Filter, Group, Nillable, Sort Description The app that is associated with the mobile security policy.
DetailIdentifier	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The ID of the individual detail record. This field is unique across all tenants.
EffectiveDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date a mobile security policy is enforced.
IsEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description A value indicating whether the mobile security policy is enabled. The default is <code>false</code> , which means policies are disabled.
MetricIdentifier	Type string

Field	Details
	Properties Create, Filter, Group, Sort, Update Description The foreign key of the metric.
MetricsType	Type string Properties Create, Filter, Group, Sort, Update Description The type of mobile security policy data collected.
MobilePlatform	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The mobile operating system of the mobile security policy.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the metric for which data is collected.
PolicyType	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The type of mobile security policy. For example, Block Calendar.
RuleValue	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The value of the security notification rule.
RuleValueType	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The type of rule value. For example, boolean or text.
SeverityLevel	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The severity level of the security threat. For example, CRITICAL.
Tenant	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The ID of the tenant.
TenantName	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The name of the tenant.

Associated Objects

This object has these associated objects. If the API version isn't specified, it's available in the same API versions as this object. Otherwise, it's available in the specified API version and later.

[TenantSecurityPackageChangeEvent](#) on page 68

Change events are available for the object.

[TenantSecurityPackageFeed](#) on page 55

Feed tracking is available for the object.

[TenantSecurityPackageHistory](#) on page 63

History is available for tracked fields of the object.

[TenantSecurityPackageOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[TenantSecurityPackageShare](#) on page 67

Sharing is available for the object.

TenantSecurityMonitorMetric

Stores the daily count and daily count change for a metric within Security Center. This object is available to Security Center subscribers in API version 53.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is read-only.

Fields

Field	Details
ChangeCount	Type int Properties Filter, Group, Nillable, Sort Description How much the relevant metric changed.
Count	Type int Properties Filter, Group, Sort Description The current metric count.
EndProcessTime	Type dateTime Properties Filter, Sort Description The date and time that the metric count process ended.
MetricIdentifier	Type string Properties Filter, Group, idLookup, Nillable, Sort

Field	Details
	Description The ID of the type of metric counted. This field is unique within your organization.
MetricsType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of data collected.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the tenant.
PreviousMetricIdentifier	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The previous ID of the type of metric that was counted. This field is unique within your organization.
StartProcessTime	Type dateTime Properties Filter, Sort Description The date and time that the metric count process started.
Tenant	Type string Properties Filter, Group, idLookup, Sort Description The ID of the tenant that was scored.

Associated Objects

This object has these associated objects. If the API version isn't specified, it's available in the same API versions as this object. Otherwise, it's available in the specified API version and later.

TenantSecurityMonitorMetricChangeEvent on page 68

Change events are available for the object.

TenantSecurityMonitorMetricFeed on page 55

Feed tracking is available for the object.

TenantSecurityMonitorMetricHistory on page 63

History is available for tracked fields of the object.

TenantSecurityMonitorMetricOwnerSharingRule on page 65

Sharing rules are available for the object.

TenantSecurityMonitorMetricShare on page 67

Sharing is available for the object.

TenantSecurityNotification

Stores information about notifications that were triggered in Security Center as a function of the Alerts feature. For more information, see [Create Alerts for Security Changes](#). This object is available to Security Center subscribers in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is read-only.

Fields

Field	Details
MetricCount	Type int Properties Create, Filter, Group, Sort, Update Description The metric count that triggered the notification.
MetricIdentifier	Type string Properties Create, Filter, Group, idLookup, Sort, Update

Field	Details
	Description The ID of the type of metric that was counted.
MetricsType	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The metric for which the notification was sent.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the triggered notification rule.
NotificationDate	Type dateTime Properties Create, Filter, Sort, Update Description The date and time that the notification was sent.
NotificationType	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The type of notification sent. For example, a Chatter feed or push notification.
Operator	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The quantity of metrics used to measure.
RecipientEmails	Type textarea Properties Create, Nillable, Update

Field	Details
	Description The email addresses of the recipients who receive security notifications.
RuleName	Type string Properties Create, Filter, Group, Sort, Update Description The name of the notification rule.
Tenant	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The ID of the tenant for which the notification was triggered.
TenantName	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The org name of the tenant for which the notification was triggered.
Threshold	Type int Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The threshold value that triggered the notification.
TriggerType	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The type of trigger that set off the notification. For example, a security change was made.

Associated Objects

This object has these associated objects. If the API version isn't specified, it's available in the same API versions as this object. Otherwise, it's available in the specified API version and later.

TenantSecurityNotificationChangeEvent on page 68

Change events are available for the object.

TenantSecurityNotificationFeed on page 55

Feed tracking is available for the object.

TenantSecurityNotificationHistory on page 63

History is available for tracked fields of the object.

TenantSecurityNotificationOwnerSharingRule on page 65

Sharing rules are available for the object.

TenantSecurityNotificationShare on page 67

Sharing is available for the object.

TenantSecurityNotificationRule

Stores an alert configured in the Security Center Alerts feature to notify recipients of changes made to security settings. For more information, see [Create Alerts for Security Changes](#). This object is available to Security Center subscribers in API version 53.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is read/write.

Fields

Field	Details
MetricsType	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The type of data being collected.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update

Field	Details
	Description The name of the metric for which data is being collected.
NotificationRuleIdentifier	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The ID of the alert that was triggered. This field is unique within your organization.
NotificationType	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The type of notification used for the alert. The options are: • Email • In-App
Operator	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The operator for the change that triggered the alert. For example, greater than.
RecipientEmails	Type textarea Properties Create, Nillable, Update Description The email addresses for the recipients of the alert details.
RuleName	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the custom alert that triggered the notification. This field is unique within your organization.

Field	Details
Status	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The status of the alert setting. The options are: • Active • Draft • Inactive
Threshold	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The threshold value that triggered the alert.
TriggerType	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The type of trigger used for the alert. The values are: • Always • On Change
Version	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The version number of the custom alert.

Associated Objects

This object has these associated objects. If the API version isn't specified, it's available in the same API versions as this object. Otherwise, it's available in the specified API version and later.

[TenantSecurityNotificationRuleChangeEvent](#) on page 68

Change events are available for the object.

TenantSecurityNotificationRuleFeed on page 55

Feed tracking is available for the object.

TenantSecurityNotificationRuleHistory on page 63

History is available for tracked fields of the object.

TenantSecurityNotificationRuleOwnerSharingRule on page 65

Sharing rules are available for the object.

TenantSecurityNotificationRuleShare on page 67

Sharing is available for the object.

TenantSecurityMetricDetailLink

Represents the link between the metric count and metric drill down. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is read-only.

Fields

Field	Details
DetailIdentifier	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The unique identifier for this detail record.
MetricIdentifier	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The ID of the type of metric counted. This field is unique within your organization.
Name	Type string

Field	Details
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description The name of the metric for the data collected.
Tenant	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The ID of the tenant that was targeted in the event.

TenantSecurityPackage

Stores details about managed and unmanaged packages that are added, updated, or removed from a tenant in Security Center. Use this object to identify whether new packages are installed, upgraded, or uninstalled from your connected tenants. This object is available to Security Center subscribers in API version 53.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object can only be read and queried.

Fields

Field	Details
Action	Type string
	Properties Filter, Group, idLookup, Nillable, Sort
	Description The action taken on a package within a tenant. The options are: • Added • Removed

Field	Details
ActionDate	Type dateTime Properties Filter, Nillable, Sort Description The date the action was taken.
AppExchangeReady	Type int Properties Filter, Group, Nillable, Sort Description Indicates whether the package has passed AppExchange review.
DetailIdentifier	Type string Properties Filter, Group, idLookup, Sort Description The ID of the individual detail record. This field is unique within your org.
InstalledBy	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The user that installed the package.
MetricIdentifier	Type string Properties Filter, Group, Sort Description The ID of the type of metric that was counted.
MetricsType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of data being collected.

Field	Details
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the metric for which data is being collected.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix associated with the package.
PackageName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the package being added to or removed from the tenant.
Publisher	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the publisher that created the package.
ReleaseStatus	Type string Properties Filter, Group, Nillable, Sort Description The release status of the package. The options are: • Beta • Released
Tenant	Type string Properties Filter, Group, idLookup, Sort

Field	Details
	Description The ID of the tenant that the package was added to or removed from.
TenantName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the tenant that the package was added to or removed from.
Version	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The current version of the package.

Associated Objects

This object has these associated objects. If the API version isn't specified, it's available in the same API versions as this object. Otherwise, it's available in the specified API version and later.

[TenantSecurityPackageChangeEvent](#) on page 68

Change events are available for the object.

[TenantSecurityPackageFeed](#) on page 55

Feed tracking is available for the object.

[TenantSecurityPackageHistory](#) on page 63

History is available for tracked fields of the object.

[TenantSecurityPackageOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[TenantSecurityPackageShare](#) on page 67

Sharing is available for the object.

TenantSecurityPolicy

Stores security policies created and deployed in Security Center. For more information, see [Define and Deploy Security Policies](#). This object is available to Security Center subscribers in API version 54.0 and later.

Supported Calls

```
create(), delete(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(),
undelete(), update(), upsert()
```

Special Access Rules

This object is read/write.

Fields

Field	Details
ApiName	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The API name of the policy.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the policy.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the policy.
PolicyData	Type textarea Properties Create, Update Description The policy details contained in JSON format.
PolicyIdentifier	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The ID of this policy. Contains a unique virtual key from child to parent.

Field	Details
PolicyType	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The type of policy. For example, Health Check Baseline.
SourceRowIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the policy that is applied to the tenant. This value is specific to the org that owns this record.
Status	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The status of the policy. For example, the policy is active or inactive.
Version	Type int Properties Create, Filter, Group, idLookup, Sort, Update Description The version of the policy.

Associated Objects

This object has these associated objects. If the API version isn't specified, it's available in the same API versions as this object. Otherwise, it's available in the specified API version and later.

[TenantSecurityPolicyChangeEvent](#) on page 68

Change events are available for the object.

[TenantSecurityPolicyFeed](#) on page 55

Feed tracking is available for the object.

[TenantSecurityPolicyHistory](#) on page 63

History is available for tracked fields of the object.

[TenantSecurityPolicyOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[TenantSecurityPolicyShare](#) on page 67
Sharing is available for the object.

TenantSecurityPolicyDeployment

Stores the status of deployments of a Security Center policy on a tenant. For more information, see [Define and Deploy Security Policies](#). This object is available to Security Center subscribers in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is read/write.

Fields

Field	Details
DeploymentDate	Type dateTime Properties Create, Filter, Sort, Update Description The date the deployment was triggered.
DeploymentStatus	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The status of the deployment. For example, Not Deployed, Processing, Deployed, or Failed.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the deployment status.

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the deployment.
PolicyIdentifier	Type string Properties Create, Filter, Group, Sort, Update Description The ID of the TenantSecurityPolicy entity.
StatusDate	Type dateTime Properties Create, Filter, Sort, Update Description The date that the status of the deployment was provided.
Tenant	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The ID of the tenant for which the policy was deployed.

Associated Objects

This object has these associated objects. If the API version isn't specified, it's available in the same API versions as this object. Otherwise, it's available in the specified API version and later.

[TenantSecurityPolicyDeploymentChangeEvent](#) on page 68

Change events are available for the object.

[TenantSecurityPolicyDeploymentFeed](#) on page 55

Feed tracking is available for the object.

[TenantSecurityPolicyDeploymentHistory](#) on page 63

History is available for tracked fields of the object.

[TenantSecurityPolicyDeploymentOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[TenantSecurityPolicyDeploymentShare](#) on page 67
Sharing is available for the object.

TenantSecurityPolicySelectedTenant

Stores the list of tenants selected for a Security Center policy. For more information, see [Define and Deploy Security Policies](#). This object is available to Security Center subscribers in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is read/write.

Fields

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the policy for the selected tenant.
PolicyIdentifier	Type string Properties Create, Filter, Group, Sort, Update Description The ID of the security policy.
Tenant	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The ID of the tenant.

Associated Objects

This object has these associated objects. If the API version isn't specified, it's available in the same API versions as this object. Otherwise, it's available in the specified API version and later.

[TenantSecurityPolicySelectedTenantChangeEvent](#) on page 68

Change events are available for the object.

[TenantSecurityPolicySelectedTenantFeed](#) on page 55

Feed tracking is available for the object.

[TenantSecurityPolicySelectedTenantHistory](#) on page 63

History is available for tracked fields of the object.

[TenantSecurityPolicySelectedTenantOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[TenantSecurityPolicySelectedTenantShare](#) on page 67

Sharing is available for the object.

TenantSecurityReportAnomaly

Stores anomalies in how users run or export reports, including unsaved reports, as detected by Threat Detection. For more information, see [Threat Detection](#). This object is available to Security Center subscribers in API version 53.0 and later.



Note: Threat Detection is available only for Event Monitoring subscribers.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is read-only.

Fields

Field	Details
<code>DetailIdentifier</code>	Type string Properties Filter, Group, idLookup, Sort Description The ID of the detail record. This field is unique within your org.
<code>EventDate</code>	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The date when the hijacking event was reported. For example, 2020-01-20T19:12:26.965Z. The most granular setting is milliseconds.
EventIdentifier	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The unique ID of the event.
EventName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the event, which is Report Anomaly.
MetricIdentifier	Type string Properties Filter, Group, Sort Description The ID of the type of metric that was counted.
MetricsType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of data being collected.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the metric for which data is being collected.

Field	Details
Report	Type string Properties Filter, Group, Nillable, Sort Description The ID for the report for which this anomaly event was detected. If the anomaly resulted from a user executing an unsaved report, the value of this field is null.
Score	Type double Properties Filter, idLookup, Nillable, Sort Description A number from 0 through 100 that represents the anomaly score for the report execution or export tracked by this event. The anomaly score indicates how the user's current report activity differs from their typical activity. A low score indicates that the current report activity is similar to the user's usual activity. A high score indicates that it's different.
SecurityEventData	Type textarea Properties Nillable Description The set of features about the report activity that triggered this anomaly event. For example, a user typically downloads 10 accounts at a time, but then deviates from that pattern and downloads 1,000 accounts. This event is triggered, and the contributing features are captured in this field. Potential features include row count, column count, average row size, day of week, and the browser's user agent used for the report activity. The data captured also shows as a percentage how much a particular feature contributed to this anomaly event. The data is in JSON format.
Summary	Type textarea Properties Nillable Description A text summary of the report anomaly that caused this event.
Tenant	Type string Properties Filter, Group, idLookup, Sort

Field	Details
	Description The ID of the tenant that was targeted in the event.
TenantName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the tenant that was targeted in the event.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The origin user's unique ID.
Username	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The origin username in the format of user@company.com at the time the event was created.

Associated Objects

This object has these associated objects. If the API version isn't specified, it's available in the same API versions as this object. Otherwise, it's available in the specified API version and later.

[TenantSecurityReportAnomalyChangeEvent](#) on page 68

Change events are available for the object.

[TenantSecurityReportAnomalyFeed](#) on page 55

Feed tracking is available for the object.

[TenantSecurityReportAnomalyHistory](#) on page 63

History is available for tracked fields of the object.

[TenantSecurityReportAnomalyOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[TenantSecurityReportAnomalyShare](#) on page 67

Sharing is available for the object.

TenantSecuritySessionHijacking

Stores information about session hijacking events as detected by Threat Detection within connected tenants in Security Center. For more information, see [Threat Detection](#). This object is available for Security Center subscribers in API version 53.0 and later.

 **Note:** Threat Detection is available only for Event Monitoring subscribers.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is read-only.

Fields

Field	Details
CurrentIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the observed fingerprint that deviates from the previous fingerprint. The difference between the current and previous values is one indicator that a session hijacking attack has occurred. If the IP address didn't contribute to the observed fingerprint deviation, the value of this field is the same as the <code>PreviousIp</code> field.
CurrentPlatform	Type string Properties Filter, Group, Nillable, Sort Description The platform of the observed fingerprint that deviates from the previous fingerprint. The difference between the current and previous values is one indicator that a session hijacking attack has occurred. If the platform didn't contribute to the observed fingerprint deviation, the value of this field is the same as the <code>PreviousPlatform</code> field.
CurrentScreen	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The screen of the observed fingerprint that deviates from the previous fingerprint. The difference between the current and previous values is one indicator that a session hijacking attack has occurred. If the screen didn't contribute to the observed fingerprint deviation, the value of this field is the same as the <code>PreviousScreen</code> field.
CurrentUserAgent	Type textarea Properties Nillable Description The user agent of the observed fingerprint that deviates from the previous fingerprint. The difference between the current and previous values is one indicator that a session hijacking attack has occurred. If the user agent didn't contribute to the observed fingerprint deviation, the value of this field is the same as the <code>PreviousUserAgent</code> field.
CurrentWindow	Type string Properties Filter, Group, Nillable, Sort Description The browser window of the observed fingerprint that deviates from the previous fingerprint. The difference between the current and previous values is one indicator that a session hijacking attack has occurred. If the window didn't contribute to the observed fingerprint deviation, the value of this field is the same as the <code>PreviousWindow</code> field.
DetailIdentifier	Type string Properties Filter, Group, idLookup, Sort Description The ID of the individual detail record. This field is unique within your org.
EventDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the hijacking event was reported. For example, 2020-01-20T19:12:26.965Z. The most granular setting is milliseconds.
EventIdentifier	Type string

Field	Details
	Properties Filter, Group, idLookup, Nillable, Sort Description The unique ID of the event.
EventName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the event, which is Session Hijacking.
MetricIdentifier	Type string Properties Filter, Group, Sort Description The ID of the type of metric that was counted.
MetricsType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of data being collected.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the metric for which data is being collected.
PreviousIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the previous fingerprint. The difference between the current and previous values is one indicator that a session hijacking attack has occurred. See the <code>CurrentIp</code> field for the newly observed IP address.

Field	Details
PreviousPlatform	Type string Properties Filter, Group, Nillable, Sort Description The platform of the previous fingerprint. The difference between the current and previous values is one indicator that a session hijacking attack has occurred. See the <code>CurrentPlatform</code> field for the newly observed platform.
PreviousScreen	Type string Properties Filter, Group, Nillable, Sort Description The screen of the previous fingerprint. The difference between the current and previous values is one indicator that a session hijacking attack has occurred. See the <code>CurrentScreen</code> field for the newly observed screen.
PreviousUserAgent	Type textarea Properties Nillable Description The user agent of the previous fingerprint. The difference between the current and previous values is one indicator that a session hijacking attack has occurred. See the <code>CurrentUserAgent</code> field for the newly observed user agent.
PreviousWindow	Type string Properties Filter, Group, Nillable, Sort Description The browser window of the previous fingerprint. The difference between the current and previous values is one indicator that a session hijacking attack has occurred. See the <code>CurrentWindow</code> field for the newly observed window.
Score	Type double Properties Filter, idLookup, Nillable, Sort

Field	Details
	Description Specifies how much the new fingerprint deviates from the previous one. The score is from 6.0 through 21.0. The event exposes five field pairs (such as <code>CurrentIp</code> and <code>PreviousIp</code>) to view the before and after data for browser features that contributed to this anomaly. See the <code>SecurityEventData</code> field for all contributing features in JSON format. A large deviation score (6.0 or more) between two intra-session fingerprints indicates that two different browsers are active in the same session. The presence of two active browsers usually means that session hijacking has occurred.
SecurityEventData	Type textarea Properties Nillable Description The set of browser fingerprint features that triggered this event. See the Threat Detection documentation for the possible features. For example, a user's current browser fingerprint diverges from the previously known fingerprint. If Salesforce concludes the user's session was hijacked, it fires this event, and the contributing features are captured in this field in JSON format. Each feature describes a browser fingerprint property, such as the browser user agent, window, or platform. The data includes the current and previous values for each feature.
Summary	Type textarea Properties Nillable Description A text summary of the threat that caused this event. The summary lists the browser fingerprint features that most contributed to the threat detection, along with their contribution to the total score.
Tenant	Type string Properties Filter, Group, idLookup, Sort Description The ID of the tenant that was targeted in the event.
TenantName	Type string Properties Filter, Group, idLookup, Nillable, Sort

Field	Details
	Description The name of the tenant that was targeted in the event.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The origin user's unique ID.
Username	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The origin username in the format of user@company.com at the time that the event was created.

Associated Objects

This object has these associated objects. If the API version isn't specified, it's available in the same API versions as this object. Otherwise, it's available in the specified API version and later.

[TenantSecuritySessionHijackingChangeEvent](#) on page 68

Change events are available for the object.

[TenantSecuritySessionHijackingFeed](#) on page 55

Feed tracking is available for the object.

[TenantSecuritySessionHijackingHistory](#) on page 63

History is available for tracked fields of the object.

[TenantSecuritySessionHijackingOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[TenantSecuritySessionHijackingShare](#) on page 67

Sharing is available for the object.

TenantSecurityTenantInfo

Stores information on changes related to the tenant history. This object is available in API version 56.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is read only.

Fields

Field	Details
DetailIdentifier	Type string Properties Filter, Group, idLookup, Sort Description The unique identifier for this record.
Instance	Type string Properties Filter, Group, Nillable, Sort Description The instance that the tenant is being hosted on.
MyDomainName	Type string Properties Filter, Group, Nillable, Sort Description The name of the domain for this tenant.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the metric for which the data is being collected.
SandboxAlias	Type string Properties Filter, Group, Nillable, Sort Description The alias specified by the user when the user creates a Sandbox.

Field	Details
SandboxType	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The type specified by the user when the user creates a Sandbox.
Status	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The status of the tenant. For example, active or inactive.
Tenant	Type string Properties Filter, Group, idLookup, Sort Description The ID of the tenant.
TenantName	Type string Properties Filter, Group, idLookup, Sort Description The name of the tenant (org) that this record is for.
TenantType	Type string Properties Filter, Group, idLookup, Sort Description The type of tenant in this org.

Usage

Associated Objects

This object has the following associated objects. If the API version isn’t specified, they’re available in the same API versions as this object. Otherwise, they’re available in the specified API version and later.

TenantSecurityTenantInfoChangeEvent on page 68

Change events are available for the object.

TenantSecurityTenantInfoFeed on page 55

Feed tracking is available for the object.

TenantSecurityTenantInfoHistory on page 63

History is available for tracked fields of the object.

TenantSecurityTenantInfoOwnerSharingRule on page 65

Sharing rules are available for the object.

TenantSecurityTenantInfoShare on page 67

Sharing is available for the object.

TenantSecurityTransactionPolicyTrend

Stores changes to the count of Transaction Security Policies for a connected tenant within Security Center. This object is available for Security Center subscribers in API version 55.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is read-only.

Fields

Field	Details
Action	Type string Properties Filter, Group, idLookup, Nillable, Sort Description Stores information on a change to the policy. Available options include: • ADDED • REMOVED

Field	Details
	UPDATED
ActionBy	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the person who made this change.
ActionConfig	Type textarea Properties Nillable Description Contains a JSON description for how a user is alerted to an action on the policy. For example: - In-app - Email
ActionDate	Type dateTime Properties Filter, Nillable, Sort Description When this change was made.
DetailIdentifier	Type string Properties Filter, Group, idLookup, Sort Description Unique identifier for this detail record.
EventName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the event of the corresponding Transaction Security Policy.
MetricIdentifier	Type string

Field	Details
	Properties Filter, Group, Sort Description The ID of the corresponding TenantSecurityMonitorMetric.
MetricsType	Type string Properties Filter, Group, Sort Description The type of metric for the data collected.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the metric for the data collected.
Tenant	Type string Properties Filter, Group, idLookup, Sort Description The ID of the tenant (org) that this record is for.
TenantName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the tenant (org) that this record is for.
TransactionPolicyState	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The state of the transaction security policy. The possible states are ENABLED or DISABLED.
TransactionPolicyType	Type string

Field	Details
	Properties Filter, Group, idLookup, Nillable, Sort
	Description The type of policy configured. The available types are standard policy or a custom Apex policy.

Associated Objects

This object has these associated objects. If the API version isn't specified, it's available in the same API versions as this object. Otherwise, it's available in the specified API version and later.

TenantSecurityPolicyChangeEvent on page 68

Change events are available for the object.

TenantSecurityPolicyFeed on page 55

Feed tracking is available for the object.

TenantSecurityPolicyHistory on page 63

History is available for tracked fields of the object.

TenantSecurityPolicyOwnerSharingRule on page 65

Sharing rules are available for the object.

TenantSecurityPolicyShare on page 67

Sharing is available for the object.

TenantSecurityTrigTransactionSecurityPol

Stores metric details related to Transaction Security Policy triggering events. This object is available in API version 63.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is read only.

Fields

Field	Details
ApexClass	Type String
	Properties Filter, Group, Nillable, Sort

Field	Details
	Description The name of the Apex class used to evaluate the policy.
ApexIdentifier	Type String Properties Filter, Group, Nillable, Sort Description The ID of the Apex code used to evaluate the policy.
ClientIp	Type String Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP, such as a login from AppExchange, is shown as "Salesforce.com IP".
DetailIdentifier	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The ID of the individual detail record. This field is unique within your organization.
FlowIdentifier	Type String Properties Filter, Group, Nillable, Sort Description The ID of the flow used to evaluate the policy.
FlowName	Type String Properties Filter, Group, Nillable, Sort Description The name of the Flow used to evaluate the policy.
LoginKey	Type String

Field	Details
	Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.
MetricIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the type of metric that was counted. This field is unique within your organization.
MetricsType	Type string Properties Filter, Group, Nillable, Sort Description The type of data collected.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the metric for which data is being collected.
Policy Identifier	Type String Properties Filter, Group, Nillable, Sort Description The 15-character ID of the policy being evaluated.
PolicyName	Type string Properties Filter, Group, Nillable, Sort Description The name of the policy being evaluated.

Field	Details
PolicyOutcome	Type string Properties Filter, Group, Nillable, Sort Description The result of the transaction policy.
PolicyType	Type string Properties Filter, Group, Nillable, Sort Description The real time action selected for the policy.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same RequestIdentifier.
RowVersion	Type string Properties Filter, Group, Sort Description
SessionKey	Type string Properties Filter, Group, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.
Tenant	Type string Properties Filter, Group, idLookup, Sort

Field	Details
	Description The ID of the tenant of this triggered the Transaction Security Policy event.
TenantName	Type string Properties Filter, Group, idLookup, Sort Description The name of the tenant where this triggered Transaction Security Policy happened.
Timestamp	Type dateTime Properties Filter, Group, idLookup, Sort Description The access time of Salesforce services in GMT. Milliseconds are the most granular setting.
Triggered Timestamp	Type dateTime Properties Filter, Group, idLookup, Sort Description The time at which the Transaction Security event was generated.
Uri	Type string Properties Filter, Group, idLookup, Sort Description The URI of the page that's receiving the request.
UserIdentifier	Type string Properties Filter, Group, idLookup, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API.
Username	Type string Properties Filter, Group, idLookup, Sort

Field	Details
	Description The username of the user who's using Salesforce services through the UI or the API.

TenantSecurityTrustedIpRangeTrend

Stores details of changes related to trusted IP ranges in Security Center. This object is available for Security Center subscribers in API version 54.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is read-only.

Fields

Field	Details
Action	Type string Properties Filter, Group, idLookup, Nillable, Sort Description Stores information on a change to the policy. Available options include: • ADDED • REMOVED • UPDATED
ActionBy	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the person who made this change.
ActionDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description When this change was made.
Description	Type string Properties Filter, Group, idLookup, Nillable, Sort Description A description of the trusted IP range. For example, "Trusting the IP addresses from NA-West region".
DetailIdentifier	Type string Properties Filter, Group, idLookup, Nillable, Sort Description Unique identifier for this detail record.
IpEndAddress	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The end IP address of a trusted IP range. For example, 10.0.0.0 – 10.255.255.255.
IpRangeIdentifier	Type string Properties Filter, Group, idLookup, Nillable, Sort Description Unique identifier of the IP range.
IpStartAddress	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The start IP address of a trusted IP range. For example, 10.0.0.0 – 10.255.255.255.

Field	Details
MetricIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the corresponding TenantSecurityMonitorMetric.
MetricsType	Type string Properties Filter, Group, Nillable, Sort Description The type of metric for the data collected.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the metric for the data collected.
Tenant	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The ID of the tenant (org) that this record is for.
TenantName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the tenant (org) that this record is for.
UsageOptions	Type string Properties Filter, Group, Nillable, Sort Description For internal use only.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

TenantSecurityTrustedIpRangeTrendChangeEvent on page 68

Change events are available for the object.

TenantSecurityTrustedIpRangeTrendFeed on page 55

Feed tracking is available for the object.

TenantSecurityTrustedIpRangeTrendHistory on page 63

History is available for tracked fields of the object.

TenantSecurityTrustedIpRangeTrendOwnerSharingRule on page 65

Sharing rules are available for the object.

TenantSecurityTrustedIpRangeTrendShare on page 67

Sharing is available for the object.

TenantSecurityUserActivity

Stores details related to how a user interacts with a tenant. Use this object to determine whether to reevaluate a user's access to your org for security purposes. You can check whether a user has never logged in, hasn't been active for 90 days, has a frozen account, or isn't using multi-factor authentication. This object is available to Security Center subscribers in API version 53.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object can only be read and queried.

Fields

Field	Details
<code>DetailIdentifier</code>	Type string Properties Filter, Group, idLookup, Sort Description The ID of the individual detail record. This field is unique within your org.
<code>LastLoginDate</code>	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The last time the user logged in.
MetricIdentifier	Type string Properties Filter, Group, Sort Description The ID of the type of metric that was counted.
MetricsType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of data being collected.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the metric for which data is being collected.
Tenant	Type string Properties Filter, Group, idLookup, Sort Description The ID of the tenant.
TenantName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the tenant where the user activity happened.
UserCreateDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The date that the user was created.
UserEmail	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The email address of the user.
UserLicense	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The license assigned to the user.
Username	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The user's org username.

Associated Objects

This object has these associated objects. If the API version isn't specified, it's available in the same API versions as this object. Otherwise, it's available in the specified API version and later.

[TenantSecurityUserActivityChangeEvent](#) on page 68

Change events are available for the object.

[TenantSecurityUserActivityFeed](#) on page 55

Feed tracking is available for the object.

[TenantSecurityUserActivityHistory](#) on page 63

History is available for tracked fields of the object.

[TenantSecurityUserActivityOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[TenantSecurityUserActivityShare](#) on page 67

Sharing is available for the object.

TenantSecurityUserPerm

Stores information on permissions assigned to a user. Use this object to see which tenants a user is assigned to. This object is available to Security Center subscribers in API version 53.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object can only be read and queried.

Fields

Field	Details
Action	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The action taken regarding the user's permission. The options are: - Added - Removed
ActionBy	Type string Properties Filter, Group, Nillable, Sort Description This field is reserved for future use.
ActionDate	Type dateTime Properties Filter, Nillable, Sort Description The date that the permission action was taken.
Context	Type string

Field	Details
	Properties Filter, Group, idLookup, Nillable, Sort Description The name of the profile or permission set assigned to the user.
ContextType	Type string Properties Filter, Group, idLookup, Nillable, Sort Description Indicates the method through which the permission was granted. The options are: • Permission Set • Profile
DetailIdentifier	Type string Properties Filter, Group, idLookup, Sort Description The ID of the individual detail record. This field is unique within your org.
MetricIdentifier	Type string Properties Filter, Group, Sort Description The ID of the type of metric that was counted.
MetricsType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The type of metric that the assigned permission represents.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the metric for which data is being collected.

Field	Details
Tenant	Type string Properties Filter, Group, idLookup, Sort Description The ID of the tenant where the user permission was applied.
TenantName	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the connected tenant where the user permission was applied.
UserEmail	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The user's email address.
UserLicense	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The license assigned to the user.
Username	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The user's org username.

Associated Objects

This object has these associated objects. If the API version isn't specified, it's available in the same API versions as this object. Otherwise, it's available in the specified API version and later.

[TenantSecurityUserPermChangeEvent](#) on page 68

Change events are available for the object.

TenantSecurityUserPermFeed on page 55

Feed tracking is available for the object.

TenantSecurityUserPermHistory on page 63

History is available for tracked fields of the object.

TenantSecurityUserPermOwnerSharingRule on page 65

Sharing rules are available for the object.

TenantSecurityUserPermShare on page 67

Sharing is available for the object.

TenantUsageEntitlement

Represents a data structure that contains information about the features or functionalities that a Salesforce org has access to. This object is available in API version 28.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
AmountUsed	Type double Properties Filter, Nillable, Sort Description The quantity of an entitlement that has been used.
CurrentAmountAllowed	Type double Properties Filter, Sort Description The amount of an entitlement that a tenant is allowed to use.
EndDate	Type date Properties Filter, Group, Nillable, Sort Description The end date of the setting, based on license end dates that entitle the org to that setting.

Field	Details
Frequency	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description How often the tenant's entitlement data is automatically reviewed to see how much of the entitlement has been used. Possible values are: • Daily • Fortnightly • Monthly • Once • Quarterly • Weekly • Yearly
HasRollover	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates that a certain amount of a customer's unused entitlements from a set time period can be added to the next set time period. This field is reserved for future use. The default value is <code>false</code>.
IsPersistentResource	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates that the data that will be saved and available for future use even after closing a session. The default value is <code>false</code>.
MasterLabel	Type string Properties Group, Nillable

Field	Details
	Description The overarching name of an element in your organization. A MasterLabel is visible to customers.
OverageGrace	Type percent Properties Filter, Nillable, Sort Description The percentage of the Allowed Amount that a customer can use without incurring an additional charge. The default value is 100% (no overage grace). This field is reserved for future use.
ResourceGroupKey	Type string Properties Filter, Group, Sort Description Tracks resource usage across different segments for the same setting. For example, a Messages entitlement that tracks email messages and SMS messages separately could have one ResourceGroupKey of SMS and another ResourceGroupKey of Email. In most cases though, TenantUsageEntitlements are configured for the org and not by segment.
Setting	Type string Properties Filter, Group, Sort Description A rule or attribute that can be used to configure the appearance or actions in an organization.
StartDate	Type date Properties Filter, Group, Sort Description This date is the earliest start date of any license contributing to the provisioning aggregation output.
UsageDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The date an event occurred that deducted from the tenant's entitlement.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

TenantUsageEntitlementChangeEvent on page 68

Change events are available for the object.

TenantUsageEntitlementFeed on page 55

Feed tracking is available for the object.

TenantUsageEntitlementHistory on page 63

History is available for tracked fields of the object.

TenantUsageEntitlementOwnerSharingRule on page 65

Sharing rules are available for the object.

TenantUsageEntitlementShare on page 67

Sharing is available for the object.

Territory

Represents a flexible collection of accounts and users where the users have at least read access to the accounts, regardless of who owns the accounts. Available if Sales Territories has been enabled. This object is available in API versions 7.0 to 52.0. Use Territory2 instead of Territory in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Standard and partner users can access this object. Users assigned to the Manage Territories permission set can edit this object.

Fields

Field	Details
AccountAccessLevel	Type picklist Properties Create, Filter, Group, Sort, Update

Field	Details
	Description Account access level granted to users assigned to this territory.
CaseAccessLevel	Type picklist Properties Create, Filter, Nillable, Group, Sort, Update Description Case access level granted to users assigned to this territory.
ContactAccessLevel	Type picklist Properties Filter, Group, Nillable, Sort Description A value that represents the type of access granted to the target Group, UserRole, or User for any associated contacts. The possible values are: - None - Read - Edit  Note: When DefaultContactAccess is set to "Controlled by Parent," you can't create or update this field.
Description	Type string Properties Create, Filter, Nillable, Sort, Update Description A description of the territory that is 1,000 characters or less.
DeveloperName	Type string Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Corresponds to Territory Name in the user interface.

Field	Details
	This field is available in API version 24.0 and later. When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
<code>ForecastUserId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the Forecast Manager, who is the user to whom forecasts from this territory's child territories roll up.
<code>MayForecastManagerShare</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the forecast manager can manually share their own forecast.
<code>Name</code>	Type string Properties Create, Filter, Group, Sort, Update Description A name for the territory. Limit is 80 characters. Corresponds to Label on the user interface.
<code>OpportunityAccessLevel</code>	Type picklist Properties Create, Filter, Group, Sort, Update Description Opportunity access level granted to users assigned to this territory.
<code>ParentTerritoryID</code>	Type reference Properties Create, Filter, Nillable, Update Description Territory immediately above this territory in the territory hierarchy. Label is Parent Territory ID.

Field	Details
RestrictOppTransfer	Type boolean Properties Create, Defaulted on create, Filter, Update Description Indicates whether the opportunities associated with this territory are kept within the bounds of this territory and this territory's children when account assignment rules are run (<code>true</code>), or if opportunities associated with this territory can be assigned to other nodes of the territory hierarchy when account assignment rules are run (<code>false</code>). Label is Confine Opportunity Assignment.

Usage

Use the Territory object to query your organization's territory hierarchy. Use it to obtain valid territory IDs when querying or modifying records associated with territories.

SEE ALSO:

[AccountTerritoryAssignmentRule](#)

[AccountTerritoryAssignmentRuleItem](#)

[UserTerritory](#)

TerritoryMgmtObjectConfig

Represents territory management settings and defaults for a particular object. This object is available in API version 56.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Only standard and partner users can access this object.

Fields

Field	Details
DefaultAccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description The default access level of the defined object for all territories.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The API name.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language used in the org where the territory model was created.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The readable label for this entity.
Object	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The name of the Enterprise Territory Management object. Possible values are: Lead
State	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The state of the supported object.

Territory2

Represents a sales territory. Available if Sales Territories has been enabled.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Standard and partner users can access this object. If a territory model is in `Active` state, any standard or partner user can view that model, including its territories and assignment rules. For territories in an active model, any standard or partner user can view assigned records and assigned users subject to your Salesforce sharing settings. Users cannot view territory models in other states (such as `Planning` or `Archived`).

Fields

Field Name	Details
<code>AccountAccessLevel</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Represents the default account record access levels for users that are assigned to the territory. Values are: • Read Only • Read/Write • Owner
<code>CaseAccessLevel</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Represents the default case record access levels for users that are assigned to the territory. Values are: • Private • Read Only • Read/Write
<code>ContactAccessLevel</code>	Type picklist

Field Name	Details
	Properties Filter, Group, Restricted picklist, Sort Description Represents the default contact record access levels for users that are assigned to the territory. Values are: • Private • Read Only • Read/Write
Description	Type string Properties Create, Filter, Nillable, Sort, Update Description The description of the territory. The field label in the user interface is <code>Territory Description</code>.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description Required. The unique name of the object in the API. This name can contain only underscores and alphanumeric characters and must be unique in your organization. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. The field label in the user interface is <code>Territory Name</code>. When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
ForecastUserId	Type reference Properties Filter, Group, Nillable, Sort, Update Description Unique identifier of a territory's forecast manager. To select a <code>ForecastUserId</code>, select someone in the list of users assigned to the territory.
Name	Type string

Field Name	Details
	Properties Create, Filter, Group, Sort, Update Description The name of the territory. The field label in the user interface is <code>Territory Label</code> .
<code>OpportunityAccessLevel</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Represents the default opportunity record access levels for users that are assigned to the territory. Values are: • Private • Read Only • Read/Write
<code>ParentTerritory2Id</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the territory's parent territory (if any). If the territory has no parent territory, this value is <code>null</code> .
<code>Territory2ModelId</code>	Type reference Properties Create, Filter, Group, Sort Description The ID of the territory model that the territory belongs to.
<code>Territory2TypeId</code>	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the territory type that the territory belongs to.

Territory2AlignmentLog

Represents the start and end status of a territory assignment rule run job. This object is available in API version 54.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Available if Sales Territories has been enabled.

Standard and partner users can access this object. If a territory model is in `Active` state, any standard or partner user can view that model, including its territories and assignment rules. For territories in an active model, any standard or partner user can view assigned records and assigned users subject to your Salesforce sharing settings. Users can't view territory models in other states (such as `Planning` or `Archived`).

Fields

Field	Details
EndTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the assignment rule run job finished.
Filter	Type textarea Properties Nillable Description Criteria to filter the rule jobs. For example, {RULE_LAST_MOD_DATE_FORM=2021-08-31, RULE_LAST_MOD_DATE_TO=2021-09-15}.
RunAsId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the Salesforce user who started the assignment rule run job. This is a relationship field.

Field	Details
	Relationship Name RunAs Relationship Type Lookup Refers To User
StartTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the user started the assignment rule run job.
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The status of the assignment rule run job.
Territory2Id	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the territory for which the assignment rule run was performed. If the assignment rule run was for the territory model, this value is null. This is a relationship field. Relationship Name Territory2 Relationship Type Lookup Refers To Territory2
Territory2ModelId	Type reference Properties Filter, Group, Sort

Field	Details
	Description The ID of the territory model for which the assignment rule run was performed. This is a relationship field.
	Relationship Name Territory2Model
	Relationship Type Lookup
	Refers To Territory2Model

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[Territory2AlignmentLogChangeEvent](#)

Change events are available for the object.

Territory2Model

Represents a territory model. Available if Sales Territories has been enabled.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Standard and partner users can access this object. If a territory model is in **Active** state, any standard or partner user can view that model, including its territories and assignment rules. For territories in an active model, any standard or partner user can view assigned records and assigned users subject to your Salesforce sharing settings. Users cannot view territory models in other states (such as **Planning** or **Archived**).

Fields

Field Name	Details
ActivatedDate	Type dateTime
	Properties Filter, Nillable, Sort

Field Name	Details
	Description The date when the territory model was activated.
DeactivatedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the territory model was archived.
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the territory model.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description Required. The unique name of the object in the API. This name can contain only underscores and alphanumeric characters and must be unique in your organization. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. The field label in the user interface is <code>Territory Model Name</code> . When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
LastOppTerrAssignEndDate	Type dateTime Properties Filter, Nillable, Sort Description Read-only. The date when the opportunity territory assignment filter was last run. Used for Filter-Based Opportunity Territory Assignment (Pilot in Spring '15 / API version 33).
LastRunRulesEndDate	Type dateTime

Field Name	Details
	Properties Filter, Nillable, Sort Description The date when the last rules run was completed.
Name	Type string Properties Create, Filter, Group, Sort, Update Description The territory model name. The field label in the user interface is <code>Label</code> .
State	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The state of the territory model. Values are: <code>Planning</code> , <code>Activating</code> , <code>Activation Failed</code> , <code>Active</code> , <code>Archiving</code> , <code>Archiving Failed</code> , <code>Archived</code> , <code>Deleting</code> , and <code>Deletion Failed</code> .

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[Territory2ModelChangeEvent](#) (API version 62.0)

Change events are available for the object.

[Territory2ModelFeed](#)

Feed tracking is available for the object.

[Territory2ModelHistory](#)

History is available for tracked fields of the object.

Territory2ModelHistory

Represents the history of changes to the values in the fields on a territory model. Available if Sales Territories has been enabled.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Fields

Field Name	Details
DataType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Data type of the field that was changed.
Field	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The name of the field whose value was changed.
NewValue	Type anyType Properties Nillable, Sort Description The new value of the changed field.
OldValue	Type anyType Properties Nillable, Sort Description The previous value of the changed field.
Territory2ModelId	Type reference Properties Filter, Group, Sort Description The ID of the territory model whose history is tracked.

Usage

This object is automatically generated whenever any field value changes on a territory model record. Use this object to identify those changes.

Territory2ObjectExclusion

Represents the objects that aren't included in territory assignment rule runs, even when they meet assignment rule criteria. This object is available in API version 54.0 and later.

Supported Calls

```
create(), delete(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(),
update(), upsert()
```

Special Access Rules

Available if Sales Territories has been enabled.

Standard and partner users can access this object. If a territory model is in `Active` state, any standard or partner user can view that model, including its territories and assignment rules. For territories in an active model, any standard or partner user can view assigned records and assigned users subject to your org's sharing settings. Users can't view territory models in other states (such as `Planning` or `Archived`).

Fields

Field	Details
Note	Type string Properties Create, Filter, Group, Nillable, Sort, Update
ObjectId	Type reference Properties Create, Filter, Group, Sort Description The ID of the Account object to exclude from the territory assignment rule. This is a polymorphic relationship field. Relationship Name Object Relationship Type Lookup Refers To Account
Territory2Id	Type reference

Field	Details
	Properties Create, Filter, Group, Sort
	Description The ID of the territory to exclude from the territory model assignment rule. This is a relationship field.
	Relationship Name Territory2
	Relationship Type Lookup
	Refers To Territory2

Territory2ObjSharingConfig

Represents the sharing access level of objects assigned to a particular territory. This object is available in API version 56.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`, `update()`

Special Access Rules

Only standard and partner users can access this object. Any standard or partner user can view object sharing configuration records in an active model. Users without the Manage Territories permission can't view territory records in the `Planning` or `Archived` state.

Fields

Field	Details
<code>AccessLevel</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort, Update Description The access level of the object for the particular territory.
<code>Territory2Id</code>	Type reference Properties Filter, Group, Sort

Field	Details
	Description The territory on which the access level is defined. This field is a relationship field. Relationship Name Territory2 Relationship Type Lookup Refers To Territory2
TerritoryMgmtObjectConfigId	Type reference Properties Filter, Group, Sort Description The object configuration record the territory access level is related to. This field is a relationship field. Relationship Name TerritoryMgmtObjectConfig Relationship Type Lookup Refers To TerritoryMgmtObjectConfig

Territory2Type

Represents a category for territories (Territory2). Every Territory2 must have a Territory2Type. Available only if Sales Territories has been enabled for your organization.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Standard and partner users can access this object.

Fields

Field Name	Details
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the territory type.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description Required. The unique name of the object in the API. This name can contain only underscores and alphanumeric characters and must be unique in your organization. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. The field label in the user interface is <code>Territory Type Name</code>. When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the label in the user interface.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description Required The user interface label for the territory type.
Priority	Type int

Field Name	Details
	Properties Create, Filter, Group, SortUpdate
	Description Required. Used for Filter-Based Opportunity Territory Assignment (Pilot in Spring '15 / API version 33). Lets you specify a priority for a territory type. For opportunity assignments, the filter examines all territories assigned to the account that the opportunity is assigned to. The account-assigned territory whose territory type priority is highest is then assigned to the opportunity. The <code>priority</code> field value on each territory type must be unique. Further, if there are multiple territories with the same territory type (and therefore the same priority) assigned to the account, no territory is assigned to the opportunity.

TerritoryAdminAssignment

Represents designated team members who can administer specific territories and their descendants. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To designate team members, assign them the Administer Territory Operations permission.

Fields

Field	Details
<code>CanManageHierarchy</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Lets the user update and delete the territory and its descendants, and create descendants. The default value is <code>false</code> .
<code>CanManageMembers</code>	Type boolean

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Lets the user assign other team members to the territory and its descendants. Also lets the user update the user territory association log. The default value is <code>false</code>.
CanManageRecordAssociations	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Lets the user add and remove assignments for records, author rules, and assign and run rules for the territory and its descendants. The default value is <code>false</code>.
Territory2Id	Type reference Properties Create, Filter, Group, Sort Description The ID for the territory you're letting the user administer. The user can also administer this territory's descendants. This field is a relationship field. Relationship Name Territory2 Refers To Territory2
Territory2ModelId	Type reference Properties Create, Filter, Group, Sort Description The ID for the territory model that includes the territory you're letting the user administer. This field is a relationship field. Relationship Name Territory2Model Refers To Territory2Model

Field	Details
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description The ID for the user you're letting administer the territory and its descendants. Requires that the user is assigned the Administer Territory Operations permission set. This field is a polymorphic relationship field. Relationship Name UserOrGroup Refers To Group, User

TestSuiteMembership

Associates an Apex class with an ApexTestSuite. This object is available in API version 36.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

In API version 49.0 and later, users must have the View Setup and Configuration permission to access this object.

Fields

Field Name	Description
ApexClassId	Type reference Properties Create, Filter, Group, Sort Description The Apex class whose tests are to be executed. This is a relationship field. Relationship Name ApexClass

Field Name	Description
	Relationship Type Lookup
	Refers To ApexClass
ApexTestSuiteId	Type reference
	Properties Create, Filter, Group, Sort
	Description The test suite to which the Apex class is assigned. This is a relationship field.
	Relationship Name ApexTestSuite
	Relationship Type Lookup
	Refers To ApexTestSuite

Usage

Insert a TestSuiteMembership object using an API call to associate an Apex class with an ApexTestSuite object. (ApexTestSuite and TestSuiteMembership aren't editable through Apex DML.) To remove the class from the test suite, delete the TestSuiteMembership object. If you delete an Apex test class or test suite, all TestSuiteMembership objects that contain that class or suite are deleted.

The following SOQL query returns the membership object that relates this Apex class to this test suite.

```
SELECT Id FROM TestSuiteMembership WHERE ApexClassId = '01pD0000000Fhy9IAC'  
AND ApexTestSuiteId = '05FD00000004CDBMA2'
```

SEE ALSO:

[ApexTestSuite](#)

ThirdPartyAccountLink

Represents the list of external users who authenticated using an authentication provider. This object is available in API version 32.0 and later.

A list of third-party account links is generated when users of an organization authenticate using an external authentication provider. Use this object to list and revoke a given user's social sign-on connections (such as Facebook®).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

If you try to use [Apex DML operations](#) and then query this object in the same call, you get an `UncommittedWork` error with this description.

A callout was unsuccessful because of pending uncommitted work related to a process, flow, or Apex operation.
Commit or roll back the work, and then try again.

To avoid this error, execute DML operations and queries in separate, asynchronous calls.

Fields

Field Name	Details
Handle	Type string Properties Filter, Nillable, Sort Description The username in the third-party system.
IsNotSsoUsable	Type boolean Properties Defaulted on create, Filter, Sort Description Support for single sign-on. If <code>true</code> , the link can't be used for a single sign-on flow. It's only available OAuth access and refresh tokens.
Provider	Type string Properties Filter, Nillable, Sort Description The third-party account provider name.
RemoteIdentifier	Type string

Field Name	Details
	Properties Filter, Nillable, Sort Description The unique ID for the user in the third-party system.
SsoProvider	Type AuthProvider Properties Filter, Nillable, Sort Description The foreign key to the AuthProvider on page 886 of the third-party system.
SsoProviderId	Type reference Properties Filter, Nillable, Sort Description The ID associated with the SsoProvider value. This is a relationship field. Relationship Name SsoProvider Relationship Type Lookup Refers To AuthProvider
SsoProviderName	Type string Properties Filter, Nillable, Sort Description The name associated with the AuthProvider of the third-party system, in case the user has no access to the provider foreign key (the SsoProvider value).
ThirdPartyAccountLinkKey	Type string Properties Filter, Nillable, Sort Description A concatenated string including the organization ID, the SsoProviderId value, the SsoProvider value, and the RemoteIdentifier value.

Field Name	Details
UserId	Type reference Properties Filter, Nillable, Sort Description The Salesforce user associated with this third-party account link. This is a relationship field. Relationship Name User Relationship Type Lookup Refers To User

Usage

Admins (with the Manage Users permission) querying this object can see all the links for all users in the organization. Without the Manage Users permission, users can only retrieve their own links. Users sometimes don't have access to the `SsoProvider` value (the foreign key). In this case, use the `SsoProviderName` to render the name of the provider for the associated link.

Use the Apex method `Auth.AuthToken.revokeAccess()` to revoke a link. To use this method, the `IsNotSsoUsable` field must be `false`.

To make the `ThirdPartyAccountLink` standard object writable for Salesforce admins, contact Salesforce Customer Support. With this feature, you can easily add or delete third-party account links using the API, but you can't update existing account links.

In API version 34.0 and later, this object was enhanced to help manage high instance counts. A `query()` call returns up to 500 rows. A `queryMore()` call returns 500 more, up to 2,500 total. No more records are returned after 2,500. To make sure that you don't miss any records, issue a `COUNT()` query in a `SELECT` clause for `ThirdPartyAccountLink`. This query gives you the total number of records. If there are more than 2,500 records, use these options to manage your results.

- Divide queries by filtering on fields like `UserId` to return subsets of less than 2,500 records.
- Use `OFFSET` to get batches of 2,000 records. Start with an `OFFSET` of 0 and then increment by 2,000. If you use this option, we recommend that you also use `LIMIT` to limit each query to 2,000.



Note: The `OFFSET` clause is limited to 2,000 rows. Requesting an offset greater than 2,000 results in a `NUMBER_OUTSIDE_VALID_RANGE` error.

For example, use an initial query with this structure.

```
SELECT <desired fields> FROM ThirdPartyAccountLink LIMIT 2000 OFFSET 0
```

Then, run another query with an offset of 2,000.

```
SELECT <desired fields> FROM ThirdPartyAccountLink LIMIT 2000 OFFSET 2000
```

Continue to increase the offset by 2,000 until you have results for all records.

ThreatDetectionFeedback

Represents feedback provided by a user about a Threat Detection event that occurred in your org. The feedback specifies whether the event was malicious, suspicious, not a threat, or unknown. Each ThreatDetectionFeedback object is associated with one of these Threat Detection storage events: ApiAnomalyEventStore, CredentialStuffingEventStore, ReportAnomalyEventStore, or SessionHijackingEventStore. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `update()`, `upsert()`

Fields

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
Response	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Describes the severity of the threat. Possible values are: • Malicious • Not a Threat • Suspicious • Unknown

Field	Details
ThreatDetectionEventId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Reference to the unique ID of one of these associated Threat Detection storage events: • ApiAnomalyEventStore • CredentialStuffingEventStore • ReportAnomalyEventStore • SessionHijackingEventStore For example, 0£jRM000000005p. This is a polymorphic relationship field. Relationship Name ThreatDetectionEvent Relationship Type Lookup Refers To ApiAnomalyEventStore, CredentialStuffingEventStore, ReportAnomalyEventStore, SessionHijackingEventStore
ThreatDetectionFeedbackNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Auto-generated number used as the unique name for this object.
UserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The origin user's unique ID. For example, 005000000000123. This is a polymorphic relationship field. Relationship Name User Relationship Type Lookup Refers To User

Field	Details
Username	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The origin username in the format of <code>user@company.com</code> at the time the object was created.

Associated Object

This object has the following associated object. It's available in the same API version as this object.

[ThreatDetectionFeedbackFeed](#)

Feed tracking is available for the object.

SEE ALSO:

[Salesforce Help: Threat Detection](#)

TimeSheet

Represents a schedule of a service resource's time in Field Service or Workforce Engagement. This object is available in API v47.0 and later.

Time sheets are composed of time sheet entries, which typically track individual tasks like travel or asset repair.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service or Workforce Engagement must be enabled.

Fields

Field Name	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field Name	Details
	Description Available only if the multicurrency feature is enabled. Contains the ISO code for any currency allowed by the organization. The label in the user interface is <code>Currency ISO Code</code> .
EndDate	Type date Properties Create, Filter, Group, Sort, Update Description The last day the time sheet covers.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last interacted with this record, directly or indirectly.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (<code>LastReferencedDate</code>), but not viewed it.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the time sheet.
ServiceResourceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The service resource whose time is being tracked with the time sheet.

Field Name	Details
StartDate	Type date Properties Create, Filter, Group, Sort, Update Description The first day the time sheet covers.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The status of the time sheet. The picklist includes the following values, which can be customized: • New • Submitted • Approved
TimeSheetEntryCount	Type int Properties Filter, Group, Nillable, Sort Description (Read Only) The number of related time sheet entries.
TimeSheetNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-generated number identifying the time sheet.
TotalDurationInHours	Type double Properties Filter, Nillable, Sort Description Represents the sum total of the duration field of all the time sheet entries related to the time sheet object in hours.

Field Name	Details
TotalDurationInMinutes	Type int Properties Filter, Group, Nillable, Sort Description Represents the sum total of the duration field of all the time sheet entries related to the time sheet object in minutes.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[TimeSheetChangeEvent](#) (API version 48.0)

Change events are available for the object.

[TimeSheetFeed](#)

Feed tracking is available for the object.

[TimeSheetHistory](#)

History is available for tracked fields of the object.

[TimeSheetOwnerSharingRule](#)

Sharing rules are available for the object.

[TimeSheetShare](#)

Sharing is available for the object.

TimeSheetEntry

Represents a span of time that a service resource spends on a field service task. This object is available in API version 47.0 and later.

Time sheets are composed of time sheet entries. Time sheet entries typically track individual tasks like travel or asset repair.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only if the multicurrency feature is enabled. Contains the ISO code for any currency allowed by the organization. The label in the user interface is <code>Currency ISO Code</code>. Time sheet entries inherit their time sheet's currency code. Updates to a time sheet's currency code aren't reflected in existing time sheet entries' currency code.
Description	Type textarea Properties Create, Nillable, Update Description Notes on how the time was spent. For example, "This service took longer than normal because the machine was jammed."
DurationInMinutes	Type int Properties Filter, Group, Nillable, Sort Description Minutes recorded on the time sheet entry.
EndTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time the activity finished.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field Name	Details
	Description The timestamp when the current user last interacted with this record, directly or indirectly.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (LastReferencedDate), but not viewed it.
LocationTimeZone	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Time zone of the location where the activity occurred. This field is available in API version 50.0 and later.
StartTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time the activity began.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The status of the time sheet entry. The picklist includes the following values, which can be customized: • New • Submitted • Approved
Subject	Type string

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Activity performed; for example, repair, lunch, or travel.
TimeSheetEntryNumber	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description An auto-generated number identifying the time sheet entry.
TimeSheetId	Type reference Properties Create, Filter, Group, Sort Description The time sheet associated with the time sheet entry.
Type	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The type of work performed. The picklist includes the following values, which can be customized: • Direct • Indirect
WorkOrderId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The work order related to the time sheet entry. Work orders are searchable by their content.
WorkOrderLineItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The work order line item related to the time sheet entry. Work order line items are searchable by their content.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[TimeSheetEntryChangeEvent](#) (API version 48.0)

Change events are available for the object.

[TimeSheetEntryFeed](#)

Feed tracking is available for the object.

[TimeSheetEntryHistory](#)

History is available for tracked fields of the object.

TimeSlot

Represents a period of time on a specified day of the week during which work can be performed in Field Service, Salesforce Scheduler, or Workforce Engagement. Operating hours consist of one or more time slots. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
DayOfWeek	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The day of the week when the time slot takes place.
EndTime	Type time Properties Create, Filter, Sort, Update Description The time when the time slot ends.

Field Name	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MaxAppointments	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Maximum number of appointments for a single time slot. Available in API version 47.0 and later.
OperatingHoursId	Type reference Properties Create, Filter, Group, Sort Description The operating hours that the time slot belongs to. An operating hours' time slots appear in the Operating Hours related list. This is a relationship field. Relationship Name OperatingHours Relationship Type Lookup Refers To OperatingHours
StartTime	Type time

Field Name	Details
	Properties Create, Filter, Sort, Update Description The time when the time slot starts.
RecordSetFilterCriteriaId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the recordset filter criteria selected for the time slot. This is a relationship field. Relationship Name RecordsetFilterCriteria Relationship Type Lookup Refers To RecordsetFilterCriteria
TimeSlotNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the time slot. The name is auto-populated to a day and time format—for example, <i>Monday 9:00 AM - 10:00 PM</i>—but you can manually update it if you wish.
Type	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The type of time slot. Possible values are <i>Normal</i> and <i>Extended</i>. You may choose to use <i>Extended</i> to represent overtime shifts.
WorkTypeGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description Work type group assigned to the time slot. Available in API version 47.0 and later. This is a relationship field.
	Relationship Name WorkTypeGroup
	Relationship Type Lookup
	Refers To WorkTypeGroup

Usage

Operating hours are composed of time slots, which indicate the hours of operation for a particular day. After you create operating hours, create time slots for each day. For example, if the operating hours should be 8 AM to 5 PM Monday through Friday, create five time slots, one per day. To reflect breaks such as lunch hours, create multiple time slots in a day: for example, *Monday 8:00 AM – 12:00 PM* and *Monday 1:00 PM – 5:00 PM*.

 **Tip:** Time slots don’t come with any built-in rules, but you can create Apex triggers that limit time slot settings in your org. For example, you may want to restrict the start and end times on time slots to half-hour increments, or to prohibit end times later than 8 PM.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

TimeSlotChangeEvent (API version 54.0)

Change events are available for the object.

TimeSlotHistory (API version 62.0)

History is available for tracked fields of the object.

TimeSlotHistory

Represents the history of changes made to tracked fields on a time slot. This object is available in API version 38.0 and later.

Supported Calls

`getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Special Access Rules

Field Service must be enabled in your organization, and field tracking for time slot fields must be configured.

Fields

Field Name	Details
Field	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The name of the field that was changed.
NewValue	Type anyType Properties Nillable, Sort Description The new value of the field that was changed.
OldValue	Type anyType Properties Nillable, Sort Description The value of the field before it was changed.
TimeSlotId	Type reference Properties Filter, Group, Sort Description ID of the time slot being tracked. The history is displayed on the detail page for this record.

TodayGoal

Sets the quarterly sales goal on the performance chart. This object is available in API version 35.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
IsLocked	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Returns <code>true</code> if the goal is locked, or <code>false</code> if it's not. The default value is <code>false</code>.
MayEdit	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the goal can be edited (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the goal.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the creator of the goal. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
UserId	Type reference Properties Create, Filter, Group, Sort, Update

Field	Details
	Description The ID of the user of the goal. This field is unique within your organization. This field is a relationship field. Relationship Name User Refers To User
Value	Type currency Properties Create, Filter, Nillable, Sort, Update Description The customizable sales goal for the quarter.

Usage

This object is specific to the performance chart and has no impact on forecast quotas or any other type of goal. The performance chart is available on the home page when Seller Home is not enabled.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[TodayGoalChangeEvent](#) on page 68

Change events are available for the object.

[TodayGoalShare](#) on page 67

Sharing is available for the object.

Topic

Represents a topic on a Chatter post or record. This object is available in API version 28.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Fields

Field Name	Details
Description	Type string Properties Create, Filter, Nillable, Sort, Update Description Description of the topic.
ManagedTopicType	Type string Properties Filter, Group, Nillable, Sort Description Type of managed topic. Values are: • Content • Featured • Navigational This field is available in API version 44.0 and later.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update You can change only the spacing and capitalization of a topic name with the update property. Description Name of the topic.
NetworkId	Type reference Properties Create, Filter, Nillable, Sort Description Identifier of the Experience Cloud site to which the topic belongs. This field is available only if digital experiences is enabled in your org.
TalkingAbout	Type int Properties Filter, Group, Sort

Field Name	Details
	Description Number of people talking about the topic over the last two months, based on factors such as topic additions and comments on posts with the topic.

Usage

Use this object to query a specific topic or to get a list of all topics, even those used solely in private groups and on records, and the number of people talking about them.

Use this object to create, edit, or delete topics. To create a topic, you must have the Create Topics permission. To edit a topic, you must have the Edit Topics permission. To delete a topic, you must have the Delete Topics or Modify All Data permission.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

TopicFeed (API version 29.0)

Feed tracking is available for the object.

TopicAssignment

Represents the assignment of a topic to a specific feed item, record, or file. This object is available in API version 28.0 and later.

Administrators must enable topics for objects before users can add topics to records of that object type. Topics for most objects are available in API version 30.0 and later. Topics for ContentDocument are available in API version 37.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `delete()`, `getDeleted()`, `getUpdate()`, `query()`, `retrieve()`

Fields

Field Name	Details
EntityId	Type reference Properties Create, Filter, Group, Sort Description Identifier of the feed item, record, or file. This is a polymorphic relationship field. Relationship Name Entity

Field Name	Details
	Relationship Type Lookup Refers To Account, Asset, Campaign, Case, Contact, ContentDocument, Contract, Event, FeedItem, Lead, Opportunity, Order, ProductItem, ProductItemTransaction, ProductRequest, ProductRequestLineItem, ProductRequired, ProductTransfer, ResourceAbsence, ResourcePreference, ReturnOrder, ReturnOrderLineItem, ServiceAppointment, ServiceResource, ServiceResourceSkill, ServiceTerritory, ServiceTerritoryMember, Shift, Shipment, Solution, Task, WorkOrder, WorkOrderLineItem
EntityKeyPrefix	Type string Properties Filter, Group, idLookup, Sort Description The first three digits of the <code>EntityID</code> field, which identify the object type (account, opportunity, etc). This read-only field is available in API version 32.0 and later. Interface label is "Record Key Prefix," which appears only in reports.
EntityType	Type string Properties Filter, Group, Nillable, Sort Description The standard name for the object type (account, opportunity, etc). This read-only field is available in API version 33.0 and later.  Note: Querying topic assignments for the ManagedContentVersion entity type isn't supported. Interface label is "Object Type," which appears only in reports.  Tip: In most cases, you should use this field rather than <code>EntityKeyPrefix</code>, which exists primarily to support older reports.
NetworkId	Type reference Properties Create, Filter, Group, Nillable, Sort Description Identifier of the community to which the TopicAssignment belongs. This field is available only if digital experiences is enabled in your org.

Field Name	Details
TopicId	Type reference Properties Create, Filter, Group, Sort Description Identifier of the topic. This is a relationship field. Relationship Name Topic Relationship Type Lookup Refers To Topic

Usage

Use this object to query the assignments of topics to feed items, records, or files. To assign or remove topics, you must have the “Assign Topics” permission.

In SOQL `SELECT` syntax, this object supports nested semi-joins, allowing queries on Knowledge articles assigned to specific topics. For example:

```
SELECT parentId FROM KnowledgeArticleViewStat
  WHERE parentId in (SELECT KnowledgeArticleId FROM KnowledgeArticleVersion
    WHERE publishStatus = 'Online' AND language = 'en_US'
    AND Id in (select EntityId from TopicAssignment where TopicId = '0T0xx0000000xxx'))
```

There is no SOQL limit if the logged-in user has the “View All Data” permission. If they do have that permission, do one of the following:

- Specify a `LIMIT` clause of 1,100 records or fewer.
- Filter on `Id` or `Entity` when using a `WHERE` clause with `=`.

 **Important:** Deleting this object's records removes all its data. This action is irreversible.

 **Note:** When you create a report type on the `TopicAssignment` object, all queries are generated in SQL, which does not enforce the 1,100 record limit clause.

SEE ALSO:

[Topic](#)

[FeedItem](#)

TopicLocalization

Represents the translated version of a topic name. Topic localization applies only to navigational and featured topics in Experience Cloud sites. This object is available in API version 33.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Users with the Translation Workbench enabled can view topic translations, but the Customize Application, Manage Translation, or Manage Categories permission is required to create or update them.

Fields

Field Name	Details
Language	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The combined language and locale ISO code, which controls the language for labels displayed in an application. (The values in this field are not related to the default locale selection.) This picklist contains the following fully-supported languages: - Chinese (Simplified): <code>zh_CN</code> - Chinese (Traditional): <code>zh_TW</code> - Danish: <code>da</code> - Dutch: <code>n1_NL</code> - English: <code>en_US</code> - Finnish: <code>fi</code> - French: <code>fr</code> - German: <code>de</code> - Italian: <code>it</code> - Japanese: <code>ja</code> - Korean: <code>ko</code> - Norwegian: <code>no</code> - Portuguese (Brazil): <code>pt_BR</code> - Russian: <code>ru</code> - Spanish: <code>es</code> - Spanish (Mexico): <code>es_MX</code> Spanish (Mexico) defaults to Spanish for customer-defined translations. - Swedish: <code>sv</code>

Field Name**Details**

- Thai: `th` The Salesforce user interface is fully translated to Thai, but Help is in English.

The following end-user only languages are available.

- Arabic: `ar`
- Bulgarian: `bg`
- Croatian: `hr`
- Czech: `cs`
- English (UK): `en_GB`
- Greek: `el`
- Hebrew: `iw`
- Hungarian: `hu`
- Indonesian: `in`
- Polish: `pl`
- Portuguese (European): `pt_PT`
- Romanian: `ro`
- Slovak: `sk`
- Slovenian: `sl`
- Turkish: `tr`
- Ukrainian: `uk`
- Vietnamese: `vi`

The following platform languages are available for organizations that use Salesforce exclusively as a platform.

- Albanian: `sq`
- Afrikaans: `af`
- Amharic: `am`
- Arabic (Algeria): `ar_DZ`
- Arabic (Bahrain): `ar_BH`
- Arabic (Egypt): `ar_EG`
- Arabic (Iraq): `ar_IQ`
- Arabic (Jordan): `ar_JO`
- Arabic (Kuwait): `ar_KW`
- Arabic (Lebanon): `ar_LB`
- Arabic (Libya): `ar_LY`
- Arabic (Morocco): `ar_MA`
- Arabic (Oman): `ar_OM`
- Arabic (Qatar): `ar_QA`
- Arabic (Saudi Arabia): `ar_SA`
- Arabic (Sudan): `ar_SD`

Field Name

Details

- Arabic (Syria): ar_SY
- Arabic (Tunisia): ar_TN
- Arabic (United Arab Emirates): ar_AE
- Arabic (Yemen): ar_YE
- Armenian: hy
- Basque: eu
- Bosnian: bs
- Bengali: bn
- Burmese: my
- Catalan: ca
- Chinese (Hong Kong): zh_HK
- Chinese (Singapore): zh_SG
- Chinese (Malaysia): zh_MY
- Dutch (Belgium): nl_BE
- English (Australia): en_AU
- English (Belgium): en_BE
- English (Canada): en_CA
- English (Cyprus): en_CY
- English (Germany): en_DE
- English (Hong Kong): en_HK
- English (India): en_IN
- English (Ireland): en_IE
- English (Israel): en_IL
- English (Malaysia): en_MY
- English (Malta): en_MT
- English (Netherlands): en_NL
- English (New Zealand): en_NZ
- English (Philippines): en_PH
- English (Singapore): en_SG
- English (South Africa): en_ZA
- English (United Arab Emirates): en_AE
- Estonian: et
- Farsi: fa
- French (Belgium): fr_BE
- French (Canada): fr_CA
- French (Luxembourg): fr_LU
- French (Morocco): fr_MA
- French (Switzerland): fr_CH

Field Name**Details**

- Georgian: ka
- German (Austria): de_AT
- German (Belgium): de_BE
- German (Luxembourg): de_LU
- German (Switzerland): de_CH
- Greek (Cyprus): el_CY
- Greenlandic: kl
- Gujarati: gu
- Hawaiian: haw
- Haitian Creole: ht
- Hindi: hi
- Icelandic: is
- Irish: ga
- Italian (Switzerland): it_CH
- Kannada: kn
- Kazakh: kk
- Khmer: km
- Latvian: lv
- Lithuanian: lt
- Luxembourgish: lb
- Macedonian: mk
- Malay: ms
- Malayalam: ml
- Maltese: mt
- Marathi: mr
- Montenegrin: sh_ME
- Romanian (Moldova): ro_MD
- Romansh: rm
- Russian (Armenia): ru_AM
- Russian (Belarus): ru_BY
- Russian (Kazakhstan): ru_KZ
- Russian (Kyrgyzstan): ru_KG
- Russian (Lithuania): ru_LT
- Russian (Moldova): ru_MD
- Russian (Poland): ru_PL
- Russian (Ukraine): ru_UA
- Samoan: sm
- Serbian (Cyrillic): sr

Field Name	Details
	- Serbian (Latin): <code>sh</code> - Spanish (Argentina): <code>es_AR</code> - Spanish (Bolivia): <code>es_BO</code> - Spanish (Chile): <code>es_CL</code> - Spanish (Colombia): <code>es_CO</code> - Spanish (Costa Rica): <code>es_CR</code> - Spanish (Dominican Republic): <code>es_DO</code> - Spanish (Ecuador): <code>es_EC</code> - Spanish (El Salvador): <code>es_SV</code> - Spanish (Guatemala): <code>es_GT</code> - Spanish (Honduras): <code>es_HN</code> - Spanish (Nicaragua): <code>es_NI</code> - Spanish (Panama): <code>es_PA</code> - Spanish (Paraguay): <code>es_PY</code> - Spanish (Peru): <code>es_PE</code> - Spanish (Puerto Rico): <code>es_PR</code> - Spanish (United States): <code>es_US</code> - Spanish (Uruguay): <code>es_UY</code> - Spanish (Venezuela): <code>es_VE</code> - Swahili: <code>sw</code> - Tagalog: <code>tl</code> - Tamil: <code>ta</code> - Te reo: <code>mi</code> - Telugu: <code>te</code> - Urdu: <code>ur</code> - Welsh: <code>cy</code> - Xhosa: <code>xh</code> - Zulu: <code>zu</code>
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values.

Field Name	Details
	- In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. - In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
ParentId	Type reference Properties Create, Filter, Group, Sort Description ID that identifies the topic. After a <code>TopicLocalization</code> record is created, this ID can't be modified.
Value	Type string Properties Create, Filter, Sort, Update Description The translated text for the topic name. Label is Topic Name Translation.

TopicUserEvent

Represents an action (such as comment, post, like, or share) made by a user on a topic. This object is available in API version 42.0 and later.

Supported Calls

`delete()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Only users with the Modify All Data permission can view and delete these data.

Fields

Field	Details
ActionEnum	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The action taken by a user on a topic. The possible values are: • LIKE • COMMENT • POST • ASSIGN • SHARE • FAVORITE • UNFAVORITE • AT_MENTION • BANG_MENTION • COMMENT_LIKE • USER_ENDORSEMENT • SKILL_PEER_ENDORSEMENT • SKILL_SELF_ENDORSEMENT • BEST_ANSWER
NetworkId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the Experience Cloud site where the action was performed.
TopicId	Type reference Properties Filter, Group, Sort Description Identifier of the topic.
UserId	Type reference

Field	Details
	Properties Filter, Group, Sort
	Description Unique Salesforce user ID.

Usage

Use the TopicUserEvent object to delete topic-related activities by Experience Cloud site users who would like all their topic-related activities to be removed from a site.

TopInsight

For internal use only.

TransactionSecurityPolicy

Represents a transaction security policy definition.

This object is available in API version 42.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
ActionConfig	Type textarea
	Properties Create, Update
	Description Describes the action to take when the matching Transaction Security policy is triggered. Also indicates the type of notifications selected and the ID of the intended recipient. The recipient must be active and assigned the Modify All Data and View Setup user permissions. Multiple actions can be taken. The actions available depend on the Event Type field.
ApexPolicyId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Represents the Apex <code>TxnSecurity.PolicyCondition</code> or <code>TxnSecurity.EventCondition</code> interface for this policy.
BlockMessage	Type string Properties Create, Filter, Nillable, Sort, Update Description The custom message sent to a user when a policy blocks their action. Used in Real-Time Event Monitoring only. Maximum of 1000 characters. This field is null when the default message option is selected in the UI. Available only when <code>EventName</code> is set to <code>ApiEvent</code>, <code>ListViewEvent</code>, <code>BulkApiResultEventStore</code>, or <code>ReportEvent</code>. Available in API version 49.0 and later. Include org- or policy-specific information in your custom message, such as the name of the responsible administrator or the business unit. Be careful about what you include. Too much information on how the policy was designed. can aid a malicious user. Two-factor authentication (2FA) isn't supported in Lightning Experience, so events like <code>ListView</code> and <code>ReportEvent</code> are upgraded to <code>Block</code> in Lightning. Custom messages aren't translatable.
CustomEmailContent	Type string Properties Create, Filter, Nillable, Sort, Update Description The administrator-created custom email content sent when a policy is triggered. Used in Real-Time Event Monitoring only. Maximum of 1333 characters. This field is null when the Custom Email Content setting is selected in the UI but no message content is entered. This field is available in API version 54.0 and later. Custom messages aren't translatable.
Description	Type string Properties Create, Filter, Nillable, Sort, Update Description The description entered for this policy.

Field	Details
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The API, or program name, for this policy. Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
EventName	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Used in Real-Time Event Monitoring only. Indicates the name of the event the policy monitors. Valid values are: • ApiEvent—Tracks these user-initiated read-only API calls: <code>query()</code>, <code>queryMore()</code>, and <code>count()</code>. Captures API requests through SOAP API and Bulk API for the Enterprise and Partner WSDLs. Tooling API calls and API calls originating from a Salesforce mobile app aren't captured. • ApiAnomalyEventStore—Tracks anomalies in how users make API calls. ApiAnomalyEventStore is an object that stores the event data of ApiAnomalyEvent. This object is available in API version 50.0 and later. • BulkApiResultEventStore—Tracks when a user downloads the results of a Bulk API request. BulkApiResultEventStore is a big object that stores the event data of BulkApiResultEvent. This object is available in API version 50.0 and later. • CredentialStuffingEventStore—Tracks when a user successfully logs into Salesforce during an identified credential stuffing attack. Credential stuffing refers to large-scale automated login requests using stolen user credentials. This value is available in API 49.0 and later. • FileEventStore—Tracks when a user downloads, previews, or uploads a file. FileEventStore is a big object that stores the event data of FileEvent. This object is available in API version 57.0 and later. • GuestUserAnomalyEventStore—Tracks data access anomalies that are caused by guest user permission misconfiguration. GuestUserAnomalyEventStore is an object that stores the event data of GuestUserAnomalyEvent. This object is available in API version 60.0 and later. • ListViewEvent—Tracks when users access data with list views using Lightning Experience, Salesforce Classic, or the API. It doesn't track list views of Setup entities. • LoginAnomalyEventStore—Stores the records of data access anomalies that are caused by potentially malicious login actions. This object is available in API version 64.0 and later.

Field	Details
	• LoginAsEvent—Tracks the login activity of admins who log in to Salesforce as other users. This object is available in API version 46.0 and later. • LoginEvent—LoginEvent tracks the login activity of users who log in to Salesforce. • PermissionSetEventStore—Tracks changes to permission sets and permission set groups. • ReportAnomalyEventStore—Tracks anomalies in how users run or export reports, including unsaved reports. This value is available in API 49.0 and later. • ReportEvent—Tracks when reports are run in your org. • SessionHijackingEventStore—Tracks when unauthorized users gain ownership of a Salesforce user's session with a stolen session identifier. To detect such an event, Salesforce evaluates how significantly a user's current browser fingerprint diverges from the previously known fingerprint using a probabilistically inferred significance of change. This value is available in API 49.0 and later.
EventType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Used in Legacy Transaction Security only. Indicates the type of event the policy monitors. Valid values are: • AccessResource—Notifies you when the selected resource has been accessed. • AuditTrail—Reserved for future use. • DataExport—Notifies you when any API query is made, such as from the Data Loader API client, or when a Report export occurs. • Entity—Notifies you on use of an object type such as an authentication provider or chatter post. • Login—Notifies you when a user logs in. As of Summer '20, Legacy Transaction Security is a retired feature in all Salesforce orgs.
ExecutionUserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Used in Legacy Transaction Security only. The ID of an active user who is assigned the Modify All Data and View Setup user permissions. As of Summer '20, Legacy Transaction Security is a retired feature in all Salesforce orgs.
MasterLabel	Type string

Field	Details
	Properties Create, Filter, Group, Sort, Update Description The policy's name.  Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix associated with this object. Each Developer Edition organization that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values: - In Developer Edition organizations, the namespace prefix is set to the namespace prefix of the organization for all objects that support it. There is an exception if an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition organization of the package developer. - In organizations that are not Developer Edition organizations, NamespacePrefix is only set for objects that are part of an installed managed package. There is no namespace prefix for all other objects.
ResourceName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Used in Legacy Transaction Security only. A resource used to narrow down the conditions under which the policy triggers. For example, with a DataExport event, you can select a resource Lead to specifically monitor export activity occurring on your Lead entities. The resources available depend on the EventType field. As of Summer '20, Legacy Transaction Security is a retired feature in all Salesforce orgs.
State	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description Indicates whether the policy is active. Valid values are: • Disabled • Enabled
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of validation that the policy uses. The valid values are: • CustomApexPolicy— Created with Apex editor. • CustomConditionBuilderPolicy— Created with Condition Builder

TransactionSecurityEventLog

Transaction Security event logs contain details about policy execution. Legacy transaction security policy details are supported in API version 38.0 and later. Enhanced transaction security policy details are supported in API version 61.0 and later.

 **Note:** This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
ApexIdentifier	Type String Properties Filter, Group, Nillable, Sort Description The ID of the Apex code used to evaluate the policy.

Field	Details
BotIdentifier	Type String Description The ID of the bot.
BotSessionIdentifier	Type String Description The bot session ID.
ClientIp	Type String Properties Filter, Group, Nillable, Sort Description The IP address of the client that is using Salesforce services. A Salesforce internal IP, such as a login from AppExchange, is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.
CpuTime	Type Double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
EvaluationTime	Type Double Properties Filter, Nillable, Sort Description The time in milliseconds used to evaluate the policy.
EventName	Type String Properties Filter, Group, Nillable, Sort Description The name of the event, which is Transaction Security Event.
FlowIdentifier	Type String

Field	Details
	Properties Filter, Group, Nillable, Sort Description The ID of the flow used to evaluate the policy.
LoginKey	Type String Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: GeJCSym5eyvtEK2I.
PlannerIdentifier	Type String Description The ID of the agent planner.
PolicyIdentifier	Type String Properties Filter, Group, Nillable, Sort Description The 15-character ID of the policy being evaluated. For example: 00530000009M943.
PolicyOutcome	Type String Properties Filter, Group, Nillable, Sort Description The result of the transaction policy. Possible values are: • <code>Error</code>—The policy caused an undefined error when it executed. • <code>ExemptNoAction</code>—The user is exempt from transaction security policies, so the policy didn't trigger. • <code>MeteringBlock</code>—The policy took longer than 3 seconds to process, so the user was blocked from performing the operation. • <code>MeteringNoAction</code>—The policy took longer than 3 seconds to process, but the user isn't blocked from performing the operation. • <code>NoAction</code>—The policy didn't trigger.

Field	Details
	Notified—A notification was sent to the recipient.
PolicyType	Type String Properties Filter, Group, Nillable, Sort Description The real time action selected for the policy.
RequestIdentifier	Type String Properties Filter, Group, Nillable, Sort Description Globally unique id for a given request. For example: 3nWgxWbDKWWDIk0FKfF5DV.
Result	Type String Properties Filter, Group, Nillable, Sort Description The outcome of evaluating the policy. For example: NOT TRIGGERED.
RunTime	Type Double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds.
SendEmailNotification	Type Boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether to send an email notification. The default value is <code>false</code>.
SendInAppNotification	Type Boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description Indicates whether to send an in-app notification. The default value is <code>false</code> .
SessionKey	Type String Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.
Timestamp	Type DateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
TriggeredTimestamp	Type String Properties Filter, Group, Nillable, Sort Description The time at which the Transaction Security event was generated in ISO8601-compatible format. For example: 2015-07-27T11:32:59.555Z.
Uri	Type String Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: <code>/home/home.jsp</code> .
UserIdentifier	Type String Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who is using Salesforce services through the UI or the API. For example: 00530000009M943.

Translation

The Translation object represents the languages enabled for translation in your Salesforce org. This object is available in API version 47.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

- Your organization must be using Enterprise, Performance, Unlimited, or Developer edition.
- To view this object, you must have the “View Setup and Configuration” permission.
- To use the `create()`, `update()`, and `upsert()` calls, Translation Workbench must be enabled in your org.
- To manage translations, Translation Workbench must be enabled in your org. Specify translators for each language through the Translation Language Settings Setup page.

Fields

Field	Details
CanManage	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the language is available for translation (<code>true</code>) or not (<code>false</code>). Specify translators for each language through the Translation Language Setup page.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the translated values for this language display to users (<code>true</code>) or not (<code>false</code>).
Language	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The language code. See the Salesforce Help for a full list of languages and their codes.

TravelMode

Represents a travel mode used for travel time calculations. The records include information about the type of transportation (such as Car or Walking), whether a vehicle can take toll roads, and whether a vehicle is transporting hazardous materials. This object is available in API version 54.0 and later.

Fields

Field	Details
CanUseTollRoads	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if the vehicle is allowed to drive on toll roads. The default value is <code>false</code> .
IsLocked	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the travel model record is locked or not. The default value is <code>false</code> .
IsTransportingHazmat	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if the vehicle is transporting hazardous materials. The default value is <code>false</code> .
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (<code>LastReferencedDate=</code>) but not viewed it.
MayEdit	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the travel model record can be edited or not. The default value is <code>false</code>.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the travel mode.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of this object. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
TransportType	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description Type of transportation. Possible values are: • Bicycle • Car-Default. • Heavy Truck • Light Truck • Walking

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

TravelModeFeed

Feed tracking is available for the object.

TravelModeOwnerSharingRule

Sharing rules are available for the object.

TravelModeShare

Sharing is available for the object.

TwoFactorInfo

Stores a user's secret for multi-factor operations. Use this object when customizing multi-factor authentication in your organization. (Note that multi-factor authentication was formerly called two-factor authentication.) This object is available in API version 32.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

You need the Manage Multi-Factor Authentication in API permission to create or update this object.

Fields

Field Name	Details
SharedKey	Type string Properties Create, Group, Sort, Update Description This field is never read-enabled, though it is write-enabled. A request for this value always returns <code>null</code>. The value must be a base32-encoded string of a 20-byte secret. You can use the Apex method <code>Auth.SessionManagement.getQrCode()</code> to get a value to write to this field.  Note: If you write a secret to this field, in API version 37.0 and later the user gets an email notification that a new identity verification method was added to the user's account.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The multi-factor method. • TOTP—The time-based one-time password.
UserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID for the user who's associated with the authentication secret.

TwoFactorMethodsInfo

Stores information about which identity verification methods a user has registered. This object is available in API version 37.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

You need the Manage MFA in API user permission to access this object. Note that multi-factor authentication (MFA) was formerly called two-factor authentication.

If you try to use [Apex DML operations](#) and then query this object in the same call, you get an `UncommittedWork` error with this description.

A callout was unsuccessful because of pending uncommitted work related to a process, flow, or Apex operation.
Commit or roll back the work, and then try again.

To avoid this error, execute DML operations and queries in separate, asynchronous calls.

Fields

Field Name	Details
ExternalId	Type string Properties Filter, Group, Nillable, Sort Description A unique system-generated numerical identifier for the user.
HasBuiltInAuthenticator	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, the user has registered a built-in authenticator on their device, such as Touch ID or Windows Hello. The user can verify their identity by using the built-in authenticator. This field is available in API version 53.0 and later.
HasSalesforceAuthenticator	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, the user has connected the Salesforce Authenticator mobile app. The user can verify identity by approving a notification sent to the app. If the user sets a trusted location in the app, Salesforce Authenticator verifies automatically when the user is in the trusted location.
HasSecurityKey	Type boolean

Field Name	Details
	Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, the user has registered a WebAuthn-compatible security key. This field includes all security keys registered or used after Summer '22. The user can verify their identity by inserting the security key into a USB port to generate credentials.
HasTempCode	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, the user has a temporary verification code generated by a Salesforce admin or user with Manage Multi-Factor Authentication in User Interface permission.
HasTotp	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, the user has connected an authenticator app that generates verification codes, also known as time-based one-time passwords (TOTP). The user can verify identity by entering a code generated by the app.
HasU2F	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, the user has registered a U2F security key. The user can verify identity by inserting the security key into a USB port to generate credentials.  Note: For U2F security keys registered or used after Summer '22, use <code>HasSecurityKey</code> instead.
HasUserVerifiedEmailAddress	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, the user's email address is verified. This parameter is available in API version 43.0 and later.

Field Name	Details
HasUserVerifiedMobileNumber	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, the user has self-registered and verified a mobile phone number. Salesforce can text a verification code to the user at that number. This parameter is available in API version 43.0 and later.
HasVerifiedMobileNumber	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, the user has a mobile phone number that was added by an administrator or self-registered by the user. Salesforce can text a verification code to the user at that number.
UserId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the user who's associated with the identity verification methods.

Usage

In API version 34.0 and later, this object was enhanced to help manage high instance counts. A `query()` call returns up to 500 rows. A `queryMore()` call returns 500 more, up to 2,500 total. No more records are returned after 2,500.

To make sure that you don't miss any records, issue a `COUNT()` query in a `SELECT` clause for `TwoFactorMethodInfo`. This query gives you the total number of records. If there are more than 2,500 records, use these options to manage your results.

- Divide queries by filtering on fields like `UserId` to return subsets of less than 2,500 records.
- Use `OFFSET` to get batches of 2,000 records. Start with an `OFFSET` of 0 and then increment by 2,000. If you use this option, we recommend that you also use `LIMIT` to limit each query to 2,000.



Note: The `OFFSET` clause is limited to 2,000 rows. Requesting an offset greater than 2,000 results in a `NUMBER_OUTSIDE_VALID_RANGE` error.

For example, use an initial query with this structure.

```
SELECT <desired fields> FROM TwoFactorMethodInfo LIMIT 2000 OFFSET 0
```

Then, run another query with an offset of 2,000.

```
SELECT <desired fields> FROM TwoFactorMethodsInfo LIMIT 2000 OFFSET 2000
```

Continue to increase the offset by 2,000 until you have results for all records.

TwoFactorTempCode

Stores information about a user's temporary verification code for confirming their identity when logging in. This object is available in API version 37.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

You need the Manage Multi-Factor Authentication in API permission to access this object. (Note that multi-factor authentication was formerly called two-factor authentication.)

Fields

Field Name	Details
Expiration	Type dateTime Properties Filter, Sort Description The date and time when the temporary verification code expires. The code expires in 1 to 24 hours after it's generated. Salesforce admins and non-admin users with the Manage Multi-Factor Authentication in User Interface permission set the expiration time when generating the code.
Identifier	Type string Properties Filter, Group, Sort Description The unique identifier for the temporary code. This is a required field that can take any value.
TempCode	Type encryptedstring

Field Name	Details
	Description A request for this value always returns <code>null</code> .
UserId	Type reference Properties Filter, Group, Sort Description The ID for the user who's associated with the temporary verification code.

UiAgentInteractionEventLog

This log tracks client side interactions and events with the Agentforce panel. It is limited to Salesforce Lightning Experience, Salesforce Mobile, and Conversation Preview within Agentforce Builder. This object is available in API version 65.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
AgentType	Type string Properties Filter, Group, Nillable, Sort Description The type of agent.
AppName	Type string Properties Filter, Group, Nillable, Sort Description The app this logline has executed.

Field	Details
BotIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique identifier of the agent.
BotSessionIdentifier	Type string Properties Filter, Group, Nillable, Sort Description Returned with every session (from bots runtime API). The session begins with co-pilot panel is opened and ends when the user logs out of Salesforce, closes the browser tab or exits the browser. For mobile, this id is present throughout the entire time the app is open, and only changes upon cold start or logout.
BrowserName	Type string Properties Filter, Group, Nillable, Sort Description The name of the browser.
BrowserVersion	Type string Properties Filter, Group, Nillable, Sort Description Browser major.minor version. Some browsers may not provide a minor version.
ButtonLabel	Type string Properties Filter, Group, Nillable, Sort Description When the user interacts with a message by clicking a message-level button, this is the label of the button the user selects.
Channel	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The name of the channel. For example, mobile, LEX, or Playground.
ClientGeolocation	Type string Properties Filter, Group, Nillable, Sort Description Client geographic location in format Country/State.
ClientIdentifier	Type string Properties Filter, Group, Nillable, Sort Description API client ID.
ClientIp	Type string Properties Filter, Group, Nillable, Sort Description Client IP address.
Components	Type textarea Properties Nillable Description An array of strings that contain the names of the components, including the namespace and the name of the component. This should include both input and output components.
ConnectionType	Type string Properties Filter, Group, Nillable, Sort Description The type of connection. For example, WiFi.

Field	Details
DeviceModel	Type string Properties Filter, Group, Nillable, Sort Description The device model.
DevicePlatform	Type string Properties Filter, Group, Nillable, Sort Description The application experience
DeviceSessionIdentifier	Type string Properties Filter, Group, Nillable, Sort Description Auto-generated ID on the client-side that stays the same for the duration of the browser tab.
FeedbackIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The turn ID from Agents V1 API.
HasToxicityWarning	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Flag to identify whether the message contains a toxicity warning. The default value is <code>false</code> .
IsAgentPanelExited	Type boolean Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description A boolean field that is true if the user clicks on a button to navigate away from an agent panel. The default value is <code>false</code>.
LightningType	Type textarea Properties Nilable Description An array of strings that contains the name of the ES type(s).
LightningTypeMessage	Type string Properties Filter, Nilable, Sort Description This is the ES type message associated with the co-pilot response (i.e. "Inform" or "Inquire")
LoginKey	Type string Properties Filter, Group, Nilable, Sort Description The hash of the login id to allow tracking of all events from user login to logout.
MessageIdentifier	Type string Properties Filter, Group, Nilable, Sort Description Returned with every message (from bots runtime API).
MobileSdkAppType	Type string Properties Filter, Group, Nilable, Sort Description The mobile application type.
MobileSdkVersion	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The SDK version.
ObjectType	Type string Properties Filter, Group, Nillable, Sort Description The name of the object for ES Type recordInfo.
OperatingSystemName	Type string Properties Filter, Group, Nillable, Sort Description The name of the operating system.
OperatingSystemVersion	Type string Properties Filter, Group, Nillable, Sort Description The operating system version number.
PageContext	Type string Properties Filter, Group, Nillable, Sort Description Name of the component hosting the main content of the page.
PageObjectIdentifier	Type string Properties Filter, Group, Nillable, Sort Description Object id, if any, of the record being displayed.
PageObjectType	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description Object type of the page being displayed.
PageUrl	Type string Properties Filter, Group, Nillable, Sort Description Raw url of the page log occurred on.
RequestIdIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.
SdkAppVersion	Type string Properties Filter, Group, Nillable, Sort Description The SDK app version this logline has executed.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The hash of the session id to allow tracking of all events in a session.
TaskName	Type string Properties Filter, Group, Nillable, Sort Description This will describe the nature of the event being logged.

Field	Details
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description Timestamp at which the log event was generated.
UiEventElapsedTime	Type double Properties Filter, Nillable, Sort Description The elapsed time for the UI event.
UiEventTimestamp	Type dateTime Properties Filter, Nillable, Sort Description Time when the message was logged according to the client.
UiRootActivityIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID for the root activity, if any, when this message was logged.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The user ID of the request.
UserType	Type string Properties Filter, Group, Nillable, Sort Description The type of user.

Field	Details
VoiceOrText	Type string Properties Filter, Group, Nillable, Sort Description Whether the input by the user was “voice” or “text”.

UiFormulaCriterion

Represents a filter that helps define component visibility on a Lightning page. This object is available in API version 47.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
LeftHandSide	Type string Properties Filter, Group, Sort Description Represents the field that the filter is based on. For example, <code>AMOUNT</code> .
OperatorId	Type string Properties Filter, Group, Nillable, Sort Description Represents the filter operator. Valid values are: • <code>CONTAINS</code> • <code>EQUAL</code> • <code>GE</code>—greater than or equal • <code>GT</code>—greater than • <code>LE</code>—less than or equal • <code>LT</code>—less than • <code>NE</code>—not equal

Field	Details
	This is a relationship field. Relationship Name Operator Relationship Type Lookup Refers To null
ParentKeyPrefix	Type string Properties Filter, Group, Nillable, Sort Description Represents the three-digit prefix of the parent ID.
RightHandSide	Type string Properties Filter, Group, Nillable, Sort Description Represents the value used to evaluate the component's visibility. For example, 1000000.
RuleId	Type reference Properties Filter, Group, Sort Description Represents the formula rule ID. This is a relationship field. Relationship Name Rule Relationship Type Lookup Refers To UiFormulaRule

UiFormulaRule

Represents a set of one or more filters that define the conditions under which a component displays on a Lightning page. This object is available in API version 47.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
AssociatedElementId	Type reference Properties Filter, Group, Nillable, Sort Description Represents a parent component that UiFormulaRule is associated with, such as PromptVersion. This is a relationship field. Relationship Name AssociatedElement Relationship Type Lookup Refers To PromptVersion
BooleanFilter	Type string Properties Filter, Group, Nillable, Sort Description Represents the filter logic applied to UiFormulaRule. References the UI formula rule stored by UiFormulaCriterion based on the sortIndex, such as ((1 && 3) 2).
DeveloperName	Type string Properties Filter, Group, Sort Description Represents the API name of the UiFormulaRule.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Formula	Type textarea Properties Nillable

Field	Details
	Description Represents the formula source string of UiFormulaRule.
Language	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Represents the language of the UiFormulaRule.
MasterLabel	Type string Properties Filter, Group, Sort Description Required. Represents the label of the UiFormulaRule.
ParentKeyPrefix	Type string Properties Filter, Group, Nillable, Sort Description Represents the three-digit prefix for AssociatedElementId.

UiTelemetryNavTmEventLog

UI Telemetry Navigation Timing events capture network performance metrics related to page navigation. The event extends from the [UI Telemetry Resource Timing Event](#) on page 2412 and includes requests initiated with either the [Fetch API](#) or the [XMLHttpRequest API](#). This object is available in API version 64.0 and later.



Note: This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
AppName	Type string Properties Filter, Group, Nillable, Sort Description The name of the application that the user accessed.
BrowserName	Type string Properties Filter, Group, Nillable, Sort Description The name of the browser that the user accessed.
BrowserVersion	Type string Properties Filter, Group, Nillable, Sort Description The version of the browser that the user accessed in <code>major.minor version</code> format. Some browsers don't provide a minor version.
ClientGeolocation	Type string Properties Filter, Group, Nillable, Sort Description The geolocation of the client in the form of <code><Country>/<State Province></code> .
ClientIdentifier	Type string Properties Filter, Group, Nillable, Sort Description
ClientIp	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The IP address of the client that's using Salesforce services. A Salesforce internal IP, such as a login from AppExchange, is shown as <code>Salesforce.com</code> IP.
ConnectEnd	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser establishes a connection to a server so that it can retrieve a resource. To calculate the Transport Control Protocol (TCP) handshake time, subtract the <code>CONNECT_START</code> time from the <code>CONNECT_END</code> time.
ConnectStart	Type double Properties Filter, Nillable, Sort Description The time in milliseconds after the browser completes the Domain Name System (DNS) lookup and begins connecting to a server so that it can retrieve a resource. To calculate the Transport Control Protocol (TCP) handshake time, subtract the <code>CONNECT_START</code> time from the <code>CONNECT_END</code> time.
ConnectionType	Type string Properties Filter, Group, Nillable, Sort Description The type of connection.
DecodedBodySize	Type double Properties Filter, Nillable, Sort Description The size in octets of the HTTP message body after the removal of any applied content encoding.
DeviceModel	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The name of the device model.
DevicePlatform	Type string Properties Filter, Group, Nillable, Sort Description The type of application experience in <code>name:experience:form</code> format.
DeviceSessionIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique identifier of the user's session based on page load time. When the user reloads a page, a new session is started.
DomComplete	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the page's <code>readyState</code> property is set to <code>complete</code> . Indicates that the page and its subresources have finished loading.
DomContentLoadedEventEnd	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the page's <code>DOMContentLoaded</code> event handler completes. To calculate the processing time for the <code>DOMContentLoaded</code> event handler, subtract the <code>DOM_CONTENT_LOADED_EVENT_START</code> time from the <code>DOM_CONTENT_LOADED_EVENT_END</code> time.
DomContentLoadedEventStart	Type double

Field	Details
	Properties Filter, Nillable, Sort Description The time in milliseconds when the page's <code>DOMContentLoaded</code> event handler starts. To calculate the processing time for the <code>DOMContentLoaded</code> event handler, subtract the <code>DOM_CONTENT_LOADED_EVENT_START</code> time from the <code>DOM_CONTENT_LOADED_EVENT_END</code> time.
<code>DomInteractive</code>	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the page's <code>readyState</code> is set to <code>interactive</code>. Indicates that the page has finished loading, but subresources, such as images and scripts, are still loading.
<code>DomainLookupEnd</code>	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser completes a DNS lookup for a resource. To calculate the DNS lookup time, subtract the <code>DOMAIN_LOOKUP_START</code> time from the <code>DOMAIN_LOOKUP_END</code> time.
<code>DomainLookupStart</code>	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser starts a DNS lookup for a resource. To calculate the DNS lookup time, subtract the <code>DOMAIN_LOOKUP_START</code> time from the <code>DOMAIN_LOOKUP_END</code> time.
<code>Duration</code>	Type double Properties Filter, Nillable, Sort

Field	Details
	Description The total duration in milliseconds of the event from the <code>START_TIME</code> to the <code>LOAD_EVENT_END</code> time.
EncodedBodySize	Type double Properties Filter, Nillable, Sort Description The size in octets of the HTTP message body before the removal of any applied content encoding.
FetchStart	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser starts to fetch a resource from the server, not including redirects. Occurs before the DNS lookup and the connection to the server is established. To calculate the total time used to fetch a resource without redirects, subtract the <code>FETCH_START</code> time from the <code>RESPONSE_END</code> time.
FirstInterimResponseStart	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser receives the first byte of the interim 1xx response from the server. To calculate the time from when the browser sends a request to when it starts to receive an interim response, subtract the <code>REQUEST_START</code> time from the <code>FIRST_INTERIM_RESPONSE_START</code> time.
InitiatorType	Type string Properties Filter, Group, Nillable, Sort Description The HTML element that initiates the resource load.

Field	Details
LoadEventEnd	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the page's load event handler completes. To calculate the processing time for the load event handler, subtract the LOAD_EVENT_START time from the LOAD_EVENT_END time.
LoadEventStart	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the page's load event handler begins. To calculate the processing time for the load event handler, subtract the LOAD_EVENT_START time from the LOAD_EVENT_END time.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a user's login session. It starts with a login event and ends with either a logout event or the user session expiring.
MobileSdkAppType	Type string Properties Filter, Group, Nillable, Sort Description The mobile application type.
MobileSdkVersion	Type string Properties Filter, Group, Nillable, Sort Description Mobile SDK version number.

Field	Details
NavigationType	Type string Properties Filter, Group, Nillable, Sort Description The type of navigation timing data. Possible Values • <code>navigate</code>: a user interaction or a script initiated navigation. • <code>reload</code>: a reload initiated navigation. • <code>back_forward</code>: navigation traverses the browser's history. • <code>prerender</code>: a prerender hint initiated navigation.
NextHopProtocol	Type string Properties Filter, Group, Nillable, Sort Description The Application-Layer Protocol Negotiation (ALPN) Protocol ID that fetches the resource. Possible Values <code>http/0.9</code>, <code>http/1.0</code>, <code>h2</code>, <code>h2c</code>, <code>h3</code>
OperatingSystemName	Type string Properties Filter, Group, Nillable, Sort Description The operating system name, derived from <code>USER_AGENT</code>.
OperatingSystemVersion	Type string Properties Filter, Group, Nillable, Sort Description The operating system version, derived from <code>USER_AGENT</code>.
PageContext	Type string Properties Filter, Group, Nillable, Sort Description The name of the component hosting the main content of the page.

Field	Details
PageObjectIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique object identifier of the event.
PageObjectType	Type string Properties Filter, Group, Nillable, Sort Description The object type of the event.
PageUrl	Type string Properties Filter, Group, Nillable, Sort Description The relative URL of the top-level Lightning Experience page that the user opened. The page can contain one or more Lightning components. Multiple record IDs can be associated with PAGE_URL.
RedirectCount	Type int Properties Filter, Group, Nillable, Sort Description The total number of redirects since the last non-redirect navigation in the current browsing context.
RedirectEnd	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser receives the last byte of the response of the final redirect. To calculate the total redirection time, subtract the REDIRECT_START time from the REDIRECT_END time.

Field	Details
RedirectStart	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser starts to fetch a resource that initiates a redirect. To calculate the total redirection time, subtract the REDIRECT_START time from the REDIRECT_END time.
RenderBlockingStatus	Type string Properties Filter, Group, Nillable, Sort Description The status that indicates whether the resource can block or delay the browser from rendering page content.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.
RequestStart	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser starts to request the resource from the server. To calculate the total request time, subtract the REQUEST_START time from the RESPONSE_START time.
ResponseEnd	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser receives the resource's last byte or when the transport connection closes, whichever comes first.

Field	Details
	To calculate the total time used to fetch a resource without redirects, subtract the <code>FETCH_START</code> time from the <code>RESPONSE_END</code> time.
ResponseStart	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser receives the first byte of the response from the server. To calculate the total request time, subtract the <code>REQUEST_START</code> time from the <code>RESPONSE_START</code> time.
ResponseStatus	Type double Properties Filter, Nillable, Sort Description The HTTP response status code.
SdkAppVersion	Type string Properties Filter, Group, Nillable, Sort Description The mobile SDK application version.
SecureConnectionStart	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser begins the handshake process that secures the connection.
ServerRequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The request ID for the server request that's used to find associated server logs.

Field	Details
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all events in Lightning Experience within a session. When the user logs out and logs in again, a new session starts.
StartTime	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser starts to fetch the resource, including redirects.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT.
TransferSize	Type double Properties Filter, Nillable, Sort Description The size in octets of the resource, including the response header and the response payload body.
UiEventElapsedTime	Type double Properties Filter, Nillable, Sort Description The difference in milliseconds between when the event is logged and when the browser tab is opened.
UiEventTimestamp	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The time at which this event occurs, measured in milliseconds.
UiRootActivityIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the root activity when the event occurs.
UiThreadResponseDelay	Type double Properties Filter, Nillable, Sort Description The time in milliseconds from when the browser receives the response to when it executes the callback. This delay occurs if the main Javascript thread is busy when the response is received.
UnloadEventEnd	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the page's <code>unload</code> event handler completes. To calculate the processing time for the <code>unload</code> event handler, subtract the <code>UNLOAD_EVENT_START</code> time from the <code>UNLOAD_EVENT_END</code> time.
UnloadEventStart	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the page's <code>unload</code> event handler starts. To calculate the processing time for the <code>unload</code> event handler, subtract the <code>UNLOAD_EVENT_START</code> time from the <code>UNLOAD_EVENT_END</code> time.
Url	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The URL of the request.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user accessing Salesforce services through the UI or API.
UserType	Type string Properties Filter, Group, Nillable, Sort Description The category of user license of the user accessing Salesforce services through the UI or API.
WorkerStart	Type double Properties Filter, Nillable, Sort Description If a service worker is installed, the time in milliseconds when the active service worker receives the <code>fetch</code> event. To measure the service worker processing time, subtract the <code>WORKER_START</code> time from the <code>FETCH_START</code> time.

UiTelemetryRsrcTmEventLog

UI Telemetry Resource Timing events capture network performance metrics related to loading an application's resources. The event includes requests initiated with either the [Fetch API](#) or the [XMLHttpRequest API](#). This object is available in API version 64.0 and later.



Note: This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
AppName	Type string Properties Filter, Group, Nillable, Sort Description The name of the application that the user accessed.
BrowserName	Type string Properties Filter, Group, Nillable, Sort Description The name of the browser that the user accessed.
BrowserVersion	Type string Properties Filter, Group, Nillable, Sort Description The version of the browser that the user accessed in <code>major.minor version</code> format. Some browsers don't provide a minor version.
ClientGeolocation	Type string Properties Filter, Group, Nillable, Sort Description The geolocation of the client in the form of <code><Country>/<State Province></code>.
ClientIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The API client ID.
ClientIp	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The IP address of the client that's using Salesforce services. A Salesforce internal IP, such as a login from AppExchange, is shown as "Salesforce.com IP."
ConnectEnd	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser establishes a connection to a server so that it can retrieve a resource. To calculate the Transport Control Protocol (TCP) handshake time, subtract the <code>CONNECT_START</code> time from the <code>CONNECT_END</code> time.
ConnectStart	Type double Properties Filter, Nillable, Sort Description The time in milliseconds after the browser completes the Domain Name System (DNS) lookup and begins connecting to a server so that it can retrieve a resource. To calculate the Transport Control Protocol (TCP) handshake time, subtract the <code>CONNECT_START</code> time from the <code>CONNECT_END</code> time.
ConnectionType	Type string Properties Filter, Group, Nillable, Sort Description The type of connection.
DecodedBodySize	Type double Properties Filter, Nillable, Sort Description The size in octets of the HTTP message body after the removal of any applied content encoding.
DeviceModel	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The name of the device model.
DevicePlatform	Type string Properties Filter, Group, Nillable, Sort Description The type of application experience in <code>name:experience:form</code> format.
DeviceSessionIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique identifier of the user's session based on page load time. When the user reloads a page, a new session is started.
DomainLookupEnd	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser completes a DNS lookup for a resource. To calculate the DNS lookup time, subtract the <code>DOMAIN_LOOKUP_START</code> time from the <code>DOMAIN_LOOKUP_END</code> time.
DomainLookupStart	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser starts a DNS lookup for a resource. To calculate the DNS lookup time, subtract the <code>DOMAIN_LOOKUP_START</code> time from the <code>DOMAIN_LOOKUP_END</code> time.
Duration	Type double

Field	Details
	Properties Filter, Nillable, Sort Description The total duration in milliseconds of the event from the <code>START_TIME</code> to the <code>RESPONSE_END</code> time.
EncodedBodySize	Type double Properties Filter, Nillable, Sort Description The size in octets of the HTTP message body before the removal of any applied content encoding.
FetchStart	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser starts to fetch a resource from the server, not including redirects. Occurs before the DNS lookup and the connection to the server is established. To calculate the total time used to fetch a resource without redirects, subtract the <code>FETCH_START</code> time from the <code>RESPONSE_END</code> time.
FirstInterimResponseStart	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser receives the first byte of the interim 1xx response from the server. To calculate the time from when the browser sends a request to when it starts to receive an interim response, subtract the <code>REQUEST_START</code> time from the <code>FIRST_INTERIM_RESPONSE_START</code> time.
InitiatorType	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The HTML element that initiates the resource load.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a user's login session. It starts with a login event and ends with either a logout event or the user session expiring.
MobileSdkAppType	Type string Properties Filter, Group, Nillable, Sort Description The mobile application type.
MobileSdkVersion	Type string Properties Filter, Group, Nillable, Sort Description Mobile SDK version number.
NextHopProtocol	Type string Properties Filter, Group, Nillable, Sort Description The ALPN Protocol ID.
OperatingSystemName	Type string Properties Filter, Group, Nillable, Sort Description The name of the operating system.
OperatingSystemVersion	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The operating system version number.
PageContext	Type string Properties Filter, Group, Nillable, Sort Description The name of the component hosting the main content of the page.
PageObjectIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique object identifier of the event.
PageObjectType	Type string Properties Filter, Group, Nillable, Sort Description The object type of the event.
PageUrl	Type string Properties Filter, Group, Nillable, Sort Description Relative URL of the top-level Lightning Experience page that the user opened. The page can contain one or more Lightning components. Multiple record IDs can be associated with PAGE_URL.
RedirectEnd	Type double Properties Filter, Nillable, Sort

Field	Details
	Description The time in milliseconds when the browser receives the last byte of the response of the final redirect. To calculate the total redirection time, subtract the REDIRECT_START time from the REDIRECT_END time.
RedirectStart	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser starts to fetch a resource that initiates a redirect. To calculate the total redirection time, subtract the REDIRECT_START time from the REDIRECT_END time.
RenderBlockingStatus	Type string Properties Filter, Group, Nillable, Sort Description The status that indicates whether the resource can block or delay the browser from rendering page content.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.
RequestStart	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser starts to request the resource from the server. To calculate the total request time, subtract the REQUEST_START time from the RESPONSE_START time.

Field	Details
ResponseEnd	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser receives the resource's last byte or when the transport connection closes, whichever comes first. To calculate the total time used to fetch a resource without redirects, subtract the <code>FETCH_START</code> time from the <code>RESPONSE_END</code> time.
ResponseStart	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser receives the first byte of the response from the server. To calculate the total request time, subtract the <code>REQUEST_START</code> time from the <code>RESPONSE_START</code> time.
ResponseStatus	Type double Properties Filter, Nillable, Sort Description The HTTP response status code.
SdkAppVersion	Type string Properties Filter, Group, Nillable, Sort Description The mobile SDK application type. Possible Values • HYBRID • HYBRIDLOCAL • HYBRIDREMOTE • NATIVE • REACTNATIVE

Field	Details
SecureConnectionStart	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser begins the handshake process that secures the connection.
ServerRequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The requestId for the server request that's used to find associated server logs.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all events in Lightning Experience within a session. When the user logs out and logs in again, a new session starts.
StartTime	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the browser starts to fetch the resource, including redirects.
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT.
TransferSize	Type double Properties Filter, Nillable, Sort

Field	Details
	Description The size in octets of the resource, including the response header and the response payload body.
UiEventElapsedTime	Type double Properties Filter, Nillable, Sort Description The difference in milliseconds between when the message was logged and when the browser tab started meaning
UiEventTimestamp	Type dateTime Properties Filter, Nillable, Sort Description The difference in milliseconds between when the event is logged and when the browser tab is opened.
UiRootActivityIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The ID of the root activity when the event occurs.
UiThreadResponseDelay	Type double Properties Filter, Nillable, Sort Description The time in milliseconds from when the browser receives the response to when it executes the callback. This delay occurs if the main Javascript thread is busy when the response is received.
Url	Type string Properties Filter, Group, Nillable, Sort Description The URL of the request.

Field	Details
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user accessing Salesforce services through the UI or API.
UserType	Type string Properties Filter, Group, Nillable, Sort Description The category of user license of the user accessing Salesforce services through the UI or API.
WorkerStart	Type double Properties Filter, Nillable, Sort Description The time in milliseconds when the active service worker receives the <code>fetch</code> event, if a service worker is installed. To measure the service worker processing time, subtract the <code>WORKER_START</code> time from the <code>FETCH_START</code> time.

UndecidedEventRelation

Represents event participants (invitees or attendees) with the status `Not Responded` for a given event. This object is available in API versions 29.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field Name	Details
EventId	Type reference

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description Indicates the ID of the event. This is a relationship field. Relationship Name Event Relationship Type Lookup Refers To Event
RelationId	Type reference Properties Filter, Group, Nillable, Sort Description Indicates the ID of the invitee. This is a polymorphic relationship field. Relationship Name Relation Relationship Type Lookup Refers To Calendar, Contact, Lead, User
RespondedDate	Type dateTime Properties Filter, Nillable, Sort Description This field is always null.
Response	Type string Properties Filter, Group, Nillable, Sort Description Indicates the content of the response field. Label is Comment.

Field Name	Details
Type	Type string Properties Filter, Group, Nillable, Sort Description Indicates whether the invitee is a user, lead or contact, or resource.

Usage

Query invitees who have not responded to an invitation to an event

```
SELECT eventId, type, response FROM UndecidedEventRelation WHERE  
eventId='00UTD000000ZH5LA'
```

SEE ALSO:

[AcceptedEventRelation](#)

[DeclinedEventRelation](#)

UnifiedActivity

Represents an activity that is automatically captured from Einstein Activity Capture (EAC) or other activity data, such as calls, manually logged tasks, and emails. This object consists of fields common to all types of activity-related objects such as Event, Task, EmailMessage, VoiceCall, VideoCall, and so on. This object is available for reports and dashboards in the Winter '24 release and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

 **Note:** This object is available only for reporting. It isn't supported for SOQL queries and APIs.

Special Access Rules

We're retiring Einstein Activity Capture Activity 360 Reporting. Starting in Summer '25, this object isn't available with Einstein Activity Capture unless Activity 360 Reporting was enabled in your org in Spring '25 or earlier. See Knowledge Article: [Einstein Activity Capture Activity 360 Reporting, Activity Metrics, Activities Dashboard Upcoming Retirement](#)

Fields

Field	Details
ActivityDateTime	Type dateTime

Field	Details
	Properties Filter, Sort Description The date and time of the activity in the Coordinated Universal Time (UTC) time zone.
ActivitySubType	Type picklist Properties Filter, Nillable, Restricted picklist Description Provides standard subtypes to facilitate creating and searching for specific activity subtypes. Possible values are: • Captured • LegacyCall • Streamed • VoiceCall
ActivityType	Type picklist Properties Filter, Nillable, Restricted picklist Description The type of activity. Possible values are: • UnifiedActivity • UnifiedEmail • UnifiedMeeting • UnifiedTask • UnifiedVideoCall • UnifiedVoiceCall
DetailId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the object that contains detailed activity-specific information. The object depends on the activity type. For example, the detail for a Task activity is a Task object. The detail for an Event activity is an Event object. This field is a polymorphic relationship field.

Field	Details
	Relationship Name Detail Relationship Type Lookup Refers To EmailMessage, Event, Task, VideoCall, VoiceCall
InternalEventKey	Type string Properties Filter, Group, Nillable, Sort Description Reserved for internal use.
IsInsightAvailable	Type boolean Properties Defaulted on create, Filter Description Indicates whether the activity has an insight associated with it (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
Snippet	Type string Properties Nillable Description An abbreviation of the activity body or description. This field has a maximum length of 255 characters.
Subject	Type string Properties None Description Contains the subject of the task or event.

UnifiedActivityInsight

Represents an insight related to a unified activity. This object is available for reports and dashboards in the Winter '24 release and later.

Supported Calls

```
describeSObjects(), query()
```

 **Note:** This object is available only for reporting. It isn't supported for SOQL queries and APIs.

Special Access Rules

We're retiring Einstein Activity Capture Activity 360 Reporting. Starting in Summer '25, this object isn't available with Einstein Activity Capture unless Activity 360 Reporting was enabled in your org in Spring '25 or earlier. See Knowledge Article: [Einstein Activity Capture Activity 360 Reporting, Activity Metrics, Activities Dashboard Upcoming Retirement](#)

Fields

Field	Details
ActivityId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the unified activity that this insight is associated with. This field is a polymorphic relationship field. Relationship Name Activity Relationship Type Lookup Refers To UnifiedActivity, UnifiedEmail, UnifiedMeeting, UnifiedTask, UnifiedVideoCall, UnifiedVoiceCall
AggregatedKeywordOccurrences	Type int Properties Filter, Nillable, Sort Description The number of keyword occurrences that triggered this insight. This field is the sum of occurrences for all the attached UnifiedActivityInsightKeyword objects.
InsightType	Type string Properties Filter, Nillable, Sort Description Type of the insight.

Field	Details
OwnerId	Type reference Properties Filter, Group, Nillable, Sort Description Optional. ID of the owner of the insight. Only user-scoped insights have owners (Scope=USER). This field is a relationship field. Relationship Name Owner Relationship Type Lookup Refers To User
Scope	Type picklist Properties Filter, Nillable, Restricted picklist, Sort Description The scope of the insight. Possible values are: ORG USER

UnifiedActivityParticipant

Represents a participant in an activity. For example, a participant in a voice call is someone who initiated the call or someone who received the call.This object is available for reports and dashboards in the Winter '24 release and later.

Supported Calls

describeSObjects(), query(), retrieve()

 **Note:** This object is available only for reporting. It isn't supported for SOQL queries and APIs.

Special Access Rules

We're retiring Einstein Activity Capture Activity 360 Reporting. Starting in Summer '25, this object isn't available with Einstein Activity Capture unless Activity 360 Reporting was enabled in your org in Spring '25 or earlier. See Knowledge Article: [Einstein Activity Capture Activity 360 Reporting, Activity Metrics, Activities Dashboard Upcoming Retirement](#)

Fields

Field	Details
ActivityId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the activity that the person participated in. This field is a polymorphic relationship field. Relationship Name Activity Relationship Type Lookup Refers To UnifiedActivity, UnifiedEmail, UnifiedMeeting, UnifiedTask, UnifiedVideoCall, UnifiedVoiceCall
ChannelAddress	Type string Properties Filter, Nillable Description The channel-specific address used to identify the participant in an external communication. For example, an email address in an email or a phone number in a voice call. The value is captured at the time of the communication; it doesn't change if the contact's email address or phone number is updated later.
ParticipantType	Type picklist Properties Filter, Nillable, Restricted picklist Description The role of the participant in the activity. Possible values are: - AssignedTo - Attendee

Field	Details
	- BCC - CC - From - OptionalAttendee - Organizer - To
PersonId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the person who participated in the activity. This field is a polymorphic relationship field. Relationship Name Person Relationship Type Lookup Refers To Contact, Lead, User

UnifiedActivityRelation

Represents a relationship between an activity and a related record that’s a target or topic of the activity. For example, a related record can be an opportunity, account, and so on. This object is available for reports and dashboards in the Winter ’24 release and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

 **Note:** This object is available only for reporting. It isn’t supported for SOQL queries and APIs.

Special Access Rules

We’re retiring Einstein Activity Capture Activity 360 Reporting. Starting in Summer ’25, this object isn’t available with Einstein Activity Capture unless Activity 360 Reporting was enabled in your org in Spring ’25 or earlier. See Knowledge Article: [Einstein Activity Capture Activity 360 Reporting, Activity Metrics, Activities Dashboard Upcoming Retirement](#)

Fields

Field	Details
ActivityId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the activity. This field is a polymorphic relationship field. Relationship Name Activity Relationship Type Lookup Refers To UnifiedActivity, UnifiedVideoCall, UnifiedVoiceCall
RelatedId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the related record. This field is a polymorphic relationship field. Relationship Name Related Relationship Type Lookup Refers To Account, Contact, Contract, Lead, Opportunity, User

UnifiedActvtyInsightKeyword

Represents a keyword in a communication that triggered the activity insight. This object is available for reports and dashboards in the Winter '24 release and later.

Supported Calls

describeSObjects(), query()

 **Note:** This object is available only for reporting. It isn't supported for SOQL queries and APIs.

Special Access Rules

We’re retiring Einstein Activity Capture Activity 360 Reporting. Starting in Summer ’25, this object isn’t available with Einstein Activity Capture unless Activity 360 Reporting was enabled in your org in Spring ’25 or earlier. See Knowledge Article: [Einstein Activity Capture Activity 360 Reporting, Activity Metrics, Activities Dashboard Upcoming Retirement](#)

Fields

Field	Details
InsightId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the activity insight associated with the keyword. This field is a relationship field. Relationship Name Insight Relationship Type Lookup Refers To UnifiedActivityInsight
Keyword	Type string Properties Filter, Nillable, Sort Description Keyword mentioned in the communication.
Occurrences	Type int Properties Filter, Nillable, Sort Description Number of times the keyword was mentioned in the communication.

UnifiedEmail

Represents an email that was captured or synced from an EmailMessage or Task record. This object is available for reports and dashboards in the Winter ’24 release and later.

 **Important:** Starting in Summer '25, this object isn't available unless Activity 360 Reporting was enabled in your org in Spring '25 or earlier. See Knowledge Article: [Einstein Activity Capture Activity 360 Reporting, Activity Metrics, Activities Dashboard Upcoming Retirement](#)

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

 **Note:** This object is available only for reporting. It isn't supported for SOQL queries and APIs.

Special Access Rules

Einstein Activity Capture and Activity 360 Reporting must be enabled.

Fields

Field	Details
ActivityDateTime	Type dateTime Properties Filter, Sort Description The date and time of the email in the Coordinated Universal Time (UTC) time zone.
ActivitySubType	Type picklist Properties Filter, Nillable, Restricted picklist Description Always blank for this object.
ActivityType	Type picklist Properties Filter, Nillable, Restricted picklist Description The type of activity. Possible value is <code>UnifiedEmail</code>.
DetailId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description The ID of the object that contains detailed activity-specific information. The object depends on the activity type. For example, the detail for a Task activity is a Task object. The detail for an Event activity is an Event object. If the email was captured from Einstein Activity Capture, this field returns a blank value. This field is a relationship field. Relationship Name Detail Relationship Type Lookup Refers To EmailMessage
Direction	Type picklist Properties Filter, Nillable, Restricted picklist Description The direction in which the email was sent or received. Possible values are: - Inbound - Internal - Outbound
InternalEventKey	Type string Properties Filter, Group, Nillable, Sort Description Reserved for internal use.
IsInsightAvailable	Type boolean Properties Defaulted on create, Filter Description Indicates whether the activity has an insight associated with it (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
IsPrivate	Type boolean

Field	Details
	Properties Defaulted on create Filter Description Indicates whether the activity's sensitive fields (Subject and Snippet) are masked (<code>true</code>) or visible (<code>false</code>) for non-owners. The default value is <code>false</code>.
Snippet	Type string Properties Nullable Description An abbreviation of the email content. This field has a maximum length of 255 characters.
Subject	Type string Properties None Description Contains the subject of the email.

UnifiedEmailParticipant

Represents a participant in an email. This object is available for reports and dashboards in the Winter '24 release and later.

 **Important:** Starting in Summer '25, this object isn't available unless Activity 360 Reporting was enabled in your org in Spring '25 or earlier. See Knowledge Article: [Einstein Activity Capture Activity 360 Reporting, Activity Metrics, Activities Dashboard Upcoming Retirement](#)

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

 **Note:** This object is available only for reporting. It isn't supported for SOQL queries and APIs.

Special Access Rules

Einstein Activity Capture and Activity 360 Reporting must be enabled.

Fields

Field	Details
ActivityId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the email the person is participating in. This field is a relationship field. Relationship Name Activity Relationship Type Lookup Refers To UnifiedEmail
ChannelAddress	Type string Properties Filter, Nillable Description Email address of the participant. The email address is captured at the time of the communication; it doesn't change if the contact's email address is updated later.
ParticipantType	Type picklist Properties Filter, Nillable, Restricted picklist Description Participant's role in the email. Possible values are: • AssignedTo • Attendee • BCC • CC • From • OptionalAttendee • Organizer • To

Field	Details
PersonId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the person participating in the email. This field is a polymorphic relationship field. Relationship Name Person Relationship Type Lookup Refers To Contact, Lead, User

UnifiedMeeting

Represents a meeting that was captured or synced from an Event record. This object is available for reports and dashboards in the Winter '24 release and later.

 **Important:** Starting in Summer '25, this object isn't available unless Activity 360 Reporting was enabled in your org in Spring '25 or earlier. See Knowledge Article: [Einstein Activity Capture Activity 360 Reporting, Activity Metrics, Activities Dashboard Upcoming Retirement](#)

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

 **Note:** This object is available only for reporting. It isn't supported for SOQL queries and APIs.

Special Access Rules

Einstein Activity Capture and Activity 360 Reporting must be enabled.

Fields

Field	Details
ActivityDateTime	Type dateTime Properties Filter, Sort

Field	Details
	Description The date and time of the meeting in the Coordinated Universal Time (UTC) time zone.
ActivitySubType	Type picklist Properties Filter, Nillable, Restricted picklist Description Always blank for this object.
ActivityType	Type picklist Properties Filter, Nillable, Restricted picklist Description The type of activity. Possible value is UnifiedMeeting.
DetailId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the object that contains detailed activity-specific information. The object depends on the activity type. For example, the detail for a Task activity is a Task object. The detail for an Event activity is an Event object. This field is a relationship field. Relationship Name Detail Relationship Type Lookup Refers To Event
InternalEventKey	Type string Properties Filter, Group, Nillable, Sort Description Reserved for internal use.

Field	Details
IsInsightAvailable	Typeboolean PropertiesDefaulted on create, Filter DescriptionIndicates whether the activity has an insight associated with it (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
Snippet	Typestring PropertiesNillable DescriptionAn abbreviation of the event description. This field has a maximum length of 255 characters.
Subject	Typestring PropertiesNone DescriptionContains the subject of the meeting.

UnifiedMeetingParticipant

Represents a participant in a meeting. This object is available for reports and dashboards in the Winter '24 release and later.

 **Important:** Starting in Summer '25, this object isn't available unless Activity 360 Reporting was enabled in your org in Spring '25 or earlier. See Knowledge Article: [Einstein Activity Capture Activity 360 Reporting, Activity Metrics, Activities Dashboard Upcoming Retirement](#)

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

 **Note:** This object is available only for reporting. It isn't supported for SOQL queries and APIs.

Special Access Rules

Einstein Activity Capture and Activity 360 Reporting must be enabled.

Fields

Field	Details
ActivityId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the meeting that the person is participating in. This field is a relationship field. Relationship Name Activity Relationship Type Lookup Refers To UnifiedMeeting
ChannelAddress	Type string Properties Filter, Nillable Description The email address of the participant. The email address is captured at the time of the communication; it doesn't change if the contact's email address is updated later.
ParticipantType	Type picklist Properties Filter, Nillable, Restricted picklist Description The participant's role in the meeting. Possible values are: - AssignedTo - Attendee - BCC - CC - From - OptionalAttendee - Organizer - To

Field	Details
PersonId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the contact, lead, or user participating in the meeting. This field is a polymorphic relationship field. Relationship Name Person Relationship Type Lookup Refers To Contact, Lead, User

UnifiedTask

Represents a business activity such as a to-do item. This object is available for reports and dashboards in the Winter '24 release and later.

 **Important:** Starting in Summer '25, this object isn't available unless Activity 360 Reporting was enabled in your org in Spring '25 or earlier. See Knowledge Article: [Einstein Activity Capture Activity 360 Reporting, Activity Metrics, Activities Dashboard Upcoming Retirement](#)

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

 **Note:** This object is available only for reporting. It isn't supported for SOQL queries and APIs.

Special Access Rules

Einstein Activity Capture and Activity 360 Reporting must be enabled.

Fields

Field	Details
ActivityDateTime	Type dateTime Properties Filter, Sort

Field	Details
	Description The date and time of the activity in the Coordinated Universal Time (UTC) time zone.
ActivitySubType	Type picklist Properties Filter, Nillable, Restricted picklist Description Always blank for this object.
ActivityType	Type picklist Properties Filter, Nillable, Restricted picklist Description The type of activity. Possible value is <code>UnifiedTask</code> .
DetailId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the object that contains detailed activity-specific information. The object depends on the activity type. For example, the detail for a Task activity is a Task object. This field is a relationship field. Relationship Name Detail Relationship Type Lookup Refers To Task
InternalEventKey	Type string Properties Filter, Group, Nillable, Sort Description Reserved for internal use.

Field	Details
IsInsightAvailable	Type boolean Properties Defaulted on create, Filter Description Indicates whether the activity has an insight associated with it (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
Snippet	Type string Properties Nullable Description An abbreviation of the task body or description. This field has a maximum length of 255 characters.
Subject	Type string Properties None Description The subject line of the task.

UnifiedTaskParticipant

Represents a participant in a task. This object is available for reports and dashboards in the Winter '24 release and later.

 **Important:** Starting in Summer '25, this object isn't available unless Activity 360 Reporting was enabled in your org in Spring '25 or earlier. See Knowledge Article: [Einstein Activity Capture Activity 360 Reporting, Activity Metrics, Activities Dashboard Upcoming Retirement](#)

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

 **Note:** This object is available only for reporting. It isn't supported for SOQL queries and APIs.

Special Access Rules

Einstein Activity Capture and Activity 360 Reporting must be enabled.

Fields

Field	Details
ActivityId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the activity the person is participating in. This field is a relationship field. Relationship Name Activity Relationship Type Lookup Refers To UnifiedTask
ChannelAddress	Type string Properties Filter, Nillable Description Username of the participant. The username is captured at the time of the communication; it doesn't change if the contact's username is updated later.
ParticipantType	Type picklist Properties Filter, Nillable, Restricted picklist Description The participant's role in the activity. Possible values are: • AssignedTo • Attendee • BCC • CC • From • OptionalAttendee • Organizer • To

Field	Details
PersonId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the contact, lead, or user participating in the activity. This field is a polymorphic relationship field. Relationship Name Person Relationship Type Lookup Refers To Contact, Lead, User

UnifiedVideoCall

Represents a video call that is captured or synced from the VideoCall or Task record. This object is available for reports and dashboards in the Winter '24 release and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

 **Note:** This object is available only for reporting. It isn't supported for SOQL queries and APIs.

Special Access Rules

We're retiring Einstein Activity Capture Activity 360 Reporting. Starting in Summer '25, this object isn't available with Einstein Activity Capture unless Activity 360 Reporting was enabled in your org in Spring '25 or earlier. See Knowledge Article: [Einstein Activity Capture Activity 360 Reporting, Activity Metrics, Activities Dashboard Upcoming Retirement](#)

Fields

Field	Details
ActivityDateTime	Type dateTime Properties Filter, Sort Description The date and time of the activity in the Coordinated Universal Time (UTC) time zone.

Field	Details
ActivitySubType	Type picklist Properties Filter, Nillable, Restricted picklist Description Provides standard subtypes to facilitate creating and searching for specific activity subtypes. Possible values are: • Captured • LegacyCall • Streamed • VoiceCall
ActivityType	Type picklist Properties Filter, Nillable, Restricted picklist Description The type of activity. Possible value is UnifiedVideoCall.
CallDurationInSeconds	Type int Properties Filter, Nillable Description The duration of the video call in seconds.
DetailId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the object that contains detailed activity-specific information. The object depends on the activity type. For example, the detail for a Task activity is a Task object. The detail for an Event activity is an Event object. This field is a relationship field. Relationship Name Detail Relationship Type Lookup

Field	Details
	Refers To VideoCall
InternalEventKey	Type string Properties Filter, Group, Nillable, Sort Description Reserved for internal use.
IsInsightAvailable	Type boolean Properties Defaulted on create, Filter Description Indicates whether the activity has an insight associated with it. The default value is <code>false</code> .
Snippet	Type string Properties Nillable Description An abbreviation of the activity body or description. This field has a maximum length of 255 characters.
Subject	Type string Properties None Description Contains the subject of the video call.

UnifiedVideoCallParticipant

Represents a participant in a video call. This object is available for reports and dashboards in the Winter '24 release and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

 **Note:** This object is available only for reporting. It isn't supported for SOQL queries and APIs.

Special Access Rules

We're retiring Einstein Activity Capture Activity 360 Reporting. Starting in Summer '25, this object isn't available with Einstein Activity Capture unless Activity 360 Reporting was enabled in your org in Spring '25 or earlier. See Knowledge Article: [Einstein Activity Capture Activity 360 Reporting, Activity Metrics, Activities Dashboard Upcoming Retirement](#)

Fields

Field	Details
ActivityId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the video call the person is participating in. This field is a relationship field. Relationship Name Activity Relationship Type Lookup Refers To UnifiedVideoCall
ChannelAddress	Type string Properties Filter, Nillable Description The email address of the participant. The email address is captured at the time of the communication; it doesn't change if the contact's email address is updated later.
ListenRatio	Type double Properties Filter, Nillable Description Ratio of time the participant was listening versus talking in the video call.
ParticipantType	Type picklist

Field	Details
	Properties Filter, Nillable, Restricted picklist Description The participant’s role in the activity. Possible values are: AssignedTo Attendee BCC CC From OptionalAttendee Organizer To
PersonId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the person participating in the activity. This field is a polymorphic relationship field. Relationship Name Person Relationship Type Lookup Refers To Contact, Lead, User
TalkRatio	Type double Properties Filter, Nillable Description Ratio of time the participant was talking versus listening in the video call.

UnifiedVoiceCall

Represents a voice call that is captured or synced from a VoiceCall or Task record. This object is available for reports and dashboards in the Winter '24 release and later.

Supported Calls

```
describeSObjects(), query(), retrieve()
```

 **Note:** This object is available only for reporting. It isn't supported for SOQL queries and APIs.

Special Access Rules

We're retiring Einstein Activity Capture Activity 360 Reporting. Starting in Summer '25, this object isn't available with Einstein Activity Capture unless Activity 360 Reporting was enabled in your org in Spring '25 or earlier. See Knowledge Article: [Einstein Activity Capture Activity 360 Reporting, Activity Metrics, Activities Dashboard Upcoming Retirement](#)

Fields

Field	Details
ActivityDateTime	Type dateTime Properties Filter, Sort Description The date and time of the activity in the Coordinated Universal Time (UTC) time zone.
ActivitySubType	Type picklist Properties Filter, Nillable, Restricted picklist Description Provides standard subtypes to facilitate creating and searching for specific activity subtypes. Possible values are: • Captured • LegacyCall • Streamed • VoiceCall
ActivityType	Type picklist Properties Filter, Nillable, Restricted picklist Description The type of activity. Possible value is UnifiedVoiceCall.

Field	Details
CallDurationInSeconds	Type int Properties Filter, Nillable Description The duration of the voice call in seconds.
DetailId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the object that contains detailed activity-specific information. The object depends on the activity type. For example, the detail for a Task activity is a Task object. The detail for an Event activity is an Event object. This field is a relationship field. Relationship Name Detail Relationship Type Lookup Refers To VoiceCall
InternalEventKey	Type string Properties Filter, Group, Nillable, Sort Description Reserved for internal use.
IsInsightAvailable	Type boolean Properties Defaulted on create, Filter Description Indicates whether the activity has an insight associated with it (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
Snippet	Type string

Field	Details
	Properties Nillable Description An abbreviation of the voice call content. This field has a maximum length of 255 characters.
Subject	Type string Properties None Description Contains the subject of the voice call.

UnifiedVoiceCallParticipant

Represents a participant in a voice call. This object is available for reports and dashboards in the Winter '24 release and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

 **Note:** This object is available only for reporting. It isn't supported for SOQL queries and APIs.

Special Access Rules

We're retiring Einstein Activity Capture Activity 360 Reporting. Starting in Summer '25, this object isn't available with Einstein Activity Capture unless Activity 360 Reporting was enabled in your org in Spring '25 or earlier. See Knowledge Article: [Einstein Activity Capture Activity 360 Reporting, Activity Metrics, Activities Dashboard Upcoming Retirement](#)

Fields

Field	Details
ActivityId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the voice call the person is participating in. This field is a relationship field. Relationship Name Activity

Field	Details
	Relationship Type Lookup Refers To UnifiedVoiceCall
ChannelAddress	Type string Properties Filter, Nillable Description The phone number of the participant. The phone number is captured at the time of the communication; it doesn't change if the contact's phone number is updated later.
ListenRatio	Type double Properties Filter, Nillable Description Ratio of time the participant was listening versus talking in the voice call.
ParticipantType	Type picklist Properties Filter, Nillable, Restricted picklist Description The participant's role in the activity. Possible values are: - AssignedTo - Attendee - BCC - CC - From - OptionalAttendee - Organizer - To
PersonId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description ID of the person participating in the voice call. This field is a polymorphic relationship field. Relationship Name Person Relationship Type Lookup Refers To Contact, Lead, User
TalkRatio	Type double Properties Filter, Nillable Description Ratio of time the participant was talking versus listening in the voice call.

UnitOfMeasure

Defines the units and systems of units used to express and account for quantities. This object is available in API version 61.0 and later. Examples of units of measure include Litre (for volume), Kilogram (for weight), and single units (such as Can, sachet, and packet).

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ConversionFactor	Type double Properties Create, Filter, Nillable, Sort, Update Description The factor or rate that's used to convert this unit of measurement to the base unit. For example, for the Weight unit of measure class, the default unit of measure is pounds (lbs). Then, all units of measure records with the Weight unit of measure class are converted to

Field	Details
	equate 1 unit to 1 pound. If the unit of measure is kilogram, the conversion factor is 2.2 as 1 pound consists of 2.2 kilograms.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The description of this unit of measure.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the unit of measure.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user or group that owns the job., This field is a polymorphic relationship field.

Field	Details
	Relationship Name Owner Refers To Group, User
Type	Type picklist Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The type of the unit of measure. For example, weight, distance, period.
Sequence	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The sequence number assigned to the unit of measure.
Status	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the status of the unit of measure. Possible values are: - Active - Draft - Inactive
UnitCode	Type string Properties Create, Filter, Group, Sort, Update Description Code for the unit of measure.
UnitOfMeasureClassId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The class associated with the unit of measurement. This field is a relationship field.
	Relationship Name UnitOfMeasureClass
	Refers To UnitOfMeasureClass

UriEventLog

URI events contain details about user interaction with the web browser UI. This object is available in API version 61.0 and later.



Note: This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
ClientId	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.
CpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.

Field	Details
DatabaseBlocks	Type double Properties Filter, Nillable, Sort Description Indicates how much activity is occurring in the database.
DatabaseCpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds to complete the request. Indicates the amount of activity taking place in the database layer during the request.
DatabaseTotalTime	Type double Properties Filter, Nillable, Sort Description The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and <code>DatabaseCpuTime</code>. Compare this field to <code>CpuTime</code> to determine whether performance issues are occurring in the database layer or in your own code.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: <code>GeJCSym5eyvtEK2I.</code>
ReferrerUri	Type string Properties Filter, Group, Nillable, Sort Description The referring URI of the page that's receiving the request.

Field	Details
RequestIdIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestIdIdentifier</code>. For example: 3nWgxWbDKWWDiK0FKfF5DV.
RequestStatus	Type String Description The status of the request for a page view or user interface action. For example: • S—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned. • F—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only. • U—Undefined • A—Authorization Error • R—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page. • N—Not Found. 404 error. This field can have a blank value.
RunTime	Type double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: d7DEq/ANa7nNZZVD.

Field	Details
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: /home/home.jsp.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.
UserType	Type string Properties Filter, Group, Nillable, Sort Description The category of user license. Possible values are: • CsnOnly—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users. • CspLitePortal—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site. • CustomerSuccess—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. • Guest—Users whose access is limited so that your customers can view and interact with your site without logging in. • PowerCustomerSuccess—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a

Field	Details
	customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy.
	• <code>PowerPartner</code>—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site. • <code>SelfService</code>—Users whose access is limited because they're organization customers and access the application through a self-service portal. • <code>Standard</code>—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.

UsageImpactFactor

Represents a collection of fields to set up the Usage Impact Factors used across jurisdictions and programs. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available only with the EAndU Cloud Usage Impact Access permission set.

Fields

Field	Details
<code>IsActive</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the Usage Impact Factor is active. The default value is <code>false</code>.
<code>Name</code>	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the Usage Impact Factor.

Field	Details
ShortForm	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The acronym of the Usage Impact Factor.
Type	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the type of Usage Impact Factor Possible values are: - AdjustedGrossAnnual—Adjusted Gross Annual - AdjustedGrossAnnualMMBTU—Adjusted Gross Annual MMBTU - AdjustedGrossAnnualkW—Adjusted Gross Annual kW - AdjustedGrossAnnualkWSummer—Adjusted Gross Annual kW Summer - AdjustedGrossAnnualkWWinter—Adjusted Gross Annual kW Winter - AdjustedGrossAnnualkWh—Adjusted Gross Annual kWh - GrossAnnualMMBTU—Gross Annual MMBTU - GrossAnnualkW—Gross Annual kW - GrossAnnualkWh—Gross Annual kWh - NetAnnual—Net Annual - NetLifetime—Net Lifetime - NetToGross—Net To Gross - NetToGrossFR—Net To Gross FR - UsefulLife—Useful Life

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

UsageImpactFactorChangeEvent

Change events are available for the object.

UsageImpactFactorFeed

Feed tracking is available for the object.

UsageImpactFactorHistory

History is available for tracked fields of the object.

UsageImpactFactorOwnerSharingRule

Sharing rules are available for the object.

UsageImpactFactorShare

Sharing is available for the object.

UsageImpactGroup

Represents a collection of fields to set up the Usage Impact Groups used across jurisdictions and programs. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available only with the EAndU Cloud Usage Impact Access permission set.

Fields

Field	Details
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the Usage Impact Group.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the Usage Impact Group is active. The default value is <code>false</code> .
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update

Field	Details
	Description The name of the Usage Impact Group.
ShortForm	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The acronym of the Usage Impact Group.
Type	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the type of Usage Impact Group. Possible values are: • ForwardMarkets—Forward Markets • Planning • Production

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[UsageImpactGroupChangeEvent](#)

Change events are available for the object.

[UsageImpactGroupFeed](#)

Feed tracking is available for the object.

[UsageImpactGroupHistory](#)

History is available for tracked fields of the object.

[UsageImpactGroupOwnerSharingRule](#)

Sharing rules are available for the object.

[UsageImpactGroupShare](#)

Sharing is available for the object.

UsageImpactGroupFactor

Represents a junction between an Usage Impact Group version and Usage Impact Factor. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available only with EAndU Cloud Usage Impact Access permission set.

Fields

Field	Details
FactorValue	Type double Properties Create, Filter, Nillable, Sort, Update Description Defines the value of the Usage Impact Group Factor.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the Usage Impact Group Factor is active. The default value is <code>false</code> .
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the Usage Impact Group Factor.
UnitOfMeasureId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The UnitOfMeasure object associated with the Usage Impact Group Factor. This field is a relationship field.

Field	Details
	Relationship Name UnitOfMeasure
	Relationship Type Lookup
	Refers To UnitOfMeasure
UsageImpactFactorId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The Usage Impact Factor object associated with the Usage Impact Group Factor. This field is a relationship field.
	Relationship Name UsagelImpactFactor
	Relationship Type Lookup
	Refers To UsagelImpactFactor
UsageImpactGroupVersionId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The Usage Impact Group Version object associated with the Usage Impact Group Factor. This field is a relationship field.
	Relationship Name UsagelImpactGroupVersion
	Relationship Type Lookup
	Refers To UsagelImpactGroupVersion

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

UsageImpactGroupFactorChangeEvent

Change events are available for the object.

UsageImpactGroupFactorFeed

Feed tracking is available for the object.

UsageImpactGroupFactorHistory

History is available for tracked fields of the object.

UsageImpactGroupFactorOwnerSharingRule

Sharing rules are available for the object.

UsageImpactGroupFactorShare

Sharing is available for the object.

UsageImpactGroupPgmMeasure

Represents a junction between the program, product, and Usage Impact Group version. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available only with EAndU Cloud Usage Impact Access permission set.

Fields

Field	Details
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the Usage Impact Group Program Measure.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the Usage Impact Group Program Measure.

Field	Details
Product2Id	Type reference Properties Create, Filter, Group, Sort, Update Description The Product2 object associated with the Usage Impact Group Program Measure. This field is a relationship field. Relationship Name Product2 Relationship Type Lookup Refers To Product2
ProgramId	Type reference Properties Create, Filter, Group, Sort, Update Description The Program object associated with the Usage Impact Group Program Measure. This field is a relationship field. Relationship Name Program Relationship Type Lookup Refers To Program
UsageImpactGroupVersionId	Type reference Properties Create, Filter, Group, Sort, Update Description The Usage Impact Group Version associated with the Energy Saving Group Association. This field is a relationship field. Relationship Name UsagImpactGroupVersion Relationship Type Lookup

Field	Details
	Refers To UsagelmpactGroupVersion

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[UsagelmpactGroupPgmMeasureChangeEvent](#)

Change events are available for the object.

[UsagelmpactGroupPgmMeasureFeed](#)

Feed tracking is available for the object.

[UsagelmpactGroupPgmMeasureHistory](#)

History is available for tracked fields of the object.

[UsagelmpactGroupPgmMeasureOwnerSharingRule](#)

Sharing rules are available for the object.

[UsagelmpactGroupPgmMeasureShare](#)

Sharing is available for the object.

UsagelmpactGroupVersion

Represents a collection of fields to set up the versions of Usage Impact Groups. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available only with EAndU Cloud Usage Impact Access permission set.

Fields

Field	Details
ApprovedMeasureExtId	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The approved Measure Category ID assigned by a regulator.

Field	Details
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the Usage Impact Group Version.
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date when the validity of Usage Impact Group Version ends.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the Usage Impact Group Version is active. The default value is <code>false</code>.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the Usage Impact Group Version.
StartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date when the validity of Usage Impact Group Version begins.
TechResourceManualCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The code and version of the Technical Reference Manual which is the source for the values associated with this Usage Impact Group Version. This is necessary for regulatory reporting.
UsageImpactGroupId	Type reference Properties Create, Filter, Group, Sort, Update Description The Usage Impact Group object associated with the Usage Impact Group Version. This field is a relationship field. Relationship Name UsageImpactGroup Relationship Type Lookup Refers To UsageImpactGroup
Version	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The version number of the Usage Impact Group Version.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[UsageImpactGroupVersionChangeEvent](#)

Change events are available for the object.

[UsageImpactGroupVersionFeed](#)

Feed tracking is available for the object.

[UsageImpactGroupVersionHistory](#)

History is available for tracked fields of the object.

[UsageImpactGroupVersionOwnerSharingRule](#)

Sharing rules are available for the object.

[UsageImpactGroupVersionShare](#)

Sharing is available for the object.

User

Represents a user in your organization.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

- To create or update a User record, you must have the Manage Internal Users permission. If the user is a Customer Portal user, you must have the Manage Customer Users permission. If the user is a partner portal user, you must have the Manage External Users permission. But the `describeSObjects` call always returns `createable` as `true`.
- If digital experiences is enabled, to create or update external users for Customer Portal, partner portal, or Experience Cloud sites, you must also have the Manage External Users permission.
- Information in hidden fields in a user's profile isn't searchable by external users (with a portal profile) in an Experience Cloud site. For example, if a user in a site has a hidden email address and an external user searches for it, the user record isn't returned in the search results. Hidden field values also aren't returned when external users perform searches on nonhidden fields. So if an external user searches for a user's name (can't be hidden), any hidden field values associated with the user record such as a hidden email address aren't returned in the search results.

But internal users belonging to the same Experience Cloud site can search for and view hidden field values in search results.

- When requested by portal users, queries that look up to the User object, such as `owner.name` or `owner.email` sometimes don't return values when the portal user making the request doesn't have Read access to the User record being queried.

The behavior depends on the number of domains associated with the lookup field. If the object can look up to more than one domain, `owner.name` returns a value, but other detail fields don't. For example, Case owner can look up to the User or Queue objects. In this case, portal users can see only the value of `owner.name`. Other User detail fields, such as `owner.email` or `owner.phone` don't return a value.

If the object can look up to only a single domain, such as Account owner, then no detail fields return values, including `owner.name`.
- To change ownership of a record by updating its `OwnerId` field, you must have both the Transfer Record permission and Read access to the User record of the new record owner.
- To view the `NumberOfFailedLogins` field, you must have the Manage User permission.

Fields

Field	Details
AboutMe	Type textarea Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description Information about the user, such as areas of interest or skills. This field is available even if Chatter is disabled.
AccountId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the Account associated with a Customer Portal user. This field is null for Salesforce users. This is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
Address (beta)	Type address Properties Filter, Nillable Description The compound form of the address. Read-only. See Address Compound Fields for details on compound address fields.
Alias	Type string Properties Create, Filter, Group, Sort, Update Description Required. The user's alias. For example, jsmith.
BadgeText	Type string Properties Filter, Group, Nillable, Sort Description The Experience Cloud site role, displayed on the user profile page just below the user name.

Field	Details
BannerPhotoUrl	Type url Properties Filter, Nillable, Sort Description The URL for the user's banner photo. This field is available in API version 36.0 and later.
CallCenterId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description If Salesforce CRM Call Center is enabled, represents the call center that this user is assigned to.
City	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The city associated with the user. Up to 40 characters allowed.
CommunityNickname	Type string Properties Create, Filter, Group, Sort, Update Description Unique name used to identify this user in the Experience Cloud site.
CompanyName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name of the user's company.
ContactId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description ID of the Contact associated with this account. The contact must have a value in the <code>AccountId</code> field or an error occurs. This is a relationship field. Relationship Name Contact Relationship Type Lookup Refers To Contact
Country	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The country associated with the user. Up to 80 characters allowed.
CountryCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO country code associated with the user.
CurrentStatus	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Text that describes what the user is working on.  Note: If you update this field, the API automatically adds a post of type <code>UserStatus</code> on the user's profile in Chatter. This field is deprecated in API version 25.0. To achieve similar behavior, post to the user directly by creating a <code>FeedItem</code> with the user's <code>ParentId</code>.
DefaultCurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description The user's default currency setting for new records. For example, if a user in France sets <code>DefaultCurrencyIsoCode</code> to euros, then that's their default currency. Only applicable for organizations that use multiple currencies.
<code>DefaultDivision</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description This record's default division. Only applicable if divisions are enabled.
<code>DefaultGroupNotificationFrequency</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Required. The default frequency for sending the user's Chatter group email notifications when the user joins groups. The valid values are: • <code>P</code>—Email on every post • <code>D</code>—Daily digests • <code>W</code>—Weekly digests • <code>N</code>—Never The default value is <code>N</code>. For Professional, Enterprise, Unlimited, and Developer Edition organizations that existed before API version 22.0, the default value remains <code>D</code>. This field is available in API version 21.0 and later.
<code>DelegatedApproverId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Id of the user who is a delegated approver for this user.
<code>Department</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The company department associated with the user.

Field	Details
DigestFrequency	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Required. The send frequency of the user's Chatter personal email digest. The valid values are: • D = Daily • W = Weekly • N = Never The default value is D.
Division	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The division associated with this user, similar to Department, and unrelated to DefaultDivision.
Email	Type email Properties Create, Filter, Group, idLookup, Sort, Update Description Required. The user's email address.
EmailEncodingKey	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. The email encoding for the user, such as ISO-8859-1 or UTF-8.
EmailPreferencesAutoBcc	Type boolean Properties Create, Filter, Update Description Determines whether the user receives copies of sent emails. This option applies only if compliance BCC emails aren't enabled.

Field	Details
EmployeeNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The user's employee number.
EndDay	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The time of day that the user generally stops working. Used to define the times that display in the user's calendar. This field is available in API version 63.0 and later.
Extension	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description The user's phone extension number.
Fax	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description The user's fax number.
FederationIdentifier	Type string Properties Create, Filter, idLookup, Nillable, Sort, Update Description Indicates the value that must be listed in the <code>Subject</code> element of a Security Assertion Markup Language (SAML) <i>IDP certificate</i> to authenticate the user for a client application using single sign-on. This value must be specified if the <code>SAML User ID Type</code> is Assertion contains Federation ID from the User record. Otherwise, this field can't be edited.
FirstName	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The user's first name.
ForecastEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the user is enabled for forecasts (<code>true</code>) or not (<code>false</code>). Forecast user has access to the forecasts page.
FullPhotoUrl	Type url Properties Filter, Nillable, Sort Description The URL for the user's profile photo. This field is available even if Chatter is disabled. The URL is updated every time a photo is uploaded and reflects the most recent photo. If a newer photo is uploaded, the URL returned for an older photo isn't guaranteed to return a photo. Query this field for the URL of the most recent photo. This field is available in API version 20.0 and later.
GeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The level of accuracy of a location's geographical coordinates compared with its physical address. A geocoding service typically provides this value based on the address's latitude and longitude coordinates.
HasUserVerifiedEmail	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the user's email is verified (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>. This field is available in API version 63.0 and later.

Field	Details
HasUserVerifiedPhone	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the user's phone number is verified (<code>true</code>) or not (<code>false</code>). The default value is false. This field is available in API version 63.0 and later.
IndividualId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the data privacy record associated with this user. This field is available if Data Protection and Privacy is enabled. This is a relationship field. Relationship Name Individual Relationship Type Lookup Refers To Individual
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the user has access to log in (<code>true</code>) or not (<code>false</code>). You can modify a User's active status from the user interface or via the API.
IsPartner	Type boolean Properties Defaulted on create, Filter Description Indicates whether the user is a partner who has access to the partner portal (<code>true</code>) or not (<code>false</code>). This field isn't available for release 9.0 and later. Instead, use <code>UserType</code> with the value <code>Partner</code> or <code>Power Partner</code>.
IsPortalEnabled	Type boolean

Field	Details
	Properties Defaulted on create, Filter, Group, Sort, Update Description Indicates whether an active, external, user has access to Experience Cloud sites or portals (<code>true</code>) or not (<code>false</code>). This field is only available if one of these conditions is true: - Digital experiences is enabled and you have community or portal user licenses - Portals are enabled  Note: Users with External Identity licenses can access Experience Cloud sites even if the flag is false.
IsPortalSelfRegistered	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether the user is a Customer Portal user who self-registered for your organization's Customer Portal (<code>true</code>) or not (<code>false</code>). This field isn't available for release 9.0 and earlier.
IsPrmSuperUser	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Available for partner portal users only. Indicates whether the user has super user access in the partner portal (<code>true</code>) or not (<code>false</code>). This field is available in API version 24.0 and later.  Note: This field isn't automatically enabled. Contact Salesforce to enable this field.
IsProfilePhotoActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a user has a profile photo (<code>true</code>) or not (<code>false</code>). This field is available in API version 36.0 and later.
JigsawImportLimitOverride	Type int

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The Data.com user's monthly addition limit. The value must be between zero and the organization's monthly addition limit. Label is Data.com Monthly Addition Limit. This field is available in API version 27.0 and later.
LanguageLocaleKey	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. The user's language, such as French or Chinese (Traditional). Label is Language.  Note: In API version 47.0 and later, when using the DescribeSObjectResult API to return PicklistEntry values from this picklist, the <code>active</code> value indicates whether the language is in the user's Displayed Languages (<code>true</code>) or the user's Available Languages (<code>false</code>). All other languages aren't in the returned <code>active</code> value array. In API version 46.0 and earlier, the PicklistEntry <code>active</code> values indicate whether the language is in either the user's Displayed Languages or Available Languages lists (<code>true</code>) or not in either list (<code>false</code>).
LastLoginDate	Type dateTime Properties Filter, Sort, Nillable Description The date and time when the user last successfully logged in. This value is updated if 60 seconds elapses since the user's last login.
LastName	Type string Properties Create, Filter, Group, Sort, Update Description Required. The user's last name.
LastReferencedDate	Type datetime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) but not viewed.
Latitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>Longitude</code> to specify the geolocation of an address. Acceptable values are numbers between –90 and 90 up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations .
LocaleSidKey	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. This field is a restricted picklist field. The value of the field affects formatting and parsing of values, especially numeric values, in the user interface. It doesn't affect the API. The field values are named according to the language, and the country if necessary, using two-letter ISO codes. The set of names is based on the ISO standard. You can also manually set a user's locale in the user interface, and then use that value for inserting or updating other users via the API.
Longitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with <code>Latitude</code> to specify the geolocation of an address. Acceptable values are numbers between –180 and 180 up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations .

Field	Details
Manager	Type picklist Properties Create, Filter, Restricted picklist, Update Description User lookup field used to select the user's manager. This field establishes a hierarchical relationship, preventing you from selecting a user that directly or indirectly reports to themselves.
ManagerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The Id of the user who manages this user. This is a relationship field. Relationship Name Manager Relationship Type Lookup Refers To User
MediumBannerPhotoUrl	Type url Properties Filter, Nillable, Sort Description The URL for the medium-sized user profile banner photo.
MiddleName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The user's middle name. Maximum size is 40 characters. To enable this field, contact Salesforce Customer Support.
MobilePhone	Type phone

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The user's mobile device number.
Name	Type string Properties Filter, Group, Sort Description Concatenation of <code>FirstName</code> and <code>LastName</code> . Limited to 203 characters, including whitespaces.
NumberOfFailedLogins	Type int Properties Filter, Group, Nillable, Sort Description The number of failed login attempts for the user's account. When the maximum number of failed login attempts is reached, the counter resets and the user's account is locked. If there's a successful login before the maximum number of failed login attempts is reached, the counter resets and the user's account remains unlocked.
OfflineTrialExpirationDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the user's Connect Offline trial expires.
PasswordExpirationDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the user's password expires. This field is available in API version 63.0 and later.
Phone	Type phone Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The user's phone number.
PortalRole	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The role of the user in the Customer Portal (either Executive, Manager, User, or PersonAccount). In API version 15.0 and earlier, if you set this field to null, the system automatically included a portal role. In API version 16.0 and above, when you set this field to null, a portal role is not automatically created. When this field is null and a <code>ContactId</code> is provided, the user is assigned to the User role. The Update property is available in API version 43.0 and later. The field is available if Customer Portal is enabled OR digital experiences is enabled and Experience Cloud sites have available partner portal, Customer Portal, or High-Volume Portal User licenses.
PostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The user's postal or ZIP code. Label is Zip/Postal Code .
ProfileId	Type reference Properties Create, Filter, Group, Sort, Update Description Required. ID of the user's Profile. Use this value to cache metadata based on profile. In earlier releases, this was <code>RoleId</code> . If you change the user's profile, the user's license also changes, because every profile belongs to exactly one user license type. This is a relationship field. Relationship Name Profile Relationship Type Lookup Refers To Profile

Field	Details
ReceivesAdminInfoEmails	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the user receives email for administrators from Salesforce (<code>true</code>) or not (<code>false</code>).
ReceivesInfoEmails	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the user receives informational email from Salesforce (<code>true</code>) or not (<code>false</code>).
SenderEmail	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description The email address used as the From address when the user sends emails. This address is the same value shown in Setup on the My Email Settings page.
SenderName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The name used as the email sender when the user sends emails. This name is the same value shown in Setup on the My Email Settings page.
Signature	Type textarea Properties Create, Filter, Nillable, Sort, Update Description The signature text added to emails. This text is the same value shown in Setup on the My Email Settings page.
SmallBannerPhotoUrl	Type url

Field	Details
	Properties Filter, Nillable, Sort Description The URL for the small user profile banner photo.
SmallPhotoUrl	Type url Properties Filter, Nillable, Sort Description The URL for a thumbnail of the user's profile photo. This field is available even if Chatter is disabled. The URL is updated every time a photo is uploaded and reflects the most recent photo. If a newer photo is uploaded, the URL returned for an older photo isn't guaranteed to return a photo. Query this field for the URL of the most recent photo. This field is available in API version 20.0 and later.
StartDay	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The time of day that the user generally starts working. Used to define the times that display in the user's calendar. This field is available in API version 63.0 and later.
State	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The state associated with the User. Up to 80 characters allowed.
StateCode	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The ISO state code associated with the user.
Street	Type textarea

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The street address associated with the User.
SuAccessExpirationDate	Type date Properties Filter, Group, Nillable, Sort Description The expiration date for allowing Salesforce Customer Support to log in as this user with Login As functionality. After this date, the user must grant login access to Salesforce Customer Support again. This field is available in API version 63.0 or later.
Suffix	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The user's name suffix. Maximum size is 40 characters. To enable this field, contact Salesforce Customer Support.
TimeZoneSidKey	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. This field is a restricted picklist field. A User time zone affects the offset used when displaying or entering times in the user interface. But the API doesn't use a User time zone when querying or setting values. Values for this field are named using region and key city, according to ISO standards. You can also manually set one User time zone in the user interface, and then use that value for creating or updating other User records via the API.
Title	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The user's business title, such as Vice President.

Field	Details
Username	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Contains the name that a user enters to log in to the API or the user interface. The value for this field must be in the form of an email address, using all lowercase characters. It must also be unique across all organizations. If you try to create or update a User with a duplicate value for this field, the operation is rejected. Each inserted User also counts as a license. Every organization has a maximum number of licenses. If you attempt to exceed the maximum number of licenses by inserting User records, the create request is rejected.
UserPermissionsCallCenterAutoLogin	Type boolean Properties Create, Filter, Update Description Required if Salesforce CRM Call Center is enabled. Indicates whether the user is enabled to use the auto login feature of the call center (<code>true</code>) or not (<code>false</code>).
UserPermissionsChatterAnswersUser	Type boolean Properties Create, Filter, Update Description Indicates whether the portal user is enabled to use the Chatter Answers feature (<code>true</code>) or not (<code>false</code>). This field defaults to <code>false</code> when a Customer Portal user is created from the API.
UserPermissionsInteractionUser	Type boolean Properties Create, Filter, Update Description Indicates whether the user can run flows or not. Label is Flow User.
UserPermissionsJigsawProspectingUser	Type boolean Properties Create, Filter, Update

Field	Details
	Description Indicates whether the user is allocated one Data.com user license (<code>true</code>) or not (<code>false</code>). The Data.com user lets the user add Data.com contact and lead records to Salesforce in supported editions. Label is Data.com User.
UserPermissionsKnowledgeUser	Type boolean Properties Create, Filter, Update Description Indicates whether the user is enabled to use Salesforce Knowledge (<code>true</code>) or not (<code>false</code>). Label is Knowledge User.
UserPermissionsLiveAgentUser	Type boolean Properties Create, Filter, Update Description Indicates whether the user is enabled to use Chat (<code>true</code>) or not (<code>false</code>). Label is Live Agent User.
UserPermissionsMarketingUser	Type boolean Properties Create, Filter, Update Description Required. Indicates whether the user is enabled to manage campaigns in the user interface (<code>true</code>) or not (<code>false</code>). Label is Marketing User.
UserPermissionsOfflineUser	Type boolean Properties Create, Filter, Update Description Required. Indicates whether the user is enabled to use Offline Edition (<code>true</code>) or not (<code>false</code>). Label is Offline User.
UserPermissionsSFContentUser	Type boolean Properties Create, Filter, Update

Field	Details
	Description Indicates whether the user is allocated one Salesforce CRM Content User License (<code>true</code>) or not (<code>false</code>). Label is Salesforce CRM Content User. The Salesforce CRM Content User license grants the user access to the Salesforce CRM Content application.
UserPermissionsSiteforceContributorUser	Type boolean Properties Create, Filter, Update Description Indicates whether the user is allocated one Site.com Contributor feature license (<code>true</code>) or not (<code>false</code>). Label is Site.com Contributor User. The Site.com Contributor feature license grants the user access to the Site.com application. Users with a Contributor license can use Site.com Studio to edit site content only.
UserPermissionsSiteforcePublisherUser	Type boolean Properties Create, Filter, Update Description Indicates whether the user is allocated one Site.com Publisher feature license (<code>true</code>) or not (<code>false</code>). Label is Site.com Publisher User. The Site.com Publisher feature license grants the user access to the Site.com application. Users with a Publisher license can build and style websites, control the layout and functionality of pages and page elements, and add and edit content.
UserPermissionsSupportUser	Type boolean Properties Create, Filter, Update Description When <code>true</code>, the user can use the Salesforce console.
UserPermissionsWirelessUser	Type boolean Properties Create, Filter, Update Description Required if the Wireless permission is enabled. Indicates whether the user is enabled to use Wireless Edition (<code>true</code>) or not (<code>false</code>). Label is Wireless User.

Field	Details
	 Note: As of November 2005, Salesforce Wireless Edition is no longer available for purchase. You can continue to use Wireless Edition through the end of your existing contract term if you are: - A Professional Edition customer and purchased Wireless Edition before November 7, 2005. - An Enterprise Edition customer who signed or renewed their Salesforce contract before November 7, 2005.
UserPermissionsWorkDotComUserFeature	Type boolean Properties Create, Filter, Update Description Indicates whether the WDC feature is enabled for the user (<code>true</code>) or not (<code>false</code>).
UserPreferencesActivityRemindersPopUp	Type boolean Properties Create, Filter, Update Description When <code>true</code>, a reminder window automatically opens when an activity reminder is due. Corresponds to the <code>Trigger alert when reminder comes due</code> checkbox at the Reminders page in the personal settings in the user interface.
UserPreferencesAllowConversationReminders	Type boolean Properties Create, Filter, Update Description When <code>true</code>, voice and call reminders are displayed as notification cards in Lightning Experience. Corresponds to the <code>Show conversation reminders in Lightning Experience</code> checkbox in the Activity Reminders page in the personal settings in the user interface. This field is available in API version 55.0 and later.
UserPreferencesApexPagesDeveloperMode	Type boolean Properties Create, Filter, Update Description When <code>true</code>, indicates that the user has enabled developer mode for editing Visualforce pages and controllers.

Field	Details
UserPreferencesAutoForwardCall	Type boolean Properties Create, Filter, Update Description When <code>true</code>, the user receives Dialer calls simultaneously in their browser and on their forwarding number.
UserPreferencesContentEmailAsAndWhen	Type boolean Properties Create, Filter, Update Description When <code>false</code>, a user with Salesforce CRM Content subscriptions receives a once-daily email summary if activity occurs on the subscribed content, libraries, tags, or authors. To receive email, the <code>UserPreferencesContentNoEmail</code> field must also be <code>false</code>. The default value is <code>false</code>.  Note: This field is only visible when Salesforce CRM Content is enabled.
UserPreferencesContentNoEmail	Type boolean Properties Create, Filter, Update Description When <code>false</code>, a user with Salesforce CRM Content subscriptions receives email notifications if activity occurs on the subscribed content, libraries, tags, or authors. To receive real-time email alerts, set this field to <code>false</code> and set the <code>UserPreferencesContentEmailAsAndWhen</code> field to <code>true</code>. The default value is <code>false</code>.  Note: This field is only visible when Salesforce CRM Content is enabled.
UserPreferencesEnableAutoSubForFeeds	Type boolean Properties Create, Filter, Update Description When <code>true</code>, the user automatically subscribes to feeds for any objects that the user creates. This field is available in API version 25.0 and later.

Field	Details
<code>UserPreferencesDisableAllFeedsEmail</code>	Type boolean Properties Create, Filter, Update Description When <code>false</code>, the user automatically receives email for all updates to Chatter feeds, based on the types of feed emails and digests the user has enabled. This field is available in API version 24.0 and later.
<code>UserPreferencesDisableAutoSubForFeeds</code>	Type boolean Properties Create, Filter, Update Description When <code>false</code>, the user automatically subscribes to feeds for any objects that the user creates. This field is deprecated in API version 25.0 and later. Starting with API version 25.0, use <code>UserPreferencesEnableAutoSubForFeeds</code> to enable or disable auto-follow for objects a user creates.
<code>UserPreferencesDisableBookmarkEmail</code>	Type boolean Properties Create, Filter, Update Description When <code>false</code>, the user automatically receives email every time someone comments on a Chatter feed item after the user has bookmarked it. This field is available in API version 24.0 and later.
<code>UserPreferencesDisableChangeCommentEmail</code>	Type boolean Properties Create, Filter, Update Description When <code>false</code>, the user automatically receives email every time someone comments on a change the user has made, such as an update to their profile. This field is available in API version 24.0 and later.
<code>UserPreferencesDisableEmbedmentEmail</code>	Type boolean Properties Create, Filter, Update

Field	Details
	Description When <code>false</code>, the member automatically receives email every time someone endorses them for a topic.
<code>UserPreferencesDisableFileShareNotificationsEmail</code>	Type boolean Properties Create, Filter, Update Description When <code>false</code>, email notifications are sent from the person who shared the file to the users that the file is shared with. This field is available in API version 25.0 and later.
<code>UserPreferencesDisableFollowersEmail</code>	Type boolean Properties Create, Filter, Update Description When <code>false</code>, the user automatically receives email every time someone starts following the user in Chatter. This field is available in API version 24.0 and later.
<code>UserPreferencesDisableLaterCommentEmail</code>	Type boolean Properties Create, Filter, Update Description When <code>false</code>, the user automatically receives email every time someone comments on a feed item after the user has commented on the feed item. This field is available in API version 24.0 and later.
<code>UserPreferencesDisableLikeEmail</code>	Type boolean Properties Create, Filter, Update Description When <code>false</code>, the user automatically receives email every time someone likes their post or comment. This field is available in API version 24.0 and later.
<code>UserPreferencesDisableMentionsPostEmail</code>	Type boolean Properties Create, Filter, Update

Field	Details
	Description When <code>false</code>, the user automatically receives email every time they're mentioned in posts. This field is available in API version 24.0 and later.
<code>UserPreferencesDisableProfilePostEmail</code>	Type boolean Properties Create, Filter, Update Description When <code>false</code>, the user automatically receives email every time someone posts to the user's profile. This field is available in API version 24.0 and later.
<code>UserPreferencesDisableSharePostEmail</code>	Type boolean Properties Create, Filter, Update Description When <code>false</code>, the user automatically receives email every time their post is shared. This field is available in API version 24.0 and later.
<code>UserPreferencesDisableFeedbackEmail</code>	Type boolean Properties Create, Filter, Update Description When <code>false</code>, the user automatically receives emails related to WDC feedback. The user receives these emails when someone requests or offers feedback, shares feedback with the user, or reminds the user to answer a feedback request. This field isn't visible as of API version 54.0.
<code>UserPreferencesDisCommentAfterLikeEmail</code>	Type boolean Properties Create, Filter, Update Description When <code>false</code>, the user automatically receives email every time someone comments on a post that the user liked. This field is available in API version 24.0 and later.
<code>UserPreferencesDisMentionsCommentEmail</code>	Type boolean Properties Create, Filter, Update

Field	Details
	Description When <code>false</code>, the user automatically receives email every time the user is mentioned in comments. This field is available in API version 24.0 and later.
<code>UserPreferencesDisableMessageEmail</code>	Type boolean Properties Create, Filter, Update Description When <code>false</code>, the user automatically receives email for Chatter messages sent to the user. This field is available in API version 24.0 and later.
<code>UserPreferencesDisableRewardEmail</code>	Type boolean Properties Create, Filter, Update Description When <code>false</code>, the user automatically receives emails related to WDC rewards. The user receives these emails when someone gives a reward to the user.
<code>UserPreferencesDisableWorkEmail</code>	Type boolean Properties Create, Filter, Update Description When <code>false</code>, the user receives emails related to WDC feedback, goals, and coaching. The user must also sign up for individual emails listed on the WDC email settings page. When <code>true</code>, the user doesn't receive any emails related to WDC feedback, goals, or coaching even if they're signed up for individual emails.
<code>UserPreferencesDisProfPostCommentEmail</code>	Type boolean Properties Create, Filter, Update Description When <code>false</code>, the user automatically receives email every time someone comments on posts on the user's profile. This field is available in API version 24.0 and later.
<code>UserPreferencesDisableVoiceCallRecording</code>	Type boolean Properties Create, Filter, Update

Field	Details
	Description When <code>true</code> , voice call recording is enabled for the user.
<code>UserPreferencesTable.VoiceLocalPresence</code>	Type boolean Properties Create, Filter, Update Description When <code>true</code> , local numbers are shown when the user calls customers with Sales Dialer.
<code>UserPreferencesEventRemindersCheckboxDefault</code>	Type boolean Properties Create, Filter, Update Description When <code>true</code> , a reminder popup is automatically set on the user's events. Corresponds to the <code>By default, set reminder on Events to...</code> checkbox on the Reminders page in the user interface. This field is related to <code>UserPreference</code> and customizing activity reminders.
<code>UserPreferencesHideBiggerPhotoCallout</code>	Type boolean Properties Create, Filter, Update Description When <code>true</code> , users can choose to hide the callout text below the large profile photo.
<code>UserPreferencesHideChatterOnboardingSplash</code>	Type boolean Properties Create, Filter, Update Description When <code>true</code> , the initial Chatter onboarding prompts don't appear.
<code>UserPreferencesHideCSNDesktopTask</code>	Type boolean Properties Create, Filter, Update Description When <code>true</code> , the Chatter recommendations panel never displays the recommendation to install Chatter Desktop. This field is available in API version 26.0 and later.

Field	Details
UserPreferencesHideSfChatterMobileTask	Type boolean Properties Create, Filter, Update Description When <code>true</code>, the Chatter recommendations panel never displays the recommendation to install Chatter Mobile. This field is available in API version 26.0 and later.
UserPreferencesHideSfOnboardingAssistantModal	Type boolean Properties Create, Filter, Update Description Reserved for future use.
UserPreferencesHideLightningMigrationModal	Type boolean Properties Create, Filter, Update Description Reserved for future use.
UserPreferencesHideSecondaryOnboardingSplash	Type boolean Properties Create, Filter, Update Description When <code>true</code>, the secondary Chatter onboarding prompts don't appear.
UserPreferencesHideSfBrowserUI	Type boolean Properties Create, Filter, Update Description Controls the interface that the user sees when logging in to Salesforce from a supported mobile browser. If <code>false</code>, the user is automatically redirected to the Salesforce mobile web. If <code>true</code>, the user sees the full Salesforce site. The default value is <code>false</code>. Label is Salesforce User. This field is available in API version 29.0 or later.
UserPreferencesHideSfWelcomeMat	Type boolean

Field	Details
	Properties Create, Filter, Update Description Controls whether a user sees the Lightning Experience new user message. That message welcomes users to the new interface and provides step-by-step instructions that describe how to return to Salesforce Classic.
UserPreferencesJigsawListUser	Type boolean Properties Create, Filter, Update Description When <code>true</code>, the user is a Data.com List user so shares record additions from a pool. UserPermissionsJigsawProspectingUser must also be set to <code>true</code>. Label is Data.com List User. This field is available in API version 27.0 and later.
UserPreferencesLightningExperienceDeferral	Type boolean Properties Create, Filter, Update Description When <code>true</code>, redirects the user to the Lightning Experience interface. Label is Switch to Lightning Experience. This field is available in API version 35.0 and later.
UserPreferencesLiveAgentMasterDeflection	Type boolean Properties Create, Filter, Update Description When <code>true</code>, disables the pop-up to deflect users on Chat setup nodes to the Messaging setup. The default value is <code>false</code>. This field is available in API version 59.0 and later.
UserPreferencesNativeEmailClient	Type boolean Properties Create, Filter, Update Description Use this field to set a default email preference for the user's native email client. This field is available in API version 47.0 and later. The default value is <code>false</code>, corresponding to the Salesforce docked email composer.

Field	Details
UserPreferencesOptOutOfTouch	Type boolean Properties Create, Filter, Update Description This field is deprecated in API version 29.0. When <code>false</code>, the user automatically accesses the Salesforce Touch app when logging in to Salesforce from an iPad. If <code>true</code>, automatic access to the Salesforce Touch app is turned off and the user's iPad is directed to the full Salesforce site instead. The default value is <code>false</code>.  Note: Salesforce Touch must be enabled before this field is visible.
UserPreferencesOutboundBridge	Type boolean Properties Create, Filter, Update Description When <code>true</code>, outbound calls are made through the user's phone.
UserPreferencesPathAssistantCollapsed	Type boolean Properties Create, Filter, Update Description When <code>true</code>, Sales Path appears collapsed or hidden to the user. This field is available in API version 35.0 and later.
UserPreferencesProcessAssistantCollapsed	Type boolean Properties Create, Filter, Update Description When <code>true</code>, Sales Path appears collapsed or hidden to the user. This field is available in API versions 33.0 and 34.0 only. In API versions 35.0 and later, use <code>UserPreferencesPathAssistantCollapsed</code>.
UserPreferencesReceiveNotificationsFromApprovalProcess	Type boolean Properties Create, Filter, Update Description Controls email notifications from the approval process for <i>approvers</i>.

Field	Details
	• If <code>true</code>, emails are <i>disabled</i>. • If <code>false</code>, emails are <i>enabled</i>. The default value is <code>false</code>.  Note: The <code>Receive Approval Request Emails</code> setting in the UI controls this field and the <code>UserPreferencesReceiveNotificationsAsDelegatedApprover</code> field. • Setting: If I'm an approver or delegated approver Result: – <code>UserPreferencesReceiveNoNotificationsAsApprover</code> = <code>false</code> – <code>UserPreferencesReceiveNotificationsAsDelegatedApprover</code> = <code>true</code> • Setting: Only if I'm an approver Result: – <code>UserPreferencesReceiveNoNotificationsAsApprover</code> = <code>false</code> – <code>UserPreferencesReceiveNotificationsAsDelegatedApprover</code> = <code>false</code> • Setting: Only if I'm a delegated approver Result: – <code>UserPreferencesReceiveNoNotificationsAsApprover</code> = <code>true</code> – <code>UserPreferencesReceiveNotificationsAsDelegatedApprover</code> = <code>true</code> • Setting: Never Result: – <code>UserPreferencesReceiveNoNotificationsAsApprover</code> = <code>true</code> – <code>UserPreferencesReceiveNotificationsAsDelegatedApprover</code> = <code>false</code>
<code>UserPreferencesReceiveNotificationsAsDelegatedApprover</code>	Type boolean Properties Create, Filter, Update Description Controls email notifications from the approval process for <i>delegated approvers</i>. • If <code>true</code>, emails are <i>enabled</i>. • If <code>false</code>, emails are <i>disabled</i>. The default value is <code>false</code>.  Note: The <code>Receive Approval Request Emails</code> setting in the UI controls this field and the <code>UserPreferencesReceiveNoNotificationsAsApprover</code> field. • Setting: If I'm an approver or delegated approver

Field	Details
	Result: – UserPreferencesReceiveNoNotificationsAsApprover = false – UserPreferencesReceiveNotificationsAsDelegatedApprover = true • Setting: Only if I’m an approver Result: – UserPreferencesReceiveNoNotificationsAsApprover = false – UserPreferencesReceiveNotificationsAsDelegatedApprover = false • Setting: Only if I’m a delegated approver Result: – UserPreferencesReceiveNoNotificationsAsApprover = true – UserPreferencesReceiveNotificationsAsDelegatedApprover = true • Setting: Never Result: – UserPreferencesReceiveNoNotificationsAsApprover = true – UserPreferencesReceiveNotificationsAsDelegatedApprover = false
UserPreferencesReminderSoundOff	Type boolean Properties Create, Filter, Update Description When <code>true</code>, a sound automatically plays when an activity reminder is due. Corresponds to the <code>Play a reminder sound</code> checkbox on the Reminders page in the user interface.
UserPreferencesShowCityToExternalUsers	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the city field in the user’s contact information. City is visible only to internal members of the user’s organization when: • This field is <code>false</code>. When <code>false</code>, this field returns the value <code>#N/A</code>. City is visible to external members in an Experience Cloud site when: • This field is <code>true</code>, or • This field is <code>false</code> but <code>UserPreferencesShowCityToGuestUsers</code> is <code>true</code>, which overrides this field’s value. External users are users with Community, Customer Portal, or partner portal licenses.

Field	Details
	The default value is <code>false</code> . This field is available in API version 26.0 and later.
<code>UserPreferencesShowCityToGuestUsers</code>	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the city field in the user's contact information. When <code>true</code>, city is visible to guest users. Guest users can access public Site.com and Salesforce sites, and public pages in Experience Cloud sites, via the Guest User license associated with each site. When <code>false</code>, this field returns the value <code>#N/A</code>. When <code>true</code>, this field overrides the value <code>false</code> in <code>UserPreferencesShowCityToExternalUsers</code>, making the user's city visible to external members. The default value is <code>false</code>. This field is available in API version 28.0 and later.
<code>UserPreferencesShowCountryToExternalUsers</code>	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the country field in the user's contact information. Country is visible only to internal members of the user's organization when: - This field is <code>false</code>. When <code>false</code>, this field returns the value <code>#N/A</code>. Country is visible to external members in an Experience Cloud site when: - This field is <code>true</code>, or - This field is <code>false</code> but <code>UserPreferencesShowCountryToGuestUsers</code> is <code>true</code>, which overrides this field's value. External users are users with Community, Customer Portal, or partner portal licenses. The default value is <code>false</code>. This field is available in API version 26.0 and later.
<code>UserPreferencesShowCountryToGuestUsers</code>	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the country field in the user's contact information. When <code>true</code>, country is visible to guest users. Guest users can access public Site.com and Salesforce sites, and public pages in Experience Cloud sites, via the Guest User license associated with each site. When <code>false</code>, this field returns the value <code>#N/A</code>.

Field	Details
	When <code>true</code>, this field overrides the value <code>false</code> in <code>UserPreferencesShowCountryToExternalUsers</code>, making the user's country visible to external members. The default value is <code>false</code>. This field is available in API version 28.0 and later.
<code>UserPreferencesShowEmailToExternalUsers</code>	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the email address field in the user's contact information. Email address is visible only to internal members of the user's organization when this field is <code>false</code>. Email address is visible to external members in an Experience Cloud site when this field is <code>true</code>. External users are users with Community, Customer Portal, or partner portal licenses. When <code>false</code>, this field returns the value <code>#N/A</code>. The default value is <code>false</code>. This field is available in API version 26.0 and later.
<code>UserPreferencesShowEmailToGuestUsers</code>	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the email address field in the user's contact information. When <code>true</code>, the email address is visible to guest users. Guest users can access public Site.com and Salesforce sites, and public pages in Experience Cloud sites, via the Guest User license associated with each site. When <code>true</code>, this field overrides the value <code>false</code> in <code>UserPreferencesShowEmailToExternalUsers</code>, making the user's email address visible to guests. When <code>false</code>, this field returns the value <code>#N/A</code>. The default value is <code>false</code>. This field is available in API version 34.0 and later.
<code>UserPreferencesShowFaxToExternalUsers</code>	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the fax number field in the user's contact information. Fax number is visible only to internal members of the user's organization when this field is <code>false</code>. Fax number is visible to external members in an Experience Cloud site when this field is <code>true</code>. External users are users with Community, Customer Portal, or partner portal licenses. When <code>false</code>, this field returns the value <code>#N/A</code>. The default value is <code>false</code>. This field is available in API version 26.0 and later.

Field	Details
<code>UserPreferencesShowFaxToGuestUsers</code>	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the fax number field in the user's contact information. When <code>true</code>, the fax number field is visible to guest users. Guest users can access public Site.com and Salesforce sites, and public pages in Experience Cloud sites, via the Guest User license associated with each site. When <code>true</code>, this field overrides the value <code>false</code> in <code>UserPreferencesShowFaxToExternalUsers</code>, making the user's fax number visible to guests. When <code>false</code>, this field returns the value <code>#N/A</code>. The default value is <code>false</code>. This field is available in API version 34.0 and later.
<code>UserPreferencesShowManagerToExternalUsers</code>	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the manager field in the user's contact information. Manager is visible only to internal members of the user's organization when this field is <code>false</code>. Manager is visible to external members in an Experience Cloud site when this field is <code>true</code>. External users are users with Community, Customer Portal, or partner portal licenses. When <code>false</code>, this field returns the value <code>#N/A</code>. The default value is <code>false</code>. This field is available in API version 26.0 and later.
<code>UserPreferencesShowManagerToGuestUsers</code>	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the manager field in the user's contact information. When <code>true</code>, the manager field is visible to guest users. Guest users can access public Site.com and Salesforce sites, and public pages in Experience Cloud sites, via the Guest User license associated with each site. When <code>true</code>, this field overrides the value <code>false</code> in <code>UserPreferencesShowManagerToExternalUsers</code>, making the user's manager visible to guests. When <code>false</code>, this field returns the value <code>#N/A</code>. The default value is <code>false</code>. This field is available in API version 34.0 and later.

Field	Details
<code>UserPreferencesShowMobilePhoneToExternalUsers</code>	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the mobile device number field in the user's contact information. The number is visible only to internal members of the user's organization when this field is <code>false</code>. The number is visible to external members in an Experience Cloud site when this field is <code>true</code>. External users are users with Community, Customer Portal, or partner portal licenses. When <code>false</code>, this field returns the value <code>#N/A</code>. The default value is <code>false</code>. This field is available in API version 26.0 and later.
<code>UserPreferencesShowMobilePhoneToGuestUsers</code>	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the mobile phone field in the user's contact information. When <code>true</code>, the mobile phone field is visible to guest users. Guest users can access public Site.com and Salesforce sites, and public pages in Experience Cloud sites, via the Guest User license associated with each site. When <code>true</code>, this field overrides the value <code>false</code> in <code>UserPreferencesShowMobilePhoneToExternalUsers</code>, making the user's mobile phone visible to guests. When <code>false</code>, this field returns the value <code>#N/A</code>. The default value is <code>false</code>. This field is available in API version 34.0 and later.
<code>UserPreferencesShowPostalCodeToExternalUsers</code>	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the postal or ZIP code field in the user's contact information. Postal code is visible only to internal members of the user's organization when: - This field is <code>false</code>. When <code>false</code>, this field returns the value <code>#N/A</code>. Postal code is visible to external members in an Experience Cloud site when: - This field is <code>true</code>, or - This field is <code>false</code> but <code>UserPreferencesShowPostalCodeToGuestUsers</code> is <code>true</code>, which overrides this field's value. External users are users with Community, Customer Portal, or partner portal licenses.

Field	Details
	The default value is <code>false</code> . This field is available in API version 26.0 and later.
<code>UserPreferencesShowPostalCodeToGuestUsers</code>	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the postal or ZIP code field in the user's contact information. When <code>true</code>, postal code is visible to guest users. Guest users can access public Site.com and Salesforce sites, and public pages in Experience Cloud sites, via the Guest User license associated with each site. When <code>false</code>, this field returns the value <code>#N/A</code>. When <code>true</code>, this field overrides the value <code>false</code> in <code>UserPreferencesShowPostalCodeToExternalUsers</code>, making the user's postal code visible to external members. The default value is <code>false</code>. This field is available in API version 28.0 and later.
<code>UserPreferencesShowProfilePicToGuestUsers</code>	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the user's profile photo. When <code>true</code>, the photo is visible to guest users in an Experience Cloud site. Guest users can access public Site.com and Salesforce sites, and public pages in Experience Cloud sites, via the Guest User license associated with each site. When <code>false</code>, this field returns the stock photo. The default value is <code>false</code>. This field is available in API version 28.0 and later.
<code>UserPreferencesShowStateToExternalUsers</code>	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the state field in the user's contact information. State is visible only to internal members of the user's organization when: - This field is <code>false</code>. When <code>false</code>, this field returns the value <code>#N/A</code>. State is visible to external members in an Experience Cloud site when: - This field is <code>true</code>, or - This field is <code>false</code> but <code>UserPreferencesShowStateToGuestUsers</code> is <code>true</code>, which overrides this field's value. External users are users with Community, Customer Portal, or partner portal licenses.

Field	Details
	When <code>false</code>, this field returns the value <code>#N/A</code>. The default value is <code>false</code>. This field is available in API version 26.0 and later.
<code>UserPreferencesShowStateToGuestUsers</code>	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the state field in the user's contact information. When <code>true</code>, state is visible to guest users. Guest users can access public Site.com and Salesforce sites, and public pages in Experience Cloud sites, via the Guest User license associated with each site. When <code>false</code>, this field returns the value <code>#N/A</code>. When <code>true</code>, this field overrides the value <code>false</code> in <code>UserPreferencesShowStateToExternalUsers</code>, making the user's state visible to external members. The default value is <code>false</code>. This field is available in API version 28.0 and later.
<code>UserPreferencesShowStreetAddressToExternalUsers</code>	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the street address field in the user's contact information. The address is visible only to internal members of the user's organization when this field is <code>false</code>. The address is visible to external members in an Experience Cloud site when this field is <code>true</code>. External users are users with Community, Customer Portal, or partner portal licenses. When <code>false</code>, this field returns the value <code>#N/A</code>. The default value is <code>false</code>. This field is available in API version 26.0 and later.
<code>UserPreferencesShowStreetAddressToGuestUsers</code>	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the street address field in the user's contact information. When <code>true</code>, the street address field is visible to guest users. Guest users can access public Site.com and Salesforce sites, and public pages in Experience Cloud sites, via the Guest User license associated with each site. When <code>true</code>, this field overrides the value <code>false</code> in <code>UserPreferencesShowStreetAddressToExternalUsers</code>, making the user's street address visible to guests. When <code>false</code>, this field returns the value <code>#N/A</code>. The default value is <code>false</code>. This field is available in API version 34.0 and later.

Field	Details
UserPreferencesShowTitleToExternalUsers	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the business title field in the user's contact information. Title is visible only to internal members of the user's organization when: - This field is <code>false</code>. When <code>false</code>, this field returns the value <code>#N/A</code>. Title is visible to external members in an Experience Cloud site when: - This field is <code>true</code>, or - This field is <code>false</code> but <code>UserPreferencesShowTitleToGuestUsers</code> is <code>true</code>, which overrides this field's value. External users are users with Community, Customer Portal, or partner portal licenses. The default value is <code>true</code>. This field is available in API version 26.0 and later.
UserPreferencesShowTitleToGuestUsers	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the business title field in the user's contact information. When <code>true</code>, title is visible to guest users. Guest users can access public Site.com and Salesforce sites, and public pages in Experience Cloud sites, via the Guest User license associated with each site. When <code>false</code>, this field returns the value <code>#N/A</code>. When <code>true</code>, this field overrides the value <code>false</code> in <code>UserPreferencesShowTitleToExternalUsers</code>, making the user's title visible to external members. The default value is <code>false</code>. This field is available in API version 28.0 and later.
UserPreferencesShowWorkPhoneToExternalUsers	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the work phone number field in the user's contact information. The number is visible only to internal members of the user's organization when this field is <code>false</code>. The number is visible to external members in an Experience Cloud site when this field is <code>true</code>. External users are users with Community, Customer Portal, or partner portal licenses. When <code>false</code>, this field returns the value <code>#N/A</code>. The default value is <code>false</code>. This field is available in API version 26.0 and later.

Field	Details
<code>UserPreferencesShowWorkPhoneToGuestUsers</code>	Type boolean Properties Create, Filter, Update Description Indicates the visibility of the work phone field in the user's contact information. When <code>true</code>, the work phone field is visible to guest users. Guest users can access public Site.com and Salesforce sites, and public pages in Experience Cloud sites, via the Guest User license associated with each site. When <code>true</code>, this field overrides the value <code>false</code> in <code>UserPreferencesShowWorkPhoneToExternalUsers</code>, making the user's work phone visible to guests. When <code>false</code>, this field returns the value <code>#N/A</code>. The default value is <code>false</code>. This field is available in API version 34.0 and later.
<code>UserPreferencesSortFeedByComment</code>	Type boolean Properties Create, Filter, Update Description Specifies the data value used in sorting a user's feed. When <code>true</code>, the feed is sorted by most recent comment activity. When <code>false</code>, the feed is sorted by post date.
<code>UserPreferencesSuppressEventSFXReminders</code>	Type boolean Properties Create, Filter, Update Description When <code>true</code>, event reminders don't appear. Corresponds to the Show event reminders in Lightning Experience checkbox on the Activity Reminders page in the user interface. This field is related to UserPreference and customizing activity reminders.
<code>UserPreferencesSuppressTaskSFXReminders</code>	Type boolean Properties Create, Filter, Update Description When <code>true</code>, task reminders don't appear. Corresponds to the Show task reminders in Lightning Experience checkbox on the Activity Reminders page in the user interface. This field is related to UserPreference and customizing activity reminders.

Field	Details
UserPreferencesTaskRemindersCheckboxDefault	Type boolean Properties Create, Filter, Update Description When <code>true</code>, a reminder popup is automatically set on the user's tasks. Corresponds to the <code>By default, set reminder on Tasks to...</code> checkbox on the Reminders page in the user interface. This field is related to <code>UserPreference</code> and customizing activity reminders.
UserPreferencesUserDebugModePref	Type boolean Properties Create, Filter, Update Description When <code>true</code>, the Lightning Component framework executes in debug mode for the user. Corresponds to the <code>Debug Mode</code> checkbox on the Advanced User Details page of personal settings in the user interface.
UserRoleId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the user's <code>UserRole</code>. Label is Role ID. This is a relationship field. Relationship Name <code>UserRole</code> Relationship Type Lookup Refers To <code>UserRole</code>
UserType	Type picklist Properties Filter, Group, Nillable, Sort, Restricted picklist Description The category of user license. Each <code>UserType</code> is associated with one or more <code>UserLicense</code> records. Each <code>UserLicense</code> is associated with one or more profiles. In API version 10.0 and later, valid values include:

Field	Details
	- Standard: user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses. Label is Standard. - PowerPartner: User whose access is limited because they're a partner and typically access the application through a partner portal or Experience Cloud site. Label is Partner. - CspLitePortal: user whose access is limited because they're an org's customer and access the application through a Customer Portal or Experience Cloud site. Label is High Volume Portal. - CustomerSuccess: user whose access is limited because they're an org's customer and access the application through a Customer Portal. Label is Customer Portal User. - PowerCustomerSuccess: user whose access is limited because they're an org's customer and access the application through a Customer Portal. Label is Customer Portal Manager. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the Customer Portal role hierarchy. - CsnOnly: user whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users. Label is Chatter Free. - Guest: user whose access is limited because they're an unauthenticated user without login credentials. Label is Guest.
WirelessEmail	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description Wireless email address associated with this user. For use with Salesforce Wireless Edition. This field is available only if the Wireless and Email permissions are enabled for your organization. As of November 2005, Salesforce Wireless Edition is no longer available for purchase. You can continue to use Wireless Edition through the end of your existing contract term if you are: - A Professional Edition customer and purchased Wireless Edition before November 7, 2005. - An Enterprise Edition customer who signed or renewed their Salesforce contract before November 7, 2005.

Usage

Use this object to query information about users and to provision and modify users in your organization. Unlike other objects, the records in the User table represent actual users—not data owned by users. Any user can query or describe User records.

For example, the following SOQL code finds users with a particular user role.

```
SELECT Id, Username
FROM User
WHERE UserRoleId='00ED0000000xicT'
```

Each portal user is associated with a portal account. A portal account can have a maximum of three portal roles (Executive, Manager, and User). You can select the default number of roles to be created from the user interface. The role hierarchy is maintained when you insert and delete portal roles, and roles are created bottom-up. Deleting the User role causes the Manager role to be renamed to User role. Deleting both the Executive and User roles causes the Manager role to be renamed to User role. Before deleting a role, you must assign users under that role to another role.

Deactivate Users

You can't delete a user in the user interface or the API. You can deactivate a user in the user interface; and you can deactivate or disable a Customer Portal or partner portal user in the user interface or the API. Because users can never be deleted, we recommend that you exercise caution when creating them.

Be aware of the expected behaviors when deactivating users. See [Considerations for Deactivating Users](#). The user interface provides options to auto-remove a user from teams, but the removal isn't supported in API.

If you deactivate a user, any `EntitySubscription` where the user is associated with the `ParentId` or `SubscriberId` field, meaning all subscriptions both to and from the user, are soft deleted. If the user is reactivated, the subscriptions are restored. However, if you deactivate multiple users at once and these users follow each other, their subscriptions are hard deleted. In this case, the user-to-user `EntitySubscription` is deleted twice (double deleted). Such subscriptions can't be restored upon user reactivation.

Passwords

For security reasons, you can't query User passwords via the API or the user interface. But the API allows you to set and reset User passwords using the `setPassword()` and `resetPassword()` calls. The password lockout status and the ability to reset the User locked-out status isn't available via the API. Check and reset the User password lockout status using the user interface.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

UserChangeEvent (API version 44.0)

Change events are available for the object.

UserFeed (API version 18.0)

Feed tracking is available for the object.

UserHistory (Beta) (API version 65.0)

History is available for tracked fields of the object.

UserShare

Sharing is available for the object.

SEE ALSO:

[SOAP API Developer Guide: Frequently-Occurring Fields](#)

[UserRole](#)

[UserLicense](#)

UserAccessChange

Represents a change related to user access. This object is available in API version 57.0 and later.

UserAccessChange records are created through different access-related operations. For example, being assigned to or removed from a permission set.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

To access UserAccessChange records, users must have the View Setup and Configuration permission.

Fields

Field	Details
Source	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The source of the user access change. For example, <code>UserAccessPolicyId</code>.

UserAccessPolicy

Represents a user access policy. This object is available in API version 57.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

To create or modify user access policies, users must have the Manage User Access Policies permission.

Fields

Field	Details
BooleanFilter	Type string Properties Filter, Group, Nillable, Sort Description The logic that determines how your user criteria filters are applied in the user access policy.
Description	Type textarea Properties Filter, Group, Nillable, Sort Description Description of the user access policy.
DeveloperName	Type string Properties Filter, Group, Sort Description The unique name for the user access policy.
Language	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The language of the user access policy.
MasterLabel	Type string Properties Filter, Group, Sort

Field	Details
	Description Label for the user access policy. In the UI, this field is Label.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix associated with this object. Each Developer Edition organization that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values: • In Developer Edition organizations, the namespace prefix is set to the namespace prefix of the organization for all objects that support it. There is an exception if an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition organization of the package developer. • In organizations that are not Developer Edition organizations, <code>NamespacePrefix</code> is only set for objects that are part of an installed managed package. There is no namespace prefix for all other objects.
Order	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the order for which active policy is applied when a user meets the criteria for multiple policies. Must be an integer from 0 to 10,000. Only the active policy with the lowest <code>Order</code> value is applied. This field is required only if the <code>Status</code> field is set to <code>Active</code>. Available in API version 61.0 and later.
Status	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The status of the user access policy. Possible values are: • <code>Active</code> • <code>Completed</code> • <code>Design</code>

Field	Details
	- Failed - Migrate - Testing - Updating The default value is Design.
TriggerType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of user record trigger for which this user access policy runs. Possible values are: - Create—The user access policy runs when a user who matches the policy criteria is created. - CreateAndUpdate—The user access policy runs when a user who matches the policy criteria is either created or updated. - Update—The user access policy runs when a user who matches the policy criteria is updated.

Usage

For more information, see [User Access Policies](#) in Salesforce Help.

UserAccountTeamMember

Represents a User on the default account team of another User.

See also OpportunityTeamMember, which represents a User on the opportunity team of an Opportunity

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Customer Portal and Chatter Free users can't access this object.

Fields

Field	Details
AccountAccessLevel	Type picklist Properties Create, Filter, Restricted picklist, Update Description Required. For Account records that the user has added to his or her default account team, the level of access the account team member has. . The possible values are: • Read • Edit This field must be set to an access level that is higher than the organization's default access level for accounts.
CaseAccessLevel	Type picklist Properties Create, Filter, Restricted picklist, Update Description Required. Level of access that the account team member has to Case records related to the account. The possible values are: • None • Read • Edit This field must be set to an access level that is higher than the organization's default access level for cases.
ContactAccessLevel	Type picklist Properties Create, Filter, Restricted picklist, Update Description Required. ForContact records related to the account, the level of access that the account team member has. The possible values are: • None • Read • Edit This field must be set to an access level that is higher than the organization's default access level for contacts. When <code>DefaultContactAccess</code> is set to <code>Controlled by Parent</code>, you can't create or update this field.

Field	Details
OpportunityAccessLevel	Type picklist Properties Create, Filter, Restricted picklist, Update Description Required. Level of access that the team member has to Opportunity records related to the account. The possible values are: • None • Read • Edit This field must be set to an access level that is higher than the organization's default access level for opportunities.
OwnerId	Type reference Properties Create, Filter Description Required. ID of the User who owns the default account team.
TeamMemberRole	Type picklist Properties Create, Filter, Nillable, Update Description Role that the team member has on opportunities for which the user has added his or her default account team. The valid values are set by the organization's administrator in the Account Team Roles picklist. Label is Team Role.
UserId	Type reference Properties Create, Filter Description Required. ID of the User who is a member of the default account team. This field cannot be updated.

Usage

This object is available only in organizations that have enabled the account teams functionality, which can be done using the user interface.

If you attempt to create a record that matches an existing record, the create call updates any modified fields and returns the existing record.

You can set up a User record so the default account team includes the others who typically work with them on accounts.

UserAppInfo

Stores the last Lightning app logged in to. If the user hasn't logged into Salesforce or if the user lost access to the last accessed app, the UserAppInfo object stores a Null value. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
AppDefinitionId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the last Lightning app that the user logged in to. This field is available in API version 43.0 and later. This is a relationship field. Relationship Name AppDefinition Relationship Type Lookup Refers To AppDefinition
FormFactor	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The relative size of the app as displayed. Values are: • Small—suitable for a small device like a mobile phone • Medium—suitable for a tablet • Large—suitable for a large display device, like a monitor

Field Name	Details
	It's possible to have three versions of the app as the one last logged in to, where each version has a different form factor.
UserId	Type reference Properties Create, Filter, Group, Sort Description The ID of the user that used this app. This is a relationship field. Relationship Name User Relationship Type Lookup Refers To User

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[UserAppInfoChangeEvent](#) (API version 62.0)

Change events are available for the object.

UserAppMenuCustomization

Represents an individual user's settings for items in the app menu or App Launcher. This object is available in API version 35.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
ApplicationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The 15-character ID for the application associated with the menu item. This is a relationship field. Relationship Name Application Relationship Type Lookup Refers To ConnectedApplication
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user for these specific settings. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
SortOrder	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The index value that controls where this item appears in the menu. For example, a menu item with a sort order value of 5 will appear between items with sort order values of 3 and 9.

Usage

See the AppMenuItem object for the organization-wide default settings. This object contains the fields representing any changes the user made to the menu.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

UserAppMenuCustomizationOwnerSharingRule

Sharing rules are available for the object.

UserAppMenuCustomizationShare

Sharing is available for the object.

UserAppMenuItem

Represents the organization-wide settings for items in the app menu or App Launcher that the requesting user has access to in Setup. This object is available in API version 35.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `query()`, `search()`

Fields

Field Name	Details
AppMenuItemId	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID for the menu item.
ApplicationId	Type reference Properties Filter, Group, Nillable, Sort Description The 15-character ID for the application associated with the menu item.
Description	Type string Properties Filter, Group, Nillable, Sort Description A description of this menu item.

Field Name	Details
IconUrl	Type url Properties Filter, Group, Nillable, Sort Description The icon for the menu item's application.
InfoUrl	Type url Properties Filter, Group, Nillable, Sort Description The URL for more information about the application.
IsUsingAdminAuthorization	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, the app is pre-authorized for certain users by the administrator.
IsVisible	Type boolean Properties Defaulted on create, Filter, Group, Sort Description If <code>true</code>, the app is visible to the user.
Label	Type string Properties Filter, Group, Nillable, Sort Description The app's name.
LogoUrl	Type url Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description The logo for the menu item's application. The default is the initials of the Label value.
MobileStartUrl	Type url Properties Filter, Group, Nillable, Sort Description The location mobile users are directed to after they've authenticated. This is only used with connected apps.
Name	Type string Properties Filter, Group, Nillable, Sort Description The API name of the item.
SortOrder	Type int Properties Filter, Group, Nillable, Sort Description The index value that controls where this item appears in the menu. For example, a menu item with a sort order value of 5 will appear between items with sort order values of 3 and 9.
StartUrl	Type url Properties Filter, Group, Nillable, Sort Description The location users are directed to after they've authenticated. For a connected app, this is the location specified by the StartUrl. Otherwise it's the application's default start page.
Type	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field Name	Details
	Description The type of application represented by this item. The types are: • ConnectedApplication • Network • ServiceProvider • TabSet
UserSortOrder	Type int Properties Filter, Group, Nillable, Sort Description The index value that represents where the user set this item in the menu (or App Launcher). For example, an item with a sort order value of 5 will appear between items with sort order values of 3 and 9. This value is separate from SortOrder so you can create logic incorporating both values. For example, if you want the user-sorted items to appear first, followed by the organization order for the rest, use: <pre>SELECT ApplicationId,SortOrder,UserSortOrder FROM AppMenuItem order by userSortOrder NULLS LAST, sortOrder NULLS LAST</pre>

Usage

See the AppMenuItem object for the organization-wide default settings. This object contains the fields the requesting user has permission to see.

UserAuthCertificate

Represents a user authentication certificate in your org. A user certificate is a unique PEM-encoded X.509 digital certificate to authenticate individual users to your org. This object is available in API version 45.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

This object is only available in orgs with `Let users authenticate with a certificate` enabled in Identity Verification. Only users with the Manage Internal Users permission can access this object.

Fields

Field	Details
CertificateChain	Type base64 Properties Create, Update Description The uploaded PEM files can contain a single certificate or up to 10 certificates in a certificate chain. Uploaded PEM files can't be larger than 1 MB.
CertificateChainLength	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The auto-generated length of the certificate or certificate chain in the uploaded PEM file.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, Salesforce generates one for each record, which slows performance.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
ExpirationDate	Type dateTime Properties Filter, Sort Description The expiration date of the uploaded certificate.
Fingerprint	Type string Properties Filter, Group, idLookup, Sort

Field	Details
	Description The unique fingerprint of the uploaded certificate.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language in which to display the certificate. Possible values are: • da (Danish) • de (German) • en_US (English) • es (Spanish) • es_MX (Spanish - Mexico) • fi (Finnish) • fr (French) • it (Italian) • ja (Japanese) • ko (Korean) • nl_NL (Dutch) • no (Norwegian) • pt_BR (Portuguese - Brazil) • ru (Russian) • sv (Swedish) • th (Thai) • zh_CN (Chinese - Simplified) • zh_TW (Chinese - Traditional)
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description A descriptive name for the certificate.
SerialNumber	Type string Properties Filter, Group, Sort

Field	Details
	Description The serial number of the uploaded certificate.
UserID	Type reference Properties Create, Filter, Group, Sort, Update Description The user associated with the certificate.

UserConfigTransferButton

Represents the association between a Chat configuration and a live chat button. This association allows users associated with a specific configuration to transfer chats to a button queue.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, only authenticated internal and external users can access this object.

Fields

Field Name	Details
LiveChatButtonId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the live chat button that agents can transfer chats to.
LiveChatUserConfigId	Type reference Properties Create, Filter, Group, Sort

Field Name	Details
	Description The ID of the Chat configuration; agents associated with this configuration can transfer chats to the chat button indicated by the <code>LiveChatButtonId</code> .

UserConfigTransferSkill

Represents the association between a Chat configuration and a skill. This association allows users associated with a specific configuration to transfer chats to agents who have that skill.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
<code>LiveChatUserConfigId</code>	Type reference Properties Create, Filter, Group, Sort Description The ID of the Chat configuration; agents associated with this configuration can transfer chats to the chat button indicated by the <code>LiveChatButtonId</code> .
<code>SkillId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the skill group that agents can transfer chats to.

UserCustomBadge

Represents a custom badge for a user. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
BadgeType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of badge. Valid values are: • Customer • Partner • Employee
CustomText	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Custom text for the badge.
ParentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the Experience Cloud site or org that the badge is in.

UserCustomBadgeLocalization

Represents the translated version of a custom badge for a user. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Special Access Rules

- Translation Workbench must be enabled for your org.
- Users with the “Customize Application” or “Manage Translation” permission can create or update UserCustomBadge translations.

Fields

Field Name	Details
Language	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The language the UserCustomBadge is translated into. This picklist contains these fully supported languages. - Chinese (Simplified): zh_CN - Chinese (Traditional): zh_TW - Danish: da - Dutch: nl_NL - English: en_US - Finnish: fi - French: fr - German: de - Italian: it - Japanese: ja - Korean: ko - Norwegian: no - Portuguese (Brazil): pt_BR - Russian: ru - Spanish: es - Spanish (Mexico): es_MX Spanish (Mexico) defaults to Spanish for customer-defined translations. - Swedish: sv - Thai: th The Salesforce user interface is fully translated to Thai, but Help is in English.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the namespacePrefix__componentName notation. The namespace prefix can have one of the following values.

Field Name	Details
	• In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
ParentId	Type reference Properties Create, Filter, Group, Sort Description ID of the UserCustomBadge.
Value	Type string Properties Create, Filter, Sort, Update Description The translated text for the UserCustomBadge. Label is Translation Text.

UserDailyMetric

Represents the daily engagement metrics for a user. This object is available in API version 52.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Sales Engagement must be enabled.

Fields

Field	Details
AllCallsCallBackLater	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The number of calls in the day for this user with the call result Call Back Later.
AllCallsLeftVoicemail	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the day for this user with the call result Left Voicemail.
AllCallsMeaningfulConnect	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the day for this user with the call result Meaningful Connect.
AllCallsNotInterested	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the day for this user with the call result Not Interested.
AllCallsUncategorized	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the day for this user with no call result specified.
AllCallsUnqualified	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the day for this user with the call result Unqualified.
AllEmailsBouncedCount	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The total of hard and soft bounced emails for this user in the day. This is a calculated field.
AllEmailsDeliveredCount	Type int Properties Filter, Group, Nillable, Sort Description The number of successfully delivered emails for this user in the day. This is a calculated field.
AllEmailsHardBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of hard bounced emails for this user in the day.
AllEmailsNotDeliveredCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails that were undelivered for all recipients on the email. Available in API version 54.0 and later. This is a calculated field.
AllEmailsOutOfOfficeCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails that triggered an out-of-office reply for this user in the day.
AllEmailsSentCount	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of emails sent by this user in the day. This is a calculated field.
AllEmailsSoftBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails soft bounced for this user in the day.
AllEmailsTrackedSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent by this user with engagement tracking enabled in the day.
AllEmailsUntrackedSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent by this user without engagement tracking enabled in the day.
AllTotalCallsCount	Type int Properties Filter, Group, Nillable, Sort Description The total number of calls by this user with all call results in the day. This is a calculated field.
DailyCutOffTimeStamp	Type dateTime Properties Filter, Sort Description The time of day when each 24-hour metrics period starts and ends.

Field	Details
Date	Type date Properties Filter, Group, Sort Description The date on which the engagement occurred.
DateInt	Type int Properties Filter, Group, idLookup, Sort Description The date on which the engagement occurred, in yyyyymmdd format.
HardBounceTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent with hard bounce tracking. Available in API version 53.0 and later.
LinkClickTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent with link click tracking. Available in API version 53.0 and later.
OpenTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent with open tracking. Available in API version 53.0 and later.
OutOfOfficeTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent with out-of-office tracking. Available in API version 53.0 and later.

Field	Details
RecipientReplies	Type int Properties Filter, Group, Nillable, Sort Description The number of unique recipients who responded to an email. Available in API version 53.0 and later.
RecipientSends	Type int Properties Filter, Group, Nillable, Sort Description The number of unique recipients who were sent an email. Available in API version 53.0 and later.
ReplyTrackableRecipientSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who were sent an email with reply tracking. Available in API version 53.0 and later.
ReplyTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent with reply tracking. Available in API version 53.0 and later.
SoftBounceTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent with soft bounce tracking. Available in API version 53.0 and later.
SomeEmailsDeliveredCount	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of emails that were successfully delivered to at least one recipient on the email. Available in API version 54.0 and later. This is a calculated field.
SomeEmailsDeliveredRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails that were successfully delivered to at least one recipient on the email. Available in API version 54.0 and later. This is a calculated field.
TrackableRecipientSendReplyRt	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with reply tracking that received replies from unique recipients. Available in API version 53.0 and later. This is a calculated field.
TrackableSendHardBounceRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with hard bounce tracking that hard bounced. Available in API version 54.0 and later. This is a calculated field.
TrackableSendLinkClickRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with link tracking that had link clicks. Available in API version 53.0 and later. This is a calculated field.

Field	Details
TrackableSendOpenRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with open tracking that were opened by a recipient. Available in API version 53.0 and later. This is a calculated field.
TrackableSendOutOfOfficeRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with out-of-office tracking that received out-of-office replies. Available in API version 54.0 and later. This is a calculated field.
TrackableSendReplyRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with reply tracking that received replies. Available in API version 53.0 and later. This is a calculated field.
TrackableSendSoftBounceRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with soft bounce tracking that soft bounced. Available in API version 54.0 and later. This is a calculated field.
UniqueEmailsLinkClickedCount	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of unique recipients who clicked a link in an email sent by the user on the day.
UniqueEmailsOpenedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of unique recipients who opened an email sent by the user on the day.
UniqueEmailsRepliedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of unique recipients who replied to an email sent by the user on the day.
UserId	Type reference Properties Filter, Group, Sort Description The ID of the related user. This is a relationship field. Relationship Name User Relationship Type Lookup Refers To User

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[UserDailyMetricOwnerSharingRule](#)

Sharing rules are available for the object.

[UserDailyMetricShare](#) on page 67

Sharing is available for the object.

UserDailyMetricOwnerSharingRule

Represents the rules for sharing the user daily metric with users other than the owner.



Note: To enable access to this object for your org, contact Salesforce customer support. However, we recommend that you instead use Metadata API to programmatically update owner sharing rules because it triggers automatic sharing rule recalculation. The [SharingRules](#) Metadata API type is enabled for all orgs.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Sales Engagement must be enabled.

Fields

Field	Details
AccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Determines the level of access users have to records. Values are: • Read (read only) • Edit (read/write)
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Description of the sharing rule. Maximum length is 1000 characters.
DeveloperName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a

Field	Details
	letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
GroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the source group. Records that are owned by users in the source group trigger the rule to give access.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Label of the sharing rule as it appears in the UI. Maximum length is 80 characters.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the user or group that you are granting access to.

Usage

Use this object to manage the sharing rules for cases. General sharing and territory management-related sharing use this object.

SEE ALSO:

[UserDailyMetric](#)

[Metadata API Developer Guide: SharingRules](#)

UserDefinedLabel

Represents a label created by a user to help organize, track, and find records. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Color	Type string Properties Create, Filter, Group, Sort, Update Description Hexadecimal value of the color used to help organize the UserDefinedLabel records.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly. For example, accessed through a list view or related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, and <code>LastReferenceDate</code> is not null, the user accessed this record or list view indirectly. For example, accessed through a list view or related record.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the UserDefinedLabel record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description ID of the user or group that owns the label. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
TotalAssignments	Type int Properties Filter, Group, Nillable, Sort Description Calculated field. Number of related UserDefinedLabelAssignment records. Available in API version 62.0 and later.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Type of user-defined label. Possible values are: - Starred - Tag - User

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[UserDefinedLabelOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[UserDefinedLabelShare](#) on page 67

Sharing is available for the object.

UserDefinedLabelAssignment

Represents a relationship between a record label and the item the user assigned it to. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
EntityType	Type string Properties Filter, Group, Nillable, Sort Description Object label of the Item record derived from ItemId. Available in API version 62.0 and later.
ItemId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the Item record added to the UserDefinedLabel record. This field is a polymorphic relationship field. Relationship Name Item Refers To Account, ActionCadence, ActionCadenceStepTracker, CallTemplate, Case, Contact, EmailTemplate, FlowOrchestrationWorkItem, Lead, Opportunity, Task
LabelId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the UserDefinedLabel record that the Item record is assigned to. This field is a relationship field. Relationship Name Label Refers To UserDefinedLabel
OwnerId	Type reference

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the user or group that owns this record. This field is a polymorphic relationship field. Relationship Name Owner Refers To Group, User
SortOrder	Type int Properties Filter, Group, idLookup, Nillable, Sort Description Order of the assigned items for a given UserDefinedLabel record.
SubjectOrName	Type string Properties Filter, Group, Nillable, Sort Description Name of the Item record. If it's a task, the value is the subject of the Item record.

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[UserDefinedLabelAssignmentOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[UserDefinedLabelAssignmentShare](#) on page 67

Sharing is available for the object.

UserDevice

Represents information unique to a device. Available in API version 43.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

You must have View Devices enabled to see devices.

Fields

Field Name	Details
BrowserType	Type string Properties Filter, Group, Nillable, Sort Description The browser used for login.
DeviceNativeUid	Type string Properties Filter, Group, idLookup, Nillable, Sort Description A unique string used to identify a mobile device.
DeviceType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The device used to log in to Salesforce. The picklist options are: • Desktop • Tablet • iPad • iPhone • Phone • Unknown
IsVerified	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Reserved for future use.

Field Name	Details
LastLoginHistoryId	Type reference Properties Filter, Group, Nillable, Sort Description The most recent LoginHistory associated with the device.
Name	Type string Properties Filter, Group, idLookup, Sort Description This field is system-generated and can't be changed.
PlatformType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The operating system of the device. The picklist options are: • iOS • Android • OSX • Linux • Phone • Windows • AppleApp • Blackberry • Other
PlatformVersion	Type string Properties Filter, Group, Nillable, Sort Description The version of the operating system running on the device.
Status	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field Name	Details
	Description The activity status of the device. The picklist options are: • Approved • Pending Approval • Revoked
UserId	Type reference Properties Filter, Group, Sort Description The ID of the user.
UserLastSeen	Type dateTime Properties Filter, Nillable, Sort Description The date and time of the user's last access.
UserProvidedDeviceIdentifier	Type string Properties Filter, Group, Nillable, Sort, Update Description An identifier for the user's device such as the International Mobile Equipment Identity (IMEI) number or the device serial number.  Note: This field isn't automatically populated. The developer must provide values.

UserDeviceApplication

Represents information on applications installed on a device that is accessing Salesforce. Available in API version 43.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

You must have View Devices enabled to see devices.

Fields

Field Name	Details
ApplicationType	Type string Properties Filter, Group, Nillable, Sort Description The type of application used to log in to Salesforce.
Name	Type string Properties Filter, Group, idLookup, Sort Description This field is system-generated and cannot be changed.
Status	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The activity status of the device application. The picklist options are: • Approved • Pending Approval • Revoked
UserDeviceId	Type reference Properties Filter, Group, Nillable, Sort Description The unique identifier used to identify a device when tracking events. <code>UserDeviceId</code> is a generated value that's created when the mobile app is initially run after installation.
UserId	Type reference

Field Name	Details
	Properties Filter, Group, Sort
	Description The ID of the user.

UserDeviceHistory

Represents tracking information on the UserDevice sObject. This object is available in API version 50.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Fields

Field	Details
<code>DataType</code>	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description The type of data that has changed. Possible values are: • Address • AnyType • AutoNumber • Base64 • BitVector • Boolean • Content • Currency • DataCategoryGroupReference • DateOnly • DateTime • Division • Double

Field	Details
	• DynamicEnum • Email • EncryptedBase64 • EncryptedText • EntityId • EnumOrId • ExternalId • Fax • File • HtmlMultiLineText • HtmlStringPlusClob • InetAddress • Json • Location • MultiEnum • MultiLineText • Namespace • Percent • PersonName • Phone • Raw • RecordType • SfdcEncryptedText • SimpleNamespace • StringPlusClob • Switchable_PersonName • Text • TimeOnly • Url • YearQuarter
Field	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The field that has changed. Possible values are:

Field	Details
	• <code>BrowserType</code>—Browser • <code>DeviceNativeUid</code>—Device Native ID • <code>DeviceType</code>—Device Type • <code>HashedBrowserFingerPrint</code>—Hashed Browser Fingerprint • <code>IsVerified</code>—Is Device Verified • <code>LastLoginHistory</code>—Login History • <code>Name</code> • <code>PlatformType</code>—Platform or OS Type • <code>PlatformVersion</code>—Platform or OS Version • <code>RawBrowserFingerPrint</code>—Raw Browser Fingerprint Data • <code>Status</code>—Device Status • <code>User</code> • <code>UserLastSeen</code>—Last time user was seen • <code>UserProvidedDeviceIdentifier</code>—User provided device identifier • <code>created</code>—Created. • <code>feedEvent</code>—Feed event • <code>individualMerged</code>—Individual Merged • <code>locked</code>—Record locked. • <code>ownerAccepted</code>—Owner (Accepted) • <code>ownerAssignment</code>—Owner (Assignment) • <code>unlocked</code>—Record unlocked.
NewValue	Type anyType Properties Nillable, Sort Description The value after a change has occurred.
OldValue	Type anyType Properties Nillable, Sort Description The value before a change has occurred.
UserDeviceId	Type reference Properties Filter, Group, Sort

Field	Details
	Description The ID of the UserDevice object.

UserEmailCalendarSync

Represents the user assignments of an Einstein Activity Capture configuration. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `update()`, `upsert()`

Special Access Rules

To access this object, enable Einstein Activity Capture in your org.

Fields

Field	Details
AssignedId	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the user or profile. Only Einstein Activity users can be added to a configuration.
ConfigurationId	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the Einstein Activity Capture configuration. The configuration is created in Salesforce Setup. After the configuration is created, the autogenerated ID is visible on the Configurations tab. From Setup, in the Quick Find box, enter <i>Einstein Activity Capture</i> , and then select Settings . Click the Configurations tab.

Usage

Use UserEmailCalendarSync to add and remove users to an Einstein Activity Capture configuration. You can add users to a configuration via a user ID or a profile ID. You can add a profile to only one configuration and assign a profile to only one user.

This example adds two users to an Einstein Activity Capture configuration.

```
// Create a list of UserEmailCalendarSync records
List<UserEmailCalendarSync> usersToAdd = new ArrayList<>();

// Populate the UserEmailCalendarSync record with the ID of
// the user or profile, and with the ID of the Activity Capture configuration you are
// adding them to
UserEmailCalendarSync user1 = new UserEmailCalendarSync(ConfigurationId = '0063xxxxxxxxxx',
    AssignedId = '005xxxxxxxxxxxxx');

UserEmailCalendarSync user2= new UserEmailCalendarSync(ConfigurationId = '0063xxxxxxxxxx',
    AssignedId = '005xxxxxxxxxxxxx');

// add the UserEmailCalendarSync users to your list
usersToAdd.add(user1);
usersToAdd.add(user2);

// Insert the list of UserEmailCalendarSync into the database
Database.SaveResult[] results = Database.insertImmediate(usersToAdd);
```

This example removes a user from an Einstein Activity Capture configuration.

To remove a user, call `UserEmailCalendarSync()`, passing in `null` for `ConfigurationId`.

```
UserEmailCalendarSync user2Remove= new UserEmailCalendarSync(ConfigurationId = "", AssignedId
    ='005xxxxxxxxxxxxx');
Database.SaveResult results =Database.insertImmediate(user2Remove);
```

UserEmailPreferredPerson

Represents a mapping for a user's preferred record for an email address when multiple records match an email field. This object is available in API version 44.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, only authenticated internal and external users can access this object.

Fields

Field	Details
Email	Type email

Field	Details
	Properties Create, Filter, Group, idLookup, Sort, Update Description Required. The unique email the mapping applies to. This field is unique for each user.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Read-only. Auto-generated field.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Required. The userId that owns the record. Each record is only accessible to the owner. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PersonRecordId	Type reference Properties Create, Filter, Group, Sort, Update Description Required. The recordId of a contact, lead, or user that represents the preferred record for the email address. Use cascade delete for contact and lead, and delete if the personId is a deactivated user record. This is a polymorphic relationship field. Relationship Name PersonRecord Relationship Type Lookup Refers To Contact, Lead, User

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

UserEmailPreferredPersonChangeEvent (API version 62.0)

Change events are available for the object.

UserEmailPreferredPersonShare

Sharing is available for the object.

UserEmailPreferredPersonShare

Represents a sharing entry on a UserEmailPreferredPerson object. Sharing is not customizable for UserEmailPreferredPerson records. This object is available in API version 44.0 and later.

You can only create, edit, and delete sharing entries for standard objects whose RowCause field is set to Manual. Sharing entries for standard objects with different RowCause values are created as a result of your Salesforce org’s sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren’t stored at all.

 **Note:** While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it’s possible that we’ll stop storing certain share records to improve performance. As a best practice, don’t create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
AccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. The level of access allowed. Values can be: - All - Edit - Read .
ParentId	Type reference Properties Create, Filter, Group, Sort,

Field	Details
	Description Id of the parent record, if any. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To UserEmailPreferredPerson
RowCause	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Description Required. Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is <code>Manual</code>. If no value is specified, the field defaults to <code>Manual</code>. All other <code>RowCause</code> values are read-only. After the sharing entry is created, this field can't be edited. Valid values can include: • <code>Manual</code>—The User or Group has access because a user with All access manually shared the record with them. • <code>Owner</code>—The User is the owner of the record or is in a role above the record owner in the role hierarchy.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort, Description Required. ID of the user or group that has been given access to the <code>UserEmailPreferredPerson</code> record. The <code>UserOrGroupId</code> is polymorphic. The label is <code>User/Group Id</code>. This is a polymorphic relationship field. Relationship Name UserOrGroup Relationship Type Lookup Refers To Group, User

UserLicense

Represents a user license in your organization. A user license entitles a user to specific functionality and determines the profiles and permission sets available to the user.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
<code>LicenseDefinitionKey</code>	Type string Properties Filter, Group, Sort Description A string that uniquely identifies a particular user license. Label is <code>License Def. ID</code>. Values are: AUL: corresponds to the Salesforce Platform user license AUL1: corresponds to the Salesforce Platform One user license AUL_LIGHT corresponds to the Salesforce Platform Light user license FDC_ONE corresponds to the Lightning Platform - One App user license FDC_SUB corresponds to the Lightning Platform App Subscription user license Overage_Platform_Portal_User corresponds to the Overage Authenticated Website user license PID_STRATEGIC_PRM: corresponds to the Gold Partner user license PID_CHATTER corresponds to the Chatter Only user license PID_CONTENT corresponds to the Content Only user license PID_Customer_Portal_Basic: corresponds to the Customer Portal Manager Standard user license and the Customer Portal User license PID_Customer_Portal_Standard: corresponds to the Customer Portal Manager Custom user license PID_FDC_FREE corresponds to the Lightning Platform Free user license PID_IDEAS corresponds to the Ideas Only user license PID_Ideas_Only_Portal corresponds to the Ideas Only Portal user license PID_Ideas_Only_Site corresponds to the Ideas Only Site user license PID_KNOWLEDGE corresponds to the Knowledge Only user license PID_Customer_Community corresponds to the Customer Community license.

Field	Details
	PID_Customer_Community_Login corresponds to the Customer Community Login license. PID_Partner_Community corresponds to the Partner Community license. PID_Partner_Community_Login corresponds to the Partner Community Login license. PID_Limited_Customer_Portal_Basic: corresponds to the Limited Customer Portal Manager Standard user license PID_Limited_Customer_Portal_Standard: corresponds to the Limited Customer Portal Manager Custom user license PID_Overage_Customer_Portal_Basic: corresponds to the Overage Customer Portal Manager Standard user license PID_Overage_High Volume Customer Portal corresponds to the Overage High Volume Customer Portal user license Platform_Portal_User: corresponds to the Authenticated Website user license POWER_PRM: corresponds to the Partner user license POWER_SSP: corresponds to the Customer Portal Manager user license SFDC: corresponds to the Full CRM user license
MasterLabel	Type string Properties Filter, Group, Sort Description The user license label. This field is available in API version 32.0 and later.
MonthlyLoginsEntitlement	Type int Properties Filter, Group, Nillable, Sort Description The maximum number of customer or partner portal logins allowed per month. A null value in this field means the user license is charged according to the number of users rather than the number of logins. This field is available in API version 20.0 and later.  Note: To be visible and queryable, this field requires: - Digital Experiences enabled - the View Setup and Configuration user permission

Field	Details
MonthlyLoginsUsed	Type int Properties Group, Nillable, Sort Description The number of successful logins for all users associated with a customer or partner portal user license. This field has a non-null value if MonthlyLoginsEntitlement has a non-null value. This field is available in API version 20.0 and later.  Note: To be visible and queryable, this field requires: • Digital Experiences enabled • the View Setup and Configuration user permission
Name	Type string Properties Filter, Group, idLookup, Sort Description The internal name of the user license.  Note: Your organization may also include custom user licenses.
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The current status of the user license. Valid values for this field are Active and Disabled. This field is available in API version 32.0 and later.
TotalLicenses	Type int Properties Filter, Group, Sort Description The number of user licenses in the organization. This field is available in API version 32.0 and later.
UsedLicenses	Type int

Field	Details
	Properties Filter, Group, Sort Description The number of user licenses that are assigned to active users in the organization. This field is available in API version 32.0 and later. This field isn't filterable in API version 64.0 or later when using it in a WHERE clause in a SOQL query. Instead, you have to process the data after fetching all the records.
UsedLicensesLastUpdated	Type dateTime Properties aggregate, Filter, Sort Description The timestamp of the query. If your license count exceeds your org's allotted threshold, the count timestamp reflects the previous day, otherwise the timestamp reflects the current day and time. This field is available in API version 41.0 and later.

Usage

Users with the "View Setup and Configuration" permission can use the UserLicense object to view the set of currently defined user licenses in your organization.

The UserLicense object is currently used by bulk user creation to determine the user license to which each profile and permission set belongs. For example, if you use the API to create portal users and you want to know which profile belongs to each portal user license, you can query this object for each profile and check the `LicenseDefinitionKey` to identify the associated user license.

SEE ALSO:

[Profile](#)

[PermissionSet](#)

UserListView

Represents the customizations a user made to a list view. This object is available in API version 32.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Name	Details
LastViewedChart	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The last chart a user viewed.
ListViewId	Type reference Properties Create, Filter, Group, Sort Description The ID of the list view. This is a relationship field. Relationship Name ListView Relationship Type Lookup Refers To ListView
SubjectType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The API name of the sObject for the user list view.
UserId	Type reference Properties Create, Filter, Group, Sort Description The ID of the user. This is a relationship field. Relationship Name User Relationship Type Lookup

Name	Details
	Refers To User

UserListViewCriterion

Represents the criterion for a user's customized list view. The criterion consists of the filters or sort order a user added to a list view for the Salesforce Mobile app. This object is available in API version 32.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Name	Details
ColumnName	Type string Properties Create, Filter, Group, Sort, Update Description The name of the column in the user list view.
Operation	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The criteria to apply, such as "equals" or "starts with."
SortOrder	Type int Properties Create, Filter, Group, Sort, Update Description The order in which the list view is evaluated compared to other UserListViewCriterion objects for the given UserListView.
UserListViewId	Type reference

Name	Details
	Properties Create, Filter, Group, Sort Description The ID of the user list view. This is a relationship field. Relationship Name UserListView Relationship Type Lookup Refers To UserListView
Value	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The field values used to filter the list view. For example, a value of 94105 if the Field is Billing Zip/Postal Code shows only rows that have a billing ZIP code of 94105.

UserLocationAssignment

Represents the assignment between a location and a user. This object is available in API version 57.0 and later.

Supported Calls:

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(), search(), undelete(), update(), upsert()

Special Access Rules:

This object is only available in Salesforce Order Management orgs.

Fields

Field	Details
UserLocationAssignmentNumber	Type text

Field	Details
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Auto-generated number for the association
AssignedTo	Type foreignkey (user) Properties Create, Filter, Group, Sort, Update Description User being associated with the location
Location	Type foreignkey (location) Properties Create, Filter, Group, Sort, Update Description Location being associated to the User
Username	Type string (derived) Properties Filter, Sort Description Username of the User that is associated to the Location
IsActive	Type boolean Properties Create, Filter, Group, Sort, Update Description Whether the location is active or not

Usage:

The UserLocationAssignment object associates a user to specified work locations. To assign a user to multiple locations, create Multiple UserLocationAssignment objects. Use the isActive field to indicates the user's current active location.

UserLogin

Represents the settings that affect a user's ability to log into an organization. To access this object, you need the `UserPermissions.ManageUsers` permission. This object is available in API version 29.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`, `update()`

Fields

Field Name	Details
IsFrozen	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description If <code>true</code>, the user account associated with this object is frozen. If a user's account is frozen, they can't log in, but their account isn't deactivated.
IsPasswordLocked	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description If <code>true</code>, the user account associated with this object is locked because of too many login failures. From the API, you can set this field to <code>false</code>, but not <code>true</code>.  Note: If the Lockout effective period is set to Forever (must be reset by admin) in your org's Password Policies Setup page, this field isn't set to <code>false</code>.
UserId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the associated user account. This field can't be updated.

Usage

To query for all frozen users in your organization:

```
SELECT Id, UserId
FROM UserLogin
WHERE IsFrozen = true
```

To freeze or unfreeze multiple users, [use Data Loader](#).

UserMembershipSharingRule

Represents the rules for sharing user records from a source group to a target group. A user record contains details about a user. Users who are members of the source group can be shared with members of the target group. The source and target groups can be based on roles, portal roles, public groups, or territories. This object is available in API version 26.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Special Access Rules

As of Spring '20 and later, only users with the View Setup and Configuration permission can access this object, and only users with the Manage Sharing permission can edit this object.

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description A description of the sharing rule. Maximum size is 1000 characters. This field is available in API version 29.0 and later.
DeveloperName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts

Field	Details
	on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Corresponds to Rule Name in the user interface.  Note: When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
GroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the source group.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Label of the sharing rule as it appears in the user interface. Limited to 80 characters. Corresponds to Label on the user interface.
UserAccessLevel	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A value that represents the type of sharing being allowed. The possible values are: • Read • Edit
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description The ID representing the target group being given access.

Usage

Use this object to manage sharing rules for user records. Source and target groups can include internal users, portal users, Chatter or Chatter External users.

UserMonthlyMetric

Represents the monthly engagement metrics for a user. This object is available in API version 52.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Sales Engagement must be enabled.

Fields

Field	Details
<code>AllCallsCallBackLater</code>	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this user with the call result Call Back Later.
<code>AllCallsLeftVoicemail</code>	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this user with the call result Left Voicemail.
<code>AllCallsMeaningfulConnect</code>	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this user with the call result Meaningful Connect.
<code>AllCallsNotInterested</code>	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this user with the call result Not Interested.
AllCallsUncategorized	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this user with no call result specified.
AllCallsUnqualified	Type int Properties Filter, Group, Nillable, Sort Description The number of calls in the month for this user with the call result Unqualified.
AllEmailsBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The total of hard and soft bounced emails sent by this user in the month. This is a calculated field.
AllEmailsDeliveredCount	Type int Properties Filter, Group, Nillable, Sort Description The number of successfully delivered emails sent by this user in the month. This is a calculated field.
AllEmailsHardBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of hard bounced emails sent by this user in the month.

Field	Details
AllEmailsLinkClickedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails containing a link clicked by the recipient sent by this user in the month.
AllEmailsNotDeliveredCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails that were undelivered for all recipients on the email. Available in API version 54.0 and later.
AllEmailsOpenedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails opened by the recipient sent by this user in the month.
AllEmailsOutOfOfficeCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails that triggered an out-of-office reply sent by this user in the month.
AllEmailsRepliedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails replied to for this user in the month.
AllEmailsSentCount	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The number of emails sent by this user in the month. This is a calculated field.
AllEmailsSoftBouncedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent by this user that soft bounced in the month.
AllEmailsTrackedSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent by this user with engagement tracking enabled in the month.
AllEmailsUntrackedSentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent by this user without engagement tracking enabled in the month.
AllTotalCallsCount	Type int Properties Filter, Group, Nillable, Sort Description The total number of calls with all call results for this user in the month. This is a calculated field.
DeliveredRecipientCount	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who successfully received an email. Available in API version 53.0 and later. This is a calculated field.

Field	Details
DeliveredRecipientRate	Type percent Properties Filter, Nillable, Sort Description The percentage of unique recipients who successfully received an email. Available in API version 53.0 and later. This is a calculated field.
HardBounceTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent with hard bounce tracking. Available in API version 53.0 and later.
HrdBncTrackableRecipientSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who were sent an email with hard bounce tracking. Available in API version 53.0 and later.
LinkClickTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent with link click tracking. Available in API version 53.0 and later.
LinkClkTrackableRecipientSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who were sent an email with link click tracking. Available in API version 53.0 and later.
Month	Type date

Field	Details
	Properties Filter, Group, Sort Description The month in which the engagement occurred.
MonthInt	Type int Properties Filter, Group, idLookup, Sort Description The month in which the engagement occurred, in yyyy-mm format.
OooTrackableRecipientSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who were sent an email with out-of-office tracking. Available in API version 53.0 and later.
OpenTrackableRecipientSends	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who were sent an email with open tracking. Available in API version 53.0 and later.
OpenTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent with open tracking. Available in API version 53.0 and later.
OutOfOfficeTrackableSends	Type int Properties Filter, Group, Nillable, Sort Description The number of emails sent with out-of-office tracking. Available in API version 53.0 and later.

Field	Details
RecipientReplies	Type int Properties Filter, Group, Nillable, Sort Description The number of unique recipients who responded to an email. Available in API version 53.0 and later.
RecipientSends	Type int Properties Filter, Group, Nillable, Sort Description The number of unique recipients who were sent an email. Available in API version 53.0 and later.
RecipientsHardBounced	Type int Properties Filter, Group, Nillable, Sort Description The number of email recipients who were sent an email that hard bounced. Available in API version 54.0 and later.
RecipientsOutOfOffice	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who responded with an out-of-office reply. Available in API version 54.0 and later.
RecipientsSoftBounce	Type int Properties Filter, Group, Nillable, Sort Description The number of recipients who were sent an email that soft bounced. Available in API version 54.0 and later.
ReplyTrackableRecipientSends	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort
	Description The number of recipients who were sent an email with reply tracking. Available in API version 53.0 and later.
ReplyTrackableSends	Type int
	Properties Filter, Group, Nillable, Sort
	Description The number of emails sent with reply tracking. Available in API version 53.0 and later.
SftBncTrackableRecipientSends	Type int
	Properties Filter, Group, Nillable, Sort
	Description The number of recipients who were sent an email with soft bounce tracking. Available in API version 53.0 and later.
SoftBounceTrackableSends	Type int
	Properties Filter, Group, Nillable, Sort
	Description The number of emails sent with soft bounce tracking. Available in API version 53.0 and later.
SomeEmailsDeliveredCount	Type int
	Properties Filter, Group, Nillable, Sort
	Description The number of emails that were successfully delivered to at least one recipient on the email. Available in API version 54.0 and later. This field is a calculated field.
SomeEmailsDeliveredRate	Type percent
	Properties Filter, Nillable, Sort

Field	Details
	Description The percentage of emails that were successfully delivered to at least one recipient on the email. Available in API version 54.0 and later. This field is a calculated field.
TrackableRecipientSendHrdBncRt	Type percent Properties Filter, Nillable, Sort Description The percentage of unique recipients who hard bounced an email with hard bounce tracking. Available in API version 54.0 and later. This field is a calculated field.
TrackableRecipientSendOooRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with out-of-office tracking that resulted in out-of-office replies from unique recipients. This field is a calculated field. Available in API version 54.0 and later. This field is a calculated field.
TrackableRecipientSendReplyRt	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with reply tracking that received replies from unique recipients. Available in API version 54.0 and later. This field is a calculated field.
TrackableRecipientSendSftBncRt	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent to unique recipients with soft bounce tracking that soft bounced. This field is a calculated field. Available in API version 54.0 and later.

Field	Details
TrackableSendHardBounceRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with hard bounce tracking that hard bounced. Available in API version 54.0 and later. This field is a calculated field.
TrackableSendLinkClickRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with link tracking that had link clicks. Available in API version 53.0 and later. This field is a calculated field.
TrackableSendOpenRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with open tracking that were opened by a recipient. Available in API version 53.0 and later. This field is a calculated field.
TrackableSendOutOfOfficeRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with out-of-office tracking that received out-of-office replies. Available in API version 54.0 and later. This field is a calculated field.
TrackableSendReplyRate	Type percent Properties Filter, Nillable, Sort

Field	Details
	Description The percentage of emails sent with reply tracking that received replies. Available in API version 53.0 and later. This field is a calculated field.
TrackableSendSoftBounceRate	Type percent Properties Filter, Nillable, Sort Description The percentage of emails sent with soft bounce tracking that soft bounced. Available in API version 54.0 and later. This field is a calculated field.
UniqueEmailsLinkClickedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of unique recipients who clicked a link in an email sent by this user in the month.
UniqueEmailsOpenedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of unique recipients who opened an email sent by this user in the month.
UniqueEmailsRepliedCount	Type int Properties Filter, Group, Nillable, Sort Description The number of unique recipients who replied to an email sent by this user in the month.
UserId	Type reference Properties Filter, Group, Sort Description The ID of the related user.

Field	Details
	This is a relationship field.
	Relationship Name User
	Relationship Type Lookup
	Refers To User

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[UserMonthlyMetricOwnerSharingRule](#)

Sharing rules are available for the object.

[UserMonthlyMetricShare](#) on page 67

Sharing is available for the object.

UserMonthlyMetricOwnerSharingRule

Represents the rules for sharing the user monthly metric with users other than the owner.



Note: To enable access to this object for your org, contact Salesforce customer support. However, we recommend that you instead use Metadata API to programmatically update owner sharing rules because it triggers automatic sharing rule recalculation. The [SharingRules](#) Metadata API type is enabled for all orgs.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Sales Engagement must be enabled.

Fields

Field	Details
<code>AccessLevel</code>	Type picklist
	Properties Create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description Determines the level of access users have to records. Values are: • Read (read only) • Edit (read/write)
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Description of the sharing rule. Maximum length is 1000 characters.
DeveloperName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
GroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the source group. Records that are owned by users in the source group trigger the rule to give access.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Label of the sharing rule as it appears in the UI. Maximum length is 80 characters.

Field	Details
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the user or group that you are granting access to.

Usage

Use this object to manage the sharing rules for cases. General sharing and territory management-related sharing use this object.

SEE ALSO:

[UserMonthlyMetric](#)

[Metadata API Developer Guide: SharingRules](#)

UserPackageLicense

Represents a license for an installed managed package, assigned to a specific user. This object is available in API version 31.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()` `update()`

Fields

Field Name	Details
IsRevoked	Type boolean Properties Defaulted on create, Filter, Group, Sort, Update Description Reserved for internal use. This field is available in API version 58.0 and later.
LastCreatedByChangeId	Type reference Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description ID of the user access change record related to this managed package license assignment. This field is available only if user access policies are enabled. This field is available in API version 58.0 and later. This field is a relationship field. Relationship Name LastCreatedByChange Relationship Type Lookup Refers To UserAccessChange
LastDeletedByChangeId	Type reference Properties Create, Filter, Group, Sort Description ID of the user access change record related to this managed package license assignment being revoked. This field is available only if user access policies are enabled. This field is available in API version 58.0 and later. This field is a relationship field. Relationship Name LastCreatedByChange Relationship Type Lookup Refers To UserAccessChange
PackageLicenseId	Type reference Properties Create, Filter, Group, Sort Description The 18-character Globally Unique ID (GUID) that identifies the package license This is a relationship field. Relationship Name PackageLicense Relationship Type Lookup Refers To PackageLicense

Field Name	Details
UserId	Type reference Properties Create, Filter, Group, Sort Description The User ID of the user licensed to use this package

Usage

Use this object, in conjunction with PackageLicense, to provide users access to a managed package installed in your organization.

UserPermissionAccess

Represents the permissions accessibility for a current user. Available in API version 41.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Fields

Field	Details
LastCacheUpdate	Type dateTime Properties Filter, Nillable, Sort Description The last modified date and time of either the user info or org info, whichever is later.
Permissions<PermissionName>	Type boolean Properties Filter Description The name of the permission, such as <code>PermissionsActivateContract</code> or <code>PermissionsAuthorApex</code> and whether it's available to the user (<code>true</code>) or not (<code>false</code>).

Usage

API users without `PermissionsViewSetUp` can use this object to check if their own sessions have access to a feature.

SEE ALSO:

- [Profile](#)
- [PermissionSet](#)

UserPrioritizedRecord

Represents records that Pipeline Inspection, Account Intelligence, Contact Intelligence, and Lead Intelligence users flag as important for tracking in pipeline and intelligence views and filters. This object is available in API version 53.0 and later.

Supported Calls

```
create(), delete(), describeObjects(), getDeleted(), getUpdated(), query(), retrieve(),
update(), upsert()
```

Special Access Rules

To use `UserPrioritizedRecord` in Pipeline Inspection and the Account Intelligence, Contact Intelligence, and Lead Intelligence views, enable the Pipeline Inspection user permission and the Pipeline Inspection setting.

Fields

Field	Details
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the user who marked this record as important. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
TargetId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort Description The ID of the target object that is marked as important. Supported objects include: - Account - Contact - Lead - Opportunity This field is a polymorphic relationship field. Relationship Name Target Relationship Type Lookup Refers To - Account - Contact - Lead - Opportunity
TargetKeyPrefix	Type string Properties Filter, Group, idLookup, Sort Description The key prefix of the target object that is marked as important.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[UserPrioritizedRecordOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[UserPrioritizedRecordShare](#) on page 67

Sharing is available for the object.

UserPreference

Represents a functional preference for a specific user in your organization.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Customer Portal users can't access this object.

Only users with the View All Data or Manage Users permission can access UserPreference records of other users but all users can access their own UserPreference record.



Note: This behavior does not affect other types of user access such as Create or Edit.

Fields

Field	Details
Preference	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The name of the user preference. Supported values are: • 57 (Event Reminder Default Lead Time) • 58 (Task Reminder Default Time) • 91 (Prevent Logs on Load) • 92 (Autocomplete Apex After Key Press) • 93 (Visualforce Viewstate Inspector) • 94 (Forecasting Displayed Type) • 96 (Editor Theme) • 97 (Editor Font Size) • 98 (Pinned Folders) • 99 (Enable Query Plan) • 100 (Enable New Open Dialog) • 101 (Email Transport Type) • 102 (Pinned Wave Folders) • 108 (Density) • 109 (Lightning Flow Builder) • 111 (Format with Tabs) • 112 (Format Tab Width) • 113 (Format Print Width) • 114 (Record Page Activities Display) • 118 (Lightning Flow Explorer)

Field	Details
	• 119 (For internal use only) • 120 (Simple Auth Option) • 122 (Sales Alert Notifications Snooze Time) • 131 (Color Scheme) Event Reminder Default Lead Time and Task Reminder Default Time are related to these fields on the User object: • UserPreferencesEventRemindersCheckboxDefault • UserPreferencesTaskRemindersCheckboxDefault • UserPreferencesSuppressEventSFXReminders • UserPreferencesSuppressTaskSFXReminders Enable New Open Dialog is reserved for future use. When creating SOQL queries, <code>tolabel</code> is required to return accurate results. For example, <code>select Id, tolabel(Preference), Value, UserId from UserPreference.</code> 108 (Density) is available in API v44.0 and later.
UserId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the user associated with this role. The corresponding field label is User ID. Admin users can create and edit preferences for other users. Standard users can delete their own preferences only. For a standard user, the value of the <code>UserId</code> field must be their own <code>UserId</code>.
Value	Type textarea Properties Create, Filter, Nillable, Sort, Update Description The value of the user preference. For <code>Event Reminder Default Lead Time</code>, the values are increasing intervals of time from 0 minutes to 2 days. For <code>Task Reminder Default Time</code>, the values are half-hours from 12:00 AM to 11:30 PM. To view the respective sets of values, access the Reminders in your personal settings in the online application.

Usage

Use this object to query the set of currently configured user preferences in your organization. In your client application, you can query the User object to obtain valid User IDs to access the UserPreference object.

All users can invoke the supported calls with this object. Standard users can invoke these calls, but only on their own preferences.

UserProfile

Represents a Chatter user profile.

 **Note:** This object has been deprecated as of API version 32.0. Use the [User](#) object to query information about a user in API version 32.0 and later.

Supported Calls

`describeLayout()`, `query()`, `retrieve()`

Special Access Rules

- Information in hidden fields in a user's profile isn't searchable by external users (with a portal profile) in an Experience Cloud site. For example, if a user in a site has a hidden email address and an external user searches for it, the user record isn't returned in the search results. Hidden field values also aren't returned when external users perform searches on nonhidden fields. So if an external user searches for a user's name (can't be hidden), any hidden field values associated with the user record such as a hidden email address aren't returned in the search results.

internal users belonging to the same Experience Cloud site can search for and view hidden field values in search results.
- Any fields that have been restricted in visibility will be returned empty, whether or not they are, and will not be removed from the field listing.

Fields

Field	Details
AboutMe	Type textarea Properties Filter, Nillable, Sort Description Information about the user, such as areas of interest or skills.
Address (beta)	Type address Properties Filter, Nillable

Field	Details
	Description The compound form of the address. Read-only. See Address Compound Fields for details on compound address fields.
City	Type string Properties Filter, Group, Nillable, Sort Description The city associated with the user profile.
CompanyName	Type string Properties Filter, Group, Nillable, Sort Description The company associated with the user profile.
Country	Type string Properties Filter, Group, Nillable, Sort Description The country associated with the user profile.
Email	Type email Properties Filter, Group, idLookup, Sort Description The email address associated with the user profile.
Fax	Type phone Properties Filter, Group, Nillable, Sort Description The fax number associated with the user profile.
FirstName	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The user's first name.
FullPhotoUrl	Type url Properties Filter, Nillable, Sort Description The URL for the user's profile photo if Chatter is enabled. The URL is updated every time a photo is uploaded and reflects the most recent photo. If a newer photo is uploaded, the URL returned for an older photo isn't guaranteed to return a photo. Query this field for the URL of the most recent photo.
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the user has access to log in (<code>true</code>) or not (<code>false</code>). You can modify a User's active status from the user interface or via the API.
IsBadged	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the user is visually badged (<code>true</code>) or not (<code>false</code>). Users of the same Chatter user type (internal, external) are badged. Different user types are not badged.
LastName	Type string Properties Filter, Group, Sort Description The user's last name.

Field	Details
Latitude (beta)	Type double Properties Filter, Nillable, Sort Description Used with <code>Longitude</code> to specify the precise geolocation of an address. Acceptable values are numbers between –90 and 90 up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations
Longitude (beta)	Type double Properties Filter, Nillable, Sort Description Used with <code>Longitude</code> to specify the precise geolocation of an address. Acceptable values are numbers between –90 and 90 up to 15 decimal places. For details on geolocation compound fields, see Compound Field Considerations and Limitations
ManagerId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the user who manages this user.
MobilePhone	Type phone Properties Filter, Group, Nillable, Sort Description The user's mobile or cellular phone number.
Name	Type string Properties Filter, Group, Sort Description Concatenation of <code>FirstName</code> and <code>LastName</code>.

Field	Details
Phone	Type phone Properties Filter, Group, Nillable, Sort Description The user's phone number.
PostalCode	Type string Properties Filter, Group, Nillable, Sort Description The user's postal or ZIP code. Label is Zip/Postal Code.
SmallPhotoUrl	Type url Properties Filter, Nillable, Sort Description The URL for a thumbnail of the user's profile photo if Chatter is enabled. The URL is updated every time a photo is uploaded and reflects the most recent photo. If a newer photo is uploaded, the URL returned for an older photo isn't guaranteed to return a photo. Query this field for the URL of the most recent photo.
State	Type string Properties Filter, Group, Nillable, Sort Description The state associated with the user profile.
Street	Type textarea Properties Filter, Group, Nillable, Sort Description The street address associated with the user profile.
Title	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The user's business title, such as "Vice President."
UserPreferencesActivityRemindersPopup	Type boolean Properties Filter Description When <code>true</code> , a reminder window automatically opens when an activity reminder is due. Corresponds to the <code>Trigger alert when reminder comes due</code> checkbox at the Reminders page in the personal settings in the user interface.
UserPreferencesApexPagesDeveloperMode	Type boolean Properties Filter Description When <code>true</code> , indicates that the user has enabled developer mode for editing Visualforce pages and controllers.
UserPreferencesDisableAllFeedsEmail	Type boolean Properties Filter Description When <code>false</code> , the user automatically receives email for all updates to Chatter feeds, based on the types of feed emails and digests the user has enabled.
UserPreferencesDisableBookmarkEmail	Type boolean Properties Filter Description When <code>false</code> , the user automatically receives email every time someone comments on a Chatter feed item after the user has bookmarked it.

Field	Details
UserPreferencesDisableChangeCommentEmail	Type boolean Properties Filter Description When <code>false</code>, the user automatically receives email every time someone comments on a change the user has made, such as an update to their profile.
UserPreferencesDisableEndorsementEmail	Type boolean Properties Filter Description When <code>false</code>, the member automatically receives email every time someone endorses them for a topic.
UserPreferencesDisableFeedbackEmail	Type boolean Properties Filter Description When <code>false</code>, the user automatically receives emails related to WDC feedback. This includes when someone requests or offers feedback, shares feedback with the user, or reminds the user to answer a feedback request.
UserPreferencesDisableFileShareNotificationsForApi	Type boolean Properties Filter Description When <code>false</code>, email notifications are sent from the person who shared the file to the users that the file is shared with.
UserPreferencesDisableFollowersEmail	Type boolean Properties Filter Description When <code>false</code>, the user automatically receives email every time someone starts following the user in Chatter.

Field	Details
UserPreferencesDisableLaterCommentEmail	Type boolean Properties Filter Description When <code>false</code>, the user automatically receives email every time someone comments on a feed item after the user has commented on the feed item.
UserPreferencesDisableLikeEmail	Type boolean Properties Filter Description When <code>false</code>, the user automatically receives email every time someone likes their post or comment.
UserPreferencesDisableMentionsPostEmail	Type boolean Properties Filter Description When <code>false</code>, the user automatically receives email every time they're mentioned in posts.
UserPreferencesDisableMessageEmail	Type boolean Properties Filter Description When <code>false</code>, the user automatically receives email for Chatter messages sent to the user.
UserPreferencesDisableProfilePostEmail	Type boolean Properties Filter Description When <code>false</code>, the user automatically receives email every time someone posts to the user's profile.

Field	Details
UserPreferencesDisableRewardEmail	Type boolean Properties Filter Description When <code>false</code>, the user automatically receives emails related to WDC rewards. This includes when someone gives a reward to the user.
UserPreferencesDisableSharePostEmail	Type boolean Properties Filter Description When <code>false</code>, the user automatically receives email every time their post is shared.
UserPreferencesDisableWorkEmail	Type boolean Properties Filter Description When <code>false</code>, the user receives emails related to WDC feedback, goals, and coaching. The user must also sign up for individual emails listed on the WDC email settings page. When <code>true</code>, the user will not receive any emails related to WDC feedback, goals, or coaching even if they are signed up for individual emails.
UserPreferencesDisCommentAfterLikeEmail	Type boolean Properties Filter Description When <code>false</code>, the user automatically receives email every time someone comments on a post that the user liked.
UserPreferencesDisMentionsCommentEmail	Type boolean Properties Filter

Field	Details
	Description When <code>false</code> , the user automatically receives email every time the user is mentioned in comments.
<code>UserPreferencesDisProfPostCommentEmail</code>	Type boolean Properties Filter Description When <code>false</code> , the user automatically receives email every time someone comments on posts on the user's profile.
<code>UserPreferencesEnableAutoSubForFeeds</code>	Type boolean Properties Filter Description When <code>true</code> , the user automatically subscribes to feeds for any objects that the user creates.
<code>UserPreferencesEventRemindersCheckboxDefault</code>	Type boolean Properties Filter Description When <code>true</code> , a reminder popup is automatically set on the user's events. Corresponds to the <code>By default, set reminder on Events to...</code> checkbox on the Reminders page in the user interface. This field is related to <code>UserPreference</code> and customizing activity reminders.
<code>UserPreferencesHideChatterOnboardingSplash</code>	Type boolean Properties Filter Description When <code>true</code> , the initial Chatter onboarding prompts do not appear.
<code>UserPreferencesHideCSNDesktopTask</code>	Type boolean Properties Filter

Field	Details
	Description When <code>true</code> , the Chatter recommendations panel never displays the recommendation to install Chatter Desktop.
UserPreferencesHideCSNGetChatterMobileTask	Type boolean Properties Filter Description When <code>true</code> , the Chatter recommendations panel never displays the recommendation to install Chatter Mobile.
UserPreferencesHideS1BrowserUI	Type boolean Properties Filter Description Controls the interface that the user sees when logging in to Salesforce from a supported mobile browser. If <code>false</code> , the user is automatically redirected to the Salesforce mobile web. If <code>true</code> , the user sees the full Salesforce site. The default value is <code>false</code> . Label is Salesforce User . This field is available in API version 29.0 or later.
UserPreferencesHideSecondChatterOnboardingSplash	Type boolean Properties Filter Description When <code>true</code> , the secondary Chatter onboarding prompts do not appear.
UserPreferencesReminderSoundOff	Type boolean Properties Filter Description When <code>true</code> , a sound automatically plays when an activity reminder is due. Corresponds to the <code>Play a reminder sound</code> checkbox on the Reminders page in the user interface.
UserPreferencesShowCityToExternalUsers	Type boolean

Field	Details
	Properties Filter Description Indicates the visibility of the city field in the user's contact information. City is visible only to internal members of the user's organization when: - This field is <code>false</code>. When <code>false</code>, this field returns the value <code>#N/A</code>. City is visible to external members in an Experience Cloud site when: - This field is <code>true</code>, or - This field is <code>false</code> but <code>UserPreferencesShowCityToGuestUsers</code> is <code>true</code>, which overrides this field's value. External users are users with Community, Customer Portal, or partner portal licenses. The default value is <code>false</code>. This field is available in API version 26.0 and later.
<code>UserPreferencesShowCityToGuestUsers</code>	Type boolean Properties Filter Description Indicates the visibility of the city field in the user's contact information. When <code>true</code>, city is visible to guest users. Guest users can access public Site.com and Salesforce sites, and public pages in Experience Cloud sites, via the Guest User license associated with each site. When <code>false</code>, this field returns the value <code>#N/A</code>. When <code>true</code>, this field overrides the value <code>false</code> in <code>UserPreferencesShowCityToExternalUsers</code>, making the user's city visible to external members. The default value is <code>false</code>. This field is available in API version 28.0 and later.
<code>UserPreferencesShowCountryToExternalUsers</code>	Type boolean Properties Filter Description Indicates the visibility of the country field in the user's contact information. Country is visible only to internal members of the user's organization when:

Field	Details
	- This field is <code>false</code>. When <code>false</code>, this field returns the value <code>#N/A</code>. Country is visible to external members in an Experience Cloud site when: - This field is <code>true</code>, or - This field is <code>false</code> but <code>UserPreferencesShowCountryToGuestUsers</code> is <code>true</code>, which overrides this field's value. External users are users with Community, Customer Portal, or partner portal licenses. The default value is <code>false</code>. This field is available in API version 26.0 and later.
<code>UserPreferencesShowCountryToGuestUsers</code>	Type boolean Properties Filter Description Indicates the visibility of the country field in the user's contact information. When <code>true</code>, country is visible to guest users. Guest users can access public Site.com and Salesforce sites, and public pages in Experience Cloud sites, via the Guest User license associated with each site. When <code>false</code>, this field returns the value <code>#N/A</code>. When <code>true</code>, this field overrides the value <code>false</code> in <code>UserPreferencesShowCountryToExternalUsers</code>, making the user's country visible to external members. The default value is <code>false</code>. This field is available in API version 28.0 and later.
<code>UserPreferencesShowEmailToExternalUsers</code>	Type boolean Properties Filter Description Indicates the visibility of the email address field in the user's contact information. Email address is visible only to internal members of the user's organization when this field is <code>false</code>. Email address is visible to external members in an Experience Cloud site when this field is <code>true</code>. External users are users with Community, Customer Portal, or partner portal licenses. When <code>false</code>, this field returns the value <code>#N/A</code>. The default value is <code>false</code>. This field is available in API version 26.0 and later.

Field	Details
UserPreferencesShowFaxToExternalUsers	Type boolean Properties Filter Description Indicates the visibility of the fax number field in the user's contact information. Fax number is visible only to internal members of the user's organization when this field is <code>false</code>. Fax number is visible to external members in an Experience Cloud site when this field is <code>true</code>. External users are users with Community, Customer Portal, or partner portal licenses. When <code>false</code>, this field returns the value <code>#N/A</code>. The default value is <code>false</code>. This field is available in API version 26.0 and later.
UserPreferencesShowManagerToExternalUsers	Type boolean Properties Filter Description Indicates the visibility of the manager field in the user's contact information. Manager is visible only to internal members of the user's organization when this field is <code>false</code>. Manager is visible to external members in an Experience Cloud site when this field is <code>true</code>. External users are users with Community, Customer Portal, or partner portal licenses. When <code>false</code>, this field returns the value <code>#N/A</code>. The default value is <code>false</code>. This field is available in API version 26.0 and later.
UserPreferencesShowMobilePhoneToExternalUsers	Type boolean Properties Filter Description Indicates the visibility of the mobile device number field in the user's contact information. The number is visible only to internal members of the user's organization when this field is <code>false</code>. The number is visible to external members in an Experience Cloud site when this field is <code>true</code>. External users are users with Community, Customer Portal, or partner portal licenses. When <code>false</code>, this field returns the value <code>#N/A</code>. The default value is <code>false</code>. This field is available in API version 26.0 and later.

Field	Details
UserPreferencesShowPostalCodeToExternalUsers	Type boolean Properties Filter Description Indicates the visibility of the postal or ZIP code field in the user's contact information. Postal code is visible only to internal members of the user's organization when: • This field is <code>false</code>. When <code>false</code>, this field returns the value <code>#N/A</code>. Postal code is visible to external members in an Experience Cloud site when: • This field is <code>true</code>, or • This field is <code>false</code> but <code>UserPreferencesShowPostalCodeToGuestUsers</code> is <code>true</code>, which overrides this field's value. External users are users with Community, Customer Portal, or partner portal licenses. The default value is <code>false</code>. This field is available in API version 26.0 and later.
UserPreferencesShowPostalCodeToGuestUsers	Type boolean Properties Filter Description Indicates the visibility of the postal or ZIP code field in the user's contact information. When <code>true</code>, postal code is visible to guest users. Guest users can access public Site.com and Salesforce sites, and public pages in Experience Cloud sites, via the Guest User license associated with each site. When <code>false</code>, this field returns the value <code>#N/A</code>. When <code>true</code>, this field overrides the value <code>false</code> in <code>UserPreferencesShowPostalCodeToExternalUsers</code>, making the user's postal code visible to external members. The default value is <code>false</code>. This field is available in API version 28.0 and later.
UserPreferencesShowProfilePicToGuestUsers	Type boolean Properties Filter

Field	Details
	Description Indicates the visibility of the user's profile photo. When <code>true</code>, the photo is visible to guest users in an Experience Cloud site. Guest users can access public Site.com and Salesforce sites, and public pages in Experience Cloud sites, via the Guest User license associated with each site. When <code>false</code>, this field returns the stock photo. The default value is <code>false</code>. This field is available in API version 28.0 and later.
UserPreferencesShowStateToExternalUsers	Type boolean Properties Filter Description Indicates the visibility of the state field in the user's contact information. State is visible only to internal members of the user's organization when: • This field is <code>false</code>. When <code>false</code>, this field returns the value <code>#N/A</code>. State is visible to external members in an Experience Cloud site when: • This field is <code>true</code>, or • This field is <code>false</code> but <code>UserPreferencesShowStateToGuestUsers</code> is <code>true</code>, which overrides this field's value. External users are users with Community, Customer Portal, or partner portal licenses. When <code>false</code>, this field returns the value <code>#N/A</code>. The default value is <code>false</code>. This field is available in API version 26.0 and later.
UserPreferencesShowStateToGuestUsers	Type boolean Properties Filter Description Indicates the visibility of the state field in the user's contact information. When <code>true</code>, state is visible to guest users. Guest users can access public Site.com and Salesforce sites, and public pages in Experience Cloud sites, via the Guest User license associated with each site. When <code>false</code>, this field returns the value <code>#N/A</code>. When <code>true</code>, this field overrides the value <code>false</code> in <code>UserPreferencesShowStateToExternalUsers</code>, making the user's state visible to external members.

Field	Details
	The default value is <code>false</code>. This field is available in API version 28.0 and later.
<code>UserPreferencesShowStreetAddressToExternalUsers</code>	Type boolean Properties Filter Description Indicates the visibility of the street address field in the user's contact information. The address is visible only to internal members of the user's organization when this field is <code>false</code>. The address is visible to external members in an Experience Cloud site when this field is <code>true</code>. External users are users with Community, Customer Portal, or partner portal licenses. When <code>false</code>, this field returns the value <code>#N/A</code>. The default value is <code>false</code>. This field is available in API version 26.0 and later.
<code>UserPreferencesShowTitleToExternalUsers</code>	Type boolean Properties Filter Description Indicates the visibility of the business title field in the user's contact information. Title is visible only to internal members of the user's organization when: • This field is <code>false</code>. When <code>false</code>, this field returns the value <code>#N/A</code>. Title is visible to external members in an Experience Cloud site when: • This field is <code>true</code>, or • This field is <code>false</code> but <code>UserPreferencesShowTitleToGuestUsers</code> is <code>true</code>, which overrides this field's value. External users are users with Community, Customer Portal, or partner portal licenses. The default value is <code>true</code>. This field is available in API version 26.0 and later.
<code>UserPreferencesShowTitleToGuestUsers</code>	Type boolean Properties Filter

Field	Details
	Description Indicates the visibility of the business title field in the user’s contact information. When <code>true</code>, title is visible to guest users. Guest users can access public Site.com and Salesforce sites, and public pages in Experience Cloud sites, via the Guest User license associated with each site. When <code>false</code>, this field returns the value <code>#N/A</code>. When <code>true</code>, this field overrides the value <code>false</code> in <code>UserPreferencesShowTitleToExternalUsers</code>, making the user’s title visible to external members. The default value is <code>false</code>. This field is available in API version 28.0 and later.
UserPreferencesShowWorkPhoneToExternalUsers	Type boolean Properties Filter Description Indicates the visibility of the work phone number field in the user’s contact information. The number is visible only to internal members of the user’s organization when this field is <code>false</code>. The number is visible to external members in an Experience Cloud site when this field is <code>true</code>. External users are users with Community, Customer Portal, or partner portal licenses. When <code>false</code>, this field returns the value <code>#N/A</code>. The default value is <code>false</code>. This field is available in API version 26.0 and later.
UserPreferencesTaskRemindersCheckboxDefault	Type boolean Properties Filter Description When <code>true</code>, a reminder popup is automatically set on the user’s tasks. Corresponds to the <code>By default, set reminder on Tasks to...</code> checkbox on the Reminders page in the user interface. This field is related to UserPreference and customizing activity reminders.

Usage

Use this object to query Chatter—related information about the user. While the User object contains all the information about a user and is historically tied to user management, UserProfile is a read-only entity that contains the information that is relevant in a Chatter context.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

UserProfileFeed (API version 18.0–26.0)

Feed tracking is available for the object.

UserProvAccount

Represents information that links a Salesforce user account with an account in a third-party (target) system, such as Google, for users of connected apps with Salesforce user provisioning enabled. This object is available in API version 33.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ConnectedAppId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The 15 character application ID. This is a relationship field. Relationship Name ConnectedApp Relationship Type Lookup Refers To ConnectedApplication
DeletedDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time when the associated user account in the target system was deleted. This value is automatically updated during the provisioning and reconciling processes.

Field	Details
ExternalEmail	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The email address as stored in the target system for the associated user account.
ExternalFirstName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The first name as stored in the target system for the associated user account.
ExternalLastName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The last name as stored in the target system for the associated user account.
ExternalUserId	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The unique identifier for the user as stored in the target system.
ExternalUsername	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The username as stored in the target system for the associated user account.
IsKnownLink	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Setting the <code>IsKnownLink</code> value to <code>true</code> implies the administrator or another user is managing the relationship between the Salesforce user account and the third-party user account, manually. This field helps Salesforce coordinate updates between the <code>UserProvAccountStaging</code> object and the <code>UserProvAccount</code> object while committing staged accounts. Typically, for a matching user account (the same <code>ExternalUserId</code> for both objects), Salesforce copies the values from the <code>UserProvAccountStaging</code> object to the <code>UserProvAccount</code> object. However, if Salesforce encounters a <code>UserProvAccountStaging</code> object with a matching <code>ExternalUserId</code> but different <code>LinkState</code> and <code>SalesforceUserId</code> values during this process, Salesforce checks the <code>UserProvAccount</code> <code>IsKnownLink</code> value. If the <code>IsKnownLink</code> value is <code>true</code>, Salesforce doesn't copy the <code>LinkState</code> and <code>SalesforceUserId</code> values from the <code>UserProvAccountStaging</code> object to the <code>UserProvAccount</code> object (all other values are copied). The default is <code>false</code>, meaning Salesforce manages the account relationship.
LinkState	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The state of the current connection between the user account in the Salesforce organization and the associated user account in the target system. The valid values are: • <code>linked</code>— changes to the account in the Salesforce organization are queued to be updated for the associated user account in the target system. • <code>duplicate</code>— an associated account in the target system exists. • <code>orphaned</code>—no associated account exists in the target system. • <code>ignored</code>— changes to the account in the Salesforce organization have no effect on the associated user account in the target system.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The unique name for this object.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Namepointing, Sort, Update

Field	Details
	Description The user ID of the owner of this object—typically a Salesforce administrator.
SalesforceUserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The user ID for the user account in the Salesforce organization that is associated with the user account in the target system. This is a relationship field. Relationship Name SalesforceUser Relationship Type Lookup Refers To User
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The status of the account in the target system. The valid values are: • Active • Deactivated • Deleted

UserProvAccountStaging

Temporarily stores user account information while a user completes the User Provisioning Wizard. This information that is stored in the UserProvAccount object when you click the button to collect and analyze accounts on the target system.

User provisioning links a Salesforce user account with an account in a third-party (target) system. To configure user provisioning, you use a User Provisioning Wizard that guides you through the setup process. As you enter values about account details in the wizard, these values are stored in this object until you click the button to collect and analyze accounts on the target system. The general user provisioning configuration details are stored in the UserProvisioningConfig object.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
ConnectedAppId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The 15 character connected app ID. This is a relationship field. Relationship Name ConnectedApp Relationship Type Lookup Refers To ConnectedApplication
ExternalEmail	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The email address as stored in the target system for the associated user account.
ExternalFirstName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The first name as stored in the target system for the associated user account.
ExternalLastName	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The last name as stored in the target system for the associated user account.
ExternalUserId	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The unique identifier for the user as stored in the target system.
ExternalUsername	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The username as stored in the target system for the associated user account.
LinkState	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The state of the current connection between the user account in the Salesforce organization and the associated user account in the target system. The valid values are: • <code>linked</code>— a user account matches one in the target system. • <code>duplicate</code>— an associated account in the target system exists. • <code>orphaned</code>—no associated account exists in the target system. • <code>ignored</code>— changes to the account in the Salesforce organization have no effect on the associated user account in the target system.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The unique name for this object.
OwnerId	Type reference

Field Name	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The user ID of the owner of this object—typically a Salesforce administrator.
SalesforceUserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The user ID for the user account in the Salesforce organization that is associated with the user account in the target system. This is a relationship field. Relationship Name SalesforceUser Relationship Type Lookup Refers To User
Status	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The status of the account in the target system. The valid values are: • Active • Deactivated • Deleted

Usage

When committing fields from a `UserProvAccountStaging` to a `UserProvAccount` object, Salesforce looks up the `UserProvAccount` record where `UserProvAccountStaging.ExternalUserId = UserProvAccount.ExternalUserId`.

- If an `ExternalUserId` doesn't match an existing account, Salesforce creates a `UserProvAccount` record based on the `UserProvAccountStaging` record.
- If an `ExternalUserId` matches, then Salesforce checks the `UserProvAccount.isKnownLink` value, and does the following.
 - If `UserProvAccount.IsKnownLink = true`, Salesforce copies the `UserProvAccountStaging` values to the `UserProvAccount` object, except for the `ExternalUserId` and `LinkState` values.

- If `UserProvAccount.IsKnownLink = false`, Salesforce copies all of the `UserProvAccountStaging` values to the `UserProvAccount` object.

UserProvMockTarget

Represents an entity for testing user data before committing the data to a third-party system for user provisioning.

During the user provisioning process, user account information is sent to a third-party system to create, update or delete a user account on that system. While configuring user provisioning for your organization using a flow or Apex action, you can use this object to confirm the associated flow or Apex code is sending the desired data. After confirming the correct fields and values, you can update the flow or Apex action to send the data to the target system.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
<code>ExternalEmail</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The email address as stored in the target system for the associated user account.
<code>ExternalFirstName</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The first name as stored in the target system for the associated user account.
<code>ExternalLastName</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The last name as stored in the target system for the associated user account.

Field Name	Details
ExternalUserId	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The unique identifier for the user as stored in the target system.
ExternalUsername	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The username as stored in the target system for the associated user account.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The unique name for this object.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The user ID of the owner of this object—typically a Salesforce administrator.

UserProvisioningConfig

Represents information for a flow to use during a user provisioning request process, such as the attributes for an update. This object is available in API version 34.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. Because changing terms in our code can break current implementations, we maintained this object's name.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
ApprovalRequired	Type textarea Properties Create, Nillable, Update Description Denotes whether approvals are required for provisioning users for the associated connected app. If the value is null, no approval is required.
ConnectedAppId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The 18-digit application ID for the connected app. This is a relationship field. Relationship Name ConnectedApp Relationship Type Lookup Refers To ConnectedApplication
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package, and the changes are reflected in a subscriber's organization.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Enabled	Type boolean

Field Name	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether user provisioning is enabled for the associated connected app (<code>true</code>) or not (<code>false</code>).
EnabledOperations	Type textarea Properties Create, Nillable, Update Description Lists the operations, as comma-separated values, that create a UserProvisioningRequest object for the associated connected app. Allowed values are: • Create • Update • EnableAndDisable (activation and deactivation) • SuspendAndRestore (freeze and unfreeze)
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The two- to five-character code that represents the language and locale ISO. This code controls the language for labels displayed in an application.
LastReconDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time when user accounts were last reconciled between Salesforce and the target system.
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update

Field Name	Details
	Description The primary label for this object. This value is the internal label that doesn't get translated.
NamedCredentialId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Salesforce ID of the named credential that's used for a request. The named credential identifies the third-party system and the third-party authentication settings. This is a relationship field. Relationship Name NamedCredential Relationship Type Lookup Refers To NamedCredential
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, NamespacePrefix is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, NamespacePrefix is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
Notes	Type textarea

Field Name	Details
	Properties Create, Nillable, Update Description A utility field for administrators to add any additional information about the configuration. This field is for internal reference only, and is not used by any process.
OnUpdateAttributes	Type textarea Properties Create, Nillable, Update Description Lists the user attributes, as comma-separated values, that generate a UserProvisioningRequest object during an update.
ReconFilter	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description When collecting and analyzing users on a third-party system, the plug-in uses this filter to limit the scope of the collection.
UserAccountMapping	Type textarea Properties Create, Nillable, Update Description Stores the attributes used to link the Salesforce user to the account on the third-party system, in JSON format. For example: <pre>{ "linkingSalesforceUserAttribute": "Username", "linkingTargetUserAttribute": "Email" }</pre>

UserProvisioningLog

Represents messages generated during the process of provisioning users for third-party applications. This object is available in API version 33.0 and later.

Some messages for this object are generated automatically by Salesforce, and others are created by the developers of the user provisioning plugin. Developers can use this object to log messages from the flow associated with the user provisioning process or the Apex plugin that calls the target system. Administrators can use this object as a log of all user provisioning activity and as a troubleshooting tool if desired behavior is missing. This object is available as a custom report type.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Details	Type textarea Properties Create, Nillable, Update Description The value of this field depends on the log entry. For example, if the target system returns an error, the error message may be recorded in this field.
ExternalUserId	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The unique identifier for the user in the target system.
ExternalUsername	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The username set in the target system for the associated user account.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The unique name for this object.
OwnerId	Type reference

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Salesforce ID of the Group or User who owns this object.
Status	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The status of the user provisioning request. Based on the context of the log, it can contain different values, such as an HttpStatusCode.
UserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Salesforce ID of the user making the request. This is a relationship field. Relationship Name User Relationship Type Lookup Refers To User
UserProvisioningRequestId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description A unique identifier for the user provisioning request. This is a relationship field. Relationship Name UserProvisioningRequest Relationship Type Lookup Refers To UserProvisioningRequest

UserProvisioningRequest

Represents an individual provisioning request to create, update, or delete a single user account in a third-party service system (or another Salesforce organization). This object is available in API version 33.0 and later.

A UserProvisioningRequest (UPR) record is created for each provisioning action for each user, and for each connected app available to the user. For example, if a user has two connected apps, and a provisioning request is sent to two different services to create an account for the user, Salesforce creates two UPR objects. Provisioning actions include creating, updating, or deleting a user account.

Supported Calls

`create()`, `delete()`,
`describeLayout()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AppName	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The unique name of the connected app associated with the service provider.
ApprovalStatus	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The status of the approval for the current request. If the user provisioning setup for the connected app does not have an approval process enabled, the status is <code>Not Required</code> . If an approval process is enabled, supported values are: • <code>Required</code>— An approval process is enabled in the user provisioning setup for the associated connected app, but there is no response to the request yet. • <code>Not Required</code>— An approval process is not enabled in the user provisioning setup for the associated connected app. • <code>Approved</code> • <code>Denied</code>
ConnectedAppId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The 18-digit application ID for the connected app. This is a relationship field. Relationship Name ConnectedApp Relationship Type Lookup Refers To ConnectedApplication
ExternalUserId	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The unique identifier for the user in the target system.
ManagerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Salesforce ID of the user who manages the user specified in the <code>SalesforceUserId</code> field. If an approval process is configured for the user provisioning request, this value allows the manager to approve the request. Available in API version 34.0 and later. This is a relationship field. Relationship Name Manager Relationship Type Lookup Refers To User
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The unique name for this object.

Field	Details
Operation	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The Apex method called by the trigger associated with the provisioning request (typically a change to the User object). Supported values are: • Create • Read • Update • Deactivate • Activate • Freeze • Unfreeze • Reconcile • Linking For example, when the User object field <code>isActive</code> is set to <code>false</code>, the UPR object <code>Operation</code> field value is set to <code>Deactivate</code>.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Salesforce ID of the Group or User who owns this object. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ParentID	Type reference Properties Create, Filter, Group, Sort, Update Description When a retry event is created, the failed UPR is cloned and resubmitted. This field contains a lookup to the failed UPR that was cloned to create the current record.

Field	Details
	This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To UserProvisioningRequest
Retry Count	Type int Properties Create, Filter, Group, Sort, Update Description Number of retry attempts performed on a UPR. Retry Count enables custom business logic such as "Retry 5 times then stop and notify your admin."
SalesforceUserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Salesforce ID of the user making the request. This is a relationship field. Relationship Name SalesforceUser Relationship Type Lookup Refers To User
ScheduleDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description When to send this request to the service provider.  Note: Scheduling is not implemented yet. Currently, provisioning changes are queued immediately to be sent to the service provider.
State	Type picklist

Field	Details
	Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Status of this request. Supported values are: • New • Requested • Completed • Failed • Collecting • Collected • Analyzing • Analyzed • Committing • Retried • Manually Completed The State goes from New to Requested to Completed or Failed, unless a reconciliation process is occurring. For details about the reconciliation process State value changes, see Usage. The State goes from Failed to Retried or Manually Completed when troubleshooting UPR failures. For details about handling failures, see State Values for Managing Provisioning Failures.
UserProvAccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID value of the associated UserProvAccount object. This is a relationship field. Relationship Name UserProvAccount Relationship Type Lookup Refers To UserProvAccount
UserProvConfigId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The ID value of the associated UserProvisioningConfig object. Available in API version 34.0 and later. This is a relationship field.
	Relationship Name UserProvConfig
	Relationship Type Lookup
	Refers To UserProvisioningConfig

Usage

The `State` value changes during a reconciliation process (`Operation = Reconcile`) to gather and compare users on the third-party system to Salesforce users. Typically, when a UPR entry is first created, it has a `State` value of `New`. When a collection process is triggered, the `State` transitions to `Collecting` until that process is finished and the `State` is `Collected`. When an analyze process is triggered, the `State` transitions to `Analyzing` until that process is finished and the `State` is `Analyzed`. If a process commits the request, the `State` then transitions to `Committing`, and the properties move from the `UserProvAccountStaging` object to the `UserProvAccount` object. When those properties are saved in the `UserProvAccount` object, the `State` transitions to `Completed`.

However, the `State` does not necessarily start at `New`. For example, `UserProvAccountStaging` entries can be inserted programmatically. If a process is initiated that triggers linking these rows to accounts on the third-party service, a UPR entry could start with the `Analyzing` `State`.

Also, the `State` cannot go backwards from an active task. For example, a successful `Analyzing` `State` must progress to `Analyzed`; unless the active process fails, and then the `State` must change to `Failed`. Certain `State` transitions cannot be made programmatically and must be triggered by Salesforce.

The following table shows the `State` transitions that can occur for each `State` value. Each row corresponds to a current `State` value and each column corresponds to a new `State` after a potential transition.

- ✖ — the transition to this value is not allowed.
- ✔ — the transition to this value is allowed.
- ☁ — only Salesforce can transition the `State` to this value.

	New	Requested	Collecting	Collected	Analyzing	Analyzed	Committing	Completed	Failed	Retried	Manually Completed
New	✔	☁	✔	✔	✔	✔	✔	✔	✔	✖	✖
Requested	✖	✔	☁	☁	☁	☁	☁	☁	☁	✖	✖
Collecting	✖	✖	✔	☁	☁	☁	☁	☁	☁	✖	✖
Collected	✖	✖	✖	✔	✔	✔	✔	✔	✔	✖	✖
Analyzing	✖	✖	✖	☁	✔	☁	☁	☁	☁	✖	✖

	New	Requested	Collecting	Collected	Analyzing	Analyzed	Committing	Completed	Failed	Retried	Manually Completed
Analyzed	✗	✗	✗	✗	✗	✓	✓	✓	✓	✗	✗
Committing	✗	✗	✗	✗	✗		✓			✗	✗
Completed	✗	✗	✗	✗	✗	✗	✗	✓	✗	✗	✗
Failed	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓	✓
Retried	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗
Manually Completed	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗

State Values for Managing Provisioning Failures

The `state` value changes to `Failed` for several reasons, such as network outages, session timeouts, permissions issues, and record locks. The `Failed` state can transition to either `Retried` or `Manually Completed` to indicate what action was taken to address the failure. Actions can include correcting the root cause of the failure and requesting that the provisioning engine retry the UPR. Or, it can be completing the action against the target manually. Each UPR is an independent transaction and it's possible the retry causes a failure with a different root cause. So it's hard to distinguish failed events that you addressed from the ones that require more action.

If you tried to correct the cause of the failure and requested the provisioning engine to retry the UPR, you can mark the failed UPR `Retried`. Or, if the action against the target was completed manually, you can mark it `Manually Completed`.

When a retry event is created, the failed UPR is cloned, and resubmitted. The `ParentID` field contains a lookup to the failed UPR to use to clone the new UPR. The `Retry Count` field contains the number of retry attempts that were performed on a UPR. With the `Retry Count` field, you can add custom business logic like "Retry 5 times then stop and notify your admin."

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[UserProvisioningRequestOwnerSharingRule](#) (API version 34.0)

Sharing rules are available for the object.

[UserProvisioningRequestShare](#) (API version 34.0)

Sharing is available for the object.

UserRecordAccess

Represents a user's access to a set of records. This object is read only and is available in API version 24.0 and later. This object doesn't consider whether a user's access is blocked by a restriction rule.

Supported Calls

`describeObjects()`, `query()`

Fields

Field	Details
HasAllAccess	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a user can share the record.
HasDeleteAccess	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a user has delete access to the record (<code>true</code>) or not (<code>false</code>).
HasEditAccess	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a user has edit access to the record (<code>true</code>) or not (<code>false</code>).
HasTransferAccess	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a user has transfer access to the record (<code>true</code>) or not (<code>false</code>).
HasReadAccess	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a user has read access to the record (<code>true</code>) or not (<code>false</code>).
MaxAccessLevel	Type picklist Properties Group, Nillable, Restricted picklist, Sort

Field	Details
	Description Indicates a user's maximum level of access to a record. Valid values are: • None • Read • Edit • Delete • Transfer • All
RecordId	Type picklist Properties Filter, Group, Restricted picklist, Sort Description ID of the record.
UserId	Type reference Properties Filter, Group Description ID of the user.

Usage

Use this object to query a user's access to records. You can only query records of objects listed on the Sharing Settings Setup page. You can't create, delete, or update any records using this object.



Note: UserRecordAccess doesn't consider whether a user's access is blocked due to a [restriction rule](#). If a user's access is blocked even though query results state that they should have access, check to see if a restriction rule on the object prevents the user's access.

Up to 200 record IDs can be queried. You can include an `ORDER BY` clause for any field that is being selected in the query.

The following sample query returns the records, whether the queried user has read and transfer access to each record, and the user's maximum access level to each record.

```
SELECT RecordId, HasReadAccess, HasTransferAccess, MaxAccessLevel
FROM UserRecordAccess
WHERE UserId = [single ID]
AND RecordId = [single ID]           //or Record IN [list of IDs]
```

The following query returns the records to which a queried user has read access.

```
SELECT RecordId
  FROM UserRecordAccess
 WHERE UserId = [single ID]
 AND RecordId = [single ID]      //or Record IN [list of IDs]
 AND HasReadAccess = true
```

Using API version 30.0 and later, UserRecordAccess is a foreign key on the records. You can't filter by or provide the `UserId` or `RecordId` fields when using this object as a lookup or foreign key. The previous sample queries can be run as:

```
SELECT Id, Name, UserRecordAccess.HasReadAccess, UserRecordAccess.HasTransferAccess,
       UserRecordAccess.MaxAccessLevel
  FROM Account
```

```
SELECT Id, Name, UserRecordAccess.HasReadAccess
  FROM Account
```

SOQL restrictions:

- When the running user is querying a user's access to a set of records, records that the running user doesn't have read access to are filtered out of the results.
- When filtering by `UserId` and `RecordId` only, you must use `SELECT RecordId` and optionally one or more of the access level fields: `HasReadAccess`, `HasEditAccess`, `HasDeleteAccess`, `HasTransferAccess`, and `HasAllAccess`. You can include `MaxAccessLevel`.
- When filtering by `UserId`, `RecordId`, and an access level field, you must use `SELECT RecordId` only.

SEE ALSO:

[Developer Guide: Restriction Rules](#)

UserRelatedRecordContent

Represents the link between a managed content record, an account, event, or opportunity record, and a user record. This object is reserved for future use.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
ContentOwnerId	Type reference
	Properties Create, Filter, Group, Sort

Field	Details
	Description The user who owns the managed content record associated with the given account, event, or opportunity record. This field is a relationship field. Relationship Name ContentOwner Refers To User
ManagedContentId	Type reference Properties Create, Filter, Group, Sort Description The ID of the managed content record created for the associated Salesforce record. One unique managed content record is created per account, event, or opportunity record per user. This field is a relationship field. Relationship Name ManagedContent Refers To ManagedContent
RelatedRecordId	Type reference Properties Create, Filter, Group, Sort Description The ID of the Salesforce record (e.g., account, opportunity, or event) associated with the managed content record. This field is a polymorphic relationship field. Relationship Name RelatedRecord Refers To Account, Event, Opportunity

UserRole

Represents a user role in your organization.

 **Note:** This object was called “Role” in previous versions of the API documentation.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, only users with the View Roles and Role Hierarchy permission can access this object, and only users with the Manage Roles permission can edit this object.

Fields

Field	Details
<code>CaseAccessForAccountOwner</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The case access level for the account owner.
<code>ContactAccessForAccountOwner</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The contact access level for the account owner.  Note: When <code>DefaultContactAccess</code> is set to <code>Controlled by Parent</code>, you can't create or update this field.
<code>DeveloperName</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the

Field	Details
	changes are reflected in a subscriber's organization. Corresponds to Role Name in the user interface. This field is available in API version 24.0 and later. When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
ForecastUserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the forecast manager associated with this role. Label is User ID.
IsPartner	Type boolean Properties Defaulted on create, Filter Description Indicates whether the user role is a partner who has access to the partner portal (<code>true</code>) or not (<code>false</code>). This field is not available for release 9.0 and later. Instead, use <code>PortalType</code> with the value <code>Partner</code>.
MayForecastManagerShare	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the forecast manager can manually share their own forecast.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Name of the role. Corresponds to Label on the user interface.
OpportunityAccessForAccountOwner	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description Required. The opportunity access level for the account owner. Note that you can't set a user role with an opportunity access less than that specified in organization-wide defaults.
ParentRoleId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the parent role.
PortalAccountId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the role's associated portal account. This field is read-only.
PortalAccountOwnerId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the role's associated portal account's owner. This field is read-only.
PortalRole	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The portal role: Executive, Manager, User, or PersonAccount.
PortalType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description This value indicates the type of portal for the role: - None: Salesforce application role. - CustomerPortal: Customer portal role.

Field	Details
	Partner: partner portal role. The field <code>IsPartner</code> used in release 8.0 will map to this value. This field replaces <code>IsPartner</code> beginning with release 9.0.
RollupDescription	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the forecast rollup. Label is Description.

Usage

Use this object to query the set of currently configured user roles in your organization. Use it in your client application to obtain valid UserRole IDs to use when querying or modifying a User record.

Users with the View Roles and Role Hierarchy permission can query or describe this object. If your client application logs in with the “Manage Users” permission, it can query, create, update, or delete UserRole records.

 **Note:** You can’t update any field for a portal role.

For example, the following code finds all roles that are not assigned to any users.

```
SELECT Id, Name, DeveloperName
FROM UserRole
WHERE Id NOT IN (SELECT UserRoleId
                  FROM User
                  WHERE UserRoleId != '0000000000000000')
```

SEE ALSO:

[Overview of Salesforce Objects and Fields](#)

UserServicePresence

Represents a presence user’s real-time presence status. This object is available in API version 32.0 and later.

Supported Calls

`delete()`, `query()`, `getDeleted()`, `getUpdated()`, `retrieve()`, `undelete()`

Special Access Rules

To access this object, [Omni-Channel](#) must be enabled.

Fields

Field	Details
AtCapacityDuration	Type int Properties Filter, Group, Nillable, Sort Description The duration that the user is at full capacity. This field is updated when the agent's capacity changes, such as when the agent is assigned, declines, or closes a work item. Available in API versions 34.0 and later.
AverageCapacity	Type double Properties Filter, Nillable, Sort Description The user's average capacity. This field is updated when the agent's capacity changes, such as when the agent is assigned, declines, or closes a work item. Available in API versions 34.0 and later.
ConfiguredCapacity	Type int Properties Filter, Group, Nillable, Sort Description The user's total configured primary capacity.
ConfiguredInterruptCapacity	Type int Properties Filter, Group, Nillable, Sort Description The user's total configured interruptible capacity. Available in version 57.0 and later when the Interruptible Capacity feature is enabled.
IdleDuration	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description The duration that the user is idle. This field is updated when the agent's capacity changes, such as when the agent is assigned, declines, or closes a work item. Available in API versions 34.0 and later.
IsAway	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the user's status is <code>Away</code>. The default value is <code>false</code>.
IsCurrentState	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether a presence status is the user's current state. If <code>true</code>, the agent is in that presence status. Available in API versions 34.0 and later. The default value is <code>false</code>.
Name	Type string Properties Create, Filter, Nillable, Sort, Update Description An automatically generated ID number that identifies the record.
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the owner of the <code>UserServicePresence</code> entity. For external routing, allows the entity to be used in the Streaming API to listen to events whenever a <code>UserServicePresence</code> record is created, modified, or deleted.
ServicePresenceStatusId	Type reference Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description The ID of the presence status that's associated with the presence user that's specified by the <code>UserId</code> .
<code>StatusDuration</code>	Type int Properties Filter, Group, Nillable, Sort Description The duration of the user service presence status. This field is set only when the current user service presence status ends, such as when the agent changes to another presence status or logs out. Available in API versions 34.0 and later. This field is a calculated field: <code>StatusEndDate - StatusStartDate</code> .
<code>StatusEndDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The end date of the user service presence status. This field is set only when the current user service presence status ends, such as when the agent changes to another presence status or logs out. Available in API versions 34.0 and later.
<code>StatusStartDate</code>	Type dateTime Properties Filter, Nillable, Sort Description The start date of the user service presence status. Available in API versions 34.0 and later.
<code>UserId</code>	Type string Properties Create, Filter, Group, Sort, Update Description The ID of the Omni-Channel user.

Usage

Apex triggers aren't supported with `UserServicePresence`.

In API version 41.0 or later, `UserServicePresence` records can be deleted programmatically. The Customize Application permission is required.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

UserServicePresenceChangeEvent (API version 62.0)

Change events are available for the object.

UserServicePresenceOwnerSharingRule

Sharing rules are available for the object.

UserServicePresenceShare

Sharing is available for the object.

UserSetupEntityAccess

Represents the enabled custom permissions of the running user. This object is available in API version 48.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Fields

Field	Details
DeveloperName	Type string Properties Filter, Group, Nillable, Sort Description The unique name of the custom permission in the API. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object’s name in a managed package and the changes are reflected in a subscriber’s organization.
DurableId	Type string Properties Filter, Group, Nillable, Sort Description This field isn’t used.

Field	Details
KeyPrefix	Type string Properties Filter, Group, Nillable, Sort Description The first 3 characters of the <code>SetupEntityId</code>.
LastCacheUpdate	Type dateTime Properties Filter, Nillable, Sort Description The last modified date and time of the running user's info.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that's associated with the custom permission. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
SetupEntityId	Type string Properties Filter, Group, Nillable, Sort Description The ID of the custom permission assigned to the user.

Usage

API users without the View Setup and Configuration permission can use this object to check their assigned custom permissions.

UserShare

Represents a sharing entry on a user record. This object is available in API version 26.0 and later.

You can only create, edit, and delete sharing entries for standard objects whose `RowCause` field is set to `Manual`. Sharing entries for standard objects with different `RowCause` values are created as a result of your Salesforce org's sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren't stored at all.



Note: While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it's possible that we'll stop storing certain share records to improve performance. As a best practice, don't create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, only standard users or users with the Customize Application permission can access this object.

Fields

The properties available for some fields depend on the default organization-wide sharing settings. The properties listed are true for the default settings of such fields.

Field	Details
<code>IsActive</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Read-only. Indicates whether the User has access to log in (<code>true</code>) or not (<code>false</code>). You can modify a User's active status from the user interface or via the API.
<code>RowCause</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is <code>Manual</code>. If no value is specified, the field defaults to <code>Manual</code>.

Field	Details
	All other <code>RowCause</code> values are read-only. After the sharing entry is created, this field can't be edited. Possible values include: • <code>Manual</code>—The User or Group has access to the user record because a User with "All" access manually shared the User with them. • <code>Rule</code>—The User or Group has access to the user record via a User sharing rule. • <code>GuestRule</code>—The User or Group has access via a User guest user sharing rule. • <code>LpuImplicit</code>—The User has access to records owned by high-volume Experience Cloud site users via a share group.
<code>UserAccessLevel</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Level of access that the User or Group has to the specified user. The specified user is denoted by the <code>UserId</code>. The possible values are: • <code>Read</code> • <code>Edit</code> This field must be set to an access level that is at least equal to the organization's default <code>UserAccessLevel</code>. <code>UserAccessLevel</code> can be updated only if <code>RowCause</code> is set to <code>Manual Sharing</code>.
<code>UserId</code>	Type reference Properties Create, Filter, Group, Sort Description ID of the User being shared. This is a relationship field. Relationship Name User Relationship Type Lookup Refers To User
<code>UserOrGroupId</code>	Type reference

Field	Details
	Properties Create, Filter, Group, Sort
	Description ID of the User or Group that has been given access to the User. This field can't be updated. This is a polymorphic relationship field.
	Relationship Name UserOrGroup
	Relationship Type Lookup
	Refers To Group, User

Usage

This object allows you to determine which users and groups can view or edit User records owned by other users.

UserSharedFeature

For internal use only.

UserTeamMember

Represents a single User on the default opportunity team of another User.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

- This object is available only in organizations that have enabled the team selling functionality.
- Customer Portal users can't access this object.

Fields

Field	Details
OpportunityAccessLevel	Type picklist Properties Create, Filter, Restricted picklist, Update Description Required. Level of access that the team member has to opportunities for which the user has added his or her default opportunity team. The possible values are: • Read • Edit This field must be set to an access level that is higher than the organization's default access level for opportunities.
OwnerId	Type reference Properties Create, Filter Description Required. ID of the User who owns the default opportunity team. This field can't be updated.
TeamMemberRole	Type picklist Properties Create, Filter, Nillable, Update Description Role that the team member has on opportunities for which the User has added his or her default opportunity team. The valid values are set by the organization's administrator in the Opportunity Team Roles picklist. Label is Team Role.
UserId	Type reference Properties Create, Filter Description Required. ID of the User who is a member of the default opportunity team. This field can't be updated.

Usage

If you attempt to create a record that matches an existing record, the create request updates any modified fields and returns the existing record.

Users can set up their default opportunity team to include other users that typically work with them on opportunities.

SEE ALSO:

[OpportunityTeamMember](#)

UserTerritory

Represents a User who has been assigned to a Territory.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

- Only available if territory management has been enabled for your organization.
- As of Spring '20 and later, only users with the View Setup and Configuration permission can access this object, and only users with the Manage Territories permission can edit this object.

Fields

Field	Details
IsActive	Type boolean Properties Defaulted on create, Filter Description Indicates whether the user is active in the given territory (<code>true</code>), or inactive in the given territory (<code>false</code>): • Users who are active in a territory are explicitly assigned to the territory and can have open opportunities, closed opportunities, or no opportunities associated with that territory. • Users who are inactive in a territory are not explicitly assigned to the territory, but own an open or closed opportunity that is associated with the territory. For example, a user may have been transferred out of a territory, but still own opportunities in his or her old territory. Until a user is deleted from a territory (not simply removed from the territory), the record is not returned in a <code>getDeleted()</code> call.

Field	Details
IsDeleted	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
TerritoryId	Type reference Properties Create, Filter Description ID of the Territory to which the user has been assigned. This field is required when creating a record in API version 20.0 and later.
UserId	Type reference Properties Create, Filter Description ID of the user. This field is required when creating a record.

Usage

If a user is inactive in a territory, and the opportunities they own that are associated with the territory are all closed, the user is not returned in the Territories related list on the User page in Setup. Regardless of whether the user is inactive or the opportunities are closed, the user is returned in the Quotas related list.

SEE ALSO:

[Territory](#)

[AccountTerritoryAssignmentRule](#)

[AccountTerritoryAssignmentRuleItem](#)

UniqueQueryEventLog

Unique Query events capture specific search queries (SOQL), filter IDs, and report IDs that are processed, along with the underlying database queries (SQL). This object is available in API version 65.0 and later.

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

Fields

Field	Details
<code>BotIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The ID of the bot.
<code>BotSessionIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The bot session ID.
<code>LoginKey</code>	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring.
<code>PlannerIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The ID of the agent planner.
<code>QueryIdentifier</code>	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The text of the SOQL query run or the Id of the report or list view run.
QueryType	Type string Properties Filter, Group, Nillable, Sort Description The input type to the optimizer that was translated.
RequestIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same REQUEST_ID.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started.
SqlIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The unique identifier generated for the database query. (Its SQL Id in the ELF);
Timestamp	Type dateTime Properties Filter, Nillable, Sort Description Timestamp at which the log event was generated.

UserTerritory2Association

Represents an association (by assignment) between a territory and a user record. Available only if Sales Territories has been enabled.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Standard and partner users can access this object. If a territory model is in `Active` state, any standard or partner user can view that model, including its territories and assignment rules. For territories in an active model, any standard or partner user can view assigned records and assigned users based on your Salesforce sharing settings. Users cannot view territory models in other states (such as `Planning` or `Archived`).

Fields

 **Note:** UserTerritory2Association doesn't support adding custom fields.

Field Name	Details
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the user is active (<code>true</code>) or inactive (<code>false</code>) in the given territory.
RoleInTerritory2	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The role of the user in a territory. Possible values are: Owner, Administrator, Sales Rep. Label is <code>Role in Territory</code>.
Territory2Id	Type reference Properties Create, Filter, Group, Sort Description The ID of the territory that the user is assigned to.

Field Name	Details
UserId	Type reference Properties Create, Filter, Group, Sort Description The ID of the user who is assigned to the territory.

UserTerritory2AssocLog

Represents a log of when a user is assigned and unassigned from a territory. This object is available in API version 57.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Special Access Rules

To see this object, enable Sales Territory and User Tracking on the Territory Settings page. Activate a territory model to start the tracking.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description ISO code of currency. Possible values are: • EUR—Euro • INR—Indian Rupee • USD—U.S. Dollar The default value is USD.
EndDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description Date when the user is unassigned from a territory. If the end date is empty, the user is still assigned.
Name	Type string Properties Filter, Group, idLookup, Sort, Update Description Auto-generated unique name of the log.
RoleInTerritory2	Type picklist Properties Filter, Group, Nillable, Sort Description User's role in the territory between the start and end date. The picklist is, by default, empty. Add values to this field using Object Manager.
StartDate	Type dateTime Properties Filter, Sort Description Date the user is assigned to the territory.
Territory2Id	Type reference Properties Filter, Group, Sort Description ID of the territory associated with the log. This field is a relationship field. Relationship Name Territory2 Refers To Territory2
Territory2ModelId	Type reference

Field	Details
	Properties Filter, Group, Nillable, Sort Description ID of the territory model associated with the log. This field is a relationship field. Relationship Name Territory2Model Refers To Territory2Model
UserId	Type reference Properties Filter, Group, Sort Description ID of the user associated with the log. This field is a relationship field. Relationship Name User Refers To User

UserUIPreference

Represents user preferences for Salesforce components. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Fields

Field	Details
AsyncOperationTrackers	Type textarea

Field	Details
	Properties Create, Update Description Stores a JSON object that maps each quote ID to its asynchronous sales transaction request details, which includes a tracker ID and the start date. This field is available with Revenue Cloud in API version 66.0 and later.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The system-generated number for the user preferences. Read-only.
ObjectScope	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The API name of the object that the preference applies to. For example, the preference applies to the Quote object.
PreferenceAttribute	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Specifies the type of preference.
SourceScope	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Specifies the component, feature, or product that the preference is for. For example, a preference for column widths that's associated with the Transaction Line Table component in Revenue Cloud.
UserId	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description The user associated with the user preferences. This field is a relationship field. Relationship Name User Relationship Type Master-detail Refers To User (the master object)
Value	Type textarea Properties Create, Update Description The JSON for the user's preferences.

UserWorkList

Represents a list of work items in the My List tab for Sales Engagement users.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Whether the work list is active or not.
ListType	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of list, such as a call or email.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the work list.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the list.

UserWorkListItem

Represents an individual work item in the My List tab for Sales Engagement users.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
PriorityOrder	Type int Properties Filter, Group, Nillable, Sort Description The order of the item in the list.

Field	Details
RelatedRecordId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the related record.
UserWorkListId	Type reference Properties Create, Filter, Group, Sort Description The ID of the related work list.

VendorCallCenterStatusMap

Stores a mapping between a call center vendor agent status and a Salesforce presence status for an associated call center. This object is available in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, Omni-Channel and Service Cloud Voice must be enabled.

Fields

Field	Details
CallCenterId	Type reference Properties Create, Filter, Group, Sort, Update Description Reference to a call center. This is a relationship field. Relationship Name CallCenter

Field	Details
	Relationship Type Lookup
	Refers To CallCenter
ExternalStatus	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description Status value to set for the call center vendor agent.
ServicePresenceStatusId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description Reference to a presence status that can be assigned to a service channel. This is a relationship field.
	Relationship Name ServicePresenceStatus
	Relationship Type Lookup
	Refers To ServicePresenceStatus

VerificationHistory

Represents the past six months of your org users' attempts to verify their identity. This object is available in API version 36.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Special Access Rules

Only users with Manage Users permission can access this object.

Fields

Field Name	Details
Activity	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The action the user attempted that requires identity verification. The label is User Activity. Available values are: • <code>AccessReports</code>—The user attempted to access reports or dashboards. • <code>Apex</code>—The user attempted to access a Salesforce resource with a verification Apex method. • <code>ChangeEmail</code>—The user attempted to change an email address. • <code>ConnectSms</code>—The user attempted to connect a phone number. • <code>ConnectToopher</code>—The user attempted to connect Salesforce Authenticator. • <code>ConnectTotp</code>—The user attempted to connect a one-time password generator. • <code>ConnectU2F</code>—The user attempted to register a U2F security key. • <code>ConnectWebAuth</code>—The user attempted to register a built-in authenticator. • <code>ConnectedApp</code>—The user attempted to access a connected app. • <code>EnableLL</code>—The user attempted to enroll in Lightning Login. • <code>ExportPrintReports</code>—The user attempted to export or print reports or dashboards. • <code>ExternalClientApp</code>—The user attempted to access an external client app. • <code>ExtraVerification</code>—Reserved for future use. • <code>ListView</code>—The user attempted to access a list view. • <code>Login</code>—The user attempted to log in. • <code>Registration</code>—Reserved for future use. • <code>TempCode</code>—The user attempted to generate a temporary verification code.
EventGroup	Type int Properties Filter, Group, Sort Description ID of the verification attempt. Verification can involve several attempts and use different verification methods. For example, in a user's session, a user enters an invalid verification code (first attempt). The user then enters the correct code and

Field Name	Details
	successfully verifies identity (second attempt). Both attempts are part of a single verification and, therefore, have the same ID. The label is Verification Attempt.
LoginGeoId	Type reference Properties Filter, Group, Nillable, Sort Description The 18-character ID for the record of the geographic location of the user for a successful or unsuccessful identity verification attempt. Due to the nature of geolocation technology, the accuracy of geolocation fields (for example, country, city, postal code) can vary. This is a relationship field. Relationship Name LoginGeo Relationship Type Lookup Refers To LoginGeo
LoginHistoryId	Type reference Properties Filter, Group, Sort Description The ID for the record of the user's successful or unsuccessful login attempt. This is a relationship field. Relationship Name LoginHistory Relationship Type Lookup Refers To LoginHistory
Policy	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The identity verification security policy or setting. The label is Triggered By. Available values are:

Field Name	Details
	• CustomApex—Identity verification made by a verification Apex method. • DeviceActivation—Identity verification required for users logging in from an unrecognized device or new IP address. This verification is part of Salesforce's risk-based authentication. • EnableLightningLogin—Identity verification required for users enrolling in Lightning Login. This verification is triggered when the user attempts to enroll. Users are eligible to enroll if they have the Lightning Login User user permission and the org has enabled Allow Lightning Login in Session Settings. • ExtraVerification—Reserved for future use. • HighAssurance—High assurance session required for resource access. This verification is triggered when the user tries to access a resource, such as a connected app, report, or dashboard, that requires a high-assurance session level. • LightningLogin—Identity verification required for internal users logging in via Lightning Login. This verification is triggered when the enrolled user attempts to log in. Users are eligible to log in if they have the Lightning Login User user permission and have successfully enrolled in Lightning Login. Also, from Session Settings in Setup, Allow Lightning Login must be enabled. • PageAccess—Identity verification required for users attempting to perform an action, such as changing an email address or adding a verification method for multi-factor authentication (MFA). • PasswordlessLogin—Identity verification required for customers attempting to log in to an Experience Cloud site that is set up for passwordless login. The admin controls which registered verification methods can be used, for example, email, SMS, Salesforce Authenticator, or TOTP. • ProfilePolicy—Session security level required at login. This verification is triggered by the Session security level required at login setting on the user's profile. • TwoFactorAuthentication—Multi-factor authentication (formerly called two-factor authentication) required at login. This verification is triggered by the Multi-Factor Authentication for User Interface Logins user permission assigned to a custom profile. Or the user permission is included in a permission set that is assigned to a user.
Remarks	Type string Properties Filter, Group, Nillable, Sort Description The text the user sees on the page or in Salesforce Authenticator when prompted to verify identity. For example, if identity verification is required for a user's login, the user sees "You're trying to Log In to Salesforce." In this case, the Remarks value is "Log In to Salesforce." But if the Activity value is Apex, the Remarks value

Field Name	Details
	is a custom description passed by an Apex method. If the user is verifying identity using Salesforce Authenticator, the custom description also appears in the app. If the custom description isn't specified, the value is the name of the Apex method. The label is Activity Message.
ResourceId	Type reference Properties Filter, Group, Nillable, Sort Description If the <code>Activity</code> value is <code>ConnectedApp</code>, the <code>ResourceId</code> value is the ID of the connected app. The label is Connected App ID. This is a relationship field. Relationship Name Resource Relationship Type Lookup Refers To ConnectedApplication
SourceIp	Type string Properties Filter, Group, Sort Description The IP address of the machine from which the user attempted the action that requires identity verification. For example, the IP address of the machine from where the user tried to log in or access reports. If it's a non-login action that required verification, the IP address can be different from the address from where the user logged in. This address can be an IPv4 or IPv6 address.
Status	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The status of the identity verification attempt. Available values are: • <code>AutomatedSuccess</code>—Salesforce Authenticator approved the request for access because the request came from a trusted location. After users enable location services in Salesforce Authenticator, they can designate trusted locations. When a user trusts a location for a particular activity, such as logging in from a recognized device, that activity is approved from the trusted location for as long as the location is trusted.

Field Name	Details
	• Denied—The user denied the approval request in the authenticator app, such as Salesforce Authenticator. • FailedGeneralError—An error caused by something other than an invalid verification code, too many verification attempts, or authenticator app connectivity. • FailedInvalidCode—The user entered an invalid verification code. • FailedInvalidPassword—The user entered an invalid password. • FailedPasswordLockout—The user attempted to enter a password too many times. • FailedTooManyAttempts—The user attempted to verify identity too many times. For example, the user entered an invalid verification code repeatedly. • Initiated—Salesforce initiated identity verification but hasn't yet challenged the user. • InProgress—Salesforce challenged the user to verify identity and is waiting for the user to respond or for Salesforce Authenticator to send an automated response. • RecoverableError—Salesforce can't reach the authenticator app to verify identity, but it continues to retry. • ReportedDenied—The user denied the approval request in the authenticator app, such as Salesforce Authenticator, and also flagged the approval request to report to an administrator. • Succeeded—The user's identity was verified.
UserId	Type reference Properties Filter, Group, Sort Description ID of the user verifying identity. This is a relationship field. Relationship Name User Relationship Type Lookup Refers To User
VerificationMethod	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort

Field Name

Details

Description

The method by which the user attempted to verify identity in the verification event. The label is Method. Available values are:

- **BuiltInAuthenticator**—A built-in authenticator set up on the user's device, such as Touch ID or Windows Hello, generated the required credentials. This value is available in API version 53.0 and later.
- **Email**—Salesforce sent an email with a verification code to the address associated with the user's account.
- **EnableLL**—Salesforce Authenticator sent a notification to the user's mobile device to enroll in Lightning Login. This value is available in API version 38.0 and later.
- **LL**—Salesforce Authenticator sent a notification to the user's mobile device to approve login via Lightning Login. This value is available in API version 38.0 and later.
- **PwlessPasskey (beta)**—Salesforce prompted the user to use a passkey to perform passwordless login. This value is available in API version 66.0 and later.

Passwordless login with passkeys is a pilot or beta service that is subject to the Beta Services Terms at [Agreements - Salesforce.com](#) or a written Unified Pilot Agreement if executed by Customer, and applicable terms in the [Product Terms Directory](#). Use of this pilot or beta service is at the Customer's sole discretion.

- **SalesforceAuthenticator**—Salesforce Authenticator sent a notification to the user's mobile device to verify account activity.
- **Sms**—Salesforce sent a text message with a verification code to the user's mobile device. SMS messaging requires a Salesforce add-on license for Identity Verification Credits.
- **TempCode**—A Salesforce admin or a user with the Manage Multi-Factor Authentication in User Interface permission generated a temporary verification code for the user. This value is available in API version 37.0 and later.
- **Totp**—An authenticator app generated a time-based, one-time password (TOTP) on the user's mobile device.
- **U2F**—A U2F security key generated required credentials for the user. This value is available in API version 38.0 and later.

VerificationTime

Type

dateTime

Properties

Filter, Sort

Description

The date and time of the identity verification attempt, for example, 7/19/2025, 3:19:13 PM PDT. The time zone is based on GMT. The label is Time.

Usage

Here are two examples queries that you can perform on VerificationHistory.

Query	String
Show verification history for a user's login record	<code>SELECT Activity, EventGroup, Policy, Remarks, Status, UserId, VerificationMethod, VerificationTime FROM VerificationHistory WHERE LoginHistoryId = '0YaD000#####'</code>
Get detailed geographic location information for a user's verification attempt	<code>SELECT City, CountryIso, Latitude, Longitude, PostalCode FROM LoginGeo WHERE LoginGeoId = '0LE#####'</code>

VisualforceAccessMetrics

Represents summary statistics for Visualforce pages.

Supported Calls

`count()`, `describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

As of Spring '20 and later, to access VisualforceAccessMetrics, users must have the Customize Application permission.

Fields

Field	Details
ApexPageId	Type reference Properties Aggregate, Filter, Group, Sort Description The ID of the Visualforce page. This is a relationship field. Relationship Name ApexPage Relationship Type Lookup Refers To ApexPage

Field	Details
ProfileId	Type reference Properties Aggregate, Filter, Group, Nillable, Sort Description The ID of the use who viewed the Visualforce page. This is a relationship field. Relationship Name Profile Relationship Type Lookup Refers To Profile
DailyPageViewCount	Type int Properties Aggregate, Filter, Group, Nillable, Sort Description The number of views received by the specified Visualforce page.
MetricsDate	Type date Properties Aggregate, Filter, Group, Sort Description The date the metrics are queried.
LogDate	Type date Properties Aggregate, Filter, Group, Nillable, Sort Description The most recent page access date.

Usage

Use this object to query information on the Visualforce pages in your org.

```
SELECT ApexPageId, DailyPageViewCount, Id, ProfileId, MetricsDate, LogDate FROM VisualforceAccessMetrics
```

VisualforceRequestEventLog

Visualforce Request events contain details of Visualforce requests. Requests can originate from the browser (UI). This object is available in API version 61.0 and later.

 **Note:** This object stores event data that's queryable from platform APIs. For event data stored in event log files, see [EventLogFile](#).

Supported Calls

`describeSObjects()`, `query()`

Special Access Rules

To access this object, you must have the View Event Log Object Data user permission.

 **Note:** This feature is a Beta Service. Customer may opt to try such Beta Service in its sole discretion. Any use of the Beta Service is subject to the applicable Beta Services Terms provided at [Agreements and Terms](#).

Fields

Field	Details
ClientIp	Type string Properties Filter, Group, Nillable, Sort Description The IP address of the client that's using Salesforce services. A Salesforce internal IP (such as a login from AppExchange) is shown as "Salesforce.com IP". For example: 96 . 43 . 144 . 26.
ControllerType	Type string Properties Filter, Group, Nillable, Sort Description The type of controller that's used by the requested Visualforce page. Possible values are: 0—Not Specified 1—Standard 2—Standard Set 3—Custom 4—Java 5—Spring

Field	Details
CpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds used to complete the request. This field indicates the amount of activity taking place in the app server layer.
DatabaseBlocks	Type double Properties Filter, Nillable, Sort Description Indicates how much activity is occurring in the database. A high value for this field suggests that adding indexes or filters on your queries benefits performance.
DatabaseCpuTime	Type double Properties Filter, Nillable, Sort Description The CPU time in milliseconds to complete the request. Indicates the amount of activity taking place in the database layer during the request.
DatabaseTotalTime	Type double Properties Filter, Nillable, Sort Description The time in nanoseconds for a database round trip. Includes time spent in the JDBC driver, network to the database, and DatabaseCpuTime. Compare this field to CpuTime to determine whether performance issues are occurring in the database layer or in your own code.
HttpMethod	Type string Properties Filter, Group, Nillable, Sort Description The HTTP method of the request. For example: GET, POST, PUT, and so on.

Field	Details
IsAjaxRequest	Type boolean Properties Defaulted on create, Filter, Group, Sort Description The value is <code>true</code> if the request is a partial page request. The default value is <code>false</code>.
IsFirstRequest	Type boolean Properties Defaulted on create, Filter, Group, Sort Description 1 if this page is the first Visualforce transaction in the request, or 0 if it isn't. The default value is 0.
LoginKey	Type string Properties Filter, Group, Nillable, Sort Description The string that ties together all events in a given user's login session. It starts with a login event and ends with either a logout event or the user session expiring. For example: <code>GeJCsym5eyvtEK2I.</code>
ManagedPackageNamespace	Type string Properties Filter, Group, Nillable, Sort Description If the page is part of a managed package, the namespace of that package.
PageName	Type string Properties Filter, Group, Nillable, Sort Description The name of the Visualforce page that was requested.
QueryString	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description The query string used to access the requested Visualforce page. Example Let's assume that the requested Visualforce page (/apex/myAccountDetailPage?id=001xx000003GYv6AAG) shows details of the account whose ID is in the URL. The value of <code>QueryString</code> in this case is <code>?id=001xx000003GYv6AAG</code>.
<code>RequestIdentifier</code>	Type string Properties Filter, Group, Nillable, Sort Description The unique ID of a single transaction. A transaction can contain one or more events. Each event in a given transaction has the same <code>RequestIdentifier</code>. For example: <code>3nWgxWbDKWWDIk0FKfF5DV</code>.
<code>RequestSize</code>	Type double Properties Filter, Nillable, Sort Description The size of the callout response, in bytes.
<code>RequestStatus</code>	Type String Description The status of the request for a page view or user interface action. For example: • <code>S</code>—Success. Salesforce handled the request successfully. If an Apex controller throws an exception, this status is also returned. • <code>F</code>—Failure. Typically 4xx or 5xx HTTP codes, such as no permission to view page, page took too long to render, page is read-only. • <code>U</code>—Undefined • <code>A</code>—Authorization Error • <code>R</code>—Redirect. Typically a 3xx HTTP code, possibly initiated by an Apex controller in a Visualforce page. • <code>N</code>—Not Found. 404 error. This field can have a blank value.

Field	Details
RequestType	Type string Properties Filter, Group, Nillable, Sort Description The request type. Possible values are: • <code>page</code>—A normal request for a page • <code>content_UI</code>—A content request for a page that originated in the user interface • <code>content_apex</code>—A content request initiated by an Apex call • <code>PDF_UI</code>—A request for a page in PDF format through the user interface • <code>PDF_apex</code>—A request for PDF format by an Apex call (usually a Web Service call)
ResponseSize	Type double Properties Filter, Nillable, Sort Description The size of the callout request body, in bytes.
RunTime	Type double Properties Filter, Nillable, Sort Description The amount of time that the request took in milliseconds.
SessionKey	Type string Properties Filter, Group, Nillable, Sort Description The user's unique session ID. You can use this value to identify all user events within a session. When a user logs out and logs in again, a new session is started. For example: <code>d7DEq/ANa7nNZZVD</code>.
Timestamp	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The access time of Salesforce services in GMT. For example, 2020-01-20T19:12:26.965Z. Milliseconds are the most granular setting.
Uri	Type string Properties Filter, Group, Nillable, Sort Description The URI of the page that's receiving the request. For example: /home/home.jsp.
UserIdentifier	Type string Properties Filter, Group, Nillable, Sort Description The 15-character ID of the user who's using Salesforce services through the UI or the API. For example: 00530000009M943.
UserType	Type string Properties Filter, Group, Nillable, Sort Description The category of user license. Possible values are: • CsnOnly—Users whose access to the application is limited to Chatter. This user type includes Chatter Free and Chatter moderator users. • CspLitePortal—CSP Lite Portal license. Users whose access is limited because they're organization customers and access the application through a customer portal or an Experience Cloud site. • CustomerSuccess—Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. • Guest—Users whose access is limited so that your customers can view and interact with your site without logging in. • PowerCustomerSuccess—Power Customer Success license. Users whose access is limited because they're organization customers and access the application through a customer portal. Users with this license type can view and edit data they directly own or data owned by or shared with users below them in the customer portal role hierarchy. • PowerPartner—Power Partner license. Users whose access is limited because they're partners and typically access the application through a partner portal or site.

Field	Details
	SelfService—Users whose access is limited because they're organization customers and access the application through a self-service portal. Standard—Standard user license. This user type also includes Salesforce Platform and Salesforce Platform One user licenses, and admins for this org.
ViewStateSize	Type double Properties Filter, Nillable, Sort Description The size of the Visualforce view state in bytes.

VideoCall

Represents a video call. One `VideoCall` record can be related to several `VideoCallRecording` records — for example, a video call can have several video recordings and a transcript. As well, one video call record can be associated with several video call participant records. This object is available in API version 51.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`

Fields

Field	Details
AcceptanceTimeStamp	Type dateTime Properties Create, Filter, Nillable, Sort Description The timestamp when the user consented for uploading the video call recording. Reserved for future use. This field is available in API version 62.0 and later.
ConsentedUserId	Type reference Properties Create, Filter, Group, Nillable, Sort

Field	Details
	Description The ID of the user who consented to upload the video call recording. Reserved for future use. This field is available in API version 62.0 and later. This field is a relationship field. Relationship Name ConsentedUser Refers To User
Description	Type textarea Properties Create, Nillable, Update Description Description of the video call. Typically, the sales rep enters the description.
DurationInSeconds	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The video call duration in seconds.
EndTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Time the video call ended, in universal time coordinated (UTC).
EventId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the event record associated with this video call. Reserved for future use. This is a relationship field. Relationship Name Event

Field	Details
	Relationship Type Lookup Refers To Event
ExternalId	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The ID of the video call, sent by the video call provider.
HostId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the user who hosted the meeting. This is a relationship field. Relationship Name Host Relationship Type Lookup Refers To User
IntelligenceScore	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The Einstein Intelligence score for the video call. Video calls with higher scores are likely to contain more relevant information. For example, video calls where product names and competitor names are mentioned tend to have a higher score.
IsCallCoachingIncluded	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Indicates whether Einstein Conversation Insights is available for this org and this user (<code>true</code>) or not (<code>false</code>).
IsDiarizationOptIn	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether optimal speaker separation (diarization) is opted in (<code>true</code>) or not (<code>false</code>) for the call.
IsLegacyProcessingSkipped	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether legacy processing is skipped (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .
IsRecorded	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the video call was recorded (<code>true</code>) or not (<code>false</code>).
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last viewed this record or list view. If this value is <code>null</code>, the user might have only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
MeetingType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of the call. Reserved for future use. This field is available in API version 61.0 and later. Possible values are: • <code>EXTERNAL</code>—A call with two or more participants (default). • <code>MANUAL</code>—A call that is manually uploaded. • <code>SINGLE_USER</code>—A single user call where the sales rep is evaluated and coached.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the video call. Typically entered by the sales rep.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who created the video call. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
RelatedRecordId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the account or opportunity related to this video call. This is a polymorphic relationship field. Relationship Name RelatedRecord Relationship Type Lookup Refers To Account, Opportunity
StartDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time that the video call started, in universal time coordinated (UTC).
TranscribedLanguage	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The language that is transcribed for this video call.
UsageType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The cloud using the VideoCall. This field is available in API version 63.0 and later. Possible values are: • Life Sciences—Remote Engagement. • Sales Cloud
VendorMeetingKey	Type string

Field	Details
	Properties Create, Filter, Group, Sort, Update Description The vendor's ID for this video call.
VendorMeetingUuid	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The vendor's unique identifier for this video call.
VendorName	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The name of the vendor providing the video call software. Possible values are: • AMAZON CHIME—Amazon Chime • ConversationAgent—Conversation Agent • Gong • INTERNAL—Internal • InPerson—In Person • ZOOM—Zoom • googlemet—Google Meet • msteams—Microsoft Teams • twilio—Twilio

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

VideoCallChangeEvent (API version 51.0)

Change events are available for the object.

VideoCallOwnerSharingRule on page 65 (API version 66.0)

Sharing rules are available for the object.

VideoCallShare on page 67 (API version 66.0)
Sharing is available for the object.

SEE ALSO:
[VideoCallParticipant](#)
[VideoCallRecording](#)

VideoCallInsight

Represents the video call insight data associated with a video call. Each record represents the call insight of a specific recording or transcript within a call. This object is available in API version 66.0 and later.

-  **Note:** This object is available for Einstein Conversation Insights customers whose data is stored natively on the Salesforce Platform. If you turned on Einstein Conversation Insights for the first time starting in Spring '26, this object is available to query and access using Salesforce tools. For existing ECI customers, data migration and access to related Salesforce Platform objects is scheduled to begin in Summer '26.
-  **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Einstein Conversation Insight must be enabled and the user requires the Conversation Insights for Sales permission set.

Fields

Field	Details
EngagementInsightType	Typestring PropertiesFilter, Group, Sort DescriptionRequired. The unique identifier of the platform setup entity that defines the configuration for this engagement insight type.
GenerationDateTime	TypedateTime PropertiesFilter, Sort

Field	Details
	Description Required. The timestamp when the call insight was generated.
InsightConfigName	Type string Properties Filter, Group, Nillable, Sort Description The name of the insight configuration, or category, used to classify the insight.
InsightLanguage	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Required. The language associated with the insight type. Each insight type is currently limited to a single language. If the same insight type is mapped to a different language, a new insight type is created.
InsightModel	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Required. The category of the insight type. Possible values are: • GENERATIVE—Generative • KEYWORD—Keyword • SITUATIONAL—Situational • TIME_BASED—Time-Based The default value is KEYWORD.
InsightOccurenceCount	Type int Properties Filter, Group, Nillable, Sort Description The number of times a particular insight occurred in the transcript.
InsightSubject	Type string

Field	Details
	Properties Filter, Group, Nillable, Sort Description The specific text, phrase, or subject identified in the video call transcript that serves as the basis for the insight.
InsightText	Type textarea Properties Nillable Description The text content of the insight derived from the video call transcript.
Name	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The display name of the insight type.
Scope	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Required. The scope of the insight type. Possible values are: • Organization • User The default value is Organization.
VideoCallId	Type reference Properties Filter, Group, Sort Description Required. ID of the associated parent VideoCall. This field is a relationship field. Relationship Name VideoCall

Field	Details
	Relationship Type Master-detail
	Refers To VideoCall (the master object)
VideoCallRecordingId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description Required. ID of the associated parent VideoCallRecording. This field is a relationship field.
	Relationship Name VideoCallRecording
	Refers To VideoCallRecording
VideoCallTranscriptId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description Required. ID of the associated VideoCallTranscript record.
	Relationship Name VideoCallTranscript
	Refers To VideoCallTranscript

VideoCallInsightAction

Represents a suggested follow-up action derived from a video call insight. VideoCallInsightAction manages recommended steps—such as sending an email, creating a task, or scheduling a meeting—that address specific moments, including competitor mentions, pricing discussions, or objections. This object is available in API version 66.0 and later.



Note: This object is available for Einstein Conversation Insights customers whose data is stored natively on the Salesforce Platform. If you turned on Einstein Conversation Insights for the first time starting in Spring '26, this object is available to query and access using Salesforce tools. For existing ECI customers, data migration and access to related Salesforce Platform objects is scheduled to begin in Summer '26.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Einstein Conversation Insight must be enabled and the user requires the Conversation Insights for Sales permission set.

Fields

Field	Details
ActionCategory	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The category that classifies the purpose of the action. Possible values are: - FollowUp - NeedsAttention
ActionReferenceId	Type reference Properties Filter, Group, Nillable, Sort Description Required. ID of the reference record associated with the generated action. This field is a relationship field. Relationship Name ActionReference Refers To VideoCallInsightReason
ActionType	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The specific type of action to be performed for the insight. Possible values are: CreateCalendarEvent

Field	Details
	- CreateTaskWithDate - EciCreateCallback - EciScheduleMeetings - EciSendCallResponse - ViewContactProfile The default value is CreateTaskWithDate.
CompletionDateTime	Type dateTime Properties Filter, Nillable, Sort Description Required. The timestamp when the action was completed.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the insight action.
Status	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The status of the insight action. Possible values are: - Active - Completed The default value is Active.
VideoCallInsightId	Type reference Properties Filter, Group, Sort Description Required. ID of the VideoCallInsight record associated with a video call. Each record represents the call insight of a specific recording or transcript within a call. This field is a relationship field.

Field	Details
	Relationship Name VideoCallInsight
	Relationship Type Master-detail
	Refers To VideoCallInsight (the master object)

VideoCallInsightReason

Represents the video call insight reason that contains the insight keyword, insight moments associated with a keyword, and the number of keyword occurrences. This object is available in API version 66.0 and later.

 **Note:** This object is available for Einstein Conversation Insights customers whose data is stored natively on the Salesforce Platform. If you turned on Einstein Conversation Insights for the first time starting in Spring '26, this object is available to query and access using Salesforce tools. For existing ECI customers, data migration and access to related Salesforce Platform objects is scheduled to begin in Summer '26.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Einstein Conversation Insight must be enabled and the user requires the Conversation Insights for Sales permission set.

Fields

Field	Details
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the insight reason.
OccurrenceInfo	Type string

Field	Details
	Properties Filter, Nillable, Sort Description The number of times the given keyword was mentioned in the call.
OccurrenceSnippet	Type textarea Properties Nillable Description The specific excerpt from the video call transcript that helped generate the insight. Reserved for future use.
VideoCallInsightId	Type reference Properties Filter, Group, Sort Description Required. ID of the VideoCallInsight record associated with a video call. Each record represents the call insight of a specific recording or transcript within a call. This field is a relationship field. Relationship Name VideoCallInsight Relationship Type Master-detail Refers To VideoCallInsight (the master object)

VideoCallParticipant

Represents a participant in a video call. Participant information can come from the video call provider (for example, Zoom), or Salesforce. This object is available in API version 51.0 and later.



Note: This object is available for Einstein Conversation Insights customers whose data is stored natively on the Salesforce Platform. If you turned on Einstein Conversation Insights for the first time starting in Spring '26, this object is available to query and access using Salesforce tools. For existing ECI customers, data migration and access to related Salesforce Platform objects is scheduled to begin in Summer '26.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Email	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The email address of the participant, from the video call provider.
IsAllowed	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the participant is admitted into the video call (true) or not (false). The default value is <code>false</code>.
JoinDateTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the participant joins the video call.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view (LastReferencedDate) but not viewed it.
LeaveDateTime	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the participant leaves the video call.
Name	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The participant's name or phone number. This information is provided by the video call provider.
ParticipantType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The role of the participant in the video call. Available in API version 65.0 and later. Possible values are: • Attendee • Organizer
RelatedPersonId	Type reference Properties Filter, Group, Nillable, Sort Description The Salesforce ID of the user, lead, or contact record for this participant. This is a polymorphic relationship field. Relationship Name RelatedPerson Relationship Type Lookup

Field	Details
	Refers To Contact, Lead, User
VideoCallId	Type reference Properties Filter, Group, Sort Description The ID of the video call record. This is a relationship field. Relationship Name VideoCall Relationship Type Lookup Refers To VideoCall

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

VideoCallParticipantChangeEvent (API version 55.0)

Change events are available for the object.

SEE ALSO:

[VideoCall](#)

[VideoCallRecording](#)

VideoCallRecording

Represents a recording from a video call, such as a video recording, a voice recording, or a transcript. Video call recordings aren't saved in Salesforce. This object is available in API version 51.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`,
`search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
DurationInSeconds	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The video call duration in seconds, not the recording duration.
EndTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Time the call ended, in universal time coordinated (UTC).
ExpirationDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Reserved for internal use. This field is available in API version 59.0 and later.
ExternalRecordingKey	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The ID of the video call recording, from the recording provider. For example, the Zoom ID of the recording. This value is unique.
ExternalRecordingKeyLong	Type string Properties Create, Filter, Nillable, Sort, Update Description The ID of the video call recording, from the recording provider, that's more than 255 characters. For example, the MS Team ID of the recording. This value is unique. If <code>ExternalRecordingKey</code> is null, this ID is used by default. Available in API version 61.0 and later.

Field	Details
FileSizeInByte	Type long Properties Create, Filter, Group, Nillable, Sort, Update Description The size of the video call recording, in bytes.
FileType	Type string Properties Create, Filter, Group, Sort, Update Description The file type of the video call recording. Possible values are: • MP4—Video file • M4A—Audio-only file • TIMELINE—Time stamp file in JSON format. • TRANSCRIPT—Transcription files in VTT format. • CHAT—Text file containing chat messages from the video call. • CC—File containing closed captions of the video call recording. The file is in VTT format.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record, a record related to this record, or a list view.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is <code>null</code>, the user only accessed this record or list view (<code>LastReferencedDate</code>) but not viewed it.
Name	Type string

Field	Details
	Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The name of the video call recording, entered by the sales rep.
StartDateTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The start time of the video call recording.
VideoCallRecordId	Type reference Properties Create, Filter, Group, Sort Description ID of the VideoCall record (the parent record). This is a relationship field. Relationship Name VideoCallRecord Relationship Type Lookup Refers To VideoCall

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[VideoCallRecordingChangeEvent](#) (API version 51.0)

Change events are available for the object.

SEE ALSO:

[VideoCallParticipant](#)

[VideoCall](#)

VideoCallRecordingStructure

Represents the structure of a video call recording, having relation to a video call participant, speaking order, start offset, and end offset. This object is available in API version 65.0 and later.

-  **Note:** This object is available for Einstein Conversation Insights customers whose data is stored natively on the Salesforce Platform. If you turned on Einstein Conversation Insights for the first time starting in Spring '26, this object is available to query and access using Salesforce tools. For existing ECI customers, data migration and access to related Salesforce Platform objects is scheduled to begin in Summer '26.
-  **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Einstein Conversation Insight must be enabled and the user requires the Conversation Insights for Sales permission set.

Fields

Field	Details
ListenRatio	Type double Properties Filter, Sort Description The ratio of the time the speaker spent listening versus talking on the call.
Name	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the video call recording.
ParticipantSpeakingOrder	Type int Properties Filter, Group, Sort

Field	Details
	Description The sequence in which participants first spoke during the call. Only the initial speaking turn of each participant is captured.
TalkRatio	Type double Properties Filter, Sort Description The ratio of the time that the speaker spent talking versus listening on the call.
TalkSegment	Type textarea Properties Filter, Nillable, Sort Description The transcript of specific segments that the participant was speaking.
VideoCallId	Type reference Properties Filter, Group, Sort Description ID of the associated VideoCall. This field is a relationship field. Relationship Name VideoCall Relationship Type Master-detail Refers To VideoCall (the master object)
VideoCallParticipantId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the associated VideoCallParticipant. This field is a relationship field. Relationship Name VideoCallParticipant

Field	Details
	Refers To VideoCallParticipant
VideoCallRecordingId	Type reference Properties Filter, Group, Sort Description ID of the associated VideoCallRecording. This field is a relationship field. Relationship Name VideoCallRecording Refers To VideoCallRecording

VoiceCall

Represents a call in Service Cloud Voice, Sales Dialer, or other supported voice connectors. For Service Cloud Voice, this can be a phone or Voice over Internet Protocol (VoIP) call. This object is available in API version 40.0 and later.

To manage VoiceCall records when using Service Cloud Voice, see the [Telephony Integration REST API](#).

The fields in the VoiceCall object apply to the Sales Dialer and Service Cloud Voice features unless otherwise stated in the field description.

In addition to the standard fields listed in this page, you can define up to 300 custom fields for the VoiceCall object.

Supported Calls

```
create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), update(), upsert()
```

Special Access Rules

Only users with the Modify All Data permission can delete call records.

To edit voice call records, Sales Dialer or Service Cloud Voice permissions are required. This includes the Dialer Outbound permission set for Sales Dialer, or the Contact Center Agent or Contact Center Admin permission sets for Service Cloud Voice, or Agentforce Contact Center Admin (Salesforce Voice) permission set.

Fields

Field Name	Details
ActivityId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The unique ID of the activity record. Available in API version 48.0 and later. This is a relationship field. Relationship Name Activity Refers To Task
AgentSentimentScore	Type double Properties Filter, Nillable, Sort Description If Sentiment Journey in Service Cloud Voice is set up, this field represents the rep's overall sentiment score post-call in a conversation event. The value must be between -5 (lowest negative sentiment score) and 5 (highest positive sentiment score), with 0 being a neutral sentiment score. Available in API version 59.0 and later.
CallAcceptDateTime	Type dateTime Properties Create, Filter, Nillable, Sort Description If Service Cloud Voice is enabled, this field represents the date and time (in UTC) when an agent accepts the call. Available in API version 48.0 and later.
CallCenterId	Type reference Properties Create, Filter, Group, Nillable, Sort Description If Service Cloud Voice is enabled, this field represents the unique ID of the call center (CallCenter Id) where the activity took place. Available in API version 48.0 and later. This is a relationship field.

Field Name	Details
CallConnectDateTime	Type datetime Properties Create, Filter, Nillable, Sort Description For Sales Dialer, this field represents the date and time (in UTC) when the call was connected.
CallDisposition	Type string Properties Create, Filter, Group, Nillable, Sort Description The status of the phone call. For Sales Dialer, possible values are: • in progress • busy • failed For Service Cloud Voice, possible values are: • new—The voice call record has been created. • in-progress—The call has been accepted (or, for outbound messages, initiated) by an agent. • completed—The call has ended. This includes calls that are transferred. (If a call is transferred, another voice call record is created to track the state of the transferred call.) If After Conversation Work (ACW) is enabled, that work begins after the call completes.
CallDurationInSeconds	Type int Properties Create, Filter, Group, Nillable, Sort Description The total duration (in seconds) of the call.
CallEndDateTime	Type dateTime Properties Create, Filter, Sort Description The date and time (in UTC) when the call ended.

Field Name	Details
CallerId	Type reference Properties Create, Filter, Group, Nillable, Sort Description For Service Cloud Voice, this field represents the unique ID of the participant who initiated the call. If “Match Callers to End User Records” is enabled in Lightning Experience, the value is null and the <code>EndUserId</code> field is used instead to determine the end user associated with this voice call. Available in API version 48.0 and later. This is a relationship field. Relationship Name Caller Relationship Type Lookup Refer To ConversationParticipant
CallerIdType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description For Sales Dialer, this field represents the number displayed for outbound calls. Possible values are: • <code>VendorLine—User</code>. • <code>CompanyName—Company</code>. • <code>LocalPresence—Local Presence</code>. • <code>CustomCallerId—Custom Caller ID</code>. Available in API version 41.0 and later.
CallOrigin	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Information about how this call originated. For Service Cloud Voice, possible values are: • <code>Preview—Preview dialer</code>. • <code>Progressive—Progressive dialer</code>. • <code>Voicemail—Voicemail call</code>.

Field Name	Details
	Available in API version 56.0 and later.
CallQueuedDateTime	Type dateTime Properties Create, Filter, Nillable, Sort Description If Service Cloud Voice is enabled, this field represents the date and time (in UTC) when the call was added to a queue to be routed to an agent. Available in API version 48.0 and later.
CallRecordingId	Type reference Properties Create, Filter, Group, Nillable, Sort Description For Service Cloud Voice, this field represents the unique ID of the call recording for the voice call. An update to the <code>CallRecordingId</code> value is an internal process and doesn't trigger automation such as flows. Available in API version 41.0 and later. This is a relationship field. Relationship Name CallRecording Relationship Type Lookup Refers To VoiceCallRecording
CallResolution	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update Description The resolution outcome of the call. The default value is <code>Resolved</code>, meaning the call has been resolved. Available in API version 48.0 and later.
CallStartDateTime	Type dateTime Properties Create, Filter, Sort Description The date and time (UTC) when the call started.

Field Name	Details
CallStatus	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description For internal use only. Available in API version 63.0 and later.
CallSubtype	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description For Service Cloud Voice, this field represents the network or protocol over which the phone or Voice over Internet Protocol (VoIP) call is made. Possible values are: • PSTN • WebRTC Available in API version 62.0 and later.
CallType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The types of call. For Sales Dialer, possible values are: • Bridge • Coach • Inbound • Internal • Outbound For Service Cloud Voice, possible values are: • Callback • Consult • Inbound • InternalCall • Outbound • Transfer

Field Name	Details
CoachingDurationInSeconds	Type int Properties Create, Filter, Group, Nillable, Sort Description For Sales Dialer, this field represents the total duration (in seconds) of the coaching session. This field only appears if call coaching is enabled. Available in API version 41.0 and later.
ConferenceKey	Type string Properties Create, Filter, Group, Nillable, Sort Description For Sales Dialer, this field represents the related conference key. This field is only available if call monitoring is enabled. Available in API version 41.0 and later.
ConversationId	Type reference Properties Create, Filter, Group, Nillable, Sort Description If Service Cloud Voice is enabled, this field represents the unique ID of the conversation. This field is only available if call monitoring is enabled. Available in API version 48.0 and later. This is a relationship field. Relationship Name Conversation Relationship Type Lookup Refers To Conversation
CurrencyCode	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description For Sales Dialer, this field represents the ISO currency code used to bill the call.
CustomerHoldDuration	Type int

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort Description If Service Cloud Voice is enabled, this field represents the total duration (in seconds) of all the holds that occurred during the voice call. Available in API version 49.0 and later.
CustomerSentimentScore	Type double Properties Filter, Nillable, Sort Description If Sentiment Journey in Service Cloud Voice is set up, this field represents the customer's overall sentiment score post-call in a conversation event. The value must be between -5 (lowest negative sentiment score) and 5 (highest positive sentiment score), with 0 being a neutral sentiment score. Available in API version 59.0 and later.
Description	Type textarea Properties Create, Nillable, Update Description If Service Cloud Voice is enabled, this field represents a text field where the agent can enter a summary of the call. Available in API version 48.0 and later.
DisconnectReason	Type string Properties Create, Filter, Group, Nillable Description If Service Cloud Voice is enabled, this field represents the reason why the voice call was disconnected. The reason is provided by the partner telephony. For Amazon Connect instances, this value is automatically populated through the contact record if you have Contact Center version 13.0 or later. See DisconnectReason in the Amazon Connect contact records data model page for a list of possible reasons why a voice call may be disconnected. For all other partner telephony models, configure this feature through the <code>disconnectReason</code> parameter in the Update a Voice Call Record Telephony Integration API. Available in API version 59.0 and later.
EndUserId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort Description For Service Cloud Voice, if “Match Callers to End User Records” is enabled in Lightning Experience, this field represents the unique ID of the messaging end user (MessagingEndUserId) associated with this voice call. Available in API version 53.0 and later. This is a relationship field. Relationship Name EndUser Relationship Type Lookup Refers To MessagingEndUser
FromPhoneNumber	Type phone Properties Create, Filter, Group, Sort Description The number of the user who initiated the call.
IsDiarizationOptIn	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether optimal speaker separation (diarization) is opted in (<code>true</code>) or not (<code>false</code>) for the call.
IsRecorded	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether a Voice Call Recording record was created (<code>true</code>) or not (<code>false</code>) for this voice call. The default value is <code>false</code>. Available in API version 44.0 and later.
IvrDuration	Type int

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Total duration, in seconds, that a caller spends in the Interactive Voice Response (IVR) system. The duration includes time spent on automated prompts and responses before being placed in a queue or connected to a service rep. This field is available in API version 66.0 and later.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time (in UTC) when the current user last viewed a record related to this voice call.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time (in UTC) when the current user last viewed this voice call. If the record has not been viewed before, this value is null. Referencing a record (LastReferencedDate) doesn't count as viewing it.
LongestHoldDuration	Type int Properties Create, Filter, Group, Nillable, Sort Description If Service Cloud Voice is enabled, this field represents the longest hold duration (in seconds) that occurred during the call. Available in API version 49.0 and later.
MediaProviderId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The unique ID of the related media provider. Available in API version 49.0 and later. This is a relationship field.

Field Name	Details
	Relationship Name MediaProvider Relationship Type Lookup Refers To CallCoachingMediaProvider
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the voice call record. For example, VC-00000001. Available in API version 60.0 and later.
NextCallId	Type reference Properties Create, Filter, Group, Nillable, Sort Description If Service Cloud Voice is enabled, this field represents the unique ID of the next call if the call was transferred to another agent. If there is no other agent, this value is null. Available in API version 48.0 and later. This is a relationship field. Relationship Name NextCall Relationship Type Lookup Refers To VoiceCall
NumberOfHolds	Type int Properties Create, Filter, Group, Nillable, Sort Description If Service Cloud Voice is enabled, this field represents the number of times the customer was put on hold. Available in API version 49.0 and later.
OwnerId	Type reference

Field Name	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The unique ID of the user who owns the voice call record. Don't modify this field during active call routing through automation, such as record-triggered flows or Apex triggers. Modifying this field during active call routing by customer automation creates conflicts with the Salesforce Voice with Telephony Providers internal platform logic. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PreviousCallId	Type reference Properties Create, Filter, Group, Nillable, Sort Description If Service Cloud Voice is enabled, this field represents the unique ID of the previous call if the call was transferred from another agent. When there is no previous call, this value is null. Available in API version 48.0 and later. This is a relationship field. Relationship Name PreviousCall Relationship Type Lookup Refers To VoiceCall
Price	Type double Properties Create, Filter, Nillable, Sort Description For Sales Dialer, this field represents the cost of the phone call.
QualityScore	Type double

Field Name	Details
	Properties Create, Filter, Nillable, Sort, Update Description If Service Cloud Voice is enabled, this field represents the value of the Mean Opinion Score (MOS) that measures voice call quality. This algorithm is based on packet loss percentage, average latency, and average jitter. Available in API version 53.0 and later.
QueueName	Type string Properties Create, Filter, Group, Nillable, Sort Description If Service Cloud Voice is enabled, this field represents the name of the agent queue. Available in API version 49.0 and later.
RecipientId	Type reference Properties Create, Filter, Group, Nillable, Sort Description For Service Cloud Voice, this field represents the unique ID of the participant who received the call. If “Match Callers to End User Records” is enabled in Lightning Experience, this value is null and the <code>EndUserId</code> field is used instead to determine the end user associated with this voice call. This is a relationship field. Relationship Name Recipient Relationship Type Lookup Refers To ConversationParticipant
RecordTypeId	Type reference Properties Create, Filter, Nillable, Updates Description The ID of the voice call record type assigned to this voice call. If a record type isn't assigned to this voice call, the value is null. Available in API version 59.0 and later. This is a relationship field.

Field Name	Details
	Relationship Name RecordType
	Relationship Type Lookup
	Refers To RecordType
RelatedRecordId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The unique ID of the related record. Associates the VoiceCall record to a standard or custom object record. For Service Cloud Voice, supported related records include the standard objects Account, Case, Collection Plan, Contact, Contact Request, Lead, and Opportunity. For Sales Dialer, supported related records include custom objects. This is a polymorphic relationship field.
	Relationship Name RelatedRecord
	Relationship Type Lookup
	Refers To Account, Case, CollectionPlan, Contact, ContactRequest, Lead, Opportunity
SourceType	Type picklist
	Properties Create, Group, Nillable, Restricted picklist, Sort, Update
	Description The general purpose of the call. The permission sets assigned to the voice call owner determine the value. A call's source type controls which insights Einstein Conversation Insights applies during analysis. Possible values are: • Sales • Service Available in API version 52.0 and later.
ToPhoneNumber	Type phone

Field Name	Details
	Properties Create, Filter, Group, Sort Description The recipient of the call. For inbound, transfer, and callback calls, this value is the agent's number. For outbound calls, this value is the customer's number.
TranscribedLanguage	Type string Properties Filter, Group, Nillable, Sort Description The language that is transcribed for this voice call.
UserId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The unique ID of the Salesforce user who initiates an outbound call or accepts an inbound call. If no one takes the call, this value defaults to null. This is a relationship field. Relationship Name User Relationship Type Lookup Refers To User
VendorCallKey	Type string Properties Create, Filter, Group, Nillable, idLookup, Sort Description The unique ID of the child leg of the call that's provided by the Sales Dialer vendor or Service Cloud Voice telephony provider.
VendorParentCallKey	Type string Properties Create, Filter, Group, Nillable, Sort

Field Name	Details
	Description For Sales Dialer, this field represents the unique ID of the parent leg of the call that's provided by the Dialer vendor.
VendorType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description For Sales Dialer, this field represents the type of Dialer vendor. For Service Cloud Voice, this field is always set to <code>ContactCenter</code> . Available in API version 41.0 and later.
VoiceVendorLineId	Type reference Properties Create, Filter, Group, Nillable, Sort Description For Sales Dialer, this field represents the unique ID of the associated Dialer vendor line. This is a relationship field. Relationship Name VoiceVendorLine Relationship Type Lookup Refers To VoiceVendorLine

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

VoiceCallChangeEvent (Available in API version 48.0 and later)

Change events are available for the object.

VoiceCallFeed (Available in API version 50.0 and later.)

Feed tracking is available for the object.

VoiceCallOwnerSharingRule

Sharing rules are available for the object.

VoiceCallShare

Sharing is available for the object.

VoiceCallInsight

Represents the voice call insight data associated with a voice call. Each record represents the call insight of a specific recording or transcript within a call. This object is available in API version 66.0 and later.

-  **Note:** This object is available for Einstein Conversation Insights customers whose data is stored natively on the Salesforce Platform. If you turned on Einstein Conversation Insights for the first time starting in Spring '26, this object is available to query and access using Salesforce tools. For existing ECI customers, data migration and access to related Salesforce Platform objects is scheduled to begin in Summer '26.
-  **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Einstein Conversation Insight must be enabled and the user requires the Conversation Insights for Sales permission set.

Fields

Field	Details
EngagementInsightType	Typestring PropertiesFilter, Group, Sort DescriptionRequired. The unique identifier of the platform setup entity that defines the configuration for this engagement insight type.
GenerationDateTime	TypedateTime PropertiesFilter, Sort DescriptionRequired. The timestamp when the call insight was generated.
InsightConfigName	Typestring PropertiesFilter, Group, Nillable, Sort

Field	Details
	Description The name of the insight configuration, or category, used to classify the insight.
InsightLanguage	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Required. The language associated with the insight type. Each insight type is currently limited to a single language. If the same insight type is mapped to a different language, a new insight type is created.
InsightModel	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Required. The category of the insight type. Possible values are: • GENERATIVE—Generative • KEYWORD—Keyword • SITUATIONAL—Situational • TIME_BASED—Time-Based The default value is KEYWORD.
InsightOccurrenceCount	Type int Properties Filter, Group, Nillable, Sort Description The number of times a particular insight occurred in the transcript.
InsightSubject	Type string Properties Filter, Group, Nillable, Sort Description The specific text, phrase, or subject identified in the voice call transcript that serves as the basis for the insight.

Field	Details
InsightText	Type textarea Properties Nillable Description The text content of the insight derived from the voice call transcript.
Name	Type string Properties Filter, Group, idLookup, Nillable, Sort Description The name of the insight type.
Scope	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Required. The scope of the insight type. Possible values are: • Organization • User The default value is Organization.
VoiceCallId	Type reference Properties Filter, Group, Sort Description Required. ID of the associated parent VoiceCall. This field is a relationship field. Relationship Name VoiceCall Relationship Type Master-detail Refers To VoiceCall (the master object)

Field	Details
VoiceCallRecordingId	Type reference Properties Filter, Group, Nillable, Sort Description Required. ID of the associated parent VoiceCallRecording. This field is a relationship field. Relationship Name VoiceCallRecording Refers To VoiceCallRecording
VoiceCallTranscript	Type string Properties Filter, Group, Nillable, Sort Description Required. ID of the voice call transcript record associated with this insight.

VoiceCallInsightAction

Represents a suggested follow-up action derived from a voice call insight. VoiceCallInsightAction manages recommended steps—such as sending an email, creating a task, or scheduling a meeting—that address specific moments, including competitor mentions, pricing discussions, or objections. This object is available in API version 66.0 and later.

 **Note:** This object is available for Einstein Conversation Insights customers whose data is stored natively on the Salesforce Platform. If you turned on Einstein Conversation Insights for the first time starting in Spring '26, this object is available to query and access using Salesforce tools. For existing ECI customers, data migration and access to related Salesforce Platform objects is scheduled to begin in Summer '26.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

```
describeSObjects(), getDeleted(), getUpdated(), query(), retrieve()
```

Special Access Rules

Einstein Conversation Insight must be enabled and the user requires the Conversation Insights for Sales permission set.

Fields

Field	Details
ActionCategory	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The category that classifies the purpose of the action. Possible values are: - FollowUp - NeedsAttention
ActionReferenceId	Type reference Properties Filter, Group, Nillable, Sort Description Required. ID of the record associated with the generated action. This field is a relationship field. Relationship Name ActionReference Refers To VoiceCallInsightReason
ActionType	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The specific type of action to be performed for the insight. Possible values are: - CreateCalendarEvent - CreateTaskWithDate - EciCreateCallback - EciScheduleMeetings - EciSendCallResponse - ViewContactProfile The default value is CreateTaskWithDate.

Field	Details
CompletionDateTime	Type dateTime Properties Filter, Nillable, Sort Description Required. The timestamp when the action was completed.
Name	Type string Properties Filter, Group, idLookup, Sort Description The name of the insight action.
Status	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The status of the insight action. Possible values are: • Active • Completed The default value is Active.
VoiceCallInsightId	Type reference Properties Filter, Group, Sort Description Required. ID of the VoiceCallInsight record associated with a voice call. Each record represents the call insight of a specific recording or transcript within a call. This field is a relationship field. Relationship Name VoiceCallInsight Relationship Type Master-detail Refers To VoiceCallInsight (the master object)

VoiceCallInsightReason

Represents the voice call insight reason that contains the insight keyword, insight moments associated with a keyword, and the number of keyword occurrences. This object is available in API version 66.0 and later.

- **Note:** This object is available for Einstein Conversation Insights customers whose data is stored natively on the Salesforce Platform. If you turned on Einstein Conversation Insights for the first time starting in Spring '26, this object is available to query and access using Salesforce tools. For existing ECI customers, data migration and access to related Salesforce Platform objects is scheduled to begin in Summer '26.
- **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

Einstein Conversation Insight must be enabled and the user requires the Conversation Insights for Sales permission set.

Fields

Field	Details
Name	Typestring PropertiesFilter, Group, idLookup, Sort DescriptionThe name of the insight reason.
OccurrenceInfo	Typestring PropertiesFilter, Nillable, Sort DescriptionThe number of times the given keyword was mentioned in the call.
OccurrenceSnippet	Typetextarea PropertiesNillable

Field	Details
	Description The specific excerpt from the voice call transcript that helped generate the insight. Reserved for future use.
VoiceCallInsightId	Type reference Properties Filter, Group, Sort Description Required. ID of the VoiceCallInsight data associated with a voice call. Each record represents the call insight of a specific recording or transcript within a call. This field is a relationship field. Relationship Name VoiceCallInsight Relationship Type Master-detail Refers To VoiceCallInsight (the master object)

VoiceCallMetrics

Represents metrics for a VoiceCall lifecycle event, aggregated daily. This object is available in API version 56.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Fields

Field	Details
AverageSCVCallDuration	Type double Properties Filter, Nillable, Sort Description The average call duration, measured in minutes, for a given day.
AvgMessagesPerCall	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The average number of transcription messages per call for a given day.
InboundCallsAgentsConnected	Type int Properties Filter, Group, Nillable, Sort Description The number of inbound calls where agents connect with callers for a given day.
MaxMessagesPerCall	Type int Properties Filter, Group, Nillable, Sort Description The number of transcription messages for the call with the highest number of said messages for a given day.
MaxSCVCallDuration	Type double Properties Filter, Nillable, Sort Description The longest call duration, measured in minutes, for a given day.
MetricsDate	Type date Properties Filter, Group, Sort Description The date and time (in UTC) when the metric was gathered. For example, daily metrics jobs run at 12am local instance time (not UTC).
NumACWInitiated	Type int Properties Filter, Group, Nillable, Sort Description The number of calls where After Conversation Work (ACW) is initiated for a given day.

Field	Details
NumCallbackCallsCtrCompleted	Type int Properties Filter, Group, Nillable, Sort Description The number of callback calls where interactive voice response (IVR) data is fully and completely captured from a telephony provider for a given day.
NumInboundCallsCtrCompleted	Type int Properties Filter, Group, Nillable, Sort Description The number of inbound calls where interactive voice response (IVR) data is fully and completely captured from a telephony provider for a given day.
NumInboundIVRAbandonCalls	Type int Properties Filter, Group, Nillable, Sort Description The number of inbound calls where callers disconnected while waiting in the interactive voice response (IVR) system for a given day.
NumInboundQueueAbandonCalls	Type int Properties Filter, Group, Nillable, Sort Description The number of inbound calls where callers disconnected while waiting in the queue for a given day.
NumOutboundCallsCtrCompleted	Type int Properties Filter, Group, Nillable, Sort Description The number of outbound calls where interactive voice response (IVR) data is fully and completely captured from a telephony provider for a given day.
NumRecordedCalls	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The number of calls where the conversation between an agent and caller is recorded for a given day.
NumSCVCallbackCalls	Type int Properties Filter, Group, Nillable, Sort Description The number of callback calls for a given day.
NumSCVInboundCalls	Type int Properties Filter, Group, Nillable, Sort Description The number of inbound calls for a given day.
NumSCVOutboundCalls	Type int Properties Filter, Group, Nillable, Sort Description The number of outbound calls for a given day.
NumSCVTransferCalls	Type int Properties Filter, Group, Nillable, Sort Description The number of transfer calls for a given day.
NumTransferCallsCtrCompleted	Type int Properties Filter, Group, Nillable, Sort Description The number of transfer calls where interactive voice response (IVR) data is fully and completely captured from a telephony provider for a given day.

Field	Details
OutboundCallsAgentsConnected	Type int Properties Filter, Group, Nillable, Sort Description The number of outbound calls where an agent is connected with a caller for a given day.
TotalACWInboundMinutes	Type double Properties Filter, Nillable, Sort Description The total number of minutes agents spent in After Conversation Work (ACW) for inbound calls for a given day.
TotalACWOutboundMinutes	Type double Properties Filter, Nillable, Sort Description The total number of minutes agents spent in After Conversation Work (ACW) for outbound calls for a given day.
TotalAgentInboundMinutes	Type double Properties Filter, Nillable, Sort Description The total number of minutes agents spent talking to callers on inbound calls for a given day.
TotalHoldDurationMinutes	Type double Properties Filter, Nillable, Sort Description The number of minutes callers were put on hold for a given day.
TotalIVRInboundMinutes	Type double Properties Filter, Nillable, Sort

Field	Details
	Description The total number of minutes callers spent in the IVR system on inbound calls for a given day.
TotalMessages	Type int Properties Filter, Group, Nillable, Sort Description The total number of transcription messages for a given day.
TotalOutboundMinutes	Type double Properties Filter, Nillable, Sort Description The total number of minutes agents spent talking to callers on outbound calls for a given day.
TotalQueueInboundMinutes	Type double Properties Filter, Nillable, Sort Description For inbound calls, the total number of minutes callers spent in the queue waiting for a given day.

VoiceCallList

Represents a prioritized list of numbers to call.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only your Salesforce org's internal users can access this object.

Fields

Field Name	Details
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Whether the call list is active or not.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the call list.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the call list owner.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[VoiceCallListOwnerSharingRule](#)

Sharing rules are available for the object.

[VoiceCallListShare](#)

Sharing is available for the object.

VoiceCallListItem

Represents a single phone number in a prioritized call list.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`,
`undelete()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only your Salesforce org's internal users can access this object.

Fields

Field Name	Details
CallListId	Type reference Properties Create, Filter, Group, Sort Description The ID of the related call list.
Ordinal	Type int Properties Create, Filter, Group, Sort, Update Description The order of the item in the overall call list.
RelatedRecordId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the related record.
State	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Whether the call list item is not called, called, or skipped.

VoiceCallQualityFeedback

Represents feedback given by a Sales Dialer user about the quality of a [VoiceCall](#) .

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

Field Name	Details
FeedbackText	Type textarea Properties Nillable Description The detailed feedback about a call left by a user.
FeedbackType	Type string Properties Filter, Group, Nillable, Sort Description The feedback category (Call could not connect, Audio lagged, etc.) selected by a user.
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the user leaving the feedback.
VoiceCallId	Type reference Properties Filter, Group, Sort Description The ID of the related VoiceCall.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[VoiceCallQualityFeedbackOwnerSharingRule](#)

Sharing rules are available for the object.

VoiceCallQualityFeedbackShare

Sharing is available for the object.

VoiceCallRecording

Represents a call recording in Service Cloud Voice and Sales Dialer. Call recordings for Service Cloud Voice with Amazon Connect and for Service Cloud Voice with Partner Telephony from Amazon Connect are stored in S3 buckets on your Amazon Web Services (AWS) account and can be accessed via AWS. Call recordings for Sales Dialer are saved as files in Salesforce.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only your Salesforce org's internal users can access this object.

Fields

Field Name	Details
<code>DurationInSeconds</code>	Type int Properties Create, Filter, Group, Sort, Update Description The total length (in seconds) of the voice call recording. This value depends on which parameters are passed to the <code>PATCH /telephony/v1/voiceCalls/{CALL ID}</code> API. • If the <code>totalRecordingDuration</code> parameter is passed, then <code>DurationInSeconds = totalRecordingDuration</code>. • If the <code>agentInteractionDuration</code> and <code>totalHoldDuration</code> parameters are passed, then <code>DurationInSeconds = agentInteractionDuration + totalHoldDuration</code>. • If the <code>agentInteractionDuration</code>, <code>totalHoldDuration</code>, and <code>totalRecordingDuration</code> parameters are passed, then <code>DurationInSeconds = totalRecordingDuration</code>.
<code>IntelligenceScore</code>	Type int Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The intelligence score of the recording.
IsConsented	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Whether the call recording was indicated as consented or not.
MediaContentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the related media content, a ContentDocument. The record counts toward your org's file storage quota. This is a relationship field. Relationship Name MediaContent Relationship Type Lookup Refers To ContentDocument
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the call recording file.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of the call recording. This is a polymorphic relationship field. Relationship Name Owner

Field Name	Details
	Relationship Type Lookup
	Refers To Group, User
UploadDateTime	Type dateTime
	Properties Filter, Nillable, Sort
	Description The time and date that the recording was uploaded.
VoiceCallId	Type reference
	Properties Filter, Group, Sort
	Description Required. The ID of the related phone call. The property <code>nillable</code> has been removed in API version 50.0 and later. This is a relationship field.
	Relationship Name VoiceCall
	Relationship Type Lookup
	Refers To VoiceCall

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[VoiceCallRecordingChangeEvent](#) (API version 48.0)

Change events are available for the object.

[VoiceCallRecordingOwnerSharingRule](#)

Sharing rules are available for the object. Removed in API version 50.0 and later.

[VoiceCallRecordingShare](#)

Sharing is available for the object. Removed in API version 50.0 and later.

VoiceCoaching

Represents a call that is using call monitoring.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

As of Spring '20 and later, only your Salesforce org's internal users can access this object.

Fields

Field Name	Details
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the manager monitoring the call.
RelatedRecordId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the call list owner.
TraineeId	Type reference Properties Filter, Group, Sort, Unique Description The ID of the call list owner.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[VoiceCoachingOwnerSharingRule](#)

Sharing rules are available for the object.

VoiceCoachingShare

Sharing is available for the object.

VoiceLocalPresenceNumber

Represents a phone number with the same area code as the person who's being called.

Supported Calls

`query()`, `retrieve()`

Special Access Rules

As of Spring '20 and later, only your Salesforce org's internal users can access this object.

Fields

Field Name	Details
CountryCode	Type string Properties Filter, Group, idLookup, Sort Description The country code of the phone number.
LastUsedDate	Type dateTime Properties Filter, Nillable, Sort Description The date the phone number was last used.
PhoneNumber	Type phone Properties Filter, Group, Sort Description The local presence phone number.
Prefix	Type reference

Field Name	Details
	Properties Filter, Group, Sort
	Description The area code of the phone number.

VoiceMailContent

Represents a voicemail message left by a caller to the context user.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only your Salesforce org's internal users can access this object.

Fields

Field Name	Details
<code>DurationInSeconds</code>	Type int Properties Create, Filter, Group, Sort, Update Description The duration of the voicemail message in seconds.
<code>FirstHeardDateTime</code>	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The time and date when the user first listened to the voicemail message.
<code>MediaContentId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The ID of the related media content, a ContentDocument . The record counts toward your org's file storage quota.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the voicemail message.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of the voicemail message.
VoiceCallId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the related Dialer call.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[VoiceMailContentOwnerSharingRule](#)

Sharing rules are available for the object.

[VoiceMailContentShare](#)

Sharing is available for the object.

VoiceMailGreeting

Represents a custom greeting message that plays upon reaching a user's voicemail. This object is available in API version 41.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only your Salesforce org's internal users can access this object.

Fields

Field Name	Details
DurationInSeconds	Type int Properties Create, Filter, Group, Sort, Update Description The duration of the voicemail greeting message in seconds.
IsDefault	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Whether the greeting is the user's default greeting (<code>true</code>) or not (<code>false</code>).
MediaContentId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the related content document.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the voicemail greeting message.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the voicemail greeting message owner.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[VoiceMailGreetingOwnerSharingRule](#)

Sharing rules are available for the object.

[VoiceMailGreetingShare](#)

Sharing is available for the object.

VoiceMailMessage

Represents a prerecorded voicemail message.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only your Salesforce org's internal users can access this object.

Fields

Field Name	Details
<code>DurationInSeconds</code>	Type int Properties Create, Filter, Group, Sort, Update Description The duration of a prerecorded voicemail message in seconds.
<code>IsDefault</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Specifies whether the message is the context user's default voicemail drop message.
<code>MediaContentId</code>	Type reference Properties Create, Filter, Group, Sort, Update

Field Name	Details
	Description The ID of the file.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the prerecorded voicemail message.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the prerecorded voicemail message.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[VoiceMailMessageOwnerSharingRule](#)

Sharing rules are available for the object.

[VoiceMailMessageShare](#)

Sharing is available for the object.

VoiceOrgSetting

Represents the org's customized voice settings. This object is available in API version 46.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
ConsentMessage	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description A custom message displayed for recording consent. Available in API version 49.0 and later.
CustomDisposition	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description If set, this field identifies which custom field in the Activity object is used as the call dispositions picklist. Possible values are: • AccountContactRole • AccountOwnership • AccountRating • AccountType • AgeOver • AssetRelationshipType • AssetStatus • AssociatedLocationType • BuyerAttributes • CampaignMemberStatus • CaseContactRole • CaseOrigin • CasePriority • CaseReason • CaseStatus • CaseType • ComplianceGroup • ConsequenceOfFailure • ContactPointAddressType • ContactPointUsageType • ContactRequestReason • ContactRequestRequestedChannel • ContactRequestStatus • ContactRole • ContractContactRole

Field	Details
	- ContractStatus - DataImportRefreshHours - DataModelSupplierType - DigitalAssetStatus - EventSubject - EventType - ExceptionType - FieldBusinessStatus - FieldClassification - FiscalYearPeriodName - FiscalYearPeriodPrefix - FiscalYearQuarterName - FiscalYearQuarterPrefix - FlowEnvironment - ForecastCategoryName - ForecastingItemCategory - GenderIdentity - IdeaMultiCategory - IdeaStatus - Industry - LeadSource - LeadStatus - LocationType - MilitaryService - OpportunityCompetitor - OpportunityStage - OpportunityType - OrderStatus - OrderType - OrgMetricCategory - OrgMetricErrorMessage - OrgMetricImpleEffort - OrgMetricStatus - OrgMetricType - PartnerRole - ProcessExceptionCategory - ProcessExceptionPriority - ProcessExceptionSeverity

Field	Details
	• ProcessExceptionStatus • Product2Family • Pronoun • QuantityUnitOfMeasure • QuickTextCategory • QuickTextChannel • SalesEngagementActivityType • SalesTeamRole • Salutation • ScorecardMetricCategory • SecurityClassification • SocialPostClassification • SocialPostEngagementLevel • SocialPostReviewedStatus • SolutionStatus • StatusReason • TaskPriority • TaskStatus • TaskSubject • TaskType • WorkOrderLineItemStatus • WorkOrderPriority • WorkOrderStatus
DefaultDisposition	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Identifies which picklist value set is used as default for call dispositions. Possible values are: • AccountContactRole • AccountOwnership • AccountRating • AccountType • AgeOver • AssetRelationshipType • AssetStatus

Field	Details
	- AssociatedLocationType - BuyerAttributes - CampaignMemberStatus - CaseContactRole - CaseOrigin - CasePriority - CaseReason - CaseStatus - CaseType - ComplianceGroup - ConsequenceOfFailure - ContactPointAddressType - ContactPointUsageType - ContactRequestReason - ContactRequestRequestedChannel - ContactRequestStatus - ContactRole - ContractContactRole - ContractStatus - DataImportRefreshHours - DataModelSupplierType - DigitalAssetStatus - EventSubject - EventType - ExceptionType - FieldBusinessStatus - FieldClassification - FiscalYearPeriodName - FiscalYearPeriodPrefix - FiscalYearQuarterName - FiscalYearQuarterPrefix - FlowEnvironment - ForecastCategoryName - ForecastingItemCategory - GenderIdentity - IdeaMultiCategory - IdeaStatus - Industry

Field	Details
	- LeadSource - LeadStatus - LocationType - MilitaryService - OpportunityCompetitor - OpportunityStage - OpportunityType - OrderStatus - OrderType - OrgMetricCategory - OrgMetricErrorMessage - OrgMetricImplEffort - OrgMetricStatus - OrgMetricType - PartnerRole - ProcessExceptionCategory - ProcessExceptionPriority - ProcessExceptionSeverity - ProcessExceptionStatus - Product2Family - Pronoun - QuantityUnitOfMeasure - QuickTextCategory - QuickTextChannel - SalesEngagementActivityType - SalesTeamRole - Salutation - ScorecardMetricCategory - SecurityClassification - SocialPostClassification - SocialPostEngagementLevel - SocialPostReviewedStatus - SolutionStatus - StatusReason - TaskPriority - TaskStatus - TaskSubject - TaskType

Field	Details
	• <code>WorkOrderLineItemStatus</code> • <code>WorkOrderPriority</code> • <code>WorkOrderStatus</code>
<code>DeveloperName</code>	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters and must be unique in your organization. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores.
<code>Language</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the MasterLabel.
<code>MasterLabel</code>	Type string Properties Create, Filter, Group, Sort, Update Description The label of the voice org setting.

VoiceUserLine

Represents a user's forwarding phone number.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only your Salesforce org's internal users can access this object.

Fields

Field Name	Details
IsCustomCallerId	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the number is a custom caller ID (<code>true</code>) or not (<code>false</code>).
IsVerified	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Reserved for future use.
Name	Type string Properties Create, Filter, Group, idLookup, Sort Description The name of the phone number.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who owns the phone number.
PhoneNumber	Type phone Properties Create, Filter, Group, Sort, Update Description The user's phone number.
UserId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the user using the phone number.
VendorVerifiedCallerIdKey	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description The ID for a custom phone number provided by the Sales Dialer service provider.
VoiceVendorInfoId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the related Sales Dialer service provider.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[VoiceUserLineOwnerSharingRule](#)

Sharing rules are available for the object.

[VoiceUserLineShare](#)

Sharing is available for the object.

VoiceUserPreferences

Represents the number the user displays when making outbound calls. This object is available in API version 41.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`,
`undelete()`, `update()`, `upsert()`

Special Access Rules

As of Spring '20 and later, only your Salesforce org's internal users can access this object.

Fields

Field Name	Details
CallerIdType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The number displayed for outbound calls. The possible values are: • VendorLine • CompanyNumber • LocalPresence • CustomCallerId
DeskPhoneNumber	Type phone Properties Create, Filter, Group, Nillable, Sort, Update Description A separate phone number users can utilize as part of a call bridge.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the phone number owner.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[VoiceUserPreferencesOwnerSharingRule](#)

Sharing rules are available for the object.

[VoiceUserPreferencesShare](#)

Sharing is available for the object.

VoiceVendorInfo

Represents information about the Service Cloud Voice or Sales Dialer provider's vendor.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

As of Spring '20 and later, only your Salesforce org's internal users can access this object.

Fields

Field Name	Details
CorporateNumber	Type phone Properties Filter, Group, Nillable, Sort Description The standard number that users can choose to display when making outgoing calls.
IsActive	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Specifies whether the vendor is active or not.
LocalPresenceDefaultNumber	Type phone Properties Filter, Group, Nillable, Sort Description The default routing number that's available for incoming local presence calls.
TenantConfigVersion	Type string Properties Filter, Group, Nillable, Sort Description The version of the Service Cloud Voice tenant configuration. Available in API version 51.0 and later.
VendorAccountKey	Type string

Field Name	Details
	Properties Filter, Group, idLookup, Sort Description The account key of the vendor.
VendorProviderName	Type string Properties Filter, Group, Sort Description The name of the vendor.
VendorType	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The name of the telephony vendor.

VoiceVendorLine

Represents a user's phone number reserved with the vendor.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

As of Spring '20 and later, only your Salesforce org's internal users can access this object.

Fields

Field Name	Details
CallUsageInSecondsLastMonth	Type int Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description An org's total call usage last month in seconds.
OwnerId	Type reference Properties Filter, Group, Sort Description The ID of the user who owns the phone number. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PhoneNumber	Type phone Properties Filter, Group, idLookup, Sort Description The unique vendor phone number.
ShouldRecord	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Reserved for future use.
Status	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Specifies whether the number is currently active or released.
UserId	Type reference

Field Name	Details
	Properties Filter, Group, Nillable, Sort
	Description The ID of the user using the phone number. This is a relationship field.
	Relationship Name User
	Relationship Type Lookup
	Refers To User
VoiceVendorInfoId	Type reference
	Properties Filter, Group, Sort
	Description The ID of the Dialer vendor. This is a relationship field.
	Relationship Name VoiceVendorInfo
	Relationship Type Lookup
	Refers To VoiceVendorInfo

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[VoiceVendorLineOwnerSharingRule](#)

Sharing rules are available for the object.

[VoiceVendorLineShare](#)

Sharing is available for the object.

Vote

Represents a vote that a user has made on a Knowledge Article, Idea, or Reply.



Note: In API version 16.0 and earlier, SOQL queries on the Vote object only return votes for the Idea object. Starting in API version 17.0, SOQL queries return votes for both Idea and Reply.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

As of Summer '20 and later, only authenticated internal and external users can access this object.

Voting on Knowledge articles is available only when Knowledge is enabled.

Fields

Field	Details
<code>IsDeleted</code>	Type boolean Properties Defaulted on create, Filter Description Indicates whether the object has been moved to the Recycle Bin (<code>true</code>) or not (<code>false</code>). Label is Deleted.
<code>LastModifiedById</code>	Type reference Properties Defaulted on create, Filter, Group, Sort Description ID of the user most recently associated with this vote.
<code>LastModifiedDate</code>	Type dateTime Properties Defaulted on create, Filter, Sort Description The datetime when this vote was last modified.
<code>ParentId</code>	Type reference Properties Group, Sort, Create, Filter Description ID of the Knowledge Article, Idea, or Reply associated with this vote. This is a polymorphic relationship field.

Field	Details
	Relationship Name Parent
	Relationship Type Lookup
	Refers To Idea, IdeaComment, KnowledgeArticle, Solution
Type	Type picklist
	Properties Group, Sort, Create, Filter, Restricted picklist, Update
	Description Picklist that indicates the type of vote. The value <code>Up</code> indicates that the vote is a user's positive endorsement of the associated idea or reply. The value <code>Down</code> indicates that the vote is a user's negative endorsement of the associated idea or reply.



Note: If you are importing Vote data into Salesforce and need to set the value for an audit field, such as `CreatedDate`, contact Salesforce. Audit fields are automatically updated during API operations unless you request to set these fields yourself..

Usage

For Knowledge Articles, one vote record is inserted per user per Knowledge Article. Voting for another article version overrides the vote for the previous version.

In version 12.0 and later, use this object to track the votes that users made on ideas. For more information on ideas, see “Understand and Work with Ideas” in the Salesforce Help .

In version 17.0 and later, you must filter using the following syntax when querying this object in a SOQL query: `ParentId = single ID`, `Parent.Type = single type`, `Id = single ID`, or `Id IN (list of IDs)`. See Comparison Operators in the [Salesforce SOQL and SOSL Reference Guide](#) for a sample query.

A SOQL query must filter using one of the following Parent or Id clauses.

- `ParentId = [single ID]`
- `Parent.Type = [single type]`
- `Id = [single ID]`
- `Id IN = [list of IDs]`

SEE ALSO:

[Idea](#)

[IdeaComment](#)

WarrantyTerm

Represents warranty terms defining the labor, parts, and expenses covered, along with any exchange options, provided to rectify issues with products. This object is available in API version 50.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
Code	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A code or other identifier associated with this warranty term.
Description	Type textarea Properties Create, Nillable, Update Description Description of the warranty term.
EffectiveStartDate	Type picklist Properties Create, Filter, Group, Sort, Update Description Date on which the warranty term became available for use. Possible values are: • InstallDate • ManufactureDate • PurchaseDate
ExchangeType	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The type of exchange offered. Possible values are: • AdvanceExchange • Loaner • ReturnExchange
Exclusions	Type textarea Properties Create, Nillable, Update Description Description of any exclusions.
ExpensesCovered	Type percent Properties Create, Filter, Nillable, Sort, Update Description The percentage of expenses covered.
ExpensesCoveredDuration	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The duration for which expenses are covered.
ExpensesCoveredUnitOfTime	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The unit in which expenses covered duration is measured. Possible values are: • Days • Months • Weeks • Years

Field	Details
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Defines whether the warranty term is active.
IsTransferable	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Defines whether the warranty can be transferred to a new owner.
LaborCovered	Type percent Properties Create, Filter, Nillable, Sort, Update Description The percentage of labor covered.
LaborCoveredDuration	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The duration for which labor is covered.
LaborCoveredUnitOfTime	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The unit in which labor covered duration is measured. Possible values are: • Days • Months • Weeks • Years

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the warranty term was last modified. Its label in the user interface is <code>Last Modified Date</code>.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the warranty term was last viewed.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The warranty term's assigned owner.
PartsCovered	Type percent Properties Create, Filter, Nillable, Sort, Update Description The percentage of parts covered.
PartsCoveredDuration	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The duration for which parts are covered.
PartsCoveredUnitOfTime	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description The unit in which parts covered duration is measured. Possible values are: • Days • Months • Weeks • Years
Pricebook2Id	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the price book item associated with this warranty term.
WarrantyDuration	Type int Properties Create, Filter, Group, Sort, Update Description The duration of the warranty offered by this term.
WarrantyTermName	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the warranty term.
WarrantyType	Type picklist Properties Create, Filter, Group, Sort, Update Description The type of warranty. Possible values are: • Repair • Standard • Supplier

Field	Details
WarrantyUnitOfTime	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The unit in which the warranty duration is measured. Possible values are: • Days • Months • Weeks • Years

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

WarrantyTermChangeEvent

Change events are available for the object.

WaveAutoInstallRequest

Provides access to the concrete object that represents a CRM Analytics auto-install request. The auto-install request tracks the progress of CRM Analytics applications created from CRM Analytics templates by the automated process user. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

CRM Analytics must be enabled in your org. A user must have the Auto Install permission enabled.

Fields

Field	Details
Configuration	Type textarea

Field	Details
	Properties Create, Nillable Description CRM Analytics application configuration for the auto-install request.
FailedReason	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description If the CRM Analytics application fails to complete successfully, this value indicates why the failure occurred. Values can be: • OrganizationIncompatible: the org didn't pass the template compatibility checks. • AppInstallationSkipped: the org didn't pass the template compatibility checks and was skipped. • RetriesExhausted: the request exhausted the maximum number of retries. • RequestCancelled: the user canceled the request. • AppCreateFailure: the app or folder creation failed. Check the request log and try again. • AppUpdateFailure: the app or folder update failed. Check the request log and try again. • AppConstructionFailure: the app or folder construction failed. Check the request log and try again. • WaveDisabled: the org doesn't have the Wave org permission or preference enabled. Check the licenses for CRM Analytics and try again. • CancelFailed: canceling an in-progress app failed. Check the request log and try again. • DeleteFailed: deleting an app failed. Check the request log and try again. • DependencyFailure: a dependent auto-install request failed. Check App Install History and try again. • DependencyCancelled: the user canceled a dependent auto-install request. Check App Install History and try again. • FailedToEnqueue: the request failed to enqueue. Check the request log and try again. • FailedOther: the request failed for another reason. Check the request log and try again.
FolderId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort Description The ID of the CRM Analytics application created by the auto-install request. This is a relationship field. Relationship Name Folder Relationship Type Lookup Refers To Folder
IsLocked	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates if the auto-install request is locked or not.
MayEdit	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates if the auto-install request can be edited or not.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the auto-install request, provided at creation by the user.
RequestLog	Type textarea Properties Create, Nillable, Update Description A log of the auto-install progress and completion results.

Field	Details
RequestStatus	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The status of the auto-install request. Values can be New, Enqueued, Cancelled, In Progress, AppInProgress, Failed, and Success.
RequestType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The type of auto-install request. Values can be WaveEnable, OrgCompatibilityCheck, WaveAppCreate, WaveAppUpdate, WaveAppDelete, and StartDataflow.
TemplateApiName	Type string Properties Create, Filter, Group, Nillable, Sort Description The API name of the CRM Analytics template to create the CRM Analytics app from.
TemplateVersion	Type string Properties Create, Filter, Group, Nillable, Sort Description The version of the CRM Analytics template to create the CRM Analytics app from.

Usage

Use this object to query and create auto-install requests for CRM Analytics applications in your org. This object is useful to troubleshoot issues with templated applications that the automated process user creates.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[WaveAutoInstallRequestChangeEvent](#) (API version 62.0)

Change events are available for the object.

WebCart

Represents an online shopping cart for a store built with B2B Commerce or D2C Commerce, with total amounts for products, shipping and handling, and taxes. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The WebCart object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the account that owns this <code>WebCart</code>. In API version 51.0 and later, if the <code>WebCart</code> was created through Guest Browsing, this ID is the ID of the <code>GuestBuyerProfile</code>. This field is a polymorphic relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
BillingAddress	Type address Properties Filter, Nillable Description The mailing address to which this <code>WebCart</code> is billed.
BillingCity	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The city of the billing address.
BillingCountry	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The country of the billing address.
BillingGeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The accuracy rating of the geocode for the billing address. Possible values are: • Address • Block • City • County • ExtendedZip • NearAddress • Neighborhood • State • Street • Unknown • Zip
BillingLatitude	Type double Properties Create, Filter, Nillable, Sort, Update Description The latitude of the geocode for the billing address.
BillingLongitude	Type double

Field	Details
	Properties Create, Filter, Nillable, Sort, Update Description The longitude of the geocode for the billing address.
BillingPostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The postal code for the billing address.
BillingState	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The state of the billing address.
BillingStreet	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The street of the billing address. Enter up to 255 characters.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The ISO code for the currency that's specified on the buyer's account. Default value is USD. Possible values are: • EUR—Euro • USD—U.S. Dollar  Note: Although this field is Nillable, if you want to use Commerce Webstore Cart Promotions with multi-currency enabled, this field is required.
GrandTotalAmount	Type currency

Field	Details
	Properties Filter, Nillable, Sort Description Sum of all cart items' TotalAmount, or WebCart TotalAmount plus WebCart TotalTaxAmount. This value includes all taxes and adjustments.
GuestCompanyName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Company name associated with a delivery for a guest customer. This field is available in API version 59.0 and later.
GuestEmailAddress	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description The email address of a guest buyer. This field is available in API version 52.0 and later.
GuestFirstName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The first name of a guest buyer. This field is available in API version 52.0 and later.
GuestLastName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The last name (or surname) of a guest buyer. This field is available in API version 52.0 and later.
GuestPhoneNumber	Type phone

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The phone number of a guest buyer. This field is available in API version 52.0 and later.
GuestSecondName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The second name of a guest buyer. This field is available in API version 52.0 and later.
InitialOrderReferenceNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A unique identifier assigned to the WebCart at the beginning of the checkout process. Initially populated when the checkout process is initiated, the <code>InitialOrderReferenceNumber</code> is then associated with the order created when the checkout is complete. This field is available in API version 61.0 and later.
InventoryReservationIdentifier	Type string Properties Filter, Group, Nillable, Sort Description Reserved for future use. This field is available in API version 57.0 and later.
IsRepricingNeeded	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Whether the cart has changed since the last repricing. The default value is false.

Field	Details
IsSecondary	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Whether the cart is a secondary cart or a primary cart. This field is available in API version 52.0 and later.
LastRepricingDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description Date when the last repricing was done.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of this <code>WebCart</code> record. <code>Name</code> can be up to 255 characters.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of this <code>WebCart</code>. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PaymentGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The ID of the <code>WebCart</code> payment group. This field is a relationship field. Relationship Name PaymentGroup Relationship Type Lookup Refers To PaymentGroup
PaymentMethodId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The method of payment for this <code>WebCart</code>. This field is a polymorphic relationship field. Relationship Name PaymentMethod Relationship Type Lookup Refers To AlternativePaymentMethod, CardPaymentMethod, DigitalWallet
PoNumber	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The purchase order number. Enter up to 80 characters.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The status of this <code>WebCart</code>. Possible values are: • Active—Cart is created and available for modifications, like adding or removing products or promotions. • Checkout—Cart is in checkout. If the customer modifies the cart, the current checkout session is canceled.

Field	Details
	• Closed—Checkout is complete and an order was created. The cart cannot be modified. • PendingClosed—Cart is marked to be closed, but the request isn't completed yet. The cart can't be modified. This value is available in API version 57.0 and later. • PendingDelete—Cart is marked for delete, but the request isn't completed yet. The cart can't be modified. • Processing—Cart is processing. For example, taxes are being calculated. The cart can't be modified.
TaxLocaleType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of tax locale. Possible values are: • Net • Gross This field is available in API versions 52.0 to 54.0.
TaxType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of tax policy. Possible values are: • Automatic • Net • Gross This field is available in API version 55.0 and later.
TotalAdjustmentAmount	Type currency Properties Defaulted on create, Filter, Nillable, Sort Description A calculated field that reflects the total of all adjustments to the cart subtotal. Adjustments include item, tier, and cart level discounts.
TotalAmount	Type currency Properties Filter, Nillable, Sort

Field	Details
	Description The sum of all cart items' <code>TotalPrice</code>, or <code>TotalProductAmount</code> plus <code>TotalChargeAmount</code>. If the store tax type is Gross, the sum includes taxes.  Note: Although this field is Nillable, if you want to use Commerce Webstore Cart Promotions, this field is required and must have a value greater than or equal to zero (0).
<code>TotalAmountAfterAllAdjustments</code>	Type currency Properties Filter, Nillable, Sort Description The sum of all cart items after all price adjustments are applied. Adjustments include various types of discounts. This field is available in API version 52.0 and later.
<code>TotalCartLevelAdjAmount</code>	Type currency Properties Defaulted on create, Filter, Nillable, Sort Description Total cart level discount amount for the cart. This field is available in API version 61.0 and later.
<code>TotalChargeAmount</code>	Type currency Properties Defaulted on create, Filter, Nillable, Sort Description The sum of all cart items' <code>TotalPrice</code> for cart items of the type <code>Charge</code>.
<code>TotalChargeTaxAmount</code>	Type currency Properties Defaulted on create, Filter, Nillable, Sort Description The sum of all the cart items' <code>TotalTaxAmount</code> for cart items of the type <code>Charge</code>.
<code>TotalLineItemsWithErrors</code>	Type int

Field	Details
	Properties Defaulted on create, Filter, Group, Nillable, Sort Description A calculated field that shows the total number of cart line items of type <code>Product</code> with errors. This field is available in API version 50.0 and later.
<code>TotalListAmount</code>	Type currency Properties Defaulted on create, Filter, Nillable, Sort Description Sum of all the cart items' <code>TotalListPrice</code>.
<code>TotalProductAmount</code>	Type currency Properties Defaulted on create, Filter, Nillable, Sort Description The sum of all the cart items' <code>TotalPrice</code> for cart items of the type <code>Product</code>.
<code>TotalProductCount</code>	Type double Properties Defaulted on create, Filter, Nillable, Sort Description A count of all the products in the <code>WebCart</code>.
<code>TotalProductItemAdjAmount</code>	Type currency Properties Defaulted on create, Filter, Nillable, Sort Description Total item level discount amount for the cart. This field is available in API version 61.0 and later.
<code>TotalProductLineItemCount</code>	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort

Field	Details
	Description A calculated field that shows the total number of cart line items of type <code>Product</code>. This field is available in API version 60.0 and later.
<code>TotalProductListAmount</code>	Type currency Properties Defaulted on create, Filter, Nillable, Sort Description The sum of all the cart items' <code>TotalListAmount</code> for the <code>CartItem</code> type <code>Product</code>. This field is available in API version 59.0 and later.
<code>TotalProductTaxAmount</code>	Type currency Properties Defaulted on create, Filter, Nillable, Sort Description The sum of all the cart items' <code>TotalTaxAmount</code> for the <code>CartItem</code> type <code>Product</code>.
<code>TotalPromoAdjustmentAmount</code>	Type currency Properties Defaulted on create, Filter, Nillable, Sort Description The total of all item discounts related to product promotions. This field is available in API version 52.0 and later.
<code>TotalPromoAdjustmentTaxAmount</code>	Type currency Properties Defaulted on create, Filter, Nillable, Sort Description The total tax adjustment for all item discounts related to product promotions. This field is available in API version 52.0 and later.
<code>TotalTaxAmount</code>	Type currency Properties Filter, Nillable, Sort

Field	Details
	Description The sum of all cart items' <code>TotalTaxAmount</code> , or <code>TotalProductTaxAmount</code> plus <code>TotalDeliveryTaxAmount</code> .
Type	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The <code>WebCart</code> type. Default value is <code>Cart</code> . Possible values are: • <code>Cart</code> • <code>PayNowReadOnly</code> • <code>ReadOnly</code> • <code>Template</code>
UniqueProductCount	Type int Properties Defaulted on create, Filter, Group, Nillable, Sort Description The count of unique product SKUs in the <code>WebCart</code> .
WebStoreId	Type reference Properties Create, Filter, Group, Sort, Update Description The store ID related to this <code>WebCart</code> . This field is a relationship field. Relationship Name WebStore Relationship Type Lookup Refers To WebStore

Usage Notes

- In a B2B Commerce for Lightning store, customers who created custom components for adding items to carts noticed that, after adding items, the cart badge didn't refresh. A hard refresh causes the value to properly update.

Associated Objects

This object has the following associated objects. Unless it's noted, associated objects are available in the same API version as this object.

WebCartChangeEvent (API version 58.0)

Change events are available for the object.

WebCartHistory

History is available for tracked fields of the object.

WebCartOwnerSharingRule

Sharing rules are available for the object.

WebCartShare

Sharing is available for the object.

SEE ALSO:

- [Commerce Webstore Cart Promotions](#)
- [Commerce Webstore Promotions, Associate Action](#)
- [Commerce Webstore Promotions, Execute Action](#)
- [Salesforce DX Developer Guide: Get Started with Scratch Org](#)

WebCartAdjustmentBasis

Coupons that trigger promotions for the cart. When a customer tries to add a coupon to the cart, the store looks for promotions associated with the coupon. If a promotion results in a price adjustment, a WebCartAdjusmentBasis record is created. This object is available in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
AdjustmentBasisDetail	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Coupon code for the coupon associated with the promotion.

Field	Details
AdjustmentBasisReferenceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Foreign key reference to the coupon. This field is a relationship field. Relationship Name AdjustmentBasisReference Relationship Type Lookup Refers To Coupon
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The currency ISO code of the cart. Possible values are: • EUR • USD The default value is USD.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the WebCartAdjustmentBasis record.
WebCartId	Type reference Properties Create, Filter, Group, Sort Description ID of the cart. This field is a relationship field.

Field	Details
	Relationship Name WebCart
	Relationship Type Lookup
	Refers To WebCart

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

WebCartAdjustmentBasisChangeEvent on page 68

Change events are available for the object.

WebCartAdjustmentGroup

Group of price adjustments for a cart. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The WebCartAdjustmentGroup object is available only if the B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
AdjustmentSource	Type picklist
	Properties Create, Filter, Group, Restricted picklist, Sort, Update
	Description Price adjustment type. Possible values are: • Discretionary • Promotion

Field	Details
	System
AdjustmentTargetType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Target for the price adjustment (the cart itself or individual items). Possible values are: - Cart - Item
AdjustmentType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Indicates if the price adjustment is applied as percentage or an absolute amount. Possible values are: - AdjustmentAmount - AdjustmentPercentage
AdjustmentValue	Type double Properties Create, Filter, Sort, Update Description Numeric value of the adjustment (for example, 10 if the price adjustment is either 10% off or \$10 off).
CartId	Type reference Properties Create, Filter, Group, Sort Description ID of the cart to which the price adjustment belongs. This is a relationship field. Relationship Name Cart Relationship Type Lookup

Field	Details
	Refers To WebCart
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The ISO code for the currency that's specified on the buyer's account. Default value is USD. Possible values are: - EUR—Euro - USD—U.S. Dollar
Description	Type textarea Properties Create, Nillable, Update Description Description of the adjustment group.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the adjustment group.
PriceAdjustmentCauseId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of entity that caused this adjustment (for example, a promotion ID). If unspecified, then <code>Description</code> populates the display name. This is a relationship field. Relationship Name PriceAdjustmentCause Relationship Type Lookup Refers To Promotion

Field	Details
Priority	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description If there are multiple price adjustments, sequence in which the price adjustments are applied.
TaxAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description Tax on the total adjusted price.
TotalAmount	Type currency Properties Create, Filter, Nillable, Sort, Update Description Total price after adjustments.
TotalAmountWithTax	Type currency Properties Filter, Nillable, Sort Description Total adjusted price plus tax.

Associated Objects

This object has the following associated objects. Unless it's noted, associated objects are available in the same API version as this object.

[WebCartAdjustmentGroupChangeEvent](#) (API version 58.0)

Change events are available for the object.

WebCartHistory

WebCartHistory represents the history of changes to the values in the fields of the `WebCart` object.

For specific version information, see the documentation for `WebCart`.

Supported Calls

`describeSObjects()`, `query`, `replicate`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Special Access Rules

For specific special access rules, if any, see the documentation for `WebCart`.

Fields

Field Name	Details
<code>DataType</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Data type of the field that was changed.
<code>Field</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Name of the field that was changed.
<code>NewValue</code>	Type anyType Properties Nillable, Sort Description New value of the field that was changed.
<code>OldValue</code>	Type anyType Properties Nillable, Sort Description Old value of the field that was changed.
<code>WebCartId</code>	Type reference

Field Name	Details
	Properties Filter, Group, Sort
	Description The unique ID of the WebCart.

WebLink

Represents a custom link to a URL or Scontrol.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

- To create a custom link, the client application must be logged in with the “Customize Application” permission.
- Customer Portal users can’t access this object.

Fields

Field Name	Details
Availability	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description Description of the custom link. Limit is 1,000 characters.
DisplayType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Field Name	Details
	Description Type of display: button, link, or mass-action button.
EncodingKey	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. Encoding of parameters on the URL link.
HasMenubar	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the popup window shows a menu bar (<code>true</code>) or not (<code>false</code>).
HasScrollbars	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the popup window shows scroll bars (<code>true</code>) or not (<code>false</code>).
HasToolbar	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the popup window shows browser toolbars (<code>true</code>) or not (<code>false</code>). Toolbars normally contain navigation buttons like Back, Forward, and Print.
Height	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Height of the popup in pixels.
IsProtected	Type boolean

Field Name	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the object is protected (<code>true</code>) or not (<code>false</code>). Protected components that have been installed in other organizations can't be linked to or referenced by components created in the subscriber organization. A developer can easily delete a protected component contained in a managed package in a future release of the package without worrying about failing installations. However, once a component is marked as unprotected and is released globally, the developer can't delete it.
IsResizable	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether users are allowed to resize the popup window (<code>true</code>) or not (<code>false</code>).
LinkType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. Type of link (S-control or URL).
MasterLabel	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Master label for the link. Limit is 240 characters. This display value is the internal label that is not translated.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Name to display on page.

Field Name	Details
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <i>namespacePrefix__componentName</i> notation. The namespace prefix can have one of the following values. • In Developer Edition orgs, NamespacePrefix is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer. • In orgs that are not Developer Edition orgs, NamespacePrefix is set only for objects that are part of an installed managed package. All other objects have no namespace prefix. This field can't be accessed unless the logged-in user has the Customize Application permission.
OpenType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Required. How the custom link opens when clicked in a browser—NewWindow, Sidebar, or NoSidebar.
PageOrObjectType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description Required. For standard objects, the name of the page on which to display the custom link. For custom objects, the name of the object.
Position	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field Name	Details
	Description Location on the screen where the popup should open—TopLeft, FullScreen, or None.
RequireRowSelection	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the custom link requires a row selection (<code>true</code>) or not (<code>false</code>).
ScontrolId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the custom s-control object (Scontrol) to link to. Can include fields as tokens within the custom s-control object. Label is Custom S-Control ID .
ShowsLocation	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the popup window shows the browser's address bar containing the URL (<code>true</code>) or not (<code>false</code>).
ShowsStatus	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Show the status bar at the bottom of the browser.
Url	Type textarea Properties Create, Nillable, Update Description Required. URL of the page to link to. Can include fields as tokens within the URL. Limit: 1,024 KB.

Field Name	Details
Width	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Width of the popup in pixels.

Usage

Use this object to programmatically manage custom links, which allow client applications to integrate data with external URLs, an organization's intranet, or other back-end office systems. A custom link can point to:

- An external URL, such as `www.google.com` or your company's intranet.
- A custom s-control, such as a Java applet or Active-X control.

Custom links can include fields as tokens within the URL or custom s-control.

SEE ALSO:

[Scontrol](#)

WebLinkLocalization

Represents the translated value of the field label for a custom link to a URL or s-control when the Translation Workbench is enabled for your organization.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

- Your organization must be using Professional, Enterprise, Developer, Unlimited, or Performance Edition and be enabled for the Translation Workbench.
- To view this object, you must have the "View Setup and Configuration" permission.

Fields

Field	Details
LanguageLocaleKey	Type picklist

Field	Details
	Properties Create, Filter, Nillable, Restricted picklist Description This field is available in API version 16.0 and earlier. It is the same as the <code>Language</code> field.
Language	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description This field is available in API version 17.0 and later. The combined language and locale ISO code, which controls the language for labels displayed in an application. This picklist contains the following fully-supported languages: - Chinese (Simplified): <code>zh_CN</code> - Chinese (Traditional): <code>zh_TW</code> - Danish: <code>da</code> - Dutch: <code>nl_NL</code> - English: <code>en_US</code> - Finnish: <code>fi</code> - French: <code>fr</code> - German: <code>de</code> - Italian: <code>it</code> - Japanese: <code>ja</code> - Korean: <code>ko</code> - Norwegian: <code>no</code> - Portuguese (Brazil): <code>pt_BR</code> - Russian: <code>ru</code> - Spanish: <code>es</code> - Spanish (Mexico): <code>es_MX</code> Spanish (Mexico) defaults to Spanish for customer-defined translations. - Swedish: <code>sv</code> - Thai: <code>th</code> The Salesforce user interface is fully translated to Thai, but Help is in English. The following end-user only languages are available. - Arabic: <code>ar</code> - Bulgarian: <code>bg</code> - Croatian: <code>hr</code> - Czech: <code>cs</code>

Field	Details
	- English (UK): en_GB - Greek: el - Hebrew: iw - Hungarian: hu - Indonesian: in - Polish: pl - Portuguese (European): pt_PT - Romanian: ro - Slovak: sk - Slovenian: sl - Turkish: tr - Ukrainian: uk - Vietnamese: vi The following platform languages are available for organizations that use Salesforce exclusively as a platform. - Albanian: sq - Afrikaans: af - Amharic: am - Arabic (Algeria): ar_DZ - Arabic (Bahrain): ar_BH - Arabic (Egypt): ar_EG - Arabic (Iraq): ar_IQ - Arabic (Jordan): ar_JO - Arabic (Kuwait): ar_KW - Arabic (Lebanon): ar_LB - Arabic (Libya): ar_LY - Arabic (Morocco): ar_MA - Arabic (Oman): ar_OM - Arabic (Qatar): ar_QA - Arabic (Saudi Arabia): ar_SA - Arabic (Sudan): ar_SD - Arabic (Syria): ar_SY - Arabic (Tunisia): ar_TN - Arabic (United Arab Emirates): ar_AE - Arabic (Yemen): ar_YE - Armenian: hy - Basque: eu - Bosnian: bs

Field

Details

- Bengali: bn
- Burmese: my
- Catalan: ca
- Chinese (Hong Kong): zh_HK
- Chinese (Singapore): zh_SG
- Chinese (Malaysia): zh_MY
- Dutch (Belgium): nl_BE
- English (Australia): en_AU
- English (Belgium): en_BE
- English (Canada): en_CA
- English (Cyprus): en_CY
- English (Germany): en_DE
- English (Hong Kong): en_HK
- English (India): en_IN
- English (Ireland): en_IE
- English (Israel): en_IL
- English (Malaysia): en_MY
- English (Malta): en_MT
- English (Netherlands): en_NL
- English (New Zealand): en_NZ
- English (Philippines): en_PH
- English (Singapore): en_SG
- English (South Africa): en_ZA
- English (United Arab Emirates): en_AE
- Estonian: et
- Farsi: fa
- French (Belgium): fr_BE
- French (Canada): fr_CA
- French (Luxembourg): fr_LU
- French (Morocco): fr_MA
- French (Switzerland): fr_CH
- Georgian: ka
- German (Austria): de_AT
- German (Belgium): de_BE
- German (Luxembourg): de_LU
- German (Switzerland): de_CH
- Greek (Cyprus): el_CY
- Greenlandic: kl

Field

Details

- Gujarati: gu
- Hawaiian: haw
- Haitian Creole: ht
- Hindi: hi
- Icelandic: is
- Irish: ga
- Italian (Switzerland): it_CH
- Kannada: kn
- Kazakh: kk
- Khmer: km
- Latvian: lv
- Lithuanian: lt
- Luxembourgish: lb
- Macedonian: mk
- Malay: ms
- Malayalam: ml
- Maltese: mt
- Marathi: mr
- Montenegrin: sh_ME
- Romanian (Moldova): ro_MD
- Romansh: rm
- Russian (Armenia): ru_AM
- Russian (Belarus): ru_BY
- Russian (Kazakhstan): ru_KZ
- Russian (Kyrgyzstan): ru_KG
- Russian (Lithuania): ru_LT
- Russian (Moldova): ru_MD
- Russian (Poland): ru_PL
- Russian (Ukraine): ru_UA
- Samoan: sm
- Serbian (Cyrillic): sr
- Serbian (Latin): sh
- Spanish (Argentina): es_AR
- Spanish (Bolivia): es_BO
- Spanish (Chile): es_CL
- Spanish (Colombia): es_CO
- Spanish (Costa Rica): es_CR
- Spanish (Dominican Republic): es_DO

Field	Details
	- Spanish (Ecuador): <code>es_EC</code> - Spanish (El Salvador): <code>es_SV</code> - Spanish (Guatemala): <code>es_GT</code> - Spanish (Honduras): <code>es_HN</code> - Spanish (Nicaragua): <code>es_NI</code> - Spanish (Panama): <code>es_PA</code> - Spanish (Paraguay): <code>es_PY</code> - Spanish (Peru): <code>es_PE</code> - Spanish (Puerto Rico): <code>es_PR</code> - Spanish (United States): <code>es_US</code> - Spanish (Uruguay): <code>es_UY</code> - Spanish (Venezuela): <code>es_VE</code> - Swahili: <code>sw</code> - Tagalog: <code>tl</code> - Tamil: <code>ta</code> - Te reo: <code>mi</code> - Telugu: <code>te</code> - Urdu: <code>ur</code> - Welsh: <code>cy</code> - Xhosa: <code>xh</code> - Zulu: <code>zu</code> The values in this field are not related to the default locale selection.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the <code>namespacePrefix__componentName</code> notation. The namespace prefix can have one of the following values. In Developer Edition orgs, <code>NamespacePrefix</code> is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer.

Field	Details
	In orgs that are not Developer Edition orgs, <code>NamespacePrefix</code> is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.
Value	Type string Properties Create, Filter, Nillable, Sort, Update Description The actual translated label of the custom link. Label is Translation.
WebLinkId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the WebLink that is being translated.

Usage

Use this object to translate your custom links to URLs or s-controls into the different languages supported by Salesforce. Users with the Translation Workbench enabled can view custom link translations, but either the “Customize Application” or “Manage Translation” permission is required to create or update custom link translations.

SEE ALSO:

[CategoryNodeLocalization](#)

[ScontrolLocalization](#)

WebStore

Represents a B2B or D2C store. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You must:

- Have CRUD read permission to access this object

- Be a Salesforce admin with CRUD create permission to create a new record in this object

Fields

Field	Details
CheckoutTimeToLive	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Amount of time in minutes that a B2B checkout stays active and doesn't expire. If you use a <code>Null</code> value, your checkout never expires. If you use a <code>0</code> value, checkout is disabled. This field is available in API version 50.0 and later.
CheckoutValidAfterDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description A timestamp in the default server timezone (GMT). All B2B checkouts that start before this date are considered expired. A <code>Null</code> value means that all checkouts are valid. Example format: 2020-07-14T14:27:00.000Z. This field is available in API version 50.0 and later.
Country	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Two-digit ISO code of the store's country. Purchases can be shipped only to the country assigned to the store. This field is available in API version 55.0 and later.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The default value is <code>USD</code>. Possible values are: • <code>USD</code>—U.S. Dollar
DefaultLanguage	Type picklist

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The primary supported language for your store. Possible values include: • <code>da</code>— Danish • <code>de</code>— German • <code>en_US</code>— English • <code>es</code>— Spanish • <code>en_MX</code>— Spanish (Mexico) • <code>fi</code>— Finnish • <code>fr</code>— French • <code>it</code>— Italian • <code>ja</code>— Japanese • <code>ko</code>— Korean • <code>nl_NL</code>— Dutch • <code>no</code>— Norwegian • <code>pt_BR</code>— Portuguese (Brazil) • <code>ru</code>— Russian • <code>sv</code>— Swedish • <code>th</code>— Thai • <code>zh_CN</code>— Chinese (Simplified) • <code>zh_TW</code>— Chinese (Traditional)
DefaultTaxLocaleType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Tax type of the store. This field is available in API version 55.0 and later. Possible values include: • <code>Gross</code>— Prices include tax • <code>Net</code>— Prices don't include tax
DefaultTaxPolicyId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The default tax policy for the store. This field is a relationship field. This field is available in API version 56.0 and later. Relationship Name DefaultTaxPolicy Relationship Type Lookup Refers To TaxPolicy
Description	Type textarea Properties Create, Nillable, Update Description Description of the store.
ExternalReference	Type textarea Properties Nillable Description Identifies the instance of B2C Commerce. Format is <<SiteId>>@<<InstanceId>>. This field is available in API version 54.0 and later.
GuestBuyerProfileId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the GuestBuyerProfile associated with the store. GuestBuyerProfile determines what buyer groups are part of the profile. The guest buyer groups then determine the entitlements and pricing of products for the guest buyer.
GuestCartTimeToLive	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The time that a guest cart is to remain valid before it expires. The default value is 168 hours (7 days), and the maximum value is 720 hours (30 days). This field is available in API version 52.0 and later.

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced and not viewed directly.
LocationId	Type reference Properties Filter, Group, Nillable, Sort Description The location associated with the address.
MaxValuesPerFacet	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The maximum number of values that can be added to a facet.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the catalog.
OptionsAutoFacetingEnabled	Type boolean Properties Create, Filter, Update

Field	Details
	Description If enabled (True), the most relevant search facets are automatically returned, in addition to the configured search facets, in the product search results. If disabled (False), only the configured search facets are returned. The default is <code>False</code>. See Add Product Search Filters (Facets) for more information. This field is available in API version 50.0 or later.
<code>OptionsCartAsyncProcessingEnabled</code>	Type boolean Properties Create, Filter, Update Description Indicates whether add-to-cart requests are processed asynchronously (True) or not (False). The default value is <code>True</code>. This field is available in API version 59.0 or later.
<code>OptionsCartCalculateEnabled</code>	Type boolean Properties Create, Filter, Update Description Indicates whether the cart calculate extension is enabled (True) or not (False). The default value is <code>False</code>. This field is available in API version 59.0 or later.
<code>OptionsCartToOrderAutoCustomFieldMapping</code>	Type boolean Properties Create, Filter, Update Description Indicates whether custom field mapping for cart and order objects is enabled (True) or not (False). The default value is <code>True</code>. This field is available in API version 57.0 or later.
<code>OptionsDuplicateCartItemsEnabled</code>	Type boolean Properties Create, Filter, Update Description Indicates whether a cart can include multiple items with the same product ID (True) or not (False). The default value is <code>False</code>. This field is available in API version 59.0 or later.

Field	Details
OptionsGuestBrowsingEnabled	Type boolean Properties Create, Filter, Update Description Indicates whether guest browsing is enabled for this store. Set the option to <code>True</code> to allow guest buyers access to products in the store.
OptionsGuestCartEnabled	Type boolean Properties Create, Filter, Update Description Indicates whether guest cart access is enabled for a store created with an LWR template. Set the option to <code>True</code> to allow guest buyers access to products in the store. This field is available in API version 58.0 and later.
OptionsGuestCheckoutEnabled	Type boolean Properties Create, Filter, Update Description Indicates whether guest checkout access is enabled for a store created with an LWR template. Set the option to <code>True</code> to allow guest buyers access to products in the store. This field is available in API version 58.0 and later.
OptionsPreserveGuestCartEnabled	Type boolean Properties Create, Filter, Update Description Indicates whether cart contents are preserved when a guest logs in to the store. Set the option to <code>True</code> to preserve guest carts. This field is available in API version 60.0 and later.
OptionsSkipAdditionalFilterCheckForEachProduct	Type boolean Properties Create, Filter, Update

Field	Details
	Description By default, user entitlement checks are run as part of a search index rebuild and again when product search results are returned. Skips the second check to promote faster search performance. Set the option to <code>True</code> to skip additional entitlement checks on a search. This field is available in API version 52.0 and later.
OrderActivationStatus	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Status of the order. This field is available in API version 55.0 and later. Possible values are: - Activated - Draft
OrderLifeCycleType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates whether order summaries are processed with Order Management features: - Managed— - Unmanaged— This field is available in API version 55.0 and later.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates the owner of the store. This field is available in API 53.0 or later. This is a relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Field	Details
PaginationSize	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Dimensions of the page.
PricingStrategy	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Possible values are: • <code>LowestPrice</code>— Best Price • <code>Priority</code>— Priority Price. The default value is <code>LowestPrice</code>.
ProductGrouping	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Determines whether product variations are listed individually in search results or are represented by the parent product, which links to its children. Possible values are: • <code>NoGrouping</code>—Variations are listed individually in search results. • <code>VariationParent</code>—The parent product is returned in search results with a link to its children. The default value is <code>VariationParent</code>. This field is available in API version 52.0 and later.
SortByPriceBookId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Indicates the price book used for the sorting rule. This field is available in API version 55.0 and later. This is a relationship field. Relationship Name <code>SortByPriceBook</code>

Field	Details
	Relationship Type Lookup
	Refers To Pricebook2
StrikethroughPricebookId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The ID of the strikethrough price book.
SupportedCurrencies	Type textarea
	Properties Create, Defaulted on create, Nillable, Update
	Description Currencies supported in the store.
SupportedLanguages	Type textarea
	Properties Create, Defaulted on create, Nillable, Update
	Description Languages supported in the store.
Type	Type picklist
	Properties Defaulted on create, Filter, Group, Restricted picklist, Sort
	Description Type of store that can be created. Possible values are: • B2B • B2C • B2CE • OMS The default value is B2B.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

WebStoreEvent (API version 55.0)

Change events are available for the object.

SEE ALSO:

[WebStoreNetwork](#)

WebstoreBuyerGroup

Associates a webstore with a buyer group. Supports dynamically changing locales when buyers shop in orgs that are enabled for multiple languages and currencies. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
BuyerGroupId	Type reference Properties Create, Filter, Group, Sort, Update Description Required. The ID of the buyer group this record references. This field is a relationship field. Relationship Name BuyerGroup Relationship Type Lookup Refers To BuyerGroup
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, and LastReferenceDate isn't null, the user accessed this record or list view indirectly.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of this record.
WebStoreId	Type reference Properties Create, Filter, Group, Sort Description Required. ID of the webstore. This field is a relationship field. Relationship Name WebStore Relationship Type Lookup Refers To WebStore

Usage

This object can support a localized buyer experience by associating a Market-enabled webstore with a buyer group, allowing shoppers to view their group entitlements, price books, and promotions in localized languages and currencies.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

WebstoreBuyerGroupChangeEvent on page 68

Change events are available for the object.

WebstoreBuyerGroupFeed on page 55

Feed tracking is available for the object.

WebstoreBuyerGroupHistory on page 63

History is available for tracked fields of the object.

WebstoreBuyerGroupOwnerSharingRule on page 65

Sharing rules are available for the object.

WebstoreBuyerGroupShare on page 67

Sharing is available for the object.

WebStoreCatalog

Represents the collection of products associated with a store. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You must have the B2B Commerce license and a CMS workspace to access product media.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Possible values are: • GBP— British Pound • USD— U.S. Dollar The default value is USD.

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the catalog.
ProductCatalogId	Type reference Properties Create, Filter, Group, Sort Description The ID of the catalog, containing products.
SalesStoreId	Type reference Properties Create, Filter, Group, Sort Description The ID of the store that the catalog is associated with. This field is unique within your org.

Associated Objects

[WebStoreCatalogHistory](#)

History is available for tracked fields of the object.

WebStoreInventorySource

Used to configure the inventory source for a webstore. This object is available in API version 57.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
<code>DoesAllowGuestInventoryLevel</code>	Type boolean Properties Create, Filter, Group, Sort, Update Description Indicates whether guest users can view a product's inventory levels when guest checkout is disabled.
<code>InventoryCacheTtl</code>	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Amount of time in seconds before cache expires.
<code>InventoryDimension</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies which field within inventory levels to use to determine availability. Possible values are <code>AvailableToFulfill</code>, <code>AvailableToOrder</code>, <code>OnHand</code>.
<code>IsBopisEnabled</code>	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the location supports buy online, pick up in store. The default value is <code>false</code>.

Field	Details
IsChkInvOnActiveCartEnabled	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the inventory is checked when a customer adds or edits an item in the active cart. If an admin wants to enable the inventory check feature for their store, they must set this value to <code>true</code>. The default value is <code>true</code>.
IsDefault	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this is the default inventory source value (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
IsEnabled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the default inventory source is active. The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (<code>LastReferencedDate</code>) and not viewed.

Field	Details
LocationSourceExtRef	Type string Properties Group, Nillable Description The external reference identifier associated with the LocationSourceId.
LocationSourceId	Type reference Properties Create, Filter, Group, Sort, Update Description The location ID or location group ID for this webstore. This field is a polymorphic relationship field. Relationship Name LocationSource Relationship Type Lookup Refers To Location, LocationGroup
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The source name for this entity.
ReservationDurationInSeconds	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The amount of time in seconds that a reservation stays active and doesn't expire. Required for implementations using Omnichannel Inventory.
ShowGuestInventoryLevel	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Displays the inventory level to guest users, even when guest checkout is disabled. The default value is <code>false</code>. This field is available in API version 65.0 and later.
WebStoreId	Type reference Properties Create, Filter, Group, Sort Description The unique store ID related to this inventory source. This field is a relationship field. Relationship Name WebStore Relationship Type Lookup Refers To WebStore

WebStoreMessageContent

Represents the association of a managed content message record in CMS to a web store, along with other attributes that specify the application and intent of the message content. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Special Access Rules

This object is available only if a B2B Commerce or D2C Commerce license is enabled.

Fields

Field	Details
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether this message content is active (true) or not (false). The default value is <code>false</code>.
ManagedContentId	Type reference Properties Create, Filter, Group, Sort Description The ID of the managed content in CMS. This field is a relationship field. Relationship Name ManagedContent Refers To ManagedContent
MessageApp	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The application type that uses the message content. Possible values are: • Email
MessageUsage	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The usage type of the message content. Possible values are: • AbandonedCart • OrderConfirmation

Field	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The autogenerated name of the message content.
WebStoreId	Type reference Properties Create, Filter, Group, Sort Description The ID of the web store. This field is a relationship field. Relationship Name WebStore Relationship Type Master-detail Refers To WebStore (the master object)

WebStoreNetwork

Represents the relationship between a web store and an experience site. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You must:

- Have CRUD read permission to access this object
- Be a Salesforce admin with CRUD create permission to create a new record in this object

Fields

Field	Details
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the web store network.
NetworkId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the experience site associated with the web store. This field is a relationship field. Relationship Name Network Relationship Type Lookup Refers To Network
WebStoreId	Type reference Properties Create, Filter, Group, Sort Description ID of the web store associated with the experience site. This field is a relationship field. Relationship Name WebStore Relationship Type Lookup Refers To WebStore

Usage

After you copy web store data between a sandbox and production, or between sandboxes, you can programmatically associate the copy with a different site by updating the corresponding WebStoreNetwork record. You can even change the association while the store is active. The site must use a template that’s compatible with the web store type, and the site can’t be associated with a store. Otherwise, you can change the association only by editing the web store in the UI.

SEE ALSO:

- [Network](#)
- [WebStore](#)

WebStorePricebook

Represents a store price book used in Lightning B2B Commerce. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available only if the B2B Commerce license is enabled.

Fields

Field	Details
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Determines whether the WebStorePricebook is active (<code>true</code>) or not (<code>false</code>). Default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the store price book record.
Pricebook2Id	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the price book assigned to the store.
WebStoreId	Type reference Properties Create, Filter, Group, Sort Description The ID of the store assigned to the price book.

Usage

Use the `WebStorePricebook` object to assign price books to a store. When you assign a price book to a web store, any buyer who has access to the store can price products from the assigned price books. When a store or buyer has multiple price book assignments, including prices to the same product, the price is determined by the pricing strategy of the store.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[WebStorePricebookFeed](#)

Feed tracking is available for this object.

WebStoreSearchProdSettings

Search settings for a WebStore product search. This object is available in API version 47.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You must have a B2B Commerce or D2C Commerce commerce license to create a web store.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description ISO code for the store's currency. The default value is <code>USD</code>. Possible values are: • <code>USD</code>—U.S. Dollar The default value is <code>USD</code>.
IsExcludedFromSearch	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates if the product is excluded from searches. The default value is <code>false</code>.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the search settings for the WebStore product search.

Field	Details
ProductId	Type reference Properties Create, Filter, Group, Sort, Update Description ID of the product to search. This field is a relationship field. Relationship Name Product Relationship Type Lookup Refers To Product2
WebStoreId	Type reference Properties Create, Filter, Group, Sort Description ID of the Webstore to search. This field is a relationship field. Relationship Name WebStore Relationship Type Lookup Refers To WebStore

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[WebStoreSearchProdSettingsChangeEvent](#) on page 68

Change events are available for the object.

WebStoreShare

Represents a sharing entry on a B2B or D2C store. This object is available in API version 45.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Your Salesforce admin can manage this object using standard Salesforce sharing rules and CRUD access for the WebStore.

Fields

Field	Details
<code>AccessLevel</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description A value that represents the type of sharing allowed. Possible values are: • All—Owner • Edit—Read/Write • Read—Read Only
<code>ParentId</code>	Type reference Properties Create, Filter, Group, Sort Description The ID of the parent folder for the record. This field is a relationship field. Relationship Name Parent Refers To WebStore
<code>RowCause</code>	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort

Field**Details****Description**

Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is `Manual`. If no value is specified, the field defaults to `Manual`. All other `RowCause` values are read-only. After the sharing entry is created, this field can't be edited.

Possible values are:

- `ALMAssignmentSharing`—Actionable List Member Sharing Rule
- `CompliantDataSharing`—Compliant Data Sharing
- `GuestParentImplicit`—Associated guest user sharing
- `GuestPersonImplicit`—Associated Guest User Sharing
- `GuestRule`—Guest User Sharing Rule
- `ImplicitChild`—Account Sharing
- `ImplicitParent`—Associated record owner or sharing
- `ImplicitPerson`—Person Contact
- `LearningAssignment`—Learning Assignment Share
- `LearningAssignmentImplicit`—Learning Assignment Implicit Share
- `LearningItemAssignment`—Learning Item Assignment Share
- `Manual`—Manual Sharing
- `MfgTargetShare`—Manufacturing Target Sharing Rule
- `ObligationAssigneeShare`—Obligation Assignee Share
- `Owner`
- `Rule`—Sharing Rule
- `SharingRecordCollection`—Record Collection
- `SurveyShare`—Survey Sharing Rule
- `Team`—Sales Team
- `Territory`—Territory Assignment Rule
- `Territory2AssociationManual`—Territory Manual
- `Territory2Forecast`—Territory assignment for forecasting and reporting
- `Territory2SplitsForecast`—Territory Splits Share
- `TerritoryManual`—Territory Manual
- `TerritoryRule`—Territory Sharing Rule

UserOrGroupId

Type

reference

Properties

Create, Filter, Group, Sort

Description

ID of the User or Group that has been given access to the User. This field can't be updated.

This field is a polymorphic relationship field.

Field	Details
	Relationship Name UserOrGroup
	Refers To Group, User

Wishlist

Represents a buyer-created list of [WishlistItems](#) in a store that's built with B2B Commerce on Lightning. Available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The Wishlist object is available only if the B2B Commerce license is enabled.

Fields

Field	Details
AccountId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the account that owns the <code>Wishlist</code> .
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The ISO code for the currency that's specified on the buyer's account. Default value is <code>USD</code> . Possible values are: • <code>USD</code>—U.S. Dollar
Name	Type string

Field	Details
	Properties Create, Filter, Group, idLookup, Sort, Update Description The name of this <code>Wishlist</code> record. Name can be up to 255 characters.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user or group that owns the <code>Wishlist</code>.
WebStoreId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the <code>WebStore</code> related to this <code>Wishlist</code>.
WishlistProductCount	Type int Properties Filter, Group, Nillable, Sort Description The count of <code>WishlistItems</code> on this <code>Wishlist</code>. <code>WishlistProductCount</code> is a calculated field.

Associated Objects

This object has the following associated objects. Unless it's noted, associated objects are available in the same API version as this object.

[WishlistOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[WishlistShare](#) on page 67

Sharing is available for the object.

Usage Notes

- Wishlists aren't included in any searches.

SEE ALSO:

[WishlistItem](#)

WishlistItem

Represents an item on a `Wishlist` in a store built with B2B Commerce for Lightning. Available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The `WishlistItem` object is available only if the B2B Commerce for Lightning license is enabled.

Fields

Field	Details
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The ISO code for the currency that’s specified on the buyer’s account. Default value is <code>USD</code>. Possible values are: • <code>USD</code>—U.S. Dollar
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of this <code>WishlistItem</code> record. <code>Name</code> can be up to 255 characters.
Product2Id	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the product that is represented by the <code>WishlistItem</code>.
WishlistId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort
	Description The ID of the parent wishlist of this WishlistItem.

SEE ALSO:

[Wishlist](#)

WorkAccess

Used to grant or restrict user access to give badge definitions. Each badge definition record must have one WorkAccess record.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Additional Considerations and Related Objects

WorkAccess is not available through Schema Builder and is not customizable. A WorkAccess record is **required** for users to **Give** BadgeDefinitions. If a WorkAccess record is not created, BadgeDefinitions will not be available to users.

The sharing of WorkAccess records is through WorkAccessShare. For each WorkBadgeDefinition record, you must create both a WorkAccess record (per WorkBadgeDefinition) and WorkAccessShare records for sharing to users or groups.

Fields

Field Name	Details
AccessType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Define the type of Access given to user ("Give").
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field Name	Details
	Description Salesforce unique ID for owner of Access record. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ParentId	Type reference Properties Create, Filter, Group, Sort, Update Description Salesforce unique ID for BadgeDefinition record associated with this Access record. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To WorkBadgeDefinition

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

WorkAccessChangeEvent (API version 62.0)

Change events are available for the object.

WorkAccessOwnerSharingRule

Sharing rules are available for the object.

The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

WorkAccessShare

Sharing is available for the object.

WorkAccessShare

Used to control Givers of WorkBadgeDefinition records.

You can only create, edit, and delete sharing entries for standard objects whose `RowCause` field is set to `Manual`. Sharing entries for standard objects with different `RowCause` values are created as a result of your Salesforce org's sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren't stored at all.



Note: While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it's possible that we'll stop storing certain share records to improve performance. As a best practice, don't create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Additional Considerations and Related Objects

Related to [WorkAccess Object](#). `WorkAccess` is the parent of `WorkAccessShare`.

Fields

The properties available for some fields depend on the default organization-wide sharing settings. The properties listed are true for the default settings of such fields.

Field Name	Details
<code>AccessLevel</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description CRUD Access Level (picklist values: Read Only, Read/Write, Owner).
<code>ParentId</code>	Type reference Properties Create, Filter, Group, Sort Description ID for <code>WorkAccess</code> record. This is a relationship field. Relationship Name Parent Relationship Type Lookup Refers To <code>WorkAccess</code>

Field Name	Details
RowCause	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is <code>Manual</code>. If no value is specified, the field defaults to <code>Manual</code>. All other <code>RowCause</code> values are read-only. After the sharing entry is created, this field can't be edited. Values can include: <code>Manual</code>—The User or Group has access because a user with "All" access manually shared the <code>WorkAccess</code> with them. <code>Owner</code>—The User is the owner of the <code>WorkAccess</code> or is in a role above the <code>WorkAccess</code> owner in the role hierarchy.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description User or Group ID for <code>WorkAccess</code>. This is a polymorphic relationship field. Relationship Name <code>UserOrGroup</code> Relationship Type Lookup Refers To Group, User

WorkBadge

Represents information about who the badge was given to and which badge was given. A `WorkBadge` record is created for each recipient of a `WorkBadgeDefinition`.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Additional Considerations and Related Objects

WorkBadge is a lookup to WorkThanks. Each WorkBadge record must derive a SourceId from WorkThanks. There can be multiple WorkBadge records tied to a single WorkThanks record.

Fields

Field Name	Details
DefinitionId	Type reference Properties Create, Filter, Group, Sort Description Required. Salesforce unique ID for the given WorkBadgeDefinition record given. This is a relationship field. Relationship Name Definition Relationship Type Lookup Refers To WorkBadgeDefinition
Description	Type textarea Properties Nillable Description The description of the WorkBadgeDefinition.
GiverId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the badge giver. Can't be the same as RecipientId. This is a relationship field. Relationship Name Giver Relationship Type Lookup Refers To User

Field Name	Details
ImageUrl	Type url Properties Filter, Group, Nillable, Sort Description The URL of the badge image.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The time stamp that indicates when the current user last viewed a record that is related to this WorkBadge.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The time stamp that indicates when the current user last viewed this WorkBadge. If this value is null, this record might have been only referenced (LastReferencedDate) and not viewed.
Message	Type textarea Properties Nillable Description The message accompanying the thanks badge.
NetworkId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the community that this WorkBadge is associated with. This field is available only if digital experiences is enabled in your org.
RecipientId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Sort Description Required. Salesforce unique ID for User who is the Recipient of Badge. Can't be the same as <code>GiverId</code> This is a relationship field. Relationship Name Recipient Relationship Type Lookup Refers To User
RewardId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Salesforce unique ID for Reward given with badge (if Reward Badge)
SourceId	Type reference Properties Create, Filter, Group, Sort Description Salesforce unique ID for Thanks record referenced to this badge. This is a relationship field. Relationship Name Source Relationship Type Lookup Refers To WorkThanks

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

WorkBadgeChangeEvent (API version 62.0)

Change events are available for the object.

WorkBadgeDefinition

Represents the attributes of a badge including the badge name, description, and image. Each WorkBadge record must have a lookup to a WorkBadgeDefinition since badge attributes (like badge name) are derived from the WorkBadgeDefinition object.

Supported Calls

```
create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()
```

Additional Considerations and Related Objects

WorkBadgeDefinition has a field called `ImageUrl` that references a DocumentID. This is a required field for creating a Badge.

To grant “giver” access to a WorkBadgeDefinition, you must also create the [WorkAccess](#) (and the related WorkAccessShare records.

Each WorkBadgeDefinition has an `ImageUrl` field that must be populated with a DocumentID of the Document record containing the badge image.

Fields

Field Name	Details
Description	Type textarea Properties Create, Update Description Required. Limit: 4000 characters. The description of the badge and what it means to receive this badge.
GivenBadgeCount	Type int Properties Filter, Group, Nillable, Sort Description The number of badges given per user or across all users.  Note: This field can't be added in a list view or referenced in a formula field.
ImageUrl	Type url Properties Create, Filter, Group, Sort, Update

Field Name	Details
	Description Required. This is the badge image that will be displayed in the UI. Use DocumentID or ImageURL.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Represents whether a WorkBadgeDefinition is active and available in the UI and API.
IsCompanyWide	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Represents a special class of badges known as Company Badges. Company badges are visible to the entire company and visible in specific list view filters.  Note: If this field is selected, everyone within the user's network will be able to give the badge automatically. If this field is not selected, people with sharing must be added to the badge's access list in order to give the badge.
IsLimitPerUser	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the badge limit is per user (<code>true</code>) or across all users (<code>false</code>). The default value is <code>false</code> .
IsRewardBadge	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the badge is a reward badge (<code>true</code>) or not (<code>false</code>).
LastReferencedDate	Type dateTime

Field Name	Details
	Properties Filter, Nillable, Sort Description The time stamp that indicates when the current user last viewed a record that is related to this WorkBadgeDefinition.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The time stamp that indicates when the current user last viewed this WorkBadgeDefinition. If this value is null, this record might have been only referenced (LastReferencedDate) and not viewed.
LimitNumber	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The badge limit per user or across all users.
LimitStartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The start date of the badge limit. The date can be reset to the current date.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Name of the Badge. Label: Badge Title.
NetworkId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The ID of the community that this WorkBadgeDefinition is associated with. This field is available only if digital experiences is enabled in your org.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Salesforce User ID for User who is the Owner of the WorkBadgeDefinition record (usually the creator of the record) This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
RewardFundId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Salesforce unique ID for the WorkRewardFund that is associated with this WorkBadgeDefinition. WorkBadgeDefinition records with a RewardFundID indicate a Reward Badge.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[WorkBadgeDefinitionChangeEvent](#) (API version 62.0)

Change events are available for the object.

[WorkBadgeDefinitionFeed](#)

Feed tracking is available for the object.

[WorkBadgeDefinitionHistory](#)

History is available for tracked fields of the object.

[WorkBadgeDefinitionOwnerSharingRule](#)

Sharing rules are available for the object.

[WorkBadgeDefinitionShare](#)

Sharing is available for the object.

WorkCapacityAvailability

Represents the available work capacity for a specific time and service territory. This object is available in API version 59.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AvailCapacityHours	Type double Properties Create, Filter, Nillable, Sort, Update Description The number of available capacity in hours in the time frame the user defined for a service territory.
AvailCapacityMinutes	Type double Properties Create, Filter, Nillable, Sort, Update Description The number of available capacity in minutes in the time frame the user defined for a service territory.
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The end date of the total available capacity.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, and LastReferenceDate isn't null, the user accessed this record or list view indirectly.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner of this object. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ServiceTerritoryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the service territory of the work capacity availability calculation. This field is a relationship field. Relationship Name ServiceTerritory Relationship Type Lookup Refers To ServiceTerritory
StartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The start date of the total available capacity.
TimePeriod	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The time period the user selected when creating the work capacity limit. The value is copied from the TimePeriod field of the WorkCapacityLimit object. Possible values are: Day The default value is Day.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[WorkCapacityAvailabilityFeed](#) on page 55

Feed tracking is available for the object.

[WorkCapacityAvailabilityShare](#) on page 67

Sharing is available for the object.

WorkCapacityLimit

Represents the capacity limit in a specific service territory for a workstream or for the whole service territory in a given period. This object is available in API version 59.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
CapacityLimitRelaxation	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Defines the relaxation behavior that determines the limit override policy for this limit if the limit override policy is set per limit in Field Service Settings. If the limit override policy isn't set per limit, this value is ignored. Valid strings are: • Empty value - no limit override • 0 - limit override starts at midnight on the day of service • Positive integer - limit override starts this number of hours after midnight. the maximum value is 23. • Negative integer - limit override starts this number of hours before midnight. The maximum value is 336.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Description of the work capacity limit.
EndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description End date of the work capacity limit. If no <code>EndDate</code> is set this work capacity limit is without an expiration date.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the work capacity limit is active or inactive. When creating a record, save the record, and then activate it. You can't update fields in an active record. The default value is <code>false</code>.
IsFriday	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Indicates whether the limitation is applied on Fridays. The default value is <code>false</code> .
IsMonday	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the limitation is applied on Mondays. The default value is <code>false</code> .
IsSaturday	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the limitation is applied on Saturdays. The default value is <code>false</code> .
IsSunday	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the limitation is applied on Sundays. The default value is <code>false</code> .
IsSvcTerrOnlyLimit	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Apply this work capacity limit to the entire service territory. The default value is <code>false</code> .
IsThursday	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Indicates whether the limitation is applied on Thursdays. The default value is <code>false</code> .
IsTuesday	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the limitation is applied on Tuesdays. The default value is <code>false</code> .
IsWednesday	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the limitation is applied on Wednesdays. The default value is <code>false</code> .
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, and <code>LastReferenceDate</code> isn't null, the user accessed this record or list view indirectly.
LimitationUnits	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description Unit of the <code>LimitationValue</code>. Possible values are: • <code>Hours</code> • <code>Percentage</code> The default value is <code>Hours</code>.
<code>LimitationValue</code>	Type double Properties Create, Filter, Sort, Update Description If the <code>LimitationUnits</code> is <code>Hours</code>, <code>LimitationValue</code> is the threshold that represents how many hours of total work capacity can be scheduled for a specific workstream in a service territory. Enter the number of hours for the daily limitation as a whole number. If the <code>LimitationUnits</code> is <code>Percentage</code> this threshold represents the percentage of the total work capacity that can be scheduled for a specific workstream in a service territory. Enter the percentage for the daily limitation as a whole number.
<code>OwnerId</code>	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the creator of the work capacity limit. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
<code>ServiceTerritoryId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the service territory of the work capacity workstream for which the limit is defined. This field is a relationship field.

Field	Details
	Relationship Name ServiceTerritory Relationship Type Lookup Refers To ServiceTerritory
StartDate	Type date Properties Create, Filter, Group, Sort, Update Description The start date of the Work Capacity Limit.
SvcApptField	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Work-specific criteria used to define the capacity limit for the workstream. The service appointment field is set for the organization when the first work capacity limit instance is created. Possible values are: • <code>ServiceAppointment.AccountId</code> • <code>ServiceAppointment.ActualDuration</code>—Actual duration (in minutes) • <code>ServiceAppointment.Duration</code>—Duration • <code>ServiceAppointment.DurationInMinutes</code> • <code>ServiceAppointment.FSL__Appointment_Grade__c</code> • <code>ServiceAppointment.FSL__Auto_Schedule__c</code> • <code>ServiceAppointment.FSL__Duration_In_Minutes__c</code>—Scheduled duration • <code>ServiceAppointment.FSL__Emergency__c</code> • <code>ServiceAppointment.FSL__GanttColor__c</code> • <code>ServiceAppointment.FSL__GanttLabel__c</code> • <code>ServiceAppointment.FSL__InJeopardyReason__c</code> • <code>ServiceAppointment.FSL__InJeopardy__c</code> • <code>ServiceAppointment.FSL__IsFillInCandidate__c</code> • <code>ServiceAppointment.FSL__IsMultiDay__c</code> • <code>ServiceAppointment.FSL__Last_Updated_Epoch__c</code>

Field	Details
	• <code>ServiceAppointment.FSL__MDS_Calculated_length__c</code>—Multiday work calculated length • <code>ServiceAppointment.FSL__Pinned__c</code> • <code>ServiceAppointment.FSL__Prevent_Geocoding_For_Chatter_Actions__c</code> • <code>ServiceAppointment.FSL__Related_Service__c</code> • <code>ServiceAppointment.FSL__Same_Day__c</code> • <code>ServiceAppointment.FSL__Same_Resource__c</code> • <code>ServiceAppointment.FSL__Schedule_Mode__c</code> • <code>ServiceAppointment.FSL__Schedule_over_lower_priority_appointment__c</code> • <code>ServiceAppointment.FSL__Scheduling_Policy_Used__c</code> • <code>ServiceAppointment.FSL__Time_Dependency__c</code> • <code>ServiceAppointment.FSL__UpdatedByOptimization__c</code> • <code>ServiceAppointment.FSL__Use_Async_Logic__c</code> • <code>ServiceAppointment.FSL__Virtual_Service_For_Chatter_Action__c</code> • <code>ServiceAppointment.IsOffsiteAppointment</code> • <code>ServiceAppointment.Subject</code> • <code>ServiceAppointment.WorkTypeId</code>—Work Type ID
<code>SvcApptFieldValDplyNm</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The workstream display name of <code>SvcApptFieldValue</code>. If <code>SvcApptField</code> is a lookup to a service appointment, <code>SvcApptFieldValue</code> is an ID and the display name describes the value for the user.
<code>SvcApptFieldValue</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The value of <code>SvcApptField</code>, the work-specific criteria of the capacity limit.
<code>TimePeriod</code>	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Duration for defining the capacity limitation on the workstream in the service territory.

Field	Details
	Possible values are: • Day The default value is Day.
WorkCapacityLimitNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Read-only. Auto populated, unique identifying number.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[WorkCapacityLimitChangeEvent](#) (API version 62.0)

Change events are available for the object.

[WorkCapacityLimitFeed](#) on page 55

Feed tracking is available for the object.

[WorkCapacityLimitHistory](#) on page 63

History is available for tracked fields of the object.

[WorkCapacityLimitShare](#) on page 67

Sharing is available for the object.

WorkCapacityUsage

Represents the capacity usage in a specific service territory for a workstream or for the whole service territory in a given period. This object is available in API version 59.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AvailCapacityHours	Type double

Field	Details
	Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description This value is copied from the <code>AvailCapacityHours</code> of the <code>WorkCapacityAvailability</code> object for the service territory on the same date.
CapacityLimitRelaxation	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Defines the relaxation behavior that determines the limit override policy for this limit if the limit override policy is set per limit in Field Service Settings. If the limit override policy isn't set per limit, this value is ignored. Valid strings are: • Empty value - no limit override • 0 - limit override starts at midnight on the day of service • Positive integer - limit override starts this number of hours after midnight. the maximum value is 23. • Negative integer - limit override starts this number of hours before midnight. The maximum value is 336.
ConsumptionToLimitRatio	Type double Properties Create, Defaulted on create, Filter, Nillable, Sort Description (Time consumed in hours / Limit in hours) * 100 Note the following exceptions. • If a limit isn't defined (-1) the ratio is -1 (even if consumption is 0 or higher). • If consumption is 0, and the limit is a number greater than 0, then the ration is 0. • If consumption is 0 and the limit is 0, the ration is 100% hard-coded. • If consumption is greater than 0 and the limit is 0, the ration is calculated as if the limit = 0.99 in order to get a result that's higher than 100%.
EndDate	Type date Properties Create, Filter, Group, Sort Description End date of the time period for which the capacity usage is accumulated.

Field	Details
IsSvcTerrOnlyLimit	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Applies this work capacity limit to the entire service territory. The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, and <code>LastReferenceDate</code> isn't null, the user accessed this record or list view indirectly.
LimitationPercentage	Type double Properties Create, Defaulted on create, Filter, Nillable, Sort Description If the <code>LimitationUnits</code> is <code>Percentage</code> this value is copied from the <code>LimitationValue</code> field of the <code>WorkCapacityLimit</code> object.
LimitationUnits	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort Description Defines whether the limitation for the workstream in the service territory is in hours or as a percentage of all the available hours for all the workstreams for which limitations exist in the service territory on a specific day. Possible values are:

Field	Details
	- Hours - Percentage The default value is Hours.
LimitationValue	Type double Properties Create, Filter, Sort Description The <code>LimitationValue</code> depends on the <code>LimitationUnit</code>. If the <code>LimitationUnit</code> is Hours the value is copied from <code>LimitationValue</code> in the <code>WorkCapacityLimit</code> object. If the <code>LimitationUnit</code> is Percentage, the percentage is calculated relative to the availability in the <code>WorkCapacityAvailability</code> object.
OriginalLimit	Type double Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description If the limit value is changed after the work capacity usage was created, this parameter is the original value.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of this object. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ServiceTerritoryId	Type reference Properties Create, Filter, Group, Nillable, Sort

Field	Details
	Description ID of the service territory of the work capacity workstream for which usage is accumulated. This field is a relationship field. Relationship Name ServiceTerritory Relationship Type Lookup Refers To ServiceTerritory
StartDate	Type date Properties Create, Filter, Group, Sort Description Start date of the time period for which the capacity usage is accumulated.
SvcApptField	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Work-specific criteria used to define the capacity limit for the workstream. Possible values are: • <code>ServiceAppointment.AccountId</code> • <code>ServiceAppointment.ActualDuration</code>—Actual duration (in minutes) • <code>ServiceAppointment.Duration</code>—Duration • <code>ServiceAppointment.DurationInMinutes</code> • <code>ServiceAppointment.FSL__Appointment_Grade__ce</code> • <code>ServiceAppointment.FSL__Auto_Schedule__c</code> • <code>ServiceAppointment.FSL__Duration_In_Minutes__c</code>—Scheduled duration • <code>ServiceAppointment.FSL__Emergency__c</code> • <code>ServiceAppointment.FSL__GanttColor__c</code> • <code>ServiceAppointment.FSL__GanttLabel__c</code> • <code>ServiceAppointment.FSL__InJeopardyReason__c</code> • <code>ServiceAppointment.FSL__InJeopardy__c</code> • <code>ServiceAppointment.FSL__IsFillInCandidate__c</code> • <code>ServiceAppointment.FSL__IsMultiDay__c</code>

Field	Details
	• <code>ServiceAppointment.FSL__Last_Updated_Epoch__c</code> • <code>ServiceAppointment.FSL__MDS_Calculated_length__c</code>—Multiday work calculated length • <code>ServiceAppointment.FSL__Pinned__c</code> • <code>ServiceAppointment.FSL__Prevent_Geocoding_For_Chatter_Actions__c</code> • <code>ServiceAppointment.FSL__Related_Service__c</code> • <code>ServiceAppointment.FSL__Same_Day__c</code> • <code>ServiceAppointment.FSL__Same_Resource__c</code> • <code>ServiceAppointment.FSL__Schedule_Mode__c</code> • <code>ServiceAppointment.FSL__Schedule_over_lower_priority_appointment__c</code> • <code>ServiceAppointment.FSL__Scheduling_Policy_Used__c</code> • <code>ServiceAppointment.FSL__Time_Dependency__c</code> • <code>ServiceAppointment.FSL__UpdatedByOptimization__c</code> • <code>ServiceAppointment.FSL__Use_Async_Logic__c</code> • <code>ServiceAppointment.FSL__Virtual_Service_For_Chatter_Action__c</code> • <code>ServiceAppointment.IsOffsiteAppointment</code> • <code>ServiceAppointment.Subject</code> • <code>ServiceAppointment.WorkTypeId</code>—Work Type ID
<code>SvcApptFieldValDplyNm</code>	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Workstream display name of <code>SvcApptFieldValue</code>.
<code>SvcApptFieldValue</code>	Type string Properties Create, Filter, Group, Nillable, Sort Description Value of <code>SvcApptField</code>, the work-specific criteria of the capacity limit.
<code>TimeConsumedInHours</code>	Type double Properties Create, Filter, Nillable, Sort Description Time consumed in hours by the workstream in the service territory for the defined period. This value is calculated by dividing <code>TimeConsumedInMinutes</code> by 60.

Field	Details
TimeConsumedInMinutes	Type double Properties Create, Filter, Sort Description Time consumed in minutes by the workstream in the service territory for the defined period.
TimePeriod	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort Description Duration for defining the capacity limitation on the workstream in the service territory. Possible values are: • Day The default value is Day.
WcuUniqueField1	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description Read-only. Auto populated, unique identifying number.
WcuUniqueField2	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Read-only. Auto populated, unique identifying number.
WorkCapacityUsageNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Read-only. Auto populated, unique identifying number.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

WorkCapacityUsageFeed on page 55

Feed tracking is available for the object.

WorkCapacityUsageShare on page 67

Sharing is available for the object.

WorkCoaching

Represents a single coaching relationship between two users. One of the users is defined as the coach and the other is defined as a coachee. WorkCoaching is feed-enabled so there is a private feed available to the coach and coachee.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
CoachId	Type reference Properties Create, Filter, Group, Sort, Update Description [Required] The coach in this 1:1 coaching relationship.
CoachedId	Type reference Properties Create, Filter, Group, Sort, Update Description [Required] The user being coached in this 1:1 coaching relationship.
IsInactive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the coaching relationship is <i>Inactive</i> (<code>true</code>) or not (<code>false</code>).

Field Name	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The time stamp that indicates when the current user last viewed a record that is related to this coaching relationship.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The time stamp that indicates when the current user last viewed this coaching relationship. If this value is null, this record might have been only referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Create, Filter, Group, Sort, Update Description [Required] The record's name. Max length is 255 characters.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the contact who owns the WorkCoaching record.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

WorkCoachingFeed

Feed tracking is available for the object.

WorkCoachingHistory

History is available for tracked fields of the object.

The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

WorkCoachingOwnerSharingRule

Sharing rules are available for the object.

The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

WorkCoachingShare

Sharing is available for the object.

WorkDemographic

Represents the field values used to specify slices in the workload forecasting and capacity planning. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

The org must have the Workforce Engagement license. To view, create, edit, or delete records, the user must have the Workforce Engagement Analyst permission set.

Fields

Field	Details
Channel	Type string Properties Filter, Group, Nillable, Sort Description The channel value.
CustomWorkType	Type string Properties Filter, Group, Nillable, Sort Description Custom dimension value that the user can define other than the channel, region, and skill dimensions.
GroupIdentifier	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort Description The group or queue associated to a slice when creating an Omni-based workload.
JobProfileId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The foreign key to the JobProfile object. This is a relationship field. Relationship Name JobProfile Relationship Type Lookup Refers To JobProfile
Region	Type string Properties Filter, Group, Nillable, Sort Description The region value.
ServiceChannelId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The foreign key to the ServiceChannel object. This is a relationship field. Relationship Name ServiceChannel Relationship Type Lookup Refers To ServiceChannel

Field	Details
ServiceTerritoryId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The foreign key to the ServiceTerritory object. This is a relationship field. Relationship Name ServiceTerritory Relationship Type Lookup Refers To ServiceTerritory
SkillSet	Type string Properties Filter, Group, Nillable, Sort Description The skill value.

WorkFeedback

Represents the answer to a question that a person was asked via a feedback request. Also used to store offered feedback without linking it to a particular question.



Note: The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Additional Considerations and Related Objects

- Ownership is transferred to the requester on submit for certain types (ad-hoc feedback).
- The record is read-only after the request that it's linked to is set to Submitted.
- You can't link a feedback object to a request unless you are the recipient.
- The question that the feedback is linked to must be part of the same question set that the request is linked to.

Fields

Field Name	Details
Feedback	Type textarea Properties Create, Nillable, Update Description Contains either the free-form text of the answer, or the choice selected by the user. Max length is 65536.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the WorkFeedback record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of the WorkFeedback record.
QuestionId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The question this answer applies to. When this feedback is linked to a request of an unsolicited type, the question ID is null.
RequestId	Type reference Properties Create, Filter, Group, Sort Description The ID of the request this response belongs to, in case of offered feedback.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[WorkFeedbackOwnerSharingRule](#)

Sharing rules are available for the object.

[WorkFeedbackShare](#)

Sharing is available for the object.

WorkFeedbackQuestion

Represents a free-form text type or multiple choice question within a set of questions.



Note: The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
Choices	Type textarea Properties Create, Nillable, Update Description New-line separated list of valid choices for multiple choice questions. Maximum length is 1000 characters.
Detail	Type textarea Properties Create, Nillable, Update Description Detailed instructions on how to answer the question.
IsConfidentialAnswer	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field Name	Details
	Description Answers to questions marked confidential will not be shared with the subject of the review. This field applies only to performance summaries.
IsOptional	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If this option is selected, the question is optional and isn't required to be answered. This field applies only to performance summaries.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description A short description of the question, which can be used as a header for reports and Calibration.
Number	Type int Properties Create, Filter, Group, Sort, Update Description The order of the question that is displayed within the question set, such as question number three in a question set that has five questions.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of the WorkFeedbackQuestion.
QuestionSetId	Type reference Properties Create, Filter, Group, Sort, Update Description The question set this question is a part of.

Field Name	Details
Text	Type textarea Properties Create, Update Description The body of the question. Max length is 16384 characters.
Type	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Allows for either a free-form text answer or a multiple choice question defined by new-line separate choices in the 'Choices' field. Valid picklist values are: • MultipleChoice • FreeText • Rating

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

WorkFeedbackQuestionOwnerSharingRule

Sharing rules are available for the object.

WorkFeedbackQuestionShare

Sharing is available for the object.

WorkFeedbackQuestionSet

Represents a set of questions being asked. The question set is used to link all the individual requests where different recipients were asked the same set of questions on the same subject.



Note: The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

In the WDC performance application, a question set defines the type of summaries and their due dates that will accompany the deployment of a specific performance summary cycle.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
DueDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date that this specific question set is expected to be submitted by the recipient. This field applies only to performance summaries.
FeedbackType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The description of the collection of questions that are written in context to the type of recipient answering them, relative to the subject of the summary. This field applies only to performance summaries.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the question set. Maximum length is 225 characters.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of the WorkFeedbackQuestionSet.
PerformanceCycleId	Type reference Properties Create, Filter, Group, Nillable, Sort Description If a question set is associated to a performance summary cycle, then that cycle ID is referenced in this field. This field applies only to performance summaries.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[WorkFeedbackQuestionSetOwnerSharingRule](#)

Sharing rules are available for the object.

[WorkFeedbackQuestionSetShare](#)

Sharing is available for the object.

WorkFeedbackRequest

Represents a single feedback request on a subject or topic (question) to a single recipient in the feedback application. In the case of offered feedback, WorkFeedbackRequest represents feedback that is offered about a subject. In the performance application, WorkFeedbackRequest represents a request for feedback on a set of questions from a question set, on a subject—for the recipient to complete and submit.



Note: The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Additional Considerations and Related Objects

- After a request's state is changed to Submitted, fields can't be changed, except for LastSharedDate and IsUnreadByOwner.
- If LastRemindDate is updated, a reminder notification will be sent to the request's recipient (only possible when request is in Draft state).
- When a new request is created, a notification is sent to the recipient.
- When a recipient of a request submits their feedback (Draft->Submitted), a notification will be sent to requester (except for offered feedback).
- Requester cannot modify the subject of the question set after a request is created.
- For offered feedback (to user, to manager, or both), the person who is offering feedback is both the creator of WorkFeedbackRequest as well as the recipient.

Fields

Field Name	Details
AdHocFeedback	Type textarea
	Properties Create, Filter, Nillable, Sort
	Description The content of the feedback.

Field Name	Details
AdHocQuestion	Type textarea Properties Create, Filter, Nillable, Sort Description The content of the feedback question.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the WorkFeedbackRequest.
FeedbackRequestState	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The current state of the feedback request. Allowed picklist values are: • Draft • Submitted • Declined
FeedbackType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort Description Specifies the type of request. Picklist values that are used for performance summaries: • Unspecified • Peer Summary • Self Summary • Manager Summary • Skip Level Summary Picklist values that are used for feedback: • Personal • Unsolicited to User • Unsolicited to Manager

Field Name	Details
	• Unsolicited to User and Manager • On Topic The type of the feedback determines the sharing and visibility rules that are applied to answers.
IsDeployed	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If <code>true</code>, the feedback is part of a deployed performance summary cycle.
IsShareWithSubject	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If <code>true</code>, the feedback is shared with the summary subject.
IsUnreadByOwner	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If <code>true</code>, the submitted request has not been seen by the requester.
IsUnsolicited	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description If <code>true</code>, the feedback request is unsolicited feedback offered to another user.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The time stamp that indicates when the current user last viewed a record that is related to this WorkFeedbackRequest.

Field Name	Details
LastRemindDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The last time a reminder was sent to the recipient of this draft request.
LastSharedDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The last time this request was shared with another user or group.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The time stamp that indicates when the current user last viewed this WorkFeedbackRequest. If this value is null, this record might have been only referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the WorkFeedbackRequest.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of the WorkFeedbackRequest.
PerformanceCycleId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description Used by performance summaries to link to a summary cycle. This field applies only to performance summaries.
QuestionSetId	Type reference Properties Create, Filter, Group, Nillable, Sort Description Question set associated with the current request.
RecipientId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description User asked to provide feedback on the subject.
RelatedObjectId	Type reference Properties Create, Filter, Group, Nillable, Sort Description Specifies a record in the system that this feedback request is related to. Used by ad-hoc feedback to gather feedback in the context of an opportunity or WDC goal. Used by performance summaries to link to a summary cycle.
SharingScope	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The users that see the feedback. <code>SharingScope</code> can have the following values: • Nobody • Subject • Manager • SubjectAndManager

Field Name	Details
SubjectId	Type reference Properties Create, Filter, Group, Nillable, Sort Description The ID of the user that this request (or offer) is about.
SubmitFeedbackToId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the person this performance summary feedback request (and its respective answers) is shared with. It's also the ID of the person who owns the requested subject's manager summary request. This field applies only to performance summaries.
SubmittedDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The last time (in case it was reopened by admin) this request was submitted by the recipient. This field applies only to performance summaries.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[WorkFeedbackRequestFeed](#)

Feed tracking is available for the object.

[WorkFeedbackRequestOwnerSharingRule](#)

Sharing rules are available for the object.

[WorkFeedbackRequestShare](#)

Sharing is available for the object.

WorkforceCapacity

Represents the time series for actual or forecasted workforce allocation. This object is available in API version 51.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The org must have the Workforce Engagement license. To view, create, edit, and delete records, the user must have the Workforce Engagement Analyst permission set.

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Additional information about the planning.
EndTime	Type dateTime Properties Create, Filter, Sort, Update Description The end date and time of the planning.
IsOmni	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Derived from isOmni field on Workload object. Indicates that the workload is Omni-based. If workload is null, the field value defaults to <code>false</code>. The default value is <code>false</code>.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the plan.

Field	Details
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the record. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
PlanType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The type of capacity plan. Possible values are: • Intraday—The plan shows intraday management. • LongTerm—The plan predicts the required number of full-time employees (FTEs). • ShortTerm—The plan predicts the required number of shifts. This field is available in API version 54.0 and later.
StartDateTime	Type dateTime Properties Create, Filter, Sort, Update Description The start date and time of the planning.
TimeZone	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The time zone associated with the capacity plan. Possible values are the time zones supported by Workforce Engagement. This field is available in API version 56.0 and later.

Field	Details
WorkloadId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The foreign key to the Workload object. This is a relationship field. Relationship Name Workload Relationship Type Lookup Refers To Workload

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[WorkforceCapacityOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[WorkforceCapacityShare](#) on page 67

Sharing is available for the object.

WorkforceCapacityUnit

Represents the number of resources allocated or needed for a specific set of work items at a timestamp within a specific duration. This object is available in API version 51.0 and later.

Supported Calls

```
create(), delete(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(),
undelete(), update(), upsert()
```

Special Access Rules

The org must have the Workforce Engagement license. To view, create, edit, or delete records, the user must have the Workforce Engagement Analyst permission set.

Fields

Field	Details
AssignedTotalCount	Type double Properties Create, Filter, Nillable, Sort Description The number of shifts assigned at specific time period.
AvailableTotalCount	Type double Properties Create, Filter, Nillable, Sort Description The total number of shifts scheduled at a specific time period.
Capacity	Type double Properties Create, Filter, Nillable, Sort Description Staffing prediction for a capacity plan. This field is available in API version 54.0 and later.
DateTime	Type dateTime Properties Create, Filter, Sort, Update Description The timestamp of the data point.
IsOmni	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Derived from the isOmni field on WorkforceCapacity. Indicates that the workload is Omni-based. The default value is 'false'.
IsShiftTemplateNonStandard	Type boolean

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the shift template that's used at a specific time period is a non-standard shift. This field is available in API version 53.0 and later. The default value is <code>false</code>.
JobProfileName	Type string Properties Filter, Group, Nillable, Sort Description The derived field from the WorkDemographic SkillSet field.
MaxCount	Type int Properties Create, Filter, Group, Nillable, Sort Description The max number of resources allocated or needed at a specific time period.
MeasureUnit	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The time interval (in minutes) used in capacity plans. Possible values are: • 43200—Monthly for long-term capacity plans. This value is available in API version 54.0 and later. • 10080—Weekly • 1440—Daily • 60—Hourly • 30—30 minutes. Reserved for future use. • 15—15 minutes. Reserved for future use. The default value is '1440'.
OriginalTotalCount	Type int

Field	Details
	Properties Create, Filter, Group, Nillable, Sort Description The original total number of resources allocated or needed at specific time period calculated from the planning process.
ResourceGap	Type int Properties Filter, Group, Nillable, Sort Description Represents the resource gap between the available and required resources.
ServiceTerritoryName	Type string Properties Filter, Group, Nillable, Sort Description The derived field from the WorkDemographic Region field.
ShiftTemplateDuration	Type double Properties Create, Filter, Nillable, Sort, Update Description The duration of the shift template that's used at a specific time period. This field is available in API version 53.0 and later.
ShiftTemplateDurationType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates whether the duration of the shift template that's used at a specific time period is in minutes or hours. This field is available in API version 53.0 and later. Possible values are: • H—Hours • M—Minutes The default value is H.

Field	Details
ShiftTemplateId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the shift template that's used at a specific time period. This field is available in API version 53.0 and later. This is a relationship field. Relationship Name ShiftTemplate Relationship Type Lookup Refers To ShiftTemplate
ShiftTemplateJobProfile	Type string Properties Filter, Group, Nillable, Sort Description The job profile that relates to the shift template that's used at a specific time period. This field is available in API version 53.0 and later.
ShiftTemplateName	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Name of the shift template that's used at a specific time period. This field is available in API version 53.0 and later.
ShiftTemplateStartTime	Type time Properties Create, Filter, Nillable, Sort, Update Description The start time of the shift template that's used at a specific time period. This field is available in API version 53.0 and later.
TotalCount	Type int

Field	Details
	Properties Filter, Group, Nillable, Sort Description The total number of resources allocated or needed at specific time period. It represents the updated count after the adjustment. This value is the same as <code>OriginalTotalCount</code> if no adjustments were made. This is a calculated field.
<code>WorkDemographicId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The foreign key to WorkDemographic object. This is a relationship field. Relationship Name WorkDemographic Relationship Type Lookup Refers To WorkDemographic
<code>WorkforceCapacityId</code>	Type reference Properties Create, Filter, Group, Sort Description The foreign key to WorkCapacity object. This is a relationship field. Relationship Name WorkforceCapacity Relationship Type Lookup Refers To WorkforceCapacity

WorkGoal

Represents the components of a goal, such as its description and associated metrics. This object has been deprecated as of API version 35.0. Use the [Goal](#) object to query information about WDC goals.

 **Note:** The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Related

[WorkGoalCollaborator](#), [WorkGoalLink](#), [WorkGoalFeed](#)

Fields

Field Name	Details
ActualValue	Type double Properties Create, Filter, Nillable, Sort, Update Description The actual value of the WorkGoal metric. Applicable only to WorkGoal objects of Type: Metric.
ActualValueExternalUrl	Type url Properties Create, Filter, Group, Nillable, Sort, Update Description Contains a URL that references WDC data synchronization for the actual value of a metric. Applicable only to WorkGoal objects of Type: Metric.
CompletionDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The completion date of the goal.  Note: Field-level security limits access to only administrators and owners by default, and only they can complete a goal.
Description	Type textarea (max length 4000)

Field Name	Details
	Properties Create, Nillable, Update Description The description of the goal.
DueDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date the WorkGoal object is due (optional). Applicable only to WorkGoal objects of <code>Type: Metric</code>.
FlaggedAs	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The progress of the WorkGoal object. Applicable only to WorkGoal objects of <code>Type: Metric</code>. Possible values: - On Track: Progress on the metric is on track. - Behind: Progress on the metric is behind schedule. - Postponed: The metric is postponed. - Critical: Progress on the metric is critical.
ImageUrl	Type url Properties Create, Filter, Group, Nillable, Sort, Update Description The URL for the goal image. The image must be stored in Documents and set as externally available. Applicable only to WorkGoal objects of <code>Type: Goal</code>.
InitialValue	Type double Properties Create, Filter, Nillable, Sort, Update Description The initial value of the WorkGoal metric. Applicable only to WorkGoal objects of <code>Type: Metric</code> and <code>MetricType: Progress or Percent</code>.

Field Name	Details
IsKeyCompanyGoal	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Used to indicate if the goal is a key company goal. Used for the Company Goal Showcase. Applicable only to WorkGoal objects of <code>Type: Goal</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The time stamp that indicates when the current user last viewed a record that is related to this goal.
LastSyncDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The time stamp that indicates when the actual value was last synced with the associated metrics report.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The time stamp that indicates when the current user last viewed this goal.
MetricType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The type of metric that is represented. (See values in the following list). Applies only to WorkGoal objects of <code>Type: Metric</code>. Possible values: - Progress: ActualValue / TargetValue as a percentage - Percent: the metric as a percentage only

Field Name	Details
	• YesNo: the completed / not completed metric as a milestone • Absolute: Deprecated
MetricTypeDataSource	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies how the metric (ActualValue and CurrentValue) is updated. Applies only to WorkGoal objects of Type: Goal and Metric. Possible values: • Manual: indicates that the actual and target value of the metric is updated manually by the user • Rollup: indicates that the actual and target value of a goal is rolled up automatically by WDC Goals • DataSyncActualOnly: indicates that the actual value of the metric is linked to a Salesforce report
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the WorkGoal object. (Maximum length is 255.)
OverallStatus	Type string Properties Filter, Group, Nillable, Sort Description The overall calculated status of the WorkGoal based on FlaggedAs and CompletionDate.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the user who owns the WorkGoal.
ParentId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description Specifies the structural parent of the WorkGoal. For example, a goal that has a metric is represented by a WorkGoal of <code>Type Metric</code>, which has a parent of WorkGoal of <code>Type Goal</code>.  Note: The root and the parent must be set to the parent goal for any child metrics.
Progress	Type percent Properties Filter, Nillable, Sort Description Read Only. The overall progress of the WorkGoal.
RootId	Type reference to a WorkGoal object Properties Create, Filter, Group, Nillable, Sort, Update Description Specifies the structural root of the WorkGoal. For example, a goal that has a metric is represented by a WorkGoal of <code>Type Metric</code>, which has a root of WorkGoal of <code>Type Goal</code>.
State	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The state of the WorkGoal object. Applies only to WorkGoal objects of <code>Type Metric</code>. Possible values: • Draft: the draft state for the WorkGoal • Published: published state for the WorkGoal • Archived: archived state for the WorkGoal (for example, goals that no longer apply)
TargetValue	Type double

Field Name	Details
	Properties Create, Filter, Nillable, Sort, Update Description The target value of the WorkGoal. Applies only to WorkGoal objects of <code>Type</code>: Metric.
Type	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The type of the WorkGoal object, used to differentiate between the components of a goal. (This field is used to represent components of a goal such as its description and associated metrics.) Possible values: • Goal: a goal • Metric: a metric (typically associated with goals) • Objective: an objective • KeyResult: a key result (typically associated with objectives) • V2Mom: a V2MOM (pilot feature) • Vision: a vision (pilot feature — typically associated with V2MOM) • Value: a value (pilot feature - typically associated with V2MOM) • Method: a method (pilot feature - typically associated with V2MOM) • Obstacle: an obstacle (pilot feature - typically associated with V2MOM) • Measure: a measure (pilot feature - typically associated with a method)  Note: Administrators can rename goals and metrics to objectives and key results, respectively. If this preference is enabled, use the <code>Type</code> Objective or KeyResult. Otherwise, use the default <code>Type</code> Goal or KeyResult.
Weight	Type double Properties Create, Filter, Nillable, Sort, Update Description The weight of the goal or metric. The sum of the weights should equal 100%.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

WorkGoalFeed (API version 35.0)

Feed tracking is available for the object.

WorkGoalHistory

History is available for tracked fields of the object.

The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

WorkGoalOwnerSharingRule

Sharing rules are available for the object.

The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

WorkGoalShare

Sharing is available for the object.

WorkGoalCollaborator

Represents collaborators on a WorkGoal object. This doesn't include WorkGoal followers, which is handled by Chatter Feed Follow functionality. This object has been deprecated as of API version 35.0. Use the [Goal](#) object to query information about WDC goals.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
InvitationDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date that a user was invited to become a collaborator (null if the user was not invited).
State	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Indicates the state of the collaborating user. Whether the user has not responded, joined, or declined collaboration. The possible values are:

Field Name	Details
	• PendingResponse: a user who was invited to collaborate but hasn't joined or declined • Joined: a user who is collaborating on a goal (joined/commit) • Declined: a user who declined to collaborate on a goal
UserId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The collaborating user.
WorkGoalId	Type reference Properties Create, Filter, Group, Sort Description The WorkGoal object that this collaborator is a part of.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

WorkGoalCollaboratorHistory

History is available for tracked fields of the object.

The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

WorkGoalCollaboratorHistory

Represents the history of changes to the values in the fields in a WorkGoalCollaborator object. Access is read-only.



Note: This object has been deprecated as of API version 35.0. Use the [Goal](#) object to query information about WDC goals in API version 35.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Fields

Field Name	Details
DataType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Data type of the field that was changed.
Field	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Name of the standard or custom field.
NewValue	Type anyType Properties Nillable, Sort Description New value of the modified field.
OldValue	Type anyType Properties Nillable, Sort Description Previous value of the modified field.
WorkGoalCollaboratorId	Type reference Properties Filter, Group, Sort Description ID of the WorkGoalCollaborator object that is associated with this history entry.

WorkGoalHistory

Represents the history of changes to the values in the fields of a WorkGoal. Access is read-only. This object has been deprecated as of API version 35.0. Use the GoalHistory object to query historical information for WDC goals.



Note: The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Fields

Field Name	Details
Field	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The name of the field that was changed.
NewValue	Type Any Type Properties Nillable, Sort Description The new value of the field that was changed.
OldValue	Type Any Type Properties Nillable, Sort Description The latest value of the field before it was changed.
WorkGoalId	Type reference Properties Filter, Group, Sort

Field Name	Details
	Description ID of the Goal. Label is Goal ID.

WorkGoalLink

Represents the relationship between two goals (many to many relationship). This object has been deprecated as of API version 35.0. Use the [GoalLink](#) object to query information about the relationship between two WDC goals.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Whether the WorkGoalLink is active (<code>true</code>) or not (<code>false</code>)
LinkType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of link
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The auto-generated name of the goal link
SourceGoalId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Sort, Update
	Description The ID of the source WorkGoal object
TargetGoalId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The ID of the target WorkGoal object

WorkGoalShare

Represents a sharing entry on a WorkGoal object. This object has been deprecated as of API version 35.0. Use the GoalShare object to query information about sharing for WDC goals.

You can only create, edit, and delete sharing entries for standard objects whose `RowCause` field is set to `Manual`. Sharing entries for standard objects with different `RowCause` values are created as a result of your Salesforce org's sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren't stored at all.



Note: While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it's possible that we'll stop storing certain share records to improve performance. As a best practice, don't create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

The properties available for some fields depend on the default organization-wide sharing settings. The properties listed are true for the default settings of such fields.

Field Name	Details
AccessLevel	Type picklist
	Properties Create, Filter, Group, Restricted picklist, Sort, Update
	Description The user's or group's level of access to the goal. The possible values are: • Read

Field Name	Details
	- Edit - All: This value is not valid when you create, update, or delete records This field must be set to an access level that is higher than the organization's default access level for goals.
ParentId	Type reference Properties Create, Filter, Group, Sort Description ID of the WorkGoal object that is associated with this sharing entry.
RowCause	Type picklist Properties Filter, Group, Restricted picklist, Sort Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is <code>Manual</code>. If no value is specified, the field defaults to <code>Manual</code>. All other <code>RowCause</code> values are read-only. After the sharing entry is created, this field can't be edited. Valid values include: <code>Owner</code>—The User is the owner of the WorkGoal or is in a user role above the WorkGoal owner in the role hierarchy. <code>Manual</code>—The User or Group has access, because a user with "All" access manually shared the WorkGoal with the user or group. <code>Rule</code>—The User or Group has access via a WorkGoal sharing rule. <code>GuestRule</code>—The User or Group has access via a WorkGoal guest user sharing rule.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description ID of the user or group that was given access to the goal. This field can't be updated.

Workload

Represents the time series for work item volume and average handle time from aggregation and forecasting processes. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The org must have the Workforce Engagement license. To view, create, edit, or delete records, the user must have the Workforce Engagement Analyst permission set.

Fields

Field	Details
Description	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description Additional information about the workload
EndDateTime	Type dateTime Properties Create, Filter, Sort Description The end date and time of the time series represented by the Workload object.
IsOmni	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates that the workload is Omni-based. The default value is 'false'.
Name	Type string

Field	Details
	Properties Create, Filter, Group, idLookup, Sort, Update Description The workload name.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the workload. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
StartDateTime	Type dateTime Properties Create, Filter, Sort Description The start date and time of the time series represented by the Workload object.
TimeZone	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description The time zone associated with the workload. Possible values are the time zones supported by Workforce Engagement. This field is available in API version 56.0 and later.
WorkloadType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The type of the workload.

Field	Details
	Possible values are: • F—Forecasted • H—Historical • IH—Intraday History. This value is available in API version 55.0 and later. The default value is 'H'.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[WorkloadOwnerSharingRule](#) on page 65

Sharing rules are available for the object.

[WorkloadShare](#) on page 67

Sharing is available for the object.

WorkloadUnit

Represents the number of work items and average handle time in a specific time interval. This object is available in API version 49.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

The org must have a Workforce Engagement license. To view, create, edit, and delete records, the user must have the Workforce Engagement Analyst permission set.

Fields

Field	Details
AverageHandleTime	Type double Properties Filter, Nillable, Sort Description The average handle time at a specific period of time.

Field	Details
Channel	Type string Properties Filter, Group, Nillable, Sort Description The channel value.
CustomWorkType	Type string Properties Filter, Group, Nillable, Sort Description The derived field of WorkDemographic.CustomWorkType for the custom dimension value.
DateTime	Type dateTime Properties Create, Filter, Sort, Update Description The timestamp of the single data point in the time series of the workload.
IsOmni	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Derived from isOmni field in workload. Indicates that the workload is Omni-based The default value is 'false'.
MeasureUnit	Type string Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The time interval (in minutes) used in the workload. Possible values are: • 43200—Monthly. Reserved for future use. • 10080—Weekly • 1440—Daily • 60—Hourly

Field	Details
	30—30 minutes. Reserved for future use. 15—15 minutes. Reserved for future use. The default value is '1440'.
Region	Type string Properties Filter, Group, Nillable, Sort Description The derived field from WorkDemographic.Region for the region value.
SkillSet	Type string Properties Filter, Group, Nillable, Sort Description The derived field from WorkDemographic.SkillSet for the skill value.
TotalCount	Type int Properties Create, Filter, Group, Sort Description The total number work items at a specific period of time.
WorkDemographicId	Type reference Properties Create, Filter, Group, Sort, Update Description The foreign key to the WorkDemographic object. This is a relationship field. Relationship Name WorkDemographic Relationship Type Lookup Refers To WorkDemographic
WorkloadId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort Description The foreign key to the Workload object. This is a relationship field. Relationship Name Workload Relationship Type Lookup Refers To Workload
WorkloadType	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The derived field from Workload.WorkloadType to indicate the type of workload, for example, a history or forecast workload. Possible values are: • F—Forecasted • H—Historical The default value is 'H'.

WorkOrder

Represents field service work to be performed for a customer. This object is available in API version 36.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- Work orders or Field Service must be enabled.
- The following fields can't be edited, regardless of your field-level security settings:
 - Discount
 - GrandTotal

- IsGeneratedFromMaintenancePlan
- RootWorkOrderId

Fields

Field Name	Details
AccountId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The account associated with the work order. This is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
Address	Type address Properties Filter, Nillable Description The compound form of the address where the work order is completed.
AssetId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The asset associated with the work order. This is a relationship field. Relationship Name Asset Relationship Type Lookup Refers To Asset

Field Name	Details
AssetWarrantyId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The asset warranty term associated with the work order. This field is available in API version 50.0 and above.
BusinessHoursId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The business hours associated with the work order. This is a relationship field. Relationship Name BusinessHours Relationship Type Lookup Refers To BusinessHours
CaseId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The case associated with the work order. This is a relationship field. Relationship Name Case Relationship Type Lookup Refers To Case
City	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The city where the work order is completed. Maximum length is 40 characters.
ContactId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The contact associated with the work order. This is a relationship field. Relationship Name Contact Relationship Type Lookup Refers To Contact
Country	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The country where the work order is completed. Maximum length is 80 characters.
CurrencyIsoCode	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization. The label in the user interface is <code>Currency ISO Code</code> .
Description	Type textarea Properties Create, Nillable, Update Description The description of the work order. Try to include the steps needed to change the work order's status to Completed.

Field Name	Details
Discount	Type percent Properties Filter, Nillable, Sort Description Read only. The weighted average of the discounts on all line items in the work order. It can be any positive number up to 100.
Duration	Type double Properties Create, Filter, Nillable, Sort, Update Description The estimated time required to complete the work order. Specify the duration unit in the <code>Duration Type</code> field. If the <code>Duration</code> field on a Work Order is null, it adopts the duration value from the Work Type object when the work type is updated or inserted. Work order duration and work order line item duration are independent of each other. If you want work order duration to automatically show the sum of the work order line items' duration, replace the <code>Duration</code> field on work orders with a custom roll-up summary field.
DurationInMinutes	Type double Properties Filter, Nillable, Sort Description The estimated duration in minutes. For internal use only.
DurationType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The unit of the duration: Minutes or Hours.
EndDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update

Field Name	Details
	Description The date when the work order is completed. This field is blank unless you set up an Apex trigger or quick action to populate it. For example, you can create a quick action that sets the <code>EndDate</code> to 365 days after the <code>StartDate</code>.
EntitlementId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The entitlement associated with the work order.
GeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Accuracy level of the geocode for the address. See Compound Field Considerations and Limitations for details on geolocation compound fields.
GrandTotal	Type currency Properties Filter, Nillable, Sort Description Read only. The total price of the work order with tax added.
IsClosed	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the work order is closed (<code>true</code>) or open (<code>false</code>).
IsGeneratedFromMaintenancePlan	Type boolean Properties Defaulted on create, Filter, Group, Sort Description (Read Only) Indicates that the work order was generated from a maintenance plan (<code>true</code>), rather than manually created (<code>false</code>).

Field Name	Details
IsStopped	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether a milestone is paused (<code>true</code>) or counting down (<code>false</code>). This field is available only if Enable stopped time and actual elapsed time is selected on the Entitlement Settings page.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the work order was last modified. Its label in the user interface is <code>Last Modified Date</code>.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the work order was last viewed.
Latitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with Longitude to specify the precise geolocation of the address where the work order is completed. Acceptable values are numbers between <code>-90</code> and <code>90</code> with up to 15 decimal places. See Compound Field Considerations and Limitations for details on geolocation compound fields.
LineItemCount	Type int Properties Filter, Group, Nillable, Sort Description The number of work order line items in the work order. Its label in the user interface is <code>Line Items</code>.

Field Name	Details
LocationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The location associated with the work order. For example, a work site. This is a relationship field. Relationship Name Location Relationship Type Lookup Refers To Location
Longitude	Type double Properties Create, Filter, Nillable, Sort, Update Description Used with Latitude to specify the precise geolocation of the address where the work order is completed. Acceptable values are numbers between –180 and 180 with up to 15 decimal places. See Compound Field Considerations and Limitations for details on geolocation compound fields.
MaintenancePlanId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The maintenance plan associated with the work order. When the work order is auto-generated from a maintenance plan, this field automatically lists the related plan.
MaintenanceWorkRuleId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the maintenance work rule that generated this work order. This field is available in API version 50.0 and above.

Field Name	Details
MilestoneStatus	Type string Properties Group, Nillable, Sort Description Indicates the status of a milestone. This field is visible if an entitlement process is applied to a work order.
MinimumCrewSize	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The minimum crew size allowed for a crew assigned to the work order. If you're not using the Field Service managed package, this field serves as a suggestion rather than a rule. If you are using the managed package, the scheduling optimizer counts the number of service crew members on a service crew to determine whether it fits a work order's minimum crew size requirement.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The work order's assigned owner. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ParentWorkOrderId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The work order's parent work order, if it has one. Create a custom report to view a work order's child work orders. This is a relationship field.

Field Name	Details
	Relationship Name ParentWorkOrder Relationship Type Lookup Refers To WorkOrder
PostWorkSummary	Type textarea Properties Create, Nillable, Update Description The summary of a completed work order that's either entered manually or created by an AI agent.
PostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The postal code where the work order is completed. Maximum length is 20 characters.
PreWorkBriefPromptTemplate	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the activated Pre-Work Brief prompt template.
Pricebook2Id	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The price book associated with the work order. Adding a price book to the work order lets you assign different price book entries to the work order's line items. This is only available if Product2 is enabled. This is a relationship field. Relationship Name Pricebook2

Field Name	Details
	Relationship Type Lookup Refers To Pricebook2
Priority	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The priority of the work order. The picklist includes the following values, which can be customized: • Low • Medium • High • Critical
ProductServiceCampaignId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The product service campaign associated with the work order.
ProductServiceCampaignItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The product service campaign item associated with the work order.
RecommendedCrewSize	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The recommended number of people on the service crew assigned to the work order. For example, you might have a Minimum Crew Size of 2 and a Recommended Crew Size of 3.

Field Name	Details
ReturnOrderId	Type reference Properties Filter, Group, Nillable, Sort Description The return order associated with the work order.
ReturnOrderLineItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The return order line item associated with the work order.
RootWorkOrderId	Type reference Properties Filter, Group, Nillable, Sort Description (Read only) The top-level work order in a work order hierarchy. Depending on where a work order lies in the hierarchy, its root could be the same as its parent. View a work order's child work order in the Child Work Orders related list. This is a relationship field. Relationship Name RootWorkOrder Relationship Type Lookup Refers To WorkOrder
ServiceAppointmentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of service appointments on the work order.
ServiceContractId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The service contract associated with the work order.
ServiceDocumentTemplate	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The template ID which sets the template for each service document for the Document Builder feature.
ServiceReportLanguage	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language used for all service reports and service report previews created for the work order, its service appointments, and its work order line items and their service appointments. If the field is blank, service reports are generated in the default language in Salesforce of the person creating the report. To appear as an option in the ServiceReportLanguage field, a language must be set up in Translation Workbench or be one of Salesforce's 18 fully supported languages . Rich text fields and service report section names aren't translated.
ServiceReportTemplateId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The service report template that the work order uses. If you don't specify a service report template on a work order, it uses the service report template listed on its work type. If the work type doesn't list a template or no work type is specified, the work order uses the default service report template.
ServiceTerritoryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The service territory where the work order is taking place. This is a relationship field.

Field Name	Details
	Relationship Name ServiceTerritory Relationship Type Lookup Refers To ServiceTerritory
SlaExitDate	Type dateTime Properties Filter, Nillable, Sort Description The time that the work order exits the entitlement process.
SlaStartDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The time that the work order enters the entitlement process. You can update or reset the time if you have “Edit” permission on work orders.
StartDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date when the work order goes into effect. This field is blank unless you set up an Apex trigger or quick action to populate it. For example, you can create a quick action that sets the StartDate to the date when the Status changes to In Progress.
State	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The state where the work order is completed. Maximum length is 80 characters.
Status	Type picklist

Field Name	Details
	Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The status of the work order. The picklist includes the following values, which can be customized: • New—Work order was created, but there hasn't yet been any activity. • In Progress—Work has begun. • On Hold—Work is paused. • Completed—Work is complete. • Cannot Complete—Work could not be completed. • Closed—All work and associated activity is complete. • Canceled—Work is canceled, typically before any work began. Changing a work order's status does not affect the status of its work order line items or associated service appointments.
StatusCategory	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The category that each Status value falls into. The Status Category field has eight default values: seven values which are identical to the default Status values, and a None value for statuses without a status category. If you create custom Status values, you must indicate which category it belongs to. For example, if you create a <i>Waiting for Response</i> value, you may decide that it belongs in the <i>On Hold</i> category. To learn which processes reference StatusCategory, see How are Status Categories Used?
StopStartDate	Type dateTime Properties Filter, Nillable, Sort Description Indicates when the milestone was paused. The label in the user interface is Stopped Since.
Street	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The street number and name where the work order is completed.
Subject	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The subject of the work order. Try to describe the nature and purpose of the job to be completed. For example, "Annual On-Site Well Maintenance." Maximum length is 255 characters.
Subtotal	Type currency Properties Filter, Nillable, Sort Description Read only. The total of the work order line items' subtotals before discounts and taxes are applied.
SuggestedMaintenanceDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The suggested date that the work order is completed. When the work order is auto-generated from a maintenance plan, this field is automatically populated based on the maintenance plan's settings.
Tax	Type currency Properties Create, Filter, Nillable, Sort, Update Description The total tax on the work order. You can enter a number with or without the currency symbol and use up to two decimal places. For example, in a work order whose total price is \$100, enter \$10 to apply a 10% tax.
TotalPrice	Type currency Properties Filter, Nillable, Sort

Field Name	Details
	Description Read only. The total of the work order line items' prices. This value has discounts applied but not tax.
WorkOrderNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An eight-digit, auto-generated number that identifies the work order.
WorkTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The work type associated with the work order. When a work type is selected, the work order automatically inherits the work type's <code>Duration</code> , <code>Duration Type</code> , and required skills. If the <code>Duration</code> field for the work type is null, enter the duration value. This is a relationship field. Relationship Name WorkType Relationship Type Lookup Refers To WorkType

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[WorkOrderChangeEvent](#) (API version 48.0)

Change events are available for the object.

[WorkOrderFeed](#)

Feed tracking is available for the object.

[WorkOrderHistory](#)

History is available for tracked fields of the object.

[WorkOrderOwnerSharingRule](#)

Sharing rules are available for the object.

WorkOrderShare

Sharing is available for the object.

WorkOrderHistory

Represents the history of changes made to tracked fields on a work order. This object is available in API version 36.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Special Access Rules

Work orders or Field Service must be enabled in your organization, and field tracking for work order fields must be configured.

Fields

Field Name	Details
<code>DataType</code>	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Data type of the field that was changed.
<code>Field</code>	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The name of the field that was changed.
<code>NewValue</code>	Type anyType Properties Nillable, Sort Description The new value of the field that was changed.
<code>OldValue</code>	Type anyType

Field Name	Details
	Properties Nillable, Sort Description The value of the field before it was changed.
WorkOrderId	Type reference Properties Filter, Group, Sort Description ID of the work order being tracked. The history is displayed on the detail page for this record. This is a relationship field. Relationship Name WorkOrder Relationship Type Lookup Refers To WorkOrder

WorkOrderLineItem

Represents a subtask on a work order in field service. This object is available in API version 36.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Work orders or Field Service must be enabled.

Fields

Field Name	Details
Address	Type address

Field Name	Details
	Properties Filter, Nillable Description The compound form of the address where the line item is completed.
AssetId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The asset associated with the work order line item. The asset is not automatically inherited from the parent work order. This is a relationship field. Relationship Name Asset Relationship Type Lookup Refers To Asset
AssetWarrantyId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The asset warranty term associated with the work order line item. This field is available in API version 50.0 and above.
City	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The city where the line item is completed. Maximum length is 40 characters.
Country	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The country where the line item is completed. Maximum length is 80 characters.

Field Name	Details
CurrencyIsoCode	Type picklist Properties Defaulted on create, Filter, Group, Restricted picklist, Sort Description Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization. The label in the user interface is <code>Currency ISO Code</code>.
Description	Type textarea Properties Create, Nillable, Update Description The description of the work order line item. Try to describe the steps needed to mark the line item Completed.
Discount	Type percent Properties Create, Filter, Nillable, Sort, Update Description The percent discount to apply to the line item. You can enter a number with or without the percent symbol, and you can use up to two decimal places.
Duration	Type double Properties Create, Filter, Nillable, Sort, Update Description The estimated time required to complete the line item. Specify the duration unit in the <code>Duration Type</code> field. If the <code>Duration</code> field on a Work Order is null, it adopts the duration value from the Work Type object when the work type is updated or inserted.  Note: Work order duration and work order line item duration are independent of each other. If you want work order duration to automatically show the sum of the work order line items' duration, replace the <code>Duration</code> field on work orders with a custom roll-up summary field.
DurationInMinutes	Type double

Field Name	Details
	Properties Filter, Nillable, Sort Description The estimated duration in minutes. For internal use only.
DurationType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The unit of the duration: Minutes or Hours.
EndDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date on which the line item is completed. This field is blank unless you set up an Apex trigger or quick action to populate it. For example, you can create a quick action that sets the EndDate to 365 days after the StartDate.
GeocodeAccuracy	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The level of accuracy of a location's geographical coordinates compared with its physical address. Usually provided by a geocoding service based on the address's latitude and longitude coordinates.  Note: This field is available in the API only. Possible values are: • Address • Block • City • County • ExtendedZip • NearAddress • Neighborhood • State • Street

Field Name	Details
	- Unknown - Zip
IsClosed	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the line item has been closed. Changing the line item's status to <code>Closed</code> causes this checkbox to be selected in the user interface (sets <code>IsClosed</code> to <code>true</code>).  Tip: Use this field to report on closed versus open work order line items.
IsGeneratedFromMaintenancePlan	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Identifies whether the work order line item is generated from a maintenance plan.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the line item was last modified. Its label in the user interface is <code>Last Modified Date</code>.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the line item was last viewed.
Latitude	Type double Properties Create, Filter, Nillable, Sort, Update

Field Name	Details
	Description Used with <code>Longitude</code> to specify the precise geolocation of the address where the line item is completed. Acceptable values are numbers between -90 and 90 with up to 15 decimal places.  Note: This field is available in the API only.
<code>LineItemNumber</code>	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-generated number that identifies the work order line item. Each work order's line items start at 1.
<code>ListPrice</code>	Type currency Properties Filter, Nillable, Sort Description The price of the line item (product) as listed in its corresponding price book entry. If a price book entry isn't specified, the list price defaults to zero.
<code>LocationId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description A location associated with the work order line item. For example, a work site. This is a relationship field. Relationship Name Location Relationship Type Lookup Refers To Location
<code>Longitude</code>	Type double Properties Create, Filter, Nillable, Sort, Update

Field Name	Details
	Description Used with <code>Latitude</code> to specify the precise geolocation of the address where the line item is completed. Acceptable values are numbers between –180 and 180 with up to 15 decimal places.  Note: This field is available in the API only.
MaintenancePlanId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The maintenance plan associated with the work order line item.
MaintenanceWorkRuleId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the maintenance work rule that generated this line item. This field is available in API version 50.0 and above.
MinimumCrewSize	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The minimum crew size allowed for a crew assigned to the line item. If you're not using the Field Service managed package, this field serves as a suggestion rather than a rule. If you are using the managed package, the scheduling optimizer counts the number of service crew members on a service crew to determine whether it fits a work order line item's minimum crew size requirement.
OrderId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The order associated with the line item. For example, you may need to order replacement parts before you can complete the line item. This is a relationship field.

Field Name	Details
	Relationship Name Order Relationship Type Lookup Refers To Order
ParentWorkOrderLineItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The line item's parent work order line item, if it has one.  Tip: Create a custom report to view a line item's child line items. This is a relationship field. Relationship Name ParentWorkOrderLineItem Relationship Type Lookup Refers To WorkOrderLineItem
PostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The postal code where the line item is completed. Maximum length is 20 characters.
PricebookEntryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The price book entry (product) associated with the line item. The label in the user interface is <code>Product</code>. This field's lookup search only returns products that are included in the work order's price book. This is a relationship field.

Field Name	Details
	Relationship Name PricebookEntry Relationship Type Lookup Refers To PricebookEntry
Priority	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The priority of the line item. The picklist includes the following values, which can be customized: • Low • Medium • High • Critical
Product2Id	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description (Read only) The product associated with the price book entry. This field is not available in the user interface. For best results, use the <code>PricebookEntryId</code> field in any custom code or layouts. This is a relationship field. Relationship Name Product2 Relationship Type Lookup Refers To Product2
ProductServiceCampaignId	Type reference Properties Filter, Group, Nillable, Sort Description The product service campaign associated with the work order line item.

Field Name	Details
ProductServiceCampaignItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The product service campaign item associated with the work order line item.
Quantity	Type double Properties Create, Filter, Nillable, Sort, Update Description Number of units of the line item included in the associated work order.
RecommendedCrewSize	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The recommended number of people on the service crew assigned to the line item. For example, you might have a Minimum Crew Size of 2 and a Recommended Crew Size of 3.
ReturnOrderId	Type reference Properties Filter, Group, Nillable, Sort Description The return order associated with the work order line item.
ReturnOrderLineItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The return order line item associated with the work order line item.
RootWorkOrderLineItemId	Type reference Properties Filter, Group, Nillable, Sort

Field Name	Details
	Description (Read only) The top-level line item in a work order line item hierarchy. Depending on where a line item lies in the hierarchy, its root could be the same as its parent.  Note: View a line item's child line items in the Child Work Order Line Items related list. This is a relationship field. Relationship Name RootWorkOrderLineItem Relationship Type Lookup Refers To WorkOrderLineItem
ServiceAppointmentCount	Type int Properties Filter, Group, Nillable, Sort Description The number of service appointments on the work order line item.
ServiceDocumentTemplate	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The template ID which sets the template for each service document for the Document Builder feature.
ServiceReportTemplateId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The service report template that the line item uses. If you don't specify a service report template on a work order line item, it uses the service report template listed on its work type. If the work type doesn't list a template or no work type is specified, the line item uses the default service report template.
ServiceTerritoryId	Type reference

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The service territory where the line item is completed. This is a relationship field. Relationship Name ServiceTerritory Relationship Type Lookup Refers To ServiceTerritory
StartDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date on which the line item goes into effect. This field is blank unless you set up an Apex trigger or quick action to populate it. For example, you can create a quick action that sets the StartDate to the date when the Status changes to In Progress.
State	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The state where the line item is completed. Maximum length is 80 characters.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The status of the line item. The picklist includes the following values, which can be customized: • New—Line item was created, but there hasn't yet been any activity. • In Progress—Work has begun. • On Hold—Work is paused. • Completed—Work is complete. • Cannot Complete—Work could not be completed.

Field Name	Details
	• Closed—All work and associated activity is complete. • Canceled—Work is canceled, typically before any work began.
StatusCategory	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The category that each <code>Status</code> value falls into. The <code>Status Category</code> field has eight default values: seven values which are identical to the default <code>Status</code> values, and a <code>None</code> value for statuses without a status category. If you create custom <code>Status</code> values, you must indicate which category it belongs to. For example, if you create a <i>Waiting for Response</i> value, you may decide that it belongs in the <i>On Hold</i> category. To learn which processes reference <code>StatusCategory</code>, see How are Status Categories Used?
Street	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The street number and name where the line item is completed.
Subject	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A word or phrase describing the line item.
Subtotal	Type currency Properties Filter, Nillable, Sort Description (Read only) The line item's unit price multiplied by the quantity.
SuggestedMaintenanceDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description Date when maintenance work is planned.
TotalPrice	Type currency Properties Filter, Nillable, Sort Description Read only. The line item's subtotal with discounts applied.
UnitPrice	Type currency Properties Create, Filter, Nillable, Sort, Update Description Initially, the unit price for a work order line item is the line item's list price from the price book, but you can change it.
WorkOrderId	Type reference Properties Create, Filter, Group, Sort Description The line item's parent work order. Because work order line items must be associated with a work order, this is a required field. This is a relationship field. Relationship Name WorkOrder Relationship Type Lookup Refers To WorkOrder
WorkTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The work type associated with the line item. When a work type is selected, the line item automatically inherits the work type's <code>Duration</code> , <code>Duration Type</code> , and required skills. If the <code>Duration</code> field for the work type is null, enter the duration value.

Field Name	Details
	This is a relationship field.
	Relationship Name WorkType
	Relationship Type Lookup
	Refers To WorkType

Usage

A work order line item is a child record of a work order. It represents a specific subtask on a work order.

For example, suppose a customer purchased a truck from you. The truck is represented as an asset in your Salesforce org. After some time, the truck needs both headlight bulbs replaced. Here's one way that you can use work orders and work order line items to track the repair.

1. Create a work order named "Replace Headlight Bulbs" from the asset record detail page.
2. Add three work order line items to the work order: "Replace Left Headlight Bulb," "Replace Right Headlight Bulb," and "Test Headlights."
3. Assign the work order to a technician via a queue.
4. As the technician completes each line item, he or she marks the item `Completed`.
5. When all the line items are complete, the technician marks the work order `Completed`.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[WorkOrderLineItemChangeEvent](#) (API version 48.0)

Change events are available for the object.

[WorkOrderLineItemFeed](#)

Feed tracking is available for the object.

[WorkOrderLineItemHistory](#)

History is available for tracked fields of the object.

WorkOrderLineItemHistory

Represents the history of changes made to tracked fields on a work order line item. This object is available in API version 36.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Special Access Rules

Work orders or Field Service must be enabled in your organization, and field tracking for work order line item fields must be configured.

Fields

Field Name	Details
DataType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description Data type of the field that was changed.
Field	Type picklist Properties Filter, Group, Restricted picklist, Sort Description The name of the field that was changed.
NewValue	Type anyType Properties Nillable, Sort Description The new value of the field that was changed.
OldValue	Type anyType Properties Nillable, Sort Description The value of the field before it was changed.
WorkOrderLineItemId	Type reference Properties Filter, Group, Sort Description ID of the work order line item being tracked. The history is displayed on the detail page for this record.

Field Name	Details
	This is a relationship field.
	Relationship Name WorkOrderLineItem
	Relationship Type Lookup
	Refers To WorkOrderLineItem

WorkOrderLineItemStatus

Represents a possible status of a work order line item in field service.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
ApiName	Type string Properties Filter, Group, idLookup, Sort Description The API name of the status value.
IsDefault	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates that the status value is the default status on work orders. Only one status value can be the default.
MasterLabel	Type string

Field Name	Details
	Properties Filter, Group, Nillable, Sort Description The label for the picklist value that appears in the UI.
SortOrder	Type int Properties Filter, Group, Nillable, Sort Description The value's position in the drop-down list of values in the UI.
StatusCode	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The status category that the value corresponds to. The Status Category field has seven values which are identical to the default Status values.

Usage

The Status field on work order line items comes with the following values:

- New—Line item was created, but there hasn't yet been any activity.
- In Progress—Work has begun.
- On Hold—Work is paused.
- Completed—Work is complete.
- Cannot Complete—Work could not be completed.
- Closed—All work and associated activity is complete.
- Canceled—Work is canceled, typically before any work began.

The WorkOrderLineItemStatus object corresponds to the Status field. Adding a value to the Status field—for example, Canceled By Customer—creates a work order line item status record, and vice versa.



Note: Work order line items also come with a StatusCategory field whose values are identical to the default Status values. If you create custom Status values, you must indicate which category it belongs to. For example, if you create a *Customer Absent* value, you may decide that it belongs in the *Cannot Complete* category. To learn which processes reference StatusCategory, see [How are Status Categories Used?](#)

WorkOrderShare

Represents a sharing entry on a work order. This object is available in API version 36.0 and later.

You can only create, edit, and delete sharing entries for standard objects whose `RowCause` field is set to `Manual`. Sharing entries for standard objects with different `RowCause` values are created as a result of your Salesforce org's sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren't stored at all.



Note: While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it's possible that we'll stop storing certain share records to improve performance. As a best practice, don't create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Work orders or Field Service must be enabled in your organization. External users can't access this object.

Fields

Field Name	Details
<code>AccessLevel</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description Level of access that the user or group has to the work order. The possible values are: • <i>Read</i> • <i>Edit</i> • <i>All</i> (This value isn't valid for create or update calls.) Set to an access level that is at least equal to the organization's default work order access level.
<code>ParentId</code>	Type reference Properties Create, Filter, Group, Sort Description The work order associated with the sharing entry. This is a relationship field. Relationship Name Parent Relationship Type Lookup

Field Name	Details
	Refers To WorkOrder
RowCause	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort Description Reason that this sharing entry exists. If you're creating a sharing entry, the only permitted value is <code>Manual</code> . If no value is specified, the field defaults to <code>Manual</code> . All other <code>RowCause</code> values are read-only. After the sharing entry is created, this field can't be edited. Valid values include: • <code>Manual</code>—The User or Group has access because a user with "All" access manually shared the work order. • <code>Owner</code>—The User is the owner of the work order. • <code>Rule</code>—The User or Group has access via a work order sharing rule. • <code>GuestRule</code>—The User or Group has access via a work order guest user sharing rule. • <code>LpuImplicit</code>—The User has access to records owned by high-volume Experience Cloud site users via a share group.
UserOrGroupId	Type reference Properties Create, Filter, Group, Sort Description (Read Only) ID of the user or group that has access to the work order. This is a polymorphic relationship field. Relationship Name UserOrGroup Relationship Type Lookup Refers To Group, User

WorkOrderStatus

Represents a possible status of a work order in field service.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
ApiName	Type string Properties Filter, Group, idLookup, Sort Description The API name of the status value.
IsDefault	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates that the status value is the default status on work orders. Only one status value can be the default.
MasterLabel	Type string Properties Filter, Group, Nillable, Sort Description The label for the picklist value that appears in the UI.
SortOrder	Type int Properties Filter, Group, Nillable, Sort Description The value's position in the drop-down list of values in the UI.
StatusCode	Type picklist

Field Name	Details
	Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort
	Description The status category that the value corresponds to. The Status Category field has seven values which are identical to the default Status values.

Usage

The Status field on work orders comes with the following values:

- New—Work order was created, but there hasn't yet been any activity.
- In Progress—Work has begun.
- On Hold—Work is paused.
- Completed—Work is complete.
- Cannot Complete—Work could not be completed.
- Closed—All work and associated activity is complete.
- Canceled—Work is canceled, typically before any work began.

The WorkOrderStatus object corresponds to the Status field. Adding a value to the Status field—for example, Canceled By Customer—creates a work order status record, and vice versa.

 **Note:** Work orders also come with a StatusCategory field whose values are identical to the default Status values. If you create custom Status values, you must indicate which category it belongs to. For example, if you create a *Customer Absent* value, you may decide that it belongs in the *Cannot Complete* category. To learn which processes reference StatusCategory, see [How are Status Categories Used?](#)

WorkPerformanceCycle

Represents feedback that is gathered to assess the performance of a specific set of employees.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
ActivityFrom	Type date
	Properties Create, Filter, Group, Sort, Update

Field Name	Details
	Description The date that you want to start filtering the WDC objects to help requesters create accurate summaries. The start of the evaluation period.
ActivityTo	Type date Properties Create, Filter, Group, Sort, Update Description The date that you want to stop filtering the WDC objects to help requesters create accurate summaries. The end of the evaluation period.
CurrentTask	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The current task that the performance summary cycle is engaged in, including deploying and sharing.
LastManagerRequestsSharedDate	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date when all manager requests are set to be shared.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The time stamp that indicates when the current user last viewed a record that is related to this WorkPerformanceCycle.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field Name	Details
	Description The time stamp that indicates when the current user last viewed this WorkPerformanceCycle. If this value is null, this record might have been only referenced (LastReferencedDate) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the performance summary cycle that employees will participate in. This name is created by the administrator and is visible on all respective notifications and in the UI.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description ID of the owner of the WorkPerformanceCycle.
State	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The state that the performance summary cycle is in. Available pick list values: • Setup: The summary is in draft. • In Progress: The summary is deployed and people are answering the questions that were created. • Finished: The summary is no longer in progress. • Error: The summary encountered an error.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[WorkPerformanceCycleFeed](#)

Feed tracking is available for the object.

[WorkPerformanceCycleHistory](#)

History is available for tracked fields of the object.

WorkPerformanceCycleOwnerSharingRule

Sharing rules are available for the object.

WorkPerformanceCycleShare

Sharing is available for the object.

WorkPlan

Represents a work plan for a work order or work order line item. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
Description	Type textarea Properties Create, Nillable, Update Description The description of the work plan.
ExecutionOrder	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The order in which the work plan is executed. Only positive values or null are supported.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last interacted with this record, directly or indirectly.

Field	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (<code>LastReferencedDate</code>), but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the work plan.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who created the work plan. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ParentRecordId	Type reference Properties Create, Filter, Group, Sort Description The ID of the work order, work order line item, or change request that the work plan is associated with. Available in API version 54.0 and later. This field is a polymorphic relationship field. Relationship Name ParentRecord Relationship Type Lookup

Field	Details
	Refers To ChangeRequest, WorkOrder, WorkOrderLineItem
ParentRecordType	Type string Properties Filter, Group, Nillable, Sort Description Describes whether the parent record is a work order, work order line item, or change request. Available in API version 54.0 and later.
WorkOrderId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Required. The ID of the work order. Relationship Name WorkOrder Relationship Type Lookup Refers To WorkOrder
WorkOrderLineItemId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the work order line item. Relationship Name WorkOrderLineItem Relationship Type Lookup Refers To WorkOrderLineItem
WorkPlanTemplateId	Type reference Properties Filter, Group, Nillable, Sort

Field	Details
	Description The ID of the work plan template record. Available in API version 54.0 and later. This field is a relationship field. Relationship Name WorkPlanTemplate Relationship Type Lookup Refers To WorkPlanTemplate

Associated Objects

This object has these associated objects. Unless noted, they're available in the same API version as this object.

WorkPlanChangeEvent on page 68

Change events are available for the object. Available in API version 54.0 and later.

WorkPlanFeed on page 55

Feed tracking is available for the object.

WorkPlanHistory on page 63

History is available for tracked fields of the object.

WorkPlanOwnerSharingRule on page 65

Sharing rules are available for the object.

WorkPlanShare on page 67

Sharing is available for the object.

WorkPlanSelectionRule

Represents a rule that selects a work plan for a work order or work order line item. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
AssetId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the asset.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The description of the selection rule.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Controls whether this selection rule is active (<code>true</code>) or not (<code>false</code>). Default is <code>false</code>. Label is Active.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last interacted with this record, directly or indirectly.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (<code>LastReferencedDate</code>), but not viewed it.
LocationId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the location.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner.
Product2Id	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the product. Label is Product.
ServiceTerritoryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the service territory.
WorkPlanSelectionRuleNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The auto-generated number of the work plan selection rule, for example, WPSR-0001.
WorkPlanTemplateId	Type reference Properties Create, Filter, Group, Sort, Update Description Required. The ID of the work plan template.
WorkTypeId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The ID of the work type.

Associated Objects

This object has these associated objects. Unless noted, they're available in the same API version as this object.

[WorkPlanSelectionRuleChangeEvent](#)

Change events are available for the object.

[WorkPlanSelectionRuleFeed](#)

Feed tracking is available for the object.

[WorkPlanSelectionRuleHistory](#)

History is available for tracked fields of the object.

[WorkPlanSelectionRuleOwnerSharingRule](#)

Sharing rules are available for the object.

[WorkPlanSelectionRuleShare](#)

Sharing is available for the object.

WorkPlanTemplate

Represents a template for a work plan. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
Description	Type textarea
	Properties Create, Nillable, Update

Field	Details
	Description The description of the work plan template.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Controls whether the specific template is available for application (<code>true</code>) or not (<code>false</code>). Default is <code>false</code> . Label is Active.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last interacted with this record, directly or indirectly.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (<code>LastReferencedDate</code>), but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The user-defined name of the work plan template.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner who created the work plan template.

Field	Details
RelativeExecutionOrder	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The relative execution order for sorting the work plan when it's applied to the work order or work order line item. Only positive integers are supported.

Associated Objects

This object has these associated objects. Unless noted, they're available in the same API version as this object.

[WorkPlanTemplateChangeEvent](#)

Change events are available for the object.

[WorkPlanTemplateFeed](#)

Feed tracking is available for the object.

[WorkPlanTemplateHistory](#)

History is available for tracked fields of the object.

[WorkPlanTemplateOwnerSharingRule](#)

Sharing rules are available for the object.

[WorkPlanTemplateShare](#)

Sharing is available for the object.

WorkPlanTemplateEntry

Represents an object that associates a work step template with a work plan template. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
ExecutionOrder	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The sequence number of when this entry is executed. Only positive values are supported.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last interacted with this record, directly or indirectly.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (LastReferencedDate), but not viewed it.
WorkPlanTemplateEntryNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The auto-generated number of the work plan template entry, for example, WPTE-0001.
WorkPlanTemplateId	Type reference Properties Create, Filter, Group, Sort Description Required. The ID of the work plan template.
WorkStepTemplateId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort, Update
	Description Required. The ID of the work step template.

Associated Objects

This object has these associated objects. Unless noted, they're available in the same API version as this object.

[WorkPlanTemplateEntryChangeEvent](#)

Change events are available for the object.

[WorkPlanTemplateEntryFeed](#)

Feed tracking is available for the object.

[WorkPlanTemplateEntryHistory](#)

History is available for tracked fields of the object.

WorkReward

Used to store reward codes tied to a Reward Fund. Reward Funds must have at least one WorkReward record.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You must have the Reward permission enabled in order to use the Rewards feature, including WorkRewardFund and WorkReward.

Additional Considerations and Related Objects

WorkReward is a lookup to WorkRewardFund. WorkRewardFund must have at least one WorkReward record to be available for use. Each WorkBadge record with a `RewardId` indicates a reward badge given to a Recipient.

Fields

Field Name	Details
Code	Type string
	Properties Create, Filter, Group, Sort, Update

Field Name	Details
	Description Represents a single reward code tied to a RewardFundId.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Represents the User ID of Owner of WorkReward record
RecipientId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Salesforce User ID for User associated with this WorkReward record.
RedemptionDisclaimer	Type textarea Properties Nillable Description The disclaimer information about the WorkReward.
RedemptionInfo	Type textarea Properties Nillable Description The instructions for redeeming the WorkReward.
RedemptionUrl	Type textarea Properties Nillable Description The URL for redeeming the WorkReward.
RewardFundId	Type reference Properties Create, Filter, Group, Sort, Update

Field Name	Details
	Description Salesforce unique ID for WorkRewardFund record that is associated with WorkReward record.
RewardFundTypeId	Type reference Properties Create, Filter, Group, Sort, Update Description Salesforce unique ID of the WorkRewardFundType associated with the WorkReward.
Value	Type double Properties Filter, Nillable, Sort Description The value of the WorkReward.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

WorkRewardHistory

History is available for tracked fields of the object.

The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

WorkRewardOwnerSharingRule

Sharing rules are available for the object.

The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

WorkRewardShare

Sharing is available for the object.

WorkRewardFund

Represents a Reward Fund and describes the Reward Fund attributes.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To use the Rewards feature, including WorkRewardFund and WorkReward, you must have the Reward permission enabled. To create Rewards, the user must have Create on WorkRewardFund, which is not a standard permission.

Additional Considerations and Related Objects

WorkReward is a lookup to WorkRewardFund. WorkRewardFund must have at least one WorkReward record available. Each WorkBadgeDefinition with a RewardFundId is a "Reward Badge."

Fields

Field Name	Details
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the WorkRewardFund is active (<code>true</code>) or not (<code>false</code>).
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The time stamp that indicates when the current user last viewed a record that is related to this WorkRewardFund.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The time stamp that indicates when the current user last viewed this WorkRewardFund. If this value is null, this record might have been only referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. Name of the Reward Fund.

Field Name	Details
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Salesforce unique ID of User who is the Owner of the WorkRewardFund record.
RewardFundTypeId	Type reference Properties Create, Filter, Group, Sort, Update Description Salesforce unique ID of the WorkRewardFundType that is associated with the WorkRewardFund.
TotalCodeCount	Type int Properties Filter, Group, Nillable, Sort Description Total reward codes that are available in the WorkRewardFund. Derived from WorkReward records that are associated with the WorkRewardFund.
Type	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description RewardType of the WorkRewardFund. Default is Amazon.com.
UsedCodeCount	Type int Properties Filter, Group, Nillable, Sort Description Total reward codes that are used in the WorkRewardFund. Derived from the total assigned WorkReward records that are associated with the WorkRewardFund.
Value	Type currency Properties Create, Filter, Sort, Update

Field Name	Details
	Description Value of each of the reward codes in the WorkRewardFund.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

WorkRewardFundFeed

Feed tracking is available for the object.

WorkRewardFundHistory

History is available for tracked fields of the object.

The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

WorkRewardFundOwnerSharingRule

Sharing rules are available for the object.

The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

WorkRewardFundShare

Sharing is available for the object.

WorkRewardFundType

Represents the type of WorkRewardFund object.



Note: The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
CreditSystem	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update

Field Name	Details
	Description The credit system that is used by the WorkRewardFundType object (gift codes or points). If points are selected, the reward message will not consider the <code>CurrencyCode</code> field.
CurrencyCode	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The currency code of the WorkRewardFundType
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Whether the WorkRewardFundType is active and available in the UI
IsPredefined	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Whether the WorkRewardFundType is predefined (<code>true</code>) or not (<code>false</code>)
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The time stamp that indicates when the current user last viewed a record that is related to this WorkRewardFundType.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The time stamp that indicates when the current user last viewed this WorkRewardFundType. If this value is null, this record might have been only referenced (<code>LastReferencedDate</code>) and not viewed.

Field Name	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the WorkRewardFundType
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the WorkRewardFundType owner
RedemptionDisclaimer	Type textarea Properties Create, Nillable, Update Description The redemption disclaimer text for the WorkRewardFundType
RedemptionInfo	Type textarea Properties Create, Nillable, Update Description Redemption text for the WorkRewardFundType
RedemptionUrl	Type textarea Properties Create, Nillable, Update Description The URL that's linked to the redemption
UploadCodeColumn	Type int Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The column where the reward code is contained in the CSV file. The upload uses the second value by default.
UploadValueColumn	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The column where the reward value is contained in the CSV file. The upload uses the third column by default.

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

WorkRewardFundTypeFeed

Feed tracking is available for the object.

WorkRewardFundTypeHistory

History is available for tracked fields of the object.

The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

WorkRewardFundTypeOwnerSharingRule

Sharing rules are available for the object.

The original WDC feature is unavailable as of Spring '22. This object isn't available as of API version 54.0. For more information, see [Phased WDC \(legacy Work.com\) Feature Retirement](#).

WorkRewardFundTypeShare

Sharing is available for the object.

WorkStep

Represents a work step in a work plan. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
ActionDefinition	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The platform action that the work step executes. The possible values are the names of the flow and quick actions configured in your org. To launch Lightning Web Components from Work Steps, you must use <code>QuickAction</code> on the action definition.
ActionType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of platform action that the work step is associated with. Possible values are: • <code>Flow</code> • <code>QuickAction</code>
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description The description of the work step.
EndTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time the work step ends. The value must be greater than or equal to <code>StartTime</code>.
ExecutionOrder	Type int Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The order in which the work step is executed. Only positive integer values or null are supported.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last interacted with this record, directly or indirectly.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (LastReferencedDate), but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Required. The user-defined name of the work step.
PausedFlowInterviewId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The auto-populated ID of the flow interview paused by a user.
ProcessType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The flow process type launched from the work step. Possible values are:

Field	Details
	• DataCaptureFlow—Data Capture Flow • DiscoveryFrameworkFlow—Discovery Framework Data Capture Flow (Beta) • FieldServiceMobileFlow—Field Service Mobile Flow The default value is DataCaptureFlow.
StartTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time the work step starts.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The customizable status of the work order. Every status must be mapped to a status category, but there can be status categories not mapped to a status. Possible values are: • Completed • In Progress • New • Not Applicable • Paused
StatusCategory	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The category that each status value belongs to. Each default status category is mapped to the corresponding default status. If you create a custom status, you must indicate which status category it belongs to. To learn which processes reference StatusCategory, see How are Status Categories Used?. Possible values are: • Completed • InProgress • New • NotApplicable

Field	Details
	Paused
WorkOrderId	Type reference Properties Filter, Group, Sort Description The ID of the work order.
WorkOrderLineItemId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the work order line item.
WorkPlanExecutionOrder	Type int Properties Filter, Group, Nillable, Sort Description The ID of the plan execution order.
WorkPlanId	Type reference Properties Create, Filter, Group, Sort Description The ID of the work plan.

Associated Objects

This object has these associated objects. Unless noted, they're available in the same API version as this object.

[WorkStepChangeEvent](#)

Change events are available for the object.

[WorkStepFeed](#)

Feed tracking is available for the object.

[WorkStepHistory](#)

History is available for tracked fields of the object.

WorkStepStatus

Represents a picklist for a status category on a work step. This object is available in API version 52.0 and later.

Supported Calls

`describeSObjects()`, `query()`, `retrieve()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
ApiName	Type string Properties Filter, Group, idLookup, Sort Description Required. The name of the work step status.
IsDefault	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Controls whether this status is the default value of the picklist of the corresponding status category (<code>true</code>) or not (<code>false</code>). Default is <code>false</code> .
MasterLabel	Type string Properties Filter, Group, Nillable, Sort Description Required. The label of the work step status.
SortOrder	Type int Properties Filter, Group, Nillable, Sort

Field	Details
	Description Required. The order in which the work step statuses are displayed in the status category's picklist.
StatusCode	Type picklist Properties Required. Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The status category that this status belongs to. Possible values are: - Completed - InProgress - New - NotApplicable - Paused

WorkStepTemplate

Represents a template for a work step. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field	Details
ActionDefinition	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description The platform action that the work step executes. The possible values are the names of the flow and quick actions configured in your org.
ActionType	Type picklist Properties Filter, Group, Nillable, Restricted picklist, Sort Description The type of platform action that the work step is associated with. Possible values are: • Flow • QuickAction
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description The description of the work step template.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Controls whether this work step template is active <code>true</code> or not <code>false</code> . Default is <code>false</code> .
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp when the current user last interacted with this record, directly or indirectly.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp when the current user last viewed this record or list view. If this value is null, it's possible that the user only accessed this record or list view (<code>LastReferencedDate</code>), but not viewed it.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The user-defined name of the work step template.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the owner who created the work step template.

Associated Objects

This object has these associated objects. Unless noted, they're available in the same API version as this object.

[WorkStepTemplateChangeEvent](#)

Change events are available for the object.

[WorkStepTemplateFeed](#)

Feed tracking is available for the object.

[WorkStepTemplateHistory](#)

History is available for tracked fields of the object.

[WorkStepTemplateOwnerSharingRule](#)

Sharing rules are available for the object.

[WorkStepTemplateShare](#)

Sharing is available for the object.

WorkThanks

Represents the source and message of a thanks post.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Additional Considerations and Related Objects

WorkBadge is a lookup to WorkThanks. Each WorkBadge record must derive a SourceId from WorkThanks.

Fields

Field Name	Details
FeedItemId	Type reference Properties Filter, Group, Nillable, Sort Description ID of the FeedItem related to the thanks badge. This is a relationship field. Relationship Name FeedItem Relationship Type Lookup Refers To FeedItem
GiverId	Type reference Properties Create, Filter, Group, Sort Description Salesforce user ID for the giver of the Thanks record. This is a relationship field. Relationship Name Giver Relationship Type Lookup Refers To User
Message	Type textarea Properties Create Description Required. Message associated with the Thanks record.

Field Name	Details
NetworkId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the community that this WorkThanks is associated with. This field is available only if digital experiences is enabled in your org.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Salesforce user ID for the owner of the badge record (typically the same user as the giver of the record). This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

WorkThanksChangeEvent (API version 62.0)

Change events are available for the object.

WorkThanksOwnerSharingRule

Sharing rules are available for the object.

WorkThanksShare

Sharing is available for the object.

WorkType

Represents a type of work to be performed in Field Service and Lightning Scheduler. Work types are templates that can be applied to work order or work order line items. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Field Service must be enabled.

Fields

Field Name	Details
Description	Type textarea Properties Create, Nillable, Update Description The description of the work type. Try to add details about the task or tasks that this work type represents.
DurationType	Type picklist Properties Create, Filter, Group, Defaulted on create, Restricted picklist, Sort, Update Description The unit of the <code>Estimated Duration</code>: Minutes or Hours.
EstimatedDuration	Type double Properties Create, Filter, Sort, Update Description The estimated length of the work. The estimated duration is in minutes or hours based on the value selected in the <code>Duration Type</code> field.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the work type was last modified. Its label in the user interface is <code>Last Modified Date</code>.

Field Name	Details
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the work type was last viewed by the current user.
MinimumCrewSize	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The minimum crew size allowed for a crew assigned to the work. Work orders and work order line items inherit their work type's minimum crew size. If you're not using the Field Service managed package, this field serves as a suggestion rather than a rule. If you are using the managed package, the scheduling optimizer counts the number of service crew members on a service crew to determine whether it fits the minimum crew size requirement.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the work type. Try to use a name that helps users quickly understand the type of work orders that can be created from the work type. For example, "Annual Refrigerator Maintenance" or "Valve Replacement."
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The work type's owner. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User

Field Name	Details
RecommendedCrewSize	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The recommended number of people on the service crew assigned to the work. For example, you might have a Minimum Crew Size of 2 and a Recommended Crew Size of 3. Work orders and work order line items inherit their work type's recommended crew size.
SaDocumentTemplate	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The document template ID. If <code>ServiceDocumentTemplateId</code> isn't specified, this document template ID determines which service document template is used for service documents generated from a service appointment. The ID is 15 to 18 characters long.
ServiceReportTemplateId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The service report template associated with the work type. When users create service reports from a work order or work order line item that uses this work type, the reports use this template.
ShouldAutoCreateSvcAppt	Type boolean Properties Create, Filter, Group, Defaulted on create, Sort, Update Description Select this option to have a service appointment automatically created on work orders and work order line items that use the work type.  Note: - By default, the Due Date on auto-created service appointments is seven days after the created date. Admins can adjust this offset from the Field Service Settings page in Setup. - If a work type with the Auto-Create Service Appointment option selected is added to an existing work order or work order line item, a

Field Name	Details
	service appointment is only created for the work order or work order line item if it doesn't yet have one. If someone updates an existing work type by selecting the Auto-Create Service Appointment option, service appointments aren't created on work orders and work order line items that were already using the work type.
WoDocumentTemplate	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The document template ID. If <code>ServiceDocumentTemplateId</code> isn't specified, this document template ID determines which service document template is used for service documents generated from a work order. The ID is 15 to 18 characters long.
WoliDocumentTemplate	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The document template ID. If <code>ServiceDocumentTemplateId</code> isn't specified, this document template ID determines which service document template is used for service documents generated from a work order line item. The ID is 15 to 18 characters long.

Usage

Adding a work type to a work order or work order line item causes the record to inherit the work type's duration values and required skills and products.



Note:

- If needed, you can update the duration values and required skills and products on a work order or work order line item after they're inherited from the work type.
- If a work order or work order line item already has required skills or products, associating it with a work type doesn't cause it to inherit the work type's requirements.
- If a work order or work order line item already has a duration value in its `Duration` field, associating it with a work type doesn't cause it to inherit the work type's duration value.
- Customizations to required skills or products, such as validation rules or Apex triggers, are not carried over from work types to work orders and work order line items.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

WorkTypeChangeEvent (API version 48.0)

Change events are available for the object.

WorkTypeFeed

Feed tracking is available for the object.

WorkTypeHistory

History is available for tracked fields of the object.

WorkTypeOwnerSharingRule

Sharing rules are available for the object.

WorkTypeShare

Sharing is available for the object.

WorkTypeGroup

Represents a grouping of work types used to categorize types of appointments available in Lightning Scheduler, or to define scheduling limits in Field Service. This object is available in API version 45.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AdditionalInformation	Type multipicklist Properties Create, Filter, Nillable, Update Description Additional information about the types of appointments this work type group represents.
Description	Type textarea Properties Create, Nillable, Update Description A description of this work type group.

Field	Details
GroupType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The category of this work type group. Possible values are: • Capacity—A group of work types used to define a work capacity limit in Field Service. • Default—A non-capacity group of work types used in Lightning Scheduler.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this work type group can be used for appointment scheduling or work capacity limits. A work type can belong to only one active work type group of type Capacity.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the current user last viewed a record related to this object.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this object.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of this work type group.
OwnerId	Type reference

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who created this record. This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

[WorkTypeGroupFeed](#)

Feed tracking is available for the object.

[WorkTypeGroupHistory](#)

History is available for tracked fields of the object.

[WorkTypeGroupOwnerSharingRule](#)

Sharing rules are available for the object.

[WorkTypeGroupShare](#)

Sharing is available for the object.

WorkTypeGroupMember

Represents the relationship between a work type and the work type group it belongs to. This object is available in API version 45.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
<code>LastReferencedDate</code>	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The date and time that the current user last viewed a record related to this object.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this object.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Autogenerated number identifying the work type group membership. It uses the format #####.
WorkTypeGroupId	Type reference Properties Create, Filter, Group, Sort Description The ID of the work type group that this record belongs to. This is a relationship field. Relationship Name WorkTypeGroup Relationship Type Lookup Refers To WorkTypeGroup
WorkTypeId	Type reference Properties Create, Filter, Group, Sort Description The ID of the work type that this record corresponds to. This is a relationship field.

Field	Details
	Relationship Name WorkType
	Relationship Type Lookup
	Refers To WorkType

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

WorkTypeGroupMemberFeed
Feed tracking is available for the object.

WorkTypeGroupMemberHistory
History is available for tracked fields of the object.

CHAPTER 7 Data Model

Entity relationship diagrams (ERDs) for standard Salesforce objects illustrate important relationships between objects. Salesforce ERDs use crow's foot notation.



[other]: ERDs are hosted in the [Data Model Gallery](#). The Salesforce Data Model Gallery is a curated collection of diagrams that illustrate the underlying data models for Salesforce products, features, and clouds. It's a resource designed to support customers, developers, solution engineers, and data architects in understanding how data is structured across Salesforce — enabling better solution design, integration planning, and implementation strategy.

The data model for your custom objects depends on what you create.

INDEX

A

AccountInsight object [290](#)
AccountUserTerritory2View object [344](#)
AnalyticsLicensedAsset object [547](#)

B

Big Objects
 Composite primary key [33](#)
 Custom Big Object [33](#)
 Defining [33](#)
 Deploying [33](#)
 Index [33](#)
 Overview [31](#)

C

ContactSuggestionInsight object [1460](#)

D

Data access
 standard objects [27](#)
Delegated Account Objects [1850](#)

E

Electronic_Media_Group_object [1913](#)
Electronic_Media_Use_object [1915](#)
External Account Hierarchy History Object [2495](#)
External_Account_Hierarchy_object [2493](#)
ExternalSocialAccount object [2513](#)

F

FormulaFunction object [2811](#)
FormulaFunctionCategory object [2814](#)
Freeze users [5641](#)

H

HealthCareDiagnosis object [2903](#)
HealthCareProcedure object [2908](#)

I

IframeWhiteListUrl object [2934](#)

L

LandingPage object [3062](#)

M

Managed_Content [3381](#)
Managed_Content_Channel [3383](#)
Managed_Content_Channelobject [3383](#)
Managed_Content_Info_object [3386](#)
Managed_Content_object [3381](#)
Managed_Content_Variant [3388](#)
Managed_Content_Variant_object [3388](#)
MarketingForm object [3391](#)
MarketingLink object [3395](#)

O

Object_name object [4813](#)
ObjectPermissions object [3598](#)
Objects
 AccountInsight [290](#)
 AccountUserTerritory2View [344](#)
 AnalyticsLicensedAsset [547](#)
 ContactSuggestionInsight [1460](#)
 Electronic_Media_Group [1913](#)
 Electronic_Media_Use [1915](#)
 External_Account_Hierarchy [2493](#)
 ExternalSocialAccount [2513](#)
 FormulaFunction [2811](#)
 FormulaFunctionCategory [2814](#)
 HealthCareDiagnosis [2903](#)
 HealthCareProcedure [2908](#)
 IframeWhiteListUrl [2934](#)
 LandingPage [3062](#)
 LightningExperienceTheme [3159](#)
 Managed_Content_Info [3386](#)
 MarketingForm [3391](#)
 MarketingLink [3395](#)
 Object_name [4813](#)
 ObjectPermissions [3598](#)
 OmniSupervisorConfig [3611](#)
 OmniSupervisorConfigAction [3613](#)
 OmniSupervisorConfigGroup [3614](#)
 OmniSupervisorConfigProfile [3615](#)
 OmniSupervisorConfigUser [3620](#)
 OpportunityContactRoleSuggestionInsight [3657](#)
 OpportunityInsight [3664](#)
 PermissionSet [4145](#)
 PermissionSetGroup [4132, 4135](#)
 Product_Attribute [4332](#)

Objects (*continued*)

- Product_Attribute_Set [4333](#)
- Product_Attribute_Set_Item [4335](#)
- Product_Attribute_Set_Product [4336](#)
- Product_Category [4340](#), [4343](#)
- Product_Media [4365](#)
- Prompt [4478](#), [4491](#)
- PromptAction [4469](#), [4473](#)
- PromptActionOwnerSharingRule [4475](#)
- PromptActionShare [4476](#), [4480](#)
- Recommendation [4624](#)
- Sales_Store_Catalog [4792](#)
- SocialPersona [5098](#)
- SocialPost [5104](#)
- SurveyQuestionScore [5170](#)
- UiFormulaCriterion [5466](#)
- UiFormulaRule [5467](#)
- VoiceCallQualityFeedback [5801](#)
- WebStore [5867](#), [5891](#)
- WebStoreCatalog [5879](#)
- OmniSupervisorConfig object [3611](#)
- OmniSupervisorConfigAction object [3613](#)
- OmniSupervisorConfigGroup object [3614](#)
- OmniSupervisorConfigProfile object [3615](#)
- OmniSupervisorConfigUser object [3620](#)
- OpportunityContactRoleSuggestionInsight object [3657](#)
- OpportunityInsight object [3664](#)

P

PermissionSetGroup object [4132](#)

PermissionSetGroupComponent object [4135](#)

PermissionSetTabSetting object [4145](#)

Product_Attribute_object [4332](#)

Product_Attribute_Set_Item_object [4335](#)

Product_Attribute_Set_object [4333](#)

Product_Attribute_Set_Product_object [4336](#)

Product_Category_object [4340](#), [4343](#)

Product_Media_object [4365](#)

R

Recommendation object [4624](#)

S

Sales_Store_Catalog_object [4792](#)

SocialPersona object [5098](#)

SocialPost object [5104](#)

Standard objects

- data access [27](#)

SurveyQuestionScore object [5170](#)

U

UiFormulaCriterion object [5466](#)

UiFormulaRule object [5467](#)

V

VoiceCallQualityFeedback object [5801](#)

W

WebStore object [5867](#), [5891](#)

WebStoreCatalog_object [5879](#)