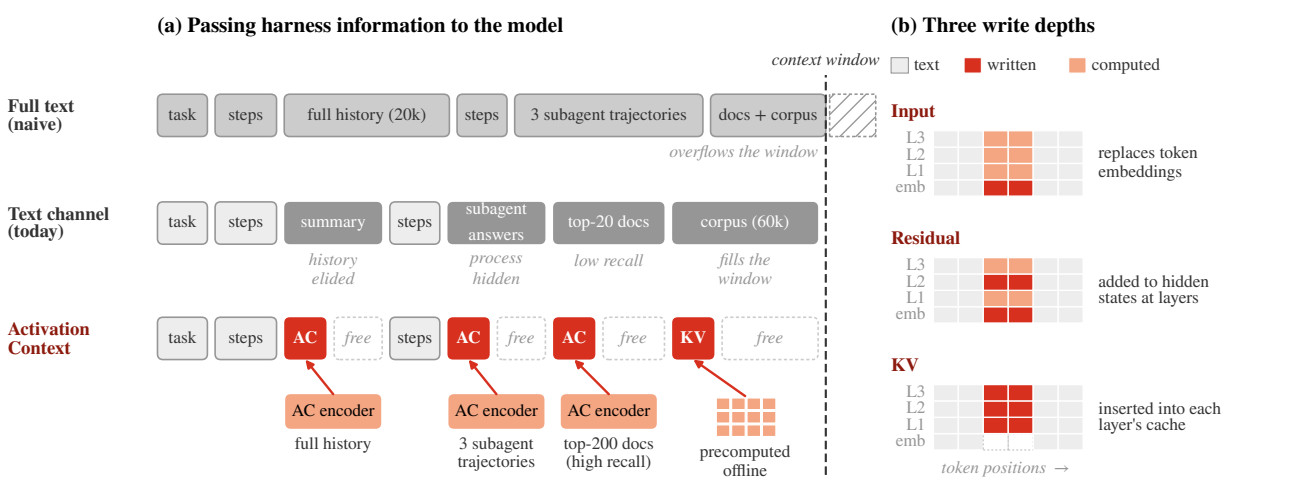
(a) Passing harness information to the model
(b) Three write depths
context window
Full text (naive)
task
steps
full history (20k)
steps
3 subagent trajectories
docs + corpus
overflows the window
Text channel (today)
task
steps
summary
steps
subagent answers
top-20 docs
corpus (60k)
history elided
process hidden
low recall
fills the window
Activation Context
task
steps
AC
free
steps
AC
free
AC
free
KV
free
AC encoder
full history
AC encoder
3 subagent trajectories
AC encoder
top-200 docs (high recall)
precomputed offline
text
written
computed
Input
L3
L2
L1
emb
replaces token embeddings
Residual
L3
L2
L1
emb
added to hidden states at layers
KV
L3
L2
L1
emb
inserted into each layer's cache
token positions →