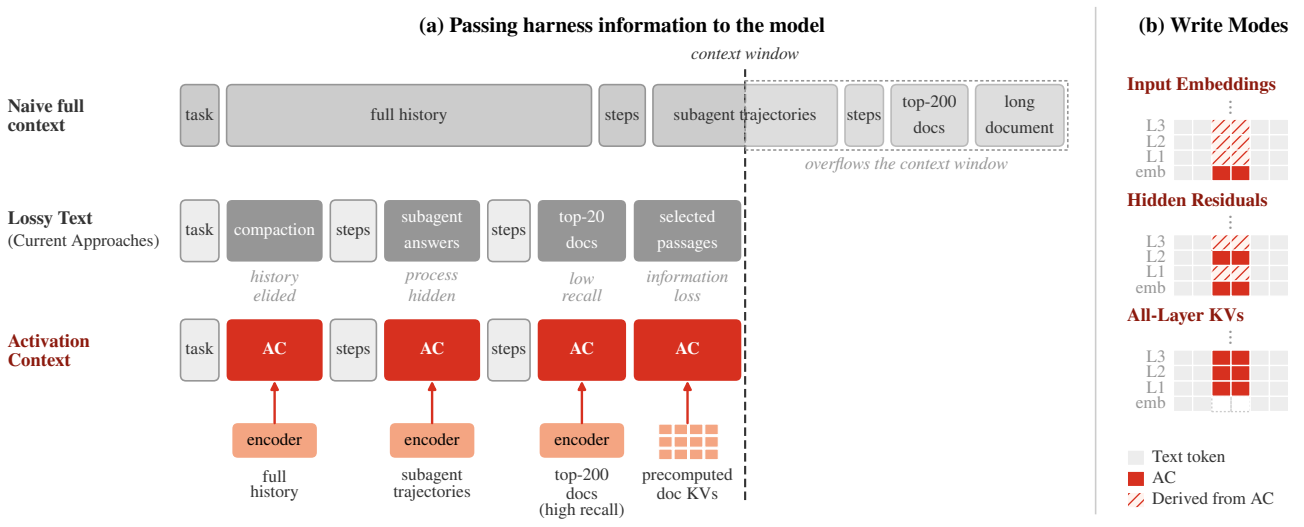
(a) Passing harness information to the model
context window
Naive full context
task
full history
steps
subagent trajectories
steps
top-200 docs
long document
overflows the context window
Lossy Text
(Current Approaches)
task
compaction
steps
subagent answers
steps
top-20 docs
selected passages
history elided
process hidden
low recall
information loss
Activation Context
task
AC
steps
AC
steps
AC
AC
encoder
encoder
encoder
full history
subagent trajectories
top-200 docs (high recall)
precomputed doc KVs
(b) Write Modes
Input Embeddings
L3
L2
L1
emb
Hidden Residuals
L3
L2
L1
emb
All-Layer KVs
L3
L2
L1
emb
Text token
AC
Derived from AC