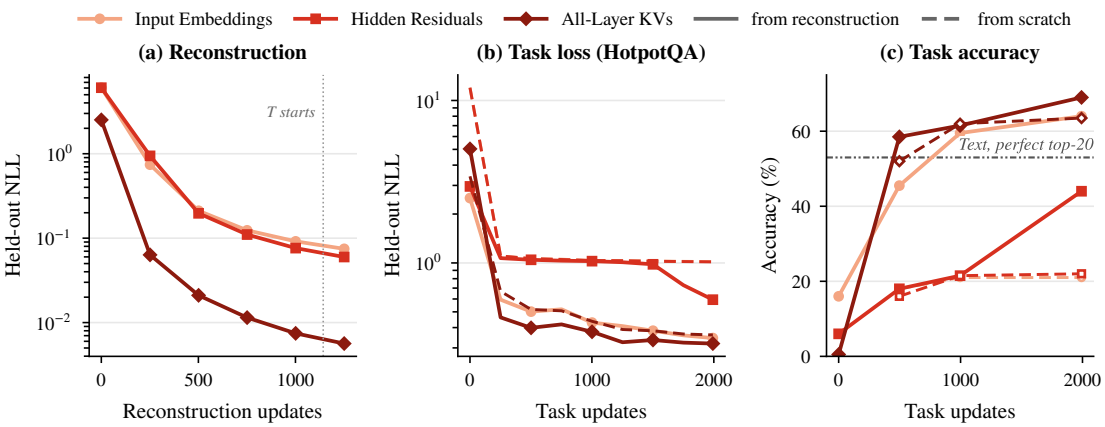
Input Embeddings
Hidden Residuals
All-Layer KVs
from reconstruction
from scratch
(a) Reconstruction
T starts
Held-out NLL
10^0
10^{-1}
10^{-2}
0
500
1000
Reconstruction updates
(b) Task loss (HotpotQA)
Held-out NLL
10^1
10^0
0
1000
2000
Task updates
(c) Task accuracy
Text, perfect top-20
Accuracy (%)
0
20
40
60
0
1000
2000
Task updates