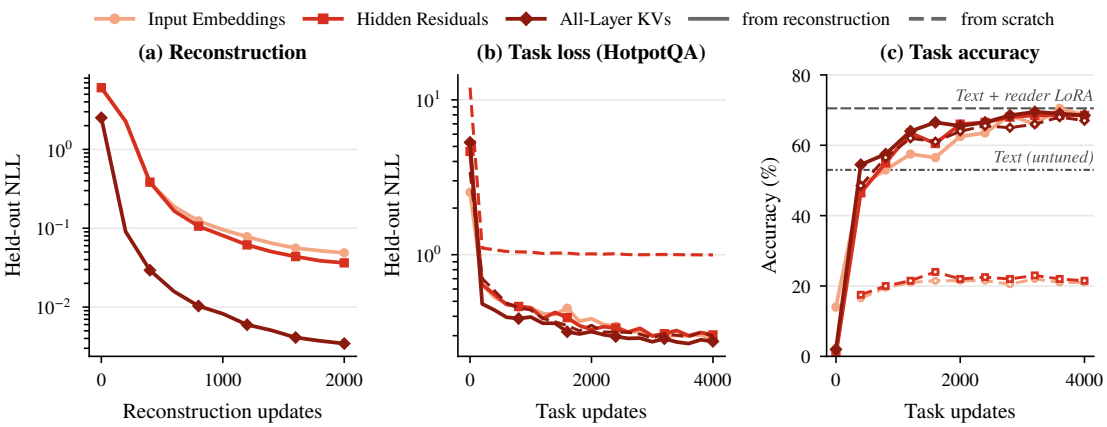
Input Embeddings
Hidden Residuals
All-Layer KVs
from reconstruction
from scratch
(a) Reconstruction
Held-out NLL
10^{0}
10^{-1}
10^{-2}
0
1000
2000
Reconstruction updates
(b) Task loss (HotpotQA)
Held-out NLL
10^{1}
10^{0}
0
2000
4000
Task updates
(c) Task accuracy
Accuracy (%)
80
60
40
20
0
Text + reader LoRA
Text (untuned)
0
2000
4000
Task updates