Fetch Documents From Digilocker API

ind_digilocker_fetch_documents

Fetch Documents From Digilocker API **1**
Digilocker Documents Fetch API (v2): 2
Description 2
IDfy Request Headers [POST]: 2
IDfy Request URL [POST]: 2
Request parameters: 3
IDfy Request Body [POST] (Aadhaar Fetch): 4
IDfy Request Body [POST] (PAN Fetch) 5
IDfy - EVE Response Body 6
IDfy - EVE Response Parameters 7
Digilocker Webhook Response Body (Aadhaar Fetch) 8
Digilocker Webhook Response Body (PAN Fetch) 9
Digilocker Response Parameters: 10
Digilocker Webhook Errors 12
1. If user clicks on “Deny” button on consent screen 12
2. If user unchecks the Aadhaar checkbox and then clicks on “Allow” button on consent screen 12
3. Something went wrong at digilocker’s end 13
4. If incorrect PAN number is provided for PAN fetch 13
IDfy - EVE Error codes: 14
1. If session for given reference_id already exists 14
2. If the source is down 14
3. Other common error codes 15
Digilocker Verification process: 16
Digilocker Consent Flow - User Experience 17
Digilocker Integration steps: 20
Webview Implementation Overview 20
Permissions and Features 20
Suggestions for Webview Journey 21
General Instructions for Webview Implementation 21
Additional Resources 22

Digilocker Documents Fetch API (v2):

Description

This API is used to fetch documents from digilocker, based on end user's consent. The document retrieved will be in xml file format. It can extract user's aadhaar or pan documents from digilocker.
This new version of digilocker API now supports login directly through mobile number, without requiring the digilocker pin. Also, it supports redirection to client journey

IDfy Request Headers [POST]:

```
None
'account-id: {{account_id}}'
'api-key: {{api_key}}'
'Content-Type: application/json'
```

IDfy Request URL [POST]:

```
None
https://eve.idfy.com/v3/tasks/sync/verify_with_source/ind_digilocker_fetch_documents
```

Request parameters:

Key	Datatype	Mandatory	Description	Validation
task_id	String	Yes	Unique identifier for the task	Must be a valid UUID
group_id	String	Yes	Identifier for the group	Must be a valid UUID
data	Object	Yes	Container for the data	Must be a valid JSON object
data.reference_id	String	Yes	Unique_reference_id(ideally unique for each session)	Must be a unique string
data.key_id	String	Yes	key_id shared by IDfy	
data.ou_id	String	Yes	ou_id shared by IDfy	
data.secret	String	Yes	Secret key shared by IDfy	Must be a base64 encoded string
data.callback_url	String	Yes	Webhook callback URL for receiving callback response from digilocker	Must be a valid webhook URL. The digilocker response will be received on this webhook
data.doc_type	String/Array	Yes	Document type needed to be fetched from digilocker	String format: “ADHAR”: for aadhaar card “PANCR”: for pan card
data.file_format	String	Yes	“xml”	The response from digilocker will be received in XML file format
data.extra_fields	Object	Yes	Extra fields required for digilocker authentication	Empty in case of aadhaar, and respective search parameters in case of any other document. In case of “PANCR”: extra_fields={"panno":"PAN-NUMBER", "PANFullName": "FULL NAME ON PAN CARD" }

“key_id”, “ou_id”, and “secret” must be of the same combination as shared by IDfy.

IDfy Request Body [POST] (Aadhaar Fetch):

```
None
{
    "task_id": "74f4c926-250c-43ca-9c53-453e87ceacd1",
    "group_id": "8e16424a-58fc-4ba4-ab20-5bc8e7c3c41e",
    "data": {
        "version": "2",
        "reference_id": "unique_ref_id",
        "key_id": "<key-id>",
        "ou_id": "<ou-id>",
        "secret": "<base64-encoded-string>",
        "callback_url": "Webhook URL to receive Aadhaar data from
DigiLocker",
        "redirect_url": "URL where you want the user to get
redirected after completion of digilocker journey",
        "doc_type": "ADHAR",
        "file_format": "xml",
        "extra_fields": {}
    }
}
```

IDfy Request Body [POST] (PAN Fetch)

None

```
{
   "task_id": "74f4c926-250c-43ca-9c53-453e87ceacd1",
   "group_id": "8e16424a-58fc-4ba4-ab20-5bc8e7c3c41e",
   "data":
       {
       "version": "2",
        "reference_id": "unique_ref_id",
        "key_id": "<key-id>",
        "ou_id": "<ou-id>",
        "secret": "<base64-encoded-string>",
        "callback_url": "Webhook URL to receive Aadhaar data from
DigiLocker",
        "redirect_url": "URL where you want the user to get
redirected after completion of digilocker journey",
       "doc_type": "PANCR",
       "file_format": "xml",
       "extra_fields": {"panno":"PAN-NUMBER", "PANFullName":
"FULL NAME ON PAN CARD"}
       }
}
```

IDfy - EVE Response Body

None


```
{
    "action": "verify_with_source",
    "completed_at": "2024-07-12T10:51:19+05:30",
    "created_at": "2024-07-12T10:51:19+05:30",
    "group_id": "8e16424a-58fc-4ba4-ab20-5bc8e7c3c41e",
    "request_id": "ae5adf8f-c851-43b3-bf8a-d6990d9e7789",
    "result": {
        "source_output": {
            "redirect_url": "<digilocker redirect url>",
            "reference_id": "unique_ref_id2",
            "session_exists": false,
            "status": "success"
        }
    },
    "status": "completed",
    "task_id": "74f4c926-250c-43ca-9c53-453e87ceacd1",
    "type": "ind_digilocker_fetch_documents"
}
```

IDfy - EVE Response Parameters

Key	Datatype	Description	Validation
action	String	Action taken for the request	A valid string. Value: “verify_with_source”
completed_at	String	Timestamp when the action was completed	A valid datetime in ISO 8601 format
created_at	String	Timestamp when the request was created	A valid datetime in ISO 8601 format
group_id	String	Identifier for the group	A valid UUID
request_id	String	Identifier for the request	A valid UUID
result	Object	Container for the result	A valid JSON object
result.source_output	object	Contains the output details from the source.	Must be a valid JSON object
result.source_output.redirect_url	string	URL to redirect for document fetching.	Must be a valid URL
result.source_output.reference_id	string	Unique reference identifier for the session.	Must be a valid string.
result.source_output.session_exists	Bool	Indicates if the session already exists.	Must be true or false.
result.source_output.status	string	Status of the source output.	
status	String	Status of the response	A valid string
task_id	String	The unique identifier of a requested task provided by you	a valid UUID
type	String	Type of request	Value: “ind_digilocker_fetch_documents”

Digilocker Webhook Response Body (Aadhaar Fetch)

None


```
{
"doc_type":"ADHAR",
"download_url":"<URL to download aadhaar details in xml format>",
"file_format":"xml",
"h":"36a9e33dc8e18f3283ace0e48e3ad38547b86af7",
"parsed_details":{
      "co":"<CARE OF (eg. FATHER'S NAME)>",
      "country":"India",
      "dist":"<DISTRICT>",
      "dob":"<DOB IN YYYY-MM-DD FORMAT>",
      "gender":"M",
      "generated_at":"2024-07-12T15:47:18.050+05:30",
      "house":"",
      "lang":"",
      "lm":"<LANDMARK>",
      "loc":"<LOCALITY>",
      "name":"<NAME ON AADHAAR CARD>",
      "pc":"<PIN CODE>",
      "pht":"<Photo of user on aadhaar card in base64 format>",
      "state":"Maharashtra",
      "street":"",
      "uid":"<AADHAR NUMBER WITH FIRST 8 DIGITS MASKED>",
      "vtc":"<VILLAGE, TOWN, OR CITY>"
      },
"reference_id":"unique_ref_id5",
"status":"SUCCESS"
}
```

Digilocker Webhook Response Body (PAN Fetch)

None


```
{
"doc_type":"PANCR",
"download_url":"<URL to download PAN details in xml format>",
"file_format":"xml",
"h":"72597926110c73a72376a839e5ccd51bab57b287",
"parsed_details":{
      "dob":"<DOB IN YYYY-MM-DD FORMAT>",
      "gender":"MALE",
      "name":"<NAME ON PAN CARD>",
      "number":"<PAN NUMBER>",
      "verified_on":"12-07-2024 15:44:40"
      },
"reference_id":"unique_ref_id6",
"status":"SUCCESS"
}
```

Digilocker Response Parameters:

Key	Datatype	Description	Validation
h	string	Hash or unique identifier for the document.	a valid hash string.
doc_type	string	Type of the document	"PANCR": for pan, "ADHAR": for aadhaar
download_url	string (URL)	URL to download the document details in XML format.	URL
file_format	string	Format of the file to be downloaded.	"xml"
parsed_details	object	Contains the parsed details from the document.	Must be a valid object.
parsed_details.dob	string	Date of birth of the user in yyyy-mm-dd format	
parsed_details.gender	string	Gender of the user	
parsed_details.name	string	Name of the individual	
parsed_details.number	string	Document number (e.g., PAN number).	
parsed_details.verified_on	string	The date and time when the details were verified.	
reference_id	string	Unique reference identifier for the document.	
status	string	Status of the document verification.	
parsed_details.co	string	Care of (e.g., father's name) for Aadhaar card	
parsed_details.country	string	Country of the individual for Aadhaar card.	
parsed_details.dist	string	District of the individual for Aadhaar card.	
parsed_details.generated_at	string	The date and time when the Aadhaar details were generated.	
parsed_details.house	string	House address of the user on Aadhaar card.	
parsed_details.lang	string	Language preference on Aadhaar card holder	

parsed_details.lm	string	Landmark near the individual's house on Aadhaar card	
parsed_details.loc	string	Locality of the individual on Aadhaar card	
parsed_details.pc	string	Postal code of the individual on Aadhaar card.	
parsed_details.pht	string	Photo of the Aadhaar card holder in Base64 format.	
parsed_details.state	string	State of the individual for Aadhaar card.	
parsed_details.street	string	Street address of the individual for Aadhaar card.	
parsed_details.uid	string	Unique identifier for the Aadhaar card (masked).	
parsed_details.vtc	string	Village, Town, or City of the individual for Aadhaar card.	

Digilocker Webhook Errors

1. If user clicks on “Deny” button on consent screen

If the user clicks “Deny” button on the consent screen, below if the error response you should expect on webhook

```
None
{
    "doc_type": "ADHAR", //Similar for "PANCR"
    "file_format": "xml",
    "h": "7dbac263175c0e850929ef5ead4c0aaa46066d8d",
    "reference_id": "unique-ref-id-123456",
    "status": "USER_DENIED_ACCESS"
}
```

2. If user unchecks the Aadhaar checkbox and then clicks on “Allow” button on consent screen

If user unchecks the Aadhaar checkbox and then clicks on “Allow” button on consent screen, below is the error response you should expect on webhook

```
None
{
    "doc_type": "ADHAR", //Similar for "PANCR"
    "file_format": "xml",
    "h": "0ddec066ed2ba4076cf737112a9e8a5229262b45",
    "reference_id": "unique-ref-id-1231231233ccc",
    "status": "INSUFFICIENT_SCOPE"
}
```

3. Something went wrong at digilocker's end

```
None
{
    "doc_type": "ADHAR", //Similar for "PANCR"
    "file_format": "xml",
    "h": "960c86e04e5ecb38a54d4fd25490052bb60278cb",
    "reference_id": "abc_127",
    "status": "DIGILOCKER_ERROR"
}
```

4. If incorrect PAN number is provided for PAN fetch

```
None
{
    "doc_type": "PANCR",
    "file_format": "xml",
    "h": "1178a39af8ced032e337da88bc0ff93c2e44e9d7",
    "reference_id": "unique-ref-id-1231231233cccaa",
    "status": "DIGILOCKER_ERROR"
}
```

IDfy - EVE Error codes:

1. If session for given reference_id already exists

```
None
{
    "action": "verify_with_source",
    "completed_at": "2024-07-12T16:47:57+05:30",
    "created_at": "2024-07-12T16:47:57+05:30",
    "group_id": "8e16424a-58fc-4ba4-ab20-5bc8e7c3c41e",
    "request_id": "e22ed48b-3654-4c7d-965f-d02c0ca8bc04",
    "result": {
        "source_output": {
            "redirect_url": null,
            "reference_id": "unique_ref_id6",
            "session_exists": true,
            "status": "success"
        }
    },
    "status": "completed",
    "task_id": "74f4c926-250c-43ca-9c53-453e87ceacd1",
    "type": "ind_digilocker_fetch_documents"
}
```

2. If the source is down

```
None
{
    "action": "verify_with_source",
    "completed_at": "2024-07-12T16:49:18+05:30",
    "created_at": "2024-07-12T16:49:18+05:30",
    "group_id": "8e16424a-58fc-4ba4-ab20-5bc8e7c3c41e",
    "request_id": "9b6a8f2f-e831-4a54-928e-8fadd2dca44f",
    "result": {
```

```
        "source_output": {
            "redirect_url": null,
            "reference_id": null,
            "session_exists": null,
            "status": "source_down"
        }
    },
    "status": "failed",
    "task_id": "74f4c926-250c-43ca-9c53-453e87ceacd1",
    "type": "ind_digilocker_fetch_documents"
}
```


3. Other common error codes

HTTP Error Code	Error Code	Error Message	Remarks
422	source_down	source_down	Source is down
400	BAD_REQUEST	Malformed Request	When any mandatory parameters are missing or the input parameters do not follow the API spec this error is sent in response. request_id is generated
401		No API key found in request	When the API key is missing. No request_id is generated.
403		Invalid Authentication Credentials	When the API key is incorrect. No request_id is generated in this case
422	INSUFFICIENT_CREDITS	Insufficient credits	
429		Rate Limit Reached	When the configured rate limit or default (if not configured) is exceeded. No request_id is generated in this case. No request_id is generated.
500	INTERNAL_ERROR	Something went wrong	request_id is generated. You will receive this error when there is some issue at IDfy's end.

504	TIMEOUT	timeout	When any IDfy EVE sync API takes longer than 50 secs or IDfy EVE async API takes longer than 10mins to process any request, the request is timed out and this response is sent back.

Digilocker Verification process:

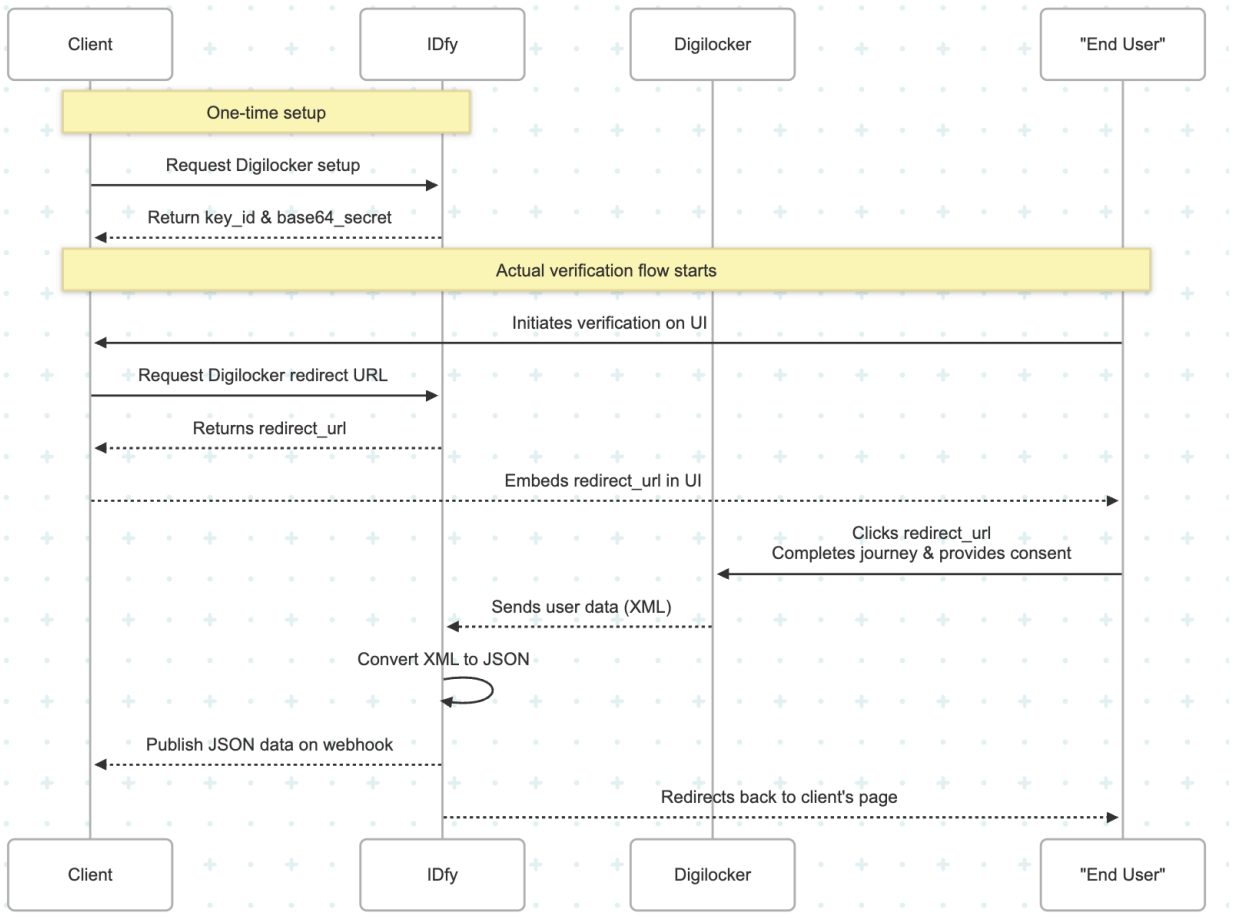

Digilocker Consent Flow - User Experience

This will be the flow after user clicks on the **`redirect_url`** obtained in IDfy's API response:

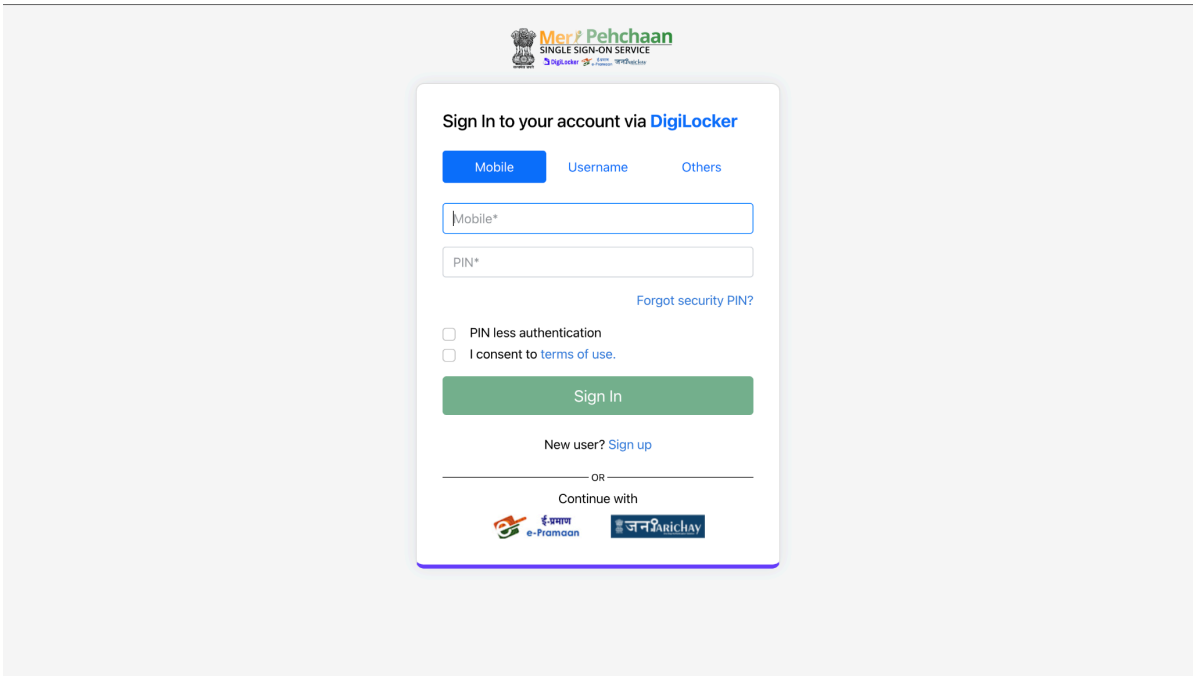

Step1: Customer will see options to initiate the verification process

Checking the "PIN Less authentication" will remove the PIN input box from the page

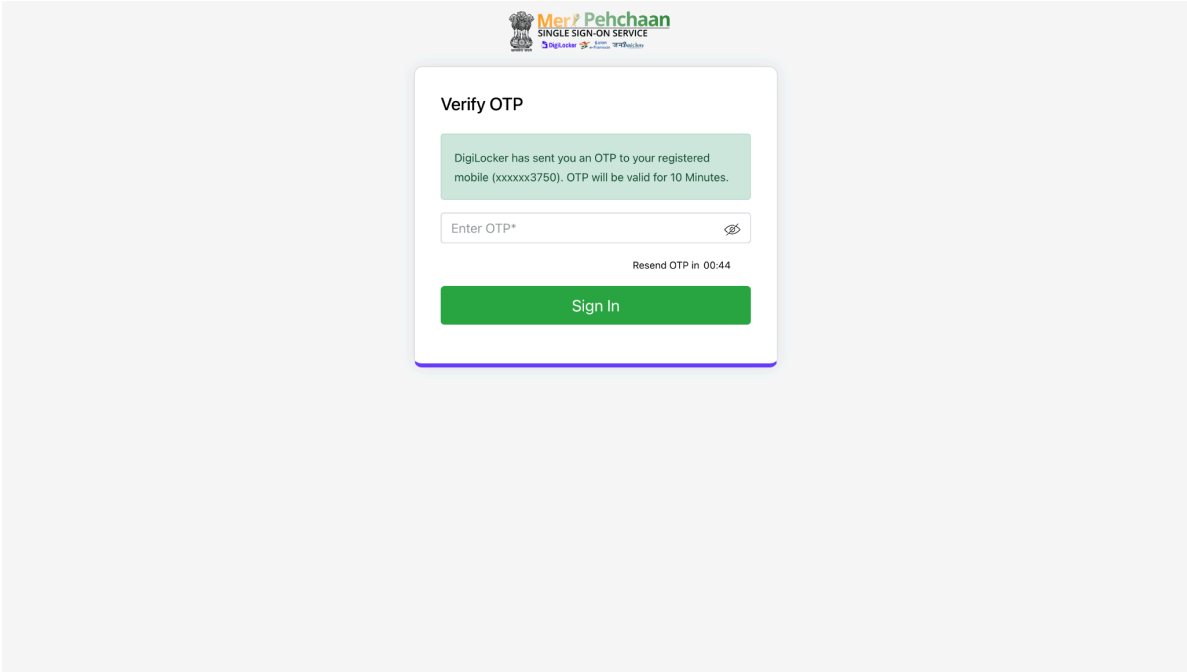

Step2: Customer will enter OTP received on the registered mobile number

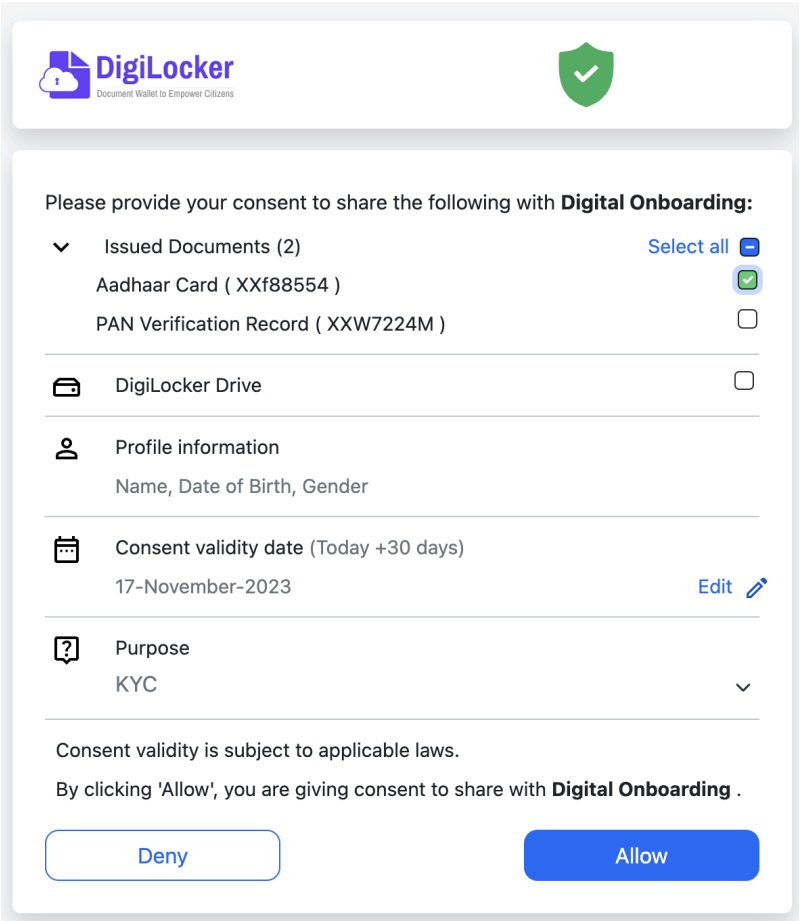

Step4: A new consent screen will appear in front of customer to grant access

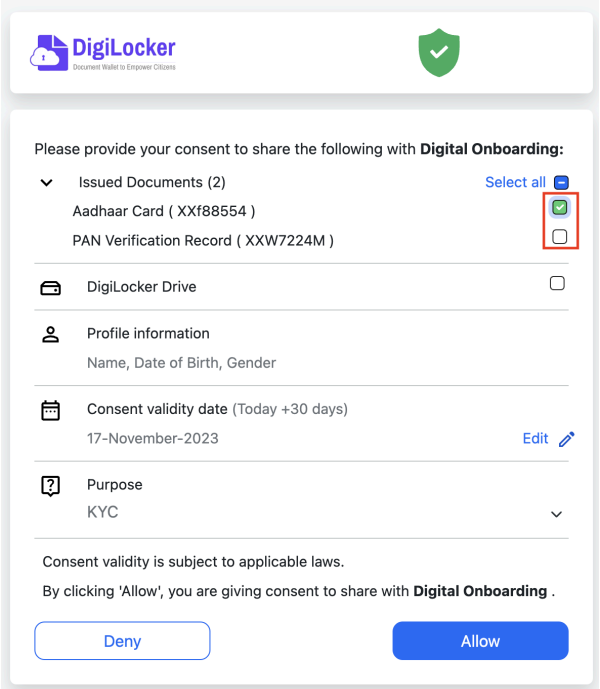

Step4.1: Customer will need to provide consent for Aadhaar card/Pan card, whichever is applicable

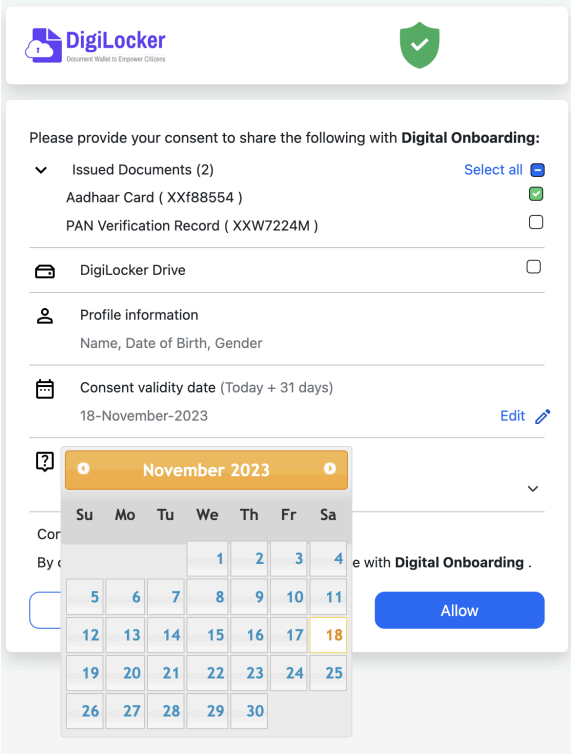

Step4.2: Customer will need to select the consent validity date. By default it will be today's date

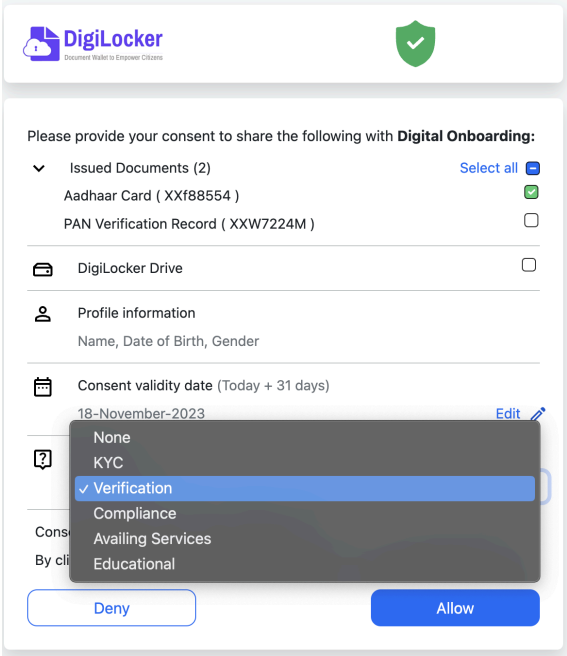

Step4.3: Customer will need to select the purpose from the dropdown

After updating the details, the customer clicks Allow to give consent. The response is then sent to the webhook specified in the request. If consent isn't provided, an error response is sent to the webhook. The user is then redirected to the redirect_url from the request.

Digilocker Integration steps:

This API supports mobile integration. If you need to integrate digilocker journey you will need to use another API.
For mobile integration, you can use the webview to open the journey in your mobile app.

1. Open the link in mobile app
2. Once the user submits the journey, you will get the webhook URL.
3. User gets redirected to the “redirect_url” that was sent in the API request body.
4. You force close the webview and take the user back to your app's screen.

Here is the webview implementation document - https://idfy-integration.notion.site/Webview-Implementation-b55e1be2c1c741eeb18b892406ce39b9.
You can use this or any other webview as well.

Note: If you are planning to integrate digilocker in a web application, then this API is not applicable as redirection is not supported by this API. For website integration we will provide you a different endpoint which supports redirection to the URL provided by customer post user submits the digilocker journey.

Webview Implementation Overview

1. **Flow**:
   - Client app → Webview opens → IDfy journey → Redirection to the client app.
2. **Resources for Implementing Webview**:
   - **Opening the Webview**: (links provided for resources like StackOverflow, test app, GitHub).
   - **Closing the Webview**: Different methods, triggers, and future possibilities are described.

Permissions and Features

Ensure the following permissions and features are implemented in the app:

```None
<uses-permission android:name="android.permission.INTERNET" />
<uses-permission android:name="android.permission.RECORD_AUDIO" />
<uses-permission android:name="android.permission.CAMERA" />
<uses-permission android:name="android.permission.MODIFY_AUDIO_SETTINGS" />
<uses-permission android:name="android.permission.ACCESS_FINE_LOCATION" />
<uses-permission android:name="android.permission.ACCESS_COARSE_LOCATION" />
<uses-permission android:name="android.permission.ACCESS_NETWORK_STATE" />
<uses-permission android:name="android.permission.WRITE_EXTERNAL_STORAGE" />
<uses-feature android:name="android.hardware.camera" />
<uses-feature android:name="android.hardware.camera.autofocus" />
```

```
<uses-feature android:name="android.hardware.MICROPHONE" />
<uses-feature android:name="android.webkit.resource.VIDEO_CAPTURE" />
<uses-feature android:name="android.webkit.resource.AUDIO_CAPTURE" />
```

Suggestions for Webview Journey

1. **Opening the Webview**:
    - Webview sends a permission request to the app.
    - The app must handle the callback and grant permission to the Webview.
    - **Resource:** [Handling Geolocation Permission Requests]
2. **Closing the Webview**:
- Use a **redirect URI** as a query parameter with the capture link.
- Example URL:

```
None
https://capture.kyc.idfy.com/captures?t=Buoq2Xf4zbZ&redirect_uri=https://idfy.com
```

3. **Implementation**:
    - Override the `onPageStarted` method of `WebViewClient`.
    - Check if the loaded URL matches the redirect URI and close the Webview (`finish()`).
    - Add activity results for success or failure callbacks.
4. **Resource**: Closing WebView on URL Detection.

General Instructions for Webview Implementation

1. Use the **Android Native WebView** (not hybrid frameworks like Cordova).
2. Set `minSdkVersion` to **17** in `build.gradle`.
3. Configure `WebSettings` for the WebView:

```
None
webSettings.setJavaScriptEnabled(true);
webSettings.setMediaPlaybackRequiresUserGesture(false);
webSettings.setJavaScriptCanOpenWindowsAutomatically(true);
webSettings.setPluginState(WebSettings.PluginState.ON);
webSettings.setDomStorageEnabled(true);
```

```
webSettings.setAllowFileAccess(true);
hardwareAccelerated = "true";
```

Additional Resources

1. **Source Code**:
    - Android Java Capture Demo
    - React Native Capture Demo
2. **Handling Back Button**:
    - Prevent app exit when back is pressed within the WebView.
    - **Resource**: Handling Back Button.