# Fetch Documents From Digilocker API

ind_digilocker_fetch_documents


**Fetch Documents From Digilocker API** **1**
Digilocker Documents Fetch API: 2
Description 2
IDfy Request Headers [POST]: 2
IDfy Request URL [POST]: 2
Request parameters: 2
IDfy Request Body [POST] (Aadhaar Fetch): 4
IDfy Request Body [POST] (PAN Fetch) 4
IDfy Request Body [POST] (Multi-Document Fetch) 5
IDfy - EVE Response Body 6
IDfy - EVE Response Parameters 7
Digilocker Webhook Response Body (Aadhaar Fetch) 8
Digilocker Webhook Response Body (PAN Fetch) 9
Digilocker Webhook Response Body (Multi-Doc Fetch) 9
Digilocker Response Parameters: 11
Digilocker Webhook Errors 13
1. If user clicks on “Deny” button on consent screen 13
2. If user clicks on “Return to Digital Onboarding” button 13
3. If user unchecks the Aadhaar checkbox and then clicks on “Allow” button on consent screen 14
4. Something went wrong at digilocker’s end 14
5. If incorrect PAN number is provided for PAN fetch 14
IDfy - EVE Error codes: 15
1. If session for given reference_id already exists 15
2. If the source is down 15
3. Other common error codes 16
Digilocker Verification process: 17
Digilocker Consent Flow - User Experience 18
Digilocker Integration steps: 21
Webview Implementation Overview 21
Permissions and Features 22
Suggestions for Webview Journey 22
General Instructions for Webview Implementation 23
Additional Resources 23

# Digilocker Documents Fetch API:

## Description

This API is used to fetch documents from digilocker, based on end user's consent. The document retrieved will be in xml file format. It can extract user's aadhaar, pan, or both documents.

## IDfy Request Headers [POST]:

```
None
'account-id: {{account_id}}'
'api-key: {{api_key}}'
'Content-Type: application/json'
```

## IDfy Request URL [POST]:

```
None
https://eve.idfy.com/v3/tasks/sync/verify_with_source/ind_digilocker_fetch_documents
```

### Request parameters:

| Key | Datatype | Mandatory | Description | Validation |
|---|---|---|---|---|
| task_id | String | Yes | Unique identifier for the task | Must be a valid UUID |
| group_id | String | Yes | Identifier for the group | Must be a valid UUID |
| data | Object | Yes | Container for the data | Must be a valid JSON object |
| data.reference_id | String | Yes | Unique_reference_id(ideally unique for each session) | Must be a unique string |
| data.key_id | String | Yes | key_id shared by IDfy | |
| data.ou_id | String | Yes | ou_id shared by IDfy | |
| data.secret | String | Yes | Secret key shared by IDfy | Must be a base64 encoded string |

| | | | | |
|---|---|---|---|---|
| data.callback_url | String | Yes | Webhook callback URL for receiving callback response from digilocker | Must be a valid webhook URL. The digilocker response will be received on this webhook |
| data.doc_type | String/Array | Yes | Document type needed to be fetched from digilocker | String format:<br>“ADHAR”: for aadhaar card<br>“PANCR”: for pan card<br>[“ADHAR”,“PANCR”]: for both |
| data.file_format | String | Yes | “xml” | The response from digilocker will be received in XML file format |
| data.extra_fields | Object | Yes | Extra fields required for digilocker authentication | Empty in case of aadhaar, and respective search parameters in case of any other document.<br><br>In case of “PANCR”:<br>extra_fields={"panno":"PAN-NUMBER", "PANFullName": "FULL NAME ON PAN CARD"<br>} |

“key_id”, “ou_id”, and “secret” must be of the same combination as shared by IDfy.

IDfy Request Body [POST] (Aadhaar Fetch):

```
None
{
   "task_id": "74f4c926-250c-43ca-9c53-453e87ceacd1",
   "group_id": "8e16424a-58fc-4ba4-ab20-5bc8e7c3c41e",
   "data":
       {
       "reference_id": "unique_ref_id",//must be unique
       "key_id": "<key-id>",
       "ou_id": "<ou-id>",
       "secret": "<base64-encoded-string>",
       "callback_url":
"https://webhook.site/1b6d6dd1-fc16-446f-8cf9-e9ad8c2b9866",
       "doc_type": "ADHAR",
       "file_format": "xml",
      "redirect_url": "URL where you want the user to get
      redirected after completion of digilocker journey",
       "extra_fields": {}
       }
}
```

IDfy Request Body [POST] (PAN Fetch)

```
None
{
   "task_id": "74f4c926-250c-43ca-9c53-453e87ceacd1",
   "group_id": "8e16424a-58fc-4ba4-ab20-5bc8e7c3c41e",
   "data":
       {
       "reference_id": "unique_ref_id",//must be unique
       "key_id": "<key-id>",
       "ou_id": "<ou-id>",
       "secret": "<base64-encoded-string>",
       "callback_url":
"https://webhook.site/1b6d6dd1-fc16-446f-8cf9-e9ad8c2b9866",
       "doc_type": "PANCR",
       "file_format": "xml",
```

```
        "extra_fields": {"panno":"PAN-NUMBER", "PANFullName":
"FULL NAME ON PAN CARD"},
"redirect_url": "URL where you want the user to get redirected
after completion of digilocker journey",
        }
}
```

IDfy Request Body [POST] (Multi-Document Fetch)

None

```
{
   "task_id": "74f4c926-250c-43ca-9c53-453e87ceacd1",
   "group_id": "8e16424a-58fc-4ba4-ab20-5bc8e7c3c41e",
   "data":
       {
       "reference_id": "unique_ref_id2",
       "key_id": "<key-id>",
       "ou_id": "<ou-id>",
       "secret": "<base64-encoded-string>",
       "callback_url":
"https://webhook.site/1b6d6dd1-fc16-446f-8cf9-e9ad8c2b9866",
       "doc_type": ["ADHAR","PANCR"],
       "file_format": "xml",
       "extra_fields": {"panno":"PAN-NUMBER", "PANFullName":
"NAME ON PAN CARD"},
"redirect_url": "URL where you want the user to get redirected
after completion of digilocker journey",
       }
}
```

## IDfy - EVE Response Body

None


```
{
    "action": "verify_with_source",
    "completed_at": "2024-07-12T10:51:19+05:30",
    "created_at": "2024-07-12T10:51:19+05:30",
    "group_id": "8e16424a-58fc-4ba4-ab20-5bc8e7c3c41e",
    "request_id": "ae5adf8f-c851-43b3-bf8a-d6990d9e7789",
    "result": {
        "source_output": {
            "redirect_url": "<digilocker redirect url>",
            "reference_id": "unique_ref_id2",
            "session_exists": false,
            "status": "success"
        }
    },
    "status": "completed",
    "task_id": "74f4c926-250c-43ca-9c53-453e87ceacd1",
    "type": "ind_digilocker_fetch_documents"
}
```

## IDfy - EVE Response Parameters

| Key | Datatype | Description | Validation |
|---|---|---|---|
| action | String | Action taken for the request | A valid string. Value: “verify_with_source” |
| completed_at | String | Timestamp when the action was completed | A valid datetime in ISO 8601 format |
| created_at | String | Timestamp when the request was created | A valid datetime in ISO 8601 format |
| group_id | String | Identifier for the group | A valid UUID |
| request_id | String | Identifier for the request | A valid UUID |
| result | Object | Container for the result | A valid JSON object |
| result.source_output | object | Contains the output details from the source. | Must be a valid JSON object |
| result.source_output.redirect_url | string | URL to redirect for document fetching. | Must be a valid URL |
| result.source_output.reference_id | string | Unique reference identifier for the session. | Must be a valid string. |
| result.source_output.session_exists | Bool | Indicates if the session already exists. | Must be true or false. |
| result.source_output.status | string | Status of the source output. | |
| status | String | Status of the response | A valid string |
| task_id | String | The unique identifier of a requested task provided by you | a valid UUID |
| type | String | Type of request | Value: “ind_digilocker_fetch_documents” |

## Digilocker Webhook Response Body (Aadhaar Fetch)

None


```
{
"aadhaar_xml_fetched_at":"2025-10-29T15:10:25.524+05:30"
"doc_type":"ADHAR",
"download_url":"<URL to download aadhaar details in xml format>",
"file_format":"xml",
"h":"36a9e33dc8e18f3283ace0e48e3ad38547b86af7",
"parsed_details":{
     "co":"<CARE OF (eg. FATHER'S NAME)>",
     "country":"India",]
     "dist":"<DISTRICT>",
     "dob":"<DOB IN YYYY-MM-DD FORMAT>",
     "gender":"M",
     "generated_at":"2024-07-12T15:47:18.050+05:30",
     "house":"",
     "lang":"",
     "lm":"<LANDMARK>",
     "loc":"<LOCALITY>",
     "name":"<NAME ON AADHAAR CARD>",
     "pc":"<PIN CODE>",
     "pht":"<Photo of user on aadhaar card in base64 format>",
     "state":"Maharashtra",
     "street":"",
     "uid":"<AADHAR NUMBER WITH FIRST 8 DIGITS MASKED>",
     "vtc":"<VILLAGE, TOWN, OR CITY>",
     "yob": "2024"
     },
"reference_id":"unique_ref_id5",
"status":"SUCCESS"
}
```

## Digilocker Webhook Response Body (PAN Fetch)

```
None
{
"doc_type":"PANCR",
"download_url":"<URL to download PAN details in xml format>",
"file_format":"xml",
"h":"72597926110c73a72376a839e5ccd51bab57b287",
"parsed_details":{
      "dob":"<DOB IN YYYY-MM-DD FORMAT>",
      "gender":"MALE",
      "name":"<NAME ON PAN CARD>",
      "number":"<PAN NUMBER>",
      "verified_on":"12-07-2024 15:44:40"
      },
"reference_id":"unique_ref_id6",
"status":"SUCCESS"
}
```

## Digilocker Webhook Response Body (Multi-Doc Fetch)

```
None
[
{
"h":"1e924e9720de0b29bef89d14c79e2832403cdc4f",
"doc_type":"PANCR",
"download_url":"<URL to download PAN details in xml format>",
"file_format":"xml",
"parsed_details":{
      "dob":"<DOB IN YYYY-MM-DD FORMAT>",
      "gender":"MALE",
      "name":"<NAME ON PAN CARD>",
      "number":"<PAN NUMBER>",
      "verified_on":"12-07-2024 15:44:40"
```

```
      },
"reference_id":"unique_ref_id4",
"status":"SUCCESS"
},
{
"h":"1e924e9720de0b29bef89d14c79e2832403cdc4f",
"doc_type":"ADHAR",
"download_url":"<URL to download aadhaar details in xml format>",
"file_format":"xml",
"parsed_details":{
      "co":"<CARE OF (eg. FATHER'S NAME)>",
      "country":"India",
      "dist":"<DISTRICT>",
      "dob":"<DOB IN YYYY-MM-DD FORMAT>",
      "gender":"M",
      "generated_at":"2024-07-12T15:47:18.050+05:30",
      "house":"",
      "lang":"",
      "lm":"<LANDMARK>",
      "loc":"<LOCALITY>",
      "name":"<NAME ON AADHAAR CARD>",
      "pc":"<PIN CODE>",
      "pht":"<Photo of user on aadhaar card in base64 format>",
      "state":"Maharashtra",
      "street":"",
      "uid":"<AADHAR NUMBER WITH FIRST 8 DIGITS MASKED>",
      "vtc":"<VILLAGE, TOWN, OR CITY>"
      },
"reference_id":"unique_ref_id4",
"status":"SUCCESS"
}
]
```

## Digilocker Response Parameters:

| Key | Datatype | Description | Validation |
|---|---|---|---|
| h | string | Hash or unique identifier for the document. | a valid hash string. |
| doc_type | string | Type of the document | "PANCR": for pan,<br>"ADHAR": for aadhaar |
| download_url | string (URL) | URL to download the document details in XML format. | URL |
| file_format | string | Format of the file to be downloaded. | "xml" |
| parsed_details | object | Contains the parsed details from the document. | Must be a valid object. |
| parsed_details.dob | string | Date of birth of the user in yyyy-mm-dd format | |
| parsed_details.gender | string | Gender of the user | |
| parsed_details.name | string | Name of the individual | |
| parsed_details.number | string | Document number (e.g., PAN number). | |
| parsed_details.verified_on | string | The date and time when the details were verified. | |
| reference_id | string | Unique reference identifier for the document. | |
| status | string | Status of the document verification. | |
| parsed_details.co | string | Care of (e.g., father's name) for Aadhaar card | |
| parsed_details.country | string | Country of the individual for Aadhaar card. | |
| parsed_details.dist | string | District of the individual for Aadhaar card. | |
| parsed_details.generated_at | string | The date and time when the Aadhaar details were generated. | |
| parsed_details.house | string | House address of the user on Aadhaar card. | |
| parsed_details.lang | string | Language preference on Aadhaar card holder | |

| | | | |
|---|---|---|---|
| parsed_details.lm | string | Landmark near the individual's house on Aadhaar card | |
| parsed_details.loc | string | Locality of the individual on Aadhaar card | |
| parsed_details.pc | string | Postal code of the individual on Aadhaar card. | |
| parsed_details.pht | string | Photo of the Aadhaar card holder in Base64 format. | |
| parsed_details.state | string | State of the individual for Aadhaar card. | |
| parsed_details.street | string | Street address of the individual for Aadhaar card. | |
| parsed_details.uid | string | Unique identifier for the Aadhaar card (masked). | |
| parsed_details.vtc | string | Village, Town, or City of the individual for Aadhaar card. | |

# Digilocker Webhook Errors

## 1. If user clicks on “Deny” button on consent screen

If the user clicks “Deny” button on the consent screen, below if the error response you should expect on webhook

```
None
{
    "doc_type": "ADHAR", //Similar for "PANCR"
    "file_format": "xml",
    "h": "7dbac263175c0e850929ef5ead4c0aaa46066d8d",
    "reference_id": "unique-ref-id-123456",
    "status": "USER_DENIED_ACCESS"
}
```

## 2. If user clicks on “Return to Digital Onboarding” button

The redirect_url still remains active in this case, and the same can be used to initiate the journey again.

```
None
{
    "doc_type": "ADHAR", //Similar for "PANCR"
    "file_format": "xml",
    "h": "7dbac263175c0e850929ef5ead4c0aaa46066d8d",
    "reference_id": "unique-ref-id-123456",
    "status": "USER_DENIED_ACCESS"
}
```

3. If user unchecks the Aadhaar checkbox and then clicks on “Allow” button on consent screen

   If user unchecks the Aadhaar checkbox and then clicks on “Allow” button on consent screen, below is the error response you should expect on webhook

```
None
{
    "doc_type": "ADHAR", //Similar for "PANCR"
    "file_format": "xml",
    "h": "0ddec066ed2ba4076cf737112a9e8a5229262b45",
    "reference_id": "unique-ref-id-1231231233ccc",
    "status": "INSUFFICIENT_SCOPE"
}
```

4. Something went wrong at digilocker’s end

```
None
{
    "doc_type": "ADHAR", //Similar for "PANCR"
    "file_format": "xml",
    "h": "960c86e04e5ecb38a54d4fd25490052bb60278cb",
    "reference_id": "abc_127",
    "status": "DIGILOCKER_ERROR"
}
```

5. If incorrect PAN number is provided for PAN fetch

```
None
{
    "doc_type": "PANCR",
    "file_format": "xml",
    "h": "1178a39af8ced032e337da88bc0ff93c2e44e9d7",
    "reference_id": "unique-ref-id-1231231233cccaa",
    "status": "DIGILOCKER_ERROR"
}
```

## IDfy - EVE Error codes:

1. If session for given reference_id already exists

```
None
{
    "action": "verify_with_source",
    "completed_at": "2024-07-12T16:47:57+05:30",
    "created_at": "2024-07-12T16:47:57+05:30",
    "group_id": "8e16424a-58fc-4ba4-ab20-5bc8e7c3c41e",
    "request_id": "e22ed48b-3654-4c7d-965f-d02c0ca8bc04",
    "result": {
        "source_output": {
            "redirect_url": null,
            "reference_id": "unique_ref_id6",
            "session_exists": true,
            "status": "success"
        }
    },
    "status": "completed",
    "task_id": "74f4c926-250c-43ca-9c53-453e87ceacd1",
    "type": "ind_digilocker_fetch_documents"
}
```

2. If the source is down

```
None
{
    "action": "verify_with_source",
    "completed_at": "2024-07-12T16:49:18+05:30",
    "created_at": "2024-07-12T16:49:18+05:30",
    "group_id": "8e16424a-58fc-4ba4-ab20-5bc8e7c3c41e",
    "request_id": "9b6a8f2f-e831-4a54-928e-8fadd2dca44f",
    "result": {
```

```
        "source_output": {
            "redirect_url": null,
            "reference_id": null,
            "session_exists": null,
            "status": "source_down"
        }
    },
    "status": "failed",
    "task_id": "74f4c926-250c-43ca-9c53-453e87ceacd1",
    "type": "ind_digilocker_fetch_documents"
}
```


3. Other common error codes

| HTTP Error Code | Error Code | Error Message | Remarks |
|---|---|---|---|
| 422 | source_down | source_down | Source is down |
| 400 | BAD_REQUEST | Malformed Request | When any mandatory parameters are missing or the input parameters do not follow the API spec this error is sent in response. request_id is generated |
| 401 | | No API key found in request | When the API key is missing. No request_id is generated. |
| 403 | | Invalid Authentication Credentials | When the API key is incorrect. No request_id is generated in this case |
| 422 | INSUFFICIENT_CREDITS | Insufficient credits | |
| 429 | | Rate Limit Reached | When the configured rate limit or default (if not configured) is exceeded. No request_id is generated in this case. No request_id is generated. |
| 500 | INTERNAL_ERROR | Something went wrong | request_id is generated. You will receive this error when there is some issue at IDfy's end. |

| | | | |
|---|---|---|---|
| 504 | TIMEOUT | timeout | When any IDfy EVE sync API takes longer than 50 secs or IDfy EVE async API takes longer than 10mins to process any request, the request is timed out and this response is sent back. |

# Digilocker Verification process:



# Digilocker Consent Flow - User Experience

This will be the flow after user clicks on the **`redirect_url`** obtained in IDfy's API response:




*Step1: Customer will add an aadhaar number along with captcha and click on the next button*

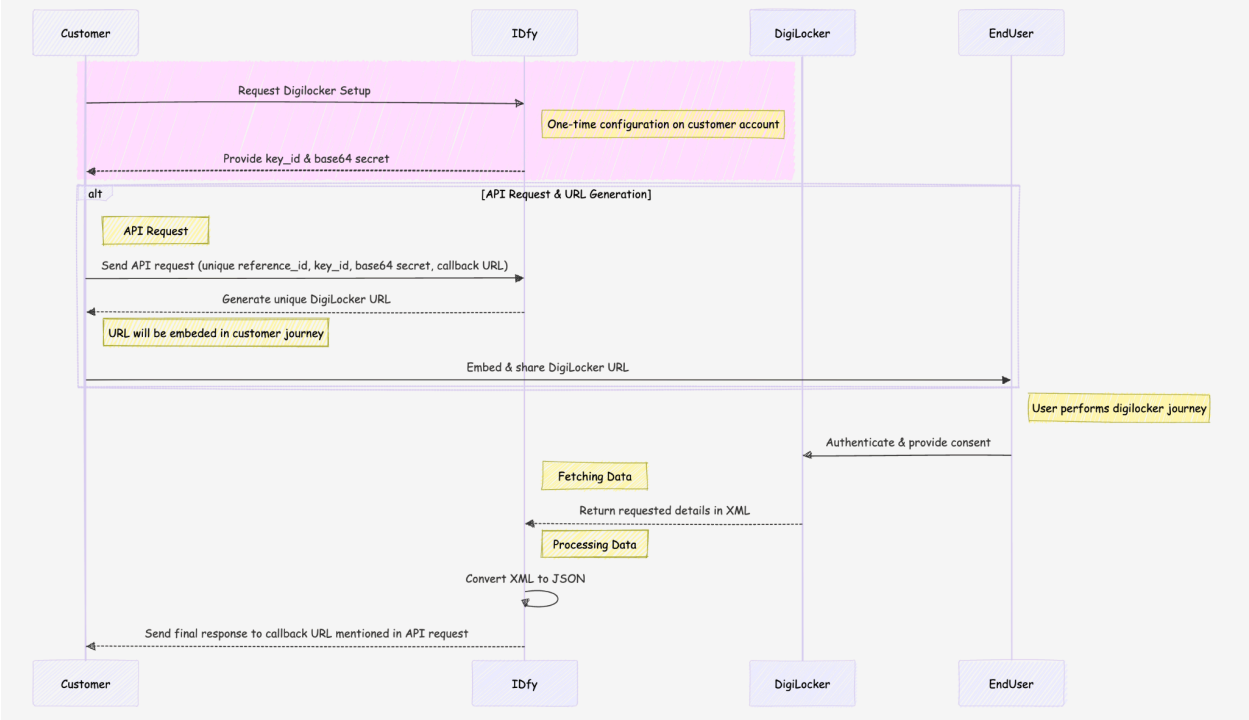


*Step2: Customer will enter OTP received on the registered mobile number*

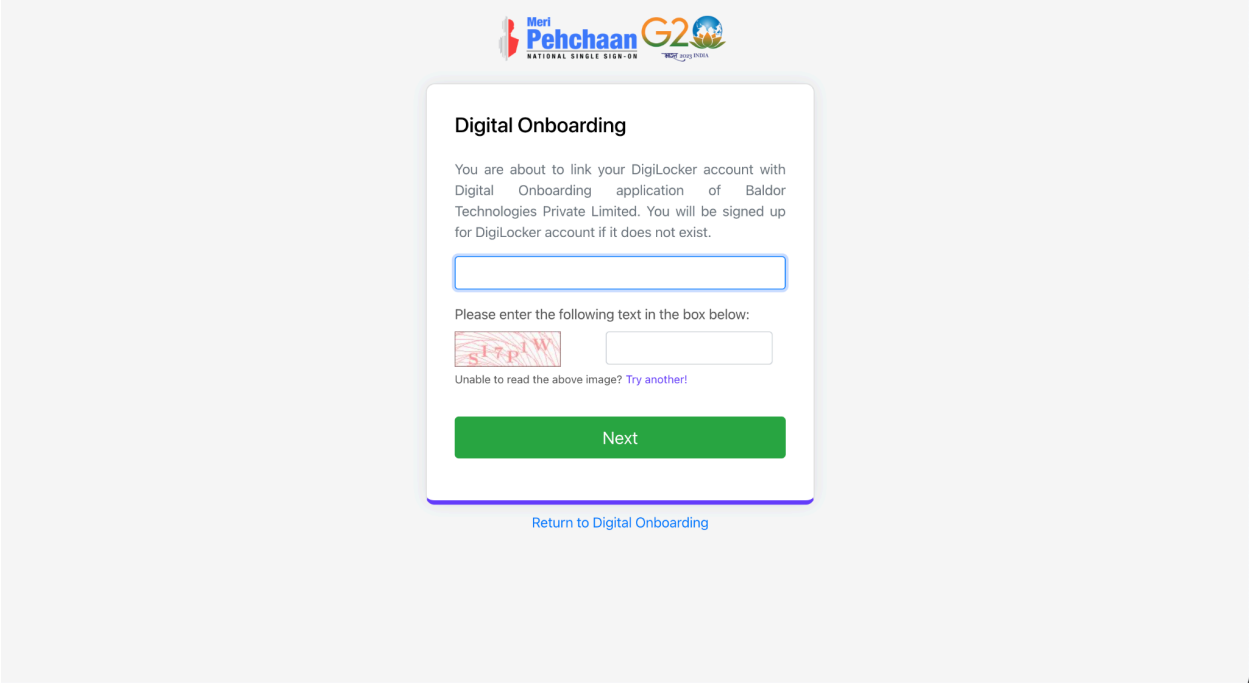


*Step3: Customer will enter 6 digits pin and click on continue button*

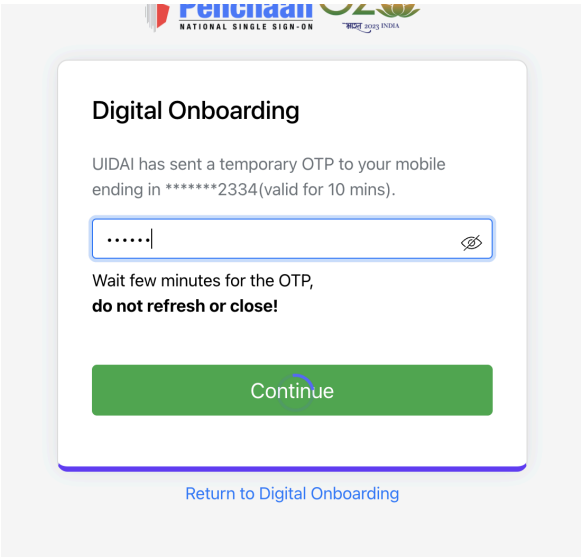


*Step4:* A new consent screen will appear in front of customer to grant access

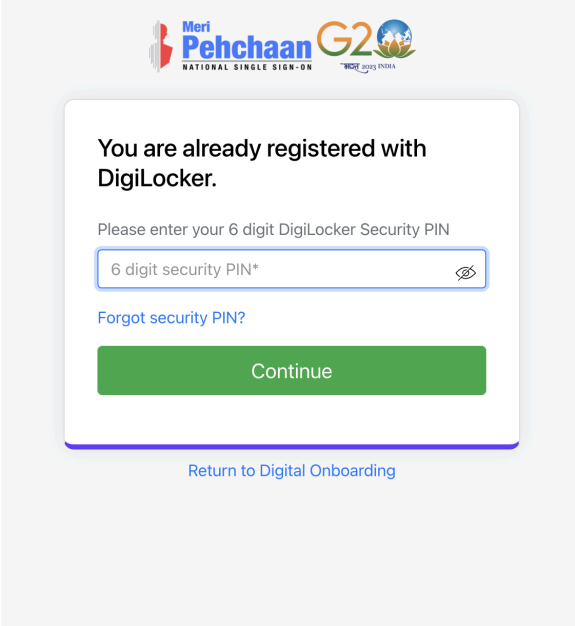


*Step4.1: Customer will need to provide consent for Aadhaar card/Pan card, whichever is applicable*

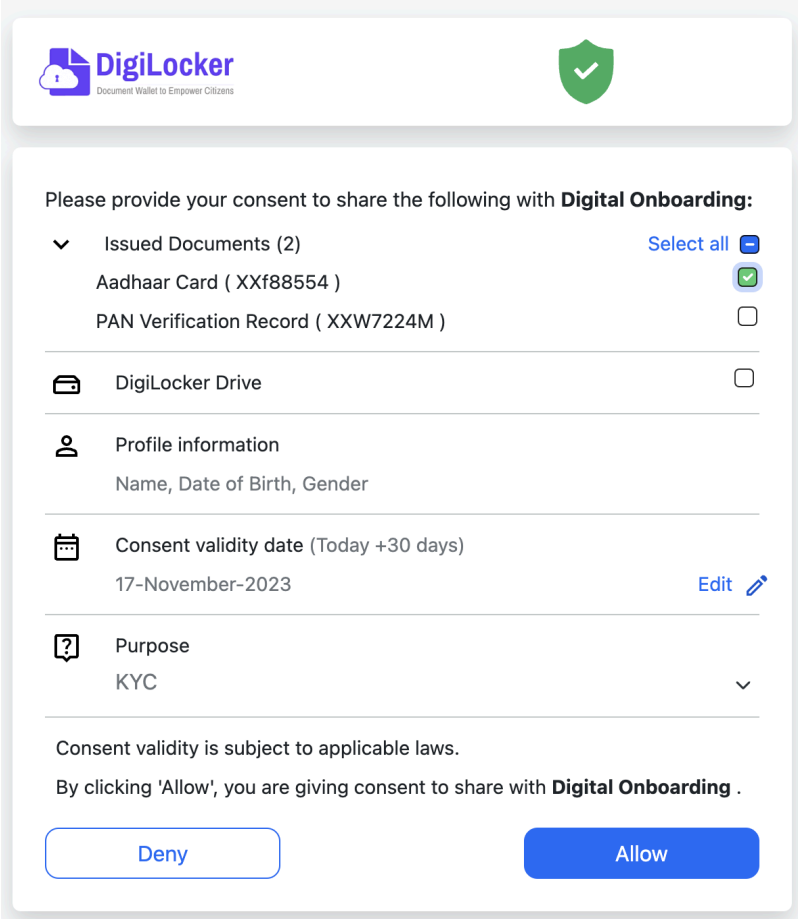


*Step4.2: Customer will need to select the consent validity date. By default it will be today's date*

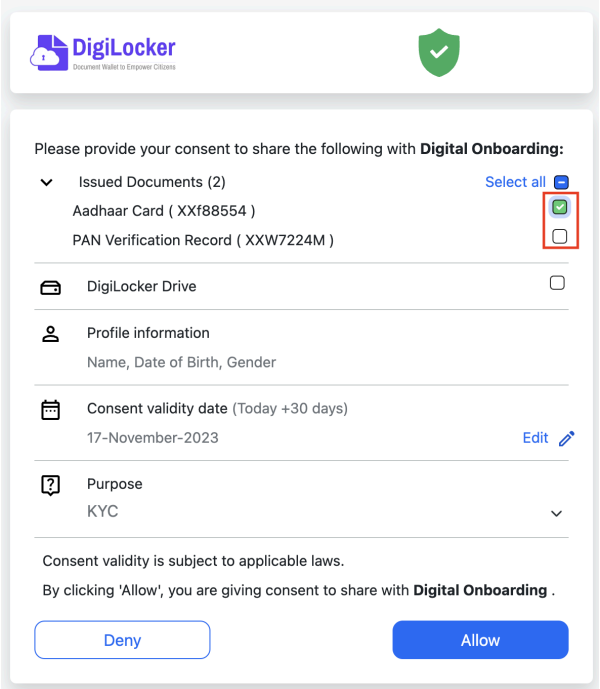


*Step4.3: Customer will need to select the purpose from the dropdown*

After updating the above details, the customer will click on Allow to provide the consent. Once the customer allows it, the response will be sent to the webhook mentioned in the request body. If the customer does not select the required consent, you will expect below responses on the webhook url.
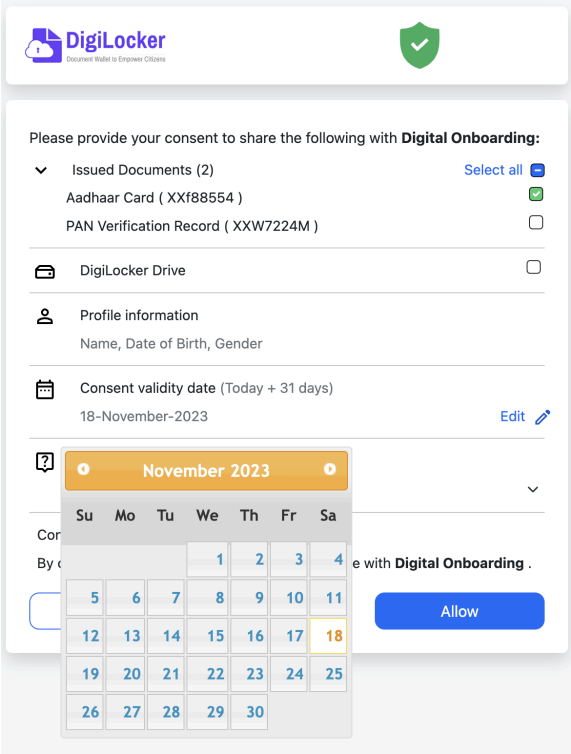
# Digilocker Integration steps:

This API supports both mobile as well as web integration.
In case of web integration, you can pass a redirect_url in the request body and once the journey is completed, the user will be redirected to the url mentioned in the request body.
For mobile integration, you can use the webview to open the journey in your mobile app.

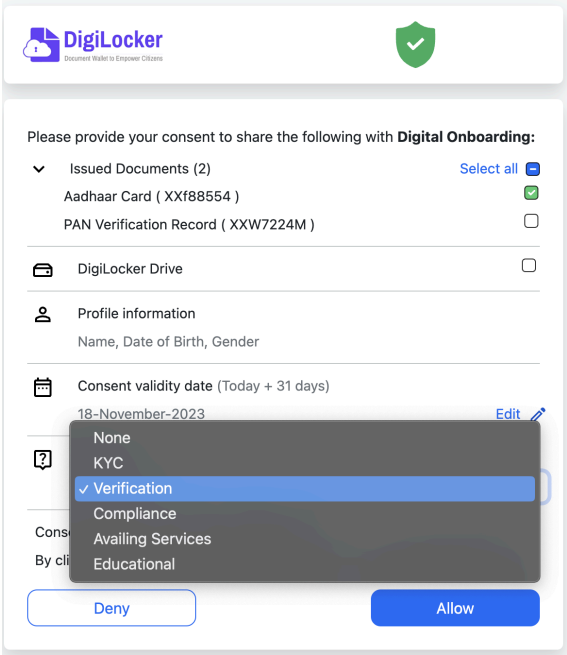1. Open the link in mobile app
2. Once the user submits the journey, you will get the webhook URL.
3. You force close the webview and take the user back to your app's screen.

Here is the webview implementation document - https://idfy-integration.notion.site/Webview-Implementation-b55e1be2c1c741eeb18b892406ce39b9.
You can use this or any other webview as well.

## Webview Implementation Overview

1. **Flow**:
    - Client app → Webview opens → IDfy journey → Redirection to the client app.
2. **Resources for Implementing Webview**:

- **Opening the Webview**: (links provided for resources like StackOverflow, test app, GitHub).
- **Closing the Webview**: Different methods, triggers, and future possibilities are described.

---

## Permissions and Features

Ensure the following permissions and features are implemented in the app:

```
None
<uses-permission android:name="android.permission.INTERNET" />
<uses-permission android:name="android.permission.RECORD_AUDIO" />
<uses-permission android:name="android.permission.CAMERA" />
<uses-permission android:name="android.permission.MODIFY_AUDIO_SETTINGS" />
<uses-permission android:name="android.permission.ACCESS_FINE_LOCATION" />
<uses-permission android:name="android.permission.ACCESS_COARSE_LOCATION" />
<uses-permission android:name="android.permission.ACCESS_NETWORK_STATE" />
<uses-permission android:name="android.permission.WRITE_EXTERNAL_STORAGE" />
<uses-feature android:name="android.hardware.camera" />
<uses-feature android:name="android.hardware.camera.autofocus" />
<uses-feature android:name="android.hardware.MICROPHONE" />
<uses-feature android:name="android.webkit.resource.VIDEO_CAPTURE" />
<uses-feature android:name="android.webkit.resource.AUDIO_CAPTURE" />
```

## Suggestions for Webview Journey

1. **Opening the Webview**:
    - Webview sends a permission request to the app.
    - The app must handle the callback and grant permission to the Webview.
    - **Resource:** [Handling Geolocation Permission Requests]
2. **Closing the Webview**:

- Use a **redirect URI** as a query parameter with the capture link.
- Example URL:

```
None
https://capture.kyc.idfy.com/captures?t=Buoq2Xf4zbZ&redirect_uri=https://
idfy.com
```

3. **Implementation**:

- Override the `onPageStarted` method of `WebViewClient`.
- Check if the loaded URL matches the redirect URI and close the Webview (`finish()`).
- Add activity results for success or failure callbacks.

4. **Resource**: [Closing WebView on URL Detection](#).

## General Instructions for Webview Implementation

1. Use the **Android Native WebView** (not hybrid frameworks like Cordova).
2. Set `minSdkVersion` to **17** in `build.gradle`.
3. Configure `WebSettings` for the WebView:

```
None
webSettings.setJavaScriptEnabled(true);
webSettings.setMediaPlaybackRequiresUserGesture(false);
webSettings.setJavaScriptCanOpenWindowsAutomatically(true);
webSettings.setPluginState(WebSettings.PluginState.ON);
webSettings.setDomStorageEnabled(true);
webSettings.setAllowFileAccess(true);
hardwareAccelerated = "true";
```

## Additional Resources

1. **Source Code**:
   - Android Java Capture Demo
   - React Native Capture Demo
2. **Handling Back Button**:
   - Prevent app exit when back is pressed within the WebView.
   - **Resource**: Handling Back Button.