Where the work runs

Three ways to run a calculation, chosen by the route at step 2.

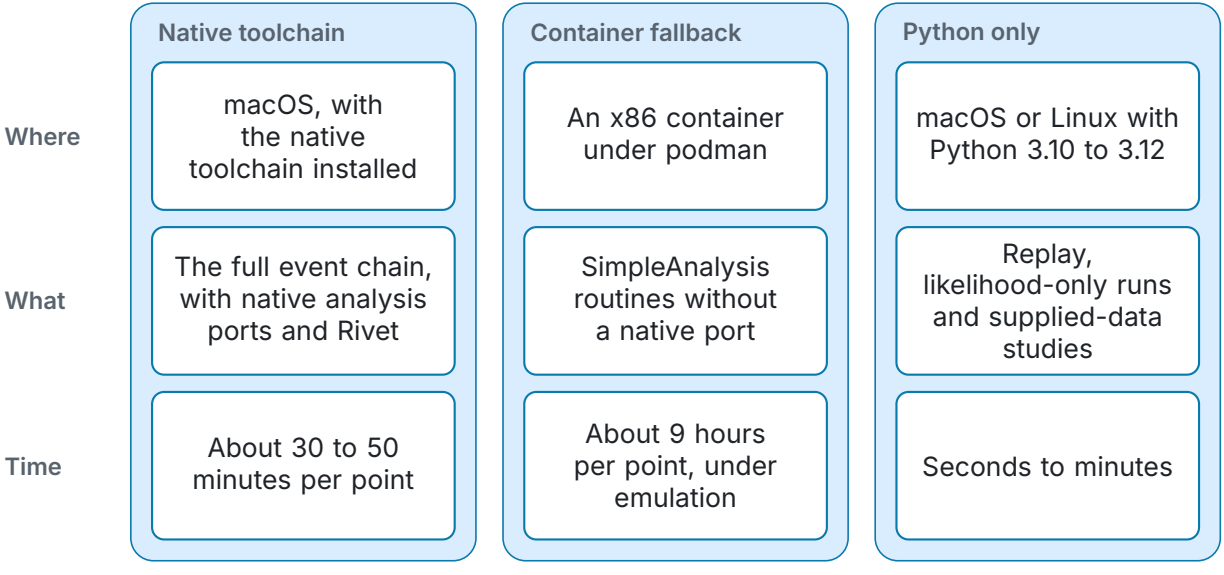

The native toolchain is the default. The container runs one point at a time. Long stages run under supervision; a resumed stage reuses its output only when its recorded inputs, code and runtime match.