Software Requirements Specification (SRS)

Event Management System — IEEE 830 / ISO 29148 structure

Project: Event Management System (EMS) — SE Mini Project
Version: 3.0
Authors: Shravani Mallur (PES1UG24CS621) · Arjun Bhat (PES1UG24CS655) · Amogh Herle (PES1UG24CS653)
Date: 13 November 2026
Status: Final (Sprint 2 frozen) — updated 13 Nov 2026

Revision history

Version	Date	Author	Change summary	Approval
1.0	21 Oct 2026	Team	First issue (Sprint 1)	
2.0	04 Nov 2026	Team	Sprint 2 update	
3.0	13 Nov 2026	Team	Restructured to the course SRS template; 20 FRs, 7 NFRs, security objectives/requirements, use case diagrams and RTM added	

Approvals

Role	Name	Signature / Email	Date
Course Coordinator			
Repository Owner	Amogh Herle		
Team members	Shravani Mallur, Arjun Bhat		

Table of Contents

1. Introduction
2. Overall description
3. External interface requirements
4. System features (detailed)
5. Non-functional requirements (detailed) — 5.1 Security
6. Quality attributes & acceptance tests
7. System models and diagrams (UML use cases)
8. Requirements Traceability Matrix (RTM)

1. Introduction

1.1 Purpose

This document is the Software Requirements Specification (SRS) for the Event Management System (EMS). It defines the functional and non-functional requirements, external interfaces, security objectives and requirements, and the acceptance and verification criteria for the system. It is the baseline against which the SAD (Documents/SAD_DOCUMENT.pdf) and the Test Plan (Documents/TEST-PLAN_DOCUMENT.pdf) are traced.

1.2 Scope

EMS is a web application through which Participants discover and register for campus events, Organizers create and manage events and their registrations, and Admins manage user accounts, event categories and platform statistics. It covers account lifecycle, role-based access, event management, registration with capacity control and waitlisting, notifications, reporting and export. It excludes payments/ticketing, native mobile apps and integration with external calendars.

1.3 Audience

Developers, QA engineers, security reviewers, the course instructor/evaluators, and the project team members listed above.

1.4 Definitions, acronyms and abbreviations

Term	Meaning
EMS	Event Management System
FR / NFR	Functional / Non-Functional Requirement
RBAC	Role-Based Access Control
IDOR	Insecure Direct Object Reference
CSRF / XSS / SQLi	Cross-Site Request Forgery / Cross-Site Scripting / SQL injection
TLS	Transport Layer Security
WCAG	Web Content Accessibility Guidelines
RPO / RTO	Recovery Point / Recovery Time Objective
RTM	Requirements Traceability Matrix
SRSec	Security Requirements Specification (Documents/SECURITY_DOCUMENT.pdf)

2. Overall description

2.1 Product perspective

EMS is a self-contained web application (Next.js App Router, TypeScript) backed by a PostgreSQL database and an SMTP service for transactional email. It has no dependency on other campus systems. Users access it through a standard web browser on desktop or mobile.

2.2 Major product functions

- Account creation with email verification, login, password reset (FR-001a – FR-002b)
- Role-based access, profile update, admin account management (FR-003a – FR-003c)
- Create, edit, cancel/delete events; notify participants (FR-004a – FR-005b)

- Browse, search, filter events; admin-managed categories (FR-006a – FR-006c)
- Register, capacity check, waitlist with auto-promotion, self-cancellation, reminders (FR-007 – FR-009b)
- Registration counts, CSV/PDF export, platform statistics (FR-010a – FR-010b)

2.3 User roles and characteristics

- **Participant:** general campus user; expects to find and register for an event in minutes without training.
- **Organizer:** staff or student who publishes and manages events and needs accurate attendee data.
- **Admin:** platform administrator who manages accounts, categories and monitors statistics.
- **Mail service (external actor):** SMTP provider that delivers notifications.

2.4 Operating environment

Server: Node.js 20+, Next.js 14, PostgreSQL 16, deployed on Vercel with managed PostgreSQL. Client: latest two versions of Chrome, Firefox, Safari and Edge; screens from 320 px wide upward.

2.5 Constraints

Team of three students over three sprints; single deployable web application; all database access through an ORM; transactional email only (no SMS); TLS enforced by the hosting platform; open-source dependencies only.

3. External interface requirements

3.1 User interfaces

Responsive web UI with role-specific navigation; clear error messages (e.g. “event full”, “already registered”); WCAG 2.1 AA conformance (NFR-006).

3.2 Hardware interfaces

None beyond standard client devices; no dedicated hardware.

3.3 Software interfaces

- PostgreSQL via Prisma ORM (authoritative data model: prisma/schema.prisma).
- SMTP (nodemailer) for verification, reset, registration, cancellation, promotion, update and reminder emails.
- JSON REST API under `/api` (documented in SAD 4.3).

3.4 Communications

HTTPS with TLS 1.2 or higher for all traffic; session cookie HttpOnly, SameSite=Lax and Secure in production; SMTP over TLS.

> **Counts (template minimum 15 FRs / 5 NFRs / 2 security objectives / 5 security requirements):** this SRS specifies **20 FRs**, **7 NFRs**, **3 security objectives** and **12 security requirements**.

4. System features (detailed)

Each requirement has acceptance criteria and test references (test IDs are defined in the Test Plan; format `FRnnn-UT_01`). IDs follow `FR-nnn[a-c]`; the letter suffix matches the backlog issue on the GitHub Project board.

4.1 Accounts, authentication and access

Register, verify, authenticate, recover and administer user accounts.

Req ID	Requirement (shall…)	Type	Priority	Source / Stakeholder	Acceptance criteria / Test case ref	Comments / Dependencies
FR-001a	The system shall allow a user to create an account using name, email, password and a role (Participant or Organizer); the account shall be created inactive.	Functional	High	All users / Admin	Account is stored inactive and cannot log in until verified. Malformed email or duplicate email is rejected. Fail: an account becomes active without verification. Tests: FR001-UT_01, FR001-UT_02, FR001-ST_01, FR001-ST_02	Backlog #1, Amogh, Sprint 1, 3 pts
FR-001b	The system shall email a single-use, time-limited verification link and shall activate the account only when the link is used.	Functional	High	All users	After the link is used login succeeds. Used, expired or invalid links are rejected. Fail: account active without verification, or link reusable. Tests: FR001-IT_01, FR001-IT_02, FR001-ST_01	Backlog #2, Amogh, Sprint 1, 2 pts
FR-002a	The system shall allow a verified, non-suspended user to log in with email and password and shall create a session.	Functional	High	All users	Valid credentials log in; wrong credentials give one generic error (no account enumeration); unverified or suspended accounts are refused. Tests: FR002-UT_01, FR002-UT_02, FR002-ST_01, FR003-ST_02	Backlog #3, Amogh, Sprint 1, 2 pts
FR-002b	The system shall let a user reset a forgotten password through an emailed single-use link that expires within 1 hour.	Functional	High	All users	Reset link changes the password and the old password stops working; reused, expired or invalid links are rejected; unknown email gets the same response as a known one. Tests: FR002-IT_01, FR002-IT_02, FR002-ST_01, FR002-ST_02	Backlog #4, Amogh, Sprint 2, 3 pts
FR-003a	The system shall assign each user one role (Admin, Organizer, Participant) and shall restrict features by role on the server.	Functional	High	Admin	Each role performs only permitted actions; a Participant calling an Organizer endpoint receives 403. Fail: a role performs an unauthorized action. Tests: FR003-UT_01, FR003-ST_01, FR004-ST_02	Backlog #5, Amogh, Sprint 1, 5 pts

FR-003b	The system shall let a logged-in user update their own profile name; role and email shall not be editable through this function.	Functional	Medium	All users	Name change is saved and shown on next read; unauthenticated request gets 401; a user cannot change their own role. Tests: FR003-UT_02	Backlog #6, Amogh, Sprint 2, 2 pts
FR-003c	The system shall let an Admin view all accounts and suspend, unsuspend or delete a user; a suspended or deleted account shall lose access immediately.	Functional	High	Admin	Suspended account cannot log in and its live session is invalid on the next request; deleted account cannot log in; an Admin cannot suspend themself; non-admins get 403. Tests: FR003-IT_01, FR003-IT_02, FR003-ST_02	Backlog #7, Amogh, Sprint 2, 3 pts

4.2 Event management and discovery

Organizers manage events; users discover them.

Req ID	Requirement (shall…)	Type	Priority	Source / Stakeholder	Acceptance criteria / Test case ref	Comments / Dependencies
FR-004a	An Organizer shall be able to create an event with name, description, date, time, venue, category and capacity (a positive integer).	Functional	High	Organizer	All fields stored correctly; a missing field or capacity <= 0 is rejected; a Participant cannot create events. Tests: FR004-UT_01, FR004-UT_02, FR004-IT_02, FR004-ST_01, FR004-ST_02	Backlog #8, Shravani, Sprint 1, 3 pts
FR-004b	An Organizer shall be able to modify the details of an event they own after creation; capacity shall not drop below confirmed registrations.	Functional	High	Organizer	Edits are saved and shown immediately; non-owner gets 403; stale edit gets 409; capacity below confirmed seats gets 409. Tests: FR004-IT_01, FR004-IT_02, FR004-ST_01	Backlog #9, Shravani, Sprint 2, 2 pts
FR-005a	An Organizer shall be able to cancel or delete an event they own; a cancelled event shall not accept registrations.	Functional	High	Organizer	Cancelled event rejects registrations; second cancel gets 409; participants and non-owners cannot cancel (403). Tests: FR005-UT_01, FR005-UT_02, FR005-ST_02, FR007-ST_02	Backlog #10, Shravani, Sprint 1, 2 pts
FR-005b	When an event with registered participants is updated or cancelled, the system shall notify all affected participants by email, exactly once each, without failing the primary action if mail fails.	Functional	High	Participant	Every affected participant is notified once, within 5 minutes; mail failure does not fail the cancel/update. Tests: FR005-IT_01, FR005-IT_02, FR005-ST_01, FR005-ST_02	Backlog #11, Shravani, Sprint 2, 3 pts

FR-006a	Users shall be able to view the list of upcoming, non-cancelled events.	Functional	High	Participant	List shows all upcoming non-cancelled events and omits cancelled ones. Tests: FR006-ST_02	Backlog #12, Shravani, Sprint 1, 2 pts
FR-006b	Users shall be able to search events by name and filter by category, date or venue.	Functional	High	Participant	Results contain only matching events; filters combine; special characters are treated as plain text. Tests: FR006-UT_01, FR006-UT_02, FR006-IT_02, FR006-ST_01, FR006-ST_02	Backlog #13, Shravani, Sprint 2, 3 pts
FR-006c	An Admin shall be able to add, rename and remove event categories; changes shall be reflected platform-wide.	Functional	Medium	Admin	Added category is selectable; rename updates every event; a category in use cannot be removed; non-admins get 403. Tests: FR006-IT_01	Backlog #14, Shravani, Sprint 2, 2 pts

4.3 Registration

Register with capacity control, waitlist and notifications.

Req ID	Requirement (shall…)	Type	Priority	Source / Stakeholder	Acceptance criteria / Test case ref	Comments / Dependencies
FR-007	A logged-in user shall be able to register for an event; the system shall store user, event, timestamp and status and shall prevent duplicate registrations.	Functional	High	Participant	A valid registration creates exactly one record; a second attempt is rejected (409). Tests: FR007-UT_01, FR007-UT_02, FR007-IT_01, FR007-IT_02, FR007-ST_01, FR007-ST_02	Backlog #15, Arjun, Sprint 1, 3 pts
FR-008	The system shall verify remaining capacity before confirming a registration and shall reject registrations when the event is full, including under concurrency.	Functional	High	Participant	A full event rejects registration; of 100 simultaneous requests for a 1-seat event exactly one is confirmed. Tests: FR007-IT_01, FR008-UT_01, FR008-UT_02, FR008-IT_01, FR008-IT_02, FR008-ST_01, FR008-ST_02	Backlog #16, Arjun, Sprint 1, 8 pts
FR-009a	When an event is full, users shall be able to join a waitlist; when a seat frees, the first waitlisted user shall be promoted and notified automatically.	Functional	Medium	Participant	Waitlist is FIFO; the first waitlisted user is promoted and notified when a seat becomes available. Tests: FR008-ST_02, FR009-UT_01, FR009-IT_01, FR009-ST_01	Backlog #17, Arjun, Sprint 2, 5 pts

FR-009b	Users shall be able to cancel their own registration; the system shall send registration, cancellation and event-reminder notifications.	Functional	Medium	Participant	Cancellation updates status and seat count immediately; confirmation, cancellation and reminder emails are sent; reminders are not re-sent. Tests: FR009-UT_02, FR009-IT_02, FR009-ST_02	Backlog #18, Arjun, Sprint 2, 3 pts

4.4 Reporting

Counts, exports and platform statistics.

Req ID	Requirement (shall…)	Type	Priority	Source / Stakeholder	Acceptance criteria / Test case ref	Comments / Dependencies
FR-010a	The system shall display registered counts and available seats per event and let an Organizer export the participant list as CSV or PDF.	Functional	Medium	Organizer	Displayed and exported counts match active registrations; only the owning organizer (or admin) can export. Tests: FR007-IT_02, FR010-UT_01, FR010-UT_02, FR010-IT_01, FR010-IT_02, FR010-ST_02	Backlog #19, Arjun, Sprint 2, 3 pts
FR-010b	An Admin shall be able to view platform-wide totals of events, users and registrations.	Functional	Medium	Admin	Displayed totals equal the live database totals; non-admins are rejected. Tests: FR010-ST_01	Backlog #20, Arjun, Sprint 2, 2 pts

5. Non-functional requirements (detailed)

NFRs are measurable and tied to test cases in the Test Plan §5.3 and §5.1.

Req ID	Requirement	Category	Priority	Acceptance criteria / Measurement	Backlog
NFR-001	Event list and search/filter pages shall load within 2 s and a registration shall complete within 3 s at the 95th percentile with 500 concurrent users; a 5,000-record CSV/PDF export shall complete within 10 s.	Performance	High	p95 <= 2 s (list/search), <= 3 s (registration), export <= 10 s. Test: NFT_01, NFT_02	no backlog item
NFR-002	The system shall support 10,000 users, 1,000 active events and 100,000 registrations without degradation and shall execute concurrent operations atomically (no overbooking, duplicate or lost update).	Scalability and concurrency	High	100 simultaneous requests for a 1-seat event confirm exactly one; 100 duplicate requests create one record; waitlist order is FIFO. Test: NFT_03, NFT_04	no backlog item
NFR-003	Passwords shall be stored only as salted hashes (bcrypt/scrypt/Argon2); verification/reset links shall be single-use, random and time-limited; all traffic shall use TLS 1.2+; sensitive data at rest shall be encrypted.	Security - data protection	High	No plain-text password in DB/logs; used/expired link rejected; TLS >= 1.2. Test: NFT_05, SEC_01, SEC_06, SEC_12	no backlog item
NFR-004	RBAC shall be enforced server-side on every request; sessions shall expire after 30 minutes of inactivity; accounts shall lock after 5 consecutive failed logins; OWASP Top 10 protections shall apply; administrative actions shall be audit-logged for 12 months.	Security - access control	High	Unauthorized API call returns 403; idle session rejected after 30 min; lock after 5 failures; each admin action logged. Test: NFT_06, SEC_03, SEC_04, SEC_10, SEC_11, SEC_13	#59, Amogh, Sprint 3, 3 pts
NFR-005	The system shall be available 99.5% of each month (excluding <= 4 h announced maintenance); data shall be backed up daily and restorable with RPO <= 24 h and RTO <= 4 h.	Availability and recovery	High	Monthly uptime >= 99.5%; restore drill <= 4 h and <= 24 h data loss. Test: NFT_07	no backlog item
NFR-006	A first-time participant shall find an event and register within 3 minutes without training; the interface shall meet WCAG 2.1 AA, be responsive from 320 px upward and work on the latest two versions of Chrome, Firefox, Safari and Edge.	Usability and accessibility	Medium	>= 90% of first-time users succeed within 3 min; no WCAG AA failures; no horizontal scroll at 320 px. Test: NFT_08, NFT_11	#61, Shravani, Sprint 3, 3 pts
NFR-007	Application errors shall be logged centrally with timestamp and severity, and the codebase shall have at least 80% automated test coverage of core business logic.	Maintainability	Medium	Forced error appears in central log with timestamp and severity; coverage >= 80% for core modules. Test: NFT_09, NFT_10	#62, Shravani, Sprint 3, 2 pts

5.1 Security

5.1.1 Security objectives

ID	Objective	Description

SO-1	Confidentiality	Protect credentials and personal data (name, email) from disclosure, in storage and in transit.
SO-2	Integrity and least privilege	Ensure only authorized, authenticated actors can read or change events, registrations and accounts, and that data cannot be corrupted by malformed input or concurrent requests.
SO-3	Availability and accountability	Resist brute-force and abuse, keep a durable record of security-relevant actions, and keep data recoverable after failure.

5.1.2 Security requirements

Derived from Documents/SECURITY_DOCUMENT.pdf (SRSec). “Status in main” is the verified state of the delivered code as of 13 Nov 2026.

Req ID	Requirement (shall…)	SRSec §	Objective	NFR	Test case ref	Status in main	Where / note
SR-001	Passwords shall be stored only as salted bcrypt/Argon2 hashes and never logged.	2.1	SO-1	NFR-003	SEC_01	**Met**	bcryptjs cost 12 in signup / reset-password
SR-002	Session cookies shall be HttpOnly, SameSite and Secure (production), HMAC-signed, and shall expire after 30 minutes of inactivity.	2.2	SO-1, SO-2	NFR-004	SEC_02, SEC_11	**Partial**	Cookie flags and HMAC met; expiry is a 7-day absolute TTL, not 30 min idle
SR-003	The account shall lock after 5 consecutive failed login attempts.	2.3	SO-3	NFR-004	SEC_03	**Not met in main**	Implemented only in uncommitted local work (app/api/auth/login/route.ts); not merged, no tests
SR-004	RBAC and least privilege shall be enforced on the server for every request; no client-supplied role claim shall be trusted.	3.1, 3.2	SO-2	NFR-004	SEC_04, SEC_13	**Partial**	requireAdmin uses real sessions only; the Organizer/Participant demo fallback still trusts x-user-role / event_session_role
SR-005	Object references shall be authorized server-side (ownership checks) to prevent IDOR.	3.3	SO-2	NFR-004	SEC_05	**Met**	event.organizerId checks in app/api/events/[id], export, registrations
SR-006	All client-server traffic shall use TLS 1.2 or higher.	4.1	SO-1	NFR-003	SEC_06	**Met (hosting)**	Enforced by the hosting platform (Vercel); not independently scanned
SR-007	Sensitive data at rest shall be encrypted.	4.2	SO-1	NFR-003	SEC_06	**Met (hosting)**	Managed PostgreSQL encryption at rest; no application-level field encryption
SR-008	All database access shall use parameterized queries / an ORM.	5.1	SO-2	NFR-004	SEC_07	**Met**	Prisma only; no raw SQL

SR-009	User-supplied input shall be validated and output encoded to prevent XSS.	5.2	SO-2	NFR-004	SEC_08, SEC_15	**Met**	zod validation, escapeHtml in emails, React escaping, CSV formula neutralization
SR-010	State-changing requests shall be protected against CSRF.	5.3	SO-2	NFR-004	SEC_09	**Partial**	SameSite=Lax cookie only; no anti-CSRF token
SR-011	Security events and administrative actions shall be recorded in a durable audit log (12 months) without secrets or plain-text passwords.	6.1, 6.2	SO-3	NFR-004, NFR-007	SEC_10	**Not met in main**	AuditLog model and logEvent exist only in uncommitted local work; main logs console.error only
SR-012	Verification and reset tokens shall be random, single-use, time-limited and stored hashed; login errors shall not reveal whether an account exists.	2.1	SO-1	NFR-003	SEC_12, SEC_14	**Met**	lib/tokens.ts (sha256 hash, usedAt, expiresAt)

6. Quality attributes & acceptance tests

- **Exit criteria for acceptance:** all High-priority FRs implemented and verified, no critical NFR failure open without a documented deviation, and the RTM shows every requirement mapped to at least one executed test case.
- **Acceptance test suites:** Accounts, Events, Registration & Concurrency, Reporting, Performance, Security, Accessibility (Test Plan §5).
- **Documented deviations** (requirements not fully met at the Sprint 2 freeze) are listed in SAD 4.6 and in the Test Plan §14.

7. System models and diagrams

7.1 UML use case diagrams

Two use case diagrams are provided: (1) the overall system view; (2) the account, access and administration view with the security-related use cases. Detailed use case flows (main and alternate) are in Documents/USECASE_FLOW.pdf.

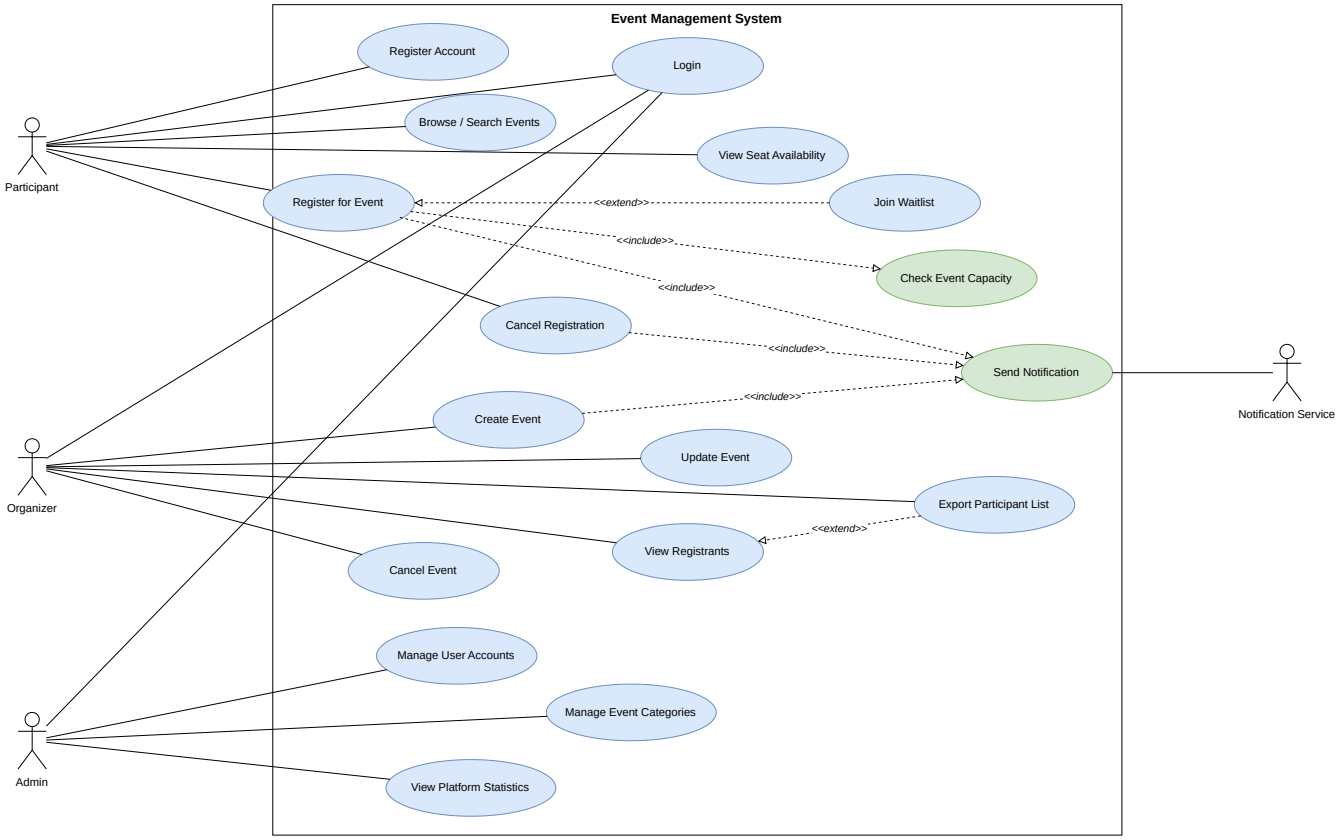


Figure 1 — Use case diagram 1: Event Management System (overall)

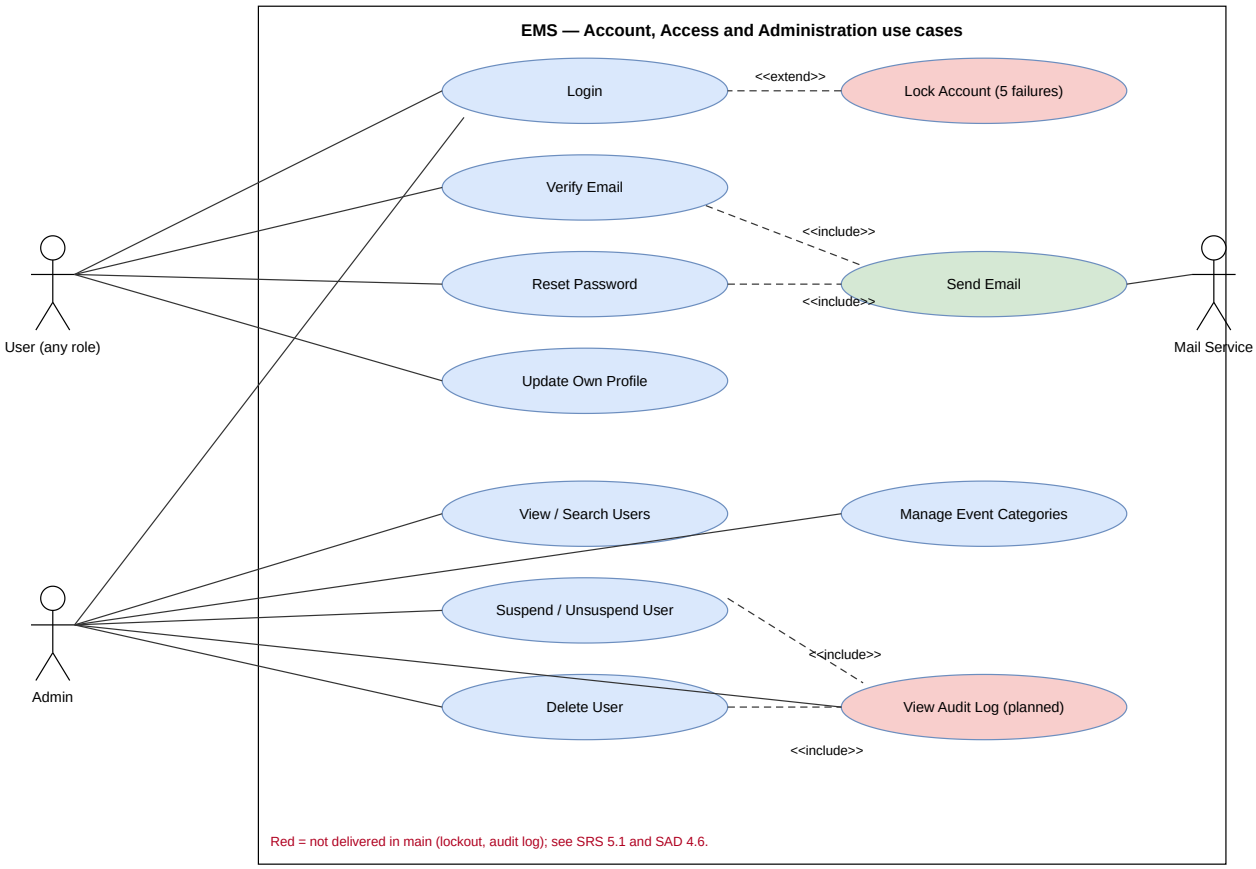


Figure 2 — Use case diagram 2: account, access and administration (includes security use cases)

8. Requirements Traceability Matrix (RTM)

Status legend: **P** = verified passed; **A** = accepted/documented deviation or partially met (see Test Plan §14); **N** = not yet verified. The separate lists SRS→Test and Security→Test are in Documents/TRACEABILITY_MATRICES.pdf.

Req ID	Requirement short	Section	Design (SAD component)	Module	Test case(s)	Status
FR-001a	Account creation	4	Authentication	app/api/auth/signup	FR001-UT_01, FR001-UT_02, FR001-ST_01, FR001-ST_02	P
FR-001b	Email verification	4	Authentication	app/api/auth/verify, lib/tokens.ts	FR001-IT_01, FR001-IT_02, FR001-ST_01	P
FR-002a	Login	4	Authentication	app/api/auth/login, lib/session.ts	FR002-UT_01, FR002-UT_02, FR002-ST_01, FR003-ST_02	P
FR-002b	Password reset	4	Authentication	app/api/auth/forgot-password, reset-password	FR002-IT_01, FR002-IT_02, FR002-ST_01, FR002-ST_02	P
FR-003a	Role-based access control	4	Authentication	lib/auth.ts	FR003-UT_01, FR003-ST_01, FR004-ST_02	P
FR-003b	Profile update	4	Authentication	app/api/auth/me	FR003-UT_02	P
FR-003c	Admin manages user accounts	4	UserAccounts	app/api/admin/users	FR003-IT_01, FR003-IT_02, FR003-ST_02	P
FR-004a	Create event	4	EventManager	app/api/events	FR004-UT_01, FR004-UT_02, FR004-IT_02, FR004-ST_01, FR004-ST_02	P
FR-004b	Edit event	4	EventManager	app/api/events/[id] (PUT)	FR004-IT_01, FR004-IT_02, FR004-ST_01	P
FR-005a	Cancel or delete event	4	EventManager	app/api/events/[id] (PATCH, DELETE)	FR005-UT_01, FR005-UT_02, FR005-ST_02, FR007-ST_02	P
FR-005b	Notify participants of change	4	NotificationService	lib/registration.ts, lib/emailTemplates.ts	FR005-IT_01, FR005-IT_02, FR005-ST_01, FR005-ST_02	P
FR-006a	View events	4	EventCatalog	app/events, app/api/events (GET)	FR006-ST_02	P
FR-006b	Search and filter events	4	EventCatalog	lib/eventFilters.ts	FR006-UT_01, FR006-UT_02, FR006-IT_02, FR006-ST_01, FR006-ST_02	P

FR-006c	Admin manages categories	4	Categories	lib/categories.ts, app/api/admin/categories	FR006-IT_01	P
FR-007	Register for event	4	Registration	app/api/events/[id]/register	FR007-UT_01, FR007-UT_02, FR007-IT_01, FR007-IT_02, FR007-ST_01, FR007-ST_02	P
FR-008	Capacity check	4	CapacityCheck	lib/registration.ts	FR007-IT_01, FR008-UT_01, FR008-UT_02, FR008-IT_01, FR008-IT_02, FR008-ST_01, FR008-ST_02	P
FR-009a	Waitlist with auto-promotion	4	Waitlist	lib/registration.ts	FR008-ST_02, FR009-UT_01, FR009-IT_01, FR009-ST_01	P
FR-009b	Self-cancellation and notifications	4	Registration, NotificationService	lib/registration.ts, app/api/reminders	FR009-UT_02, FR009-IT_02, FR009-ST_02	P
FR-010a	Counts, seat availability and export	4	Reports	lib/export.ts	FR007-IT_02, FR010-UT_01, FR010-UT_02, FR010-IT_01, FR010-IT_02, FR010-ST_02	P
FR-010b	Admin platform statistics	4	Reports	lib/stats.ts, app/api/admin/stats	FR010-ST_01	P
NFR-001	Event list and search/filter pages shall load within 2 s and…	5	cross-cutting (SAD 3.8)	see SAD 3.8	NFT_01, NFT_02	A
NFR-002	The system shall support 10,000 users, 1,000 active events a…	5	cross-cutting (SAD 3.8)	see SAD 3.8	NFT_03, NFT_04	P
NFR-003	Passwords shall be stored only as salted hashes (bcrypt/scry…	5	cross-cutting (SAD 3.8)	see SAD 3.8	NFT_05, SEC_01, SEC_06, SEC_12	P
NFR-004	RBAC shall be enforced server-side on every request; session…	5	cross-cutting (SAD 3.8)	see SAD 3.8	NFT_06, SEC_03, SEC_04, SEC_05, SEC_09, SEC_10, SEC_11, SEC_13	A
NFR-005	The system shall be available 99.5% of each month (excluding…	5	cross-cutting (SAD 3.8)	see SAD 3.8	NFT_07	A

NFR-006	A first-time participant shall find an event and register wi…	5	cross-cutting (SAD 3.8)	see SAD 3.8	NFT_08, NFT_11	A
NFR-007	Application errors shall be logged centrally with timestamp …	5	cross-cutting (SAD 3.8)	see SAD 3.8	NFT_09, NFT_10	A