PCP Web Api Architecture & Endpoints

Rev.	Date	Revision description	Major	Minor	Issued by	Checked by	Approved by
0	18/06/2025	Prima emissione	-	-	Inserire firma Carmine C.	Inserire firma Ainci S.	Inserire firma Arinci S.

Title	Inserire titolo documento	Language Italiano	Revision 0

Sheet 1 of 7

"Proprietary information of Fincantieri NexTech S.p.A. - All rights reserved - Strictly confidential - Reproduction, use or disclosure to third parties without express consent is forbidden"

File:

e76d9de933c3d556dadd99672c4354d77e3839529b13ae23faaa863ed67373c0

Template word generale Rev.1 del 31.01.2022 FC NXT

REVISION HISTORY

Revision	Date	Chapter/Section	Description
0	18/06/2025	Initial	Initial
1			
2			
3			
4			

"Proprietary information of Fincantieri NexTech S.p.A. - All rights reserved - Strictly confidential - Reproduction, use or disclosure to third parties without express consent is forbidden"

Contents

1. Architecture 4
1.1 One Value Request 5
1.2 Multiple Value Request 6

"Proprietary information of Fincantieri NexTech S.p.A. - All rights reserved - Strictly confidential - Reproduction, use or disclosure to third parties without express consent is forbidden"

1. Architecture

The following image describe the architecture of the actual system.
For the client side the only things that has to know is the endpoint of the web api rest, to be called to retrieve the information regarding the values ot the tags of the automation system.

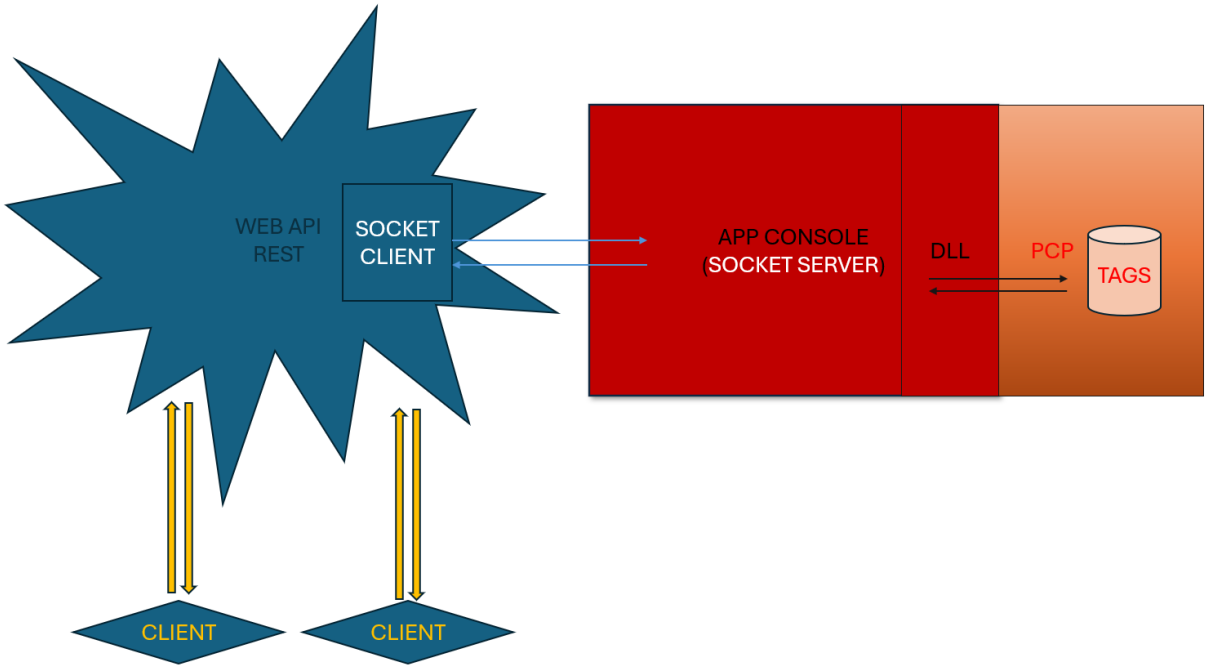


```
• curl --location 'http://{IP}:8080/api/Pcp/GetTag?tagName=ACK_MESS_ID'

• curl --location 'http://{IP}:8080/api/Pcp/GetTags?tagsName={NOMETAG1}%{NOMETAG2}
```


"Proprietary information of Fincantieri NexTech S.p.A. - All rights reserved - Strictly confidential - Reproduction, use or disclosure to third parties without express consent is forbidden"

1.1 One Value Request

Following the example to how to receive one value for a requested tag name from PCPWebServer of the Server.
Insert the correct IP and replace the NOMETAG with the name of the tag you want to query.

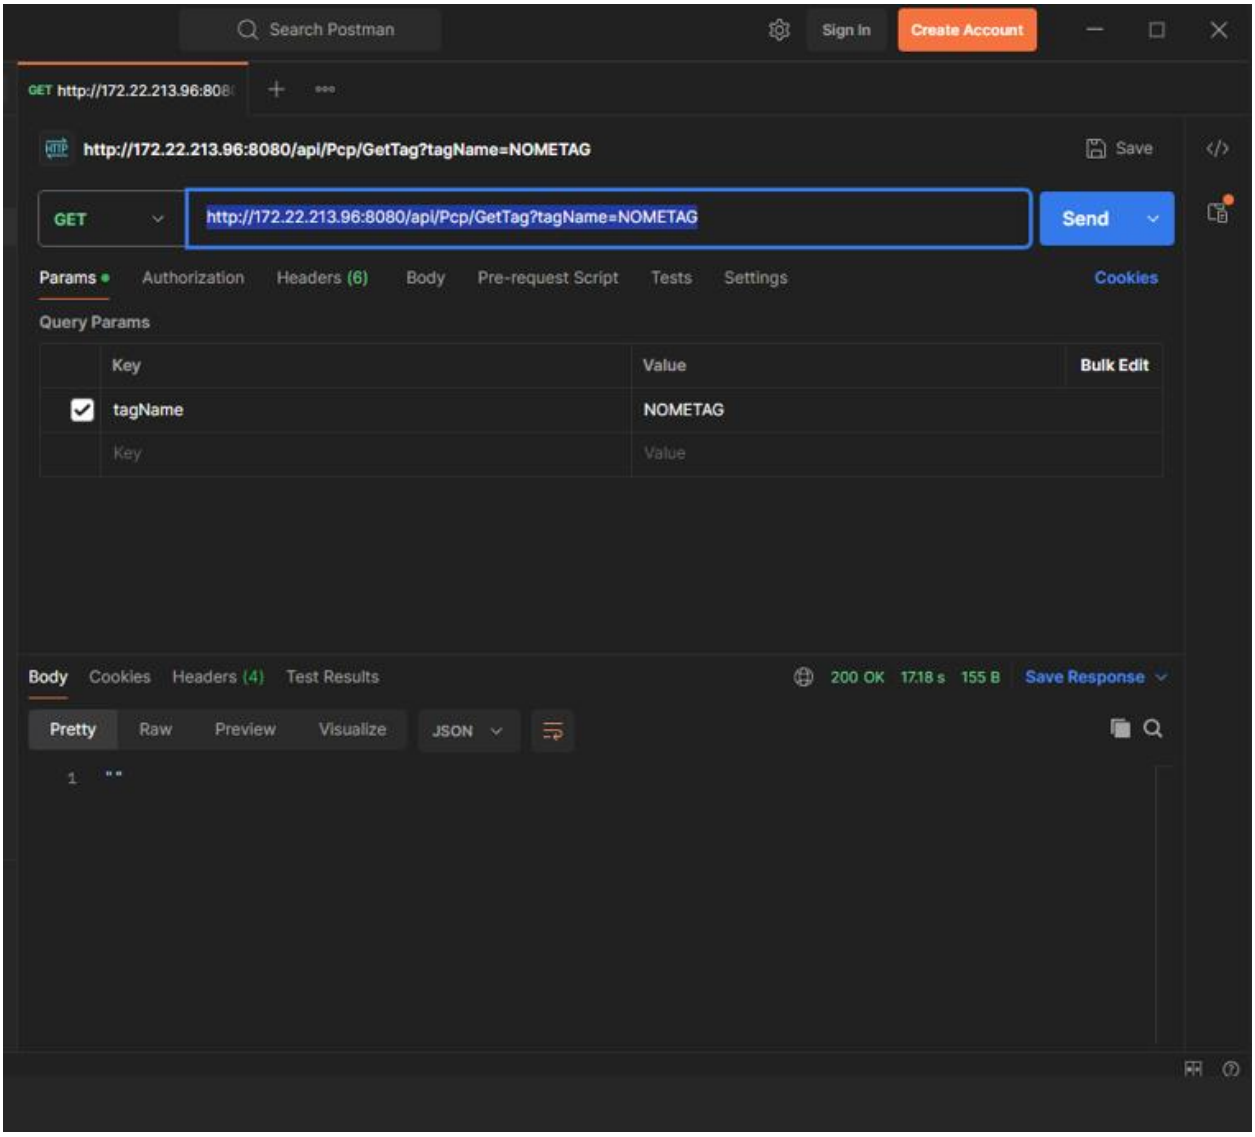

"Proprietary information of Fincantieri NexTech S.p.A. - All rights reserved - Strictly confidential - Reproduction, use or disclosure to third parties without express consent is forbidden"

1.2 Multiple Value Request

Following the example to how to receive multiple values for a requested tags name from PCPWebServer of the Server.
Insert the correct IP and replace the NOMETAG1, NOMETAG2, NOMETAG3 with the name of the tags you want to query. If you want to add more tags name, just add semicolon and another tag name, like the previously tag name in the example.

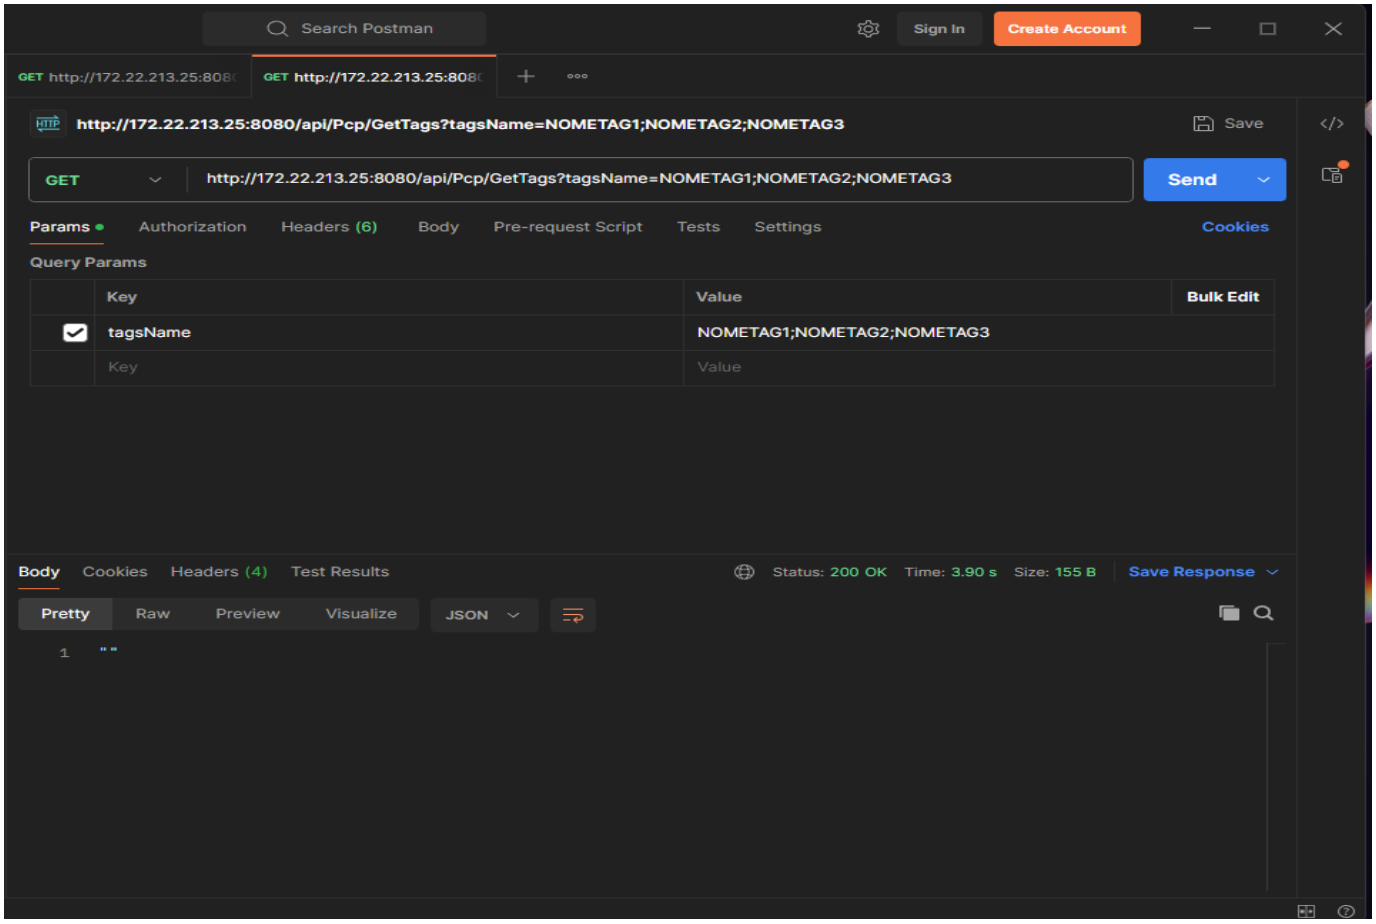

"Proprietary information of Fincantieri NexTech S.p.A. - All rights reserved - Strictly confidential - Reproduction, use or disclosure to third parties without express consent is forbidden"