

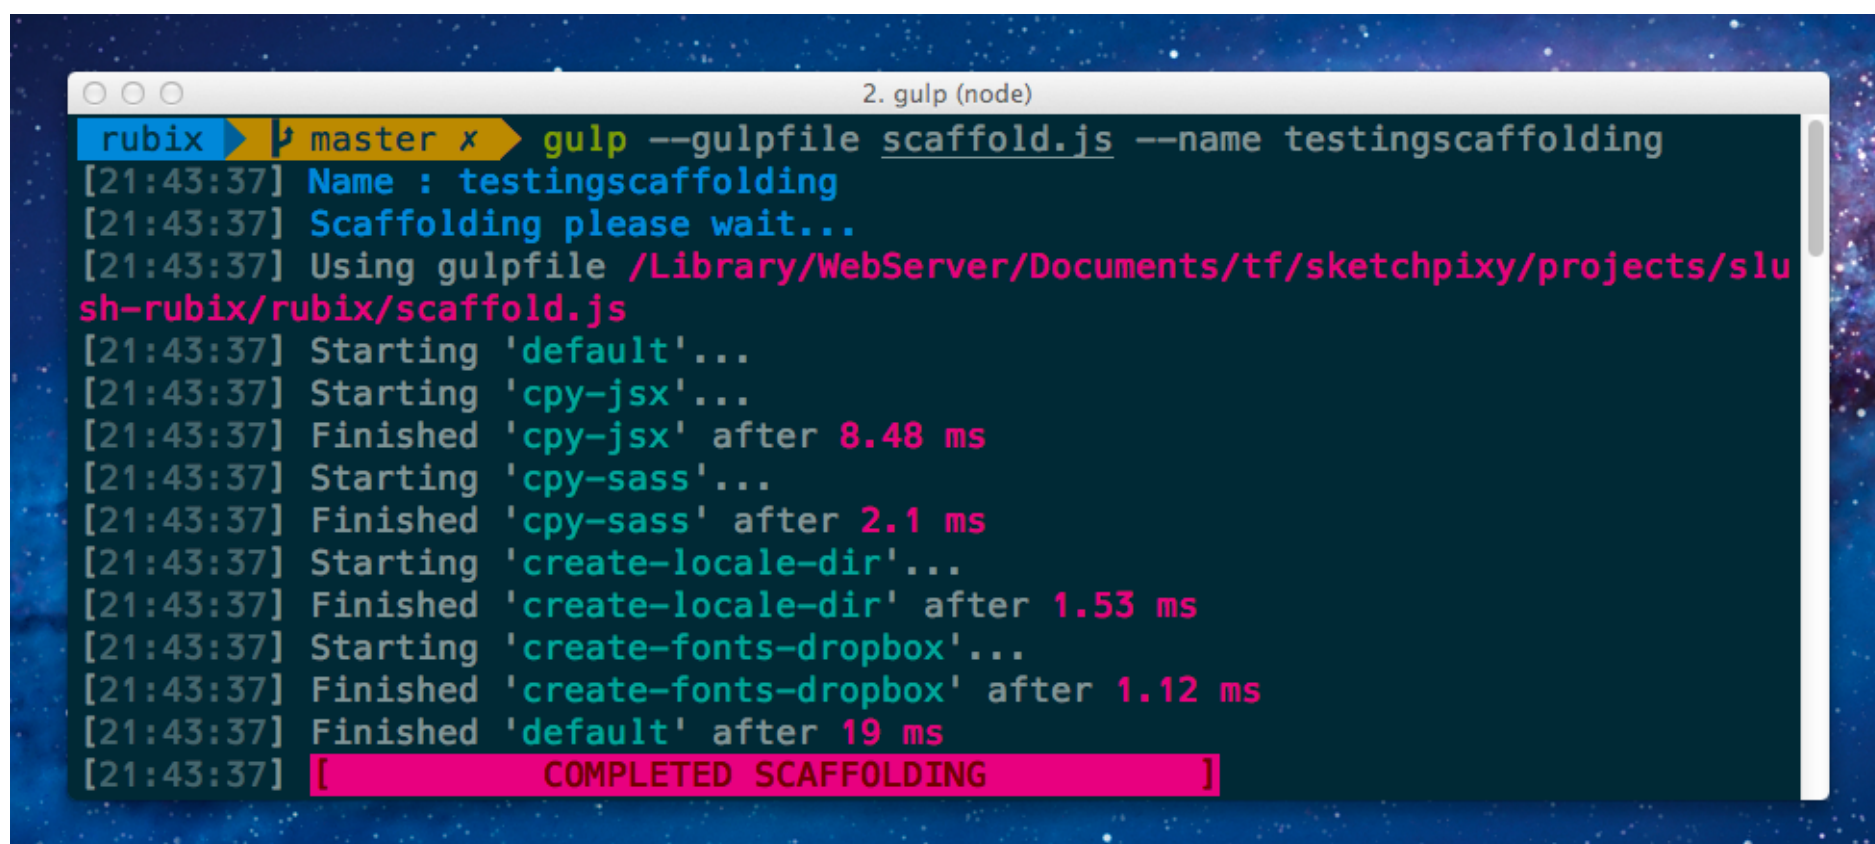
Gulpfile: Client-side Scaffolding (*Disabled for Rails*)

To scaffold a new project just run the following command from your terminal/command prompt (we assume the name of your project to be **testingscaffolding**):

Not available for Ruby on Rails. Copy seed project instead.

```
$ gulp --gulpfile scaffold.js --name testingscaffolding
```

This is a screenshot of the output:

A screenshot of a terminal window titled "2. gulp (node)". The terminal shows the execution of the command "gulp --gulpfile scaffold.js --name testingscaffolding". The output is as follows:

```
rubix ➤ master x ➤ gulp --gulpfile scaffold.js --name testingscaffolding
[21:43:37] Name : testingscaffolding
[21:43:37] Scaffolding please wait...
[21:43:37] Using gulpfile /Library/WebServer/Documents/tf/sketchpixy/projects/slu
sh-rubix/rubix/scaffold.js
[21:43:37] Starting 'default'...
[21:43:37] Starting 'cpy-jsx'...
[21:43:37] Finished 'cpy-jsx' after 8.48 ms
[21:43:37] Starting 'cpy-sass'...
[21:43:37] Finished 'cpy-sass' after 2.1 ms
[21:43:37] Starting 'create-locale-dir'...
[21:43:37] Finished 'create-locale-dir' after 1.53 ms
[21:43:37] Starting 'create-fonts-dropbox'...
[21:43:37] Finished 'create-fonts-dropbox' after 1.12 ms
[21:43:37] Finished 'default' after 19 ms
[21:43:37] [ COMPLETED SCAFFOLDING ]
```

© 2014 SketchPixy Creative - v3.0.0