


Train with retrieved context

- RAFT puts chunks in the prompt at train time, not only at demo time.
- Include negatives so the model practices ignoring junk.

RAFT: retrieval is in the training loop, not only at demo time

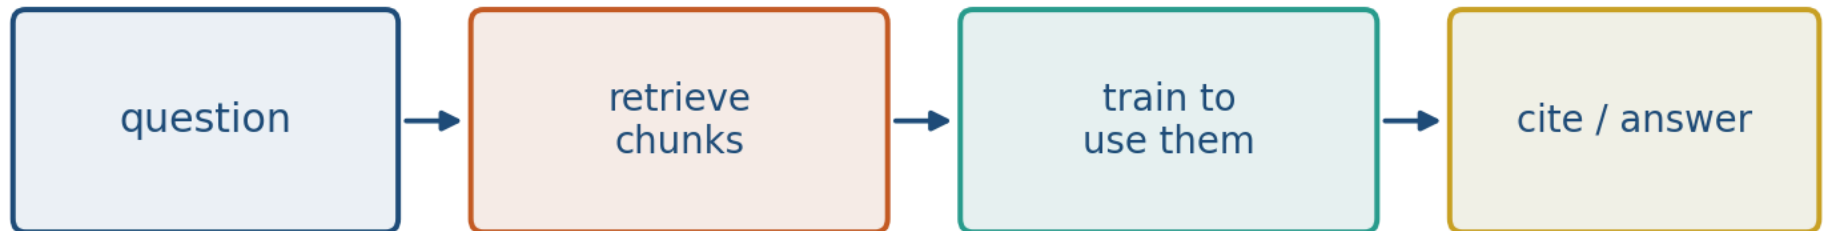

Two stores

- Weights are parametric. An index is not.
- Editing one does not automatically fix the other.

Two stores. Editing one does not automatically fix the other.

weights
(parametric)

index / docs
(non-parametric)