


Thesis Experiments

Summary

- Unconditioned Model Pipeline
- 1st conditioned Model Pipeline
- 2nd conditioned Model Pipeline
- Comparing Results


Unconditioned Model:

- Similar Pipeline Architecture of Learn2Listen Paper

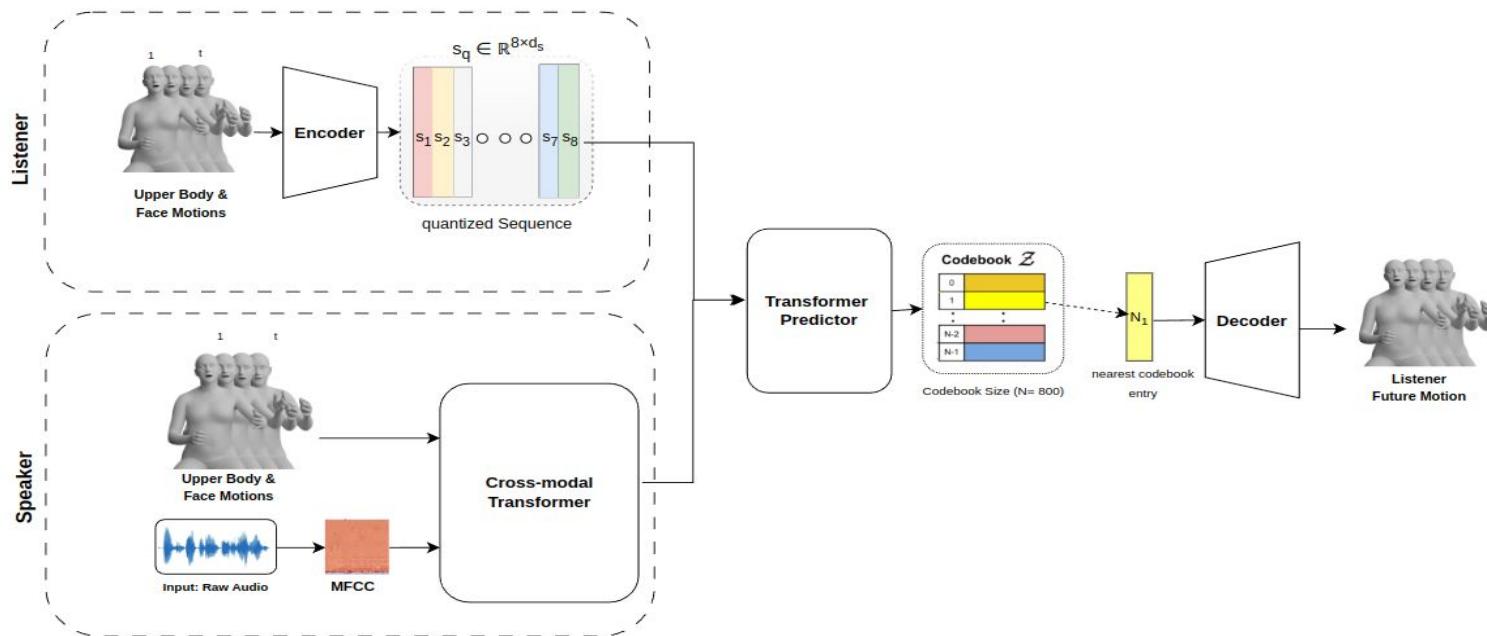


1st Conditioned Model:

- Adding Conditioned MLP on the Previous Architecture In the listener block below

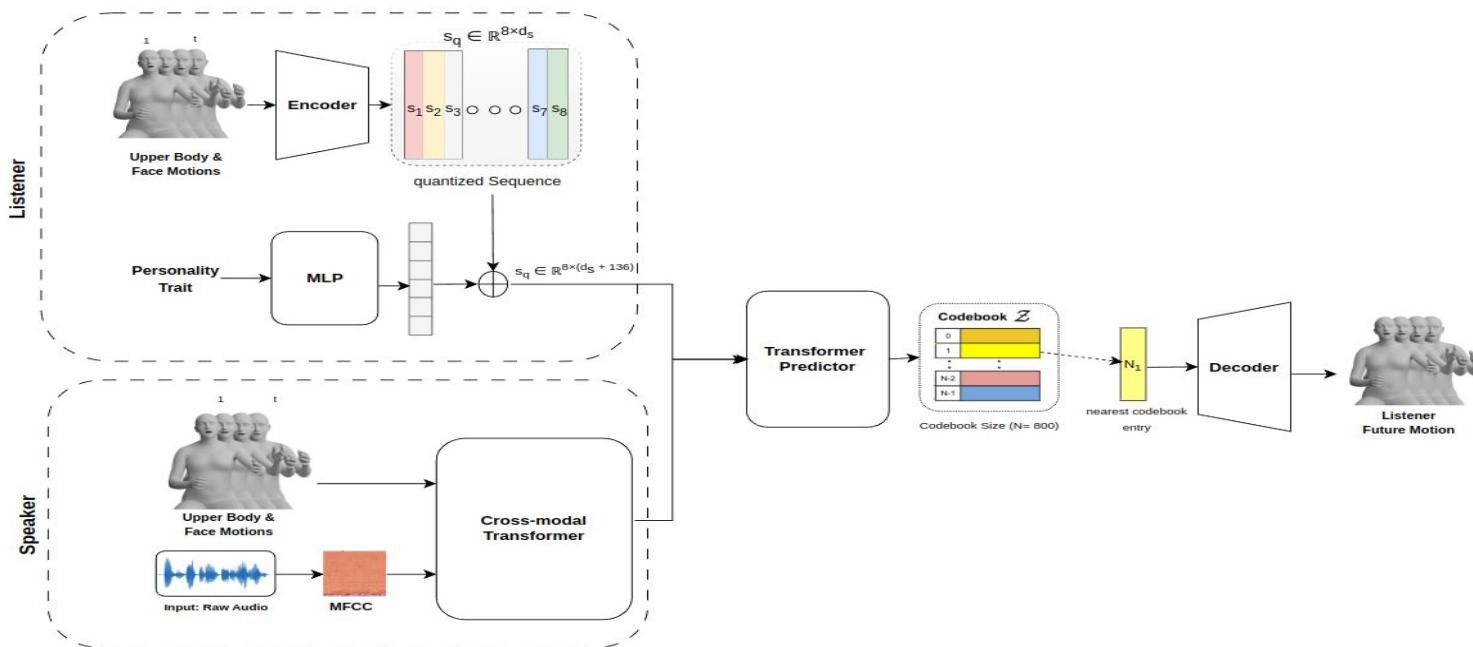

2nd Conditioned Model

- Updating previous architecture for speaker motion input (please look below to speaker block) : using only facial features (expression and jaw) as input for the cross model transformer and concatenating the cross transformer

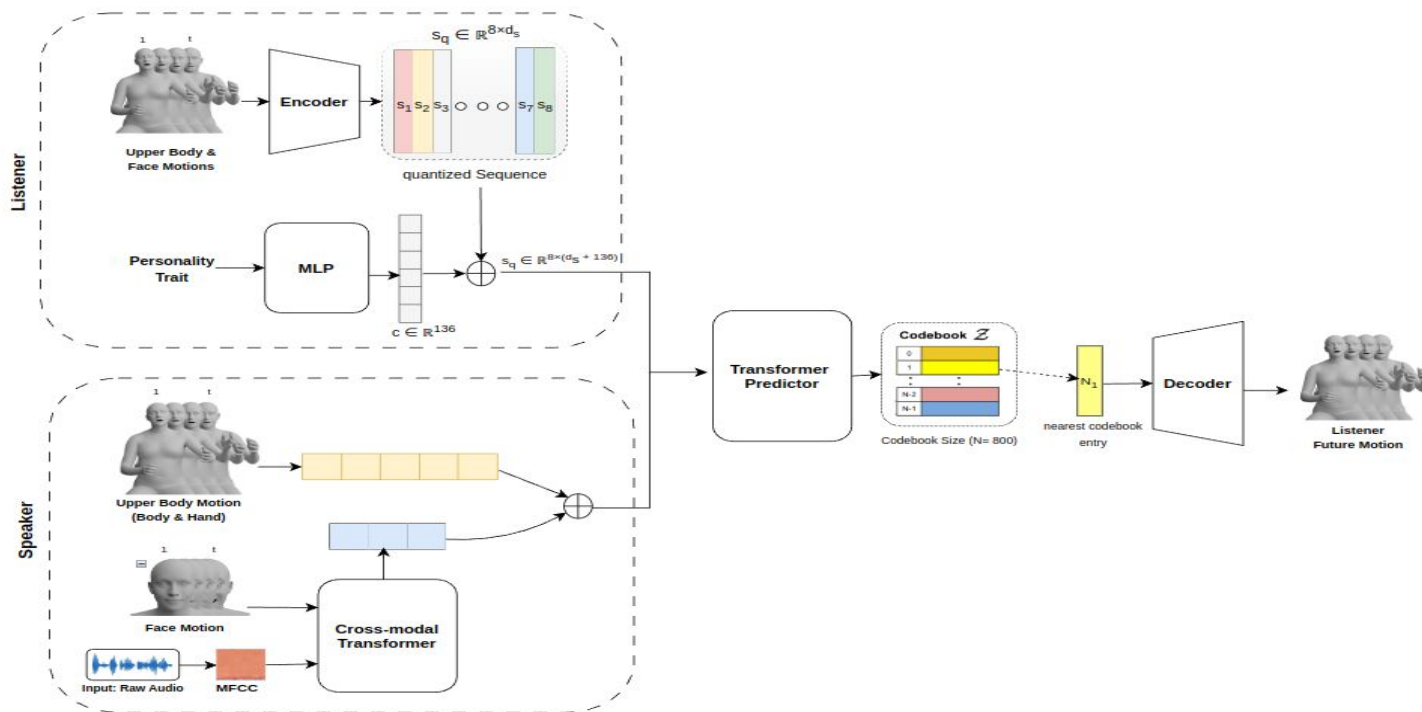

Comparing Results

	Face (expression & jaw)				Upper Body (Body & hand)			
Model	L2 ↓	FD ↓	P-FD ↓	Var	L2 ↓	FD ↓	P-FD ↓	Var
Unconditioned Model	32.452	7.67	10.47	1.389	75.289	58.873	96.815	0.974
1st Conditioned Model	33.051	8.654	11.939	1.491	74.413	51.898	91.492	0.836
2nd Conditioned Model	32.134	6.169	10.312	1.543	74.257	48.059	89.715	1.029

Abbreviations Key:

- **L2**: L2 Distance
- **FD**: Fréchet Distance
- **P-FD**: Paired Fréchet Distance const. Speaker and listener
- **Var**: Temporal Diversity Score (Variance)