

# Welcome to PANKEGG



Welcome to the Pankegg documentation. Here you will find all the information you need to get started with Pankegg.

## Overview

*A powerful parser and visualizer for metagenome bin annotation, classification, and quality assessment.*

Pankegg is a flexible and user-friendly interactive software suite built with Python, SQL, Jinja, JavaScript, and Flask, designed to visualize and compare bin annotations, taxonomic classifications, and quality metrics (estimated by CheckM2). It enables interactive exploration and comparison of results across bins and samples through a local web server interface.

Pankegg is ideal for anyone working with output files from CheckM2, EggNOG, Sourmash, or GTDB-TK. While it can be integrated into any workflow, it was originally conceived as the final step of the [MUFFIN pipeline](#) to provide a comprehensive visualization and analysis platform.

## Mission Statement

Pankegg aims to provide a comprehensive tool for the analysis and visualization of metabolic pathways across various samples and bins.

Our goal is to facilitate research and understanding in the field of metagenomics and bioinformatics.

## Features and Benefits

- Compare samples and bins with ease
- Visualize taxonomic compositions
- Analyze pathway completions
- Export data for further analysis

## Table of contents

Overview . . . . .	1
Mission Statement . . . . .	2
Features and Benefits . . . . .	2
<b>Getting started</b>	<b>3</b>
Install Pankegg and Dependencies . . . . .	4
Download Example Test Data (optional) . . . . .	4
Build the SQL Database (optional) . . . . .	4
Launch the Web Application . . . . .	4
Open web browser . . . . .	5
Input files . . . . .	5
Additional Input Files Provided by Pankegg . . . . .	5
<b>Installation</b>	<b>6</b>
Install PANKEGG . . . . .	6
Download via wget or curl . . . . .	6
Clone via git . . . . .	6
Install dependencies . . . . .	6
Using conda . . . . .	7
Using pip . . . . .	7
Using pixi . . . . .	7
Windows Subsystem for Linux . . . . .	8
<b>The tools</b>	<b>8</b>
Navigation and Search Pages . . . . .	8

Feature Pages . . . . .	9
Input file format . . . . .	10
Create the input file . . . . .	10
Parameters Make DB . . . . .	12
Output Make DB . . . . .	12
Run with Testdata . . . . .	13
Download the test data archive from OSF: . . . . .	13
Unzip the archive: . . . . .	13
Create a test database for Sourmash classification: . . . . .	13
Create a test database for GTDB-TK classification: . . . . .	14
Troubleshooting . . . . .	14
Input file . . . . .	14
Usage APP . . . . .	14
Parameters APP . . . . .	15
Output APP . . . . .	15
Run with Testdata . . . . .	15
Troubleshooting . . . . .	16
<b>Web Interface</b> . . . . .	<b>16</b>
Home . . . . .	16
Bin . . . . .	17
Map . . . . .	18
Filtering and Search . . . . .	19
Viewing KO Details . . . . .	19
KEGG Info and Pathway Highlighting . . . . .	19
KEGG . . . . .	21
Taxonomy . . . . .	22
Sample vs Sample . . . . .	23
Bin vs Bin . . . . .	26
Taxonomy Comparison . . . . .	27
PCA . . . . .	29
<b>Additional Information</b> . . . . .	<b>29</b>
Reporting Bugs & Contributing . . . . .	29
AI and LLM . . . . .	30

## Getting started

This quickstart guide will walk you through setting up Pankegg, running the pipeline on test data, and launching the web application to explore your results.

## Install Pankegg and Dependencies

Install Pankegg via pip, conda, or pixi.  
See the [Installation](#) section for detailed options.

```
wget https://github.com/RVanDamme/PANKEGG/archive/refs/heads/master.zip
unzip master.zip
cd PANKEGG-master
pip install .
```

## Download Example Test Data (optional)

Download and extract the example dataset:

```
wget https://osf.io/5v3zc/download -O pankegg_test_data.zip
unzip pankegg_test_data.zip
```

## Build the SQL Database (optional)

Generate a Pankegg database from the provided CSV using the included test data (for both Sourmash and GTDB-TK classification):

```
python pankegg_make_db.py -i pankegg_test_data/sourmash_example.csv -o test_sourmash --output
```

## Launch the Web Application

Start the web server using the database present in the repository:

```
python pankegg_app.py --d data/pankegg.db
```

or use the the database you generated in point 3:

```
python pankegg_app.py --d pankegg_test_data/test_sourmash
```

## Open web browser

Now, open your web browser and go to the IP address written in your terminal ( <http://0.0.0.0:5000>) to interactively explore your metagenomic data!

Pankegg was developed to integrate output files from a variety of metagenomics tools, such as CheckM2, Sourmash, GTDB-TK and EggNOG. You can combine them all, or only add the ones that are interesting for you.

## Input files

Table 1: Supported input files

Tool	Input File	Data Extracted
checkm2	quality_report.tsv	bin completeness and contamination
Sourmash	*.txt	ID, Status and Taxonomic classification
GTDDB-TK	*.summary.tsv	User genome and Taxonomic classification
EggNOG	*.annotations.tsv	KEGG Orthologs, KEGG Pathways, GO terms, Description

## Additional Input Files Provided by Pankegg

PANKEGG requires more input files. However, these are already provided and you don't need to worry about them. They are located in the **data** directory.

Table 2: Additional input, built into PANKEGG

File Name	Description	Data Origin
kegg_map_info.txt	Contains mapID, pathway name, and total number of orthologs per pathway (map)	Extracted from KEGG pathway database
kegg_map_orthologs.txt	Contains mapID, pathway name, and list of orthologs per pathway (map)	Extracted from KEGG pathway database
ko.txt	Contains the IDs and names of orthologs	Extracted from KEGG orthologs database
pathway.txt	Contains map IDs (pathways) and their names	Extracted from KEGG pathway database

File Name	Description	Data Origin
pathway_groups.tsv	Maps IDs grouped by KEGG sub-categories	Extracted from KEGG pathway database

## Installation

### Install PANKEGG

Installing Pankegg is simple. You can either download the repository as a zip file, or clone it using git.

#### Download via wget or curl

You can download the repository as a zip file with **wget**:

```
wget https://github.com/RVanDamme/PANKEGG/archive/refs/heads/master.zip
unzip master.zip
cd PANKEGG-master
```

Or with **curl**:

```
curl -L https://github.com/RVanDamme/PANKEGG/archive/refs/heads/master.zip -o master.zip
unzip master.zip
cd PANKEGG-master
```

**OR**

#### Clone via git

Alternatively, you can clone the repository directly using git:

```
git clone https://github.com/RVanDamme/PANKEGG.git
cd PANKEGG
```

### Install dependencies

You can install Pankegg and all necessary dependencies via **conda**, **pip**, or **pixi**.

## Using conda

For a stable installation, use `conda-lock` to create and activate a stable conda environment using the provided `conda-lock.yml` file (found in the `conda.recipe` directory):

```
conda-lock install --name pankegg_env conda-lock.yml
conda activate pankegg_env
```

Alternatively, create and activate a new conda environment using the provided `environment.yml` file (found in the `conda.recipe` directory):

```
conda env create -f environment.yml
conda activate pankegg_env
```

## Using pip

From within the repository folder, install all dependencies by running:

```
pip install .
```

Or, install dependencies only:

```
pip install flask pandas numpy scikit-learn scipy jinja2 click setuptools importlib-metadata
```

## Using pixi

If you use `pixi`, you can use the `pixi.lock` and run all the Pankegg commands with:

```
pixi run <pankegg_command>
```

Substitute `<pankegg_command>` with the command you want to run.

## Windows Subsystem for Linux

If you are using WSL, you should install Pankegg in the WSL itself and **NOT on your Windows drive**. This is required because of the disparity between the Linux FileSystem and the Windows FileSystem, which prevents the tools from running correctly through WSL when installed in the Windows FS.

We also recommend storing your database in the WSL rather than on your Windows drive. While this is not critical, it is a better practice and ensures that Pankegg will read the database properly.

Once the installation is complete, you can run Pankegg using:

```
pankegg_make_db --help
pankegg_app --help
```

If the commands are not in your PATH then use the whole path to the executable.

For more detailed instructions on how to use Pankegg, see the Usage and Tests section.

## The tools

Pankegg is composed of two main tools:

- **Pankegg Make DB**, the data parser and SQL database creator ([Pankegg\\_make\\_db.py](#)), which processes a CSV file where each line lists the required input files for a single sample. It compiles the information from these files into a structured SQL database, making downstream exploration fast and efficient, and
- **Pankegg APP**, the web server for interactive data exploration ([Pankegg\\_app.py](#)), which uses the database generated by the parser and provides an interactive browser-based interface to explore your results.

The web interface is divided into two main categories:

- **Navigation and Search:** Effortlessly browse and filter all available data to find exactly what you need.
- **Features:** Visualize data, compare bins or samples, and generate insightful plots.

## Navigation and Search Pages



Table 3: Navigation and Search Pages

Page Name	Usage	Possible Filters
Bins	Visualize all bins for each sample, review CheckM2 quality and classifications. Generate quality plots, see maps/KEGGs for bins.	Sample Name, Bin Name, Taxonomy, Maps, KEGGs
Maps	Visualize all pathways detected in your data, check pathway “completeness”, highlight orthologs present per pathway.	Sample Name, Bin Name, Taxonomy, Map (ID/Name), KEGGs
KEGGs	List all KEGGs present globally or in a specific bin; find patterns in ortholog/bin names.	Ortholog Name Pattern, Bin Name (via Bins page)
Taxonomy	View tables for each taxonomic rank, listing taxa found and their abundance.	Taxonomic Rank

## Feature Pages

Pankegg provides multiple interactive features:

- **Sample vs Sample:** Heatmap of selected pathways, scatter plots for bin quality, PCA of bins, tables/plots showing KEGGs unique or shared between samples/pathways.
- **Bin vs Bin:** Plot and table of KEGGs shared or unique between two bins for metabolic pathways.
- **Taxonomic Comparison:** For a given rank, see sample-wise composition plots (abundance = number of bins classified as taxon / total bins), and pathway-vs-taxa heatmaps.
- **PCA:** Dedicated page for visualizing principal component analysis (PCA) of each sample, based on KOs, maps, or taxonomy.

### Note:

In this documentation, the terms “map” and “pathway” are sometimes used interchangeably. Typically, “map” refers to the KEGG database’s map ID (e.g., map00010), while “pathway” refers to the biological pathway name. Although the KEGG database provides both a pathway ID and a map ID, this tool focuses on the map ID, which is generally more complete and reliable for referencing metabolic pathways.

Pankegg’s data parser that constructs the SQL database that is later used in the web application.

## Input file format

To create the SQL database, you will need a CSV file listing all your samples and their corresponding input directories or files.

The expected CSV format uses the following header:

```
Sample name,Annotation_dir,classification_dir,Checkm2_dir
```

Each subsequent line represents a sample, and should look like one of the following examples:

- For Sourmash classification:

```
SAMPLE1,/Path/to/SAMPLE1/bin_annotation/*.annotations.tsv,/Path/to/SAMPLE1/sourmash/*,/P
SAMPLE2,/Path/to/SAMPLE2/bin_annotation/*.annotations.tsv,/Path/to/SAMPLE2/sourmash/*,/P
```

- For GTDB-TK classification (when using the `--gtdbtk` flag):

```
SAMPLE1,/Path/to/SAMPLE1/bin_annotation/*.annotations.tsv,/Path/to/SAMPLE1/gtdb_results/
SAMPLE2,/Path/to/SAMPLE2/bin_annotation/*.annotations.tsv,/Path/to/SAMPLE2/gtdb_results/
```

## Create the input file

You can create this input CSV file automatically with a bash loop, depending on how your data are organized:

### If your results are grouped by sample:

```
Dir/
  SAMPLEID1/
    bin_annotation/
    sourmash/
    gtdb_results/
    checkm2_dir/
  SAMPLEID2/
    bin_annotation/
    sourmash/
    gtdb_results/
    checkm2_dir/
```

Run the following script to include Sourmash annotation:

```

echo "Sample name,Annotation_dir,classification_dir,Checkm2_dir" > samples.csv
for sample in Dir/*; do
    name=$(basename "$sample");
    ann_path="$sample/bin_annotation/*.annotations.tsv";
    class_path="$sample/sourmash/*";
    checkm2_path="$sample/checkm2_dir/quality_report.tsv";
    echo "$name,$ann_path,$class_path,$checkm2_path" >> samples.csv;
done

```

Run the following script to include GTDBTK annotation:

```

echo "Sample name,Annotation_dir,classification_dir,Checkm2_dir" > samples.csv
for sample in Dir/*; do
    name=$(basename "$sample");
    ann_path="$sample/bin_annotation/*.annotations.tsv";
    class_path="$sample/gtdb_results/*.summary.tsv";
    checkm2_path="$sample/checkm2_dir/quality_report.tsv";
    echo "$name,$ann_path,$class_path,$checkm2_path" >> samples.csv;
done

```

**If your results are grouped by tool, then sample:**

```

Dir/
  bin_annotation/
    SAMPLEID1/
    SAMPLEID2/
    ...
  sourmash/
    SAMPLEID1/
    SAMPLEID2/
    ...
  gtdb_results/
    SAMPLEID1/
    SAMPLEID2/
    ...
  checkm2_dir/
    SAMPLEID1/
    SAMPLEID2/
    ...

```

Run the following script to include Sourmash annotation:

```

echo "Sample name,Annotation_dir,classification_dir,Checkm2_dir" > samples.csv
for sample in Dir/bin_annotation/*; do
    name=$(basename "$sample");
    ann_path="Dir/bin_annotation/$name/*.annotations.tsv";
    class_path="Dir/sourmash/$name/*";
    checkm2_path="Dir/checkm2_dir/$name/quality_report.tsv";
    echo "$name,$ann_path,$class_path,$checkm2_path" >> samples.csv;
done

```

Run the following script to include GTDBTK annotation:

```

echo "Sample name,Annotation_dir,classification_dir,Checkm2_dir" > samples.csv
for sample in Dir/bin_annotation/*; do
    name=$(basename "$sample");
    ann_path="Dir/bin_annotation/$name/*.annotations.tsv";
    class_path="Dir/gtdb_results/$name/*.summary.tsv";
    checkm2_path="Dir/checkm2_dir/$name/quality_report.tsv";
    echo "$name,$ann_path,$class_path,$checkm2_path" >> samples.csv;
done

```

## Parameters Make DB

- **-i, --input**  
Path to the CSV file listing all samples and their input files/directories (required).
- **-o, --output**  
Name of the output database file (**without the extension**). The default is **pankegg**. The **.db** extension is automatically added to the output name.
- **--output\_dir**  
Directory the database will be written to. The default is **./db\_output**.
- **--gtdbtk**  
Use this flag if your classification files were generated with GTDB-TK instead of Sourmash.

## Output Make DB

The output is an SQLite database (\*.db) that can be opened with tools like **sqlite3**, but is best used with **pankegg\_app.py** for interactive browsing.

The database contains the following tables:

- taxonomy
- bin
- map
- kegg
- bin\_map\_kegg
- bin\_map
- map\_kegg
- bin\_extra
- bin\_extra\_kegg
- sample

Each table stores specific information related to bins, pathways, taxonomy, and annotation results for easy querying and visualization.

## Run with Testdata

To verify your installation and familiarize yourself with Pankegg, you can run a test using provided data. Download the example archive, unzip it, and generate test databases using the included CSV files:

**Download the test data archive from [OSF](https://osf.io/download/5v3zc/):**

```
wget https://osf.io/download/5v3zc/ -O pankegg_test_data.zip
```

OR

```
curl -L -o pankegg_test_data.zip https://osf.io/download/5v3zc/
```

**Unzip the archive:**

This will create a directory called `pankegg_test_data`.

```
unzip pankegg_test_data.zip
```

**Create a test database for Sourmash classification:**

```
python pankegg_make_db.py -i pankegg_test_data/sourmash_example.csv -o test_sourmash --output_dir
```

### Create a test database for GTDB-TK classification:

```
python pankegg_make_db.py -i pankegg_test_data/gtdbtk_example.csv -o test_gtdbtk --output_dir
```

After running these commands, you should find newly created `test_sourmash.db` and `test_gtdbtk.db` inside the `pankegg_test_data` directory. This is in addition to the already existing `sourmash_example.db` and `gtdbtk_example.db` files in the same directory.

The existing and newly generated respective databases should be identical, so the validity of `pankegg_make_db.py` can be tested by comparing the two files.

## Troubleshooting

For more details or troubleshooting, please consult the [Reporting Bugs & Contributing](#) section.

Pankegg's web server for interactive data exploration.

## Input file

`Pankegg_app.py` is using the output of `pankegg_make_db.py`.

## Usage APP

To start the Pankegg web server with your database, use the following command (replace with your actual database path):

```
python /path/to/pankegg_app.py --d /Path/to/YOUR_PANKEGG.db
```

(Replace `/path/to/pankegg_app.py` and `/Path/to/YOUR_PANKEGG.db` with your actual paths.)

**Note:**

Before running the web application, it is highly recommended to **change the `app.secret_key`** (located around line 24 in `pankegg_app.py`) to a secure value of your choice. This key is used by Flask for session security. Leaving it as the default ('local') is fine for local or testing use, but for any real-world or multi-user deployment, you should generate and use a strong, unique secret key to prevent session tampering and increase security.

**Parameters APP**

- `--d` or `--db`  
Path to the SQLite database you want to browse.  
Example: `--d /Path/to/YOUR_PANKEGG.db`
- `--help`  
Display a help message with all available options.

**Output APP**

By default, the web server will start on your local IP address (host 0.0.0.0) and port 5000. Once started, you can access the Pankegg interface in your browser by navigating to:

<http://0.0.0.0:5000>

You will be able to browse, filter, and visualize all results contained in your selected database.

**Run with Testdata**

You can test the web interface using either the database provided with the repository, example databases from the test data, or your own generated databases.

Here are example commands (replace BASH with the actual commands):

- To run the app on the database shipped with the GitHub repository (`data/pankegg.db`):

```
python pankegg_app.py --d data/pankegg.db
```

- To run the app on the example Sourmash test database (`pankegg_test_data/sourmash_example.db`):

```
python pankegg_app.py --d pankegg_test_data/sourmash_example.db
```

- To run the app on the example GTDB-TK test database (`pankegg_test_data/gtdbtk_example.db`):

```
python pankegg_app.py --d pankegg_test_data/gtdbtk_example.db
```

- To run the app on the Sourmash database you created during the test (pankegg\_test\_data/test\_sourmash.db)

```
python pankegg_app.py --d pankegg_test_data/test_sourmash.db
```

- To run the app on the GTDB-TK database you created during the test (pankegg\_test\_data/test\_gtdbtk.db)

```
python pankegg_app.py --d pankegg_test_data/test_gtdbtk.db
```

## Troubleshooting

For more details or troubleshooting, please consult the [Reporting Bugs & Contributing](#) section.

## Web Interface

This is an overview of all the web app pages:

### Home

At the top, a navigation bar provides quick access to all major sections: Home, Bin, Map, Kegg, Taxonomy, and Visualisation. Each of these sections links to a page where you can browse detailed information about your bins, pathway maps, KEGG identifiers, and taxonomic classifications, or use the different interactive visualisation tools. The navbar ensures that you can switch between functional modules.

The landing page, **Home**, links to all elements that are also present in the navigation bar, and provides a short description for each one. Additionally, it shows the full content of the **Visualisation** page, Sample VS Sample; Bin VS Bin; Taxonomy comparison; PCA, and briefly describes each one.





Figure 1: Figure: Home Page Example

## Bin


The **Bin** information page allows you to view and manage all bins in your project, organized by sample. At the top, you will find options to toggle **the visibility** of all bins or all **taxonomy classifications** with a single click.

A panel provides advanced **sorting, search, and filtering** options: - **Sort by** Bin Name, Completeness, or Contamination. - **Filter/search** by sample name, bin name, or any taxonomic rank (Kingdom, Phylum, Class, Order, Family, Genus, Species). By default the search is on the sample name and bin name, for filtering by taxonomic rank select one or more before searching. - **GTDB quality filtering** can be enabled to display only the bins passing Genome Taxonomy DataBase selection criteria (completeness -  $5 \times \text{contamination} > 50$ ).

Each bin is displayed in a table below its Sample Name, with columns for bin name, genus, species, completeness, and contamination.

For each bin, you can: - **View associated maps (pathways)** or **KEGG orthologs** with a single click. - **Toggle taxonomy classification** to expand or collapse the display of detailed taxonomic information. - **Generate a quality plot** for the bins in a sample.

These features make it easy to explore, filter, and compare bin quality and taxonomy across all your samples.

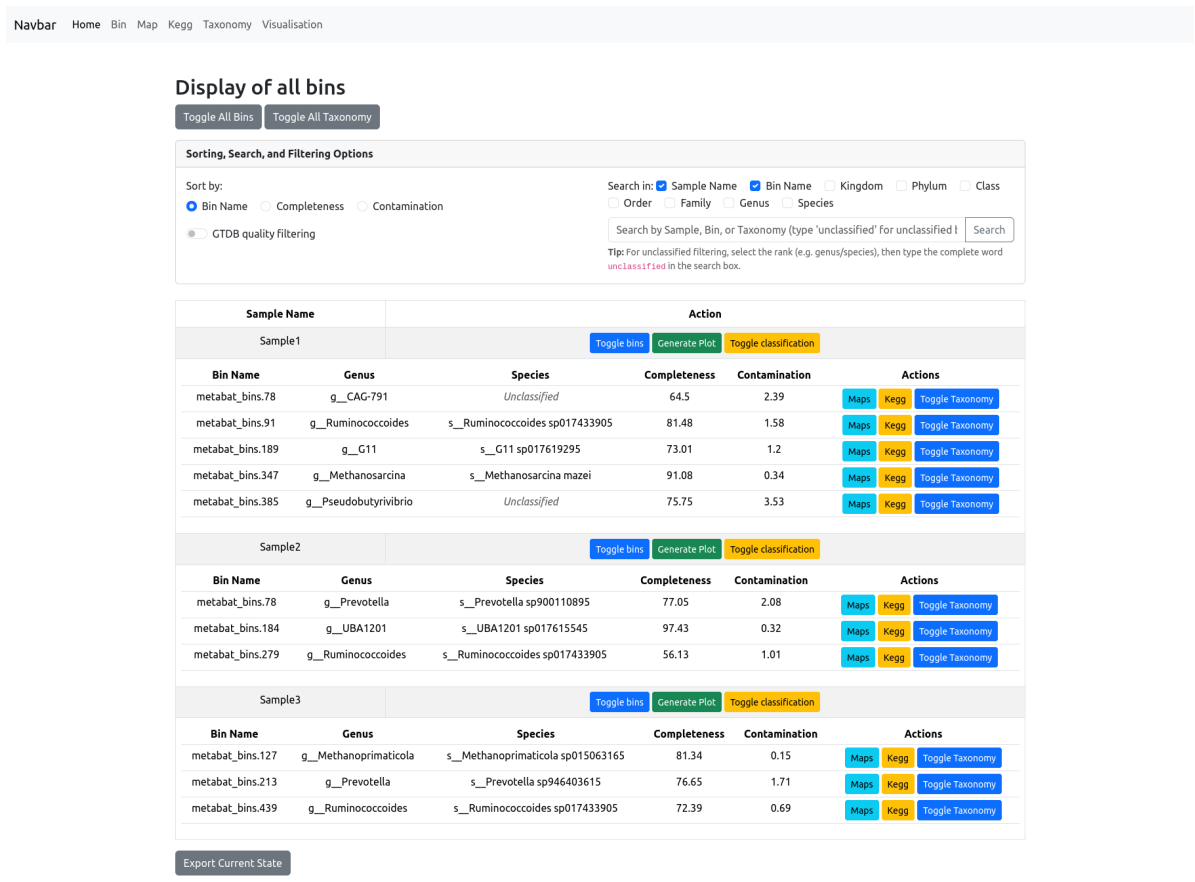

## Filtering and Search

You can filter maps by sample, bin, pathway name, or KO identifier using the controls above the table. When filtering by bin or sample, the pathway completion percentage is recalculated to only include the KOs found within the selected bin(s) or sample(s), providing a focused view of its metabolic potential.

## Viewing KO Details

For each pathway, you can toggle the display of all detected KO IDs. This expands the row to show the full list of associated KEGG orthologs, with coloring based on their official status in the pathway.

If you filter through KO IDS, the filtered KO will be highlighted in orange to differentiate it from all the other KO IDs.

NavbarHomeBinMapKeggTaxonomyVisualisation

Maps associated with search: Sample1Sample3metabolic

Toggle All Details

Export Current State

Legend:

KEGG ID officially present in the pathway (Dark Blue)

KEGG ID not officially present in the pathway (Light Blue)

About Pathway Completion: The pathway completion percentage is calculated by counting the number of KEGG orthologs (KOs) detected in the selected bin(s) that are associated with this pathway in KEGG. The percentage shown is **number of detected KOs / total theoretical KOs** for this pathway.  
Note: Not all orthologs contribute equally to pathway functionality—this value is only an approximate indicator. For detailed insight, use the "Highlight pathway" button to copy detected KOs and visualize them by clicking on the go to KEGG button or for a more detailed search use the [KEGG's Color tool](#).

Sample

Sample1Sample3

Type to add sample...

Bin

metabolic

Filter by KO ID

Filter

Clear

Map Number	Pathway Name	Pathway completion	Action
map01100	Metabolic pathways	<div>15.43%</div>	<div><div>View Bins</div><div>Toggle ko_ids</div><div>KEGG info</div><div>Highlight pathways</div></div>

Associated KEGG IDs:

menF, K02552 : menF, K01611 : speD, AMD1, K13038 : coaBC, dfp, K01494 : dcd, K01465 : URA4, pyrC, K19244 : ala, K00548 : meth, MTR, K00930 : argB, K03046 : rpoC, K01809 : manA, MPI, K02529 : galR, K01572 : null, K00012 : UGDH, ugd, K03738 : aor, K01755 : argH, ASL, K01466 : allB, K12373 : HEXA\_B, K02121 : ATPVE, ntpE, atpE, K00335 : nuoF, K01007 : pps, ppsA, K13831 : hps-phi, K02232 : cobQ, cbp, K01464 : DPYS, dht, hydA, K21071 : pfk, pfp, K05936 : cobM, cbf, K02342 : dnaQ, K00954 : E2.7.7.3A, coaD, kdtB, K00241 : sdhC, frdC, K03394 : cobI-cbl, K00677 : lpxA, K00826 : E2.6.1.42, ilvE, K00656 : E2.3.1.54, pfid, K03044 : rpoB1, K01941 : E6.3.4.6, K01183 : E3.2.1.14, K00800 : aroA, K01695 : trpA, K00202 : fwdC, fmdC, K00528 : fpr, K01689 : ENO1\_2\_3, eno, K20453 : dmdB, K10907 : K10907, K03785 : aroD, K01749 : hemC, HMBS, K01760 : metC, K21636 : nrdD, K00045 : E1.1.1.67, mtLK, K16306 : K16306, K14155 : patB, malY, K01919 : gshA, K16792 : aksD, K00703 : glgA, K05830 : lysJ, argD, K03750 : moeA, K03059 : rpoP, K21219 : thiDN, K00443 : frhG, K00549 : metE, K20452 : dmdA, K01181 : E3.2.1.8, xynA, K11755 : hisIE, K05829 : lysY, argC, K03465 : thyX, thy1, K02822 :

Figure 3: Figure: Map Information Page

## KEGG Info and Pathway Highlighting

The “KEGG info” button provides a direct link to the pathway’s entry on the KEGG website for further reference.

19

The “Highlight pathways” button opens a sidebar slider with all relevant KO IDs for the selected pathway. You can quickly copy these IDs and use them in the KEGG color tool to generate a custom view of the pathway map on the KEGG website. The KOs found in your current data will then be highlighted with color.

This combination of interactive filtering, KO details, and external links makes it easy to explore pathway presence, completion, and functional highlights across all your bins and samples.



Figure 4: Figure: Map Information Page

For examples the (Carbon Metabolism pathway)[<https://www.kegg.jp/pathway/map01200>] for Sample 1 and 3 of the test data contains:

Option

Scale: 100%

Link: Normal

Search

[D0615 K00399 K1401] Go

K00863 DAK  
K00625 pta  
K00261 GLUD1\_2  
K01677 E4.2.1.2AA  
K00577 mtrA  
K00194 ctdH  
K03738 sor  
K01624 FBA  
K00174 korA  
K01754 E4.3.1.19  
K01738 cykK  
K01007 pps  
K13831 hps-phl  
K13788 pta  
K03390 hsdC2  
K00176 korD  
K01938 fhs  
K00918 ptkC  
K03389 hsdR2  
K00241 sdcH  
K22481 hsdR1  
K01834 PGAM  
K13812 fse-hps  
K00240 sdcB  
K00202 fwcD  
K01689 ENO1\_2\_3  
K00402 mcrG  
K00851 hnkK  
K01610 hsdA  
K01676 E4.2.1.2A  
K00195 ctdH  
K00320 mer  
K04480 mtaB  
K16306 K16306  
K01962 accA  
K11261 fwcE

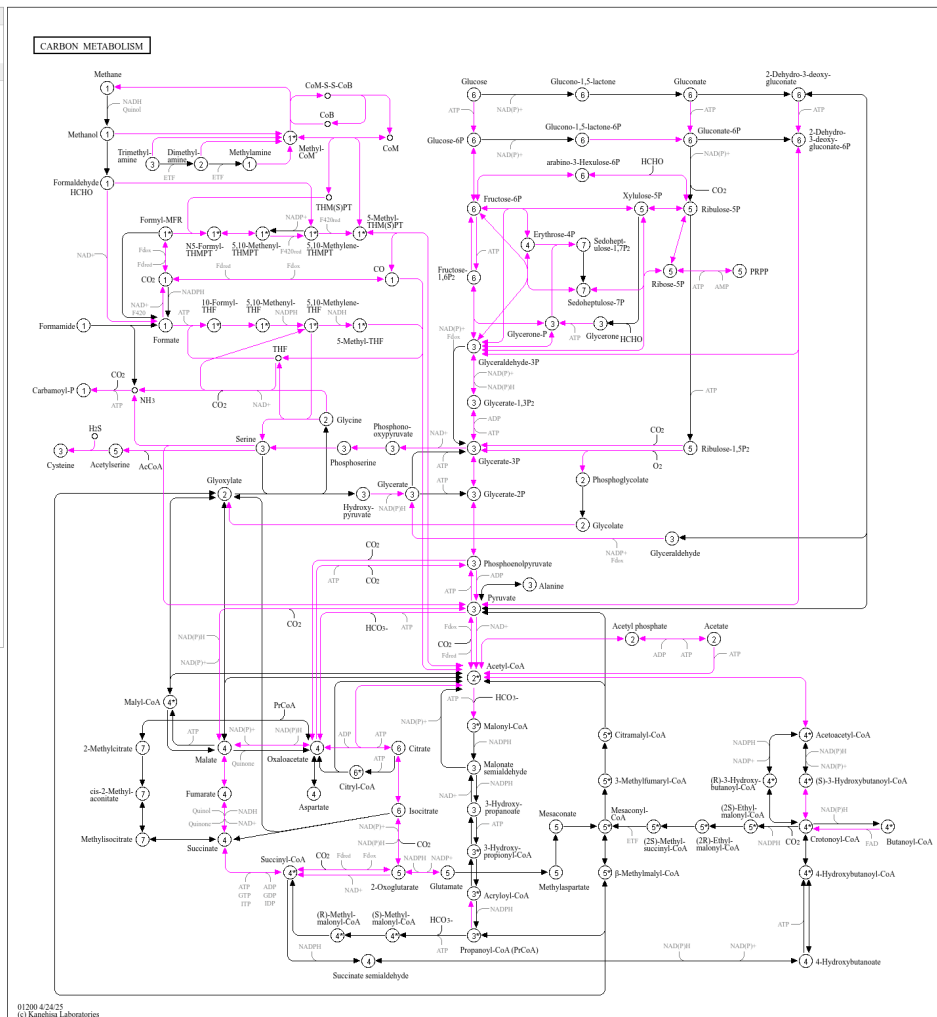


Figure 5: Figure: Map Information Page

## KEGG

The KEGG page provides an overview of all KEGG orthologs (KO IDs) detected in your dataset. The main table displays, for each KEGG ortholog (KO), its ID, KO name, and a full name/description. You can use the search bar at the top to filter the KEGG IDs.

You see the complete list of KOs across your entire project, with quick-access buttons to:

- **View Bins:** Show which bins contain the selected KO.
- **View Maps:** See which metabolic pathways (maps) include the selected KO.

- **View Details:** Expand to show detailed information for each bin and sample in which the KO is present, including associated GO terms and EggNOG annotations, if available.
- **KEGG info:** Open the corresponding KO entry on the KEGG website for more detailed biological context.

When you apply filters on the **Bin** page, the KEGG Identifiers view will display only those KOs present in the selected bin, helping you focus on its functional profile.

Beware that when viewing the details of KOs you can have multiple entries within the same bin as we parse the entire EggNOG annotation file and those files can be redundant.

All action buttons are designed for seamless exploration: filter bins and maps based on any KO of interest, or instantly jump to its external reference.

Navbar
Home
Bin
Map
Kegg
Taxonomy
Visualisation

Display of all KEGG IDs

Toggle All Details

Search by pattern

Search

KO ID	KO Name	Full Name	Action	
K00759	APRT, apt	adenine phosphoribosyltransferase [EC:2.4.2.7]	View Bins	View Maps
			View Details	KEGG info
Bin Name	Sample	GO-terms	KO associated in EggNOG annotation	EggNOG Description
metabat_bins.189	Sample1	-	ko:K00759	—
metabat_bins.91	Sample1	-	ko:K00759	—
metabat_bins.347	Sample1	-	ko:K00759	—
metabat_bins.78	Sample2	-	ko:K00759	—
metabat_bins.279	Sample2	-	ko:K00759	—
metabat_bins.184	Sample2	-	ko:K00759	—
metabat_bins.439	Sample3	-	ko:K00759	—
metabat_bins.213	Sample3	-	ko:K00759	—
metabat_bins.127	Sample3	-	ko:K00759	—
K00202	hwdC, fmdC	formylmethanofuran dehydrogenase subunit C [EC:1.2.7.12]	View Bins	View Maps
			View Details	KEGG info
K00595	cobL-cbiET	precorrin-6B C5,15-methyltransferase / cobalt-precorrin-6B C5,C15-methyltransferase [EC:2.1.1.132 2.1.1.289 2.1.1.196]	View Bins	View Maps
			View Details	KEGG info
K00002	AKR1A1, adh	alcohol dehydrogenase (NADP+) [EC:1.1.1.2]	View Bins	View Maps

Figure 6: Figure: KEGG Identifiers Page

## Taxonomy

The Taxonomy page allows you to explore the taxonomic composition of your dataset at any rank (such as phylum, class, order, etc.) by simply selecting the desired taxonomic level from the dropdown menu at the top of the page. The resulting table lists all taxa detected at that rank, alongside the number of bins classified under each taxon.

The “unclassified” taxa are qualified in this table as their rank letter followed by 2 underscore (e.g. S\_\_).

For each taxon, you have quick access buttons to:

- View only the **bins** classified as this taxon,
- See the **maps** (metabolic pathways) found in those bins,
- Browse the **KEGG orthologs** associated with this taxon.

This makes it easy to drill down into the taxonomic groups of interest and immediately access qualitative and pathway-related information for any selected group.

Navbar Home Bin Map Kegg Taxonomy Visualisation

Taxonomy level: species

Species

Name	Bins Associated	Actions
S__	2	<a href="#">Bins</a> <a href="#">Maps</a> <a href="#">Kegg</a>
S_g11 sp017619295	1	<a href="#">Bins</a> <a href="#">Maps</a> <a href="#">Kegg</a>
S__methanoprismaticola sp015063165	1	<a href="#">Bins</a> <a href="#">Maps</a> <a href="#">Kegg</a>
S__methanosarcina mazei	1	<a href="#">Bins</a> <a href="#">Maps</a> <a href="#">Kegg</a>
S__prevotella sp900110895	1	<a href="#">Bins</a> <a href="#">Maps</a> <a href="#">Kegg</a>
S__prevotella sp946403615	1	<a href="#">Bins</a> <a href="#">Maps</a> <a href="#">Kegg</a>
S__ruminococcoides sp017433905	3	<a href="#">Bins</a> <a href="#">Maps</a> <a href="#">Kegg</a>
S__uba1201 sp017615545	1	<a href="#">Bins</a> <a href="#">Maps</a> <a href="#">Kegg</a>

Figure 7: Figure: Taxonomy Page

## Sample vs Sample

The Sample vs Sample page enables detailed comparison between any two selected samples in your dataset.

To begin, choose two samples from the dropdown menus. The page then displays a suite of visualizations and tables to help you interpret differences and similarities:

- **Heatmap:**

Select a pathway category to visualize completion levels for each bin and each pathway in both samples. Pathway completion is shown as a heatmap—bins with more complete pathways are colored closer to red, while less complete pathways are closer to blue. You can also select multiple pathway categories. Each category is plotted individually and displayed underneath each other. *Note: Completion is calculated as the proportion of orthologs detected in each bin out of the total number required for the pathway.*

- **Scatterplot:**

The bin quality scatterplot shows, for each sample, the completeness versus contamination for all bins, allowing quick assessment of bin quality distribution within and between samples.

- **Bin PCA:**

PCA (Principal Component Analysis) plots are generated for all bins in each sample, displaying the distribution of bins in reduced dimensionality space. This highlights similarities or differences in bin composition and functional potential. *Note: This should only be used if there are sufficient amount of bins provided, a PCA on e.g. 3 bins has no value*

- **Common Pathways:**

A table lists all detected pathways, with counts of shared and unique orthologs for each sample. You can filter pathways using the search bar. Below, a barplot provides a visual summary of these counts, making it easy to spot pathways enriched or unique to each sample.

These combined tools offer a comprehensive, multi-angle comparison of the functional and taxonomic profiles of your samples.



### Sample vs Sample Comparison

Select Sample 1:  Select Sample 2:



Figure 8: Figure: Sample vs Sample Page

## Bin vs Bin

The Bin vs Bin comparison page allows you to directly compare the metabolic potential of any two bins, whether they belong to the same sample or to different samples. After selecting two bins, the page displays a table listing all metabolic pathways, showing the count of orthologs detected in both bins, or uniquely in each bin. You can use the search bar to filter pathways of interest.

Below the table, a barplot visually summarizes these pathway counts, making it easy to identify pathways that are shared or unique to each bin.

This focused comparison makes it simple to explore functional similarities and differences between any two specific genome bins in your dataset.



Figure 9: Figure: Bin vs Bin Page

## Taxonomy Comparison

The Taxonomy Comparison page allows you to compare the taxonomic composition and metabolic potential of your samples at any chosen rank (such as phylum, class, or order). After selecting a rank, a barplot displays the percentage of bins belonging to each taxon across all samples. *Note: The percentages are calculated as the number of bins for each taxon divided by the total number of bins in each sample.*

Below, a heatmap visualizes the number of bins present at specific metabolic pathways for each taxon at the selected rank. Pathways (rows) are compared against taxonomic groups (columns), with color indicating the number of bins: red signifies higher number of bins, while blue indicates lower number of bins.

These combined visualizations help you to quickly assess both the taxonomic structure and functional diversity present in your data.

## Sample Taxonomy Comparison

Select Taxonomic Rank:

Species



Figure 10: Figure: Taxonomy Comparison Page

## PCA

The PCA page provides Principal Component Analysis (PCA) visualizations to help you explore the global structure and relationships in your dataset. You can choose to perform PCA:

- **Based on KOs:** The samples are differentiated by their KEGG Orthologs.
- **Based on Maps:** The samples are differentiated by their metabolic pathways (maps).
- **Based on Taxonomy:** The samples are differentiated by their taxonomic composition based on the specified rank (such as phylum, class, order, etc.).

The resulting PCA plot visualizes your samples in a reduced dimensional space, helping to highlight patterns, clusters, or differences driven by functional or taxonomic profiles. The explained variance for the principal components is displayed below the plot to indicate how much of the data's variation is captured. *Note: We recommend using this tool only if you have enough samples.*



Figure 11: Figure: PCA Page

## Additional Information

### Reporting Bugs & Contributing

Contributions from the community are welcome ! See the [Contributing guidelines](#)

---

## **AI and LLM**

AI/LLM were used as “writing buddy” during the redaction of the README.md (e.g. ensuring a readable markdown structure and correcting the syntax/grammar). The logic and code were initially made by humans (@RVanDamme and @Avanbelle), before using AI/LLM on the code to debug and refactor it.