Kala Chakra project • Astro_Fork

How Parashara's Light 7 Casts a Chart

A reverse-engineering study of its calculation engine, and how it differs from Kala Chakra 1.5

Prepared for:	Amrit Mohapatra
Date:	17 October 2026
Target:	`PL7.exe` 7.0 (2006), SHA-256 `e530a346...35f9`
Compared with:	Kala Chakra v1.5 / KAAST Caster v1.5

Every finding is graded by the kind of evidence behind it (subsection 1.3).

Contents

Summary 2

1 What was examined, and how 2

2 The chart-casting engine of Parashara's Light 7 3

3 The transit viewer and its cache 6

4 Divisional charts (vargas) 8

5 Bhava chalit (the Bhava chart) 9

6 Yogi, Avayogi and Duplicate Yogi 10

7 Dashas 10

8 The KP section: calculation and display 11

9 Jaimini: karakas, padas and special lagnas 11

10 Guna matching (compatibility) 12

11 The planetary "summariser" table 13

12 Side by side: PL7 and Kala Chakra 1.5 13

13 Tests you can run in PL7 yourself 14

14 Limitations 14

AI Tool Declaration 15

References 15

A Key addresses in `PL7.exe` 15

B Citation provenance 16

Summary

Parashara's Light 7 (PL7) casts charts with its *own* 2006 ephemeris, not the Swiss Ephemeris. Its default ayanamsa is a Lahiri polynomial that agrees with the Swiss Ephemeris Lahiri, and therefore with Kala Chakra, to about one arcsecond. Rahu is the true node, and longitudes are referred to the mean equinox, as in Kala Chakra.

The main methodological difference is the houses. PL7 computes **Placidus** cusps (so your father was right) from the geographic latitude, whereas Kala Chakra computes **Topocentric** cusps from the geocentric latitude to match Solar Fire. At Singapore the two agree to about $10''$; at Lapanga the ascendant axis differs by up to about $4'$. PL7 also offers two KP ayanamsas that Kala Chakra does not. "Krishnamurti New" is Lahiri minus $6'05''$, which by itself changes the sub lord of about 7 % of positions.

Two findings matter in practice:

1. **The transit viewer in this installation is inaccurate for the planets.** Its cached positions of the Sun, Mercury, Venus, Mars, Jupiter and Saturn are displaced by almost exactly one Moon-distance of parallax, up to about $10'$. The cause is a run-time factor in the Earth–Moon reduction that most probably depends on the program's licence state. The Moon, Rahu, cusps and dashas are unaffected, which is why the dasha dates still matched Kala Chakra. The natal planets very probably carry the same error; a two-minute test is given in section 13.

2. **The dasha "365.25-day" option actually uses 365.2421875-day years.** This is invisible in horary work but shifts natal dasha boundaries by hours after a few decades.

PL7 is far broader than Kala Chakra: 31 varga variants, at least 20 dasha systems, Jaimini padas and karakas, Yogi points, Guna matching and an animated transit viewer. For KP horary, Kala Chakra is deeper and, for this copy, more accurate. Table 4 sets the two side by side.

1 What was examined, and how

1.1 Material

The analysis used the PL7 installation copied to `Astro_Fork/GeoVision/PL7` (executable, data files, help and tutorial files, the 239-page manual `PL70.pdf` and `New features in PL7.pdf`), together with the saved charts (`GeoVisionCharts`) and option files (`GeoVisionOptions`). The saved charts turned out to hold only birth data (a Julian Day, longitude, latitude and time zone), not computed positions. The transit cache in `PL7/Temp` (436 monthly files) did hold computed positions, and it became the numerical ground truth for PL7's engine. Nothing was executed: there is no Windows runtime on this Mac, and the study is entirely static.

1.2 Tools

Static binary analysis used REA 6.5.0 (morluto 2026) through its command-line interface (`npx rea-agents execute-rizin-command`), with Rizin as the analysis engine (installed with Homebrew; no decompiler plugin). REA was not registered as an MCP server, so no Claude configuration was changed. Each REA call returns an evidence record with the SHA-256 of the target and the exact Rizin command; the 25 records are archived in `evidence/rea_rizin/` with an index. Numerical checks used the Swiss Ephemeris 2.10.03 (`pyswisseph`) with the same `_18` data files as Kala Chakra's Python engine. All scripts are in `scripts/`; the two figures are regenerated by `scripts/make_figures.py`. A separate pass read the whole manual, the New-features PDF and the program's help and tutorial files. Those text files are lightly obfuscated with a byte-shift cipher and were decoded for reading.

1.3 Evidence grades

[BIN] Read directly from the machine code or data tables of `PL7.exe` (function addresses given).

[NUM] Measured by comparing PL7's own computed output (the transit cache) with the Swiss Ephemeris.

[DOC] Stated in PL7's documentation (manual page, help or tutorial file). Describes intent, not necessarily the code.

[INF] Inference from the above; plausible but not proven.

In plain words. About the word "61": PL7 stores English resources with the suffix 1 (`Lang1`, `Extras1`, `Pic1`) and Hindi resources with the suffix 61 (`Lang61`, `Extras61`, `Pic61`); the decoded `Lang61` text is Devanagari in a legacy 8-bit font encoding. The "61" you see is therefore the Hindi language set, not a separate calculation mode **[INF]**.

2 The chart-casting engine of Parashara's Light 7

This section answers the central question: *how does PL7 cast a chart?* Every statement is graded **[BIN]**, **[NUM]**, **[DOC]** or **[INF]** as defined in subsection 1.3. The software analysed is `PL7.exe`, a 32-bit Windows executable linked on 1 August 2006 with the Microsoft Visual C++ 6 linker against Qt 3.3.6 (`qt-mt336.dll`); its SHA-256 is `e530a346...35f9`.

2.1 Ephemeris source and valid date range

PL7 does *not* use the Swiss Ephemeris. It reads its own data files from `Bin/`: `ephemdat.bin` (1.7 MB), `topos1.dat`, `topos2.dat`, `Topos3.dat` and `Topos.ndx` (planetary series), `approx.dat` and `JUNCTION.DAT`. The start-up routine prints "initialising ephemeris..." and aborts with "File missing: topos1.dat or topos2.dat" if the series are absent; the reader routine (`fcn.0055de40`) rejects dates outside the file's range with "Invalid date for ephemeris" and labels its internal frame `EQU2000`, i.e. the series are stored as J2000 equatorial coordinates and rotated to the ecliptic of date **[BIN]**.

The transit cache (section 3) gives an external check of this range. Moon and Rahu positions agree with the Swiss Ephemeris to better than one arcsecond for every cached month from January 2020 to December 2048, and become wrong by up to $\pm 5000''$ from 1 January 2049 onwards **[NUM]**. The precise ephemeris therefore ends with the year 2048; after that PL7 silently falls back to a coarse approximation (the code references `approx.dat` with the messages "error loading approx.dat" and "could not read approx.dat completely") **[INF]**. The lower bound is held in the data file rather than in the executable and was not determined.

Pitfall. A horary or muhurta chart in PL7 for a date in 2049 or later is computed from the fallback approximation, and the program gives no warning. Kala Chakra's Swiss Ephemeris files cover 1800–2399, so the two programs will disagree by arcminutes for such dates, and PL7 is the one in error.

2.2 Delta-T (the TT−UT correction)

PL7 ships `Bin/DELTAT.ASC`, a half-yearly table of ΔT from 1800.0 (12.578 s) to 1993.0 (59.122 s), dated March 1993 **[BIN]**. For later dates it must extrapolate. Fitting the Moon in the transit cache (the Moon moves $0.55''$ per second of time, so a ΔT error shows up as a pure lunar offset) gives PL7's effective ΔT as 83.0 s in January 2020, rising linearly at 0.89 s yr^{-1} to 108.8 s at the end of 2048 **[NUM]** (Figure 1). The true value has stayed near 69 s since 2020.

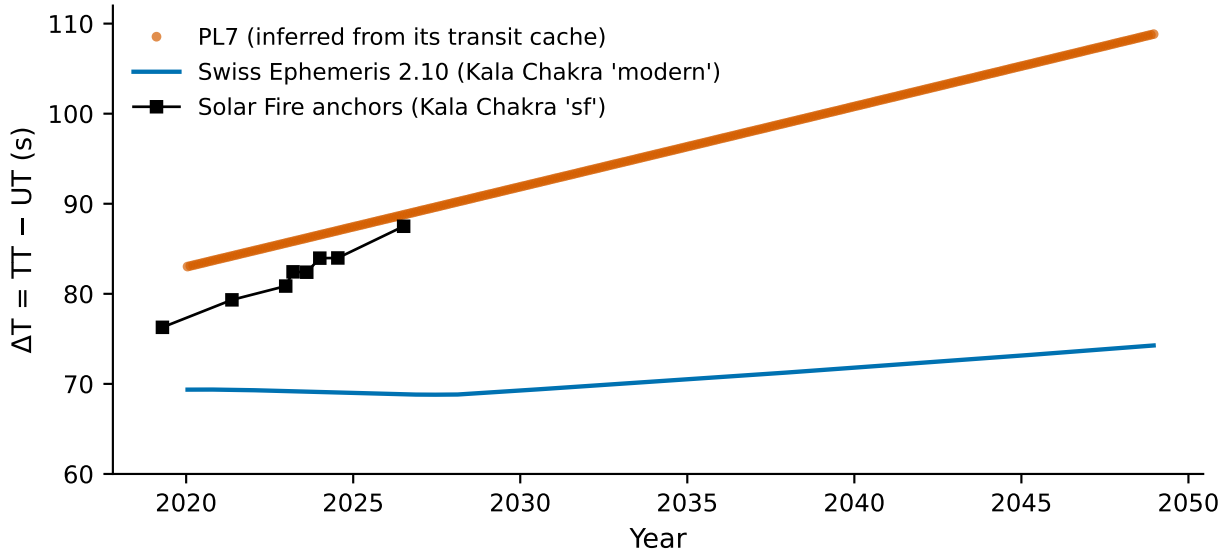


Figure 1: PL7 and Solar Fire both over-estimate ΔT; PL7 by 14–20 s over 2020–2026. *What is shown.* Orange points: ΔT implied by PL7's cached Moon longitudes, one point per cached month (348 months, 2020–2048), obtained by dividing the Moon residual against the Swiss Ephemeris by the Moon's speed. Blue line: the Swiss Ephemeris 2.10 value used by Kala Chakra's *modern* mode. Black squares: the eight Solar Fire anchors used by Kala Chakra's *sf* mode (`ephemeris.js`). *What to take from it.* In the years the family uses (2020–2026) PL7's ΔT is 1–5 s larger than Solar Fire's, which moves the Moon by about 1–3″; planets are unaffected at the arcsecond level.

In plain words. ΔT only matters for the Moon. A 5-second disagreement moves the Moon by about 3″, which is far below the width of a KP sub (the smallest is 40′), so this difference is harmless for star and sub lords.

2.3 Ayanamsa

The ayanamsa is computed in a single routine, `fcn.0055d3ea`, that is short enough to decode completely **[BIN]**. It first evaluates a Lahiri polynomial,

$$A_{\text{Lahiri}} = 22^\circ 27' 37.65'' + 5026.87434''\,T + 1.11113''\,T^2, \qquad T = \frac{\text{JD} - 2451545}{36525} + 1, \tag{1}$$

where T is Julian centuries from the epoch J1900.0 (JD 2415020.0). A one-byte setting (offset `0x67e` of the options object) then selects one of eight branches. For branches 3–8 a second time argument is used,

$$t' = \frac{\text{JD} - 2415020.5}{36524}, \tag{2}$$

which is centuries of 36 524 days counted from 1900 January 0.5. The widget-to-selector mapping was recovered from the dialog constructor (`0x4c01b0`, which names each radio button and stores it at a fixed member offset) and the OK handler (`0x4c6ef0`, which writes the selector according to the checked button) **[BIN]**. The result is Table 1. Finally the routine returns $C - A$, where C is the value typed in the "offset" box of the dialog (`calculations_offsetEdit`, default 0); sidereal longitude is tropical longitude plus this return value.

Three results matter for the family's work **[NUM]**:

1. **PL7's Lahiri is the same Lahiri as Kala Chakra's.** Over 1900–2050 it agrees with the Swiss Ephemeris `SIDM_LAHIRI` to within 0.3″, and with Kala Chakra's Solar-Fire-calibrated value to 1.4″. Lahiri charts from the two programs therefore agree on every star and sub lord except for points lying within 1.4″ of a boundary (0.02 % of random longitudes).

Table 1: PL7's ayanamsa options as decoded from `fcn.0055d3ea`. "Value 2025" is at 2025 January 1 0h UT. "vs SE" is PL7 minus the Swiss Ephemeris ayanamsa of the same name (mean equinox, 2025); "vs KC" is PL7 minus Kala Chakra's effective ayanamsa (Swiss Lahiri $-1.251''$).

Sel.	Button	Formula (A in degrees)	Value 2025	vs SE	vs KC
1	Lahiri (default)	Equation 1	24°12′23.0″	+0.2″	+1.4″
2	None	0 (tropical / sayana)	0	–	–
3	Yukteshwar	$21.015 + 1.5\,t'$ (54″/yr)	22°53′24.2″	+223″	–
4	Raman	$21.013888889 + 1.398148148\,t'$	22°45′41.8″	+5.7″	–
5	Bhasin	$21.363888889 + 1.398148148\,t'$	23°06′41.8″	n/a	–
6	Fagan–Bradley	$23.348888889 + 1.398148148\,t'$	25°05′47.8″	+25″	–
7	Krishnamurti	$22.453973785 + 1.3955235417\,t'$	24°11′54.3″	+320″	−27″
8	Krishnamurti New	$A_{\text{Lahiri}} - 0.101388 + 0.0011118\,t'$	24°06′23.0″	−11″	−359″

2. **"Krishnamurti" (selector 7) is the classical 291 AD straight-line formula.** 22.453974° at 1900 with 50.2388″ yr^{-1} is exactly zero ayanamsa in 291 AD at Krishnamurti's published rate of 50.2388475″ yr^{-1} ($1609 \times 50.2388'' = 22.454°$). Today it is only 27″ smaller than Lahiri, and it differs from the Swiss Ephemeris's `SIDM_KRISHNAMURTI` by about 5′20″.

3. **"Krishnamurti New" (selector 8) is Lahiri minus** 6′05″ (plus a drift of 4″ per century). It is within 11″ of the Swiss Ephemeris KP ayanamsa. If a PL7 user selects it, about 6.8 % of all longitudes acquire a different star or sub lord from the Lahiri value Kala Chakra uses (section 12).

Key idea. The family's charts are cast in Lahiri. PL7 at its default setting uses the same Lahiri ayanamsa as Kala Chakra to within 1.4″. The two KP options in PL7 are genuinely different ayanamsas, and Kala Chakra offers neither.

2.4 True or mean equinox (nutation)

With the Swiss Ephemeris's nutation switched off (`SEFLG_NONUT`), PL7's cached Rahu agrees with the Swiss true node minus Equation 1 to $-0.54'' \pm 0.02''$ in January 2020, and to within $\pm 0.8''$ in every month to 2048; with nutation switched on the residual is $-16.6''$, which is exactly the nutation in longitude $\Delta\psi$ at that date **[NUM]**. PL7 therefore measures sidereal longitudes from the *mean* equinox of date. This is the same convention that the Swiss Ephemeris applies internally in sidereal mode, so it is *not* a difference from Kala Chakra.

2.5 Rahu and Ketu: true node

The cached Rahu matches the Swiss Ephemeris *true* node to sub-arcsecond precision and differs from the mean node by up to 1.4° in a month **[NUM]**. PL7 uses the true node, as does Kala Chakra. Ketu is diametrically opposite.

2.6 House cusps: Placidus, always

The chart-calculation method (code at `0x55fefc`) calls one cusp routine, `fcn.00406c94`, unconditionally: there is no branch on any house-system setting before the call **[BIN]**. That routine carries the debug labels `plac cusp 0` … `plac cusp 4`. It computes the ascendant and MC, then for the intermediate cusps calls an iterative helper (`fcn.0040684a`) with the fractions 1/3 and 2/3 and the angular offsets 30°, 60°, 120°, 150°, using `atan`: the textbook semi-arc trisection that defines the Placidus system **[BIN]**. The twelve cusps are written to an array at offset `0xf0`; elements 0 and 9 (cusp 1 and cusp 10) are then copied to the ascendant and MC fields. The dialog has no house-system option; the manual's discussion of bhavas is in section 5.

Key idea. Your father was right: PL7 casts Placidus cusps. Kala Chakra casts Topocentric (Polich–Page) cusps, which is what Solar Fire Gold was set to.

Latitude. The executable contains no WGS84 constant (neither $(1-f)^2 = 0.99330562$ nor $1-e^2$), so PL7 almost certainly feeds the *geographic* latitude to the house formula, whereas Kala Chakra converts it to *geocentric* latitude, reproducing Solar Fire's "geocentric correction to latitude" option [INF].

How large is the difference? Using the Swiss Ephemeris house functions for 2000 random moments in 2019–2026, Table 2 compares PL7's method (Placidus, geographic latitude) with Kala Chakra's (Topocentric, geocentric latitude) at the two canonical places [NUM]. Placidus and Topocentric cusps on their own differ by only a few arcseconds at these latitudes; almost all of the difference comes from the latitude convention, which shifts the ascendant–descendant axis.

Table 2: Absolute difference between PL7-style cusps (Placidus, geographic latitude) and Kala Chakra cusps (Topocentric, geocentric latitude), in arcseconds, over 2000 random moments in 2019–2026. Cusps 4 and 10 coincide by construction. "Flip" is the share of all cusps whose star or sub lord differs.

	Cusp (mean / max, ″)						
Place	1 & 7	2 & 8	3 & 9	4 & 10	5 & 11	6 & 12	Flip
Singapore (1.28°N)	8 / 12	6 / 8	3 / 4	0 / 0	3 / 4	5 / 8	0.1 %
Lapanga (21.70°N)	149 / 227	126 / 209	71 / 122	0 / 0	70 / 122	125 / 209	1.7 %

2.7 Yogi point

`fcn.0040841f` returns $\mathrm{norm}_{360}(\lambda_\odot + \lambda_{\mathrm{Moon}} + 93°20')$, using sidereal longitudes [BIN]; the constant 93.3333… is stored at `0x5d1948`. This is the standard Yogi point. Its callers also compute nakshatra indices with the helper `fcn.00566b15` (nakshatra $= 1 + \lfloor \lambda / 13°20' \rfloor$) and wrap them into 1…27; the documented definitions of Avayogi and the Duplicate Yogi are given in section 6.

3 The transit viewer and its cache

3.1 How it works

PL7 does not compute the transit animation from scratch each time the time step is changed. The routines `CalcMonthEphem` and `CalcYearEphem` (`fcn.0055dc3f`) fill a cache of planetary longitudes, one file per calendar month, written to `Temp/YYYYM.e31` (for example `20201.e31` is January 2020). Two check boxes in the general options, "read transit cache" and "write transit cache" (`general_readTransitCacheCheckBox`, `general_writeTransitCacheCheckBox`), control whether the files are used [BIN]. Your installation holds 436 such files covering January 2020 to April 2056.

The file format was decoded from the data [NUM]. Bytes 8–23 hold two doubles, the first and last Julian Day of the month (0h UT). From byte 840 there is one block of 64 doubles per body, the block for body i starting at byte $840 + 512\,i$, holding the sidereal longitude every 12 hours (63 samples for a 31-day month). The body order Sun, Moon, Mars, Mercury, Jupiter, Venus, Saturn, Rahu was identified from each series' mean daily motion and position (for example, the first block advances 31.6° in January 2020, the Sun's rate, and the eighth moves retrograde by 0.6°, a node), and confirmed by the sub-arcsecond fits below; the later blocks hold slower outer-planet series and were not used. When you step the viewer forwards or backwards, PL7 interpolates in these 12-hour tables.

3.2 The cache is not accurate for the planets

Comparing the cache with the Swiss Ephemeris (Lahiri as in Equation 1, mean equinox) shows two very different behaviours [NUM]:

- **Moon and Rahu are right.** The Moon agrees after allowing for PL7's larger ΔT (subsection 2.2); Rahu agrees to under $1''$.
- **Every other planet is wrong by up to about** $10'$**,** with an error that oscillates once per lunar month (Figure 2a).

The oscillation has a simple geometric cause. If a planet at geocentric distance Δ were observed not from the centre of the Earth but from a point displaced by the Moon's geocentric vector $\vec{r}_{\mathrm{Moon}}$, its longitude would shift by

$$\delta\lambda \approx k\,\frac{r_{\mathrm{Moon}}}{\Delta}\,\sin(\lambda_{\mathrm{Moon}} - \lambda_{\mathrm{planet}}), \tag{3}$$

with $k = 1$ for the full vector. Regressing each planet's residual on this predictor explains $R^2 = 0.991$–0.999 of the variance, and the fitted coefficient is $k = 0.967 \pm 0.020$ across 36 planet-months (six planets, six months spread over 2020–2045), independent of the planet's distance (Figure 2b) [NUM].

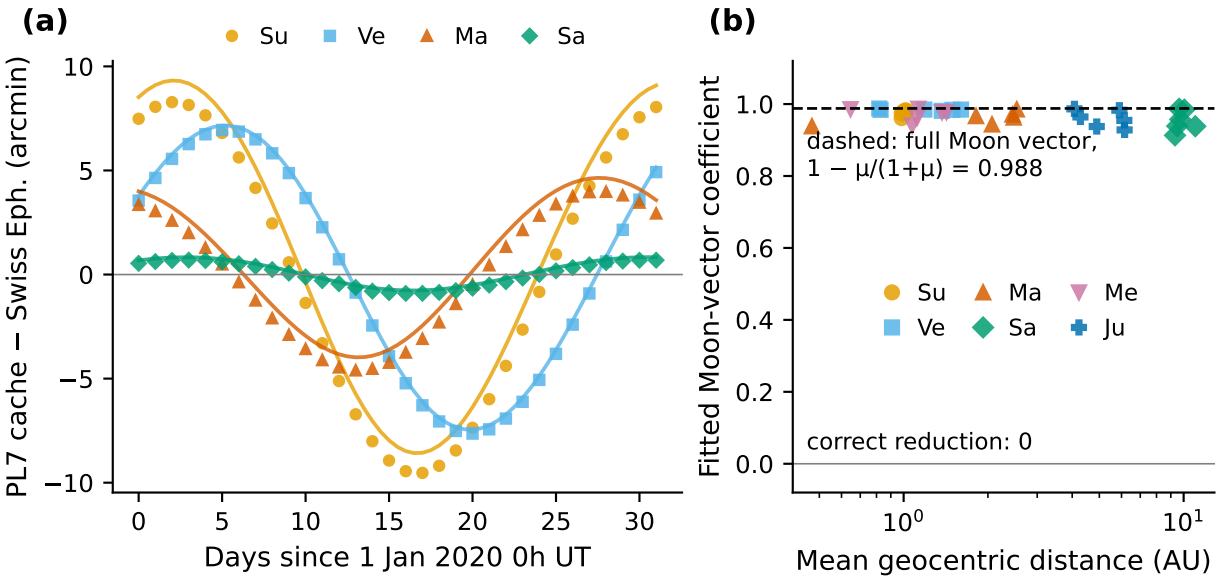


Figure 2: PL7's cached planet positions are displaced as if seen from a point one Moon-distance away from the Earth. *What is shown.* (a) Points: PL7's cached sidereal longitude minus the Swiss Ephemeris value (monthly mean removed) for the Sun, Venus, Mars and Saturn in January 2020, every day; lines: the error predicted by Equation 3 with $k = 1 - \mu/(1+\mu) = 0.988$, no fitting. (b) The coefficient k fitted separately for each of six planets in six months (2020–2045), against the planet's mean geocentric distance on a logarithmic axis. The dashed line is the full-Moon-vector prediction; a correct Earth–Moon reduction would give $k = 0$ (grey line). *What to take from it.* The error is not random noise and not a low-precision ephemeris: it is one specific geometric mistake whose size shrinks with distance (Sun $\sim 9'$, Saturn $\sim 1'$) and which the Moon and Rahu escape.

3.3 Where the error comes from in the code

Planetary series in such ephemerides are stored for the Earth–Moon barycentre (EMB). To obtain the Earth, the Moon's geocentric vector is multiplied by $\mu/(1+\mu)$, where $\mu = M_{\mathrm{Moon}}/M_{\oplus} \approx 1/81.30$, and subtracted from the EMB. In PL7 this reduction is in `fcn.0055e125` [BIN]. It loads $\mu = 0.01230002$ (address `0x5f2e28`) but does *not* divide by the constant $1 + \mu$. Instead it builds

an integer N at run time from four fields of the global application object (offsets `0x91c`, `0x948`, `0x9b4`, `0x928`) and uses $\mu/(N+\mu)$:

$$\text{factor} = \frac{\mu}{N+\mu} = \begin{cases} 0.01215 & N = 1 \text{ (correct)}, \\ 1 & N = 0. \end{cases} \tag{4}$$

With $N = 0$ the whole Moon vector is removed and the planets are seen from a point about 384 000 km from the Earth, consistent with the measured $k = 0.967 \pm 0.020$ (theory 0.988). Both planet routines (all-bodies `fcn.0055ec16` and single-body `fcn.0055e5a6`) call this reduction, and both are reached from the one dispatcher (`fcn.0055fc12`) used for chart calculation **[BIN]**.

The four fields are written mainly inside a block of about ten near-identical code fragments (`0x583c7a`–`0x587xxx`). The PL7 `readme.txt` says that the program shipped with a HASP hardware key. A run-time integer that should equal 1 and silently corrupts results when it does not is a known design for licence-dependent integrity checks. The installation analysed here was set up following instructions that replace `PL7.exe` (`Important.png` in the `GeoVision` folder). The most likely explanation is therefore that this copy runs without the conditions the program expects, and computes $N = 0$ **[INF]**. I did not analyse the licensing code, and the report gives no instructions about it.

Pitfall. Because the natal chart uses the same routines, the natal Sun, Mercury, Venus, Mars, Jupiter and Saturn in *this* installation are probably wrong by up to about 10′ as well, while the Moon, Rahu and Ketu, the ascendant and the cusps, and therefore the Vimshottari dasha, are unaffected. This was *not* directly measured, because the saved charts (`GeoVisionCharts/*.xml`) contain only birth data. A two-minute test is given in section 13.

Question. *"Does this explain why the dasha dates matched Kala Chakra 40/40 while I distrusted the transits?"* Yes. The dasha depends only on the Moon, which this error does not touch; the transit animation shows the planets, which it does.

4 Divisional charts (vargas)

4.1 What PL7 offers

The manual lists sixteen Parashari vargas (D1, D2, D3, D4, D7, D9, D10, D12, D16, D20, D24, D27, D30, D40, D45, D60) and four Tajika vargas: Panchamsha D5, Shashtamsha D6, Ashtamsha D8 and Ekadashamsha D11 **[DOC]** (GeoVision Software and Parashara Software Pvt. Ltd. 2006, pp. 40, 52–53). It also mentions "alternate" vargas marked II or III, without defining them. PL7's own documentation gives *no* computational rule for any varga; the bundled translation of BPHS (`CHAP/CHAP06.TXT`) states the classical rules for D9, D10 and D24 only.

4.2 What the code actually does

All vargas go through one dispatcher, `fcn.0057d9cf`, a 31-way `switch` on the varga's position in the list. A byte table at `0x5f47b8` gives the divisor of each position: $1, 2, 3, 4, 7, 9, 10, 12, 16, 20, 24, 27, 30, 40, 45, 60$ (positions 1–16), then $5, 6, 8, 11$ (the Tajika four), then 150 (Nadiamsha), then ten alternate vargas with divisors $2, 2, 3, 4, 10, 12, 30, 5, 16, 11$ **[BIN]**. There are two kinds of routine:

- **Cyclic.** `fcn.0057d1e1` returns $n\lambda \bmod 360°$, where λ is the sidereal longitude and n the divisor. Counting continuously from Aries in this way *is* the standard Parashari rule for D7,

D9, D16, D20 and D27; for D9 it reproduces "movable from itself, fixed from the 9th, dual from the 5th".

- **Sign-dependent.** D3, D4, D10, D12, D24, D30, D40, D45, D60, D5, D6, D8, D11 and two alternates have their own routines, which take the sign number s (Aries = 1) and the degrees d within the sign.

I re-implemented the routines you asked about exactly as decoded (`scripts/pl7_vargas.py`); Table 3 gives each rule and the starting sign for every sign.

Table 3: Varga rules decoded from `PL7.exe` [BIN]. "Start" is the sign of the first amsa for Aries, Taurus, Gemini … Pisces, taken from the re-implementation. s = sign number (Aries = 1); d = degrees in the sign.

Varga	Routine	Rule	Start (Ar … Pi)
D9 Navamsha	`0057d1e1`	$9\lambda \bmod 360$ (cyclic from Aries)	Ar Cp Li Cn, repeating
D10 Dashamsha	`0057d55c`	odd s: from the sign itself; even s: from the 9th	Ar Cp Ge Pi Le Ta Li Cn Sg Vi Aq Sc
D24 Chatur-vimshamsha	`0057d675`	odd s: from Leo; even s: from Cancer	Le Cn, repeating
D6 Shashtamsha	`0057d4dc`	odd s: from Aries; even s: from Libra	Ar Li, repeating
D8 Ashtamsha	`0057d510`	movable: from Aries; fixed: from Sagittarius; dual: from Leo	Ar Sg Le, repeating
D11 Ekadashamsha	`0057d5a6`	$(11d/30 + 1 - s) \times 30$, identical to $11\lambda \bmod 360$ (cyclic from Aries)	Ar Pi Aq Cp Sg Sc Li Vi Le Cn Ge Ta
D11 alternate (position 31)	`0057d5d6`	$(1 - 11d/30) \times 30$: every sign starts at Aries and counts *backwards*	Ar for all (2nd amsa Pi)
D16 alternate (position 30)	`0057d5fb`	odd s: forwards from the sign; even s: backwards	Ar Le Ge Li Le Sg …

In plain words. On D11: PL7 has two Ekadashamsha rules and no rule named Rudramsha or "Iyer". Its main D11 is the plain continuous count from Aries; its alternate D11 counts backwards from Aries for every sign. If the "Iyer" D11 you have in mind is a third rule, PL7 does not implement it, and Kala Chakra has no D11 at all. Given the rule, it can be added to Kala Chakra as a single function.

Varga strength (Vimshopaka) is offered on 6-, 7-, 10- and 16-varga schemes with scores of 5–20, and the planetary table's "vimshopaka bala" column uses the 10-varga scheme [DOC] (GeoVision Software and Parashara Software Pvt. Ltd. 2006, p. 145). The per-varga weights are not documented and were not decoded.

5 Bhava chalit (the Bhava chart)

PL7 does not use the name "Bhava Chalit"; the equivalent is the *Bhava chart* [DOC]. Three house divisions are offered as special charts (GeoVision Software and Parashara Software Pvt. Ltd. 2006, p. 56):

1. **Bhava (Sripati)**, centred on the ascendant. The tutorial (`Extras1/pib11770`) defines it: the ascendant and MC are the madhyas (centres) of houses 1 and 10 and the opposite points those of 7 and 4; "the spaces in between are further divided in 3 equal portions"; and "the Bhava Sandhis are placed halfway between each pair of adjacent houses". This is Porphyry-style trisection of each quadrant, applied to bhava *centres*.
2. **Bhava (equal)**: each house spans 15° either side of a madhya set by the ascendant degree.

3. **Krishnamurti chart (Placidus)**, in which the ascendant is the *beginning* of the first house; this is the KP cusp chart of subsection 2.6.

Key idea. PL7's "bhava chalit" is a Sripati chart: *centres* at Asc and MC with quadrant trisection. Kala Chakra's houses are KP-style *beginnings* (Topocentric cusps). The two answer different questions, so a planet can legitimately sit in different houses in the two programs even with identical longitudes.

6 Yogi, Avayogi and Duplicate Yogi

The manual never states the Yogi formula; the binary does (subsection 2.7): the Yogi point is Sun + Moon + 93°20′ **[BIN]**. The report templates print "Yogi Point", "Yogi" (the lord of the Yogi point's nakshatra) and a combined field "Avayogi/Duplicate Yogi" (`Extras1/pib337`) **[DOC]**. The dictionary defines Avayogi only as the point opposite the Yogi point (GeoVision Software and Parashara Software Pvt. Ltd. 2006, p. 208); the Duplicate Yogi is not defined at all. Definitions of both vary between authors, and PL7's documentation does not say which it uses; I could not settle them from the code within the time available, so they are left open here rather than filled in from general knowledge. Kala Chakra computes none of these points.

7 Dashas

7.1 Systems and levels

PL7 offers at least twenty dasha systems (Vimshottari, Ashtottari, Shodashottari, Dwadashottari, Panchottari, Shatabdika, Chaturashitisama, Dwisaptatisama, Shastihayani, Shattrimshatsama, Kalachakra, Chara, Sthira, Niryana Shoola, Drig, Yogini, Navamsha, Tribhagi, Tribhagi 40, Narayana, and more below the visible part of the list), shown to at most five levels: maha, antar, pratyantar, sookshma and prana **[DOC]** (GeoVision Software and Parashara Software Pvt. Ltd. 2006, pp. 42–44). The reference body can be the Moon (default), the ascendant or any planet. The balance at birth is computed "by degree" (fraction of 13°20′ traversed, the default) or "by time". Kala Chakra computes Vimshottari only, but to *six* levels (adding deha), by degree from the Moon, anchored once at the chart moment.

7.2 The dasha year: a hidden discrepancy

The Dashas tab offers "360 days or 365.25 days or 327.85 days for a dasha year", and its screenshot shows 365.25 selected **[DOC]** (GeoVision Software and Parashara Software Pvt. Ltd. 2006, pp. 193–194). The code says something different **[BIN]**. The OK handler (`0x4c7dc2`) writes setting byte `0x68c`: 2 for the "360" button, 1 for "365.25" and 3 for "327.85"; the reset-to-defaults routine also sets 1. The year-length function `fcn.00464743` then returns 360.0 for 2 and 327.85 for 3, but for 1 it returns *365.2421875* days (the tropical year), not 365.25. The Vimshottari start is computed as birth minus year length times balance (`fcn.00460018`), and the year-length function is called from six places in the dasha routines (`0x4600e8`, `0x4601af`, `0x460600`, `0x460697`, `0x4606b9`, `0x4709b4`). The constant 365.25 does occur in the same code region, but next to 30.6001, 122.1, 1524 and 1 720 994.5: the Meeus calendar-to-Julian-Day conversion, not a dasha year. Your PL7 dasha screenshots used for the 40/40 check (RA Job, SG, MANTA) show periods within about two years of the chart, consistent with the explanation below.

Why the 40/40 validation could not see this. The two year lengths differ by 0.0078 day, or 11.25 minutes per year of dasha time. Your validation compared dates near the chart moment, within about ±5 years, so the boundaries moved by under an hour and fell on the

same calendar date. For a natal chart the drift grows: about 1.9 h at 10 years from birth and about 11 h at 60 years, which is enough to move pratyantar and sookshma boundaries by a day, and prana boundaries much more.

For horary use, where the periods of interest lie within weeks of the chart, the two programs agree. If exact PL7 parity is ever wanted for long-range natal dashas, Kala Chakra would need 365.2421875-day years. Either way, the knowledge base's description of the PL7 convention as "365.25-day years" should be corrected.

8 The KP section: calculation and display

Cusps. Placidus, with the cusp as the beginning of the house [BIN] [DOC] (GeoVision Software and Parashara Software Pvt. Ltd. 2006, pp. 56, 200).

Ayanamsa. The dictionary says KP printouts use the Krishnamurti ayanamsa "regardless of the default set" (GeoVision Software and Parashara Software Pvt. Ltd. 2006, pp. 218–219). In the code, the only places that write the values 7 or 8 to the ayanamsa selector are in the options dialog. Two printing/model routines (`fcn.00553970`, `fcn.00578e80`) load the selector from a stored record (field `+0x260`), which matches the manual's per-astrologer ayanamsa setting for model printing (GeoVision Software and Parashara Software Pvt. Ltd. 2006, p. 165). Which KP ayanamsa (selector 7 or 8) a KP printout uses was *not determined* [INF].

Lords. The planetary and cusp tables show the nakshatra lord and sub lord (GeoVision Software and Parashara Software Pvt. Ltd. 2006, p. 145). Sub-sub lords are not documented and no sub-sub column exists [DOC].

Display. PL7 has a circular KP chart, whose "inner ring shows the Rashis, the next ring the Nakshatras, the next the houses" (GeoVision Software and Parashara Software Pvt. Ltd. 2006, p. 200), with a table of sub lords, occupants, "tenants" (planets in the nakshatras of occupants), owner and tenants of the owner. There are also four KP worksheets (Krishnamurti, Krishnamurti II, Krishnamurti Prashna, Krishnamurti Prashna II) and two reports. "KP – Chart" gives the birth chart, cuspal chart and "Bhava Details (Placidus System)". "KP – Significators" gives the houses signified by planets, graded from "very strong significator" down; ruling planets (day lord, lagna sign/star/sub lord, Moon sign/star/sub lord); and Fortuna [DOC].

Horary. "Krishnamurti Prashna" is cast for the current time "and the ascendant is based on a number selected by the user" (worksheet help). Two integer-input calls in the binary are bounded at 249 (`0x553f5a`, `0x557a21`), so the number is almost certainly 1–249 [INF]. The number-to-ascendant table was not decoded.

Key idea. For KP horary, Kala Chakra is ahead of PL7 in four concrete ways. It gives a five-level sub-lord chain (PL7 stops at the sub). It computes the family's cusp-number vectors and power calculation, which PL7 has no notion of. It replicates Solar Fire to $\leq 1''$. And it is not affected by the Moon-vector planet error of subsection 3.2. PL7 is ahead in breadth: significator grading, ruling planets, Fortuna, and 1–249 horary ascendants.

9 Jaimini: karakas, padas and special lagnas

Jaimini is implemented in PL7 [DOC]. Everything below comes from the documentation; none of it exists in Kala Chakra.

Chara karakas. A calculation option chooses 8 karakas including Rahu or 7 without (GeoVision Software and Parashara Software Pvt. Ltd. 2006, p. 192). Separately, the worksheet offers "Karakas(8)" and "Karakas(7)", where the 7-karaka scheme merges the mother and children

karakas. Rahu's degree is measured backwards (30 minus its degree in the sign). The default is not documented.

Aspects. Rashi drishti: "fixed signs aspect all the movable signs except the one next to it", and vice versa; dual signs aspect each other (GeoVision Software and Parashara Software Pvt. Ltd. 2006, pp. 216–217).

Arudha padas. A "Jaimini padas and lagnas" worksheet shows the padas of all twelve houses for the birth chart, Navamsha and Dashamsha. The rule is to count from the house to its lord, then as many houses again (GeoVision Software and Parashara Software Pvt. Ltd. 2006, p. 222). The exceptions are stated two different ways:

- The tutorial (`pib11755`): lord in the 4th or 7th gives the 4th house as Arudha Lagna, and lord in the 1st gives the 10th.
- The bundled BPHS (`CHAP29`): a pada falling in the same house goes to the 10th from it, and one falling in the 7th goes to the 4th from the original house.

The two disagree when the lord is in the 7th, and neither says which the engine applies [DOC].

Upapada. "Generally considered as the pada of the 12th house, though there are different views" (GeoVision Software and Parashara Software Pvt. Ltd. 2006, p. 230).

Karakamsha and Swamsha. Both are offered; the Karakamsha chart "takes the sign of the Atma Karaka (AK) in the Navamsha as the ascendant", drawn on the birth chart or on the Navamsha (GeoVision Software and Parashara Software Pvt. Ltd. 2006, p. 57).

Special lagnas. Bhava lagna advances 15° per hour from the Sun's position at sunrise, Hora lagna one sign per hour, and Ghatika lagna one sign per 24 minutes; Varnada, Indu and Pranapada are also given. Sunrise is taken at the Sun's edge or its centre, as an option (GeoVision Software and Parashara Software Pvt. Ltd. 2006, p. 192); the default and the refraction handling are not documented.

Argala. Planets in the 2nd, 4th, 11th and 5th from a point cause argala, obstructed from the 12th, 10th, 3rd and 9th; the direction is reversed for Rahu and Ketu.

10 Guna matching (compatibility)

PL7 offers both systems [DOC] (GeoVision Software and Parashara Software Pvt. Ltd. 2006, pp. 104–106):

- **Ashtakoota** (North Indian), on the Moon's nakshatra: varna, vashya, tara, yoni, graha maitri, gana, bhakoot and nadi, totalling 36. Gana, bhakoot and nadi are flagged as *maha doshas*, and the Pancha-nadi exception is mentioned. The points per koota are not stated in any readable line.
- **Dashakoota** (South Indian, after Kalaprakasika), with three totals printed (Kalaprakasika, B. V. Raman and Ashtakoota methods): "a number below 18 is questionable, between 18 and 24 is good and above 24 is excellent".
- **Manglik (Kuja) dosha**: Mars in the 1st, 2nd, 4th, 7th, 8th or 12th from the ascendant and from the Moon, with seven printed cancellation rules.
- Matching can also be run on planets other than the Moon, and a rashi-distance comparison is offered.

There are no options to configure the koota rules. Kala Chakra has no matching module.

11 The planetary "summariser" table

The planetary-details table has fifteen selectable columns [DOC] (GeoVision Software and Parashara Software Pvt. Ltd. 2006, p. 145): degrees; retrograde/combust flag; sign; nakshatra; pada; nakshatra lord/sub; dignity; shadbala; vimshopaka bala (10 vargas); varga classification; avasthas in the 3-, 5-, 9- and 12-state schemes; and lordships. The cusp table has degrees, sign, nakshatra, pada and nakshatra lord/sub.

Kala Chakra's tables show degree, star lord and the five-level sub chain, house placement, ownership numbers and the power string. They have no retrograde flag (the engine requests no planetary speed), no dignity, no shadbala, no vimshopaka and no avasthas.

12 Side by side: PL7 and Kala Chakra 1.5

Kala Chakra 1.5 here means the single-file app `Kala Chakra v1.5.html` (and its sibling `KAAST Caster v1.5.html`) in `Advanced_Setup/web/dist/`. Its casting engine is `Advanced_Setup/web/src/ephemeris.js`, `kp_logic.js` and `dasha.js`; I checked that the dist files contain these sources byte for byte. Table 4 sets the two engines side by side.

Table 4: The two casting engines compared. Grades refer to the PL7 column; the Kala Chakra column is from its source code.

Item	Parashara's Light 7.0	Kala Chakra 1.5
Ephemeris	Own files (`ephemdat.bin`, `topos*.dat`), J2000 equatorial; precise to end of 2048, coarse fallback after [NUM]	Swiss Ephemeris 2.10.03 (WASM), files 1800–2399
ΔT	1993 table, extrapolated: 83 s (2020) to 109 s (2048) [NUM]	Solar Fire anchors 76–88 s (*sf*) or Swiss ≈ 69 s (*modern*)
Ayanamsa	8 options; default Lahiri = Swiss Lahiri $\pm 0.3''$; two KP variants [BIN]	Lahiri only, Swiss $-1.251''$ (Solar Fire clone)
Equinox	Mean equinox of date [NUM]	Mean equinox of date (Swiss sidereal mode)
Node	True (in this installation; true/mean option exists) [NUM]	True
Planet positions	Geocentric; in this copy displaced by $\approx 0.97\times$ the Moon vector (up to $\sim 10'$) [NUM]	Geocentric apparent, $\leq 1''$ from Solar Fire
House cusps	Placidus, geographic latitude [BIN]/[INF]	Topocentric, geocentric (WGS84) latitude
Bhava chart	Sripati (centres, quadrant trisection) and equal [DOC]	Not offered (houses are KP beginnings)
Rounding	Not determined	Truncated to whole arcseconds
Star/sub lords	Star and sub [DOC]	Star plus five-level sub chain
KP extras	Significators, ruling planets, Fortuna, horary 1–249 [DOC]/[INF]	Cusp-number vectors, span rule, power calculation
Vargas	16 Parashari + 4 Tajika + D150 + 10 alternates [BIN]	None
Yogi points	Yogi = Sun + Moon $+93°20'$ [BIN]	None
Dashas	≥ 20 systems, 5 levels; "365.25" option actually 365.2421875 d [BIN]	Vimshottari, 6 levels, 365.25 d
Jaimini & padas	Karakas (7/8), rashi drishti, arudhas, upapada, special lagnas, argala [DOC]	None
Transit viewer	Animated circle, steps 1 s to 10 yr, via a 12-hourly month cache [BIN]/[NUM]	None (one chart per cast)
Guna matching	Ashtakoota, Dashakoota, Manglik [DOC]	None

12.1 What the differences do to star and sub lords

A KP sub is at least $40'$ wide (the Sun's sub, $13°20' \times 6/120$), so a difference matters only for points lying within that difference of a boundary. Using random longitudes and the cusp simulation of Table 2 [NUM]:

- PL7 Lahiri vs Kala Chakra Lahiri ($1.4''$): 0.02 % of points change star or sub lord.
- PL7 "Krishnamurti" vs Kala Chakra ($27''$): 0.5 %.
- PL7 "Krishnamurti New" vs Kala Chakra ($5'59''$): 6.8 %.
- Placidus with geographic latitude vs Topocentric with geocentric latitude: 0.1 % of cusps at Singapore and 1.7 % at Lapanga.
- The Moon-vector error ($\sim 1'$–$10'$) in this PL7 copy: for an error of about $8'$ against an average sub width of $89'$, roughly one Sun, Mercury or Venus position in ten gets a different sub lord; the Moon and the nodes are unaffected.

Key idea. For the family's KP horary work the casting engines differ in three choices, Lahiri versus KP ayanamsa, Placidus versus Topocentric, and the latitude convention, plus one defect specific to this PL7 copy. Kala Chakra's choices were made deliberately to replicate the Solar Fire profile the family uses, and they are validated against the family's own hand-calculated charts. That validation, not either program, is the authority for the method.

13 Tests you can run in PL7 yourself

These take a few minutes each and settle the points this report could only infer.

1. **Is this copy's Sun wrong?** Cast one chart in PL7 with Lahiri, say for 1 January 2020 at 0:00 UT (5:30 IST) at any place, and read the Sun to the second. Cast the same moment in KAAST Caster in *modern* mode, which gives about $255°52'40''$ (Sagittarius $15°52'40''$). PL7's own transit cache holds $256°01'09''$ for that instant, $8'29''$ larger. If PL7's chart shows the larger value, the Moon-vector error is present in natal charts too. The Moon should agree to about $10''$ (PL7's larger ΔT accounts for about $7''$).
2. **Which KP ayanamsa does the KP printout use?** Set the Calculation tab to Lahiri, print the Krishnamurti chart, and read the "KP Ayanamsha" line. Compare with Table 1: about $24°11'54''$ (Krishnamurti) or $24°06'23''$ (Krishnamurti New) at 1 January 2025.
3. **Rahu true or mean.** In Options → Calculation → Miscellaneous, check the "Rahu & Ketu" item; the cache says *true* in this installation.
4. **D11.** Display the Ekadashamsha and its alternate (II/III) version for a planet at Taurus 1°: the main D11 should put it in Pisces, the alternate in Aries.

14 Limitations

PL7 was never run. Everything about its numerical behaviour comes from the transit cache, which covers 2020–2056 and holds planets and nodes but not cusps. The cusp comparison of Table 2 is therefore a simulation of PL7's method with the Swiss Ephemeris house functions, not a measurement of PL7's own cusps. The claim that PL7 uses geographic latitude rests on the absence of the WGS84 constants. The statement that the Moon-vector error also affects natal charts rests on shared code paths, not on a measured natal chart. The link between that error and

the licence state is an inference from the code structure and the installation notes; the licensing code itself was deliberately not analysed.

Without a decompiler, routines were read from x87 disassembly. The short routines (ayanamsa, vargas, Yogi point, dasha year, Earth–Moon factor) were decoded in full; the Placidus routine was identified by its structure, its debug labels and its constants rather than traced instruction by instruction. The ephemeris data files were not decoded, so the underlying theory (VSOP, a JPL development or other) and the lower date limit are unknown. Where the manual and the code disagree (dasha year) or the manual is silent (D6, D8, D11, Yogi), this report follows the code. Where neither was conclusive (Avayogi, Duplicate Yogi, arudha exceptions, which KP ayanamsa the KP printout forces, chara-karaka default), the report says so instead of filling the gap from general astrological knowledge.

AI Tool Declaration

This report was prepared with Claude (Anthropic) running in Claude Code, which performed the binary analysis through REA and Rizin, wrote and ran the numerical scripts, and drafted the text. A sub-agent read the PL7 documentation; every page citation was checked against the extracted manual text. The conclusions should be read with the evidence grades in mind.

References

GeoVision Software and Parashara Software Pvt. Ltd. (2006). *Parashara's Light 7.0: User's Manual*. English PL 7 Manual, 3 March 2006. Distributed with the program as `PL70.pdf`, 239 pp. Parashara Software Pvt. Ltd. Jaipur.

morluto (2026). *REA: Reverse Engineer Anything*. Version 6.5.0. URL: https://github.com/morluto/rea (visited on 10/17/2026).

A Key addresses in `PL7.exe`

Address	Role
`0x55d3ea`	Ayanamsa: Lahiri polynomial plus 8-way selector (byte `+0x67e`), user offset (`+0x250`)
`0x4c01b0 / 0x4c6ef0`	Calculation dialog: radio-button construction / OK handler writing the selector
`0x5682d6`	Reset to defaults: selector = 1 (Lahiri), offset = 0, dasha year byte = 1
`0x405cc3, 0x5822cb`	Temporary switch to tropical (selector 2) for sayana quantities
`0x55fefc`	Chart method: calls the cusp routine unconditionally, copies Asc and MC
`0x406c94`	Placidus cusps ("plac cusp" labels, semi-arc trisection helper 0x40684a)
`0x55de40`	Ephemeris reader (`EQU2000` frame, date-range check)
`0x55e125`	Earth–Moon reduction; factor $\mu/(N+\mu)$ with run-time N
`0x55ec16 / 0x55e5a6`	All-planets / single-planet position routines
`0x55fc12`	Dispatcher for planet calculation
`0x55dc3f`	`CalcMonthEphem` / `CalcYearEphem` (transit cache)
`0x40841f`	Yogi point: Sun + Moon $+93°20'$
`0x464743`	Dasha year length: 360 / 327.85 / 365.2421875 days
`0x460018`	Vimshottari start epoch from the balance
`0x57d9cf`	Varga dispatcher (31 cases); divisor table at 0x5f47b8

Address	Role
`0x57d1e1`	Cyclic varga $n\lambda$ mod 360
`0x57d55c, 0x57d675, 0x57d4dc, 0x57d510, 0x57d5a6`	D10, D24, D6, D8, D11 respectively
`0x57d5d6, 0x57d5fb`	Alternate D11, alternate D16
`0x553f5a, 0x557a21`	Integer inputs bounded at 249 (KP horary number)

B Citation provenance

Table 6: Citation provenance ledger: every reference, where it was accessed, what was read, the claim it supports and the supporting passage in the source.

Key	Reference	Cited where	Claim in manuscript	What the source says (as read)	Location	Accessed from	Read	Status
geovision2006pl7	GeoVision / Parashara Software (2006). Parashara's Light 7.0 User's Manual (English PL 7 Manual, 3 March 2006). Bundled as PL7/PL70.pdf.	Vargas §: list	PL7 lists sixteen Parashari vargas	"There are sixteen Vargas (divisional charts), including the birth chart."	p. 40	user-supplied-pdf	FULL+FIG	VERIFIED
geovision2006pl7	GeoVision / Parashara Software (2006). Parashara's Light 7.0 User's Manual (English PL 7 Manual, 3 March 2006). Bundled as PL7/PL70.pdf.	Vargas §: Tajika	Four Tajika vargas D5, D6, D8, D11	"The Tajika Vargas are the Panchamsha (1/5 division of a sign), the Shashtiamsha (1/6 division), Ashtamsha (1/8 division) and Ekadashamsha (1/11 division of a sign)."	pp. 52-53	user-supplied-pdf	FULL+FIG	VERIFIED
geovision2006pl7	GeoVision / Parashara Software (2006). Parashara's Light 7.0 User's Manual (English PL 7 Manual, 3 March 2006). Bundled as PL7/PL70.pdf.	Vargas §: vimshopaka	Vimshopaka column uses 10 vargas	"vimshopaka bala gives the vimshopaka strength for a group of 10 vargas"	p. 145	user-supplied-pdf	FULL+FIG	VERIFIED
geovision2006pl7	GeoVision / Parashara Software (2006). Parashara's Light 7.0 User's Manual (English PL 7 Manual, 3 March 2006). Bundled as PL7/PL70.pdf.	Bhava §	Three house divisions: Sripati, equal, Krishnamurti (Placidus); Sripati centred on Asc, KP begins at Asc	"The 'Krishnamurti Chart' is based on the Placidious system of calculation of houses. The Bhava (Sripati) and Bhava (equal) charts treat the ascendant as the center of the first house."	p. 56	user-supplied-pdf	FULL+FIG	VERIFIED
geovision2006pl7	GeoVision / Parashara Software (2006). Parashara's Light 7.0 User's Manual (English PL 7 Manual, 3 March 2006). Bundled as PL7/PL70.pdf.	Yogi §	Avayogi defined only as the point opposite the Yogi point	"Ava Yogi : The point opposite the Yogi point that has an effect on a person's wealth."	p. 208 (Dictionary)	user-supplied-pdf	FULL+FIG	VERIFIED
geovision2006pl7	GeoVision / Parashara Software (2006). Parashara's Light 7.0 User's Manual (English PL 7 Manual, 3 March 2006). Bundled as PL7/PL70.pdf.	Dashas §: levels	At most five dasha levels; default display four	"You can see at most 5 levels at once (Prana dashas)."	p. 42	user-supplied-pdf	FULL+FIG	VERIFIED

continued on next page

Key	Reference	Cited where	Claim in manuscript	What the source says (as read)	Location	Accessed from	Read	Status
geovision2006pl7	GeoVision / Parashara Software (2006). Parashara's Light 7.0 User's Manual (English PL 7 Manual, 3 March 2006). Bundled as PL7/PL70.pdf.	Dashas §: year	UI offers 360, 365.25, 327.85-day dasha years	"Dasha Year : Choose to use either 360 days or 365.25 days or 327.85 days for a dasha year."	p. 193	user-supplied-pdf	FULL+FIG	VERIFIED
geovision2006pl7	GeoVision / Parashara Software (2006). Parashara's Light 7.0 User's Manual (English PL 7 Manual, 3 March 2006). Bundled as PL7/PL70.pdf.	KP §: ayanamsa	KP printouts force the Krishnamurti ayanamsa	"Krishnamurti printouts use the Krishnamurti ayanamsha regardless of the default set"	pp. 218-219 (Dictionary)	user-supplied-pdf	FULL+FIG	VERIFIED
geovision2006pl7	GeoVision / Parashara Software (2006). Parashara's Light 7.0 User's Manual (English PL 7 Manual, 3 March 2006). Bundled as PL7/PL70.pdf.	KP §: per-astrologer settings	Model printing stores a preferred ayanamsa per astrologer	"Select the prefered 'Ayanamsha'. Also select between true and mean Rahu and the desired chart style."	p. 165	user-supplied-pdf	FULL+FIG	VERIFIED
geovision2006pl7	GeoVision / Parashara Software (2006). Parashara's Light 7.0 User's Manual (English PL 7 Manual, 3 March 2006). Bundled as PL7/PL70.pdf.	KP §: lords	Tables show nakshatra lord and sub lord	"nakshatra lord/sub gives the lord(ruler) of the nakshatra and the sublord"	p. 145	user-supplied-pdf	FULL+FIG	VERIFIED
geovision2006pl7	GeoVision / Parashara Software (2006). Parashara's Light 7.0 User's Manual (English PL 7 Manual, 3 March 2006). Bundled as PL7/PL70.pdf.	KP §: display	Circular KP chart with rashi, nakshatra and house rings	"The inner ring shows the Rashis, the next ring the Nakshatras, the next the houses with their numbers inside."	p. 200	user-supplied-pdf	FULL+FIG	VERIFIED
geovision2006pl7	GeoVision / Parashara Software (2006). Parashara's Light 7.0 User's Manual (English PL 7 Manual, 3 March 2006). Bundled as PL7/PL70.pdf.	Jaimini §: karakas	8 karakas with Rahu or 7 without	"Select Rahu too, to use 8 karakas, including Rahu. Select No Rahu to use just 7 karakas."	p. 192	user-supplied-pdf	FULL+FIG	VERIFIED
geovision2006pl7	GeoVision / Parashara Software (2006). Parashara's Light 7.0 User's Manual (English PL 7 Manual, 3 March 2006). Bundled as PL7/PL70.pdf.	Jaimini §: aspects	Rashi drishti rule	"Fixed signs aspect all the movable signs except the one next to it."	pp. 216-217 (Dictionary)	user-supplied-pdf	FULL+FIG	VERIFIED

continued on next page

Key	Reference	Cited where	Claim in manuscript	What the source says (as read)	Location	Accessed from	Read	Status
geovision2006pl7	GeoVision / Parashara Software (2006). Parashara's Light 7.0 User's Manual (English PL 7 Manual, 3 March 2006). Bundled as PL7/PL70.pdf.	Jaimini §: padas	Pada counting rule	"Counting as many houses away from a house lord as the house lord is away from it's house gives the pada of a house."	p. 222 (Dictionary)	user-supplied-pdf	FULL+FIG	VERIFIED
geovision2006pl7	GeoVision / Parashara Software (2006). Parashara's Light 7.0 User's Manual (English PL 7 Manual, 3 March 2006). Bundled as PL7/PL70.pdf.	Jaimini §: upapada	Upapada is generally the pada of the 12th	"It is generally considered as the pada of the 12th house, though there are different views as to it's correct calculation."	p. 230 (Dictionary)	user-supplied-pdf	FULL+FIG	VERIFIED
geovision2006pl7	GeoVision / Parashara Software (2006). Parashara's Light 7.0 User's Manual (English PL 7 Manual, 3 March 2006). Bundled as PL7/PL70.pdf.	Jaimini §: Karakamsha	Karakamsha in birth chart and in Navamsha	"The Karakamsha chart takes the sign of the Atma Karaka (AK) in the Navamsha as the ascendant for the Karakamsha chart."	p. 57	user-supplied-pdf	FULL+FIG	VERIFIED
geovision2006pl7	GeoVision / Parashara Software (2006). Parashara's Light 7.0 User's Manual (English PL 7 Manual, 3 March 2006). Bundled as PL7/PL70.pdf.	Guna §	Dashakoota score bands	"A number below 18 is questionable, between 18 and 24 is good and above 24 is excellent."	p. 106	user-supplied-pdf	FULL+FIG	VERIFIED
geovision2006pl7	GeoVision / Parashara Software (2006). Parashara's Light 7.0 User's Manual (English PL 7 Manual, 3 March 2006). Bundled as PL7/PL70.pdf.	Engine §: Lahiri default	Lahiri is the default ayanamsa	"By default the Lahiri Ayanamsha is used."	p. 190	user-supplied-pdf	FULL+FIG	VERIFIED
geovision2006pl7	GeoVision / Parashara Software (2006). Parashara's Light 7.0 User's Manual (English PL 7 Manual, 3 March 2006). Bundled as PL7/PL70.pdf.	Jaimini §: sunrise option	Sunrise from limb or centre is an option	"Some people use the edge of the Sun for this calculation, and others use the exact, astronomical longitude of the Sun."	p. 192	user-supplied-pdf	FULL+FIG	VERIFIED
morluto2026rea	morluto (2026). REA: Reverse Engineer Anything. GitHub repository and rea-agents npm package v6.5.0.	Methods §	REA connects an agent to native-binary analysis engines and returns evidence records	"REA connects your agent to tools for inspecting native binaries, JavaScript and Electron apps, .NET assemblies, and websites."	README (repository main, cloned 2026-10-17)	publisher-direct	FULL_TEXT	VERIFIED