(b) Global-Sparse Query-Water Cross Attention — GSQWCA

全局–稀疏交叉注意力 | Dense context + sparse context + query-adaptive branch routing

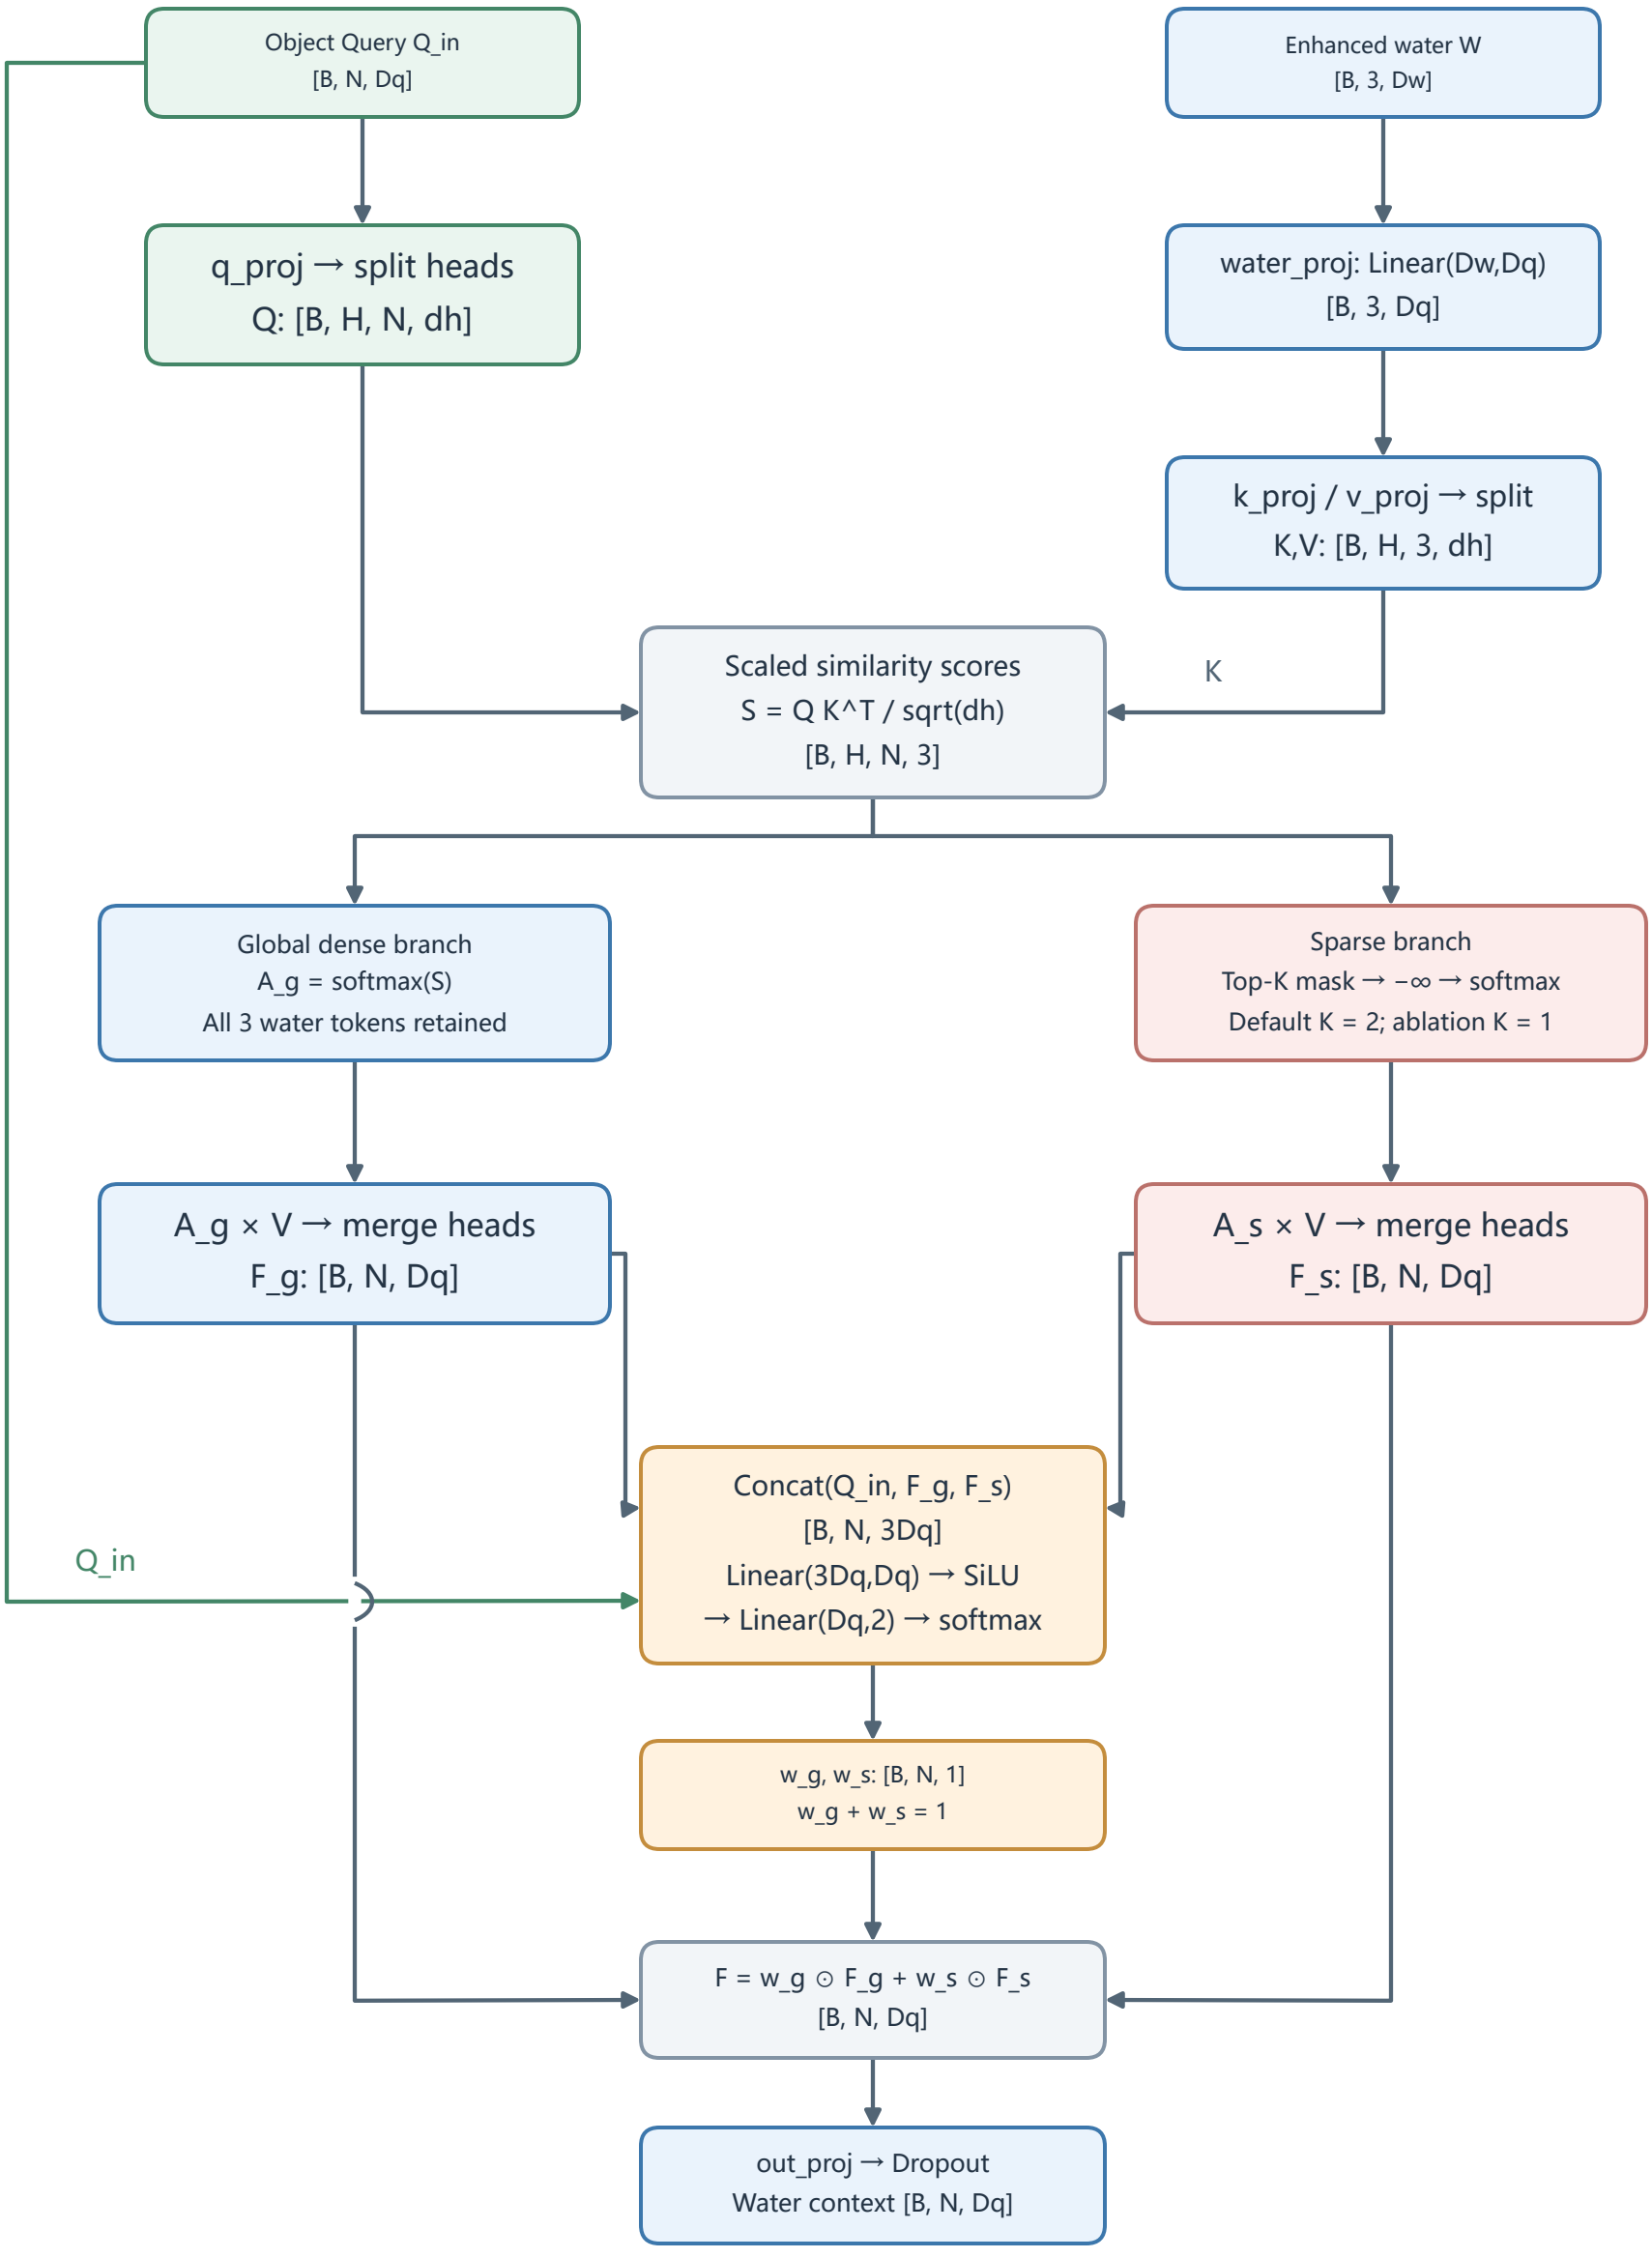

Dq = 128, Dw = 64, H = 8, dh = 16; each decoder layer has its own query-adaptive router.

Router final Linear weight/bias = 0 at initialization: w_g = w_s = 0.5 for every query.

This module returns context only; query injection is performed by CQWG. Shared K,V serve both branches.